

# COPY

Form 3160-3  
(April 2004)

**BBC  
CONFIDENTIAL**

FORM APPROVED  
OMB No. 1004-0137  
Expires March 31, 2007

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

### APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU-008107
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name n/a
2. Name of Operator BILL BARRETT CORPORATION		7. If Unit or CA Agreement, Name and No. Peter's Point Unit/UTU-063014
3a. Address 1099 18th Street, Suite 2300 Denver CO 80202	3b. Phone No. (include area code) (303) 312-8134	8. Lease Name and Well No. Peter's Point Unit Fed #16-27-12-16
4. Location of Well (Report location clearly and in accordance with any State requirements.*) At surface SESE, 1037' FSL, 802' FEL 576855X At proposed prod. zone same 4399120Y -110.103055		9. API Well No. pending 43007-31318
14. Distance in miles and direction from nearest town or post office* approximately 50 miles from Myton, Utah		10. Field and Pool, or Exploratory Peter's Point/Wasatch-Mesaverde 40
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 802'	16. No. of acres in lease 640	11. Sec., T. R. M. or Blk. and Survey or Area Sec. 27, T12S-R16E
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 16'	19. Proposed Depth 7700'	12. County or Parish Carbon
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 7196' ungraded ground	22. Approximate date work will start* 08/30/2007	13. State UT
20. BLM/BIA Bond No. on file Nationwide Bond #WYB000040		
23. Estimated duration 45 days		

#### 24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

- |   |  |
|---|--|
| 1. Well plat certified by a registered surveyor.  | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).    |
| 2. A Drilling Plan.   | 5. Operator certification  |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature <i>Tracey Fallang</i>	Name (Printed/Typed) Tracey Fallang	Date 7/26/07
Title Environmental/Regulatory Analyst		
Approved by (Signature) <i>Bradley G. Hill</i>	Name (Printed/Typed) BRADLEY G. HILL	Date 08-02-07
Title ENVIRONMENTAL MANAGER		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on page 2)

**RECEIVED  
JUL 27 2007**

**Federal Approval of this  
Action is Necessary**

**DIV. OF OIL, GAS & MINING**

T12S, R16E, S.L.B.&M.

**BILL BARRETT CORPORATION**



Well location, PETERS POINT UNIT FEDERAL #16-27-12-16, located as shown in the SE 1/4 SE 1/4 of Section 27, T12S, R16E, S.L.B.&M., Carbon County, Utah.

**BASIS OF ELEVATION**

COTTON TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 31, T12S, R16E, S.L.B.&M., TAKEN FROM THE TWIN HOLLOW QUADRANGLE, UTAH, CARBON COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 7386 FEET.

**BASIS OF BEARINGS**

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

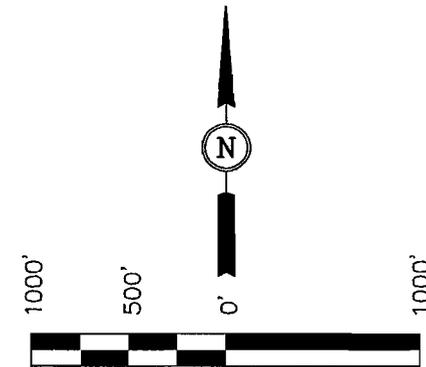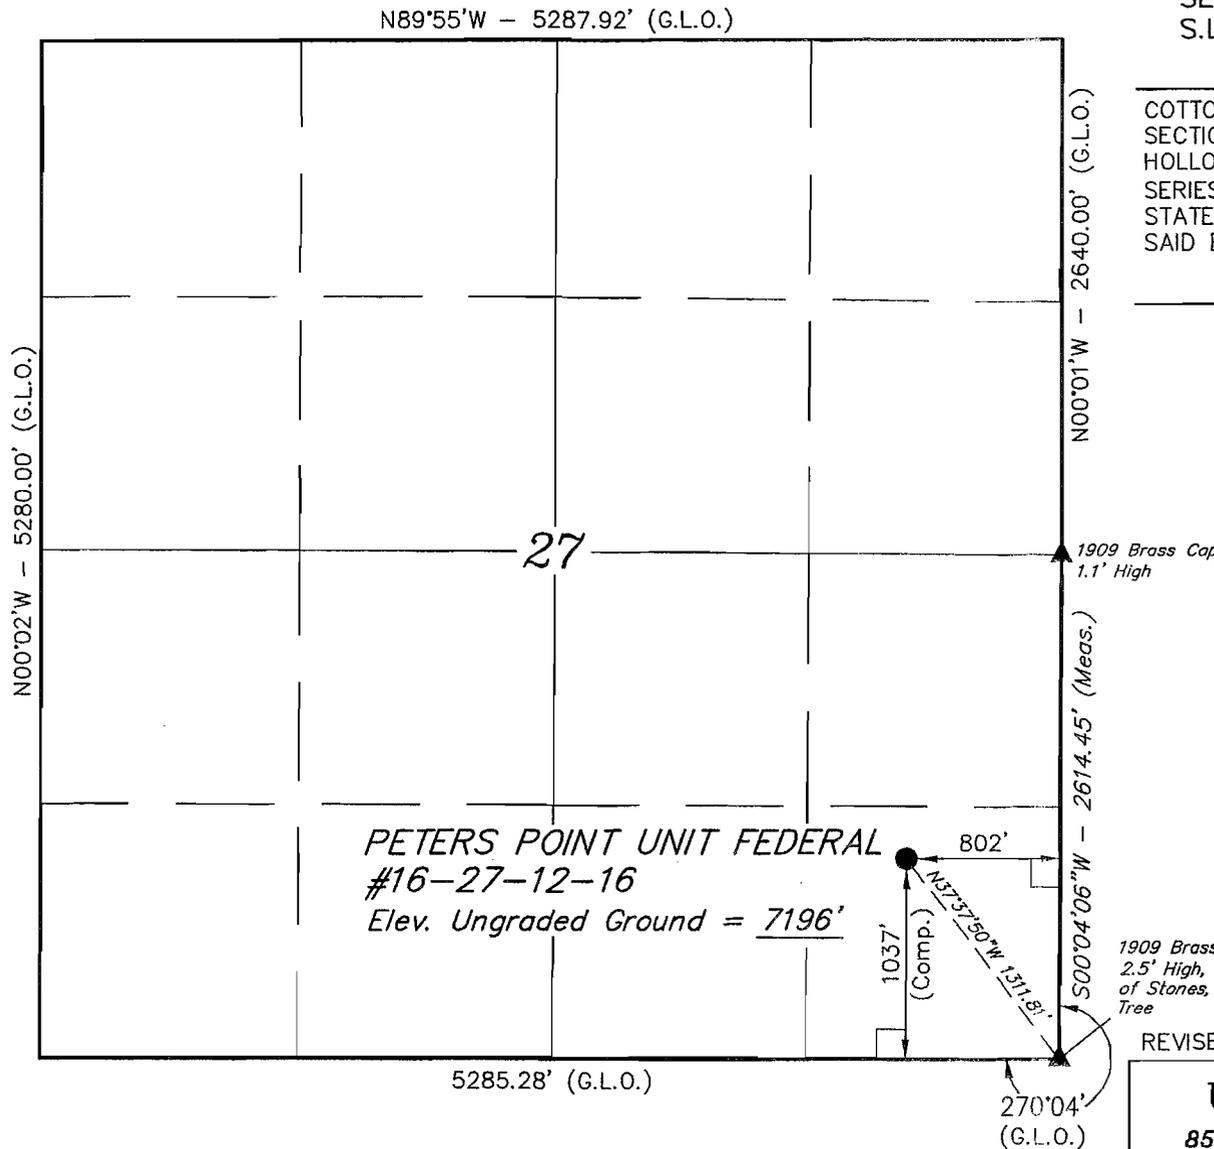

SCALE

**CERTIFICATE**

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



1909 Brass Cap  
2.5' High, Pile  
of Stones, Bearing  
Tree

REVISED: 06-26-07 P.M.

PETERS POINT UNIT FEDERAL  
#16-27-12-16  
Elev. Ungraded Ground = 7196'

(NAD 83)  
LATITUDE = 39°44'25.92" (39.740533)  
LONGITUDE = 110°06'13.74" (110.103817)  
(NAD 27)  
LATITUDE = 39°44'26.05" (39.740569)  
LONGITUDE = 110°06'11.19" (110.103108)

**LEGEND:**

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

**UINTAH ENGINEERING & LAND SURVEYING**  
85 SOUTH 200 EAST - VERNAL, UTAH 84078  
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 01-14-06	DATE DRAWN: 02-10-06
PARTY D.R.    A.H.    S.L.	REFERENCES G.L.O. PLAT	
WEATHER COOL	FILE BILL BARRETT CORPORATION	

## HAZARDOUS MATERIAL DECLARATION

FOR WELL NO. PETER'S POINT UNIT FEDERAL #16-27-12-16  
LEASE NO. UTU 008107

Bill Barrett Corporation guarantees that during the drilling and completion of the above referenced well, we will not use, produce, or store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Super Amendments and Reauthorization Act (SARA) of 1986.

Bill Barrett Corporation guarantees that during the drilling and completion of the above referenced well, we will use, produce, store, transport, or dispose less than the threshold planning quantity (TPQ) of any extremely hazardous substances as defined in 40 CFR 355.

## DRILLING PROGRAM

BILL BARRETT CORPORATION  
*Peter's Point Unit Federal #16-27-12-16*  
 SESE, 1037' FSL, 802' FEL, Section 27, T12S-R16E  
 Carbon County, Utah

1 – 2. Estimated Tops of Geological Markers and Formations Expected to Contain Water, Oil and Gas and Other Minerals

<u>Formation</u>	<u>Depth - MD</u>
Green River	Surface
Wasatch	3285'*
North Horn	5235'*
Dark Canyon	6635'*
Price River	6910'*
TD	7700'*

**PROSPECTIVE PAY**

\*Members of the Mesaverde formation and Wasatch formation (inclusive of the North Horn) are primary objectives for oil/gas.

3. BOP and Pressure Containment Data

<u>Depth Intervals</u>	<u>BOP Equipment</u>
0 – 1000'	No pressure control required
1000' – TD	11" 3000# Ram Type BOP 11" 3000# Annular BOP
<ul style="list-style-type: none"> <li>- Drilling spool to accommodate choke and kill lines;</li> <li>- Ancillary and choke manifold to be rated @ 3000 psi;</li> <li>- Ancillary equipment and choke manifold rated at 3,000#. All BOP and BOPE tests will be in accordance with the requirements of onshore Order No. 2;</li> <li>- The BLM and the State of Utah Division of Oil, Gas and Mining will be notified 24 hours in advance of all BOP pressure tests.</li> <li>- BOP hand wheels may be underneath the sub-structure of the rig if the drilling rig used is set up to operate most efficiently in this manner.</li> </ul>	

4. Casing Program

<u>Hole Size</u>	<u>SETTING DEPTH (FROM) (TO)</u>		<u>Casing Size</u>	<u>Casing Weight</u>	<u>Casing Grade</u>	<u>Thread</u>	<u>Condition</u>
12 ¼"	surface	1,000'	9 5/8"	36#	J or K 55	ST&C	New
7 7/8" & 8 ¾"	surface	7,700'	5 ½"	17#	N-80	LT&C	New
Note: Pending evaluation of anticipated stress on the production casing, BBC may use 5 ½", 20# P-110 LT&C production casing instead of the 17# N-80. BBC is also evaluating the benefit of using 4-1/2", 11.6#, I-80, LT&C production casing and wishes to have that option approved in this APD. The 4-1/2" casing design sheet is included in this package. Cement volumes would be adjusted accordingly.							

5. **Cementing Program**

9 5/8" Surface Casing	Approximately 240 sx Halliburton Light Premium with additives mixed at 12.7 ppg (yield = 1.85 ft <sup>3</sup> /sx) and 170 sx Premium cement with additives mixed at 15.8 ppg (yield = 1.16 ft <sup>3</sup> /sx) circulated to surface with 100% excess
5 1/2" Production Casing	Approximately 1500 sx 50/50 Poz Premium cement with additives mixed at 13.4 ppg (yield = 1.49 ft <sup>3</sup> /sx). Top of cement to be determined by log and sample evaluation; estimated TOC 900'.
Note: Actual volumes to be calculated from caliper log.	

6. **Mud Program**

<u>Interval</u>	<u>Weight</u>	<u>Viscosity</u>	<u>Fluid Loss (API filtrate)</u>	<u>Remarks</u>
0 – 40'	8.3 – 8.6	27 – 40	--	Native Spud Mud
40' – 1000'	8.3 – 8.6	27 – 40	15 cc or less	Native/Gel/Lime
1000' – TD	8.6 – 9.5	38-46	15 cc or less	LSND/DAP
Note: Sufficient mud materials to maintain mud properties, control lost circulation and to contain "kicks" will be available at wellsite. BBC may require minor amounts of diesel to be added to its fluid system in order to reduce tork and drag.				
Note: Air drilling is not anticipated for this location. However, in the event air drilling should occur:				
<ul style="list-style-type: none"> <li>- Fresh water would be used to suppress the dust coming out. The blooie line, approximately 37' long and 6" diameter, would run from the pit to the wellhead. There is no ignition system as burnable gas should not be encountered.</li> <li>- Capacity of compressor: 1250SCFM with an 1170 SCFM on standby, which would be located very near the wellbore. The compressor has switches to shut off should any problems be encountered.</li> <li>- The rig has mud pumps capable of pumping the kill fluid (fresh water), of which there is 500 bbls on location at all times.</li> </ul>				

7. **Testing, Logging and Core Programs**

Cores	None anticipated;
Testing	None anticipated; drill stem tests may be run on shows of interest;
Sampling	30' to 50' samples; surface casing to TD. Preserve samples all show intervals;
Surveys	Run every 1000' and on trips, slope only;
Logging	DIL-GR-SP, FDC-CNL-GR-CAL-Pe-Microlog, Sonic-GR, all TD to surface.

Bill Barrett Corporation  
Drilling Program  
Peter's Point Unit Federal #16-27-12-16  
Carbon County, Utah

8. **Anticipated Abnormal Pressures or Temperatures**

No abnormal pressures or temperatures or other hazards are anticipated.

Maximum anticipated bottom hole pressure equals approximately 3804 psi\* and maximum anticipated surface pressure equals approximately 2110 psi\*\* (bottom hole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

\*Max Mud Wt x 0.052 x TD = A (bottom hole pressure)

\*\*Maximum surface pressure = A - (0.22 x TD)

---

9. **Auxiliary Equipment**

- a) Upper kelly cock; lower Kelly cock will be installed while drilling
- b) Inside BOP or stab-in valve (available on rig floor)
- c) Safety valve(s) and subs to fit all string connections in use
- d) Mud monitoring will be visually observed

10. **Drilling Schedule**

Location Construction: August 30, 2007  
Spud: September 5, 2007  
Duration: 15 days drilling time  
30 days completion time

Well name:	Utah: West Tavaputs Field
Operator:	Bill Barrett
String type:	Surface
Location:	Carbon County, UT

**Design parameters:**

**Collapse**

Mud weight: 9.50 ppg

Design is based on evacuated pipe.

**Minimum design factors:**

**Collapse:**

Design factor 1.125

**Environment:**

H2S considered? No

Surface temperature: 75.00 °F

Bottom hole temperature: 89 °F

Temperature gradient: 1.40 °F/100ft

Minimum section length: 1,000 ft

**Burst:**

Design factor 1.00

Cement top: Surface

**Burst**

Max anticipated surface

pressure: 2,735 psi

Internal gradient: 0.22 psi/ft

Calculated BHP 2,955 psi

Annular backup: 9.50 ppg

**Tension:**

8 Round STC: 1.80 (J)

8 Round LTC: 1.80 (J)

Buttress: 1.80 (J)

Premium: 1.80 (J)

Body yield: 1.80 (B)

Tension is based on buoyed weight.

Neutral point: 859 ft

Non-directional string.

**Re subsequent strings:**

Next setting depth: 10,000 ft

Next mud weight: 9.500 ppg

Next setting BHP: 4,935 psi

Fracture mud wt: 10.000 ppg

Fracture depth: 10,000 ft

Injection pressure 5,195 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft <sup>3</sup> )
1	1000	9.625	36.00	J/K-55	ST&C	1000	1000	8.796	71.2
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	493	2020	4.094	2735	3520	1.29	31	453	14.64 J

Prepared Dominic Spencer  
by: Bill Barrett

Phone: (303) 312-8143  
FAX: (303) 312-8195

Date: August 1, 2003  
Denver, Colorado

**Remarks:**

Collapse is based on a vertical depth of 1000 ft, a mud weight of 9.5 ppg. The casing is considered to be evacuated for collapse purposes.

Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	Utah: West Tavaputs
Operator:	Bill Barrett
String type:	Production
Location:	Carbon County, UT

**Design parameters:**

Collapse  
Mud weight: 9.50 ppg

Design is based on evacuated pipe.

**Minimum design factors:**

Collapse:  
Design factor 1.125

**Environment:**

H2S considered? No  
Surface temperature: 75.00 °F  
Bottom hole temperature: 215 °F  
Temperature gradient: 1.40 °F/100ft  
Minimum section length: 1,500 ft

**Burst**

Max anticipated surface pressure: 4,705 psi  
Internal gradient: 0.02 psi/ft  
Calculated BHP: 4,935 psi

Annular backup: 9.50 ppg

Burst:  
Design factor 1.00

Cement top: 2,375 ft

Tension:  
8 Round STC: 1.80 (J)  
8 Round LTC: 1.80 (J)  
Buttress: 1.80 (J)  
Premium: 1.80 (J)  
Body yield: 1.80 (B)

Non-directional string.

Tension is based on buoyed weight.  
Neutral point: 8,559 ft

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	10000	5.5	17.00	N-80	LT&C	10000	10000	4.767	344.6

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	4935	6290	1.275	4705	7740	1.65	146	348	2.39 J

Prepared by: Dominic Spencer  
Bill Barrett

Phone: (303) 312-8143  
FAX: (303) 312-8195

Date: August 1, 2003  
Denver, Colorado

**Remarks:**

Collapse is based on a vertical depth of 10000 ft, a mud weight of 9.5 ppg. The casing is considered to be evacuated for collapse purposes.  
Collapse strength is based on the Westcott, Dunlop & Kemler method of lateral correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	West Tavaputs General
Operator:	Bill Barrett
String type:	Production
Location:	Carbon County, Utah

<b>Design parameters:</b>	<b>Minimum design factors:</b>	<b>Environment:</b>
<u>Collapse</u>	<u>Collapse:</u>	H2S considered? No
Mud weight: 9.50 ppg	Design factor 1.125	Surface temperature: 75.00 °F
		Bottom hole temperature: 189 °F
		Temperature gradient: 1.40 °F/100ft
		Minimum section length: 1,500 ft

Design is based on evacuated pipe.

	<b>Burst:</b>	
	Design factor 1.00	Cement top: 2,500 ft

Burst  
 Max anticipated surface pressure: 2,226 psi  
 Internal gradient: 0.22 psi/ft  
 Calculated BHP: 4,016 psi

No backup mud specified.

Tension:  
 8 Round STC: 1.80 (J)  
 8 Round LTC: 1.80 (J)  
 Buttress: 1.60 (J)  
 Premium: 1.50 (J)  
 Body yield: 1.50 (B)

Directional info - Build & Drop:  
 Kick-off point: 1000 ft  
 Departure at shoe: 2165 ft  
 Maximum dogleg: 1 °/100ft  
 Inclination at shoe: 0 °

Tension is based on buoyed weight.  
 Neutral point: 7,560 ft

Run Seq	Segment Length (ft)	Nominal Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert. Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	8730	5.5	20.00	P-110	LT&C	8138	8730	4.653	353.3
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	4016	11100	2.764	4016	12630	3.14	139	548	3.93 J

Prepared Dominic Spencer  
 by: Bill Barrett Corporation

Phone: (303) 312-8143  
 FAX: (303) 312-8195

Date: August 25, 2004  
 Denver, Colorado

Remarks:  
 Collapse is based on a vertical depth of 8138 ft, a mud weight of 9.5 ppg. The casing is considered to be evacuated for collapse purposes.  
 Collapse strength is based on the Westcott, Dunlop & Kamler method of biaxial correction for tension.

Burst strength is not adjusted for tension.  
 Collapse strength is (biaxially) derated for doglegs in directional wells by multiplying the tensile stress by the cross section area to calculate a tensile load which is added to the axial load.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	<b>West Tavaputs General</b>
Operator:	<b>Bill Barrett Corporation</b>
String type:	<b>Production</b>

**Design parameters:**

Collapse  
Mud weight: 9.50 ppg

Design is based on evacuated pipe.

Burst  
Max anticipated surface pressure:

2,735 psi  
Internal gradient: 0.22 psi/ft  
Calculated BHP: 4,935 psi

No backup mud specified.

**Minimum design factors:**

Collapse:  
Design factor: 1.125

Burst:  
Design factor: 1.00

Tension:  
8 Round STC: 1.80 (J)  
8 Round LTC: 1.80 (J)  
Buttress: 1.80 (J)  
Premium: 1.80 (J)  
Body yield: 1.80 (B)

Tension is based on buoyed weight.  
Neutral point: 8,580 ft

**Environment:**

H2S considered? No  
Surface temperature: 60.00 °F

Bottom hole temperature: 200 °F  
Temperature gradient: 1.40 °F/100ft  
Minimum section length: 1,500 ft  
Cement top: 2,500 ft

Non-directional string.

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert. Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	10000	4.5	11.60	I-80	LT&C	10000	10000	3.875	231.8
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	4935	6350	1.287	4935	7780	1.58	100	223	2.24 J

Prepared Dominic Spencer  
by: Bill Barrett

Phone: (303) 312-8143  
FAX: (303) 312-8195

Date: December 13, 2005  
Denver, Colorado

**Remarks:**

Collapse is based on a vertical depth of 10000 ft, a mud weight of 9.5 ppg. The casing is considered to be evacuated for collapse purposes.  
Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

## PRESSURE CONTROL EQUIPMENT – Schematic Attached

**A. Type:** Eleven (11) Inch Double Gate Hydraulic BOP with Eleven (11) Inch Annular Preventer. The blow out preventer will be equipped as follows:

1. One (1) blind ram (above).
2. One (1) pipe ram (below).
3. Drilling spool with two (2) side outlets (choke side 3-inch minimum, kill side 2-inch minimum).
4. 3-inch diameter choke line.
5. Two (2) choke line valves (3-inch minimum).
6. Kill line (2-inch minimum).
7. Two (2) chokes.
8. Two (2) kill line valves, one of which shall be a check valve (2-inch minimum).
9. Upper kelly cock valve with handles available.
10. Safety valve(s) & subs to fit all drill string connections in use.
11. Pressure gauge on choke manifold.
12. Fill-up line above the uppermost preventer.

**B. Pressure Rating:** 3,000 psi

**C. Testing Procedure:**

### Annular Preventer

At a minimum, the Annular Preventer will be pressure tested to 50% of the rated working pressure for a period of ten (10) minutes or until provisions of the test are met, whichever is longer.

At a minimum the above pressure test will be performed:

1. When the annular preventer is initially installed;
2. Whenever any seal subject to test pressure is broken;
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition, the Annular Preventer will be functionally operated at least weekly.

### Blow-Out Preventer

At a minimum, the BOP, choke manifold, and related equipment will be pressure tested to the approved working pressure of the BOP stack (if isolated from the surface casing by a test plug) or to 70% of the internal yield strength of the surface casing (if the BOP is not isolated from the casing by a test plug). Pressure will be

maintained for a period of at least ten (10) minutes or until the requirements of the test are met, whichever is longer.

At a minimum, the above pressure test will be performed:

1. When the BOP is initially installed;
2. Whenever any seal subject to test pressure is broken;
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition the pipe and blind rams will be activated each trip, but not more than once each day. All BOP drills and tests will be recorded in the IADC driller's log.

#### **D. Choke Manifold Equipment:**

All choke lines will be straight lines unless turns use tee blocks or are targeted with running tees, and will be anchored to prevent whip and vibration.

#### **E. Accumulator:**

The accumulator will have sufficient capacity to open the hydraulically-controlled choke line valve (if so equipped), close all rams plus the annular preventer, and retain a minimum of 200 psi above precharge on the closing manifold without the use of closing unit pumps. The fluid reservoir capacity will be double the usable fluid volume of the accumulator system capacity and the fluid level of the reservoir will be maintained at the manufacturer's recommendations.

The BOP system will have two (2) independent power sources to close the preventers. Nitrogen bottles (3 minimum) will be one (1) of these independent power sources and will maintain a charge equal to the manufacturer's specifications.

The accumulator precharge pressure test will be conducted prior to connecting the closing unit to the BOP stack and at least once every six (6) months thereafter. The accumulator pressure will be corrected if the measured precharge pressure is found to be above or below the maximum or minimum limits specified in the *Onshore Oil & Gas Order Number 2*.

A manual locking device (i.e. hand wheels) or automatic locking device will be installed on all systems of 2M or greater. A valve will be installed in the closing line as close as possible to the annular preventer to act as a locking device. This valve will be maintained in the open position and will be closed only when the power source for the accumulator is inoperative.


Remote controls shall be readily accessible to the driller. Remote controls for all 3M or greater systems will be capable of closing all preventers. Remote controls for 5M or greater systems will be capable of both opening and closing all preventers. Master controls will be at the accumulator and will be capable of opening and closing all preventers and the choke line valve (if so equipped).

**F. Miscellaneous Information:**

The Blow-Out Preventer and related pressure control equipment will be installed, tested and maintained in compliance with the specifications in and requirements of *Onshore Oil & Gas Order Number 2*. The choke manifold will be located outside the rig sub-structure. The hydraulic BOP closing unit will be located at least twenty-five (25) feet from the well head but readily accessible to the driller. Exact locations and configurations of the hydraulic BOP closing unit will depend upon the particular rig contracted to drill this hole.


A flare line will be installed after the choke manifold, extending 125 feet (minimum) from the center of the drill hole to a separate flare pit.

**BILL BARRETT CORPORATION**  
**TYPICAL 3,000 p.s.i. BLOWOUT PREVENTER**

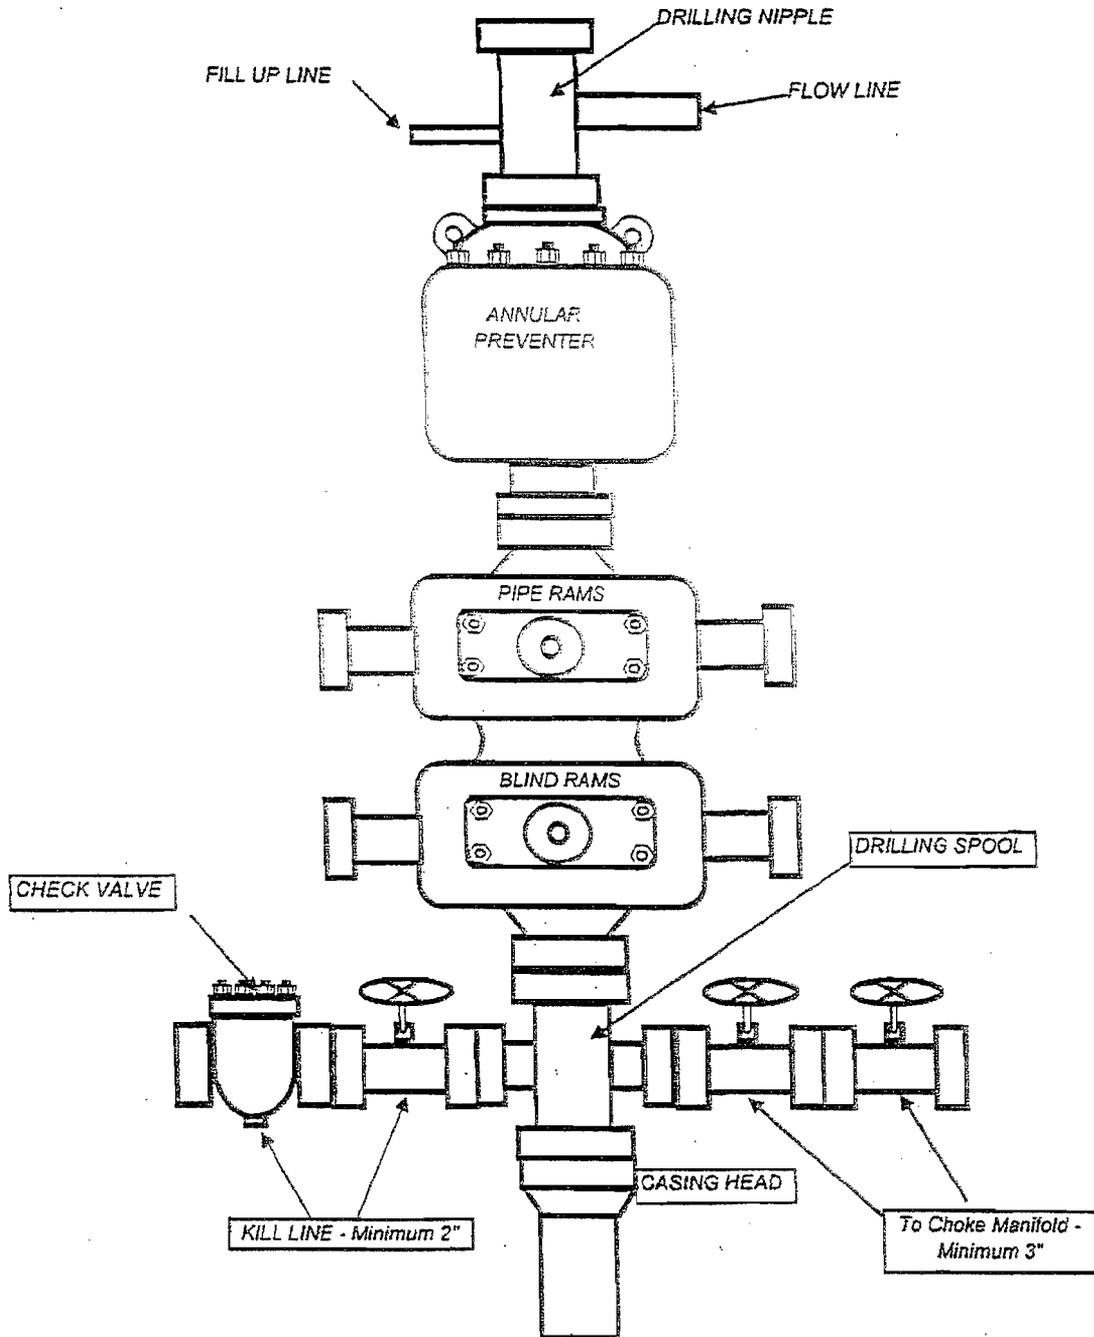

# BILL BARRETT CORPORATION

## TYPICAL 3,000 p.s.i. CHOKE MANIFOLD

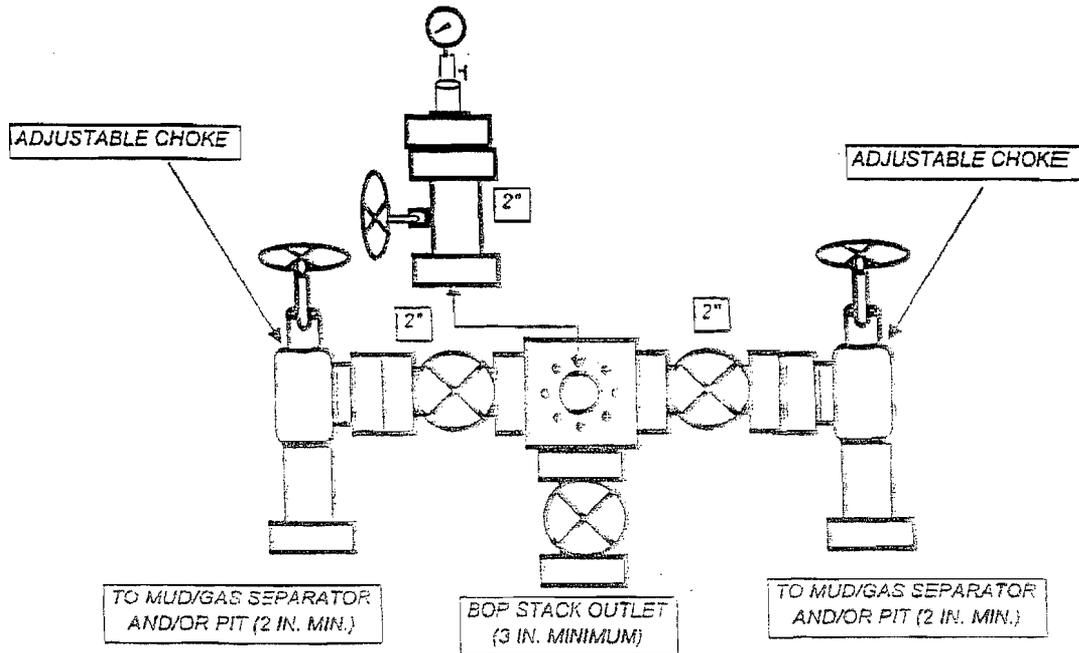



# Bill Barrett Corporation

## NINE MILE CEMENT VOLUMES

Well Name: Peter's Point 16-27-12-16

### Surface Hole Data:

Total Depth:	1,000'
Top of Cement:	0'
OD of Hole:	12.250"
OD of Casing:	9.625"

### Calculated Data:

Lead Volume:	219.2	ft <sup>3</sup>
Lead Fill:	700'	
Tail Volume:	94.0	ft <sup>3</sup>
Tail Fill:	300'	

### Cement Data:

Lead Yield:	1.85	ft <sup>3</sup> /sk
Tail Yield:	1.16	ft <sup>3</sup> /sk
% Excess:	100%	

### Calculated # of Sacks:

# SK's Lead:	240
# SK's Tail:	170

### Production Hole Data:

Total Depth:	7,700'
Top of Cement:	900'
OD of Hole:	8.750"
OD of Casing:	5.500"

### Calculated Data:

Lead Volume:	1717.6	ft <sup>3</sup>
Lead Fill:	6,800'	

### Cement Data:

Lead Yield:	1.49	ft <sup>3</sup> /sk
% Excess:	30%	

### Calculated # of Sacks:

# SK's Lead:	1500
--------------	------

**Peter's Point 16-27-12-16 Proposed Cementing Program**

<u>Job Recommendation</u>	<u>Surface Casing</u>
<b>Lead Cement - (700' - 0')</b>	
Halliburton Light Premium	Fluid Weight: 12.7 lbm/gal
2.0% Calcium Chloride	Slurry Yield: 1.85 ft <sup>3</sup> /sk
0.125 lbm/sk Ploy-E-Flake	Total Mixing Fluid: 9.9 Gal/sk
	Top of Fluid: 0'
	Calculated Fill: 700'
	Volume: 78.09 bbl
	<b>Proposed Sacks: 240 sks</b>
<b>Tail Cement - (1000' - 700')</b>	
Premium Cement	Fluid Weight: 15.8 lbm/gal
94 lbm/sk Premium Cement	Slurry Yield: 1.16 ft <sup>3</sup> /sk
2.0% Calcium Chloride	Total Mixing Fluid: 4.97 Gal/sk
0.125 lbm/sk Ploy-E-Flake	Top of Fluid: 700'
	Calculated Fill: 300'
	Volume: 33.47 bbl
	<b>Proposed Sacks: 170 sks</b>

<u>Job Recommendation</u>	<u>Production Casing</u>
<b>Lead Cement - (7700' - 900')</b>	
50/50 Poz Premium	Fluid Weight: 13.4 lbm/gal
3.0 % KCL	Slurry Yield: 1.49 ft <sup>3</sup> /sk
0.75% Halad®-322	Total Mixing Fluid: 7.06 Gal/sk
3.0 lbm/sk Silicalite Compacted	Top of Fluid: 900'
0.2% FWCA	Calculated Fill: 6,800'
0.125 lbm/sk Poly-E-Flake	Volume: 397.67 bbl
1.0 lbm/sk Granulite TR 1/4	<b>Proposed Sacks: 1500 sks</b>

## SURFACE USE PLAN

BILL BARRETT CORPORATION  
*Peter's Point Unit Federal #16-27-12-16*  
SESE, 1037' FSL, 802' FEL, Section 27, T12S-R16E  
Carbon County, Utah

---

The onsite for this location was conducted on 7/23/2007

This is a vertical well to be drilled off this two well pad (one vertical, one directional).

The dirt contractor will be provided with an approved copy of the surface use plan of operations before initiating construction.

1. Existing Roads:
  - a. The proposed well site is located approximately 50 miles from Myton, Utah. Maps reflecting directions to the proposed well site are included (see Topographic maps A and B).
  - b. The use of roads under State and County Road Department maintenance is necessary to access the Peter's Point Unit. However, an encroachment permit is not anticipated since no upgrades to the State or County road systems are proposed at this time.
  - c. All existing roads will be maintained and kept in good repair during all phases of operation.
  - d. Vehicle operators will obey posted speed restrictions and observe safe speeds commensurate with road and weather conditions.
  - e. Since no improvements are anticipated to the State, County or BLM access roads, no topsoil stripping will occur.
  - f. An off-lease federal right-of-way for the access road and utility corridor is not anticipated at this time since existing roads are being utilized into the Peter's Point Unit area. All new construction will be within the Unit.
2. Planned Access Road:
  - a. From the existing Peter's Point road, an access of approximately 0.1 miles (528') is proposed (see Topographic map B). A road design plan is not anticipated at this time.
  - b. The new access road will consist of an 18' travel surface within a 32' temporary disturbance area. The proposed access has been placed to minimize impact to the environment and natural drainage of the area.
  - c. BLM approval to construct this new access road is requested with this application.
  - d. A maximum grade of 10% will be maintained throughout the project with minimum cuts and fills, as necessary, to access the well.

- e. The access road will be constructed using standard equipment and techniques. Bulldozers and/or road graders would first clear vegetation and topsoil from the ROW. These materials may be windrowed for future redistribution during the reclamation process. The surface would be crowned to facilitate drainage to a borrow ditch on each side of the road designed to minimize erosion potential. Following completion of the wells on the pad, graveling or capping the roadbed would be performed as necessary to provide a well constructed, safe road.
- f. Following completion of all wells planned on the pad, the road will be reduced to an 18-foot wide running surface and reclaimed according to the specifications of the appropriate agency or private land owner.
- g. A turnout is not proposed.
- h. 18" diameter culverts will be installed as necessary. Adequate drainage structures, where necessary, will be incorporated into the remainder of the road.
- i. No surfacing material will come from Indian lands or off-lease Federal lands. BBC requests that any excess rock from construction of the pad be used for surfacing of the access road, if necessary. Any additional materials needs may come from either existing SITLA Materials Permits (364, 395, or 386) or from federal wells within the Peter's Point Unit.
- j. No gates or cattle guards are anticipated at this time.
- k. Surface disturbance and vehicular travel will be limited to the approved location access road. Adequate signs will be posted, as necessary, to warn the public of project related traffic.
- l. All access roads and surface disturbing activities will conform to the appropriate standard, no higher than necessary, to accommodate their intended function adequately as outlined in the Bureau of Land Management and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development, Fourth Edition – 2006.
- m. The operator will be responsible for all maintenance of the access road including drainage structures. It is BBC's intent to maintain the newly constructed access road to this wellsite.

3. Location of Existing Wells:

- a. Following is a list of wells with surface hole locations within a one-mile radius of the proposed well:
  - i. water wells none
  - ii. injection wells none
  - iii. disposal wells none
  - iv. drilling wells one
  - v. temp shut-in wells none
  - vi. producing wells one
  - vii. abandoned wells none
  - viii. drilled, waiting on completion one

- b. Topographic Map C may not include all wells noted in a. above if new wells have been drilled since the date of the plat. An additional map has been included indicating current information.

4. Location of Production Facilities:

- a. Some permanent structures/facilities will be shared between this proposed well and the additional well to be drilled from this pad. Each well will have its own meter run and separator. Pending the evaluation of completion operations, additional water and/or oil tanks may be added if necessary.
- b. All permanent above-ground structures will be painted a flat, non-reflective Olive Black to match the standard environmental colors. All facilities will be painted the designated color at the time of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) may be excluded.
- c. Site security guidelines identified in 43 CFR 3162.7-5 and Onshore Oil and Gas Order No. 3 will be adhered to.
- d. A gas meter run will be constructed and located on lease within 500 feet of the wellhead. Meter runs will be housed and/or fenced. All gas production and measurement shall comply with the provisions of 43 CFR 3162.7-3, Onshore Oil and Gas Order No. 5, and American Gas Association (AGA) Report No. 3. Use of an electronic flow meter (EFM) for gas measurement purposes is requested with this application. In addition, the use of flow conditioners is requested (versus straightening vanes).
- e. A tank battery(s) will be constructed on this lease; it will be surrounded by a dike sufficient to contain the storage capacity of 1.5 times the single largest tank inside the berm. All loading lines and valves will be placed inside the berm surrounding the tank battery or will have a secondary containment vessel. All liquid hydrocarbon production and measurement shall conform to the provisions of 43 CFR 3162.7-2 and Onshore Oil and Gas Order No. 4 for the measurement of oil. BBC requests permission to install the necessary production/operation facilities with this application.
- f. Any necessary pits will be properly fenced to prevent any wildlife and livestock entry.
- g. All access roads will be maintained as necessary to prevent erosion and accommodate year-round traffic as practicable. The roads will be maintained in a safe, useable condition.
- h. The site will require periodic maintenance to ensure that drainages are kept open and free of debris, ice and snow, and that surfaces are properly treated to reduce erosion, fugitive dust, and impacts to adjacent areas.
- i. A gas pipeline (approximately 659' of up to 10" pipe) is associated with this application and is being applied for at this time. The proposed gas pipeline will leave the west end of the well pad, turn due south and will tie in to an existing surface-laid 12" pipeline.
- j. The proposed steel gas pipeline will be buried, where soil conditions permit, within a 20' utility corridor immediately adjacent to the 32' disturbed area for the new access road road (see Topographic Map D).

- k. As referred to in I. above, the line will not be buried in areas with bedrock at or near surface that would require blasting to loosen rock before excavation for burial of the pipeline. A table of the actual pipeline corridor width required is noted below for the different scenarios. **BBC is requesting a 20' utility corridor but actual disturbance will be based on the applicable scenario.**

Surface-Laid:	20' utility corridor + 32' road corridor = 52' TOTAL
	Estimated disturbance for utility to be minimal, if any, within the 20' requested. Total disturbance would be 32'.
Buried:	20' utility corridor + 32' road corridor = 52' TOTAL
	Estimated disturbance for utility to include all 20' requested. Total disturbance would be 52'.

- l. The determination to bury or surface lay the pipeline will be made by the Authorized Officer at the time of construction.
- k. BBC intends on stringing the pipeline on the surface, welding many joints into long lengths, dragging the long lengths into position and then completing a final welding pass to join the long lengths together. The welded joints will either remain on the surface or will be placed within the trench, depending on the scenario. BBC intends on connecting the pipeline together utilizing conventional welding technology.
5. Location and Type of Water Supply:
- a. Bill Barrett Corporation will use water consistent with approvals granted by the Utah State Engineer's Office under Application Number 90-1846 (T76109) which expires March 27, 2008.
- b. Water use for this location will most likely be diverted from Nine Mile Creek, the S¼ of Section 8, T12S-R16E or from a water well located in the N¼ of State Section 32-T12S-R16E. For either of these sources, bobtail trucks would haul the water, traveling Cottonwood Canyon dugway to Peter's Point road.
6. Source of Construction Material:
- a. The use of materials will conform to 43 CFR 3610.2-3.
- b. No construction materials will be taken out of the Peter's Point Unit.
- c. If any additional gravel is required, it will be obtained from a SITLA materials permit or will be taken from federal BBC locations within the Peter's Point unit.
7. Methods of Handling Waste Disposal:
- a. All wastes associated with this application will be contained and disposed of utilizing approved facilities.
- b. Drill cuttings will be contained and buried on site.
- c. The reserve pit will be located outboard of the location along the south side of the pad.

- d. The reserve pit will be constructed so as not to leak, break or allow any discharge.
- e. If necessary, the reserve pit will be lined with 12 mil minimum thickness plastic nylon reinforced liner material. The liner will overlay a felt-liner pad only if rock is encountered during excavation. The pit liner will overlap the pit walls and be anchored with dirt and/or rocks to hold it in place. No trash, scrap pipe, etc., that could puncture the liner will be disposed of in the pit. Pit walls will be sloped no greater than 2:1. A minimum 2-foot freeboard will be maintained in the pit at all times during the drilling and completion operations.
- f. The reserve pit has been located in cut material. Three sides of the reserve pit will be fenced before drilling starts. The fourth side will be fenced as soon as drilling is completed and shall remain until the pit is dry. After the reserve pit has dried, all areas not needed for production will be rehabilitated.
- g. No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported or disposed of annually in association with the drilling, testing or completion of the well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities will be used, produced, stored, transported or disposed of in association with the drilling, testing or completion of the well.
- h. Trash will be contained in a trash cage or roll-off container and hauled away to an approved disposal site as necessary but no later than at the completion of drilling operations. The contents of the trash container will be hauled off periodically to the approved Carbon or Uintah County Landfill.
- i. Produced fluids from the well other than water will be produced into a test tank until such time as construction of production facilities is completed. Any spills of oil, gas, salt water or other produced fluids will be cleaned up and removed.
- j. After initial clean-up and based on volumes, BBC will install a tank (maximum size 400 barrel capacity) to contain produced waste water. After first production, produced wastewater will be confined to a lined pit or storage tank for a period not to exceed ninety (90) days. Thereafter, produced water will be used in further drilling and completion activities, evaporated in the pit, or hauled to R & I Disposal, a State approved disposal facility.
- k. Any salts and/or chemicals, which are an integral part of the drilling system, will be disposed of in the same manner as the drilling fluid.
- l. Sanitary facilities will be on site at all times during operations. Sewage will be placed in a portable chemical toilet and the toilet replaced periodically utilizing a licensed contractor to transport by truck the portable chemical toilet so that its contents can be delivered to the Price or Vernal Wastewater Treatment Facility in accordance with state and county regulations.
- m. Any liquid hydrocarbons produced during completion work will be contained in test tanks on the well location. The tanks will be removed from location at a later date.

- n. A flare pit may be constructed a minimum of 110' from the wellhead and may be used during completion work. In the event a flare pit proves to be unworkable in this situation, a flare stack will be installed. BBC will flow back as much fluid and gas as possible into pressurized vessels, separating the fluid from the gas. The fluid will then be either returned to the reserve pit or placed into a tank. Gas will be then directed into the flare pit or the flare stack and a constant source of ignition will be on site. This should eliminate any fires in and around the reserve pit. Natural gas will be directed to the pipeline as soon as pipeline gas quality standards are met. By eliminating condensate on the reserve pit and discharge of gas within the reserve pit, potential for damage to the pit liner will be minimized.
  - o. Any hydrocarbons floating on the surface of the reserve pit will be removed as soon as possible after drilling and completion operations are finished.
  - p. If hydrocarbons are present on the reserve pit and are not removed shortly after drilling or completion operations cease, the reserve pit will be flagged overhead or covered with wire or plastic mesh to protect migrating birds.
8. Ancillary Facilities:
- a. Garbage containers and portable toilets are the only ancillary facilities proposed in this application
9. Well Site Layout:
- a. The well will be properly identified in accordance with 43 CFR 3162.6.
  - b. The rig layout and cross section diagrams are enclosed (see Location Layout and Cross Section plats).
  - c. The pad and road designs are consistent with BLM specifications.
  - d. The pad has been staked at its maximum size of 391' x 170' with a reserve pit size of 200' x 100'.
  - e. All surface disturbing activities will be supervised by a qualified, responsible company representative who is aware of the terms and conditions of the APD and specifications in the approved plans.
  - f. All cut and fill slopes will be such that stability can be maintained for the life of the activity.
  - g. Diversion ditches will be constructed, if necessary, around the well site to prevent surface waters from entering the well site area.
  - h. The stockpiled topsoil (first 6 inches or maximum available) will be stored in a windrow on the uphill side of the location to prevent any possible contamination. All topsoil will be stockpiled for reclamation in such a way as to prevent soil loss and contamination.
  - i. Pits will remain fenced until site cleanup.

- j. If air drilling occurs, the blooie line will be located at least 100 feet from the well head and will run from the wellhead directly to the pit.
- k. Water application may be implemented if necessary to minimize the amount of fugitive dust.

10. Plan for Restoration of the Surface:

- a. Site reclamation for a producing well(s) will be accomplished for portions of the site not required for the continued operation of the well(s) on this pad.
- b. The operator will control noxious weeds along access road use authorizations, pipeline route authorizations, well sites or other applicable facilities by spraying or mechanical removal. A list of noxious weeds may be obtained from the BLM or the appropriate county extension office. On BLM administered land it is required that a Pesticide Use Proposal be submitted and approved prior to the application of herbicides, pesticides or possibly hazardous chemicals.
- c. Upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1. The reserve pit will be allowed to dry prior to the commencement of backfilling work. No attempts will be made to backfill the reserve pit until the pit is free of standing water. Once the reserve pit is dry, the plastic nylon reinforced liner shall be torn and perforated before backfilling of the reserve pit. Rat and mouse holes will be filled and compacted from bottom to top immediately upon release of the drilling rig from location.
- d. The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. Areas not used for production purposes will be backfilled and blended into the surrounding terrain, reseeded and erosion control measures installed. Erosion control measures will be adhered to after slope reduction. Mulching, erosion control measures and fertilization may be required to achieve acceptable stabilization. Back slopes and fore slopes will be reduced as practical and scarified with the contour. The reserved topsoil will be evenly distributed over the slopes and scarified along the contour. Slopes will be seeded with the BLM specified seed mix. Reclamation operations for the well pad are expected to require one week and will begin when the fluids in the reserve pit have evaporated. Seeding will take place either during the fall (prior to ground frost) or spring (after frost leaves the ground) months. Restoration of un-needed portions of the pad will commence as soon as practical after the installation of production facilities.
- e. The cut and fill slopes and all other disturbed areas not needed for the production operation will be top-soiled and revegetated. Prior to reseeding, all disturbed areas will be scarified and left with a rough surface. The site will then be seeded and/or planted as prescribed by the BLM. The BLM recommended seed mix will be detailed within their approval documents. Topsoil salvaged from the drill site and stored for more than one year will be placed at the location indicated on the well site layout drawing and graded to a depth optimum to maintain topsoil viability, seeded with the BLM prescribed seed mixture and covered with mulch for protection from wind and water erosion and to discourage the invasion of weeds.

- f. Salvaged topsoil from the road (if any) and the drill site will be evenly re-spread over cut and fill surfaces not actively used during the production phase. Upon final reclamation at the end of the project life, topsoil spread on these surfaces will be used for the overall reclamation effort.

11. Surface and Mineral Ownership:

- a. Surface ownership – Federal under the management of the Bureau of Land Management – Price Field Office, 125 South 600 West, Price Utah 84078; (435) 636-3600.
- b. Mineral ownership – Federal under the management of the Bureau of Land Management – Price Field Office, 125 South 600 West, Price Utah 84078; (435) 636-3600.

12. Other Information:

- a. Montgomery Archaeological Consultants has conducted a Class III archeological survey. A copy of the report has been submitted under separate cover to the appropriate agencies by Montgomery as MOAC Report No. 07-251, dated July 16,2007.
- b. BBC will identify areas in our drilling program where fluids escaping the wellbore and exiting onto a hillside might occur. In those cases, BBC will be ready with cement and/or fluid loss compounds (types of lost circulation fluids) to heal up vags and cracks. Upon individual evaluation of the proposed well sites. BBC may air drill the hole to surface casing depth if necessary.
- c. A combustor may be installed at this location for control of associated condensate tank emissions. A combustor ranges from 24” to 48” wide and is approximately 10’ tall. Combustor placement would be on existing disturbance and would not be closer than 100’ to any tank or wellhead.

OPERATOR CERTIFICATION

Certification:

I hereby certify that I, or someone under my direction supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filings of false statements.

Executed this 26<sup>th</sup> day of July 2007  
Name: Tracey Fallang  
Position Title: Regulatory Analyst  
Address: 1099 18<sup>th</sup> Street, Suite 2300, Denver, CO 80202  
Telephone: 303-312-8134  
Field Representative Fred Goodrich  
Address: 1820 W. Hwy 40, Roosevelt, UT 84066  
Telephone: 435-725-3515  
E-mail: \_\_\_\_\_

Tracey Fallang  
Tracey Fallang, Environmental/Regulatory Analyst

# BILL BARRETT CORPORATION

PETERS POINT UNIT FEDERAL #16-27-12-16 & #10-27D-12-16  
 LOCATED IN CARBON COUNTY, UTAH  
 SECTION 27, T12S, R16E, S.L.B.&M.



PHOTO: VIEW FROM LOCATION STAKES TO CORNER # 7

CAMERA ANGLE: NORTHWESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHERLY




**U E L S** Uintah Engineering & Land Surveying  
 85 South 200 East Vernal, Utah 84078  
 435-789-1017 uels@uelsinc.com

LOCATION PHOTOS			02	03	06	PHOTO
			MONTH	DAY	YEAR	
TAKEN BY: D.R.		DRAWN BY: B.C.		REVISED: 07-26-07		

**BILL BARRETT CORPORATION**

**LOCATION LAYOUT FOR**


**PETERS POINT UNIT FEDERAL**  
 #16-27-12-16 & #10-27D-12-16  
 SECTION 27, T12S, R16E, S.L.B.&M.  
 SE 1/4 SE 1/4

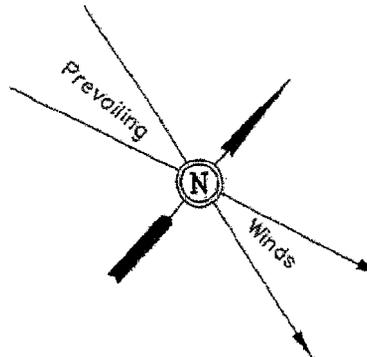

SCALE: 1" = 60'  
 DATE: 02-10-06  
 DRAWN BY: S.L.  
 REVISED: 06-27-07 P.M.

**NOTE:**  
 Flare Pit is to  
 be located a min.  
 of 100' from the  
 Well Head.

57°46'28" N 2683.95'  
 (TO PROPOSED  
 #16-27-12-16)

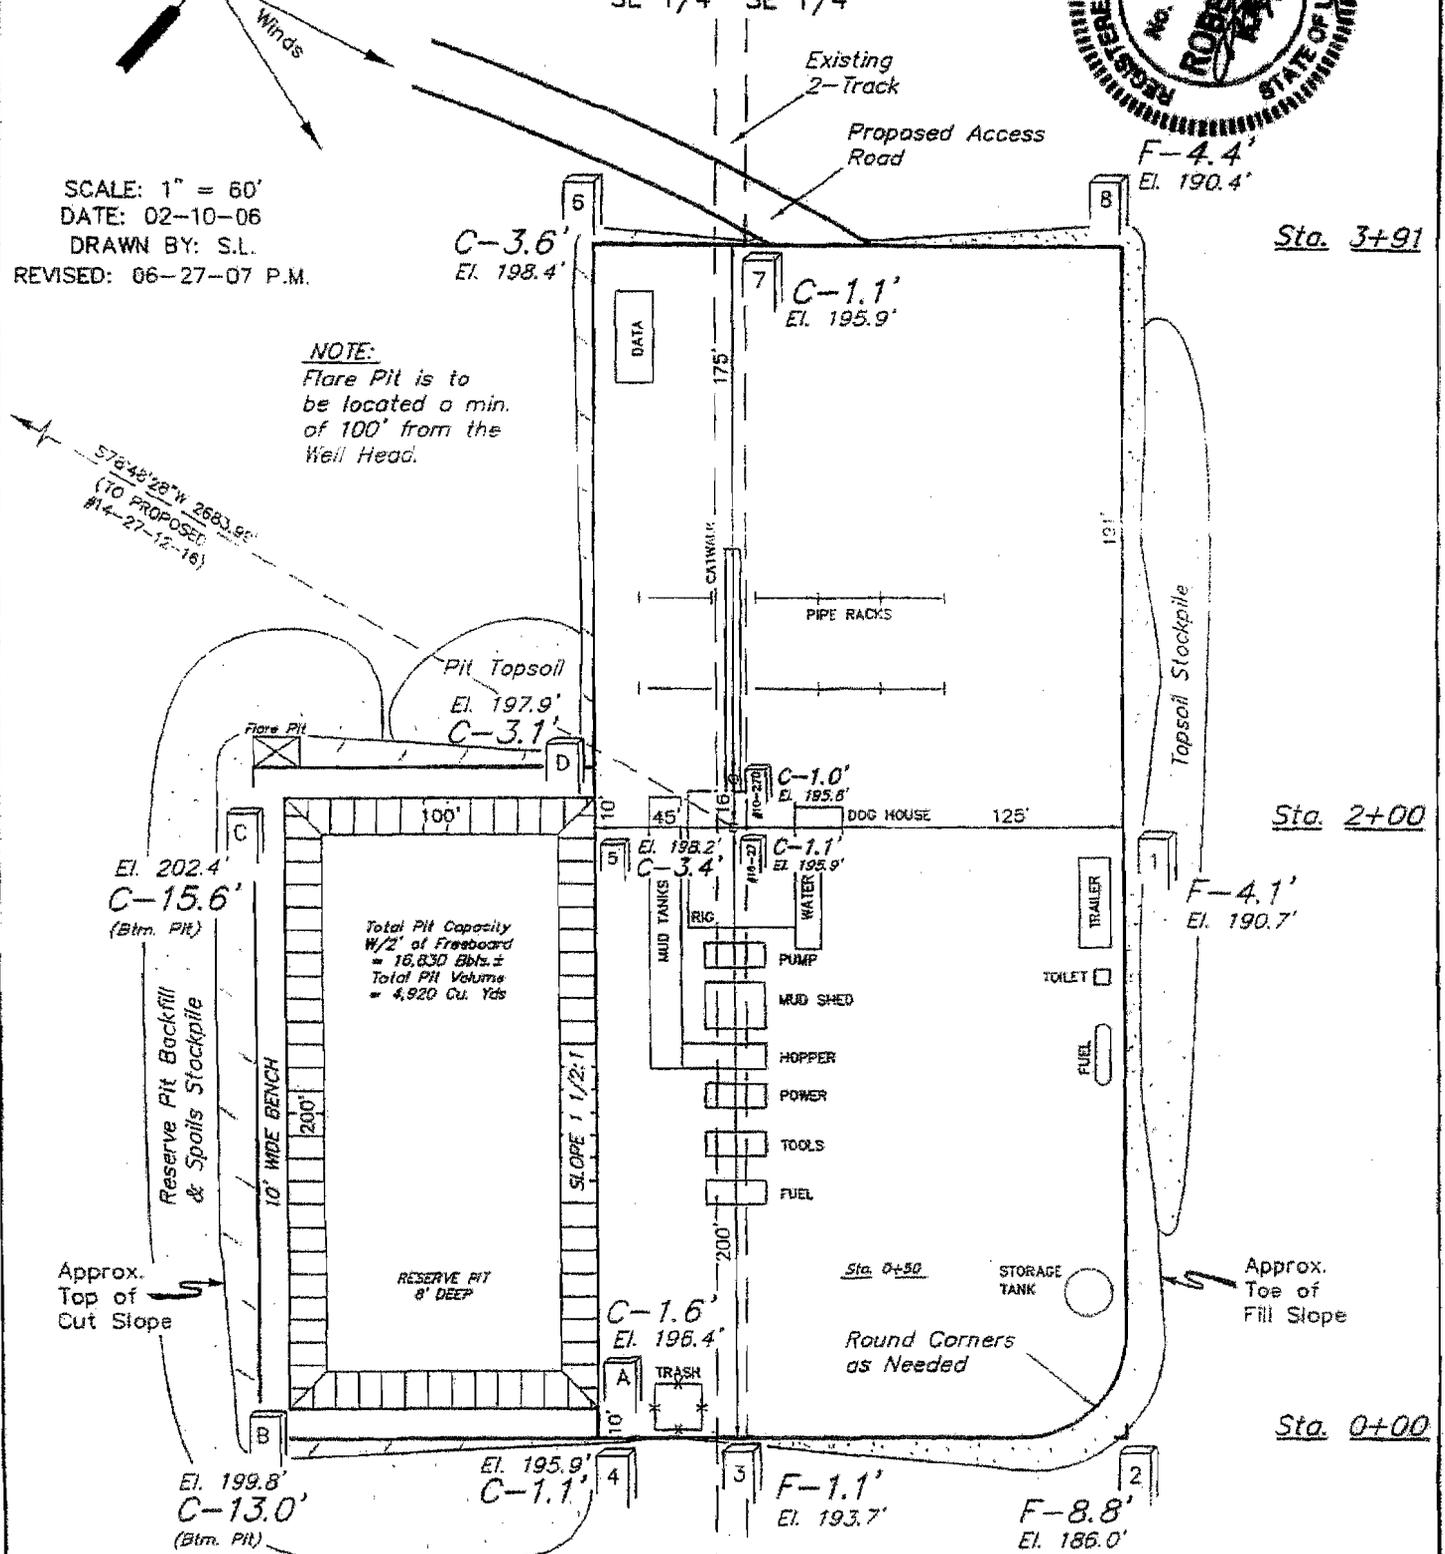

Elev. Ungraded Ground At #16-27 Loc. Stake = 7195.9'  
 FINISHED GRADE ELEV. AT #16-27 LOC. STAKE = 7194.8'

**UINTAH ENGINEERING & LAND SURVEYING**  
 65 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017


**BILL BARRETT CORPORATION**  
**TYPICAL CROSS SECTIONS FOR**

PETERS POINT UNIT FEDERAL  
 #16-27-12-16 & #10-27D-12-16  
 SECTION 27, T12S, R16E, S.L.B.&M.  
 SE 1/4 SE 1/4



1" = 40'  
 X-Section  
 Scale  
 1" = 100'

DATE: 02-10-06  
 DRAWN BY: S.L.  
 REVISED: 06-27-07 P.M.

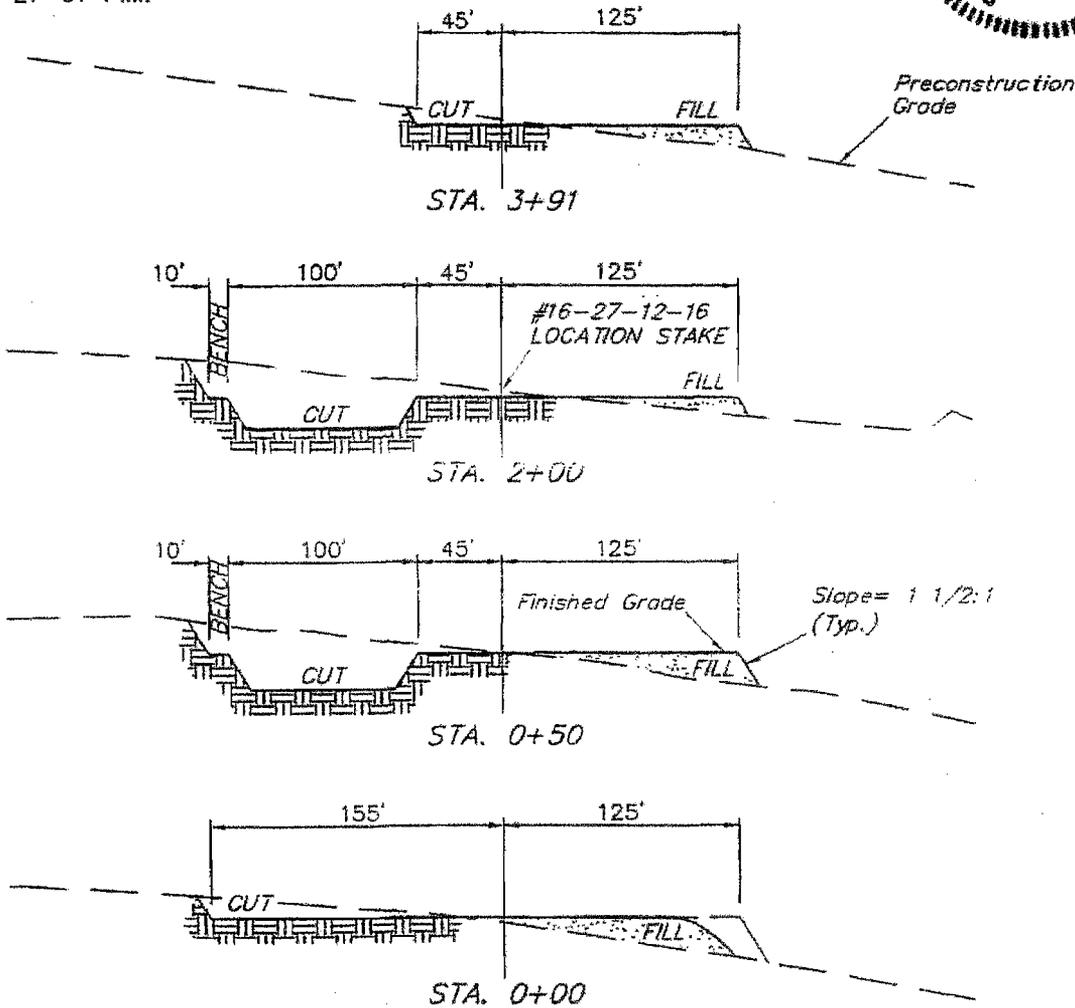

APPROXIMATE ACREAGES

WELL SITE DISTURBANCE = ±2.732 ACRES  
 ACCESS ROAD DISTURBANCE (~~1.552~~ @ 32') = ~~1.552~~ ACRES 0.38 ACRES  
 PIPELINE DISTURBANCE (~~2.040~~ @ 32') = ~~0.640~~ ACRES 0.30 ACRES

TOTAL = ~~4.924~~ ACRES  
 3.112

\* NOTE:  
 FILL QUANTITY INCLUDES  
 5% FOR COMPACTION

NOTE:

Topsoil should not be  
 Stripped Below Finished  
 Grade on Substructure Area.

APPROXIMATE YARDAGES

CUT  
 (5") Topsoil Stripping = 1,920 Cu. Yds.  
 Remaining Location = 10,720 Cu. Yds.  
 TOTAL CUT = 12,640 CU.YDS.  
 FILL = 5,190 CU.YDS.

EXCESS MATERIAL = 7,450 Cu. Yds.  
 Topsoil & Pit Backfill = 4,380 Cu. Yds.  
 (1/2 Pit Vol.)  
 EXCESS UNBALANCE = 3,070 Cu. Yds.  
 (After Interim Rehabilitation)

UINTAH ENGINEERING & LAND SURVEYING  
 85 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017



R 16 E  
R 17 E

PROPOSED LOCATION:  
PETERS POINT UNIT FEDERAL  
#16-27-12-16 & #10-27D-12-16

SEE TOPO "B"

T12S  
T13S

**LEGEND:**

⊗ PROPOSED LOCATION

**BILL BARRETT CORPORATION**

PETERS POINT UNIT FEDERAL  
#16-27-12-16 & #10-27D-12-16  
SECTION 27, T12S, R16E, S.1.B.&M.  
SE 1/4 SE 1/4


**U&L S**  
Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813



TOPOGRAPHIC MAP  
02 03 06  
MONTH DAY YEAR  
SCALE: 1:100,000 DRAWN BY: B.C. REVISED: 07-26-07



R  
16  
E

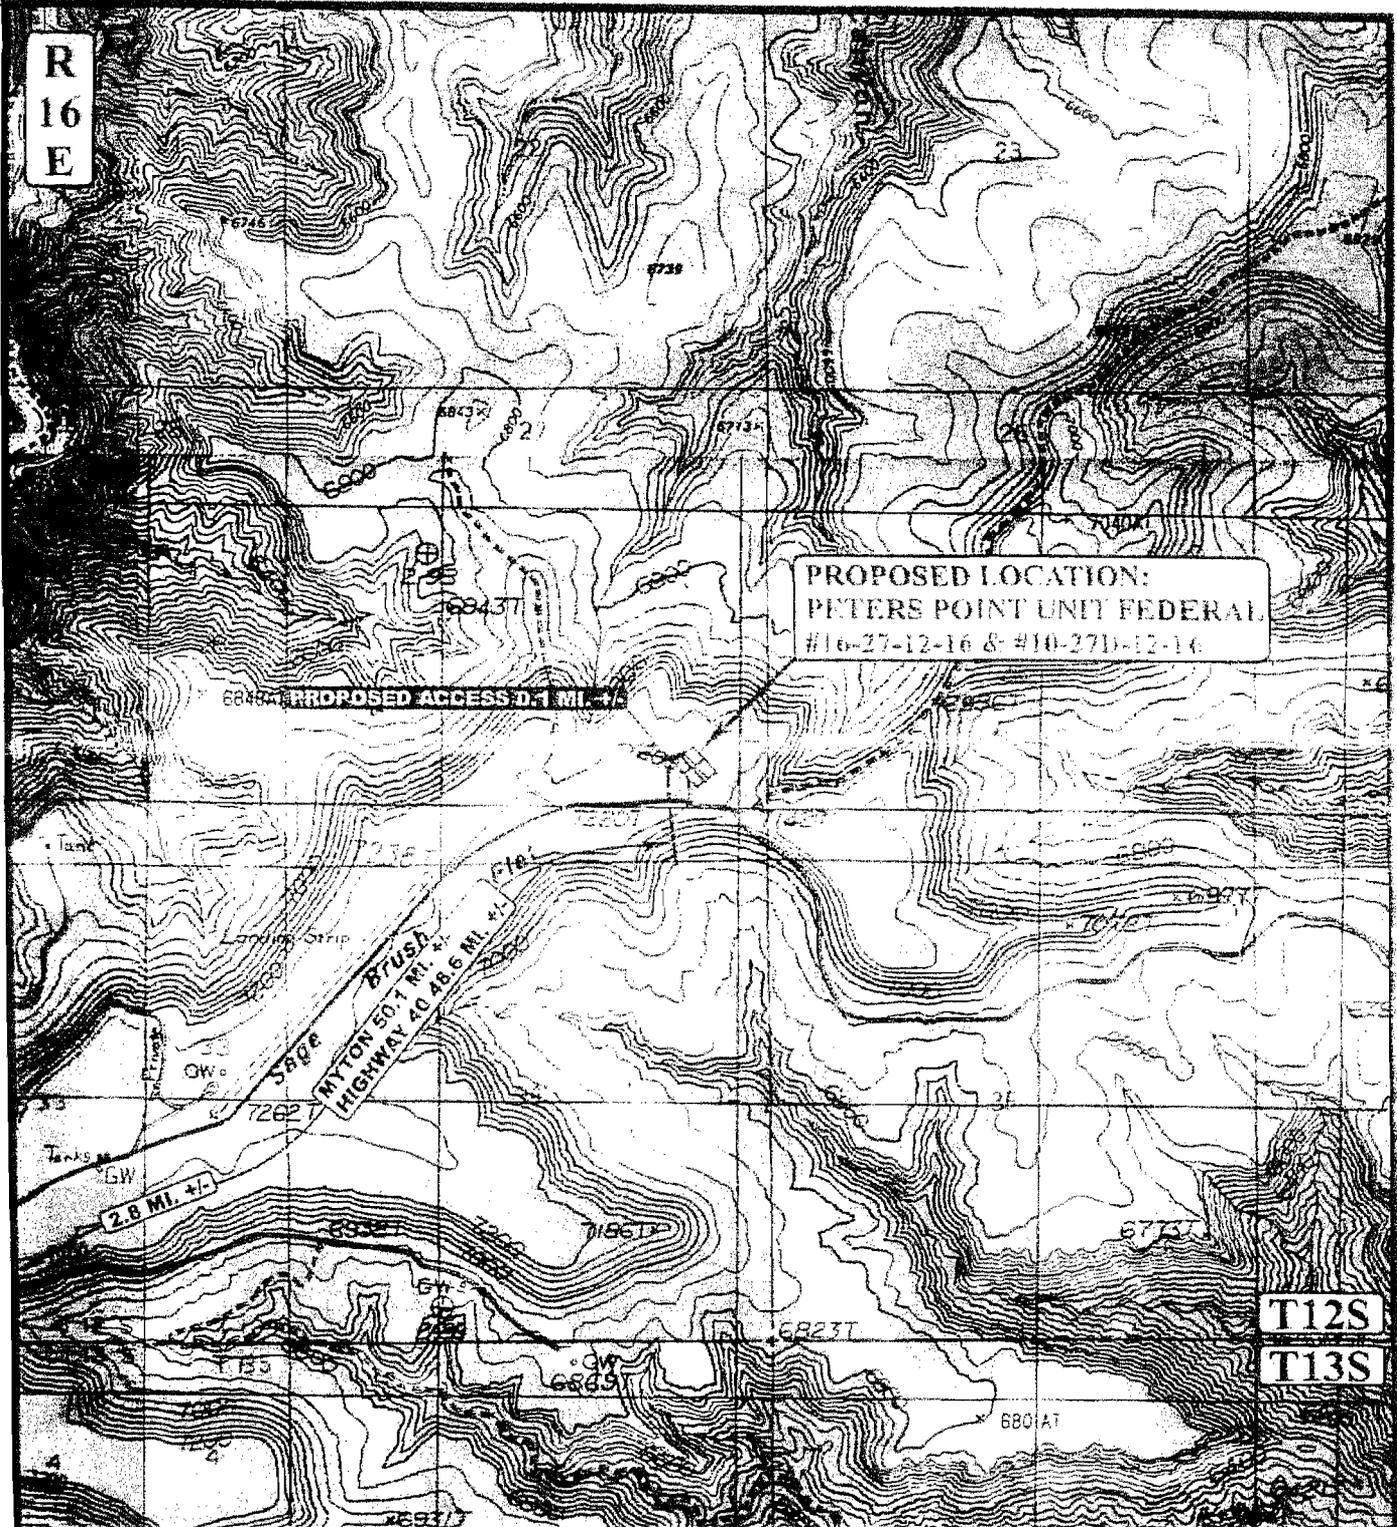

PROPOSED LOCATION:  
 PETERS POINT UNIT FEDERAL  
 #16-27-12-16 & #10-27D-12-16

PROPOSED ACCESS 0.1 MI. +/-

T12S  
 T13S

————— EXISTING ROAD  
 - - - - - PROPOSED ACCESS ROAD

**BILL BARRETT CORPORATION**

PETERS POINT UNIT FEDERAL  
 #16-27-12-16 & #10-27D-12-16  
 SECTION 27, T12S, R16E, S.L.B.&M.  
 SE 1/4 SE 1/4



Utah Engineering & Land Surveying  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813




TOPOGRAPHIC 02 03 06  
 MAP MONTH DAY YEAR  
 SCALE: 1" = 2000' DRAWN BY: B.C. REVISED: 07-26-07



R  
16  
E

**PROPOSED LOCATION:  
PETERS POINT UNIT FEDERAL  
#16-27-12-16 & #10-27D-12-16**

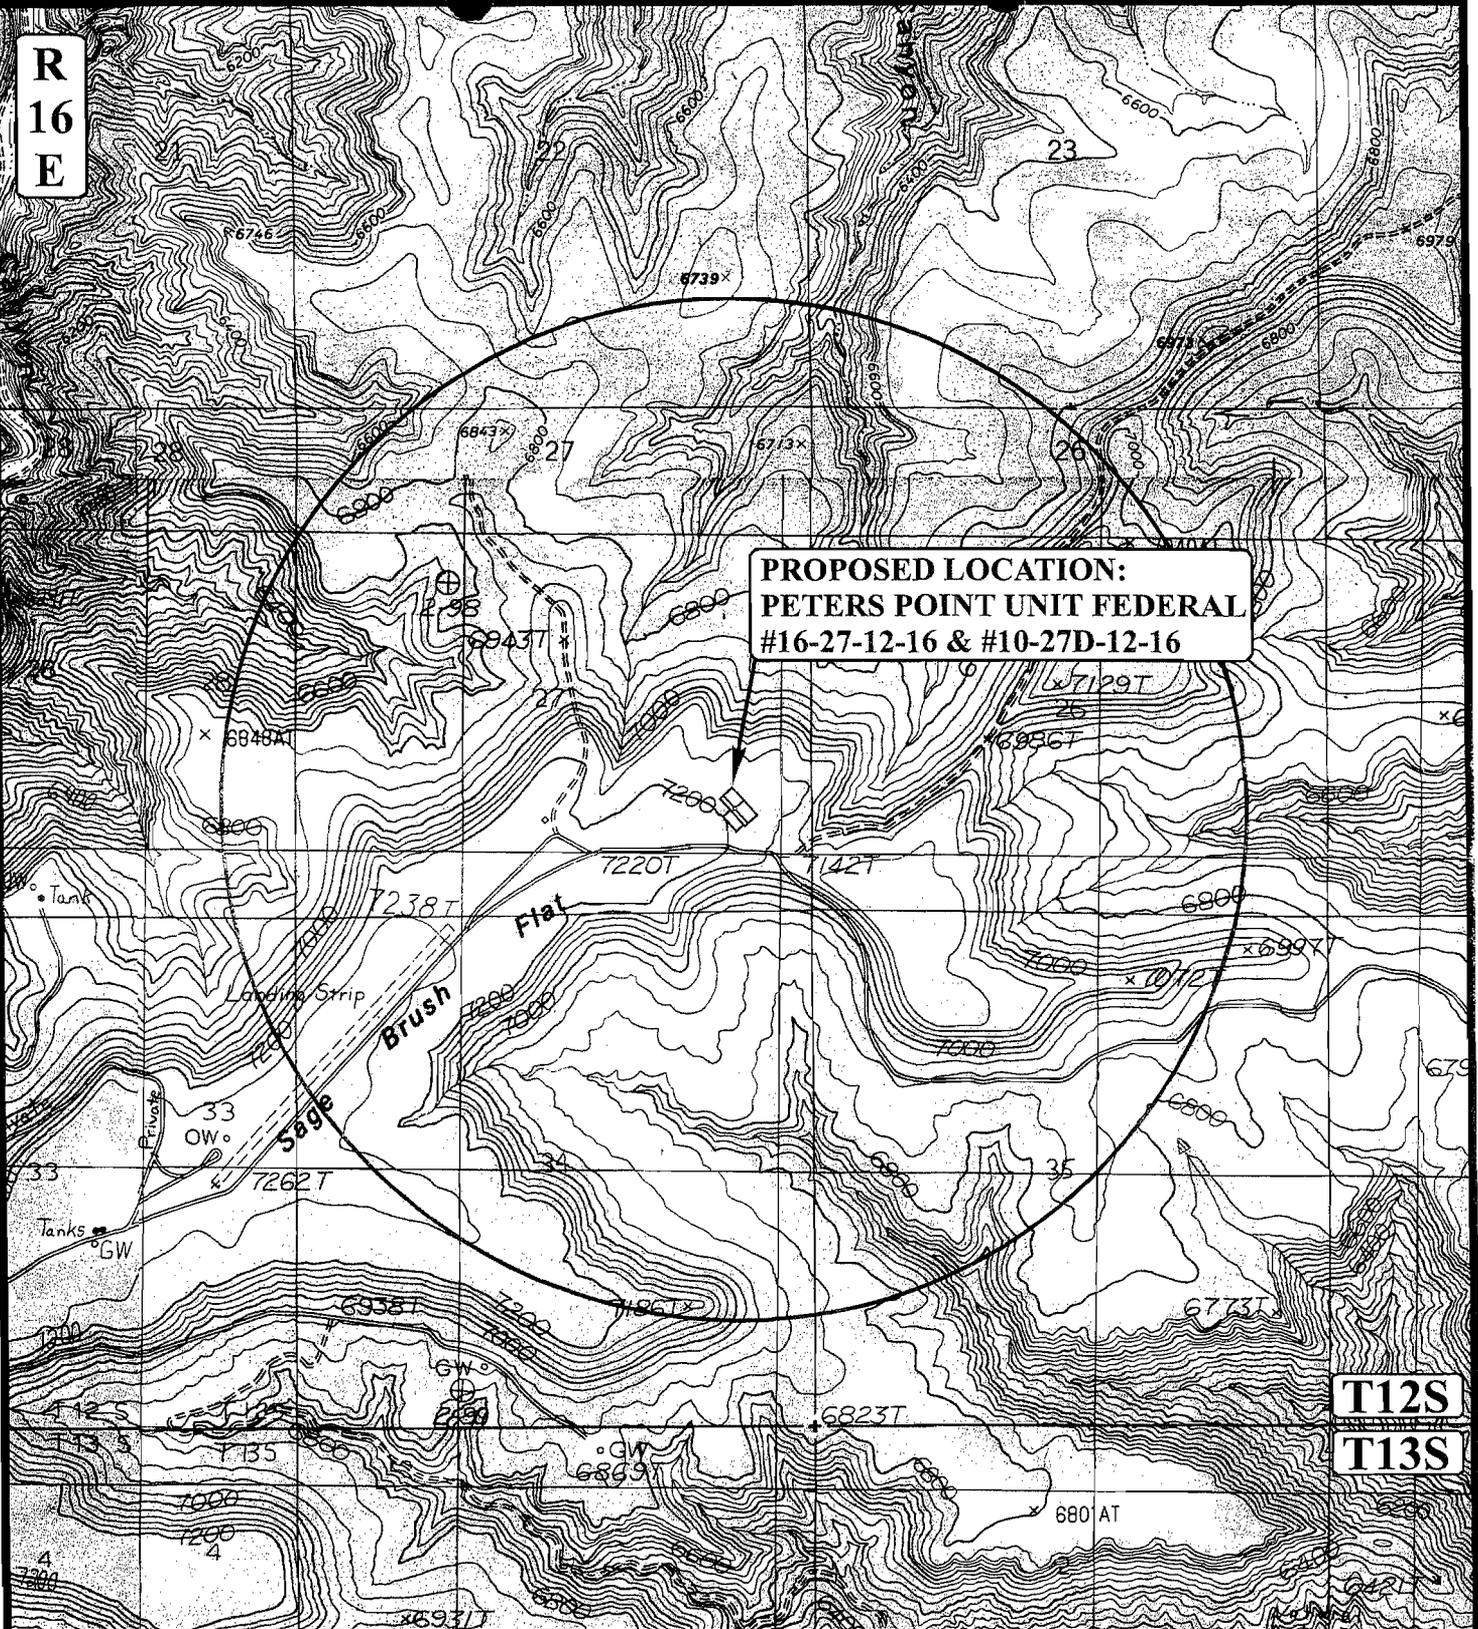

**T12S  
T13S**

**LEGEND:**

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ⊗ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

**BILL BARRETT CORPORATION**

PETERS POINT UNIT FEDERAL  
#16-27-12-16 & #10-27D-12-16  
SECTION 27, T12S, R16E, S.L.B.&M.  
SE 1/4 SE 1/4



Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813


TOPOGRAPHIC  
MAP

02 03 06  
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: B.C. REVISED: 06-29-07



ADDENDUM TO TOPOGRAPHIC MAP C

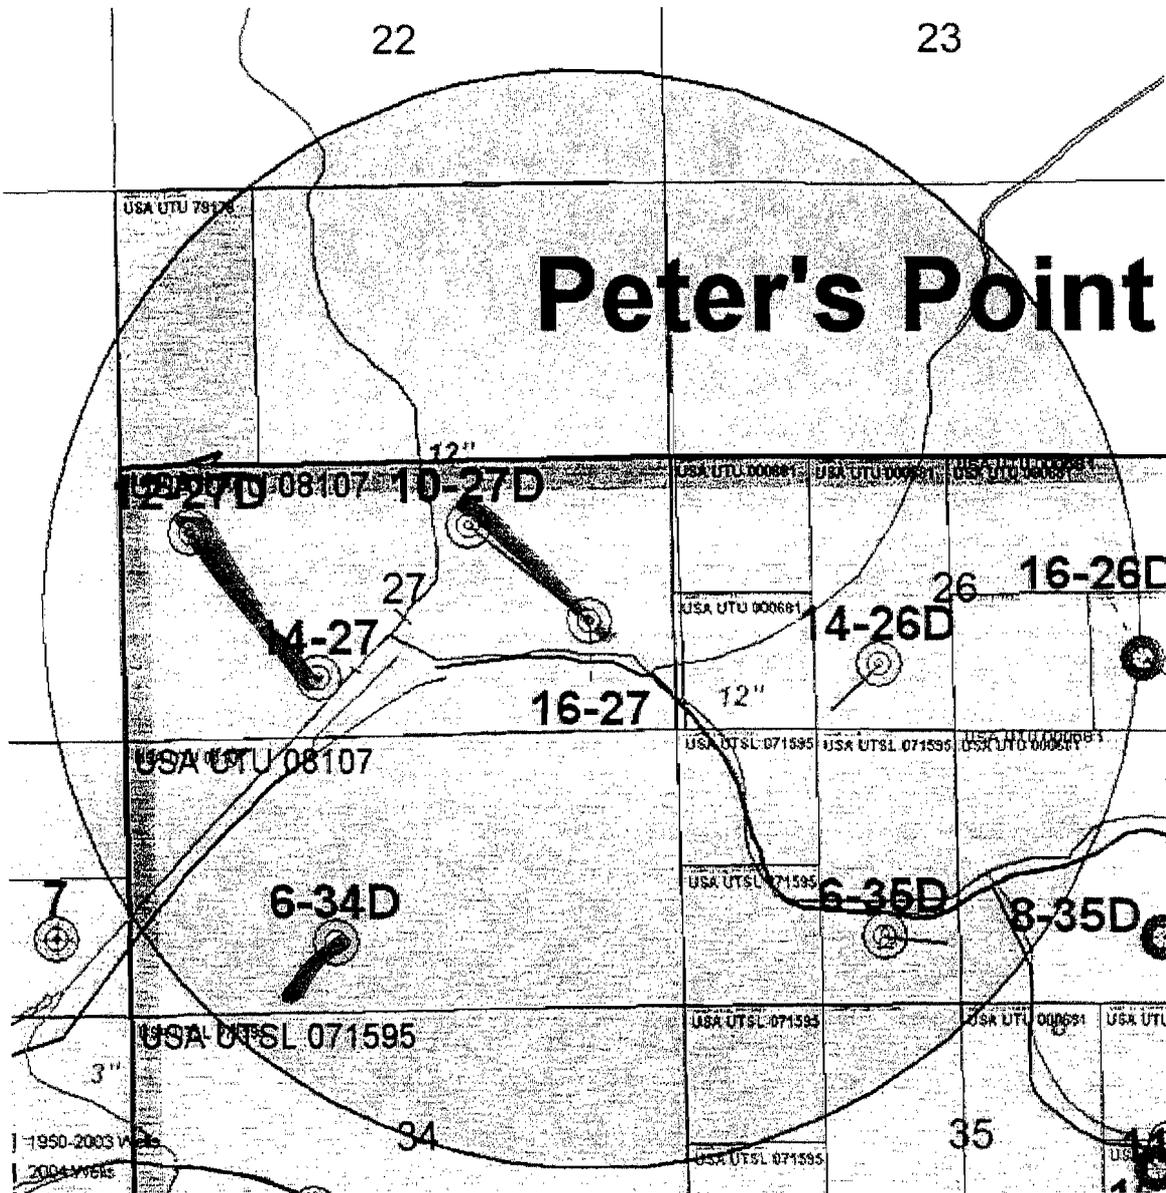

 Planned

R  
16  
E

PROPOSED LOCATION:  
PETERS POINT UNIT FEDERAL  
#16-27-12-16 & #10-27D-12-16

PROPOSED ACCESS ROAD

EXISTING PIPELINE

PROPOSED PIPELINE

TIE-IN POINT

T12S

APPROXIMATE TOTAL PIPELINE DISTANCE = 659' +/-

**LEGEND:**

-  PROPOSED ACCESS ROAD
-  EXISTING PIPELINE
-  PROPOSED PIPELINE
-  PROPOSED PIPELINE (SERVICING OTHER WELLS)

**BILL BARRETT CORPORATION**

PETERS POINT UNIT FEDERAL  
#16-27-12-16 & #10-27D-12-16  
SECTION 27, T12S, R16E, S.L.B.&M.  
SE 1/4 SE 1/4

**U&Ls**  
Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813

N



TOPOGRAPHIC MAP  
02 03 06  
MONTH DAY YEAR  
SCALE: 1" = 1000' DRAWN BY: B.C. REVISED: 07-26-07

**D**  
TOPO

Option H



# Proposed Facility Layout

(1 of 2)

BILL BARRETT CORPORATION

LOCATION LAYOUT FOR

PETERS POINT UNIT FEDERAL  
#16-27-12-16 & #10-27D-12-16  
SECTION 27, T12S, R16E, S.L.B.&M.  
SE 1/4 SE 1/4



SCALE: 1" = 60'

DATE: 02-10-06

DRAWN BY: S.L.

REVISED: 06-27-07 P.M.

Existing 2-Track

Proposed Access Road

F-4.4'  
El. 190.4'

Sta. 3+91

57°48'28"W 2683.99'  
(TO PROPOSED #16-27-12-16)

NOTE:  
Flare Pit is to be located a min. of 100' from the Well Head.

C-3.6'  
El. 198.4'

Buried Dump Lines  
El. 195.9'

Pit Topsoil  
El. 197.9'  
C-3.1'

El. 202.4'  
C-15.6'  
(Btm. Pit)

Reserve Pit Backfill & Spoils Stockpile

Total Pit Capacity  
W/2' of Freeboard  
= 16,830 Ebls. ±  
Total Pit Volume  
= 4,920 Cu. Yds

Approx. Top of Cut Slope

10' WIDE BENCH

RESERVE PIT 8' DEEP

SLOPE 1 1/2:1

C-1.6'  
El. 196.4'

TRASH

C-1.0'  
El. 195.8'

C-1.1'  
El. 195.9'

C-3.4'

WATER

PUMP

MUD SHED

HOPPER

POWER

TOOLS

FUEL

El. 192.2'

F-1.1'  
El. 193.7'

F-8.8'  
El. 186.0'

DOG HOUSE

TRAILER

TOILET

FUEL

STORAGE TANK

Round Corners as Needed

F-4.1'  
El. 190.7'

Topsoil Stockpile

Sta. 2+00

Approx. Toe of Fill Slope

Sta. 0+00

Elev. Ungraded Ground At #16-27 Loc. Stake = 7195.9'  
FINISHED GRADE ELEV. AT #16-27 LOC. STAKE = 7194.8'


UINTAH ENGINEERING & LAND SURVEYING  
85 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017

Option B

(2 of 2)

BILL BARRETT CORPORATION  
LOCATION LAYOUT FOR


PETERS POINT UNIT FEDERAL  
#16-27-12-16 & #10-27D-12-16  
SECTION 27, T12S, R16E, S.L.B.&M.  
SE 1/4 SE 1/4



SCALE: 1" = 60'  
DATE: 02-10-06  
DRAWN BY: S.L.  
REVISED: 06-27-07 P.M.

NOTE:  
Flare Pit is to  
be located a min.  
of 100' from the  
Well Head.

578°48'28"W 2693.95'  
(TO PROPOSED  
#14-27-12-16)

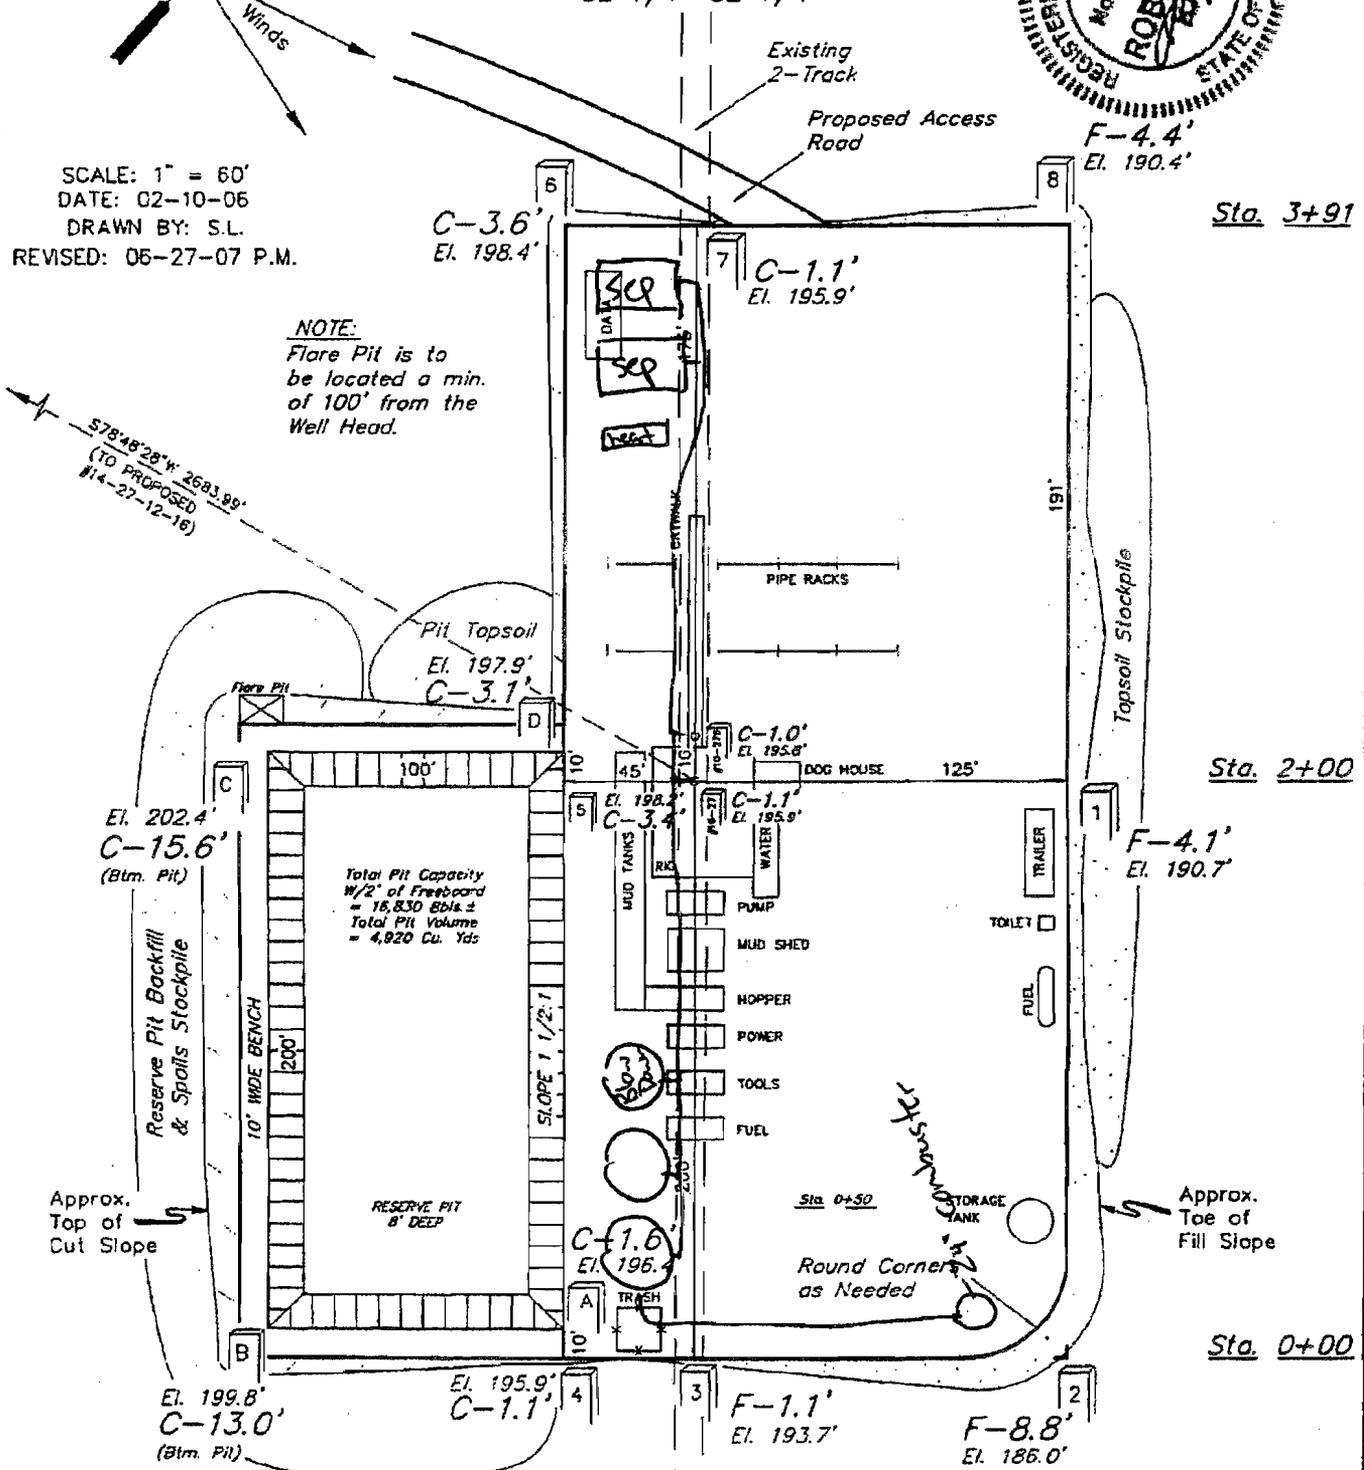

El. 202.4'  
C-15.6'  
(Btm. Pit)

Total Pit Capacity  
w/2' of Freeboard  
= 16,830 Bbls ±  
Total Pit Volume  
= 4,920 Cu. Yds

Approx.  
Top of  
Cut Slope

El. 199.8'  
C-13.0'  
(Btm. Pit)

El. 195.9'  
C-1.1'

F-1.1'  
El. 193.7'

F-8.8'  
El. 186.0'

Sta. 3+91

Sta. 2+00

F-4.1'  
El. 190.7'

Sta. 0+00

Elev. Ungraded Ground At #16-27 Loc. Stake = 7195.9'  
FINISHED GRADE ELEV. AT #16-27 LOC. STAKE = 7194.8'

UINTAH ENGINEERING & LAND SURVEYING  
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

**WORKSHEET  
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 07/27/2007

API NO. ASSIGNED: 43-007-31318

WELL NAME: PPU FED 16-27-12-16  
 OPERATOR: BILL BARRETT CORP ( N2165 )  
 CONTACT: TRACEY FALLANG

PHONE NUMBER: 303-312-8134

PROPOSED LOCATION:  
 SESE 27 120S 160E  
 SURFACE: 1037 FSL 0802 FEL  
 BOTTOM: 1037 FSL 0802 FEL  
 COUNTY: CARBON  
 LATITUDE: 39.74040 LONGITUDE: -110.1031  
 UTM SURF EASTINGS: 576855 NORTHINGS: 4399120  
 FIELD NAME: PETER'S POINT ( 40 )

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal  
 LEASE NUMBER: UTU-008107  
 SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: PRRV  
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:


Plat  
 Bond: Fed[1] Ind[] Sta[] Fee[]  
 (No. WYB000040 )  
 Potash (Y/N)  
 Oil Shale 190-5 (B) or 190-3 or 190-13  
 Water Permit  
 (No. 90-1846 )  
 RDCC Review (Y/N)  
 (Date: \_\_\_\_\_ )  
 Fee Surf Agreement (Y/N)  
 Intent to Commingle (Y/N)

LOCATION AND SITING:

         R649-2-3.  
 Unit: PETERS POINT  
         R649-3-2. General  
 Siting: 460' From Qtr/Qtr & 920' Between Wells  
         R649-3-3. Exception  
 Drilling Unit  
 Board Cause No: 157-3  
 Eff Date: 5-24-01  
 Siting: 460' fr. ext. unit boundary  
         R649-3-11. Directional Drill

COMMENTS: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

STIPULATIONS: 1- Federal Approval  
 \_\_\_\_\_  
 \_\_\_\_\_

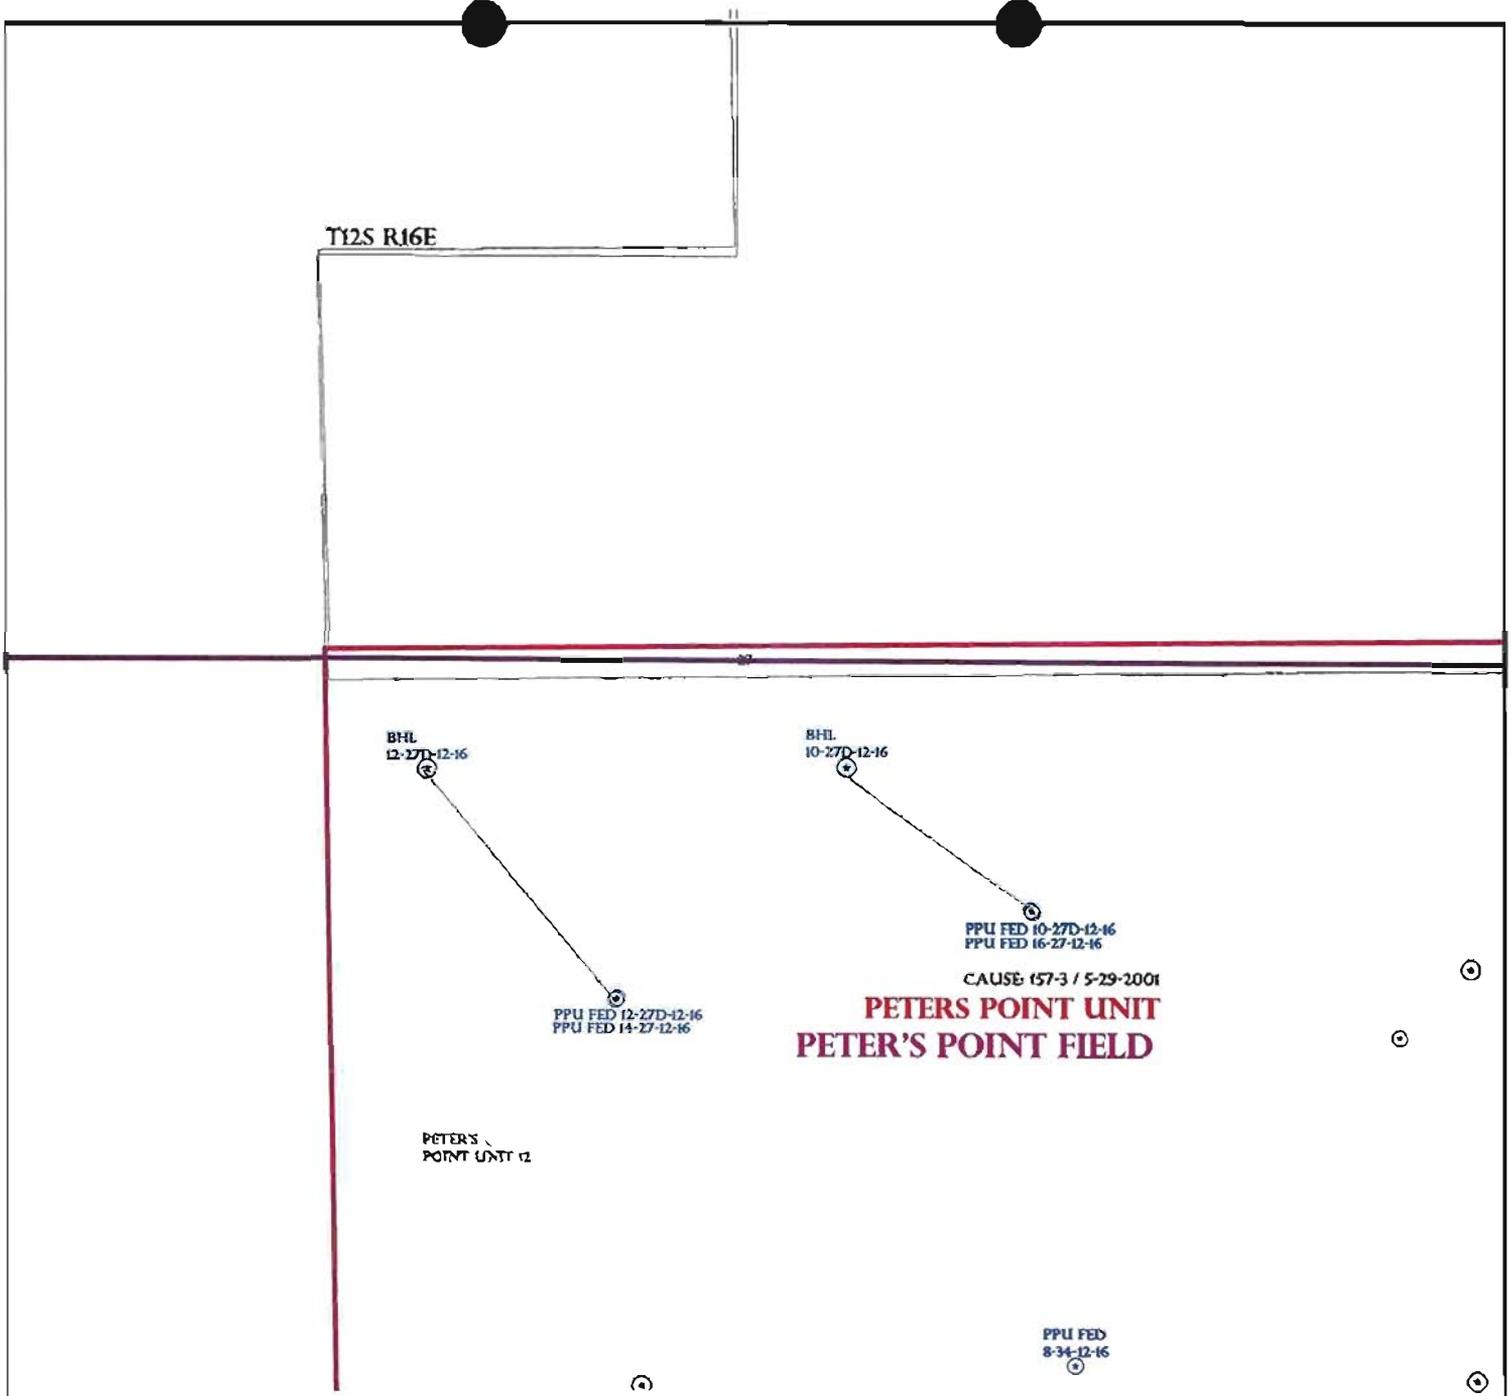

OPERATOR: BILL BARRETT CORP (N2165)

SEC: 27 T.12S R.16E

FIELD: PETERS POINT (40)

COUNTY: CARBON

CAUSE: 157-3 / 5-29-2001



- Field Status**
- ABANDONED
  - ACTIVE
  - COMBINED
  - INACTIVE
  - PROPOSED
  - STORAGE
  - TERMINATED

- Unit Status**
- EXPLORATORY
  - GAS STORAGE
  - NF PP OIL
  - NF SECONDARY
  - PENDING
  - PI OIL
  - PP GAS
  - PP GEOTHERML
  - PP OIL
  - SECONDARY
  - TERMINATED

- Wells Status**
- GAS INJECTION
  - GAS STORAGE
  - LOCATION ABANDONED
  - NEW LOCATION
  - PLUGGED & ABANDONED
  - PRODUCING GAS
  - PRODUCING OIL
  - SHUT-IN GAS
  - SHUT-IN OIL
  - TEMP. ABANDONED
  - TEST WELL
  - WATER INJECTION
  - WATER SUPPLY
  - WATER DISPOSAL
  - DRILLING



PREPARED BY: DIANA MASON  
DATE: 2-AUGUST-2007

# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office

P.O. Box 45155

Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:

3160

(UT-922)

August 2, 2007

Memorandum

To: Assistant Field Office Manager Resources,  
Moab Field Office

From: Michael Coulthard, Petroleum Engineer

Subject: 2007 Plan of Development Peter's Point Unit  
Carbon County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2007 within the Peter's Point Unit, Carbon County, Utah.

API#	WELL NAME	LOCATION
------	-----------	----------

(Proposed PZ Price River)

43-007-31318	Peter's P Fed 16-27-12-16	Sec 27 T12S R16E 1037 FSL 0802 FEL
43-007-31319	Peter's P Fed 10-27D-12-16	Sec 27 T12S R16E 1049 FSL 0813 FEL
	BHL Sec 27 T12S R16E 1968	FSL 1982 FEL

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard

bcc: File - Peter's Point Unit  
Division of Oil Gas and Mining  
Central Files  
Agr. Sec. Chron  
Fluid Chron

MCoulthard:mc:8-2-07



JON M. HUNTSMAN, JR.  
Governor

GARY R. HERBERT  
Lieutenant Governor

**State of Utah**  
DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
Executive Director

**Division of Oil Gas and Mining**

JOHN R. BAZA  
Division Director

August 2, 2007

Bill Barrett Corporation  
1099 18th St., Ste. 2300  
Denver, CO 80202

Re: Peter's Point Unit Federal 16-27-12-16 Well, 1037' FSL, 802' FEL, SE SE, Sec. 27,  
T. 12 South, R. 16 East, Carbon County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-007-31318.

Sincerely,

Gil Hunt  
Associate Director

pab  
Enclosures

cc: Carbon County Assessor  
Bureau of Land Management, Moab Office



Operator: Bill Barrett Corporation  
Well Name & Number Peter's Point Unit Federal 16-27-12-16  
API Number: 43-007-31318  
Lease: UTU-008107

Location: SE SE                      Sec. 27                      T. 12 South                      R. 16 East

### Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division with 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281 office      (801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**CONFIDENTIAL**

FORM APPROVED  
OMB No. 1004-0137  
Expires: March 31, 2007

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**SUBMIT IN TRIPLICATE- Other instructions on reverse side.**

1. Type of Well  
 Oil Well     Gas Well     Other

2. Name of Operator **BILL BARRETT CORPORATION**

3a. Address  
**1099 18th Street Suite 2300 Denver CO 80202**

3b. Phone No. (include area code)  
**303 312-8134**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**SESE, 1037' FSL, 802' FEL, Sec. 27, T12S-R16E**

5. Lease Serial No.  
**UTU-08107**

6. If Indian, Allottee or Tribe Name  
 n/a

7. If Unit or CA/Agreement, Name and/or No.  
**PETER'S POINT/UTU-063014**

8. Well Name and No.  
**Peter's Point Unit Fed 16-27-12-16**

9. API Well No.  
**Pending 13-007-31318**

10. Field and Pool, or Exploratory Area  
**Peter's Point/Wasatch-Mesaverde**

11. County or Parish, State  
**Carbon County, UT**

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>Change in TD</b>
	<input checked="" type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

**BILL BARRETT CORPORATION IS SUBMITTING THIS SUNDRY AS NOTIFICATION THAT THE PROPOSED DEPTH HAS BEEN REVISED ON THIS WELL. THE NEW INFORMATION IS AS FOLLOWS:**

**REVISED MD TD: 8000'**  
**REVISED CEMENT VOLUME: 1570 sx**  
**REVISED BHP: 3952 psi**

IF YOU HAVE ANY QUESTIONS OR NEED FURTHER INFORMATION, PLEASE CONTACT ME AT 303-312-8134

Approved by the  
 Utah Division of  
 Oil, Gas and Mining

Date: **08-13-07**  
 By: *[Signature]*

14. I hereby certify that the foregoing is true and correct  
 Name (Printed/Typed) **Tracey Fallang** Title **Environmental/Regulatory Analyst**

Signature *Tracey Fallang* Date **08/07/2007**

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office \_\_\_\_\_

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

8-15-07  
 RM

**RECEIVED**  
**AUG 08 2007**  
 STATE ONLY  
 DIV. OF OIL, GAS & MINING

**BBC  
CONFIDENTIAL**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**APPLICATION FOR PERMIT TO DRILL OR REENTER**

5. Lease Serial No. <b>UTU-008107</b>	
6. If Indian, Allottee or Tribe Name <b>n/a</b>	
7. If Unit or CA Agreement, Name and No. <b>Peter's Point Unit/UTU-063014</b>	
8. Lease Name and Well No. <b>Peter's Point Unit Fed #16-27-12-16</b>	
9. API Well No. <b>pending 4300731318</b>	
1a. Type of work <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER	10. Field and Pool, or Exploratory <b>Peter's Point/Wasatch-Mesaverde</b>
1b. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone	11. Sec., T, R, M. or Blk. and Survey or Area <b>Sec. 27, T12S-R16E</b>
2. Name of Operator <b>BILL BARRETT CORPORATION</b>	
3a. Address <b>1099 18th Street, Suite 2300 Denver CO 80202</b>	3b. Phone No. (include area code) <b>(303) 312-8134</b>
12. County or Parish <b>Carbon</b>	
13. State <b>UT</b>	
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface <b>SESE, 1037' FSL, 802' FEL.</b> At proposed prod. zone <b>same</b>	
14. Distance in miles and direction from nearest town or post office* <b>approximately 50 miles from Myton, Utah</b>	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) <b>802'</b>	16. No. of acres in lease <b>640</b>
17. Spacing Unit dedicated to this well <b>40 acres</b>	18. Distance from proposed* location to nearest well, drilling, completed, applied for, on this lease, ft. <b>16'</b>
19. Proposed Depth <b>8000'</b>	20. BLM-BIA Bond No. on file <b>Nationwide Bond #WYB000040</b>
21. Elevations (Show whether DF, KDB, RT, GL, etc.) <b>7196' ungraded ground</b>	22. Approximate date work will start* <b>08/30/2007</b>
23. Estimated duration <b>45 days</b>	

**24. Attachments**

The following completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- |   |  |
|---|--|
| 1. Well plat certified by a registered surveyor.  | 4. Bond to cover the operations unless covered by an existing bond on file (see item 20 above).    |
| 2. A Drilling Plan  | 5. Operator certification  |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature <i>Tracey Fallang</i>	Name (Printed/Typed) <b>Tracey Fallang</b>	Date <b>7/26/07</b>
--	---	------------------------

Title **Environmental/Regulatory Analyst**

Approved by (Signature) <i>/s/ A. Lynn Jackson</i>	Name (Printed/Typed) <b>/s/ A. Lynn Jackson</b>	Date <b>8/22/07</b>
---	--	------------------------

Title **Assistant Field Manager, Division of Resources** Office **Division of Resources Mesa Field Office**

Application approval does not warrant or certify that the applicant has legal or equitable title to those lands in which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

\*(Instructions on page 2)

**CONDITIONS OF APPROVAL ATTACHED**


**RECEIVED**

**AUG 27 2007**

**DIV. OF OIL, GAS & MINING**

T12S, R16E, S.L.B.&M.

N89°55'W - 5287.92' (G.L.O.)

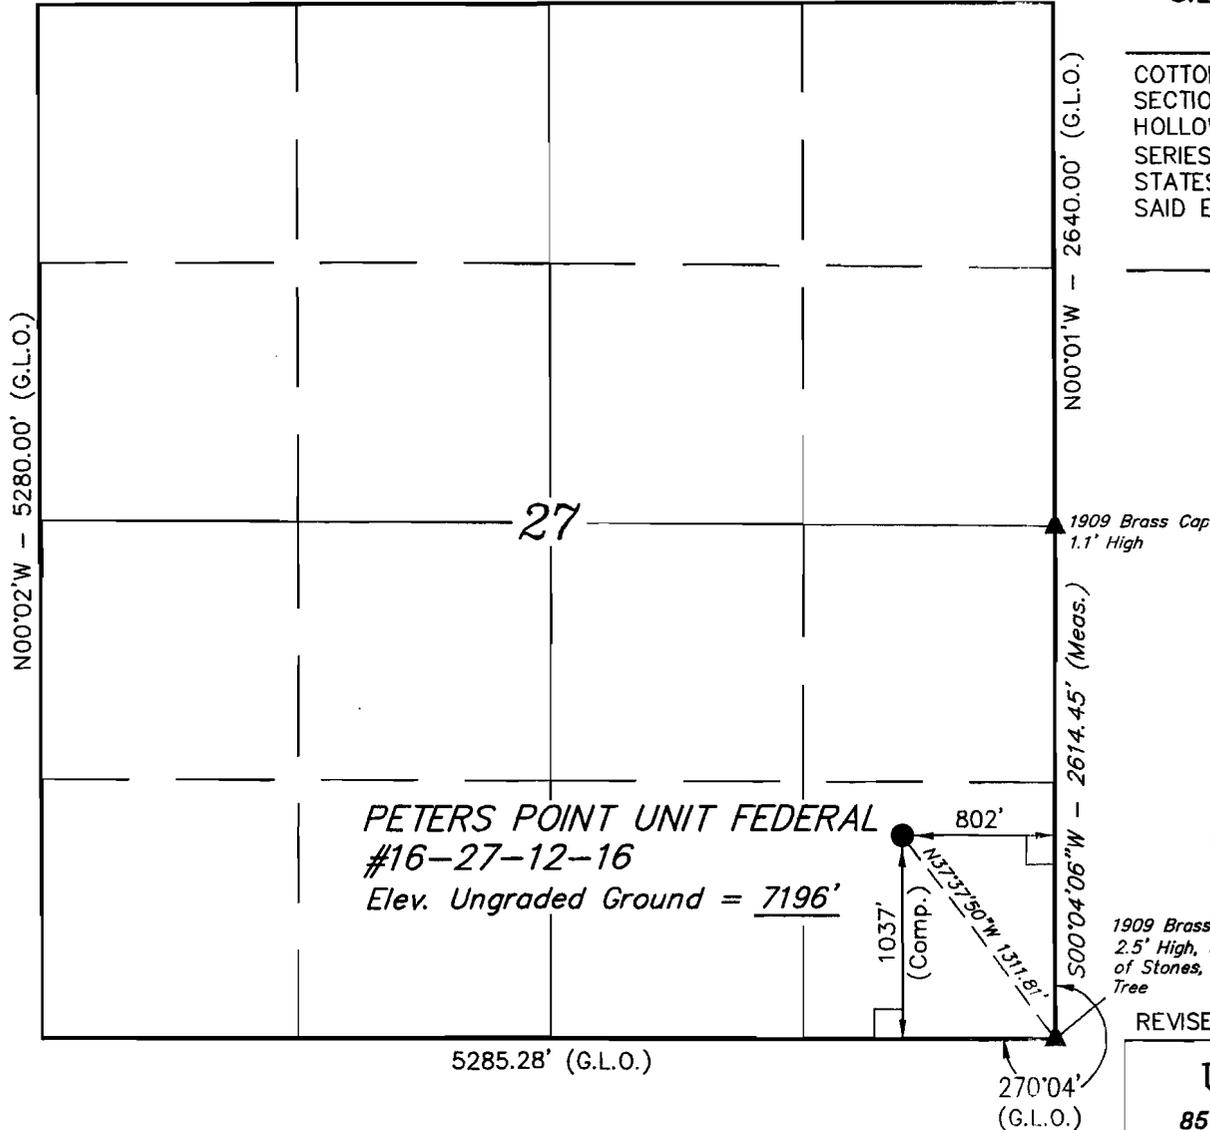

PETERS POINT UNIT FEDERAL  
#16-27-12-16  
Elev. Ungraded Ground = 7196'

**BILL BARRETT CORPORATION**


Well location, PETERS POINT UNIT FEDERAL #16-27-12-16, located as shown in the SE 1/4 SE 1/4 of Section 27, T12S, R16E, S.L.B.&M., Carbon County, Utah.

**BASIS OF ELEVATION**

COTTON TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 31, T12S, R16E, S.L.B.&M., TAKEN FROM THE TWIN HOLLOW QUADRANGLE, UTAH, CARBON COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 7386 FEET.

**BASIS OF BEARINGS**

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

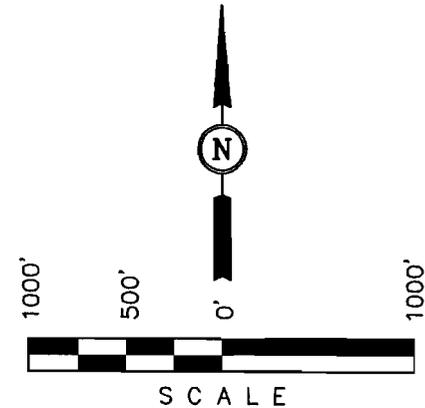

CERTIFICATE OF SURVEY  
THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEY MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE TO THE BEST OF MY KNOWLEDGE AND BELIEF.  
ROBERT BARRETT  
REGISTERED LAND SURVEYOR  
REGISTRATION NO. 161319  
STATE OF UTAH

1909 Brass Cap  
2.5' High, Pile  
of Stones, Bearing  
Tree

REVISED: 06-26-07 P.M.

**UINTAH ENGINEERING & LAND SURVEYING**  
85 SOUTH 200 EAST - VERNAL, UTAH 84078  
(435) 789-1017

**LEGEND:**

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)  
LATITUDE = 39°44'25.92" (39.740533)  
LONGITUDE = 110°06'13.74" (110.103817)  
(NAD 27)  
LATITUDE = 39°44'26.05" (39.740569)  
LONGITUDE = 110°06'11.19" (110.103108)

SCALE 1" = 1000'	DATE SURVEYED: 01-14-06	DATE DRAWN: 02-10-06
PARTY D.R.    A.H.    S.L.	REFERENCES G.L.O. PLAT	
WEATHER COOL	FILE BILL BARRETT CORPORATION	

Bill Barrett Corporation  
**Peters Point Unit Federal 16-27-12-16**  
Peters Point Unit  
Lease UTU-08107  
SE/SE Sec. 27, T12S, R16E  
Carbon County, Utah

**A COMPLETE COPY OF THIS APPROVED PERMIT and Conditions of Approval shall be maintained on location during all construction and drilling operations, and shall be available to contractors to ensure compliance.**

#### CONDITIONS OF APPROVAL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be advised that Bill Barrett Corporation is considered to be the operator of the above well and is responsible under the terms and conditions of the lease for the operations conducted on the leased lands.

Bond coverage for this well is provided by **WYB000040** (Principal – Bill Barrett Corporation) via surety consent as provided for in 43 CFR 3104.2.

This office will hold the aforementioned operator and bond liable until the provisions of 43 CFR 3106.7-2 continuing responsibility are met.

This permit will be valid for a period of two years from the date of approval. After permit termination, a new application must be filed for approval.

All lease operations will be conducted in full compliance with applicable regulations (43 CFR 3100), Onshore Oil and Gas Orders, lease terms, notices to lessees, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. Failure to comply with the provisions of this permit, including applicable regulations, stipulations, and/or approval conditions, will be considered a violation subject to the enforcement provisions of 43 CFR Subpart 3163.

## A. DRILLING PROGRAM

1. The proposed 3M BOP system is adequate for anticipated conditions. Installation, testing and operation of the system shall be in conformance with Onshore Oil and Gas Order No. 2.
2. Concurrent approval from the State of Utah, Division of Oil, Gas & Mining (DOG M) is required before conducting any surface disturbing activities.
3. The proposal included a provision for using minor amounts of diesel in the drilling fluid system. Diesel may be added to the system only after cementing the surface casing into place.
4. The proposal included options for using one of three different grades of production casing. Any of the three options may be used.
5. The production casing shall be cemented such that the top-of-cement extends a minimum of 100 feet into the surface casing.
6. A cement bond log (CBL) or other appropriate tool for determining top-of-cement, shall be run on the production casing string, unless cement is circulated to surface.
7. If logging reveals that the cementing objectives were not met, remedial cementing will be required.
8. Locally, the Green River Formation is known to contain oil, gas, oil shale and tar sand deposits. However, the lateral occurrence, distribution and grade of the oil shale and tar sand deposits are not well defined. The operator shall pay particular attention to this section, and shall attempt to identify and describe any of these resources that may be penetrated. Any information obtained on these resources shall be included as part of the Well Completion Report.

**UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
Price Field Office  
Price, Utah**

**SURFACE USE  
CONDITIONS OF APPROVAL**

Project Name: Peter's Point Unit Drilling

Operator: Bill Barrett Corporation

Well:

<u>Name</u>	<u>Number</u>	<u>Section SH</u>	<u>TWP/RNG</u>	<u>Lease Number</u>
Peter's Point Federal	16-27-12-16	27	12S/16E	UTU- 063014

**I Site Specific Conditions of Approval**

1. A pre-construction field meeting may be conducted prior to beginning any dirt work approved under this APD. The operator shall contact the BLM Authorized Officer Don Stephens @ 435-636-3608 at least 48-hours prior to beginning operations so that the meeting can be scheduled. The operator is responsible for having all contractors present (dirt contractors, drilling contractor, pipeline contractor, project oversight personnel, etc.) including the overall field operations superintendent, and for providing all contractors copies of the approved APD(s), project map and BLM Conditions of Approval pertinent to the work that each will be doing.
2. The following appendices are attached for your reference. They are to be followed as conditions of approval:

SM-A, Seed Mixture for Berms, Topsoil Piles, Pad Margins  
SM-B, Seed Mixture for Final Reclamation (buried pipelines,  
abandoned pads, roads, etc.)

TMC1, Browse Hand Planting Tubeling Mixtures

Lease Stipulations, see attached Table 2.3 from EA for West Tavaputs  
Plateau Drilling Program.

Applicant-committed environmental protection measures, see attached  
Appendix B

3. The area that encompasses the well location and road is environmentally sensitive including fragile soils and vegetation. The operator may be required to perform special measures such as mulching, erosion fencing, use of erosion fabric, etc. per the direction of the BLM Authorized Officer to stabilize any disturbed areas and ensure the reestablishment of long-term perennial vegetation.
4. The operator will be responsible for performing any remediation and/or necessary road upgrading (e.g. elevating, surfacing, culverts, low-water crossings, water-wings, surfacing, etc.) as directed by the BLM Authorized Officer, resulting from untimely access.
5. All equipment and personnel used during drilling and construction activities will be restricted to only approved access roads.
6. If the well is productive and after completion operations, the road will be upgraded to a **Resource Road** status in accordance with the *Surface Operating Standards for Oil & Gas Exploration and Development*, Fourth Edition and/or BLM Manual Section 9113 concerning road construction standards on projects subject to federal jurisdiction.
7. All permanent above-ground structures (e.g., production equipment, tanks, etc.) not subject to safety requirements will be painted to blend with the natural color of the landscape. The paint used will be a color which simulates "Standard Environmental Colors." The color selected for the Peter's Point Federal 16-27-12-16 well is Olive Black, SWA20-6. All facilities will be painted the designated color at the time of installation.
8. All trees salvaged from the construction of the well pad will be clearly segregated from the spoil material, to prevent burying of trees in the spoil material.
9. No salvaged trees will be pushed up against live trees or buried in the spoil material.
10. All areas not needed for production of the well will be reclaimed within 90 days of completion if weather conditions are favorable, unless the BLM Authorized Officer gives an extension.
11. Reserve pits will be closed as soon as possible, but no later than 90 days from time of drilling/well completion, unless the BLM Authorized Officer gives an extension. Squeezing of pit fluids and cuttings is prohibited. Pits must be dry of fluids or they must be removed via vac-truck or other environmentally acceptable method prior to backfilling, re-contouring and replacement of topsoil. Mud and cuttings left in pit must be buried at least 3-feet below re-contoured grade. The operator will be responsible for re-contouring any subsidence areas that develop from closing a pit before it is sufficiently dry.

12. The operator will drill seed on the contour to a depth of 0.5 inch, followed by cultipaction to compact the seedbed, preventing soil and seed losses. To maintain quality and purity, the current years tested, certified seed with a minimum germination rate of 80% and a minimum purity of 90% will be used. left the ground and prior to May 15.
13. Please contact Don Stephens, Natural Resource Specialist, (435) 636-3608, Bureau of Land Management, Price Field Office, if there are any questions concerning these surface use COAs.
14. A Paleontologist acceptable to the BLM will monitor during surface disturbing activities. If paleontologic resources are uncovered during surface disturbing activities, the paleontologist shall immediately notify the Authorized Officer (AO). The AO will arrange for a determination of significance and, if necessary, recommend a recovery or avoidance plan.
15. The pipeline(s) shall be buried.
16. During the activities of road maintenance, new road construction or the construction of well pads, if any standing live or dead trees are damaged, cut down or knocked over by grading or construction equipment, actions would be taken to remove excessive vegetation from the road or pad edge. These materials would either be chipped on site and dispersed along the road or pad edge or hauled to BLM approved locations and piled for disposal in a manner that would not present a fuel hazard. Piles must be located in openings so that no pile would be within 30 feet of standing live trees. The piled vegetation must also be located adjacent to and accessible by road.
17. An impermeable liner shall be used in the containment area of all permanent condensate and water tanks.
18. Gas shall be measured on the well pad unless the BLM Authorized Officer authorizes another location.
19. If the well has not been spudded by July 29, 2009 the APD will expire and the operator is to cease all operations related to preparing to drill the well.
20. The Mexican Spotted Owl Conservation Measures to avoid impacts:
  - a. Employ best available technology on production wells and compression equipment within .5 miles of canyon habitat model.
  - b. Upon discovery of individuals or sightings of this species, halt construction/drilling activities and notify authorized official.

21. No construction/drilling activities shall occur during the time of the year November 1 through May 15 for sage-grouse winter habitat.
22. Mule deer on critical winter ranges shall be protected by seasonal restrictions on construction from November 1 through May 15 where federal permits are required.
23. Elk on high priority and critical winter ranges would be protected by seasonal restrictions on construction from November 1 through May 15.
24. BBC shall participate in a wildlife enhancement project to improve habitat for mule deer and elk. A project to be determined with BLM, Utah Division of Wildlife Resources and BBC.

## **II Standard Conditions of Approval**

### **A. General**

1. If any cultural values [sites, artifacts, human remains] are observed during operation of this lease/permit/right-of-way, they will be left intact and the Price Field Manager notified. The authorized officer will conduct an evaluation of the cultural values to establish appropriate mitigation, salvage or treatment. The operator is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator is to immediately stop work that might further disturb such materials, and contact the authorized BLM officer (AO). Within five working days the AO will inform the operator as to:
  - whether the materials appear eligible for the National Register of Historic Places;
  - the mitigation measures the operator will likely have to undertake before the site can be used (assuming in situ preservation is not necessary); and,
  - a time-frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that the required mitigation has been completed, the operator will then be allowed to resume construction measures.

2. The operator shall restrict travel on unimproved roads during periods of inclement weather or spring thaw when the possibility exists for excessive surface resource damage (e.g., rutting in excess of 4-inches, travel outside roadway, etc.).
3. The Companies will provide georeferenced spatial data depicting as-built locations of all facilities, wells, roads, pipelines, power lines, and other related facilities to the BLM by November 1 of each year until completion of project construction activities has occurred.
4. If any dead or injured threatened, endangered, proposed, or candidate species is located during construction or operation, the BLM Price Field Office (435-636-3600) shall be notified within 24 hours.
5. The Company will conduct clearance surveys for threatened, endangered or other special-concern species at the optimum time. This will require coordination with the BLM before November 1 annually to review the potential for disturbance and to agree on inventory parameters.

#### **B. Construction**

1. The operator will limit vegetation removal and the degree of surface disturbance wherever possible. Where surface disturbance cannot be avoided, all practicable measures will be utilized to minimize erosion and stabilize disturbed soils.
2. Construction and drilling activity will not be conducted using frozen or saturated soil material during periods when watershed damage or excessive rutting is likely to occur.
3. Remove all available topsoil from constructed well locations including areas of cut and fill, and stockpile at the site. Topsoil will also be salvaged for use in reclamation on all other areas of surface disturbance (roads, pipelines, etc.). Clearly segregate topsoil from excess spoil material. Any topsoil stockpiled for one year or longer will be signed and stabilized with annual ryegrass or other suitable cover crop.
4. The operator will not push soil material and overburden over side slopes or into drainages. All soil material disturbed will be placed in an area where it can be retrieved without creating additional undue surface disturbance and where it does not impede watershed and drainage flows.
5. Construct the backslope no steeper than 1½:1, and construct the foreslope no steeper than 2:1, unless otherwise directed by the BLM Authorized Officer.
6. Maintain a minimum 20-foot undisturbed vegetative border between toe-of-fill of pad and/or pit areas and the edge of adjacent drainages, unless otherwise directed by the BLM Authorized Officer.
7. With the overall objective of minimizing surface disturbance and retaining land stability and productivity, the operator shall utilize equipment that is appropriate to the scope and scale of work being done for roads and well pads (utilize equipment no larger than needed for the job).

8. Reserve pits will be adequately fenced during and after drilling operations until pit is reclaimed so as to effectively keep out wildlife and livestock. Adequate fencing, in lieu of more stringent requirements by the surface owner, is defined as follows:
  - Construction materials will consist of steel or wood posts. Three or four strand wire (smooth or barbed) fence or hog panel (16-foot length by 50-inch height) or plastic snow fence must be used with connectors such as fence staples, quick-connect clips, hog rings, hose clamps, twisted wire, etc. Electric fences will not be allowed.
  - Construction standards: Posts shall be firmly set in ground. If wire is used, it must be taut and evenly spaced, from ground level to top wire, to effectively keep out animals. Hog panels must be tied securely into posts and one another using fence staples, clamps, etc. Plastic snow fencing must be taut and sturdy. Fence must be at least 2-feet from edge of pit. 3 sides fenced before beginning drilling, the fourth side fenced immediately upon completion of drilling and prior to rig release. Fence must be left up and maintained in adequate condition until pit is closed.
9. The reserve pit will be oriented to prevent collection of surface runoff. After the drilling rig is removed, the operator may need to construct a trench on the uphill side of the reserve pit to divert surface drainage around it. If constructed, the trench will be left intact until the pit is closed.
10. The reserve pit will be lined with an impermeable liner if permeable subsurface material is encountered. An impermeable liner is any liner having a permeability less than  $10^{-7}$  cm/sec. The liner will be installed so that it will not leak and will be chemically compatible with all substances that may be put in the pit. Liners made of any man-made synthetic material will be of sufficient strength and thickness to withstand normal installation and pit use. In gravelly or rocky soils, a suitable bedding material such as sand will be used prior to installing the liner.
11. The reserve pit will be constructed so that at least half of its total volume is in solid cut material (below natural ground level).
12. The reserve pit shall have 2 foot of freeboard maintained at all times to prevent overflow of fluids.
13. Culverts will be placed on channel bottoms on firm, uniform beds, which have been shaped to accept them, and aligned parallel to the channel to minimize erosion. Backfill will be thoroughly compacted.
14. The minimum diameter for culverts will be 18 inches. However, all culverts will be appropriately sized in accordance with standards in BLM Manual 9113.
15. Construction and other project-related traffic will be restricted to approved routes. Cross-country vehicle travel will not be allowed.
16. Maximum design speed on all operator-constructed and maintained roads will not exceed 25 miles per hour.

17. Pipeline construction shall not block nor change the natural course of any drainage. Pipelines shall cross perpendicular to drainages. Pipelines shall not be run parallel in drainage bottoms. Suspended pipelines shall provide adequate clearance for maximum runoff.
18. Pipeline trenches shall be compacted during backfilling. Pipeline trenches shall be routinely inspected and maintained to ensure proper settling, stabilization and reclamation.
19. The pipeline right-of-way will be brush-hogged to prevent unnecessary disturbance. Only those areas where safety, absolute need for construction or other regulations may warrant the use of topsoil removal by blading or scalping.
20. During construction, emissions of particulate matter from well pad and road construction would be minimized by application of water or other non-saline dust suppressants with at least 50 percent control efficiency. Dust inhibitors (surfacing materials, non-saline dust suppressants, and water) will be used as necessary on unpaved roads that present a fugitive dust problem. The use of chemical dust suppressants on public surface will require prior approval from the BLM Authorized Officer.
21. The operator shall submit a Sundry Notice (Form 3160-5) to BLM for approval prior to construction of any new surface disturbing activities that are not specifically addressed in the approved APD.

### **C. Operations/Maintenance**

1. If in the process of air drilling the wells there is a need to utilize mud, all circulating fluids will be contained either in an approved pit or in an aboveground containment tank. The pit or containment tank will be large enough to safely contain the capacity of all expected fluids without danger of overflow. Fluid and cuttings will not be squeezed out of the pit, and the pit will be reclaimed in an expedient manner.
2. Confine all equipment and vehicles to the access road(s), pad(s), and area(s) specified in the approved APD.
3. All waste, other than human waste and drilling fluids, will be contained in a portable trash cage. This waste will be transported to a State approved waste disposal site immediately upon completion of drilling operations. No trash or empty barrels will be placed in the reserve pit or buried on location. All state and local laws and regulations pertaining to disposal of human and solid waste will be complied with.
4. Rat and mouse holes shall be filled and compacted from the bottom to the top immediately upon release of the drilling rig from the location.
5. The operator will be responsible for prevention and control of noxious weeds and weeds of concern on all areas of surface disturbance associated with this project (well locations, roads, water management facilities, etc.) Use of pesticides shall comply with the applicable Federal and State laws. Pesticides shall be used only

in accordance with their registered uses and within limitations imposed by the Secretary of Interior. Prior to the use of pesticides on public land, the holder shall obtain from the BLM authorized officer written approval of a plan showing the type and quantity of material to be used, pest(s) to be controlled, method of application, location of storage and disposal of containers, and any other information deemed necessary by the authorized officer to such use.

6. Sewage shall be placed in a self-contained, chemically treated porta-potty on location.
7. The operator and their contractors shall ensure that all use, production, storage, transport and disposal of hazardous and extremely hazardous materials associated with the drilling, completion and production of these wells will be in accordance with all applicable existing or hereafter promulgated federal, state and local government rules, regulations and guidelines. All project-related activities involving hazardous materials will be conducted in a manner to minimize potential environmental impacts. In accordance with OSHA requirements, a file will be maintained onsite containing current Material Safety Data Sheets (MSDS) for all chemicals, compounds and/or substances which are used in the course of construction, drilling, completion and production operations.
8. Produced fluids shall be put in test tanks on location during completion work. Produced water will be put in the reserve pit during completion work per Onshore Order #7.
9. The only fluids/waste materials which are authorized to go into the reserve pit are RCRA exempt exploration and production wastes. These include:
  - drilling muds & cuttings
  - rigwash
  - excess cement and certain completion & stimulation fluids defined by EPA as exempt

It does not include drilling rig waste, such as:

- spent hydraulic fluids
- used engine oil
- used oil filter
- empty cement, drilling mud, or other product sacks
- empty paint, pipe dope, chemical or other product containers
- excess chemicals or chemical rinseate

Any evidence of non-exempt wastes being put into the reserve pit may result in the BLM Authorized Officer requiring specific testing and closure requirements.

10. If this well is drilled during the fire season (June-October), the operator shall institute all necessary precautions to ensure that fire hazard is minimized, including but not limited to mowing vegetation on the access route(s) and well location(s), keeping fire fighting equipment readily available when drilling, etc.

#### **D. Dry Hole/Reclamation**

1. All disturbed lands associated with this project, including the pipelines, access roads, water management facilities, etc will be expediently reclaimed and reseeded in accordance with the surface use plan and any pertinent site-specific COAs.
2. Disturbed lands will be re-contoured back to conform with existing undisturbed topography. No depressions will be left that trap water or form ponds.
3. Before the location has been reshaped and prior to redistributing the topsoil, the operator will rip or scarify the drilling platform and access road on the contour, to a depth of at least 12 inches. The rippers are to be no farther than 24 inches apart.
4. Distribute the topsoil evenly over the entire location and other disturbed areas. Prepare the seedbed by disking to a depth of 4-to-6 inches following the contour.
5. Phased reclamation plans will be submitted to BLM for approval prior to individual POD facility abandonment via a Notice of Intent (NOI) Sundry Notice. Individual facilities, such as well locations, pipelines, discharge points, impoundments, etc. need to be addressed in these plans as they are no longer needed. Individual items that will need to be addressed in reclamation plans include:
  - Pit closure (Close ASAP after suitably dry, but no later than 90 days from time of drilling unless an extension is given by BLM Authorized Officer.) BLM may require closure prior to 90 days in some cases due to land use or environmental concerns.
  - Configuration of reshaped topography, drainage systems, and other surface manipulations
  - Waste disposal
  - Revegetation methods, including specific seed mix (pounds pure live seed/acre) and soil treatments (seedbed preparation, fertilization, mulching, etc.). On private surface, the landowner should be consulted for the specific seed mix.
  - Other practices that will be used to reclaim and stabilize all disturbed areas, such as water bars, erosion fabric, hydro-mulching, etc.
  - An estimate of the timetables for beginning and completing various reclamation operations relative to weather and local land uses.
  - Methods and measures that will be used to control noxious weeds, addressing both ingress and egress to the individual well or POD.
  - Decommissioning/removal of all surface facilities
6. BLM will not release the performance bond until all disturbed areas associated with the APD/POD have been successfully revegetated (evaluation will be made

after the second complete growing season) and has met all other reclamation goals of the surface owner and surface management agency.

7. A Notice of Intent to Abandon and a Subsequent Report of Abandonment must be submitted for abandonment approval.
8. For performance bond release approval, a Final Abandonment Notice (with a surface owner release letter on split-estate) must be submitted prior to a final abandonment evaluation by BLM.
9. Soil fertility testing and the addition of soil amendments may be required to stabilize some disturbed lands.
10. Any mulch utilized for reclamation needs to be certified weed free.
11. Waterbars are to be constructed at least one (1) foot deep, on the contour with approximately two (2) feet of drop per 100 feet of waterbar to ensure drainage, and extended into established vegetation. All waterbars are to be constructed with the berm on the downhill side to prevent the soft material from silting in the trench. The initial waterbar should be constructed at the top of the backslope. Subsequent waterbars should follow the following general spacing guidelines:

Slope (percent)	Spacing Interval (feet)
≤ 2	200
2 - 4	100
4 - 5	75
≥ 5	50

#### **E. Producing Well**

1. Reclaim those areas not required for production as soon as possible. The fluids and mud must be dry in the reserve pit before re-contouring pit area. The operator will be responsible for re-contouring and reseeded of any subsidence areas that develop from closing a pit before it is completely dry.
2. Reduce the backslope to 2:1 and the foreslope to 3:1, unless otherwise directed by the BLM Authorized Officer. Reduce slopes by pulling fill material up from foreslope into the toe of cut slopes.
3. Production facilities (including dikes) must be placed on the cut portion of the location and a minimum of 15 feet from the toe of the back cut unless otherwise approved by the BLM Authorized Officer.
4. Any spilled or leaked oil, produced water or treatment chemicals must be reported in accordance with NTL-3A and immediately cleaned up in accordance with

BLM requirements. This includes clean-up and proper disposition of soils contaminated as a result of such spills/leaks.

5. Distribute stockpiled topsoil evenly over those areas not required for production and reseed as recommended.
6. Upgrade and maintain access roads and drainage control (e.g., culverts, drainage dips, ditching, crowning, surfacing, etc.) as necessary and as directed by the BLM Authorized Officer to prevent soil erosion and accommodate safe, environmentally-sound access.
7. Prior to construction of production facilities not specifically addressed in the APD, the operator shall submit a Sundry Notice to the BLM Authorized Officer for approval.
8. If not already required prior to constructing and drilling the well location, the operator shall immediately upgrade the entire access road to BLM standards (including topsoiling, crowning, ditching, drainage culverts, surfacing, etc.) to ensure safe, environmentally-sound, year-round access. Waterbars shall be installed on all reclaimed pipeline corridors per the guidelines in D #11.

**Seed Mix A<sup>1</sup>**  
**Temporary Disturbance**  
 (for berms, topsoil piles, pad margins)

**Forbes Lbs**

Yellow Sweetclover	2.0 lbs/acre
Ladak Alfalfa	2.0 lbs/acre
Cicer Milkvetch	1.0 lbs/acre
Palmer Penstemon	0.5 lbs/acre

**Grasses Lbs**

Crested Wheatgrass	2.0 lbs/acre
Great Basin Wildrye	2.0 lbs/acre
Intermediate Wheatgrass	2.0 lbs/acre

**Total** 11.5 lbs/acre

<sup>1</sup> Seed mix A is designed for rapid establishment, soil holding ability, and nitrogen fixing capability.  
 C-4 EA, West Tavaputs Plateau Drilling Program

**Seed Mix B**  
**Final Reclamation**  
 (for buried pipe lines, abandoned pads, road, etc.)

**Forbes Lbs**

Palmer Penstemon	0.5 lbs/acre
Golden Cryptantha	0.25 lbs/acre
Utah Sweetvetch	0.5 lbs/acre
Yellow Sweetclover <sup>1</sup>	2.0 lbs/acre
Lewis Flax	1.0 lbs/acre

**Grasses Lbs**

Indian Ricegrass	1.0 lbs/acre
Needle & Thread Grass	1.0 lbs/acre
Intermediate Wheatgrass	2.0 lbs/acre
Blue Grama	0.5 lbs/acre
Galletta	0.5 lbs/acre
Great Basin Wildrye	2.0 lbs/acre

**Woody Plants Lbs**

Fourwing Saltbush	2.0 lbs/acre
Winterfat	0.5 lbs/acre
Wyoming Big Sage brush	0.25 lbs/acre
Utah Serviceberry	1.0 lbs/acre
Blue Elderberry (Raw Seeds)	1.0 lbs/acre

**Total** 16.0 lbs/acre

<sup>1</sup> Yellow Sweetclover is planted as a nurse crop to provide solar protection, soil binding and nitrogen fixing. It will normally be crowded out in 2 to 3 years.

**TMC 1: Browse Hand Planting  
Tubeling Mixtures**

One of the two browse species lists (checked below) are to be hand planted at the prescribed application rate and according to the following prescribed methods on areas that are undergoing long term reclamation. This would include all pipeline corridors, berm around edge of drill pads, miscellaneous disturbed areas associated with construction such as staging areas for equipment, sidecast on road cuts, along side upgraded or new roads up to and including borrow ditch and in the termination of redundant access roads being closed. This planting shall be completed in the first planting window following completion of construction and on all other disturbed areas upon final reclamation.

**Planting Methods:**

Planting shall be accomplished using a labor force with specific experience in landscape restoration, hand planting methods and handling and care of browse tubling and or bareroot stock plants.

Browse plants to be utilized can be bareroot stock or tubling stock plants of 1 year old age class or greater.

Browse seedling protectors will be used to provide protection from browsing ungulates for two years. Seedling protectors will be of an open mesh rigid design that will break down when exposed to sunlight and that measures a minimum of 12 inches in length and 4 inches in diameter.

Planting shall be completed in the spring (March 1-April 1) and or fall (November 1-December 1) planting windows.

Browse plants shall be stored and handled in such a manner as to maintain viability, according to the type of browse stock being used.

**Planting Species and Application Rate:**

	<input type="checkbox"/> Sagebrush-Grass	<input type="checkbox"/> Pinyon-
<b>Juniper</b>	<u>Plants Per Acre</u>	
Species		
Wyoming Sagebrush (Gordon Creek)	100	50
Fourwing Saltbush (Utah seed source collected at or above 5,000 feet elevation)	100	50
True Mountain Mahogany (Utah seed source)	0	50
Antelope Bitterbrush (Utah seed source)	0	50
<b>Total</b>	<b>200</b>	<b>200</b>

**Suitable Substitutions:**

Utah Serviceberry	no	50
Winterfat	100	no

### C. REQUIRED APPROVALS, REPORTS AND NOTIFICATIONS

Required verbal notifications are summarized in Table 1, attached.

Building Location- Contact the Price Field Office, Natural Resource Protection Specialist at least 48-hours prior to commencing construction of location.

Spud- Submit written notification (Sundry Notice, Form 3160-5) to the Moab Field Office within 24-hours after spud, regardless of whether using a dry hole digger or big rig.

Daily Drilling Reports- Daily drilling reports that describe the progress and status of the well shall be submitted to the Moab Field Office on at least a weekly basis. This report may be in any format customarily used by the operator.

Oil and Gas Operations Reports (OGORs)- Production from this well shall be reported to Minerals Management Service (MMS) on a monthly basis.

Sundry Notices- Any modification to the proposed drilling program shall be submitted to the Moab Field Office on a Sundry Notice (Form 3160-5). Regulations at 43 CFR 3162.3-2 describe which operations require prior approval, and which require notification.

Drilling Suspensions- Operations authorized by this permit shall not be suspended for more than 30 days without prior approval of the Moab Field Office. All conditions of this approval shall be applicable during any operations conducted with a replacement rig.

Undesirable Events- Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be immediately reported to the BLM in accordance with requirements of NTL-3A.

Cultural Resources- If cultural resources are discovered during construction, immediately notify the Price Field Office, and work that might disturb the cultural resources shall cease.

First Production- A first production conference will be scheduled as soon as the productivity of the well is apparent. This conference should be coordinated through the Price Field Office.

Notify the Moab Field Office when the well is placed into production. Initial notification may be verbal, but must be confirmed in writing within five business days. Please include the date production started, the producing formation and production volumes.

Well Completion Report- Whether the well is completed as a dry hole or as a producer, a *Well Completion or Recompletion Report and Log* (Form 3160-4) shall be submitted to the Moab Field Office within thirty-days after completion of the well. Two copies of all logs, core descriptions, core analyses, well test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. When requested, samples (cuttings and/or samples) will be submitted to the Moab Field Office.

Venting/Flaring of Gas- Gas produced from this well may not be vented/flared beyond an initial, authorized test period of 30 days or 50 MMcf, whichever first occurs, without the prior, written approval of the Moab Field Office. Should gas be vented or flared without approval beyond the authorized test period, the well may be ordered to be shut-in until the gas can be captured or until approval to continue the venting/flaring pursuant to NTL-4A is granted. Compensation shall be due for gas that is vented/flared without approval.

Produced Water- An application for approval of a permanent disposal method and location will be submitted to the Moab Field Office for approval pursuant to Onshore Oil and Gas Order No.7.

Off-Lease Measurement, Storage, Commingling- Prior approval must be obtained from the Moab Field Office for off-lease measurement, off-lease storage and/or commingling of production prior to the sales measurement point. The term "commingling" describes both the combining of production from different geologic zones and/or combining production from different leases or agreement areas.

Plugging and Abandonment- If the well is a dry hole, plugging instructions must be obtained from the Moab Field Office prior to initiating plugging operations.

A "Subsequent Report of Abandonment" (Sundry Notice, Form 3160-5) will be filed with the Moab Field Office within thirty-days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Upon completion of approved plugging, a regulation marker will be erected in accordance with 43 CFR 3162.6. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the Price Field Office or the appropriate surface managing agency.

## TABLE 1

## NOTIFICATIONS

Notify Walton Willis (435-636-3662), Don Stephens (435-636-3608) or Nathan Sill (435-636-3668) of the BLM Price Field Office for the following:

2 days prior to starting dirt work, construction and reclamation (Stephens or Sill);

1 day prior to spud (Stephens or Sill);

50 feet prior to reaching the surface casing setting depth (Willis);

3 hours prior to testing BOP equipment (Willis).

If the person at the above number cannot be reached, notify the BLM Moab Field Office at 435-259-2100.

Well abandonment operations require 24-hour advance notice and prior approval. In the case of newly drilled dry holes, verbal approval can be obtained from:

Eric Jones, Petroleum Engineer

Office: 435-259-2117

Home: 435-259-2214

**DIVISION OF OIL, GAS AND MINING**

**SPUDDING INFORMATION**

Name of Company: BILL BARRETT CORPORATION

Well Name: PPU FED 16-27-12-16

Api No: 43-007-31318 Lease Type: FEDERAL

Section 27 Township 12S Range 16E County CARBON

Drilling Contractor CRAIG'S ROUSTABOUT SERV RIG # RATHOLE

**SPUDDED:**

Date 08/29/07

Time 5:00 PM

How DRY

**Drilling will Commence:** \_\_\_\_\_

Reported by TRACEY FALLANG – E-MAIL

Telephone # \_\_\_\_\_

Date 08/30/07 Signed CHD

**CONFIDENTIAL**

**ENTITY ACTION FORM**

Operator: Bill Barrett Corporation  
Address: 1099 18th Street, Suite 2300  
city Denver  
state CO zip 80202

Operator Account Number: N 2165

Phone Number: (303) 312-8134

**Well 1**

API Number	Well Name		QQ	Sec	Twp	Rng	County
4300731318	Peter's Point Unit Federal 16-27-12-16		SESE	27	12S	16E	Carbon
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
A	99999	16319	8/29/2007		8/30/07		
Comments: Spudding Operations were conducted by Craig's Roustabout Service #3 on 8/29/2007 @ 5:00 p.m. PRRV = MVRD							

**CONFIDENTIAL**

**Well 2**

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
Comments:							

**Well 3**

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
Comments:							

**ACTION CODES:**

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Tracey Fallang

Name (Please Print)

*Tracey Fallang*

Signature

Environmental Analyst

8/29/2007

Title

Date

RECEIVED

AUG 29 2007

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**CONFIDENTIAL**

FORM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

**SUNDRY NOTICES AND REPORTS ON WELLS**  
**Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.**



5. Lease Serial No.  
UTU-008107

6. If Indian, Allottee or Tribe Name  
N/A.

**SUBMIT IN TRIPLICATE – Other instructions on page 2.**

1. Type of Well

Oil Well     Gas Well     Other

2. Name of Operator  
Bill Barrett Corporation

3a. Address  
1099 18th Street, Suite 2300, Denver, CO 80202

3b. Phone No. (include area code)  
303-312-8134

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
SESE, 1037 FSL, 802 FEL  
Sec. 27, T12S-R16E

7. If Unit of CA/Agreement, Name and/or No.  
Peter's Point Unit / UTU-063014

8. Well Name and No.  
Peter's Point Unit Federal 16-27-12-16

9. API Well No.  
43-007-31318

10. Field and Pool or Exploratory Area  
Peter's Point/Wasatch-Mesaverde

11. Country or Parish, State  
Carbon County, UT

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Spud
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

This sundry is being submitted as notification of well spud on 8/29/07. Spudding operations were handled by Craig's Roustabout Services.

**RECEIVED**

**SEP 04 2007**

**DIV. OF OIL, GAS & MINING**

14. I hereby certify that the foregoing is true and correct.  
Name (Printed/Typed)

Tracey Fallang

Title Environmental/Regulatory Analyst

Signature

*Tracey Fallang*

Date 08/29/2007

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**CONFIDENTIAL**

FORM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
UTU-008107

6. If Indian, Allottee or Tribe Name  
N/A

**SUBMIT IN TRIPLICATE** - Other instructions on page 2.

1. Type of Well  
 Oil Well  Gas Well  Other

**CONFIDENTIAL**

7. If Unit of CA/Agreement, Name and/or No.  
PETERS POINT UNIT/UTU-063014

2. Name of Operator  
BILL BARRETT CORPORATION

8. Well Name and No.  
PETER'S POINT UNIT FED #16-27-12-16

3a. Address  
1099 18TH STREET SUITE 2300, DENVER, COLORADO 80202

3b. Phone No. (include area code)  
303-312-8134

9. API Well No.  
43-007-31318

10. Field and Pool or Exploratory Area  
PETER'S POINT/WASATCH-MESAVERDE

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
SESE 1037' FSL, 802' FEL  
SEC. 27, T12S, R16E

11. Country or Parish, State  
CARBON COUNTY, UTAH

**12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>WEEKLY ACTIVITY</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<u>REPORT</u>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

WEEKLY DRILLING ACTIVITY REPORT FROM 08/31/07 - 09/06/07

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed)  
TRACEY FALLANG

Title ENVIRONMENTAL/REGULATORY ANALYST

Signature

*Tracey Fallang*

Date 09/06/2007

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

**RECEIVED**

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**SEP 10 2007**

(Instructions on page 2)

# REGULATORY DRILLING SUMMARY



Well : Peter's Point #16-27-12-16      API # : 43-007-31318      Operations Date : 9/1/2007  
Surface Location : SESE-27-12S-16 E 26th PM      Area : West Tavaputs      Report # : 4  
Spud Date : 8/30/2007      Days From Spud : 2      Depth At 06:00 :  
Morning Operations : Moving Rig      Estimated Total Depth : 7510

Remarks :  
461 DAYS SINCE LAST LOST TIME ACCIDENT.  
DAILY SAFETY MEETING: W/Hagman Trucking.  
TUBULARS ON PETERS POINT 8-34 LOCATION  
342-JOINTS OF 4 1/2" DRILL PIPE [65 in f/h.band]  
40-JOINTS OF 4 1/2" HEAVY WEIGHT DRILL PIPE  
23-JOINTS OF 6 1/4" DRILL COLLARS  
1-8" SLICK M.M. S/N 8042 [out] HOURS=60  
1-6 1/2" SLICK M.M. S/N 6060 [out] HOURS=29.5  
1-6 1/2" A.K.O. M.M. S/N 6169 [out] HOURS=0  
1-6 1/2" A.K.O. M.M. S/N 6273 [out] HOURS=90.5+++  
DIESEL FUEL ON LOCATION=4880 GALLONS.  
DIESEL FUEL USED DAILY=0 GALLONS  
DIESEL FUEL USED TOTAL=531 GALLONS  
WATER USED DAILY= 0BBL.  
WATER USED TOTAL=0 BBL.

Time To	Description
6:00 AM	Rig Down & Move Rig

Well : Peter's Point #16-27-12-16      API # : 43-007-31318      Operations Date : 8/31/2007  
Surface Location : SESE-27-12S-16 E 26th PM      Area : West Tavaputs      Report # : 3  
Spud Date : 8/30/2007      Days From Spud : 1      Depth At 06:00 :  
Morning Operations : Rigging Down/Wait on Location      Estimated Total Depth : 7510

Remarks :  
460 DAYS SINCE LAST LOST TIME ACCIDENT.  
DAILY SAFETY MEETING:Cleaning & Painting, Laying  
Derrick Over.  
TUBULARS ON PETERS POINT 8-34 LOCATION  
342-JOINTS OF 4 1/2" DRILL PIPE [65 in f/h.band]  
40-JOINTS OF 4 1/2" HEAVY WEIGHT DRILL PIPE  
23-JOINTS OF 6 1/4" DRILL COLLARS  
1-8" SLICK M.M. S/N 8042 [out] HOURS=60  
1-6 1/2" SLICK M.M. S/N 6060 [out] HOURS=29.5  
1-6 1/2" A.K.O. M.M. S/N 6169 [out] HOURS=0  
1-6 1/2" A.K.O. M.M. S/N 6273 [out] HOURS=90.5+++  
DIESEL FUEL ON LOCATION=4880 GALLONS.  
DIESEL FUEL USED DAILY=90 GALLONS  
DIESEL FUEL USED TOTAL=531 GALLONS  
WATER USED DAILY= 0BBL.  
WATER USED TOTAL=0 BBL.

Notified Walton(BLM) of Spud.

Craig's drilled surface and run 9.625" casing.

Haliburton cemented the Surface Casing with cement  
returning to surface.

Time To	Description
6:00 AM	Rig Down & Wait on Location

# REGULATORY DRILLING SUMMARY



Bill Barrett Corporation

Well : Peter's Point #16-27-12-16

API # : 43-007-31318

Operations Date : 9/3/2007

Surface Location : SESE-27-12S-16 E 26th PM

Area : West Tavaputs

Report # : 6

Spud Date : 8/30/2007 Days From Spud : 4

Depth At 06:00 : 1041

Morning Operations : Pick Up HWDP

Estimated Total Depth : 7510

Remarks :

463 DAYS SINCE LAST LOST TIME ACCIDENT.  
DAILY SAFETY MEETING: Nipple Up BOP, Testing BOP.  
TUBULARS ON PETERS POINT 8-34 LOCATION  
342-JOINTS OF 4 1/2" DRILL PIPE [65 in f/h.band]  
40-JOINTS OF 4 1/2" HEAVY WEIGHT DRILL PIPE  
23-JOINTS OF 6 1/4" DRILL COLLARS  
1-8" SLICK M.M. S/N 8042 [out] HOURS=60  
1-6 1/2" SLICK M.M. S/N 6060 [out] HOURS=29.5  
1-6 1/2" A.K.O. M.M. S/N 6169 [in] HOURS=0  
1-6 1/2" A.K.O. M.M. S/N 6273 [out] HOURS=90.5+++  
DIESEL FUEL ON LOCATION=6749 GALLONS.  
DIESEL FUEL USED DAILY=2331 GALLONS  
DIESEL FUEL USED TOTAL=2862 GALLONS  
WATER USED DAILY= 4700BBL.  
WATER USED TOTAL=4700 BBL.

Notified Walton (BLM) of BOP Test and Drilling out.

ANN 1300, Man 2600, AXX 2800

Well : Peter's Point #16-27-12-16

API # : 43-007-31318

Operations Date : 9/2/2007

Surface Location : SESE-27-12S-16 E 26th PM

Area : West Tavaputs

Report # : 5

Spud Date : 8/30/2007 Days From Spud : 3

Depth At 06:00 :

Morning Operations : Rigging Up

Estimated Total Depth : 7510

Remarks :

462 DAYS SINCE LAST LOST TIME ACCIDENT.  
DAILY SAFETY MEETING: Rigging Up, Rigging Up  
Derrick.  
TUBULARS ON PETERS POINT 8-34 LOCATION  
342-JOINTS OF 4 1/2" DRILL PIPE [65 in f/h.band]  
40-JOINTS OF 4 1/2" HEAVY WEIGHT DRILL PIPE  
23-JOINTS OF 6 1/4" DRILL COLLARS  
1-8" SLICK M.M. S/N 8042 [out] HOURS=60  
1-6 1/2" SLICK M.M. S/N 6060 [out] HOURS=29.5  
1-6 1/2" A.K.O. M.M. S/N 6169 [out] HOURS=0  
1-6 1/2" A.K.O. M.M. S/N 6273 [out] HOURS=90.5+++  
DIESEL FUEL ON LOCATION=4880 GALLONS.  
DIESEL FUEL USED DAILY=0 GALLONS  
DIESEL FUEL USED TOTAL=531 GALLONS  
WATER USED DAILY= 0BBL.  
WATER USED TOTAL=0 BBL.

Time To	Description
6:00 PM	Rigging Up
1:00 AM	Test Lower Kelly Upper Kelly Valve Pipe Rams T.KI.W 1st Kill 1st Choke Piperams & T.I.W 2nd Kill and HCR Low 250 High 3000 Annular 250 Low High 1500 Blindrams Kill Check Inside Choke Manifold Valves Blinds Out Side Choke Man. Valves Low 250 5min High 3000 10 min Casing 1500 30 Min.
1:30 AM	Test Both Pumps
2:00 AM	Set Wear Ring
6:00 AM	Make Up Dir Tools and Pick up HWDP

Time To	Description
6:00 AM	Rigging Up

# REGULATORY DRILLING SUMMARY



Well : Peter's Point #16-27-12-16      API # : 43-007-31318      Operations Date : 9/6/2007  
Surface Location : SESE-27-12S-16 E 26th PM      Area : West Tavaputs      Report # : 9  
Spud Date : 8/30/2007      Days From Spud : 7      Depth At 06:00 : 5542  
Morning Operations : DRILLING      Estimated Total Depth : 7510

Remarks :  
466 DAYS SINCE LAST LOST TIME ACCIDENT.  
DAILY SAFETY MEETING FIGHTING MUD WEIGHT.  
TUBULARS ON PETERS POINT 16-27 LOCATION.  
342-JOINTS OF 4 1/2" DRILL PIPE.  
40-JOINTS OF 4 1/2" HEAVY WEIGHT DRILL PIPE.  
23-JOINTS OF 6 1/4" DRILL COLLARS.  
1-8" SLICK M.M. S/N 8042 [out] HOURS=60  
1-6 1/2" SLICK M.M. S/N 6333 [out] HOURS=0  
1-6 1/2" A.K.O.M.M. S/N 6202 [out] HOURS=0  
1-6 1/2" A.K.O.M.M. S/N 6169 [IN] HOURS=68  
DIESEL FUEL ON LOCATION=4233 GALLONS.  
DIESEL FUEL USED DAILY=916 GALLONS.  
DIESEL FUEL USED TOTAL=5378 GALLONS.  
WATER USED DAILY=0 BBL.  
WATER USED TOTAL=6210 BBL.

Well : Peter's Point #16-27-12-16      API # : 43-007-31318      Operations Date : 9/5/2007  
Surface Location : SESE-27-12S-16 E 26th PM      Area : West Tavaputs      Report # : 8  
Spud Date : 8/30/2007      Days From Spud : 6      Depth At 06:00 : 4194  
Morning Operations : DRILLING      Estimated Total Depth : 7510

Remarks :  
465 DAYS SINCE LAST LOST TIME ACCIDENT.  
DAILY SAFETY MEETING CLOSE & MUD UP TANKS  
TUBULARS ON PETERS POINT 16-27 LOCATION.  
342-JOINTS OF 4 1/2" DRILL PIPE.  
40-JOINTS OF 4 1/2" HEAVY WEIGHT DRILL PIPE.  
23-JOINTS OF 6 1/4" DRILL COLLARS.  
1-8" SLICK M.M. S/N 8042 [out] HOURS=60  
1-6 1/2" SLICK M.M. S/N 6333 [out] HOURS=0  
1-6 1/2" A.K.O.M.M. S/N 6202 [out] HOURS=0  
1-6 1/2" A.K.O.M.M. S/N 6169 [IN] HOURS=46  
DIESEL FUEL ON LOCATION=5149 GALLONS.  
DIESEL FUEL USED DAILY=917 GALLONS.  
DIESEL FUEL USED TOTAL=4462 GALLONS.  
WATER USED DAILY=1350 BBL.  
WATER USED TOTAL=6210 BBL.

Well : Peter's Point #16-27-12-16      API # : 43-007-31318      Operations Date : 9/4/2007  
Surface Location : SESE-27-12S-16 E 26th PM      Area : West Tavaputs      Report # : 7  
Spud Date : 8/30/2007      Days From Spud : 5      Depth At 06:00 : 2656  
Morning Operations : DRILLING      Estimated Total Depth : 7510

Remarks :  
464 DAYS SINCE LAST LOST TIME ACCIDENT.  
DAILY SAFETY MEETING DRILLING WITH WATER.  
TUBULARS ON PETERS POINT 16-27 LOCATION.  
342-JOINTS OF 4 1/2" DRILL PIPE.  
40-JOINTS OF 4 1/2" HEAVY WEIGHT DRILL PIPE.  
23-JOINTS OF 6 1/4" DRILL COLLARS.  
1-8" SLICK M.M. S/N 8042 [out] HOURS=60  
1-6 1/2" SLICK M.M. S/N 6060 [out] HOURS=29.5  
1-6 1/2" A.K.O. M.M. S/N 6273 [out] HOURS=90.5  
1-6 1/2" A.K.O. M.M. S/N 6169 [IN] HOURS=22.5  
DIESEL FUEL ON LOCATION=6066 GALLONS.  
DIESEL FUEL USED DAILY=683 GALLONS.  
DIESEL FUEL USED TOTAL=3545 GALLONS.  
WATER USED DAILY=160 BBL.  
WATER USED TOTAL=4860 BBL.



**CONFIDENTIAL**

**pason systems usa corp.**

16100 Table Mountain Parkway • Ste. 100 • Golden • CO • 80403  
Telephone (720) 880-2000 • Fax (720) 880-0016  
www.pason.com

43-007-31318

September 12, 2007

Utah Division of Oil, Gas & Mining  
P.O. Box 145801  
Salt Lake City, UT 84114-5801

**RECEIVED**

**SEP 14 2007**

**DIV. OF OIL, GAS & MINING**

**RE: BILL BARRETT CORPORATION  
PETERS POINT 16-27-12-16  
SEC. 27, T12S, R16E  
CARBON COUNTY, UT**

To Whom It May Concern:

Enclosed is the final computer colored log for the above referenced well.

We appreciate the opportunity to be of service to you and look forward to working with you in the near future.

If you have any questions regarding the enclosed data, please contact us.

Sincerely,

Bill Nagel  
Geology Manager  
Pason Systems USA  
BN/alb

Encl: 1 Computer Colored Log.

Cc: Jake Gelfand, Bill Barrett Corp., Denver, CO.

CONFIDENTIAL

COPY

CONFIDENTIAL

Form 3160-5  
(August 2007)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
UTU-008107

6. If Indian, Allottee or Tribe Name

**SUBMIT IN TRIPLICATE - Other instructions on page 2.**

1. Type of Well

Oil Well  Gas Well  Other

7. If Unit of CA/Agreement, Name and/or No.  
PETERS POINT UNIT/UTU-063014

8. Well Name and No.  
PETER'S POINT UNIT FED #16-27-12-16

2. Name of Operator  
BILL BARRETT CORPORATION

9. API Well No.  
43-007-31318

3a. Address  
1099 18TH STREET SUITE 2300, DENVER, COLORADO 80202

3b. Phone No. (include area code)  
303-312-8134

10. Field and Pool or Exploratory Area  
PETER'S POINT/WASATCH-MESAVERDE

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
SESE 1037' FSL, 802' FEL  
SEC. 27, T12S, R16E

11. Country or Parish, State  
CARBON COUNTY, UTAH

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>WEEKLY ACTIVITY REPORT</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

WEEKLY DRILLING ACTIVITY REPORT FROM 09/07/07 - 09/13/07

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed)

TRACEY FALLANG

Title ENVIRONMENTAL/REGULATORY ANALYST

Signature

Date 09/13/2007

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

RECEIVED  
SEP 17 2007

DIV. OF OIL, GAS & MINING

# REGULATORY DRILLING SUMMARY



---

Well : Peter's Point #16-27-12-16      API # : 43-007-31318      Operations Date : 9/8/2007  
Surface Location : SESE-27-12S-16 E 26th PM      Area : West Tavaputs      Report # : 11  
Spud Date : 9/3/2007      Days From Spud : 5      Depth At 06:00 : 6716  
Morning Operations : RUN IN HOLE      Estimated Total Depth : 7571

Remarks :

Time To	Description	Remarks :
10:00 AM	DRILLING FROM 6450 TO 6566	468 DAYS SINCE LAST LOST TIME ACCIDENT.
10:30 AM	LUBRICAYE RIG.BOP DRILL FUNC. P.RAMS	DAILY SAFETY MEETING UNLOADING PRO CSG.
6:00 PM	DRILLING FROM 6566 TO 6716	TUBULARS ON PETERS POINT 16-27 LOCATION.
6:30 PM	CIRCULATE SWEEP AROUND,PUMP DRY SLUG	342-JOINTS OF 4 1/2" DRILL PIPE.
3:30 AM	PULL OUT OF HOLE TIGHT 4400 TO SHOE.	40-JOINTS OF 4 1/2" HEAVY WEIGHT DRILL PIPE.
		23-JOINTS OF 6 1/4" DRILL COLLARS.
		1-8" SLICK M.M. S/N 8042 [out] HOURS=60
		1-6 1/2" SLICK M.M. S/N 6333 [IN] HOURS=0
		1-6 1/2" A.K.O. M.M. S/N 6202 [out] HOURS=0
		1-6 1/2" A.K.O. M.M. S/N 6169 [out] HOURS=103.5
		DIESEL FUEL ON LOCATION=2174 GALLONS.
		DIESEL FUEL USED DAILY=1114 GALLONS.
		DIESEL FUEL USED TOTAL=7437 GALLONS.
		WATER USED DAILY=0 BBL.
		WATER USED TOTAL=6510 BBL.

5:00 AM LAYDOWN DIREC. TOOLS  
6:00 AM L/D M.M. & BIT, P/U M.M. & BIT

---

---

Well : Peter's Point #16-27-12-16      API # : 43-007-31318      Operations Date : 9/7/2007  
Surface Location : SESE-27-12S-16 E 26th PM      Area : West Tavaputs      Report # : 10  
Spud Date : 9/3/2007      Days From Spud : 4      Depth At 06:00 : 6450  
Morning Operations : DRILLING      Estimated Total Depth : 7571

Remarks :

Time To	Description	Remarks :
7:30 AM	DRILLING FROM 5542 TO 5606	467 DAYS SINCE LAST LOST TIME ACCIDENT.
8:00 AM	LUBRICATE RIG,BOP DRILL FUNC. P.RAMS	DAILY SAFETY MEETING CLEAN UP LOCATION.
6:00 AM	DRILLING FROM 5606 TO 6450	TUBULARS ON PETERS POINT 16-27 LOCATION.
		342-JOINTS OF 4 1/2" DRILL PIPE.
		40-JOINTS OF 4 1/2" HEAVY WEIGHT DRILL PIPE.
		23-JOINTS OF 6 1/4" DRILL COLLARS.
		1-8" SLICK M.M. S/N 8042 [out] HOURS=60
		1-6 1/2" SLICK M.M. S/N 6333 [out] HOURS=0
		1-6 1/2" A.K.O. M.M. S/N 6202 [out] HOURS=0
		1-6 1/2" A.K.O. M.M. S/N 6169 [IN] HOURS=91.54
		DIESEL FUEL ON LOCATION=3288 GALLONS.
		DIESEL FUEL USED DAILY=945 GALLONS.
		DIESEL FUEL USED TOTAL=6323 GALLONS
		WATER USED DAILY=300 BBL.
		WATER USED TOTAL=6510 BBL.
		ORDER 2000 P-110,5550 I-100 PRO CSG F/BUNNING TO
		ARRIVE ON FRIDAY WITH
		CASING PREP. CREW@11:00

# REGULATORY DRILLING SUMMARY



Well : Peter's Point #16-27-12-16      API # : 43-007-31318      Operations Date : 9/10/2007  
Surface Location : SESE-27-12S-16 E 26th PM      Area : West Tavaputs      Report # : 13  
Spud Date : 9/3/2007      Days From Spud : 7      Depth At 06:00 : 7571  
Morning Operations : PULL OUT OF HOLE      Estimated Total Depth : 7571

Remarks :

470 DAYS SINCE LAST LOST TIME ACCIDENT.  
DAILY SAFETY MEETING UNBALLING BIT OPERAT.  
TUBULARS ON PETERS POINT 16-27 LOCATION.  
342-JOINTS OF 4 1/2" DRILL PIPE  
40-JOINTS OF 4 1/2" HEAVY WEIGHT DRILL PIPE.  
23-JOINTS OF 6 1/4" DRILL COLLARS.  
1-8" SLICK M.M. S/N 8042 [out] HOURS=60  
1-6 1/2" A.K.O. M.M. S/N 6202 [out] HOURS=0  
1-6 1/2" SLICK M.M. S/N 6333 [IN] HOURS=13.5  
DIESEL FUEL ON LOCATION=4420 GALLONS.  
DIESEL FUEL USED DAILY=1409 GALLONS.  
DIESEL FUEL USED TOTAL=9691 GALLONS.  
WATER USED DAILY=0 BBL.  
WATER USED TOTAL=9320 BBL.

Time To	Description
11:00 AM	DRILLING FROM 7079 TO 7238
11:30 AM	LUBRICATE RIG,BOP DRILL FUNC. P.RAMS
12:30 AM	DRILLING FROM 7238 TO 7571 [TOTAL DEPTH]
1:00 AM	CIRCULATE
2:00 AM	SHORT TRIP 10 STANDS
3:00 AM	CIRCULATE SWEEP AROUND,PUMP DRY SLUG
6:00 AM	P.O.O.H.

Well : Peter's Point #16-27-12-16      API # : 43-007-31318      Operations Date : 9/9/2007  
Surface Location : SESE-27-12S-16 E 26th PM      Area : West Tavaputs      Report # : 12  
Spud Date : 9/3/2007      Days From Spud : 6      Depth At 06:00 : 7079  
Morning Operations : DRILLING      Estimated Total Depth : 7571

Remarks :

469 DAYS SINCE LAST LOST TIME ACCIDENT.  
DAILY SAFETY MEETING PICK UP MUD MOTER.  
TUBULARS ON PETERS POINT 16-27 LOCATION.  
342-JOINTS OF 4 1/2" DRILL PIPE.  
40-JOINTS OF 4 1/2" HEAVY WEIGHT DRILL PIPE.  
23-JOINTS OF 6 1/4" DRILL COLLARS.  
1-8" SLICK M.M. S/N 8042 [out] HOURS=60  
1-6 1/2" A.K.O. M.M. S/N 6169 [out] HOURS=103.5  
1-6 1/2" A.K.O. M.M. S/N 6202 [out] HOURS=0  
1-6 1/2" SLICK M.M. S/N 6333 [IN] HOURS=7.5  
DIESEL FUEL ON LOCATION=5829 GALLONS.  
DIESEL FUEL USED DAILY=845 GALLONS.  
DIESEL FUEL USED TOTAL=8282 GALLONS.  
WATER USED DAILY=2810 BBL.  
WATER USED TOTAL=9320 BBL.

Time To	Description
9:00 AM	RUN IN HOLE WITH FILL@4214 TO 6610
10:00 AM	REAM FROM 6610 TO 6716
3:00 PM	DRILLING FROM 6716 TO 6824
3:30 PM	LUBRICATE RIG,BOP DRILL FUNC.P.RAMS
6:00 AM	DRILLING FROM 6824 TO 7079

# REGULATORY DRILLING SUMMARY



Well : Peter's Point #16-27-12-16      API # : 43-007-31318      Operations Date : 9/12/2007  
Surface Location : SESE-27-12S-16 E 26th PM      Area : West Tavaputs      Report # : 15  
Spud Date : 9/3/2007      Days From Spud : 9      Depth At 06:00 : 7558  
Morning Operations : RIG DOWN      Estimated Total Depth : 7571

Time To	Description
9:30 AM	RUN 172 JTS OF 5 1/2" #17 LTC SET@7558'
10:30 AM	CIRC. R/D CASERS, P.J.S.M. R/U CEMENTERS.
1:30 PM	PRESSURE TEST SURF. LINES TO 5000 PSI PUMP 20 BBL SUPER FLUSH,10 BBL FRESH,338 BBL CMT, 175 BBL DISPLACEMENT,PLUG DOWN AT 13:00 HR. AND FLOAT HELD
2:30 PM	RIG DOWN HALCO
4:00 PM	NIPPLE DOWN
6:00 PM	SET SLIPS @140K [10 OVER] CUT OFF CSG
4:30 AM	CLEAN MUD TANKS,COMPLETE NIPPLE DOWN
6:00 AM	RIG DOWN PREPARE FOR TRUCKS **RIG RELEASED AT 06:00**

Remarks :  
472 DAYS SINCE LAST LOST TIME ACCIDENT.  
DAILY SAFETY MEETING RUNING PRO CSG&CMT.  
TUBULARS ON PETERS POINT 16-27 LOCATION.  
342-JOINTS OF 4 1/2" DRILL PIPE.  
40-JOINTS OF 4 1/2" HEAVY WEIGHT DRILL PIPE.  
23-JOINTS OF 6 1/4" DRILL COLLARS.  
1-8" SLICK M.M. S/N 8042 [out] HOURS=60  
1-6 1/2" SLICK M.M. S/N 6333 [out] HOURS=13.5  
1-6 1/2" A.K.O. M.M. S/N 6202 [out] HOURS=0  
DIESEL FUEL ON LOCATION=++ GALLONS.  
DIESEL FUEL USED DAILY=++ GALLONS.  
DIESEL FUEL USED TOTAL=++ GALLONS.  
WATER USED DAILY=0 BBL.  
WATER USED TOTAL=9710 BBL.  
ran 172 jts 5 1/2" #17 p-110,i-100,1-80 set@7558'  
P.T SURF LINES TO 5K PUMP 20 FLUSH,10 BBL  
FRESH,338 BBL CMT,175 BBL DISPLACE,PLUG  
DOWN@13:00 FLOAT HELD  
\*\*RIG RELEASED 06:00 HR 9-11-2007\*\*

Well : Peter's Point #16-27-12-16      API # : 43-007-31318      Operations Date : 9/11/2007  
Surface Location : SESE-27-12S-16 E 26th PM      Area : West Tavaputs      Report # : 14  
Spud Date : 9/3/2007      Days From Spud : 8      Depth At 06:00 : 7571  
Morning Operations : RUN PRODUCTION CASING      Estimated Total Depth : 7571

Time To	Description
8:00 AM	P.O.O.H. L/D MOTER,BOP DRILL FUNC.B.RAMS
9:00 AM	P.J.S.M. R/U HALCO WIRELINE
1:00 PM	RUN TRIPPLE COMBO LOGS [TD=7552]
2:00 PM	R/D HALCO WIRELINE
6:30 PM	R.I.H. WITH FILL @ 4100
7:00 PM	REAM FROM 7478 TO 7571
8:30 PM	CIRC SWEEP,R/U CASERS,PUMP DRY SLUG
2:00 AM	LAY DOWN DRILL STRING
6:00 AM	R/U AND RUN 5 1/2" PROD. CSG

Remarks :  
471 DAYS SINCE LAST LOST TIME ACCIDENT.  
DAILY SAFETY MEETING WIRELINE OPERATIONS.  
TUBULARS ON PETERS POINT 16-27 LOCATION.  
342-JOINTS OF 4 1/2" DRILL PIPE.  
40-JOINTS OF 4 1/2" HEAVY WEIGHT DRILL PIPE.  
23-JOINTS OF 6 1/4" DRILL COLLARS.  
1-8" SLICK M.M. S/N 8042 [out] HOURS=0  
1-6 1/2" SLICK M.M. S/N 6333 [out] HOURS=13.5  
1-6 1/2" A.K.O. M.M. S/N 6202 [out] HOURS=0  
DIESEL FUEL ON LOCATION=++ GALLONS.  
DIESEL FUEL USED DAILY=++ GALLONS.  
DIESEL FUEL USED TOTAL=9691++ GALLONS.  
WATER USED DAILY=390 BBL.  
WATER USED TOTAL=9710 BBL.  
NOTIFIED BLM REP WILLIS OF TD

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**CONFIDENTIAL**  
**COPY**

BLM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

**SUNDRY NOTICES AND REPORTS ON WELLS**  
**Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.**

5. Lease Serial No.  
UTU-008107  
6. If Indian, Allottee or Tribe Name  
N/A

**SUBMIT IN TRIPLICATE - Other instructions on page 2.**

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		7. If Unit of CA/Agreement, Name and/or No. PETERS POINT UNIT/UTU-063014
2. Name of Operator BILL BARRETT CORPORATION		8. Well Name and No. PETER'S POINT UNIT FED #16-27-12-16
3a. Address 1099 18TH STREET SUITE 2300, DENVER, COLORADO 80202	3b. Phone No. (include area code) 303-312-8134	9. API Well No. 43-007-31318
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) SESE 1037' FSL, 802' FEL SEC. 27, T12S, R16E		10. Field and Pool or Exploratory Area PETER'S POINT/WASATCH-MESAVERDE
		11. Country or Parish, State CARBON COUNTY, UTAH

**12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>WEEKLY ACTIVITY</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<u>REPORT</u>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

WEEKLY COMPLETION ACTIVITY REPORT FROM 10/05/07 - 10/11/07. *FINAL REPORT.*

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed) TRACEY FALLANG		Title ENVIRONMENTAL/REGULATORY ANALYST
Signature <i>Tracey Fallang</i>	Date 10/18/07	

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**RECEIVED**

**OCT 22 2007**

**DIV. OF OIL, GAS & MINING**

# REGULATORY COMPLETION SUMMARY



Well Name : Peter's Point #16-27-12-16

API : 43-007-31318

Area : West Tavaputs

Ops Date : 10/10/2007	Report # : 11	End Time	Description
Summary : SI. Safety meeting. ND/NU. Drill CFPs. land tbg. ND/NU. tree. Pump off bit. flow back. RD WSU. SI.		7:15 AM	Safety Meeting. PU tbg. drilling plugs, ND/NU , Rig down.
		7:30 AM	SICP: 1350 psi blow down casing.
		8:30 AM	TIH tag CFP # 6 @ 5760 ft. no sand. drill out FCP: 500 psi on 2" choke.
		9:30 AM	TIH tag.CFP # 5 @ 6130 ft. drill out no sand.
		10:30 AM	TIH tag CFP: # 4 @ 6660 FT. Drill out CFP: 500 psi no sand.
		11:30 AM	TIH tag CFP: #3 @ 6804 ft. no sand CFP: 450 psi on 2" choke.
		12:29 PM	TIH tag CFP #2 @ 6907 ft. no fill drill out FCP: 500 psi. on 2" choke.
		1:30 PM	TIH ta CFP # 1 @ 7180 ft. no fill on plug. drill out FCP: 500 psi on 2" choke.
		2:30 PM	TIH tag sand fill @ 7445 ft. clean out to 7485 ft. circ hole clean with foam unit.
		3:30 PM	POOH lay down tbg. POOH lay down float valve. TIH land tbg on hanger.
		5:30 PM	ND BOPs. UP X-Mas tree. Pump off bit sub and bit.
		6:00 PM	RD WSU Nabors
		7:00 PM	Turn well over to Production. NO flow lie from tbg. head to production line. Shut in well.

Well Name : Peter's Point #16-27-12-16

API : 43-007-31318

Area : West Tavaputs

Ops Date : 10/9/2007	Report # : 10	End Time	Description
Summary : Safety Meeting. MIRU WSU. EL kill plug. Blowdown casng. ND frac tree / NU BOPs. PU Bit and tbg. Drill CBP & two CFPs. SDFN.		7:00 AM	Safety meeting. Moving rig, EL kill plug ND/NU. PU tbg.
		7:30 AM	MIRU Nabors WSU. Rig Up.
		9:00 AM	Rig up Nabors WSU
		11:00 AM	BWWC EL kill plug @ 4720 ft. POOH RDMO EI.
		11:30 AM	Blow down casing. 950 psi.
		12:30 PM	ND frac tree. NU BOPs. rig work floor
		3:00 PM	PU Smith 4-3/4" tricone bit. Weatherford pumpoff bit sub. 8 ft. tbg sub, XN nipple. one jt. 2-3/8" tbg. X nipple, tally in hole 4,720 ft. 151 jts.
		3:30 PM	PU power swivel, rig foam unit, start foaming wellbore.
		4:15 PM	Drill CBP @ 4720 ft. FCP: 500 psi on 2" choke.
		5:00 PM	TIH tag CFP # 8 @ 4890 ft. Drill out FCP: 500 psi.
		6:00 PM	TIH tag CFP # 7 @ 5360 ft. drill out FCP: 500 psi on 2" choke. no sand.
		6:30 PM	Blow casing clean
		6:30 PM	SI.

Well Name : Peter's Point #16-27-12-16

API : 43-007-31318

Area : West Tavaputs

Ops Date : 10/8/2007	Report # : 9	End Time	Description
Summary : MI set IPS equipment and rig equipment.		11:59 PM	MI Set IPS equipment and rig equipment.

**CONFIDENTIAL**

**tfallang**  
**CONFIDENTIAL**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
ONE NO. 1004-01B  
Expires July 31, 2010  
**COPY**

**WELL COMPLETION OR RECOMPLETION REPORT AND LOG**

5. Lease Serial No.  
UTU-08107

1a. Type of Well  Oil Well  Gas Well  Dry  Other  
b. Type of Completion:  New Well  Work Over  Deepen  Plug Back  Diff. Resrv.,  
Other: \_\_\_\_\_

6. If Indian, Allottee or Tribe Name  
N/A  
7. Unit or CA Agreement Name and No.  
Peter's Point / UTU-063014  
8. Lease Name and Well No.  
Peter's Point Unit Federal 16-27-12-16

2. Name of Operator  
Bill Barrett Corporation

3. Address 1099 18th Street, Suite 2300  
Denver, CO 80202

3a. Phone No. (include area code)  
303-312-8134

9. AFI Well No.  
43-007-31318

4. Location of Well (Report location clearly and in accordance with Federal requirements)\*

At surface SESE, 1037' FSL, 802' FEL

At top prod. interval reported below vertical well

At total depth vertical well

10. Field and Pool or Exploratory  
Peter's Point/Wastach-Mesaverde

11. Sec., T., R., M., on Block and  
Survey or Area  
Sec. 27, T12S-R16E

12. County or Parish  
Carbon County  
13. State  
UT

14. Date Spudded  
08/29/2007

15. Date T.D. Reached  
09/10/2007

16. Date Completed 10/09/2007  
 D & A  Ready to Prod.

17. Elevations (DF, RKB, RT, GL)\*  
7195' GL

18. Total Depth: MD 7571'  
TVD same

19. Plug Back T.D.: MD 7513'  
TVD same

20. Depth Bridge Plug Set: MD N/A  
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)

Triple-Combo, CCL/CBL/GR, Mud-Log SD, DSN, HRI

22. Was well cored?  No  Yes (Submit analysis)  
Was DST run?  No  Yes (Submit report)  
Directional Survey?  No  Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
20"	16" H40	65#	0	40'		grout cement		Surface	
12 1/4"	9 5/8" J55	36#	0	1041'		265 Lt Prem	87 bbls	Surface	
						180 Prem AG30	32 bbls		
8 3/4" & 7 7/8"	5 1/2" N80	17#	0	7558'		1275 50/50 Poz	338 bbls	1270'	

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2 3/8"	6974'							

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Wasatch (inc North Horn)	4801'	6582'	4801' - 4811'	0.43"	30	Open
B) Mesaverde	6735'	7360'	5272' - 5277'	0.43"	15	Open
C)			5624' - 5668'	0.43"	30	Open
D)			6046' - 6056'	0.43"	30	Open

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Depth Interval	Amount and Type of Material
4801' - 4811'	Stage 9: Could not get into zone.
5272' - 5277'	Stage 8: 70% CO2 foam frac: 46 tons CO2; 622 bbls total fluid; 19,245# 20/40 White sand
5624' - 5668'	Stage 7: 70% CO2 foam frac: 130 tons CO2; 1071 bbls total fluid; 32,100# 20/40 White sand
6046' - 6056'	Stage 6: 70% CO2 foam frac: 74 tons CO2; 518 bbls total fluid; 39,900# 20/40 White sand

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
9/28/07	10/14/07	24	→	5.01	2882	0			Flowing
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
22/64"	1200	813	→	5.01	2882	0		Producing	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

\*(See instructions and spaces for additional data on page 2)

**RECEIVED**

OCT 24 2007

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

29. Disposition of Gas (Solid, used for fuel, vented, etc.)

Sold

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
				Wasatch North Horn	3230' 5097'
				Dark Canyon Price River	6712' 6922'
				TD	7571'

32. Additional remarks (include plugging procedure):

Copies of logs were previously submitted under separate cover. In the event log copies were not received, please contact Jim Kinser at 303-312-8163. P-110 casing was run from 5246' to TD.

33. Indicate which items have been attached by placing a check in the appropriate boxes:

- Electrical/Mechanical Logs (1 full set req'd.)     
  Geologic Report     
  DST Report     
  Directional Survey  
 Sundry Notice for plugging and cement verification     
  Core Analysis     
  Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)\*

Name (please print) Tracey Fallang      Title Environmental/Regulatory Analyst  
 Signature *Tracey Fallang*      Date 10/22/07

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**Peter's Point Unit Federal 16-27-12-16 Completion Report Continued**

26. PERFORATION RECORD (cont.)				27. ACID, FRACTURE, TREATMENT, CEMENT SQUEEZE, ETC. (cont.)								
INTERVAL (Top/Bot-MD)		SIZE	NO. HOLES	PERFORATION STATUS	AMOUNT AND TYPE OF MATERIAL							
6563'	6582'	0.43"	30	Open	Stg 5	70% CO2 foam frac:	103	tons CO2	665	bbls total fluid	60,100#	20/40 White Sand
6735'	6773'	0.43"	30	Open	Stg 4	70% CO2 foam frac:	149	tons CO2	806	bbls total fluid	88,000#	20/40 White Sand
6897'	6914'	0.43"	30	Open	Stg 3	70% CO2 foam frac:	91	tons CO2	615	bbls total fluid	50,000#	20/40 White Sand
7086'	7096'	0.43"	30	Open	Stg 2	70% CO2 foam frac:	114	tons CO2	706	bbls total fluid	80,100#	20/40 White Sand
7350'	7360'	0.43"	30	Open	Stg 1	70% CO2 foam frac:	73	tons CO2	496	bbls total fluid	39,800#	20/40 White Sand

\*Depth intervals for frac information same as perforation record intervals.

**tfallang**  
**CONFIDENTIAL**

Form 3160-5  
(August 2007)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires July 31, 2010

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
UTU-008107

6. If Indian, Allottee or Tribe Name  
N/A

**SUBMIT IN TRIPLICATE** - Other instructions on page 2.

7. If Unit of CA/Agreement, Name and/or No.  
Peter's Point Unit / UTU-063014

1. Type of Well  
 Oil Well  Gas Well  Other

8. Well Name and No.  
Peter's Point Unit Federal 16-27-12-16

2. Name of Operator  
Bill Barrett Corporation

9. API Well No.  
43-007-31318

3a. Address  
1099 18th Street, Suite 2500 Denver, CO 80202

3b. Phone No. (include area code)  
303-312-8134

10. Field and Pool or Exploratory Area  
Peter's Point/Wasatch-Mesaverde

4. Location of Well (Footage, Sec., T., R., M. or Survey Description)  
SESE 1037 FSL 802 FEL  
Sec 27 T12S-R16E

11. Country or Parish, State  
Carbon County, UT

**12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>Staging Area</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

This sundry is being submitted to request that this location be utilized as a CO2 supply staging area as BBC completes the Peter's Point 6-34D-12-16 and 2-34D-12-16 (located in the SENW, Sec. 34, T12S-R16E). Completion operations are to be finished on the 6-34D and 2-34D by December 1 and all non-essential equipment would then be removed from this Peter's Point 16-27 location.

If you have any questions or need further information, please contact me at 303-312-8134.

14. I hereby certify that the foregoing is true and correct  
Name (Printed Type): Tracey Fallang Title: Environmental/Regulatory Analyst

Signature: *Tracey Fallang* Date: 10/29/2007

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by: \_\_\_\_\_ Title: \_\_\_\_\_ Date: \_\_\_\_\_

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office: \_\_\_\_\_

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155  
<http://www.blm.gov/ut/st/en.html>



IN REPLY REFER TO  
3180  
UT-922

JUL 16 2008

Bill Barrett Corporation  
Attn: Doug Gundry-White  
1099 18<sup>th</sup> Street, Suite 2300  
Denver, Colorado 80202

Re: 5th Revision Consolidated  
Wasatch-Mesaverde Formation PA "A"  
Peters Point Unit  
Carbon County, Utah

Dear Mr. White:

The 5th Revision of the Consolidated Wasatch-Mesaverde Formation PA "A", Peters Point Unit, CRS No. UTU63014D, AFS No. 891000307D, is hereby approved effective as of October 1, 2007, ★ pursuant to Section 11 of the Peters Point Unit Agreement, Carbon, Utah.

The 5th Revision of the Consolidated Wasatch-Mesaverde Formation PA "A", Peters Point Unit, results in the addition of 480.28 acres to the participating area for a total of 5084.83 acres and is based upon the completion of the following wells as capable of producing unitized substances in paying quantities:

*to 2470*

WELL NO.	API NO.	LOCATION	LEASE NO.
14-26D	43-007-31277	SE¼SW¼,26-12S-16E	UTU0681
16-27	43-007-31318	SE¼SE¼,27-12S-16E	UTU08107
8-34	43-007-31279	SE¼NE¼,34-12S-16E	UTU08107

*16319*

Copies of the approved request are being distributed to the appropriate agencies and one copy is returned herewith. Please advise all interested parties of the establishment of the 5th Revision of the Consolidated Wasatch-Mesaverde Formation PA "A", Peters Point Unit, and the effective date.

Sincerely,

*/s/ Becky J. Hammond*

Becky J. Hammond  
Chief, Branch of Fluid Minerals

Enclosure

*★ See 7/28/08 letter correcting effective date*

RECEIVED  
JUL 28 2008

DIV. OF OIL, GAS & MINING



# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155  
<http://www.blm.gov/ut/st/en.html>



IN REPLY REFER TO  
3180  
UT-922

July 28, 2008

Bill Barrett Corporation  
Attn: Vicki Wambolt  
1099 18<sup>th</sup> Street, Suite 2300  
Denver, Colorado 80202

Re: 5th Revision Consolidated  
Wasatch-Mesaverde Formation PA "A"  
Peters Point Unit  
Carbon County, Utah

Dear Ms. Wambolt:

On July, 16, 2008, the 5<sup>th</sup> Revision to the Consolidated Wasatch-Mesaverde Formation PA "A" was approved. It has come to our attention that the effective date in our approval letter is incorrect. The effective date for the 5<sup>th</sup> Revision to the Consolidated Wasatch-Mesaverde Formation PA "A" is September 1, 2007. Please correct your records to reflect this change.

Sincerely,

*/s/ Becky J. Hammond*

Becky J. Hammond  
Chief, Branch of Fluid Minerals

Enclosure

bcc: Division of Oil, Gas & Mining  
SITLA  
Peters Point Unit w/enclosure  
MMS - Data Management Division w/exhibit (attn: Leona Reilly)  
Field Manager - Moab w/enclosure  
Fluids - Judy  
Fluids - Mickey  
Agr. Sec. Chron.  
Reading File  
Central Files

CSeare:cs (07/28/2008)5<sup>th</sup> rev cons. peters point "A"

RECEIVED  
JUL 31 2008  
DIV. OF OIL, GAS & MINING

STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: Bill Barrett Corporation Operator Account Number: N 2165  
Address: 1099 18th Street, Suite 2300  
city Denver  
state CO zip 80202 Phone Number: (303) 312-8134

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
4300731277	Peter's Point Unit Federal 14-26D-12-16		SESW	26	12S	16E	Carbon
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
C	16220	2470			9/1/2007		
Comments: Revision based on inclusion into Peter's Point participating area. <i>PRRV = WSMVD</i> <i>8/26/08</i>							<b>CONFIDENTIAL</b>

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
4300731318	Peter's Point Unit Federal 16-27-12-16		SESE	27	12S	16E	Carbon
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
C	16319	2470			9/1/2007		
Comments: Revision based on inclusion into Peter's Point participating area. <i>PRRV</i> <i>WSMVD</i> <i>8/26/08</i>							<b>CONFIDENTIAL</b>

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
4300731279	Peter's Point Unit Federal 8-34-12-16		SENE	34	12S	16E	Carbon
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
C	16282	2470			9/1/2007		
Comments: Revision based on inclusion into Peter's Point participating area. <i>PRRV</i> <i>WSMVD</i> <i>8/26/08</i>							<b>CONFIDENTIAL</b>

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Tracey Fallang

Name (Please Print)

Signature

Regulatory Analyst

Title

8/22/2008

Date

RECEIVED

AUG 25 2008

(5/2006)

DIV. OF OIL, GAS & MINING

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

*tfallang*  
**CONFIDENTIAL**

**COPY**  
FORM APPROVED  
OMB No. 1004-0187  
Expires July 31, 2010

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
UTU-008107

6. If Indian, Allottee or Tribe Name  
N/A

**SUBMIT IN TRIPLICATE** – Other instructions on page 2.

1. Type of Well  
 Oil Well     Gas Well     Other

2. Name of Operator  
Bill Barrett Corporation

3a. Address  
1099 18th Street, Suite 2300, Denver, CO 80202

3b. Phone No. (include area code)  
303-312-8134

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
SESE, 1037 FSL, 802 FEL  
Sec. 27, T12S-R16E

7. If Unit of CA/Agreement, Name and/or No.  
Peter's Point Unit / UTU-063014

8. Well Name and No.  
Peter's Point Unit Federal 16-27-12-16

9. API Well No.  
43-007-31318

10. Field and Pool or Exploratory Area  
Peter's Point/Wasatch-Mesaverde

11. Country or Parish, State  
Carbon County, UT

**12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>Pit Closure</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<u>Extension</u>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

This sundry is being submitted to request an extension to the 90-day pit closure/reclamation requirement in the APD COA. BBC plans on adding additional wells to this pad (a list of the wells are attached) and drilling them in November 2008. The pit will be closed after those additional wells are drilled and completed and as weather conditions permit. BBC will ensure that this pit is fenced on all four sides when not in use and that there is sufficient freeboard to account additional precipitation.

For any further questions on this sundry, please contact me at 303-312-8134.

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed)  
Tracey Fallang

Title  
Regulatory Analyst

Signature *Tracey Fallang*

Date  
10/28/2008

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office \_\_\_\_\_

**RECEIVED**

**NOV 03 2008**

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**DIV. OF OIL, GAS & MINING**

**WELL NAME****LEASE**

<b>Peter's Point UF 9-27D-12-16</b>	<b>UTU-08107</b>
<b>Peter's Point UF 15-27D-12-16</b>	<b>UTU-08107</b>
<b>Peter's Point UF 11-27D-12-16</b>	<b>UTU-08107</b>
<b>Peter's Point UF 10-27D-12-16</b>	<b>UTU-08107</b>

trialang  
**CONFIDENTIAL**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

DOG M

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
UTU-008107  
6. If Indian, Allottee or Tribe Name  
N/A

**SUBMIT IN TRIPLICATE** - Other instructions on page 2.

1. Type of Well  
 Oil Well     Gas Well     Other

2. Name of Operator  
Bill Barrett Corporation

3a. Address  
1099 18th Street, Suite 2300, Denver, CO 80202

3b. Phone No. (include area code)  
303-312-8134

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
SESE, 1037' FSL, 802' FEL  
Sec. 27, T12S-R16E

7. If Unit of CA/Agreement, Name and/or No.  
Peter's Point Unit / UTU-063014  
8. Well Name and No.  
Peter's Point Unit Federal 16-27-12-16  
9. API Well No.  
43-007-31318  
10. Field and Pool or Exploratory Area  
Peter's Point/Wasatch-Mesaverde  
11. Country or Parish, State  
Carbon County, UT

**12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Temp SI
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

THIS SUNDRY IS BEING SUBMITTED AS NOTIFICATION THAT THIS WELL HAS TEMPORARILY BEEN SHUT-IN (RETRIEVABLE BRIDGE PLUG (RBP) SET AT 3790'). FOUR NEW DIRECTIONAL WELLS WERE PERMITTED/ADDED TO THIS PAD AND DRILLING HAS BEGUN ON THE FIRST OF THE FOUR WELLS. THE RBP WILL BE REMOVED AFTER DRILLING IS COMPLETED ON ALL FOURS WELLS AND THIS WELL WILL BE TURNED BACK TO SALES.

**COPY SENT TO OPERATOR**

Date: 12-18-2008

Initials: KS

14. I hereby certify that the foregoing is true and correct.  
Name (Printed/Typed)  
Tracey Fallang

Title Regulatory Analyst

Signature Tracey Fallang

Date 11/24/2008

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by D. M. [Signature]

Title Pet. Eng. Date 12/17/08

Office DOG M Federal Approval Of This Action Is Necessary

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**RECEIVED**  
DEC 01 2008  
DIV. OF OIL, GAS & MINING

**tfallang**  
**CONFIDENTIAL**

**COPY** UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

**SUNDRY NOTICES AND REPORTS ON WELLS**  
**Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.**

5. Lease Serial No.  
UTU-008107

6. If Indian, Allottee or Tribe Name  
N/A

**SUBMIT IN TRIPLICATE - Other instructions on page 2.**

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		7. If Unit of CA/Agreement, Name and/or No. Peter's Point Unit / UTU-063014
2. Name of Operator Bill Barrett Corporation		8. Well Name and No. Peter's Point Unit Federal 16-27-12-16
3a. Address 1099 18th Street, Suite 2300, Denver, CO 80202	3b. Phone No. (include area code) 303-312-8134	9. API Well No. 43-007-31318
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) SESE, 1037' FSL, 802' FEL Sec. 27, T12S-R16E		10. Field and Pool or Exploratory Area Peter's Point/Wasatch-Mesaverde
		11. Country or Parish, State Carbon County, UT

**12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>Rev layout / measurement</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

This sundry is being submitted as notification that the facility equipment will change as well as the oil measurement method for this pad. Four additional directional wells were permitted and drilled in 2008. All wells are within the Peter's Point unit and all wells except for the 11-27D are within a Participating Area. The new equipment and measurement for this pad will be as follows:

- (2) 400-bbl production tanks (multiple well)
- (1) 400-bbl production tank (11-27D)
- (1) 400-bbl blowdown tank
- (1) 400-bbl test oil tank

Initial testing would occur as soon as possible after production is established and would be a 1-3 day test to get a baseline for allocation. After the initial test is performed, BBC would move to quarterly testing, testing each well for 7-10 days and rotating through the wells without any downtime between tests. A revised site security diagram will be submitted. The spreadsheet attached indicates all wells in this pad and this sundry is applicable to all wells.

**COPY SENT TO OPERATOR**

Date: 2.5.2009

Initials: KS

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed) Tracey Fallang		Title Regulatory Analyst
Signature <i>Tracey Fallang</i>		Date 01/19/2009

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by <i>D. M. [Signature]</i>	Title Pet. Eng.	Date 2/4/09
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Federal Approval Of This Action Is Necessary
Office Doom		

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**RECEIVED**

**JAN 26 2009**

Peter's Point Unit / UTU-63014

WELL NAME	FIELD	COUNTY	QTR/QTR	SEC	TWN-RNG	FOOTAGE CALLS			LEASE #	
PETER'S POINT U FED 16-27-12-16	PETER'S POINT	CARBON	SESE	27	12S-16E	1049	S	813	E	UTU-08107
PETER'S POINT U FED 9-27D-12-16	PETER'S POINT	CARBON	SESE	27	12S-16E	1050	S	790	E	UTU-08107
PETER'S POINT U FED 15-27D-12-1	PETER'S POINT	CARBON	SESE	27	12S-16E	1063	S	799	E	UTU-08107
PETER'S POINT U FED 11-27D-12-1	PETER'S POINT	CARBON	SESE	27	12S-16E	1075	S	809	E	UTU-08107
PETER'S POINT U FED 10-27D-12-1	PETER'S POINT	CARBON	SESE	27	12S-16E	1088	S	819	E	UTU-08107

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**COPY**

5. Lease Serial No.  
see attached

6. If Indian, Allottee or Tribe Name  
N/A

**SUBMIT IN TRIPLICATE - Other instructions on page 2.**

1. Type of Well

Oil Well  Gas Well  Other

7. If Unit of CA/Agreement, Name and/or No.  
Peter's Point/UTU-63014

8. Well Name and No.

see attached PPU Fed 16-27-12-16

9. API Well No.

43 057 31318

2. Name of Operator  
Bill Barrett Corporation

3a. Address  
1099 18th Street, Suite 2300  
Denver, CO 80202

3b. Phone No. (include area code)  
303-312-8134

10. Field and Pool or Exploratory Area  
Peter's Point/Wasatch-Mesaverde

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
see attached

12S 16E 27

11. Country or Parish, State  
Carbon County, UT

**12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Revised layout and measurement
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

This sundy is being submitted as a follow up to clarify testing/allocation methods for the attached wells.

Initial testing would occur (or has occurred) as soon as possible after production is established and would be a 1-3 day test to get a baseline for allocation. After the initial test is performed, BBC would move to quarterly testing, testing each well for 7-10 days and rotating through the wells without any downtime between tests. Revised site security diagrams will be submitted as wells are completed.

COPY SENT TO OPERATOR

Date: 2.24.2009

Initials: KS

14. I hereby certify that the foregoing is true and correct.  
Name (Printed/Typed)

Tracey Fallang

Title Regulatory Analyst

Signature

*Tracey Fallang*

Date 02/10/2009

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by

*[Signature]*

Title

Reg. Eng.

Date

2/17/09

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

DOGm

Federal Approval of This  
Action Is Necessary

**RECEIVED**

**FEB 12 2009**

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

DIV. OF OIL, GAS & MINING

WELL NAME	FIELD	COUNTY	QTR/QTR	SEC	TWN-RNG	FOOTAGE CALLS			LEASE #	# OF TANKS	
PETERS POINT U FED 3-36-12-16	PETER'S POINT	CARBON	NENW	36	12S-16E	572	N	2184	W	UTU-04049	(2) Multiple Well Prod Tank (1) Prod Tank (15-25D) (1) Test Tank (1) Blowdown Tank
PETERS POINT U FED 4-36D-12-16	PETER'S POINT	CARBON	NENW	36	12S-16E	617	N	2202	W	UTU-04049	
PETERS POINT U FED 15-25D-12-16	PETER'S POINT	CARBON	NENW	36	12S-16E	602	N	2195	W	UTU-0681	
PETERS POINT U FED 13-25D-12-16	PETER'S POINT	CARBON	NENW	36	12S-16E	588	N	2189	W	UTU-0681	(4) Multiple Well Prod Tanks (1) Test Tank (1) Blowdown Tank
PETERS POINT U FED 14-26D-12-16	PETER'S POINT	CARBON	SESW	26	12S-16E	225	S	1522	W	UTU-0681	
PETERS POINT U FED 3-35D-12-16	PETER'S POINT	CARBON	SESW	26	12S-16E	208	S	1527	W	JTSL-07159	
PETERS POINT U FED 15-26D-12-16	PETER'S POINT	CARBON	SESW	26	12S-16E	239	S	1518	W	UTU-0681	
PETERS POINT U FED 13-26D-12-16	PETER'S POINT	CARBON	SESW	26	12S-16E	254	S	1514	W	UTU-0681	
PETERS POINT U FED 10-26D-12-16	PETER'S POINT	CARBON	SESW	26	12S-16E	270	S	1510	W	UTU-0681	
PETERS POINT U FED 11-26D-12-16	PETER'S POINT	CARBON	SESW	26	12S-16E	285	S	1506	W	UTU-0681	
PETERS POINT U FED 12-26D-12-16	PETER'S POINT	CARBON	SESW	26	12S-16E	301	S	1502	W	UTU-0681	
PETERS POINT U FED 6-35D-12-16	PETER'S POINT	CARBON	SESW	26	12S-16E	301	S	1502	W	UTU-0681	(3) Multiple Well Prod Tanks (1) Test Tank (1) Blowdown Tank
PETERS POINT U FED 2-35D-12-16	PETER'S POINT	CARBON	SESW	26	12S-16E	301	S	1502	W	UTU-0681	
PETERS POINT U FED 1-35D-12-16	PETER'S POINT	CARBON	SESW	26	12S-16E	301	S	1502	W	UTU-0681	
PETERS POINT U FED 7-35D-12-16	PETER'S POINT	CARBON	SESW	26	12S-16E	301	S	1502	W	UTU-0681	
PETERS POINT U FED 4-35D-12-16	PETER'S POINT	CARBON	SESW	26	12S-16E	301	S	1502	W	UTU-0681	
PETER'S POINT U FED 16-27-12-16	PETER'S POINT	CARBON	SESE	27	12S-16E	1049	S	813	E	UTU-08107	(2) Multiple Well Prod Tanks (1) Prod Tank (11-27D) (1) Test Tank (1) Blowdown Tank
PETER'S POINT U FED 9-27D-12-16	PETER'S POINT	CARBON	SESE	27	12S-16E	1050	S	790	E	UTU-08107	
PETER'S POINT U FED 15-27D-12-16	PETER'S POINT	CARBON	SESE	27	12S-16E	1063	S	799	E	UTU-08107	
PETER'S POINT U FED 11-27D-12-16	PETER'S POINT	CARBON	SESE	27	12S-16E	1075	S	809	E	UTU-08107	
PETER'S POINT U FED 10-27D-12-16	PETER'S POINT	CARBON	SESE	27	12S-16E	1088	S	819	E	UTU-08107	

**tfallang**  
**CONFIDENTIAL**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

**COPY**

**SUNDRY NOTICES AND REPORTS ON WELLS**  
**Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.**

5. Lease Serial No.  
UTU-008107

6. If Indian, Allottee or Tribe Name  
N/A

**SUBMIT IN TRIPLICATE – Other instructions on page 2.**

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		7. If Unit of CA/Agreement, Name and/or No. Peter's Point Unit / UTU-063014
2. Name of Operator Bill Barrett Corporation		8. Well Name and No. Peter's Point Unit Federal 16-27-12-16
3a. Address 1099 18th Street, Suite 2300, Denver, CO 80202	3b. Phone No. (include area code) 303-312-8134	9. API Well No. 43-007-31318
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) SESE, 1037' FSL, 802' FEL Sec. 27, T12S-R16E		10. Field and Pool or Exploratory Area Peter's Point/Wasatch-Mesaverde
		11. Country or Parish, State Carbon County, UT

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Pit Evaporation
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Method _____
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	_____

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

This sundry is being submitted as notification that BBC will utilize enhanced evaporation methods to evaporate the contents of the reserve pit. The evaporation system consists of a portable pump with a suction hose and a discharge line fitted with sprinkler nozzles. The pump is set to detect wind speed and to shut the system down if wind speed exceeds 10 mph. Non-permeable overspray walls are placed around the perimeter to prevent spray drift. Evaporation operations are performed by a third party contractor and observed on a daily basis.

If you have any questions or need further information, please contact me at 303-312-8134.

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed) Tracey Fallang		Title Regulatory Analyst
Signature <i>Tracey Fallang</i>		Date 05/26/2009

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**RECEIVED**

**JUN 01 2009**

**DIV. OF OIL, GAS & MINING**

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU-008107
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b> PETERS POINT
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> PPU FED 16-27-12-16
<b>2. NAME OF OPERATOR:</b> BILL BARRETT CORP	<b>9. API NUMBER:</b> 43007313180000
<b>3. ADDRESS OF OPERATOR:</b> 1099 18th Street Ste 2300 , Denver, CO, 80202	<b>PHONE NUMBER:</b> 303 312-8128 Ext
<b>4. LOCATION OF WELL FOOTAGES AT SURFACE:</b> 1037 FSL 0802 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SESE Section: 27 Township: 12.0S Range: 16.0E Meridian: S	<b>9. FIELD and POOL or WILDCAT:</b> PETER'S POINT  <b>COUNTY:</b> CARBON  <b>STATE:</b> UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 7/29/2009	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input checked="" type="checkbox"/> OTHER	OTHER: <input type="text" value="Change in flow mechan"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

This sundry is being submitted as notification of a workover performed to enhance production. Details of the work performed are attached.

Accepted by the  
 Utah Division of  
 Oil, Gas and Mining  
**FOR RECORD ONLY**  
 August 19, 2009

<b>NAME (PLEASE PRINT)</b> Tracey Fallang	<b>PHONE NUMBER</b> 303 312-8134	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A	<b>DATE</b> 8/18/2009	

## WORKOVER COMPLETED

- 1.) MIRU PU & bleed casing off thru flare
- 2.) NU BOP's
- 3.) PUMU pump out aluminum plug, +/- 1,314' of 3.5" Ultraflush tubing, change over to 2 3/8 tubing
- 4.) MIRU NALCO One Source capillary tbg unit & run capillary inside ultra flush
- 5.) MU & TIH w/XN nipple, CVR sleeve, X- nipple
- 6.) Continue TIH w/ 6,046' 2-3/8" tbg with capillary string banded to outside of tbg
- 7.) PUMU modified tbg hanger & hook capillary string into hanger
- 8.) Continue TIH & land in tbg in tbg hanger
- 9.) N/D bop N/U well head w/ isolation nipple between donut & B2 adapter flange on bottom of tree
- 10.) RU N2 foam unit & pump off bit sub. Continue foaming down tbg up backside for 2 hours to evacuate all liquids
- 11.) MIRU SL unit, RIH & pull CVR sleeve
- 12.) RIH & set XN-plug
- 13.) RDMOL flowing well up tbg to sales

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU-008107
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b> PETERS POINT
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> PPU FED 16-27-12-16
<b>2. NAME OF OPERATOR:</b> BILL BARRETT CORP	<b>9. API NUMBER:</b> 43007313180000
<b>3. ADDRESS OF OPERATOR:</b> 1099 18th Street Ste 2300 , Denver, CO, 80202	<b>PHONE NUMBER:</b> 303 312-8164 Ext
<b>4. LOCATION OF WELL FOOTAGES AT SURFACE:</b> 1037 FSL 0802 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SESE Section: 27 Township: 12.0S Range: 16.0E Meridian: S	<b>9. FIELD and POOL or WILDCAT:</b> PETER'S POINT  <b>COUNTY:</b> CARBON  <b>STATE:</b> UTAH

**11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 6/8/2010	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input checked="" type="checkbox"/> OTHER	OTHER: Workover-wellbore clea

**12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.**

This sundry is being submitted as notification that Bill Barrett Corporation will move to this location to perform a workover in an attempt to enhance production. The workover procedure is attached. If you have any questions or need further information, please call me at 303-312-8134.

**Accepted by the Utah Division of Oil, Gas and Mining**

Date: June 09, 2010

By: *Don K. [Signature]*

<b>NAME (PLEASE PRINT)</b> Tracey Fallang	<b>PHONE NUMBER</b> 303 312-8134	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A		<b>DATE</b> 6/7/2010

**WORKOVER PROCEDURE**  
**Peters Point 16-27-12-16**  
**Wellbore Cleanout**

\*It is imperative that as little fluid as possible is pumped on this well while performing this procedure.

3-1/2" Ultra Flush Est – 1,000'

2-3/8" EUE Est – 5,800'

- 1.) MIRU PU & bleed casing off thru flare
- 2.) NU BOP's
- 3.) MUPU 2-3/8" tbg & TOOH w/ 4 jts 2-3/8" tbg.
  - a. Report findings to Chris Bairrington – BBC Denver 303-312-8511 as it is currently reported that the existing tbg string is stuck in the hole due to sand production.

**If tbg string is stuck WO orders for fishing.**

- 4.) Reland existing tbg string at same
- 5.) MIRU Slickline unit & attempt to fish XN plug @ 6,046' +/-, and install CVR Flow sub sleeve.
- 6.) RU foam unit & flow well around to unload any sand & water from the annulus.
- 7.) Immediately MIRU SL unit, RIH & pull CVR sleeve (same day as foam unit evacuates the backside)
- 8.) RIH & set XN-plug
- 9.) RDMOL flowing well up tbg to sales

Division of Oil, Gas and Mining  
**OPERATOR CHANGE WORKSHEET (for state use only)**

**ROUTING**  
 CDW

**X - Change of Operator (Well Sold)**

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective: 1/1/2014

<b>FROM:</b> (Old Operator): N2165-Bill Barrett Corporation 1099 18th Street, Suite 230 Denver, CO 80202  Phone: 1 (303) 312-8134	<b>TO:</b> ( New Operator): N4040-EnerVest Operating, LLC 1001 Fannin Street, Suite 800 Houston, TX 77002  Phone: 1 (713) 659-3500
--	---

CA No.		Unit:		Peter Point				
WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
See Attached List								

**OPERATOR CHANGES DOCUMENTATION**

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 1/7/2014
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 1/7/2014
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 1/28/2014
- a. Is the new operator registered in the State of Utah: \_\_\_\_\_ Business Number: 8850806-0161
- 5a. (R649-9-2)Waste Management Plan has been received on: Not Yet
- 5b. Inspections of LA PA state/fee well sites complete on: Yes
- 5c. Reports current for Production/Disposition & Sundries on: 1/24/2014
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM Not Yet BIA N/A
- Federal and Indian Units:**  
 The BLM or BIA has approved the successor of unit operator for wells listed on: Not Yet
- Federal and Indian Communization Agreements ("CA"):**  
 The BLM or BIA has approved the operator for all wells listed within a CA on: N/A
- Underground Injection Control ("UIC")** Division has approved UIC Form 5 Transfer of Authority to **Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: Yes

**DATA ENTRY:**

- Changes entered in the **Oil and Gas Database** on: 1/28/2014
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 1/28/2014
- Bond information entered in RBDMS on: 1/28/2014
- Fee/State wells attached to bond in RBDMS on: 1/28/2014
- Injection Projects to new operator in RBDMS on: 1/28/2014
- Receipt of Acceptance of Drilling Procedures for APD/New on: 1/7/2014
- Surface Agreement Sundry from **NEW** operator on Fee Surface wells received on: 1/7/2014

**BOND VERIFICATION:**

- Federal well(s) covered by Bond Number: RLB7886
- Indian well(s) covered by Bond Number: RLB7886
- a. (R649-3-1) The **NEW** operator of any state/fee well(s) listed covered by Bond Number B008371
- b. The **FORMER** operator has requested a release of liability from their bond on: N/A

**LEASE INTEREST OWNER NOTIFICATION:**

- (R649-2-10) The **NEW** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 1/28/2014

**COMMENTS:**

## Bill Barrett Corporation (N2165) to EnerVest Operating, LLC (N4040)

Effective 1/1/2014

## Peter Point Unit

Well Name	Sec	TWN	RNG	API Number	Entity	Mineral Lease	Surface Lease	Well Type	Well Status
PPU FED 11-34D-12-16	34	120S	160E	4300731465		Federal	Federal	GW	APD
PPU FED 10-34D-12-16	34	120S	160E	4300731469		Federal	Federal	GW	APD
PETERS POINT UF 15X-36D-12-16	36	120S	160E	4300750178		Federal	Federal	GW	APD
PETERS POINT UF 10-1D-13-16	36	120S	160E	4300750182		Federal	Federal	GW	APD
PETERS POINT UF 9-1D-13-16	36	120S	160E	4300750183		Federal	Federal	GW	APD
PPU FED 9-34D-12-16	34	120S	160E	4300731430	17225	Federal	Federal	GW	OPS
PPU FED 15-35D-12-16	35	120S	160E	4300731475	2470	Federal	Federal	GW	OPS
PETERS POINT U FED 12A-6D-13-17	31	120S	170E	4300750034	2470	Federal	Federal	GW	OPS
PETERS POINT U FED 11A-31D-12-17	31	120S	170E	4300750036	2470	Federal	Federal	GW	OPS
PETERS POINT U FED 9-6D-13-17	6	130S	170E	4300750120	2470	Federal	Federal	GW	OPS
PETERS POINT U FED 14-6D-13-17	6	130S	170E	4300750121	2470	Federal	Federal	GW	OPS
PETERS POINT U FED 15-6D-13-17	6	130S	170E	4300750122	2470	Federal	Federal	GW	OPS
PETERS POINT UF 2-7D-13-17	6	130S	170E	4300750149	2470	Federal	Federal	GW	OPS
PETERS POINT UF 1-7D-13-17	6	130S	170E	4300750150	2470	Federal	Federal	GW	OPS
PETERS POINT U FED 36-2	36	120S	160E	4300730761	2470	Federal	Federal	GW	P
PETERS POINT U FED 36-3	36	120S	160E	4300730762	2470	Federal	Federal	GW	P
PETERS POINT U FED 36-4	36	120S	160E	4300730763	2470	Federal	Federal	GW	P
PETERS POINT U FED 14-25D-12-16	36	120S	160E	4300730764	2470	Federal	Federal	GW	P
PETERS POINT U FED 4-31D-12-17	36	120S	160E	4300730810	2470	Federal	Federal	GW	P
PETERS POINT U FED 16-26D-12-16	36	120S	160E	4300730812	2470	Federal	Federal	GW	P
PETERS POINT U FED 6-7D-13-17	6	130S	170E	4300730859	14692	Federal	Federal	GW	P
PETERS POINT U FED 16-35	35	120S	160E	4300730965	2470	Federal	Federal	GW	P
PETERS POINT U FED 11-6-13-17	6	130S	170E	4300730982	2470	Federal	Federal	GW	P
PETERS POINT U FED 16-6D-13-17	6	130S	170E	4300731004	2470	Federal	Federal	GW	P
PETERS POINT U FED 16-31D-12-17	6	130S	170E	4300731005	2470	Federal	Federal	GW	P
PETERS POINT U FED 12-31D-12-17	36	120S	160E	4300731009	2470	Federal	Federal	GW	P
PETERS POINT U FED 2-36D-12-16	36	120S	160E	4300731010	2470	Federal	Federal	GW	P
PETERS POINT U FED 9-36-12-16	36	120S	160E	4300731011	2470	Federal	Federal	GW	P
PETERS POINT U FED 8-35D-12-16	36	120S	160E	4300731024	2470	Federal	Federal	GW	P
PETERS POINT U FED 4-12D-13-16	2	130S	160E	4300731049	14692	Federal	State	GW	P
PETERS POINT U FED 2-12D-13-16	6	130S	170E	4300731158	14692	Federal	Federal	GW	P
PETERS POINT U FED 10-36D-12-16	36	120S	160E	4300731174	2470	Federal	Federal	GW	P
PETERS POINT U FED 12-36D-12-16	36	120S	160E	4300731175	2470	Federal	Federal	GW	P
PPU FED 15-6D-13-17	6	130S	170E	4300731261	16103	Federal	Federal	GW	P
PP UF 3-36-12-16	36	120S	160E	4300731271	2470	Federal	Federal	GW	P
PP UF 6-36-12-16	36	120S	160E	4300731272	2470	Federal	Federal	GW	P
PPU FED 6-35D-12-16	35	120S	160E	4300731275	2470	Federal	Federal	GW	P
PPU FED 8-34-12-16	34	120S	160E	4300731279	2470	Federal	Federal	GW	P
PPU FED 6-34D-12-16	34	120S	160E	4300731281	2470	Federal	Federal	GW	P
PPU FED 7-1D-13-16 ULTRA DEEP	6	130S	170E	4300731293	14692	Federal	Federal	GW	P
PPU FED 16-27-12-16	27	120S	160E	4300731318	2470	Federal	Federal	GW	P
PPU FED 10-27D-12-16	27	120S	160E	4300731319	2470	Federal	Federal	GW	P
PPU FED 2-34D-12-16	34	120S	160E	4300731320	2470	Federal	Federal	GW	P
PPU FED 2-7D-13-17 DEEP	6	130S	170E	4300731326	14692	Federal	Federal	GW	P
PPU FED 2-35D-12-16	35	120S	160E	4300731345	2470	Federal	Federal	GW	P
PPU FED 7-35D-12-16	35	120S	160E	4300731346	2470	Federal	Federal	GW	P
PPU FED 4-35D-12-16	35	120S	160E	4300731347	2470	Federal	Federal	GW	P
PPU FED 7-36D-12-16	36	120S	160E	4300731348	2470	Federal	Federal	GW	P
PPU FED 11-36D-12-16	36	120S	160E	4300731349	2470	Federal	Federal	GW	P
PPU FED 15-25D-12-16	36	120S	160E	4300731351	2470	Federal	Federal	GW	P
PPU FED 13-25D-12-16	36	120S	160E	4300731352	2470	Federal	Federal	GW	P
PPU FED 4-36D-12-16	36	120S	160E	4300731353	2470	Federal	Federal	GW	P
PPU FED 1-35D-12-16	35	120S	160E	4300731365	2470	Federal	Federal	GW	P
PPU FED 13-26D-12-16	26	120S	160E	4300731403	2470	Federal	Federal	GW	P
PPU FED 15-26D-12-16	26	120S	160E	4300731404	2470	Federal	Federal	GW	P
PPU FED 3-35D-12-16	26	120S	160E	4300731405	2470	Federal	Federal	GW	P

Bill Barrett Corporation (N2165) to EnerVest Operating, LLC (N4040)

Effective 1/1/2014

Peter Point Unit

Well Name	Sec	TWN	RNG	API Number	Entity	Mineral Lease	Surface Lease	Well Type	Well Status
PPU FED 10-26D-12-16	26	120S	160E	4300731406	2470	Federal	Federal	GW	P
PPU FED 11-26D-12-16	26	120S	160E	4300731407	2470	Federal	Federal	GW	P
PPU FED 12-26D-12-16	26	120S	160E	4300731408	2470	Federal	Federal	GW	P
PPU FED 11-27D-12-16	27	120S	160E	4300731409	2470	Federal	Federal	GW	P
PPU FED 15-27D-12-16	27	120S	160E	4300731410	2470	Federal	Federal	GW	P
PPU FED 9-27D-12-16	27	120S	160E	4300731411	2470	Federal	Federal	GW	P
PPU FED 1-34D-12-16	34	120S	160E	4300731427	2470	Federal	Federal	GW	P
PPU FED 7-34D-12-16	34	120S	160E	4300731428	2470	Federal	Federal	GW	P
PPU FED 5-35D-12-16	34	120S	160E	4300731429	2470	Federal	Federal	GW	P
PPU FED 3-34D-12-16	34	120S	160E	4300731466	2470	Federal	Federal	GW	P
PPU FED 5-34D-12-16	34	120S	160E	4300731467	2470	Federal	Federal	GW	P
PPU FED 4-34D-12-16	34	120S	160E	4300731468	2470	Federal	Federal	GW	P
PPU FED 10-35D-12-16	35	120S	160E	4300731474	2470	Federal	Federal	GW	P
PPU FED 9-35D-12-16	35	120S	160E	4300731476	2470	Federal	Federal	GW	P
PETERS POINT U FED 9-26D-12-16	25	120S	160E	4300750021	2470	Federal	Federal	GW	P
PETERS POINT U FED 11-25D-12-16	25	120S	160E	4300750022	2470	Federal	Federal	GW	P
PETERS POINT U FED 10-31D-12-17	31	120S	170E	4300750023	2470	Federal	Federal	GW	P
PETERS POINT U FED 11-31D-12-17	31	120S	170E	4300750024	2470	Federal	Federal	GW	P
PETERS POINT U FED 13A-31D-12-17	31	120S	170E	4300750025	2470	Federal	Federal	GW	P
PETERS POINT U FED 13-31D-12-17	31	120S	170E	4300750026	2470	Federal	Federal	GW	P
PETERS POINT U FED 14-31D-12-17	31	120S	170E	4300750027	2470	Federal	Federal	GW	P
PETERS POINT U FED 14A-31D-12-17	31	120S	170E	4300750028	2470	Federal	Federal	GW	P
PETERS POINT U FED 12-25D-12-16	25	120S	160E	4300750029	2470	Federal	Federal	GW	P
PETERS POINT U FED 12-6D-13-17	31	120S	170E	4300750033	2470	Federal	Federal	GW	P
PETERS POINT U FED 10-25D-12-16	25	120S	160E	4300750035	2470	Federal	Federal	GW	P
PETERS POINT U FED 13-36D-12-16	36	120S	160E	4300750037	2470	Federal	Federal	GW	P
PETERS POINT U FED 15-36D-12-16	36	120S	160E	4300750038	2470	Federal	Federal	GW	P
PETERS POINT U FED 11-1D-13-16	36	120S	160E	4300750039	2470	Federal	Federal	GW	P
PETERS POINT U FED 12-1D-13-16	36	120S	160E	4300750040	2470	Federal	Federal	GW	P
PETERS POINT U FED 3A-34D-12-16	27	120S	160E	4300750063	2470	Federal	Federal	GW	P
PETERS POINT U FED 4A-34D-12-16	27	120S	160E	4300750064	2470	Federal	Federal	GW	P
PETERS POINT U FED 12-27D-12-16	27	120S	160E	4300750065	2470	Federal	Federal	GW	P
PETERS POINT U FED 13-27D-12-16	27	120S	160E	4300750066	2470	Federal	Federal	GW	P
PETERS POINT U FED 13A-27D-12-16	27	120S	160E	4300750067	2470	Federal	Federal	GW	P
PETERS POINT U FED 14A-27D-12-16	27	120S	160E	4300750069	2470	Federal	Federal	GW	P
PETERS POINT U FED 5-31D-12-17	36	120S	160E	4300750109	2470	Federal	Federal	GW	P
PETERS POINT U FED 6-31D-12-17	36	120S	160E	4300750116	2470	Federal	Federal	GW	P
PETERS POINT U FED 9X-36D-12-16	36	120S	160E	4300750117	2470	Federal	Federal	GW	P
PETERS POINT U FED 1-36D-12-16	36	120S	160E	4300750118	2470	Federal	Federal	GW	P
PETERS POINT U FED 10-6D-13-17	6	130S	170E	4300750119	2470	Federal	Federal	GW	P
PETERS POINT U FED 15-31D-12-17	6	130S	170E	4300750123	2470	Federal	Federal	GW	P
PETERS POINT UF 12-5D-13-17	6	130S	170E	4300750151	2470	Federal	Federal	GW	P
PETERS POINT UF 13-5D-13-17	6	130S	170E	4300750152	2470	Federal	Federal	GW	P
PETERS POINT UF 13-30D-12-17	30	120S	170E	4300750153	18347	Federal	Federal	GW	P
PETERS POINT UF 14-30D-12-17	30	120S	170E	4300750154	18350	Federal	Federal	GW	P
PETERS POINT UF 12-30D-12-17	30	120S	170E	4300750155	18346	Federal	Federal	GW	P
PETERS POINT UF 11-30D-12-17	30	120S	170E	4300750156	18348	Federal	Federal	GW	P
PETERS POINT UF 3-31D-12-17	30	120S	170E	4300750157	2470	Federal	Federal	GW	P
PETERS POINT UF 2-31D-12-17	30	120S	170E	4300750158	18349	Federal	Federal	GW	P
PETERS POINT UF 16-25D-12-16	30	120S	170E	4300750159	2470	Federal	Federal	GW	P
PETERS POINT UF 9-25D-12-16	30	120S	170E	4300750160	2470	Federal	Federal	GW	P
PETERS POINT UF 7X-36D-12-16	36	120S	160E	4300750231	2470	Federal	Federal	GW	P
PETERS POINT UF 8-36D-12-16	36	120S	160E	4300750232	2470	Federal	Federal	GW	P
PPU FED 14-26D-12-16	26	120S	160E	4300731277	2470	Federal	Federal	GW	S
PPU FED 5-36D-12-16	36	120S	160E	4300731350	2470	Federal	Federal	GW	S

COPY

STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:  
(see attached well list)

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:  
N/A

7. UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL  
OIL WELL  GAS WELL  OTHER \_\_\_\_\_

8. WELL NAME and NUMBER:  
(see attached well list)

2. NAME OF OPERATOR:  
ENERVEST OPERATING, LLC

9. API NUMBER:

3. ADDRESS OF OPERATOR:  
1001 FANNIN, ST. STE 800 CITY HOUSTON STATE TX ZIP 77002

PHONE NUMBER:  
(713) 659-3500

10. FIELD AND POOL, OR WILDCAT:

4. LOCATION OF WELL

FOOTAGES AT SURFACE: (see attached well list)

COUNTY:

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:

STATE:  
UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: <u>1/1/2014</u>	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

ENERVEST OPERATING, LLC IS SUBMITTING THIS SUNDRY AS NOTIFICATION THAT THE WELLS LISTED ON THE ATTACHED LIST HAVE BEEN SOLD TO ENERVEST OPERATING, LLC BY BILL BARRETT CORPORATION EFFECTIVE 1/1/2014. PLEASE REFER ALL FUTURE CORRESPONDENCE TO THE ADDRESS BELOW.

EnerVest Operating, L.L.C.  
1001 Fannin, Suite 800  
Houston, Texas 77002  
713-659-3500

(BLM BOND # RLB 7886, STATE/FEE BOND # B008371)

BILL BARRETT CORPORATION

Duane Zavadil NAME (PLEASE PRINT)

Duane Zavadil SIGNATURE

Senior Vice President -  
EH&S, Government and Regulatory Affairs

N2115

ENERVEST OPERATING, LLC

RONNIE L YOUNG NAME (PLEASE PRINT)

Ronnie L Young SIGNATURE  
DIRECTOR - REGULATORY

N4040

NAME (PLEASE PRINT) RONNIE YOUNG

SIGNATURE Ronnie L Young

TITLE DIRECTOR - REGULATORY

DATE 12/10/2013

(This space for State use only)

APPROVED

JAN 28 2014 4:00 PM

DIV. OIL GAS & MINING

Rachel Medina

(See Instructions on Reverse Side)

RECEIVED

JAN 07 2014

DIV. OF OIL, GAS & MINING

UDOGM CHANGE OF OPERATOR WELL LIST

Well Name	Sec	TWN	RNG	API Number	Entity	Lease	Well Type	Well Status	Unit
JACK CANYON UNIT 8-32	32	120S	160E	4300730460	15167	State	WI	A	
JACK CYN U ST 14-32	32	120S	160E	4300730913	15166	State	WD	A	
PRICKLY PEAR U FED 12-24	24	120S	140E	4300730953	14467	Federal	WD	A	
PPU FED 11-23D-12-15	23	120S	150E	4300731440		Federal	GW	APD	PRICKLY PEAR
PPU FED 4-26D-12-15	23	120S	150E	4300731441		Federal	GW	APD	PRICKLY PEAR
PPU FED 14-23D-12-15	23	120S	150E	4300731442		Federal	GW	APD	PRICKLY PEAR
PPU FED 12-23D-12-15	23	120S	150E	4300731443		Federal	GW	APD	PRICKLY PEAR
PPU FED 11-34D-12-16	34	120S	160E	4300731465		Federal	GW	APD	PETERS POINT
PPU FED 10-34D-12-16	34	120S	160E	4300731469		Federal	GW	APD	PETERS POINT
HORSE BENCH FED 4-27D-12-16	27	120S	160E	4300750092		Federal	GW	APD	
HORSE BENCH FED 5-27D-12-16	27	120S	160E	4300750093		Federal	GW	APD	
PRICKLY PEAR U FED 12-7D-12-15	07	120S	150E	4300750094		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR U FED 11-7D-12-15	07	120S	150E	4300750095		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR U FED 13-7D-12-15	07	120S	150E	4300750096		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR U FED 14-7D-12-15	07	120S	150E	4300750097		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 11-8D-12-15	08	120S	150E	4300750124		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 12-8D-12-15	08	120S	150E	4300750125		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 13-8D-12-15	08	120S	150E	4300750126		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 14-8D-12-15	08	120S	150E	4300750127		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 9-21D-12-15	21	120S	150E	4300750128		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 9A-21D-12-15	21	120S	150E	4300750129		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 10-21D-12-15	21	120S	150E	4300750130		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 10A-21D-12-15	21	120S	150E	4300750131		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 15A-21D-12-15	21	120S	150E	4300750132		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 15X-21D-12-15	21	120S	150E	4300750133		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 16-21D-12-15	21	120S	150E	4300750134		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 16A-21D-12-15	21	120S	150E	4300750135		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 13A-22D-12-15	21	120S	150E	4300750148		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 1A-27D-12-15	22	120S	150E	4300750161		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 2A-27D-12-15	22	120S	150E	4300750162		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 3A-27D-12-15	22	120S	150E	4300750163		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 9A-22D-12-15	22	120S	150E	4300750164		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 10A-22D-12-15	22	120S	150E	4300750165		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 11A-22D-12-15	22	120S	150E	4300750166		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 12A-22D-12-15	22	120S	150E	4300750167		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 14A-22D-12-15	22	120S	150E	4300750168		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 15A-22D-12-15	22	120S	150E	4300750169		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 16A-22D-12-15	22	120S	150E	4300750170		Federal	GW	APD	PRICKLY PEAR
PETERS POINT UF 15X-36D-12-16	36	120S	160E	4300750178		Federal	GW	APD	PETERS POINT
PRICKLY PEAR UF 15A-15D-12-15	15	120S	150E	4300750180		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 11B-15D-12-15	15	120S	150E	4300750181		Federal	GW	APD	PRICKLY PEAR
PETERS POINT UF 10-1D-13-16	36	120S	160E	4300750182		Federal	GW	APD	PETERS POINT
PETERS POINT UF 9-1D-13-16	36	120S	160E	4300750183		Federal	GW	APD	PETERS POINT
PRICKLY PEAR UF 16A-15D-12-15	15	120S	150E	4300750184		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 3A-18D-12-15	07	120S	150E	4300750185		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 4A-18D-12-15	07	120S	150E	4300750186		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 11A-7D-12-15	07	120S	150E	4300750187		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 2-18D-12-15	07	120S	150E	4300750188		Federal	GW	APD	PRICKLY PEAR

UDOGM CHANGE OF OPERATOR WELL LIST

PRICKLY PEAR UF 12A-7D-12-15	07	120S	150E	4300750189	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 13A-7D-12-15	07	120S	150E	4300750190	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 14A-7D-12-15	07	120S	150E	4300750191	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR FEDERAL 1-12D-12-14	12	120S	140E	4300750205	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 2-12D-12-14	12	120S	140E	4300750206	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 7-12D-12-14	12	120S	140E	4300750207	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 7A-12D-12-14	12	120S	140E	4300750208	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 8-12D-12-14	12	120S	140E	4300750209	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 4-7D-12-15	12	120S	140E	4300750210	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 5-7D-12-15	12	120S	140E	4300750211	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 8A-12D-12-14	12	120S	140E	4300750212	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 5A-7D-12-15	12	120S	140E	4300750213	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 7-14D-12-15	14	120S	150E	4300750214	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 7A-14D-12-15	14	120S	150E	4300750215	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 9-14D-12-15	14	120S	150E	4300750217	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 9A-14D-12-15	14	120S	150E	4300750218	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 10-14D-12-15	14	120S	150E	4300750219	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 10A-14D-12-15	14	120S	150E	4300750220	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 15A-14D-12-15	14	120S	150E	4300750222	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 16-14D-12-15	14	120S	150E	4300750223	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 16A-14D-12-15	14	120S	150E	4300750224	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 1A-18D-12-15	07	120S	150E	4300750225	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 2A-18D-12-15	07	120S	150E	4300750226	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 9A-7D-12-15	07	120S	150E	4300750227	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 10A-7D-12-15	07	120S	150E	4300750228	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 15A-7D-12-15	07	120S	150E	4300750229	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 16A-7D-12-15	07	120S	150E	4300750230	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 9A-12D-12-14	12	120S	140E	4300750233	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 10A-12D-12-14	12	120S	140E	4300750234	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 15A-12D-12-14	12	120S	140E	4300750235	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 12A-8D-12-15	08	120S	150E	4300750236	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 16A-12D-12-14	12	120S	140E	4300750237	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 11A-8D-12-15	08	120S	150E	4300750238	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 13A-8D-12-15	08	120S	150E	4300750239	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 14A-8D-12-15	08	120S	150E	4300750240	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 5A-8D-12-15	08	120S	150E	4300750260	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 6A-8D-12-15	08	120S	150E	4300750261	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 4-8D-12-15	08	120S	150E	4300750262	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 3-8D-12-15	08	120S	150E	4300750263	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 2-8D-12-15	08	120S	150E	4300750264	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 7A-8D-12-15	08	120S	150E	4300750265	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 7-8D-12-15	08	120S	150E	4300750266	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 5-8D-12-15	08	120S	150E	4300750267	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 6-8D-12-15	08	120S	150E	4300750268	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 10A-8D-12-15	08	120S	150E	4300750269	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 9A-8D-12-15	08	120S	150E	4300750270	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 8-8D-12-15	08	120S	150E	4300750271	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 1-8D-12-15	08	120S	150E	4300750272	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 8A-8D-12-15	08	120S	150E	4300750273	Federal	GW	APD	PRICKLY PEAR

UDOGM CHANGE OF OPERATOR WELL LIST

PRICKLY PEAR UF 5-9D-12-15	09	120S	150E	4300750274	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 5A-9D-12-15	09	120S	150E	4300750275	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 4-9D-12-15	09	120S	150E	4300750276	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 3-9D-12-15	09	120S	150E	4300750277	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 6A-9D-12-15	09	120S	150E	4300750278	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 11-9D-12-15	09	120S	150E	4300750279	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 12A-9D-12-15	09	120S	150E	4300750280	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 6-9D-12-15	09	120S	150E	4300750281	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 11A-9D-12-15	09	120S	150E	4300750282	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR US 1X-16D-12-15	10	120S	150E	4300750283	State	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 5A-15D-12-15	10	120S	150E	4300750284	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 6A-15D-12-15	10	120S	150E	4300750285	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 3-15D-13-15	10	120S	150E	4300750286	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 15A-10D-12-15	15	120S	150E	4300750287	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 13-10D-12-15	10	120S	150E	4300750288	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 15-10D-12-15	15	120S	150E	4300750289	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 16A-10D-12-15	15	120S	150E	4300750290	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 9-10D-12-15	15	120S	150E	4300750291	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 14A-10D-12-15	10	120S	150E	4300750292	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 10-10D-12-15	15	120S	150E	4300750293	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 16-10D-12-15	15	120S	150E	4300750294	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 13-11D-12-15	15	120S	150E	4300750295	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 13A-11D-12-15	15	120S	150E	4300750296	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 12-11D-12-15	15	120S	150E	4300750297	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 13A-10D-12-15	10	120S	150E	4300750298	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 12-10D-12-15	10	120S	150E	4300750299	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 11-10D-12-15	10	120S	150E	4300750300	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 3A-15D-12-15	10	120S	150E	4300750301	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 12-14D-12-15	14	120S	150E	4300750302	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 4-15D-12-15	10	120S	150E	4300750303	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 4A-15D-12-15	10	120S	150E	4300750304	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 14-10D-12-15	10	120S	150E	4300750305	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 9A-17D-12-15	17	120S	150E	4300750306	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 8A-17D-12-15	17	120S	150E	4300750307	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 10A-17D-12-15	17	120S	150E	4300750308	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 3-7D-12-15	07	120S	150E	4300750309	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 16A-17D-12-15	17	120S	150E	4300750310	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 6-7D-12-15	07	120S	150E	4300750311	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 15A-17D-12-15	17	120S	150E	4300750312	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 6A-7D-12-15	07	120S	150E	4300750313	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 7A-7D-12-15	07	120S	150E	4300750314	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 8A-7D-12-15	07	120S	150E	4300750315	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 6X-17D-12-15	17	120S	150E	4300750316	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 11A-17D-12-15	17	120S	150E	4300750317	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 15B-17D-12-15	17	120S	150E	4300750318	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 8A-20D-12-15	20	120S	150E	4300750319	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 1-7D-12-15	07	120S	150E	4300750320	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 7A-20D-12-15	20	120S	150E	4300750321	Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 9A-20D-12-15	20	120S	150E	4300750322	Federal	GW	APD	PRICKLY PEAR

UDOGM CHANGE OF OPERATOR WELL LIST

PRICKLY PEAR UF 10A-20D-12-15	20	120S	150E	4300750323		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 10-20D-12-15	20	120S	150E	4300750324		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 2-7D-12-15	07	120S	150E	4300750325		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 14A-20D-12-15	20	120S	150E	4300750326		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 16A-20D-12-15	20	120S	150E	4300750327		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 15A-20D-12-15	20	120S	150E	4300750328		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 8-7D-12-15	07	120S	150E	4300750329		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 15-20D-12-15	20	120S	150E	4300750330		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 7-7D-12-15	07	120S	150E	4300750331		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 6-10D-12-15	09	120S	150E	4300750332		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 5A-10D-12-15	09	120S	150E	4300750333		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 11A-10D-12-15	09	120S	150E	4300750334		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 6A-10D-12-15	09	120S	150E	4300750335		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 5-10D-12-15	09	120S	150E	4300750336		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 12A-10D-12-15	09	120S	150E	4300750338		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 3-10D-12-15	09	120S	150E	4300750339		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 4-10D-12-15	09	120S	150E	4300750340		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 8-9D-12-15	09	120S	150E	4300750341		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 8A-9D-12-15	09	120S	150E	4300750342		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 7A-9D-12-15	09	120S	150E	4300750343		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 7-9D-12-15	09	120S	150E	4300750344		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 1-9D-12-15	09	120S	150E	4300750345		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 2-9D-12-15	09	120S	150E	4300750346		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 1-24D-12-1	24	120S	150E	4300750348		Federal	GW	APD	PRICKLY PEAR
PRICKLY PEAR UF 9-13D-12-15	13	120S	150E	4300750349		Federal	GW	APD	PRICKLY PEAR
HORSE BENCH FED 4-20D-12-17	19	120S	170E	4300750350		Federal	GW	APD	
Horse Bench Federal 16-18D-12-17	19	120S	170E	4300750351		Federal	GW	APD	
PPU FED 9-34D-12-16	34	120S	160E	4300731430	17225	Federal	GW	OPS	PETERS POINT
PPU FED 15-35D-12-16	35	120S	160E	4300731475	2470	Federal	GW	OPS	PETERS POINT
PETERS POINT U FED 12A-6D-13-17	31	120S	170E	4300750034	2470	Federal	GW	OPS	PETERS POINT
PETERS POINT U FED 11A-31D-12-17	31	120S	170E	4300750036	2470	Federal	GW	OPS	PETERS POINT
PRICKLY PEAR U FED 7-21D-12-15	21	120S	150E	4300750055	14794	Federal	GW	OPS	PRICKLY PEAR
PETERS POINT U FED 9-6D-13-17	06	130S	170E	4300750120	2470	Federal	GW	OPS	PETERS POINT
PETERS POINT U FED 14-6D-13-17	06	130S	170E	4300750121	2470	Federal	GW	OPS	PETERS POINT
PETERS POINT U FED 15-6D-13-17	06	130S	170E	4300750122	2470	Federal	GW	OPS	PETERS POINT
PETERS POINT UF 2-7D-13-17	06	130S	170E	4300750149	2470	Federal	GW	OPS	PETERS POINT
PETERS POINT UF 1-7D-13-17	06	130S	170E	4300750150	2470	Federal	GW	OPS	PETERS POINT
PRICKLY PEAR US 1A-16D-12-15	09	120S	150E	4300750192	14794	State	GW	OPS	PRICKLY PEAR
PRICKLY PEAR US 2A-16D-12-15	09	120S	150E	4300750193	14794	State	GW	OPS	PRICKLY PEAR
PRICKLY PEAR US 2-16D-12-15	09	120S	150E	4300750194	14794	State	GW	OPS	PRICKLY PEAR
PRICKLY PEAR UF 9A-9D-12-15	09	120S	150E	4300750196	14794	Federal	GW	OPS	PRICKLY PEAR
PRICKLY PEAR UF 10-9D-12-15	09	120S	150E	4300750197	14794	Federal	GW	OPS	PRICKLY PEAR
PRICKLY PEAR UF 10A-9D-12-15	09	120S	150E	4300750198	14794	Federal	GW	OPS	PRICKLY PEAR
PRICKLY PEAR UF 14-9D-12-15	09	120S	150E	4300750199	14794	Federal	GW	OPS	PRICKLY PEAR
PRICKLY PEAR UF 14A-9D-12-15	09	120S	150E	4300750200	14794	Federal	GW	OPS	PRICKLY PEAR
PRICKLY PEAR UF 15-9D-12-15	09	120S	150E	4300750201	14794	Federal	GW	OPS	PRICKLY PEAR
PRICKLY PEAR UF 15A-9D-12-15	09	120S	150E	4300750203	14794	Federal	GW	OPS	PRICKLY PEAR
PRICKLY PEAR UF 16A-9D-12-15	09	120S	150E	4300750204	14794	Federal	GW	OPS	PRICKLY PEAR
SHARPLES 1 GOVT PICKRELL	11	120S	150E	4300716045	7030	Federal	GW	P	

UDOGM CHANGE OF OPERATOR WELL LIST

STONE CABIN UNIT 1	13	120S	140E	4300716542	12052 Federal	GW	P	
STONE CABIN FED 1-11	11	120S	140E	4300730014	6046 Federal	GW	P	
STONE CABIN FED 2-B-27	27	120S	150E	4300730018	14794 Federal	GW	P	PRICKLY PEAR
JACK CANYON 101-A	33	120S	160E	4300730049	2455 Federal	GW	P	
PETERS POINT ST 2-2-13-16	02	130S	160E	4300730521	14387 State	GW	P	
PRICKLY PEAR ST 16-15	16	120S	150E	4300730522	14794 State	GW	P	PRICKLY PEAR
PETERS POINT U FED 36-2	36	120S	160E	4300730761	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 36-3	36	120S	160E	4300730762	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 36-4	36	120S	160E	4300730763	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 14-25D-12-16	36	120S	160E	4300730764	2470 Federal	GW	P	PETERS POINT
HUNT RANCH 3-4	03	120S	150E	4300730775	13158 State	GW	P	
PETERS POINT U FED 4-31D-12-17	36	120S	160E	4300730810	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 16-26D-12-16	36	120S	160E	4300730812	2470 Federal	GW	P	PETERS POINT
PRICKLY PEAR UNIT 13-4	13	120S	140E	4300730825	14353 Federal	GW	P	
PRICKLY PEAR UNIT 21-2	21	120S	150E	4300730828	14794 Federal	GW	P	PRICKLY PEAR
PETERS POINT U FED 6-7D-13-17	06	130S	170E	4300730859	14692 Federal	GW	P	PETERS POINT
PETERS POINT ST 4-2-13-16	02	130S	160E	4300730866	14386 State	GW	P	
PRICKLY PEAR U ST 13-16	16	120S	150E	4300730933	14794 State	GW	P	PRICKLY PEAR
PRICKLY PEAR U ST 11-16	16	120S	150E	4300730944	14794 State	GW	P	PRICKLY PEAR
PRICKLY PEAR U ST 7-16	16	120S	150E	4300730945	14794 State	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 7-25	25	120S	150E	4300730954	14794 Federal	GW	P	PRICKLY PEAR
PETERS POINT U FED 16-35	35	120S	160E	4300730965	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 11-6-13-17	06	130S	170E	4300730982	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 16-6D-13-17	06	130S	170E	4300731004	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 16-31D-12-17	06	130S	170E	4300731005	2470 Federal	GW	P	PETERS POINT
PRICKLY PEAR U FED 5-13-12-14	13	120S	140E	4300731008	14897 Federal	GW	P	
PETERS POINT U FED 12-31D-12-17	36	120S	160E	4300731009	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 2-36D-12-16	36	120S	160E	4300731010	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 9-36-12-16	36	120S	160E	4300731011	2470 Federal	GW	P	PETERS POINT
PRICKLY PEAR U ST 36-06	36	120S	150E	4300731018	14794 State	GW	P	PRICKLY PEAR
PETERS POINT U FED 8-35D-12-16	36	120S	160E	4300731024	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 4-12D-13-16	02	130S	160E	4300731049	14692 Federal	GW	P	PETERS POINT
PETERS POINT ST 5-2D-13-16 DEEP	02	130S	160E	4300731056	15909 State	GW	P	
PRICKLY PEAR U FED 13-23-12-15	23	120S	150E	4300731073	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 1-27D-12-15	23	120S	150E	4300731074	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 3-26D-12-15	23	120S	150E	4300731075	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 15-22D-12-15	23	120S	150E	4300731076	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 3-28D-12-15	21	120S	150E	4300731121	14794 Federal	GW	P	PRICKLY PEAR
PETERS POINT U FED 2-12D-13-16	06	130S	170E	4300731158	14692 Federal	GW	P	PETERS POINT
PRICKLY PEAR U FED 15-21-12-15	21	120S	150E	4300731164	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 7-28D-12-15	21	120S	150E	4300731165	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 13-21D-12-15	21	120S	150E	4300731166	14794 Federal	GW	P	PRICKLY PEAR
PETERS POINT U FED 10-36D-12-16	36	120S	160E	4300731174	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 12-36D-12-16	36	120S	160E	4300731175	2470 Federal	GW	P	PETERS POINT
PRICKLY PEAR U FED 15-17-12-15	17	120S	150E	4300731183	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 11-17D-12-15	17	120S	150E	4300731184	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 7-22D-12-15	22	120S	150E	4300731186	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 3-22-12-15	22	120S	150E	4300731187	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 5-22D-12-15	22	120S	150E	4300731188	14794 Federal	GW	P	PRICKLY PEAR

UDOGM CHANGE OF OPERATOR WELL LIST

PRICKLY PEAR 11-15D-12-15	22	120S	150E	4300731189	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 9-18D-12-15	18	120S	150E	4300731192	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 15-18-12-15	18	120S	150E	4300731193	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 16-27D-12-15	27	120S	150E	4300731194	15569	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 12-27D-12-15	27	120S	150E	4300731195	15568	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 10-27-12-15	27	120S	150E	4300731196	15570	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 9-20D-12-15	20	120S	150E	4300731197	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 7-20-12-15	20	120S	150E	4300731198	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 1-20-12-15	20	120S	150E	4300731206	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U ST 2-36-12-15	36	120S	150E	4300731226	15719	State	GW	P	
PRICKLY PEAR U ST 4-36-12-15	36	120S	150E	4300731227	14794	State	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 4-27D-12-15	22	120S	150E	4300731237	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 13-22-12-15	22	120S	150E	4300731238	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 3-27D-12-15	22	120S	150E	4300731239	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U ST 9-16-12-15	16	120S	150E	4300731240	14794	State	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 9-28D-12-15	28	120S	150E	4300731241	16028	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 5-27D-12-15	28	120S	150E	4300731242	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 1-28-12-15	28	120S	150E	4300731243	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 8-28D-12-15	28	120S	150E	4300731244	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U ST 1-16-12-15	16	120S	150E	4300731245	14794	State	GW	P	PRICKLY PEAR
PPU FED 11-18D-12-15	18	120S	150E	4300731257	14794	Federal	GW	P	PRICKLY PEAR
PPU FED 11-20D-12-15	20	120S	150E	4300731258	14794	Federal	GW	P	PRICKLY PEAR
PPU FED 4-25D-12-15	25	120S	150E	4300731259	14794	Federal	GW	P	PRICKLY PEAR
PPU FED 12-25D-12-15	25	120S	150E	4300731260	16068	Federal	GW	P	PRICKLY PEAR
PPU FED 15-6D-13-17	06	130S	170E	4300731261	16103	Federal	GW	P	PETERS POINT
PP UF 3-36-12-16	36	120S	160E	4300731271	2470	Federal	GW	P	PETERS POINT
PP UF 6-36-12-16	36	120S	160E	4300731272	2470	Federal	GW	P	PETERS POINT
PPU FED 6-35D-12-16	35	120S	160E	4300731275	2470	Federal	GW	P	PETERS POINT
PPU FED 14-26D-12-16	26	120S	160E	4300731277	2470	Federal	GW	P	PETERS POINT
PPU FED 8-34-12-16	34	120S	160E	4300731279	2470	Federal	GW	P	PETERS POINT
PP ST 8-2D-13-16 (DEEP)	02	130S	160E	4300731280	16069	State	GW	P	
PPU FED 6-34D-12-16	34	120S	160E	4300731281	2470	Federal	GW	P	PETERS POINT
PPU FED 14-26D-12-15	35	120S	150E	4300731282	16224	Federal	GW	P	PRICKLY PEAR
PPU FED 2-35-12-15	35	120S	150E	4300731283	14794	Federal	GW	P	PRICKLY PEAR
PPU FED 10-26D-12-15	35	120S	150E	4300731284	14794	Federal	GW	P	PRICKLY PEAR
PPU FED 9-17-12-15	17	120S	150E	4300731287	14794	Federal	GW	P	PRICKLY PEAR
PPU FED 1-17D-12-15	17	120S	150E	4300731288	14794	Federal	GW	P	PRICKLY PEAR
PPU FED 7-17D-12-15	17	120S	150E	4300731289	14794	Federal	GW	P	PRICKLY PEAR
PPU FED 7-1D-13-16 ULTRA DEEP	06	130S	170E	4300731293	14692	Federal	GW	P	PETERS POINT
PPU FED 1-18D-12-15	18	120S	150E	4300731294	14794	Federal	GW	P	PRICKLY PEAR
PPU FED 7-18D-12-15	18	120S	150E	4300731295	14794	Federal	GW	P	PRICKLY PEAR
PPU FED 5-17D-12-15	18	120S	150E	4300731296	14794	Federal	GW	P	PRICKLY PEAR
PPU FED 10-17D-12-15	17	120S	150E	4300731307	14794	Federal	GW	P	PRICKLY PEAR
PPU FED 8-17D-12-15	17	120S	150E	4300731308	14794	Federal	GW	P	PRICKLY PEAR
PPU FED 12-17D-12-15	17	120S	150E	4300731309	14794	Federal	GW	P	PRICKLY PEAR
PPU FED 13-17D-12-15	17	120S	150E	4300731310	14794	Federal	GW	P	PRICKLY PEAR
PPU FED 14-17D-12-15	17	120S	150E	4300731311	14794	Federal	GW	P	PRICKLY PEAR
PPU FED 16-18D-12-15	17	120S	150E	4300731312	14794	Federal	GW	P	PRICKLY PEAR
PPU FED 8-18D-12-15	18	120S	150E	4300731313	14794	Federal	GW	P	PRICKLY PEAR

UDOGM CHANGE OF OPERATOR WELL LIST

PPU FED 3-18D-12-15	18	120S	150E	4300731314	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 4-18-12-15	18	120S	150E	4300731315	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 5-18D-12-15	18	120S	150E	4300731316	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 6-18D-12-15	18	120S	150E	4300731317	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 16-27-12-16	27	120S	160E	4300731318	2470 Federal	GW	P	PETERS POINT
PPU FED 10-27D-12-16	27	120S	160E	4300731319	2470 Federal	GW	P	PETERS POINT
PPU FED 2-34D-12-16	34	120S	160E	4300731320	2470 Federal	GW	P	PETERS POINT
PPU FED 16-17D-12-15	17	120S	150E	4300731321	14794 Federal	GW	P	PRICKLY PEAR
PPU ST 15-16D-12-15	16	120S	150E	4300731322	14794 State	GW	P	PRICKLY PEAR
PPU ST 16-16D-12-15	16	120S	150E	4300731323	14794 State	GW	P	PRICKLY PEAR
PPU ST 14-16D-12-15	16	120S	150E	4300731324	14794 State	GW	P	PRICKLY PEAR
PPU FED 2-7D-13-17 DEEP	06	130S	170E	4300731326	14692 Federal	GW	P	PETERS POINT
PPU FED 3-21D-12-15	21	120S	150E	4300731328	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 4-21D-12-15	21	120S	150E	4300731329	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 2-35D-12-16	35	120S	160E	4300731345	2470 Federal	GW	P	PETERS POINT
PPU FED 7-35D-12-16	35	120S	160E	4300731346	2470 Federal	GW	P	PETERS POINT
PPU FED 4-35D-12-16	35	120S	160E	4300731347	2470 Federal	GW	P	PETERS POINT
PPU FED 7-36D-12-16	36	120S	160E	4300731348	2470 Federal	GW	P	PETERS POINT
PPU FED 11-36D-12-16	36	120S	160E	4300731349	2470 Federal	GW	P	PETERS POINT
PPU FED 15-25D-12-16	36	120S	160E	4300731351	2470 Federal	GW	P	PETERS POINT
PPU FED 13-25D-12-16	36	120S	160E	4300731352	2470 Federal	GW	P	PETERS POINT
PPU FED 4-36D-12-16	36	120S	160E	4300731353	2470 Federal	GW	P	PETERS POINT
PPU FED 13-15D-12-15	22	120S	150E	4300731358	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 14-15D-12-15	22	120S	150E	4300731359	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 4-22D-12-15	22	120S	150E	4300731360	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 6-22D-12-15	22	120S	150E	4300731361	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 2-28D-12-15	28	120S	150E	4300731362	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 16X-21D-12-15	28	120S	150E	4300731363	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 5A-27D-12-15	28	120S	150E	4300731364	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 1-35D-12-16	35	120S	160E	4300731365	2470 Federal	GW	P	PETERS POINT
PPU FED 1A-28D-12-15	28	120S	150E	4300731368	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 14A-18D-12-15	18	120S	150E	4300731393	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 10-18D-12-15	18	120S	150E	4300731394	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 15A-18D-12-15	18	120S	150E	4300731395	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 16A-18D-12-15	18	120S	150E	4300731396	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 12-22D-12-15	22	120S	150E	4300731398	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 11-22D-12-15	22	120S	150E	4300731399	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 14-22D-12-15	22	120S	150E	4300731400	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 4A-27D-12-15	22	120S	150E	4300731401	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 13-26D-12-16	26	120S	160E	4300731403	2470 Federal	GW	P	PETERS POINT
PPU FED 15-26D-12-16	26	120S	160E	4300731404	2470 Federal	GW	P	PETERS POINT
PPU FED 3-35D-12-16	26	120S	160E	4300731405	2470 Federal	GW	P	PETERS POINT
PPU FED 10-26D-12-16	26	120S	160E	4300731406	2470 Federal	GW	P	PETERS POINT
PPU FED 11-26D-12-16	26	120S	160E	4300731407	2470 Federal	GW	P	PETERS POINT
PPU FED 12-26D-12-16	26	120S	160E	4300731408	2470 Federal	GW	P	PETERS POINT
PPU FED 11-27D-12-16	27	120S	160E	4300731409	2470 Federal	GW	P	PETERS POINT
PPU FED 15-27D-12-16	27	120S	160E	4300731410	2470 Federal	GW	P	PETERS POINT
PPU FED 9-27D-12-16	27	120S	160E	4300731411	2470 Federal	GW	P	PETERS POINT
PPU FED 11-21D-12-15	21	120S	150E	4300731412	14794 Federal	GW	P	PRICKLY PEAR

UDOGM CHANGE OF OPERATOR WELL LIST

PPU FED 6-21D-12-15	21	120S	150E	4300731413	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 12-21D-12-15	21	120S	150E	4300731414	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 8-20D-12-15	20	120S	150E	4300731419	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 1A-20D-12-15	20	120S	150E	4300731420	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 2-20D-12-15	20	120S	150E	4300731421	14794 Federal	GW	P	PRICKLY PEAR
PPU ST 7A-16D-12-15	16	120S	150E	4300731422	14794 State	GW	P	PRICKLY PEAR
PPU ST 6-16D-12-15	16	120S	150E	4300731423	14794 State	GW	P	PRICKLY PEAR
PPU ST 10A-16D-12-15	16	120S	150E	4300731424	14794 State	GW	P	PRICKLY PEAR
PPU ST 3-16D-12-15	16	120S	150E	4300731425	14794 State	GW	P	PRICKLY PEAR
PPU FED 1-34D-12-16	34	120S	160E	4300731427	2470 Federal	GW	P	PETERS POINT
PPU FED 7-34D-12-16	34	120S	160E	4300731428	2470 Federal	GW	P	PETERS POINT
PPU FED 5-35D-12-16	34	120S	160E	4300731429	2470 Federal	GW	P	PETERS POINT
PPU FED 5-21D-12-15	21	120S	150E	4300731451	14794 Federal	GW	P	PRICKLY PEAR
PPU ST 8-16D-12-15	16	120S	150E	4300731455	14794 State	GW	P	PRICKLY PEAR
PPU ST 12-16D-12-15	16	120S	150E	4300731456	14794 State	GW	P	PRICKLY PEAR
PPU ST 12A-16D-12-15	16	120S	150E	4300731457	14794 State	GW	P	PRICKLY PEAR
PPU ST 15A-16D-12-15	16	120S	150E	4300731458	14794 State	GW	P	PRICKLY PEAR
PPU ST 10-16D-12-15	16	120S	150E	4300731459	14794 State	GW	P	PRICKLY PEAR
PPU ST 11A-16D-12-15	16	120S	150E	4300731460	14794 State	GW	P	PRICKLY PEAR
PPU ST 13A-16D-12-15	16	120S	150E	4300731461	14794 State	GW	P	PRICKLY PEAR
PPU FED 3-34D-12-16	34	120S	160E	4300731466	2470 Federal	GW	P	PETERS POINT
PPU FED 5-34D-12-16	34	120S	160E	4300731467	2470 Federal	GW	P	PETERS POINT
PPU FED 4-34D-12-16	34	120S	160E	4300731468	2470 Federal	GW	P	PETERS POINT
PPU FED 10-7D-12-15	07	120S	150E	4300731470	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 15-7D-12-15	07	120S	150E	4300731471	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 9-7D-12-15	07	120S	150E	4300731472	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 16-7D-12-15	07	120S	150E	4300731473	14794 Federal	GW	P	PRICKLY PEAR
PPU FED 10-35D-12-16	35	120S	160E	4300731474	2470 Federal	GW	P	PETERS POINT
PPU FED 9-35D-12-16	35	120S	160E	4300731476	2470 Federal	GW	P	PETERS POINT
PPU ST 6A-16D-12-15	16	120S	150E	4300731477	14794 State	GW	P	PRICKLY PEAR
PPU ST 4-16D-12-15	16	120S	150E	4300731478	14794 State	GW	P	PRICKLY PEAR
PPU ST 4A-16D-12-15	16	120S	150E	4300731479	14794 State	GW	P	PRICKLY PEAR
PPU ST 5A-16D-12-15	16	120S	150E	4300731480	14794 State	GW	P	PRICKLY PEAR
PPU ST 3A-16D-12-15	16	120S	150E	4300731481	14794 State	GW	P	PRICKLY PEAR
PPU ST 16A-16D-12-15	16	120S	150E	4300731484	14794 State	GW	P	PRICKLY PEAR
PPU ST 9A-16D-12-15	16	120S	150E	4300731485	14794 State	GW	P	PRICKLY PEAR
PPU ST 16B-16D-12-15	16	120S	150E	4300731514	14794 State	GW	P	PRICKLY PEAR
PPU ST 14B-16D-12-15	16	120S	150E	4300731515	14794 State	GW	P	PRICKLY PEAR
PPU ST 13B-16D-12-15	16	120S	150E	4300731516	14794 State	GW	P	PRICKLY PEAR
PETERS POINT U FED 9-26D-12-16	25	120S	160E	4300750021	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 11-25D-12-16	25	120S	160E	4300750022	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 10-31D-12-17	31	120S	170E	4300750023	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 11-31D-12-17	31	120S	170E	4300750024	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 13A-31D-12-17	31	120S	170E	4300750025	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 13-31D-12-17	31	120S	170E	4300750026	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 14-31D-12-17	31	120S	170E	4300750027	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 14A-31D-12-17	31	120S	170E	4300750028	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 12-25D-12-16	25	120S	160E	4300750029	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 12-6D-13-17	31	120S	170E	4300750033	2470 Federal	GW	P	PETERS POINT

## UDOGM CHANGE OF OPERATOR WELL LIST

PETERS POINT U FED 10-25D-12-16	25	120S	160E	4300750035	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 13-36D-12-16	36	120S	160E	4300750037	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 15-36D-12-16	36	120S	160E	4300750038	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 11-1D-13-16	36	120S	160E	4300750039	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 12-1D-13-16	36	120S	160E	4300750040	2470 Federal	GW	P	PETERS POINT
PRICKLY PEAR U FED 9-22D-12-15	22	120S	150E	4300750041	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 10-22D-12-15	22	120S	150E	4300750042	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 16-22D-12-15	22	120S	150E	4300750043	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 2-27D-12-15	22	120S	150E	4300750044	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 16-15D-12-15	15	120S	150E	4300750045	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 15-15D-12-15	15	120S	150E	4300750046	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 10-15D-12-15	15	120S	150E	4300750047	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 9-15D-12-15	15	120S	150E	4300750048	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 11A-15D-12-15	15	120S	150E	4300750049	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 1-21D-12-15	21	120S	150E	4300750050	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 2-21D-12-15	21	120S	150E	4300750051	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 2A-21D-12-15	21	120S	150E	4300750052	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 4A-22D-12-15	21	120S	150E	4300750053	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 5A-22D-12-15	21	120S	150E	4300750054	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 7A-21D-12-15	21	120S	150E	4300750056	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 8-21D-12-15	21	120S	150E	4300750057	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 8A-21D-12-15	21	120S	150E	4300750058	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 16-8D-12-15	08	120S	150E	4300750059	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 15-8D-12-15	08	120S	150E	4300750060	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 2-17D-12-15	08	120S	150E	4300750061	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 1A-17D-12-15	08	120S	150E	4300750062	14794 Federal	GW	P	PRICKLY PEAR
PETERS POINT U FED 3A-34D-12-16	27	120S	160E	4300750063	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 4A-34D-12-16	27	120S	160E	4300750064	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 12-27D-12-16	27	120S	160E	4300750065	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 13-27D-12-16	27	120S	160E	4300750066	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 13A-27D-12-16	27	120S	160E	4300750067	2470 Federal	GW	P	PETERS POINT
PETERS POINT U FED 14-27D-12-16	27	120S	160E	4300750068	18204 Federal	GW	P	
PETERS POINT U FED 14A-27D-12-16	27	120S	160E	4300750069	2470 Federal	GW	P	PETERS POINT
PRICKLY PEAR U FED 1-22D-12-15	22	120S	150E	4300750076	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 2-22D-12-15	22	120S	150E	4300750077	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 8-22D-12-15	22	120S	150E	4300750078	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 3-17D-12-15	17	120S	150E	4300750079	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 3A-17D-12-15	17	120S	150E	4300750080	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 4-17D-12-15	17	120S	150E	4300750081	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 4A-17D-12-15	17	120S	150E	4300750082	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 5A-17D-12-15	17	120S	150E	4300750083	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 6-17D-12-15	17	120S	150E	4300750084	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 6A-17D-12-15	17	120S	150E	4300750085	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 7A-17D-12-15	17	120S	150E	4300750086	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 12A-17D-12-15	17	120S	150E	4300750087	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 9-12D-12-14	12	120S	140E	4300750088	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 10-12D-12-14	12	120S	140E	4300750089	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 15-12D-12-14	12	120S	140E	4300750090	14794 Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 16-12D-12-14	12	120S	140E	4300750091	14794 Federal	GW	P	PRICKLY PEAR

UDOGM CHANGE OF OPERATOR WELL LIST

PRICKLY PEAR U FED 3-20D-12-15	20	120S	150E	4300750098	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 3A-20D-12-15	20	120S	150E	4300750099	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 4-20D-12-15	20	120S	150E	4300750100	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 4A-20D-12-15	20	120S	150E	4300750101	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 5-20D-12-15	20	120S	150E	4300750102	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 6-20D-12-15	20	120S	150E	4300750104	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 6A-20D-12-15	20	120S	150E	4300750105	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 11A-20D-12-15	20	120S	150E	4300750106	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR U FED 12A-20D-12-15	20	120S	150E	4300750107	14794	Federal	GW	P	PRICKLY PEAR
PETERS POINT U FED 5-31D-12-17	36	120S	160E	4300750109	2470	Federal	GW	P	PETERS POINT
PETERS POINT U FED 6-31D-12-17	36	120S	160E	4300750116	2470	Federal	GW	P	PETERS POINT
PETERS POINT U FED 9X-36D-12-16	36	120S	160E	4300750117	2470	Federal	GW	P	PETERS POINT
PETERS POINT U FED 1-36D-12-16	36	120S	160E	4300750118	2470	Federal	GW	P	PETERS POINT
PETERS POINT U FED 10-6D-13-17	06	130S	170E	4300750119	2470	Federal	GW	P	PETERS POINT
PETERS POINT U FED 15-31D-12-17	06	130S	170E	4300750123	2470	Federal	GW	P	PETERS POINT
PRICKLY PEAR UF 7A-18D-12-15	17	120S	150E	4300750136	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 8A-18D-12-15	17	120S	150E	4300750137	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 9A-18D-12-15	17	120S	150E	4300750138	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 12-20D-12-15	20	120S	150E	4300750139	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 16A-8D-12-15	08	120S	150E	4300750140	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 15A-8D-12-15	08	120S	150E	4300750141	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 13A-9D-12-15	08	120S	150E	4300750142	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 13-9D-12-15	08	120S	150E	4300750143	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 12-9D-12-15	08	120S	150E	4300750144	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 10-8D-12-15	08	120S	150E	4300750145	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 9-8D-12-15	08	120S	150E	4300750146	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 2A-17D-12-15	08	120S	150E	4300750147	14794	Federal	GW	P	PRICKLY PEAR
PETERS POINT UF 12-5D-13-17	06	130S	170E	4300750151	2470	Federal	GW	P	PETERS POINT
PETERS POINT UF 13-5D-13-17	06	130S	170E	4300750152	2470	Federal	GW	P	PETERS POINT
PETERS POINT UF 13-30D-12-17	30	120S	170E	4300750153	18347	Federal	GW	P	PETERS POINT
PETERS POINT UF 14-30D-12-17	30	120S	170E	4300750154	18350	Federal	GW	P	PETERS POINT
PETERS POINT UF 12-30D-12-17	30	120S	170E	4300750155	18346	Federal	GW	P	PETERS POINT
PETERS POINT UF 11-30D-12-17	30	120S	170E	4300750156	18348	Federal	GW	P	PETERS POINT
PETERS POINT UF 3-31D-12-17	30	120S	170E	4300750157	2470	Federal	GW	P	PETERS POINT
PETERS POINT UF 2-31D-12-17	30	120S	170E	4300750158	18349	Federal	GW	P	PETERS POINT
PETERS POINT UF 16-25D-12-16	30	120S	170E	4300750159	2470	Federal	GW	P	PETERS POINT
PETERS POINT UF 9-25D-12-16	30	120S	170E	4300750160	2470	Federal	GW	P	PETERS POINT
PRICKLY PEAR UF 1A-22D-12-15	22	120S	150E	4300750171	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 6A-22D-12-15	22	120S	150E	4300750173	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 7A-22D-12-15	22	120S	150E	4300750174	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 8A-22D-12-15	22	120S	150E	4300750175	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 14B-15D-12-15	22	120S	150E	4300750176	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 9-9D-12-15	09	120S	150E	4300750195	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 16-9D-12-15	09	120S	150E	4300750202	14794	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 8-14D-12-15	14	120S	150E	4300750216	18289	Federal	GW	P	PRICKLY PEAR
PRICKLY PEAR UF 15-14D-12-15	14	120S	150E	4300750221	18290	Federal	GW	P	PRICKLY PEAR
PETERS POINT UF 7X-36D-12-16	36	120S	160E	4300750231	2470	Federal	GW	P	PETERS POINT
PETERS POINT UF 8-36D-12-16	36	120S	160E	4300750232	2470	Federal	GW	P	PETERS POINT
PETERS POINT ST 6-2D-13-16	02	130S	160E	4300731017	14472	State	D	PA	

UDOGM CHANGE OF OPERATOR WELL LIST

PTS 33-36 STATE	36	110S	140E	4301330486	6190 State	GW	PA	ARGYLE
PRICKLY PEAR U FED 10-4	10	120S	140E	4300730823	14462 Federal	GW	S	
PRICKLY PEAR U FASSELIN 5-19-12-15	19	120S	150E	4300730860	14853 Fee	GW	S	
PRICKLY PEAR U ST 5-16	16	120S	150E	4300730943	14794 State	GW	S	PRICKLY PEAR
PRICKLY PEAR U FED 7-33D-12-15	33	120S	150E	4300730985	14771 Federal	GW	S	
PETERS POINT ST 8-2D-13-16	02	130S	160E	4300731016	14471 State	GW	S	
PPU FED 4-35D-12-15	35	120S	150E	4300731285	16223 Federal	GW	S	PRICKLY PEAR
PPU FED 5-36D-12-16	36	120S	160E	4300731350	2470 Federal	GW	S	PETERS POINT
PRICKLY PEAR U FED 5A-20D-12-15	20	120S	150E	4300750103	14794 Federal	GW	S	PRICKLY PEAR
PRICKLY PEAR U FED 13A-17D-12-15	20	120S	150E	4300750108	14794 Federal	GW	S	PRICKLY PEAR
PRICKLY PEAR UF 2A-22D-12-15	22	120S	150E	4300750172	14794 Federal	GW	S	PRICKLY PEAR