

STATE OF UTAH  
DIVISION OF OIL, GAS AND MINING

<b>APPLICATION FOR PERMIT TO DRILL OR DEEPEN</b>		5. Lease Designation and Serial Number: ML-48000	
1A. Type of Work: DRILL <input checked="" type="checkbox"/> DEEPEN <input type="checkbox"/>		6. If Indian, Allottee or Tribe Name: N/A	
B. Type of Well: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER: SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>		7. Unit Agreement Name: Drunkards Wash UTU-67921X	
2. Name of Operator: Phillips Petroleum Company		8. Farm or Lease Name: Utah	
3. Address and Telephone Number: 6825 S. 5300 W. P.O. Box 851 Price, Utah 84501 (435) 613-9777		9. Well Number: 27-520	
4. Location of Well (Footages) At Surface: 1253' FSL, 2033' FWL At Proposed Producing Zone: <span style="float: right;">4380352 H 498758 E</span>		10. Field or Pool, or Wildcat: Drunkards Wash	
14. Distance in miles and direction from nearest town or post office: 11.2 Miles southwest of Price, Utah		11. Qtr/Qtr, Section, Township, Range, Meridian: SE/4 SW/4 Section 27, T14S, R08E, SLB&M	12. County: Carbon
15. Distance to nearest property or lease line (feet): 3345'	16. Number of acres in lease: 1920	13. State: UTAH	
17. Number of acres assigned to this well: 160 acres	18. Distance to nearest well, drilling, completed, or applied for, on this lease (feet): 1800'	19. Proposed Depth: 3870'	
20. Rotary or cable tools: Rotary	21. Elevations (show whether DF, RT, GR, etc.): 7102' GR	22. Approximate date work will start: August 2001	

**PROPOSED CASING AND CEMENTING PROGRAM**

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
14"	12 3/4"	Conductor	40'	
11"	J-55 8 5/8"	24#/ft	387'	150sks G+2%CaCl+1/4#/sk floccel
7 7/8"	N-80 5 1/2"	17#/ft	3860'	354sks 50/50poz 8% gel + 2% CaCl + 10% extender 87 sks "G" thixotropic

DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

ORIGINAL

CONFIDENTIAL

RECEIVED  
MAY 16 2001  
DIVISION OF OIL, GAS AND MINING

24. Name & Signature: Jean Semborski *Jean Semborski* Title: Permit Specialist Date: 4/30/01

(This space for state use only)


API Number Assigned: 43-007-30777

Approval: **Approved by the Utah Division of Oil, Gas and Mining**  
Date: 05-16-01  
By: *[Signature]*

# Range 8 East

(S89°50'W- 5286.6')

Township 14 South

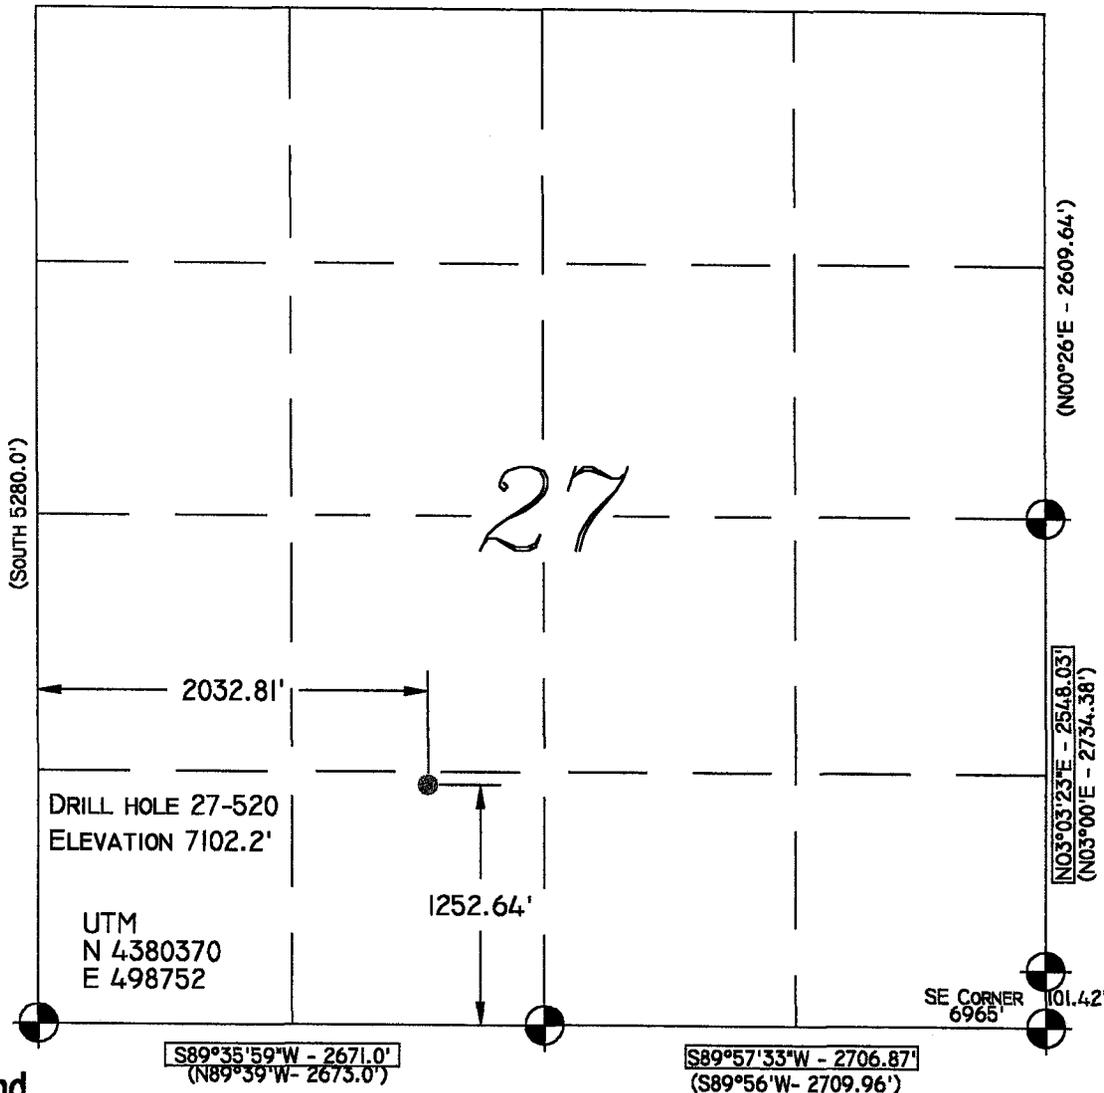


**Location:**  
THE WELL LOCATION WAS DETERMINED USING A TRIMBLE 4700 GPS SURVEY GRADE UNIT.

**Basis of Bearing:**  
THE BEARINGS INDICATED ARE PER THE RECORDED PLAT OBTAINED FROM THE U.S. LAND OFFICE.

**Basis of Elevation:**  
BASIS OF ELEVATION OF 6965' BEING AT THE SOUTHEAST SECTION CORNER OF SECTION 27, TOWNSHIP 14 SOUTH, RANGE 8 EAST, SALT LAKE BASE AND MERIDIAN, AS SHOWN ON THE WATTIS QUADRANGLE 7.5 MINUTE SERIES MAP.

**Description of Location:**  
PROPOSED DRILL HOLE LOCATED IN THE SE 1/4, SW 1/4 OF SECTION 27, T14S, R8E, S.L.B.&M., BEING 1252.64' NORTH AND 2032.81' EAST FROM THE SOUTHWEST SECTION CORNER OF SECTION 27, T14S, R8E, SALT LAKE BASE & MERIDIAN.

**Surveyor's Certificate:**  
I, Albert J. Spensko, a Registered Professional Land Surveyor, holding Certificate 146652 State of Utah, do hereby certify that the information on this drawing is a true and accurate survey based on data of record and was conducted under my personal direction and supervision as shown hereon.



**Talon Resources, Inc.**  
375 South Carbon Avenue, Suite 101  
Price, Utah 84501  
Ph: 435-637-8781  
Fax: 435-636-8603

**PHILLIPS PETROLEUM**  
WELL # 27-520  
Section 27, T14S, R8E, S.L.B.&M.  
Carbon County, Utah

Drawn By: J. STANSFIELD	Checked By: L.W.J. / A.J.S.
Drawing No. A-1	Date: 04/19/01
	Scale: 1" = 1000'
Sheet 1 of 4	Job No. 330

- Legend**
- Drill Hole Location
  - ⊙ Brass Cap (Found)
  - Brass Cap (Searched for, but not found)
  - △ Calculated Corner
  - ( ) GLO
- GPS Measured

NOTE: COORDINATES SHOWN REFLECTING DRILL HOLE LOCATION ARE UTM, ZONE 12, NAD 27, AND WERE ESTABLISHED USING A TRIMBLE PATHFINDER GPS UNIT. THESE COORDINATES ARE FOR REFERENCE ONLY.




Exhibit "A" 1 of 3



## PHILLIPS PETROLEUM COMPANY

6825 South 5300 West  
P.O. Box 851  
Price, UT 84501  
TEL: (435) 613-9777 FAX: (435) 613-9782

March 5, 2001

Ms Lisha Cordova  
State of Utah  
Division of Oil, Gas and Mining  
1594 West North Temple, Suite 1210  
SLC, Utah 84114-5801

RE: Application for Permit to Drill-  
Utah 27-520, SE/4 SW/4 Sec.27  
T14S, R08E, SLB & M, Carbon County, Utah

Dear Ms. Cordova:

Enclosed is the original of the *Application for Permit to Drill* (APD). Included with the APD is the following information:

- Exhibit "A"- Survey Plat of the Proposed Well Site;
- Exhibit "B" - Proposed Location Map with Pipeline, Power, and Road Access;
- Exhibit "C" - Drilling Site Layout;
- Exhibit "D" - Drilling Information
- Exhibit "E" - Multipoint Surface Use Plan
- Exhibit "F" - Typical Road Cross-section;
- Exhibit "G" - BOP Diagram;
- Exhibit "H" - Typical Wellhead Manifold;
- Exhibit "I" - Evidence of Bond;

ORIGINAL  
CONFIDENTIAL

This proposed well is located more than 460' from the boundary of the Unit Area and from the boundary of any uncommitted tract within the Unit Area and will not require the administrative approval in accordance with Utah Administrative Code Rule R649-3-3.

Please accept this letter as Phillips Petroleum Company's written request for confidential treatment of all information contained in and pertaining to this permit application, if said information is eligible for such consideration.

Thank you very much for your timely consideration of this application. Please feel free to contact me if you have any questions.



Sincerely,



Jean Semborski  
Permitting Specialist

cc: Mr. Eric Jones, BLM, Moab, Utah  
Mr. Chuck Snure, Texaco  
Mr. Robin Adams, Dominion Resources  
Mr. Don Stephens, BLM, Price, Utah  
Ms. Jeanette Borges, Phillips Petroleum Company  
Mr. Dave Levanger, Carbon County Planning and Zoning  
PPCo Well File




ELEVATION OF UNGRADED GROUND AT LOCATION STAKE = 7102.2'  
 ELAVATION OF GRADED GROUND AT LOCATION STAKE = 7101.7'

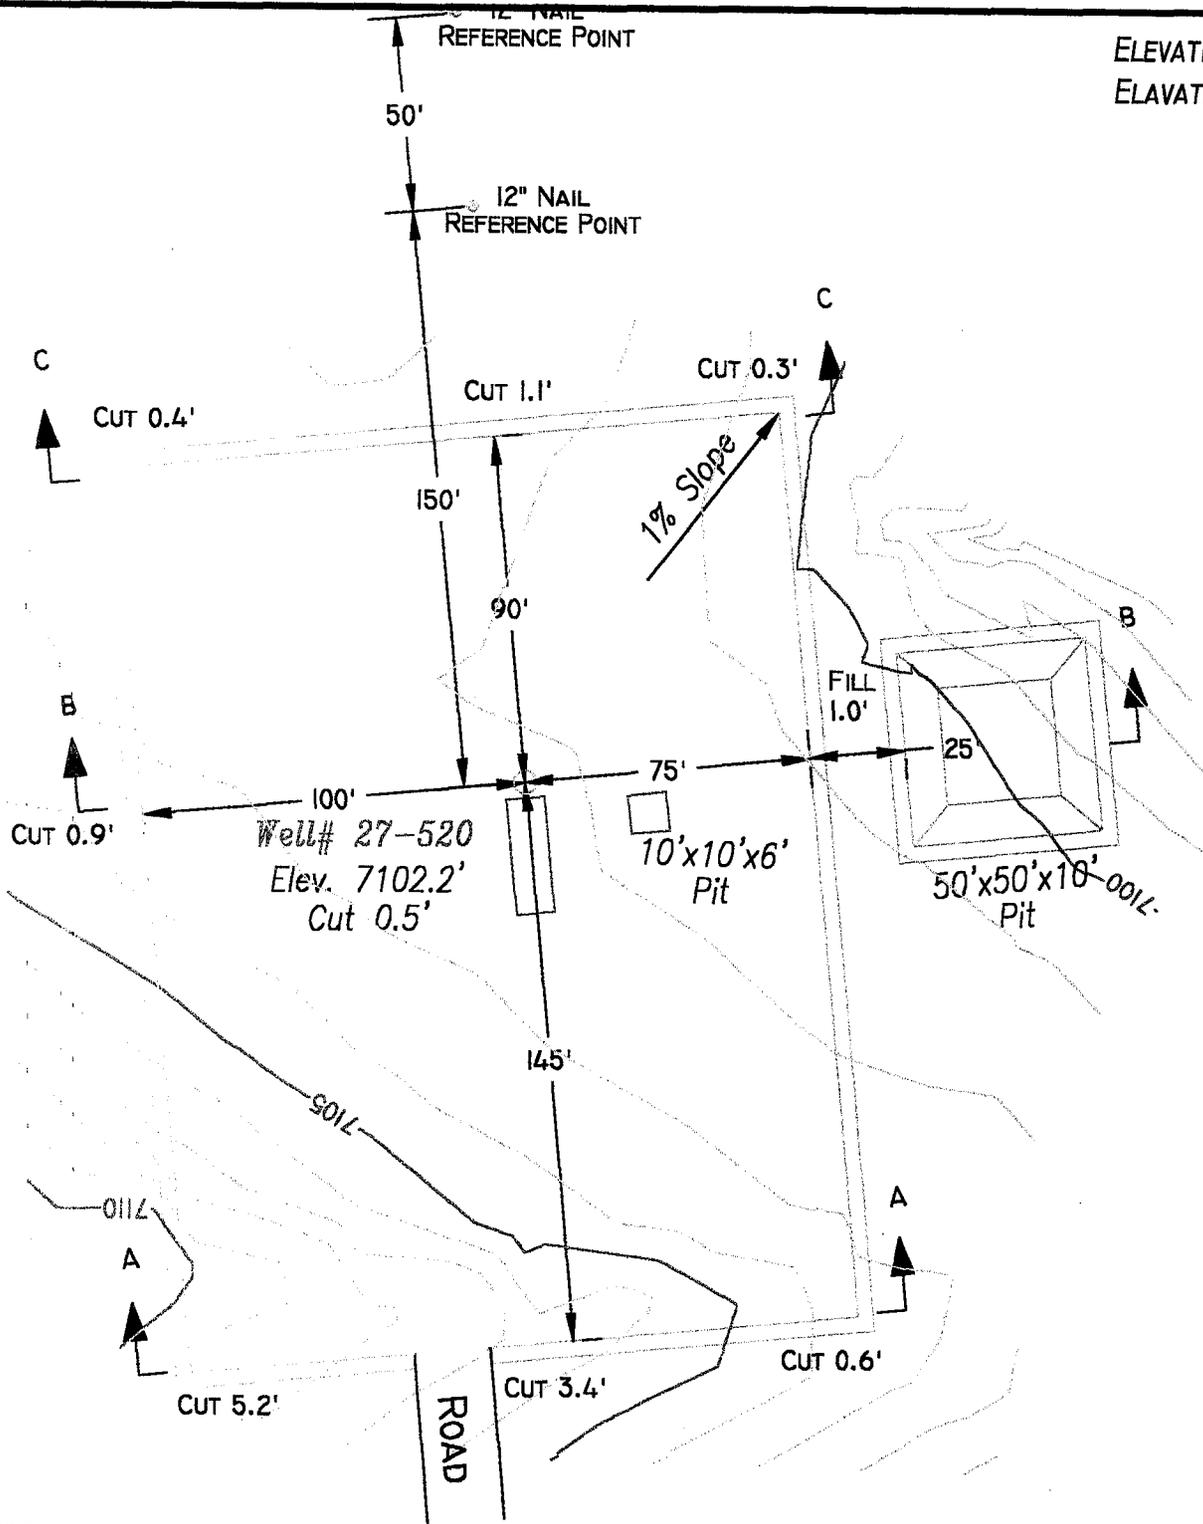

**Talon Resources, Inc.**  
 375 South Carbon Avenue, Suite 101  
 Price, Utah 84501  
 Ph: 435-637-8781  
 Fax: 435-636-8603


**PHILLIPS PETROLEUM**  
**LOCATION LAYOUT**  
 Section 27, T14S, R8E, S.L.B.&M.  
**WELL # 27-520**

Drawn By: J. STANSFIELD	Checked By: L.W.J.
Drawing No. A-2	Date: 04/19/01
	Scale: 1" = 50'
Sheet 2 of 4	Job No. 330

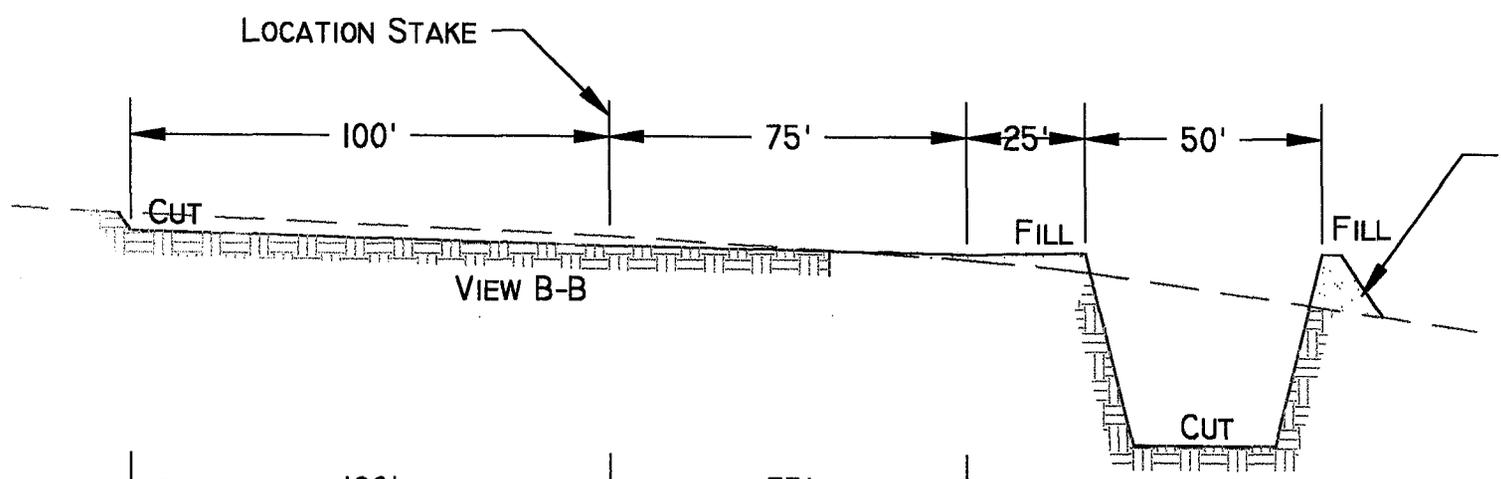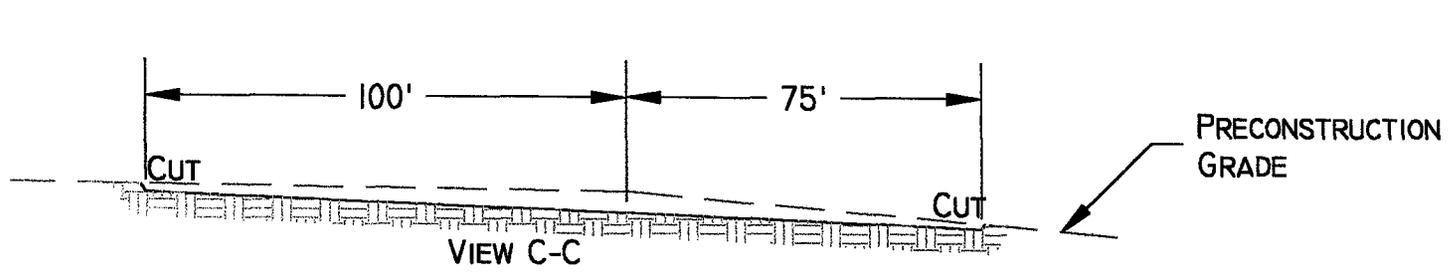

FINAL GRADE

SLOPE = 1 1/2 : 1  
(EXCEPT PIT)  
PIT SLOPE = 1 ; 1

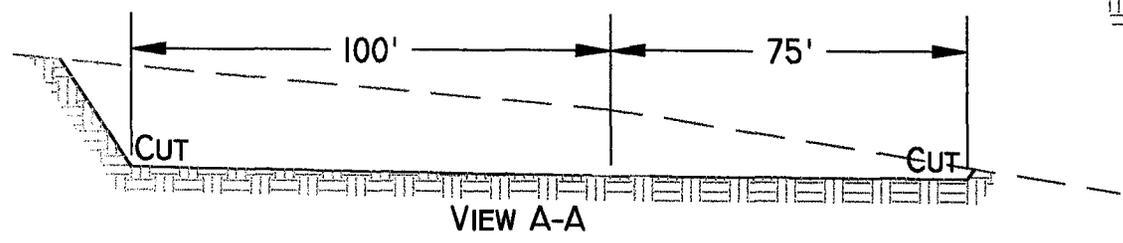

**Talon Resources, Inc.**  
375 South Carbon Avenue, Suite 101  
Price, Utah 84501  
Ph: 435-637-8781  
Fax: 435-636-8603


 **PHILLIPS PETROLEUM**  
TYPICAL CROSS SECTION  
Section 27, T14S, R8E, S.L.B.&M.  
WELL # 27-520

Drawn By: J. STANSFIELD	Checked By: L.W.J.
Drawing No. C-1	Date: 04/19/01
	Scale: 1" = 40'
Sheet 3 of 4	Job No. 330

APPROXIMATE YARDAGES

CUT  
(6") TOPSOIL STRIPPING = 750 CU. YDS.  
REMAINING LOCATION = 2,114 CU. YDS.  
TOTAL CUT = 2,814 CU. YDS.  
TOTAL FILL = 89.5 CU. YDS.




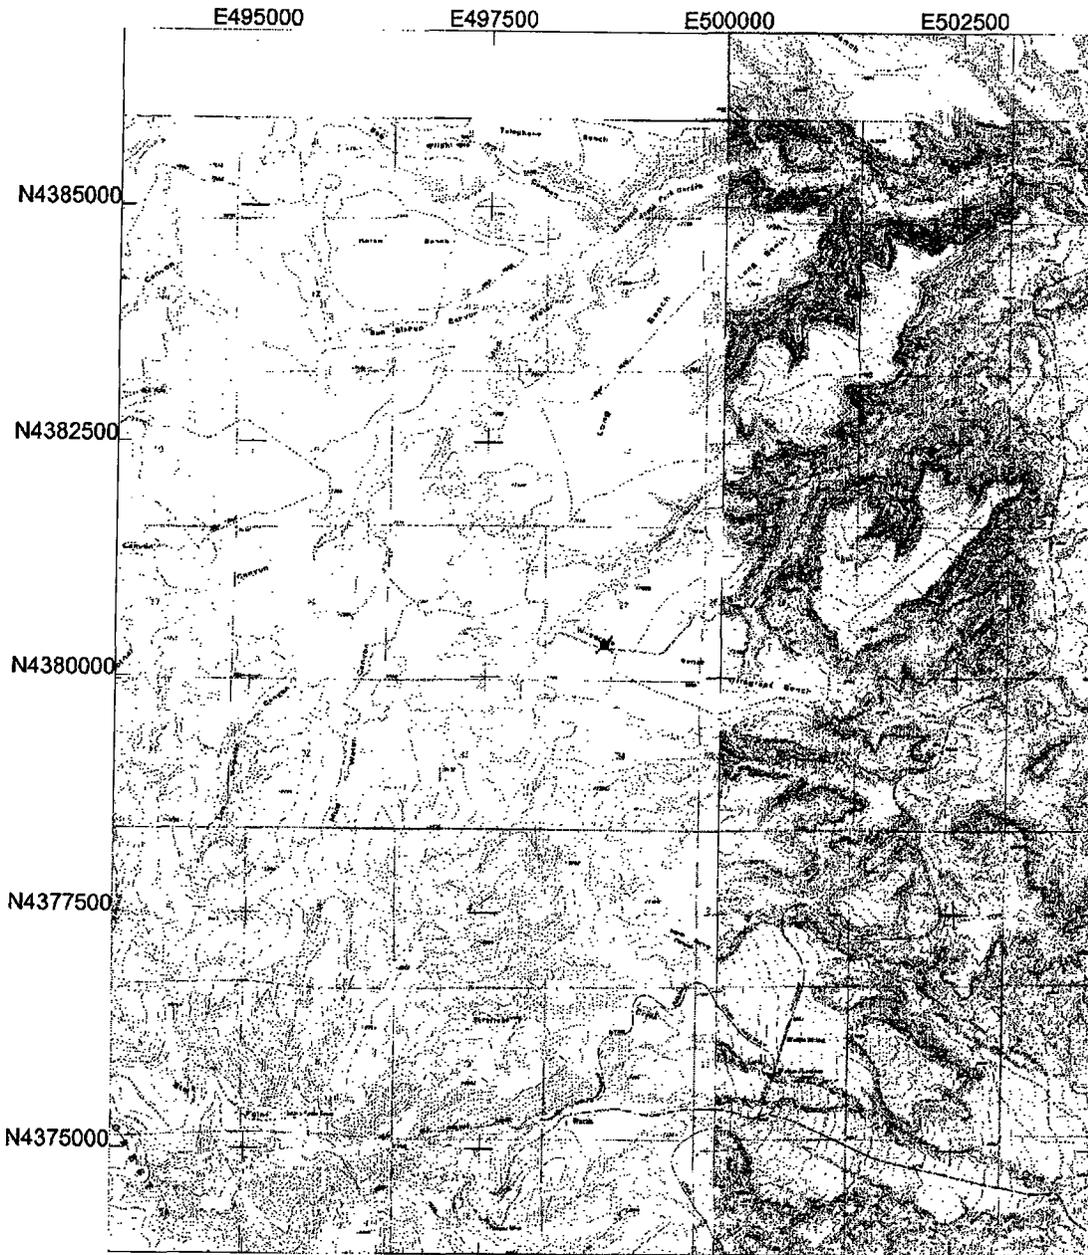

# UTAH 27-520

## Section 27, T14S, R8E

Universal Transverse Mercator  
12 North  
NAD 1927 (Conus)



ut27520.ssf  
05/01/2001  
Pathfinder Office  
 **Trimble**

# APPROXIMATE LAYOUT OF RIG & EQUIPMENT

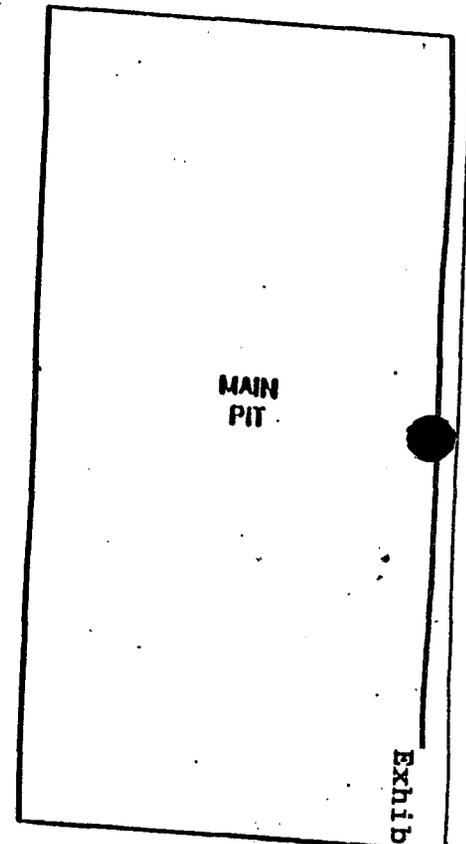

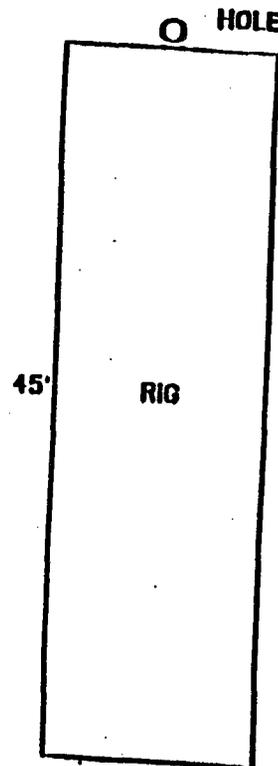

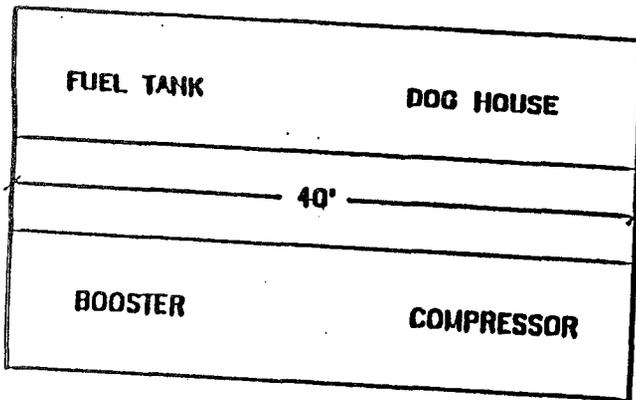



EXHIBIT "D"  
DRILLING PROGRAM

Attached to Form 3  
River Gas Corp.  
Utah 27-520  
SE/4, SW/4, Sec. 27, T14S, R08E, SLB & M  
1253' FSL, 2033' FWL  
Carbon County, Utah

1. The Surface Geologic Formation

Mancos Shale

2. Estimated Tops of Important Geologic Markers

Blue Gate/Ferron      3370'

3. Projected Gas & H2O zones (Ferron Formation)

Coals and sandstones 3370' - ~~3570'~~

No groundwater is expected to be encountered.

Casing & cementing will be done to protect potentially productive hydrocarbons, lost circulation zones, abnormal pressure zones, and prospectively valuable mineral deposits. All indications of usable water will be reported.

Surface casing will be tested to 1400 psi.

4. The Proposed Casing and Cementing Programs

<u>HOLE SIZE</u>	<u>SETTING DEPTH (INTERVAL)</u>	<u>SIZE (OD)</u>	<u>WEIGHT, GRADE &amp; JOINT</u>	<u>NEW, USED</u>
14"	<u>40'</u>	12-3/4"	Conductor	New
11"	<u>387'</u>	8-5/8"	24#ST&C	New
7-7/8"	<u>3860'</u>	5-1/2"	17#LT&C	New

Cement Program -Every attempt will be made to bring cement back to surface.

Surface Casing: 150 sks G+2%CaCl+1/4#per sack floccel; 15.8#/gal, density, 1.15 cu.ft/sk yield.

Production Casing: <sup>3/</sup>654 sks 50/50 poz 8%gel +2%CaCl+10%extender; 12.5#/gal, density, 1.92 cu.ft/sk yield.

87 sks "G" thixotropic, 14.2#/gal density, 1.61 cu.ft/sk yield

The following shall be entered in the driller's log:

- 1) Blowout preventer pressure tests, including test pressures and results;
- 2) Blowout preventer tests for proper functioning;
- 3) Blowout prevention drills conducted;
- 4) Casing run, including size, grade, weight, and depth set;
- 5) How the pipe was cemented, including amount of cement, type, whether cement circulated, location of the cementing tools, etc.;
- 6) Waiting on cement time for each casing string;
- 7) Casing pressure tests after cementing, including test pressures and results.

5. The Operator's Minimum Specifications for Pressure Control

Exhibit "G" is a schematic diagram of the blowout preventer equipment. A double gate 3000 psi BOPE will be used with a rotating head. This equipment will be tested to 2000 psi. All tests will be recorded in a Driller's Report Book. Physical operation of BOP's will be checked on each trip.

6. The Type and Characteristics of the Proposed Circulating Muds

0-300	11" hole	Drill with air, will mud-up if necessary.
300-TD	7 7/8" hole	Drill with air. 400 psi @ 1500-1800 Scf.

7. The Testing, Logging and Coring Programs are as followed

300-TD      Gamma Ray, Density, Neutron Porosity, Induction, Caliper

Any Anticipated Abnormal Pressures or Temperatures

No abnormal pressures or temperatures have been noted or reported in wells drilled in the area nor at the depths anticipated in this well. Bottom hole pressure expected is 1675 psi max. No hydrogen sulfide or other hazardous gases or fluids have been found, reported or are known to exist at these depths in the area.

8. Anticipated Starting Date and Duration of the Operations.

The well will be drilled around August 2001.

Verbal and/or written notifications listed below shall be submitted in accordance with instructions from the Division of Oil, Gas & Mining:

- (a) prior to beginning construction;
- (b) prior to spudding;
- (c) prior to running any casing or BOP tests;
- (d) prior to plugging the well, for verbal plugging instructions.

Spills, blowouts, fires, leaks, accidents or other unusual occurrences shall be reported to the Division of Oil, Gas & Mining immediately.

EXHIBIT "E"  
MULTIPOINT SURFACE USE PLAN

Attached to Form 3  
River Gas Corp.  
Utah 24-520  
SE/4, SW/4, Sec. 27, T14S, R08E, SLB & M  
1253' FSL, 2033' FWL  
Carbon County, Utah

**1. Existing Roads**

- a. We do not plan to change, alter or improve upon any existing state or county roads.
- b. Existing roads will be maintained in the same or better condition. See Exhibit "B".

**2. Planned Access**

Approximately 0' of new access is required (See Exhibit "B")

- a. Maximum Width: 24' travel surface with 27' base
- b. Maximum grade: 4%
- c. Turnouts: None
- d. Drainage design: 1 culvert may be required. Water will be diverted around well pad as necessary.
- e. If the well is productive, the road will be surfaced and maintained as necessary to prevent soil erosion and accommodate year-round traffic.
- f. Pipe and Power lines will follow the proposed access road.

**3. Location of Existing Wells**

- a. See Exhibit "B". There are 4 proposed and 2 existing wells within a one-mile radius of the proposed location.

**4. Location of Existing and/or Proposed Facilities**

- a. If the well is a producer, installation of production facilities will be as shown on Exhibit "H". Buried powerlines run along access on the east and north, gathering lines on the south or west.
- b. Rehabilitation of all pad areas not used for production facilities will be made in accordance with landowner stipulations.

## **5. Location and Type of Water Supply**

- a. Water to be used for drilling will be purchased from the Price River Water Improvement District (a local source of municipal water) (tel. 435-637-6350).
- b. Water will be transported by truck over approved access roads.
- c. No water well is to be drilled for this location.

## **6. Source of Construction Materials**

- a. Any necessary construction materials needed will be obtained locally and hauled to the location on existing roads.
- b. No construction or surfacing materials will be taken from Federal/Indian land.

## **7. Methods for handling waste disposal**

- a. As the well will be air drilled, a small reserve pit will be constructed with a minimum of one-half the total depth below the original ground surface on the lowest point within the pit. The pit will not be lined unless conditions encountered during construction warrant it or if deemed necessary by the DOGM representative during the pre-site inspection. Three sides of the reserve pit will be fenced within 24 hours after completion of construction and the fourth side within 24 hours after drilling operation cease with woven wire topped with barbed wire to a height of not less than four feet. The fence will be kept in good repair while the pit is drying.
- b. Following drilling, the liquid waste will be evaporated from the pit and the pit back-filled and returned to natural grade. No liquid hydrocarbons will be discharged to the reserve pit or location.
- c. In the event fluids are produced, any oil will be retained in tankage until sold and any water produced will be retained until its quality can be determined. The quality and quantity of the water will determine the method of disposal.
- d. Trash will be contained in a portable metal container and will be hauled from location periodically and disposed of at an approved disposal site. Chemical toilets will be placed on location and sewage will be disposed of at an appropriate disposal site.

## **8. Ancillary Facilities**

- a. We anticipate no need for ancillary facilities with the exception of one trailer to be located on the drill site.

## **9. Wellsite Layout**

- a. Available topsoil will be removed from the location and stockpiled. Location of mud tanks, reserve and berm pits, and soil stockpiles will be located as shown on the attachments.
- b. A blooie pit will be located 100' from the drill hole. A line will be placed on the surface from the center hole to the pit. The pit will not be lined, but will be fenced on four sides to protect livestock/wildlife.
- c. Access to the well pad will be as shown on Exhibit "B".
- d. Natural runoff will be diverted around the well pad.

## **10. Plans for Restoration of Surface**

- a. All surface areas not required for producing operations will be graded to as near original condition as possible and contoured to maintain possible erosion to a minimum.
- b. Available topsoil will be stockpiled and will be evenly distributed over the disturbed areas and the area will be reseeded as prescribed by the landowner.
- c. Pits and any other area that would present a hazard to wildlife or livestock will be fenced off when the rig is released and removed.

## **11. Surface Ownership:**

- a. The wellsite and access road will be constructed on lands owned by the State of Utah, School and Institutional Trust Lands Administration. The operator shall contact the landowner representative and the Division of Oil, Gas and mining 48 hours prior to beginning construction activities.

12. **Other Information:**

- a. The primary surface use is farming and grazing. The nearest dwelling is approximately 16,000 feet Southwest.
- b. Nearest live water is Gordon Creek, located 17,000' Northeast.
- c. If there is snow on the ground when construction begins, it will be removed before the soil is disturbed and piled downhill from the topsoil stockpile location.
- d. The backslope and foreslope will be constructed no steeper than 4:1.
- e. All equipment and vehicles will be confined to the access road and well pad.
- f. A complete copy of the approved Application for Permit to Drill (APD) including conditions and stipulations, shall be on the wellsite during construction and drilling operations

There will be no deviation from the proposed drilling and/or workover program without prior approval from the Division of Oil, Gas & Mining.

**13. Company Representative**

Jean Semborski  
Permitting Specialist  
Phillips Petroleum Company  
6825 S. 5300 W. P.O. Box 851  
Price, Utah 84501  
(435) 613-9777  
(435) 820-9807

Mail Approved A.P.D. To:

Company Representative

Excavation Contractor


Nelco Contractors Inc.  
Larry Jensen  
(435) 637-3495  
(435) 636-5268

**14. Certification**


I hereby certify that I, or persons under my direct supervision have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct, and that the work associated with the operations proposed herein will be performed by Phillips Petroleum Company and its subcontractors in conformity with this plan and the terms and conditions under which it is approved.

4/30/01  
Date

Jean Semborski  
Jean Semborski  
Permitting Specialist  
Phillips Petroleum Company

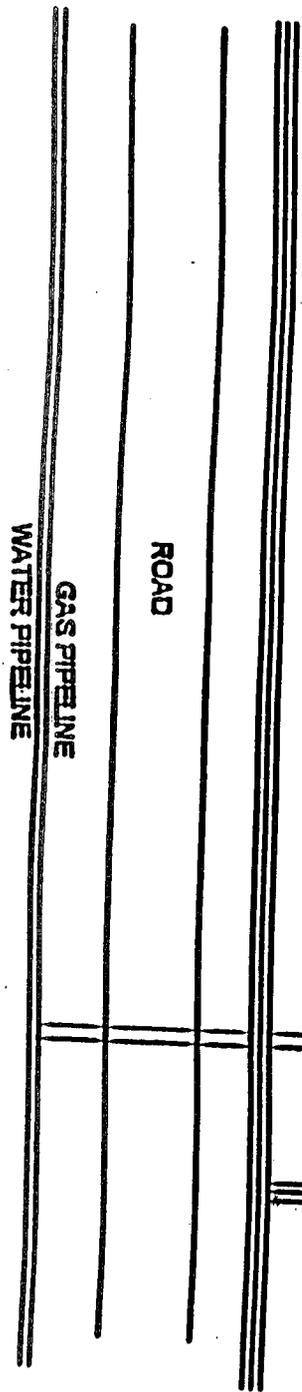

○ ANCHOR (TYP. 4 PL.)

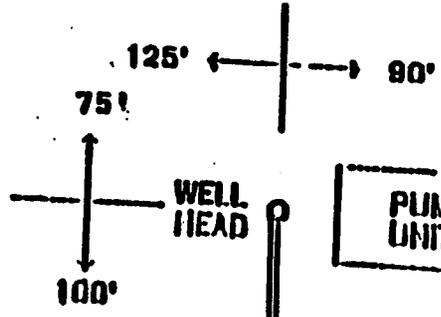

MOTOR


GAS/WATER

3-PHASE  
ELEC.

SEPARATOR

RTU  
STARTER


TRANSFORMER




RIVER GAS CORP.  
WELL SITE LAYOUT  
215' X 175'

Exhibit "E"

# TYPICAL ROAD CROSS-SECTION

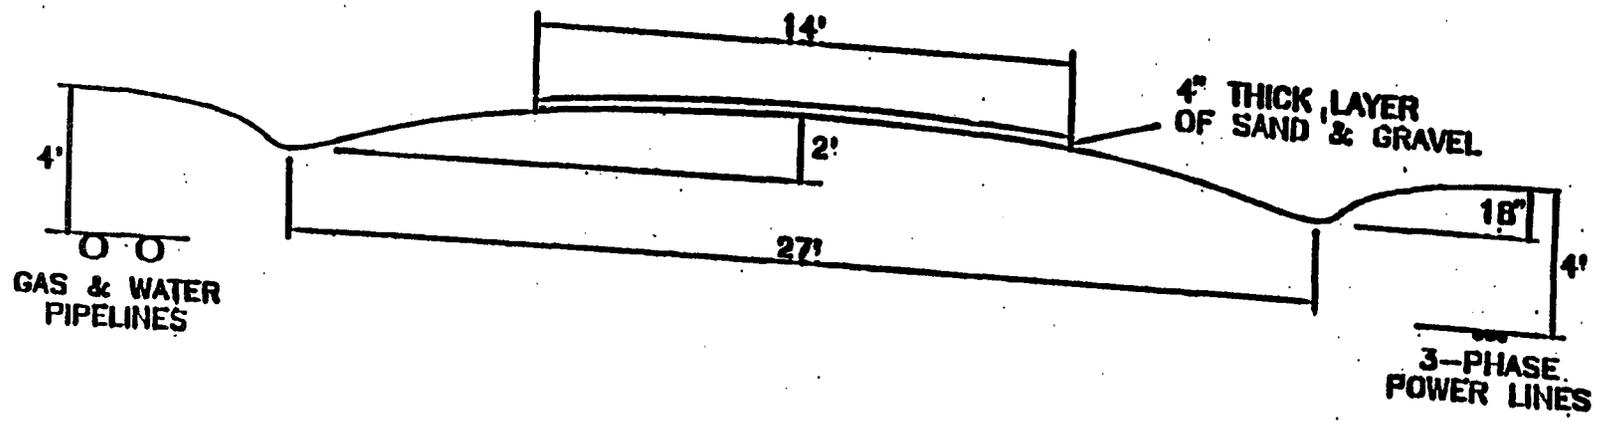


# DIVERTER HEAD

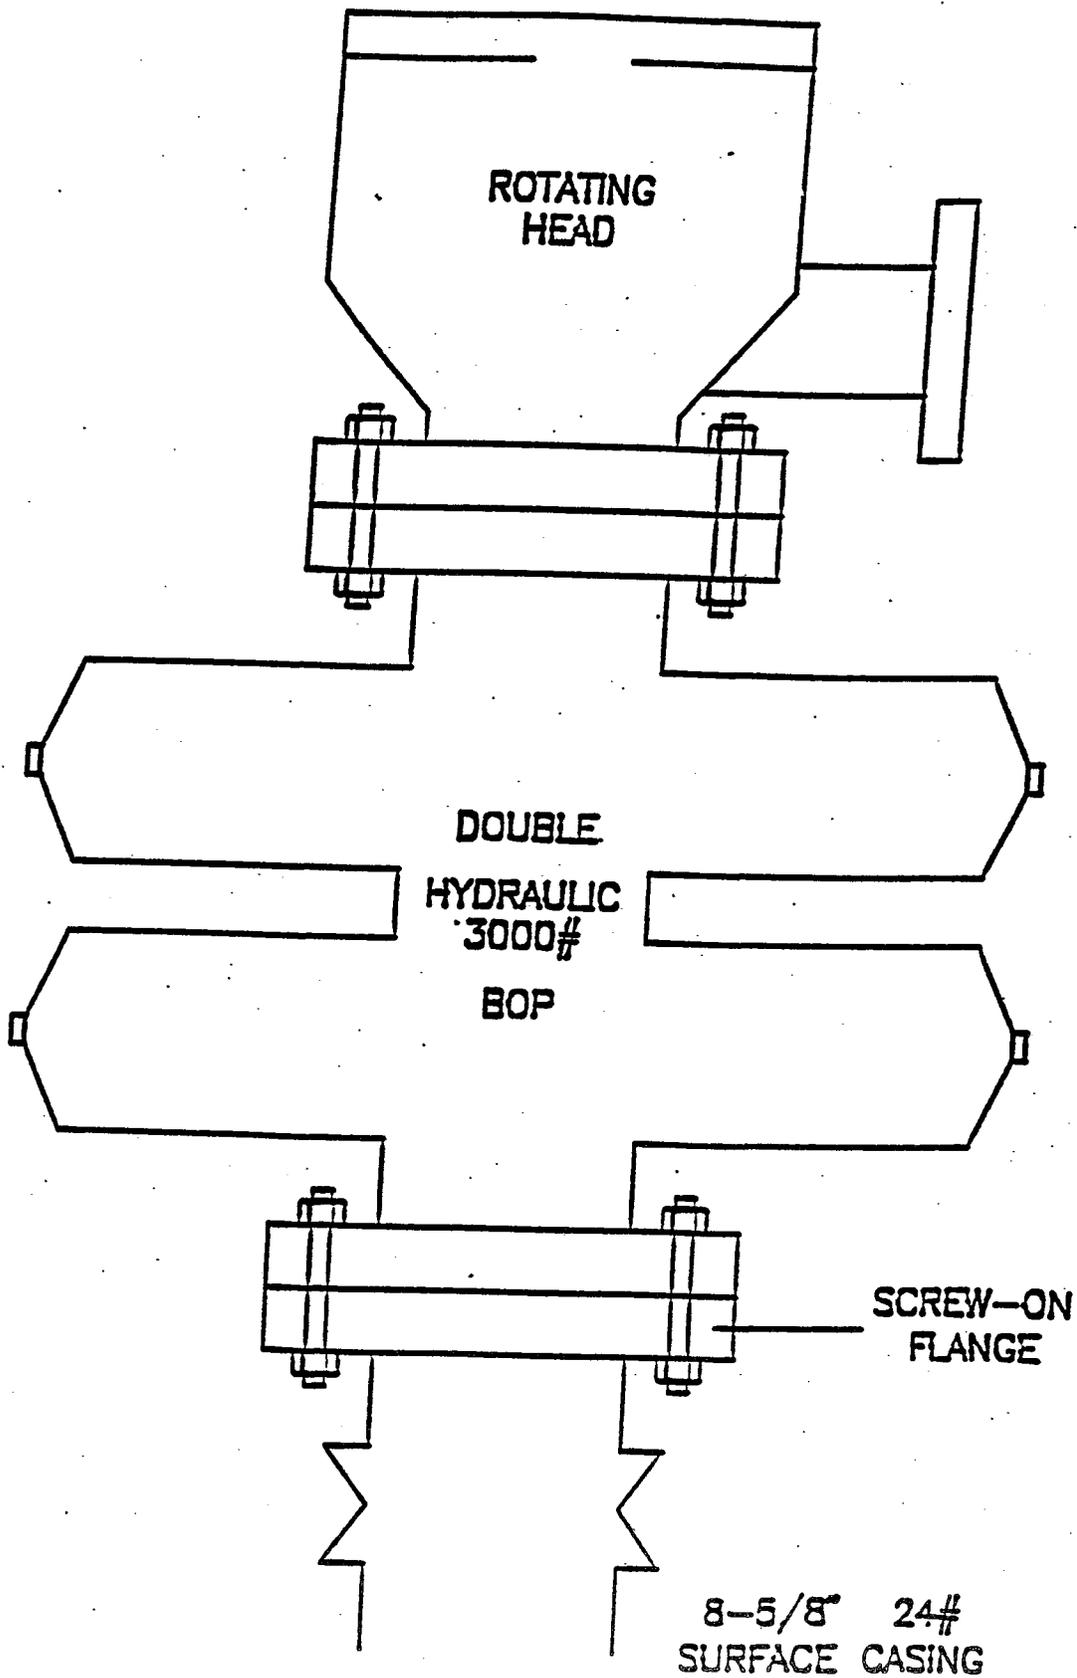

- (1) 2" 5M FLANGED CHOKE
- (2) 2" 5M GATE VALVE (FLANGED)
- (3) 2" 5M STUDDED CROSS
- (4) 2" 5M GATE VALVE (FLANGED)
- (5) 2" 5M FLANGED CHOKE
- (6) 2" 5M GATE VALVE (FLANGED)
- (7) 2" LINE
- (8) 2" 5M GATE VALVE (FLANGED)
- (9) 3000# GAUGE

NOTE:  
NUMBER 8 GATE VALVE  
SITS ON TOP OF MANIFOLD  
BETWEEN STUDDED CROSS  
AND 3000# GAUGE.

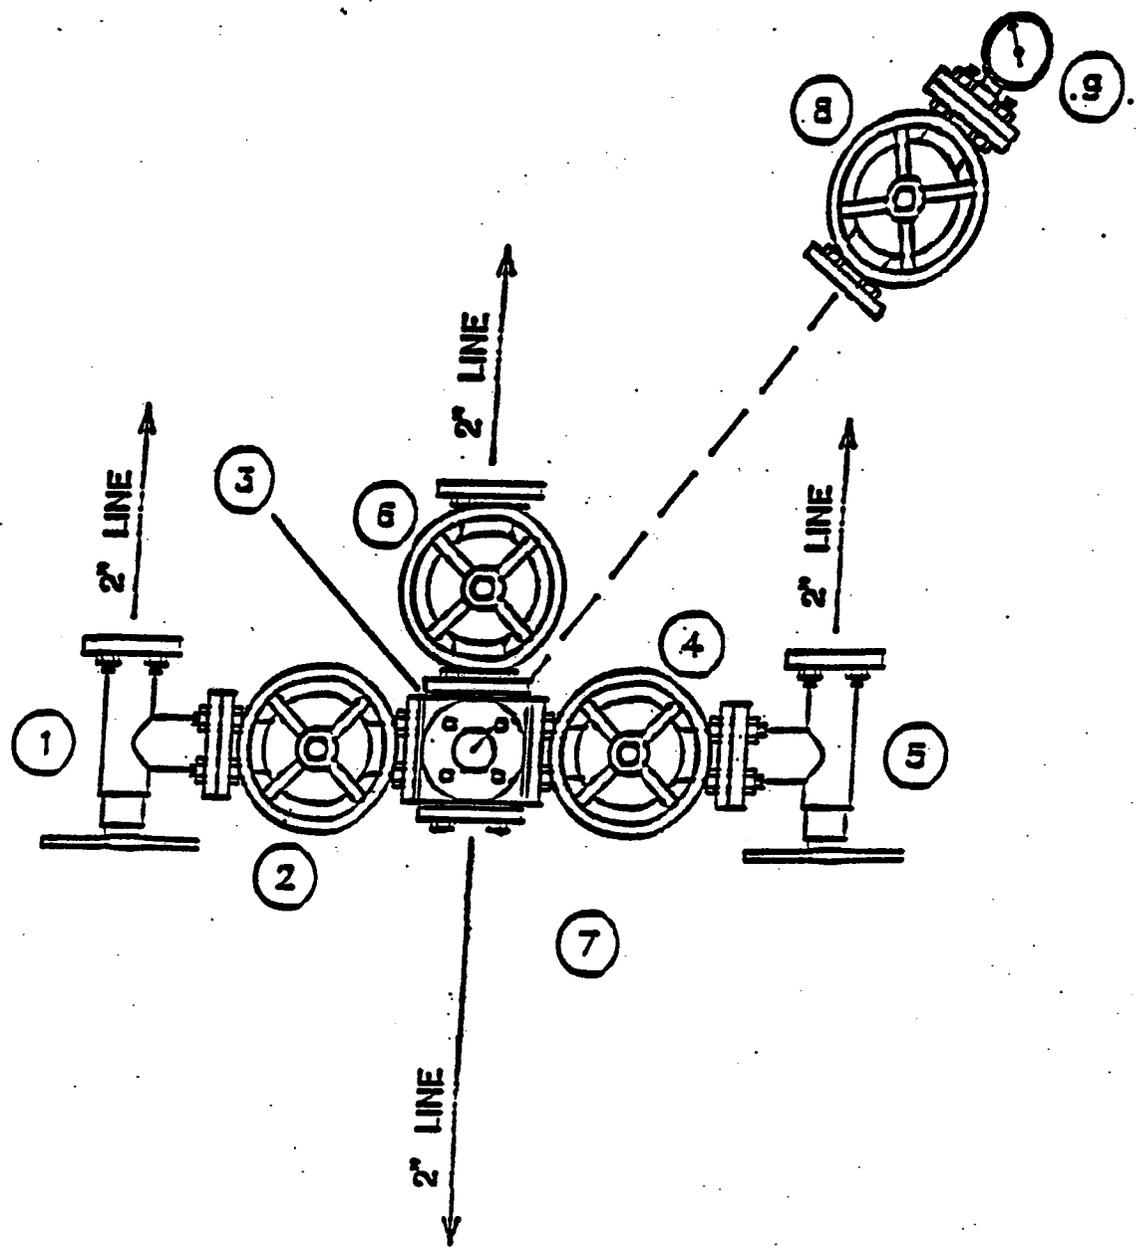

AND A NEW 2" BALL VALVE  
FULL OPEN 5000PSI

MANIFOLD

BOND NUMBER 59 52 189  
Corporate Surety Bond

STATE OF UTAH  
BOND OF LESSEE

KNOW ALL MEN BY THESE PRESENTS, that we Phillips Petroleum Company  
of Bartlesville, Oklahoma as principal and  
Safeco Insurance Company of America as surety, are held and firmly bound  
unto the State of Utah in the sum of Two Hundred Thousand Dollars (\$200,000.00) lawful money of the United States  
to be paid to the School & Institutional Trust Lands Administration, as agent for the State of Utah, for the use and benefit  
of the State of Utah, and of any patentee or purchaser of any portion of the land covered by the hereinafter described  
lease heretofore sold or which may hereafter be sold with a reservation to the State of Utah, on the surface or of other  
mineral deposits of any portion of such lands, for which payment, well and truly to be made, we bind ourselves, and each  
of us, and each of our heirs, executors, administrators, successors, sublessees, and assignees, jointly and severally by  
these presents.

Signed with our hands and seals this 31st day of January, 2001

The condition of the foregoing obligation is such that,

WHEREAS: The State of Utah, as Lessor, issued a(n) \_\_\_\_\_  
lease, Lease Number \_\_\_\_\_ and dated \_\_\_\_\_, to \_\_\_\_\_  
as lessee (and said lease has been duly assigned under date of \_\_\_\_\_  
to \_\_\_\_\_) to drill for, mine, extract, and remove all of the \_\_\_\_\_  
deposits in and under the following described lands, to wit:

Statewide Blanket Bond to cover all operations on state of Utah lands.

NOW, THEREFORE, the principal and surety shall be obligated to pay all monies, rentals, royalties, costs of  
reclamation, damages to the surface and improvements thereon and any other damages, costs, expenses, penalties, interest  
or liabilities which arise by operation of or in connection with the above described lease(s) accruing to the Lessor and  
shall fully comply with all other terms and conditions of said lease, the rules, regulations, and policies relating thereto  
of the School & Institutional Trust Lands Administration, the Board of Oil, Gas and Mining, and the Division of Oil,  
Gas and Mining as they may now exist or may from time to time be modified or amended. This obligation is in effect  
even if the principal has conveyed part of its interest to a successor in interest. If the principal fully satisfies the above  
described obligations, then the surety's obligation to make payment to the State of Utah is void and of no effect.  
otherwise, it shall remain in full force and effect until released by the School & Institutional Trust Lands Administration.

Signed, sealed and delivered  
in the presence of

Jerry L. Hicks  
Witness

PHILLIPS PETROLEUM COMPANY

R. B. Gisi (SEAL)  
R. B. Gisi Principal Asst. Treasurer

Jerry L. Hicks  
Witness

BONDING COMPANY SAFECO INSURANCE COMPANY OF AMERICA

BY Betty Miller  
Betty Miller, Attorney-in-Fact

Attest: [Signature]  
Secretary

Resident Agent: N/A

APPROVED AS TO FORM:  
JAN GRAHAM  
ATTORNEY GENERAL

By [Signature]

Bonding Co. Address: Millenium Corp. Park, Bldg. C, 18400 NE Union Hill Rd

Redmond, WA 98052  
Corporate Seal of Bonding Company Must be Affixed.



POWER OF ATTORNEY

SAFECO INSURANCE COMPANY OF AMERICA
GENERAL INSURANCE COMPANY OF AMERICA
HOME OFFICE SAFECO PLAZA
SEATTLE, WASHINGTON 98165

No. 8718

KNOW ALL BY THESE PRESENTS:

That SAFECO INSURANCE COMPANY OF AMERICA and GENERAL INSURANCE COMPANY OF AMERICA, each a Washington corporation, does each hereby appoint SANDRA L. HABERLY; BETTY J. MILLER, Bartlesville, Oklahoma

Its true and lawful attorney(s)-in-fact, with full authority to execute on its behalf fidelity and surety bonds or undertakings and other documents of a similar character issued in the course of its business, and to bind the respective company thereby.

IN WITNESS WHEREOF, SAFECO INSURANCE COMPANY OF AMERICA and GENERAL INSURANCE COMPANY OF AMERICA have each executed and attested these presents

this 27th day of September, 1993

R.A. Pierson (handwritten signature)

R.A. PIERSON, SECRETARY

W. Randall Stoddard (handwritten signature)

W. RANDALL STODDARD, PRESIDENT

CERTIFICATE

Extract from the By-Laws of SAFECO INSURANCE COMPANY OF AMERICA and of GENERAL INSURANCE COMPANY OF AMERICA:

Article V, Section 13. - FIDELITY AND SURETY BONDS ... the President, any Vice President, the Secretary, and any Assistant Vice President appointed for that purpose by the officer in charge of surety operations, shall each have authority to appoint individuals as attorneys-in-fact or under other appropriate titles with authority to execute on behalf of the company fidelity and surety bonds and other documents of similar character issued by the company in the course of its business ...

Extract from a Resolution of the Board of Directors of SAFECO INSURANCE COMPANY OF AMERICA and of GENERAL INSURANCE COMPANY OF AMERICA adopted July 28, 1970.

On any certificate executed by the Secretary or an assistant secretary of the Company setting out: (i) The provisions of Article V, Section 13 of the By-Laws, and (ii) A copy of the power-of-attorney appointment, executed pursuant thereto, and (iii) Certifying that said power-of-attorney appointment is in full force and effect, the signature of the certifying officer may be by facsimile, and the seal of the Company may be a facsimile thereof.

I, R. A. Pierson, Secretary of SAFECO INSURANCE COMPANY OF AMERICA and of GENERAL INSURANCE COMPANY OF AMERICA, do hereby certify that the foregoing extracts of the By-Laws and of a Resolution of the Board of Directors of these corporations, and of a Power of Attorney issued pursuant thereto, are true and correct, and that both the By-Laws, the Resolution and the Power of Attorney are still in full force and effect.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the facsimile seal of said corporation

this 31st day of January, 2001



R.A. Pierson (handwritten signature)

R.A. PIERSON, SECRETARY

Registered trademark of SAFECO Corporation.

**WORKSHEET  
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 05/01/2001

API NO. ASSIGNED: 43-007-30777
--------------------------------

WELL NAME: UTAH 27-520  
 OPERATOR: PHILLIPS PETROLEUM ( N1475 )  
 CONTACT: JEAN SEMBORSKI

PHONE NUMBER: 435-613-9777

PROPOSED LOCATION:  
 SESW 27 140S 080E  
 SURFACE: 1253 FSL 2033 FWL  
 BOTTOM: 1253 FSL 2033 FWL  
 CARBON  
 DRUNKARDS WASH ( 48 )

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	RAM	5/15/01
Geology		
Surface		

LEASE TYPE: 3 - State  
 LEASE NUMBER: ML-48000  
 SURFACE OWNER: 3 - State

PROPOSED FORMATION: FRSD

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[] Ind[] Sta[3] Fee[]  
(No. 5952189 )
- Potash (Y/N)
- Oil Shale (Y/N) \*190-5 (B) or 190-3
- Water Permit  
(No. PRWID )
- RDCC Review (Y/N)  
(Date: \_\_\_\_\_ )
- Fee Surf Agreement (Y/N)

LOCATION AND SITING:


- R649-2-3. Unit DRUNKARDS WASH
- R649-3-2. General  
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit  
Board Cause No: 2436  
Eff Date: 2-14-01  
Siting: 4th St. Unit Boundary & Uncomm. Lands
- R649-3-11. Directional Drill

COMMENTS: Need Resite. (5-4-01)

STIPULATIONS: ① STATEMENT OF BASIS



OPERATOR: PHILLIPS PETRO CO (N1475)  
 SEC. 27 & 34, T14S, R8E  
 FIELD: UNDESIGNATED (002)  
 COUNTY: CARBON UNIT: DRUNKARDS WASH  
 CAUSE: 243-6

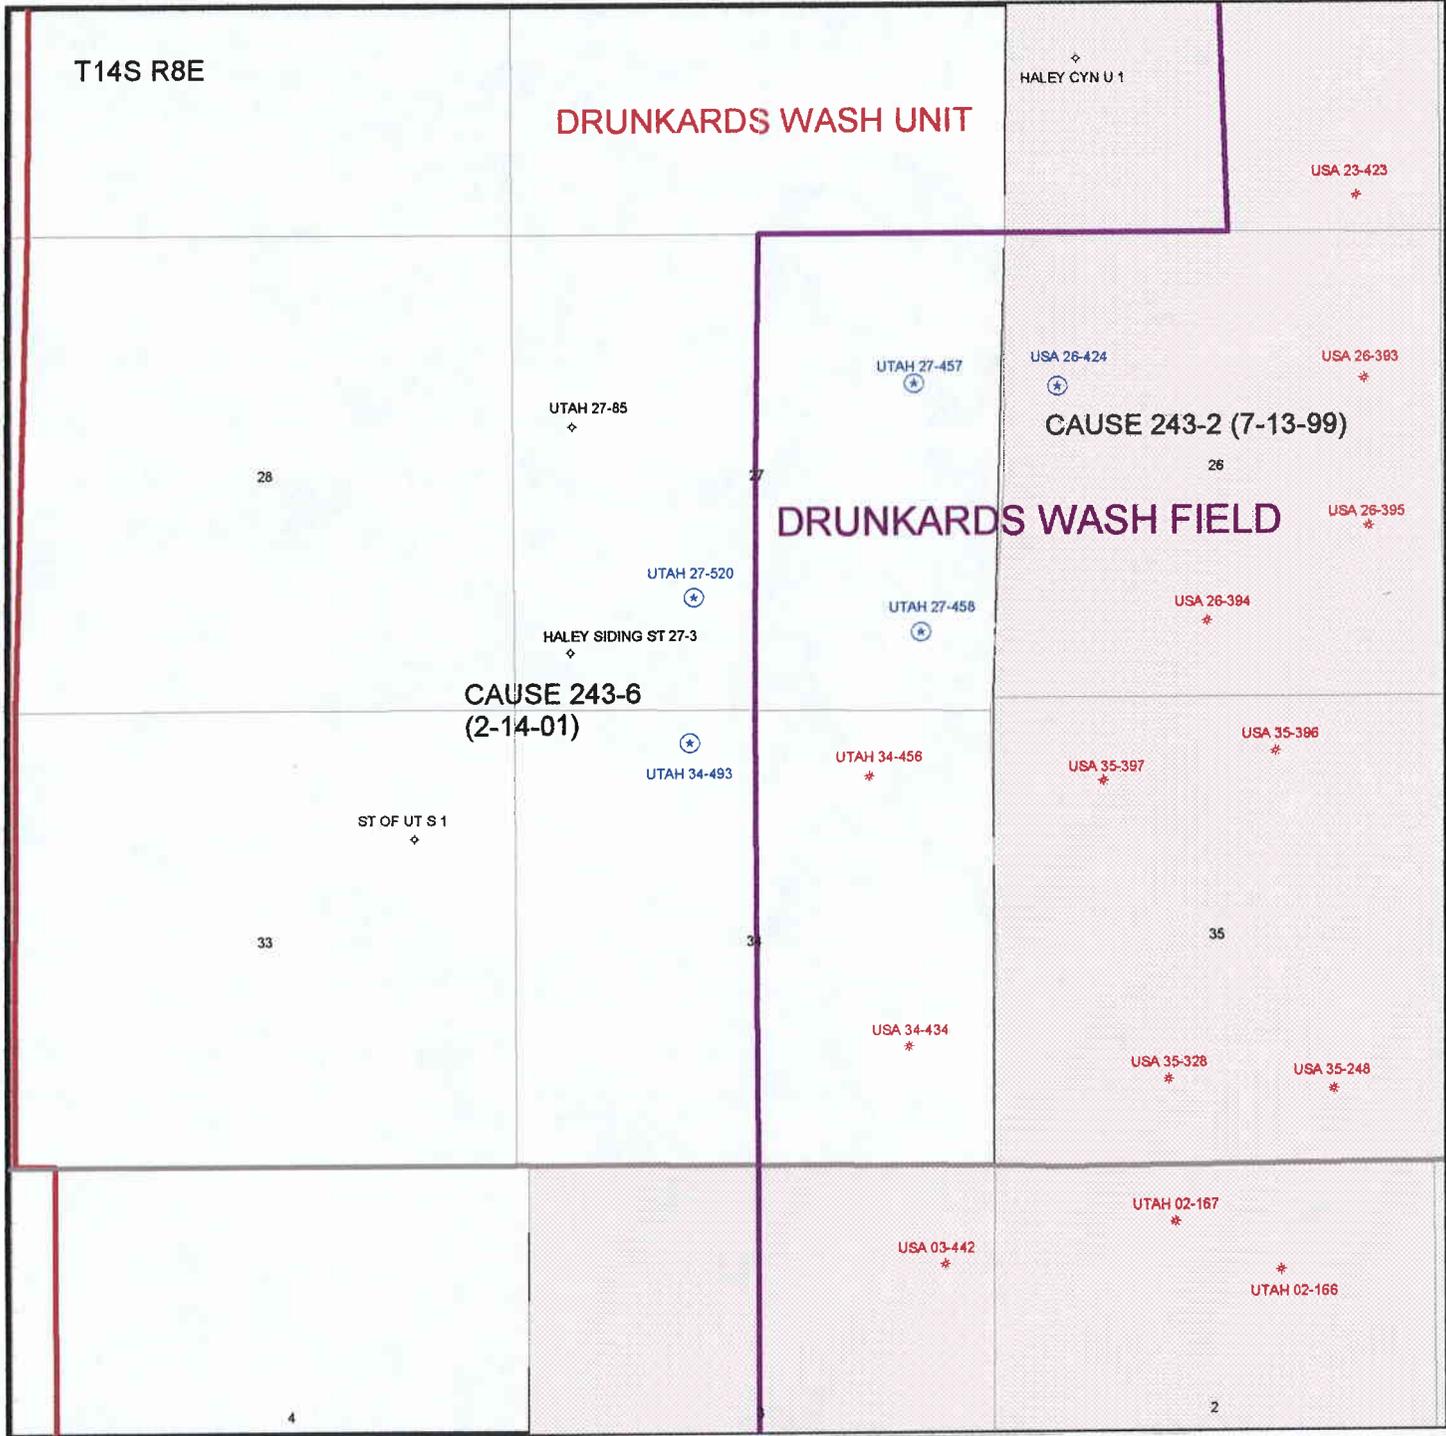

# 05-01 Phillips 27-520

## Casing Schematic

Surface

11-3/4"  
MW 8.3

8-5/8"  
MW 8.3  
Frac 19.3

TOC @ 0.  
TOC @ Conductor 40. MD

Surface  
387. MD

w/13% WASHOUT

TOC @ 957.

BOP

$$\begin{aligned} .052(8.3) 3860 &= 1666 \\ .12(3860) &< \underline{463} \\ &= \underline{1203 \text{ psi}} \end{aligned}$$

∴ 3M-RRG BOP  
ADEQUATE FOR P CONTROL.  
RAMER  
5/15/01

T FERRON  
(w+ 3370)

w/15% WASHOUT

5-1/2"  
MW 8.3

Production  
3860. MD

Well name:	<b>05-01 Phillips 27-520</b>	
Operator:	<b>Phillips Petroleum Corp.</b>	Project ID:
String type:	Production	43-007-30777
Location:	Carbon County	

**Design parameters:**

**Collapse**

Mud weight: 8.330 ppg  
 Design is based on evacuated pipe.

**Minimum design factors:**

**Collapse:**

Design factor 1.125

**Burst:**

Design factor 1.00

**Environment:**

H2S considered? No  
 Surface temperature: 65 °F  
 Bottom hole temperature: 119 °F  
 Temperature gradient: 1.40 °F/100ft  
 Minimum section length: 368 ft

Cement top: 957 ft

**Burst**

Max anticipated surface pressure: 0 psi  
 Internal gradient: 0.433 psi/ft  
 Calculated BHP 1,670 psi

No backup mud specified.

**Tension:**

8 Round STC: 1.80 (J)  
 8 Round LTC: 1.80 (J)  
 Buttress: 1.60 (J)  
 Premium: 1.50 (J)  
 Body yield: 1.50 (B)

Non-directional string.

Tension is based on air weight.  
 Neutral point: 3,372 ft

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	3860	5.5	17.00	N-80	LT&C	3860	3860	4.767	133
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	1670	6290	<u>3.77</u>	1670	7740	<u>4.63</u>	66	348	<u>5.30 J</u>

Prepared R.A.McKee  
 by: Utah Dept. of Natural Resources

Date: May 15,2001  
 Salt Lake City, Utah

**ENGINEERING STIPULATIONS: NONE**

Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.  
 Collapse is based on a vertical depth of 3860 ft, a mud weight of 8.33 ppg The casing is considered to be evacuated for collapse purposes.  
 Burst strength is not adjusted for tension.

*Engineering responsibility for use of this design will be that of the purchaser.*

Well name:	<b>05-01 Phillips 27-520</b>	
Operator:	<b>Phillips Petroleum Corp.</b>	Project ID:
String type:	Surface	43-007-30777
Location:	Carbon County	

**Design parameters:**

**Collapse**  
 Mud weight: 8.330 ppg  
 Design is based on evacuated pipe.

**Minimum design factors:**

**Collapse:**  
 Design factor 1.125

**Environment:**

H2S considered? No  
 Surface temperature: 65 °F  
 Bottom hole temperature: 70 °F  
 Temperature gradient: 1.40 °F/100ft  
 Minimum section length: 150 ft

**Burst**

Max anticipated surface pressure: 0 psi  
 Internal gradient: 0.433 psi/ft  
 Calculated BHP 167 psi

**Burst:**

Design factor 1.00

Cement top: Surface

No backup mud specified.

**Tension:**

8 Round STC: 1.80 (J)  
 8 Round LTC: 1.80 (J)  
 Buttress: 1.60 (J)  
 Premium: 1.50 (J)  
 Body yield: 1.50 (B)

Non-directional string.

**Re subsequent strings:**

Next setting depth: 3,860 ft  
 Next mud weight: 8.330 ppg  
 Next setting BHP: 1,670 psi  
 Fracture mud wt: 19.250 ppg  
 Fracture depth: 400 ft  
 Injection pressure 400 psi

Tension is based on air weight.  
 Neutral point: 339 ft

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft <sup>3</sup> )
1	387	8.625	24.00	J-55	ST&C	387	387	7.972	18.6

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	167	1370	8.18	167	2950	17.62	9	244	26.27 J

Prepared by: R.A.McKee  
 Utah Dept. of Natural Resources

Date: May 15,2001  
 Salt Lake City, Utah

ENGINEERING STIPULATIONS: NONE  
 Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.  
 Collapse is based on a vertical depth of 387 ft, a mud weight of 8.33 ppg The casing is considered to be evacuated for collapse purposes.  
 Burst strength is not adjusted for tension.

*Engineering responsibility for use of this design will be that of the purchaser.*

**DIVISION OF OIL, GAS AND MINING**

APPLICATION FOR PERMIT TO DRILL  
STATEMENT OF BASIS

**Operator Name:** Phillips Petroleum Company

**Name & Number:** Utah 27-520

**API Number:** 43-007-30777

**Location:** 1/4, 1/4 SE SW Sec. 27 T. 14S R. 8E

**Geology/Ground Water:**

The argillic, silty, poorly permeable soil is developed on the Upper Part of the Blue Gate Member of the Mancos Shale. The Garley Canyon Sandstone Beds of the Blue Gate Member of the Mancos Shale are likely to be present at this location. If the Garley Canyon Beds and the Emery Sandstone Member are present (probable) and wet (possible - standing water was found in upper Garley Canyon Beds in Pinnacle Canyon ~4 miles east), these strata should be included within the interval protected by the surface casing string. The operator is informed of the potential for wet Garley Canyon Beds and will respond to protect the zones by extending the surface casing string as needed. Extending the proposed casing and cement will adequately isolate any shallow zones containing water.

**Reviewer:** Christopher J. Kierst **Date:** 5/10/2001

**Surface:**

The area drains into Haley Canyon. Precipitation will be deflected around the location with berms and culverts. There are no nearby culinary or irrigation water supply wells. The site was photographed and characterized on 5/4/2001. Provision was made to ensure site rehabilitation, litter and waste control, preservation of drainage patterns and the integrity of local infrastructure, groundwater and other resources. The well utilities and gas gathering system will follow the approach roadway.

**Reviewer:** Christopher J. Kierst **Date:** 5/10/2001

**Conditions of Approval/Application for Permit to Drill:**

- 1) Culverts sufficient to manage expected runoff, standing and surface water in crossed drainages.
- 2) Berm location and pit.
- 3) Site infrastructure as per drilling location plat.
- 4) Native clay pit liner is acceptable.
- 5) Soil storage as per drilling location plat.
- 6) Extend surface casing as needed to contain any water in the Emery Sandstone Member and Garley Canyon Beds of Blue Gate Member of the Mancos Shale.

ON-SITE PREDRILL EVALUATION

Division of Oil, Gas and Mining

OPERATOR: Phillips Petroleum Company

WELL NAME & NUMBER: Utah 27-520

API NUMBER: 4300730777

LEASE: ML-48000 FIELD/UNIT: Drunkards Wash

LOCATION: 1/4, 1/4 SE SW Sec: 27 TWP: 14S RNG: 8E 1253' FSL 2033' FWL

LEGAL WELL SITING: 460' From Unit boundaries or uncommitted tracts.

GPS COORD (UTM): X = 498,752; Y = 4,380,370 (Surveyor UTM)

X = 498,751; Y = 4,380,364 (Garmin GPS field reading)

SURFACE OWNER: State

PARTICIPANTS

C. Kierst (DOGM), J. Semborski (RGC), L. Jensen (Nelco). E. Bonner (SITLA), D. Levanger (Carbon) and C. Colt (DWR) were informed of the proceedings but were unable to attend.

REGIONAL/LOCAL SETTING & TOPOGRAPHY

Western margin of Colorado Plateau / on the upper bench (Wiregrass Bench) about 1 mile northeast of the foot of the Wasatch Plateau, ~3 miles north of Wattis. The slope is to the northeast into the Haley Canyon drainage. The location is about ¼ mile southeast of Haley Canyon and ~10½ miles southwest of Price, Utah.

SURFACE USE PLAN

CURRENT SURFACE USE: Wildlife habitat, grazing.

PROPOSED SURFACE DISTURBANCE: 235' X 175' pad with 50' X 50' X 10' attached pit; no new access road is planned.

LOCATION OF EXISTING WELLS WITHIN A 1-MILE RADIUS: 3 APD status, 2 PGW status, 3 PA status (4300730118, 4300730065 and 300730261) and 1 NEW status Phillips Petroleum CBM locations.

LOCATION OF PRODUCTION FACILITIES AND PIPELINES: None nearby.

SOURCE OF CONSTRUCTION MATERIAL: Gravel location and approach road; soil stored in berm.

ANCILLARY FACILITIES: None

WASTE MANAGEMENT PLAN:

Portable chemical toilets which will be emptied into the municipal waste treatment system; garbage cans on location will be emptied into centralized dumpsters which will be emptied into an approved landfill. Crude oil production is unlikely. Drilling fluid, completion / frac fluid and cuttings will be buried in the pit after evaporation and slashing the pit liner. Produced water will be gathered to the evaporation pit and eventually injected into the Navajo Sandstone via a RGC-operated salt water disposal well. Used oil from drilling operations and support is hauled to a used oil recycler and reused.

#### ENVIRONMENTAL PARAMETERS

AFFECTED FLOODPLAINS AND/OR WETLANDS: The area drains into Haley Canyon, Gordon Creek Canyon and finally the Price River. By water right, a small stock reservoir may exist in NWSW of this section and there is a water right on a drainage in the NWNW of adjacent Section 34.

FLORA/FAUNA: Pinyon, juniper, grasses, mountain mahogany, cactus / rodents, birds, coyotes, elk and deer critical winter range, insects, reptiles.

SOIL TYPE AND CHARACTERISTICS: Silty, argillaceous poorly permeable soil on the Upper Part of the Blue Gate Member of the Mancos Shale.

SURFACE FORMATION & CHARACTERISTICS: Upper Part of the Blue Gate Member of the Mancos Shale (above the Emery Sandstone Member - gray, bentonitic, occasional thin-bedded sandstone bed).

EROSION/SEDIMENTATION/STABILITY: Stable

PALEONTOLOGICAL POTENTIAL: None observed.

#### RESERVE PIT

CHARACTERISTICS: 50' X 50' X 10'; dugout, earthen pit.

LINER REQUIREMENTS (Site Ranking Form attached): Native clay liner is acceptable.

#### SURFACE RESTORATION/RECLAMATION PLAN

As per Surface Owner's Agreement.

SURFACE AGREEMENT: Surface Owner's Agreement on file with state.

CULTURAL RESOURCES/ARCHAEOLOGY: Archaeological survey not done yet.

#### OTHER OBSERVATIONS/COMMENTS

#### ATTACHMENTS:

4 photographs were taken.

Christopher Kierst  
DOGM REPRESENTATIVE


5/4/2001 / 10:46 AM  
DATE/TIME

**Evaluation Ranking Criteria and Ranking  
For Reserve and Onsite Pit Liner Requirements**

<u>Site-Specific Factors</u>	<u>Ranking</u>	<u>Site Ranking</u>
Distance to Groundwater (feet)		
>200	0	
100 to 200	5	
75 to 100	10	
25 to 75	15	
<25 or recharge area	20	<u>0</u>
Distance to Surf. Water (feet)		
>1000	0	
300 to 1000	2	
200 to 300	10	
100 to 200	15	
< 100	20	<u>0</u>
Distance to Nearest Municipal Well (feet)		
>5280	0	
1320 to 5280	5	
500 to 1320	10	
<500	20	<u>0</u>
Distance to Other Wells (feet)		
>1320	0	
300 to 1320	10	
<300	20	<u>0</u>
Native Soil Type		
Low permeability	0	
Mod. permeability	10	
High permeability	20	<u>0</u>
Fluid Type		
Air/mist	0	
Fresh Water	5	
TDS >5000 and <10000	10	
TDS >10000 or Oil Base Mud	15	
Fluid containing significant levels of hazardous constituents	20	<u>0</u>
Drill Cuttings		
Normal Rock	0	
Salt or detrimental	10	<u>0</u>
Annual Precipitation (inches)		
<10	0	
10 to 20	5	
>20	10	<u>5</u>
Affected Populations		
<10	0	
10 to 30	6	
30 to 50	8	
>50	10	<u>0</u>
Presence of Nearby Utility Conduits		
Not Present	0	
Unknown	10	
Present	15	<u>0</u>
<b><u>Final Score</u></b> (level III sensitivity)		<u>5</u>

Sensitivity Level I = 20 or more total containment is required.  
Sensitivity Level II = 15-19 lining is discretionary.  
Sensitivity Level III = below 15 no specific lining is required.



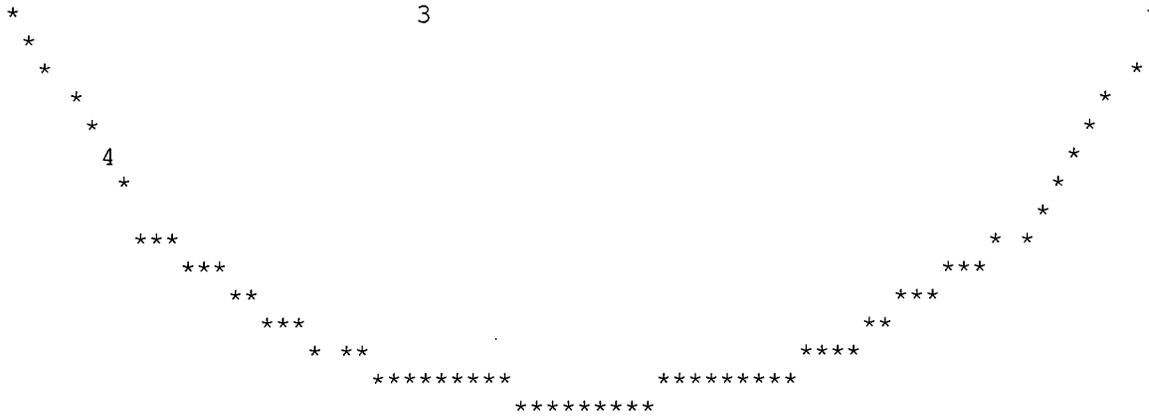

UTAH DIVISION OF WATER RIGHTS  
 NWPLAT POINT OF DIVERSION LOCATION PROGRAM

MAP CHAR	WATER RIGHT	QUANTITY CFS	AND/OR AC-FT	SOURCE DESCRIPTION or WELL INFO	POINT OF DIVERSION DESCRIPTION
				DIAMETER DEPTH YEAR LOG NORTH EAST	CNR SEC TWN RNG B&M
0	91 3102	.0000	.00	Haley Canyon Creek	
		WATER USE(S): State of Utah School & Institutional Tru 675 East 500 South, 5th Floor			PRIORITY DATE: 00/00/18 Salt Lake City
1	91 3562	.0000	.00	Haley Canyon Creek	
		WATER USE(S): State of Utah School & Institutional Tru 675 East 500 South, 5th Floor			PRIORITY DATE: 00/00/19 Salt Lake City
2	91 3560	.0000	.00	Unnamed Stream	
		WATER USE(S): State of Utah School & Institutional Tru 675 East 500 South, 5th Floor			PRIORITY DATE: 00/00/19 Salt Lake City
3	91 3559	.0000	.00	Unnamed Stream	
		WATER USE(S):			PRIORITY DATE: 00/00/19

State of Utah School & Institutional Tru 675 East 500 South, 5th Floor

Salt Lake City

4 91 3558

.0110

.00 Unnamed Spring


WATER USE(S):

State of Utah School & Institutional Tru 675 East 500 South, 5th Floor

PRIORITY DATE: 00/00/18

Salt Lake City

---

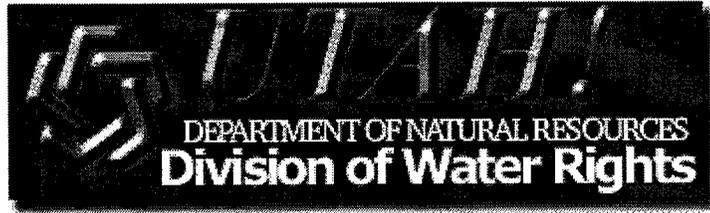

### WRPRINT Water Right Information Listing

Version: 2000.10.23.00      Rundate: 05/03/2001 10:56 AM

## Water Right 91-3558

[View Documents](#)

[WRPRINT] \*\*\*WR#: 91 3558 has been PRINTED!!  
(WARNING: Water Rights makes NO claims as to the accuracy of this data.) RUN DATE: 05/03/2001  
WRNUM: 91-3558      APPLICATION/CLAIM NO.:      CERT. NO.:

-----  
OWNERSHIP\*\*\*\*\*

NAME: State of Utah School & Institutional Trust Lands Admin      OWNER MISC:  
ADDR: 675 East 500 South, 5th Floor  
CITY: Salt Lake City      STATE: UT      ZIP: 84102      INTEREST: 100%  
LAND OWNED BY APPLICANT? Yes

-----  
DATES, ETC.\*\*\*\*\*

FILING:      /      /      | PRIORITY: 00/00/1869 | ADV BEGAN:      /      /      | ADV ENDED:      /      /      | NEWSPAPER:  
PROTST END:      /      /      | PROTESTED: [      ]      | APPR/REJ: [      ] | APPR/REJ:      /      /      | PROOF DUE:      /      /      | EXTEN  
ELEC/PROOF: [      ] | ELEC/PROOF:      /      /      | CERT/WUC: 08/28/1970 | LAP, ETC:      /      /      | PROV LETR:      /      /      | RENOV  
PD Book No. 4      Type of Right: DIL      Status:      Source of Info: PDET      Map: 62      Date Verified: 05/10/1993 I

-----  
LOCATION OF WATER RIGHT\*\*\*\*\*

FLOW: 0.011 cfs      SOURCE: Unnamed Spring  
COUNTY: Carbon      COMMON DESCRIPTION:  
POINT OF DIVERSION: ( 1) Stockwatering directly on spring located in SW>NE> Sec 33, T14S, R8E, SLBM.  
Source:

-----  
USES OF WATER RIGHT\*\*\*\*\*





State of Utah  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt  
Governor

Kathleen Clarke  
Executive Director

Lowell P. Braxton  
Division Director

1594 West North Temple, Suite 1210  
PO Box 145801  
Salt Lake City, Utah 84114-5801  
801-538-5340  
801-359-3940 (Fax)  
801-538-7223 (TDD)

May 16, 2001

Phillips Petroleum Company  
PO Box 851  
Price, UT 84501

Re: Utah 27-520 Well, 1253' FSL, 2033' FWL, SE SW, Sec. 27, T. 14 South, R. 8 East,  
Carbon County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-007-30777.

Sincerely,

*for* John R. Baza  
Associate Director

er

Enclosures

cc: Carbon County Assessor  
SITLA

**Operator:** Phillips Petroleum Company

**Well Name & Number** Utah 27-520

**API Number:** 43-007-30777

**Lease:** ML 48000

**Location:** SE SW      **Sec.** 27      **T.** 14 South      **R.** 8 East

### Conditions of Approval

1. **General**

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. **Notification Requirements**

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- 24 hours prior to cementing or testing casing
- 24 hours prior to testing blowout prevention equipment
- 24 hours prior to spudding the well
- within 24 hours of any emergency changes made to the approved drilling program
- prior to commencing operations to plug and abandon the well

The following are Division of Oil, Gas and Mining contacts and their work telephone numbers (please leave a voice mail message if the person is not available to take the call):

- Dan Jarvis at (801) 538-5338
- Carol Daniels at (801) 538-5284 (spud)

3. **Reporting Requirements**

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.

5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)

DIVISION OF OIL, GAS AND MINING

CONFIDENTIAL

SPUDDING INFORMATION

Name of Company: PHILLIPS PETROLEUM COMPANY

Well Name: UTAH 27-520

Api No. 43-007-30777 LEASE TYPE: STATE

Section 27 Township 14S Range 08E County CARBON

Drilling Contractor PENSE BROTHERS DRILLING RIG # 9

SPUDDED:

Date 09/05/2001

Time 11:00 PM

How DRY

Drilling will commence \_\_\_\_\_

Reported by FRANKIE HATHAWAY

Telephone # 1-435-613-9777

Date 09/07/2001 Signed: CHD

STATE OF UTAH  
DIVISION OF OIL, GAS AND MINING  
ENTITY ACTION FORM - FORM 6

OPERATOR Phillips Petroleum Company  
ADDRESS 6825 S. 5300 W. P.O. Box 851  
Price, UT 84501

OPERATOR ACCT. NO. 1475

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
A	99999	13308	43-007-30729	Utah 18-495	SWSW	18	15S	09E	Carbon	9/1/01	9-27-01
WELL 1 COMMENTS: New single well, new spud outside PA but inside of Unit boundary CONFIDENTIAL											
A	99999	13309	43-007-30779	USA 03-301	SWSW	03	14S	09E	Carbon	9/3/01	9-27-01
WELL 2 COMMENTS: New single well, new spud outside PA but inside of Unit boundary CONFIDENTIAL											
A	99999	13310	43-007-30730	Utah 19-496	W2NW	19	15S	09E	Carbon	9/4/01	9-27-01
WELL 3 COMMENTS: New single well, new spud outside PA and outside of Unit boundary CONFIDENTIAL											
A	99999	13311	43-007-30777	Utah 27-520	SESW	27	14S	08E	Carbon	9/5/01	9-27-01
WELL 4 COMMENTS: New single well, new spud outside PA but inside of Unit boundary CONFIDENTIAL											
A	99999	13312	43-007-30691	USA 15-422	SESE	15	15S	08E	Carbon	9/7/01	9-27-01
WELL 5 COMMENTS: New single well, new spud outside PA but inside of Unit boundary CONFIDENTIAL											

- ACTION CODES (See Instructions on back of form)
- A - Establish new entity for new well (single well only)
  - B - Add new well to existing entity (group or unit well)
  - C - Re-assign well from one existing entity to another existing entity
  - D - Re-assign well from one existing entity to a new entity
  - E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.  
(3/89)

RECEIVED

SEP 27 2001

DIVISION OF  
OIL, GAS AND MINING

Signature Frankie Hathaway  
 Title Administrative Assistant  
 Date 9/25/01  
 Phone No. (435)613-9777

STATE OF UTAH  
DIVISION OF OIL, GAS AND MINING

**CONFIDENTIAL**

5. Lease Designation and Serial Number:  
**ML-48000**

6. If Indian, Allottee or Tribe Name:  
**N/A**

7. Unit Agreement Name:  
**Drunkards Wash UTU-67921X**

8. Well Name and Number:  
**Utah 27-520**

9. API Well Number:  
**43-007-30777**

10. Field or Pool, or Wildcat:  
**Drunkards Wash**

County: **Carbon County**  
State: **Utah**

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells.  
Use APPLICATION FOR PERMIT TO DRILL OR DEEPEN form for such proposals.

1. Type of Well: **OIL**  **GAS**  **OTHER**:

2. Name of Operator:  
**Phillips Petroleum Company**

3. Address and Telephone Number:  
**6825 S. 5300 W. P.O. Box 851 Price, Utah 84501 (435) 613-9777**

4. Location of Well  
Footages: **1253' FSL, 2033' FWL**  
QQ, Sec., T., R., M.: **SE/4 SW/4 SEC. 27, T14S, R08E, SLB & M**

**11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

**NOTICE OF INTENT**  
(Submit in Duplicate)

- |  |   |
|--|---|
| <input type="checkbox"/> Abandon                   | <input type="checkbox"/> New Construction     |
| <input type="checkbox"/> Repair Casing             | <input type="checkbox"/> Pull or Alter Casing |
| <input type="checkbox"/> Change of Plans           | <input type="checkbox"/> Recomplete           |
| <input type="checkbox"/> Convert to Injection      | <input type="checkbox"/> Reperforate          |
| <input type="checkbox"/> Fracture Treat or Acidize | <input type="checkbox"/> Vent or Flare        |
| <input type="checkbox"/> Multiple Completion       | <input type="checkbox"/> Water Shut-Off       |
| <input type="checkbox"/> Other _____               |   |
- Approximate date work will start \_\_\_\_\_

**SUBSEQUENT REPORT**  
(Submit Original Form Only)

- |  |   |
|--|---|
| <input type="checkbox"/> Abandon *                           | <input type="checkbox"/> New Construction     |
| <input type="checkbox"/> Repair Casing                       | <input type="checkbox"/> Pull or Alter Casing |
| <input type="checkbox"/> Change of Plans                     | <input type="checkbox"/> Reperforate          |
| <input type="checkbox"/> Convert to Injection                | <input type="checkbox"/> Vent or Flare        |
| <input type="checkbox"/> Fracture Treat or Acidize           | <input type="checkbox"/> Water Shut-Off       |
| <input checked="" type="checkbox"/> Other <u>Spud Notice</u> |   |
- Date of work completion \_\_\_\_\_

Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION REPORT AND LOG form.  
\* Must be accompanied by a cement verification report.

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Please be advised that the Utah 27-520 well was spud on 9/5/01 at 11:00 pm.  
Pense Bros. Rig #24  
Dry Drill

**ORIGINAL**

**CONFIDENTIAL**

13. Name & Signature: **Frankie Hathaway** *Frankie Hathaway* Title: **Administrative Assistant** Date: **11/6/01**

(This space for state use only)

STATE OF UTAH  
DIVISION OF OIL, GAS AND MINING

CONFIDENTIAL

5. Lease Designation and Serial Number: ML-48000

6. If Indian, Allottee or Tribe Name: N/A

7. Unit Agreement Name: Drunkards Wash UTU-67921X

8. Well Name and Number: Utah 27-520

9. API Well Number: 43-007-30777

10. Field or Pool, or Wildcat: Drunkards Wash

County: Carbon County  
State: Utah

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells.  
Use APPLICATION FOR PERMIT TO DRILL OR DEEPEN form for such proposals.

1. Type of Well: OIL  GAS  OTHER:

2. Name of Operator: Phillips Petroleum Company

3. Address and Telephone Number: 6825 S. 5300 W. P.O. Box 851 Price, Utah 84501 (435) 613-9777

4. Location of Well Footages: 1253' FSL, 2033' FWL  
QQ, Sec., T., R., M.: SE/4 SW/4 SEC 27, T14S, R08E, SLB & M

**11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

NOTICE OF INTENT (Submit in Duplicate)	SUBSEQUENT REPORT (Submit Original Form Only)
<input type="checkbox"/> Abandon	<input type="checkbox"/> Abandon *
<input type="checkbox"/> Repair Casing	<input type="checkbox"/> Repair Casing
<input type="checkbox"/> Change of Plans	<input type="checkbox"/> Change of Plans
<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Convert to Injection
<input type="checkbox"/> Fracture Treat or Acidize	<input type="checkbox"/> Fracture Treat or Acidize
<input type="checkbox"/> Multiple Completion	<input checked="" type="checkbox"/> Other <u>Well Report</u>
<input type="checkbox"/> Other _____	Date of work completion _____
Approximate date work will start _____	
<input type="checkbox"/> New Construction	<input type="checkbox"/> New Construction
<input type="checkbox"/> Pull or Alter Casing	<input type="checkbox"/> Pull or Alter Casing
<input type="checkbox"/> Recomplete	<input type="checkbox"/> Reperforate
<input type="checkbox"/> Reperforate	<input type="checkbox"/> Vent or Flare
<input type="checkbox"/> Vent or Flare	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Water Shut-Off	

Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION REPORT AND LOG form.  
\* Must be accompanied by a cement verification report.

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

See Attached:

ORIGINAL

CONFIDENTIAL  
RECEIVED  
NOV 6 2001  
DIVISION OF  
OIL, GAS AND MINING

13. Name & Signature: Frankie Hathaway *Frankie Hathaway* Title: Administrative Assistant Date: 11/6/01

(This space for state use only)

# DRUNKARDS WASH PROJECT DAILY WELL REPORT

CONFIDENTIAL

Utah

27-520

API NO: 43-007-30777

1253' FSL, 2033' FWL

SESW SEC: 27 TWN 14S RNG 08E

SPUD TIME/DATE: 9/5/2001 11:00:00 PM

COUNTY: Carbon

TD TIME/DATE: 9/8/2001 12:00:00 PM

ELEVATION: 7102

TD DEPTH: 3945

DRILLING CONTRACTOR: Pense Brothers Rig #24

ON-LINE TIME/DATE:

## Bit Information

Type	Size	In	Out	Hours	Rotating Hours
Air Hammer	15 in	0.00	6.00	0.5	0.25
Air Hammer	11 in	6.00	420.00	5	3
Air Hammer	7 7/8	420.00	2435.00	20.5	16.5
Tri-cone	7 7/8	2435.00	3945.00	37	15.5

## Conductor Casing

Bore Hole Size: 15 in Conductor From: 0.00 To: 6.00

Casing Description: 12 3/4in PE Number of Joints: 1 Set @: 6.00

Cement: Amount:

Cement Report:

## Surface Casing

Bore Hole Size: 11 in Surface Casing From: 6.00 To: 420.00

Casing Description: 8 5/8 in 24#/ft J-55 Number of Joints: 24 Set @: 410.20

Cement: G + 2%S-1 + 1/4#/sk D-29 Amount 175.00

Cement Report: rigged up hall., safety meeting, tested lines, then pumped 175 sks of g cement, displaced with 24 bbls. Of water with 10 bbls returns, shut valve @ 7:45am, rigged down hall. Waiting on bop test. Bs

## Production Casing

Bore Hole Size: 7 7/8 in Prod.Casing From: 0.00 To: 3945.00

Casing Description: 5 1/2 in 17#/ft N-80 Number of Joints: 94 Length: 3903.00

Lead Cement 50/50 POZ, 8%D20, 10%D44, 2%S001, 1/4#/sk Amount: 385.00

Tail Cement: 10-1 RFC Amount: 90.00

Cement Report:

Float Equipment: 5 1/2 float shoe Centralizers ran on: 2,5,9,13,21,

CONFIDENTIAL

**Drilling Data**

**DAY 1 9/6/2001**

CURRENT DEPTH 420      CURRENT OPERATIONS: cement surface      ROTATING HRS: 3.25

7am-9pm no activity, 9pm-11pm moved on location & rigged up serviced rig, 11pm-12am spud in @ 11pm drilled & set 6 ft. of conductor, 12am-1am nipped up blow lines & set up to drill surface hole, 1am-3am drilling, 3am-4am td surface hole @ 420 ft. & started cleaning hole, 4am-5am tripped out & nipped up to run 8 5/8 casing, 5am-6am tripped in hole with pipe 410.2 ft., 6am-7am hooked up cementers & getting ready to pump. Bs

**Estimated Daily Cost:** [REDACTED]

**DAY 2 9/7/2001**

CURRENT DEPTH 1865      CURRENT OPERATIONS: drilling      ROTATING HRS: 11.0

7am-8am finished pumping cement & shut valve @ 8am, 8am-3pm waiting on cement to set up, 3pm-4pm broke loose, 4pm-5:30pm set bop & tested, 5:30pm-7pm changed bits & run blow line, 7pm-8pm started drilling, 8pm-11pm @ 935 ft., 11pm-2am @ 1295 ft., 2am-5am @ 1655 ft., 5am-7am @ 1865 ft. bs.

**Estimated Daily Cost:** [REDACTED]

**DAY 3 9/8/2001**

CURRENT DEPTH 3575      CURRENT OPERATIONS: drilling      ROTATING HRS: 17.0

7am-9am drilling @ 1985 ft., 9am-12pm @ 2285 ft., 12pm-1pm drilled to 2435 ft. cleaned hole & started tripping out, 1pm-3pm finished tripping out, 3pm-6:30pm changed bits to tri cone & run drill collars, 6:30pm-7:30pm drilled out fill, 7:30pm-8pm drilling @ 2495 ft., 8pm-11pm @ 2795 ft., 11pm-2am @ 3095 ft., 2am-5am @ 3425 ft., 5am-7am @ 3575 ft. bs

**Estimated Daily Cost:** [REDACTED]

**DAY 4 9/9/2001**

CURRENT DEPTH 3945      CURRENT OPERATIONS: logging well      ROTATING HRS: 5.00

7am-9am drilling @ 3665 ft., 9am-12pm td well @ 3945 ft., 12pm-1pm cleaned hole, 1pm-3pm tripped out to check valve, 3pm-5:15pm mud hole, 5:15pm-8:15pm tripped back to bottom & drilled out fill, 8:15pm-10:15pm circulated 2 hrs., 10:15pm-11:15pm short tripped, 11:15pm-1:15am on bottom circulated 2 hrs., 1:15am-5am tripped out of hole, 5am-5:30am laid down collars, 5:30am-6:30am waited on loggers, 6:30am-7am rigged up loggers. bs

**Estimated Daily Cost:** [REDACTED]

**DAY 5 9/10/2001**

CURRENT DEPTH 3945      CURRENT OPERATIONS: scraper run      ROTATING HRS: 0.00

7am-10am log well, 10am-10:30am rigged down loggers & released rig @ 10:30am, 10:30am-12pm moving rig, moved on casing rig, rigged up, set pipe racks, unloaded pipe, talley pipe, tripped in hole & landed casing @ 3903.40 ft., rigged up hall. & pumped 385 sks of lead cement, displaced with 90.5 bbls. Of water with 2 bbls. Of good cement to surface, plug down @ 10:50pm, tested plug to 2300 psi. leaked back so left 200psi on casing. rigged down hall., shut down for night. Bs

**Estimated Daily Cost:** [REDACTED]

**DAY 6 9/11/2001**

CURRENT DEPTH 3945      CURRENT OPERATIONS: finish scraper      ROTATING HRS: 0.00

set up to run 4 3/4 scraper & 2 7/8 tubing, ran 121 jts., tagged up @ 3896 ft., tripped out with 100 jts. Shut down for night.

**Estimated Daily Cost:** [REDACTED]

**DAY 7 9/12/2001**

CURRENT DEPTH 3945      CURRENT OPERATIONS: none      ROTATING HRS: 0.00

finished tripping out of hole rigged down. Bs

**Estimated Daily Cost:** [REDACTED]

DAY 8 10/9/2001

CURRENT DEPTH 0

CURRENT OPERATIONS: Perforation/Stimulation

ROTATING HRS: 0.00

Rig up Halliburton, perforate and frac three zones:

Upper Ferron: 3396'-3479'

Middle Ferron: 3499'-3568'

Lower Ferron: 3601'-3652'

MW

Estimated Daily Cost: [REDACTED]

Cum. Estimated Daily Cost: [REDACTED]

**Frac Data**

Upper Ferron: Had 3 small breaks with gentle pressure between breaks on the Nolte.

Middle Ferron: Good job.

Lower Ferron: Mechanically, job went well.

**Completion Data**

STATE OF UTAH  
DIVISION OF OIL, GAS AND MINING

5. LEASE DESIGNATION AND SERIAL NO.

ML-48000

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

N/A

7. UNIT AGREEMENT NAME

Drunkards Wash UTU-67921X

8. FARM OR LEASE NAME

Utah

9. WELL NO.

27-520

10. FIELD AND POOL, OR WILDCAT

Drunkards Wash

11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA

SE/SW, Sec 27, T14S, R08E, SLB&M

12. COUNTY

Carbon

13. STATE

Utah

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. TYPE OF WELL: OIL WELL  GAS WELL  DRY  Other \_\_\_\_\_

b. TYPE OF COMPLETION: NEW WELL  WORK OVER  DEEP-EN  PLUG BACK  DIFF. RESVR.  Other \_\_\_\_\_

2. NAME OF OPERATOR  
Phillips Petroleum Company

3. ADDRESS OF OPERATOR  
6825 S. 5300 W. P.O. Box 851 Price, Utah 84501 (435) 613-9775

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)  
At surface 1253' FSL & 2033' FWL  
At top prod. interval reported below  
At total depth

14. API NO. 43-007-30777  
DATE ISSUED 5/16/01

15. DATE SPUNDED 9/5/01  
16. DATE T.D. REACHED 9/8/01  
17. DATE COMPL. 10/10/01 (Ready to or Plug & Abd.)  
18. ELEVATIONS (DF, REB, RT, GR, ETC.) 7102'  
19. ELEV. CASINGHEAD N/A

20. TOTAL DEPTH, MD & TVD 3945'  
21. PLUG BACK T.D., MD & TVD 3903'  
22. IF MULTIPLE COMPL., HOW MANY N/A  
23. INTERVALS DRILLED BY  
ROTARY TOOLS to TD  
CABLE TOOLS N/A

24. PRODUCING INTERVAL(S), OF THIS COMPLETION--TOP, BOTTOM, NAME (MD OR TVD)  
Ferron Coal - Top Coal 3396' & Bottom Coal 3652'  
25. WAS DIRECTIONAL SURVEY MADE

26. TYPE ELECTRIC AND OTHER LOGS RUN  
Dual Induction, Laterolog, SFF, Caliper, Comp Density & Neutron

27. WAS WELL CORED YES  NO   
DRILL STEM TEST YES  NO  (Submit analysis) (See reverse side)

28. CASING RECORD (Report all strings set in well)

CASING SIZE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	CEMENT RECORD	AMOUNT PULLED
12 3/4"	Conductor	6'	15"	175 sks Class G, 2%, 4% Gell & 1/4#/sk Flocel	
8 5/8"	JSS 24#	410'	11"	385 sks 50/50 POZ, 8% D-20, 10% D-44, 2% S-1	
5 1/2"	N80 17#	3903'	7 7/8"	90 sks 10-1 RFC (Thixotropic)	

29. LINER RECORD				30. TUBING RECORD			
SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET
					2-7/8"	3754'	N/A

31. PERFORATION RECORD (Interval, size and number)		32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.	
Interval	Size	DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
Upper: 3406'-3404', 3429'-3431', 3442'-3446', 3449'-3454', 3466'-3472', 3476'-3479'	4spf .88"	Upper 3396'-3479'	15,300#, 20/40; 55,200#, 16/30; 35,460 gal fluid
Middle: 3499'-3504', 3508'-3512', 3545'-3548', 3553'-3555', 3566'-3568'	4spf .88"	Middle 3499'-3568'	10,000#, 20/40; 60,000#, 16/30; 33,389 gal fluid
Lower: 3601'-3602', 3606'-3607', 3620'-3628', 3648'-3652'	4spf .88"	Lower 3601'-3652'	20,000#, 20/40; 70,000#. 16/30; 39,334 gal fluid

33. PRODUCTION

DATE FIRST PRODUCTION	PRODUCTION METHOD (Flowing, gas lift, pumping--size and type of pump)	WELL STATUS (Producing or shut-in)					
10/18/01	Pumping - 2 1/2" x 2" x 16' RWAC	Producing					
DATE OF TEST	HOURS TESTED	CHOKE SIZE	PROD'N. FOR TEST PERIOD	OIL---BBL.	GAS---MCF.	WATER---BBL.	GAS-OIL RATIO
10/18/01	24hrs.	-----		N/A	33	27	0.27
FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE	OIL---BBL.	GAS---MCF.	WATER---BBL.	OIL GRAVITY (P.C.P.R.)	
12	11		N/A	33	527		N/A

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)  
TEST WITNESSED BY  
SOLD Jerry H. Dietz

35. LIST OF ATTACHMENTS

36 I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED Jean Semborski TITLE Permitting Analyst DATE 12/13/01

CONFIDENTIAL

ORIGINAL

WELL NUMBER: Utah 27-520

37 SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals; and all drill-stem tests, including depth interval tested, cushion used, flowing and shut-in pressures, and recoveries).		38. GEOLOGIC MARKERS	
FORMATION	TOP	NAME	TOP MEAS. DEPTH
	BOTTOM		TRUE VERT. DEPTH
Ferron	3442'	Blue Gate Bentonite	3231'
	3628'	Tununk Shale	3762'
		Ferron Sandston	3368'
DESCRIPTION, CONTENTS, ETC. Coals and Sandstones Coal Interval: 3442'-3628'			

ORIGINAL

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells. Use APPLICATION FOR PERMIT TO DRILL OR DEEPEN form for such proposals.

1. Type of Well: OIL  GAS  OTHER:

2. Name of Operator: Phillips Petroleum Company

3. Address and Telephone Number: 6825 South 5300 West, P.O. Box 851, Price, UT 84501 (435) 613-9777

4. Location of Well Footages: 1253' FSL, 2033' FWL  
QQ, Sec., T., R., M.: SE/SW, Sec.27, T14S, R08E, SLB&M

5. Lease Designation and Serial Number:

ML-48000

6. If Indian, Allottee or Tribe Name:

N/A

7. Unit Agreement Name:

UTU67921X Drunkards Wash

8. Well Name and Number:

UT 27-520

9. API Well Number:

43-007-30777

10. Field or Pool, or Wildcat:

Drunkards Wash

County: Carbon County

State: Utah

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

NOTICE OF INTENT (Submit in Duplicate)

- Abandon, Repair Casing, Change of Plans, Convert to Injection, Fracture Treat or Acidize, Multiple Completion, Other, New Construction, Pull or Alter Csg, Recomplete, Reperforate, Vent or Flare, Water Shut-Off

SUBSEQUENT REPORT (Submit Original Form Only)

- Abandon \*, Repair Casing, Change of Plans, Convert to Injection, Fracture Treat or Acidize, Other (checked) Chemical/Flush Treatment, New Construction, Pull or Alter Csg, Reperforate, Vent or Flare, Water Shut-Off

Date of work completion 02/14/02

Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION REPORT AND LOG form.

\* Must be accompanied by a cement verification report.

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Please be advised that the above referenced well was chemically treated with 4000 gallons of low Ph fluid & 250 gallons of 15% HCL on 02/14/02.

RECEIVED

FEB 25 2002

DIVISION OF OIL, GAS AND MINING

13.

Name & Signature: Lynnette Allred

[Handwritten Signature]

Title: Administrative Assistant

Date: 02/20/02

(This space for state use only)

STATE OF UTAH  
DIVISION OF OIL, GAS AND MINING

ORIGINAL

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells.  
Use APPLICATION FOR PERMIT TO DRILL OR DEEPEN form for such proposals.

1. Type of Well: OIL  GAS  OTHER:  **CONFIDENTIAL**

2. Name of Operator: Phillips Petroleum Company

3. Address and Telephone Number: 6825 South 5300 West, P.O. Box 851, Price, UT 84501 (435) 613-9777

4. Location of Well Footages: 1253' FSL, 2033' FWL  
County: Carbon County  
QQ, Sec., T., R., M.: SE/SW, SEC. 27, T14S, R08E, SLB & M  
State: Utah

5. Lease Designation and Serial Number: ML-48000

6. If Indian, Allottee or Tribe Name: N/A

7. Unit Agreement Name: UTU67921X Drunkards Wash

8. Well Name and Number: UTAH 27-520

9. API Well Number: 43-007-30777

10. Field or Pool, or Wildcat: Drunkards Wash

**11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

**NOTICE OF INTENT**  
(Submit in Duplicate)

- Abandon
  - Repair Casing
  - Change of Plans
  - Convert to Injection
  - Fracture Treat or Acidize
  - Multiple Completion
  - Other \_\_\_\_\_
- Approximate date work will start \_\_\_\_\_

- New Construction
- Pull or Alter Csg
- Recomplete
- Reperforate
- Vent or Flare
- Water Shut-Off

**SUBSEQUENT REPORT**  
(Submit Original Form Only)


- Abandon \*
  - Repair Casing
  - Change of Plans
  - Convert to Injection
  - Fracture Treat or Acidize
  - Other Chemical/Flush Treatment
- Date of work completion 04/24/02

Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION REPORT AND LOG form.

\* Must be accompanied by a cement verification report.

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Please be advised that the above referenced well was chemically treated with 4000 gallons of low Ph fluid & 250 gallons of 4% HCL on 04/24/02.

13. Name & Signature: Lynnette Allred  Title: Administrative Assistant Date: 05/01/02

(This space for state use only)

**RECEIVED**

MAY 06 2002

DIVISION OF  
OIL, GAS AND MINING



9780 Ut. Pyramid Dr. Ste. 200  
Englewood, UT 84112

Divisions of Oil, Gas, and Mining  
Attn: Mr. John Baza  
1594 West North Temple,  
Suite 1210, P. O. Box 145801  
Salt Lake City, UT 84114-5801

Re: Notice of Address Change, Merger and Name Change  
Address Change effective **December 2, 2002**  
Merger and Name Change effective **December 31, 2002**

Gentlemen:

1. Effective December 2, 2002, Phillips Petroleum Company will close its Englewood, Colorado Rocky Mountain Region office. After that time, all correspondence, notices and invoice for Land related matters should be directed to the address(es) noted below. Note that until December 31, 2002, all properties in which Phillips held an interest will continue to be operated by Phillips Petroleum Company, a wholly-owned subsidiary of ConocoPhillips.
2. On December 31, 2002, Phillips Petroleum Company and Conoco Inc. will merge, and the surviving corporation will be renamed "ConocoPhillips Company".

In accordance with the notice provisions of the Operating Agreements and other agreements, if any, between our companies, please adjust your company/organization records, effective for address purposes as of December 2, 2002, and for company name purposes, as of January 1, 2003, to reflect the following information for addressing and delivery of notices, invoicing and payment, and communications with ConocoPhillips Company. This will also apply to Lease Sale notices and other lease-related correspondence and notifications.

**U.S. Mail Address:**

ConocoPhillips Company  
P.O. Box 2197  
Houston, Texas 77252  
Attn: Chief Landman,  
San Juan/Rockies

**Physical Address & Overnight Delivery:**

ConocoPhillips Company  
550 Westlake Park Blvd.  
Three Westlake Park  
3WL, Room WL 9000  
Houston, Texas 77079  
Attn: Chief Landman,  
San Juan/Rockies

**All ballots and official notices/responses sent by facsimile transmission should be sent to the following contact:**

**Attn: Chief Landman,  
San Juan/Rockies**

**Fax No.: 832-486-2688 or  
832-486-2687**

Please contact the undersigned immediately if you have any questions. This notice does not apply to royalty inquiries, joint interest billings, or revenue remittances. Please continue to use the same addresses you are currently using for these matters

Sincerely,

**RECEIVED**

**DEC 02 2002**

**DIVISION OF  
OIL, GAS AND MINING**

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

		5. LEASE DESIGNATION AND SERIAL NUMBER:
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <u>All</u>		8. WELL NAME and NUMBER: <b>See Attached List</b>
2. NAME OF OPERATOR: <b>Phillips Petroleum Company</b>		9. API NUMBER: <b>See List</b>
3. ADDRESS OF OPERATOR: <b>980 Plaza Office</b> CITY <b>Bartlesville</b> STATE <b>OK</b> ZIP <b>74004</b>		10. FIELD AND POOL, OR WILDCAT:
4. LOCATION OF WELL FOOTAGES AT SURFACE: <b>See Attached List</b>		COUNTY:
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		STATE: <b>UTAH</b>

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.


Conoco Inc. was merged into Phillips Petroleum Company, the surviving corporation, on December 31, 2002. In connection with this merger and effective on the same date, the name of the surviving corporation was changed to "ConocoPhillips Company". We are requesting that a new Operator Number be assigned to ConocoPhillips Company.

Please send production reporting forms to Herb Henderson at ConocoPhillips Company, 315 S. Johnstone, 980 Plaza Office, Bartlesville, OK 74004. Herb's phone number is 918-661-4415.

Current Operator  
Phillips Petroleum Company

  
Steve de Albuquerque

New Operator  
ConocoPhillips Company

  
Yolanda Perez

**RECEIVED**

**JAN 08 2003**

DIV. OF OIL, GAS & MINING

NAME (PLEASE PRINT) <u>Yolanda Perez</u>	TITLE <u>Sr. Regulatory Analyst</u>
SIGNATURE 	DATE <u>12/30/2002</u>

(This space for State use only)




## SECRETARY'S CERTIFICATE

I, the undersigned, Jennifer M. Garcia, Assistant Secretary of ConocoPhillips Company, formerly Phillips Petroleum Company, organized and existing under and by virtue of the laws of the State of Delaware (the "Corporation"), hereby certify that:

1. As Assistant Secretary I am authorized to execute this certificate on behalf of the Corporation.
2. The attached photocopy of the Certificate of Amendment to the Restated Certificate of Incorporation of Phillips Petroleum Company (to be renamed ConocoPhillips Company) is a true and correct copy as filed in the office of the Secretary of State of Delaware on the 12<sup>th</sup> day of December 2002, with an effective date of January 1, 2003 and such Certificate of Amendment has not been modified, amended, rescinded or revoked and is in full force and effect as of the date hereof.
3. The attached photocopy of the Certificate of Merger of Conoco Inc. with and into ConocoPhillips Company is a true and correct copy as filed in the office of the Secretary of State of Delaware on the 12<sup>th</sup> day of December 2002, with an effective date of December 31, 2002 and such Certificate of Merger has not been modified, amended, rescinded or revoked and is in full force and effect as of the date hereof.

IN WITNESS WHEREOF, I have hereunto set my hand as Assistant Secretary and affixed the corporate seal of the Corporation this 7th day of January 2003.

  
 Assistant Secretary  
 ConocoPhillips Company

STATE OF TEXAS           §  
                                      §  
 COUNTY OF HARRIS       §

This instrument was acknowledged before me on January 7, 2003, by Jennifer M. Garcia, Assistant Secretary of ConocoPhillips Company, a Delaware corporation, on behalf of said Corporation.



RECEIVED  
 JAN 08 2003

  
 Notary Public

# Delaware

PAGE 1

*The First State*


I, HARRIET SMITH WINDSOR, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF AMENDMENT OF "PHILLIPS PETROLEUM COMPANY", CHANGING ITS NAME FROM "PHILLIPS PETROLEUM COMPANY" TO "CONOCOPHILLIPS COMPANY", FILED IN THIS OFFICE ON THE TWELFTH DAY OF DECEMBER, A.D. 2002, AT 1:41 O'CLOCK P.M.

AND I DO HEREBY FURTHER CERTIFY THAT THE EFFECTIVE DATE OF THE AFORESAID CERTIFICATE OF AMENDMENT IS THE THIRTY-FIRST DAY OF DECEMBER, A.D. 2002, AT 11 O'CLOCK P.M.

RECEIVED

JAN 08 2003

DIV. OF OIL, GAS & MINING



0064324 8100

030002793

*Harriet Smith Windsor*

Harriet Smith Windsor, Secretary of State

AUTHENTICATION: 2183360

DATE: 01-02-03

**CERTIFICATE OF AMENDMENT**

to the

**RESTATED CERTIFICATE OF INCORPORATION**

of

**PHILLIPS PETROLEUM COMPANY  
(to be renamed ConocoPhillips Company)**

Phillips Petroleum Company ("Phillips"), a corporation organized and existing under the General Corporation Law of the State of Delaware (the "DGCL"), hereby certifies that:

1. The amendments to Phillips' Restated Certificate of Incorporation set forth below were duly adopted in accordance with the provisions of Section 242 of the DGCL and have been consented to in writing by the sole stockholder of Phillips in accordance with Section 228 of the DGCL.

2. Phillips' Restated Certificate of Incorporation is hereby amended by deleting Article I thereof and replacing in lieu thereof a new Article I reading in its entirety as follows:

"The name of the corporation (which is hereinafter referred to as the "Corporation") is ConocoPhillips Company."

3. Phillips' Restated Certificate of Incorporation is hereby amended by deleting Section 1 of Article IV thereof and replacing in lieu thereof a new Section 1 reading in its entirety as follows:

"Section 1. The Corporation shall be authorized to issue 2,100 shares of capital stock, of which 2,100 shares shall be shares of Common Stock, \$.01 par value ("Common Stock")."

4. Pursuant to Section 103(d) of the DGCL, this amendment will become effective at 11:00 p.m., Eastern time, on December 31, 2002.


**RECEIVED**

**JAN 08 2003**

DIV. OF OIL, GAS & MINING

IN WITNESS WHEREOF, Phillips has caused this certificate to be executed this  
12th day of December, 2002.

PHILLIPS PETROLEUM COMPANY

By:   
Name: Rick A. Harrington  
Title: Senior Vice President, Legal,  
and General Counsel

RECEIVED  
JAN 08 2003  
DIV. OF OIL, GAS & MINING

# Delaware

PAGE 1

*The First State*

I, HARRIET SMITH WINDSOR, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF MERGER, WHICH MERGES:

"CONOCO INC.", A DELAWARE CORPORATION,


WITH AND INTO "CONOCOPHILLIPS COMPANY" UNDER THE NAME OF "CONOCOPHILLIPS COMPANY", A CORPORATION ORGANIZED AND EXISTING UNDER THE LAWS OF THE STATE OF DELAWARE, AS RECEIVED AND FILED IN THIS OFFICE THE TWELFTH DAY OF DECEMBER, A.D. 2002, AT 1:44 O'CLOCK P.M.

AND I DO HEREBY FURTHER CERTIFY THAT THE EFFECTIVE DATE OF THE AFORESAID CERTIFICATE OF MERGER IS THE THIRTY-FIRST DAY OF DECEMBER, A.D. 2002, AT 11:59 O'CLOCK P.M.

RECEIVED

JAN 08 2003

DIV. OF OIL, GAS & MINING



*Harriet Smith Windsor*

Harriet Smith Windsor, Secretary of State

AUTHENTICATION: 2183370

0064324 8100M

030002793

DATE: 01-02-03

**CERTIFICATE OF MERGER**

of

**Conoco Inc.**  
(a Delaware corporation)

with and into

**ConocoPhillips Company**  
(a Delaware corporation)

Phillips Petroleum Company, a Delaware corporation to be renamed ConocoPhillips Company prior to the effective time of this certificate of merger (the "Surviving Corporation"), in compliance with the requirements of the General Corporation Law of the State of Delaware (the "DGCL") and desiring to effect a merger of Conoco Inc., a Delaware corporation formerly incorporated under the name Du Pont Holdings, Inc. (the "Merging Corporation," and together with the Surviving Corporation, the "Constituent Corporations"), with and into the Surviving Corporation, and acting by its duly authorized officer, DOES HEREBY CERTIFY that:

**First:** As of the date hereof, the name and state of incorporation of each of the Constituent Corporations of the merger are as follows:

<u>NAME</u>	<u>STATE OF INCORPORATION</u>
PHILLIPS PETROLEUM COMPANY	Delaware
CONOCO INC.	Delaware

**Second:** An agreement and plan of merger has been approved, adopted, certified, executed and acknowledged by each of the Constituent Corporations in accordance with the requirements of Section 251 of the DGCL;

**Third:** The name of the Surviving Corporation will be ConocoPhillips Company;

**Fourth:** The Certificate of Incorporation of ConocoPhillips Company immediately prior to the merger shall be the Certificate of Incorporation of the Surviving Corporation until such time as it may be amended in accordance with applicable law and the provisions thereof;

**Fifth:** The executed agreement and plan of merger is on file at an office of the Surviving Corporation, the address of which is 600 North Dairy Ashford, Houston, Texas 77079;

RECEIVED

JAN 08 2003


DIV. OF OIL, GAS & MINING

**Sixth:** A copy of the agreement and plan of merger will be furnished by the Surviving Corporation, on request and without cost, to any stockholder of any Constituent Corporation; and

**Seventh:** Pursuant to Section 103(d) of the DGCL, this certificate of merger will become effective at 11:59 p.m., Eastern time, on December 31, 2002.

Dated: December 12, 2002

**PHILLIPS PETROLEUM COMPANY**  
(a Delaware corporation)

WJ  
By:   
Name: Rick A. Harrington  
Title: Senior Vice President, Legal,  
and General Counsel

RECEIVED  
JAN 08 2003  
DIV. OF OIL, GAS & MINING

STATE OF UTAH  
DEPARTMENT OF COMMERCE  
REGISTRATION

CONOCOPHILLIPS COMPANY

EFFECTIVE  
06/14/1946

EXPIRATION  
\*RENEWAL

REFERENCE NUMBER(S), CLASSIFICATION(S) & DETAIL(S)

Corporation - Foreign - Profit  
562960-0143

UNITED STATES CORP CO  
CONOCOPHILLIPS COMPANY  
GATEWAY TOWER EAST STE 900  
10 EAST SOUTH TEMPLE  
SLC UT 84133

RECEIVED

JAN 08 2003

DIV. OF OIL, GAS & MINING

STATE OF UTAH  
DEPARTMENT OF COMMERCE  
DIVISION OF CORPORATIONS & COMMERCIAL CODE  
REGISTRATION

EFFECTIVE DATE: 06/14/1946  
EXPIRATION DATE: \*RENEWAL  
ISSUED TO: CONOCOPHILLIPS COMPANY



REFERENCE NUMBER(S), CLASSIFICATION(S) & DETAIL(S)

562960-0143 Corporation - Foreign - Profit

\*RENEWAL

You will need to renew your registration each anniversary date of the effective date.

Exceptions: DBAs and Business Trusts renew every three (3) years from the effective date.

## Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twpr	Twpr	Rngn	Rngd
43-007-30887-00-00	ANDREEN 32-529	Gas Well	APD	32	14	S	10	E
43-007-30865-00-00	COTNER 29-549	Gas Well	APD	29	14	S	10	E
43-007-30837-00-00	DALLIN 32-615	Gas Well	APD	32	13	S	9	E
43-047-34551-00-00	FED 43-24-3 #1	Gas Well	APD	24	10	S	17	E
43-047-33982-00-00	FEDERAL 12-17 #1	Gas Well	APD	17	10	S	18	E
43-047-34471-00-00	FEDERAL 12-29-7 1	Gas Well	APD	29	9	S	19	E
43-047-34472-00-00	FEDERAL 31-31-6 1	Gas Well	APD	31	9	S	19	E
43-007-30864-00-00	MCKENDRICK 29-548	Gas Well	APD	29	14	S	10	E
43-015-30512-00-00	PPCO 19-379	Gas Well	APD	19	16	S	9	E
43-015-30515-00-00	PPCO 24-562	Gas Well	APD	24	16	S	8	E
43-015-30548-00-00	PPCO 30-605	Gas Well	APD	30	16	S	9	E
43-007-30888-00-00	PRICE 32-438	Gas Well	APD	32	14	S	10	E
43-007-30813-00-00	RITZAKIS 33-514	Gas Well	APD	33	13	S	9	E
43-007-30766-00-00	RITZAKIS 33-516	Gas Well	APD	33	13	S	9	E
43-007-30838-00-00	ROWLEY 32-616	Gas Well	APD	32	13	S	9	E
43-007-30863-00-00	SCHMIDT 29-531	Gas Well	APD	29	14	S	10	E
43-007-30797-00-00	SEELY 15-498	Gas Well	APD	15	14	S	8	E
43-007-30798-00-00	SEELY 15-499	Gas Well	APD	15	14	S	8	E
43-007-30799-00-00	SEELY 15-500	Gas Well	APD	15	14	S	8	E
43-007-30796-00-00	SEELY 22-492	Gas Well	APD	22	14	S	8	E
43-007-30801-00-00	SEELY 22-502	Gas Well	APD	22	14	S	8	E
43-007-30802-00-00	SEELY 22-503	Gas Well	APD	22	14	S	8	E
43-007-30711-00-00	USA 09-452	Gas Well	APD	9	15	S	8	E
43-015-30351-00-00	USA 11-313	Gas Well	APD	11	16	S	9	E
43-015-30398-00-00	USA 12-385	Gas Well	APD	12	16	S	9	E
43-015-30409-00-00	USA 12-426	Gas Well	APD	12	16	S	9	E
43-007-30805-00-00	USA 14-490	Gas Well	APD	14	14	S	8	E
43-007-30806-00-00	USA 14-491	Gas Well	APD	14	14	S	8	E
43-007-30676-00-00	USA 15-421	Gas Well	APD	15	15	S	8	E
43-015-30417-00-00	USA 21-427	Gas Well	APD	21	16	S	9	E
43-015-30416-00-00	USA 21-428	Gas Well	APD	21	16	S	9	E
43-015-30415-00-00	USA 21-429	Gas Well	APD	21	16	S	9	E
43-007-30515-00-00	USA 31-309	Gas Well	APD	31	15	S	10	E
43-007-30835-00-00	USA 33-515	Gas Well	APD	33	13	S	9	E
43-007-30836-00-00	USA 33-624	Gas Well	APD	33	13	S	9	E
43-007-30803-00-00	USA 34-518	Gas Well	APD	34	14	S	8	E
43-007-30478-00-00	UTAH 05-224	Gas Well	APD	5	15	S	9	E
43-015-30411-00-00	UTAH 16-365	Gas Well	APD	16	16	S	9	E
43-015-30412-00-00	UTAH 16-366	Gas Well	APD	16	16	S	9	E
43-015-30413-00-00	UTAH 16-430	Gas Well	APD	16	16	S	9	E
43-015-30299-00-00	UTAH 18-374	Gas Well	APD	18	16	S	9	E
43-015-30420-00-00	UTAH 19-377	Gas Well	APD	19	16	S	9	E
43-015-30492-00-00	UTAH 19-378	Gas Well	APD	19	16	S	9	E
43-007-30891-00-00	UTAH 19-533	Gas Well	APD	19	14	S	10	E
43-015-30414-00-00	UTAH 20-381	Gas Well	APD	20	16	S	9	E
43-015-30421-00-00	UTAH 20-382	Gas Well	APD	20	16	S	9	E
43-015-30518-00-00	UTAH 25-576	Gas Well	APD	25	16	S	8	E
43-015-30539-00-00	UTAH 25-578	Gas Well	APD	25	16	S	8	E
43-015-30540-00-00	UTAH 25-579	Gas Well	APD	25	16	S	8	E
43-007-30817-00-00	UTAH 25-618	Gas Well	APD	25	13	S	9	E
43-015-30543-00-00	UTAH 26-582	Gas Well	APD	26	16	S	8	E
43-015-30547-00-00	UTAH 29-608	Gas Well	APD	29	16	S	9	E
43-007-30889-00-00	UTAH 32-128	Gas Well	APD	32	14	S	10	E
43-007-30814-00-00	UTAH 35-506	Gas Well	APD	35	13	S	9	E

## Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twpn	Twpd	Rngn	Rngd
43-047-33750-00-00	FEDERAL 34-29	Gas Well	P	29	9	S	19	E
43-007-30782-00-00	GAROFOLA 26-482	Gas Well	P	26	15	S	8	E
43-007-30335-00-00	GIACOLETTO 11-113	Gas Well	P	11	14	S	9	E
43-007-30407-00-00	GIACOLETTO 13-120	Gas Well	P	13	14	S	9	E
43-007-30345-00-00	GIACOLETTO 14-121	Gas Well	P	14	14	S	9	E
43-007-30487-00-00	HELPER & ASSOC 07-307	Gas Well	P	7	15	S	9	E
43-007-30459-00-00	HELPER & ASSOC 18-236	Gas Well	P	18	15	S	9	E
43-007-30720-00-00	HELPER & ASSOC 18-308	Gas Well	P	18	15	S	9	E
43-007-30412-00-00	HELPER & ASSOC 8-232	Gas Well	P	8	15	S	9	E
43-007-30258-00-00	HELPER & ASSOCIATES 7-84	Gas Well	P	7	15	S	9	E
43-007-30588-00-00	JENSEN 16-132	Gas Well	P	16	15	S	10	E
43-007-30420-00-00	KAKATSIDES 31-197	Gas Well	P	31	14	S	9	E
43-007-30296-00-00	LDS 17-133	Gas Well	P	17	15	S	10	E
43-007-30323-00-00	PAAR 16-146	Gas Well	P	16	14	S	9	E
43-047-34286-00-00	PETES WASH 23-12 #1	Gas Well	P	12	10	S	17	E
43-007-30748-00-00	PIERUCCI 25-461	Gas Well	P	25	15	S	8	E
43-007-30749-00-00	PIERUCCI 25-462	Gas Well	P	25	15	S	8	E
43-007-30754-00-00	PIERUCCI 26-463	Gas Well	P	26	15	S	8	E
43-007-30755-00-00	PIERUCCI 26-464	Gas Well	P	26	15	S	8	E
43-007-30745-00-00	PIERUCCI 26-481	Gas Well	P	26	15	S	8	E
43-007-30117-00-00	PINNACLE PEAK 19-171	Gas Well	P	19	14	S	9	E
43-007-30845-00-00	PMC 10-526	Gas Well	P	10	15	S	8	E
43-007-30282-00-00	POWELL 19-104	Gas Well	P	19	15	S	10	E
43-007-30283-00-00	POWELL 19-105	Gas Well	P	19	15	S	10	E
43-007-30346-00-00	POWELL 30-173	Gas Well	P	30	15	S	10	E
43-015-30279-00-00	PPCO 10-557	Gas Well	P	10	16	S	8	E
43-015-30494-00-00	PPCO 15-555	Gas Well	P	15	16	S	8	E
43-007-30211-00-00	PRETTYMAN 10-15-34	Gas Well	P	10	14	S	9	E
43-007-30340-00-00	PRETTYMAN 11-114	Gas Well	P	11	14	S	9	E
43-007-30653-00-00	RGC 21-331	Gas Well	P	21	15	S	9	E
43-007-30743-00-00	RGC 21-332	Gas Well	P	21	15	S	9	E
43-007-30747-00-00	RGC 25-460	Gas Well	P	25	15	S	8	E
43-007-30559-00-00	RGC 28-318	Gas Well	P	28	15	S	9	E
43-007-30518-00-00	RGC 28-319	Gas Well	P	28	15	S	9	E
43-007-30509-00-00	RITZAKIS 03-408	Gas Well	P	3	14	S	9	E
43-007-30473-00-00	RITZAKIS 5-304	Gas Well	P	5	14	S	9	E
43-007-30474-00-00	RITZAKIS 5-305	Gas Well	P	5	14	S	9	E
43-007-30475-00-00	RITZAKIS 8-298	Gas Well	P	8	14	S	9	E
43-007-30479-00-00	RITZAKIS 8-299	Gas Well	P	8	14	S	9	E
43-007-30476-00-00	RITZAKIS 8-300	Gas Well	P	8	14	S	9	E
43-007-30374-00-00	ROBERTSON 32-127	Gas Well	P	32	14	S	10	E
43-007-30610-00-00	SAMPINOS 16-131	Gas Well	P	16	15	S	10	E
43-007-30723-00-00	SAMPINOS 16-454	Gas Well	P	16	15	S	10	E
43-007-30765-00-00	SAMPINOS 16-521	Gas Well	P	16	15	S	10	E
43-007-30800-00-00	SEELY 22-501	Gas Well	P	22	14	S	8	E
43-007-30130-00-00	ST OF UT 25-9-1	Gas Well	P	25	14	S	9	E
43-007-30142-00-00	ST OF UT 36-3-4	Gas Well	P	36	14	S	9	E
43-007-30116-00-00	STELLA-HAMAKER 10-174	Gas Well	P	10	15	S	8	E
43-007-30746-00-00	TABOR 23-468	Gas Well	P	23	15	S	8	E
43-007-30319-00-00	TELONIS 15-142	Gas Well	P	15	14	S	9	E
43-007-30322-00-00	TELONIS 16-145	Gas Well	P	16	14	S	9	E
43-007-30300-00-00	TELONIS 19-150	Gas Well	P	19	14	S	9	E
43-007-30299-00-00	TELONIS 19-151	Gas Well	P	19	14	S	9	E
43-007-30327-00-00	TELONIS 20-152	Gas Well	P	20	14	S	9	E

Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twpn	Twpd	Rngn	Rngd
43-007-30631-00-00	USA 13-419	Gas Well	P	13	15	S	8	E
43-007-30707-00-00	USA 13-447	Gas Well	P	13	14	S	8	E
43-007-30706-00-00	USA 13-470	Gas Well	P	13	14	S	8	E
43-007-30789-00-00	USA 13-474	Gas Well	P	13	14	S	8	E
43-007-30790-00-00	USA 13-475	Gas Well	P	13	14	S	8	E
43-007-30568-00-00	USA 13-91	Gas Well	P	13	14	S	9	E
43-007-30404-00-00	USA 14-122	Gas Well	P	14	14	S	9	E
43-015-30418-00-00	USA 1-425	Gas Well	P	1	16	S	9	E
43-007-30579-00-00	USA 14-325	Gas Well	P	14	15	S	8	E
43-007-30634-00-00	USA 14-386	Gas Well	P	14	15	S	8	E
43-007-30646-00-00	USA 14-416	Gas Well	P	14	15	S	8	E
43-007-30647-00-00	USA 14-417	Gas Well	P	14	15	S	8	E
43-007-30791-00-00	USA 14-476	Gas Well	P	14	14	S	8	E
43-007-30792-00-00	USA 14-477	Gas Well	P	14	14	S	8	E
43-007-30529-00-00	USA 14-74	Gas Well	P	14	14	S	9	E
43-007-30263-00-00	USA 14-75	Gas Well	P	14	14	S	9	E
43-007-30450-00-00	USA 15-176	Gas Well	P	15	14	S	9	E
43-007-30423-00-00	USA 15-177	Gas Well	P	15	14	S	9	E
43-007-30690-00-00	USA 15-420	Gas Well	P	15	15	S	8	E
43-007-30691-00-00	USA 15-422	Gas Well	P	15	15	S	8	E
43-007-30264-00-00	USA 15-88	Gas Well	P	15	14	S	9	E
43-007-30422-00-00	USA 17-179	Gas Well	P	17	14	S	9	E
43-007-30622-00-00	USA 17-180A	Gas Well	P	17	14	S	9	E
43-007-30618-00-00	USA 18-181	Gas Well	P	18	14	S	9	E
43-007-30417-00-00	USA 18-182	Gas Well	P	18	14	S	9	E
43-007-30619-00-00	USA 18-435	Gas Well	P	18	14	S	9	E
43-007-30393-00-00	USA 19-222	Gas Well	P	19	15	S	10	E
43-007-30392-00-00	USA 19-73	Gas Well	P	19	15	S	10	E
43-007-30448-00-00	USA 20-287	Gas Well	P	20	15	S	10	E
43-007-30451-00-00	USA 20-288	Gas Well	P	20	15	S	10	E
43-007-30590-00-00	USA 20-398	Gas Well	P	20	15	S	10	E
43-007-30591-00-00	USA 20-399	Gas Well	P	20	15	S	10	E
43-007-30424-00-00	USA 21-184	Gas Well	P	21	14	S	9	E
43-007-30425-00-00	USA 21-35	Gas Well	P	21	14	S	9	E
43-007-30426-00-00	USA 22-185	Gas Well	P	22	14	S	9	E
43-007-30477-00-00	USA 22-186	Gas Well	P	22	14	S	9	E
43-007-30700-00-00	USA 22-466	Gas Well	P	22	15	S	8	E
43-007-30611-00-00	USA 23-423	Gas Well	P	23	14	S	8	E
43-007-30650-00-00	USA 23-445	Gas Well	P	23	15	S	8	E
43-007-30704-00-00	USA 23-451	Gas Well	P	23	15	S	8	E
43-007-30503-00-00	USA 23-467	Gas Well	P	23	15	S	8	E
43-007-30793-00-00	USA 23-478	Gas Well	P	23	14	S	8	E
43-007-30794-00-00	USA 23-479	Gas Well	P	23	14	S	8	E
43-007-30795-00-00	USA 23-480	Gas Well	P	23	14	S	8	E
43-007-30469-00-00	USA 24-183	Gas Well	P	24	14	S	8	E
43-007-30612-00-00	USA 24-387	Gas Well	P	24	14	S	8	E
43-007-30613-00-00	USA 24-388	Gas Well	P	24	14	S	8	E
43-007-30651-00-00	USA 24-443	Gas Well	P	24	15	S	8	E
43-007-30648-00-00	USA 24-444	Gas Well	P	24	15	S	8	E
43-007-30708-00-00	USA 24-446	Gas Well	P	24	14	S	8	E
43-007-30652-00-00	USA 24-448	Gas Well	P	24	15	S	8	E
43-007-30705-00-00	USA 24-449	Gas Well	P	24	15	S	8	E
43-007-30505-00-00	USA 25-459	Gas Well	P	25	15	S	8	E
43-007-30614-00-00	USA 26-393	Gas Well	P	26	14	S	8	E

## Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twpn	Twpd	Rngn	Rngd
43-007-30430-00-00	UTAH 06-223	Gas Well	P	6	15	S	9	E
43-007-30562-00-00	UTAH 06-330	Gas Well	P	6	15	S	9	E
43-007-30716-00-00	UTAH 06-483	Gas Well	P	6	15	S	9	E
43-007-30409-00-00	UTAH 07-234	Gas Well	P	7	15	S	9	E
43-007-30421-00-00	UTAH 07-235	Gas Well	P	7	15	S	9	E
43-007-30411-00-00	UTAH 08-231	Gas Well	P	8	15	S	9	E
43-007-30488-00-00	UTAH 08-233	Gas Well	P	8	15	S	9	E
43-015-30464-00-00	UTAH 08-354	Gas Well	P	8	16	S	9	E
43-015-30378-00-00	UTAH 08-355	Gas Well	P	8	16	S	9	E
43-015-30379-00-00	UTAH 08-356	Gas Well	P	8	16	S	9	E
43-015-30380-00-00	UTAH 08-357	Gas Well	P	8	16	S	9	E
43-007-30449-00-00	UTAH 09-227	Gas Well	P	9	15	S	9	E
43-007-30561-00-00	UTAH 09-329	Gas Well	P	9	15	S	9	E
43-015-30300-00-00	UTAH 09-358	Gas Well	P	9	16	S	9	E
43-015-30407-00-00	UTAH 09-359	Gas Well	P	9	16	S	9	E
43-015-30397-00-00	UTAH 09-360	Gas Well	P	9	16	S	9	E
43-015-30408-00-00	UTAH 09-361	Gas Well	P	9	16	S	9	E
43-007-30580-00-00	UTAH 09-412	Gas Well	P	9	15	S	10	E
43-007-30605-00-00	UTAH 09-413	Gas Well	P	9	15	S	10	E
43-007-30657-00-00	UTAH 09-450	Gas Well	P	9	15	S	10	E
43-007-30722-00-00	UTAH 09-453	Gas Well	P	9	15	S	10	E
43-007-30302-00-00	UTAH 10-01-36	Gas Well	P	10	15	S	9	E
43-007-30298-00-00	UTAH 10-219	Gas Well	P	10	15	S	9	E
43-007-30432-00-00	UTAH 10-220	Gas Well	P	10	15	S	9	E
43-007-30303-00-00	UTAH 10-221	Gas Well	P	10	15	S	9	E
43-007-30228-00-00	UTAH 11-50	Gas Well	P	11	15	S	9	E
43-007-30229-00-00	UTAH 11-51	Gas Well	P	11	15	S	9	E
43-007-30230-00-00	UTAH 11-52	Gas Well	P	11	15	S	9	E
43-007-30231-00-00	UTAH 11-53	Gas Well	P	11	15	S	9	E
43-007-30467-00-00	UTAH 1-209	Gas Well	P	1	15	S	8	E
43-007-30210-00-00	UTAH 12-15-37	Gas Well	P	12	15	S	9	E
43-007-30232-00-00	UTAH 12-54	Gas Well	P	12	15	S	9	E
43-007-30233-00-00	UTAH 12-55	Gas Well	P	12	15	S	9	E
43-007-30234-00-00	UTAH 12-56	Gas Well	P	12	15	S	9	E
43-015-30493-00-00	UTAH 13-376	Gas Well	P	13	16	S	8	E
43-015-30301-00-00	UTAH 13-550	Gas Well	P	13	16	S	8	E
43-007-30243-00-00	UTAH 13-65	Gas Well	P	13	15	S	9	E
43-007-30244-00-00	UTAH 13-66	Gas Well	P	13	15	S	9	E
43-007-30245-00-00	UTAH 13-67	Gas Well	P	13	15	S	9	E
43-007-30246-00-00	UTAH 13-68	Gas Well	P	13	15	S	9	E
43-007-30439-00-00	UTAH 13-92	Gas Well	P	13	14	S	9	E
43-007-30220-00-00	UTAH 1-42	Gas Well	P	1	15	S	9	E
43-007-30221-00-00	UTAH 1-43	Gas Well	P	1	15	S	9	E
43-007-30222-00-00	UTAH 1-44	Gas Well	P	1	15	S	9	E
43-007-30223-00-00	UTAH 1-45	Gas Well	P	1	15	S	9	E
43-015-30330-00-00	UTAH 14-551	Gas Well	P	14	16	S	8	E
43-015-30331-00-00	UTAH 14-552	Gas Well	P	14	16	S	8	E
43-007-30239-00-00	UTAH 14-61	Gas Well	P	14	15	S	9	E
43-007-30240-00-00	UTAH 14-62	Gas Well	P	14	15	S	9	E
43-007-30241-00-00	UTAH 14-63	Gas Well	P	14	15	S	9	E
43-007-30242-00-00	UTAH 14-64	Gas Well	P	14	15	S	9	E
43-015-30334-00-00	UTAH 15-553	Gas Well	P	15	16	S	8	E
43-007-30416-00-00	UTAH 17-101	Gas Well	P	17	15	S	10	E
43-007-30277-00-00	UTAH 17-102	Gas Well	P	17	15	S	10	E

## Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twpn	Twpd	Rngn	Rngd
43-007-30255-00-00	UTAH 24-80	Gas Well	P	24	15	S	9	E
43-007-30256-00-00	UTAH 24-81	Gas Well	P	24	15	S	9	E
43-007-30267-00-00	UTAH 24-86	Gas Well	P	24	15	S	9	E
43-007-30375-00-00	UTAH 24-87	Gas Well	P	24	15	S	9	E
43-007-30227-00-00	UTAH 2-49	Gas Well	P	2	15	S	9	E
43-007-30157-00-00	UTAH 25-11-7	Gas Well	P	25	14	S	9	E
43-007-30399-00-00	UTAH 25-134	Gas Well	P	25	15	S	9	E
43-007-30400-00-00	UTAH 25-252	Gas Well	P	25	15	S	9	E
43-007-30401-00-00	UTAH 25-253	Gas Well	P	25	15	S	9	E
43-007-30402-00-00	UTAH 25-254	Gas Well	P	25	15	S	9	E
43-007-30600-00-00	UTAH 25-389	Gas Well	P	25	14	S	8	E
43-007-30599-00-00	UTAH 25-390	Gas Well	P	25	14	S	8	E
43-007-30658-00-00	UTAH 25-391	Gas Well	P	25	14	S	8	E
43-007-30602-00-00	UTAH 25-392	Gas Well	P	25	14	S	8	E
43-007-30206-00-00	UTAH 25-4-33	Gas Well	P	25	14	S	9	E
43-015-30519-00-00	UTAH 25-577	Gas Well	P	25	16	S	8	E
43-007-30156-00-00	UTAH 25-7-6	Gas Well	P	25	14	S	9	E
43-007-30204-00-00	UTAH 26-11-25	Gas Well	P	26	14	S	9	E
43-007-30205-00-00	UTAH 26-1-23	Gas Well	P	26	14	S	9	E
43-007-30181-00-00	UTAH 26-16-8	Gas Well	P	26	14	S	9	E
43-007-30446-00-00	UTAH 26-255	Gas Well	P	26	15	S	9	E
43-007-30445-00-00	UTAH 26-256	Gas Well	P	26	15	S	9	E
43-007-30444-00-00	UTAH 26-257	Gas Well	P	26	15	S	9	E
43-007-30514-00-00	UTAH 26-267	Gas Well	P	26	15	S	9	E
43-015-30541-00-00	UTAH 26-580	Gas Well	P	26	16	S	8	E
43-015-30542-00-00	UTAH 26-581	Gas Well	P	26	16	S	8	E
43-015-30544-00-00	UTAH 26-583	Gas Well	P	26	16	S	8	E
43-007-30202-00-00	UTAH 26-6-24	Gas Well	P	26	14	S	9	E
43-007-30395-00-00	UTAH 27-187	Gas Well	P	27	14	S	9	E
43-007-30292-00-00	UTAH 27-188	Gas Well	P	27	14	S	9	E
43-007-30457-00-00	UTAH 27-268	Gas Well	P	27	15	S	9	E
43-007-30458-00-00	UTAH 27-269	Gas Well	P	27	15	S	9	E
43-007-30712-00-00	UTAH 27-457	Gas Well	P	27	14	S	8	E
43-007-30714-00-00	UTAH 27-458	Gas Well	P	27	14	S	8	E
43-007-30777-00-00	UTAH 27-520	Gas Well	P	27	14	S	8	E
43-015-30545-00-00	UTAH 27-584	Gas Well	P	27	16	S	8	E
43-007-30193-00-00	UTAH 27-8-29	Gas Well	P	27	14	S	9	E
43-007-30186-00-00	UTAH 27-9-30	Gas Well	P	27	14	S	9	E
43-007-30396-00-00	UTAH 28-189	Gas Well	P	28	14	S	9	E
43-007-30397-00-00	UTAH 28-190	Gas Well	P	28	14	S	9	E
43-007-30293-00-00	UTAH 28-191	Gas Well	P	28	14	S	9	E
43-007-30294-00-00	UTAH 28-192	Gas Well	P	28	14	S	9	E
43-007-30551-00-00	UTAH 28-320	Gas Well	P	28	15	S	9	E
43-007-30560-00-00	UTAH 28-321	Gas Well	P	28	15	S	9	E
43-007-30405-00-00	UTAH 29-193	Gas Well	P	29	14	S	9	E
43-007-30427-00-00	UTAH 29-194	Gas Well	P	29	14	S	9	E
43-007-30739-00-00	UTAH 29-339	Gas Well	P	29	15	S	9	E
43-007-30740-00-00	UTAH 29-340	Gas Well	P	29	15	S	9	E
43-007-30741-00-00	UTAH 29-341	Gas Well	P	29	15	S	9	E
43-007-30742-00-00	UTAH 29-342	Gas Well	P	29	15	S	9	E
43-007-30262-00-00	UTAH 30-125	Gas Well	P	30	14	S	10	E
43-007-30185-00-00	UTAH 30-13-14	Gas Well	P	30	14	S	10	E
43-007-30265-00-00	UTAH 30-195	Gas Well	P	30	14	S	9	E
43-007-30344-00-00	UTAH 30-196	Gas Well	P	30	14	S	9	E

## Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twpr	Twpd	Rngn	Rngd
43-007-30178-00-00	UTAH 36-1-2	Gas Well	P	36	14	S	9	E
43-007-30341-00-00	UTAH 36-135	Gas Well	P	36	15	S	9	E
43-007-30343-00-00	UTAH 36-136	Gas Well	P	36	15	S	9	E
43-007-30342-00-00	UTAH 36-137	Gas Well	P	36	15	S	9	E
43-007-30315-00-00	UTAH 36-162	Gas Well	P	36	14	S	8	E
43-007-30316-00-00	UTAH 36-163	Gas Well	P	36	14	S	8	E
43-007-30317-00-00	UTAH 36-164	Gas Well	P	36	14	S	8	E
43-007-30318-00-00	UTAH 36-165	Gas Well	P	36	14	S	8	E
43-007-30144-00-00	UTAH 36-9-5	Gas Well	P	36	14	S	9	E
43-015-30341-00-00	UTAH 4-280	Gas Well	P	4	16	S	9	E
43-015-30342-00-00	UTAH 4-282	Gas Well	P	4	16	S	9	E
43-007-30384-00-00	UTAH 5-205	Gas Well	P	5	15	S	9	E
43-007-30269-00-00	UTAH 5-94	Gas Well	P	5	15	S	10	E
43-007-30270-00-00	UTAH 5-95	Gas Well	P	5	15	S	10	E
43-007-30271-00-00	UTAH 5-96	Gas Well	P	5	15	S	10	E
43-007-30217-00-00	UTAH 6-38	Gas Well	P	6	15	S	10	E
43-007-30218-00-00	UTAH 6-39	Gas Well	P	6	15	S	10	E
43-007-30219-00-00	UTAH 6-40	Gas Well	P	6	15	S	10	E
43-007-30254-00-00	UTAH 6-41	Gas Well	P	6	15	S	10	E
43-007-30235-00-00	UTAH 7-57	Gas Well	P	7	15	S	10	E
43-007-30236-00-00	UTAH 7-58	Gas Well	P	7	15	S	10	E
43-007-30237-00-00	UTAH 7-59	Gas Well	P	7	15	S	10	E
43-007-30238-00-00	UTAH 7-60	Gas Well	P	7	15	S	10	E
43-007-30275-00-00	UTAH 8-100	Gas Well	P	8	15	S	10	E
43-007-30410-00-00	UTAH 8-230	Gas Well	P	8	15	S	9	E
43-007-30272-00-00	UTAH 8-97	Gas Well	P	8	15	S	10	E
43-007-30285-00-00	UTAH 8-98X	Gas Well	P	8	15	S	10	E
43-007-30274-00-00	UTAH 8-99	Gas Well	P	8	15	S	10	E
43-007-30413-00-00	UTAH 9-228	Gas Well	P	9	15	S	9	E
43-007-30414-00-00	UTAH 9-229	Gas Well	P	9	15	S	9	E
43-007-30279-00-00	WILLIAMS 30-78	Gas Well	P	30	14	S	10	E
43-007-30481-00-00	WOOLSTENHULME 05-266	Gas Well	P	5	15	S	10	E
43-015-30250-00-00	UTAH 16-110	Gas Well	Shut In	16	16	S	9	E



# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Eastern States Office  
7450 Boston Boulevard  
Springfield, Virginia 22153

IN REPLY REFER TO  
3106.8(932.34)WF

January 16, 2003

### NOTICE

ConocoPhillips Company	:	Oil & Gas Leases
P.O. Box 7500	:	
Bartlesville, Oklahoma 74005	:	

### Merger/Name Change Recognized

Acceptable evidence was received in this office on January 14, 2003, concerning the change of name of Phillips Petroleum Company to **ConocoPhillips Company** and the merger of **Conoco Incorporated** into **ConocoPhillips Company** on Federal oil and gas leases, with **ConocoPhillips Company** being the surviving entity.

The Secretary of the State of Delaware certified the effective date of this merger effective December 31, 2002.

The oil and gas lease files identified on the enclosed exhibit have been noted to the merger. The exhibit was compiled from a list of leases obtained from your list of leases. Eastern States has not abstracted the lease files to determine if the entities affected by this merger hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested record title or operating rights interest. We are notifying the Minerals Management Service and all applicable Bureau of Land Management offices of this merger and name change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify other leases in which the merging entity maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

By Operation of law the name of the principal on Nationwide Oil and Gas Bond held by Conoco Incorporated (ES0085) has been changed to ConocoPhillips Company.

If you have any questions, please contact Bill Forbes at 703-440-1536.

*S/ Wilbert B. Forbes*

Wilbert B. Forbes  
Land Law Examiner  
Branch of Use Authorization  
Division of Resources Planning, Use  
and Protection

bc: JFO, BLM State Offices, MMS, ES RF, 930 RF, ES-932:  
Bforbes:wbf:01/16/03:440-1536/ConocoPhillips Co

**OPERATOR CHANGE WORKSHEET**

**ROUTING**

1. GLH
2. CDW ✓
3. FILE

Change of Operator (Well Sold)

Designation of Agent/Operator

Operator Name Change

**X Merger**

The operator of the well(s) listed below has changed, effective: **12-31-02**

<b>FROM: (Old Operator):</b>	<b>TO: (New Operator):</b>
PHILLIPS PETROLEUM COMPANY	CONOCOPHILLIPS COMPANY
Address: 980 PLAZA OFFICE	Address: P O BOX 2197, WL3 4066
BARTLESVILLE, OK 74004	HOUSTON, TX 77252
Phone: 1-(918)-661-4415	Phone: 1-(832)-486-2329
Account No. N1475	Account No. N2335

**CA No.**                      **Unit: DRUNKARDS WASH**

**WELL(S)**

NAME	SEC TWN RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
USA 26-424	26-14S-08E	43-007-30620	11256	FEDERAL	GW	P
UTAH 27-457	27-14S-08E	43-007-30712	11256	STATE	GW	P
UTAH 27-458	27-14S-08E	43-007-30714	11256	STATE	GW	P
UTAH 27-520	27-14S-08E	43-007-30777	11256	STATE	GW	P
UTAH 34-493	34-14S-08E	43-007-30778	11256	STATE	GW	P
USA 34-434	34-14S-08E	43-007-30621	11256	FEDERAL	GW	P
UTAH 34-456	34-14S-08E	43-007-30713	11256	STATE	GW	P
USA 35-248	35-14S-08E	43-007-30582	11256	FEDERAL	GW	P
USA 35-328	35-14S-08E	43-007-30583	11256	FEDERAL	GW	P
USA 35-396	35-14S-08E	43-007-30584	11256	FEDERAL	GW	P
USA 35-397	35-14S-08E	43-007-30585	11256	FEDERAL	GW	P
UTAH 36-162	36-14S-08E	43-007-30315	11256	STATE	GW	P
UTAH 36-163	36-14S-08E	43-007-30316	11256	STATE	GW	P
UTAH 36-164	36-14S-08E	43-007-30317	11256	STATE	GW	P
UTAH 36-165	36-14S-08E	43-007-30318	11256	STATE	GW	P
UTAH 02-406	02-14S-09E	43-007-30606	11256	STATE	GW	P
UTAH 02-405	02-14S-09E	43-007-30607	11256	STATE	GW	P
UTAH 02-404	02-14S-09E	43-007-30608	11256	STATE	GW	P
UTAH 02-403	02-14S-09E	43-007-30609	11256	STATE	GW	P
RITZAKIS 03-408	03-14S-09E	43-007-30509	11256	FEE	GW	P

**OPERATOR CHANGES DOCUMENTATION**

Enter date after each listed item is completed

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 01/08/2003
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 01/08/2003
3. The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 02/03/2003
4. Is the new operator registered in the State of Utah: YES Business Number: 562960-0143
5. If **NO**, the operator was contacted on: \_\_\_\_\_

6. (R649-9-2)Waste Management Plan has been received on: IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: 01/14/2003

8. **Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: 01/14/2003

9. **Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: 01/14/2003

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

**DATA ENTRY:**

1. Changes entered in the **Oil and Gas Database** on: 02/06/2003

2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 02/06/2003

3. Bond information entered in RBDMS on: N/A

4. Fee wells attached to bond in RBDMS on: N/A

**STATE WELL(S) BOND VERIFICATION:**

1. State well(s) covered by Bond Number: 8140-60-24

**FEDERAL WELL(S) BOND VERIFICATION:**

1. Federal well(s) covered by Bond Number: 8015-16-69

**INDIAN WELL(S) BOND VERIFICATION:**

1. Indian well(s) covered by Bond Number: N/A

**FEE WELL(S) BOND VERIFICATION:**

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number 6196922

2. The **FORMER** operator has requested a release of liability from their bond on: N/A  
The Division sent response by letter on: N/A

**LEASE INTEREST OWNER NOTIFICATION:**

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: N/A

**COMMENTS:**

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_