

001

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING

APPLICATION FOR PERMIT TO DRILL OR DEEPEN		5. Lease Designation and Serial Number: ML-48629 ml-48269	
		6. If Indian, Allottee or Tribe Name: N/A	
1A. Type of Work: DRILL <input checked="" type="checkbox"/> DEEPEN <input type="checkbox"/>		7. Unit Agreement Name: Drunkards Wash UTU-67921X	
B. Type of Well: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER: <input type="checkbox"/> SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>		8. Farm or Lease Name: Utah	
2. Name of Operator: Phillips Petroleum Company		9. Well Number: 34-511	
3. Address and Telephone Number: 6825 S. 5300 W. P.O. Box 851 Price, Utah 84501 (435) 613-9777		10. Field or Pool, or Wildcat: Drunkards Wash Undesignated	
4. Location of Well (Footages) At Surface: 2238' FNL, 1789' FWL At Proposed Producing Zone: 4389049 N 508337 E		11. Qtr/Qtr, Section, Township, Range, Meridian: SE/4 NW/4 Section 34, T13S, R09E, SLB&M	
14. Distance in miles and direction from nearest town or post office: 6.4 Miles northwest of Price, Utah		12. County: Carbon	13. State: UTAH
15. Distance to nearest property or lease line (feet): 1789'	16. Number of acres in lease: 2080	17. Number of acres assigned to this well: 160 acres	
18. Distance to nearest well, drilling, completed, or applied for, on this lease (feet): 2000'	19. Proposed Depth: 3500'	20. Rotary or cable tools: Rotary	
21. Elevations (show whether DF, RT, GR, etc.): 6047' GR		22. Approximate date work will start: May 2002	

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
14"	12 3/4"	Conductor	40'	
11"	J-55 8 5/8"	24#/ft	350'	135sks G+2%CaCl+1/4#/sk flocel
7 7/8"	N-80 5 1/2"	17#/ft	3490'	317sks 50/50poz8%gel+2%CaCl+10%extender
				83 sks "G" thixtropic

DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

ORIGINAL
RECEIVED
SEP 17 2001
DIVISION OF
OIL, GAS AND MINING
CONFIDENTIAL

24. Name & Signature: Jean Semborski *Jean Semborski* Title: Permitting Analyst Date: 8/30/01

(This space for state use only)
API Number Assigned: 43-007-30816

Approval: **Approved by the Utah Division of Oil, Gas and Mining**
Date: 02-19-02
By: *[Signature]*

Range 9 East

S89°27'10"W - 2619.53'

(S89°28'W - 2620.86')

(N89°52'W - 2640.0')

DRILL HOLE #34-511
ELEVATION 6046.8'

UTM
N - 4389052
E - 508356

2238.15'

1788.62'

34

SW CORNER
ELEV. 6062'

(N89°53'W - 5307.72')

Township 13 South
[N01°23'58"E - 2634.94'] [N01°23'20"E - 2634.67']
[N01°23'E - 5272.08'] [N00°49'E - 5297.82']

Legend

- Drill Hole Location
- ⊙ Brass Cap (Found)
- Brass Cap (Searched for, but not found)
- △ Calculated Corner
- () GLO
- GPS Measured

NOTES:

1. UTM AND LATITUDE / LONGITUDE COORDINATES ARE DERIVED USING A GPS PATHFINDER AND ARE SHOWN IN NAD 27 DATUM.

LAT / LONG	
39°39'11"N	110°54'09"W

Location:

THE WELL LOCATION WAS DETERMINED USING A TRIMBLE 4700 GPS SURVEY GRADE UNIT.

Basis of Bearing:

THE BASIS OF BEARING IS GPS MEASURED.

GLO Bearing:

THE BEARINGS INDICATED ARE PER THE RECORDED PLAT OBTAINED FROM THE U.S. LAND OFFICE.

Basis of Elevation:


BASIS OF ELEVATION OF 6062' BEING AT THE SOUTHWEST SECTION CORNER OF SECTION 34, TOWNSHIP 13 SOUTH, RANGE 9 EAST, SALT LAKE BASE AND MERIDIAN, AS SHOWN ON THE STANDARDVILLE QUADRANGLE 7.5 MINUTE SERIES MAP.

Description of Location:

PROPOSED DRILL HOLE LOCATED IN THE SE1/4, NW1/4 OF SECTION 34, T13S, R9E, S.L.B.&M., BEING 2238.15' SOUTH AND 1788.62' EAST FROM THE NORTHWEST SECTION CORNER OF SECTION 34, T13S, R9E, SALT LAKE BASE & MERIDIAN.

Surveyor's Certificate:

I, Albert J. Spensko, a Registered Professional Land Surveyor, holding Certificate 146652 State of Utah, do hereby certify that the information on this drawing is a true and accurate survey based on data of record and was conducted under my personal direction and supervision as shown hereon.



Talon Resources, Inc.
375 South Carbon Avenue, Suite 101
Price, Utah 84501
Ph: 435-637-6781
Fax: 435-636-8603



PHILLIPS PETROLEUM
WELL #34-511

Section 34, T13S, R9E, S.L.B.&M.
Carbon County, Utah

Drawn By
M. MOON

Checked By
L.W.J./A.J.S.

Drawing No.

A-1

Date:
08/03/01

Scale:
1" = 1000'

Sheet 1 of 4

Job No.
410

GRAPHIC SCALE



(IN FEET)

1 inch = 1000 ft.

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

September 21, 2001

Memorandum

To: Assistant District Manager Minerals, Moab District
From: Michael Coulthard, Petroleum Engineer
Subject: 2001 Plan of Development Drunkards Wash Unit,
Carbon County, Utah.

Pursuant to email between Lisha Cordova, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management. The following well is planned for calendar year 2001 within the Drunkards Wash, Carbon County, Utah.

Api Number	Well	Location
(Proposed PZ Ferron)		
43-007-30813	Ritzakis 33-514	Sec. 33, T13S, R9E 1538 FNL 1676 FEL
43-007-30814	Utah 35-506	Sec. 35, T13S, R9E 1777 FNL 1655 FEL
43-007-30815	Utah 35-507	Sec. 35, T13S, R9E 1336 FNL 1448 FWL
43-007-30816	Utah 34-511	Sec. 34, T13S, R9E 2238 FNL 1789 FWL

This office has no objection to permitting the well at this time.

/s/ Michael L. Coulthard

bcc: File - Drunkards Wash Unit
Division of Oil Gas and Mining
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:9-21-1



PHILLIPS PETROLEUM COMPANY

6825 South 5300 West
P.O. Box 851
Price, UT 84501
TEL: (435) 613-9777 FAX: (435) 613-9782

August 30, 2001

Ms Lisha Cordova
State of Utah
Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
SLC, Utah 84114-5801

RE: Application for Permit to Drill-
Utah 34-511, SE/4 NW/4 Sec.34
T13S, R09E, SLB & M, Carbon County, Utah

Dear Ms. Cordova:

Enclosed is the original of the *Application for Permit to Drill* (APD). Included with the APD is the following information:

- Exhibit "A"- Survey Plat of the Proposed Well Site;
- Exhibit "B" - Proposed Location Map with Pipeline, Power, and Road Access;
- Exhibit "C" - Drilling Site Layout;
- Exhibit "D" - Drilling Information
- Exhibit "E" - Multipoint Surface Use Plan
- Exhibit "F" - Typical Road Cross-section;
- Exhibit "G" - BOP Diagram;
- Exhibit "H" - Typical Wellhead Manifold;
- Exhibit "I" - Evidence of Bond;

ORIGINAL

CONFIDENTIAL

RECEIVED

SEP 17 2001

DIVISION OF
OIL, GAS AND MINING

This proposed well is located more than 460' from the boundary of the Unit Area and from the boundary of any uncommitted tract within the Unit Area and will not require the administrative approval in accordance with Utah Administrative Code Rule R649-3-3.

Please accept this letter as Phillips Petroleum Company's written request for confidential treatment of all information contained in and pertaining to this permit application, if said information is eligible for such consideration.

Thank you very much for your timely consideration of this application. Please feel free to contact me if you have any questions.

Sincerely,



Jean Semborski
Permitting Analyst

cc: Mr. Eric Jones, BLM, Moab, Utah
Mr. Chuck Snure, Texaco
Mr. Robin Adams, Dominion Resources
Mr. Don Stephens, BLM, Price, Utah
Ms. Jeanette Borges, Phillips Petroleum Company
Mr. Dave Levanger, Carbon County Planning and Zoning
PPCo Well File

EXHIBIT "D"
DRILLING PROGRAM

Attached to Form 3
River Gas Corp.
Utah 34-511
SE/4, NW/4, Sec. 34, T13S, R09E, SLB & M
2238' FNL, 1789' FWL
Carbon County, Utah

1. The Surface Geologic Formation

Mancos Shale

2. Estimated Tops of Important Geologic Markers

Blue Gate/Ferron 2997'

3. Projected Gas & H2O zones (Ferron Formation)

Coals and sandstones 3027' - 3207'

No groundwater is expected to be encountered.

Casing & cementing will be done to protect potentially productive hydrocarbons, lost circulation zones, abnormal pressure zones, and prospectively valuable mineral deposits. All indications of usable water will be reported.

Surface casing will be tested to 1400 psi.

4. The Proposed Casing and Cementing Programs

<u>HOLE SIZE</u>	<u>SETTING DEPTH (INTERVAL)</u>	<u>SIZE (OD)</u>	<u>WEIGHT, GRADE & JOINT</u>	<u>NEW, USED</u>
14"	40'	12-3/4"	Conductor	New
11"	350'	8-5/8"	24#ST&C	New
7-7/8"	3490'	5-1/2"	17#LT&C	New

Cement Program -Every attempt will be made to bring cement back to surface.

Surface Casing: 135 sks G+2%CaCl+1/4#per sack flocel;15.8#/gal,density, 1.15 cu.ft/sk yield.

Production Casing: 317 sks 50/50 poz 8%gel +2%CaCl+10%extender;12.5#/gal, density, 1.92 cu.ft/sk yield.

83 sks "G" thixotropic, 14.2#/gal density, 1.61 cu.ft/sk yield

The following shall be entered in the driller's log:

- 1) Blowout preventer pressure tests, including test pressures and results;
- 2) Blowout preventer tests for proper functioning;
- 3) Blowout prevention drills conducted;
- 4) Casing run, including size, grade, weight, and depth set;
- 5) How the pipe was cemented, including amount of cement, type, whether cement circulated, location of the cementing tools, etc.;
- 6) Waiting on cement time for each casing string;
- 7) Casing pressure tests after cementing, including test pressures and results.

5. The Operator's Minimum Specifications for Pressure Control

Exhibit "G" is a schematic diagram of the blowout preventer equipment. A double gate 3000 psi BOPE will be used with a rotating head. This equipment will be tested to 2000 psi. All tests will be recorded in a Driller's Report Book. Physical operation of BOP's will be checked on each trip.

6. The Type and Characteristics of the Proposed Circulating Muds

0-300	11" hole	Drill with air, will mud-up if necessary.
300-TD	7 7/8" hole	Drill with air. 400 psi @ 1500-1800 Scf.

7. The Testing, Logging and Coring Programs are as followed

300-TD Gamma Ray, Density, Neutron Porosity, Induction, Caliper

Any Anticipated Abnormal Pressures or Temperatures

No abnormal pressures or temperatures have been noted or reported in wells drilled in the area nor at the depths anticipated in this well. Bottom hole pressure expected is 1516 psi max. No hydrogen sulfide or other hazardous gases or fluids have been found, reported or are known to exist at these depths in the area.

8. Anticipated Starting Date and Duration of the Operations.

The well will be drilled around May 2002.

Verbal and/or written notifications listed below shall be submitted in accordance with instructions from the Division of Oil, Gas & Mining:

- (a) prior to beginning construction;
- (b) prior to spudding;
- (c) prior to running any casing or BOP tests;
- (d) prior to plugging the well, for verbal plugging instructions.

Spills, blowouts, fires, leaks, accidents or other unusual occurrences shall be reported to the Division of Oil, Gas & Mining immediately.

EXHIBIT "E"
MULTIPOINT SURFACE USE PLAN

Attached to Form 3
River Gas Corp.
Utah 34-511
SE/4, NW/4, Sec. 34, T13S, R09E, SLB & M
2238' FNL, 1789' FWL
Carbon County, Utah

1. Existing Roads

- a. We do not plan to change, alter or improve upon any existing state or county roads.
- b. Existing roads will be maintained in the same or better condition. See Exhibit "B".

2. Planned Access

Approximately 2500' of new access is required (See Exhibit "B")

- a. Maximum Width: 24' travel surface with 27' base
- b. Maximum grade: 4%
- c. Turnouts: None
- d. Drainage design: 4 culverts may be required. Water will be diverted around well pad as necessary.
- e. If the well is productive, the road will be surfaced and maintained as necessary to prevent soil erosion and accommodate year-round traffic.
- f. Pipe and Power lines will follow the proposed access road.

3. Location of Existing Wells

- a. See Exhibit "B". There are 9 proposed and 3 existing wells within a one-mile radius of the proposed location.

4. Location of Existing and/or Proposed Facilities

- a. If the well is a producer, installation of production facilities will be as shown on Exhibit "H". Buried powerlines run along access on the east and north, gathering lines on the south or west.
- b. Rehabilitation of all pad areas not used for production facilities will be made in accordance with landowner stipulations.

5. Location and Type of Water Supply

- a. Water to be used for drilling will be purchased from the Price River Water Improvement District (a local source of municipal water) (tel. 435-637-6350).
- b. Water will be transported by truck over approved access roads.
- c. No water well is to be drilled for this location.

6. Source of Construction Materials

- a. Any necessary construction materials needed will be obtained locally and hauled to the location on existing roads.
- b. No construction or surfacing materials will be taken from Federal/Indian land.

7. Methods for handling waste disposal

- a. As the well will be air drilled, a small reserve pit will be constructed with a minimum of one-half the total depth below the original ground surface on the lowest point within the pit. The pit will not be lined unless conditions encountered during construction warrant it or if deemed necessary by the DOGM representative during the pre-site inspection. Three sides of the reserve pit will be fenced within 24 hours after completion of construction and the fourth side within 24 hours after drilling operation cease with woven wire topped with barbed wire to a height of not less than four feet. The fence will be kept in good repair while the pit is drying.
- b. Following drilling, the liquid waste will be evaporated from the pit and the pit back-filled and returned to natural grade. No liquid hydrocarbons will be discharged to the reserve pit or location.
- c. In the event fluids are produced, any oil will be retained in tankage until sold and any water produced will be retained until its quality can be determined. The quality and quantity of the water will determine the method of disposal.
- d. Trash will be contained in a portable metal container and will be hauled from location periodically and disposed of at an approved disposal site. Chemical toilets will be placed on location and sewage will be disposed of at an appropriate disposal site.

8. Ancillary Facilities

- a. We anticipate no need for ancillary facilities with the exception of one trailer to be located on the drill site.

9. Wellsite Layout

- a. Available topsoil will be removed from the location and stockpiled. Location of mud tanks, reserve and berm pits, and soil stockpiles will be located as shown on the attachments.
- b. A blooie pit will be located 100' from the drill hole. A line will be placed on the surface from the center hole to the pit. The pit will not be lined, but will be fenced on four sides to protect livestock/wildlife.
- c. Access to the well pad will be as shown on Exhibit "B".
- d. Natural runoff will be diverted around the well pad.

10. Plans for Restoration of Surface

- a. All surface areas not required for producing operations will be graded to as near original condition as possible and contoured to maintain possible erosion to a minimum.
- b. Available topsoil will be stockpiled and will be evenly distributed over the disturbed areas and the area will be reseeded as prescribed by the landowner.
- c. Pits and any other area that would present a hazard to wildlife or livestock will be fenced off when the rig is released and removed.

11. Surface Ownership:

- a. The wellsite and access road will be constructed on lands owned by the State of Utah, School and Institutional Trust Lands Administration. The operator shall contact the landowner representative and the Division of Oil, Gas and mining 48 hours prior to beginning construction activities.

12. **Other Information:**

- a. The primary surface use is farming and grazing. The nearest dwelling is approximately 3800 feet Southwest.
- b. Nearest live water is Price River located 12000' east.
- c. If there is snow on the ground when construction begins, it will be removed before the soil is disturbed and piled downhill from the topsoil stockpile location.
- d. The backslope and foreslope will be constructed no steeper than 4:1.
- e. All equipment and vehicles will be confined to the access road and well pad.
- f. A complete copy of the approved Application for Permit to Drill (APD) including conditions and stipulations, shall be on the wellsite during construction and drilling operations

There will be no deviation from the proposed drilling and/or workover program without prior approval from the Division of Oil, Gas & Mining.

13. Company Representative

Jean Semborski
Permitting Analyst
Phillips Petroleum Company
6825 S. 5300 W. P.O. Box 851
Price, Utah 84501
(435) 613-9777
(435) 820-9807

Mail Approved A.P.D. To:

Company Representative


Excavation Contractor

Nelco Contractors Inc.
Larry Jensen
(435) 637-3495
(435) 636-5268


14. Certification

I hereby certify that I, or persons under my direct supervision have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct, and that the work associated with the operations proposed herein will be performed by Phillips Petroleum Company and its subcontractors in conformity with this plan and the terms and conditions under which it is approved.

8/31/01
Date


Jean Semborski
Permitting Analyst
Phillips Petroleum Company

ELEVATION OF UNGRADED GROUND AT LOCATION STAKE = 6046.8'
 ELEVATION OF GRADED GROUND AT LOCATION STAKE = 6046.3'

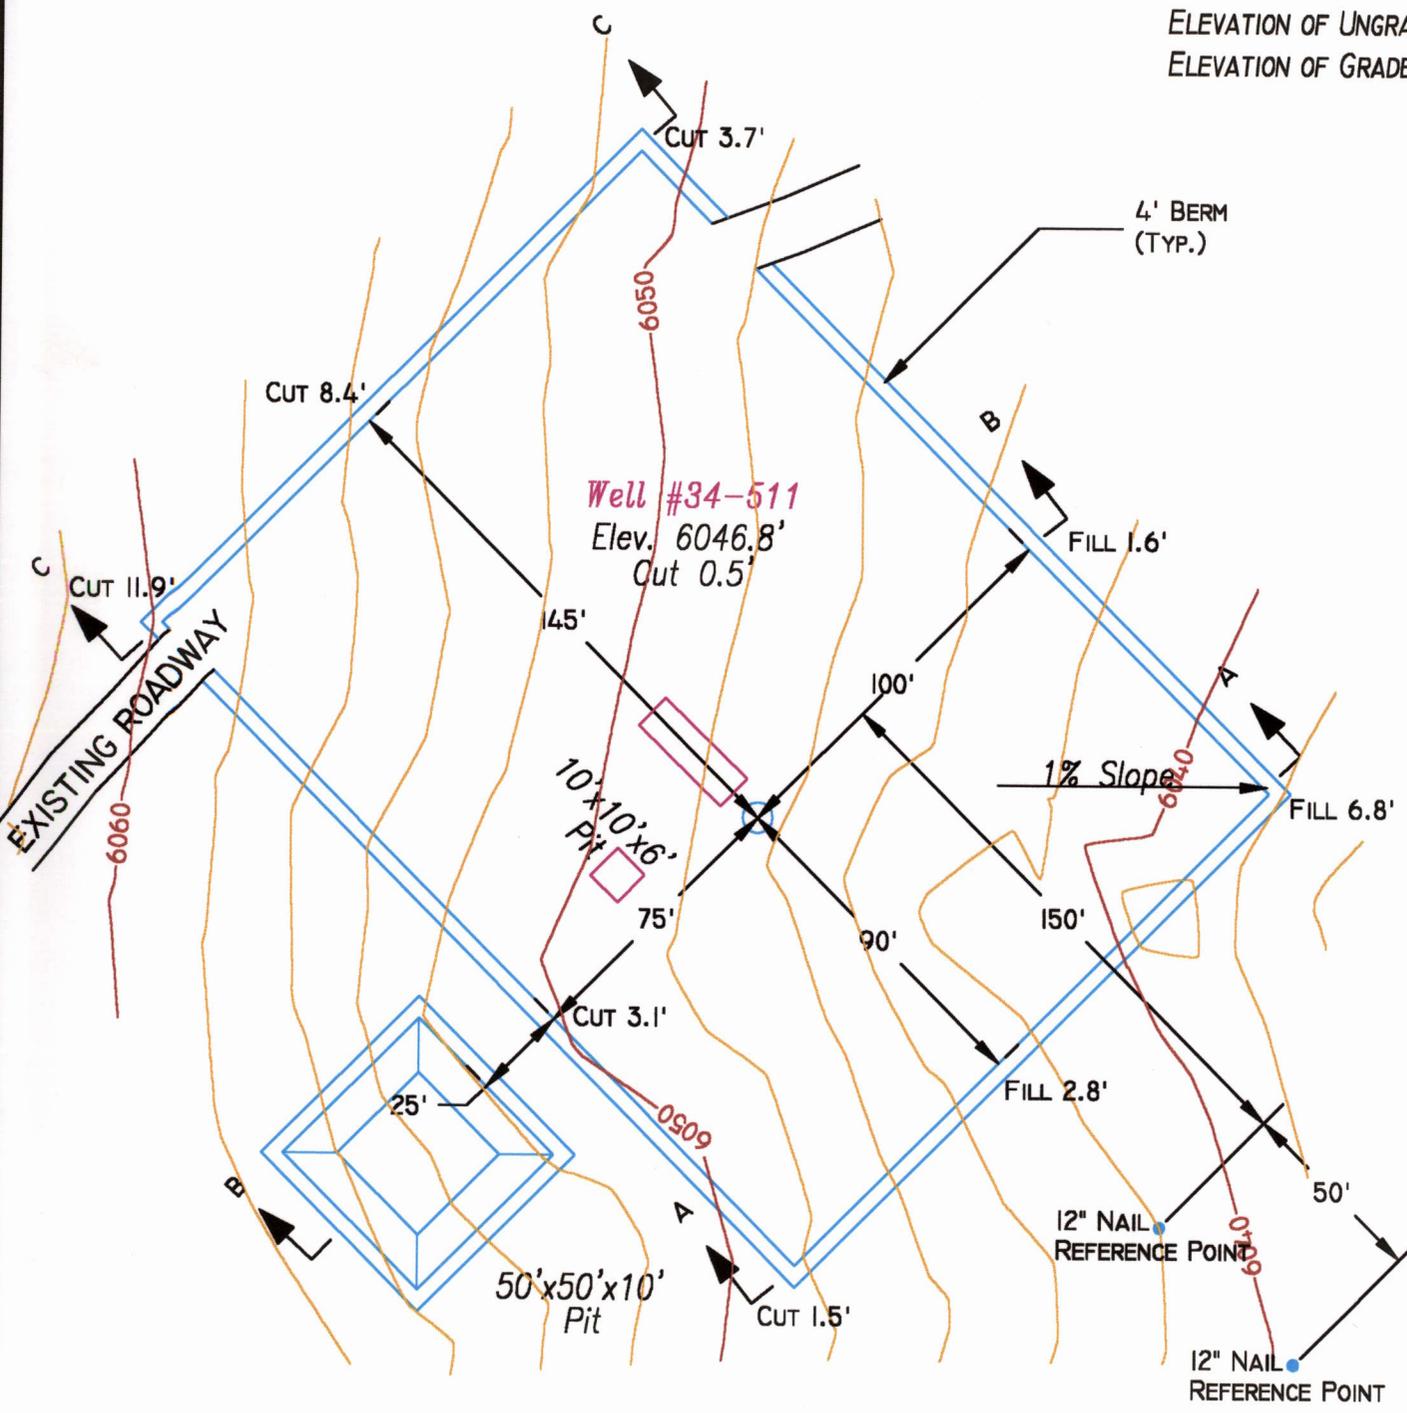

Talon Resources, Inc.
 375 South Carbon Avenue, Suite 101
 Price, Utah 84501
 Ph: 435-637-8781
 Fax: 435-636-8603




**PHILLIPS PETROLEUM
 LOCATION LAYOUT**

Section 34, T13S, R9E, S.L.B.&M.

WELL #34-511

Drawn By: M. MOON	Checked By: L.W.J.
Drawing No. A-2	Date: 08/03/01
	Scale: 1" = 50'
Sheet 2 of 4	Job No. 000

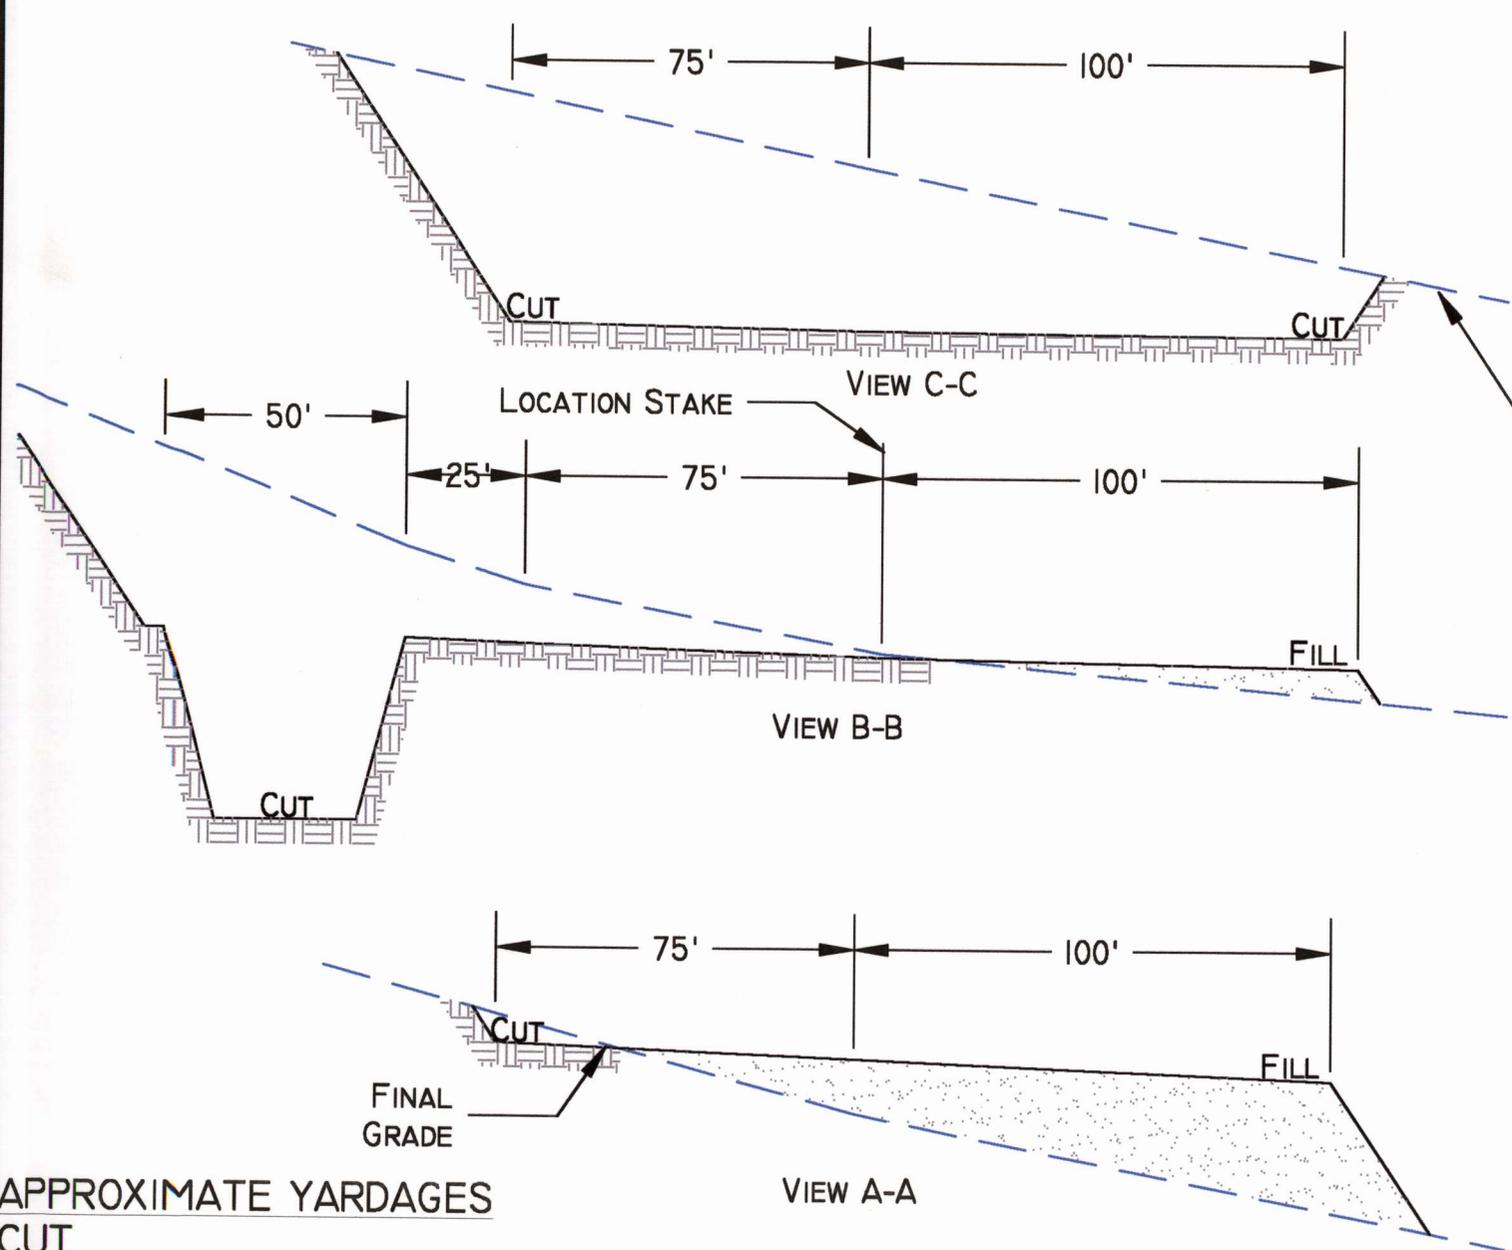

1"=10'
X-Section
Scale
1"=40'

PRECONSTRUCTION
GRADE

SLOPE = 1 1/2 : 1
(EXCEPT PIT)
PIT SLOPE = 1 : 1





Talon Resources, Inc.
375 South Carbon Avenue, Suite 101
Price, Utah 84501
Ph: 435-637-8781
Fax: 435-636-8603



PHILLIPS PETROLEUM
TYPICAL CROSS SECTION
Section 34, T13S, R9E, S.L.B.&M.
WELL #34-511

Drawn By: M. MOON	Checked By: L.W.J.
Drawing No. C-1	Date: 08/03/01
	Scale: 1" = 40'
Sheet 3 of 4	Job No. 410

APPROXIMATE YARDAGES
CUT
(6") TOPSOIL STRIPPING = 750 CU. YDS.
REMAINING LOCATION = 7,929.2 CU, YDS.
TOTAL CUT = 8,579.2 CU. YDS.
TOTAL FILL = 1,238.1 CU. YDS.

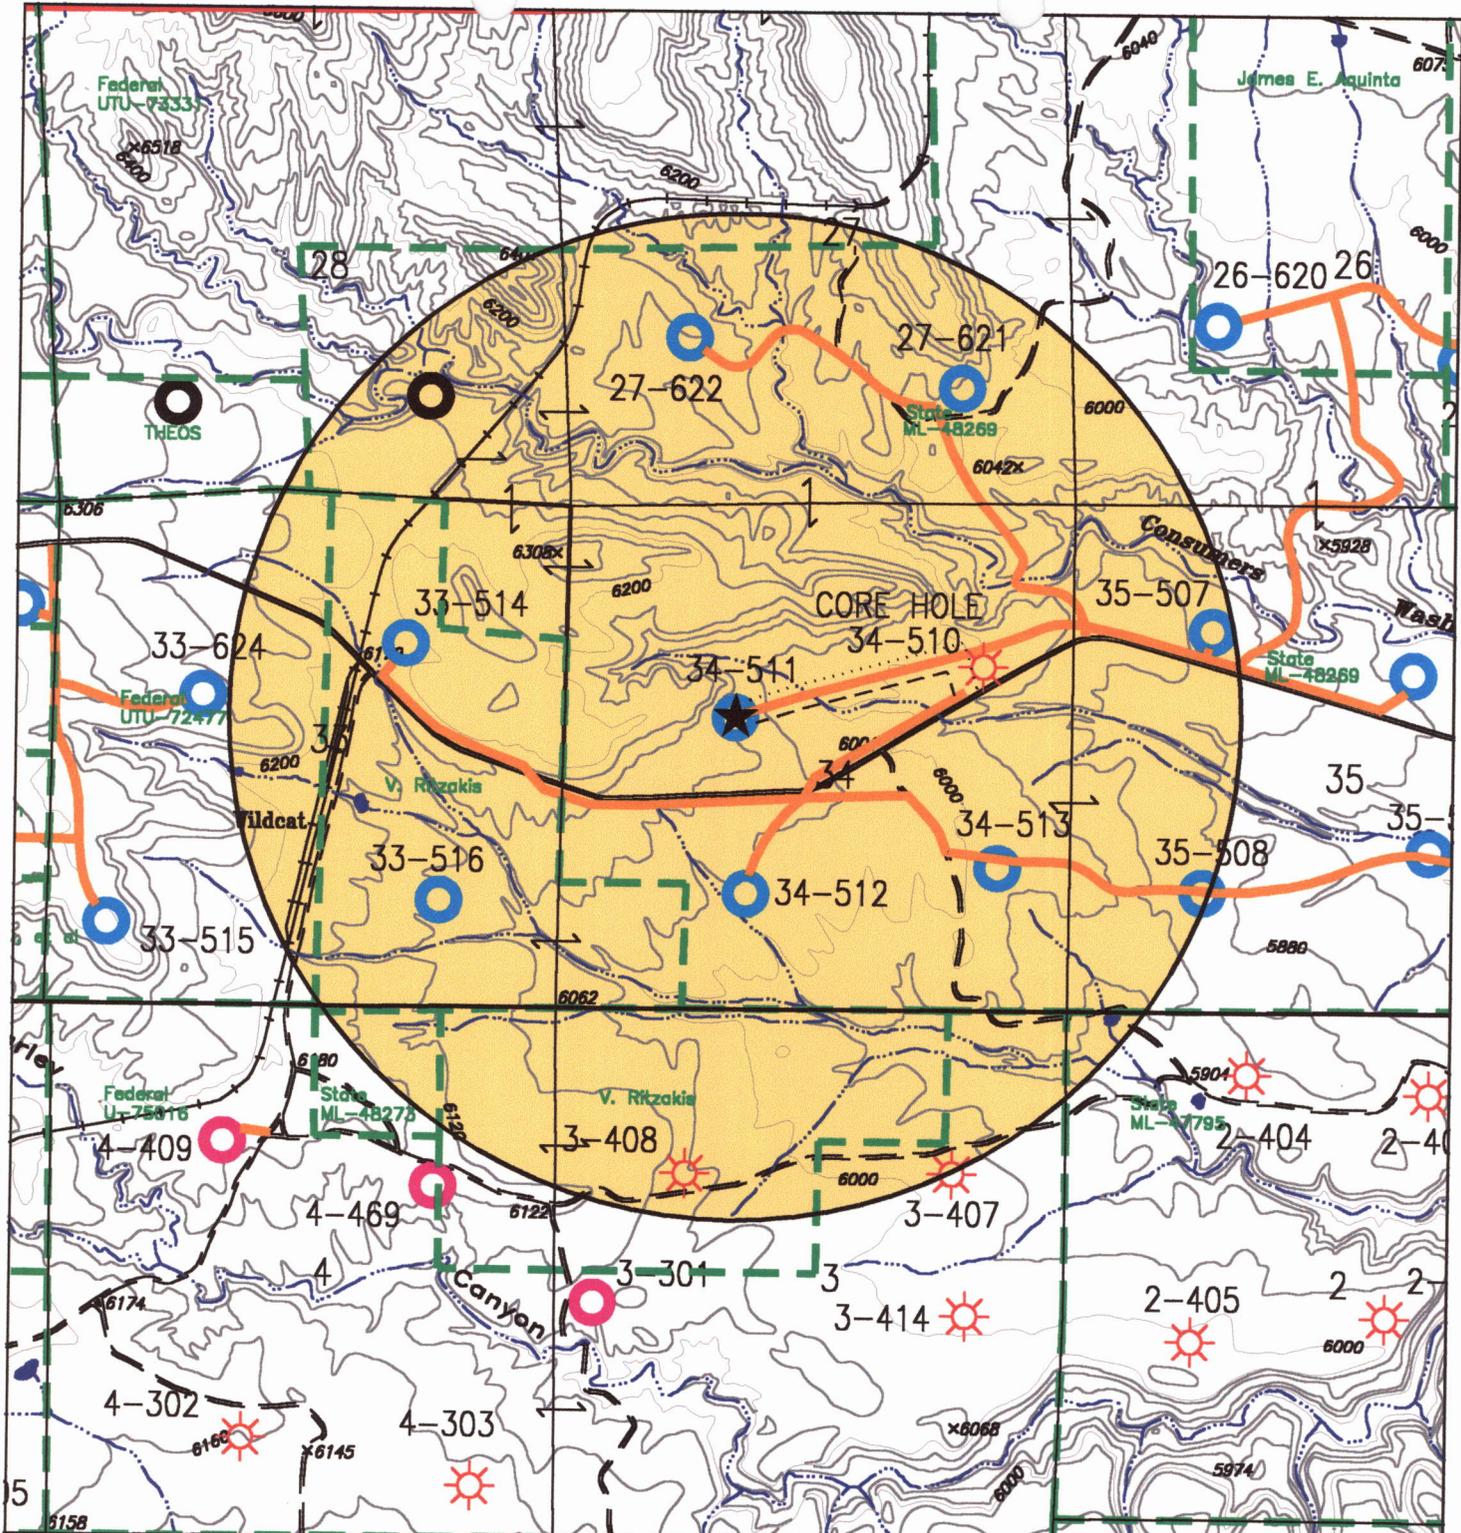

LEGEND


- Proposed Well Location: *
- Other Proposed Well Locations: ○
- Proposed Powerline: - - -
- Proposed Pipeline: ———
- Proposed Roads: - · - · -
- Lease Boundary: ———
- Existing Wells: *

Scale - 1" = 2000'

PHILLIPS PETROLEUM COMPANY
 6825 South 5300 West
 P.O. Box 851
 Price, Utah 84501
 Phone: (435) 613-9777
 Fax: (435) 613-9782



WELL # 34-511
Section 34, T13S, R9E, S.L.B.&M.

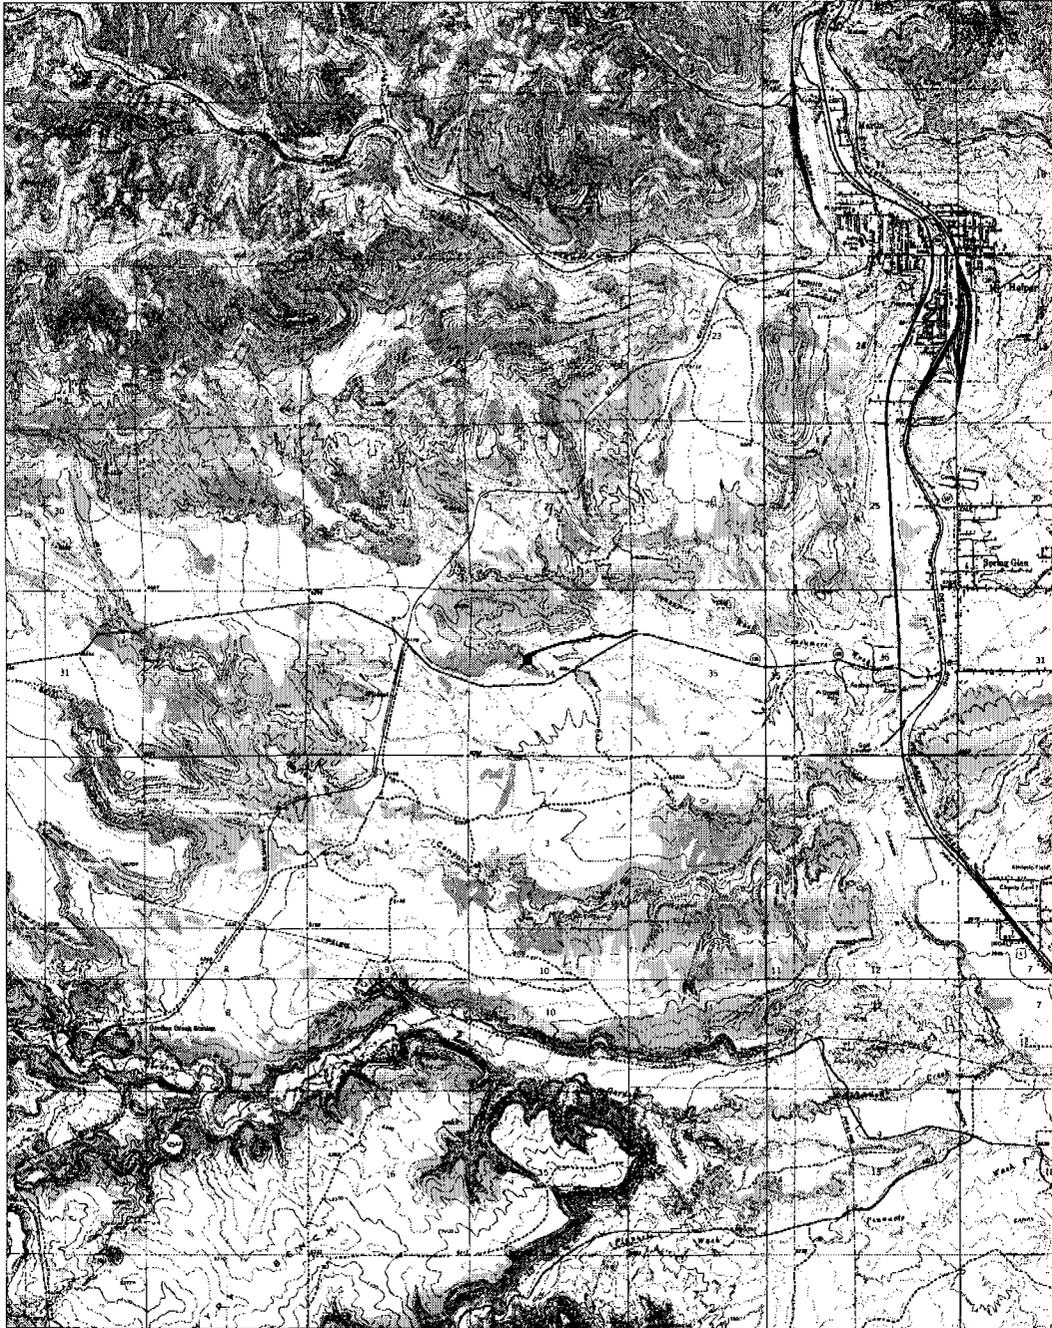

Utah 34-511

Section 34, T13S, R9E

UTM
12 North
NAD 1927 (Western US)



Scale 1:75,000
0 8,000
Feet

UT34511A.ssf
8/27/2001

GPS Pathfinder[®] Office



APPROXIMATE LAYOUT OF RIG & EQUIPMENT




LIGHT PLANT




LIGHT PLANT

40'



PIPE TRAILER

HOLE

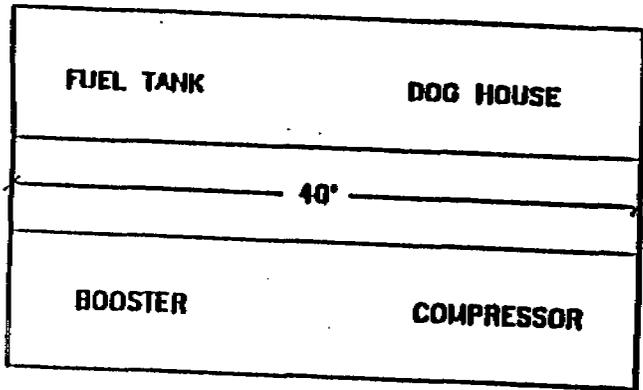

FUEL TANK


DOG HOUSE

40'

BOOSTER

COMPRESSOR

45'

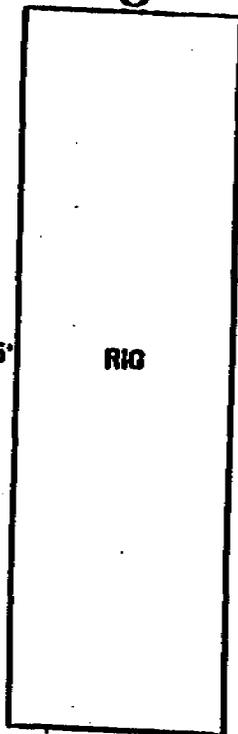

RIG

8'




SURFACE CUTTINGS PIT


20'




AUX COMP.




FRAC TANK

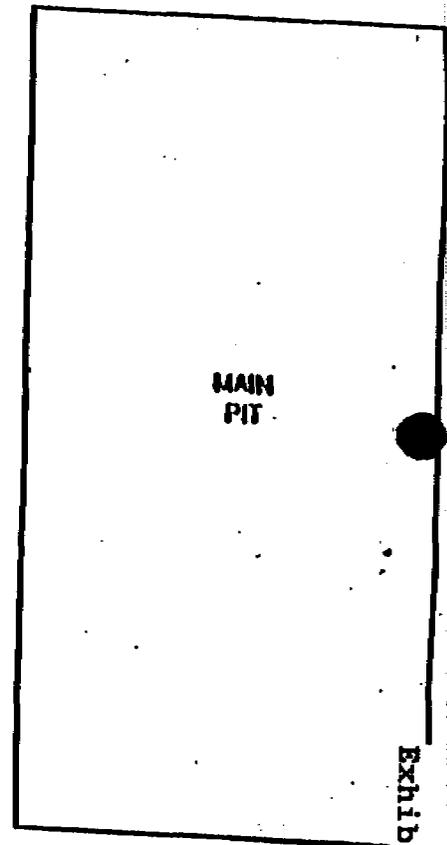

MAIN PIT

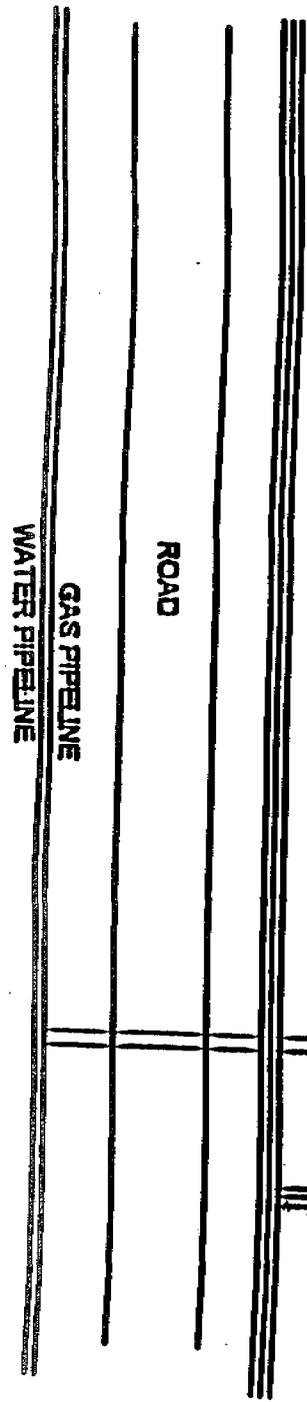

○ ANCHOR (TYP. 4 PL.)

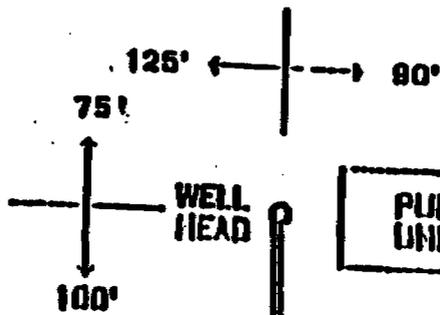

MOTOR


GAS/WATER

3-PHASE
ELEC.

SEPARATOR

RTU
STARTER


TRANSFORMER




RIVER GAS CORP.
WELL SITE LAYOUT
215' X 175'

Exhibit "B"

TYPICAL ROAD CROSS-SECTION

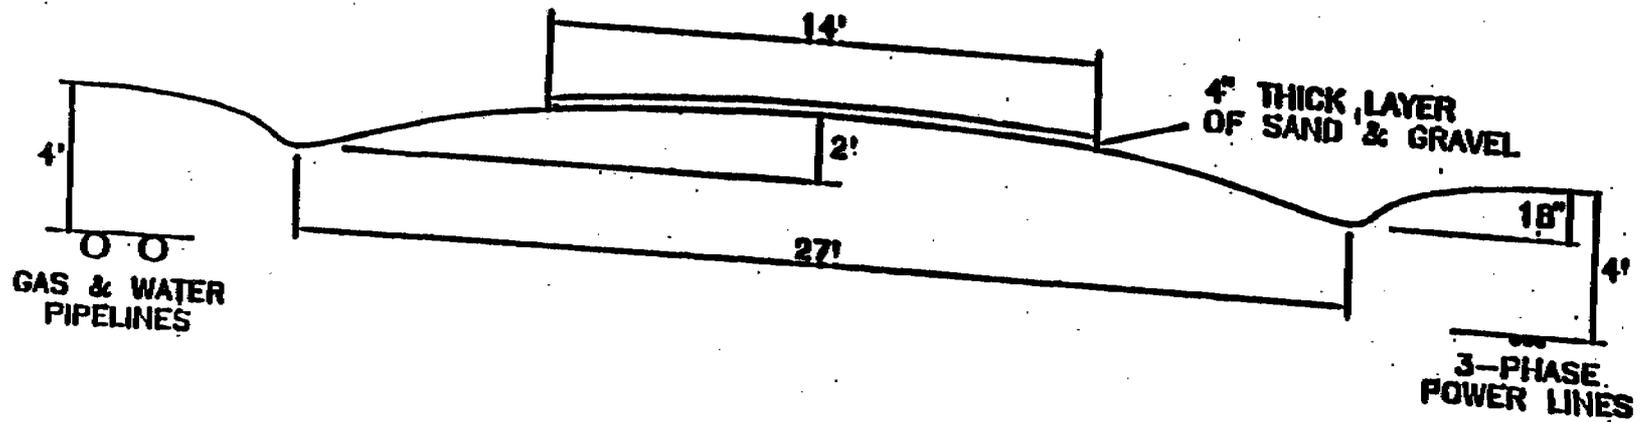


DIVERTER HEAD

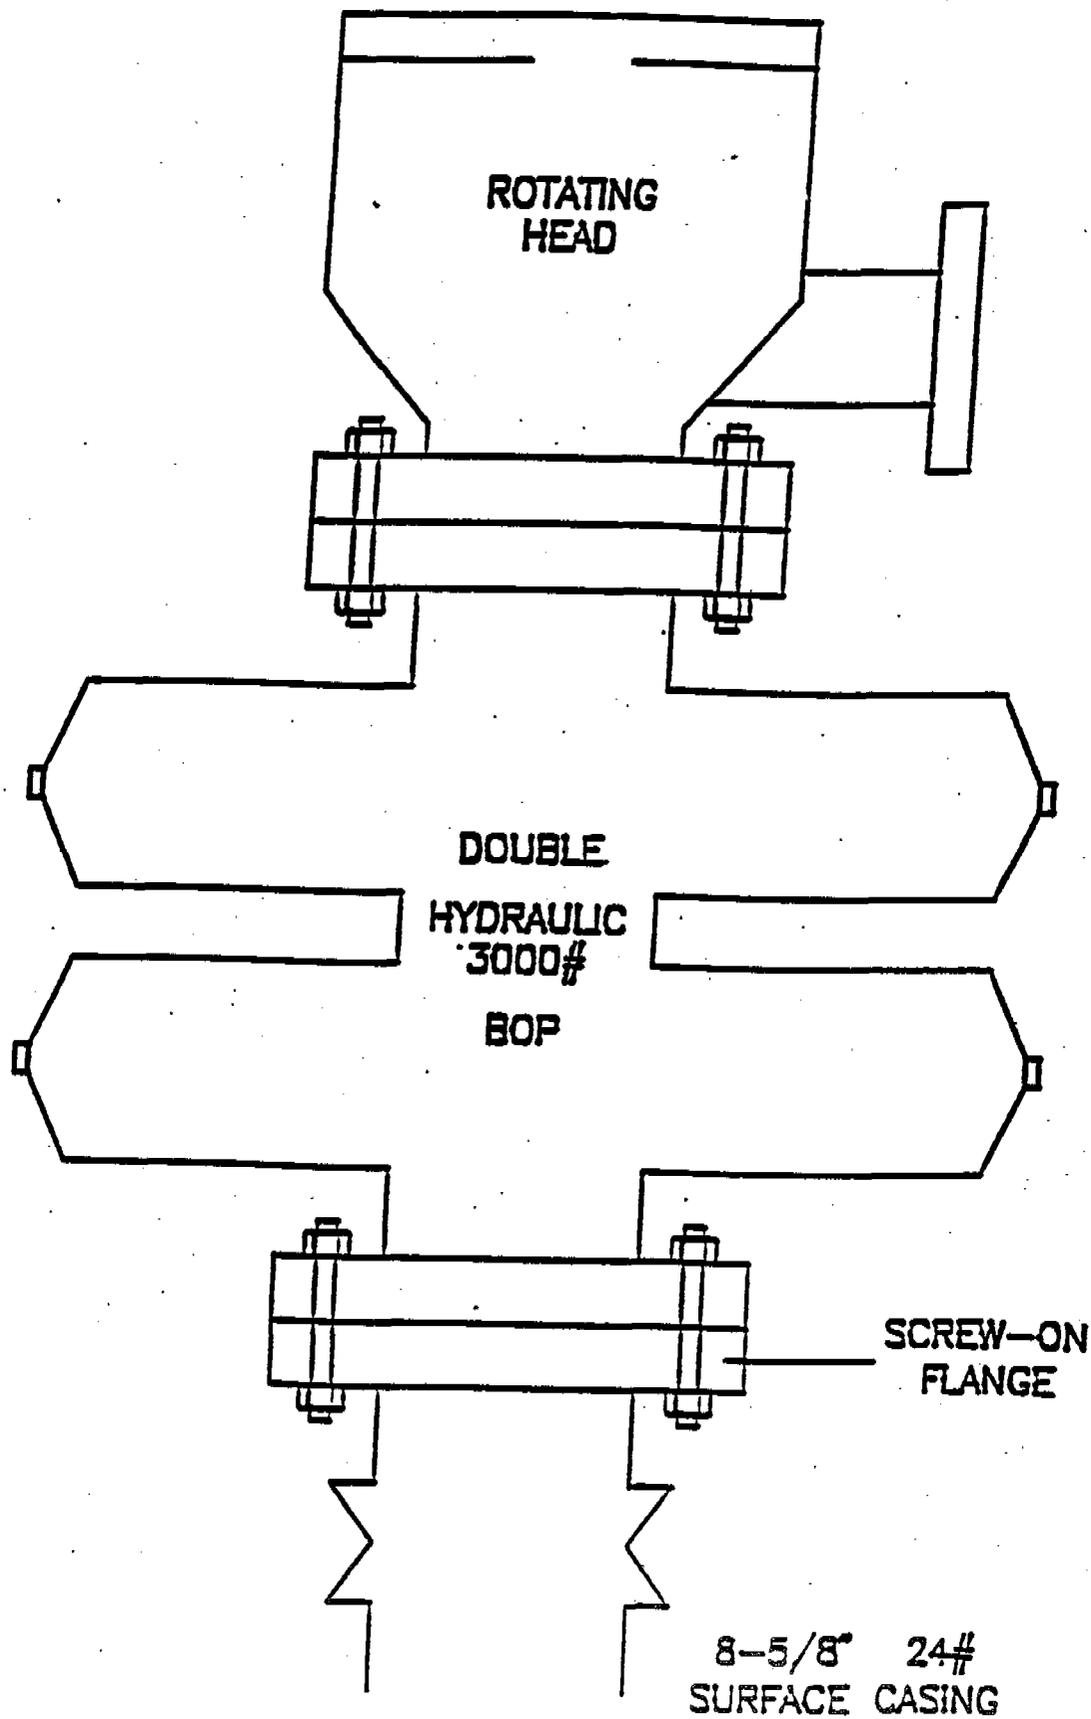

- (1) 2" 5M FLANGED CHOKE
- (2) 2" 5M GATE VALVE (FLANGED)
- (3) 2" 5M STUDDED CROSS
- (4) 2" 5M GATE VALVE (FLANGED)
- (5) 2" 5M FLANGED CHOKE
- (6) 2" 5M GATE VALVE (FLANGED)
- (7) 2" LINE
- (8) 2" 5M GATE VALVE (FLANGED)
- (9) 3000# GAUGE

NOTE:
NUMBER 8 GATE VALVE
SITS ON TOP OF MANIFOLD
BETWEEN STUDDED CROSS
AND 3000# GAUGE.

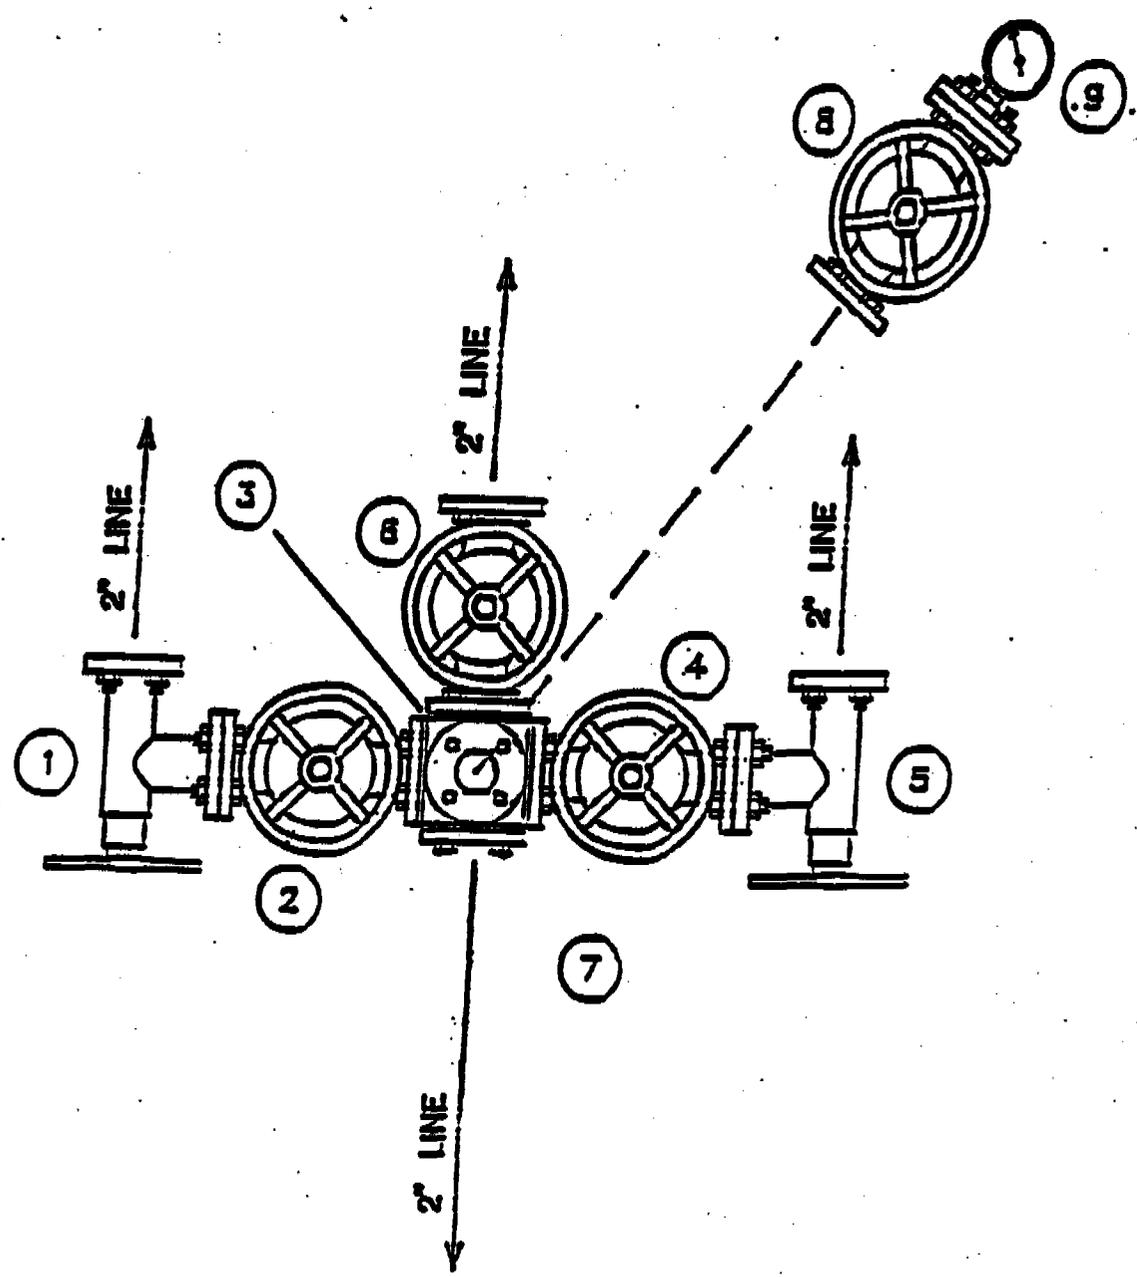

TO BOP

AND A NEW 2" BALL VALVE
FULL OPEN 5000PSI

MANIFOLD

STATE OF UTAH
BOND OF LESSEE

KNOW ALL MEN BY THESE PRESENTS, that we Phillips Petroleum Company
of Bartlesville, Oklahoma as principal and
Safeco Insurance Company of America as surety, are held and firmly bound
unto the State of Utah in the sum of Two Hundred Thousand Dollars (\$200,000.00) lawful money of the United States
to be paid to the School & Institutional Trust Lands Administration, as agent for the State of Utah, for the use and benefit
of the State of Utah, and of any patentee or purchaser of any portion of the land covered by the hereinafter described
lease heretofore sold or which may hereafter be sold with a reservation to the State of Utah, on the surface or of other
mineral deposits of any portion of such lands, for which payment, well and truly to be made, we bind ourselves, and each
of us, and each of our heirs, executors, administrators, successors, sublessees, and assignees, jointly and severally by
these presents.

Signed with our hands and seals this 31st day of January, 192001

The condition of the foregoing obligation is such that,

WHEREAS: The State of Utah, as Lessor, issued a(n) _____
lease, Lease Number _____ and dated _____ to _____
as lessee (and said lease has been duly assigned under date of _____
to _____) to drill for, mine, extract, and remove all of the _____
deposits in and under the following described lands, to wit:

Statewide Blanket Bond to cover all operations on state of Utah lands.

NOW, THEREFORE, the principal and surety shall be obligated to pay all monies, rentals, royalties, costs of
reclamation, damages to the surface and improvements thereon and any other damages, costs, expenses, penalties, interest
or liabilities which arise by operation of or in connection with the above described lease(s) accruing to the Lessor and
shall fully comply with all other terms and conditions of said lease, the rules, regulations, and policies relating thereto
of the School & Institutional Trust Lands Administration, the Board of Oil, Gas and Mining, and the Division of Oil,
Gas and Mining as they may now exist or may from time to time be modified or amended. This obligation is in effect
even if the principal has conveyed part of its interest to a successor in interest. If the principal fully satisfies the above
described obligations, then the surety's obligation to make payment to the State of Utah is void and of no effect.
otherwise, it shall remain in full force and effect until released by the School & Institutional Trust Lands Administration.

Signed, sealed and delivered
in the presence of

Jerry L. Hicks
Witness

PHILLIPS PETROLEUM COMPANY

R. B. Gisi (SEAL)
R. B. Gisi Principal Asst. Treasurer

Jerry L. Hicks
Witness

BONDING COMPANY SAFECO INSURANCE COMPANY OF AMERICA

BY Betty G. Miller
Betty G. Miller, Attorney-in-Fact
Attest: [Signature]
Secretary
Resident Agent: N/A

APPROVED AS TO FORM:
JAN GRAHAM
ATTORNEY GENERAL

By [Signature]

Bonding Co. Address: Millenium Corp. Park, Bldg. C, 18400 NE Union Hill Rd
Redmond, WA 98052
Corporate Seal of Bonding Company Must be Affixed.



POWER OF ATTORNEY

SAFECO INSURANCE COMPANY OF AMERICA
GENERAL INSURANCE COMPANY OF AMERICA
HOME OFFICE SAFECO PLAZA
SEATTLE, WASHINGTON 98185

No. 8718

KNOW ALL BY THESE PRESENTS:

That SAFECO INSURANCE COMPANY OF AMERICA and GENERAL INSURANCE COMPANY OF AMERICA, each a Washington corporation, does each hereby appoint
*****SANDRA L. HABERLY; BETTY J. MILLER, Bartlesville, Oklahoma*****

its true and lawful attorney(s)-in-fact, with full authority to execute on its behalf fidelity and surety bonds or undertakings and other documents of a similar character issued in the course of its business, and to bind the respective company thereby.

IN WITNESS WHEREOF, SAFECO INSURANCE COMPANY OF AMERICA and GENERAL INSURANCE COMPANY OF AMERICA have each executed and attested these presents

this 27th day of September, 19 93

R A Pierson

R.A. PIERSON, SECRETARY

W Randall Stoddard

W. RANDALL STODDARD, PRESIDENT

CERTIFICATE

Extract from the By-Laws of SAFECO INSURANCE COMPANY OF AMERICA
and of GENERAL INSURANCE COMPANY OF AMERICA:

"Article V, Section 13. - FIDELITY AND SURETY BONDS . . . the President, any Vice President, the Secretary, and any Assistant Vice President appointed for that purpose by the officer in charge of surety operations, shall each have authority to appoint individuals as attorneys-in-fact or under other appropriate titles with authority to execute on behalf of the company fidelity and surety bonds and other documents of similar character issued by the company in the course of its business . . . On any instrument making or evidencing such appointment, the signatures may be affixed by facsimile. On any instrument conferring such authority or on any bond or undertaking of the company, the seal, or a facsimile thereof, may be impressed or affixed or in any other manner reproduced; provided, however, that the seal shall not be necessary to the validity of any such instrument or undertaking."

Extract from a Resolution of the Board of Directors of SAFECO INSURANCE COMPANY OF AMERICA
and of GENERAL INSURANCE COMPANY OF AMERICA adopted July 28, 1970.

"On any certificate executed by the Secretary or an assistant secretary of the Company setting out,

- (i) The provisions of Article V, Section 13 of the By-Laws, and
- (ii) A copy of the power-of-attorney appointment, executed pursuant thereto, and
- (iii) Certifying that said power-of-attorney appointment is in full force and effect,

the signature of the certifying officer may be by facsimile, and the seal of the Company may be a facsimile thereof."

I, R. A. Pierson, Secretary of SAFECO INSURANCE COMPANY OF AMERICA and of GENERAL INSURANCE COMPANY OF AMERICA, do hereby certify that the foregoing extracts of the By-Laws and of a Resolution of the Board of Directors of these corporations, and of a Power of Attorney issued pursuant thereto, are true and correct, and that both the By-Laws, the Resolution and the Power of Attorney are still in full force and effect.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the facsimile seal of said corporation

INs 27th day of January, 192001



R A Pierson

R.A. PIERSON, SECRETARY

Registered trademark of SAFECO Corporation.

002

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 09/17/2001

API NO. ASSIGNED: 43-007-30816

WELL NAME: UTAH 34-511
OPERATOR: PHILLIPS PETROLEUM (N1475)
CONTACT: JEAN SEMBORSKI

PHONE NUMBER: 435-613-9777

PROPOSED LOCATION:

SENW 34 130S 090E
SURFACE: 2238 FNL 1789 FWL
BOTTOM: 2238 FNL 1789 FWL
CARBON
UNDESIGNATED (2)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	DkD	2/15/02
Geology		
Surface		

LEASE TYPE: 3 - State
LEASE NUMBER: ~~ML-48629~~ ML-48269 *lc*
SURFACE OWNER: 3 - State

PROPOSED FORMATION: FRSD

RECEIVED AND/OR REVIEWED:


- Plat
- Bond: Fed[] Ind[] Sta[3] Fee[]
(No. 5952189)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. PRWID)
- RDCC Review (Y/N)
(Date:)
- Fee Surf Agreement (Y/N)

LOCATION AND SITING:


- R649-2-3. Unit DRUNKARDS WASH
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: 243-6
Eff Date: 2-14-2001
Siting: 460 ft Unit Boundary & Uncomm. Tract
- R649-3-11. Directional Drill

COMMENTS: Need presite. (1-18-02)

STIPULATIONS: 1-Statement of basis.

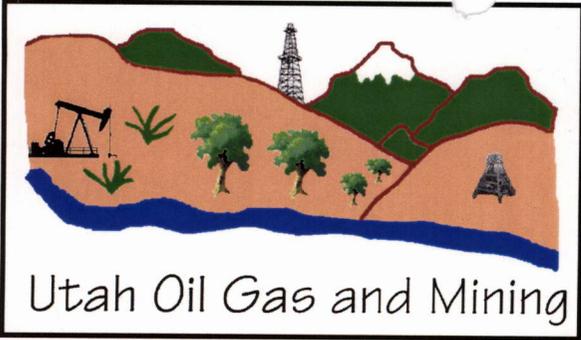

OPERATOR: PHILLIPS PETRO CO (N1475)
 SEC. 33,34 & 35, T13S, R9E
 FIELD: UNDESIGNATED (002)
 COUNTY: CARBON UNIT: DRUNKARDS WASH
 CAUSE: 243-6

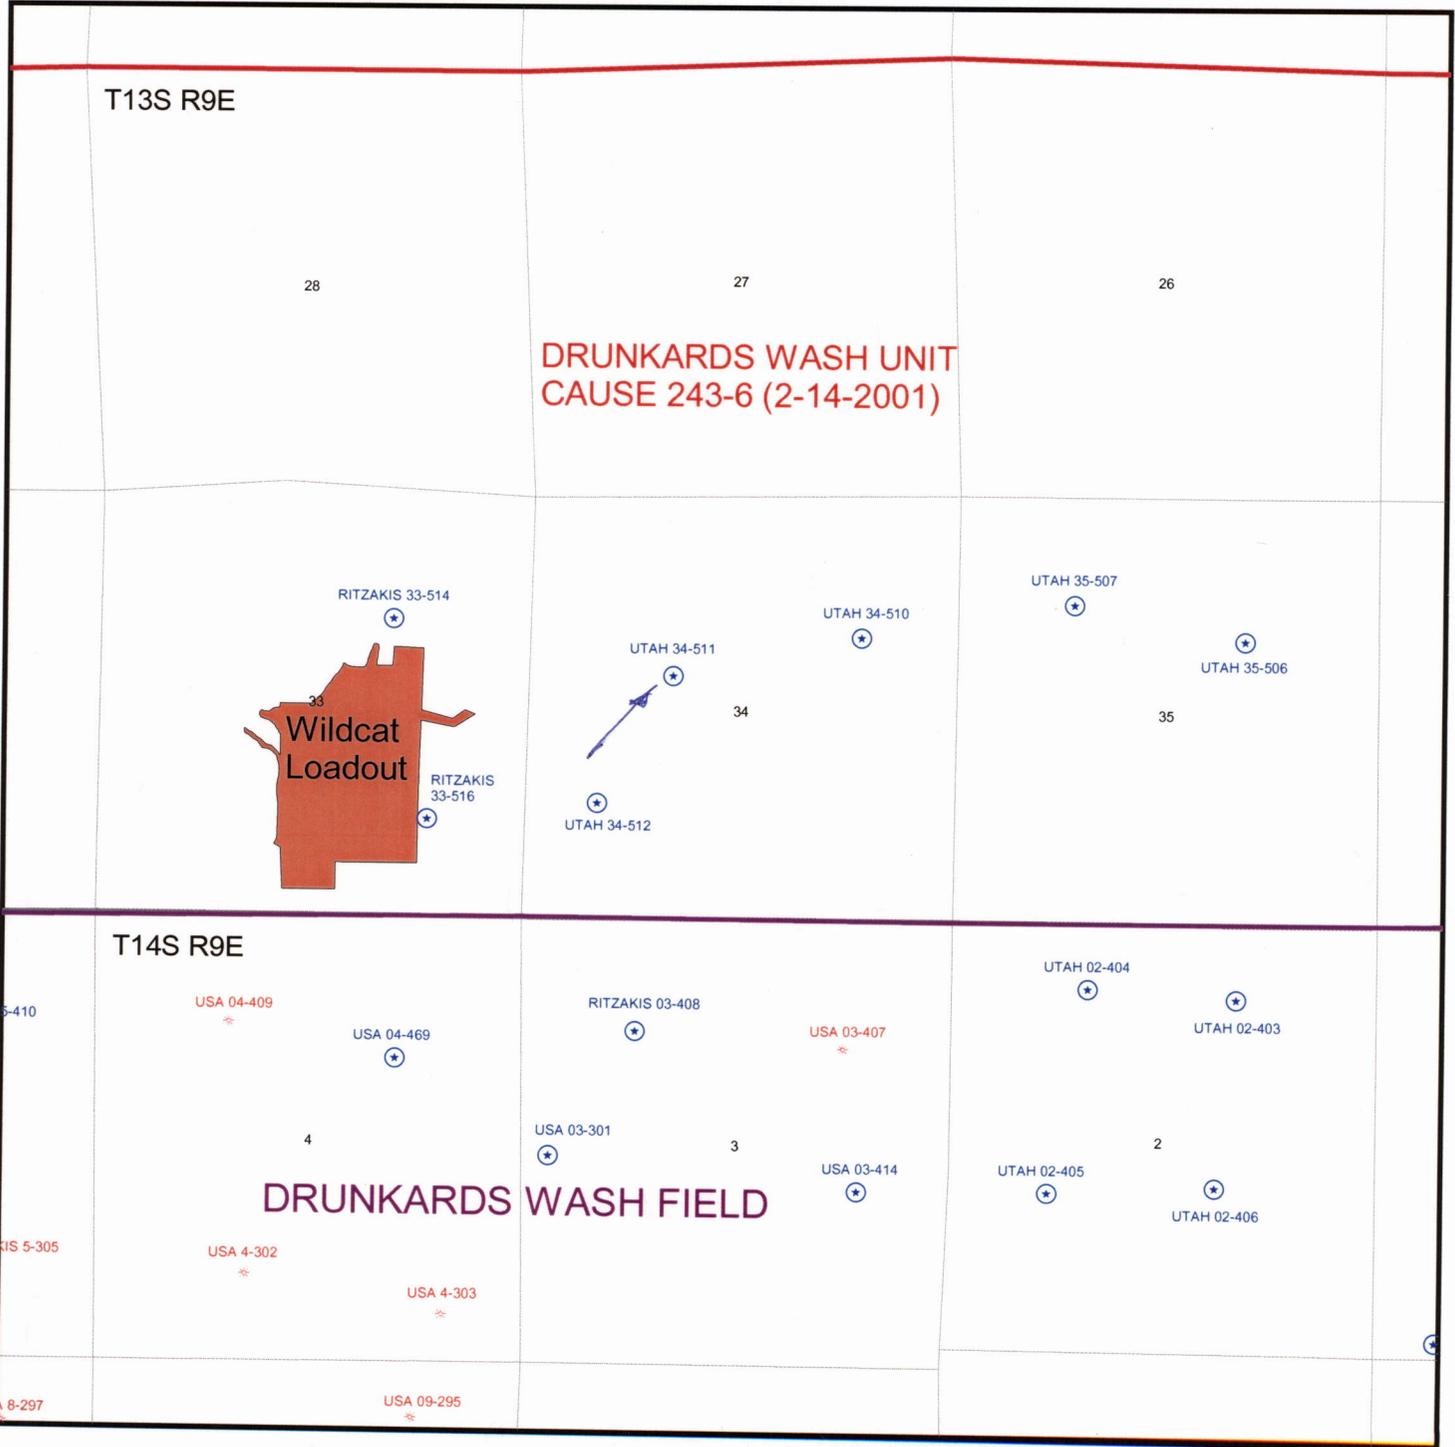

ON-SITE PREDRILL EVALUATION
Division of Oil, Gas and Mining

OPERATOR: Phillips
WELL NAME & NUMBER: Utah 34-511
API NUMBER: 463-007-30816
LEASE: State FIELD/UNIT: _____
LOCATION: 1/4,1/4 SENW Sec: 34 TWP: 13 S RNG: 9E 2238 FNL 1789 FWL
LEGAL WELL SITING: 460 F Unit boundary and uncommitted tracts.
GPS COORD (UTM): X = 508356 E; Y = 4389052 N SURFACE OWNER: SITLA

PARTICIPANTS

M. Jones (DOGM), J. Semborski (Phillips), L. Jensen (NELCO), C. Colt (DWR), SITLA was invited but chose not to attend the onsite.

REGIONAL/LOCAL SETTING & TOPOGRAPHY

Proposed location is ~4 miles NW of Price, Utah and ~2.5 miles SW of Helper Utah. The direct area drains to the Northeast into Consumers Wash then Eastward into the Price River, a year-round live water source. Dry washes run throughout the area. Small shale hills surround the location.

SURFACE USE PLAN

CURRENT SURFACE USE: Wildlife habitat and grazing.

PROPOSED SURFACE DISTURBANCE: 235' x 175' and a 50' x 50' x 10' pit.

LOCATION OF EXISTING WELLS WITHIN A 1 MILE RADIUS: 9 proposed wells and 2 existing wells are within a 1 mile radius of the above proposed well.

LOCATION OF PRODUCTION FACILITIES AND PIPELINES: Along roadside.

SOURCE OF CONSTRUCTION MATERIAL: Obtained locally and transported in.

ANCILLARY FACILITIES: None anticipated.

WASTE MANAGEMENT PLAN:

Portable chemical toilets which will be emptied into the municipal waste treatment system; garbage cans on location will be emptied into centralized dumpsters which will be emptied into an approved landfill. Crude oil production is unlikely. Drilling fluid, completion / frac fluid and cuttings will be buried in the pit after evaporation and slashing the pit liner. Produced water will be gathered to the evaporation pit and eventually injected into the Navajo Sandstone via a salt water disposal well. Used oil from drilling operations and support is hauled to a used oil recycler and reused.

ENVIRONMENTAL PARAMETERS

AFFECTED FLOODPLAINS AND/OR WETLANDS: Dry washes.

FLORA/FAUNA: Pinion Juniper, Sagebrush, grasses, Elk, deer, small game, rodents.

SOIL TYPE AND CHARACTERISTICS: Clay.

EROSION/SEDIMENTATION/STABILITY: Stable until disturbed.

PALEONTOLOGICAL POTENTIAL: None observed.

RESERVE PIT

CHARACTERISTICS: Dugout earthen pit.

LINER REQUIREMENTS (Site Ranking Form attached): None required.

SURFACE RESTORATION/RECLAMATION PLAN

As per surface use agreement.

SURFACE AGREEMENT: Yes.

CULTURAL RESOURCES/ARCHAEOLOGY: Arch study on file with state.

OTHER OBSERVATIONS/COMMENTS

ATTACHMENTS

Photos of this location were taken and placed on file.

Mark L. Jones
DOGM REPRESENTATIVE

January 18, 2002 / 2:20 pm
DATE/TIME

**Evaluation Ranking Criteria and Ranking Score
For Reserve and Onsite Pit Liner Requirements**

<u>Site-Specific Factors</u>	<u>Ranking</u>	<u>Site Ranking</u>
Distance to Groundwater (feet)		
>200	0	
100 to 200	5	
75 to 100	10	
25 to 75	15	
<25 or recharge area	20	<u>0</u>
Distance to Surf. Water (feet)		
>1000	0	
300 to 1000	2	
200 to 300	10	
100 to 200	15	
< 100	20	<u>0</u>
Distance to Nearest Municipal Well (feet)		
>5280	0	
1320 to 5280	5	
500 to 1320	10	
<500	20	<u>0</u>
Distance to Other Wells (feet)		
>1320	0	
300 to 1320	10	
<300	20	<u>0</u>
Native Soil Type		
Low permeability	0	
Mod. permeability	10	
High permeability	20	<u>10</u>
Fluid Type		
Air/mist	0	
Fresh Water	5	
TDS >5000 and <10000	10	
TDS >10000 or Oil Base Mud Fluid	15	
containing significant levels of hazardous constituents	20	<u>0</u>
Drill Cuttings		
Normal Rock	0	
Salt or detrimental	10	<u>0</u>
Annual Precipitation (inches)		
<10	0	
10 to 20	5	
>20	10	<u>0</u>
Affected Populations		
<10	0	
10 to 30	6	
30 to 50	8	
>50	10	<u>0</u>
Presence of Nearby Utility Conduits		
Not Present	0	
Unknown	10	
Present	15	<u>0</u>

Final Score 10 (Level III Sensitivity)

Sensitivity Level I = 20 or more; total containment is required.

Sensitivity Level II = 15-19; lining is discretionary.

Sensitivity Level III = below 15; no specific lining is required.

**DIVISION OF OIL, GAS AND MINING
APPLICATION FOR PERMIT TO DRILL
STATEMENT OF BASIS**

OPERATOR: Phillips
WELL NAME & NUMBER: Utah 34-511
API NUMBER: 43-007-30816
LOCATION: 1/4,1/4 SENW Sec: 34 TWP: 13S RNG: 9E 2238 FNL 1789 FWL

Geology/Ground Water:

The sandy, silty, moderately permeable soil is developed on the Blue Gate Member of the Mancos Shale. The Garley Canyon Sandstone Beds of the Blue Gate Member of the Mancos Shale are likely to be present at this location. If the Garley Canyon Sandstone Beds are present (probable) and wet (possible - standing water was found in upper Garley Canyon Beds in Pinnacle Canyon ~5.5 miles southwest), these strata should be included within the interval protected by the surface casing string. The operator is informed of the potential for wet Garley Canyon Beds and will respond to protect the zones by extending the surface casing string as needed. Extending the proposed casing and cement will adequately isolate any shallow zones containing water. Five water rights have been filed on waters in Wildcat Canyon Creek.

Reviewer: Christopher J. Kierst **Date:** 2/11/2002


Surface:

Proposed location is ~4 miles NW of Price, Utah and ~2.5 miles SW of Helper Utah. The direct area drains to the Northeast into Consumers Wash then Eastward into the Price River, a year-round live water source. Dry washes run throughout the area. Small shale hills surround the location. DWR was present during the on-site however SITLA was invited but chose not to attend.

Reviewer: Mark L. Jones **Date:** January 23, 2002

Conditions of Approval/Application for Permit to Drill:

1. Culverts as needed where crossing drainages sufficient to handle run-off.
2. Berm the location and pit.

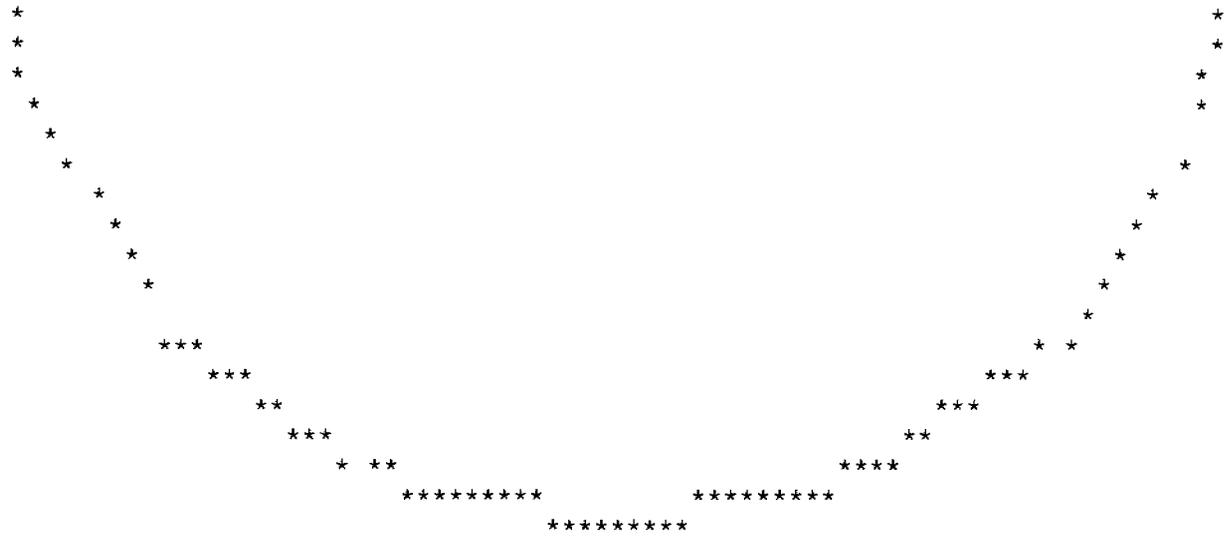

UTAH DIVISION OF WATER RIGHTS
NWPLAT POINT OF DIVERSION LOCATION PROGRAM

MAP CHAR	WATER RIGHT	QUANTITY CFS	AND/OR AC-FT	SOURCE DESCRIPTION or WELL INFO DIAMETER DEPTH YEAR LOG	POINT OF DIVERSION DESCRIPTION NORTH EAST CNR SEC TWN RNG B&
0	<u>91 3701</u>	.0000	.00	Wildcat Canyon Creek	
		WATER USE(S): USA Bureau of Land Management (Price Fie 125 South 600 West			PRIORITY DATE: 00/00/1 Price
1	<u>91 2547</u>	.0000	.00	Wildcat Canyon Creek	
		WATER USE(S): STOCKWATERING Jouflas, John 104 Maple Street			PRIORITY DATE: 00/00/1 Helper
2	<u>91 2547</u>	.0000	.00	Wildcat Canyon Creek	

WATER USE(S): STOCKWATERING
Jouflas, John

104 Maple Street

PRIORITY DATE: 00/00/1
Helper

3 91 2542 .0000

.00 Wildcat Canyon Creek

WATER USE(S):
Jouflas, John

104 Maple Street

PRIORITY DATE: 00/00/1
Helper

4 91 3702 .0000

.00 Wildcat Canyon Creek

WATER USE(S):
USA Bureau of Land Management (Price Fie 125 South 600 West

PRIORITY DATE: 00/00/1
Price

02-02 Phillips Utah 34-51

Casing Schematic

Surface

Markes
Shate

8-5/8"
MW 8.4
Frac 19.

TOC @
0.

Surface
350. MD

w/13% washout

TOC @
871.

BOP

BHP

$(0.052)(8.4)(3500) = 1529 \text{ psi}$

Anticipated = 1516 psi

Gas
 $(0.12)(3500) = 420 \text{ psi}$

MASP = 1109 psi

3M BOPE proposed

Adequate

OKD 2/15/02

2997'
Bluesky/
Ferron

w/15% washout

3027' - TOC rail

Coals & SS's

3207'

5-1/2"
MW 8.4

Production
3500. MD

Well name: **02-02 Phillips Utah 34-511**
 Operator: **Phillips Petroleum Company**
 String type: **Surface** Project ID: **43-007-30816**
 Location: **Carbon County**

Design parameters:

Collapse
 Mud weight: 8.400 ppg
 Design is based on evacuated pipe.

Burst

Max anticipated surface pressure: 0 psi
 Internal gradient: 0.436 psi/ft
 Calculated BHP: 153 psi
 No backup mud specified.

Minimum design factors:

Collapse:
 Design factor: 1.125

Burst:
 Design factor: 1.00

Tension:
 8 Round STC: 1.80 (J)
 8 Round LTC: 1.80 (J)
 Butress: 1.60 (J)
 Premium: 1.50 (J)
 Body yield: 1.50 (B)

Tension is based on air weight.
 Neutral point: 306 ft

Environment:

H2S considered? No
 Surface temperature: 65 °F
 Bottom hole temperature: 70 °F
 Temperature gradient: 1.40 °F/100ft
 Minimum section length: 130 ft

Cement top: Surface

Non-directional string.

Re subsequent strings:

Next setting depth: 3,500 ft
 Next mud weight: 8.400 ppg
 Next setting BHP: 1,527 psi
 Fracture mud wt: 19,000 ppg
 Fracture depth: 350 ft
 Injection pressure: 345 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost ()
1	350	8.625	24.00	J-55	ST&C	350	350	7.972	2293

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	153	1370	<u>8.97</u>	153	2950	<u>19.32</u>	8	244	<u>29.05 J</u>

Prepared by: Dustin Doucet
 Utah Dept. of Natural Resources

Phone: 801-538-5281
 FAX: 801-359-3940

Date: February 15, 2002
 Salt Lake City, Utah

ENGINEERING STIPULATIONS: NONE
 Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.
 Collapse is based on a vertical depth of 350 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes.
 Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	02-02 Phillips Utah 34-511	
Operator:	Phillips Petroleum Company	Project ID:
String type:	Production	43-007-30816
Location:	Carbon County	

Design parameters:

Collapse

Mud weight: 8.400 ppg
 Design is based on evacuated pipe.

Burst

Max anticipated surface pressure: 0 psi
 Internal gradient: 0.436 psi/ft
 Calculated BHP: 1,527 psi
 No backup mud specified.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Tension:

8 Round STC: 1.80 (J)
 8 Round LTC: 1.80 (J)
 Buttress: 1.60 (J)
 Premium: 1.50 (J)
 Body yield: 1.50 (B)

Tension is based on air weight.
 Neutral point: 3,054 ft

Environment:

H2S considered? No
 Surface temperature: 65 °F
 Bottom hole temperature: 114 °F
 Temperature gradient: 1.40 °F/100ft
 Minimum section length: 250 ft

Cement top: 871 ft

Non-directional string.

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost ()
1	3500	5.5	17.00	N-80	LT&C	3500	3500	4.767	25107

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	1527	6290	4.12	1527	7740	5.07	59	348	5.85 J

Prepared by: Dustin Doucet
 Utah Dept. of Natural Resources

Phone: 801-538-5281
 FAX: 801-359-3940

Date: February 15, 2002
 Salt Lake City, Utah

ENGINEERING STIPULATIONS: NONE

Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.
 Collapse is based on a vertical depth of 3500 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes.
 Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

003



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt
Governor

Kathleen Clarke
Executive Director

Lowell P. Braxton
Division Director

1594 West North Temple, Suite 1210

PO Box 145801

Salt Lake City, Utah 84114-5801

801-538-5340

801-359-3940 (Fax)

801-538-7223 (TDD)

February 19, 2002

Phillips Petroleum Company
PO Box 851
Price UT 84501

Re: Utah 34-511 Well, 2238' FNL, 1789' FWL, SE NW, Sec. 34, T. 13 South, R. 9 East,
Carbon County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-007-30816.

Sincerely,

A handwritten signature in black ink, appearing to read "John R. Baza".

John R. Baza
Associate Director

er

Enclosures

cc: Carbon County Assessor
SITLA
Bureau of Land Management, Moab Field Office

Operator: Phillips Petroleum Company
Well Name & Number Utah 34-511
API Number: 43-007-30816
Lease: ML 48269

Location: SE NW Sec. 34 T. 13 South R. 9 East

Conditions of Approval

1. **General**

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. **Notification Requirements**

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- 24 hours prior to cementing or testing casing
- 24 hours prior to testing blowout prevention equipment
- 24 hours prior to spudding the well
- within 24 hours of any emergency changes made to the approved drilling program
- prior to commencing operations to plug and abandon the well

The following are Division of Oil, Gas and Mining contacts and their work telephone numbers (please leave a voice mail message if the person is not available to take the call):

- Dan Jarvis at (801) 538-5338
- Carol Daniels at (801) 538-5284 (spud)

3. **Reporting Requirements**

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.

5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)

004

DIVISION OF OIL, GAS AND MINING

CONFIDENTIAL

SPUDDING INFORMATION

Name of Company: PHILLIPS PETROLEUM COMPANY

Well Name: UTAH 34-511

Api No. 43-007-30816 LEASE TYPE: STATE

Section 34 Township 13S Range 09E County CARBON

Drilling Contractor PENSE BROTHERS RIG # 9

SPUDDED:

Date 06/11/02

Time 8:00 PM

How DRY

Drilling will commence _____

Reported by FRANKIE HATHAWAY

Telephone # 1-435-613-9777

Date 06/12/2002 Signed: CHD

005

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING

CONFIDENTIAL

SUNDRY NOTICES AND REPORTS ON WELLS		5. Lease Designation and Serial Number: ML-48269
Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells. Use APPLICATION FOR PERMIT TO DRILL OR DEEPEN form for such proposals.		6. If Indian, Allottee or Tribe Name: N/A
1. Type of Well: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER:		7. Unit Agreement Name: Drunkards Wash UTU-67921X
2. Name of Operator: Phillips Petroleum Company		8. Well Name and Number: Utah 34-511
3. Address and Telephone Number: 6825 S. 5300 W. P.O. Box 851 Price, Utah 84501 (435) 613-9777		9. API Well Number: 43-007-30816
4. Location of Well Footages: 2238' FNL, 1789' FWL QQ, Sec., T., R., M.: SE/4, NW/4, Section 34, T13S, R09E, SLB&M		10. Field or Pool, or Wildcat: Drunkards Wash
		County: Carbon County State: Utah

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

NOTICE OF INTENT (Submit in Duplicate)	SUBSEQUENT REPORT (Submit Original Form Only)
<input type="checkbox"/> Abandon <input type="checkbox"/> Repair Casing <input type="checkbox"/> Change of Plans <input type="checkbox"/> Convert to Injection <input type="checkbox"/> Fracture Treat or Acidize <input type="checkbox"/> Multiple Completion <input type="checkbox"/> Other _____ Approximate date work will start _____	<input type="checkbox"/> Abandon * <input type="checkbox"/> Repair Casing <input type="checkbox"/> Change of Plans <input type="checkbox"/> Convert to Injection <input type="checkbox"/> Fracture Treat or Acidize <input checked="" type="checkbox"/> Other <u>Spud Notice</u> Date of work completion _____
<input type="checkbox"/> New Construction <input type="checkbox"/> Pull or Alter Casing <input type="checkbox"/> Recomplete <input type="checkbox"/> Reperforate <input type="checkbox"/> Vent or Flare <input type="checkbox"/> Water Shut-Off	<input type="checkbox"/> New Construction <input type="checkbox"/> Pull or Alter Casing <input type="checkbox"/> Reperforate <input type="checkbox"/> Vent or Flare <input type="checkbox"/> Water Shut-Off

Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION REPORT AND LOG form.
* Must be accompanied by a cement verification report.

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Please be advised that the Utah 34-511 well was spud on 6/11/02 at 8:20 pm
Pense bros. Rig #9
Dry drill

ORIGINAL

RECEIVED

JUN 19 2002

DIVISION OF
OIL, GAS AND MINING

CONFIDENTIAL

13. Name & Signature: Frankie Hathaway *Frankie Hathaway* Title: Administrative Assistant Date: 6/17/02

(This space for state use only)

CONFIDENTIAL

FORM 9

STATE OF UTAH

DIVISION OF OIL, GAS AND MINING

006

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells. Use APPLICATION FOR PERMIT TO DRILL OR DEEPEN form for such proposals.

1. Type of Well: OIL GAS OTHER:

2. Name of Operator:

Phillips Petroleum Company

3. Address and Telephone Number:

6825 S. 5300 W. P.O. Box 851 Price, Utah 84501 (435) 613-9777

4. Location of Well Footages:

2238' FNL, 1789' FWL

QQ, Sec., T., R., M.:

SE/4 NW/4, Section 34, T13S, R09E, SLB&M

5. Lease Designation and Serial Number: ML-48269

6. If Indian, Allottee or Tribe Name: N/A

7. Unit Agreement Name: N/A

8. Well Name and Number: Utah 34-511

9. API Well Number: 43-007-30820 30816

10. Field or Pool, or Wildcat: Undesignated

County: Carbon County State: Utah

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

NOTICE OF INTENT (Submit in Duplicate)

- Abandon, Repair Casing, Change of Plans, Convert to Injection, Fracture Treat or Acidize, Multiple Completion, Other, New Construction, Pull or Alter Casing, Recomplete, Reperforate, Vent or Flare, Water Shut-Off

Approximate date work will start

SUBSEQUENT REPORT (Submit Original Form Only)

- Abandon *, Repair Casing, Change of Plans, Convert to Injection, Fracture Treat or Acidize, Other Well Report, New Construction, Pull or Alter Casing, Reperforate, Vent or Flare, Water Shut-Off

Date of work completion

Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION REPORT AND LOG form.

* Must be accompanied by a cement verification report.

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

See Attached:

ORIGINAL

CONFIDENTIAL

13.

Name & Signature: Frankie Hathaway

[Handwritten Signature]

Title: Administrative Assistant

Date: 6/17/02

(This space for state use only)

RECEIVED

JUN 19 2002

DIVISION OF OIL, GAS AND MINING

DRUNKARDS WASH PROJECT DAILY WELL REPORT

CONFIDENTIAL

UTAH

34-511

API NO: 43-007-30816

2238' FNL, 1789' FWL

SE NW SEC: 34 TWN 13S RNG: 09E

SPUD TIME/DATE: 6/11/2002 8:20:00 PM

COUNTY: Carbon

TD TIME/DATE: 6/14/2002 7:30:00 PM

ELEVATION: 6047

TD DEPTH: 3510

DRILLING CONTRACTOR: Pense Brothers Rig #9

ON-LINE TIME/DATE:

Bit Information

Type	Size	In	Out	Hours	Rotating Hours
Air Hammer	15 in	0.00	15.00	1	0.5
Air Hammer	11 in	15.00	370.00	3.25	3
Air Hammer	7 7/8	370.00	2810.00	28	18
Tri-cone	7 7/8"				

Conductor Casing

Bore Hole Size: 15 in Conductor From: 0.00 To: 15.00

Casing Description: 12 3/4 in PE Number of Joints: 1 Set @: 15.00

Cement: Amount:

Cement Report:

Surface Casing

Bore Hole Size: 11 in Surface Casing From: 15.00 To: 370.00

Casing Description: 8 5/8 in 24#/ft J-55 Number of Joints: 12 Set @: 357.90

Cement: G + 2% S-1 + 1/4#/sk D-29 Amount: 175.00

Cement Report: r/up cementers, safety meeting, test lines, pump 30 bbls of 2% kcl ahead, mix & pump cement, displace w/ 20 bbls of 2% kcl, close valve @ 3:40am 6/12/02, 15 bbls good cement to surface,

Production Casing

Bore Hole Size: 7 7/8 in Prod. Casing From: 0.00 To: 3482.00

Casing Description: 5 1/2 in 17#/ft N-80 Number of Joints: 81 Length: 3482.00

Lead Cement 50/50 POZ, 8%D20, 10%D44, 2%S001, 1/4#/sk Amount: 150.00

Tail Cement: 10-1 RFC Amount: 90.00

Cement Report: RU cementers. Test lines to 3000 psi. Pump 110 bbl 2% KCl water sweep. Pump 150 sx lead (52.6 bbl) @ 12.5 ppg. Pump 90 sx tail (25.6 bbl) @ 14.2 ppg. Displace w/ 81 bbl. Bump plug to 1690 psi. Fluid circulated to pit from 87 bbl of sweep throughout job. Some gas cut fluid flowed to pit.

Float Equipment: 5 1/2" float shoe

Centralizers ran on: jts 2, 5, 9, 14, 21

UTAH 34-511

RECEIVED

JUN 19 2002

DIVISION OF
OIL, GAS AND MINING

Page 1 of 3

Drilling Data

DAY 1 6/12/2002

CURRENT DEPTH 370 CURRENT OPERATIONS: woc ROTATING HRS: 3.50

7am-5pm no activity,
5pm-7pm move on location,
7pm-8:20pm r/up & service equipment,
8:20pm-9:30pm spud @ 8:20pm 6/11/02, drill & set 15ft of conductor,
9:30pm-10pm n/up to drill 11in hole,
10pm-1am drill 370ft of hole,
1am-1:30am clean hole, pooh,
1:30am-2:40am rih w/ 8 5/8in guide shoe + 12 jts of 8 5/8in csg, land @ 357.9ft,
2:40am-3:am r/up cementers,
3am-3:40am cement surface pipe, close valve @ 3:40am 6/12/02, 15 bbls good cement to surface,
3:40am-7am woc,

Estimated Daily Cost: [REDACTED]

DAY 2 6/13/2002

CURRENT DEPTH 2000 CURRENT OPERATIONS: s/down f/ safety meeting ROTATING HRS: 12.0

7am-8:30am woc,
8:30am-11:30am break loose, n/up bope & manifold,
11:30am-12:30pm test bope,
12:30pm-1:30pm n/up f/ 7 7/8in hole,
1:30pm-7pm drill 7 7/8in hole to 1200ft,
7pm-12am drill 1200-2000ft,
12am-1am clean hole,
1am-3am pooh, & secure well,
3am-7am s/down f/ safety meeeting,

Estimated Daily Cost: [REDACTED]

DAY 3 6/14/2002

CURRENT DEPTH 2810 CURRENT OPERATIONS: TIH w/ 7 7/8" tri-cone ROTATING HRS: 0.00

07:00 - 15:30 Safety stand down and meeting in town.
15:30 - 20:15 Trouble Time. Repair rig air compressor.
20:15 - 02:10 Air hammer 7 7/8" hole from 2000' to 2810'. 22:00 - 2090', 23:00 - 2270', 00:00 - 2450', 01:00 - 2600', 02:00 - 2780'
02:10 - 05:00 TOO H w/ 7 7/8" air hammer
05:00 - 06:00 LDDC, change over to 7 7/8" tricone bit, TIH w/ DC
06:00 - 07:00 TIH w/ 7 7/8" tricone bit.

Estimated Daily Cost: [REDACTED]

DAY 4 6/15/2002

CURRENT DEPTH 3500 CURRENT OPERATIONS: WO casing rig. ROTATING HRS: 0.00

07:00 - 08:00 TIH w/ 7 7/8" bit.
08:00 - 09:30 Injecting water
09:30 - 19:30 Drill to TD @ 3510': 10:00 - 2880', 11:00 - 2940', 12:00 - 3000', 13:00 - 3090', 14:00 - 3150',
15:00 - 3210', 16:00 - 3270', 17:00 - 3330', 18:00 - 3390', 19:00 - 3450'.
19:30 - 20:30 Clean hole and load w/ 2% KCl water.
20:30 - 00:30 TOO H w/ drill pipe, LD drill collars & break out bit.
00:30 - 03:45 RU loggers, run open hole logs, RD loggers. Log TD 3515', coal top @3062', fluid level 700'.
03:45 - 07:00 RDMO Pense rig #9

Estimated Daily Cost: [REDACTED]

RECEIVED

JUN 19 2002

DIVISION OF
OIL, GAS AND MINING

DAY 5 6/16/2002

CURRENT DEPTH 3481 CURRENT OPERATIONS: SDON

ROTATING HRS: 0.00

16:30 - 17:30 MIRU Ross rig #11

17:30 - 21:00 RU 5 1/2" tools. Run 81 jts (3,481.95') 5 1/2" 17# N-80 casing.

21:00 - 22:30 TT WO cementers.

22:30 - 01:15 RU cementers, test lines, pump cement job, RD wash up cementers.

Estimated Daily Cost:

Cum. Estimated Daily Cost:

[REDACTED]

CONFIDENTIAL

Frac Data

Completion Data

RECEIVED

JUN 19 2002

DIVISION OF
OIL, GAS AND MINING

007

OPERATOR Phillips Petroleum Company
ADDRESS 6825 S. 5300 W. P.O. Box 851
Price, UT 84501

OPERATOR ACCT. NO.

1475

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION			COUNTY	SPUD DATE	EFFECTIVE DATE	
					OO	SC	TP				RG
B	99999	11256	43-007-30840	Utah M3	SWNW	18	1SS	09E	Carbon	6/15/02	6-20-02

WELL 1 COMMENTS:

New single well, spud inside PA and inside of Unit boundary

CONFIDENTIAL

A	99999	13516	43-007-30816	Utah 34-511	SENNW	34	13S	09E	Carbon	6/11/02	6-20-02
---	-------	-------	--------------	-------------	-------	----	-----	-----	--------	---------	---------

WELL 2 COMMENTS:

New single well, spud outside the PA but inside of Unit boundary

CONFIDENTIAL

--	--	--	--	--	--	--	--	--	--	--	--

WELL 3 COMMENTS:

--	--	--	--	--	--	--	--	--	--	--	--

WELL 4 COMMENTS:

--	--	--	--	--	--	--	--	--	--	--	--

WELL 5 COMMENTS:

--	--	--	--	--	--	--	--	--	--	--	--

<p>WELL 5 COMMENTS:</p> <p style="text-align: center; font-size: 2em; font-weight: bold;">ORIGINAL</p>											
--	--	--	--	--	--	--	--	--	--	--	--

ACTION CODES (See Instructions on back of form)

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

RECEIVED

JUN 20 2002

DIVISION OF
OIL, GAS AND MINING

Signature Frankie Hathaway
Frankie Hathaway

Title Administrative Assistant Date 6/17/02

DIVISION OF OIL, GAS AND MINING

008

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells.
Use APPLICATION FOR PERMIT TO DRILL OR DEEPEN form for such proposals.

1. Type of Well: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER:	5. Lease Designation and Serial Number: ML-48269
2. Name of Operator: Phillips Petroleum Company	6. If Indian, Allottee or Tribe Name: N/A
3. Address and Telephone Number: 6825 S. 5300 W. P.O. Box 851 Price, Utah 84501 (435) 613-9777	7. Unit Agreement Name: Drunkards Wash UTU-67921X
4. Location of Well Footages: 2238' FNL, 1789' FWL QQ, Sec., T., R., M.: SE/4 NW/4 SEC.34, T13S, R09E, SLB & M	8. Well Name and Number: Utah 34-511
	9. API Well Number: 43-007-30816
	10. Field or Pool, or Wildcat: Drunkards Wash
	County: Carbon County State: Utah

11. **CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

NOTICE OF INTENT (Submit in Duplicate)	SUBSEQUENT REPORT (Submit Original Form Only)
<input type="checkbox"/> Abandon <input type="checkbox"/> Repair Casing <input type="checkbox"/> Change of Plans <input type="checkbox"/> Convert to Injection <input type="checkbox"/> Fracture Treat or Acidize <input type="checkbox"/> Multiple Completion <input type="checkbox"/> Other _____ Approximate date work will start _____	<input type="checkbox"/> Abandon * <input type="checkbox"/> Repair Casing <input type="checkbox"/> Change of Plans <input type="checkbox"/> Convert to Injection <input type="checkbox"/> Fracture Treat or Acidize <input checked="" type="checkbox"/> Other <u>1st Production Notification</u> Date of work completion _____
<input type="checkbox"/> New Construction <input type="checkbox"/> Pull or Alter Casing <input type="checkbox"/> Recomplete <input type="checkbox"/> Reperforate <input type="checkbox"/> Vent or Flare <input type="checkbox"/> Water Shut-Off	<input type="checkbox"/> New Construction <input type="checkbox"/> Pull or Alter Casing <input type="checkbox"/> Reperforate <input type="checkbox"/> Vent or Flare <input type="checkbox"/> Water Shut-Off

Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION REPORT AND LOG form.
* Must be accompanied by a cement verification report.

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Please be advised that the Utah 34-511 showed first production on: 8/1/02
 Gas production: 19 mcf
 Water production: 70 bbl

ORIGINAL
 CONFIDENTIAL

RECEIVED
 AUG 12 2002
 DIVISION OF
 OIL, GAS AND MINING

13. Name & Signature: Frankie Hathaway *Frankie Hathaway* Title: Operations Clerk Date: 8/8/02

(This space for state use only)

009

5. LEASE DESIGNATION AND SERIAL NO.

48629
ML-48269

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

N/A

7. UNIT AGREEMENT NAME

Drunkards Wash UTU-67921X

8. FARM OR LEASE NAME

Utah

9. WELL NO.

34-511

10. FIELD AND POOL, OR WILDCAT

Drunkards Wash

11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA

SE/NW Sec. 34, T13S, R09E, SLB&M

12. COUNTY

Carbon

13. STATE

Utah

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. TYPE OF WELL: OIL WELL GAS WELL DRY

b. TYPE OF COMPLETION: NEW WELL WORK OVER DEEP-EN PLUG BACK DIFF. RESVR.

CONFIDENTIAL
PERIOD
EXPIRED
ON 9-3-04

2. NAME OF OPERATOR

Phillips

3. ADDRESS OF OPERATOR

6825 S. 5300 W. P.O. Box 851 Price, Utah 84501 (435) 613-9777

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)

At surface

2238' FNL, 1789' FWL

At top prod. interval reported below

At total depth

14. API NO.
43-007-30816

DATE ISSUED
2/19/02

15. DATE SPUDDED
6/11/02

16. DATE T.D. REACHED
6/14/02

17. DATE COMPL. (Ready to plug or Abdl.)
8/1/02

18. ELEVATIONS (DF, REB, RT, GR, ETC.)
6047'

19. ELEV. CASINGHEAD
N/A

20. TOTAL DEPTH, MD & TVD
3510'

21. PLUG BACK T.D., MD & TVD
3482'

22. IF MULTIPLE COMPL., HOW MANY
N/A

23. INTERVALS DRILLED BY

ROTARY TOOLS
to TD

CABLE TOOLS
N/A

24. PRODUCING INTERVAL(S), OF THIS COMPLETION--TOP, BOTTOM, NAME (MD OR TVD)

Ferron Coal - Top Coal 3058' & Bottom Coal 3203'

25. WAS DIRECTIONAL SURVEY MADE

26. TYPE ELECTRIC AND OTHER LOGS RUN

CBL, GR, CCL - 7-19-02

27. WAS WELL CORED YES NO
DRILL STEM TEST YES NO

(Submit analysis)
(See reverse side)

Dual Induction, Laterolog, SFF, Caliper, Comp Density & Neutron - 6-25-02

28. CASING RECORD (Report all strings set in well)

CASING SIZE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	CEMENT RECORD	AMOUNT PULLED
12 3/4"	Conductor	15'	15"		
8 5/8"	355 24#	358'	11"	175 sks Class G, 2%, 4% Gell & 1/4#/sk Flocel	
5 1/2"	N80 17#	3482'	7 7/8"	150 sks 50/50 POZ, 8% D-20, 10% D-44, 2% S-1	
				90 sks 10-1 RFC (Thixotropic)	

29. LINER RECORD				30. TUBING RECORD			
SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET
					2-7/8"	3309'	N/A

31. PERFORATION RECORD (Interval, size and number)		32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.	
Ferron Coal		DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
3058'-3060', 3062'-3066', 3068'-3070', 3072'-3078', 3080'-3083', 3092'-3094', 3121'-3123', 3200'-3203'		Upper 3058'-3203'	20,407#, 20/40; 184,300#, 16/30; 84,683 gal fluid
6spf .48"			

33. PRODUCTION

DATE FIRST PRODUCTION 8/1/02		PRODUCTION METHOD (Flowing, gas lift, pumping--size and type of pump) Pumping - 2 1/2" x 2" x 16' RWAC				WELL STATUS (Producing or shut-in) Producing	
DATE OF TEST 8/1/02	HOURS TESTED 24hrs.	CHOKE SIZE -----	PROD'N. FOR TEST PERIOD -----	OIL---BBL. N/A	GAS---MCF. 39	WATER---BBL. 70	GAS-OIL RATIO
FLOW. TUBING PRESS. 37	CASING PRESSURE 6	CALCULATED 24-HOUR RATE -----	OIL---BBL. N/A	GAS---MCF. 39	WATER---BBL. 70	OIL---WATER RATIO (GOR) N/A	

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)
SOLD

TEST WITNESSED BY
Kevin Snow

35. LIST OF ATTACHMENTS

36 I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED Kevin Snow *Kevin E. Snow* TITLE Operations Superintendent

RECEIVED
CONFIDENTIAL
SEP 10 2002
DATE 9/4/02

WELL NUMBER: Utah 34-511

37 SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof, cored intervals; and all drill-stem, tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries):		38. GEOLOGIC MARKERS		
FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	
			NAME	
			TOP MEAS. DEPTH	
			TRUE VERT. DEPTH	
Ferron	3057'	3202'	Blue Gate Bentonite	2852'
			Tununk Shale	3342'
			Ferron Sandston	3020'
			Coals and Sandstones	
			Coal Interval: 3057'-3202'	

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING

ORIGINAL

010

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells.
Use APPLICATION FOR PERMIT TO DRILL OR DEEPEN form for such proposals.

1. Type of Well: OIL GAS OTHER: **CONFIDENTIAL**

2. Name of Operator: Phillips Petroleum Company

3. Address and Telephone Number: 6825 South 5300 West, P.O. Box 851, Price, UT 84501 (435) 613-9777

4. Location of Well Footages: 2238' FNL, 1789' FWL
 QQ, Sec., T., R., M.: SE/NW, SEC. 34, T13S, R09E, SLB & M

5. Lease Designation and Serial Number: ML-48269

6. If Indian, Allottee or Tribe Name: N/A

7. Unit Agreement Name: UTU67921X Drunkards Wash

8. Well Name and Number: UTAH 34-511

9. API Well Number: 43-007-30816

10. Field or Pool, or Wildcat: Drunkards Wash

County: Carbon County
 State: Utah

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

NOTICE OF INTENT
(Submit in Duplicate)

- | | |
|--|--|
| <input type="checkbox"/> Abandon | <input type="checkbox"/> New Construction |
| <input type="checkbox"/> Repair Casing | <input type="checkbox"/> Pull or Alter Csg |
| <input type="checkbox"/> Change of Plans | <input type="checkbox"/> Recomplete |
| <input type="checkbox"/> Convert to Injection | <input type="checkbox"/> Reperforate |
| <input type="checkbox"/> Fracture Treat or Acidize | <input type="checkbox"/> Vent or Flare |
| <input type="checkbox"/> Multiple Completion | <input type="checkbox"/> Water Shut-Off |
| <input type="checkbox"/> Other _____ | |
- Approximate date work will start _____

SUBSEQUENT REPORT
(Submit Original Form Only)

- | | |
|---|--|
| <input type="checkbox"/> Abandon * | <input type="checkbox"/> New Construction |
| <input type="checkbox"/> Repair Casing | <input type="checkbox"/> Pull or Alter Csg |
| <input type="checkbox"/> Change of Plans | <input type="checkbox"/> Reperforate |
| <input type="checkbox"/> Convert to Injection | <input type="checkbox"/> Vent or Flare |
| <input type="checkbox"/> Fracture Treat or Acidize | <input type="checkbox"/> Water Shut-Off |
| <input checked="" type="checkbox"/> Other <u>Chemical/Flush Treatment</u> | |
- Date of work completion 09/18/2002

Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION REPORT AND LOG form.

* Must be accompanied by a cement verification report.

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Please be advised that the above referenced well was chemically treated with 4000 gallons of CBMA fluid on 09/18/2002.

RECEIVED

NOV 18 2002

DIVISION OF OIL, GAS AND MINING

13. Name & Signature: Lynnette Allred *L. Allred* Title: Operations Clerk—Production Date: 11/06/2002

(This space for state use only)



Re: Notice of Address Change, Merger and Name Change
Address Change effective **December 2, 2002**
Merger and Name Change effective **December 31, 2002**

Divisions of Oil, Gas, and Mining
Attn: Mr. John Baza
1594 West North Temple,
Suite 1210, P. O. Box 145801
Salt Lake City, UT 84114-5801

Gentlemen:

1. Effective December 2, 2002, Phillips Petroleum Company will close its Englewood, Colorado Rocky Mountain Region office. After that time, all correspondence, notices and invoice for Land related matters should be directed to the address(es) noted below. Note that until December 31, 2002, all properties in which Phillips held an interest will continue to be operated by Phillips Petroleum Company, a wholly-owned subsidiary of ConocoPhillips.

2. On December 31, 2002, Phillips Petroleum Company and Conoco Inc. will merge, and the surviving corporation will be renamed "ConocoPhillips Company".

In accordance with the notice provisions of the Operating Agreements and other agreements, if any, between our companies, please adjust your company/organization records, effective for address purposes as of December 2, 2002, and for company name purposes, as of January 1, 2003, to reflect the following information for addressing and delivery of notices, invoicing and payment, and communications with ConocoPhillips Company. This will also apply to Lease Sale notices and other lease-related correspondence and notifications.

U.S. Mail Address:

ConocoPhillips Company
P.O. Box 2197
Houston, Texas 77252
Attn: Chief Landman,
San Juan/Rockies

Physical Address & Overnight Delivery:

ConocoPhillips Company
550 Westlake Park Blvd.
Three Westlake Park
3WL, Room WL 9000
Houston, Texas 77079
Attn: Chief Landman,
San Juan/Rockies

All ballots and official notices/responses sent by facsimile transmission should be sent to the following contact:

Attn: Chief Landman,
San Juan/Rockies

Fax No.: 832-486-2688 or
832-486-2687

Please contact the undersigned immediately if you have any questions. This notice does not apply to royalty inquiries, joint interest billings, or revenue remittances. Please continue to use the same addresses you are currently using for these matters

Sincerely, *William Rainbolt*

RECEIVED

DEC 02 2002

DIVISION OF
OIL, GAS AND MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

		5. LEASE DESIGNATION AND SERIAL NUMBER:
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <u>All</u>		8. WELL NAME and NUMBER: See Attached List
2. NAME OF OPERATOR: Phillips Petroleum Company		9. API NUMBER: See List
3. ADDRESS OF OPERATOR: 980 Plaza Office CITY Bartlesville STATE OK ZIP 74004		10. FIELD AND POOL, OR WILDCAT:
4. LOCATION OF WELL FOOTAGES AT SURFACE: See Attached List		COUNTY:
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		STATE: UTAH


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____ <input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Conoco Inc. was merged into Phillips Petroleum Company, the surviving corporation, on December 31, 2002. In connection with this merger and effective on the same date, the name of the surviving corporation was changed to "ConocoPhillips Company". We are requesting that a new Operator Number be assigned to ConocoPhillips Company.

Please send production reporting forms to Herb Henderson at ConocoPhillips Company, 315 S. Johnstone, 980 Plaza Office, Bartlesville, OK 74004. Herb's phone number is 918-661-4415.

Current Operator
Phillips Petroleum Company

Steve de Albuquerque

New Operator
ConocoPhillips Company

Yolanda Perez

RECEIVED
JAN 08 2003
DIV. OF OIL, GAS & MINING

NAME (PLEASE PRINT) <u>Yolanda Perez</u>	TITLE <u>Sr. Regulatory Analyst</u>
SIGNATURE 	DATE <u>12/30/2002</u>

(This space for State use only)




SECRETARY'S CERTIFICATE

I, the undersigned, Jennifer M. Garcia, Assistant Secretary of ConocoPhillips Company, formerly Phillips Petroleum Company, organized and existing under and by virtue of the laws of the State of Delaware (the "Corporation"), hereby certify that:

1. As Assistant Secretary I am authorized to execute this certificate on behalf of the Corporation.
2. The attached photocopy of the Certificate of Amendment to the Restated Certificate of Incorporation of Phillips Petroleum Company (to be renamed ConocoPhillips Company) is a true and correct copy as filed in the office of the Secretary of State of Delaware on the 12th day of December 2002, with an effective date of January 1, 2003 and such Certificate of Amendment has not been modified, amended, rescinded or revoked and is in full force and effect as of the date hereof.
3. The attached photocopy of the Certificate of Merger of Conoco Inc. with and into ConocoPhillips Company is a true and correct copy as filed in the office of the Secretary of State of Delaware on the 12th day of December 2002, with an effective date of December 31, 2002 and such Certificate of Merger has not been modified, amended, rescinded or revoked and is in full force and effect as of the date hereof.

IN WITNESS WHEREOF, I have hereunto set my hand as Assistant Secretary and affixed the corporate seal of the Corporation this 7th day of January 2003.


 Assistant Secretary
 ConocoPhillips Company

STATE OF TEXAS §
 §
 COUNTY OF HARRIS §


This instrument was acknowledged before me on January 7, 2003, by Jennifer M. Garcia, Assistant Secretary of ConocoPhillips Company, a Delaware corporation, on behalf of said Corporation.



RECEIVED

JAN 08 2003

DIV. OF OIL, GAS & MINING


 Notary Public

Delaware

PAGE 1

The First State


I, HARRIET SMITH WINDSOR, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF AMENDMENT OF "PHILLIPS PETROLEUM COMPANY", CHANGING ITS NAME FROM "PHILLIPS PETROLEUM COMPANY" TO "CONOCOPHILLIPS COMPANY", FILED IN THIS OFFICE ON THE TWELFTH DAY OF DECEMBER, A.D. 2002, AT 1:41 O'CLOCK P.M.

AND I DO HEREBY FURTHER CERTIFY THAT THE EFFECTIVE DATE OF THE AFORESAID CERTIFICATE OF AMENDMENT IS THE THIRTY-FIRST DAY OF DECEMBER, A.D. 2002, AT 11 O'CLOCK P.M.

RECEIVED

JAN 08 2003

DIV. OF OIL, GAS & MINING



Harriet Smith Windsor

Harriet Smith Windsor, Secretary of State

AUTHENTICATION: 2183360

DATE: 01-02-03

0064324 8100

030002793

CERTIFICATE OF AMENDMENT

to the

RESTATED CERTIFICATE OF INCORPORATION

of

**PHILLIPS PETROLEUM COMPANY
(to be renamed ConocoPhillips Company)**

Phillips Petroleum Company ("Phillips"), a corporation organized and existing under the General Corporation Law of the State of Delaware (the "DGCL"), hereby certifies that:

1. The amendments to Phillips' Restated Certificate of Incorporation set forth below were duly adopted in accordance with the provisions of Section 242 of the DGCL and have been consented to in writing by the sole stockholder of Phillips in accordance with Section 228 of the DGCL.

2. Phillips' Restated Certificate of Incorporation is hereby amended by deleting Article I thereof and replacing in lieu thereof a new Article I reading in its entirety as follows:

"The name of the corporation (which is hereinafter referred to as the "Corporation") is ConocoPhillips Company."


3. Phillips' Restated Certificate of Incorporation is hereby amended by deleting Section 1 of Article IV thereof and replacing in lieu thereof a new Section 1 reading in its entirety as follows:

"Section 1. The Corporation shall be authorized to issue 2,100 shares of capital stock, of which 2,100 shares shall be shares of Common Stock, \$.01 par value ("Common Stock")."

4. Pursuant to Section 103(d) of the DGCL, this amendment will become effective at 11:00 p.m., Eastern time, on December 31, 2002.

IN WITNESS WHEREOF, Phillips has caused this certificate to be executed this 12th day of December, 2002.

PHILLIPS PETROLEUM COMPANY

By: 
Name: Rick A. Harrington
Title: Senior Vice President, Legal,
and General Counsel

RECEIVED
JAN 08 2003
DIV. OF OIL, GAS & MINING

Delaware

PAGE 1

The First State

I, HARRIET SMITH WINDSOR, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF MERGER, WHICH MERGES:

"CONOCO INC.", A DELAWARE CORPORATION,


WITH AND INTO "CONOCOPHILLIPS COMPANY" UNDER THE NAME OF "CONOCOPHILLIPS COMPANY", A CORPORATION ORGANIZED AND EXISTING UNDER THE LAWS OF THE STATE OF DELAWARE, AS RECEIVED AND FILED IN THIS OFFICE THE TWELFTH DAY OF DECEMBER, A.D. 2002, AT 1:44 O'CLOCK P.M.

AND I DO HEREBY FURTHER CERTIFY THAT THE EFFECTIVE DATE OF THE AFORESAID CERTIFICATE OF MERGER IS THE THIRTY-FIRST DAY OF DECEMBER, A.D. 2002, AT 11:59 O'CLOCK P.M.

RECEIVED

JAN 08 2003

DIV. OF OIL, GAS & MINING



Harriet Smith Windsor

Harriet Smith Windsor, Secretary of State

AUTHENTICATION: 2183370

0064324 8100M

030002793

DATE: 01-02-03

CERTIFICATE OF MERGER

of

Conoco Inc.
(a Delaware corporation)

with and into

ConocoPhillips Company
(a Delaware corporation)

Phillips Petroleum Company, a Delaware corporation to be renamed ConocoPhillips Company prior to the effective time of this certificate of merger (the "Surviving Corporation"), in compliance with the requirements of the General Corporation Law of the State of Delaware (the "DGCL") and desiring to effect a merger of Conoco Inc., a Delaware corporation formerly incorporated under the name Du Pont Holdings, Inc. (the "Merging Corporation," and together with the Surviving Corporation, the "Constituent Corporations"), with and into the Surviving Corporation, and acting by its duly authorized officer, DOES HEREBY CERTIFY that:

First: As of the date hereof, the name and state of incorporation of each of the Constituent Corporations of the merger are as follows:

<u>NAME</u>	<u>STATE OF INCORPORATION</u>
PHILLIPS PETROLEUM COMPANY	Delaware
CONOCO INC.	Delaware

Second: An agreement and plan of merger has been approved, adopted, certified, executed and acknowledged by each of the Constituent Corporations in accordance with the requirements of Section 251 of the DGCL;

Third: The name of the Surviving Corporation will be ConocoPhillips Company;

Fourth: The Certificate of Incorporation of ConocoPhillips Company immediately prior to the merger shall be the Certificate of Incorporation of the Surviving Corporation until such time as it may be amended in accordance with applicable law and the provisions thereof;

Fifth: The executed agreement and plan of merger is on file at an office of the Surviving Corporation, the address of which is 600 North Dairy Ashford, Houston, Texas 77079;

RECEIVED

JAN 08 2003

DIV. OF OIL, GAS & MINING


Sixth: A copy of the agreement and plan of merger will be furnished by the Surviving Corporation, on request and without cost, to any stockholder of any Constituent Corporation; and

Seventh: Pursuant to Section 103(d) of the DGCL, this certificate of merger will become effective at 11:59 p.m., Eastern time, on December 31, 2002.

Dated: December 12, 2002

PHILLIPS PETROLEUM COMPANY
(a Delaware corporation)

27

By: 
Name: Rick A. Harrington
Title: Senior Vice President, Legal,
and General Counsel

RECEIVED
JAN 08 2003
DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF COMMERCE
REGISTRATION

CONOCOPHILLIPS COMPANY

EFFECTIVE
06/14/1946

EXPIRATION
*RENEWAL

REFERENCE NUMBER(S), CLASSIFICATION(S) & DETAIL(S)

Corporation - Foreign - Profit
562960-0143

UNITED STATES CORP CO
CONOCOPHILLIPS COMPANY
GATEWAY TOWER EAST STE 900
10 EAST SOUTH TEMPLE
SLC UT 84133

RECEIVED

JAN 08 2003

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF COMMERCE
DIVISION OF CORPORATIONS & COMMERCIAL CODE
REGISTRATION

EFFECTIVE DATE: 06/14/1946
EXPIRATION DATE: *RENEWAL
ISSUED TO: CONOCOPHILLIPS COMPANY



REFERENCE NUMBER(S), CLASSIFICATION(S) & DETAIL(S)

562960-0143 Corporation - Foreign - Profit

*RENEWAL

You will need to renew your registration each anniversary date of the effective date.

Exceptions: DBAs and Business Trusts renew every three (3) years from the effective date.

Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twprn	Twprd	Rngn	Rngd
43-007-30887-00-00	ANDREEN 32-529	Gas Well	APD	32	14	S	10	E
43-007-30865-00-00	COTNER 29-549	Gas Well	APD	29	14	S	10	E
43-007-30837-00-00	DALLIN 32-615	Gas Well	APD	32	13	S	9	E
43-047-34551-00-00	FED 43-24-3 #1	Gas Well	APD	24	10	S	17	E
43-047-33982-00-00	FEDERAL 12-17 #1	Gas Well	APD	17	10	S	18	E
43-047-34471-00-00	FEDERAL 12-29-7 1	Gas Well	APD	29	9	S	19	E
43-047-34472-00-00	FEDERAL 31-31-6 1	Gas Well	APD	31	9	S	19	E
43-007-30864-00-00	MCKENDRICK 29-548	Gas Well	APD	29	14	S	10	E
43-015-30512-00-00	PPCO 19-379	Gas Well	APD	19	16	S	9	E
43-015-30515-00-00	PPCO 24-562	Gas Well	APD	24	16	S	8	E
43-015-30548-00-00	PPCO 30-605	Gas Well	APD	30	16	S	9	E
43-007-30888-00-00	PRICE 32-438	Gas Well	APD	32	14	S	10	E
43-007-30813-00-00	RITZAKIS 33-514	Gas Well	APD	33	13	S	9	E
43-007-30766-00-00	RITZAKIS 33-516	Gas Well	APD	33	13	S	9	E
43-007-30838-00-00	ROWLEY 32-616	Gas Well	APD	32	13	S	9	E
43-007-30863-00-00	SCHMIDT 29-531	Gas Well	APD	29	14	S	10	E
43-007-30797-00-00	SEELY 15-498	Gas Well	APD	15	14	S	8	E
43-007-30798-00-00	SEELY 15-499	Gas Well	APD	15	14	S	8	E
43-007-30799-00-00	SEELY 15-500	Gas Well	APD	15	14	S	8	E
43-007-30796-00-00	SEELY 22-492	Gas Well	APD	22	14	S	8	E
43-007-30801-00-00	SEELY 22-502	Gas Well	APD	22	14	S	8	E
43-007-30802-00-00	SEELY 22-503	Gas Well	APD	22	14	S	8	E
43-007-30711-00-00	USA 09-452	Gas Well	APD	9	15	S	8	E
43-015-30351-00-00	USA 11-313	Gas Well	APD	11	16	S	9	E
43-015-30398-00-00	USA 12-385	Gas Well	APD	12	16	S	9	E
43-015-30409-00-00	USA 12-426	Gas Well	APD	12	16	S	9	E
43-007-30805-00-00	USA 14-490	Gas Well	APD	14	14	S	8	E
43-007-30806-00-00	USA 14-491	Gas Well	APD	14	14	S	8	E
43-007-30676-00-00	USA 15-421	Gas Well	APD	15	15	S	8	E
43-015-30417-00-00	USA 21-427	Gas Well	APD	21	16	S	9	E
43-015-30416-00-00	USA 21-428	Gas Well	APD	21	16	S	9	E
43-015-30415-00-00	USA 21-429	Gas Well	APD	21	16	S	9	E
43-007-30515-00-00	USA 31-309	Gas Well	APD	31	15	S	10	E
43-007-30835-00-00	USA 33-515	Gas Well	APD	33	13	S	9	E
43-007-30836-00-00	USA 33-624	Gas Well	APD	33	13	S	9	E
43-007-30803-00-00	USA 34-518	Gas Well	APD	34	14	S	8	E
43-007-30478-00-00	UTAH 05-224	Gas Well	APD	5	15	S	9	E
43-015-30411-00-00	UTAH 16-365	Gas Well	APD	16	16	S	9	E
43-015-30412-00-00	UTAH 16-366	Gas Well	APD	16	16	S	9	E
43-015-30413-00-00	UTAH 16-430	Gas Well	APD	16	16	S	9	E
43-015-30299-00-00	UTAH 18-374	Gas Well	APD	18	16	S	9	E
43-015-30420-00-00	UTAH 19-377	Gas Well	APD	19	16	S	9	E
43-015-30492-00-00	UTAH 19-378	Gas Well	APD	19	16	S	9	E
43-007-30891-00-00	UTAH 19-533	Gas Well	APD	19	14	S	10	E
43-015-30414-00-00	UTAH 20-381	Gas Well	APD	20	16	S	9	E
43-015-30421-00-00	UTAH 20-382	Gas Well	APD	20	16	S	9	E
43-015-30518-00-00	UTAH 25-576	Gas Well	APD	25	16	S	8	E
43-015-30539-00-00	UTAH 25-578	Gas Well	APD	25	16	S	8	E
43-015-30540-00-00	UTAH 25-579	Gas Well	APD	25	16	S	8	E
43-007-30817-00-00	UTAH 25-618	Gas Well	APD	25	13	S	9	E
43-015-30543-00-00	UTAH 26-582	Gas Well	APD	26	16	S	8	E
43-015-30547-00-00	UTAH 29-608	Gas Well	APD	29	16	S	9	E
43-007-30889-00-00	UTAH 32-128	Gas Well	APD	32	14	S	10	E
43-007-30814-00-00	UTAH 35-506	Gas Well	APD	35	13	S	9	E

Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twpn	Twpd	Rngn	Rngd
43-047-33750-00-00	FEDERAL 34-29	Gas Well	P	29	9	S	19	E
43-007-30782-00-00	GAROFOLA 26-482	Gas Well	P	26	15	S	8	E
43-007-30335-00-00	GIACOLETTO 11-113	Gas Well	P	11	14	S	9	E
43-007-30407-00-00	GIACOLETTO 13-120	Gas Well	P	13	14	S	9	E
43-007-30345-00-00	GIACOLETTO 14-121	Gas Well	P	14	14	S	9	E
43-007-30487-00-00	HELPER & ASSOC 07-307	Gas Well	P	7	15	S	9	E
43-007-30459-00-00	HELPER & ASSOC 18-236	Gas Well	P	18	15	S	9	E
43-007-30720-00-00	HELPER & ASSOC 18-308	Gas Well	P	18	15	S	9	E
43-007-30412-00-00	HELPER & ASSOC 8-232	Gas Well	P	8	15	S	9	E
43-007-30258-00-00	HELPER & ASSOCIATES 7-84	Gas Well	P	7	15	S	9	E
43-007-30588-00-00	JENSEN 16-132	Gas Well	P	16	15	S	10	E
43-007-30420-00-00	KAKATSIDES 31-197	Gas Well	P	31	14	S	9	E
43-007-30296-00-00	LDS 17-133	Gas Well	P	17	15	S	10	E
43-007-30323-00-00	PAAR 16-146	Gas Well	P	16	14	S	9	E
43-047-34286-00-00	PETES WASH 23-12 #1	Gas Well	P	12	10	S	17	E
43-007-30748-00-00	PIERUCCI 25-461	Gas Well	P	25	15	S	8	E
43-007-30749-00-00	PIERUCCI 25-462	Gas Well	P	25	15	S	8	E
43-007-30754-00-00	PIERUCCI 26-463	Gas Well	P	26	15	S	8	E
43-007-30755-00-00	PIERUCCI 26-464	Gas Well	P	26	15	S	8	E
43-007-30745-00-00	PIERUCCI 26-481	Gas Well	P	26	15	S	8	E
43-007-30117-00-00	PINNACLE PEAK 19-171	Gas Well	P	19	14	S	9	E
43-007-30845-00-00	PMC 10-526	Gas Well	P	10	15	S	8	E
43-007-30282-00-00	POWELL 19-104	Gas Well	P	19	15	S	10	E
43-007-30283-00-00	POWELL 19-105	Gas Well	P	19	15	S	10	E
43-007-30346-00-00	POWELL 30-173	Gas Well	P	30	15	S	10	E
43-015-30279-00-00	PPCO 10-557	Gas Well	P	10	16	S	8	E
43-015-30494-00-00	PPCO 15-555	Gas Well	P	15	16	S	8	E
43-007-30211-00-00	PRETTYMAN 10-15-34	Gas Well	P	10	14	S	9	E
43-007-30340-00-00	PRETTYMAN 11-114	Gas Well	P	11	14	S	9	E
43-007-30653-00-00	RGC 21-331	Gas Well	P	21	15	S	9	E
43-007-30743-00-00	RGC 21-332	Gas Well	P	21	15	S	9	E
43-007-30747-00-00	RGC 25-460	Gas Well	P	25	15	S	8	E
43-007-30559-00-00	RGC 28-318	Gas Well	P	28	15	S	9	E
43-007-30518-00-00	RGC 28-319	Gas Well	P	28	15	S	9	E
43-007-30509-00-00	RITZAKIS 03-408	Gas Well	P	3	14	S	9	E
43-007-30473-00-00	RITZAKIS 5-304	Gas Well	P	5	14	S	9	E
43-007-30474-00-00	RITZAKIS 5-305	Gas Well	P	5	14	S	9	E
43-007-30475-00-00	RITZAKIS 8-298	Gas Well	P	8	14	S	9	E
43-007-30479-00-00	RITZAKIS 8-299	Gas Well	P	8	14	S	9	E
43-007-30476-00-00	RITZAKIS 8-300	Gas Well	P	8	14	S	9	E
43-007-30374-00-00	ROBERTSON 32-127	Gas Well	P	32	14	S	10	E
43-007-30610-00-00	SAMPINOS 16-131	Gas Well	P	16	15	S	10	E
43-007-30723-00-00	SAMPINOS 16-454	Gas Well	P	16	15	S	10	E
43-007-30765-00-00	SAMPINOS 16-521	Gas Well	P	16	15	S	10	E
43-007-30800-00-00	SEELY 22-501	Gas Well	P	22	14	S	8	E
43-007-30130-00-00	ST OF UT 25-9-1	Gas Well	P	25	14	S	9	E
43-007-30142-00-00	ST OF UT 36-3-4	Gas Well	P	36	14	S	9	E
43-007-30116-00-00	STELLA-HAMAKER 10-174	Gas Well	P	10	15	S	8	E
43-007-30746-00-00	TABOR 23-468	Gas Well	P	23	15	S	8	E
43-007-30319-00-00	TELONIS 15-142	Gas Well	P	15	14	S	9	E
43-007-30322-00-00	TELONIS 16-145	Gas Well	P	16	14	S	9	E
43-007-30300-00-00	TELONIS 19-150	Gas Well	P	19	14	S	9	E
43-007-30299-00-00	TELONIS 19-151	Gas Well	P	19	14	S	9	E
43-007-30327-00-00	TELONIS 20-152	Gas Well	P	20	14	S	9	E

Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twpn	Twpd	Rngn	Rngd
43-007-30631-00-00	USA 13-419	Gas Well	P	13	15	S	8	E
43-007-30707-00-00	USA 13-447	Gas Well	P	13	14	S	8	E
43-007-30706-00-00	USA 13-470	Gas Well	P	13	14	S	8	E
43-007-30789-00-00	USA 13-474	Gas Well	P	13	14	S	8	E
43-007-30790-00-00	USA 13-475	Gas Well	P	13	14	S	8	E
43-007-30568-00-00	USA 13-91	Gas Well	P	13	14	S	9	E
43-007-30404-00-00	USA 14-122	Gas Well	P	14	14	S	9	E
43-015-30418-00-00	USA 1-425	Gas Well	P	1	16	S	9	E
43-007-30579-00-00	USA 14-325	Gas Well	P	14	15	S	8	E
43-007-30634-00-00	USA 14-386	Gas Well	P	14	15	S	8	E
43-007-30646-00-00	USA 14-416	Gas Well	P	14	15	S	8	E
43-007-30647-00-00	USA 14-417	Gas Well	P	14	15	S	8	E
43-007-30791-00-00	USA 14-476	Gas Well	P	14	14	S	8	E
43-007-30792-00-00	USA 14-477	Gas Well	P	14	14	S	8	E
43-007-30529-00-00	USA 14-74	Gas Well	P	14	14	S	9	E
43-007-30263-00-00	USA 14-75	Gas Well	P	14	14	S	9	E
43-007-30450-00-00	USA 15-176	Gas Well	P	15	14	S	9	E
43-007-30423-00-00	USA 15-177	Gas Well	P	15	14	S	9	E
43-007-30690-00-00	USA 15-420	Gas Well	P	15	15	S	8	E
43-007-30691-00-00	USA 15-422	Gas Well	P	15	15	S	8	E
43-007-30264-00-00	USA 15-88	Gas Well	P	15	14	S	9	E
43-007-30422-00-00	USA 17-179	Gas Well	P	17	14	S	9	E
43-007-30622-00-00	USA 17-180A	Gas Well	P	17	14	S	9	E
43-007-30618-00-00	USA 18-181	Gas Well	P	18	14	S	9	E
43-007-30417-00-00	USA 18-182	Gas Well	P	18	14	S	9	E
43-007-30619-00-00	USA 18-435	Gas Well	P	18	14	S	9	E
43-007-30393-00-00	USA 19-222	Gas Well	P	19	15	S	10	E
43-007-30392-00-00	USA 19-73	Gas Well	P	19	15	S	10	E
43-007-30448-00-00	USA 20-287	Gas Well	P	20	15	S	10	E
43-007-30451-00-00	USA 20-288	Gas Well	P	20	15	S	10	E
43-007-30590-00-00	USA 20-398	Gas Well	P	20	15	S	10	E
43-007-30591-00-00	USA 20-399	Gas Well	P	20	15	S	10	E
43-007-30424-00-00	USA 21-184	Gas Well	P	21	14	S	9	E
43-007-30425-00-00	USA 21-35	Gas Well	P	21	14	S	9	E
43-007-30426-00-00	USA 22-185	Gas Well	P	22	14	S	9	E
43-007-30477-00-00	USA 22-186	Gas Well	P	22	14	S	9	E
43-007-30700-00-00	USA 22-466	Gas Well	P	22	15	S	8	E
43-007-30611-00-00	USA 23-423	Gas Well	P	23	14	S	8	E
43-007-30650-00-00	USA 23-445	Gas Well	P	23	15	S	8	E
43-007-30704-00-00	USA 23-451	Gas Well	P	23	15	S	8	E
43-007-30503-00-00	USA 23-467	Gas Well	P	23	15	S	8	E
43-007-30793-00-00	USA 23-478	Gas Well	P	23	14	S	8	E
43-007-30794-00-00	USA 23-479	Gas Well	P	23	14	S	8	E
43-007-30795-00-00	USA 23-480	Gas Well	P	23	14	S	8	E
43-007-30469-00-00	USA 24-183	Gas Well	P	24	14	S	8	E
43-007-30612-00-00	USA 24-387	Gas Well	P	24	14	S	8	E
43-007-30613-00-00	USA 24-388	Gas Well	P	24	14	S	8	E
43-007-30651-00-00	USA 24-443	Gas Well	P	24	15	S	8	E
43-007-30648-00-00	USA 24-444	Gas Well	P	24	15	S	8	E
43-007-30708-00-00	USA 24-446	Gas Well	P	24	14	S	8	E
43-007-30652-00-00	USA 24-448	Gas Well	P	24	15	S	8	E
43-007-30705-00-00	USA 24-449	Gas Well	P	24	15	S	8	E
43-007-30505-00-00	USA 25-459	Gas Well	P	25	15	S	8	E
43-007-30614-00-00	USA 26-393	Gas Well	P	26	14	S	8	E

Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twpn	Twpd	Rngn	Rngd
43-007-30430-00-00	UTAH 06-223	Gas Well	P	6	15	S	9	E
43-007-30562-00-00	UTAH 06-330	Gas Well	P	6	15	S	9	E
43-007-30716-00-00	UTAH 06-483	Gas Well	P	6	15	S	9	E
43-007-30409-00-00	UTAH 07-234	Gas Well	P	7	15	S	9	E
43-007-30421-00-00	UTAH 07-235	Gas Well	P	7	15	S	9	E
43-007-30411-00-00	UTAH 08-231	Gas Well	P	8	15	S	9	E
43-007-30488-00-00	UTAH 08-233	Gas Well	P	8	15	S	9	E
43-015-30464-00-00	UTAH 08-354	Gas Well	P	8	16	S	9	E
43-015-30378-00-00	UTAH 08-355	Gas Well	P	8	16	S	9	E
43-015-30379-00-00	UTAH 08-356	Gas Well	P	8	16	S	9	E
43-015-30380-00-00	UTAH 08-357	Gas Well	P	8	16	S	9	E
43-007-30449-00-00	UTAH 09-227	Gas Well	P	9	15	S	9	E
43-007-30561-00-00	UTAH 09-329	Gas Well	P	9	15	S	9	E
43-015-30300-00-00	UTAH 09-358	Gas Well	P	9	16	S	9	E
43-015-30407-00-00	UTAH 09-359	Gas Well	P	9	16	S	9	E
43-015-30397-00-00	UTAH 09-360	Gas Well	P	9	16	S	9	E
43-015-30408-00-00	UTAH 09-361	Gas Well	P	9	16	S	9	E
43-007-30580-00-00	UTAH 09-412	Gas Well	P	9	15	S	10	E
43-007-30605-00-00	UTAH 09-413	Gas Well	P	9	15	S	10	E
43-007-30657-00-00	UTAH 09-450	Gas Well	P	9	15	S	10	E
43-007-30722-00-00	UTAH 09-453	Gas Well	P	9	15	S	10	E
43-007-30302-00-00	UTAH 10-01-36	Gas Well	P	10	15	S	9	E
43-007-30298-00-00	UTAH 10-219	Gas Well	P	10	15	S	9	E
43-007-30432-00-00	UTAH 10-220	Gas Well	P	10	15	S	9	E
43-007-30303-00-00	UTAH 10-221	Gas Well	P	10	15	S	9	E
43-007-30228-00-00	UTAH 11-50	Gas Well	P	11	15	S	9	E
43-007-30229-00-00	UTAH 11-51	Gas Well	P	11	15	S	9	E
43-007-30230-00-00	UTAH 11-52	Gas Well	P	11	15	S	9	E
43-007-30231-00-00	UTAH 11-53	Gas Well	P	11	15	S	9	E
43-007-30467-00-00	UTAH 1-209	Gas Well	P	1	15	S	8	E
43-007-30210-00-00	UTAH 12-15-37	Gas Well	P	12	15	S	9	E
43-007-30232-00-00	UTAH 12-54	Gas Well	P	12	15	S	9	E
43-007-30233-00-00	UTAH 12-55	Gas Well	P	12	15	S	9	E
43-007-30234-00-00	UTAH 12-56	Gas Well	P	12	15	S	9	E
43-015-30493-00-00	UTAH 13-376	Gas Well	P	13	16	S	8	E
43-015-30301-00-00	UTAH 13-550	Gas Well	P	13	16	S	8	E
43-007-30243-00-00	UTAH 13-65	Gas Well	P	13	15	S	9	E
43-007-30244-00-00	UTAH 13-66	Gas Well	P	13	15	S	9	E
43-007-30245-00-00	UTAH 13-67	Gas Well	P	13	15	S	9	E
43-007-30246-00-00	UTAH 13-68	Gas Well	P	13	15	S	9	E
43-007-30439-00-00	UTAH 13-92	Gas Well	P	13	14	S	9	E
43-007-30220-00-00	UTAH 1-42	Gas Well	P	1	15	S	9	E
43-007-30221-00-00	UTAH 1-43	Gas Well	P	1	15	S	9	E
43-007-30222-00-00	UTAH 1-44	Gas Well	P	1	15	S	9	E
43-007-30223-00-00	UTAH 1-45	Gas Well	P	1	15	S	9	E
43-015-30330-00-00	UTAH 14-551	Gas Well	P	14	16	S	8	E
43-015-30331-00-00	UTAH 14-552	Gas Well	P	14	16	S	8	E
43-007-30239-00-00	UTAH 14-61	Gas Well	P	14	15	S	9	E
43-007-30240-00-00	UTAH 14-62	Gas Well	P	14	15	S	9	E
43-007-30241-00-00	UTAH 14-63	Gas Well	P	14	15	S	9	E
43-007-30242-00-00	UTAH 14-64	Gas Well	P	14	15	S	9	E
43-015-30334-00-00	UTAH 15-553	Gas Well	P	15	16	S	8	E
43-007-30416-00-00	UTAH 17-101	Gas Well	P	17	15	S	10	E
43-007-30277-00-00	UTAH 17-102	Gas Well	P	17	15	S	10	E

Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twpn	Twpd	Rngn	Rngd
43-007-30255-00-00	UTAH 24-80	Gas Well	P	24	15	S	9	E
43-007-30256-00-00	UTAH 24-81	Gas Well	P	24	15	S	9	E
43-007-30267-00-00	UTAH 24-86	Gas Well	P	24	15	S	9	E
43-007-30375-00-00	UTAH 24-87	Gas Well	P	24	15	S	9	E
43-007-30227-00-00	UTAH 2-49	Gas Well	P	2	15	S	9	E
43-007-30157-00-00	UTAH 25-11-7	Gas Well	P	25	14	S	9	E
43-007-30399-00-00	UTAH 25-134	Gas Well	P	25	15	S	9	E
43-007-30400-00-00	UTAH 25-252	Gas Well	P	25	15	S	9	E
43-007-30401-00-00	UTAH 25-253	Gas Well	P	25	15	S	9	E
43-007-30402-00-00	UTAH 25-254	Gas Well	P	25	15	S	9	E
43-007-30600-00-00	UTAH 25-389	Gas Well	P	25	14	S	8	E
43-007-30599-00-00	UTAH 25-390	Gas Well	P	25	14	S	8	E
43-007-30658-00-00	UTAH 25-391	Gas Well	P	25	14	S	8	E
43-007-30602-00-00	UTAH 25-392	Gas Well	P	25	14	S	8	E
43-007-30206-00-00	UTAH 25-4-33	Gas Well	P	25	14	S	9	E
43-015-30519-00-00	UTAH 25-577	Gas Well	P	25	16	S	8	E
43-007-30156-00-00	UTAH 25-7-6	Gas Well	P	25	14	S	9	E
43-007-30204-00-00	UTAH 26-11-25	Gas Well	P	26	14	S	9	E
43-007-30205-00-00	UTAH 26-1-23	Gas Well	P	26	14	S	9	E
43-007-30181-00-00	UTAH 26-16-8	Gas Well	P	26	14	S	9	E
43-007-30446-00-00	UTAH 26-255	Gas Well	P	26	15	S	9	E
43-007-30445-00-00	UTAH 26-256	Gas Well	P	26	15	S	9	E
43-007-30444-00-00	UTAH 26-257	Gas Well	P	26	15	S	9	E
43-007-30514-00-00	UTAH 26-267	Gas Well	P	26	15	S	9	E
43-015-30541-00-00	UTAH 26-580	Gas Well	P	26	16	S	8	E
43-015-30542-00-00	UTAH 26-581	Gas Well	P	26	16	S	8	E
43-015-30544-00-00	UTAH 26-583	Gas Well	P	26	16	S	8	E
43-007-30202-00-00	UTAH 26-6-24	Gas Well	P	26	14	S	9	E
43-007-30395-00-00	UTAH 27-187	Gas Well	P	27	14	S	9	E
43-007-30292-00-00	UTAH 27-188	Gas Well	P	27	14	S	9	E
43-007-30457-00-00	UTAH 27-268	Gas Well	P	27	15	S	9	E
43-007-30458-00-00	UTAH 27-269	Gas Well	P	27	15	S	9	E
43-007-30712-00-00	UTAH 27-457	Gas Well	P	27	14	S	8	E
43-007-30714-00-00	UTAH 27-458	Gas Well	P	27	14	S	8	E
43-007-30777-00-00	UTAH 27-520	Gas Well	P	27	14	S	8	E
43-015-30545-00-00	UTAH 27-584	Gas Well	P	27	16	S	8	E
43-007-30193-00-00	UTAH 27-8-29	Gas Well	P	27	14	S	9	E
43-007-30186-00-00	UTAH 27-9-30	Gas Well	P	27	14	S	9	E
43-007-30396-00-00	UTAH 28-189	Gas Well	P	28	14	S	9	E
43-007-30397-00-00	UTAH 28-190	Gas Well	P	28	14	S	9	E
43-007-30293-00-00	UTAH 28-191	Gas Well	P	28	14	S	9	E
43-007-30294-00-00	UTAH 28-192	Gas Well	P	28	14	S	9	E
43-007-30551-00-00	UTAH 28-320	Gas Well	P	28	15	S	9	E
43-007-30560-00-00	UTAH 28-321	Gas Well	P	28	15	S	9	E
43-007-30405-00-00	UTAH 29-193	Gas Well	P	29	14	S	9	E
43-007-30427-00-00	UTAH 29-194	Gas Well	P	29	14	S	9	E
43-007-30739-00-00	UTAH 29-339	Gas Well	P	29	15	S	9	E
43-007-30740-00-00	UTAH 29-340	Gas Well	P	29	15	S	9	E
43-007-30741-00-00	UTAH 29-341	Gas Well	P	29	15	S	9	E
43-007-30742-00-00	UTAH 29-342	Gas Well	P	29	15	S	9	E
43-007-30262-00-00	UTAH 30-125	Gas Well	P	30	14	S	10	E
43-007-30185-00-00	UTAH 30-13-14	Gas Well	P	30	14	S	10	E
43-007-30265-00-00	UTAH 30-195	Gas Well	P	30	14	S	9	E
43-007-30344-00-00	UTAH 30-196	Gas Well	P	30	14	S	9	E

Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twpr	Twpd	Rngn	Rngd
43-007-30178-00-00	UTAH 36-1-2	Gas Well	P	36	14	S	9	E
43-007-30341-00-00	UTAH 36-135	Gas Well	P	36	15	S	9	E
43-007-30343-00-00	UTAH 36-136	Gas Well	P	36	15	S	9	E
43-007-30342-00-00	UTAH 36-137	Gas Well	P	36	15	S	9	E
43-007-30315-00-00	UTAH 36-162	Gas Well	P	36	14	S	8	E
43-007-30316-00-00	UTAH 36-163	Gas Well	P	36	14	S	8	E
43-007-30317-00-00	UTAH 36-164	Gas Well	P	36	14	S	8	E
43-007-30318-00-00	UTAH 36-165	Gas Well	P	36	14	S	8	E
43-007-30144-00-00	UTAH 36-9-5	Gas Well	P	36	14	S	9	E
43-015-30341-00-00	UTAH 4-280	Gas Well	P	4	16	S	9	E
43-015-30342-00-00	UTAH 4-282	Gas Well	P	4	16	S	9	E
43-007-30384-00-00	UTAH 5-205	Gas Well	P	5	15	S	9	E
43-007-30269-00-00	UTAH 5-94	Gas Well	P	5	15	S	10	E
43-007-30270-00-00	UTAH 5-95	Gas Well	P	5	15	S	10	E
43-007-30271-00-00	UTAH 5-96	Gas Well	P	5	15	S	10	E
43-007-30217-00-00	UTAH 6-38	Gas Well	P	6	15	S	10	E
43-007-30218-00-00	UTAH 6-39	Gas Well	P	6	15	S	10	E
43-007-30219-00-00	UTAH 6-40	Gas Well	P	6	15	S	10	E
43-007-30254-00-00	UTAH 6-41	Gas Well	P	6	15	S	10	E
43-007-30235-00-00	UTAH 7-57	Gas Well	P	7	15	S	10	E
43-007-30236-00-00	UTAH 7-58	Gas Well	P	7	15	S	10	E
43-007-30237-00-00	UTAH 7-59	Gas Well	P	7	15	S	10	E
43-007-30238-00-00	UTAH 7-60	Gas Well	P	7	15	S	10	E
43-007-30275-00-00	UTAH 8-100	Gas Well	P	8	15	S	10	E
43-007-30410-00-00	UTAH 8-230	Gas Well	P	8	15	S	9	E
43-007-30272-00-00	UTAH 8-97	Gas Well	P	8	15	S	10	E
43-007-30285-00-00	UTAH 8-98X	Gas Well	P	8	15	S	10	E
43-007-30274-00-00	UTAH 8-99	Gas Well	P	8	15	S	10	E
43-007-30413-00-00	UTAH 9-228	Gas Well	P	9	15	S	9	E
43-007-30414-00-00	UTAH 9-229	Gas Well	P	9	15	S	9	E
43-007-30279-00-00	WILLIAMS 30-78	Gas Well	P	30	14	S	10	E
43-007-30481-00-00	WOOLSTENHULME 05-266	Gas Well	P	5	15	S	10	E
43-015-30250-00-00	UTAH 16-110	Gas Well	Shut In	16	16	S	9	E



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Eastern States Office
7450 Boston Boulevard
Springfield, Virginia 22153

IN REPLY REFER TO
3106.8(932.34)WF

January 16, 2003

NOTICE

ConocoPhillips Company : Oil & Gas Leases
P.O. Box 7500 :
Bartlesville, Oklahoma 74005 :

Merger/Name Change Recognized

Acceptable evidence was received in this office on January 14, 2003, concerning the change of name of Phillips Petroleum Company to **ConocoPhillips Company** and the merger of **Conoco Incorporated** into **ConocoPhillips Company** on Federal oil and gas leases, with **ConocoPhillips Company** being the surviving entity.

The Secretary of the State of Delaware certified the effective date of this merger effective December 31, 2002.

The oil and gas lease files identified on the enclosed exhibit have been noted to the merger. The exhibit was compiled from a list of leases obtained from your list of leases. Eastern States has not abstracted the lease files to determine if the entities affected by this merger hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested record title or operating rights interest. We are notifying the Minerals Management Service and all applicable Bureau of Land Management offices of this merger and name change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify other leases in which the merging entity maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

By Operation of law the name of the principal on Nationwide Oil and Gas Bond held by Conoco Incorporated (ES0085) has been changed to ConocoPhillips Company.

If you have any questions, please contact Bill Forbes at 703-440-1536.

S/ Wilbert B. Forbes

Wilbert B. Forbes
Land Law Examiner
Branch of Use Authorization
Division of Resources Planning, Use
and Protection

cc: JFO, BLM State Offices, MMS, ES RF, 930 RF, ES-932:
Bforbes:wbf:01/16/03:440-1536/ConocoPhillips Co

OPERATOR CHANGE WORKSHEET

011

ROUTING

1. GLH
2. CDW
3. FILE

Change of Operator (Well Sold)

Designation of Agent/Operator

Operator Name Change

X Merger

The operator of the well(s) listed below has changed, effective: **12-31-02**

FROM: (Old Operator):	TO: (New Operator):
PHILLIPS PETROLEUM COMPANY	CONOCOPHILLIPS COMPANY
Address: 980 PLAZA OFFICE	Address: P O BOX 2197, WL3 4066
BARTLESVILLE, OK 74004	HOUSTON, TX 77252
Phone: 1-(918)-661-4415	Phone: 1-(832)-486-2329
Account No. N1475	Account No. N2335

CA No.

Unit:

WELL(S)

NAME	SEC TWN RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
UTAH 24-636	24-13S-09E	43-007-30855	13563	STATE	GW	DRL
UTAH 25-618	25-13S-09E	43-007-30817	99999	STATE	GW	APD
DALLIN 32-615	32-13S-09E	43-007-30837	99999	FEE	GW	APD
ROWLEY 32-616	32-13S-09E	43-007-30838	99999	FEE	GW	APD
PRICE 32-625	32-13S-09E	43-007-30839	99999	FEE	GW	NEW
RITZAKIS 33-516	33-13S-09E	43-007-30766	99999	FEE	GW	APD
USA 33-515	33-13S-09E	43-007-30835	99999	FEDERAL	GW	APD
USA 33-624	33-13S-09E	43-007-30836	99999	FEDERAL	GW	APD
RITZAKIS 33-514	33-13S-09E	43-007-30813	99999	FEE	GW	APD
UTAH 34-511	34-13S-09E	43-007-30816	13516	STATE	GW	P
UTAH 34-513	34-13S-09E	43-007-30820	13511	STATE	GW	P
UTAH 34-512	34-13S-09E	43-007-30767	13510	STATE	GW	P
UTAH 34-510	34-13S-09E	43-007-30506	13168	STATE	GW	P
UTAH 35-506	35-13S-09E	43-007-30814	99999	STATE	GW	APD
UTAH 35-507	35-13S-09E	43-007-30815	99999	STATE	GW	APD
UTAH 35-508	35-13S-09E	43-007-30821	99999	STATE	GW	NEW
UTAH 35-509	35-13S-09E	43-007-30822	99999	STATE	GW	NEW
USA 01-519	01-14S-08E	43-007-30830	99999	FEDERAL	GW	NEW
USA 14-490	14-14S-08E	43-007-30805	99999	FEDERAL	GW	APD
USA 14-491	14-14S-08E	43-007-30806	99999	FEDERAL	GW	APD

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 01/08/2003
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 01/08/2003
- The new company has been checked through the Department of Commerce, Division of Corporations Database on: 02/03/2003
- Is the new operator registered in the State of Utah: YES Business Number: 562960-0143
- If **NO**, the operator was contacted on: _____

6. (R649-9-2)Waste Management Plan has been received on: IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: 01/14/2003

8. **Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: 01/14/2003

9. **Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: 01/14/2003

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

DATA ENTRY:

1. Changes entered in the **Oil and Gas Database** on: 02/12/2003

2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 02/12/2003

3. Bond information entered in RBDMS on: N/A

4. Fee wells attached to bond in RBDMS on: N/A

STATE WELL(S) BOND VERIFICATION:

1. State well(s) covered by Bond Number: 8140-60-24

FEDERAL WELL(S) BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: 8015-16-69

INDIAN WELL(S) BOND VERIFICATION:

1. Indian well(s) covered by Bond Number: N/A

FEE WELL(S) BOND VERIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number 6196922

2. The **FORMER** operator has requested a release of liability from their bond on: N/A

The Division sent response by letter on: N/A

LEASE INTEREST OWNER NOTIFICATION:

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: N/A

COMMENTS:

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

012

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-48269
2. NAME OF OPERATOR: ConocoPhillips Company		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: NA
3. ADDRESS OF OPERATOR: P.O. Box 851 CITY Price STATE UT ZIP 84501		7. UNIT or CA AGREEMENT NAME: Drunkards Wash UTU-67921X
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2238' FNL, 1789' FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SENW 34 T13 09E S		8. WELL NAME and NUMBER: Utah 34-511
PHONE NUMBER: (435) 613-9777		9. API NUMBER: 4300730816
COUNTY: Carbon		10. FIELD AND POOL, OR WILDCAT: Drunkards Wash
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input checked="" type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Please be advised that ConocoPhillips Company is planning to plug and abandon the Utah 34-511 well. Please see attached for a summary of the Plug and Abandon procedures for this well.

COPY SENT TO OPERATOR
Date: 8-19-05
Initials: GHD

NAME (PLEASE PRINT) <u>Jean Semborski</u>	TITLE <u>Construction/Asset Integrity Supervisor</u>
SIGNATURE <u><i>Jean Semborski</i></u>	DATE <u>8/3/2005</u>

(This space for State use only)

APPROVED BY THE STATE
OF UTAH DIVISION OF
OIL, GAS, AND MINING
DATE: 8/15/05
BY: *[Signature]*
* See Attached Conditions of Approval

RECEIVED
AUG 08 2005

DIV. OF OIL, GAS & MINING



Drunkard's Wash P&A Procedure

'Our work is never so urgent or important that we cannot take time to do it safely.'

Well: Utah 34-511

PROCEDURE:

Ensure that well is shut in, both casing & tubing valves will be isolated with locks and tags, bleed off tubing pressure.

Lock out tag out & try will be applied to main power box and pumping unit will be fully secured with restraints and tie downs.

1. HOLD PRE-JOB SAFETY MEETING WITH RIG CREW VERIFY ALL HAZARDS ON LOCATION.
2. N/D WELLHEAD, N/U BOPs, R/U PUMP EQUIPMENT. TEST BOPs W/ ONE 1000 PSI HIGH AND ONE 300 PSI LOW ON BOTH SETS OF RAMS, R/U FLOOR AND TBG EQUIPMENT.
3. PULL TBG HANGER, R/U TBG INSPECTION UNIT, L/D TBG W/ 35% OR > IN WALL LOSS.
4. RIH W/ 4 3/4 BIT & SCRAPER PLUS TBG STRING TO +/- 3000'.
5. POOH W/ TBG & BIT AND SCRAPER.
6. RIH W/ 5.5 CEMENT RETAINER, +/- 98 JTS OF 2 7/8" TBG, SET RETAINER @ 3000', FILL AND TEST TBG STRING TO 1000 PSI, ROTATE OUT OF RETAINER, FILL AND TEST CASING TO 1000 PSI.
7. STING BACK INTO 5.5 RETAINER, R/U PUMP TRUCKS, PUMP 26 SACKS OF NEAT TYPE (G) CEMENT, TO FILL FROM BOTTOM PERF TO RETAINER.
8. STING OUT OF RETAINER, PU 6', SET EOT @ +/- 2994', R/U CEMENT PUMPS, PUMP 334 sks OF TYPE (G) CEMENT, CIRCULATE CEMENT TO SURFACE.
9. POOH L/D 2 7/8" STRING,
10. PUMP TOP OF HOLE W/ 34 sks TYPE (G) CEMENT, TO FILL TBG DISPLACEMENT.
11. N/D BOP's AND R/D RIG 278.
12. CUT OFF CASING BELOW SURFACE. INSTALL P&A MARKER AS PER REGULATORY REQUIREMENTS.
13. CUT OFF ANCHORS AND RESTORE LOCATION.



State of Utah

Department of
Natural Resources

MICHAEL R. STYLER
Executive Director

Division of
Oil, Gas & Mining

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

CONDITIONS OF APPROVAL TO PLUG AND ABANDON WELL

Well Name and Number: Utah 34-511
API Number: 43-007-30816
Operator: ConocoPhillips Company
Reference Document: Original Sundry Notice Dated August 3, 2005
Received by DOGM on August 8, 2005

Approval Conditions:

1. Notify the Division at least 24 hours prior to conducting abandonment operations. Please call Dan Jarvis at 801-538-5338.
2. ADD PLUG – inside/outside plug from +/- 408' - 308'. Squeeze Perfs @ +/- 408' with CICR @ +/- 358'. Squeeze approximately 50 sks of 1.18 yield cement below retainer and approximately 6 sacks of 1.18 yield cement above retainer. Protect surface casing shoe R649-3-24-3.5.
3. All intervals between plugs shall be filled with noncorrosive fluid.
4. All annuli shall be cemented from a minimum depth of 100' to the surface.
5. All requirements in the Oil and Gas Conservation General Rule R649-3-24 shall apply.
6. If there are any changes to the plugging procedure or the wellbore configuration, notify Dustin Doucet at 801-538-5281 prior to continuing with the procedure.
7. All other requirements for notice and reporting in the Oil and Gas Conservation General Rules shall apply.

Dustin K. Doucet
Petroleum Engineer

August 15, 2005

Date

API Well No: 43-007-30816-00-00 Permit No:
 Company Name: CONOCOPHILLIPS COMPANY
 Location: Sec: 34 T: 13S R: 9E Spot: SENW
 Coordinates: X: 508337 Y: 4389049
 Field Name: DRUNKARDS WASH
 County Name: CARBON

Well Name/No: UTAH 34-511

String Information

String	Bottom (ft sub)	Diameter (inches)	Weight (lb/ft)	Length (ft)
HOL1	15	15		
COND	15	12.75		
HOL2	358	11		
SURF	358	8.625	24	358
HOL3	3482	7.875		
PROD	3482	5.5	17 7.661	3482
TI	3309	2.875		

5.192



Conductor: 12.75 in. @ 15 ft.
 Hole: 15 in. @ 15 ft.
 Cement from 358 ft.
 Surface: 8.625 in. @ 358 ft.
 Hole: 11 in. @ 358 ft.

EST TOC 1400
Bond Log

TOC - 1400
Jim Weaver
Conoco-Phillips
8/15/05

TOC ??
No CBL

Csg shoe plug

Above $(50) / (1.18) (7.661) = 6 \text{ SKS}$
below $(50) / (1.18) (7.661) = 6 \text{ SKS}$

$(1.2)(11)^2 - 5.53 = 1.273$

Cement Information

String	BOC (ft sub)	TOC (ft sub)	Class	Sacks
PROD	3482		TR	90
SURF	358	0	G	175

Perforation Information

Top (ft sub)	Bottom (ft sub)	Shts/Ft	No Shts	Dt Squeeze
3058	3203			

Formation Information

Formation	Depth
BLUGT	2852
FRSD	3020
TNUNK	3342

Cement from 3482 ft.
 Tubing: 2.875 in. @ 3309 ft.
 Production: 5.5 in. @ 3482 ft.
 Hole: 7.875 in. @ 3482 ft.
 Hole: Unknown

TD: 3510 TVD: 3510 PBD: 3482

ORIGINAL

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT--" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

Oil Gas

2. Name of Operator

ConocoPhillips

3. Address and Telephone No.

6825 South 5300 West, P.O. Box 851, Price, Utah 84501 (435) 613-9777

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

2238' FNL, 1789' FWL
SE/NW, SEC. 34, T13S, R09E, SLB&M

5. Lease Designation and Serial No.

ML-48269

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA, Agreement Designation

Drunkards Wash UTU-67921X

8. Well Name and No.

Utah 34-511

9. API Well No.

43-007-30816

10. Field and Pool, or Exploratory Area

Drunkards Wash

11. County or Parish, State

Carbon County, Utah

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Online Notice	<input type="checkbox"/> Change of Plans
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Change of Name	<input type="checkbox"/> New Construction
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Recompletion	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Plugging Back	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Dispose Water
	<input checked="" type="checkbox"/> Other <u>Plug & Abandon</u>	

(Note: Report results of multiple completion on Well Completion or

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

10-4-05: SET CEMENT RETAINER AT 3010'. PUMPED 26 SACKS CLASS 'G' CEMENT BELOW RETAINER AND FILLED 5 1/2" CASING TO SURFACE WITH 290 SACKS CLASS 'G' CEMENT. PA WAS WITNESSED BY MARK JONES WITH DOGM

10-5-05: PERFORATE CASING AT 320' AS PER MARK JONES WITH DOGM.

10-6-05: PUMPED 130 SACKS CLASS 'G' CEMENT DOWN 5 1/2" AND UP 8 5/8" TO SURFACE. WITNESSED BY MARK JONES WITH DOGM.

10-13-05: CASING WAS CUT OFF BELOW SURFACE AND WELDED ON A PA MARKER WITH THE FOLLOWING INSCRIPTION:

CONOCOPHILLIPS COMPANY
UTAH 34-511
API 4300730816
SE/W S34-T13S-R9E
CARBON COUNTY

RECEIVED

NOV 01 2005

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Signed Lynette Allred Title Sr. Operations Assistant Date October 25, 2005

(This space for Federal or State office use)

Approved by _____ Title _____ Date _____

Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

FORM 9

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

NOV 19 2013

DIV. OF OIL, GAS & MINING

SUNDRY NOTICES AND REPORTS ON WELLS

5. LEASE DESIGNATION AND SERIAL NUMBER:

ML-48269

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

N/A

7. UNIT or CA AGREEMENT NAME:

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

8. WELL NAME and NUMBER:

Utah 34-511

9. API NUMBER:

4300730816

10. FIELD AND POOL, OR WILDCAT:

Drunkards Wash

1. TYPE OF WELL

OIL WELL

GAS WELL

OTHER _____

2. NAME OF OPERATOR:

ConocoPhillips Company

3. ADDRESS OF OPERATOR:

6825 South 5300 West CITY Price

STATE UT ZIP 84501

PHONE NUMBER:

(435) 613-9777

4. LOCATION OF WELL

FOOTAGES AT SURFACE: 2238 FNL, 1789 FWL

COUNTY: Carbon County

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SENW 34 T13S 9E S

STATE:

UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: <u>11/18/2013</u>	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Soil vapor testing</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

One 2-inch diameter temporary soil gas sample collection well will be installed in the vicinity of the well head (within five feet), three wells will be installed within 50 feet of the well head, for a total of up to four temporary soil gas sample collection wells. Wells will be advanced at least two feet into the native soil below pad material, for a total depth no less than four feet below ground surface (ft bgs) and no greater than ten ft bgs.

The well will consist of a filtered sample port connected to a sample collection tube within a 2-inch diameter PVC screen (2 feet in length) and casing which will extend approximately 18 inches above the ground surface. The casing will be secured within a sand pack and completed with a bentonite grout plug placed above the sand interval and grouted to ground surface. A sample collection valve will be connected to the sample collection tube. An estimated three gas samples will be collected per temporary soil gas sample collection well. The temporary soil gas sample collection wells are anticipated to be left in place for three to five years to facilitate further sampling. After that time the well will be abandoned by removal of the probe, PVC casing, and bentonite grout plug; and the well will be filled to ground surface with bentonite grout.

Additionally, in the area surrounding the temporary soil gas collection wells, a soil probe of less than one inch in diameter will be advanced, at eight or more points, to approximately five ft bgs to create a space to scan with a gas detector. Following measurements the holes will be manually filled with surface soil.

NAME (PLEASE PRINT)

Donna Williams

TITLE

Sr. Advisor

SIGNATURE

[Signature]

DATE

11/14/13

Approved by the

Utah Division of
Oil, Gas and Mining

(This space for State use only)

COPY SENT TO OPERATOR

Date: 11.21.2013

Initials: KS

Date: 11/21/13

By: [Signature]

INSTRUCTIONS

This form shall be submitted by the operator to show the intention and/or completion of the following:

- miscellaneous work projects and actions for which other specific report forms do not exist;
- all other work and events as identified in section 11, Type of Action, or as required by the Utah Oil and Gas Conservation General Rules, including:
 - minor deepening of an existing well bore,
 - plugging back a well,
 - recompleting to a different producing formation within an existing well bore (intent only),
 - re-perforating the current producing formation,
 - drilling a sidetrack to repair a well,
 - reporting monthly the status of each drilling well.

This form is not to be used for proposals to

- drill new wells,
- reenter previously plugged and abandoned wells,
- significantly deepen existing wells below their current bottom-hole depth,
- drill horizontal laterals from an existing well bore,
- drill hydrocarbon exploratory holes such as core samples and stratigraphic tests.

Use Form 3, Application for Permit to Drill (APD) for such proposals.

NOTICE OF INTENT - A notice of intention to do work on a well or to change plans previously approved shall be submitted in duplicate and must be received and approved by the division before the work is commenced. The operator is responsible for receipt of the notice by the division in ample time for proper consideration and action. In cases of emergency, the operator may obtain verbal approval to commence work. Within five days after receiving verbal approval, the operator shall submit a Sundry Notice describing the work and acknowledging the verbal approval.

SUBSEQUENT REPORT - A subsequent report shall be submitted to the division within 30 days of the completion of the outlined work. Specific details of the work performed should be provided, including dates, well depths, placement of plugs, etc.

WELL ABANDONMENT - Proposals to abandon a well and subsequent reports of abandonment should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, and method of parting of any casing, liner, or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.

In addition to any Sundry Notice forms submitted, **Form 8, Well Completion or Recompletion Report and Log** must be submitted to the division to report the results of the following operations:

- completing or plugging a new well,
- reentering a previously plugged and abandoned well,
- significantly deepening an existing well bore below the current bottom-hole depth,
- drilling horizontal laterals from an existing well bore,
- drilling hydrocarbon exploratory holes such as core samples and stratigraphic tests,
- recompleting to a different producing formation.

Send to:

Utah Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
Box 145801
Salt Lake City, Utah 84114-5801

Phone: 801-538-5340

Fax: 801-359-3940



Figure 1
 SITE PLAN
 UTAH 34-511 (P&A)
 SOIL METHANE INVESTIGATION
 DRUNKARDS WASH FIELD, CARBON COUNTY, UTAH
 ConocoPhillips Company

RE: ESRI 2011 World Imagery.



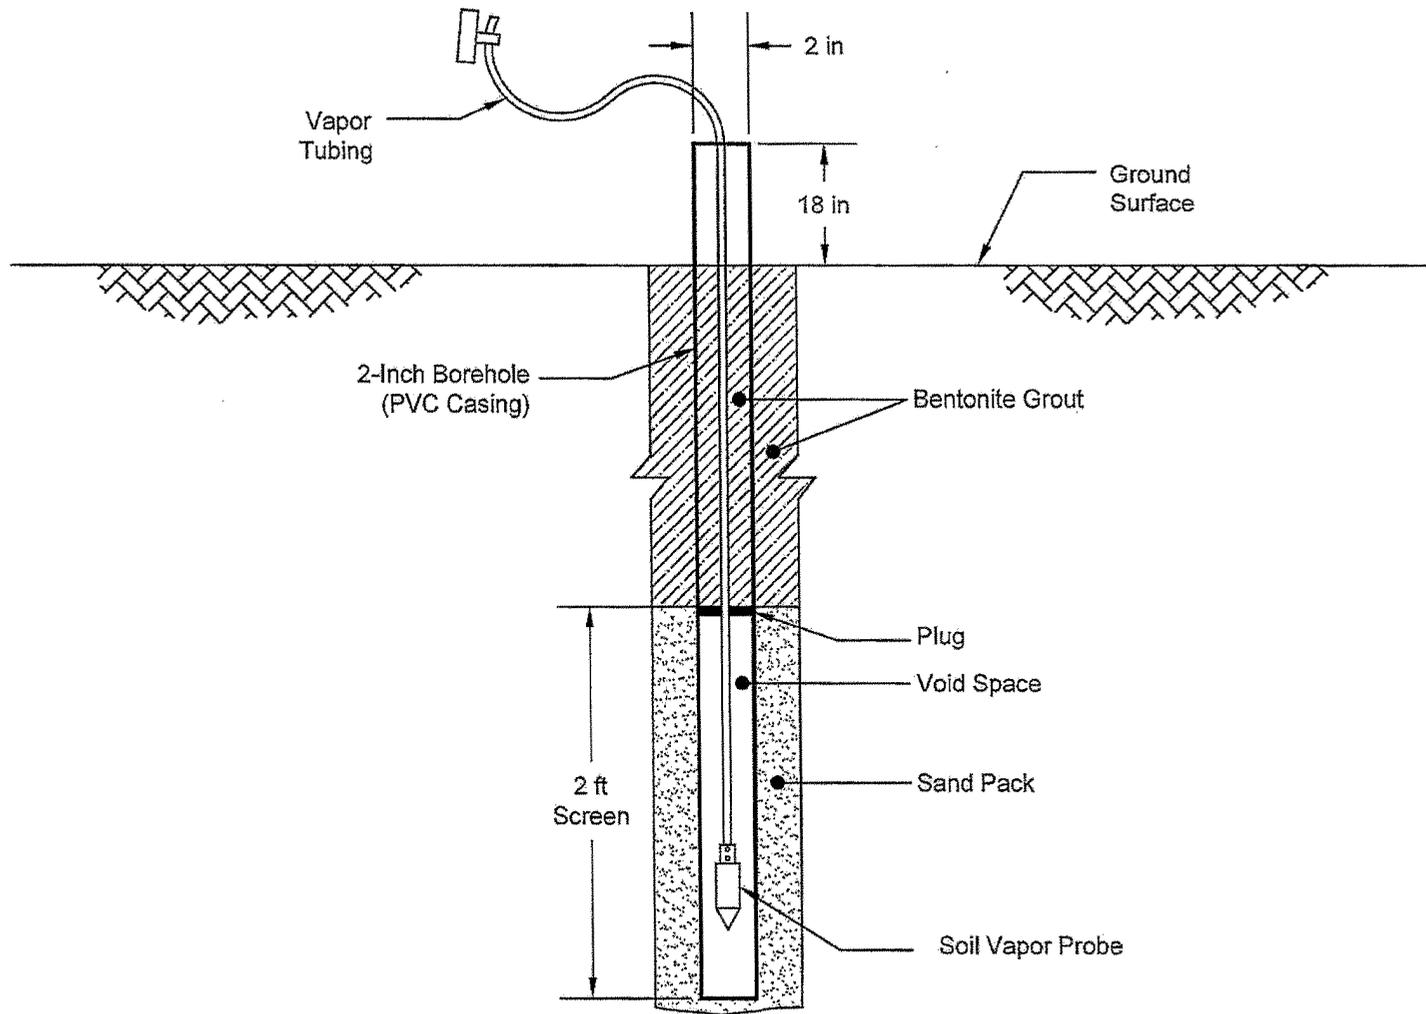


Figure 2

SOIL GAS MONITOR WELL SCHEMATIC
 SOIL METHANE INVESTIGATION
 DRUNKARDS WASH FIELD, CARBON COUNTY, UTAH
 ConocoPhillips Company

