

FILE NOTATIONS

Entered in NID File	<input checked="" type="checkbox"/>	Checked by Chief	.....
Entered On S R Sheet	.....	Copy NID to Field Office	.....
Location Map Pinned	.....	Approval Letter	.....
Card Indexed	<input checked="" type="checkbox"/>	Disapproval Letter	.....
IWR for State or Fee Land	.....		

COMPLETION DATA:

Date Well Completed	3-5-77 S.I.	Location Inspected	.....
OW.....	WW.....	TA.....	
GW.....	OS.....	PA.....	
		Bond released	.....
		State of Fee Land	.....

LOGS FILED

Driller's Log	<input checked="" type="checkbox"/>						
Electric Logs (No. )	<input checked="" type="checkbox"/>						
E.....	I.....	E-I.....	GR.....	GR-N.....	Micro.....		
Lat.....	Mi-L.....	Sonic.....	Others.....				

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

5. LEASE DESIGNATION AND SERIAL NO.  
SLC 045051-b *Fed*

6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
-

7. UNIT AGREEMENT NAME  
Clay Basin Unit

8. FARM OR LEASE NAME  
Unit Well

9. WELL NO.  
24

10. FIELD AND POOL, OR WILDCAT  
Clay Basin

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
NW SW 21-3N-24E

12. COUNTY OR PARISH 13. STATE  
Daggett Utah

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK


1a. TYPE OF WORK  
DRILL  DEEPEN  PLUG BACK

b. TYPE OF WELL  
OIL WELL  GAS WELL  OTHER  SINGLE ZONE  MULTIPLE ZONE

2. NAME OF OPERATOR  
Mountain Fuel Supply Company

3. ADDRESS OF OPERATOR  
P. O. Box 1129, Rock Springs, Wyoming

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)  
At surface 2519' FSL, 771' FWL NW SW  
At proposed prod. zone

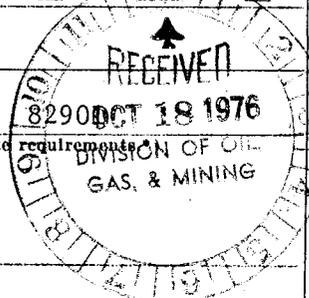

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE\*  
41 miles south of Rock Springs, Wyoming

10. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any)	121'	16. NO. OF ACRES IN LEASE	1900.74	17. NO. OF ACRES ASSIGNED TO THIS WELL	-
18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT.	-	19. PROPOSED DEPTH	5790'	20. ROTARY OR CABLE TOOLS	Rotary
21. ELEVATIONS (Show whether DF, RT, GR, etc.)	GR 6358'	22. APPROX. DATE WORK WILL START*		When approved	

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12-1/4"	9-5/8" New	36# K-55	300'	160 sx, [D43A]
8-3/4"	7" New	23# K-55	5790'	To be determined

We would like to drill the subject well to an estimated depth of 5790', anticipated formation tops are as follows: Mancos at the surface, Frontier at 5240', Mowry at 5440', and Dakota at 5590'.

Mud will be adequate to contain formation fluids and in sufficient quantities to efficiently drill the well; blowout preventers will be checked daily and pressure tested after each string of casing is set. Expect oil/gas at 5240' and 5590'. Plan to core 50' in Mowry and 50' in Dakota, no DST's, plan to run DIL, Sonic, CNL logs. No abnormal pressures, temperatures, or H2S expected. Drilling time about 17 days.


APPROVED BY THE DIVISION OF OIL, GAS, AND MINING  
DATE: 10-19-76  
BY: C. B. Lightfoot

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present production zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED *R. G. Meyer* TITLE Manager, Drilling and Petroleum Engineering DATE Oct. 15, 1976

(This space for Federal or State office use)  
PERMIT NO. 43-009-30015

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

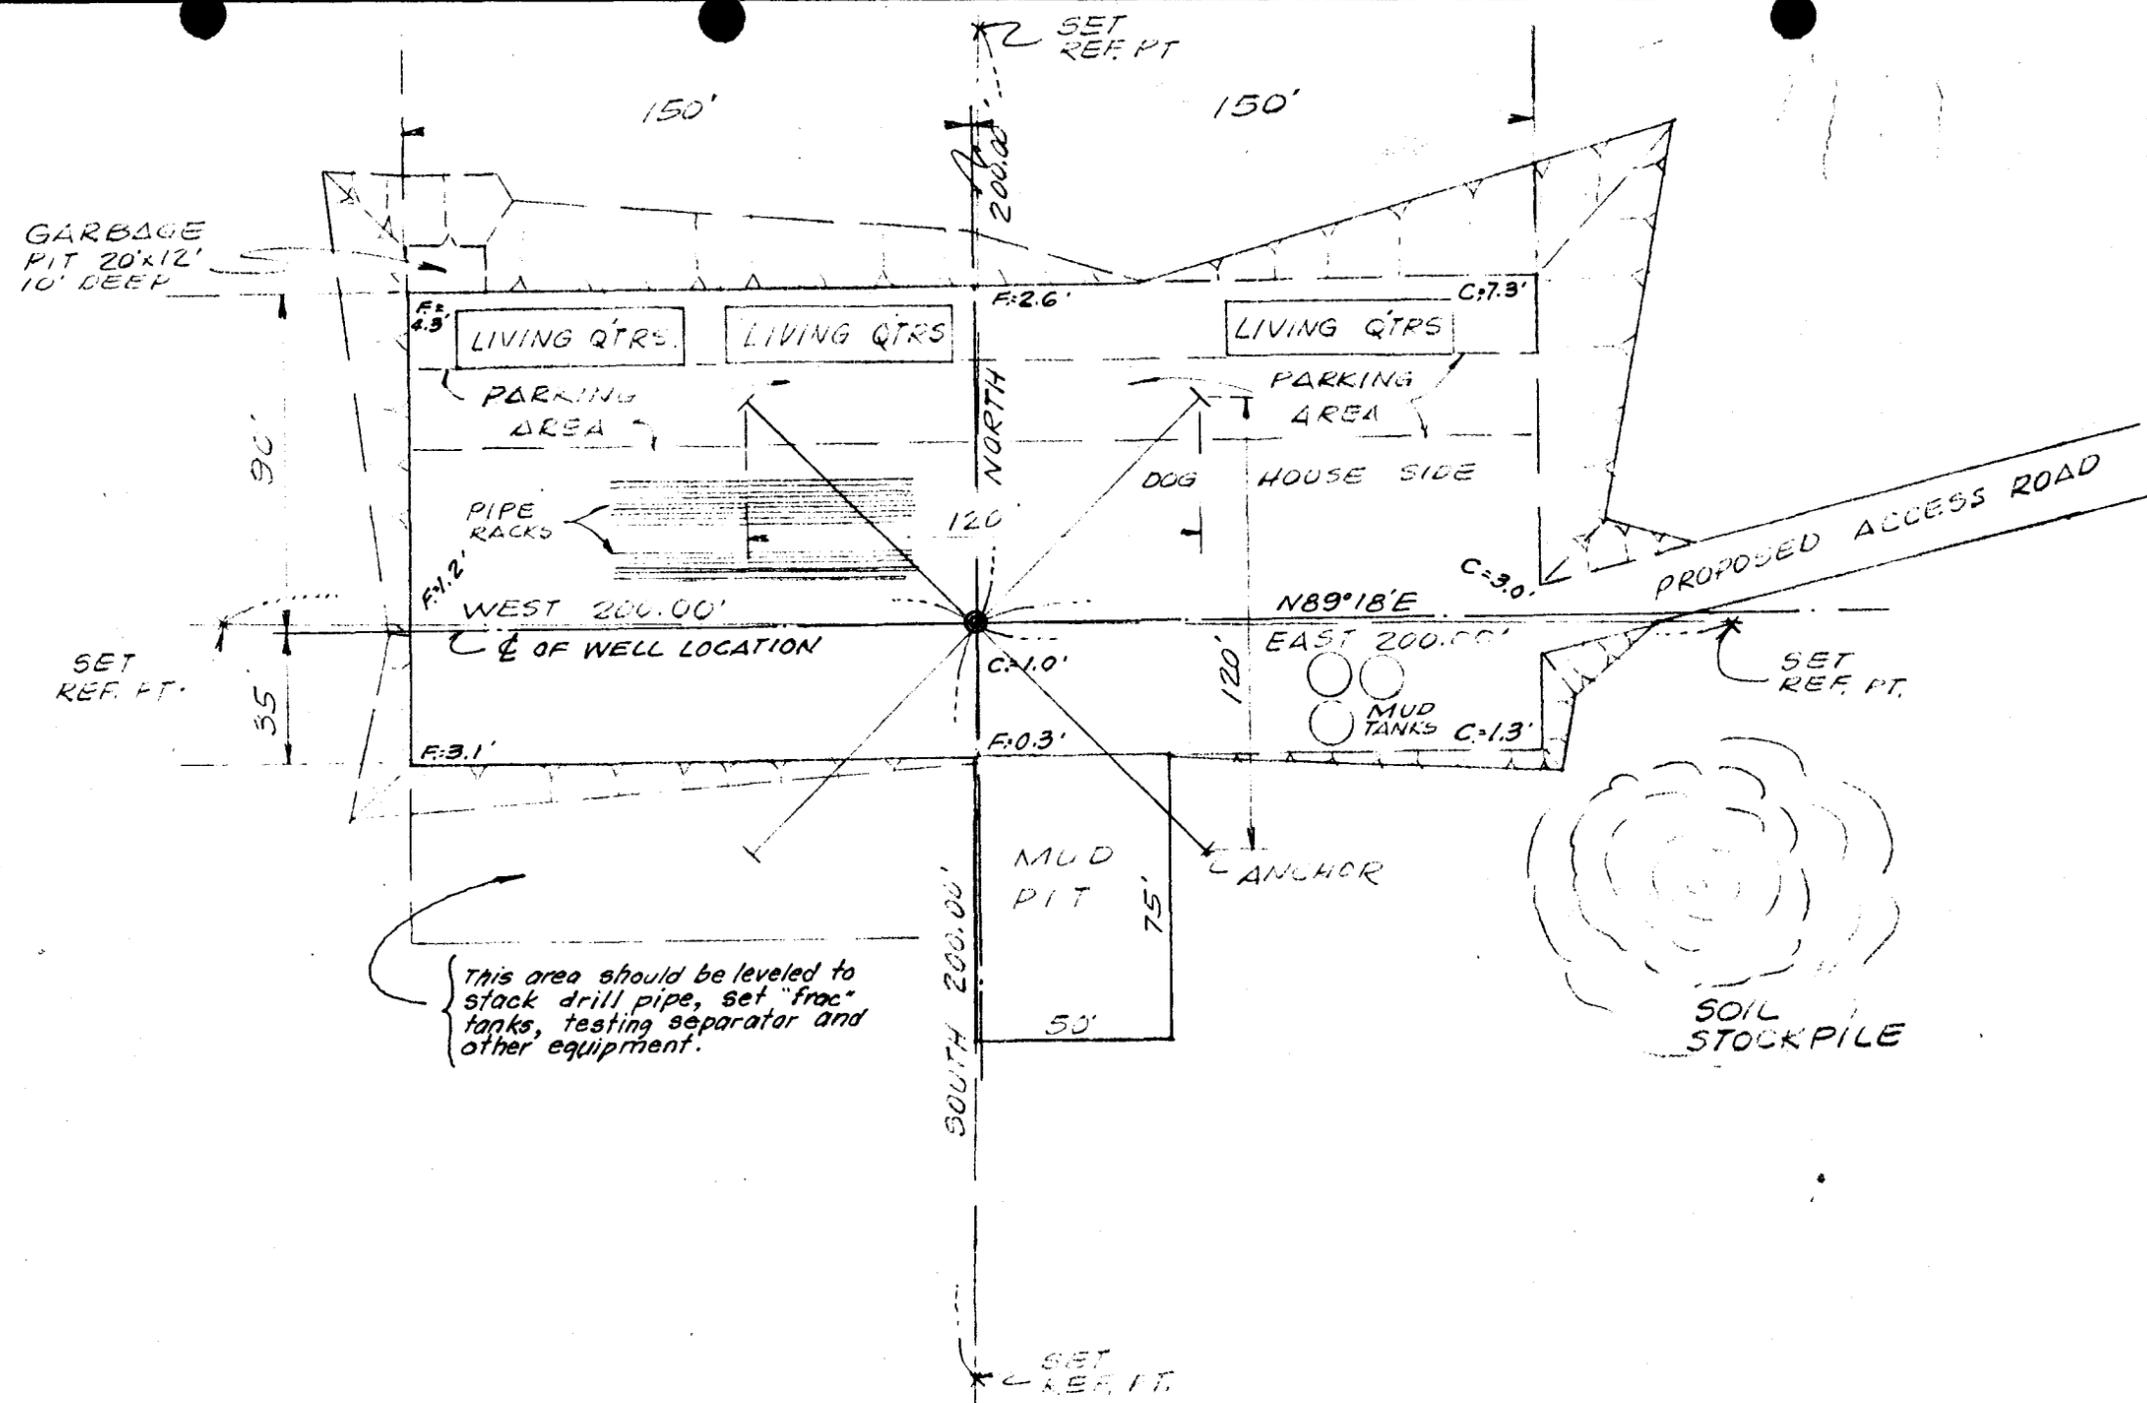

ENLARGED WELL SITE PLAN  
SCALE 1" = 50'


**GENERAL NOTES:**

At sites where topsoil is present, same is to be removed and stored on the adjacent land for restoration of the site when required.


Mud pit and garbage pit are to be fenced, *unlined*  
For well location profiles see DWG M-12257

LEGEND		ENGINEERING RECORD	
⊕	WELL	SURVEYED BY	S.M. Fabian 9-13-76
⊕	STONE CORNER	REFERENCES	G.L.O. PLAT <input checked="" type="checkbox"/> U.S.G.S. QUAD. MAP <input type="checkbox"/>
⊕	PIPE CORNER	LOCATION DATA	
		FIELD	CLAY BASIN
		LOCATION: NW1/4, SW1/4, SEC. 21, T3N, R24E, SALT LAKE MERIDIAN - 2519' FSL, 771' FWL	
		DAGGETT COUNTY, UTAH.	
		WELL ELEVATION: 6358 (AS GRADED) BY VERTICAL ANGLE OBSERVATION FROM M.F.S. CO. BENCH MARK Δ 120	

DRILLING W.O.

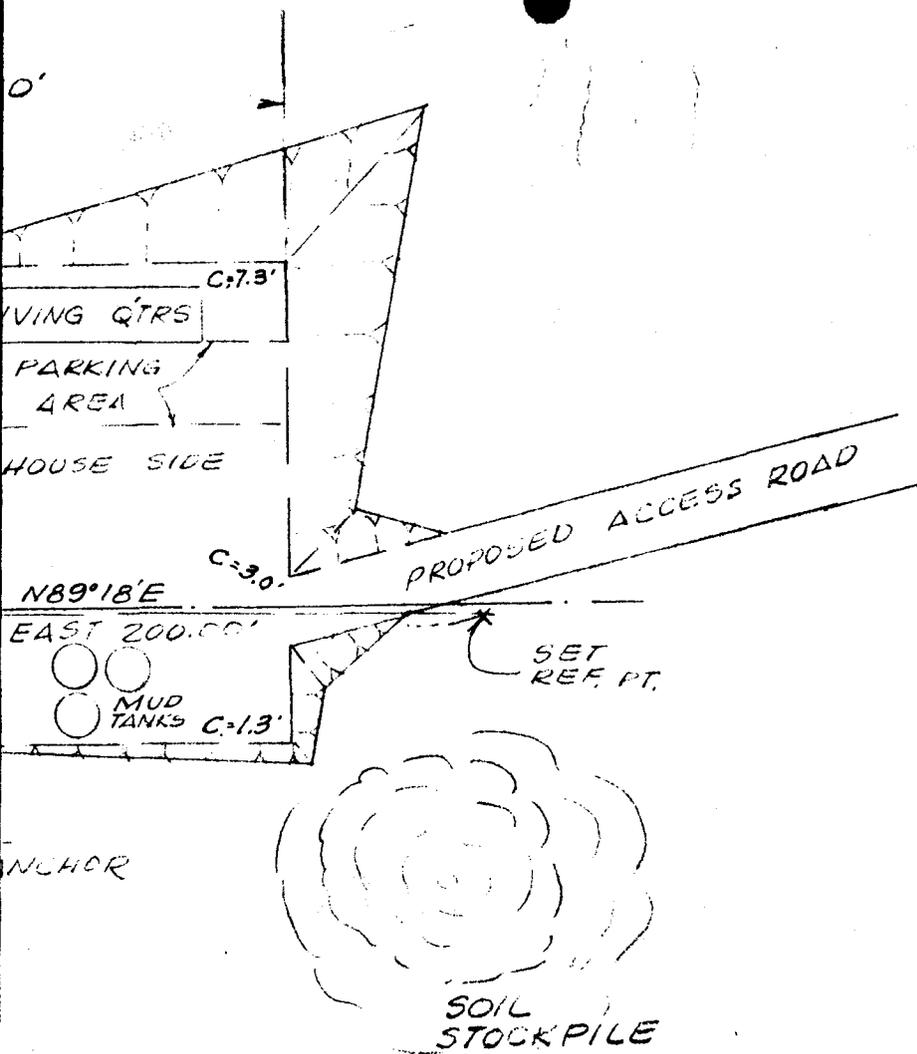

ENLARGED WELL SITE PLAN  
SCALE 1" = 50'

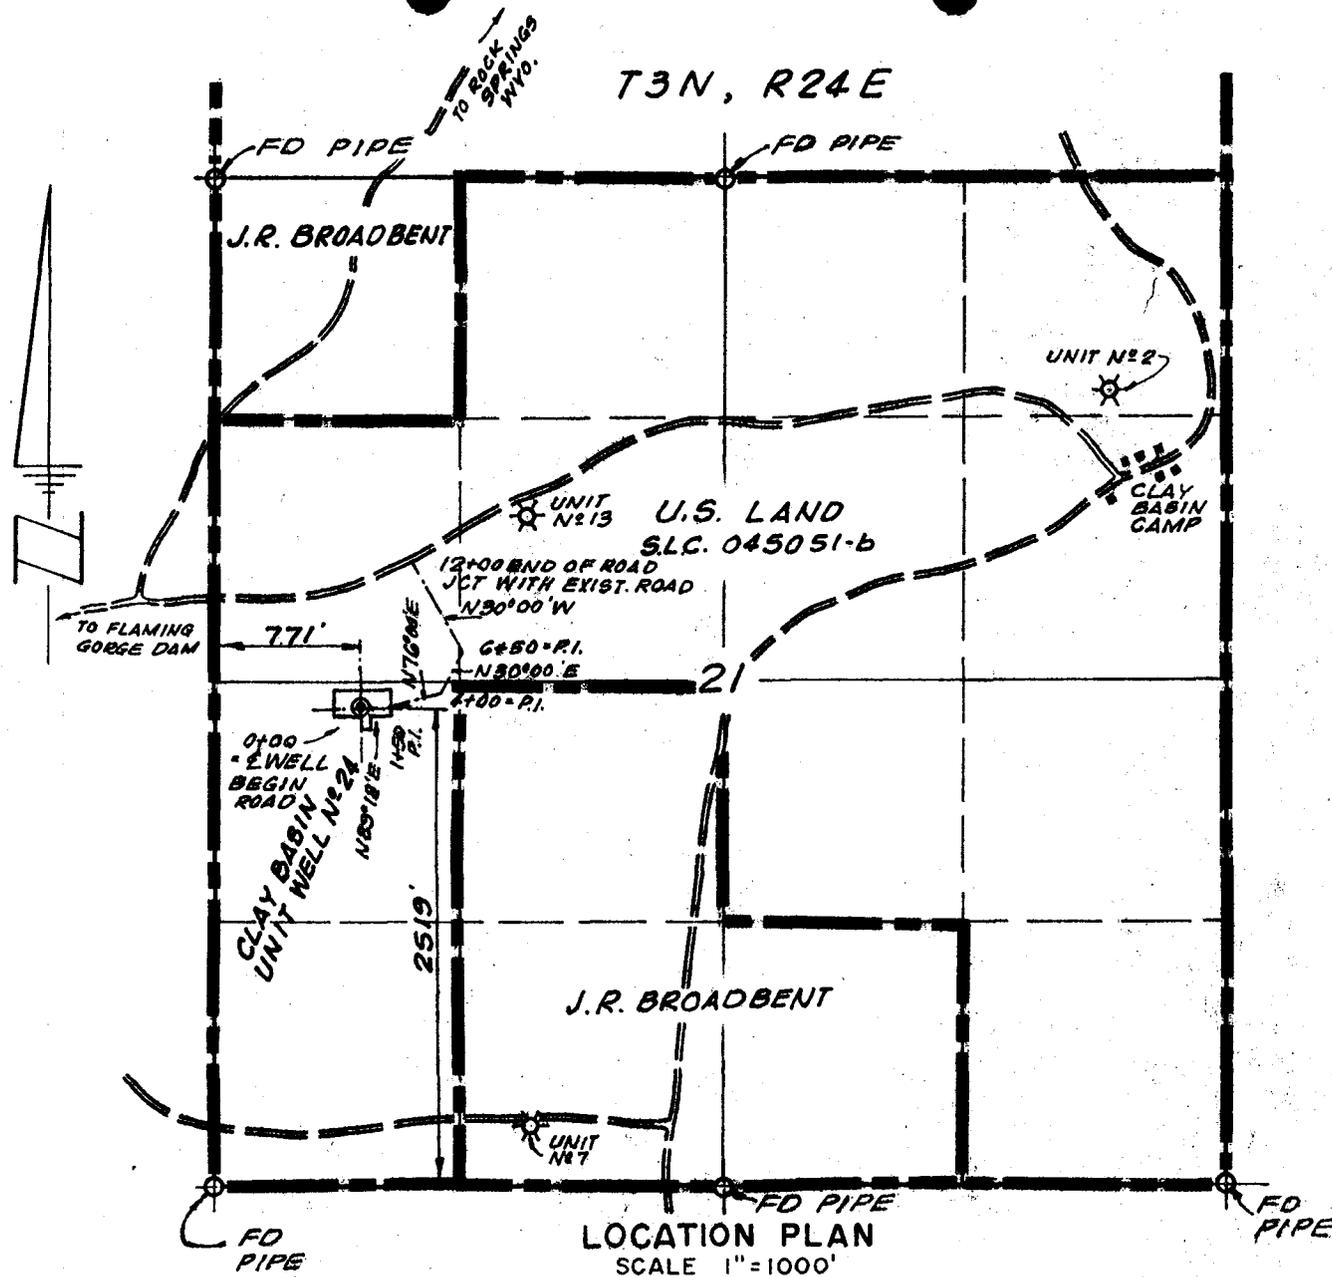





LOCATION PLAN  
SCALE 1" = 1000'

This is to certify that the above plat was prepared from field notes of actual surveys made by me or under my supervision and that the same are true and correct to the best of my knowledge.

*[Signature]*  
ENGINEER  
UTAH REGISTRATION L.S. N° 3521




DRILLING W.O.

LEGEND	ENGINEERING RECORD		REVISIONS				 <b>MOUNTAIN FUEL</b> SUPPLY COMPANY ROCK SPRINGS, WYOMING
	SURVEYED BY	NO.	DESCRIPTION	DATE	BY		
 WELL  STONE CORNER  PIPE CORNER	S.M. Fabian	9-13-76					CERTIFIED WELL LOCATION AND WELL SITE PLAN <b>CLAY BASIN</b> <b>UNIT WELL N° 24</b>
	REFERENCES	G.L.O. PLAT <input checked="" type="checkbox"/> U.S.G.S. QUAD. MAP <input type="checkbox"/>					
	LOCATION DATA						DRAWN: 9-21-76 AHW SCALE: AS NOTED CHECKED: APPROVED: <i>[Signature]</i> DRWG. NO. M 12256 1/2
	FIELD	CLAY BASIN					
	LOCATION: NW 1/4, SW 1/4, SEC. 21, T3N, R24E, SALT LAKE MERIDIAN - 2519' FSL, 771' FWL						
	DAGGETT COUNTY, UTAH.						
	WELL ELEVATION: 6358 (AS GRADED) BY VERTICAL ANGLE OBSERVATION FROM M.F.S. CO. BENCH MARK Δ 120						

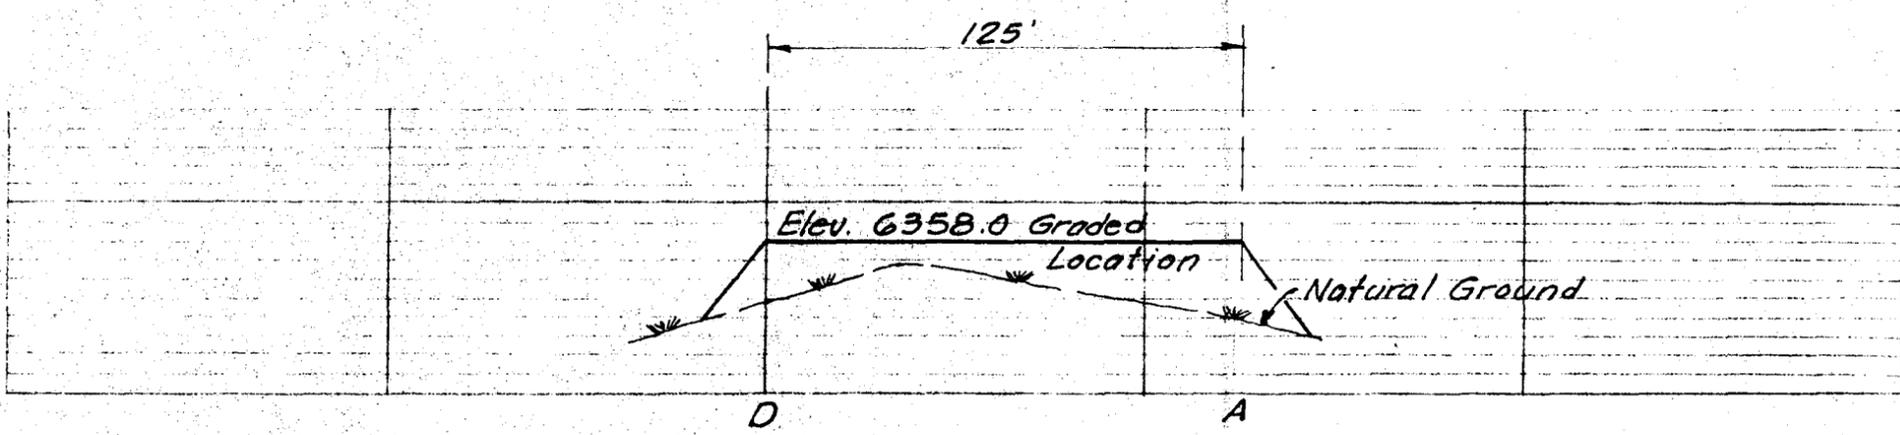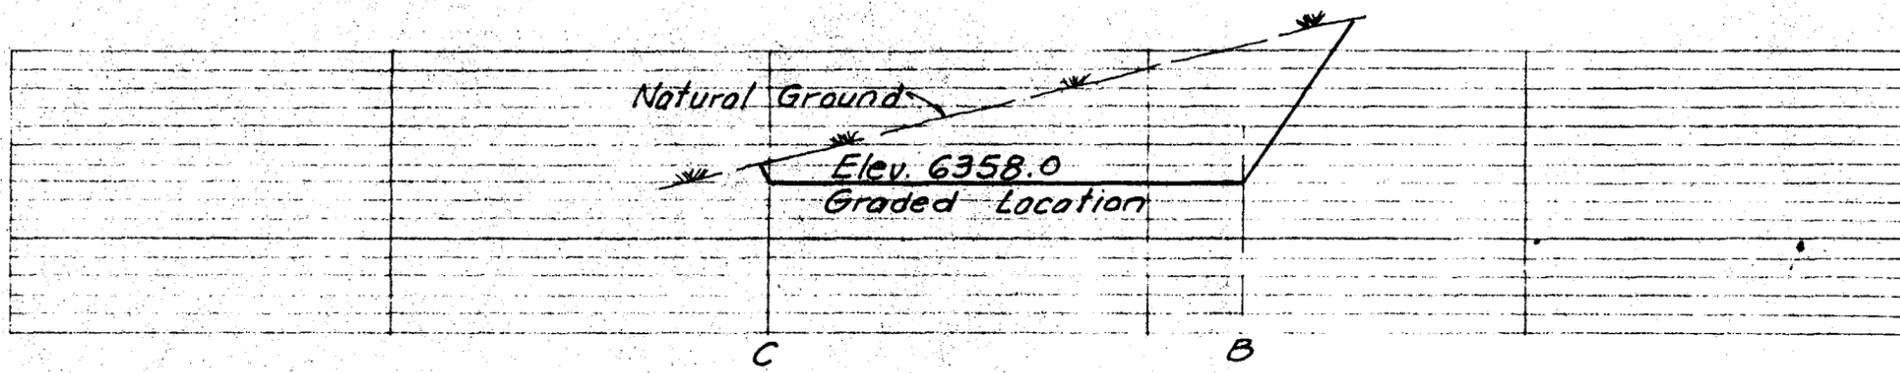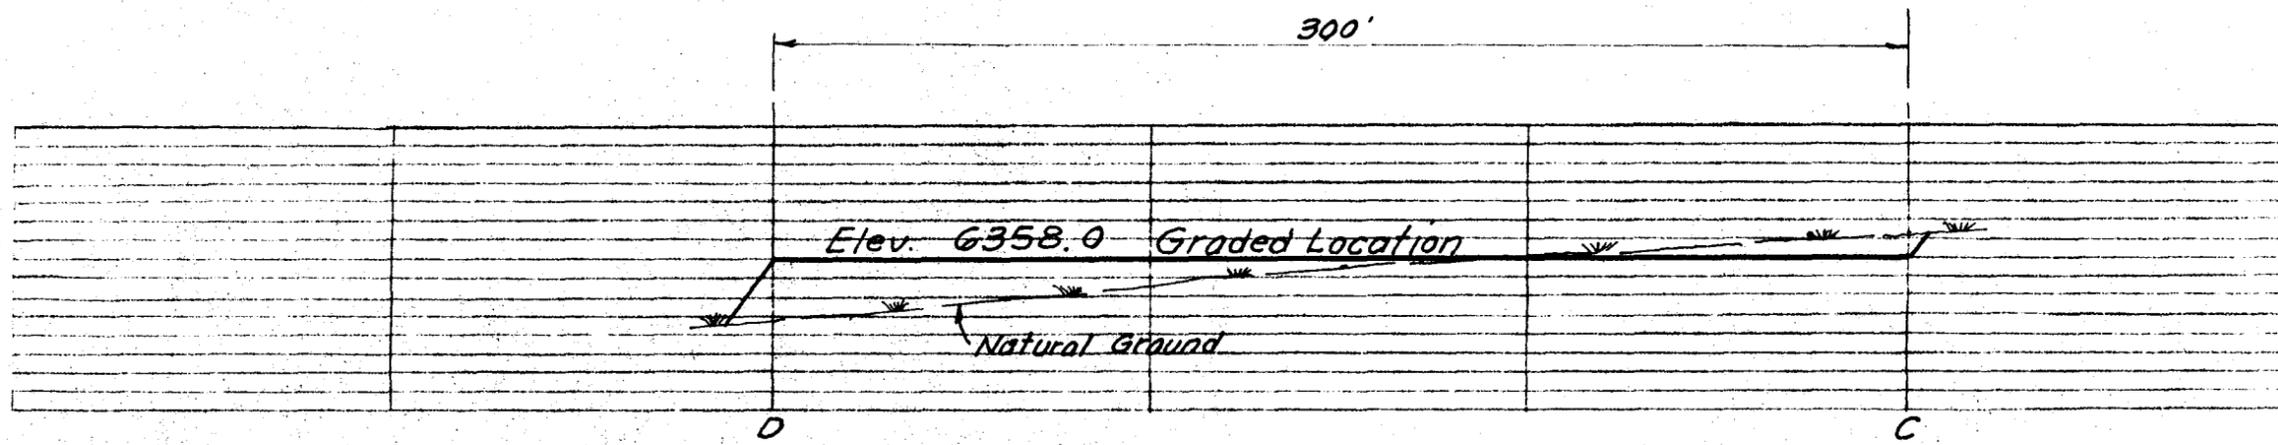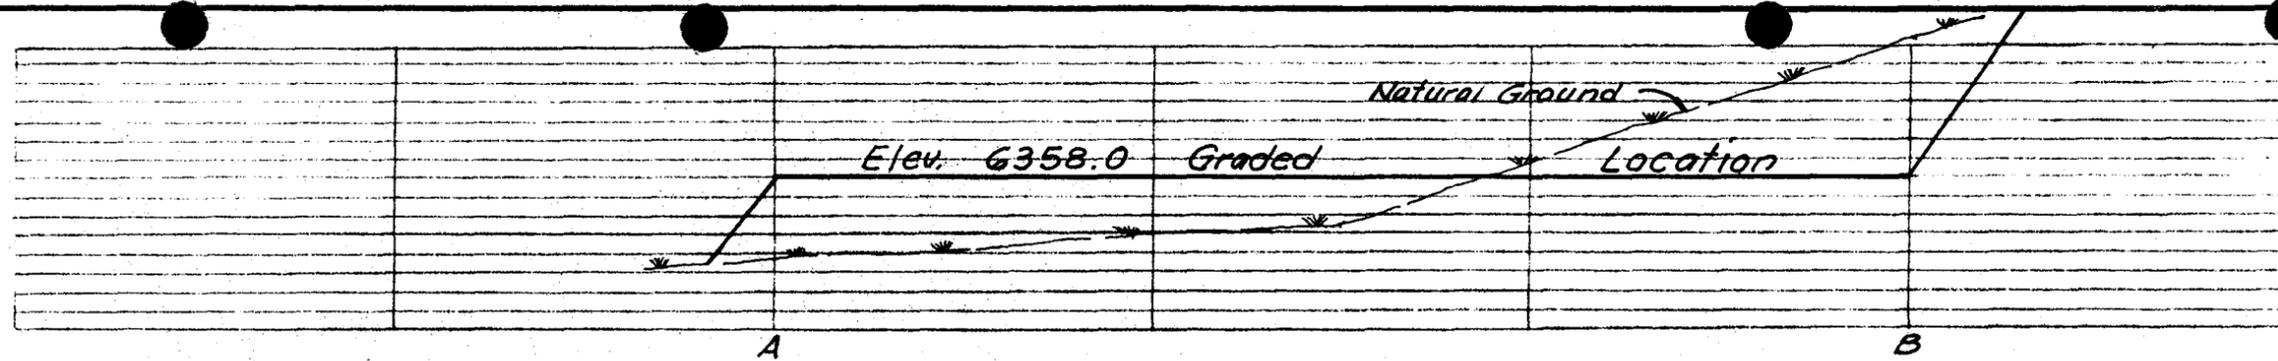


PROFILE SECTIONS - PROPOSED GRADE LOCATION

SCALE  
 HORIZ. 1" = 50'  
 VERT. 1" = 10'

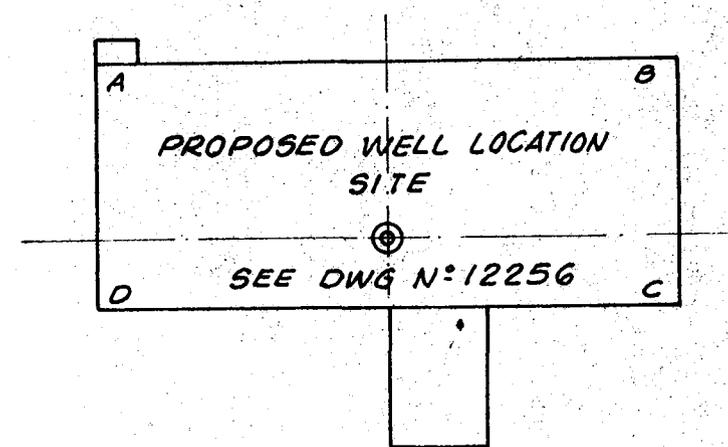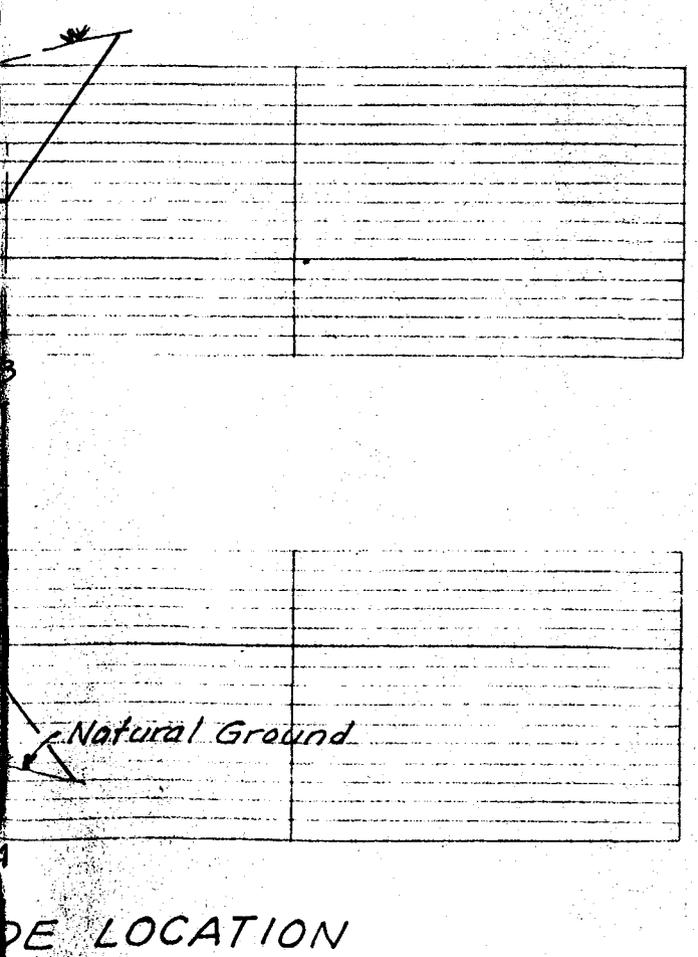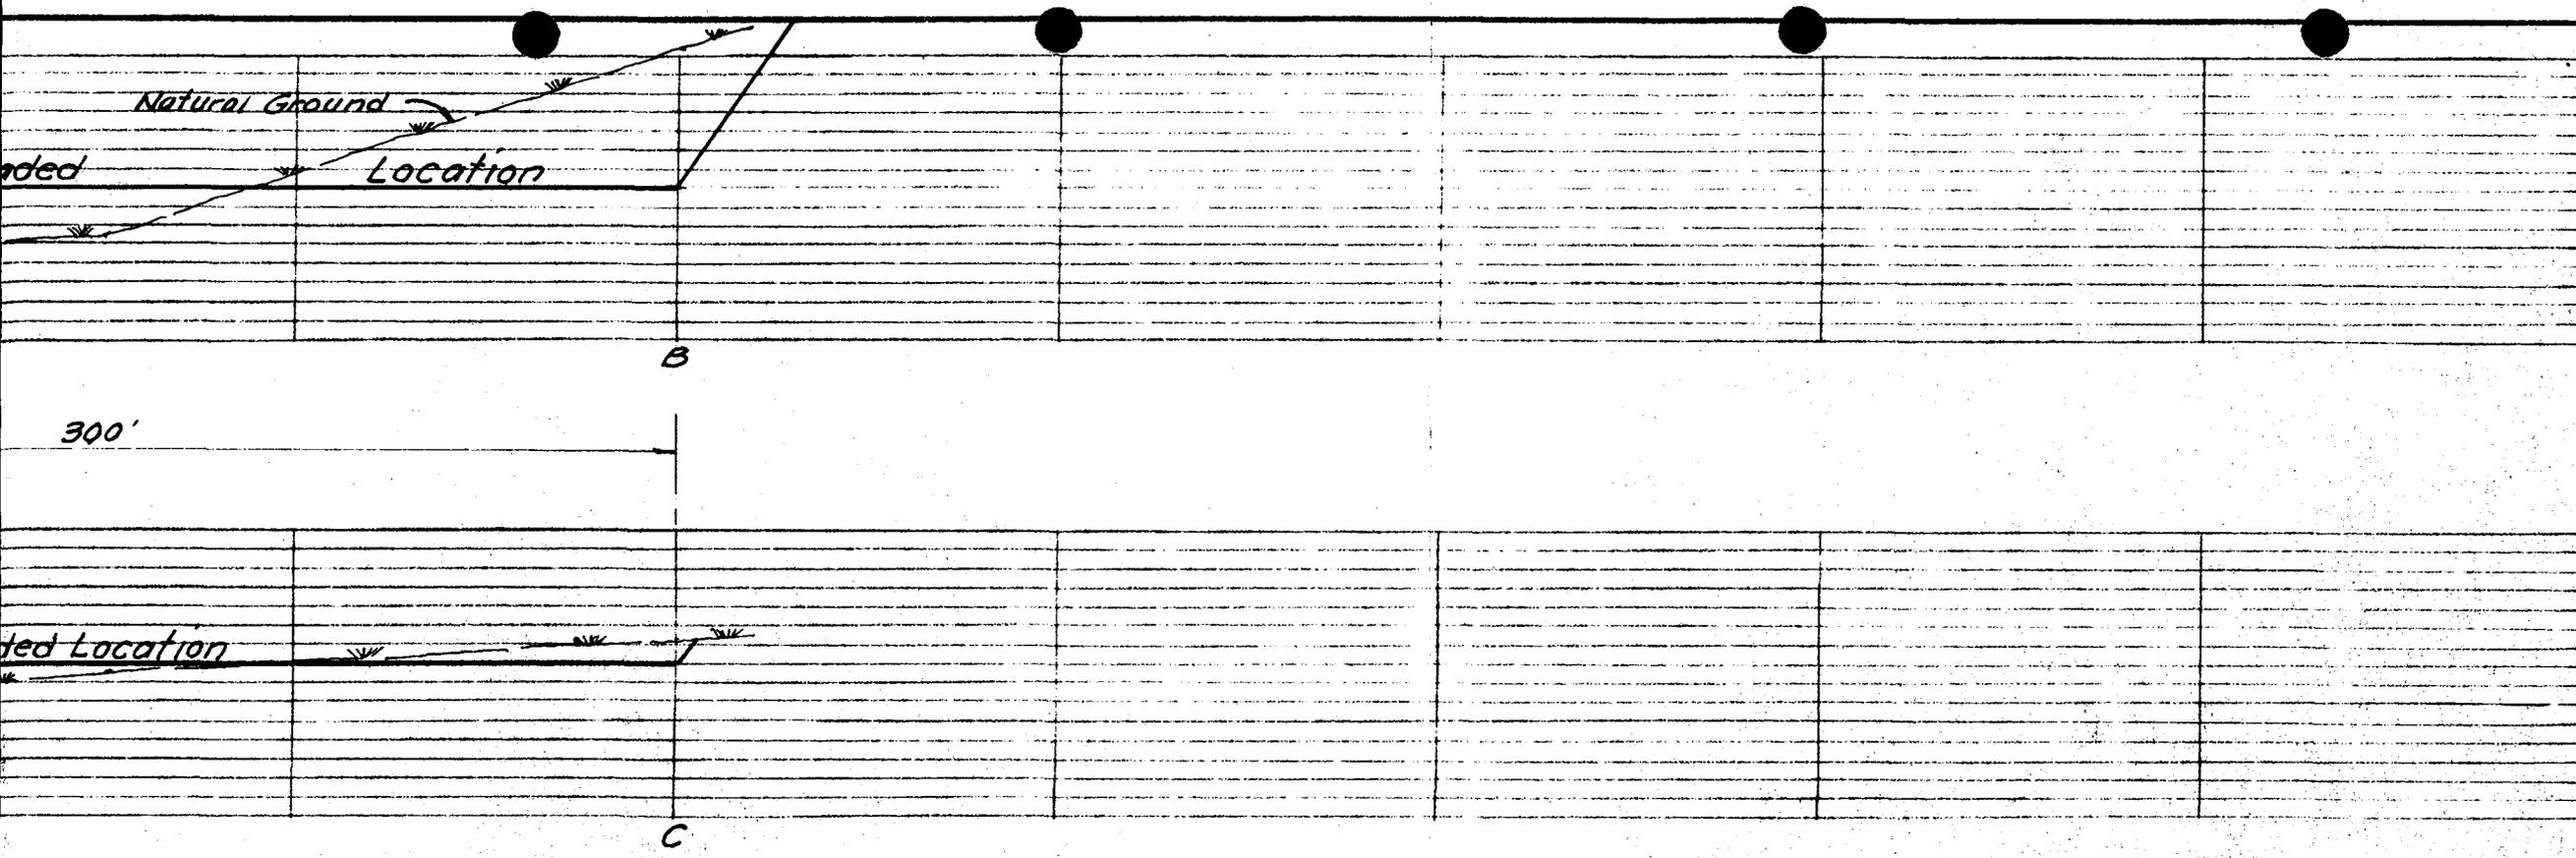

KEY MAP  
SCALE 1" = 100'

REVISIONS				MOUNTAIN FUEL SUPPLY COMPANY ROCK SPRINGS, WYOMING	
NO.	DESCRIPTION	DATE	BY	PROFILES FOR CLAY BASIN UNIT WELL N <sup>o</sup> 24 WELL LOCATION SITE	
				DRAWN: 9.21.76AHW SCALE: AS NOTED	
				CHECKED:	DRWG. NO. M12257
				APPROVED: RWH	2/2

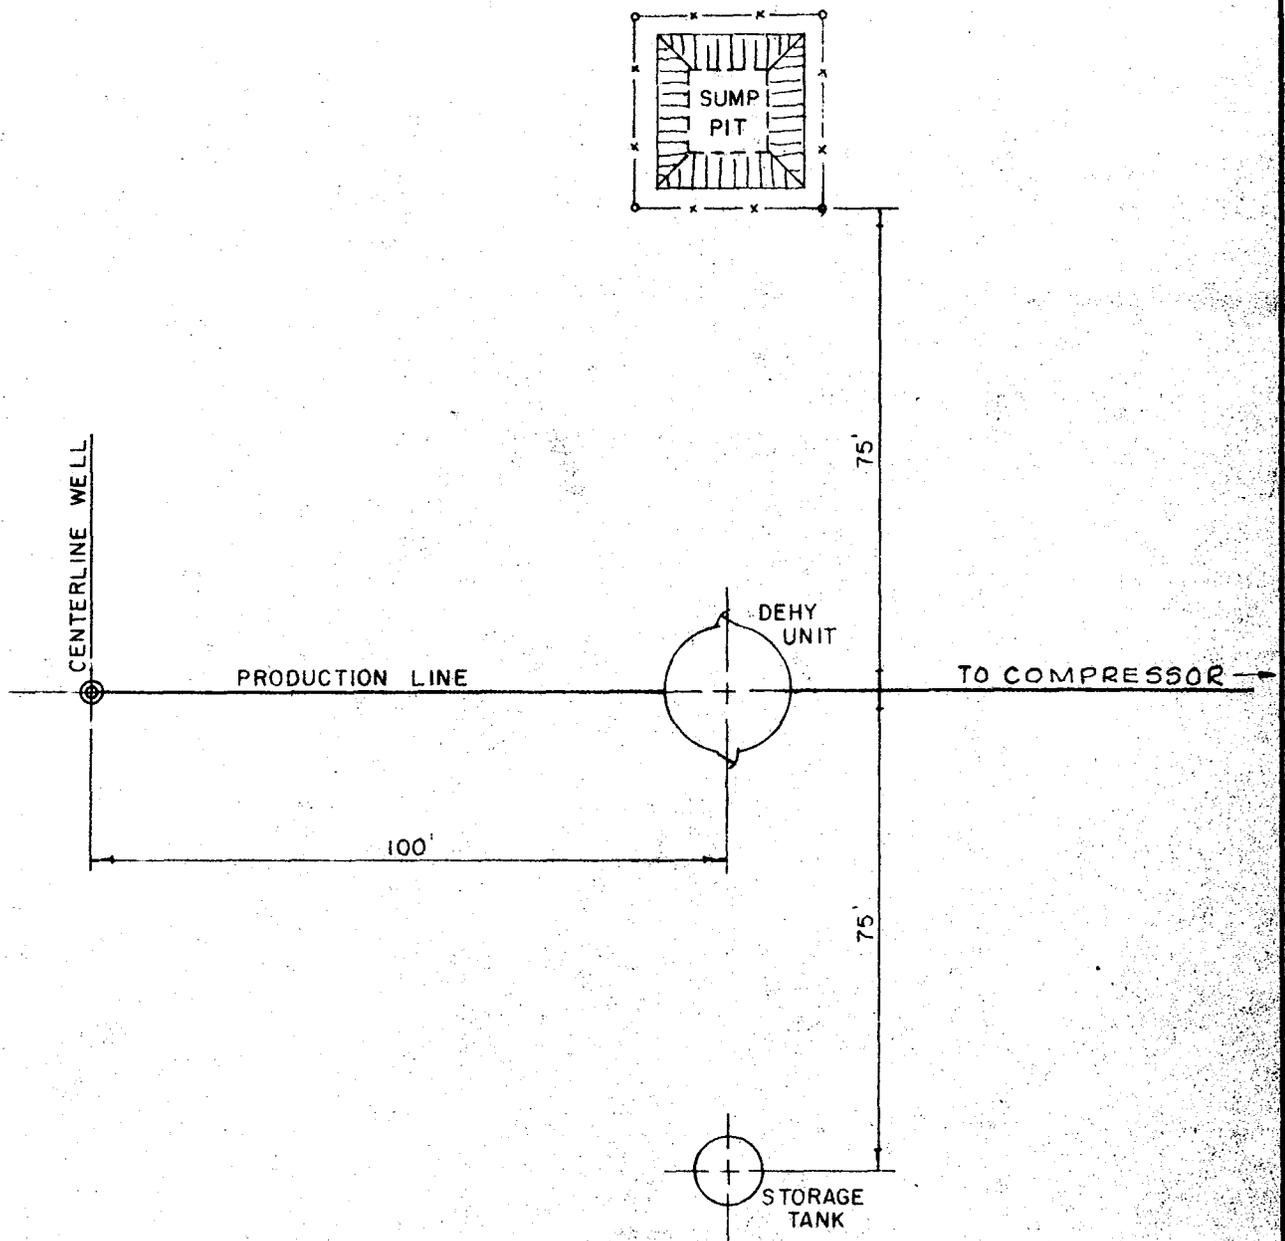

REVISIONS			
NO.	DESCRIPTION	DATE	BY

**MOUNTAIN FUEL**  
SUPPLY COMPANY  
ROCK SPRINGS, WYOMING

**TYPICAL PRODUCTION  
FACILITIES LAYOUT  
FOR  
CLAY BASIN UNIT WELL NO. 24**


DRAWN: 7/9/76 FJC		SCALE: NONE	
CHECKED:		ORWG. NO. M-12205	
APPROVED: <i>RWH</i>			

SPECIAL STACK REQUIREMENTS				

# MOUNTAIN FUEL SUPPLY COMPANY

## 2000 psi BLOWOUT PREVENTION EQUIPMENT

STANDARD STACK REQUIREMENTS				
No.	Item	Size	Qty	Notes
1	Artificially Stacked			
2	Flow Line			
3	Flow Line	2"		
4	Artificial Stacker			Special Stacking Equipment
5	Two Stacks of one each 100' long			
6	Artificial Stacker with 5" and 7" outlets			Special
7	As alternate to (6) Flow and Kill and Choke lines from outlets to the line			
8	Gate Valve		3/8"	
9	Flow Control Valve operating air		3/8"	
10	Choke Line	2"		
11	Gate Valve		2 1/2"	
12	Choke Valve		2 1/2"	
13	Gate Valve		2 1/2"	
14	Gate Valve		2 1/2"	
15	Gate Valve to Pools	2"		
16	Gate Valve			
17	Flow Line			
18	Emergency Pressure Gate			
19	Gate Valve			

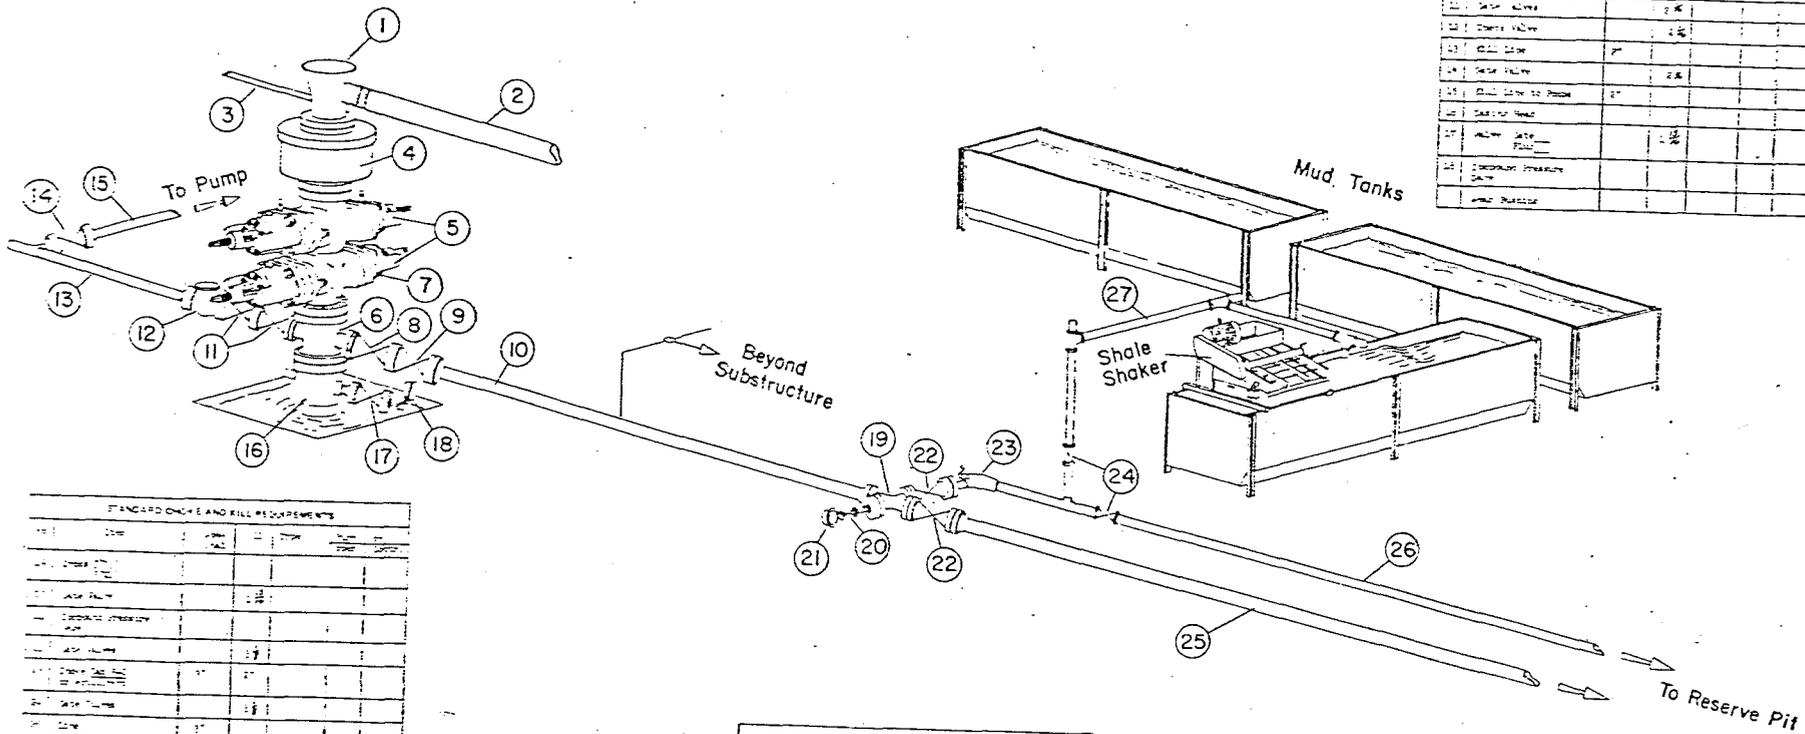

STANDARD CHOKE AND KILL REQUIREMENTS				
No.	Item	Size	Qty	Notes

SPECIAL CHOKE AND KILL REQUIREMENTS				

Well Name Clay Basin Unit Well No. 24

Location NW SW 21-3N-24E

Daggett County, Utah

<u>Wellhead Equipment</u>	<u>Size</u>	<u>Pressure Rating</u>	<u>Pressure Test</u>
Surface Casing Flange	<u>10"</u>	<u>3000</u>	<u>6000</u>
Casing Spool	<u>-</u>		
Tubing Spool	<u>10" x 6"</u>	<u>3000</u>	<u>6000</u>
Tubing Bonnet	<u>6" x 4"</u>	<u>3000</u>	<u>6000</u>

<u>Blow Out Preventers</u> (Top to Bottom)	<u>Size</u>	<u>PSI Rating</u>	<u>PSI Test</u>	<u>Bag</u>	<u>Rams</u>
	<u>10</u>	<u>3000</u>	<u>6000</u>	<u>X</u>	
	<u>10</u>	<u>3000</u>	<u>6000</u>		<u>4-1/2</u>
	<u>10</u>	<u>3000</u>	<u>6000</u>		<u>Blind</u>
<u>Gas Buster</u>	<u>X</u> Yes	<u>No</u>	<u>Degasser</u>	<u>Yes</u>	<u>X</u> No

Kill or Control Manifold

<u>2"</u> Size	<u>2000</u> Pressure Rating	<u>4000</u> Pressure Rating Test	<u>X</u> Hydraulic Valves
-------------------	--------------------------------	-------------------------------------	------------------------------

<u>Auxiliary Equipment</u>	<u>Kelly Cock</u>	<u>X</u> Yes	<u>No</u>
----------------------------	-------------------	-----------------	-----------

<u>Monitoring Equipment on Mud System</u>	<u>X</u> Yes	<u>No</u>
---	-----------------	-----------

<u>Full Opening Drill Pipe Stabbing Valve on Floor</u>	<u>X</u> Yes	<u>No</u>
--	-----------------	-----------

<u>Type of Drilling Fluid</u>	<u>X</u>	<u>Air</u>	<u>Gas</u>	<u>Oil Base Mud</u>
	<u>Water Base Mud</u>			

Anticipated Bottom Hole Pressure 500  
PSI

DEVELOPMENT PLAN FOR U.S.G.S. APPROVAL OF SURFACE USE  
MOUNTAIN FUEL SUPPLY COMPANY DRILLING WELLS

Well Name - Unit Well No. 24

Field or Area - Clay Basin

1. Existing Roads -

- A) Proposed well site as staked - Refer to well location plan M-12256 for location of well, access road and directional reference stakes.
- B) Route and distance from nearest town or locatable reference point to where well access route leaves main road - Refer to lateral map M-9030. From the Wyoming-Utah state line to Rock Springs, Wyoming is 50 miles.
- C) Access road to location - Refer to lateral map M-9030 and well site map M-12256 for access road from Wyoming-Utah state line to Clay Basin Unit No. 24.
- D) If exploratory well, all existing roads within a 3-mile radius of well site -
- E) If development well, all existing roads within a 1-mile radius - Refer to lateral map M-9030 for existing roads.
- F) Plans for improvement and/or maintenance of existing roads - No existing roads will be improved. All existing roads will be maintained as needed by Mountain Fuel equipment.

2. Planned Access Road -

- A) Width - 16' wide from shoulder to shoulder.
- B) Maximum grade - The maximum grade on the road is 8 percent.
- C) Turnouts - No turnouts will be constructed.
- D) Drainage design - A drainage ditch on the uphill side of the road will be constructed. It will be a minimum of one foot below the surface of the road. No water diversion ditches are anticipated.
- E) Location and size of culverts and description of major cuts and fills -
  - 1) For culvert size and location see drawing No. M-12256.
  - 2) No sidehill cuts will be made.
- F) Surfacing material - No surfacing material will be needed either on the road or location.
- G) Necessary gates, cattle guards or fence cuts - No cattle guards, gates or fence cuts are anticipated.
- H) New or reconstructed roads - The new access road is centerline flagged.

3. Location of Existing Wells -

- A) Water wells - No water well within a one mile radius.
- B) Abandoned wells - No abandoned well within a one mile radius.
- C) Temporarily abandoned wells - No temporarily abandoned wells within a one mile radius.

- D) Disposal wells - No disposal well within a one mile radius.
  - E) Drilling wells - No drilling wells within a one mile radius.
  - F) Producing wells - Clay Basin Unit Well Nos. 17, 13, 14, 19 and 22 are productive gas wells within a one mile radius.
  - G) Shut-in wells - No shut in wells within a one mile radius.
  - H) Injection wells - Clay Basin Unit Well Nos. 2, 3 and 5 are injection/withdrawal wells.
  - I) Monitoring or observation wells for other resources - No monitoring or observation wells within a one mile radius.
4. Location of Existing And/Or Proposed Facilities - Refer to map M-9030.
- A) 1) Tank batteries - No tank batteries within a one mile radius.
  - 2) Production facilities - Each productive gas well has its own production facility. Also, a compressor plant is located near Unit No. 3. Also, a compressor plant for injection is being built near Unit No. 3.
  - 3) Oil gathering lines - No oil gathering lines are located in the Clay Basin area.
  - 4) Gas gathering lines - Refer to area map M-9030. Lateral Nos. 55, 46, and 47 are buried gas lines. Lateral Nos. 270, 273, and 403 are surface gas lines.
  - 5) Injection lines - Several injection/withdrawal lines are located within a one mile radius. Refer to area map M-9030.
  - 6) Disposal lines - No disposal lines are located within a one mile radius.
- B) 1) Proposed location and attendant lines by flagging if off the well pad - The well will be used as a production well. A line will be constructed from the well to the compressor site as shown on drawing M-9030.
  - 2) Dimensions of facilities - Refer to drawing No. M-12205.
  - 3) Construction methods and materials - No construction materials are anticipated. The dirt work will be done with a backhoe; i.e., ditches, dehydration base, tank base, etc.
  - 4) Protective measures and devices to protect livestock and wildlife - The sump pit will be fenced as shown on drawing M-12205.
- C) Plans for rehabilitation of disturbed area no longer needed for operations after construction is completed - After construction is complete, areas of non-use will be restored and seeded.
5. Location and Type of Water Supply -
- A) Location of water - The water withdrawal point on Red Wash is located in the SW 1/4 of Section 22, T.12N., R.105W. of the 6th P.M., Sweetwater County, Wyoming.
  - B) Method of transporting water - Water will be hauled by tank truck from Red Creek to Unit Well No. 24. The well access road, as shown on drawing M-9030, will be used as the water haul road.

- C) Water well to be drilled on lease - No water well will be drilled.
6. Source of Construction Material -
- A) Information - No construction material will be used.
  - B) Identify if from Federal or Indian land -
  - C) Where materials are to be obtained and used -
  - D) Access roads crossing Federal or Indian lands -
7. Method for Handling Waste Disposal -
- A-D) Cuttings, drilling fluids, produced fluids, and sewage will be placed in the mud pit.
  - E) Garbage and other waste material will be placed in the burn pit.
  - F) After drilling operations have been completed, the location will be cleared of all litter and the trash will be burned in the burn pit. The burn pit will be covered over. The mud pit liquids will be pumped out and dumped on the existing roads. The mud pit will be covered over.
8. Ancillary Facilities - There now is a camp approximately 1/2 mile to the east with housing and general camp facilities including a landing strip. Water is piped to the camp from a spring to the west. See drawing M-9030.
9. Well Site Layout - See drawing Nos. M-12256 and M-12257.
10. Plans for Restoration of Surface -
- A) After drilling operations, the well site will be cleared and cleaned and the burn pit filled in. Should the well be a dry hole, the surface will be restored to the extent that it will blend in with the landscape. The reserve pit liquids will be pumped out and dumped on the existing roads.
  - B) Revegetation and rehabilitation of the location and access road will be done to comply with Bureau of Land Management recommendations.
  - C) Prior to rig release, pits will be fenced and so maintained until clean up.
  - D) If oil is in the mud pit, overhead flagging will be installed to keep birds out.
  - E) Clean up will begin within two months after drilling operations have been completed and the land will be restored at this time.
11. Other Information -
- A) The location lies on top of a ridge which runs northeast, more or less. The slope to the northwest is approximately 10%. The slope to the southeast is approximately 3%. The soil is sandy clay with gravel rock. The vegetation is sage brush, salt sage and native grass. The access road follows the ridge northeast.
  - B) The surface belongs to the U. S. Government.
  - C) Water can be located in Red Creek. The Clay Basin camp is occupied by Mountain Fuel personnel. No historical, archeological or cultural sites are in the area to my knowledge.
12. Lessee's or Operator's Representative -  
D. E. Dallas, Drilling Superintendent, P. O. Box 1129, Rock Springs, Wyoming 82901, telephone 307-362-5611.

13. Certification -

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and, that the work associated with the operations proposed herein will be performed by Mountain Fuel Supply Company and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

Date September 22, 1976

Name A. E. Dallas  
Title Drilling Superintendent

cdk

*Gas Storage*

DIVISION OF OIL, GAS, AND MINING

\*FILE NOTATIONS\*

Date: Oct. 18 -  
 Operator: Mt. Fuel Supply Co.  
 Well No: Clay Basin # 24-B  
 Location: Sec. 21 T. 3N R. 24E County: DeWitt

File Prepared  Entered on N.I.D.   
 Card Indexed  Completion Sheet

Checked By:

Administrative Assistant: *[Signature]*  
 Remarks:

Petroleum Engineer/Mined Land Coordinator: *[Signature]*  
 Remarks:

Director: *[Signature]*  
 Remarks:

Include Within Approval Letter:

Bond Required  Survey Plat Required   
 Order No.  Blowout Prevention Equipment   
 Rule C-3(c) Topographical exception/company owns or controls acreage within a 660' radius of proposed site   
 O.K. Rule C-3  O.K. In C. Basin Unit   
 Other:

*[Signature]*  
 Letter Written.

K

P

## INTEROFFICE COMMUNICATION

FROM T. M. Colson

Rock Springs, Wyoming  
CITY STATE

TO R. G. Myers

DATE November 18, 1976

SUBJECT Tentative Plan to Drill  
Unit Well No. 24  
Clay Basin Field

Attached for your information and files is a tentative plan to drill the above-captioned well. This plan was written in accordance with the Geologic Prognosis for this well prepared by D. L. Reese.

TMC/gm

Attachment

cc: R. D. Cash  
E. R. Keller (3)  
G. A. Peppinger (3)  
A. J. Marushack  
A. K. Zuehlsdorff  
D. E. Dallas  
A. J. Maser (3)  
J. E. Adney  
E. J. Widic  
B. M. Steigleder  
E. A. Farmer  
U.S.G.S.  
State   
Paul Zubatch  
P. E. Files (4)



From: C. R. Owen  
To: T. M. Colson

Rock Springs, Wyoming  
November 18, 1976

Tentative Plan to Drill  
Unit Well No. 24  
Clay Basin Field

This well will be drilled to total depth by \_\_\_\_\_ Drilling Company. One work order has been originated for the drilling and completion of this well, namely \_\_\_\_\_, Drill Unit Well No. 24, Clay Basin Field, located in the NW SW Sec. 21, T. 3 N., R. 24 E., Daggett County, Utah. An 8-3/4-inch hole will be drilled to a total depth of 5790 feet and 7-inch O.D. casing run. It is planned to complete the well as a gas storage well in the Dakota formation. 100 feet of cores will be cut, starting at a point 50 feet from the bottom of the Mowry and through 50 feet of the Dakota storage sand. Surface elevation is at 6358 feet.

1. Drill 13-3/4-inch hole to approximately 330 feet KBM.
2. Run and cement approximately 300 feet of 9-5/8-inch O.D., 36-pound, K-55, 8 round thread, ST&C casing. The casing will be cemented by Halliburton with 323 sacks of regular Type "G" cement with 3 percent calcium chloride, which represents theoretical requirements plus 100 percent excess cement for 9-5/8-inch O.D. casing in 13-3/4-inch hole with cement returned to surface. Plan on leaving a 10 foot cement plug in the bottom of the casing after displacement is completed. Floating equipment will consist of a Baker guide shoe. The top and bottom of all casing collars will be spot welded in the field and the guide shoe will be spot welded to the shoe joint in the Rock Springs Machine Shop. The bottom of the surface casing should be landed in such a manner that the top of the 10-inch 3000 psi casing flange will be at ground level. A cellar three feet deep will be required. Prior to cementing, circulate 50 barrels of mud. Capacity of the 9-5/8-inch O.D. casing is 24 barrels.
3. After a WOC time of 8 hours, remove the landing joint and wash off casing collar. Install a NSCo. Type "B" 10-inch 3000 psi regular duty casing flange tapped for 9-5/8-inch O.D. casing. Install a 2-inch extra heavy nipple, 6-inches long, and

a Nordstrom Figure 824 (800 psi WOG, 1600 psi test) valve on one side outlet of the casing flange and a 2-inch extra heavy bull plug in the opposite side. Install a 10-inch 3000 psi double gate hydraulically operated blowout preventer with blind rams in the bottom and 4-1/2-inch rams in the top and finish nipping up. After a WOC time of 12 hours, pressure test surface casing, all preventer rams, and Kelly-cock to 1000 psi for 15 minutes using rig pump and drilling mud. The burst pressure rating for 9-5/8-inch O.D., 36-pound, K-55, 8 round thread, ST&C casing is 3520 psi.

4. Drill 8-3/4-inch hole to the total depth of 5790 feet or to such depth as the Geological Department may recommend. The mud will consist of 2 percent potassium chloride water to 4500 feet. Mud up with the potassium Dexdrid Drispac system at this point to allow a 3 cc. water loss at 5540 feet when the coring begins. The 3 cc. water loss will be maintained from the coring point to total depth at 5790 feet. If lost circulation is encountered only acid soluble lost circulation material will be used. A mud cleaner will be used from surface to total depth to remove undesirable solids from the mud system and to keep the mud weight to a minimum. A Company Geologist will be on location to check cutting samples; 10 foot samples from 5100 feet to total depth. 100 feet of cores will be cut from approximately 5540 feet to 5640 feet (50 foot Mowry core, 50 foot Dakota core). Anticipated tops are as follows:

	<u>Approximate Depth</u> <u>(Feet KBM)</u>
Mancos	Surface
Frontier	5,240
Mowry	5,440
Dakota	5,590
Total Depth	5,790

5. Run a dual induction laterolog (2-inch linear scale and 5-inch logarithmic scale) and a compensated density/gamma ray/caliper from total depth at 5790 feet to 3790 feet. The 2000 feet logged represents the minimum footage for each log.
6. Assuming a gas storage zone of good quality is present as indicated by log analysis, go into hole with 8-3/4-inch bit and drill pipe to total depth to condition mud prior to running production casing. Pull bit laying down drill pipe and drill collars.
7. Run 7-inch O.D. casing as outlined in Item No. I, General Information, through the deepest producing zone as indicated by log analysis. A Baker 7-inch O.D., 8 round thread, Type G circulating differential fillup collar and guide shoe will be run as floating equipment. Rig up Halliburton and cement casing with 50-50 Pozmix "A" cement. Bring cement top behind the 7-inch O.D. casing above the uppermost producing zone as indicated by log analysis. Circulate 150 barrels of drilling mud prior to beginning cementing operations. Capacity of the 7-inch O.D. casing is approximately 228 barrels. Cement requirements will be based on actual hole size as determined by the caliper portion of the formation density log. Rotate casing while circulating, mixing, and displacing cement. Displace cement with water. Bump plug with 2500 psi and hold for 15 minutes to pressure test casing. Minimum burst pressure of the 7-inch O.D., 23-pound, K-55 casing is 4360 psi.
8. Immediately after cementing operations are completed, land the 7-inch O.D. casing with full weight of casing on slips in the 10-inch 3000 psi casing flange and record indicator weight. Install NSCo. Type B 10-inch 3000 psi by 6-inch 3000 psi

tubing spool. Pressure test primary and secondary seals to 2500 psi for 5 minutes. Minimum collapse pressure for 7-inch O.D., 23-pound, K-55, 8 round thread, LT&C casing is 3280 psi. Install a steel plate on the 6-inch 3000 psi tubing spool flange.

9. Release drilling rig and move off location.
10. Move in and rig up a completion rig.
11. Install a 6-inch 5000 psi hydraulically operated double gate preventer with blind rams on bottom and 4-1/2-inch tubing rams on top.
12. After a WOC time of at least 50 hours, rig up Dresser Atlas and run bond log and perforating formation control log from plugged back depth to top of cement behind the 7-inch O.D. casing.
13. After a WOC time of at least 56 hours, pick up and run a 6-1/4-inch bit on 4-1/2-inch O.D., 11.6-pound, J-55, 8 round thread, LT&C tubing to check plugged back depth. Rig up and displace water out of hole with drip oil. Pull tubing out of hole and stand in derrick.
14. Rig up Dresser Atlas and run a casing potential profile log from total depth to the bottom of the surface casing at 300 feet KB.
15. Rig up Dresser Atlas perforating truck and perforate the Dakota storage sand with 2 HPF jumbo jet shots. The interval to be perforated will be chosen after the open hole logging has been reviewed and evaluated.
16. Rig up Dresser Atlas and run a Baker Model FB-1 (size 87-40) as follows:
  - Baker Model FB-1 (4.0-inch I.D. through packer)
  - 6 foot Baker millout extension (4.0-inch I.D.).
  - 10 foot Baker seal bore protector (4.0-inch I.D.) changeover.

6 feet 3-1/2-inch O.D., 9.2-pound, J-55, 8 round EUE pup joint.

Baker Model "F" non-ported seating nipple (size 2.81).

6 feet 3-1/2-inch O.D., 9.2-pound, J-55, 8 round EUE pup joint.

Baker Model "R" non-ported no-go seating nipple (size 2.75).

Set packer so that the bottom of the assembly is 30 feet above the perforations.

Perforations will be chosen after the open-hole logging is completed.

17. Pick up a Baker locator seal assembly and a Baker Model "L" sliding sleeve and run tubing as follows:

1 NSCo. H-1 tubing hanger tapped 4-1/2-inch O.D., 8 round thread, LT&C, top and bottom.

4-1/2-inch O.D., 11.6-pound, J-55, 8 round thread, LT&C pup joints as required to space out.

Approximately 155 joints 4-1/2-inch O.D., 11.6-pound, J-55, 8 round thread, LT&C tubing.

Baker Model "L" 4-1/2-inch O.D. sliding sleeve (size 3.812), in open position.

1 6 foot 4-1/2-inch O.D., 11.6-pound, J-55 pup joint.

Baker Model "G" locator seal assembly with 10 feet of seal extensions (I.D. 3.0-inches).

Land tubing in packer with 10,000 pounds compression. Space out and land in wellhead.

18. Install upper portion of wellhead.

19. Swab fluid out of wellbore. Run a short production test.

GENERAL INFORMATION

I. The following tubular goods have been assigned to the well.

<u>Description</u>	<u>Approximate Gross Measurement (feet)</u>	<u>Availability</u>
	<u>Surface Casing</u>	
9-5/8-inch O.D., 36-pound, H-40, 8 round thread, ST&C casing	330	Warehouse Stock
	<u>Production Casing</u>	
7-inch O.D., 23-pound, K-55, 8 round thread, LT&C casing (Bottom 400 feet will be rough coated)	6,000	To be purchased
	<u>Production Tubing</u>	
4-1/2-inch O.D., 11.6-pound, J-55, 8 round thread, LT&C tubing	6,200	To be purchased

II. All ram type preventers will have hand wheels installed and operative at the time the preventers are installed.

III. Well responsibility - D. L. Reese

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUBMIT IN TRIPPLICATE\*  
(Other instructions on re-  
verse side)

Form approved.  
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.  
SLC 045051-b

6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
-

7. UNIT AGREEMENT NAME  
Clay Basin Gas Storage Agreement

8. FARM OR LEASE NAME  
Unit Well

9. WELL NO.  
24-S

10. FIELD AND POOL, OR WILDCAT  
Clay Basin Gas Storage


11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
NW SW 21-3N-24E

12. COUNTY OR PARISH  
Daggett

13. STATE  
Utah

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT" for such proposals.)

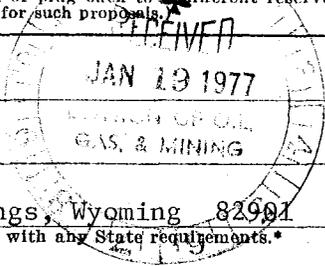

1. OIL WELL  GAS WELL  OTHER  Gas Storage

2. NAME OF OPERATOR  
Mountain Fuel Supply Company

3. ADDRESS OF OPERATOR  
P. O. Box 1129, Rock Springs, Wyoming 82901

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\*  
See also space 17 below.)  
At surface  
2519' FSL, 771' FWL NW SW

14. PERMIT NO.  
API No.: 43-009-30015

15. ELEVATIONS (Show whether DF, RT, GR, etc.)  
GR 6358'

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF <input type="checkbox"/>	PULL OR ALTER CASING <input type="checkbox"/>	WATER SHUT-OFF <input type="checkbox"/>	REPAIRING WELL <input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	MULTIPLE COMPLETE <input type="checkbox"/>	FRACTURE TREATMENT <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	ABANDON* <input type="checkbox"/>	SHOOTING OR ACIDIZING <input type="checkbox"/>	ABANDONMENT* <input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	(Other) Supplementary history <input checked="" type="checkbox"/>	

(Other) \_\_\_\_\_  
(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*  
Depth 312', spudded 1-15-77, ran and cemented 9-5/8" casing, now nipling up.

18. I hereby certify that the foregoing is true and correct  
SIGNED R.H. Myers TITLE Manager, Drilling and Petroleum Engineering DATE Jan. 17, 1977

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE\*  
(Other instructions on reverse side)

Form approved  
Budget Bureau No. 42 R1424.

5. LEASE DESIGNATION AND SERIAL NO.

SLC 045051-b

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL  GAS WELL  OTHER  Gas Storage

2. NAME OF OPERATOR Mountain Fuel Supply Company

3. ADDRESS OF OPERATOR P. O. Box 1129, Rock Springs, Wyoming 82901

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\* See also space 17 below.)  
At surface

2519' FSL, 771' FWL NW SW

14. PERMIT NO.  
API No.: 43-009-30015

15. ELEVATIONS (Show whether DF, RT, GR, etc.)  
KB 6380.80' GR 6358'

7. UNIT AGREEMENT NAME  
Clay Basin Gas Storage Agreement

8. FARM OR LEASE NAME  
Unit Well

9. WELL NO.  
24-S


10. FIELD AND POOL, OR WILDCAT  
Clay Basin Gas Storage

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

NW SW 21-3N-24E

12. COUNTY OR PARISH  
Daggett

13. STATE  
Utah

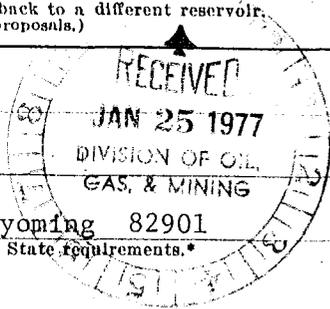

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

WATER SHUT-OFF

REPAIRING WELL

FRACTURE TREAT

MULTIPLE COMPLETE

FRACTURE TREATMENT

ALTERING CASING

SHOOT OR ACIDIZE

ABANDON\*

SHOOTING OR ACIDIZING

ABANDONMENT\*

REPAIR WELL

CHANGE PLANS

(Other) Supplementary history

(Other)

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Depth 3935', set 9-5/8", 36#, K-55 casing at 304.67' with 165 sacks of cement, drilling.

18. I hereby certify that the foregoing is true and correct

SIGNED R. L. Meyer

TITLE Manager, Drilling and Petroleum Engineering

DATE Jan. 24, 1977

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

TITLE \_\_\_\_\_

DATE \_\_\_\_\_

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE\*  
(Other instructions on re-  
verse side)

Form approved.  
Budget Bureau No. 42-R1424

5. LEASE DESIGNATION AND SERIAL NO.

SLC 045051-b

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT--" for such proposals.)

1. OIL WELL  GAS WELL  OTHER  Gas Storage

2. NAME OF OPERATOR  
Mountain Fuel Resources, Inc.

3. ADDRESS OF OPERATOR  
P. O. Box 1129, Rock Springs, Wyoming 82901

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\*  
See also space 17 below.)  
At surface

2519' FSL, 771' FWL NW SW

14. PERMIT NO. API No.: 43-009-30015  
15. ELEVATIONS (Show whether DF, RT, GR, etc.) KB 6380.80' GR 6358'

7. UNIT AGREEMENT NAME  
Clay Basin Gas Storage Agreement

8. FARM OR LEASE NAME  
Unit Well


9. WELL NO.  
24-S

10. FIELD AND POOL, OR WILDCAT  
Clay Basin Gas Storage

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

NW SW 21-3N-24E

12. COUNTY OR PARISH Daggett  
13. STATE Utah

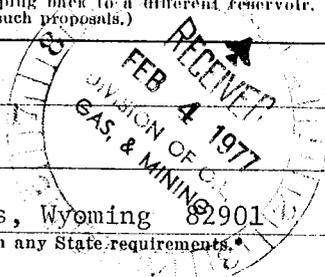

10. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF   
FRACTURE TREAT   
SHOOT OR ACIDIZE   
REPAIR WELL   
(Other)   
PULL OR ALTER CASING   
MULTIPLE COMPLETE   
ABANDON\*   
CHANGE PLANS

WATER SHUT-OFF   
FRACTURE TREATMENT   
SHOOTING OR ACIDIZING   
(Other) Supplementary history   
(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Depth 5655', drilling.

18. I hereby certify that the foregoing is true and correct

SIGNED R. E. Meyer

TITLE Manager, Drilling and Petroleum Engineering

DATE Feb. 1, 1977

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

TITLE \_\_\_\_\_

DATE \_\_\_\_\_

**UNITED STATES**  
**DEPARTMENT OF THE INTERIOR**  
**GEOLOGICAL SURVEY**

SUBMIT IN TRIPPLICATE\*  
 (Other instructions on re-  
 verse side)

Form approved.  
 Budget Bureau No. 42-R1424.

**SUNDRY NOTICES AND REPORTS ON WELLS**  
 (Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
 Use "APPLICATION FOR PERMIT—" for such proposals.)

1.  OIL WELL  GAS WELL  OTHER Gas Storage

2. NAME OF OPERATOR  
Mountain Fuel Resources, Inc.

3. ADDRESS OF OPERATOR  
P. O. Box 1129, Rock Springs, Wyoming 82901

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\*  
See also space 17 below.)  
At surface  
2519' FSL, 771' FWL NW SW

14. PERMIT NO. API No.: 43-009-30015 15. ELEVATIONS (Show whether DF, RT, GR, etc.)  
KB 6380.80' GR 6358'

5. LEASE DESIGNATION AND SERIAL NO.  
SLC 045051-b

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME  
Clay Basin Gas Storage Agreement

8. FARM OR LEASE NAME  
Unit Well

9. WELL NO.  
24-S

10. FIELD AND POOL, OR WILDCAT  
Clay Basin Gas Storage

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
NW SW 21-3N-24E

12. COUNTY OR PARISH Daggett 13. STATE Utah

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF <input type="checkbox"/>	PULL OR ALTER CASING <input type="checkbox"/>	WATER SHUT-OFF <input type="checkbox"/>	REPAIRING WELL <input type="checkbox"/>
FRACTURE TREAT. <input type="checkbox"/>	MULTIPLE COMPLETE <input type="checkbox"/>	FRACTURE TREATMENT <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	ABANDON* <input type="checkbox"/>	SHOOTING OR ACIDIZING <input type="checkbox"/>	ABANDONMENT* <input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	(Other) <u>Supplementary history</u> <input checked="" type="checkbox"/>	
(Other) <input type="checkbox"/>		(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)	

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

TD 5830', PBD 5753', landed 7", 23#, K-55 casing at 5813.28' and set with 440 sacks of cement.



18. I hereby certify that the foregoing is true and correct.

SIGNED R. D. Meyer TITLE Manager, Drilling and Petroleum Engineering DATE Feb. 15, 1977

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:

K P

## INTEROFFICE COMMUNICATION

FROM T. M. Colson

Rock Springs, Wyoming  
CITY STATE

TO R. G. Myers

DATE March 4, 1977

SUBJECT Tentative Plan to Complete  
Unit Well No. 24  
Clay Basin Field

Attached for your information and files is a tentative plan to complete the above-captioned well.

TMC/gm

Attachment

cc: R. D. Cash  
E. R. Keller (3)  
G. A. Peppinger (3)  
A. J. Marushack  
A. K. Zuehlsdorff  
D. E. Dallas (2)  
G. C. Nelson (2)  
J. E. Adney  
E. J. Widic  
E. A. Farmer  
D. L. Reese  
U.S.G.S.  
State   
B. M. Steigleder  
P. E. Files (4)



From: R. L. Rasmussen

Rock Springs, Wyoming

To: T. M. Colson

March 4, 1977

Tentative Plan to Complete  
Unit Well No. 24  
Clay Basin Field

The above well was drilled to a total depth of 5830 feet KBM on February 4, 1977 by Mountain Fuel Resources. The well was drilled as a gas storage well in the Dakota formation. The following is a tentative plan to complete the above-captioned well.

NOTE: KB is 22.80 feet above ground level.

1. Move in and rig up a completion rig.
2. Install a 6-inch 5000 psi hydraulically operated double gate BOP with blind rams in bottom and 2-3/8-inch tubing rams on top.
3. After a WOC time of at least 50 hours, rig up Dresser Atlas and run cement bond log and perforating formation control log from plugged back depth to top of cement behind the 7-inch O.D. casing.
4. After a WOC time of at least 56 hours, pick up and run a 6-1/4-inch bit and casing scraper dressed for 7-inch O.D., 23-pound casing on 2-3/8-inch O.D., 4.6-pound, J-55 tubing to plug back depth. Rig up and displace water out of hole with drip oil. Approximately 230 barrels of drip oil will be required. Pull and lay down tubing, casing scraper, and 6-1/4-inch bit. Install 4-1/2-inch tubing rams.
5. Rig up Dresser Atlas perforating truck and perforate the Dakota storage sand with two Jumbo Jet shots per foot as follows:

5607 feet to 5625 feet KBM  
5631 feet to 5648 feet KBM

Measurements are from the Schlumberger formation density log dated February 2, 1977. Depths must be correlated with the Dresser Atlas cement bond log dated February 8, 1977.

6. Run a Baker Model FB-1 (size 87-40) packer as follows:
  - 1 Baker Model FB-1 packer (4.0-inch I.D. through packer).
  - 6 foot Baker millout extension (4.0-inch I.D.).
  - 10 foot Baker seal bore protector (4.0-inch I.D.) changeover.
  - 6 foot 3-1/2-inch O.D., 9.2-pound, J-55, 8 round thread, EUE pup joint.
  - 1 Baker Model "F" non-ported seating nipple (size 2.81).
  - 6 foot 3-1/2-inch O.D., 9.2-pound, J-55, 8 round thread, EUE pup joint.
  - 1 Baker Model "R" non-ported no-go seating nipple (size 2.75).

Set packer so that the bottom of the assembly is 30 feet above the perforations.
7. Pick up a Baker locator seal assembly and a Baker Model "L" sliding sleeve and run tubing as follows:
  - 1 NSCo. H-1 tubing hanger tapped 4-1/2-inch O.D., 8 round thread, LT&C, top and bottom.
  - 4-1/2-inch O.D., 11.6-pound, J-55, 8 round thread, LT&C pup joints as required to space out.
  - Approximately 155 joints 4-1/2-inch O.D., 11.6-pound, J-55, 8 round thread, LT&C tubing.
  - Baker Model "L" 4-1/2-inch O.D. sliding sleeve (size 3.812), in open position.
  - 1 6 foot 4-1/2-inch O.D., 11.6-pound, J-55 pup joint.
  - Baker Model "G" locator seal assembly with 10 feet of seal extensions (I.D. 3.0-inches).

Land tubing in packer with 10,000 pounds compression. Space out and land in wellhead.
8. Install upper portion of wellhead.
9. Swab fluid out of wellbore. Run a short production test.

Present Status of Well


UNIT WELL 24-A

Clay Basin Field

2-9-77/225

Not drawn  
to scale

Drilled by rotary by MT FUEL  
2-5-77.

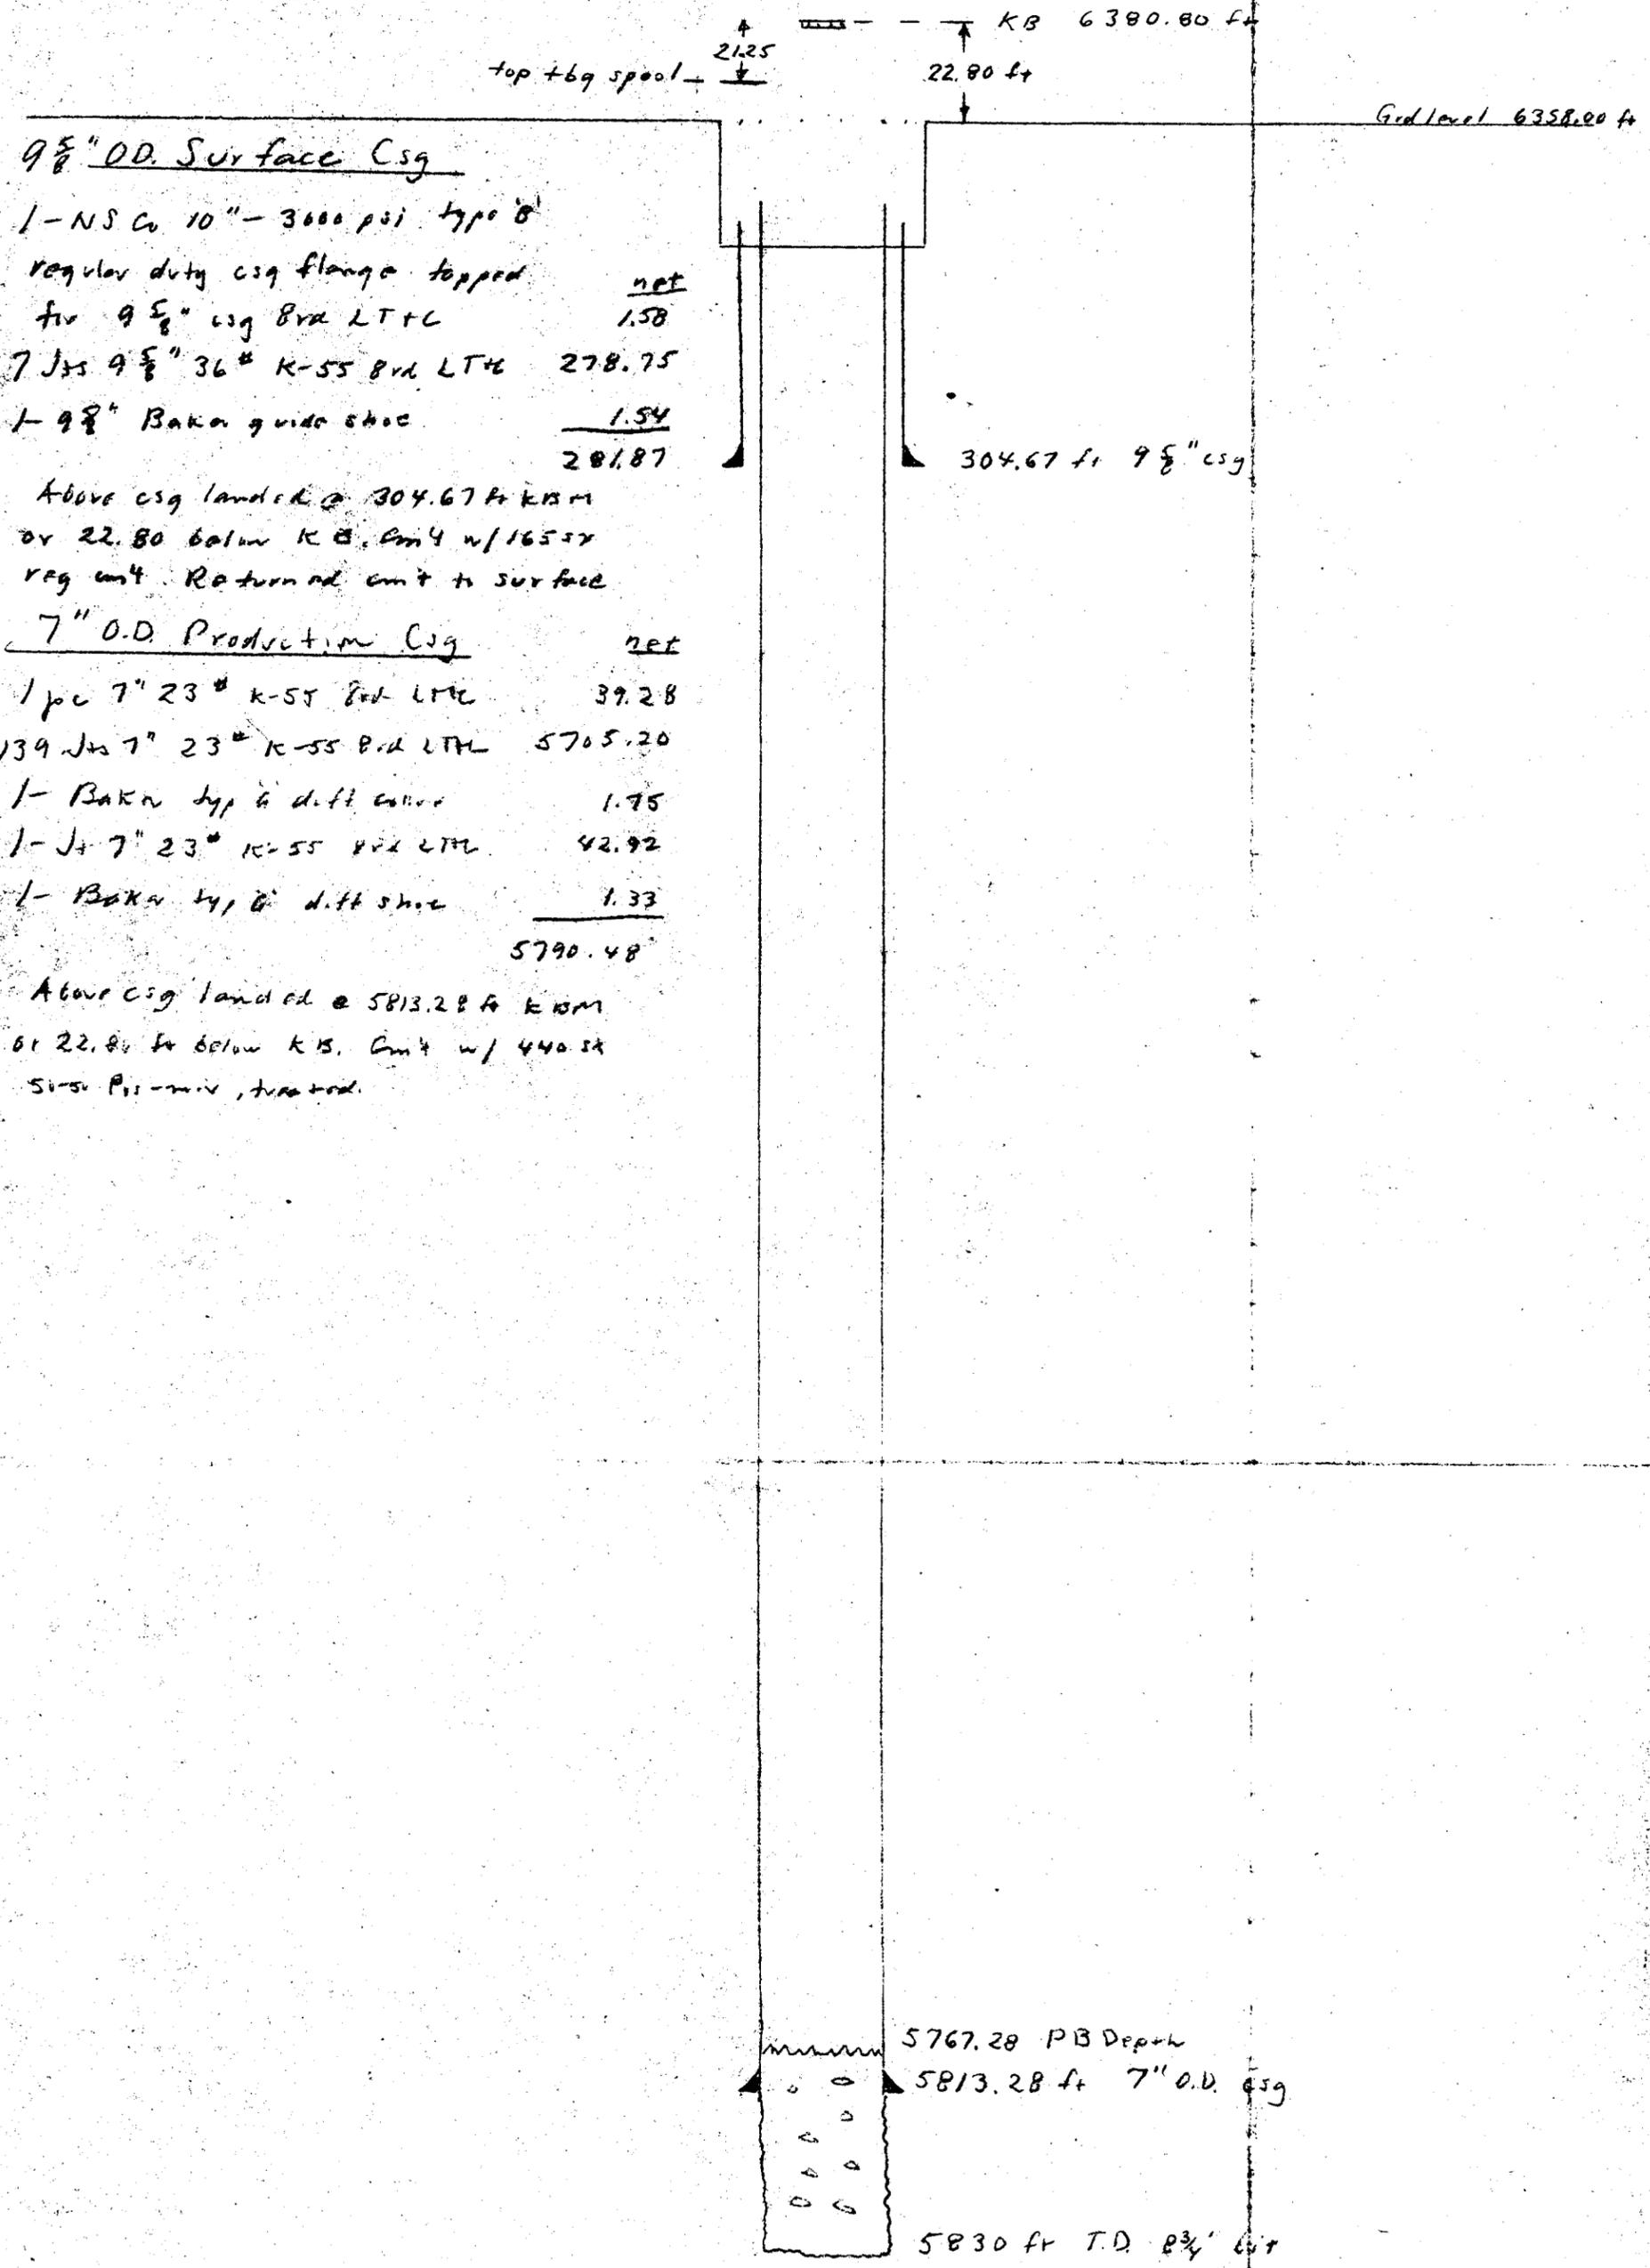

9 5/8" O.D. Surface Csg  
 1- NSC 10" - 3000 psi type B  
 regular duty csg flange topped  
 for 9 5/8" csg BVA LTHC net 1.58  
 7 Jts 9 5/8" 36# K-55 BVA LTHC 278.75  
 1- 9 5/8" Baker guide shoe 1.54  
 281.87

Above csg landed @ 304.67 ft KBM  
 or 22.80 below KB. Unit w/ 16557  
 reg unit. Returned unit to surface

7" O.D. Production Csg net  
 1 pc 7" 23# K-55 BVA LTHC 39.28  
 139 Jts 7" 23# K-55 BVA LTHC 5705.20  
 1- Baker type A diff collar 1.75  
 1- Jt 7" 23# K-55 BVA LTHC 42.92  
 1- Baker type A diff shoe 1.33  
 5790.48

Above csg landed @ 5813.28 ft KBM  
 or 22.80 ft below KB. Unit w/ 440 lb  
 SWS P11-mix, tapered.

5767.28 PB Depth  
 5813.28 ft 7" O.D. csg  
 5830 ft T.D. 2 3/4" bit

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE\*  
(Other instructions on reverse side)

Form approved.  
Budget Bureau No. 42-R1424

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use "APPLICATION FOR PERMIT—" for such proposals.)

<p>1. OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input checked="" type="checkbox"/> <b>Gas Storage</b></p> <p>2. NAME OF OPERATOR <b>Mountain Fuel Resources, Inc.</b></p> <p>3. ADDRESS OF OPERATOR <b>P. O. Box 1129, Rock Springs, Wyoming 82901</b></p> <p>4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface <b>2519' FSL, 771' FWL NW SW</b></p> <p>14. PERMIT NO. <b>API No.: 43-009-30015</b></p>	<p>5. LEASE DESIGNATION AND SERIAL NO. <b>SLC 045051-b</b></p> <p>6. IF INDIAN, ALLOTTEE OR TRIBE NAME -</p> <p>7. UNIT AGREEMENT NAME <b>Clay Basin Gas Storage Agreement</b></p> <p>8. FARM OR LEASE NAME <b>Unit Well</b></p> <p>9. WELL NO. <b>24-S</b></p> <p>10. FIELD AND POOL, OR WILDCAT <b>Clay Basin Gas Storage</b></p> <p>11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA <b>NW SW 21-3N-24E</b></p> <p>12. COUNTY OR PARISH <b>Daggett</b></p> <p>13. STATE <b>Utah</b></p>
<p>15. ELEVATIONS (Show whether DF, RT, GR, etc.) <b>KB 6380.80' GR 6358'</b></p>	

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF <input type="checkbox"/>	PULL OR ALTER CASING <input type="checkbox"/>	WATER SHUT-OFF <input type="checkbox"/>	REPAIRING WELL <input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	MULTIPLE COMPLETE <input type="checkbox"/>	FRACTURE TREATMENT <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	ABANDON* <input type="checkbox"/>	SHOOTING OR ACIDIZING <input type="checkbox"/>	ABANDONMENT* <input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	(Other) <u>Supplementary history</u> <input checked="" type="checkbox"/>	

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

TD 5830', PBD 5753', perforated from 5608' to 5626' and from 5632' to 5647' with 2 jet shots per foot, set packer at 5548', landed 4-1/2" tubing at 5548.00', swabbed, began making gas and condensate, rig released March 5, 1977. Final Report.



18. I hereby certify that the foregoing is true and correct

SIGNED R. G. Meyer TITLE Manager, Drilling and Petroleum Engineering DATE March 9, 1977

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUBMIT IN DUPLICATE\*

(See other instructions on reverse side)

Form approved.  
Budget Bureau No. 42-R355.5.

12

WELL COMPLETION OR RECOMPLETION REPORT AND LOG \*

1a. TYPE OF WELL: OIL WELL  GAS WELL  DRY  Other Gas Storage

b. TYPE OF COMPLETION: NEW WELL  WORK OVER  DEEP-EN  PLUG BACK  DIFF. RESVR.  Other RECEIVED MAR 15 1977

2. NAME OF OPERATOR  
Mountain Fuel Resources, Inc.

3. ADDRESS OF OPERATOR  
P. O. Box 1129, Rock Springs, Wyoming 82901

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)\*  
At surface 2519' FSL, 771' FWL NW SW  
At top prod. interval reported below  
At total depth

API No.: 43-009-30015

15. DATE SPUNDED 1-15-77 16. DATE T.D. REACHED 2-1-77 17. DATE COMPL. (Ready to prod.) 3-5-77

18. ELEVATIONS (DF, RKB, RT, GR, ETC.)\* KB 6380.80' GR 6358'

20. TOTAL DEPTH, MD & TVD 5830' 21. PLUG, BACK T.D., MD & TVD 5753' 22. IF MULTIPLE COMPL., HOW MANY\* → 23. INTERVALS DRILLED BY → ROTARY TOOLS 0-5830' CABLE TOOLS -

24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)\*  
5608-5626' and 5632-5647', Dakota - Gas Storage

26. TYPE ELECTRIC AND OTHER LOGS RUN  
Comp. Formation Density, Dual Induction w/Linear correlation

28. CASING RECORD (Report all strings set in well)

CASING SIZE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
9-5/8"	36	304.67'	12-1/4	165	0
7"	23	5813.18'	8-3/4	440	0

29. LINER RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)

30. TUBING RECORD

SIZE	DEPTH SET (MD)	PACKER SET (MD)
4-1/2	5548.00	5548

31. PERFORATION RECORD (Interval, size and number)  
5608-5626' & 5632-5647', jet, 2 holes/ft.

32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED

33.\* PRODUCTION

DATE FIRST PRODUCTION	PRODUCTION METHOD (Flowing, gas lift, pumping—size and type of pump)	WELL STATUS (Producing or shut-in)					
SI	Flowing	SI					
DATE OF TEST	HOURS TESTED	CHOKE SIZE	PROD'N. FOR TEST PERIOD	OIL—BBL.	GAS—MCF.	WATER—BBL.	GAS-OIL RATIO
3-5-77	1		→				
FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE	OIL—BBL.	GAS—MCF.	WATER—BBL.	OIL GRAVITY-API (CORR.)	
250	350	→	NOT GAUGED - GAS STORAGE				

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)  
Vented while testing.

35. LIST OF ATTACHMENTS  
Logs as above, Well Completion to be sent at a later date.

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records  
SIGNED [Signature] TITLE Petroleum Engineering DATE March 11, 1977

\*(See Instructions and Spaces for Additional Data on Reverse Side)

# INSTRUCTIONS

**General:** This form is designed for submitting a complete and correct well completion report and log on all types of lands and leases to either a Federal agency or a State agency, or both, pursuant to applicable Federal and/or State laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office. See instructions on items 22 and 24, and 33, below regarding separate reports for separate completions.

If not filed prior to the time this summary record is submitted, copies of all currently available logs (drillers, geologists, sample and core analysis, all types electric, etc.), formation and pressure tests, and directional surveys, should be attached hereto, to the extent required by applicable Federal and/or State laws and regulations. All attachments should be listed on this form, see item 35.

**Item 4:** If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

**Item 18:** Indicate which elevation is used as reference (where not otherwise shown) for depth measurements given in other spaces on this form and in any attachments. **Items 22 and 24:** If this well is completed for separate production from more than one interval zone (multiple completion), so state in item 22, and in item 24 show the producing interval, or intervals, top(s), bottom(s) and name(s) (if any) for only the interval reported in item 33. Submit a separate report (page) on this form, adequately identified, for each additional interval to be separately produced, showing the additional data pertinent to such interval.

**Item 29:** "Sacks Cement": Attached supplemental records for this well should show the details of any multiple stage cementing and the location of the cementing tool. **Item 33:** Submit a separate completion report on this form for each interval to be separately produced. (See instruction for items 22 and 24 above.)

**37. SUMMARY OF POROUS ZONES:**  
SHOW ALL IMPORTANT ZONES OF POROSITY AND CONTENTS THEREOF; CORED INTERVALS; AND ALL DRILL-STEM TESTS, INCLUDING DEPTH INTERVAL TESTED, CUSHION USED, TIME TOOL OPEN, FLOWING AND SHUT-IN PRESSURES, AND RECOVERIES

FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	GEOLOGIC MARKERS	
				NAME	MEAS. DEPTH
					TOP
					TRUE VERT. DEPTH
				Log tops:	
				Mancos	0'
				Frontier	5253
				Mowry	5446
				Dakota	5606
				Morrison	5747'

COMPLETION REPORT

Well: Clay Basin Unit No. 24-S Date: April 12, 1977

Area: Clay Basin Gas Field Lease No: \_\_\_\_\_

- New Field Wildcat
- Development Well
- Shallower Pool Test
- New Pool Wildcat
- Gas Storage
- Extension
- Deeper Pool Test

Location: 2519 feet from South line, 771 feet from FWL line  
NW  $\frac{1}{4}$  SW  $\frac{1}{4}$

Section 21, Township 3 North, Range 24 East

County: Daggett State: Utah

Operator: Mountain Fuel Resources

Elevation: KB 6380.80 Gr 6358 Total Depth: Driller 5830 Log 5792

Drilling Commenced: January 15, 1977 Drilling Completed: February 2, 1977

Rig Released: February 3, 1977 Well Completed: March 5, 1977

Sample Tops: (unadjusted) \*

Frontier 5286  
 Mowry 5483  
 Dakota 5627

\* Refer to remarks section

Log Tops:

Mancos Surface  
 Frontier 5253  
 Mowry 5446  
 Dakota 5606  
 Morrison 5747



Sample Cuttings: None

Status: Gas Storage injection-withdrawal well

Producing Formation: Dakota

Perforations: 5608-5626, 5632-5647 with 2 jet shots per foot

Stimulation: None

Production: None

Plug Back Depth: 5753'

Plugs: None

Hole Size: 12 1/4" to 312'; 8 3/4" to 5830'

Casing/Tubing: 9 5/8" to 257' w/165 sacks, 7" to 5813.18' w/440 sacks;

Logging - Mud: 4 1/2" to 5548.0'

Mechanical: DIL (258-5786); FDC (3790-5788)

Contractor: Loffland Brothers Company

Completion Report Prepared by: G.G. Francis

Remarks: A 25.0 foot depth correction was necessary subsequent to the logging and coring operations.

COMPLETION REPORT (cont.)

Well: Unit No. 24-S

Area: Clay Basin Field


Cored Intervals (recovery): 5562-5570 (8.0); 5570-5582 (11); 5582-5623.8 (34.8)

Tabulation of Drill Stem Tests: None

<u>No.</u>	<u>Interval</u>	<u>IHP</u>	<u>IFP (min.)</u>	<u>ISIP (min.)</u>	<u>FFP (min.)</u>	<u>FSIP (min.)</u>	<u>FHP</u>	<u>Samples Caught</u>	<u>Remarks</u>
------------	-----------------	------------	-------------------	--------------------	-------------------	--------------------	------------	-----------------------	----------------


Clay Basin U # 24-S Sec 21, 3N, 24E

Bloody 15 June 89

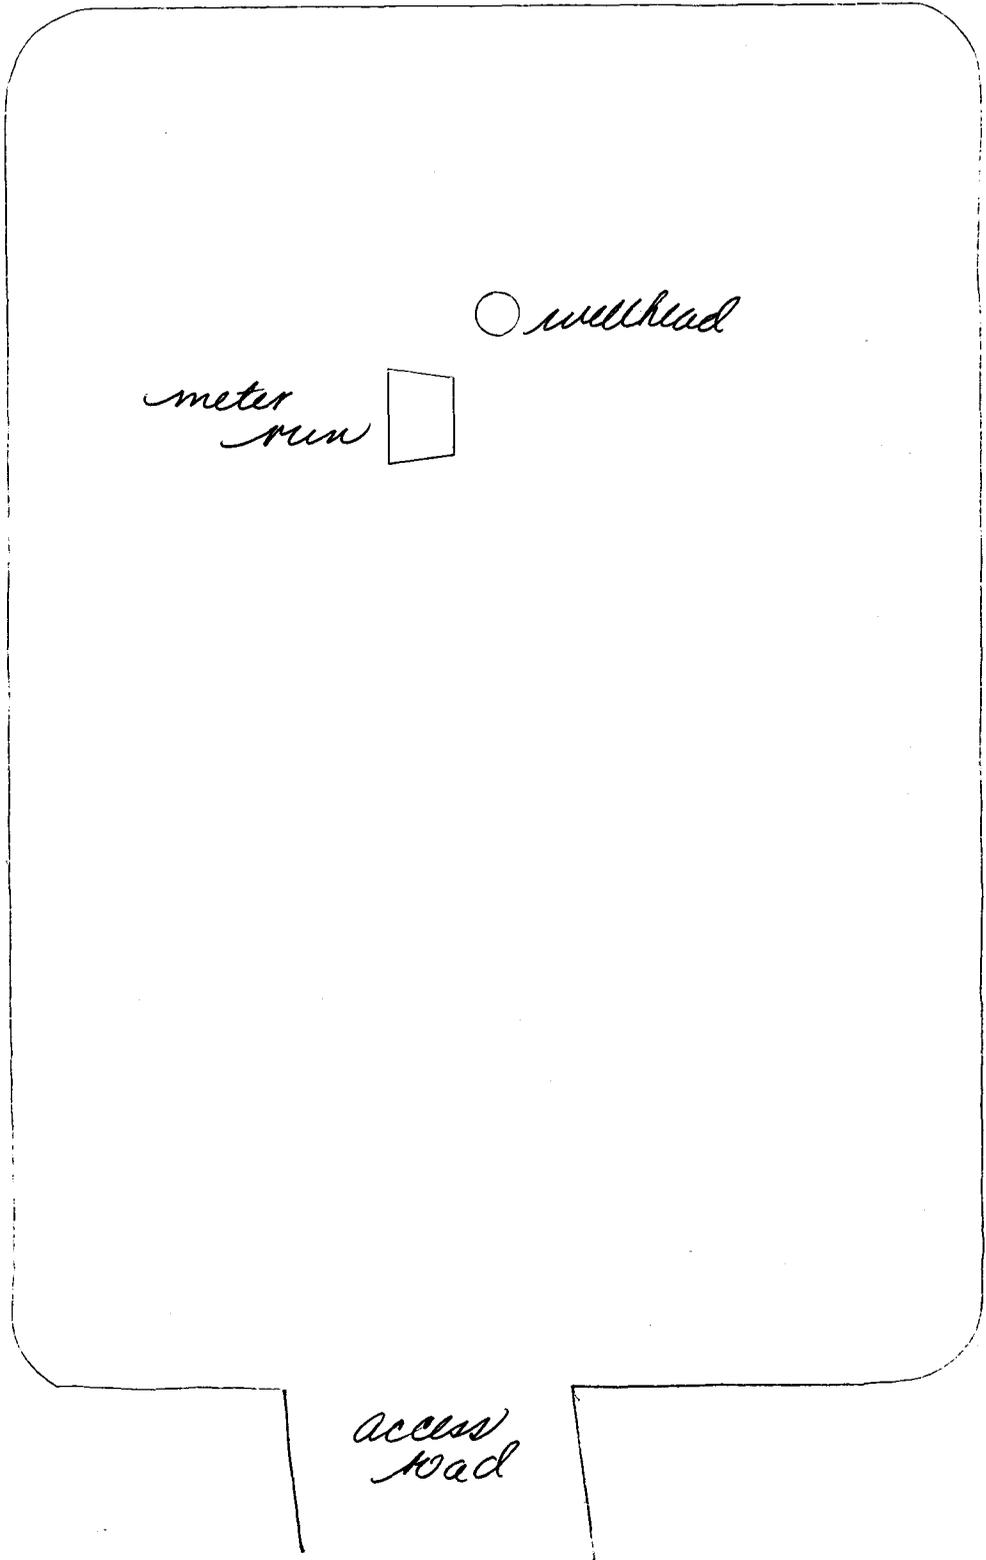

42,381 50 SHEETS 5 SQUARE  
42,382 100 SHEETS 4 SQUARE  
42,383 200 SHEETS 3 SQUARE  
42,384 300 SHEETS 2 SQUARE  
42,385 400 SHEETS 1 SQUARE  
MADE IN U.S.A.





# QUESTAR PIPELINE COMPANY

79 SOUTH STATE STREET • P. O. BOX 11450 • SALT LAKE CITY, UTAH 84147 • PHONE (801) 530-2400  
June 23, 1988

CERTIFIED MAIL  
RETURNED RECEIPT REQUESTED  
#P 879 571 459

Bureau of Land Management  
Utah State Office  
CFS Financial Center  
324 S. State Street  
Salt Lake City, UT 84111-2303

Re: Name Change  
Mountain Fuel Resources, Inc.  
to Questar Pipeline Company

REC'D JUN 28 AM 9 00  
BUREAU OF LAND MGMT  
SALT LAKE CITY

Gentlemen:

Enclosed for your files and information is a certified copy of the Articles of Amendment to the Articles of Incorporation of Mountain Fuel Resources, Inc. dated March 7, 1988, indicating that Mountain Fuel Resources, Inc. changed its name to Questar Pipeline Company.

Questar Pipeline Company holds interests in the following Federal Oil and Gas Leases in Utah:

- Novels on gas hold.*
- with CA*
- CA well - RT - OR's Mt. Fuel Resources*
- U-9712-A - *Questar Energy Co. 100%*
- U-11246 - *Agmt pending to "Questar Energy Co."*
- SLC-045051 (A) - *OR'S*
- SLC-045051 (B) - *OR'S*
- SLC-045053 (A) - *OR'S*
- SLC-045053 (B) - *OR'S*
- SLC-062508 - *OR'S*
- SLC-070555 - *OR'S*
- SLC-070555 (A) - *OR'S*
- ? Agreement No. 14-08-0001-16009  
(Clay Basin Gas Storage Agreement)

Please note and adjust your records in accordance with the above and furnish verification of your receipt of this notice to the undersigned.

Sincerely,

J. B. Neese  
Senior Landman

JBN/sdg

Enclosure

List of Leases

Overriding Royalties

U-09712-A  
U-011246

Operating Rights

SL-045051-A & B  
SL-045053-A & B  
SL-062508  
SL-0700555  
SL-070555-A  
SL-045049-A & B

Clay Basin Gas Storage Agreement  
Agreement No. 14-08-0001-16009

3100  
U-09712-A  
et al  
(U-942)  
*C. Seare*  
*3/9/89*

DECISION

Questar Pipeline Company : Oil and Gas Leases  
P.O. Box 11450 : U-09712-A et al  
Salt Lake City, Utah 84147 :

Corporate Name Change Recognized

Acceptable evidence has been received establishing that Mountain Fuel Resources, Inc. has changed their name to Questar Pipeline Company. Accordingly, the surviving company, Questar Pipeline Company, is recognized as holding all interests in Federal oil and gas leases which were held by Mountain Fuel Resources, Inc. We are changing our records with respect to the attached listing of oil and gas leases. If there are any other leases that will be affected, please contact this office.

**/s/ M. Willis**

**ACTING** Chief, Minerals  
Adjudication Section

Enclosure  
List of Leases

cc: All District Offices, Utah  
MMS, AFS  
MMS, BRASS  
920, Teresa Thompson  
Clay Basin Unit File

\CSeare:s1 3/9/89:1642f

RECEIVED

JAN 28 2004

DIV. OF OIL, GAS & MINING

**OPERATOR CHANGE WORKSHEET**

<b>ROUTING</b>
1. GLH
2. CDW
3. FILE

Change of Operator (Well Sold)

Designation of Agent/Operator

**X Operator Name Change**

Merger

The operator of the well(s) listed below has changed, effective:		<b>3/7/1988</b>
<b>FROM: (Old Operator):</b>	<b>TO: (New Operator):</b>	
N1070-Wexpro Company PO Box 45360 Salt Lake City, UT 84145-0360 Phone: 1-(801) 534-5267	N7560-Questar Pipeline Company PO Box 11450 Salt Lake City, UT 84147 Phone: 1-(801) 530-2019	

**CA No. Unit:**

<b>WELL(S)</b>								
NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
COALVILLE GAS STORAGE 8	10	020N	050E	4304330192	99990	Fee	GS	A
COALVILLE GAS STORAGE 9	10	020N	050E	4304330193	99990	Fee	GS	A
COALVILLE GAS STORAGE 10	10	020N	050E	4304330244	99990	Fee	GS	A
COALVILLE GAS STORAGE 12	09	020N	050E	4304330249	99990	Fee	GS	A
CLAY BASIN UNIT 5	20	030N	240E	4300915629	1025	Fee	GS	A
CLAY BASIN UNIT 3	16	030N	240E	4300915627	1025	State	GS	A
CLAY BASIN UNIT 27-S	16	030N	240E	4300930018	1025	State	GS	A
CLAY BASIN UNIT 52-S	16	030N	240E	4300930048	1025	State	GS	A
CLAY BASIN UNIT 53-S	16	030N	240E	4300930049	1025	State	GS	A
CLAY BASIN UNIT 59-S	16	030N	240E	4300930055	1025	State	GS	A
CLAY BASIN UNIT 35-S	17	030N	240E	4300930026	1025	Federal	GS	A
CLAY BASIN UNIT 40-S	20	030N	240E	4300930031	1025	Federal	GS	A
CLAY BASIN UNIT 49-S	20	030N	240E	4300930045	1025	Federal	GS	A
CLAY BASIN UNIT 2	21	030N	240E	4300915626	1025	Federal	GS	A
CLAY BASIN 24-S	21	030N	240E	4300930015	1025	Federal	GS	A
CLAY BASIN UNIT 25-S	21	030N	240E	4300930016	1025	Federal	GS	A
CLAY BASIN UNIT 26-S	21	030N	240E	4300930017	1025	Federal	GS	A
CLAY BASIN 30-S	21	030N	240E	4300930019	1025	Federal	GS	A
CLAY BASIN UNIT 33-S	21	030N	240E	4300930024	1025	Federal	GS	A

**OPERATOR CHANGES DOCUMENTATION**

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 1/13/2004
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 1/13/2004
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 1/14/2004
- Is the new operator registered in the State of Utah: YES Business Number: 649172-0142
- If **NO**, the operator was contacted on: \_\_\_\_\_

6. (R649-9-2)Waste Management Plan has been received on:

IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: 3/9/1989

8. **Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: n/a

9. **Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: n/a

10. **Underground Injection Control ("UIC"** The Division has approved UIC Form 5, **Transfer of Authority to Inject,** for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

**DATA ENTRY:**

1. Changes entered in the **Oil and Gas Database** on: 1/29/2004

2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 1/29/2004

3. Bond information entered in RBDMS on: 1/29/2004

4. Fee wells attached to bond in RBDMS on: 1/29/2004

5. Injection Projects to new operator in RBDMS on: n/a

**STATE WELL(S) BOND VERIFICATION:**

1. State well(s) covered by Bond Number: 965003032

**FEDERAL WELL(S) BOND VERIFICATION:**

1. Federal well(s) covered by Bond Number: 965002976

**INDIAN WELL(S) BOND VERIFICATION:**

1. Indian well(s) covered by Bond Number: n/a

**FEE WELL(S) BOND VERIFICATION:**

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number 965003033

2. The **FORMER** operator has requested a release of liability from their bond on: N/A  
The Division sent response by letter on: N/A

**LEASE INTEREST OWNER NOTIFICATION:**

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 1/29/2004

**COMMENTS:**

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**NEW ENTITY NUMBERS ASSIGNED FEBRUARY 2004**

ACCT	OPERATOR NAME	API NUM.	Sec	Twshp	Rng	WELL NAME	ENTITY	EFF DATE	REASON
N7560	Questar Pipeline Co	4300915629	20	030N	240E	Clay Basin Unit 5	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300915627	16	030N	240E	Clay Basin Unit 3	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930018	16	030N	240E	Clay Basin Unit 27-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930048	16	030N	240E	Clay Basin Unit 52-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930049	16	030N	240E	Clay Basin Unit 53-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930055	16	030N	240E	Clay Basin Unit 59-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930026	17	030N	240E	Clay Basin Unit 35-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930031	20	030N	240E	Clay Basin Unit 40-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930045	20	030N	240E	Clay Basin Unit 49-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300915626	21	030N	240E	Clay Basin Unit 2	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930015	21	030N	240E	Clay Basin 24-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930016	21	030N	240E	Clay Basin Unit 25-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930017	21	030N	240E	Clay Basin Unit 26-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930019	21	030N	240E	Clay Basin 30-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930024	21	030N	240E	Clay Basin Unit 33-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930030	21	030N	240E	Clay Basin Unit 39-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930044	21	030N	240E	Clay Basin Unit 48-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930046	21	030N	240E	Clay Basin Unit 50-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930047	21	030N	240E	Clay Basin Unit 51-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930054	21	030N	240E	Clay Basin Unit 58-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930056	21	030N	240E	Clay Basin Unit 60-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300915635	22	030N	240E	Clay Basin U 11 (RD Murphy)	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930021	22	030N	240E	Clay Basin 28-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930023	22	030N	240E	Clay Basin Unit 32-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930027	22	030N	240E	Clay Basin Unit 36-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage

Note to file: These entity numbers  
were changed to compliment the  
operator correction from 3/7/98