

5-8-77- ~~Feature~~ location change to: 1293' FNL + 535' FEL
5-7-77- Shut-in Gas Storage

FILE NOTATIONS

Entered in NID File	_____✓_____	Checked by Chief	_____
Entered On S R Sheet	_____	Copy NID to Field Office	_____
Location Map Pinned	_____✓_____	Approval Letter	_____
Card Indexed	_____✓_____	Disapproval Letter	_____
I W R for State or Fee Land	_____		

COMPLETION DATA:

Date Well Completed	5/7/77 - S.I.	Location Inspected	_____
OW_____	WW_____	TA_____	Bond released
			State of Fee Land
GW_____	OS_____	PA_____	_____

LOGS FILED

Driller's Log	_____✓_____		
Electric Logs (No.)	_____✓_____		
E_____	I_____	E-I_____	GR_____
			GR-N_____
			Micro_____
Lat_____	Mi-L_____	Sonic_____	Others_____

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK
 DRILL DEEPEN PLUG BACK

b. TYPE OF WELL
 OIL WELL GAS WELL OTHER Gas Storage SINGLE ZONE

2. NAME OF OPERATOR
 Mountain Fuel Resources, Inc.

3. ADDRESS OF OPERATOR
 P. O. Box 1129, Rock Springs, Wyoming 82901

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)
 At surface 1364' FNL 561' FEL SE NE
 At proposed prod. zone

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*
 39-1/2 miles south of Rock Springs, Wyoming

16. NO. OF ACRES IN LEASE
 1900.74

17. NO. OF ACRES ASSIGNED TO THIS WELL
 -


18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT.
 2400' Unit #19

19. PROPOSED DEPTH
 5807'

20. ROTARY OR CABLE TOOLS
 Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)
 GR 6357'

22. APPROX. DATE WORK WILL START*
 After Unit #39-S

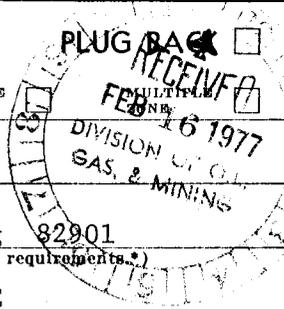

5. LEASE DESIGNATION AND SERIAL NO.
 SL - 045051 b

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
 -

7. UNIT AGREEMENT NAME
 Clay Basin Gas Storage Agreement

8. FARM OR LEASE NAME
 Clay Basin Unit *De*

9. WELL NO.
 40-S

10. FIELD AND POOL, OR WILDCAT
 Clay Basin Gas Storage

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
 SE NE 20-3N-24E

12. COUNTY OR PARISH
 Daggett

13. STATE
 Utah

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12-1/4"	9-5/8" new	36#, K-55	300'	180 sx, 3% CaCl
8-3/4"	7" new	23#, K-55	5807'	To be determined

We would like to drill the subject well to an estimated depth of 5807', anticipated formation tops are as follows: Mancos at the surface, Frontier at 5277', Mowry at 5477', Dakota at 5607', and Morrison at 5737'.



Mud will be adequate to contain formation fluids and in sufficient quantities to efficiently drill the well; blowout preventers will be checked daily and pressure tested after each string of casing is set; no cores, no DST's; no mud logging unit: 20 days drilling time; no abnormal temperatures or pressures or H₂S anticipated; probably run Laterlog & CDL logs.

APPROVED BY THE DIVISION OF
 OIL, GAS, AND MINING
 DATE: *2-18-77*
 BY: *C. B. Light*

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED *R. E. Myers* TITLE Manager, Drilling and Petroleum Engineering DATE Feb. 12, 1977

(This space for Federal or State office use)
 PERMIT NO. *43-009-30031* APPROVAL DATE
 APPROVED BY *Case #164-1* TITLE DATE
 CONDITIONS OF APPROVAL, IF ANY:

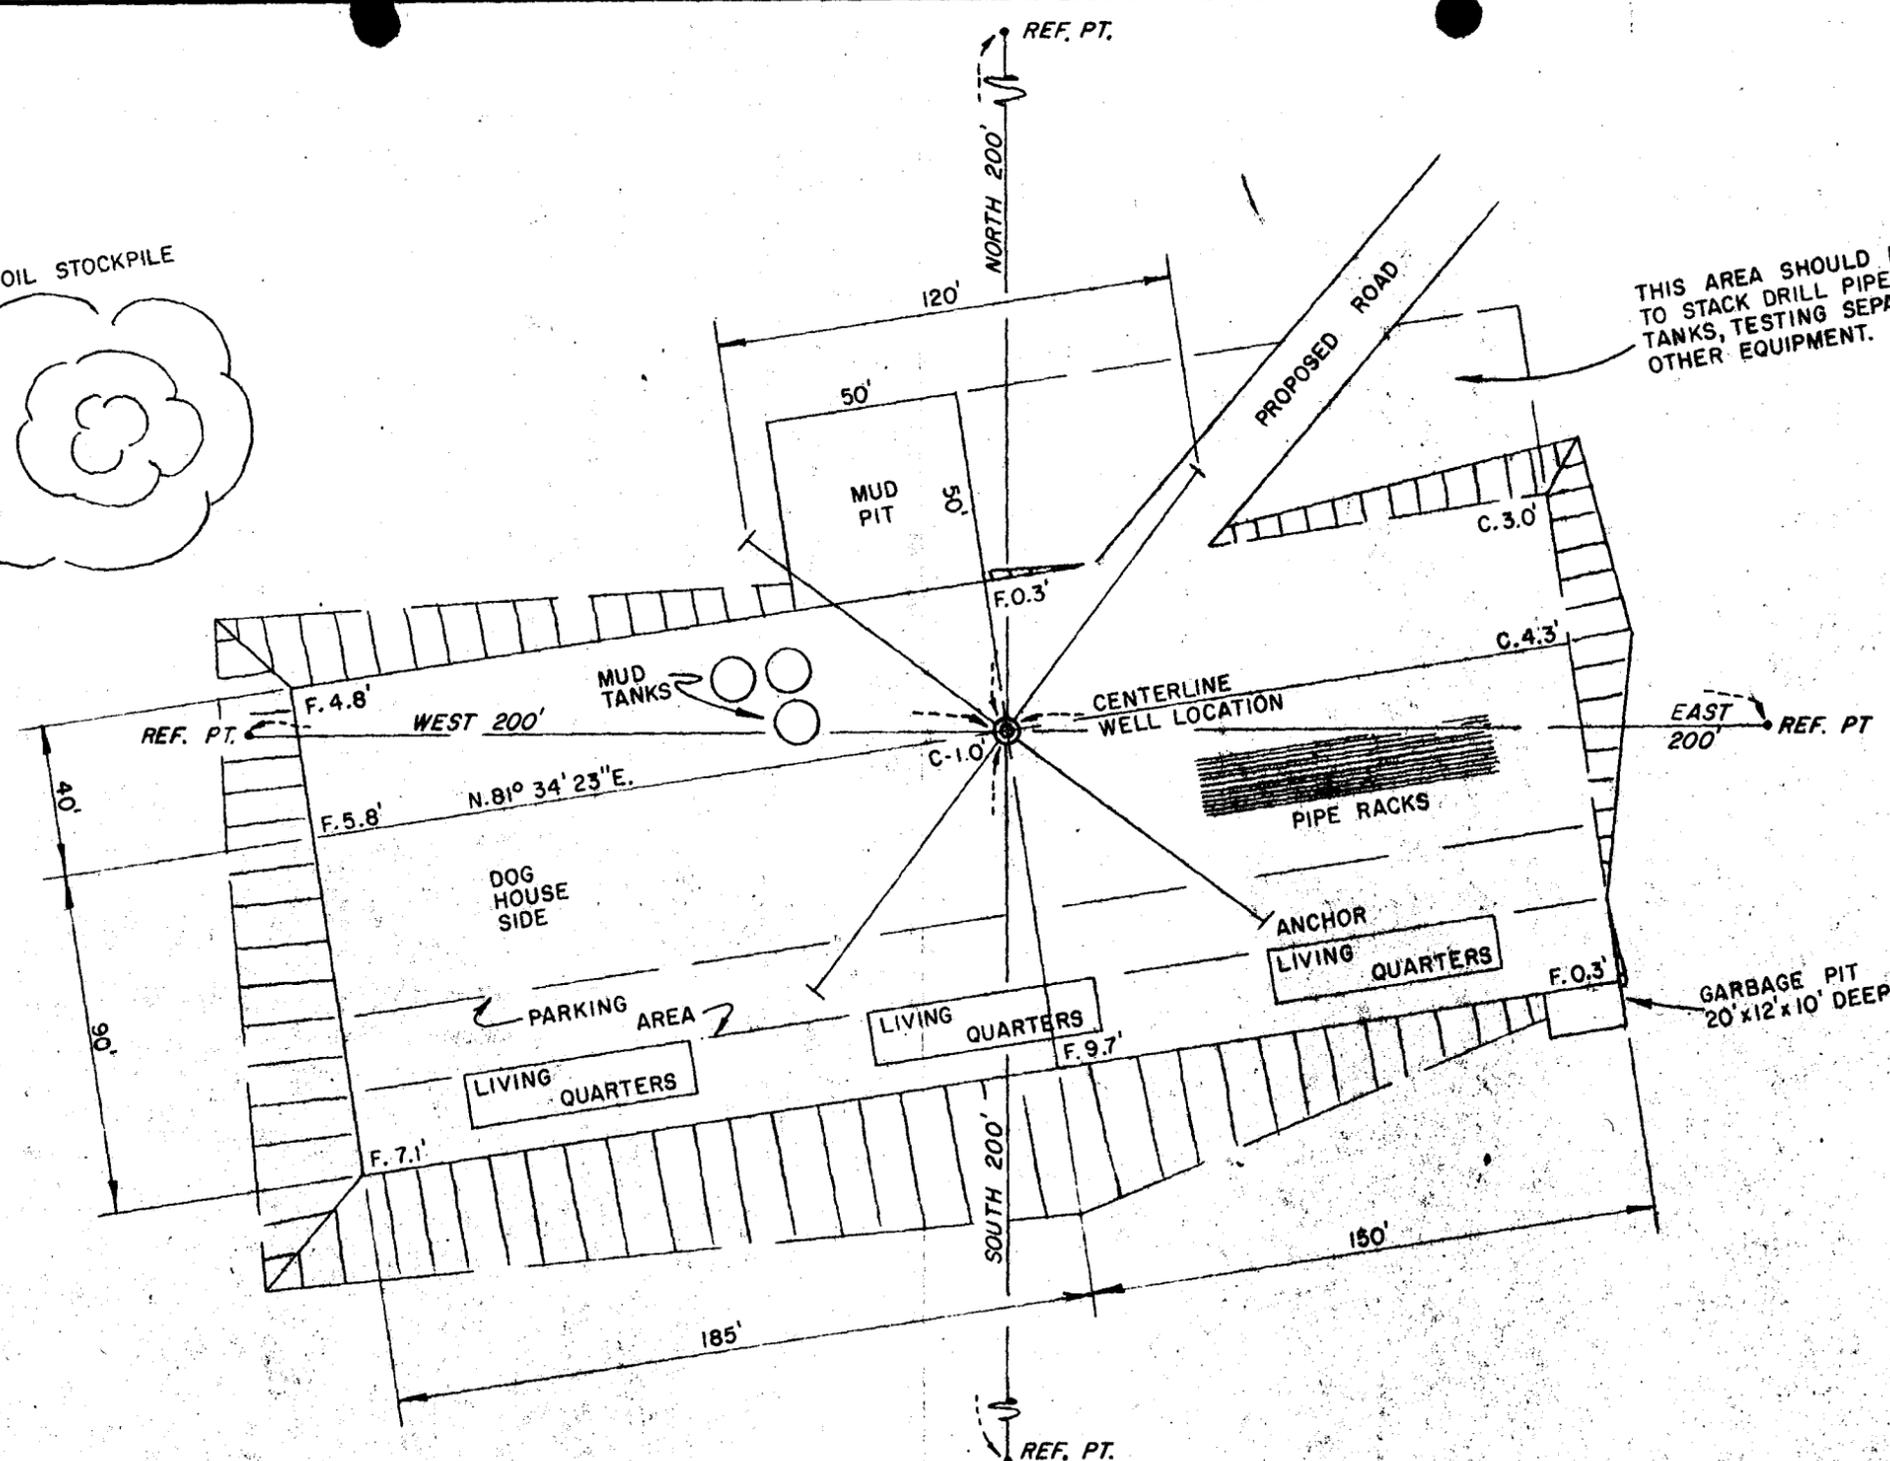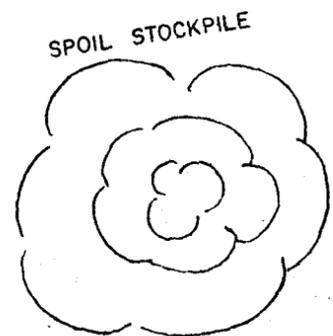

ENLARGED WELL SITE PLAN
SCALE 1" = 50'

GENERAL NOTES:

At sites where topsoil is present, same is to be removed and stored on the adjacent land for restoration of the site when required.

Mud pit and garbage pit are to be fenced, unlined.

For well location profiles see Drwg. N^o M-12404.


Area for well location = 1.0 Acres

LEGEND


- ⊕ WELL
- ⊕ STONE CORNER
- ⊕ PIPE CORNER

DRILLING W.O.

ENGINEERING RECORD	
SURVEYED BY	J.D. GOTTFREDSON 2-1-77
REFERENCES	G.L.O. PLAT <input checked="" type="checkbox"/> U.S.G.S. QUAD. MAP <input type="checkbox"/>
LOCATION DATA	
FIELD	CLAY BASIN
LOCATION: SE 1/4, NE 1/4, SEC. 20, T.3N., R.24E. SALT LAKE MERIDIAN 1364' FNL, 561' FEL	
DAGGETT COUNTY, UTAH	
WELL ELEVATION: 6357 (AS GRADED) BY VERTICAL ANGLE OBSERVATION FROM MFS CO. BENCH MARK Δ 120.	

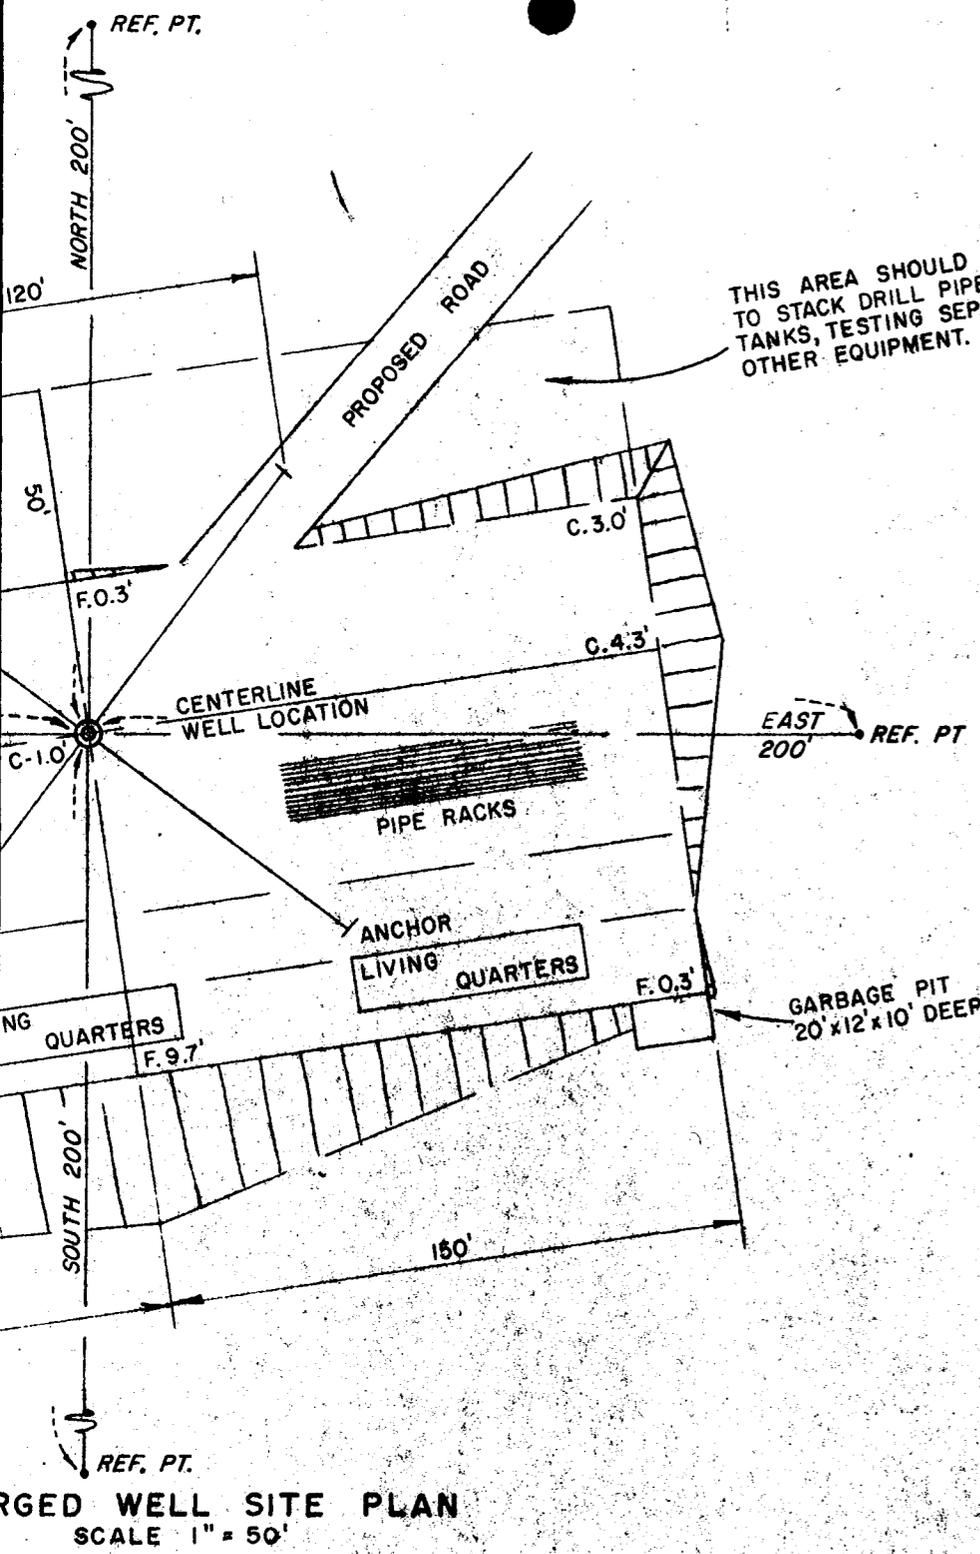

GRADED WELL SITE PLAN
SCALE 1" = 50'

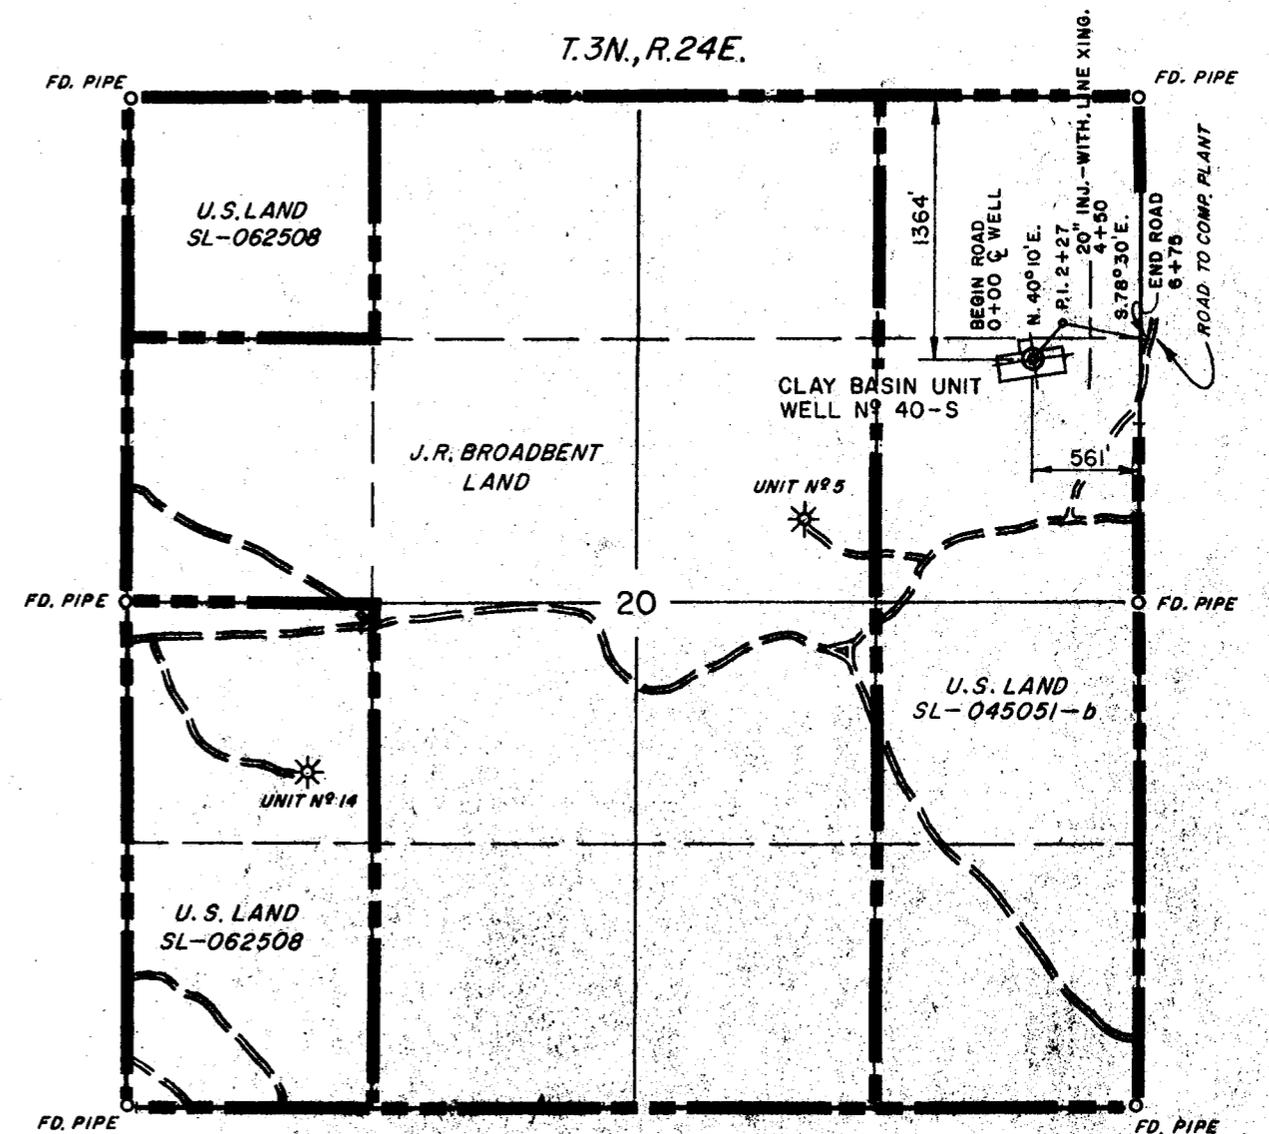





LOCATION PLAN
SCALE 1" = 1000'

This is to certify that the above plat was prepared from field notes of actual surveys made by me or under my supervision and that the same are true and correct to the best of my knowledge.

J. D. Gotfredson
ENGINEER
UTAH REGISTRATION L.S. N° 3521

DRILLING W.O.

LEGEND		ENGINEERING RECORD		REVISIONS				MOUNTAIN FUEL RESOURCES, INC.	
⊕	WELL	SURVEYED BY	J.D. GOTFREDSON 2-1-77	NO.	DESCRIPTION	DATE	BY	CERTIFIED WELL LOCATION AND WELL SITE PLAN CLAY BASIN UNIT WELL N° 40-S	
⊕	STONE CORNER	REFERENCES	G.L.O. PLAT <input checked="" type="checkbox"/> U.S.G.S. QUAD. MAP <input type="checkbox"/>						
⊕	PIPE CORNER	LOCATION DATA						DRAWN: 2-3-77 GeB SCALE: AS NOTED CHECKED: GeL SMF DRWG. NO. M-12403 APPROVED: RWH	
		FIELD	CLAY BASIN						
		LOCATION: SE 1/4, NE 1/4, SEC. 20, T.3N., R.24E. SALT LAKE MERIDIAN 1364' FNL, 561' FEL							
		DAGGETT COUNTY, UTAH							
		WELL ELEVATION: 6357 (AS GRADED) BY VERTICAL ANGLE OBSERVATION FROM MFS CO. BENCH MARK Δ 120.						SHEET 1 OF 2	

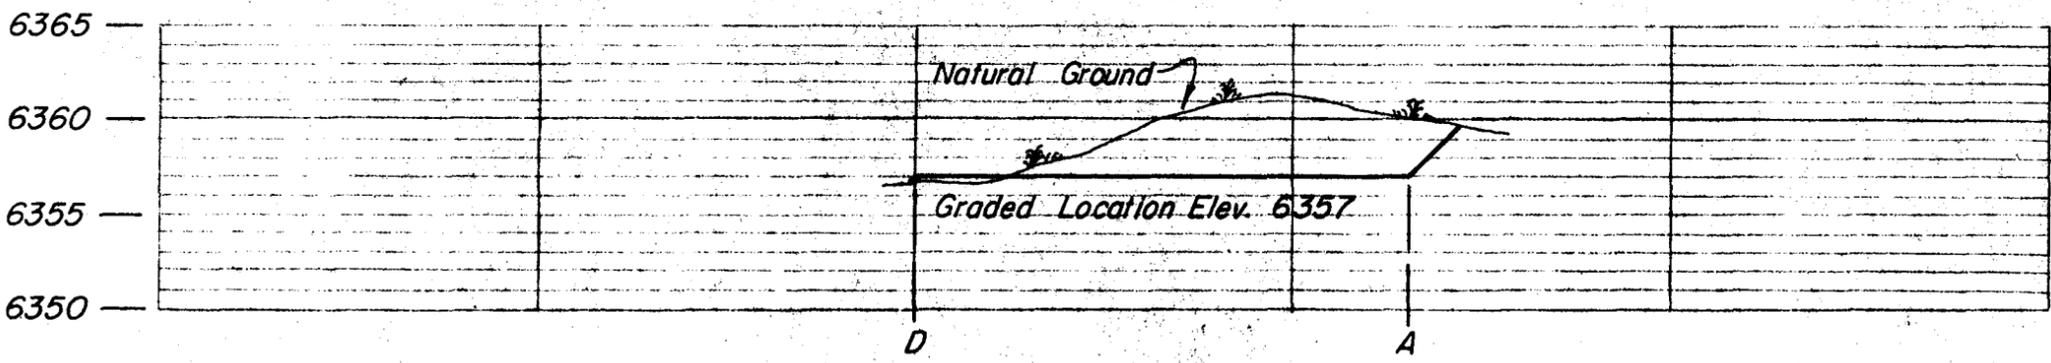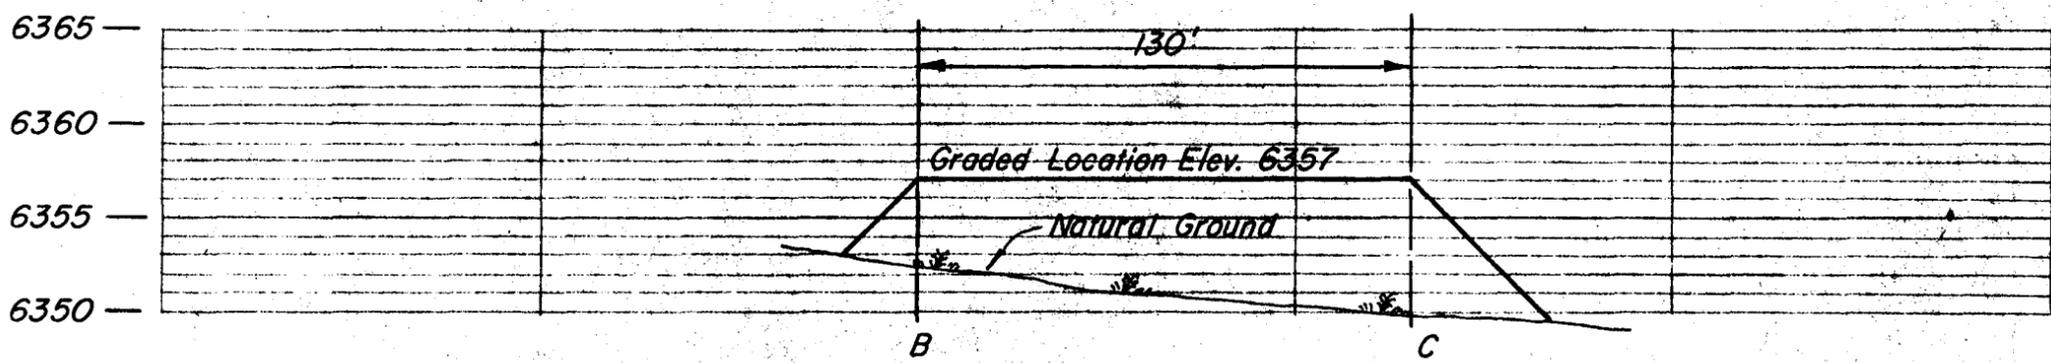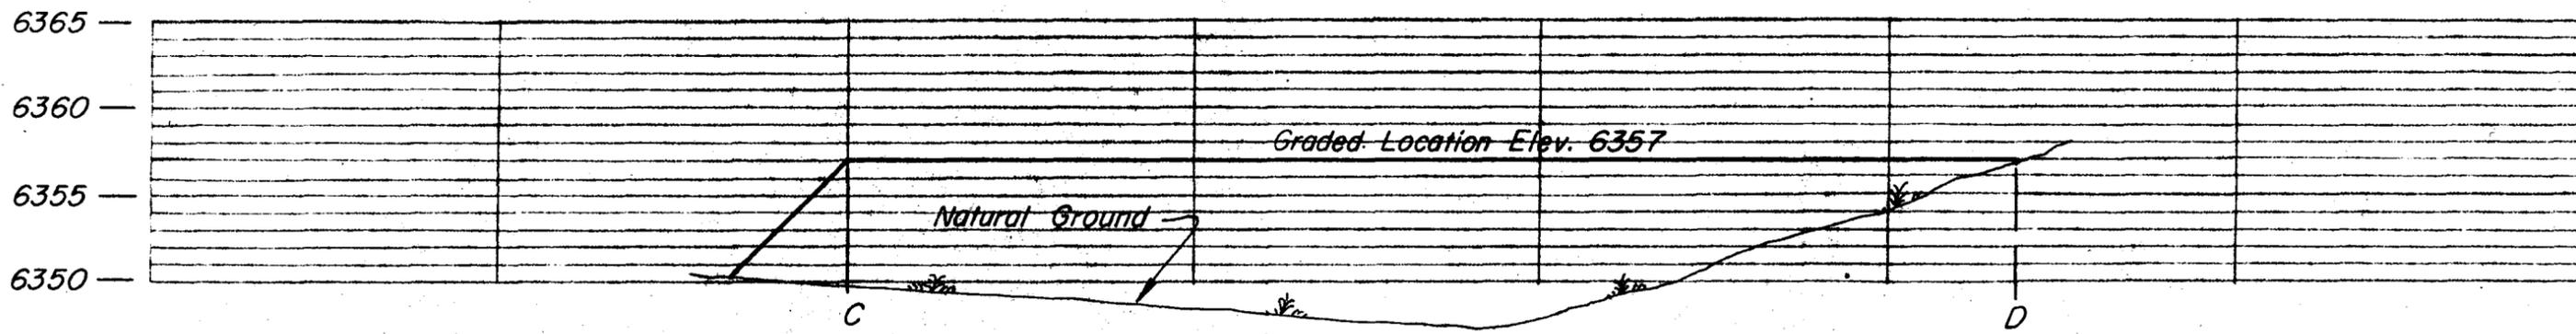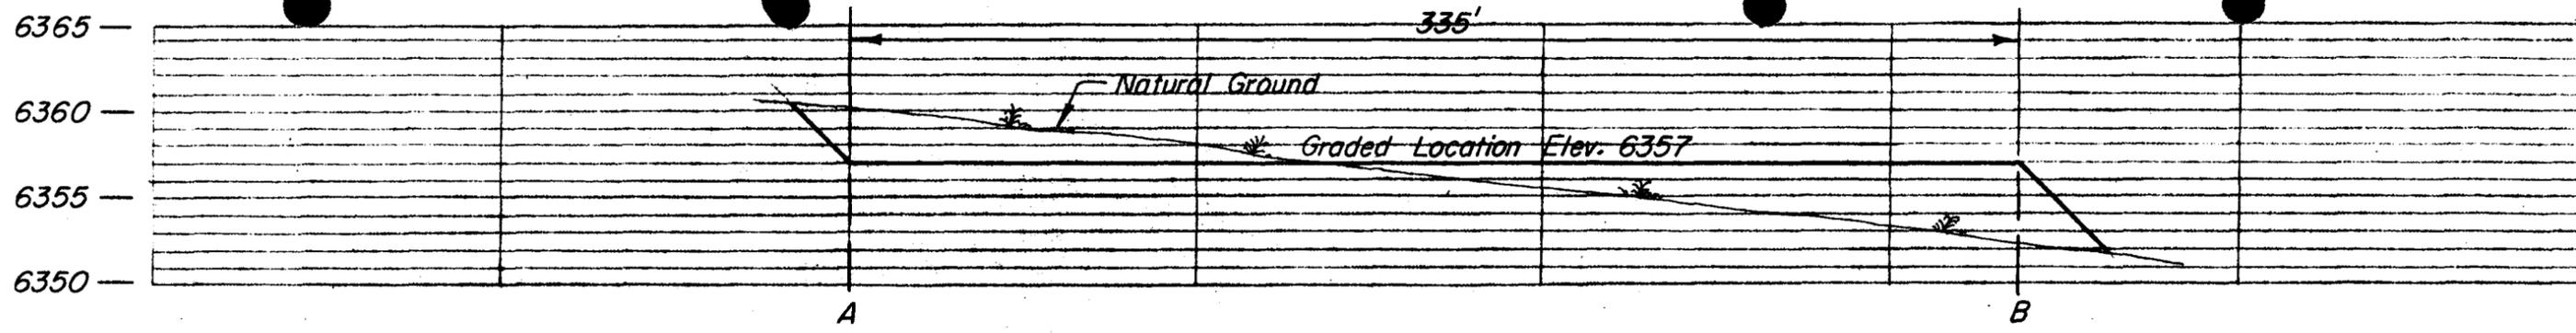

— PROFILE SECTIONS —
 PROPOSED GRADED LOCATION
 HORIZ. 1" = 50'
 VERT. 1" = 10'

335'

und

Graded Location Elev. 6357


B

Graded Location Elev. 6357

D


C

A

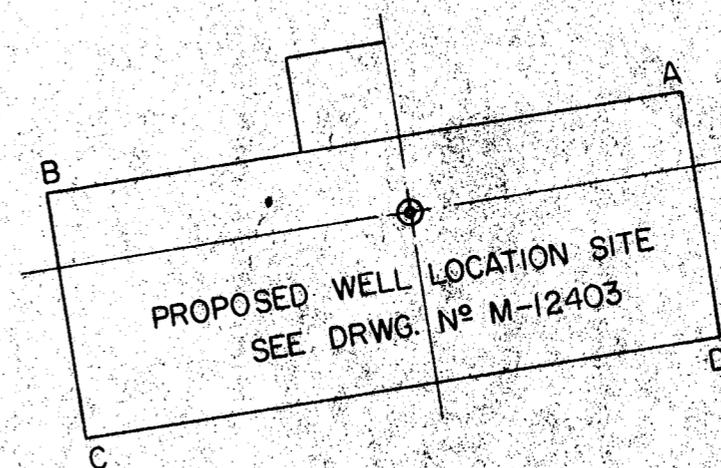

KEY MAP
SCALE 1"=100'

REVISIONS				 MOUNTAIN FUEL RESOURCES, INC.
NO.	DESCRIPTION	DATE	BY	
				PROFILES FOR CLAY BASIN UNIT WELL No 40-S WELL LOCATION SITE
DRAWN: 2-3-77 GdB			SCALE: AS NOTED	DRWG. NO. M-12404 2/2
CHECKED: GEL SMF			APPROVED: RWH	
APPROVED: RWH				

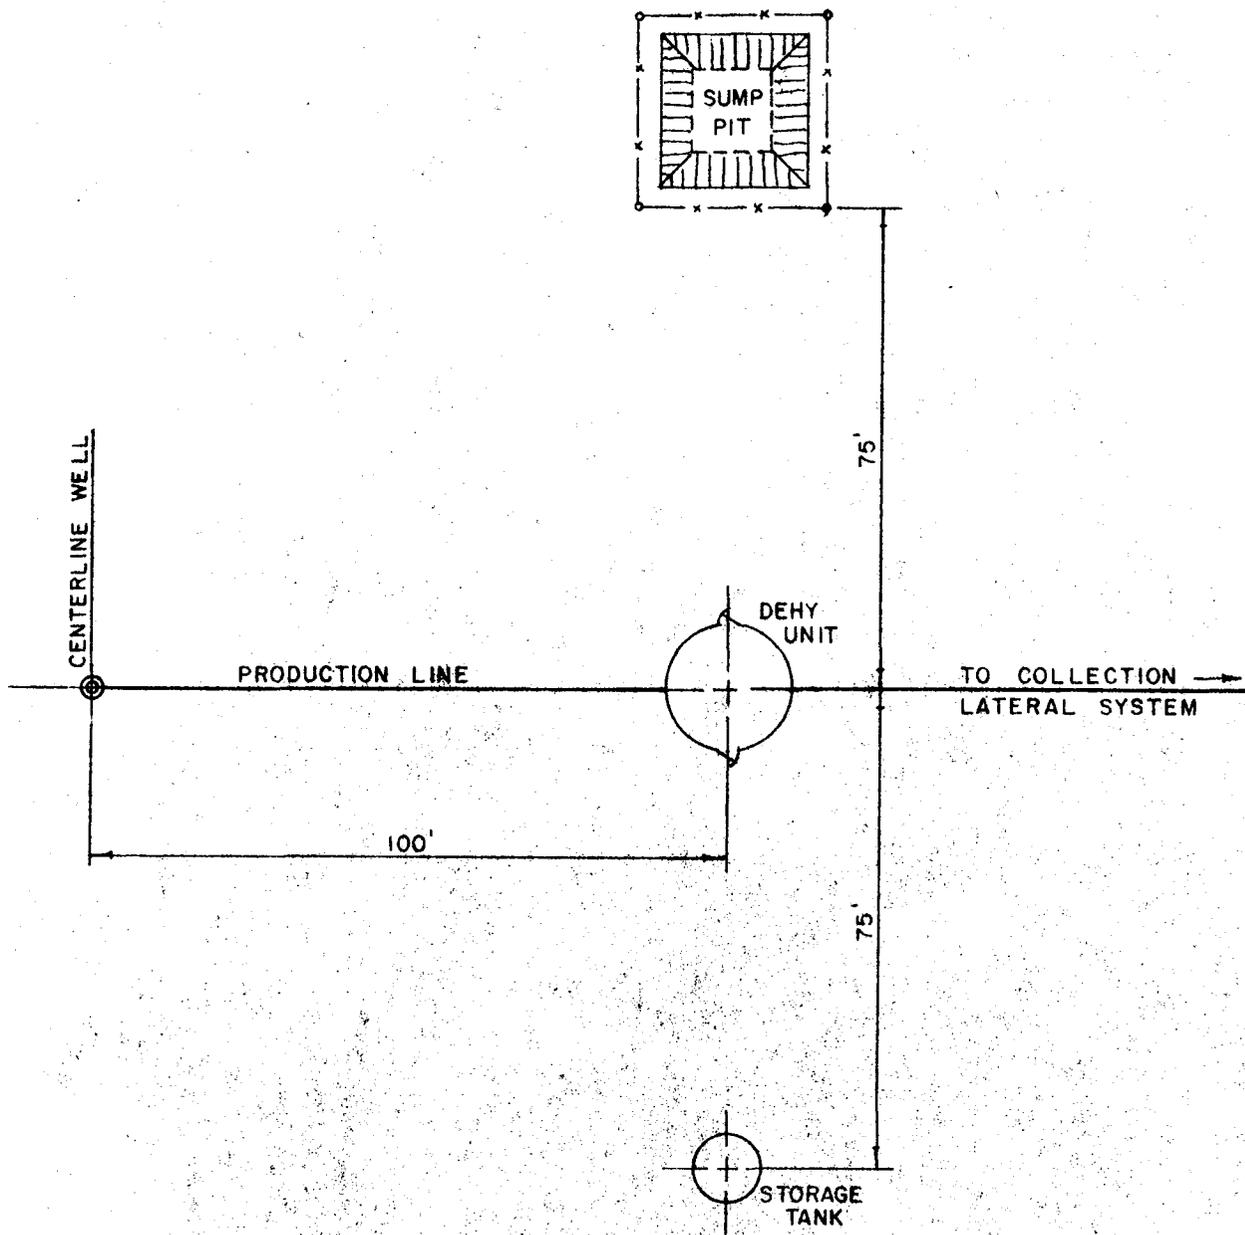

REVISIONS				 MOUNTAIN FUEL RESOURCES, INC.
NO.	DESCRIPTION	DATE	BY	
				TYPICAL PRODUCTION FACILITIES LAYOUT FOR CLAY BASIN UNIT WELL N^o 40-S
DRAWN: 7/9/76 FJC		SCALE: NONE		DRWG. NO. M-12205
CHECKED:				
APPROVED:				

Well Name Clay Basin Unit Well No. 40-S

Location SE NE 20-3N-24E

Daggett County, Utah

<u>Wellhead Equipment</u>	<u>Size</u>	<u>Pressure Rating</u>	<u>Pressure Test</u>
Surface Casing Flange	10	3000	
Casing Spool			
Tubing Spool	10 x 6	3,000	6,000
Tubing Bonnet	10 x 4	3,000	6,000

<u>Flow Out Preventers</u> (Top to Bottom)	<u>Size</u>	<u>P3I Rating</u>	<u>P3I Test</u>	<u>Bag</u>	<u>Rams</u>
	10	3,000	6,000		Blind
	10	3,000	6,000		4-1/2

<u>Gas Buster</u>	<u>Yes</u>	<u>X</u> <u>No</u>	<u>Degasser</u>	<u>Yes</u>	<u>X</u> <u>No</u>

<u>Kill or Control Manifold</u>			
<u>2"</u> <u>Size</u>	<u>3,000</u> <u>Pressure Rating</u>	<u>6,000</u> <u>Pressure Rating Test</u>	<u>No</u> <u>Hydraulic Valves</u>

<u>Auxiliary Equipment</u>	<u>Kelly Cock</u>	<u>X</u> <u>Yes</u>	<u>No</u>

<u>Monitoring Equipment on Mud System</u>	<u>Yes</u>	<u>X</u> <u>No</u>

<u>Full Opening Drill Pipe Stabbing Valve on Floor</u>	<u>X</u> <u>Yes</u>	<u>No</u>

<u>Type of Drilling Fluid</u>	<u>X</u>	<u>Air</u>	<u>Gas</u>	<u>OIL Base Mud</u>
	Water Base Mud			

Anticipated Bottom Hole Pressure 500
P3I

DEVELOPMENT PLAN FOR U.S.G.S. APPROVAL OF SURFACE USE
MOUNTAIN FUEL SUPPLY COMPANY DRILLING WELLS

Well Name - Clay Basin Well No. 40-S

Field or Area - Clay Basin, Daggett County, Utah

1. Existing Roads -

- A) Proposed well site as staked - Refer to well location plat No. M-12403 for location of well access road and directional reference stakes.
- B) Route and distance from nearest town or locatable reference point to where well access route leaves main road - Refer to lateral map No. M-9030. From the Wyoming-Utah State Line to Rock Springs, Wyoming is 50 miles.
- C) Access road to location - Refer to lateral map No. M-9030 and well site map No. M-12403 for access road from Wyoming-Utah State Line to Clay Basin Unit Well No. 40-S.
- D) If exploratory well, all existing roads within a 3-mile radius of well site - Not an exploratory well
- E) If development well, all existing roads within a 1-mile radius - This will be a storage development well. Refer to later map No. M-9030 for existing roads.
- F) Plans for improvement and/or maintenance of existing roads - All existing roads will be maintained as needed by Mountain Fuel equipment.

2. Planned Access Road -

- A) Width - 16' wide from shoulder to shoulder.
- B) Maximum grade - The maximum grade on the road is 8 percent.
- C) Turnouts - No turnouts will be constructed.
- D) Drainage design - A drainage ditch on the uphill side of the road will be constructed. It will be a minimum of one foot below the surface of the road. No water diversion ditches are anticipated.
- E) Location and size of culverts and description of major cuts and fills -
 - 1) For culvert size and location see drawing No. M-12403.
 - 2)
- F) Surfacing material - No surfacing material will be needed either on the road of location.
- G) Necessary gates, cattle guards or fence cuts - No cattle guards, gates, or fence cuts are anticipated.
- H) New or reconstructed roads - Refer to drawing No. M-12403 for location of new access road. No existing road to be reconstructed.

3. Location of Existing Wells -

- A) Water wells - None within a one mile radius.
- B) Abandoned wells - None within a one mile radius.
- C) Temporarily abandoned wells - None within a one mile radius.

- D) Disposal wells - None within a one mile radius.
 - E) Drilling wells - Refer to area map No. M-9030 for proposed well locations.
 - F) Producing wells - Clay Basin Well Nos. 2, 4, 11, and 24 are productive gas wells.
 - G) Shut-in wells - None within a one mile radius.
 - H) Injection wells - Clay Basin Well Nos. 2 and 5 are gas storage injection/withdrawal wells.
 - I) Monitoring or observation wells for other resources - None within a one mile radius.
4. Location of Existing And/Or Proposed Facilities - Refer to area map No. M-9030.
- A) 1) Tank batteries - None within a one mile radius.
 - 2) Production facilities - Each productive gas well has its own production facilities. Also, a compressor plant is located near Unit Well No. 3. Also, a compressor plant for injection is being built near Unit Well No. 3.
 - 3) Oil gathering lines -
No oil gathering lines are located in the Clay Basin area.
 - 4) Gas gathering lines - Several gas gathering lines are located within a one mile radius. Refer to drawing No. M-9030.
 - 5) Injection lines - Several injection/withdrawal lines are located within a one mile radius. Refer to area map No. M-9030.
 - 6) Disposal lines -
None within a one mile radius.
- B) 1) Proposed location and attendant lines by flagging if off the well pad -
The well will be used as a gas storage well. A 6-inch buried line will be installed from the well to the central dehydration facilities as shown on drawing No. M-9030.
 - 2) Dimensions of facilities - Refer to drawing No. M-12205.
 - 3) Construction methods and materials - No construction materials are anticipated. The dirt work will be done with a back hoe, i.e., ditches, dehydration base, tank base, etc.
 - 4) Protective measures and devices to protect livestock and wildlife -
The sump pit will be fenced as shown on drawing No. M-12205.
- C) Plans for rehabilitation of disturbed area no longer needed for operations after construction is completed - After construction is complete, areas of non use will be restored and needed.
5. Location and Type of Water Supply -
- A) Location of water - The water withdrawal point on Red Creek is located in the SW 1/4 of Section 22, T.12N., R.105W., of the 6th P.M., Sweetwater County, Wyoming.
 - B) Method of transporting water - Water will be hauled by tank truck from Red Creek to Unit Well No. 40-S. The well access road, as shown on drawing No. M-9030, will be used as the water haul road.

C) Water well to be drilled on lease - No water well will be drilled.

6. Source of Construction Material -

A) Information - No construction material will be used.

B) Identify if from Federal or Indian land -

C) Where materials are to be obtained and used -

D) Access roads crossing Federal or Indian lands -

7. Method for Handling Waste Disposal -

A-D) Cuttings, drilling fluids, produced fluids, and sewage will be placed in the mud pit.

E) Garbage and other waste material will be placed in the burn pit.

F) After drilling operations have been completed, the location will be cleared of all litter, and the trash will be burned in the burn pit. The burn pit will be covered over. The mud pit liquids will be pumped out and dumped on the existing roads. The mud pit will be covered over.

8. Ancillary Facilities - There now is a camp located in the NE 1/4 of Section 21, T.3N., R.24E. with housing and general camp facilities. A landing strip is located on the north line of Section 21. Water is piped to the camp from a spring to the west.

9. Well Site Layout -

See drawing Nos. M-12403 and M-12404.

10. Plans for Restoration of Surface -

A) After drilling operations, the well site will be cleared and cleaned and the burn pit filled in. Should the well be a dry hole, the surface will be restored to the extent that it will blend in with the landscape. The reserve pit liquids will be pumped out and dumped on the existing roads.

B) Revegetation and rehabilitation of the location and access road will be done to comply with Bureau of Land Management recommendations.

C) Prior to rig release, pits will be fenced and so maintained until clean up.

D) If oil is in the mud pit, overhead flagging will be installed to keep birds out.

E) Clean up will begin within two months after drilling operations have been completed and the land will be restored at this time.

11. Other Information -

A) The location lies at the top of a small hill. The soil is sandy with gravel rock. The vegetation is sagebrush and native grass.

B) The surface belongs to the U.S. Government.

C) Water can be located in Red Creek. The Clay Basin camp is occupied by Mountain Fuel personnel. No historical, archaeological, or cultural sites are in the area to my knowledge.

12. Lessee's or Operator's Representative -

D. E. Dallas, Drilling Superintendent, P. O. Box 1129, Rock Springs, Wyoming 82901, telephone 307-362-5611.

13. Certification -

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and, that the work associated with the operations proposed herein will be performed by Mountain Fuel Supply Company and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

Date _____

Name *Dale D. Hallam*
Title Drilling Superintendent

cdk

** FILE NOTATIONS **

Date: Feb. 16 -
Operator: Mountain Fuel Services
Well No: Clay Basin Unit 40-5
Location: Sec. 20 T. 3N R. 24E County: Sage

File Prepared Entered on N.I.D.
Card Indexed Completion Sheet

CHECKED BY:

Administrative Assistant [Signature]
Remarks:
Petroieum Engineer [Signature]
Remarks:
Director [Signature]
Remarks:

INCLUDE WITHIN APPROVAL LETTER:

Bond Required Survey Plat Required
Order No. 164-1 Surface Casing Change
to _____

Rule C-3(c), Topographic exception/company owns or controls acreage within a 660' radius of proposed site

O.K. Rule C-3 O.K. In Clay Basin unit
Other:

Letter Written/Approved

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPPLICATE*
(Other instructions on reverse side)

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

SL - 045051 b

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

-

7. UNIT AGREEMENT NAME

Clay Basin Gas Storage Agreement

8. FARM OR LEASE NAME

Unit Well

9. WELL NO.

40-S

10. FIELD AND POOL, OR WILDCAT

Clay Basin Gas Storage

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

NE NE 20-3N-24E

12. COUNTY OR PARISH

Daggett

13. STATE

Utah

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL GAS WELL OTHER **Gas Storage**

2. NAME OF OPERATOR
Mountain Fuel Resources, Inc.

3. ADDRESS OF OPERATOR
P. O. Box 1129, Rock Springs, Wyoming 82901

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.)
At surface
1293' FNL, 535' FEL NE NE

14. PERMIT NO. **API No.: 43-009-30031** 15. ELEVATIONS (Show whether DF, RT, GR, etc.) **GR 6356'**

16. **Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data**

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF <input type="checkbox"/>	PULL OR ALTER CASING <input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	MULTIPLE COMPLETE <input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	ABANDON* <input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>
(Other) <input type="checkbox"/>	


SUBSEQUENT REPORT OF:

WATER SHUT-OFF <input type="checkbox"/>	REPAIRING WELL <input type="checkbox"/>
FRACTURE TREATMENT <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
SHOOTING OR ACIDIZING <input type="checkbox"/>	ABANDONMENT* <input type="checkbox"/>
(Other) <u>Move location</u> <input checked="" type="checkbox"/>	

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Location was moved per request of BLM, new location plats are attached.

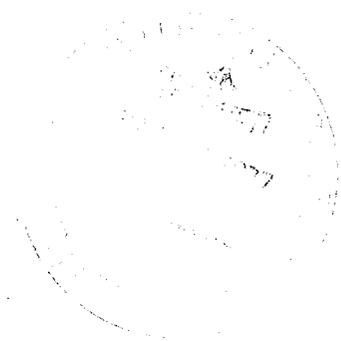

18. I hereby certify that the foregoing is true and correct

SIGNED R. G. Myers

TITLE

Manager, Drilling and Petroleum Engineering

DATE

March 8, 1977


(This space for Federal or State office use)

APPROVED BY _____

TITLE _____

DATE _____

CONDITIONS OF APPROVAL, IF ANY:

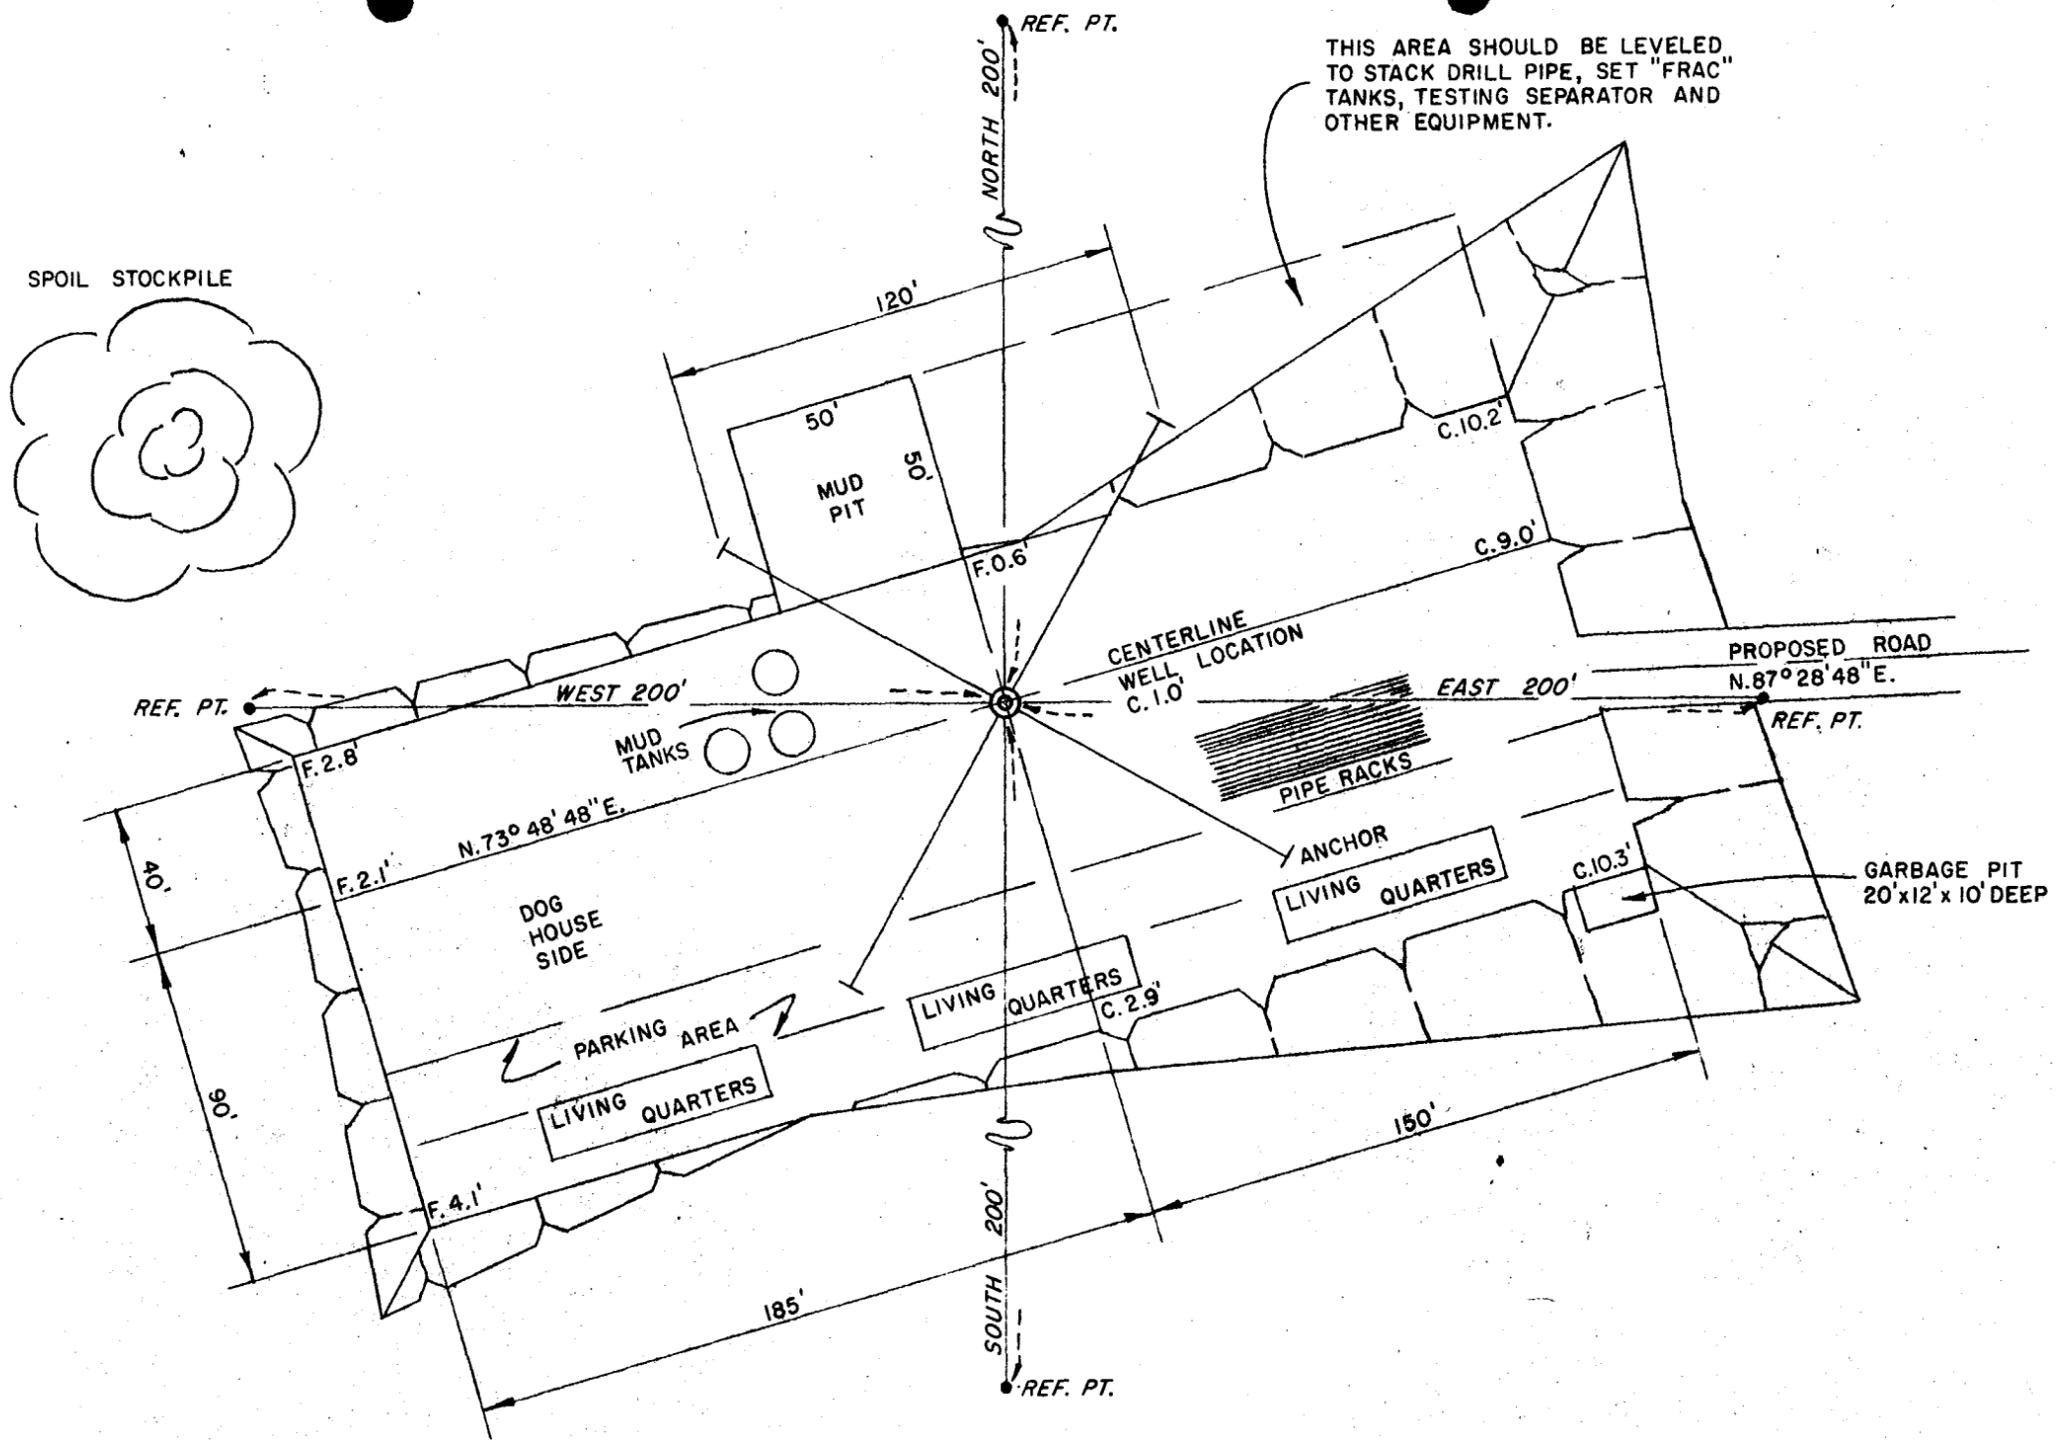

ENLARGED WELL SITE PLAN
SCALE 1" = 50'

GENERAL NOTES:

At sites where topsoil is present, same is to be removed and stored on the adjacent land for restoration of the site when required.

Mud pit and garbage pit are to be fenced, unlined.

For well location profiles see Drwg. N^o M-12451

Area for well location = 1.0 Acres


For original well location see Drwg. N^o M-12403

LEGEND

- ⊕ WELL
- ⊕ STONE CORNER
- ⊕ PIPE CORNER


DRILLING W.O.

ENGINEERING RECORD	
SURVEYED BY	FRED HANKING 2-2-77
REFERENCES	G.L.O. PLAT <input checked="" type="checkbox"/> U.S.G.S. QUAD. MAP <input type="checkbox"/>
LOCATION DATA	
FIELD	CLAY BASIN
LOCATION: NE 1/4, NE 1/4, SEC. 20, T.3N., R.24E. SALT LAKE MERIDIAN, 1293' FNL, 535' FEL	
DAGGETT COUNTY, UTAH	
WELL ELEVATION: 8356 (AS GRADED) BY ELECTRONIC VERTICAL ANGLE ELEVATIONS FROM M.F.S. Co. BENCH MARK Δ 120.	

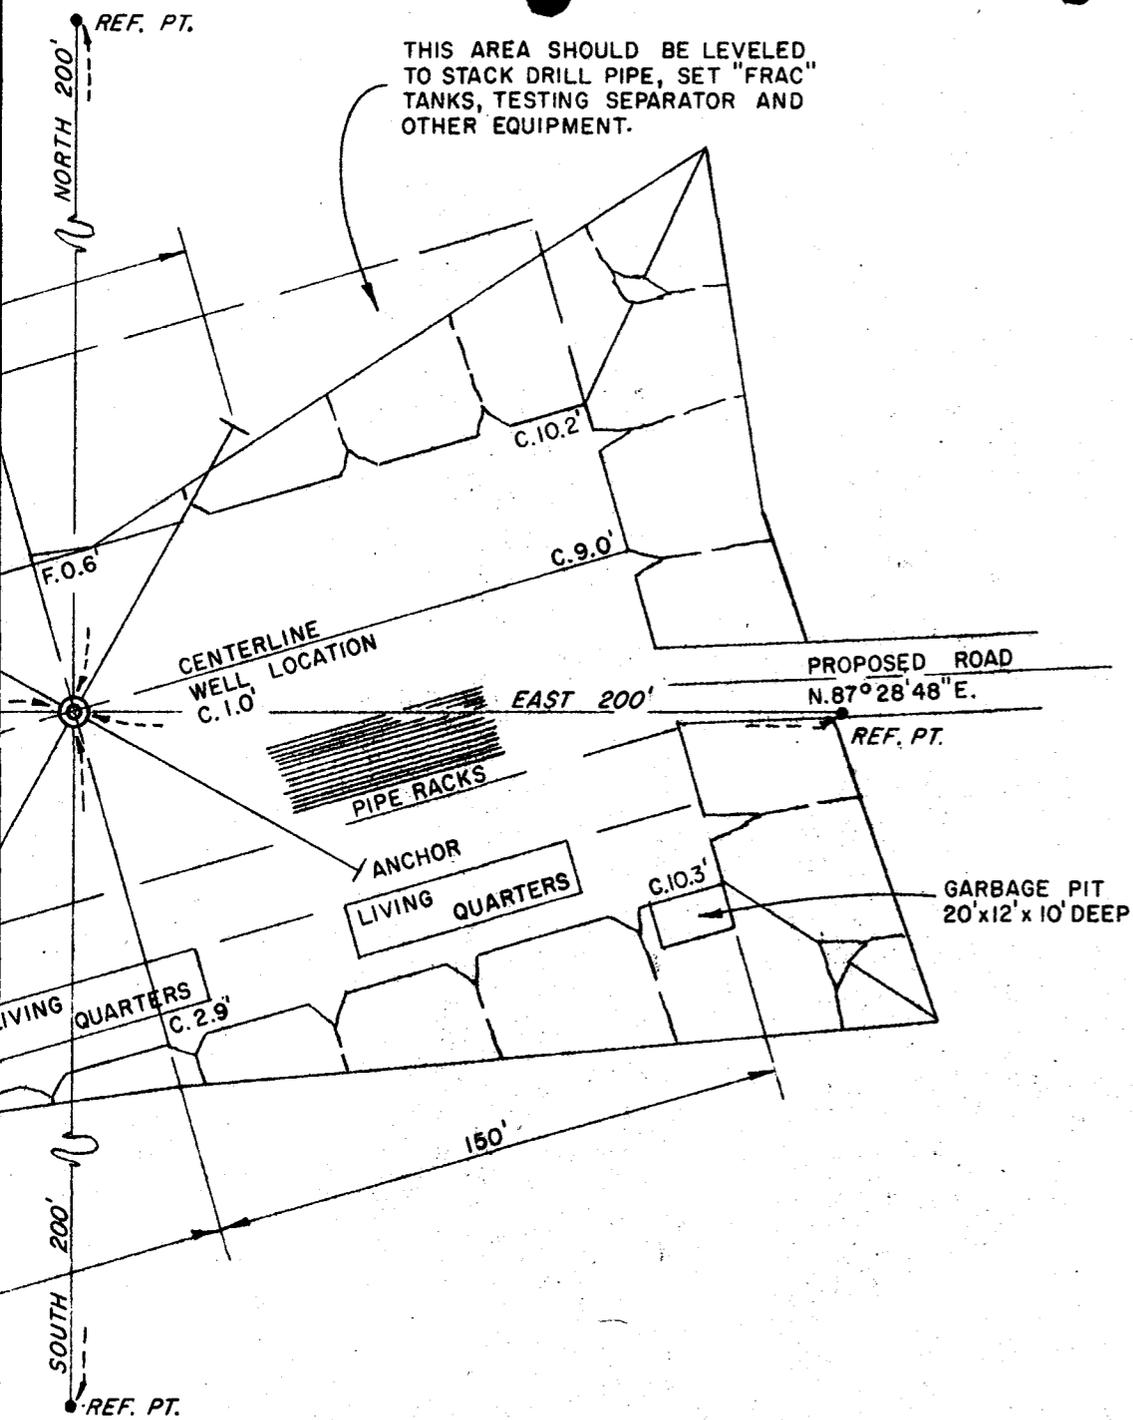

GRADED WELL SITE PLAN
SCALE 1" = 50'

DRILLING W.O.




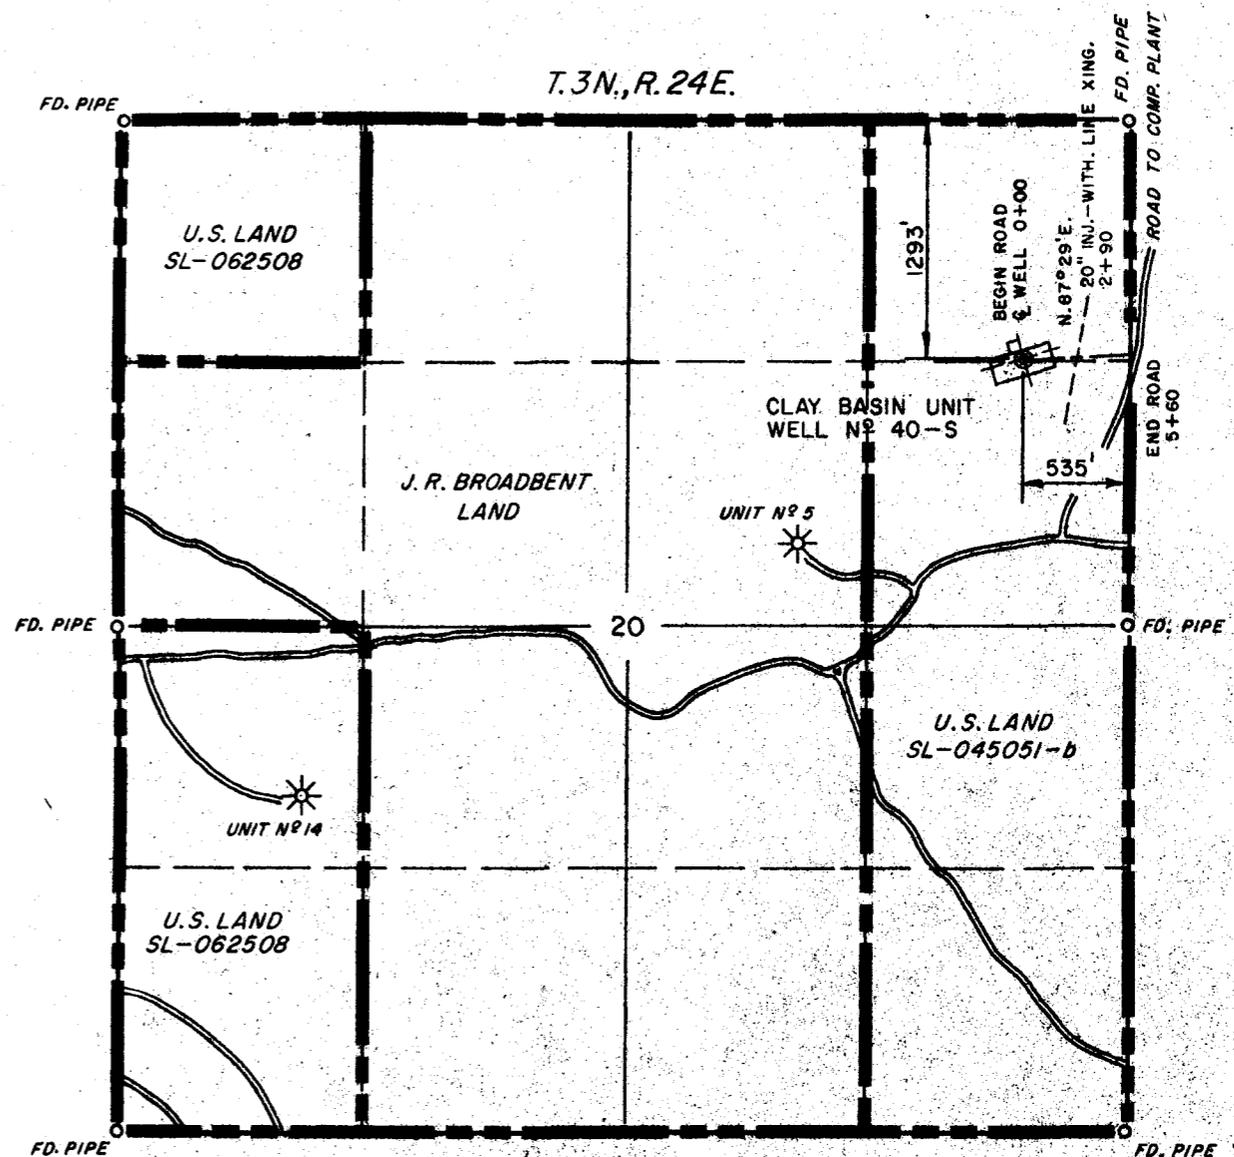


LOCATION PLAN
SCALE 1" = 1000'

This is to certify that the above plat was prepared from field notes of actual surveys made by me or under my supervision and that the same are true and correct to the best of my knowledge.

Springland
ENGINEER
UTAH REGISTRATION L.S. N° 3521

LEGEND	ENGINEERING RECORD		REVISIONS				MOUNTAIN FUEL RESOURCES, INC.
	SURVEYED BY	REFERENCES	NO.	DESCRIPTION	DATE	BY	
<ul style="list-style-type: none"> ⊕ WELL ⊕ STONE CORNER ⊕ PIPE CORNER 	FRED HANKING	G.L.O. PLAT <input checked="" type="checkbox"/> U.S.G.S. QUAD. MAP <input type="checkbox"/>					CERTIFIED WELL LOCATION AND WELL SITE PLAN CLAY BASIN UNIT WELL N° 40-S
	2-2-77						
	LOCATION DATA						DRAWN: 2-25-77 G&B SCALE: AS NOTED CHECKED: G&L SMT DRWG. NO. M-12450 APPROVED: RWJ
	FIELD	CLAY BASIN					
	LOCATION: NE 1/4, NE 1/4, SEC. 20, T.3N., R.24E. SALT LAKE MERIDIAN, 1293' FNL, 535' FEL						SHEET OF 2
	DAGGETT COUNTY, UTAH						
	WELL ELEVATION: 6356 (AS GRADED) BY ELECTRONIC VERTICAL ANGLE ELEVATIONS FROM M.F.S. Co. BENCH MARK 4 120.						

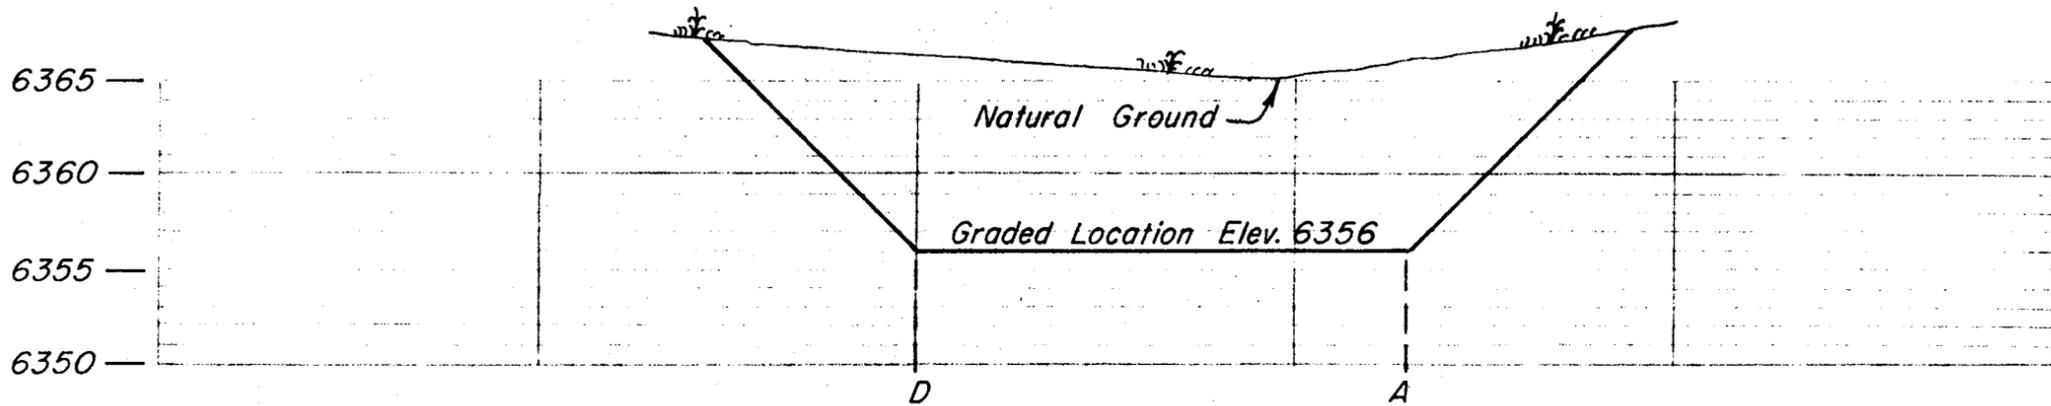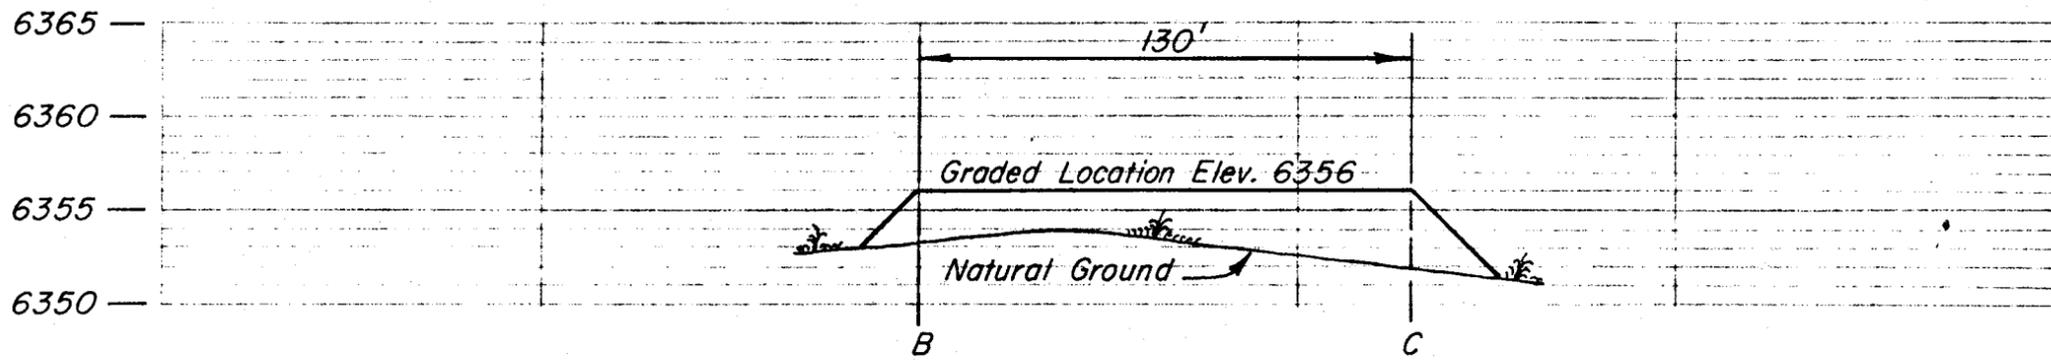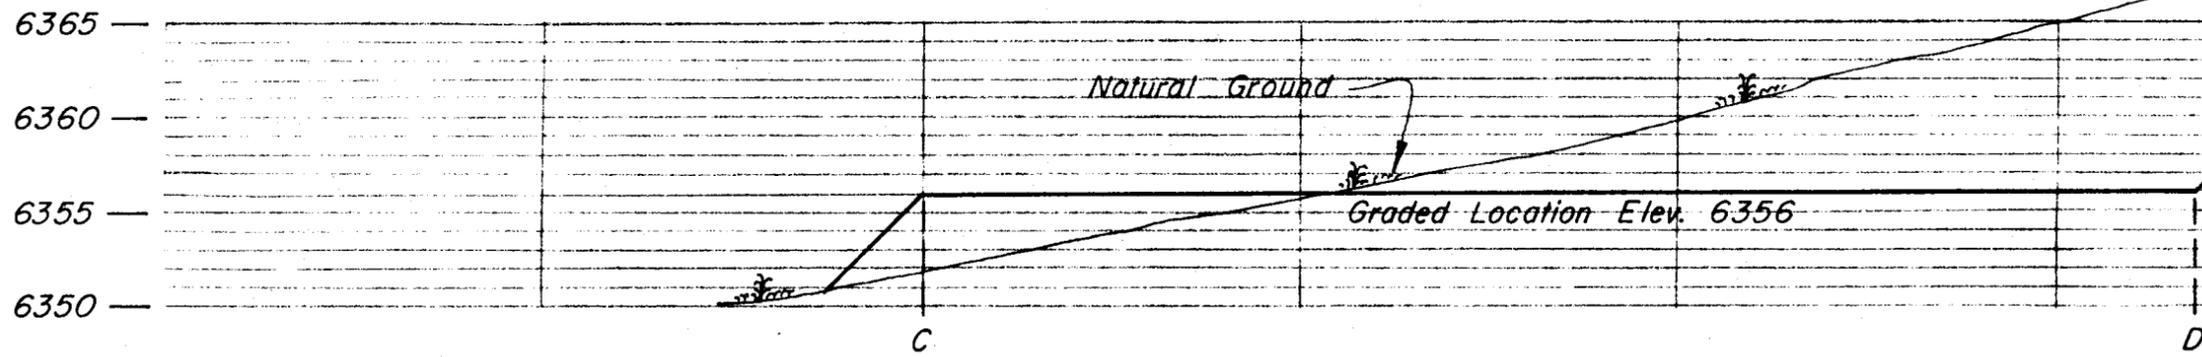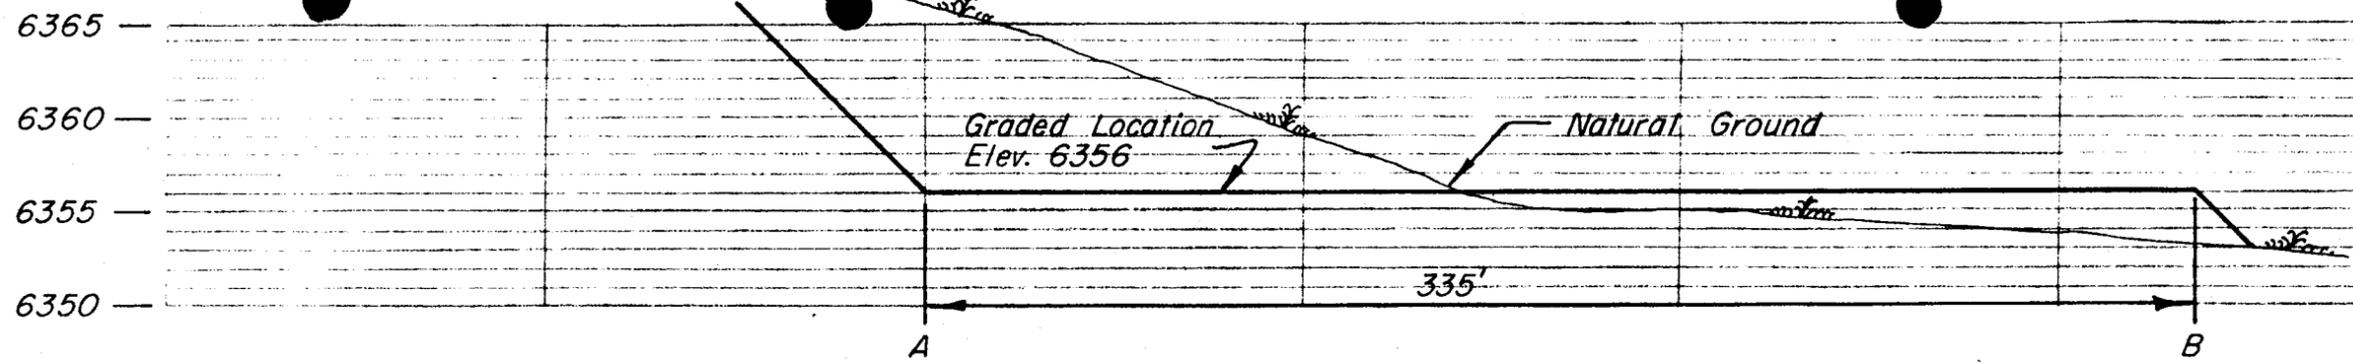

— PROFILE SECTIONS —
 PROPOSED GRADED LOCATION
 HORIZ. 1" = 50'
 VERT. 1" = 10'

INTEROFFICE COMMUNICATION

FROM T. M. Colson

Rock Springs, Wyoming
City STATE

TO R. G. Myers

DATE April 18, 1977

SUBJECT Tentative Plan to Drill
Unit Well No. 40-S
Clay Basin Field

Attached for your information and files is a tentative plan to drill the above-captioned well. This plan was written in accordance with the Geologic Prognosis dated February 11, 1977.

TMC/gm
Attachment

- cc: R. D. Cash
- E. R. Keller (3)
- G. A. Peppinger (3)
- A. J. Marushack
- A. K. Zuehlsdorff
- D. E. Dallas
- A. J. Maser (3)
- J. E. Adney
- E. J. Widic
- B. M. Steigleder
- E. A. Farmer
- D. L. Reese
- U.S.G.S.
- State
- Paul Zubatch
- P. E. Files (4)



From Pat Brotherton

Rock Springs, Wyoming

To: T. M. Colson

April 18, 1977

Tentative Plan to Drill
Unit Well No. 40-S
Clay Basin Field

This well will be drilled to total depth by _____ Drilling Company. One work order has been originated for the drilling and completion of this well, namely 20050, Drill Unit Well No. 40-S, Clay Basin Field, located in the NE NE Sec. 20, T. 3 N., R. 24 E., Daggett County, Utah. An 8-3/4-inch hole will be drilled to a total depth of 5807 feet and 7-inch O.D. casing run. It is planned to complete the well as a gas storage well in the Dakota formation. Surface elevation is at 6356 feet.

1. Drill 12-1/4-inch hole to approximately 330 feet KBM.
2. Run and cement approximately 300 feet of 9-5/8-inch O.D., 36-pound, K-55, 8 round thread, LT&C casing. The casing will be cemented by Halliburton with 165 sacks of regular Type "G" cement with 3 percent calcium chloride, which represents theoretical requirements plus 100 percent excess cement for 9-5/8-inch O.D. casing in 12-1/4-inch hole with cement returned to surface. Plan on leaving a 10 foot cement plug in the bottom of the casing after displacement is completed. Floating equipment will consist of a Baker guide shoe. The top and bottom of all casing collars will be spot welded in the field and the guide shoe will be spot welded to the shoe joint in the Rock Springs Machine Shop. The bottom of the surface casing should be landed in such a manner that the top of the 10-inch 3000 psi casing flange will be at ground level. A cellar three feet deep will be required. Prior to cementing, circulate 50 barrels of mud. Capacity of the 9-5/8-inch O.D. casing is 24 barrels.
3. After a WOC time of 6 hours, remove the landing joint and wash off casing collar. Install a NSCo. Type "B" 10-inch 3000 psi regular duty casing flange tapped for 9-5/8-inch O.D. casing. Install a 2-inch extra heavy nipple, 6-inches long, and a Demco (2000 psi WOG, 4000 psi test) ball valve on one side outlet of the casing

flange and a 2-inch extra heavy bull plug in the opposite side. Install a 10-inch 3000 psi double gate hydraulically operated blowout preventer with blind rams in the bottom and 4-1/2-inch rams in the top and finish nipping up. After a WOC time of 12 hours, pressure test surface casing, all preventer rams, and Kelly-cock to 1000 psi for 15 minutes using rig pump and drilling mud. The burst pressure rating for 9-5/8-inch O.D., 36-pound, K-55, 8 round thread, LT&C casing is 3520 psi.

4. Drill 8-3/4-inch hole to the total depth of 5807 feet or to such depth as the Geological Department may recommend. The mud will consist of 2 percent potassium chloride water to 4500 feet. Mud up with the potassium Dexdrid Drispac system at this point to allow a 10 cc. water loss at 5725 feet. The 10 cc. water loss will be maintained to total depth at 5807 feet. If lost circulation is encountered only acid soluble lost circulation material will be used. A mud cleaner will be used from surface to total depth to remove undesirable solids from the mud system and to keep the mud weight to a minimum. A Company Geologist will be on location to check cutting samples; 10 foot samples from 5100 feet to total depth. Anticipated tops are as follows:

	<u>Approximate Depth</u> <u>(Feet KBM)</u>
Mancos	Surface
Frontier	5,277
Mowry	5,477
Dakota	5,607
Morrison	5,737
Total Depth	5,807

Objective Reservoir: Dakota Formation

Other Possible

Producing Zones: Frontier Formation

5. Run laterolog 7 with a split 4-decade logarithmic scale from surface casing to total depth. Run a compensated density/gamma ray/caliper from total depth at 5807 feet to 3807 feet. The 2000 feet logged represents the minimum footage for the log.
6. Assuming gas storage zones of good quality are present as indicated by log analysis, go into hole with 8-3/4-inch bit and drill pipe to total depth to condition mud prior to running production casing. Pull bit laying down drill pipe and drill collars.
7. Run 7-inch O.D. casing as outlined in Item No. I, General Information, through the deepest producing zone as indicated by log analysis. A Baker 7-inch O.D., 8 round thread, Type G circulating differential fillup collar and guide shoe will be run as floating equipment. Rig up Halliburton and cement casing with 50-50 Pozmix "A" cement. Bring cement top behind the 7-inch O.D. casing 1000 feet above the uppermost producing zone as indicated by log analysis. Circulate 300 barrels of drilling mud prior to beginning cementing operations. Capacity of the 7-inch O.D. casing is approximately 228 barrels. Cement requirements will be based on actual hole size as determined by the caliper portion of the formation density log. Rotate casing while circulating, mixing, and displacing cement. Displace cement with water. Bump plug with 2500 psi and hold for 15 minutes to pressure test casing. Minimum burst pressure of the 7-inch O.D., 23-pound, K-55 casing is 4360 psi.
8. Immediately after cementing operations are completed, land the 7-inch O.D. casing with full weight of casing on slips in the 10-inch 3000 psi casing flange and record indicator weight. Install NSCo. Type DP-7, 10-inch 3000 psi by 6-inch

3000 psi tubing spool. Pressure test primary and secondary seals to 2500 psi for 5 minutes. Minimum collapse pressure for 7-inch O.D., 23-pound, K-55, 8 round thread, LT&C casing is 3280 psi. Install a steel plate on the 6-inch 3000 psi tubing spool flange.

9. Release drilling rig and move off location.
10. Move in and rig up a completion rig.
11. Install a 6-inch 5000 psi hydraulically operated double gate preventer with blind rams on bottom and 2-3/8-inch tubing rams on top.
12. After a WOC time of at least 50 hours, rig up Dresser Atlas and run bond log and perforating formation control log from plugged back depth to top of cement behind the 7-inch O.D. casing.
13. After a WOC time of at least 56 hours, pick up and run a 6-1/4-inch bit on 2-3/8-inch O.D., 4.7-pound, V-55, 8 round thread, EUE tubing to check plugged back depth. Rig up and displace drilling mud out of hole with drip oil. Pull and lay down 2-3/8-inch O.D. tubing.
14. Rig up Dresser Atlas perforating truck and perforate the Dakota storage sand with 2 HPF jumbo jet shots. The interval to be perforated will be chosen after the open hole logging has been reviewed and evaluated.
15. Rig up Dresser Atlas and run a Baker Model FB-1 packer (size 87-40) as follows:
 - Baker Model FB-1 packer (4.0-inch I.D. through packer).
 - 6 foot Baker millout extension (4.0-inch I.D.).
 - 10 foot Baker seal bore protector (4.0-inch I.D.) changeover.
 - 6 foot 3-1/2-inch O.D., 9.2-pound, J-55, 8 round EUE pup joint.
 - Baker Model "F" non-ported seating nipple (size 2.81).

6 foot 3-1/2-inch O.D., 9.2-pound, J-55, 8 round EUE pup joint.

Baker Model "R" non-ported no-go seating nipple (size 2.75).

Set packer so that the bottom of the assembly is 30 feet above the perforations.

Perforations will be chosen after the open-hole logging is completed.

16. Install 4-1/2-inch rams in preventer. Pick up a Baker locator seal assembly and a Baker Model "L" sliding sleeve and run tubing as follows:

1 NSCo. DP4-H-1 tubing hanger tapped 4-1/2-inch O.D., 8 round thread, LT&C, top and bottom.

4-1/2-inch O.D., 11.6-pound, J-55, 8 round thread, LT&C pup joints, as required to space out.

Approximately 187 joints 4-1/2-inch O.D., 11.6-pound, J-55, 8 round thread, LT&C tubing.

Baker Model "L" 4-1/2-inch O.D. sliding sleeve (size 3.812), in open position.

1 6 foot 4-1/2-inch O.D., 11.6-pound, J-55 pup joint.

Baker Model "G" locator seal assembly with 10 feet of seal extensions (I.D. 3.0-inches).

Land tubing in packer with 10,000 pounds compression. Space out and land in wellhead.

17. Install upper portion of wellhead.

18. Swab fluid out of wellbore. Run a short production test.

GENERAL INFORMATION

I. The following tubular goods have been assigned to the well.

<u>Description</u>	<u>Approximate Gross Measurement (feet)</u>	<u>Availability</u>
	<u>Surface Casing</u>	
9-5/8-inch O.D., 36-pound, K-55, 8 round thread, LT&C casing	330	Warehouse Stock
	<u>Production Casing</u>	
7-inch O.D., 23-pound, K-55, 8 round thread, LT&C casing (Bottom 400 feet will be rough coated)	5,900	Warehouse Stock
	<u>Production Tubing</u>	
4-1/2-inch O.D., 11.6-pound, J-55, 8 round thread, LT&C tubing	5,900	Warehouse Stock

II. All ram type preventers will have hand wheels installed and operative at the time the preventers are installed.

III. Well responsibility - D. L. Reese or G. G. Francis.

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPPLICATE*
(Other instructions on reverse side)

Form approved.
Budget Bureau No. 42-R1424.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. <input type="checkbox"/> OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <u>Gas Storage</u>		5. LEASE DESIGNATION AND SERIAL NO. <u>SLC 045051 b</u>
2. NAME OF OPERATOR <u>Mountain Fuel Resources, Inc.</u>		6. IF INDIAN, ALLOTTEE OR TRIBE NAME -
3. ADDRESS OF OPERATOR <u>P. O. Box 1129, Rock Springs, Wyoming 82901</u>		7. UNIT AGREEMENT NAME <u>Clay Basin Gas Storage Agreement</u>
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface <u>1293' FNL, 535' FEL NE NE</u>		8. FARM OR LEASE NAME <u>Unit Well</u>
14. PERMIT NO. <u>API No.: 43-009-30031</u>	15. ELEVATIONS (Show whether DF, RT, GR, etc.) <u>KB 6373.60' GR 6356'</u>	9. WELL NO. <u>40-S</u>
		10. FIELD AND POOL, OR WILDCAT <u>Clay Basin Gas Storage</u>
		11. SEC., T., R., M., OR BLE. AND SURVEY OR AREA <u>NE NE 20-3N-24E</u>
		12. COUNTY OR PARISH 13. STATE <u>Daggett Utah</u>

RECEIVED
APR 28 1977
GAS & MINING

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF <input type="checkbox"/>	PULL OR ALTER CASING <input type="checkbox"/>	WATER SHUT-OFF <input type="checkbox"/>	REPAIRING WELL <input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	MULTIPLE COMPLETE <input type="checkbox"/>	FRACTURE TREATMENT <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	ABANDON* <input type="checkbox"/>	SHOOTING OR ACIDIZING <input type="checkbox"/>	ABANDONMENT* <input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	(Other) <u>Supplementary history</u>	<input checked="" type="checkbox"/>
(Other) <input type="checkbox"/>		(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)	

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

TD 5870', spudded April 19, 1977, landed 9-5/8"OD, 36#, K-55, ST&C casing at 268.31' KBM and set with 180 sacks regular type G cement treated with 3% calcium chloride, full returns while mixing and displacing, returned 10 barrels slurry to surface, cement in place March 30, 1977, logging.

18. I hereby certify that the foregoing is true and correct

SIGNED *R. S. Myers* TITLE Manager, Drilling and Petroleum Engineering DATE April 27, 1977

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN DUPLICATE*

(See other instructions on reverse side)

Form approved.
Budget Bureau No. 42-R355.5.

WELL COMPLETION OR RECOMPLETION REPORT AND LOG *

5. LEASE DESIGNATION AND SERIAL NO.
SLC 045051 b

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME
Clay Basin Gas Storage Agreement

8. FARM OR LEASE NAME
Unit Well

9. WELL NO.
40-S

10. FIELD AND POOL, OR WILDCAT
Clay Basin Gas Storage

11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA
NE NE 20-3N-24E

12. COUNTY OR PARISH
Daggett

13. STATE
Utah

14. PERMIT NO. - DATE ISSUED -

15. DATE SPUDDED 4-19-77

16. DATE T.D. REACHED 4-25-77

17. DATE COMPL. (Ready to prod.) 5-7-77

18. ELEVATIONS (DF, RKB, RT, GR, ETC.)*
KB 6373.60' GR 6356'

19. ELEV. CASINGHEAD -

20. TOTAL DEPTH, MD & TVD 5870

21. PLUG, BACK T.D., MD & TVD 5819

22. IF MULTIPLE COMPL., HOW MANY* -

23. INTERVALS DRILLED BY - ROTARY TOOLS 0-5870'

24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)*
5625-5640' and 5645-5669' Dakota

25. WAS DIRECTIONAL SURVEY MADE No

26. TYPE ELECTRIC AND OTHER LOGS RUN
Compensated Densilog, Dual Laterolog

27. WAS WELL CORED No

28. CASING RECORD (Report all strings set in well)

CASING SIZE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
9-5/8"	36	268.31	12-1/4	180	0
7	23	5844.66	8-3/4	550	0

29. LINER RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)

30. TUBING RECORD

SIZE	DEPTH SET (MD)	PACKER SET (MD)
4-1/2	5535.15	5525

31. PERFORATION RECORD (Interval, size and number)
5625-5640' & 5645-5669', jumbo jet, 2 holes per foot

32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED

33.* PRODUCTION

DATE FIRST PRODUCTION Shut in

PRODUCTION METHOD (Flowing, gas lift, pumping—size and type of pump) Flowing - GAS STORAGE

WELL STATUS (Producing or shut-in) SI

DATE OF TEST	HOURS TESTED	CHOKE SIZE	PROD'N. FOR TEST PERIOD	OIL—BBL.	GAS—MCF.	WATER—BBL.	GAS-OIL RATIO

FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE	OIL—BBL.	GAS—MCF.	WATER—BBL.	OIL GRAVITY-API (CORR.)

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.) TEST WITNESSED BY

RECEIVED
MAY 13 1977
DIVISION OF OIL & GAS

35. LIST OF ATTACHMENTS

Logs as above, Well Completion to be sent at a later date.

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED: B. G. Meyer TITLE Manager, Drilling and Petroleum Engineering DATE May 10, 1977

INSTRUCTIONS

General: This form is designed for submitting a complete and correct well completion report and log on all types of lands and leases to either a Federal agency or a State agency, or both, pursuant to applicable Federal and/or State laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office. See instructions on items 22 and 24, and 33, below regarding separate reports for separate completions.

If not filed prior to the time this summary record is submitted, copies of all currently available logs (drillers, geologists, sample and core analysis, all types electric, etc.), formation and pressure tests, and directional surveys, should be attached hereto, to the extent required by applicable Federal and/or State laws and regulations. All attachments should be listed on this form, see item 35.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 18: Indicate which elevation is used as reference (where not otherwise shown) for depth measurements given in other spaces on this form and in any attachments. **Items 22 and 24:** If this well is completed for separate production from more than one interval zone (multiple completion), so state in item 22, and in item 24 show the producing interval, or intervals, top(s), bottom(s) and name(s) (if any) for only the interval reported in item 33. Submit a separate report (page) on this form, adequately identified, for each additional interval to be separately produced, showing the additional data pertinent to such interval.

Item 29: "Sacks Cement": Attached supplemental records for this well should show the details of any multiple stage cementing and the location of the cementing tool.

Item 33: Submit a separate completion report on this form for each interval to be separately produced. (See instruction for items 22 and 24 above.)

FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	GEOLOGIC MARKERS	
				NAME	MEAS. DEPTH
					TRUE VERT. DEPTH
				Log tops:	
				Mancos	0'
				Frontier	5268'
				Mowry	5458'
				Dakota	5619'
				Morrison	5816'

COMPLETION REPORT

Well: Clay Basin Unit No. 40-S Date: October 5, 1977

Area: Clay Basin Lease No: SLC 045051 b

- New Field Wildcat
- Development Well
- Shallower Pool Test
- New Pool Wildcat
- Gas Storage
- Deeper Pool Test
- Extension

Location: 1293 feet from North line, 535 feet from East line
NE $\frac{1}{4}$ NE $\frac{1}{4}$

Section 20, Township 3 North, Range 24 East

County: Daggett State: Utah

Operator: Mountain Fuel Resources, Inc.

Elevation: KB 6373.60 Gr 6356 Total Depth: Driller 5870 Log 5858

Drilling Commenced: April 19, 1977 Drilling Completed: April 25, 1977

Rig Released: April 27, 1977 Well Completed: May 7, 1977

Sample Tops: (unadjusted)

Log Tops:

Mancos	Surface
Frontier	5268 (1106)
Mowry	5458 (916)
Dakota	5619 (755)
Morrison	5816 (558)

Sample Cuttings: None

Status: Gas storage injection/withdrawal well

Producing Formation: Dakota

Perforations: 5625-5640, 5645-5669, jumbo jet, 2 holes per foot

Stimulation: None

Production: None reported

Plug Back Depth: 5819

Plugs: None

Hole Size: 12-1/4" to 267; 8-3/4" to 5870

Casing/Tubing: 9-5/8" to 268.31, 7" to 5844.66; 4-1/2" to 5535.15 with packer set at 5525

Logging - Mud: None

Mechanical: Compensated Densilog (3800-5856), Dual Laterolog (266-5856), Cement Bond Log (3200-5806)

Contractor: Signal Drilling Company

Completion Report Prepared by: M. L. Tomac

Remarks: API No. 4300930031



COMPLETION REPORT (cont.)

Well: Unit No. 40-S

Area: Clay Basin

Cored Intervals (recovery): None

Tabulation of Drill Stem Tests: None



<u>No.</u>	<u>Interval</u>	<u>IHP</u>	<u>IFP (min.)</u>	<u>ISIP (min.)</u>	<u>FFP (min.)</u>	<u>FSIP (min.)</u>	<u>FHP</u>	<u>Samples Caught</u>	<u>Remarks</u>
------------	-----------------	------------	-------------------	--------------------	-------------------	--------------------	------------	-----------------------	----------------

Clay Basin U# 40-2 Sec 20, 31N, 24E

Bubly 15 June 88



access

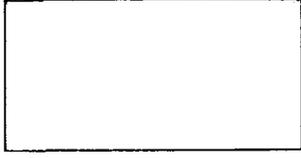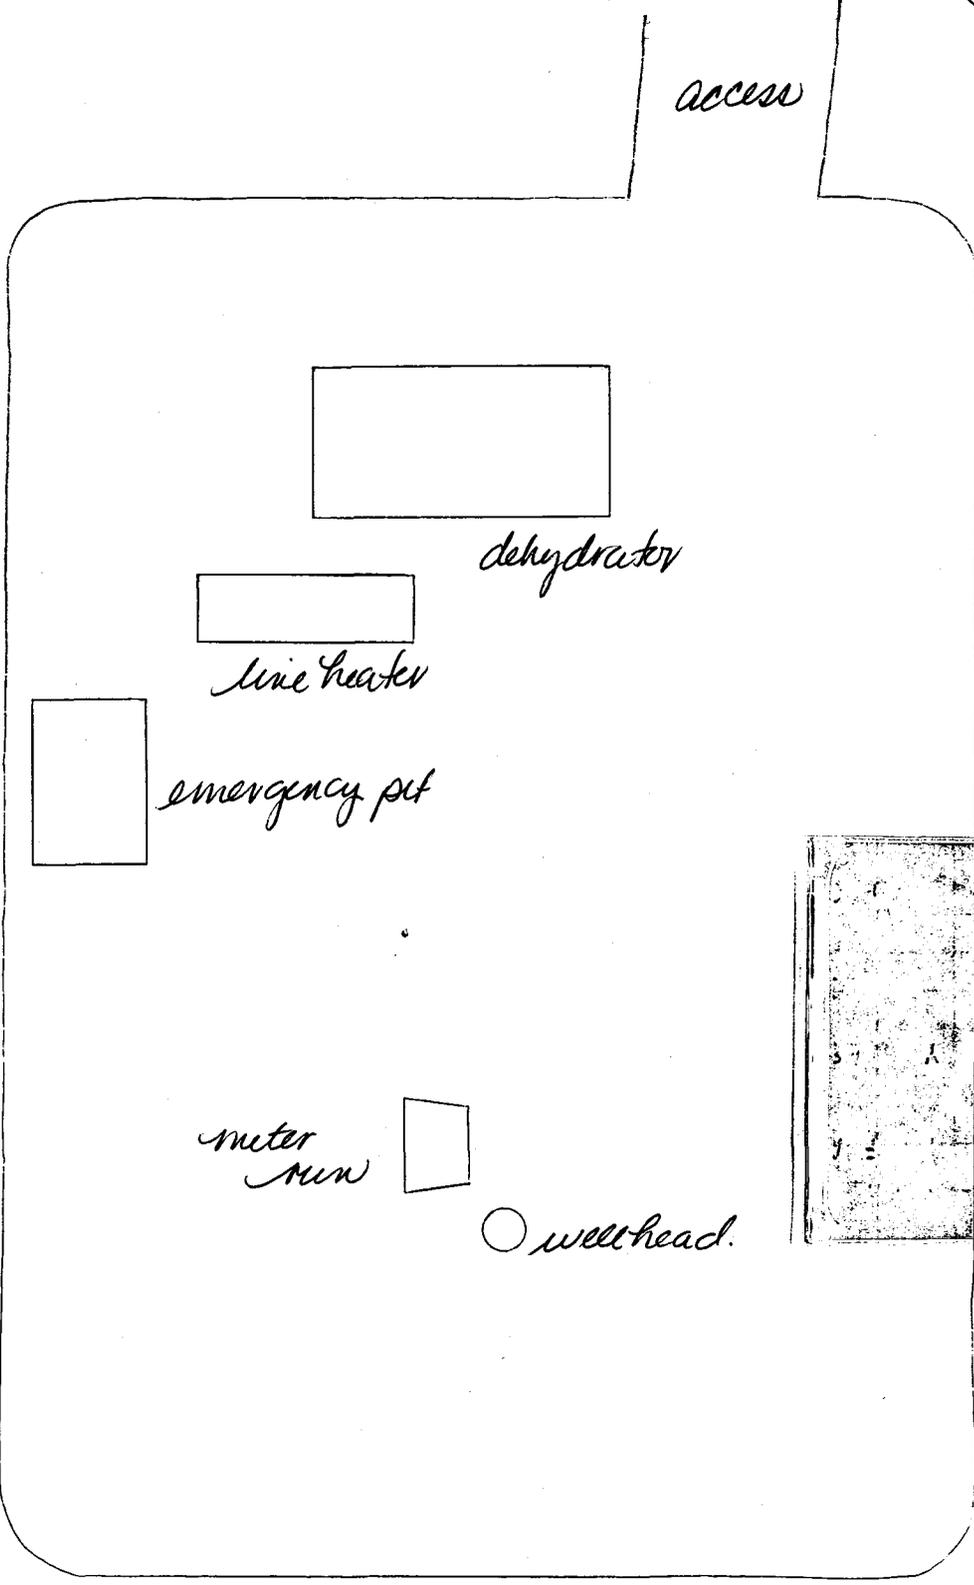

dehydrator



line heater




emergency pit




meter run

wellhead.

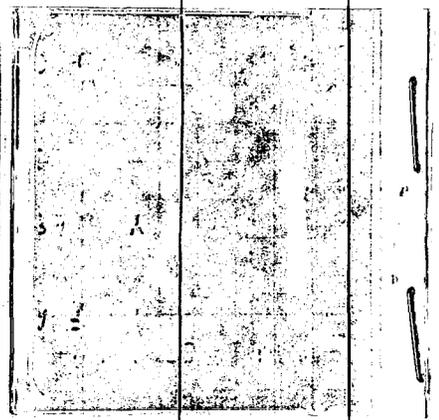

42,381 50 SHEETS 5 SQUARE
42,382 100 SHEETS 5 SQUARE
42,383 200 SHEETS 5 SQUARE
MADE IN U.S.A.
NATIONAL



QUESTAR PIPELINE COMPANY

79 SOUTH STATE STREET • P. O. BOX 11450 • SALT LAKE CITY, UTAH 84147 • PHONE (801) 530-2400
June 23, 1988

CERTIFIED MAIL
RETURNED RECEIPT REQUESTED
#P 879 571 459

Bureau of Land Management
Utah State Office
CFS Financial Center
324 S. State Street
Salt Lake City, UT 84111-2303

Re: Name Change
Mountain Fuel Resources, Inc.
to Questar Pipeline Company

REC'D JUN 28 AM 9:00
BUREAU OF LAND MANAGEMENT
SALT LAKE CITY, UTAH

Gentlemen:

Enclosed for your files and information is a certified copy of the Articles of Amendment to the Articles of Incorporation of Mountain Fuel Resources, Inc. dated March 7, 1988, indicating that Mountain Fuel Resources, Inc. changed its name to Questar Pipeline Company.

Questar Pipeline Company holds interests in the following Federal Oil and Gas Leases in Utah:

Now wells on gas held.
with CA
 CA well - RT - OR's Mt. Fuel Resources - U²9712-A - Questar 100%
 U-11246 Agreement pending to "Questar Energy Co"
 SLC-045051(A) -> OR'S
 SLC-045051(B) -> OR'S
 SLC-045053(A) -> OR'S
 SLC-045053(B) -> OR'S
 SLC-062508 - OR'S
 SLC-070555 - OR'S
 SLC-070555(A) - OR'S
 ? Agreement No. 14-08-0001-16009
 (Clay Basin Gas Storage Agreement)

Please note and adjust your records in accordance with the above and furnish verification of your receipt of this notice to the undersigned.

Sincerely,

J. B. Neese
Senior Landman

JBN/sdg

Enclosure

List of Leases

Overriding Royalties

U-09712-A
U-011246

Operating Rights

SL-045051-A & B
SL-045053-A & B
SL-062508
SL-0700555
SL-070555-A
SL-045049-A & B

Clay Basin Gas Storage Agreement
Agreement No. 14-08-0001-16009

3100
U-09712-A
et al
(U-942)
C. Seare
3/9/89

DECISION

Questar Pipeline Company : Oil and Gas Leases
P.O. Box 11450 : U-09712-A et al
Salt Lake City, Utah 84147 :

Corporate Name Change Recognized

Acceptable evidence has been received establishing that Mountain Fuel Resources, Inc. has changed their name to Questar Pipeline Company. Accordingly, the surviving company, Questar Pipeline Company, is recognized as holding all interests in Federal oil and gas leases which were held by Mountain Fuel Resources, Inc. We are changing our records with respect to the attached listing of oil and gas leases. If there are any other leases that will be affected, please contact this office.

/s/ M. Willis

ACTING Chief, Minerals
Adjudication Section

Enclosure
List of Leases

cc: All District Offices, Utah
MMS, AFS
MMS, BRASS
920, Teresa Thompson
Clay Basin Unit File

CSeare:s1 3/9/89:1642f

RECEIVED

JAN 28 2004

DIV. OF OIL, GAS & MINING

OPERATOR CHANGE WORKSHEET

ROUTING

1. GLH
2. CDW
3. FILE

Change of Operator (Well Sold)

Designation of Agent/Operator

X Operator Name Change

Merger

The operator of the well(s) listed below has changed, effective:		3/7/1988
FROM: (Old Operator):	TO: (New Operator):	
N1070-Wexpro Company PO Box 45360 Salt Lake City, UT 84145-0360 Phone: 1-(801) 534-5267	N7560-Questar Pipeline Company PO Box 11450 Salt Lake City, UT 84147 Phone: 1-(801) 530-2019	

CA No.

Unit:

WELL(S)									
NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS	
COALVILLE GAS STORAGE 8	10	020N	050E	4304330192	99990	Fee	GS	A	
COALVILLE GAS STORAGE 9	10	020N	050E	4304330193	99990	Fee	GS	A	
COALVILLE GAS STORAGE 10	10	020N	050E	4304330244	99990	Fee	GS	A	
COALVILLE GAS STORAGE 12	09	020N	050E	4304330249	99990	Fee	GS	A	
CLAY BASIN UNIT 5	20	030N	240E	4300915629	1025	Fee	GS	A	
CLAY BASIN UNIT 3	16	030N	240E	4300915627	1025	State	GS	A	
CLAY BASIN UNIT 27-S	16	030N	240E	4300930018	1025	State	GS	A	
CLAY BASIN UNIT 52-S	16	030N	240E	4300930048	1025	State	GS	A	
CLAY BASIN UNIT 53-S	16	030N	240E	4300930049	1025	State	GS	A	
CLAY BASIN UNIT 59-S	16	030N	240E	4300930055	1025	State	GS	A	
CLAY BASIN UNIT 35-S	17	030N	240E	4300930026	1025	Federal	GS	A	
CLAY BASIN UNIT 40-S	20	030N	240E	4300930031	1025	Federal	GS	A	
CLAY BASIN UNIT 49-S	20	030N	240E	4300930045	1025	Federal	GS	A	
CLAY BASIN UNIT 2	21	030N	240E	4300915626	1025	Federal	GS	A	
CLAY BASIN 24-S	21	030N	240E	4300930015	1025	Federal	GS	A	
CLAY BASIN UNIT 25-S	21	030N	240E	4300930016	1025	Federal	GS	A	
CLAY BASIN UNIT 26-S	21	030N	240E	4300930017	1025	Federal	GS	A	
CLAY BASIN 30-S	21	030N	240E	4300930019	1025	Federal	GS	A	
CLAY BASIN UNIT 33-S	21	030N	240E	4300930024	1025	Federal	GS	A	

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 1/13/2004
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 1/13/2004
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 1/14/2004
- Is the new operator registered in the State of Utah: YES Business Number: 649172-0142
- If **NO**, the operator was contacted on: _____

6. (R649-9-2)Waste Management Plan has been received on:

IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: 3/9/1989

8. **Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: n/a

9. **Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: n/a

10. **Underground Injection Control ("UIC"** The Division has approved UIC Form 5, **Transfer of Authority to Inject,** for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

DATA ENTRY:

- 1. Changes entered in the **Oil and Gas Database** on: 1/29/2004
- 2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 1/29/2004
- 3. Bond information entered in RBDMS on: 1/29/2004
- 4. Fee wells attached to bond in RBDMS on: 1/29/2004
- 5. Injection Projects to new operator in RBDMS on: n/a

STATE WELL(S) BOND VERIFICATION:

1. State well(s) covered by Bond Number: 965003032

FEDERAL WELL(S) BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: 965002976

INDIAN WELL(S) BOND VERIFICATION:

1. Indian well(s) covered by Bond Number: n/a

FEE WELL(S) BOND VERIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number 965003033

2. The **FORMER** operator has requested a release of liability from their bond on: N/A
The Division sent response by letter on: N/A

LEASE INTEREST OWNER NOTIFICATION:

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 1/29/2004

COMMENTS:

NEW ENTITY NUMBERS ASSIGNED FEBRUARY 2004

ACCT	OPERATOR NAME	API NUM.	Sec	Twncshp	Rng	WELL NAME	ENTITY	EFF DATE	REASON
N7560	Questar Pipeline Co	4300915629	20	030N	240E	Clay Basin Unit 5	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300915627	16	030N	240E	Clay Basin Unit 3	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930018	16	030N	240E	Clay Basin Unit 27-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930048	16	030N	240E	Clay Basin Unit 52-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930049	16	030N	240E	Clay Basin Unit 53-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930055	16	030N	240E	Clay Basin Unit 59-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930026	17	030N	240E	Clay Basin Unit 35-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930031	20	030N	240E	Clay Basin Unit 40-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930045	20	030N	240E	Clay Basin Unit 49-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300915626	21	030N	240E	Clay Basin Unit 2	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930015	21	030N	240E	Clay Basin 24-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930016	21	030N	240E	Clay Basin Unit 25-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930017	21	030N	240E	Clay Basin Unit 26-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930019	21	030N	240E	Clay Basin 30-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930024	21	030N	240E	Clay Basin Unit 33-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930030	21	030N	240E	Clay Basin Unit 39-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930044	21	030N	240E	Clay Basin Unit 48-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930046	21	030N	240E	Clay Basin Unit 50-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930047	21	030N	240E	Clay Basin Unit 51-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930054	21	030N	240E	Clay Basin Unit 58-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930056	21	030N	240E	Clay Basin Unit 60-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300915635	22	030N	240E	Clay Basin U 11 (RD Murphy)	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930021	22	030N	240E	Clay Basin 28-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930023	22	030N	240E	Clay Basin Unit 32-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage
N7560	Questar Pipeline Co	4300930027	22	030N	240E	Clay Basin Unit 36-S	1025 to 14040	2/10/2004	Clay Basin Gas Storage

Note to file: These entity numbers
were changed to compliment the
operator correction from 3/7/98