

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT
(highlight changes)

001

APPLICATION FOR PERMIT TO DRILL				5. MINERAL LEASE NO. UTU-80561	6. SURFACE: FEDERAL
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>				7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>				8. UNIT or CA AGREEMENT NAME:	
2. NAME OF OPERATOR: WESTPORT OIL AND GAS COMPANY, L. P.				9. WELL NAME and NUMBER: Wellington Federal 32-6	
3. ADDRESS OF OPERATOR:		CITY STATE ZIP	PHONE NUMBER	10. FIELD AND POOL, OR WILDCAT:	
1670 Broadway - Suite 2800		Denver, CO 80202-4800	(303) 573-5404	Helper Field - Ferron Coal	
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 1854' FNL, 1625' FEL: 522524 X - 110, 72585 AT PROPOSED PRODUCING ZONE: Same				11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWNE, Sec. 6, T 14 S, R 11 E, S.L.B.&M.	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: approximately 6.9 miles ESE from Price, UT				12. COUNTY: Carbon	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 1625'		16. NUMBER OF ACRES IN LEASE: 490 acres		17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 160 acres	
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) ~1000'		19. PROPOSED DEPTH: 2770'		20. BOND DESCRIPTION: BLM Nationwide Bond No. 158624364	
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 6150' Ungraded Ground Level		22. APPROXIMATE DATE WORK WILL START: Upon APD Approval		23. ESTIMATED DURATION: 5 days drilling plus 9 days completion	

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT	SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT
12.25"	9.625", J-55, 40 ppf	0 - 277'	134 sx of Prem Plus, 2% Calcium Chloride, 0.25#/sx Poly E Flake, 15.6 ppg, Yield = 1.18cu ft / sx, enough volume to raise cmt to surface.
7.875"	5.5", K-55, 15.5 ppf	0 - TD	748 sx of 50/50 Prem/Poz, 10% Cal-Seal, 1% Calcium Chloride, 0.25#/sx Poly E Flake, 12.5 ppg to 14.2 ppg, Yield = 1.97 cu ft /sx to 1.60 cu ft /sx, enough volume to raise cmt to surface casing.

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:


- | | |
|--|--|
| <input checked="" type="checkbox"/> WELL PLAN OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER | <input checked="" type="checkbox"/> COMPLETE DRILLING PLAN |
| <input type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER | <input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER |

NAME (PLEASE PRINT)

Daniel S. Carroll

Senior Engineer

SIGNATURE

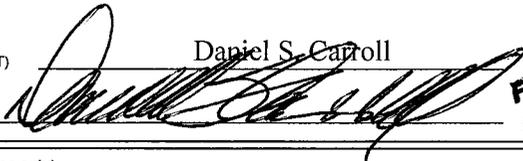

Federal Approval of this Action is Necessary

DATE

May 5, 2003

(This space for State use only)


API NUMBER ASSIGNED:

43-007-30895

Approved by the Utah Division of Oil, Gas and Mining

Date: 07-08-03

By:

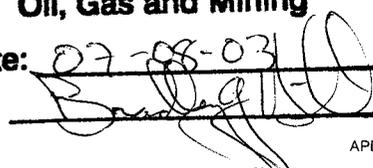

RECEIVED

MAY 15 2003

DIV. OF OIL, GAS & MINING

(11/2001)

T14S, R11E, S.L.B.&M.

WESTPORT RESOURCES CORP.

Well location, WELLINGTON FEDERAL #32-6, located shown in the SW 1/4 NE 1/4 of Section 6, T14S, R11E, S.L.B.&M. Carbon County, Utah.

R
10
E

R
11
E

S01°31'W - 40.39 (G.L.O.)

S87°40'01"W - 2730.74' (Meas.) T13S
S87°39'04"W - 2708.69' (Meas.) T14S



West 1/4 Cor. Sec. 32, 1965
Brass Cap, Pile of Stone, Bearing Tree

S89°34'02"E - 2616.07' (Meas.)

North 1/4 Cor. Sec. 5
1965 Brass Cap, Flush with Ground, Pile of Stones

BASIS OF ELEVATION

SPOT ELEVATION LOCATED ON A JEEP TRAIL IN THE NW 1/4 OF SECTION 32, T13S, R11E, S.L.B.&M. TAKEN FROM THE DEADMAN CANYON QUADRANGLE, UTAH, CARBON COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 6460 FEET.

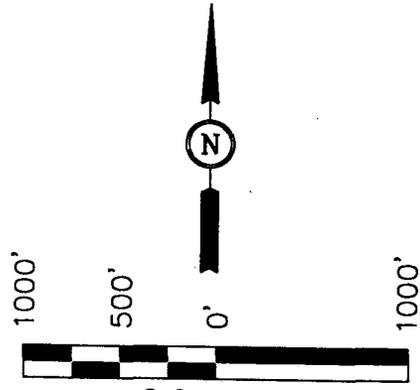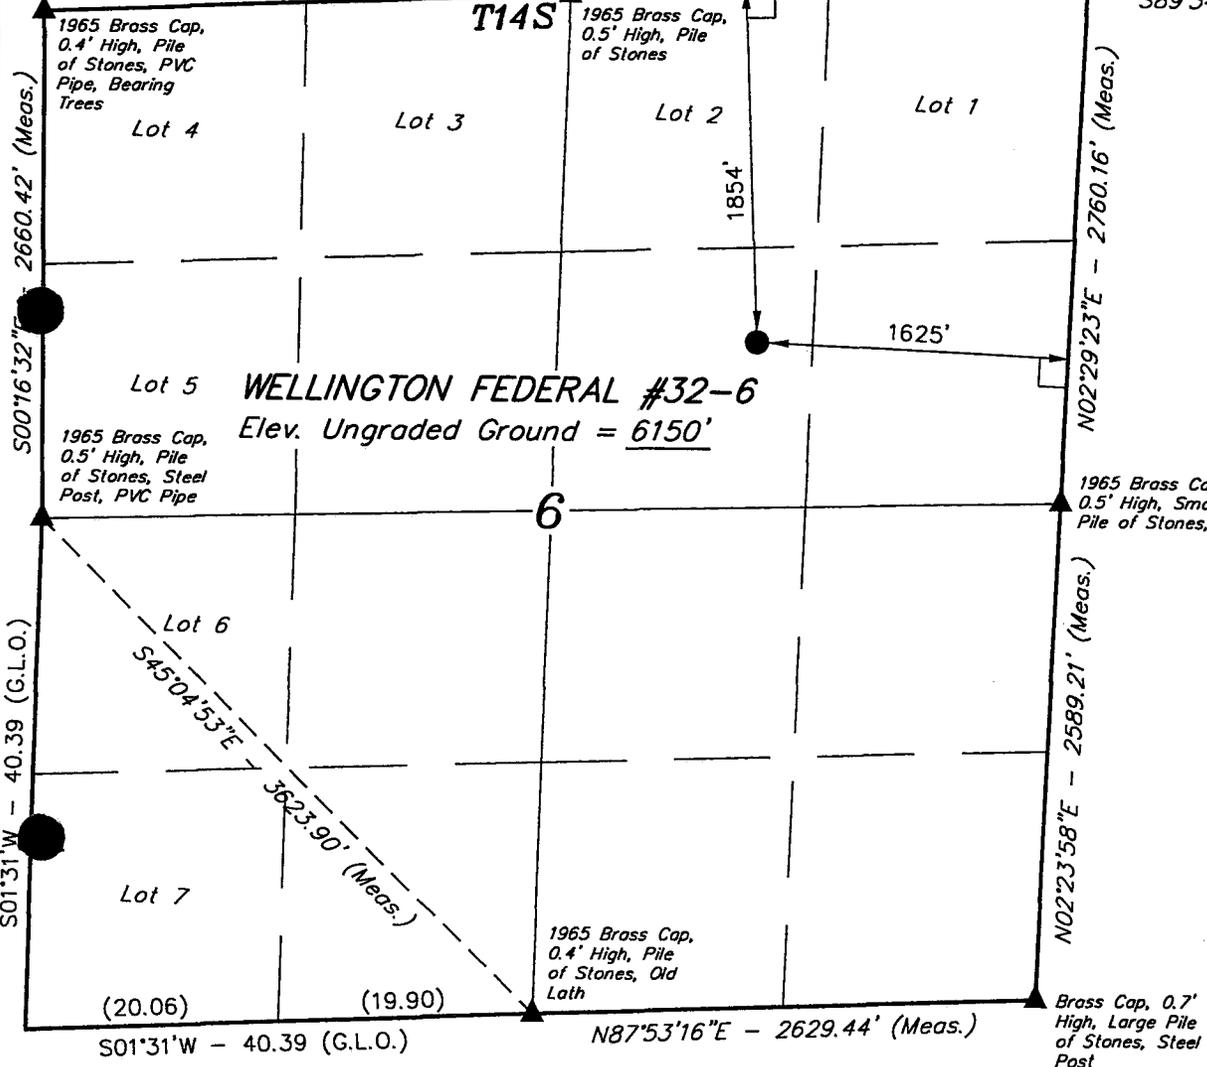

SCALE
CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Robert J. Key
REGISTERED LAND SURVEYOR
REGISTRATION NO. 161319
STATE OF UTAH

LEGEND:
 □ = 90° SYMBOL
 ● = PROPOSED WELL HEAD.
 ▲ = SECTION CORNERS LOCATED.
 △ = SECTION CORNERS RE-ESTABLISHED USING DOUBLE PROPORTION METHOD (NOT SET ON GROUND)

BASIS OF BEARINGS
 BASIS OF BEARINGS IS A G.P.S. OBSERVATION.
 (AUTONOMOUS NAD 83)
 LATITUDE = 39°38'24.12" (39.640033)
 LONGITUDE = 110°43'36.05" (110.726681)

UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 1-9-03	DATE DRAWN: 1-10-03
PARTY G.O. S.B. C.G.	REFERENCES G.L.O. PLAT	
WEATHER COOL	FILE WESTPORT RESOURCES CORP.	



WESTPORT OIL AND GAS COMPANY, L.P.

1670 Broadway Suite 2800 Denver Colorado 80202
Telephone: 303 573 5404 Fax: 303 573 5609

May 12, 2003

Utah Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
P. O. Box 145801
Salt Lake City, UT 84114-5801

Attn: Ms. Diana Mason

RE: Federal Leases – State of Utah APD
Wellington Federal 22-5 UTU-80560
Wellington Federal 23-5 UTU-80560
Wellington Federal 32-5 UTU-80560
Wellington Federal 33-5 UTU-80560
Wellington Federal 22-6 UTU-80561
~~Wellington Federal 32-6 UTU-80561~~
Wellington Federal 43-6 UTU-80561
Wellington Federal 32-7 UTU-73409
North Bench Federal 22-19 UTU-80553
North Bench Federal 24-19 UTU-80553
North Bench Federal 43-19 UTU-80553

Dear Ms. Mason:

Please find enclosed two (2) originals and one (1) copy of each of the eleven (11) referenced wells, State of Utah Application For Permit To Drill for your consideration and approval.

I want to thank you in advance for your cooperation and assistance in these matters. If you should have any questions, please contact the undersigned or Dan Carroll, senior engineer.

Very truly yours,
WESTPORT OIL AND GAS COMPANY, L. P.

Debby J. Black
Engineering Technician

DJB
Enclosures:
xc: Dan Carroll

RECEIVED
MAY 15 2003
OFFICE OF THE ATTORNEY GENERAL

WESTPORT OIL AND GAS COMPANY, L. P.

ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS

A table summarizing information for each of the eleven (11) wells. In general, the ground elevation ranges from 6020 feet above mean sea level (MSL) to 6734 feet MSL graded at stake. The top of the Ferron of the Mesa Verde Formation lies approximately 1830 feet to 4110 feet below ground surface (BGS) and is 280 feet thick resulting in total approximate depths of 2110 feet to 4390 feet BGS.

WELL NAME AND NUMBER	LOCATION	TD	GR
North Bench Federal 22-19	SENW Sec. 19: T 13 S – R 11 E, 1750' FNL, 1440' FWL	3420'	6700'
North Bench Federal 24-19	SESW Sec. 19: T 13 S – R 11 E, 920' FSL, 1980' FWL	4250'	6598'
North Bench Federal 43-19	NESE Sec. 19: T 13 S – R 11 E, 1380' FSL, 1291' FEL	4480'	6734'
Wellington Federal 22-5	SENW Sec. 5: T 14 S – R 11 E, 2040' FNL, 1739' FWL	2670'	6107'
Wellington Federal 23-5	NESW Sec. 5: T 14 S – R 11 E, 1632' FSL, 1649' FWL	2500'	6078'
Wellington Federal 32-5	SWNE Sec. 5: T 14 S – R 11 E, 1867' FNL, 2027' FEL	3300'	6237'
Wellington Federal 33-5	NWSE Sec. 5: T 14 S – R 11 E, 1860' FSL, 2000' FEL	2650'	6192'
Wellington Federal 22-6	SENW Sec. 6: T 14 S – R 11 E, 1886' FNL, 1452' FWL	2770'	6109'
Wellington Federal 32-6	SWNE Sec. 6: T 14 S – R 11 E, 1854' FNL, 1625' FEL	2770'	6150'
Wellington Federal 43-6	NESE Sec. 6: T 14 S – R 11 E, 1502' FSL, 1186' FEL	2550'	6096'
Wellington Federal 32-7	SWNE Sec. 7: T 14 S – R 11 E, 1385' FNL, 1490' FEL	2330'	6020'


WELL NAME AND NUMBER	FORMATION	TOP	BOTTOM
North Bench Federal 22-19	FERRON COAL	4110'	4390'
North Bench Federal 24-19	FERRON COAL	3750'	4030'
North Bench Federal 43-19	FERRON COAL	3980'	4260'
Wellington Federal 22-5	FERRON COAL	2170'	2450'
Wellington Federal 23-5	FERRON COAL	2000'	2280'
Wellington Federal 32-5	FERRON COAL	2800'	3080'
Wellington Federal 33-5	FERRON COAL	2150'	2430'
Wellington Federal 22-6	FERRON COAL	2270'	2550'
Wellington Federal 32-6	FERRON COAL	2270'	2550'
Wellington Federal 43-6	FERRON COAL	2050'	2330'
Wellington Federal 32-7	FERRON COAL	1830'	2110'

WESTPORT OIL AND GAS COMPANY, L.P.
FERRON COAL PROJECT
WELLINGTON FEDERAL 32-6
SWNE 1854' FNL, 1625' FEL
Section 6: Township 14 South – Range 11 E, S.L.B.&M.
CARBON COUNTY, UTAH

DRILLING PROGNOSIS:

1. Prepare location for drilling rig. Drill rat hole and mouse hole.
2. Drill a 12.25" hole 10% of the total depth of well. Run an electronic multi shot after reaching surface-hole total depth.
3. Run 9.625" surface casing and cement as specified in the casing and cementing sections of this Master Drilling Plan. Thread lock guide shoe, float collar and bottom two joints of casing. Run two joints of casing between the float shoe and the float collar.
4. Waiting on cement time shall be adequate to achieve a minimum of 500 psi compressive strength at the casing shoe prior to drilling out. Provide 24 hours prior notice to BLM office for BOP test.
5. Cut off casing, weld on head and nipple up BOP. Pressure test BOP and BOPE to 3000 psi and 250 psi for 15 minutes. Test BOP and BOPE with a test plug.
6. After BOP test, test the surface casing to 70% of burst. Test pressure = $0.70 \times 3950 \text{ psi} = 2765 \text{ psi}$.
7. Drill stage collar, float shoe and 10' of new formation. Run shoe test to 10.5 ppg EMW.
8. Drill a 7.875" hole to the top of the Ferron Coal with conventional rotary techniques and insert bits and air mud system.
9. Run single point directional survey with every bit trip.
10. Run open hole logs as specified in the logging section of Master Drilling Program.
11. Pending log evaluation, run sidewall cores or prepare to run 5.5" casing and cement in full tension as specified in the casing and cementing section of the Master Drilling Program.
12. Clean the location and release the drilling rig.



BOP EQUIPMENT AND CHOKE MANIFOLD DIAGRAM
3000psi WP

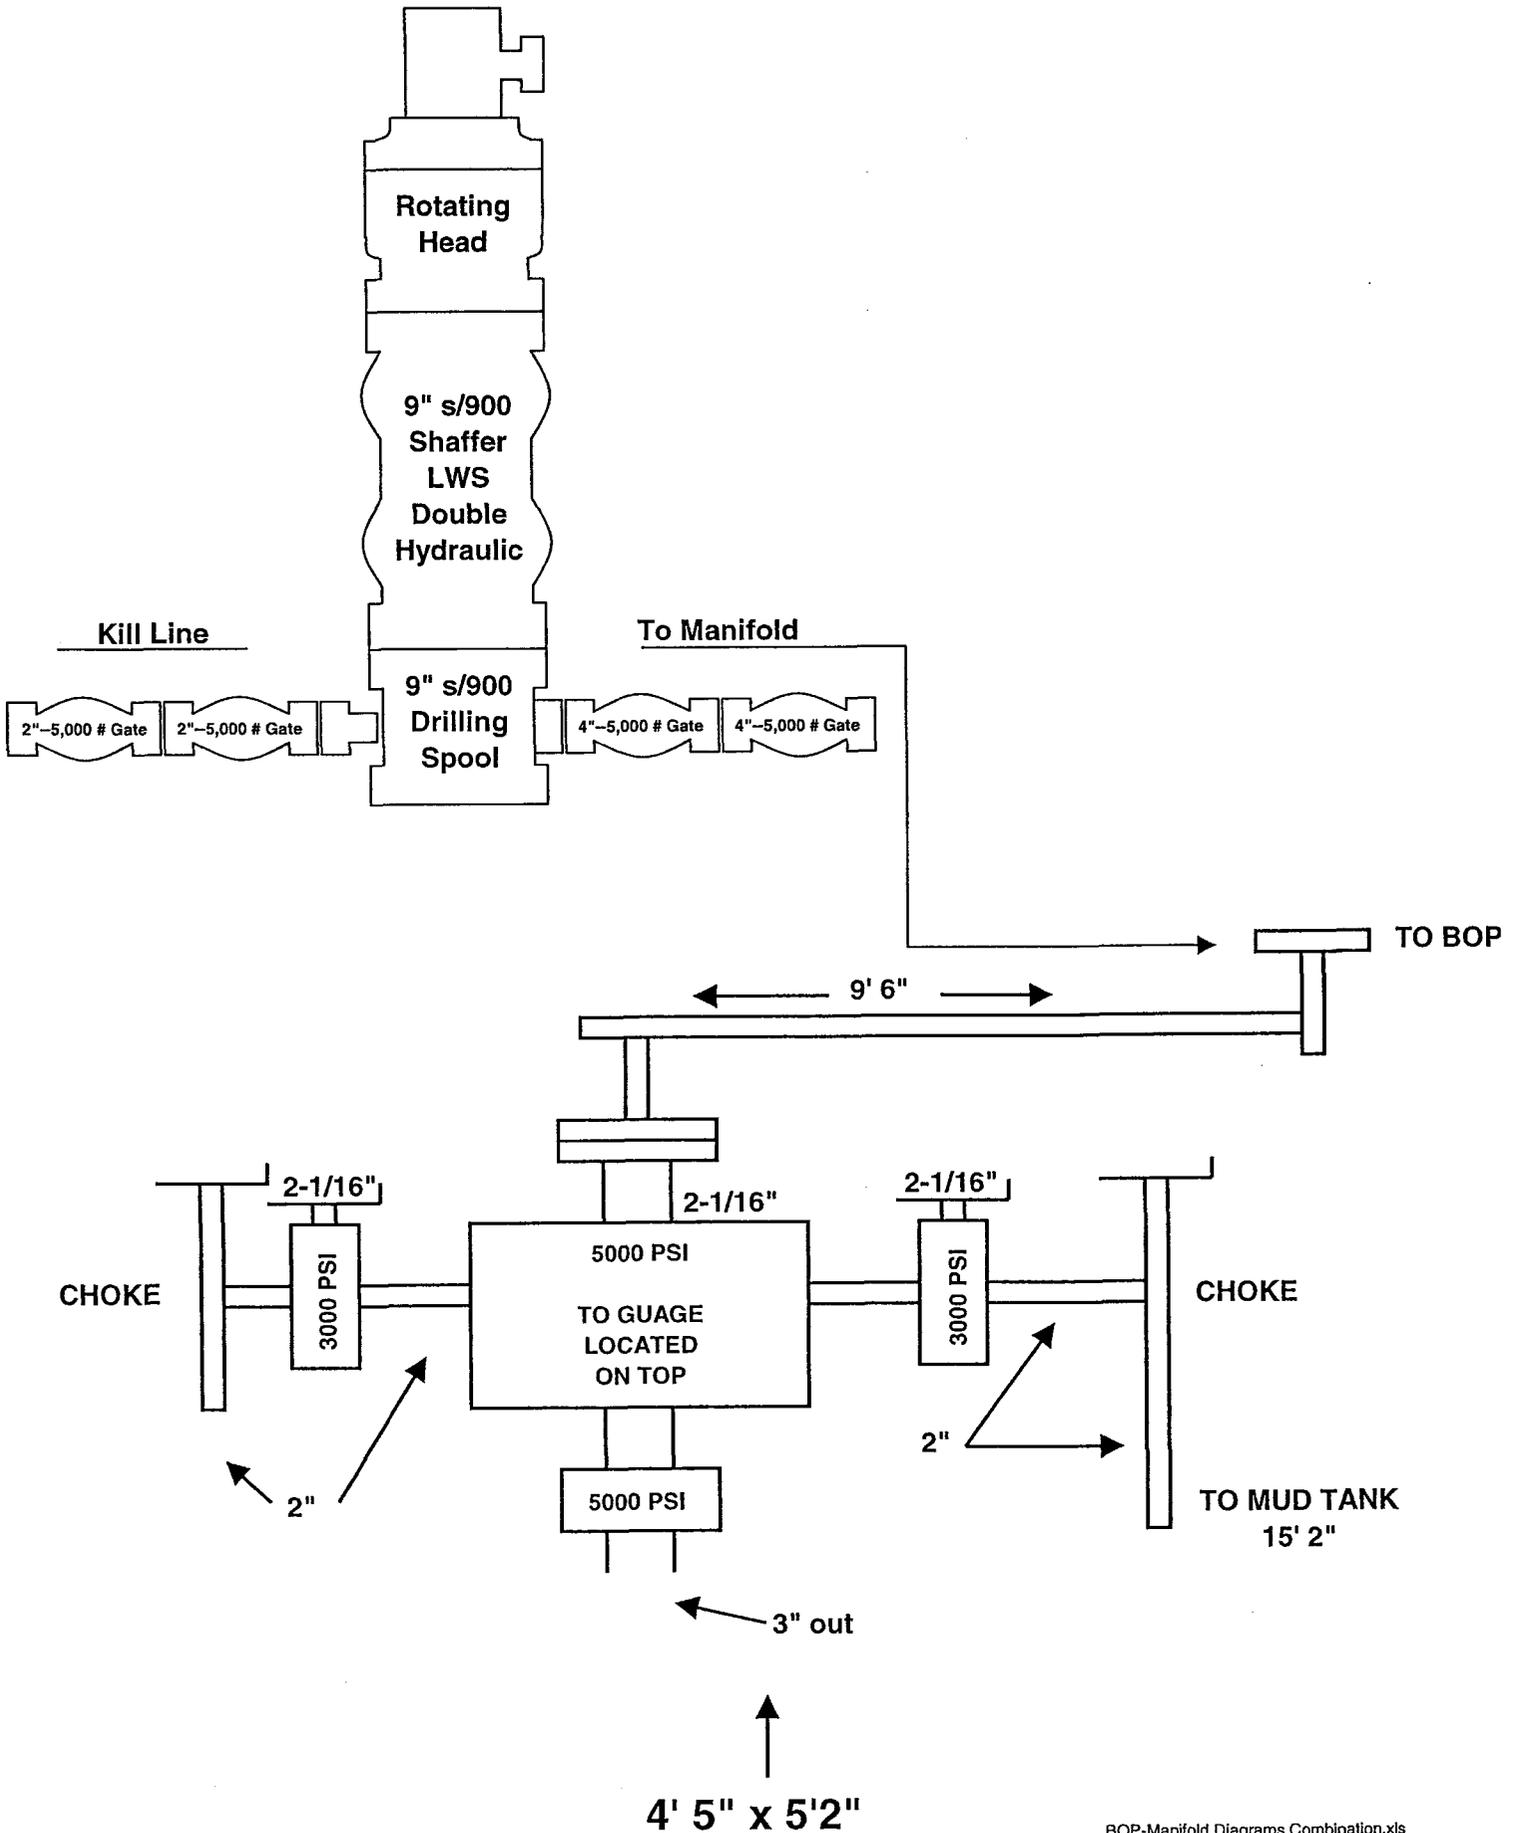

WESTPORT RESOURCES CORP.


LOCATION LAYOUT FOR

WELLINGTON FEDERAL #32-6
SECTION 6, T14S, R11E, S.L.B.&M.
1854' FNL 1625' FEL

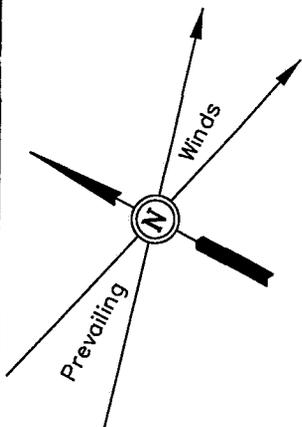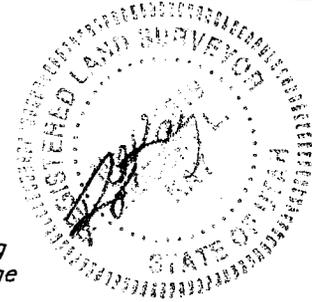

SCALE: 1" = 50'
DATE: 1-10-03
Drawn By: C.G.

CONSTRUCT DIVERSION DITCH

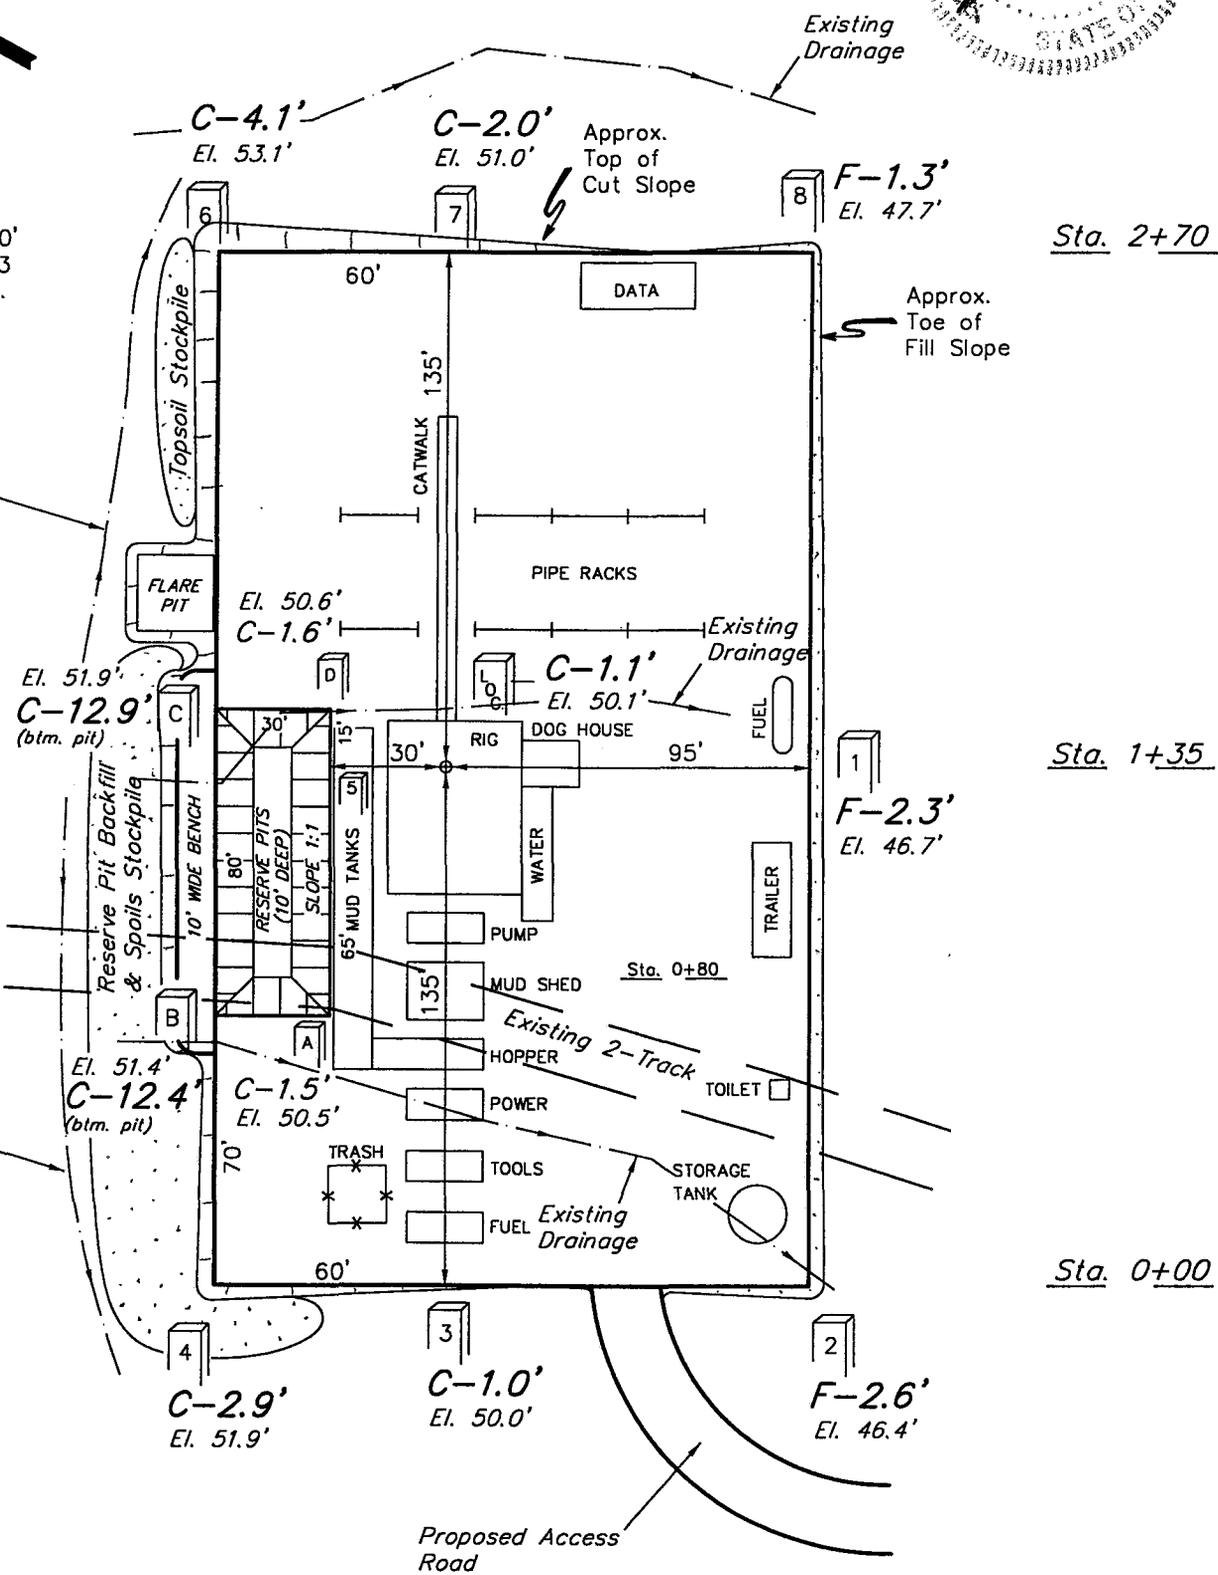

Sta. 2+70

Sta. 1+35

Sta. 0+00

NOTE:
Pit Capacity with
2' of Freeboard
= 1,770 Bbls.

NOTES:

Elev. Ungraded Ground At Loc. Stake = 6150.1'
FINISHED GRADE ELEV. AT LOC. STAKE = 6149.0'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

WESTPORT RESOURCES CORP.





TYPICAL CROSS SECTIONS FOR

**WELLINGTON FEDERAL #32-6
SECTION 6, T14S, R11E, S.L.B.&M.
1854' FNL 1625' FEL**



1" = 20'
X-Section
Scale
1" = 50'

DATE: 1-10-03
Drawn By: C.G.

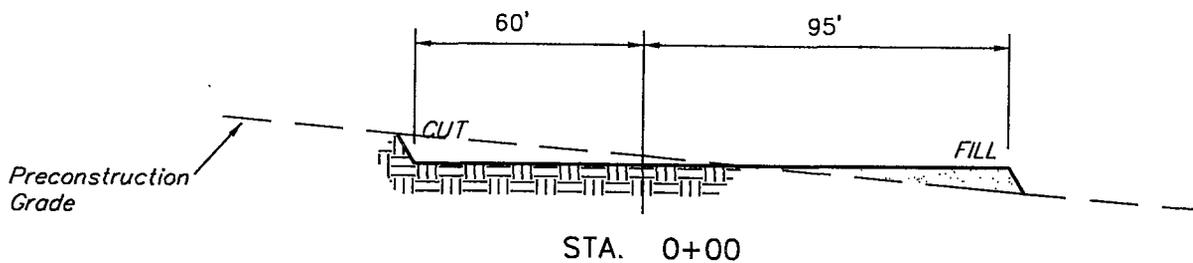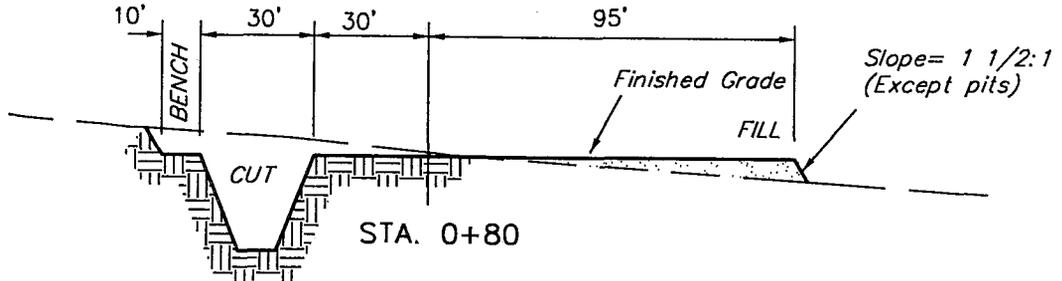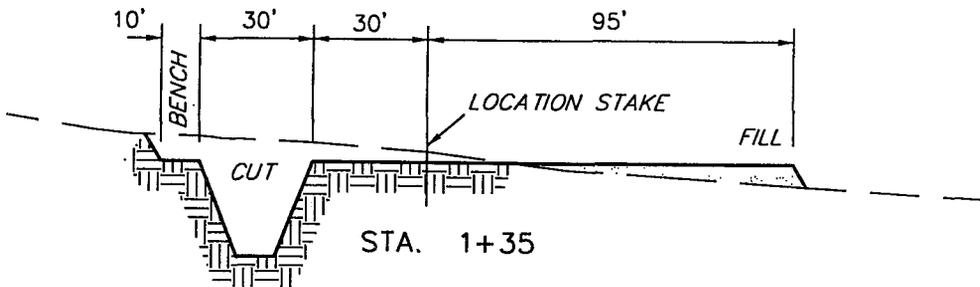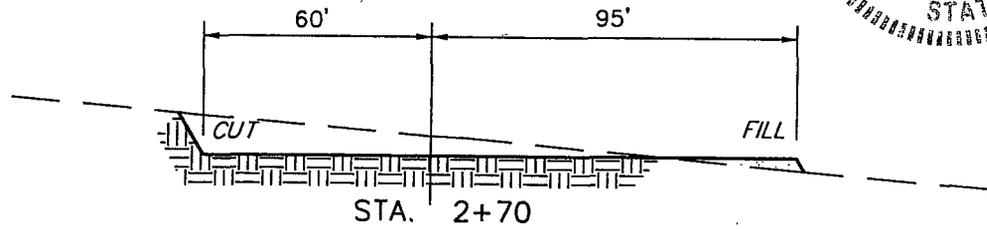

APPROXIMATE YARDAGES

CUT		
(6") Topsoil Stripping	=	800 Cu. Yds.
Remaining Location	=	1,590 Cu. Yds.
TOTAL CUT	=	2,390 CU.YDS.
FILL	=	1,250 CU.YDS.

EXCESS MATERIAL AFTER 5% COMPACTION	=	1,070 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	=	1,070 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	=	0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

003

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 05/15/2003

API NO. ASSIGNED: 43-007-30895

WELL NAME: WELLINGTON FED 32-6
OPERATOR: WESTPORT OIL & GAS CO (N2115)
CONTACT: DANIEL CARROLL

PHONE NUMBER: 303-573-5404

PROPOSED LOCATION:

SWNE 06 140S 110E
SURFACE: 1854 FNL 1625 FEL
BOTTOM: 1854 FNL 1625 FEL
CARBON
HELPER (18)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
LEASE NUMBER: UTU-80561
SURFACE OWNER: 1 - Federal

LATITUDE: 39.64035

PROPOSED FORMATION: FRSD

LONGITUDE: 110.72585

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. 158624364)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
Water Permit
(No. Municipal)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)

LOCATION AND SITING:


- ___ R649-2-3.
Unit _____
- ___ R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- ___ R649-3-3. Exception
- Drilling Unit
Board Cause No: 241-4 (140')
Eff Date: 9-26-2000
Siting: 460' fr outer boundary & 920' fr other wells
- ___ R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: 1-Federal Approval




OPERATOR: WESTPORT O&G CO (N2115)
 SEC. 6 T14S, R11E
 FIELD: HELPER (18)
 COUNTY: CARBON
 CAUSE: 241-4 / 9-26-2000

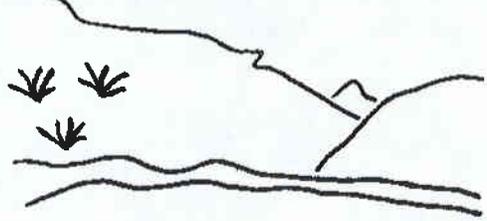

Utah Oil Gas and Mining

WELLS	UNIT STATUS	FIELD STATUS
♣	EXPLORATORY	ABANDONED
◊	GAS STORAGE	ACTIVE
*	NF PP OIL	COMBINED
⊙	NF SECONDARY	INACTIVE
◇	PENDING	PROPOSED
*	PI OIL	STORAGE
*	PP GAS	TERMINATED
*	PP GEOTHERML	COUNTY BOUNDARY
⊕	PP OIL	SECTION LINES
+	SECONDARY	TOWNSHIP LINES
×	TERMINATED	
○		
▲		
◆		
♠		

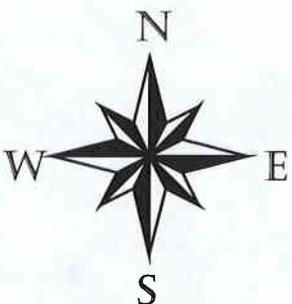

PREPARED BY: DIANA MASON
 DATE: 16-MAY-2003



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt
Governor

Kathleen Clarke
Executive Director

Lowell P. Braxton
Division Director

1594 West North Temple, Suite 1210

PO Box 145801

Salt Lake City, Utah 84114-5801

801-538-5340

801-359-3940 (Fax)

801-538-7223 (TDD)

July 8, 2003

Westport Oil & Gas Company
1670 Broadway, Suite 2800
Denver, CO 80202-4800

Re: Wellington Federal 32-6 Well, 1854' FNL, 1625' FEL, SW NE, Sec. 6, T. 14 South,
R. 11 East, Carbon County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-007-30895.

Sincerely,

A handwritten signature in black ink, appearing to read 'John R. Baza'.

John R. Baza
Associate Director

pab
Enclosures

cc: Carbon County Assessor
Bureau of Land Management, Moab District Office

Operator: Westport Oil & Gas Company
Well Name & Number Wellington Federal 32-6
API Number: 43-007-30895
Lease: UTU-80561

Location: SW NE Sec. 6 T. 14 South R. 11 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

005 APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work DRILL REENTER
1b. Type of Well Oil Well Gas Well Other Single Zone Multiple Zone

2. Name of Operator
Westport Oil and Gas Company, L. P.

3a. Address **1670 Broadway - Suite 2800 - Denver, CO 80202-4800**
3b. Phone No. (include area code) **303-573-5404**

4. Location of well (Report location clearly and in accordance with any State requirements.)*
At surface **SWNE 1854' FNL, 1625' FEL**
At proposed prod. zone **Same**

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*
approximately 6.9 miles ESE from Price, UT


15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drlg unit line, if any) **1625'**
16. No. of Acres in lease **490 acres**
17. Spacing Unit dedicated to this well **160 acres**


18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. **~1000'**
19. Proposed Depth **2770'**
20. BLM/ BIA Bond No. on file **BLM Bond # 01203**
BLM Nationwide Bond No. 158624364

21. Elevations (Show whether DF, RT, GR, etc.) **6150'**
22. Approximate date work will start* **Upon APD Approval**
23. Estimated Duration **5 days drilling plus 9 days completion**

24. Attachments
The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1 shall be attached to this form:

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by existing bond on file (see item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/ or plans as may be required by the authorized officer. |

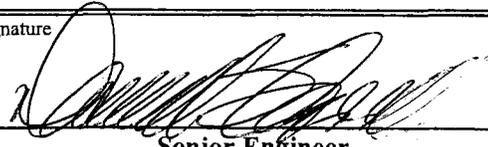25. Signature  Name (Printed/ Typed) **Daniel S. Carroll** Date **June 6, 2003**
Title **Senior Engineer**

Approved By (Signature)  Name (Printed/ Typed) **Assistant Field Manager, Division of Resources** Date **AUG 18 2003**
Title **Acting Assistant Field Manager, Division of Resources**

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

* (Instructions on reverse)

CONDITIONS OF APPROVAL ATTACHED

5. Lease Serial No. **UTU-80561**
6. If Indian, Allottee or Tribe Name
7. If Unit or CA Agreement, Name and No.
8. Lease Name and Well No. **Wellington Federal 32-6**
9. API Well No. **43-007-30895**
10. Field and Pool, or Exploratory **Helper Field - Ferron Coal**
11. Sec., T., R., M., or Blk. And Survey or Area **Section 6: T 14 S - R 11 E, S.L.B.&M.**
12. County or Parish **Carbon**
13. State **UT**

RECEIVED
AUG 22 2003

DIV. OF OIL, GAS & MINING

T14S, R11E, S.L.B.&M.

WESTPORT RESOURCES CORP.

Well location, WELLINGTON FEDERAL #32-6, located shown in the SW 1/4 NE 1/4 of Section 6, T14S, R11E, S.L.B.&M. Carbon County, Utah.

North 1/4 Cor. Sec. 5
1965 Brass Cap,
Flush with Ground,
Pile of Stones


BASIS OF ELEVATION

SPOT ELEVATION LOCATED ON A JEEP TRAIL IN THE NW 1/4 OF SECTION 32, T13S, R11E, S.L.B.&M. TAKEN FROM THE DEADMAN CANYON QUADRANGLE, UTAH, CARBON COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 6460 FEET.



SCALE
CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

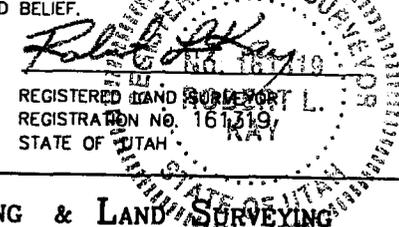

R
10
E

S00°16'32"E - 2660.42' (Meas.)

S01°31'W - 40.39 (G.L.O.)

S01°31'W - 40.39 (G.L.O.)

T13S
T14S

S87°40'01"W - 2730.74' (Meas.)

S87°39'04"W - 2708.69' (Meas.)

1965 Brass Cap,
0.4' High, Pile
of Stones, PVC
Pipe, Bearing
Trees

1965 Brass Cap,
0.5' High, Pile
of Stones

S00°52'31"E
2654.52' (Meas.)

West 1/4 Cor.
Sec. 32, 1965
Brass Cap, Pile
of Stone,
Bearing Tree

S89°34'02"E - 2616.07' (Meas.)

N02°29'23"E - 2760.16' (Meas.)

1965 Brass Cap
0.5' High, Small
Pile of Stones,

N02°23'58"E - 2589.21' (Meas.)

Brass Cap, 0.7'
High, Large Pile
of Stones, Steel
Post

Lot 4

Lot 3

Lot 2

Lot 1

Lot 5 WELLINGTON FEDERAL #32-6
Elev. Ungraded Ground = 6150'

1965 Brass Cap,
0.5' High, Pile
of Stones, Steel
Post, PVC Pipe

1965 Brass Cap,
0.4' High, Pile
of Stones, Old
Lath

Lot 6

Lot 7

(20.06)

(19.90)

N87°53'16"E - 2629.44' (Meas.)

1854'

1625'

S45°04'53"E - 3623.90' (Meas.)

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

(AUTONOMOUS NAD 83)

LATITUDE = 39°38'24.12" (39.640033)
LONGITUDE = 110°43'36.05" (110.726681)

LEGEND:

- └ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.
- △ = SECTION CORNERS RE-ESTABLISHED USING DOUBLE PROPORTION METHOD (NOT SET ON GROUND)

UINTAH ENGINEERING & LAND SURVEYING
85 SOUTH 200 EAST - VERNAL, UTAH 84078
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 1-9-03	DATE DRAWN: 1-10-03
PARTY G.O. S.B. C.G.	REFERENCES G.L.O. PLAT	
WEATHER COOL	FILE WESTPORT RESOURCES CORP.	

Westport Oil and Gas Company, L.P.
Wellington Federal 32-6
Lease U-80561
SW/NE Section 6, T14S, R11E
Carbon County, Utah

A COMPLETE COPY OF THIS PERMIT SHALL BE KEPT ON LOCATION from the beginning of site construction through well completion, and shall be available to contractors to ensure compliance.

CONDITIONS OF APPROVAL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be advised that Westport Oil and Gas Company, L.P. is considered to be the operator of the above well and is responsible under the terms and conditions of the lease for the operations conducted on the leased lands.

Bond coverage for this well is provided by CO1203 (Principal – Westport Oil and Gas Company, L.P.) via surety consent as provided for in 43 CFR 3104.2.

This office will hold the aforementioned operator and bond liable until the provisions of 43 CFR 3106.7-2 continuing responsibility are met.

This permit will be valid for a period of one year from the date of approval. After permit termination, a new application must be filed for approval.

All lease operations will be conducted in full compliance with applicable regulations (43 CFR 3100), Onshore Oil and Gas Orders, lease terms, notices to lessees, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors.

A. DRILLING PROGRAM

1. The proposed 3M BOPE is adequate for anticipated conditions. Testing of the BOPE to 2M standards is sufficient. Installation, testing and operation of the system shall be in conformance with Onshore Oil and Gas Order No. 2.
2. Concurrent approval from the State of Utah, Division of Oil, Gas & Mining (DOG M) is required before conducting any surface disturbing activities.
3. When drilling with air, the requirements of Onshore Oil and Gas Order No. 2, part III, E, Special Drilling Operations, shall apply. Among the requirements in this section are:
 - Spark arresters
 - Blooie line discharge 100 feet from wellbore
 - Straight blooie line
 - Deduster equipment
 - Float valve above bit
 - Automatic igniter on the blooie line
4. A cement bond log (CBL), or other appropriate tool for determining top-of-cement, shall be run on the production casing string and shall be submitted to BLM.

B. SURFACE USE

1. The following seed tables in the Standard Operating Practices shall be followed as conditions of approval:

Table A-1, Seed Mixture for Green Strip Areas

Table A-2, Seed Mixture for Final Reclamation, Pinyon-Juniper Areas

2. The following wildlife stipulations in the Standard Operating Practices shall be followed as conditions of approval:

EMP 16 & 17, Winter Seasonal Restriction on Crucial & High Priority Winter Range

EMP 19, Critical Winter Range Browse Hand Planting

3. The pit shall be lined.
4. Within six months of installation, surface structures shall be painted in the following flat, earth tone color: Olive Black (5WA20-6). This Fuller O'Brien color is for reference only. Any brand of paint may be used provided the colors match. Any facilities that must be painted to comply with OSHA standards are exempt.
5. The proposed action is within critical winter range and the surface disturbance associated with the project exceeds that which was analyzed and mitigated for the EIS. Since this surface disturbance has not been mitigated for in the EIS, the action is subject to the acre for acre mitigation for surface disturbance on critical winter range as provided for in the Price River Resource Management Framework Plan. The proponent shall complete a wildlife enhancement project designed to mitigate impacts on big game critical winter range at the rate of one acre of enhancement for each acre of disturbance. Acceptable projects may include vegetative manipulation designed to increase winter forage or other winter range habitat enhancements to improve big game distribution patterns. Projects shall be completed during the same calendar year as the surface disturbing activity taking place. All aspects of project design and implementation, NEPA compliance, project design and implementation shall be the responsibility of the proponent.
6. Operator shall coordinate with the PUC (Carbon County Airport) Airport manager prior to the drilling of the well.
7. BLM may require the company to install gates at some future time. This determination shall be made by BLM if negative resource impacts, due to easier

public access into the project area, are occurring. A key to the lock(s) shall be provided to BLM.

GENERAL CONSTRUCTION

1. Operator shall contact the Price BLM Office at least forty-eight hours prior to the anticipated start of construction and/or any surface disturbing activities. The BLM may require and schedule a preconstruction conference with the operator prior to the operator commencing construction and/or surface disturbing activities. The operator and the operator's contractor, or agents involved with construction and/or any surface disturbing activities associated with the project, shall attend this conference to review the Conditions of Approval and plan of development. The operator's inspector will be designated at the pre-drill conference, and is to be given an approved copy of all maps, permits and conditions of approval before the start of construction. The BLM will also designate a representative for the project at the preconstruction conference.
2. The operator shall designate a representative(s) who shall have the authority to act upon and to implement instructions from the BLM. The operator's representative shall be available for communication with the BLM within a reasonable time when construction or other surface disturbing activities are underway.
3. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the operator, or any person working on his behalf, on public land is to be immediately reported to the Price BLM Office. The operator will suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Price BLM Office. An evaluation of the discovery will be made by the BLM to determine appropriate actions to prevent the loss of significant cultural or scientific values. The operator is responsible for the cost of evaluation of any site found during construction. The BLM will determine what mitigation is necessary.
4. During project construction, surface disturbance and vehicle travel shall be limited to the approved location and access routes. Any additional area needed must be approved by the Price BLM Office prior to use.
5. The operator must provide a trash cage for the collection and containment of all trash. The trash shall be disposed in an authorized landfill. The location and access roads shall be kept litter free.
6. Vegetation removal necessitated by construction shall be confined to the limits of actual construction. Removed vegetation will be stockpiled for use in reclamation or removed from the construction site at the direction of the BLM.
7. Prior to surface disturbance, topsoil is to be separately removed and segregated

from other material. Topsoil depth will be decided onsite by BLM. If the topsoil is less than 6 inches, a 6-inch layer that includes the A horizon and the unconsolidated material immediately below the A horizon shall be removed and the mixture segregated and redistributed as the surface soil layer.

Generally topsoil shall be stored within the pad site or adjacent to access roads. The company in consultation with BLM shall determine stockpile locations and dimensions at the onsite. If the topsoil stockpiles will not be redistributed for a period in excess of one (1) year, the stockpiles are to be seeded with seed mixture as described on Table A-1 (attached).

ROAD and PIPELINE CONSTRUCTION

8. Operator shall provide an inspector under the direction of a registered professional engineer (PE) at all times during road construction. A PE shall certify (statement with PE stamp) that the road was constructed to the required Bureau of Land Management (BLM) road standards.
9. Road construction or routine maintenance activities are to be performed during periods when the soil can adequately support construction equipment. If such equipment creates ruts more than 6 inches deep, the soil is deemed too wet to adequately support construction equipment.
10. The operator is responsible for maintenance of all roads authorized through the lease or a right-of-way. Construction and maintenance shall comply with Class II or III Road Standards as described in BLM Manual Section 9113 and the Moab District Road Standards, except as modified by BLM. Maintenance may include but is not limited to grading, applying gravel, snow removal, ditch cleaning, headcut restoration/prevention.
11. Topsoil from access roads and pipelines is to be wind rowed along the uphill side of the road or stored in an approved manner. When the road and pipeline is rehabilitated, this soil will then be used as a top coating for the seed bed.
12. Erosion-control structures such as water bars, diversion channels, and terraces will be constructed to divert water and reduce soil erosion on the disturbed area. Road ditch turnouts shall be equipped with energy dissipators as needed to avoid erosion. Where roads interrupt overland sheet-flow and convert this runoff to channel flow, ditch turnouts shall be designed to reconvert channel flow to sheet flow. Rock energy dissipators and gravel dispersion fans may be used, or any other design which would accomplish the desired reconversion of flow regime. As necessary cut banks, road drainages, and road crossings shall be armored or otherwise engineered to prevent headcutting.
13. In the event construction can't be completed prior to winter closures, measures to

prevent erosion from upcoming spring snowmelt should be taken as follows:

Loose earth and debris must be removed from drainages, and flood plains. Earth and debris should not be stockpiled on drainage banks.

Road drainages should be checked to ensure there are none with uncontrolled outlets.

Be sure all ditch drainages have an outlet to prevent ponding. If necessary, build temporary sediment ponds to capture runoff from unreclaimed areas. Re-route ditches as needed to avoid channeling water through loosened soil.

PAD CONSTRUCTION

14. During the construction of the drill pad, suitable topsoil material is to be stripped and conserved in a stockpile on the pad. If stockpiles are to remain for more than a year, they shall be seeded with the seed mixture in Table A-1, attached.
15. Generally, drill pads are to be designed to prevent overland flow of water from entering or leaving the site. The pad is to be sloped to drain spills and water into the reserve pit. The drill pad shall be designed to disperse diverted overland flow and to regulate flow velocity so as to prevent or minimize erosion. Well pad diversion outlets shall be equipped with rock energy brakes and gravel-bedded dispersion fans.

REHABILITATION PROCEDURES

Site Preparation

16. The entire roadbed should be obliterated and brought back to the approximate original contour. Drainage control is to be reestablished as necessary. All areas affected by road construction are to be recontoured to blend in with the existing topography. All berms are to be removed unless determined to be beneficial by BLM. In recontouring the disturbed areas, care should be taken to not disturb additional vegetation.

Seedbed Preparation

17. An adequate seedbed should be prepared for all sites to be seeded. Areas to be revegetated should be chiseled or disked to a depth of at least 12 inches unless restrained by bedrock.
18. Ripping of fill materials should be completed by a bulldozer equipped with single or a twin set of ripper shanks. Ripping should be done on 4-foot centers to a depth of 12 inches. The process should be repeated until the compacted area is loose and

friable, then shall be followed by final grading. Seedbed preparation will be considered complete when the soil surface is completely roughened and the number of rocks (if present) on the site is sufficient to cause the site to match the surrounding terrain.

19. After final grading, the stockpiled topsoil shall be spread evenly across the disturbed area.

Fertilization

20. Commercial fertilizer with a formula of 16-16-8 is to be applied at a rate of 200 pounds per acre to the site. The rate may be adjusted depending on soil.
21. Fertilizer is to be applied not more than 48 hours before seeding, and shall be cultivated into the upper 3 inches of soil.
22. Fertilizer is to be broadcast over the soil using hand-operated "cyclone-type" seeders or rotary broadcast equipment attached to construction or revegetation machinery as appropriate to slope. All equipment should be equipped with a metering device. Fertilizer application is to take place before the final seeding preparation treatment. Fertilizer broadcasting operations should not be conducted when wind velocities would interfere with even distribution of the material.

Mulching

23. When it is time to reclaim this location, the Price BLM Office will determine whether it will be necessary to use mulch in the reclamation process. The type of mulch should meet the following requirements: Wood cellulose fiber shall be natural or cooked, shall disperse readily in water, and shall be nontoxic. Mulch shall be thermally produced and air dried. The homogeneous slurry or mixture shall be capable of application with power spray equipment. A colored dye that is noninjurious to plant growth may be used when specified. Wood cellulose fiber is to be packaged in new, labeled containers. A minimum application of 1500 pounds per acre shall be applied. A suitable tackifier shall be applied with the mulch at a rate of 60 to 80 pounds per acre.

An alternative method of mulching on small sites would be the application of straw or hay mulch at a rate of 2000 pounds per acre. Hay or straw shall be certified weed free. Following the application of straw or hay, crimping shall occur to ensure retention.

Reseeding

24. All disturbed areas are to be seeded with the seed mixture required by the BLM. The seed mixture(s) shall be planted in the fall of the year (Sept-Nov), in the

amounts specified in pounds of pure live seed (PLS)/acre. There shall be no noxious weed seed in the seed mixture. Seed will be tested and the viability testing of seed shall be done in accordance with State law(s) and within 12 months prior to planting. Commercial seed will be either certified or registered seed. The seed mixture container shall be tagged in accordance with State law(s) and available for inspection by the BLM. Seed is to be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture shall be evenly and uniformly planted over the disturbed area.

(Smaller/heavier seeds tend to drop to the bottom of the drill and are planted first. Appropriate measures should be taken to ensure this does not occur.) Where drilling is not possible, seed is to be broadcast and the area raked or chained to cover the seed. Woody species with seeds that are too large for the drill will be broadcast. When broadcasting the seed, the pounds per acre noted below are to be increased by 50 percent. Reseeding may be required if a satisfactory stand is not established to the surface rights owner's specifications. Evaluation of the seeding's success will not be made before completion of the second growing season after the vegetation becomes established. The Price BLM Office is to be notified a minimum of seven days before seeding a project.

25. The disturbed areas for the road and pipeline must be seeded in the fall of the year, immediately after the topsoil is replaced. The prescribed seed mixture is attached as Table A-2.

General

26. Prior to the use of insecticides, herbicides, fungicides, rodenticides and other similar substances, the operator must obtain from BLM, approval of a written plan. The plan must describe the type and quantity of material to be used, the pest to be controlled, the method of application, the location for storage and disposal of containers, and other information that BLM may require. A pesticide may be used only in accordance with its registered uses and within other agency limitations. Pesticides must not be permanently stored on public lands.

The following seed mixture would be planted along service road borrow ditches, around the edges of drill pads with a production well, and surrounding other production and maintenance facilities. The purpose for this is to provide a "green strip" buffer to minimize fire hazards and prevent invasion and establishment of noxious weeds in areas that will receive continued disturbance for the life of these areas.

Table A-1

Common Plant Name	Scientific Name	Pounds per acre (PLS)
Forage kochia	<i>Kochia prostrata</i>	2
Wyoming big sagebrush	<i>Artemisia tridentata wyomingensis</i> var. Gordon Creek	1
Douglas low rabbitbrush	<i>Chrysothamnus viscidiflorus</i>	1
TOTAL		4

The following seed mixture is for the area that would receive final reclamation. Areas would be planted to protect them from soil erosion and to restore forage production.

Table A-2

Common Plant Name	Scientific Name	Pounds per acre (PLS) ¹
Pinyon Juniper Areas		
<i>Grasses</i>		
Thickspike wheatgrass	<i>Elymus lanceolatus</i>	1.5
Intermediate wheatgrass	<i>Elytrigia intermedia</i>	1.5
Squirreltail	<i>Elymus elymoides</i>	2
Crested wheatgrass	<i>Agropyron desertorum</i>	2
<i>Forbs</i>		
Lewis flax	<i>Linum perenne lewisii</i>	1
Palmer penstemon	<i>Penstemon palmerii</i>	1
<i>Shrubs</i>		
Forage kochia	<i>Kochia prostrata</i>	2
Fourwing saltbrush	<i>Atriplex canescense</i>	2
Wyoming big sagebrush	<i>Artemesia tridentata wyomingensis</i> var. Gordon Creek	1
Antelope bitterbrush	<i>Purshia tridentata</i>	1
TOTAL		15

1. Seeding rate is listed as pounds per acre of pure live seed (PLS) drilled. Rate is increased by 50 percent if broadcast seeded.

Formula: pure live seed (PLS) = % seed purity x % seed germination

FERRON NATURAL GAS PROJECT AREA

PROPONENT: Westport **WELL #:** 32-6

EPM 16 & 17: WINTER SEASONAL RESTRICTION (DECEMBER 1 to APRIL 15) ON CRUCIAL AND HIGH PRIORITY WINTER RANGE.

Pg 1 of 1

Restrictions on Construction Phase Activity: Prohibit construction phase activity, described below, on big game high value and critical winter range during the period (December 1 - April 15) without regard for land ownership.

This condition would not apply to normal maintenance and operation of producing wells, described below. On nonfederal lands (where the federal government does not have either surface or subsurface ownership) the Companies would be allowed to conduct construction phase activity if needed to avoid breach of contract or loss of lease rights. In the event construction phase activity proceeds into the winter closure period on non federal interest lands, Companies would make available appropriate documentation to UDWR, upon request.

Construction Phase Activity: Construction phase activity is considered to include all work associated with initial drilling and construction of facilities through completion, including installation of pumping equipment, connection with ancillary facilities and tie-in with pipelines necessary for product delivery.

Companies would not be allowed to initiate construction activity unless it is reasonable to believe that such work can be finished to a logical stopping point prior to December 1 of that year. Specific activities considered to be covered by the seasonal closure include all heavy equipment operation including but not limited to the following:

- Mobilization/Demobilization or operation of heavy equipment (crawler tractor, front end loader, backhoe, road grader, etc.)
- Construction activity (road construction or upgrading, pad, pipeline, powerline, ancillary facilities, etc.),
- Drilling activity (Operator would not propose or initiate drilling activity if the project could not reasonably be expected to be finished to a logical stopping point by the December 1 date of that year.)
- Seismic operation, detonation of explosives

This seasonal closure would not apply to reconnaissance, survey/design and/or flagging of project work or other similar activity not requiring actions listed for heavy equipment operation.

Production Phase: A well is considered to be in production phase when the well and ancillary facilities are completed to the point that they are capable of producing and delivering product for sale. It is noted that heavy equipment operation may be necessary in the performance of maintenance and operation of producing wells.

Restriction on Non Emergency Workover Operations: The Companies will schedule non-emergency workover operations (defined below) on big game crucial and high value winter range outside the December 1 to April 15 date of the seasonal closure.

Non-emergency Workover Operations: Workover operations to correct or reverse a gradual loss of production over time (loss of production of 20 percent or less over a 60 day period) is considered to be routine or non-emergency workover operations and would not be permitted during the December 1 to April 15 time frame.

Emergency Workover Operations: Emergency work over operations are defined as downhole equipment failure problems or workover operation necessary to avoid shut in of the well or to avoid an immediate safety or environmental problem. Loss of production greater than 20 percent within a 60 day period is indicative of pump failure and will be treated as an emergency workover operation. The Companies will submit Sundry notices to BLM within five days of the emergency workover operations between December 1 and April 15.

FERRON NATURAL GAS PROJECT AREA

PROPONENT: Westport WELL #: 32-6

EPM 19: CRITICAL WINTER RANGE BROWSE HAND PLANTING

One or two browse species lists (checked below) are to be hand planted at the prescribed application rate and according to the following prescribed methods on critical winter range areas that are undergoing long term reclamation. This would include all pipeline corridors, berm around edge of drill pads, miscellaneous disturbed areas associated with construction such as staging areas for equipment, sidecast on road cuts, along side upgraded or new roads up to and including borrow ditch and in the termination of redundant access roads being closed. This planting shall be completed in the first planting window following reclamation.

Planting Methods:

Planting shall be accomplished using a labor force with specific experience in landscape restoration, hand planting methods and handling and care of browse tubling and or bareroot stock plants.

Browse plants to be utilized can be bareroot stock or tubling stock plants of 1 year old age class or greater.

Browse seedling protectors will be used to provided protection from browsing ungulates for two years. Seedling protectors will be of an open mesh rigid design that will break down when exposed to sunlight and that measures a minimum of 12 inches in length and 4 inches in diameter. The protectors will be secured around the browse seedlings.

Planting shall be completed in the spring (March 1- April 1) and or fall (November 1- December 1) planting windows.

Browse plants shall be stored and handled in such a manner as to maintain viability, according to the type of browse stock being used.

Planting Species and Application Rate:

<u>Species</u>	<input type="checkbox"/> Sagebrush-Grass <u>Plants Per Acre</u>	<input type="checkbox"/> Pinyon-Juniper
Wyoming Sagebrush (Gordon Creek)	100	50
Fourwing Saltbush (Utah seed source collected at or above 5,000 feet elevation)	100	50
True Mountain Mahogany (Utah seed source)	0	50
Antelope Bitterbrush (Utah seed source)	0	50
Total	200	200

Suitable Substitutions:

Prostrate Kochia	yes	yes
Whitestem Rubber Rabbitbrush	no	yes
Utah Serviceberry	no	yes
Winterfat	yes	no

C. REQUIRED APPROVALS, REPORTS AND NOTIFICATIONS

Required verbal notifications are summarized in Table 1, attached.

Building Location- Contact the BLM, Natural Resource Protection Specialist at least 48-hours prior to commencing construction of location.

Spud- The spud date will be reported to BLM 24-hours prior to spudding. Written notification in the form of a Sundry Notice (Form 3160-5) will be submitted to the Moab Field Office within 24-hours after spudding, regardless of whether spud was made with a dry hole digger or big rig.

Daily Drilling Reports- Daily drilling reports shall detail the progress and status of the well and shall be submitted to the Moab Field Office on a weekly basis.

Monthly Reports of Operations- In accordance with Onshore Oil and Gas Order No. 1, this well shall be reported on Minerals Management Service (MMS) Form 3160, "Monthly Report of Operations," starting the month in which operations commence and continuing each month until the well is physically plugged and abandoned. This report will be filed directly with MMS.

Sundry Notices- There will be no deviation from the proposed drilling and/or workover program without prior approval. "Sundry Notices and Reports on Wells" (Form 3160-5) will be filed with the Moab Field Office for approval of all changes of plans and subsequent operations in accordance with 43 CFR 3162.3-2. Safe drilling and operating practices must be observed.

Drilling Suspensions- Operations authorized by this permit shall not be suspended for more than 30 days without prior approval of the Moab Field Office. All conditions of this approval shall be applicable during any operations conducted with a replacement rig.

Undesirable Events- Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be immediately reported to the BLM in accordance with requirements of NTL-3A.

Cultural Resources- If cultural resources are discovered during construction, work that might disturb the resources is to stop, and the Price Field Office is to be notified.

First Production- Should the well be successfully completed for production, the Moab Field Office will be notified when the well is placed in producing status. Such notification may be made by phone, but must be followed by a sundry notice or letter not later than five business days following the date on which the well is placed into production.

A first production conference will be scheduled as soon as the productivity of the well is apparent. This conference should be coordinated through the Moab Field Office. The Moab Field Office shall be notified prior to the first sale.

Well Completion Report- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted to the Moab Field Office not later than thirty-days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs, core descriptions, core analyses, well test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. When requested, samples (cuttings and/or samples) will be submitted to the Moab Field Office.

Venting/Flaring of Gas- Gas produced from this well may not be vented/flared beyond an initial, authorized test period of 30 days or 50 MMcf, whichever first occurs, without the prior, written approval of the Moab Field Office. Should gas be vented or flared without approval beyond the authorized test period, the well may be ordered shut-in until the gas can be captured or approval to continue the venting/flaring as uneconomic is granted. In such case, compensation to the lessor (BLM) shall be required for that portion of the gas that is vented/flared without approval and which is determined to have been avoidably lost.

Produced Water- An application for approval of a permanent disposal method and location will be submitted to the Moab Field Office for approval pursuant to Onshore Oil and Gas Order No.7.

Off-Lease Measurement, Storage, Commingling- Prior approval must be obtained from the Moab Field Office for off-lease measurement, off-lease storage and/or commingling (either down-hole or at the surface).

Plugging and Abandonment- If the well is completed as a dry hole, plugging instructions must be obtained from the Moab Field Office prior to initiating plugging operations.

A "Subsequent Report of Abandonment" (Form 3160-5) will be filed with the Moab Field Office within thirty-days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Upon completion of approved plugging, a regulation marker will be erected in accordance with 43 CFR 3162.6. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the Price Field Office or the appropriate surface managing agency.

TABLE 1

NOTIFICATIONS

Notify Don Stephens (435-636-3608) of the BLM Price Field Office for the following:

2 days prior to commencement of dirt work, construction and reclamation;

1 day prior to spudding;

50 feet prior to reaching the surface casing setting depth.

If the person at the above number cannot be reached, notify the Moab Field Office at 435-259-2100. If unsuccessful, contact the person listed below.

Well abandonment operations require 24 hour advance notice and prior approval. In the case of newly drilled dry holes, verbal approval can be obtained by calling the Moab Field Office at 435-259-2100. If approval is needed after work hours, you may contact the following:

Eric Jones, Petroleum Engineer Office: 435-259-2117
Home: 435-259-2214

Form 3160-5
(August 1999)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0133
Expires November 30, 2000

006

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
SEE ATTACHED LIST

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
SEE ATTACHED LIST

9. API Well No.
43-007-30895

10. Field and Pool, or Exploratory Area
Helper Field - Ferron Coal

11. County or Parish, State
Carbon County, Utah

SUBMIT IN TRIPPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL AND GAS COMPANY, L. P.

3a. Address
1670 Broadway, Suite 2800, Denver, CO 80202-4800

3b. Phone No. (include area code)
303-573-5404

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEE ATTACHED LIST
6 14S 71E

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Deepen
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Fracture Treat
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Plug and Abandon
	<input type="checkbox"/> Plug Back
	<input type="checkbox"/> Production (Start/Resume)
	<input type="checkbox"/> Reclamation
	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Water Disposal
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Well Integrity
	<input checked="" type="checkbox"/> Other <u>Change surface casing and hole size</u>

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

For the wells on the attached list change of the surface casing size and hole size as follows: from a 12-1/4" hole for 9-5/8" 40 lb/ft, J-55, ST&C to 11" hole for 8-5/8", 24 lb/ft, J-55, ST&C

Accepted by the
Utah Division of
Oil, Gas and Mining

Date: 8/28/03
By: [Signature]

Federal Approval Of This
Action Is Necessary

COPY SENT TO OPERATOR
Date: 8-29-03
Initials: CHD

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) **W. W. McKnab II** Title **Project Manager**

Signature [Signature] Date **August 27, 2003**

THIS SPACE FOR FEDERAL OR STATE USE

Approved by _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED
AUG 28 2003
DIV. OF OIL, GAS & MINING

Attachment to Sundry Notice dated August 27, 2003
 Request for change of surface casing size from 9-5/8" to 8-5/8"

WESTPORT OIL AND GAS COMPANY, L. P.

1670 Broadway
 Suite 2800
 Denver, CO 80202-4800

API Number	Lease Serial No	Well Name	Spot	Description				S	T	R	Estimated TD
				FNL	FSL	FEL	FWL				
43-007-30916	UTU-80560	Wellington Federal #22-5	SE NW	2,040'			1,739'	5	14S	11E	2,670'
43-007-30848	UTU-80560	Wellington Federal #23-5	NE SW		1,632'		1,649'	5	14S	11E	2,500'
43-007-30846	UTU-80560	Wellington Federal #32-5	SW NE	1,867'		2,027'		5	14S	11E	3,300'
43-007-30830	UTU-80560	Wellington Federal #33-5	NW SE		1,860'	2,000'		5	14S	11E	2,650'
43-007-30917	UTU-80561	Wellington Federal #22-6	SE NW	1,886'			1,452'	6	14S	11E	2,770'
43-007-30895	UTU-80561	Wellington Federal #32-6	SW NE	1,854'		1,625'		6	14S	11E	2,770'
43-007-30918	UTU-80561	Wellington Federal #43-6	NE SE		1,502'	1,186'		6	14S	11E	2,550'
43-007-30919	UTU-73409	Wellington Federal #32-7	SW NE	1,385'		1,490'		7	14S	11E	2,330'
43-007-30847	UTU-80553	North Bench Federal #22-19	SE NW	1,750'			1,440'	19	13S	11E	4,600'
43-007-30839	UTU-80553	North Bench Federal #24-19	SE SW		920'		1,980'	19	13S	11E	4,250'
43-007-30834	UTU-80553	North Bench Federal #43-19	NE SE		1,380'	1,291'		19	13S	11E	4,480'

FAX TRANSMITTAL SHEET

DATE: August 28, 2003

TO: Dustin Doucet
Utah Division of Oil, Gas and Mining
1594 West North Temple
Suite 1210
Box 145801
Salt Lake City, UtahTELEPHONE No: 801-538-5281
FAX NO: 801-359-3940FROM: BILL MCKNAB
Holiday Inn
Price, UtahTELEPHONE NO: 435-637-8880
FAX NO: 435-637-3680
Email: BillMcKnab@aol.com
CELL: 303-550-1274NO OF PAGES SENT: 8 (including cover sheet)

As we discussed yesterday enclosed are the Sundry Notices requesting approval of the change in casing size.

The meridian is SLB&M but the field width was only one character wide and wouldn't allow me to enter it.

The signed originals are in the mail. Original approved copies should be sent to the Denver address.


If possible would you please fax approved copies back to the number on the heading.

It is planned to spud the North Bench State 23-32 on Saturday, August 30, 2003.

I have also included a copy of the BLM Sundry Notice requesting the same change.

Please call me if there are any questions or problems.

Thank you for your help.

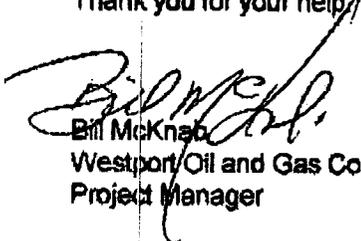
Bill McKnab
Westport Oil and Gas Company, L. P.
Project Manager

RECEIVED

AUG 28 2003

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

007

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
SEE ATTACHED LIST

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
SEE ATTACHED LIST

9. API Well No.
43-007-30895

10. Field and Pool, or Exploratory Area
Helper Field - Ferron Coal

11. County or Parish, State
Carbon County, Utah

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL AND GAS COMPANY, L. P.

3a. Address
1670 Broadway, Suite 2800, Denver, CO 80202-4800

3b. Phone No. (include area code)
303-573-5404

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEE ATTACHED LIST
6 14S 11E

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Change surface casing and hole size
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomplate in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

For the wells on the attached list change of the surface casing size and hole size as follows: from a 12-1/4" hole for 9-5/8", 40 lb/ft, J-55, ST&C to 11" hole for 8-5/8", 24 lb/ft, J-55, ST&C

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) **V. W. McKnab II** Title **Project Manager**

Signature *[Signature]* Date **August 27, 2003**

THIS SPACE FOR FEDERAL OR STATE USE

Approved by _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office _____

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States a false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED
SEP 02 2003
DIV OF OIL & GAS

Attachment to Sundry Notice dated August 27, 2003
 Request for change of surface casing size from 9-5/8" to 8-5/8"

WESTPORT OIL AND GAS COMPANY, L. P.
 1670 Broadway
 Suite 2800
 Denver, CO 80202-4800

API Number	Lease Serial No	Well Name	Spot	Description					S	T	R	Estimated TD
				FNL	FSL	FEL	FWL					
43-007-30916	UTU-80560	Wellington Federal #22-5	SE NW	2,040'				1,739'	5	14S	11E	2,670'
43-007-30848	UTU-80560	Wellington Federal #23-5	NE SW		1,632'			1,649'	5	14S	11E	2,500'
43-007-30846	UTU-80560	Wellington Federal #32-5	SW NE	1,867'		2,027'			5	14S	11E	3,300'
43-007-30830	UTU-80560	Wellington Federal #33-5	NW SE		1,860'	2,000'			5	14S	11E	2,650'
43-007-30917	UTU-80561	Wellington Federal #22-6	SE NW	1,886'				1,452'	6	14S	11E	2,770'
43-007-30895	UTU-80561	Wellington Federal #32-6	SW NE	1,854'		1,625'			6	14S	11E	2,770'
43-007-30918	UTU-80561	Wellington Federal #43-6	NE SE		1,502'	1,186'			6	14S	11E	2,550'
43-007-30919	UTU-73409	Wellington Federal #32-7	SW NE	1,385'		1,490'			7	14S	11E	2,330'
43-007-30847	UTU-80553	North Bench Federal #22-19	SE NW	1,750'				1,440'	19	13S	11E	4,600'
43-007-30839	UTU-80553	North Bench Federal #24-19	SE SW			920'		1,980'	19	13S	11E	4,250'
43-007-30834	UTU-80553	North Bench Federal #43-19	NE SE		1,380'	1,291'			19	13S	11E	4,480'

RECEIVED
 SEP 02 2003
 DIV. OF OIL, GAS & MINING

009

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: Westport Oil and Gas Company, L. P. Operator Account Number: N 2115
 Address: 1670 Broadway, Suite 2800
city Denver
state CO zip 80202-4800 Phone Number: (303) 573-5404

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
4300730895	Wellington Federal 32-06		SWNE	6	14S	11E	Carbon
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
A	99999	13890	9/16/2003			9/18/03	
Comments: <u>FRSD</u>							

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Bruce Ladd

Name (Please Print)

Bruce Ladd

Signature

Senior Drilling Engineer

9/17/2003

Title

Date

(6/2000)

RECEIVED
SEP 17 2003
DIV. OF OIL, GAS & MINING

J

DIVISION OF OIL, GAS AND MINING**SPUDDING INFORMATION**Name of Company: WESTPORT OIL & GAS COMPANY LPWell Name: WELLINGTON FED 32-6Api No: 43-007-30895 Lease Type: FEDERALSection 06 Township 14S Range 11E County CARBONDrilling Contractor PENSE BROTHERS RIG # 9**SPUDDED:**Date 09/16/03Time 4:00 PMHow DRY**Drilling will commence:** _____Reported by BOZE STINSONTelephone # 1-435-820-0785Date 09/17/2003 Signed CHD

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

010

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL AND GAS COMPANY, L. P.

3a. Address **1670 Broadway-Suite 2800 Denver, CO 80202-4800**
 3b. Phone No. (include area code) **(303) 573-5404**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SWNE 1854' FNL, 1625' FEL

5. Lease Serial No.
UTU-80561

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
Wellington Federal 32-06

9. API Well No.
43-007-30895

10. Field and Pool, or Exploratory
Helper Field / Ferron Coal

11. County or Parish, State
Sec. 6: T 14 S - R 11 E, S.L.B.&M.

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<u>Spud & Drilling</u>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	<u>Activities Reports</u>

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be files within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Westport Oil and Gas Company, L. P. respectfully wishes to inform the proper authorities of drilling activities for the above subjected well which spud on September 16, 2003 and ran 8 5/8", 24#, J-55, ST&C, R-3 surface casing set @ 332' KB. Drilled ahead to a depth of 2760' TD. Ran Dual Induction Guard Log & Compensated Density and Compensated Neutron w/GR logs. Pense Bros. drilling rig #9 released on September 19, 2003 @ 2:00 a.m. RU Excell drilling rig #15 to run and cement 5 1/2", 17ppf, N-80 & M-80, LT&C, R-3 production casing to a depth of 2759' KB. Currently, waiting on completion and pipeline connection.

RECEIVED

OCT 14 2003

Attached copies of drilling activities reports.

DIV. OF OIL, GAS & MINING

BLM Bond No. CO-1203 BLM Nationwide Bond 158626364

14. I hereby certify that the foregoing is true and correct
 Name (Printed/Typed) **Debby Black** Title **Engineering Technician**
 Signature *Debby Black* Date **10/9/03**

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by _____ Title _____ Date _____
 Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
 Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



**Drilling Chronological
Regulatory**

Well Name: WELLINGTON FEDERAL 32-06					
Field Name:	HELPER	S/T/R:	6/14S/11E	County, State:	CARBON, UT
Operator:	RT OIL AND GAS COMPA	Location Desc:	Proceed in an easterly, then	District:	U-UTAH CARBON COUN
Project AFE:	103011D	AFEs Associated:	/ / /		

Daily Summary					
Activity Date :	9/17/2003	Days From Spud :	0	Current Depth :	335 Ft
24 Hr. Footage Made :		335 Ft			
Rig Company :			Rig Name:		
Formation :			Weather:		

Operations						
Start	Hrs	Code	Remarks	Start Depth	End Depth	Run
7:00	9.00	01	MIRU PENSE RIG # 9.	0	0	NIH
16:00	4.00	02	MUD UP & DRILL 14 3/4" HOLE TO 50'.	0	50	NIH
20:00	0.50	21	WELD & SET 50' 12 3/4" CONDUCTOR	50	50	NIH
20:30	2.00	02	DRLG 11" HOLE TO 335'	50	335	NIH
22:30	0.50	06	POOH TO RUN SURF CSG	335	335	NIH
23:00	1.00	12	RUN 10 JTS 8 5/8" 24# 8rd ST&C J-55 CSG. TALLY 324.15' SET @ 332' KB. CSG EQUIPPED W/ GS, 3 CENT, & 1 CMT BASKET	335	335	NIH
0:00	2.50	21	WAIT ON HALLIBURTON	335	335	NIH
2:30	2.00	12	RU HALLIBURTON . PUMP 10 BBLS WTR, 10 BBLS GELLED WTR, 20 BBLS WTR, BREAK CIRC, MIX & PUM[P 150 SKS PREM W/ 2% CC, .25#/SK RFLOCELE @ 15.6 #/GAL, YIELDING 1.18 CFS. DISPLACED W/ 18.6 BBLS WTR. CIRC 5 BBLS CMT TO SURF.	335	335	NIH
4:30	2.50	13	WOC.	335	335	NIH
Total:	24.00					

Daily Summary					
Activity Date :	9/18/2003	Days From Spud :	0	Current Depth :	2510 Ft
24 Hr. Footage Made :		2175 Ft			
Rig Company :			Rig Name:		
Formation :			Weather:		

Operations						
Start	Hrs	Code	Remarks	Start Depth	End Depth	Run
7:00	3.50	13	WOC	335	335	NIH
10:30	4.50	14	ND CMT HEAD, DIG OUT CELLER, WELD ON CSG HEAD, NU BOP	335	335	NIH
15:00	3.00	15	TEST BOP. REPAIR LEAKS	335	335	NIH
18:00	1.00	06	TIH DRL'D CEMENT SHOE	335	335	NIH
19:00	12.00	02	DRILLING TO 2510' STARTED INJECTING WTR @ 2420'	335	2510	NIH
Total:	24.00					

Well Name: WELLINGTON FEDERAL 32-06

Field Name:	HELPER	S/T/R:	6/14S/11E	County, State:	CARBON, UT
Operator:	RT OIL AND GAS COMPA	Location Desc:	Proceed in an easterly, then	District:	U-UTAH CARBON COUN

Daily Summary

Activity Date :	9/19/2003	Days From Spud :	0	Current Depth :	2760 Ft	24 Hr. Footage Made :	250 Ft
Rig Company :		Rig Name :		Formation :		Weather :	

Operations

Start	Hrs	Code	Remarks	Start Depth	End Depth	Run
7:00	2.50	02	drlg to td 2760'	2510	2760	NIH
9:30	0.50	05	CLEAN HOLE	2760	2760	NIH
10:00	4.00	06	TOOH, PU TRICONE BIT & DC'S, TIH	2760	2760	NIH
14:00	2.00	05	MIX SLICK WTR	2760	2760	NIH
16:00	0.50	03	TRIP TO TD, CLEAN OUT 10' FILL	2760	2760	NIH
16:30	1.00	05	CIRC & CONDITION HOLE	2760	2760	NIH
17:30	1.00	06	SHORT TRIP & REAM TITE SPOTS	2760	2760	NIH
18:30	1.00	05	CIRC & CONITION HOLE	2760	2760	NIH
19:30	0.50	10	PULL 60' & RUN DEVIATION SURVEY 6.75 DEG	2760	2760	NIH
20:00	2.50	06	POOH F/ LOGS	2760	2760	NIH
22:30	3.50	11	RUN DIL GUARD LOG / GR, & CNDL W/GR. LOGGERS TD 2768'. LOGGED BY PSI. RELEASED RIG @ 0200 HRS 9-19-03.	2760	2760	NIH
2:00	5.00	21	WAIT ON DAYLITE TO MOVE	2760	2760	NIH
Total:	24.00					

Formation

Formation Name	Current Well Top	Subsea Datum	Ref Well Top	Elec Top	Comments

Casing

DateIn	Setting Depth	Jts Run	Type	Size	Weight	Grade	MINID	HoleDiam	TD
9/16/2003	58	0	1. Conductor	12.75	29.31	A-252	0	14.75	50
9/16/2003	332.15	10	3. Surface	8.625	24	J-55	0	11	335

Stage: 1, Wash, 10, 0, Fresh Water, , 0, 0									
Stage: 1, Wash, 10, 0, Gel Sweep, , 0, 0									
Stage: 1, Wash, 20, 0, Fresh Water, , 0, 0									
Stage: 1, Tail, 0, 150, 2% CaCl2, 0.25 lb/sk Flocele, Class A, 1.18, 15.6									
Stage: 1, Displacement, 18.6, 0, Fresh Water, , 0, 0									
9/20/2003	2759.2	69	5. Production	5.5	17	N-80	0	7.875	2760
Stage: 1, Wash, 10, 0, Fresh Water, , 0, 0									
Stage: 1, Wash, 10, 0, Super Flush, , 0, 0									
Stage: 1, Wash, 10, 0, Gel Sweep, , 0, 0									
Stage: 1, Wash, 10, 0, Fresh Water w/Flocele, , 0, 0									
Stage: 1, Lead, 0, 230, 50-50 Pozmix w/8% Gel, 10% Cal-Seal, 0.25 lb/sk Flocele, Pozmix, 1.97, 12.5									
Stage: 1, Tail, 0, 135, Premium Plus w/10% Cal-Seal, 1% CaCl2, 0.25 lb/sk Flocele, Class G, 1.6, 14.2									
Stage: 1, Displacement, 63.5, 0, Fresh Water, , 0, 0									

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

SUBMIT IN DUPLICATE*
(See other in-
structions on
reverse side)

FORM APPROVED
OMB NO. 1004-0137
Expires: February 28, 1995

011

WELL COMPLETION OR RECOMPLETION REPORT AND LOG*

TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> DRY <input type="checkbox"/> OTHER _____	7. UNIT AGREEMENT
TYPE OF COMPLETION NEW WELL <input checked="" type="checkbox"/> WORK OVER <input type="checkbox"/> DEEPEN <input type="checkbox"/> PLUG BACK <input type="checkbox"/> DIFF. RES. <input type="checkbox"/> OTHER Ferron Coal	8. FARM OR LEASE NAME Wellington Federal 32-06

2. NAME OF OPERATOR Westport Oil and Gas Company, L. P.	9. API WELL NO. 43-007-30895
---	--

3. ADDRESS OF OPERATOR 1670 Broadway, Suite 2800, Denver, CO 80202-4800	10. FIELD NAME Helper
---	---------------------------------

4. LOCATION OF WELL, Show quarter-quarter description and footage measurements At surface SWNE 1854' FNL, 1625' FEL	11. SEC. T, R, M., OR BLOCK AND SURVEY OR AREA S.L.B.&M.
At top prod. interval, reported below	12. COUNTY OR PARISH Carbon
	13. STATE UT

14. PERMIT NO.	DATE ISSUED	12. COUNTY OR PARISH Carbon	13. STATE UT
----------------	-------------	---------------------------------------	------------------------

15. DATE SPUDDED 9/16/2003	16. DATE T.D. REACHED 9/19/2003	17. DATE COMPL. (Ready to Prod.) 11/29/2003	18. ELEVATIONS (DF, RKB, RT, GR, etc.)* 6150'	19. ELEV. CASINGHEAD
--------------------------------------	---	---	---	----------------------

20. Total Depth (MD & TVD) 2760'	21. Plug back T.D. (MD & TVD) 2752'	22. If Multiple Compl., How Many*	23. ROTARY TOOLS	CABLE TOOLS
--	---	-----------------------------------	------------------	-------------

24. PRODUCING INTERVAL (S), THIS COMPLETION, TOP, BOTTOM, NAME (MD & TVD) Ferron 2241' (top)	25. WAS DIRECTIONAL SURVEY MADE
--	---------------------------------

26. TYPE ELECTRIC AND OTHER LOGS RUN (Circle those filed) DIL/GL w/ GR & CNDL/GR GR-CCL-CBL - Rec 10-6-03	27. Was Well Cored
--	--------------------

28. CASING RECORD (Report all strings set in well)				
CASING SIZE	WEIGHT LB/FT.	DEPTH SET (MD)	HOLE SIZE	CEMENTING RECORD
12.75"	29.31#	58'	14.75"	
8.625"	24#	335'	11"	150 sxs Prem Class A + additives
5.5"	17#	2760'	7.875"	230 sxs 50/50 Pozmix & 135 sxs Prem Plus Class G + additives

29. LINER RECORD				30. TUBING RECORD		
SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT	SCREEN (MD)	SIZE	DEPTH SET (MD)
					2.375	194.72'
					2.875	2231'


31. PERFORATION RECORD (Interval, size, and number) See attached sheet for perforation record	32. ACID, SHOT, Depth Set (MD) DEPTH INTERVAL (MD) Amt. & Kind of Material Used See attached sheet for frac details
---	--

33. PRODUCTION		
DATE FIRST PRODUCTION 12/8/2003	Producing Method (Flowing, gas, lift, pumping- size & type of pump) Progressive Cavity Pump	WELL STATUS (p prod. or shut-in) P

DATE OF TEST	HOURS TESTED	CHOKE SIZE	PROD'N. FOR TEST PERIOD >>>>-->	OIL, BBLs	GAS, MCF	WATER- BBL	GAS-OIL RATIO
FLOW TUBING PRESS.	CASING PRESSURE	CALCULATED 24- HOUR RATE >>>>-->		OIL, BBLs	GAS, MCF	WATER- BBL	OIL GRAVITY- API

34. DISPOSITION OF GAS (Sold, used for fuel, vented, ect.)	Test Witnessed By
--	-------------------

35. LIST OF ATTACHMENTS Perforations and Frac Information attached
--

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records.
SIGNED  TITLE Senior Production Engineer DIV. OF OIL, GAS & MINING

RECEIVED
FEB 03 2004
January 30, 2004

*See Instructions and Spaces for Additional Data on Reverse Side

17. SUMMARY OF POROUS ZONES. (Show all important zones of porosity and contents thereof, cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries).

38. GEOLOGIC MARKERS	TOP		DESCRIPTION, CONTENTS, ETC.	BOTTOM		TOP		TRUE	
	MEAS. DEPTH	VERT. DEPTH		MEAS. DEPTH	VERT. DEPTH	MEAS. DEPTH	VERT. DEPTH	MEAS. DEPTH	VERT. DEPTH
	Mancos	0							
	Bentonite	2304'							
	Ferron	2434'							
	Tununk	2734'							

Wellington Federal 32-06
API No. 4300730895

Perforations	2384' - 2394'	10'	40 holes
3 3/8" casing gun w/ 4 JSPF	2373' - 2380'	7'	28 holes
90 degree phasing - status open	2364' - 2370'	6'	24 holes
	2340' - 2343'	3'	12 holes
	2331' - 2333'	2'	8 holes
	2312' - 2321'	9'	36 holes
	2297' - 2304'	7'	28 holes
	2270' - 2283'	7'	28 holes
	2262' - 2266'	4'	16 holes
	2252' - 2256'	4'	16 holes

2384' - 2394'
 2373' - 2380'
 2364' - 2370'

Frac Lower Zone: Pump water, load casing @ 5 BPM breakdown formation 1236-927 psi @ 5 BPM, pump 500 gals 15% HCL @ 5 BPM @ 725 psi, pump 14,003 gals 20# Delta 140 PAD @ 67 BPM @ 1143-2308 psi, pump 4630 gals Delta 140 @ 0.25#/gal @ 82 BPM @ 2229 psi, pump 44,602 gals Delta 140.5# to 5.0# sand ramp @ 81 BPM @ 2230-2738 psi, fluid w/ 4408 gals @ 83 BPM @ 2800 psi. ISIP 1484 psi, 5 min 1169 psi, 10 min 1084 psi, 15 min 1015 psi. Average rate 81.5 BPM, Average pressure 2300 psi, Maximum pressure 2800 psi. Total fluid pumped 1623 bbls. Total proppant 115,000#.

2340' - 2343'
 2331' - 2333'
 2312' - 2321'
 2297' - 2304'

Frac #2 Zone: Pump and breakdown formation @ 1777-1495 psi @ 5 BPM, pump 500 gals 15% HCL @ 5 BPM @ 1500 psi, pump 14,046 gals Delta 140 PAD @ 37 BPM @ 2012-2343 psi, 4212 gals Delta 140 w/ 0.25#/gal sand @ 2343-2298 psi @ 80 BPM, pump 41,768 gals Delta 140 w/ 0.5 - 5.0#/gal sand ramp @ 80 BPM @ 2298-2289 psi, flush w/ 4377 gals @ 83 BPM @ 2289-2400 psi. ISIP 1592 psi, 5 min 1354 psi, 10 min 1247 psi, 15 min 1160 psi. Average rate 81 BPM, Average pressure 2250 psi, Maximum pressure 2415 psi. Total fluid pumped 1548 bbls. Total proppant 115,000#.

2270' - 2283'
 2262' - 2266'
 2252' - 2256'

Frac Upper Zone: 200 gals @ 10 BPM and breakdown formation 2219-727 psi, pump 500 gals 15% HCL @ 5 BPM @ 700 psi, pump 14,035 gals Delta 140 PAD @ 63 BPM @ 2209-2515 psi, pump 4626 gals Delta 140 w/ 0.25#/gal sand @ 81 BPM @ 2515-2495 psi, pump 43,568 gals Delta 140 w/ 0.5 - 5.0#/gal ramp @ 81 BPM @ 2495-2496 psi, flush w/ 4299 gals. ISIP 1586 psi, 5 min 1372 psi, 10 min 1322 psi, 15 min 1250 psi. Average rate 78 BPM, Average pressure 2400 psi, Maximum pressure 2520 psi. Total fluid pumped 1591 bbls. Total proppant pumped 115,600#.



WESTPORT OIL AND GAS COMPANY, L.P.

1670 Broadway Suite 2800 Denver Colorado 80202
Telephone: 303 573 5404 Fax: 303 573 5609

January 30, 2004

State of Utah
Department of Natural Resources
Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
Salt Lake City, Utah 84114-5801

Attn: Carol Daniels

RE: Form 8 and BLM Well Completion Reports
Township 13S & 14S – Range 11E S.L.B.&M.

ML-48135	North Bench State 12-32	API # 4300730908
ML-48135	North Bench State 23-32	API # 4300730909
ML-48135	North Bench State 32-32	API # 4300730910
UTU-80560	Wellington Federal 32-05	API # 4300730846
UTU-80561	Wellington Federal 22-06	API # 4300730917
UTU-80561	Wellington Federal 32-06	API # 4300730895
UTU-80561	Wellington Federal 43-06	API # 4300730918
UTU-80561	Wellington Fed 44-06 SWD	API # 4300730912

Carbon County, Utah

Dear Ms. Daniels:

Please find enclosed, submitted in duplicate, either Form 8 or the BLM form "Well Completion Reports" for the above referenced wells for your consideration and approval. Each report is accompanied by an attachment detailing information which could not be adequately typed into the small areas on the forms.

I want to thank you in advance for your patience in these matters. Should any questions arise, please do not hesitate contacting the undersigned.

Very truly yours,
WESTPORT OIL AND GAS COMPANY, L. P.

Debby J. Black

Debby J. Black
Engineering Technician
dblack@westportresourcescorp.com
303-575-0113

djb
encl:

Note: Logs were previously submitted to authorities via the logging company.

RECEIVED

FEB 03 2004

DIV. OF OIL, GAS & MINING

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING

1. DJJ

2. CDW

X Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

1/6/2006

FROM: (Old Operator):
 N2115-Westport Oil & Gas Co., LP
 1368 South 1200 East
 Vernal, UT 84078
 Phone: 1-(435) 781-7024

TO: (New Operator):
 N2995-Kerr-McGee Oil & Gas Onshore, LP
 1368 South 1200 East
 Vernal, UT 84078
 Phone: 1-(435) 781-7024

CA No.

Unit:

WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
-----------	-----	-----	-----	--------	-----------	------------	-----------	-------------

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- a. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- b. If **NO**, the operator was contacted on: _____
- a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- b. Inspections of LA PA state/fee well sites complete on: n/a
- c. Reports current for Production/Disposition & Sundries on: ok

6. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet

7. Federal and Indian Units:

The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006

8. Federal and Indian Communization Agreements ("CA"):

The BLM or BIA has approved the operator for all wells listed within a CA on: n/a

9. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: _____

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 5/15/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
- Bond information entered in RBDMS on: 5/15/2006
- Fee/State wells attached to bond in RBDMS on: 5/16/2006
- Injection Projects to new operator in RBDMS on: _____
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: CO1203
- Indian well(s) covered by Bond Number: RLB0005239
- (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- a. The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG
 The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

COMMENTS:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR-McGEE OIL & GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEE ATTACHED

5. Lease Serial No.
MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State
UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006.
 KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

RECEIVED

MAY 10 2006

DIV. OF OIL, GAS & MINING

*BLM BOND = C01203
 BIA BOND = RLB0005239*

APPROVED 5116106

Earlene Russell

**Division of Oil, Gas and Mining
 Earlene Russell, Engineering Technician**

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) RANDY BAYNE	Title DRILLING MANAGER
Signature <i>Randy Bayne</i>	Date May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

5. Lease Serial No.
MULTIPLE LEASES
6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

8. Well Name and No.

2. Name of Operator

MUTIPLE WELLS

WESTPORT OIL & GAS COMPANY L.P.

9. API Well No.

3a. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

10. Field and Pool, or Exploratory Area

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED

11. County or Parish, State

UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomplate in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

APPROVED 5/16/06
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

RECEIVED
MAY 10 2006

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) BRAD LANEY	Title ENGINEERING SPECIALIST
Signature <i>Brad Laney</i>	Date May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by <i>Brad Laney</i>	Title	Date 5-9-06
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
Colorado State Office
2850 Youngfield Street
Lakewood, Colorado 80215-7076

IN REPLY REFER TO:

CO922 (MM)
3106
COC017387 et. al.

March 23, 2006

NOTICE

Kerr-McGee Oil & Gas Onshore L.P. :
1999 Broadway, Suite 3700 : Oil & Gas
Denver, CO 80202 :

Merger/Name Change - Recognized

On February 28, 2006 this office received acceptable evidence of the following mergers and name conversion:

Kerr-McGee Oil & Gas Onshore L.P., a Delaware Limited Partnership, and Kerr-McGee Oil & Gas Onshore LLC, a Delaware Limited Partnership merger with and into Westport Oil and Gas Company L.P., a Delaware Limited Partnership, and subsequent Westport Oil & Gas Company L.P. name conversion to Kerr-McGee Oil & Gas Onshore L.P.

For our purposes the merger and name conversion was effective January 4, 2006, the date the Secretary of State of Delaware authenticated the mergers and name conversion.

Kerr-McGee Oil & Gas Onshore L.P. provided a list of oil and gas leases held by the merging parties with the request that the Bureau of Land Management change all their lease records from the named entities to the new entity, Kerr-McGee Oil & Gas Onshore L.P. In response to this request each state is asked to retrieve their own list of leases in the names of these entities from the Bureau of Land Management's (BLM) automated LR2000 data base.

The oil and gas lease files identified on the list provided by Kerr-McGee Oil & Gas Onshore L.P. have been updated as to the merger and name conversion. We have not abstracted the lease files to determine if the entities affected by the acceptance of these documents holds an interest in the lease, nor have we attempt to identify leases where the entity is the operator on the ground that maintains vested record title or operating rights interests. If additional documentation, for change of operator, is required you will be contacted directly by the appropriate Field Office. The Mineral Management Services (MMS) and other applicable BLM offices were notified of the merger with a copy of this notice

Please contact this office if you identify additional leases where the merging party maintains an interest, under our jurisdiction, and we will document the case files with a copy of this notice. If the leases are under the jurisdiction of another State Office that information will be forwarded to them for their action.

Three riders accompanied the merger/name conversion documents which will add Kerr-McGee Oil and Gas Onshore LLC as a principal to the 3 Kerr-McGee bonds maintained by the Wyoming State Office. These riders will be forward to them for their acceptance.

The Nationwide Oil & Gas Continental Casualty Company Bond #158626364 (BLM Bond #CO1203), maintained by the Colorado State Office, will remain in full force and effect until an assumption rider is accepted by the Wyoming State Office that conditions their Nationwide Safeco bond to accept all outstanding liability on the oil and gas leases attached to the Colorado bond.

If you have questions about this action you may call me at 303.239.3768.

/s/Martha L. Maxwell
Martha L. Maxwell
Land Law Examiner
Fluid Minerals Adjudication

Attachment:

List of OG Leases to each of the following offices:
MMS MRM, MS 357B-1
WY, UT, NM/OK/TX, MT/ND, WY State Offices
CO Field Offices

Wyoming State Office

Rider #1 to Bond WY2357
Rider #2 to Bond WY1865
Rider #3 to Bond WY1127



United States Department of the Interior



BUREAU OF LAND MANAGEMENT
Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155
<http://www.blm.gov>

IN REPLY REFER TO:
3106
(UT-922)

March 27, 2006

Memorandum

To: Vernal Field Office

From: Chief, Branch of Fluid Minerals

Subject: Merger Approval

Attached is an approved copy of the merger recognized by the Bureau of Land Management, Colorado State Office. We have updated our records to reflect the merger from Westport Oil and Gas Company L.P. into Kerr-McGee Onshore Oil and Gas Company. The merger was approved effective January 4, 2006.

Chief, Branch of
Fluid Minerals

Enclosure

Approval letter from BLM COSO (2 pp)

cc: MMS, Reference Data Branch, James Sykes, PO Box 25165, Denver CO 80225
State of Utah, DOGM, Attn: Earlene Russell, PO Box 145801, SLC UT 84114
Teresa Thompson
Joe Incardine
Connie Seare
Dave Mascarenas
Susan Bauman

RECEIVED

MAR 28 2006

U.S. DEPT. OF THE INTERIOR
BUREAU OF LAND MANAGEMENT