

# COPY

Form 3160-3  
(April 2004)

**BBC**  
**CONFIDENTIAL**

FORM APPROVED  
OMB No. 1004-0137  
Expires March 31, 2007

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT



**APPLICATION FOR PERMIT TO DRILL OR REENTER**

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. <b>UTU-73669</b>
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name <b>n/a</b>
2. Name of Operator <b>BILL BARRETT CORPORATION</b>		7. If Unit or CA Agreement, Name and No. <b>Prickly Pear Unit/UTU-079487</b>
3a. Address <b>1099 18th Street, Suite 2300 Denver CO 80202</b>		8. Lease Name and Well No. <b>Prickly Pear Unit Fed #1-19-12-15</b>
3b. Phone No. (include area code) <b>(303) 312-8134</b>		9. API Well No. <b>pending 43-007-31286</b>
4. Location of Well (Report location clearly and in accordance with any State requirements.)* <b>39.765184</b> At surface <b>NENE, 465' FNL, 633' FEL 5624074</b> At proposed prod. zone <b>same 44017407110.271401</b>		10. Field and Pool, or Exploratory <b>Prickly Pear/Wasatch-Mesaverde</b>
11. Sec., T. R. M. or Blk. and Survey or Area <b>Sec. 19, T12S-R15E</b>		12. County or Parish <b>Carbon</b>
13. State <b>UT</b>		
14. Distance in miles and direction from nearest town or post office* <b>approximately 45 miles from Myton, Utah</b>	15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) <b>465'</b>	16. No. of acres in lease <b>1200.61</b>
17. Spacing Unit dedicated to this well <b>40 acres</b>	18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. <b>3871'</b>	19. Proposed Depth <b>7500'</b>
20. BLM/BIA Bond No. on file <b>Nationwide Bond #WYB000040</b>	21. Elevations (Show whether DF, KDB, RT, GL, etc.) <b>7523' ungraded ground</b>	22. Approximate date work will start* <b>09/10/2007</b>
23. Estimated duration <b>45 days</b>		

**24. Attachments**

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature 	Name (Printed/Typed) <b>Tracey Fallang</b>	Date <b>04/18/2007</b>
Title <b>Environmental/Regulatory Analyst</b>		
Approved by (Signature) 	Name (Printed/Typed) <b>BRADLEY G. HILL</b>	Date <b>04-26-07</b>
Title <b>ENVIRONMENTAL MANAGER</b>		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on page 2)

**Federal Approval of this  
Action is Necessary**

**RECEIVED**

**APR 20 2007**

**DIV. OF OIL, GAS & MINING**

R  
14  
ER  
15  
E

T12S, R15E, S.L.B.&amp;M.

C.C.  
Brass Cap

N89°59'27"W - 2185.14' (Meas.)

S89°58'23"W - 2644.88' (Meas.)

1909 Brass Cap  
2.0' High, Pile  
of Stone1909 Brass  
Cap 0.6' High,  
Tee Post233.64'  
(G.L.O.)

LOT 1

PRICKLY PEAR UNIT FEDERAL

#1-19-12-15

Elev. Ungraded Ground = 7523'

465'

633'

LOT 2

19

LOT 3

LOT 4

C.C.  
Brass Cap

Brass Cap

1909 Brass Cap  
1.4' High

S89°33'50"W - 2231.60' (Meas.)

S89°49'59"W - 2645.44' (Meas.)

184.80'  
(G.L.O.)

N00°01'22"E - 5299.81' (Meas.)

24

N00°25'E - 5233.80' (G.L.O.)

## LEGEND:

└─┘ = 90° SYMBOL

● = PROPOSED WELL HEAD.

▲ = SECTION CORNERS LOCATED.

(NAD 83)

LATITUDE = 39°45'54.61" (39.765169)

LONGITUDE = 110°16'20.13" (110.272258)

(NAD 27)

LATITUDE = 39°45'54.74" (39.765206)

LONGITUDE = 110°16'17.57" (110.271547)

## BILL BARRETT CORPORATION


Well location, PRICKLY PEAR UNIT FEDERAL  
#1-19-12-15, located as shown in the NE 1/4  
NE 1/4 of Section 19, T12S, R15E, S.L.B.&M.,  
Carbon County, Utah.

## BASIS OF ELEVATION

COTTON TRIANGULATION STATION LOCATED IN THE NW 1/4 OF  
SECTION 31, T12S, R16E, S.L.B.&M. TAKEN FROM THE TWIN  
HOLLOW QUADRANGLE, UTAH, CARBON COUNTY, 7.5 MINUTE  
SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED  
STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY.  
SAID ELEVATION IS MARKED AS BEING 7386 FEET.


## BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

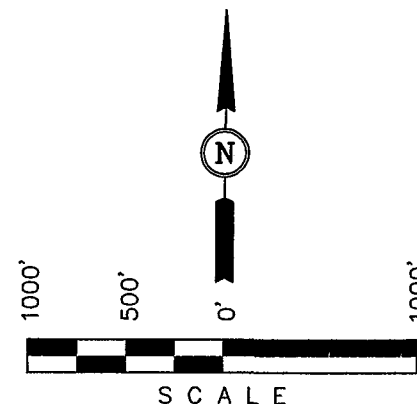

## CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM  
FIELD NOTES OF ACTUAL SURVEY MADE BY ME OR UNDER MY  
SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE  
BEST OF MY KNOWLEDGE AND BELIEF.

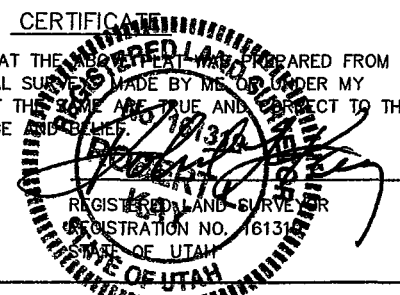

UINTAH ENGINEERING &amp; LAND SURVEYING

85 SOUTH 200 EAST - VERNAL, UTAH 84078

(435) 789-1017

SCALE  
1" = 1000'DATE SURVEYED:  
08-18-06DATE DRAWN:  
08-29-06PARTY  
B.H. F.Y. P.M.REFERENCES  
G.L.O. PLATWEATHER  
HOTFILE  
BILL BARRETT CORPORATION

## **HAZARDOUS MATERIAL DECLARATION**

FOR WELL NO. PRICKLY PEAR UNIT FEDERAL #1-19-12-15  
LEASE NO. UTU 73669

Bill Barrett Corporation guarantees that during the drilling and completion of the above referenced well, we will not use, produce, or store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Super Amendments and Reauthorization Act (SARA) of 1986.

Bill Barrett Corporation guarantees that during the drilling and completion of the above referenced well, we will use, produce, store, transport, or dispose less than the threshold planning quantity (TPQ) of any extremely hazardous substances as defined in 40 CFR 355.

## DRILLING PROGRAM

BILL BARRETT CORPORATION

### Prickly Pear Unit Federal #1-19-12-15

NENE, 465' FNL, 633' FEL, Sec. 19-T12S-R15E (Surface Hole)

Section 19, T12S-R15E

Carbon County, Utah

---

#### 1 – 3. Estimated Tops of Geological Markers and Formations Expected to Contain Water, Oil and Gas and Other Minerals

<u>Formation</u>	<u>Depth - MD</u>
Green River	Surface
Wasatch	2820'*
North Horn	4700'*
Dark Canyon	6430'*
Price River	6640'*
TD	7500'*

#### **PROSPECTIVE PAY**

\*Members of the Mesaverde formation and Wasatch formation (inclusive of the North Horn) are primary objectives for oil/gas.

#### 4. Casing Program

<u>Hole Size</u>	<u>SETTING DEPTH</u>		<u>Casing Size</u>	<u>Casing Weight</u>	<u>Casing Grade</u>	<u>Thread</u>	<u>Condition</u>
	<u>(FROM)</u>	<u>(TO)</u>					
12 ¼"	surface	1,000'	9 5/8"	36#	J or K 55	ST&C	New
8 3/4"	surface	7,500'	5 ½"	17#	N-80	LT&C	New

Note: Pending evaluation of anticipated stress on the production casing, BBC may use 5 ½", 20# P-110 LT&C production casing instead of the 17# N-80. BBC is also evaluating the benefit of using 4-1/2", 11.6#, I-80, LT&C production casing and wishes to have that option approved in this APD. The 4-1/2" casing design sheet is included in this package. Cement volumes would be adjusted accordingly.

#### 5. Cementing Program

9 5/8" Surface Casing	Approximately 240 sx Halliburton Light Premium with additives mixed at 12.7 ppg (yield = 1.85 ft <sup>3</sup> /sx) and 170 sx Premium cement with additives mixed at 15.8 ppg (yield = 1.16 ft <sup>3</sup> /sx) circulated to surface with 100% excess
5 ½" Production Casing	Approximately 1460 sx 50/50 Poz Premium cement with additives mixed at 13.4 ppg (yield = 1.49 ft <sup>3</sup> /sx). Top of cement to be determined by log and sample evaluation; estimated TOC 900'.

Note: Actual volumes to be calculated from caliper log.

6. **Mud Program**

<u>Interval</u>	<u>Weight</u>	<u>Viscosity</u>	<u>Fluid Loss (API filtrate)</u>	<u>Remarks</u>
0 – 40'	8.3 – 8.6	27 – 40	--	Native Spud Mud
40' – 1000'	8.3 – 8.6	27 – 40	15 cc or less	Native/Gel/Lime
1000' – TD	8.6 – 9.5	38-46	15 cc or less	LSND/DAP
Note: Sufficient mud materials to maintain mud properties, control lost circulation and to contain "kicks" will be available at wellsite. BBC may require minor amounts of diesel to be added to its fluid system in order to reduce tork and drag.				

7. **BOP and Pressure Containment Data**

<u>Depth Intervals</u>	<u>BOP Equipment</u>
0 – 1000'	No pressure control required
1000' – TD	11" 3000# Ram Type BOP 11" 3000# Annular BOP
- Drilling spool to accommodate choke and kill lines;	
- Ancillary and choke manifold to be rated @ 3000 psi;	
- Ancillary equipment and choke manifold rated at 3,000#. All BOP and BOPE tests will be in accordance with the requirements of onshore Order No. 2;	
- The BLM and the State of Utah Division of Oil, Gas and Mining will be notified 24 hours in advance of all BOP pressure tests.	
- BOP hand wheels may be underneath the sub-structure of the rig if the drilling rig used is set up to operate most efficiently in this manner.	

8. **Auxiliary Equipment**

- Upper kelly cock; lower Kelly cock will be installed while drilling
- Inside BOP or stab-in valve (available on rig floor)
- Safety valve(s) and subs to fit all string connections in use
- Mud monitoring will be visually observed

9. **Testing, Logging and Core Programs**

Cores	None anticipated;
Testing	None anticipated; drill stem tests may be run on shows of interest;
Sampling	30' to 50' samples; surface casing to TD. Preserve samples all show intervals;
Surveys	Run every 1000' and on trips, slope only;
Logging	DIL-GR-SP, FDC-CNL-GR-CAL-Pe-Microlog, Sonic-GR, all TD to surface.

**10. Anticipated Abnormal Pressures or Temperatures**

No abnormal pressures or temperatures or other hazards are anticipated.

Maximum anticipated bottom hole pressure equals approximately 3705 psi\* and maximum anticipated surface pressure equals approximately 2055 psi\*\* (bottom hole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

\*Max Mud Wt x 0.052 x TD = A (bottom hole pressure)

\*\*Maximum surface pressure = A - (0.22 x TD)

**11. Drilling Schedule**

Location Construction:	September 10, 2007
Spud:	September 17, 2007
Duration:	15 days drilling time
	30 days completion time



# Bill Barrett Corporation

## NINE MILE CEMENT VOLUMES

Well Name: **Prickly Pear Unit Federal 1-19-12-15**

### Surface Hole Data:

Total Depth:	1,000'
Top of Cement:	0'
OD of Hole:	12.250"
OD of Casing:	9.625"

### Calculated Data:

Lead Volume:	219.2	ft <sup>3</sup>
Lead Fill:	700'	
Tail Volume:	94.0	ft <sup>3</sup>
Tail Fill:	300'	

### Cement Data:

Lead Yield:	1.85	ft <sup>3</sup> /sk
Tail Yield:	1.16	ft <sup>3</sup> /sk
% Excess:	100%	

### Calculated # of Sacks:

# SK's Lead:	240
# SK's Tail:	170

### Production Hole Data:

Total Depth:	7,500'
Top of Cement:	900'
OD of Hole:	8.750"
OD of Casing:	5.500"

### Calculated Data:

Lead Volume:	1667.1	ft <sup>3</sup>
Lead Fill:	6,600'	

### Cement Data:

Lead Yield:	1.49	ft <sup>3</sup> /sk
% Excess:	30%	

### Calculated # of Sacks:

# SK's Lead:	1460
--------------	------

<b>Prickly Pear Unit Federal 1-19-12-15 Proposed Cementing Program</b>
--

<u>Job Recommendation</u>	<u>Surface Casing</u>		
<b>Lead Cement - (700' - 0')</b>			
Halliburton Light Premium	Fluid Weight:	12.7	lbm/gal
2.0% Calcium Chloride	Slurry Yield:	1.85	ft <sup>3</sup> /sk
0.125 lbm/sk Ploy-E-Flake	Total Mixing Fluid:	9.9	Gal/sk
	Top of Fluid:	0'	
	Calculated Fill:	700'	
	Volume:	78.09	bbl
	<b>Proposed Sacks:</b>	<b>240</b>	<b>sks</b>
<b>Tail Cement - (1000' - 700')</b>			
Premium Cement	Fluid Weight:	15.8	lbm/gal
94 lbm/sk Premium Cement	Slurry Yield:	1.16	ft <sup>3</sup> /sk
2.0% Calcium Chloride	Total Mixing Fluid:	4.97	Gal/sk
0.125 lbm/sk Ploy-E-Flake	Top of Fluid:	700'	
	Calculated Fill:	300'	
	Volume:	33.47	bbl
	<b>Proposed Sacks:</b>	<b>170</b>	<b>sks</b>

<u>Job Recommendation</u>	<u>Production Casing</u>		
<b>Lead Cement - (7500' - 900')</b>			
50/50 Poz Premium	Fluid Weight:	13.4	lbm/gal
3.0 % KCL	Slurry Yield:	1.49	ft <sup>3</sup> /sk
0.75% Halad®-322	Total Mixing Fluid:	7.06	Gal/sk
3.0 lbm/sk Silicalite Compacted	Top of Fluid:	900'	
0.2% FWCA	Calculated Fill:	6,600'	
0.125 lbm/sk Poly-E-Flake	Volume:	385.97	bbl
1.0 lbm/sk Granulite TR 1/4	<b>Proposed Sacks:</b>	<b>1460</b>	<b>sks</b>



Well name:	Utah: West Tavaputs Field
Operator:	Bill Barrett
String type:	Surface
Location:	Carbon County, UT

**Design parameters:**

Collapse

Mud weight: 9.50 ppg

Design is based on evacuated pipe.

**Minimum design factors:**

Collapse:

Design factor 1.125

**Environment:**

H2S considered? No

Surface temperature: 75.00 °F

Bottom hole temperature: 89 °F

Temperature gradient: 1.40 °F/100ft

Minimum section length: 1,000 ft

Burst:

Design factor 1.00

Cement top: Surface

Burst

Max anticipated surface

pressure: 2,735 psi

Internal gradient: 0.22 psi/ft

Calculated BHP 2,955 psi

Annular backup: 9.50 ppg

Tension:

8 Round STC: 1.80 (J)

8 Round LTC: 1.80 (J)

Buttress: 1.80 (J)

Premium: 1.80 (J)

Body yield: 1.80 (B)

Tension is based on buoyed weight.

Neutral point: 859 ft

Non-directional string.

Re subsequent strings:

Next setting depth: 10,000 ft

Next mud weight: 9.500 ppg

Next setting BHP: 4,935 psi

Fracture mud wt: 10.000 ppg

Fracture depth: 10,000 ft

Injection pressure 5,195 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	1000	9.625	36.00	J/K-55	ST&C	1000	1000	8.796	71.2
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	493	2020	4.094	2735	3520	1.29	31	453	14.64 J

Prepared Dominic Spencer  
by: Bill Barrett

Phone: (303) 312-8143  
FAX: (303) 312-8195

Date: August 1, 2003  
Denver, Colorado

**Remarks:**

Collapse is based on a vertical depth of 1000 ft, a mud weight of 9.5 ppg. The casing is considered to be evacuated for collapse purposes.

Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	Utah: West Tavaputs
Operator:	Bill Barrett
String type:	Production
Location:	Carbon County, UT

**Design parameters:**

Collapse

Mud weight: 9.50 ppg

Design is based on evacuated pipe.

**Minimum design factors:**

Collapse:

Design factor 1.125

**Environment:**

H2S considered? No

Surface temperature: 75.00 °F

Bottom hole temperature: 215 °F

Temperature gradient: 1.40 °F/100ft

Minimum section length: 1,500 ft

Burst:

Design factor 1.00

Cement top: 2,375 ft

Burst

Max anticipated surface

pressure: 4,705 psi

Internal gradient: 0.02 psi/ft

Calculated BHP 4,935 psi

Annular backup: 9.50 ppg

Tension:

8 Round STC: 1.80 (J)

8 Round LTC: 1.80 (J)

Buttress: 1.80 (J)

Premium: 1.80 (J)

Body yield: 1.80 (B)

Non-directional string.

Tension is based on buoyed weight.

Neutral point: 8,559 ft

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	10000	5.5	17.00	N-80	LT&C	10000	10000	4.767	344.6
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	4935	6290	1.275	4705	7740	1.65	146	348	2.39 J

Prepared Dominic Spencer  
by: Bill Barrett

Phone: (303) 312-8143  
FAX: (303) 312-8195

Date: August 1, 2003  
Denver, Colorado

**Remarks:**

Collapse is based on a vertical depth of 10000 ft, a mud weight of 9.5 ppg. The casing is considered to be evacuated for collapse purposes.  
Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	West Tavaputs General
Operator:	Bill Barrett
String type:	Production
Location:	Carbon County, Utah

**Design parameters:**

Collapse

Mud weight: 9.50 ppg

Design is based on evacuated pipe.

**Minimum design factors:**

Collapse:

Design factor 1.125

**Environment:**

H2S considered? No  
 Surface temperature: 75.00 °F  
 Bottom hole temperature: 189 °F  
 Temperature gradient: 1.40 °F/100ft  
 Minimum section length: 1,500 ft

Burst:

Design factor 1.00

Cement top: 2,500 ft

Burst

Max anticipated surface

pressure: 2,226 psi

Internal gradient: 0.22 psi/ft

Calculated BHP 4,016 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)  
 8 Round LTC: 1.80 (J)  
 Buttress: 1.60 (J)  
 Premium: 1.50 (J)  
 Body yield: 1.50 (B)

**Directional Info - Build & Drop**

Kick-off point 1000 ft  
 Departure at shoe: 2165 ft  
 Maximum dogleg: 2 °/100ft  
 Inclination at shoe: 0 °

Tension is based on buoyed weight.

Neutral point: 7,560 ft

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	8730	5.5	20.00	P-110	LT&C	8138	8730	4.653	353.3
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	4016	11100	2.764	4016	12630	3.14	139	548	3.93 J

Prepared: Dominic Spencer  
 by: Bill Barrett Corporation

Phone: (303) 312-8143  
 FAX: (303) 312-8195

Date: August 25, 2004  
 Denver, Colorado

**Remarks:**

Collapse is based on a vertical depth of 8138 ft, a mud weight of 9.5 ppg. The casing is considered to be evacuated for collapse purposes.  
 Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Collapse strength is (biaxially) derated for doglegs in directional wells by multiplying the tensile stress by the cross section area to calculate a tensile load which is added to the axial load.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:

## West Tavaputs General

Operator: Bill Barrett Corporation

String type: Production

## Design parameters:

Collapse

Mud weight: 9.50 ppg

Design is based on evacuated pipe.

Burst

Max anticipated surface

pressure: 2,735 psi

Internal gradient: 0.22 psi/ft

Calculated BHP 4,935 psi

No backup mud specified.

## Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Tension:

8 Round STC: 1.80 (J)

8 Round LTC: 1.80 (J)

Buttress: 1.80 (J)

Premium: 1.80 (J)

Body yield: 1.80 (B)

Tension is based on buoyed weight.

Neutral point: 8,580 ft

## Environment:

H2S considered?

No

Surface temperature:

60.00 °F

Bottom hole temperature:

200 °F

Temperature gradient:

1.40 °F/100ft

Minimum section length:

1,500 ft

Cement top:

2,500 ft

Non-directional string.

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	10000	4.5	11.60	I-80	LT&C	10000	10000	3.875	231.8
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	4935	6350	1.287	4935	7780	1.58	100	223	2.24 J

Prepared Dominic Spencer

by: Bill Barrett

Phone: (303) 312-8143

FAX: (303) 312-8195

Date: December 13, 2005

Denver, Colorado

## Remarks:

Collapse is based on a vertical depth of 10000 ft, a mud weight of 9.5 ppg. The casing is considered to be evacuated for collapse purposes.

Collapse strength is based on the Westcott, Dunlop &amp; Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

## **PRESSURE CONTROL EQUIPMENT – Schematic Attached**

**A. Type:** Eleven (11) Inch Double Gate Hydraulic BOP with Eleven (11) Inch Annular Preventer. The blow out preventer will be equipped as follows:

1. One (1) blind ram (above).
2. One (1) pipe ram (below).
3. Drilling spool with two (2) side outlets (choke side 3-inch minimum, kill side 2-inch minimum).
4. 3-inch diameter choke line.
5. Two (2) choke line valves (3-inch minimum).
6. Kill line (2-inch minimum).
7. Two (2) chokes.
8. Two (2) kill line valves, one of which shall be a check valve (2-inch minimum).
9. Upper kelly cock valve with handles available.
10. Safety valve(s) & subs to fit all drill string connections in use.
11. Pressure gauge on choke manifold.
12. Fill-up line above the uppermost preventer.

**B. Pressure Rating:** 3,000 psi

**C. Testing Procedure:**

### Annular Preventer

At a minimum, the Annular Preventer will be pressure tested to 50% of the rated working pressure for a period of ten (10) minutes or until provisions of the test are met, whichever is longer.

At a minimum the above pressure test will be performed:

1. When the annular preventer is initially installed;
2. Whenever any seal subject to test pressure is broken;
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition, the Annular Preventer will be functionally operated at least weekly.

### Blow-Out Preventer

At a minimum, the BOP, choke manifold, and related equipment will be pressure tested to the approved working pressure of the BOP stack (if isolated from the surface casing by a test plug) or to 70% of the internal yield strength of the surface casing (if the BOP is not isolated from the casing by a test plug). Pressure will be

maintained for a period of at least ten (10) minutes or until the requirements of the test are met, whichever is longer.

At a minimum, the above pressure test will be performed:

1. When the BOP is initially installed;
2. Whenever any seal subject to test pressure is broken;
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition the pipe and blind rams will be activated each trip, but not more than once each day. All BOP drills and tests will be recorded in the IADC driller's log.

#### **D. Choke Manifold Equipment:**

All choke lines will be straight lines unless turns use tee blocks or are targeted with running tees, and will be anchored to prevent whip and vibration.

#### **E. Accumulator:**

The accumulator will have sufficient capacity to open the hydraulically-controlled choke line valve (if so equipped), close all rams plus the annular preventer, and retain a minimum of 200 psi above precharge on the closing manifold without the use of closing unit pumps. The fluid reservoir capacity will be double the usable fluid volume of the accumulator system capacity and the fluid level of the reservoir will be maintained at the manufacturer's recommendations.

The BOP system will have two (2) independent power sources to close the preventers. Nitrogen bottles (3 minimum) will be one (1) of these independent power sources and will maintain a charge equal to the manufacturer's specifications.

The accumulator precharge pressure test will be conducted prior to connecting the closing unit to the BOP stack and at least once every six (6) months thereafter. The accumulator pressure will be corrected if the measured precharge pressure is found to be above or below the maximum or minimum limits specified in the *Onshore Oil & Gas Order Number 2*.

A manual locking device (i.e. hand wheels) or automatic locking device will be installed on all systems of 2M or greater. A valve will be installed in the closing line as close as possible to the annular preventer to act as a locking device. This valve will be maintained in the open position and will be closed only when the power source for the accumulator is inoperative.

Remote controls shall be readily accessible to the driller. Remote controls for all 3M or greater systems will be capable of closing all preventers. Remote controls for 5M or greater systems will be capable of both opening and closing all preventers. Master controls will be at the accumulator and will be capable of opening and closing all preventers and the choke line valve (if so equipped).


**F. Miscellaneous Information:**

The Blow-Out Preventer and related pressure control equipment will be installed, tested and maintained in compliance with the specifications in and requirements of *Onshore Oil & Gas Order Number 2*. The choke manifold will be located outside the rig sub-structure. The hydraulic BOP closing unit will be located at least twenty-five (25) feet from the well head but readily accessible to the driller. Exact locations and configurations of the hydraulic BOP closing unit will depend upon the particular rig contracted to drill this hole.

A flare line will be installed after the choke manifold, extending 125 feet (minimum) from the center of the drill hole to a separate flare pit.

# BILL BARRETT CORPORATION


## TYPICAL 3,000 p.s.i. BLOWOUT PREVENTER

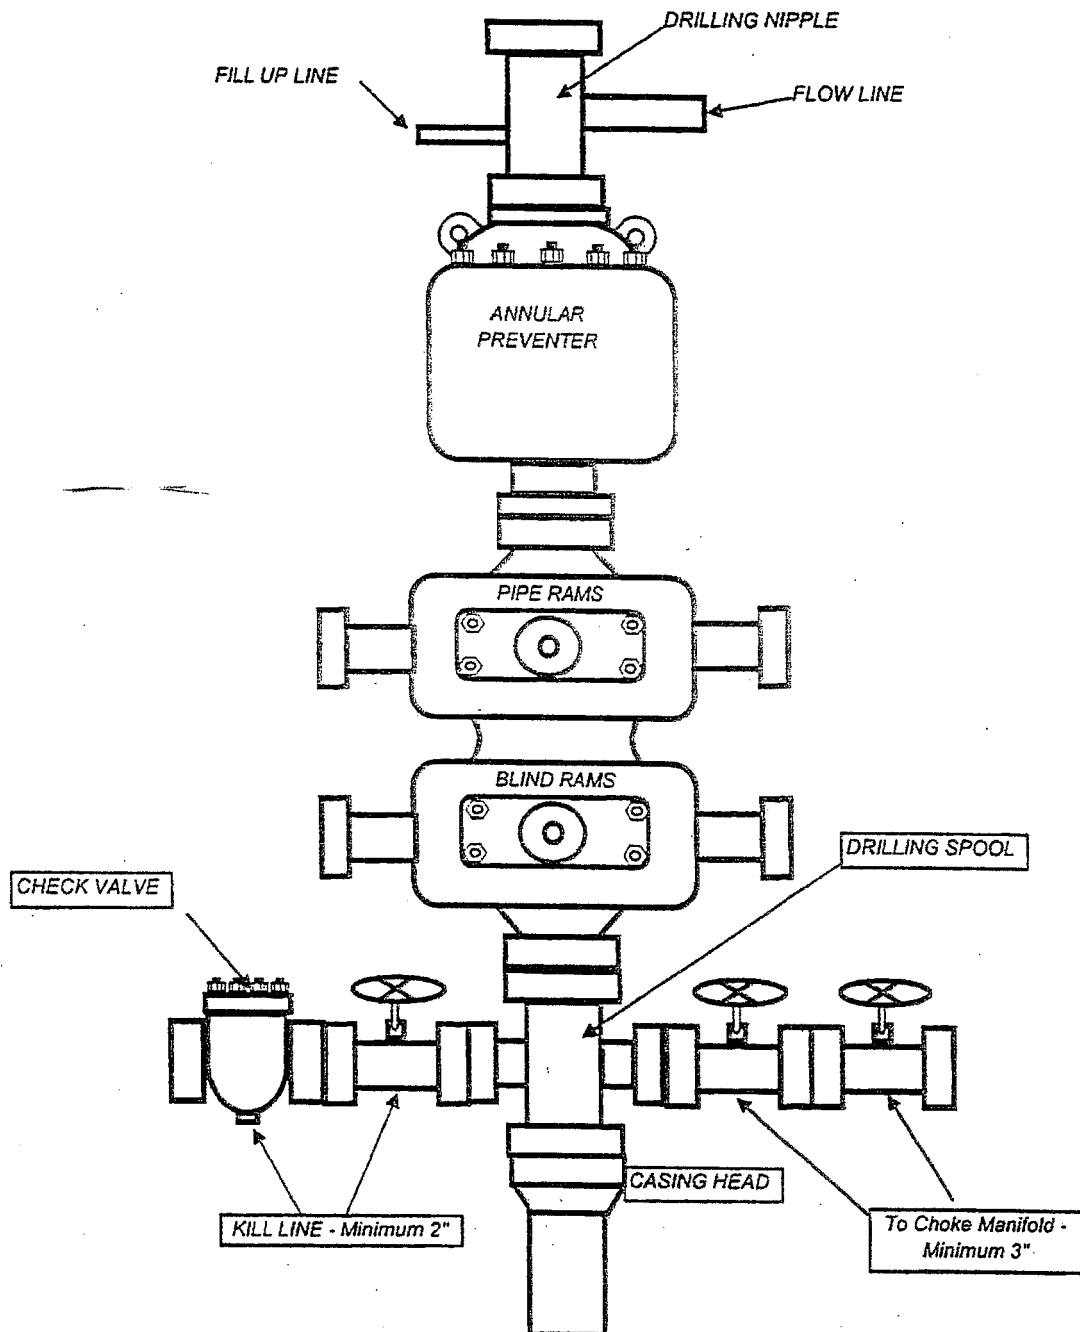



# BILL BARRETT CORPORATION

## TYPICAL 3,000 p.s.i. CHOKE MANIFOLD

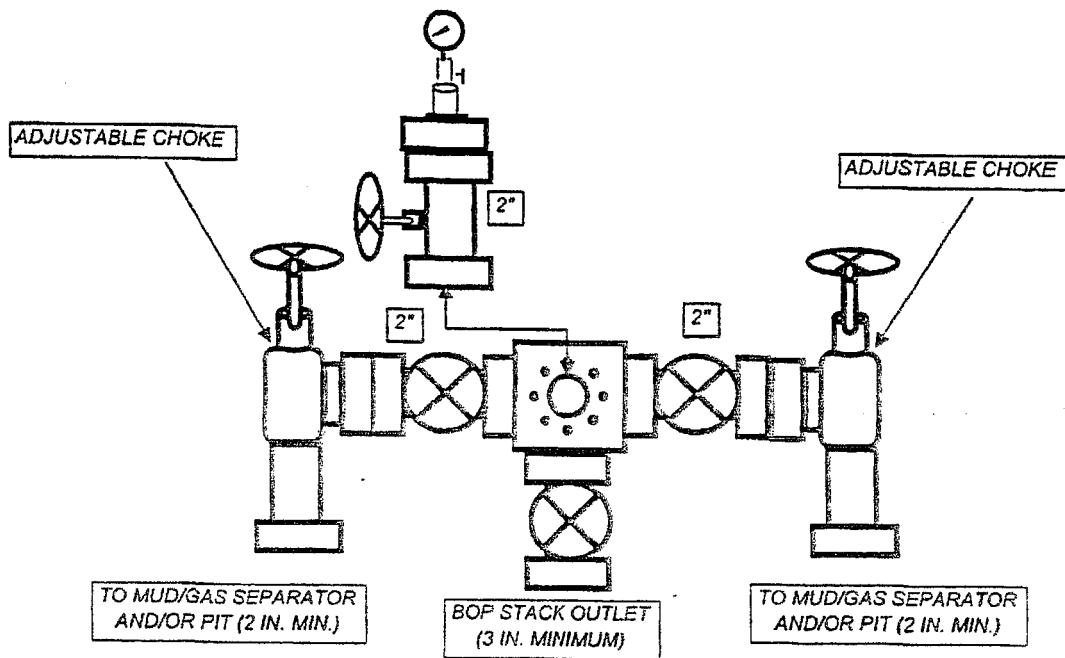

## SURFACE USE PLAN

BILL BARRETT CORPORATION

Prickly Pear Unit Federal #1-19-12-15

NENE, 465' FNL, 633' FEL, Sec. 19-T12S-R15E (Surface Hole)

Section 19, T12S-R15E

Carbon County, Utah

---

The onsite for this location was conducted on 10/26/2006.

The dirt contractor will be provided with an approved copy of the surface use plan of operations before initiating construction.

A. Existing Roads:

1. The proposed well site is located approximately 45 miles from Myton, Utah. Maps reflecting directions to the proposed well site are included (see Topographic maps A and B).
2. The use of roads under State and County Road Department maintenance is necessary to access the Prickly Pear Unit. However, an encroachment permit is not anticipated since no upgrades to the State or County road systems are proposed at this time.
3. All existing roads will be maintained and kept in good repair during all phases of operation.
4. Vehicle operators will obey posted speed restrictions and observe safe speeds commensurate with road and weather conditions.
5. Since no improvements are anticipated to the State, County or BLM access roads, no topsoil stripping will occur.
6. An off-lease federal right-of-way for the access road and utility corridor is not anticipated at this time since existing roads are being utilized into the Prickly Pear Unit area. All new construction will be within the Unit.

B. Planned Access Road

1. From the existing Prickly Pear road, an access of approximately 220' is proposed (see Topographic map B). A road design plan is not anticipated at this time.
2. The new access road will consist of an 18' travel surface within a 32' temporary disturbance area. The proposed access has been placed to minimize impact to the environment and natural drainage of the area.
3. BLM approval to construct this new access road is requested with this application.
4. A maximum grade of 10% will be maintained throughout the project with minimum cuts and fills, as necessary, to access the well.
5. The access road will be constructed using standard equipment and techniques. Bulldozers and/or road graders would first clear vegetation and topsoil from the

ROW. These materials may be windrowed for future redistribution during the reclamation process. The surface would be crowned to facilitate drainage to a borrow ditch on each side of the road designed to minimize erosion potential. Graveling or capping the roadbed may be performed as necessary to provide a well constructed, safe road. Following completion of the well, the road will be reduced to an 18-foot wide running surface and reclaimed according to the specifications of the appropriate agency or private land owner.

6. A turnout is not proposed.
7. 18" diameter culverts will be installed as necessary. Adequate drainage structures, where necessary, will be incorporated into the remainder of the road.
8. No surfacing material will come from Indian lands or off-lease Federal lands. BBC requests that any excess rock from construction of the pad be used for surfacing of the access road, if necessary. Any additional materials needs may come from an existing SITLA Materials Permit #334 in Section 16, T12S-R15E.
9. No gates or cattle guards are anticipated at this time.
10. Surface disturbance and vehicular travel will be limited to the approved location access road. Adequate signs will be posted, as necessary, to warn the public of project related traffic.
11. All access roads and surface disturbing activities will conform to the appropriate standard, no higher than necessary, to accommodate their intended function adequately as outlined in the Bureau of Land Management and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development, Fourth Edition – 2006.
12. The operator will be responsible for all maintenance of the access road including drainage structures. It is BBC's intent to maintain the newly constructed access road to this wellsite.

C. Location of Existing Wells:

1. Following is a list of wells with surface hole locations within a one-mile radius of the proposed well:

i. water wells	none
ii. injection wells	none
iii. disposal wells	none
iv. drilling wells	none
v. temp shut-in wells	none
vi. producing wells	nine
vii. abandoned wells	two
2. Topographic Map C may not include all wells noted in A. above if new wells have been drilled since the date of the plat. An additional map has been included indicating current locations.

D. Location of Production Facilities:

1. Some permanent structures/facilities may be shared between this proposed well and additional wells that may be drilled from this pad. Each well will have its own meter run and separator. Pending the evaluation of completion operations, additional water and/or oil tanks may be added if necessary.
2. All permanent above-ground structures will be painted a flat, non-reflective Olive Black to match the standard environmental colors. All facilities will be painted the designated color at the time of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) may be excluded.
3. Site security guidelines identified in 43 CFR 3162.7-5 and Onshore Oil and Gas Order No. 3 will be adhered to.
4. A gas meter run will be constructed and located on lease within 500 feet of the wellhead. Meter runs will be housed and/or fenced. All gas production and measurement shall comply with the provisions of 43 CFR 3162.7-3, Onshore Oil and Gas Order No. 5, and American Gas Association (AGA) Report No. 3. **Use of an electronic flow meter (EFM) for gas measurement purposes is requested with this application.**
5. A tank battery(s) will be constructed on this lease; it will be surrounded by a berm sufficient to contain the storage capacity of 1.5 times the single largest tank inside the berm. All loading lines and valves will be placed inside the berm surrounding the tank battery or will have a secondary containment vessel. All liquid hydrocarbon production and measurement shall conform to the provisions of 43 CFR 3162.7-2 and Onshore Oil and Gas Order No. 4 for the measurement of oil. BBC requests permission to install the necessary production/operation facilities with this application.
6. Any necessary pits will be properly fenced to prevent any wildlife and livestock entry.
7. All access roads will be maintained as necessary to prevent erosion and accommodate year-round traffic as practicable. The roads will be maintained in a safe, useable condition.
8. The site will require periodic maintenance to ensure that drainages are kept open and free of debris, ice and snow, and that surfaces are properly treated to reduce erosion, fugitive dust, and impacts to adjacent areas.
9. A gas pipeline (approximately 215' of up to 10" pipe) is associated with this application and is being applied for at this time. The proposed gas pipeline will leave the west end of the well pad and tie in to an existing surface-laid 12" pipeline.
10. The proposed steel gas pipeline will be buried, where soil conditions permit, within a 20' utility corridor immediately adjacent to the 32' disturbed area for the new access road road (see Topographic Map D).
11. As referred to in I. above, the line will not be buried in areas with bedrock at or near surface that would require blasting to loosen rock before excavation for burial of the

pipeline. A table of the actual pipeline corridor width required is noted below for the different scenarios. **BBC is requesting a 20' utility corridor but actual disturbance will be based on the applicable scenario.**

Surface-Laid:	20' utility corridor + 32' road corridor = 52' TOTAL
	Estimated disturbance for utility to be minimal, if any, within the 20' requested. Total disturbance would be 32'.
Buried:	20' utility corridor + 32' road corridor = 52' TOTAL
	Estimated disturbance for utility to include all 20' requested. Total disturbance would be 52'.

12. The determination to bury or surface lay the pipeline will be made by the Authorized Officer at the time of construction.
13. BBC intends on stringing the pipeline on the surface, welding many joints into long lengths, dragging the long lengths into position and then completing a final welding pass to join the long lengths together. The welded joints will either remain on the surface or will be placed within the trench, depending on the scenario. BBC intends on connecting the pipeline together utilizing conventional welding technology.

E. Location and Type of Water Supply:

1. Bill Barrett Corporation will use water consistent with approvals granted by the Utah State Engineer's Office under Application Number 90-1846 (T76109) which expires March 27, 2008 or an existing water well in Sec. 13, T12S-R14E granted by the Utah State Engineer's Office under Application Number 90-1844 (T75896) which expires September 5, 2007.

F. Source of Construction Material:

1. The use of materials will conform to 43 CFR 3610.2-3.
2. No construction materials will be removed from BLM.
3. If any additional gravel is required, it will be obtained from a State approved gravel pit. BBC also has in place Materials Permit #334 covering all of Section 16-T12S-R15E.

G. Methods of Handling Waste Disposal:

1. All wastes associated with this application will be contained and disposed of utilizing approved facilities.
2. Drill cuttings will be contained and buried on site.
3. The reserve pit will be located outboard of the location along the south side of the pad.
4. The reserve pit will be constructed so as not to leak, break or allow any discharge.
5. If necessary, the reserve pit will be lined with 12 mil minimum thickness plastic nylon reinforced liner material. The liner will overlay a felt-liner pad only if rock is

encountered during excavation. The pit liner will overlap the pit walls and be anchored with dirt and/or rocks to hold it in place. No trash, scrap pipe, etc., that could puncture the liner will be disposed of in the pit. Pit walls will be sloped no greater than 2:1. A minimum 2-foot freeboard will be maintained in the pit at all times during the drilling and completion operations.

6. The reserve pit has been located in cut material. Three sides of the reserve pit will be fenced before drilling starts. The fourth side will be fenced as soon as drilling is completed and shall remain until the pit is dry. After the reserve pit has dried, all areas not needed for production will be rehabilitated.
7. No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported or disposed of annually in association with the drilling, testing or completion of the well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities will be used, produced, stored, transported or disposed of in association with the drilling, testing or completion of the well.
8. Trash will be contained in a trash cage or roll-off container and hauled away to an approved disposal site as necessary but no later than at the completion of drilling operations. The contents of the trash container will be hauled off periodically to the approved Carbon or Uintah County Landfill.
9. Produced fluids from the well other than water will be produced into a test tank until such time as construction of production facilities is completed. Any spills of oil, gas, salt water or other produced fluids will be cleaned up and removed.
10. After initial clean-up and based on volumes, BBC will install a tank (maximum size 400 barrel capacity) to contain produced waste water. After first production, produced wastewater will be confined to a lined pit or storage tank for a period not to exceed ninety (90) days. Thereafter, produced water will be used in further drilling and completion activities, evaporated in the pit, or hauled to R & I Disposal, a State approved disposal facility.
11. Any salts and/or chemicals, which are an integral part of the drilling system, will be disposed of in the same manner as the drilling fluid.
12. Sanitary facilities will be on site at all times during operations. Sewage will be placed in a portable chemical toilet and the toilet replaced periodically utilizing a licensed contractor to transport by truck the portable chemical toilet so that its contents can be delivered to the Price or Vernal Wastewater Treatment Facility in accordance with state and county regulations.
13. Any liquid hydrocarbons produced during completion work will be contained in test tanks on the well location. The tanks will be removed from location at a later date.
14. A flare pit may be constructed a minimum of 110' from the wellhead and may be used during completion work. In the event a flare pit proves to be unworkable in this situation, a flare stack will be installed. BBC will flow back as much fluid and gas as possible into pressurized vessels, separating the fluid from the gas. The fluid will then be either returned to the reserve pit or placed into a tank. Gas will be then directed into the flare pit or the flare stack and a constant source of ignition will be on site. This should eliminate any fires in and around the reserve pit. Natural gas

will be directed to the pipeline as soon as pipeline gas quality standards are met. By eliminating condensate on the reserve pit and discharge of gas within the reserve pit, potential for damage to the pit liner will be minimized.

15. Any hydrocarbons floating on the surface of the reserve pit will be removed as soon as possible after drilling and completion operations are finished.
16. If hydrocarbons are present on the reserve pit and are not removed shortly after drilling or completion operations cease, the reserve pit will be flagged overhead or covered with wire or plastic mesh to protect migrating birds.

H. Ancillary Facilities:

1. Garbage containers and portable toilets are the only ancillary facilities proposed in this application

I. Well Site Layout:

1. The well will be properly identified in accordance with 43 CFR 3162.6.
2. The rig layout and cross section diagrams are enclosed (see Location Layout and Cross Sections Plats).
3. The pad and road designs are consistent with BLM specifications.
4. The pad has been staked at its maximum size of 431' x 175' with a reserve pit size of 190' x 100'.
5. All surface disturbing activities will be supervised by a qualified, responsible company representative who is aware of the terms and conditions of the APD and specifications in the approved plans.
6. All cut and fill slopes will be such that stability can be maintained for the life of the activity.
7. Diversion ditches will be constructed, if necessary, around the well site to prevent surface waters from entering the well site area.
8. The stockpiled topsoil (first 6 inches or maximum available) will be stored in a windrow on the uphill side of the location to prevent any possible contamination. All topsoil will be stockpiled for reclamation in such a way as to prevent soil loss and contamination.
9. Pits will remain fenced until site cleanup.
10. If air drilling occurs, the blooie line will be located at least 100 feet from the well head and will run from the wellhead directly to the pit.
11. Water application may be implemented if necessary to minimize the amount of fugitive dust.

J. Plan for Restoration of the Surface:

1. Site reclamation for a producing well(s) will be accomplished for portions of the site not required for the continued operation of the well(s) on this pad.
2. The operator will control noxious weeds along access road use authorizations, pipeline route authorizations, well sites or other applicable facilities by spraying or mechanical removal. A list of noxious weeds may be obtained from the BLM or the appropriate county extension office. On BLM administered land it is required that a Pesticide Use Proposal be submitted and approved prior to the application of herbicides, pesticides or possibly hazardous chemicals.
3. Upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1. The reserve pit will be allowed to dry prior to the commencement of backfilling work. No attempts will be made to backfill the reserve pit until the pit is free of standing water. Once the reserve pit is dry, the plastic nylon reinforced liner shall be torn and perforated before backfilling of the reserve pit. Rat and mouse holes will be filled and compacted from bottom to top immediately upon release of the drilling rig from location.
4. The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. Areas not used for production purposes will be backfilled and blended into the surrounding terrain, reseeded and erosion control measures installed. Erosion control measures will be adhered to after slope reduction. Mulching, erosion control measures and fertilization may be required to achieve acceptable stabilization. Back slopes and fore slopes will be reduced as practical and scarified with the contour. The reserved topsoil will be evenly distributed over the slopes and scarified along the contour. Slopes will be seeded with the BLM specified seed mix. Reclamation operations for the well pad are expected to require one week and will begin when the fluids in the reserve pit have evaporated. Seeding will take place either during the fall (prior to ground frost) or spring (after frost leaves the ground) months. Restoration of un-needed portions of the pad will commence as soon as practical after the installation of production facilities.
5. The cut and fill slopes and all other disturbed areas not needed for the production operation will be top-soiled and revegetated. Prior to reseeding, all disturbed areas will be scarified and left with a rough surface. The site will then be seeded and/or planted as prescribed by the BLM. The BLM recommended seed mix will be detailed within their approval documents. Topsoil salvaged from the drill site and stored for more than one year will be placed at the location indicated on the well site layout drawing and graded to a depth optimum to maintain topsoil viability, seeded with the BLM prescribed seed mixture and covered with mulch for protection from wind and water erosion and to discourage the invasion of weeds.
6. Salvaged topsoil from the road (if any) and the drill site will be evenly re-spread over cut and fill surfaces not actively used during the production phase. Upon final reclamation at the end of the project life, topsoil spread on these surfaces will be used for the overall reclamation effort.



K. Surface and Mineral Ownership:

1. Surface ownership – Federal under the management of the Bureau of Land Management – Price Field Office, 125 South 600 West, Price Utah 84078; (435) 636-3600.
2. Mineral ownership – Federal under the management of the Bureau of Land Management – Price Field Office, 125 South 600 West, Price Utah 84078; (435) 636-3600.

L. Other Information:


1. Montgomery Archaeological Consultants has conducted a Class III archeological survey. A copy of the report has been submitted under separate cover to the appropriate agencies by Montgomery as MOAC Report No. 06-486, dated September 28, 2006.
2. BBC will identify areas in our drilling program where fluids escaping the wellbore and exiting onto a hillside might occur. In those cases, BBC will be ready with cement and/ or fluid loss compounds (types of lost circulation fluids) to heal up vags and cracks. Upon individual evaluation of the proposed well sites, BBC may air drill the hole to surface casing depth if necessary.
3. A combustor may be installed at this location for control of associated condensate tank emissions. A combustor ranges from 24" to 48" wide and is approximately 10' tall. Combustor placement would be on existing disturbance and would not be closer than 100' to any tank or wellhead.

13. Operator's Representative and Certification:

<u>Title</u>	<u>Name</u>	<u>Office Phone</u>
Company Representative (Roosevelt)	Fred Goodrich	(435) 725-3515
Company Representative (Denver)	Tracey Fallang	(303) 312-8134

Certification:

I hereby certify that the statements made in this plan are, to the best of my knowledge and belief, true and correct; and that the work associated with the operations proposed herein will be performed by Bill Barrett Corporation and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

  
Tracey Fallang, Environmental/Regulatory Analyst

Date: April 18, 2007

# BILL BARRETT CORPORATION

PRICKLY PEAR UNIT FEDERAL #1-19-12-15 & #5-20D-12-15

LOCATED IN CARBON COUNTY, UTAH

SECTION 19, T12S, R15E, S.L.B.&M.

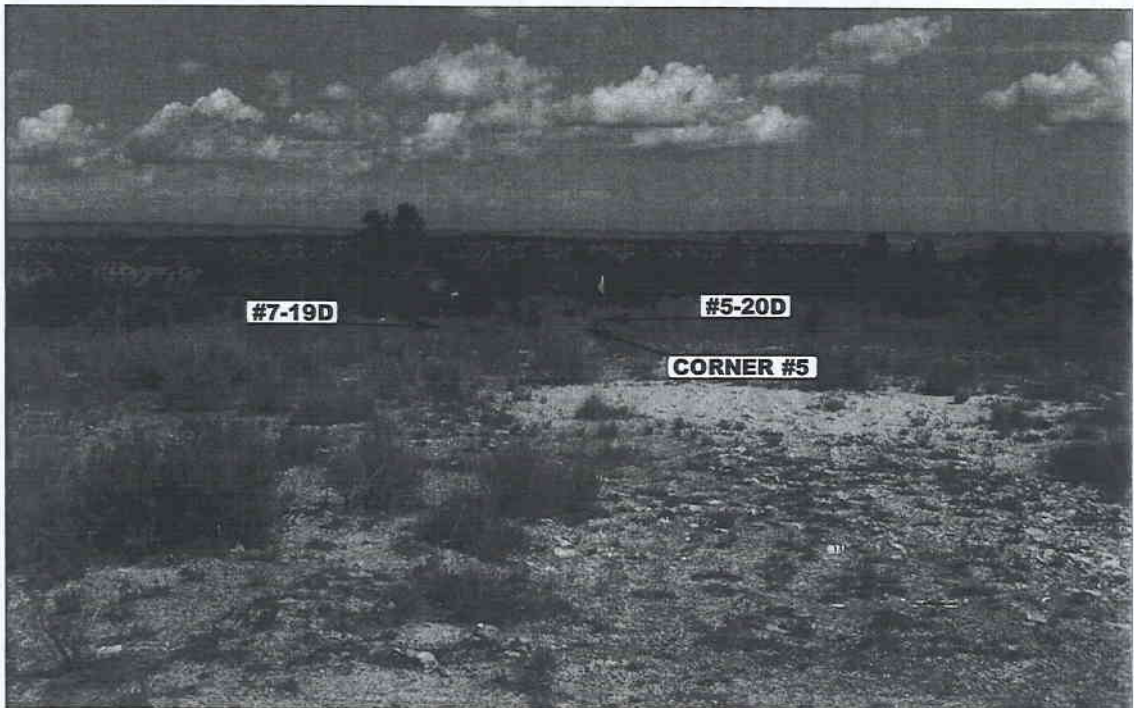


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHEASTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHEASTERLY



UELS

Uintah Engineering & Land Surveying

85 South 200 East Vernal, Utah 84078  
435-789-1017 uels@uelsinc.com

- Since 1964 -

LOCATION PHOTOS

08 28 06  
MONTH DAY YEAR

PHOTO

TAKEN BY: B.H.

DRAWN BY: C.P.

REVISED: 00-00-00



# BILL BARRETT CORPORATION

## TYPICAL CROSS SECTIONS FOR

PRICKLY PEAR UNIT FEDERAL #1-19-12-15


& #5-20D-12-15

SECTION 19, T12S, R15E, S.L.B.&M.

NE 1/4 NE 1/4

1" = 40'  
X-Section  
Scale  
1" = 100'

DATE: 08-29-06  
DRAWN BY: P.M.

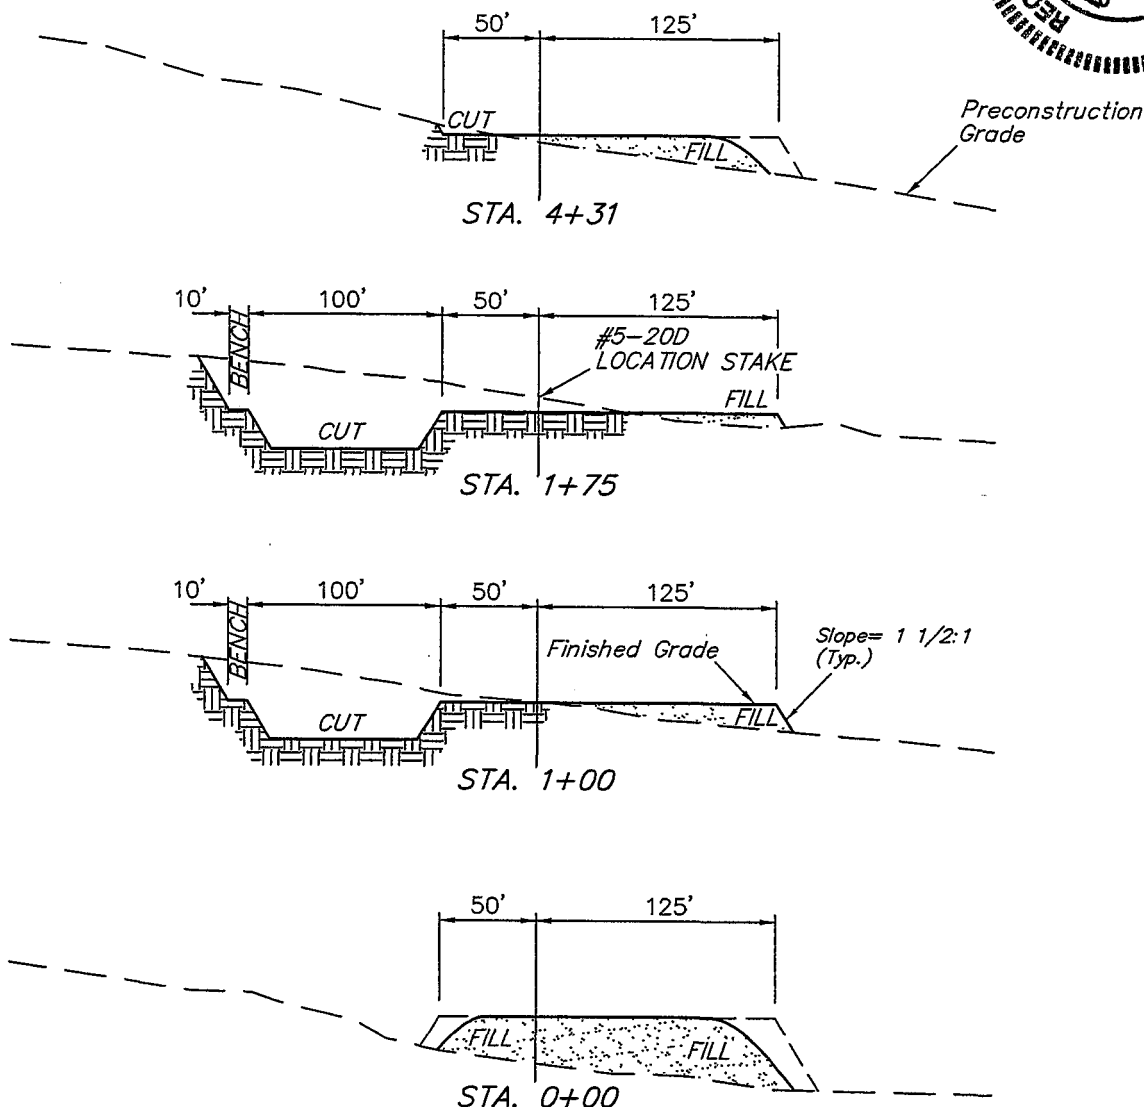

### NOTE:

Topsoil should not be Stripped Below Finished Grade on Substructure Area.

### \* NOTE:


FILL QUANTITY INCLUDES 5% FOR COMPACTION

### APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 2,180 Cu. Yds.
Remaining Location	= 12,680 Cu. Yds.
<b>TOTAL CUT</b>	<b>= 14,860 CU.YDS.</b>
<b>FILL</b>	<b>= 10,350 CU.YDS.</b>

EXCESS MATERIAL	= 4,510 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 4,510 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING  
85 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017

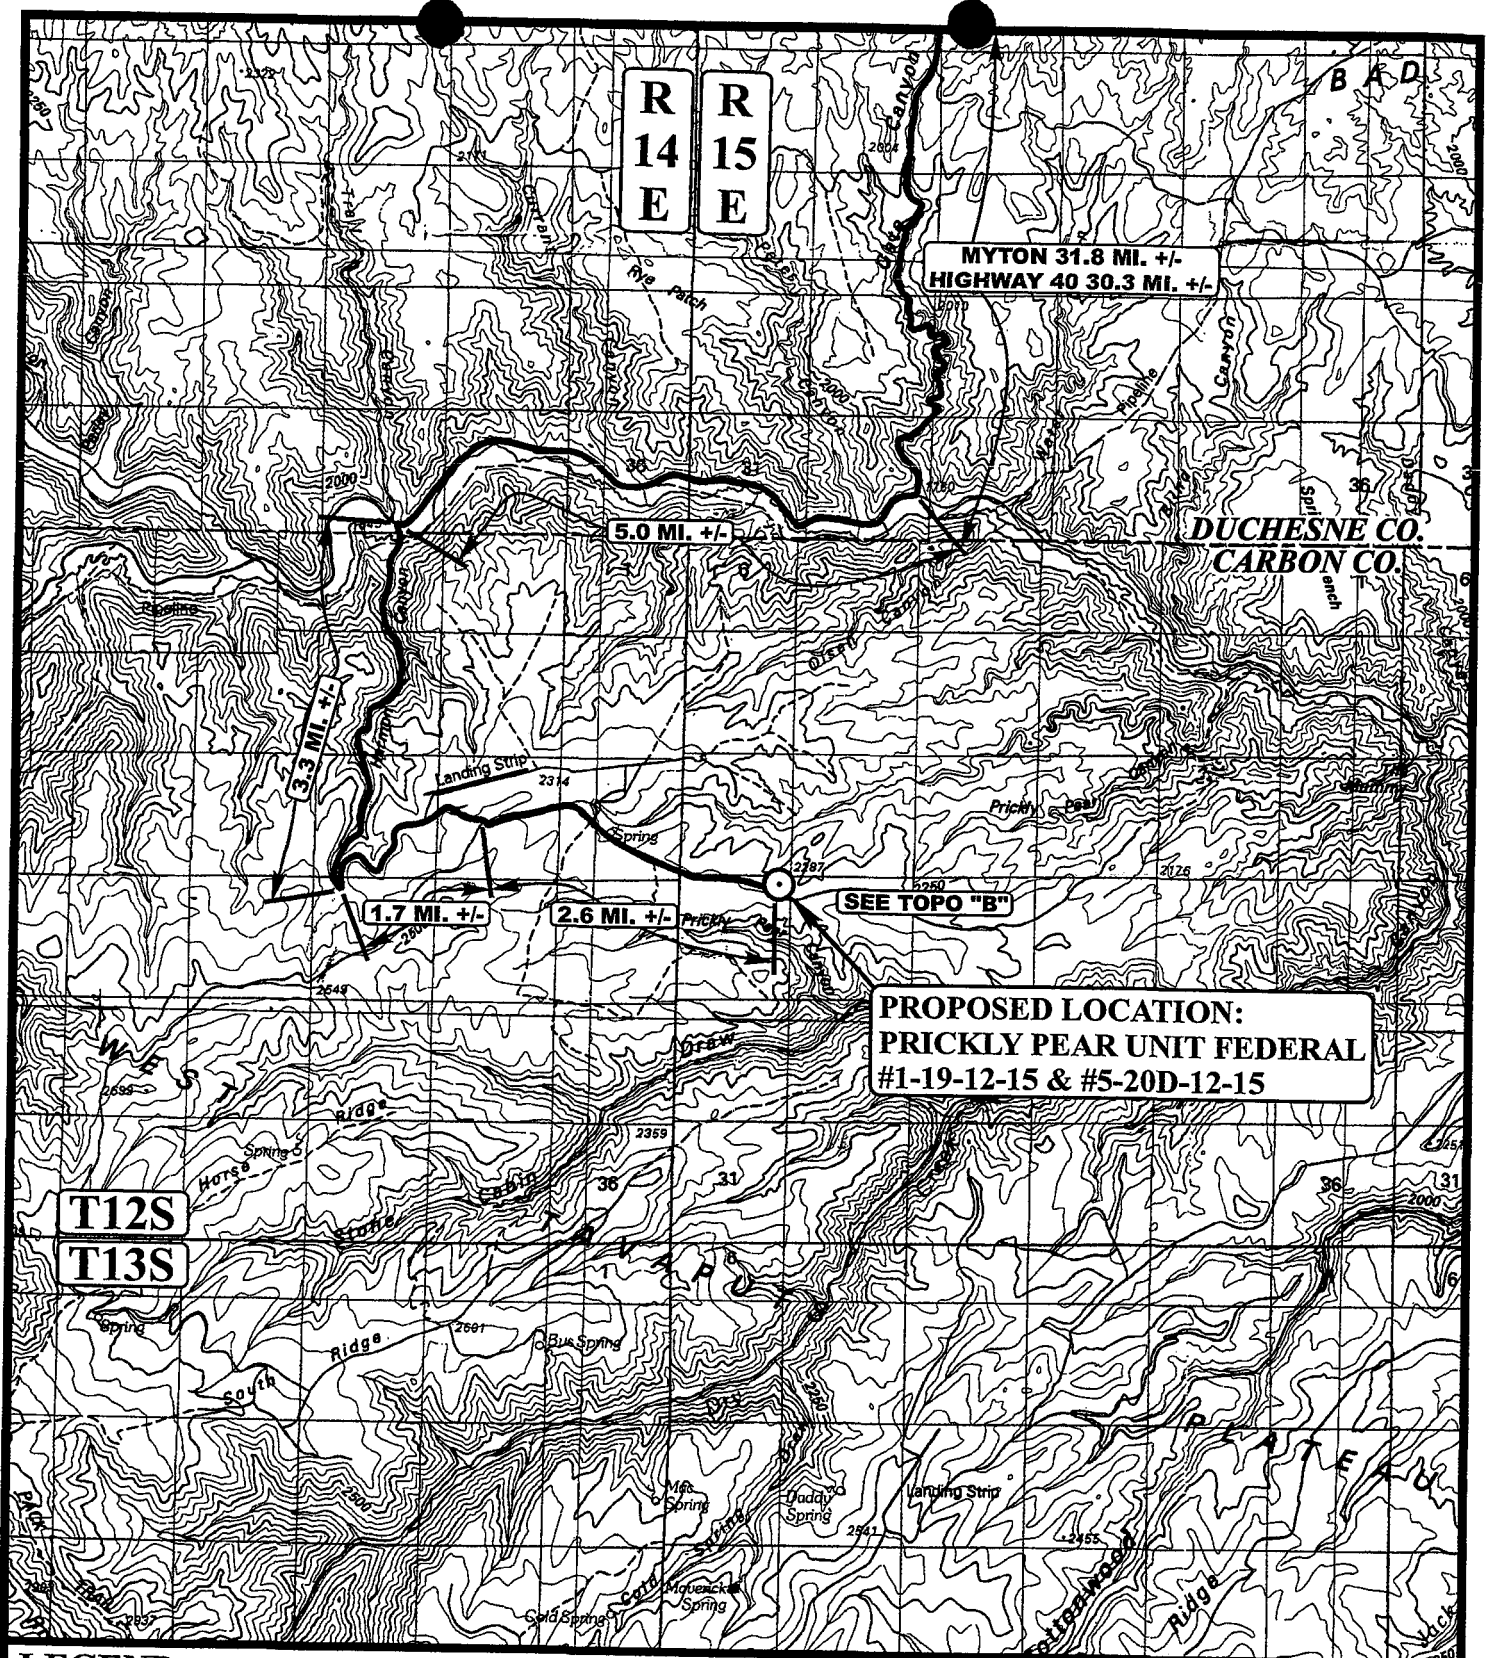

# **LEGEND:**

○ PROPOSED LOCATION



## **BILL BARRETT CORPORATION**

PRICKLY PEAR UNIT FEDERAL  
#1-19-12-15 & #5-20D-12-15  
SECTION 19, T12S, R15E, S.L.B.&M.  
NE 1/4 NE 1/4



Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813


TOPOGRAPHIC  
MAP

08 28 06  
MONTH DAY YEAR

SCALE: 1:100,000 DRAWN BY: C.P. REVISED: 00-00-00





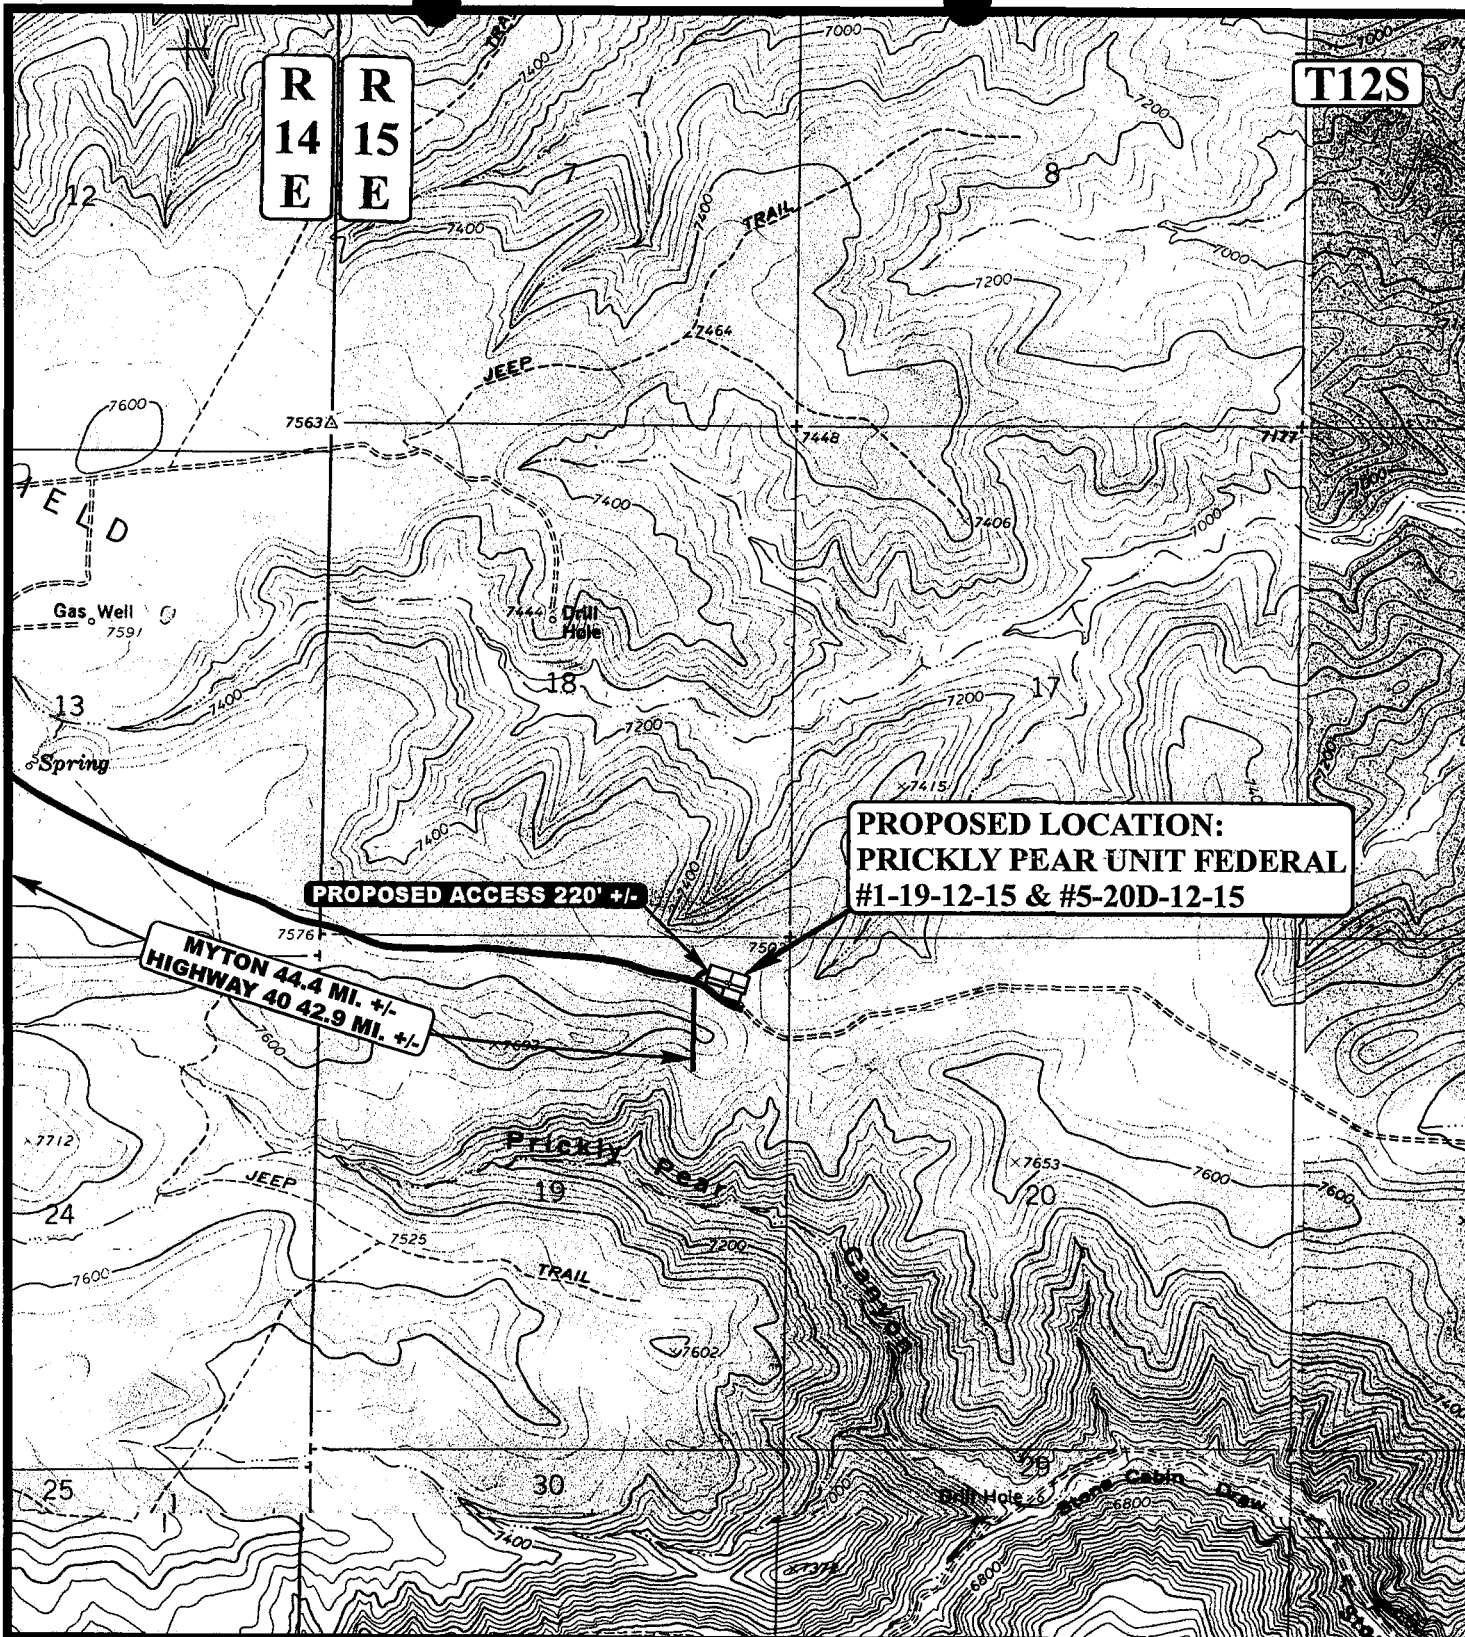

# **LEGEND:**

————— EXISTING ROAD  
 - - - - - PROPOSED ACCESS ROAD

## **BILL BARRETT CORPORATION**

PRICKLY PEAR UNIT FEDERAL  
 #1-19-12-15 & #5-20D-12-15  
 SECTION 19, T12S, R15E, S.L.B.&M.  
 NE 1/4 NE 1/4



**Uintah Engineering & Land Surveying**  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813




**TOPOGRAPHIC  
 MAP**

**08 28 06**  
 MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00



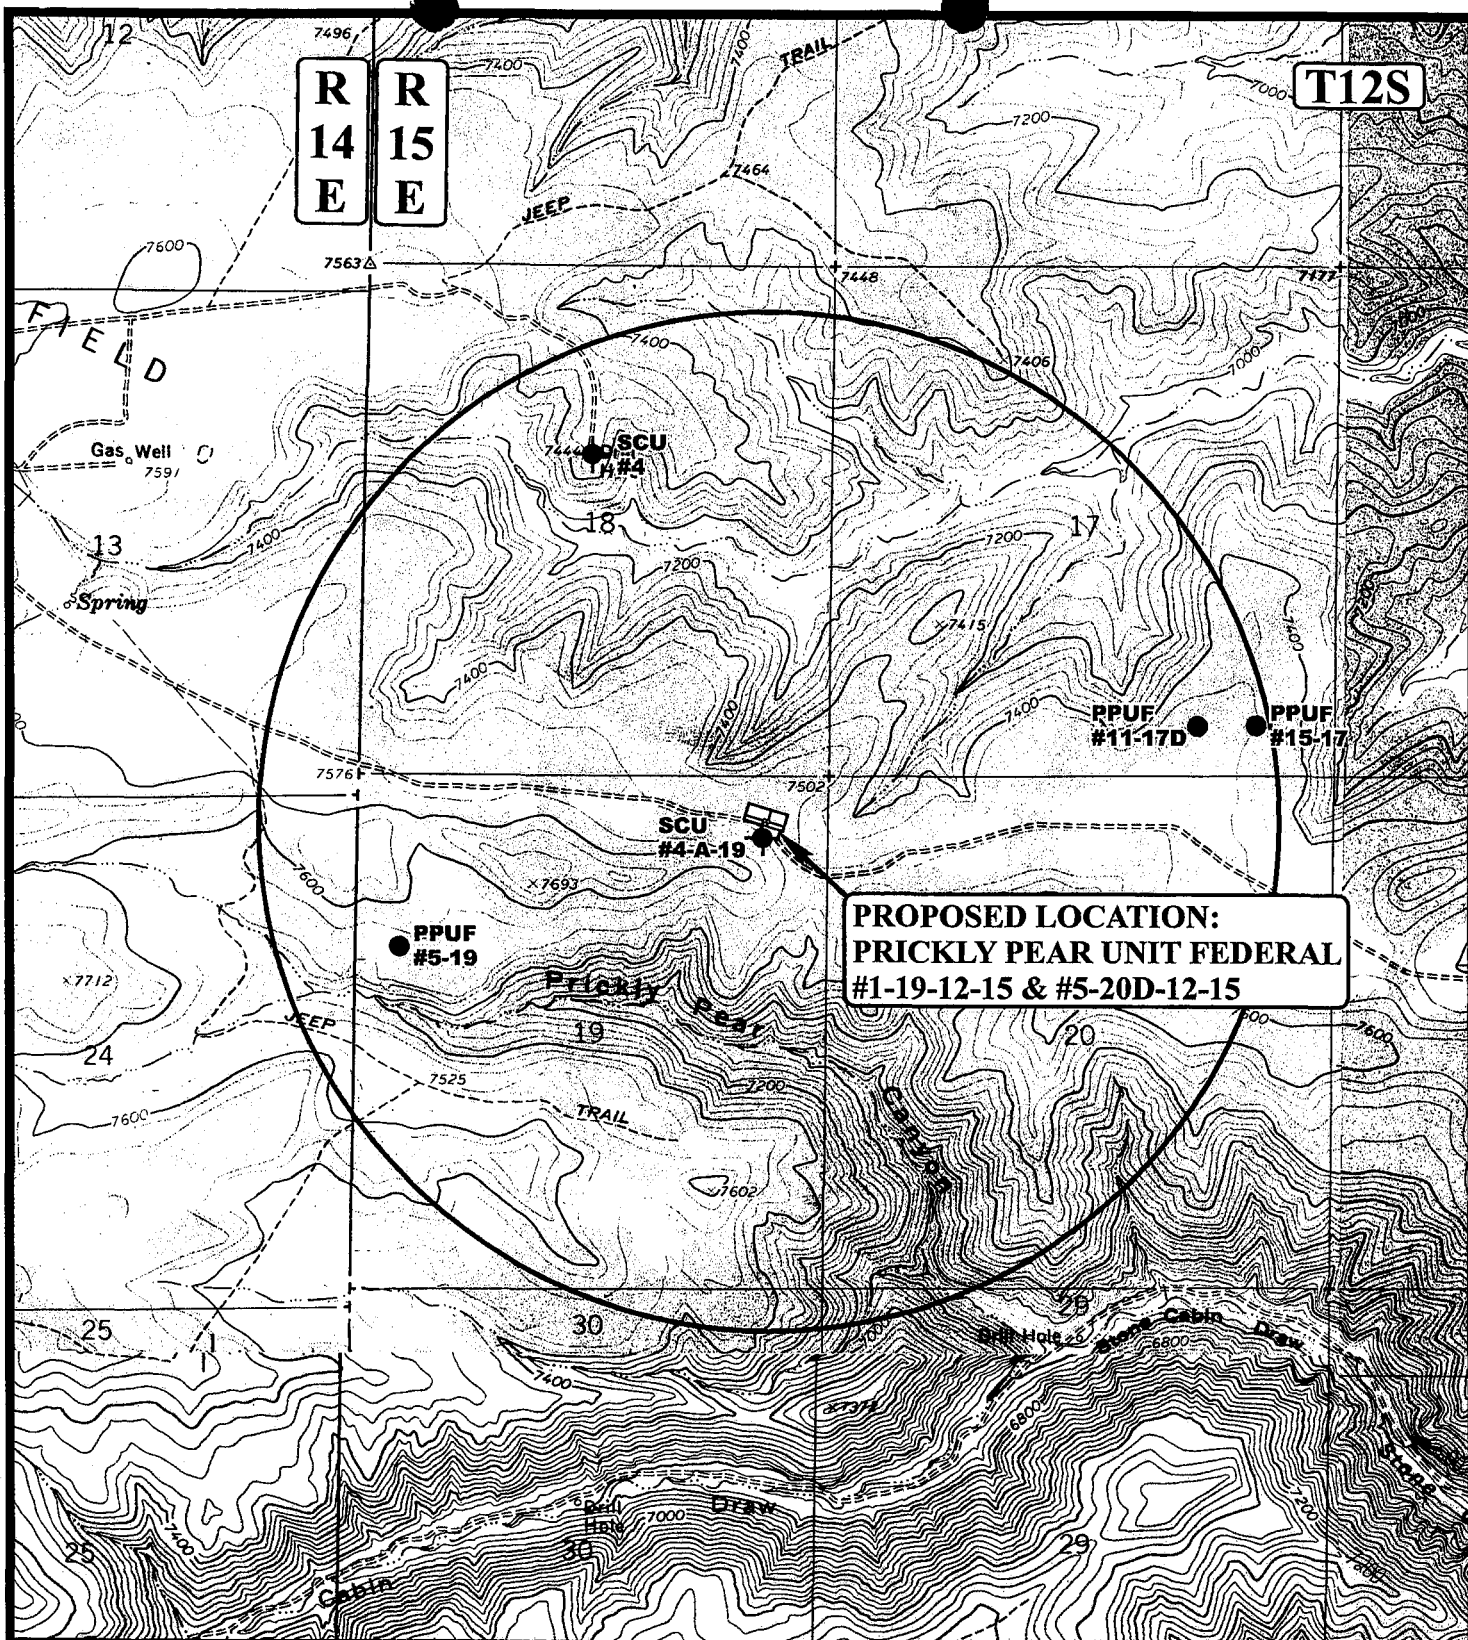

# LEGEND:

- |                   |                         |
|-------------------|-------------------------|
| ⊗ DISPOSAL WELLS  | ⊗ WATER WELLS           |
| ● PRODUCING WELLS | ● ABANDONED WELLS       |
| ● SHUT IN WELLS   | ● TEMPORARILY ABANDONED |

## BILL BARRETT CORPORATION

PRICKLY PEAR UNIT FEDERAL  
 #1-19-12-15 & #5-20D-12-15  
 SECTION 19, T12S, R15E, S.L.B.&M.  
 NE 1/4 NE 1/4



Uintah Engineering & Land Surveying  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813




TOPOGRAPHIC  
 MAP

08	28	06
MONTH	DAY	YEAR

SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00




Addendum to Topo C

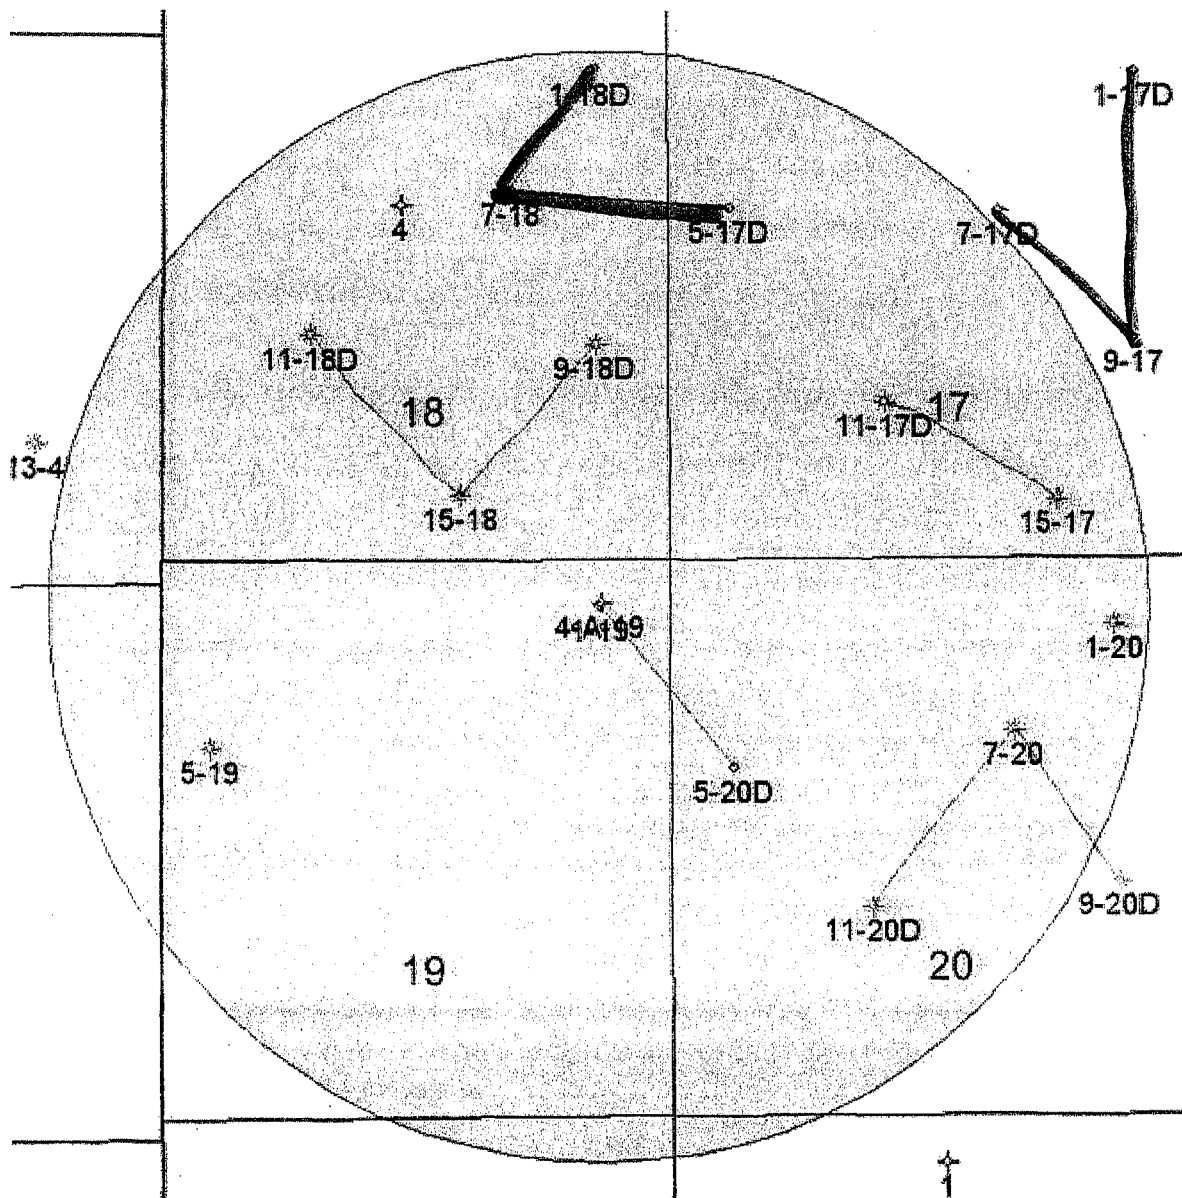

 = Proposed locations



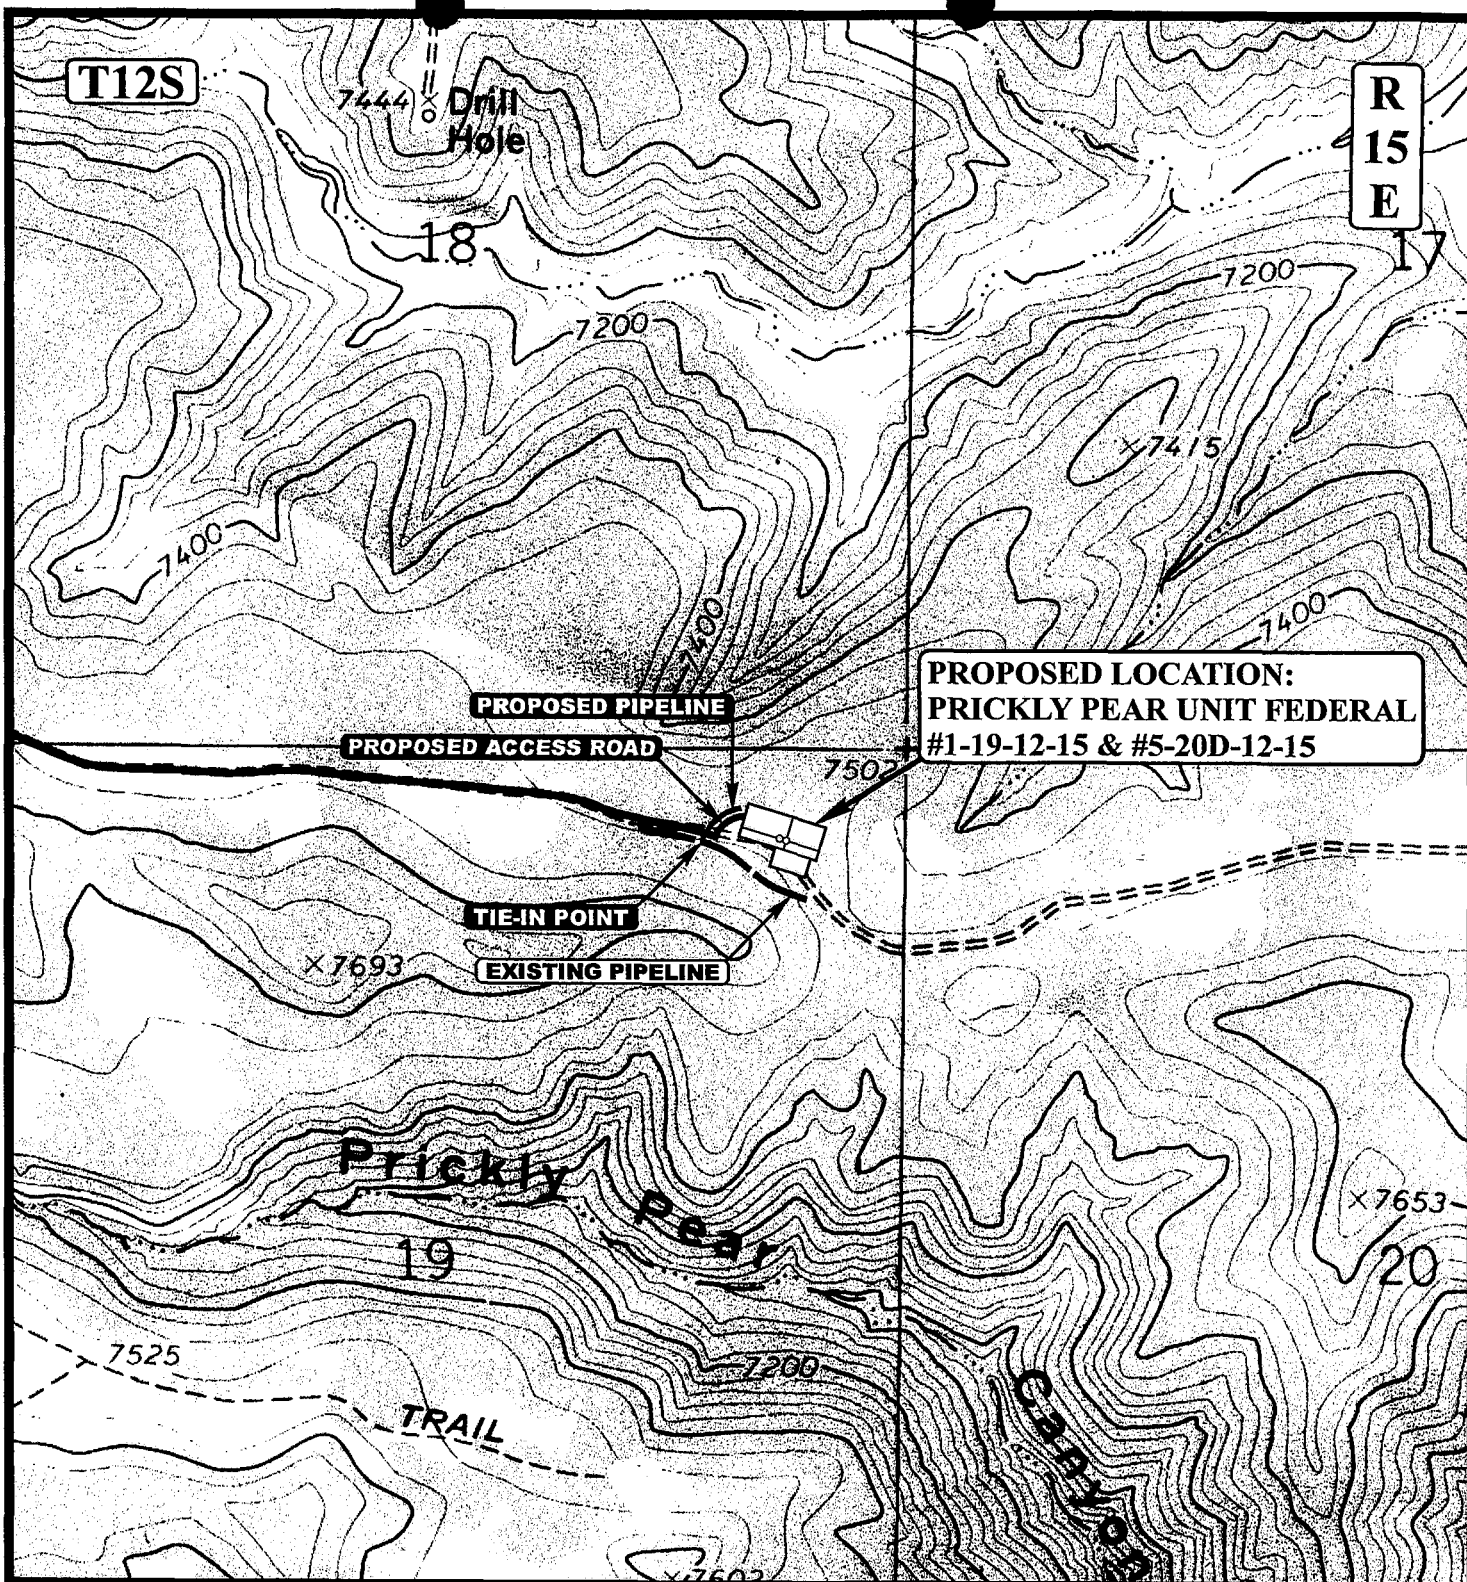

APPROXIMATE TOTAL PIPELINE DISTANCE = 215' +/-

# LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- PROPOSED PIPELINE

## BILL BARRETT CORPORATION

PRICKLY PEAR UNIT FEDERAL  
#1-19-12-15 & #5-20D-12-15  
SECTION 19, T12S, R15E, S.L.B.&M.  
NE 1/4 NE 1/4



Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813



TOPOGRAPHIC  
MAP

08 28 06  
MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: C.P. REVISED: 00-00-00



# Facility Layout



**BILL BARRETT CORPORATION**

LOCATION LAYOUT FOR

PRICKLY PEAR UNIT FEDERAL #1-19-12-15  
& #5-20D-12-15  
SECTION 19, T12S, R15E, S.L.B.&M.  
NE 1/4 NE 1/4

SCALE: 1" = 60'  
DATE: 08-29-06  
DRAWN BY: P.M.

**NOTE:**  
Flare Pit is to  
be located a min.  
of 100' from the  
Well Head.

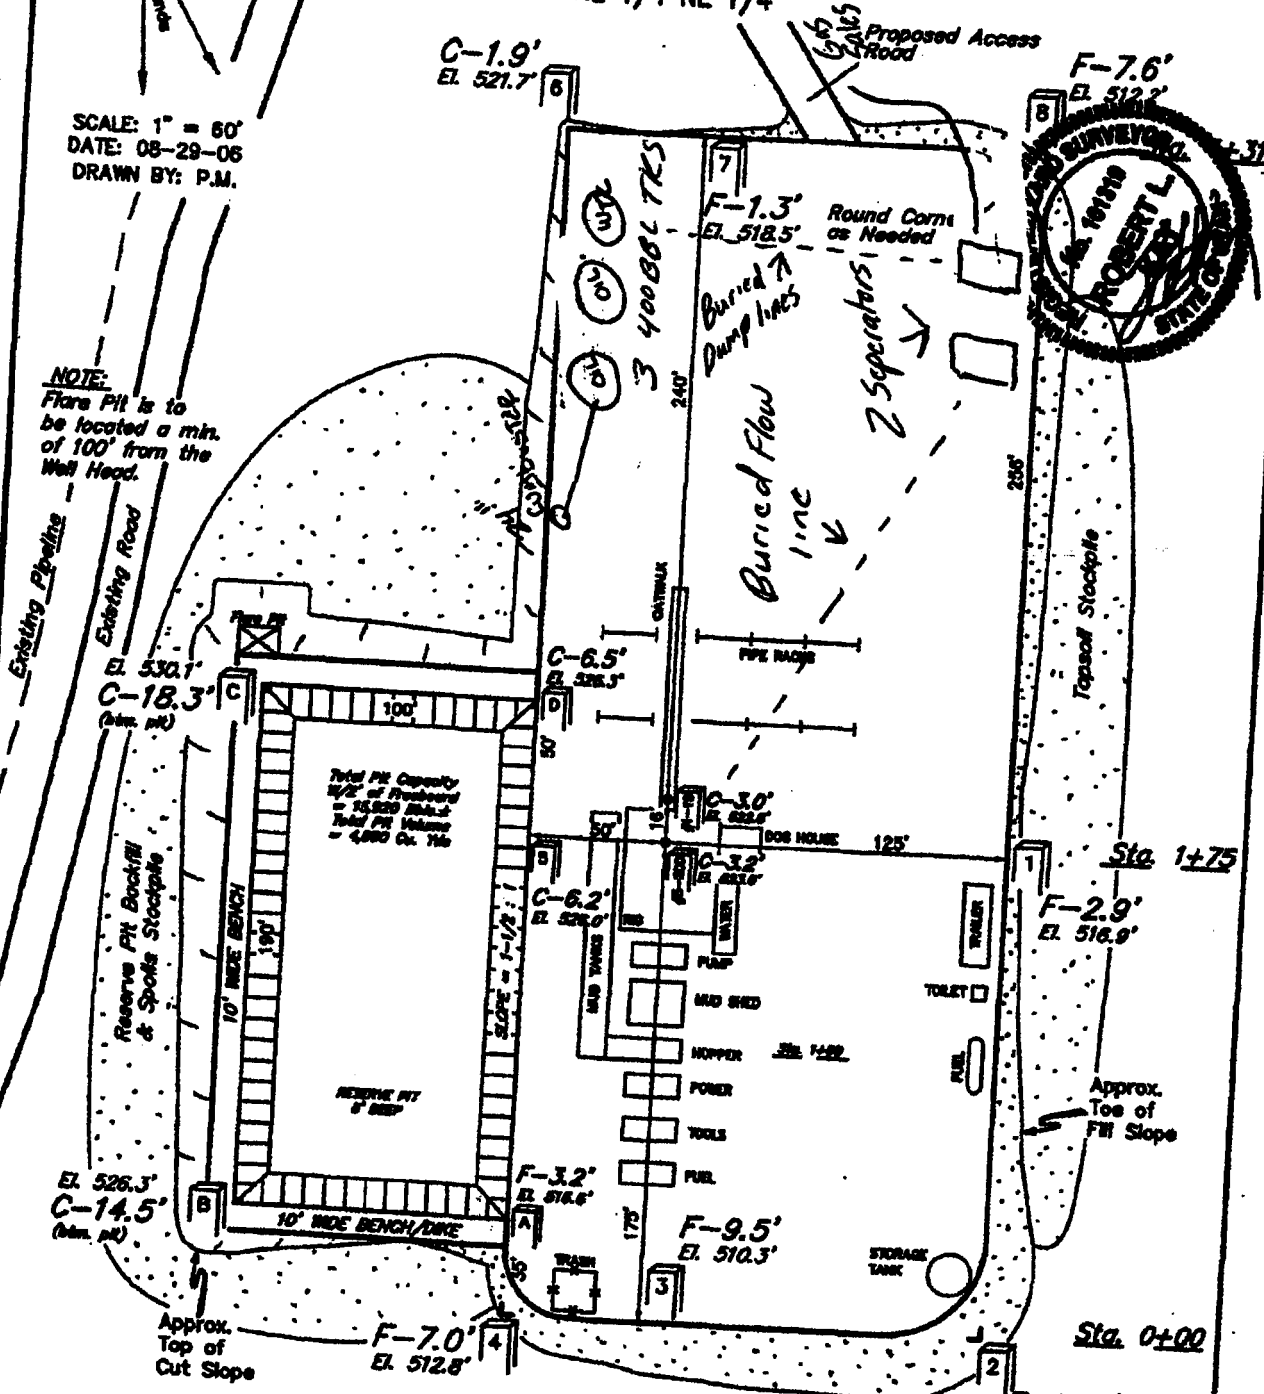

Elev. Ungraded Ground At #5-20D Loc. Stake = 7523.0'  
FINISHED GRADE ELEV. AT #5-20D LOC. STAKE = 7519.8'

**UINTAH ENGINEERING & LAND SURVEYING**  
85 So. 200 East • Farmval, Utah 84078 • (435) 786-1017

**WORKSHEET**  
**APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 04/20/2007

API NO. ASSIGNED: 43-007-31286

WELL NAME: PPU FED 1-19-12-15

OPERATOR: BILL BARRETT CORP ( N2165 )

PHONE NUMBER: 303-312-8134

CONTACT: TRACEY FALLANG

PROPOSED LOCATION:

NENE 19 120S 150E

SURFACE: 0465 FNL 0633 FEL

BOTTOM: 0465 FNL 0633 FEL

COUNTY: CARBON

LATITUDE: 39.76518 LONGITUDE: -110.2714

UTM SURF EASTINGS: 562407 NORTHINGS: 4401740

FIELD NAME: UNDESIGNATED ( 2 )

INSPECT LOCATN BY: / /

Tech Review	Initials	Date
-------------	----------	------

Engineering		
-------------	--	--

Geology		
---------	--	--

Surface		
---------	--	--

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-73669

SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: PRRV

COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

☒ Plat  
☒ Bond: Fed[1] Ind[] Sta[] Fee[]  
(No. WYB000040 )  
☒ Potash (Y/N)  
☒ Oil Shale 190-5 (B) or 190-3 or 190-13  
☒ Water Permit  
(No. 90-1846 )  
☒ RDCC Review (Y/N)  
(Date: )  
☒ Fee Surf Agreement (Y/N)  
☒ Intent to Commingle (Y/N)

LOCATION AND SITING:

\_\_\_ R649-2-3.

Unit: PRICKLY PEAR *nl*

\_\_\_ R649-3-2. General

Siting: 460 From Qtr/Qtr & 920' Between Wells

\_\_\_ R649-3-3. Exception

☒ Drilling Unit

Board Cause No: 256-1

Eff Date: 12-16-04

Siting: Suspend / Amend / Siting

\_\_\_ R649-3-11. Directional Drill

COMMENTS:

STIPULATIONS:

*1-Receipt Approved*





**State of Utah**

**Department of  
Natural Resources**

MICHAEL R. STYLER  
*Executive Director*

**Division of  
Oil, Gas & Mining**

JOHN R. BAZA  
*Division Director*

JON M. HUNTSMAN, JR.  
*Governor*

GARY R. HERBERT  
*Lieutenant Governor*

April 26, 2007

Bill Barrett Corporation  
1099 18th St., Ste. 2300  
Denver, CO 80202

Re: Prickly Pear Unit Federal 1-19-12-15 Well, 465' FNL, 633' FEL, NE NE,  
Sec. 19, T. 12 South, R. 15 East, Carbon County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-007-31286.

Sincerely,

Gil Hunt  
Associate Director

pab  
Enclosures

cc: Carbon County Assessor  
Bureau of Land Management, Moab Office

Operator: Bill Barrett Corporation  
Well Name & Number Prickly Pear Unit Federal 1-19-12-15  
API Number: 43-007-31286  
Lease: UTU-73669

Location: NE NE                      Sec. 19                      T. 12 South                      R. 15 East

### Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division with 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281 office  
(801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

**CONFIDENTIAL**  
UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**CONFIDENTIAL**

**COPY**

FORM APPROVED  
OMB No. 1004-0137  
Expires: March 31, 2007

**SUNDRY NOTICES AND REPORTS ON WELLS**

**Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.**

**SUBMIT IN TRIPLICATE- Other instructions on reverse side.**

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. UTU-73669
2. Name of Operator BILL BARRETT CORPORATION		6. If Indian, Allottee or Tribe Name n/a
3a. Address 1099 18th Street Suite 2300 Denver CO 80202	3b. Phone No. (include area code) 303 312-8134	7. If Unit or CA/Agreement, Name and/or No. Prickly Pear Unit/UTU-079487
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) NENE, 465' FNL, 633' FEL Sec. 19, T12S-R15E		8. Well Name and No. Prickly Pear Unit Fed 1-19-12-15
		9. API Well No. 43-007-31206 86
		10. Field and Pool, or Exploratory Area Nine Mile/Wasatch-Mesaverde
		11. County or Parish, State Carbon County, Utah

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Surface Hole Loc
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Move
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomple horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomple in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

**THIS SUNDRY IS BEING SUBMITTED AS NOTIFICATION THAT THE SURFACE HOLE LOCATION ON THIS WELL HAS CHANGED TO THE FOLLOWING:**

**NEW FOOTAGE: 470' FNL, 618' FEL**

**NO CHANGES TO PAD DIMENSIONS WERE MADE AND A COPY OF THE REVISED PLAT IS ENCLOSED.**

Approved by the  
Utah Division of  
Oil, Gas and Mining

**RECEIVED**

**JUN 25 2007**

**DIV. OF OIL, GAS & MINING**

Date: 06-26-07  
By: [Signature]

6-29-07  
RM

14. I hereby certify that the foregoing is true and correct Name (Printed/Typed) Tracey Fallang		Title Environmental/Regulatory Analyst
Signature [Signature]	Date 06/18/2007	
<b>THIS SPACE FOR FEDERAL OR STATE OFFICE USE</b>		
Approved by Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Title	Date
	Office	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.





# BILL BARRETT CORPORATION

PRICKLY PEAR UNIT FEDERAL #1-19-12-15 & #7-19D-12-15  
 LOCATED IN CARBON COUNTY, UTAH  
 SECTION 19, T12S, R15E, S.L.B.&M.



PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHEASTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHEASTERLY



- Since 1964 -


**UELS** Uintah Engineering & Land Surveying  
 85 South 200 East Vernal, Utah 84078  
 435-789-1017 uels@uelsinc.com

LOCATION PHOTOS		08	28	06	PHOTO
		MONTH	DAY	YEAR	
TAKEN BY: B.H.	DRAWN BY: C.P.	REV: 05-24-07 B.C.			

# BILL BARRETT CORPORATION

## LOCATION LAYOUT FOR

PRICKLY PEAR UNIT FEDERAL #1-19-12-15  
& #7-19D-12-15  
SECTION 19, T12S, R15E, S.L.B.&M.  
NE 1/4 NE 1/4



SCALE: 1" = 60'  
DATE: 08-29-06  
DRAWN BY: P.M.  
REVISED: 05-31-07

**NOTE:**  
Flare Pit is to  
be located a min.  
of 100' from the  
Well Head.

Existing Pipeline

Existing Road

CABIN #2

Reserve Pit Backfill  
& Spoils Stockpile

El. 526.3'  
C-14.5'  
(btm. pit)

Approx.  
Top of  
Cut Slope

C-10.8'  
El. 530.6'

C-6.3'  
El. 526.1'

5170.5'18"W 172.74'

52220'24"W 173.38'

Total Pit Capacity  
W/2' of Freeboard  
= 15,920 Bbls.±  
Total Pit Volume  
= 4,680 Cu. Yds

RESERVE PIT  
8' DEEP

10' WIDE BENCH/DIKE

F-7.0'  
El. 512.8'

F-3.2'  
El. 516.6'

F-9.5'  
El. 510.3'

F-7.6'  
El. 512.2'

F-1.3'  
El. 518.5'  
Round Corners  
as Needed

C-6.5'  
El. 526.3'

C-3.0'  
El. 522.8'

C-3.2'  
El. 523.0'

F-2.9'  
El. 516.9'

F-14.7'  
El. 505.1'

Proposed Access  
Road

Sta. 4+31



Topsoil Stockpile

Sta. 1+75

Approx.  
Toe of  
Fill Slope

Sta. 0+00

Elev. Ungraded Ground At #1-19 Loc. Stake = 7523.0'  
FINISHED GRADE ELEV. AT #1-19 LOC. STAKE = 7519.8'

UINTAH ENGINEERING & LAND SURVEYING  
85 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017


# BILL BARRETT CORPORATION

## TYPICAL CROSS SECTIONS FOR


PRICKLY PEAR UNIT FEDERAL #1-19-12-15  
& #7-19D-12-15

SECTION 19, T12S, R15E, S.L.B.&M.

NE 1/4 NE 1/4



DATE: 08-29-06  
DRAWN BY: P.M.  
REVISED: 05-31-07

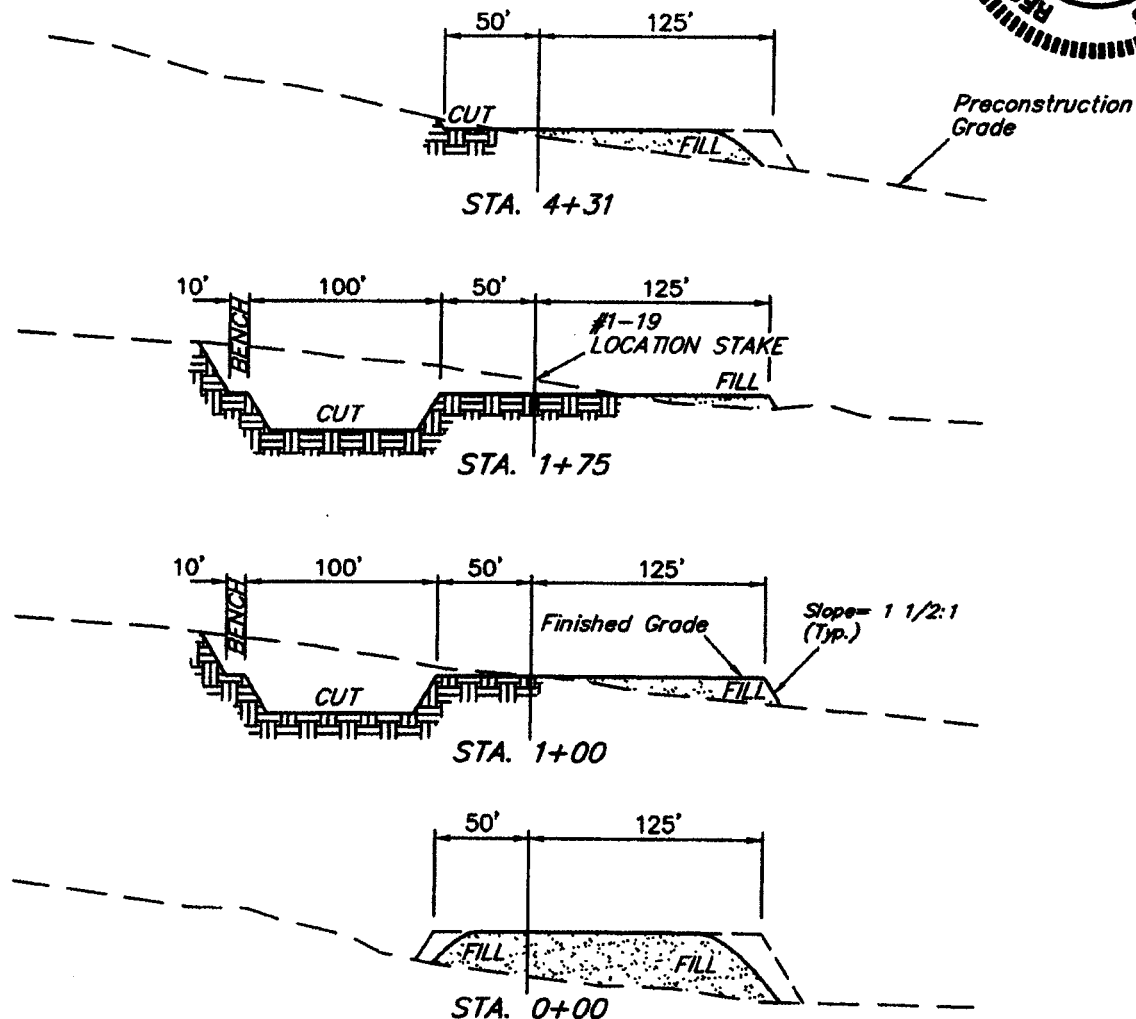

### APPROXIMATE ACREAGES

WELL SITE DISTURBANCE =  $\pm 3.369$  ACRES

ACCESS ROAD DISTURBANCE =  $\pm 0.152$  ACRES

PIPELINE DISTURBANCE =  $\pm 0.148$  ACRES

TOTAL =  $\pm 3.669$  ACRES

### NOTE:

Topsoil should not be Stripped Below Finished Grade on Substructure Area.

### \* NOTE:

FILL QUANTITY INCLUDES 5% FOR COMPACTION

### APPROXIMATE YARDAGES

#### CUT

(6") Topsoil Stripping = 2,180 Cu. Yds.  
Remaining Location = 12,680 Cu. Yds.

TOTAL CUT = 14,860 CU.YDS.


FILL = 10,350 CU.YDS.

EXCESS MATERIAL = 4,510 Cu. Yds.

Topsoil & Pit Backfill = 4,510 Cu. Yds.  
(1/2 Pit Vol.)

EXCESS UNBALANCE = 0 Cu. Yds.  
(After Interim Rehabilitation)

UINTAH ENGINEERING & LAND SURVEYING  
85 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017

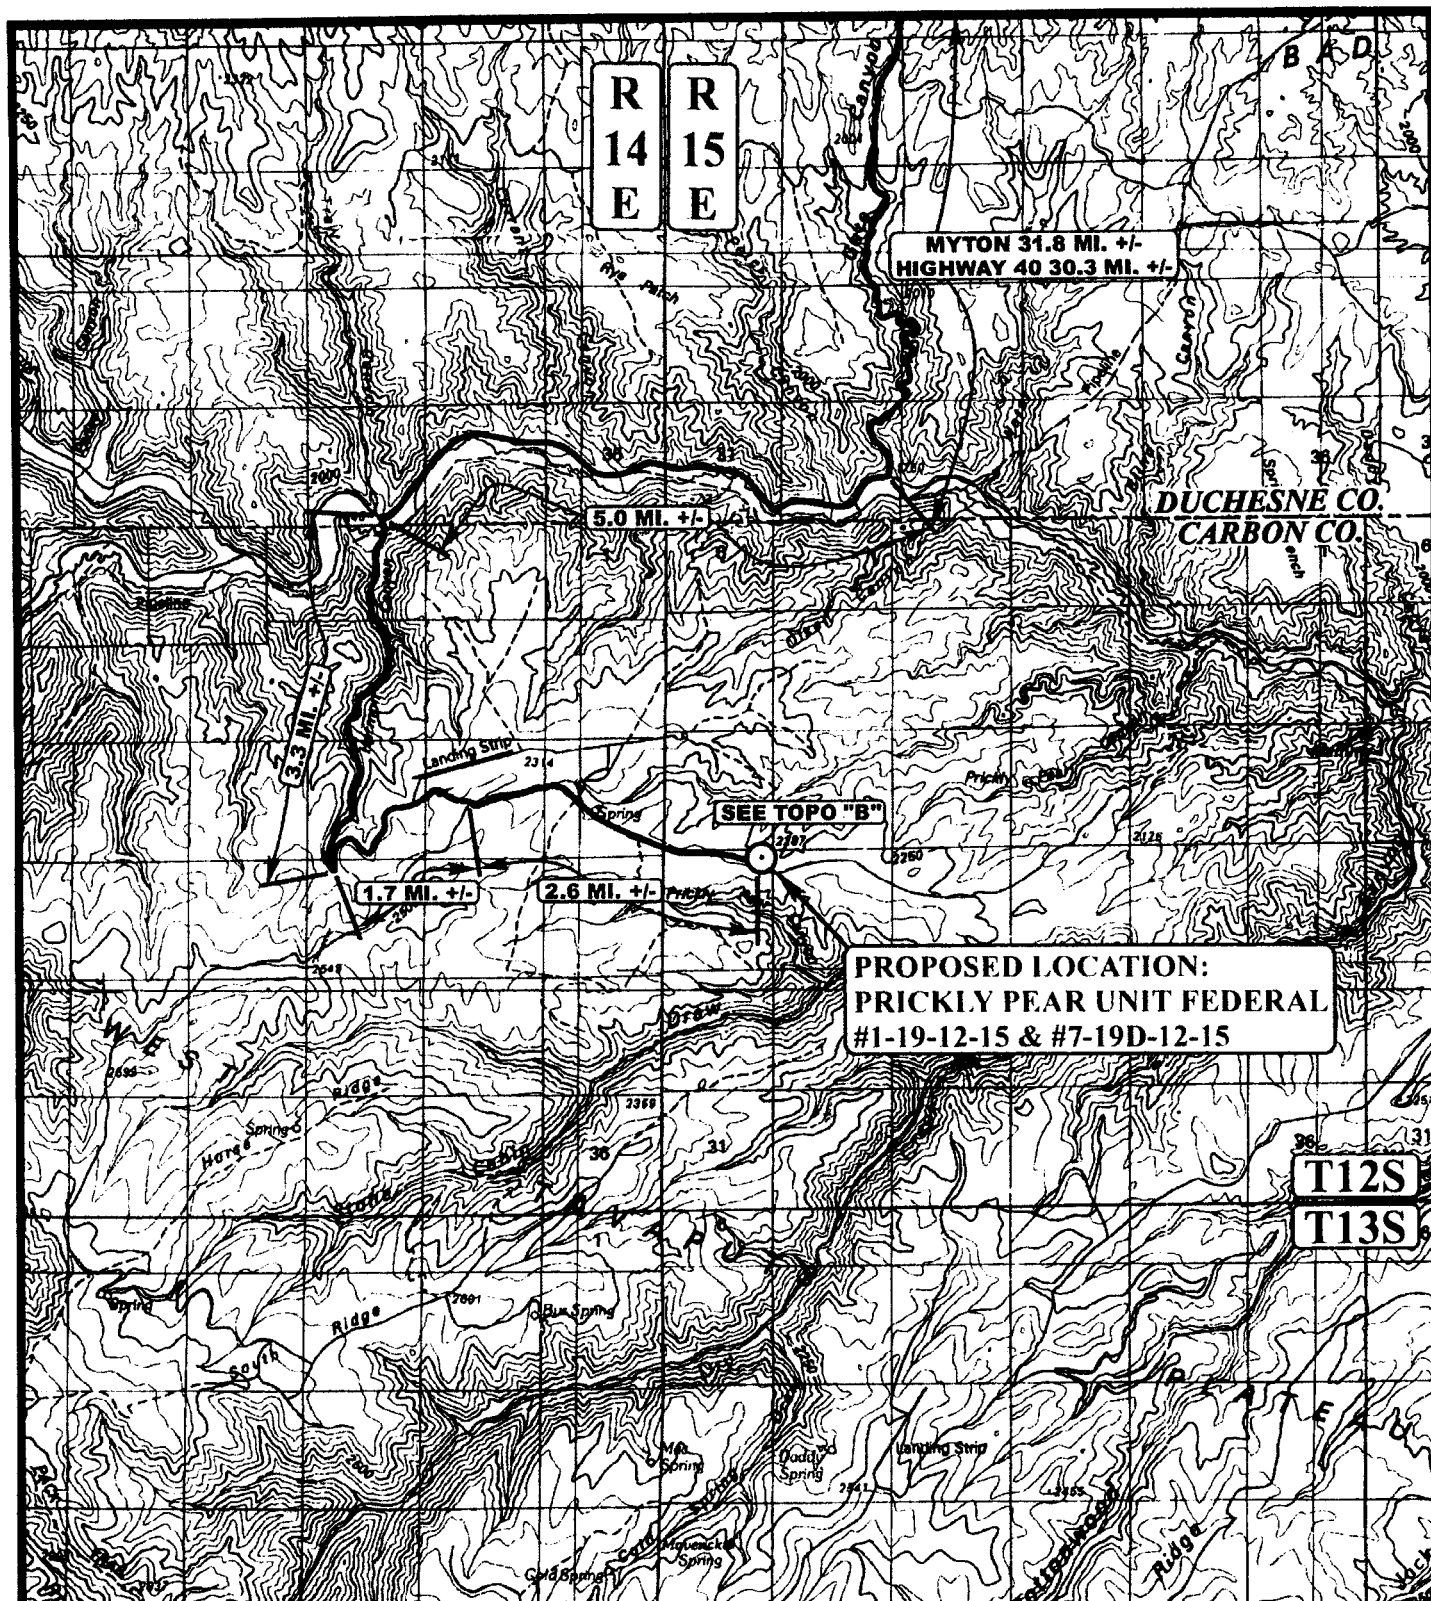

# LEGEND:

○ PROPOSED LOCATION



## BILL BARRETT CORPORATION

PRICKLY PEAR UNIT FEDERAL  
#1-19-12-15 & #7-19D-12-15  
SECTION 19, T12S, R15E, S.L.B.&M.  
NE 1/4 NE 1/4




Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813

TOPOGRAPHIC  
MAP

08 28 06  
MONTH DAY YEAR

SCALE: 1:100,000 DRAWN BY: C.P. REV: 05-24-07 B.C.



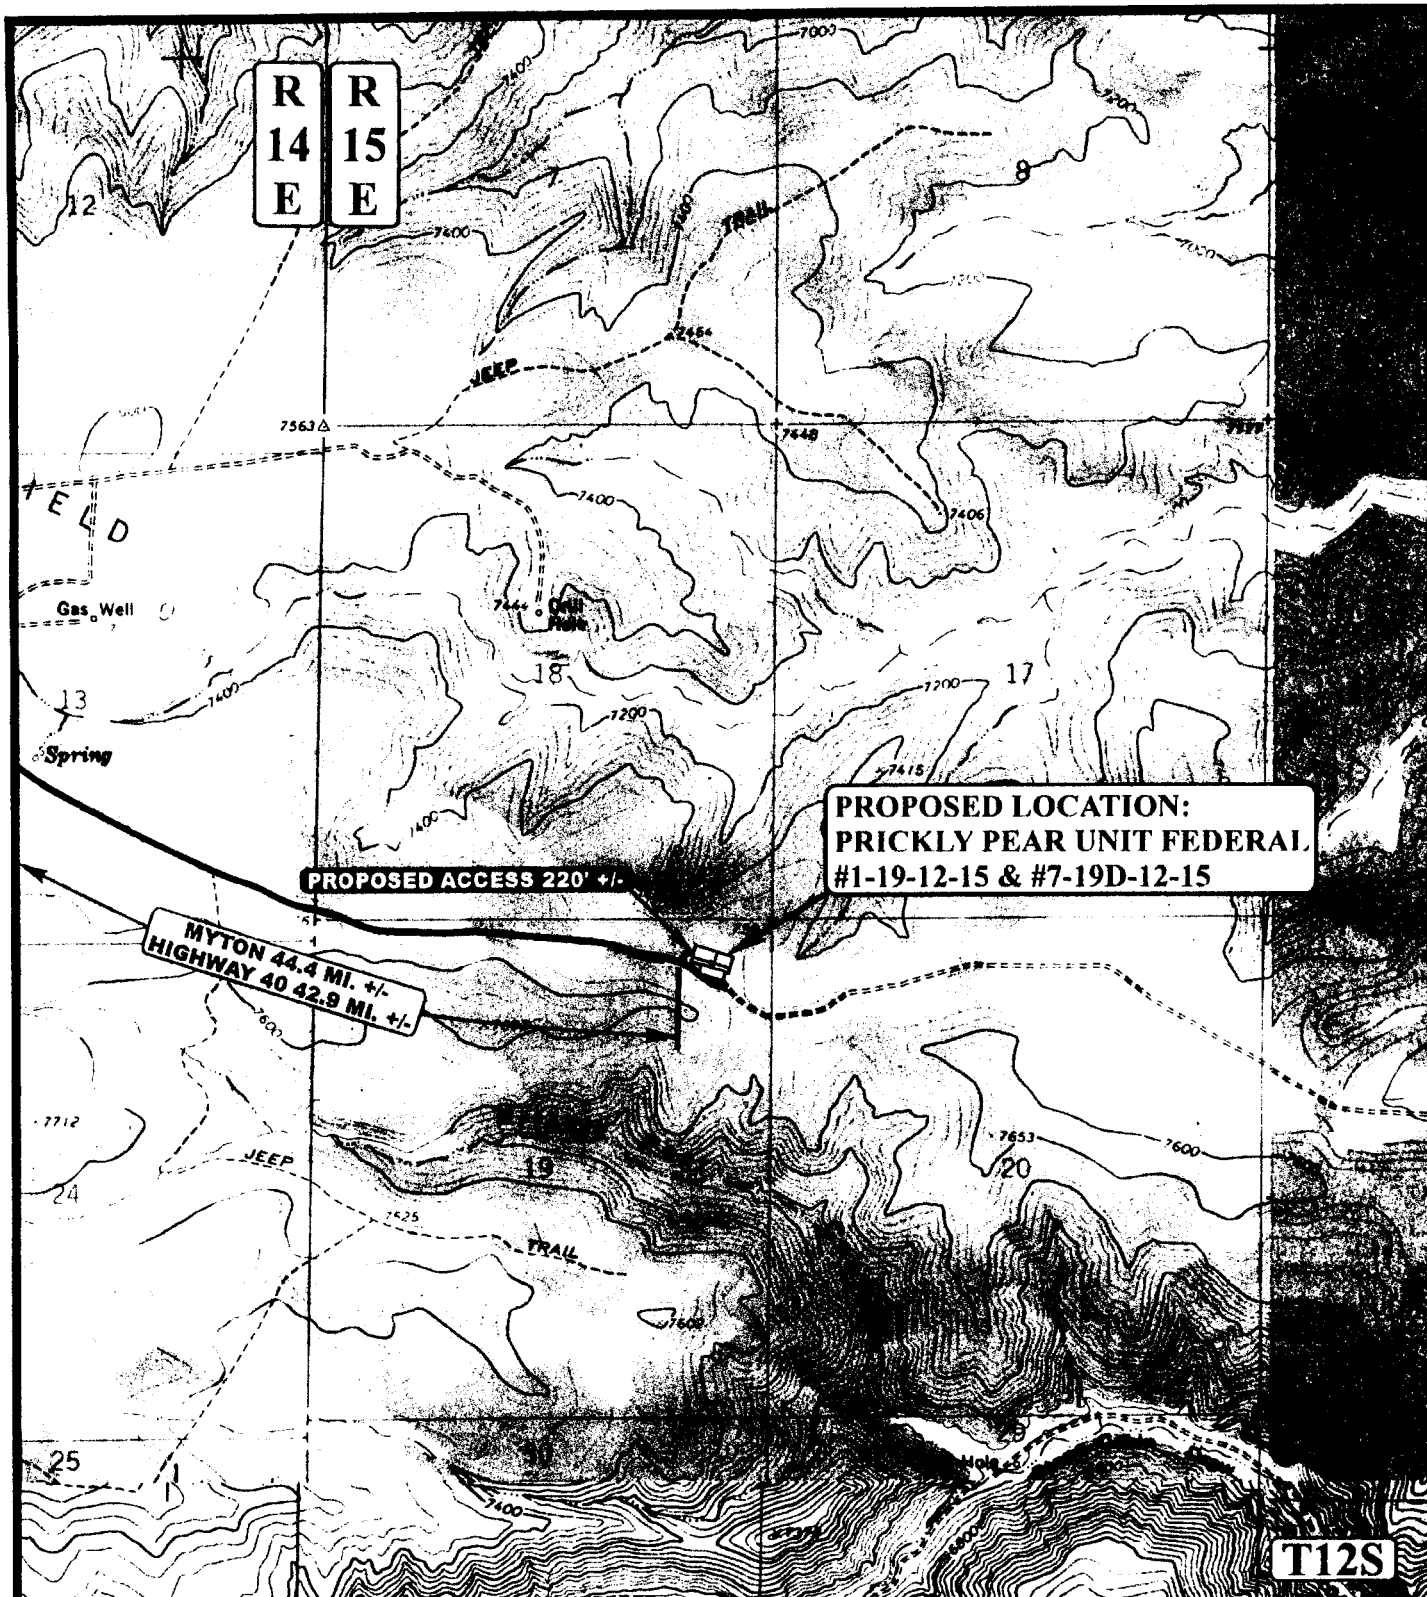

# **LEGEND:**

————— EXISTING ROAD  
 - - - - - PROPOSED ACCESS ROAD



## **BILL BARRETT CORPORATION**

PRICKLY PEAR UNIT FEDERAL  
 #1-19-12-15 & #7-19D-12-15  
 SECTION 19, T12S, R15E, S.L.B.&M.  
 NE 1/4 NE 1/4



Uintah Engineering & Land Surveying  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813


TOPOGRAPHIC  
 MAP

08 28 06  
 MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: C.P. REV: 05-24-07 B.C.





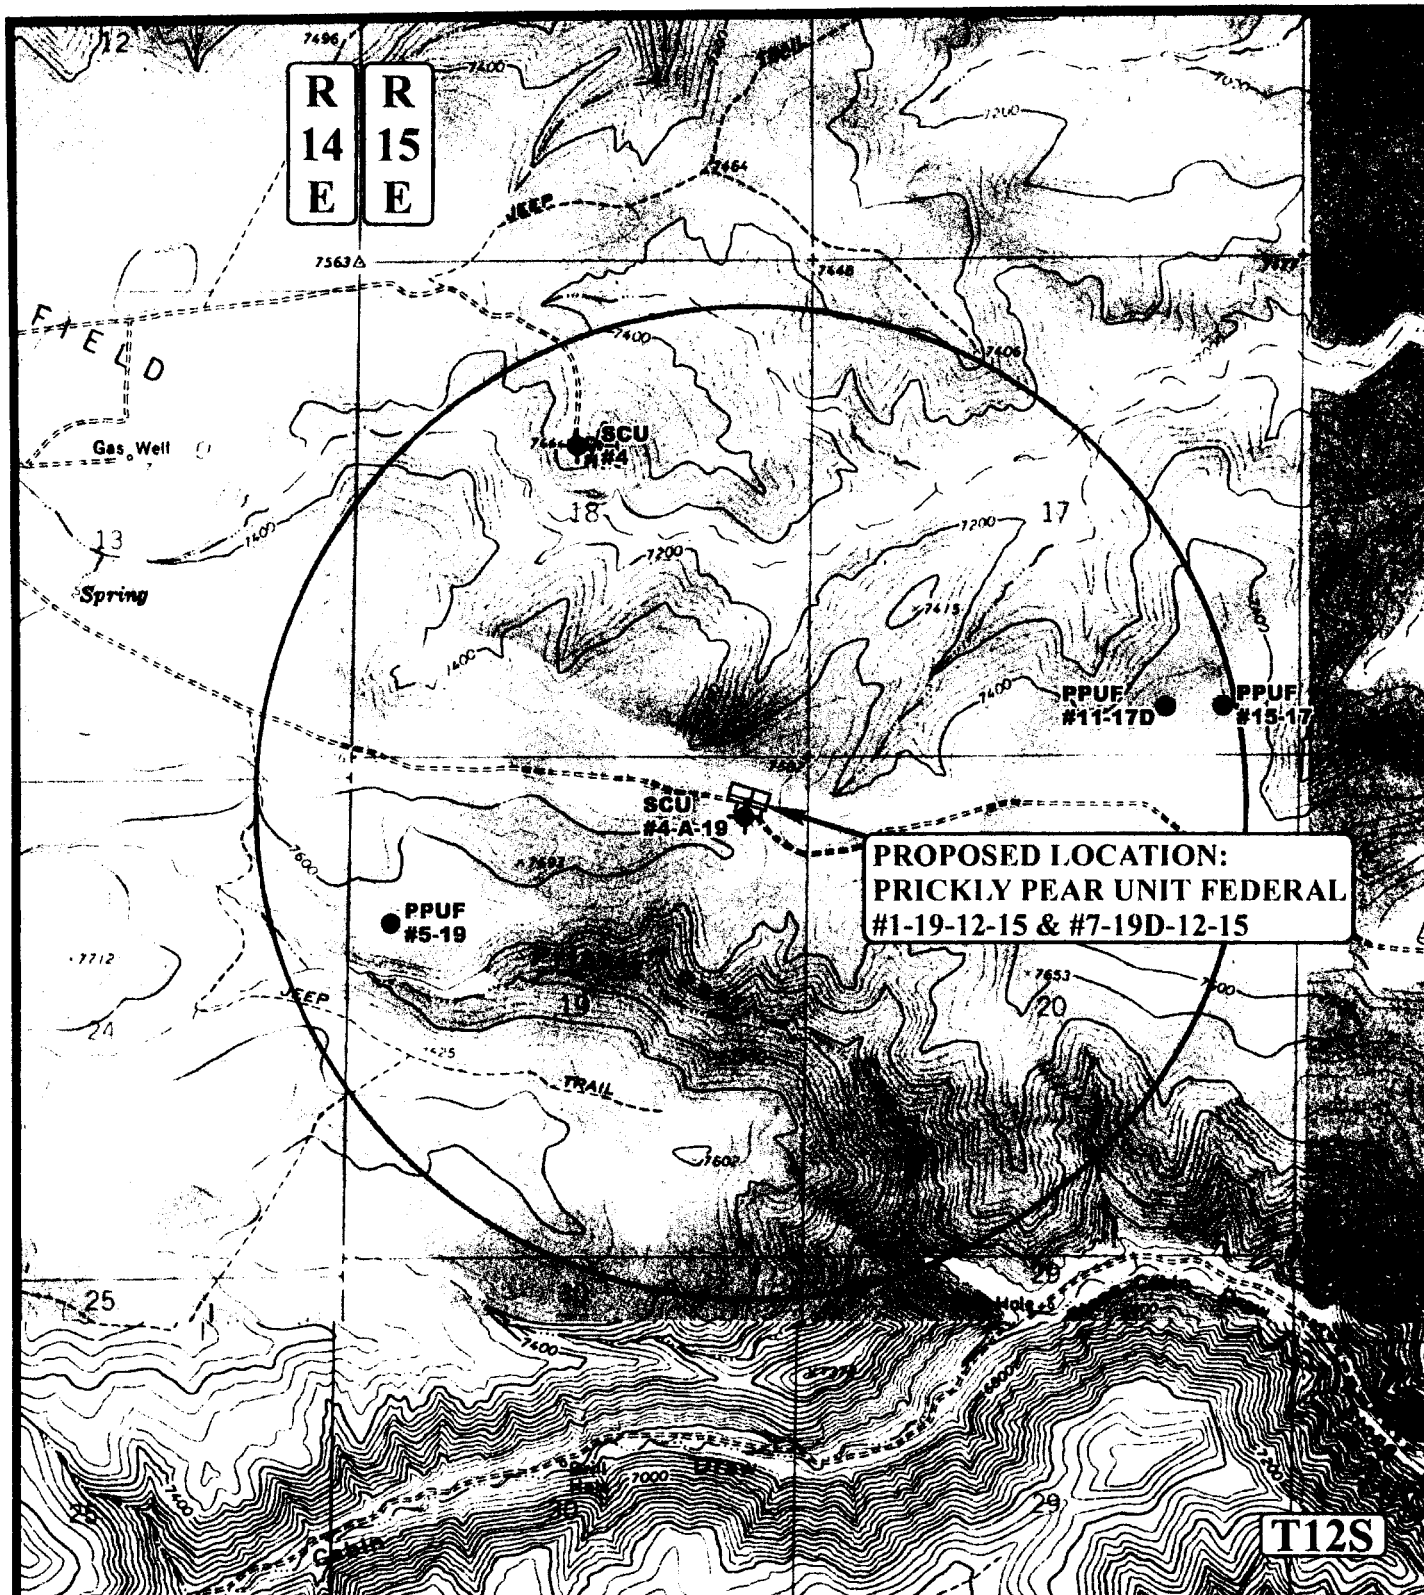

### LEGEND:


# UEIS

## BILL BARRETT CORPORATION

TOPOGRAPHIC  
MAP

**SCALE: 1" = 2000'**

**C**  
**TOPIC**

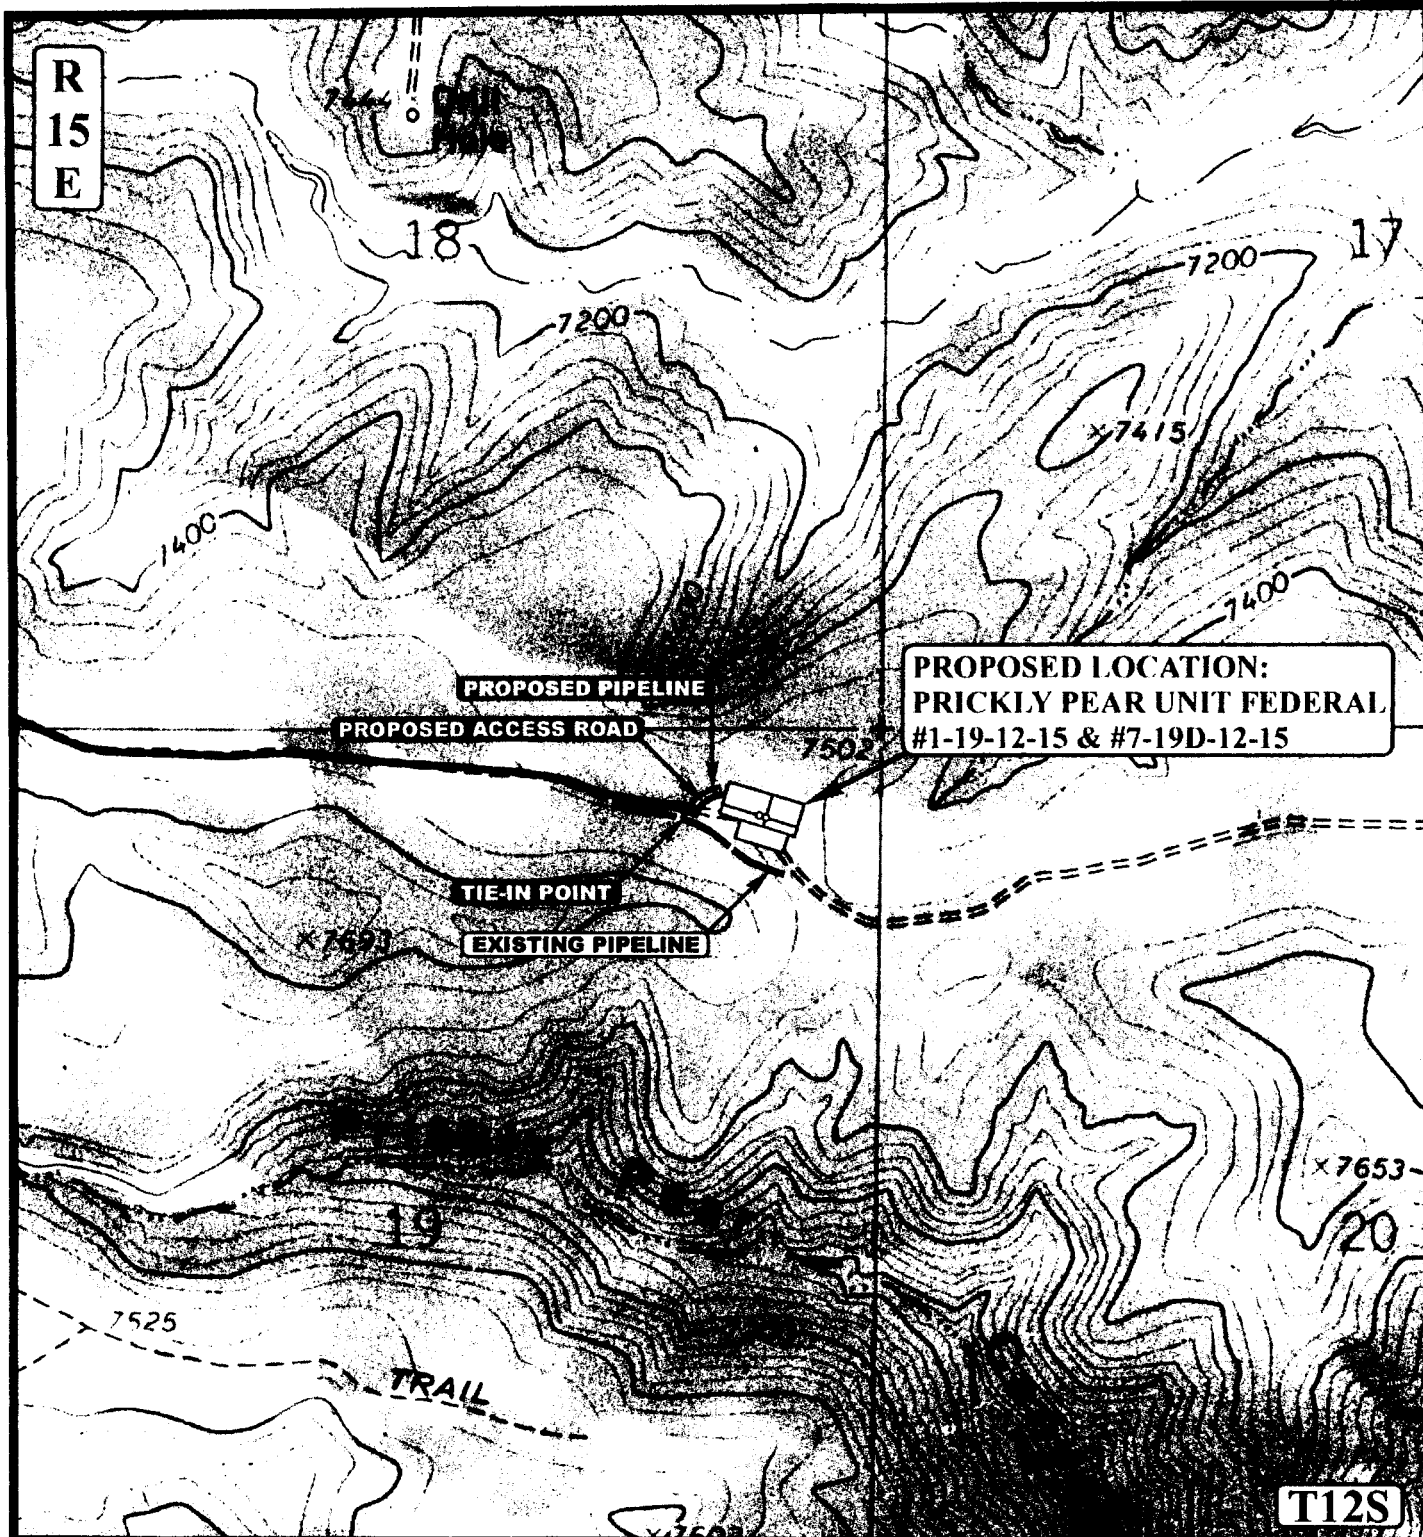

APPROXIMATE TOTAL PIPELINE DISTANCE = 215' +/-

**LEGEND:**

 PROPOSED ACCESS ROAD  
 EXISTING PIPELINE  
 PROPOSED PIPELINE



**BILL BARRETT CORPORATION**

PRICKLY PEAR UNIT FEDERAL  
 #1-19-12-15 & #7-19D-12-15  
 SECTION 19, T12S, R15E, S.L.B.&M.  
 NE 1/4 NE 1/4



Uintah Engineering & Land Surveying  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813

TOPOGRAPHIC  
 MAP

08 28 06  
 MONTH DAY YEAR

SCALE: 1"=1000' DRAWN BY: C.P. REV: 05-24-07 B.C.

**D**  
 TOPO

STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL

OIL WELL ☐

GAS WELL ☒

OTHER \_\_\_\_\_

2. NAME OF OPERATOR:

BILL BARRETT CORPORATION

3. ADDRESS OF OPERATOR:

1099 18th Street, Suite 2300 CITY Denver

STATE CO ZIP 80202

PHONE NUMBER:

(303) 312-8134

5. LEASE DESIGNATION AND SERIAL NUMBER:

UTU - 73669

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

n/a

7. UNIT or CA AGREEMENT NAME:

Prickly Pear Unit/UTU-79487

8. WELL NAME and NUMBER:

Prickly Pear Unit Federal 1-19-12-15

9. API NUMBER:

4300731296

10. FIELD AND POOL, OR WILDCAT:

Undesignated/Wasatch-Mesaverd

4. LOCATION OF WELL

FOOTAGES AT SURFACE: 470' FNL, 618' FEL

COUNTY: Carbon

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NENE 19 12S 15E

STATE:

UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: Permit Extension
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

This sundry is being submitted to request an extension on the APD which expires on 4/26/08.

Approved by the  
Utah Division of  
Oil, Gas and Mining

Date: 04-24-08

By: [Signature]

COPY SENT TO OPERATOR

Date: 4-28-2008

Initials: KS

NAME (PLEASE PRINT) Tracey Fallang

TITLE Environmental/Regulatory Analyst

SIGNATURE

[Signature: Tracey Fallang]

DATE

4/15/08

(This space for State use only)

RECEIVED

APR 23 2008

DIV. OF OIL, GAS & MINING



**Application for Permit to Drill  
Request for Permit Extension  
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4300731266  
Well Name: Prickly Pear Unit Federal 1-19-12-15  
Location: NENE, 470' FNL, 618' FEL, Sec. 19, T12S-R15E  
Company Permit Issued to: Bill Barrett Corporation  
Date Original Permit Issued: 4/26/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☒

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐

Tracy Falloney  
Signature

4/15/08  
Date

Title: Environmental/Regulatory Analyst

Representing: Bill Barrett Corporation

**RECEIVED**  
**APR 23 2008**  
DIV. OF OIL, GAS & MINING



JON M. HUNTSMAN, JR.  
Governor

GARY R. HERBERT  
Lieutenant Governor

# State of Utah

## DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
Executive Director

### Division of Oil, Gas and Mining

JOHN R. BAZA  
Division Director

June 16, 2009

Tracey Fallang  
Bill Barrett Corporation  
1099 18<sup>th</sup> Street, Suite 2300  
Denver, Colorado 80202

Re: APD Rescinded – Prickly Pear U Fed 1-19-12-15 Sec. 19, T.12S, R. 15E  
Carbon County, Utah API No. 43-007-31286

Dear Ms. Fallang:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on April 26, 2007. On April 24, 2008 the Division granted a one-year APD extension. On June 4, 2009, you requested that the division rescind the state approved APD. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective June 4, 2009.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

Diana Mason  
Environmental Scientist

cc: Well File  
Bureau of Land Management, Price

