

UTAH OIL AND GAS CONSERVATION COMMISSION

REMARKS: A WELL LOG _____ ELECTRIC LOGS _____ FILE X WATER SANDS _____ LOCATION INSPECTED _____ SUB. REPORT/abd _____

DATE FILED **6-11-84**

LAND: FEE & PATENTED _____ STATE LEASE NO. _____ PUBLIC LEASE NO. _____ INDIAN **14-20-H62-3421**

DRILLING APPROVED: **6-18-84 - OIL**

SPUDED IN: _____

COMPLETED: _____ PUT TO PRODUCING: _____

INITIAL PRODUCTION: _____

GRAVITY A.P.I. _____

GOR: _____

PRODUCING ZONES: _____

TOTAL DEPTH: _____

WELL ELEVATION: **07163' GR**

DATE ABANDONED: **Application Reopened 3-20-86**

FIELD: **WILDCAT**

UNIT: _____

COUNTY: **DUCHESNE**

WELL NO. **S. E. INDIAN CANYON UTE TRIBAL #1-10** API #**43-013-30967**

LOCATION **509' FNL** FT. FROM (N) (S) LINE. **671' FEL** FT. FROM (E) (W) LINE. **NENE** 1/4 - 1/4 SEC. **10**

TWP.	RGE.	SEC.	OPERATOR	TWP.	RGE.	SEC.	OPERATOR
------	------	------	----------	------	------	------	----------

5S	5W	10	LOMAX EXPLORATION CO.				
----	----	----	-----------------------	--	--	--	--

RECEIVED
JUN 11 1984
DIVISION OF OIL
GAS & MINING

June 6, 1984

Bureau of Land Management
170 South 500 East
Vernal, Utah 84078

Lomax Exploration Company
APD/NTL-6 Transmittal
S.E. Indian Canyon Ute Tribal #1-10
NE/NE Sec 10, T5S, R5W
Duchesne County, Utah


Gentlemen:

Please find enclosed the original and three (3) copies of the APD/NTL-6 for the subject well.

It is requested that a copy of the approval be mailed to Lomax's Roosevelt office at P.O. Box 1446, Roosevelt, Utah 84066.

Please advise if you need additional information.

Yours very truly,

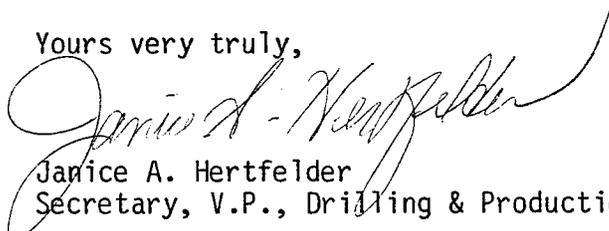
Janice A. Hertfelder
Secretary, V.P., Drilling & Production

JAH/
Enclosure - 4

- cc: State of Utah
Div. Of Oil & Gas
4241 State Office Bldg.
Salt Lake City, Utah 84114
- cc: Bureau of Indian Affairs
Realty Property Management Office
Uinta & Ouray Agency
Ft. Duchesne, Utah 84026

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

5. LEASE DESIGNATION AND SERIAL NO.
BIA-14-20-H62-3421

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
S.E. Indian Canyon Ute Triba

9. WELL NO.
#1-10

10. FIELD AND POOL, OR WILDCAT
 Wildcat

11. SEC., T., E., M., OR BLK. AND SURVEY OR AREA
Sec 10, T5S, R5W

12. COUNTY OR PARISH | 13. STATE
Duchesne | Utah

1a. TYPE OF WORK
 DRILL DEEPEN PLUG BACK

b. TYPE OF WELL
 OIL WELL GAS WELL OTHER SINGLE ZONE MULTIPLE ZONE

2. NAME OF OPERATOR
Lomax Exploration Company

3. ADDRESS OF OPERATOR
P.O.Box 4503, Houston, Texas 77210

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)*
 At surface 509' FNL & 671' FEL NE/NE
 At proposed prod. zone

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*
27 miles SW of Myton, Utah

15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any) 509'

16. NO. OF ACRES IN LEASE 640

17. NO. OF ACRES ASSIGNED TO THIS WELL 40

18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT. NA

19. PROPOSED DEPTH 6200' *Wanted*

20. ROTARY OR CABLE TOOLS
Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)
6763' GR

22. APPROX. DATE WORK WILL START*
September, 1984

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4"	8 5/8"	24#	300'	To Surface
7 7/8"	5 1/2"	17#	TD	As Required

RECEIVED
JUN 11 1984

**APPROVED BY THE STATE
OF UTAH DIVISION OF
OIL, GAS, AND MINING**
DATE: 6/18/84
BY: John R. Day

DIVISION OF OIL
GAS & MINING

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED G.L. Pruitt TITLE V.P., Drilling & Production DATE June 6, 1984

(This space for Federal or State office use)

PERMIT NO. _____ APPROVAL DATE _____

APPROVED BY _____ TITLE _____ DATE _____


CONDITIONS OF APPROVAL, IF ANY:

***See Instructions On Reverse Side**

T 5 S, R 5 W, U.S.B.&M.


PROJECT
LOMAX EXPLORATION CO.

Well location, *SE INDIAN CANYON UTE TRIBAL #1-10*, located as shown in the NE 1/4 NE 1/4 Section 10, T5S, R5W, U.S.B.&M. Duchesne County, Utah.

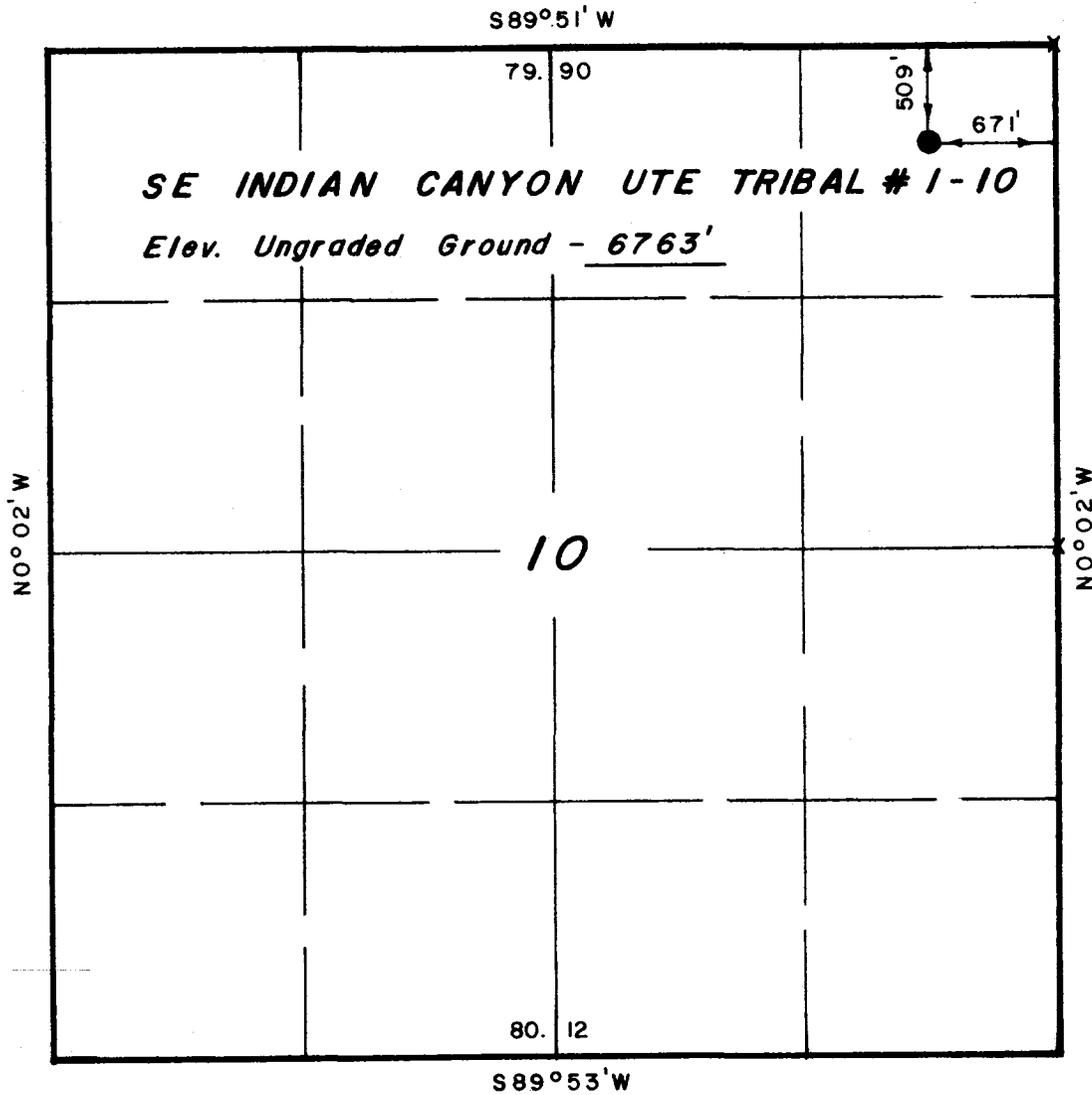

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PREPARED FROM FIELD NOTES OF ACTUAL SURVEY MADE UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

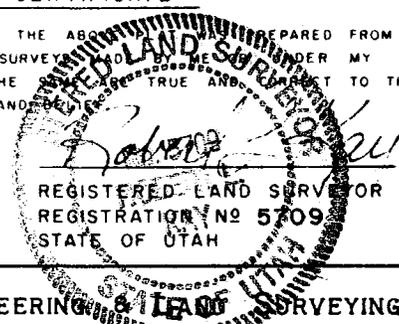

UINTAH ENGINEERING & LAND SURVEYING
 P.O. BOX Q - 85 SOUTH 200 EAST
 VERNAL, UTAH - 84078

X = Section Corners Located

SCALE 1" = 1000'	DATE 4/19/84
PARTY R.K. J.F. S.B.	REFERENCES GLO Plat
WEATHER Worm	FILE LOMAX

TEN POINT WELL PROGRAM

S.E. INDIAN CANYON UTE TRIBAL #1-10

NE/NE Section 10, T5S, R5W
DUCHESNE COUNTY, UTAH

1. GEOLOGIC SURFACE FORMATION:

Uinta formation of Upper Eocene Age

2. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:

Uinta	Surface
Green River	1450'
Wasatch	6250'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:

Green River	5700'	Oil
-------------	-------	-----

4. PROPOSED CASING PROGRAM:

8 5/8", 24#, J-55 Casing; Set @ 300'
5 1/2", 17#, J-55 Casing; Set @ TD

All Casing will be new.

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

The operators minimum specifications for pressure control equipment are as follows:

A 10" Series 900 Hydril Bag type BOP and a 10" Double Ram Hydraulic unit with a closing unit will be utilized. Pressure tests of BOP's to 1000# will be made prior to drilling surface plug and operation will be checked daily. (See Exhibit A)

6. TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:

It is proposed that the hole be drilled with fresh water to the "J" zone and with mud thereafter. The mud system will be a water based gel-chemical, weighted to 10.0 ppg as necessary for gas control.

7. AUXILIARY SAFETY EQUIPMENT TO BE USED:

Auxiliary safety equipment will be Kelly Cock, and a TIW valve with drill pipe threads.

8. TESTING, LOGGING AND CORING PROGRAMS:

No coring or drill stem testing has been scheduled for this well. The logging will consist of a Dual Induction Laterolog and a Compensated Neutron-Formation Density.

9. ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:

It is not anticipated that abnormal pressures or temperatures will be encountered; nor that any other abnormal hazards such as H₂S gas will be encountered in this area.

10. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:

It is anticipated that operations will commence approximately September, 1984.

LOMAX EXPLORATION CO.

13 Point Surface Use Plan

For

Well Location

S.E. Indian Canyon Ute Tribal #1-10

Located In

Section 10, T5S, R5W, U.S.B. & M.

Duchesne County, Utah

LOMAX EXPLORATION CO.
S.E. Indian Canyon Ute Tribal #1-10
Section 10, T5S, R5W, U.S.B. & M.

1. EXISTING ROADS

See attached Topographic Map "A".

To reach LOMAX EXPLORATION CO. well location site S.E. Indian Canyon Ute Tribal #1-10 located in the NE 1/4 NE 1/4 Section 10, T5S, R5W, U.S.B. & M., Myton, Utah:

Proceed Westerly out of Myton, Utah along U.S. Highway 40 + 8.6 miles to the Junction with an improved county road to the Southwest; proceed Southwesterly along this road 7.1 + miles to its Junction with an existing dirt road to the West; proceed Westerly along this road 6.4 miles to its Junction with an existing dirt road to the Northeast; then West by Southwest; proceed along this road 4.7 miles to its junction with the proposed access road. (To be discussed in Item #2)

U.S. Highway 40 is a bituminous surface road from Myton to the beginning of the county road. This highway is maintained by state road crews. The county road described above is a dirt road that was constructed out of the materials accumulated during its construction. The county road is maintained by Duchesne County Forces.

There is no anticipated construction on any other of the above described roads. They will meet the necessary standards required to facilitate an orderly flow of traffic during the drilling, completion, and production phases of this well.

2. PLANNED ACCESS ROAD

See Topographic Map "B".

The planned road leaves the existing dirt road described in Item #1 in the NW 1/4 NW 1/4 Section 10, T5S, R5W, U.S.B. & M., and proceeds in a Southeasterly direction approximately 0.3 miles to the proposed location site.

The proposed access road will be an 18' crown road (9' either side of the centerline) with drain ditches along either side of the proposed road where it is determined necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area.

Back slopes along the cut areas of the road will be 1 1/2 to 1 slopes and terraced.

There will be no culverts required along this access road, there are no major drainages encountered along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattleguards required.

3. LOCATION OF EXISTING WELLS

See Topographic Map "B".

There are no known water wells, producing wells, abandoned wells, temporarily abandoned wells, drilling wells, shut in wells, injection wells, monitoring or observation wells for other resources within a one-mile radius of this location site.

4. LOCATION OF EXISTING AND PROPOSED FACILITIES

At the present time there are no known LOMAX EXPLORATION production facilities, tank batteries, oil gathering lines, within a one-mile radius of this location site.

In the event that production is established at this location site, all production will be contained within the area of the proposed location site. It is not known at this time what future production facilities will be required at this well site. In the event production is established plans will be submitted to the proper authorities in detail stating the proposed containment and transportation of the produced fluids. Any are required for any future production facilities will be constructed using bull dozers, graders, and workman crews to construct and place the facilities.

If there are any deviations from the above paragraphs, then all appropriate agencies will be notified prior to construction and all necessary requests and applications will be made.

Rehabilitation of disturbed areas no longer needed for operations after construction is completed will meet the requirements of Item #10.

5. LOCATION AND TYPE OF WATER SUPPLY

See Topographic Map "B".

Water to be used in the drilling of this well will be hauled by truck over the existing roads described in Item #1 from the Duchesne River near Bridgeland, Utah, approximately 19.4 miles by road Northeast of the proposed location site.

In the event that this source is not used, an alternate source will be used and all necessary arrangements will be made to acquire the water from other sources and will be hauled by truck over portions of the roads that are described in Items #1 and #2.

The local governmental agencies and any other parties involved will be notified of any deviations and all governing guidelines and regulations will be strictly adhered to.

There will be no water well drilled at this location site.

LOMAX EXPLORATION CO.
S.E. Indian Canyon Ute Tribal #1-10
Section 10, T5S, R5W, U.S.B. & M.

6. SOURCE OF CONSTRUCTION MATERIALS

All construction material for this location site and access road shall be borrow material accumulated during construction of the location site and access road. No additional road reavels or pit lining materials from other sources are anticipated at this time, but if they are required, the appropriate actions will be taken to acquire them from private sources.

The native materials that will be used in the construction of this location site and access road will consist of sand-clay soil and sandstone and shale material gathered during the actual construction of the road and location.

7. METHOD OF HANDLING WASTE DISPOSAL

See Location Layout Sheet.

A reserve pit will be constructed.

The reserve pit will be approximately 10' deep and at least one-half of this depth shall be below the surface of the existing ground.

One half of the reserve pit will be used as a fresh water storage area during the drilling of this well and the other one half will be used to store non-flammable materials such as cuttings, salts, drilling fluids, chemicals and produced fluids, etc.

If deemed necessary by the agencies concerned to prevent contamination to surrounding areas, the reserve pits will be lined with a gel.

The pits will have wire and overhead flagging installed if deemed necessary to protect the water fowl, wildlife, and domestic animals.

At the onset of drilling, the reserve pit will be fenced on three sides and at the time drilling activities are completed, it will be fenced on the fourth side and allowed to dry completely prior to the time that backfilling and other reclamation activities are attempted.

When the reserve pit dries and reclamation activities commence, the pits will be covered with a minimum of four feet of soil and all requirements in Item #10 will be followed.

All garbage and other waste material will be contained in a trash basket made of small mesh wire and will be taken to the nearest sanitary landfill for disposal upon completion of the well.

A portable chemical toilet will be provided for human waste.

8. ANCILLARY FACILITIES

There are no ancillary facilities planned for at the present time and none forseen in the near future.

9. WELL SITE LAYOUT

See attached Location Layout Sheet.

All of the agencies shall be notified before any construction begins on the proposed location site.

As mentioned in Item #7, the pits will be unlined unless it is determined by the representatives of the agencies involved that the materials are too porous and would cause contamination to the surrounding area; then the pits will be lined with a gel and any other type of material necessary to make it safe and tight.

When drilling activities commence, all work shall proceed in a neat and orderly sequence.

10. PLANS FOR RESTORATION OF SURFACE

As there is some topsoil on the location site, all topsoil shall be stripped and stockpiled. (See Location Layout Sheet and Item #9). When all drilling and production activities have been completed, the location site and access road will be reshaped to the original contour and stockpiled topsoil spread over the disturbed area.

Any drainages re-routed during construction activities shall be restored to their original line of flow as near as possible. Fences around pits are to be removed upon completion of drilling activities and all waste being contained in the trash basket shall be hauled to the nearest Sanitary Landfill.

As mentioned in Item #7, the reserve pit will be completely fenced and wired with overhead wire and flagging installed. If there is oil in the pits, it will be allowed to dry completely before covering.

Restoration activities shall begin within 90 days after completion of the well. Once restoration activities have begun, they shall be completed within 30 days.

When restoration activities have been completed, the location site shall be reseeded with a seed mixture recommended by the surface owner when the moisture content of the soil is adequate for germination. The Lessee further covenants and agrees that all of said clean-up and restoration activities shall be done and performed in a diligent and most workmanlike manner and in strict conformity with the above mentioned Items #7 and #10.

11. OTHER INFORMATION

The Topography of the General Area - (See Topographic Map "A").

The area is at the Southwest end of the Uintah Basin which is formed by the Book Cliff Mountains and the Green River to the South and the Uinta Mountains to the North. The area is interlaced with numerous canyons and ridges formed in sandstone, cobblerock, conglomerate, and shale deposits.

LOMAX EXPLORATION CO.
S.E. Indian Canyon Ute Tribal #1-10
Section 10, T5S, R5W, U.S.B. & M.

The majority of the smaller drainages are of a non-perennial nature with normal flow limited to the early spring run-off and heavy thunderstorms or rainstorms of high intensity that last over an extended period of time and are extremely rare in nature as the normal annual precipitation is only 8".

The basin floor is interlaced with numerous canyons and ridges formed by the non-perennial streams of the area. The sides of these canyons are steep and ledges formed in sandstone ledges, conglomerate deposits, and shale are common in this area.

The geologic structures of the area that are visible are of the Uintah formation (Eocene Epoch) Tertiary Period in the upper elevations and the cobblestone and younger alluvial deposits from the Quaternary Period.

The soils of this semi-arid area are of the Uinta Formation and Duchesne River Formation, (the Fluvial Sandstone and Mudstone) from the Eocene Epoch and Quaternary Epoch (gravel surfaces) and the visible geologic structure consists of light brownish-gray clays (OL) to sandy soils (SM-ML) with poor gravels and shales and outcrops of rock (sandstone, mudstone, conglomerate, and shale).

Due to the low precipitation average, climatic conditions and the marginal types of soils, the vegetation that is found in the area is common of the semi-arid regions and consists of areas of sagebrush, rabbitbrush some grasses and cacti, on the upper benches with cottonwoods, beach, willow, Russian Olives, and grasses along the lower levels close to the wet areas and streams.

The fauna of the area consists predominantly of the mule deer, coyotes, rabbits and various reptiles common to the area. The area is used by man for the primary purpose of grazing domestic livestock.

The birds of the area are raptors, finches, ground sparrows, magpies, crows, and jays.

The Topography of the Immediate Area - (See Topographic Map "B")

S.E. Indian Canyon Ute Tribal #1-10 sits on a ridge above Cottonwood Canyon a non-perennial drainage which drains to the Northeast into the Duchesne River. The ground slopes through the location site from the Northwest to the Southeast at approximately a 5% slope.

The immediate area around this location is vegetated by sagebrush and grasses, with sparse amounts of Juniper and Pinion Pine.

There are no occupied dwellings or other facilities of this nature in the general area.

All lands that will be damaged by a certified archeologist whether there are any archeological findings in the immediate area of this location site.

It will be determined by a certified archeologist whether there are any archeological findings in the immediate area of this location site.

LOMAX EXPLORATION CO
S.E. Indian Canyon Ute Tribal #1-10
Section 10, T5S, R5W, U.S.B. & M.

There are no historical, or cultural sites within any reasonable proximity of the proposed location site.

12. LESSEE'S OR OPERATOR'S REPRESENTATIVE

Jack Pruitt
Lomax Exploration Co.
P.O. Box 4503
Houston, TX 77210-4503


1-713-931-9276

13. CERTIFICATION



I hereby certify that I, or persons under my direct supervision have inspected the proposed drill site and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are to the best of my knowledge true and correct; and that the work associated with the operation proposed herein will be performed by LOMAX EXPLORATION CO. and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

Date

6/6/84

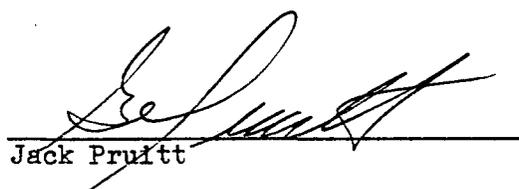


Jack Pruitt

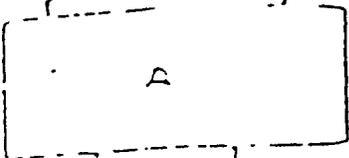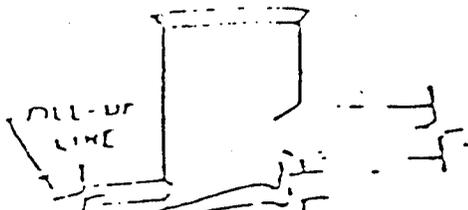

Shaffer Spherical
10" 900




Cameron Space Saver

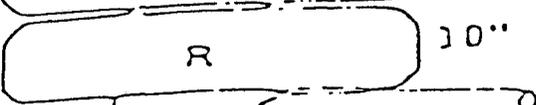

10" 900






Casinghead

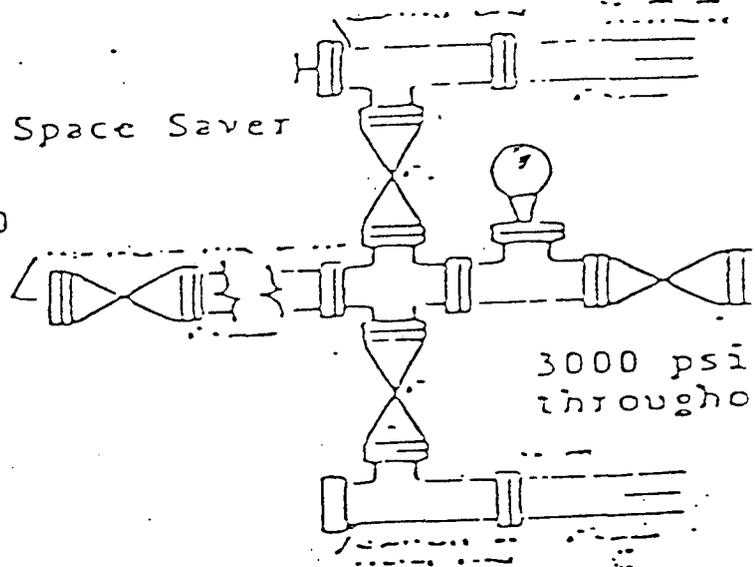

3000 psi
througho

LOMAX EXPLORATION Co.
SE INDIAN CANYON UTE TRIBAL #1-10
 LOCATION LAYOUT & CUT SHEET

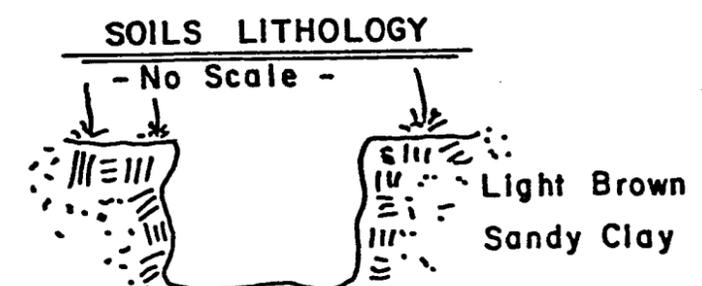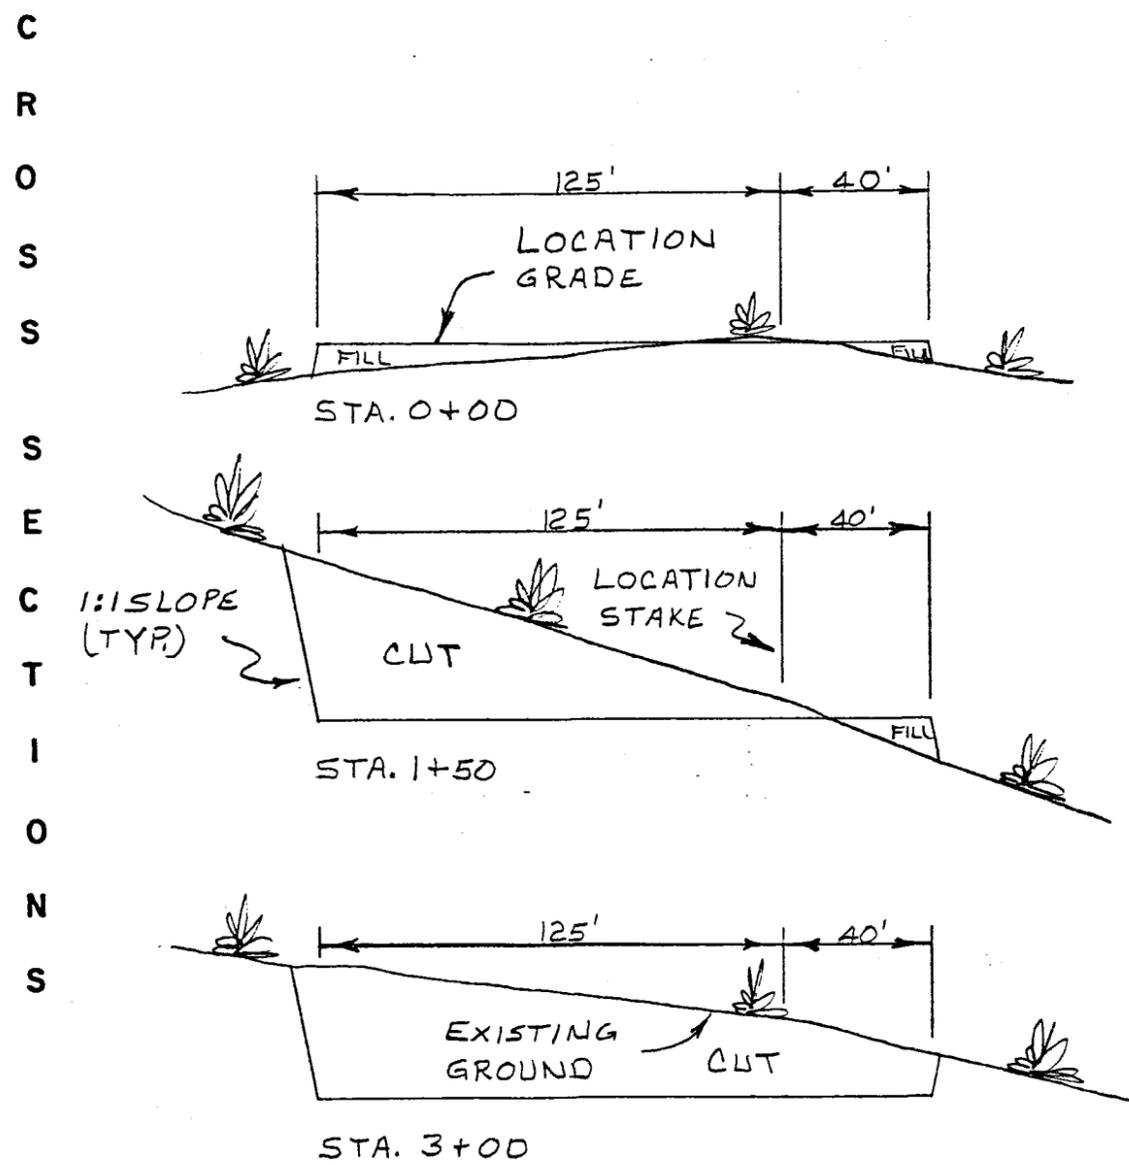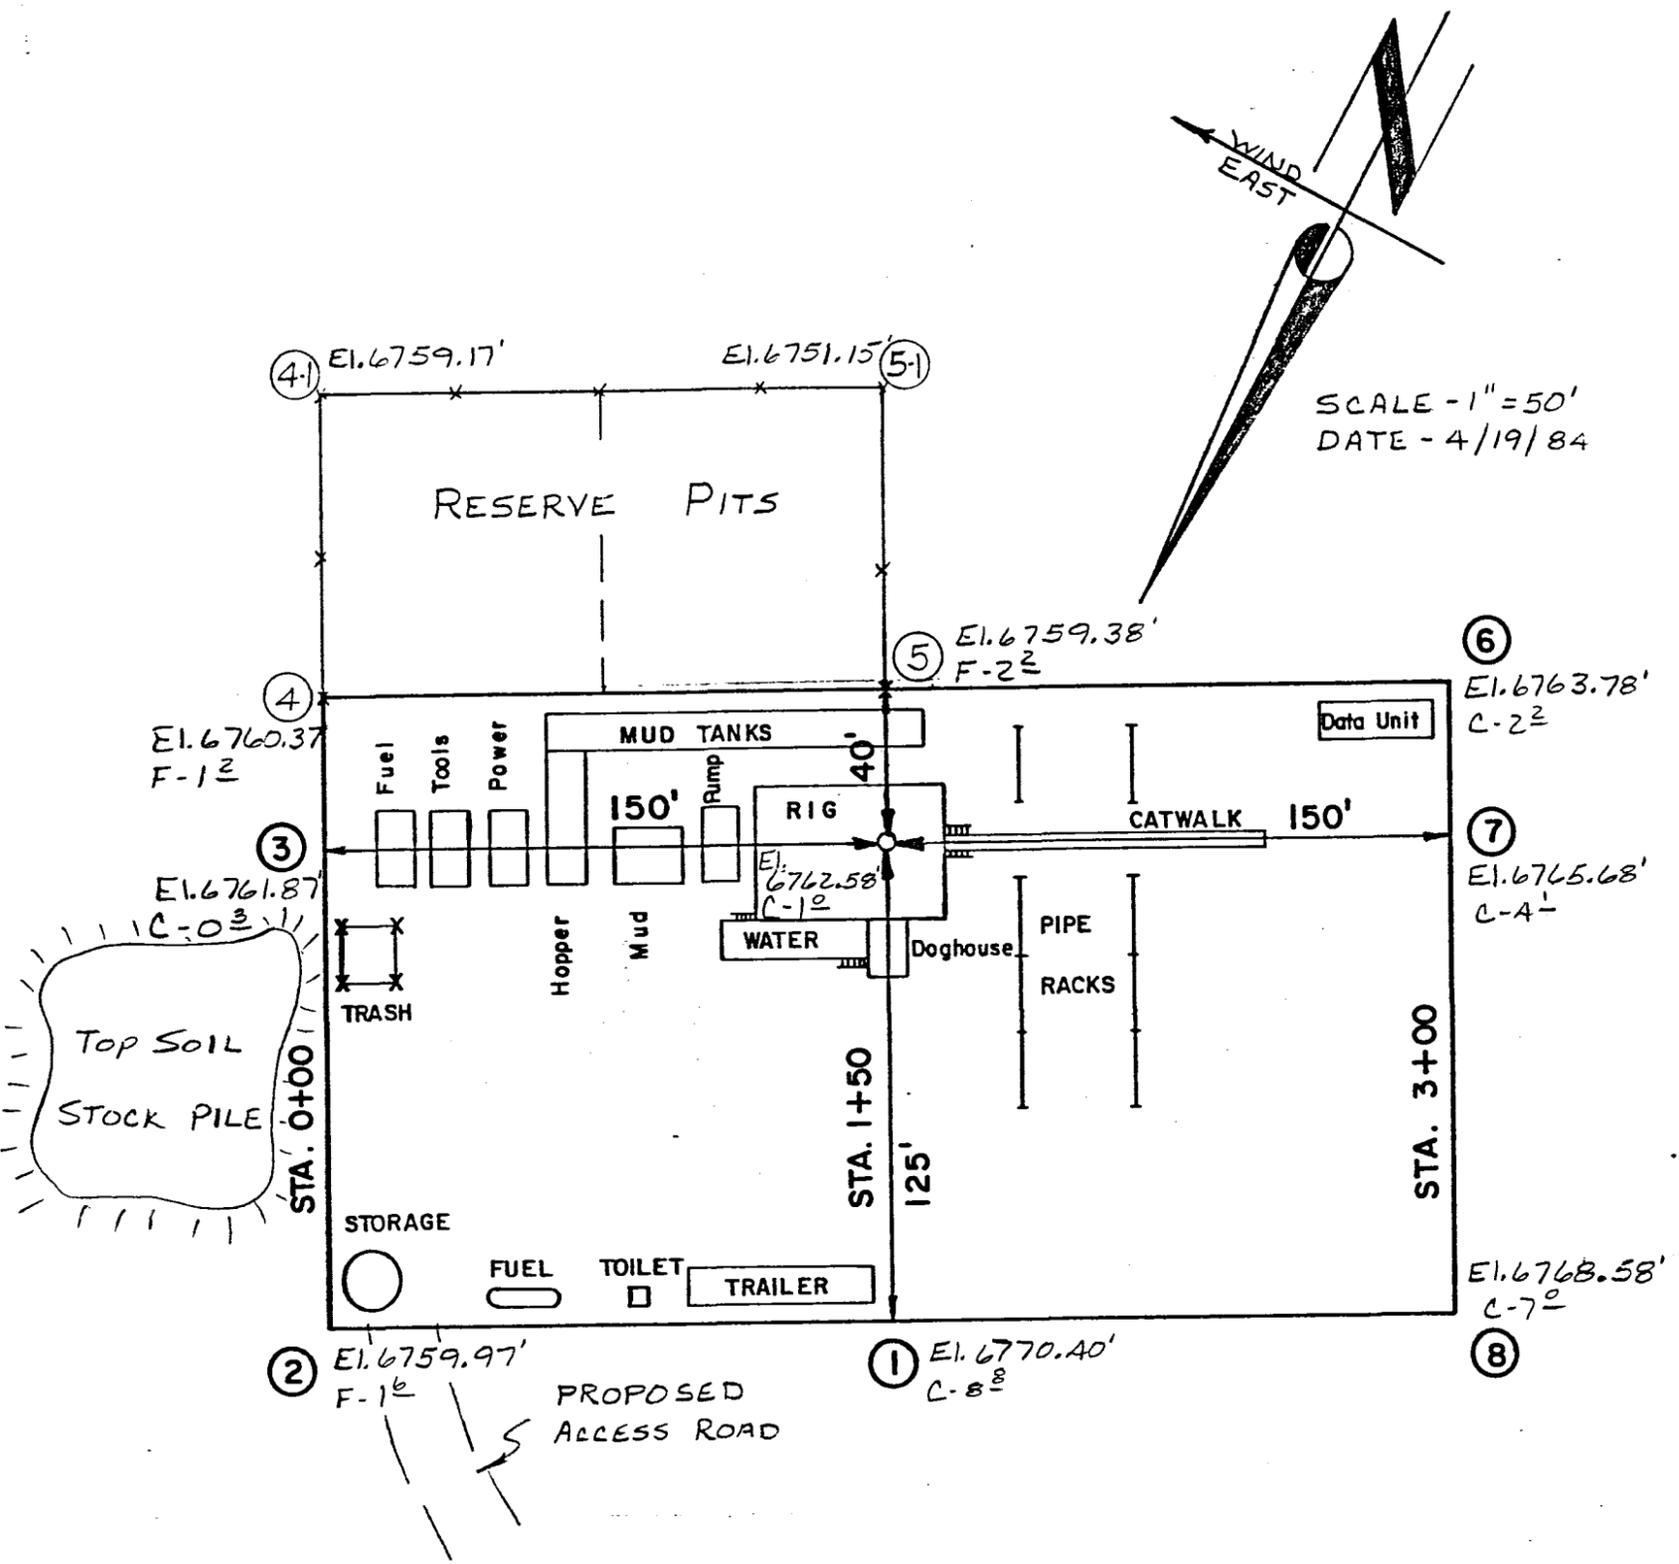

Scales
 1" = 50'

APPROXIMATE YARDAGES

Cubic Yards Cut - 6,354
 Cubic Yards Fill - 519

LOMAX EXPLORATION CO.


SE INDIAN CANYON UTE TRIBAL #1-10

PROPOSED LOCATION

TOPO.

MAP "A"

SCALE 1" = 4 MI.

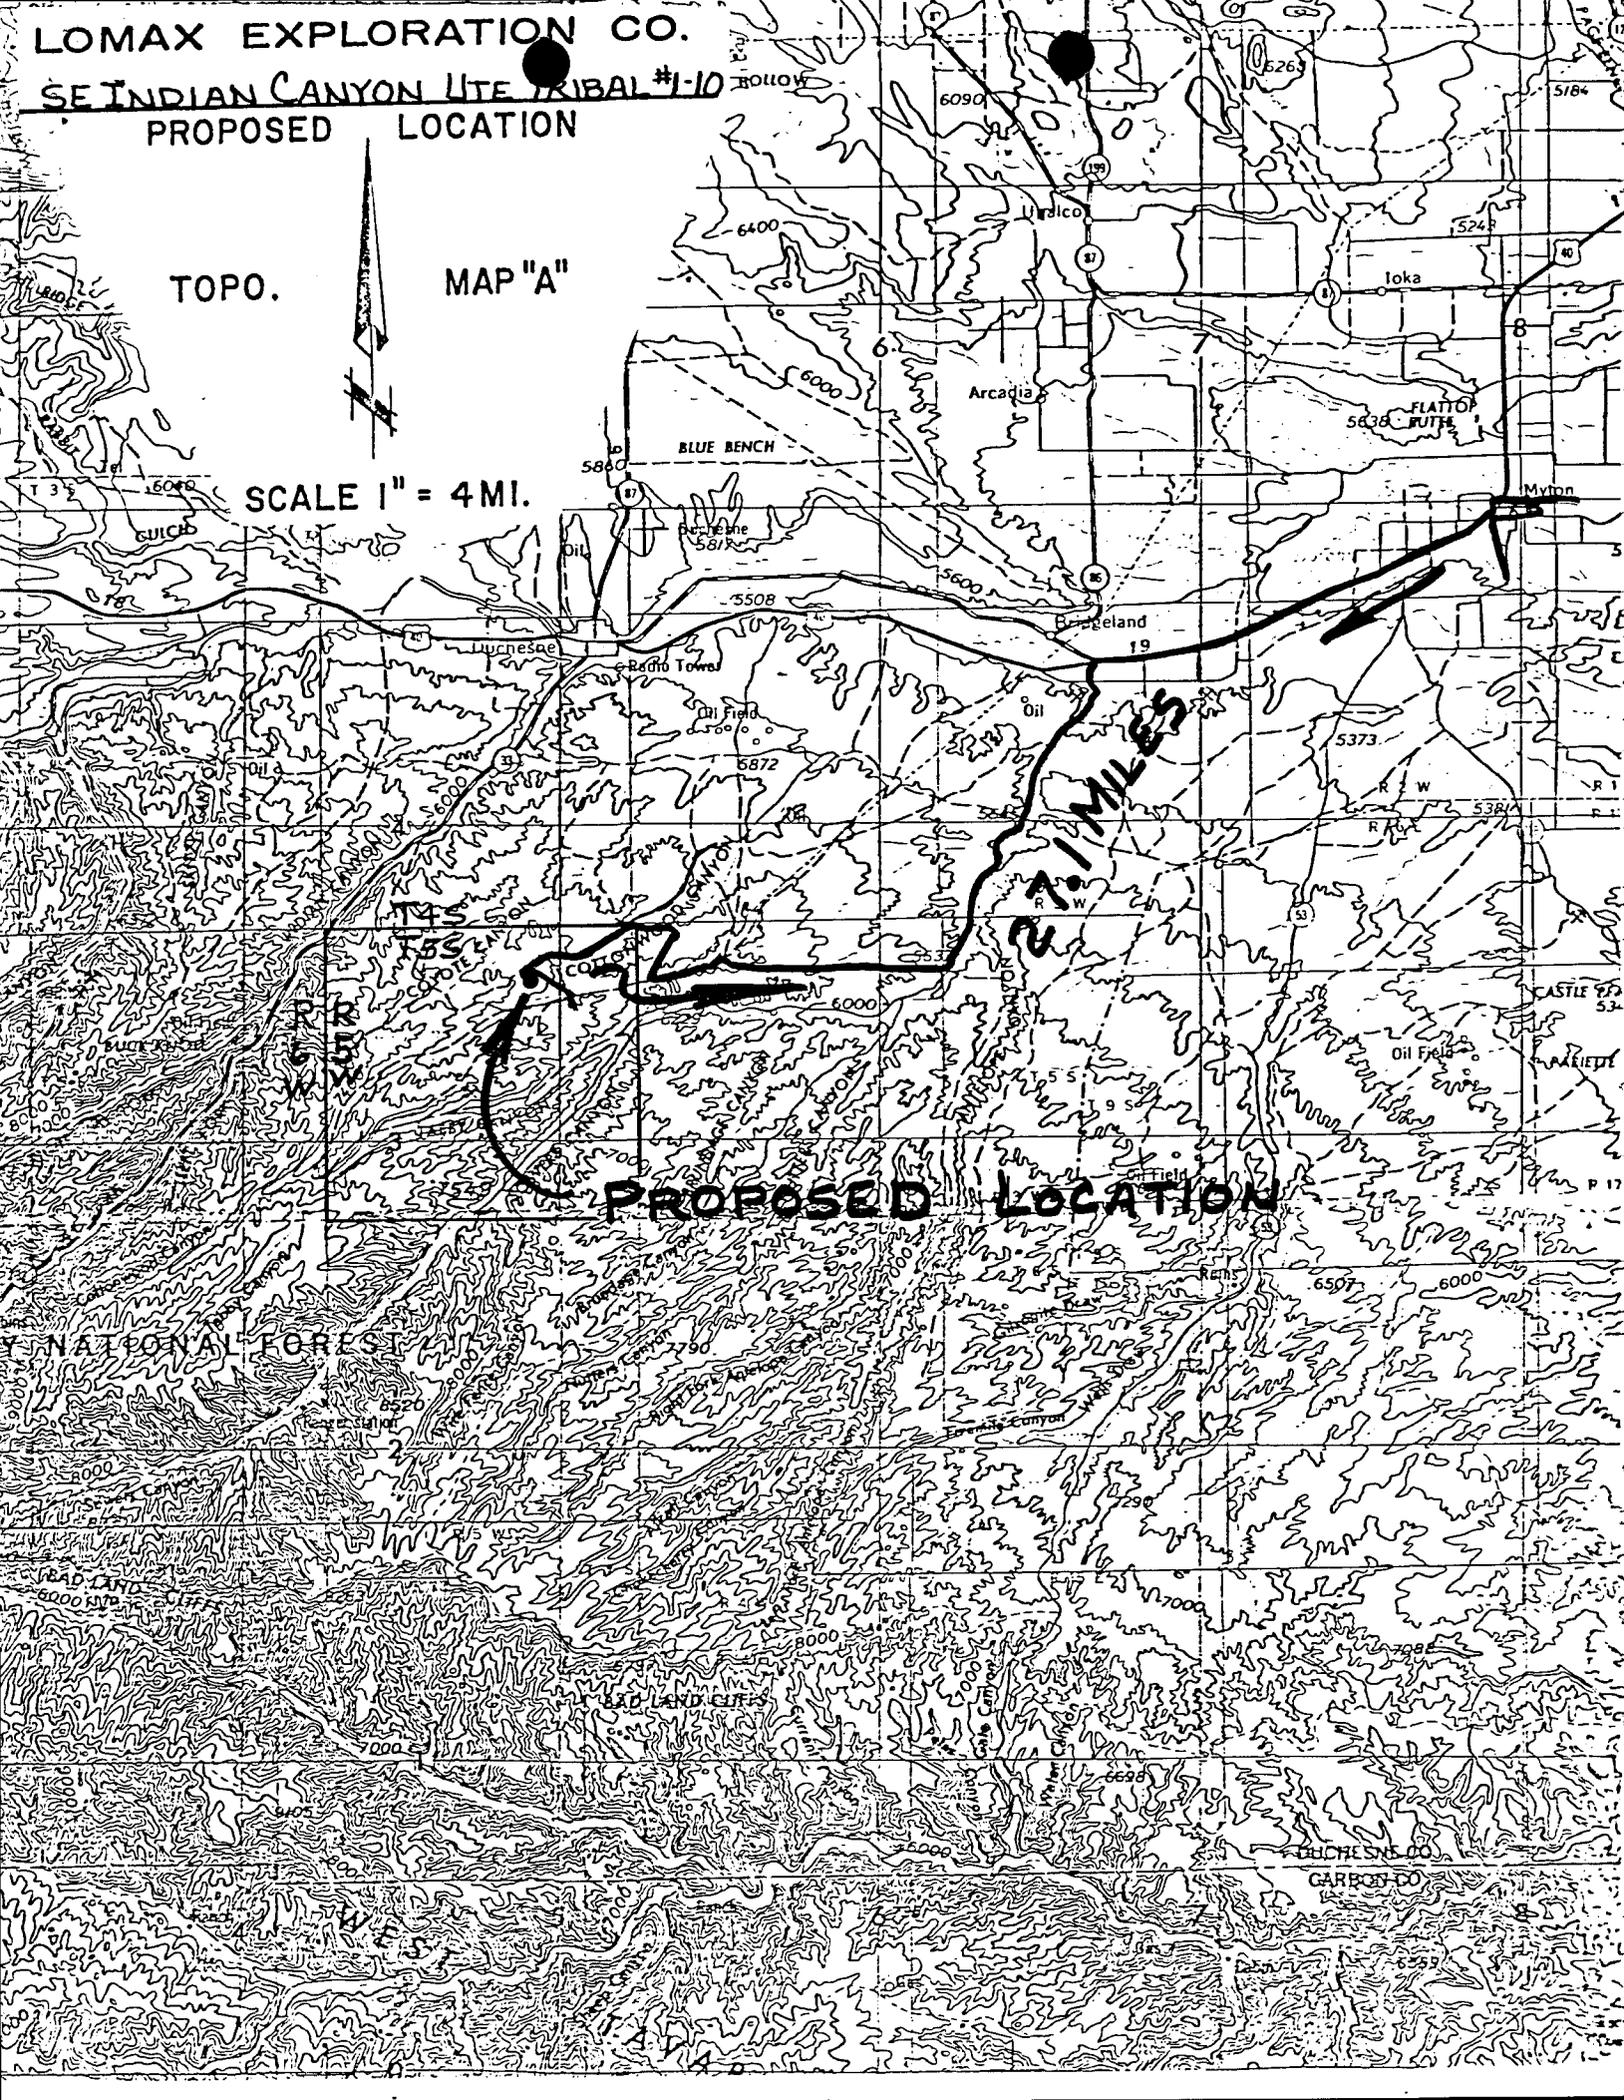

LOMAX EXPLORATION CO.

SE INDIAN CANYON UTE TRIBAL #10

PROPOSED LOCATION

TOPO.


MAP "B"



SCALE 1" = 2000'

ROAD CLASSIFICATION

Light duty road, all weather, improved surface Unimproved road fair or dry weather



QUADRANGLE LOCATION

T4S
T5S


4.7 MILES

PROPOSED ACCESS ROAD 0.3 MI.

MYTON 22.1 MILES

PROPOSED LOCATION
SE INDIAN CANYON UTE TRIBAL #10

RR
54
W W

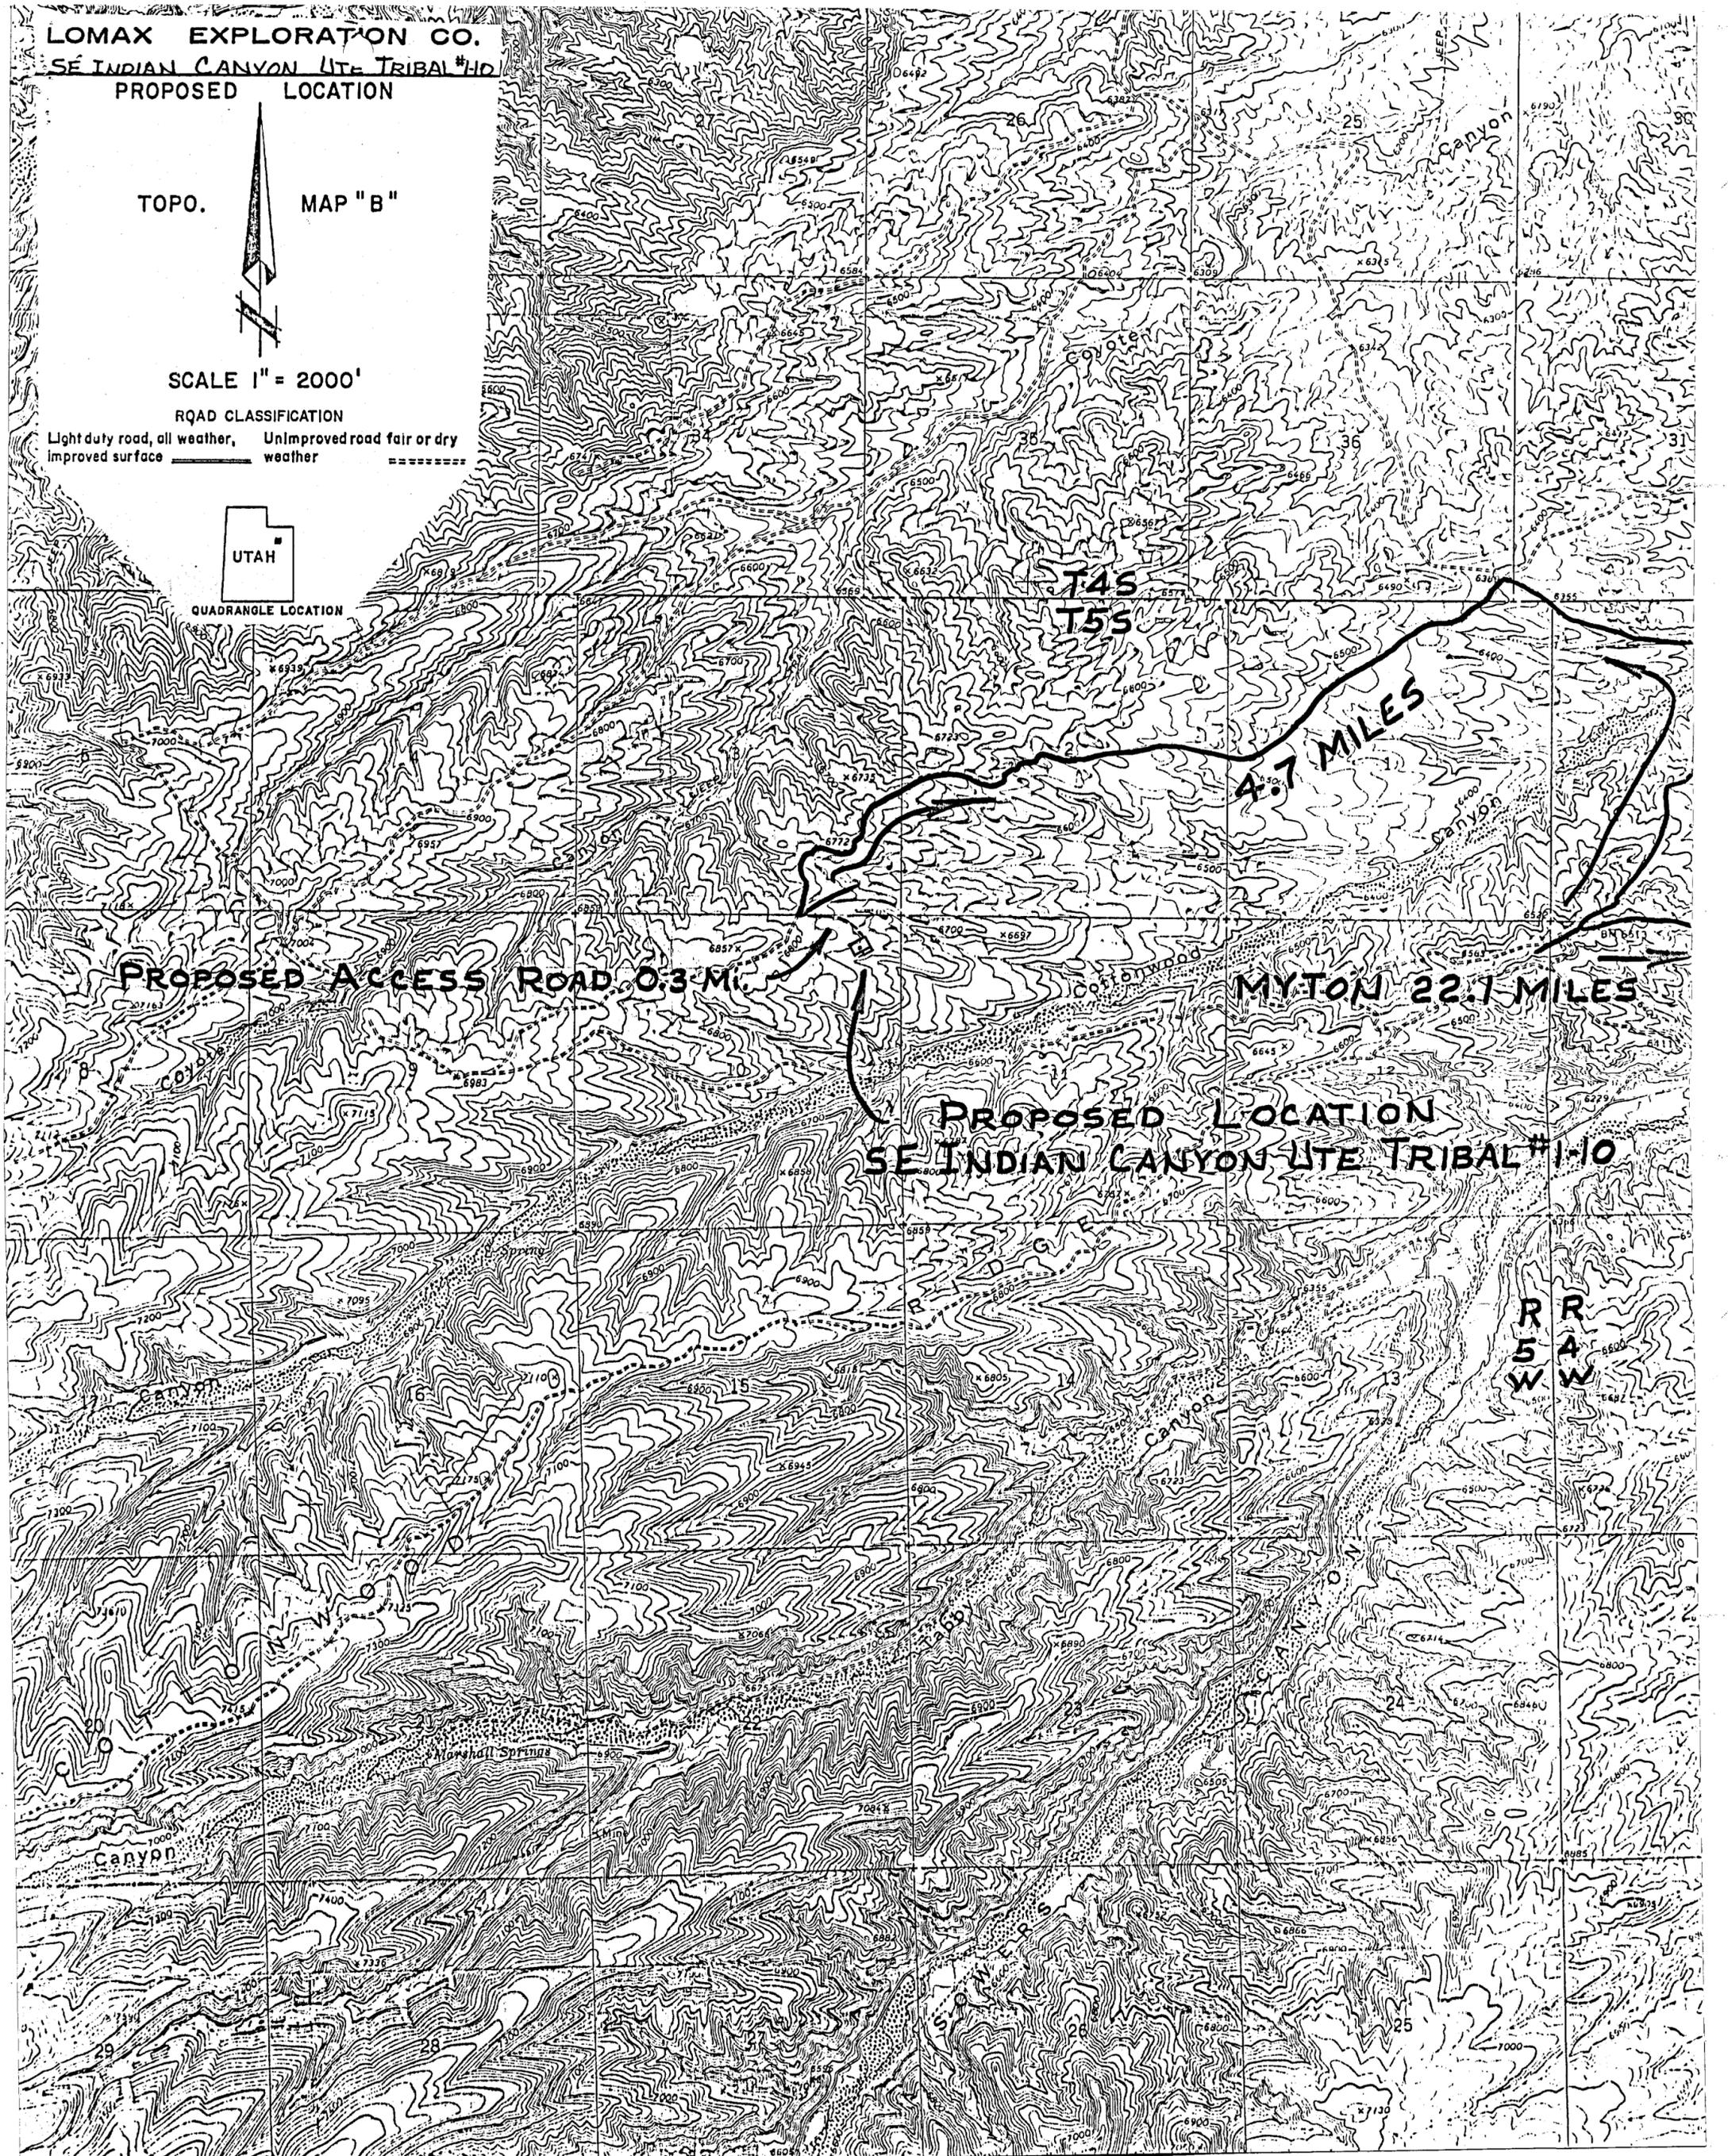

June 8, 1984

State of Utah
Division of Oil & Gas
4241 State Office Building
Salt Lake City, Utah 84114

Re: Temporary Application
No. 84-43-31


Gentlemen,

Enclosed is a copy of the above numbered approved Temporary Application. Lomax Exploration Co. plans to use this water source in the drilling of the following wells in Duchesne County.

Tabby Canyon Ute Tribal	#3-24✓
"	#3-26✓
"	#4-14✓
"	#5-13✓
Brundage Canyon Ute Tribal	#2-11✓
S.E. Indian Canyon Ute Tribal	#1-10✓
"	#1-3✓
Cottonwood Ridge Ute Tribal	#1-18✓
S. Cottonwood Ridge Ute Tribal	#1-20✓
S. Brundage Canyon Ute Tribal	#1-30✓

RECEIVED
JUN 11 1984
DIVISION OF OIL
GAS & MINING

Sincerely,

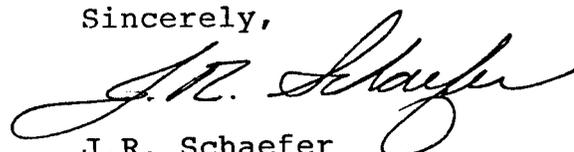

J.R. Schaefer
District Manager

JRS/cc
Enclosures

333 North Belt East • Suite 880 • Houston, Texas 77060 • 713/931-9276
Mailing Address: P.O. Box 4503 • Houston, Texas 77210-4503

District Office: 248 North Union • Roosevelt, Utah 84066
Mailing Address: P.O. Box 1446 • Roosevelt, Utah 84066

Duane Hall Trucking Inc.

ERNAL
780-1578

418 EAST 100 NORTH
VERNAL, UTAH 84078
PSCU 557

ALTAMONT
454-3872
454-3355

Duane Hall Trucking has purchased water rights from me for drilling and completion of oil wells in the Antelope Creek area, thru December 1984.

Signed

R. M. Young

APPLICATION NO. 84-43-31
DISTRIBUTION SYSTEM.....

Application For Temporary Change of Point of Diversion, Place or Purpose of Use

STATE OF UTAH

(To Be Filed in Duplicate)

RECEIVED

JUN 11 1984

DIVISION OF OIL
GAS & MINING
1984

Vernal, Utah

May 30

Place

Date

For the purpose of obtaining permission to temporarily change the point of diversion, place or purpose of use
(Strike out written matter not needed)

of water, the right to the use of which was acquired by Appl. 9013 (43-1643)

(Give No. of application, title and date of Decree and Award No.)

to that hereinafter described, application is hereby made to the State Engineer, based upon the following showing of facts, submitted in accordance with the requirements of the Laws of Utah.

- The owner of right or application is R. W. Young
- The name of the person making this application is Duane Hall Trucking, Inc.
- The post office address of the applicant is 241 North 850 West, Vernal, Utah 84078

PAST USE OF WATER

4. The flow of water which has been used in second feet is 2.0

5. The quantity of water which has been used in acre feet is

6. The water has been used each year from Apr. 1 to Oct. 31, incl.
(Month) (Day) (Month) (Day)

7. The water has been stored each year from to incl.
(Month) (Day) (Month) (Day)

8. The direct source of supply is Sowers Creek in Duchesne County.

9. The water has been diverted into ditch at a point located South 1200 ft. West 330 ft.
from the E 1/4 Cor. Sec. 9, T5S, R4W, USB&M
ditch canal

10. The water involved has been used for the following purpose: IRRIGATION

Total 85.4 acres.

NOTE: If for irrigation, give legal subdivisions of land and total acreage which has been irrigated. If for other purposes, give place and purpose of use.

THE FOLLOWING TEMPORARY CHANGES ARE PROPOSED

11. The flow of water to be changed in cubic feet per second is

12. The quantity of water to be changed in acre-feet is 20.0

13. The water will be diverted into the tank trucks at a point located East 1000 ft. North 1500 ft.
from the SW Cor. Sec. 11, T5S, R4W, USB&M
ditch canal

14. The change will be made from May 30, 19 84, to Dec. 31, 19 84
(Period must not exceed one year)

15. The reasons for the change are Oil well drilling & completion work

16. The water involved herein has heretofore been temporarily changed years prior to this application.

(List years change has been made)

17. The water involved is to be used for the following purpose: Drilling for Lomax -10 wells: Tabby Canyon U.T. 3-26, Tabby Canyon U.T.3-24, Brundage Canyon U.T.2-11, Tabby Canyon U.T.14 Tabby Canyon U.T.5-13, So. East Indian Canyon 1-3, Indian Canyon 1-10, Cottonwood Ridge
Total acres.

NOTE: If for irrigation, give legal subdivisions of land to be irrigated. If for other purposes, give place and purpose of proposed use.

EXPLANATORY

#17 Cont: U.T. 1-18, So. Cottonwood Ridge U.T. 1-20, So. Brundage U.T.1-30

A filing fee in the sum of \$5.00 is submitted herewith. I agree to pay an additional fee for either investigating or advertising this change, or both, upon the request of the State Engineer.

Signature of Applicant

OPERATOR Romex Exploration Co. DATE 6/15/84

WELL NAME S.E. Indian Canyon site Tribal #1-10

SEC NE NE 10 T 55 R 5W COUNTY Duchesne

43-013-30967
API NUMBER

Indian
TYPE OF LEASE

POSTING CHECK OFF:

INDEX

HL

NID

PI

MAP

PROCESSING COMMENTS:

No other wells within 1000'

Water or - 84-43-31

APPROVAL LETTER:

SPACING: A-3 _____ UNIT

c-3-a _____ CAUSE NO. & DATE

c-3-b

c-3-c

SPECIAL LANGUAGE:

RECONCILE WELL NAME AND LOCATION ON APD AGAINST SAME DATA ON PLAT MAP.

AUTHENTICATE LEASE AND OPERATOR INFORMATION

VERIFY ADEQUATE AND PROPER BONDING

AUTHENTICATE IF SITE IS IN A NAMED FIELD, ETC.

APPLY SPACING CONSIDERATION

ORDER _____

UNIT _____

c-3-b

c-3-c

CHECK DISTANCE TO NEAREST WELL.

CHECK OUTSTANDING OR OVERDUE REPORTS FOR OPERATOR'S OTHER WELLS.

IF POTASH DESIGNATED AREA, SPECIAL LANGUAGE ON APPROVAL LETTER

IF IN OIL SHALE DESIGNATED AREA, SPECIAL APPROVAL LANGUAGE.

June 18, 1984

Lomax Exploration Company
P. O. Box 4503
Houston, Texas 77210

RE: Well No. S. E. Indian Canyon
Ute Tribal #1-10
NE1/4 Sec. 10, T. 5S, R. 5W
Duchesne County, Utah

Gentlemen:


Approval to drill the above referenced oil well is hereby granted in accordance with Rule C-3 (b), General Rules and Regulations and Rules of Practice and Procedure.

In addition, the following actions are necessary to fully comply with this approval:

1. Spudding notification to the Division within 24 hours after drilling operations commence.
2. Submittal to the Division of completed Form OGC-8-X, Report of Water Encountered During Drilling.
3. Prompt notification to the Division should you determine that it is necessary to plug and abandon this well. Notify John R. Baza, Petroleum Engineer, (Office) (801) 533-5771, (Home) 298-7695 or R. J. Firth, Associate Director, (Home) 571-6068.
4. Compliance with the requirements and regulations of Rule C-27, Associated Gas Flaring, General Rules and Regulations, Oil and Gas Conservation.
5. This approval shall expire one (1) year after date of issuance unless substantial and continuous operation is underway or an application for an extension is made prior to the approval expiration date.

The API number assigned to this well is 43-013-30967.

Sincerely,

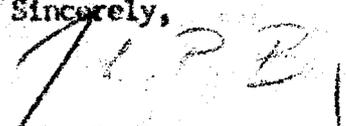
John R. Baza
Petroleum Engineer

RJF/as

cc: Branch of Fluid Minerals

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

5. LEASE DESIGNATION AND SERIAL NO.
BIA-14-20-H62-3421

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
S.E. Indian Canyon Ute Triba

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

9. WELL NO.
#1-10

10. FIELD AND POOL, OR WILDCAT
Wildcat

11. SEC., T., R., M., OR BLK.
AND SURVEY OR AREA
Sec 10, T5S, R5W

12. COUNTY OR PARISH
Duchesne

13. STATE
Utah

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK
DRILL DEEPEN PLUG BACK

b. TYPE OF WELL
OIL WELL GAS WELL OTHER
SINGLE ZONE MULTIPLE ZONE

2. NAME OF OPERATOR
Lomax Exploration Company

3. ADDRESS OF OPERATOR
P.O. Box 4503, Houston, Texas 77210

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)
At surface
509' FNL & 671' FEL NE/NE
At proposed prod. zone

RECEIVED
DEC 06 1984
DIVISION OF
OIL, GAS & MINING

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE
27 miles SW of Myton, Utah

15. DISTANCE FROM PROPOSED*
LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT.
(Also to nearest drlg. unit line, if any)
509'

16. NO. OF ACRES IN LEASE
640

17. NO. OF ACRES ASSIGNED
TO THIS WELL
40

18. DISTANCE FROM PROPOSED LOCATION*
TO NEAREST WELL, DRILLING, COMPLETED,
OR APPLIED FOR, ON THIS LEASE, FT.
NA

19. PROPOSED DEPTH
6200'

20. ROTARY OR CABLE TOOLS
Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)
6763' GR

22. APPROX. DATE WORK WILL START*
September, 1984

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4"	8 5/8"	24#	300'	To Surface
7 7/8"	5 1/2"	17#	TD	As Required



IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED G.L. Pruitt TITLE V.P., Drilling & Production DATE June 6, 1984

(This space for Federal or State office use)

PERMIT NO. _____ APPROVAL DATE _____

APPROVED BY [Signature] TITLE DISTRICT MANAGER DATE 12-4-84

CONDITIONS OF APPROVAL, IF ANY

State O & M
UT-080-4-M-137

*See Instructions On Reverse Side

CONDITIONS OF APPROVAL FOR NOTICE TO DRILL
WITHIN THE UINTAH OURAY RESERVATION

Company Lomax Exploration Co. Well No. 1-10
Location Sec. 10 T5S R5W Lease No. BIA 14-20-H62-3421
Onsite Inspection Date 08-01-84

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas Order No. 1, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

A. DRILLING PROGRAM

All fresh water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

1. Pressure Control Equipment

BOP and choke manifold systems will be consistent with API RP 53. Pressure tests will be conducted before drilling out from under all casing strings which are set and cemented in place. Blowout preventer controls will be installed prior to drilling the surface casing plug and will remain in use until the well is completed or abandoned. Preventers will be inspected and operated at least daily to ensure good mechanical working order, and this inspection recorded on the daily drilling report. Preventers will be pressure tested before drilling casing cement plugs.

10" Series 900 Hydril Bag-type 30P will be pressure tested to a minimum pressure of 1,500 psi. 10" Double Ram Hydraulic BOP will be pressure tested to a minimum pressure of 2,100 psi.

The District Office should be notified, with sufficient lead time, in order to have a BLM representative on location during pressure testing.

2. Casing Program and Auxiliary Equipment

The District Office should be notified, with sufficient lead time, in order to have a BLM representative on location while running all casing strings and cementing.

Cement top for the long string will be at least 50 feet above the top of the Mahogany oil shale.

3. Mud Program and Circulating Medium

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

4. Coring, Logging and Testing Program

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the authorized officer (AO).

5. Anticipated Starting Dates and Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

The spud date will be reported orally to the AO within 48 hours after spudding. If the spudding occurs on a weekend or holiday, the report will be submitted on the following regular work day. The oral report will be followed up with a Sundry Notice.

In accordance with Onshore Oil and Gas Order No. 1, this well will be reported on Form 3160-5 "Monthly Report of Operations", starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report will be filed, in duplicate, to the Vernal BLM District Office, 170 South 500 East, Vernal, Utah 84073.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status.

Such notification will be sent by telegram or other written communication, not later than 5 days following the date on which the well is placed on production.

Pursuant to NTL-2B, with the approval of the District Engineer, produced water may be temporarily disposed of into unlined pits for a period of up to 90 days. During the period so authorized, an application for approval of the permanent disposal method, along with the required water analysis and other information, must be submitted to the District Engineer.

Pursuant to NTL-4A, lessees or operators are authorized to vent/flare gas during initial well evaluation tests, not exceeding a period of 30 days or the production of 50 MMCF of gas, whichever occurs first. An application must be filed with the District Engineer and approval received, for any venting/flaring of gas beyond the initial 30 day or authorized test period.

A schematic facilities diagram as required by 43 CFR 3162.7-2, 3162.7-3, and 3162.7-4 shall be submitted to the appropriate District Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in 43 CFR 3162.7 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-4.

A first production conference will be scheduled within 15 days after receipt of the first production notice.

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within 30 days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

Pursuant to Onshore Oil and Gas Order No. 1, lessees and operators have the responsibility to see that their exploration, development, production, and construction operations are conducted in a manner which conforms with applicable Federal laws and regulations and with State and local laws and regulations to the extent that such State and local laws are applicable to operations on Federal or Indian lands.

B. THIRTEEN POINT SURFACE USE PLAN

1. Planned Access Roads

- a. Width: 30' right-of-way.

All travel will be confined to existing access road rights-of-way.

2. Location of Tank Batteries and Production Facilities

All permanent (on site for six months or longer) structures constructed or installed (including oil well pumpjacks) will be painted a flat, non-reflective, earthtone color to match the standard environmental colors, as determined by the Rocky Mountain 5 State Interagency Committee. All facilities will be painted within 6 months of installation. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

If a tank battery is constructed on this lease, it will be surrounded by a dike of sufficient capacity to contain 1-1/2 times the storage capacity of the battery.

Tank batteries will be placed on the northwest corner of the location.

All loading lines will be placed inside the berm surrounding the tank battery.

All site security guidelines identified in 43 CFR 3162.7 regulations will be adhered to.

All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the AO.

Gas meter runs for each well will be located within 500 feet of the wellhead. The gas flowline will be buried from the wellhead to the meter and 500 feet downstream of the meter run or any production facilities. Meter runs will be housed and/or fenced.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries. Tests for meter accuracy will be conducted monthly for the first three months on new meter installations and at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with the API standards for liquid hydrocarbons and the AGA standard for natural gas measurement.

3. If fill materials are needed to construct roads and well sites, proper permits will be obtained. A copy of the permit needed to obtain water will be attached to the application if water is to be used for the drilling. Information for permits will include: (a) the approximate amount of water or materials needed, (b) location and ownership of the water rights or materials to be used, and (c) the approximate amount of time the water or materials will be required.

4. Methods of Handling Waste Disposal

Storage tanks will be used if drill sites are located on tribal irrigable land or on lands under crop production. All reserve pits will be lined with clay.

Burning will not be allowed. All trash must be contained and disposed of by a trash cage and hauled to an approved sanitary landfill.

Produced waste water will be confined to a lined pit for a period not to exceed 90 days after initial production. During the 90 day period, an application for approval of a permanent disposal method and location, along with required water analysis, will be submitted for the AO's approval. Failure to file an application within the time allowed will be considered an incident of noncompliance, and will be grounds for issuing a shut-in order.

5. Well Site Layout

The reserve pit will be located on the southwest corner of the location.

The stockpiled topsoil will be stored between points 2 and 8.

Access to the well pad will be from the north side of the location.

Reserve pits will be fenced with a wire mesh fence and topped with at least one strand of barbed wire.

6. Plans for Restoration of Surface

Immediately upon completion of drilling, the location and surrounding area will be cleared of all debris, materials, trash and junk not required for production.

Before any dirt work to restore the location takes place, the reserve pit must be completely dry and all cans, barrels, pipe, etc. will be removed.

Prior to reseeding, all disturbed areas, including the access roads, will be scarified and left with a rough surface.

Seed will be broadcast or drilled at a time specified by the DWR. If broadcast, a harrow or some other implement will be dragged over the seeded area to assure seed coverage.

The seed mixture will be determined by DWR at the time of restoration.

Abandoned well sites, roads, or other disturbed areas will be restored to near their original condition. This procedure will include: (a) reestablishing irrigation systems where applicable, (b) reestablishing soil conditions in irrigated fields in such a way as to insure cultivation and harvesting of crops, and (c) insuring revegetation of the disturbed areas to the specifications of the Ute Indian Tribe or the BIA at the time of abandonment.

The operator will submit a plan of controlling noxious weeds along rights-of-way for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds can be obtained from the appropriate county extension office.

7. Surface and Mineral Ownership

Tribal minerals-State surface.

8. Other Information

Rotate location 90 degrees clockwise and move 40' south.

All trees over 4" will be cut into 4' lengths and stacked.

Lomax must have a right-of-way from DWR before surface work begins.

There will be no deviation from the proposed drilling and/or work-over program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3164.

The dirt contractor will be provided with an approved copy of the surface use plan.

A cultural resource clearance will be required before any construction begins. If any cultural resources are found during construction, all work will stop and the AO will be notified.

This permit will be valid for a period of one year from the date of approval. After permit termination, a new application will be filed for approval for any future operations.

9. Lessee's or Operators Representative and Certification

Operator employees, including subcontractors, will not carry firearms or other weapons that may be used to kill game animals.

Operator employees, including subcontractors, will be confined to established roads and well sites. The purpose of this is to prevent soil erosion, and to prevent harassment of game animals or livestock with off-road vehicles such as snowmobiles, motorcycles, or 4-wheel drives.

All roads constructed by operators on the Uintah and Ouray Indian Reservation will have appropriate signs. Signs will be neat and of sound construction. They will state: (a) that the land is owned by the Ute Indian Tribe, (b) the name of the operator, (c) that firearms are prohibited to all non-Ute Tribal members, (d) that permits must be obtained from the B.I.A. before cutting firewood or other timber products and (e) only authorized personnel permitted.

A bench mark will be established near each well site at a location where it will not be destroyed. The bench mark will be a brass cap set in concrete. The brass cap will show the well number and elevation to the nearest one-tenth of a foot. The cuts and fills diagram for the well site will show elevations in relation to the bench mark.

Bureau of Land Management
Vernal District Office
170 South 500 East
Vernal, Utah 84078

RECEIVED

DEC 20 1985

DIVISION OF OIL
GAS & MINERALS

3162.35
U-820
14-20-H62-3421

December 18, 1985

Lomax Exploration Company
50 West Broadway #1200
Salt Lake City, UT 84101

RE: Rescind Application for Permit to Drill
Well No. 1-10
Section 10, T5S, R5W
Duchesne County, Utah
Lease No. 14-20-H62-3421

The Application for Permit to Drill the referenced well was approved on December 4, 1984. Since that date, no known activity has transpired at the approved location. Under current District policy, Applications for Permit to Drill are effective for a period of one year. In view of the foregoing, this office is rescinding the approval of the referenced application without prejudice. If you intend to drill at this location at a future date, a new Application for Permit to Drill must be submitted.

This office requires a letter confirming that no surface disturbance has been made for this drill site. Any surface disturbance associated with the approved location of this well is to be rehabilitated. A schedule for this rehabilitation must be submitted to this office. Your cooperation in this matter is appreciated.

Sincerely,

Craig H. Hansen
ADM for Minerals

sh

bcc: State Div. O G & M
well file
U-922/943
BIA
Jim Snaefffer

RECEIVED

DEC 24 1985

DIVISION OF OIL
GAS & MINING

Lomax



December 20, 1985

Bureau of Land Management
170 South 5 East
Vernal, Utah 84078

Re: Rescind Application for
Permit to Drill

Gentlemen,

This letter is to confirm that no surface disturbance has been made at any of the following locations:

Well No. 9-4
Section 4, T5S, R4W
Duchesne County, Utah
Lease No. 14-20-H62-3524

Well No. 1-3
Section 3, T5S, R5W
Duchesne County, Utah
Lease No. 14-20-H62-3420

Well No. 3-10
Section 10, T5S, R4W
Duchesne County, Utah
Lease No. 14-20-H62-3526

Well No. 1-10
Section 10, T5S, R5W
Duchesne County, Utah
Lease No. 14-20-H62-3421

Sincerely,

Cheryl Cameron
Secretary, Drilling & Completion

cc: State of Utah
Natural Resources
Oil, Gas & Mining
355 W. North Temple
3 Triad Center, Suite 350
Salt Lake City, Utah 84180-1203



STATE OF UTAH
NATURAL RESOURCES
Oil, Gas & Mining

Norman H. Bangerter, Governor
Dee C. Hansen, Executive Director
Dianne R. Nielson, Ph.D., Division Director

355 W. North Temple • 3 Triad Center • Suite 350 • Salt Lake City, UT 84180-1203 • 801-538-5340

March 20, 1986

Lomax Exploration Company
P O Box 4503
Houston, Texas 77210-4503

Gentlemen:

Re: Well No. S.E. Indian Canyon Ute #1-10 - Sec. 10, T. 5S, R. 5W,
Duchesne County, Utah - API #43-013-30967

In concert with action taken by the Bureau of Land Management, December 16, 1985, approval to drill the above referenced well is hereby rescinded.

A new "Application for Permit to Drill" must be filed with this office, for approval, prior to future drilling of the subject location.

Sincerely,


John R. Baza
Petroleum Engineer

ta
cc: Dianne R. Nielson
Ronald J. Firth
File

0381S/4