

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL		1. WELL NAME and NUMBER GMBU 125-36-8-16
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>		3. FIELD OR WILDCAT MONUMENT BUTTE
4. TYPE OF WELL Oil Well Coalbed Methane Well: NO		5. UNIT or COMMUNITIZATION AGREEMENT NAME GMBU (GRRV)
6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY		7. OPERATOR PHONE 435 646-4825
8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Myton, UT, 84052		9. OPERATOR E-MAIL mcrozier@newfield.com
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) ML-22061	11. MINERAL OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>	12. SURFACE OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
13. NAME OF SURFACE OWNER (if box 12 = 'fee')		14. SURFACE OWNER PHONE (if box 12 = 'fee')
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')		16. SURFACE OWNER E-MAIL (if box 12 = 'fee')
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')	18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>	19. SLANT VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>

20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN
LOCATION AT SURFACE	672 FSL 818 FEL	SESE	36	8.0 S	16.0 E	S
Top of Uppermost Producing Zone	1095 FSL 771 FEL	SESE	36	8.0 S	16.0 E	S
At Total Depth	1439 FSL 721 FEL	NESE	36	8.0 S	16.0 E	S

21. COUNTY DUCHEсне	22. DISTANCE TO NEAREST LEASE LINE (Feet) 721	23. NUMBER OF ACRES IN DRILLING UNIT 10
25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 611	26. PROPOSED DEPTH MD: 6178 TVD: 6122	
27. ELEVATION - GROUND LEVEL 5334	28. BOND NUMBER B001834	29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 437478

Hole, Casing, and Cement Information

String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement	Sacks	Yield	Weight
SURF	12.25	8.625	0 - 700	24.0	J-55 ST&C	8.3	Class G	321	1.17	15.8
PROD	7.875	5.5	0 - 6178	15.5	J-55 LT&C	8.3	Premium Lite High Strength	289	3.26	11.0
							50/50 Poz	363	1.24	14.3

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)	<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)	<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP

NAME Mandie Crozier	TITLE Regulatory Tech	PHONE 435 646-4825
SIGNATURE	DATE 01/16/2014	EMAIL mcrozier@newfield.com
API NUMBER ASSIGNED 43013527800000	APPROVAL  Permit Manager	

NEWFIELD PRODUCTION COMPANY
 GMBU 125-36-8-16
 AT SURFACE: SE/SE SECTION 36, T8S R16E
 DUCHESNE COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0' – 1,540'
Green River	1,540'
Wasatch	6,270'
Proposed TD	6,178'(MD) 6,122' (TVD)

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil) 1,540' – 6,270'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO ₃) (mg/l)
Dissolved Bicarbonate (NaHCO ₃) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO ₄) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. Casing Design: GMBU 125-36-8-16

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	700'	24.0	J-55	STC	2,950 7.51	1,370 6.15	244,000 14.52
Prod casing 5-1/2"	0'	6,178'	15.5	J-55	LTC	4,810 2.45	4,040 2.06	217,000 2.27

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe =	13.0 ppg
Pore pressure at surface casing shoe =	8.33 ppg
Pore pressure at prod casing shoe =	8.33 ppg
Gas gradient =	0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. Cementing Design: GMBU 125-36-8-16

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft ³ /sk)
			ft ³			
Surface casing	700'	Class G w/ 2% CaCl	321	30%	15.8	1.17
			376			
Prod casing Lead	4,178'	Prem Lite II w/ 10% gel + 3% KCl	289	30%	11.0	3.26
			941			
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363	30%	14.3	1.24
			451			

*Actual volume pumped will be 15% over the caliper log

- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours

- Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ± 700 feet will be drilled with an air/mist system. The air rig is equipped with a 6 1/2" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ± 700 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 700' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated


bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the second quarter of 2014, and take approximately seven (7) days from spud to rig release.


T8S, R16E, S.L.B.&M.

NEWFIELD EXPLORATION COMPANY

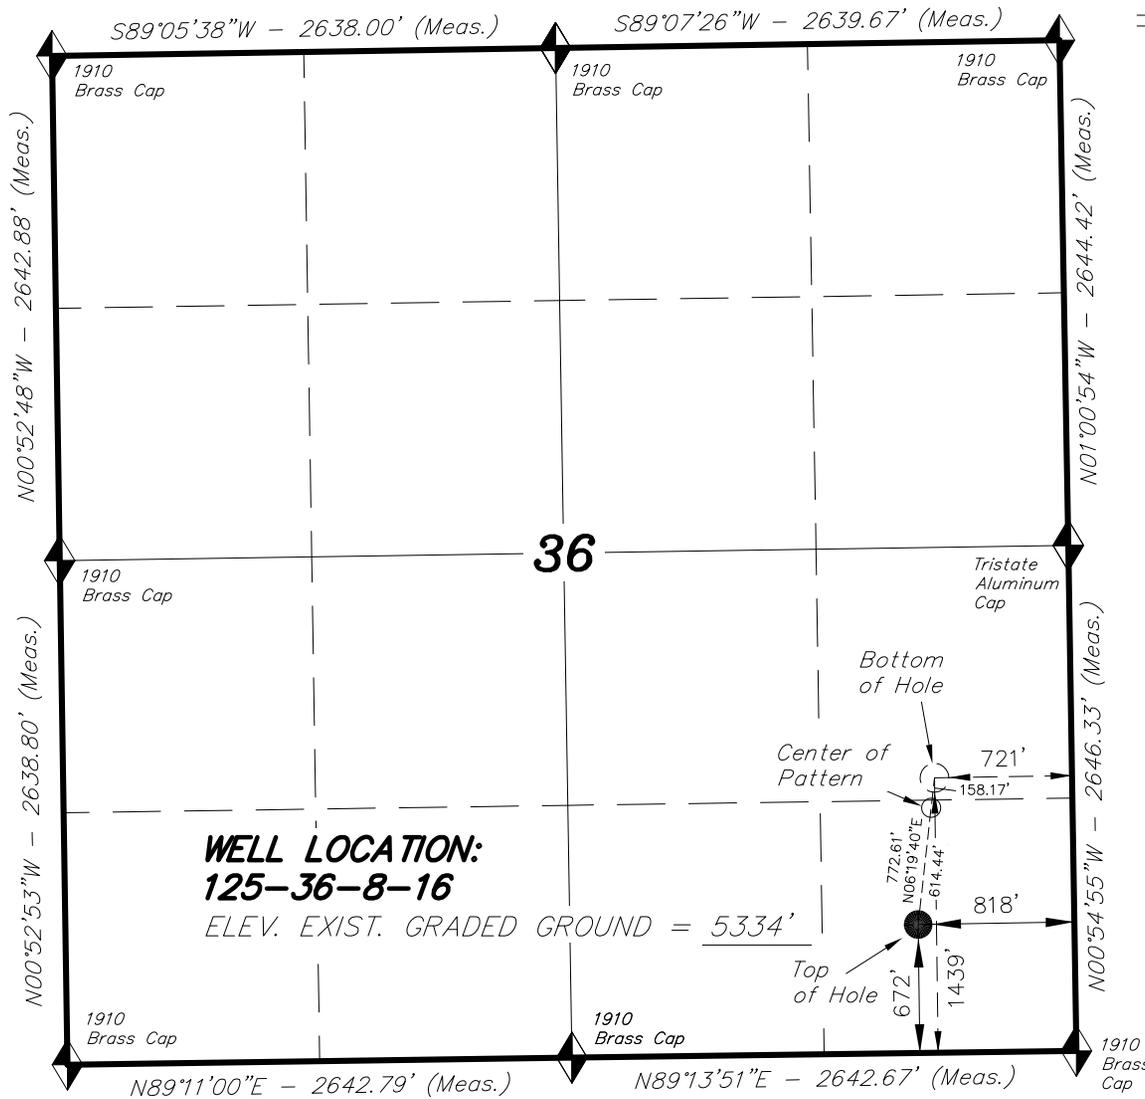

WELL LOCATION, 125-36-8-16,
 LOCATED AS SHOWN IN THE SE 1/4
 SE 1/4 OF SECTION 36, T8S, R16E,
 S.L.B.&M. DUCHESNE COUNTY, UTAH.


TARGET BOTTOM HOLE, 125-36-8-16,
 LOCATED AS SHOWN IN THE NE 1/4
 SE 1/4 OF SECTION 36, T8S, R16E,
 S.L.B.&M. DUCHESNE COUNTY, UTAH.

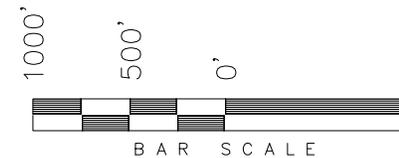

NOTES:

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.
3. The Center of Pattern footages are 1282' FSL & 738' FEL.

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

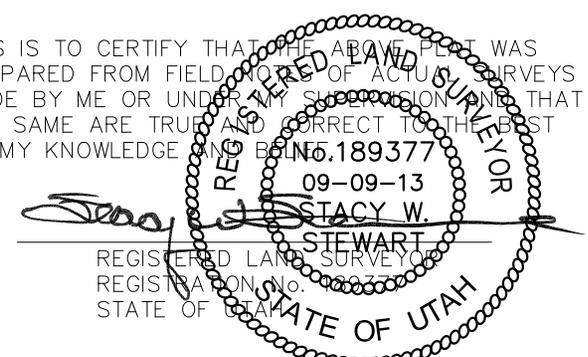

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV.; Elevations are based on an N.G.S. OPUS Correction. LOCATION: LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'


NAD 83 (SURFACE LOCATION)	
LATITUDE = 40°04'08.24"	
LONGITUDE = 110°03'40.55"	
NAD 27 (SURFACE LOCATION)	
LATITUDE = 40°04'08.38"	
LONGITUDE = 110°03'38.01"	
NAD 83 (CENTER OF PATTERN)	NAD 83 (BOTTOM HOLE LOCATION)
LATITUDE = 40°04'14.27"	LATITUDE = 40°04'15.82"
LONGITUDE = 110°03'39.56"	LONGITUDE = 110°03'39.30"
NAD 27 (CENTER OF PATTERN)	NAD 27 (BOTTOM HOLE LOCATION)
LATITUDE = 40°04'14.40"	LATITUDE = 40°04'15.95"
LONGITUDE = 110°03'37.01"	LONGITUDE = 110°03'36.76"

TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
 (435) 781-2501

DATE SURVEYED: 07-29-13	SURVEYED BY: G.D.O.	VERSION:
DATE DRAWN: 09-09-13	DRAWN BY: F.T.M.	V2
REVISED:	SCALE: 1" = 1000'	

Access Road Map

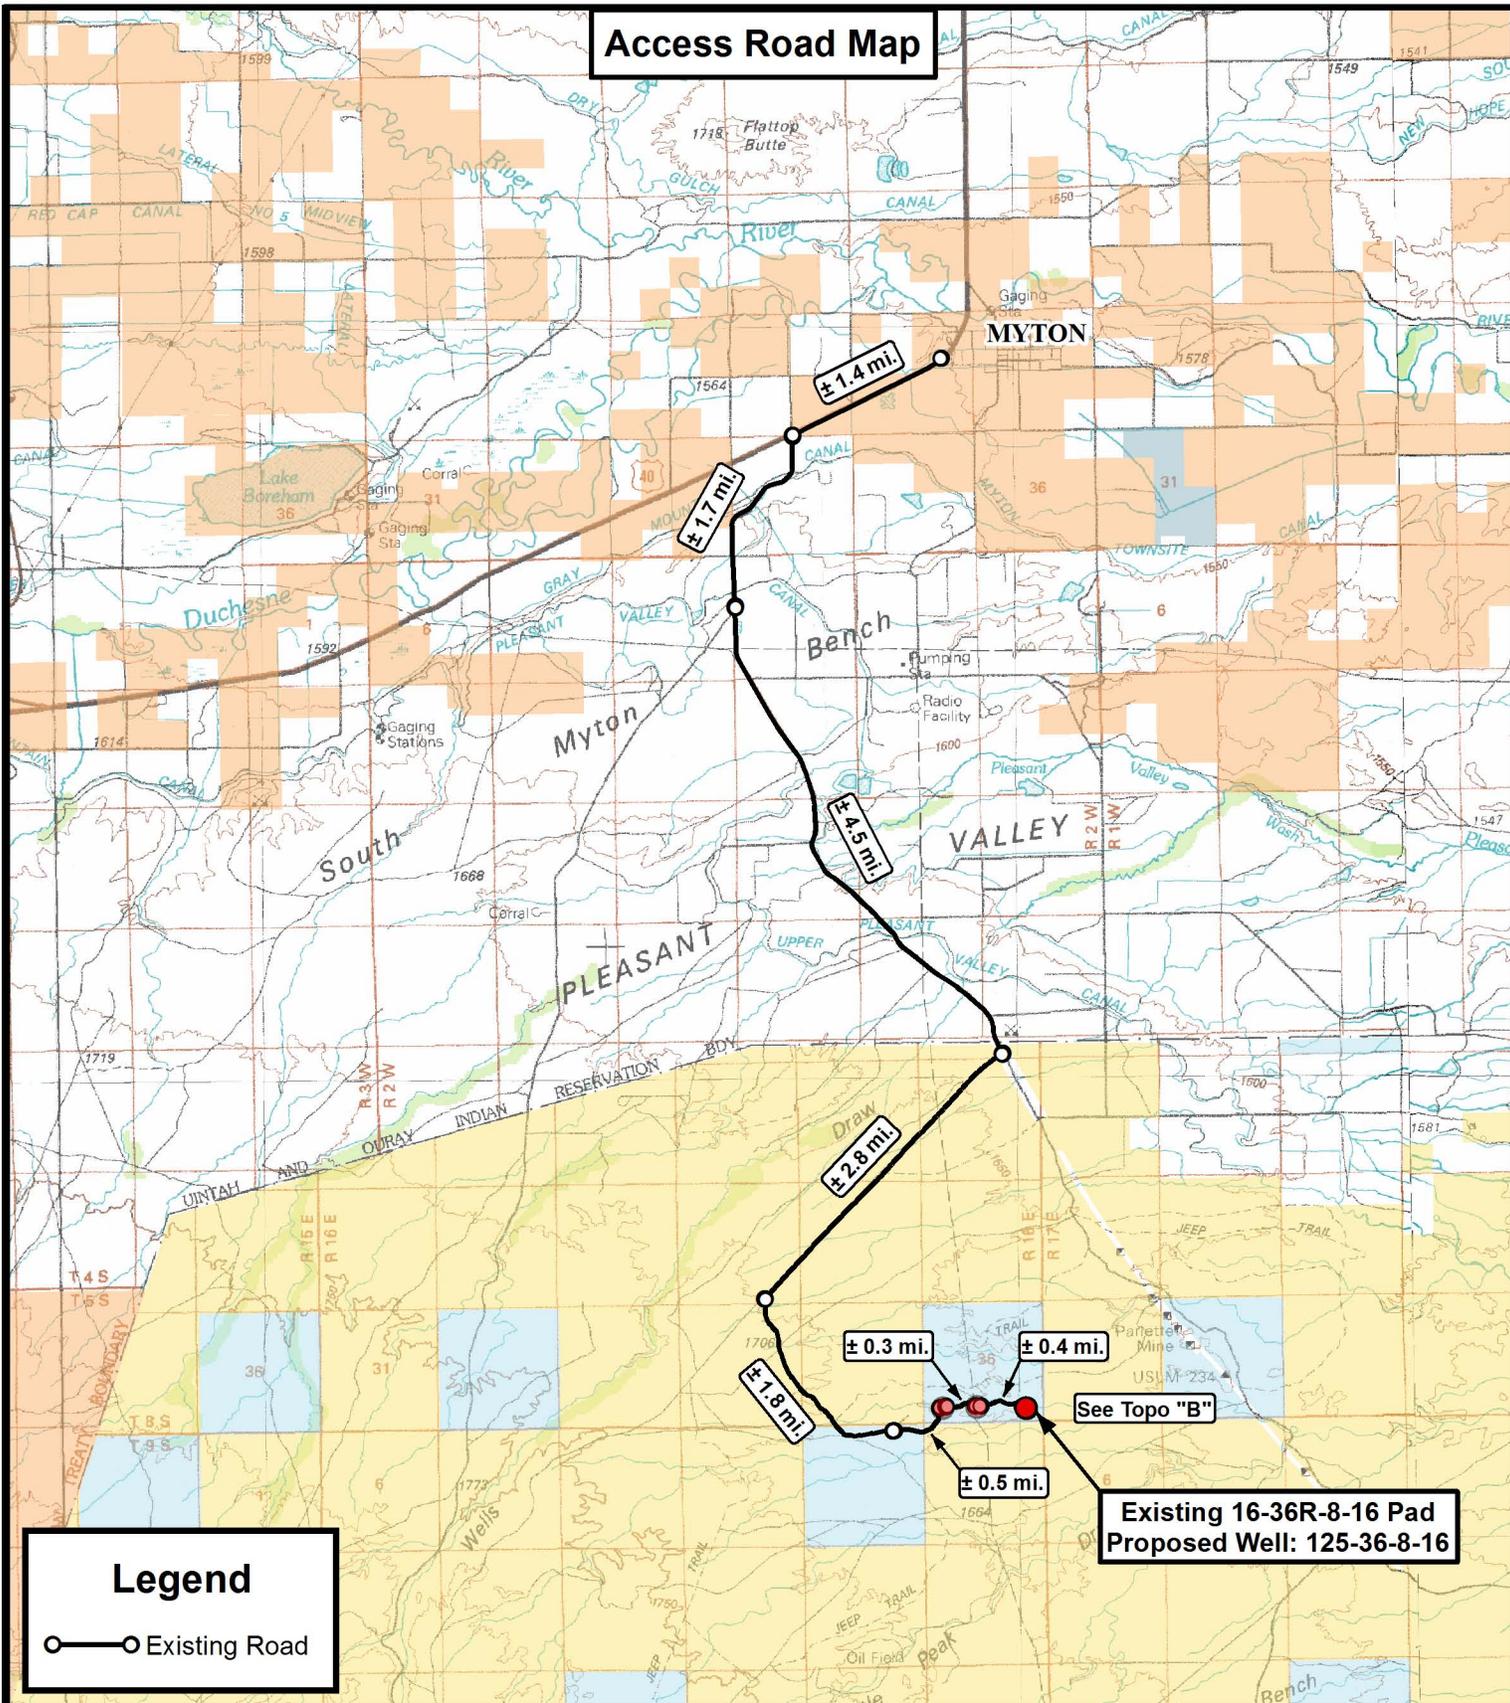

Legend

○—○ Existing Road

Existing 16-36R-8-16 Pad
Proposed Well: 125-36-8-16

Tri State Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY


Existing 16-36R-8-16 Pad
Proposed Well: 125-36-8-16
Sec. 36, T8S, R16E, S.L.B.&M.
Duchesne County, UT.

DRAWN BY:	A.P.C.	REVISED:	VERSION:
DATE:	09-09-2013		V2
SCALE:	1:100,000		

TOPOGRAPHIC MAP

SHEET
A

Access Road Map

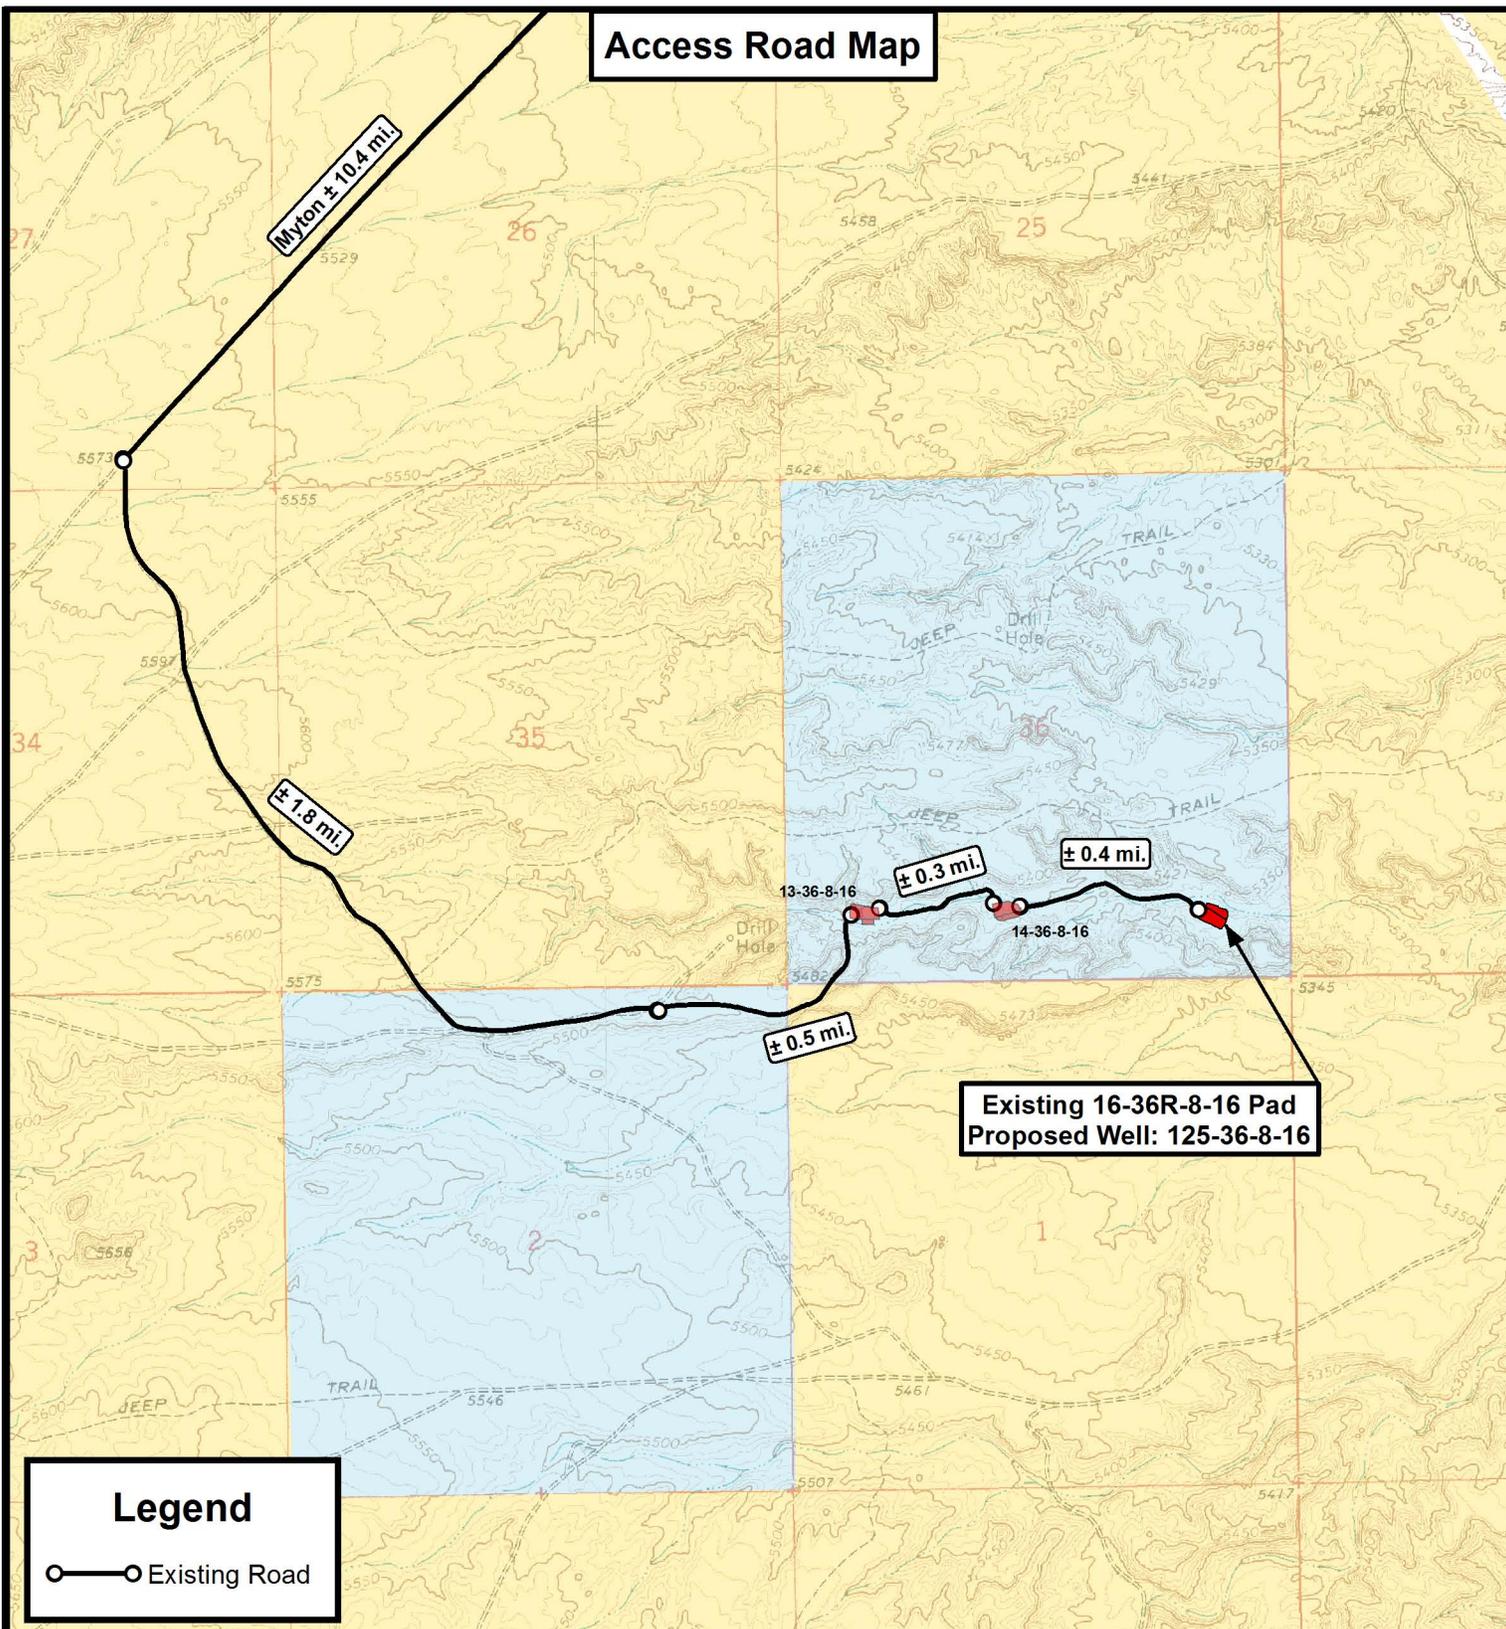

Legend

○—○ Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
 F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY


Existing 16-36R-8-16 Pad
 Proposed Well: 125-36-8-16
 Sec. 36, T8S, R16E, S.L.B.&M.
 Duchesne County, UT.

DRAWN BY:	A.P.C.	REVISED:	09-09-13 A.P.C.	VERSION:
DATE:	08-14-2013			V2
SCALE:	1" = 2,000'			

TOPOGRAPHIC MAP

SHEET
B

Proposed Pipeline Map

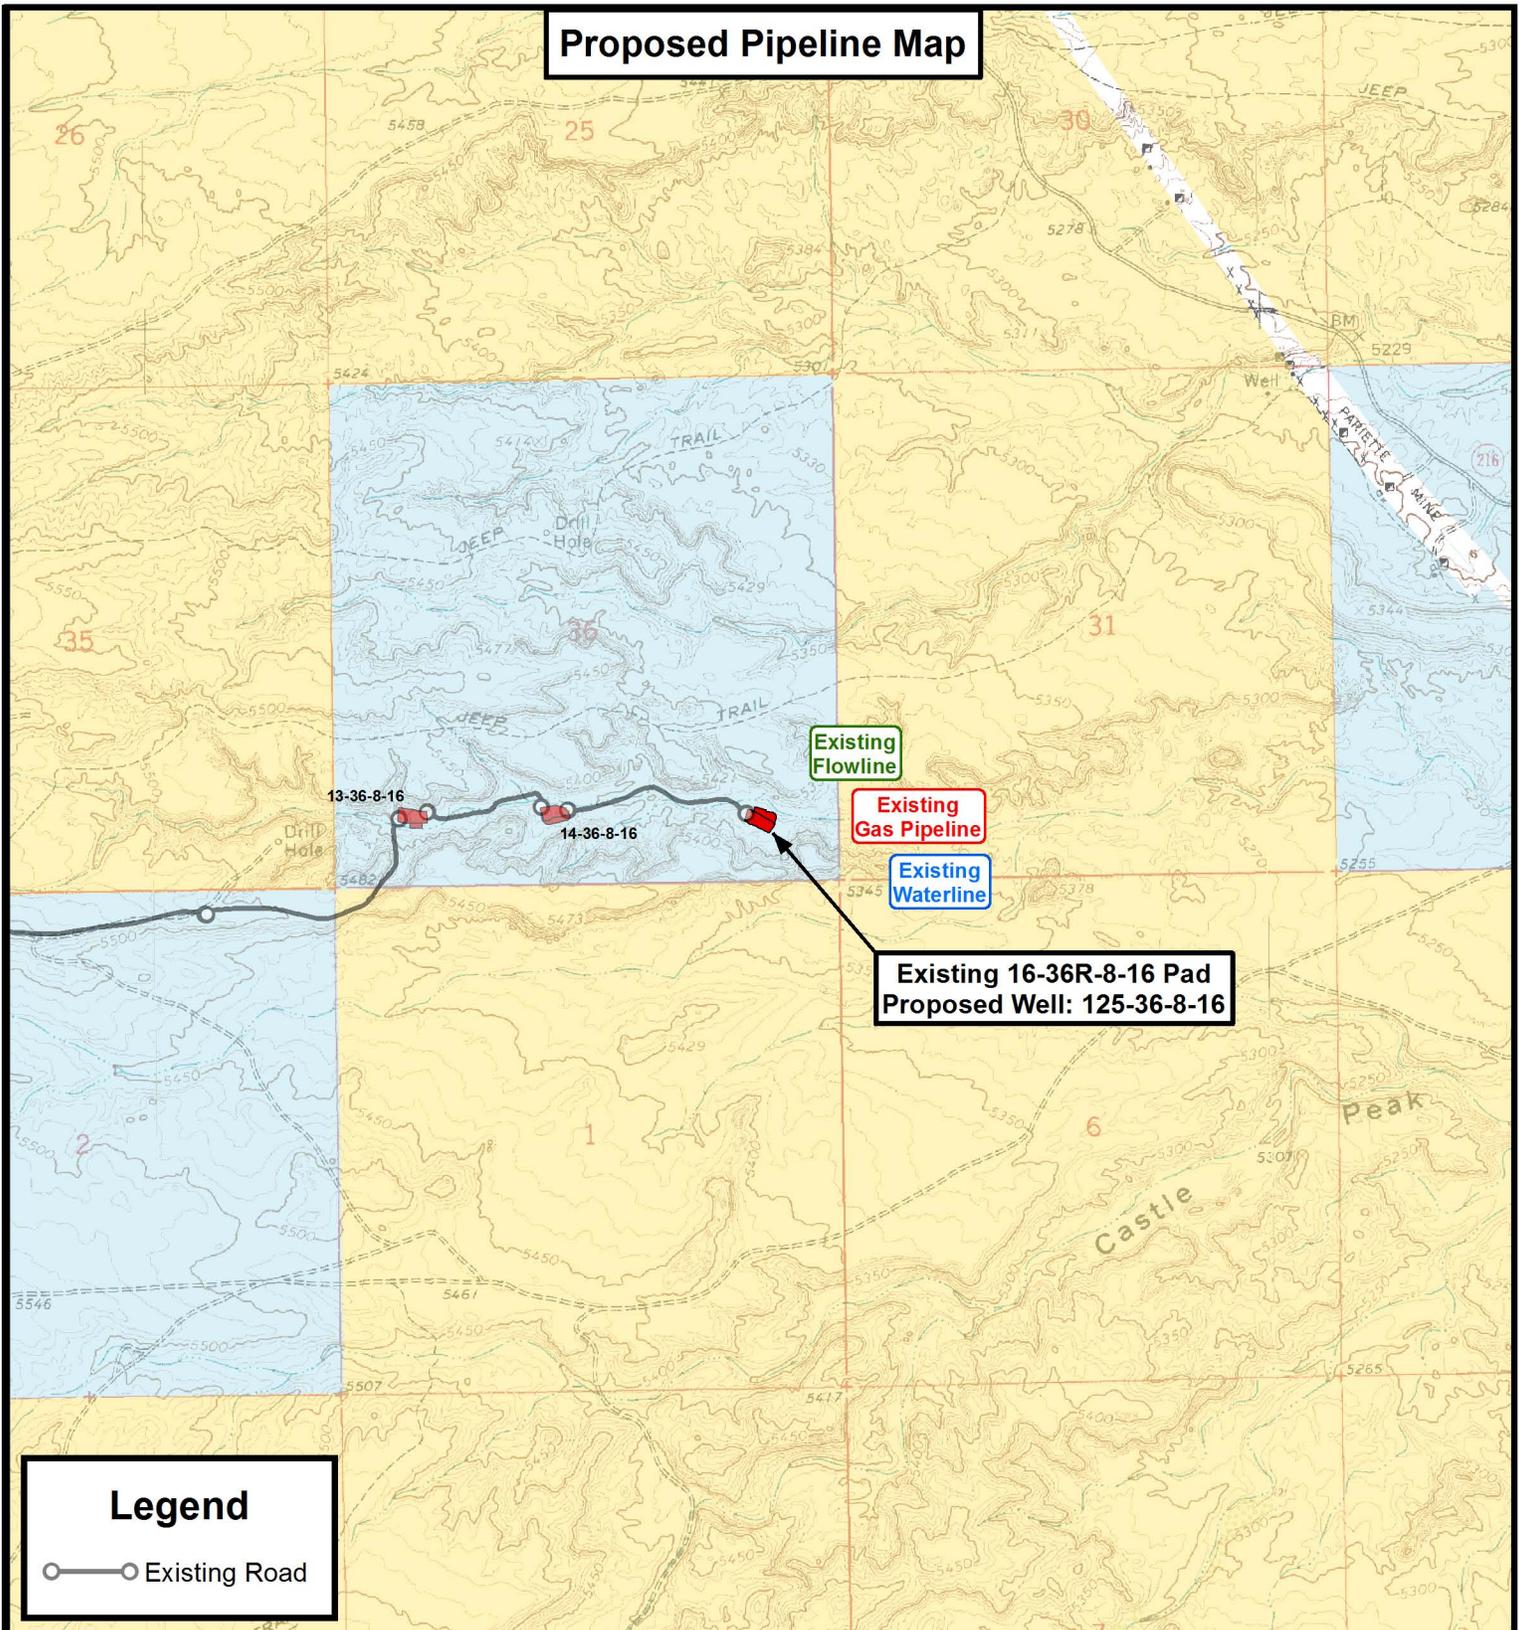

Legend

○—○ Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



**Tri State
Land Surveying, Inc.**
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

Existing 16-36R-8-16 Pad
Proposed Well: 125-36-8-16
Sec. 36, T8S, R16E, S.L.B.&M.
Duchesne County, UT.


DRAWN BY:	A.P.C.	REVISED:	09-09-13 A.P.C.	VERSION:
DATE:	08-14-2013			V2
SCALE:	1" = 2,000'			

TOPOGRAPHIC MAP

SHEET **C**

Exhibit "B" Map

**Existing 16-36R-8-16 Pad
Proposed Well: 125-36-8-16**

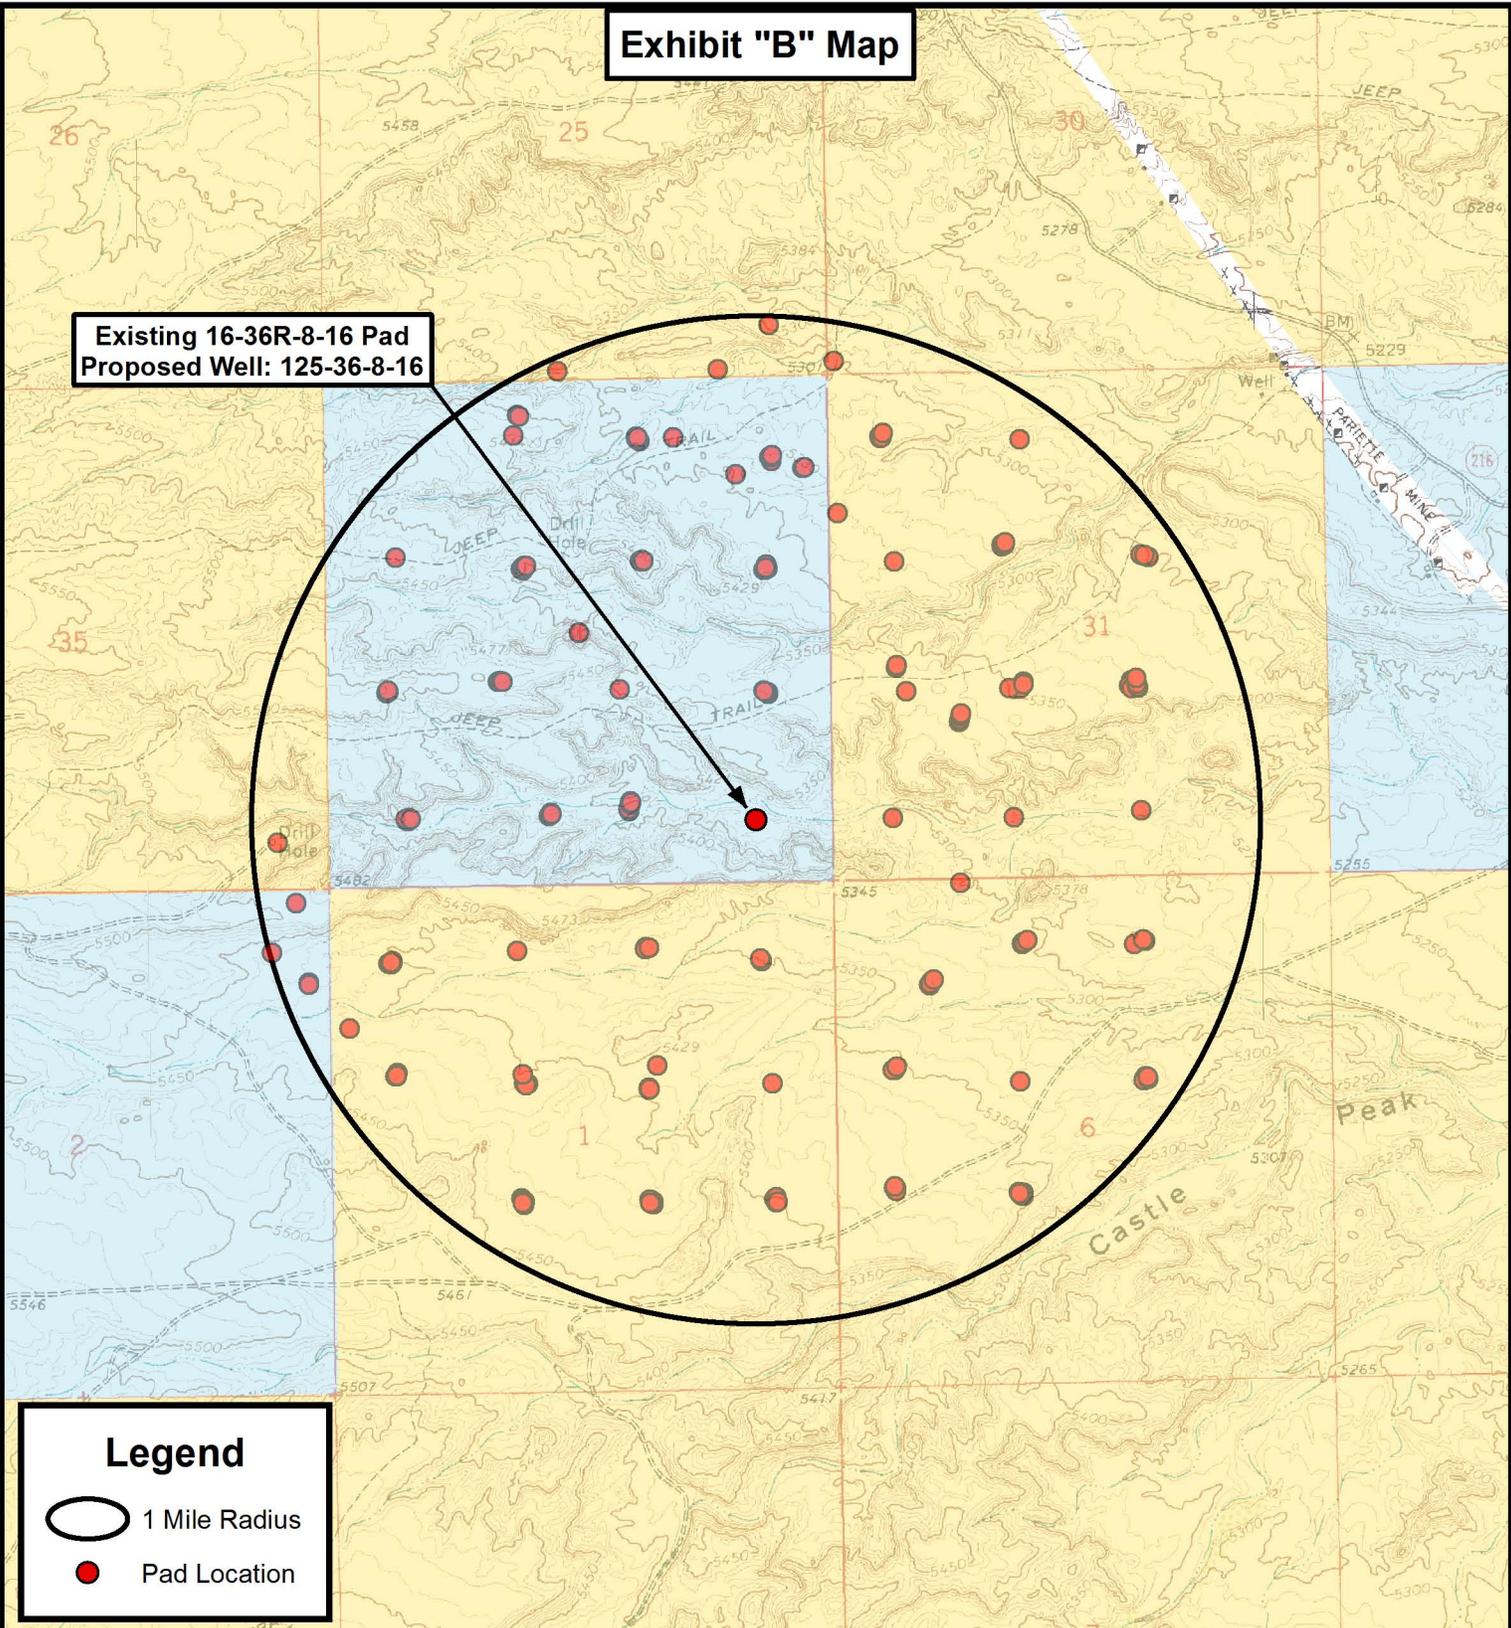

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



**Tri State
Land Surveying, Inc.**
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY
Existing 16-36R-8-16 Pad
Proposed Well: 125-36-8-16
Sec. 36, T8S, R16E, S.L.B.&M.
Duchesne County, UT.

DRAWN BY:	A.P.C.	REVISED:	VERSION:
DATE:	09-09-2013		V2
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET **D**

Coordinate Report

Well Number	Feature Type	Latitude (NAD 83) (DMS)	Longitude (NAD 83) (DMS)
16-36R-8-16	Surface Hole	40° 04' 08.06" N	110° 03' 40.42" W
T-36-8-16	Surface Hole	40° 04' 07.88" N	110° 03' 40.32" W
125-36-8-16	Surface Hole	40° 04' 08.24" N	110° 03' 40.55" W
125-36-8-16	Center of Pattern	40° 04' 14.27" N	110° 03' 39.56" W
125-36-8-16	Bottom of Hole	40° 04' 15.82" N	110° 03' 39.30" W
Well Number	Feature Type	Latitude (NAD 83) (DD)	Longitude (NAD 83) (DD)
16-36R-8-16	Surface Hole	40.068906	110.061228
T-36-8-16	Surface Hole	40.068857	110.061200
125-36-8-16	Surface Hole	40.068957	110.061265
125-36-8-16	Center of Pattern	40.070629	110.060988
125-36-8-16	Bottom of Hole	40.071060	110.060916
Well Number	Feature Type	Northing (NAD 83) (UTM Meters)	Longitude (NAD 83) (UTM Meters)
16-36R-8-16	Surface Hole	4435827.327	580053.347
T-36-8-16	Surface Hole	4435821.892	580055.785
125-36-8-16	Surface Hole	4435832.931	580050.129
125-36-8-16	Center of Pattern	4436018.848	580071.788
125-36-8-16	Bottom of Hole	4436066.705	580077.364
Well Number	Feature Type	Latitude (NAD 27) (DMS)	Longitude (NAD 27) (DMS)
16-36R-8-16	Surface Hole	40° 04' 08.20" N	110° 03' 37.88" W
T-36-8-16	Surface Hole	40° 04' 08.02" N	110° 03' 37.78" W
125-36-8-16	Surface Hole	40° 04' 08.38" N	110° 03' 38.01" W
125-36-8-16	Center of Pattern	40° 04' 14.40" N	110° 03' 37.01" W
125-36-8-16	Bottom of Hole	40° 04' 15.95" N	110° 03' 36.76" W
Well Number	Feature Type	Latitude (NAD 27) (DD)	Longitude (NAD 27) (DD)
16-36R-8-16	Surface Hole	40.068944	110.060522
T-36-8-16	Surface Hole	40.068895	110.060494
125-36-8-16	Surface Hole	40.068995	110.060559
125-36-8-16	Center of Pattern	40.070667	110.060282
125-36-8-16	Bottom of Hole	40.071098	110.060211



P: (435) 781-2501
F: (435) 781-2518

NEWFIELD EXPLORATION COMPANY

Existing 16-36R-8-16 Pad
Proposed Well: 125-36-8-16
Sec. 36, T8S, R16E, S.L.B.&M.
Duchesne County, UT.

DRAWN BY: A.P.C.
DATE: 09-09-2013
VERSION: V2

REVISED:

COORDINATE REPORT

SHEET

1

RECEIVED: January 16, 2014

Coordinate Report

Well Number	Feature Type	Northing (NAD 27) (UTM Meters)	Longitude (NAD 27) (UTM Meters)
16-36R-8-16	Surface Hole	4435622.003	580115.597
T-36-8-16	Surface Hole	4435616.568	580118.034
125-36-8-16	Surface Hole	4435627.607	580112.378
125-36-8-16	Center of Pattern	4435813.523	580134.037
125-36-8-16	Bottom of Hole	4435861.381	580139.612

**Tri State
Land Surveying, Inc.**
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518

NEWFIELD EXPLORATION COMPANY

Existing 16-36R-8-16 Pad
 Proposed Well: 125-36-8-16
 Sec. 36, T8S, R16E, S.L.B.&M.
 Duchesne County, UT.

DRAWN BY:	A.P.C.	REVISED:	
DATE:	09-09-2013		
VERSION:	V2		

COORDINATE REPORT

SHEET

2



NEWFIELD EXPLORATION

**USGS Myton SW (UT)
SECTION 36 T8S, R16E
125-36-8-16**

Wellbore #1

Plan: Design #1

Standard Planning Report

26 August, 2013





Payzone Directional
Planning Report



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well 125-36-8-16
Company:	NEWFIELD EXPLORATION	TVD Reference:	125-36-8-16 @ 5344.0ft (Original Well Elev)
Project:	USGS Myton SW (UT)	MD Reference:	125-36-8-16 @ 5344.0ft (Original Well Elev)
Site:	SECTION 36 T8S, R16E	North Reference:	True
Well:	125-36-8-16	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		

Site	SECTION 36 T8S, R16E, SEC 26 T8S, R16E				
Site Position:		Northing:	7,202,697.00 ft	Latitude:	40° 5' 3.401 N
From:	Lat/Long	Easting:	2,045,250.00 ft	Longitude:	110° 3' 10.915 W
Position Uncertainty:	0.0 ft	Slot Radius:	"	Grid Convergence:	0.93 °

Well	125-36-8-16, SHL LAT: 40 04 08.24 LONG: -110 03 40.55					
Well Position	+N/-S	-5,581.5 ft	Northing:	7,197,079.18 ft	Latitude:	40° 4' 8.240 N
	+E/-W	-2,303.3 ft	Easting:	2,043,036.81 ft	Longitude:	110° 3' 40.550 W
Position Uncertainty		0.0 ft	Wellhead Elevation:	5,344.0 ft	Ground Level:	5,334.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	8/26/2013	11.04	65.76	52,068

Design	Design #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.0	0.0	0.0	6.33

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,158.9	8.38	6.33	1,156.9	40.6	4.5	1.50	1.50	0.00	6.33	
5,093.0	8.38	6.33	5,049.0	610.7	67.7	0.00	0.00	0.00	0.00	125-36-8-16 TGT
6,177.6	8.38	6.33	6,122.0	767.9	85.2	0.00	0.00	0.00	0.00	



Payzone Directional
Planning Report



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well 125-36-8-16
Company:	NEWFIELD EXPLORATION	TVD Reference:	125-36-8-16 @ 5344.0ft (Original Well Elev)
Project:	USGS Myton SW (UT)	MD Reference:	125-36-8-16 @ 5344.0ft (Original Well Elev)
Site:	SECTION 36 T8S, R16E	North Reference:	True
Well:	125-36-8-16	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	1.50	6.33	700.0	1.3	0.1	1.3	1.50	1.50	0.00
800.0	3.00	6.33	799.9	5.2	0.6	5.2	1.50	1.50	0.00
900.0	4.50	6.33	899.7	11.7	1.3	11.8	1.50	1.50	0.00
1,000.0	6.00	6.33	999.3	20.8	2.3	20.9	1.50	1.50	0.00
1,100.0	7.50	6.33	1,098.6	32.5	3.6	32.7	1.50	1.50	0.00
1,158.9	8.38	6.33	1,156.9	40.6	4.5	40.8	1.50	1.50	0.00
1,200.0	8.38	6.33	1,197.6	46.5	5.2	46.8	0.00	0.00	0.00
1,300.0	8.38	6.33	1,296.5	61.0	6.8	61.4	0.00	0.00	0.00
1,400.0	8.38	6.33	1,395.4	75.5	8.4	76.0	0.00	0.00	0.00
1,500.0	8.38	6.33	1,494.4	90.0	10.0	90.6	0.00	0.00	0.00
1,600.0	8.38	6.33	1,593.3	104.5	11.6	105.1	0.00	0.00	0.00
1,700.0	8.38	6.33	1,692.2	119.0	13.2	119.7	0.00	0.00	0.00
1,800.0	8.38	6.33	1,791.2	133.5	14.8	134.3	0.00	0.00	0.00
1,900.0	8.38	6.33	1,890.1	148.0	16.4	148.9	0.00	0.00	0.00
2,000.0	8.38	6.33	1,989.0	162.5	18.0	163.5	0.00	0.00	0.00
2,100.0	8.38	6.33	2,088.0	177.0	19.6	178.0	0.00	0.00	0.00
2,200.0	8.38	6.33	2,186.9	191.4	21.2	192.6	0.00	0.00	0.00
2,300.0	8.38	6.33	2,285.8	205.9	22.8	207.2	0.00	0.00	0.00
2,400.0	8.38	6.33	2,384.7	220.4	24.4	221.8	0.00	0.00	0.00
2,500.0	8.38	6.33	2,483.7	234.9	26.1	236.4	0.00	0.00	0.00
2,600.0	8.38	6.33	2,582.6	249.4	27.7	250.9	0.00	0.00	0.00
2,700.0	8.38	6.33	2,681.5	263.9	29.3	265.5	0.00	0.00	0.00
2,800.0	8.38	6.33	2,780.5	278.4	30.9	280.1	0.00	0.00	0.00
2,900.0	8.38	6.33	2,879.4	292.9	32.5	294.7	0.00	0.00	0.00
3,000.0	8.38	6.33	2,978.3	307.4	34.1	309.3	0.00	0.00	0.00
3,100.0	8.38	6.33	3,077.3	321.9	35.7	323.8	0.00	0.00	0.00
3,200.0	8.38	6.33	3,176.2	336.4	37.3	338.4	0.00	0.00	0.00
3,300.0	8.38	6.33	3,275.1	350.9	38.9	353.0	0.00	0.00	0.00
3,400.0	8.38	6.33	3,374.1	365.3	40.5	367.6	0.00	0.00	0.00
3,500.0	8.38	6.33	3,473.0	379.8	42.1	382.2	0.00	0.00	0.00
3,600.0	8.38	6.33	3,571.9	394.3	43.7	396.7	0.00	0.00	0.00
3,700.0	8.38	6.33	3,670.9	408.8	45.3	411.3	0.00	0.00	0.00
3,800.0	8.38	6.33	3,769.8	423.3	46.9	425.9	0.00	0.00	0.00
3,900.0	8.38	6.33	3,868.7	437.8	48.5	440.5	0.00	0.00	0.00
4,000.0	8.38	6.33	3,967.6	452.3	50.2	455.1	0.00	0.00	0.00
4,100.0	8.38	6.33	4,066.6	466.8	51.8	469.6	0.00	0.00	0.00
4,200.0	8.38	6.33	4,165.5	481.3	53.4	484.2	0.00	0.00	0.00
4,300.0	8.38	6.33	4,264.4	495.8	55.0	498.8	0.00	0.00	0.00
4,400.0	8.38	6.33	4,363.4	510.3	56.6	513.4	0.00	0.00	0.00
4,500.0	8.38	6.33	4,462.3	524.8	58.2	528.0	0.00	0.00	0.00
4,600.0	8.38	6.33	4,561.2	539.2	59.8	542.6	0.00	0.00	0.00
4,700.0	8.38	6.33	4,660.2	553.7	61.4	557.1	0.00	0.00	0.00
4,800.0	8.38	6.33	4,759.1	568.2	63.0	571.7	0.00	0.00	0.00
4,900.0	8.38	6.33	4,858.0	582.7	64.6	586.3	0.00	0.00	0.00
5,000.0	8.38	6.33	4,957.0	597.2	66.2	600.9	0.00	0.00	0.00
5,093.0	8.38	6.33	5,049.0	610.7	67.7	614.4	0.00	0.00	0.00
5,100.0	8.38	6.33	5,055.9	611.7	67.8	615.5	0.00	0.00	0.00



Payzone Directional
Planning Report



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well 125-36-8-16
Company:	NEWFIELD EXPLORATION	TVD Reference:	125-36-8-16 @ 5344.0ft (Original Well Elev)
Project:	USGS Myton SW (UT)	MD Reference:	125-36-8-16 @ 5344.0ft (Original Well Elev)
Site:	SECTION 36 T8S, R16E	North Reference:	True
Well:	125-36-8-16	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
5,200.0	8.38	6.33	5,154.8	626.2	69.4	630.0	0.00	0.00	0.00	
5,300.0	8.38	6.33	5,253.8	640.7	71.0	644.6	0.00	0.00	0.00	
5,400.0	8.38	6.33	5,352.7	655.2	72.7	659.2	0.00	0.00	0.00	
5,500.0	8.38	6.33	5,451.6	669.7	74.3	673.8	0.00	0.00	0.00	
5,600.0	8.38	6.33	5,550.5	684.2	75.9	688.4	0.00	0.00	0.00	
5,700.0	8.38	6.33	5,649.5	698.7	77.5	702.9	0.00	0.00	0.00	
5,800.0	8.38	6.33	5,748.4	713.1	79.1	717.5	0.00	0.00	0.00	
5,900.0	8.38	6.33	5,847.3	727.6	80.7	732.1	0.00	0.00	0.00	
6,000.0	8.38	6.33	5,946.3	742.1	82.3	746.7	0.00	0.00	0.00	
6,100.0	8.38	6.33	6,045.2	756.6	83.9	761.3	0.00	0.00	0.00	
6,177.6	8.38	6.33	6,122.0	767.9	85.2	772.6	0.00	0.00	0.00	





Project: USGS Myton SW (UT)
 Site: SECTION 36 T8S, R16E
 Well: 125-36-8-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.03°

Magnetic Field
 Strength: 52068.0snT
 Dip Angle: 65.76°
 Date: 8/26/2013
 Model: IGRF2010

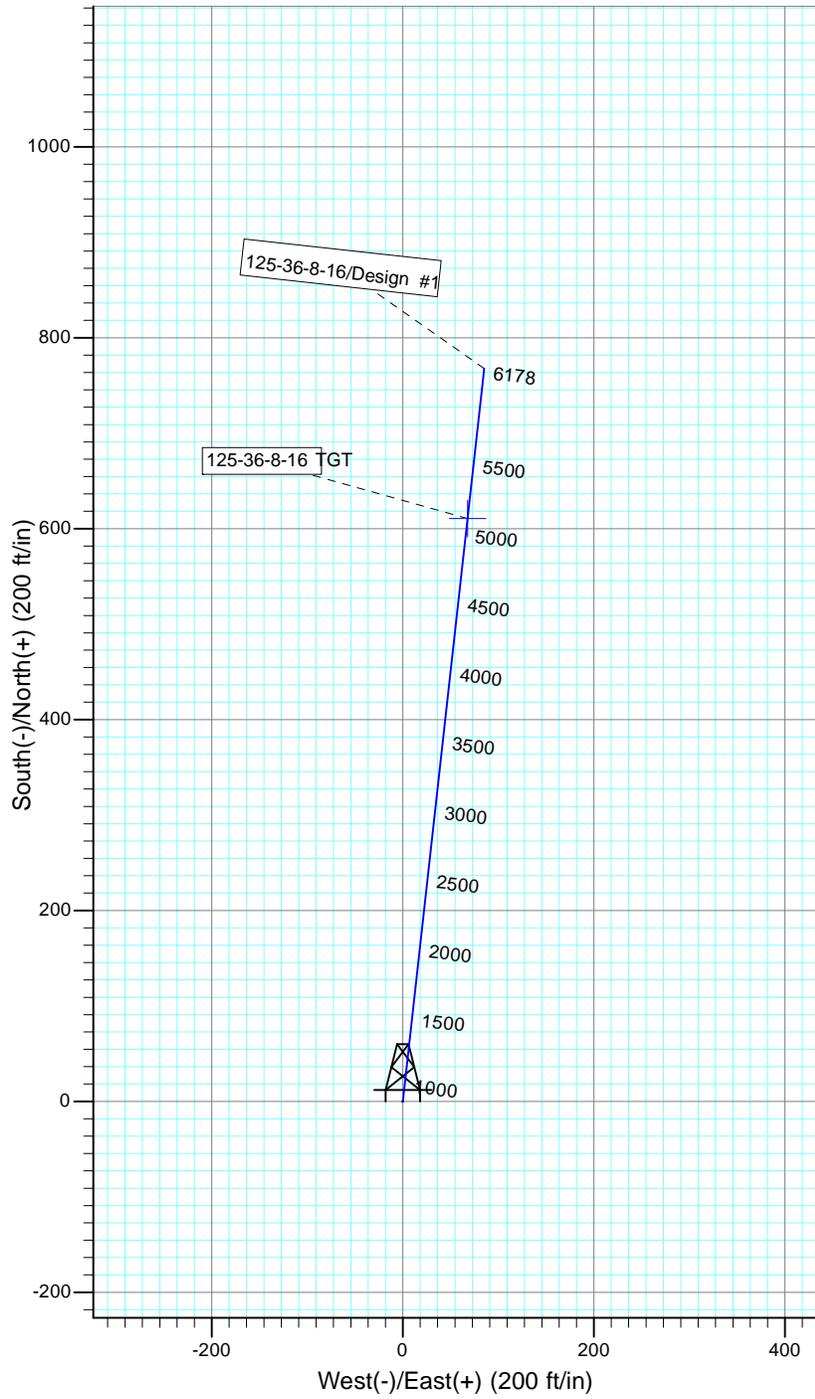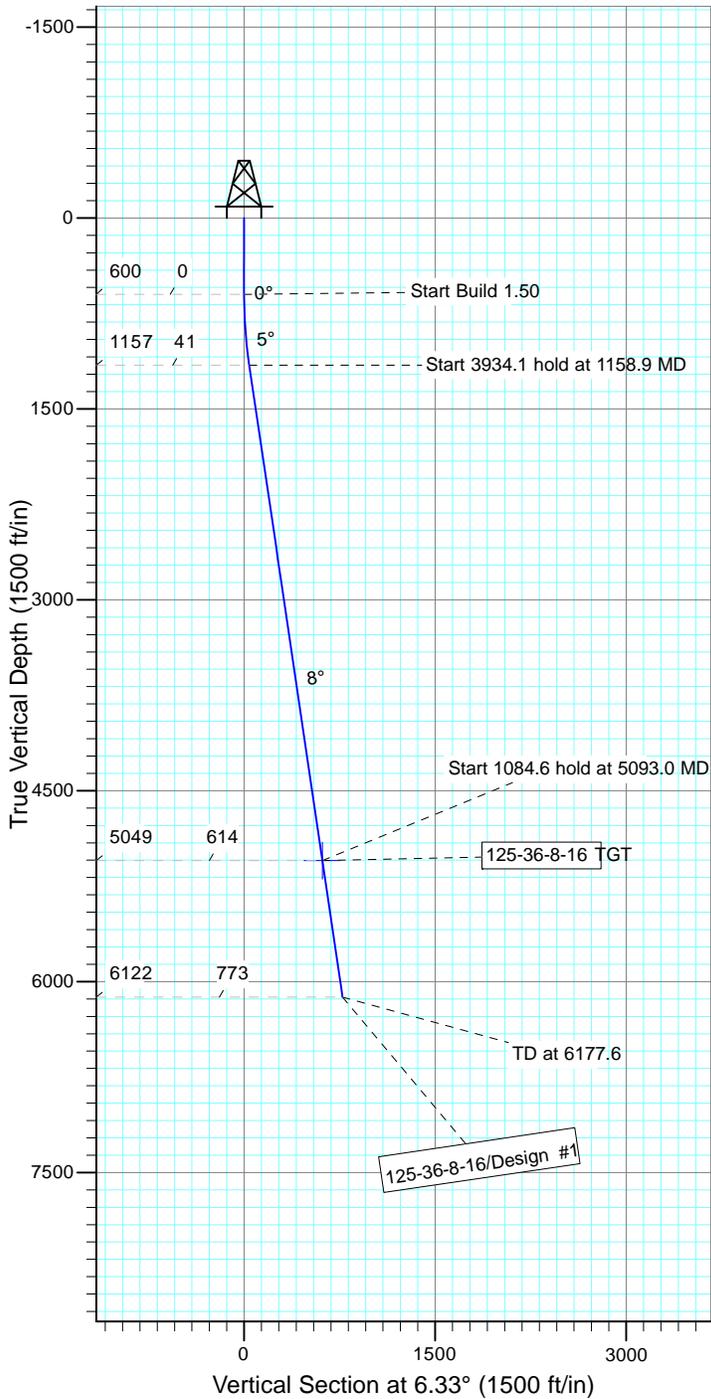

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
125-36-8-16 TGT	5049.0	610.7	67.7	Point

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1158.9	8.38	6.33	1156.9	40.6	4.5	1.50	6.33	40.8	
4	5093.0	8.38	6.33	5049.0	610.7	67.7	0.00	0.00	614.4	125-36-8-16 TGT
5	6177.6	8.38	6.33	6122.0	767.9	85.2	0.00	0.00	772.6	



**NEWFIELD PRODUCTION COMPANY
GMBU 125-36-8-16
AT SURFACE: SE/SE SECTION 36, T8S R16E
DUCHESNE COUNTY, UTAH**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site GMBU 125-36-8-16 located in the SE 1/4 SE 1/4 Section 36, T8S, R16E, Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 – 1.4 miles \pm to the junction of this highway and UT State Hwy 53; proceed in a southeasterly direction – 6.2 miles \pm to it's junction with an existing road to the southwest; proceed in a southwesterly direction – 2.8 miles \pm to it's junction with an existing road to the southeast; proceed in a southeasterly and then easterly direction – 3.0 miles \pm to it's junction with the beginning of the access road to the existing 16-36R-8-16 well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

There is no proposed access road for this location. The proposed well will be drilled directionally off of the existing 16-36R-8-16 well pad. See attached **Topographic Map "B"**.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District
Water Right : 43-7478

Maurice Harvey Pond
Water Right: 47-1358

Neil Moon Pond
Water Right: 43-11787

Newfield Collector Well
Water Right: 47-1817 (A30414DVA, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

Closed Loop Drilling

Newfield Production will drill the proposed well with a Closed Loop Drilling System. A small cuttings pit will be constructed inboard of the pad area. The pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore using a conventional closed-loop system. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

8. **ANCILLARY FACILITIES**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT**

See attached Location Layout Sheet.

Fencing Requirements

- a) All pits will be fenced or have panels installed consistent with the following minimum standards:
 1. The wire shall be no more than two (2) inches above the ground. If barbed wire is utilized it will be installed three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
 2. Corner posts shall be centered and/or braced in such a manner to keep tight and upright at all times
 3. Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

- a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

- b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP** – State Of Utah.

12. **OTHER ADDITIONAL INFORMATION**

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. State of Utah Antiquities Project (Survey) Permit No. U-13-MQ-0969bps, 11/25/13, prepared by Montgomery Archaeological Consultants. Paleontological Resource Survey prepared by, Wade Miller, 10/30/13. See attached report cover pages, Exhibit "D".

Water Disposal

After first production, if the production water meets quality guidelines, it will be transported to the Ashley, Monument Butte, Jonah, South Wells Draw and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project. Water not meeting quality criteria, will be disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), Federally approved surface disposal facilities or at a State of Utah approved surface disposal facilities.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made

with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the GMBU 125-36-8-16, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the GMBU 125-36-8-16, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative

Name: Corie Miller
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification

Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #125-36-8-16, Section 36, Township 8S, Range 16E: Lease ML-22061, Duchesne County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, State Bond #B001834.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

2/11/14
Date

Mandie Crozier
Regulatory Analyst
Newfield Production Company

Typical 2M BOP stack configuration



2M CHOKE MANIFOLD EQUIPMENT - CONFIGURATION OF CHOKES MAY VARY

NEWFIELD EXPLORATION COMPANY

WELL PAD INTERFERENCE PLAT

EXISTING 16-36R-8-16 PAD

PROPOSED WELL: 125-36-8-16

Pad Location: SESE Section 36, T8S, R16E, S.L.B.&M.



TOP HOLE FOOTAGES


125-36-8-16
672' FSL & 818' FEL

CENTER OF PATTERN FOOTAGES

125-36-8-16
1282' FSL & 738' FEL

BOTTOM HOLE FOOTAGES

125-36-8-16
1439' FSL & 721' FEL

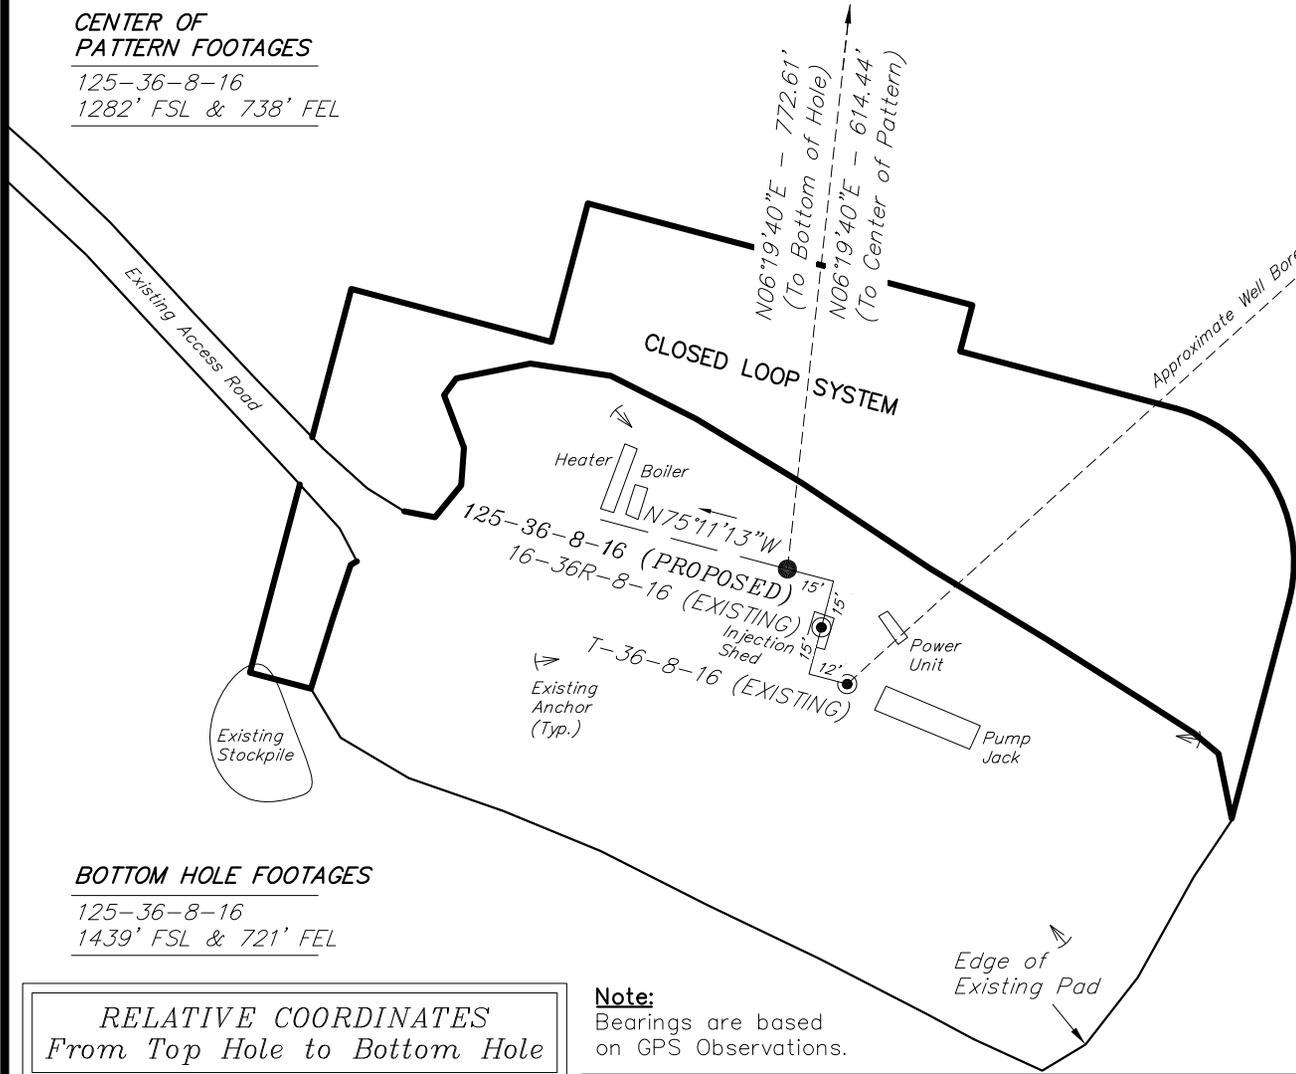

RELATIVE COORDINATES From Top Hole to C.O.P.		
WELL	NORTH	EAST
125-36-8-16	611'	68'

LATITUDE & LONGITUDE Surface position of Wells (NAD 83)		
WELL	LATITUDE	LONGITUDE
16-36R-8-16	40° 04' 08.06"	110° 03' 40.42"
T-36-8-16	40° 04' 07.88"	110° 03' 40.32"
125-36-8-16	40° 04' 08.24"	110° 03' 40.55"

LATITUDE & LONGITUDE Center of Pattern (NAD 83)		
WELL	LATITUDE	LONGITUDE
125-36-8-16	40° 04' 14.27"	110° 03' 39.56"

LATITUDE & LONGITUDE Bottom Hole Position (NAD 83)		
WELL	LATITUDE	LONGITUDE
125-36-8-16	40° 04' 15.82"	110° 03' 39.30"

RELATIVE COORDINATES From Top Hole to Bottom Hole		
WELL	NORTH	EAST
125-36-8-16	768'	85'

Note:
Bearings are based on GPS Observations.

SURVEYED BY: G.D.O.	DATE SURVEYED: 07-29-13	VERSION:
DRAWN BY: F.T.M.	DATE DRAWN: 09-09-13	V3
SCALE: 1" = 60'	REVISED: F.T.M. 02-06-14	

Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078


NEWFIELD EXPLORATION COMPANY

LOCATION LAYOUT

EXISTING 16-36R-8-16 PAD

PROPOSED WELL: 125-36-8-16

Pad Location: SESE Section 36, T8S, R16E, S.L.B.&M.

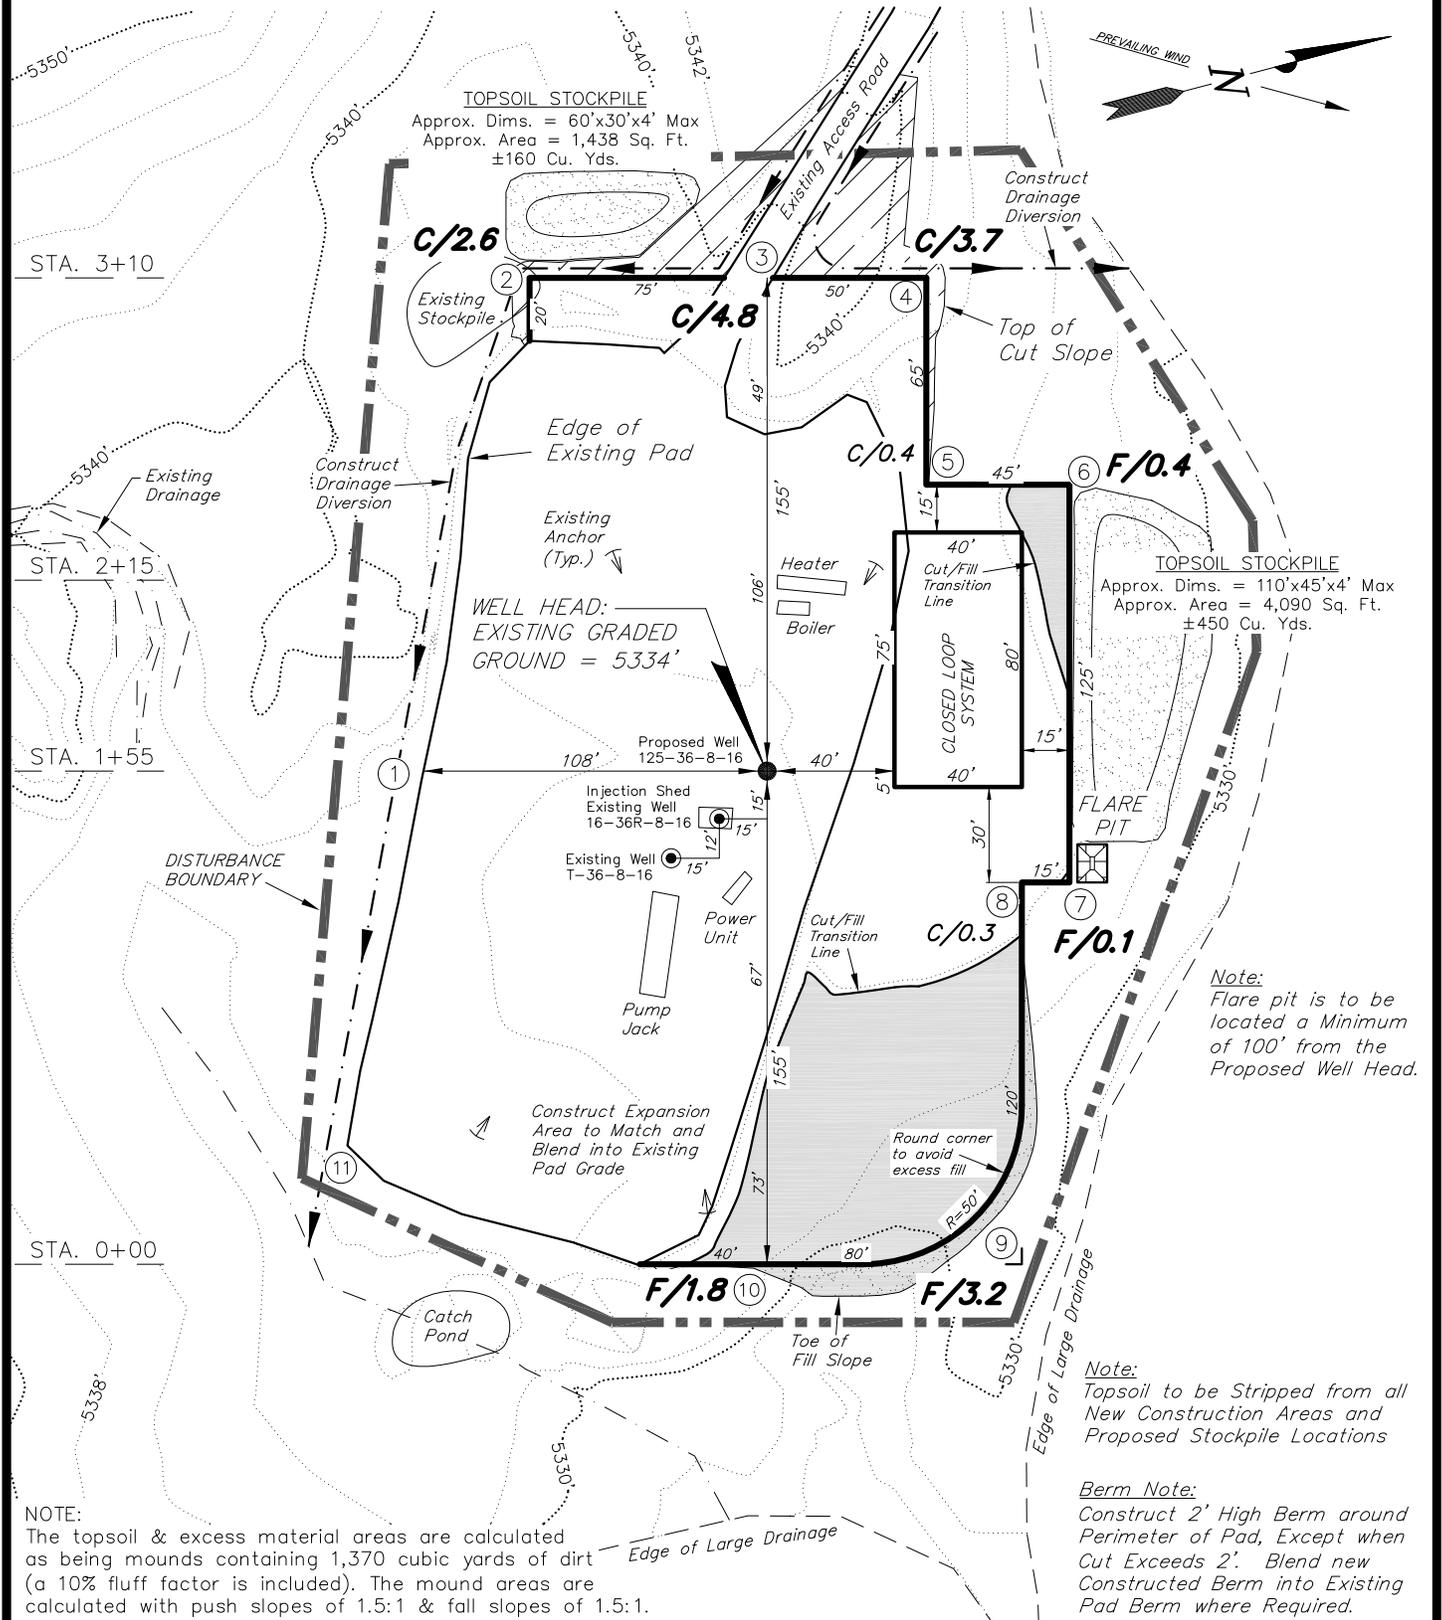

Note:
Flare pit is to be located a Minimum of 100' from the Proposed Well Head.

Note:
Topsoil to be Stripped from all New Construction Areas and Proposed Stockpile Locations

Berm Note:
Construct 2' High Berm around Perimeter of Pad, Except when Cut Exceeds 2'. Blend new Constructed Berm into Existing Pad Berm where Required.

NOTE:
The topsoil & excess material areas are calculated as being mounds containing 1,370 cubic yards of dirt (a 10% fluff factor is included). The mound areas are calculated with push slopes of 1.5:1 & fall slopes of 1.5:1.





SURVEYED BY: G.D.O.	DATE SURVEYED: 07-29-13	VERSION:
DRAWN BY: F.T.M.	DATE DRAWN: 08-05-13	V3
SCALE: 1" = 60'	REVISED: F.T.M. 02-06-14	

Tri State Land Surveying, Inc. (435) 781-2501
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD EXPLORATION COMPANY

CROSS SECTIONS EXISTING 16-36R-8-16 PAD PROPOSED WELL: 125-36-8-16

Pad Location: SESE Section 36, T8S, R16E, S.L.B.&M.

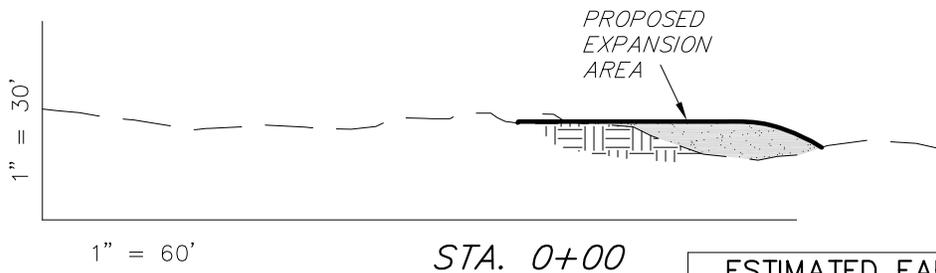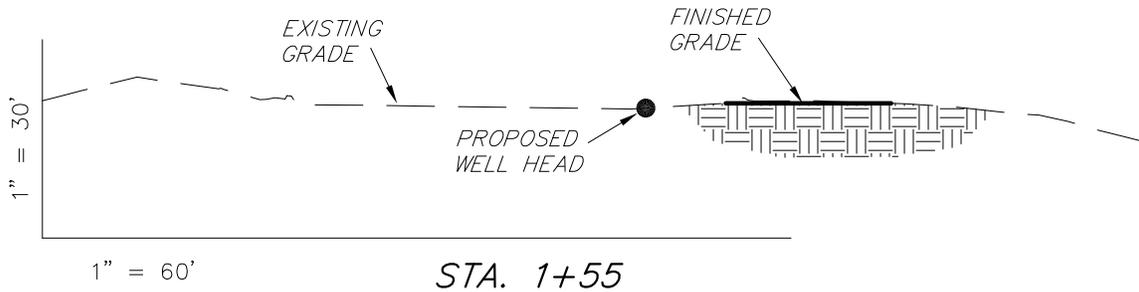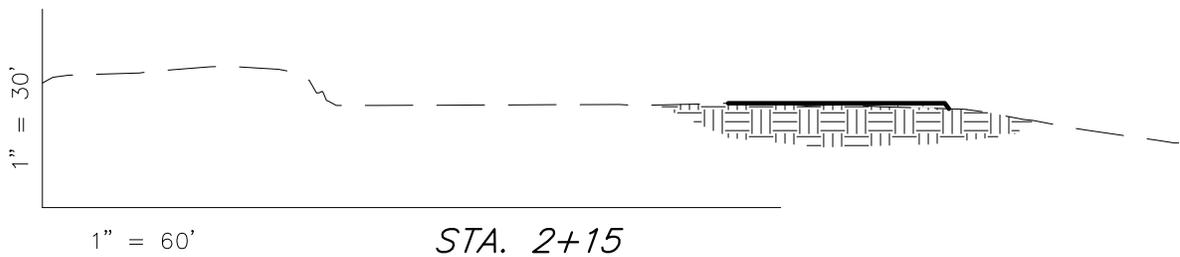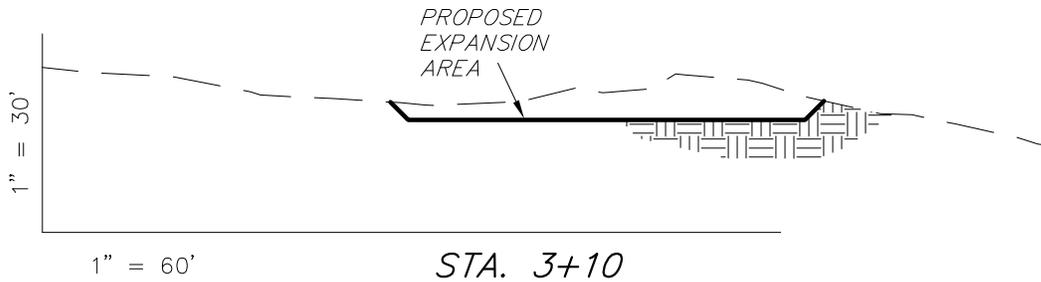

NOTE:
UNLESS OTHERWISE NOTED ALL
CUT SLOPES ARE AT 2:1
FILL SLOPES ARE AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES (No Shrink or swell adjustments have been used) (Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	460	460	Topsoil is not included in Pad Cut	0
PIT	N/A	N/A		N/A
TOTALS	460	460	490	0

SURVEYED BY: G.D.O.	DATE SURVEYED: 07-29-13	VERSION:
DRAWN BY: F.T.M.	DATE DRAWN: 09-09-13	V3
SCALE: 1" = 60'	REVISED: F.T.M. 02-06-14	

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

(435) 781-2501

RECEIVED: February 11, 2014


NEWFIELD EXPLORATION COMPANY

TYPICAL RIG LAYOUT

EXISTING 16-36R-8-16 PAD

PROPOSED WELL: 125-36-8-16

Pad Location: SESE Section 36, T8S, R16E, S.L.B.&M.

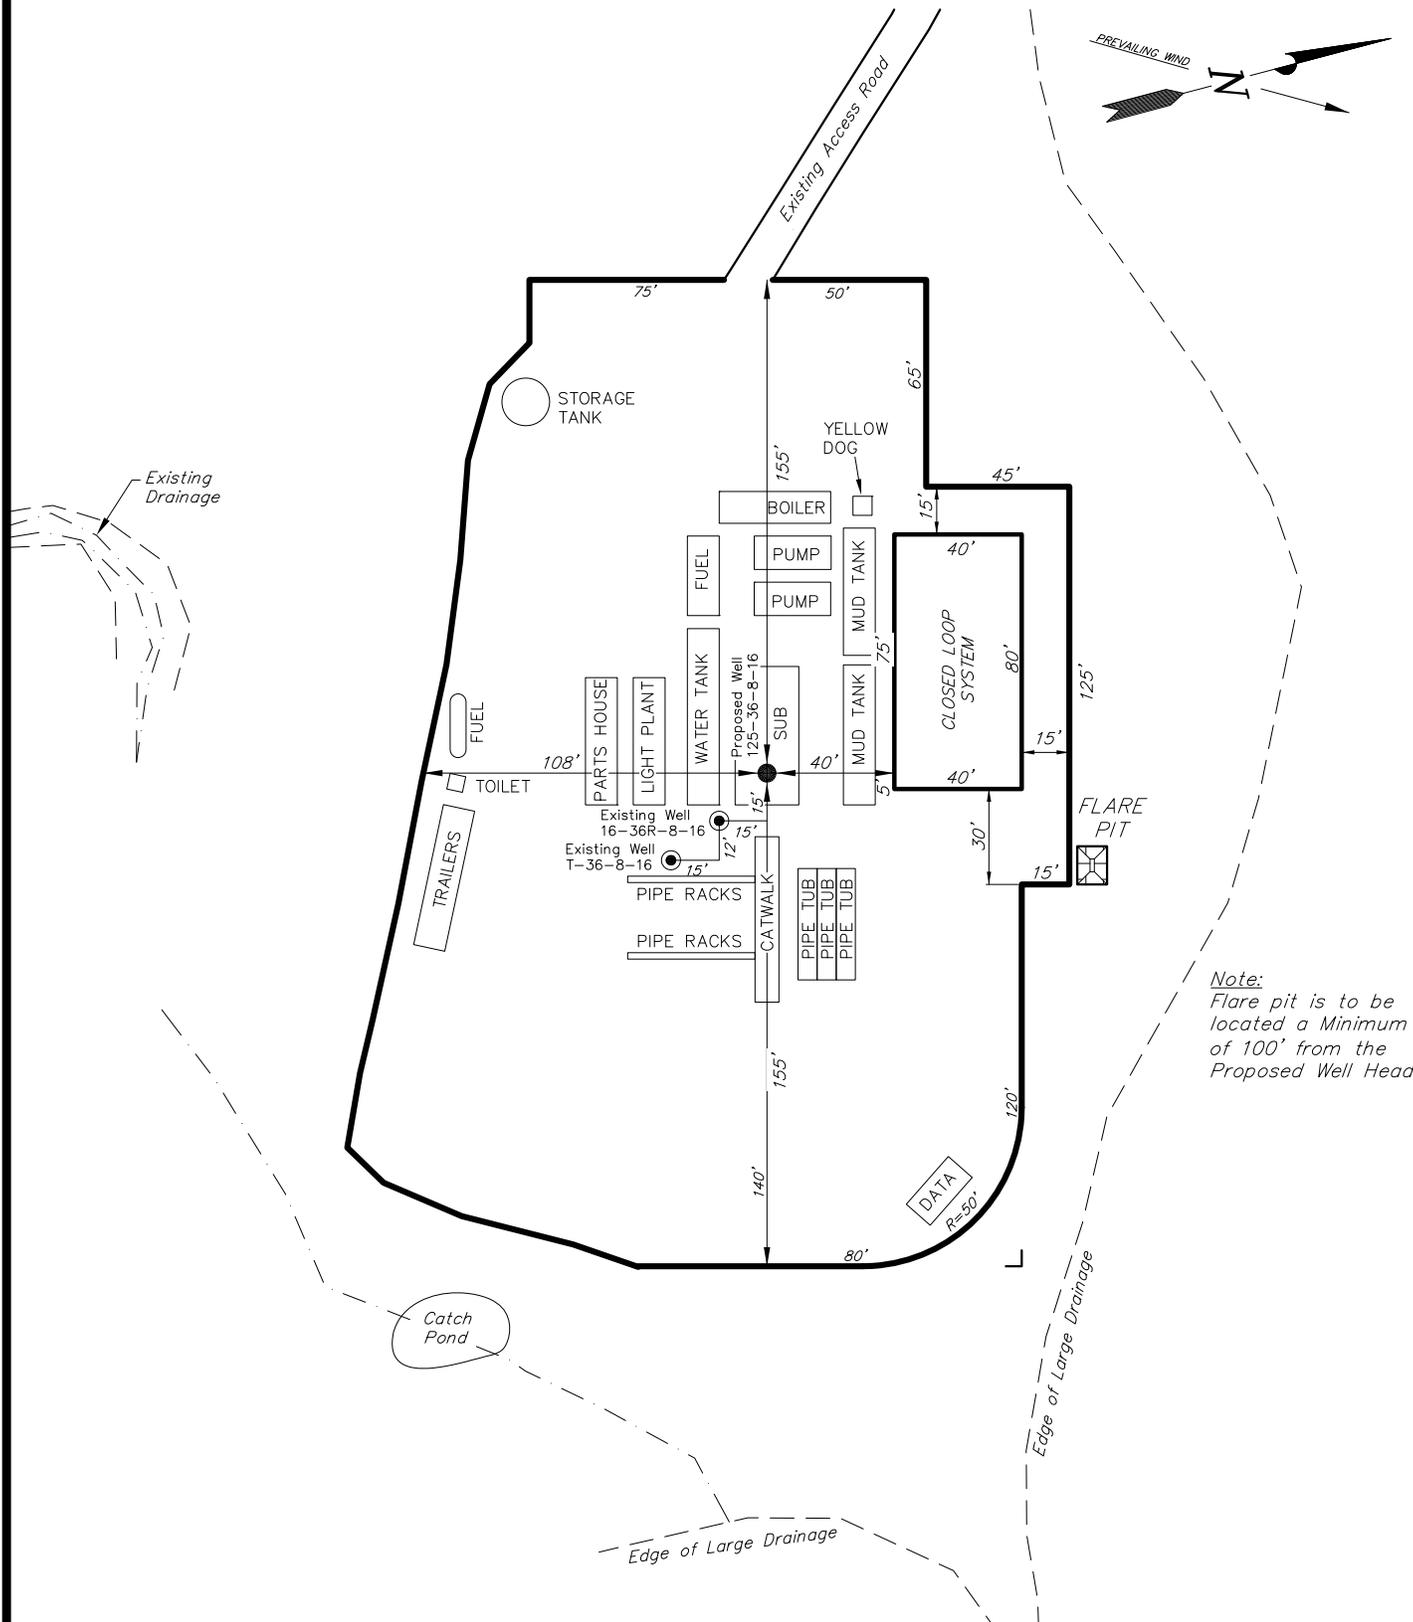

Note:
Flare pit is to be located a Minimum of 100' from the Proposed Well Head.

SURVEYED BY: G.D.O.	DATE SURVEYED: 07-29-13	VERSION:	 Tri State Land Surveying, Inc. 180 NORTH VERNAL AVE. VERNAL, UTAH 84078	(435) 781-2501
DRAWN BY: F.T.M.	DATE DRAWN: 09-09-13	V3		
SCALE: 1" = 60'	REVISED: F.T.M. 02-06-14			

RECEIVED: February 11, 2014


NEWFIELD EXPLORATION COMPANY

RECLAMATION LAYOUT

EXISTING 16-36R-8-16 PAD

PROPOSED WELL: 125-36-8-16

Pad Location: SESE Section 36, T8S, R16E, S.L.B.&M.

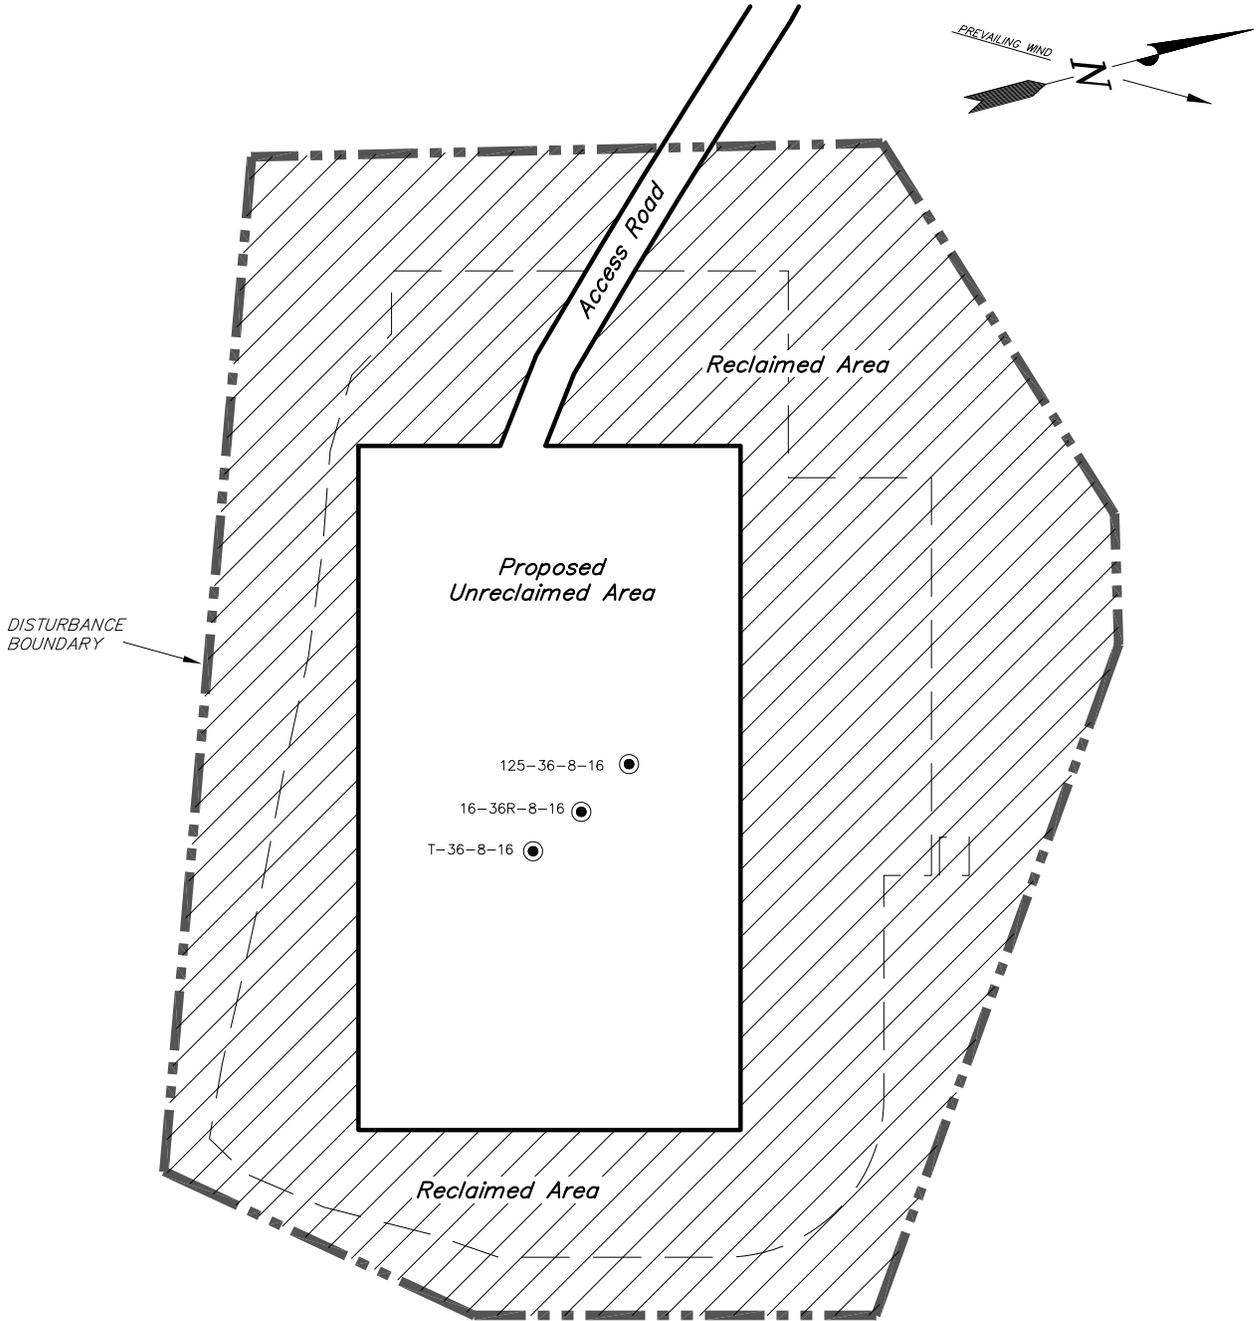

Notes:

1. Reclaimed Area to Include Seeding of Approved Vegetation and Sufficient Storm Water Management System.
2. Actual Equipment Layout and Reclaimed Pad Surface Area May Change due to Production Requirements or Site Conditions.

DISTURBED AREA:

TOTAL DISTURBED AREA = ±2.09 ACRES
 TOTAL RECLAIMED AREA = ±1.47 ACRES
 UNRECLAIMED AREA = ±0.62 ACRES

SURVEYED BY: G.D.O.	DATE SURVEYED: 07-29-13	VERSION:
DRAWN BY: F.T.M.	DATE DRAWN: 09-09-13	V3
SCALE: 1" = 60'	REVISED: F.T.M. 02-06-14	

Tri State (435) 781-2501
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD EXPLORATION COMPANY


PROPOSED SITE FACILITY DIAGRAM

16-36R-8-16 PAD

T-36-8-16 ML-22061

125-36-8-16 ML-22061

*Pad Location: SESE Section 36, T8S, R16E, S.L.B.&M.
Duchesne County, Utah*

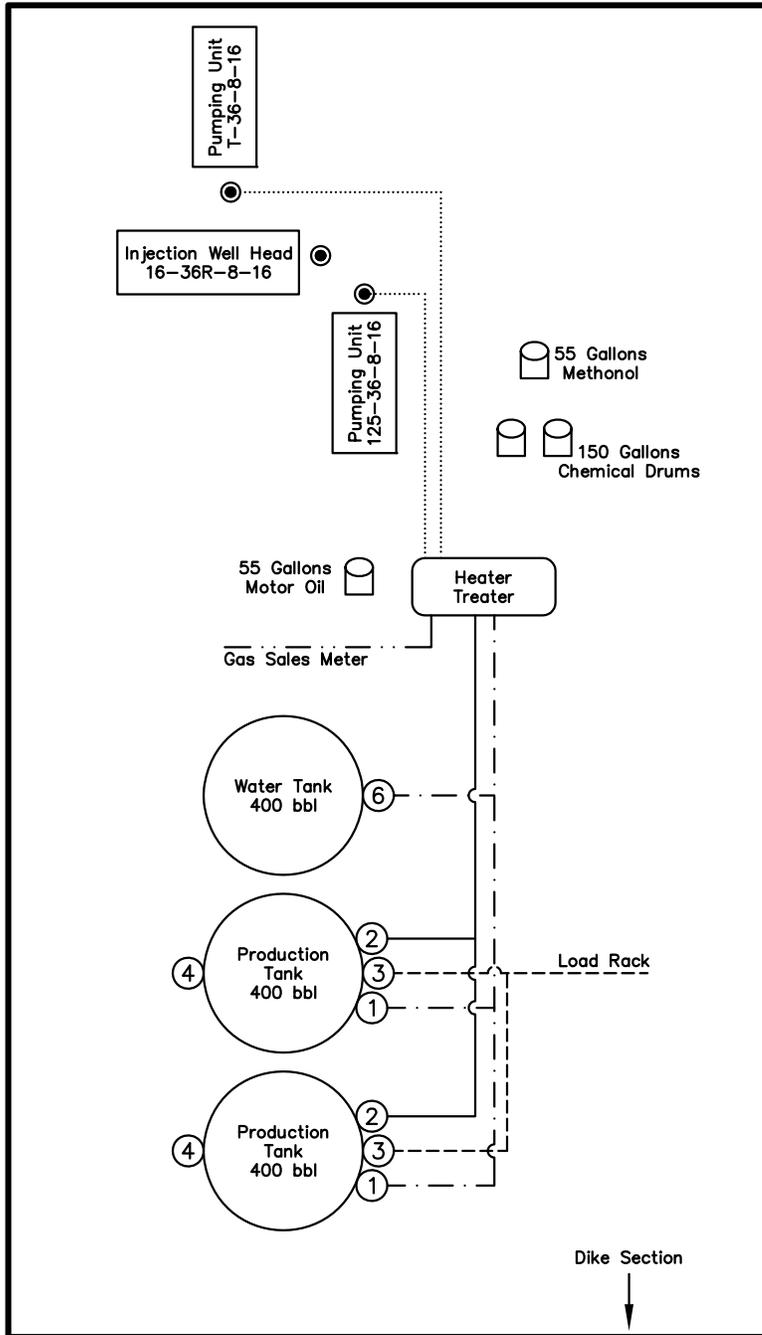


Legend

Emulsion Line
Load Rack	-----
Water Line	- . - . - .
Gas Sales	- . - . - . - .
Oil Line	—————

NOT TO SCALE

SURVEYED BY: G.D.O.	DATE SURVEYED: 07-29-13	VERSION:
DRAWN BY: F.T.M.	DATE DRAWN: 09-09-13	V3
SCALE: NONE	REVISED: F.T.M. 02-06-14	

Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

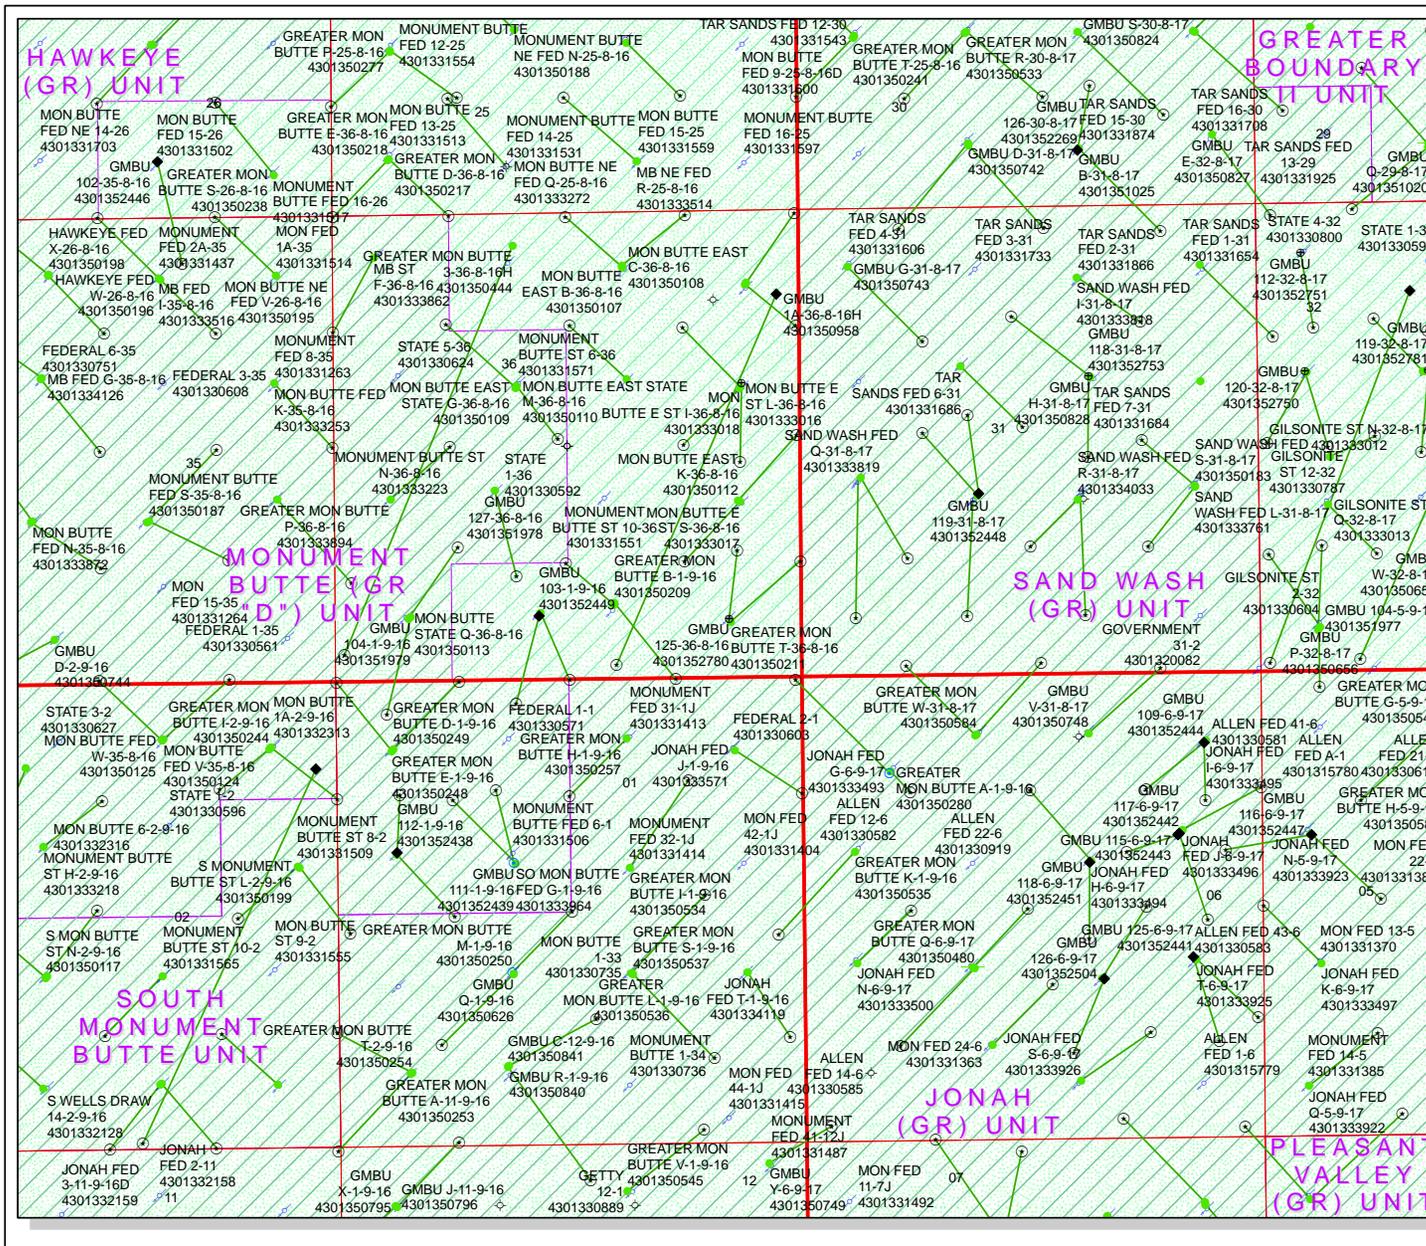

API Number: 4301352780

Well Name: GMBU 125-36-8-16



Township: T08.0S Range: R16.0E Section: 36 Meridian: S

Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared: 1/17/2014
Map Produced by Diana Mason

Wells Query		Units	
●	APD - Approved Permit	□	ACTIVE
●	DRL - Spudded (Drilling Commenced)	□	EXPLORATORY
●	GIW - Gas Injection	□	GAS STORAGE
●	GS - Gas Storage	□	NF PP OIL
●	LOC - New Location	□	NF SECONDARY
●	OPS - Operation Suspended	□	PI OIL
●	PA - Plugged Abandoned	□	PP GAS
●	PGW - Producing Gas Well	□	PP GEOTHERMAL
●	POW - Producing Oil Well	□	PP OIL
●	SGW - Shut-in Gas Well	□	SECONDARY
●	SOW - Shut-in Oil Well	□	TERMINATED
●	TA - Temp. Abandoned	□	
○	TW - Test Well	□	
○	WOW - Water Disposal	□	
○	WW - Water Injection Well	□	
○	WSW - Water Supply Well	□	

Fields	
□	Unknown
□	ABANDONED
□	ACTIVE
□	COMBINED
□	INACTIVE
□	STORAGE
□	TERMINATED

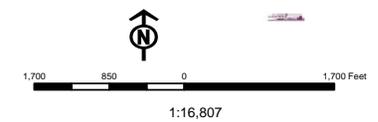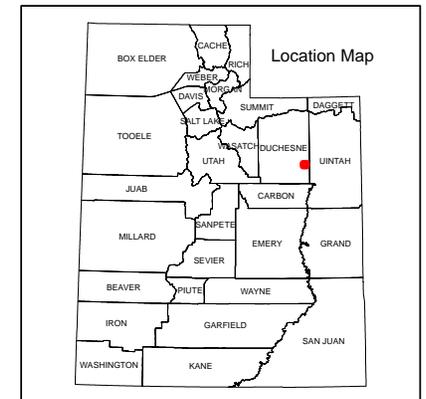

NEWFIELD



VIA ELECTRONIC DELIVERY

January 20, 2014

State of Utah, Division of Oil, Gas and Mining
ATTN: Diana Mason
P.O. Box 145801
Salt Lake City, UT 84114-5801

Newfield Exploration Company

1001 17th Street | Suite 2000
Denver, Colorado 80202
PH 303-893-0102 | FAX 303-893-0103

RE: Directional Drilling
GMBU 125-36-8-16
Greater Monument Butte (Green River) Unit

Surface Hole: T8S-R16E Section 36: SESE (ML-22061)
672' FSL 818' FEL

At Target: T8S-R16E Section 36: NESE (ML-22061)
1439' FSL 721' FEL

Duchesne County, Utah

Dear Ms. Mason:

Pursuant to the filing by Newfield Production Company (NPC) of an Application for Permit to Drill the above referenced well dated 1/16/14, a copy of which is attached, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole and target locations of this well are both within the boundaries of the Greater Monument Butte Unit (UTU-87538X), of which Newfield certifies that it is the operator. Further, Newfield certifies that all lands within 460 feet of the entire directional well bore are within the Greater Monument Butte Unit.

NPC is permitting this well as a directional well in order to mitigate surface disturbance by utilizing pre-existing roads and pipelines.

NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please contact the undersigned at 303-383-4121 or by email at lburget@newfield.com. Your consideration in this matter is greatly appreciated.

Sincerely,
Newfield Production Company


A handwritten signature in blue ink that reads "Leslie Burget". The signature is written in a cursive, flowing style.

Leslie Burget
Land Associate

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS AND MINING					FORM 3 AMENDED REPORT <input type="checkbox"/>					
APPLICATION FOR PERMIT TO DRILL					1. WELL NAME and NUMBER GMBU 125-38-8-16					
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>					3. FIELD OR WILDCAT MONUMENT BUTTE					
4. TYPE OF WELL Oil Well Coalbed Methane Well:NO					5. UNIT or COMMUNITIZATION AGREEMENT NAME GMBU (GRRV)					
6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY					7. OPERATOR PHONE 435 846-4825					
8. ADDRESS OF OPERATOR Rt 3 Box 3630 . Myton, UT 84052					9. OPERATOR E-MAIL mcrozier@newfield.com					
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) ML-22061			11. MINERAL OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>		12. SURFACE OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>					
13. NAME OF SURFACE OWNER (if box 12 = 'fee')					14. SURFACE OWNER PHONE (if box 12 = 'fee')					
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')					16. SURFACE OWNER E-MAIL (if box 12 = 'fee')					
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')			18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>		19. SLANT VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>					
20. LOCATION OF WELL		FOOTAGES		QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN		
LOCATION AT SURFACE		672FSL818FEL		SESE	36	8 0S	16 0E	S		
Top of Uppermost Producing Zone		1095FSL771FEL		SESE	36	8 0S	16 0E	S		
At Total Depth		1439FSL721FEL		NESE	36	8 0S	16 0E	S		
21. COUNTY DUCHESNE			22. DISTANCE TO NEAREST LEASE LINE (Feet) 721		23. NUMBER OF ACRES IN DRILLING UNIT 10					
			25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 611		26. PROPOSED DEPTH MD:6178 TVD 6122					
27. ELEVATION - GROUND LEVEL 5334			28. BOND NUMBER B001834		29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 437478					
Hole, Casing, and Cement Information										
String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement	Sacks	Yield	Weight
Surf	12 25	8 625	0 - 300	24 0	J-55 ST&C	8 3	Class G	138	1 17	15 8
Prod	7 875	5.5	0 - 6178	15.5	J-55 LT&C	8 3	Premium Lite High Strength	289	3 26	11 0
							50/50 Poz	363	1 24	14 3
ATTACHMENTS										
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES										
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER					<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN					
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)					<input type="checkbox"/> FORM 5, IF OPERATOR IS OTHER THAN THE LEASE OWNER					
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)					<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP					
NAME Mandie Crozier			TITLE Regulatory Tech			PHONE 435 846-4825				
SIGNATURE			DATE			EMAIL mcrozier@newfield.com				
API NUMBER ASSIGNED			APPROVAL							


T8S, R16E, S.L.B.&M.

NEWFIELD EXPLORATION COMPANY

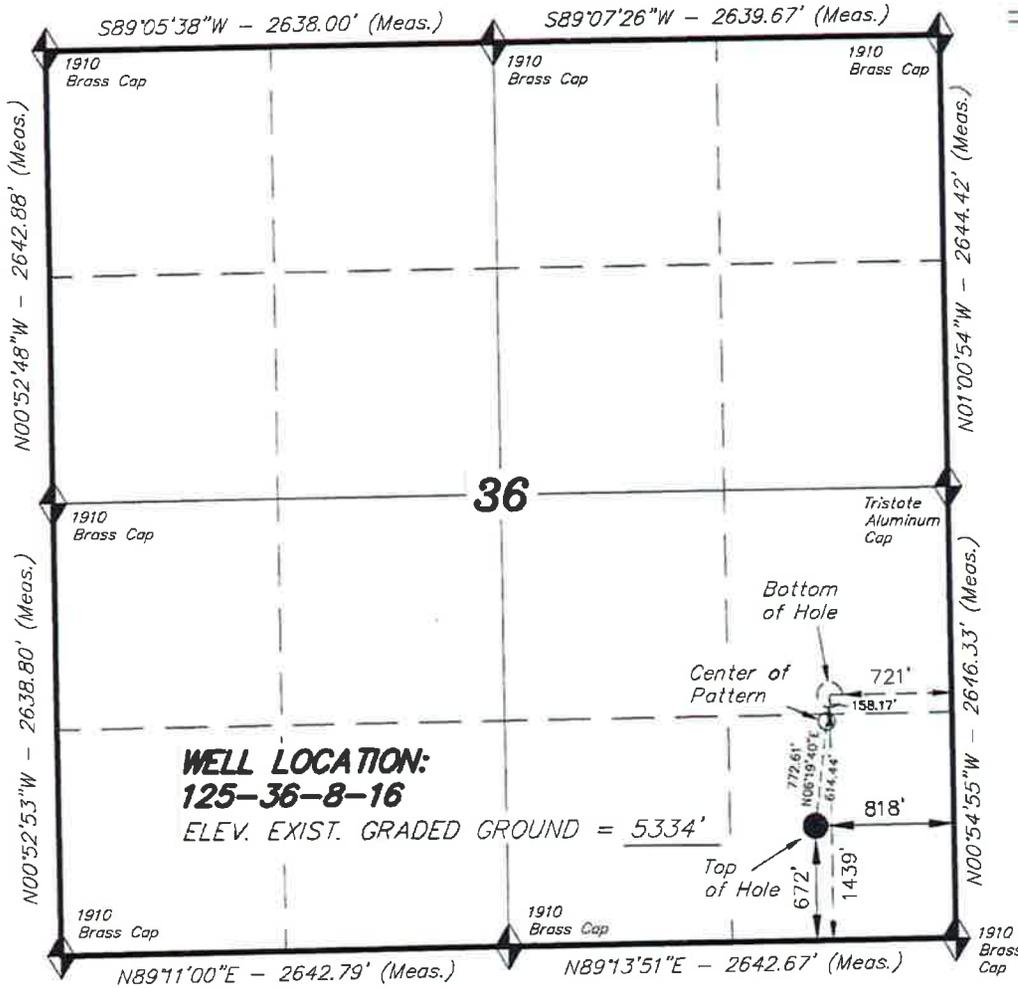

WELL LOCATION, 125-36-8-16,
 LOCATED AS SHOWN IN THE SE 1/4
 SE 1/4 OF SECTION 36, T8S, R16E,
 S.L.B.&M. DUCHESNE COUNTY, UTAH.


TARGET BOTTOM HOLE, 125-36-8-16,
 LOCATED AS SHOWN IN THE NE 1/4
 SE 1/4 OF SECTION 36, T8S, R16E,
 S.L.B.&M. DUCHESNE COUNTY, UTAH.

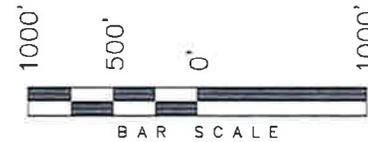

NOTES:

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.
3. The Center of Pattern footages are 1282' FSL & 738' FEL.

THIS IS TO CERTIFY THAT THE ABOVE PLAN WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION, THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

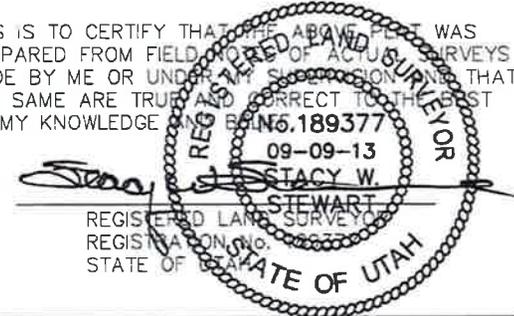

◆ = SECTION CORNERS LOCATED


BASIS OF ELEV; Elevations are based on an N.G.S. OPUS Correction. LOCATION: LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

NAD 83 (SURFACE LOCATION)	
LATITUDE = 40°04'08.24"	
LONGITUDE = 110°03'40.55"	
NAD 27 (SURFACE LOCATION)	
LATITUDE = 40°04'08.38"	
LONGITUDE = 110°03'38.01"	
NAD 83 (CENTER OF PATTERN)	NAD 83 (BOTTOM HOLE LOCATION)
LATITUDE = 40°04'14.27"	LATITUDE = 40°04'15.82"
LONGITUDE = 110°03'39.56"	LONGITUDE = 110°03'39.30"
NAD 27 (CENTER OF PATTERN)	NAD 27 (BOTTOM HOLE LOCATION)
LATITUDE = 40°04'14.40"	LATITUDE = 40°04'15.95"
LONGITUDE = 110°03'37.01"	LONGITUDE = 110°03'36.76"

TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
 (435) 781-2501

DATE SURVEYED: 07-29-13	SURVEYED BY: G.D.O.	VERSION:
DATE DRAWN: 09-09-13	DRAWN BY: F.T.M.	V2
REVISED:	SCALE: 1" = 1000'	

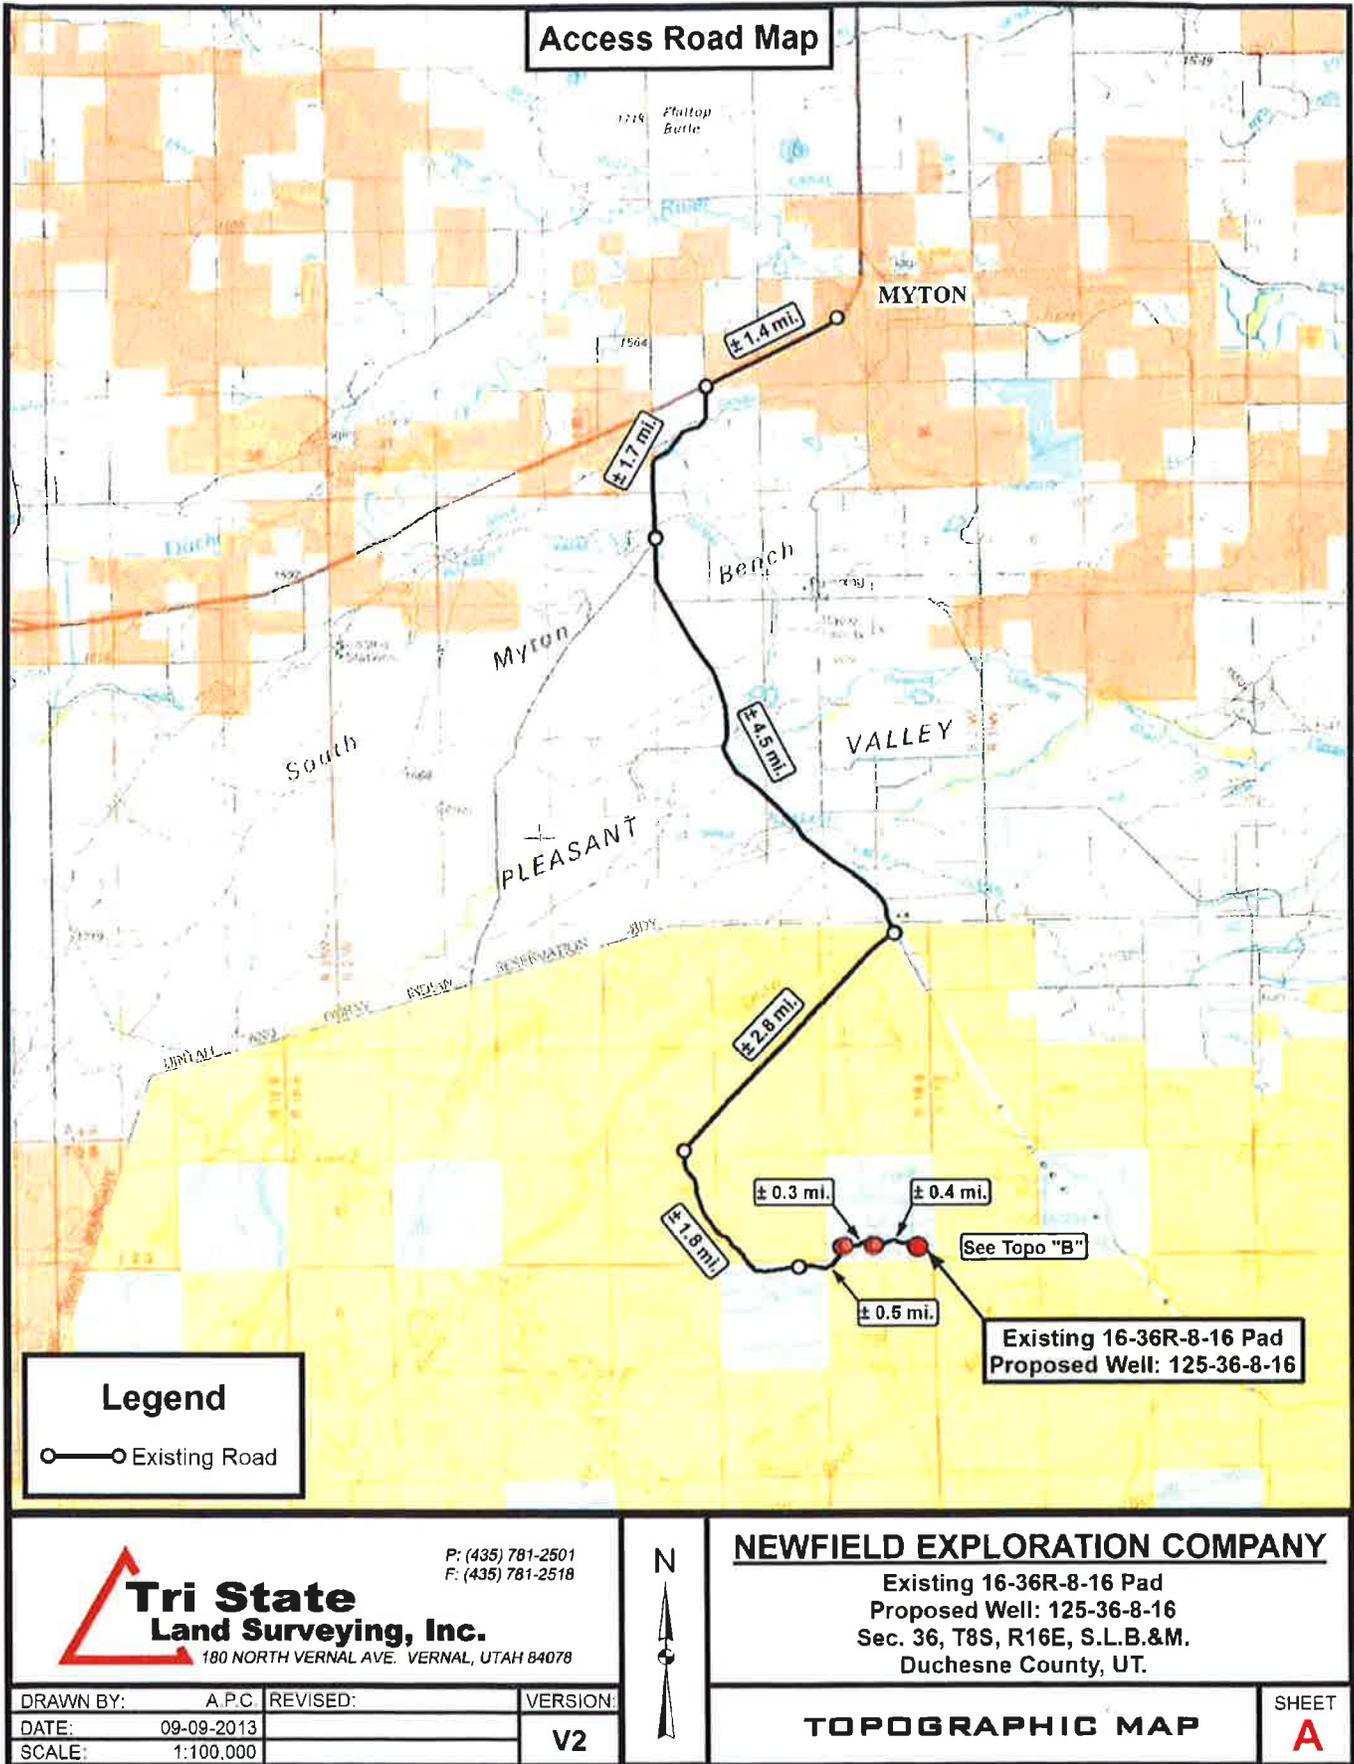

Access Road Map

Legend

○—○ Existing Road

Existing 16-36R-8-16 Pad
Proposed Well: 125-36-8-16

Tri State Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518




NEWFIELD EXPLORATION COMPANY
Existing 16-36R-8-16 Pad
Proposed Well: 125-36-8-16
Sec. 36, T8S, R16E, S.L.B.&M.
Duchesne County, UT.

DRAWN BY:	A.P.C.	REVISED:	VERSION:
DATE:	09-09-2013		V2
SCALE:	1:100,000		

TOPOGRAPHIC MAP

SHEET
A

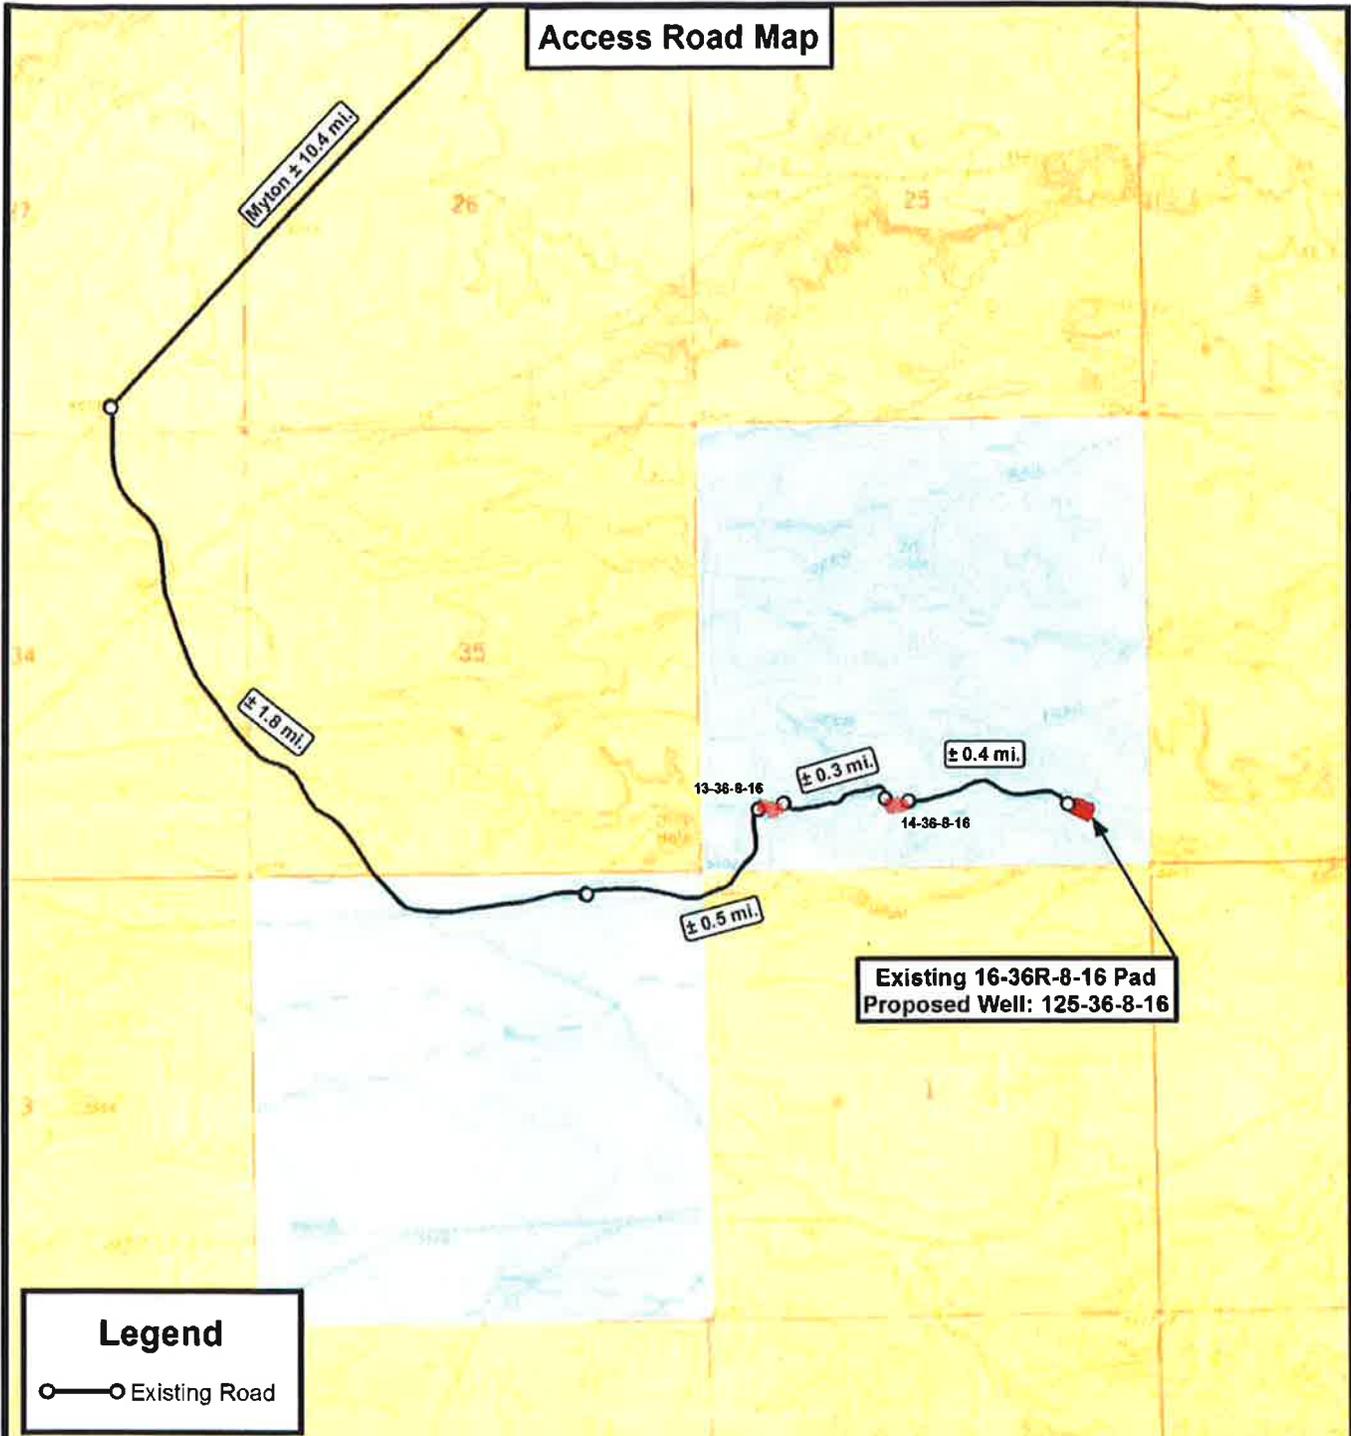

Legend

○—○ Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
 F: (435) 781-2518

DRAWN BY:	A.P.C.	REVISED:	09-09-13 A.P.C.	VERSION:
DATE:	08-14-2013			V2
SCALE:	1" = 2,000'			

NEWFIELD EXPLORATION COMPANY

Existing 16-36R-8-16 Pad
 Proposed Well: 125-36-8-16
 Sec. 36, T8S, R16E, S.L.B.&M.
 Duchesne County, UT.

TOPOGRAPHIC MAP

SHEET **B**

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
440 West 200 South, Suite 500
Salt Lake City, UT 84101

IN REPLY REFER TO:
3160
(UT-922)

January 23, 2014

Memorandum

To: Assistant Field Office Manager Minerals,
Vernal Field Office

From: Michael Coulthard, Petroleum Engineer

Subject: 2014 Plan of Development Greater Monument
Butte Unit, Duchesne and Uintah Counties,
Utah.

Pursuant to email between Diana Mason, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2014 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

API #	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-52776	GMBU R-9-9-16	Sec 09 T09S R16E 0759 FSL 1990 FWL
		BHL Sec 09 T09S R16E 1543 FSL 2476 FEL
43-013-52777	GMBU C-16-9-16	Sec 09 T09S R16E 0741 FSL 1980 FWL
		BHL Sec 16 T09S R16E 0147 FNL 2542 FEL
43-013-52778	GMBU S-14-9-16	Sec 14 T09S R16E 0636 FSL 0803 FEL
		BHL Sec 14 T09S R16E 1339 FSL 1352 FEL
43-013-52779	GMBU P-13-9-16	Sec 14 T09S R16E 0644 FSL 0783 FEL
		BHL Sec 13 T09S R16E 1541 FSL 0248 FWL
43-013-52780	GMBU 125-36-8-16	Sec 36 T08S R16E 0672 FSL 0818 FEL
		BHL Sec 36 T08S R16E 1439 FSL 0721 FEL
43-013-52781	GMBU 119-32-8-17	Sec 32 T08S R17E 1909 FNL 1936 FWL
		BHL Sec 32 T08S R17E 2461 FSL 1846 FWL
43-013-52782	GMBU 122-8-9-17	Sec 08 T09S R17E 1875 FSL 2576 FWL
		BHL Sec 08 T09S R17E 1823 FSL 2526 FEL
43-013-52783	GMBU F-20-9-16	Sec 19 T09S R16E 0658 FNL 0367 FEL
		BHL Sec 20 T09S R16E 1555 FNL 0056 FWL
43-013-52784	GMBU M-20-9-16	Sec 20 T09S R16E 2157 FSL 2187 FWL
		BHL Sec 20 T09S R16E 2492 FNL 2536 FEL
43-013-52785	GMBU B-29-9-16	Sec 20 T09S R16E 0694 FSL 1945 FEL
		BHL Sec 29 T09S R16E 0161 FNL 1102 FEL

API #	WELL NAME	LOCATION						
(Proposed PZ GREEN RIVER)								
43-013-52786	GMBU P-21-9-16	Sec 20	T09S	R16E	0747	FSL	0894	FEL
		BHL Sec 21	T09S	R16E	1531	FSL	0303	FWL
43-013-52787	GMBU C-29-9-16	Sec 20	T09S	R16E	0678	FSL	1960	FEL
		BHL Sec 29	T09S	R16E	0156	FNL	2442	FWL
43-013-52788	GMBU E-28-9-16	Sec 20	T09S	R16E	0731	FSL	0908	FEL
		BHL Sec 28	T09S	R16E	0139	FNL	0245	FWL
43-013-52789	GMBU C-27-9-16	Sec 22	T09S	R16E	0506	FSL	2027	FWL
		BHL Sec 27	T09S	R16E	0083	FNL	2497	FEL
43-013-52790	GMBU D-27-9-16	Sec 22	T09S	R16E	0495	FSL	2009	FWL
		BHL Sec 27	T09S	R16E	0070	FNL	1048	FWL
43-013-52791	GMBU K-22-9-16	Sec 23	T09S	R16E	2151	FSL	0806	FWL
		BHL Sec 22	T09S	R16E	2441	FNL	0340	FEL
43-013-52792	GMBU N-23-9-16	Sec 23	T09S	R16E	2170	FSL	0816	FEL
		BHL Sec 23	T09S	R16E	2508	FNL	1457	FWL
43-013-52793	GMBU I-10-9-17	Sec 10	T09S	R17E	0830	FNL	0756	FEL
		BHL Sec 10	T09S	R17E	1576	FNL	1431	FEL
43-013-52794	GMBU F-11-9-17	Sec 10	T09S	R17E	0846	FNL	0742	FEL
		BHL Sec 11	T09S	R17E	1557	FNL	0389	FWL
43-047-54253	GMBU R-11-9-17	Sec 11	T09S	R17E	2002	FSL	1995	FWL
		BHL Sec 11	T09S	R17E	0934	FSL	2033	FEL

This office has no objection to permitting the wells at this time.

bcc: File - Greater Monument Butte Unit
 Division of Oil Gas and Mining
 Central Files
 Agr. Sec. Chron
 Fluid Chron

MCoulthard:mc:1-23-14





Project: USGS Myton SW (UT)
 Site: SECTION 9 T9S, R16E
 Well: R-9-9-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.04°

Magnetic Field
 Strength: 52027.3snT
 Dip Angle: 65.72°
 Date: 10/10/2013
 Model: IGRF2010

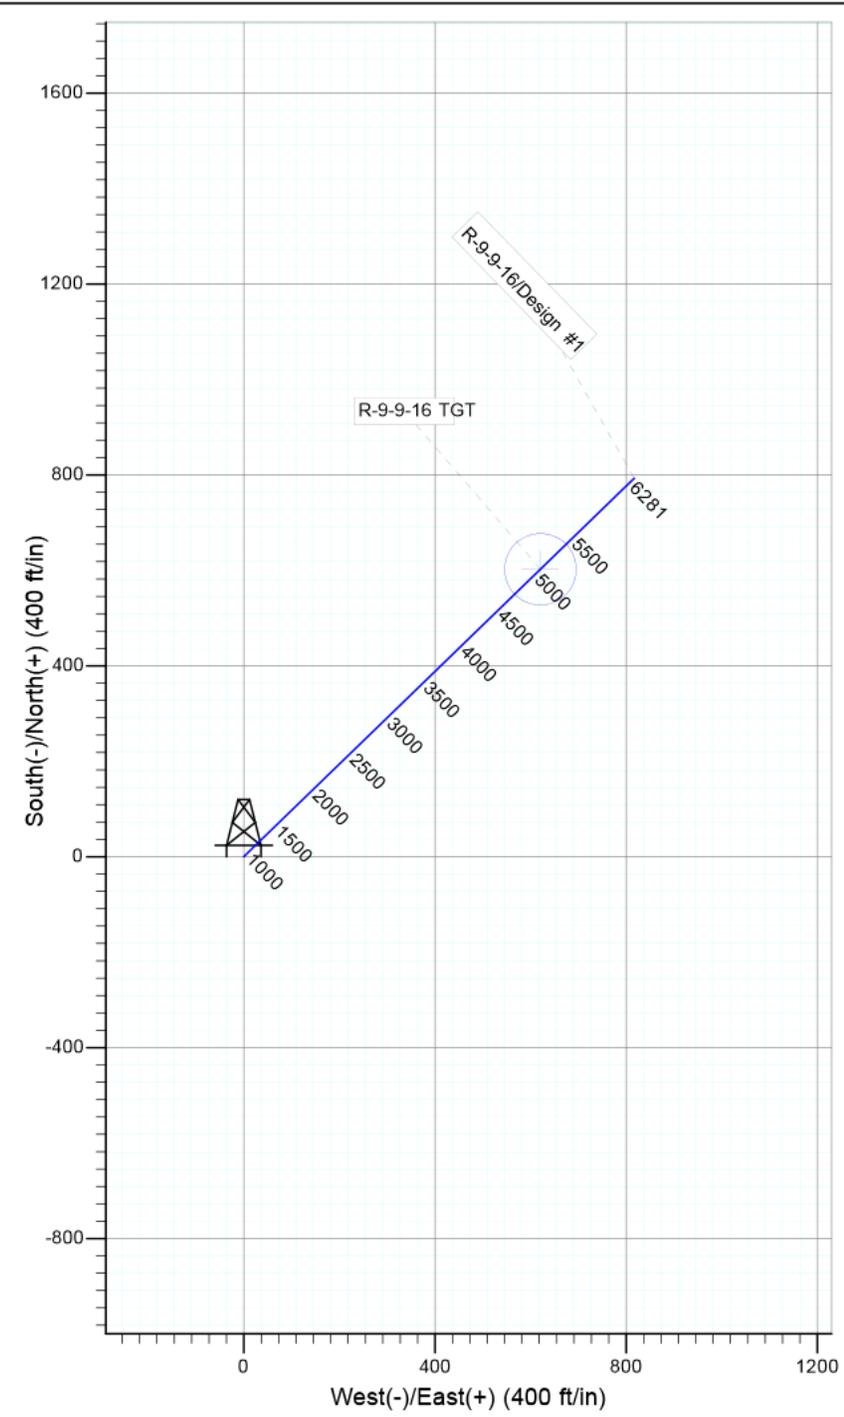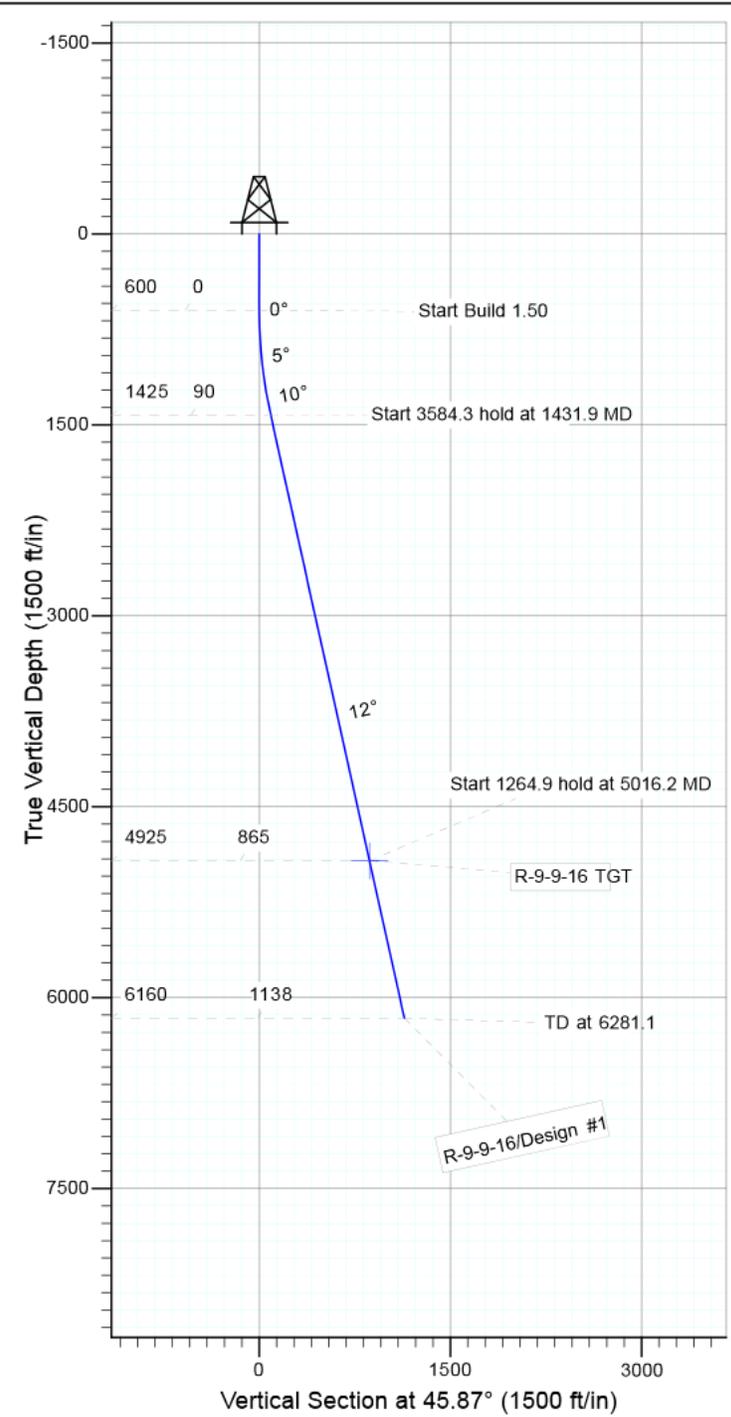

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
R-9-9-16 TGT	4925.0	602.1	620.6	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1431.9	12.48	45.87	1425.4	62.8	64.8	1.50	45.87	90.2	
4	5016.2	12.48	45.87	4925.0	602.1	620.6	0.00	0.00	864.7	R-9-9-16 TGT
5	6281.1	12.48	45.87	6160.0	792.5	816.8	0.00	0.00	1138.1	







Project: USGS Myton SW (UT)
 Site: SECTION 9 T9S, R16E
 Well: C-16-9-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.04°

Magnetic Field
 Strength: 52027.2snT
 Dip Angle: 65.72°
 Date: 10/10/2013
 Model: IGRF2010

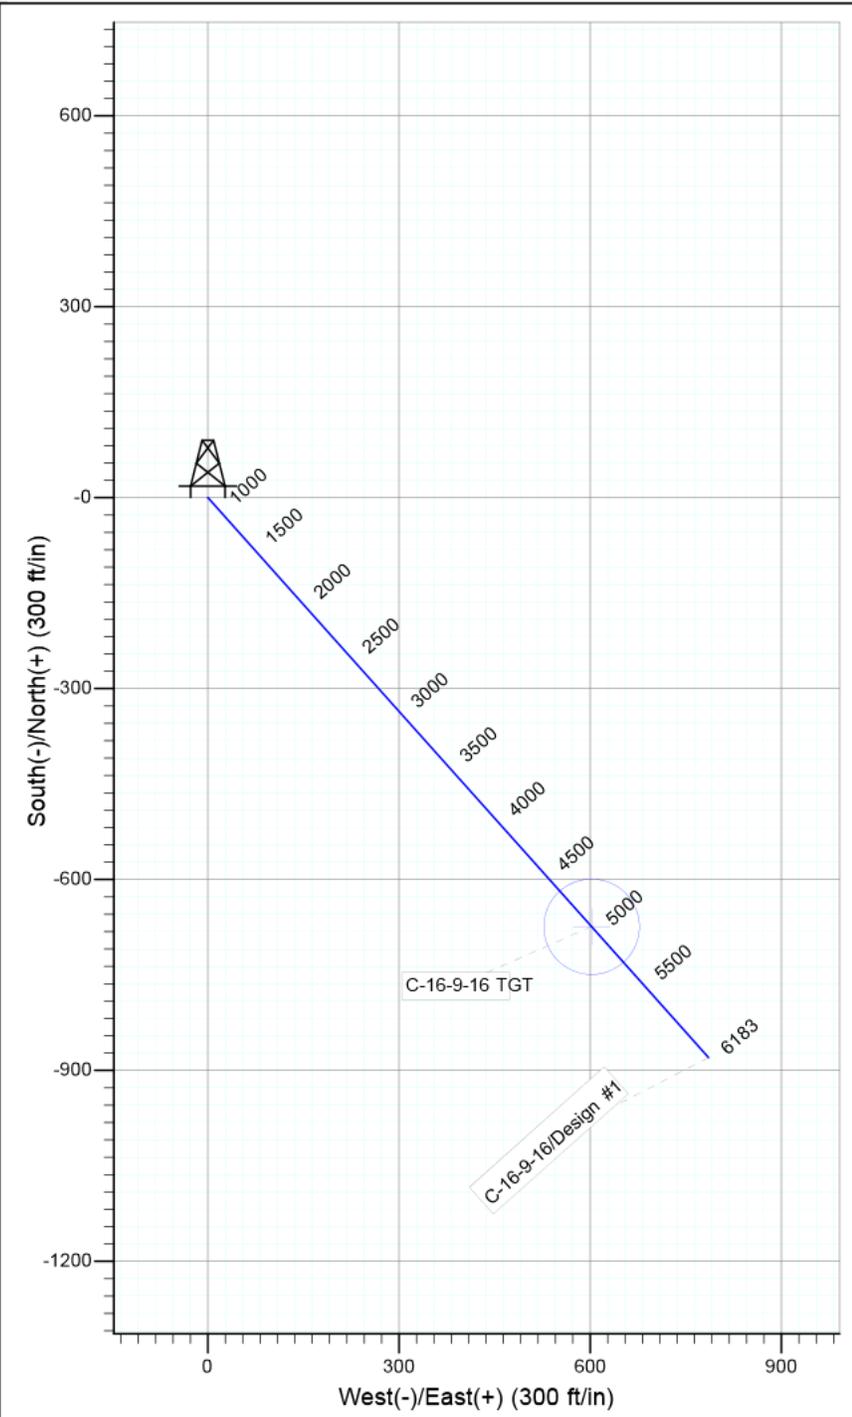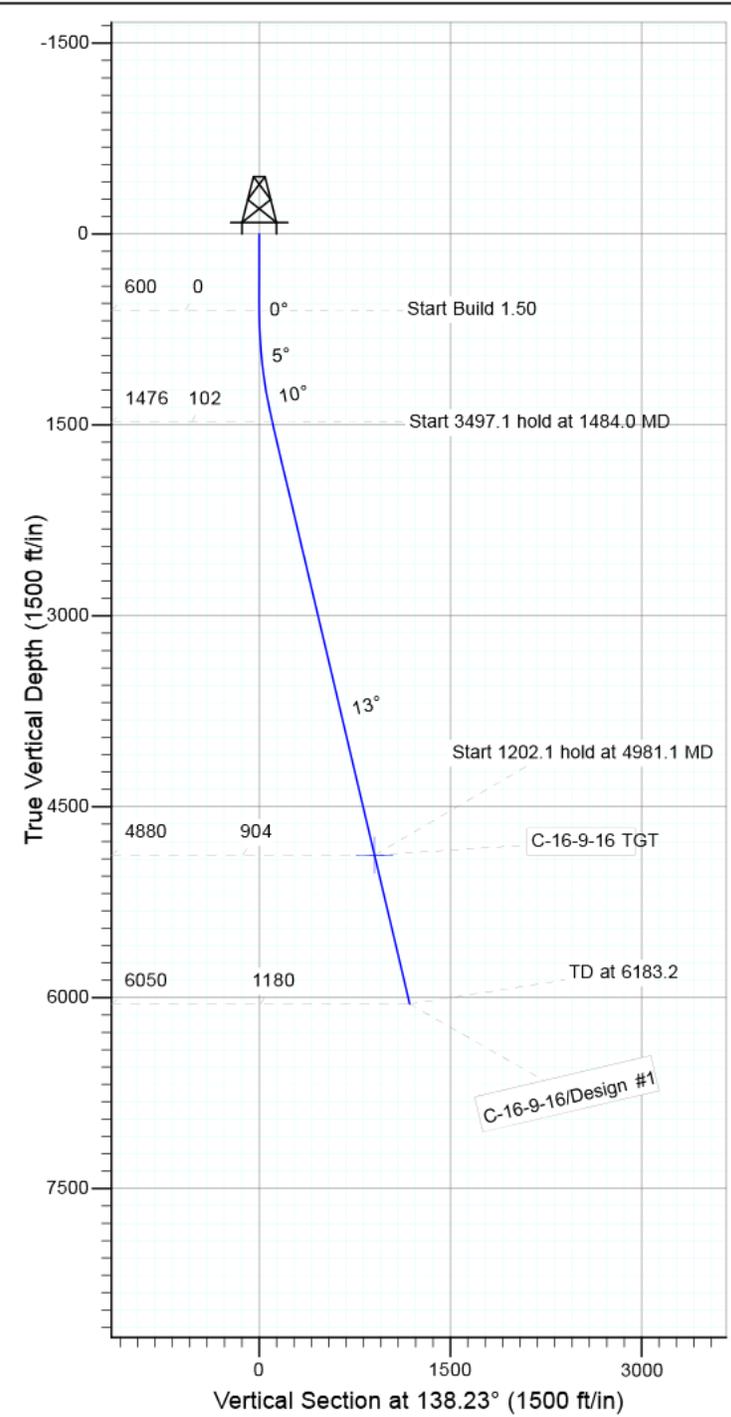

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
C-16-9-16 TGT	4880.0	-674.2	602.2	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1484.0	13.26	138.23	1476.2	-76.0	67.8	1.50	138.23	101.8	
4	4981.1	13.26	138.23	4880.0	-674.2	602.2	0.00	0.00	904.0	C-16-9-16 TGT
5	6183.2	13.26	138.23	6050.0	-879.9	785.9	0.00	0.00	1179.7	







Project: USGS Myton SW (UT)
 Site: SECTION 14 T9S, R16E
 Well: S-14-9-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.02°

Magnetic Field
 Strength: 52028.0snT
 Dip Angle: 65.72°
 Date: 10/7/2013
 Model: IGRF2010

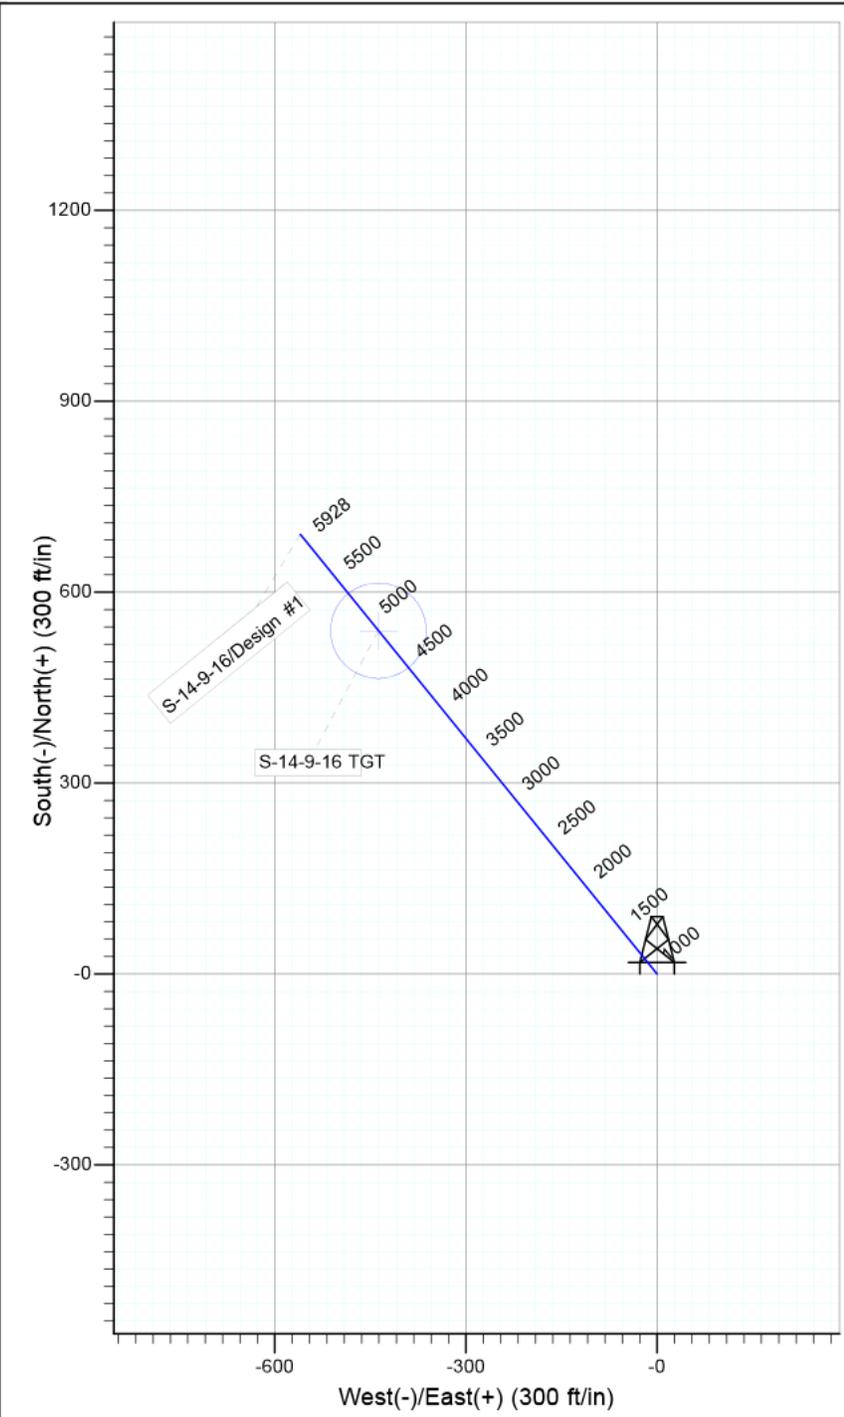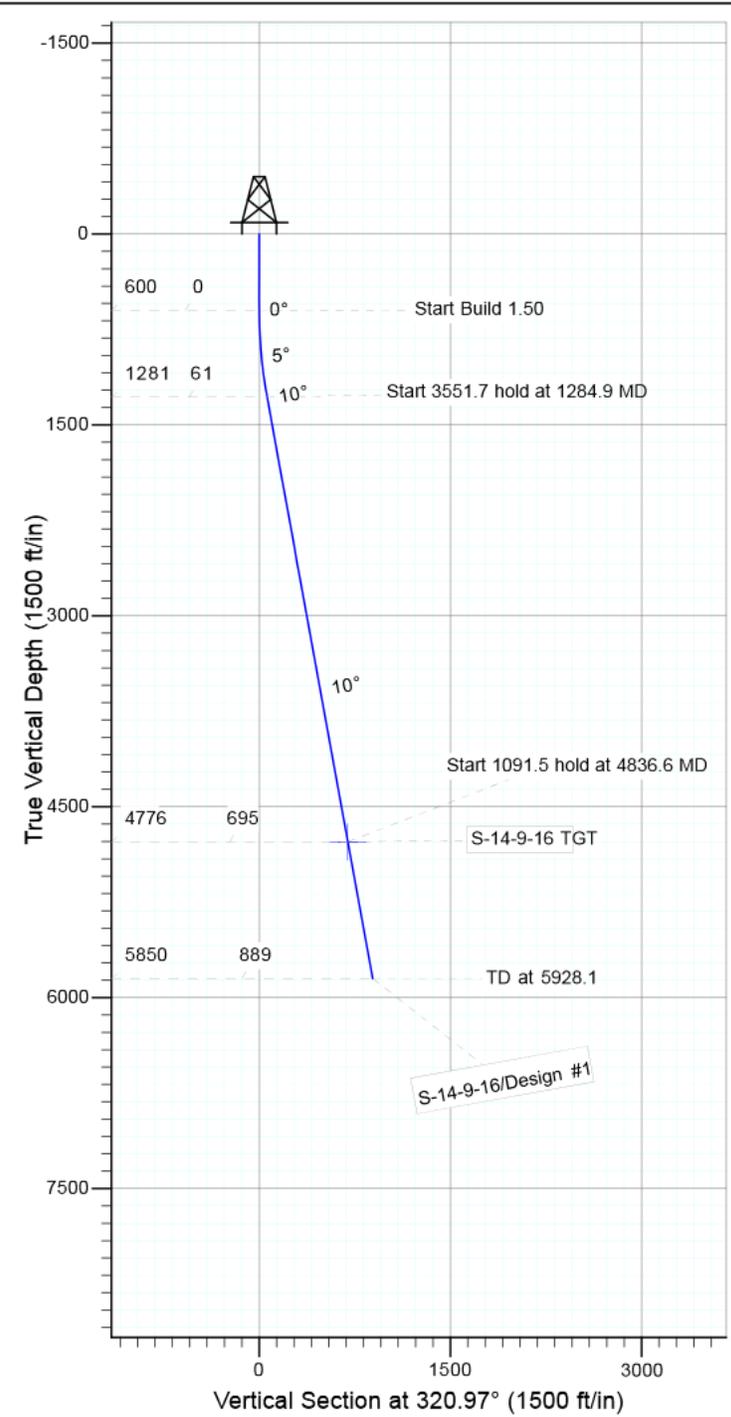

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
S-14-9-16 TGT	4776.0	539.6	-437.4	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1284.9	10.27	320.97	1281.2	47.6	-38.6	1.50	320.97	61.2	
4	4836.6	10.27	320.97	4776.0	539.6	-437.4	0.00	0.00	694.6	S-14-9-16 TGT
5	5928.1	10.27	320.97	5850.0	690.8	-560.0	0.00	0.00	889.3	







Project: USGS Myton SW (UT)
 Site: SECTION 14 T9S, R16E
 Well: P-13-9-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.02°

Magnetic Field
 Strength: 52028.0snT
 Dip Angle: 65.72°
 Date: 10/7/2013
 Model: IGRF2010

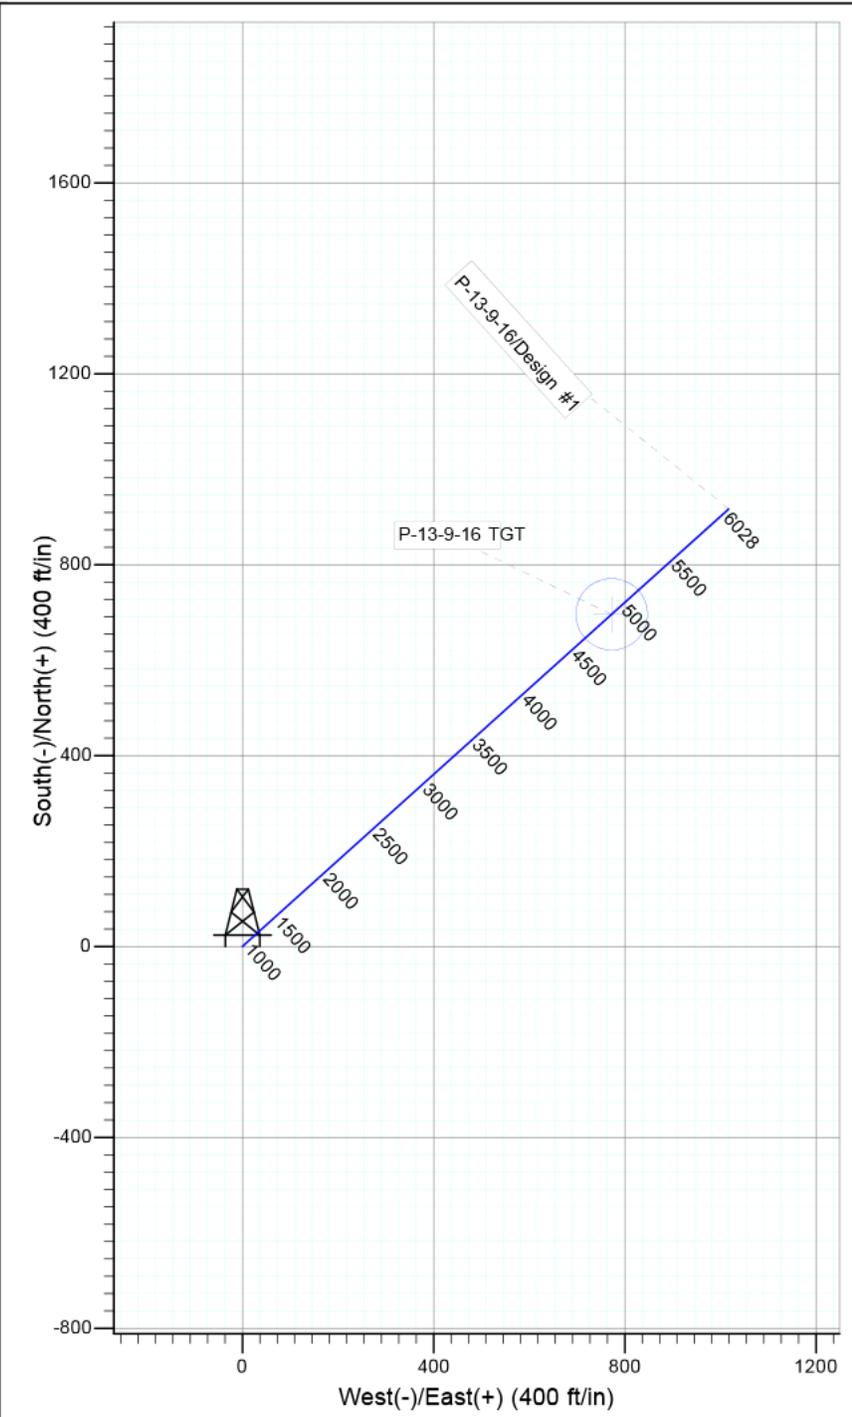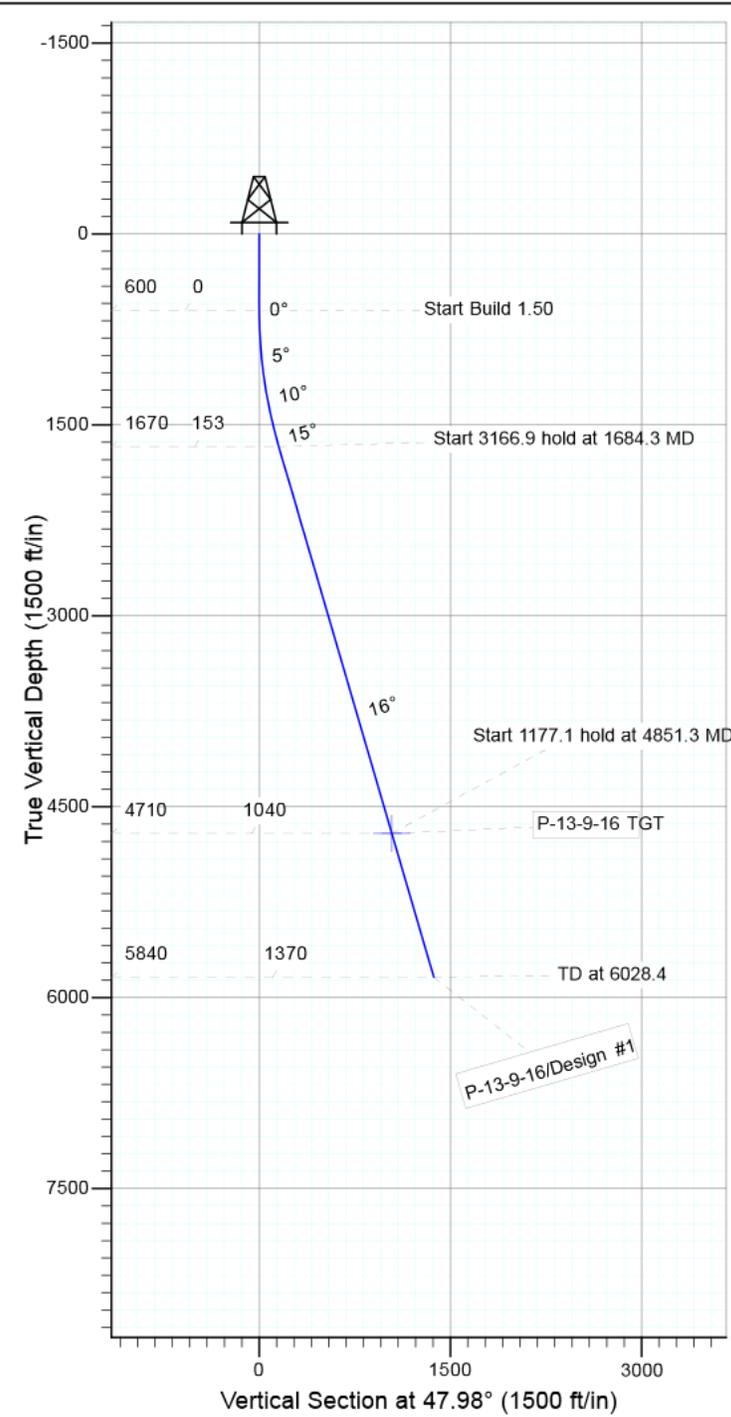

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
P-13-9-16 TGT	4710.0	696.1	772.6	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1684.3	16.26	47.98	1669.8	102.3	113.6	1.50	47.98	152.9	
4	4851.3	16.26	47.98	4710.0	696.1	772.6	0.00	0.00	1039.9	P-13-9-16 TGT
5	6028.4	16.26	47.98	5840.0	916.7	1017.5	0.00	0.00	1369.6	







Project: USGS Myton SW (UT)
 Site: SECTION 36 T8S, R16E
 Well: 125-36-8-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.03°

Magnetic Field
 Strength: 52068.0snT
 Dip Angle: 65.76°
 Date: 8/26/2013
 Model: IGRF2010

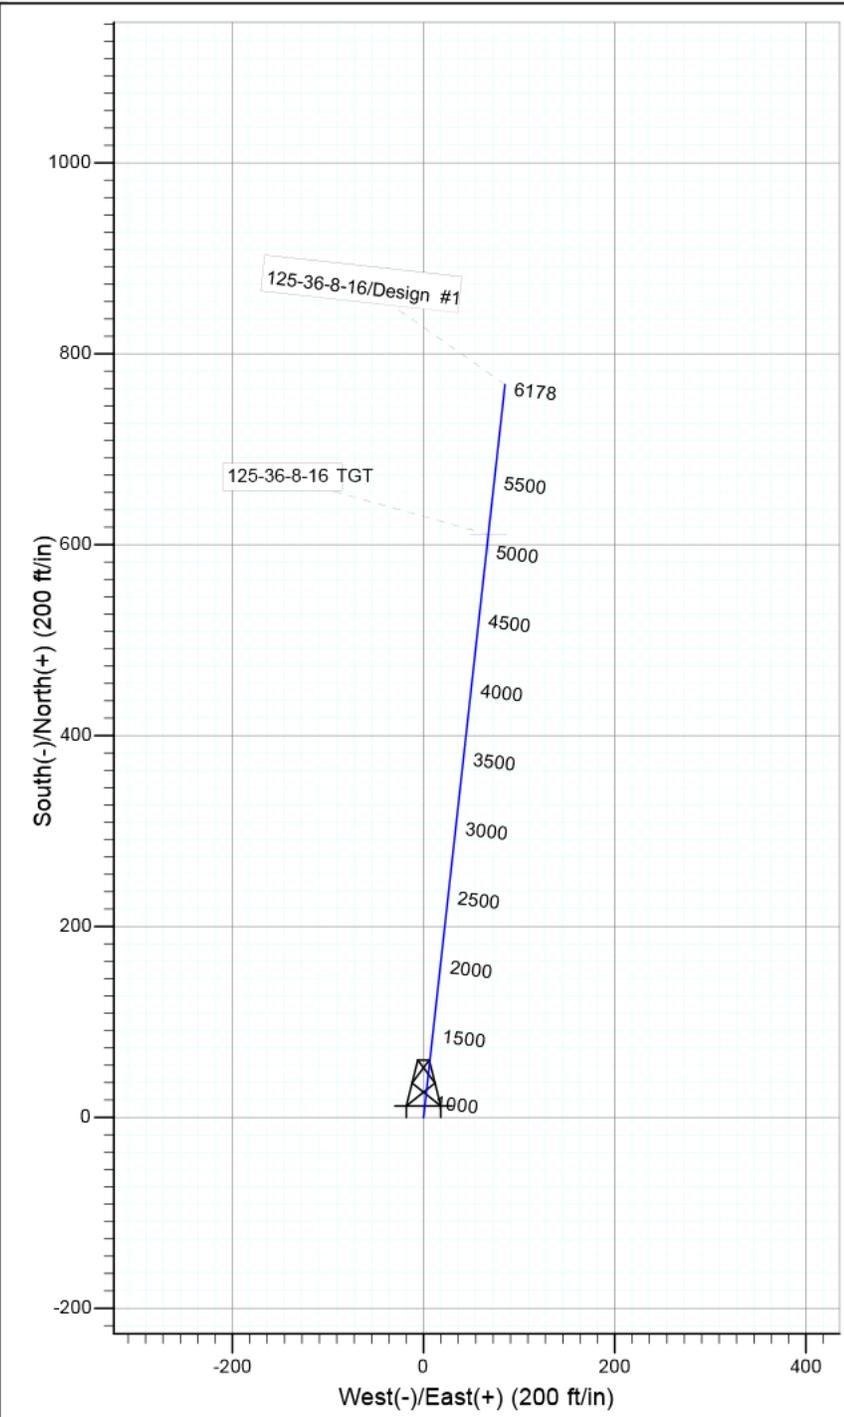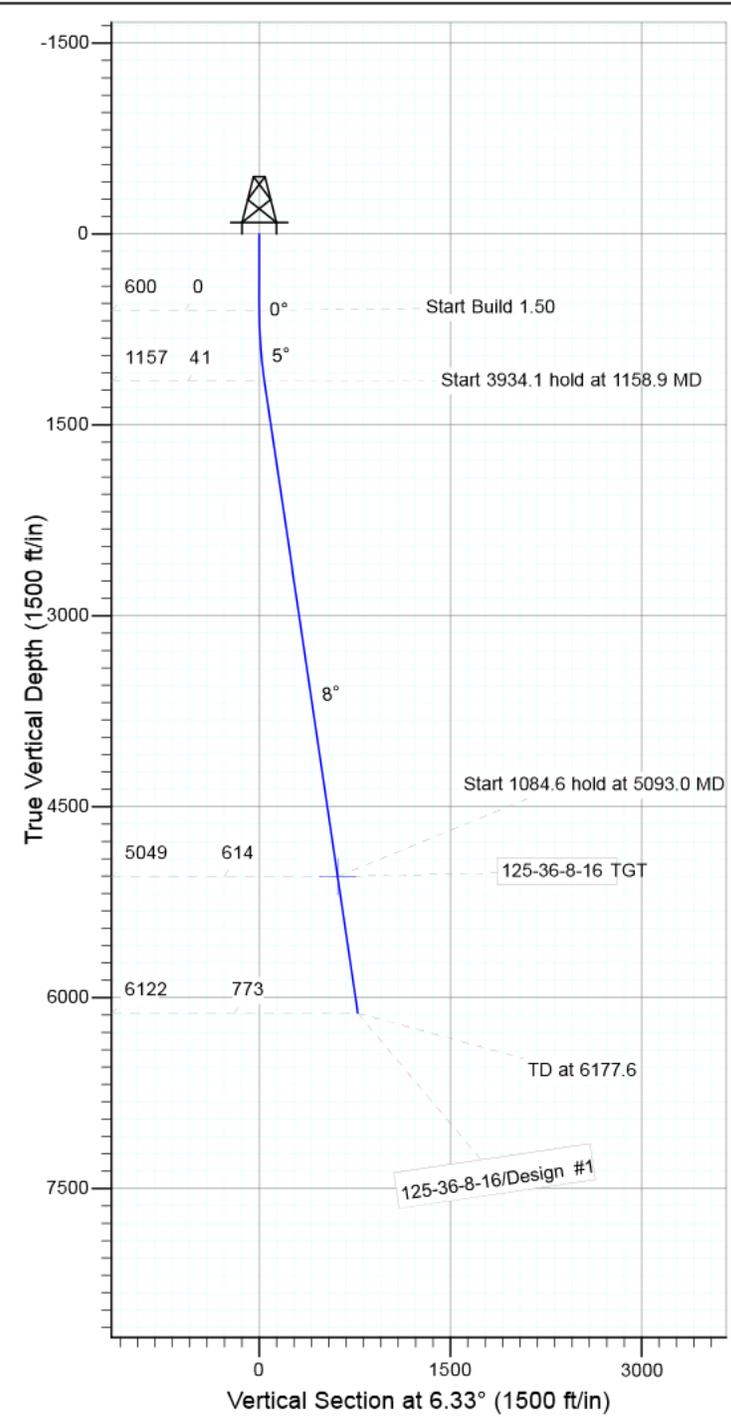

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
125-36-8-16 TGT	5049.0	610.7	67.7	Point

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1158.9	8.38	6.33	1156.9	40.6	4.5	1.50	6.33	40.8	
4	5093.0	8.38	6.33	5049.0	610.7	67.7	0.00	0.00	614.4	125-36-8-16 TGT
5	6177.6	8.38	6.33	6122.0	767.9	85.2	0.00	0.00	772.6	







Project: USGS Myton SW (UT)
 Site: SECTION 32 T8S, R17E
 Well: 119-32-8-17
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.05°

Magnetic Field
 Strength: 52092.8snT
 Dip Angle: 65.78°
 Date: 6/27/2013
 Model: IGRF2010

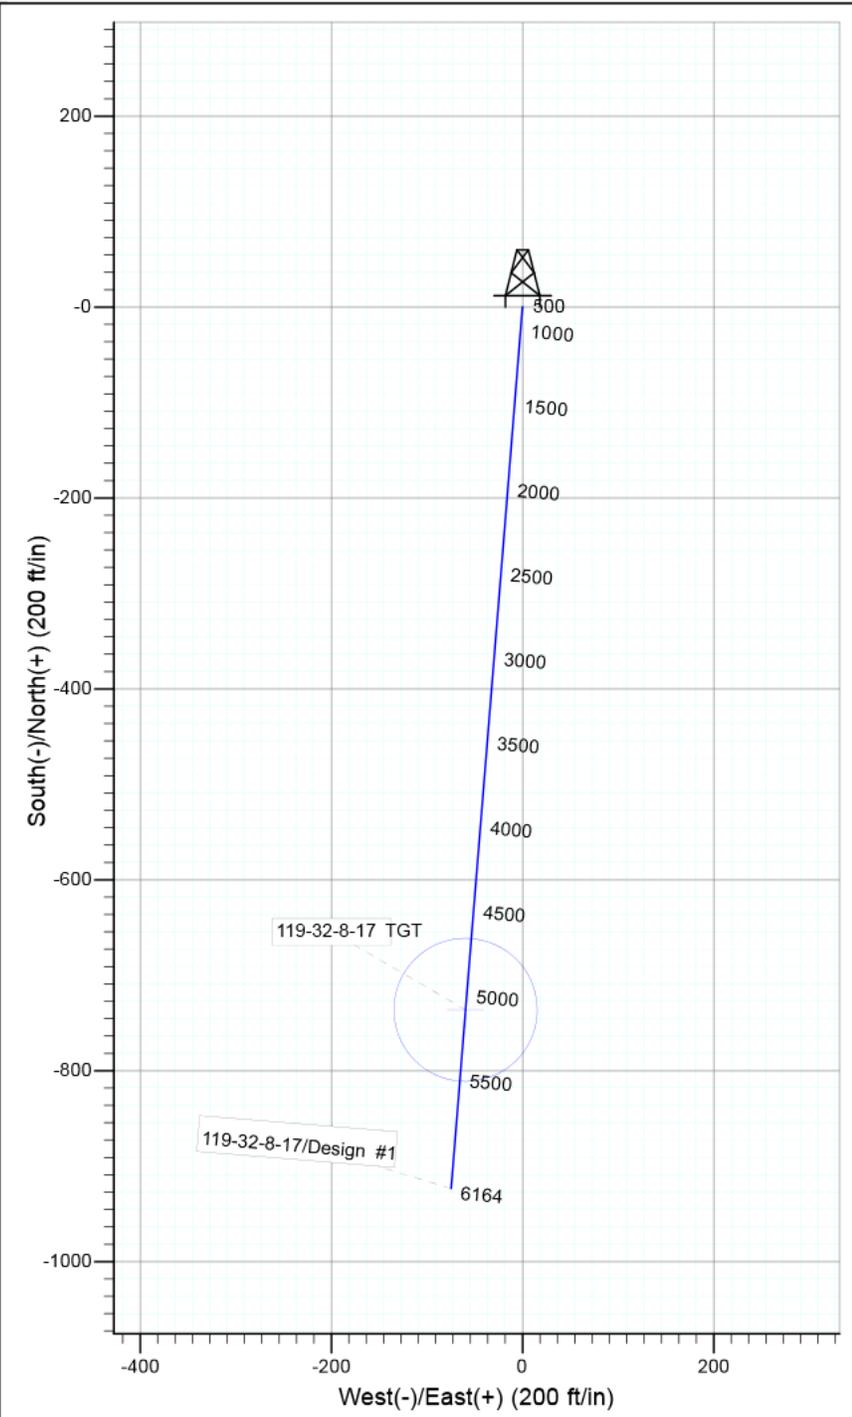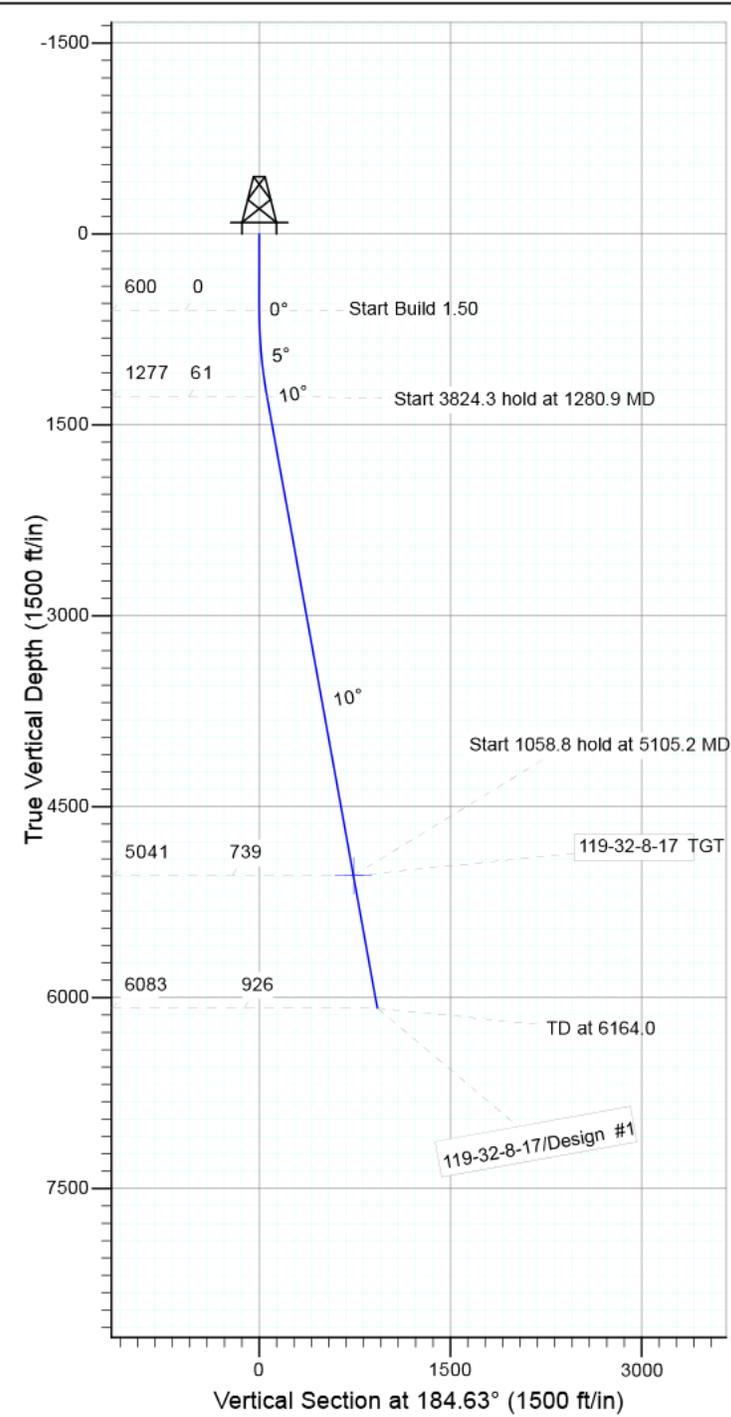

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
119-32-8-17 TGT	5041.0	-736.3	-59.6	Circle (Radius: 75.0)



SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1280.9	10.21	184.63	1277.3	-60.3	-4.9	1.50	184.63	60.5	
4	5105.2	10.21	184.63	5041.0	-736.3	-59.6	0.00	0.00	738.7	119-32-8-17 TGT
5	6164.0	10.21	184.63	6083.0	-923.4	-74.8	0.00	0.00	926.4	





KOP @ 600'
 DOGLEG RATE 1.5 DEG/100
 TARGET RADIUS IS 75'

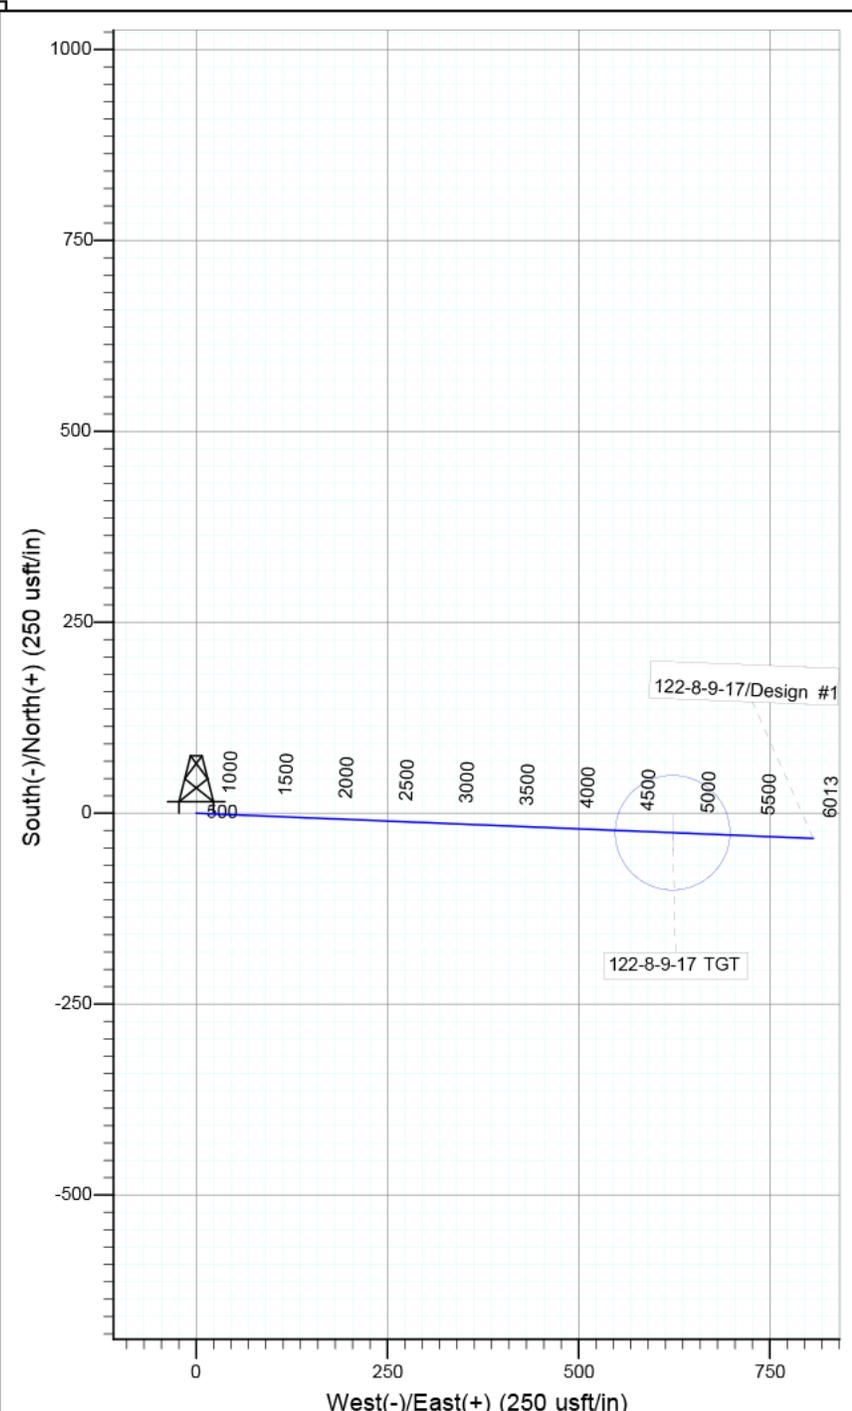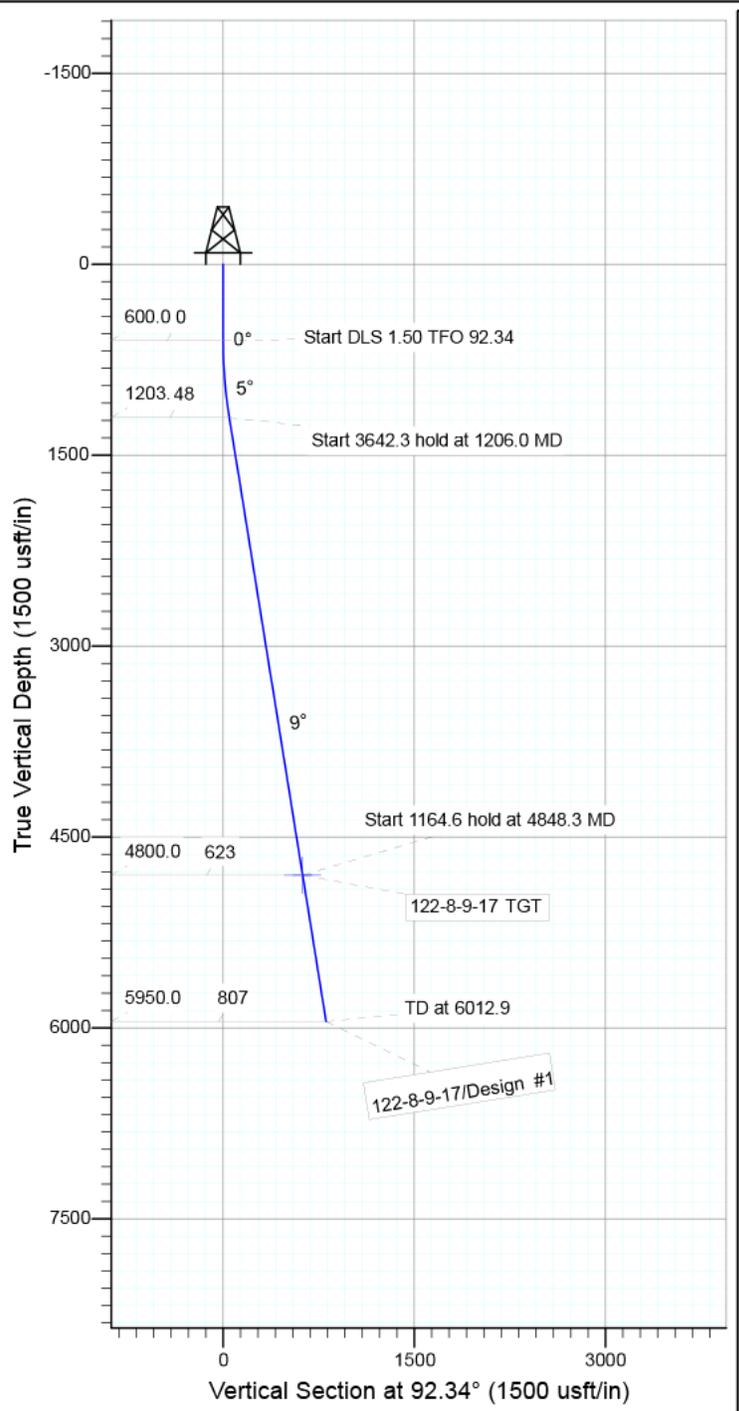

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
122-8-9-17 TGT	4800.0	-25.5	622.9	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1206.0	9.09	92.34	1203.5	-2.0	47.9	1.50	92.34	48.0	
4	4848.3	9.09	92.34	4800.0	-25.5	622.9	0.00	0.00	623.4	122-8-9-17 TGT
5	6012.9	9.09	92.34	5950.0	-33.0	806.7	0.00	0.00	807.4	







Project: USGS Myton SW (UT)
 Site: SECTION 19 T9S, R16E
 Well: F-20-9-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.05°

Magnetic Field
 Strength: 52008.0snT
 Dip Angle: 65.70°
 Date: 10/21/2013
 Model: IGRF2010

KOP @ 600'
DOGLEG RATE 1.5 DEG/100'
TARGET RADIUS IS 75'

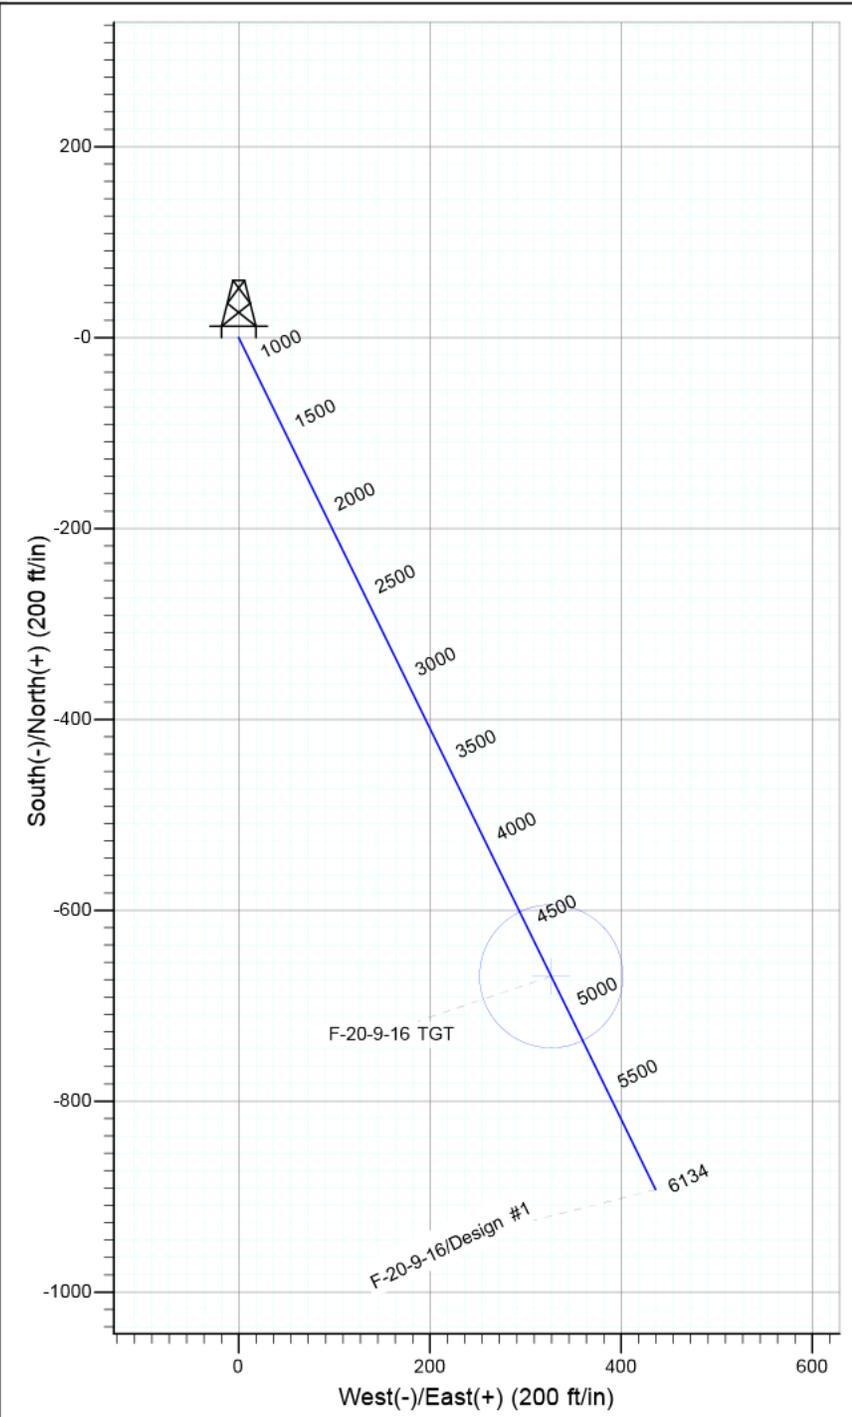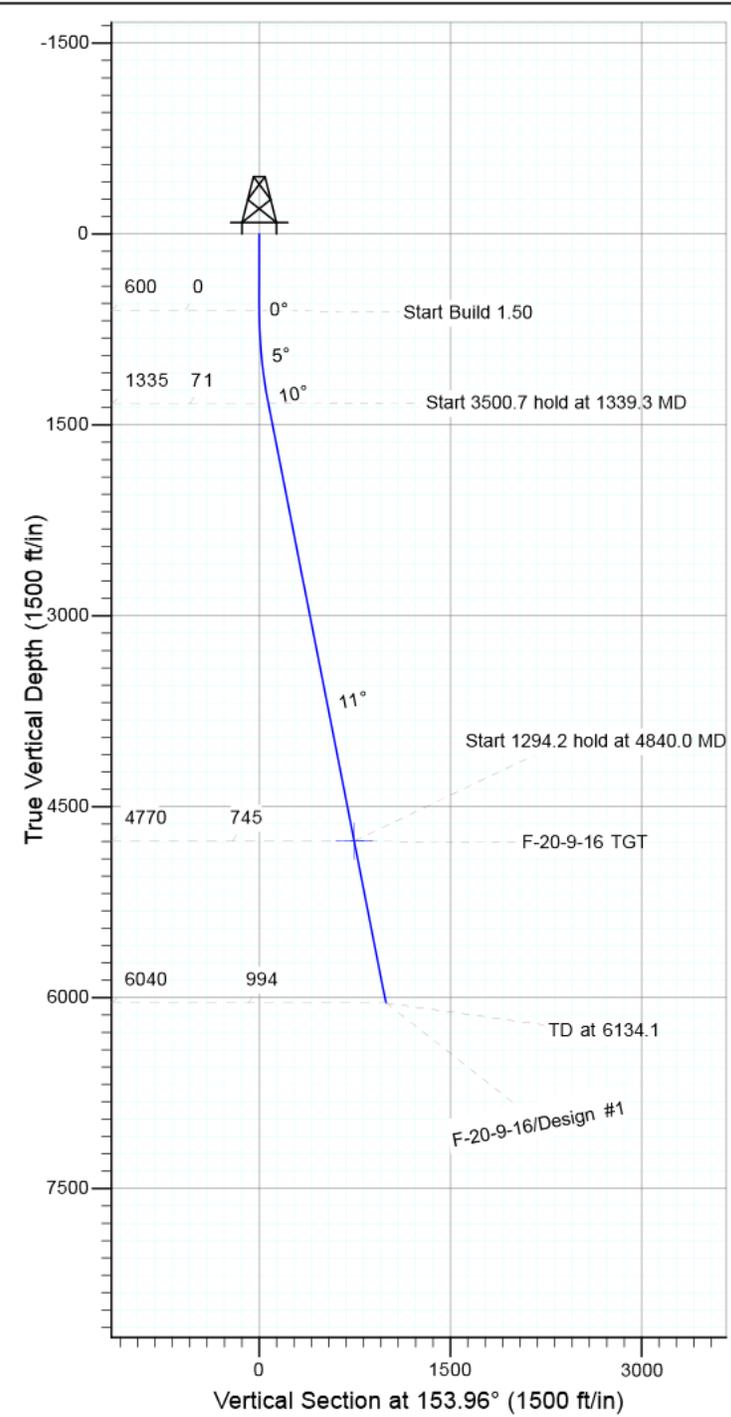

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
F-20-9-16 TGT	4770.0	-669.0	326.9	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1339.3	11.09	153.96	1334.7	-64.1	31.3	1.50	153.96	71.3	
4	4840.0	11.09	153.96	4770.0	-669.0	326.9	0.00	0.00	744.6	F-20-9-16 TGT
5	6134.1	11.09	153.96	6040.0	-892.7	436.2	0.00	0.00	993.5	







Project: USGS Myton SW (UT)
 Site: SECTION 20 T9, R16
 Well: M-20-9-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.05°

Magnetic Field
 Strength: 52011.1snT
 Dip Angle: 65.70°
 Date: 9/30/2013
 Model: IGRF2010

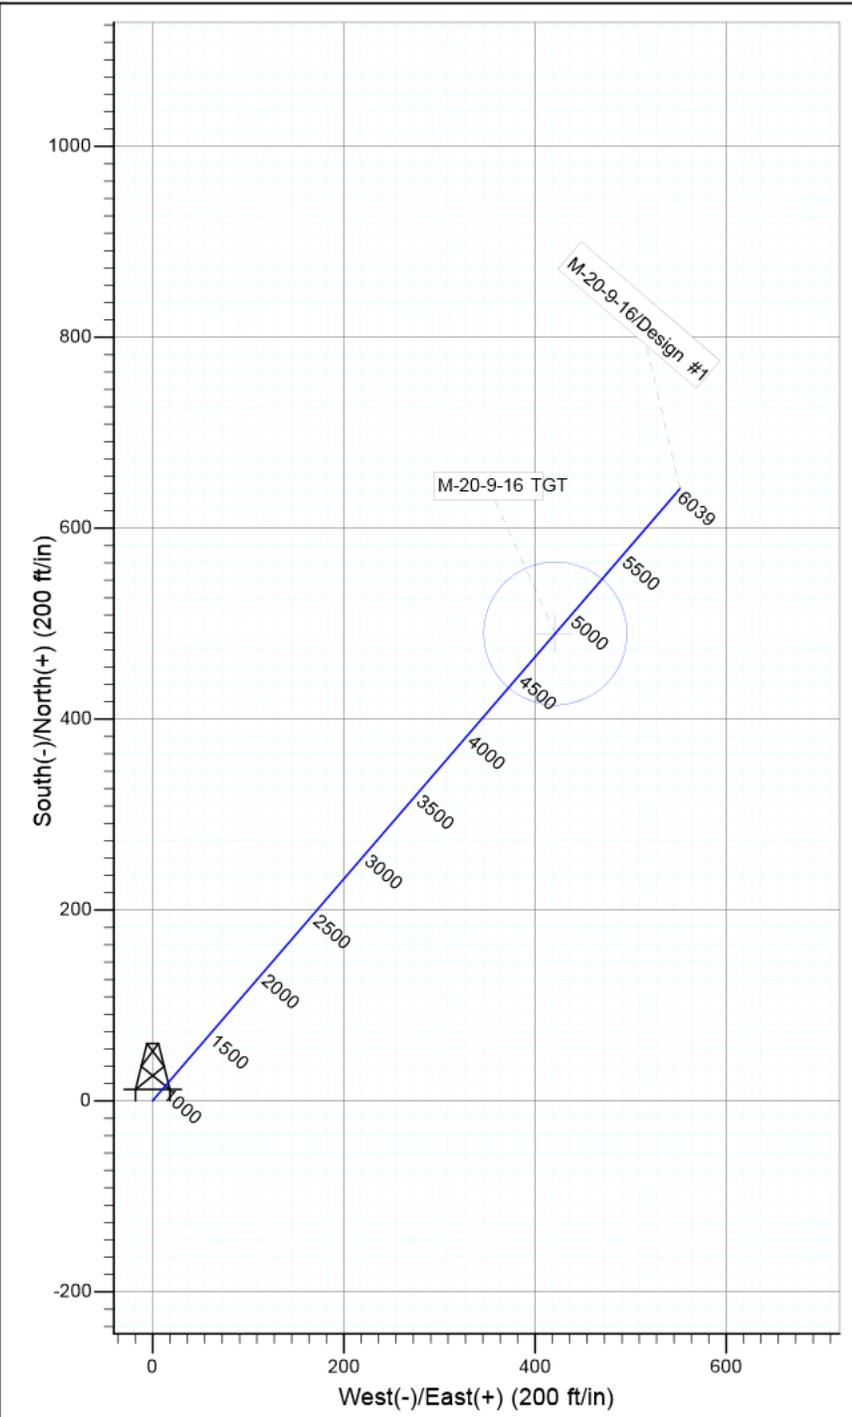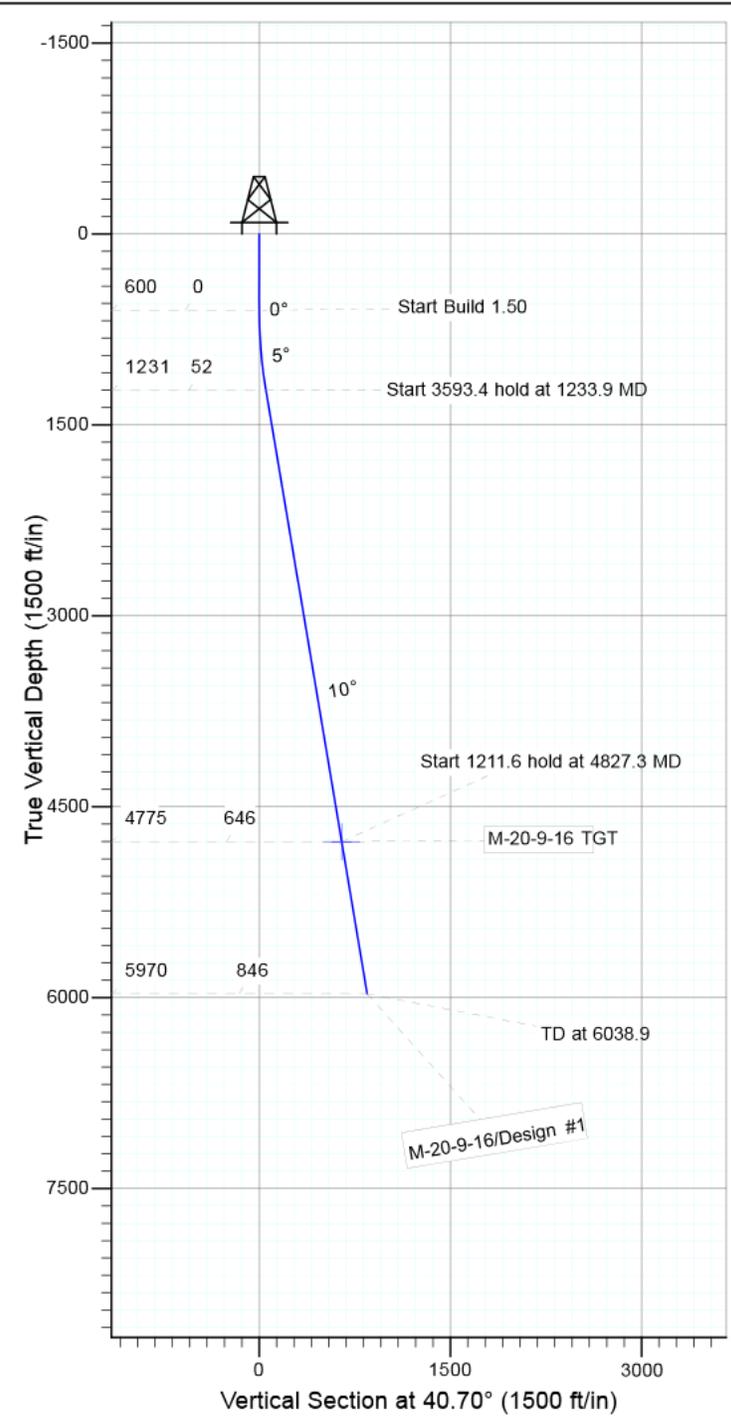

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
M-20-9-16 TGT	4775.0	489.8	421.3	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1233.9	9.51	40.70	1231.0	39.8	34.2	1.50	40.70	52.5	
4	4827.3	9.51	40.70	4775.0	489.8	421.3	0.00	0.00	646.0	M-20-9-16 TGT
5	6038.9	9.51	40.70	5970.0	641.5	551.8	0.00	0.00	846.2	







Project: USGS Myton SW (UT)
 Site: SECTION 20 T9, R16
 Well: B-29-9-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.04°

Magnetic Field
 Strength: 52007.0snT
 Dip Angle: 65.69°
 Date: 10/9/2013
 Model: IGRF2010

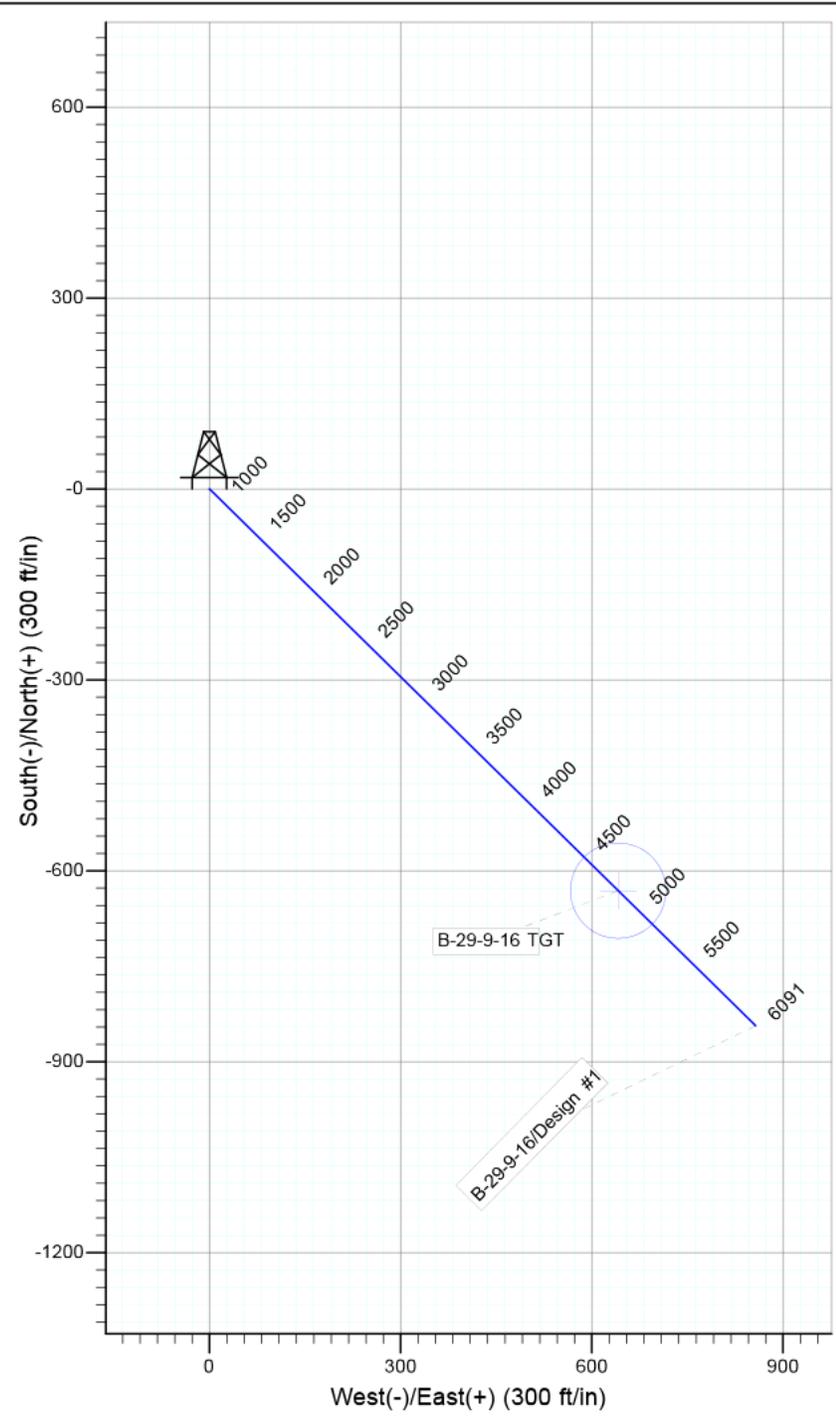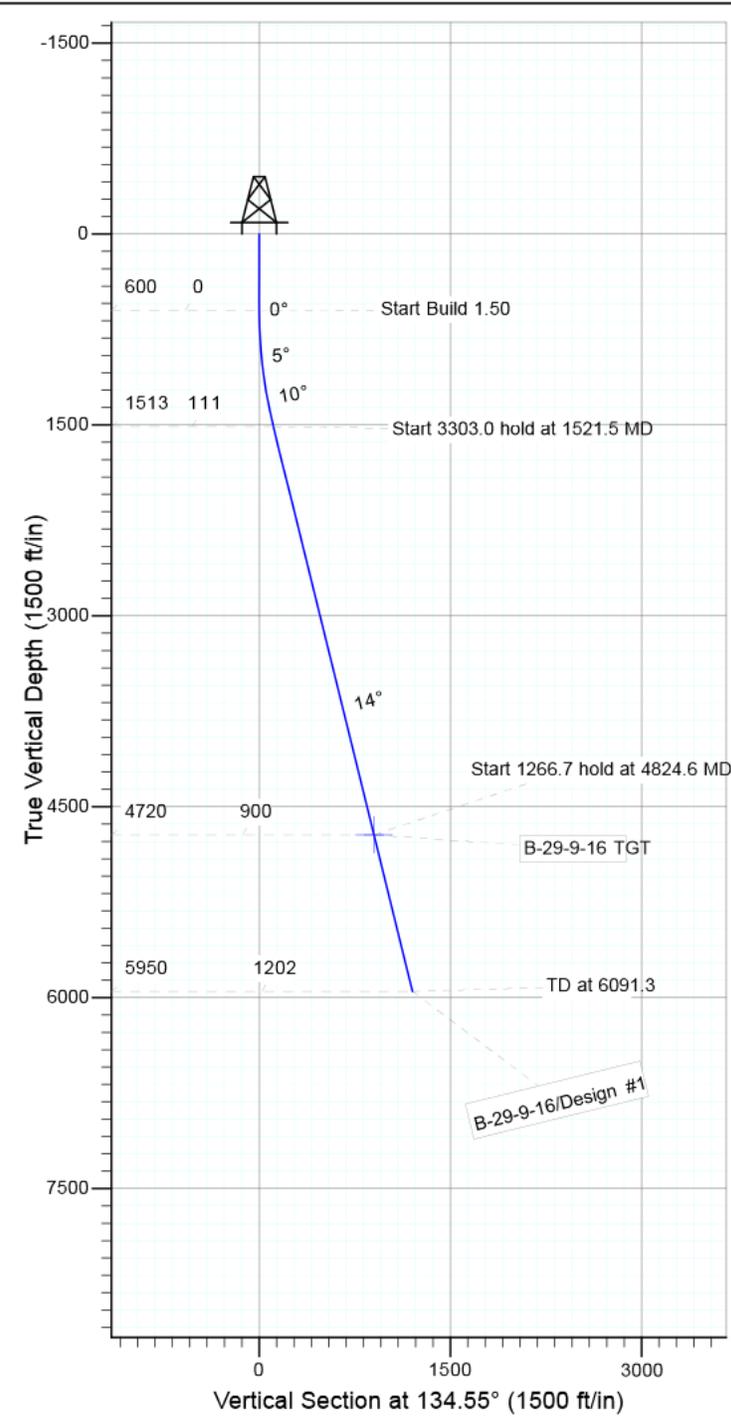

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
B-29-9-16 TGT	4720.0	-631.2	641.2	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1521.5	13.82	134.55	1512.6	-77.6	78.8	1.50	134.55	110.6	
4	4824.6	13.82	134.55	4720.0	-631.2	641.2	0.00	0.00	899.8	B-29-9-16 TGT
5	6091.3	13.82	134.55	5950.0	-843.6	856.9	0.00	0.00	1202.5	







Project: USGS Myton SW (UT)
 Site: SECTION 20 T9, R16
 Well: P-21-9-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.04°

Magnetic Field
 Strength: 52008.1snT
 Dip Angle: 65.70°
 Date: 10/8/2013
 Model: IGRF2010

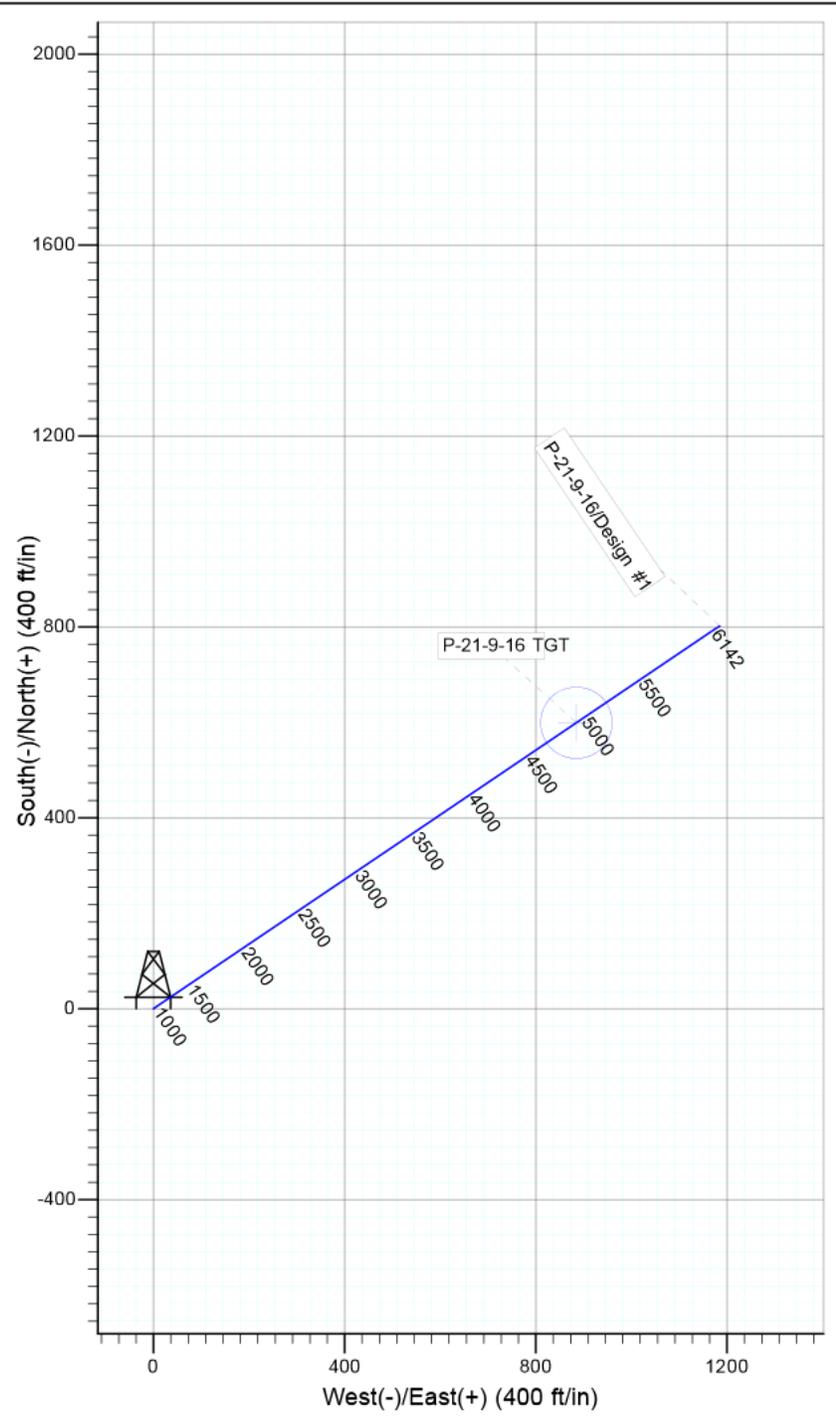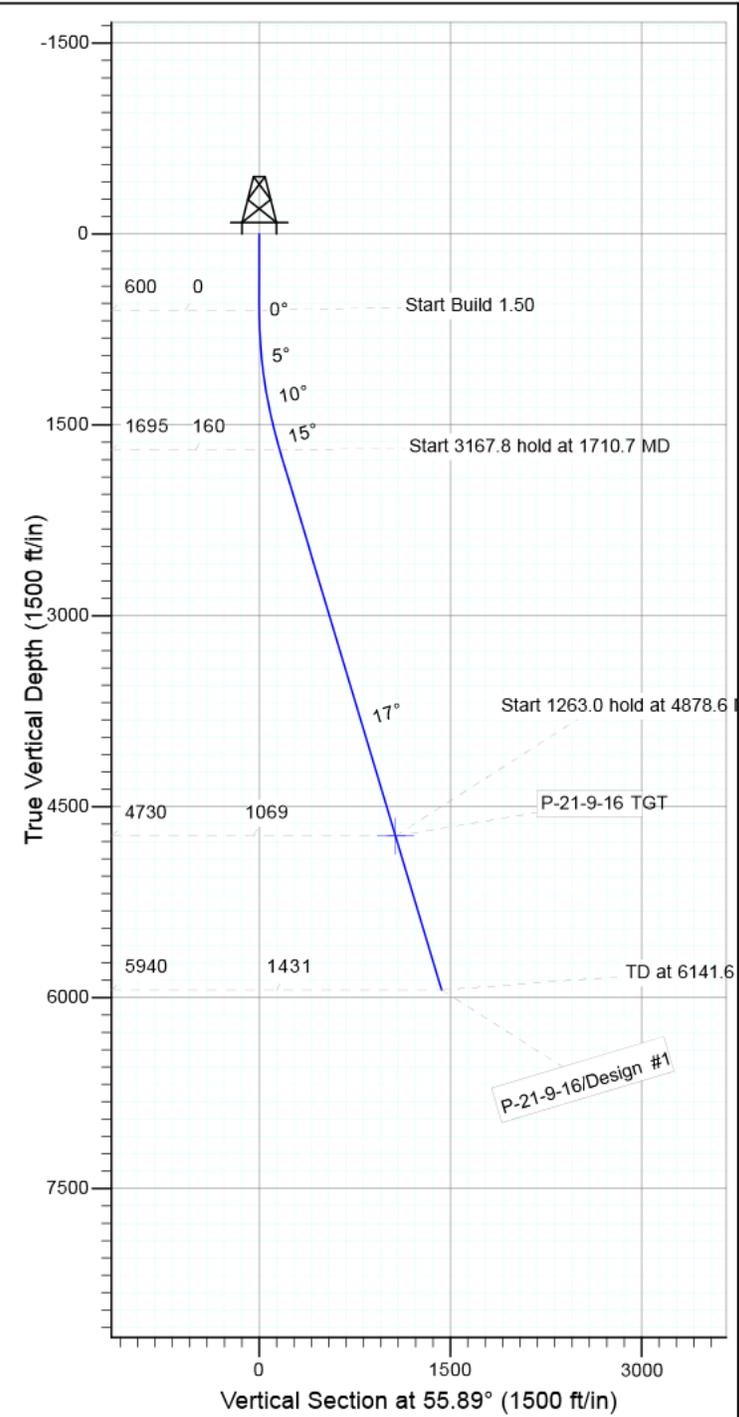

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
P-21-9-16 TGT	4730.0	599.2	884.8	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1710.7	16.66	55.89	1695.1	89.9	132.8	1.50	55.89	160.4	
4	4878.6	16.66	55.89	4730.0	599.2	884.8	0.00	0.00	1068.6	P-21-9-16 TGT
5	6141.6	16.66	55.89	5940.0	802.3	1184.6	0.00	0.00	1430.7	







Project: USGS Myton SW (UT)
 Site: SECTION 20 T9, R16
 Well: C-29-9-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.04°

Magnetic Field
 Strength: 52007.0snT
 Dip Angle: 65.69°
 Date: 10/9/2013
 Model: IGRF2010

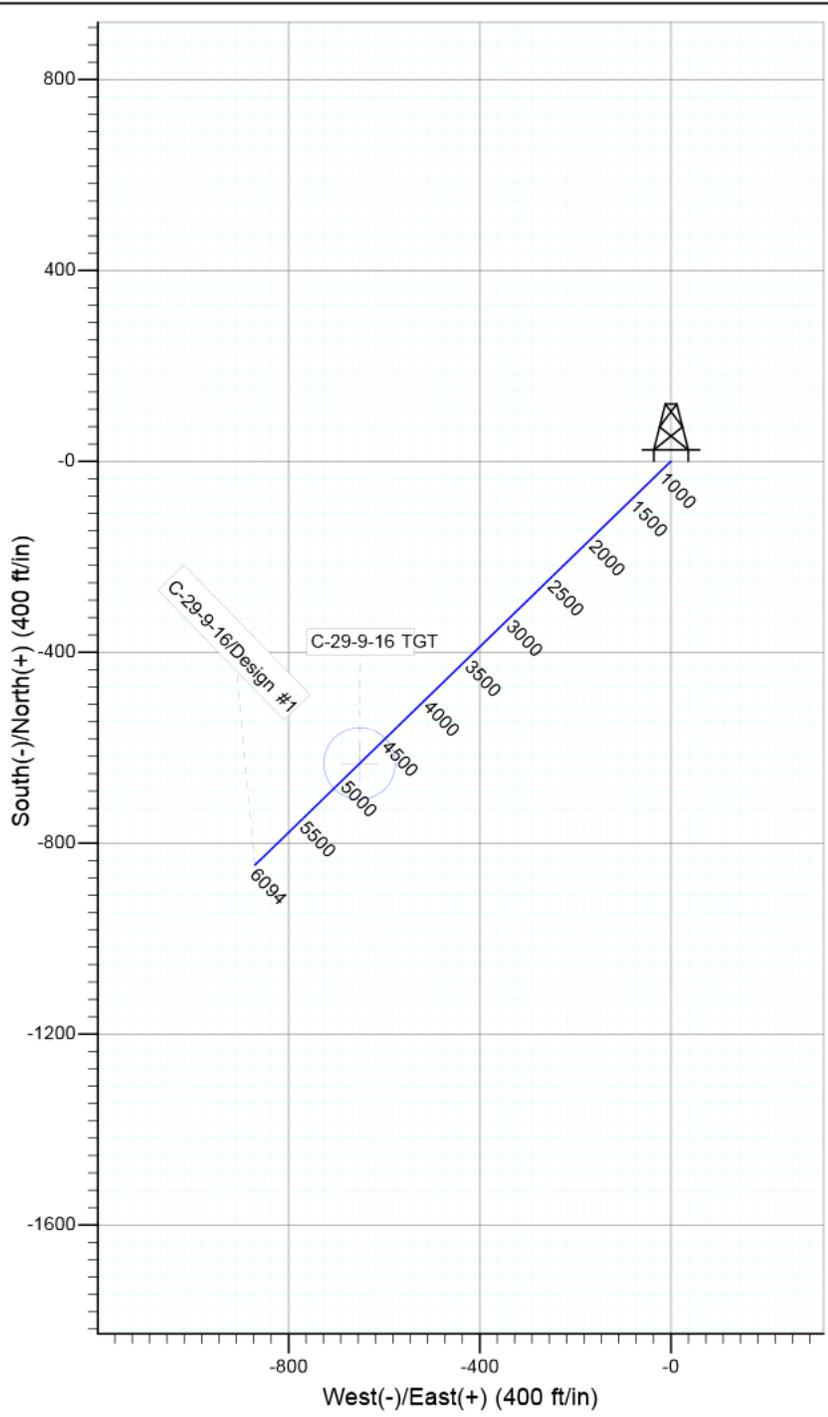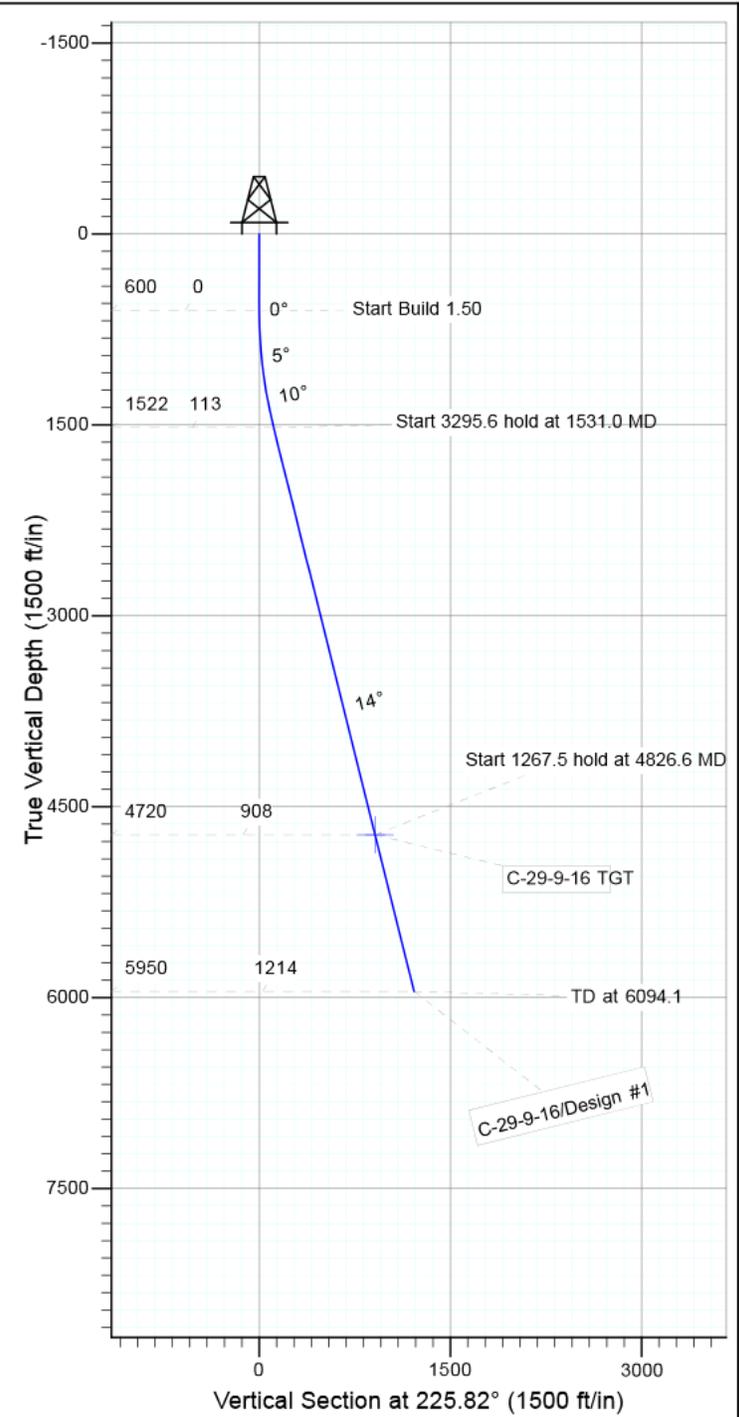

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
C-29-9-16 TGT	4720.0	-633.0	-651.4	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1531.0	13.97	225.82	1521.8	-78.7	-81.0	1.50	225.82	112.9	
4	4826.6	13.97	225.82	4720.0	-633.0	-651.4	0.00	0.00	908.3	C-29-9-16 TGT
5	6094.1	13.97	225.82	5950.0	-846.2	-870.7	0.00	0.00	1214.1	







Project: USGS Myton SW (UT)
 Site: SECTION 20 T9, R16
 Well: E-28-9-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.04°

Magnetic Field
 Strength: 52008.0snT
 Dip Angle: 65.69°
 Date: 10/8/2013
 Model: IGRF2010

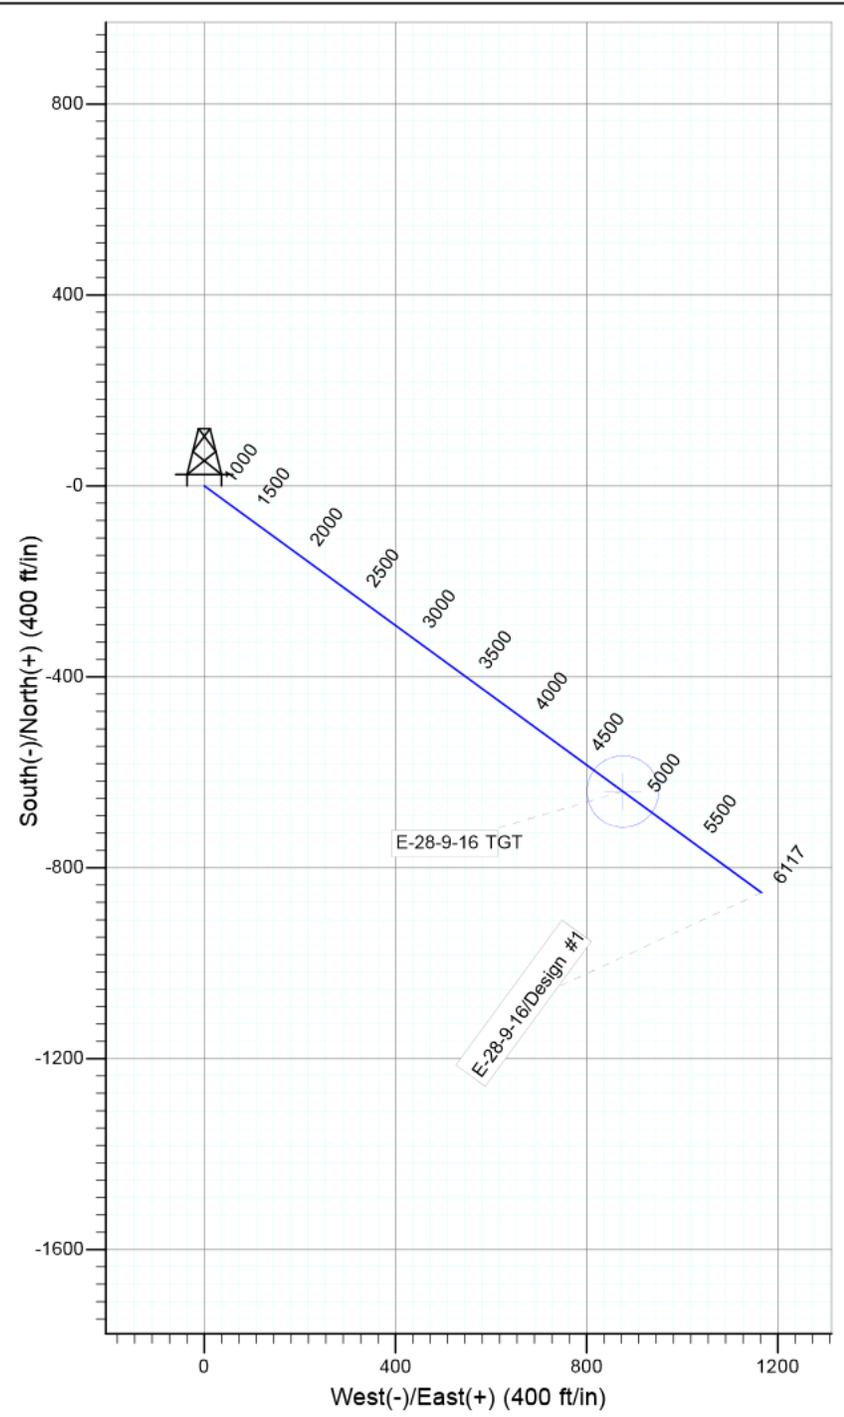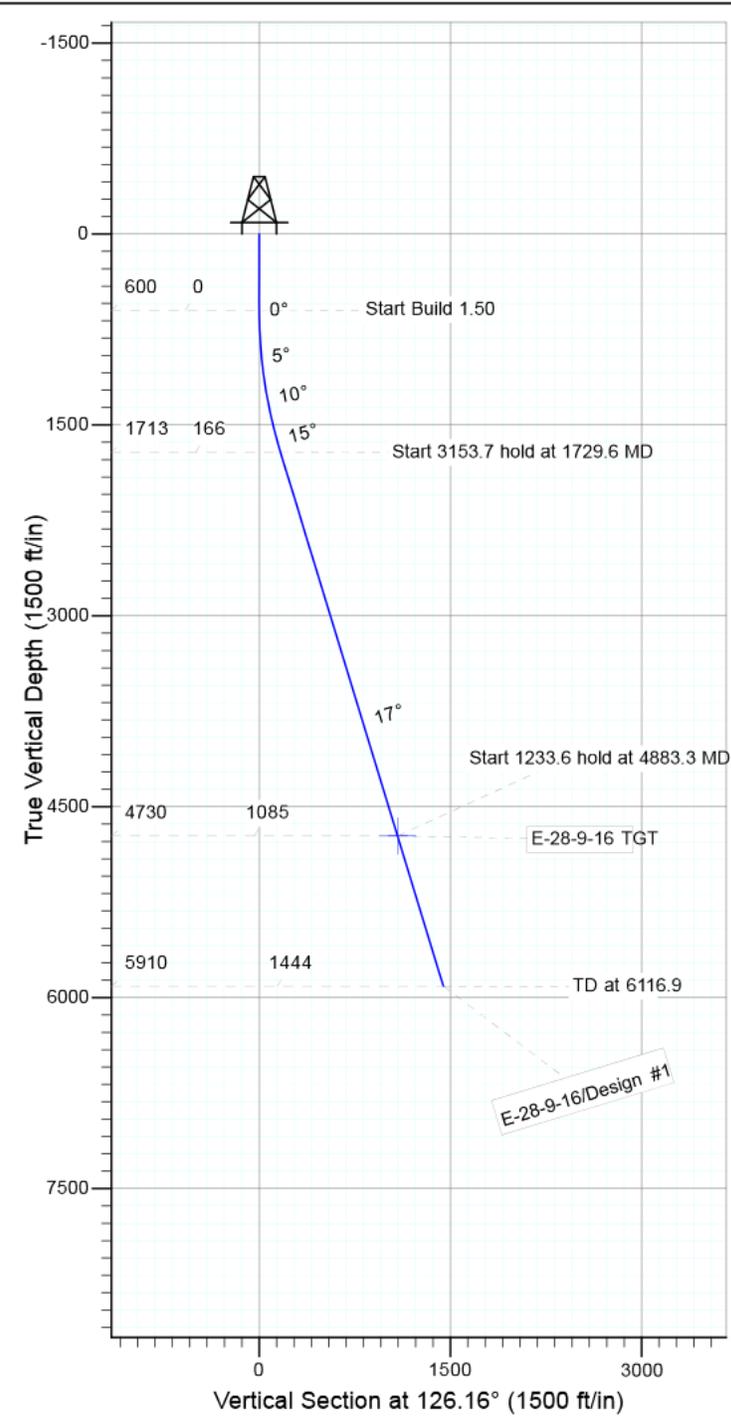

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
E-28-9-16 TGT	4730.0	-640.2	876.0	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1729.6	16.94	126.16	1713.2	-97.8	133.9	1.50	126.16	165.8	
4	4883.3	16.94	126.16	4730.0	-640.2	876.0	0.00	0.00	1084.9	E-28-9-16 TGT
5	6116.9	16.94	126.16	5910.0	-852.3	1166.2	0.00	0.00	1444.5	







Project: USGS Myton SW (UT)
 Site: SECTION 22 T9, R16
 Well: C-27-9-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.03°

Magnetic Field
 Strength: 52013.4snT
 Dip Angle: 65.70°
 Date: 10/9/2013
 Model: IGRF2010

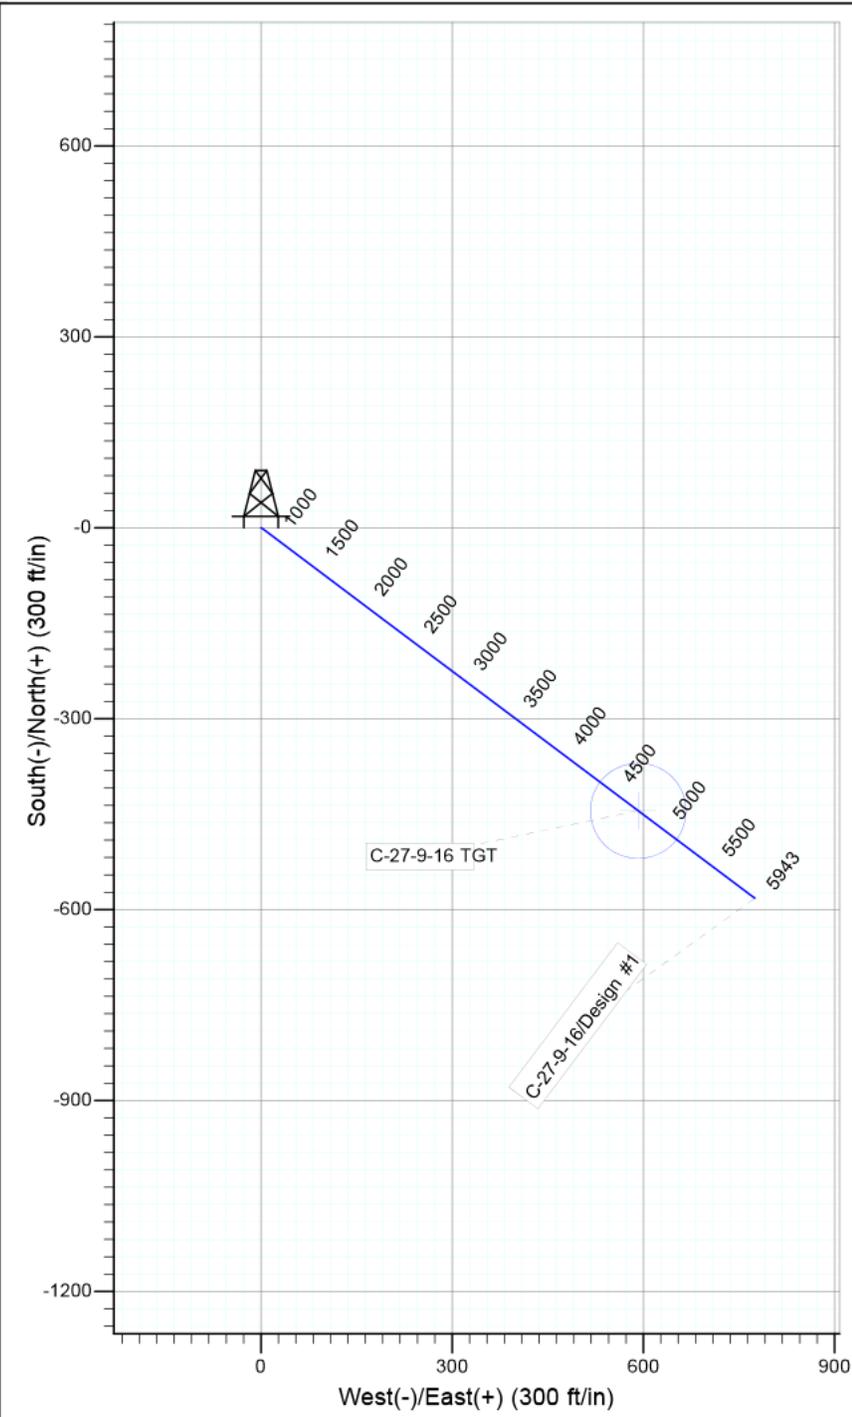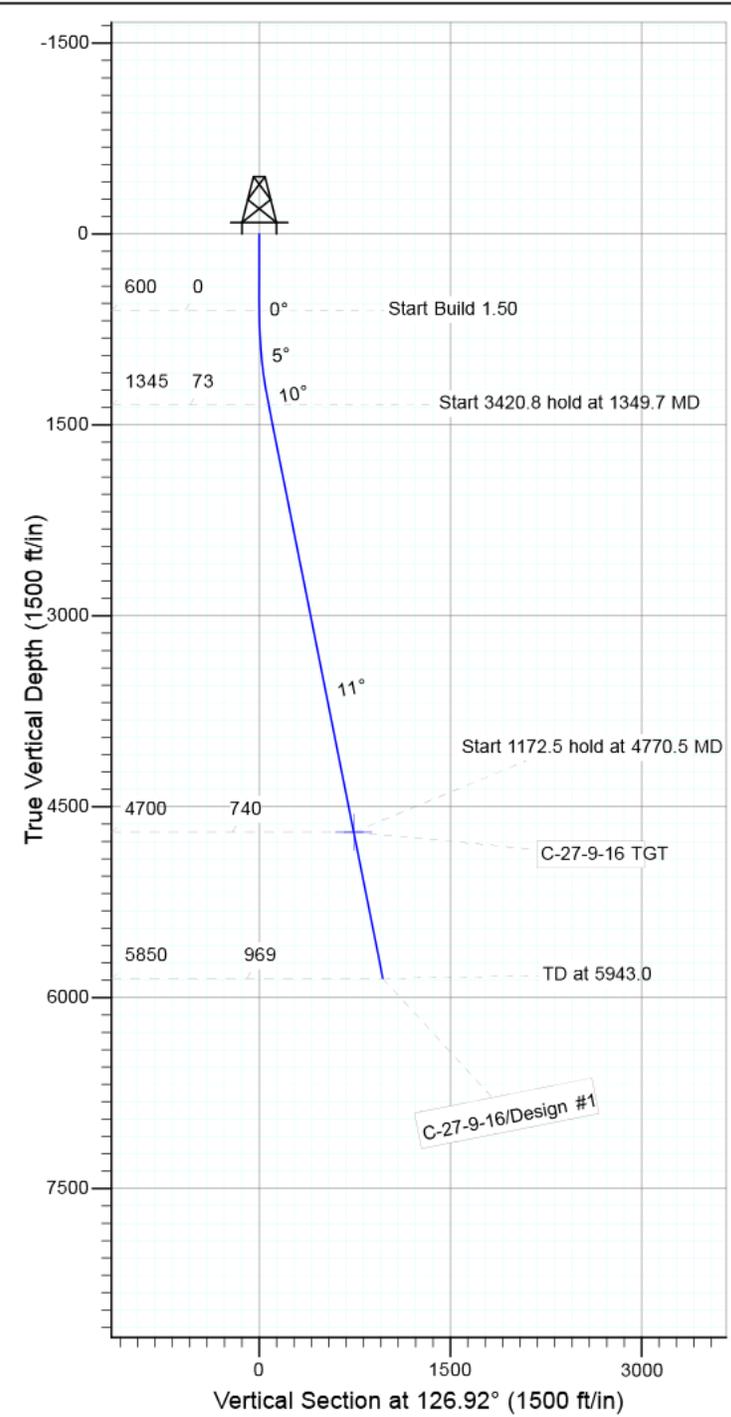

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
C-27-9-16 TGT	4700.0	-444.8	591.9	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1349.7	11.24	126.92	1344.9	-44.0	58.6	1.50	126.92	73.3	
4	4770.5	11.24	126.92	4700.0	-444.8	591.9	0.00	0.00	740.4	C-27-9-16 TGT
5	5943.0	11.24	126.92	5850.0	-582.1	774.7	0.00	0.00	969.0	







Project: USGS Myton SW (UT)
 Site: SECTION 22 T9, R16
 Well: D-27-9-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.03°

Magnetic Field
 Strength: 52013.4snT
 Dip Angle: 65.70°
 Date: 10/9/2013
 Model: IGRF2010

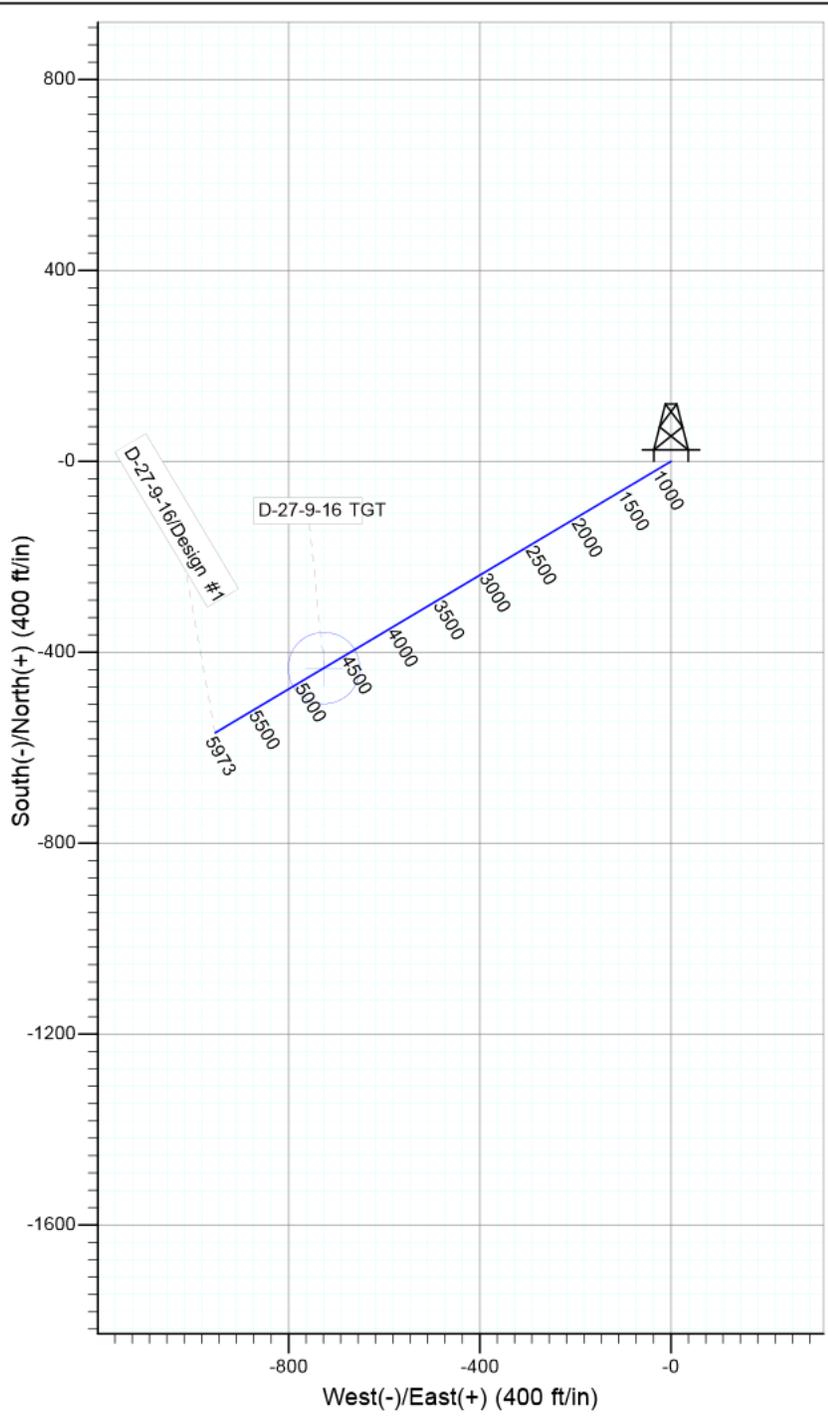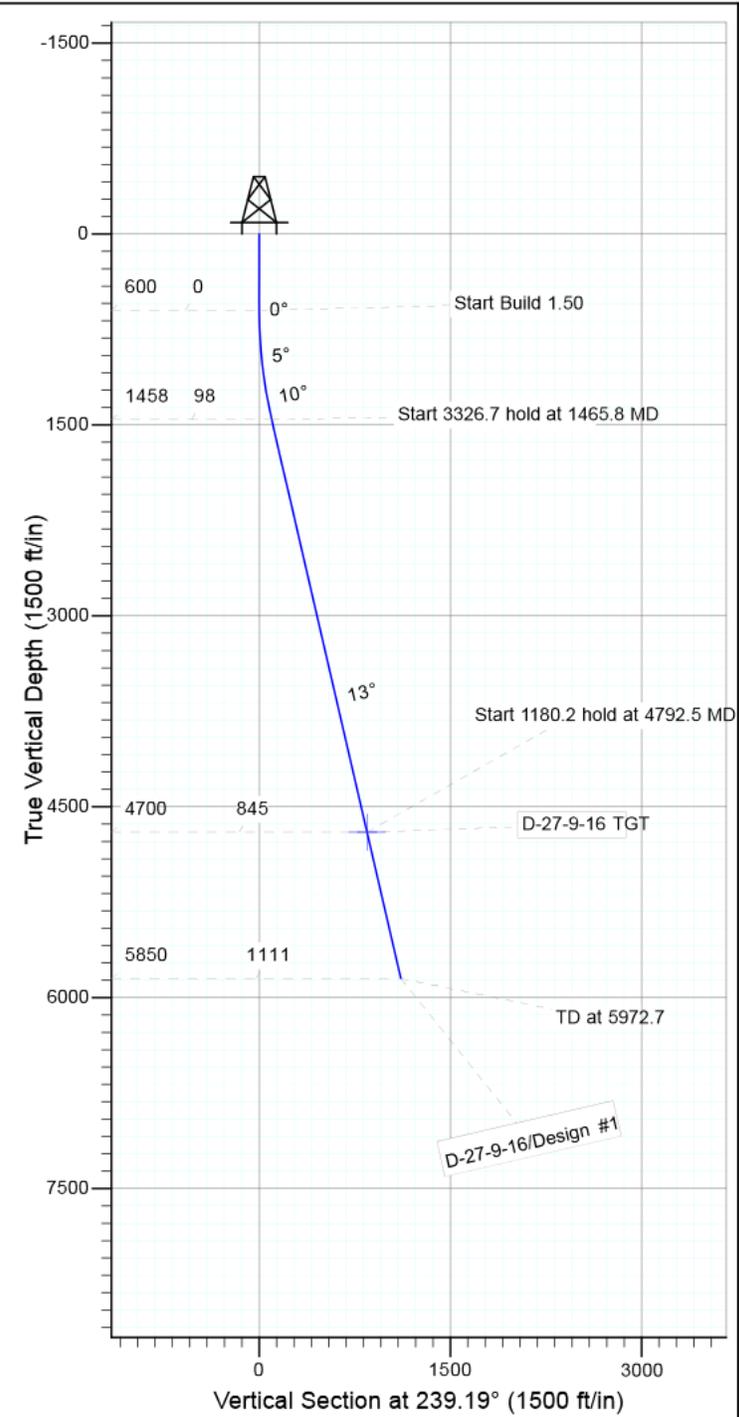

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
D-27-9-16 TGT	4700.0	-433.0	-726.0	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1465.8	12.99	239.19	1458.4	-50.0	-83.9	1.50	239.19	97.7	
4	4792.5	12.99	239.19	4700.0	-433.0	-726.0	0.00	0.00	845.3	D-27-9-16 TGT
5	5972.7	12.99	239.19	5850.0	-568.8	-953.8	0.00	0.00	1110.5	







Project: USGS Myton SW (UT)
 Site: SECTION 23 T9, R16
 Well: K-22-9-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.02°

Magnetic Field
 Strength: 52018.9snT
 Dip Angle: 65.71°
 Date: 10/9/2013
 Model: IGRF2010

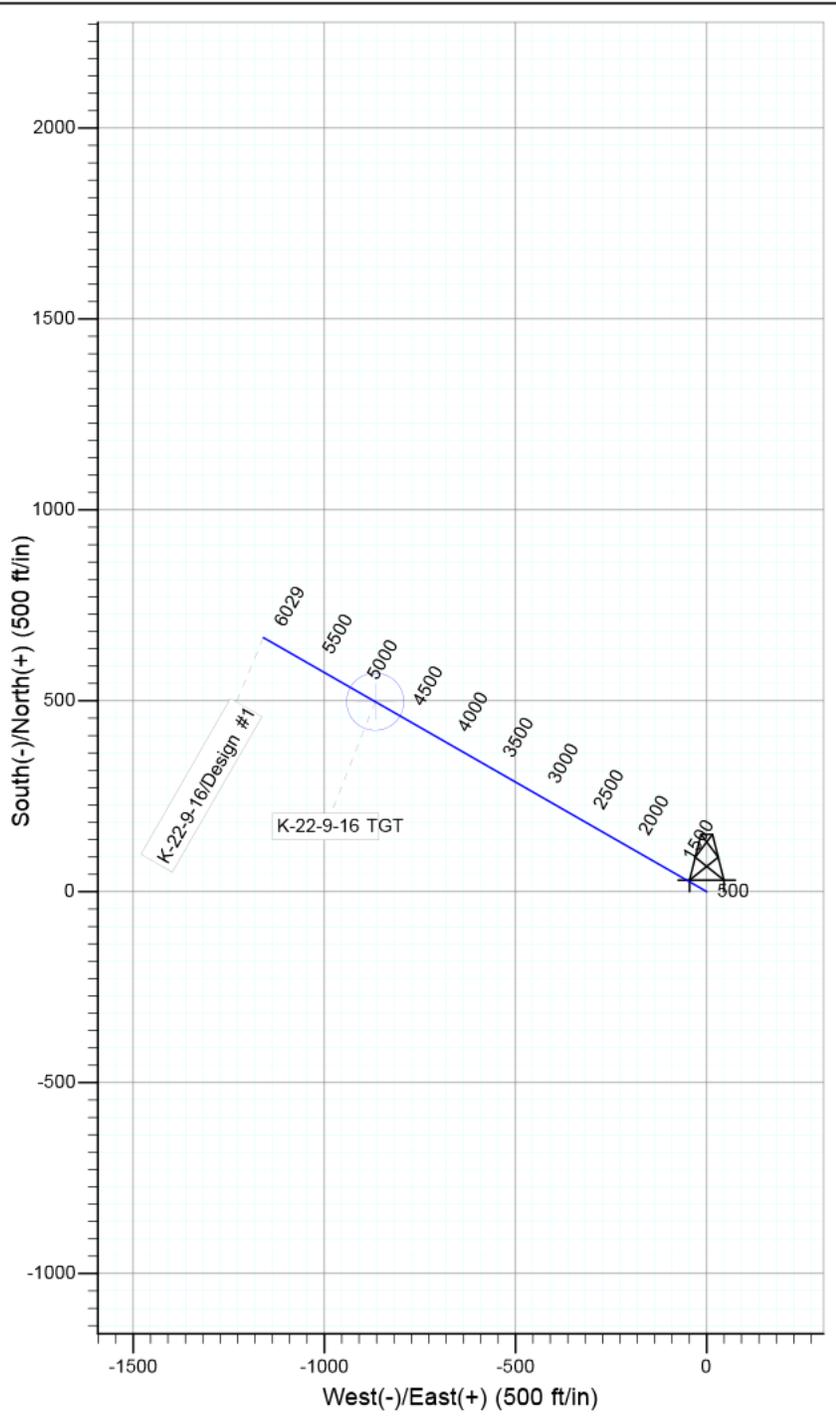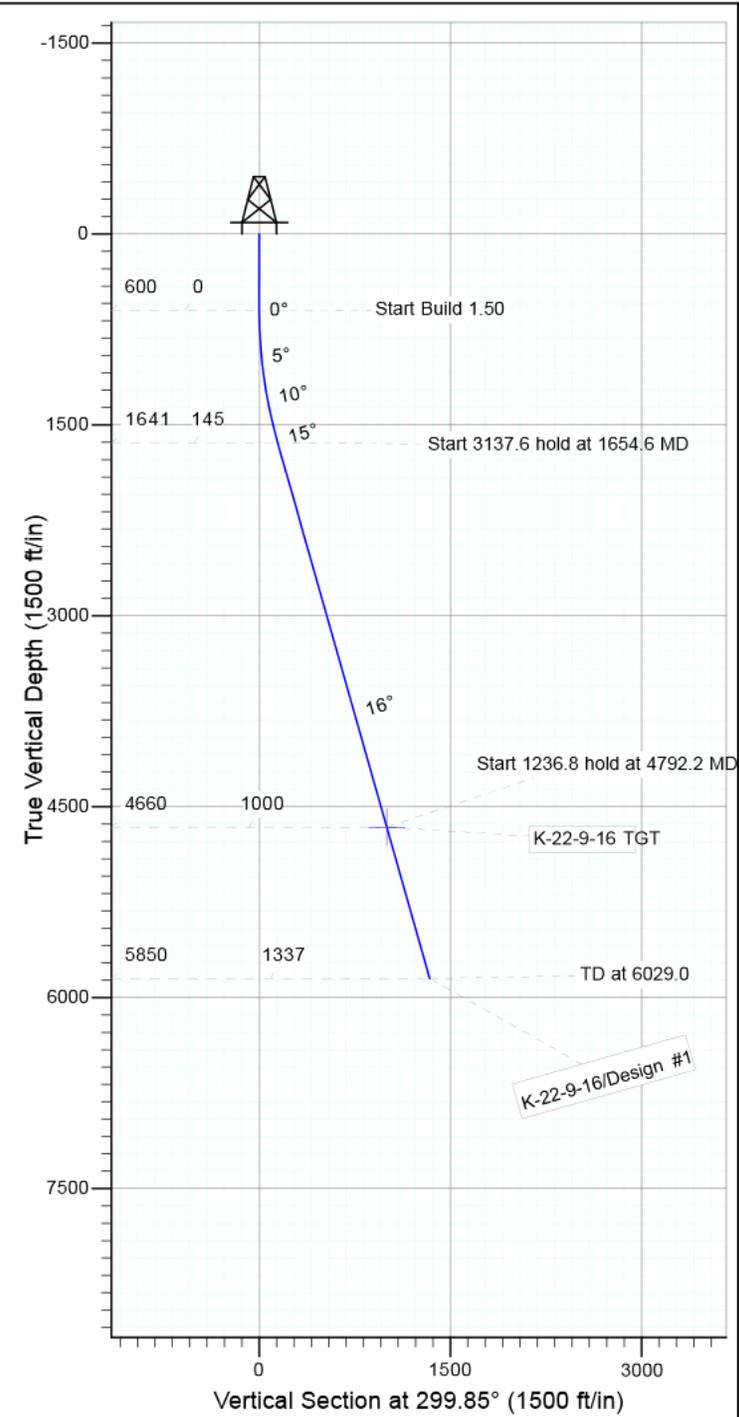

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
K-22-9-16 TGT	4660.0	497.7	-867.3	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1654.6	15.82	299.85	1641.2	72.0	-125.5	1.50	299.85	144.6	
4	4792.2	15.82	299.85	4660.0	497.7	-867.3	0.00	0.00	999.9	K-22-9-16 TGT
5	6029.0	15.82	299.85	5850.0	665.5	-1159.7	0.00	0.00	1337.1	







Project: USGS Myton SW (UT)
 Site: SECTION 23 T9, R16
 Well: N-23-9-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.02°

Magnetic Field
 Strength: 52018.9snT
 Dip Angle: 65.71°
 Date: 10/9/2013
 Model: IGRF2010

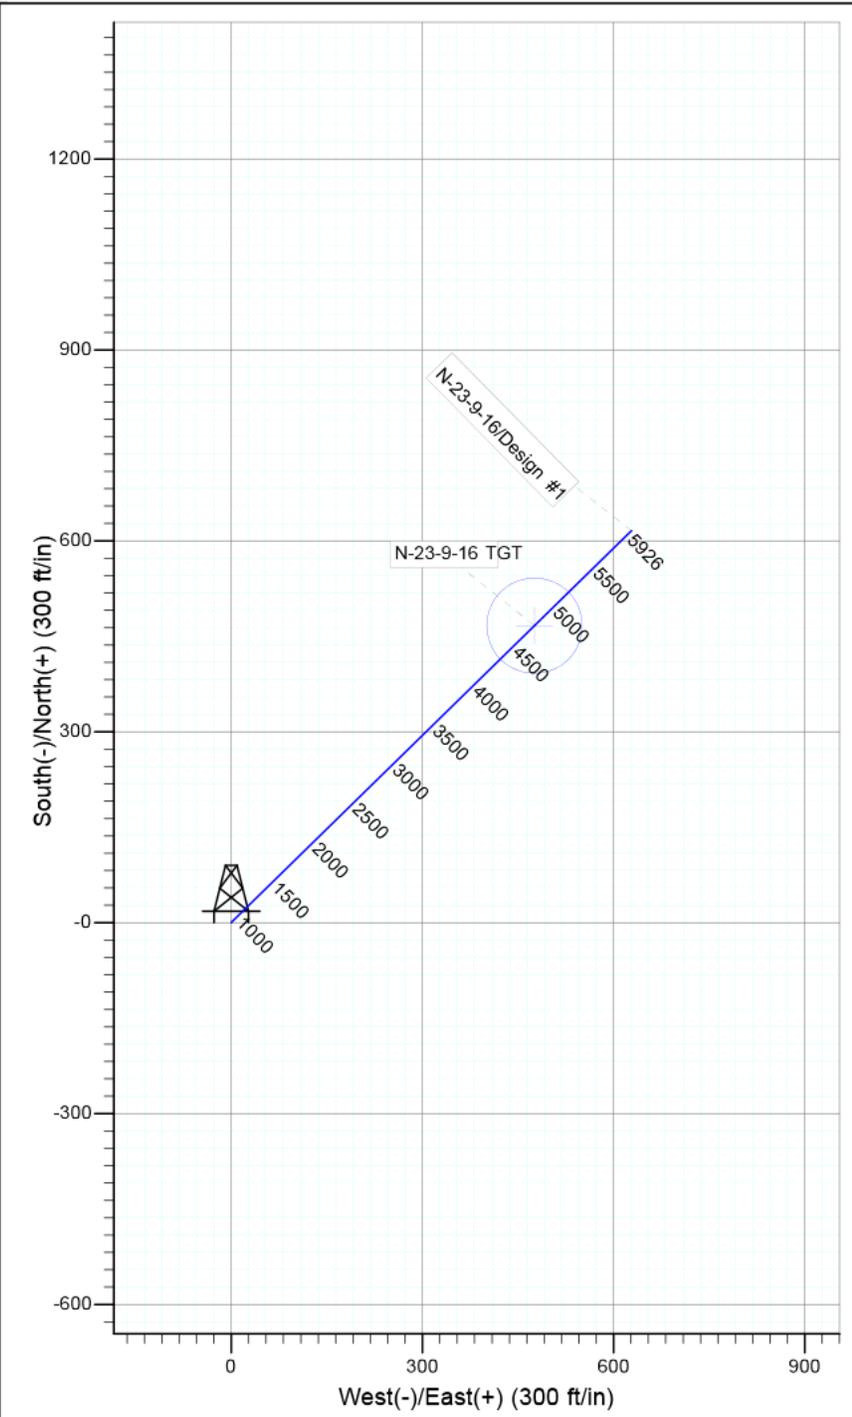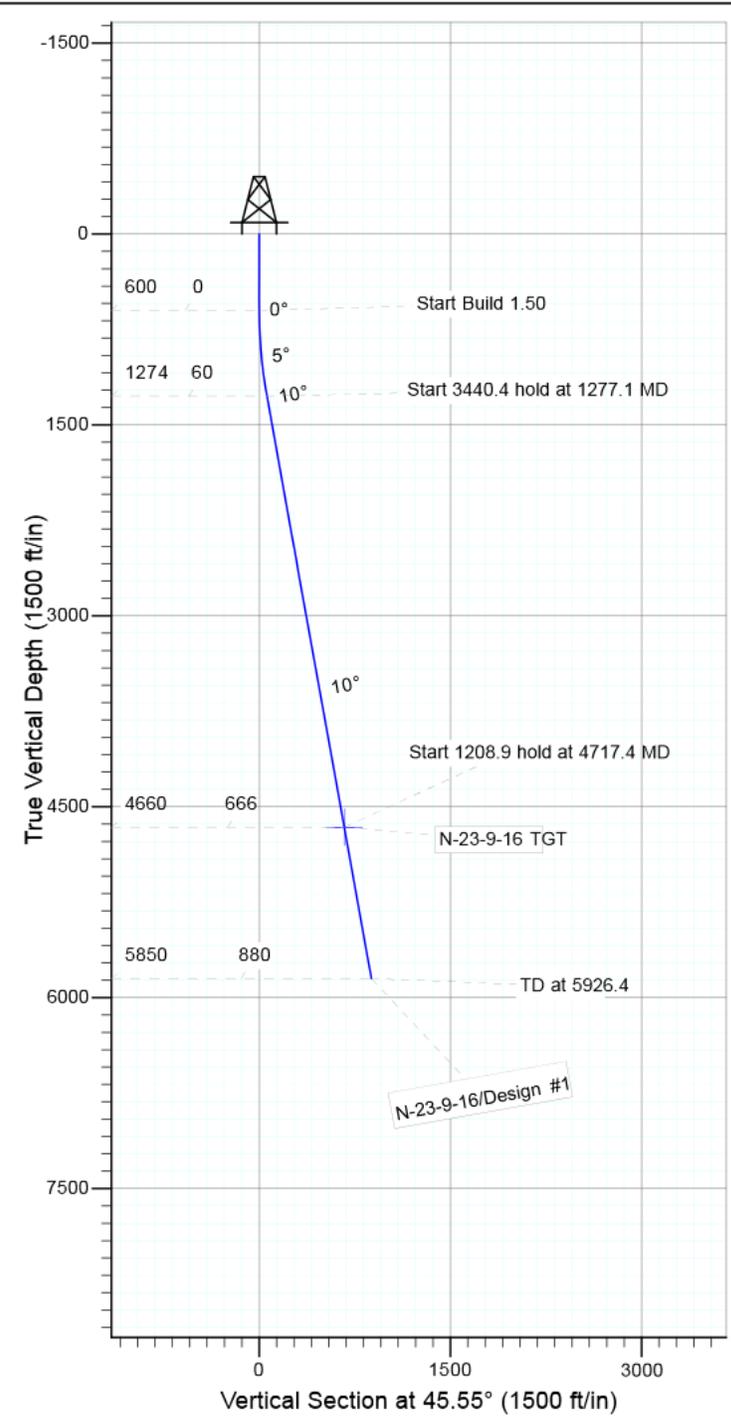

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
N-23-9-16 TGT	4660.0	466.7	475.8	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1277.1	10.16	45.55	1273.5	41.9	42.7	1.50	45.55	59.9	
4	4717.4	10.16	45.55	4660.0	466.7	475.8	0.00	0.00	666.5	N-23-9-16 TGT
5	5926.4	10.16	45.55	5850.0	616.0	628.0	0.00	0.00	879.7	







Azimuths to True North
 Magnetic North: 10.98°

Magnetic Field
 Strength: 52052.6snT
 Dip Angle: 65.75°
 Date: 10/31/2013
 Model: IGRF2010

KOP @ 600'
 DOGLEG RATE 1.5 DEG/100'
 TARGET RADIUS IS 75'

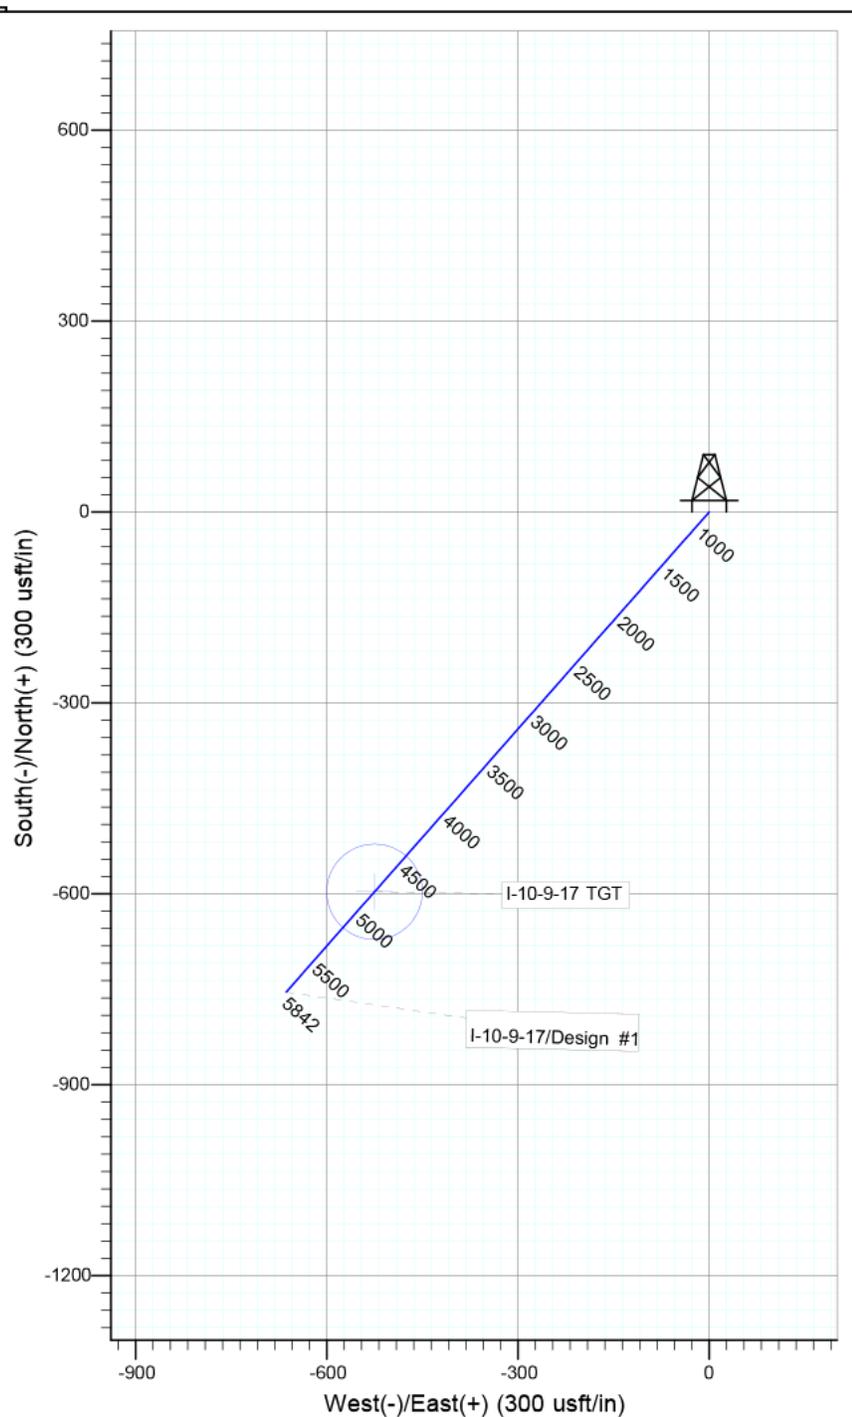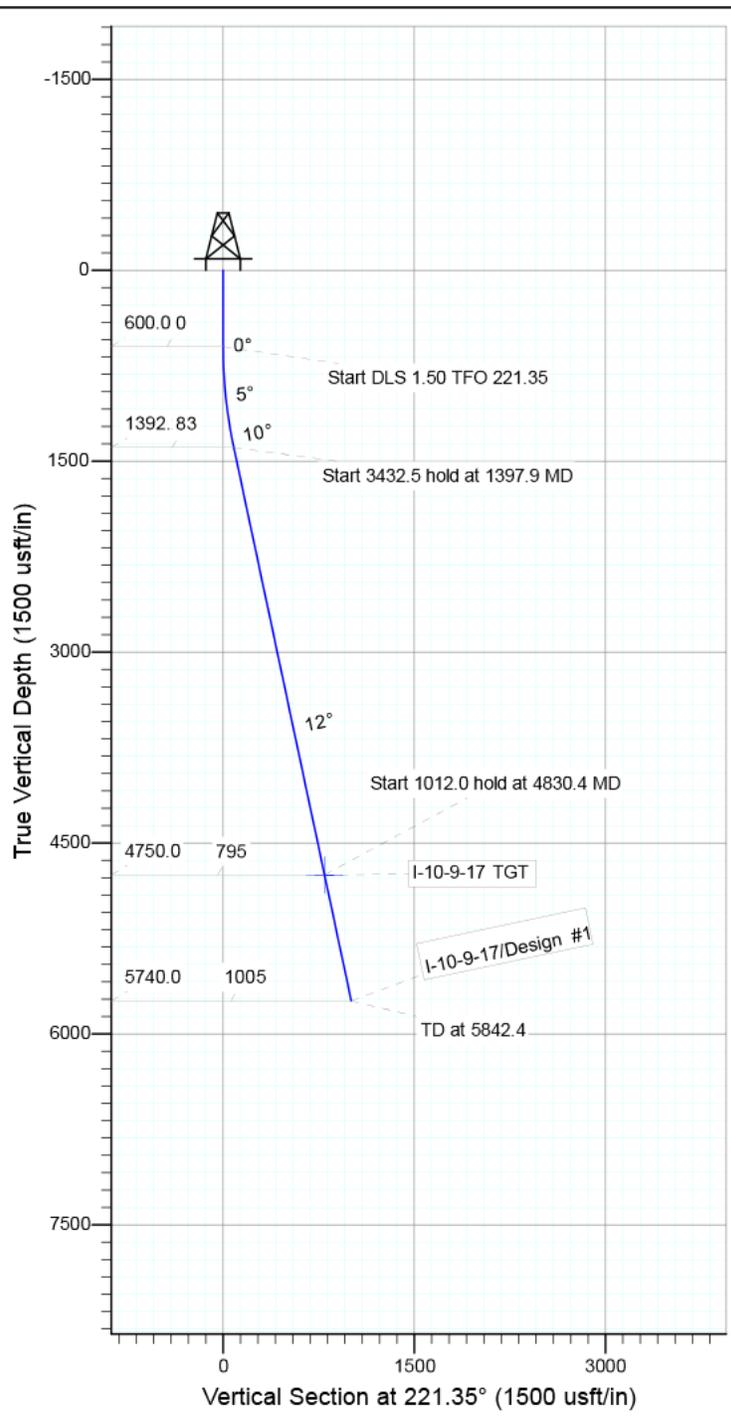

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
I-10-9-17 TGT	4750.0	-596.7	-525.1	Circle (Radius: 75.0)


SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1397.9	11.97	221.35	1392.2	-62.3	-54.9	1.50	221.35	83.0	
4	4830.4	11.97	221.35	4750.0	-596.7	-525.1	0.00	0.00	794.9	I-10-9-17 TGT
5	5842.4	11.97	221.35	5740.0	-754.3	-663.8	0.00	0.00	1004.8	







Project: USGS Myton SW (UT)
 Site: SECTION 10 T9S, R17E
 Well: F-11-9-17
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 10.98°

Magnetic Field
 Strength: 52054.4snT
 Dip Angle: 65.76°
 Date: 10/24/2013
 Model: IGRF2010

KOP @ 600'
DOGLEG RATE 1.5 DEG/100'
TARGET RADIUS IS 75'

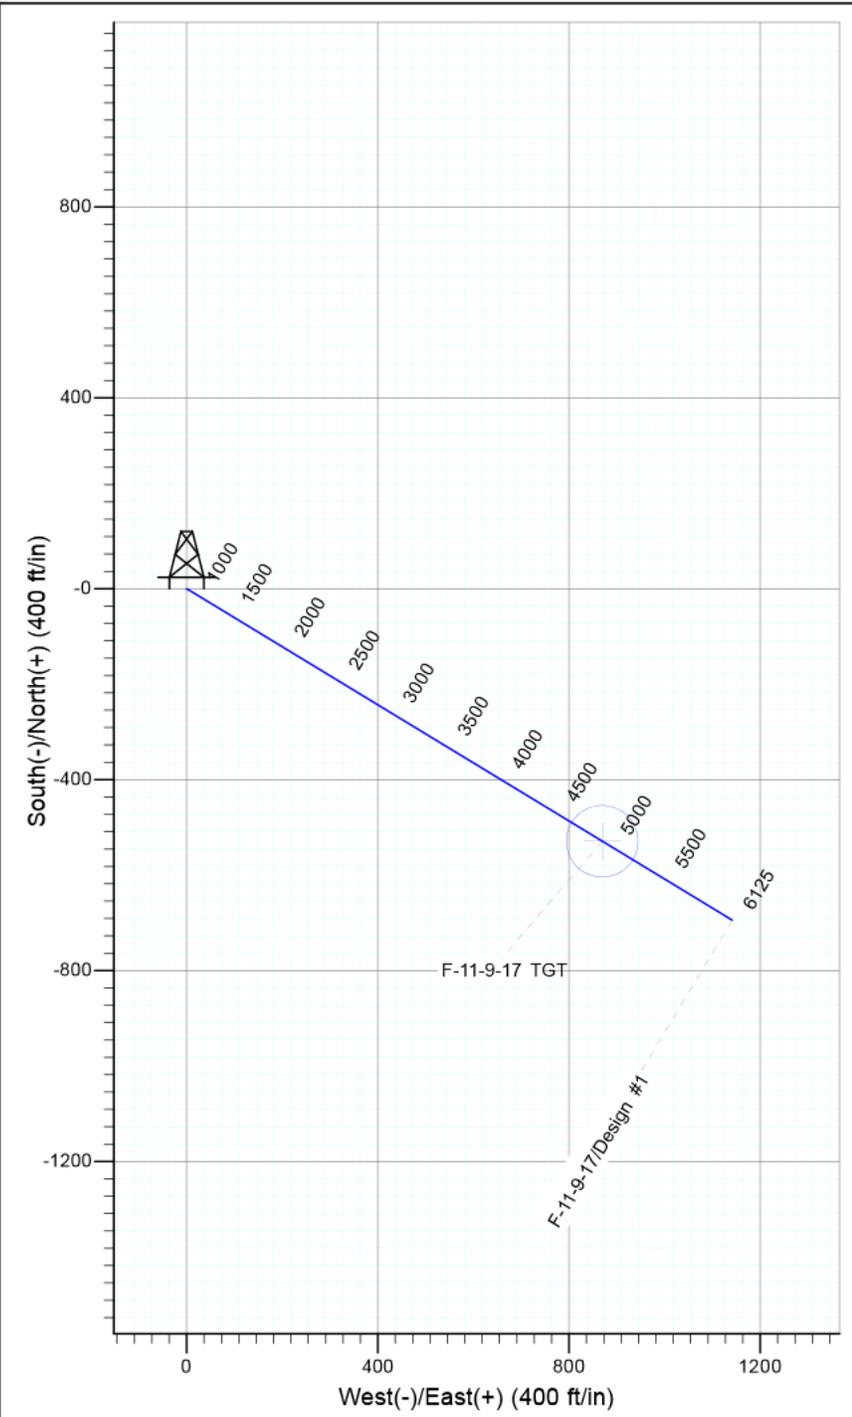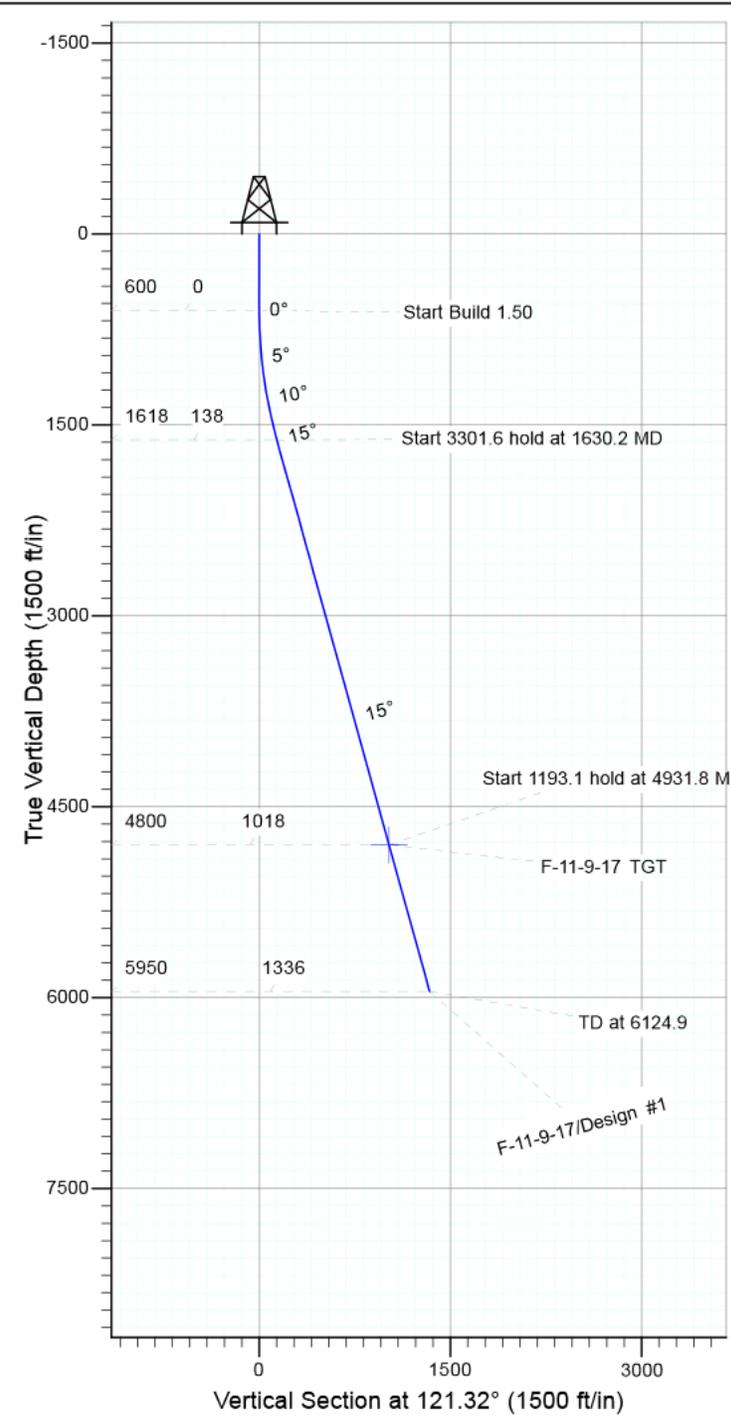

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
F-11-9-17 TGT	4800.0	-529.1	869.5	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1630.2	15.45	121.32	1617.8	-71.8	118.0	1.50	121.32	138.1	
4	4931.8	15.45	121.32	4800.0	-529.1	869.5	0.00	0.00	1017.8	F-11-9-17 TGT
5	6124.9	15.45	121.32	5950.0	-694.3	1141.1	0.00	0.00	1335.8	







Project: USGS Myton SW (UT)
 Site: SECTION 11 T9S, R17E
 Well: R-11-9-17
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 10.98°

Magnetic Field
 Strength: 52058.4snT
 Dip Angle: 65.75°
 Date: 9/30/2013
 Model: IGRF2010

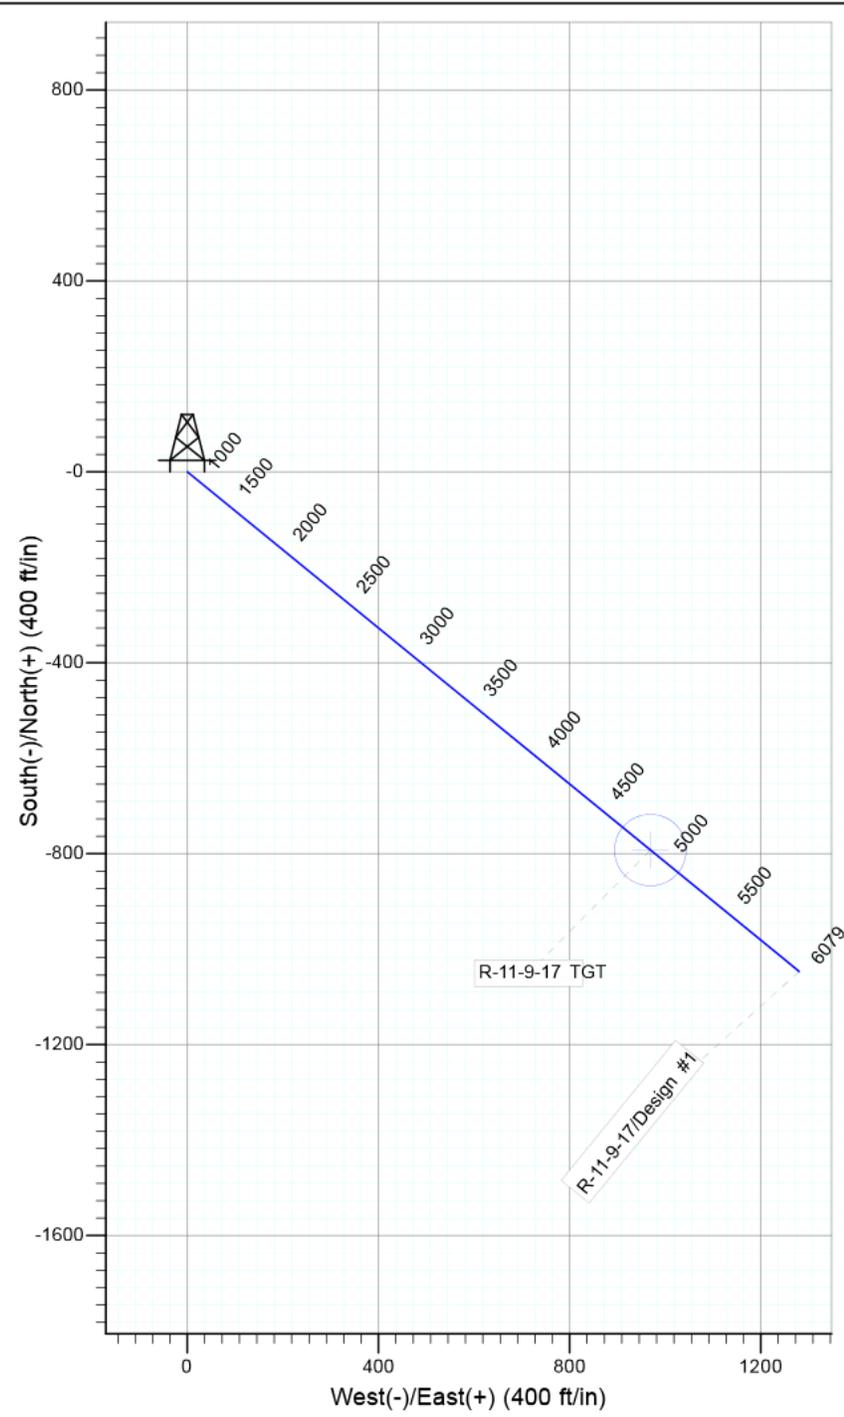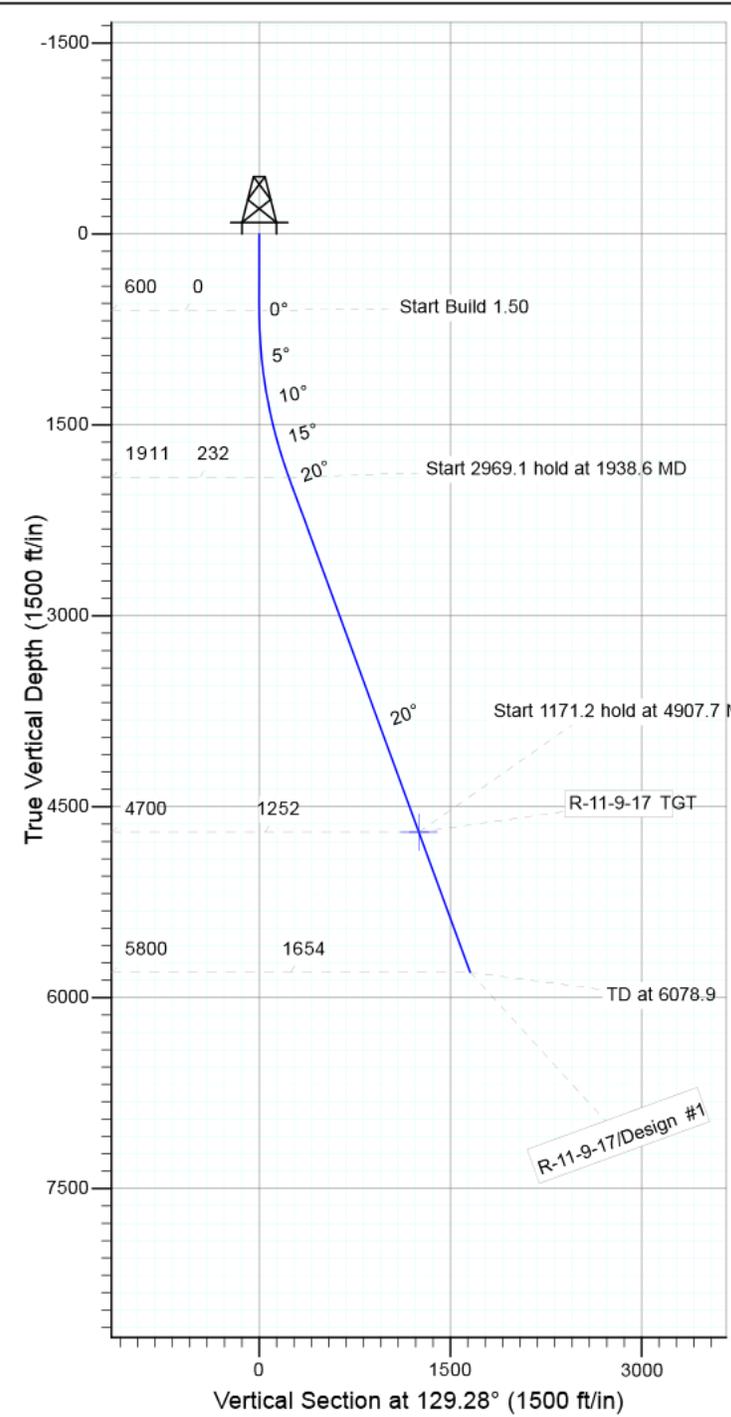

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
R-11-9-17 TGT	4700.0	-792.4	968.8	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1938.6	20.08	129.28	1911.4	-147.0	179.7	1.50	129.28	232.2	
4	4907.7	20.08	129.28	4700.0	-792.4	968.8	0.00	0.00	1251.5	R-11-9-17 TGT
5	6078.9	20.08	129.28	5800.0	-1046.9	1280.0	0.00	0.00	1653.6	



Well Name	NEWFIELD PRODUCTION COMPANY GMBU 125-36-8-16 430135278			
String	SURF	PROD		
Casing Size(")	8.625	5.500		
Setting Depth (TVD)	700	6122		
Previous Shoe Setting Depth (TVD)	0	700		
Max Mud Weight (ppg)	8.3	8.3		
BOPE Proposed (psi)	500	2000		
Casing Internal Yield (psi)	2950	4810		
Operators Max Anticipated Pressure (psi)	2656	8.3		

Calculations	SURF String	8.625	"	
Max BHP (psi)	.052*Setting Depth*MW=	302		
			BOPE Adequate For Drilling And Setting Casing at Depth?	
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=	218	YES	air/mist
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=	148	YES	OK
			*Can Full Expected Pressure Be Held At Previous Shoe?	
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=	148	NO	OK
Required Casing/BOPE Test Pressure=		700	psi	
*Max Pressure Allowed @ Previous Casing Shoe=		0	psi *Assumes 1psi/ft frac gradient	


Calculations	PROD String	5.500	"	
Max BHP (psi)	.052*Setting Depth*MW=	2642		
			BOPE Adequate For Drilling And Setting Casing at Depth?	
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=	1907	YES	2M BOP w/dbl rams, low pressure rotating head, closing uni
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=	1295	YES	OK
			*Can Full Expected Pressure Be Held At Previous Shoe?	
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=	1449	NO	OK
Required Casing/BOPE Test Pressure=		2000	psi	
*Max Pressure Allowed @ Previous Casing Shoe=		700	psi *Assumes 1psi/ft frac gradient	

Calculations	String		"	
Max BHP (psi)	.052*Setting Depth*MW=			
			BOPE Adequate For Drilling And Setting Casing at Depth?	
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=		NO	
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=		NO	
			*Can Full Expected Pressure Be Held At Previous Shoe?	
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=		NO	
Required Casing/BOPE Test Pressure=			psi	
*Max Pressure Allowed @ Previous Casing Shoe=			psi *Assumes 1psi/ft frac gradient	

Calculations	String		"	
Max BHP (psi)	.052*Setting Depth*MW=			
			BOPE Adequate For Drilling And Setting Casing at Depth?	
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=		NO	
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=		NO	
			*Can Full Expected Pressure Be Held At Previous Shoe?	
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=		NO	
Required Casing/BOPE Test Pressure=			psi	
*Max Pressure Allowed @ Previous Casing Shoe=			psi *Assumes 1psi/ft frac gradient	

43013527800000 GMBJ125-36-8-16

Casing Schematic

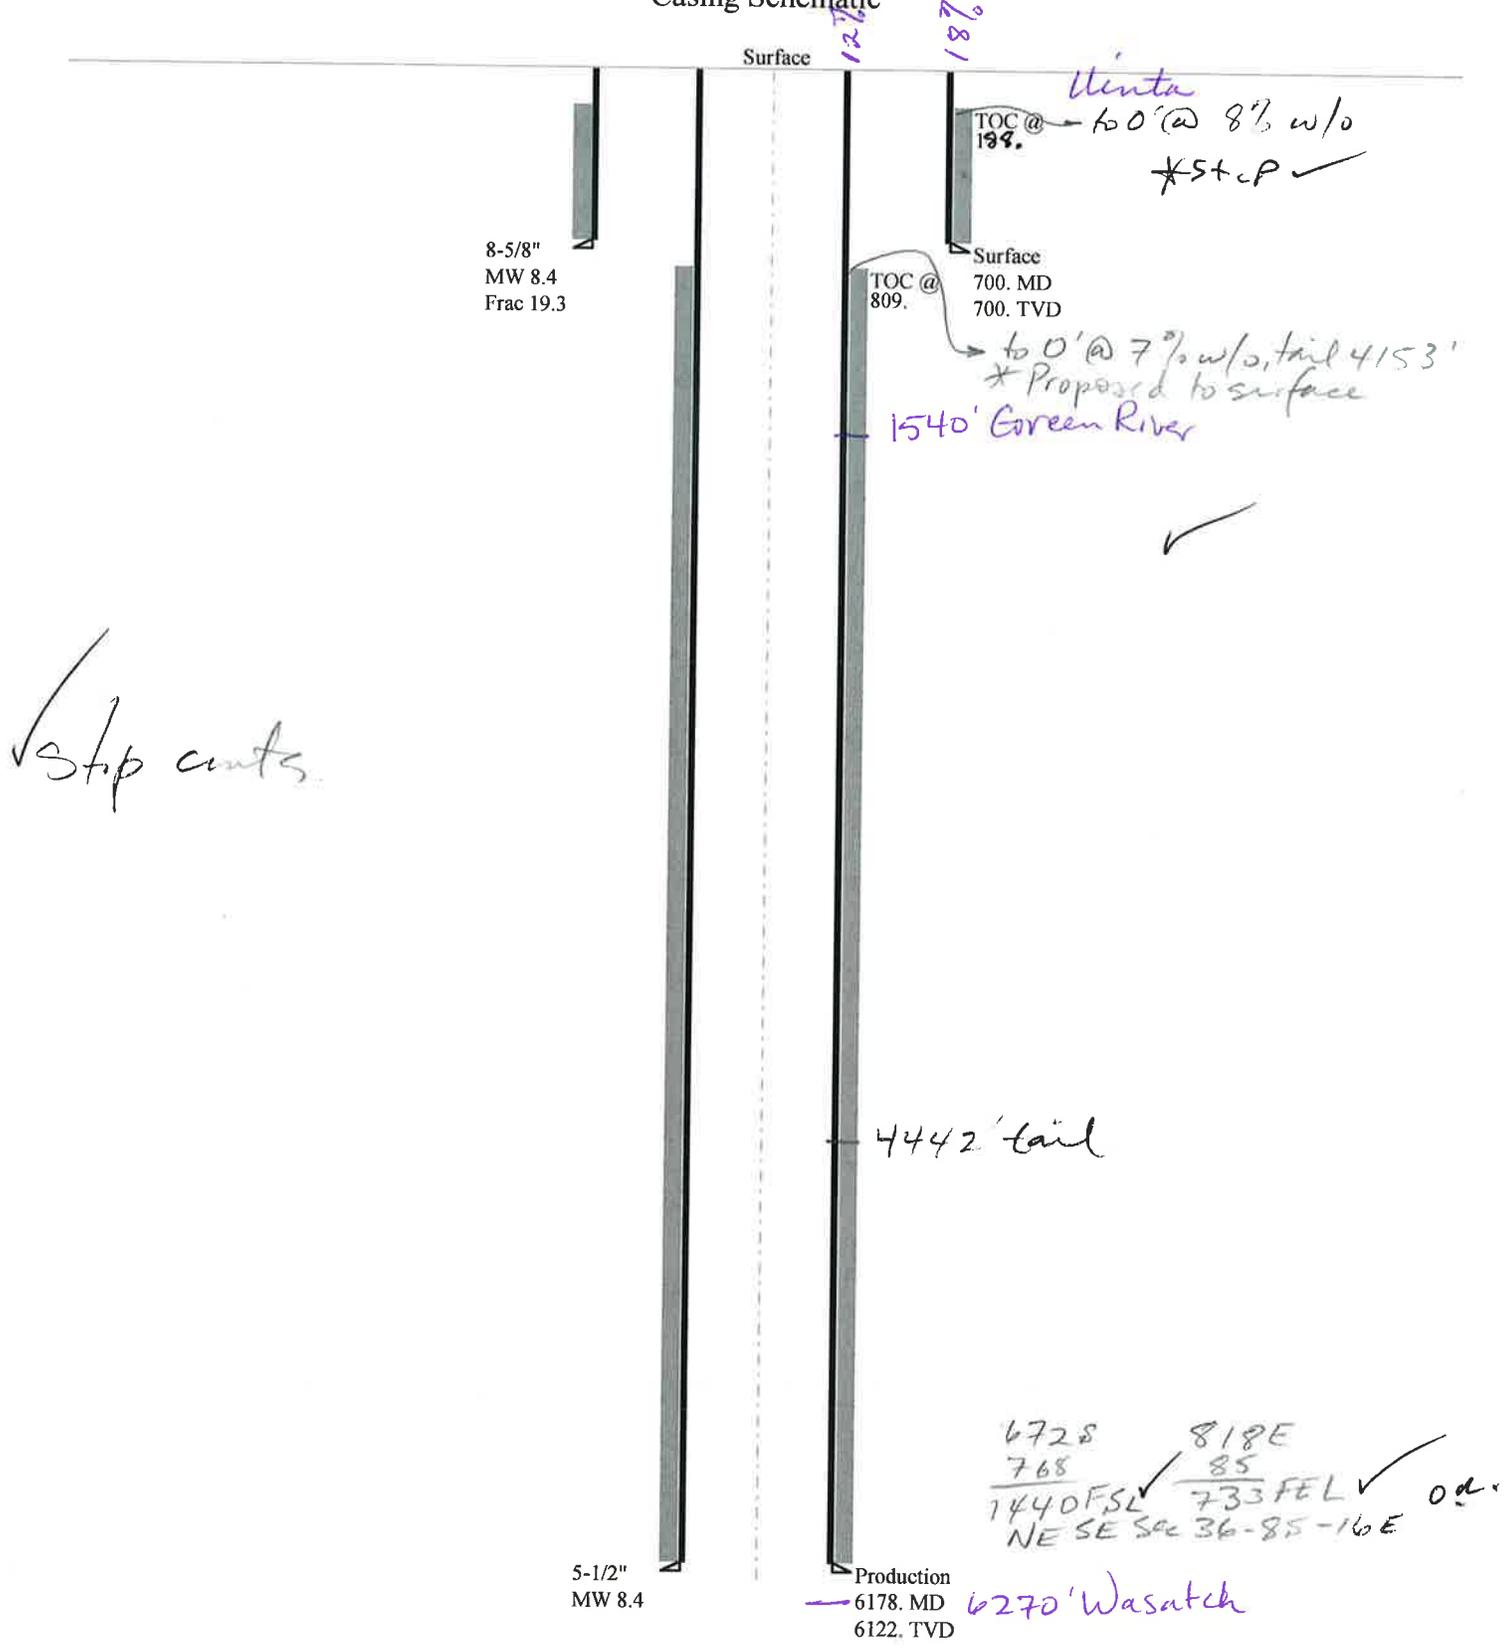

Well name:	43013527800000 GMBV125-36-8-16	
Operator:	NEWFIELD PRODUCTION COMPANY	
String type:	Surface	Project ID: 43-013-52780
Location:	DUCHESNE COUNTY	

Design parameters:

Collapse

Mud weight: 8.400 ppg
Design is based on evacuated pipe.

Minimum design factors:

Collapse:

Design factor 1.125

Environment:

H2S considered? No
Surface temperature: 74 °F
Bottom hole temperature: 84 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 100 ft

Burst:

Design factor 1.00

Cement top: 188 ft

Burst

Max anticipated surface pressure: 616 psi
Internal gradient: 0.120 psi/ft
Calculated BHP 700 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
8 Round LTC: 1.70 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Tension is based on buoyed weight.
Neutral point: 612 ft

Directional well information:

Kick-off point 600 ft
Departure at shoe: 1 ft
Maximum dogleg: 1.5 °/100ft
Inclination at shoe: 1.5 °

Re subsequent strings:

Next setting depth: 6,122 ft
Next mud weight: 8.400 ppg
Next setting BHP: 2,672 psi
Fracture mud wt: 19.250 ppg
Fracture depth: 700 ft
Injection pressure: 700 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost (\$)
1	700	8.625	24.00	J-55	ST&C	700	700	7.972	3603
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	305	1350	4.421	700	2950	4.21	14.7	244	16.62 J

Prepared by: Helen Sadik-Macdonald
Div of Oil, Gas & Mining

Phone: 801 538-5357
FAX: 801-359-3940

Date: February 26, 2014
Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 700 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Collapse strength is (biaxially) derated for doglegs in directional wells by multiplying the tensile stress by the cross section area to calculate a

Well name:	43013527800000 GMB\125-36-8-16	
Operator:	NEWFIELD PRODUCTION COMPANY	
String type:	Production	Project ID: 43-013-52780
Location:	DUCHESNE COUNTY	

Design parameters:**Collapse**

Mud weight: 8.400 ppg
Design is based on evacuated pipe.

Burst

Max anticipated surface pressure: 1,325 psi
Internal gradient: 0.220 psi/ft
Calculated BHP: 2,672 psi

No backup mud specified.

Minimum design factors:**Collapse:**

Design factor: 1.125

Burst:

Design factor: 1.00

Tension:

8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.60 (B)

Tension is based on air weight.
Neutral point: 5,392 ft

Environment:

H2S considered? No
Surface temperature: 74 °F
Bottom hole temperature: 160 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 1,000 ft

Cement top: 809 ft

Directional Info - Build & Hold

Kick-off point: 600 ft
Departure at shoe: 773 ft
Maximum dogleg: 1.5 °/100ft
Inclination at shoe: 8.38 °

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost (\$)
1	6178	5.5	15.50	J-55	LT&C	6122	6178	4.825	21815
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	2672	4040	1.512	2672	4810	1.80	94.9	217	2.29 J

Prepared by: Helen Sadik-Macdonald
Div of Oil, Gas & Mining

Phone: 801 538-5357
FAX: 801-359-3940

Date: February 21, 2014
Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 6122 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Collapse strength is (biaxially) derated for doglegs in directional wells by multiplying the tensile stress by the cross section area to calculate a



Diana Mason <dianawhitney@utah.gov>

Newfield Wells

Jeff Conley <jconley@utah.gov>

Thu, Mar 20, 2014 at 9:46 AM

To: Bradley Hill <bradhill@utah.gov>, Diana Mason <dianawhitney@utah.gov>

Cc: mcrozier@newfield.com

Hello,

The following wells have been approved by SITLA including arch and paleo:

(4301352781) GMBU 119-32-8-17

(4301352780) GMBU 125-36-8-16

Thanks,

--

Jeff Conley
SITLA Resource Specialist
jconley@utah.gov
801-538-5157

ON-SITE PREDRILL EVALUATION

Utah Division of Oil, Gas and Mining

Operator NEWFIELD PRODUCTION COMPANY
Well Name GMBU 125-36-8-16
API Number 43013527800000 **APD No** 9272 **Field/Unit** MONUMENT BUTTE
Location: 1/4,1/4 SESE **Sec** 36 **Tw** 8.0S **Rng** 16.0E 672 FSL 818 FEL
GPS Coord (UTM) 580050 4435832 **Surface Owner**

Participants

corie miller - NFX , Ed Bonner- SITLA

Regional/Local Setting & Topography

this is a new well on an existing pad
 Host well is the 16-36R-8-16. It also hosts the T-36
 This location is a perennial problem site. It is routinely flooded and soils are being eroded into the adjacent stream. The location is at the bottom of a deep and narrow draw with a network of unprotected drainages and streams that must be crossed several times to access pad. The streams carry running water during all 4 seasons of the year but, may dry up during the hottest weeks of summer and coldest weeks of winter. The new disturbance will extend to the high water mark of the stream north and intersect the drainages on the East and West of pad. The existing topsoil stockpile shows evidence of erosion. Plans show the access road to be lowered increasing the volume of water transmitted onto location. Reserve pit is planned on North side of location adjacent the largest stream.

Surface Use Plan

Current Surface Use

Existing Well Pad

New Road

Miles

0

Well Pad

Width 200 Length 300

Src Const Material

Onsite

Surface Formation

UNTA

Ancillary Facilities

Waste Management Plan Adequate?

Environmental Parameters

Affected Floodplains and/or Wetlands Y

bottom of a major draw

Flora / Fauna

existing pad with no native vegetation and imported or disturbed clay soils

Soil Type and Characteristics

heavy clays

Erosion Issues Y

evidence of erosion to surrounding soils

Sedimentation Issues Y

soil stockpiles are missing original mass

Site Stability Issues Y

Native soils are heavy clays and exasperate the flooding and stability problems

Drainage Diversion Required? Y

Major dirt work needed to divert drainages and stream

Berm Required? Y

Erosion Sedimentation Control Required? Y

Paleo Survey Run? N Paleo Potential Observed? N Cultural Survey Run? N Cultural Resources? N

Reserve Pit

Site-Specific Factors		Site Ranking
Distance to Groundwater (feet)	75 to 100	10
Distance to Surface Water (feet)		20
Dist. Nearest Municipal Well (ft)	>5280	0
Distance to Other Wells (feet)		20
Native Soil Type	Mod permeability	10
Fluid Type	Fresh Water	5
Drill Cuttings	Normal Rock	0
Annual Precipitation (inches)		0
Affected Populations		
Presence Nearby Utility Conduits	Not Present	0
	Final Score	65 1 Sensitivity Level

Characteristics / Requirements

Reserve pit planned but I think a closed loop system is warranted due to proximity to stream. Other wells upstream in this feature were drilled recently closed loop

Closed Loop Mud Required? Y Liner Required? Y Liner Thickness 16 Pit Underlayment Required? Y

Other Observations / Comments

This location needs a lot of work. The access road is planned to be lowered. This will make diversion off to the sides impossible and will funnel flows onto the pad. This pad is already flooded most of the year. The heavy clays retard the infiltration of any water. I have been stuck in 4wd on this location in the past. The north side of the road will need to be removed so that it is not higher than the road and flows can escape back into the stream. The south will need to be left high to divert flows from the hillside from entering road and divert flows from the west. The topsoil pile will need to be moved as it is being washed away in its current location. I think a closed loop system is wise here as reserve pit is planned adjacent the stream and there are drainages opposite. I have stability concerns because of the heavy clays. This location SCREAMS for gravels to be imported and location capped for stability, safety and flooding. In a perfect world, I would like to see provisions for the water crossings.

API Well Number: 43013527800000

Chris Jensen
Evaluator

2/5/2014
Date / Time

RECEIVED: March 20, 2014

**Application for Permit to Drill
Statement of Basis
Utah Division of Oil, Gas and Mining**

APD No	API WellNo	Status	Well Type	Surf Owner	CBM
9272	43013527800000	LOCKED	OW	S	No
Operator	NEWFIELD PRODUCTION COMPANY		Surface Owner-APD		
Well Name	GMBU 125-36-8-16		Unit	GMBU (GRRV)	
Field	MONUMENT BUTTE		Type of Work	DRILL	
Location	SESE 36 8S 16E S 672 FSL 818 FEL GPS Coord (UTM) 580051E 4435831N				

Geologic Statement of Basis

Newfield proposes to set 300' of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 700'. A search of Division of Water Rights records shows no water wells within a 10,000 foot radius of the center of Section 36. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water. Surface casing should be extended to cover the base of the moderately saline ground water.

Brad Hill
APD Evaluator

2/19/2014
Date / Time

Surface Statement of Basis

Location is proposed in a poor location although on an existing pad. Access road enters the pad from the East. The landowner and its representative was in attendance for the pre-site inspection.

The soil type and topography at present do combine to pose a significant threat to erosion or sediment/ pollution transport in these regional climate conditions.

Usual construction standards of the Operator do not appear to be adequate for the proposed purpose as submitted. Plans lack measures for importing materials, using a geogrid or compacting native soils to improve stability. Existing topsoil stockpiles are in danger of erosion.

I recognize no special flora or animal species or cultural resources on site that the proposed action may harm. Drainages / stream area can be found adjacent the site to the East, North and South. The location was not previously surveyed for cultural and paleontological resources (as the operator saw fit). I have advised the operator take all measures necessary to comply with ESA and MBTA and that actions insure no disturbance to species that may have not been seen during onsite visit.

The location should be bermed to prevent fluids from entering or leaving the confines of the pad. Fencing around the reserve pit will be necessary to prevent wildlife and livestock from entering. Measures (BMP's) shall be taken to protect steep slopes and topsoil pile from erosion, sedimentation and stability issues. A diversion is to be built sufficient to conduct overland or channel flow from a natural channels surrounding the pad to reintroduce flows back into the natural channel offsite. Care to be taken that diversion of water does not impact or erode topsoil pile near corner 8 or topsoils will need to be stored elsewhere onsite. Plans to be resubmitted as a sundry reflecting these changes

Chris Jensen
Onsite Evaluator

2/5/2014
Date / Time

Conditions of Approval / Application for Permit to Drill

Category	Condition
	Measures (BMP's) shall be taken to protect steep slopes and topsoil pile from erosion, sedimentation and stability issues.
Pits	A closed loop mud circulation system is required for this location.
Surface	A diversion is to be built sufficient to conduct overland or channel flow from natural channels surrounding the pad to reintroduce flows back into the natural channel offsite. Care to be taken that diversion of water does not impact or erode topsoil pile near corner 8 or topsoils will need to be stored elsewhere onsite.
Surface	The well site shall be bermed to prevent fluids from entering or leaving the pad.
Surface	Road access shall be modified to prevent conveyance of water
Surface	The reserve pit shall be fenced upon completion of drilling operations.

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 1/16/2014

API NO. ASSIGNED: 43013527800000

WELL NAME: GMBU 125-36-8-16

OPERATOR: NEWFIELD PRODUCTION COMPANY (N2695)

PHONE NUMBER: 435 646-4825

CONTACT: Mandie Crozier

PROPOSED LOCATION: SESE 36 080S 160E

Permit Tech Review:

SURFACE: 0672 FSL 0818 FEL

Engineering Review:

BOTTOM: 1439 FSL 0721 FEL

Geology Review:

COUNTY: DUCHESNE

LATITUDE: 40.06894

LONGITUDE: -110.06126

UTM SURF EASTINGS: 580051.00

NORTHINGS: 4435831.00

FIELD NAME: MONUMENT BUTTE

LEASE TYPE: 3 - State

LEASE NUMBER: ML-22061

PROPOSED PRODUCING FORMATION(S): GREEN RIVER

SURFACE OWNER: 3 - State

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

- PLAT
- Bond: STATE - B001834
- Potash
- Oil Shale 190-5
- Oil Shale 190-3
- Oil Shale 190-13
- Water Permit: 437478
- RDCC Review:
- Fee Surface Agreement
- Intent to Commingle

Commingle Approved

LOCATION AND SITING:

- R649-2-3.
- Unit: GMBU (GRRV)
- R649-3-2. General
- R649-3-3. Exception
- Drilling Unit
- Board Cause No: Cause 213-11
- Effective Date: 11/30/2009
- Siting: Suspends General Siting
- R649-3-11. Directional Drill

Comments: Presite Completed

Stipulations: 5 - Statement of Basis - bhill
 12 - Cement Volume (3) - hmacdonald
 15 - Directional - dmason
 25 - Surface Casing - hmacdonald
 27 - Other - bhill



GARY R. HERBERT
Governor

SPENCER J. COX
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: GMBU 125-36-8-16

API Well Number: 43013527800000

Lease Number: ML-22061

Surface Owner: STATE

Approval Date: 3/20/2014

Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. 40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis (copy attached).

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

Cement volume for the 5 1/2" production string shall be determined from actual hole diameter in order to place cement from the pipe setting depth back to surface as indicated in the submitted drilling plan.

Surface casing shall be cemented to the surface.

Additional Approvals:

The operator is required to obtain approval from the Division of Oil, Gas and mining before performing any of the following actions during the drilling of this well:

- Any changes to the approved drilling plan - contact Dustin Doucet
- Significant plug back of the well - contact Dustin Doucet
- Plug and abandonment of the well - contact Dustin Doucet

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well - contact Carol Daniels
OR
submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website
at <http://oilgas.ogm.utah.gov>
- 24 hours prior to testing blowout prevention equipment - contact Dan Jarvis
- 24 hours prior to cementing or testing casing - contact Dan Jarvis
- Within 24 hours of making any emergency changes to the approved drilling program
- contact Dustin Doucet
- 24 hours prior to commencing operations to plug and abandon the well - contact Dan Jarvis

Contact Information:

The following are Division of Oil, Gas and Mining contacts and their telephone numbers (please leave a voicemail message if the person is not available to take the call):

- Carol Daniels 801-538-5284 - office
- Dustin Doucet 801-538-5281 - office
801-733-0983 - after office hours
- Dan Jarvis 801-538-5338 - office
801-231-8956 - after office hours

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) - due within 5 days of spudding the well
- Monthly Status Report (Form 9) - due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) - due prior to implementation
- Written Notice of Emergency Changes (Form 9) - due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) - due prior to implementation
- Report of Water Encountered (Form 7) - due within 30 days after completion
- Well Completion Report (Form 8) - due within 30 days after completion or plugging

Approved By:

Approved by:

A handwritten signature in black ink, appearing to read "J. Rogers", written in a cursive style.

For John Rogers
Associate Director, Oil & Gas

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
5. LEASE DESIGNATION AND SERIAL NUMBER: ML-22061	
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	
6. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)	
8. WELL NAME and NUMBER: GMBU 125-36-8-16	
9. API NUMBER: 43013527800000	
9. FIELD and POOL or WILDCAT: MONUMENT BUTTE	
9. FIELD and POOL or WILDCAT: MONUMENT BUTTE	
COUNTY: DUCHESNE	
STATE: UTAH	
1. TYPE OF WELL Oil Well	
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY	
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052	
PHONE NUMBER: 435 646-4825 Ext	
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0672 FSL 0818 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESE Section: 36 Township: 08.0S Range: 16.0E Meridian: S	

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 3/20/2015	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield proposes to extend the Application for Permit to Drill this well.

Approved by the
Feb Davis, 02, 2015
Oil, Gas and Mining

Date: _____
By: 

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 1/28/2015	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013527800000

API: 43013527800000

Well Name: GMBU 125-36-8-16

Location: 0672 FSL 0818 FEL QTR SESE SEC 36 TWNP 080S RNG 160E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 3/20/2014

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Mandie Crozier

Date: 1/28/2015

Title: Regulatory Tech Representing: NEWFIELD PRODUCTION COMPANY

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
5. LEASE DESIGNATION AND SERIAL NUMBER: ML-22061	
6. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)	
8. WELL NAME and NUMBER: GMBU 125-36-8-16	
9. API NUMBER: 43013527800000	
9. FIELD and POOL or WILDCAT: MONUMENT BUTTE	
COUNTY: DUCHESNE	
STATE: UTAH	

SUNDRY NOTICES AND REPORTS ON WELLS
 Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL Oil Well
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052
PHONE NUMBER: 435 646-4825 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0672 FSL 0818 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESE Section: 36 Township: 08.0S Range: 16.0E Meridian: S

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 3/20/2016	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
 Newfield proposes to extend the Application for Permit to Drill this well.

Approved by the
March 16, 2016
Oil, Gas and Mining

Date: _____
By: 

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 3/15/2016	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013527800000

API: 43013527800000

Well Name: GMBU 125-36-8-16

Location: 0672 FSL 0818 FEL QTR SESE SEC 36 TWNP 080S RNG 160E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 3/20/2014

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Mandie Crozier

Date: 3/15/2016

Title: Regulatory Tech **Representing:** NEWFIELD PRODUCTION COMPANY