

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**RECEIVED**  
Other Instructions on  
NOV 30 1995

Form approved.  
Budget Bureau No. 1004-0136  
Expires: December 31, 1991

LEASE DESIGNATION AND SERIAL NO.  
14-20-H62-3521

APPLICATION FOR PERMIT TO DRILL OR DEEPEN GAS & MINING  
INDIAN, ALLOTTEE OR TRIBE NAME  
UINTAH & OURAY TRIBE

1a. TYPE OF WORK  
 DRILL  DEEPEN

b. TYPE OF WELL  
 OIL WELL  GAS WELL  OTHER  SINGLE ZONE  MULTIPLE ZONE

2. NAME OF OPERATOR  
 PETROGLYPH OPERATING CO., INC.

3. ADDRESS AND TELEPHONE NO.  
 P.O. BOX 607 ROOSEVELT, UT 84066

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)  
 At surface: 759' FNL & 502' FEL NE/4 NE/4  
 At proposed prod. zone:

7. UNIT AGREEMENT NAME

8. FARMOR LEASE NAME WELL NO.  
 UTE TRIBAL

9. API WELL NO.  
 #1A-32

10. FIELD AND POOL, OR WILDCAT  
 ANTELOPE CREEK

11. SEC., T., R., M., OR BLE. AND SURVEY OR AREA  
 Sec. 32, T5S, R3W

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE\*  
 24.4 miles southwest of Myton, UT

15. DISTANCE FROM PROPOSED\* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drig. unit line, if any)  
 502'

16. NO. OF ACRES IN LEASE  
 640

17. NO. OF ACRES ASSIGNED TO THIS WELL  
 40

18. DISTANCE FROM PROPOSED LOCATION\* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT.

19. PROPOSED DEPTH  
 5575'

20. ROTARY OR CABLE TOOLS  
 Rotary

21. ELEVATIONS (Show whether DP, BT, GR, etc.)  
 6622.2' Graded Ground

22. APPROX. DATE WORK WILL START\*  
 November, 1995

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4	8 5/8	24.0#	250'	135 sx class "G" + 2% CaCl <sub>2</sub>
7 7/8	5 1/2	15.5#	5575'	+ 1/4 #/sx celloflake. 50/50 POZMIX + 2% GEL + 10% SALT TO 400' ABOVE ALL ZONES OF INTEREST (+ 10% EXCESS) LIGHT CEMENT (11 PPG±) + LCM TO 200' ABOVE OIL SHALE OR FRESH WATER INTERVALS (+ 5% EXCESS)

pc: Utah Division of Oil, Gas & Mining  
 Bureau of Indian Affairs, Fort Duchesne, UT  
 Uintah & Ouray Tribe, Fort Duchesne, UT

PETROGLYPH OPERATING COMPANY INC. WILL BE THE DESIGNATED OPERATOR OF THE SUBJECT WELL UNDER BOND #B04556.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED [Signature] TITLE Agent for Petroglyph DATE 11-27-1995

(This space for Federal or State office use)


PERMIT NO. 43-013-31577 APPROVAL DATE \_\_\_\_\_

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
 CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY [Signature] TITLE Petroleum Engineer DATE 12/12/95

\*See Instructions On Reverse Side

**T5S, R3W, U.S.B.&M.**

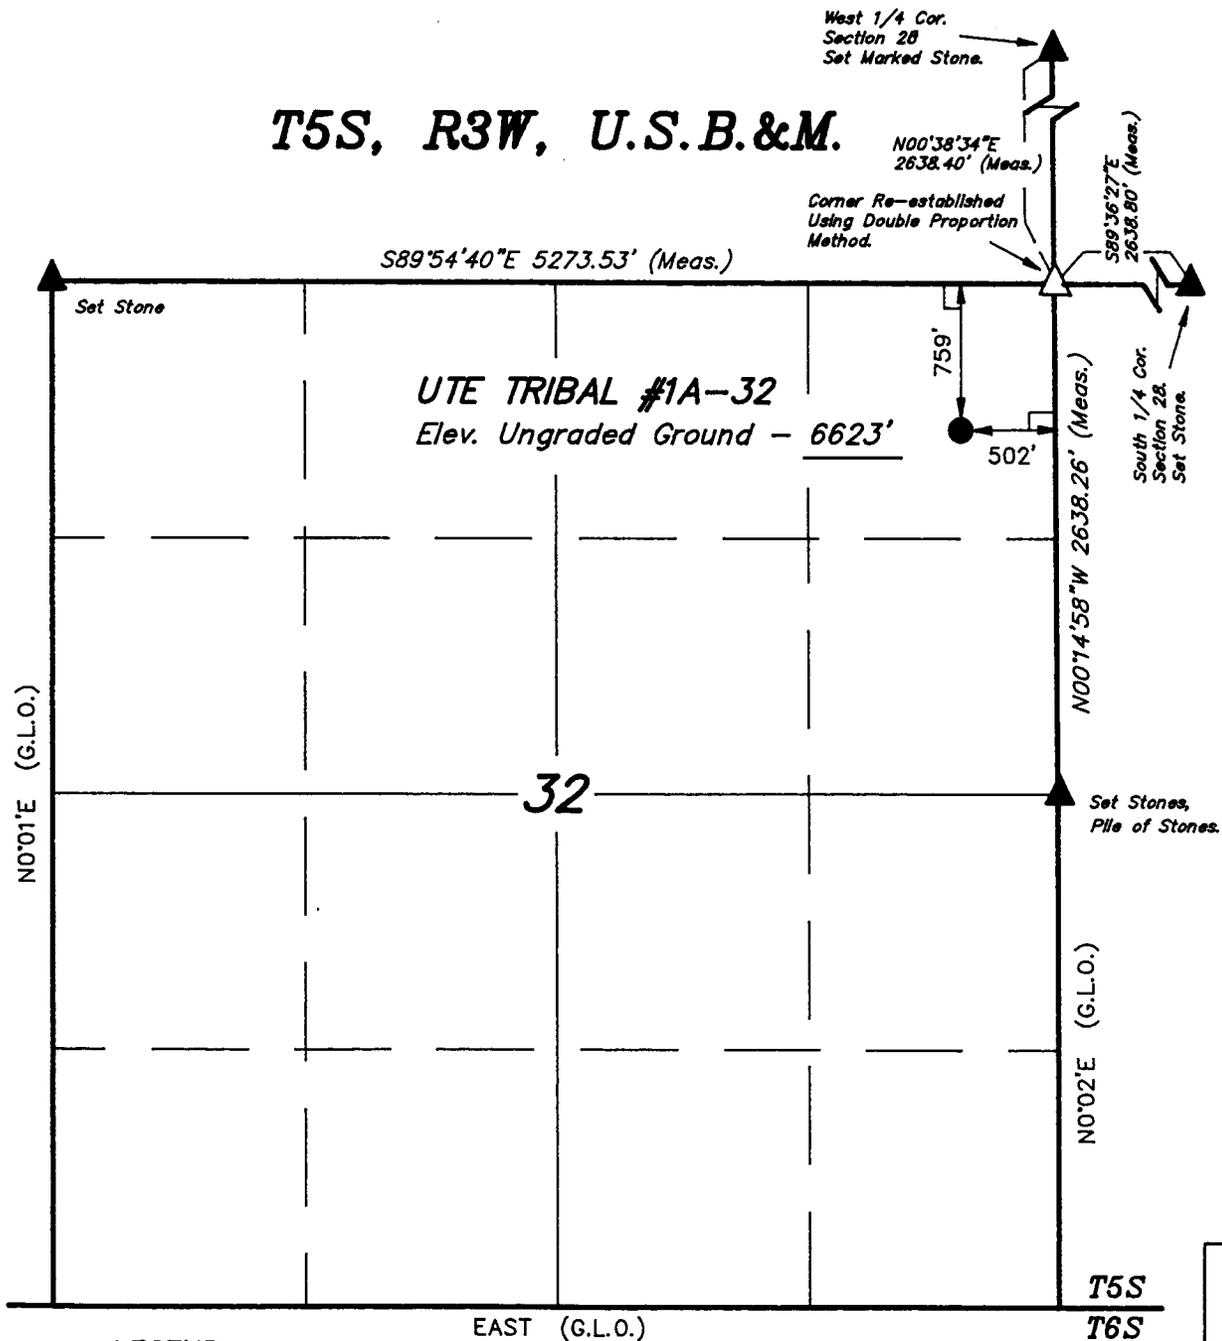


**PETROGLYPH OPERATING CO., INC.**

Well Location, UTE TRIBAL #1A-32, located as shown in NE 1/4 NE 1/4 of Section 32, T5S, R3W, U.S.B.&M. Duchesne County, Utah.

**BASIS OF ELEVATION**

SPOT ELEVATION AT THE SOUTHWEST CORNER OF SECTION 29, T5S, R3W, U.S.B.&M. TAKEN FROM THE DUCHESNE SE QUADRANGLE, UTAH, DUCHESNE COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 6680 FEET.

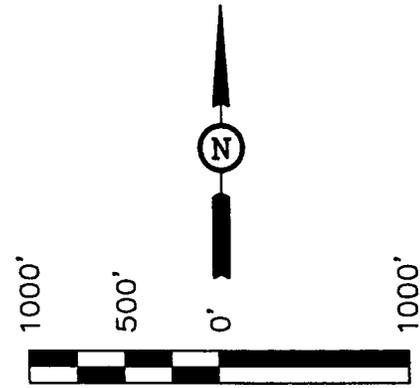

SCALE  
CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

*Robert L. Kay*  
REGISTERED LAND SURVEYOR  
REGISTRATION NO. 161319  
STATE OF UTAH

**LEGEND:**

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.
- △ = SECTION CORNERS RE-ESTABLISHED (Not Set on Ground)

<b>UNTAH ENGINEERING &amp; LAND SURVEYING</b>		
85 SOUTH 200 EAST - VERNAL, UTAH 84078		
(801) 789-1017		
SCALE 1" = 1000'	DATE SURVEYED: 10-3-95	DATE DRAWN: 10-16-95
PARTY G.S. J.K. D.J.S.	REFERENCES G.L.O. PLAT	
WEATHER COOL	FILE PETROGLYPH OPERATING CO., INC.	

Petroglyph Operating Co., Inc.  
P.O. Box 1839  
Hutchinson, KS 67504-1839



November 27, 1995

Mr. Frank Matthews, Petroleum Engineer,  
Utah Division of Oil, Gas, and Mining  
3 Triad Center, Ste. 350  
Salt Lake City, UT 84180-1203

RE: APPLICATION FOR PERMIT TO DRILL  
UTE TRIBAL #1A-32  
NE/NE SEC. 32, T5S, R3W  
DUCHESNE COUNTY, UTAH  
LEASE NO. BIA 14-20-H62-3521  
UTE TRIBAL LANDS

Dear Mr. Matthews:

Enclosed please find a copy of the Application for Permit to Drill and associated attachments for the referenced well.

Please address further communication regarding this matter (including approval) to:

Ed Trotter  
P.O. Box 1910  
Vernal, UT 84078  
Phone # (801) 789-4120  
Fax # (801) 789-1420

Sincerely,

A handwritten signature in cursive script that reads "Ed Trotter".

Ed Trotter  
Agent

Petroglyph Operating Co., Inc.

Attachments

/EHT/dmt

EIGHT POINT PLAN

UTE TRIBAL # 1A-32  
NE/NE SEC. 32, T5S R3W  
DUCHESNE COUNTY, UTAH

1. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:

FORMATIONS	DEPTH	SUBSEA
Mahagony Shale	2860	3760
'X' marker	4394	2226
'Y' marker	4430	2190
Douglas Creek	4535	2085
"B" Limestone	4849	1771
B/Castle Peak Limestone	5399	1221
Basal Carbonate Limestone	5875	745
Total Depth	5575	1045

Anticipated BHP                      2400 psi

2. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS FORMATIONS:

Substance	Formation	Depth	Subsea
Fresh Water	400' ZN	505	6115
Fresh Water	1200' ZN	1257	5363
Oil/Gas	Douglas Creek	4535	2085
Oil/Gas	B/Castle Peak	5399	1221
Other mineral zones	N/A		

Cuttings to be collected in 20' intervals until 4714'. Thereafter, samples will be collected in 10' intervals until T.D..

Geologist may alter sample collection at discretion.

3. PRESSURE CONTROL EQUIPMENT : BOP Schematic Diagram attached.

4. CASING PROGRAM :

HOLE SIZE	INTERVAL	LENGTH	SIZE	WEIGHT	GRADE	MINIMUM SAFETY FACTOR		
						COLLAPSE	BURST	TENSILE
12 1/4	0' - 250'	250'	8 5/8	24.0 #	J-55	1370 PSI	2950 PSI	263,000#
7 7/8	0' - 5575'	5575'	5 1/2	15.5 #	J-55	4040 PSI	4810 PSI	202,000#

All casing will be new or inspected.

EIGHT POINT PLAN

UTE TRIBAL # 1A-32  
NE/NE SEC. 32, T5S R3W  
DUCHESNE COUNTY, UTAH

5. MUD PROGRAM

INTERVAL

0' - 250'  
250' - 4000'  
4000' - TD  
TD

MUD TYPE

Air  
Air/Mist & Aerated Water  
Air/3% KCL water or KCL substitute  
Gel/polyacrylamide polymer w/5-10% LCM

Sufficient mud inventory will be maintained on location during drilling to handle any adverse conditions that may arise.

6. VARIANCE REQUESTS:

- A. Petroglyph Operating Co., Inc. requests a variance to regulations requiring a straight run blooie line.
- B. Petroglyph Operating Co., Inc. requests a variance to regulations requiring an automatic ignitor or continuous pilot light on the blooie line.

7. EVALUATION PROGRAM:

Logs: Mud Logging	T.D. to base of surface csg.
Compensated Density-Compensated Neutron Log	T.D. to base of surface csg.
Dual Laterolog - Micro-SFL	T.D. to base of surface csg.
Numar (Magnetic Resonance Imaging Log)	@ Geologists discretion

Cores: None Programmed  
DST': None Programmed

Completion: To be submitted at a later date.

8. ABNORMAL CONDITIONS:

None anticipated.

EIGHT POINT PLAN

UTE TRIBAL # 1A-32  
NE/NE SEC. 32, T5S R3W  
DUCHESNE COUNTY, UTAH

9. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

10. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.


(Attachment: BOP Schematic Diagram)

## 2000 PSIG DIAGRAM

BOTH RAMS ARE 2000 PSIG RATED.  
CASING FLANGE IS 9" 2000 PSIG RATED.  
BOPE 9" 2000 PSIG

### TESTING PROCEDURE:

1. BOPE 's will be tested with a professional tester to conform to Onshore Order #2 with retest every 14 days.
2. Blind & Pipe rams will be tested to rated working pressure, 2000 psig
3. Casing will be tested to 0.22 psi/ft. or 1500 psig. Not to exceed 70% of burst strength, whichever is greater.
4. All lines subject to well pressure will be pressure tested to the same pressure as blind & pipe rams.
5. All BOPE specifications and configurations will meet Onshore Order #2 requirements for 2000 psig BOPE specifications.

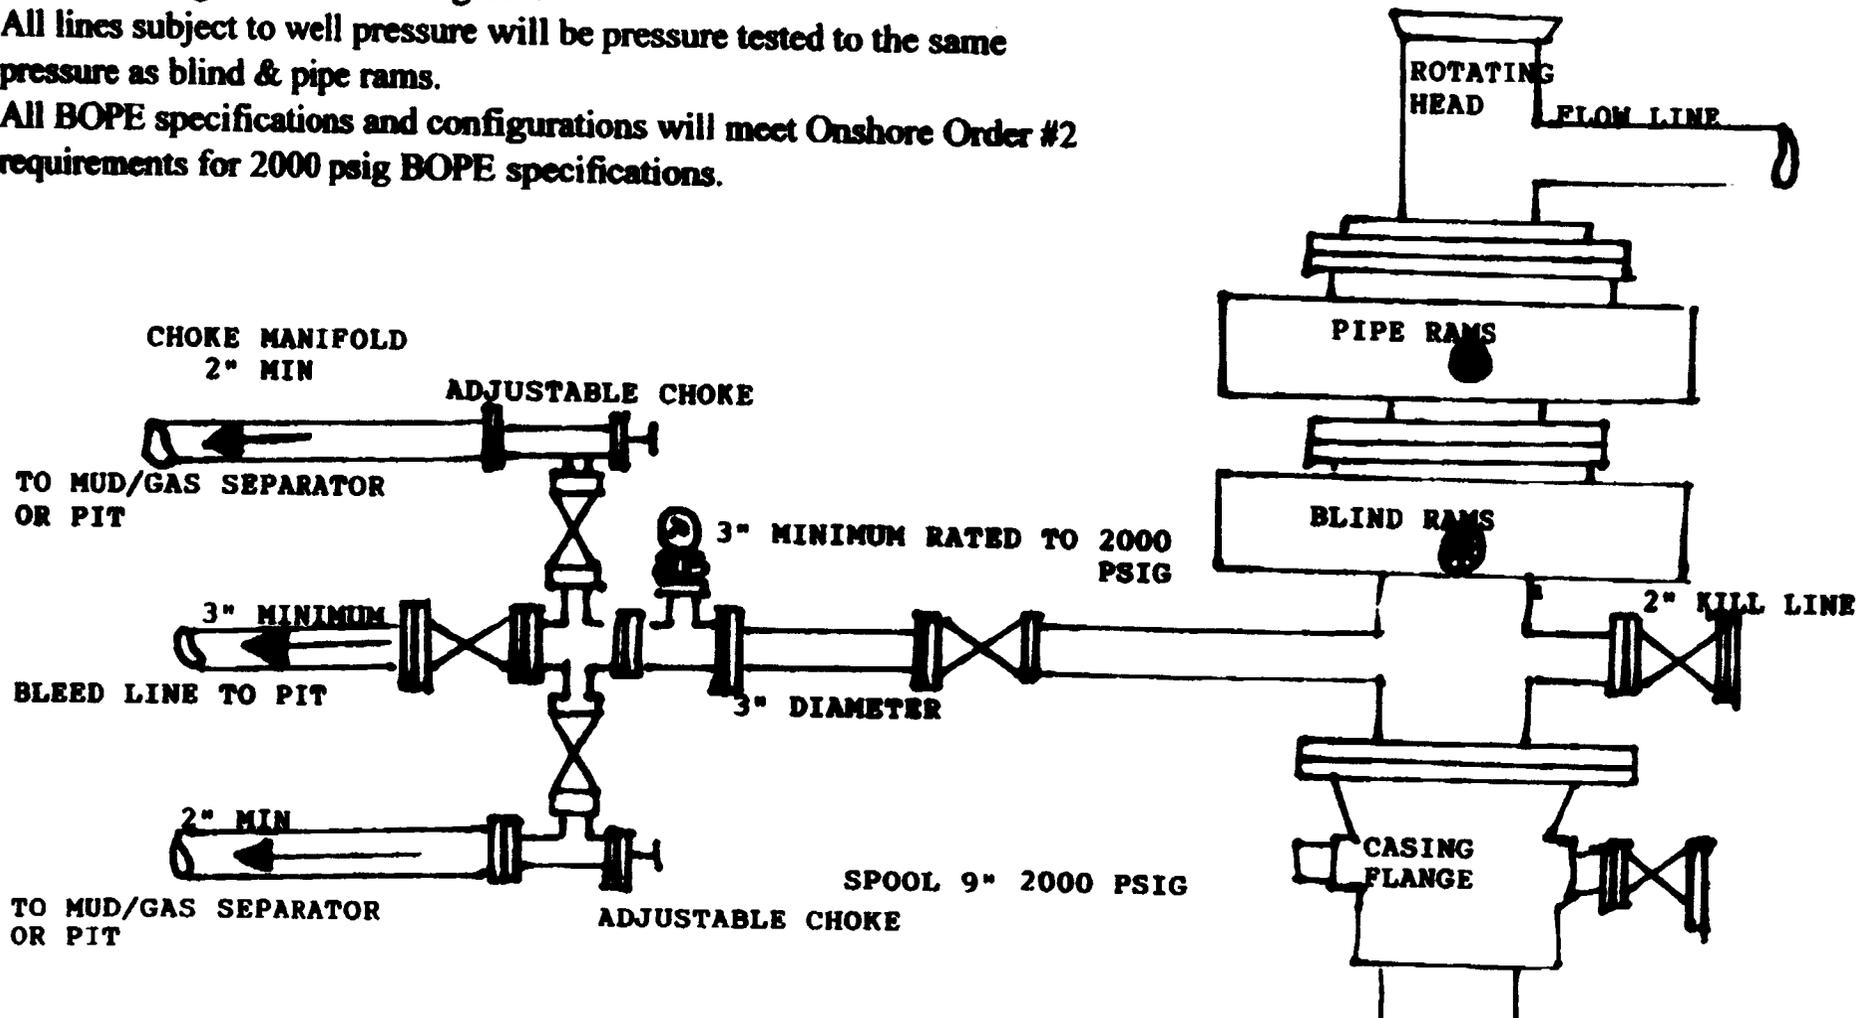

CONDITIONS OF APPROVAL  
FOR THE SURFACE USE PROGRAM OF THE  
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Petroglyph Operating Co., Inc.  
Well Name & Number: Ute Tribal #1A-32  
Lease Number: BIA 14-20-H62-3521  
Location: 759' FNL & 502' FEL NE/NE, Sec. 32, T5S R3W  
Surface Ownership: Ute Indian Tribe

NOTIFICATION REQUIREMENTS

Location Construction - forty-eight (48) hours prior to construction of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice - at least twenty-four (24) hours prior to spudding the well.

Casing String and Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.

BOP and related Equipment Tests - twenty-four (24) hours prior to running casing and tests.

First Production Notice - within five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice To Drill and Surface Use Program.

## THIRTEEN POINT SURFACE USE PROGRAM

### 1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing road.
- B. The proposed well site is located approximately 24.4 miles southwest of Myton, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

### 2. PLANNED ACCESS ROAD

- A. The access road will be approximately 0.2 miles in length. See attached TOPO Map "B"
- B. The access road has a 30 foot ROW w/18 foot running surface.
- C. Maximum grade on access road will be 8%
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. One 18" diameter X 40' length culvert will be installed in the access road adjacent to the location.
- G. The access road will be dirt surface.
- H. No gates, cattleguards or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

All travel will be confined to existing access road Right-of-Way. Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service Publication: Surface Operating Standards For Oil & Gas Exploration and Development, (1989).

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the

roadbed as necessary to provide a well-constructed safe road.

Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of- Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, Petroglyph Operating Co., Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

3. LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION

- A. Water wells - None
  - B. Abandoned wells - None
  - C. Temporarily abandoned wells - None.
  - D. Disposal wells - None.
  - E. Drilling wells - None.
  - F. Producing wells - 8\*
  - G. Shut in wells - None
  - H. Injection wells - None
- (\*See attached TOPO map "C" for location)

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

A. ON WELL PAD

- 1. Tank batteries - Yes
- 2. Production facilities-To be submitted later
- 3. Oil gathering lines - None

4. Gas gathering lines-None
5. Injection lines - None
6. Disposal lines - None
7. Surface pits - None

**B. OFF WELL PAD**

1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
2. A 3" OD steel above ground gas sales line will be laid approximately 1050' from proposed location to a point in the NW/NW of Section 33, T5S, R3W, where it will tie into Petroglyph Operating Co., Inc.'s existing gas sales line. Proposed pipeline crosses Ute Tribe lands, thus a Right-of-Way grant will be required. See attached TOPO Map D showing pipeline route.
3. Proposed pipeline will be a 3" OD steel, welded line laid on the surface.
4. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery, unless more stringent protective requirements are deemed necessary by the authorized officer.

The production facilities will be placed on the South side of the location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities required will be painted within 6 months of installation. Facilities required to comply with O.S.H.A.

(Occupational Safety and Health Act) will be excluded.  
The required paint color is Desert Brown.

5. LOCATION & TYPE OF WATER SUPPLY

- A. Water supply will be from Target Trucking's Roosevelt Brine Storage and/or Target's water source in SE 1/4, Sec. 1, T 4S, R 5W Duchesne County, Utah (State water right #43-10152). All water will come from a non-depletable source.
- B. Water will be hauled by Target Trucking.
- C. No water well will be drilled on lease.

6. SOURCE OF CONSTRUCTION MATERIAL

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of location.
- B. All construction material will come from Ute Tribal Land.
- C. No mineral materials will be required.

7. METHODS OF HANDLING WASTE DISPOSAL

A. METHODS AND LOCATION

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at an approved waste disposal facility.
- 4. Produced waste water will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. During the 90 day period, an application for approval of a permanent disposal method and location, together with the required water analysis, will be submitted for the AO's approval.

5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on drilling rig to avoid leakage of oil to pit.

B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to reserve pit will be avoided by flaring them off in flare pit at time of recovery.

Burning of trash will not be allowed. All trash must be contained in a trash cage and hauled away to an approved disposal site at the completion of the drilling activities.

On BIA administered land:

All reserve pits will be lined with either native clay, commercial bentonite or plastic sufficient to prevent seepage. (If a plastic nylon reinforced liner is used, it shall be torn and perforated after the pit dries and before backfilling of the reserve pit).

A 12 mill liner shall be installed in the reserve pit.

\_\_\_To protect the environment:

If the reserve pit is lined the operator will provide the BIA with a chemical analysis of the fluids in that pit no later than 90 days after the well completion to determine the method for final reclamation of the reserve pit. If the elemental concentrations shown by the chemical analysis exceeds the requirements described by part II, Standards of Quality for Waters of the State, Wastewater Disposal Regulations, State of Utah Division of Health, the contents and liner will be removed and disposed of at an authorized disposal site.

\_\_\_To protect the environment (without a chemical analysis)  
reserve pits will be constructed so as not to leak, break, or allow discharge of liquids.

\_\_\_Storage tanks will be used if drill sites are located on tribal

irrigable land, flood plains, or on lands under crop production. After first production, produced waste water will be confined to a lined pit or storage tank for a period not to exceed ninety (90) days. During the 90 day period, in accordance with NTL-2B, an application for approval of a permanent disposal method and location, along with required water analysis, shall be submitted for the AO's approval. Failure to file an application within the time allowed will be considered an incident of noncompliance.

#### 8. ANCILLARY FACILITIES

- A. No airstrips or camps are planned for this well.

#### 9. WELL SITE LAYOUT

- A. Refer to attached well site plat for related topography cuts and fills & cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation parking areas, and access road.

The reserve pit will be located on the North side of the location.

The flare pit will be located downwind of the prevailing wind direction on the North side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled topsoil will be stored on the Southwest end.

Access to the well pad will be from the North.

N/A Diversion ditch(es) shall be constructed on the \_\_\_\_\_ side of the location (above/below) the cut slope, draining to the \_\_\_\_\_

N/A Soil compacted earthen berm(s) shall be placed on the \_\_\_\_\_ side(s) of the location between the \_\_\_\_\_

N/A The drainage(s) shall be diverted around the sides of the well pad location.

N/A The reserve pit and/or pad locations shall be constructed long and narrow for topographic reasons \_\_\_\_\_

X Corners No. 2 & 8 will be rounded off to minimize the excavation.

## FENCING REQUIREMENTS

All pits will be fenced according to the following minimum standards:

- A. 39 inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16'.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BIA or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is to be regularly travelled. If the well is a producer, the cattleguards (~~shall/ shall not~~) be permanently mounted on concrete bases. Prior to a new road, crossing any fence located on federal land, or any fence between federal land and private land, the operator will contact the BIA, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to

satisfy himself/herself that the fence is adequately braced and tied off.

## 10. PLANS FOR RESTORATION OF SURFACE

### A. PRODUCING LOCATION

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 120 days from the date of well completion (weather permitting). Before any dirt work takes place, the reserve pit will be completely dry and all cans, barrels, pipe, fluid, and hydrocarbons, will be removed.

Contact appropriate surface management agency for required seed mixture.

### B. DRY HOLE/ABANDONED LOCATION

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and BIA will attach the appropriate surface rehabilitation conditions of approval.

#### ON BIA Administered lands:

Abandoned well sites, roads, or other disturbed areas will be restored to near their original condition. This procedure will include: (a) reestablishing irrigation systems where applicable, (b) reestablishing soil conditions in irrigated fields in such a way as to ensure cultivation and harvesting of crops and, (c) ensuring revegetation of the disturbed areas to the specifications of the Ute Indian Tribe or the BIA at the time of abandonment.

11. SURFACE OWNERSHIP

Access road: Ute Indian Tribe  
Location: Ute Indian Tribe

12. OTHER INFORMATION

A. Petroglyph Operating Co., Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:  
-whether the materials appear eligible for the National Register of historic Places;

the mitigation measures the operator will likely have to undertake before the site can be used.

-a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

B. As operator, Petroglyph Operating Co., Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BIA,

or the appropriate County Extension Office. On BIA administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.

- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on Tribal Lands after the conclusion of drilling operations or at any other time without BIA authorization. However, if BIA authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

On BIA administered land:

Operator's employees, including subcontractors, will not gather firewood along roads constructed by operators. If wood cutting is required, a permit will be obtained from the Forestry Department of the BIA pursuant to 25 CFR 169.13 "Assessed Damages Incident to Right-of-Way authorization". All operators, subcontractors, vendors, and their employees or agents may not disturb saleable timber (including firewood) without a duly granted wood permit from the BIA Forester.

If the surface rights are owned by the Ute Indian Tribe and mineral rights are owned by another entity, an approved right-of-way will be obtained from the BIA before the operator begins any construction activities. If the surface is owned by another entity and the mineral rights are owned by the Ute Indian Tribe, rights-of-way will be obtained from the other entity.

All roads constructed by operators on the Uintah and Ouray Indian Reservation will have appropriate signs. Signs will be neat and of sound construction. They will state: (a) that the land is owned by the Ute Indian Tribe, (b) the name of the operator, (c) that firearms are prohibited to all non-Ute Tribal members (d) that permits must be obtained from the BIA before cutting firewood or other timber products, and (e) only authorized personnel permitted. All well site locations on the Uintah and Ouray Indian Reservation will have an appropriate sign indicating the name of the operator,

the lease serial number, the well name and number, the survey description of the well (either footage or the quarter-quarter section, the section, township, and range).

Additional Surface Stipulations

N/A No construction or drilling activities shall be conducted between

\_\_\_\_\_ and \_\_\_\_\_ because of \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

N/A No surface occupancy will be allowed within 1,000 feet of any sage grouse strutting ground.

N/A No construction or exploration activities are permitted within 1.5 mile radius of sage grouse strutting grounds from April 1 to June 30.

N/A There shall be no surface disturbance within 600 feet of live water (includes stock tanks, springs, and guzzlers).

N/A No cottonwood trees will be removed or damaged.

N/A Pond will be constructed according to BLM specifications approximately \_\_\_\_\_ ft. \_\_\_\_\_ of the location, as flagged on onsite.

LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION

PERMITTING

Ed Trotter  
1620 West 750 North  
Vernal UT 84078  
Telephone # (801)789-4120  
Fax # (801) 789-1420

OPERATIONS

Dan Lindsey  
P.O. Box 607  
Roosevelt, UT 84066  
(801) 722-2531  
Fax # (801) 722-9145

All lease/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. Petroglyph Operating Co., Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.

The BIA Office shall be notified upon site completion prior to moving on the drilling rig.

Certification:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in the Plan are to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Petroglyph Operating Co., Inc. and its contractors and sub-contractors in conformity with this Plan and the terms and conditions under which it is approved.



11-27-95  
Date

  
\_\_\_\_\_

# PETROGLYPH OPERATING CO., INC.

## LOCATION LAYOUT FOR

UTE TRIBAL #1A-32  
SECTION 32, T5S, R3W, U.S.B.&M.  
759' FNL 502' FEL

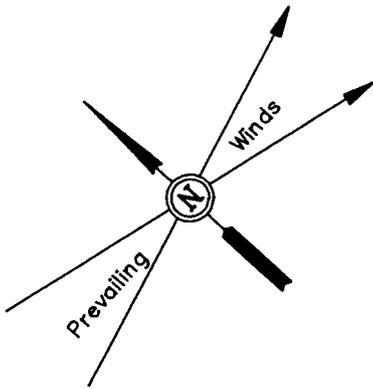

SCALE: 1" = 50'  
DATE: 10-16-95  
Drawn By: D.J.S.

**NOTE:**

Flare Pit is to be located a min. of 100' from the Well Head.

Reserve Pit Backfill & Spoils Stockpile

FLARE PIT

El. 18.1'  
**C-3.7'**  
(btm. pit)

NOTE:  
Pit Capacity W/2' of Freeboard is ±4,800 Bbls.

El. 13.8'  
**F-0.2'**  
(btm. pit)

Reserve Pit Backfill & Spoils Stockpile

El. 21.0'  
**F-1.0'**

El. 23.6'  
**C-1.6'**


**F-2.3'**  
El. 19.7'

**F-4.2'**  
El. 17.8'

**F-8.5'**  
El. 13.5'

Sta. 2+75

Approx. Toe of Fill Slope

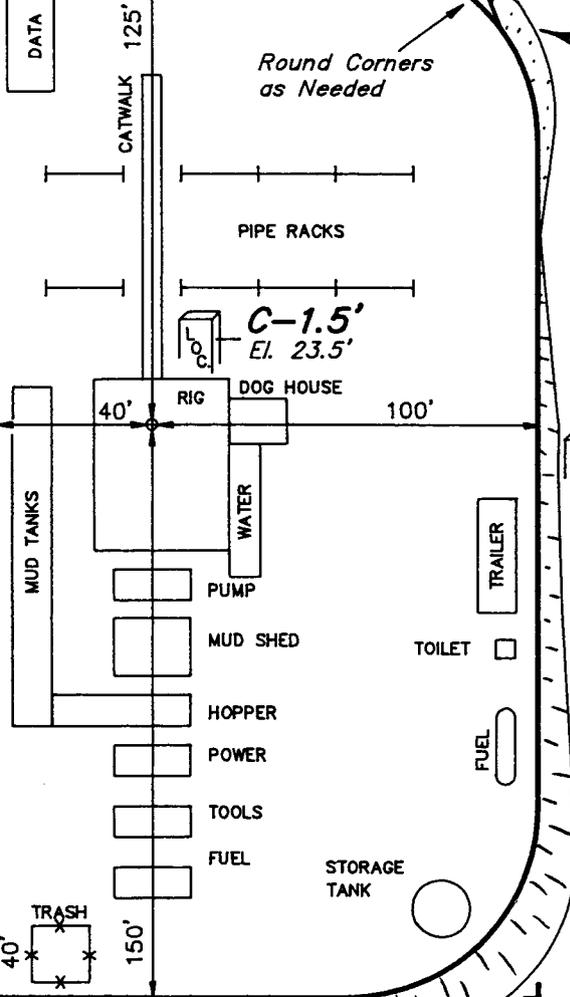

Sta. 1+50

**C-3.8'**  
El. 25.8'

Approx. Top of Cut Slope

Sta. 0+00

**C-5.6'**  
El. 27.6'

Topsoil Stockpile

**C-15.0'**  
El. 37.0'

Elev. Ungraded Ground at Location Stake = **6623.5'**


Elev. Graded Ground at Location Stake = **6622.2'**

PETROGLYPH OPERATING CO., INC.

TYPICAL CROSS SECTIONS FOR

UTE TRIBAL #1A-32  
SECTION 32, T5S, R3W, U.S.B.&M.  
759' FNL 502' FEL

1" = 20'  
X-Section Scale  
1" = 50'  
DATE: 10-16-95  
Drawn By: D.J.S.

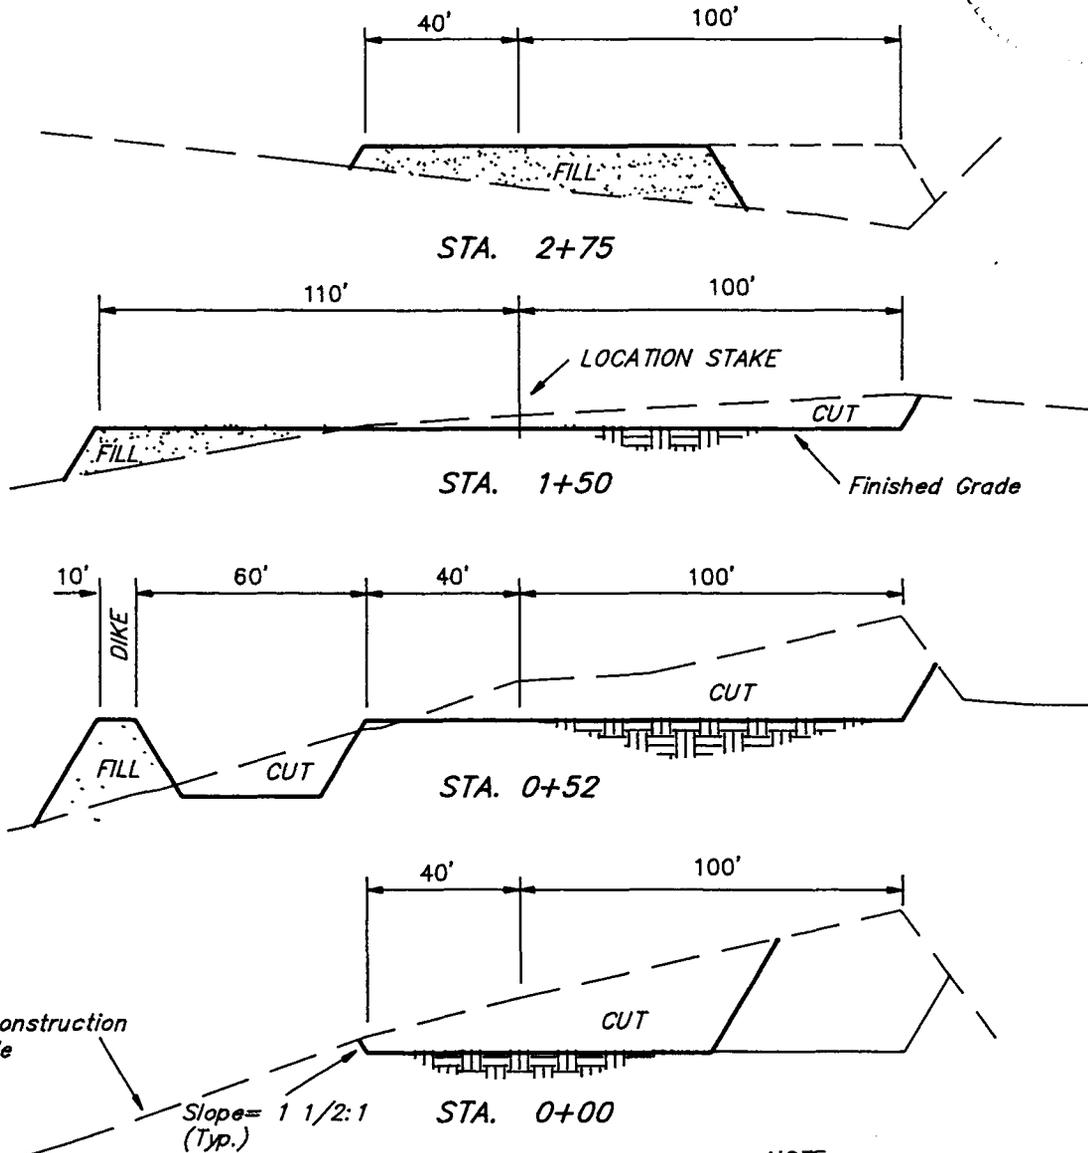


NOTE:  
Topsoil should not be Stripped Below Finished Grade on Substructure Area.

APPROXIMATE YARDAGES

(12") Topsoil Stripping	= 1,670 Cu. Yds.
Remaining Location	= 4,030 Cu. Yds.
<b>TOTAL CUT</b>	<b>= 5,700 CU.YDS.</b>
<b>FILL</b>	<b>= 3,160 CU.YDS.</b>

EXCESS MATERIAL AFTER 5% COMPACTION	= 2,370 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 2,370 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

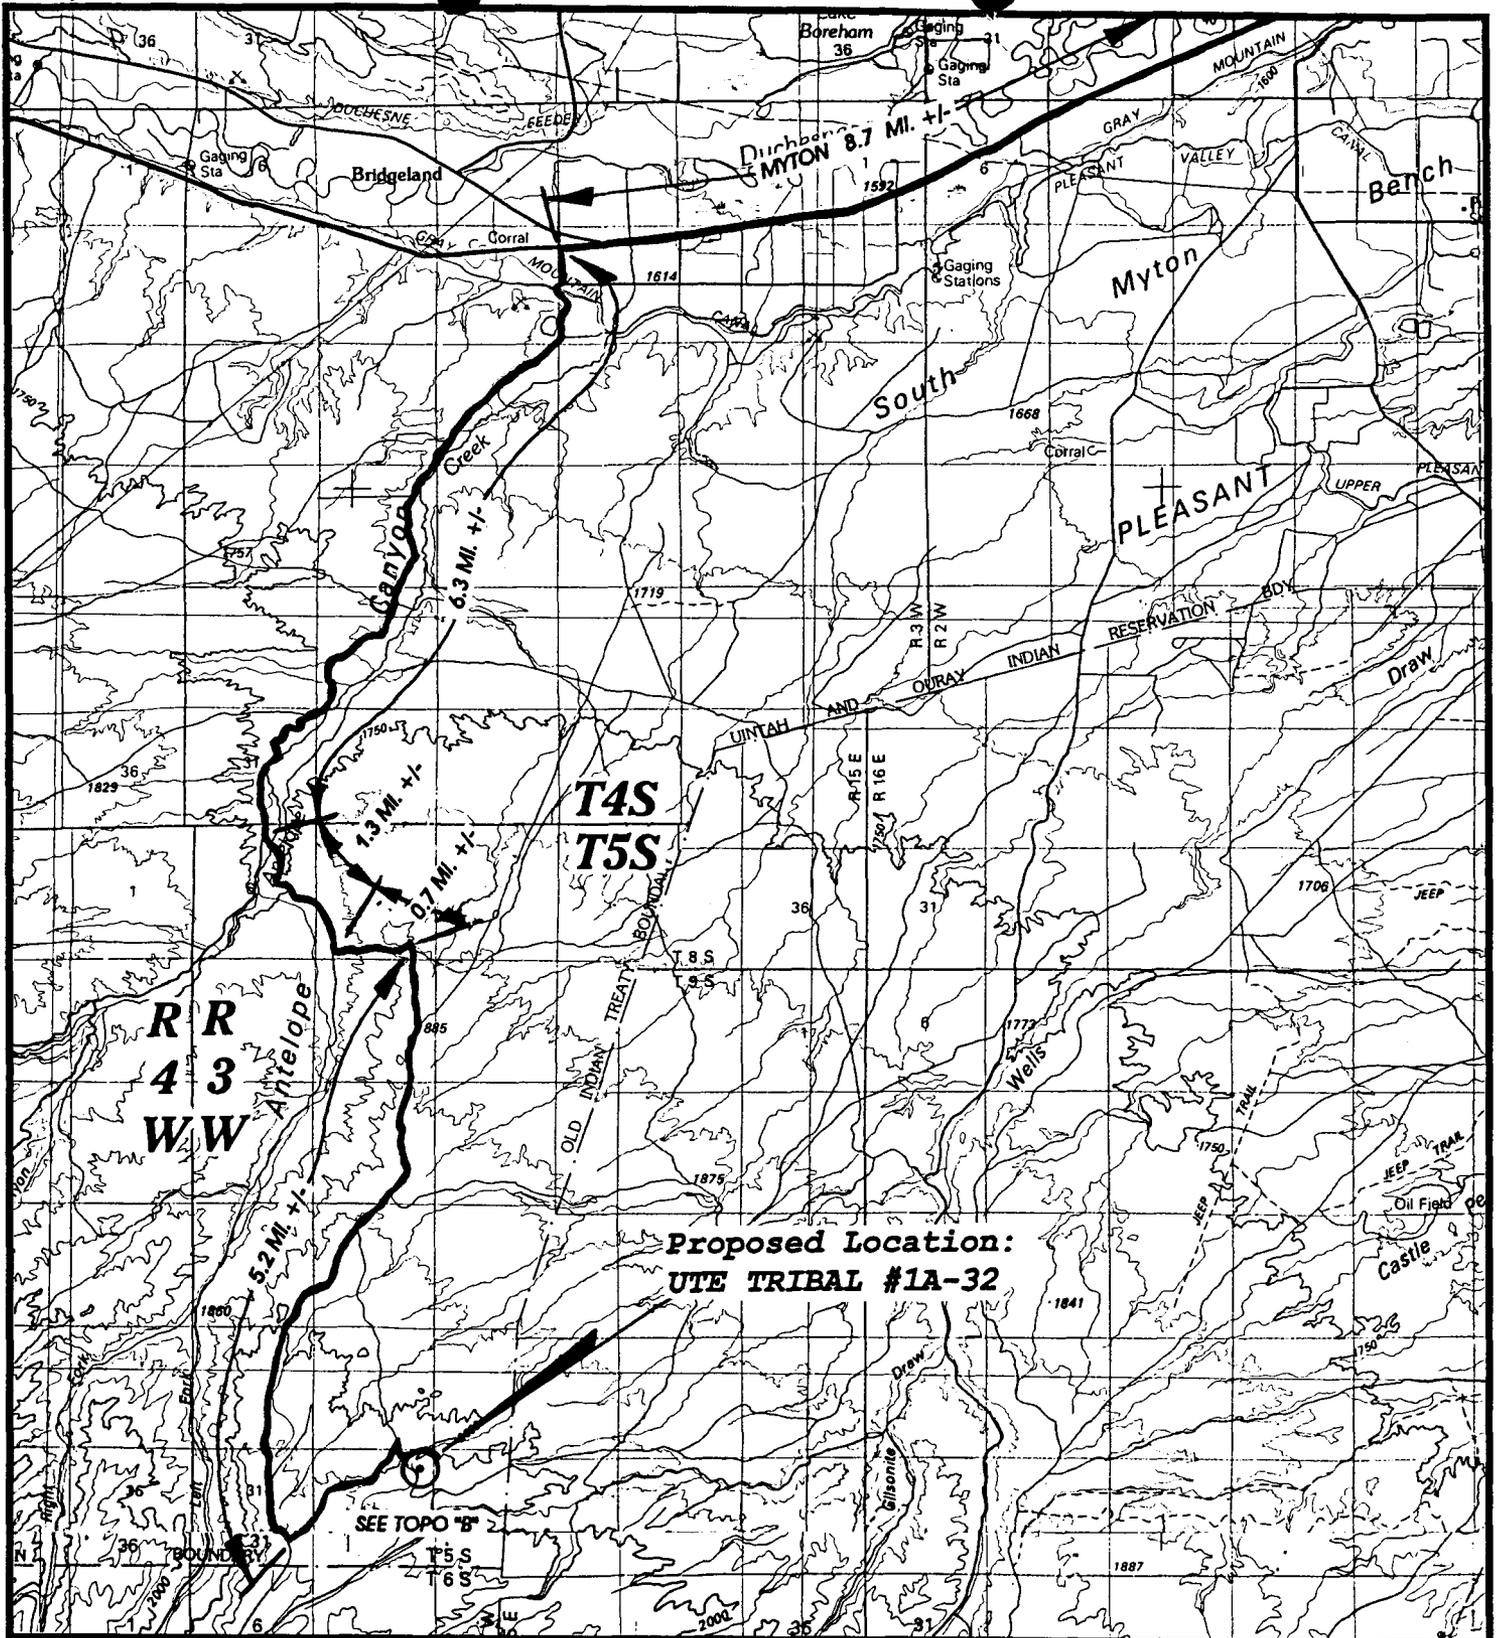

**UELS**


**TOPOGRAPHIC  
MAP "A"**

DATE: 10-17-95 D.COX

UINTAH ENGINEERING & LAND SURVEYING  
85 So. 200 East • Vernal, Utah 84078 • (801) 789-1017

**PETROGLYPH OPERATING CO., INC.**

UTE TRIBAL #1A-32  
SECTION 32, T5S, R3W, U.S.B.&M.  
759' FNL 502' FEL

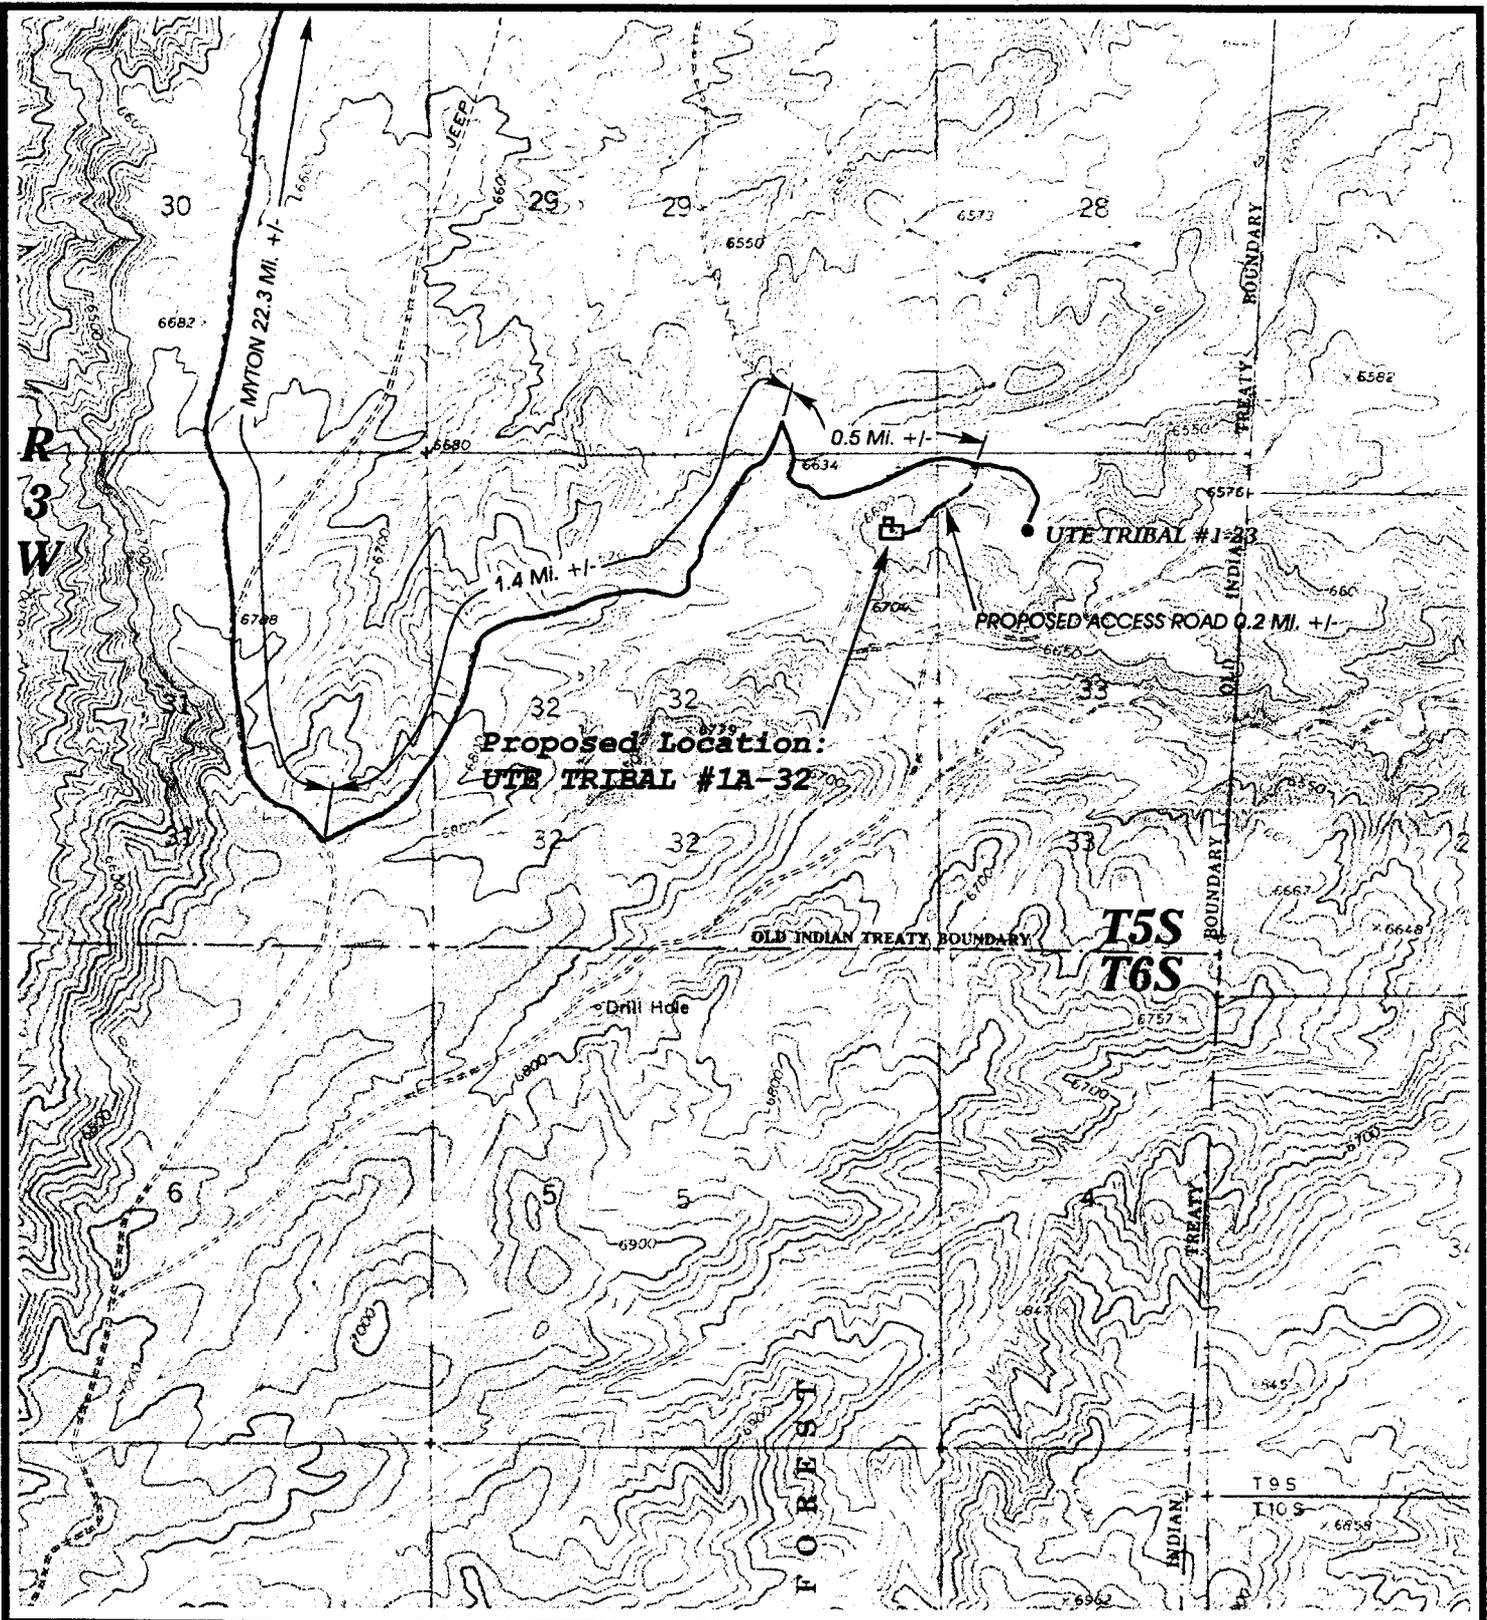

UELS

TOPOGRAPHIC  
MAP "B"

DATE: 10-17-95 D.COX


UTAH ENGINEERING & LAND SURVEYING  
85 So. 200 East • Vernal, Utah 84078 • (801) 789-1017



SCALE: 1" = 2000'

**PETROGLYPH OPERATING CO., INC.**

UTE TRIBAL #1A-32  
SECTION 32, T5S, R3W, U.S.B.&M.  
759' FNL 502' FEL

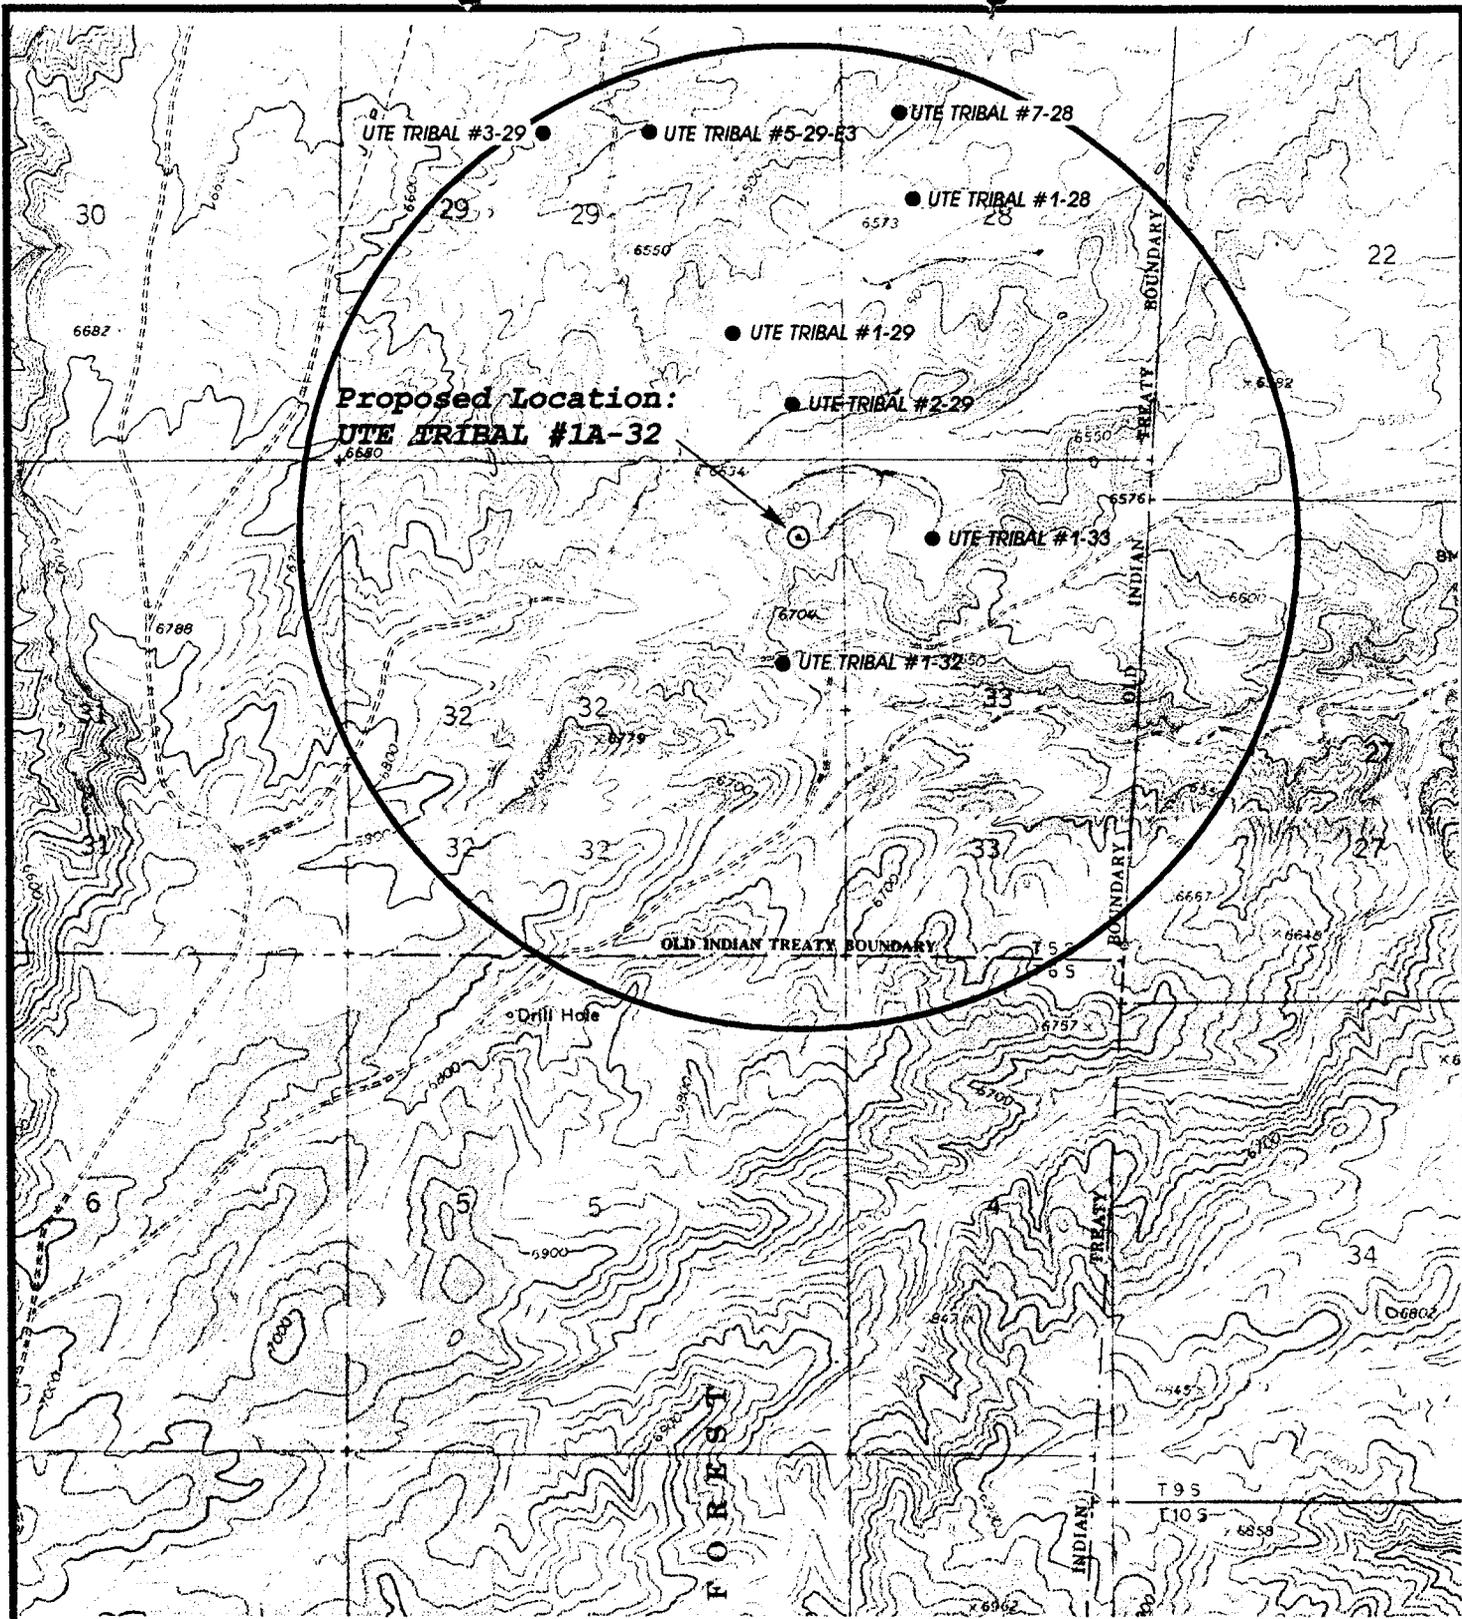

**LEGEND**

- Water Wells
- Abandoned Wells
- Temporarily Abandoned Wells
- Disposal Wells
- Drilling Wells
- Producing Wells
- Shut-in Wells

UINTAH ENGINEERING & LAND SURVEYING  
 85 So. 200 East • Vernal, Utah 84078 • (801) 789-1017



SCALE: 1" = 2000'

**PETROGLYPH OPERATING CO., INC.**

UTE TRIBAL #1A-32  
 SECTION 32, T5S, R3W, U.S.B.&M.  
 TOPOGRAPHIC  
 MAP "C"

DATE: 10-17-95 D.COX

WORKSHEET  
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 11/30/95

API NO. ASSIGNED: 43-013-31577

WELL NAME: UTE TRIBAL 1A-32  
 OPERATOR: PETROGLYPH OPERATING (N3800)

PROPOSED LOCATION:  
 NENE 32 - T05S - R03W  
 SURFACE: 0759-FNL-0502-FEL  
 BOTTOM: 0759-FNL-0582-FEL  
 DUCHESNE COUNTY  
 ANTELOPE CREEK FIELD (060)

INSPECT LOCATION BY: / /		
TECH REVIEW	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: IND  
 LEASE NUMBER: 14-20-H62-3521

PROPOSED PRODUCING FORMATION: GRRV

RECEIVED AND/OR REVIEWED:

Plat

Bond: Federal  State  Fee   
 (Number 604996)

Potash (Y/N)

Oil shale (Y/N)

Water permit  
 (Number 43-10152)

RDCC Review (Y/N)  
 (Date: \_\_\_\_\_)

LOCATION AND SITING:

\_\_\_ R649-2-3. Unit: \_\_\_\_\_

R649-3-2. General.

\_\_\_ R649-3-3. Exception.

\_\_\_ Drilling Unit.  
 Board Cause no: \_\_\_\_\_  
 Date: \_\_\_\_\_

COMMENTS: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

STIPULATIONS: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_


**Field: ANTELOPE CREEK FIELD**

**Formation: GREEN RIVER**

**County: DUCHESNE**

**Field No.: 060**

**State Spacing: R649-3-2 & R649-3-3**

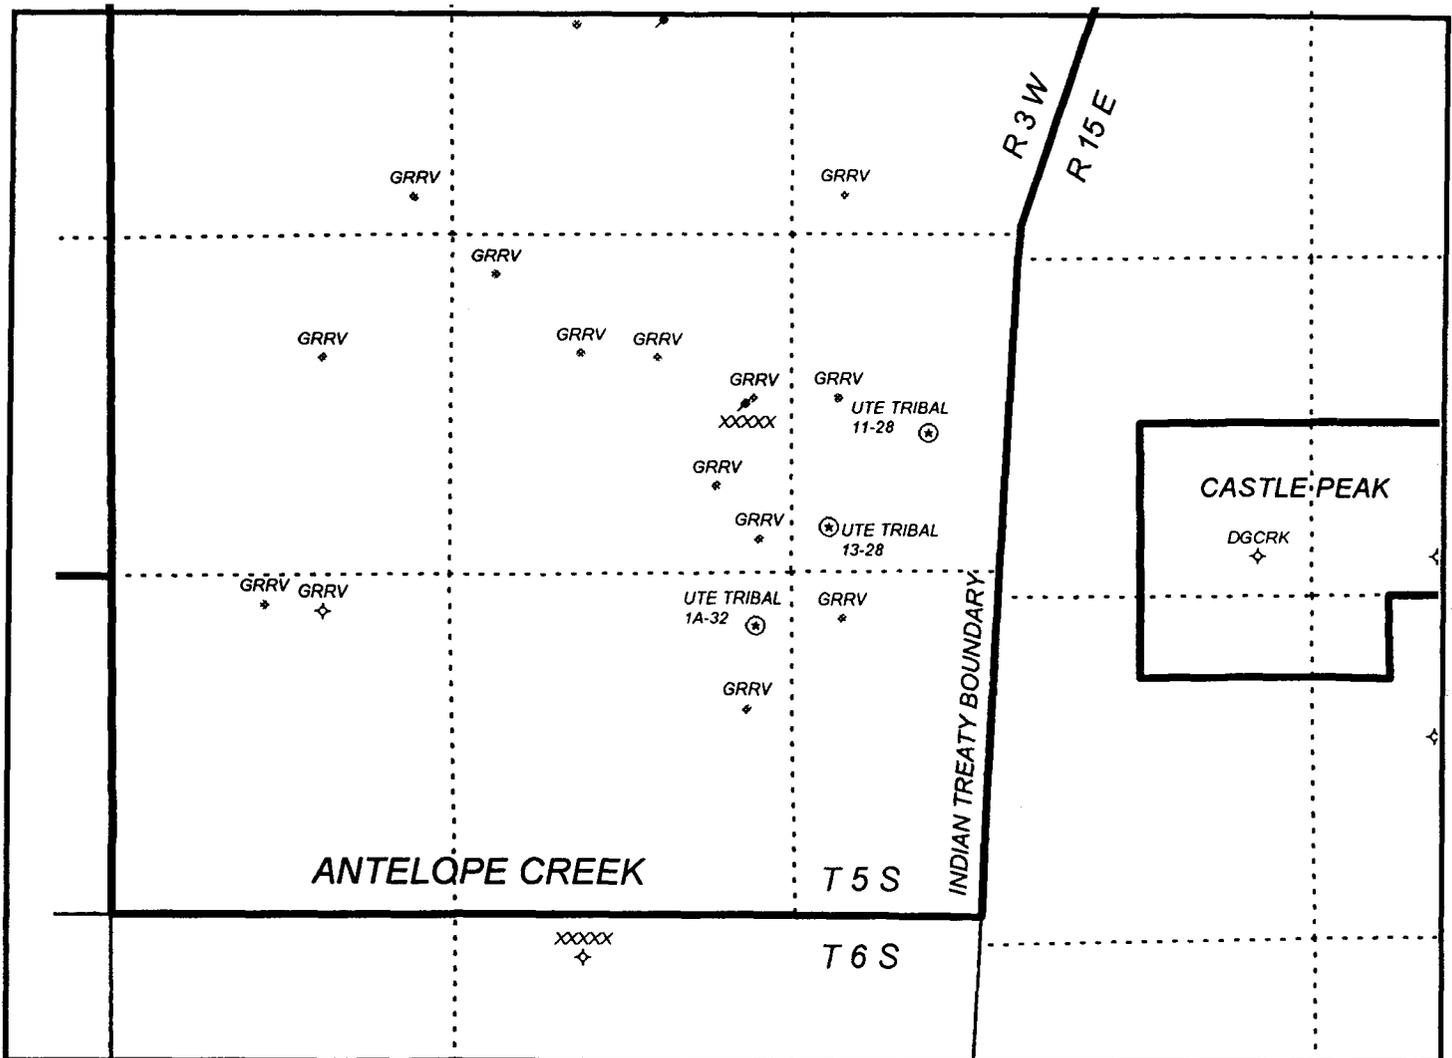

**STATE OF UTAH, DIV OF OIL, GAS & MINERALS**

<b>Operator: PETROGLYPH OPERATING C</b>	<b>Well Name: UTE TRIBAL 1A-32</b>
<b>Project ID: 43-013-31577</b>	<b>Location: SEC. 32 - T058 - R03W</b>

Design Parameters:

Mud weight ( 8.90 ppg) : 0.462 psi/ft  
 Shut in surface pressure : 2216 psi  
 Internal gradient (burst) : 0.065 psi/ft  
 Annular gradient (burst) : 0.000 psi/ft  
 Tensile load is determined using air weight  
 Service rating is "Sweet"

Design Factors:

Collapse : 1.125  
 Burst : 1.00  
 8 Round : 1.80 (J)  
 Buttress : 1.60 (J)  
 Other : 1.50 (J)  
 Body Yield : 1.50 (B)

Length (feet)	Size (in.)	Weight (lb/ft)	Grade	Joint	Depth (feet)	Drift (in.)	Cost
1	5,575	5.500	15.50	J-55	ST&C	5,575	4.825

	Collapse			Burst Load (psi)	Min Int Strgth (psi)	Yield S.F.	Tension		
	Load (psi)	Strgth (psi)	S.F.				Load (kips)	Strgth (kips)	S.F.
1	2578	4040	1.567	2578	4810	1.87	86.41	202	2.34 J

Prepared by : MATTHEWS, Salt Lake City, Utah  
 Date : 12-12-1995  
 Remarks :

Minimum segment length for the 5,575 foot well is 1,500 feet.  
 SICP is based on the ideal gas law, a gas gravity of 0.75, and a mean gas temperature of 115°F (Surface 74°F , BHT 152°F & temp. gradient 1.400°/100 ft.)  
 String type: Production  
 The mud gradient and bottom hole pressures (for burst) are 0.462 psi/ft and 2,578 psi, respectively.

**NOTE:** The design factors used in this casing string design are as shown above. As a general guideline, Lone Star Steel recommends using minimum design factors of 1.125 - collapse (with evacuated casing), 1.0 - (uniaxial) burst, 1.8 - API 8rd tension, 1.6 - buttress tension, 1.5 - body yield tension, and 1.6 - EUE 8rd tension. Collapse strength under axial tension was calculated based on the Westcott, Dunlop and Kemler curve. Engineering responsibility for use of this design will be that of the purchaser. Costs for this design are based on a 1987 pricing model. (Version 1.07)



State of Utah  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt  
Governor  
Ted Stewart  
Executive Director  
James W. Carter  
Division Director

355 West North Temple  
3 Triad Center, Suite 350  
Salt Lake City, Utah 84180-1203  
801-538-5340  
801-359-3940 (Fax)  
801-538-5319 (TDD)

December 12, 1995

Petroglyph Operating Company  
P.O. Box 607  
Roosevelt, Utah 84066

Re: Ute Tribal #1A-32 Well, 759' FNL, 502' FEL, NE NE, Sec. 32, T. 5 S., R. 3 W.,  
Duchesne County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. 40-6-1 et seq., Utah Administrative Code R649-3-1 et seq., and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-013-31577.

Sincerely,

A handwritten signature in black ink, appearing to read "R. J. Firth".

R. J. Firth  
Associate Director

lwp

Enclosures

cc: Duchesne County Assessor  
Bureau of Land Management, Vernal District Office  
WAPD



Operator: Petroglyph Operating Company, Inc.  
Well Name & Number: Ute Tribal #1A-32  
API Number: 43-013-31577  
Lease: 14-20-H62-3521  
Location: NE NE Sec. 32 T. 5 S. R. 3 W.

### Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for Permit to Drill.

2. Notification Requirements

Notify the Division within 24 hours following spudding the well or commencing drilling operations. Contact Jimmie Thompson at (801)538-5340.

Notify the Division prior to commencing operations to plug and abandon the well. Contact Frank Matthews or Mike Hebertson at (801)538-5340.

3. Reporting Requirements

All required reports, forms and submittals shall be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Company: PETROGLYPH OPERATING

Well Name: UTE TRIBAL 1A-32

Api No. 43-013-31577

Section 32 Township 5S Range 3W County DUCHESNE

Drilling Contractor UNION

Rig # 16

SPUDDED: Date 1/16/96

Time

How ROTARY

Drilling will commence

Reported by D. INGRAM-DOGM

Telephone #

Date: 1/17/96 Signed: FRM

2

STATE OF UTAH  
DIVISION OF OIL, GAS AND MINING  
DRILLING INSPECTION FORM

OPERATOR: PETROGLYPH OPERATING COMPANY REP: DAN LINDSEY

WELL NAME: UTE TRIBAL #1A-32 API NO 43-013-31577

QTR/QTR: NE/NE SECTION: 32 TWP: 05S RANGE: 03W

CONTRACTOR: UNION DRILLING COMPANY RIG NUMBER: #16

INSPECTOR: DENNIS INGRAM TIME: 2:10 PM DATE: 1/23/96

SPUD DATE: DRY: 1/16/96 ROTARY: 1/23/96 PROJECTED T.D.: \_\_\_\_\_

OPERATIONS AT TIME OF VISIT: DRILING AHEAD WITH 1.6% KCL WATER,  
60 PPM CHLORIDES, AT 5925'.

WELL SIGN: Y MUD WEIGHT 8.3+ LBS/GAL ROPE: Y

BLODIE LINE: Y FLARE PIT: N H2S POTENTIAL: NO

ENVIRONMENTAL:

RESERVE PIT: Y FENCED: Y LINED: Y PLASTIC: Y

RUBBER: \_\_\_\_\_ BENTONITE: \_\_\_\_\_ SANITATION: (2)

ROPE TEST RECORDED IN THE RIG DAILY TOUR BOOK: YES

REMARKS:

LAST SURVEY WAS 2 1/2 DEGREES AT 5500'. APD IN DOGHOUSE. BIT  
#4 IN HOLE AND MUD MOTE DRILLING 38 FEET PER HOUR WITH 114  
UNITS BACKGROUND GAS.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK  
 DRILL  DEEPEN

b. TYPE OF WELL  
 OIL WELL  GAS WELL  OTHER  SINGLE ZONE  MULTIPLE ZONE

2. NAME OF OPERATOR  
 PETROGLYPH OPERATING CO., INC.

3. ADDRESS AND TELEPHONE NO.  
 P.O. BOX 607 ROOSEVELT, UT 84066

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\*)  
 At surface: 759' FNL & 502' FEL NE/4 NE/4  
 At proposed prod. zone

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE\*  
 24.4 miles southwest of Myton, UT

15. DISTANCE FROM PROPOSED\* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drilg. unit line, if any)  
 502'

16. NO. OF ACRES IN LEASE  
 640

17. NO. OF ACRES ASSIGNED TO THIS WELL  
 40

18. DISTANCE FROM PROPOSED LOCATION\* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT.  
 5575'

19. PROPOSED DEPTH  
 5575'

20. ROTARY OR CABLE TOOLS  
 Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)  
 6622.2' Graded Ground

22. APPROX. DATE WORK WILL START\*  
 November, 1995

5. LEASE DESIGNATION AND SERIAL NO.  
 14-20-H62-3521

6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
 UINTAH & OURAY TRIBE

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME WELL NO.  
 UTE TRIBAL

9. AP WELL NO.  
 #1A-32

10. FIELD AND POOL, OR WILDCAT  
 ANTELOPE CREEK

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
 Sec. 32, T5S, R3W

12. COUNTY OR PARISH  
 Duchesne

13. STATE  
 Utah

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4	8 5/8	24.0#	250'	135 sx class "G" + 2% CaCl <sub>2</sub>
7 7/8	5 1/2	15.5#	5575'	+ 1/4 #/sx celloflake. 50/50 POZMIX + 2% GEL + 10% SALT TO 400' ABOVE ALL ZONES OF INTEREST (+ 10% EXCESS) LIGHT CEMENT (11 PPG±) + LCM TO 200' ABOVE OIL SHALE OR FRESH WATER INTERVALS (+ 5% EXCESS)

pc: Utah Division of Oil, Gas & Mining  
Bureau of Indian Affairs, Fort Duchesne, UT  
Uintah & Ouray Tribe, Fort Duchesne, UT

PETROGLYPH OPERATING COMPANY INC. WILL BE THE DESIGNATED OPERATOR OF THE SUBJECT WELL UNDER BOND #BQ4556.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED [Signature] TITLE Agent for Petroglyph DATE 11-27-1995

(This space for Federal or State office use)  
PERMIT NO. NOTICE OF APPROVAL APPROVAL DATE \_\_\_\_\_

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY [Signature] TITLE ASSISTANT DISTRICT MANAGER MINERALS DATE DEC 13 1995

\*See Instructions On Reverse Side

CONDITIONS OF APPROVAL ATTACHED

DOG M

1-7-86-6 M 19

CONDITIONS OF APPROVAL  
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Petroglyph Operating Co., Inc.

Well Name & Number: Ute Tribal 1A-32

API Number: 43-013-31577

Lease Number: 14-20-H62-3521

Location: NENE Sec. 32 T. 5S R. 3W

**NOTIFICATION REQUIREMENTS**

- Location Construction - at least forty-eight (48) hours prior to construction of location and access roads.
- Location Completion - prior to moving on the drilling rig.
- Spud Notice - at least twenty-four (24) hours prior to spudding the well.
- Casing String and Cementing - at least twenty-four (24) hours prior to running casing and cementing all casing strings.
- BOP and Related Equipment Tests - at least twenty-four (24) hours prior to initiating pressure tests.
- First Production Notice - within five (5) business days after new well begins, or production resumes after well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

## CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas Orders, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

### A. DRILLING PROGRAM

#### 1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to Tim Ingwell of this office. Copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

#### 2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a 2M system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

If an air compressor is on location and is being utilized to provide air for the drilling medium while drilling, the special drilling requirements in Onshore Oil and Gas Order No. 2, regarding air or gas drilling shall be adhered to. If a mist system is being utilized then the requirement for a deduster shall be waived.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint.

As a minimum, the usable water and oil shale resources shall be isolated and/or protected by having a cement top for the production casing at least 200 ft. above the Base of the Moderately Saline Water zone identified at  $\pm 1,737$  ft. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the AO. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vaporproof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the AO.

A cement bond log (CBL) will be run from the production casing shoe to  $\pm 1,537$  ft. and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

The Vernal District Office shall be notified, during regular work hours (7:45 a.m.-4:30 p.m., Monday through Friday except holidays), at least 24 hours prior to spudding the well.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communication, not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5 (b.9. d.), and shall be submitted to the appropriate District Office within sixty (60) days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (b. 4).

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries. Tests for meter accuracy will be conducted following initial installation and at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approval or notification is necessary, please contact one of the following individuals:

Wayne Bankert           (801) 789-4170  
Petroleum Engineer

Ed Forsman             (801) 789-7077  
Petroleum Engineer

BLM FAX Machine       (801) 781-4410

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

- Unused fracturing fluids or acids
- Gas plant cooling tower cleaning wastes
- Painting wastes
- Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spend solvents, spilled chemicals, and waste acids
- Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste
- Refinery wastes
- Liquid and solid wastes generated by crude oil and tank bottom reclaimers
- Used equipment lubrication oils
- Waste compressor oil, filters, and blowdown
- Used hydraulic fluids
- Waste solvents
- Waste in transportation pipeline-related pits
- Caustic or acid cleaners
- Boiler cleaning wastes
- Boiler refractory bricks
- Incinerator ash
- Laboratory wastes
- Sanitary wastes
- Pesticide wastes
- Radioactive tracer wastes
- Drums, insulation and miscellaneous solids.

**SURFACE USE PLAN OF OPERATION**  
Conditions of Approval (COA's)

1. All vehicular traffic, personnel movement, construction and restoration operations should be confined to the areas examined, as referenced in report, and to the existing roadways and/or evaluated access routes.
2. All recommendations of the Bureau of Indian Affairs, combined site specific Environmental Analysis (EA) report shall be strictly adhered, during and after construction.
3. All personnel should refrain from collecting artifacts and from disturbing any significant cultural or paleontological resources in the area.
4. The personnel from the Ute Tribe Energy & Minerals Department should be consulted, should cultural remains from subsurface deposits be exposed during construction work.

**Mitigation stipulations from the combined site specific Environmental Analysis.**

1. Before the site is abandoned the company will be required to restore the well pad and access road to near their original state. The disturbed area will be reseeded with desirable perennial vegetation.

Although the road rights-of-way will be 30 feet wide, the graded area of the road will be limited in most places to 21 feet between the top of the cut and toe of the fill. Where deep cuts are required for road construction, or where intersections or sharp curves occur the road may be constructed wider than 21 feet so that large pieces of equipment will have enough room to make turns.

2. Noxious weeds will be controlled on all well sites and rights-of-way. If noxious weeds spread from the well sites or rights-of-way onto adjoining land, the company will also be responsible for their control.
3. The reserve pit will be lined with an impervious synthetic liner.
4. The synthetic liner will be bedded with fine textured earthen material which is free of rocks. Straw may be used in addition to the earthen material, but not in lieu of it.

5. The operator will have a closed production system. All produced waters and by products will either be piped to approved injection wells, or hauled to approved disposal sites.
6. Production water, oil, and other by-products will not be applied to roads or well pads for the control of dust or weeds. Indiscriminate dumping of oil field by-products on tribal lands will not be allowed.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

**SUBMIT IN TRIPLICATE**

1. Type of Well

Oil Well  Gas Well  Other

2. Name of Operator

**Petroglyph Operating Company, Inc.**

3. Address and Telephone No.

**6209 N. Highway 61 Hutchinson, KS 67502 (316) 665-8500**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

**NENE 759 FNL & 502 FEL  
32-5S-3W**

5. Lease Designation and Serial No.

**14-20-H62-3521**

6. If Indian, Allottee or Tribe Name

**Ute Indian Tribe**

7. If Unit or CA, Agreement Designation

**14-20-H62-4650**

8. Well Name and No.

**Ute Tribal 1A-32**

9. API Well No.

**43-013-31577**

10. Field and Pool, or Exploratory Area

**Antelope Creek**

11. County or Parish, State

**Duchesne County, UT**

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- Notice of Intent  
 Subsequent Report  
 Final Abandonment Notice

TYPE OF ACTION

- Abandonment  
 Recompletion  
 Plugging Back  
 Casing Repair  
 Altering Casing  
 Other well name change
- Change of Plans  
 New Construction  
 Non-Routine Fracturing  
 Water Shut-Off  
 Conversion to Injection  
 Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

In an effort to bring all of the existing wells and the anticipated wells to be drilled into a uniform numbering system, based on 40 acre locations, each well name will be changed to consist of its section location followed by the correct number of its well spot, based upon 16 wells per section.

Petroglyph Operating Company, Inc. would like to notify by subsequent report that the above referenced well name has been changed to Ute Tribal 32-01. This will be effective January 1, 1996.

14. I hereby certify that the foregoing is true and correct

Signed [Signature] Title President Date 1/25/96

(This space for Federal or State office use)

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_  
Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*See Instruction on Reverse Side

January 26, 1996

Ron Firth  
State of Utah  
Division of Oil, Gas & Mining  
3 Triad Center, Suite 350  
355 West North Temple  
Salt Lake City, UT 84180-1203

**RE: Well Name Change for Wells in the Antelope Creek Field, Duchesne County, UT**

Mr. Firth:

In an effort to bring all of the existing wells and wells to be drilled into a uniform numbering system, based on 40 acre locations and 16 wells per section, each well name will be changed to consist of its section location followed by the correct number of its well spot.

Enclosed please find sundry notices changing the well name for all wells located in Antelope Creek. We are making this change effective January 1, 1996. Also enclosed for your convenience is a list consisting of the "old" well names and the "new" well names.

Your assistance during this time of transition is greatly appreciated. If you have any questions regarding the enclosed information, please do not hesitate to contact me at (316) 665-8500.

Sincerely,



Angela R. Ely  
Administrative Operations Manager

ARE/ms

Enclosures

pc: Dennis Ingram  
Lisha Cordova

## 96WELLÇ.XLS

AgrmtNbt	LeaseNbr	LeaseName	Old	New	API	Footage	Field	Town	Range	Sec	Qtr
14-20-H62-4650	14-20-H62-3509	Ute Tribal	1-10	10-12	43-013-30805	2001 FSL & 600 FWL	Antelope Creek	5S	3W	10	NWSW
14-20-H62-4660	14-20-H62-3510	Ute Tribal	1-15	15-04	43-013-30880	907 FNL & 615 FWL	Antelope Creek	5S	3W	15	NWNW
14-20-H62-4650	14-20-H62-3511	Ute Tribal	1-16	16-16	43-013-30804	505 FSL & 600 FEL	Antelope Creek	5S	3W	16	SESE
14-20-H62-4660	14-20-H62-4633	Ute Tribal	1-17	17-01	43-013-30790	638 FNL & 610 FEL	Antelope Creek	5S	3W	17	NENE
14-20-H62-4650	14-20-H62-3513	Ute Tribal	1-18	18-01	43-013-30761	550 FNL & 521 FEL	Antelope Creek	5S	3W	18	NENE
14-20-H62-4650	14-20-H62-3514	Ute Tribal	1-19	19-16	43-013-30803	656 FSL & 603 FEL	Antelope Creek	5S	3W	19	SESE
14-20-H62-4660	14-20-H62-3515	Ute Tribal	1-20	20-02	43-013-30764	404 FNL & 1539 FEL	Antelope Creek	5S	3W	20	NWNW
14-20-H62-4650	14-20-H62-3516	Ute Tribal	1-21	21-13	43-013-30883	611 FSL & 786 FWL	Antelope Creek	5S	3W	21	SWSW
14-20-H62-4660	14-20-H62-3517	Ute Tribal	1-28	28-05	43-013-30802	2583 FNL & 712 FWL	Antelope Creek	5S	3W	28	SWNW
14-20-H62-4660	14-20-H62-3518	Ute Tribal	1-29 inj	29-09 inj	43-013-30763	1324 FSL & 1160 FEL	Antelope Creek	5S	3W	29	NESE
14-20-H62-4660	14-20-H62-3502	Ute Tribal	1-3	03-13	43-013-30823	659 FSL & 659 FWL	Antelope Creek	5S	3W	3	SWSW
14-20-H62-4660	14-20-H62-3519	Ute Tribal	1-30	30-07	43-013-30852	1980 FNL & 1980 FEL	Antelope Creek	5S	3W	30	SWNE
14-20-H62-4660	14-20-H62-3520	Ute Tribal	1-31	31-02	43-013-30827	519 FNL & 1942 FEL	Antelope Creek	5S	3W	31	NWNE
14-20-H62-4660	14-20-H62-3521	Ute Tribal	1-32	32-08	43-013-30853	2100 FNL & 660 FEL	Antelope Creek	5S	3W	32	SENE
14-20-H62-4660	14-20-H62-3522	Ute Tribal	1-33	33-04	43-013-30806	723 FNL & 802 FWL	Antelope Creek	5S	3W	33	NWNW
14-20-H62-4660	14-20-H62-3503	Ute Tribal	1-4	04-01	43-013-30762	1331 FNL & 1277 FEL	Antelope Creek	5S	3W	4	NENE
14-20-H62-4660	14-20-H62-3504	Ute Tribal	1-5	05-07	43-013-30785	2430 FNL & 1777 FEL	Antelope Creek	5S	3W	5	SWNE
14-20-H62-4660	14-20-H62-3505	Ute Tribal	1-6	06-16	43-013-30793	833 FSL & 902 FEL	Antelope Creek	5S	3W	6	SESE
14-20-H62-4660	14-20-H62-3506	Ute Tribal	1-7	07-14	43-013-30788	559 FSL & 1957 FWL	Antelope Creek	5S	3W	7	SESW
14-20-H62-4660	14-20-H62-3507	Ute Tribal	1-8 inj	08-04 inj	43-013-30759	754 FNL & 888 FWL	Antelope Creek	5S	3W	8	NWNW
14-20-H62-4660	14-20-H62-3504	Ute Tribal	11-5	05-09	43-013-31468	2150 FSL & 639 FEL	Antelope Creek	5S	3W	5	NESE
14-20-H62-4660	14-20-H62-3517	Ute Tribal	12-28	28-12	43-013-31529	1861 FSL & 496 FWL	Antelope Creek	6S	3W	28	NWSW
14-20-H62-4660	14-20-H62-3503	Ute Tribal	12-4	04-12	43-013-31470	2000 FSL & 600 FWL	Antelope Creek	5S	3W	4	NWSW
14-20-H62-4660	14-20-H62-3504	Ute Tribal	12-5	05-11	43-013-31454	1856 FSL & 1457 FWL	Antelope Creek	5S	3W	5	NESW
14-20-H62-4660	14-20-H62-3507	Ute Tribal	13-8	08-13	43-013-31468	660 FSL & 660 FWL	Antelope Creek	5S	3W	8	SWSW
14-20-H62-4660	14-20-H62-3518	Ute Tribal	14-29	29-10	43-013-31475	1955 FSL & 2125 FEL	Antelope Creek	5S	3W	29	NWSE
14-20-H62-4660	14-20-H62-3504	Ute Tribal	14-5	05-14	43-013-31455	590 FSL & 1984 FWL	Antelope Creek	5S	3W	5	SESW
14-20-H62-4660	14-20-H62-3518	Ute Tribal	15-29	29-15	43-013-31530	649 FSL & 1831 FEL	Antelope Creek	5S	3W	29	SWSE
14-20-H62-4660	14-20-H62-3504	Ute Tribal	15-5	05-15	43-013-31461	990 FSL & 1900 FEL	Antelope Creek	5S	3W	5	SWSE
14-20-H62-4660	14-20-H62-3504	Ute Tribal	16-5	05-16	43-013-31527	708 FSL & 523 FEL	Antelope Creek	5S	3W	5	SESE
14-20-H62-4660	14-20-H62-3506	Ute Tribal	16-7	07-16	43-013-31463	440 FSL & 410 FEL	Antelope Creek	5S	3W	7	SESE
14-20-H62-4660	14-20-H62-3507	Ute Tribal	1A-8	08-01	43-013-31568	660 FSL & 660 FEL	Antelope Creek	5S	3W	8	NENE
14-20-H62-4660	14-20-H62-3509	Ute Tribal	2-10	10-03	43-013-31187	600 FNL & 1650 FWL	Antelope Creek	5S	3W	10	NENW
14-20-H62-4660	14-20-H62-3511	Ute Tribal	2-16	16-13	43-013-31166	750 FSL & 500 FWL	Antelope Creek	5S	3W	16	SWSW
14-20-H62-4660	14-20-H62-3513	Ute Tribal	2-18	18-08	43-013-30881	1929 FNL & 612 FEL	Antelope Creek	5S	3W	18	SENE
14-20-H62-4660	14-20-H62-3515	Ute Tribal	2-20	20-07	43-013-30882	1980 FNL & 1980 FEL	Antelope Creek	5S	3W	20	SWNE
14-20-H62-4660	14-20-H62-3518	Ute Tribal	2-29	29-16	43-013-30849	500 FSL & 500 FEL	Antelope Creek	5S	3W	29	SESE
14-20-H62-4660	14-20-H62-3502	Ute Tribal	2-3	03-14	43-013-31097	1050 FSL & 1980 FWL	Antelope Creek	5S	3W	3	SESW
14-20-H62-4660	14-20-H62-3520	Ute Tribal	2-31	31-03	43-013-31188	442 FNL & 2338 FWL	Antelope Creek	5S	3W	31	NENW
14-20-H62-4660	14-20-H62-3503	Ute Tribal	2-4 inj	04-07 inj	43-013-30879	2551 FNL & 1900 FEL	Antelope Creek	5S	3W	4	SWNE
14-20-H62-4660	14-20-H62-3504	Ute Tribal	2-5	05-13	43-013-30824	723 FSL & 588 FWL	Antelope Creek	5S	3W	5	SWSW
14-20-H62-4660		State	2-6	06-10	43-013-30891	2525 FSL & 1836 FEL	Antelope Creek	5S	3W	6	NW SE
14-20-H62-4660	14-20-H62-3506	Ute Tribal	2-7	07-01	43-013-30825	567 FNL & 706 FEL	Antelope Creek	5S	3W	7	NENE
14-20-H62-4660	14-20-H62-3507	Ute Tribal	2-8	08-05	43-013-30826	1980 FNL & 500 FWL	Antelope Creek	5S	3W	8	SWNW
14-20-H62-4660	14-20-H62-3508	Ute Tribal	2-9	09-01	430-13-30789	770 FNL & 1059 FEL	Antelope Creek	5S	3W	9	NENE
14-20-H62-4660	14-20-H62-3507	Ute Tribal	2A-8	08-02	43-013-31569	506 FNL & 1956 FEL	Antelope Creek	5S	3W	8	NWNE
14-20-H62-4660	14-20-H62-3513	Ute Tribal	3-18	18-03	43-013-31528	614 FNL & 1983 FWL	Antelope Creek	5S	3W	18	NENW

## 96WELLÇ.XLS

AgmtNbr	LeaseNbr	LeaseName	Old	New	API	Footage	Field	Town	Range	Sec	Qtr
14-20-H62-4650	14-20-H62-3515	Ute Tribal	3-20	<del>20-06</del>	43-013-31175	2050 FNL & 1950 FWL	Antelope Creek	5S	3W	20	SENW
14-20-H62-4650	14-20-H62-3518	Ute Tribal	3-29	<del>29-06</del>	43-013-30850	1900 FNL & 1980 FWL	Antelope Creek	5S	3W	29	SENW
14-20-H62-4650	14-20-H62-3503	Ute Tribal	3-4	<del>04-11</del>	43-013-30878	1999 FSL & 1738 FWL	Antelope Creek	5S	3W	4	NESW
14-20-H62-4650	14-20-H62-3504	Ute Tribal	3-5 E3 inj	<del>05-10 inj</del>	43-013-30938	2068 FSL & 2093 FEL	Antelope Creek	5S	3W	5	NWSE
14-20-H62-4650	14-20-H62-3505	Ute Tribal	3-6	<del>06-08</del>	43-013-31189	2323 FNL & 691 FEL Lot # 9	Antelope Creek	5S	3W	6	SENE
14-20-H62-4650	14-20-H62-3506	Ute Tribal	3-7	<del>07-08</del>	43-013-30828	1864 FNL & 972 FEL	Antelope Creek	5S	3W	7	SENE
14-20-H62-4650	14-20-H62-3507	Ute Tribal	3-8	<del>08-03</del>	43-013-31101	505 FNL & 439 FWL	Antelope Creek	5S	3W	8	NENW
14-20-H62-4650	14-20-H62-4633	Ute Tribal	4-17	<del>17-04</del>	43-013-31464	697 FNL & 636 FWL	Antelope Creek	5S	3W	17	NWNW
14-20-H62-4650	14-20-H62-3513	Ute Tribal	4-18 inj	<del>18-02 inj</del>	43-013-31099	812 FNL & 1768 FEL	Antelope Creek	5S	3W	18	NWNE
14-20-H62-4650	14-20-H62-3518	Ute Tribal	4-29	<del>29-04</del>	43-013-30851	660 FNL & 660 FWL	Antelope Creek	5S	3W	29	NWNW
14-20-H62-4650	14-20-H62-3503	Ute Tribal	4-4	<del>04-13</del>	43-013-30848	807 FSL & 886 FWL	Antelope Creek	5S	3W	4	SWSW
14-20-H62-4650	14-20-H62-3504	Ute Tribal	4-5	<del>05-08</del>	43-013-31306	2500 FNL & 550 FEL	Antelope Creek	5S	3W	5	SENE
14-20-H62-4650	14-20-H62-3507	Ute Tribal	4-8	<del>08-12</del>	43-013-31164	2100 FSL & 515 FWL	Antelope Creek	5S	3W	8	NWSW
14-20-H62-4650	14-20-H62-3508	Ute Tribal	4-9	<del>09-15</del>	43-013-31165	550 FSL & 2000 FEL	Antelope Creek	5S	3W	9	SWSE
14-20-H62-4650	14-20-H62-3503	Ute Tribal	4A-4	<del>04-04</del>	43-013-31574	1205 FNL & 660 FWL Lot # 5	Antelope Creek	5S	3W	4	NWNW
14-20-H62-4650	14-20-H62-3513	Ute Tribal	5-18 inj	<del>18-09 inj</del>	43-013-31180	2151 FSL & 667 FEL	Antelope Creek	5S	3W	18	NESE
14-20-H62-4650	14-20-H62-3518	Ute Tribal	5-29 E3	<del>29-07</del>	43-013-30939	1969 FNL & 2093 FEL	Antelope Creek	5S	3W	29	SWNE
14-20-H62-4650	14-20-H62-3503	Ute Tribal	5-4	<del>04-05</del>	43-013-31462	1969 FNL & 660 FWL Lot # 12	Antelope Creek	5S	3W	4	SWNW
14-20-H62-4650	14-20-H62-3507	Ute Tribal	5-8 inj	<del>08-06 inj</del>	43-013-31307	1550 FNL & 1550 FWL	Antelope Creek	5S	3W	8	SENW
14-20-H62-4650	14-20-H62-3518	Ute Tribal	6-29	<del>29-08A</del>	43-013-31305	2600 FNL & 600 FEL	Antelope Creek	5S	3W	29	SENE
14-20-H62-4650	14-20-H62-3503	Ute Tribal	6-4	<del>04-14</del>	43-013-31100	660 FSL & 2000 FWL	Antelope Creek	5S	3W	4	SESW
14-20-H62-4650	14-20-H62-3503	Ute Tribal	6A-4	<del>04-06</del>	43-013-31526	2427 FNL & 2028 FWL Lot # 11	Antelope Creek	5S	3W	4	SENW
14-20-H62-4650	14-20-H62-3513	Ute Tribal	7-18	<del>18-07</del>	43-013-31533	2236 FNL & 1855 FEL	Antelope Creek	5S	3W	18	SWNE
14-20-H62-4650	14-20-H62-3518	Ute Tribal	7-29	<del>29-08B</del>	43-013-31339	2675 FNL & 725 FEL	Antelope Creek	5S	3W	29	NESE
14-20-H62-4650	14-20-H62-3517	Ute Tribal	11-28	<del>28-11</del>	43-013-31575	2171 FSL & 2107 FWL	Antelope Creek	5S	3W	28	NESE
14-20-H62-4650	14-20-H62-3513	Ute Tribal	10-18	<del>18-10</del>	43-013-31595	1954 FSL & 1894 FEL	Antelope Creek	5S	3W	18	NWSE
14-20-H62-4650	14-20-H62-3517	Ute Tribal	13-28	<del>28-13</del>	43-013-31576	712 FSL & 553 FWL	Antelope Creek	5S	3W	28	SWSW
14-20-H62-4650	14-20-H62-3517	Ute Tribal	6-28	<del>28-06</del>	43-013-31594		Antelope Creek	5S	3W	28	SENW
14-20-H62-4650	14-20-H62-3521	Ute Tribal	1A-32	<del>32-01</del>	43-013-31577	759 FNL & 502 FEL	Antelope Creek	5S	3W	32	NENE

# PETROGLYPH Operating Company, Inc.

6209 North Highway 61, Hutchinson, Kansas 67502 • P.O. Box 1839, Hutchinson, Kansas 67504-1839



VIA UPS

January 29, 1996

Ron Firth  
State of Utah  
Division of Oil, Gas & Mining  
3 Triad Center, Suite 350  
355 West North Temple  
Salt Lake City, UT 84180-1203

**CONFIDENTIAL**

Mr. Firth:

Enclosed please find logs listed below for the locations in Duchesne County, Utah. Also enclosed are copies of sundry notices to date.

New Well Name (Old)

04-04 (4A-4)

08-02 (2A-8)

08-01 (1A-8)

29-15 (15-29)

32-01 (1A-32)

Log

CNL, DIL, ML


CNL, DIL, ML

CNL, DIL, ML, CBL

CNL, DIL, ML

CNL, DIL, ML

43 01331577 32-01 (1A-32) 53 3W32 DRL CNL, DIL, ML



If you have any questions, please do not hesitate to contact me at (316) 665-8500.

Sincerely,

Angela R. Ely  
Administrative Operations Manager

ARE/ms

Enclosures

# PETROGLYPH Operating Company, Inc.

6209 North Highway 61, Hutchinson, Kansas 67502 • P.O. Box 1839, Hutchinson, Kansas 67504-1839



VIA UPS

January 29, 1996

Ron Firth  
State of Utah  
Division of Oil, Gas & Mining  
3 Triad Center, Suite 350  
355 West North Temple  
Salt Lake City, UT 84180-1203

Mr. Firth:

Enclosed please find logs listed below for the locations in Duchesne County, Utah. Also enclosed are copies of sundry notices to date.

<u>New Well Name (Old)</u>	<u>Log</u>
<del>4301331574</del> 04-04 (4A-4) <del>SS 310 4</del> DRL	CNL, DIL, ML
4301331569 08-02 (2A-8) SS 3W 8 DRL	CNL, DIL, ML
4301331568 08-01 (1A-8) SS 3W 8 DRL	CNL, DIL, ML, CBL
4301331570 29-15 (15-29) SS 3W 29 DRL	CNL, DIL, ML
4301331577 32-01 (1A-32) SS 3W 32 DRL	CNL, DIL, ML

FEB - 1 1996

If you have any questions, please do not hesitate to contact me at (316) 665-8500.

Sincerely,

Angela R. Ely  
Administrative Operations Manager

ARE/ms


Enclosures

DEBRA - THESE ARE NOT MARKED  
CONFS BUT LOGS ARE ALL  
STAMPED "TIGHT HOLE"

28-1-96



VIA FACSIMILE (801) 359-3940



April 25, 1996

Lisha Cordova  
State of Utah  
Division of Oil, Gas & Mining  
3 Triad Center, Suite 350  
355 West North Temple  
Salt Lake City, UT 84180-1203

Lisha:

Further to our conversation, enclosed please find entity action forms you have not received for the wells referenced below:

<u>New Well Name (Old)</u>	<u>Spud Date</u>
04-03 (3A-4)	3/1/96
04-04 (4A-4)	1/5/96
28-06 (2A-8)	2/16/96
28-11(1A-8)	2/5/96
28-13 (15-29)	1/25/96
32-01 (1A-32)	1/16/96

I apologize for these not being sent in within the 5 working days following commencement of drilling operations, as stated in DOGM rules and regulations. If you have any further questions, please do not hesitate to contact me at (316) 665-8500.

Sincerely,

Angela R. Ely  
Administrative Operations Manager

ARE/ms

Enclosures

pc: Deanna Bell

OPERATOR Petroglyph Operating Company, Inc.  
 ADDRESS P.O. Box 1839  
Hutchinson, KS 67504-1839


OPERATOR ACCT. NO. N3800

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
A			43-013-31577	Ute Tribal 32-01	NENE	32	5S	3W	Duchesne	1/16/96	
WELL 1 COMMENTS: This has its own tank battery.											
B	09389		43-013-31576	Ute Tribal 28-13	SWSW	28	5S	3W	Duchesne	1/25/96	
WELL 2 COMMENTS: This well shares a common tank battery with 29-09, 29-16, 29-08A, 28-12, 29-15, 28-13.											
B	09396		43-013-31575	Ute Tribal 28-11	NESE	28	5S	3W	Duchesne	2/5/96	
WELL 3 COMMENTS: This well shares a common tank battery with 28-05, 28-06, 28-11.											
B	09396		43-013-31594	Ute Tribal 28-06	SENW	28	5S	3W	Duchesne	2/16/96	
WELL 4 COMMENTS: This well shares a common tank battery with 28-05, 28-06, 28-11.											
B	11780		43-013-31574	Ute Tribal 04-04	NWNW	4	5S	3W	Duchesne	1/5/96	
WELL 5 COMMENTS: This well shares a common tank battery with 04-06, 04-05, 04-04.											

ACTION CODES (See instructions on back of form)

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

  
 Signature  
 Admin. Opns. Manager 4/25/96  
 Title  
 Date  
 Phone No. (316) 665-8500

UTAH DIVISION OF OIL, GAS AND MINING  
**OIL AND GAS WELL INSPECTION RECORD**

Operator: PETROGLYPH OPERATING CO Lease Number: INDIAN  
 Well Name: UTE TRIBAL 32-01 API Number: 43-013-31577  
 Sec: 32 Twp: 5S Rng: 3W County: DUCHESNE Field: ANTELOPE CREEK  
 Well Status: DRL 50W

GENERAL	Inspected (✓)
1. Well Identification	✓
2. Well Equipment	✓
3. Environmental Protection	✓
4. Temporary/Emergency Pits	✓
5. Spills, Discharges, Seepage	✓
Remarks: <u>OPEN RESERVE PIT. PRODUCTION CASING (NOT YET COMPLETED)</u>	

OIL PRODUCTION	Inspected (✓)
1. Method of Measurement: Tank Gauge <input type="checkbox"/> LACT Unit <input type="checkbox"/> Other <input type="checkbox"/>	✓
2. Storage Facilities	✓
3. Lines Leaving Storage Facilities Sealed/Locked	✓
4. Oil Handling/Treatment Equipment	✓
Remarks: <u>N/A</u>	

GAS PRODUCTION	Inspected (✓)
1. Type of Gas Production: Gas Well <input type="checkbox"/> Casinghead <input type="checkbox"/>	
2. Gas Disposition: Sold <input type="checkbox"/> Flared/Vented <input type="checkbox"/> Used on Lease <input type="checkbox"/> Other <input type="checkbox"/>	
3. Method of Measurement: Orifice Meter <input type="checkbox"/> Turbine Meter <input type="checkbox"/> Estimated <input type="checkbox"/> Other <input type="checkbox"/>	
4. Gas Handling/Treatment Equipment	
Remarks: <u>N/A</u>	

PRODUCED WATER DISPOSAL	Inspected (✓)
1. Disposal Method: Unlined Pit <input type="checkbox"/> Lined Pit <input type="checkbox"/> Subsurface <input type="checkbox"/> Other <input type="checkbox"/>	
2. If Disposal by Pits, Are Pits Satisfactory? Yes <input type="checkbox"/> No <input type="checkbox"/>	
3. Other E & P Waste Disposal	
Remarks: <u>N/A</u>	


Inspector: *Dennis S. Ryan* Date: 5/30/96

**CONFIDENTIAL**

VIA UPS

July 5, 1996

Ron Firth  
State of Utah  
Division of Oil, Gas & Mining  
3 Triad Center, Suite 350  
355 West North Temple  
Salt Lake City, UT 84180-1203



Mr. Firth:

Enclosed please find the logs listed below for the wells located in Duchesne County, Utah.

<u>Well Name</u>	<u>Log</u>
Ute Tribal 04-02 43013 15656	CNL, AIL 55 3W 4
Ute Tribal 04-03 43013 31617	CBL55 3W 4
Ute Tribal 04-04 43013 31574	CBL55 3W 4
Ute Tribal 05-01 43013 31658	CNL, AIL, CBL55 3W 5
Ute Tribal 09-04 43013 31660	CNL, AIL, CBL55 3W 9
Ute Tribal 18-03 43013 31528	CNL, AIL 55 3W 18
Ute Tribal 18-10 43013 31595	CNL, AIL, CBL55 3W 18
Ute Tribal 28-06 43013 31594	CBL55 3W 28
Ute Tribal 28-11 43013 31575	CBL55 3W 28
Ute Tribal 28-13 43013 31576	CBL55 3W 28
Ute Tribal 32-01 43013 31577	CBL55 3W 32

If you have any questions, please do not hesitate to contact me at (316) 665-8500.

Sincerely,

**CONFIDENTIAL**

*Angela R. Ely*  
Angela R. Ely  
Administrative Operations Manager

ARE/ms

Enclosures

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

WAITING ON COMPLETION

5. LEASE DESIGNATION AND SERIAL NO.  
14-20-H62-3521

6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
Ute Indian Tribe

7. UNIT AGREEMENT NAME  
14-20-H62-4650

8. FARM OR LEASE NAME  
Ute Tribal

9. WELL NO.  
Ute Tribal 32-01

10. FIELD AND POOL, OR WILDCAT  
Antelope Creek

11. SEC., T., R., M., OR BLOCK AND  
SURVEY OR AREA  
NENE SEC 32-T5S-R3W

WELL COMPLETION OR RECOMPLETION REPORT AND LOG\*

1.a. TYPE OF WELL: Oil Well  Gas Well  Dry  Other waiting on completion  
b. TYPE OF COMPLETION: New Well  Workover  Deepen  Plug Back  Diff. Reserv.  Other

2. NAME OF OPERATOR  
PETROGLYPH OPERATING COMPANY, INC.

3. ADDRESS OF OPERATOR  
P.O. BOX 607, ROOSEVELT, UT 84066 (435) 722-2531

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)\*  
At surface 759' FNL 502' FEL  
At top prod. interval reported below  
At total depth 6187' RTD

CONFIDENTIAL  
PERIOD  
EXPIRED  
ON 2-24-97

\*\*PLEASE NOTE: WELL DRILLED BUT NOT COMPLETED

14. PERMIT NO. 43-013-31577  
DATE ISSUED 12/12/95  
12. County or Parish Duchesne  
13. State Utah

15. DATE SPUDDED 1/16/96  
16. DATE T.D. REACHED 1/24/96  
17. DATE COMPLETED (Ready to prod.)  
18. ELEVATIONS (DF, RKB, RT, GR, ETC.)\*  
19. ELEV. CASINGHEAD

20. TOTAL DEPTH, MD & TVD 6187' TD  
21. PLUG BACK T.D., MD & TVD  
22. IF MULTIPLE COMPL., HOW MANY\*  
23. INTERVALS DRILLED BY  
ROTARY TOOLS  
CABLE TOOLS

24. PRODUCING INTERVAL(S) OF THIS COMPLETION -- TOP, BOTTOM, NAME (MD AND TVD)\*  
25. WAS DIRECTIONAL SURVEY MADE  
No

26. TYPE ELECTRIC AND OTHER LOGS RUN  
Gamma Ray to surface, Density-Compensated Neutron Porosity, AIT (normal suite), CBL 2-1-96  
27. WAS WELL CORED  
No

28. CASING RECORD (Report all strings set in well)

CASING SIZE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
8-5/8"	24.0	270'	12-1/4"	150 sxs "G" w/2% SI	
5-1/2"	15.5	5660	7-7/8"	75 sxs Highlift & 390 sxs RFC	

29. LINER RECORD

SIZE	TOP	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)

30. TUBING RECORD

31. PERFORATION RECORD (Interval, size and number)  
CONFIDENTIAL

DEPTH INTERVAL (MD)	ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.	AMOUNT AND KIND OF MATERIAL USED

33. PRODUCTION

DATE FIRST PRODUCTION	PRODUCTION METHOD (Flowing, gas lift, pumping - size and type of pump)	WELL STATUS (Producing or shut-in) producing 8/23/99					
DATE OF TEST	HOURS TESTED	CHOKE SIZE	PROD'N FOR TEST PERIOD	OIL - BBL.	GAS - MCF.	WATER - BBL.	GAS-OIL RATIO
FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24 HR. RATE	OIL - BBL.	GAS - MCF.	WATER - BBL.	OIL GRAVITY - API (CORR.)	

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)  
Sold, used for fuel  
TEST WITNESSED BY

35. LIST OF ATTACHMENTS

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records  
Signed Jenna Bell Title Operations Coordinator Date 7/30/99

\*(See Instructions and Spaces for Additional Data on Reverse Side)

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly or willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\* Well drilled, has well head. Probably will  
give producer. May enter again re - Judy - Telecom  
8/23/99 to Hutchison/KS/C/H/D

RECEIVED  
AUG 16 1999  
DIV. OF OIL, GAS & MINING

JUL-07-2003 MON 09:40 AM GAS & MINING

FAX NO. 801 359 3940

P. 02/03

STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: Petroglyph Operating Co.  
Address: P.O. Box 607  
city Roosevelt  
state Ut. zip 84066

Operator Account Number: N 3800

Phone Number: 435-722-2531

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-013-31577	Ute Tribal 32-01		NE NE	32	5S	3W	Duchesne
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
C	11910	09389				October-04	
Comments: <u>Green</u>							<u>11/30/04 ER</u>

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Callie Duncan  
Name (Please Print)  
Callie Duncan  
Signature  
Production Asst 11-30-04  
Title Date

(3/2000)

RECEIVED  
NOV 30 2004

DIV. OF OIL, GAS & MINING

07/07/03 MON 09:40 [TX/RX NO 76011]