

**FILE NOTATIONS**

Entered in NID File ✓  
Entered On S/R Sheet \_\_\_\_\_  
Location Map Filled ✓  
Card Indexed ✓  
IWR for State or Fee Land \_\_\_\_\_

Checked by Chief R  
Copy NID to Field Office ✓  
Approval Letter ✓  
Disapproval Letter \_\_\_\_\_

**COMPLETION DATA:**

Date Well Completed 9-17-62 Location Inspected \_\_\_\_\_  
OW \_\_\_\_\_ WW \_\_\_\_\_ TA \_\_\_\_\_ Bond released \_\_\_\_\_  
GW \_\_\_\_\_ OS \_\_\_\_\_ PA ✓ State of Fee Land \_\_\_\_\_

**LOGS FILED**

Driller's Log 10-4-62  
Electric Logs (No. 1-3)  
E \_\_\_\_\_ EI ✓ GR \_\_\_\_\_ GRN ✓ Micro ✓  
Lat. \_\_\_\_\_ Mi-L \_\_\_\_\_ Sonic \_\_\_\_\_ Others \_\_\_\_\_

*Subj. Report of Abandonment.*

July 10, 1962

Mr. Donald F. Russell  
Conservation Division  
U. S. Geological Survey  
457 Federal Building  
Salt Lake City, Utah

Re: Amerada Petroleum Corporation  
U.S.A. Colman Well No. 1, West  
Sinbad Area, Devils Canyon,  
Lease No. U-038026, Section 17,  
T23S, R9E, Emery County, Utah.

Dear Sir:

We are enclosing original and three (3) copies of Form No. 9-331a with plats attached for drilling Amerada - U. S. A. Colman No. 1, located in Section 17, T23S, R9E, Emery County, Utah.

Copies of Form No. 9-331a with plats and copy of this letter will be mailed to Mr. C. B. Feight, State of Utah, Conservation Department, Salt Lake City, Utah, by ourselves.

Should you need additional information on this well, kindly call collect.

Thank you very much.

Very truly yours,

AMERADA PETROLEUM CORPORATION

By *D. F. Furse*  
D. F. Furse  
Production Department

DFR/p

cc: Mr. C. B. Feight  
Room 310, Newhouse Bldg.  
Salt Lake City, Utah.


*Copy file*

(SUBMIT IN TRIPLICATE)

Land Office Salt Lake City, Utah  
Lease No. Fed. Utah-028026  
Unit U.S.A. Colman

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

T238  
R7E



SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

July 10, 1962

*U.S.A. Colman*

Well No. 1 is located 1820' ft. from S line and 820' ft. from W line of sec. 17

*SE- NW- SW- Sec-17*  
(¼ Sec. and Sec. No.)

23S  
(Twp.)

9E  
(Range)

51N  
(Meridian)

Wildcat  
(Field)

Esury  
(County or Subdivision)

Utah  
(State or Territory)

The elevation of the derrick floor above sea level is 7046.2 ft. Ungraded Ground.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Approximate Total Depth: To be drilled to Approximately 3500'.

CASING: Will set approximately 200' of 8-5/8" 24# Sals. Casing and cement with sufficient cement to Circulate to Surface.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Amerada Petroleum Corporation

Address Box 1469

Durango, Colorado

Phone CR-7-5353

By D.F. Purse D.F. Purse

Title Foreman

COMPANY AMERADA PETROLEUM CORPORATION

Well Name & No. U. S. A. Colman


Lease No. Utah-038026

Location 1820' FROM THE SOUTH LINE & 820' FROM THE WEST LINE

Being in NW SW

Sec. 17, T 23 S, R 9 E, S.I.M., Emery County, Utah

Ground Elevation 7046.2' ungraded ground

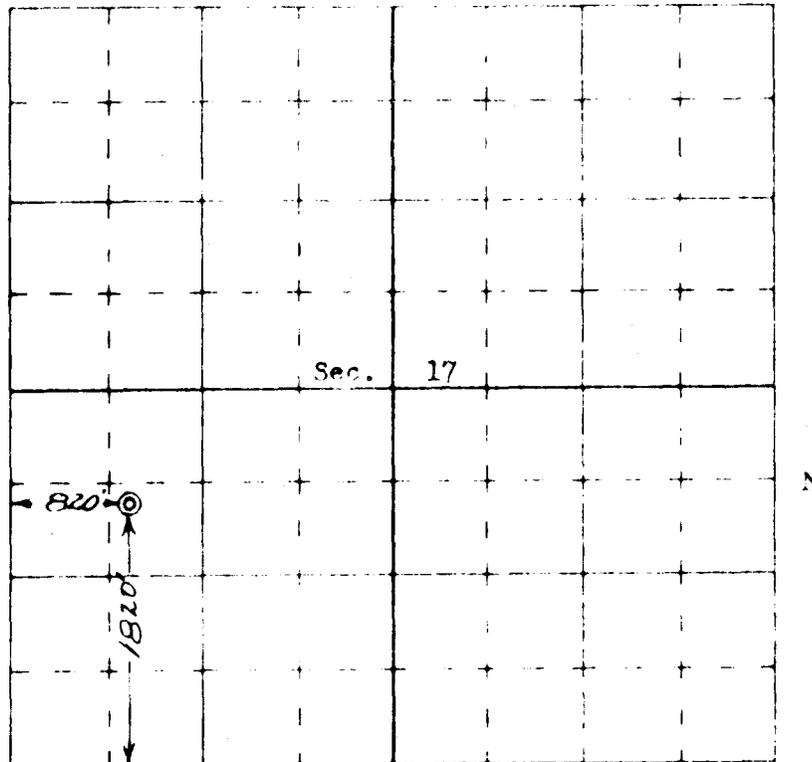

Scale - 4 inches equals 1 mile

Surveyed 4 July

19 62

This is to certify that the above plat was prepared from field notes of actual surveys made by me or under my supervision and that the same are true and correct to the best of my knowledge and belief.

Registered Land Surveyor  
Utah Reg. No. 1472  
James F. Leese

FILE IN DUPLICATE

OIL & GAS CONSERVATION COMMISSION  
OF THE STATE OF UTAH

DESIGNATION OF AGENT

The undersigned producer, operator, transporter, refiner, gasoline or initial purchaser who is conducting oil and/or gas operations in the State of Utah, does, pursuant to the Rules and Regulations, and Rules of Practice and Procedure of the Oil and Gas Conservation Commission of the State of Utah, hereby appoint, George A. Critchlow and/or A.W. Watson whose address is 1320 Continental Bank Bldg., Salt Lake City, Utah (his, her or its) designated agent to accept and to be served with notices from said Commission, or from other persons authorized under the Oil and Gas Conservation Act of the State of Utah.

The undersigned further agrees to immediately report in writing, all changes of address of the agent, and any termination of the agent's authority, and in the latter case, the designation of a new agent or agents shall be immediately made. This designation of agent, however, shall remain in full force and effect until and unless a new designation agent is filed in accordance with said statute and said regulations.

Effective Date of Designation January 4, 1944

Company Amerada Petroleum Corporation Address P. O. Box 2040, Tulsa 2, Oklahoma

By T. H. Humphreys Title Assistant Secretary  
(Signature)  
T. H. Humphreys

NOTE: Agent must be a resident of Utah.

July 11, 1962

Amerada Petroleum Corporation  
Box 1469  
Durango, Colorado

Attention: D. F. Furse

Gentlemen:

This is to acknowledge receipt of your notice of intention to drill Well No. U.S.A. Colman #1, which is to be located 1820 feet from the south line and 820 feet from the west line of Section 17, Township 23 South, Range 9 East, SLBM, Emery County, Utah.

Please be advised that insofar as this office is concerned approval to drill said well is hereby granted. However, this approval is conditional upon a Designation of Agent being filed with this Commission in accordance with Rule A-4, General Rules and Regulations and Rules of Practice and Procedure, Utah State Oil and Gas Conservation Commission.

This approval terminates within 90 days if the above mentioned well has not been spudded in within said period.

Very truly yours,

OIL & GAS CONSERVATION COMMISSION

CLEON B. FEIGHT  
EXECUTIVE DIRECTOR

CBF:cn

cc: D. F. Russell, Dist. Eng.  
USGS - Salt Lake City, Utah

H. L. Coonts, Petroleum Eng.  
OGCC - Moab, Utah

Encl.

August 27, 1962

Mr. D. F. Russell  
U. S. Geological Survey  
416 Empire Building  
231 East 4th South  
Salt Lake City 11, Utah

Re: Amerada Petroleum Corporation, U.S.A.  
Colman Well No. 1, Sec. 17, 23S, 9E,  
Lease No. Fed. Utah-038026.

Dear Sir:

We are enclosing original and three copies of Form No. 9-331a for subsequent report on 7-5/8" surface casing setting.


We respectfully request that all pertinent information submitted to your office on the above well be filed as "Confidential" and held as such until further notice, exceptions being the location foot-ages, spud data and surface casing.

Copies of the above form are being mailed to Mr. C. B. Feight, State of Utah, Conservation Department, Salt Lake City, Utah.

Thank you very kindly for this favor.

Yours very truly,

AMERADA PETROLEUM CORPORATION

  
D. F. FURSE, Foreman

DFF/et

cc: Mr. C. B. Feight  
file

*Copy H. L. C.*


(SUBMIT IN TRIPLICATE)

Land Office Salt Lake City, Utah

Lease No. Fed. Utah-038026

Unit U.S.A. Colmen

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY



SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....
NOTICE OF INTENTION TO ABANDON WELL.....	<u>Subsequent report for 7-5/8" surface casing mudding</u>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

1962

Well No. 1 is located 1820 ft. from S line and 000 ft. from W line of sec. 17  
23-S 9-R S1M  
 (1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Wildcat Emery Utah  
 (Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 7046.2 ft. Ungraded Ground

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

8/24/62 - 237' TD: Spud 9-5/8" hole at 2:00 P.M. 8/22/62.  
 Set 7-5/8" OD 26.4# SS Casing at 232', Texas Pattern shoe on bottom.  
 Cemented with 100 sacks reg. Halliburton bulk 2% Gel. and 2% HA-5 cement. Plug pumped to 200' at 4 A.M. 8/24/62. Cement circulated.

Tested BOP and Surface casing with 1000# pressure for 30 minutes - Held OK.

8/25/62 Drilling ahead.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Amerada Petroleum Corporation

Address Box 1469

Durango, Colorado

Phone: Cherry 7-5353

By R. F. Furse R. F. Furse

Title Foreman

*George H. ...*

(SUBMIT IN TRIPLICATE)

Land Office **Salt Lake City, Utah**

Lease No. **Fed-Utah-7038026**

Unit **U. S. A. Colman**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

T23S  
R9E



SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....	<b>Subsequent Report for Drilling</b>	
	<b>Deeper</b>	<b>X</b>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

September 14, 19 62

Well No. **1** is located **1820'** ft. from **[N]** line and **820'** ft. from **[E]** line of sec. **17**

**R4-S4-Sec-17** (1/4 Sec. and Sec. No.)      **23E** (Twp.)      **9E** (Range)      **S14** (Meridian)  
**Wildcat** (Field)      **Emery** (County or Subdivision)      **Utah** (State or Territory)

The elevation of the derrick floor above sea level is **7046.2** ft. **Ungraded Ground.**

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

**9/24/62: 3457' Drilling.**

**Propose to drill to 4000' or less for conclusive tests.**

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **Amerada Petroleum Corporation**

Address **Box 1469**

**Durango, Colorado**

**GH-7-5353**

By *A. F. Furse* **D.F. Furse**

Title **Foreman**


(SUBMIT IN TRIPLICATE)

Land Office Salt Lake City, Utah

Lease No. Fed-Utah-4038026

Unit U. S. A. Colman

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY



T236  
R9E

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....		SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....	<input checked="" type="checkbox"/>		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

September 16, 1962

Well No. 1 is located 1820 ft. from S line and 820 ft. from W line of sec. 17  
SW  
SW-17-Sec-17 T36 R9E 61N  
 (1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Wildcat Emery County Utah  
 (Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is \_\_\_\_\_ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

9/16/62- 3665' Total Depth; Propose to Plug and Abandon, will spot cement plugs as follows:  
 2300' to 2150' w/20 Sacks Cement, 60' Plug  
 1900' to 1180' w/70 Sacks Cement, 150' Plug  
 930' to 850' w/20 Sacks Cement, 60' Plug  
 250' to 170' w/20 Sacks Cement, 60' Plug, which is 18' out and 62' in bottom of 7-5/8" casing. (Surface)  
 10' to zero' in top of 7-5/8" surface casing.  
 Will install dry hole marker in top of 7-5/8" surface.  
 All intervals between plugs are filled with rotary mud.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Anorada Petroleum Corporation

Address Box 1469, Durango, Colorado

PH-267-3353

By L.A. Pettyjohn L.A. Pettyjohn

Title District Field Clerk

270

(SUBMIT IN TRIPLICATE)

Land Office Salt Lake City, Utah

Lease No. Fed-Utah-#038026

Unit U. S. A. Colman

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

T238  
R9E

Sec-17	

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....		SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....	<b>X</b>		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

September 16, 1962

Well No. 1 is located 1820 ft. from SW line and 820 ft. from W line of sec. 17

SW  
NW-SE-Sec-17 (1/4 Sec. and Sec. No.)      235 (Twp.)      9E (Range)      S1M (Meridian)

Wildcat (Field)      Emery County (County or Subdivision)      Utah (State or Territory)

The elevation of the derrick floor above sea level is \_\_\_\_\_ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

9/16/62- 3665' Total Depth: Propose to Plug and Abandon, will spot cement plugs as follows:

- 2200' to 2120' W/20 Sacks Cement, 80' Plug
- 1300' to 1180' W/30 Sacks Cement, 120' Plug
- 930' to 850' W/20 Sacks Cement, 80' Plug
- 250' to 170' W/20 Sacks Cement, 80' Plug, which is 18' out and 62' in bottom of 7-5/8" Casing. (Surface)
- 10' to Zero' in top of 7-5/8" Surface casing.

Will install dry hole marker in top of 7-5/8" Surface.  
All intervals between plugs are filled with rotary mud.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Amerada Petroleum Corporation

Address Box 1469, Durango, Colorado

FH-247-5353

By L.A. Pettyjohn L.A. Pettyjohn

Title District Field Clerk



**SHOOTING RECORD**

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
None						

**TOOLS USED**

Rotary tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from **0+** feet to **3665** feet TD  
 Cable tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

**DATES**

None - Dry Hole - P&A Put to producing **9-17-62** None - P&A - Dry Hole<sup>19</sup>  
 The production for the first 24 hours was \_\_\_\_\_ barrels of fluid of which \_\_\_\_\_% was oil; \_\_\_\_\_% emulsion; \_\_\_\_\_% water; and \_\_\_\_\_% sediment. Gravity, °Bé. \_\_\_\_\_  
 If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_  
 Rock pressure, lbs. per sq. in. \_\_\_\_\_

**EMPLOYEES**

Bob DeLong, Driller Jim Lang, Driller  
 H.W. Glingman, Driller

**FORMATION RECORD**

FROM-	TO-	TOTAL FEET	FORMATION
-------	-----	------------	-----------

0'	69'		Sand	2698'	2706'	Coconino
69'	237'		Sand and Valley Fill	2606'	2738'	Sand & Shale
237'	1142'		Sand	2738'	2776'	Sand
1142'	1267'		Chinlee	2776'	2779'	Coconino
1267'	1757'		Sand and red shale	2779'	3021'	Sand
1757'	1935'		Sandy Dolomite	3021'	3219'	Lime and Sand
1935'	2179'		Sand and Red Shale	3219'	3239'	Lime, sand and dolomite
2179'	2381'		Shale and Sand	3239'	3242'	Shale, sand, chert & dolomite.
2381'	2476'		Sand, red shale and Dolomite	3242'	3637'	Sand and Dolomite
2476'	2594'		Sand, shale & dolomite	3637'	3660'	Chert & Dolomite
2594'	2634'		Sand and Dolomite	3660'	3665'	Chert
2634'	2698'		Sand, shale & dolomite			3665' Total Depth

NO CORES OR DRILL STEM TESTS TAKEN.  
 SEE BACK FOR FINAL SCHLUMBERGER TOPS AND PLUGGING RECORD.

FORMATION RECORD—Continued

FROM—	TO—	TOTAL FEET—	FORMATION
<b>FINAL SCHLUMBERGER TOPS</b>			
	Navajo Ss	Surface	
	Kayenta Fm	587' +6465'	
	Wingate Ss	914' +6138'	
	Chinle Fm	1219' +5833'	
	Mossback Congl.	1408' +5644'	
	Upper Moenkopi	1483' +5569'	
	Marine Moenkopi	1761' +5291'	
	Sinbad Limestone	2034' +5018'	
	Lower Moenkopi		
	Fm	2140' +4912'	
	Kaibab Dolo.	2299' +4753'	
	Coconino Fm	2322' +4730'	
	Permo-Penna.	3004' +4048'	
	Mississippian	3223' +3829'	

**PLUGGING RECORD**

9-17-62 - 3665' Total Depth:

Spotted Cement plugs in hole as follows:

20 Sacks cement from 2200' to 2120' = 80' Plug

30 Sacks cement from 1300' to 1180' - 120' Plug

20 Sacks cement from 930' to 850' - 80' Plug

20 Sacks cement from 250' to 179' - which is 18' out and 62' in bottom of 7-5/8" casing.

10 Sacks cement from 21' to 6' - 15' Plug in top of surface to bottom of cellar.

Heavy rotary mud between all plugs.

Plugging completed 9:30 AM - 9/17/62.

Federal Dry Hole marker installed on well, location cleaned off and levelled and pits filled.

Well F&A

COILES

TOOLS USED

SHOOTING RECORD

STOPS AND COMMENTS

6-1107

*Coyey H.L.C.*

*PMB*

Sec-17	
T23S-R9E	

(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office Salt Lake City, Utah

Lease No. Fed-U-038026

Unit U. S. A. Colman

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT..... <b>X</b>
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....
NOTICE OF INTENTION TO ABANDON WELL.....	

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

September 21, 1962

Well No. 1 is located 1420' ft. from S line and 820 ft. from W line of sec. 17

N1/4 Sec-17 (1/4 Sec. and Sec. No.)      23S (Twp.)      R9E (Range)      SLM (Meridian)  
Wildcat-Devils Canyon (Field)      Durango (County or Subdivision)      Utah (State or Territory)

The elevation of the derrick floor above sea level is 7052' ft. EB

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

9-17-62 - 3665' TD, P&A: Rotary mud in hole.  
Spotted cement plugs in hole as follows:  
20 Sacks cement from 2200' to 2120' - 80' Plug,  
30 " " from 1300' to 1160' - 120' Plug,  
20 " " from 930' to 850' - 80' Plug,  
20 " " from 250' to 170' - 80' Plug, which is 16' out and 62' in bottom of 7-5/8" surface casing.  
10 " " from 21' to 6' - 15' Plug in top of surface to bottom of cellar.

Plugging completed 9:30AM-9/17/62.

All intervals between cement plugs are filled with heavy rotary mud.

Will level & clean up location when tools moved off.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Amerada Petroleum Corporation

Address Box 1469

Durango, Colorado

247-5353

By D.F. Furse **D.F. Furse**

Title Foreman

*Copy N. L.*

*page*

Sec-17			
7335-198			

(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office Salt Lake City, Utah  
Lease No. Fed-U-098026  
Unit U. S. A. Colman

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....	<b>Subsequent report for cleaning off, leveling loc. and filling pits</b>	<b>X</b>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

September 21, 1962

Well No. 1 is located 1820' ft. from SW line and 820 ft. from W line of sec. 17

NW/SW-Sec-17 (¼ Sec. and Sec. No.)      236 (Twp.)      9E (Range)      SLM (Meridian)  
Wildcat-Devils Canyon (Field)      San Juan (County or Subdivision)      Utah (State or Territory)

The elevation of the derrick floor above sea level is 7052' ft. -KB

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

**9-20-62 - Location cleaned off, levelled and pits filled.  
Federal regulation dry hole marker installed in top of 7-5/8" surface.**

"FINAL REPORT"

Log of Oil or Gas Well Form #9-330 and 2-copies of Schlumberger surveys will be mailed later.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Amerada Petroleum Corporation

Address Box 1469

Durango, Colorado

247-5353

By D.F. Furse D.F. Furse

Title Foreman