

FILE NOTATIONS

Entered in NID File

Entered On S R Sheet

Location Map Pinned

Card Indexed

I W R for State or Fee Land

COMPLETION DATA:

Date Well Completed 1-2-61

OW..... WW..... TA.....

GW..... OS..... FA.

LOGS FILED

Ditto Log. 2-2-61

El Logs (No.) 3

Lat.....  E-L.....

Mi-L.....

Sonic.....

GR.....

GR-N.

Others.....

Micro Coslipper Log

Checked by Chief RLS

Copy NID to Field Office

Approval Letter

Disapproval Letter

Location Inspected

Bond released State of Fee Land

COMPANY AMERADA PETROLEUM COMPANY

Well Name & No. USA Elliott (Tract #1) Well #1


Lease No. U-040460

Location 750' FROM THE SOUTH LINE & 550' FROM THE EAST LINE

Being in NE SE SE

Sec. 14 T 24 S, R 9 E, S.L.M., Emery County, Utah

Ground Elevation

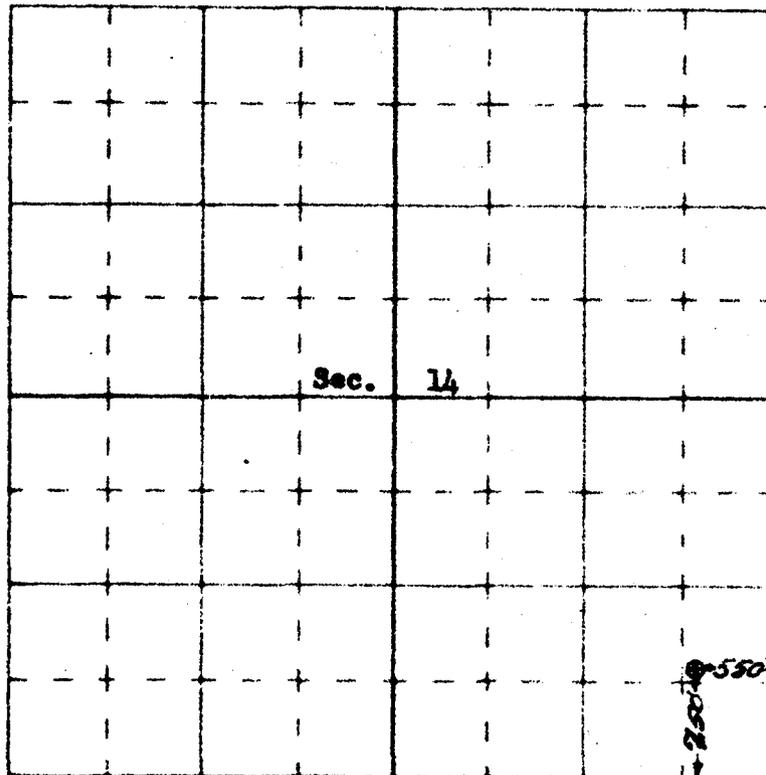

Scale — 4 inches equals 1 mile

Surveyed 22 September

1960

This is to certify that the above plat was prepared from field notes of actual surveys made by me or under my supervision and that the same are true and correct to the best of my knowledge and belief.

*James P. Leese*

Registered Land Surveyor.  
James P. Leese  
Utah Reg. No. 1472

SAN JUAN ENGINEERING CO., FARMINGTON, NEW MEXICO




(SUBMIT IN TRIPLICATE)

Land Office Salt Lake City, Utah

Lease No. Utah-040460

Unit USA Elliott Tract No.1.



UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

November 15, 1960

Well No. 1 is located 750 ft. from NS line and 550 ft. from E line of sec. 14

NE-SE-SE-Sec-14. 24S 9E S.L.M.  
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Wildcat-Sinbad Area Emery Utah  
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is \* ft. \*Not determined

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

APPROXIMATE DEPTH: 3500' or sufficient to test Cambrian.  
CASING: Will set 8-5/8" 24# casing @ Approx 350' and cement with sufficient cement to Circulate to surface.  
IF PRODUCTIVE: Will set 5 1/2" 14#-15.5# casing to total depth and cement with sufficient cement.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Amerada Petroleum Corporation

Address Box 1469

Durango, Colorado

By R.A. Drake

Title District Superintendent

COMPANY **AMERADA PETROLEUM COMPANY**

Well Name & No. **USA Elliott (Tract #1) Well #1**


Lease No. **U-040460**

Location **750' FROM THE SOUTH LINE & 550' FROM THE EAST LINE**

Being in **NE SE SE**

Sec. **14** T **24** S, R **9** E, S.L.M., **Emery County, Utah**

Ground Elevation

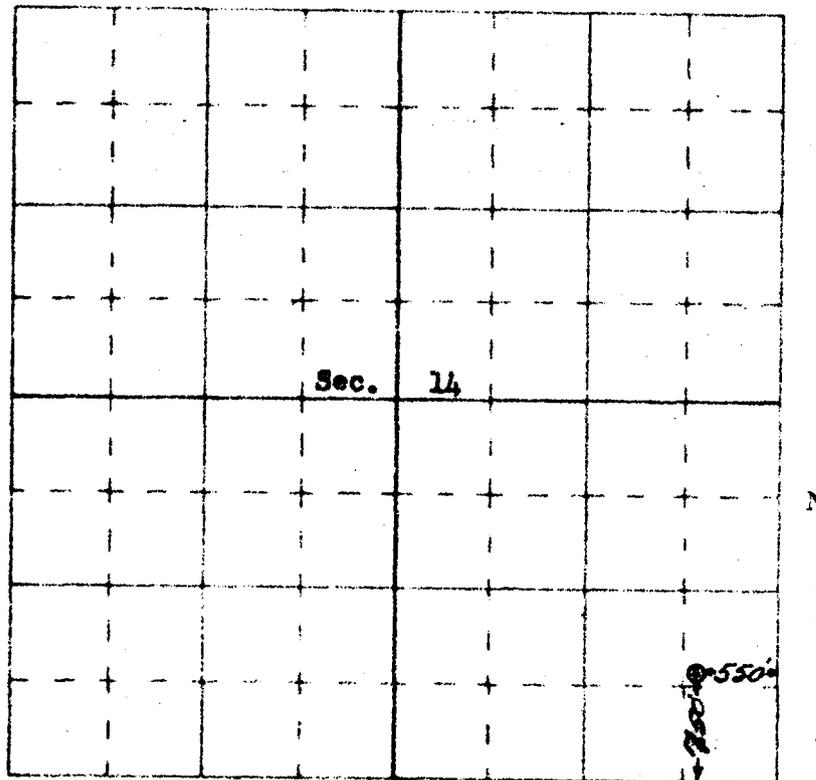

Scale -- 4 inches equals 1 mile

Surveyed **22 September**

**1960**

This is to certify that the above plat was prepared from field notes of actual surveys made by me or under my supervision and that the same are true and correct to the best of my knowledge and belief.

*James P. Leese*

Registered Land Surveyor.  
**James P. Leese**  
Utah Reg. No. **1472**

**SAN JUAN ENGINEERING CO., FARMINGTON, NEW MEXICO**



November 15, 1960

Mr. Donald F. Russell  
Conservation Division  
U. S. Geological Survey  
457 Federal Building  
Salt Lake City, Utah

Re: Amerada Petroleum Corporation  
U.S.A. Elliott Tract No. 1.  
Lease No. Utah-040460, Section  
14-T24S-R9E, Emery County,  
Utah

Dear Sir:

We are enclosing original and three (3) copies of Form-9-331a with Plats attached for drilling Amerada-U.S.A. Elliott Tract No. 1, Well No. 1, located in the NE-SE-SE of Section 14, T24S, R9E, Emery County, Utah, for your consideration and approval. Also, attached copy of letter mailed to your office dated November 3, 1960, concerning "Assignment of Oil & Gas Leasehold Operating Rights".

According to our records, "Designation of Agent" was mailed to your office as of October 25, 1960, by Mr. L. J. Handy, Amerada Petroleum Corporation, Tulsa, Oklahoma.

The subject location was originally staked 660' from South line and 660' from East line of section 14, and was moved 90' North and 110' East of original stake due to the location falling on extremely rough terrain which would necessitate a very large increase in expense for leveling location.

Therefore, we kindly request that permission be granted to drill the well as shown on the "Notice of Intention to Drill"; 750' from South line and 550' from East line of Section 14-T24S-R9E, if it should not conflict with any rule or order.

Copies of all forms have been mailed separately to the Conservation Department, State of Utah, by ourselves.

Very truly yours,

AMERADA PETROLEUM CORPORATION

By *R. A. Drake*

R. A. Drake  
District Superintendent  
Production Department

RAD/P

cc: Mr. C. B. Feight ✓  
State of Utah  
Conservation Department  
Salt Lake City, Utah

Mr. Feight: If additional information will you kindly advise, by letter or Telephone, collect.

November 17, 1960

Amerada Petroleum Corp.  
Box 1469  
Durango, Colorado

Attention: R. A. Drake, Dist. Supt.

Gentlemen:

This is to acknowledge receipt of your notice of intention to drill Well No. USA Elliott Tract A, which is to be located 750 feet from the south line and 550 feet from the east line of Section 14, Township 24 South, Range 9 East, BLM, Emery County, Utah.

Please be advised that insofar as this office is concerned approval to drill said well is hereby granted. However, this approval is conditional upon a Plat being filed with this office in accordance with Rule C-4 (a), General Rules and Regulations and Rules of Practice and Procedure, Utah State Oil and Gas Conservation Commission.

This approval terminates within 90 days if the above mentioned well has not been spudded in within said period.

Very truly yours,

OIL & GAS CONSERVATION COMMISSION

CLEON B. FEIGHT,  
EXECUTIVE SECRETARY

CBF:avg

cc: Don F. Russell, Dist. Eng.  
U. S. Geological Survey

H. L. Coonts - OGCC, Moab

AMERADA PETROLEUM CORPORATION

P. O. BOX 1469  
DURANGO, COLORADO

PHONE CH 7-2110

November 18, 1960

Mr. C. B. Feight  
The State of Utah  
Oil & Gas Conservation Comm.  
310 Newhouse Building  
10 Exchange Place  
Salt Lake City, Utah

Dear Sir:

Thank you very much for your letter of November 17, 1960, with reference to plats for the drilling of Amerada USA Elliott (Tract #1) Well No1, in Emery County, Utah. We are very sorry these Plats did not accompany the "Notice of Intention to Drill", therefore, we are enclosing the necessary plats for drilling the subject well.

Very truly yours,

AMERADA PETROLEUM CORPORATION

By 

R. A. Drake


Production Department

RAD/P

Encl: 2-Plats

(SUBMIT IN TRIPLICATE)

Land Office Salt Lake City, Utah  
Lease No. Utah-04,0460  
Unit U.S.A. Elliott Tract #1



UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL	<b>Subsequent report of setting 8-5/8" surface casing</b>	<b>X</b>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

December 9, 1960

Well No. 1 is located 750' ft. from N line and 550' ft. from E line of sec. 14  
N-SE-SB-sec-14, 24S 9E SLM  
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Wildcat-14bed Area Sanery Utah  
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 6679' ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cement-

12/8/60 - 360' TD: Spud 1:00 PM, 12/9/60, 1 1/2" bit drilled.

Set 12 Jts. 8-5/8" OD 24#, J55, R2, SB Casing at 356' W/T-F shoe,  
Cemented by Halliburton with 250 sacks reg. cement, pumped plug to  
330' at 5:45 AM, 12/8/60, Max. Pressure 150#.  
Cement Circulated.

12/9/60:

Tested 8-5/8" Casing w/500# Pressure for 1/2 hour, held OK.

Drilling Ahead

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Amerada Petroleum Corporation

Company

Box 1469,

Address

Durango, Colorado

By

[Signature]  
District Mgr.

R.A. Drake

Title

U. S. LAND OFFICE


Utah,  
Salt Lake City,

SERIAL NUMBER

010160

LEASE OR PERMIT TO PROSPECT

U.S.A. Elliott, (Tract #1)

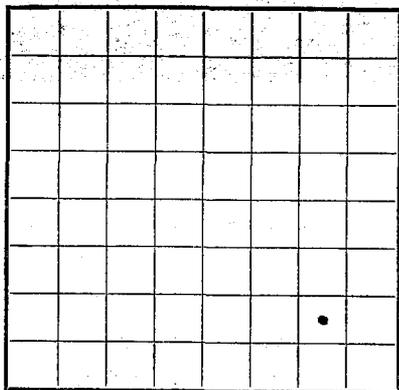

LOCATE WELL CORRECTLY

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company Amesada Petroleum Corporation Address Box 1469, Durango, Colorado

Lessor or Tract Federal Gov't. Field Sinbad Area State Utah

Well No. 1 Sec. 14 T. 24S R. 9E Meridian S.14N. County Moery

Location 750' ft. N of S Line and 550' ft. W of E Line of Section 14 Elevation 6679'  
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed D. J. Furse D. J. Furse

Date 1/9/61 Title Foreman

The summary on this page is for the condition of the well at above date.

Commenced drilling 12/5/60, 19\_\_\_\_ Finished drilling 1/2/61, 19\_\_\_\_

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from None encountered No. 4, from \_\_\_\_\_ to \_\_\_\_\_

No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_

No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

IMPORTANT WATER SANDS

No. 1, from None encountered No. 3, from \_\_\_\_\_ to \_\_\_\_\_

No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 4, from \_\_\_\_\_ to \_\_\_\_\_

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From-	To-	
<u>8-5/8"</u>	<u>24.2</u>	<u>5RT</u>	<u>J55</u>	<u>356'</u>	<u>TI</u>	<u>None</u>		<u>None</u>	

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>8-5/8"</u>	<u>356'</u>	<u>250'</u>	<u>Halliburton</u>	<u>Cement Circulated.</u>	

PLUGS AND ADAPTERS

Heaving plug—Material None Length \_\_\_\_\_ Depth set \_\_\_\_\_

Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

FOLD MARK

**SHOOTING RECORD**

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
None						

**TOOLS USED**

Rotary tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from ~~0~~ feet to ~~3253~~ feet TD  
 Cable tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

**DATES**

~~None~~ - ~~FLA~~, 19\_\_\_\_ Put to producing ~~10-FLA~~, 19\_\_\_\_  
 The production for the first 24 hours was \_\_\_\_\_ barrels of fluid of which \_\_\_\_\_% was oil; \_\_\_\_\_% emulsion; \_\_\_\_\_% water; and \_\_\_\_\_% sediment. Gravity, °Bé. \_\_\_\_\_  
 If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_  
 Rock pressure, lbs. per sq. in. \_\_\_\_\_

**EMPLOYEES**

~~W.V. Derrington~~, Driller ~~Jim Lang~~, Driller  
~~Bob DeLong~~, Driller \_\_\_\_\_, Driller

**FORMATION RECORD**

FROM—	TO—	TOTAL FEET	FORMATION
			See back for Schlumberger logs and other information.

[OVER]

16-43004-4

ROBINSON RECORD COMPANY

--	--	--	--	--

10-1-30

APPROVED \_\_\_\_\_  
 SUMMIT NUMBER \_\_\_\_\_  
 DATE \_\_\_\_\_  
 ADDRESS \_\_\_\_\_

1 FEB 1961

## FORMATION RECORD—Continued

FROM—	TO—	TOTAL FEET	FORMATION
0'	232'		Shale and Rock
232'	360'		Lime and Dolomite
360'	1023'		Sand
1023'	1115'		Lime and Dolomite
1115'	1895'		Sandy lime & Dolomite
1895'	3253'		Formation not known, no returns on samples.
	3253'		Total Depth.

**FIBAL SWINLEY-BURGER - TAMPA-NEUTRON TUPS.**

Lower Neenkopi	30'
Kaibab	300'
Loconino	244'
Madison	-Absent through erosion.
Guray	938'
Albert	1166'
Lynch "A"	1690'
Lynch "B"	1976'
Lynch Shale	2252'
Bowman-Hartman	2447'
Ophir	2816'
Tintic	3071'

No Side wall cores recovered.

**PLUGGING RECORD**

1/2/61 - 3253' ID: Spotted cement plug by Halliburton from 305' up to 325' with 20 Sacks cement, which is 29' below bottom of surface and 31' up in 8-5/8" surface casing, and spotted 30' plug from 30' to 0' in top of 8-5/8" surface casing. Rig Released 11:30 AM. Installed regulation dry hole marker in top of surface.

Subsequent report of logging under date of January 3, 1961.

Core 8 - cores as shown on Form 9-331a.

**SHOOTING RECORD**

LOGS AND SAMPLES

January 2, 1961

Mr. Donald F. Russell  
Conservation Division  
U. S. Geological Survey  
457 Federal Building  
Salt Lake City, Utah


Dear Sir:

We are enclosing original and (3) copies of Form No. 9-331a,  
"Notice of Intention to Abandon" Amerada - U.S.A. Elliott, (Tract  
No. 1) Well #1, for your consideration and approval.

Copy of these forms have been mailed to the Conservation Dep-  
artment, State of Utah, by ourselves.

Very truly yours,


AMERADA PETROLEUM CORPORATION

By 

L. A. Pettyjohn  
District Field Clerk

LP

cc: Mr. C. B. Feight  
State of Utah  
Conservation Department  
Salt Lake City, Utah



(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office Salt Lake City, Utah

Lease No. 040460

Unit U.S.A. Elliott, Trust  
No. 1, well #1.

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	<input checked="" type="checkbox"/>
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

January 2, 1960

Well No. 1 is located 790' ft. from S line and 590' ft. from E line of sec. 14  
S2-S3-Sec14 24S 9E Spl.M.  
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Wildcat-Sinbad Area Emery Utah  
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 6679' ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

**1-2-61- 3253' Total Depth**

Propose to Plug and Abandon and spot cement plugs as follows:


- 20 Sack Cement Plug from 385' to 325' - 29' out & 31' in 8-5/8" Surface Cas.
- 10 Sack Cement Plug from 30' to 0' Surface, in top of 8-5/8" Surface Cas.
- Install Dry hole marker in top of surface & abandon.
- 8-5/8" Surface Casing set at 356' as per report dated December 9, 1960.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Amerada Petroleum Corporation  
 Address Box 1469  
Durango, Colorado  
 By L.A. Pettyjohn  
 Title District Field Clerk

(SUBMIT IN TRIPLICATE)

Land Office Salt Lake City, Utah  
Lease No. 010460  
Unit U.S.A. Elliott, Trust  
No. 1, well #1.



UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT	X
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

January 2, 1960

Well No. 1 is located 790' ft. from SW line and 550' ft. from E line of sec. 14  
S2-S2-20214 24S 9E S2, L. M.  
 (1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Wildcat-Sinbad Area Emery Utah  
 (Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 6679' ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

1-2-61- 3259' Total Depth

Propose to Plug and Abandon and spot cement plugs as follows:

- 20 Sack Cement Plug from 385' to 325' - 29' out & 31' in 8-5/8" Surface Cag.
- 10 Sack Cement Plug from 30' to 0' Surface, in top of 8-5/8" Surface Cag.
- Install Dry hole marker in top of surface & abandon.
- 8-5/8" Surface Casing set at 356' as per report dated December 9, 1960.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Amerada Petroleum Corporation


Address Box 1469  
Durango, Colorado

By L.A. Pettyjohn L.A. Pettyjohn  
Title District Field Clerk

Land Office Salt Lake City, Utah  
Lease No. 010150  
Unit U.S.A. Elliott, Tract No. 1, well #1.

(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY



SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL	<u>Subsequent report of Coring</u>	<u>X</u>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

January 3, 19 61

Well No. 1 is located 750' ft. from S line and 330' ft. from E line of sec. 14  
31-35 Section 14 24S 9E S.L.M.  
 (¼ Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Wildcat-Sinbad Area Mojo Utah  
 (Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 6679' ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Core #8 - 3175'-3183' - Tintic, Cut 2', sec-2', C.T. 6 hrs. 47 min.  
 Desc: Sandstone, light gray to tan, fine to coarse grade, angular to sub-rounded, very poor sorting, poor to very poor porosity, few disseminated nodules glauconitic hematitic sandstone, a few thin stringers of reddish brown granite wash and reddish brown very micaceous shale, no chert.  
 No Drill Stem Tests Taken.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Amerada Petroleum Corporation  
 Address Box 1469  
Durango, Colorado  
 By [Signature] D.F. Jures  
 Title Foreman  
Production Department


Land Office **Salt Lake City, Utah**

Lease No. **040460**

Unit **U.S.A. Elliott, Tract No. 1, Well #1**

(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY



SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL	<b>Subsequent Report of Coring</b>	<b>X</b>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

January 3, 1961

Well No. **1** is located **750'** ft. from **XX** line and **550'** ft. from **EW** line of sec. **14**

**SE SE Section 14,** **24S** (Range) **36E** (Section)  
**Wildcat-Sinbad Area** (County subdivision) **Utah** Territory

The elevation of the derrick floor above sea level is **6579'** ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

- Core #1 - 2348'-2365' Lynch Shale, Cut and Rec-17' C.T. 9 Hrs. and 13 Min.**  
**Desc: 2348'-2350' Dolomite, light brown to dark tan, microcrystalline, sacrosic, tite, stringer or partings of dark gray lithographic limestone, rare pieces of glauconite, very poor faint cut; from dolomite upon standing in carbon tet, no other evidence of show.**  
**2350'-2365' Lithology as above with scattered patches of pyritized trilobite hash, no show.**
- Core #2 - 2388'-2398' Lynch Shale, Cut and Rec-10' C.T. 5 Hrs. and 1 Min.**  
**Desc: All soft chally dark gray dolomite and shale, no show.**
- Core #3 - 2826'-2850' Cambrian Ophir Shale, Cut 24' & Rec 14', C.T. 6 Hrs. & 9 Min.**  
**Desc: 2826'-2840' Shale, black to dark green, micaceous, small thin lenses and patches of light gray to buff very fine grained sandstone and siltstone with orange quartz grains and traces of glauconite. NO SHOW.**


I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **Amarada Petroleum Corporation**

Address **Box 1469**  
**Durango, Colorado**

By **D.P. Purse**

Title **Foreman**  
**Production Dept.**



(SUBMIT IN TRIPLICATE)  
UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office 040460  
Lease No. U.S.A. Elliott, Tract  
Unit No. 1, well #1.

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....
NOTICE OF INTENTION TO ABANDON WELL.....	<del>Subsequent report for Coring</del> .....

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

January 3, 19 61

Well No. 1 is located 750' ft. from N line and 550' ft. from E line of sec. 14  
SE-SE-Section 14, 24S 9E S.L.M.  
 (1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Wildcat-Sinbad Area Emery Utah  
 (Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 6679' ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cement-  
 points, and other important data.)

Core #4 - Cut 9" from 4001'-4011' - Cambrian Tintic Shale, Rec-7", C.T. 2 Hrs.  
 Desc: Sandstone, buff, quartzitic, very hard, lite, with abundant disseminated glauconite, and thin patches of partings of dark green shale. No Show.


Core #5 - 3097'-3113' - Cambrian Tintic, Cut 16', Rec-14', C.T. 4 Hrs. 6 Min.  
 Desc: 3097'-3111' - Sandstone, light gray to tan, fine to medium grained, angular, fair sorting, fair porosity, traces of glauconite, random coarse quartz grains, traces of rose quartz, poor cut, no odor, questionable spotty light tank oil stain throughout. Very poor Show.

Core #6 - 3 1/2 Hrs. Attempting to core at 3113' - No Results, would not core.

Core #7 - 3117'-3120' - Cambrian Tintic, Cut 3', Rec-5-3" Pieces of Sandstone, light gray to tan, to gray-green, med. grained, angular, locally dolomitic, few scattered grains of glauconite, a very few large milk white calcite inclusions, trace of mica. No Show.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Amorada Petroleum Corporation  
 Address AMORADA Box 1469  
Durango, Colorado  
 By B.F. Purso  
 Title Foreman  
Production Dept.



(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office Salt Lake City, Utah  
Lease No. 26060  
Unit J.A. Elliott, Tract  
No. 1, Well #1.

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	X
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

January 4, 1961

Well No. 1 is located 750' ft. from {N} line and 550' ft. from {E} line of sec. 14

24S 3E 61W  
(Twp.) (Range) (Meridian)  
Section 14,  
(1/4 Sec. and Sec. No.)  
Wilcox-Subad Area Montezuma Utah  
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 6579' ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

1/3/61 - Total Depth- 3253' - Plugged and Abandoned  
Cement plugs spotted in hole as follows; by Halliburton.  
325' to 325' 3/20 Sacks cement, ~~29'~~ 29' below surface casing  
shoe and 31' up inside of 8-5/8" surface casing.  
30' to 0' W/10 Sacks cement - To bottom of cellar.

Will install regulation dry hole marker in top of surface casing, when contractor moves substructure off location.

Left 356' of 8-5/8" OD 24S, 355, 85 Casing in hole.

Will clean, level location and fill pits when drilling contractor moves moves tools off location, and will file "Final Report" at that time.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Amerasia Petroleum Corporation

Address Box 1469

Durango, Colorado

By A. J. [Signature] D.F. Parve

Title Foreman  
Production Dept.

140

January 4, 1961

Mr. Donald F. Russell  
Conservation Division  
U. S. Geological Survey  
Salt Lake City, Utah

Dear Sir:

We are enclosing four (4) Originals with three (3) copies each of Form No. 9-331a, "Notice of Intention" reports for coring cores #1 thru 8, and "Subsequent Report of Abandonment" of Amerada - U.S.A. Elliott, (Tract #1,) Well No. 1, located in Emery County, Utah, for your consideration and approval.


Copies of these forms have been mailed to the Conservation Department, State of Utah, by ourselves.

Very truly yours,

BY D. F. Furse  
D. F. Furse  
Foreman  
Production Dept.

DFF/P

c.c. Mr. C. B. Feight  
State of Utah  
Conservation Dept.  
Salt Lake City, Utah



(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Budget Bureau No. 42-R358.4  
Approval expires 12-31-60.

Land Office Salt Lake City, Utah  
Lease No. 040460  
Unit U.S.A. Elliott, (Tract #1) Well #1.

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT	X
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

January 16, 19 61

Well No. 1 is located 750' ft. from [S] line and 550' ft. from [E] line of sec. 14  
SE-SE-Section 14, 24S 9E SLM.  
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Wildcat-Sixbad Area Emery Utah  
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 6679 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

**1/3/61 - 3253' Total Depth:**  
**8-5/8" Surface casing set @ 356', Cement Circulated; All surface left in hole**

Spotted cement plug w/20 Sacks cement by Halliburton Truck,  
 From 365' to 325' = 29' out and 31' up in 8-5/8" surface casing, and,  
 from 30' to 0' Surface, in top of ~~8-5/8"~~ 8-5/8" Casing with sacks  
 cement.

Installed 4" regulation dry hole marker in top of 8-5/8" surface.  
 Filled pits, cellar and levelled location.

~~Blindwork~~

"FINAL REPORT" on Form-9-331a, will file well log and Schlumberger reports  
 as soon as schlumberger logs received.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Amerada Petroleum Corporation  
 Address Box 1469  
Drango, Colorado  
CR-7-5353  
 By D.F. Furse D.F. Furse  
 Title Foreman

4  
KD  
January 16, 1961

Mr. Donald F. Russell  
Conservation Division  
U.S. Geological Survey  
457 Federal Building  
Salt Lake City, Utah

RE: U.S.A. Elliott, Tract  
No. 1, Well No. 1,  
Lease No. 040460.

Dear Sir:

We are enclosing original and three copies of Form-9-331a, "Subsequent Report of Abandonment", Final Report, for drilling of Amerada U.S.A. Elliott, Tract #1, Well #1, located in Section 14, 24S, 9E, Emery County, Utah.

Copies have been mailed to Mr. C. B. Feight, State of Utah Conservation Department, Salt Lake City, Utah, by ourselves.

Very truly yours,  
AMERADA PETROLEUM CORPORATION

By W. F. Furse  
W. F. Furse  
Production Foreman

DFF/P

CC: 4-copies  
Mr. C. B. Feight  
State Conser. Dept.  
Salt Lake City, Utah

W.

January 31, 1961

Mr. Donald F. Russell  
Conservation Division  
U. S. Geological Survey  
457 Federal Building  
Salt Lake City, Utah

Dear Sir:

We are enclosing original and four copies of Form 9-330, "Log of Oil or Gas Well", and under separate cover two copies of Schlumberger Logs, on Amerada - U.S.A. Elliott, Tract #1, Well No. 1, located in the Sinbad Area, Emery County, Utah.

We respectfully request that the Schlumberger Log Tops and other pertinent information be filed as "Confidential" on this well and held as such until further notice.

Copies have been mailed to Mr. C. B. Feight, State of Utah Conservation Department, Salt Lake City, Utah.

Thank you very kindly for this favor.

Very truly yours,

AMERADA PETROLEUM CORPORATION

By D. F. Furse  
D. F. Furse - Foreman  
Production Department

DFF/P

cc: Mr. C. B. Feight  
State Conservation Dept.  
Salt Lake City, Utah

P.S. Mr. Feight will you kindly hold the above information confidential in your office until further notice.


(SUBMIT IN TRIPLICATE)

Land Office Salt Lake City, Utah

Lease No. U-040460

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Under U.S.A. Elliott Tr. #1,  
Well #1.



SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....		SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			
<u>Notice of Int. to Re-Plug Well</u> .....	<u>X</u>		

For Abandonment / (INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

July 5, 1961

Well No. 1 is located 750' ft. from S line and 550' ft. from E line of sec. 14,

14-31-35 Sec. 14 (1/4 Sec. and Sec. No.)      T24S (Twp.)      R9E (Range)      S.L.M. (Meridian)  
Wildcat-Sinbad Area (Field)      Garret County, (County or Subdivision)      Utah (State or Territory)

The elevation of the derrick floor above sea level is 6679' ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

1/2/61 Total depth 3253'; Abandoned 1/2/61; 8-5/8" Surface set @ 356' w/250Sax Cmt. 6-3/4" Hole. Cement Circulated.

Propose to drill out existing cement plugs from 8-5/8" surface from top to 30' down and cement plug from 325' to 385'.

Fill hole with mud and spot cement plugs in hole as follows:

15 Sacks cement from 3090' to 3040'

18 Sacks cement from 2470' to 2410'

15 Sacks Cement from 1720' to 1670'

15 Sacks Cement from 970' to 920'

20 Sacks Cement from 385 to 325'

7 Sacks Cement from 30' to Zero - Bottom of Celler.

Install 4" Regulation marker in top of 8-5/8" surface casing and Abandon Well.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Acorda Petroleum Corporation

Address Box 1469,

Durango, Colorado

PH-CO-7-5353

By [Signature] L.H. Pettyjohn

Title District Field Clerk


win

Copy to HC

R.S.

Form 9-381a  
(Feb. 1951)

Budget Bureau No. 42-R358.4  
Approval expires 12-31-60.



(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office Salt Lake City, Utah

Lease No. U-640460

Unit U.S.S. Allison, Jr. 1,  
Well #1

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	<b>X</b>
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

July 10, 1961

Well No. 1 is located 750' ft. from S line and 550' ft. from E line of sec. 14.

14-02-02-0014      T24S      R9E      S.L.M.  
 (¼ Sec. and Sec. No.)      (Twp.)      (Range)      (Meridian)

Wildcat-14bed Area      Emery      Utah  
 (Field)      (County or Subdivision)      (State or Territory)

The elevation of the derrick floor above sea level is 6679' ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

1/2/61 - Original 14-3253'; Abandoned 1/2/61; Moved in and rigged up rotary tools 7/6/61; re-entered hole, drilled out existing cement plugs, filled hole w/rotary mud and spotted cement plugs in hole as listed below: 7/7/61.

- 15 Sacks Cement from 3090' to 3040'
- 16 Sacks Cement from 2470' to 2410'
- 15 Sacks Cement from 1720' to 1670'
- 15 Sacks Cement from 970' to 920'
- 18 Sacks Cement from 385' to 325' - 8-5/8" surface set @ 356' W/Cent. Circ.
- 7 Sacks Cement from 20' to zero - Top of 8-5/8" Surface Casing.

Installed 4" regulation dry hole marker in top of surface and abandoned well.

Note: log of this well and surveys were submitted in January 1961.  
"FINAL REPORT"

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Amerada Petroleum Corporation


Address Box 1469

Durango, Colorado

OH-7-5353

By [Signature] L.H. Pettyjohn

Title District Field Clerk



(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office Salt Lake City, Utah

Lease No. U-010460

Unit G. A. Elliott Tr. 1,  
Well #1

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....		SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....		<u>Subsequent Report For cleaning off &amp; leveling location</u>	<u>X</u>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

July 27, 1961

Well No. 1 is located 750' ft. from S line and 550' ft. from E line of sec. 14,

14-31-36-14  
(¼ Sec. and Sec. No.)

T24S  
(Twp.)

R9E  
(Range)

Salt  
(Meridian)

Wildcat-Indian Area  
(Field)

Essex  
(County or Subdivision)

Utah  
(State or Territory)

The elevation of the derrick floor above sea level is 6679' ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

**7/25/61 - Filled cellar, clean off and leveled location.  
Dry hole marker installed as per Regulation.**

"Final Report"

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Amerasia Petroleum Corporation

Address Box 1169,

Durango, Colorado

By D. P. Furse D. P. Furse

Title Foreman