

Subsequent Report of Abandonment

FILE NOTATIONS

Entered in NID File
Entered On S R Sheet _____
Location Map Pinned _____
Card Indexed
IWR for State or Fee Land _____

Checked by Chief _____
Copy NID to Field Office _____
Approval Letter _____
Disapproval Letter _____

COMPLETION DATA:


Date Well Completed 8-22-55
OW _____ WW _____ TA _____
GW _____ OS _____ PA

Location Inspected _____
Bond released _____
State of Fee Land _____

LOGS FILED

Driller's Log
Electric Logs (No.) 2

E _____ I _____ E-I GR _____ GR-N Micro _____
Lat _____ Mi-L _____ Sonic _____ Others _____




(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

and Office Salt Lake City
Lease No. 067293 - B
Unit Cedar Mountain

ORIGINAL FORWARDED TO CASPER

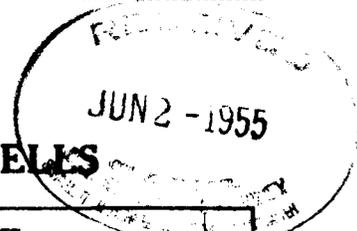

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

May 31, 1955

Well No. 1 is located 2310 ft. from S line and 2310 ft. from W line of sec. 29

NW/4 NW/4 SW/4 Section 29 T-19-S R-13-E SLM
(4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Weld Henry Utah
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 6171 ft. (Estimated)
6167 ft. ground level

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudlogging, cementing points, and all other important proposed work)

Reynolds proposes to drill the test well to 6,000 feet or granite which ever is the lesser depth. Approximately 300 feet of 10 3/4 inch, 32.75 pound, N-40 casing will be run with a sufficient amount of cement to completely encase the casing from bottom to top. All prospective oil and gas zones will be adequately tested by casing and/or drill stem testing. Mud will be used from the surface of the ground to total depth in order to insure good samples. Also a mud logging unit will be placed on the well to analyse all settings and mud from surface to total depth. Any oil or gas shows found by the mud logging unit will be adequately tested by either casing or drill stem testing or both. If oil or gas is found to be in commercial quantities, 5 1/2 inch casing will be run and cemented with sufficient cement to protect all commercial oil and gas zones.

(APPROVAL IS CONDITIONAL UPON COMPLIANCE WITH THE TERMS ATTACHED HERETO)

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Reynolds Mining Corporation

Address 2000 1/2 Main Avenue
Box 1308
Durango, Colorado
Phone 962

By C. E. McFarland
Resident Engineer

Reynolds Mining Corporation


Lease Name & No. Cedar Mountain No. 1 Lease No.

Location 2310' from the South line and 2310' from the West line.

Being in NE¹/₄SW¹/₄

Sec. 29, T19^S, R12^E, ~~N.M.P.M.~~ S. L. M., Emery County, Utah

Ground Elevation 6167, ungraded.

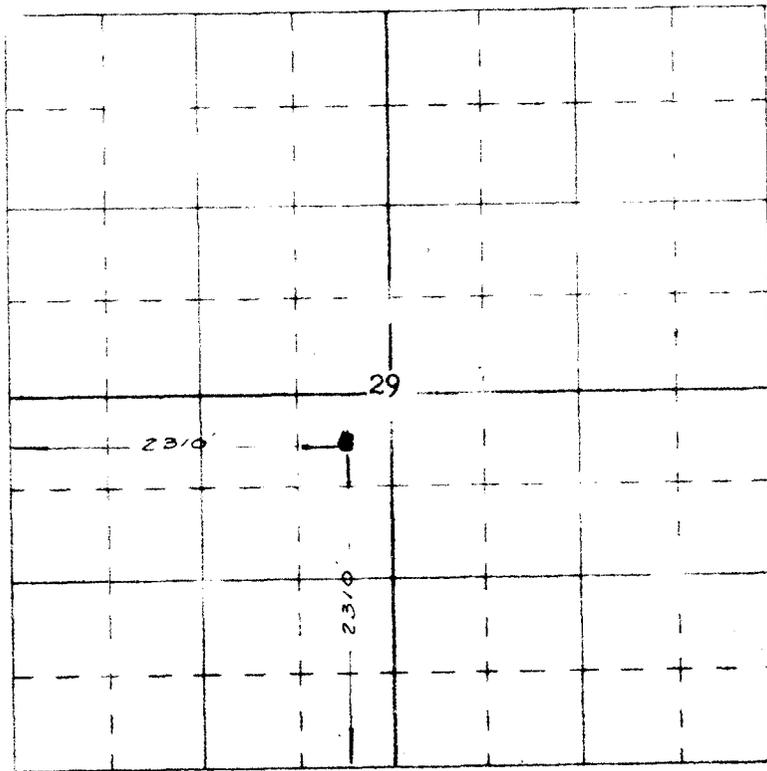

Scale -- 4 inches equals 1 mile

Surveyed May 24, 1955

This is to certify that the above plat was prepared from field notes of actual surveys made by me or under my supervision and that the same are true and correct to the best of my knowledge and belief.

Ernest V. Echohawk

Ernest V. Echohawk
Registered Land Surveyor
N. M. Reg. #1545
Practicing in Utah under Laws
regulating Professional Engrs.
and Land Surveyors, Utah Code 1953,
Title 58-10-16.



Land Office Salt Lake City, Utah
Lease No. 067193 -- B
Unit Cedar Mountain

(SUBMIT IN TRIPLICATE)



UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

ORIGINAL FOR...

JUN 30 1955

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	<input checked="" type="checkbox"/>
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	<input type="checkbox"/>
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	<input type="checkbox"/>
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	<input type="checkbox"/>
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	<input type="checkbox"/>
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	<input type="checkbox"/>
NOTICE OF INTENTION TO ABANDON WELL.....		<input type="checkbox"/>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

June 23, 1955

Well No. 1 is located 2310 ft. from N line and 2310 ft. from W line of sec. 29

NE/4 NE/4 SW/4 Section 29 T-19-S R-12-E SLM
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)

Wildcat (Field) Emery (County or Subdivision) Utah (State or Territory)

The elevation of the derrick floor above sea level is 6178 ft. (Estimated)
6167 Ft. Ground Level

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Cedar Mountain No. 1 was spudded at 5:00 p.m., June 8, 1955. Set 350.03 feet of 10 3/4 inch, 32.75 pound, surface casing at 364.03 feet, in 13 3/4 hole. Casing was set on June 15, 1955 and cemented with 215 sacks of ideal cement, cement circulated. The plug was down at 7:15 p.m., June 15, 1955. Ten feet of cement left in casing. Three hundred pounds pressure was left on casing until 8:00 a.m., June 16, 1955, then released. On June 16, 1955, 1000 psi was placed on the casing and allowed to stand for 30 minutes. The 1000 psi was maintained through 30 minute test.

I understand that this plan of work must have approval in writing by the Geological Survey before operations may be commenced.


Company Reynolds Mining Corporation
Oil and Gas Division
Address 1020 1/2 Main Avenue
Box 1328
Durango, Colorado
Phone 901

P. J. Farrell
C. C. McFarland
Petroleum Engineer


PRODUCTION

Form 9-229

U. S. LAND OFFICE Salt Lake City
SERIAL NUMBER 067193-B
LEASE OR PERMIT TO PROSPECT _____
Cedar Mountain

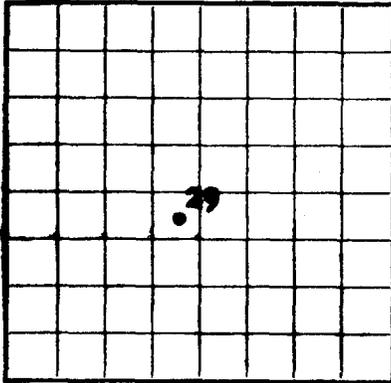

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

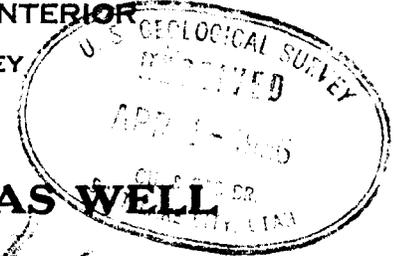

ORIGINAL RETURNED TO CASPER

LOG OF OIL OR GAS WELL

LOCATE WELL CORRECTLY

Company Reynolds Mining Corporation
Oil and Gas Division Address Post Office Box 1328, Durango, Colorado
Lessor or Tract Cedar Mountain Field Wildeat State Utah
Well No. 1 Sec. 29 T. 19S R. 12E Meridian SLM County Emery
Location 2310 ft. N of S Line and 2310 ft. E of W Line of Sec. 29, T. 19S, R. 12E Elevation 6167 GL
(through floor relative to datum)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed [Signature] C. J. Eakridge, Jr.
Title District Petroleum Engineer

Date April 3, 1956

The summary on this page is for the condition of the well at above date.

Commenced drilling June 8, 1955 Finished drilling August 17, 1955

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from None to _____ No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from None to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	LOG LEASING		Cut and pulled from	Perforated		Purpose
				Amount	Kind of shoe		From-	To-	
<u>10 3/4"</u>	<u>32.75</u>	<u>8</u>		<u>350.031</u>	<u>Float</u>				<u>Protect surface</u>

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>10 3/4"</u>	<u>364.031</u>	<u>215</u> sacks	<u>ideal cement Pump & plug</u>		

MARK

FOLD

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth set

Adapters—Material Size

SHOOTING RECORD - None

Shot	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from 0 feet to 6031 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

DATES - no production

Put to producing 19.....

The production for the first 24 hours was 124 barrels of fluid of which% was oil;% emulsion;% water; and% sediment. (Gravity, "Bé.)

If gas well, cu. ft. per 24 hours (Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES


Contract Driller Driller Driller

FORMATION RECORD - Gamma Ray-Neutron Log

FROM-	TO-	TOTAL FEET	FORMATION
Surface	30	30	Carmel
30	536	506	Navajo
536	686	150	Kayenta
686	1090	404	Wingate
1090	1351	261	Chinle
1351	1402	51	Moss Back
1402	1980	578	Moenkopi
1980	2256	276	Sinbad
2256	2369	113	Kalbab
2369	2865	496	Cocconino
2865	4106	1241	Pennsylvanian
4106	4922	816	Mississippian
4922	5052	130	Ouray
5052	5302	250	Elbert
5302	5695	393	Lynch
5695	6031 (TD)	336	Ophir

Well was plugged and abandoned on August 22, 1955 as no commercial shows of oil or gas were encountered during the drilling of this well. All depths being from Kelly bushing which is 12 feet above ground level.

(OVER)




(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Salt Lake City

Lease No. 067193-B

Unit Cedar Mountain

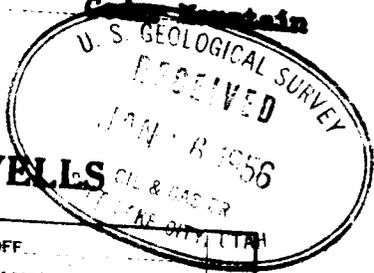

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY
NOTICE OF INTENTION TO ABANDON WELL	

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

August 23

19 55

Well No. 1 is located 2310 ft. from N line and 2310 ft. from W line of sec. 29

NE/4 SE/4 SW/4
(1/4 Sec. and Sec. No.)

T-19-S
(Twp)

R-12-E
(Range)

S1M
(Meridian)

Wildcat
(Field)

Emery
(County or Subdivision)

Utah
(State or Territory)

The elevation of the derrick floor above sea level is 6178 ft.

6167 Ground level

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

A total depth of 6027 feet was reached at 4:00 p.m. August 17, 1955 and drilling was discontinued. No commercial shows of oil or gas were obtained from cuttings or the mud logging unit; neither were any depicted by electric logs. Verbal permission was given by the Salt Lake City, Utah U. S. Geological Survey office to plug and abandon the well. Following are depths and amounts of cement used in plugs: 50 sacks cement from 5895 to 6017 feet, 25 sacks from 4118 to 4180 feet, 25 sacks from 2045 to 2105 feet, 25 sacks from 320 to 370 feet, and 8 sacks in top of surface casing. A sign having the required information will be placed at the well site. The location will be restored to its former status as nearly as possible as soon as the reserve pits have dried sufficiently to back fill. A final report will be submitted when all work is completed.

POOR COPY

July 27, 1965

Reynolds Mining Corporation
606 Melrose Building
Houston 2, Texas

Re: Well No. Cedar Mountain Unit #1
Sec. 29, T. 19 S., R. 12 E.,
Emery County, Utah

Gentlemen:

Upon checking our files we find that we do not have the electric and/or radioactivity logs for the above mentioned well. This well was drilled prior to the establishment of the Commission, however, we are making an attempt to complete our records on wells that have been drilled in the state.

It would be appreciated if you could forward said logs to this office as soon as possible.

Thank you for your assistance in this request.

Very truly yours,

OIL & GAS CONSERVATION COMMISSION

KATHY G. WARNER
RECORDS CLERK

kgw



REYNOLDS MINING CORPORATION

OIL AND GAS DIVISION
ADAMS PETROLEUM CENTER, 6910 FANNIN
HOUSTON, TEXAS 77025
RIVERSIDE 7-7438

September 24, 1965

Ms. Kathy G. Warner
Records Clerk
Oil and Gas Conservation Commission
The State of Utah
348 East South Temple
Suite 301
Salt Lake City, Utah 84111


Re: Cedar Mountain Unit No. 1 Well
Sec. 29, T-19-S, R-12-E
Emery County, Utah.

Dear Ms. Warner:

In reply to your letter of July 27, 1965, I am enclosing the electric log and gamma ray - neutron logs on the above-mentioned well.

Best regards.

Yours very truly,

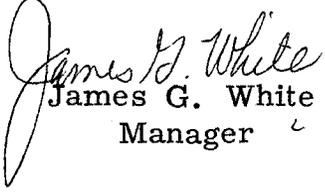
James G. White
Manager

Inw

Enclosures.