

UTAH OIL AND GAS CONSERVATION COMMISSION

REMARKS: WELL LOG ELECTRIC LOGS FILE **X** WATER SANDS LOCATION INSP SUB. REPORT/abd.

DATE FILED **AUGUST 15, 1997**

LAND: FEE & PATENTED STATE LEASE NO. PUBLIC LEASE NO. INDIAN #

DRILLING APPROVED: **JUNE 1, 1998** 14-20-H62-3519

SPUDED IN:

COMPLETED: PUT TO PRODUCING:

INITIAL PRODUCTION:

GRAVITY A.P.I.

GOR: *CONFIDENTIAL*

PRODUCING ZONES:

TOTAL DEPTH:

WELL ELEVATION:

DATE ABANDONED:

FIELD: **ANTELOPE CREEK**

UNIT:

COUNTY: **DUCHESNE**

WELL NO. **UTE TRIBAL 30-13** API NO. **43-013-31930**


LOCATION **390 FSL** FT. FROM (N) (S) LINE. **183 FWL** FT. FROM (E) (W) LINE. **SW SW** 1/4 - 1/4 SEC. **30**

TWP.	RGE.	SEC.	OPERATOR	TWP.	RGE.	SEC.	OPERATOR
				5S	3W	30	PETROGLYPH OPERATING

Petroglyph Operating Co., Inc.
P.O. Box 1839
Hutchinson, KS 67504-1839

July 27, 1997

Utah Division of Oil, Gas, & Mining
1594 West North Temple
Box 145801
Salt Lake City, UT 84114-5801

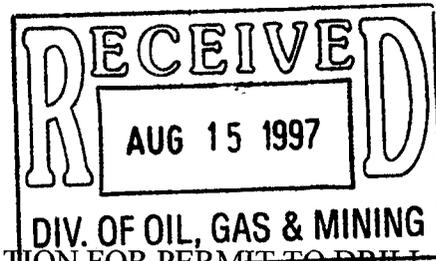

RE: APPLICATION FOR PERMIT TO DRILL
UTE TRIBAL #30-13
SW/SW, SEC. 30, T5S, R3W
DUCHESNE COUNTY, UTAH
LEASE NO. BIA 14-20-H62-3519
UTE TRIBAL LANDS

Enclosed please find a copy of the Application for Permit to Drill and associated attachments for the referenced well.

Please address further communication regarding this matter (including approval) to:

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Phone # (801) 789-4120
Fax # (801) 789-1420

Sincerely,

A handwritten signature in black ink, appearing to read "Ed Trotter".

Ed Trotter
Agent

Petroglyph Operating Co., Inc.

Attachments

/EHT/dmt

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK
DRILL DEEPEN

b. TYPE OF WELL
OIL WELL GAS WELL OTHER SINGLE ZONE MULTIPLE ZONE

2. NAME OF OPERATOR
PETROGLYPH OPERATING COMPANY, INC.

3. ADDRESS AND TELEPHONE NO.
P.O. BOX 607, ROOSEVELT, UTAH 84066

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*)
At surface
390' FSL & 183' FWL SW/SW
At proposed prod. zone

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE
20.1 MILES SOUTHWEST OF MYTON, UTAH

15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any)
183'

16. NO. OF ACRES IN LEASE
640

17. NO. OF ACRES ASSIGNED TO THIS WELL
80

18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT.

19. PROPOSED DEPTH
5559'

20. ROTARY OR CABLE TOOLS
ROTARY

21. ELEVATIONS (Show whether DF, RT, GR, etc.)
6208.6' GRADED GROUND

22. APPROX. DATE WORK WILL START*
AUGUST 1997

5. LEASE DESIGNATION AND SERIAL NO.
14-20-H62-3519

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
UTE INDIAN TRIBE

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME, WELL NO.
UTE TRIBAL

9. API WELL NO.
#30-13

10. FIELD AND POOL, OR WILDCAT
ANTELOPE CREEK

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
SEC. 30, T5S, R3W

12. COUNTY OR PARISH
DUCHESNE

13. STATE
UTAH

CONFIDENTIAL


PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4	8 5/8	24.0#	250'	135 sx class "G" + 2% CaCl ₂ + 1/4 #/sx celloflake. 50/50 POZMIX + 2% GEL + 10% SALT TO 400' ABOVE ALL ZONE OF INTEREST (+ 10% EXCESS). LIGHT CEMENT (11 PPG+) + LCM TO 200' ABOVE OIL SHALE OR FRESH WATER INTERVALS (+ 5% EXCESS).
7 7/8	5 1/2	15.5#	5559'	

CONFIDENTIAL

PETROGLYPH OPERATING COMPANY, INC. WILL BE THE DESIGNATED OPERATOR OF THE SUBJECT WELL UNDER BOND #4556.

pc: Utah Division of Oil, Gas, and Mining
Bureau of Indian Affairs, Fort Duchesne, Utah
Ute Tribe, Fort Duchesne, Utah

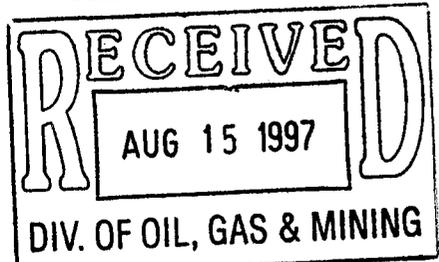

23. IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

SIGNED: *[Signature]* TITLE: AGENT FOR PETROGLYPH DATE: 7-27-97

(This space for Federal or State office use)

PERMIT NO. 43-013-31930 APPROVAL DATE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

CONDITIONS OF APPROVAL, IF ANY: Federal Approval of this Action is Necessary

APPROVED BY: *[Signature]* TITLE: BRADLEY G. HILL RECLAMATION SPECIALIST III DATE: 6/1/98


*See Instructions On Reverse Side

PETROGLYPH OPERATING CO., INC.

Well Location, UTE TRIBAL #30-13, located as shown in SW 1/4 SW 1/4 of Section 30, T5S, R3W, U.S.B.&M. Duchesne County, Utah.


T5S, R3W, U.S.B.&M.

1 1/2" Galv. Cap
Set Marked Stone,
Steel Post & Pile
of Stones

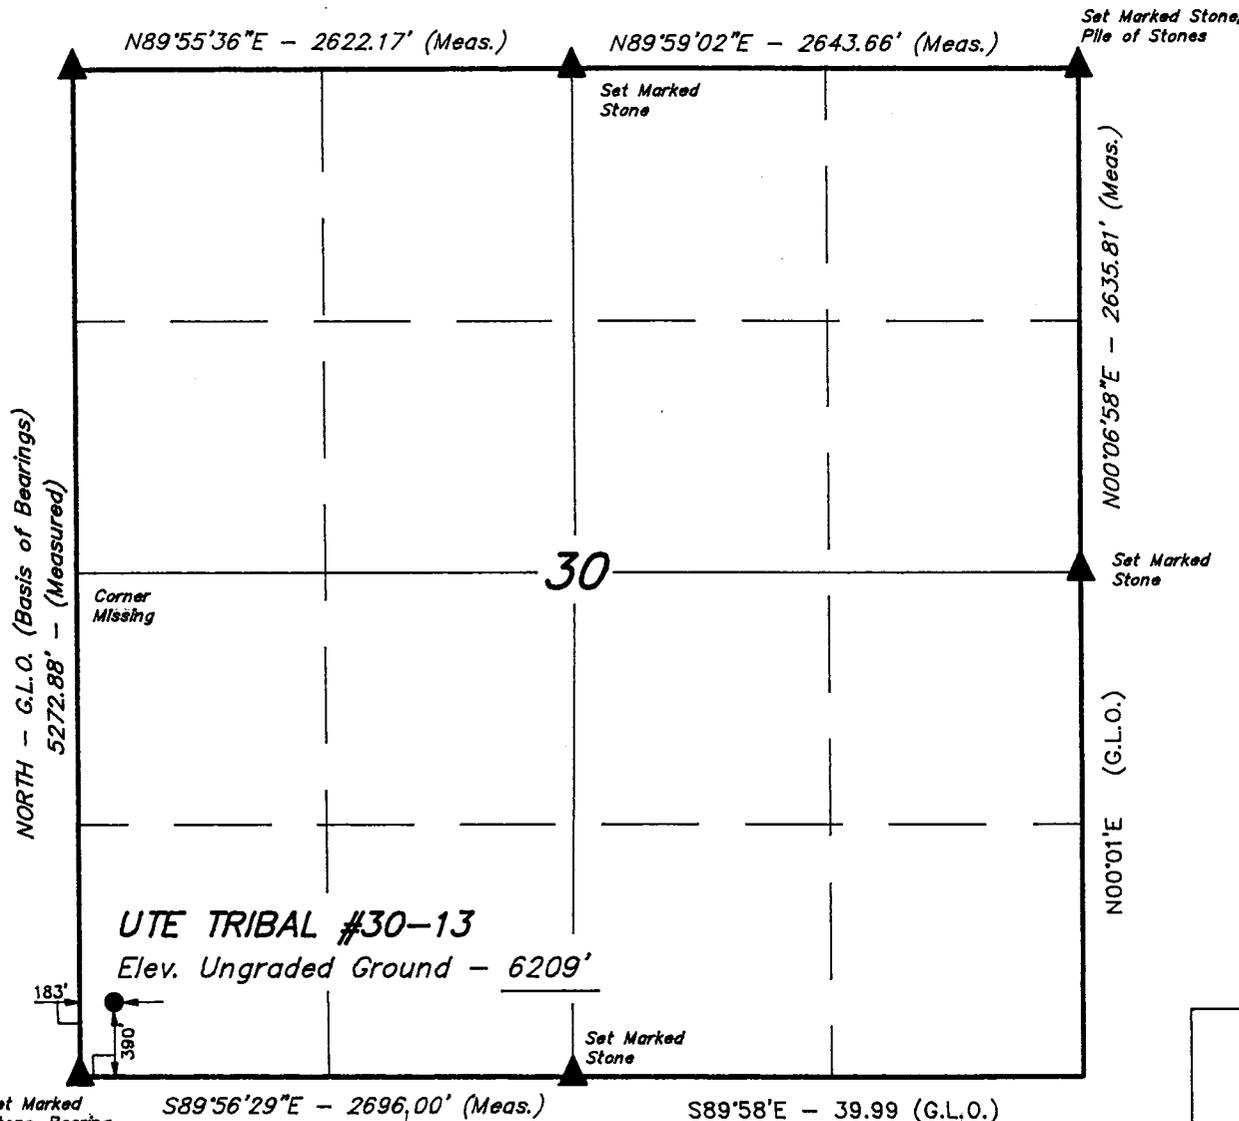

BASIS OF ELEVATION


SPOT ELEVATION AT THE NORTHWEST CORNER OF SECTION 30, T5S, R3W, U.S.B.&M. TAKEN FROM THE DUCHESNE SE QUADRANGLE, UTAH, DUCHESNE COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 6116 FEET.

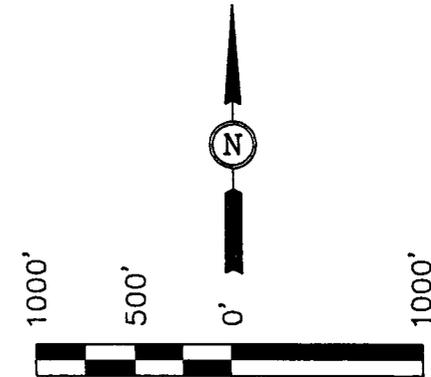

SCALE

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

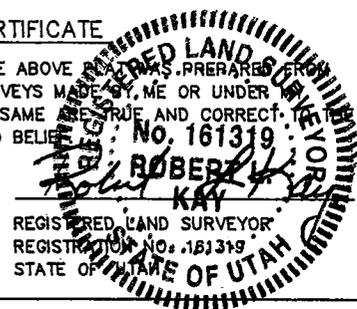

UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (801) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 5-20-97	DATE DRAWN: 5-20-97
PARTY D.A. G.S. C.B.T.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE PETROGLYPH OPERATING CO., INC.	

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

MISSION OIL CORPORATION

418 17TH STREET #3178 DENVER, COLORADO 80202
(303) 556-8664 FAX 556-2664

May 29, 1997


Petroglyph Operating Company, Inc.
P.O. Box 1839
Hutchinson, Kansas 67504-1839

Attn: Ralph L. Nelms

Re: Ute Tribal #30-13
Sec 30 T5S, R3W
Duchesne County, Utah

Gentlemen:

Pursuant to your request of May 21 regarding an exception location, please be advised that Mission hereby approves the location as set forth in said letter:

Yours truly

Philip Shepardson
G.M.

RECEIVED JUN - 2 1997

EIGHT POINT PLAN

UTE TRIBAL #30-13
SW/SW, SEC. 30, T5S R3W
DUCHESNE COUNTY, UTAH

1. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:

FORMATIONS	DEPTH	SUBSEA
Mahogany Shale	2419	3800
"X" Marker	3954	2265
Douglas Creek	4102	2117
"B" Limestone	4474	1745
B/Castle Peak Limestone	5006	1213
Basal Carbonate Limestone	5449	770
Total Depth	5559	660

Anticipated BHP 2000 psi

2. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS FORMATIONS:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>	<u>Subsea</u>
Oil/Gas	Douglas Creek	4102	2117
Oil/Gas	B/Castle Peak	5006	1213
Other mineral zones	N/A		

3. PRESSURE CONTROL EQUIPMENT : BOP Schematic Diagram attached.

4. CASING PROGRAM :

<u>HOLE SIZE</u>	<u>INTERVAL</u>	<u>LENGTH</u>	<u>SIZE</u>	<u>WEIGHT</u>	<u>GRADE</u>	<u>MINIMUM SAFETY FACTOR</u>		
						<u>COLLAPSE</u>	<u>BURST</u>	<u>TENSILE</u>
12 1/4	0' - 250'	250'	8 5/8	24.0 #	J-55	1370 PSI	2950 PSI	263,000#
7 7/8	0' - 5559'	5559'	5 1/2	15.5 #	M-50	3650 PSI	4550 PSI	186,000#

All casing will be new or inspected.

EIGHT POINT PLAN

UTE TRIBAL #30-13
SW/SW, SEC. 30, T5S R3W
DUCHESNE COUNTY, UTAH

5. MUD PROGRAM

<u>INTERVAL</u>	<u>MUD TYPE</u>
0' - 250'	Air
250' - 4000'	Air/Mist & Aerated Water
4000' - TD	Air/3% KCL water or KCL substitute
TD	Gel/polyacrylamide polymer w/5-10% LCM

Sufficient mud inventory will be maintained on location during drilling to handle any adverse conditions that may arise.

6. VARIANCE REQUESTS:

- A. Petroglyph Operating Co., Inc. requests a variance to regulations requiring a straight run blooie line.
- B. Petroglyph Operating Co., Inc. requests a variance to regulations requiring an automatic ignitor or continuous pilot light on the blooie line.

7. EVALUATION PROGRAM:

Logs: Mud Logging	T.D. to base of surface csg.
Compensated Density-Compensated Neutron Log	T.D. to base of surface csg.
Dual Laterolog - Micro-SFL	T.D. to base of surface csg.
Numar (Magnetic Resonance Imaging Log)	@ Geologists discretion

Cores: None Programmed
DST: None Programmed

Completion: To be submitted at a later date.

8. ABNORMAL CONDITIONS:

None anticipated.

EIGHT POINT PLAN

UTE TRIBAL #30-13
SW/SW, SEC. 30, T5S R3W
DUCHESNE COUNTY, UTAH

9. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

10. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.


(Attachment: BOP Schematic Diagram)

2000 PSIG DIAGRAM

BOTH RAMS ARE 2000 PSIG RATED.
CASING FLANGE IS 9" 2000 PSIG RATED.
BOPE 9" 2000 PSIG

TESTING PROCEDURE:

1. BOPE 's will be tested with a professional tester to conform to Onshore Order #2 with retest every 14 days.
2. Blind rams will be tested to rated working pressure, 2000 psig
3. Casing will be tested to 0.22 psi/ft. or 1500 psig. Not to exceed 70% of burst strength, whichever is greater.
4. All lines subject to well pressure will be pressure tested to the same pressure as blind & pipe rams.
5. All BOPE specifications and configurations will meet Onshore Order #2 requirements for 2000 psig BOPE specifications.

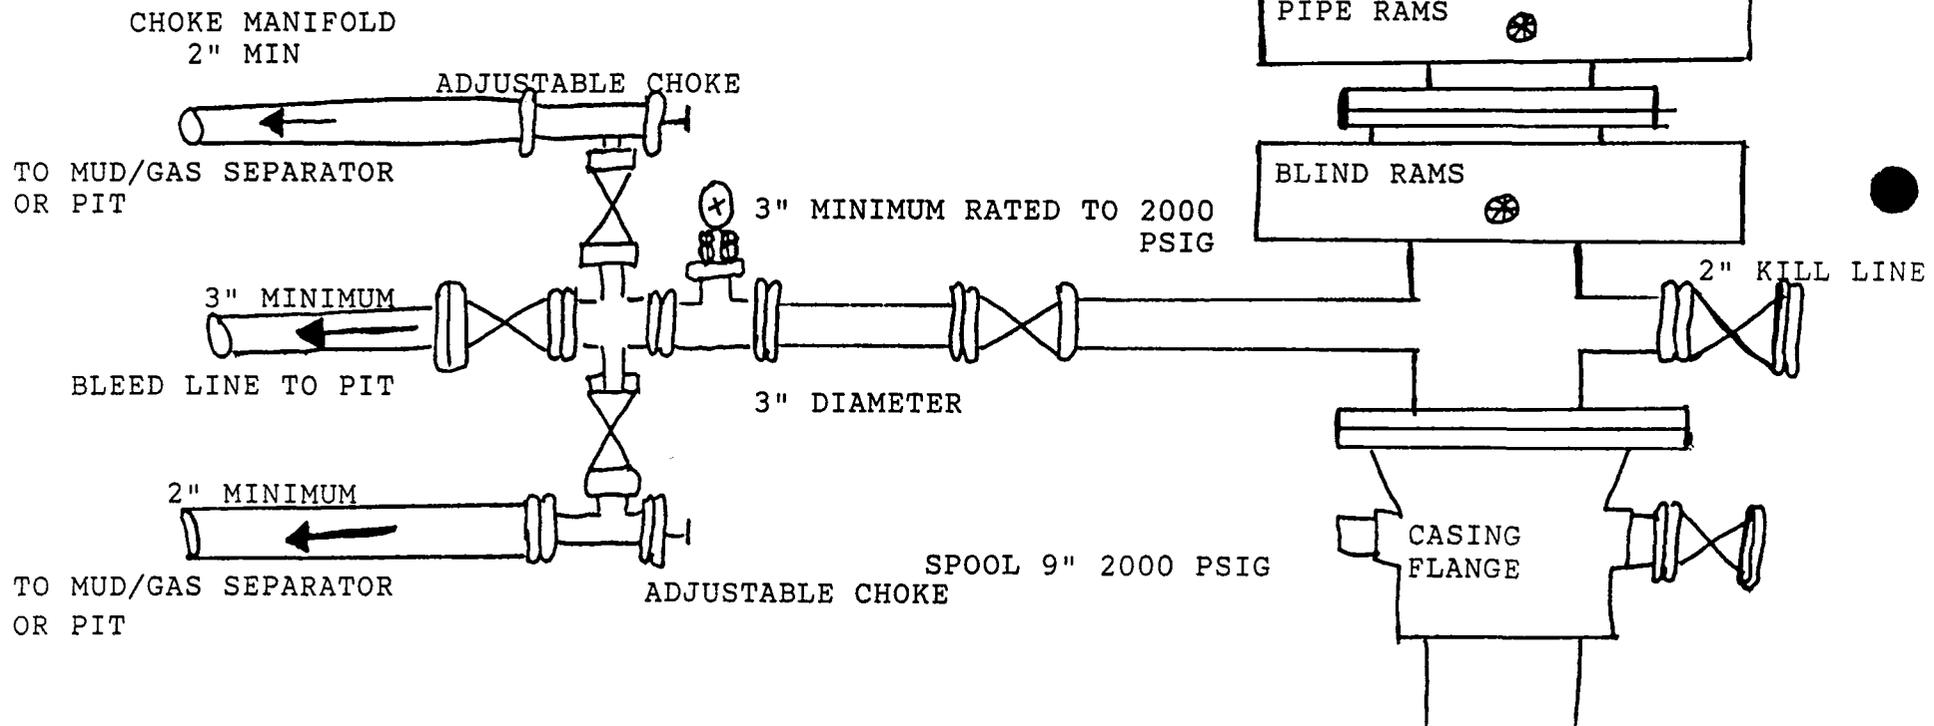

CONDITIONS OF APPROVAL
FOR THE SURFACE USE PROGRAM OF THE
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Petroglyph Operating Co., Inc.
Well Name & Number: Ute Tribal #30-13
Lease Number: BIA 14-20-H62-3519
Location: 390' FSL & 183' FWL SW/SW, Sec. 30, T5S R3W
U.S.B.&M., Duchesne County, Utah
Surface Ownership: Ute Indian Tribe

NOTIFICATION REQUIREMENTS

Location Construction - forty-eight (48) hours prior to construction of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice - at least twenty-four (24) hours prior to spudding the well.

Casing String and Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.

BOP and related Equipment Tests - twenty-four (24) hours prior to running casing and tests.

First Production Notice - within five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice To Drill and Surface Use Program.

THIRTEEN POINT SURFACE USE PROGRAM

1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing road.
- B. The proposed well site is located approximately 20.1 miles southwest of Myton, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

2. PLANNED ACCESS ROAD

- A. The access road will be approximately 200 feet in length. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/18 foot running surface.
- C. Maximum grade on access road will be 8%
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No culverts, bridges or major cuts & fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

All travel will be confined to existing access road Right-of-Way. Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service Publication: Surface Operating Standards For Oil & Gas Exploration and Development, (1989).

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the

roadbed as necessary to provide a well-constructed safe road.

Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of- Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, Petroglyph Operating Co., Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

3. LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION

- A. Water wells - 1*
- B. Abandoned wells - 1*
- C. Temporarily abandoned wells - None.
- D. Disposal wells - None.
- E. Drilling wells - None.
- F. Producing wells - 3*
- G. Shut in wells - 1*
- H. Injection wells - 1*

(*See attached TOPO map "C" for location)

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

A. ON WELL PAD

- 1. Tank batteries - None
- 2. Production facilities-To be submitted later
- 3. Oil gathering lines - None

4. Gas gathering lines-None
5. Injection lines - None
6. Disposal lines - None
7. Surface pits - None

B. OFF WELL PAD

1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
2. A 4 1/2" OD steel above ground production pipeline will be laid approximately 30' from proposed location to a point in the SW/SW of Section 30, T5S, R3W, where it will tie into Petroglyph Operating Co., Inc.'s existing pipeline. Proposed pipeline crosses Ute Tribe lands, thus a Right-of-Way grant will be required. See attached TOPO Map D showing pipeline route.
3. Proposed pipeline will be a 4 1/2" OD steel, welded line laid on the surface.
4. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery, unless more stringent protective requirements are deemed necessary by the authorized officer.

The production facilities will be placed on the Southwest side of the location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities required will be painted within 6 months of installation. Facilities required to comply with O.S.H.A.

(Occupational Safety and Health Act) will be excluded.
The required paint color is Desert Brown.

5. LOCATION & TYPE OF WATER SUPPLY

- A. Water supply will be from Target Trucking's Roosevelt Brine Storage and/or Target's water source in SE 1/4, Sec. 1, T 4S, R 5W Duchesne County, Utah (State water right #43-10152). All water will come from a non-depletable source.
- B. Water will be hauled by Target Trucking.
- C. No water well will be drilled on lease.

6. SOURCE OF CONSTRUCTION MATERIAL

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of location.
- B. All construction material will come from Ute Tribal Land.
- C. No mineral materials will be required.

7. METHODS OF HANDLING WASTE DISPOSAL

A. METHODS AND LOCATION

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at an approved waste disposal facility.
- 4. Produced waste water will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. During the 90 day period, an application for approval of a permanent disposal method and location, together with the required water analysis, will be submitted for the AO's approval.

5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on drilling rig to avoid leakage of oil to pit.

B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to reserve pit will be avoided by flaring them off in flare pit at time of recovery.

Burning of trash will not be allowed. All trash must be contained in a trash cage and hauled away to an approved disposal site at the completion of the drilling activities.

On BIA administered land:

All reserve pits will be lined with either native clay, commercial bentonite or plastic sufficient to prevent seepage. (If a plastic nylon reinforced liner is used, it shall be torn and perforated after the pit dries and before backfilling of the reserve pit).

A 12 mill liner shall be installed in the reserve pit.

___ To protect the environment:

If the reserve pit is lined the operator will provide the BIA with a chemical analysis of the fluids in that pit no later than 90 days after the well completion to determine the method for final reclamation of the reserve pit. If the elemental concentrations shown by the chemical analysis exceeds the requirements described by part II, Standards of Quality for Waters of the State, Wastewater Disposal Regulations, State of Utah Division of Health, the contents and liner will be removed and disposed of at an authorized disposal site.

___ To protect the environment (without a chemical analysis)
reserve pits will be constructed so as not to leak, break, or allow discharge of liquids.

___ Storage tanks will be used if drill sites are located on tribal

irrigable land, flood plains, or on lands under crop production.

After first production, produced waste water will be confined to a lined pit or storage tank for a period not to exceed ninety (90) days. During the 90 day period, in accordance with NTL-2B, an application for approval of a permanent disposal method and location, along with required water analysis, shall be submitted for the AO's approval. Failure to file an application within the time allowed will be considered an incident of noncompliance.

8. ANCILLARY FACILITIES

- A. No airstrips or camps are planned for this well.

9. WELL SITE LAYOUT

- A. Refer to attached well site plat for related topography cuts and fills & cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation parking areas, and access road.

The reserve pit will be located on the Northeast side of the location.

The flare pit will be located downwind of the prevailing wind direction on the Northeast side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled topsoil will be stored on the South end.

Access to the well pad will be from the North.

N/A Diversion ditch(es) shall be constructed on the _____ side of the location (above/below) the cut slope, draining to the _____

N/A Soil compacted earthen berm(s) shall be placed on the _____ side(s) of the location between the _____

N/A The drainage(s) shall be diverted around the sides of the well pad location.

N/A The reserve pit and/or pad locations shall be constructed long and narrow for topographic reasons _____

X Corner No. 8 will be rounded off to minimize excavation.

FENCING REQUIREMENTS

All pits will be fenced according to the following minimum standards:

- A. 39 inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16'.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BIA or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is to be regularly travelled. If the well is a producer, the cattleguards (shall/ shall not) be permanently mounted on concrete bases. Prior to a new road, crossing any fence located on federal land, or any fence between federal land and private land, the operator will contact the BIA, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to

satisfy himself/herself that the fence is adequately braced and tied off.

10. PLANS FOR RESTORATION OF SURFACE

A. PRODUCING LOCATION

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 120 days from the date of well completion (weather permitting). Before any dirt work takes place, the reserve pit will be completely dry and all cans, barrels, pipe, fluid, and hydrocarbons, will be removed.

Contact appropriate surface management agency for required seed mixture.

B. DRY HOLE/ABANDONED LOCATION

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and BIA will attach the appropriate surface rehabilitation conditions of approval.

ON BIA Administered lands:

Abandoned well sites, roads, or other disturbed areas will be restored to near their original condition. This procedure will include: (a) reestablishing irrigation systems where applicable, (b) reestablishing soil conditions in irrigated fields in such a way as to ensure cultivation and harvesting of crops and, (c) ensuring revegetation of the disturbed areas to the specifications of the Ute Indian Tribe or the BIA at the time of abandonment.

11. SURFACE OWNERSHIP

Access road: Ute Indian Tribe

Location: Ute Indian Tribe

12. OTHER INFORMATION

- A. Petroglyph Operating Co., Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:
-whether the materials appear eligible for the National Register of historic Places;

the mitigation measures the operator will likely have to undertake before the site can be used.

-a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

- B. As operator, Petroglyph Operating Co., Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BIA,

or the appropriate County Extension Office. On BIA administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.

- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on Tribal Lands after the conclusion of drilling operations or at any other time without BIA authorization. However, if BIA authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

On BIA administered land:

Operator's employees, including subcontractors, will not gather firewood along roads constructed by operators. If wood cutting is required, a permit will be obtained from the Forestry Department of the BIA pursuant to 25 CFR 169.13 "Assessed Damages Incident to Right-of-Way authorization". All operators, subcontractors, vendors, and their employees or agents may not disturb saleable timber (including firewood) without a duly granted wood permit from the BIA Forester.

If the surface rights are owned by the Ute Indian Tribe and mineral rights are owned by another entity, an approved right-of-way will be obtained from the BIA before the operator begins any construction activities. If the surface is owned by another entity and the mineral rights are owned by the Ute Indian Tribe, rights-of-way will be obtained from the other entity.

All roads constructed by operators on the Uintah and Ouray Indian Reservation will have appropriate signs. Signs will be neat and of sound construction. They will state: (a) that the land is owned by the Ute Indian Tribe, (b) the name of the operator, (c) that firearms are prohibited to all non-Ute Tribal members (d) that permits must be obtained from the BIA before cutting firewood or other timber products, and (e) only authorized personnel permitted. All well site locations on the Uintah and Ouray Indian Reservation will have an appropriate sign indicating the name of the operator,

the lease serial number, the well name and number, the survey description of the well (either footage or the quarter-quarter section, the section, township, and range).

Additional Surface Stipulations

N/A No construction or drilling activities shall be conducted between _____ and _____ because of _____

N/A No surface occupancy will be allowed within 1,000 feet of any sage grouse strutting ground.

N/A No construction or exploration activities are permitted within 1.5 mile radius of sage grouse strutting grounds from April 1 to June 30.

N/A There shall be no surface disturbance within 600 feet of live water (includes stock tanks, springs, and guzzlers).

N/A No cottonwood trees will be removed or damaged.

N/A Pond will be constructed according to BLM specifications approximately _____ ft. _____ of the location, as flagged on onsite.

LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION

PERMITTING

Ed Trotter
1620 West 750 North
Vernal UT 84078
Telephone # (801)789-4120
Fax # (801) 789-1420

OPERATIONS

Vince Guinn
P.O. Box 607
Roosevelt, UT 84066
(801) 722-2531
Fax # (801) 722-9145

All lease/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. Petroglyph Operating Co., Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.

The BIA Office shall be notified upon site completion prior to moving on the drilling rig.

Certification:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in the Plan are to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Petroglyph Operating Co., Inc. and its contractors and sub-contractors in conformity with this Plan and the terms and conditions under which it is approved.



7-27-97
Date




PETROGLYPH OPERATING CO., INC.

TYPICAL CROSS SECTIONS FOR


UTE TRIBAL #30-13
SECTION 30, T5S, R3W, U.S.B.&M.
390' FSL 183' FWL




DATE: 5-30-97
Drawn By: C.B.T.

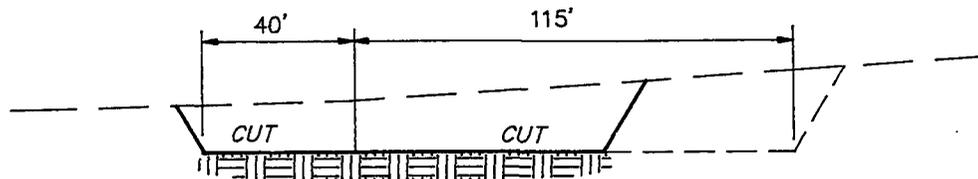


STA. 2+90

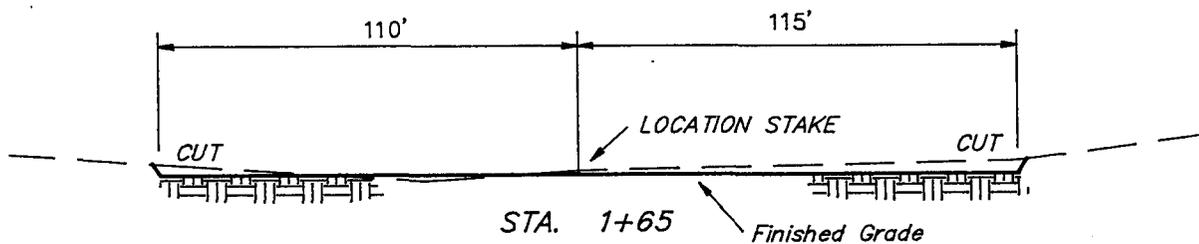

STA. 1+65

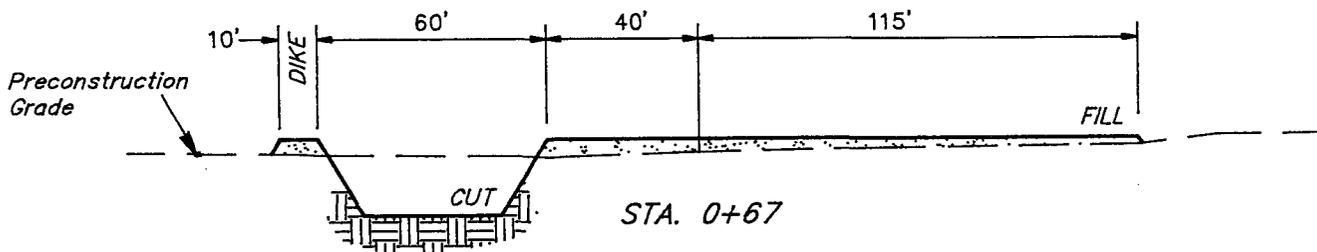

STA. 0+67

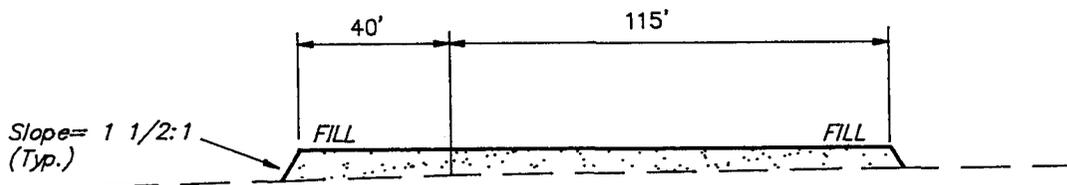

STA. 0+00

NOTE:


Topsoil should not be Stripped Below Finished Grade on Substructure Area.

APPROXIMATE YARDAGES

(12") Topsoil Stripping	= 1,910 Cu. Yds.
Remaining Location	= 3,130 Cu. Yds.
TOTAL CUT	= 5,040 CU.YDS.
FILL	= 2,090 CU.YDS.

EXCESS MATERIAL AFTER 5% COMPACTION	= 2,840 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 2,610 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 230 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (801) 789-1017

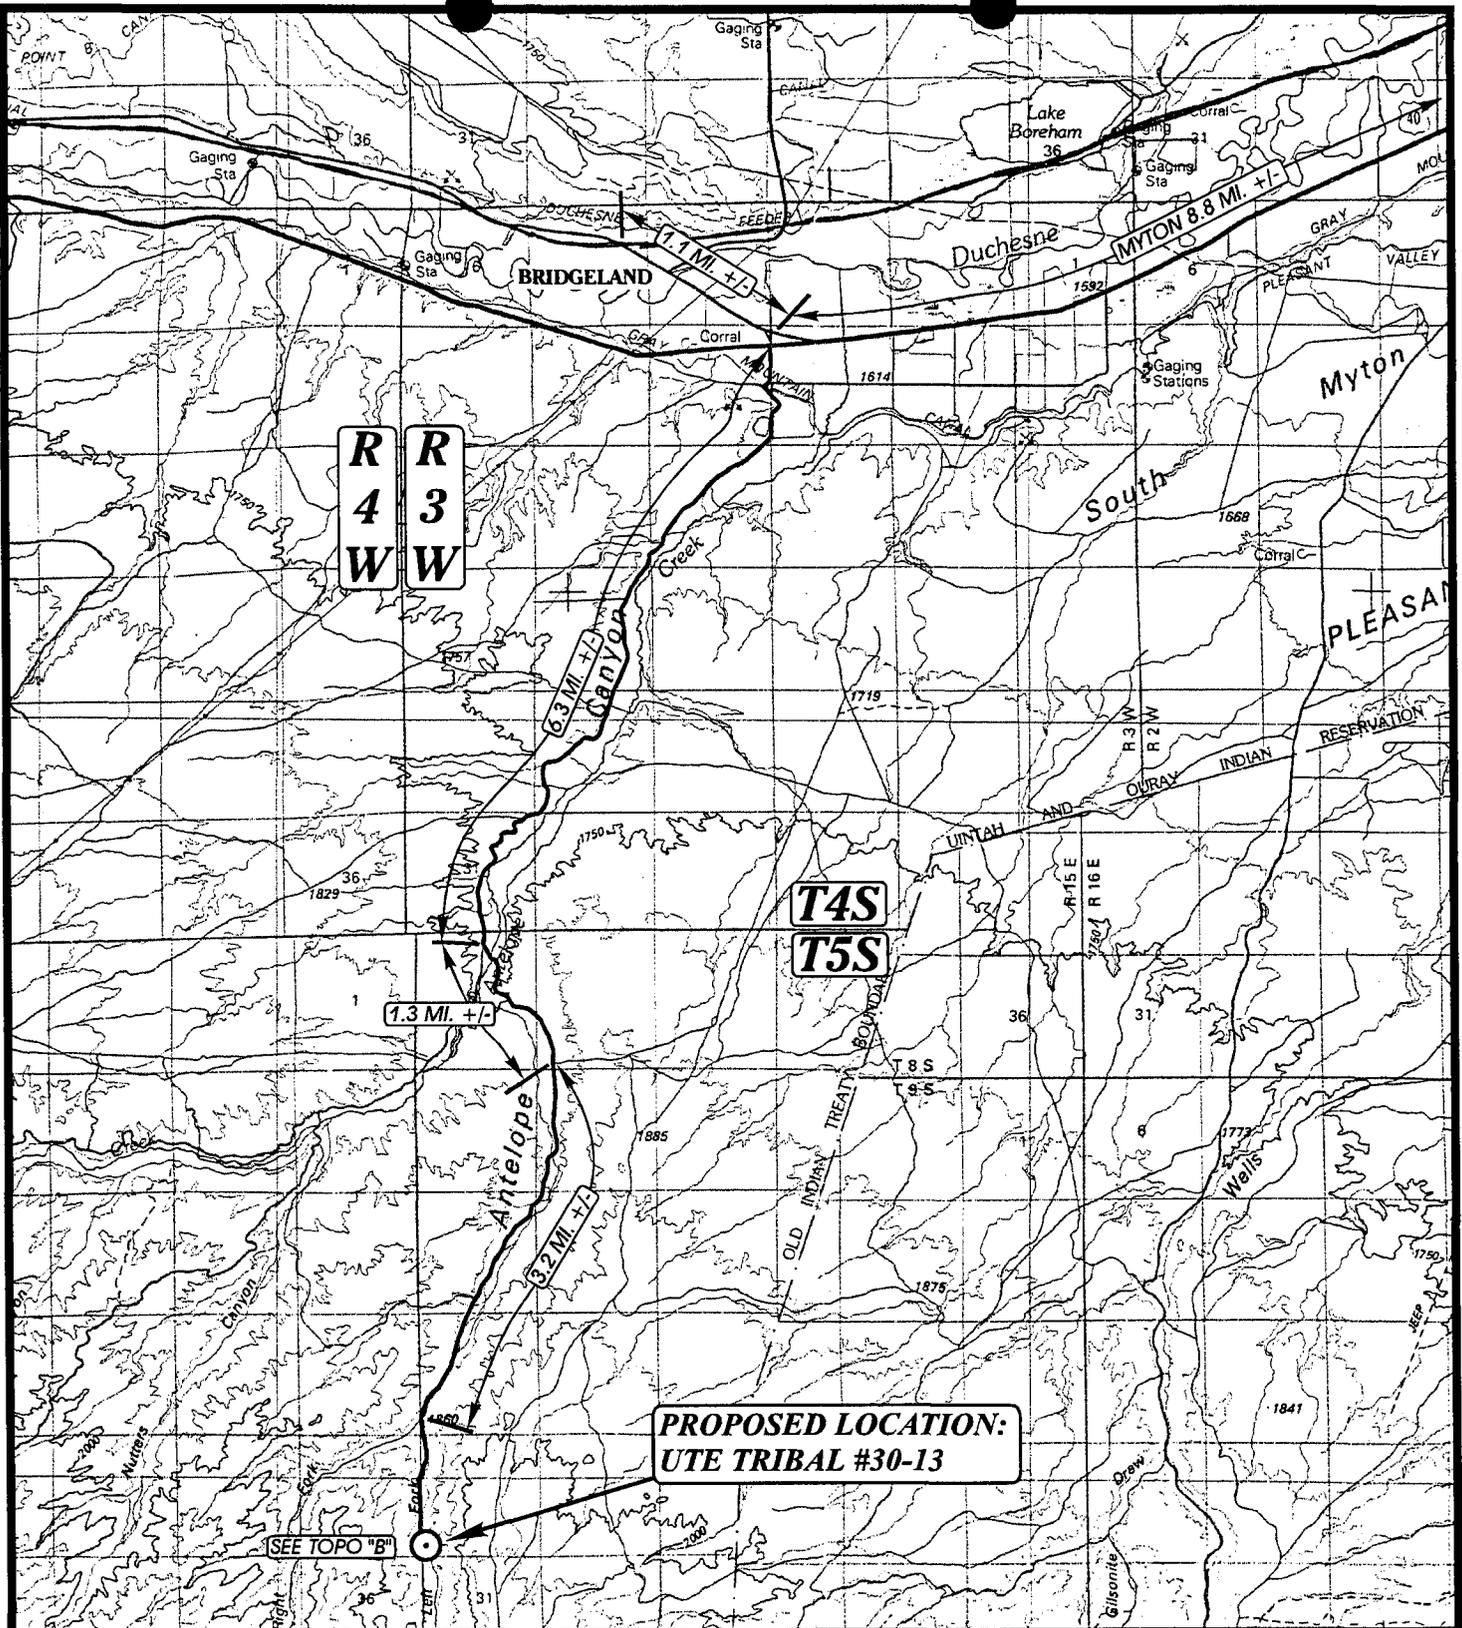

LEGEND:

⊙ PROPOSED LOCATION



PETROGLYPH OPERATING CO., INC.


UTE TRIBAL #30-13
SECTION 30, T5S, R3W, U.S.B.&M.
390' FSL 183' FWL



Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (801) 789-1017 * FAX (801) 789-1018
 Email: uels@easilink.com

TOPOGRAPHIC **5 22 97**
MAP MONTH DAY YEAR
 SCALE: 1:100,000 DRAWN BY: D.COX REVISED: 00-00-00



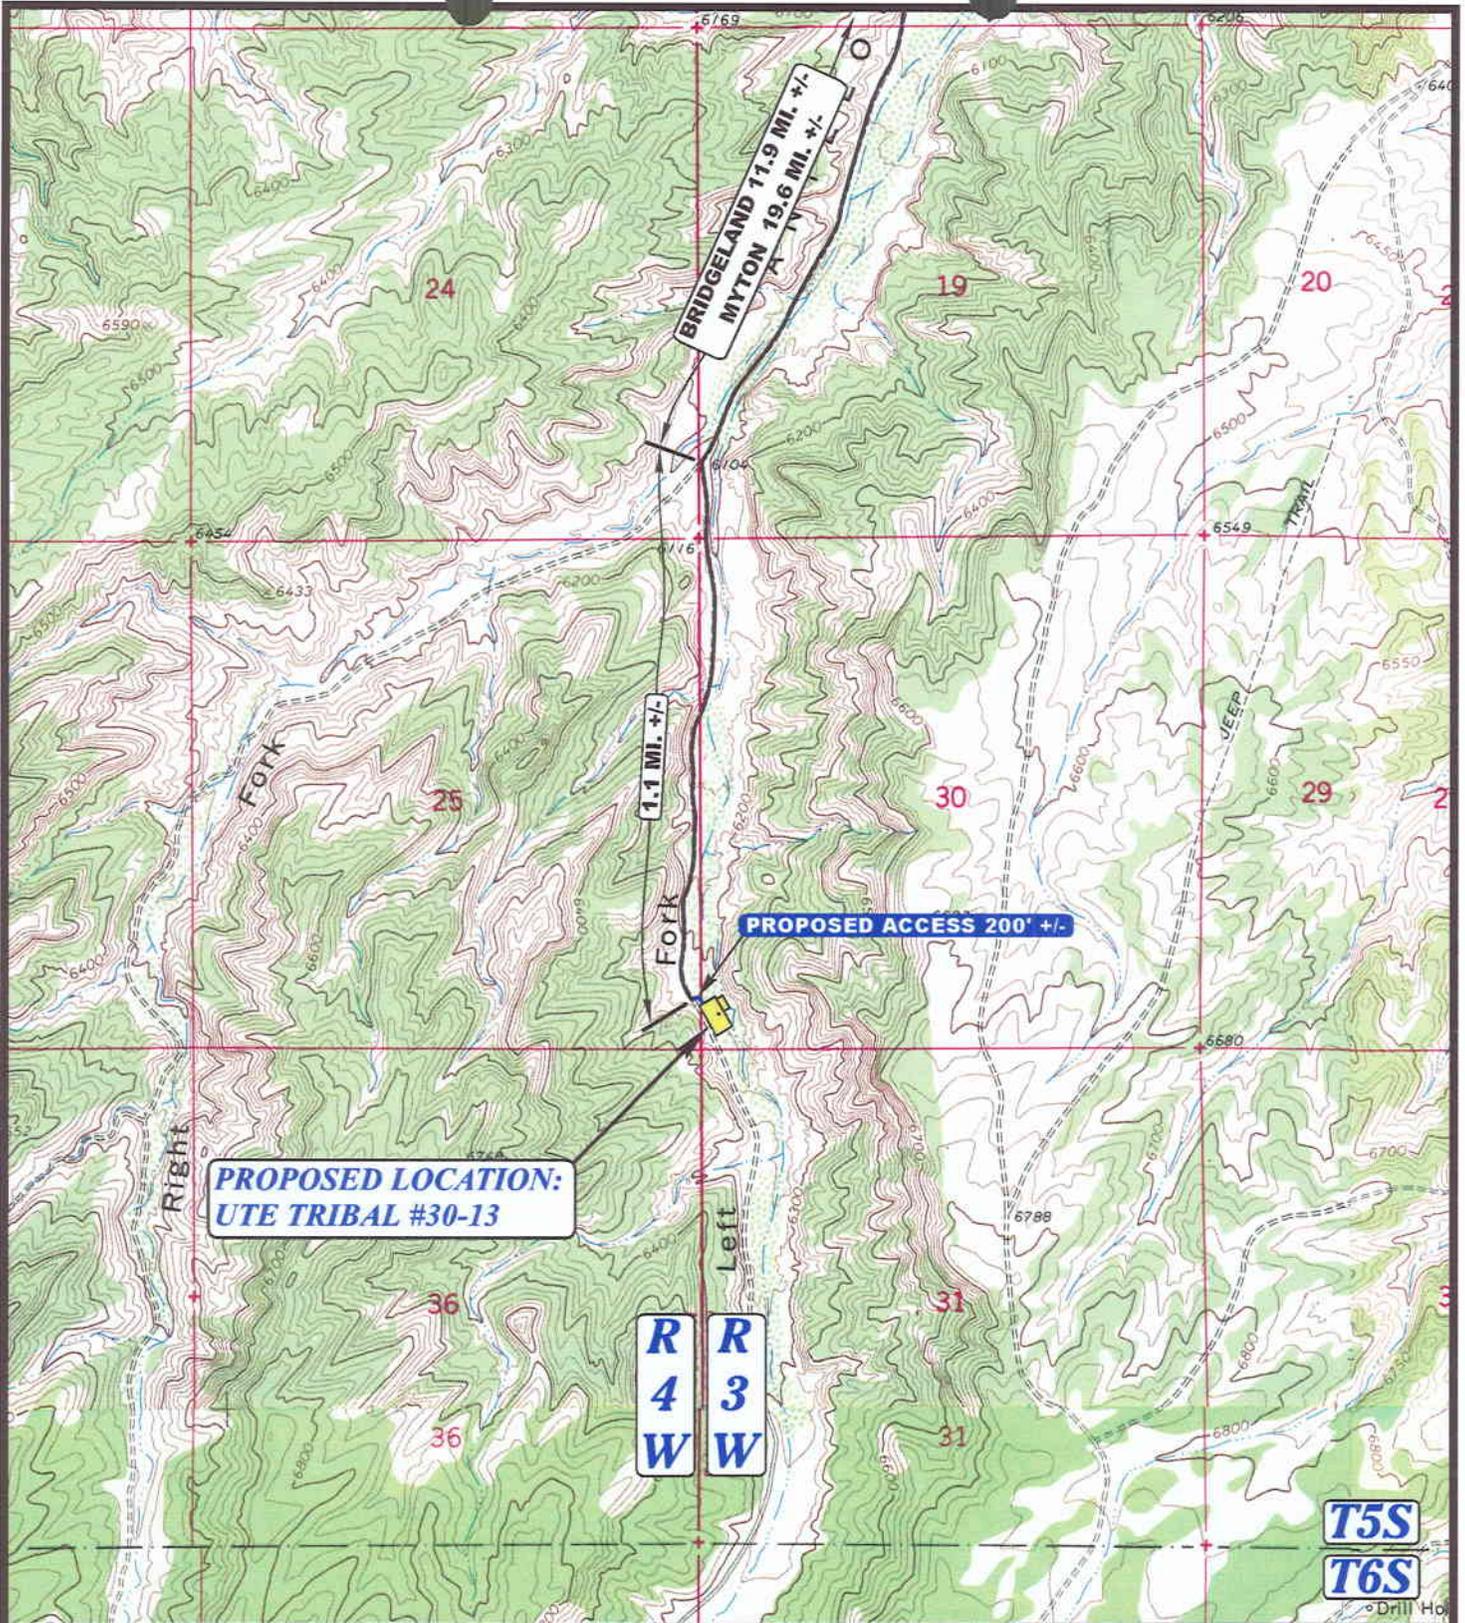

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING ROAD




PETROGLYPH OPERATING CO., INC.

UTE TRIBAL #30-13
SECTION 30, T5S, R3W, U.S.B.&M.
390' FSL 183' FWL

U E L S
Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (801) 789-1017 * FAX (801) 789-1018
 Email: uels@easilink.com

TOPOGRAPHIC **5 22 97**
MAP MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: D.COX REVISED: 00-00-00



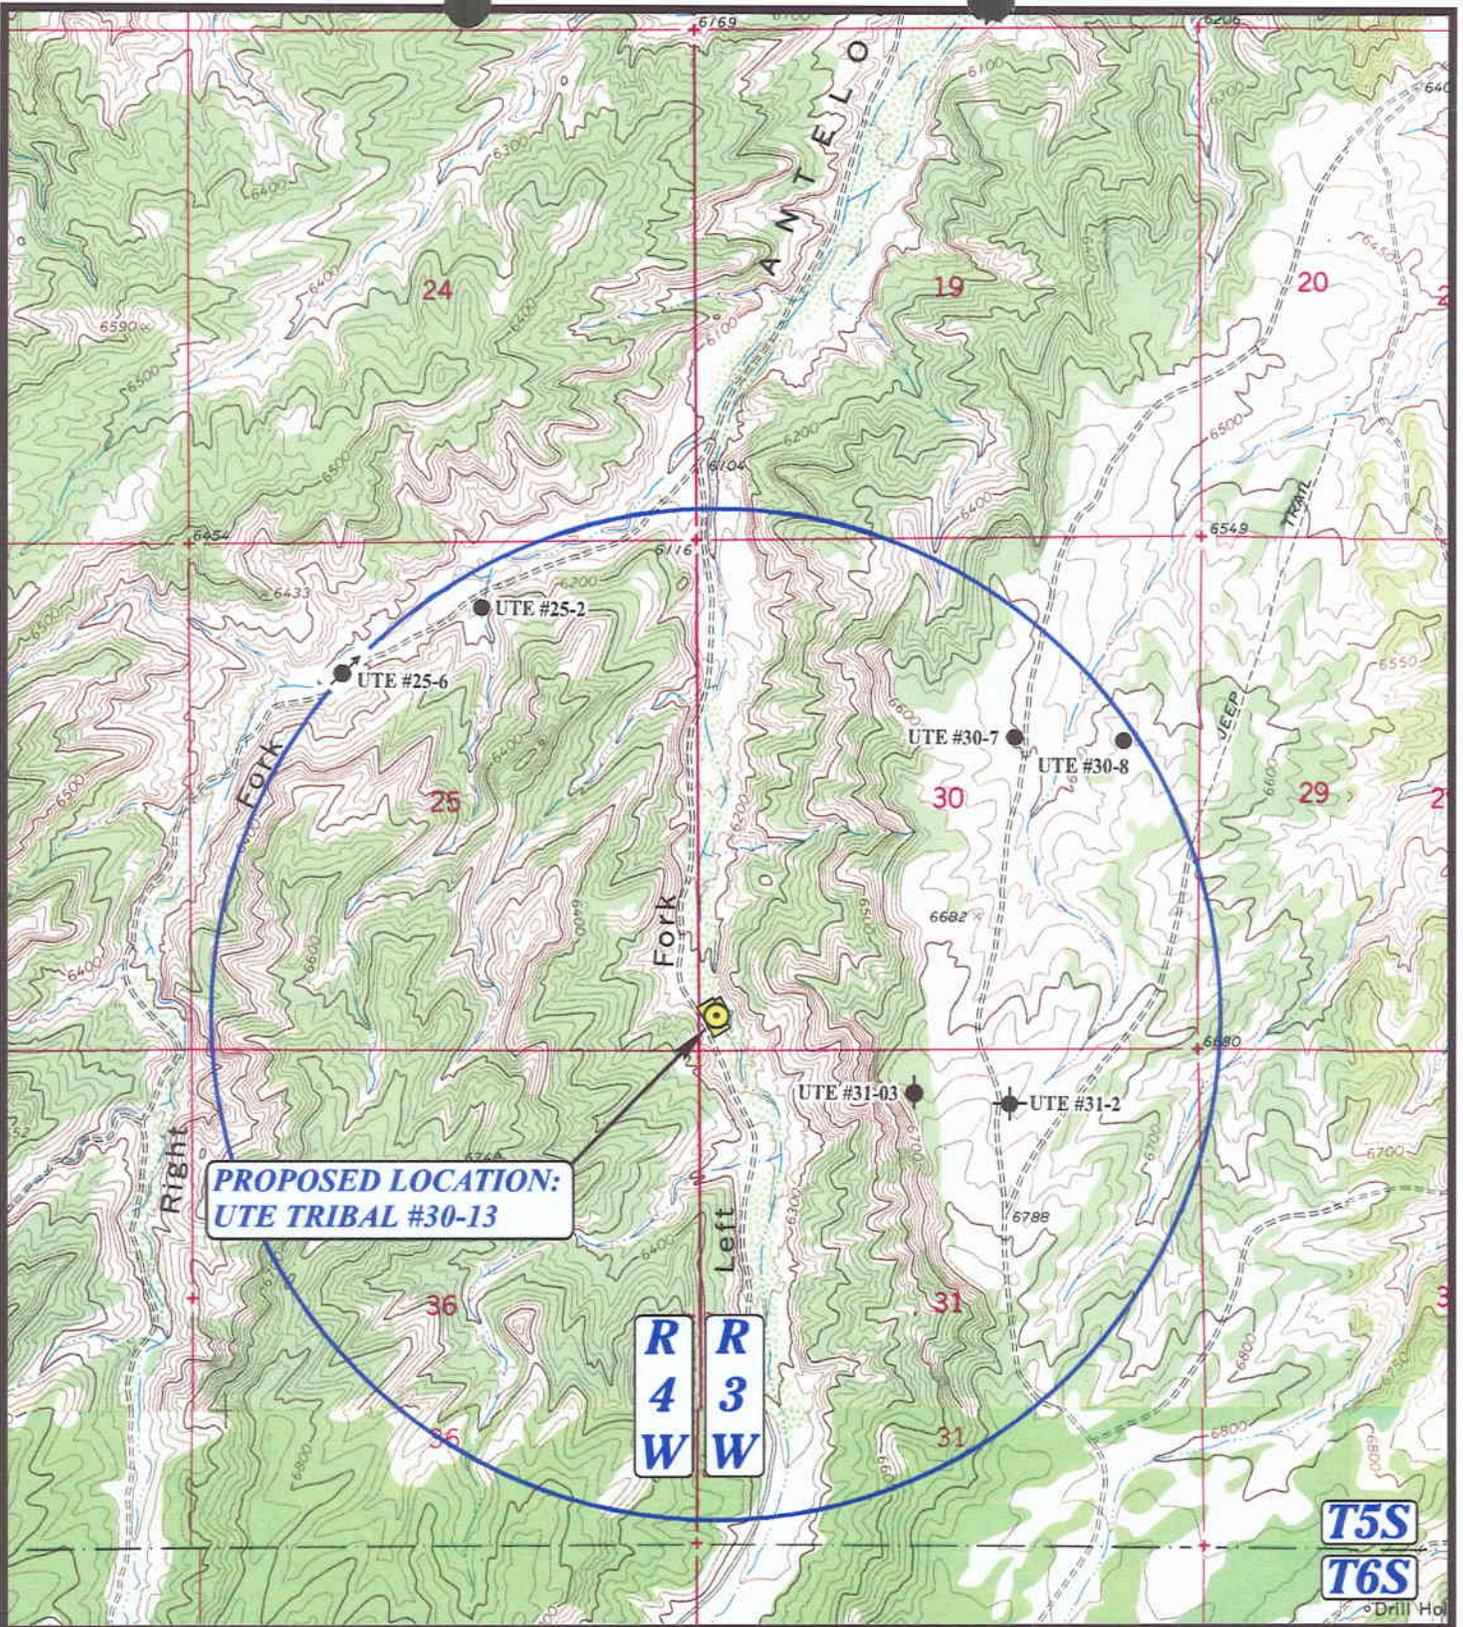

**PROPOSED LOCATION:
UTE TRIBAL #30-13**

**R
4
W** **R
3
W**

**T5S
T6S**

LEGEND:

- ∅ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ∅ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

PETROGLYPH OPERATING CO., INC.

**UTE TRIBAL #30-13
SECTION 30, T5S, R3W, U.S.B.&M.
390' FSL 183' FWL**



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(801) 789-1017 * FAX (801) 789-1018
Email: uels@easilink.com




**TOPOGRAPHIC
MAP**

5 22 97
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: D.COX REVISED: 00-00-00



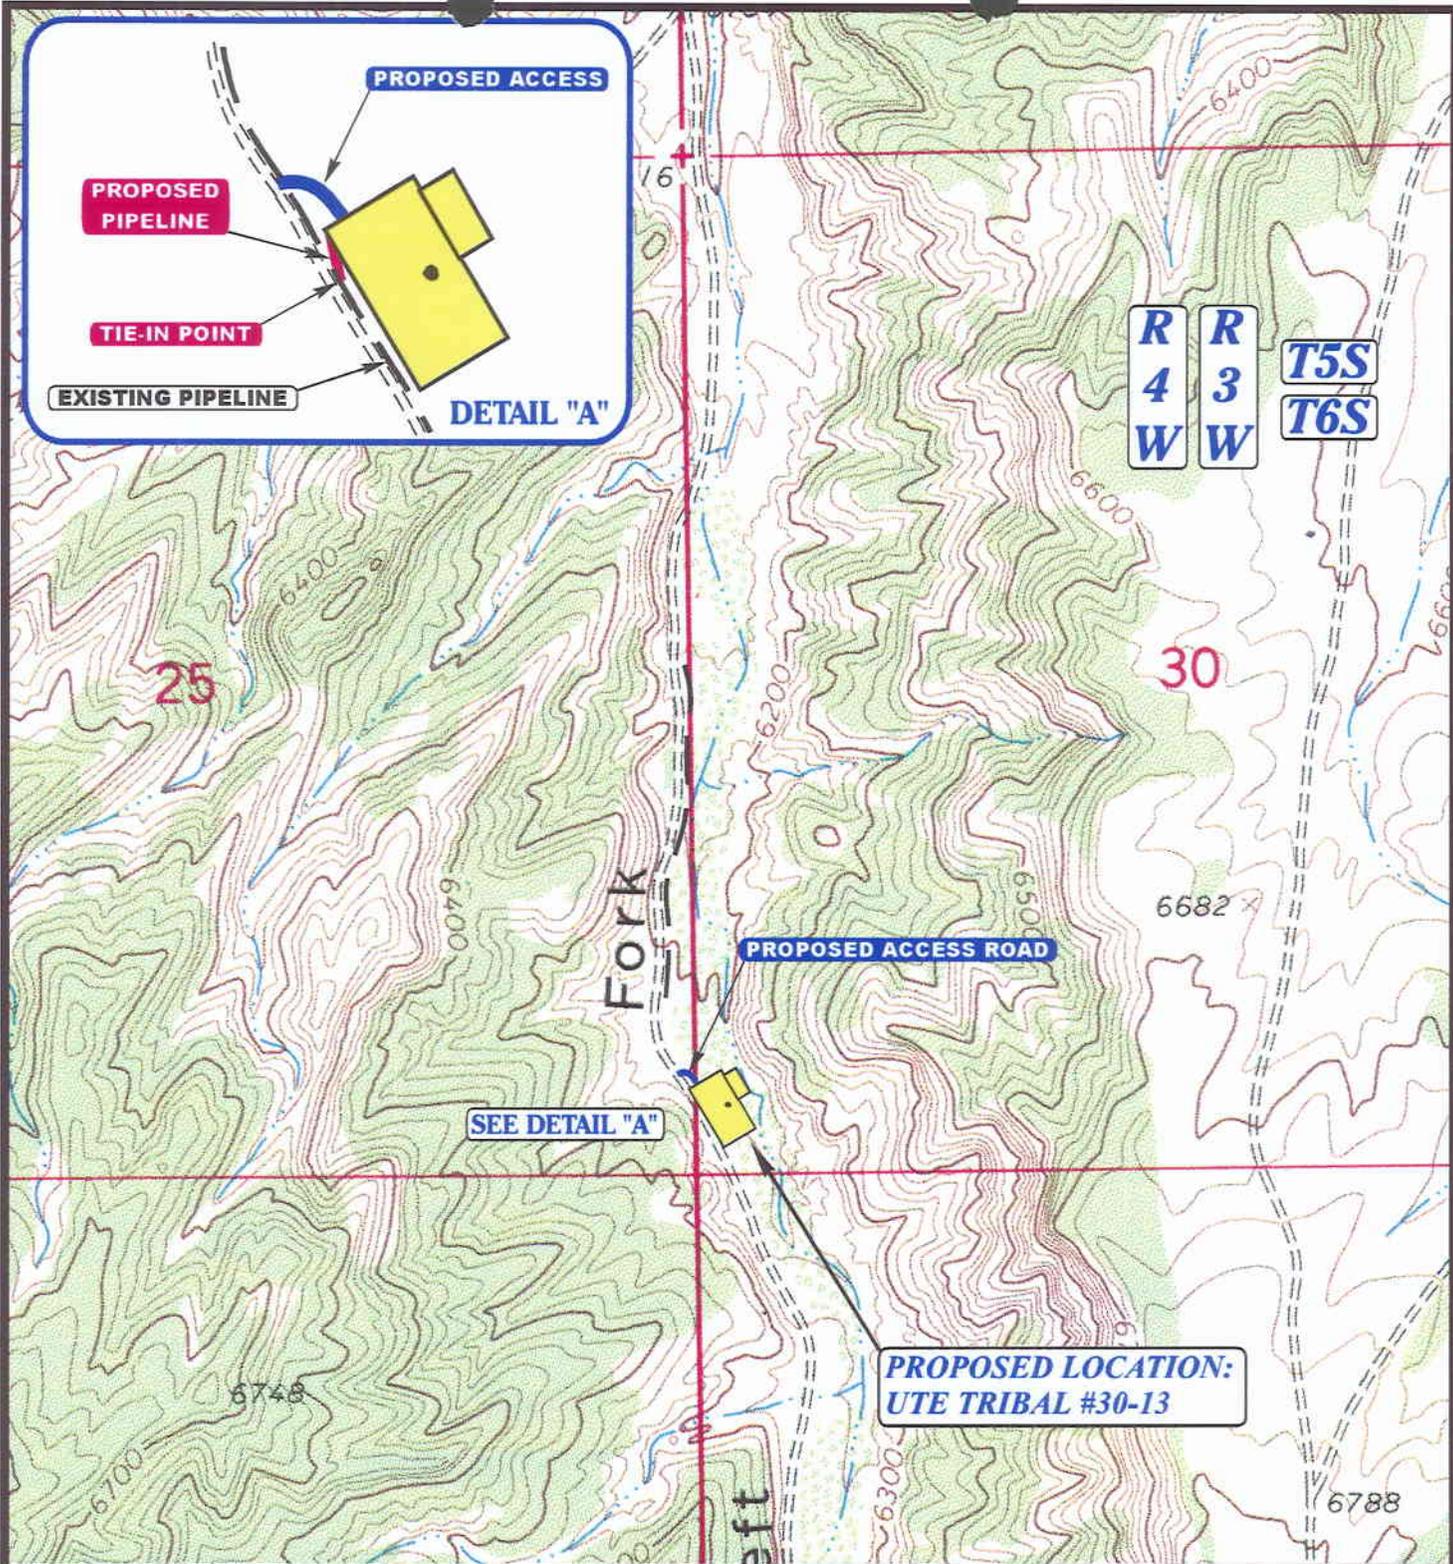

APPROXIMATE TOTAL PIPELINE DISTANCE = 30' +/-

LEGEND:

- EXISTING PIPELINE
- - - PROPOSED PIPELINE
- PROPOSED ACCESS



PETROGLYPH OPERATING CO., INC.

UTE TRIBAL #30-13
SECTION 30, T5S, R3W, U.S.B.&M.
390' FSL 183' FWL

U E L S Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (801) 789-1017 * FAX (801) 789-1018
 Email: uels@easilink.com

TOPOGRAPHIC MAP **5 22 97**
 MONTH DAY YEAR
 SCALE: 1" = 1000' DRAWN BY: D.COX REVISED: 00-00-00 **D TOPO**

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 08/15/97

API NO. ASSIGNED: 43-013-31930

WELL NAME: UTE TRIBAL 30-13
 OPERATOR: PETROGLYPH OPERATING (N3800)

PROPOSED LOCATION:
 SWSW 30 - T05S - R03W
 SURFACE: 0390-FSL-0183-FWL
 BOTTOM: 0390-FSL-0183-FWL
 DUCHESNE COUNTY
 ANTELOPE CREEK FIELD (060)

LEASE TYPE: IND
 LEASE NUMBER: 14-20-H62-3519

PROPOSED PRODUCING FORMATION: GRRV

INSPECT LOCATION BY: / /		
TECH REVIEW	Initials	Date
Engineering		
Geology		
Surface		

RECEIVED AND/OR REVIEWED:

Plat

Bond: Federal State Fee
 (Number 804556)

Potash (Y/N)

Oil shale (Y/N)

Water permit
 (Number 43-10152)

RDCC Review (Y/N)
 (Date: _____)

LOCATION AND SITING:

___ R649-2-3. Unit: _____


___ R649-3-2. General.

R649-3-3. Exception.

___ Drilling Unit.
 Board Cause no: _____
 Date: _____


COMMENTS: Surf. owner - Ute Indian Tribe
EXCEPTION LOCATION OK

STIPULATIONS: ① FEDERAL APPROVAL



DIVISION OF OIL, GAS & MINING

OPERATOR: PETROGLYPH OPERATING (N3800)
FIELD: ANTELOPE CREEK (060) 2nd RECOVERY
SEC. 7,19,28, & 30 TWP 5S, RNG 3W
COUNTY: DUCHESNE UAC: R649-3-2 & R649-3-3

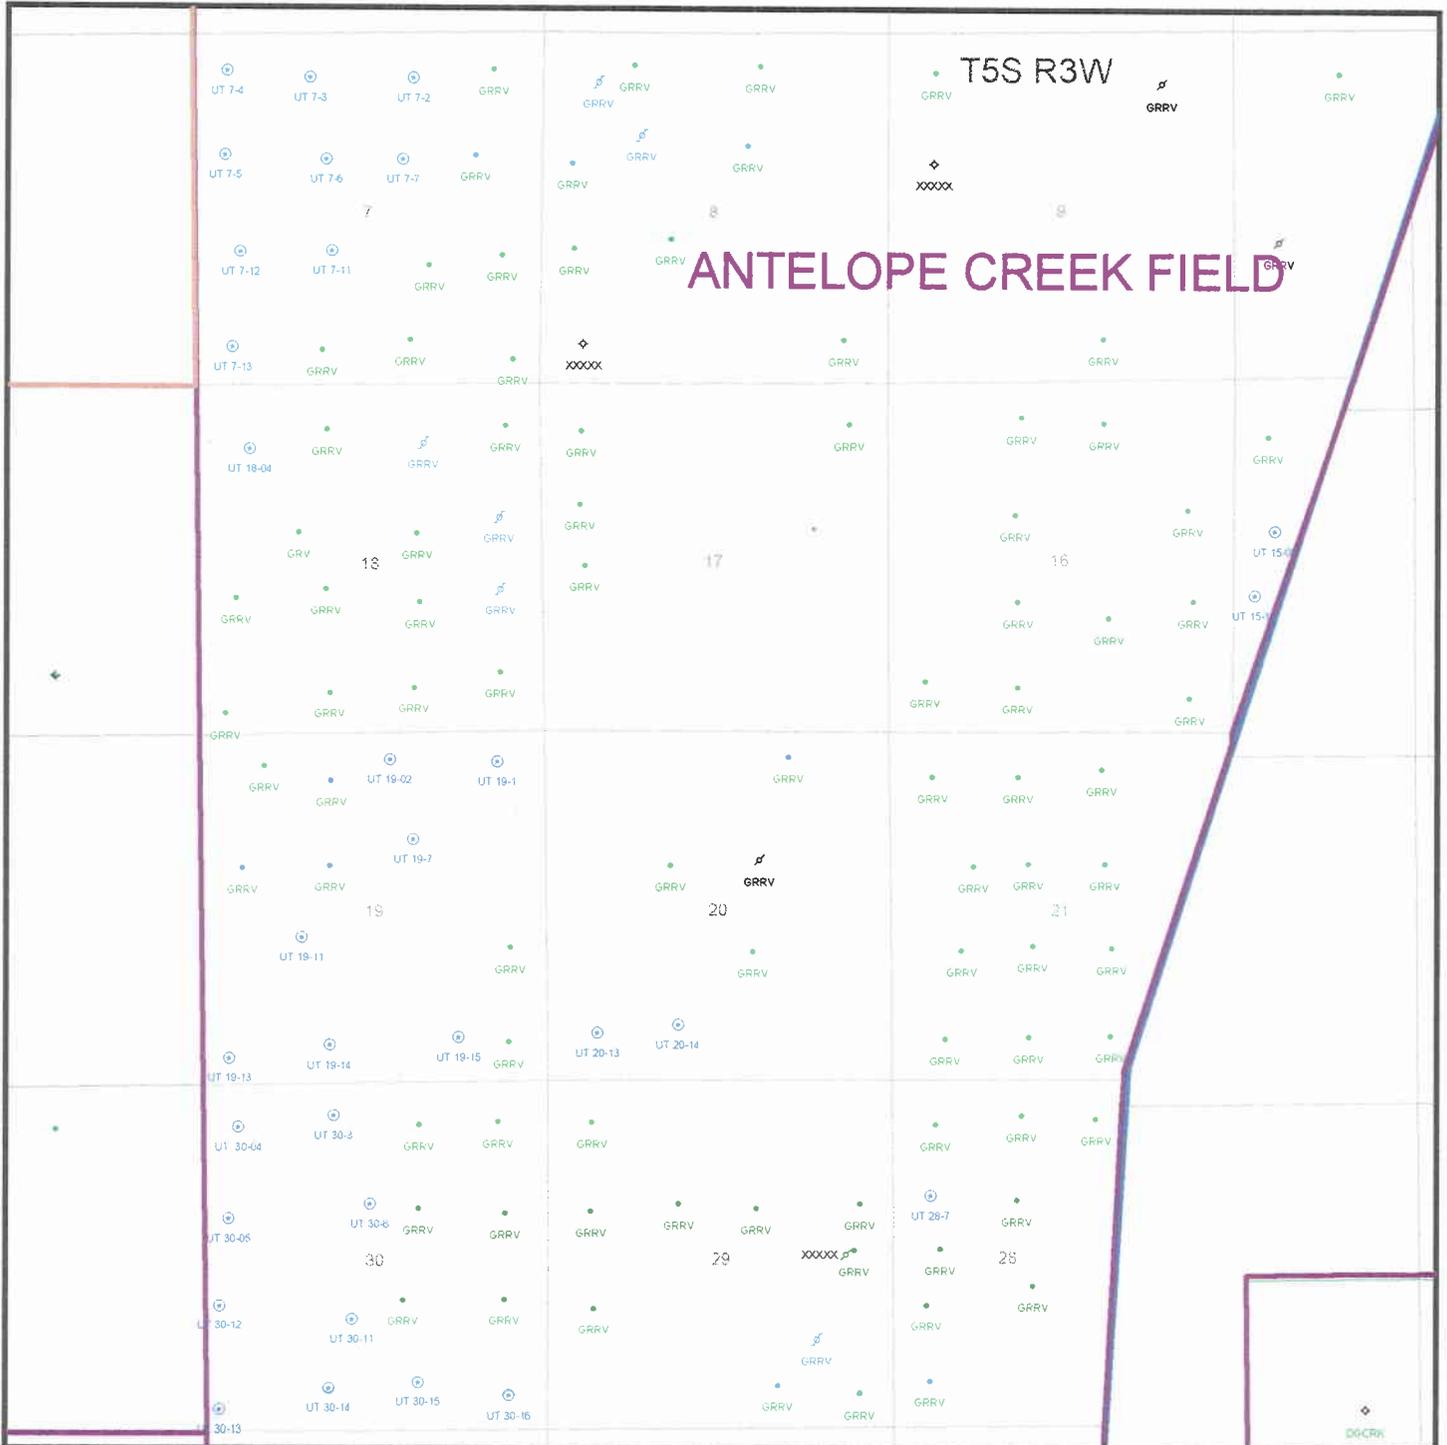


DATE PREPARED:
26-MAY-1998

OPERATOR: PETROGLYPH (N3800)

FIELD: ANTELOPE CREEK (060)


SEC, TWP, RNG: SEC. 30, T5S, R3W

COUNTY: DUCHESNE UAC: R649-3-3

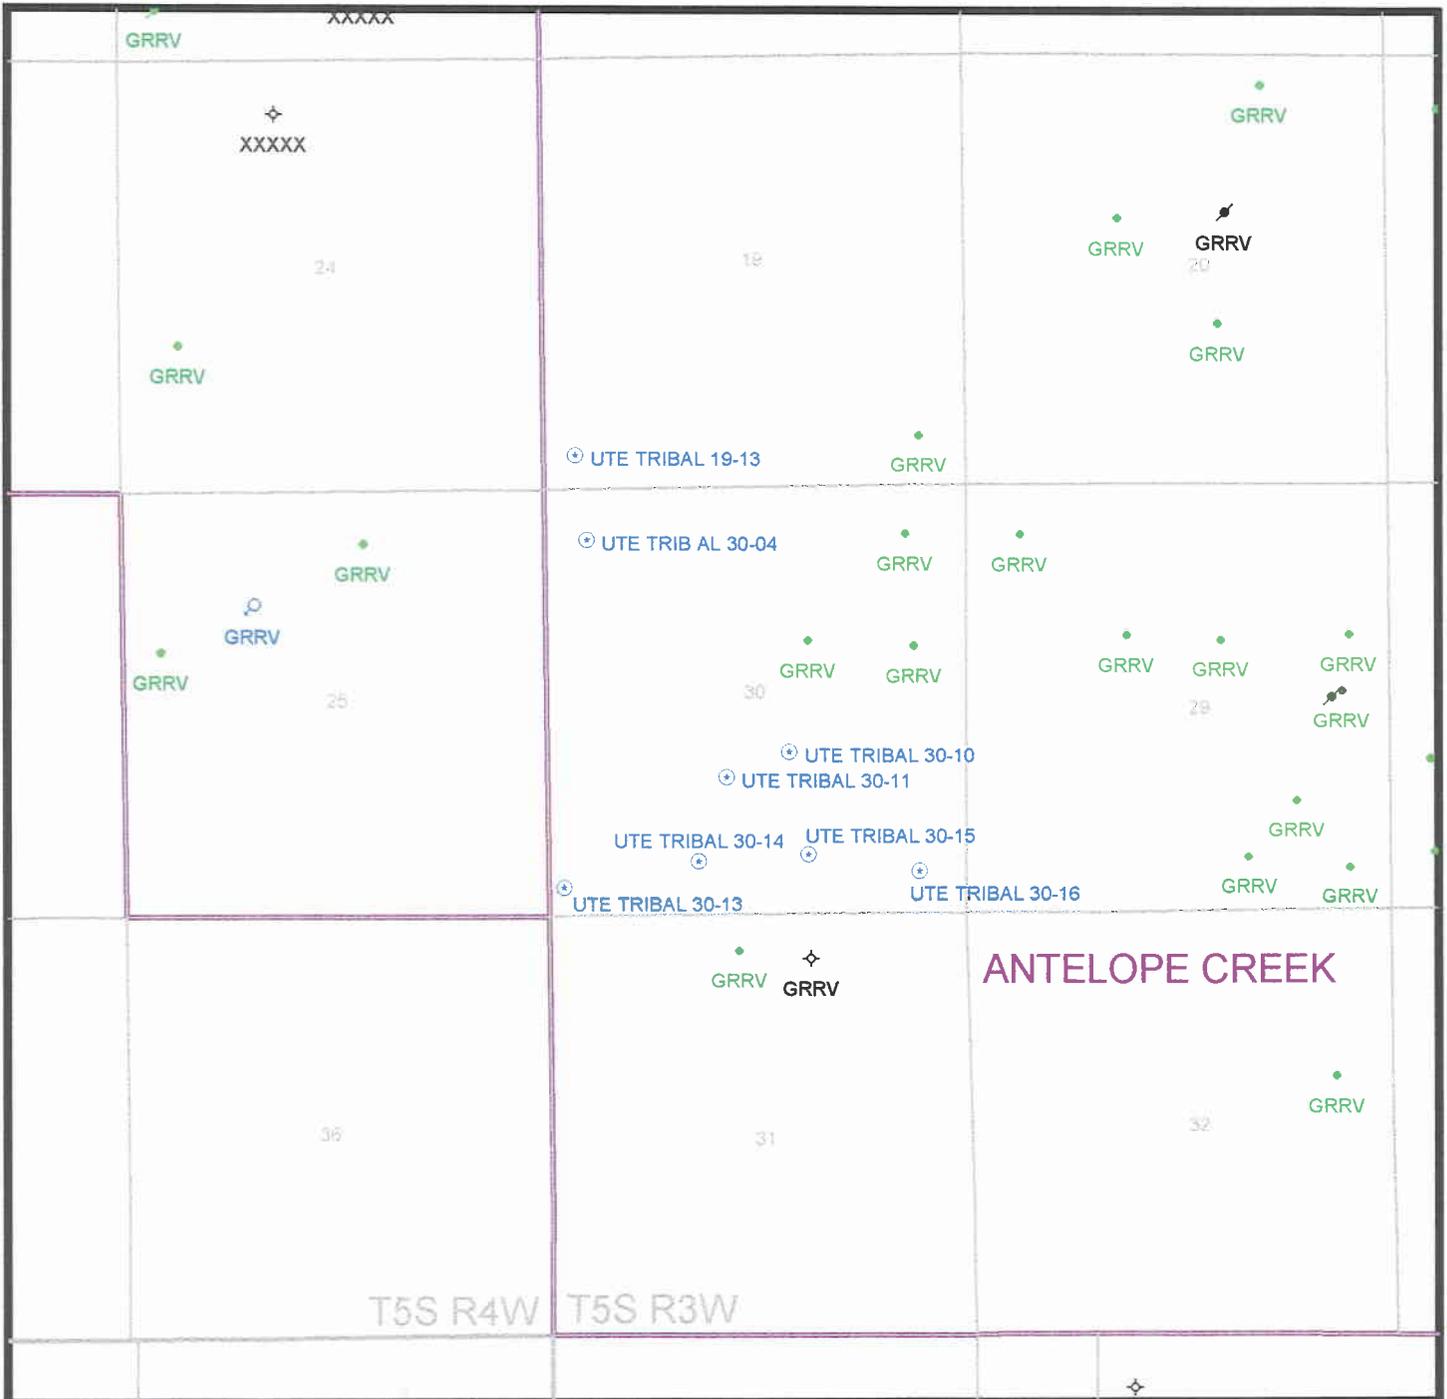

PREPARED:
DATE: 18-AUG-97

State of Utah
Division of Oil, Gas & Mining
1594 West North Temple
Box 145801
Salt Lake City, UT 84114-5801

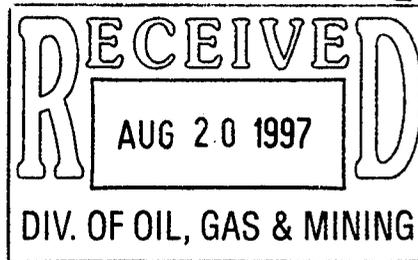

August 18, 1997

RE: Application for Exception Well Location
Proposed Ute Tribal #30-13
Township 5 South, Range 3 West
Section 30: SW/4 SW/4
Duchesne County, Utah

Gentlemen;

Petroglyph Operating Company, Inc. (Petroglyph) respectfully requests administrative approval per R-649-3-3 to drill the Ute Tribal #30-13 a 5559' Green River test, at a location 390' FSL & 183' FWL, SW/4 SW/4, Section 30, Township 5 South Range 3 West, Duchesne County, Utah.

The aforementioned footage is not a location at which a well could be drilled in compliance with the spacing order of this lease, which established 40 acre drilling units.

Enclosed is a topographic map which depicts the surface contour in the area of the subject location. Petroglyph believes the proposed exceptionally spaced location to be the preferred location from a construction standpoint. Also this location is preferred by the Bureau of Indian Affairs Resource Department and the Ute Indian Tribe, Energy and Minerals Department who regulate activities on this land.

Also enclosed please find a Letter of Consent from Mission Oil Corporation granting their consent for this location being less than 460' from their lease line.


Mission Oil Corporation holds 100% of the operating rights underlying the drilling unit to the west.

Petroglyph Operating Company Inc. holds 100% of the operating rights underlying the subject drilling unit as well as drilling units within a one-half mile radius of the subject unit to the north, south and east.

Petroglyph respectfully requests the Division of Oil, Gas and Mining Administratively grant this application for the exceptional well location at its earliest opportunity.

Please direct further correspondence and approval to myself at P.O. Box 1910,
Vernal, Utah 84078, or phone me at 801-789-4120.

Sincerely,

A handwritten signature in cursive script, appearing to read "Ed Trotter". The signature is written in black ink and is positioned above the typed name.


Petroglyph Operating Company Inc.
Ed Trotter, Agent

T5S, R3W, U.S.B.&M.

1 1/2" Galv. Cap
Set Marked Stone,
Steel Post & Pile
of Stones


PETROGLYPH OPERATING CO., INC.

Well Location, UTE TRIBAL #30-13, located as shown in SW 1/4 SW 1/4 of Section 30, T5S, R3W, U.S.B.&M. Duchesne County, Utah.

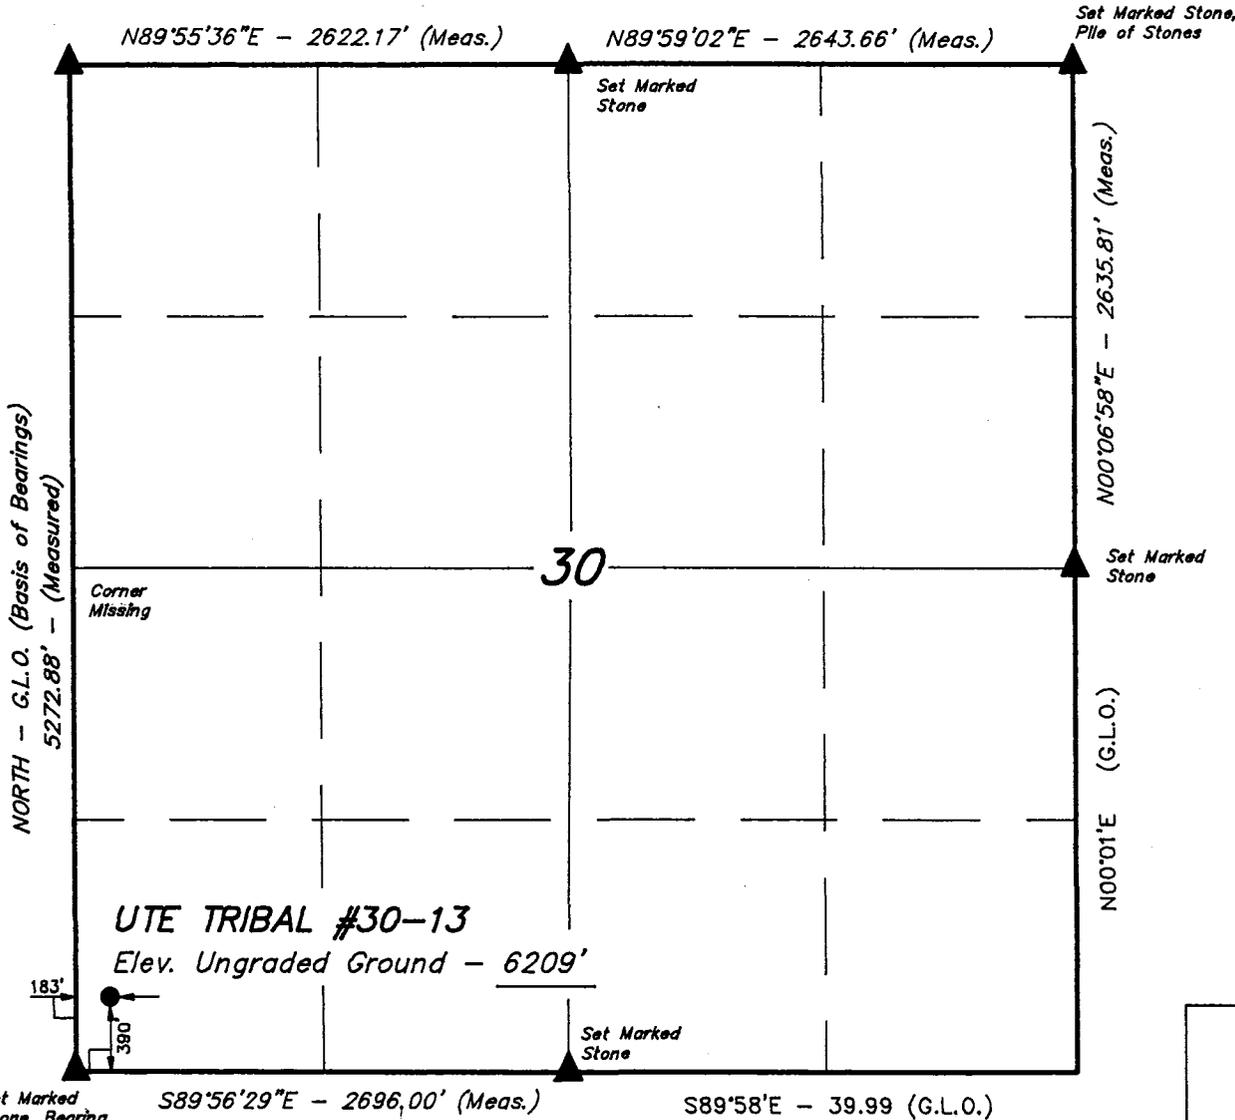

BASIS OF ELEVATION


SPOT ELEVATION AT THE NORTHWEST CORNER OF SECTION 30, T5S, R3W, U.S.B.&M. TAKEN FROM THE DUCHESNE SE QUADRANGLE, UTAH, DUCHESNE COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 6116 FEET.

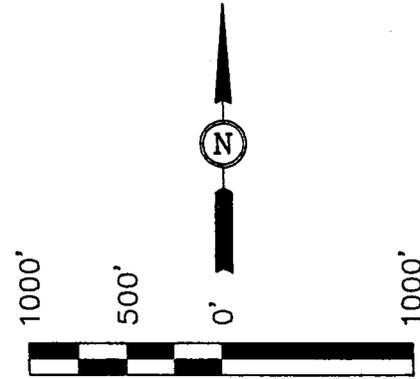

SCALE

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

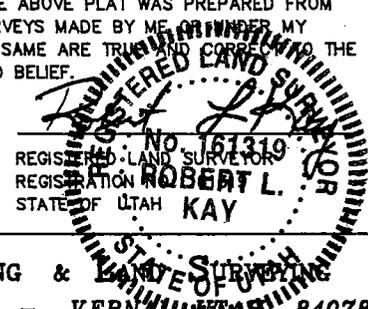


UNTAH ENGINEERING & SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (801) 789-1017

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

SCALE 1" = 1000'	DATE SURVEYED: 5-20-97	DATE DRAWN: 5-20-97
PARTY D.A. G.S. C.B.T.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE PETROGLYPH OPERATING CO., INC.	

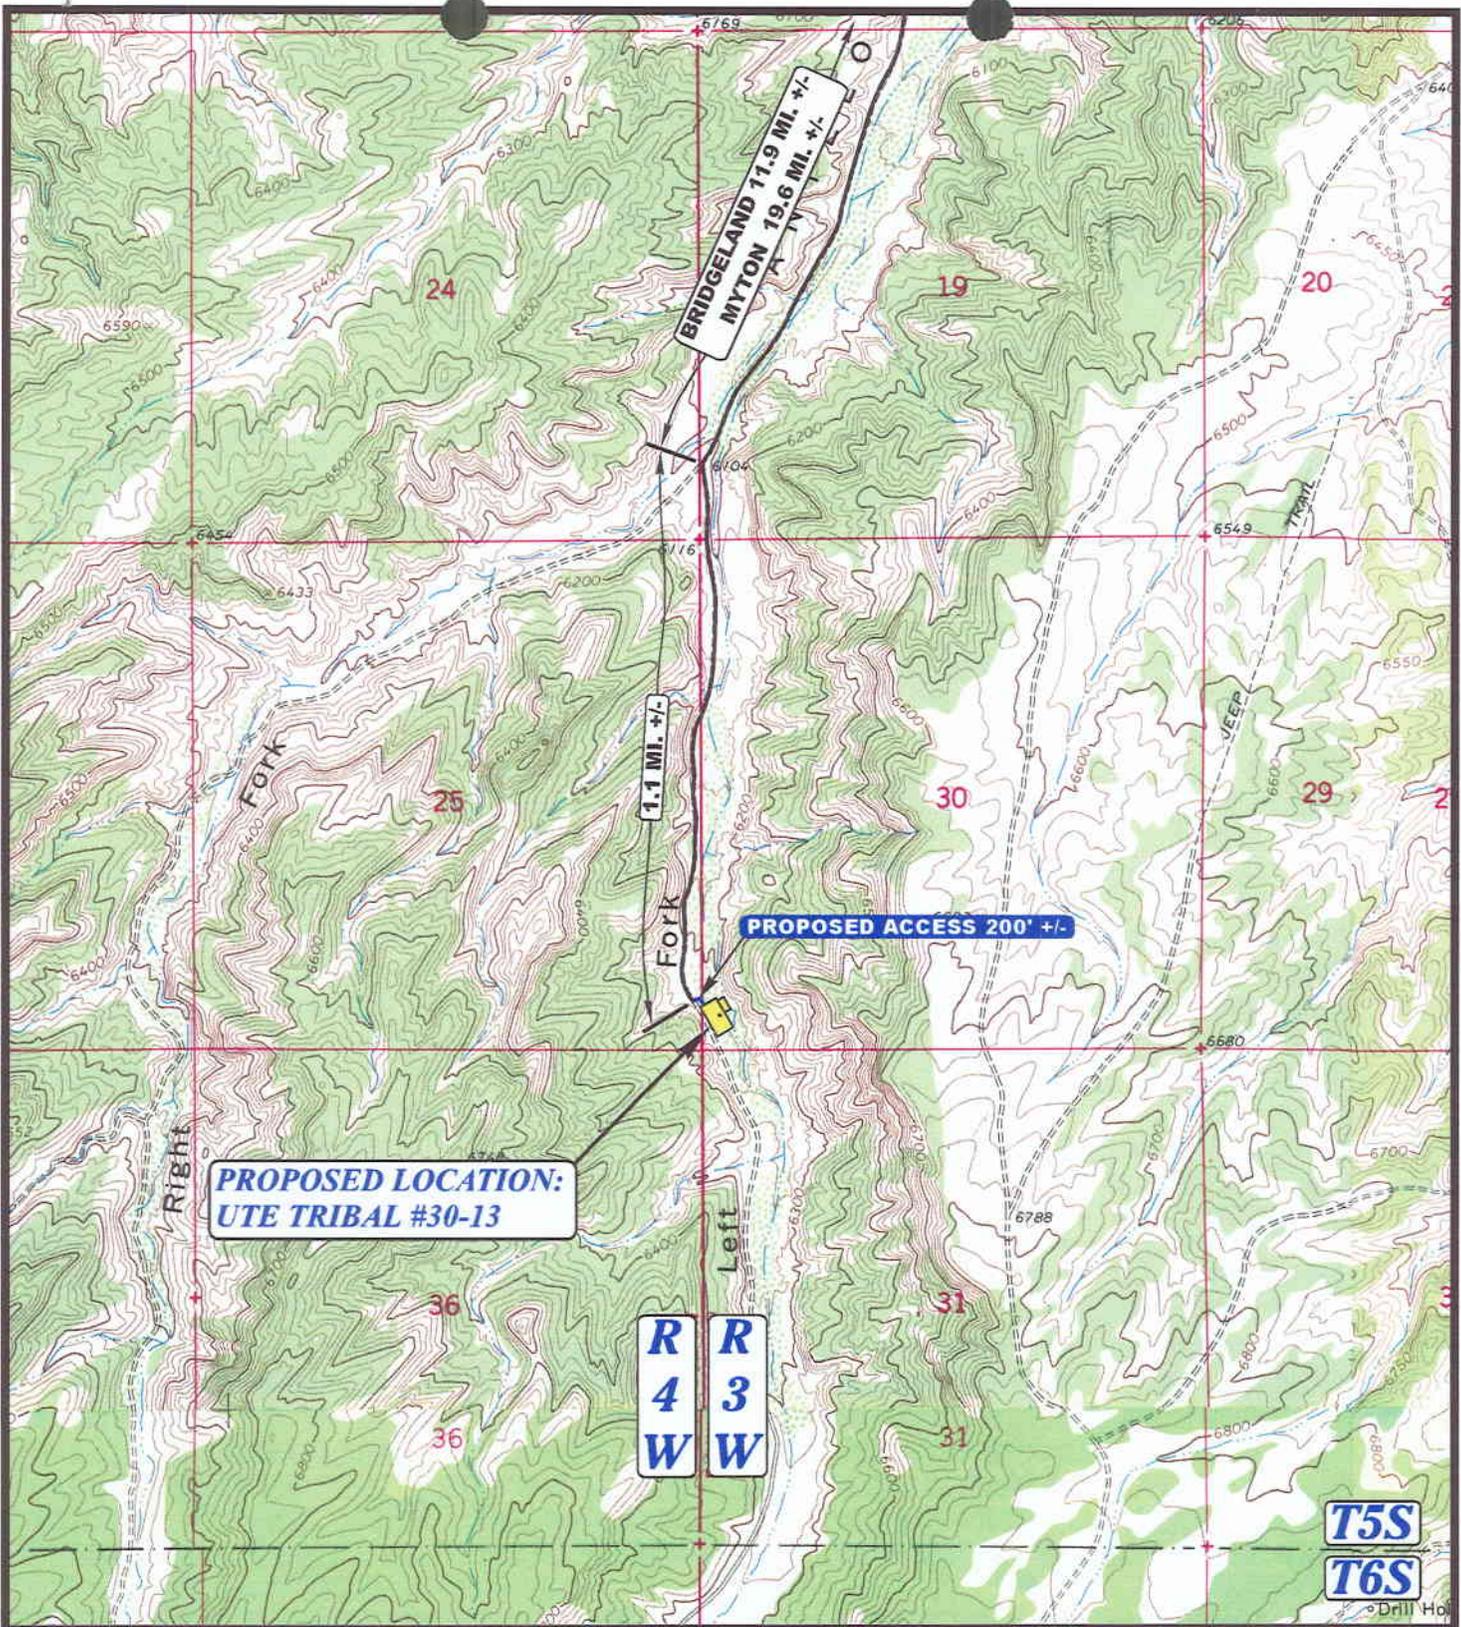

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING ROAD



PETROGLYPH OPERATING CO., INC.

UTE TRIBAL #30-13
SECTION 30, T5S, R3W, U.S.B.&M.
390' FSL 183' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (801) 789-1017 * FAX (801) 789-1018
 Email: uels@easilink.com

TOPOGRAPHIC
MAP

5 22 97
 MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: D.COX REVISED: 00-00-00





State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt
Governor
Ted Stewart
Executive Director
Lowell P. Braxton
Division Director

1594 West North Temple, Suite 1210
PO Box 145801
Salt Lake City, Utah 84114-5801
801-538-5340
801-359-3940 (Fax)
801-538-7223 (TDD)

June 1, 1998

Petroglyph Operating Company
P.O. Box 607
Roosevelt, Utah 84066


Re: Ute Tribal 30-13 Well, 390' FSL, 183' FWL, SW SW, Sec. 30,
T. 5 S., R. 3 W., Duchesne County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. 40-6-1 et seq., Utah Administrative Code R649-3-1 et seq., and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-013-31930.

Sincerely,

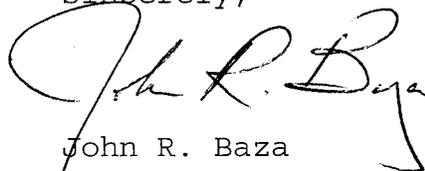
John R. Baza
Associate Director

lwp

Enclosures

cc: Duchesne County Assessor
Bureau of Land Management, Vernal District Office

Operator: Petroglyph Operating Company
Well Name & Number: Ute Tribal 30-13
API Number: 43-013-31930
Lease: 14-20-H62-3519
Location: SW SW Sec. 30 T. 5 S. R. 3 W.

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for Permit to Drill.

2. Notification Requirements

Notify the Division within 24 hours prior to spudding the well or commencing drilling operations. Contact Jim Thompson at (801) 538-5336.

Notify the Division prior to commencing operations to plug and abandon the well. Contact Dan Jarvis at (801) 538-5338 or Robert Krueger at (801) 538-5274.

3. Reporting Requirements

All required reports, forms and submittals shall be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supercede the required federal approval which must be obtained prior to drilling.

Division of Oil, Gas and Mining
PHONE CONVERSATION DOCUMENTATION FORM

Route original/copy to:

Well File Uti Tribal 30-13

Suspense

Other

(Loc.) Sec 30 Twp 55 Rng 3W

(Return Date) _____

(API No.) 43-013-31930

(To-Initials) _____

1. Date of Phone Call: Nov. 13 Time: 10:00

2. DOGM Employee (name) J. Cordove (Initiated Call)

Talked to:

Name Mike Safford (Initiated Call) - Phone No. ~~804~~ 435-722-2531

of (Company/Organization) _____

3. Topic of Conversation: Extend APD?

4. Highlights of Conversation:

He will follow-up & req. rescind or submit letter to extend.

12-12-00 He will follow-up.

APD Not Approved yet
by BLM
As of 8/30/2000

Notes from Margie Herman - BLM Vernal
email to Don Staley dated 8/30/2000.
Margie's comments highlighted.

Well File

Company Name	API	Well Name	Approval Date	Extension Date	Twp	Rng	Sec	County	Lease Type
COASTAL OIL & GAS CORP	4304733278	OURAY 3-74 NO BIA CONCURRENCE	08-Feb-99		090S	210E	03	UINTAH	INDIAN
DOMINION EXPL & PROD INC	4304733361	RBU 5-3F DRILLING	03-Aug-99		100S	200E	03	UINTAH	FEDERAL
EOG RESOURCES INC	4304733135	NBU 490-30E SPUD 9/21/98	09-Jul-98		090S	210E	30	UINTAH	FEDERAL
EOG RESOURCES INC	4304733214	CWU 569-28 NOT APPROVED YET	22-Oct-98		090S	220E	28	UINTAH	FEDERAL
FALCON CREEK RESOURCES	4301331997	TWIN KNOLLS 11-9 J EXPIRED 1/00	26-Jan-98	26-Jan-00	110S	170E	09	DUCHESNE	FEDERAL
INLAND PRODUCTION COMPANY	4301332123	UTE TRIBAL 8-30-4-2 NOT APPROVED YET	25-Nov-98		040S	020W	30	DUCHESNE	INDIAN
INLAND PRODUCTION COMPANY	4301331951	WELLS DRAW 9-30 EXTENDED TO 6/01	09-Jul-98		080S	160E	30	DUCHESNE	FEDERAL
INLAND PRODUCTION COMPANY	4301332114	WEST POINT 5-31-8-16 EXPIRES 12/11/00	09-Sep-98		080S	160E	31	DUCHESNE	FEDERAL
INLAND PRODUCTION COMPANY	4301332115	WEST POINT 6-31-8-16 EXPIRES 12/14/00	09-Sep-98		080S	160E	31	DUCHESNE	FEDERAL
INLAND PRODUCTION COMPANY	4301332116	WEST POINT 7-31-8-16 EXPIRES 12/14/00	09-Sep-98		080S	160E	31	DUCHESNE	FEDERAL
INLAND PRODUCTION COMPANY	4301332119	WEST POINT 9-31-8-16 EXPIRES 11/10/00	09-Sep-98		080S	160E	31	DUCHESNE	FEDERAL
INLAND PRODUCTION COMPANY	4301332120	WEST POINT 11-31-8-16 EXPIRES 11/10/00	09-Sep-98		080S	160E	31	DUCHESNE	FEDERAL
INLAND PRODUCTION COMPANY	4301332032	MONUMENT BUTTE 7N-35-8-16 NOT APPROVED YET	09-Jul-98		080S	160E	35	DUCHESNE	FEDERAL
INLAND PRODUCTION COMPANY	4301332106	SOUTH WELLS DRAW 13-3-9-16 EXPIRES 10/8/00	10-Aug-98		090S	160E	03	DUCHESNE	FEDERAL
LONE MTN PRODUCTION CO	4304733184	A FED H 41-28 EXPIRES 12/3/00	09-Sep-98		100S	240E	28	UINTAH	FEDERAL
LONE MTN PRODUCTION CO	4304733165	FED H 14-30 PRODUCING GAS WELL	19-Aug-98		100S	240E	30	UINTAH	FEDERAL
LONE MTN PRODUCTION CO	4304733183	FED T 31-11 HOLDING FOR NOW	14-Sep-98		120S	240E	11	UINTAH	FEDERAL
LONE MTN PRODUCTION CO	4304733323	FED V 12-21 DRILLING 4/27/99	24-Mar-99		130S	210E	21	UINTAH	FEDERAL
PACIFIC TRANS SUPPLY	4301330435	PTS 32-29 FEDERAL EXPIRED 5/00	20-May-98		080S	170E	29	DUCHESNE	FEDERAL
PETROGLYPH OPERATING CO	4301331930	UTE TRIBAL 30-13 NOT APPROVED YET	01-Jun-98		050S	030W	30	DUCHESNE	INDIAN
RETAMCO OPERATING INC	4304733311	RIVER BEND 13-27 EXPIRES 3/7/01	18-Mar-99		090S	190E	27	UINTAH	FEDERAL
RETAMCO OPERATING INC	4304733312	ROCK HOUSE 11-31 APPROVED 8/25/00	18-Mar-99		100S	230E	31	UINTAH	FEDERAL
RETAMCO OPERATING INC	4304733369	ATCHEE RIDGE 11-27-13-25 EXPIRES 8/31/00	20-Aug-99		130S	250E	27	UINTAH	FEDERAL
ROSEWOOD RESOURCES INC	4304733263	FEDERAL H 34-30 EXPIRES 4/22/01	18-Feb-99		100S	240E	30	UINTAH	FEDERAL
ROSEWOOD RESOURCES INC	4304733242	FEDERAL K 23-22 EXPIRES 4/22/01	10-Dec-98		110S	210E	22	UINTAH	FEDERAL
ROSEWOOD RESOURCES INC	4304733264	FEDERAL N 42-22 HOLDING FOR NOW	15-Dec-98		110S	240E	22	UINTAH	FEDERAL
ROSEWOOD RESOURCES INC	4304733217	HANGING ROCK I 4-14 HOLDING FOR NOW	20-Oct-98		120S	230E	04	UINTAH	FEDERAL
ROSEWOOD RESOURCES INC	4304733218	HANGING ROCK I 5-16 HOLDING FOR NOW	19-Oct-98		120S	230E	05	UINTAH	FEDERAL
ROSEWOOD RESOURCES INC	4304733234	HANGING ROCK I 6-2 HOLDING FOR NOW	10-Nov-98		120S	230E	06	UINTAH	FEDERAL
ROSEWOOD RESOURCES INC	4304733219	HANGING ROCK I 9-11 HOLDING FOR NOW	20-Oct-98		120S	230E	09	UINTAH	FEDERAL
SHENANDOAH ENERGY INC	4304733269	WVFU 18 WG NOT APPROVED YET	06-Jan-99		080S	210E	14	UINTAH	INDIAN



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt
Governor

Kathleen Clarke
Executive Director

Lowell P. Braxton
Division Director

1594 West North Temple, Suite 1210

PO Box 145801

Salt Lake City, Utah 84114-5801

801-538-5340

801-359-3940 (Fax)

801-538-7223 (TDD)

February 16, 2001

Michael Safford
Petroglyph Operating Company
P. O. Box 607
Roosevelt, Utah 84066

Re: APD Rescinded – Ute Tribal 30-13, Section 30, Township 5 South, Range 3 West
Duchesne County, Utah - API No. 43-013-31930

Dear Mr. Safford:

The Application for Permit to Drill (APD) the above referenced well was approved by the Division of Oil, Gas and Mining (Division) on June 1, 1998. On August 30, 2000, the Bureau of Land Management (BLM) informed the Division that the BLM had received the APD but that it had not been approved. Since that time the Division has attempted to get a request for a one-year extension from Petroglyph however our attempts have been unsuccessful. No drilling activity at this location has been reported to the Division. Due to the excessive time delay in commencing drilling operations, approval to drill the well is hereby rescinded, effective February 16, 2001.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

A handwritten signature in cursive script that reads "Lisha Cordova".

Lisha Cordova
Eng. Technician

cc: Well File
Bureau of Land Management, Vernal
Petroleum Information