

FILE NOTATIONS

Entered in NID File _____
 Entered On S R Sheet _____
 Location Map Pinned _____
 Card Indexed _____
 IWR for State or Fee Land _____

Checked by Chief _____
 Copy NID to Field Office _____
 Approval Letter _____
 Disapproval Letter _____

COMPLETION DATA:

Date Well Completed 9-5-58
 OW _____ WW _____ TA _____
 GW _____ OS _____ PA X

Location Inspected _____
 Bond released _____
 State of Fee Land _____

LOGS FILED

Driller's Log 9-17-58
 Electric Logs (No. 1)

E H E1 ER ERN Nitro
 Let Mill Spine Others _____

Scout Report sent out



Noted in the NID File



Location map pinned



Approval or Disapproval Letter



Date Completed, P. & A. or
operations suspended



Pin changed on location map



Affidavit and Record of A & P



Water Shut-Off Test




Gas-Oil Ratio Test



Well Log Filed





(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office **Salt Lake City**
Lease No. **U-023644**
Unit **Salt Wash Unit**

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

..... **May 15**, 19**58**

Salt Wash Unit
Well No. **#22-34** is located **1980** ft. from **[N]** line and **3250** ft. from **[E]** line of sec. **34**
SE/4 NW/4 Sec. 34 **22S** **17E** **SLM**
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Salt Wash **Grand** **Utah**
(Field) (County or Subdivision) (State or Territory)

The elevation of the ~~surface~~ **ground** above sea level is **4208** ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Propose to drill well to test Madison formation to about 9500'.

Will set approximately 1000' of 13-3/8" surface casing with cement circulated to surface.

Will set 7" casing on top of or through any producing zones encountered.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.



Company **The Superior Oil Company**
Address **P. O. Box 200**
Casper, Wyoming
By **W. H. Fisher**
Title **District Engineer**

TOWNSHIP 22 SOUTH, RANGE 17 EAST, S.L.M.
SEC. 34.
SE 1/4 NW 1/4.

THE SUPERIOR OIL
COMPANY

APR 24 REC'D

ENGINEERING
GASPER

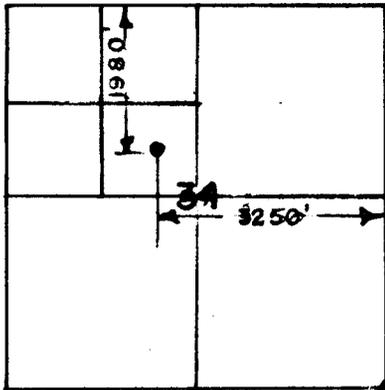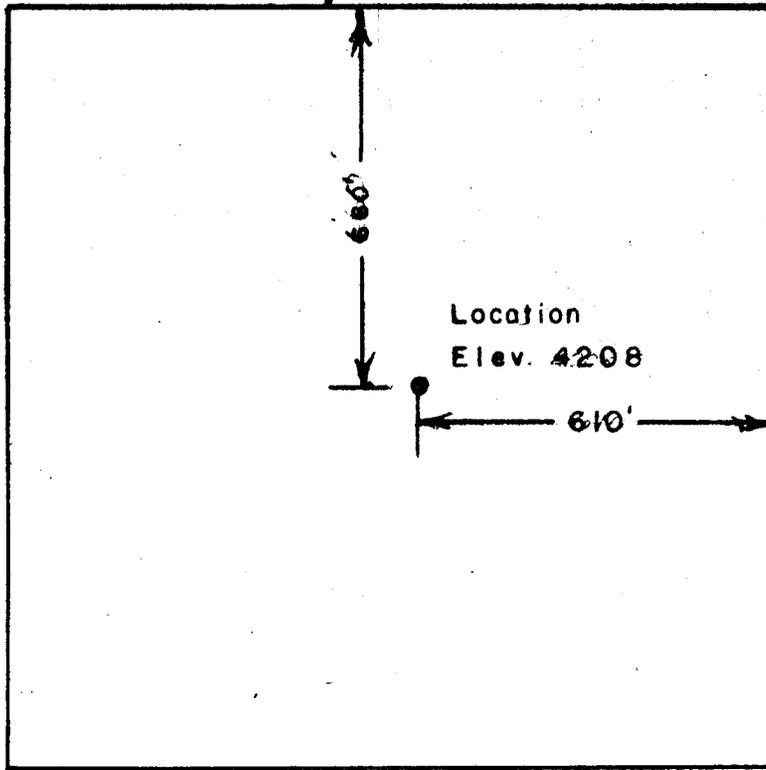

SE COR FOUND
STONE (2 NOTCHES ON EAST FACE)

THE SUPERIOR OIL CO
SE 1/4 NW 1/4, SECTION 34, T 22 S, R 17 E S. L. M.
GRAND COUNTY, UTAH.
SURVEY AND PLAT
April 5, 1958

JOHN BENE, CE 1958
PRICE, UTAH

May 19, 1958

The Superior Oil Company
P. O. Box 200
Casper, Wyoming

Attention: W. H. Fraser, District Engineer

Gentlemen:

This is to acknowledge receipt of your notice of intention to drill Well No. Salt Wash Unit 22 - 34, which is to be located 1980 feet from the north line and 3250 feet from the east line of Section 34, Township 22 South, Range 17 East, SEM, Grand County, Utah.

Please be advised that insofar as this office is concerned, approval to drill said well is hereby granted.

Yours very truly,

OIL & GAS CONSERVATION COMMISSION

CLEON B. FREIGHT
SECRETARY

CBF:en

cc: Don Russell
USGS, Federal Bldg.
Salt Lake City

THE SUPERIOR OIL COMPANY

DRILLING & PRODUCTION DEPT.

P. O. BOX 200

CASPER, WYOMING

September 2, 1958

United States Geological Survey
457 Federal Building
Salt Lake City, Utah

Attention: Mr D. F. Russell


Attached are three copies of Sundry Notice of Intention to Abandon
Salt Wash Unit #22-34, Grand County, Utah.

THE SUPERIOR OIL COMPANY


W. H. Fraser

cc: Utah Oil & Gas Conservation Commission
Room 140, State Capitol Building
Salt Lake City, Utah

W



(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office **Salt Lake City**
Lease No. **U-023644**
Unit **Salt Wash**

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....		SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....	X		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

September 2, 1958

Salt Wash Unit
Well No. **#22-34** is located **1980** ft. from **{N}** line and **3250** ft. from **{E}** line of sec. **34**
SE/4 NW/4 Sec. 34 **22S** **17E** **SLM**
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Salt Wash **Grand** **Utah**
(Field) (County or Subdivision) (State or Territory)

kelly bushing
The elevation of the ~~drill~~ **drill** above sea level is **4220** ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

TD: 10,293'. 12 1/4" hole to 2152', 9-7/8" hole to TD.

13-3/8" casing cemented at 1248' with 1200 sacks.

Propose to abandon well by equalizing the following plugs:


- | | |
|-----------------------------------|---|
| 1. 10,293' to 10,143' - 75 sacks. | 7. Base of surface pipe at 1248' - 50 sacks |
| 2. 9,850' to 9,750' - 50 sacks. | |
| 3. 5,600' to 5,500' - 50 sacks. | Check top of plug after 8 hrs. Cut |
| 4. 3,350' to 3,250' - 50 sacks. | off csg 4' below ground level. Place |
| 5. 2,725' to 2,625' - 50 sacks. | 10 sack plug in top of csg and weld |
| 6. 1,450' to 1,350' - 75 sacks. | steel plate over stub. Erect standard |
| | abandonment marker & clean up location. |

Verbal approval given by D.F. Russell 9-2-58.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **The Superior Oil Company**
Address **P. O. Box 200**
Casper, Wyoming
By *W.H. Frase*
Title **District Engineer**

W



(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office **Salt Lake City**
Lease No. **U-023644**
Unit **Salt Wash**

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	XX
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

September 10, 1958

Salt Wash Unit
Well No. **#22-34** is located **1980** ft. from **{N}**/**{S}** line and **3250** ft. from **{E}**/**{W}** line of sec. **34**
SE/4 NW/4 Sec. 34 **22S** **17E** **31N**
(¼ Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Wildcat **Grand** **Utah**
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is **4346** ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

TD: 10,293'. 12½" hole to 2152', 9-7/8" hole to TD.
13-3/8" casing cemented at 1248' with 1200 sacks.

Abandoned well by equalizing following plugs through open end drill pipe:

1. 75 sacks with bottom of drill pipe at 10,293'.
2. 50 sacks with bottom of drill pipe at 9,850'.
3. 50 sacks with bottom of drill pipe at 5,600'.
4. 50 sacks with bottom of drill pipe at 3,350'.
5. 50 sacks with bottom of drill pipe at 2,725'.
6. 75 sacks with bottom of drill pipe at 1,450'.
7. 50 sacks with bottom of drill pipe at 1,248'.

(over)

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **The Superior Oil Company**

Address **P. O. Box 200**
Casper, Wyoming

By *W.H. France*

Title **District Engineer**

SEP 17 1958

Checked top of plug #7 at 1184'. Placed 10 sack plug in top of 13-3/4" casing.
Cut off casing 4' below ground level and welded 1/2" steel plate over stub.
Erected standard abandonment marker.

Plugged and Abandoned September 5, 1958.

THE SUPERIOR OIL COMPANY

DRILLING & PRODUCTION DEPT.

P. O. BOX 200

CASPER, WYOMING

September 15, 1958

United States Geological Survey
457 Federal Building
Salt Lake City, Utah

Attention: Mr. D. F. Russell


Attached are three copies of the Subsequent Report
of Abandonment on Salt Wash Unit #22-34, Grand County,
Utah.

THE SUPERIOR OIL COMPANY


W. H. Fraser

WHF/cw

cc: Oil & Gas Conservation Commission
310 Newhouse Building
Salt Lake City 14, Utah



(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Salt Lake City

Lease No. U-023644

Unit Salt Wash

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	X
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

September 15, 1958

Salt Wash Unit

Well No. #22-34 is located 1980 ft. from N line and 3250 ft. from E line of sec. 34

SE/4 NW/4 Sec. 34
(¼ Sec. and Sec. No.)

22S
(Twp.)

17E
(Range)

SLM
(Meridian)

Wildcat
(Field)

Grand
(County or Subdivision)

Utah
(State or Territory)

The elevation of the derrick floor above sea level is 4346 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Spudded: May 30, 1958. Casing: 13-3/8" cemented at 1248' with 1200 sacks.
BST #1 (2570'-2620')

30 min. ISIP, 1 hour flow test, puff blow of air and dead immediately, 30 min FSIP.
Recovered 45' drilling mud. ISIP 55#, BHFP 55-55#, FSIP 65#, HP 1365-1325#.

BST #2 (4331'-4370')

30 min. ISIP, 2 hour flow test, good blow of air immediately, decreasing to weak blow of air at end of test, 1 hour FSIP. Recovered 20' slightly gas cut drilling mud.
ISIP 160#, BHFP 55#, FSIP 95#, HP 2220#.

BST #3 (10,053'-10,173')

30 min ISIP, 2 hour flow test, fair blow of air immediately and throughout test, 1 hr. FSIP. Recovered 2000' water cushion 500' muddy salt water, 2670' salt water.
ISIP 4550#, BHFP 1200#-2600#, FSIP 4600#, HP 5750#.

Total Depth: 10,293'. Plugged & Abandoned September 5, 1958.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company The Superior Oil Company


Address P. O. Box 200

Casper, Wyoming

By W H Frazer

Title District Engineer

U. S. LAND OFFICE Salt Lake City
SERIAL NUMBER U-023644
LEASE OR PERMIT TO PROSPECT _____

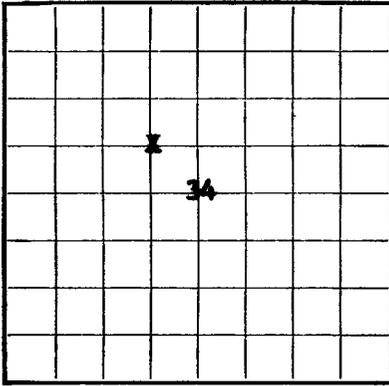

LOCATE WELL CORRECTLY

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company The Superior Oil Company Address P. O. Box 200, Casper, Wyoming
Lessor or Tract Salt Wash Unit Field Salt Wash State Utah
Well No. 22-34 Sec. 34 T. 22S R. 17E Meridian SLM County Grand
Location 1980 ft. {N.} of N. Line and 3250 ft. {E.} of E. Line of Section 34 Elevation 4346 ~~ft.~~
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed W. H. Fraser DOB

Date September 15, 1958 Title District Engineer

The summary on this page is for the condition of the well at above date.

Commenced drilling May 30, 1958 Finished drilling September 5, 1958

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from _____ to _____ No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
13-3/8	54.50	8SD		1248'	Float				Surface

of shoes, a change of plugs were put in to test for water, state kind of material used, position, and results of pumping or running. If the well has been abandoned, give date, time, position, and number with the reasons for the work and its results. If there were any changes made in the casing, state date and if any casing was added, state the date of running together.

HISTORY OF OIL OR GAS WELL

U. S. GOVERNMENT PRINTING OFFICE

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
13-3/8	1248'	1200	Cement circulated to surface.		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

FOLD | MARK

FOLD MARK

13-3/8	1248'	1200	Cement circulated to surface.

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
 Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from Surface feet to 10,293 feet, and from _____ feet to _____ feet
 Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

_____, 19____ ~~Plugged & Abandoned~~ ~~Producing~~ **September 5, 1938**
 The production for the first 24 hours was _____ barrels of fluid of which _____% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, °Bé. _____
 If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
 Rock pressure, lbs. per sq. in. _____

EMPLOYEES

_____, Driller _____, Driller
 _____, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
Electric Log Tops:			
		1720'	Chinle
		2025'	Shinerump
		2125'	Moenkopi
		2400'	Kaibab
		2690'	Coconino
		3200'	Rico
		3310'	Hermosa
		5574'	Paradox Salt
		9786'	Lower Hermosa
		10,004'	Molas
		10,020'	Leadville
		10,174'	Madison

W

SEP 11 1938