

FILE NOTATIONS

Entered in NID File	.....	<i>Prior to OGC</i>	Checked by Chief	.....
Location Map Pinned	.....		Approval Letter	.....
Card Indexed	.....	✓	Disapproval Letter	.....

COMPLETION DATA:

Date Well Completed	<i>5-17-59</i>	Location Inspected	.....
OW.....	WW.....	TA.....	Bond released
GW.....	OS.....	PA. ✓	State or Fee Land

LOGS FILED

Driller's Log..... ✓

Electric Logs (No.) .....

E..... I..... Dual I Lat..... GR-N..... Micro.....

BHC Sonic GR..... Lat..... MI-L..... Sonic.....

CBLog..... CCLog..... Others.....

GRAND PYRAMID OIL INC.

1563 SOUTH 2ND WEST

SALT LAKE CITY, UTAH

April 19-1953

U-05151

Attention Mr. Seaville,  
U.S. Geological Survey  
306 Federal Building  
Salt Lake City, Utah



Dear Sir

have had survey made of drilling  
site in Town 22 S. R. 19 East S. L. M.  
Sec. 20, S.E. 1/4 of S.W. 1/4  
215' N. and 350' west of 1/4 corner


Kept instructions for Paine Potter, <sup>06448</sup> attorney,  
527 Continental Bank Building to secure  
bond for drilling and fill out necessary  
forms for securing permit

Drilling rig will be moved to this  
location Monday April 20 53 by DM Tinney  
Drilling Co, 235 E Main St. Price, Utah.  
They are proceeding rapidly and wish  
to begin.

Thanking you for your courteous cooperation,  
I am

Respectfully yours  
W. W. Magnuson, Secy.

Savoy Hotel  
Price, Utah




(SUBMIT IN TRIPPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

and Office \_\_\_\_\_  
Lesse No. \_\_\_\_\_  
Unit \_\_\_\_\_

ORIGINAL FORWARDED TO CASPER

SUNDRY NOTICES AND REPORTS ON WELLS

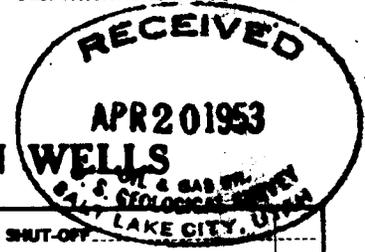

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Well No. 1 is located 215 ft. from S line and 390 ft. from E line of sec. 20  
20 (1/4 Sec. and Sec. No.)      228 (Twp.)      19E (Range)      Salt Lake Meridian (Meridian)  
Grand (County or Subdivision)      Utah (State or Territory)

The elevation of the derrick floor above sea level is \_\_\_\_\_ ft.

DETAILS OF WORK


(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

**1300 feet depth to test Dakota, intended to drill with cubic tools -  
Intend to cement 90' of 12" casing from shoe to surface.**

Approval is conditional upon compliance with the terms attached hereto.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.


Company Grand Pyramid Oil, Inc.  
Address 1562 South 2nd West  
Salt Lake City, Utah  
By Ralph Haper  
Title President



(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY  
ORIGINAL FORWARDED TO CASPER

Land Office Utah  
Lease No. @ 5151  
Unit \_\_\_\_\_

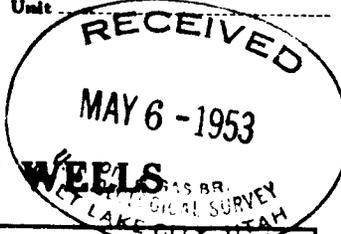

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY
NOTICE OF INTENTION TO ABANDON WELL	<u>SUBSEQUENT REPORT</u>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

May 6, 1953

Well No. 1 is located 215 ft. from NT line and 350 ft. from E line of sec. 20  
SE 1/4 of SW 1/4 of Sec 20 TWP. 22 S R. 19 E SLM  
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Crescent GRAND \_\_\_\_\_  
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is \_\_\_\_\_ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Spud in 19 feet and 15 1/2 inch casing conductor Apr. 21 1953  
12 1/2" casing 42.5 wt casing set to 126 feet  
May 1st 1953. cemented in with 75 sacks  
of Ideal Cement by Haliburton Oil Well  
Cementing Co.


I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company GRAND PYRAMID OIL, INC.  
Address 1563 S. 2nd West  
SALT LAKE CITY, UTAH. By Wormagnuson

Approved MAY 7 - 1953 Title Secretary  
(Orig. Sgd.) H. G. Seoville  
District Engineer


(SUBMIT IN TRIPLICATE)

Land Office Utah  
Lease No. 05151  
Unit \_\_\_\_\_



UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

ORIGINAL FORWARDED TO USER

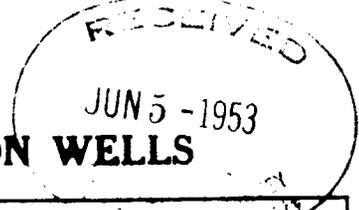

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY
NOTICE OF INTENTION TO ABANDON WELL	

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

June 5, 1953

**Grand Pyramid** Corrected location  
Well No. 1 is located 315 ft. from S line and 3200 ft. from W line of sec. 20

SE 1/4, SW 1/4, NW 1/4, Sec. 20 T. 22 S., R. 12 E. Salt Lake  
Crescent (Field) Grand (County or Subdivision) Utah (Territory)

The elevation of the derrick floor above sea level is 4650 ft. **Altimeter**

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

In addition to the 126 ft. of 12 1/2" I.D., 25 1 1/2" O.D., 45 lb., N-40 casing which was cemented in as surface casing, 1300 ft. of non-threaded, straight end, 40.25 lb., 12 1/2" I.D., (20-ft lengths) casing are being run in the hole to prevent caving in the Mancos formation. Approx. 1800 ft. of this casing has been run in to date. The joints are being made by a solid weld with a rod collar and short straps for reinforcement. This casing will be secured thoroughly to the surface casing at the surface. The well is now temporarily shut down for repairs.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Grand Pyramid Oil Co.


Address c/o Baker's Inn.

1501 S. and E. Salt Lake City, Utah

By Don Tringley  
Title Geologist

Approved 6-5-53  
H.C. Scoville  
District Engineer






(SUBMIT IN TRIPLICATE)

Land Office Salt Lake City

Lease No. 05151

Unit \_\_\_\_\_

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY  
COPY RETAINED DISTRICT OFFICE  
~~ORIGINAL FORWARDED TO CASPER~~

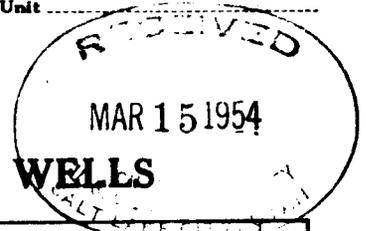

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....
NOTICE OF INTENTION TO ABANDON WELL.....	<u>Subsequent report of events</u> <b>X</b>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

July 1 to Jan 1, 1954, 1954

Well No. 1 is located 215 ft. from N line and 350 ft. from E line of sec. 20

SE 1/4 of SW 1/4 Sec. 20 Twp. 22 S. R. 19 E. SLBM  
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Grand Utah  
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is \_\_\_\_\_ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Drilling suspended, further drilling with cable tools considered not feasible with cable tools due to caving of the hole. Cable tools moved off by International Drilling and Development Co. as of July 29th. Mr. D. M. Linney reported the hole to be in drillable condition and not to exceed three degrees off perpendicular and that 25 sacks of cement and some water had been put down the hole to prevent further caving also that a steel cap had been welded on the casing. Well site fenced August 2nd. Seeking competent driller with rotary equipment to reach objective, the paradox formation, estimated 3,500 to 4,000 feet.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Grand Pyramid Oil, Inc.

Address 1563 So. 2nd. West

Salt Lake City, Utah.

*No need to approve*  
By W. W. Magnuson

Approved \_\_\_\_\_

Title Secretary

Turn 22 S. R. 19 E. - R#1  
 SE 1/4 22 S 19 E



GRAND PYRAMID #1 LOG


1-00151

<u>Footage</u>	<u>Formation</u>	<u>Composition and Color</u>
1 - 29	Mancos shale	Gray
29 - 30	" "	Sandy
30 - 45	" "	Yellowish in color
45 - 63	" "	Sandy
63 - 70	" "	Bluish in color
70 - 85	" "	Gray
85 - 105	" "	Gray
105 - 126	" "	Gray
126 - 135	" "	Gray
135 - 185	" "	Blue color
185 - 220	" "	Blue color
220 - 275	" "	Blue shale
275 - 335	" "	" "
335 - 405	" "	" "
405 - 415	" "	" "
415 - 430	Sandy shale	Sand stringers
430 - 440	" "	" "
440 - 485	Mancos shale	Blue color
485 - 525	" "	Dark color
525 - 565	" "	" "
565 - 600	" "	Some streaks of Bentonite present.
600 - 642	" "	Dark blue
642 - 670	" "	" "
670 - 690	" "	Gray color
690 - 705	" "	" "
705 - 730	" "	Blue color
730 - 770	" "	Gray color
770 - 810	" "	Blue color
810 - 850	" "	Bentonite, clay & shale
850 - 880	" "	Bluish shale

<u>Footage</u>	<u>Formation</u>	<u>Composition and Color</u>
880 - 915	Mancos shale	Bluish shale
915 - 950	" "	" "
950 - 985	" "	Show of gas
985 - 1035	Sandy shale	Show of gas and black oil
1035 - 1080	Mancos shale	Bluish shale
1095 - 1130	" "	Some clay
1130 - 1175	" "	Dark specks in sample
1175 - 1205	" "	Bluish gray
1205 - 1240	" "	Blue
1240 - 1270	" "	Blue
1270 - 1303	" "	Blue
1303 - 1320	" "	Blue
1320 - 1340	" "	Blue
1340 - 1370	" "	Blue
1370 - 1390	" "	Blue
1390 - 1405	Sand and Gravel shale	Gravel and conglomerate, Possibly top of Dakota
1405 - 1420	Shale and sandy gravel	" " " " "
1420 - 1430	" " " "	" " " " "

Shut down to move in rotary rig






(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office Utah  
License No. 05151 A  
Unit \_\_\_\_\_

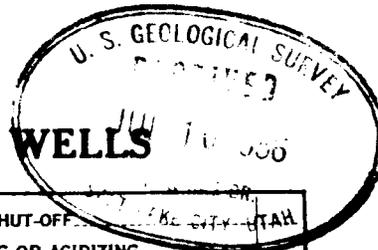

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL		SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING	<input checked="" type="checkbox"/>	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

**Grand Pyramid**

July 9th., 1956

Well No. 1. is located 215 ft. from S line and 2249 ft. from W line of sec. 20

SESE, SW 1/4 22 S., 19 E. SLBM.

Crescent Grand County Utah.

**Altimeter**

The elevation of the derrick floor above sea level is 4650 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Plug and Abandon, pull casing as specified by USGS. Plug bottom of hole with 25 sacks of cement and plug at top of hole, beginning below bottom of surface casing to surface with 25 sacks of cement or amount necessary. (Surface casing 126' 1 3/4", 42.5 lb.) Encase 4" pipe in cement with 4 feet extended above surface, weld cap on top and inscribe on pipe or paint, location, F. D., date spudded in and date abandonment. *NAME OF OPERATOR, LICENSE NUMBER.*


The hole was drilled by D. M. Linney Drilling Co. Spudded in April 21, 1953. F. D. reported by Linney, 1430 feet? Rig moved off July 29, 1951. There is approximately 1170 feet of 10 & 3/4" 42.5 lb. straight end welded casing in the hole. The hole has caved back to 1176 feet as reported by Halliburton Oil Well Cementing Co. directional indicator. 5 degrees off perpendicular at 1166 feet.

Company Grand Pyramid Oil, Inc.  
Address 1563 So. 2nd. West  
Salt Lake City, Utah.  
By W. W. Magnuson  
District Engineer  
Secretary - Treasurer  
Title \_\_\_\_\_

Approved JUL 11 1956  
*[Signature]*  
District Engineer


14

U. S. LAND OFFICE Utah  
SERIAL NUMBER 05151 A  
LEASE OR PERMIT TO PROSPECT \_\_\_\_\_

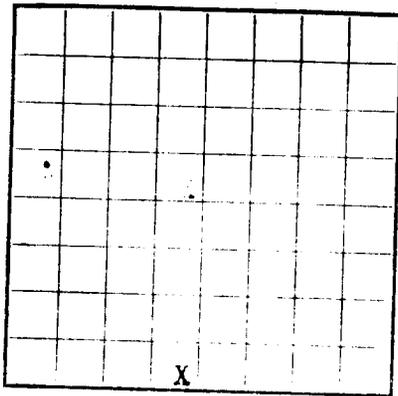

LOCATE WELL CORRECTLY

UNITED STATES GEOLOGICAL SURVEY  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

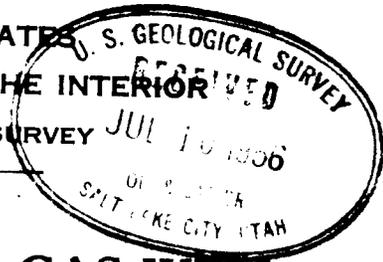

COPY FORWARDED TO \_\_\_\_\_

LOG OF OIL OR GAS WELL

Company Grand Pyramid Oil, Inc. Address Salt Lake City  
Lessor or Tract Grand Pyramid Oil, Inc. Field Crescent State Utah  
Well No. 1 Sec. 20 T. 22 S. R. 19E Meridian S104 County Grand County  
Location 215 ft. N of S Line and 2289 ft. E of W Line of sec. 20 Elevation 4030  
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed \_\_\_\_\_  
Date July 9, 1956. Title Secretary - Treasurer

The summary on this page is for the condition of the well at above date.

Commenced drilling April 21, 1953 Finished drilling July 30, 1953, 19\_\_

OIL OR GAS SANDS OR ZONES

(Denote gas by G)  
No. 1, from 950 to 985 SNOW No. 4, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from 985 to 1035 & Black No. 5, from \_\_\_\_\_ to \_\_\_\_\_  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ SNOW No. 6, from \_\_\_\_\_ to \_\_\_\_\_

IMPORTANT WATER SANDS

No. 1, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_  
No. 4, from \_\_\_\_\_ to \_\_\_\_\_

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	From-To		Purpose
							From-	To-	
10 5/8"	22.5	4	126						
10 5/8"	22.5	4	1176						

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
13 1/2"	Surface	75 sacks cement			

ORIGINAL FORWARDED TO \_\_\_\_\_

Heaving plug Material \_\_\_\_\_  
Depth set \_\_\_\_\_

FOLD MARK

Size	Shell used	Drive used	Quantity	Date	Dep. set	Depth cleaned out

**TOOLS USED**

Rotary tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

Cable tools were used from surface feet to 1430.7 feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

**DATES**

\_\_\_\_\_, 19\_\_\_\_ Put to producing \_\_\_\_\_, 19\_\_\_\_

The production for the first 24 hours was 20 barrels of fluid of which \_\_\_\_\_% was oil; \_\_\_\_\_% emulsion; \_\_\_\_\_% water; and \_\_\_\_\_% sediment. Gravity, °Bé. \_\_\_\_\_

If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_

Rock pressure, lbs. per sq. in. \_\_\_\_\_

**EMPLOYEES**

\_\_\_\_\_, Driller \_\_\_\_\_, Driller  
D. M. Linney, Driller \_\_\_\_\_, Driller  
George Credfoott

**FORMATION RECORD**

FROM-	TO-	TOTAL FEET	FORMATION
1'	20	20'	tancoos shale
20	30	10	" "
30	45	15	" "
45	63	18	" "
63	70	7	" "
70	85	15	" "
85	105	20	" "
105	126	21	" "
126	135	9	" "
135	145	10	" "
145	155	10	" "
155	170	15	" "
170	185	15	" "
185	200	15	" "
200	275	75	tancoos shale
275	405	130	" "
405	415	10	" "
415	430	15	" "
430	440	10	" "
440	445	5	" "
445	525	80	tancoos shale
525	565	40	" "
565	600	35	" "
600	642	42	" "
642	670	28	" "
670	690	20	" "
690	705	15	" "

(OVER)

FORMATION RECORD - CONTINUED

### FORMATION RECORD—Continued

FROM	TO	TOTAL FEET	FORMATION
705	730	25	Mancoos shale
730	770	40	" "
770	810	40	" "
810	850	40	" "
850	880	30	" "
880	915	35	" "
915	950	35	" "
950	985	35	" "
985	1015	30	" "
1015	1035	20	" "
1035	1080	45	" "
1080	1110	30	" "
1110	1130	20	" "
1130	1175	45	" "
1175	1205	30	" "
1205	1240	35	" "
1240	1270	30	" "
1270	1303	33	" "
1303	1320	17	" "
1320	1340	20	" "
1340	1370	30	" "
1370	1390	20	" "
1390	1405	15	" "
1405	1420	15	Sand & Gravel Shale
1420	1430	10	" "

Shut down

LOGS


**HISTORY OF OIL OR GAS WELL**

It is of the greatest importance to have a complete history of the well. Please state in detail the dates of redrilling, together with the reasons for the work and its results. If there were any changes made in the casing, state fully, and if any casing was "sidetracked" or left in the well, give its size and location. If the well has been dynamited, give date, size, position, and number of shots. If plugs or bridges were put in to test for water, state kind of material used, position, and results of pumping or bailing.

This well was commenced with 36" hole and 12' of conductor pipe was set therein. A 15 inch hole was then drilled to 126 feet with 1 3/4", 48 lb pipe set therein. A 15 inch hole was drilled to 1303 feet with 1176 feet of 10 3/4 inch, 42.5 lb. casing set to that depth. The hole was carried down from 1303 feet to 1430 feet? The hole started caving and caved back to 1176 feet, bottom of casing.

75 sacks of cement were used to cement surface casing to 126 feet.

The 1176 feet of casing in hole is not threaded. Is plain end welded.

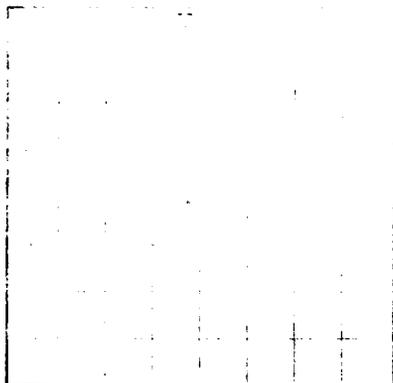

**HISTORY OF OIL OR GAS WELL**

GEOLOGICAL SURVEY

DEPARTMENT OF THE INTERIOR

UNITED STATES

RECEIVED BY BUREAU OF GEOLOGICAL SURVEY  
RECEIVED NUMBER  
RECEIVED (OFFICE)



(SUBMIT IN TRIPLICATE)

Land Office **Salt Lake City**

Lease No. **05151-4**

Unit

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

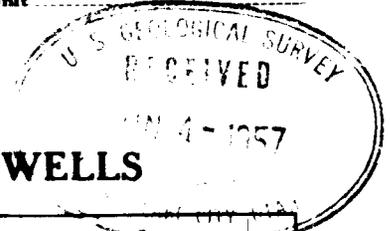

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT	<input checked="" type="checkbox"/>
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

June 4, 1957

Well No. **1** is located **215** ft. from **N** line and **2289** ft. from **W** line of sec. **20**

**Sec. 20, SE 1/4** **22 S.** **19 E.** **S18M**  
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
**Crescent Jct.** **Grand County** **Utah**  
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is **4630** ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

John Moore, Drilling Contractor, Provo, Utah commenced work to plug and abandon well on April 20, 1957. Being unable to get casing started, put in 25 sack cement plug at T. D. 1176'. Bad weather prevented continuous work. Shot off casing at 900' and set plug with 20 sacks cement. Casing parted at 750'. At this point the casing was swelled and showed evidence as having been shot before well was capped in 1953. At 135' a plug was set with 25 sacks cement, 5 sacks cement used to plug and set 4' marker at surface. Pit was filled and work completed May 17, 1957.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **Grand Pyramid Oil, Inc**

Address **1563 So. 2nd. West**

**Salt Lake City, Utah** JUN 20 1957 By *W. W. Magnuson*

Approved: *[Signature]* Title **Secretary - Treasurer**  
U.S. Geological Survey District Engineer ORIGINAL FORWARDED TO CASPER