

Petroglyph Operating Co., Inc.
P.O. Box 607
Roosevelt, UT 84066

December 23, 2003

Utah Division of Oil, Gas, & Mining
1594 West North Temple, Suite 1210
Box 145801
Salt Lake City, UT 84114-5801

RE: APPLICATION FOR PERMIT TO DRILL
UTE TRIBAL #20-140
SW/SW, SEC. 20, T5S, R3W, U.S.B.&M.
DUCHESNE COUNTY, UTAH
LEASE NO.: BIA 14-20-H62-3515
UTE INDIAN TRIBAL LANDS

Enclosed please find a copy of the Application for Permit to Drill and associated attachments for the referenced well.

Please address further communication regarding this matter (including approval) to:

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Phone: (435)789-4120
Fax: (435)789-1420

RECEIVED

JAN 14 2004

DIV. OF OIL, GAS & MINING

Sincerely,



Ed Trotter
Agent
Petroglyph Operating Co., Inc.

Attachments

EIGHT POINT PLAN

UTE TRIBAL 20-140
SE/SW, SEC. 20, T5S, R3W
DUCHESNE COUNTY, UTAH

1. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:

FORMATIONS	DEPTH	SUBSEA
Mahogany Shale	2934.4	3412
"X" Marker	4514.4	1832
Douglas Creek	4654.4	1692
"B" Limestone	5036.4	1310
B/Castle Peak Limestone	5596.4	750
Total Depth	6000	386
Anticipated BHP	2535	

2. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS FORMATIONS:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>	<u>Subsea</u>
Oil/Gas	Douglas Creek	4654.4	1692
Oil/Gas	B/Castle Peak	5596.4	750
Other mineral zones	N/A		

3. PRESSURE CONTROL EQUIPMENT: BOP Schematic Diagram attached.

4. CASING PROGRAM:

<u>HOLE SIZE</u>	<u>INTERVAL</u>	<u>LENGTH</u>	<u>SIZE</u>	<u>WEIGHT</u>	<u>GRADE</u>	<u>MINIMUM SAFETY FACTOR</u>		
						<u>COLLAPSE</u>	<u>BURST</u>	<u>TENSILE</u>
12 1/4"	0 - 280'	280'	8 5/8"	24.0#	J-55	1370 PSI	2950 PSI	263,000#
7 7/8"	0 - 6000'	6000'	5 1/2"	15.5#	J-55	4040 PSI	4810 PSI	239,000#

All casing will be new or inspected.

5. MUD PROGRAM

<u>INTERVAL</u>	<u>MUD TYPE</u>
0' - 250'	Air
250 - 4000'	Air/Mist & Aerated Water
4000' - TD	Air/3% KCL water or KCL substitute
TD	Gel/polyacrylamide polymer w/5-10% LCM

Sufficient mud inventory will be maintained on location during drilling to handle any adverse conditions that may arise.

EIGHT POINT PLAN

**UTE TRIBAL 20-140
SE/SW, SEC. 20, T5S, R3W
DUCHESNE COUNTY, UTAH**

6. CEMENT PROGRAM:

12 1/4"	J-55	8 5/8"	24.0#	280'	165 SX CLASS "G" + 2% CaCl2 + 1/4 # /SX CELLOFLAKE (YIELD 1.18 CU FT/SX)
7 7/8"	J-55	5 1/2"	15.5#	6000'	LEAD: 130 SX CLASS "G" + 12% GEL + 5% SALT + 1/4 #/SX CELLOFLAKE (3.82 CU.FT/SX) TAIL: 365 SX CLASS "G" + 10% GYPSUM + 1/4 #/SX CELLOFLAKE (1.60 CU FT/SX)

7. VARIANCE REQUESTS:

- A. Petroglyph Operating Company, Inc. requests a variance to regulations requiring a straight run blooie line.
- B. Petroglyph Operating Company, Inc. requests a variance to regulations requiring an automatic ignitor or continuous pilot light on the blooie line.

5. EVALUATION PROGRAM:

Logs: Platform Express TD to base of surface casing
(DLL, MSFL, CNG, CDL, GR)

Cores: None anticipated
DST: None Programmed

Completion: To be submitted at a later date.

6. ABNORMAL CONDITIONS:

None anticipated.


7. STANDARD REQUIRED EQUIPMENT:

None Required


8. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

(Attachment: BOP Schematic Diagram)

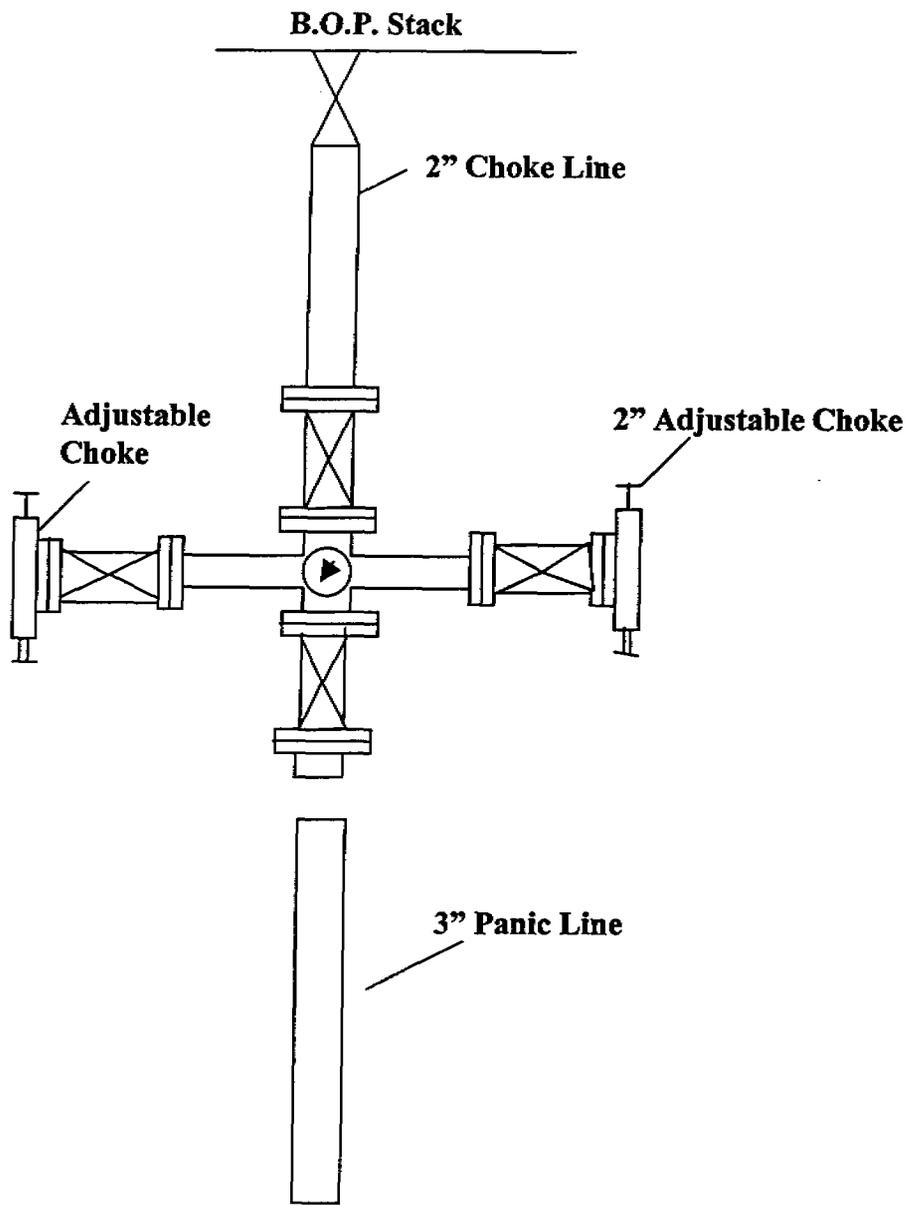

BLM #2000 Choke Manifold System

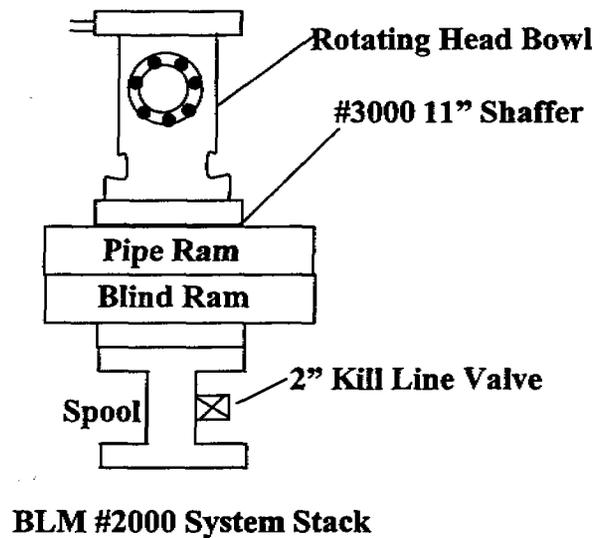

**CONDITIONS OF APPROVAL
FOR THE SURFACE USE PROGRAM OF THE
APPLICATION FOR PERMIT TO DRILL**

Company/Operator: Petroglyph Operating Co. Inc.
Well Name & Number: Ute Tribal #20-140
Lease Number: BIA 14-20-H62-3515
Location: 42' FSL & 1374' FWL, SE/SW,
Sec. 20, T5S, R3W, U.S.B.&M.,
Duchesne County, Utah
Surface Ownership: Ute Indian Tribe

NOTIFICATION REQUIREMENTS

Location Construction - forty-eight (48) hours prior to construction of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice: - at least twenty-four (24) hours prior to spudding the well.

Casing String and Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.

BOP and related Equipment Tests - twenty-four (24) hours prior to running casing and tests.

First Production Notice - within five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

State of Utah
Division of Oil, Gas & Mining
1594 West North Temple
Box 145801
Salt Lake City, UT 84114-5801

January 21, 2004

Re: Application for Exception Well Location
Proposed Ute Tribal 20-140
Township 5 South, Range 3 West
Section 20: ~~SW/4~~ SW/4
Duchesne County, Utah


Petroglyph Operating Company Inc. (Petroglyph) respectfully requests administrative approval per R-649-3-3 to drill the Ute Tribal 20-140 at a location 42' FSL & 1374' FWL, ~~SW/4~~ SW/4, Section 20, Township 5 South, Range 3 West, Duchesne County, Utah.

Petroglyph Operating Company Inc. holds 100% of the operating rights within a 460' radius of the requested well site.

Petroglyph respectfully requests the Division of Oil, Gas and Mining Administratively grant this application for the exceptional well location at its earliest opportunity so that drilling operations can resume.

Please direct further correspondence and approval to myself at P.O. Box 1910, Vernal, Utah 84078 , or phone me at 435-789-4120

Sincerely,



Ed Trotter, Agent
Petroglyph Operating Company Inc.

RECEIVED

JAN 22 2004

DIV. OF OIL, GAS & MINING

January 21, 2004

Diana Whitney
Petroleum Technician
Oil and Gas Conservation Division
Utah Division of Oil, Gas, & Mining
1594 West North Temple, Suite 1210
P.O. Box 145801
Salt Lake City, UT 84114-5801

Re: Applications for Exceptional Well Locations

Dear Ms. Whitney,

As you requested, enclosed please find five applications for Exception Well Spacing for the following Petroglyph Operating Co., Inc. wells:

Ute Tribal 20-14O
Ute Tribal 20-13N
Ute Tribal 20-12M
Ute Tribal 29-11L
Ute Tribal 29-06G

If there is any further information you require, please call (435)789-4120.

Thank you for your attention to this matter.



Ed Trotter
Agent
Petroglyph Operating Co., Inc.
P.O. Box 1910
Vernal, UT 84078

Enclosures (5)

RECEIVED

JAN 22 2004

DIV. OF OIL, GAS & MINING

THIRTEEN POINT SURFACE USE PROGRAM

1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 21 miles southwest of Myton, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

2. PLANNED ACCESS ROAD

- A. The access road will be approximately 0.1 miles in length. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/ 18 foot running surface.
- C. Maximum grade on access road will be 8%.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No culverts, bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

All travel will be confined to existing access road Right-of-Way.

Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service Publication: Surface Operating Standards For Oil & Gas Exploration and Development, (1989).

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of-Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed

during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, Petroglyph Operating Co., Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

3. **LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION**

- A. Abandoned wells - 18*
- B. Temporarily abandoned wells - 2*
- C. Producing wells - 21*
- D. Shut in wells - 3*

(*See attached TOPO map "C" for location)

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

A. **ON WELL PAD**

- 1. Production facilities - To be submitted later

B. **OFF WELL PAD**

- 1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
- 2. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.
- 3. A 4 1/2" OD steel above ground production pipeline will be laid approximately 1700' from proposed location to a point in the SW/SW of Section 20, T5S, R3W, where it will tie into Petroglyph Operating Co. Inc.'s existing pipeline. Proposed pipeline crosses Ute Tribe lands, thus a Right-of -Way grant will be required. See attached TOPO Map "D" showing pipeline route.
- 4. Proposed pipeline will be a 4 1/2 " OD steel, welded line laid on the surface.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery, unless more stringent protective requirements are deemed necessary by the authorized officer.

The production facilities will be placed on the South side of the location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities required will be painted within 6 months of installation. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.
The required paint color is Desert Brown.

5. **LOCATION & TYPE OF WATER SUPPLY**

- A. Water supply will be from Target Trucking's Roosevelt Brine Storage and/or Target's water source in SE ¼, Sec. 1, T4S, R5W, Duchesne, Utah (State Water Right #43-10152). All water will come from a non-depletable source.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. **SOURCE OF CONSTRUCTION MATERIAL**

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. All construction material will come from Ute Tribal Land.
- C. No mineral materials will be required.

7. **METHODS OF HANDLING WASTE DISPOSAL**

A. **METHODS AND LOCATION**

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at an approved waste disposal facility.
- 4. Produced waste water will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. During the 90 day period, an application for approval of a permanent disposal method and location, together with the required water analysis, will be submitted for the AO's approval.
- 5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.

- B. Water from drilling fluids and recovered during testing operations will be

disposed of by either evaporating in the reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

Burning of trash will not be allowed. All trash must be contained in a trash cage and hauled away to an approved disposal site at the completion of the drilling activities.

On BIA administered land:

All reserve pits will be lined with either native clay, commercial bentonite or plastic sufficient to prevent seepage. (If a plastic nylon reinforced liner is used, it shall be torn and perforated after the pit dries and before backfilling of the reserve pit).

A 12 mill liner shall be installed in the reserve pit.

___ To protect the environment:

If the reserve pit is lined, the operator will provide the BIA with a chemical analysis of the fluids in that pit no later than 90 days after the well completion to determine the method for final reclamation of the reserve pit. If the elemental concentrations shown by the chemical analysis exceeds the requirements described by Part II, Standards of Quality for Waters of the State, Wastewater Disposal Regulations, State of Utah Division of Health, the contents and liner will be removed and disposed of at an authorized disposal site.

___ To protect the environment (without chemical analysis), reserve pits will be constructed so as not to leak, break, or allow discharge of liquids.

___ Storage tanks will be used if drill sites are located on tribal irrigable land, flood plains, or on lands under crop production. After first production, produced waste water will be confined to a lined pit or storage tank for a period not to exceed ninety (90) days. During the 90 day period, in accordance with NTL-2B, an application for approval of a permanent disposal method and location, along with required water analysis, shall be submitted for the AO's approval. Failure to file an application within the time allowed will be considered an incident of noncompliance.

7. ANCILLARY FACILITIES

- No airstrips or camps are planned for this well.

9. WELLSITE LAYOUT

- A. Refer to attached well site plat for related topography cuts and fills and cross Sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.

- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The reserve pit will be located on the West side of the location. The flare pit will be located downwind of the prevailing wind direction on the West side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled topsoil will be stored South and just North of Corner #6 of the location.

Access to the well pad will be from the North.

Corners #4, #6, & #8 will be rounded off to minimize excavation.

10. FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BIA or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is to be regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently mounted on concrete bases. Prior to crossing any fence located on Tribal land, or any fence between Tribal land and private land, the operator will contact the BIA, who will in turn contact the

grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

11. PLANS FOR RESTORATION OF SURFACE

A. PRODUCING LOCATION

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 120 days from the date of well completion (weather permitting). Before any dirt work takes place, the reserve pit will be completely dry and all cans, barrels, pipe, fluid, and hydrocarbons, will be removed.

Contact appropriate surface management agency for required seed mixture.

B. DRY HOLE/ABANDONED LOCATION

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BIA will attach the appropriate surface rehabilitation conditions of approval.

ON BIA ADMINISTERED LANDS:

Abandoned well sites, roads, or other disturbed areas will be restored to near their original condition. This procedure will include: (a) reestablishing irrigation systems where applicable, (b) reestablishing soil conditions in irrigated fields in such a way as to ensure cultivation and harvesting of crops and, © ensuring revegetation of the disturbed areas to the specifications of the Ute Indian Tribe or the BIA at the time of abandonment.

12. SURFACE OWNERSHIP

Access road: Ute Indian Tribe

Location: Ute Indian Tribe

13. OTHER INFORMATION

A. Petroglyph Operating Co., Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly

disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:

- whether the materials appear eligible for the National Register of Historic Places;
- the mitigation measures the operator will likely have to undertake before the site can be used.
- a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

- B. As operator, Petroglyph Operating Co., Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BIA, or the appropriate County Extension Office. On BIA administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.
- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on Tribal Lands after the conclusion of drilling operations or at any other time without BIA authorization. However, if BIA authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

On BIA administered land:

Operator's employees, including subcontractors, will not gather firewood along roads constructed by operators. If wood cutting is required, a permit will be obtained from the Forestry Department of the BIA pursuant to 25 CFR 169.13 "Assessed Damages Incident to Right-of-Way authorization". All

operators, subcontractors, vendors, and their employees or agents may not disturb saleable timber (including firewood) without a duly granted wood permit from the BIA Forester.

If the surface rights are owned by the Ute Indian Tribe and mineral rights are owned by another entity, an approved right-of-way will be obtained from the BIA before the operator begins any construction activities. If the surface is owned by another entity and the mineral rights are owned by the Ute Indian Tribe, rights-of-way will be obtained from the other entity.

All roads constructed by operators on the Uintah and Ouray Indian Reservation will have appropriate signs. Signs will be neat and of sound construction. They will state: (a) that the land is owned by the Ute Indian Tribe, (b) the name of the operator, (c) that firearms are prohibited to all non-Ute Tribal members, (d) that permits must be obtained from the BIA before cutting firewood or other timber products, and (e) only authorized personnel permitted. All well site locations on the Uintah and Ouray Indian Reservation will have an appropriate sign indicating the name of the operator, the lease serial number, the well name and number, the survey description of the well (either footage or the quarter-quarter section, the section, township, and range).

14. Additional Surface Stipulations

None

LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION

PERMITTING

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Telephone: (435)789-4120
Fax: (435)789-1420

OPERATIONS

Steve Wall
P.O. Box 607
Roosevelt, UT 84066
(435)722-2531
(435)722-9145

All lease or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. Petroglyph Operating Co., Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.

The BIA office shall be notified upon site completion prior to moving on the drilling rig.

Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions that presently exist; that the statements made in the Plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Petroglyph Operating Co., Inc. and its contractors and subcontractors in conformity with this Plan and the terms and conditions under which it is approved.

12-23-2003
Date


Ed Trotter, as Agent for
Petroglyph Operating Co., Inc.

PETROGLYPH OPERATING CO., INC.
UTE TRIBAL #20-140
SECTION 20, T5S, R3W, U.S.B.&M.

PROCEED IN A SOUTHWESTERLY DIRECTION FROM MYTON, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 8.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 6.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN LEFT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 1.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 0.6 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 3.4 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE SOUTH; FOLLOW ROAD FLAGS IN A SOUTHERLY DIRECTION APPROXIMATELY 0.1 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM MYTON, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 21.0 MILES.

PETROGLYPH OPERATING CO., INC.

UTE TRIBAL #20-140
LOCATED IN DUCHESNE COUNTY, UTAH
SECTION 20, T5S, R3W, U.S.B.&M.

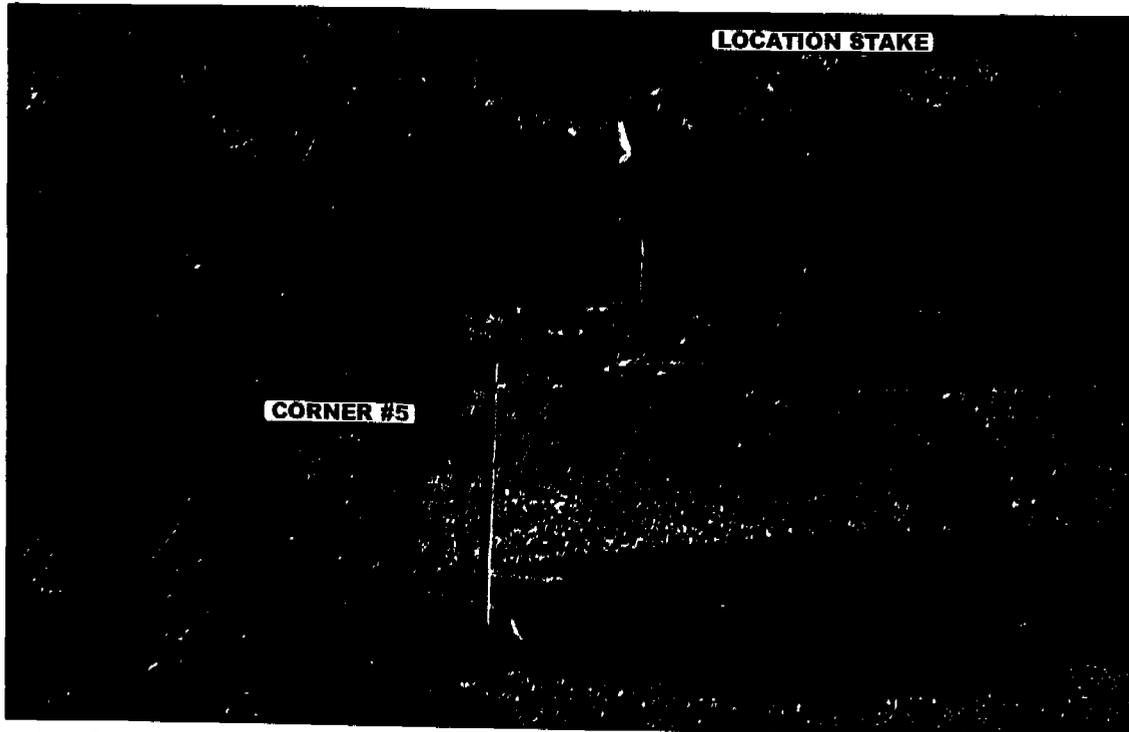


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: EASTERLY

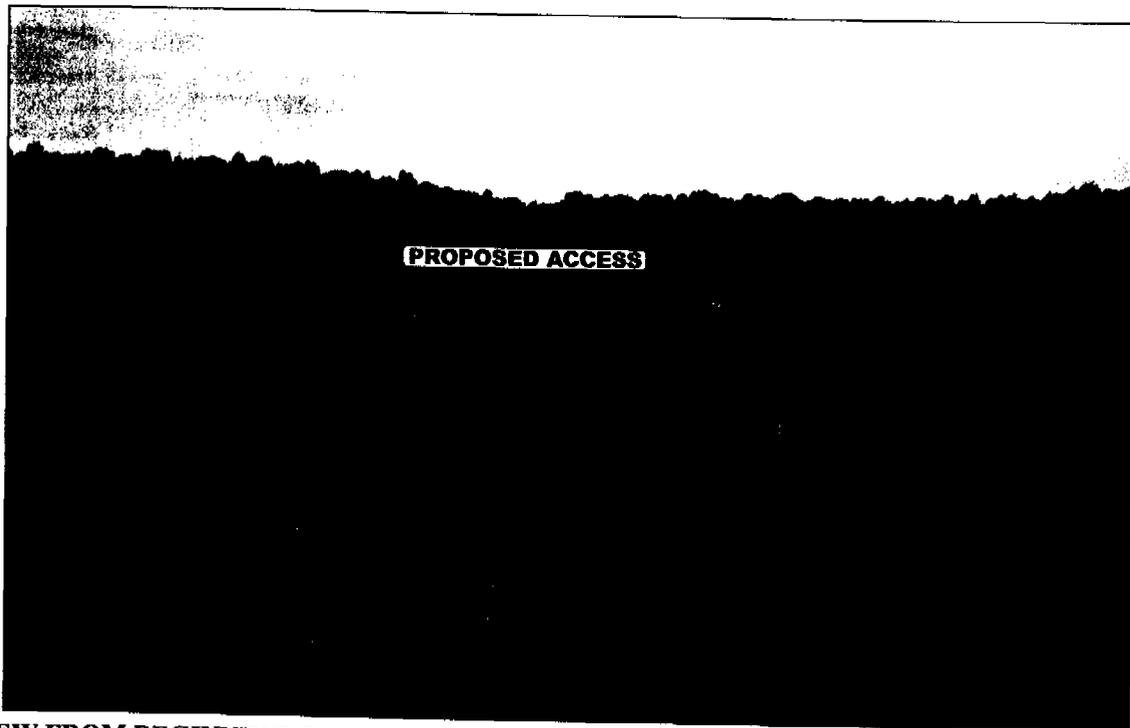


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: SOUTHERLY



UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

11	4	03
MONTH	DAY	YEAR

PHOTO

TAKEN BY: GS.


DRAWN BY: J.L.G.

REVISED: 00-00-00

TROGLYPH OPERATING CO. INC.

LOCATION LAYOUT FOR


UTE TRIBAL #20-140
SECTION 20, T5S, R3W, U.S.B.&M.
42' FSL 1374' FWL



SCALE: 1" = 50'
DATE: 10-30-03
Drawn By: D.COX

NOTE:
Flare Pit is to be located a min. of 100' from the Well Head.

NOTE:
Pit Capacity W/2' of Freeboard is ±4,600 Bbls.

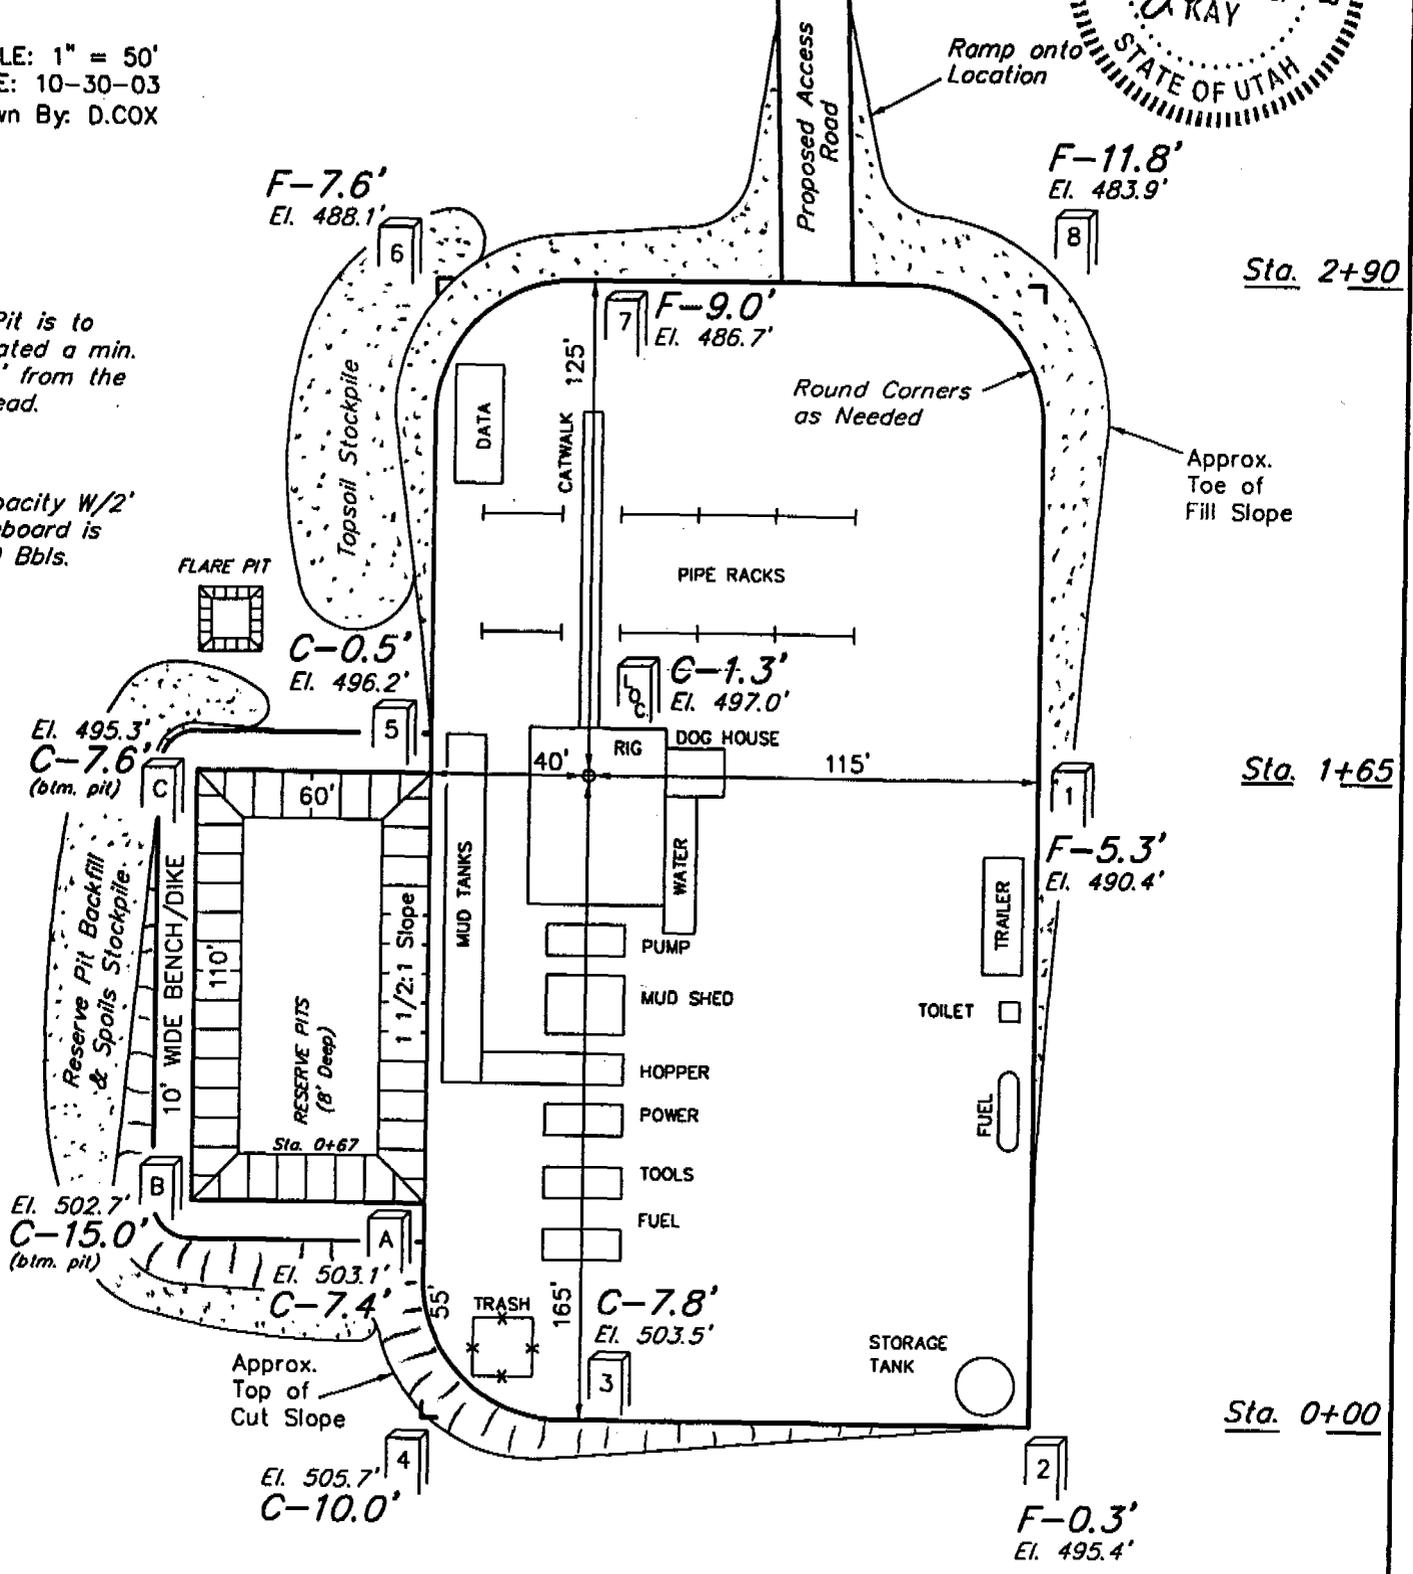

NOTES:

Elev. Ungraded Ground At Loc. Stake = 6497.0'
FINISHED GRADE ELEV. AT LOC. STAKE = 6495.7'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017





PROGLYPH OPERATING CO. INC.

TYPICAL CROSS SECTIONS FOR

UTE TRIBAL #20-140
SECTION 20, T5S, R3W, U.S.B.&M.
42' FSL 1374' FWL

1" = 20'
X-Section Scale
1" = 50'

DATE: 10-30-03
Drawn By: D.COX

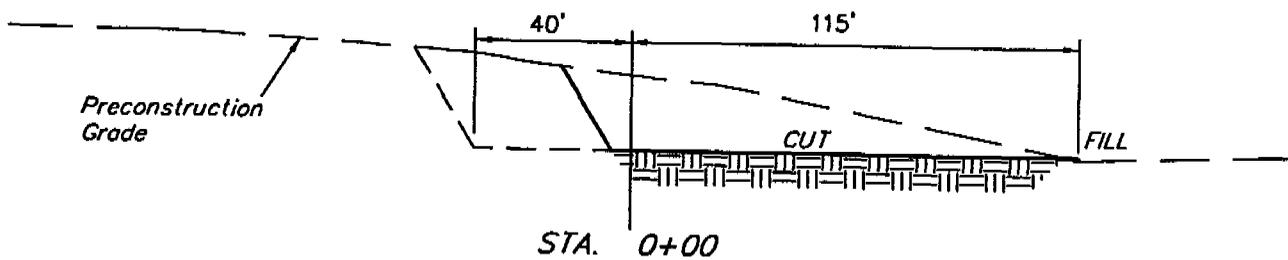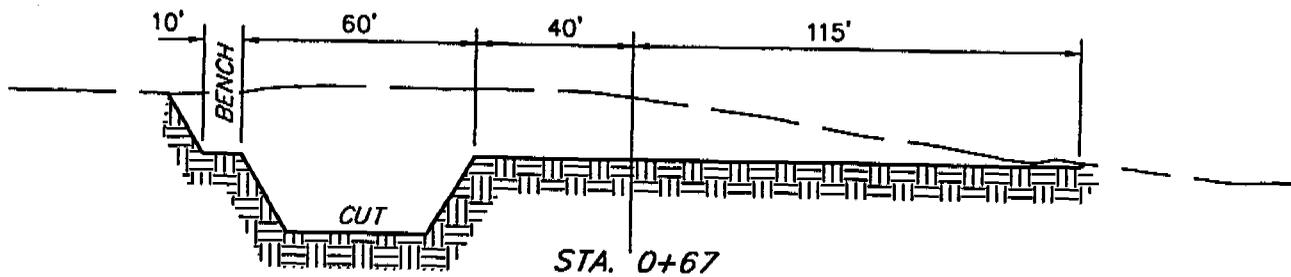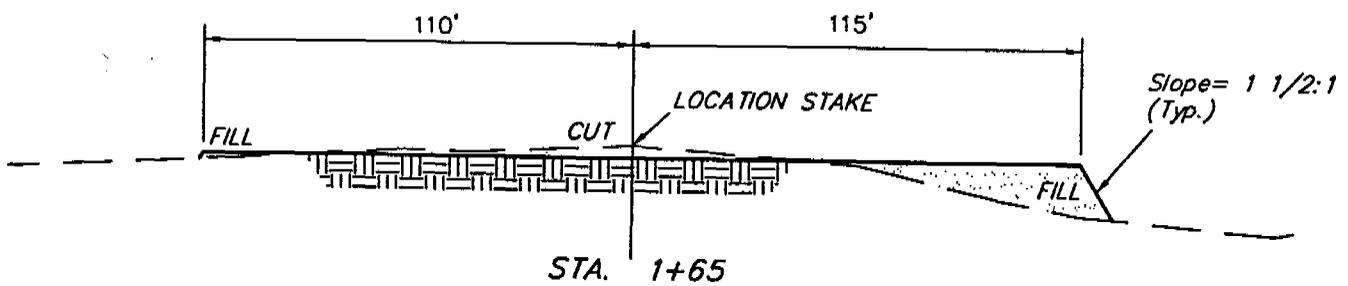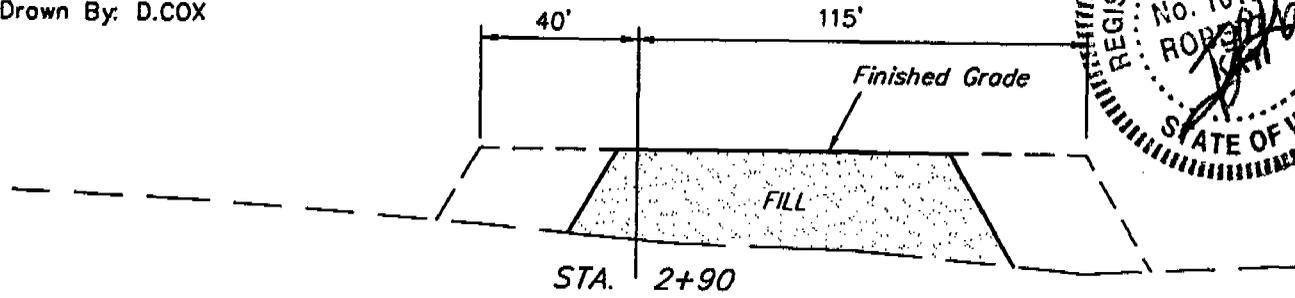


APPROXIMATE YARDAGES

CUT	
(12") Topsoil Stripping	= 2,000 Cu. Yds.
Remaining Location	= 4,870 Cu. Yds.
TOTAL CUT	= 6,870 CU.YDS.
FILL	= 3,960 CU.YDS.

EXCESS MATERIAL AFTER 5% COMPACTION	= 2,700 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 2,700 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

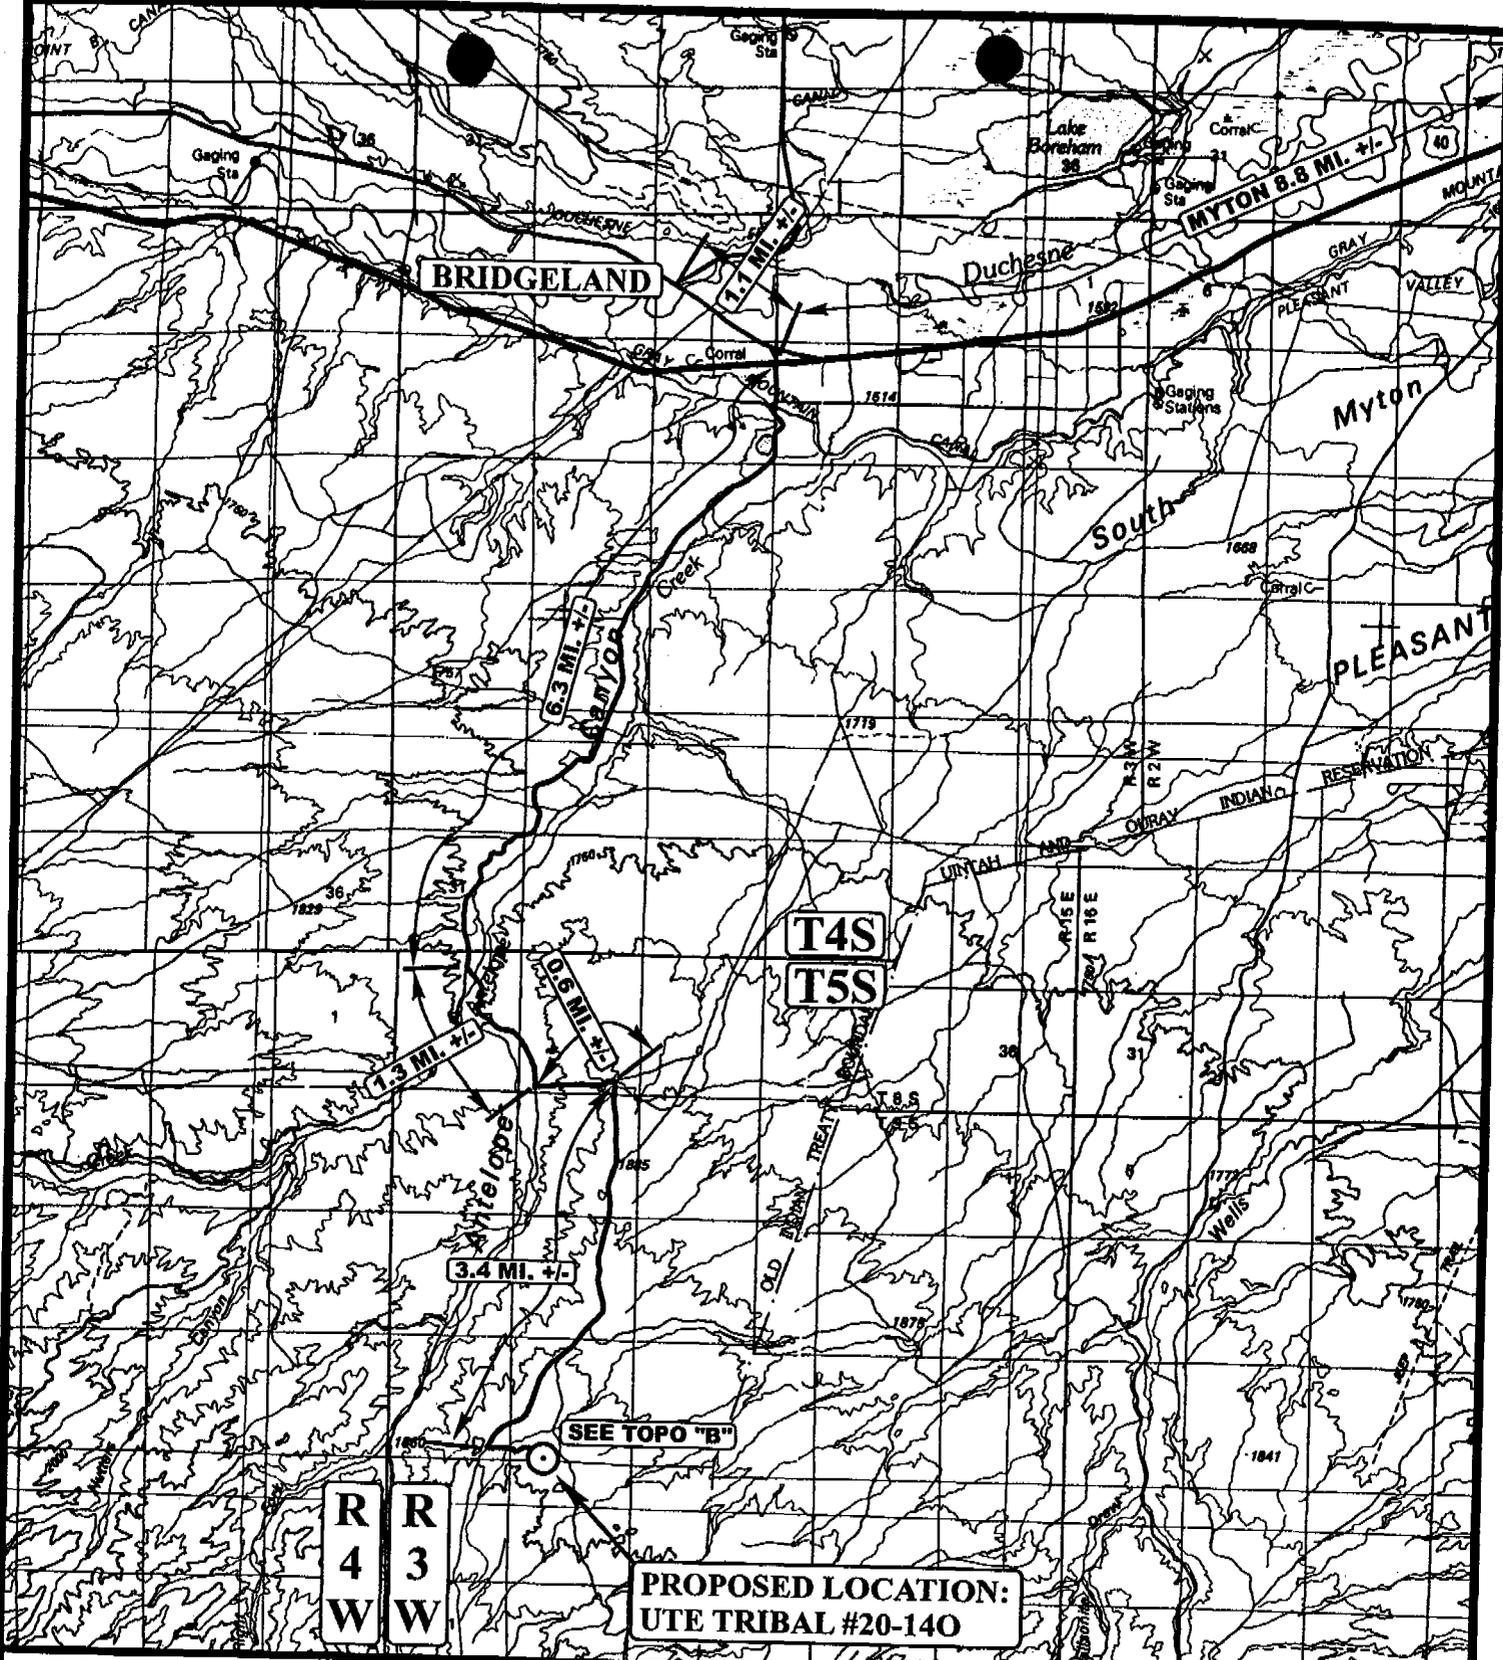

LEGEND:
 ○ PROPOSED LOCATION

UES Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



PETROGLYPH OPERATING CO., INC.
 UTE TRIBAL #20-140
 SECTION 20, T5S, R3W, U.S.B.&M.
 42' FSL 1374' FWL

TOPOGRAPHIC MAP 11 | 4 | 03
 MONTH | DAY | YEAR
 SCALE: 1:100,000 | DRAWN BY: J.L.G. | REVISED: 00-00-00



T5S

BRIDGELAND 12.7 MI. +/-
MYTON 20.4 MI. +/-

PROPOSED ACCESS 0.1 MI. +/-

PROPOSED LOCATION:
UTE TRIBAL #20-140

R
4
W

R
3
W

LEGEND:

- EXISTING ROAD
- - - - - PROPOSED ACCESS ROAD

PETROGLYPH OPERATING CO., INC.

UTE TRIBAL #20-140
SECTION 20, T5S, R3W, U.S.B.&M.
42' FSL 1374' FWL

U E I S
Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC 11 4 03
MAP MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: J.L.G. REVISED: 00-00-00

B
TOPO

T5S

PROPOSED LOCATION:
UTE TRIBAL #20-140

R
4
W

R
3
W

LEGEND:

- DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

PETROGLYPH OPERATING CO., INC.

UTE TRIBAL #20-140
SECTION 20, T5S, R3W, U.S.B.&M.
42' FSL 1374' FWL

U&L S
Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813




TOPOGRAPHIC
MAP

11	4	03
MONTH	DAY	YEAR

SCALE: 1" = 2000' | DRAWN BY: J.L.G. | REVISED: 00-00-00



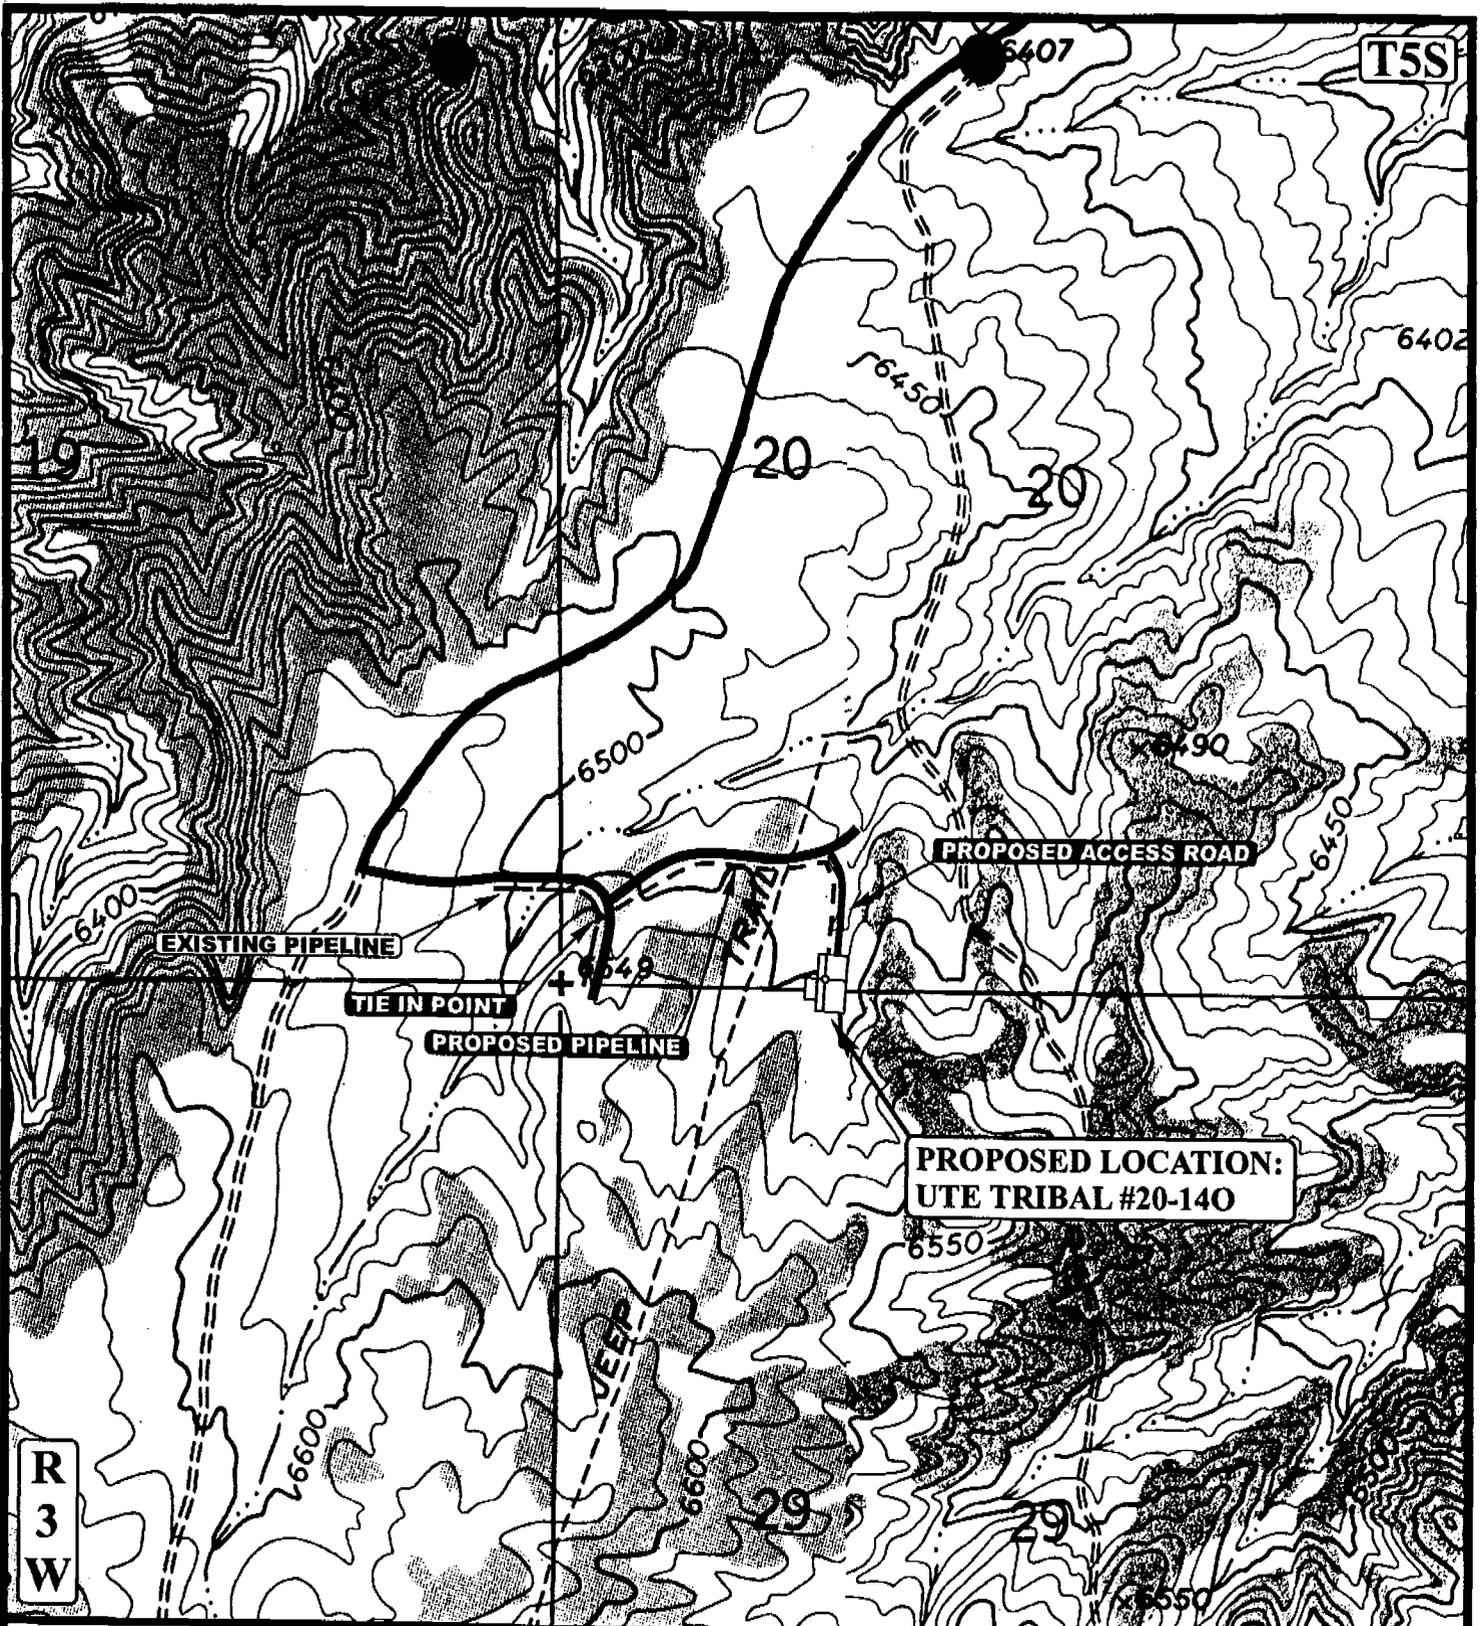

APPROXIMATE TOTAL PIPELINE DISTANCE = 1,700' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- PROPOSED PIPELINE



PETROGLYPH OPERATING CO., INC.

UTE TRIBAL #20-140
SECTION 20, T5S, R3W, U.S.B.&M.
42' FSL 1374' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
M A P

11	4	03
MONTH	DAY	YEAR

SCALE: 1" = 1000' DRAWN BY: J.L.G. REVISED: 00-00-00


D
TOPO

2000 PSIG DIAGRAM

BOTH RAMS ARE 2000 PSIG RATED.
CASING FLANGE IS 9" 2000 PSIG RATED.
BOPE 9" 2000 PSIG

TESTING PROCEDURE:

1. BOPE 's will be tested with a professional tester to conform to Onshore Order #2 with retest every 14 days.
2. Blind rams will be tested to rated working pressure, 2000 psig
3. Casing will be tested to 0.22 psi/ft. or 1500 psig. Not to exceed 70% of burst strength, whichever is greater.
4. All lines subject to well pressure will be pressure tested to the same pressure as blind & pipe rams.
5. All BOPE specifications and configurations will meet Onshore Order #2 requirements for 2000 psig BOPE specifications.

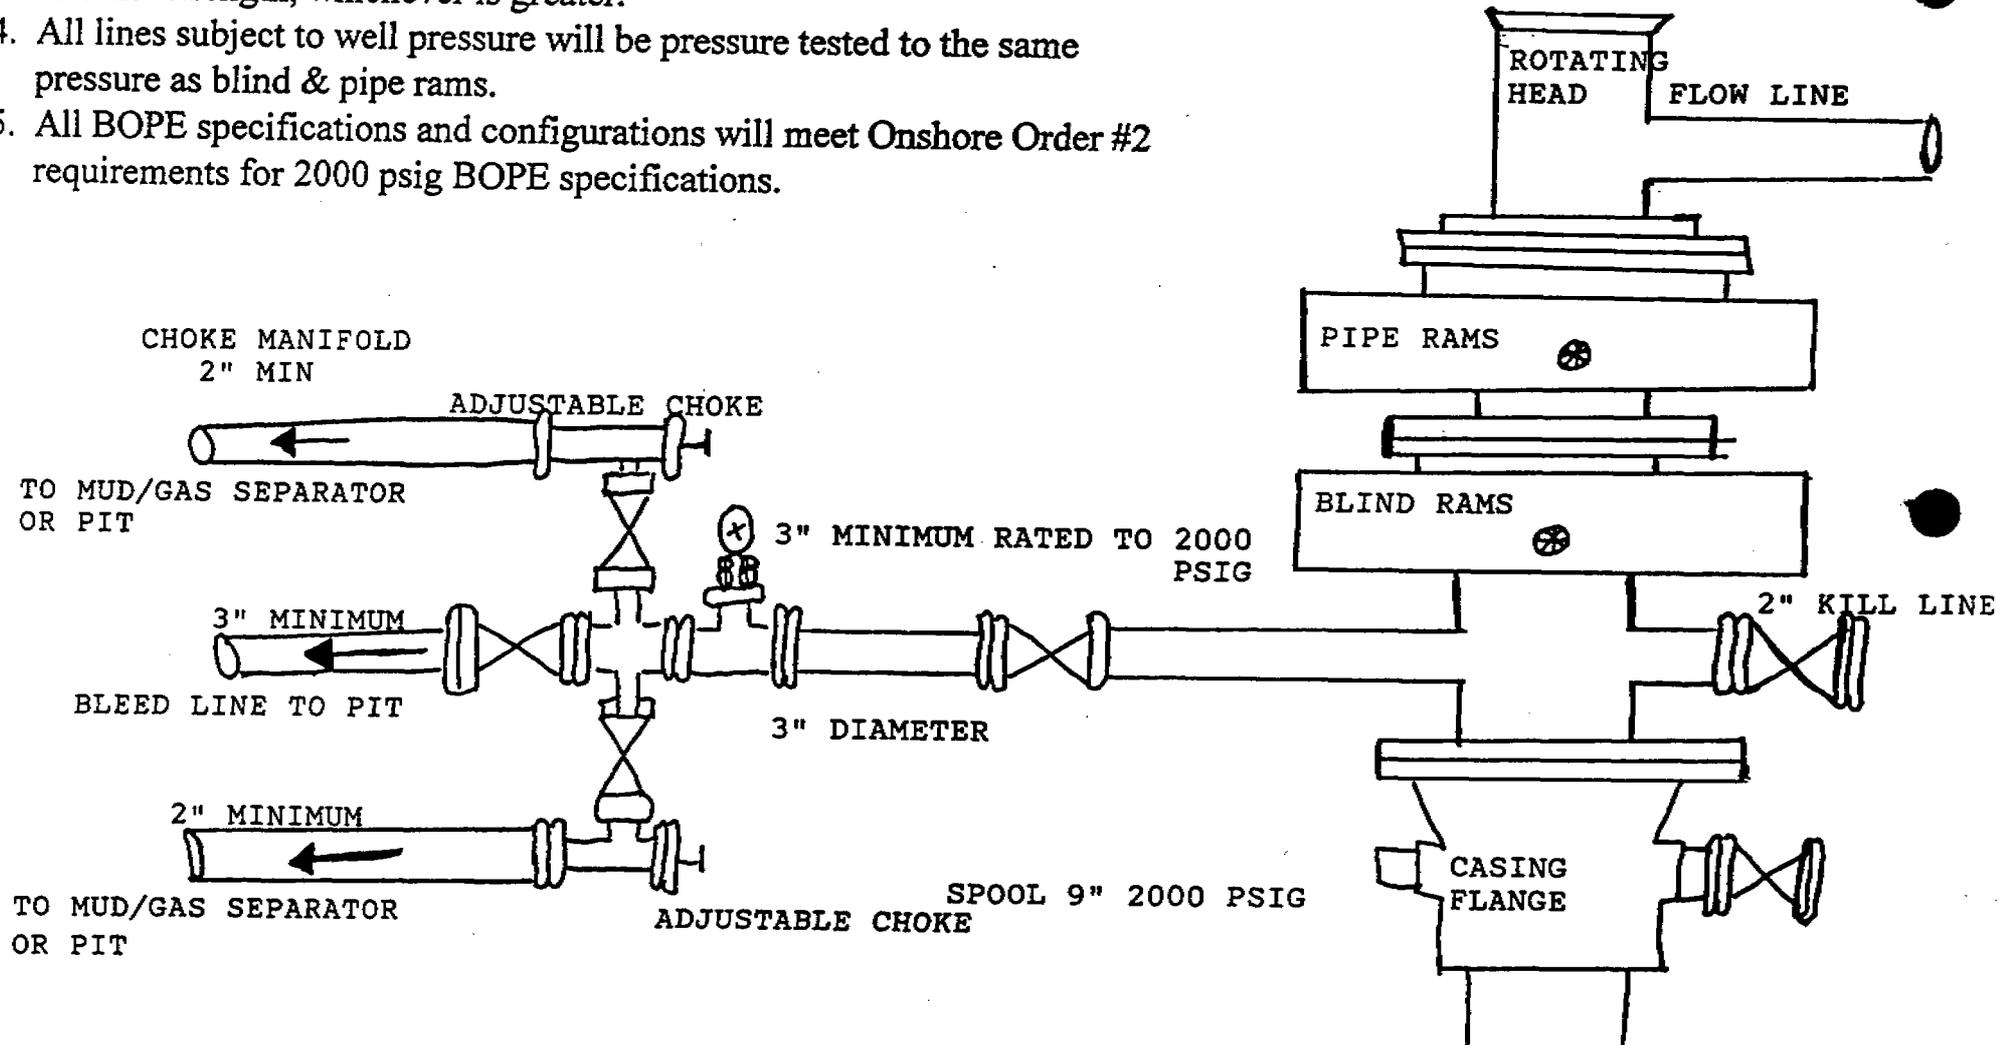

001

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: DRILL REENTER
1b. Type of Well: Oil Well Gas Well Other Single Zone Multiple Zone

2. Name of Operator
PETROGLYPH OPERATING CO., INC.

3a. Address **P.O. BOX 607,
ROOSEVELT, UT 84066**

3b. Phone No. (Include area code)
(435)722-2531

4. Location of Well (Report location clearly and in accordance with any State requirements. *)
At surface **42' FSL, 1374' FWL 4430588 Y SE/SW
563950 X 40.02497**
At proposed prod. Zone **-110.25057**

5. Lease Serial No.
14-20-H62-3515
6. If Indian, Allottee or Tribe Name
UTE INDIAN TRIBE
7. If Unit or CA Agreement, Name and No.
UTE TRIBAL
8. Lease Name and Well No.
UTE TRIBAL 20-140

9. API Well No.
43-013-32531

10. Field and Pool, or Exploratory
ANTELOPE CREEK

11. Sec., T., R., M., or Blk. and Survey or Area
**SEC. 20, T5S, R3W,
U.S.B.&M.**

14. Distance in miles and direction from nearest town or post office*
21 MILES SOUTHWEST OF MYTON, UTAH

12. County or Parish
DUCHESNE 13. State
UTAH

15. Distance from proposed*
location to nearest
property or lease line, ft. **42'**
(Also to nearest drig. Unit line, if any)

16. No. of Acres in lease
640'

17. Spacing Unit dedicated to this well

18. Distance from proposed location*
to nearest well, drilling, completed, or
applied for, on this lease, ft.

19. Proposed Depth
6000'

20. BLM/BIA Bond No. on file
BO 4556

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
6497.0 FEET UNGRADED GROUND

22. Approximate date work will start*
UPON APPROVAL

23. Estimated duration
45 DAYS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:


- 1. Well plat certified by a registered surveyor.
- 2. A Drilling Plan.
- 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- 5. Operator certification.
- 6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature *Ed Trotter* Name (Printed/Typed) **Ed Trotter** Date **3-3-2004**

Title
Agent

**Federal Approval of this
Action is Necessary**

Approved by (Signature) *Bradley G. Hill* Name (Printed/Typed) **BRADLEY G. HILL**
Title **ENVIRONMENTAL SCIENTIST III**
Office



03-08-04

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of Approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

T5S, R3W, U.S.B.&M.

PETROGLYPH OPERATING CO., INC.



Well location, UTE TRIBAL #20-140, located as shown in the SE 1/4 SW 1/4 of Section 20, T5S, R3W, U.S.B.&M., Duchesne County, Utah.

BASIS OF ELEVATION

BRASS CAP SET IN CONCRETE BY SUNRISE ENGINEERING LOCATED IN THE SE 1/4 OF SECTION 16, T5S, R3W, U.S.B.&M. SAID ELEVATION IS MARKED AS BEING 6281.9 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

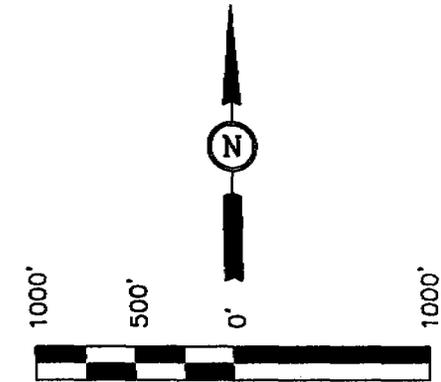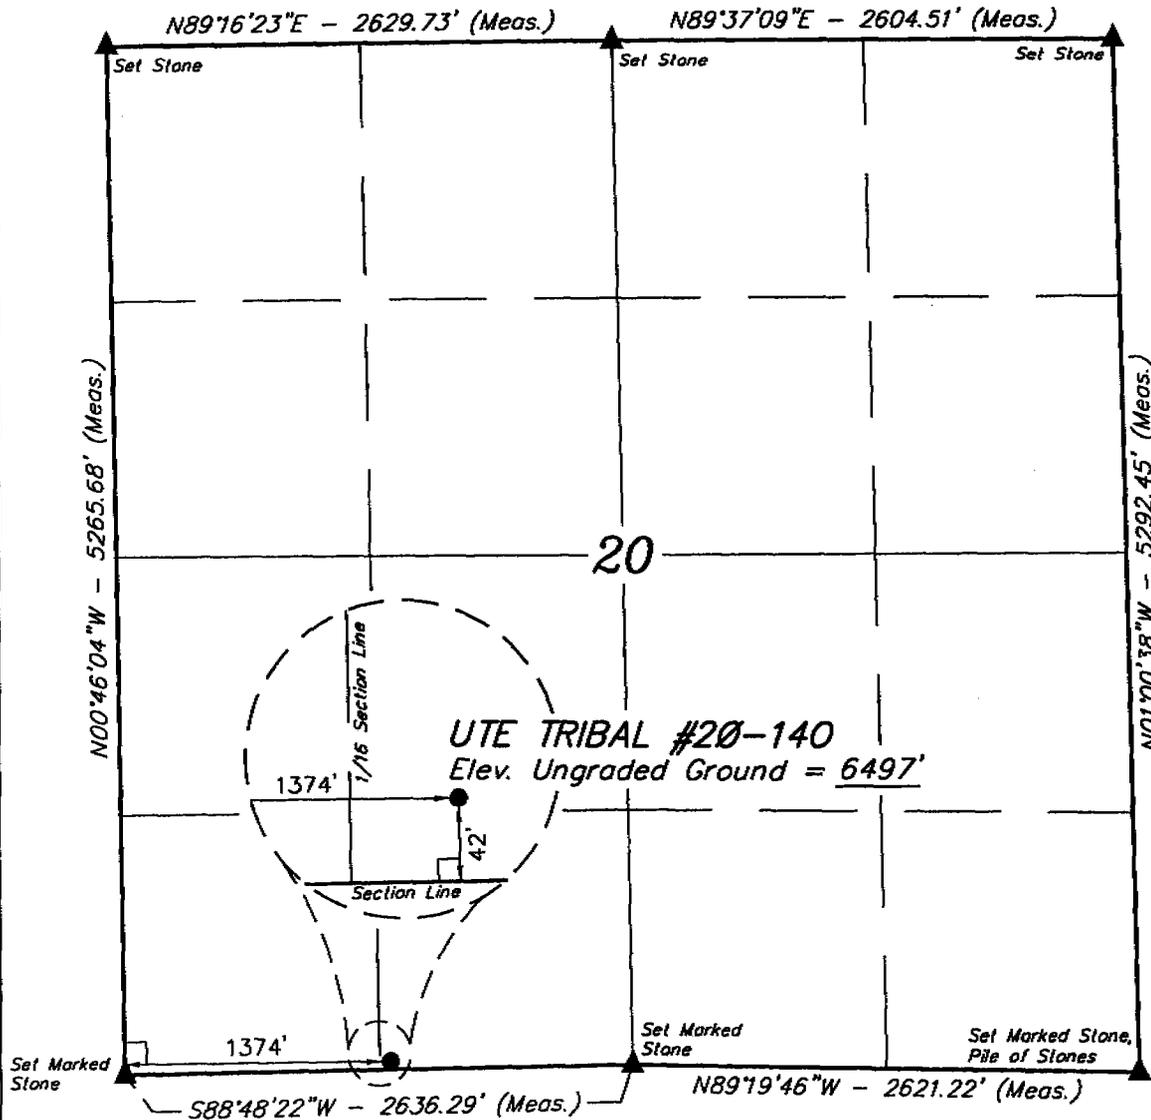

SCALE

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Robert D. Cox

REGISTERED LAND SURVEYOR
REGISTRATION NO. 161319
STATE OF UTAH

REVISED: 02-25-04 D.COX

UINTAH ENGINEERING & LAND SURVEYING
85 SOUTH 200 EAST - VERNAL, UTAH 84078
(435) 789-1017

LEGEND:

- = 90° SYMBOL
- = PROPOSED WELL HEAD.
- = SECTION CORNERS LOCATED.

(NAD 83)
LATITUDE = 40°01'29.97" (40.024992)
LONGITUDE = 110°15'04.67" (110.251297)

SCALE 1" = 1000'	DATE SURVEYED: 10-22-03	DATE DRAWN: 10-30-03
PARTY G.S. M.B. D.COX	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE PETROGLYPH OPERATING CO., INC.	

Petroglyph Operating Co., Inc.
P.O. Box 607
Roosevelt, UT 84066

March 3, 2004

Utah Division of Oil, Gas, & Mining
1594 West North Temple, Suite 1210
Box 145801
Salt Lake City, UT 84114-5801

RE: APPLICATION FOR PERMIT TO DRILL
UTE TRIBAL #20-140
SE/SW, SEC. 20, T5S, R3W, U.S.B.&M.
DUCHESNE COUNTY, UTAH
LEASE NO.: BIA 14-20-H62-3515
UTE INDIAN TRIBAL LANDS

Enclosed please find copies of the corrected Form 3160-3, surveyor's plat, 8 Point Plan, and Conditions of Approval for the above-referenced well. The previous surveyor's plat had indicated that the well was in the SW/SW and the Ute Tribal Well 20-140 is actually in the SE/SW. We would ask that you substitute these pages for the ones submitted December 23, 2003. Thank you.

Please address further communication regarding this matter (including approval) to:

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Phone: (435)789-4120
Fax: (435)789-1420

Sincerely,



Ed Trotter

Agent
Petroglyph Operating Co., Inc.

Attachments

RECEIVED
MAR 05 2004
DIV. OF OIL, GAS & MINING

007

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 01/14/2004

API NO. ASSIGNED: 43-013-32531

WELL NAME: UTE TRIBAL 20-140
OPERATOR: PETROGLYPH OPERATING CO (N3800)
CONTACT: ED TROTTER

PHONE NUMBER: 435-789-4120

PROPOSED LOCATION:
SESW 20 050S 030W
SURFACE: 0042 FSL 1374 FWL
BOTTOM: 0042 FSL 1374 FWL
DUCHESNE
ANTELOPE CREEK (60)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 2 - Indian
LEASE NUMBER: 14-20-H62-3515
SURFACE OWNER: 2 - Indian
PROPOSED FORMATION: CSLPK

LATITUDE: 40.02497
LONGITUDE: 110.25057

RECEIVED AND/OR REVIEWED:

Plat

Bond: Fed[] Ind[2] Sta[] Fee[]
(No. 4556)

Potash (Y/N)

Oil Shale 190-5 (B) or 190-3 or 190-13

Water Permit
(No. 43-10152)

RDCC Review (Y/N)
(Date:)

Fee Surf Agreement (Y/N)

LOCATION AND SITING:

___ R649-2-3.
Unit _____

___ R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells


R649-3-3. ~~Directional~~

___ Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____


___ R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: 1- Federal approval
2- Spacing 879

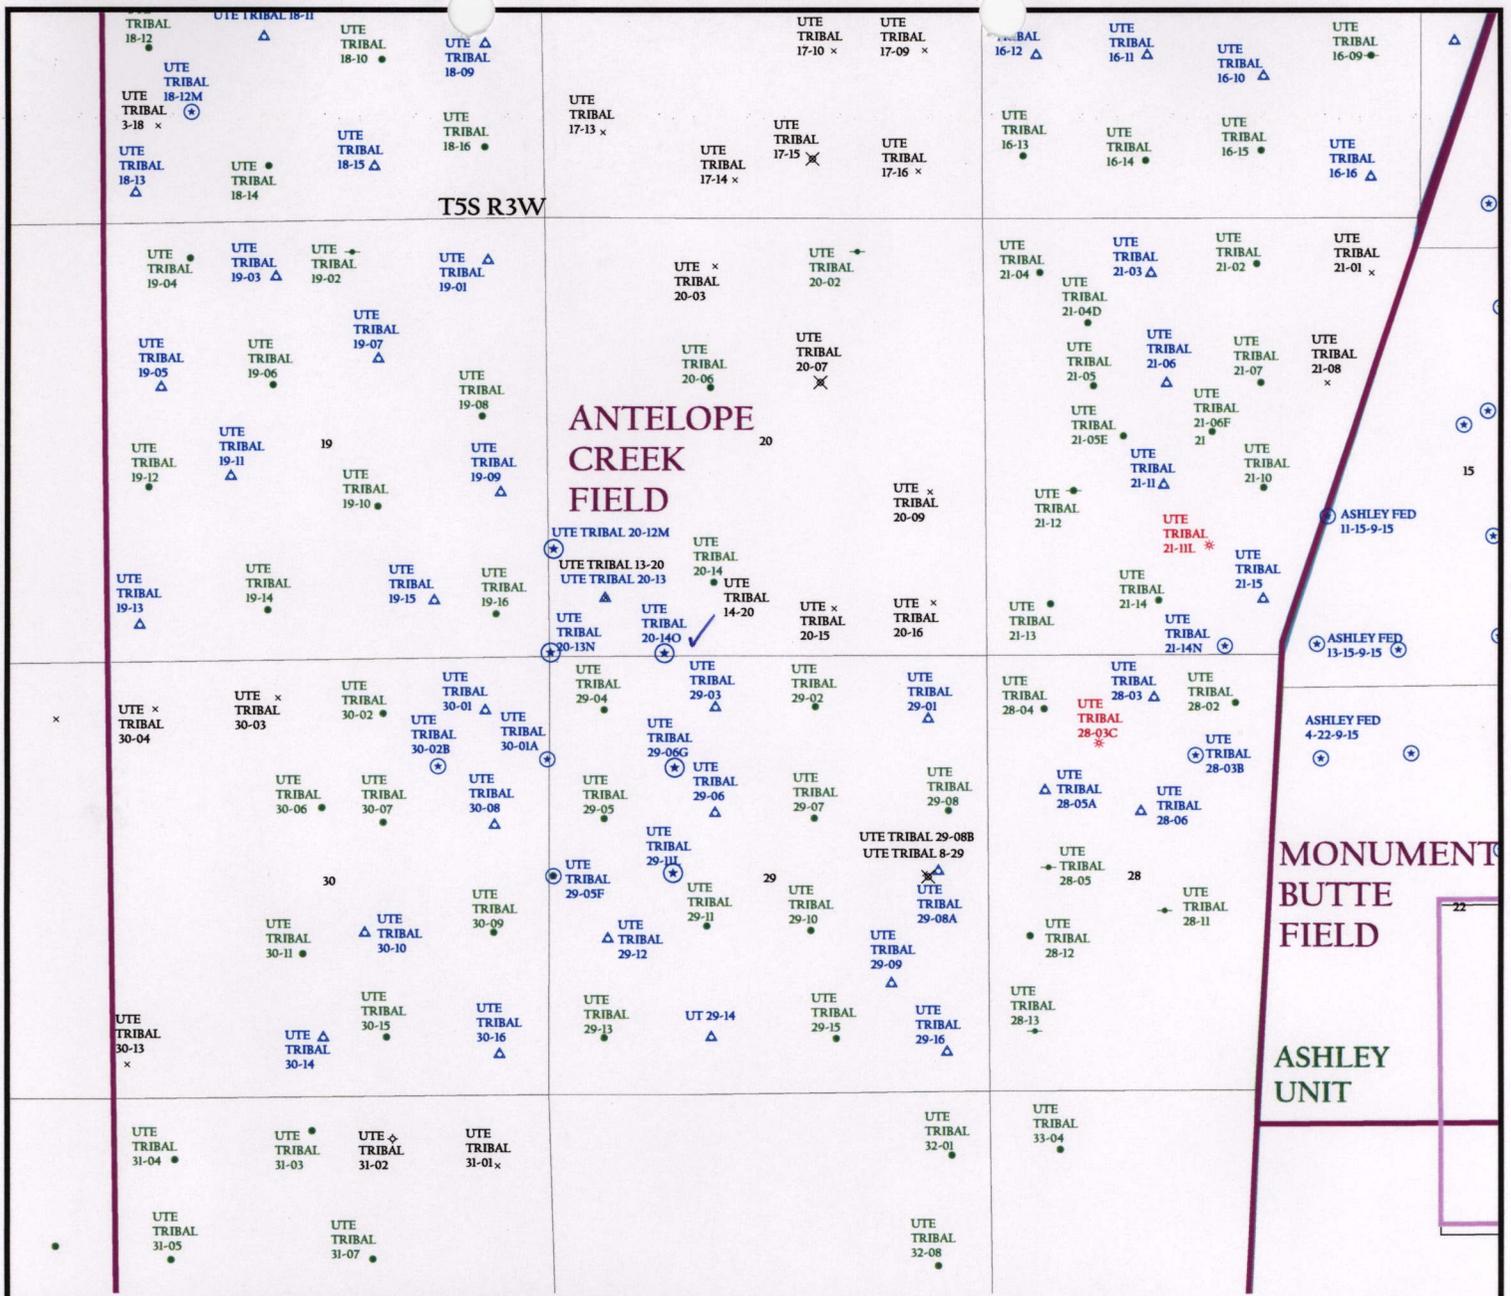

OPERATOR: PETROGLYPH OPER CO (N3800)
 SEC. 20 T.5S, R.3W
 FIELD: ANTELOPE CREEK (60)
 COUNTY: DUCHESNE
 SPACING: R649-3-3 / EXCEPTION LOCATION

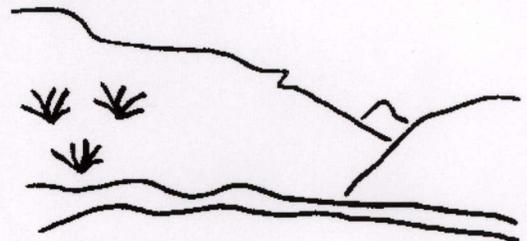

Utah Oil Gas and Mining

- Wells**
- GAS INJECTION
 - GAS STORAGE
 - LOCATION ABANDONED
 - ⊙ NEW LOCATION
 - PLUGGED & ABANDONED
 - PRODUCING GAS
 - PRODUCING OIL
 - SHUT-IN GAS
 - SHUT-IN OIL
 - × TEMP. ABANDONED
 - TEST WELL
 - △ WATER INJECTION
 - WATER SUPPLY
 - WATER DISPOSAL

- Unit Status**
- EXPLORATORY
 - GAS STORAGE
 - NF PP OIL
 - NF SECONDARY
 - PENDING
 - PI OIL
 - PP GAS
 - PP GEOTHERML
 - PP OIL
 - SECONDARY
 - TERMINATED

- Field Status**
- ABANDONED
 - ACTIVE
 - COMBINED
 - INACTIVE
 - PROPOSED
 - STORAGE
 - TERMINATED



PREPARED BY: DIANA WHITNEY
 DATE: 16-JANUARY-2004



State of Utah

Department of
Natural Resources

Division of
Oil, Gas & Mining

ROBERT L. MORGAN
Executive Director

LOWELL P. BRAXTON
Division Director

MICHAEL O. LEAVITT
Governor

OLENE S. WALKER
Lieutenant Governor

March 8, 2004

Petroglyph Operating Co., Inc.
P O Box 607
Roosevelt, UT 84066

Re: Ute Tribal 20-140 Well, 42' FSL, 1374' FWL, SE SW, Sec. 20, T. 5 South,
R. 3 West, Duchesne County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

Appropriate information has been submitted to DOGM and administrative approval of the requested exception location is hereby granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-013-32531.

Sincerely,

John R. Baza
Associate Director

pab
Enclosures

cc: Duchesne County Assessor
Bureau of Land Management, Vernal District Office

Operator: Petroglyph Operating Co., Inc.

Well Name & Number Ute Tribal 20-140

API Number: 43-013-32531

Lease: 14-20-H62-3515

Location: SE SW Sec. 20 T. 5 South R. 3 West

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

009

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: DRILL REENTER
1b. Type of Well: Oil Well Gas Well Other Single Zone Multiple Zone

2. Name of Operator
PETROGLYPH OPERATING CO., INC.

3a. Address **P.O. BOX 607,
ROOSEVELT, UT 84066**

3b. Phone No. (Include area code)
(435)722-2531

4. Location of Well (Report location clearly and in accordance with any State requirements. *)
At surface **42' FSL, 1374' FWL** **SE/SW**

At proposed prod. Zone

14. Distance in miles and direction from nearest town or post office*
21 MILES SOUTHWEST OF MYTON, UTAH

15. Distance from proposed*
location to nearest **42'**
property or lease line, ft.
(Also to nearest drig. Unit line, if any)

16. No. of Acres in lease
640'

17. Spacing Unit dedicated to this well

RECEIVED

APR 06 2004

18. Distance from proposed location*
to nearest well, drilling, completed, '
applied for, on this lease, ft.

19. Proposed Depth
6000'

20. BLM/BIA Bond No. on file

BO 4556

DIV. OF OIL, GAS & MINING

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
6497.0 FEET UNGRADED GROUND

22. Approximate date work will start*
UPON APPROVAL

23. Estimated duration
45 DAYS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature

Ed Trotter
Agent

Name (Printed/Typed)
Ed Trotter

Date

3-3-2004

Approved by (Signature)

Edwin J. Foreman
Assistant Field Manager
Mineral Resources

Name (Printed/Typed)

EDWIN J FOREMAN
Office

Date

4/1/04

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of Approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

400 GM
NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Petroglyph Operating Co.
Well Name & Number: Ute 20-140
Lease Number: 1420-H62-3515
API Number: 43-013-32531
Location: SESW Sec. 20 T.5S R. 3W
Agreement: 1420-H62-4650

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

CONDITIONS OF APPROVAL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to John Mayers of this office **prior to setting the next casing string or requesting plugging orders**. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No.

2 for equipment and testing requirements, procedures, etc., for a 2M system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

If an air compressor is on location and is being utilized to provide air for the drilling medium while drilling, the special drilling requirements in Onshore Oil and Gas Order No. 2, regarding air or gas drilling shall be adhered to.

The variances requested in section 6 of the 8 point drilling plan are granted with the following conditions:

If a mist system is being utilized then the requirement for an automatic ignitor shall be waived.

Where the location and rig layout allows, the blooie line shall be straight and extend 100' from the wellbore. This requirement will be waived only in the case where the location is too small to accommodate it.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint. Surface casing setting depths are based on ground level elevations only.

As a minimum requirement the base of the usable water, which has been identified at ± 496 , must be isolated. This can either be accomplished by setting the surface casing below this depth or extending the cement behind the production casing at least 200' above this point.

All casing strings below the conductor shall be pressure tested to 0.22 psi/ft of casing string length or 1500 psi, whichever is greater but not to exceed 70% of the minimum internal yield.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

A cement bond log (CBL) will be run from the production casing shoe to top of the cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Please submit to this office, in LAS format, an electronic copy of all logs run on this well. This submission will replace the requirement for submittal of paper logs to the BLM.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Written notification of such must be submitted to this office not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5(d) shall be submitted to the appropriate Field Office within 60 days of installation or first production, whichever occurs first. All site security

regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (1).

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergencies, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling onlease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries and tested for meter accuracy at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162. "Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, you must contact one of the following individuals:

Ed Forsman (435) 828-7874
Petroleum Engineer

Kirk Fleetwood (435) 828-7875
Petroleum Engineer

BLM FAX Machine (435) 781-4410

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spend solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids.

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

Petroglyph Operating Company, Inc. (Petroglyph) will assure the Ute Tribe that any/all contractors and subcontractors have acquired a current Tribal Business License and have updated "Access Permits" prior to construction. All Petroglyph personnel, contractors and subcontractors will have these permits in their vehicles at all times. Companies that have not complied with this COA will be in violation of the Ute Tribal Business License Ordinance, and will be subject to fines and penalties.

Petroglyph employees, representatives, and/or authorized personnel (subcontractors) shall not carry firearms on their person or in their vehicles while working on the Uintah and Ouray Indian Reservation.

Petroglyph employees and/or authorized personnel (subcontractors) in the field will have approved applicable APDs and/or ROW permits/authorizations on their person(s) during all phases of construction.

Petroglyph will notify the Ute Tribe and Bureau of Indian Affairs (BIA) in writing of any requested modification of APDs or Rights-Of Way (ROW). Petroglyph shall receive written notification of authorization or denial of the requested modification. Without authorization, Petroglyph will be subject to fines and penalties.

The Ute Tribe Energy & Minerals Department shall be notified in writing 48 hours in advance of any construction activity. The Ute Tribal office is open Monday through Thursday. A Tribal Technician is to routinely monitor construction. Petroglyph shall make arrangements with the Ute Energy & Minerals Department for all monitoring that will exceed regular working hours for Tribal Technicians. A qualified archaeologist accompanied by a Tribal Technician will monitor any trenching construction of the pipeline.

A corridor ROW, 60 feet wide and 486 feet long, shall be granted for pipeline and for the new access road. About 1200 feet of existing ROW adjacent to existing roads will also be used for the pipeline. The constructed, travel width of the access road will be limited to 18 feet. Upon authorization by the Ute Tribe Energy & Minerals Department, the ROW may be wider where sharp curves; deep cuts and fills occur; or, where intersections with other roads are required.

Culverts and diversion ditches will be placed and constructed where needed. Road base gravel will be used where sandy soils make roadways and the drilling location hazardous for access or drilling operations.

Upon completion of the pertinent APD and ROWs, Petroglyph will notify the Ute Tribe Energy & Minerals Department for a Tribal Technician to verify the Affidavit of Completion.

Production waters, oil, and other byproducts shall not be placed on access roads or the well pad.

All vehicular traffic, personnel movement, construction and restoration operations will be confined to the areas examined and approved and to the existing roadways and/or evaluated access routes.

Petroglyph will implement "Safety and Emergency Plan" and ensure plan compliance.

Petroglyph shall stop construction activities and notify personnel from the Ute Tribe Energy & Minerals Department and BIA if cultural remains including paleontology resources (vertebrate fossils) are exposed

or identified during construction. The Ute Tribe Department of Cultural Rights and Protection and the BIA will provide mitigation measures prior to allowing construction.

Petroglyph employees and/or authorized personnel (subcontractors) will not be allowed to collect artifacts and paleontology fossils. No significant cultural resources shall be disturbed.

Petroglyph will control noxious weeds on the well site and ROWs. Petroglyph will be responsible for noxious weed control if weeds spread from the project area onto adjoining land.

Reserve pits will be lined with an impervious synthetic liner. A fence will be constructed around the reserve pit until it is backfilled. Prior to backfilling the reserve pit, all fluids will be pumped from the pit into trucks and hauled, to approved disposal sites. When the reserve pits are backfilled, the surplus oil and mud, etc., will be buried a minimum of 3 feet below the surface of the soil.

A closed system will be used during production. This means that production fluids will be contained in leak-proof tanks. All production fluids will be disposed of at approved disposal sites.

Surface pipelines will be constructed to lay on the soil surface. The pipeline portion of the ROW will not be bladed or cleared of vegetation without authorization of the BIA. Surface pipelines shall be welded in place at well sites or on access roads. They shall be pulled into place and assembled with suitable equipment. Vehicles shall not use pipeline ROWs as access roads unless specifically authorized.

Buried pipelines shall be buried a minimum of 3 feet below the soil surface. After construction is completed the disturbed area shall be contoured to blend into the natural landscape and be reseeded between September 15 and November 1 of the year following construction with perennial vegetation seed mixture provided by the BIA or Ute Tribe.

Before the site is abandoned, Petroglyph will be required to restore the well site and ROWs to near their original state. The disturbed areas will be reseeded with desirable perennial vegetation.

Soil erosion will be mitigated, by reseeded all disturbed areas.

DIVISION OF OIL, GAS AND MINING**SPUDDING INFORMATION**Name of Company: PETROGLYPH OPERATING COMPANYWell Name: UTE TRIBAL 20-140Api No: 43-013-32531 Lease Type: INDIANSection 20 Township 05S Range 03W County DUCHESNEDrilling Contractor CRAIG'S ROUSTABOUT SERV RIG # RATHOLE**SPUDDED:**Date 06/24/04Time 10:30 AMHow DRY**Drilling will commence:** _____Reported by MATT CORSERTelephone # 1-435-722-2531Date 06/25/2004 Signed CHD

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

011


<p>SUNDRY NOTICES AND REPORTS ON WELLS</p> <p><small>Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.</small></p>		<p>5. LEASE DESIGNATION AND SERIAL NUMBER: BIA 14-20-H62-3515</p>
<p>1. TYPE OF WELL OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____</p>		<p>6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE INDIAN TRIBE</p>
<p>2. NAME OF OPERATOR: PETROGLYPH OPERATING CO. INC.</p>		<p>7. UNIT or CA AGREEMENT NAME: UTE TRIBAL</p>
<p>3. ADDRESS OF OPERATOR: P.O. BOX 607 CITY ROOSEVELT STATE UT ZIP 84066</p>		<p>8. WELL NAME and NUMBER: UTE TRIBAL 20-140</p>
<p>4. LOCATION OF WELL FOOTAGES AT SURFACE: 42' FSL, 1374' FWL</p>		<p>9. API NUMBER: 4301332531</p>
<p>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESW 20 5S 3W U</p>		<p>10. FIELD AND POOL, OR WILDCAT: ANTELOPE CREEK</p>
		<p>COUNTY: DUCHESNE</p>
		<p>STATE: UTAH</p>

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input checked="" type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Petroglyph Operating Co., Inc. requests that the name of the subject well be changed to UTE TRIBAL 20-14N.

NAME (PLEASE PRINT) <u>Ed Trotter</u>	TITLE <u>Agent</u>
SIGNATURE 	DATE <u>6/2/2004</u>

(This space for State use only)

RECEIVED
JUN 25 2004
DIV. OF OIL, GAS & MINING

012

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: Petroglyph Operating Co. Operator Account Number: N3800
Address: P.O. Box 607
Roosevelt, UT. 84066 Phone Number: 435-722-2531

Well 1

API Number	Well Name	QQ	Sec	Twp	Rng	County
43-013-30531	UTe Tribal 20-140	SE	20	55	3W	Duchesne
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date	
B	99999	09397	6-24-2004		6/30/04	
Comments: CSLPK						

Well 2

API Number	Well Name	QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date	
Comments:						

Well 3

API Number	Well Name	QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date	
Comments:						

RECEIVED

JUN 25 2004

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Callie Duncan DIV. OF OIL, GAS & MINING
Name (Please Print)
Callie Duncan
Signature
Production Asst. 6-25-04
Title Date

014

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

AMENDED REPORT FORM 8
(highlight changes)

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. TYPE OF WELL: OIL WELL GAS WELL DRY OTHER _____

b. TYPE OF WORK: NEW WELL HORIZ. LATS. DEEP-EN RE-ENTRY DIFF. RESVR. OTHER _____

2. NAME OF OPERATOR: Petroglyph Operating Co.

3. ADDRESS OF OPERATOR: P.O. Box 607 CITY Roosevelt STATE UT. ZIP 84006 PHONE NUMBER: 722-

4. LOCATION OF WELL (FOOTAGES)
AT SURFACE: 42 FSL 1374 FWL
AT TOP PRODUCING INTERVAL REPORTED BELOW: 42 FSL 1374 FWL
AT TOTAL DEPTH: 42 FSL 1374 FWL

5. LEASE DESIGNATION AND SERIAL NUMBER: 14-20-H62-3515
6. IF INDIAN, ALLOTTEE OR TRIBE NAME: Ute Indian Tribe
7. UNIT OF CO. AGREEMENT NAME: Ute Tribal 20-14N
8. WELL NAME AND NUMBER: Ute Tribal 20-14N
9. API NUMBER: 43-013-32531
10. FIELD AND POOL, OR WILDCAT: Antelope Creek
11. QUAD/RT, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESW Sec 20 T55 R3W Mer UBM
12. COUNTY: Duchesne 13. STATE: UTAH

14. DATE SPUNDED: 6-24-04 15. DATE T.D. REACHED: 7-18-04 16. DATE COMPLETED: 7-30-04 ABANDONED READY TO PRODUCE

17. ELEVATIONS (DF, RKB, RT, GL): 10 KB
18. TOTAL DEPTH: MD 6040 TVD _____ 19. PLUG BACK T.D.: MD 5938 TVD _____ 20. IF MULTIPLE COMPLETIONS, HOW MANY? * _____ 21. DEPTH BRIDGE PLUG SET: MD _____ TVD _____

22. TYPE ELECTRIC AND OTHER MECHANICAL LOGS RUN (Submit copy of each): Compensated density, compensated neutron, VCB, Dual Ind.
23. WAS WELL CORED? NO YES (Submit analysis)
WAS DST RUN? NO YES (Submit report)
DIRECTIONAL SURVEY? NO YES (Submit copy)

24. CASING AND LINER RECORD (Report all strings and in well)

HOLE SIZE	SIZE/GRADE	WEIGHT (W/L)	TOP (MD)	BOTTOM (MD)	STAGE CEMENTER DEPTH	CEMENT TYPE & NO. OF SACKS	SLURRY VOLUME (BBL)	CEMENT TOP **	AMOUNT PULLED
12.250	8.625 J55	24.0	0	545		300	63	0	
7.875	5.500 J55	15.5	0	6003		575	241	1340	

25. TUBING RECORD

SIZE	DEPTH SET (MD)	PACKER SET (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
2.875	5934							

26. PRODUCING INTERVALS

FORMATION NAME	TOP (MD)	BOTTOM (MD)	TOP (TVD)	BOTTOM (TVD)	INTERVAL (TopBot - MD)	SIZE	NO. HOLES	PERFORATION STATUS
(A) Green River	4024	5914			4024 to 4032	.450	32	Open <input checked="" type="checkbox"/> Squeezed <input type="checkbox"/>
(B) Green River					4200 to 4214	.450	56	Open <input checked="" type="checkbox"/> Squeezed <input type="checkbox"/>
(C) Green River					4433 to 4442	.450	36	Open <input checked="" type="checkbox"/> Squeezed <input type="checkbox"/>
(D) Green River					4673 to 4677	.450	64	Open <input checked="" type="checkbox"/> Squeezed <input type="checkbox"/>

28. ACID, FRACTURE, TREATMENT, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL	AMOUNT AND TYPE OF MATERIAL
5904	5944 Sand Frac W# 32000
4834	4943 Sand Frac W# 21000
4744	4677 Sand Frac W# 32000
4033	4042 Sand Frac W# 35500

29. ENCLOSED ATTACHMENTS: 4024 4032 Sand Frac W# 33000
 ELECTRICAL/MECHANICAL LOGS GEOLOGIC REPORT DST REPORT DIRECTIONAL SURVEY
 SUNDRY NOTICE FOR PLUGGING AND CEMENT VERIFICATION CORE ANALYSIS OTHER: _____

RECEIVED
AUG 8 2004
DIV. OF OIL, GAS & MINING

31. INITIAL PRODUCTION

INTERVAL A (As shown in Item #26)

DATE FIRST PRODUCED: 8-1-04		TEST DATE: 7-31-04		HOURS TESTED: 24		TEST PRODUCTION RATES: (l)	OIL - BBL: 29	GAS - MCF: 14	WATER - BBL: 50	PROD. METHOD: -
CHOKE SIZE:	TBG. PRESS. 75	CSG. PRESS. 75.0	API GRAVITY 33.0	BTU - GAS .65	GAS/OIL RATIO 483	24 HR PRODUCTION RATES: (l)	OIL - BBL: 29	GAS - MCF: 14	WATER - BBL: 50	INTERVAL STATUS: POW

INTERVAL B (As shown in Item #26)

DATE FIRST PRODUCED:		TEST DATE:		HOURS TESTED:		TEST PRODUCTION RATES: (l)	OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: (l)	OIL - BBL:	GAS - MCF:	WATER - BBL:	INTERVAL STATUS:

INTERVAL C (As shown in Item #26)

DATE FIRST PRODUCED:		TEST DATE:		HOURS TESTED:		TEST PRODUCTION RATES: (l)	OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: (l)	OIL - BBL:	GAS - MCF:	WATER - BBL:	INTERVAL STATUS:

INTERVAL D (As shown in Item #26)

DATE FIRST PRODUCED:		TEST DATE:		HOURS TESTED:		TEST PRODUCTION RATES: (l)	OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: (l)	OIL - BBL:	GAS - MCF:	WATER - BBL:	INTERVAL STATUS:

32. DISPOSITION OF GAS (Sold, Used for Fuel, Vented, Etc.)

Used on lease.

33. SUMMARY OF POROUS ZONES (Include Aquifers):

Show all important zones of porosity and contents thereof. Core intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

34. FORMATION (Log) MARKERS:

Formation	Top (MD)	Bottom (MD)	Descriptions, Contents, etc.	Name	Top (Measured Depth)
Green River	4024	4032	B1		
Green River	4200	4214	B6		
Green River	4433	4442	B10		
Green River	4673	4677	C4		
Green River	4696	4704	C5		
Green River	4744	4748	C5.2		
Green River	4834	4843	C6		
Green River	5904	5914	E7		

35. ADDITIONAL REMARKS (Include plugging procedure)

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records.

NAME (PLEASE PRINT) Matt Corser TITLE Petroleum Engineer
 SIGNATURE Matt Corser DATE 8-13-04

This report must be submitted within 30 days of

- completing or plugging a new well
- drilling horizontal laterals from an existing well bore
- recompleting to a different producing formation
- reentering a previously plugged and abandoned well
- significantly deepening an existing well bore below the previous bottom-hole depth
- drilling hydrocarbon exploratory holes, such as core samples and stratigraphic tests

* ITEM 20: Show the number of completions if production is measured separately from two or more formations.

** ITEM 24: Cement Top - Show how reported top(s) of cement were determined (circulated (CIR), calculated (CAL), cement bond log (CBL), temperature survey (TS)).

Send to: Utah Division of Oil, Gas and Mining
 1594 West North Temple, Suite 1210
 Box 145801
 Salt Lake City, Utah 84114-5801
 Phone: 801-538-5340
 Fax: 801-359-3940

013

PETROGLYPH**Petroglyph Energy, Inc.**

555 S. COLE RD.
BOISE, ID 83709
(208) 377-6000

**Drilling Chronological
Regulatory**

Well Name: UTE TRIBAL 20-14N 43-013-32531							
Field Name	ANTELOPE CREEK	S/T/R	20/5S/3W	County, State	DUCHESNE, UT		
Operator	GLYPH OPERATING COM	Location Desc		District	UTAH		
Project AFE:	42153	AFEs Associated:	/ / /				
Daily Summary							
Activity Date :	5/18/2004	Days From Spud :	0	Current Depth :	0 Ft	24 Hr. Footage Made :	0 Ft
Rig Company :			Rig Name :				
Formation :			Weather :				
Operations							
Start	Hrs	Code	Remarks	Start Depth	End Depth	Run	
	0.00					NIH	
Total:	0.00						
Daily Summary							
Activity Date :	5/24/2004	Days From Spud :	0	Current Depth :	0 Ft	24 Hr. Footage Made :	0 Ft
Rig Company :			Rig Name :				
Formation :			Weather :				
Daily Summary							
Activity Date :	5/25/2004	Days From Spud :	0	Current Depth :	0 Ft	24 Hr. Footage Made :	0 Ft
Rig Company :			Rig Name :				
Formation :			Weather :				
Daily Summary							
Activity Date :	6/1/2004	Days From Spud :	0	Current Depth :	0 Ft	24 Hr. Footage Made :	0 Ft
Rig Company :			Rig Name :				
Formation :			Weather :				
Daily Summary							
Activity Date :	6/18/2004	Days From Spud :	0	Current Depth :	3856 Ft	24 Hr. Footage Made :	0 Ft
Rig Company :			Rig Name :				
Formation :			Weather :				
Daily Summary							
Activity Date :	6/26/2004	Days From Spud :	0	Current Depth :	3856 Ft	24 Hr. Footage Made :	0 Ft
Rig Company :			Rig Name :				
Formation :			Weather :				
Daily Summary							
Activity Date :	6/30/2004	Days From Spud :	0	Current Depth :	3856 Ft	24 Hr. Footage Made :	0 Ft
Rig Company :			Rig Name :				
Formation :			Weather :				
Daily Summary							
Activity Date :	7/9/2004	Days From Spud :	15	Current Depth :	3856 Ft	24 Hr. Footage Made :	0 Ft
Rig Company :			Rig Name :				
Formation :			Weather :				

RECEIVED

AUG 27 2004

DIV. OF OIL, GAS & MINING

8/26/2004

Well Name: UTE TRIBAL 20-14N

Field Name	ANTELOPE CREEK	S/T/R	20/5S/3W	County/State	DUCHESNE, UT
Operator	GLYPH OPERATING COM	Location Desc		District	UTAH

Daily Summary

Activity Date :	7/13/2004	Days From Spud :	19	Current Depth :	0 Ft	24 Hr. Footage Made :	0 Ft
Rig Company :		Rig Name :		Formation :		Weather :	

Operations

Start	Hrs	Code	Remarks	Start Depth	End Depth	Run
22:00	8.00	01	Rig up & tear down	0	0	NIH
6:00	8.00	01	Finish rigging down move rig up	0	0	NIH
14:00	2.00	08	Work on table	0	0	NIH
16:00	1.50	14	Nipple up BOP	0	0	NIH
17:30	3.50	15	Test BOP	0	0	NIH
21:00	1.50	22	Pick BHA	0	0	NIH
22:30	1.50	35	Drill cement tagged at 445	0	0	NIH
Total:	26.00					

Daily Summary

Activity Date :	7/14/2004	Days From Spud :	20	Current Depth :	2335 Ft	24 Hr. Footage Made :	1778 Ft
Rig Company :		Rig Name :		Formation :		Weather :	

Operations

Start	Hrs	Code	Remarks	Start Depth	End Depth	Run
22:00	0.75	12	Drill cement and shoe	0	0	NIH
22:45	3.50	02	Drill from 557 to 817	557	817	NIH
2:15	0.50	10	Dev. Survey and rig service	817	817	NIH
2:45	3.25	02	Drill from 817 to 1070	817	1070	NIH
6:00	2.25	02	Drill from 1070 to 1324	1070	1324	NIH
8:15	0.25	07	Lubricate rig	1324	1324	NIH
8:30	0.25	10	Dev. Survey	1324	1324	NIH
8:45	5.25	02	Drill from 1324 to 1703	1324	1703	NIH
14:00	3.00	02	Drill from 1703 to 1988	1703	1988	NIH
17:00	0.50	10	Dev. Survey	1988	1988	NIH
17:30	4.50	02	Drill from 1988 to 2335	1988	2335	NIH
Total:	24.00					

Daily Summary

Activity Date :	7/15/2004	Days From Spud :	21	Current Depth :	3856 Ft	24 Hr. Footage Made :	1521 Ft
Rig Company :		Rig Name :		Formation :		Weather :	

Operations

Start	Hrs	Code	Remarks	Start Depth	End Depth	Run
22:00	1.25	02	Drill from 2335 to 2493	2335	2493	NIH
23:15	0.50	10	Dev. Survey and service rig & pump	2493	2493	NIH
23:45	6.25	02	Drill from 2493 to 3001	2493	3001	NIH
6:00	0.25	07	Lubricate rig	3001	3001	NIH
6:15	0.25	10	Dev. Survey	3001	3001	NIH
6:30	7.50	02	Drill from 3001 to 3445	3001	3445	NIH
14:00	1.00	02	Drill from 3445 to 3540	3445	3540	NIH
15:00	0.50	10	Dev. Survey	3540	3540	NIH
15:30	6.50	02	Drill from 3540 to 3856	3540	3856	NIH
Total:	24.00					

Well Name: UTE TRIBAL 20-14N

Field Name	ANTELOPE CREEK	S/T/R	20/5S/3W	County, State	DUCHESNE, UT
Operator	GLYPH OPERATING COM	Location Desc		District	UTAH

Daily Summary

Activity Date :	7/16/2004	Days From Spud :	22	Current Depth :	4520 F	24 Hr. Footage Made :	664 F
Rig Company :		Rig Name :		Formation :		Weather :	

Operations

Start	Hrs	Code	Remarks	Start Depth	End Depth	Run
22:00	3.50	02	Drill from 3856 to 4045	3856	4045	NIH
1:30	0.50	10	Dev. Survey and service rig & pump	4045	4045	NIH
2:00	4.00	02	Drill from 4045 to 4203	4045	4203	NIH
6:00	1.00	05	Cond. Mud & circ. Hole	4203	4203	NIH
7:00	2.50	06	Trips out for bit	4203	4203	NIH
9:30	0.75	21	Unload casing	4203	4203	NIH
10:15	1.00	08	Slip drilling line ser. Rig	4203	4203	NIH
11:15	2.75	06	TIH	4203	4203	NIH
14:00	0.50	06	Finished TIH	4203	4203	NIH
14:30	0.50	21	Load hole and ream 40 feet to bottom	4203	4203	NIH
15:00	7.00	02	Drill 4203 to 4520	4203	4520	NIH
Total:	24.00					

Daily Summary

Activity Date :	7/17/2004	Days From Spud :	23	Current Depth :	5627 F	24 Hr. Footage Made :	1107 F
Rig Company :		Rig Name :		Formation :		Weather :	

Operations

Start	Hrs	Code	Remarks	Start Depth	End Depth	Run
22:00	2.75	02	Drill from 4520 to 4679	4520	4679	NIH
0:45	0.50	07	Lubricate rig	4679	4679	NIH
1:15	4.75	02	Drill from 4679 to 4868	4679	4868	NIH
6:00	4.25	02	Drill from 4868 to 5089	4868	5089	NIH
10:15	0.50	07	Lubricate rig	5089	5089	NIH
10:45	3.25	02	Drill from 5089 to 5247	5089	5247	NIH
14:00	4.00	02	Drill from 5247 to 5469	5247	5469	NIH
18:00	1.00	10	Dev. Survey	5469	5469	NIH
19:00	3.00	02	Drill from 5469 to 5627.71	5469	5627	NIH
Total:	24.00					

Daily Summary

Activity Date :	7/18/2004	Days From Spud :	24	Current Depth :	6040 F	24 Hr. Footage Made :	413 F
Rig Company :		Rig Name :		Formation :		Weather :	

Operations

Start	Hrs	Code	Remarks	Start Depth	End Depth	Run
22:00	8.00	02	Drill from 5627 to 5945	5627	5945	NIH
6:00	1.25	02	Drill from 5945 to 6040	5945	6040	NIH
7:15	0.25	05	Cond mud & circ clean hole	6040	6040	NIH
7:30	6.50	05	Pump sweep cir. Bottom up	6040	6040	NIH
14:00	6.00	11	Rig up loggers and log well loggers TD 6040	6040	6040	NIH
20:00	0.50	21	Press test 5.50 pipe rams	6040	6040	NIH
20:30	1.50	12	Rig up csg crew and run 5.5 csg	6040	6040	NIH
Total:	24.00					

Well Name: UTE TRIBAL 20-14N

Field Name	ANTELOPE CREEK	S/T/R	20/5S/3W	County, State	DUCHESNE, UT
Operator	GLYPH OPERATING COM	Location Desc		District	UTAH

Daily Summary

Activity Date :	7/19/2004	Days From Spud :	25	Current Depth :	3856 F	24 Hr. Footage Made :	0 Ft
Rig Company :		Rig Name :		Formation :		Weather :	

Formation

Formation Name	Current Well Top	Subsea Datum	Ref Well Top	Elec Top	Comments

Casing

Date In	Setting Depth	Jts Run	Type	Size	Weight	Grade	MINID	Hole Diam	TD
6/25/2004	544.57	12	3. Surface	8.625	24	J-55	0	12.25	0
Stage: 0, Lead, 0, 300, premium cement, Class G, 1.18, 15.6									
7/19/2004	6002.56	137	5. Production	5.5	15.5	J-55	0	7.875	0
Stage: 1, Lead, 0, 195, 16% gel-10# sk gilsonite-3% salt 1/4# sk flocele- 3rd sk GR-3, Class G, 3.82, 23									
Stage: 1, Tail, 0, 280, 10% gypsum- 1/4# sk flocele, Class G, 1.6, 14.2									
Stage: 1, Tail, 0, 100, 10% gypsum 1/4# sk flocele .3% fluid loss, Class G, 1.6, 14.2									