

# FILE NOTATIONS

Entered in NID File

\_\_\_\_\_ ✓

Entered On SR Sheet

\_\_\_\_\_ ✓

Location Map Pinned

\_\_\_\_\_ ✓

Card Indexed

\_\_\_\_\_ ✓

IWR for State or Fee Land

\_\_\_\_\_

Checked by Chief

\_\_\_\_\_ ✓

Copy NID to Field Office

\_\_\_\_\_ ✓

Approval Letter

\_\_\_\_\_ ✓

Disapproval Letter

\_\_\_\_\_

## COMPLETION DATA:

Date Well Completed

9-19-58

Location Inspected

\_\_\_\_\_

OW

WW

TA

Bond released

State of Fee Land

\_\_\_\_\_

GW

OS

PA

X

## LOGS FILED

Driller's Log

12-9-58

Electric Logs (No.)

3

I

I

EI

✓

GR

GRN

✓

Micro

✓

Lat


Mi-L

Sonic

Others

\_\_\_\_\_

- |  |                                     |
|--|-------------------------------------|
| Scout Report sent out                              | <input checked="" type="checkbox"/> |
| Noted in the N D File                              | <input checked="" type="checkbox"/> |
| Location map pinned                                | <input checked="" type="checkbox"/> |
| Approval or Disapproval Letter                     | <input checked="" type="checkbox"/> |
| Date Completed, P. & A, or<br>operations suspended | <hr/>                               |
| Pin changed on location map                        | <input type="checkbox"/>            |
| Affidavit and Record of A & P                      | <input type="checkbox"/>            |
| Water Shut-Off Test                                | <input type="checkbox"/>            |
| Gas-Oil Ratio Test                                 | <input type="checkbox"/>            |
| Well Log Filed                                     | <input type="checkbox"/>            |



(SUBMIT IN TRIPPLICATE)

Indian Agency Navajo

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Allottee Tribal Lands

Lease No. 14-20-603-247

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO REDRILL OR REPAIR WELL		SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

August 14, 1959

North Desert Creek

Well No. 44-14 is located 402.1 ft. from N line and 4652 ft. from W line of sec. 14

SE 14 (1/4 Sec. and Sec. No.)      42E (Twp.)      23E (Range)      RLGN (Meridian)  
Hatherford (Field)      San Juan (County or Subdivision)      Utah (State or Territory)

The elevation of the derrick floor above sea level is 4576 ft. (Approx. ground)

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Proposed Work:

1. Drill 12 1/4" hole to 1300'±.
2. Cement 8 5/8" casing at 1300'± with 700 sacks treated cement.
3. Drill 7 7/8" hole to 5410'± (Paradox shale).
4. Wire line core 4 3/4" hole to 5400'±.
5. Drill 4 3/4" hole to 5570'± (Paradox)
6. Cement 5 1/2" casing at 5408'± with 200 sacks regular cement.
7. Clean out with 4 3/4" bit and run to bottom.
8. Run tubing with formation pecker as directed.
9. Acidize formation with 500 gal. mud acid, 2000 gal. regular and 4000 gal. retarded acid.
10. Swab well into production and establish rate.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Shell Oil Company

Address 705 West Municipal Drive  
Farmington, New Mexico



Original signed by  
B. W. SHEPARD

By B. W. Shepard  
Title Exploitation Engineer

R. 23 E. SLBM

T. 41 S.

Sec. 14

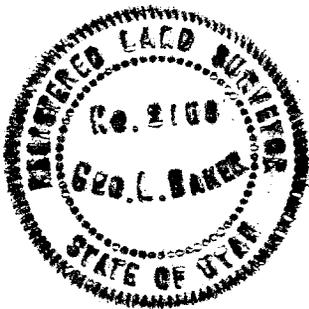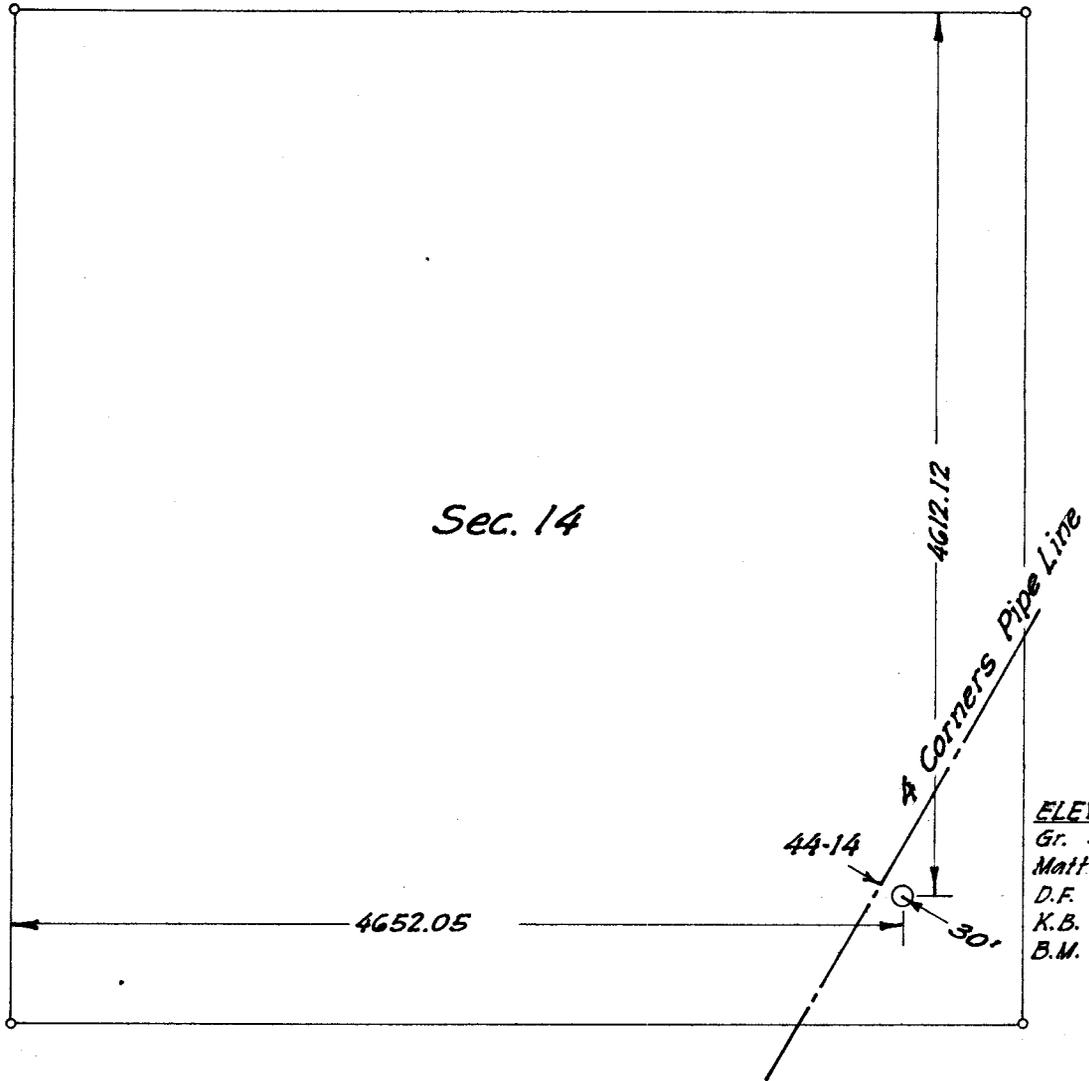

This is to certify that the above plat was plotted from field notes of a survey made under my supervision, and that the same is true and correct to the best of my knowledge and belief.

*Geo. L. Baker*  
Registered Land Surveyor  
Certificate No. 2158

DRAWN BY *R.J.C.*  
CHECKED BY  
DATE

SHELL OIL COMPANY

SCALE 1"=1000'

Z-

LOCATION OF NORTH DESERT CREEK 44-14  
San Juan County, Utah, Tr. 78, Sec. 14, T. 41 S., R. 23 E., SLBM

August 15, 1958

Shell Oil Company  
705 West Municipal Drive  
Farmington, New Mexico

Attention: B. W. Shepard, Exploitation Engineer

Gentlemen:

This is to acknowledge receipt of your notice of intention to drill Well No. Rutherford (North Desert Creek) 44 - 14, which is to be located 4612.1 feet from the north line and 4652 feet from the west line of Section 14, Township 41 South, Range 23 East, SLM, San Juan County, Utah.

Please be advised that insofar as this office is concerned, approval to drill said well is hereby granted.

This approval terminates within 90 days if the above mentioned well is not spudded in within said period.


Yours very truly,

OIL & GAS CONSERVATION COMMISSION

CLEON B. FEIGHT  
SECRETARY

CBF:co

ccPhil McGrath  
USGS, Farmington,  
New Mexico



(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Indian Agency Natajo  
Allottee Tribal Lands  
Lease No. 14-20-603-247

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO REDRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	<b>X</b>
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

August 25, 1958

**North Desert Creek**

Well No. 14-14 is located 4612.1 ft. from  $\begin{Bmatrix} N \\ S \end{Bmatrix}$  line and 4652 ft. from  $\begin{Bmatrix} E \\ W \end{Bmatrix}$  line of sec. 14

SE SE 14 (1/4 Sec. and Sec. No.)      118 (Twp.)      23E (Range)      S15W (Meridian)  
Ratherford (Field)      San Juan (County or Subdivision)      Utah (State or Territory)

The elevation of the derrick floor above sea level is 4578 ft. (approx. ground)

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

- Spudded 1:00 A.M. 8-21-58
- 8-20-58 Ran and cemented (60') 13-3/8", 42# conductor pipe at 70' with 60 sacks cement treated with 2% calcium chloride.
  - 8-23-58 Ran and cemented (1265') 8-5/8", 28#, J-55 casing at 1275' with 250 sacks 1:1 to Pozmix followed by 200 sacks cement treated with 2% calcium chloride. Welded casing to conductor pipe, cement with 250 sacks 1:1 Pozmix on outside of casing.
  - 8-24-58 Flanged up and waited on cement. Pressure tested casing with 700 psi., OK.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Shell Oil Company  
Address 705 West Municipal Drive  
Farmington, New Mexico


Original signed by  
By R. S. Mac ALISTER, JR.

Title R. S. Mac Alister, Jr.  
Division Exploitation Engineer

W

(SUBMIT IN TRIPLICATE)

Indian Agency Navajo



UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Allottee Tribal Lands

Lease No. 14-20-603-247

7-H  
9-25

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL		SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO REDRILL OR REPAIR WELL		SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL	<input checked="" type="checkbox"/>		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

September 15, 1958

North Desert Creek

Well No. 44-14 is located 4012.1 ft. from [N] line and 4652 ft. from [W] line of sec. 14

SE 34

(1/4 Sec. and Sec. No.)

118

(Twp.)

23E

(Range)

31W

(Meridian)

Hatherford

(Field)

San Juan

(County or Subdivision)

Utah

(State or Territory)

Kelly Bushing

The elevation of the ~~drill floor~~ drill floor above sea level is 4509 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Status: Well had no significant shows (dry hole).

Casing: 6-5/8" at 1275'

Hole Size 7-7/8" from 1275' to 5353'

4-3/4" from 5353 to total depth 5510'

Proposed Work:

1. With open end drill pipe plug as follows:

a. 35 sacks (5420-5250)

b. 35 sacks (4320-4220)

c. 35 sacks (2270-2170)

d. 35 sacks (1325-1225)

2. Feel for bottom plug if not above 1200', re cement.

3. Install marker with a 10 sack cement cap and abandon in accordance with USGS regulations.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Shell Oil Company

Address 705 West Municipal Drive


Farmington, New Mexico

By B. W. Shepard

Title Exploitation Engineer

(SUBMIT IN TRIPLICATE)

Indian Agency Navajo



UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Allottee Tribal Lands

Lease No. 14-20-603-217

21-K  
10-31

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO REDRILL OR REPAIR WELL	SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT	X
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

October 21, 1958

North Desert Creek  
Well No. 14-14 is located 4612.1 ft. from N line and 4652 ft. from E line of sec. 14

SE SE 14 (1/4 Sec. and Sec. No.)      11S (Twp.)      21E (Range)      SLM (Meridian)  
Rutherford (Field)      San Juan (County or Subdivision)      Utah (State or Territory)

The elevation of the Kelly Bushing ~~derrick floor~~ above sea level is 4589 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Abandonment Works:

1. With open end drill pipe plugged as follows:
  - a. 35 sacks cement (5120-5250) Desert Creek Zone
  - b. 35 sacks cement (4320-4220) Top of Hermosa
  - c. 35 sacks cement (2270-2170) Top of Cutler
  - d. 35 sacks cement (1325-1225) Bottom of surface casing
2. Found top plug at 1209'.
3. Installed marker with a 10 sack cement cap, abandoned 9-15-58.

ELS 5315

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Shell Oil Company

Address 705 West Municipal Drive


Farmington, New Mexico

By B. W. Shepard

Title Exploitation Engineer

W

U. S. LAND OFFICE Tribal Lands  
SERIAL NUMBER 14-20-603-217  
LEASE OR PERMIT TO PROSPECT \_\_\_\_\_

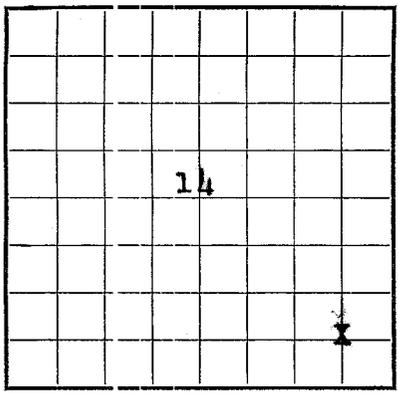

LOCATE WELL CORRECTLY

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company Shell Oil Company Address 705 W. Municipal Dr. Farmington, N.M.  
Lessor or Tract Tribal Lands-North Desert Cr. Field Ratherford State Utah  
Well No. 14-14 Sec. 14 T. 41S R. 23E Meridian SLBM County San Juan  
Location 612.1 ft. N. of N Line and 4652 ft. W. of W Line of Sec. 14 Elevation 4589 KB  
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Original signed by  
B. W. SHEPARD

Date September 24, 1958

Title EXPLOITATION ENGR.

The summary on this page is for the condition of the well at above date.

Commenced drilling August 21, 1958 Finished drilling September 12, 1958

OIL OR GAS SANDS OR ZONES

None (Denote gas by G)

No. 1, from \_\_\_\_\_ to \_\_\_\_\_ No. 4, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

IMPORTANT WATER SANDS

No. 1, from \_\_\_\_\_ to \_\_\_\_\_ No. 3, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 4, from \_\_\_\_\_ to \_\_\_\_\_

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From-	To-	
8 5/8"	28	8	-	1265	Baker	----	--	--	Surface

HISTORY OF OIL OR GAS WELL

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
8 5/8"	1275	500 pozmix + 200	Displacement	--	--

PLUGS AND ADAPTERS

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth set \_\_\_\_\_  
Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

FOLD MARK

FOLD MARK

8 5/8"	1275	500 pozmix + 200	Displacement	--	---

**PLUGS AND ADAPTERS**

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth set \_\_\_\_\_  
 Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

**SHOOTING RECORD**

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

**TOOLS USED**

Rotary tools were used from 0 feet to 5510 feet, and from -- feet to -- feet  
 Cable tools were used from -- feet to -- feet, and from -- feet to -- feet  
 Plugged and abandoned \_\_\_\_\_

**DATES**

September 19 \_\_\_\_\_, 19 58  
 Put to producing \_\_\_\_\_, 19 \_\_\_\_\_  
 The production for the first 24 hours was \_\_\_\_\_ barrels of fluid of which \_\_\_\_\_% was oil; \_\_\_\_\_% emulsion; \_\_\_\_\_% water; and \_\_\_\_\_% sediment. Gravity, °Bé. \_\_\_\_\_  
 If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_  
 Rock pressure, lbs. per sq. in. \_\_\_\_\_

**EMPLOYEES**

H. A. Sheppard \_\_\_\_\_, Driller Moran Bros., Inc.  
 T. M. Ash \_\_\_\_\_, Driller  
 M. E. Ridens \_\_\_\_\_, Driller \_\_\_\_\_, Driller

**FORMATION RECORD**

FROM—	TO—	TOTAL FEET	FORMATION
2097	2142	45	Shinarump
2142	2220	78	Moenkopi
2220	4272	2052	Cutler
4272	5326	1054	Upper Hermosa
5326	--	--	Paradox

1958  
 10 11 11

FROM— TO— TOTAL FEET FORMATION

(OVER)

6-43094-4

**DRILLING REPORT**  
FOR PERIOD ENDING

9-15-58

Ratherford

(FIELD)

San Juan, Utah

(COUNTY)

14

(SECTION OR LEASE)

T11S R23E

(TOWNSHIP OR RANCHO)

DAY	DEPTHS		REMARKS
	FROM	TO	
8-20 to 8-24	0	1613	<p><u>Location:</u> 4612.1'S and 4652'E of NW Corner Sec. 14, T11S, R23E, SLBM, San Juan County, Utah</p> <p><u>Elevations:</u> GR: 4578.1 DF: 4587.5 KB: 4588.7</p> <p>Spudded 1:00 AM 8-21-58. Cemented 13-3/8", 42# conductor pipe at 70' with 60 sacks cement treated with 2% calcium chloride. Ran and cemented 8-5/8" 28# J-55 casing at 1275' with 250 sacks 1:1 pozmix followed by 200 sacks cement treated with 2% calcium chloride, welded casing to conductor pipe, cemented between with 250 sacks 1:1 pozmix. Flanged up and waited on cement. Pressure tested casing and BOP with 700 psi, OK.</p>
8-25 to 9-8	1613	5276	<p><u>Drilled 3663'.</u></p>
9-9 to 9-10	5276	5400	<p>Drilled 77' Cored 47'. (4-3/4" hole) Core #1 5353-5364 Recovered 10.5', Core #2 5364-5378.5 Recovered 13.9', Core #3 5378.5-5393' Recovered 10.8', Core #4 5393-5400 Recovered 2'.</p>
9-11 to 9-15	5400	5510 TD	<p>Drilled 110'. Ran Electrical Survey - stuck at 5360', pulled loose. Ran in with 4-3/4" bit, hit bridge at 2200', pulled, ran 7 7/8" bit, cleaned out, ran 4-3/4" bit, cleaned out to bottom.</p> <p>Attempted to run Gamma Ray-Neutron log-would not go in 4-3/4" hole at 5353'. Pulled and ran 4-3/4" bit, conditioned mud. Reran Gamma Ray Neutron log - would not go, cleaned out bridges, conditioned mud, ran Gamma Ray-Neutron log and Microlog.</p> <p>With open end drill pipe plugged well as follows:</p> <p style="margin-left: 40px;">35 sacks 5510 - 5300 35 sacks 4320 - 4220 35 sacks 2270 - 2170 35 sacks 1325 - 1209</p> <p>Located top plug at 1209'. Installed abandonment markers. Released rig 12:00 noon 9-15-58. Checked BOP daily</p>

CONDITION AT BEGINNING OF PERIOD

HOLE			CASING SIZE	DEPTH SET
SIZE	FROM	TO		
12 1/4"	0	1281	8 5/8"	1275'
7 7/8"	1281	5353		
4 3/4"	5353	5510		
DRILL PIPE SIZES 4 1/2"				

Mud Summary

wt 9.5-9.9 #/ gal.  
vis 35 - 70 sec.  
WL 9 - 35 cc  
FC 2 - 3/32"

Contractor: Moran Brothers, Inc.  
Drillers: H. A. Sheppard  
M. E. Ridens  
T. M. Ash  
Company Pusher: C. L. Christensen

R. D. Coles ROC

SHELL OIL COMPANY

WEEK ENDING \_\_\_\_\_

CORE FROM 5353 TO 5400

CORES EXAMINED BY R. D. Coles

CORE RECORD

AREA OR FIELD North Rutherford

COMPANY Shell Oil Company

LEASE AND WELL NO. NDC 114-11

NO.	FROM	TO	RECOVERED	FORMATIONAL, STRUCTURAL AND PROBABLE PRODUCTIVITY DESCRIPTION OF CORE	SYMBOL	OBSERVED DIP	CORE INDICATIONS
							OIL-GAS
							CORE OR DITC
1	5353	5364	10.4				
	5353	5354		<u>Limestone</u> , Very shaly, ICXA			See Description
	5354	5355		<u>Limestone</u> , light gray, shaly, ICXA			
	5355	5355.5		<u>Limestone</u> , Very shaly, ICXA			
	5355.5	5357		<u>Limestone</u> , Light gray, shaly ICXA			
	5357	5360		<u>Limestone</u> , gray, very dolomitic, shaly, ICXA, anhydritic			
	5360	6363.4		<u>Anhydrite</u>			
2	5364	5378.5	13.9				
	5364	5372		<u>Anhydrite</u>			
	5372	5375		<u>Dolomite</u> , dark gray, limy, very shaly, III XFA, anhydrite-filled fractures in part - carbonaceous material in spots.			
	5375	5376		<u>Limestone</u> , dark gray, very shaly, ICXA, carbonaceous material <sup>in</sup> spots.			
	5376	5377.9		<u>Shale</u> , dark gray, slightly limy in part (2" streak bleeding at top of this interval)			
3	5378.5	5393	10.8				
	5378.5	5381		<u>Limestone</u> , dark gray, very shaly, ICXA			
	5381	5383		<u>Limestone</u> , light gray, shaly, ICXA			
	5383	5392		<u>Limestone</u> , light gray, ICXA, 1-5% spotty oil stain and odor.			
	5392	5293		<u>Limestone</u> , dark gray, slightly dolomitic, I/III CXA (Lost recovery not on bottom-probably lost in intervals 81-84 and 84-92)			

SHELL OIL COMPANY

WEEK ENDING \_\_\_\_\_

CORE FROM 5353 TO 5400

CORES EXAMINED BY R. D. Coles

CORE RECORD

AREA OR FIELD Ratherford

COMPANY Shell Oil Company

LEASE AND WELL NO. NDC 44-14

NO.	FROM	TO	RECOVERED	FORMATIONAL, STRUCTURAL AND PROBABLE PRODUCTIVITY DESCRIPTION OF CORE	SYMBOL	OBSERVED DIP	CORE INDICATIONS
							OIL-GAS
							CORE OR DITC
4	5393	5400	2	<p><u>Limestone</u>, dark gray, slightly dolomitic in upper part, I-III CXA, slightly shaly in bottom part.</p>			<p>See description.</p>
	5393	5395					