

# FILE NOTATIONS

Entered in NID File ✓  
 Entered On S R Sheet ✓  
 Location Map Pinned ✓  
 Card Indexed ✓  
 I W R for State or Fee Land \_\_\_\_\_

Checked by Chief RHS  
 Copy NID to Field Office ✓  
 Approval Letter ✓  
 Disapproval Letter \_\_\_\_\_

## COMPLETION DATA:

Date Well Completed 6-18-61  
 OW \_\_\_\_\_ WW \_\_\_\_\_ TA \_\_\_\_\_  
 GW \_\_\_\_\_ OS \_\_\_\_\_ PA ✓

Location Inspected RHS  
 Bond released \_\_\_\_\_  
 State of Fee Land \_\_\_\_\_


## LOGS FILED

Driller's Log 6-19-61

Electric Logs (No. ) 3

E \_\_\_\_\_ I-E ✓ E-I \_\_\_\_\_ GR \_\_\_\_\_ GR-N ✓ Micro \_\_\_\_\_  
 Lat. \_\_\_\_\_ Mi-L \_\_\_\_\_ Sonic (2) Others \_\_\_\_\_

Copy to H.C. R.D.



(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office Utah  
Lease No. U-016397  
Unit \_\_\_\_\_

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

April 10, 1961

**Culbertson Government**  
Well No. 21-6 is located 610 ft. from N line and 2026 ft. from W line of sec. 6

NE NW Sec. 6      35E      22E      S12R4M  
(1/4 Sec. and Sec. No.)      (Twp.)      (Range)      (Meridian)  
Wildcat      San Juan      Utah  
(Field)      (County or Subdivision)      (State or Territory)

The elevation of ~~ground surface~~ above sea level is 7880 ft. ungraded ground.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Propose to drill well to a depth of approximately 6100' to test Paradox Formation.

Will set approximately 80' of 13-3/8" conductor pipe with cement circulated to surface.

Will set 400' or more of 8-5/8" surface pipe with cement circulated to surface.

Will set 5-1/2" casing through any commercial production encountered.


I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company The Superior Oil Company

Address P. O. Drawer 'G'  
Cortez, Colorado

Original Signed By  
By D. D. KINGMAN  
D. D. Kingman  
Title Engineer

# CERTIFICATE OF SURVEY

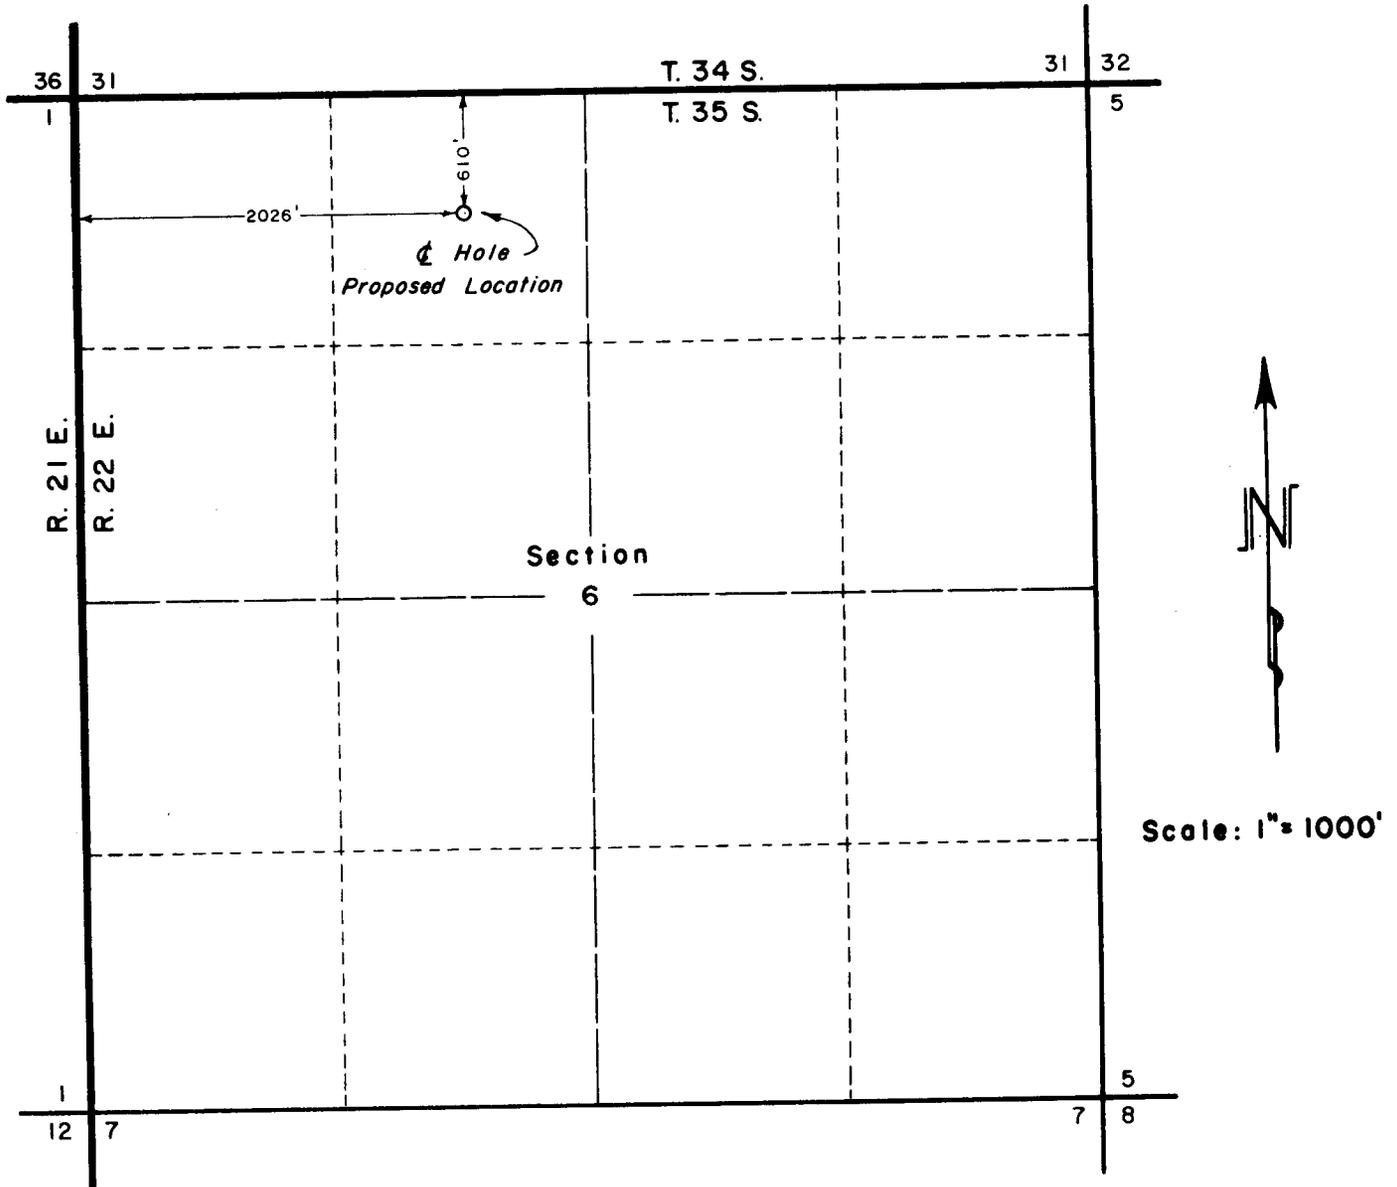

## WELL LOCATION: The Superior Oil Co.— Culbertson Gov't. No. 21-6

Located 2026 feet East of the West line and 610 feet South of the North line of Section 6,  
 Township 35 South, Range 22 East, Salt Lake Base & Meridian,  
 San Juan County, Utah  
 Existing ground elevation determined at 7880 feet based on U.S.G.S. datum.



I certify the above plat represents a survey  
 under my supervision and is accurate to the  
 best of my knowledge and belief.

*Elmer M. Clark*  
 \_\_\_\_\_  
 ELMER M. CLARK  
 Registered Land Surveyor  
 State of Utah # 2307

**E.M. CLARK & ASSOCIATES**  
 Durango, Colorado

April 4, 1961  
 File No. 61023

**April 12, 1961**

**The Superior Oil Company  
P. O. Drawer 'G'  
Cortez, Colorado**

**Attn: D. D. Kingman, Engineer**

**Gentlemen:**

**This is to acknowledge receipt of your notice of intention to drill Well No. Gilbertson Government 21-6, which is to be located 610 feet from the north line and 2026 feet from the west line of Section 6, Township 35 South, Range 22 East, S12M, San Juan County, Utah.**

**Please be advised that insofar as this office is concerned approval to drill said well is hereby granted.**

**This approval terminates within 90 days if the above mentioned well has not been spudded in within said period.**

**Very truly yours,**

**OIL & GAS CONSERVATION COMMISSION**

**GLENN B. FREIGHT,  
EXECUTIVE SECRETARY**

**CBF:mgg**

**cc: Jerry W. Long, Dist. Eng.  
U. S. Geological Survey**

**H. L. Coonts - OGCC, Moab**


Copy to HC

RSD

Budget Bureau No. 42-R368.4  
Approval expires 12-31-60.

*any*

Form 9-381a  
(Feb. 1951)



(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office Utah  
Lease No. U-016397  
Unit \_\_\_\_\_

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....		SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....	<b>X</b>		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

June 16, \_\_\_\_\_, 19 61

**Calbertson Government**  
Well No. 21-6 is located 610 ft. from [N] line and 2026 ft. from [W] line of sec. 6

NE NW Sec. 6      35E      22E      SL64M  
(¼ Sec. and Sec. No.)      (Twp.)      (Range)      (Meridian)

Wildcat      San Juan      Utah  
(Field)      (County or Subdivision)      (State or Territory)

The elevation ~~of the land surface~~ above sea level is 7880 ft. Ungraded ground.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Because no commercial production was found in the course of drilling this well, it is proposed to plug and abandon the well by equalizing the following cement plugs:

- No. 1 50 sacks through drill pipe hung to 5740'.
- No. 2 50 sacks through drill pipe hung to 4690'.
- No. 3 50 sacks through drill pipe hung to 3000'.
- No. 4 50 sacks through drill pipe hung to 2085'.
- No. 5 50 sacks through drill pipe hung to 950'.

Verbal approval 6-16-61.


I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company The Superior Oil Company

Address P. O. Drawer 'G'  
Cortez, Colorado

By D. D. Kingman  
D. D. Kingman  
Title Engineer

U. S. LAND OFFICE Utah  
 SERIAL NUMBER U-016397  
 LEASE OR PERMIT TO PROSPECT \_\_\_\_\_

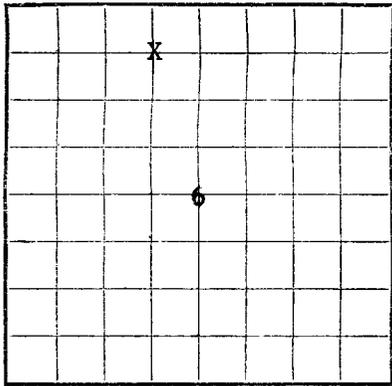

LOCATE WELL CORRECTLY

UNITED STATES  
 DEPARTMENT OF THE INTERIOR  
 GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company The Superior Oil Company Address P. O. Drawer 'G', Cortez, Colorado  
 Lessor or Tract Culbertson Government Field Wildcat State Utah  
 Well No. 21-6 Sec. 6 T. 35S R. 22E Meridian SLB&M County San Juan  
 Location 610 ft. N of N Line and 2026 ft. E of W Line of Section 6 Elevation 7880'  
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Original Signed By \_\_\_\_\_  
 Signed E. D. KINGMAN  
D. D. Kingman Title Engineer

Date July 17, 1961

The summary on this page is for the condition of the well at above date.

Commenced drilling May 3, 1961 Finished drilling June 18, 1961

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from None to \_\_\_\_\_ No. 4, from \_\_\_\_\_ to \_\_\_\_\_  
 No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_  
 No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

IMPORTANT WATER SANDS

No. 1, from None to \_\_\_\_\_ No. 3, from \_\_\_\_\_ to \_\_\_\_\_  
 No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 4, from \_\_\_\_\_ to \_\_\_\_\_

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
13-3/8"	25.6#	8 1/2	Slip Jo	88'	Float	None	None	Conductor	
8-5/8"	22#	8	Slip Jo	355'	None	None	None	Surface	

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
13-3/8"	88'	100	Circulated to surface.		
8-5/8"	950'	355	Circulated to surface.		

PLUGS AND ADAPTERS

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth set \_\_\_\_\_  
 Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

SHOOTING RECORD

FOLD MARK




note

Copy to HC

RJD

Form 9-331a  
(Feb. 1961)

Budget Bureau No. 42-R368.4  
Approval expires 12-31-60.



(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office **Utah**  
Lease No. **U-016397**  
Unit \_\_\_\_\_

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	<b>X</b>
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	<b>X</b>
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

July 17, 19 61

**Culbertson Government**

Well No. **21-6** is located **610** ft. from **N** line and **2026** ft. from **W** line of sec. **6**

**NE NW Section 6** **358** **22E** **S126M**  
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
**Wildcat** **San Juan** **Utah**  
(Field) (County or Subdivision) (State or Territory)

The elevation of the ~~abandonment~~ floor above sea level is **7880** ft. **ungraded ground.**

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

SPUDDED: May 3, 1961

ABANDONED: June 18, 1961

TOTAL DEPTH: 3860'

CASING: 13-3/8" set at 85' with 100 sacks.  
8-5/8" set at 950' with 355 sacks.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **The Superior Oil Company**

Address **P. O. Drawer 'G'**

**Cortez, Colorado**

Original Signed By

By **D. D. KINGMAN**  
**D. D. Kingman**  
Title **Engineer**

DDK/njh

JUL 19 1961

<b>LOG TOPS:</b>	Entrada	821'	Wolfcamp	4060'
	Carmel	963'	Hermosa	4680'
	Navajo	1065'	Ismy	5542'
	Chinle	2090'	Gothic Shale	5738'
	Organ Rock	3090'	Desert Creek	5792'
	Udarr Mesa	3390'	Chimney Rock	5842'

**DRILL STEM TESTS**

DST #1 4684'-4725' 1/2 hour initial shut in, 1/2 hour test - no blow, 1/2 hour final shut in. Rec. 10' of drilling mud.

ISIP 50#	F.P.	0#	FSIP	0#
HP 2185#				

Plugged and abandoned by equalizing the following cement plugs.

- Plug #1 50 sacks through DP at 5740'
- Plug #2 50 sacks through DP at 4690'
- Plug #3 50 sacks through HP at 3090'
- Plug #4 50 sacks through DP at 2085'
- Plug #5 50 sacks through DP at 950'

Checked top of plug #5 at 825'. Placed 10 sack plug at surface and erected standard dry hole marker.

The rig is now stacked on location, we will notify you when the location has been cleaned up.