

FILE NOTATIONS

Entered in NID File ✓
 Entered On S R Sheet 7
 Location Map Pinned ✓
 Card Indexed ✓
 I W R for State or Fee Land _____

Checked by Chief PMB
 Copy NID to Field Office ✓
 Approval Letter ✓
 Disapproval Letter _____

COMPLETION DATA:

Date Well Completed 7-15-63 Location Inspected USGS
 OW _____ WW _____ TA _____ Bond released _____
 GW _____ OS _____ PA ✓ State of Fee Land _____

LOGS FILED

Driller's Log 7-25-63
 Electric Logs (No.) 2
 E _____ L _____ E-I ✓ GR _____ GR-N _____ Micro _____
 Lat _____ Mi-L _____ Sonic -G.R. ✓ Others _____


Subsequent Report of [Signature]

8-23-91 JCR

2404 H. L. E.

(SUBMIT IN TRIPLICATES)

Indian Agency _____



UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Window Rock

Allottee Navajo Tribal

Lease No. 14-20-603-360

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO REDRILL OR REPAIR WELL		SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

June 17, 19 63

Navajo 'T'
Well No. #12-3 is located 2095 ft. from $\left\{ \begin{matrix} N \\ S \end{matrix} \right\}$ line and 605 ft. from $\left\{ \begin{matrix} E \\ W \end{matrix} \right\}$ line of sec. 3

SW NW Section 3 T42S R25E SL66M
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)

Wildcat San Juan County Utah
(Field) (County or Subdivision) (State or Territory)

The elevation of the ~~surface~~ existing ground above sea level is 4545 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Propose to drill a well into the Chimney Rock formation to an approximate depth of 5750' to test for oil and gas.

Plan to set the following casing strings:

- 1) 100' of 13-3/8" conductor pipe with cement circulated to surface.
- 2) 1600' of 8-5/8" surface casing with cement circulated to surface.
- 3) 5 1/2" production casing through any commercial shows of oil or gas with casing cemented through all such zones.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company THE SUPERIOR OIL COMPANY

Address P. O. DRAWER 'G'

CORTEZ, COLORADO

ORIGINAL SIGNED BY
J. C. GORDY

By J. C. Gordy
Title Drilling Engineer

June 19, 1953

Superior Oil Company
P. O. Drawer 'G'
Cortez, Colorado

Attention: J. C. Gordy, Drilling Engineer

Gentlemen:

This is to acknowledge receipt of your notice of intention to drill Well No. Navajo 'T' #12-3, which is to be located 2095 feet from the north line and 605 feet from the west line of Section 3, Township 42 South, Range 25 East, S1E1M, San Juan County, Utah.

Please be advised that insofar as this office is concerned approval to drill said well is hereby granted.

As soon as you have determined that it will be necessary to plug and abandon the above mentioned well, you are hereby requested to immediately notify the following:

PAUL W. BURCHELL, Chief Petroleum Engineer
Office: DA 8-5771 or DA 8-5772
Home: CR 7-2890
Salt Lake City, Utah

This approval terminates within 90 days if the above mentioned well has not been spudded in within said period.

Enclosed please find Form CGCC-8-X, which is to be completed

June 19, 1963

if water sands (aquifers) are encountered while drilling, particularly assessable near surface water sands.

Your cooperation with respect to completing this form will be greatly appreciated.

Very truly yours,

OIL & GAS CONSERVATION COMMISSION

CLEON B. FEIGHT
EXECUTIVE DIRECTOR

CBF:cnp

cc: P. T. McGrath, District Engineer
U. S. Geological Survey
Farmington, New Mexico

Harvey L. Coonts, Petroleum Engineer
Oil & Gas Conservation Commission
Moab, Utah

copy
file
6/10

copy filed

Form approved.
Budget Bureau No. 42-R369.4.

*PHE
DW
Z*

Form 9-331b
(April 1952)

(SUBMIT IN TRIPLICATE)


Indian Agency _____

Window Rock

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Allottee Navajo Tribal

Lease No. 14-20-603-360



SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL		SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO REDRILL OR REPAIR WELL		SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL	X		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

July 15, 19 63

Navajo 'T'
Well No. #12-3 is located 2095 ft. from $\left[\begin{smallmatrix} N \\ S \end{smallmatrix} \right]$ line and 605 ft. from $\left[\begin{smallmatrix} E \\ W \end{smallmatrix} \right]$ line of sec. 3

SW NW Section 3	42S	R25E	SLB&M
($\frac{1}{4}$ Sec. and Sec. No.)	(Twp.)	(Range)	(Meridian)
Wildcat	San Juan County	Utah	
(Field)	(County or Subdivision)	(State or Territory)	

kelly bushing
The elevation of the ~~drill floor~~ above sea level is 4519 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

- Propose to equalize the following cement plugs for abandonment:
- #1) With D.P. @ 5495', equalize 135 sks common cement. (Calc top 5045', top Ismay 5160')
 - #2) With D.P. @ 4350', equalize 50 sks common cmt. (Calc top 4175', top Hermosa 4282')
 - #3) With D.P. @ 4225', equalize 50 sks common cmt. (Calc top 2250', top DeChelly 2345')
 - #4) With D.P. @ 1650', equalize 50 sks common cmt. w/2% CaCl. (Calc top 1475', base 8-5/8" casing at 1578')
 - #5) Place 10 sks common cmt. in top of 8-5/8" casing.
- Weld steel plate to csg. stub & erect std dry hole marker.

The above procedure was verbally approved by Mr. P. T. McGrath, USGS, Farmington, New Mexico on 7/12/63.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company THE SUPERIOR OIL COMPANY

Address P. O. DRAWER 'G'
CORTEZ, COLORADO


By J. C. Gordy
Title Drilling Engineer

ORIGINAL SIGNED BY
J. C. GORDY

JCG/njh

N.

U. S. LAND OFFICE Salt Lake
SERIAL NUMBER 14-20-603-360
LEASE OR PERMIT TO PROSPECT Nav. Tribal

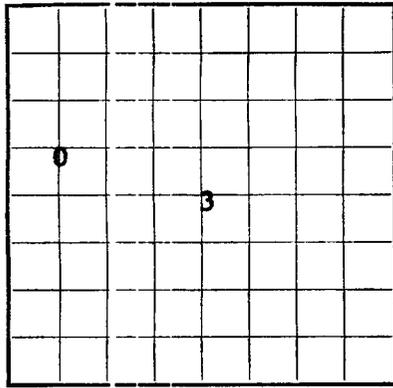

LOCATE WELL CORRECTLY

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company The Superior Oil Company Address P. O. Drawer 'G', Cortez, Colorado
Lessor of Tract Navajo 14-20-603-360 Field Wildcat State Utah
Well No 12-3 Sec. 3 T. 42S R. 25E Meridian SLB&M County San Juan
Location 2095 ft. N. } of N. Line and 605 ft. { E. } of W. Line of Section 3 Elevation 4538'
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed _____
J. C. Gordy
Title Drilling Engineer

Date July 16, 1963

The summary on this page is for the condition of the well at above date.

Commenced drilling June 23, 1963 Finished drilling July 15, 1963

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from None to _____ No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from None to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
<u>13-3/8"</u>	<u>51.0</u>	<u>8rd</u>	<u>Spang</u>	<u>1578'</u>	<u>Float</u>				<u>Conduit for Surface</u>

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>13-3/8"</u>	<u>115'</u>	<u>125</u>	<u>Circ to surface</u>		
<u>8-5/8"</u>	<u>1578'</u>	<u>592</u>	<u>Circ to surface</u>		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____

Adapters—Material _____ Size _____

SHOOTING RECORD

FOLD MARK

FOLD MARK

13-3/8	115'	125	Circle to surface
8-5/8	1578'	592	Circle to surface

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
 Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
None						

TOOLS USED

Rotary tools were used from surface feet to 5495' feet, and from _____ feet to _____ feet
 Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

_____, 19____ Put to producing July 1-15-65 _____, 19____
Dry & Abandoned
 The production for the first 24 hours was _____ barrels of fluid of which _____% was oil; _____%
 emulsion; _____% water; and _____% sediment. Gravity, °Bé. _____
 If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
 Rock pressure, lbs. per sq. in. _____

EMPLOYEES


~~Mountain States Drig. Company~~ Driller _____, Driller
 _____, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
			<p>LOG TOPS:</p> <p>De Chelly 2332'</p> <p>Organ Rock 2572'</p> <p>Hermosa 4290'</p> <p>Ismay 5157'</p> <p>Gothic Shale 5317'</p> <p>Desert Creek 5392'</p> <p>Chimney Rock 5466'</p>

Supp. H. L. E.

SW



(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Indian Agency _____

Window Rock

Allottee Navajo Tribal

Lease No. 14-20-603-360

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL _____	SUBSEQUENT REPORT OF WATER SHUT-OFF _____	
NOTICE OF INTENTION TO CHANGE PLANS _____	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING _____	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF _____	SUBSEQUENT REPORT OF ALTERING CASING _____	
NOTICE OF INTENTION TO REDRILL OR REPAIR WELL _____	SUBSEQUENT REPORT OF REDRILLING OR REPAIR _____	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE _____	SUBSEQUENT REPORT OF ABANDONMENT _____	X
NOTICE OF INTENTION TO PULL OR ALTER CASING _____	SUPPLEMENTARY WELL HISTORY _____	X
NOTICE OF INTENTION TO ABANDON WELL _____		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

July 16, 1963

Navajo 'T'
Well No. #12-3 is located 2095 ft. from N line and 605 ft. from W line of sec. 3

SW NW Section 3 T42S R25E SLB&M
(¼ Sec. and Sec. No.) (Twp.) (Range) (Meridian)

Wildcat San Juan County Utah
(Field) (County or Subdivision) (State or Territory)

The elevation of the ~~surface~~ kelly bushing above sea level is 4539 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

TOTAL DEPTH: 5495' in the Chimney Rock formation.
SPUD: June 23, 1963
ABANDONED: July 15, 1963
CASING: 13-3/8" Conductor set at 115' with 125 sacks circ to surface.
8-5/8" Surface set at 1578' with 592 sacks circ to surface.

LOGGING PROGRAM: Induction Electric and Gamma Ray Sonic with caliper.

<u>FORMATION TOPS (From Logs):</u>	<u>De Chelly</u>	<u>2332'</u>	<u>Gothic Shale</u>	<u>5317'</u>
	<u>Organ Rock</u>	<u>2572'</u>	<u>Desert Creek</u>	<u>5392'</u>
	<u>Hermosa</u>	<u>4290'</u>	<u>Chimney Rock</u>	<u>5466'</u>
	<u>Ismay</u>	<u>5157'</u>		

(OVER)

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company THE SUPERIOR OIL COMPANY

Address P. O. DRAWER 'G'

CORTEZ, COLORADO

By _____

J. C. Gordy

Title Drilling Engineer

CORES: #1) 7374'-7412' cut 38', Rec. 38'

3' - Sh, blk, poker chip - 15' Anhydrite - 10' Sh, blk, limsy - 5' Ls, gry, shaley -
2' Ls, gry, dense, very shaley - 3' Anhydrite, shaley

#2) 7412-7472' Cut 60' - Rec. 45'

7' Dolo, fn xin, brn, w/beds anhydrite - 5' Anhydrite, dolomitic - 2' Dolo, tan,
fn xin, tight, hard, NS - 2' Dolo, anhydritic - 9' Ls, gry, course xin, no poros,
NS - 1' Dolo, gry, fn xin, tight


DST'g: None

PLUGGING: Equalized the following cement plugs for abandonment:

- 1) 135 sks reg. cement with D.P. at 5495' (Calc fill 5075')
- 2) 50 sks reg. cement with D.P. at 4350' (Calc fill 4150')
- 3) 50 sks reg. cement with D.P. at 2425' (Calc fill 2300')
- 4) 50 sks reg. cement 2% CaCl added with D.P. at 1650'. Ran in and checked top
of plug at 1498' (8-5/8" casing set at 1578')
- 5) 10 sks reg. cement placed in top of 8-5/8" casing.


A steel plate was welded to top of casing and a standard dry hole marker
erected.

JUL 2 7 1968

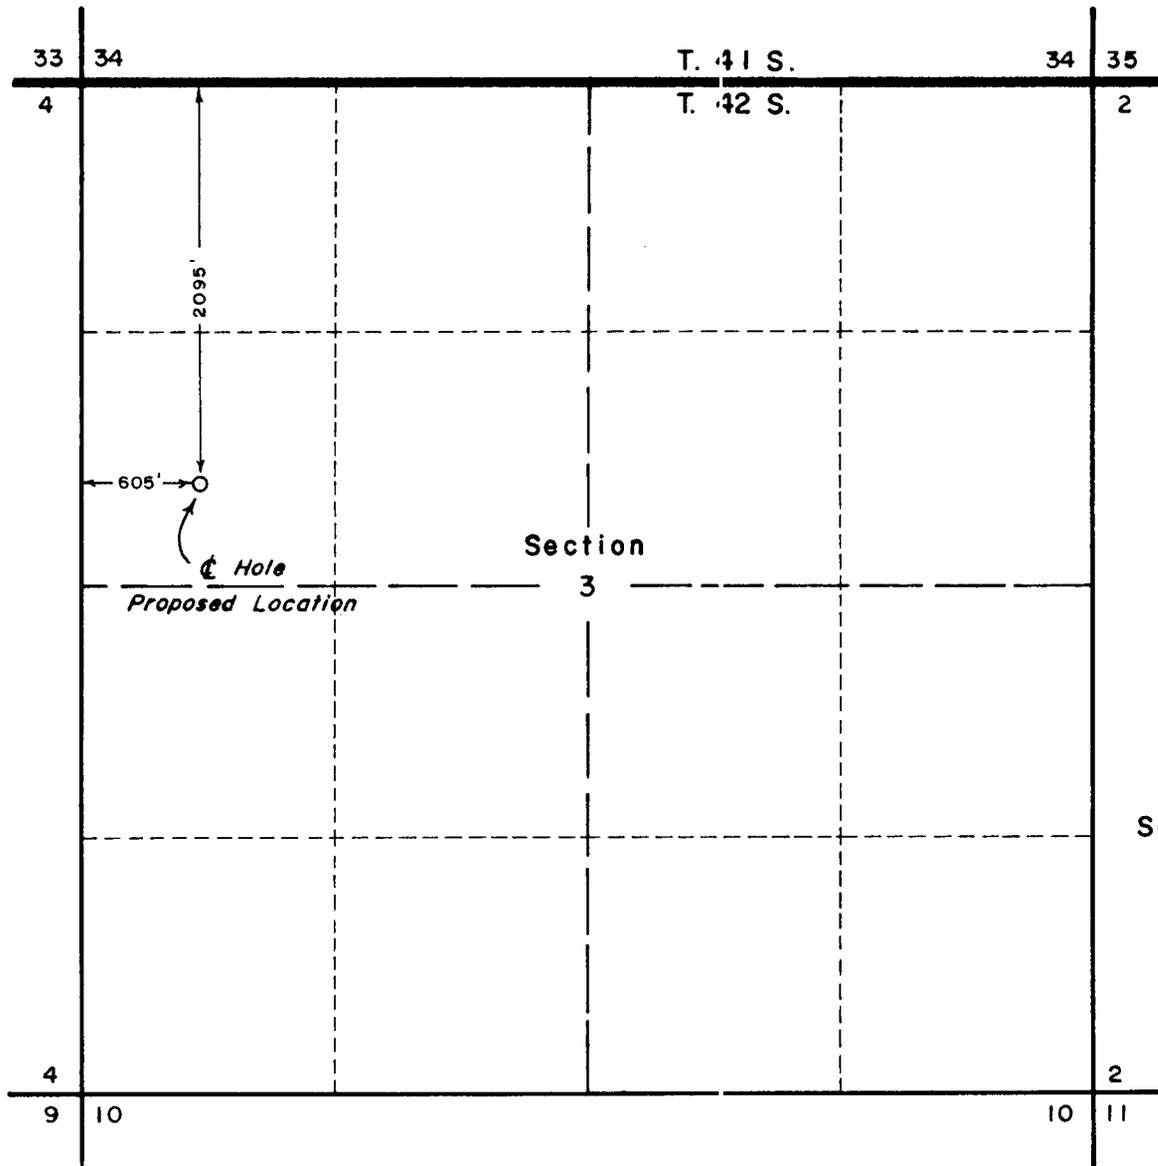

WELL LOCATION: The Superior Oil Company - Navajo "T" # 12-3

Located 2095 feet South of the North line and 605 feet East of the West line of Section 3,
 Township 42 South, Range 25 East, Salt Lake Base & Meridian
 San Juan Co., Utah
 Existing ground elevation determined at 4545 feet based on adjoining well locations.

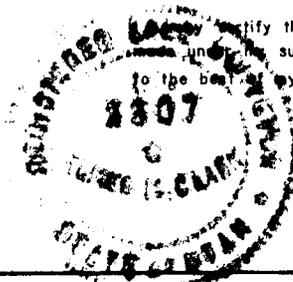

I certify the above plat represents a survey
 made under my supervision and that it is accurate
 to the best of my knowledge and belief.

E. Mer M. Clark

E. MER M. CLARK
 Registered Land Surveyor
 State of Utah #2307

THE SUPERIOR OIL CO.	
WELL LOCATION PLAT Sec. 3 - T42S-R25E San Juan Co., Utah	
E.M. CLARK & ASSOC. Durango, Colorado	DATE: June 13, 1963 FILE NO: 63037

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

ALLOTTEE Navajo
TRIBE Navajo
LEASE NO. 14-20-603-365

LESSEE'S MONTHLY REPORT OF OPERATIONS

State Utah County San Juan Field _____

The following is a correct report of operations and production (including drilling and producing wells) for the month of July, 1963,

Agent's address _____ P.O. Drawer 'G' Company The Superior Oil Company
Cortez, Colorado _____ Signed _____
D. D. KINGMAN

Phone _____ 565-3733 Agent's title Production Engineer

SEC. AND 1/4 OF 1/4	TWP.	RANGE	WELL NO.	DAYS PRODUCED	BARRELS OF OIL	GRAVITY	CU. FT. OF GAS (In thousands)	GALLONS OF GASOLINE RECOVERED	BARRELS OF WATER (If none, so state)	REMARKS (If drilling, depth; if shut down, cause; date and result of test for gasoline content of gas)
<u>NAVAJO "L" LEASE</u>										
NE NE15	42S	26E	4115							Operations Suspended

NOTE.—There were No runs or sales of oil; No M. cu. ft. of gas sold;

No runs or sales of gasoline during the month. (Write "no" where applicable.)

NOTE.—Report on this form is required for each calendar month, regardless of the status of operations, and must be filed in duplicate with the supervisor by the 6th of the succeeding month, unless otherwise directed by the supervisor.