

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING

APPLICATION FOR PERMIT TO DRILL, DEEPEN		5. LEASE DESIGNATION AND SERIAL NO. EDA-2060065609	
1a. TYPE OF WORK DRILL <input checked="" type="checkbox"/> DEEPEN <input type="checkbox"/> RE-ENTER <input type="checkbox"/>		6. IF INDIAN, ALLOTTEE OR TRIBE NAME UTE	
1b. TYPE OF WELL		7. UNIT AGREEMENT NAME N/A	
OIL <input checked="" type="checkbox"/> GAS <input type="checkbox"/> OTHER <input type="checkbox"/> SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>		8. FARM OR LEASE NAME	
2. NAME OF OPERATOR Newfield Production Company		9. WELL NO. UTE TRIBAL 16-22-4-2	
3. ADDRESS AND TELEPHONE NUMBER: Route #3 Box 3630, Myton, UT 84052 Phone: (435) 646-3721		10. FIELD AND POOL OR WILDCAT Undesignated Monument State	
4. LOCATION OF WELL (FOOTAGE) At Surface SE/SE 836' FSL 582' FEL 577782x 40.11558 At proposed Producing Zone 4440775x-110.68724		11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SE/SE Sec. 22, T4S, R2W	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE* Approximately 8.4 miles southwest of Myton, UT		12. County Duchesne	13. STATE UT
15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any) Approx. 582' f/lse line and NA' f/unit line	16. NO. OF ACRES IN LEASE NA	17. NO. OF ACRES ASSIGNED TO THIS WELL 40	
18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR ON THIS LEASE, FT. NA	19. PROPOSED DEPTH 6800'	20. ROTARY OR CABLE TOOLS Rotary	
21. ELEVATIONS (Show whether DF, RT, GR, etc.) 5354' GL		22. APPROX. DATE WORK WILL START* 3rd Quarter 2007	

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT/FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4	8 5/8	24#	290'	155 sx +/- 10%
7 7/8	5 1/2	15.5#	TD	275 sx lead followed by 450 sx tail
				See Detail Below

DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give date on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

*The actual cement volumes will be calculated off of the open hole logs, plus 15% excess:

SURFACE PIPE - 155 sx Class G Cement +/I 10%, w/ 2% CaCl₂ & 1/4#/sk Cello-flake
Weight: 15.8 PPG YIELD: 1.17 Cu Ft/sk H₂O Req: 5 gal/sk

LONG STRING - Lead: Premium Lite II Cement + 3lbs/sk BA-90 + 3% KCl + .25 lbs/sk Cello Flake + 2 lbs/sk Kol Seal + 10% Bentonite + .5% Sodium Metasilicate
Weight: 11.0 PPG YIELD: 3.43 Cu Ft/sk H₂O Req: 21.04 gal/sk

Tail: 50-50 Poz-Class G Cement + 3% KCl + .25 lbs/sk Cello Flake + 2% Bentonite + .3% Sodium Metasilicate
Weight: 14.2 PPG YIELD: 1.59 Cu Ft/sk H₂O Req: 7.88 gal/sk

24. Name & Signature: *Mandie Crozier* Title: Regulatory Specialist Date: 5/1/2007
Mandie Crozier

(This space for State use only)

API Number Assigned: 43013-33635

APPROVAL:

**Approved by the
Utah Division of
Oil, Gas and Mining**

**Federal Approval of this
Action is Necessary**

Date: 05-16-07

By: *[Signature]*

*See Instructions On Reverse Side

RECEIVED

MAY 03 2007



DIV. OF OIL, GAS & MINING

T4S, R2W, U.S.B.&M.


NEWFIELD PRODUCTION COMPANY

N89°57'W - 80.32 (G.L.O.)

WELL LOCATION, UTE TRIBAL 16-22-4-2,
LOCATED AS SHOWN IN THE SE 1/4 SE
1/4 OF SECTION 22, T4S, R2W, U.S.B.&M.
DUCHESNE COUNTY, UTAH.

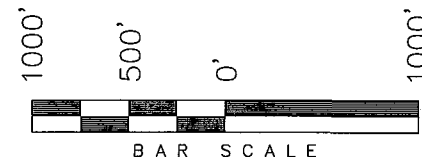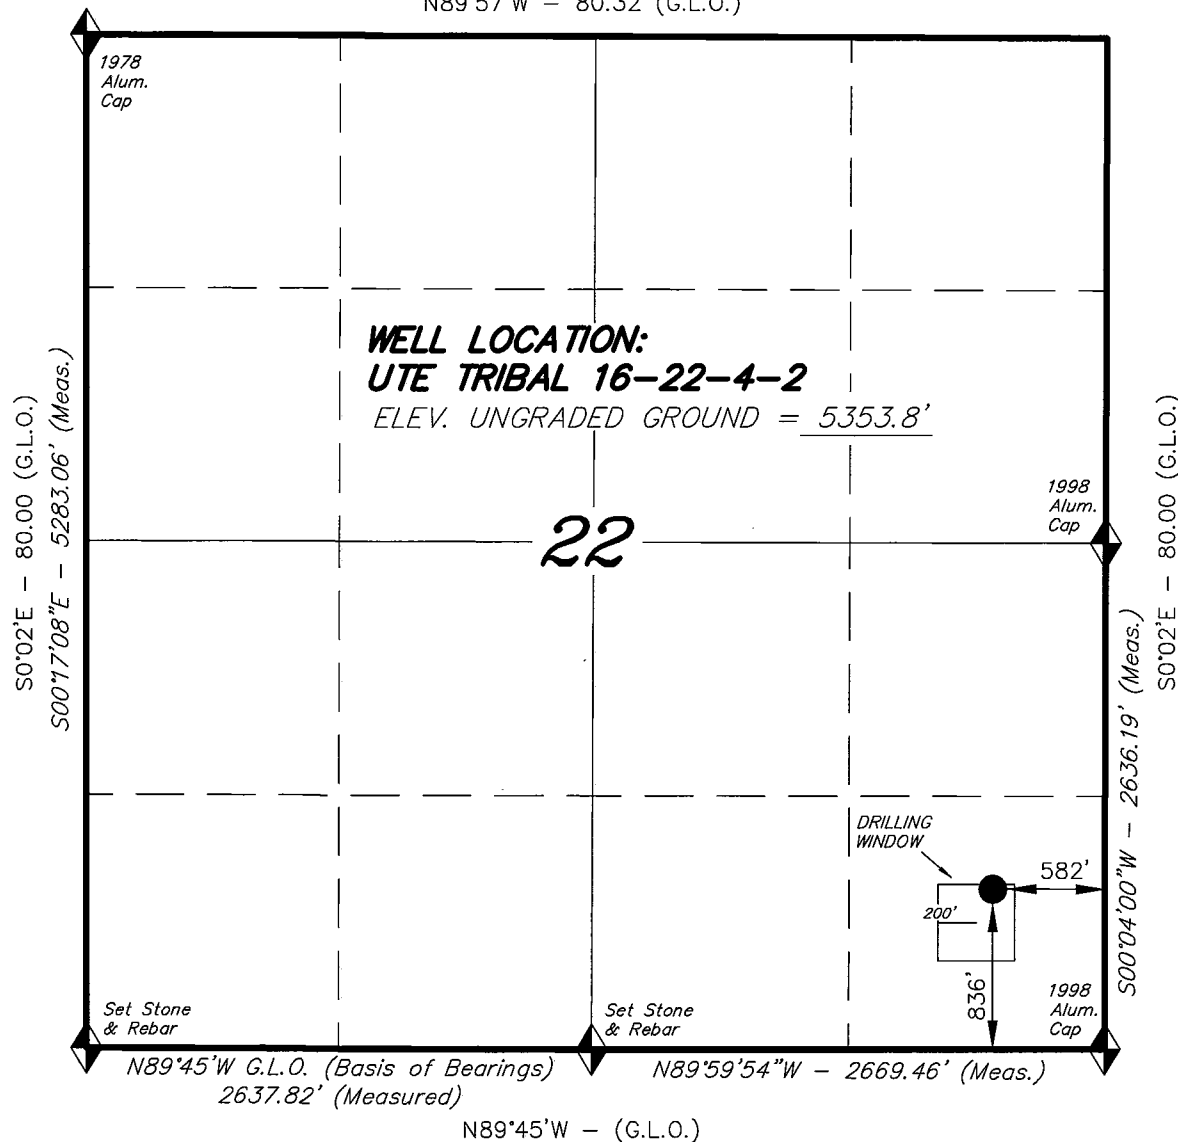

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS
PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS
MADE BY ME OR UNDER MY SUPERVISION AND THAT
THE SAME ARE TRUE AND CORRECT TO THE BEST OF
MY KNOWLEDGE AND BELIEF. No. 189377

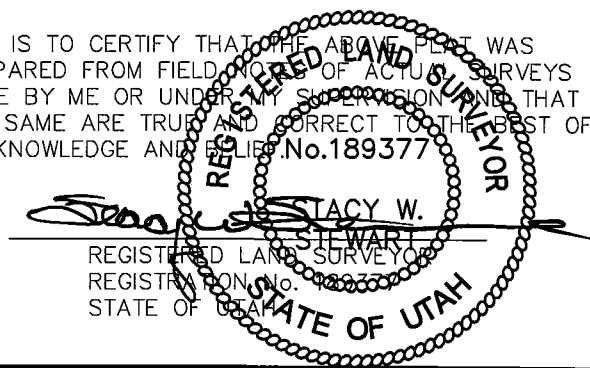

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV;
U.S.G.S. 7-1/2 min QUAD (MYTON SE)

**UTE TRIBAL 16-22-4-2
(Surface Location) NAD 83
LATITUDE = 40° 06' 55.89"
LONGITUDE = 110° 05' 16.90"**

TRI STATE LAND SURVEYING & CONSULTING
180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501

DATE SURVEYED: 03-16-07	SURVEYED BY: C.M.
DATE DRAWN: 04-04-07	DRAWN BY: T.C.J.
REVISED:	SCALE: 1" = 1000'

NEWFIELD PRODUCTION COMPANY
UTE TRIBAL #16-22-4-2
SE/SE SECTION 22, T4S, R2W
DUCHESNE COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. GEOLOGIC SURFACE FORMATION:

Uinta formation of Upper Eocene Age

2. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:

Uinta	0 – 2950'
Green River	2950'
Wasatch	6800'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:

Green River Formation 2950' – 6800' – Oil

4. PROPOSED CASING PROGRAM:

Surface Casing: 8-5/8" J-55 24# w/ST&C collars; set at 290' (New)

Production Casing: 5-1/2" J-55, 15.5# w/LT&C collars; set at TD (New or used, inspected).

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to Exhibit C for a diagram of BOP equipment that will be used on this well.

6. TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:

A fresh water/polymer system will be utilized to drill the well. If necessary, to control formation fluids, the system will be weighted with the addition of bentonite gel, and if conditions warrant, barite. This fresh water system typically will contain Total Dissolved Solids (TDS) of less than 3000 PPM. Neither potassium chloride nor chromates will be utilized in the fluid system. The anticipated mud weight is 8.4 ppg and weighted as necessary for gas control.

AIR DRILLING

In the event that the proposed location is to be "Air Drilled", Newfield requests a variance to regulations requiring a straight run blooie line. Newfield proposes that the flowline will contain two (2) 90-degree turns. Newfield also requests a variance to regulations requiring an automatic igniter or continuous pilot light on the blooie line. Newfield requests authorization to ignite as needed, and the flowline at 80'.

Newfield Production Company requests that the spark arrest, exhaust, or water cooled exhaust be waived under the Special Drilling Operations of Onshore Order #2.

MUD PROGRAM

Surface – 3200'
3200' – TD'

MUD TYPE

fresh water system
fresh water system

From surface to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCL substitute additive. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite. No chromate additives will be used in the mud system.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 290' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

The anticipated maximum bottom hole pressure is 1800 psi. It is not anticipated that abnormal temperatures will be encountered; or that any other abnormal hazards such as H₂S will be encountered in this area.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the third quarter of 2007, and take approximately seven (7) days from spud to rig release.

NEWFIELD PRODUCTION COMPANY
UTE TRIBAL #16-22-4-2
SE/SE SECTION 22, T4S, R2W
DUCHESNE COUNTY, UTAH

THIRTEEN POINT SURFACE PROGRAM

1. EXISTING ROADS

See attached **Topographic Map "A"**

To reach Newfield Production Company well location site Ute Tribal 16-22-4-2 located in the SE¼ SE¼ Section 22, T4S, R2W, S.L.B. & M., Duchesne County, Utah:

Proceed in a southwesterly direction out of Myton, Utah along Highway 40 approximately 1.9 miles to the junction of this highway and Utah State Highway 53; proceed southwesterly along Utah State Highway 53 approximately 1.7 miles to its junction with an existing road to the southeast; proceed southeasterly approximately 3.7 miles to its junction with the beginning of an existing two track road to be upgraded; proceed southwesterly approximately 2,700' to its junction with the beginning of the proposed access road; continue in a southwesterly direction along the proposed access road approximately 2,380'; turn in a southerly direction and proceed along the proposed access road approximately another 720' to the propose well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

Approximately 3,100' of access road is proposed. See attached **Topographic Map "B"**.

The proposed access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%.

There will be no culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

Refer to **EXHIBIT B**.

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Fresh water purchased from the Johnson Water District will be used for drilling. A temporary poly pipeline may be used for water transportation from our existing supply line from Johnson Water District, or trucked from Newfield Production Company's injection facilities – **EXHIBIT A**.

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte,

Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E) or at State of Utah approved surface disposal facilities.

8. **ANCILLARY FACILITIES:**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT:**

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

a) **Producing Location**

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

b) **Dry Hole Abandoned Location**

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP:** Clinton Moon, Duchesne, Utah. See attached Easement, Right-of-Way and Surface Use Agreement.

12. **OTHER ADDITIONAL INFORMATION:**

- a) Newfield Production Company is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, Newfield is to immediately stop work that might further disturb such materials and contact the Authorized Officer.
- b) Newfield Production will control noxious weeds along rights-of-way for roads, pipelines, well sites or other applicable facilities. On State administered land it is required that a Pesticide Use Proposal shall be submitted and given approval prior to the application of herbicides or other possible hazardous chemicals.
- c) Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on State Lands after the conclusion of drilling operations or at any other time without State authorization. However, if State authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

The Archaeological Report Waiver for this location is attached.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the Ute Tribal 16-22-4-2, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the Ute Tribal 16-22-4-2 Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

The State office as well as the Ute Tribe Energy and Mineral Department shall be notified upon site completion prior to moving on the drilling rig.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative


Name: Kim Kettle
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification

Please be advised that Newfield Production Company is considered to be the operator of well #16-22-4-2, SE/SE Section 22, T4S, R2W, Duchesne County, Utah and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by US Specialty Insurance #B002792.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

Date 5/1/07


Mandie Crozier
Regulatory Specialist
Newfield Production Company

MEMORANDUM
of
EASEMENT, RIGHT-OF-WAY
and
SURFACE USE AGREEMENT

This Easement, Right-of-Way and Surface Use Agreement ("Agreement") is entered into this 22nd day of March, 2007 by and between **Clinton Moon whose address is HC 64 Box 113 Duchesne, Utah 84021** ("Surface Owner," whether one or more) and Newfield Production Company, a Texas corporation ("NEWFIELD"), with offices at 1401 17th Street, Suite #1000, Denver, Colorado 80202, covering certain lands, (the "Lands") situated in Duchesne County, Utah described as follows:

Township 4 South, Range 2 West
SE, NESW, SWSW, SESW, Section 22

Duchesne County, Utah

being, 280 acres more or less,

and associated roads and pipeline routes beginning at each wellsite and traversing the lands as shall be agreed upon prior to the construction of same.

RECEIVED
MAY 03 2007
DIV. OF OIL, GAS & MINING

For and in consideration of the sum of ten dollars (\$10.00), and other valuable consideration, the receipt and sufficiency of which are hereby acknowledged, the undersigned hereby agree to the terms and provisions set forth as follows:

1. Compensation for Well; Release of All Claims

NEWFIELD shall pay to Surface Owner the sum as set forth in and according to the terms of that certain Letter Agreement for Easement, Right-of Way and Surface Use by and between Surface Owner and NEWFIELD, dated April 1, 2007, as full payment and satisfaction for any and all detriment, depreciation, injury or damage of any nature to the Lands or growing crops thereon that may occur as a result of NEWFIELD's drilling or completion operations or its continuing activities for the production or transportation of oil, gas, or other hydrocarbons or products associated with the foregoing including, but not limited to, surface use, access, pipelines, gathering lines, pipeline interconnections, and any and all other reasonable or customary uses of land related to said operations or activities.

2. Grant of Right of Way and Easement


Surface Owner hereby grants, bargains, leases, assigns, and conveys to NEWFIELD an easement and right-of-way for the purpose of construction, using and maintaining access roads, locations for surface equipment and subsurface gathering lines for each well drilled upon the Lands, pipelines, and pipeline interconnections for two years from date of this agreement and so long thereafter as NEWFIELD's oil and gas leases remain in effect.

This Agreement shall be binding upon the respective heirs, executors, administrators, successors, and assigns of the undersigned.

These Parties hereto have executed this document effective as of the day first above written.

SURFACE OWNER

NEWFIELD PRODUCTION COMPANY

By: 
Clinton Moon, Surface Owner

By: _____
Gary D. Packer, President

STATE OF UTAH)
COUNTY OF Duchesne)ss

This instrument was acknowledged before me this 22 day of March, 2007 by
Clinton Moon

Witness my hand and official seal.



My commission expires

January 11, 2008

Marcia H. Huling
Notary Public

STATE OF COLORADO)
COUNTY OF Denver)ss

This instrument was acknowledged before me this _____, 2007 by
Gary D. Packer, as President of Newfield Production Company, a Texas corporation, on behalf of the corporation.

Witness my hand and official seal.

Notary Public


My commission expires _____

NEWFIELD PRODUCTION COMPANY

UTE TRIBAL 16-22-4-2

Section 22, T4S, R2W, U.S.B.&M.

DRAINAGE INFO

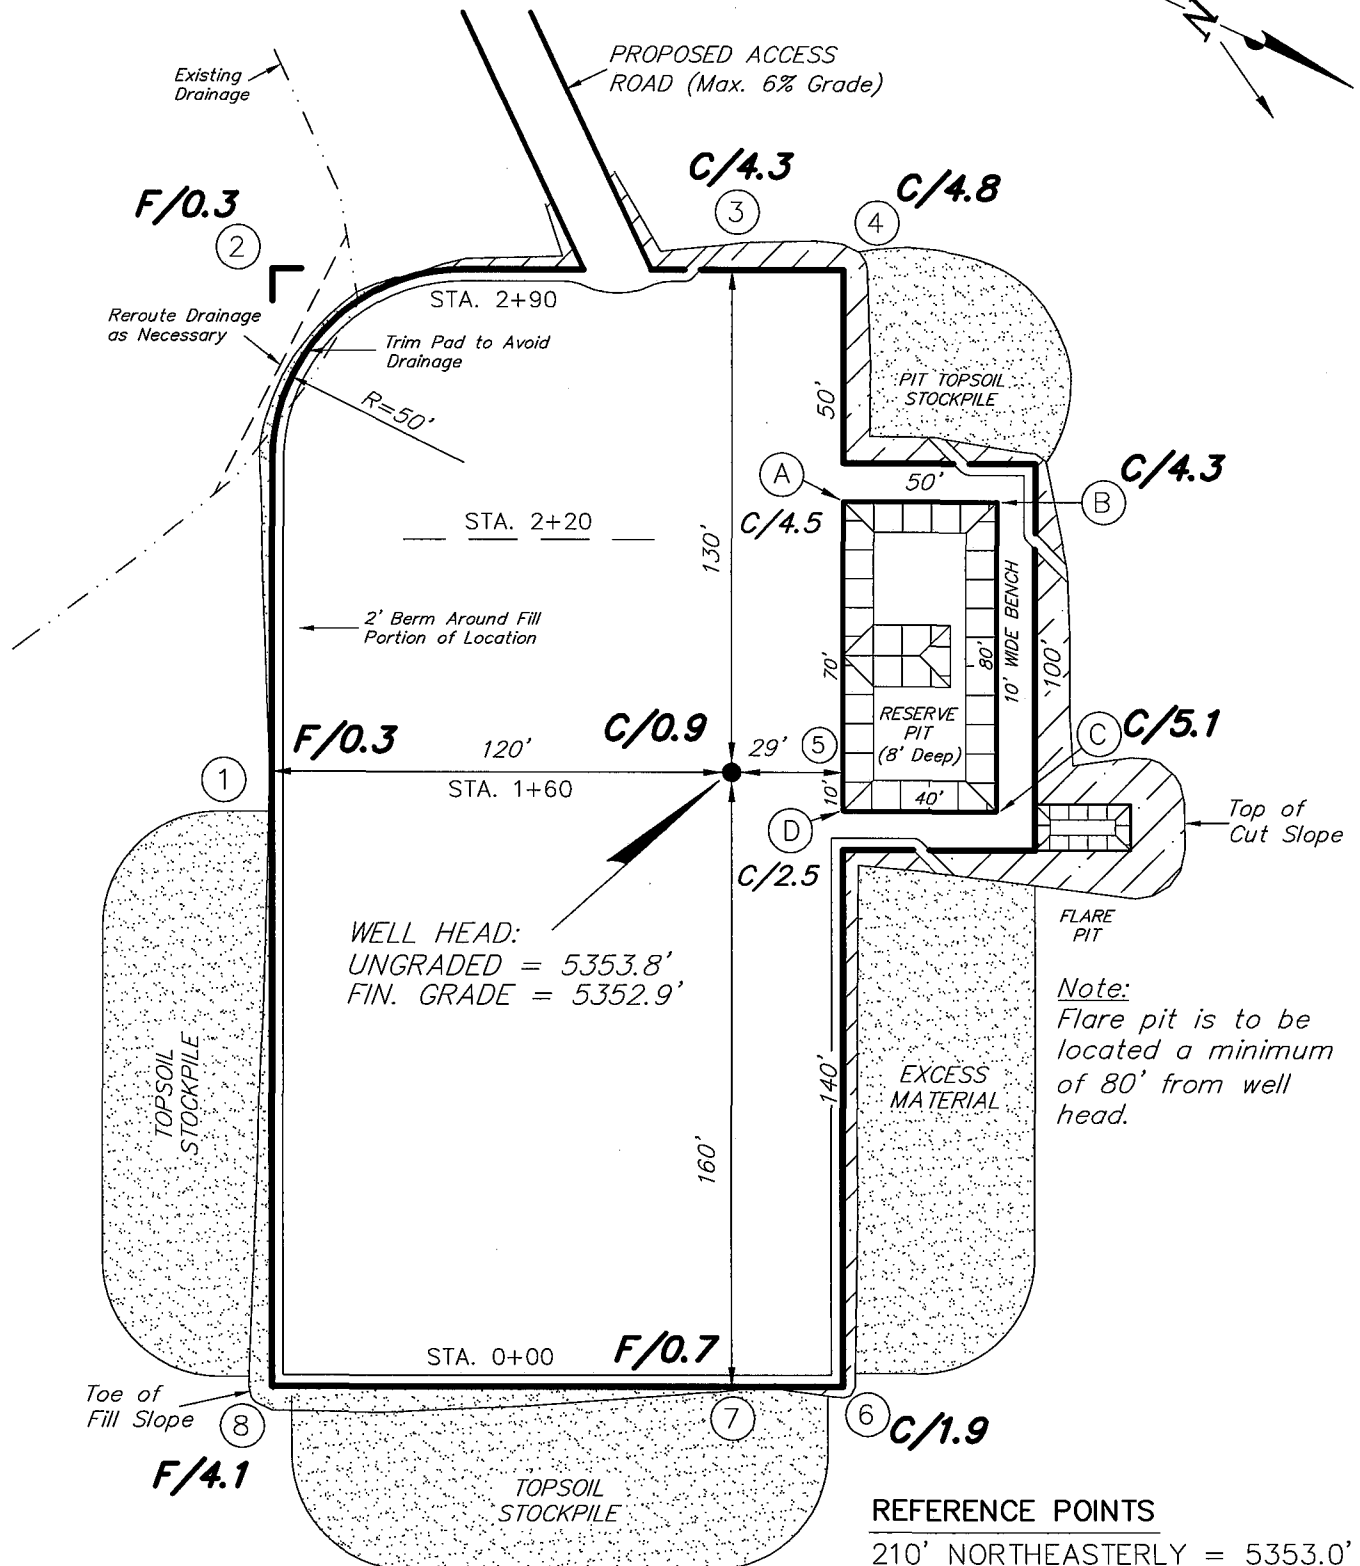

REFERENCE POINTS

210' NORTHEASTERLY = 5353.0'
260' NORTHEASTERLY = 5353.1'
170' SOUTHEASTERLY = 5349.6'
220' SOUTHEASTERLY = 5348.3'

SURVEYED BY: C.M.

SCALE: 1" = 50'

DRAWN BY: T.C.J.

DATE: 04-04-07





Tri State
Land Surveying, Inc.

(435) 781-2501

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD PRODUCTION COMPANY

CROSS SECTIONS UTE TRIBAL 16-22-4-2

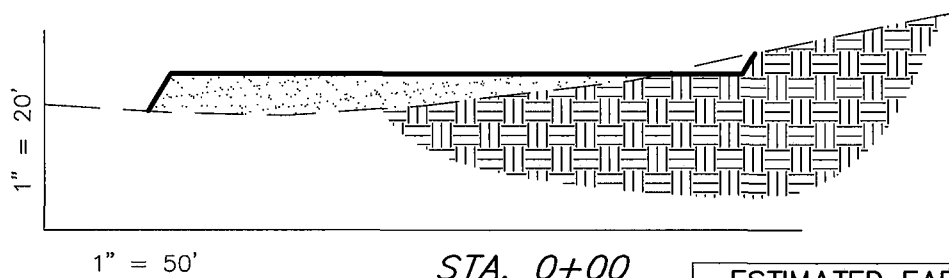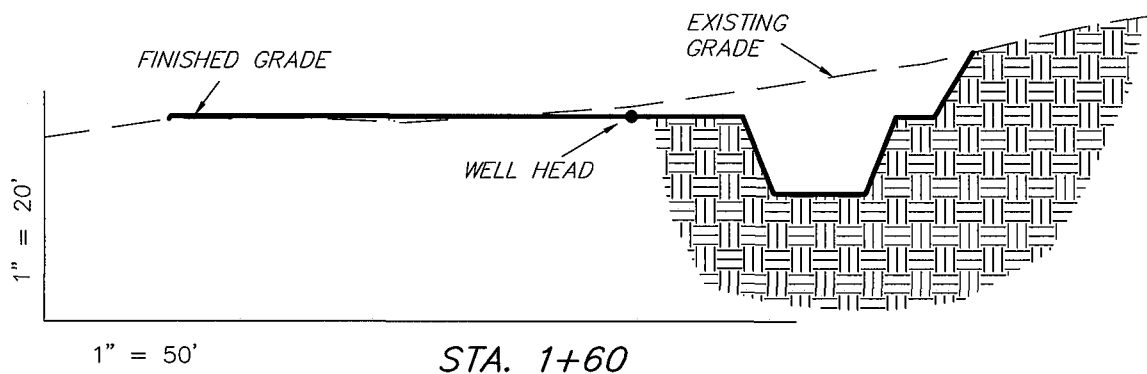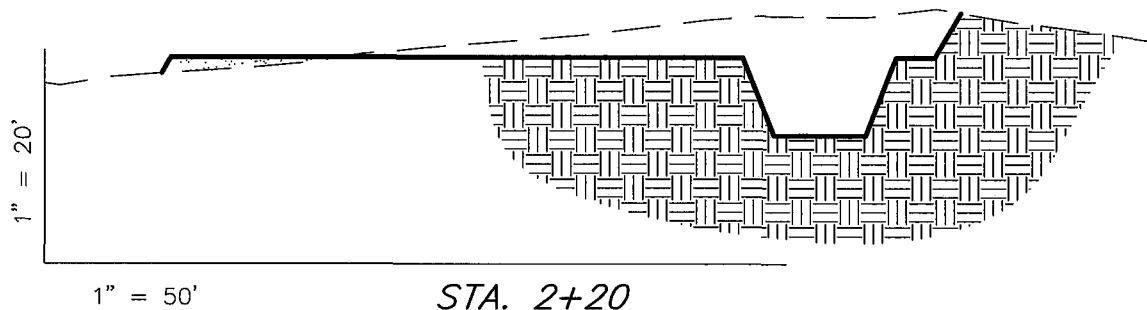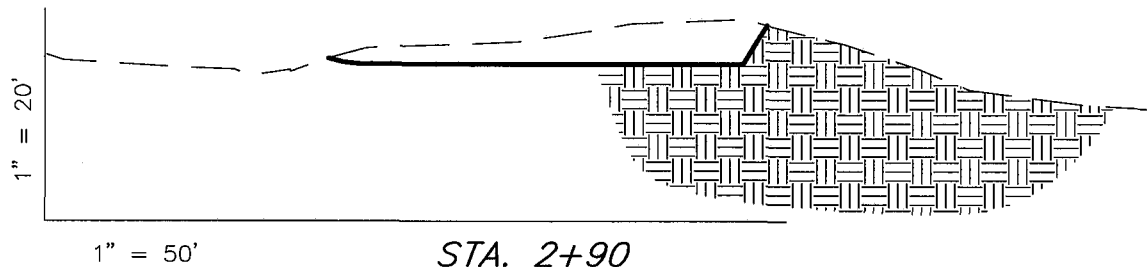

NOTE:
UNLESS OTHERWISE NOTED
ALL CUT/FILL SLOPES ARE
AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES (No Shrink or swell adjustments have been used) (Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	1,930	1,930	Topsoil is not included in Pad Cut	0
PIT	640	0		640
TOTALS	2,570	1,930	980	640

SURVEYED BY: C.M.


SCALE: 1" = 50'


DRAWN BY: T.C.J.


DATE: 04-04-07

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078
(435) 781-2501

FIELD PRODUCTION COMPANY
TYPICAL RIG LAYOUT
UTE TRIBAL 16-22-4-2

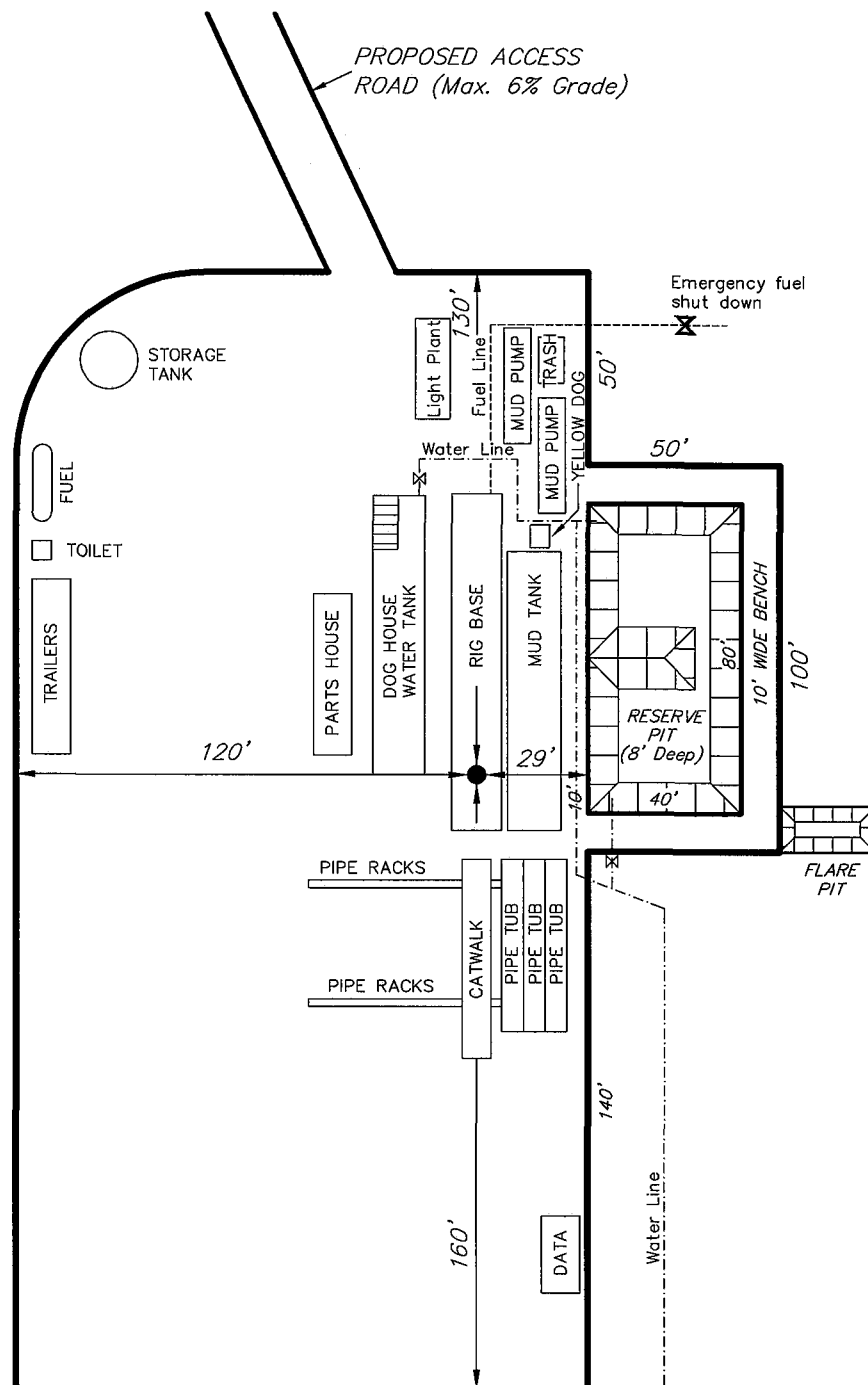

SURVEYED BY: C.M.	SCALE: 1" = 50'	 Tri State Land Surveying, Inc. 180 NORTH VERNAL AVE. VERNAL, UTAH 84078	(435) 781-2501
DRAWN BY: T.C.J.	DATE: 04-04-07		

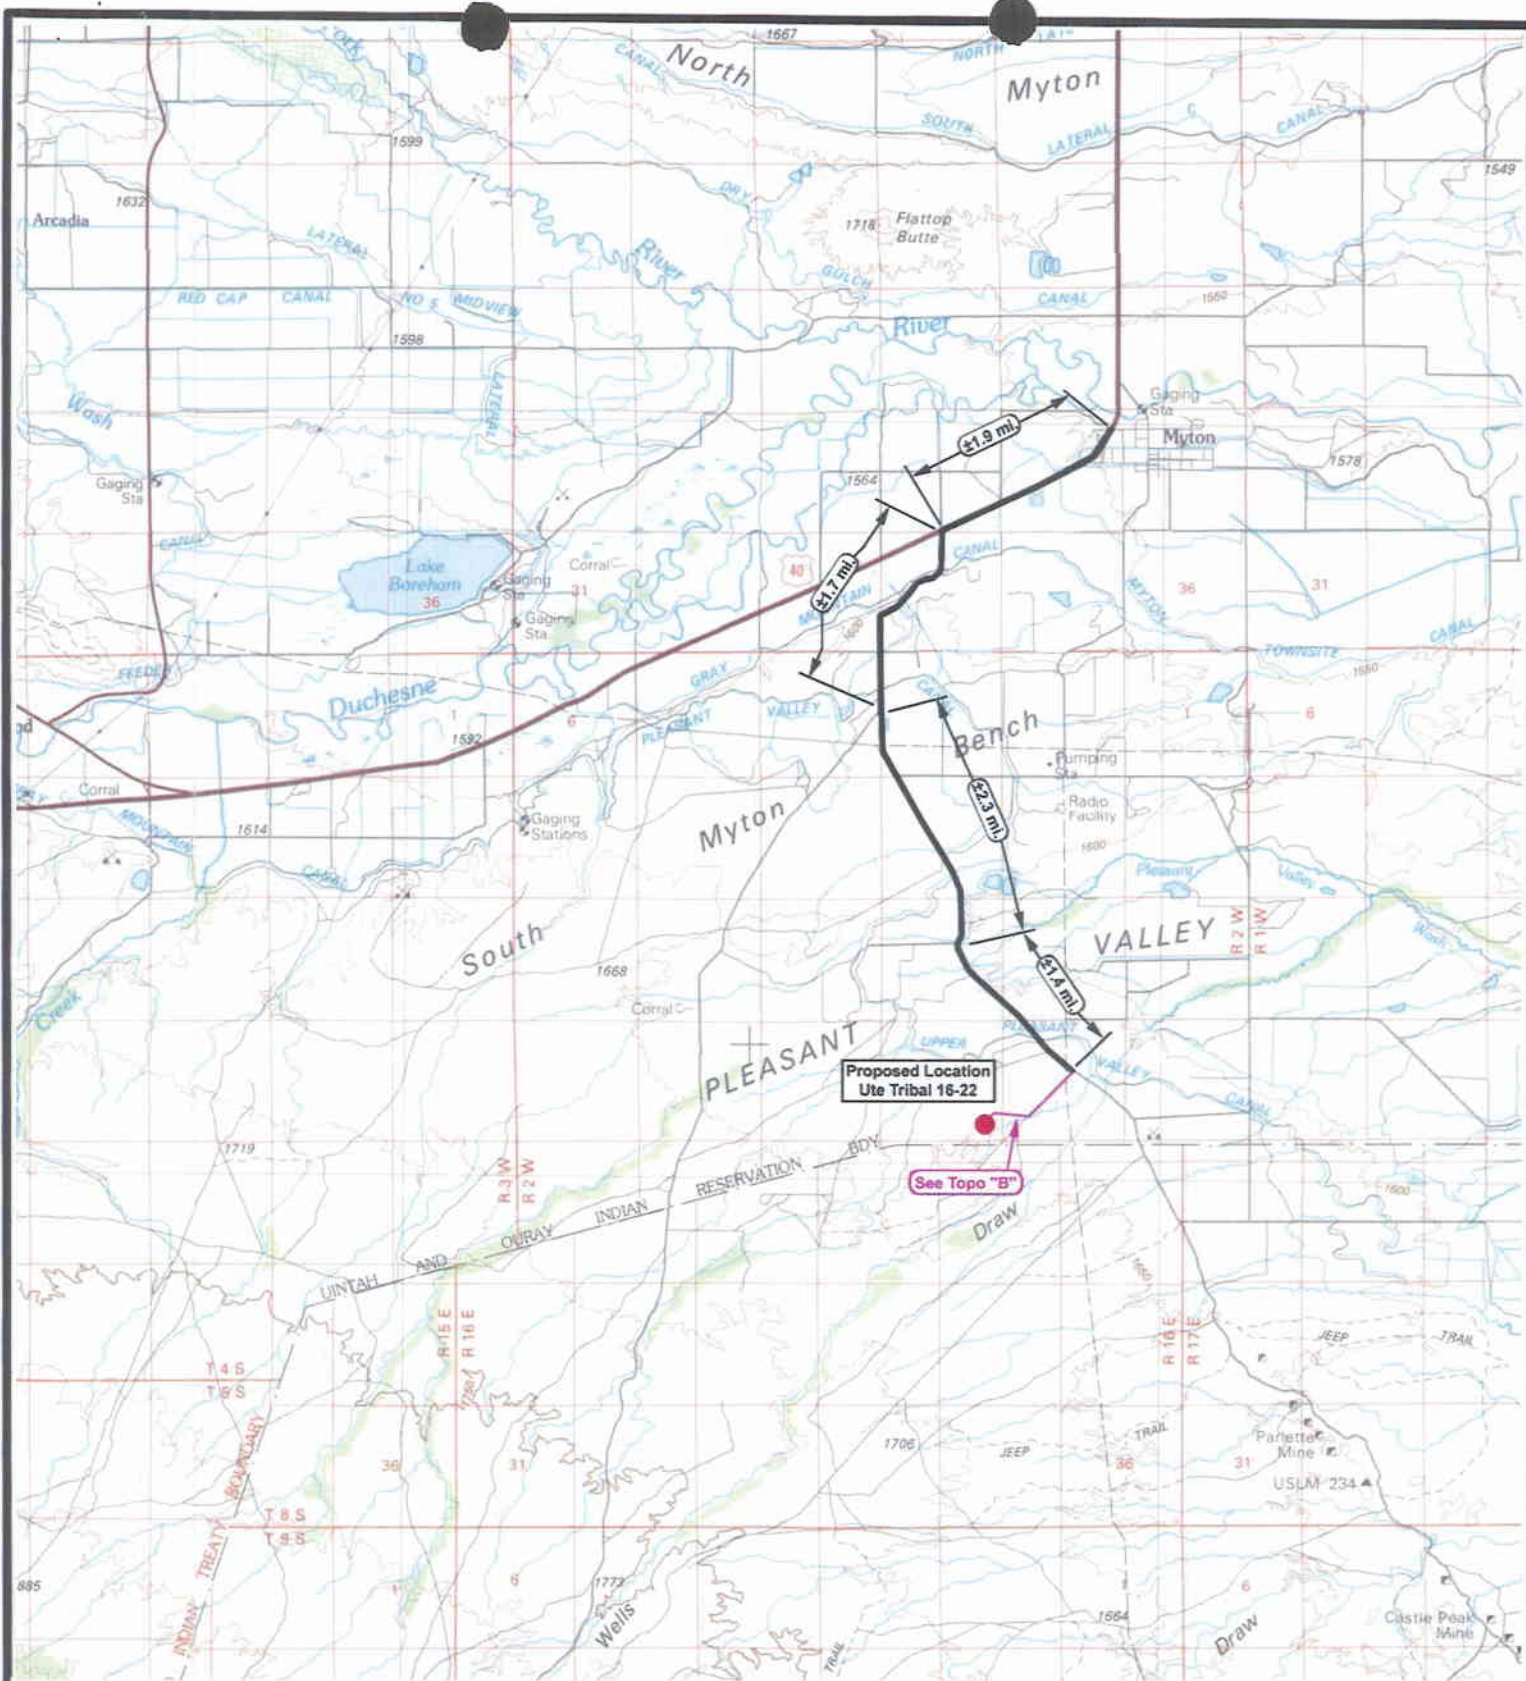

NEWFIELD
Exploration Company

Ute Tribal 16-22-4-2
SEC. 22, T4S, R2W, U.S.B.&M.



Tri-State
Land Surveying Inc.
(435) 781-2501

38 West 100 North Vernal, Utah 84078

SCALE: 1 = 100,000

DRAWN BY: mw

DATE: 04-05-2007


Legend

Existing Road

Proposed Access

TOPOGRAPHIC MAP

"A"

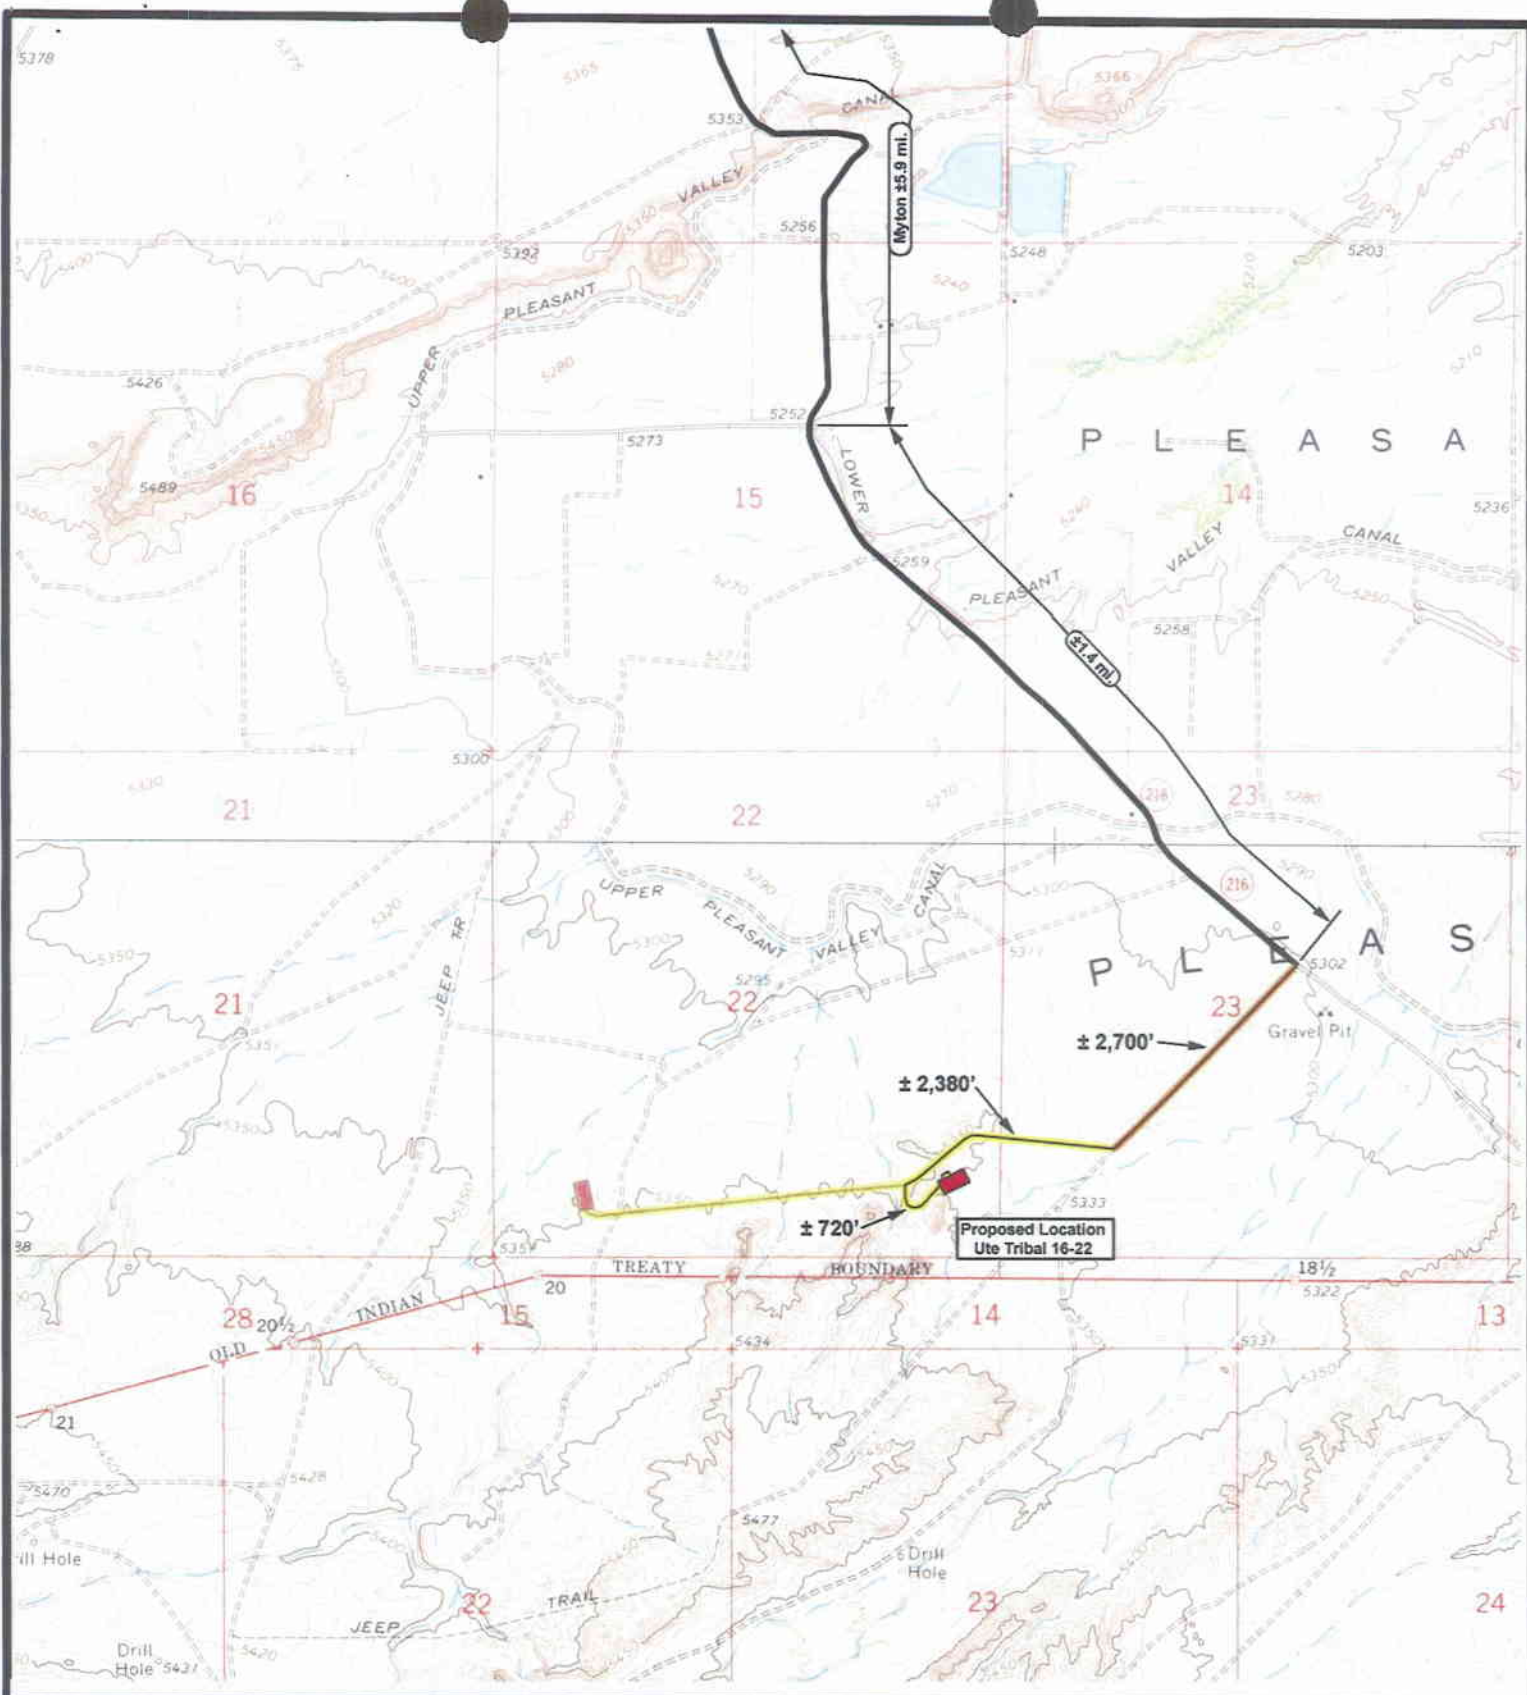

NEWFIELD
Exploration Company

Ute Tribal 16-22-4-2
SEC. 22, T4S, R2W, U.S.B.&M.



Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2000'

DRAWN BY: mw


DATE: 04-05-2007

Legend

- Existing Road
- Proposed Access
- Existing Two-Track

TOPOGRAPHIC MAP

"B"

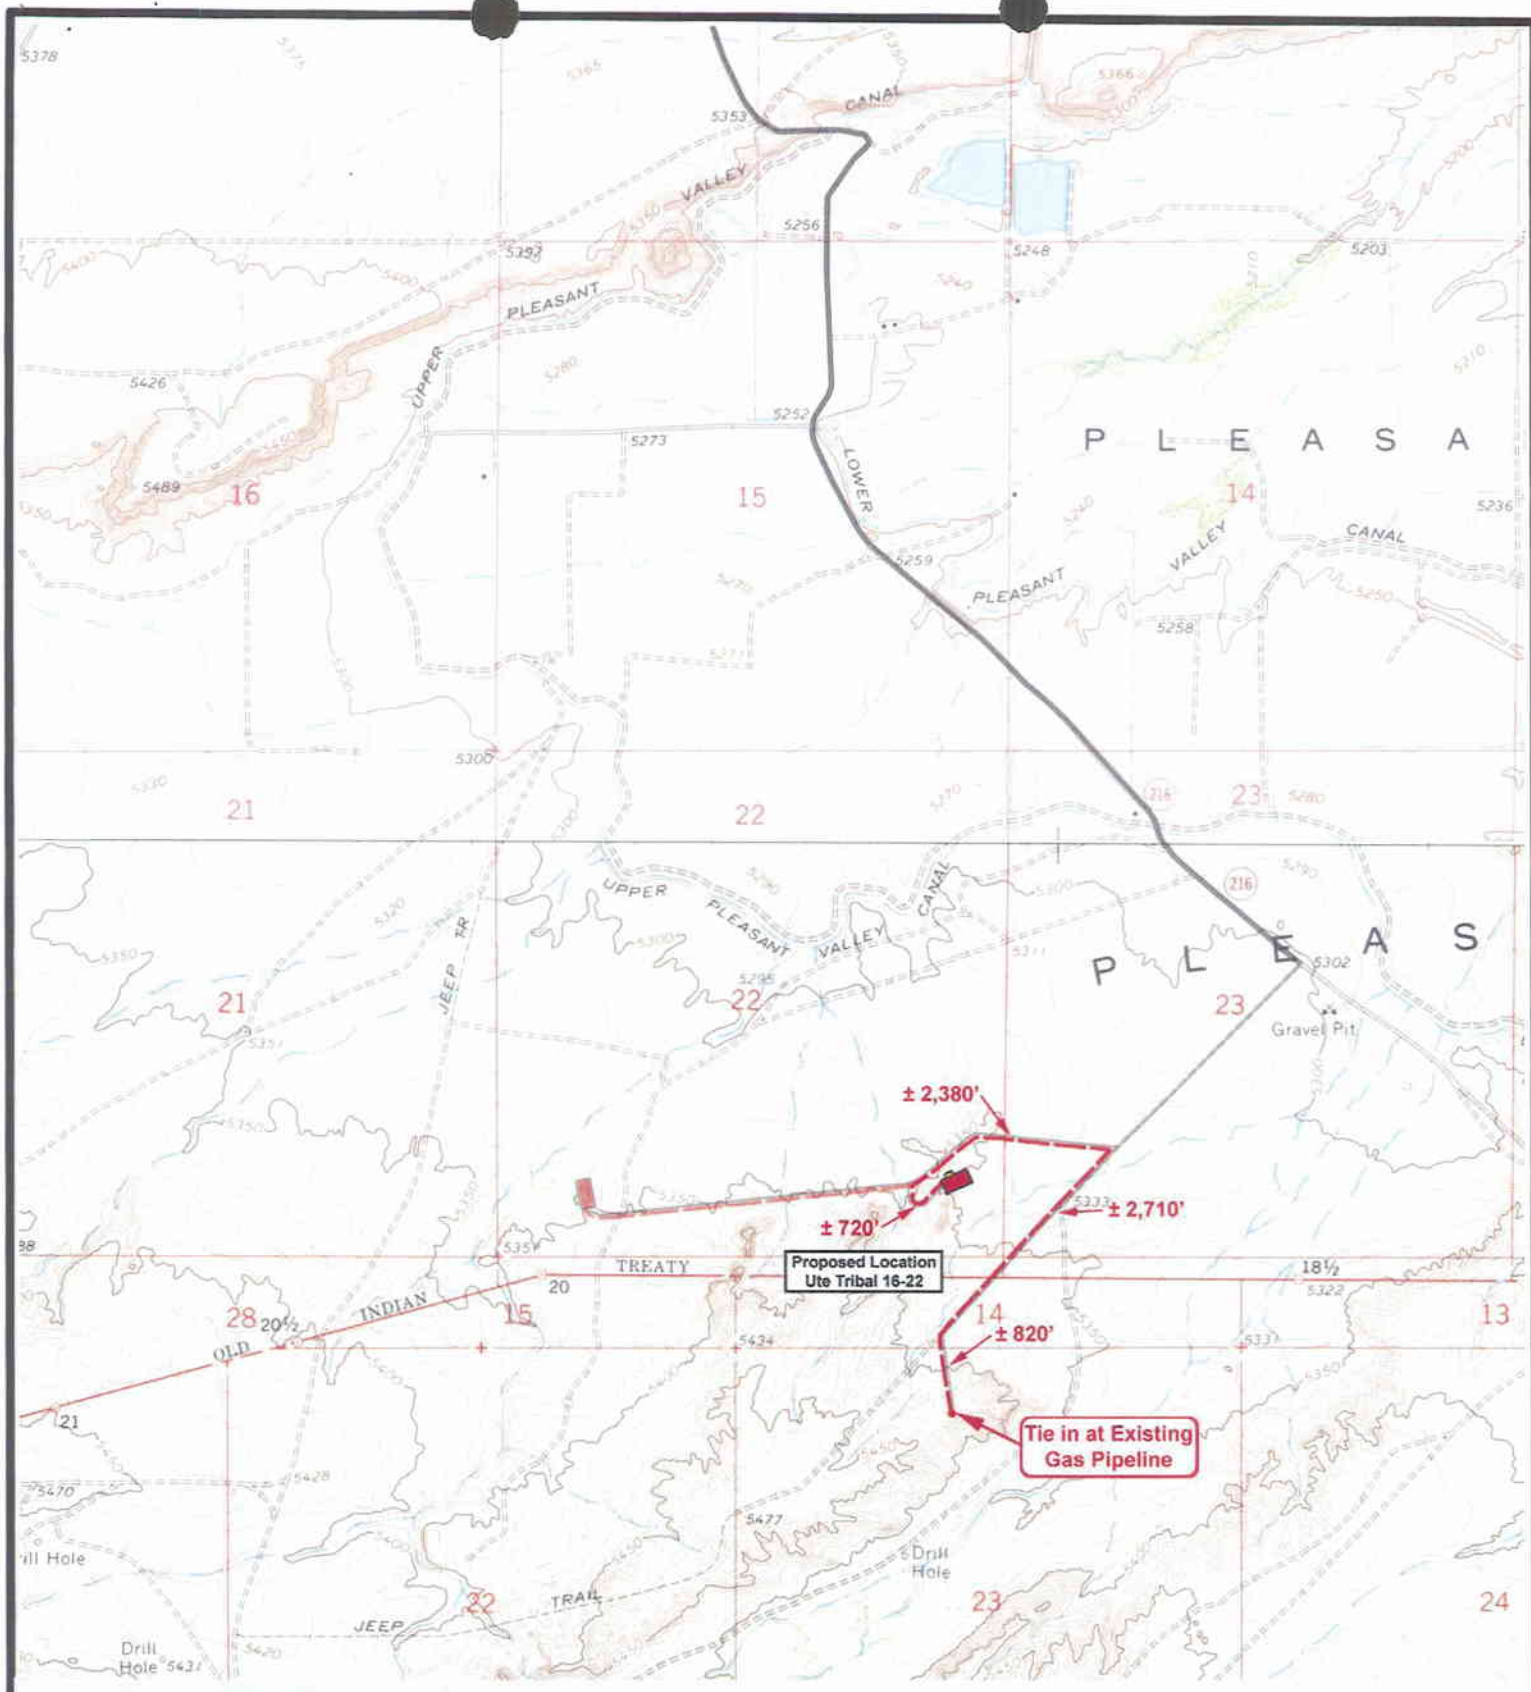

NEWFIELD
Exploration Company

Ute Tribal 16-22-4-2
SEC. 22, T4S, R2W, U.S.B.&M.



Tri-State
Land Surveying Inc.
(435) 781-2501

180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2000'

DRAWN BY: mw


DATE: 04-05-2007


Legend

— Roads
- - - Proposed Gas Line

TOPOGRAPHIC MAP

"C"

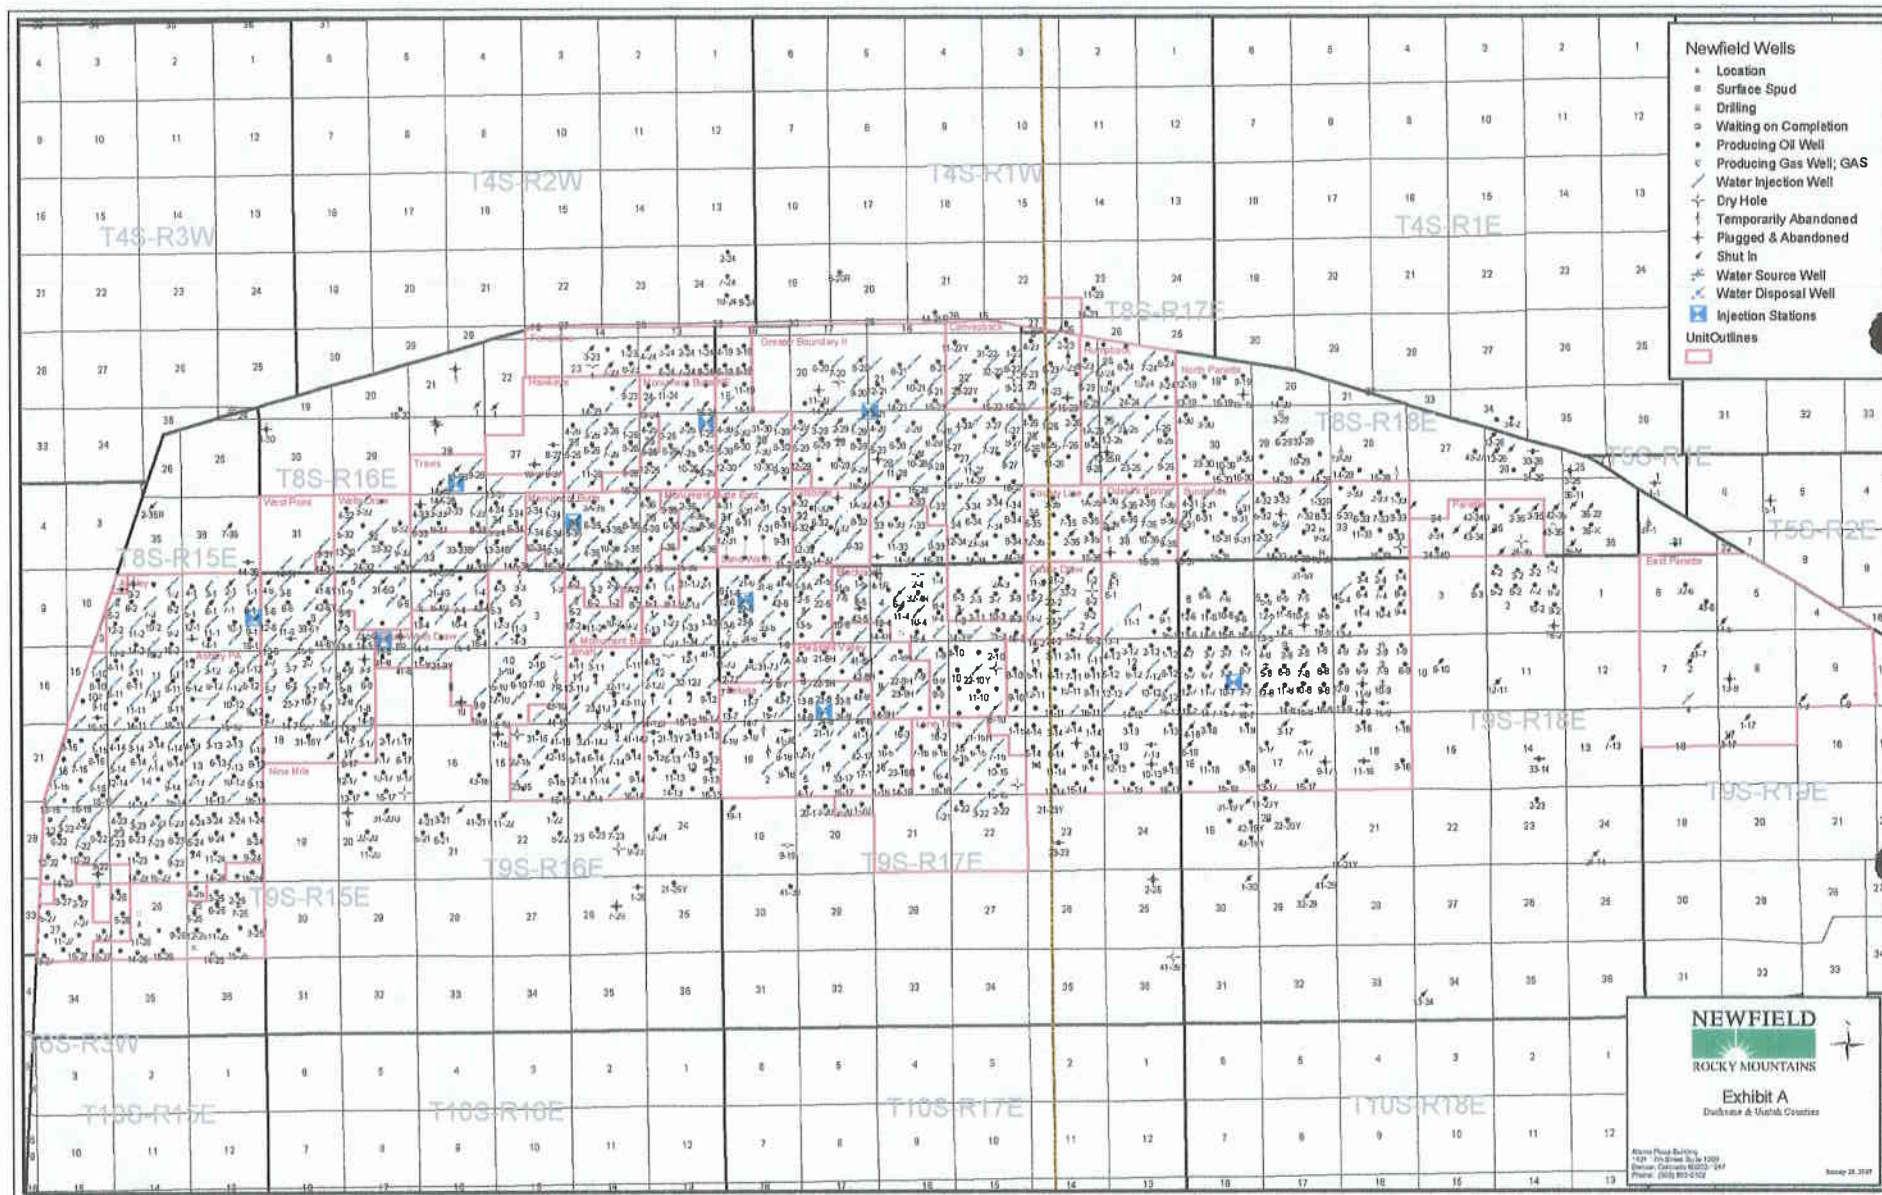

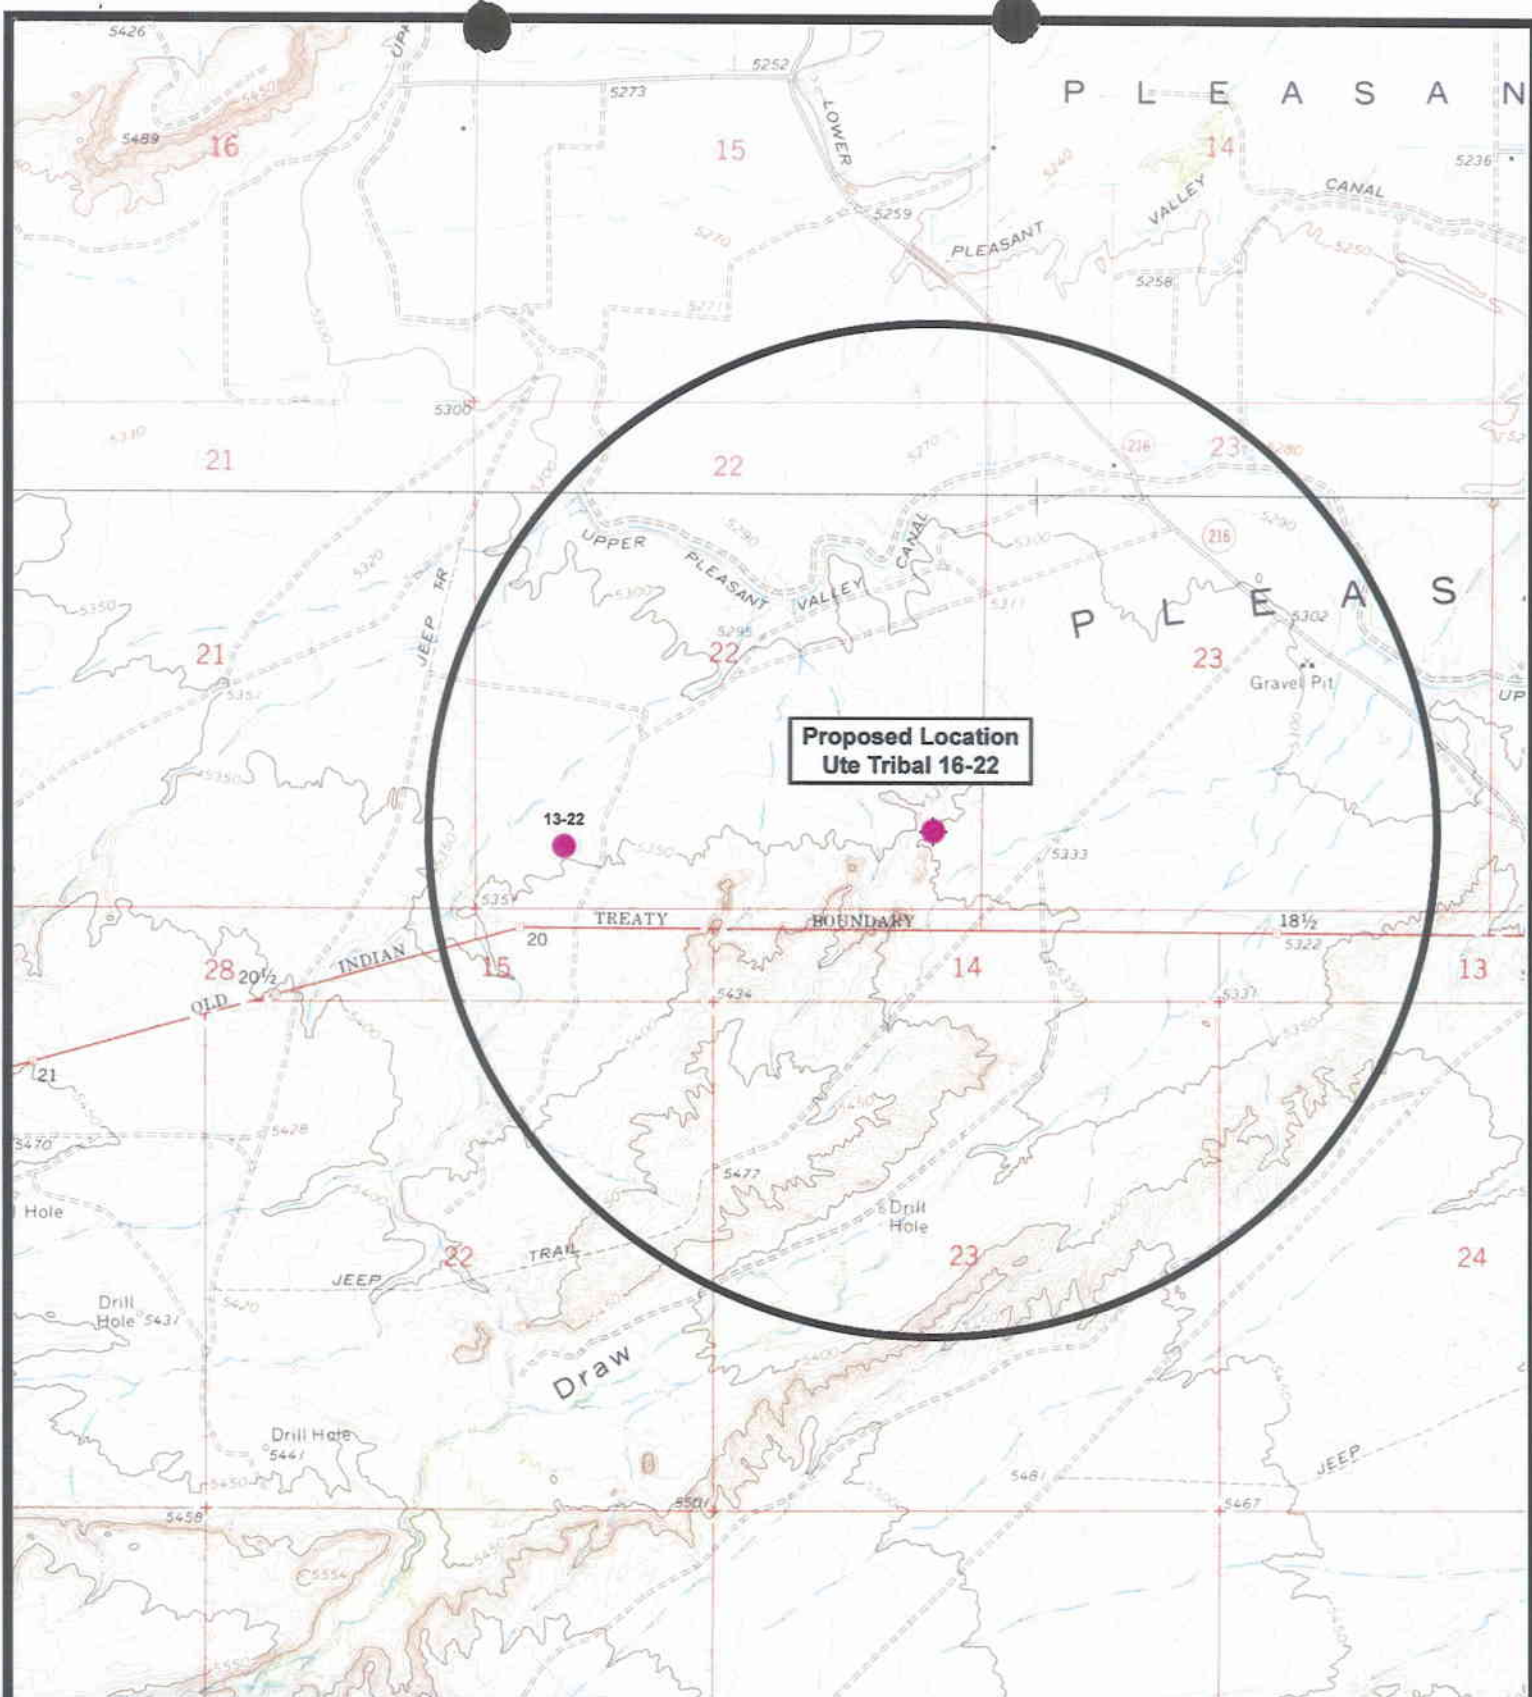

NEWFIELD
Exploration Company

Ute Tribal 16-22-4-2
SEC. 22, T4S, R2W, U.S.B.&M.



Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'
DRAWN BY: mw
DATE: 04-05-2007

Legend

- Location
- One-Mile Radius

Exhibit "B"

2-M SYSTEM

Blowout Prevention Equipment Systems

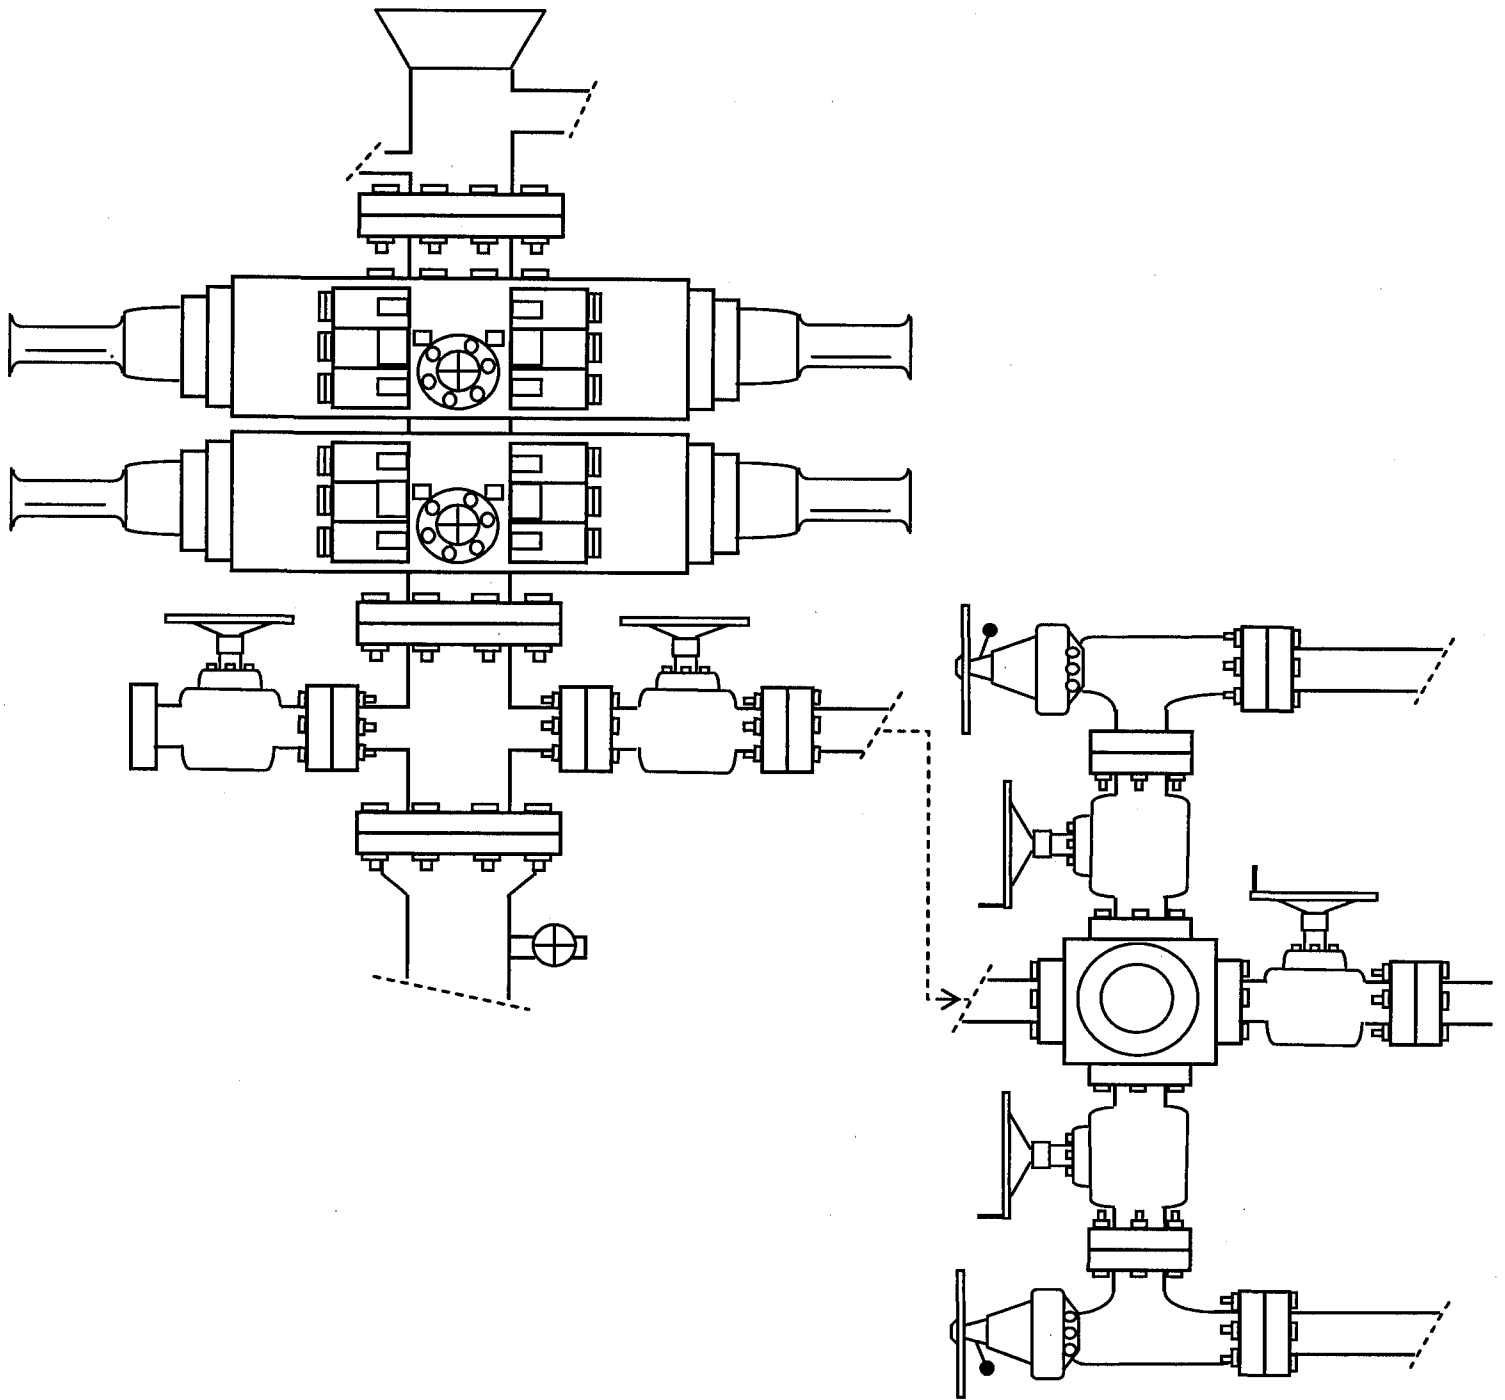


EXHIBIT C

EXHIBIT D

Ute Tribe 16-22-4-2
SESE Sec. 22, T4S, R2W

CULTURAL REPORT WAIVER

For the above referenced location; Clinton Moon, the Private Surface Owner. (Having a Surface Owner Agreement with Newfield Production Company)

Clinton Moon, representing this entity does agree to waive the request from the State of Utah and Bureau of Land Management for an Archaeological/Cultural Survey. This waiver hereby releases Newfield Production Company from this request.

Clinton Moon 3/22/07

Clinton Moon Date
Private Surface Owner

Brad Meham 3-26-07

Brad Meham Date
Newfield Production Company

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 05/03/2007

API NO. ASSIGNED: 43-013-33635

WELL NAME: UTE TRIBAL 16-22-4-2

OPERATOR: NEWFIELD PRODUCTION (N2695)

PHONE NUMBER: 435-646-3721

CONTACT: MANDIE CROZIER

PROPOSED LOCATION:

SESE 22 040S 020W

SURFACE: 0836 FSL 0582 FEL

BOTTOM: 0836 FSL 0582 FEL

COUNTY: DUCHESNE

LATITUDE: 40.11558 LONGITUDE: -110.0873

UTM SURF EASTINGS: 577782 NORTHINGS: 4440775

FIELD NAME: UNDESIGNATED (2)

INSPECT LOCATN BY: / /

Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 2 - Indian

LEASE NUMBER: EDA 20G0005609

PROPOSED FORMATION: GRRV

SURFACE OWNER: 4 - Fee

COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

☒ Plat
☒ Bond: Fed[] Ind[2] Sta[] Fee[]
(No. B002792)
☒ Potash (Y/N)
☒ Oil Shale 190-5 (B) or 190-3 or 190-13
☒ Water Permit
(No. MUNICIPAL)
☒ RDCC Review (Y/N)
(Date:)
☒ Fee Surf Agreement (Y/N)
☒ Intent to Commingle (Y/N)

LOCATION AND SITING:


___ R649-2-3.
Unit: ___
☒ R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
___ R649-3-3. Exception
___ Drilling Unit
Board Cause No: ___
Eff Date: ___
Siting: ___
___ R649-3-11. Directional Drill

COMMENTS:

Needs Permit (05-15-07)

STIPULATIONS:

1- Federal Approval
2- Spacing Strip
2- STATEMENT OF BASIS

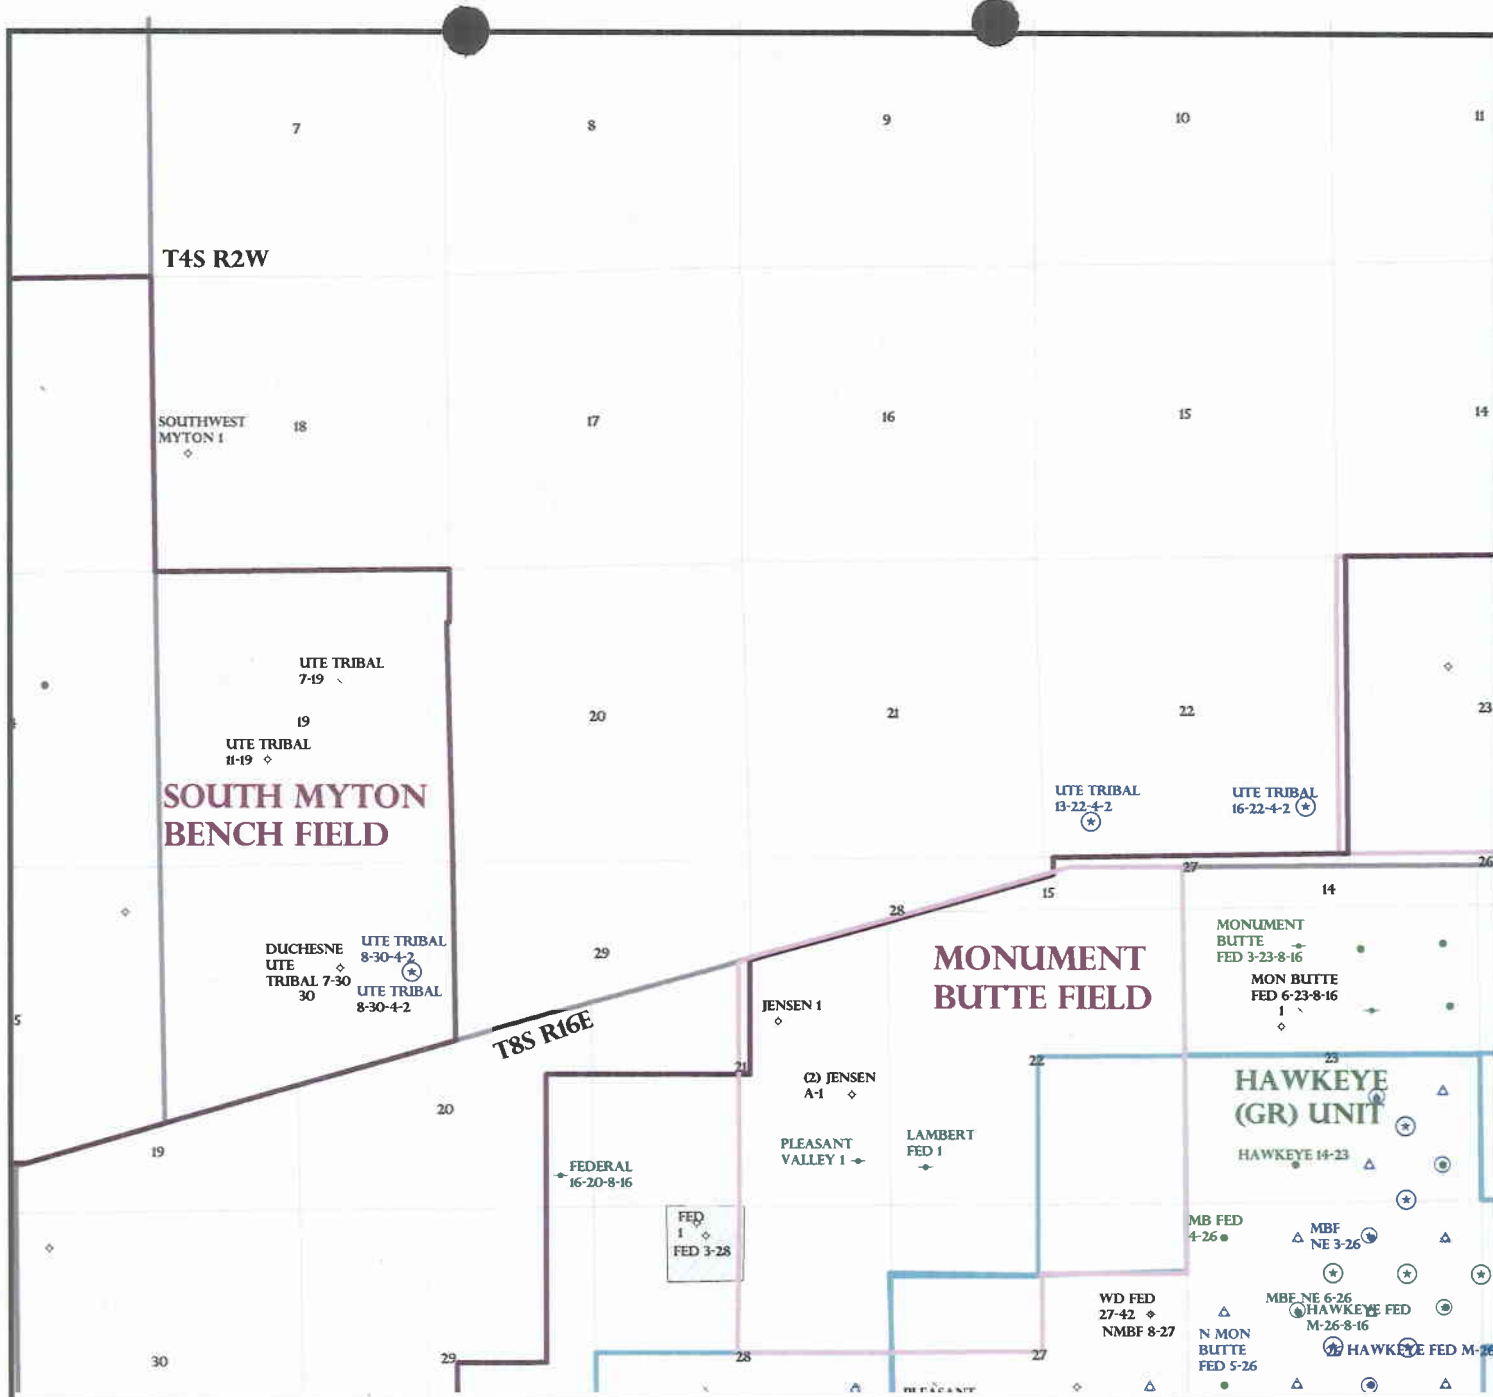

OPERATOR: NEWFIELD PROD CO (N2695)

SEC: 22 T.4S R.2W

FIELD: UNDESIGNATED (002)

COUNTY: DUCHESNE

SPACING: R649-3-2 / GENERAL SITING

Field Status


- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED

Unit Status

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

Wells Status

- GAS INJECTION
- GAS STORAGE
- LOCATION ABANDONED
- NEW LOCATION
- PLUGGED & ABANDONED
- PRODUCING GAS
- PRODUCING OIL
- SHUT-IN GAS
- SHUT-IN OIL
- TEMP. ABANDONED
- TEST WELL
- WATER INJECTION
- WATER SUPPLY
- WATER DISPOSAL
- DRILLING

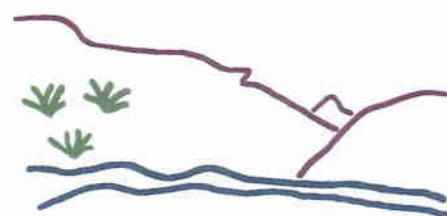

Utah Oil Gas and Mining



PREPARED BY: DIANA MASON
DATE: 8-MAY-2007

Application for Permit to Drill

Statement of Basis

Utah Division of Oil, Gas and Mining

5/16/2007

Page 1

APD No	API WellNo	Status	Well Type	Surf Ownr	CBM
408	43-013-33635-00-00		OW	P	No
Operator	NEWFIELD PRODUCTION COMPANY		Surface Owner-APD		
Well Name	UTE TRIBAL 16-22-4-2		Unit		
Field	UNDESIGNATED		Type of Work		
Location	SESE 22 4S 2W U 836 FSL 582 FEL GPS Coord (UTM) 577782E 4440775N				

Geologic Statement of Basis

The mineral rights for the proposed well are owned by the Ute Tribe. The BLM will be the agency responsible for evaluating and approving the drilling, casing and cement programs.

Brad Hill

5/16/2007

APD Evaluator

Date / Time

Surface Statement of Basis

The proposed location is approximately 8.4 road miles southwest of Myton, UT in a sub-drainage of Pleasant Valley Wash which drains into the Pariette Draw drainage of Duchesne County. Both of these draws contain perennial streams somewhat consisting of irrigation runoff and seepage. Pariette Draw runs into the Green River approximately 6 miles downstream from Ouray, Ut and about 14 miles downstream from the location. Broad flats with those in lower Pleasant Valley frequently used for agriculture characterize the area. Flats are intersected by drainages with gentle to moderate side slopes. Access is by State and County roads. Fifty eight hundred feet of new road construction across private land will be required to reach the location.

The location is primarily on a rounded ridge, which gently slopes to the north. A knoll, which will not be excavated, lies to the southwest. Surrounding terrain opens into valleys both to the south and north. A swale crosses the south-west corner of the location and will be re-routed if necessary.

The surface of the location is owned Clinton Moon. Mr. Moon was contacted by telephone on May 11, 2007 and said he would not attend the pre-site visit. A signed surface use agreement and a cultural resource survey waiver exist. The minerals are owned by the United States Government and held in trust for the Ute Indian Tribe. Charles MacDonald of the BLM represented the Ute Indian Tribe.

The location appears to be a suitable site for drilling and operating a well

Floyd Bartlett

5/15/2007

Onsite Evaluator

Date / Time

Conditions of Approval / Application for Permit to Drill

Category	Condition
Pits	A synthetic liner with a minimum thickness of 16 mils with a felt subliner shall be properly installed and maintained in the reserve pit.
Surface	Drainages adjacent to the proposed pad shall be diverted around the location.

ON-SITE PREDRILL EVALUATION

Utah Division of Oil, Gas and Mining

Operator NEWFIELD PRODUCTION COMPANY
Well Name UTE TRIBAL 16-22-4-2
API Number 43-013-33635-0 **APD No** 408 **Field/Unit** UNDESIGNATED
Location: 1/4,1/4 SESE **Sec** 22 **Tw** 4S **Rng** 2W 836 FSL 582 FEL
GPS Coord (UTM) 577788 4440773 **Surface Owner**

Participants

Floyd Bartlett (DOGM), David Allred and Kim Swasey (Newfield), Charles Macdonald (BLM).

Regional/Local Setting & Topography

The proposed location is approximately 8.4 road miles southwest of Myton, UT in a sub-drainage of Pleasant Valley Wash which drains into the Pariette Draw drainage of Duchesne County. Both of these draws contain perennial streams somewhat consisting of irrigation runoff and seepage. Pariette Draw runs into the Green River approximately 6 miles downstream from Ouray, Ut and about 14 miles downstream from the location. Broad flats with those in lower Pleasant Valley frequently used for agriculture characterize the area. Flats are intersected by drainages with gentle to moderate side slopes. Access is by State and County roads. Fifty eight hundred feet of new construction across private land will be required to reach the location.

The location is primarily on a rounded ridge, which gently slopes to the north. A knoll, which will not be excavated, lies to the southwest. Surrounding terrain opens into valleys both to the south and the north. A swale crosses the south-west corner of the location and will be re-routed if necessary.

The surface of the location is owned Clinton Moon. The minerals are owned by the United States Government and held in trust for the Ute Indian Tribe.

Surface Use Plan

Current Surface Use

Grazing

Wildlife Habitat

New Road

Miles	Well Pad	Src Const Material	Surface Formation
1.1	Width 209 Length 290	Onsite	UNTA

Ancillary Facilities N

Waste Management Plan Adequate? Y

Environmental Parameters

Affected Floodplains and/or Wetland N

Flora / Fauna

Deseret shrub type consisting of horsebrush, cheatgrass, globe mallow, mat saltbrush, shadscale, agrosis, greasewood, hordium and spring annuals.

Cattle, prairie dogs, small mammals and birds.

Soil Type and Characteristics

Moderately deep sandy clay loam. Common flat rock pavement on surface.

Erosion Issues N

Sedimentation Issues N

Site Stability Issues N

Drainage Diversion Required Y

Around the south-west corner if needed following construction of pad.

Berm Required? N

Erosion Sedimentation Control Required? N

Paleo Survey Run? N

Paleo Potential Observed? N

Cultural Survey Run? N

Cultural Resources?

Reserve Pit

Site-Specific Factors

Site Ranking

Distance to Groundwater (feet)	>200	0
Distance to Surface Water (feet)	>1000	0
Dist. Nearest Municipal Well (ft)	>5280	0
Distance to Other Wells (feet)	300 to 1320	10
Native Soil Type	Mod permeability	10
Fluid Type	Fresh Water	5
Drill Cuttings	Normal Rock	0
Annual Precipitation (inches)	<10	0
Affected Populations	<10	0
Presence Nearby Utility Conduits	Not Present	0

Final Score 25 1 **Sensitivity Level**

Characteristics / Requirements

40' x 80' x 8' deep located in an area of cut on the northwest side of the location. Liner is required. Newfield commonly uses a 16 mil liner.

Closed Loop Mud Required? N

Liner Required? Y

Liner Thickness 16

Pit Underlayment Required? Y

Other Observations / Comments

Floyd Bartlett
Evaluator

5/15/2007
Date / Time



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

May 16, 2007

Newfield Production Company
Rt. #3, Box 3630
Myton, UT 84052

Re: Ute Tribal 16-22-4-2 Well, 836' FSL, 582' FEL, SE SE, Sec. 22, T. 4 South,
R. 2 West, Duchesne County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-013-33635.

Sincerely,

A handwritten signature in black ink, appearing to read "Gil Hunt".

Gil Hunt
Associate Director

pab
Enclosures

cc: Duchesne County Assessor
Bureau of Land Management, Vernal Office

Operator: Newfield Production Company
Well Name & Number Ute Tribal 16-22-4-2
API Number: 43-013-33635
Lease: EDA-2OG0005609

Location: SE SE Sec. 22 T. 4 South R. 2 West

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division with 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.
5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)
6. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

From: "Mandie Crozier" <mcrozier@newfield.com>
To: "Diana Mason" <dianawhitney@utah.gov>
Date: 6/8/2007 10:14 AM
Subject: RE: Newfield Tribal APD's
Attachments: 8-30-4-2_001.tif; 11-30-4-2_001.tif; 15-19-4-2_001.tif; 3-30-4-2_001.tif; 8-25-4-1_001.tif; 6-25-4-1_001.tif; 6-30-4-1_001.tif; 13-22-4-2_001.tif; 16-22-4-2_001.tif; 12-29-4-1_001.tif; 16-29-4-1_001.tif; 13-19-4-1_001.tif; 6-22-4-1_001.tif; 8-21-4-1_001.tif; 10-21-4-1_001.tif

Here are 15 of the 17 that have previously been submitted. We had to amend the 10 point drilling plan on all of them and then I had to add some narrative in the 13 point surface use plan for the proposed pipelines. Let me know if you have any questions or need anything else.

Mandie Crozier
Newfield Production
(435)646-4825

-----Original Message-----

From: Diana Mason [mailto:dianawhitney@utah.gov]
Sent: Friday, June 08, 2007 8:32 AM
To: Mandie Crozier
Subject: RE: Newfield Tribal APD's

Yes

>>> "Mandie Crozier" <mcrozier@newfield.com> 6/8/2007 8:03 AM >>>
Can I just scan them in and e-mail them to you?

Mandie Crozier
Newfield Production
(435)646-4825

-----Original Message-----

From: Diana Mason [mailto:dianawhitney@utah.gov]
Sent: Friday, June 08, 2007 7:45 AM
To: Mandie Crozier
Subject: Re: Newfield Tribal APD's

Yes, will you send them into us to. Thanks

>>> "Mandie Crozier" <mcrozier@newfield.com> 6/7/2007 1:40 PM >>>
I have had to amend the 10 point plan for all of the Tribal Permits.
The BLM has requested that we have a more detailed casing and cement design. I was not sure if you guys needed a copy of those amendment or not. All of the depths have stayed the same.

Mandie Crozier

Newfield Production

Phone: (435)646-4825

Fax: (435) 646-3031

43-013-3363

Form 3160-3
(September 2001)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER


FORM APPROVED
OMB No. 1004-0136
Expires January 31, 2004

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER 1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone 2. Name of Operator Newfield Production Company 3a. Address Route #3 Box 3630, Myton UT 84052 3b. Phone No. (include area code) (435) 646-3721 4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface SE/SE 836' FSL 582' FEL At proposed prod. zone		5. Lease Serial No. 20G0005609 6. If Indian, Allottee or Tribe Name Ute 7. If Unit or CA Agreement, Name and No. N/A 8. Lease Name and Well No. Ute Tribal 16-22-4-2 9. API Well No. 10. Field and Pool, or Exploratory Monument Butte 11. Sec., T., R., M., or Blk. and Survey or Area SE/SE Sec. 22, T4S R2W 12. County or Parish Duchesne 13. State UT
14. Distance in miles and direction from nearest town or post office* Approximately 8.4 miles southwest of Myton, Utah 15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) Approx. 582' Fee, NA' ft/unit NA 16. No. of Acres in lease NA 17. Spacing Unit dedicated to this well 40 Acres 18. Distance from proposed* location to nearest well, drilling, completed, applied for, on this lease, ft. NA 19. Proposed Depth 6800' 20. BLM/BIA Bond No. on file B002782	21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5354' GL 22. Approximate date work will start* 3rd Quarter 2007 23. Estimated duration <small>Approximately seven (7) days from spud to rig release.</small>	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be required by the authorized officer. |
|--|---|

25. Signature  Title Regulatory Specialist	Name (Printed/Typed) Mandie Crozier Date 5/1/07
Approved by (Signature) Title	Name (Printed/Typed) Office

Application approval does not warrant or certify the the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

NEWFIELD PRODUCTION COMPANY
 UTE TRIBAL #16-22-4-2
 SE/SE SECTION 22, T4S, R2W
 DUCHESNE COUNTY, UTAH

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. GEOLOGIC SURFACE FORMATION:

Uinta formation of Upper Eocene Age

2. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:

Uinta	0' – 2,950'
Green River	2,950'
TD	6,800'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:

Green River Formation (Oil) 2,950' – 6,800'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO ₃) (mg/l)
Dissolved Bicarbonate (NaHCO ₃) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO ₄) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

Ten Point Well Program &
Thirteen Point Well Program
Page 2 of 12

4. **PROPOSED CASING PROGRAM**

a. **Casing Design: Ute Tribal 16-22-4-2**

Casing Type	Depth (ft)	Length (ft)	Weight (lb/ft)	Grade	Joint Type	Surface Area (sq ft)	Volume (cu ft)	Weight (lb)
Surface casing 8-5/8"	0'	300'	24.0	J-55	STC	2,950	1,370	244,000
						17.53	14.35	33.89
Prod casing 5-1/2"	0'	6,800'	15.5	J-55	LTC	4,810	4,040	217,000
						2.22	1.87	2.06

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg
 Pore pressure at surface casing shoe = 8.33 ppg
 Pore pressure at prod casing shoe = 8.33 ppg
 Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. **Cementing Design: Ute Tribal 16-22-4-2**

Casing Type	Depth (ft)	Cement Type	Volume (cu ft)	Weight (lb)	Strength (psi)	Time (hr)
Surface casing	300'	Class G w/ 2% CaCl	138	161	30%	15.8
						1.17
Prod casing Lead	4,800'	Prem Lite II w/ 10% gel + 3% KCl	332	1081	30%	11.0
						3.26
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363	451	30%	14.3
						1.24

*Actual volume pumped will be 15% over the caliper log

- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
- Compressive strength of tail cement: 2500 psi @ 24 hours

Waiting On Cement: A minimum of four (4) hours shall elapse prior to attempting any pressure testing of the BOP equipment which would subject the surface casing cement to pressure, and a minimum of six (6) hours shall elapse before drilling out of the wiper plug, cement, or shoe is begun. WOC time shall be recorded in the Driller's Log. Compressive Strength shall be a minimum of 500 psi prior to drilling out.

The Vernal BLM Office shall be notified, with sufficient lead time, in order to have a BLM representative on location while running all casing strings and cementing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if

Ten Point Well Program &
Thirteen Point Well Program
Page 3 of 12

the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

The production casing cementing program shall be conducted as approved to protect and/or isolate all usable water zones, potentially productive zones, lost circulation zones, abnormally pressured zones, and any prospectively valuable deposits of minerals.

As a minimum, usable water zones shall be isolated and/or protected by having a cement top for the production casing at least 200 feet above the base of the usable water. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

Top plugs shall be used to reduce contamination of cement by displacement fluid. A bottom plug or other acceptable technique, such as a suitable preflush fluid, inner string cement method, etc., shall be utilized to help isolate the cement from contamination by the mud being displaced ahead of the cement slurry.

All casing strings below the conductor shall be pressure tested to 0.22 psi per foot of casing string length or to 1500 psi, whichever is greater, but not to exceed 70% of the minimum internal yield. If pressure declines more than 10% in 30 minutes, corrective action shall be taken.

A Form 3160-5, "Sundry Notices and Reports on Wells" shall be filed with the Vernal Office Manager within 30 days after the work is completed. This report must include the following information:

Setting of each string of casing showing the size, grade, weight of casing set, depth, amounts and type of cement used, whether cement circulated or the top of the cement behind the casing, depth of the cementing tools used, casing test method and results, and the date of the work done. Spud date will be shown on the first reports submitted.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The Company's Class 2M minimum specifications for pressure control equipment for a standard Monument Butte development well are as follows:

A 2000 psi WP hydraulic BOP stack consisting of two ram preventers (double or two singles) and either an annular preventer or a rotating head. If no annular preventer is used, ram blocks will be changed to match the outside diameter of casing and the stack will be retested prior to running any casing string.

Connections - All components on the stack and choke and kill lines shall have either flanged, studded, clamp hub or equivalent proprietary connections except control line outlets and pressure gauges.

Choke Manifold - The minimum equipment requirements are shown in Exhibit C. The choke manifold shall be located at least 5 feet from the BOP stack, outside the substructure.

Pressure Monitoring - A means of monitoring the inlet pressure of the choke manifold shall be provided. The capability to isolate this outlet shall be provided.

Drillstring Control Devices - An upper and lower kelly valve, drillstring safety valve including correct closing handle, and an inside BOP shall be provided. The safety valve and inside BOP shall have connections or crossovers to fit all tubulars with OD to allow adequate clearance for running in the hole. All drillstring valves shall be rated to the required BOP WP.

Ten Point Well Program &
Thirteen Point Well Program
Page 4 of 12

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a 2M system, and individual components shall be operable as designed.

Function test of the BOP equipment shall be made daily. All required BOP tests and/or drills shall be recorded in the Driller's report.

Chart recorders will be used for all pressure tests. Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to BLM representatives upon request.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ± 3200 feet will be drilled with either fresh water or an air/mist system, depending on the drilling contractor's preference. From about 3200 feet, or in the case of the air/mist system when hole conditions dictate, to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite.

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TTW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

- a. **Logging Program:**
(the log types run may change at the discretion of the geologist)

FDC/CNL/GR/DLL: TD - 3,200'

CBL: A cement bond log will be run from TD to the cement top of the production casing.
A field copy will be submitted to the Vernal BLM Office.

- b. **Cores:** As deemed necessary.

- c. **Drill Stem Tests:** No DSTs are planned in the Green River.

Drill stem tests, if they are run, will adhere to the following requirements: Initial opening of the drill stem test tools shall be restricted to daylight hours unless specific approval to start

Ten Point Well Program &
Thirteen Point Well Program
Page 5 of 12

during other hours is obtained from the Authorized Officer (AO). However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vapor-proof for safe operations). Packers can be released but tripping shall not begin before daylight, unless prior approval is obtained from the AO. Closed chamber DSTs may be performed day or night.

Some means of reverse circulation shall be provided in case of flow to the surface showing evidence of hydrocarbons.

Separation equipment required for the anticipated recovery shall be properly installed before a test starts.

If a DST is performed, all engines within 100 feet of the wellbore that are required to be operational during the test shall have spark arresters or water-cooled exhausts.

Please refer to the Monument Butte Field Standard Operation Procedure (SOP).

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

a. **Drilling Activity**

Anticipated Commencement Date:	Upon approval of the site specific APD.
Drilling Days:	Approximately 7 days.
Completion Days:	Approximately 10 - 14 days.

b. **Notification of Operations**

The Vernal BLM office will be notified at least 24 hours prior to the commencement of spudding the well (to be followed with a Sundry Notice, Form 3160-5), of initiating pressure tests of the blowout preventer and related equipment, and running casing and cementing of all casing strings. Notification will be made during regular work hours (7:45 a.m.-4:30 p.m., Monday - Friday except holidays).

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the appropriate regulations, Onshore Orders, or BLM policy.

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in suspended status without prior approval from the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given to the BLM before resumption of operations.

Daily drilling and completion reports shall be submitted to the Vernal BLM Office on a weekly basis.

Ten Point Well Program &
Thirteen Point Well Program
Page 6 of 12

Whether the well is completed as a dry hole or a producer, the "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. One copy of all logs, core descriptions, core analyses, well test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the Authorized Officer (AO).

A completion rig will be used for completion operations after the wells are stimulated to run the production tubing. All conditions of this approved plan will be applicable during all operations conducted with the completion rig.

Operator shall report production data to the MMS pursuant to 30 CFR 216.5 using form MMS/3160. In accordance with Onshore Oil and Gas Order No. 1, a well will be reported on form 3160-6, "Monthly Report of Operations," starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report will be filed with the Vernal BLM Office.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated, or the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever occurs first; and for gas wells, as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated, or the date on which gas is measured through permanent metering facilities, whichever occurs first.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by written communication not later than 5 days following the date when the well is placed on production.

Pursuant to Onshore Order No. 7, with the approval of the AO, produced water may be temporarily disposed of into unlined pits for a period of up to 90 days. During this period, an application for approval of the permanent disposal method must be submitted to the AO.

Pursuant to NTL-4A, lessees or operators are authorized to vent/flare gas during the initial well evaluation tests, not to exceed 30 days or the production of 50 MMCF of gas, whichever occurs first. An application must be filed with the AO and approval received for any venting/flaring of gas beyond the initial 30 days or authorized test period.

A schematic facilities diagram, as required by 43 CFR 3162.7-5(b.9.d), shall be submitted to the Vernal BLM Office within 60 days of installation or first production, whichever occurs first. All site security regulations, as specified in Onshore Oil & Gas Order No. 3, shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5(b.4).

Well abandonment operations shall not be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment", Form 3160-5, will be filed with the Authorized Officer within 30 days following completion of the well for abandonment. This report will indicate placement of the plugs and current status of the surface restoration. Final Abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO, or the appropriate surface managing agency.

**Ten Point Well Program &
Thirteen Point Well Program
Page 7 of 12**

Pursuant to Onshore Oil and Gas Order No. 1, lessees and operators have the responsibility to see that their exploration, development, production, and construction operations are conducted in a manner which conforms with applicable Federal laws and regulations and with the State and local laws, to the extent to which they are applicable, to operations on Federal or Indian lands.

Ten Point Well Program &
Thirteen Point Well Program
Page 8 of 12

NEWFIELD PRODUCTION COMPANY
UTE TRIBAL #16-22-4-2
SE/SE SECTION 22, T4S, R2W
DUCHESNE COUNTY, UTAH

THIRTEEN POINT SURFACE PROGRAM

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site Ute Tribal 16-22-4-2 located in the SE¼ SE¼ Section 22, T4S, R2W, S.L.B. & M., Duchesne County, Utah:

Proceed in a southwesterly direction out of Myton, Utah along Highway 40 approximately 1.9 miles to the junction of this highway and Utah State Highway 53; proceed southwesterly along Utah State Highway 53 approximately 1.7 miles to its junction with an existing road to the southeast; proceed southeasterly approximately 3.7 miles to its junction with the beginning of an existing two track road to be upgraded; proceed southwesterly approximately 2,700' to its junction with the beginning of the proposed access road; continue in a southwesterly direction along the proposed access road approximately 2,380'; turn in a southerly direction and proceed along the proposed access road approximately another 720' to the propose well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

Approximately 3,100' of access road is proposed. See attached Topographic Map "B".

The proposed access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%.

There will be no culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

Ten Point Well Program &
Thirteen Point Well Program
Page 9 of 12

Refer to EXHIBIT B.

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck for drilling purposes from the following water sources:

Johnson Water District
Water Right: 43-10136

Neil Moon Pond
Water Right: 43-11787

Maurice Harvey Pond
Water Right: 47-1358

Newfield Collector Well
Water Right: 41-3530 (A30414DV, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Ten Point Well Program &
Thirteen Point Well Program
Page 10 of 12

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E) or at State of Utah approved surface disposal facilities.

8. **ANCILLARY FACILITIES:**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT:**

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

Ten Point Well Program &
Thirteen Point Well Program
Page 11 of 12

a) **Producing Location**

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

b) **Dry Hole Abandoned Location**

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP:** Clinton Moon, Duchesne, Utah. See attached Easement, Right-of-Way and Surface Use Agreement.

12. **OTHER ADDITIONAL INFORMATION:**

Newfield Production Company requests from the Bureau of Land Management a 820' ROW be granted in Lease UTU-74868 and a 800' ROW be granted in Lease UTU-85638 to allow for construction of the proposed surface gas lines. It is proposed that the ROW will temporarily be 50' wide to allow for construction of a 6" gas gathering line, and a 3" poly fuel gas line, with a permanent width of 30' upon completion of the proposed gas lines. The construction phase of the proposed gas lines will last approximately (5) days. Both lines will tie in to the existing pipeline infrastructure. Refer to Topographic Map "C."

The Easement ROW from John Kaptah for construction of the proposed gas pipeline in Sec. 23, T4S R1W is attached.

- a) Newfield Production Company is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, Newfield is to immediately stop work that might further disturb such materials and contact the Authorized Officer.
- b) Newfield Production will control noxious weeds along rights-of-way for roads, pipelines, well sites or other applicable facilities. On State administered land it is required that a Pesticide Use Proposal shall be submitted and given approval prior to the application of herbicides or other possible hazardous chemicals.
- c) Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on State Lands after the conclusion of drilling operations or at any other time without State authorization. However, if State authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

The Archaeological Report Waiver for this location is attached.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made

Ten Point Well Program &
Thirteen Point Well Program
Page 12 of 12

with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the Ute Tribal 16-22-4-2, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the Ute Tribal 16-22-4-2 Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

The State office as well as the Ute Tribe Energy and Mineral Department shall be notified upon site completion prior to moving on the drilling rig.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative

Name: Kim Kettle
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification

Please be advised that Newfield Production Company is considered to be the operator of well #16-22-4-2, SE/SE Section 22, T4S, R2W, Duchesne County, Utah and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by US Specialty Insurance #B002792.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.


Date 5/1/07


Mandie Crozier
Regulatory Specialist
Newfield Production Company


T4S, R2W, U.S.B.&M.

NEWFIELD PRODUCTION COMPANY

WELL LOCATION, UTE TRIBAL 16-22-4-2,
LOCATED AS SHOWN IN THE SE 1/4 SE
1/4 OF SECTION 22, T4S, R2W, U.S.B.&M.
DUCESNE COUNTY, UTAH.

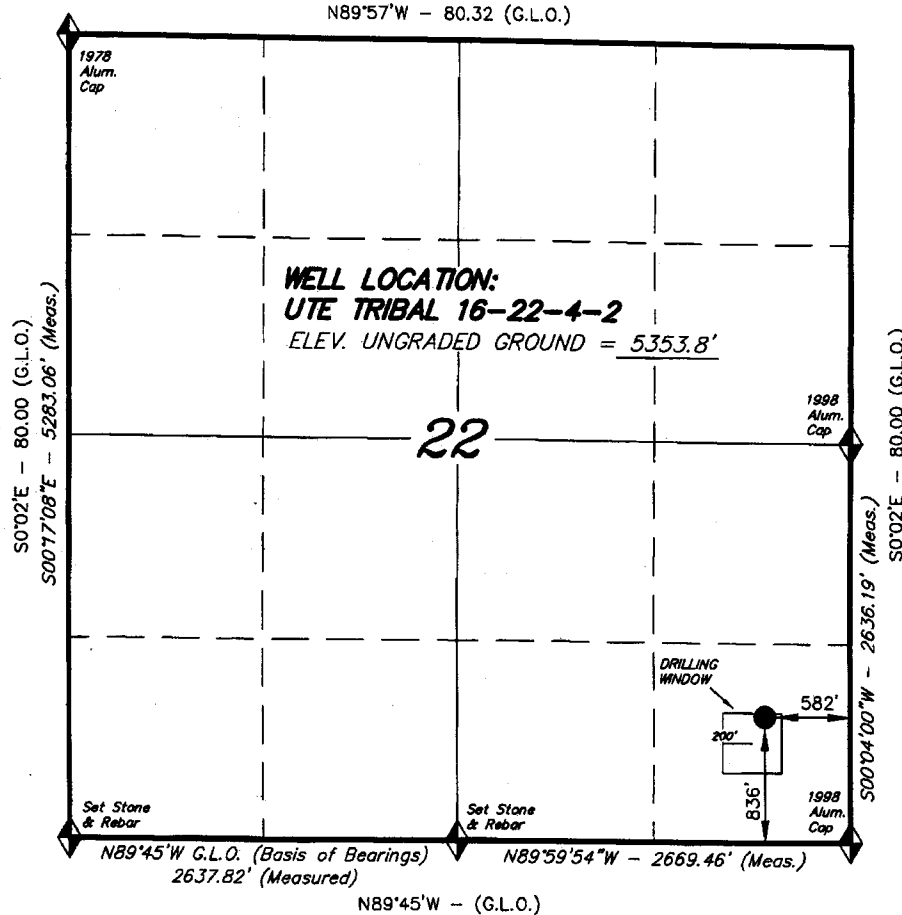

THIS IS TO CERTIFY THAT THE ABOVE PERT WAS
PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS
MADE BY ME OR UNDER MY SUPERVISION AND THAT
THE SAME ARE TRUE AND CORRECT TO THE BEST OF
MY KNOWLEDGE AND BELIEF. No. 189377

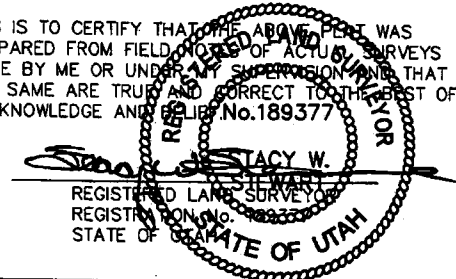

◆ = SECTION CORNERS LOCATED
BASIS OF ELEV;
U.S.G.S. 7-1/2 min QUAD (MYTON SE)

UTE TRIBAL 16-22-4-2
(Surface Location) NAD 83
LATITUDE = 40° 06' 55.89"
LONGITUDE = 110° 05' 16.90"


TRI STATE LAND SURVEYING & CONSULTING
180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501

DATE SURVEYED: 03-16-07	SURVEYED BY: C.M.
DATE DRAWN: 04-04-07	DRAWN BY: T.C.J.
REVISED:	SCALE: 1" = 1000'

NEWFIELD PRODUCTION COMPANY

UTE TRIBAL 16-22-4-2

Section 22, T4S, R2W, U.S.B.&M.

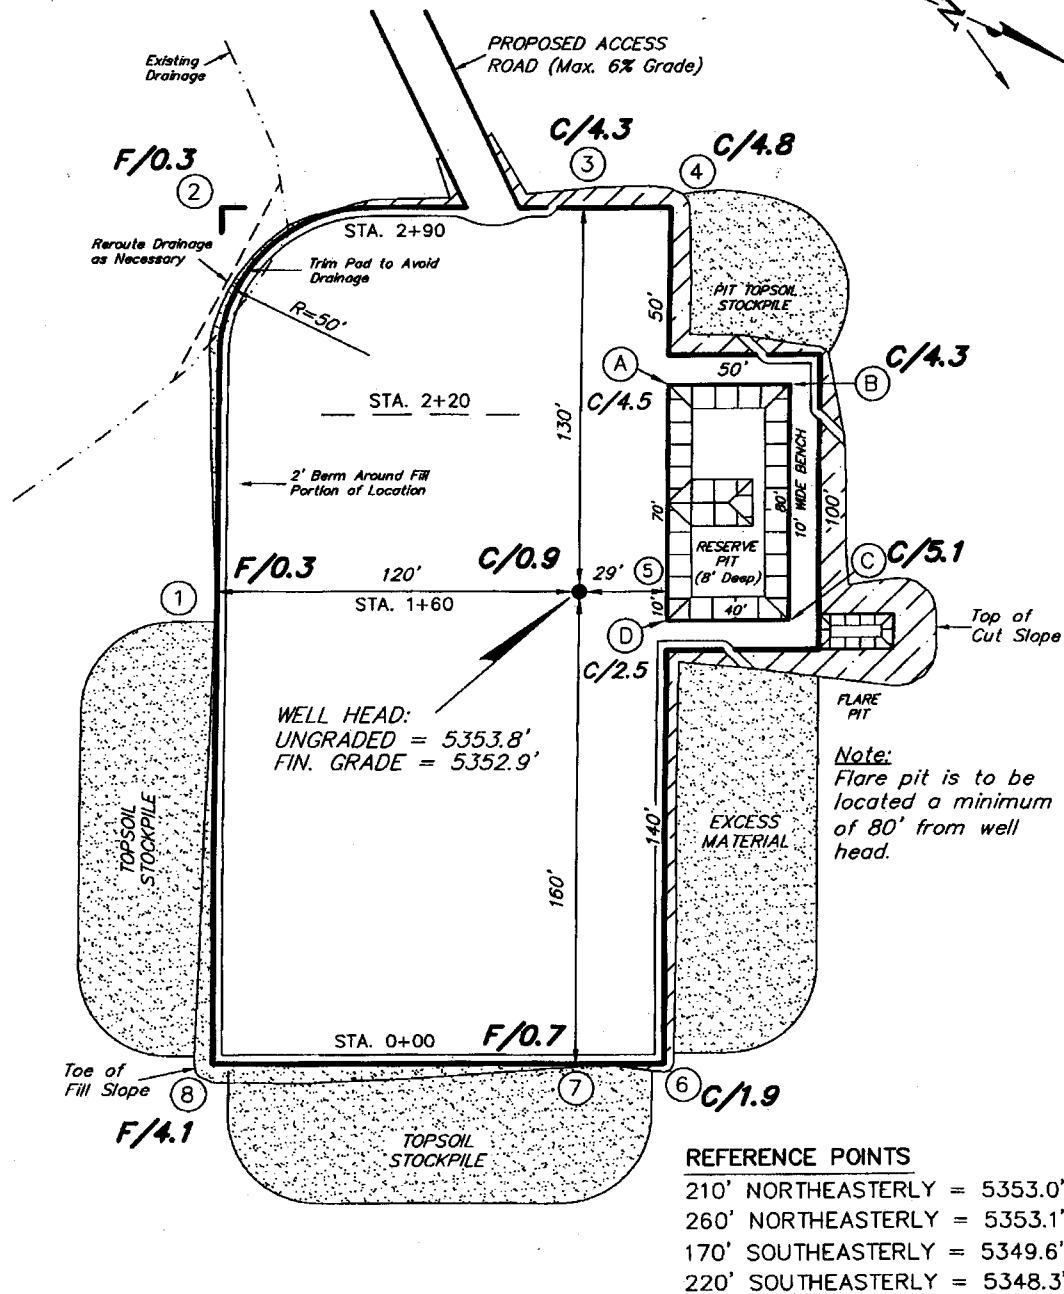

REFERENCE POINTS

210' NORTHEASTERLY = 5353.0'

260' NORTHEASTERLY = 5353.1'

170' SOUTHEASTERLY = 5349.6'

220' SOUTHEASTERLY = 5348.3'

SURVEYED BY: C.M.

SCALE: $1'' = 50'$

DRAWN BY: T.C.J.

DATE: 04-04-07





Tri State

Land Surveying, Inc.

150 NORTH VERNAL AVE. VERNAL, UTAH 84078

(435) 781-2501

NE, FIELD PRODUCTION COMPANY
CROSS SECTIONS
UTE TRIBAL 16-22-4-2

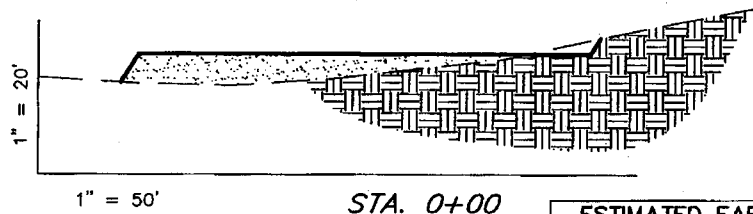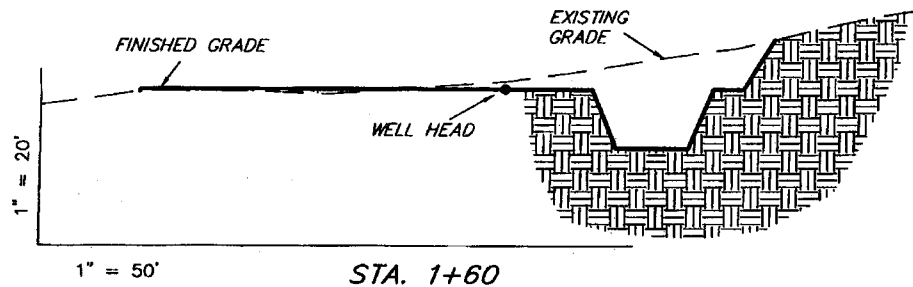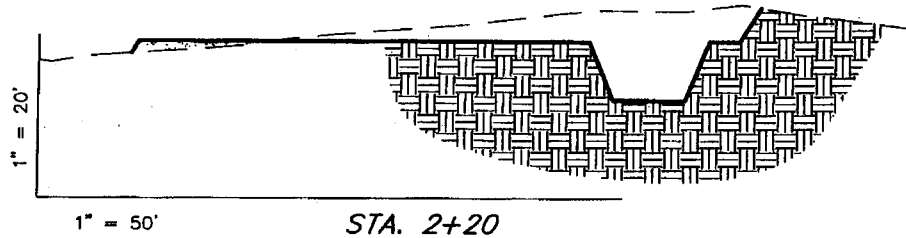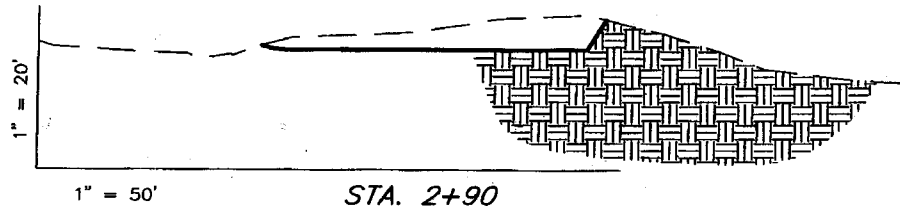

NOTE:
UNLESS OTHERWISE NOTED
ALL CUT/FILL SLOPES ARE
AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES
 (No Shrink or swell adjustments have been used)
 (Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	1,930	1,930	Topsoil is not included in Pad Cut	0
PIT	640	0		640
TOTALS	2,570	1,930	980	640

SURVEYED BY: C.M.


SCALE: 1" = 50'

DRAWN BY: T.C.J.

DATE: 04-04-07

Tri State (435) 781-2501
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD PRODUCTION COMPANY **TYPICAL RIG LAYOUT** **UTE TRIBAL 16-22-4-2**

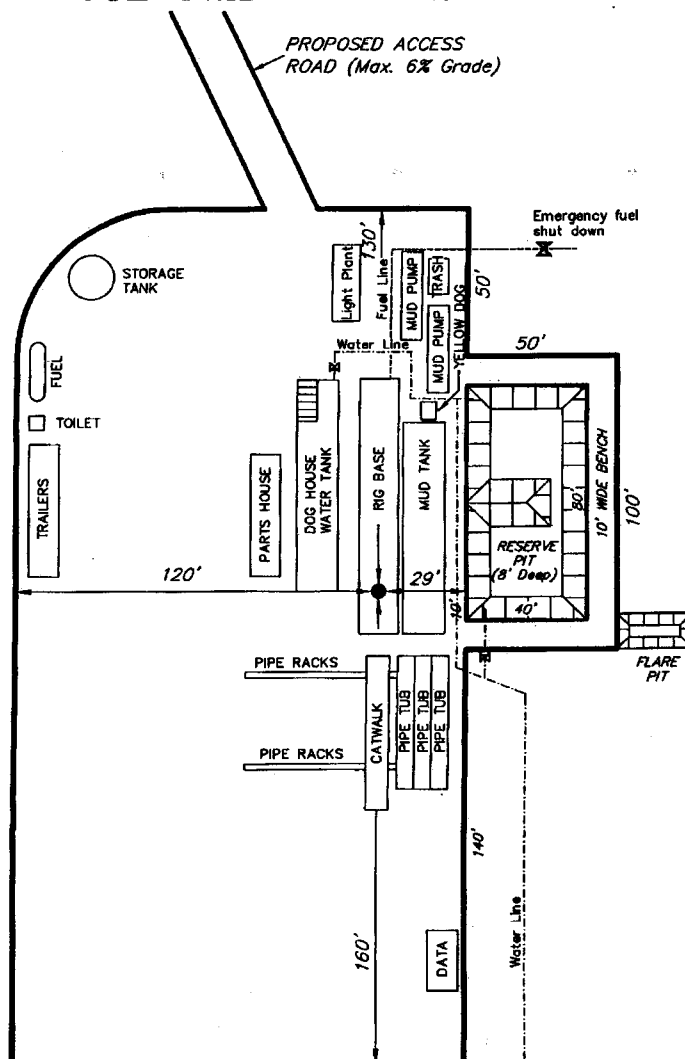


SURVEYED BY: C.M.


SCALE: 1" = 50'


DRAWN BY: T.C.J.


DATE: 04-04-07


Tri State
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078
 (435) 781-2501

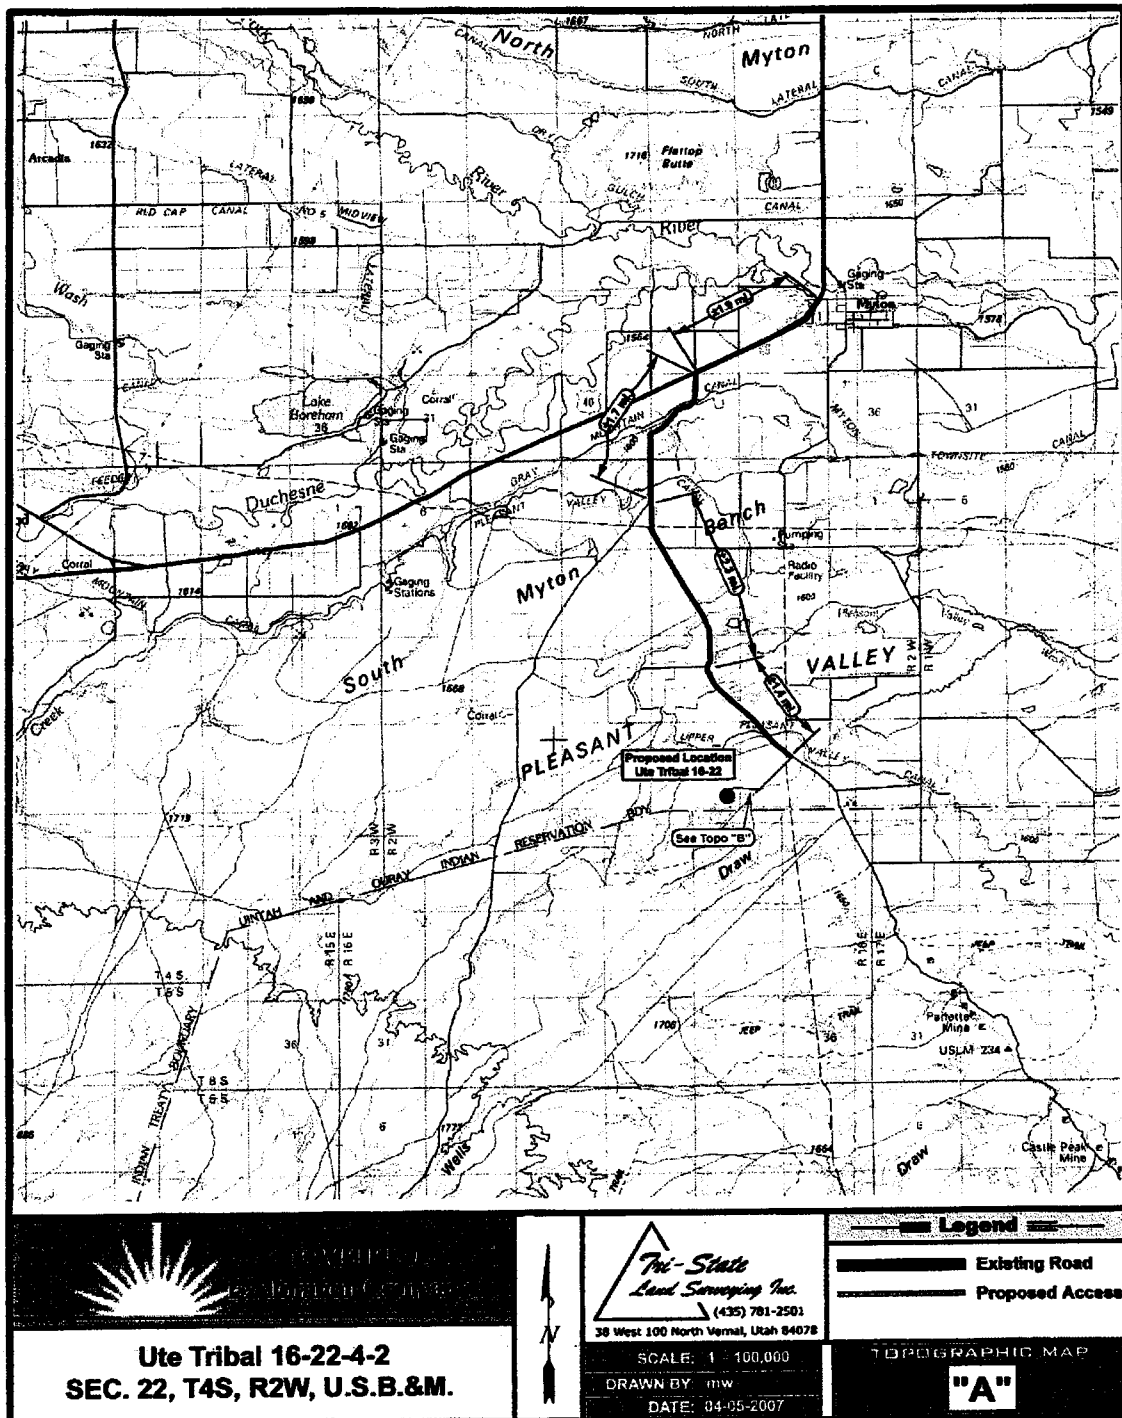

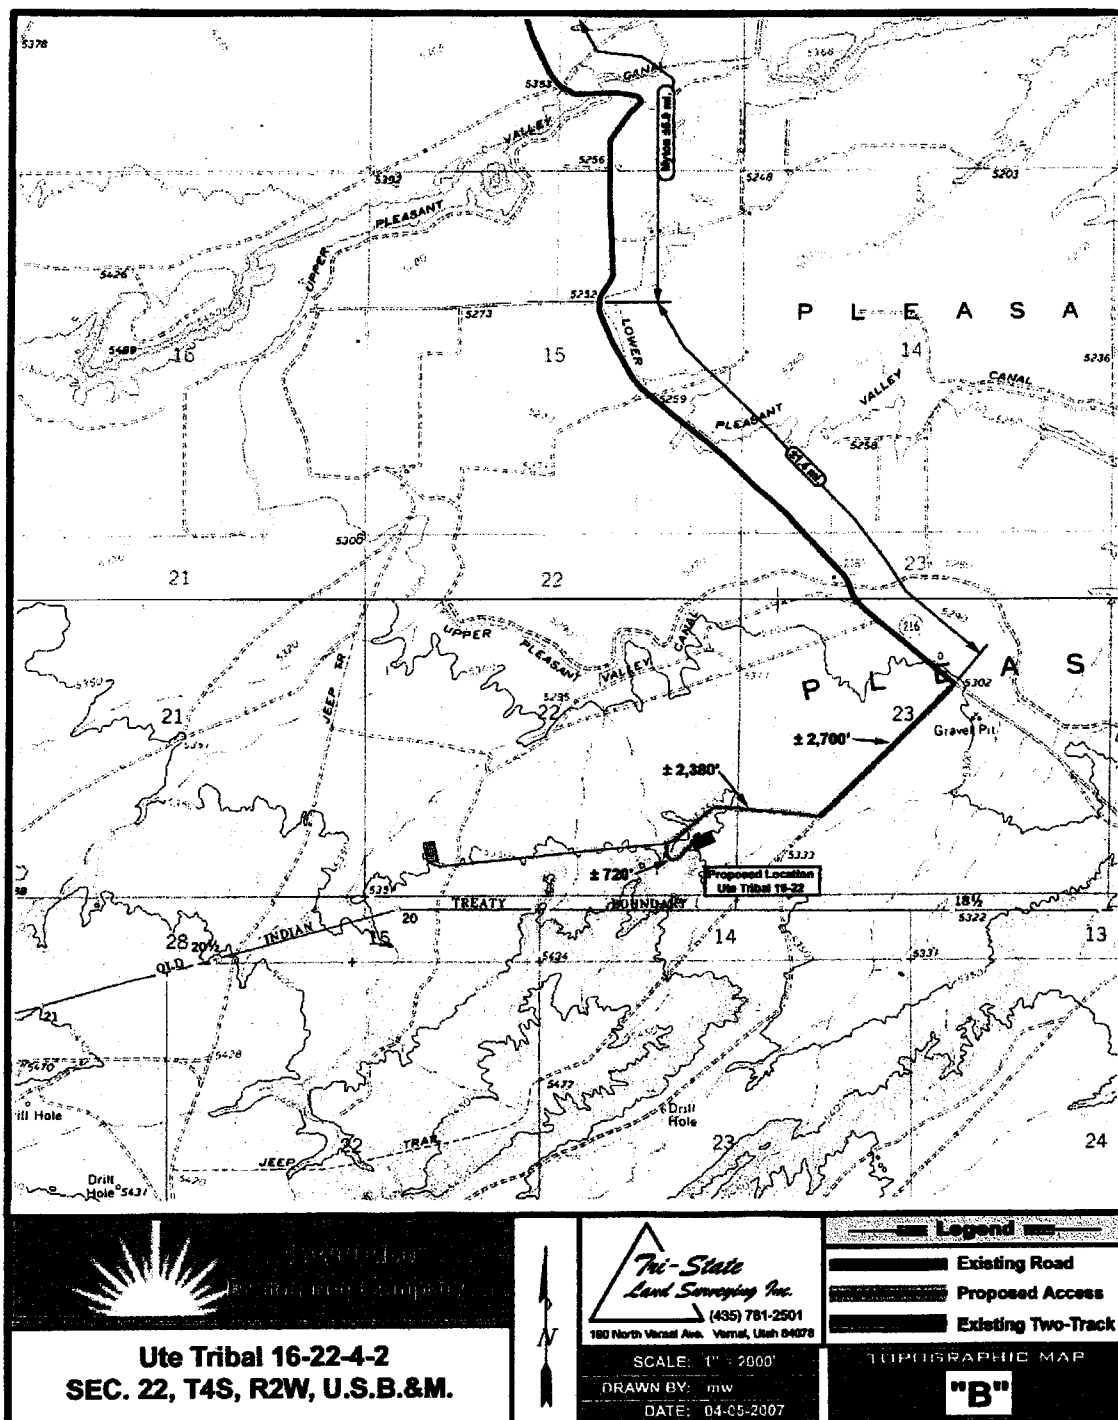

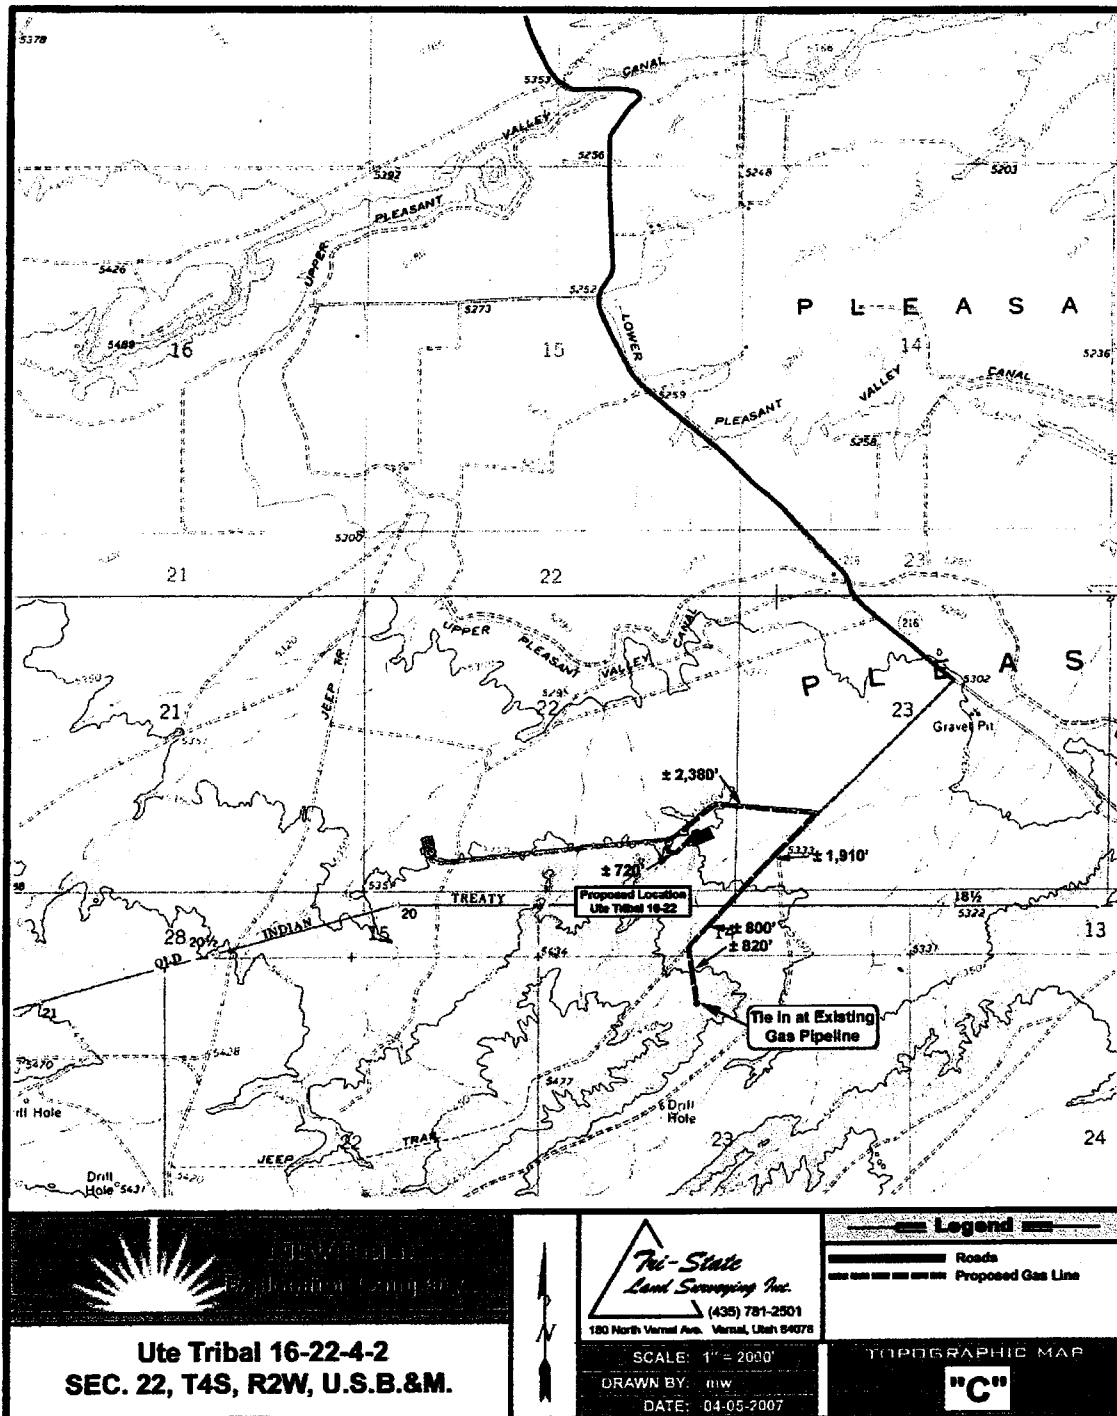

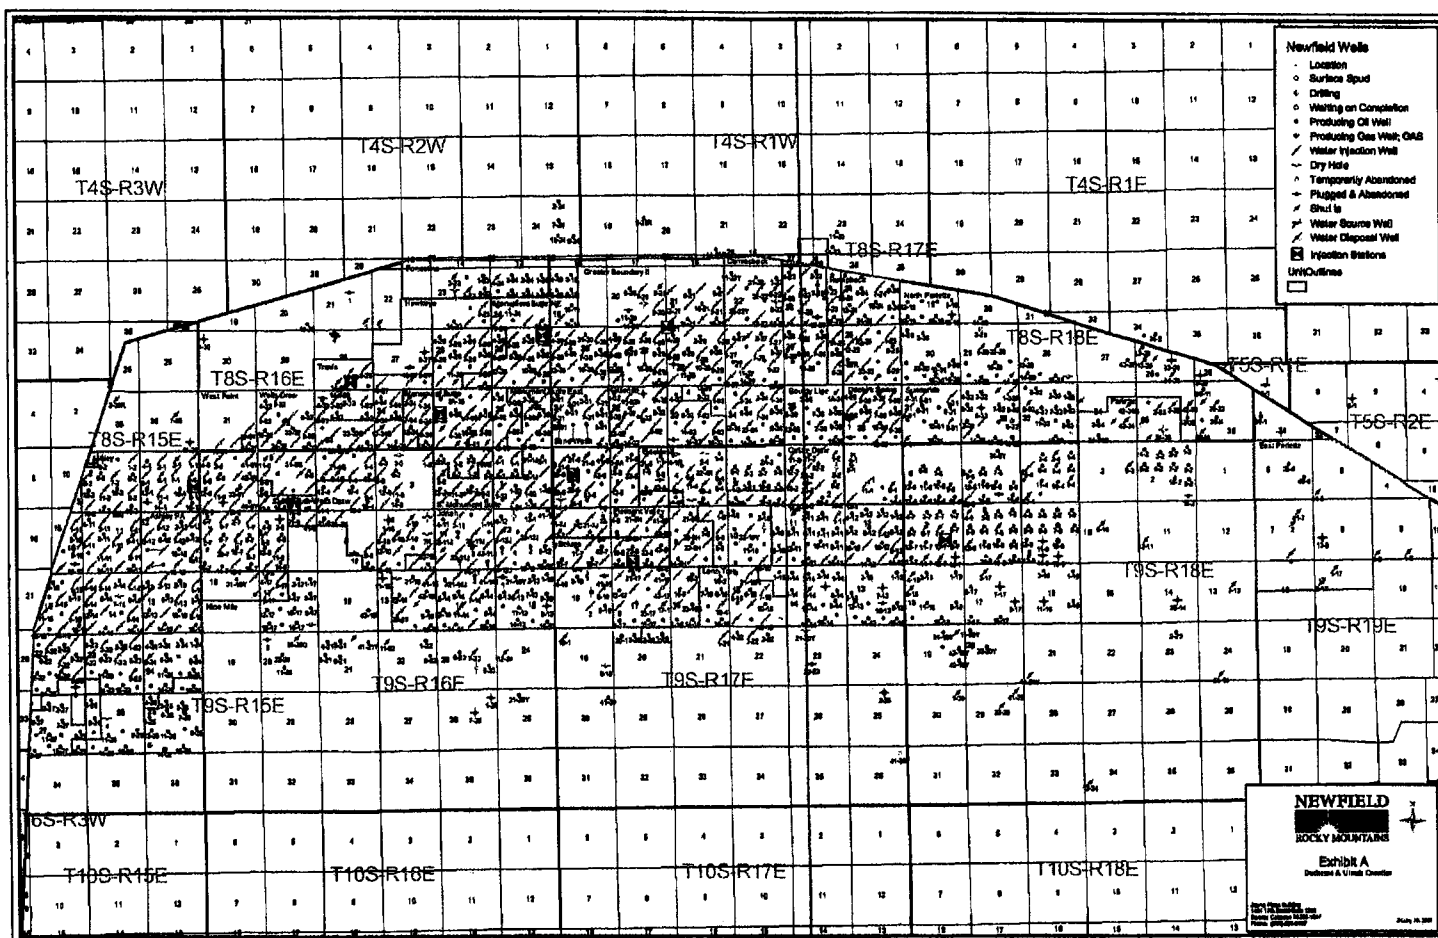

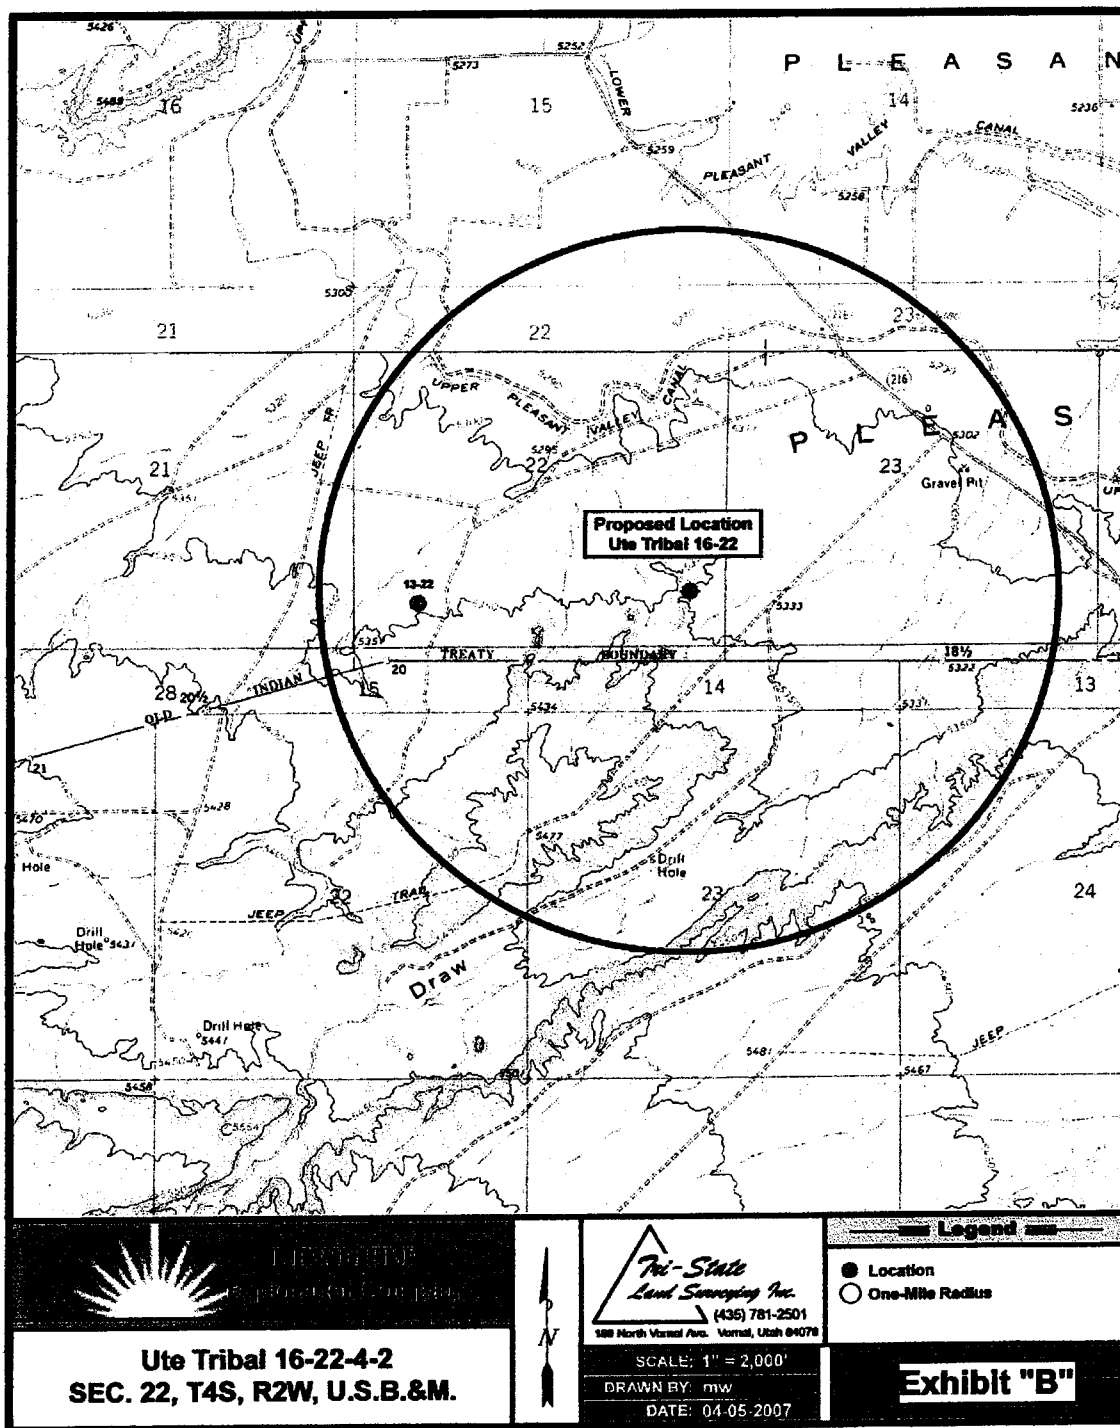

2-M SYSTEM
Blowout Prevention Equipment Systems

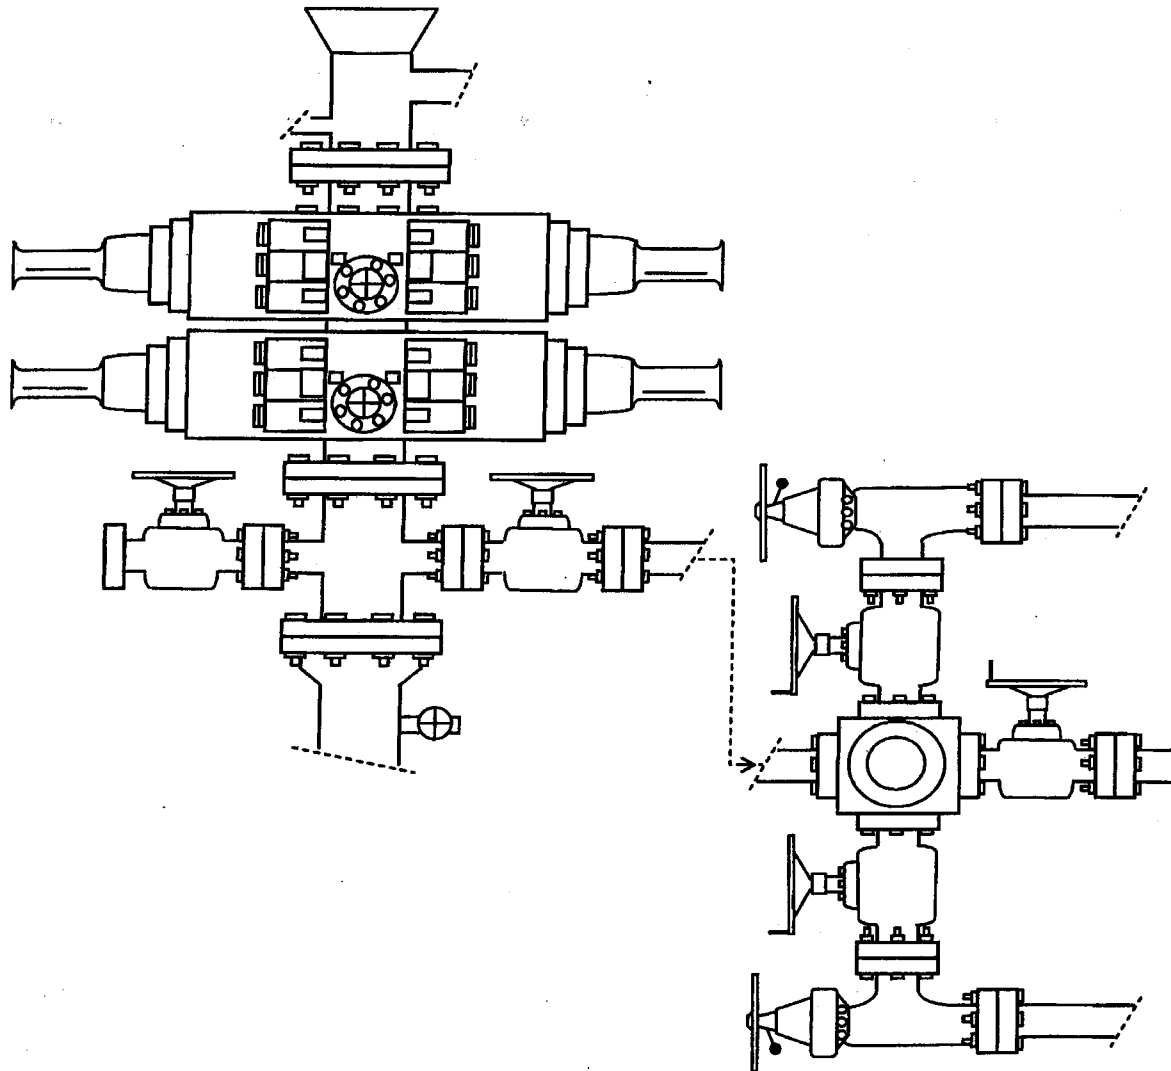


EXHIBIT C


EXHIBIT D

Ute Tribe 16-22-4-2
SESE Sec. 22, T4S, R2W

CULTURAL REPORT WAIVER

For the above referenced location; Clinton Moon, the Private Surface Owner. (Having a Surface Owner Agreement with Newfield Production Company)

Clinton Moon, representing this entity does agree to waive the request from the State of Utah and Bureau of Land Management for an Archaeological/Cultural Survey. This waiver hereby releases Newfield Production Company from this request.

 3/22/07
Clinton Moon Date
Private Surface Owner

 3-26-07
Brad Mechem Date
Newfield Production Company

RECEIVED
VERNAL FIELD OFFICE

MAY 08 2007

2007 MAY 11 PM 1:39

FORM APPROVED
OMB No. 1004-0136
Expires January 31, 2004

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT



DEPT. OF THE INTERIOR
BUREAU OF LAND MGMT.

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. 20G0005609	
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name Ute	
2. Name of Operator Newfield Production Company		7. If Unit or CA Agreement, Name and No. N/A	
3a. Address Route #3 Box 3630, Myton UT 84052		8. Lease Name and Well No. Ute Tribal 16-22-4-2	
3b. Phone No. (include area code) (435) 646-3721		9. API Well No. 73-013-33625	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SE/SE 836' FSL 582' FEL At proposed prod. zone		10. Field and Pool, or Exploratory Monument Butte	
11. Sec., T., R., M., or Blk. and Survey or Area SE/SE Sec. 22, T4S R2W		12. County or Parish Duchesne	
13. State UT		14. Distance in miles and direction from nearest town or post office* Approximatley 8.4 miles southwest of Myton, Utah	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) Approx. 582' f/lse, NA' f/unit NA		16. No. of Acres in lease NA	
17. Spacing Unit dedicated to this well 40 Acres		18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. NA	
19. Proposed Depth 6800'		20. BLM/BIA Bond No. on file B002792	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5354' GL		22. Approximate date work will start* 3rd Quarter 2007	
23. Estimated duration Approximately seven (7) days from spud to rig release.		24. Attachments	

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

- | | |
|---|--|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature 	Name (Printed/Typed) Mandie Crozier	Date 5/1/07
Title Regulatory Specialist		
Approved by (Signature) 	Name (Printed/Typed) J. Kencata	Date 6-26-2007
Title Assistant Field Manager Land & Mineral Resources	Office VERNAL FIELD OFFICE	

Application approval does not warrant or certify the the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

RECEIVED

JUL 02 2007

DIV. OF OIL, GAS & MINING

2006M
NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Newfield Production Company
Well No: Ute Tribal 16-22-4-2
API No: 43-013- 33635

Location: SESE, Sec. 22, T4S, R2W
Lease No: 2OG0005609
Agreement: N/A

Title	Name	Office Phone Number	Cell Phone Number
Petroleum Engineer:	Matt Baker	(435) 781-4490	(435) 828-4470
Petroleum Engineer:	Michael Lee	(435) 781-4432	(435) 828-7875
Petroleum Engineer:	James Ashley	(435) 781-4470	(435) 828-7874
Petroleum Engineer:	Ryan Angus	(435) 781-4430	(435) 828-7368
Supervisory Petroleum Technician:	Jamie Sparger	(435) 781-4502	(435) 828-3913
NRS/Enviro Scientist:	Paul Buhler	(435) 781-4475	(435) 828-4029
NRS/Enviro Scientist:	Karl Wright	(435) 781-4484	
NRS/Enviro Scientist:	Holly Villa	(435) 781-4404	
NRS/Enviro Scientist:	Melissa Hawk	(435) 781-4476	(435) 828-7381
NRS/Enviro Scientist:	Chuck MacDonald	(435) 781-4441	(435) 828-7481
NRS/Enviro Scientist:	Jannice Cutler	(435) 781-3400	
NRS/Enviro Scientist:	Michael Cutler	(435) 781-3401	
NRS/Enviro Scientist:	Anna Figueroa	(435) 781-3407	
NRS/Enviro Scientist:	Verlyn Pindell	(435) 781-3402	
NRS/Enviro Scientist:	Darren Williams	(435) 781-4447	
NRS/Enviro Scientist:	Nathan Packer	(435) 781-3405	

Fax: (435) 781-4410

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Construction Activity	- The Ute Tribe Energy & Minerals Dept. shall be notified in writing 48 hours in advance of any construction activity. The Ute Tribal office is open Monday through Thursday.
Construction Completion	- Upon completion of the pertinent APD/ROW construction, notify the Ute Tribe Energy & Minerals Dept. for a Tribal Technician to verify the Affidavit of Completion.
Spud Notice (Notify Petroleum Engineer)	- Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to running casing and cementing all casing strings.
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

ATTACHMENT 1 –

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

- All applicable local, state, and/or federal laws, regulations, and/or statutes will be complied with.
- All areas of disturbance (including surface pipelines) must have appropriate surface use agreements or approvals in place with the proper owner or agency before such action is started.
- Pipelines on BLM managed surface, as submitted on the APD, are not approved at this time and will be addressed at a later date.

DOWNHOLE COAs:

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- Chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.

- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or

data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Company: NEWFIELD PRODUCTION COMPANY

Well Name: UTE TRIBAL 16-22-4-2

Api No: 43-013-33635 Lease Type: INDIAN-FEE SURF

Section 22 Township 04S Range 02W County DUCHESNE

Drilling Contractor NDSI RIG # NS#1

SPUDDED:

Date 08/02/07

Time 8:00 AM

How DRY

Drilling will Commence: _____

Reported by DON BASTIAN

Telephone # (435) 823-6012

Date 08/02/07 Signed CHD

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires January 31, 2004

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

FEE

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or

8. Well Name and No.

UTE TRIBAL 16-22-4-2W

9. API Well No.

4301333635

10. Field and Pool, or Exploratory Area

MONUMENT BUTTE

11. County or Parish, State

DUCHESNE, UT

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630

Myton, UT 84052

3b. Phone (include area code)

435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SESE Section 22 T4S R2W

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Spud Notice _____
	<input type="checkbox"/> Convert to	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 8/2/2007 MIRU NDSI NS # 1. Spud well @ 8:00 AM. Drill 310' of 12 1/4" hole with air mist. TIH W/ 7 Jt's 8 5/8" J-55 24 # csgn. Set @ 315.48' KB On 8/7/2007 cement with 160 sks of class "G" w/ 2% CaCL2 + 1/4# sk Cello- Flake Mixed @ 15.8 ppg > 1.17 cf/ sk yeild. Returned 3 bbls cement to pit. WOC.

I hereby certify that the foregoing is true and correct (Printed/ Typed)

Troy Zufelt

Signature

Title

Drilling Supervisor

Date

08/08/2007

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on reverse)

RECEIVED

AUG 10 2007

DIV. OF OIL, GAS & MINING

NEWFIELD PRODUCTION COMPANY - CASING & CEMENT REPORT

8 5/8 CASING SET AT 315.48

LAST CASING 8 5/8" set @ 315.48
 DATUM 12' KB
 DATUM TO CUT OFF CASING _____
 DATUM TO BRADENHEAD FLANGE _____
 TD DRILLER 310 LOGGER _____
 HOLE SIZE 12 1/4

OPERATOR Newfield Production Company
 WELL Ute Tribal 16-22-4-2
 FIELD/PROSPECT Monument Butte
 CONTRACTOR & RIG # NDSI NS # 1

LOG OF CASING STRING:

PIECES	OD	ITEM - MAKE - DESCRIPTION	WT / FT	GRD	THREAD	CONDT	LENGTH
		Shoe Joint 39.91'					
		WHI - 92 csg head			8rd	A	0.95
7	8 5/8"	Maverick ST&C csg	24#	J-55	8rd	A	303.63
		GUIDE shoe			8rd	A	0.9

CASING INVENTORY BAL.	FEET	JTS	TOTAL LENGTH OF STRING	305.48
TOTAL LENGTH OF STRING	305.48	7	LESS CUT OFF PIECE	2
LESS NON CSG. ITEMS	1.85		PLUS DATUM TO T/CUT OFF CSG	12
PLUS FULL JTS. LEFT OUT	0		CASING SET DEPTH	315.48

TOTAL	303.63	7	} COMPARE	
TOTAL CSG. DEL. (W/O THRDS)	303.63	7		
TIMING	1ST STAGE			
BEGIN RUN CSG.	Spud	8/2/2007	8:00 AM	GOOD CIRC THRU JOB <u>Yes</u>
CSG. IN HOLE		8/2/2007	3:00 PM	Bbls CMT CIRC TO SURFACE <u>3</u>
BEGIN CIRC		8/7/2007	10:40 AM	RECIPROCATED PIPE FOR <u>N/A</u>
BEGIN PUMP CMT		8/7/2007	10:54 AM	
BEGIN DSPL. CMT		8/7/2007	11:07 AM	BUMPED PLUG TO <u>677</u> PSI
PLUG DOWN		8/7/2007	11:13 AM	

CEMENT USED	CEMENT COMPANY- B. J.		
STAGE	# SX	CEMENT TYPE & ADDITIVES	
1	160	Class "G" w/ 2% CaCL2 + 1/4#/sk Cello-Flake mixed @ 15.8 ppg 1.17 cf/sk yield	

CENTRALIZER & SCRATCHER PLACEMENT	SHOW MAKE & SPACING
Centralizers - Middle first, top second & third for 3	

COMPANY REPRESENTATIVE Troy Zufelt DATE 8/7/2007

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

5. LEASE DESIGNATION AND SERIAL NUMBER:

2060005609

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

8. WELL NAME and NUMBER:

UTE TRIBAL 16-22-4-2W

9. API NUMBER:

4301333635

10. FIELD AND POOL, OR WILDCAT:

MONUMENT BUTTE

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL:

OIL WELL ☒

GAS WELL ☐

OTHER

2. NAME OF OPERATOR:

NEWFIELD PRODUCTION COMPANY

3. ADDRESS OF OPERATOR:

Route 3 Box 3630

CITY Myton

STATE UT

ZIP 84052

PHONE NUMBER

435.646.3721

4. LOCATION OF WELL:

FOOTAGES AT SURFACE:

COUNTY: DUCHESNE

OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: SESE, 22, T4S, R2W

STATE: UT

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will _____	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> PRODUCTION (START/STOP) <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	<input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARITLY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLAIR <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> WATER SHUT-OFF <input checked="" type="checkbox"/> OTHER: - Spud Notice
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: 08/08/2007			

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

On 8/2/2007 MIRU NDSI NS # 1. Spud well @ 8:00 AM. Drill 310' of 12 1/4" hole with air mist. TIH W/ 7 Jt's 8 5/8" J-55 24 # csgn. Set @ 315.48' KB On 8/7/2007 cement with 160 sks of class "G" w/ 2% CaCL2 + 1/4# sk Cello- Flake Mixed @ 15.8 ppg > 1.17 cf/ sk yeild. Returned 3 bbls cement to pit. WOC.

RECEIVED
VERNAL FIELD OFFICE
2007 AUG -9 PM12:53
DEPT. OF THE INTERIOR
BUREAU OF LAND MGMT.

NAME (PLEASE PRINT) Troy Zufelt

TITLE Drilling Supervisor

SIGNATURE

DATE 08/08/2007

(This space for State use only)

RECEIVED

AUG 20 2007

DIV. OF OIL, GAS & MINING

NEWFIELD PRODUCTION COMPANY - CASING & CEMENT REPORT

8 5/8 CASING SET AT 315.48

LAST CASING 8 5/8" set @ 315.48
 DATUM 12' KB
 DATUM TO CUT OFF CASING _____
 DATUM TO BRADENHEAD FLANGE _____
 TD DRILLER 310 LOGGER _____
 HOLE SIZE 12 1/4

OPERATOR Newfield Production Company
 WELL Ute Tribal 16-22-4-2
 FIELD/PROSPECT Monument Butte
 CONTRACTOR & RIG # NDSI NS # 1

LOG OF CASING STRING:

PIECES	OD	ITEM - MAKE - DESCRIPTION	WT / FT	GRD	THREAD	CONDT	LENGTH
		Shoe Joint 39.91'					
		WHI - 92 csg head			8rd	A	0.95
7	8 5/8"	Maverick ST&C csg	24#	J-55	8rd	A	303.63
		GUIDE shoe			8rd	A	0.9
CASING INVENTORY BAL.		FEET	JTS	TOTAL LENGTH OF STRING			305.48
TOTAL LENGTH OF STRING		305.48	7	LESS CUT OFF PIECE			2
LESS NON CSG. ITEMS		1.85		PLUS DATUM TO T/CUT OFF CSG			12
PLUS FULL JTS. LEFT OUT		0		CASING SET DEPTH			315.48
TOTAL		303.63	7	} COMPARE			
TOTAL CSG. DEL. (W/O THRDS)		303.63	7				
TIMING		1ST STAGE					
BEGIN RUN CSG.		Spud 8/2/2007	8:00 AM	GOOD CIRC THRU JOB <u>Yes</u>			
CSG. IN HOLE		8/2/2007	3:00 PM	Bbls CMT CIRC TO SURFACE <u>3</u>			
BEGIN CIRC		8/7/2007	10:40 AM	RECIPROCATED PIPE FOR <u>N/A</u>			
BEGIN PUMP CMT		8/7/2007	10:54 AM				
BEGIN DSPL. CMT		8/7/2007	11:07 AM	BUMPED PLUG TO <u>677</u> PSI			
PLUG DOWN		8/7/2007	11:13 AM				

CEMENT USED		CEMENT COMPANY- B. J.
STAGE	# SX	CEMENT TYPE & ADDITIVES
1	160	Class "G" w/ 2% CaCL2 + 1/4#/sk Cello-Flake mixed @ 15.8 ppg 1.17 cf/sk yield
CENTRALIZER & SCRATCHER PLACEMENT		SHOW MAKE & SPACING
Centralizers - Middle first, top second & third for 3		

COMPANY REPRESENTATIVE Troy Zufelt DATE 8/7/2007

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING
ENTITY ACTION FORM - FORM 6

OPERATOR: NEWFIELD PRODUCTION COMPANY
ADDRESS: RT. 3 BOX 3630
MYTON, UT 84052

OPERATOR ACCT. NO. N2885

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION				COUNTY	SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG			
A	99999	16321	4301333143	FEDERAL 12-21-9-16	NWSW	21	9S	16E	DUCHESNE	7/30/2007	8/28/07
WELL 1 COMMENTS: <i>GRUV</i>											
A	99999	16322	4301333635	UTE TRIBAL 16-22-4-2	SESE	22	4S	2E	DUCHESNE	8/2/2007	8/28/07
<i>GRUV</i>											
A	99999	16323	4301333636	UTE TRIBAL 13-22-4-2	SWSW	22	4S	2E	DUCHESNE	8/3/2007	8/28/07
<i>GRUV</i>											
B	99999	12417	4301333291	LONE TREE FED 4-21-9-17	NWNW	21	9S	17E	DUCHESNE	8/9/2007	8/28/07
<i>GRUV</i>											
WELL 5 COMMENTS:											
WELL 6 COMMENTS:											

ACTION CODES (See instructions on back of form)

- A - new entity for new well (single well only)
- B - well to existing entity (group or unit well)
- C - from one existing entity to another existing entity
- D - well from one existing entity to a new entity
- E - other (explain in comments section)

NOTE: Use COMMENT section to explain why more than one Action Code was selected.

RECEIVED
AUG 09 2007

DIV. OF OIL, GAS & MINING

[Signature]
Signature
Jentri Park
Production Clerk
August 9, 2007
Date

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires January 31, 2004

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

FEE

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or

8. Well Name and No.

UTE TRIBAL 16-22-4-2W

9. API Well No.

4301333635

10. Field and Pool, or Exploratory Area

MONUMENT BUTTE

11. County or Parish, State

DUCHESNE, UT

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630

Myton, UT 84052

3b. Phone (include area code)

435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SESE Section 22 T4S R2W

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Weekly Status Report _____
	<input type="checkbox"/> Convert to	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 8/12/07 MIRU Patterson # 155. Set all equipment. Pressure test Kelly, TIW, Choke manifold, & Bop's to 2,000 psi. Test 8.625 csgn to 1,500 psi. Vernal BLM field, & Roosevelt DOGM office was notified of test. PU BHA and tag cement @ 270'. Drill out cement & shoe. Drill a 7.875 hole with fresh water to a depth of 6800'. Lay down drill string & BHA. Open hole log w/ Dig/SP/GR log's TD to surface. PU & TIH with Guide shoe, shoe jt, float collar, 169 jt's of 5.5 J-55, 15.5# csgn. Set @ 6799.21/ KB. Cement with 375 sks cement mixed @ 11.0 ppg & 3.43 yld. The 475 sks cement mixed @ 14.4 ppg & 1.24 yld. Returned 41 bbls of cement to reserve pit. Nipple down Bop's. Drop slips @ 110,000 #'s tension. Release rig @ 11:30 pm 8/18/07.

RECEIVED

AUG 22 2007

DIV. OF OIL, GAS & MINING

I hereby certify that the foregoing is true and correct (Printed/ Typed)

Don Bastian

Signature

Don Bastian

Title

Drilling Foreman

Date

08/19/2007

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Office

Date

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on reverse)

NEWFIELD PRODUCTION COMPANY - CASING & CEMENT REPORT

5 1/2" CASING SET AT 6799.21

Flt cllr @ 6758.55

LAST CASING 8 5/8" SET # 315.48'

OPERATOR Newfield Production Company

DATUM 12' KB

WELL Ute Tribal 16-22-4-2

DATUM TO CUT OFF CASING 12'

FIELD/PROSPECT Monument Butte

DATUM TO BRADENHEAD FLANGE

CONTRACTOR & RIG # Patterson #155

TD DRILLER 6800 Loggers

HOLE SIZE 7 7/8"

LOG OF CASING STRING:

PIECES	OD	ITEM - MAKE - DESCRIPTION	WT / FT	GRD	THREAD	COND'T	LENGTH
		Landing Jt					14
		Short jt 4123' (6.00')					
169	5 1/2"	ETC LT & C casing	15.5#	J-55	8rd	A	6746.55
		Float collar					0.6
1	5 1/2"	ETC LT&C csg	15.5#	J-55	8rd	A	39.41
		GUIDE shoe			8rd	A	0.65
CASING INVENTORY BAL.		FEET	JTS	TOTAL LENGTH OF STRING			6801.21
TOTAL LENGTH OF STRING		6801.21	170	LESS CUT OFF PIECE			14
LESS NON CSG. ITEMS		15.25		PLUS DATUM TO T/CUT OFF CSG			12
PLUS FULL JTS. LEFT OUT		299.87	8	CASING SET DEPTH			6799.21
TOTAL		7085.83	178	} COMPARE			
TOTAL CSG. DEL. (W/O THRDS)		7085.83	178				
TIMING		1ST STAGE	2nd STAGE				
BEGIN RUN CSG.		10:00 AM	8/18/2007	GOOD CIRC THRU JOB Yes			
CSG. IN HOLE		3:00PM	8/18/2007	Bbls CMT CIRC TO SURFACE 41			
BEGIN CIRC		3:05 PM	8/18/2007	RECIPROCATED PIPE FOR THRUSTROKE NA			
BEGIN PUMP CMT		4:43 PM	8/18/2007	DID BACK PRES. VALVE HOLD ? Yes			
BEGIN DSPL. CMT		5:40 PM	8/18/2007	BUMPED PLUG TO 1600 PSI			
PLUG DOWN		6:15 PM	8/18/2007				
CEMENT USED		CEMENT COMPANY- B. J.					
STAGE	# SX	CEMENT TYPE & ADDITIVES					
1	375	Premlite II w/ 10% gel + 3 % KCL, 3#s /sk CSE + 2# sk/kolseal + 1/2#s/sk Cello Flake					
		mixed @ 11.0 ppg W / 3.49 cf/sk yield					
2	475	50/50 poz W/ 2% Gel + 3% KCL, .5%EC1,1/4# sk C.F. 2% gel. 3% SM mixed @ 14.4 ppg W/ 1.24 YLD					
CENTRALIZER & SCRATCHER PLACEMENT			SHOW MAKE & SPACING				
Centralizers - Middle first, top second & third. Then every third collar for a total of 20.							

COMPANY REPRESENTATIVE Don Bastian

DATE 8/19/2007

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires January 31, 2004

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.



1. Type of Well
☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator
NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630
Myton, UT 84052

3b. Phone (include area code)
435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
836 FSL 532 FEL
SESE Section 22 T4S R2W

5. Lease Serial No.
2060005609

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or

8. Well Name and No.
UTE TRIBAL 16-22-4-2W

9. API Well No.
4301333635

10. Field and Pool, or Exploratory Area
MONUMENT BUTTE

11. County or Parish, State
DUCHESNE, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to	<input type="checkbox"/> Plug Back	<input checked="" type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Formation water is produced to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E) or at State of Utah approved surface disposal facilities.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

I hereby certify that the foregoing is true and correct (Printed/ Typed) Mandie Crozier	Title Regulatory Specialist
Signature <i>Mandie Crozier</i>	Date 09/07/2007



Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on reverse)

RECEIVED

SEP 10 2007

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

SUNDRY NOTICES AND REPORTS ON WELLS


Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL: OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>		5. LEASE DESIGNATION AND SERIAL NUMBER: FEE
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: Route 3 Box 3630 CITY Myton STATE UT ZIP 84052		7. UNIT or CA AGREEMENT NAME:
4. LOCATION OF WELL: FOOTAGES AT SURFACE:		8. WELL NAME and NUMBER: UTE TRIBAL 16-22-4-2W
OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: SESE, 22, T4S, R2W		9. API NUMBER: 4301333635
COUNTY: DUCHESNE		10. FIELD AND POOL, OR WILDCAT: MONUMENT BUTTE
STATE: UT		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will _____	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> PRODUCTION (START/STOP) <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	<input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLAIR <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> WATER SHUT-OFF <input checked="" type="checkbox"/> OTHER: - Weekly Status Report
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: 09/18/2007			

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The above subject well was completed on 09/04/07, attached is a daily completion status report.

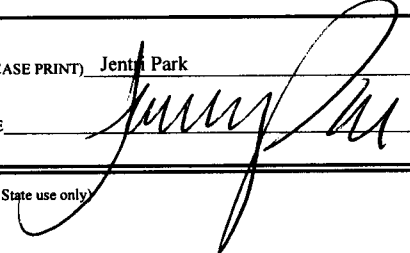NAME (PLEASE PRINT) <u>Jenna Park</u>	TITLE <u>Production Clerk</u>
SIGNATURE 	DATE <u>09/18/2007</u>
(This space for State use only)	

RECEIVED
SEP 24 2007
DIV. OF OIL, GAS & MINING

Daily Activity Report

Format For Sundry

UTE TRIBAL 16-22-4-2**6/1/2007 To 10/30/2007****8/28/2007 Day: 1****Completion**

Rigless on 8/27/2007 - Install 5M frac head. NU 6" 5M Cameron BOP. RU H/O truck & pressure test casing, blind rams, frac head & casing valves to 4500 psi. RU Perforators LLC WLT w/ mast & run CBL under pressure. WLTD @ 6713' & cement top @ surface. Perforate stage #1. CP3 sds @ 6492-6502' w/ 3 1/8" slick guns (19 gram, .49" HE, 120°, 21.92" pen, EXP-3319-331 Titan) w/ 4 spf for total of 40 shots. 161 BWTR. SIFN.

8/29/2007 Day: 2**Completion**

Rigless on 8/28/2007 - RU BJ Services. 11 psi on well. Frac CP3 sds w/ 14,722#'s of 20/40 sand in 314 bbls of Lightning 17 fluid. Broke @ 2720 psi. Pumped 780 gals of fresh wtr mixed with 30 gals of Techni-Hib 767W. Treated w/ ave pressure of 2535 psi @ ave rate of 24.8 BPM. Pumped 504 gals of 15% HCL in flush for Stage #2. ISIP 2485 psi. Leave pressure on well. 475 BWTR RU Perforators WLT, crane & lubricator. RIH w/ Weatherford 5-1/2" 6K composite flow through frac plug, 5' & 10' perf gun. Set plug @ 6450'. Perforate CP2 sds @ 6379-84', CP1 sds @ 6342-52' w/ 3-1/8" Slick Guns (19 gram, .49" HE, 120°, 21.92" pen, EXP-3319-331 Titan) w/ 4 spf for total of 60 shots. RU BJ Services. 1755 psi on well. Frac CP1 & CP2 sds w/ 65,087#'s of 20/40 sand in 581 bbls of Lightning 17 fluid. Broke @ 2770 psi. Pumped 780 gals of fresh wtr mixed with 30 gals of Techni-Hib 767W. Treated w/ ave pressure of psi @ ave rate of 24.7 BPM. Pumped 504 gals of 15% HCL in flush for Stage #3. ISIP 2493 psi. Leave pressure on well. 1056 BWTR RU Perforators WLT, crane & lubricator. RIH w/ Weatherford 5-1/2" 6K composite flow through frac plug & 7' perf gun. Set plug @ 5850'. Perforate B2 sds @ 5738-45' w/ 3-1/8" Slick Guns (19 gram, .49" HE, 120°, 21.92" pen, EXP-3319-331 Titan) w/ 4 spf for total of 28 shots. RU BJ Services. 1808 psi on well. Frac B2 sds w/ 34,488#'s of 20/40 sand in 395 bbls of Lightning 17 fluid. Broke @ 3366 psi. Pumped 780 gals of fresh wtr mixed with 30 gals of Techni-Hib 767W. Treated w/ ave pressure of 1898 psi @ ave rate of 24.7 BPM. Pumped 504 gals of 15% HCL in flush for Stage #4. ISIP 2205 psi. Leave pressure on well. 1451 BWTR RU Perforators WLT, crane & lubricator. RIH w/ Weatherford 5-1/2" 6K composite flow through frac plug & 18' perf gun. Set plug @ 5590'. Perforate D2 sds @ 5468-86' w/ 3-1/8" Slick Guns (19 gram, .49" HE, 120°, 21.92" pen, EXP-3319-331 Titan) w/ 4 spf for total of 72 shots. RU BJ Services. 1710 psi on well. Frac D2 sds w/ 74,825#'s of 20/40 sand in 616 bbls of Lightning 17 fluid. Broke @ 3082 psi. Pumped 780 gals of fresh wtr mixed with 30 gals of Techni-Hib 767W. Treated w/ ave pressure of 2267 psi @ ave rate of 24.7 BPM. Pumped 504 gals of 15% HCL in flush for Stage #5. ISIP 2471 psi. Leave pressure on well. 2067 BWTR RU Perforators WLT, crane & lubricator. RIH w/ Weatherford 5-1/2" 6K composite flow through frac plug & 6' perf gun. Set plug @ 5190'. Perforate PB8 sds @ 5085-91' w/ 3-1/8" Slick Guns (19 gram, .49" HE, 120°, 21.92" pen, EXP-3319-331 Titan) w/ 4 spf for total of 24 shots. RU BJ Services. 1691 psi on well. Frac PB8 sds w/ 13,980#'s of 20/40 sand in 269 bbls of Lightning 17 fluid. Broke @ 2543 psi. Pumped 780 gals of fresh wtr mixed with 30 gals of Techni-Hib 767W. Treated w/ ave pressure of 2748 psi @ ave rate of 24.7 BPM. ISIP 2584 psi. Begin immediate flowback on 12/64 choke @ 1 BPM. Flowed for 6.5 hrs & died. Rec. 371 BTF. SIWFN w/ 1965 BWTR

8/30/2007 Day: 3**Completion**

Western #2 on 8/29/2007 - MIRU Western #2. Bleed pressure off well. Rec 170 BTF & stays flowing steady. Fair oil & gas. Shut in and bullhead 50 BW dn casing W/ final pressure @ 700 psi. Bleed well off. Rec 50 BW fairly quick & maintains flow. Rec add'l 60 BTF. RU Perforators LLC & run Weatherford 5 1/2" solid composite bridge plug. Set plug @ 5000'. RD WLT. Bleed pressure off well. ND Cameron BOP & 5M frac head. Install 3M production tbg head & NU Weatherford Schaeffer BOP. SIFN W/ est 1735 BWTR.

8/31/2007 Day: 4

Completion

Western #2 on 8/30/2007 - 0 psi on well. Talley, drift, PU & TIH W/ Weatherford 4 3/4" "Chomp" bit, bit sub & 130 new jts 2 7/8 8rd 6.5# J-55 tbg. Circ well clean. Cont PU tbg, 25 jts. Tagged sand @ 4886', C/O to kill plug @ 5000'. RU power swivel. C/O sd & drill out composite bridge plugs as follows. Sand @ 4886', plug @ 5000' in 8 mins; Sand @ 5138', plug @ 5190' in 15 mins; No sand, plug @ 5590' in 1 hr 10 mins; No sand, plug @ 5850' in 50 mins, No sand', plug @ 6450' in 22 mins, Circ hole clean w/ EOT @ 6461'. SIFN W/ est 1690 BWTR.

9/1/2007 Day: 5

Completion

Western #2 on 8/31/2007 - 0 psi on well. Tag sand @ 6512'. C/O to PBTD 6759'. LD 2 jts of tbg. EOT @ 6717'. RU swab equipment. IFL @ sfc. Made 12 runs, Rec 162 bbls, Well started flowing. Trace of oil, No sand. RD swab equipment. Pumped 20 bbls down tbg to kill well. PU 2 jts of tbg. Tagged sand @ 6756' C/O to PBTD @ 6759'. LD 7 jts of tbg. TOH w/ 208 jts of 2 7/8 tbg. LD bit & bitsub. PU & TIH w/ NC, 2- jts, SN, 1 jt, 5 1/2" TA, 147 jts of tbg. EOT @ 4733'. SIFN W/ est 1750 BWTR.

9/5/2007 Day: 6

Completion

Western #2 on 9/4/2007 - Bleed well off--stays flowing W/ fair amount of oil. RU & circ hole W/ clean wtr. Rec est 30 BO. Con't TIH W/ BHA & production tbg f/ 4733' (complete as follows): 2 7/8 NC, 2 jts tbg, SN, 1 jt tbg, new CDI 5 1/2" TA (45K) & 205 jts 2 7/8 8rd 6.5# J-55 tbg. ND BOP. Set TA @ 6466' W/ SN @ 6500' & EOT @ 6564'. Land tbg W/ 16,000# tension. NU wellhead. PU & TIH W/ pump and "A" grade rod string as follows: new CDI 2 1/2" X 1 1/2" X 20' RHAC pump, 6-1 1/2" weight rods, 20-3/4" scraped rods, 134-3/4" plain rods, 99-7/8" scraped rods, 1-8', 1-4' & 1-2' X 7/8" pony rods and 1 1/2" X 26' polished rod. Seat pump & RU pumping unit. W/ tbg full, pressure test tbg & pump to 200 psi. Stroke pump up W/ unit to 800 psi. Good pump action. RDMOSU. Est 1750 BWTR. Place well on production @ 3:00 PM 9/4/2007 W/ 123" SL @ 5 SPM. FINAL REPORT!!

Pertinent Files: Go to File List

SUBMIT IN DUPLICATE*
(See other instructions on reverse side)

FORM APPROVED
OMB NO. 1004-0137
Expires: February 28, 1995

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

WELL COMPLETION OR RECOMPLETION REPORT AND LOG*

1a. TYPE OF WORK OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> DRY <input type="checkbox"/> Other _____		5. LEASE DESIGNATION AND SERIAL NO. 2OG0005609
1b. TYPE OF WELL NEW WELL <input checked="" type="checkbox"/> WORK OVER <input type="checkbox"/> DEEPEN <input type="checkbox"/> PLUG BACK <input type="checkbox"/> DIFF RESVR. <input type="checkbox"/> Other _____		6. IF INDIAN, ALLOTTEE OR TRIBE NAME NA
		7. UNIT AGREEMENT NAME Ute Tribal
		8. FARM OR LEASE NAME, WELL NO. Ute Tribal 16-22-4-206

2. NAME OF OPERATOR Newfield Exploration Company	9. WELL NO. 43-013-33635
--	------------------------------------

3. ADDRESS AND TELEPHONE NO. 1401 17th St. Suite 1000 Denver, CO 80202	10. FIELD AND POOL OR WILDCAT Monument Butte
--	--

4. LOCATION OF WELL (Report locations clearly and in accordance with any State requirements.)* At Surface 836' FSL & 582' FEL (SE/SE) Sec. 22, T4S, R2E At top prod. Interval reported below	11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA Sec. 22, T4S, R2E
---	---

At total depth	14. API NO. 43-013-33635	DATE ISSUED 05/16/07	12. COUNTY OR PARISH Duchesne	13. STATE UT
----------------	------------------------------------	--------------------------------	---	------------------------

15. DATE SPUDDED 08/02/07	16. DATE T.D. REACHED 08/17/07	17. DATE COMPL. (Ready to prod.) 09/04/07	18. ELEVATIONS (DF, RKB, RT, GR, ETC.)* 5354'	19. ELEV. CASINGHEAD 5366'
-------------------------------------	--	---	---	--------------------------------------

20. TOTAL DEPTH, MD & TVD 6800'	21. PLUG BACK T.D., MD & TVD 6759'	22. IF MULTIPLE COMPL., HOW MANY*	23. INTERVALS DRILLED BY ----->	ROTARY TOOLS X	CABLE TOOLS
---	--	-----------------------------------	--	--------------------------	-------------

24. PRODUCING INTERVAL(S), OF THIS COMPLETION--TOP, BOTTOM, NAME (MD AND TVD)* Green River 5085'-6502'	25. WAS DIRECTIONAL SURVEY MADE No
--	--

26. TYPE ELECTRIC AND OTHER LOGS RUN Dual Induction Guard, SP, Compensated Density, Compensated Neutron, GR, Caliper, Cement Bond Log	27. WAS WELL CORED No
---	---------------------------------


23. CASING RECORD (Report all strings set in well)					
CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
8-5/8" - J-55	24#	315'	12-1/4"	To surface with 160 sx Class "G" cmt	
5-1/2" - J-55	15.5#	6799'	7-7/8"	375 sx Premlite II and 475 sx 50/50 Poz	

29. LINER RECORD					30. TUBING RECORD		
SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
					2-7/8"	EOT @ 6564'	TA @ 6466'

31. PERFORATION RECORD (Interval, size and number)			32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.		
INTERVAL	SIZE	SPF/NUMBER	DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED	
(CP3) 6492'-6502'	.49"	4/40	6492'-6502'	Frac w/ 14,722# 20/40 sand in 314 bbls fluid	
(CP2 & 1) 6379'-6384', 6342'-6352'	.49"	4/60	6342'-6384'	Frac w/ 65,087# 20/40 sand in 581 bbls fluid	
(B2) 5738'-5745'	.49"	4/28	5738'-5745'	Frac w/ 34,488# 20/40 sand in 395 bbls fluid	
(D2) 5468'-5486'	.49"	4/72	5468'-5486'	Frac w/ 74,825# 20/40 sand in 616 bbls fluid	
(PB8) 5085'-5091'	.49"	4/24	5085'-5091'	Frac w/ 13,980# 20/40 sand in 269 bbls fluid	

33.* PRODUCTION							
DATE FIRST PRODUCTION 09/04/07	PRODUCTION METHOD (Flowing, gas lift, pumping--size and type of pump) 2-1/2" x 1-1/2" x 20' RHAC SM Plunger Pump					WELL STATUS (Producing or shut-in) PRODUCING	
DATE OF TEST 10 day ave	HOURS TESTED	CHOKE SIZE	PROD'N. FOR TEST PERIOD ----->	OIL--BBL. 145	GAS--MCF. 0	WATER--BBL. 39	GAS-OIL RATIO 0
FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE ----->	OIL--BBL.	GAS--MCF.	WATER--BBL.	OIL GRAVITY-API (CORR.)	

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.) Sold & Used for Fuel	TEST WITNESSED BY SEP 24 2007
---	---

35. LIST OF ATTACHMENTS		DIV. OF OIL, GAS & MINING
36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records		DATE 9/21/2007
SIGNED 	TITLE Production Clerk	JP

*(See Instructions and Spaces for Additional Data on Reverse Side)

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem, tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries);				38. GEOLOGIC MARKERS		
FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	NAME	TOP	
					MEAS. DEPTH	TRUE VERT. DEPTH
			Well Name Ute Tribal 16-22-4-2W	Garden Gulch Mkr	4329'	
				Garden Gulch 1	4546'	
				Garden Gulch 2	4671'	
				Point 3 Mkr	4966'	
				X Mkr	5206'	
				Y-Mkr	5238'	
				Douglas Creek Mkr	5363'	
				BiCarbonate Mkr	5642'	
				B Limestone Mkr	5792'	
				Castle Peak	6293'	
				Basal Carbonate	6676'	
				Total Depth (LOGGERS)	6810'	

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: 20G0005609
1. TYPE OF WELL Oil Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		7. UNIT or CA AGREEMENT NAME:
3. ADDRESS OF OPERATOR: 1001 17th Street, Suite 2000 , Denver, CO, 80202		8. WELL NAME and NUMBER: UTE TRIBAL 16-22-4-2
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0836 FSL 0582 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESE Section: 22 Township: 04.0S Range: 02.0W Meridian: U		9. API NUMBER: 43013336350000
9. FIELD and POOL or WILDCAT: MONUMENT BUTTE		COUNTY: DUCHESNE
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION	<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <div style="border: 1px solid black; padding: 2px; display: inline-block;">3/1/2012</div> <input type="checkbox"/> SPUD REPORT Date of Spud:
<input type="checkbox"/> DRILLING REPORT Report Date:	<input checked="" type="checkbox"/> OTHER			

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.


SEE ATTACHED REVISED SITE FACILITY DIAGRAM

Accepted by the
Utah Division of
Oil, Gas and Mining



FOR RECORD ONLY

August 27, 2012

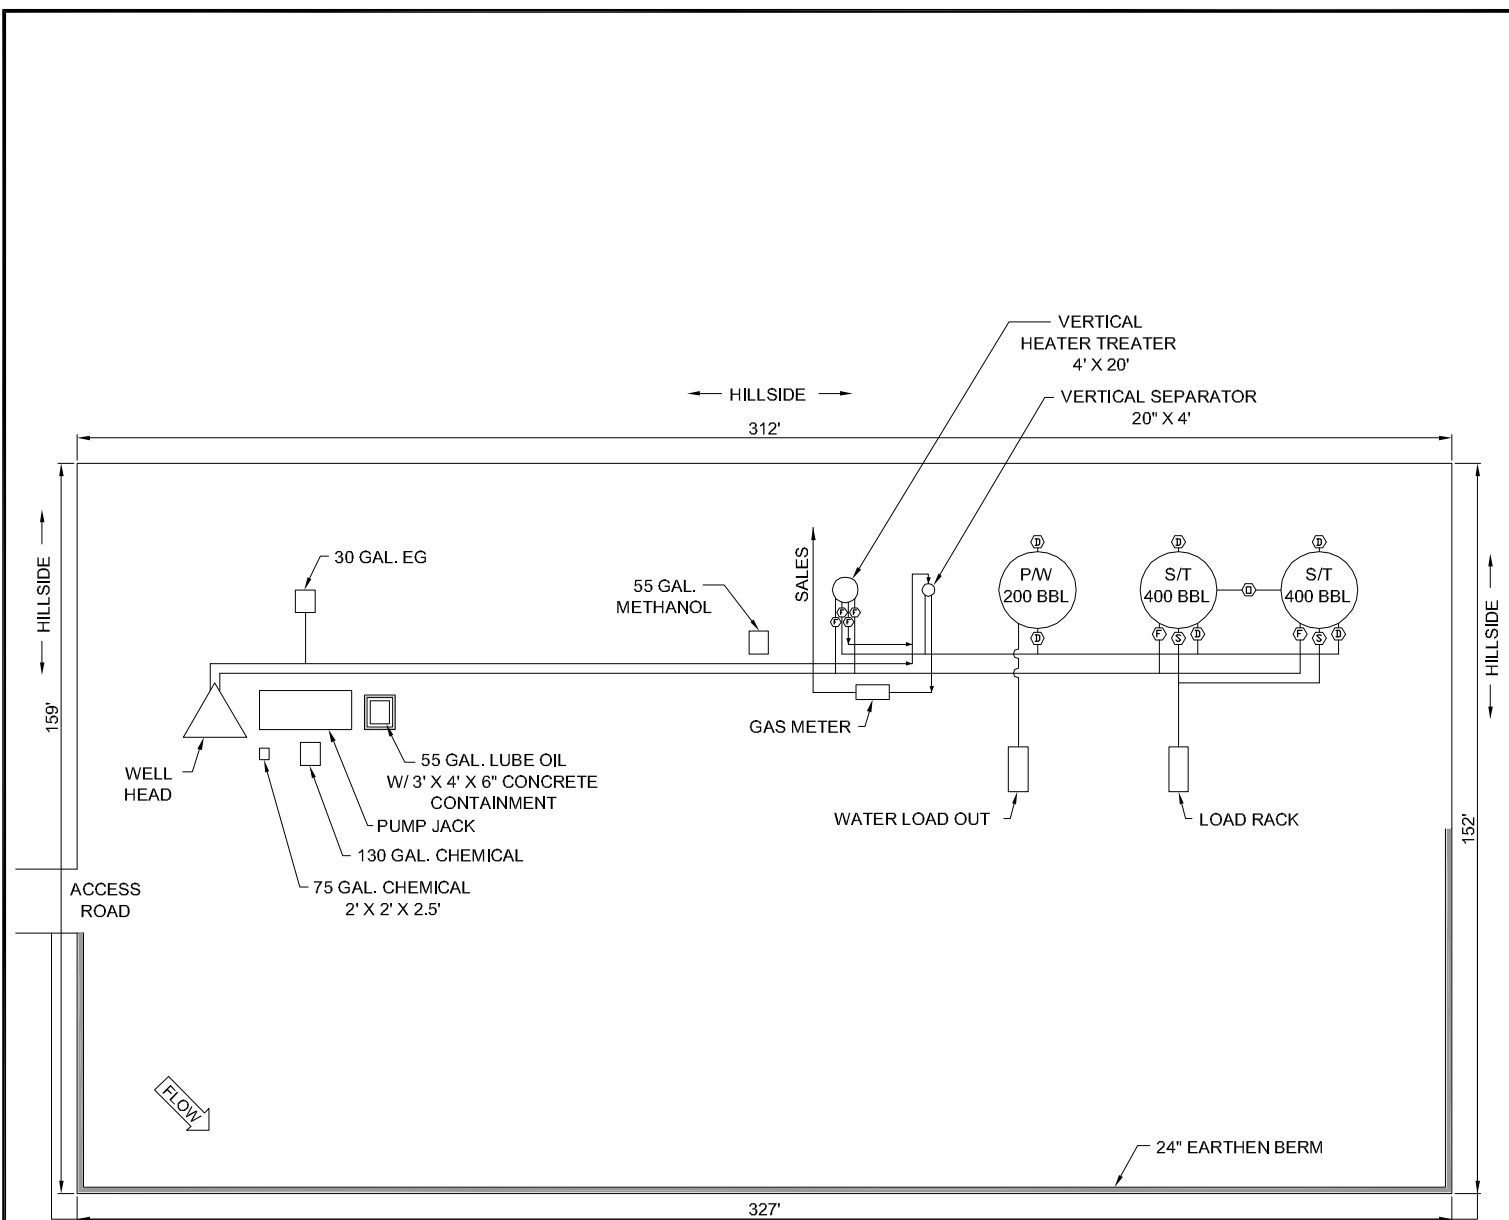NAME (PLEASE PRINT) Jill L Loyle	PHONE NUMBER 303 383-4135	TITLE Regulatory Technician
SIGNATURE N/A	DATE 8/13/2012	



UTU87538X

POSITION OF VALVES AND USE OF SEALS DURING PRODUCTION				Valve Type				Federal Lease #: EDA - 20G0005609 API #: 4301333635						UTE TRIBAL 16-22-4-2			
Valve	Line Purpose	Position	Seal Installed	D - Drain Valve	This lease is subject to the Site Security Plan for: Newfield Exploration Company 19 East Pine Street Pinedale, WY 82941												
D	Drain	Closed	Yes	F - Flow Valve													
F	Oil, Gas, Water	Open	No	O - Overflow													
O	Overflow	Open/Closed	No	V - Vent													
V	Vent	Open	No	R - Recycle					Newfield Exploration Company SESE Sec 22, T4S, R2W Duchesne County, UT								
R	Recycle	Closed	Yes	B - Blow Down													
B	Blowdown	Open/Closed	No	S - Sales Valve													
S	Sales	Closed	Yes														
POSITION OF VALVES AND USE OF SEALS DURING SALES				POSITION OF VALVES AND USE OF SEALS DURING WATER DRAIN				M.G.		MAR 2012		 Note: This drawing represents approximate sizes and distances. Underground pipeline locations are also approximated.					
Valve	Line Purpose	Position	Seal Installed	Valve	Line Purpose	Position	Seal Installed										
D	Drain	Closed	Yes	D	Drain	Open	No										
F	Oil, Gas, Water	Closed	Yes	F	Oil, Gas, Water	Closed	No										
O	Overflow	Closed	Yes	O	Overflow	Closed	No										
V	Vent	Open	No	V	Vent	Open	No										
R	Recycle	Closed	Yes	R	Recycle	Closed	Yes										
B	Blowdown	Closed	No	B	Blowdown	Closed	No										
S	Sales	Open	No	S	Sales	Closed	Yes										

RECEIVED: Aug. 13, 2012