

FILE NOTATIONS

Entered in NID File ✓
 Entered On S R Sheet _____
 Location Map Pinned ✓
 Card Indexed ✓
 I W R for State or Fee Land _____

Checked by Chief R.L.D.
 Copy NID to Field Office ✓
 Approval Letter ✓
 Disapproval Letter _____

COMPLETION DATA:

Date Well Completed 9-10-1960
 OW _____ WW _____ TA _____
 GW _____ OS _____ PA X

Location Inspected _____
 Bond released _____
 State of Fee Land _____

LOGS FILED

Driller's Log 10-25-60

Electric Logs (No.) 2

E _____ I _____ E-I ✓ GR _____ GR-N _____ Micro _____

Lat _____ Mi-L _____ Sonic _____ Others Detail Log

Submerged Lands

SUPERVISOR, OIL AND GAS OPERATIONS:

DESIGNATION OF OPERATOR

The undersigned is, on the records of the Bureau of Land Management, holder of oil and gas lease

DISTRICT LAND OFFICE: Utah
SERIAL No.: 08220

and hereby designates

NAME: Mountain Fuel Supply Company
ADDRESS: P. O. Box 1129, Rock Springs, Wyoming

as his operator and agent, with full authority to act in his behalf in complying with the terms of the lease and regulations applicable thereto and on whom the supervisor or his representative may serve written or oral instructions in securing compliance with the Oil and Gas Operating Regulations with respect to (describe acreage to which this designation is applicable):

T. 15 S. R. 23 E., SLM, Uintah Co., Utah

Section 28: SE $\frac{1}{4}$

containing 160 acres, more or less.

It is understood that this designation of operator does not relieve the lessee of responsibility for compliance with the terms of the lease and the Oil and Gas Operating Regulations. It is also understood that this designation of operator does not constitute an assignment of any interest in the lease.

In case of default on the part of the designated operator, the lessee will make full and prompt compliance with all regulations, lease terms, or orders of the Secretary of the Interior or his representative.

The lessee agrees promptly to notify the oil and gas supervisor of any change in the designated operator.

SOCONY MOBIL OIL COMPANY, INC.
SOCONY MOBIL OIL COMPANY, INC.

[Handwritten Signature]

(Signature of Lessee)


612 So. Flower Street
Los Angeles 54, California

(Address)

June 20, 1960

(Date)

Form 9-531a
(Feb. 1961)



(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Utah
Lease No. 08220
Unit 12222

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Main Canyon ~~WELL~~ Well No. 1 June 24 1960

Well No. 1 is located 1900 ft. from ~~XXXX~~ [S] line and 600 ft. from [E] line of sec. 28

SW NE SE sec. 28 15E 23E S. L.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Main Canyon Area Uintah Utah
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is /..... ft. to follow.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

This well is being drilled on a farmout from Mobil Oil Company. Attached hereto is a copy of Designation of Operator granted by Mobil to Mountain Fuel Supply Company.

We would like permission to drill the subject well to an approximate depth of 8600 feet as a test of the Buckhorn member of the Castlegate formation. We will run and cement about 400 feet of 13-3/8" surface casing, cementing the casing to surface. If commercial oil or gas production is encountered, a production string of 5-1/2" OD casing will be run through the productive zones encountered and cemented with sufficient cement to protect and isolate the producing zones encountered. Our nation-wide bond will apply for the drilling of this well. By copies of this Notice of Intention to Drill, permission to drill this well is being requested of the Utah Oil & Gas Conservation Commission.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Mountain Fuel Supply Company

Address F. O. Box 1129
Rock Springs, Wyoming

By [Signature]

Title Vice President

cc: Utah Oil & Gas Conservation Commission (2)

SUPERVISOR, OIL AND GAS OPERATIONS:

DESIGNATION OF OPERATOR

The undersigned is, on the records of the Bureau of Land Management, holder of oil and gas lease

DISTRICT LAND OFFICE: Utah
SERIAL No.: 08220

and hereby designates

NAME: Mountain Fuel Supply Company
ADDRESS: P. O. Box 1129, Rock Springs, Wyoming

as his operator and agent, with full authority to act in his behalf in complying with the terms of the lease and regulations applicable thereto and on whom the supervisor or his representative may serve written or oral instructions in securing compliance with the Oil and Gas Operating Regulations with respect to (describe acreage to which this designation is applicable):

T. 15 S. R. 23 E., SLM, Uintah Co., Utah

Section 28: SE $\frac{1}{4}$

containing 160 acres, more or less.


It is understood that this designation of operator does not relieve the lessee of responsibility for compliance with the terms of the lease and the Oil and Gas Operating Regulations. It is also understood that this designation of operator does not constitute an assignment of any interest in the lease.

In case of default on the part of the designated operator, the lessee will make full and prompt compliance with all regulations, lease terms, or orders of the Secretary of the Interior or his representative.

The lessee agrees promptly to notify the oil and gas supervisor of any change in the designated operator.

SOCONY MOBIL OIL COMPANY, INC.

By: P. E. Bermingham

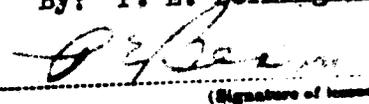
(Signature of lessee)

612 South Flower Street
Los Angeles 54, California

(Address)

June 20, 1960

(Date)

Field Main Canyon State Utah County Uintah Sec. 28 T. 15 S. R. 23 E.

Company Mountain Fuel Supply Farm Main Canyon Well No. 1

Location 660' FEL, 1980' FSL Elev. 7789.81', Gr. 7801' Rotary Bushing

Drilling Commenced July 6, 1960 Completed August 30, 1960

Rig Released September 10, 1960 Total Depth 9051'

Casing Record 13-3/8-inch at 380.45 feet w/420 sacks cement
5-1/2-inch at 8511.01 feet w/300 sacks cement

Tubing Record 2-3/8-inch at 8318.81 feet

Perforations 4 holes per foot from 8346'-8354' and 8361'-8378'
 (Above perforations subjected to sand-oil treatment.)

		28	
	Main Canyon		o
	Well No. 1		

I. P. Gas ----- Oil -----

Sands -----

Shut-in Surface Pressures -----

Remarks Plugged and Abandoned in Entrada

FORMATION RECORD

FORMATION RECORD

--Green River--

	FROM	TO
No Samples.	0	100
Shale, green and light green, sandy, containing some shell fragments, with thin limestones and sandstones; some ostracodal limestones.	100	500
Sandstone, light gray, very fine grained, with shale inclusions.	500	590
Shale, gray, buff and cream, sandy, slightly calcareous.	590	680
Shale, red, chocolate brown, sandy and calcareous interbedded with olive green and green shale.	680	780
Shale, light green, sandy; limestone, buff, oolitic and ostracodal; sandstone, light gray, very fine grained, argillaceous, soft.	780	1365

--Top of WASATCH @ 1365'--

Shale, green, gray and red, bentonitic, soft; sandstone, light gray, fine grained, some coarse grained and conglomeratic, some micaceous and some calcareous, some containing shale fragments.	1365	2475
------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------	------

--Top of MESAVERDE @ 2475'--

Shale, drab, gray, dark gray, some sandy, some slightly carbonaceous; sandstone, light gray to dark gray, fine to medium grained, some with carbonaceous laminations, tight.	2475	3210
Shale, gray, dark gray, with some carbonaceous laminations, some brown and coaly, some sandy; sandstone, light gray to gray, fine to medium grained, salt and pepper type, some with carbonaceous laminations, calcareous in part, mostly hard and tight.	3210	3625

Field Main Canyon

Sec. 28 T. 15 S.R. 23 E.

Page 2

Farm Main Canyon

Well No. 1

Company Mountain Fuel Supply

FORMATION RECORD

<u>From</u>	<u>To</u>	
3625	3980	Shale, dark gray and brown, some silty, some carbonaceous; sandstone, white to light gray, fine grained, salt and pepper type, some slightly calcareous; trace limestone, buff, hard; abundant coal. --Top of <u>SEGO</u> @ 3980'-- --Top of <u>BUCK TONGUE</u> @ 4165'--
3980	4300	Sandstone, gray to white and light gray, very fine grained to medium grained, silty in part, calcareous; some shale, gray, gray brown, carbonaceous, silty in part; occasional coal.
4300	4440	Siltstone, gray, brownish gray, very argillaceous; some shale, gray, sandy and carbonaceous. --Top of <u>CASTLEGATE</u> @ 4440'--
4440	4565	Sandstone, gray, light gray, silty to fine grained, calcareous, carbonaceous in part, hard and tight. --Top of <u>MANCOS</u> @ 4565'--
4565	5205	Shale, gray to dark gray, very silty, slightly micaceous, some with pyritic streaks; occasional thin beds dark gray, very argillaceous limestone. --Top of <u>"B" Zone or Emery</u> @ 5205'--
5205	5900	Sandstone, dark gray, very fine grained, very argillaceous, silty in part, very calcareous, carbonaceous in part, containing fossil fragments and calcite veins, very hard and tight. --Top of <u>Base "B" or Emery</u> @ 5900'--
5900	7160	Shale, dark gray to black, silty, calcareous, slightly micaceous, occasional trace calcite vein material and fossil fragments.
7160	7910	Sandstone, light gray to gray, very fine grained to silty, calcareous, carbonaceous, interlaminated with silty gray shale; shale, gray to dark gray, silty, slightly calcareous with some calcite vein material and fossil fragments.
7910	8145	Shale, very dark gray to black, micaceous, very calcareous, with abundant light gray inclusions (speckled); interbedded with some limestone, brown to gray, coarsely crystalline, slightly micaceous, argillaceous; and trace dark gray, fine grained silty sandstone. --Top of <u>DAKOTA</u> @ 8145'--
8145	8375	Sandstone, gray, brown, white to light gray, very fine grained to fine grained and conglomeratic in parts, poorly sorted, cemented with abundant white clay, hard and tight; interbedded with some coal and some light gray micaceous clay shale. --Top of <u>MORRISON</u> @ 8375'--

Field Main Canyon

Sec. 28 T. 15 S. R. 23 E.

Page 3

Farm Main Canyon

Well No. 1

Company Mountain Fuel Supply

FORMATION RECORD

<u>From</u>	<u>To</u>	
8375	8985	Shale, purple, green, gray, variegated, soft, clayey with sandstone, white to light gray, fine to medium grained, calcareous in part, containing some chert; some siltstone, reddish brown and green, sandy, hard.

--Top of ENTRADA @ 8985'--

8985	9051	Sandstone, white to light gray, very fine to medium grained, very calcareous, unevenly bedded, hard and tight.
------	------	----------------------------------------------------------------------------------------------------------------

TOTAL DEPTH - 9051'

June 27, 1960

Mountain Fuel Supply Company
P. O. Box 1129
Rock Springs, Wyoming

Attention: J. T. Simon, Vice President

Gentlemen:

This is to acknowledge receipt of your notice of intention to drill Well No. Main Canyon # 1, which is to be located 1980 feet from the south line and 600 feet from the east line of Section 28, Township 15 South, Range 23 East, S1M, Uintah County, Utah.

Please be advised that insofar as this office is concerned approval to drill said well is hereby granted.

This approval terminates within 90 days if the above mentioned well has not been spudded in within said period.

Very truly yours,


OIL & GAS CONSERVATION COMMISSION

CLEON B. FEIGHT,
EXECUTIVE SECRETARY

CBF:avg

cc: Don F. Russell, Dist. Eng.
U. S. Geological Survey
Salt Lake City, Utah

Form 9-331a
(Feb. 1961)



(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Utah
Lease No. 00220
Unit Lease

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	XX
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Main Canyon Well No. 1 July 18, 1960

Well No. 1 is located 1980 ft. from NE line and 660 ft. from E line of sec. 26

C NE SE sec. 26 (1/4 Sec. and Sec. No.) 13E (Twp.) 23E (Range) S. 1. (Meridian)

Main Canyon area (Field) Utah (County or Subdivision) Utah (State or Territory)

The elevation of the derrick floor above sea level is ~~7709.81~~ 7709.81 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

The subject well was spudded on July 6, 1960. At a depth of 395', the following 13-3/8" surface casing was run into the well.

	<u>Net</u>	<u>Gross</u>
1 Cameron 12" ser. 500 slip-on casing head	1.33'	1.33'
1 pc. 13-3/8" OD 48# E-40 8rmd thd STAC casing	13.60'	13.89'
12 jts. 13-3/8" OD 48# E-40 8rmd thd STAC casing	351.85'	355.34'
1 Novco 13-3/8" guide shoe	1.17'	1.17'
	<u>367.95'</u>	<u>371.73'</u>

The above casing was landed at 360.45' KBM and cemented with 420 sacks regular cement. Good sand returns were obtained prior to and while mixing and displacing cement. Had about 30 barrels of cement slurry returned to surface. Pressure tested casing and BOP's to 500 psi for 15 minutes; pressure test held satisfactorily.

(Over)

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Mountain Fuel Supply Company

Address P. O. Box 1129
Rock Springs, Wyoming


By J. T. [Signature]
Title Vice President

09616 700

TEST #1: 313'-325', Mesaverde formation, tool open 1 hour, shut in 30 minutes.
Slight blow of air throughout test. Recovered 150' muddy water, not salty.
PRESS 649 psi, TEMP 174.9 psi, BHPT's 343-49 psi, PRESS 670 psi, TEMP 170.5 psi.

Currently drilling at a depth of 4420' in the Mesaverde formation, drilling a
7-7/8" hole.

Form 9-881a
(Feb. 1961)



(SUBMIT IN TRIPPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Utah
Lease No. 05220
Unit Lease

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....
NOTICE OF INTENTION TO ABANDON WELL.....	

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Main Canyon Well No. 1 July 26, 1960

Well No. 1 is located 1980 ft. from ~~XXX~~ [S] line and 660 ft. from [E] line of sec. 28

C NE SE sec. 28 15E 23E S. L.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Main Canyon Area Utah Utah
(Field) (County or Subdivision) (State or Territory)

The elevation of the ~~rock~~ ^{ground} above sea level is 7789.81 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

TEST #2: 4440'-4470', Mesaverde, tool open 1 hour, shut in 1/2 hour, fairly weak blow throughout test. Recovered 50' slightly gas cut mud. IBHSIP 783 psi, IHP 2161 psi, BHFP's 25-30 psi, FBHSIP 300 psi, FBHP 2161 psi.
TEST #3: 4546'-4711', Castlegate, tool open 1 hour, shut in 1/2 hour, slight blow when tool opened, dead in 25 minutes and remaining dead throughout test. Recovered 20' mud. IBHSIP 1622 psi, IHP 2170 psi, IF 25 psi, IF 42 psi, FBHSIP 90 psi, FBHP 2170 psi.

Drilling at a depth of 5647'.


I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Mountain Fuel Supply Company

Address P. O. Box 1129
Rock Springs, Wyoming

By [Signature]
Title Vice President

Form 9-331a
(Feb. 1961)



(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Utah
Lease No. 08220
Unit Lease

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	<input checked="" type="checkbox"/>
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Main Canyon Well No. 1 August 1, 1960

Well No. 1 is located 1980 ft. from ~~TOP~~ [S] line and 650 ft. from [E] line of sec. 26

C 26 SE sec. 26 15E 23E S. L.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Main Canyon area Uintah Utah
(Field) (County or Subdivision) (State or Territory)

The elevation of the ~~ground~~ derrick floor above sea level is 7789.61 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Drilling at a depth of 6483 feet.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Mountain Fuel Supply Company

Address P. O. Box 1129

Rock Springs, Wyoming


By J. T. Linton *by S. W.*

Title Vice President

INFORMATION CONTAINS FOR OFFICE OF STATE MINERAL SURVEY FOR
 UTAH OIL & GAS CONSERVATION COMMISSION

Budget Bureau No. 42-R358.4
 Approval expires 12-31-60.

Form 9-881a
 (Feb. 1961)



(SUBMIT IN TRIPLICATE)

UNITED STATES
 DEPARTMENT OF THE INTERIOR
 GEOLOGICAL SURVEY

Land Office Utah
 Lease No. 08220
 Unit Lease

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....		SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	<input checked="" type="checkbox"/>
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Main Canyon Well No. 1 August 10, 1960

Well No. 1 is located 1980 ft. from ~~XXXX~~ [S] line and 660 ft. from ~~XXXX~~ [E] line of sec. 28

C NE SE sec. 28 15S 23E S. L.
 (1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
 Main Canyon area Uintah Utah
 (Field) (County or Subdivision) (State or Territory)

The elevation of the ~~XXXXXXXXXX~~ ^{ground} above sea level is 7769.81 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

TEST #4: 7505'-7575', Muncos, tool open 1 hour, shut in 1/2 hour, gas to surface immediately. In five minutes gauged 186 Mcf, decreasing to 88 Mcf gas per day at end of test. Recovered 65' gas cut mud. ISIP 3570 psi, IH 3804 psi, IF 102 psi, FF 102 psi, FHSIP 2596 psi, FH 3737 psi.

Presently drilling at a depth of 7768'.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Mountain Fuel Supply Company


Address P. O. Box 1129

Rock Springs, Wyoming

By B. W. Cowell

Title Manager, Producing Division

Form 9-831a
(Feb. 1961)



(SUBMIT IN TRIPPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Utah
Lease No. 96220
Unit Lease

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	<input checked="" type="checkbox"/>
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Main Canyon Well No. 1 August 16, 1960

Well No. 1 is located 1900 ft. from ~~WEST~~ ^S line and 660 ft. from ~~WEST~~ ^E line of sec. 28

C NE SE sec. 28 156 23E S. L. M.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Main Canyon area Uintah Utah
(Field) (County or Subdivision) (State or Territory)

The elevation of the ~~surface~~ ^{ground} above sea level is 7789.81 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

IBT #5: 7984'-8044', Mancos formation, tool open 1 hour, shut in 1/2 hour, strong blow, dying to weak blow at end of test, no gas to surface. Recovered 70' slightly gas cut mud. IBSP 3952 psi, IBPIP 217 psi, IPP 131 psi, FFP 152 psi, FBPIP 173 psi, FPHP 3952 psi.

The subject well is presently cutting core No. 1 at a depth of 8342'. Cutting of core No. 1 commenced at a depth of 8321'.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.


Company Mountain Fuel Supply Company

Address P. O. Box 1129
Rock Springs, Wyoming

By B. W. Coyle

Title Manager, Producing Division

Form 9-381a
(Feb. 1961)



(SUBMIT IN TRIPPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Utah
Lease No. 08220
Unit Lease

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....		SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	<input checked="" type="checkbox"/>
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Main Canyon Well No. 1 August 23, 1960

Well No. 1 is located 1900 ft. from ^{NINT} S line and 600 ft. from ^E line of sec. 28

C NE SE sec. 28 15S 23E S. L. N.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Main Canyon area Utah Utah
(Field) (County or Subdivision) (State or Territory)

The elevation of the ~~surface~~^{ground} above sea level is 7769.5 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

BIT #5: 6264'-8380', Buckhorn, tool open 1 hour, shut in 1/2 hour, strong blow, steady, decreasing slightly during test, no gas to surface. Recovered 100' slightly gas cut mud. IBSIP 4255 psi, IBSIP 305 psi, BSIP's 132-132 psi, FBBSIP 196 psi, PWSIP 4255 psi.

The subject well is currently drilling in the Morrison formation and will be drilled to about 9000 feet as a test of the Morrison formation and into the top of the Entrada formation.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Mountain Fuel Supply Company


Address P. O. Box 1129

Rock Springs, Wyoming

By B. W. Craft

Title Manager, Producing Division

Form 9-381a
(Feb. 1961)



(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Utah
Lease No. 00220
Unit Lease

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....		SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	<input checked="" type="checkbox"/>
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Main Canyon Well No. 1 August 29, 1960

Well No. 1 is located 1980 ft. from SW line and 660 ft. from E line of sec. 26

C NE SE sec. 26 15S 23E S. L. M.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Main Canyon Utah Utah
(Field) (County or Subdivision) (State or Territory)

The elevation of the ground above sea level is 7789.8 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

IST #1: 8705'-8721' (Morrison), tool open 1 hour, shut in 1/2 hour, opened with air blow, decreasing to nearly dead at end of test. Recovered 30' green oil and gas cut mud, about 3% oil. ISIP 875 psi, IHIP 4410 psi, IF 23 psi, FF 23 psi, FBHSIP 197 psi, FHHP 4410 psi.

IST #2: 8725'-8840' (Morrison), tool open 1 hour, shut in 1/2 hour, opened with very weak blow for 3 minutes, then dying. Recovered 30' slightly gas cut mud. IBHSIP 347 psi, IHHP 4432 psi, IF 22 psi, FF 22 psi, FBHSIP 44 psi, FHHP 4410 psi.

Presently preparing to cut a core in the Entrada formation at a depth of 8900'. Sample top of the Entrada was encountered at 8965'.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.


Company Mountain Fuel Supply Company

Address P. O. Box 1129
Rock Springs, Wyoming

By [Signature]

Title Vice President

Form 9-881a
(Feb. 1961)



(SUBMIT IN TRIPPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Utah
Lease No. 08220
Unit Lease

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	XX
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Main Canyon Well No. 1 September 7 1960

Well No. 1 is located 1980 ft. from [S] line and 660 ft. from [E] line of sec. 26

C NE SE sec. 26 15E 23E S. L. M.
($\frac{1}{4}$ Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Main Canyon area Utah Utah
(Field) (County or Subdivision) (State or Territory)

The elevation of the ~~surface~~ ^{ground} above sea level is 7789.8 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

DST #9: 8982'-9051', Entrada formation, tool open 1 hour, shut in 30 minutes, no blow during test. Recovered 15' very slightly gas cut mud. IH 4590 psi, ISIP 105 psi, IF 42 psi, FF 42 psi, FBIP 42 psi, FH 4570 psi.

The subject well was drilled to a total depth of 9051' into the Entrada formation, top of which was picked by sample at 8965'. Ran electric logs and a production string of 5 1/2" OD casing as follows:

	Net	Gross
1 pc. 5 1/2" OD 17 1/2 lb N-80 8rmd thd LTRC casing	15.93'	16.22'
266 jts. 5 1/2" OD 17 1/2 lb N-80 8rmd thd LTRC casing	8448.08'	8525.95'
1 Baker 5 1/2" OD differential fillup collar	2.08'	2.37'
1 jt. 5 1/2" OD 17 1/2 lb N-80 8rmd thd LTRC casing	30.09'	30.38'
1 Baker 5 1/2" OD differential fillup shoe	2.33'	2.33'
(Over)	8498.51'	8577.05'

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Mountain Fuel Supply Company

Address P. O. Box 1129

Rock Springs, Wyoming

By [Signature]

Title Vice President

The 5½" OD casing was landed at 8511.01' KBM and cemented with 300 sacks 50-50 Pozmix A cement by Halliburton Oil Well Cementing Company. Good mud returns were obtained prior to and while mixing and displacing cement. A temperature survey located top of cement behind 5½" OD casing at 7195'.

Pressure tested blind runs and tubing runs and casing to 4000 psi; pressure test held good.

Using a jet gun, the Bushhorn formation was perforated with 4 shots per foot from 8354' to 8346' and from 8378' to 8361', KBM.


Rigged up Halliburton Oil Well Cementing Company and applied sandoil fracturing treatment to perforations. The treatment was applied in three stages, wherein a mixture of 9,000 gallons of No. 2 diesel oil, 0.05 pounds per gallon of FL-2, and 1 pound per gallon of 20-40 mesh round Ottawa sand, was pumped into the formation in each stage. Nylon ball sealers were injected into the well between each stage. Formation was broke down at 3350 psi with an average injection rate of 25 BPM.

<u>Stage</u>	<u>Average Inj. Rate BPM</u>	<u>Average Pressure Psi</u>
1	29	3350
2	29	3200
3	27	3150
Displacement	28	3550 maximum and final.

Pressure bled off to zero psi in 1 hour 51 minutes. Rigged up and ran a string of 2-3/8" OD 4.7# 8rod thd EUE tubing, landing tubing at 8318.81', KBM.

Now rigging up to seab tubing.

Form 9-581a
(Feb. 1961)



(SUBMIT IN TRIPPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Utah
Lease No. 06220
Unit L.

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....		SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	XX
NOTICE OF INTENTION TO ABANDON WELL.....	XX		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Main Canyon Well No. 1

September 9, 1960

Well No. 1 is located 1980 ft. from SW line and 660 ft. from E line of sec. 28

C NE SE sec. 28

15S

23E

S. B. M.

(1/4 Sec. and Sec. No.)

(Twp.)

(Range)

(Meridian)

Main Canyon area

Utah

Utah

(Field)

(County or Subdivision)

(State or Territory)

The elevation of the ~~drinking~~ ^{ground} above sea level is 7789.51 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Rigged up swabbing equipment and started swabbing well through tubing after sandoil fracturing treatment. Made 30 runs with swab, recovering a total of 118 barrels of diesel oil with no shows of gas or oil. On 31st run, diesel recoveries became water cut; continued swabbing for a total of 45 swab runs. Diesel oil recoveries between the 31st and 45th runs were cut with formation salt water from 25% to 75%. Tubing and casing pressure remained at zero psi throughout the entire swabbing operation. No indications of natural gas or crude oil during swabbing.

We would like permission to plug and abandon the subject well in view of the absence of commercial quantities of oil or gas in this well. We will load the hole with drilling mud and lay the following cement plugs:

(Over)

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Mountain Fuel Supply Company

Address P. O. Box 1129

Rock Springs, Wyoming

By [Signature]

Title Vice President

REPORT OF THE SUPERVISOR TO THE BOARD OF SUPERVISORS

No. 1: 35 sacks Pozmix cement, 8000' to 8403' in the 5½" OD casing.

We will then go in hole with a casing cutter and cut off and salvage as much of the 5½" OD casing as possible, and then continue laying cement plugs.

No. 2: 38 sacks Pozmix, which will extend 100' in and 100' out of the 5½" casing stub (cutoff point).

No. 3: 55 sacks, 4300' to 4700'


No. 4: 55 sacks, 3000' to 3200'

No. 5: 56 sacks, which will extend 50' inside and 50' outside of the 13-3/8" OD surface casing.

No. 6: 5 sacks into the top of the 13-3/8" surface casing into which will be inserted a regulation abandonment marker.

The above is in confirmation of our Mr. S. J. Fisher's telephone conversation of September 9, 1960, with Mr. D. F. Russell of the U. S. Geological Survey.

Form 9-531a
 (Feb. 1961)



(SUBMIT IN TRIPLICATE)

UNITED STATES
 DEPARTMENT OF THE INTERIOR
 GEOLOGICAL SURVEY

Land Office Utah
 Lease No. 08220
 Unit L.

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT..... XXX
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....
NOTICE OF INTENTION TO ABANDON WELL.....	

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Main Canyon Well No. 1 September 12, 1960

Well No. 1 is located 1980 ft. from $\begin{matrix} N \\ S \end{matrix}$ line and 660 ft. from $\begin{matrix} E \\ W \end{matrix}$ line of sec. 28

C NE SE sec. 28 158 23S S. L. M.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
 Main Canyon area Uintah Utah
(Field) (County or Subdivision) (State or Territory)

The elevation of the ~~surface~~ ^{ground} above sea level is 7789.81 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Using Homco equipment, the 5 1/2" OD casing was cut at 7130', KBM and a total of 7104.18' net, 7167.36' gross of 5 1/2" OD, 17#, N-80, 8rmd thd LHM casing was salvaged from the well. Prior to salvaging the casing, a 35-sack cement plug was laid in the 5 1/2" casing from 8403' to 8080'. The following cement plugs were laid in the well:

Plug No. 2: 35 sack Pozmix A cement, 7030'-7230', 100' in and 100' out of the 5 1/2" casing stub.

Plug No. 3: 55 sack Pozmix A cement, 4500'-4700'.

Plug No. 4: 55 sack Pozmix A cement, 3000'-3200'.

Plug No. 5: 56 sack Pozmix A cement, 435'-330', 50' in, and 50' out of the 13-3/8" OD surface casing.

Plug No. 6: 5 sack regular cement in top of 13-3/8" OD surface casing, into which was inserted the regulation pipe abandonment marker. The abandonment marker cap

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced. ((Over))

Company Mountain Fuel Supply Company

Address P. O. Box 1129

Rock Springs, Wyoming


By *Simon*

Title Vice President

is presently being prepared and will be taken to the location and screwed onto the regulation abandonment marker. As soon as the cap is placed on the marker and the location leveled and cleaned, your office will be notified.

Form 9-330

U. S. LAND OFFICE Utah
 SERIAL NUMBER 08220
 LEASE OR PERMIT TO PROSPECT L.

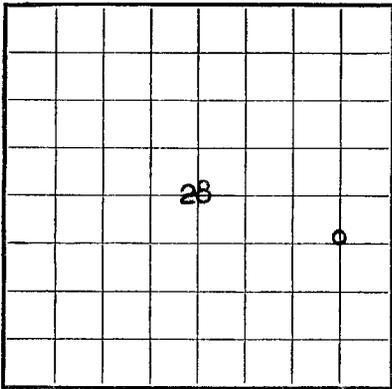

LOCATE WELL CORRECTLY

UNITED STATES
 DEPARTMENT OF THE INTERIOR
 GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company Mountain Fuel Supply Company Address P. O. Box 1129, Rock Springs, Wyoming
 Lessor or Tract Socony Mobil Oil Co., Inc. Field Main Canyon State Utah
 Well No. 1 Sec. 28 T. 15S R. 23E Meridian S. L. M. County Uintah
 Location 1980 ft. N. of S. Line and 660 ft. W. of E. Line of sec. 28 Elevation 7799.21
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed [Signature]

Date October 6, 1960 Title Vice President

The summary on this page is for the condition of the well at above date.

Commenced drilling July 6, 1960 Finished drilling August 30, 1960

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from _____ to _____ No. 4, from _____ to _____
 No. 2, from _____ to _____ No. 5, from _____ to _____
 No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
 No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From-	To-	
13-3/8	48	8rnd thd	Spang	371.73	Howco				surface
5-1/2	177	8rnd thd	Spang	2577.05	Baker	7161.00' KBW			Salvaged production string.

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
13-3/8	380.45	420	Displacement	with 58 barrels of water.	
*5-1/2	8511.01	300	Displacement	with water.	
*This casing cut and salvaged, recovering 7167.36' gross of casing.					

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
 Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from 0 feet to 9051 feet, and from _____ feet to _____ feet
 Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

September 10, 1960. Put to producing Plugged & abandoned, 19____

The production for the first 24 hours was _____ barrels of fluid of which _____% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, °Bé. _____

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

Hewit-Gulick Drilling Company EMPLOYEES


R. R. Finlayson, Driller R. K. Davis, Driller
C. A. Schoasow, Driller _____, Driller

FORMATION RECORD

FROM-	TO-	TOTAL FEET	FORMATION
			See attached formation record. (2) Electric logs enclosed.

FOLD MARK

Form 9-381a
(Feb. 1961)



(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Utah
Lease No. 0000
Unit Lease

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	XX
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Main Canyon Well No. 1 October 31, 1960

Well No. 1 is located 1960 ft. from XDXX line and 660 ft. from {E} line of sec. 26

C NE SE sec. 26 196 23E S. L. M.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Main Canyon Area Uintah Utah
(Field) (County or Subdivision) (State or Territory)

The elevation of the ~~surface~~ ground ~~floor~~ above sea level is 778.8 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

The subject location has been leveled and cleaned and is now ready for your inspection and final approval.

12877 \$
25848
169626

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Mountain Fuel Supply Company

Address P. O. Box 1129

Rock Springs, Wyoming

By [Signature]

Title Vice President