

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

5. Lease Serial No. UTU-72106	
6. If Indian, Allottee or Tribe Name NA	
7. If Unit or CA Agreement, Name and No. Beluga	
8. Lease Name and Well No. Beluga Federal D-18-9-17	
9. API Well No. 43013-34156	
10. Field and Pool, or Exploratory Monument Butte	11. Sec., T. R. M. or Blk. and Survey or Area Sec. 7, T9S R17E
12. County or Parish Duchesne	13. State UT
14. Distance in miles and direction from nearest town or post office* Approximately 17.4 miles southwest of Myton, UT	15. Distance from proposed* location to nearest property or lease line, ft. Approx. 20' f/lse, 1340' f/unit (Also to nearest drig. unit line, if any)
16. No. of acres in lease 1,188.92	17. Spacing Unit dedicated to this well 20 Acres
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1330'	19. Proposed Depth 5,905'
20. BLM/BIA Bond No. on file WYB000493	21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5379' GL
22. Approximate date work will start* 1st Qtr. 2009	23. Estimated duration (7) days from SPUD to rig release

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM. |

25. Signature <i>Mandie Crozier</i>	Name (Printed/Typed) Mandie Crozier	Date 11/24/08
Title Regulatory Specialist		
Approved by (Signature) <i>Bradley G. Hill</i>	Name (Printed/Typed) BRADLEY G. HILL	Date 12-22-08
Title Officer ENVIRONMENTAL MANAGER		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

Surf

580619X
4432449Y
40.040313
-110.055017


BAL

580808X
4432206Y
40.038104
-110.052830

**Federal Approval of this
Action is Necessary**

RECEIVED
DEC 11 2008
DIV. OF OIL, GAS & MINING


T9S, R17E, S.L.B.&M.

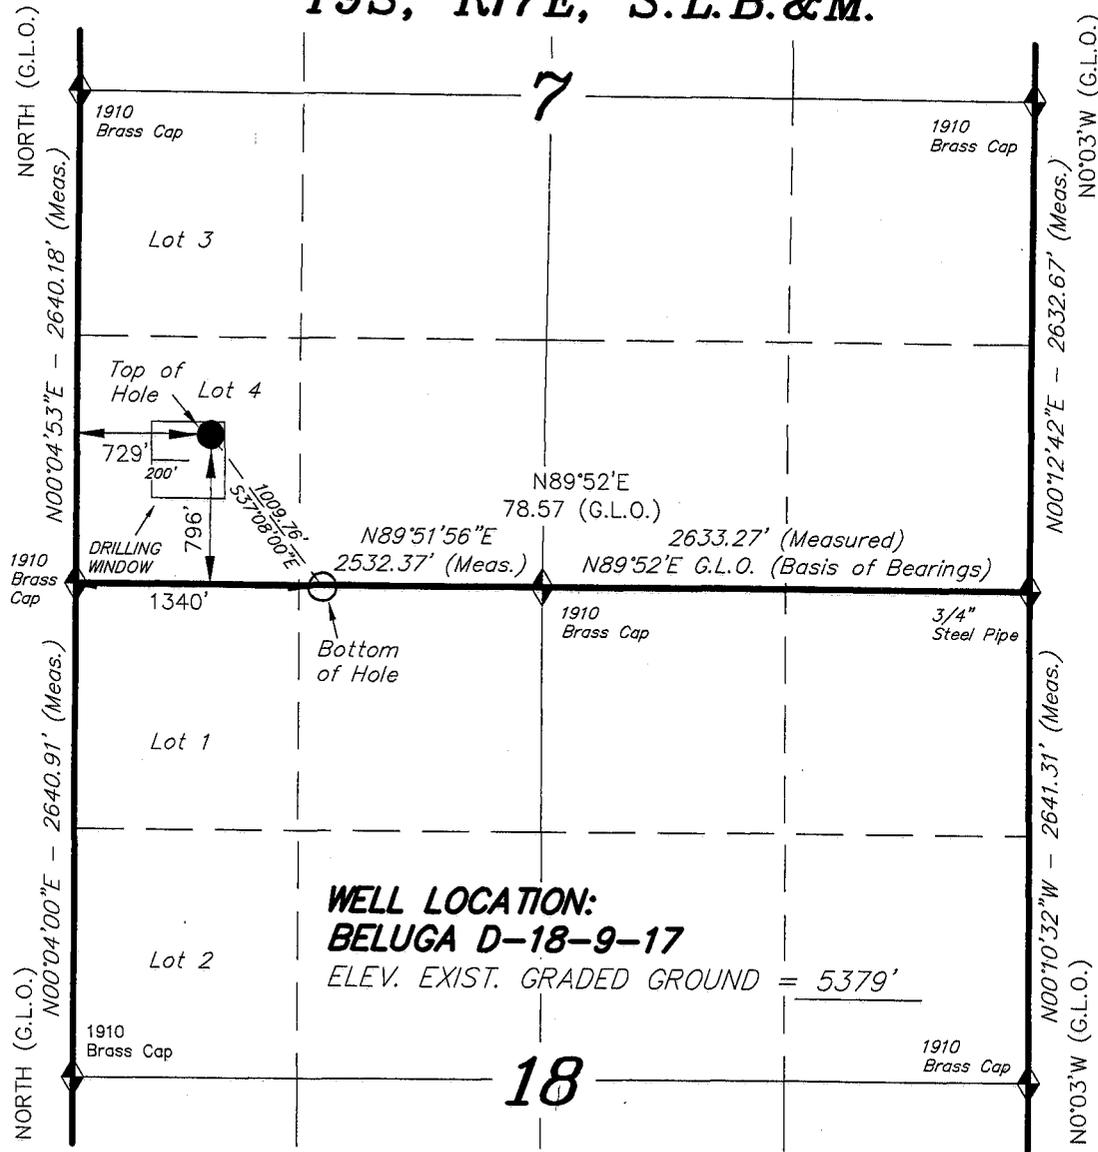

WELL LOCATION:
BELUGA D-18-9-17
 ELEV. EXIST. GRADED GROUND = 5379'


NEWFIELD PRODUCTION COMPANY

WELL LOCATION, BELUGA D-18-9-17,
 LOCATED AS SHOWN IN THE SW 1/4 SW
 1/4 (LOT 4) OF SECTION 7, T9S, R17E,
 S.L.B.&M. DUCHESNE COUNTY, UTAH.

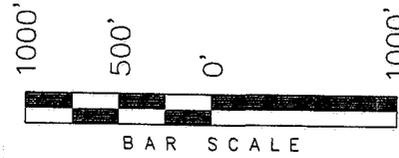

Note:
 1. The bottom of hole footages
 are 10' FNL & 1340' FWL.

THIS IS TO CERTIFY THAT THE ABOVE PLAN WAS
 PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS
 MADE BY ME OR UNDER MY SUPERVISION AND THAT
 THE SAME ARE TRUE AND CORRECT TO THE BEST OF
 MY KNOWLEDGE AND BELIEF. No. 189377

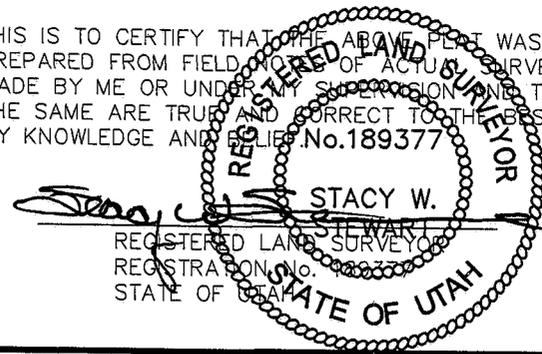

◆ = SECTION CORNERS LOCATED
 BASIS OF ELEV;
 U.S.G.S. 7-1/2 min QUAD (MYTON SE)

BELUGA D-18-9-17
 (Surface Location) NAD 83
 LATITUDE = 40° 02' 25.03"
 LONGITUDE = 110° 03' 20.66"

TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
 (435) 781-2501

DATE SURVEYED: 10-10-08	SURVEYED BY: T.C.
DATE DRAWN: 10-15-08	DRAWN BY: F.T.M.
REVISED:	SCALE: 1" = 1000'

NEWFIELD PRODUCTION COMPANY
BELUGA FEDERAL D-18-9-17
AT SURFACE: SW/SW (LOT #4) SECTION 7, T9S, R17E
DUCHESNE COUNTY, UTAH

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. GEOLOGIC SURFACE FORMATION:

Uinta formation of Upper Eocene Age

2. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:

Uinta	0' – 1331'
Green River	1331'
Wasatch	5905'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:

Green River Formation 1331' – 5905' - Oil

4. PROPOSED CASING PROGRAM

Please refer to the Monument Butte Field Standard Operation Procedure (SOP).

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

Please refer to the Monument Butte Field SOP. See Exhibit "C".

6. TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:

Please refer to the Monument Butte Field SOP.

7. AUXILIARY SAFETY EQUIPMENT TO BE USED:

Please refer to the Monument Butte Field SOP.

8. TESTING, LOGGING AND CORING PROGRAMS:

Please refer to the Monument Butte Field SOP.

9. ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:

The anticipated maximum bottom hole pressure is 1800 psi. It is not anticipated that abnormal temperatures will be encountered.

10. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:

Please refer to the Monument Butte Field SOP.

**NEWFIELD PRODUCTION COMPANY
BELUGA FEDERAL D-18-9-17
AT SURFACE: SW/SW (LOT #4) SECTION 7, T9S, R17E
DUCHESNE COUNTY, UTAH**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site Beluga Federal D-18-9-17 located in the SW 1/4 SW 1/4 Section 7, T9S, R17E, Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.4 miles \pm to the junction of this highway and UT State Hwy 53; proceed southeasterly - 11.5 miles \pm to it's junction with an existing dirt road to the southwest; proceed southwesterly - 3.3 miles \pm to it's junction with an existing dirt road to the north; proceed northerly - 0.8 miles \pm to it's junction with an existing road to the east; proceed in a northeasterly direction - 0.4 miles \pm to it's junction with the beginning of the access road to the existing Beluga 13-7-9-17 well lcoation.

2. PLANNED ACCESS ROAD

There is no proposed access road for this location. The proposed well will be drilled directionally off of the existing Beluga 13-7-9-17 well pad. See attached **Topographic Map "B"**.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

The proposed well will be drilled directionally off of the Beluga 13-7-9-17 well pad. There will be a pumping unit and a short flow line added to the tank battery for the proposed Beluga Federal D-18-9-17. All permanent surface equipment will be painted Carlsbad Canyon.

Please refer to the Monument Butte Field Standard Operating Procedure (SOP).

5. LOCATION AND TYPE OF WATER SUPPLY

Newfield Production will transport water by truck for drilling purposes from the following water sources:

Johnson Water District
Water Right : 43-7478

Neil Moon Pond
Water Right: 43-11787

Maurice Harvey Pond
Water Right: 47-1358

Newfield Collector Well

Water Right: 41-3530 (A30414DV, contracted with the Duchesne County Conservancy District).

Please refer to the Monument Butte Field SOP. See Exhibit "A".

6. **SOURCE OF CONSTRUCTION MATERIALS**

The proposed Beluga Federal D-18-9-17 will be drilled off of the existing Beluga 13-7-9-17 well pad. No additional surface disturbance will be required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

Please refer to the Monument Butte Field SOP.

8. **ANCILLARY FACILITIES**

Please refer to the Monument Butte Field SOP.

9. **WELL SITE LAYOUT**

See attached Location Layout Diagram.

10. **PLANS FOR RESTORATION OF SURFACE**

Please refer to the Monument Butte Field SOP.

11. **SURFACE OWNERSHIP** - Bureau Of Land Management (Proposed location and access roads leading to).

12. **OTHER ADDITIONAL INFORMATION**

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. MOAC Report #01-03, 1/17/01. Paleontological Resource Survey prepared by, Wade E. Miller, 1/6/01. See attached report cover pages, Exhibit "D".

Water Disposal

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), State of Utah approved surface disposal facilities, or Federally approved surface disposal facilities.

Threatened, Endangered, And Other Sensitive Species

None for the proposed Beluga Federal D-18-9-17.

Reserve Pit Liner

A 16 mil liner with felt is required. Please refer to the Monument Butte Field SOP.

Location and Reserve Pit Reclamation

Please refer to the Monument Butte Field SOP.

The following seed mixture will be used on the topsoil stockpile, to the recontoured surface of the reserve pit, and for final reclamation: (All poundages are in pure live seed)

Squirrell Tail	<i>Elymus Elymoides</i>	6 lbs/acre
----------------	-------------------------	------------

Siberian Wheatgrass	<i>Agropyron Fragile</i>	2 lbs/acre
Gardner Saltbush	<i>Atriplex Gardneri</i>	1 lbs/acre
Shadscale	<i>Atriplex Confertifolia</i>	1 lbs/acre
Fourwing Saltbush	<i>Atriplex Canescens</i>	1 lbs/acre
Scarlet Globemallow	<i>Sphaeralcea Conccinea</i>	0.20 lbs/acre

Details of the On-Site Inspection

The proposed Beluga Federal D-18-9-17 was on-sited on 8/22/08. The following were present; Dave Allred (Newfield Production), Tim Eaton (Newfield Production), Dave Gordon (Bureau of Land Management), and James Herford (Bureau of Land Management). Weather conditions were clear and ground cover was 100% open.

LESSEE'S OR OPERATORS REPRESENTATIVE AND CERTIFICATION

Representative

Name: Dave Allred
Address: Route #3 Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification

Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #D-18-9-17 SW/SW Section 7, Township 9S, Range 17E: Lease UTU-72106 Duchesne County, Utah; and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #WYB000493.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

11/22/08

Date




Mandie Crozier
Regulatory Specialist
Newfield Production Company

NEWFIELD



Newfield Production Company

Project: Monument Butte
Site: Beluga D-18-9-17
Well: Beluga D-18-9-17
Wellbore: Wellbore #1
Design: Design #1

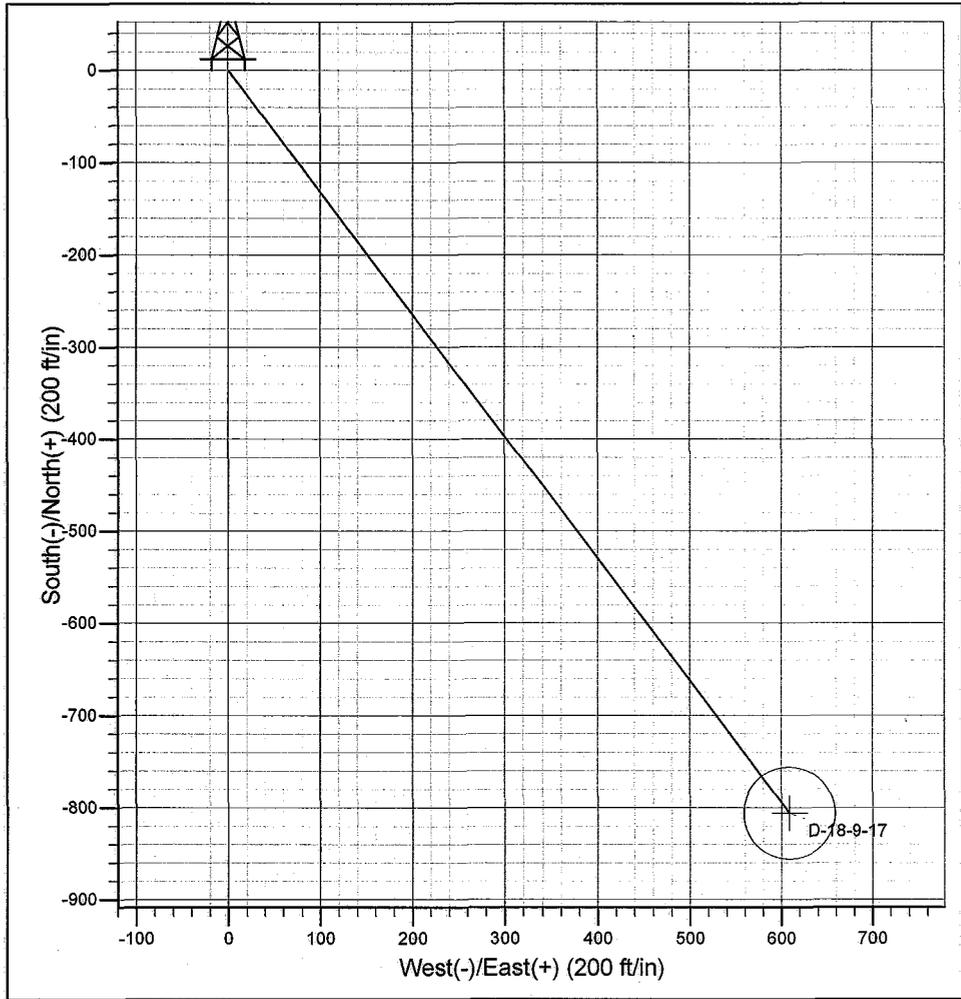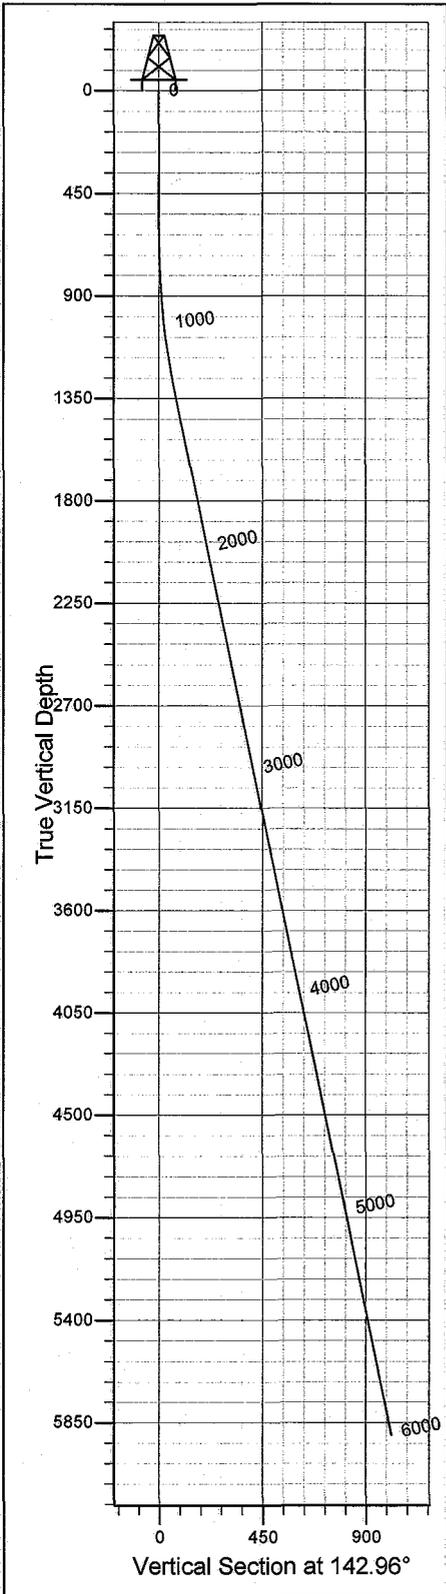

SECTION DETAILS										
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1373.7	11.61	142.96	1368.4	-62.3	47.0	1.50	142.96	78.1	
4	6005.0	11.61	142.96	5905.0	-806.0	608.3	0.00	0.00	1009.8	D-18-9-17

PROJECT DETAILS: Monument Butte
 Geodetic System: US State Plane 1983
 Datum: North American Datum 1983
 Ellipsoid: GRS 1980
 Zone: Utah Central Zone
 System Datum: Mean Sea Level

Azimuths to True North
 Magnetic North: 11.62°
 Magnetic Field
 Strength: 52550.1snT
 Dip Angle: 65.86°
 Date: 11/21/2008
 Model: IGRF200510

Created by: Hans Wychgram
Date: 11-20-2008



Database: EDM 2003.21 Single User Db
Company: Newfield Production Company
Project: Monument Butte
Site: Beluga D-18-9-17
Well: Beluga D-18-9-17
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well Beluga D-18-9-17
TVD Reference: RKB @ 5391.0ft (NDSI #2)
MD Reference: RKB @ 5391.0ft (NDSI #2)
North Reference: True
Survey Calculation Method: Minimum Curvature

Project	Monument Butte		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		

Site	Beluga D-18-9-17				
Site Position:		Northing:	2,190,499.10 m	Latitude:	40° 2' 25.030 N
From:	Lat/Long	Easting:	623,241.48 m	Longitude:	110° 3' 20.660 W
Position Uncertainty:	0.0 ft	Slot Radius:	in	Grid Convergence:	0.93 °

Well	Beluga D-18-9-17					
Well Position	+N/-S	0.0 ft	Northing:	2,190,499.10 m	Latitude:	40° 2' 25.030 N
	+E/-W	0.0 ft	Easting:	623,241.48 m	Longitude:	110° 3' 20.660 W
Position Uncertainty		0.0 ft	Wellhead Elevation:	ft	Ground Level:	5,379.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	11/21/2008	11.62	65.86	52,550

Design	Design #1				
Audit Notes:					
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0	
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
	0.0	0.0	0.0	142.96	

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,373.7	11.61	142.96	1,368.4	-62.3	47.0	1.50	1.50	0.00	142.96	
6,005.0	11.61	142.96	5,905.0	-806.0	608.3	0.00	0.00	0.00	0.00	D-18-9-17



Database: EDM 2003.21 Single User Db
Company: Newfield Production Company
Project: Monument Butte
Site: Beluga D-18-9-17
Well: Beluga D-18-9-17
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well Beluga D-18-9-17
TVD Reference: RKB @ 5391.0ft (NDSI #2)
MD Reference: RKB @ 5391.0ft (NDSI #2)
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	1.50	142.96	700.0	-1.0	0.8	1.3	1.50	1.50	0.00
800.0	3.00	142.96	799.9	-4.2	3.2	5.2	1.50	1.50	0.00
900.0	4.50	142.96	899.7	-9.4	7.1	11.8	1.50	1.50	0.00
1,000.0	6.00	142.96	999.3	-16.7	12.6	20.9	1.50	1.50	0.00
1,100.0	7.50	142.96	1,098.6	-26.1	19.7	32.7	1.50	1.50	0.00
1,200.0	9.00	142.96	1,197.5	-37.5	28.3	47.0	1.50	1.50	0.00
1,300.0	10.50	142.96	1,296.1	-51.1	38.5	64.0	1.50	1.50	0.00
1,373.7	11.61	142.96	1,368.4	-62.3	47.0	78.1	1.50	1.50	0.00
1,400.0	11.61	142.96	1,394.2	-66.6	50.2	83.4	0.00	0.00	0.00
1,500.0	11.61	142.96	1,492.1	-82.6	62.3	103.5	0.00	0.00	0.00
1,600.0	11.61	142.96	1,590.1	-98.7	74.5	123.6	0.00	0.00	0.00
1,700.0	11.61	142.96	1,688.0	-114.7	86.6	143.7	0.00	0.00	0.00
1,800.0	11.61	142.96	1,786.0	-130.8	98.7	163.8	0.00	0.00	0.00
1,900.0	11.61	142.96	1,884.0	-146.8	110.8	184.0	0.00	0.00	0.00
2,000.0	11.61	142.96	1,981.9	-162.9	122.9	204.1	0.00	0.00	0.00
2,100.0	11.61	142.96	2,079.9	-179.0	135.1	224.2	0.00	0.00	0.00
2,200.0	11.61	142.96	2,177.8	-195.0	147.2	244.3	0.00	0.00	0.00
2,300.0	11.61	142.96	2,275.8	-211.1	159.3	264.4	0.00	0.00	0.00
2,400.0	11.61	142.96	2,373.7	-227.1	171.4	284.6	0.00	0.00	0.00
2,500.0	11.61	142.96	2,471.7	-243.2	183.5	304.7	0.00	0.00	0.00
2,600.0	11.61	142.96	2,569.7	-259.2	195.6	324.8	0.00	0.00	0.00
2,700.0	11.61	142.96	2,667.6	-275.3	207.8	344.9	0.00	0.00	0.00
2,800.0	11.61	142.96	2,765.6	-291.4	219.9	365.0	0.00	0.00	0.00
2,900.0	11.61	142.96	2,863.5	-307.4	232.0	385.1	0.00	0.00	0.00
3,000.0	11.61	142.96	2,961.5	-323.5	244.1	405.3	0.00	0.00	0.00
3,100.0	11.61	142.96	3,059.4	-339.5	256.2	425.4	0.00	0.00	0.00
3,200.0	11.61	142.96	3,157.4	-355.6	268.3	445.5	0.00	0.00	0.00
3,300.0	11.61	142.96	3,255.3	-371.7	280.5	465.6	0.00	0.00	0.00
3,400.0	11.61	142.96	3,353.3	-387.7	292.6	485.7	0.00	0.00	0.00
3,500.0	11.61	142.96	3,451.3	-403.8	304.7	505.8	0.00	0.00	0.00
3,600.0	11.61	142.96	3,549.2	-419.8	316.8	526.0	0.00	0.00	0.00
3,700.0	11.61	142.96	3,647.2	-435.9	328.9	546.1	0.00	0.00	0.00
3,800.0	11.61	142.96	3,745.1	-451.9	341.1	566.2	0.00	0.00	0.00
3,900.0	11.61	142.96	3,843.1	-468.0	353.2	586.3	0.00	0.00	0.00
4,000.0	11.61	142.96	3,941.0	-484.1	365.3	606.4	0.00	0.00	0.00
4,100.0	11.61	142.96	4,039.0	-500.1	377.4	626.5	0.00	0.00	0.00
4,200.0	11.61	142.96	4,136.9	-516.2	389.5	646.7	0.00	0.00	0.00
4,300.0	11.61	142.96	4,234.9	-532.2	401.6	666.8	0.00	0.00	0.00
4,400.0	11.61	142.96	4,332.9	-548.3	413.8	686.9	0.00	0.00	0.00
4,500.0	11.61	142.96	4,430.8	-564.3	425.9	707.0	0.00	0.00	0.00
4,600.0	11.61	142.96	4,528.8	-580.4	438.0	727.1	0.00	0.00	0.00
4,700.0	11.61	142.96	4,626.7	-596.5	450.1	747.2	0.00	0.00	0.00
4,800.0	11.61	142.96	4,724.7	-612.5	462.2	767.4	0.00	0.00	0.00
4,900.0	11.61	142.96	4,822.6	-628.6	474.4	787.5	0.00	0.00	0.00
5,000.0	11.61	142.96	4,920.6	-644.6	486.5	807.6	0.00	0.00	0.00
5,100.0	11.61	142.96	5,018.5	-660.7	498.6	827.7	0.00	0.00	0.00
5,200.0	11.61	142.96	5,116.5	-676.7	510.7	847.8	0.00	0.00	0.00

Database: EDM 2003.21 Single User Db
Company: Newfield Production Company
Project: Monument Butte
Site: Beluga D-18-9-17
Well: Beluga D-18-9-17
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well Beluga D-18-9-17
TVD Reference: RKB @ 5391.0ft (NDSI #2)
MD Reference: RKB @ 5391.0ft (NDSI #2)
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,300.0	11.61	142.96	5,214.5	-692.8	522.8	867.9	0.00	0.00	0.00
5,400.0	11.61	142.96	5,312.4	-708.9	534.9	888.1	0.00	0.00	0.00
5,500.0	11.61	142.96	5,410.4	-724.9	547.1	908.2	0.00	0.00	0.00
5,600.0	11.61	142.96	5,508.3	-741.0	559.2	928.3	0.00	0.00	0.00
5,700.0	11.61	142.96	5,606.3	-757.0	571.3	948.4	0.00	0.00	0.00
5,800.0	11.61	142.96	5,704.2	-773.1	583.4	968.5	0.00	0.00	0.00
5,900.0	11.61	142.96	5,802.2	-789.2	595.5	988.6	0.00	0.00	0.00
6,000.0	11.61	142.96	5,900.1	-805.2	607.7	1,008.8	0.00	0.00	0.00
6,005.0	11.61	142.96	5,905.0	-806.0	608.3	1,009.8	0.00	0.00	0.00



NEWFIELD PRODUCTION COMPANY

WELL PAD INTERFERENCE PLAT

BELUGA D-18-9-17 (Proposed Well)

BELUGA 13-7-9-17 (Existing Well)

Pad Location: SWSW Section 7, T9S, R17E, S.L.B.&M.

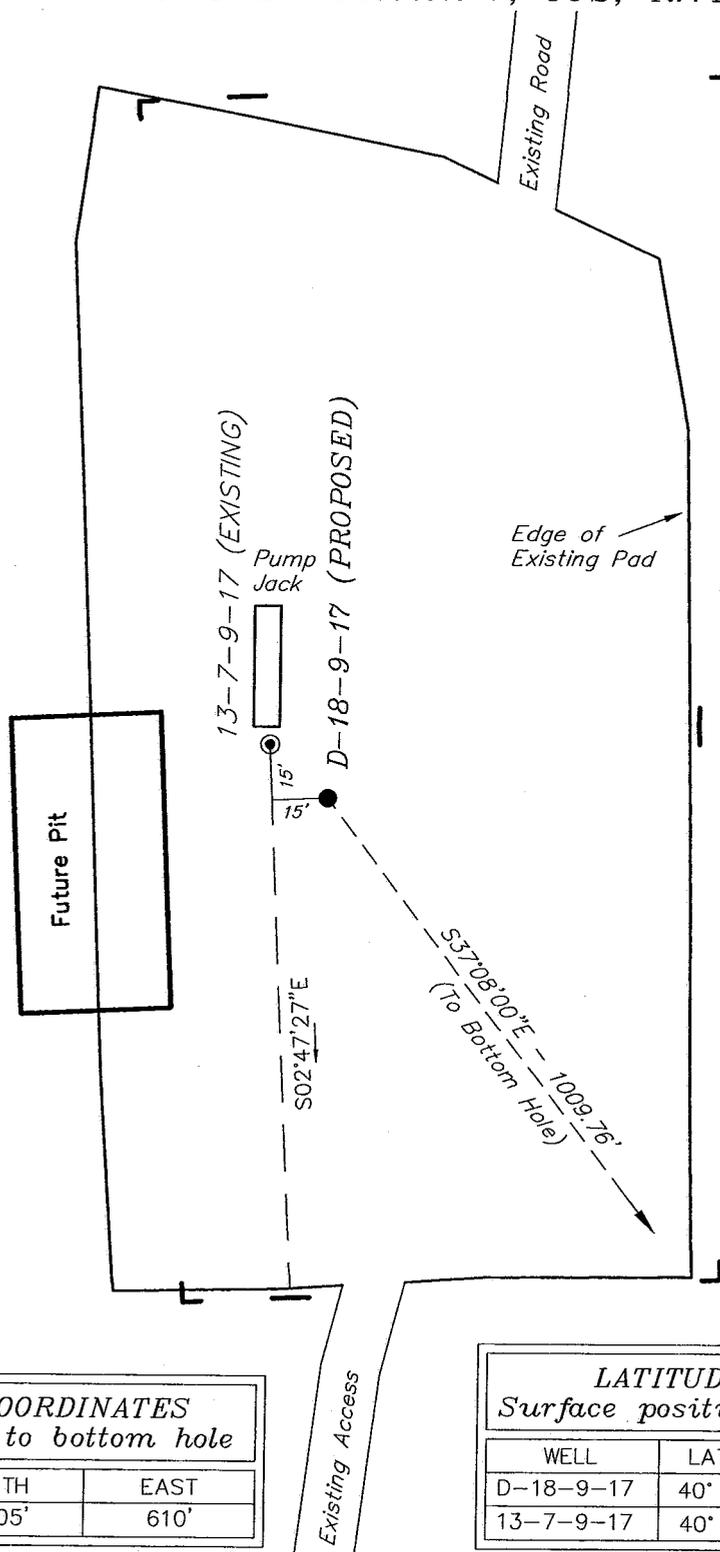

TOP HOLE FOOTAGES

D-18-9-17 (PROPOSED)
796' FSL & 729' FWL

BOTTOM HOLE FOOTAGES

D-18-9-17 (PROPOSED)
10' FNL & 1340' FWL

Note:

Bearings are based on GLO Information.

<i>RELATIVE COORDINATES</i>		
<i>From top hole to bottom hole</i>		
WELL	NORTH	EAST
D-18-9-17	-805'	610'

<i>LATITUDE & LONGITUDE</i>		
<i>Surface position of Wells (NAD 83)</i>		
WELL	LATITUDE	LONGITUDE
D-18-9-17	40° 02' 25.03"	110° 03' 20.66"
13-7-9-17	40° 02' 25.17"	110° 03' 20.86"

SURVEYED BY: T.C.	DATE SURVEYED: 10-14-08
DRAWN BY: F.T.M.	DATE DRAWN: 10-15-08
SCALE: 1" = 50'	REVISED:

(435) 781-2501

Tri State
Land Surveying, Inc.


180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD PRODUCTION COMPANY

BELUGA D-18-9-17 (Proposed Well)

BELUGA 13-7-9-17 (Existing Well)

Pad Location: SWSW Section 7, T9S, R17E, S.L.B.&M.

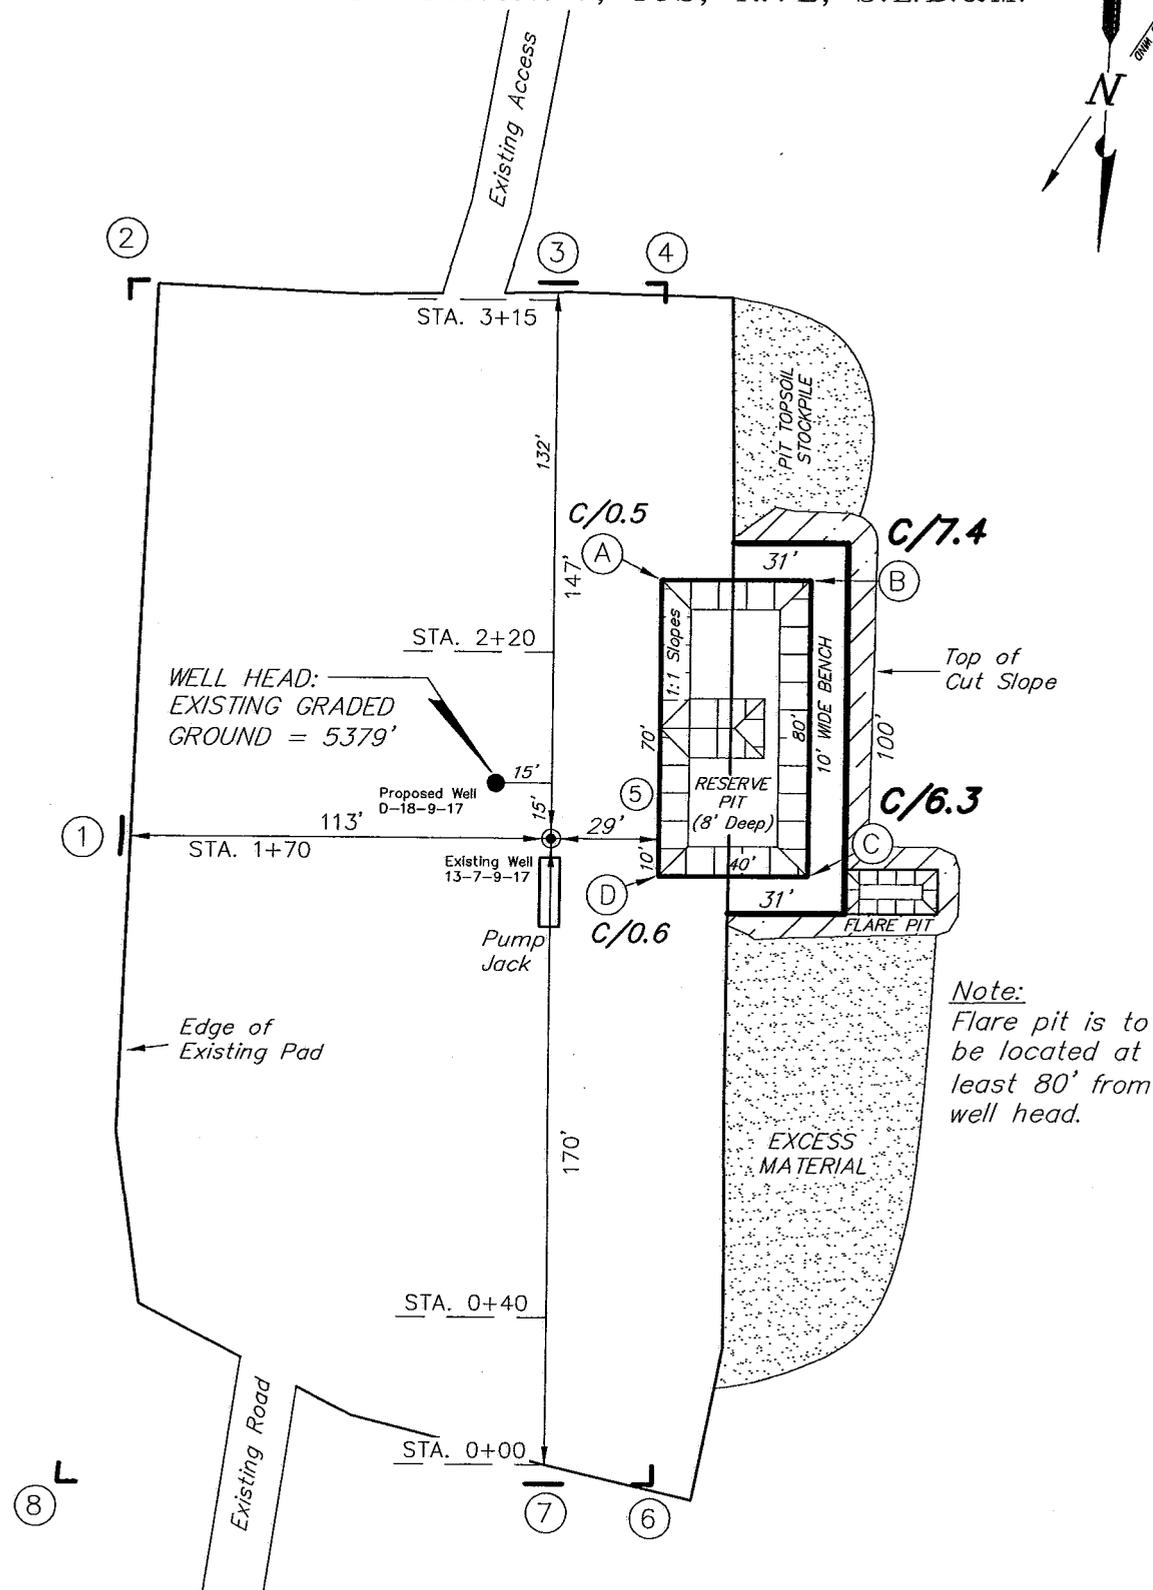

SURVEYED BY: T.C.	DATE SURVEYED: 10-13-08
DRAWN BY: F.T.M.	DATE DRAWN: 10-15-08
SCALE: 1" = 50'	REVISED:

(435) 781-2501

Tri State
Land Surveying, Inc.





180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD PRODUCTION COMPANY

CROSS SECTIONS

BELUGA D-18-9-17 (Proposed Well)

BELUGA 13-7-9-17 (Existing Well)

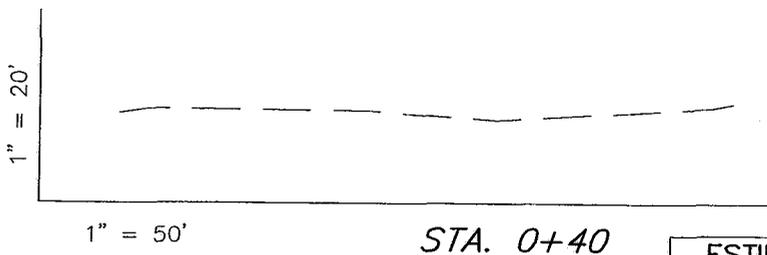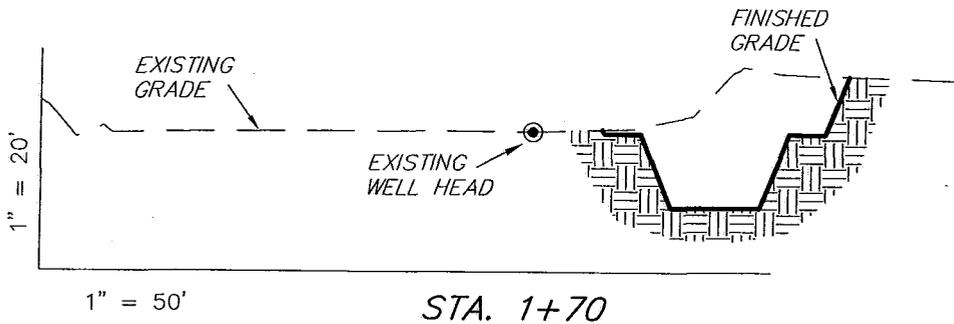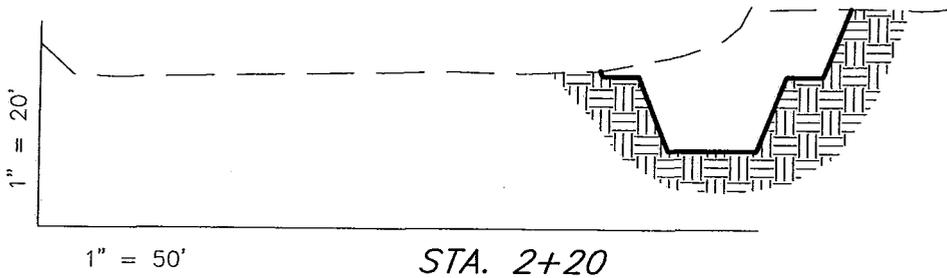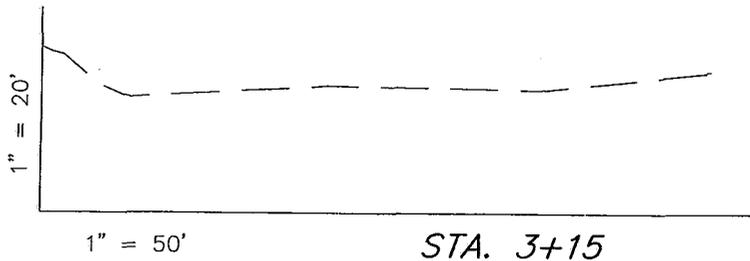

NOTE:
UNLESS OTHERWISE NOTED
CUT SLOPES ARE AT 1:1
FILL SLOPES ARE AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES (No Shrink or swell adjustments have been used) (Expressed in Cubic Yards)				
ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	1,160	0	Topsoil is not included in Pad Cut	1,160
PIT	640	0		640
TOTALS	1,800	0	150	1,800

SURVEYED BY: T.C.	DATE SURVEYED: 10-13-08	
DRAWN BY: F.T.M.	DATE DRAWN: 10-15-08	
SCALE: 1" = 50'	REVISED:	


Tri State
 Land Surveying, Inc. (435) 781-2501
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD PRODUCTION COMPANY

TYPICAL RIG LAYOUT

BELUGA D-18-9-17 (Proposed Well)

BELUGA 13-7-9-17 (Existing Well)

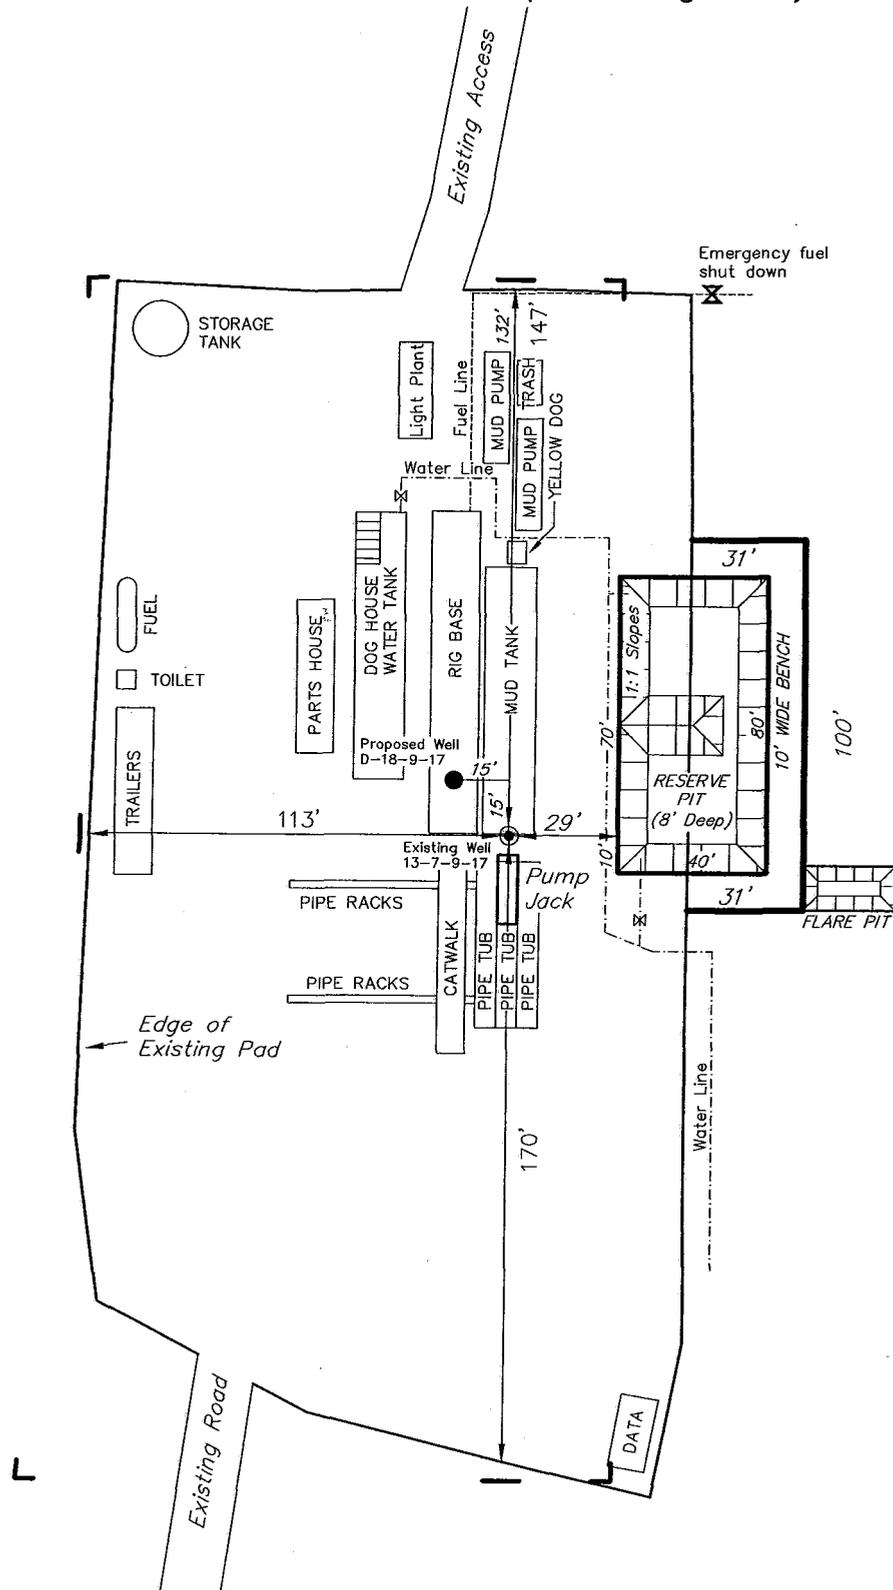

Note:
Flare pit is to be located at least 80' from well head.

SURVEYED BY: T.C.	DATE SURVEYED: 10-13-08
DRAWN BY: F.T.M.	DATE DRAWN: 10-15-08
SCALE: 1" = 50'	REVISED:

Tri State (435) 781-2501
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

Newfield Production Company Proposed Site Facility Diagram


Beluga Federal D-18-9-17


From the 13-7-9-17 Location

SW/SW Sec. 7 T9S, R17E


Duchesne County, Utah

UTU-72106

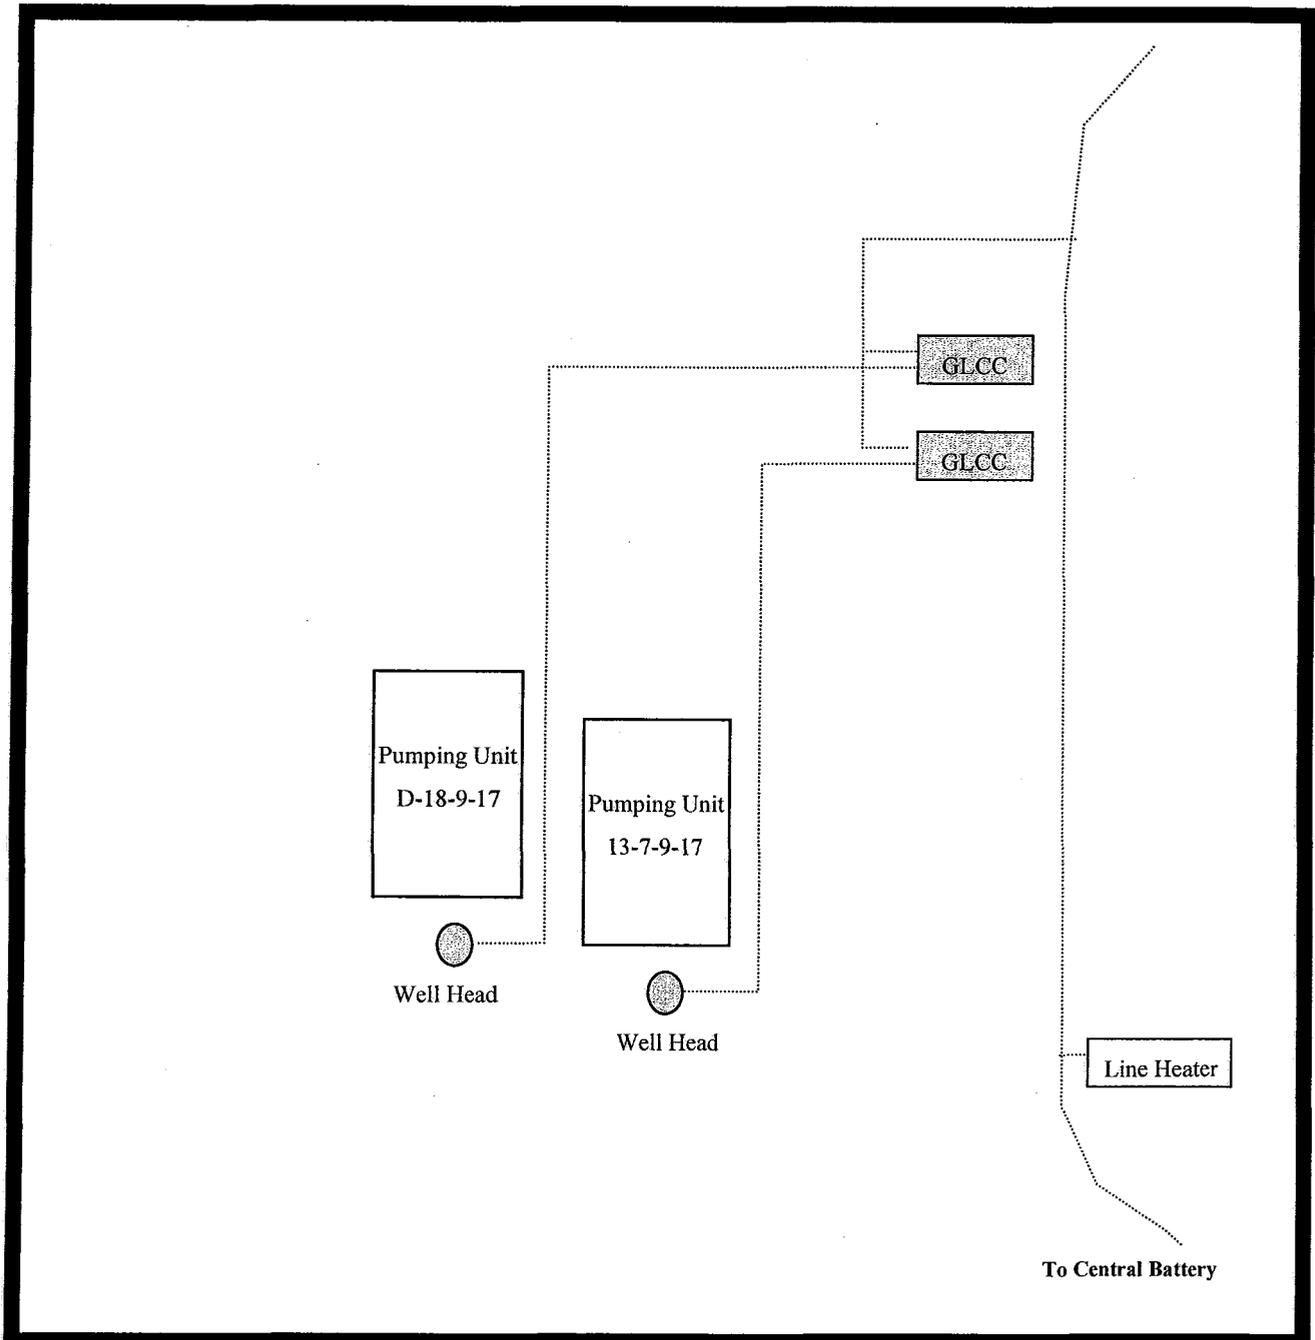

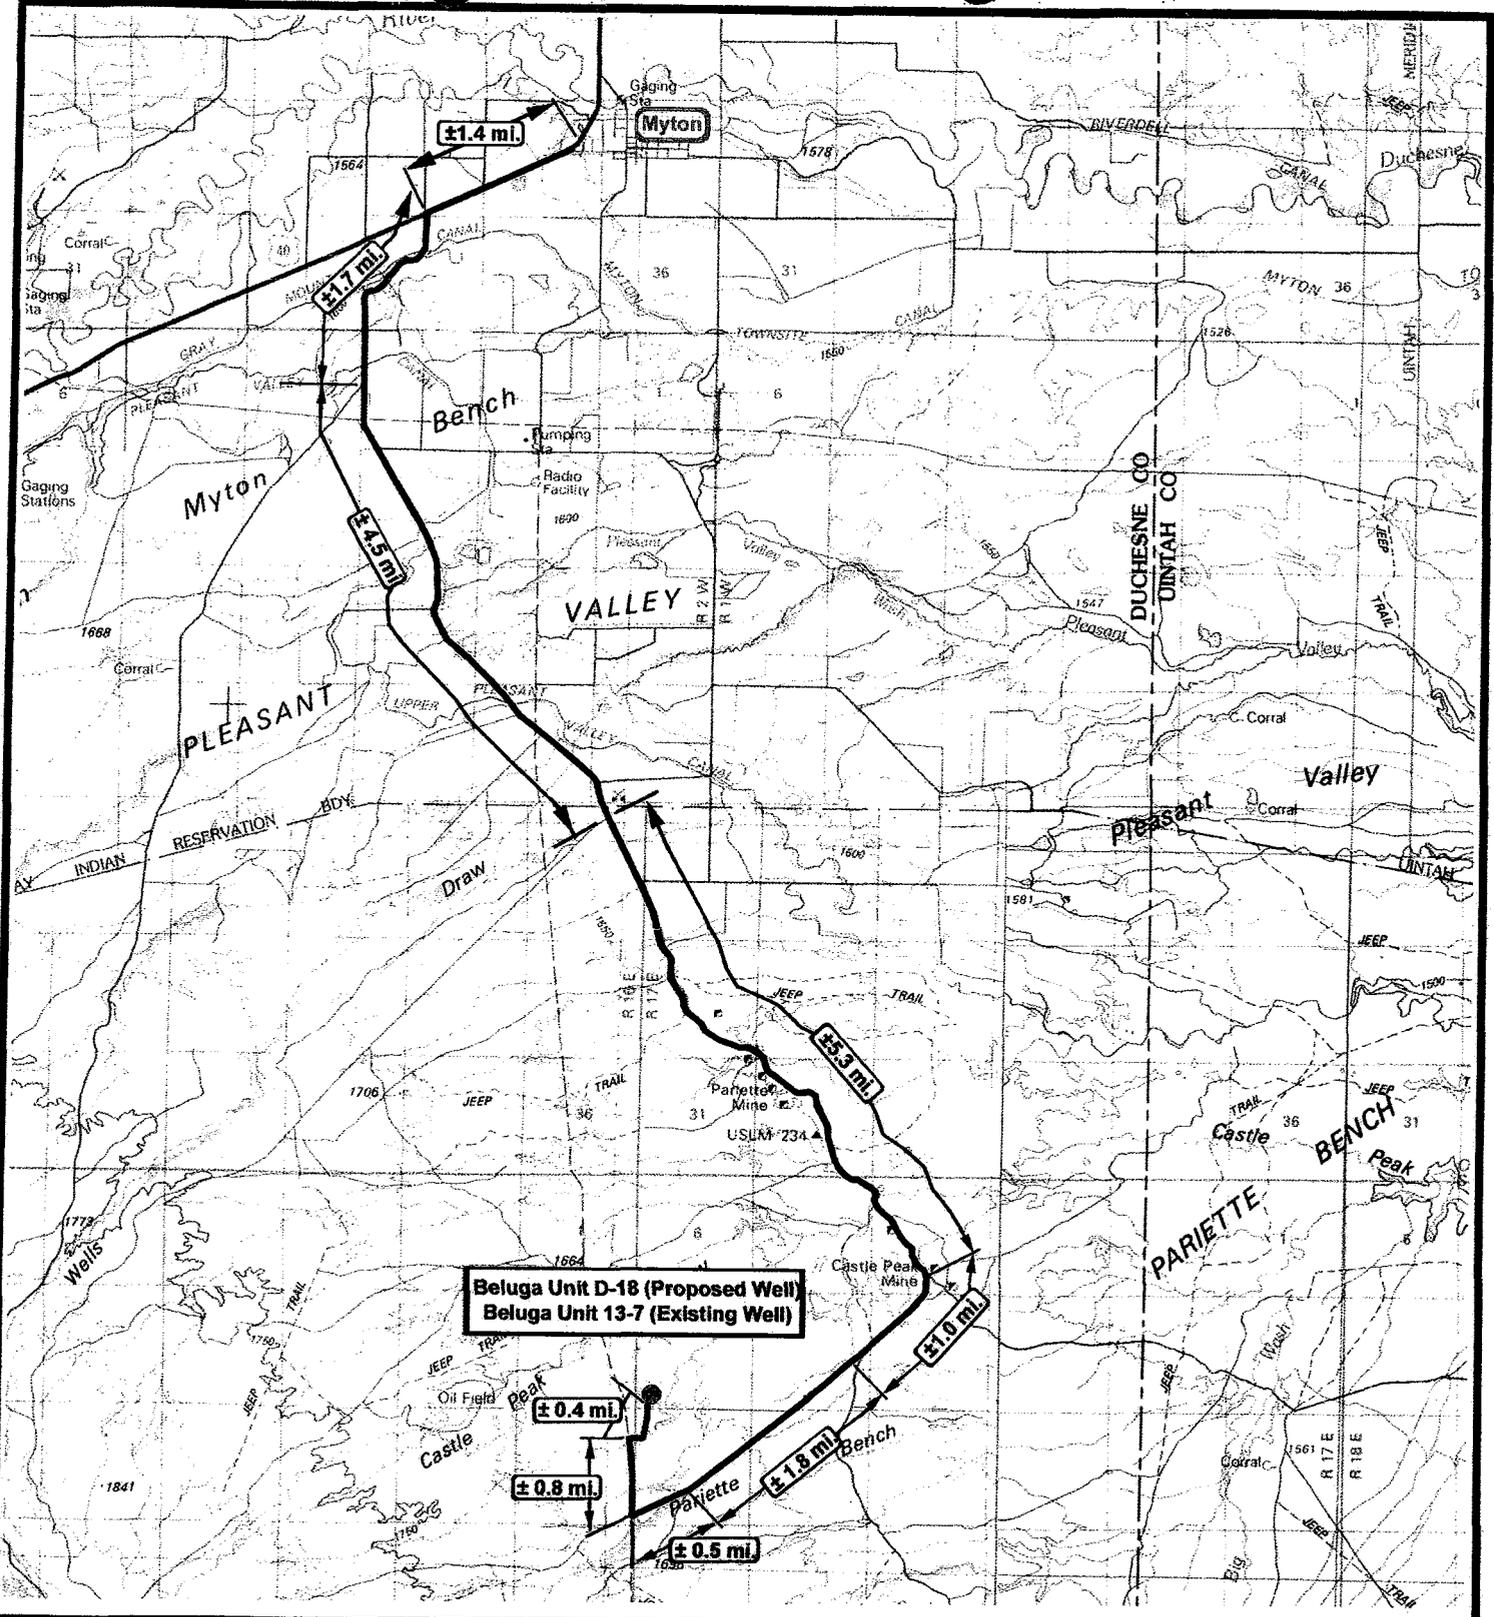

Beluga Unit D-18 (Proposed Well)
Beluga Unit 13-7 (Existing Well)



NEWFIELD
Exploration Company

Beluga Unit D-18-9-17 (Proposed Well)
Beluga Unit 13-7-9-17 (Existing Well)
 Pad Location: SWSW SEC. 7, T9S, R17E, S.L.B.&M.




Tri-State
Land Surveying Inc.
 (435) 781-2501
 180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1:100,000
 DRAWN BY: JAS.
 DATE: 10-16-2008


Legend

- Existing Road
- Proposed Access

TOPOGRAPHIC MAP
"A"

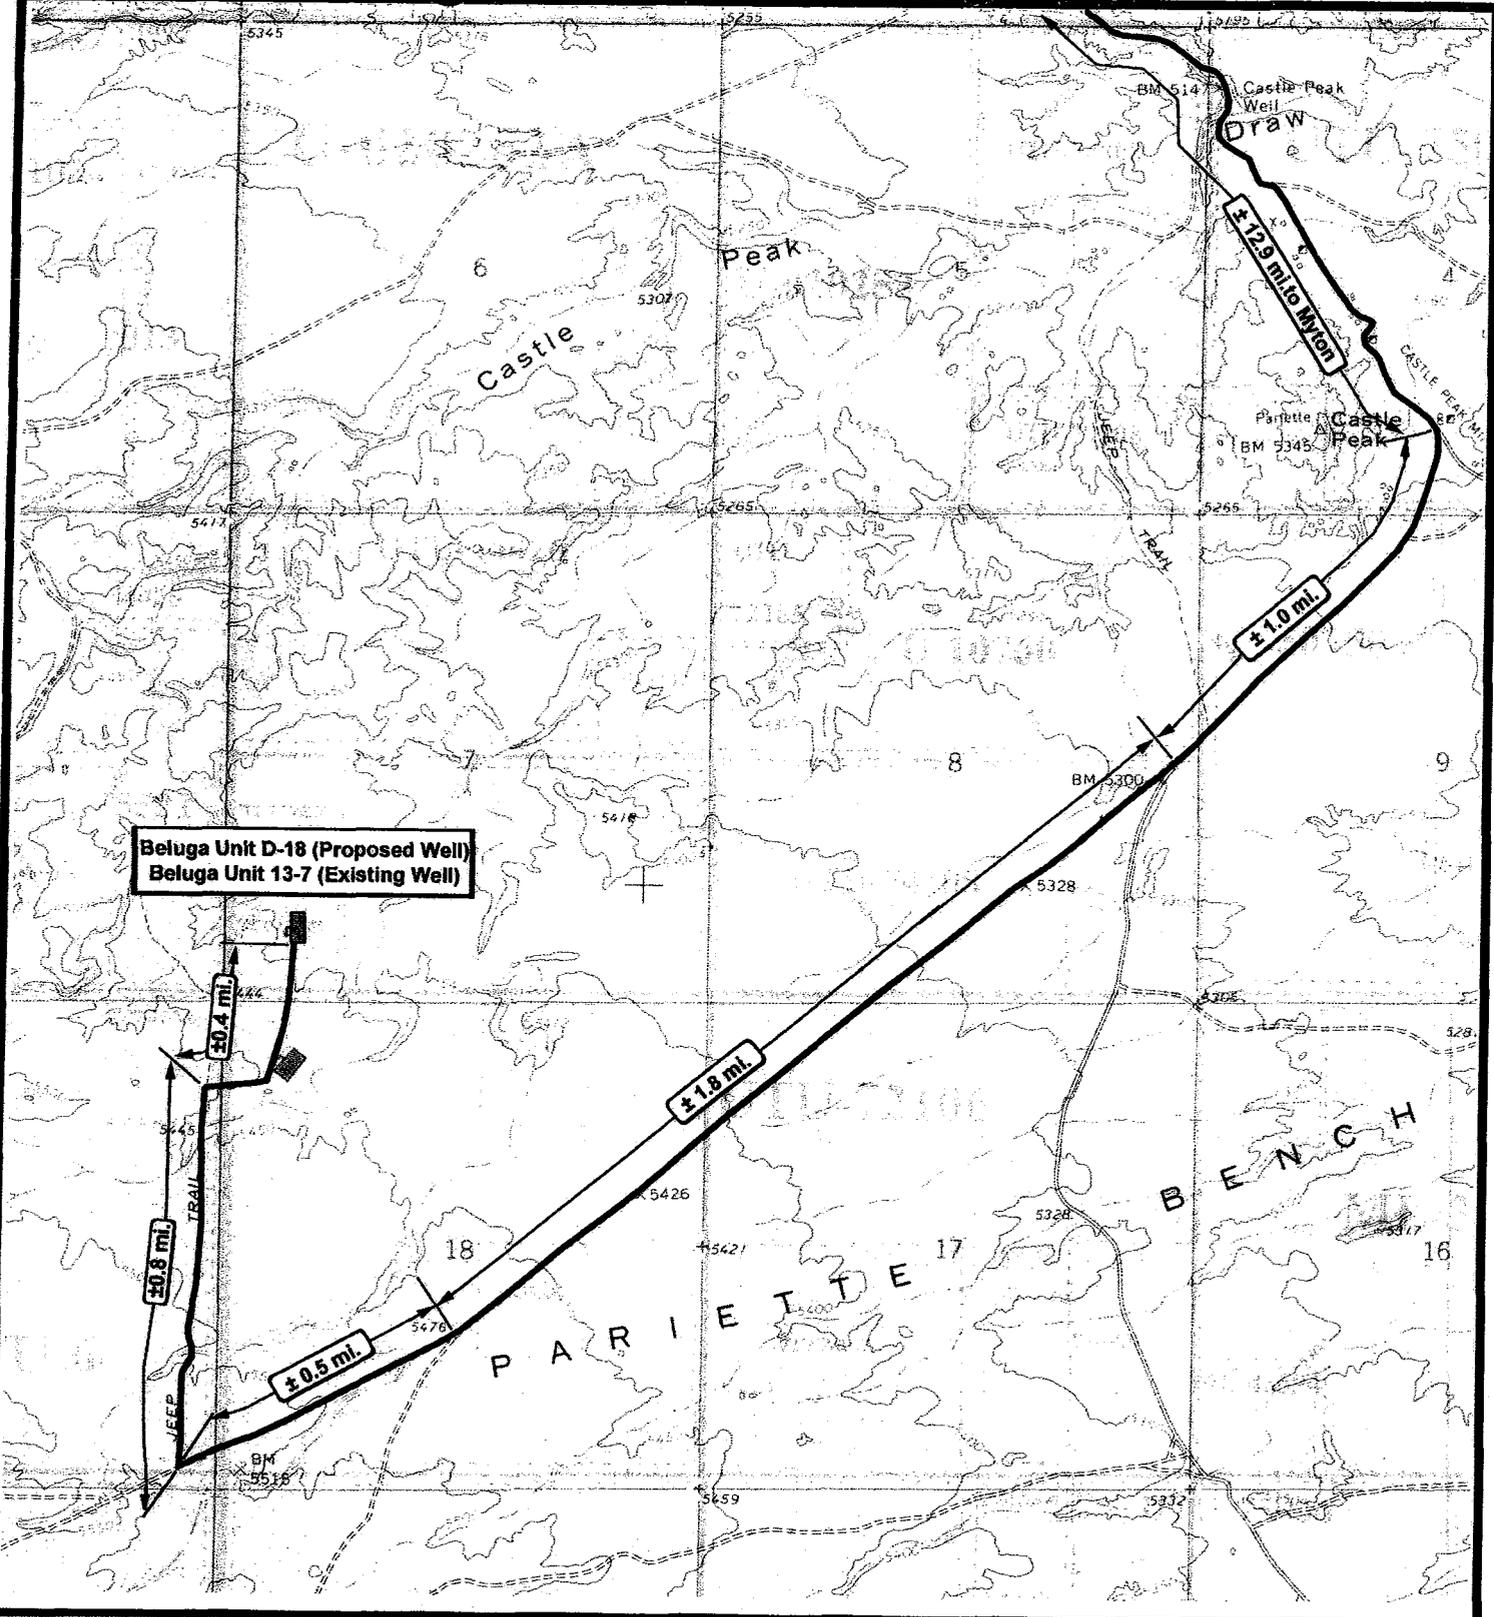

Beluga Unit D-18 (Proposed Well)
Beluga Unit 13-7 (Existing Well)



NEWFIELD
 Exploration Company

Beluga Unit D-18-9-17 (Proposed Well)
Beluga Unit 13-7-9-17 (Existing Well)
 Pad Location: SWSW SEC. 7, T9S, R17E, S.L.B.&M.




Tri-State
 Land Surveying Inc.
 (435) 781-2501
 180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2000'
 DRAWN BY: JAS
 DATE: 10-16-2008

Legend

Existing Road

TOPOGRAPHIC MAP
"B"

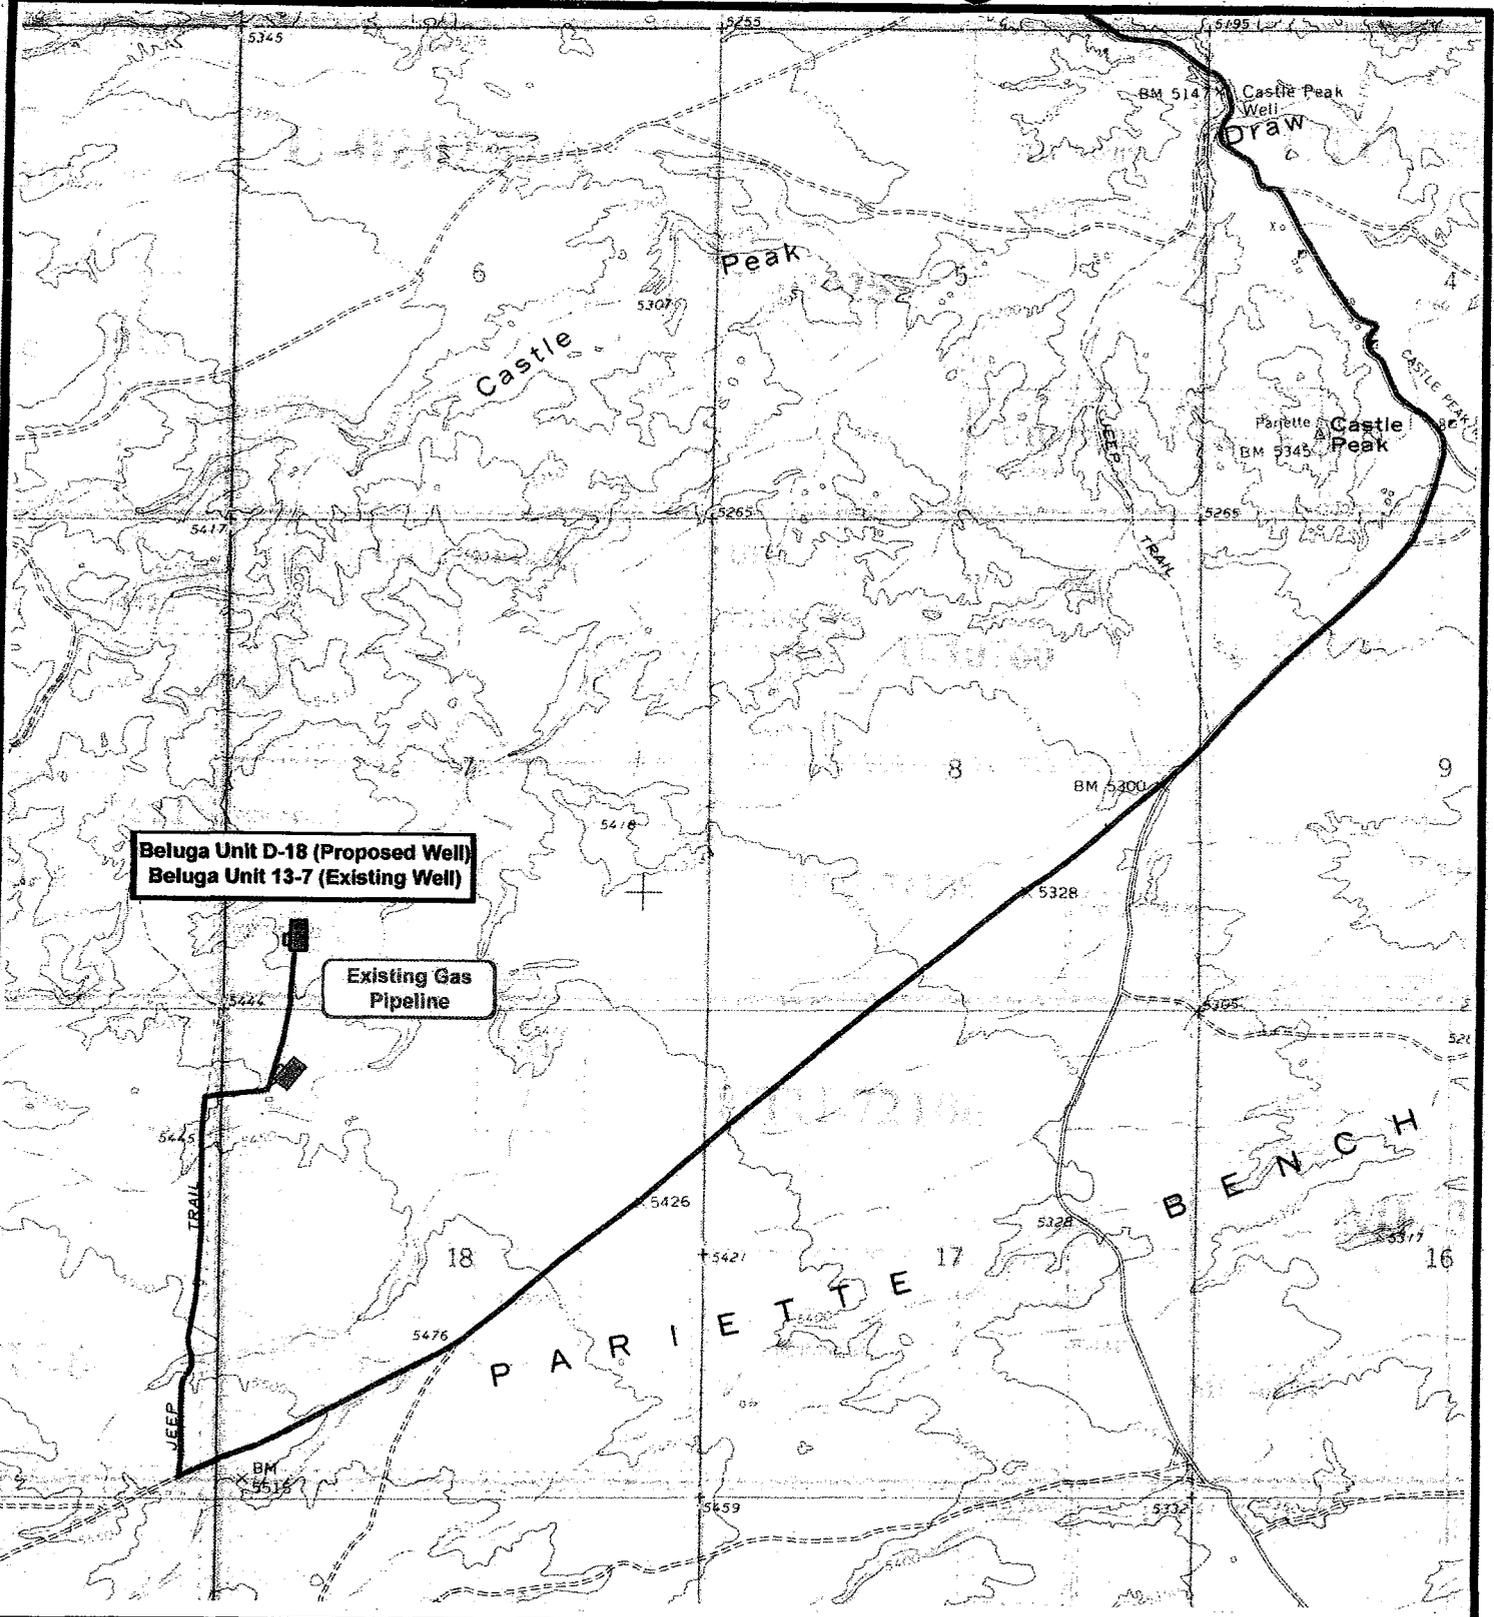

Beluga Unit D-18 (Proposed Well)
Beluga Unit 13-7 (Existing Well)

Existing Gas Pipeline



NEWFIELD
 Exploration Company

Beluga Unit D-18-9-17 (Proposed Well)
Beluga Unit 13-7-9-17 (Existing Well)
 Pad Location: SWSW SEC. 7, T9S, R17E, S.L.B.&M.




Tri-State
 Land Surveying Inc.
 (435) 781-2501
 180 North Vernal Ave. Vernal, Utah 84078


SCALE: 1" = 2000'
 DRAWN BY: JAS
 DATE: 10-16-2008

Legend

— Roads


TOPOGRAPHIC MAP

"C"

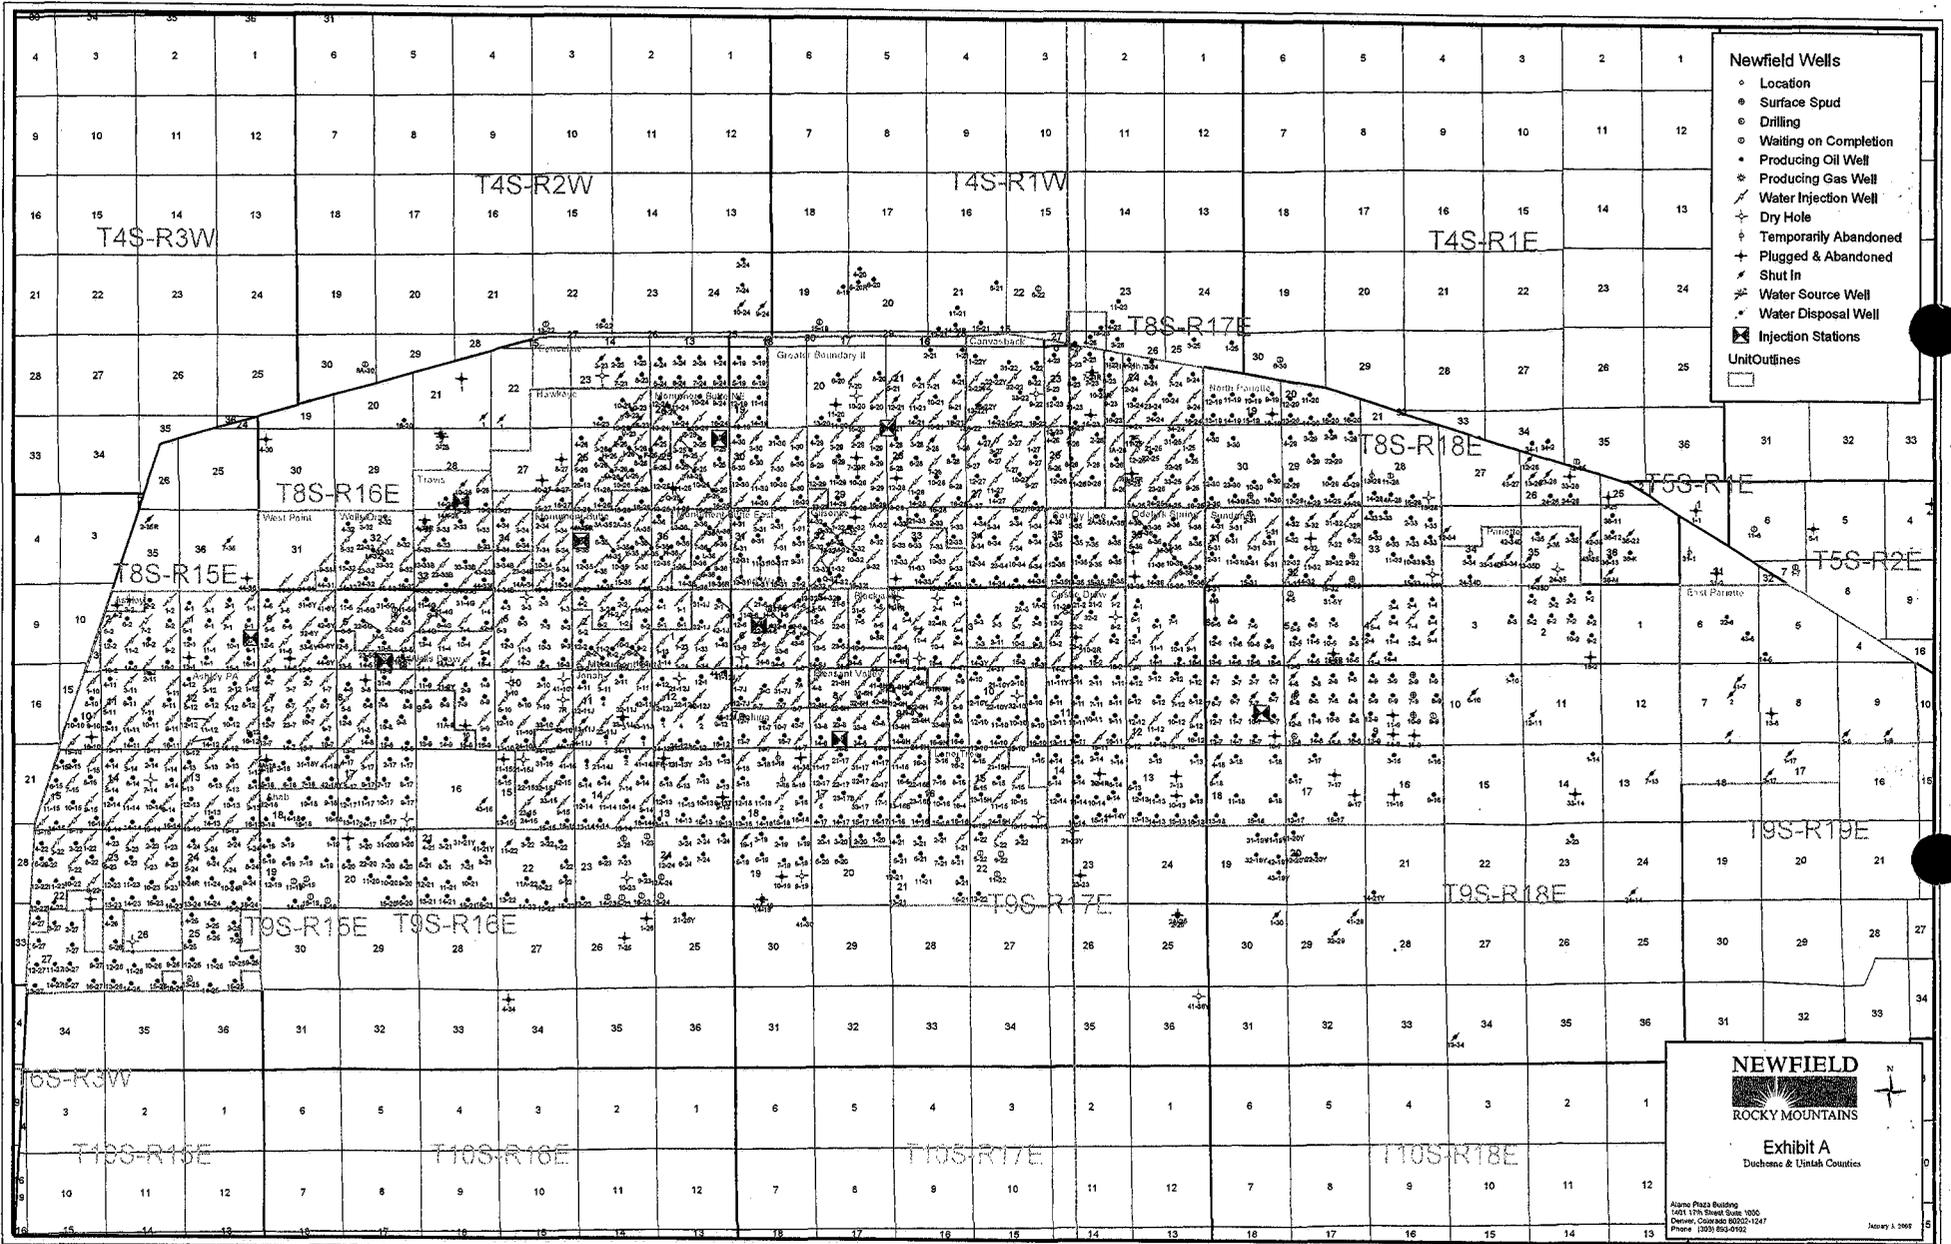

NEWFIELD
 ROCKY MOUNTAINS
 Exhibit A
 Duchesne & Uintah Counties

Alamo Plaza Building
 1451 17th Street Suite 1000
 Denver, Colorado 80202-1247
 Phone: (303) 852-9100

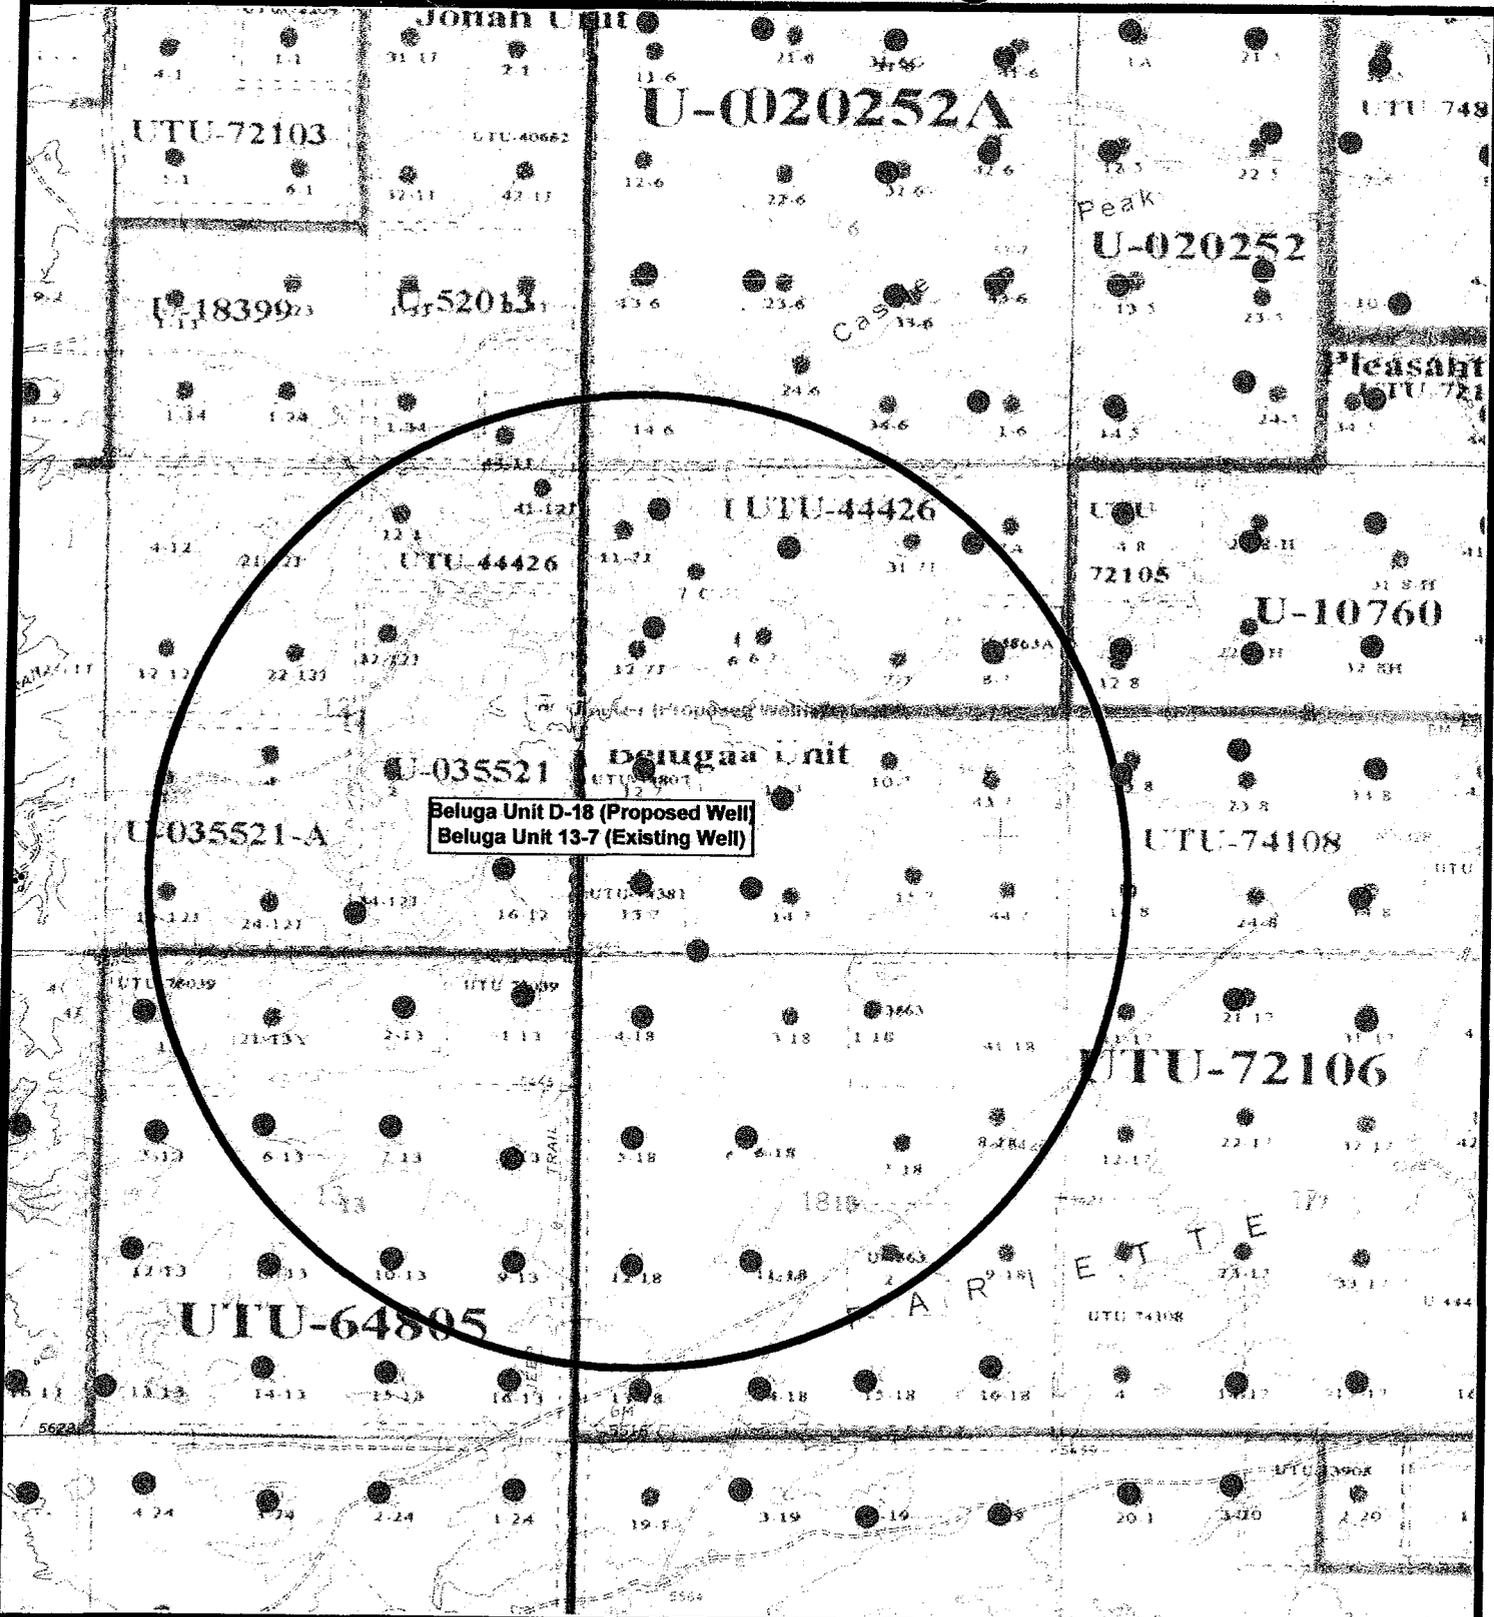

Beluga Unit D-18 (Proposed Well)
Beluga Unit 13-7 (Existing Well)



NEWFIELD
Exploration Company

Beluga Unit D-18-9-17 (Proposed Well)
Beluga Unit 13-7-9-17 (Existing Well)
 Pad Location: SWSW SEC. 7, T9S, R17E, S.L.B.&M.




Tri-State
Land Surveying Inc.
 (435) 781-2501
 180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'
 DRAWN BY: JAS
 DATE: 10-16-2008

Legend

- Pad Location
- Bottom Hole Location
- One-Mile Radius

Exhibit "B"

2-M SYSTEM

Blowout Prevention Equipment Systems

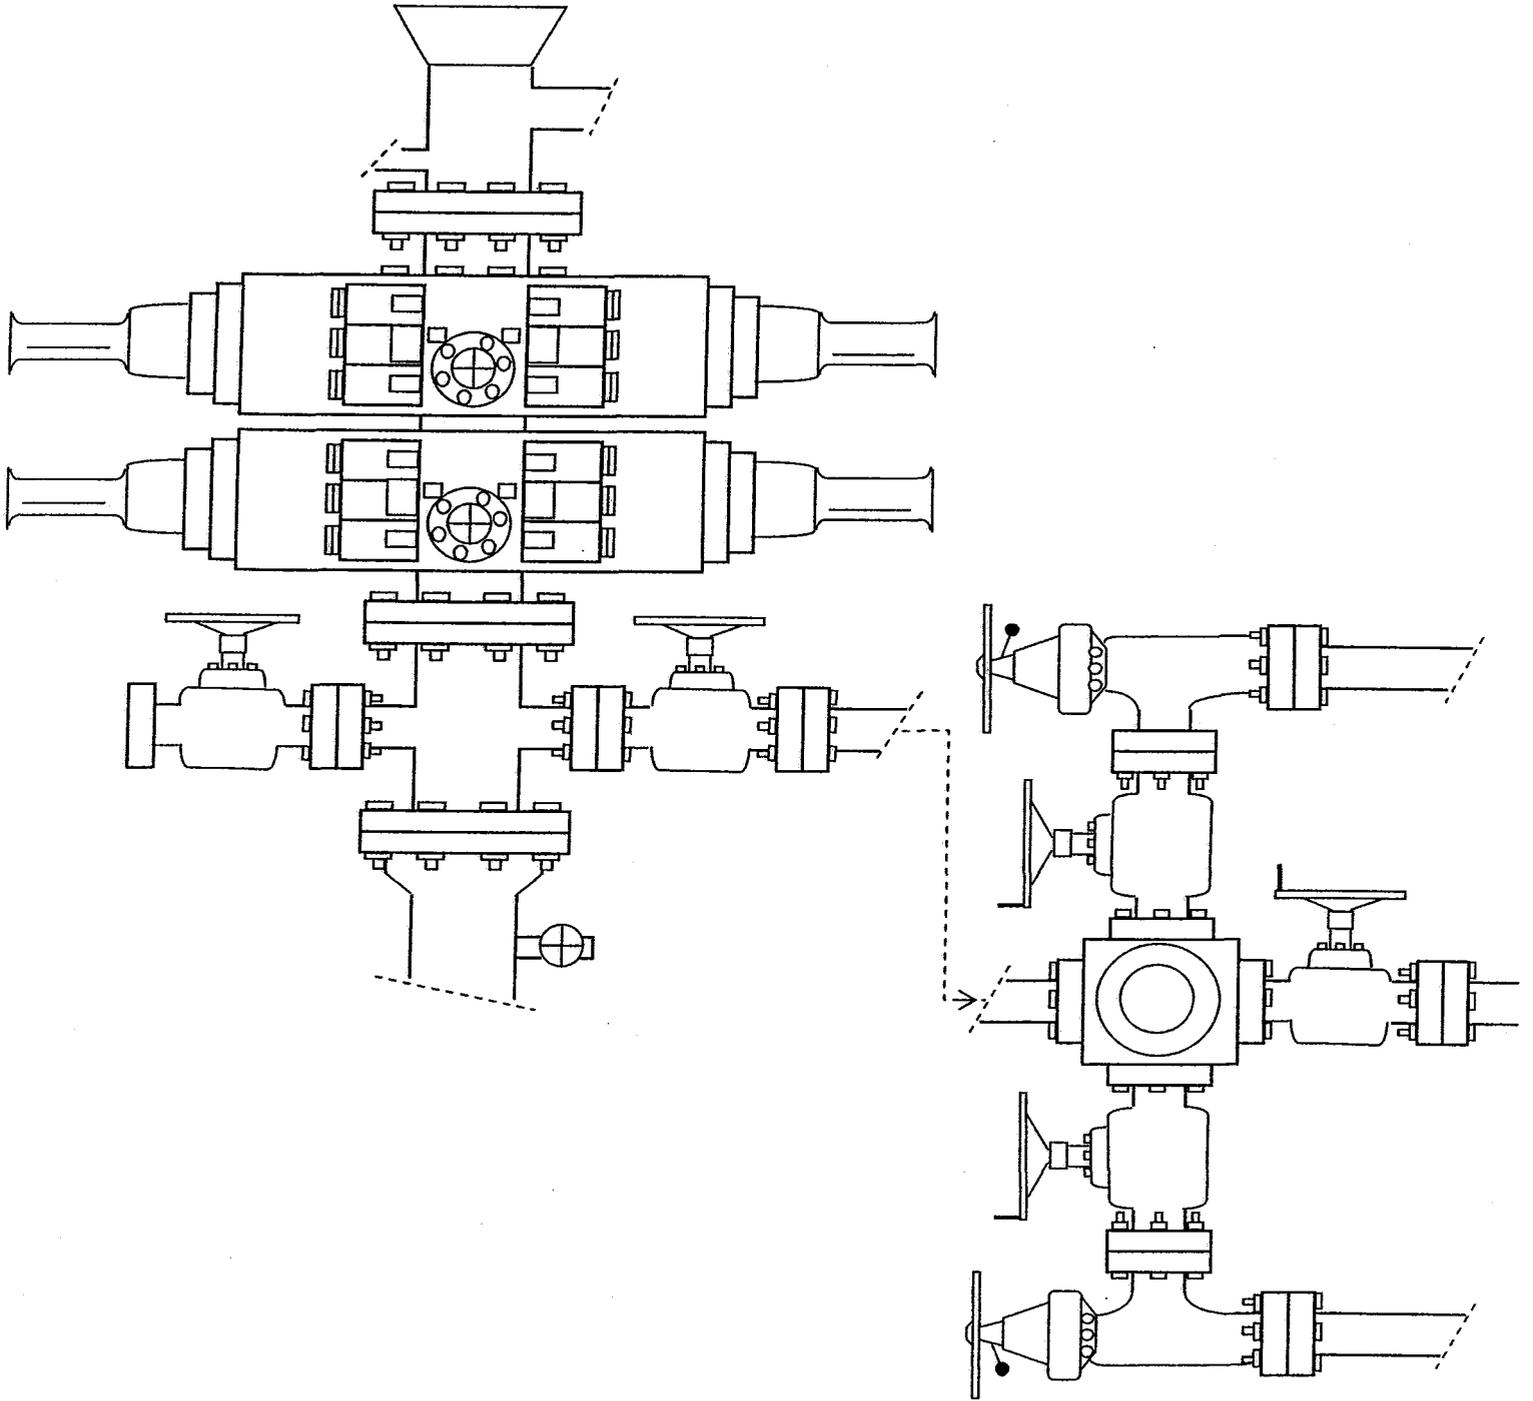


EXHIBIT C

Exhibit "D"

1 of 2

CULTURAL RESOURCE INVENTORIES OF 400 ACRES
IN THE WELLS DRAW AND PARIETTE BENCH
LOCALITIES FOR INLAND PRODUCTION COMPANY
DUCHESNE COUNTY, UTAH

by

Keith R. Montgomery

Prepared For:

Bureau of Land Management
Vernal Field Office
and
State of Utah
School and Institutional
Trust Lands Administration

Prepared Under Contract With:

Inland Production Company
2507 Flintridge Place
Fort Collins CO 80521

Prepared By:

Montgomery Archaeological Consultants
P.O. Box 147
Moab, Utah 84532

MOAC Report No. 01-03

January 17, 2001

United States Department of Interior (FLPMA)
Permit No. 00-UT-60122

State of Utah Antiquities Project (Survey)
Permit No. U-01-MQ-0010b,s

✓



INLAND RESOURCES, INC.

**PALEONTOLOGICAL SURVEY OF PROPOSED
PRODUCTION DEVELOPMENT AREAS,
SOUTHEASTERN DUCHESNE COUNTY, UTAH**

(Section 11, T 9 S, R 16 E; Section 7, T 9 S, R 17 E;
Section 8, T 9 S, R 17 E; Section 18, T 9 S, R 17 E)

REPORT OF SURVEY

WM # 01-01

Prepared for:

Inland Resources, Inc.

Prepared by:

Wade E. Miller
Consulting Paleontologist
January 6, 2001

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 12/11/2008

API NO. ASSIGNED: 43-013-34156

WELL NAME: BELUGA FED D-18-9-17
 OPERATOR: NEWFIELD PRODUCTION (N2695)
 CONTACT: MANDIE CROZIER

PHONE NUMBER: 435-646-3721

PROPOSED LOCATION:

SWSW 07 090S 170E
 SURFACE: 0796 FSL 0729 FWL
 BOTTOM: 0010 FNL 1340 FWL *Sec 18*
 COUNTY: DUCHESNE
 LATITUDE: 40.04031 LONGITUDE: -110.0550
 UTM SURF EASTINGS: 580619 NORTHINGS: 4432449
 FIELD NAME: MONUMENT BUTTE (105)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
 LEASE NUMBER: UTU-72106
 SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: GRRV
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. WYB000493)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 43-7478)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:

- R649-2-3.
- Unit: BELUGA (GRRV)
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: 228-4
Eff Date: 2-4-1996
Siting: Does Not Suspend Direct Siting
- R649-3-11. Directional Drill

COMMENTS: See separate file

STIPULATIONS: 1-Federal Approval



December 9, 2008

State of Utah, Division of Oil, Gas and Mining
ATTN: Diana Mason
PO Box 145801
Salt Lake City, UT 84114-5801

RE: Directional Drilling
Beluga Federal D-18-9-17
Beluga Unit
UTU-75023X
Surface Hole: T9S R17E, Section 7: Lot 4
796' FSL 729' FWL
Bottom Hole: T9S R17E, Section 18
10' FNL 1340' FWL
Duchesne County, Utah

Dear Ms. Mason;

Pursuant to the filing of Newfield Production Company's ("NPC") Application for Permit to Drill dated November 24, 2008, a copy of which is attached, for the above referenced well, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole location and bottom hole location of this well are both within the boundaries of the Beluga Unit UTU-75023X. Newfield certifies that it is the Beluga Unit Operator and all lands within 460 feet of the entire directional well bore are within the Beluga Unit.

NPC is permitting this well as a directional well in order to minimize surface disturbance. By directionally drilling from the referenced surface location, NPC will be able to utilize the existing roads and pipelines in this area.

NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please do not hesitate to contact the undersigned at 303-382-4444 or by email at reveland@newfield.com. Your consideration of this matter is greatly appreciated.

Sincerely,

A handwritten signature in cursive script that reads "Roxann Eveland".

Roxann Eveland
Land Associate

RECEIVED

DEC 15 2008

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0137
Expires July 31, 2010

5. Lease Serial No. UTU-72106	
6. If Indian, Allottee or Tribe Name NA	
1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER	7. If Unit or CA Agreement, Name and No. Beluga
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone	8. Lease Name and Well No. Beluga Federal D-18-9-17
2. Name of Operator Newfield Production Company	
9. API Well No.	
3a. Address Route #3 Box 3630, Myton UT 84052	3b. Phone No. (include area code) (435) 646-3721
10. Field and Pool, or Exploratory Monument Butte	
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface SW/SW (Lot #4) 796' FSL 729' FWL Sec. 7, T9S R17E At proposed prod. zone 10' FNL 1340' FWL Sec. 18, T9S R17E	
11. Sec., T. R. M. or Blk. and Survey or Area Sec. 7, T9S R17E	
14. Distance in miles and direction from nearest town or post office* Approximately 17.4 miles southwest of Myton, UT	12. County or Parish Duchesne
	13. State UT
15. Distance from proposed* location to nearest property or lease line, ft. Approx. 20' f/lse, 1340' f/unit (Also to nearest drig. unit line, if any)	16. No. of acres in lease 1,188.92
	17. Spacing Unit dedicated to this well 20 Acres
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1330'	19. Proposed Depth 5,905'
	20. BLM/BIA Bond No. on file WYB000493
21. Elevations (Show whether DF, KDB, RI, GL, etc.) 5379' GL	22. Approximate date work will start* 1st Qtr. 2009
	23. Estimated duration (7) days from SPUD to rig release

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM. |

25. Signature 	Name (Printed/Typed) Mandie Crozier	Date 11/24/08
Title Regulatory Specialist		
Approved by (Signature)	Name (Printed/Typed)	Date
Title	Office	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

RECEIVED
DEC 15 2008

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office

P.O. Box 45155

Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:

3160

(UT-922)

December 19, 2008

Memorandum

To: Assistant District Manager Minerals, Vernal District
From: Michael Coulthard, Petroleum Engineer
Subject: 2008 Plan of Development Beluga Unit, Duchesne County,
Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following well is planned for calendar year 2008 within the Beluga Unit, Duchesne County, Utah.

API#	WELL NAME	LOCATION
------	-----------	----------

(Proposed PZ Green River)

43-013-34156 Beluga Fed D-18-9-17 Sec 07 T09S R17E 0796 FSL 0729 FWL
BHL Sec 18 T09S R17E 0010 FNL 1340 FWL

We have no objections to permitting the well so long as the unit operator receives an exception to the locating and siting requirements of the State of Utah (R649-3-2).

/s/ Michael L. Coulthard

bcc: File – Beluga Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:12-19-08



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah
DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil Gas and Mining

JOHN R. BAZA
Division Director

December 22, 2008

Newfield Production Company
Rt 3 Box 3630
Myton, UT 84052

Re: Beluga Federal D-18-9-17 Well, Surface Location 796' FSL, 729' FWL, SW SW, Sec. 7, T. 9 South, R. 17 East, Bottom Location 10' FNL, 1340' FWL, NW NE, Sec. 18, T. 9 South, R. 17 East, Duchesne County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-013-34156.

Sincerely,

Gil Hunt
Associate Director

js
Enclosures

cc: Duchesne County Assessor
Bureau of Land Management, Vernal Field Office



Operator: Newfield Production Company
Well Name & Number Beluga Federal D-18-9-17
API Number: 43-013-34156
Lease: UTU-72106

Surface Location: SW SW Sec. 7 T. 9 South R. 17 East
Bottom Location: NW NE Sec. 18 T. 9 South R. 17 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281 (801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

5a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU-72106
5b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name NA
2. Name of Operator Newfield Production Company		7. If Unit or CA Agreement, Name and No. Beluga
3a. Address Route #3 Box 3630, Myton UT 84052		8. Lease Name and Well No. Beluga Federal D-18-9-17
3b. Phone No. (include area code) (435) 646-3721		9. API Well No. 43 013 34156
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface SW/SW (Lot #4) 796' FSL 729' FWL Sec. 7, T9S R17E At proposed prod. zone 10' FNL 1340' FWL Sec. 18, T9S R17E <i>NENW</i>		10. Field and Pool, or Exploratory Monument Butte
14. Distance in miles and direction from nearest town or post office* Approximately 17.4 miles southwest of Myton, UT		11. Sec., T. R. M. or Blk. and Survey or Area Sec. 7, T9S R17E
15. Distance from proposed* location to nearest property or lease line, ft. Approx. 20' f/lse, 1340' f/unit (Also to nearest drig. unit line, if any)	16. No. of acres in lease 1,188.92	17. Spacing Unit dedicated to this well 20 Acres
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1330'	19. Proposed Depth 5,905'	20. BLM/BIA Bond No. on file WYB000493
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5379' GL	22. Approximate date work will start* <i>1st Qtr. 2009</i>	23. Estimated duration (7) days from SPUD to rig release
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. I, must be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM. |

25. Signature <i>Mandie Crozier</i>	Name (Printed/Typed) Mandie Crozier	Date 11/24/08
Title Regulatory Specialist		

Approved by (Signature) <i>Jerry Kenicka</i>	Name (Printed/Typed) JERRY KENICKA	Date APR 27 2009
Title Assistant Field Manager Lands & Mineral Resources		
Office VERNAL FIELD OFFICE		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

CONDITIONS OF APPROVAL ATTACHED

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2) *(Instructions on page 2)

NOTICE OF APPROVAL

BUREAU OF LAND MGMT
DEPT OF THE INTERIOR

NOV 10 2008 10 14 PM
RECEIVED
AFMSS# 09SX50010A

MAY 13 2009

DIV. OF OIL, GAS & MINING

UDOGM




**UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE**

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company:	Newfield Production Company	Location:	SWSW, Sec. 7, T9S, R17E (S) NENW, Sec. 18, T9S, R17E (B)
Well No:	Beluga Federal D-18-9-17	Lease No:	UTU-72106
API No:	43-013-34156	Agreement:	Beluga (GR) Unit

Title	Name	Office Phone Number	Cell Phone Number
Petroleum Engineer:	Matt Baker	(435) 781-4490	(435) 828-4470
Petroleum Engineer:	Michael Lee	(435) 781-4432	(435) 828-7875
Petroleum Engineer:	Ryan Angus	(435) 781-4430	(435) 828-7368
Supervisory Petroleum Technician:	Jamie Sparger	(435) 781-4502	(435) 828-3913
Supervisory NRS:	Karl Wright	(435) 781-4484	
NRS/Enviro Scientist:	Christine Cimiluca	(435) 781-4475	
NRS/Enviro Scientist:	Dan Emmett	(435) 781-3414	(435) 828-4029
NRS/Enviro Scientist:	Anna Figueroa	(435) 781-3407	(435) 828-3548
NRS/Enviro Scientist:	Lori Ford	(435) 781-4406	
NRS/Enviro Scientist:	David Gordon	(435) 781-4424	
NRS/Enviro Scientist:	James Hereford	(435) 781-3412	(435) 828-3546
NRS/Enviro Scientist:	Chuck Macdonald	(435) 781-4441	(435) 828-7481
NRS/Enviro Scientist:	Nathan Packer	(435) 781-3405	(435) 828-3545
NRS/Enviro Scientist:	Paul Percival	(435) 781-4493	(435) 828-7381
NRS/Enviro Scientist:	Verlyn Pindell	(435) 781-3402	(435) 828-3547
NRS/Enviro Scientist:	Holly Villa	(435) 781-4404	(435) 828-3544

Fax: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify Environmental Scientist)	-	Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	-	Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings.
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

- All new and replacement internal combustion gas field engines of less than or equal to 300 design-rated horsepower must not emit more than 2 gms of NO_x per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower.
- All and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 gms of NO_x per horsepower-hour.
- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.
- Noxious and/or invasive weeds will be controlled along access roads, pipelines, well sites, and all other applicable facilities. Any noxious and/or invasive weeds outbreak, directly attributed to the activities of the Operator, will be the responsibility of the Operator to control. On BLM administered land, a Pesticide Use Proposal (PUP) must be submitted and approved prior to the application of herbicides, pesticides, or other possibly hazardous chemicals.
- Within 90 calendar days of the approval date for this Application for Permit to Drill (APD), the operator/lessee shall submit to the Authorized Officer (AO), on Sundry Notice Form 3160-5, an Interim/Final Surface Reclamation Plan for surface disturbance on well pads, access roads, and pipelines. At a minimum, this will include the reshaping of the pad to the original contour to the extent possible; the respreading of the top soil up to the rig anchor points; and, the area reseeded using appropriate reclamation methods. The AO will provide written approval or concurrence within 30 calendar days of receipt.

Interim Reclamation:

The topsoil from the reserve pit shall be stripped and piled separately near the reserve pit. When the reserve pit is closed, it shall be recontoured and the topsoil respread, and the area shall be **seeded using a rangeland drill**. Seeding depth as per AO, or seed distributor. If portions of the site are too steep (>40%), or rocky, that portion may be broadcast seeded. If broadcasting seed, the seed shall be walked into the soil with a dozer immediately after the seeding is completed, or covered by soil using a drag chain. Forage Kochia seeds must be broadcast. Seeding shall occur in the fall (August 1st until snow or ground is frozen) with the following seed mix:

Seed mix:

Common name	Latin name	lbs/acre	Recommended seed planting depth
Forage Kochia	<i>Kochia prostrata</i>	0.20	1/4"
Squirreltail grass	<i>Elymus elymoides</i>	3.0	1/4 - 1/2"
Siberian wheatgrass	<i>Agropyron fragile</i>	1.0	1/2"
Shadscale saltbush	<i>Atriplex confertifolia</i>	0.50	1/2"
Four-wing saltbush	<i>Atriplex canescens</i>	0.50	1/2"
Gardner's saltbush	<i>Atriplex gardneri</i>	0.50	1/2"
Scarlet globemallow	<i>Sphaeralcea coccinea</i>	0.10	1/8 - 1/4"

- All pounds are pure live seed.
- All seed and mulch will be certified weed free.
- Rates are set for drill seeding; double rate if broadcasting.
- Reseeding may be required if initial seeding is not successful.

Final reclamation:

The topsoil from the reserve pit shall be stripped and piled separately near the reserve pit. When the reserve pit is closed, it shall be recontoured and the topsoil respread, and the area shall be seeded in the same manner as the location topsoil.

Once the location is plugged and abandoned, the well location, access, and any disturbed areas shall be recontoured to natural topography, topsoil shall be respread, and the entire location shall be seeded following guidelines in the seed mix bullet statement above. Final seed mix: same as interim unless otherwise instructed. If reclamation seeding should take place using the broadcast method, the seed at a minimum will be walked into the soil with a dozer immediately after the seeding is completed.

**DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

SITE SPECIFIC DOWNHOLE COAs:

- Newfield Production Co. shall adhere to all referenced requirements in the SOP (version: June 24, 2008) along with all Oil and Gas rules and requirements listed in the Code of Federal Regulations and all Federal Onshore Oil and Gas Orders.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth

(from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location ($\frac{1}{4}$ / $\frac{1}{4}$, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or

data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-72106
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)
1. TYPE OF WELL Oil Well	8. WELL NAME and NUMBER: BELUGA FED D-18-9-17
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY	9. API NUMBER: 43013341560000
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052	PHONE NUMBER: 435 646-4825 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0796 FSL 0729 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSW Section: 07 Township: 09.0S Range: 17.0E Meridian: S	9. FIELD and POOL or WILDCAT: MONUMENT BUTTE COUNTY: DUCHESNE STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 12/18/2009	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield requests to extend the permit to drill this well for one more year.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: December 21, 2009

By: 

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 12/17/2009	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013341560000

API: 43013341560000

Well Name: BELUGA FED D-18-9-17

Location: 0796 FSL 0729 FWL QTR SWSW SEC 07 TWP 090S RNG 170E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 12/22/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Mandie Crozier

Date: 12/17/2009

Title: Regulatory Tech **Representing:** NEWFIELD PRODUCTION COMPANY

Date: December 21, 2009

By: 

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. Lease Serial No.
UTU-64381

1a. Type of Well Oil Well Gas Well Dry Other
 b. Type of Completion: New Well Work Over Deepen Plug Back Diff. Resrv.,
 Other: _____

6. If Indian, Allottee or Tribe Name
GMBU

2. Name of Operator
NEWFIELD EXPLORATION COMPANY

7. Unit or CA Agreement Name and No.
GMBU

3. Address
1401 17TH ST. SUITE 1000 DENVER, CO 80202

3a. Phone No. (include area code)
(435)646-3721

8. Lease Name and Well No.
BELUGA D-18-9-17

4. Location of Well (Report location clearly and in accordance with Federal requirements)*
 At surface 796' FSL & 729' FWL (SW/SW) (LOT 4) SEC. 7, T9S, R17E (UTU-64381)
 At top prod. interval reported below 206' FSL & 1178' FWL (SW/SW) (UTU-64381)
 At total depth 123' FNL & 1421' FWL (NE/NW) SEC. 18, T9S, R17E (UTU-72106)

10. Field and Pool or Exploratory
MONUMENT BUTTE

11. Sec., T., R., M., on Block and Survey or Area
SEC. 7, T9S, R17E

12. County or Parish
DUCHESNE

13. State
UT

14. Date Spudded
02/12/2010

15. Date T.D. Reached
02/23/2010

16. Date Completed 03/11/2010
 D & A Ready to Prod.

17. Elevations (DF, RKB, RT, GL)*
5379' GL 5391' KB

18. Total Depth: MD 6025'
TVD 5885'

19. Plug Back T.D.: MD 5968'
TVD 5839'

20. Depth Bridge Plug Set: MD
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
DUAL IND GRD, SP, COMP. DENSITY, COMP. NEUTRON, GR, CALIPER, CMT BOND

22. Was well cored? No Yes (Submit analysis)
 Was DST run? No Yes (Submit report)
 Directional Survey? No Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	8-5/8" J-55	24#	0	319'		160 CLASS G			
7-7/8"	5-1/2" J-55	15.5#	0	6013'		325 PRIMLITE		58'	
						450 50/50 POZ			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-7/8"	EOT@ 5892'	TA @ 5794'						

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Green River			5632-5817' CP4 CP5	.36"	3	18
B) Green River			5461-5512' CP.5 CP1	.34"	3	36
C) Green River			5067-5108' A1 A3	.34"	3	42
D) Green River			4897-4916' B2	.34"	3	21

26. Perforation Record

Depth Interval	Amount and Type of Material
5632-5817'	Frac w/ 20496#s 20/40 sand in 168 bbls of Lightning 17 fluid. (CP4 CP5)
5461-5512'	Frac w/ 44748#s 20/40 sand in 290 bbls of Lightning 17 fluid. (CP.5 CP1)
5067-5108'	Frac w/ 70141#s 20/40 sand in 435 bbls of Lightning 17 fluid. (A1 A3)
4897-4916'	Frac w/ 35400#s 20/40 sand in 237 bbls of Lightning 17 fluid. (B2)

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Depth Interval	Amount and Type of Material
5632-5817'	Frac w/ 20496#s 20/40 sand in 168 bbls of Lightning 17 fluid. (CP4 CP5)
5461-5512'	Frac w/ 44748#s 20/40 sand in 290 bbls of Lightning 17 fluid. (CP.5 CP1)
5067-5108'	Frac w/ 70141#s 20/40 sand in 435 bbls of Lightning 17 fluid. (A1 A3)
4897-4916'	Frac w/ 35400#s 20/40 sand in 237 bbls of Lightning 17 fluid. (B2)

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
3-11-10	3-23-10	24	→	16	0	9			2-1/2" x 1-3/4" x 24' RHAC Pump
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→					PRODUCING	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

RECEIVED

APR 20 2010

DIV. OF OIL, GAS & MINING

*(See instructions and spaces for additional data on page 2)

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

29. Disposition of Gas (Solid, used for fuel, vented, etc.)

USED FOR FUEL

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

GEOLOGICAL MARKERS

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
				GARDEN GULCH MRK GARDEN GULCH 1	3576' 3780'
				GARDEN GULCH 2 POINT 3	3896' 4154'
				X MRKR Y MRKR	4416' 4452"
				DOUGALS CREEK MRK BI CARBONATE MRK	4580' 4822'
				B LIMESTON MRK CASTLE PEAK	4939' 5432'
				BASAL CARBONATE	5879'

32. Additional remarks (include plugging procedure):

Stage 5: Green River Formation (D1 & D2) 4598-4626', .34" 3/36 Frac w/ 55495#'s of 20/40 sand in 349 bbls of Lightning 17 fluid

Stage 6: Green River Formation (GB6) 4114-4128', .34" 3/42 Frac w/ 35096#'s of 20/40 sand in 227 bbls of Lightning 17 fluid


33. Indicate which items have been attached by placing a check in the appropriate boxes:

- Electrical/Mechanical Logs (1 full set req'd.)
 Geologic Report
 DST Report
 Directional Survey
 Sundry Notice for plugging and cement verification
 Core Analysis
 Other: Drilling Daily Activity

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Lucy Chavez-Naupoto

Title Administrative Assistant

Signature 

Date 04/08/2010

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

NEWFIELD



NEWFIELD EXPLORATION

USGS Myton SW (UT)

SECTION 7 E

D-18-9-17

Wellbore #1

Design: Actual

Standard Survey Report

23 February, 2010





Company: NEWFIELD EXPLORATION
 Project: USGS Myton SW (UT)
 Site: SECTION 7 E
 Well: D-18-9-17
 Wellbore: Wellbore #1
 Design: Actual

Local Co-ordinate Reference: Well D-18-9-17
 TVD Reference: WELL @ 5391.0ft (NEWFIELD RIG)
 MD Reference: WELL @ 5391.0ft (NEWFIELD RIG)
 North Reference: True
 Survey Calculation Method: Minimum Curvature
 Database: EDM 2003.21 Single User Db

Project	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		Using geodetic scale factor

Site SECTION 7 E, SEC 7 T9S, R17E

Site Position:		Northing:	7,188,503.00ft	Latitude:	40° 2' 42.929 N
From:	Lat/Long	Easting:	2,046,559.00ft	Longitude:	110° 2' 57.037 W
Position Uncertainty:	0.0 ft	Slot Radius:	"	Grid Convergence:	0.93 °

Well D-18-9-17, SHL: LAT 40 02 25.03 LONG -110 03 20.66

Well Position	+N/-S	0.0 ft	Northing:	7,186,662.46 ft	Latitude:	40° 2' 25.030 N
	+E/-W	0.0 ft	Easting:	2,044,751.42 ft	Longitude:	110° 3' 20.660 W
Position Uncertainty		0.0 ft	Wellhead Elevation:	5,391.0 ft	Ground Level:	5,379.0 ft

Wellbore Wellbore #1

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	2009/12/31	11.48	65.84	52,445

Design Actual

Audit Notes:

Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.0
-----------------	-----	---------------	--------	----------------------	-----

Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.0	0.0	0.0	142.87

Survey Program Date 2010/02/23

From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description
427.0	6,015.0	Survey #1 (Wellbore #1)	MWD	MWD - Standard


Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
427.0	0.60	21.80	427.0	2.1	0.8	-1.2	0.14	0.14	0.00
457.0	0.60	45.20	457.0	2.3	1.0	-1.3	0.81	0.00	78.00
488.0	0.50	63.90	488.0	2.5	1.2	-1.3	0.66	-0.32	60.32
518.0	0.70	106.50	518.0	2.5	1.5	-1.1	1.58	0.67	142.00
549.0	1.10	124.80	549.0	2.3	2.0	-0.6	1.57	1.29	59.03
580.0	1.50	127.80	580.0	1.9	2.5	0.0	1.31	1.29	9.68
610.0	1.90	125.70	610.0	1.3	3.2	0.9	1.35	1.33	-7.00
641.0	2.20	133.40	640.9	0.6	4.1	2.0	1.31	0.97	24.84
671.0	2.70	139.80	670.9	-0.3	5.0	3.2	1.90	1.67	21.33
702.0	3.10	138.10	701.9	-1.5	6.0	4.8	1.32	1.29	-5.48
732.0	3.60	142.00	731.8	-2.8	7.1	6.6	1.83	1.67	13.00
763.0	4.10	141.40	762.8	-4.5	8.4	8.6	1.62	1.61	-1.94



HATHAWAY BURNHAM

Survey Report



Company: NEWFIELD EXPLORATION
Project: USGS Myton SW (UT)
Site: SECTION 7 E
Well: D-18-9-17
Wellbore: Wellbore #1
Design: Actual

Local Co-ordinate Reference: Well D-18-9-17
TVD Reference: WELL @ 5391.0ft (NEWFIELD RIG)
MD Reference: WELL @ 5391.0ft (NEWFIELD RIG)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.21 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
793.0	4.50	142.50	792.7	-6.2	9.8	10.9	1.36	1.33	3.67
824.0	5.00	144.50	823.6	-8.3	11.3	13.4	1.70	1.61	6.45
854.0	5.40	144.80	853.4	-10.5	12.9	16.2	1.34	1.33	1.00
885.0	6.00	146.30	884.3	-13.1	14.6	19.2	1.99	1.94	4.84
916.0	6.40	145.20	915.1	-15.8	16.5	22.6	1.35	1.29	-3.55
948.0	7.00	144.90	946.9	-18.9	18.6	26.3	1.88	1.88	-0.94
980.0	7.60	143.60	978.6	-22.2	21.0	30.4	1.94	1.88	-4.06
1,011.0	7.80	142.90	1,009.3	-25.5	23.5	34.5	0.71	0.65	-2.26
1,043.0	8.10	141.50	1,041.0	-29.0	26.2	39.0	1.12	0.94	-4.38
1,074.0	8.40	141.00	1,071.7	-32.5	29.0	43.4	1.00	0.97	-1.61
1,106.0	8.90	141.30	1,103.4	-36.2	32.0	48.2	1.57	1.56	0.94
1,138.0	9.30	141.50	1,135.0	-40.2	35.2	53.3	1.25	1.25	0.63
1,169.0	9.60	142.30	1,165.5	-44.2	38.3	58.4	1.06	0.97	2.58
1,201.0	9.90	142.50	1,197.1	-48.5	41.6	63.8	0.94	0.94	0.63
1,264.0	10.50	143.30	1,259.1	-57.4	48.4	74.9	0.98	0.95	1.27
1,296.0	10.70	143.20	1,290.5	-62.1	51.9	80.8	0.63	0.63	-0.31
1,328.0	10.80	143.30	1,322.0	-66.9	55.5	86.8	0.32	0.31	0.31
1,359.0	11.10	143.90	1,352.4	-71.6	58.9	92.7	1.04	0.97	1.94
1,391.0	11.20	143.70	1,383.8	-76.6	62.6	98.9	0.34	0.31	-0.63
1,423.0	11.60	143.00	1,415.2	-81.7	66.4	105.2	1.32	1.25	-2.19
1,455.0	11.80	141.50	1,446.5	-86.8	70.4	111.7	1.14	0.63	-4.69
1,486.0	11.90	139.20	1,476.8	-91.7	74.4	118.0	1.56	0.32	-7.42
1,518.0	11.90	139.20	1,508.2	-96.7	78.7	124.6	0.00	0.00	0.00
1,613.0	12.70	139.30	1,601.0	-112.0	91.9	144.8	0.84	0.84	0.11
1,708.0	12.70	141.30	1,693.6	-128.1	105.3	165.7	0.46	0.00	2.11
1,803.0	12.70	142.99	1,786.3	-144.6	118.1	186.6	0.39	0.00	1.78
1,899.0	13.65	144.39	1,879.8	-162.2	131.0	208.4	1.04	0.99	1.46
1,994.0	14.33	146.26	1,972.0	-181.1	144.1	231.4	0.86	0.72	1.97
2,089.0	14.33	144.22	2,064.0	-200.4	157.5	254.9	0.53	0.00	-2.15
2,184.0	14.46	142.74	2,156.0	-219.4	171.6	278.5	0.41	0.14	-1.56
2,279.0	14.14	144.61	2,248.1	-238.3	185.5	301.9	0.59	-0.34	1.97
2,374.0	13.70	142.61	2,340.3	-256.7	199.0	324.8	0.69	-0.46	-2.11
2,469.0	13.16	142.24	2,432.7	-274.2	212.5	346.9	0.58	-0.57	-0.39
2,564.0	14.00	142.57	2,525.1	-291.9	226.1	369.2	0.89	0.88	0.35
2,659.0	15.70	147.34	2,616.9	-311.8	240.0	393.5	2.20	1.79	5.02
2,754.0	16.11	146.68	2,708.2	-333.7	254.2	419.4	0.47	0.43	-0.69
2,849.0	14.74	145.89	2,799.8	-354.7	268.2	444.7	1.46	-1.44	-0.83
2,944.0	14.88	144.35	2,891.7	-374.6	282.1	468.9	0.44	0.15	-1.62
3,039.0	14.39	141.45	2,983.6	-393.7	296.5	492.9	0.93	-0.52	-3.05
3,134.0	14.59	140.55	3,075.6	-412.2	311.5	516.7	0.32	0.21	-0.95
3,229.0	13.80	139.60	3,167.7	-430.1	326.4	539.9	0.87	-0.83	-1.00
3,324.0	13.50	138.90	3,260.0	-447.1	341.1	562.3	0.36	-0.32	-0.74
3,420.0	14.00	140.30	3,353.2	-464.4	355.9	585.1	0.63	0.52	1.46
3,515.0	13.60	142.20	3,445.5	-482.1	370.0	607.7	0.64	-0.42	2.00
3,610.0	12.70	141.80	3,538.0	-499.1	383.3	629.4	0.95	-0.95	-0.42
3,705.0	13.10	142.20	3,630.6	-515.9	396.4	650.6	0.43	0.42	0.42
3,800.0	13.80	144.00	3,723.0	-533.5	409.7	672.7	0.86	0.74	1.89
3,895.0	14.50	145.20	3,815.1	-552.5	423.1	695.9	0.80	0.74	1.26
3,990.0	14.20	145.50	3,907.1	-571.8	436.5	719.4	0.33	-0.32	0.32
4,085.0	13.20	145.90	3,999.4	-590.4	449.2	741.9	1.06	-1.05	0.42
4,180.0	13.10	147.40	4,091.9	-608.5	461.1	763.4	0.37	-0.11	1.58
4,275.0	12.70	145.40	4,184.5	-626.1	472.8	784.6	0.63	-0.42	-2.11
4,370.0	13.45	144.33	4,277.1	-643.7	485.2	806.1	0.83	0.79	-1.13
4,465.0	13.12	144.77	4,369.5	-661.5	497.8	827.9	0.36	-0.35	0.46



HATHAWAY BURNHAM

Survey Report



Company: NEWFIELD EXPLORATION
 Project: USGS Myton SW (UT)
 Site: SECTION 7 E
 Well: D-18-9-17
 Wellbore: Wellbore #1
 Design: Actual

Local Co-ordinate Reference: Well D-18-9-17
 TVD Reference: WELL @ 5391.0ft (NEWFIELD RIG)
 MD Reference: WELL @ 5391.0ft (NEWFIELD RIG)
 North Reference: True
 Survey Calculation Method: Minimum Curvature
 Database: EDM 2003.21 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,560.0	12.96	141.32	4,462.1	-678.6	510.7	849.3	0.84	-0.17	-3.63
4,656.0	13.14	139.65	4,555.6	-695.3	524.5	871.0	0.44	0.19	-1.74
4,751.0	12.99	141.62	4,648.2	-711.9	538.1	892.4	0.49	-0.16	2.07
4,846.0	12.26	142.15	4,740.9	-728.3	550.9	913.2	0.78	-0.77	0.56
4,941.0	12.31	141.32	4,833.7	-744.1	563.5	933.4	0.19	0.05	-0.87
5,036.0	12.52	144.61	4,926.5	-760.4	575.7	953.8	0.78	0.22	3.46
5,131.0	13.65	145.84	5,019.0	-778.1	588.0	975.3	1.22	1.19	1.29
5,225.0	12.00	144.40	5,110.6	-795.2	599.9	996.1	1.79	-1.76	-1.53
5,315.2	11.81	144.02	5,198.9	-810.3	610.8	1,014.8	0.23	-0.21	-0.42
D-18-9-17 TGT									
5,320.0	11.80	144.00	5,203.6	-811.1	611.4	1,015.7	0.23	-0.21	-0.43
5,416.0	11.00	143.70	5,297.7	-826.4	622.6	1,034.7	0.84	-0.83	-0.31
5,511.0	12.00	143.60	5,390.8	-841.7	633.8	1,053.6	1.05	1.05	-0.11
5,606.0	12.10	142.90	5,483.7	-857.6	645.7	1,073.5	0.19	0.11	-0.74
5,701.0	11.80	141.80	5,576.6	-873.2	657.7	1,093.1	0.40	-0.32	-1.16
5,796.0	11.30	143.50	5,669.7	-888.3	669.2	1,112.2	0.64	-0.53	1.79
5,891.0	10.42	143.29	5,763.0	-902.7	679.9	1,130.1	0.93	-0.93	-0.22
5,964.0	9.15	145.32	5,835.0	-912.7	687.1	1,142.5	1.80	-1.74	2.78
6,015.0	8.50	145.50	5,885.4	-919.2	691.6	1,150.3	1.28	-1.27	0.35


Wellbore Targets

Target Name

- hit/miss target	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude
- Shape									
D-18-9-17 TGT	0.00	0.00	5,200.0	-805.0	609.5	7,185,867.44	2,045,373.80	40° 2' 17.074 N	110° 3' 12.824 W
- actual wellpath misses by 5.5ft at 5315.2ft MD (5198.9 TVD, -810.3 N, 610.8 E)									
- Circle (radius 75.0)									

Checked By: _____ Approved By: _____ Date: _____

NEWFIELD





Project: USGS Myton SW (UT)
Site: SECTION 7 E
Well: D-18-9-17
Wellbore: Wellbore #1
SURVEY: Actual

FINAL SURVEY REPORT



Azimuths to True North
Magnetic North: 11.48°

Magnetic Field
Strength: 52445.2snT
Dip Angle: 65.84°
Date: 2009/12/31
Model: IGRF200510

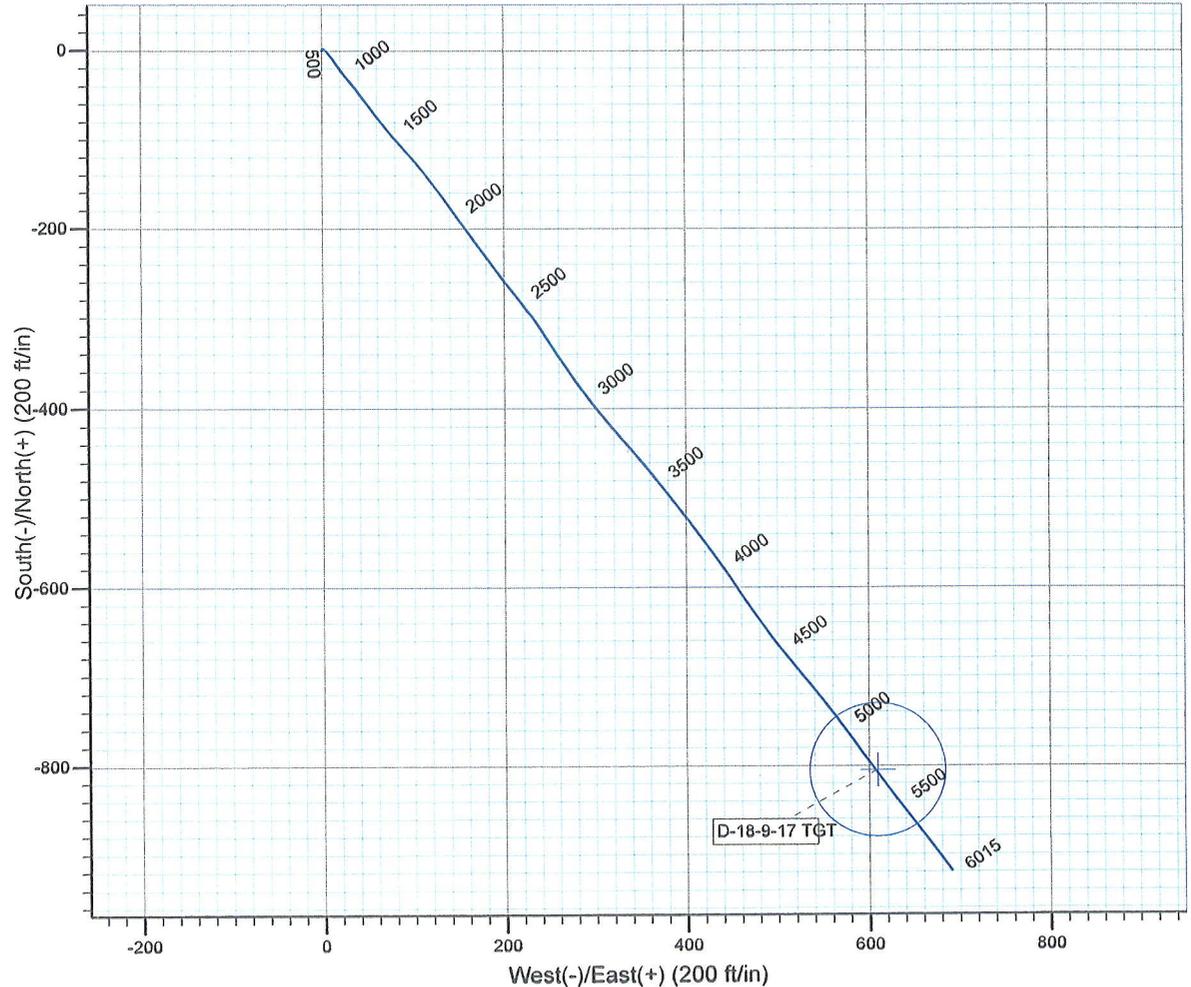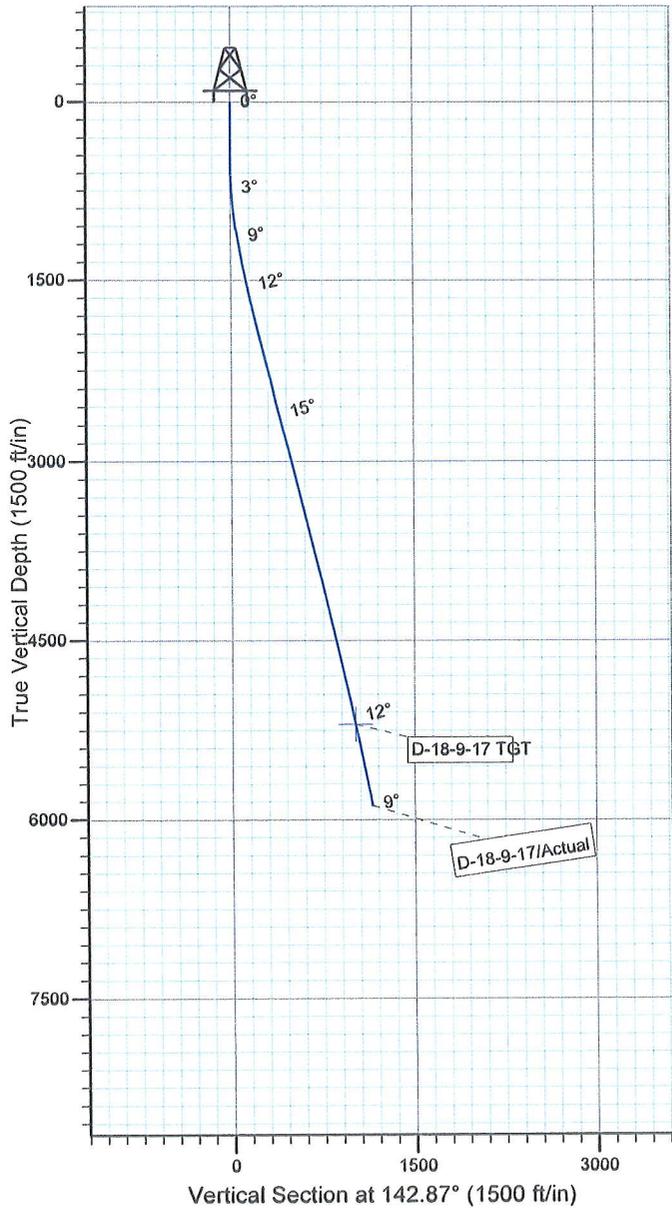

Design: Actual (D-18-9-17/Wellbore #1)

Created By: *Jim Hudson* Date: 18:04, February 23 2010
THIS SURVEY IS CORRECT TO THE BEST OF MY
KNOWLEDGE AND IS SUPPORTED BY ACTUAL FIELD DATA.

Daily Activity Report

Format For Sundry

BELUGA D-18-9-17**12/1/2009 To 4/28/2010****BELUGA D-18-9-17****Waiting on Cement****Date:** 2/17/2010

Ross #21 at 320. Days Since Spud - Ross Rig # 21 Spud the Beluga Federal D-18-9-17 @ 11:00 AM on 2/12/10 TD 320' - 1.17 yeild (G+2% CaCL+.25#/sk celloflake - On 2/12/10 ran 85/8" surface casing (Guide shoe, shoe jt, baffle plate, 6jts) Set @ 309.04 - BLM & State was notified of Spud & Cement Bill Owens watched the cmt job - On 2/16/10 cemented 85/8" surface casing with w/BJ 160 sks mixed @ 15.8 ppg &

Daily Cost: \$0**Cumulative Cost:** \$44,972**BELUGA D-18-9-17****Drill 7 7/8" hole with fresh water****Date:** 2/21/2010

NDSI #2 at 1823. 1 Days Since Spud - Drill Cement,Float & Shoe From 260' To 319' - No H2s Reported Last 24 Hrs - No Flow - Boiler 19 Hrs - P/U BHA, Scribe Directional Tools - 10 Mins,Test 8 5/8" Casing To 1500 PSI For 30 Mins.All Tested Ok. - R/U B&C Quick Test. Test Upper Kelly,Floor Valves,Pipe,Blind Rams,Ckoke Manifold To 2000 PSI For - 2/20/10 MIRU ON Beluga D-18-9-17. Set All Surface Equipment With Marcus Liddell Trk. 5.8 miles - 24 Hr Notice To BLM & State On 2/19/10 Of Rig Move 2/20/10 And Bop Test @ 6:00 PM 2/20/10 - Drill 7 7/8" Hole From 319' To 1823' WOB 20,000 lbs, ROP 163,GPM 344, 188 fph Avg ROP

Daily Cost: \$0**Cumulative Cost:** \$72,146**BELUGA D-18-9-17****Drill 7 7/8" hole with fresh water****Date:** 2/22/2010

NDSI #2 at 4326. 2 Days Since Spud - Rig Service. Check Bop's,Crown-A- Matic - Drill 7 7/8" Hole From 2647' To 4326'. 25,000 lbs,RPM 163,GPM 344, 96' fph avg ROP. - Drilled Into Pressureized Zone @ 2550' - Flow @ 3851' 5 gpm - No H2s Reported Last 24 Hrs - Drill 7 7/8" Hole From 1823' To 2647' WOB 25,000 lbs,RPM 163, GPM 344, 137.3 fph Avg ROP

Daily Cost: \$0**Cumulative Cost:** \$106,275**BELUGA D-18-9-17****Drill 7 7/8" hole with fresh water****Date:** 2/23/2010

NDSI #2 at 6025. 3 Days Since Spud - Drill 7 7/8" Hole From 4326' To 4865',WOB 25,000 lbs,RPM 163,GPM 344, 89.8 fph Avg ROP - Drill 7 7/8" Hole From 4865' To 6025', WOB 25,000 lbs,RPM 163, GPM 344, 66.8 fph AVG ROP - No H2s Reported Last 24 Hrs. - Check Flow@ 6025' 3 gal/min @ TD - Boiler 24 Hrs - Rig Service, Check Crown-A-Matic,Function Test BOP, Bop Drill All Hands In Place 1 min

Daily Cost: \$0**Cumulative Cost:** \$158,246**BELUGA D-18-9-17****Wait on Completion****Date:** 2/24/2010

NDSI #2 at 6025. 4 Days Since Spud - LDDP To 4,000' - Circ Hole For Laydown & Logs - LDDP & BHA - R/U Phoenix Surveys Log Well. Tools Quit Working. Wait 2 Hrs For Truck To Come Out From Shop.R/U - Truck. Run Compensated Density,Compensated Neutron,Gamma

Ray, Dual Guard Log, Gamma Ray (Loggers TD - 6022') To Surface - R/U B&C Quick Test 5 1/2" Pipe Rams To 2000 lbs Psi. Test ok - R/U Marcus Liddell Casing Crew, Run 141 Jts 5.5, 15.5# J-55 ,LT&C Shoe @ 6013.41' Float Collar@ 5967' - R/U BJ Services Cement Head Circ Hole With Rig Pump - Cement With BJ Services. Pump 325 sk Of Lead Cement Mixed @ 11.0 ppg & 3.53 yield (PL II+3%KCL+5#CSE - +0.5#CF+2#KOL+.5SMS+FP+SF) 450 sk Tail Cement Mixed@ 14.4 ppg With 1.24 yield (50:50:2+3%KCL+0.5% - EC- 1+.25#CF+.05#SF+.3SMS+FP-6L) Displaced With 142 bbls Returned 62 bbls To Pit Bumped Plug To 2164 - psi, 24 Hr Notice Sent Zto BLM & State On 2-22-10 TD @ 1:00 AM And Run 5.5 Casing @12:00 pm 2/23/10 - Nipple Down Bop's. Set Slips With 85,000 lbs Tension - Nipple Up Bop's Shut In For 4hrs, Clean Mud Tanks - Released Rig @ 6:00 AM 2/24/10 - Circ Gas Out, Spot 260 bbls 10# Brine **Finalized**

Daily Cost: \$0

Cumulative Cost: \$278,398

Pertinent Files: Go to File List