

STATE OF UTAH
 DEPARTMENT OF NATURAL RESOURCES
 DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL				1. WELL NAME and NUMBER Federal 14-25-8-15		
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>				3. FIELD OR WILDCAT UNDESIGNATED		
4. TYPE OF WELL Oil Well Coalbed Methane Well: NO				5. UNIT or COMMUNITIZATION AGREEMENT NAME		
6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY				7. OPERATOR PHONE 435 646-4825		
8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Myton, UT, 84052				9. OPERATOR E-MAIL mcrozier@newfield.com		
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UTU-67168		11. MINERAL OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>		12. SURFACE OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>		
13. NAME OF SURFACE OWNER (if box 12 = 'fee')				14. SURFACE OWNER PHONE (if box 12 = 'fee')		
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')				16. SURFACE OWNER E-MAIL (if box 12 = 'fee')		
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')		18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>		19. SLANT VERTICAL <input checked="" type="checkbox"/> DIRECTIONAL <input type="checkbox"/> HORIZONTAL <input type="checkbox"/>		
20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN
LOCATION AT SURFACE	546 FSL 2144 FWL	SESW	25	8.0 S	15.0 E	S
Top of Uppermost Producing Zone	546 FSL 2144 FWL	SESW	25	8.0 S	15.0 E	S
At Total Depth	546 FSL 2144 FWL	SESW	25	8.0 S	15.0 E	S
21. COUNTY DUCHESNE		22. DISTANCE TO NEAREST LEASE LINE (Feet) 546		23. NUMBER OF ACRES IN DRILLING UNIT 40		
		25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 1264		26. PROPOSED DEPTH MD: 6420 TVD: 6420		
27. ELEVATION - GROUND LEVEL 5748		28. BOND NUMBER WYB000493		29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 43-7478		

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)	<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER
<input type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)	<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP

NAME Mandie Crozier	TITLE Regulatory Tech	PHONE 435 646-4825
SIGNATURE	DATE 06/16/2009	EMAIL mcrozier@newfield.com
API NUMBER ASSIGNED 43013500500000	APPROVAL  Permit Manager	

Proposed Hole, Casing, and Cement

String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Prod	7.875	5.5	0	6420		
Pipe	Grade	Length	Weight			
	Grade J-55 LT&C	6420	15.5			

Proposed Hole, Casing, and Cement

String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Surf	12.25	8.625	0	290		
Pipe	Grade	Length	Weight			
	Grade J-55 ST&C	290	24.0			

NEWFIELD PRODUCTION COMPANY
FEDERAL 14-25-8-15
SE/SW SECTION 25, T8S, R15E
DUCHESNE COUNTY, UTAH

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. GEOLOGIC SURFACE FORMATION:

Uinta formation of Upper Eocene Age

2. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:

Uinta 0' – 1610'
Green River 1610'
Wasatch 6420'
Base of Moderately Saline Ground Water @ 265'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:

Green River Formation 1610' – 6420' - Oil

4. PROPOSED CASING PROGRAM

Please refer to the Monument Butte Field Standard Operation Procedure (SOP).

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

Please refer to the Monument Butte Field SOP. See Exhibit "C".

6. TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:

Please refer to the Monument Butte Field SOP.

7. AUXILIARY SAFETY EQUIPMENT TO BE USED:

Please refer to the Monument Butte Field SOP.

8. TESTING, LOGGING AND CORING PROGRAMS:

Please refer to the Monument Butte Field SOP.

9. ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:

The anticipated maximum bottom hole pressure is 1800 psi. It is not anticipated that abnormal temperatures will be encountered.

10. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:

Please refer to the Monument Butte Field SOP.

2-M SYSTEM

Blowout Prevention Equipment Systems



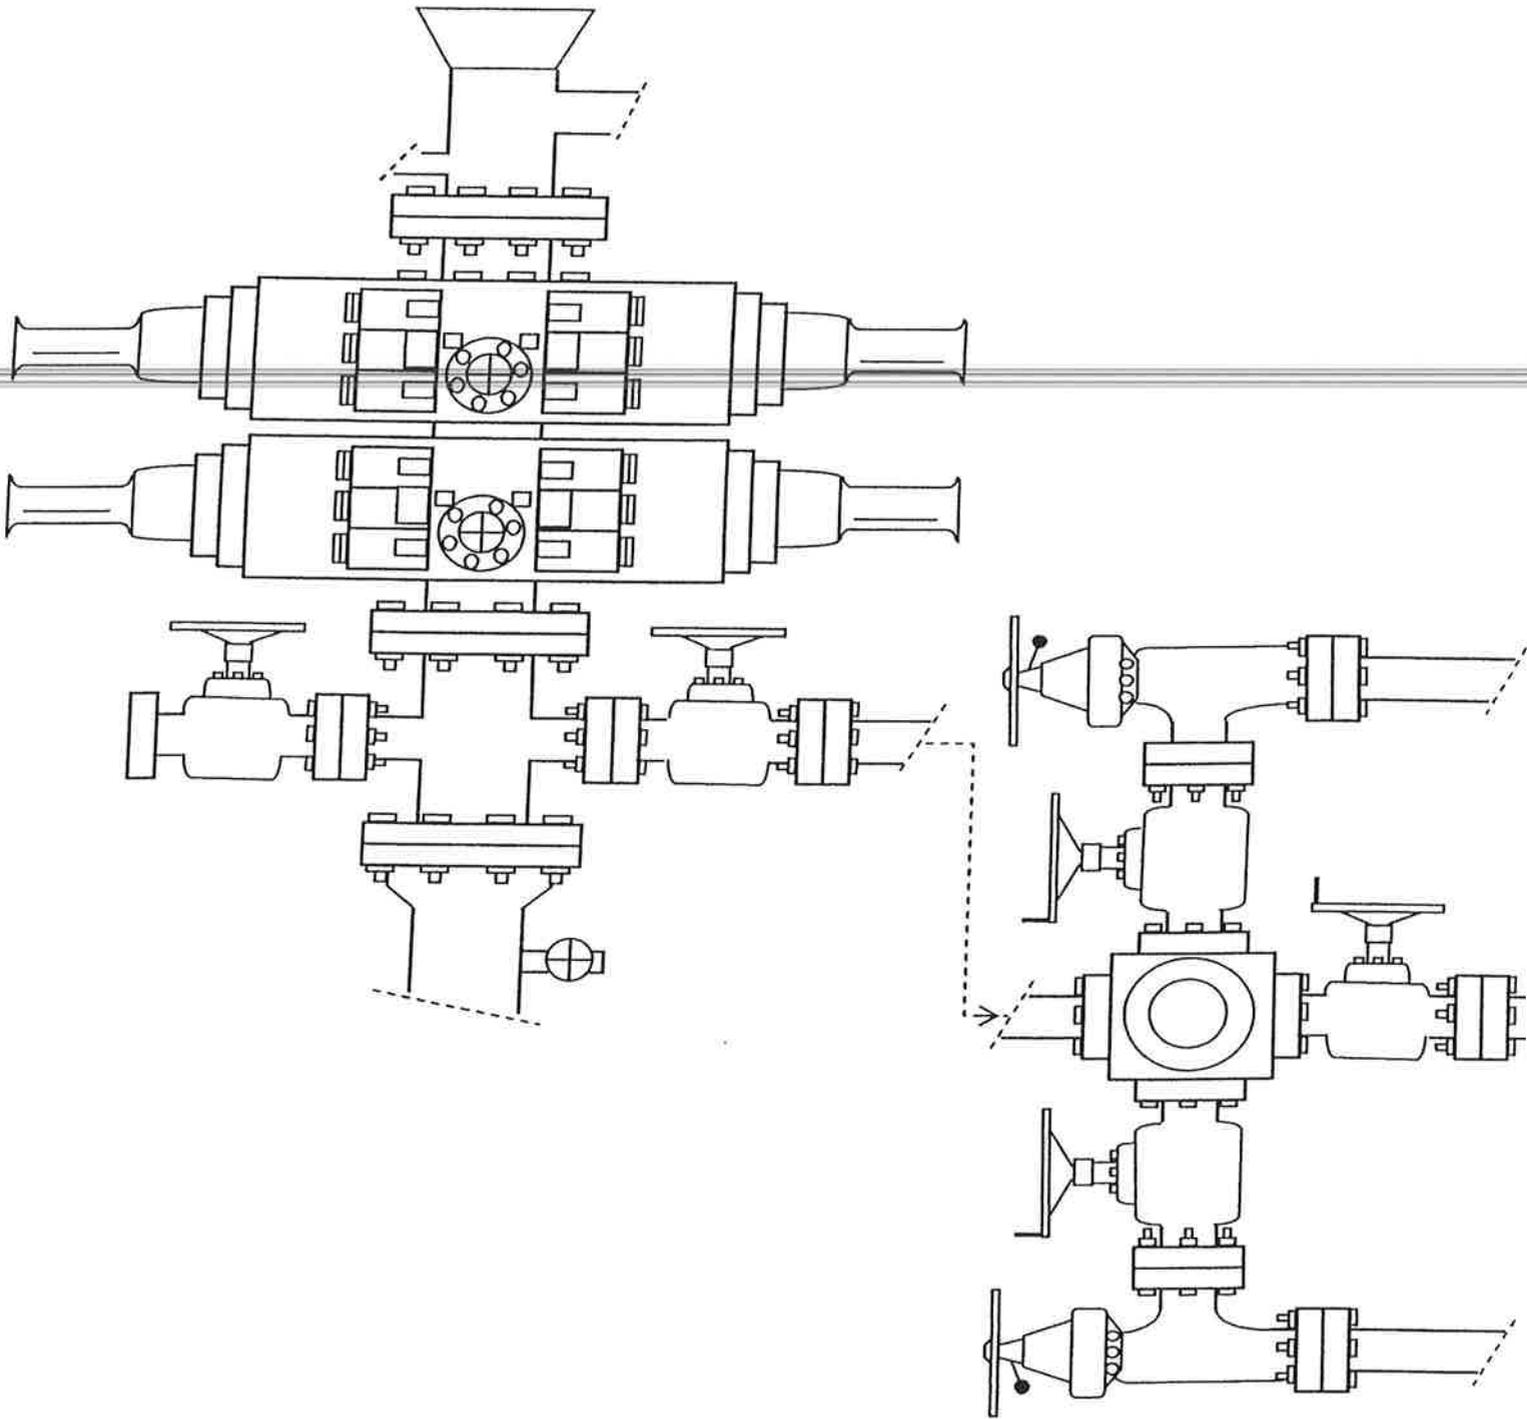


EXHIBIT C

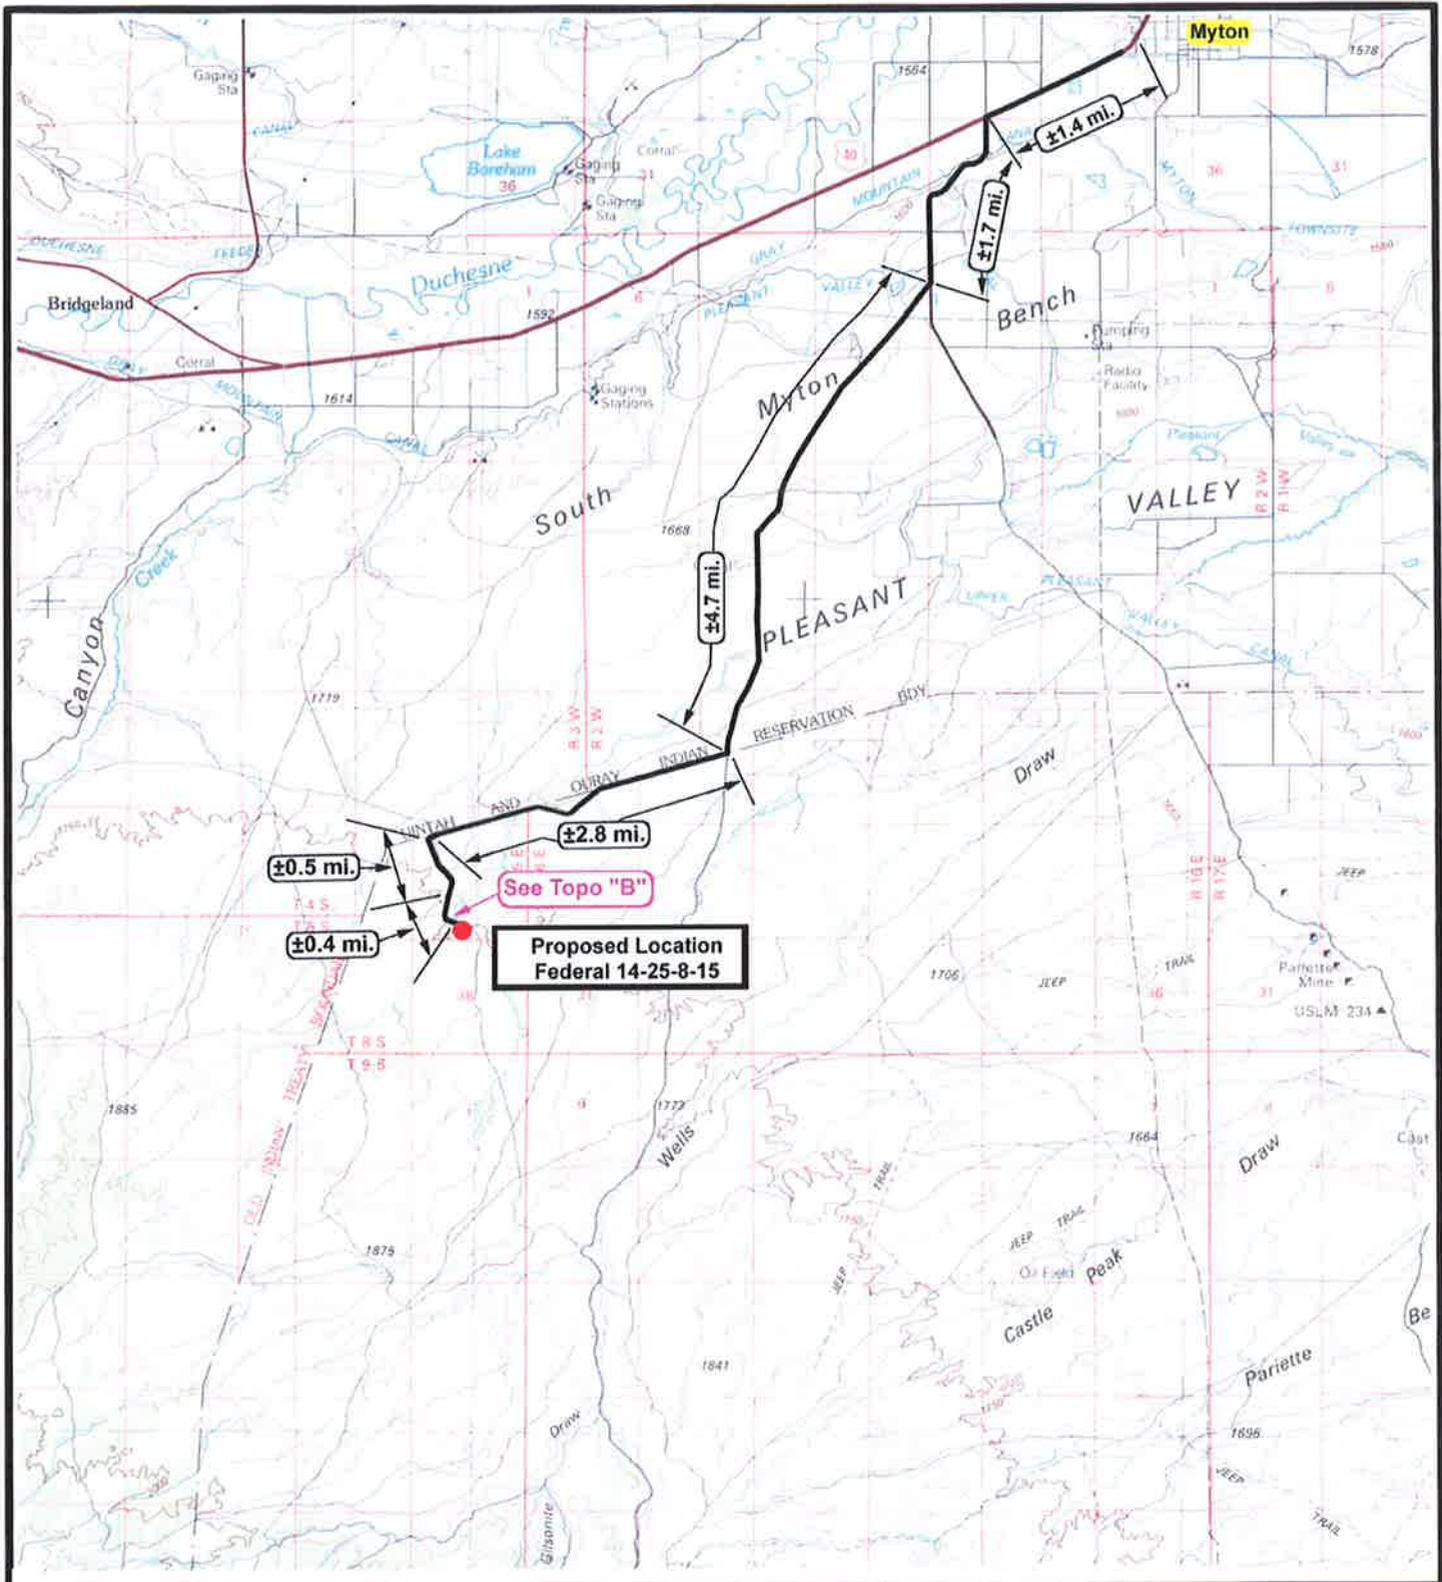

NEWFIELD
Exploration Company

Federal 14-25-8-15
SEC. 25, T8S, R15E, S.L.B.&M.




Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1 = 100,000
DRAWN BY: JAS
DATE: 06-16-2009

Legend

- Existing Road
- Proposed Access

TOPOGRAPHIC MAP
"A"

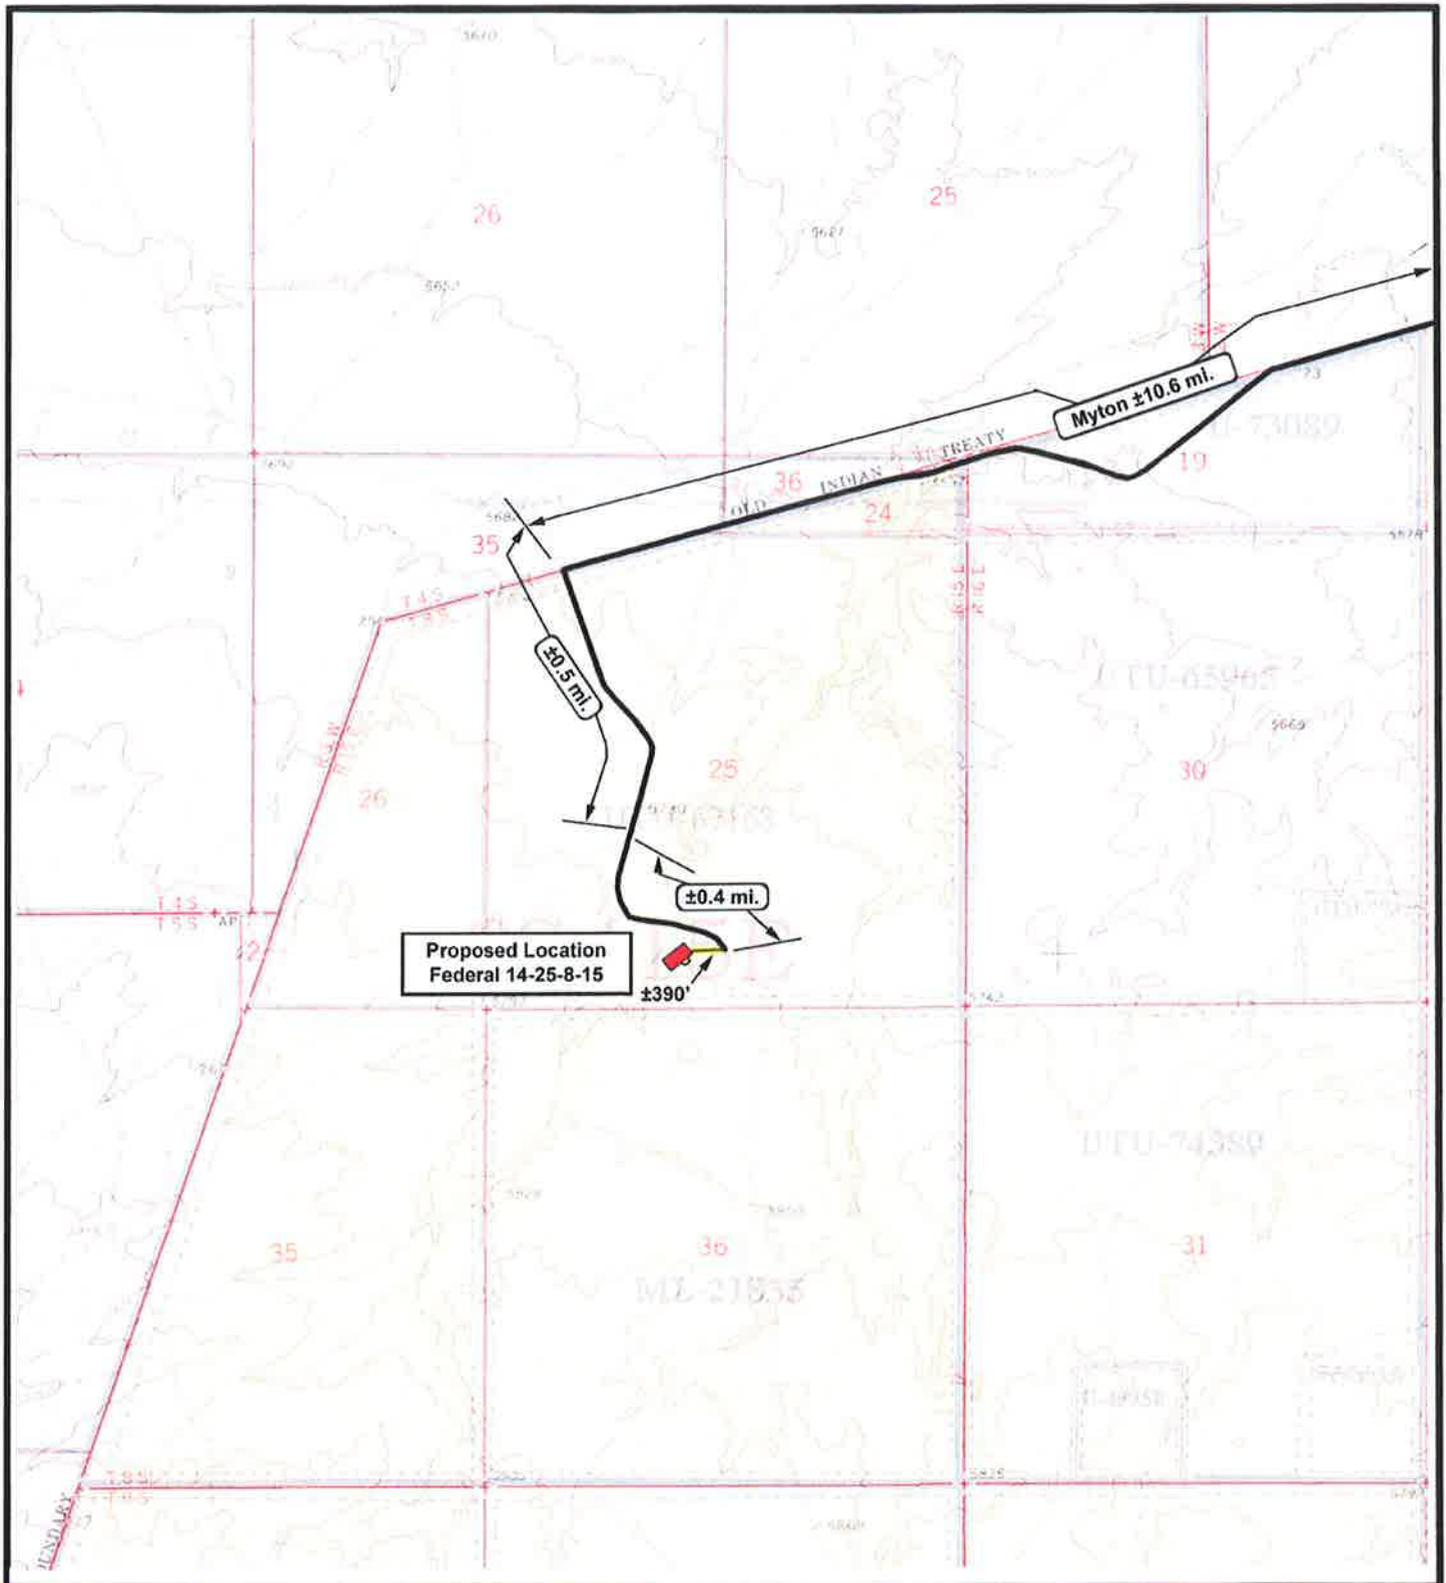

 **NEWFIELD**
Exploration Company

Federal 14-25-8-15
SEC. 25, T8S, R15E, S.L.B.&M.

 **Tri-State**
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078


SCALE: 1" = 2,000'
DRAWN BY: JAS
DATE: 06-16-2009

Legend

-  Existing Road
-  Proposed Access

TOPOGRAPHIC MAP


"B"

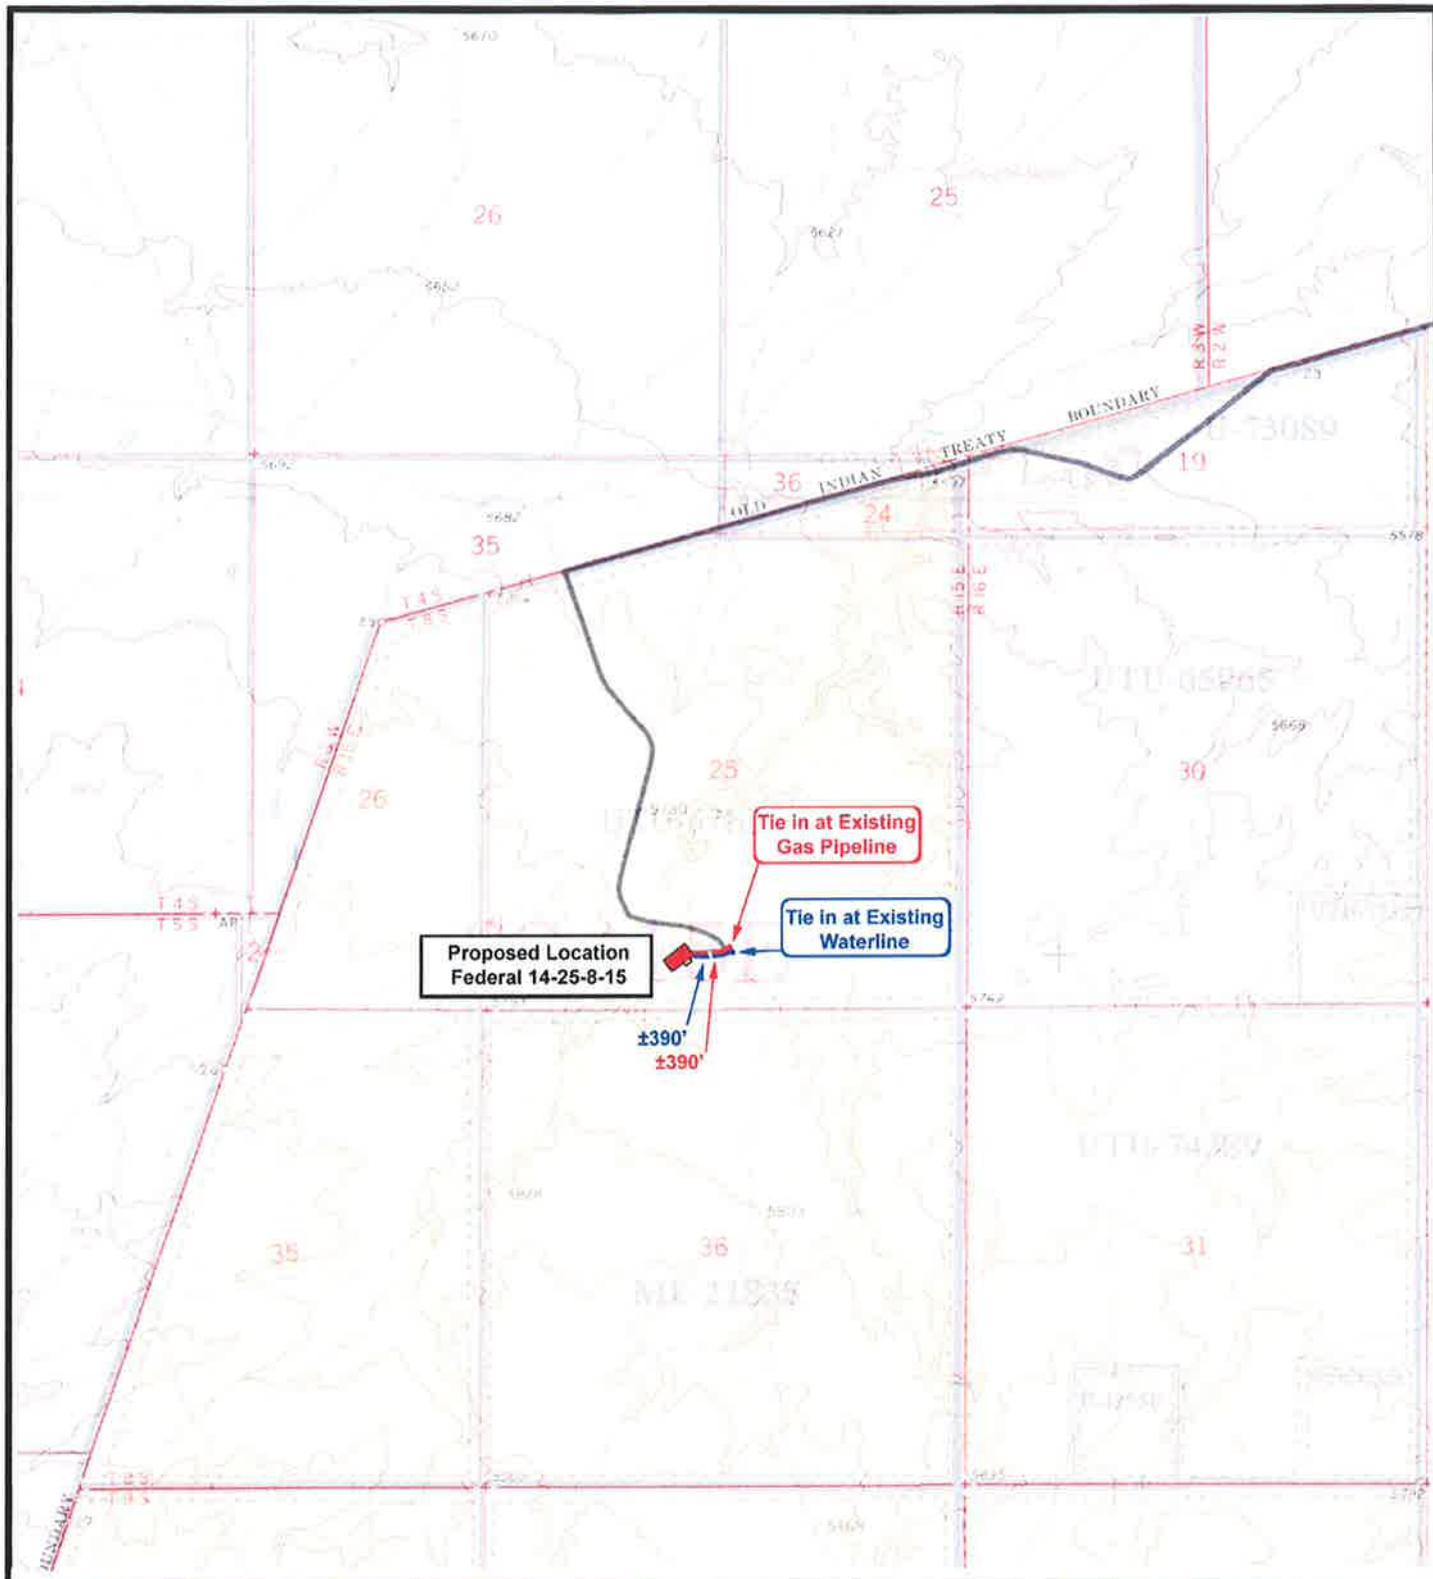


 <p>NEWFIELD Exploration Company</p>
<p>Federal 14-25-8-15 SEC. 25, T8S, R15E, S.L.B.&M.</p>

	 <p>Tri-State <i>Land Surveying Inc.</i> (435) 781-2501 180 North Vernal Ave. Vernal, Utah 84078</p>
<p>SCALE: 1" = 2,000'</p>	
<p>DRAWN BY: JAS</p>	
<p>DATE: 06-16-2009</p>	

<p>Legend</p>
<p> Roads</p>
<p> Proposed Gas Line</p>
<p> Proposed Water Line</p>
<p>TOPOGRAPHIC MAP</p>
<p>"C"</p>

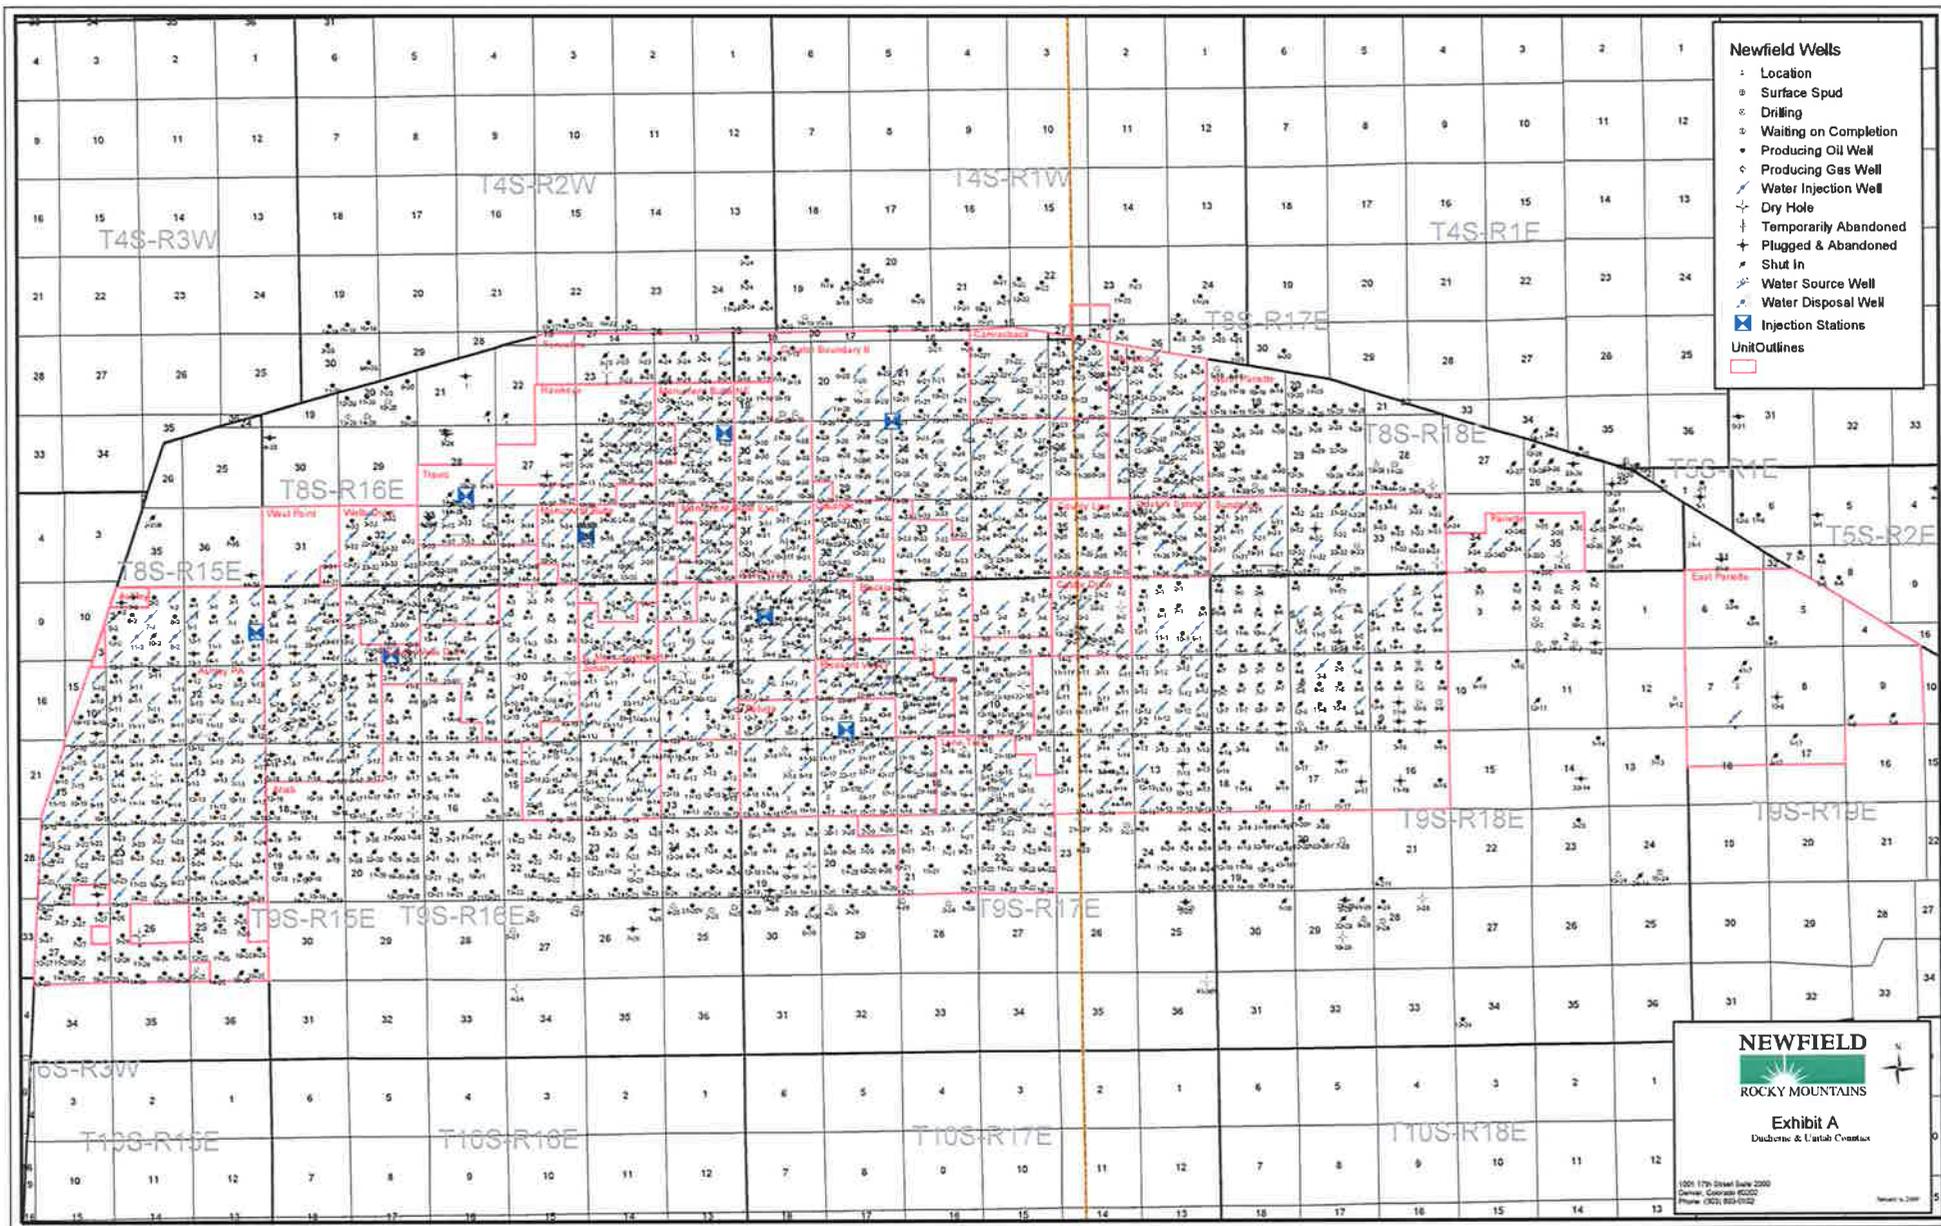

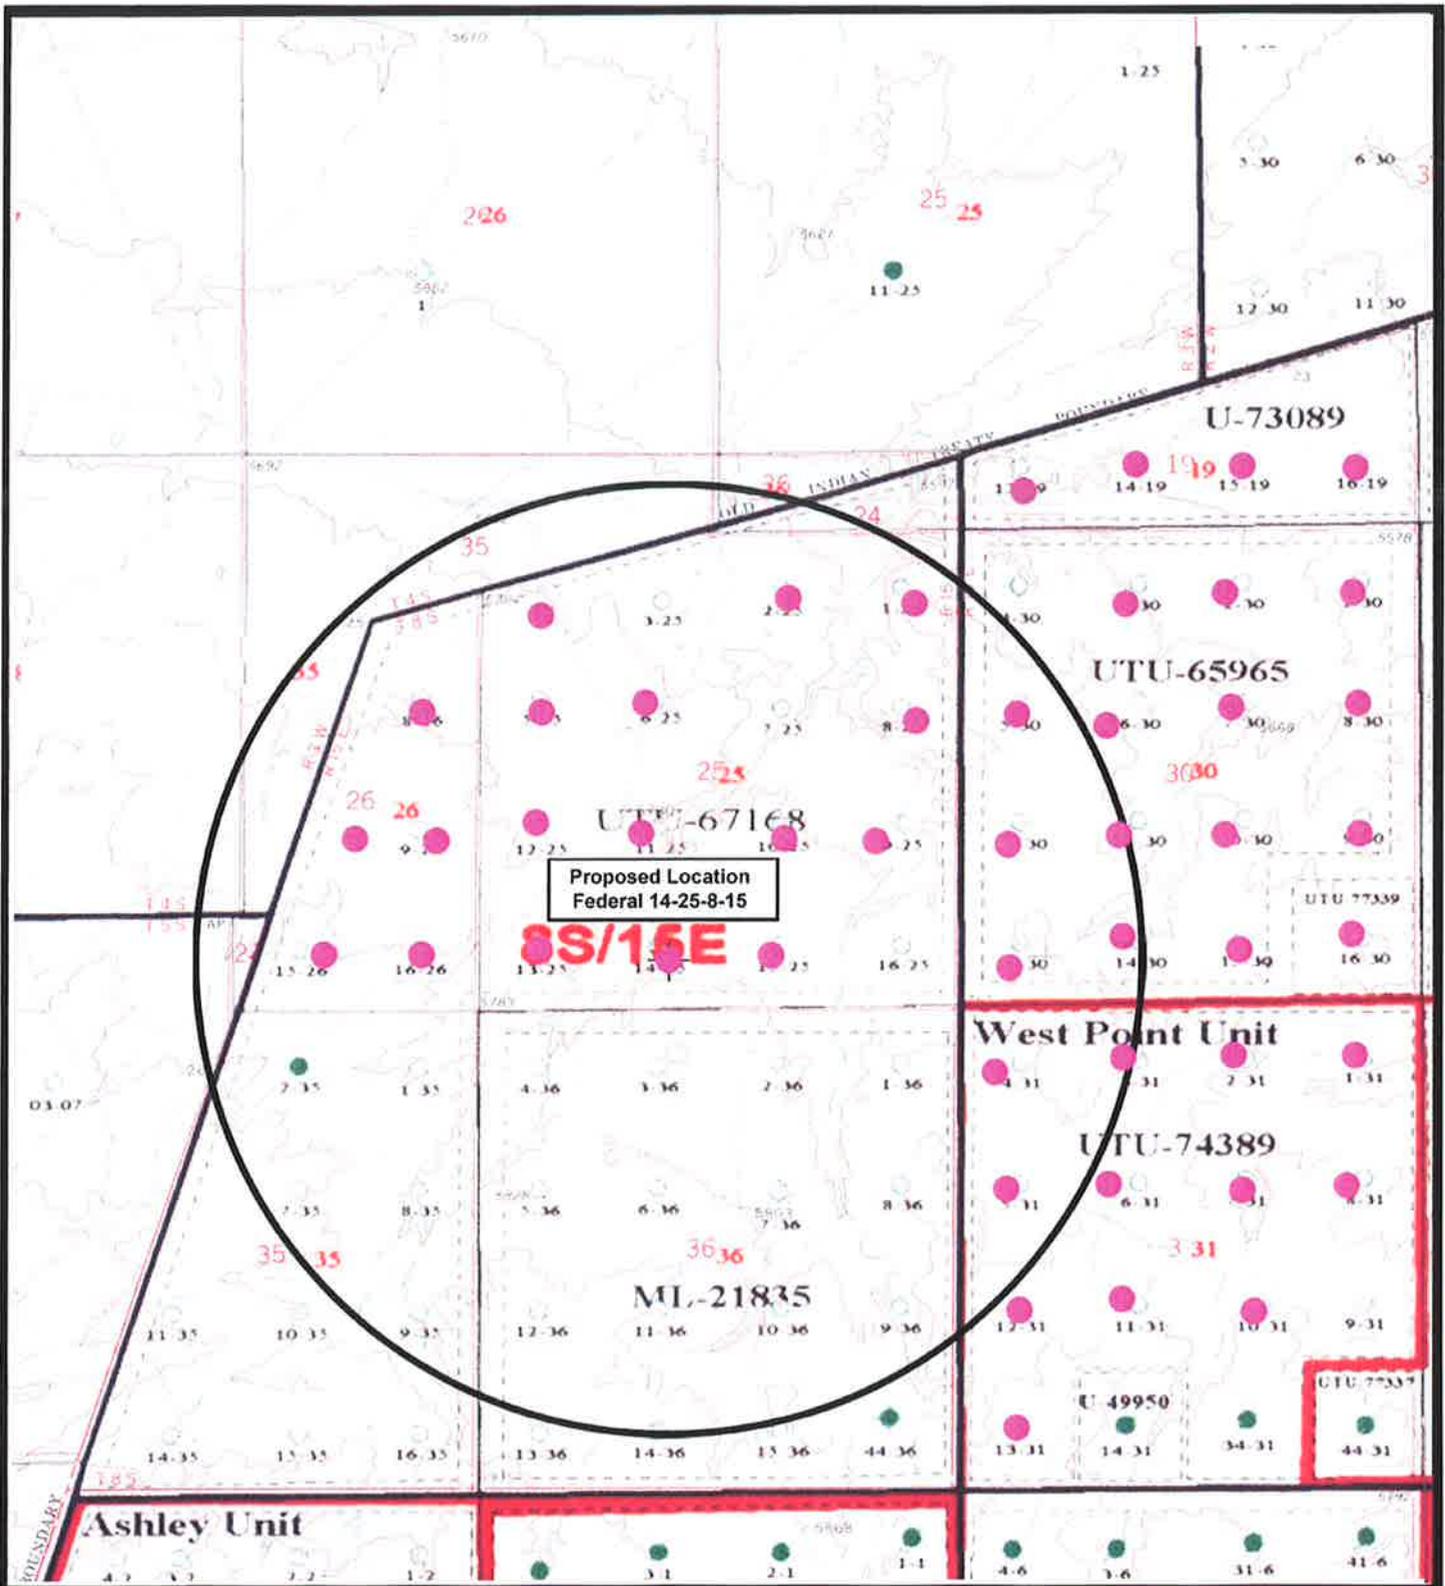



NEWFIELD
Exploration Company

Federal 14-25-8-15
SEC. 25, T8S, R15E, S.L.B.&M.





Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'
DRAWN BY: JAS
DATE: 06-16-2009

Legend


- Pad Location
- One-Mile Radius

Exhibit "B"

NEWFIELD PRODUCTION COMPANY

FEDERAL 14-25-8-15

Section 25, T8S, R15E, S.L.B.&M.

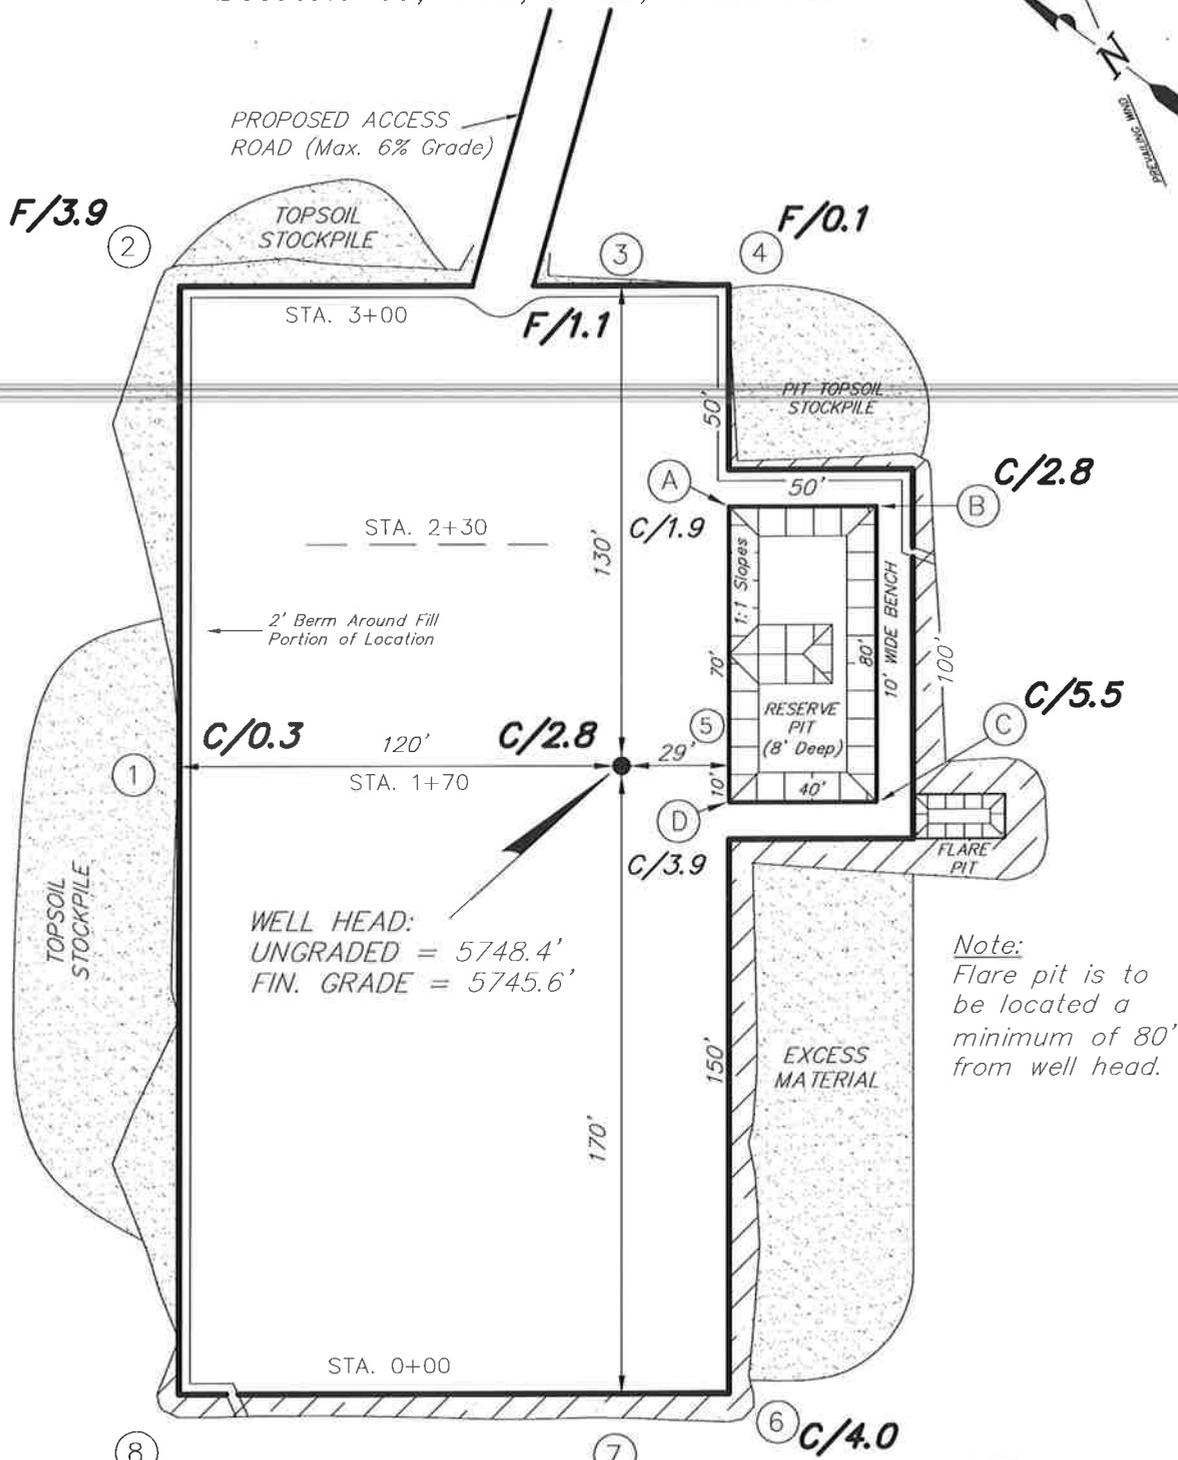

Note:
Flare pit is to be located a minimum of 80' from well head.





REFERENCE POINTS

220' SOUTHWEST	5752.1'
270' SOUTHWEST	5752.2'
170' NORTHWEST	5739.5'
220' NORTHWEST	5729.0'

SURVEYED BY: D.P.	DATE SURVEYED: 11-08-08
DRAWN BY: M.W.	DATE DRAWN: 11-19-08
SCALE: 1" = 50'	REVISED:

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE., VERNAL, UTAH 84078
(435) 781-2501

NEWFIELD PRODUCTION COMPANY
CROSS SECTIONS
FEDERAL 14-25-8-15

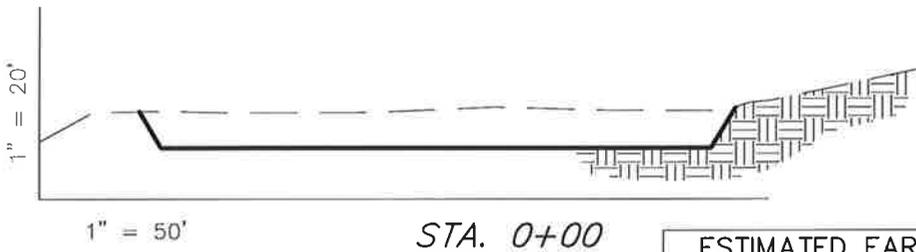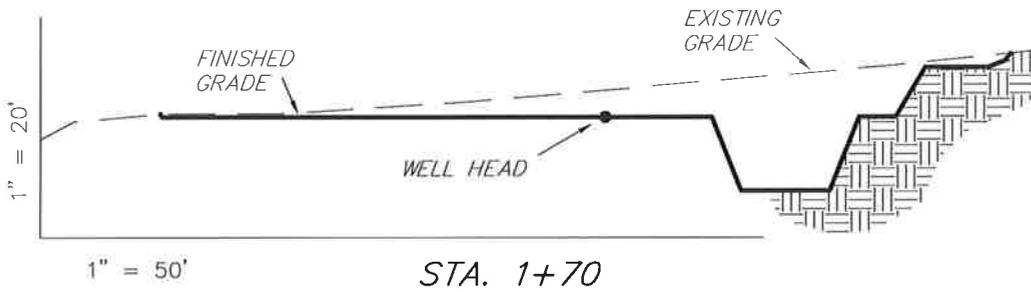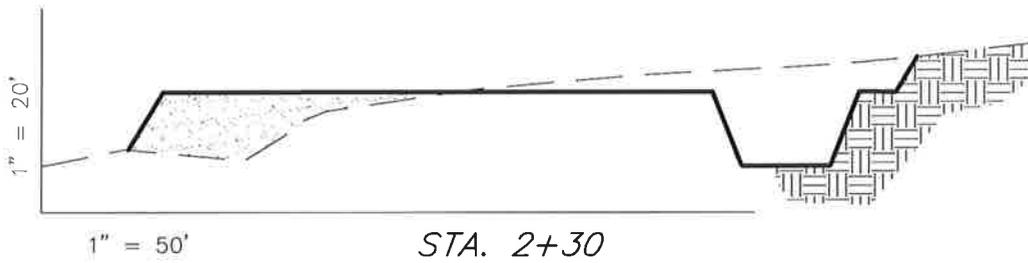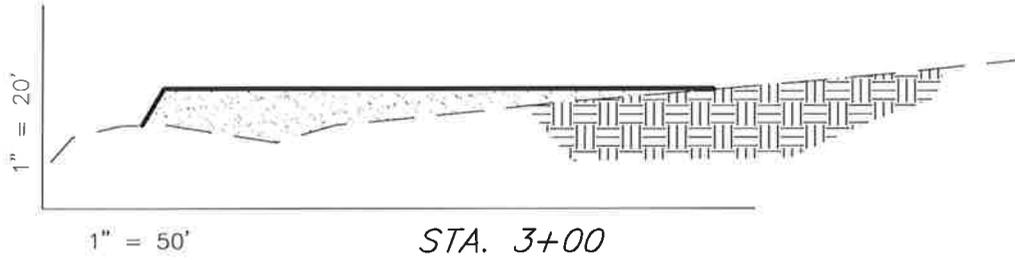

NOTE:
 UNLESS OTHERWISE
 NOTED ALL CUT/FILL
 SLOPES ARE AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES
 (No Shrink or swell adjustments have been used)
 (Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	2,780	2,780	Topsoil is not included in Pad Cut	0
PIT	640	0		640
TOTALS	3,420	2,780	1,050	640


SURVEYED BY: D.P.	DATE SURVEYED: 11-08-08
DRAWN BY: M.W.	DATE DRAWN: 11-19-08
SCALE: 1" = 50'	REVISED:

Tri State (435) 781-2501
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD PRODUCTION COMPANY

TYPICAL RIG LAYOUT

FEDERAL 14-25-8-15

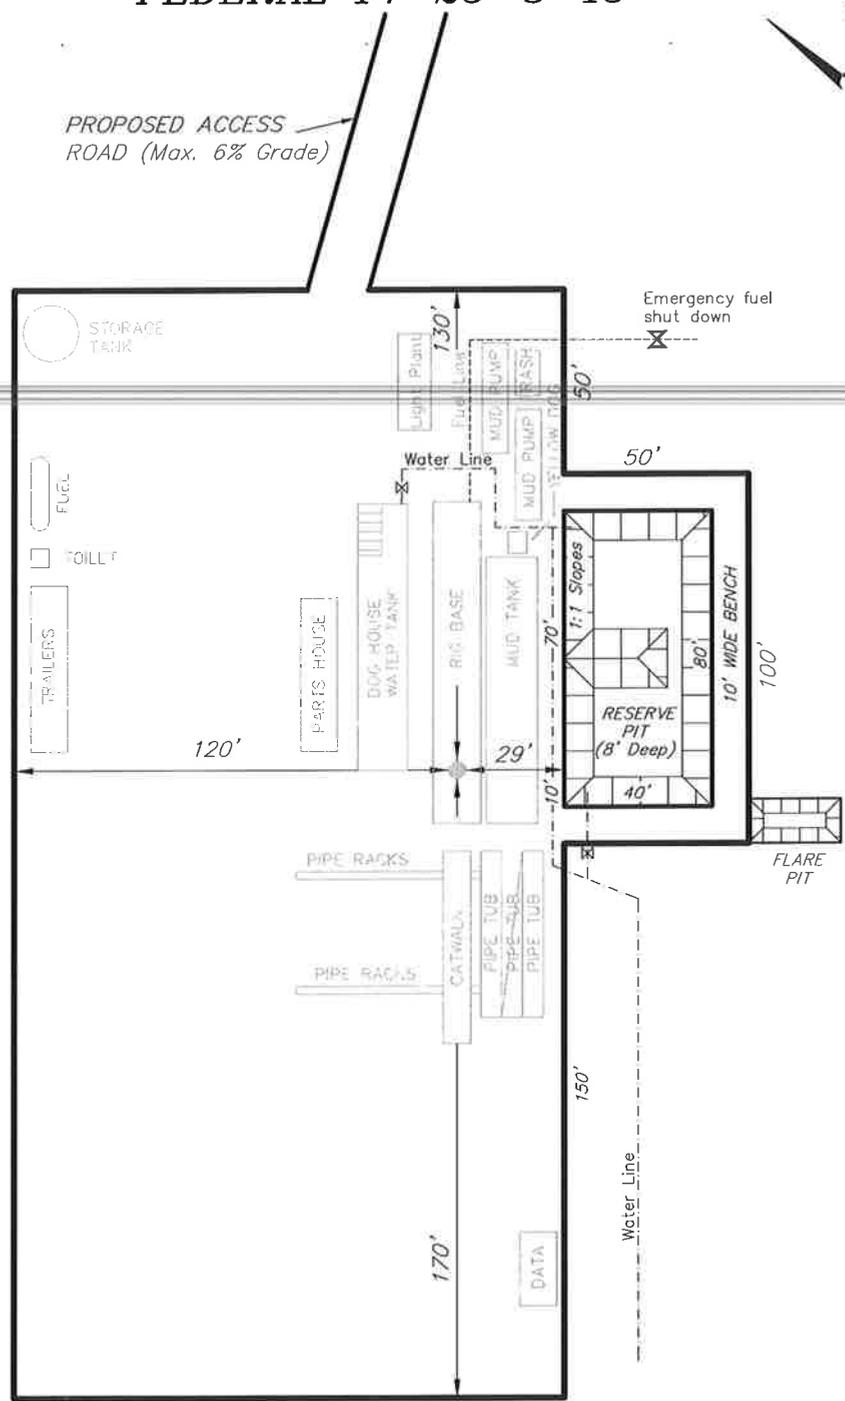

SURVEYED BY: D.P.	DATE SURVEYED: 11-08-08
DRAWN BY: M.W.	DATE DRAWN: 11-19-08
SCALE: 1" = 50'	REVISED:

Tri State
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078
 (435) 781-2501

**NEWFIELD PRODUCTION COMPANY
FEDERAL 14-25-8-15
SE/SW SECTION 25, T8S, R15E
DUCHESNE COUNTY, UTAH**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site Federal 14-25-8-15 located in the SE 1/4 SW 1/4 Section 25, T8S, R15E, Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.4 miles \pm to the junction of this highway and UT State Hwy 53; proceed southwesterly - 6.4 miles \pm to it's junction with an existing road to the southwest; proceed southwesterly approximately - 2.8 miles \pm to it's junction with an existing road to the southeast; proceed in a southeasterly direction - 0.9 miles \pm to it's junction with the beginning of the proposed access road to the west; proceed westerly along the proposed access road - 390' \pm to the proposed well location.

2. PLANNED ACCESS ROAD

See Topographic Map "B" for the location of the proposed access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

All permanent surface equipment will be painted Carlsbad Canyon.
Please refer to the Monument Butte Field Standard Operating Procedure (SOP).

5. LOCATION AND TYPE OF WATER SUPPLY

Newfield Production will transport water by truck for drilling purposes from the following water sources:

Johnson Water District
Water Right : 43-7478

Neil Moon Pond
Water Right: 43-11787

Maurice Harvey Pond
Water Right: 47-1358

Newfield Collector Well
Water Right: 41-3530 (A30414DV, contracted with the Duchesne County Conservancy District).

Please refer to the Monument Butte Field SOP. See Exhibit "A".

6. **SOURCE OF CONSTRUCTION MATERIALS**

Please refer to the Monument Butte Field SOP.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

Please refer to the Monument Butte Field SOP.

8. **ANCILLARY FACILITIES**

Please refer to the Monument Butte Field SOP.

9. **WELL SITE LAYOUT**

See attached Location Layout Diagram.

10. **PLANS FOR RESTORATION OF SURFACE**

Please refer to the Monument Butte Field SOP.

11. **SURFACE OWNERSHIP** - Bureau Of Land Management (Proposed location and access roads leading to).

12. **OTHER ADDITIONAL INFORMATION**

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. MOAC Report #08-301, 1/26/09. Paleontological Resource Survey prepared by, Wade E. Miller, 3/5/09. See attached report cover pages, Exhibit "D".

Newfield Production Company requests 390' of disturbed area be granted in Lease UTU-67168 to allow for construction of the planned access road. **Refer to Topographic Map "B"**. A permanent width of 30' and a running surface of 18' is proposed for the planned access road. The construction phase of the planned access road will last approximately (5) days. The planned access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%. There will be no culverts required along this access road. There will be barrow ditches and turnouts as needed along this road. There are no fences encountered along this proposed road. There will be no new gates or cattle guards required. All construction material for this access road will be borrowed material accumulated during construction of the access road.

Newfield Production Company requests 390' of disturbed area be granted in Lease UTU-67168 to allow for construction of the proposed surface gas lines. It is proposed that the disturbed area will temporarily be 50' wide to allow for construction of a 10" or smaller gas gathering line, and a 3" poly fuel gas line, with a permanent width of 30' upon completion of the proposed gas lines. The construction phase of the proposed gas lines will last approximately (5) days. Both lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."** For a ROW plan of development, please refer to the Monument Butte Field SOP.

Newfield Production Company requests 390' of disturbed area be granted in Lease UTU-67168 to allow for construction of the proposed water lines. It is proposed that the disturbed area will temporarily be 50' wide to allow for construction of a buried 3" steel water injection line and a buried 3" poly water return line, with a permanent width of 30' upon completion of the proposed water return line. The construction phase of the proposed water lines will last approximately (5) days. **Refer to Topographic Map "C."** For a ROW plan of development, please refer to the Monument Butte Field SOP. In the event that the proposed well is converted to a water injection well, a separate injection permit will be applied for through the proper agencies.

Water Disposal

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), State of Utah approved surface disposal facilities, or Federally approved surface disposal facilities.

Threatened, Endangered, And Other Sensitive Species

Mountain Plover: If new construction or surface disturbing activities are scheduled to occur between May 15 and June 15, detailed surveys of the area within 0.5 mile of the proposed location and within 300 feet of proposed access routes must be conducted to detect the presence of mountain plovers. All surveys must be conducted in accordance with the survey protocols outlined in the most recent USFWS Survey Protocol. Surveys must be completed prior to initiating new construction or surface disturbing activities. No new construction or surface disturbing activities will be allowed between May 15 and June 15 within a 0.5 mile radius of any documented mountain plover nest site.

Reserve Pit Liner

A 16 mil liner with felt is required. Please refer to the Monument Butte Field SOP.

Location and Reserve Pit Reclamation

Please refer to the Monument Butte Field SOP.

The following seed mixture will be used on the topsoil stockpile, to the recontoured surface of the reserve pit, and for final reclamation: (All poundages are in pure live seed)

Squirrell Tail	<i>Elymus Elymoides</i>	6 lbs/acre
Siberian Wheatgrass	<i>Agropyron Fragile</i>	2 lbs/acre
Gardner Saltbush	<i>Atriplex Gardneri</i>	1 lbs/acre
Shadscale	<i>Atriplex Confertifolia</i>	1 lbs/acre
Fourwing Saltbush	<i>Atriplex Canescens</i>	1 lbs/acre
Scarlet Globemallow	<i>Sphaeralcea Conccinea</i>	0.20 lbs/acre
Forage Kochia	<i>Kochia Prostrata</i>	0.20 lbs/acre

Details of the On-Site Inspection

The proposed Federal 14-25-8-15 was on-sited on 12/10/08. The following were present; Tim Eaton (Newfield Production), Christine Cimiluca (Bureau of Land Management), and James Herford (Bureau of Land Management). Ground cover was 30% open.

LESSEE'S OR OPERATORS REPRESENTATIVE AND CERTIFICATION

Representative

Name: Dave Allred
Address: Route #3 Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification


Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #14-25-8-15 SE/SW Section 25, Township 8S, Range 15E: Lease UTU-67168 Duchesne County, Utah: and is responsible under the terms and conditions of the lease for the

operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #WYB000493.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

6/15/09

Date



Mandie Crozier
Regulatory Specialist
Newfield Production Company


Newfield Production Company Proposed Site Facility Diagram

Federal 14-25-8-15

SE/SW Sec. 25, T8S, R15E

Duchesne County, Utah

UTU-67168

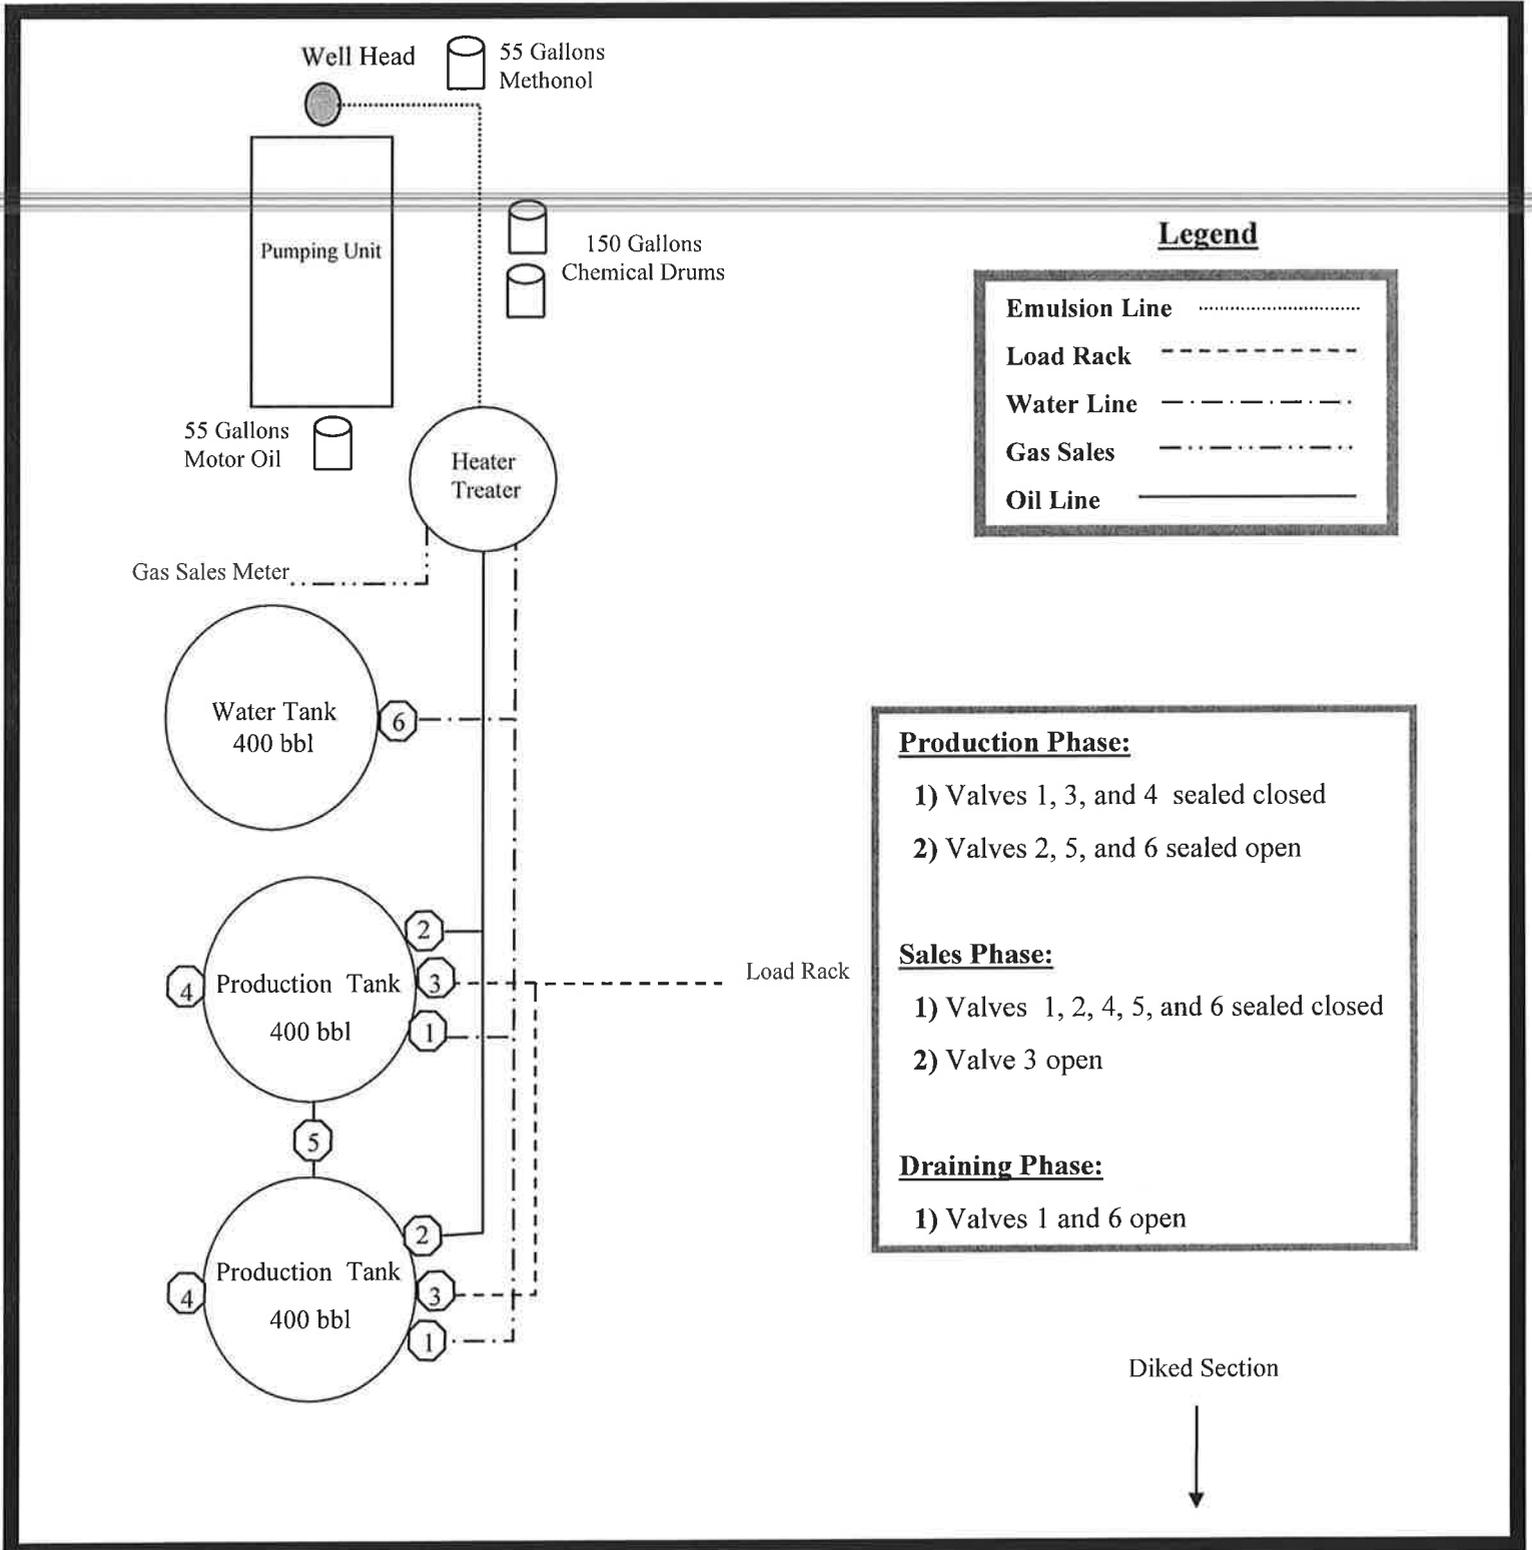

Legend

Emulsion Line
Load Rack	-----
Water Line	-.-.-.-
Gas Sales
Oil Line	————

Production Phase:

- 1) Valves 1, 3, and 4 sealed closed
- 2) Valves 2, 5, and 6 sealed open

Sales Phase:

- 1) Valves 1, 2, 4, 5, and 6 sealed closed
- 2) Valve 3 open

Draining Phase:

- 1) Valves 1 and 6 open

Exhibit "D"

1 of 2

CULTURAL RESOURCE INVENTORY OF
NEWFIELD EXPLORATION'S FOUR BLOCK PARCELS
(T8S, R15E, SECTIONS 25, 26, 35, AND 36)
DUCHESNE COUNTY, UTAH

By:

Nicole Shelnut

Prepared For:

Bureau of Land Management
Vernal Field Office
and
School & Institutional
Trust Lands Administration

Prepared Under Contract With:

Newfield Exploration Company
Rt. 3 Box 3630
Myton, UT 84052

Prepared By:

Montgomery Archaeological Consultants, Inc.
P.O. Box 219
Moab, Utah 84532

MOAC Report No. 08-301

January 26, 2009

United States Department of Interior (FLPMA)
Permit No. 08-UT-60122

State of Utah Antiquities Project (Survey)
Permit No. U-08-MQ-1227b,s

NEWFIELD EXPLORATION COMPANY

**PALEONTOLOGICAL SURVEY OF PROPOSED
PRODUCTION DEVELOPMENT AREAS,
DUCHESNE & UINTAH COUNTIES, UTAH
(Includes Water Pipeline Surveys)**

Section 36 [Entire Section, excluding SW 1/4, NE 1/4 & SE 1/4, SE 1/4 (7 & 16-36-8-15)];
Section 25 [Entire Section]; Section 26 [SE 1/4, NE 1/4, & SE 1/4 (8, 9, 10 ,15 & 16-26-8-15)];
Section 35 [NE 1/4, SE 1/4 & SW 1/4, NE 1/4 (1, 7 & 8-35-8-15), SE 1/4, NW 1/4 (6-35-8-15),
NE 1/4 & SE 1/4, SW 1/4 (11 & 14-35-8-15), & SE 1/4 (9, 10, 15 & 16-35-8-15)]. NE 1/4 & SE
1/4, Section 32, T 8 S, R 17 E (11 & 14-32-8-17); NE 1/4, SE 1/4, Section 6, T 9 S, R 19 E (43-
6-9-19); NE 1/4, SE 1/4, Section 7, T 9 S, R 17 E (43-7-9-17); SE 1/4, SE 1/4, Section 4, T 9 S,
R 16 E (16-4-9-16)

REPORT OF SURVEY

Prepared for:

Newfield Exploration Company



Prepared by:

Wade E. Miller
Consulting Paleontologist
March 5, 2009

API Number: 4301350050
Well Name: Federal 14-25-8-15
Township 08.0 S Range 15.0 E Section 25
Meridian: SLBM
 Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared:
 Map Produced by Diana Mason

Units	Wells Query Events
STATUS	<call other values>
ACTIVE	EXPLO
EXPLORATORY	GAS STORAGE
NF PP OIL	NF SECONDARY
PI OIL	PP GAS
PP GAS	PP GEOTHERM
PP OIL	SECONDARY
TERMINATED	
Fields	
ACTIVE	ACTIVE
COMBINED	COMBINED
Sections	Sections
	<Multi>
	APD
	DRL
	GI
	GS
	LA
	NEW
	OPS
	PA
	PGW
	POW
	RET
	SGW
	SOW
	TA
	TW
	WD
	WI
	WS

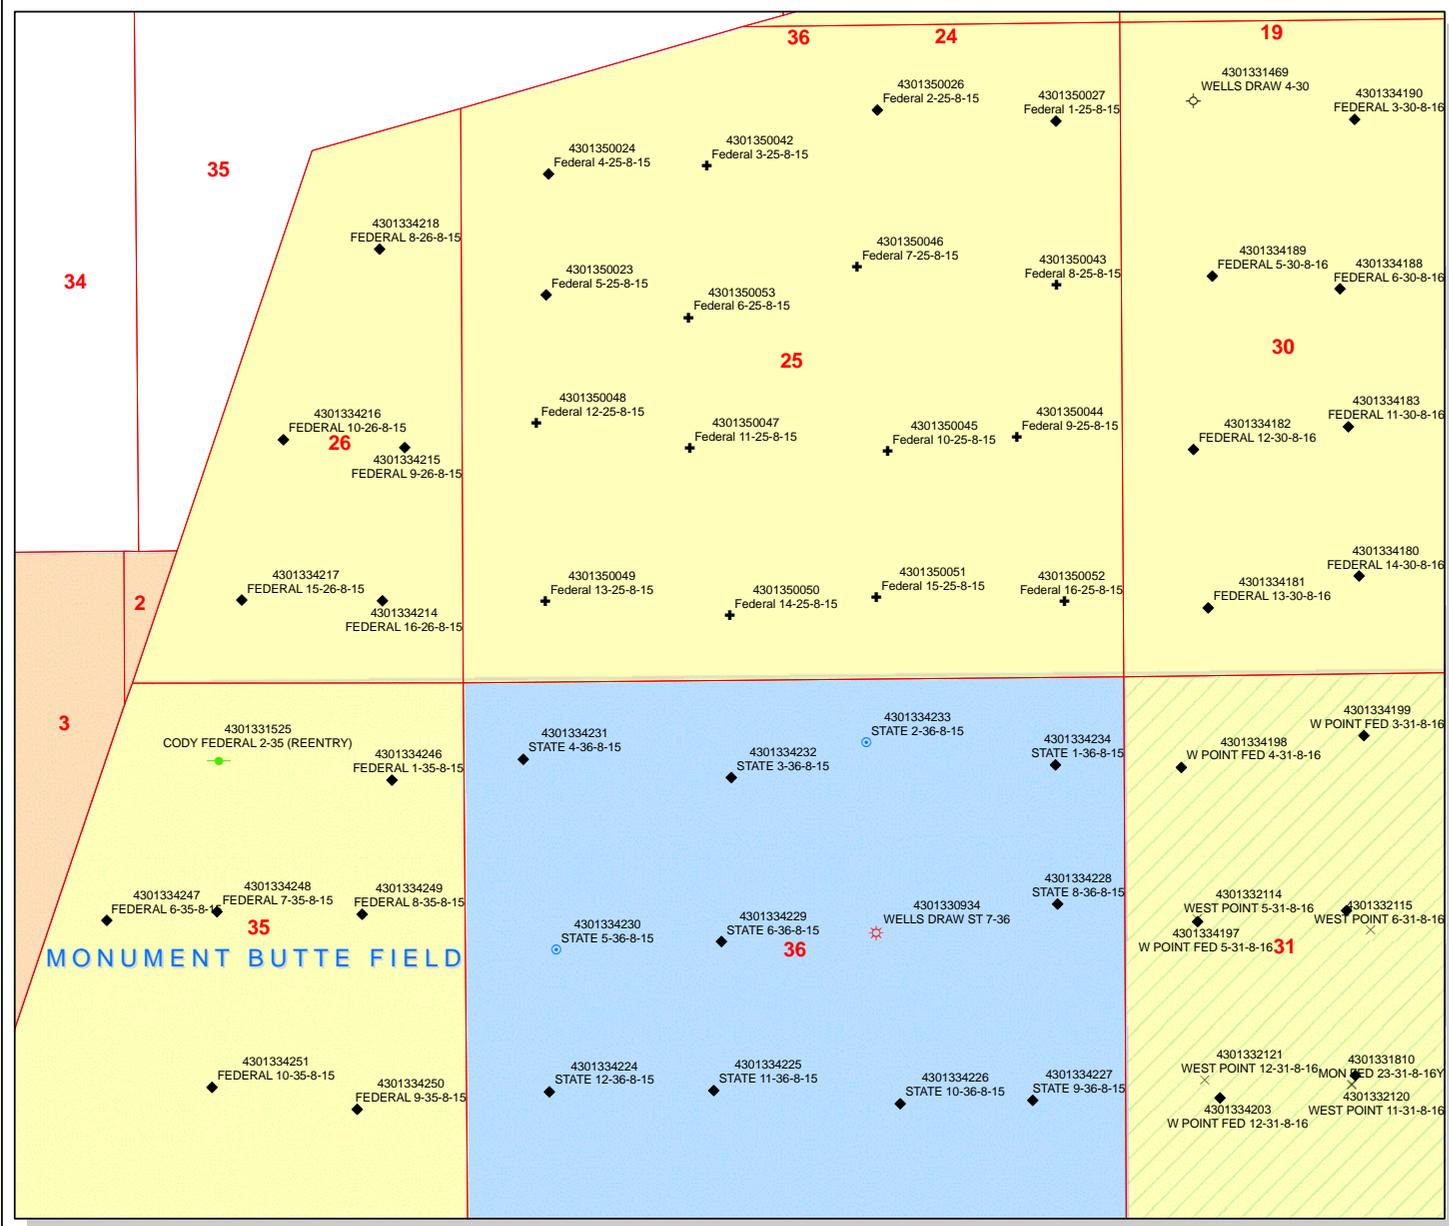

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 6/16/2009

API NO. ASSIGNED: 43013500500000

WELL NAME: Federal 14-25-8-15

OPERATOR: NEWFIELD PRODUCTION COMPANY (N2695)

PHONE NUMBER: 435 646-4825

CONTACT: Mandie Crozier

PROPOSED LOCATION: SESW 25 080S 150E

Permit Tech Review:

SURFACE: 0546 FSL 2144 FWL

Engineering Review:

BOTTOM: 0546 FSL 2144 FWL

Geology Review:

COUNTY: DUCHESNE

LATITUDE: 40.08319

LONGITUDE: -110.18161

UTM SURF EASTINGS: 569775.00

NORTHINGS: 4437101.00

FIELD NAME: UNDESIGNATED

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-67168

PROPOSED PRODUCING FORMATION(S): GREEN RIVER

SURFACE OWNER: 1 - Federal

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

- PLAT**
- Bond:** FEDERAL - WYB000493
- Potash**
- Oil Shale 190-5**
- Oil Shale 190-3**
- Oil Shale 190-13**
- Water Permit:** 43-7478
- RDCC Review:**
- Fee Surface Agreement**
- Intent to Commingle**

Commingle Approved

LOCATION AND SITING:

- R649-2-3.**
 - Unit:**
 - R649-3-2. General**
 - R649-3-3. Exception**
 - Drilling Unit**
 - Board Cause No:** R649-3-2
 - Effective Date:**
 - Siting:**
 - R649-3-11. Directional Drill**
-

Comments: Presite Completed
IRR SEC:

Stipulations: 4 - Federal Approval - dmason
23 - Spacing - dmason



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: Federal 14-25-8-15
API Well Number: 43013500500000
Lease Number: UTU-67168
Surface Owner: FEDERAL
Approval Date: 6/18/2009

Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of R649-3-2. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

Notification Requirements:

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.


Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281 office (801) 733-0983 home

Reporting Requirements:

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

Approved By:

A handwritten signature in black ink, appearing to read "Gil Hunt". The signature is written in a cursive, flowing style with a long horizontal stroke at the end.

Gil Hunt
Associate Director, Oil & Gas

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-67168
---	--

SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)
--	---

1. TYPE OF WELL Oil Well	8. WELL NAME and NUMBER: Federal 14-25-8-15
------------------------------------	---

2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY	9. API NUMBER: 43013500500000
--	---

3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052	PHONE NUMBER: 435 646-4825 Ext	9. FIELD and POOL or WILDCAT: UNDESIGNATED
--	--	--

4. LOCATION OF WELL FOOTAGES AT SURFACE: 0546 FSL 2144 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 25 Township: 08.0S Range: 15.0E Meridian: S	COUNTY: DUCHESNE STATE: UTAH
---	---

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 6/18/2010 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield proposes to extend the application permit to drill this well for one year.

Approved by the Utah Division of Oil, Gas and Mining

Date: June 23, 2010

By:

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 6/16/2010	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013500500000

API: 43013500500000

Well Name: Federal 14-25-8-15

Location: 0546 FSL 2144 FWL QTR SESW SEC 25 TWNP 080S RNG 150E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 6/18/2009

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

Approved by the Utah Division of Oil, Gas and Mining

Signature: Mandie Crozier

Date: 6/16/2010

Title: Regulatory Tech Representing: NEWFIELD PRODUCTION COMPANY

Date: June 23, 2010

By: [Handwritten Signature]

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-67168
---	--

SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)
--	---

1. TYPE OF WELL Oil Well	8. WELL NAME and NUMBER: Federal 14-25-8-15
------------------------------------	---

2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY	9. API NUMBER: 43013500500000
--	---

3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052	PHONE NUMBER: 435 646-4825 Ext	9. FIELD and POOL or WILDCAT: UNDESIGNATED
--	--	--

4. LOCATION OF WELL FOOTAGES AT SURFACE: 0546 FSL 2144 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 25 Township: 08.0S Range: 15.0E Meridian: S	COUNTY: DUCHESNE STATE: UTAH
---	---

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 6/18/2010 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield proposes to extend the application permit to drill this well for one year.

Approved by the Utah Division of Oil, Gas and Mining

Date: June 23, 2010

By:

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 6/16/2010	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013500500000

API: 43013500500000

Well Name: Federal 14-25-8-15

Location: 0546 FSL 2144 FWL QTR SESW SEC 25 TWNP 080S RNG 150E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 6/18/2009

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Mandie Crozier

Date: 6/16/2010

Title: Regulatory Tech **Representing:** NEWFIELD PRODUCTION COMPANY

Date: June 23, 2010

By:

BLM - Vernal Field Office - ^{Spud} Notification Form

Operator Newfield Exploration Rig Name/# Ross Rig # 29

Submitted By Don Bastian Phone Number 435-823-6012

Well Name/Number Federal 14-25-8-15

Qtr/Qtr SE/SW Section 25 Township 8 S Range 15 E

Lease Serial Number UTU- 67168

API Number 43-013-50050

Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string.

Date/Time 9/7/10 8:00 AM PM

Casing – Please report time casing run starts, not cementing times.

- Surface Casing
- Intermediate Casing
- Production Casing
- Liner
- Other

Date/Time 9/7/10 2:00 AM PM

BOPE

- Initial BOPE test at surface casing point
- BOPE test at intermediate casing point
- 30 day BOPE test
- Other

Date/Time _ _____ AM PM

Remarks Ross Rig #29 Will Spud The Federal 14-25-8-15 @ 8:00 AM On 9/7/10 Run 8 5/8" Casing @ 2:00 PM On 9/7/10

Rachel Medina - RE: "Federal 14-25-8-15" SPUD NOTICE (newfield)

From: "Don Bastian" <dbastian@newfield.com>
To: "Don Bastian" <dbastian@newfield.com>, <ut_vn_opreport@blm.gov>, "Carol ..."
Date: 9/8/2010 4:04 PM
Subject: RE: "Federal 14-25-8-15" SPUD NOTICE (newfield)
CC: "Ray Herrera" <rherrera@newfield.com>, "Ryan Crum" <rccrum@newfield.com>,...

From: Don Bastian
Sent: Monday, September 06, 2010 8:13 AM
To: ut_vn_opreport@blm.gov; Carol Daniels; rachelmedina@utah.gov
Cc: Ray Herrera; Ryan Crum; Johnny Davis; Justin Crum; Jay Burton; Jim Smith; Don Bastian; Alvin Nielsen; Sean Stevens; Xabier Lasa
Subject: "Federal 14-25-8-15" SPUD NOTICE (newfield)

Operator: Newfield Production Company
Well Name: Federal 14-25-8-15
Rig: Ross Rig #29
Legals: SE/SW Sec.25 T8S R15E
Lease #: UTU- 67168
API #: 43- 013 - 500050
Contact: Don Bastian 435-823-6012

Est. spud time: 8:00 AM 9/ 9 /10
Est. run 8-5/8" csg: 2:00 PM 9/ 9 /10
Est. cement surface csg:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other Instructions on page 2

1. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. UTU-67168
2. Name of Operator NEWFIELD PRODUCTION COMPANY		6. If Indian, Allottee or Tribe Name.
3a. Address Route 3 Box 3630 Myton, UT 84052	3b. Phone (include are code) 435.646.3721	7. If Unit or CA/Agreement, Name and/or GMBU
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 0546 FSL 2144 FWL SESW Section 25 T8S R15E		8. Well Name and No. FEDERAL 14-25-8-15
		9. API Well No. 4301350050
		10. Field and Pool, or Exploratory Area GREATER MB UNIT
		11. County or Parish, State DUCHESNE, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

(A) TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____ Spud Notice
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 9/9/10 MIRU Ross # 29 .Spud well @ 8:00am. Drill 350' of 12 1/4" hole with air mist. TIH W/ 8 Jt's 8 5/8" J-55 24 # csgn. Set @ 352.86' On 9/11/10 cement with 170 sks of class "G" w/ 2% CaCL2 + 1/4# sk Cello- Flake Mixed @ 15.8 ppg > 1.17 cf/ sk yeild. Returned 4 bbls cement to pit. WOC.

I hereby certify that the foregoing is true and correct (Printed/ Typed) Don Bastian	Title Drilling Foreman
Signature <i>Don Bastian</i>	Date 09/17/2010

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on page 2)

RECEIVED

SEP 22 2010

DIV. OF OIL, GAS & MINING

STATE OF UTAH
 DIVISION OF OIL, GAS AND MINING
 ENTITY ACTION FORM -FORM 6

OPERATOR: NEWFIELD PRODUCTION COMPANY
 ADDRESS: RT. 3 BOX 3630
MYTON, UT 84052

OPERATOR ACCT. NO. N2695

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
B	99999	17400	4301334175	FEDERAL 5-29-8-16	SWNW	29	8S	16E	DUCHESNE	9/14/2010	10/11/10
WELL 1 COMMENTS: GRRV											
B	99999	17400	4301334185	FEDERAL 9-30-8-16	NESE	30	8S	16E	DUCHESNE	9/13/2010	10/11/10
GRRV											
B	99999	17400	4301350046	FEDERAL 7-25-8-15	SWNE	25	8S	15E	DUCHESNE	9/14/2010	10/11/10
GRRV											
B	99999	17400	4301350050	FEDERAL 14-25-8-15	SESW	25	8S	15E	DUCHESNE	9/9/2010	10/11/10
GRRV											
A	99999	17794	4301350340	UTE TRIBAL 9-22-4-3	NESE	22	4S	3W	DUCHESNE	9/13/2010	10/11/10
WELL 5 COMMENTS: GRRV											
A	99999	17795	4301350345	UTE TRIBAL 8-23-4-3	SENE	23	4S	3W	DUCHESNE	9/15/2010	10/11/10
WELL 5 COMMENTS: GRRV											

- ACTION CODES (See instructions on back of form)
- A - 1 new entity for new well (single well only)
 - B - well to existing entity (group or unit well)
 - C - from one existing entity to another existing entity
 - D - well from one existing entity to a new entity
 - E - other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

RECEIVED
 SEP 23 2010

Signature: Jentri Park
 Production Clerk
 Date: 09/22/10

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

5. LEASE DESIGNATION AND SERIAL NUMBER:
UTU-67168

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:
GMBU

1. TYPE OF WELL: OIL WELL GAS WELL OTHER

8. WELL NAME and NUMBER:
FEDERAL 14-25-8-15

2. NAME OF OPERATOR:
NEWFIELD PRODUCTION COMPANY

9. API NUMBER:
4301350050

3. ADDRESS OF OPERATOR:
Route 3 Box 3630 CITY Myton STATE UT ZIP 84052

PHONE NUMBER
435.646.3721

10. FIELD AND POOL, OR WILDCAT:
GREATER MB UNIT

4. LOCATION OF WELL:
FOOTAGES AT SURFACE:

COUNTY: DUCHESNE

OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: SESW, 25, T8S, R15E

STATE: UT

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARITLY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: 10/08/2010	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/STOP)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: - Weekly Status Report
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
The above subject well was completed on 10/08/2010, attached is a daily completion status report.

NAME (PLEASE PRINT) Monica Bradley

TITLE Office Services Assistant

SIGNATURE Monica Bradley

DATE 10/11/2010

(This space for State use only)

RECEIVED

OCT 14 2010

DIV. OF OIL, GAS & MINING

Daily Activity Report

Format For Sundry

FEDERAL 14-25-8-15

8/1/2010 To 12/30/2010

9/28/2010 Day: 1

Completion

Rigless on 9/28/2010 - Test casing to 4500 psi. CBL/Perferate 1st stage. - RU frac head & Cameron BOP's. RU Hot Oiler & test casing, frac head w/ valves & BOP's to 4500 psi. RU Perforators LLC WLT w/ mast & run CBL under pressure. WLTD was 6504' w/ cement top @ 102'. RIH bw/ 3-1/8" Port Guns (11 gram, .36"EH, 120°, 16.82") & perferate CP5 sds @ 6105-09', 6069-6072' w/ 3 spf for total of 21 shots. SIFN w/ 159 bbls EWTR.

Daily Cost: \$0

Cumulative Cost: \$12,525

9/30/2010 Day: 2

Completion

Rigless on 9/30/2010 - Frac stg #1. Perforate & frac stg #2. Perforate stg #3 - MIRU The Perforators WLT & crane. RU BJ Services frac equipment. Frac stg #1. Perforate & frac stg #2. Perforate stg #3. SDFN

Daily Cost: \$0

Cumulative Cost: \$12,825

10/1/2010 Day: 3

Completion

Rigless on 10/1/2010 - Frac remaining stgs. Flowback well. Set kill plug - Open well. CSG 826 psi. Break down stg #3 perfs. Frac stg #3. Perforate & frac stgs #4 & 5. RD The Perforators WLT & crane. RD BJ Services frac equipment. EWTR 2006 BBLs. RU flowback equipment. Open well to pit for flowback @ 9:40 AM. Flowback well for 3.5 hrs to recover 420 BBLs. Turned to oil. Shut in well. Wait on wireline truck. RU The Perforators WLT & crane. RIH w/ wireline. Set kill plug @ 4370'. POOH w/ wireline. RD WLT & crane. Wait on surface unit for completion. EWTR 1586 BBLs.

Daily Cost: \$0

Cumulative Cost: \$106,238

10/4/2010 Day: 4

Completion

NC #2 on 10/4/2010 - MIRUSU, P/U Tbg, Start To Drill Plgs - 5:30 To 6:00 AM C/Trvl, 6:00 AM MIRUSU, OWU, R/D Cameron BOPS, R/U Weatherford BOPS, P/U & TIH W/- Bit & Bit Sub, 139- Jts Tbg To Plg # 1 @ 4370', R/U RBS Pwr Swvl, Drill Out Plg, 32 Min Drill Time, Swvl In The Hole To Plg # 2, Drill Out Plg, 30 Min Drill Time, Circ Well Clean, SWI, CSDFN @ 7:00 PM, 7:00 To 7:30 PM C/Trvl.

Daily Cost: \$0

Cumulative Cost: \$151,374

10/5/2010 Day: 5

Completion

NC #2 on 10/5/2010 - Finish Drilling Out Plgs, Swab Well - 5:30 To 6:00 AM C/Trvl, 6:00 AM OWU, Swvl In The Hole To Plg # 3 @ 5120', Drill Out Plg, 33 Min Drill Time, Swvl In The Hole T Plg # 4 @ 5583' Drill Out Plg, 31 Min Drill Time, Swvl In The Hole T Plg # 5 @ 6008', Drill Out Plg, 36 Min Drill Time, Swvl In The Hole To PBSD @ 6504', Circ Well Clean For Approx. 1

Hr, We Lost Approx. 70 Bbls Wtr, POOH W/- 5 Jts Tbg, R/U Sandline, Swab Well, Swab Back
Approx. 170 Bbls Fluid, SWI, CSDFN @ 7:00 PM, 7:00 To 7:30 PM C/Trvl.

Daily Cost: \$0

Cumulative Cost: \$161,282

10/6/2010 Day: 6

Completion

NC #2 on 10/6/2010 - Try To Kill Well, Meachanic On NC #2 - 5:30 To 6:00 AM C/Trvl, 6:00 AM OWU, Csg Was Flowing, Tbg Was Flowing A Little Bit, R/U Rig Pmp To Tbg, Try To Kill Well, Well Would Not Die, Ordered Brine Wtr, Pmp 40 Bbls Brine Wtr, Kill Tbg, Went To TIH W/- 5 Jts Tbg, Found A Problem W/- Hydraulics System On Rig, Circ Well While Trying To Fix Problem, Lost Approx. 80 Bbls Brine, SWI, CSDFN @ 7:00 PM, 7:00 To 7:30 PM C/Trvl

Daily Cost: \$0

Cumulative Cost: \$169,562

10/7/2010 Day: 7

Completion

NC #2 on 10/7/2010 - Mechanic On NC #2, Round Trip Tbg, Start To TIH W/- Rod String - 5:30 To 6:00 AM C/Trvl, 6:00 AM OWU, Both Sides Were Dead, TIH W/- 5 Jts Tbg, Circ Well Clean For Approx. 1 Hr, L/D 12 Jts Tbg, POOH W/- 196 Jts Tbg, Bit Sub & Bit, P/U & TIH W/- NC, 2- Jts Tbg, SN, 2- Jts Tbg, TA, 192- Jts Tbg, Set TA In 18000 Lbs Tension, R/D Weatherford BOPS, R/U Wellhead, X - Over For Rods, SWI, CSDFN @ 7:00 PM, 7:00 To 7:30 PM C/Trvl.

Daily Cost: \$0

Cumulative Cost: \$173,726

10/8/2010 Day: 8

Completion

NC #2 on 10/8/2010 - TIH W/- Rod String, PWOP - 5:30 To 6:00 AM C/Trvl, 6:00 AM OWU, P/U & Stroke Test W/- 2 1/2 x 1 1/2 x 21 x 24' RHAC Central Hydraulics Rod Pmp (Max STL 230"), TIH W/- Pmp, 6- 1 1/2" x 25' Wt Bars, 20- 3/4" Guided Rods, 118- 3/4" Plain Rods, 98- 7/8" Guided Rods, 1- 6', 1- 2' x 7/8" Pony Subs, 1 1/2" x 26' Polished Rod, R/U Pmp Unit, Fill & Test Tbg To 800 Psi Using Pmp Unit, Good Test, Took 5 Bbls Wtr To Fill, PWOP @ 1:30 PM, 168" STL, 5 SPM. FINAL REPORT **Finalized**

Daily Cost: \$0

Cumulative Cost: \$198,258

Pertinent Files: Go to File List

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well Oil Well Gas Well Dry Other
 b. Type of Completion: New Well Work Over Deepen Plug Back Diff. Resrv.,
 Other: _____

5. Lease Serial No.
UTU-67168

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No.
GMBU

2. Name of Operator
NEWFIELD EXPLORATION COMPANY

8. Lease Name and Well No.
FEDERAL 14-25-8-15

3. Address
1401 17TH ST. SUITE 1000 DENVER, CO 80202

3a. Phone No. (include area code)
(435)646-3721

9. AFI Well No.
43-013-50050

4. Location of Well (Report location clearly and in accordance with Federal requirements)*

At surface 546' FSL & 2144' FWL (SE/SW) SEC. 25, T8S, R15E

At top prod. interval reported below

At total depth 6595'

10. Field and Pool or Exploratory
GREATER MB UNIT

11. Sec., T., R., M., on Block and
Survey or Area SEC. 25, T8S, R15E

12. County or Parish
DUCHESNE

13. State
UT

14. Date Spudded
09/09/2010

15. Date T.D. Reached
09/21/2010

16. Date Completed 10/08/2010
 D & A Ready to Prod.

17. Elevations (DF, RKB, RT, GL)*
5748' GL 5760' KB

18. Total Depth: MD 6595'
TVD

19. Plug Back T.D.: MD 6504'
TVD

20. Depth Bridge Plug Set: MD
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
 DUAL IND GRD, SP, COMP. DENSITY, COMP. NEUTRON, GR, CALIPER, CMT BOND

22. Was well cored? No Yes (Submit analysis)
 Was DST run? No Yes (Submit report)
 Directional Survey? No Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	8-5/8" J-55	24#	0	353'		170 CLASS G			
7-7/8"	5-1/2" J-55	15.5#	0	6587'		275 PRIMLITE		102'	
						450 50/50 POZ			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-7/8"	EOT@6159'	TA @ 6031'						

25. Producing Intervals

Formation	Top	Bottom	Perforation Interval	Size	No. Holes	Perf. Status
A) Green River			6069-6109' CP5	.36"	3	21
B) Green River			5864-5961' CP2 CP4	.36"	3	15
C) Green River			5233-5528' B2 A3 LODC	.36"	3	27
D) Green River			4966-5074' D2 C	.36"	3	21

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Depth Interval	Amount and Type of Material
6069-6109'	Frac w/ 19891#'s 20/40 sand in 173 bbls of Lightning 17 fluid.
5864-5961'	Frac w/ 19679#'s 20/40 sand in 168 bbls of Lightning 17 fluid.
5233-5528'	Frac w/ 65477#'s 20/40 sand in 403 bbls of Lightning 17 fluid.
4966-5074'	Frac w/ 40578#'s 20/40 sand in 265 bbls of Lightning 17 fluid.

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
10-9-10	10-24-10	24	→	179	162	23			2-1/2" x 1-1/2" x 21' x 24' RHAC Pump
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→					PRODUCING	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

RECEIVED

NOV 08 2010

*(See instructions and spaces for additional data on page 2)

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

29. Disposition of Gas (Solid, used for fuel, vented, etc.)

SOLD & USED FOR FUEL

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

GEOLOGICAL MARKERS

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
GREEN RIVER	4432'	6109'		GARDEN GULCH MRK	3836'
				GARDEN GULCH 1	4066'
				GARDEN GULCH 2	4184'
				POINT 3	4461'
				X MRKR	4727'
				Y MRKR	4762'
				DOUGALS CREEK MRK	4880'
				BI CARBONATE MRK	5129'
				B LIMESTON MRK	5257'
				CASTLE PEAK	5779'
				BASAL CARBONATE	6200'
				WASATCH	6328'

32. Additional remarks (include plugging procedure):


Stage 5: Green River Formation (GB6) 4432-4437', .36" 3/15 Frac w/ 20928#s of 20/40 sand in 181 bbls of Lightning 17 fluid

RECEIVED
NOV 08 2010
DIV. OF OIL, GAS & MINING

33. Indicate which items have been attached by placing a check in the appropriate boxes:

- Electrical/Mechanical Logs (1 full set req'd.)
 Geologic Report
 DST Report
 Directional Survey
 Sundry Notice for plugging and cement verification
 Core Analysis
 Other: Drilling Daily Activity

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Lucy Chavez-Naupoto Title Administrative Assistant
 Signature  Date 11/01/2010

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Daily Activity Report

Format For Sundry

FEDERAL 14-25-8-15**7/1/2010 To 11/30/2010****FEDERAL 14-25-8-15****Waiting on Cement****Date:** 9/16/2010

Ross #29 at 350. Days Since Spud - BLM & State Were notified via email Of Spud on 9/8/10 - Returned 4 bbls to pit. - 8 5/8" casing w/ 170 sks Class G + 2% Calcium Chloride +.25# Cello flake @15.8 ppg W/ 1.17 yield - Casing (Guide Shoe,shoe jt,baffel plate,7 jts)Set @ 352.85'/KB. On 9/11/10 BJ Services Cemented - On 9/9/10 Ross Rig #29 Spud The Federal 10-25-8-15 Drilled 350' of 12 1/4" hole,ran 8 jts of 8 5/8"

Daily Cost: \$0**Cumulative Cost:** \$65,250**FEDERAL 14-25-8-15****Drill 7 7/8" hole with fresh water****Date:** 9/18/2010

NDSI #2 at 941. 1 Days Since Spud - P/U BHA as Follows.Security FX55M 7 7/8" PDC bit, 6.5" Hunting7/8 4.8 .33 Rev 1.5 Deg Mud Motor,1x30 - On 9/17/10 MIRU Set Surface Equipment With Marcus Liddell Trucking (6 Mile Move From 9-29-8-16) - Drill 7 7/8" Hole From 352' To 941' WOB 20,000 lbs,TRPM 168,GPM 344,AVG ROP 130.9 fph. - Drill Plug,Cement & Shoe F/309' To 352', - Kelly Gain Circ,Kelly Packing Leaking,Change Out Packing. - Monel DC,1x3' Gap Sub,1x2.5' Antenna Sub,1x5' Pong DC,20 6" DCS,Scribe Tools. Tag Cement @ 309'. P/U - Accepted Rig on 9/17/10 @ 16:30,R/U B&C Quick Test,Test Upper Kelly Valve,Saftey Valve,Pipe & Blind - Rams , Ckoke Line & Manifold To 2000 psi for 10 mins,Test 8 5/8" Surface To 1500 psi for 30 mins. - Everything Tested OK. - Extended Brace On Kelly Spinners. - P/U Swivel, Kelly Spinners & Make Up Kelly..

Daily Cost: \$0**Cumulative Cost:** \$99,353**FEDERAL 14-25-8-15****Drill 7 7/8" hole with fresh water****Date:** 9/19/2010

NDSI #2 at 4269. 2 Days Since Spud - Drill 7 7/8" Hole From 941' To 2494', WOB 23,000 lbs,TRPM 169, GPM 344, AVG ROP 238.9 fph - Rig Service, Check Crown-A-Matic, Function Test Bop's. - Drill 7 7/8" Hole From 2494' To 4269' WOB 23,000 lbs,TRPM 168, GPM 344, AVG ROP 104.4 fph - No H2s Reported Last 24 Hrs - Held Bop Drill. Hands @ Stations 1 Min. - 123 Days Without Recordable Incident

Daily Cost: \$0**Cumulative Cost:** \$134,488**FEDERAL 14-25-8-15****Drill 7 7/8" hole with fresh water****Date:** 9/20/2010

NDSI #2 at 6328. 3 Days Since Spud - Rig Service Function Test BOP'S,Check Crown-A-Matic - Drill 7 7/8" Hole From 4966' To 6328', WOB 23,000 lbs,TRPM 168,GPM 344, AVG ROP 82.5 fph - 10' Slide @ 5600' To 5610' - 10' Slide @ 5632' To 5642' - No H2s Reported Last 24 Hrs. - 124 Days Without Recordable Incident - Drill 7 7/8" Hole From 4269' To 4966'. WOB 23,000 lbs,TRPM 168, 344 GPM,AVG ROP 99.5 FPH

Daily Cost: \$0**Cumulative Cost:** \$159,503**RECEIVED****NOV 08 2010****FEDERAL 14-25-8-15****Wait on Completion**

DIV. OF OIL, GAS & MINING

Date: 9/21/2010

NDSI #2 at 6595. 4 Days Since Spud - Circ Hole For Laydown & Logs.W/On Laydown Crew.
(Adjust Brakes 0 - Drill 7 7/8" Hole From 6328' To 6595'. WOB 22,000 lbs, TRPM 168,GPM
344,AVG ROP133.5 fph - R/U Phoenix Surveys Log With DISGL/SP/GR Suite From Loggers TD
6576' To Suurface Casing & DSN/SDL/GR - CAL Suite From 6576' To 3000' - R/U B&C Quick
Test.Test 5 1/2" Pipe Rams To 2000 psi for 10 Mins. Tested OK - R/U Marcus Liddells Casing
Run 156 jts 5.5" J55 15.5# LT&C Casing. Shoe Set @ 6586' Top Float Collar - @ 6542' (2 jts
will be transferred to 10-25-8-15.) - R/U BJ Services Cement Head Circ Casing W/ Rig Pumpo
- R/U BJ Test Lines T0 3800 psi. Then Pumped 275 sks Lead Cement Mix @ 11.0 ppg W/ 3.53
Yield - (PL-II +3% KCL +5# CSE+0.5#CF+5#KOL+.5SMS+FP+SF) Then 450 sks @ 14.4 ppg
w/ 1.24 yield - (50:50:2+3%KCL+0.5#EC-1+.25#CF+.05#SF+.3SMS+FP-6L) Displaced with
155.8 Returned 20 bbls To Pit - Bumped Plug To 1800 psi. - Nipple Down Bop's,Set Slips With
90,000# Tension - Clean Mud Tanks - Released Rig @ 6:00 AM 9/21/10 DB - LDDP & BHA

Finalized**Daily Cost:** \$0**Cumulative Cost:** \$316,710

Pertinent Files: Go to File List

RECEIVED
NOV 08 2010
DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

5. Lease Serial No. UTU-67168	
6. If Indian, Allottee or Tribe Name NA	
7. If Unit or CA Agreement, Name and No. NA Greater Monument Butte 12/11	
8. Lease Name and Well No. Federal 14-25-8-15	
9. API Well No. 43 013 50050	
10. Field and Pool, or Exploratory Monument Butte	
11. Sec., T. R. M. or Blk. and Survey or Area Sec. 25, T8S R15E	
12. County or Parish Duchesne	
13. State UT	
14. Distance in miles and direction from nearest town or post office* Approximately 11.8 miles southwest of Myton, UT	
15. Distance from proposed* location to nearest property or lease line, ft. Approx. 546' f/lse, NA' f/unit (Also to nearest drig. unit line, if any)	
16. No. of acres in lease 2500.00	
17. Spacing Unit dedicated to this well 40 Acres	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1264'	
19. Proposed Depth 6,420'	
20. BLM/BIA Bond No. on file WYB000493	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5748' GL	
22. Approximate date work will start* 4th Qtr. 2009	
23. Estimated duration (7) days from SPUD to rig release	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, must be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the BLM.

25. Signature <i>Mandie Crozier</i>	Name (Printed/Typed) Mandie Crozier	Date 6/15/09
Title Regulatory Specialist		
Approved by (Signature) <i>James H. Sparger</i>	Name (Printed/Typed) James H. Sparger	Date FEB 15 2010
Title ACTING Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

CONDITIONS OF APPROVAL ATTACHED

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

UDOGM

RECEIVED

JUN 30 2009

FEB 17 2010

NOTICE OF APPROVAL

BLM VERNAL, UTAH

DIV. OF OIL, GAS & MINING

NOS 12/04/08

095X52258A




UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4401



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company:	Newfield Production Company	Location:	SESW, Sec. 25, T8S, R15E
Well No:	Federal 14-25-8-15	Lease No:	UTU-67168
API No:	43-013-50050	Agreement:	Greater Monument Butte Unit

OFFICE NUMBER: (435) 781-4400

OFFICE FAX NUMBER: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify Environmental Scientist)	-	Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	-	Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings to: ut_vn_opreport@blm.gov .
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

- All new and replacement internal combustion gas field engines of less than or equal to 300 design-rated horsepower must not emit more than 2 gms of NO_x per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower.
- All and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 gms of NO_x per horsepower-hour.
- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

CONDITIONS OF APPROVAL:

Federal 1-25-8-15, Federal 2-25-8-15, Federal 4-25-8-15, Federal 5-25-8-15, Federal 6-25-8-15, Federal 7-25-8-15, Federal 8-25-8-15, Federal 9-25-8-15, Federal 10-25-8-15, Federal 11-25-8-15, Federal 12-25-8-15, Federal 13-25-8-15, Federal 14-25-8-15, Federal 15-25-8-15, and Federal 16-25-8-15:

- Construction and drilling is not allowed from May 1st – June 15th to minimize impacts during Mountain plover nesting.
- If it is anticipated that construction or drilling will occur during the given timing restriction, a BLM or qualified biologist shall be notified so surveys can be conducted. Depending upon the results of the surveys, permission to proceed may or may not be recommended or granted by the BLM biologist.

Federal 1-25-8-15, Federal 2-25-8-15, Federal 3-25-8-15, Federal 4-25-8-15, Federal 5-25-8-15, Federal 6-25-8-15, Federal 7-25-8-15, Federal 8-25-8-15, Federal 9-25-8-15, Federal 10-25-8-15, Federal 11-25-8-15, Federal 12-25-8-15, Federal 13-25-8-15, Federal 14-25-8-15, Federal 15-25-8-15, and Federal 16-25-8-15:

Reclamation

- Reclamation will be completed in accordance with the Newfield Exploration Company Castle Peak and Eight Mile Flat Reclamation Plan on file with the Vernal Field Office of the BLM.

Seed Mix (Interim and Final Reclamation)

Common name	Latin name	lbs/acre	Recommended seed planting depth
Squirreltail grass	<i>Elymus elymoides</i>	2.0	1/4 - 1/2"
Bluebunch wheatgrass	<i>Pseudoroegneria spicata</i>	1.0	1/2"
Shadscale saltbush	<i>Atriplex confertifolia</i>	2.0	1/2"
Four-wing saltbush	<i>Atriplex canescens</i>	3.0	1/2"
Gardner's saltbush	<i>Atriplex gardneri</i>	1.0	1/2"
Scarlet globemallow	<i>Sphaeralcea coccinea</i>	1.0	1/8 - 1/4"

- All pounds are pure live seed.
- All seed and mulch will be certified weed free.
- Rates are set for drill seeding; double rate if broadcasting.

Monitoring and Reporting

- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) that designates the proposed site-specific monitoring and reference sites chosen for the location. A description of the proposed sites shall be included, as well as a map showing the locations of the proposed sites.
- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) 3 growing seasons after reclamation efforts have occurred evaluating the status of the reclaimed areas in order to determine whether the BLM standards set forth in the Green River District Reclamation Guidelines have been met (30% or greater basal cover).

**DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

SITE SPECIFIC DOWNHOLE COAs:

- Newfield Production Co. shall adhere to all referenced requirements in the SOP (version: June 24, 2008)) along with all Oil and Gas rules and requirements listed in the Code of Federal Regulations and all Federal Onshore Oil and Gas Orders.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.

- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Wellogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.

- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.
- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.

- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.