

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT **APPLICATION FOR PERMIT TO DRILL****1. WELL NAME and NUMBER**
Ute Tribal 3-21-4-1**2. TYPE OF WORK**DRILL NEW WELL REENTER P&A WELL DEEPEN WELL **3. FIELD OR WILDCAT**
MONUMENT BUTTE**4. TYPE OF WELL**

Oil Well Coalbed Methane Well: NO

5. UNIT or COMMUNITIZATION AGREEMENT NAME**6. NAME OF OPERATOR**

NEWFIELD PRODUCTION COMPANY

7. OPERATOR PHONE
435 646-4825**8. ADDRESS OF OPERATOR**

Rt 3 Box 3630 , Myton, UT, 84052

9. OPERATOR E-MAIL
mcrozier@newfield.com**10. MINERAL LEASE NUMBER
(FEDERAL, INDIAN, OR STATE)**
14-20-H62-5609**11. MINERAL OWNERSHIP**
FEDERAL INDIAN STATE FEE **12. SURFACE OWNERSHIP**
FEDERAL INDIAN STATE FEE **13. NAME OF SURFACE OWNER (if box 12 = 'fee')**
Gerald N. Andersen Family Trust**14. SURFACE OWNER PHONE (if box 12 = 'fee')****15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')**
657 W Lakeview Rd, ,**16. SURFACE OWNER E-MAIL (if box 12 = 'fee')****17. INDIAN ALLOTTEE OR TRIBE NAME
(if box 12 = 'INDIAN')****18. INTEND TO COMMINGLE PRODUCTION FROM
MULTIPLE FORMATIONS**
YES (Submit Commingling Application) NO **19. SLANT**
VERTICAL DIRECTIONAL HORIZONTAL

20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN
LOCATION AT SURFACE	235 FNL 1933 FWL	NENW	21	4.0 S	1.0 W	U
Top of Uppermost Producing Zone	235 FNL 1933 FWL	NENW	21	4.0 S	1.0 W	U
At Total Depth	235 FNL 1933 FWL	NENW	21	4.0 S	1.0 W	U

21. COUNTY
DUCHESNE**22. DISTANCE TO NEAREST LEASE LINE (Feet)**
235**23. NUMBER OF ACRES IN DRILLING UNIT**
40**25. DISTANCE TO NEAREST WELL IN SAME POOL
(Applied For Drilling or Completed)**
1584**26. PROPOSED DEPTH**
MD: 6945 TVD: 6945**27. ELEVATION - GROUND LEVEL**
5125**28. BOND NUMBER**
WYB000493**29. SOURCE OF DRILLING WATER /
WATER RIGHTS APPROVAL NUMBER IF APPLICABLE**
43-7478**Hole, Casing, and Cement Information**

String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement	Sacks	Yield	Weight
Surf	12.25	8.625	0 - 300	24.0	K-55 ST&C	8.3	Class G	138	1.17	15.8
Prod	7.875	5.5	0 - 6945	15.5	J-55 LT&C	8.3	Premium Lite High Strength	342	3.26	11.0
							50/50 Poz	363	1.24	14.3

ATTACHMENTS**VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES**



<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input checked="" type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)	<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER
<input type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)	<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP

NAME Mandie Crozier	TITLE Regulatory Tech	PHONE 435 646-4825
SIGNATURE	DATE 12/15/2009	EMAIL mcrozier@newfield.com
API NUMBER ASSIGNED 43013502040000		APPROVAL

T4S, R1W, U.S.B.&M.

NEWFIELD PRODUCTION COMPANY


WELL LOCATION, WELL 3-21-4-1,
 LOCATED AS SHOWN IN THE NE 1/4 NW
 1/4 OF SECTION 21, T4S, R1W,
 U.S.B.&M. DUCHESNE COUNTY, UTAH.

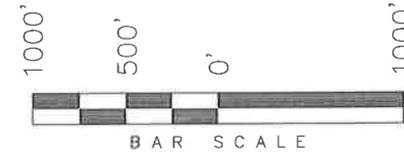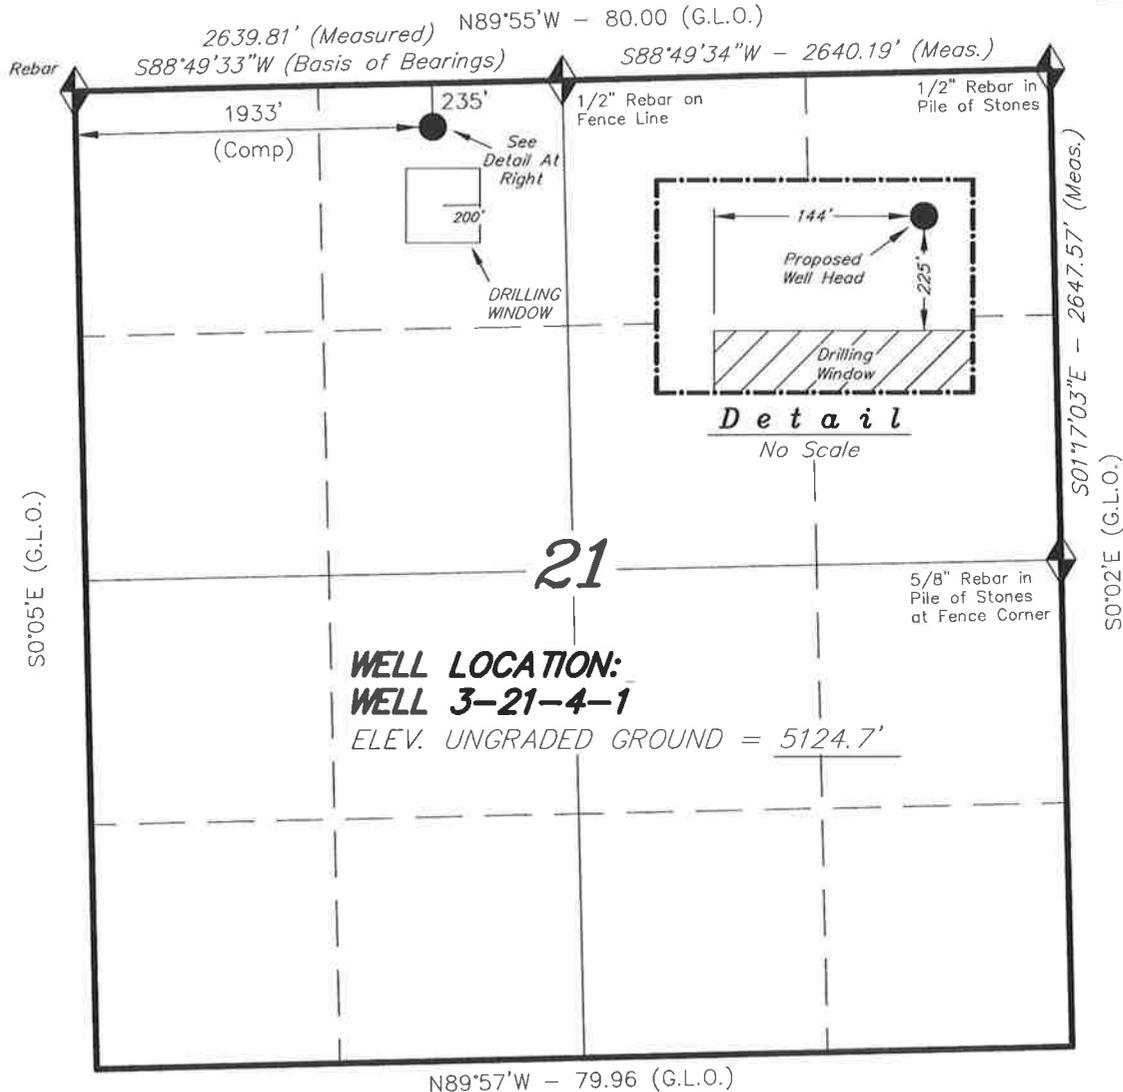

Note:
 1. The Proposed Well head bears
 S70°23'47"W 743.96' from the
 North 1/4 Corner of Section 21.

WELL LOCATION:
WELL 3-21-4-1
 ELEV. UNGRADED GROUND = 5124.7'

THIS IS TO CERTIFY THAT THE ABOVE PLAN WAS
 PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS
 MADE BY ME OR UNDER MY SUPERVISION AND THAT
 THE SAME ARE TRUE AND CORRECT TO THE BEST
 OF MY KNOWLEDGE AND BELIEF.

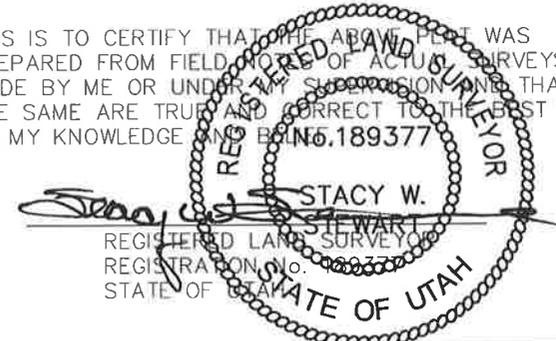

TRI STATE LAND SURVEYING & CONSULTING
 180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
 (435) 781-2501

DATE SURVEYED: 10-22-09	SURVEYED BY: C.M.
DATE DRAWN: 10-26-09	DRAWN BY: M.W.
REVISED:	SCALE: 1" = 1000'

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV; Elevations are base on
 LOCATION: an N.G.S. OPUS Correction.
 LAT. 40°04'09.56" LONG. 110°00'43.28"
 (Tristate Aluminum Cap) Elev. 5281.57'

WELL 3-21-4-1
 (Surface Location) NAD 83
 LATITUDE = 40° 07' 37.78"
 LONGITUDE = 110° 00' 14.34"

MEMORANDUM
of
EASEMENT, RIGHT-OF-WAY
and
SURFACE USE AGREEMENT

This Easement, Right-of-Way and Surface Use Agreement ("Agreement") is entered into this 23rd day of November, 2009 by and between, **Gerald N. Andersen Family Trust, Gerald N. Andersen and Rhea J. Andersen whose address is 657 W. Lakeview Road, Lindon, Utah 84042**, ("Surface Owner," whether one or more) and Newfield Production Company, a Texas corporation ("NEWFIELD"), with offices at 1001 Seventeenth Street, Suite 2000, Denver, Colorado 80202, covering certain lands, (the "Lands") situated in Duchesne County, Utah described as follows:

Township 4 South, Range 1 West

Section 21: NENE (1-21-4-1)

NWNE (2-21-4-1)

NENW (3-21-4-1)

SENE (6-21-4-1)

SWNE (7-21-4-1)

Section 22: NENW (3-22-4-1)

NWNW (4-22-4-1)

Duchesne County, Utah
Being 280 acres, more or less,

For and in consideration of the sum of ten dollars (\$10.00), and other valuable consideration, the receipt and sufficiency of which are hereby acknowledged, the undersigned hereby agree to the terms and provisions set forth as follows:

1. Compensation for Well; Release of All Claims

NEWFIELD shall pay to Surface Owner the sum as set forth in and according to the terms of that certain Letter Agreement for Easement, Right-of Way and Surface Use by and between Surface Owner and NEWFIELD, dated November 23rd, 2009 as full payment and satisfaction for any and all detriment, depreciation, injury or damage of any nature to the Lands or growing crops thereon that may occur as a result of NEWFIELD's drilling or completion operations or its continuing activities for the production or transportation of oil, gas, or other hydrocarbons or products associated with the foregoing including, but not limited to, surface use, access, pipelines, gathering lines, pipeline interconnections, and any and all other reasonable or customary uses of land related to said operations or activities.

2. Grant of Right of Way and Easement


Surface Owner hereby grants, bargains, leases, assigns, and conveys to NEWFIELD an easement and right-of-way for the purpose of construction, using and maintaining access roads, locations for surface equipment and subsurface gathering lines for each well drilled upon the Lands, pipelines, and pipeline interconnections for two years from date of this agreement and so long thereafter as NEWFIELD's oil and gas leases remain in effect.

This Agreement shall be binding upon the respective heirs, executors, administrators, successors, and assigns of the undersigned. This agreement replaces and supersedes any and all prior agreements covering the lands described herein.

These Parties hereto have executed this document effective as of the day first above written.

GERALD N. ANDERSEN FAMILY TRUST

NEWFIELD PRODUCTION COMPANY

By: 
Gerald N. Andersen, Trustee

By: _____
Daniel W. Shewmake
Vice President - Development

By: 
Rhea J. Andersen, Trustee

STATE OF UTAH)
)ss
COUNTY OF Utah)

This instrument was acknowledged before me this 23rd day of November, 2009 by **Gerald N. Andersen, as Trustee of the Gerald N. Andersen Family Trust.**

Witness my hand and official seal.

My commission expires 9/8/2013

[Signature]
Notary Public



STATE OF UTAH)
)ss
COUNTY OF Utah)

This instrument was acknowledged before me this 23rd day of November, 2009 by **Rhea J. Andersen, as Trustee of the Gerald N. Andersen Family Trust.**

Witness my hand and official seal.

My commission expires 9/8/2013

[Signature]
Notary Public



STATE OF COLORADO)
)ss
COUNTY OF Denver)

This instrument was acknowledged before me this _____, 2009 by **Daniel W. Shewmake, Vice President – Development of Newfield Production Company, a Texas corporation, on behalf of the corporation.**

Witness my hand and official seal.

My commission expires _____

Notary Public

NEWFIELD PRODUCTION COMPANY
UTE TRIBAL 3-21-4-1
NE/NW SECTION 21, T4S, R1W
DUCHESNE COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0 – 2,025'
Green River	2,025'
Wasatch	6,945'

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil) 2,025' – 6,945'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO ₃) (mg/l)
Dissolved Bicarbonate (NaHCO ₃) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO ₄) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. **Casing Design: Ute Tribal 3-21-4-1**

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	300'	24.0	J-55	STC	2,950	1,370	244,000
						17.53	14.35	33.89
Prod casing 5-1/2"	0'	6,945'	15.5	J-55	LTC	4,810	4,040	217,000
						2.18	1.83	2.02

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg
 Pore pressure at surface casing shoe = 8.33 ppg
 Pore pressure at prod casing shoe = 8.33 ppg
 Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. **Cementing Design: Ute Tribal 3-21-4-1**

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft ³ /sk)
			ft ³			
Surface casing	300'	Class G w/ 2% CaCl	138	30%	15.8	1.17
			161			
Prod casing Lead	4,945'	Prem Lite II w/ 10% gel + 3% KCl	342	30%	11.0	3.26
			1114			
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363	30%	14.3	1.24
			451			

- *Actual volume pumped will be 15% over the caliper log
- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
 - Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ±350 feet will be drilled with an air/mist system. The air rig is equipped with a 6 ½" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ±350 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated

Ten Point Well Program &
Thirteen Point Well Program
Page 4 of 4

bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the second quarter of 2010, and take approximately seven (7) days from spud to rig release.

2-M SYSTEM

Blowout Prevention Equipment Systems


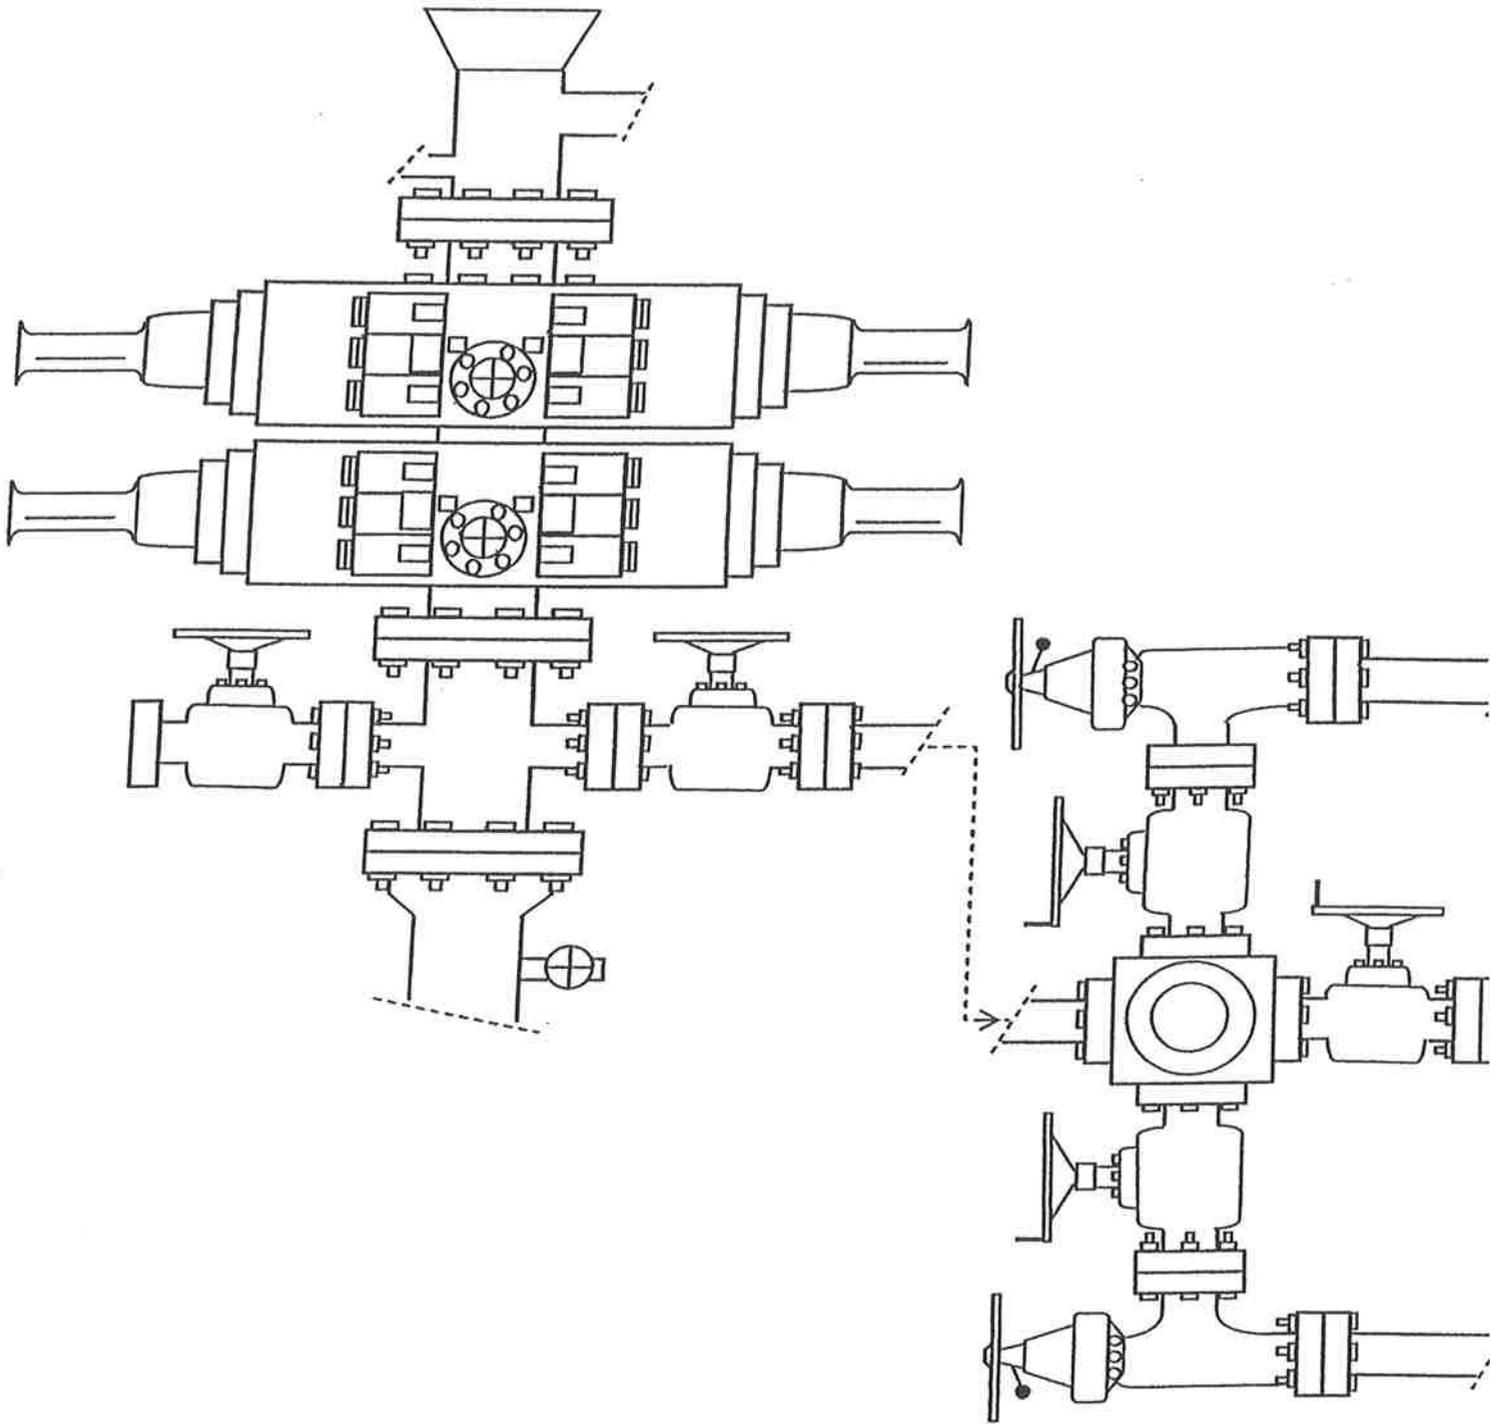


EXHIBIT C



NEWFIELD
Exploration Company

Well 3-21-4-1
SEC. 21, T4S, R1W, U.S.B.&M.

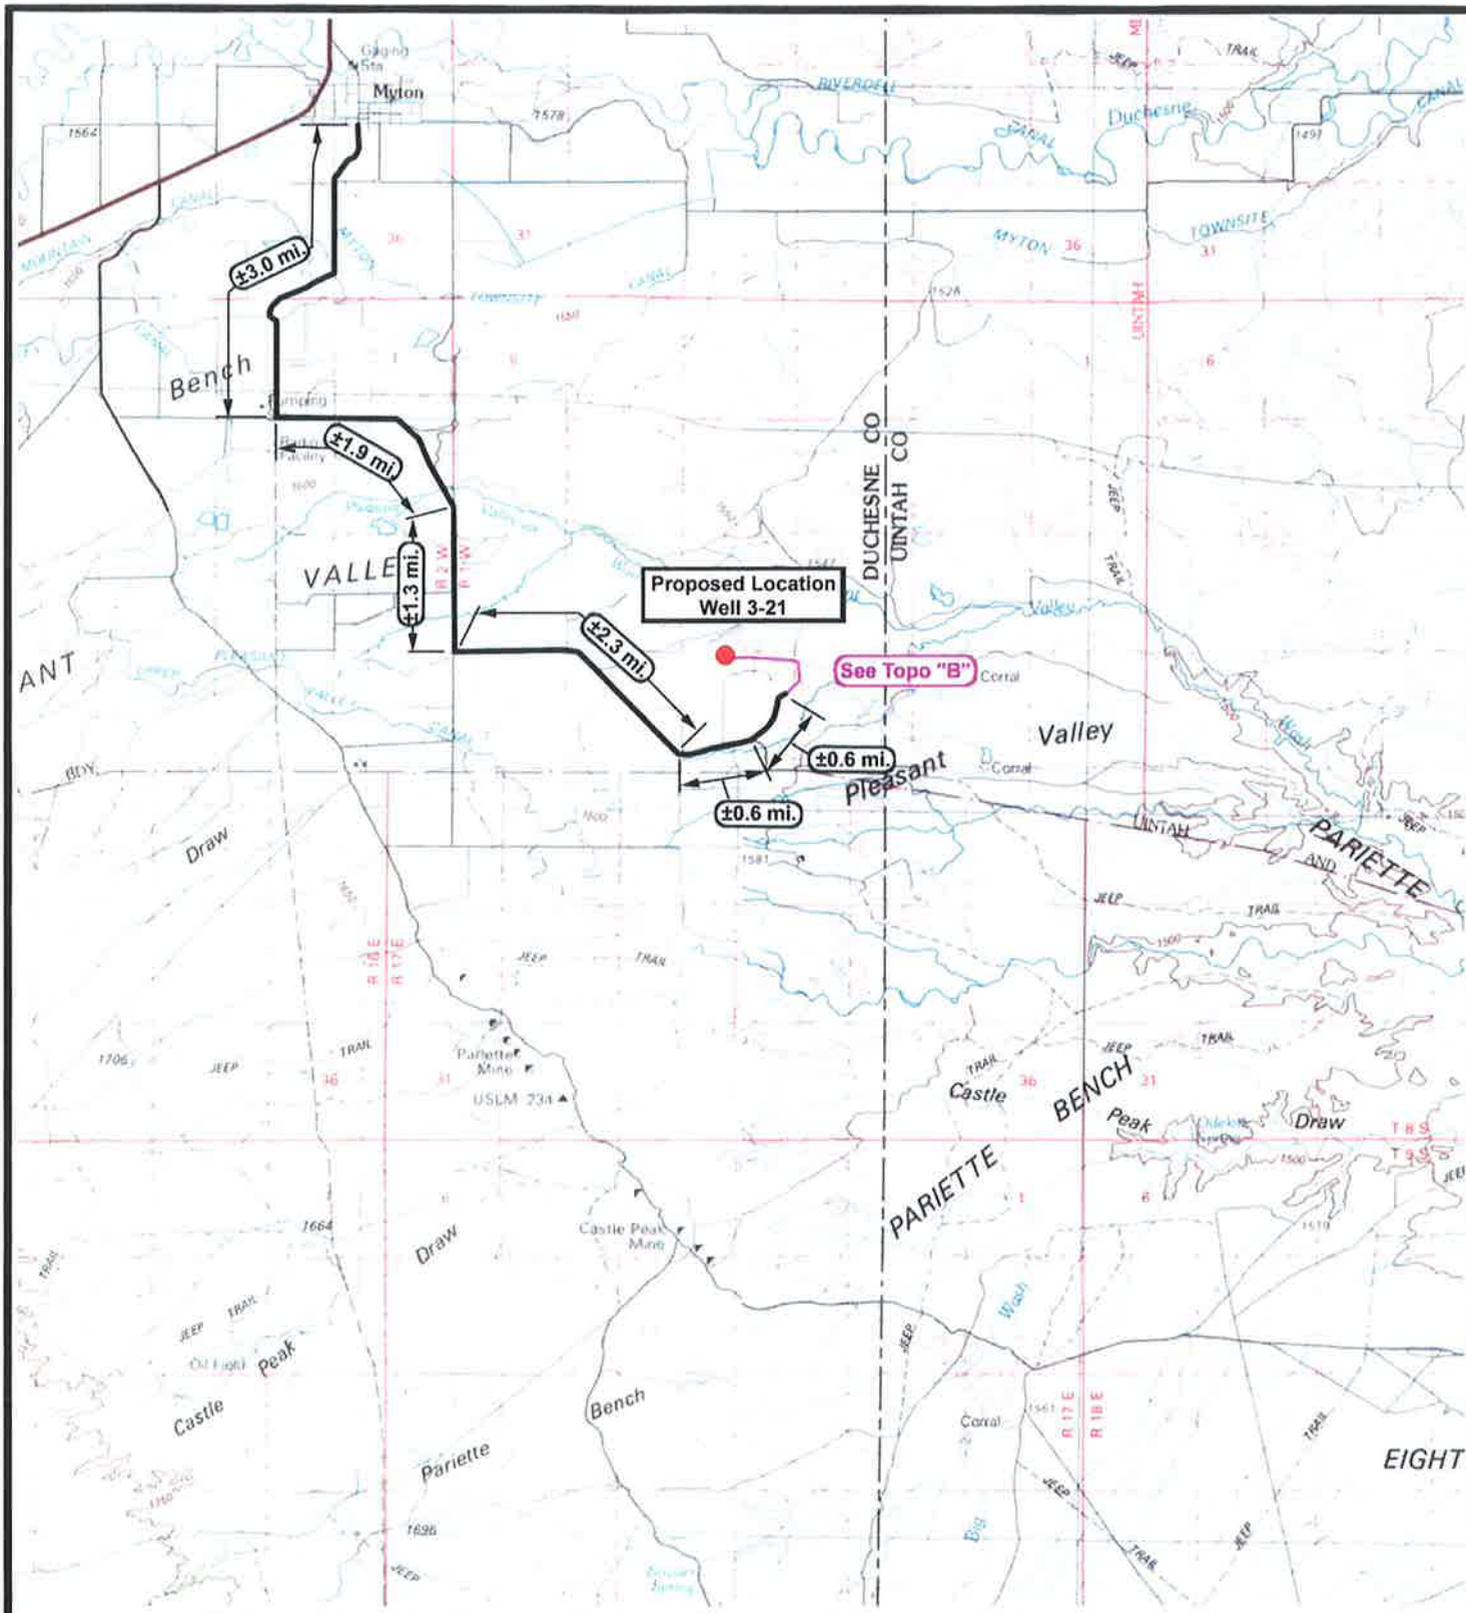

Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078


SCALE: 1:100,000
DRAWN BY: mw
DATE: 10-26-2009

Legend

- Existing Road
- Proposed Access

TOPOGRAPHIC MAP

"A"

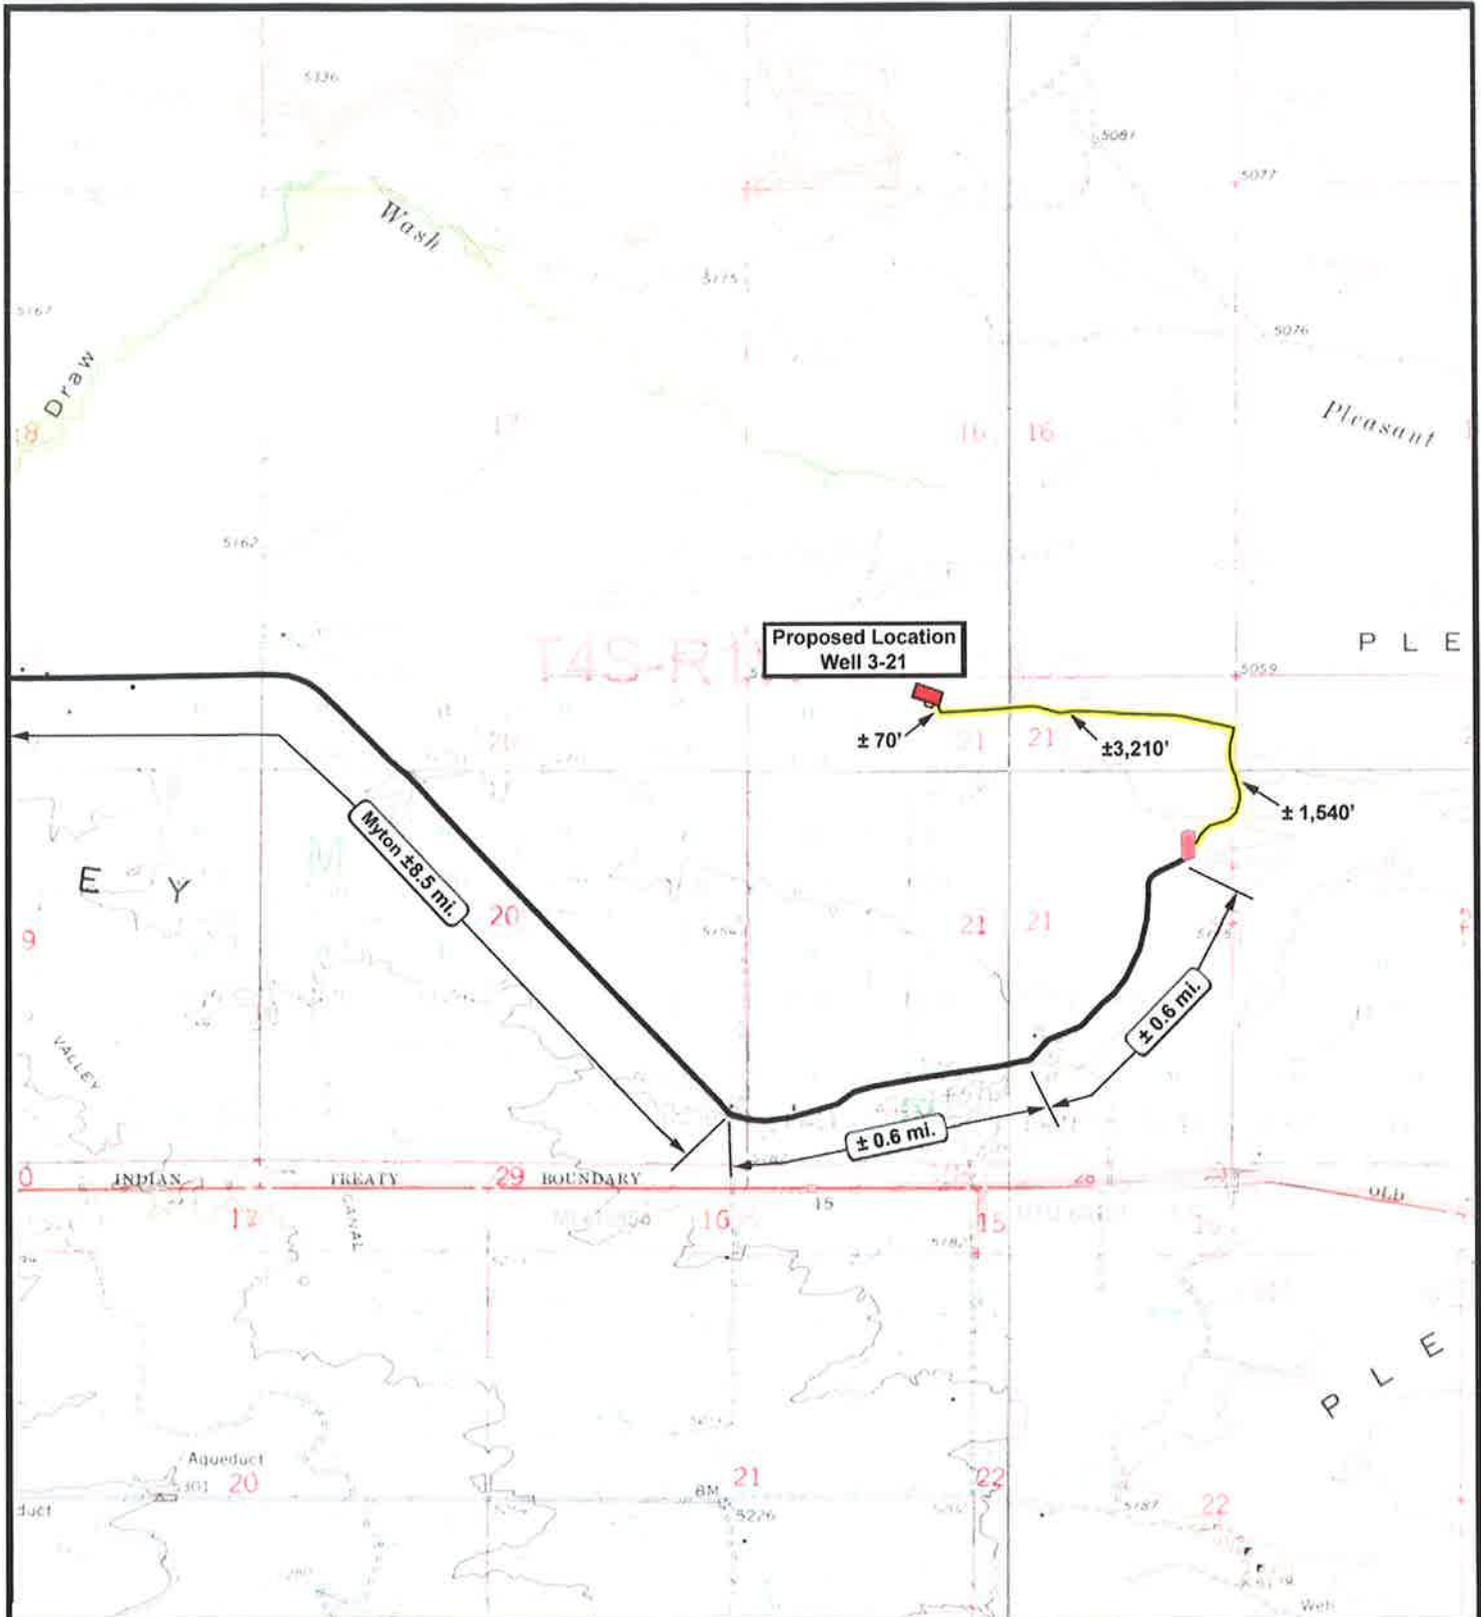

Proposed Location
Well 3-21

± 70'

21

21

± 3,210'

± 1,540'

Myton ± 8.5 mi.

20

± 0.6 mi.

± 0.6 mi.

INDIAN TREATY BOUNDARY

12

29

16

15

15

21

22

22



NEWFIELD
Exploration Company

Well 3-21-4-1
SEC. 21, T4S, R1W, U.S.B.&M.



Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'

DRAWN BY: mw


DATE: 10-26-2009

Legend

Existing Road
Proposed Access

TOPOGRAPHIC MAP

"B"

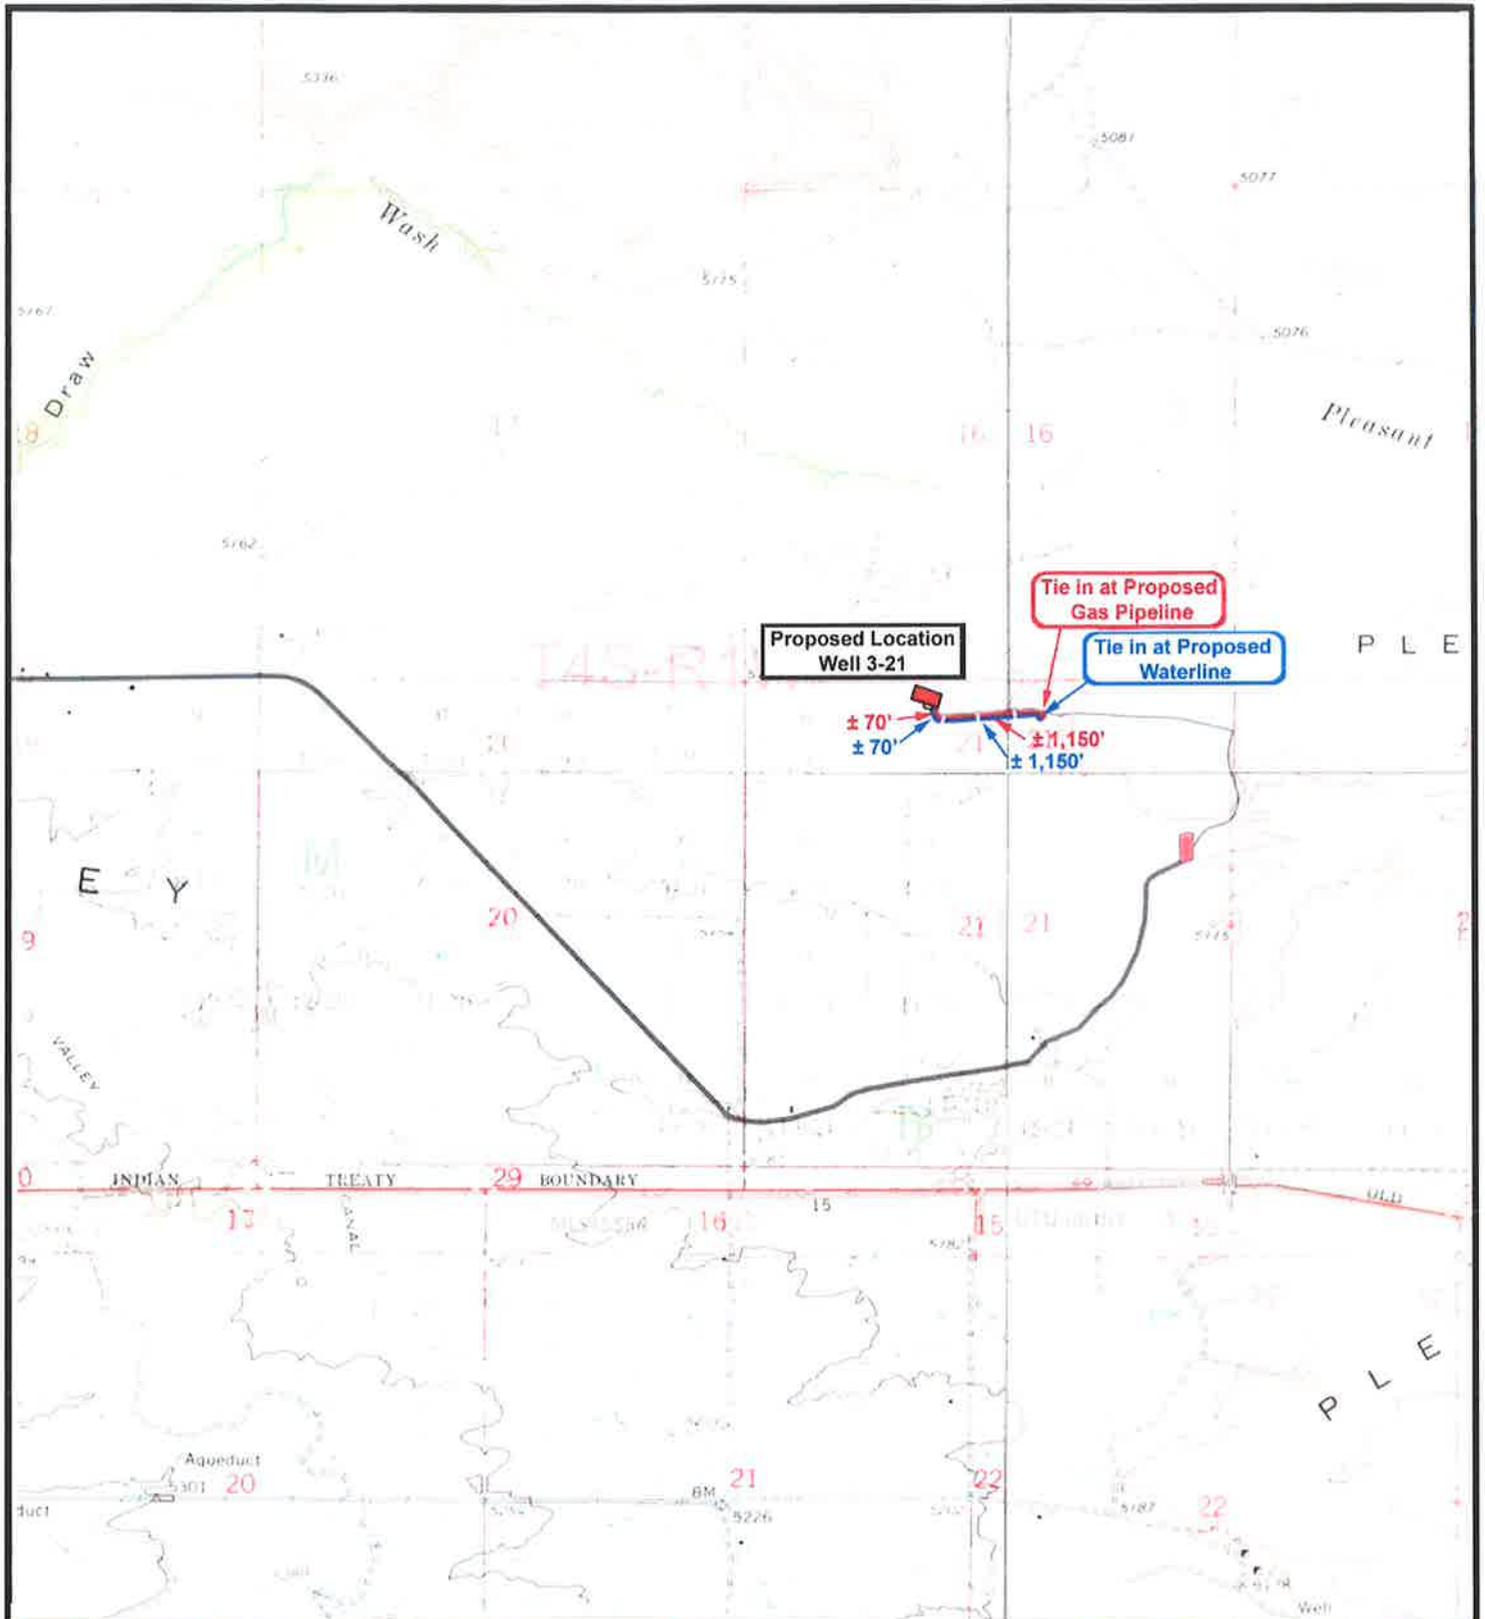

 **NEWFIELD**
Exploration Company


Well 3-21-4-1
SEC. 21, T4S, R1W, U.S.B.&M.




Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'
DRAWN BY: mw
DATE: 10-26-2009

Legend

-  Roads
-  Proposed Gas Line
-  Proposed Water Line

TOPOGRAPHIC MAP
"C"

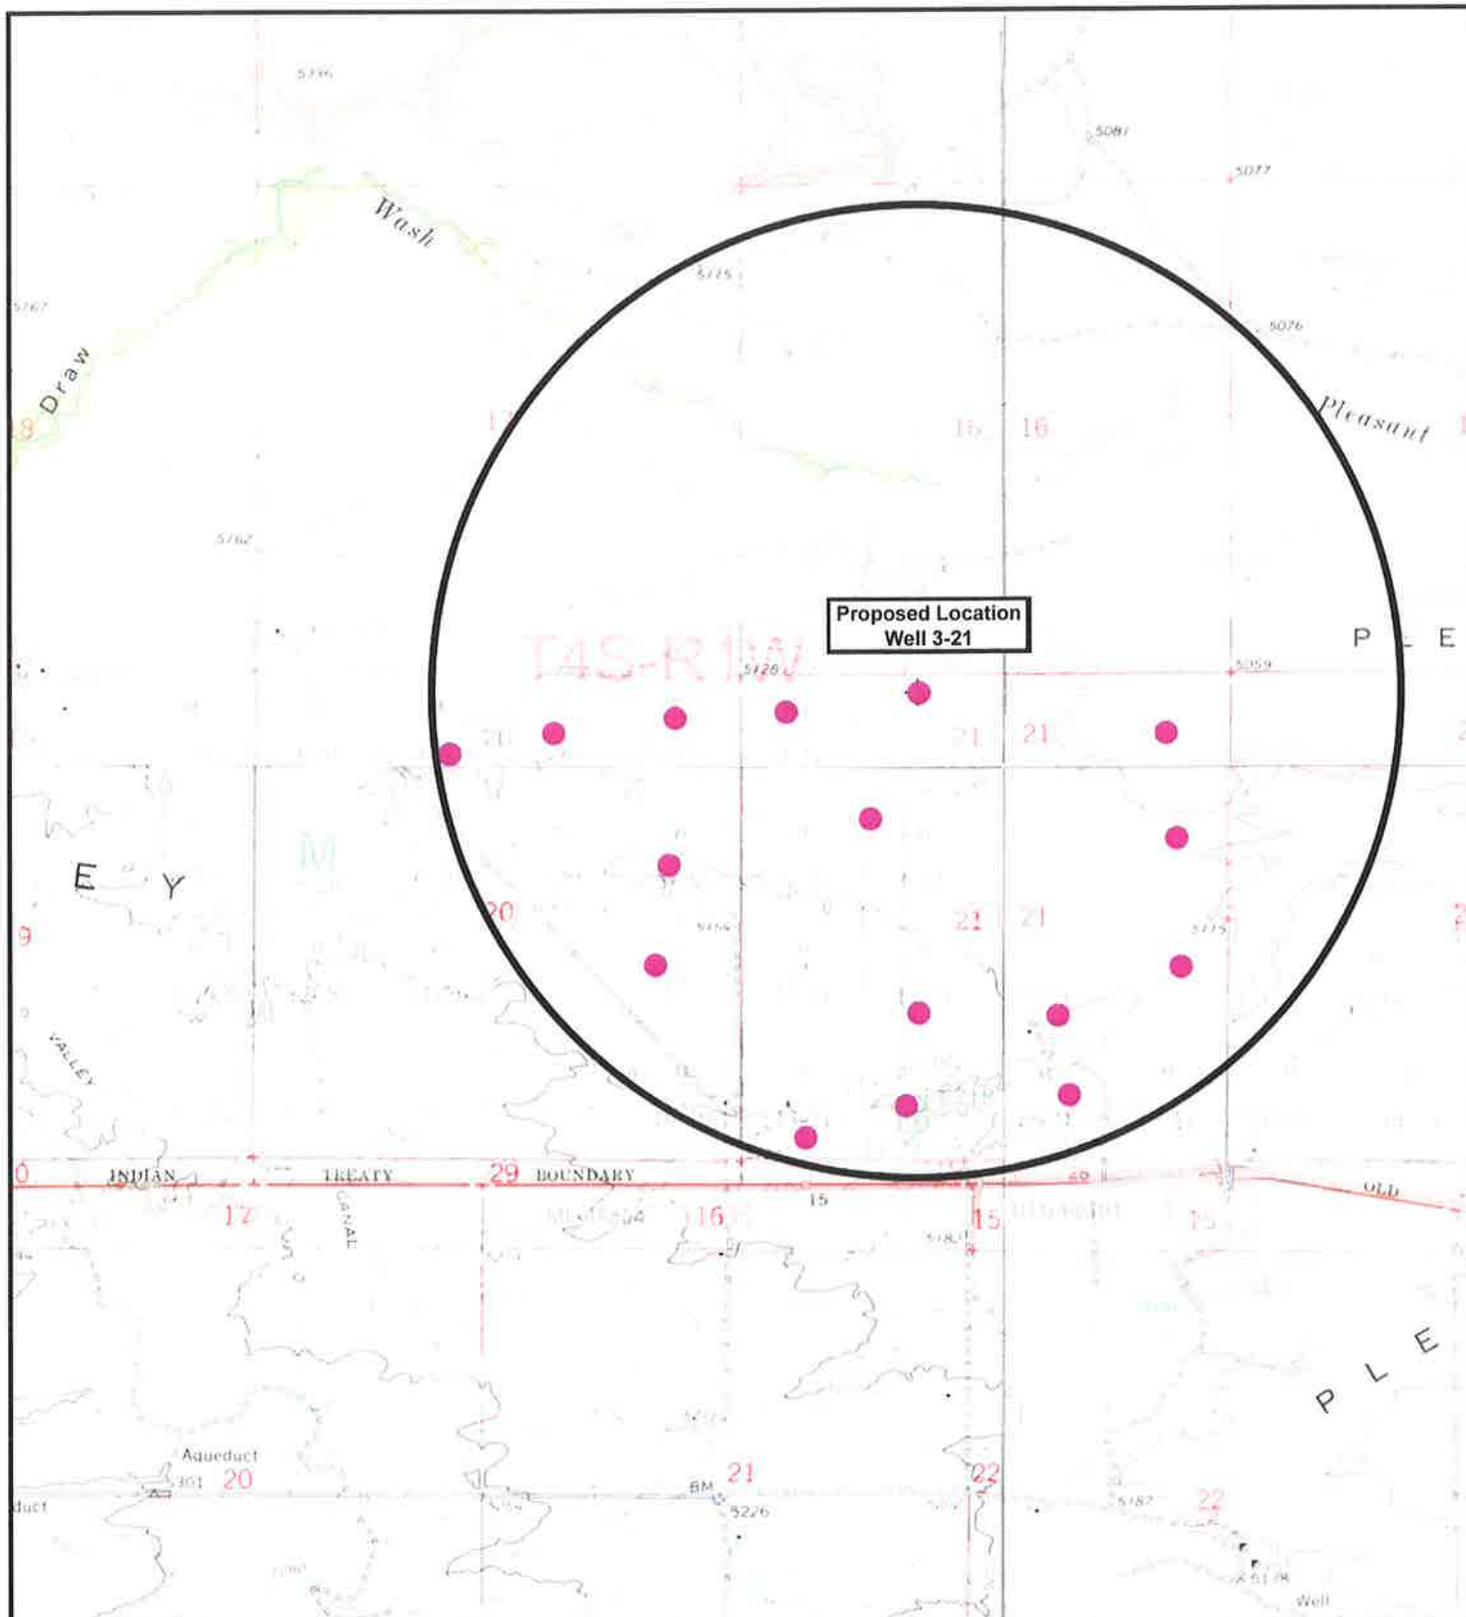

Well 3-21-4-1
SEC. 21, T4S, R1W, U.S.B.&M.



Tri-State
Land Surveying Inc.
 (435) 781-2501
 180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'
DRAWN BY: mw
DATE: 10-23-2009

Legend

- Location
- One-Mile Radius

Exhibit "B"

**NEWFIELD PRODUCTION COMPANY
UTE TRIBAL 3-21-4-1
NE/NW SECTION 21, T4S, R1W
DUCHESNE COUNTY, UTAH**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site Ute Tribal 3-21-4-1 located in the NE 1/4 NW 1/4 Section 21, T4S, R1W, Duchesne County, Utah:

Proceed in a southerly direction out of Myton, approximately 3.0 miles to it's junction with an existing road to the east; proceed in a southeasterly direction approximately 3.2 miles to it's junction with an existing road to the east; proceed in a southeasterly direction approximately 2.3 miles to it's junction with an existing road to the northeast; proceed northeasterly approximately 1.2 miles to it's junction with the beginning of the proposed access road; proceed along the proposed access road approximately 4,820' to the proposed well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

Approximately 4,820' of access road is proposed for the proposed well. See attached **Topographic Map "B"**.

The proposed access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District
Water Right : 43-7478

Neil Moon Pond
Water Right: 43-11787

Maurice Harvey Pond
Water Right: 47-1358

Newfield Collector Well
Water Right: 41-3530 (A30414DV, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), State of Utah approved surface disposal facilities, or Federally approved surface disposal facilities.

8. **ANCILLARY FACILITIES**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT**

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

- a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be

reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP** – Gerald N. Andersen Family Trust.
See attached Memorandum of Surface Use Agreement and Easement ROW.

12. **OTHER ADDITIONAL INFORMATION**

Newfield Production Company requests 4,820' of disturbed area be granted to allow for construction of the planned access road. **Refer to Topographic Map "B"**. A permanent width of 30' and a running surface of 18' is proposed for the planned access road. The construction phase of the planned access road will last approximately (5) days. The planned access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%. There will be no culverts required along this access road. There will be barrow ditches and turnouts as needed along this road. There are no fences encountered along this proposed road. There will be no new gates or cattle guards required. All construction material for this access road will be borrowed material accumulated during construction of the access road.

Newfield Production Company requests 1,220' of disturbed area be granted for construction of the proposed gas lines. It is proposed that the disturbed area will temporarily be 50' wide to allow for construction of a 6" gas gathering line, and a 3" poly fuel gas line, with a permanent width of 30' upon completion of the proposed gas lines. The construction phase of the proposed gas lines will last approximately (5) days. Both proposed lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."**

Newfield Production Company requests 1,220' of disturbed area be granted to allow for construction of the proposed water lines. It is proposed that the disturbed area will temporarily be 50' wide to allow for construction of a buried 3" steel water injection line and a buried 3" poly water return line and 30' wide upon completion of the proposed water lines. Both proposed lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."** In the event that the proposed well is converted to a water injection well, a separate injection permit will be applied for through the proper agencies.

- a) Newfield Production Company is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, Newfield is to immediately stop work that might further disturb such materials and contact the Authorized Officer.
- b) Newfield Production will control noxious weeds along rights-of-way for roads, pipelines, well sites or other applicable facilities. On State administered land it is required that a Pesticide Use Proposal shall be submitted and given approval prior to the application of herbicides or other possible hazardous chemicals.
- c) Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on State Lands after the conclusion of drilling operations or at any other time without State authorization. However, if State authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

The Archaeological and Paleontological Report Waiver is attached.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the Ute Tribal 3-21-4-1, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the Ute Tribal 3-21-4-1, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

The State office as well as the Ute Tribe Energy and Mineral Department shall be notified upon site completion prior to moving on the drilling rig.

13. LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:

Representative

Name: Tim Eaton
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification

Please be advised that Newfield Production Company is considered to be the operator of well #3-21-4-1, NE/NW Section 21, T4S, R1W, Duchesne County, Utah and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #WYB000493.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

12/15/09
Date


Mandie Crozier
Regulatory Specialist
Newfield Production Company

NEWFIELD PRODUCTION COMPANY


WELL 3-21-4-1

Section 21, T4S, R1W, U.S.B.&M.

TOPSOIL STOCKPILE

Approx. Dims. = 100'x35'x10'
 Approx. Area = 3,370 Sq. Ft.
 ±670 Cu. Yds.

PROPOSED ACCESS ROAD (Max. 6% Grade)

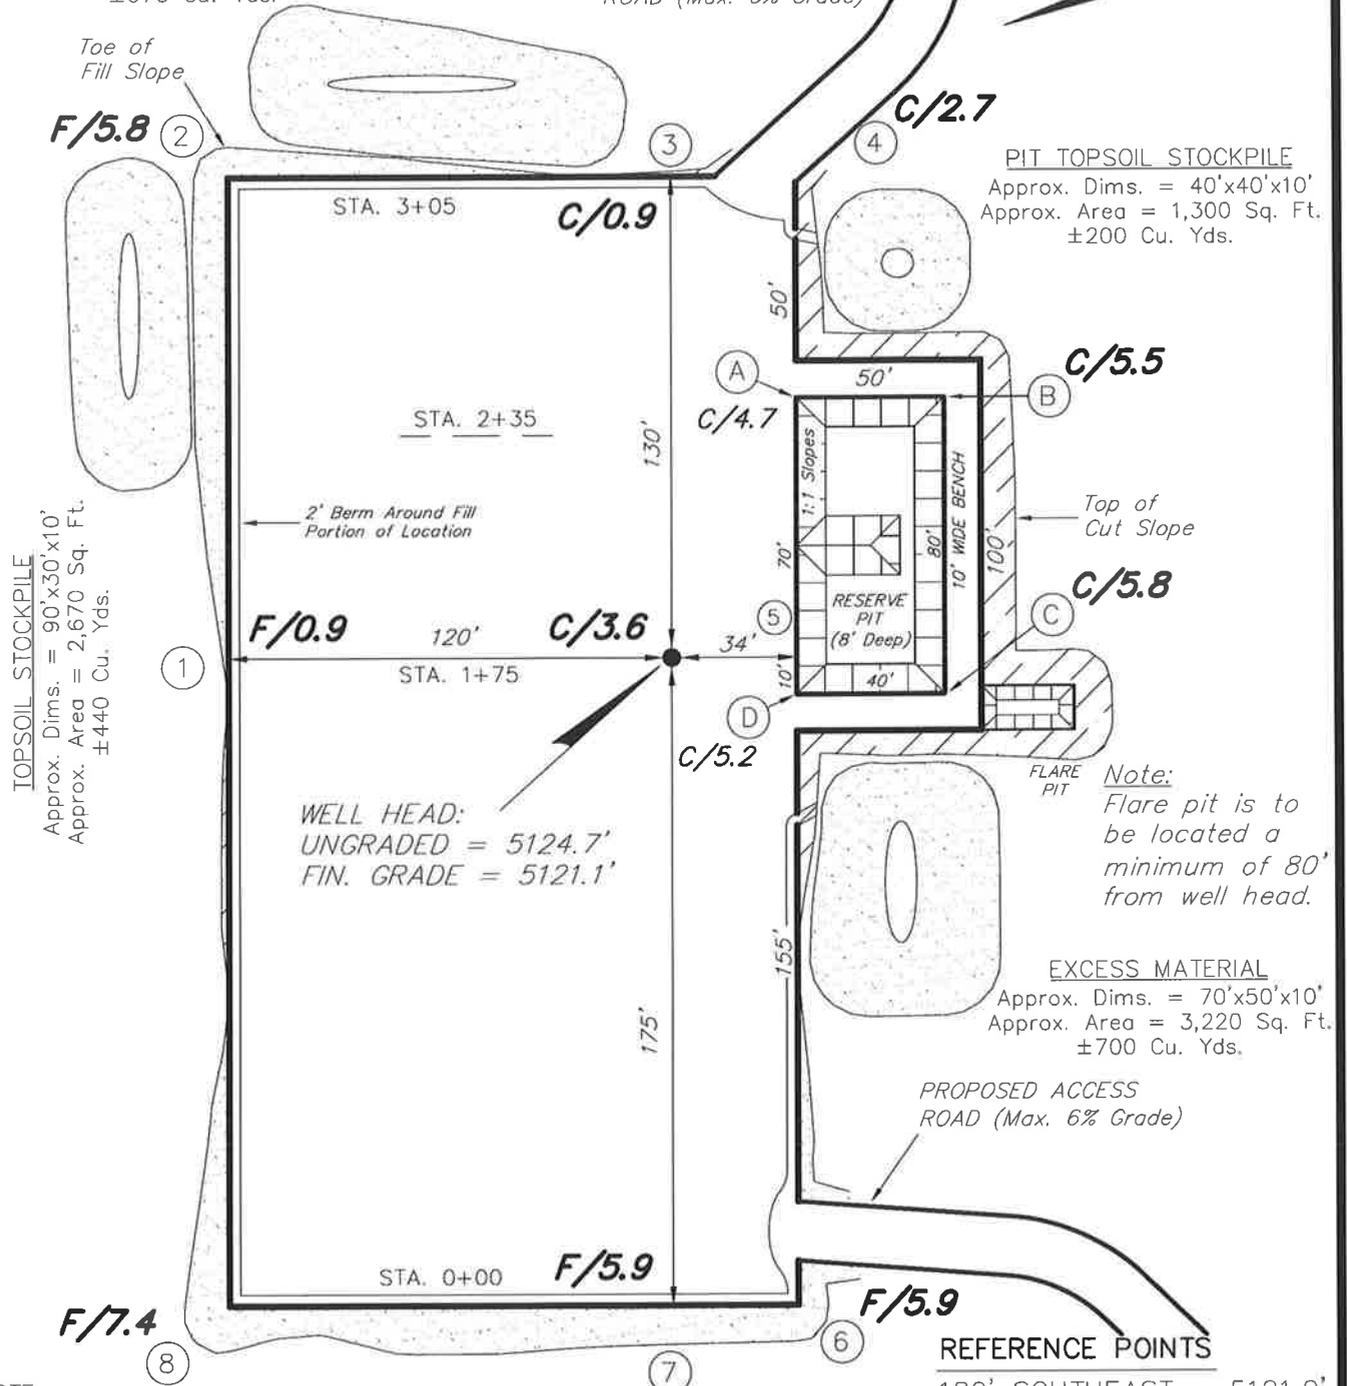

TOPSOIL STOCKPILE

Approx. Dims. = 90'x30'x10'
 Approx. Area = 2,670 Sq. Ft.
 ±440 Cu. Yds.

PIT TOPSOIL STOCKPILE

Approx. Dims. = 40'x40'x10'
 Approx. Area = 1,300 Sq. Ft.
 ±200 Cu. Yds.

WELL HEAD:
 UNGRADED = 5124.7'
 FIN. GRADE = 5121.1'

Note:
 Flare pit is to be located a minimum of 80' from well head.

EXCESS MATERIAL

Approx. Dims. = 70'x50'x10'
 Approx. Area = 3,220 Sq. Ft.
 ±700 Cu. Yds.

REFERENCE POINTS

- 180' SOUTHEAST - 5121.0'
- 230' SOUTHEAST - 5117.5'
- 170' NORTHEAST - 5116.4'
- 220' NORTHEAST - 5113.2'

NOTE:

The topsoil, excess material & temporary cuttings areas are calculated as being mounds containing 2,010 cubic yards of dirt (a 10% fluff factor is included). The mound areas are calculated with push slopes of 1.5:1 & fall slopes of 1.5:1.

SURVEYED BY: C.M.	DATE SURVEYED: 10-22-09
DRAWN BY: M.W.	DATE DRAWN: 10-26-09
SCALE: 1" = 50'	REVISED:





(435) 781-2501

Tri State
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD PRODUCTION COMPANY

CROSS SECTIONS

WELL 3-21-4-1

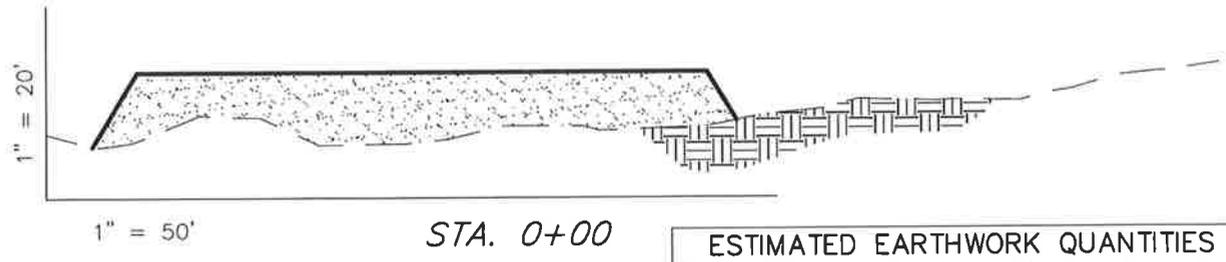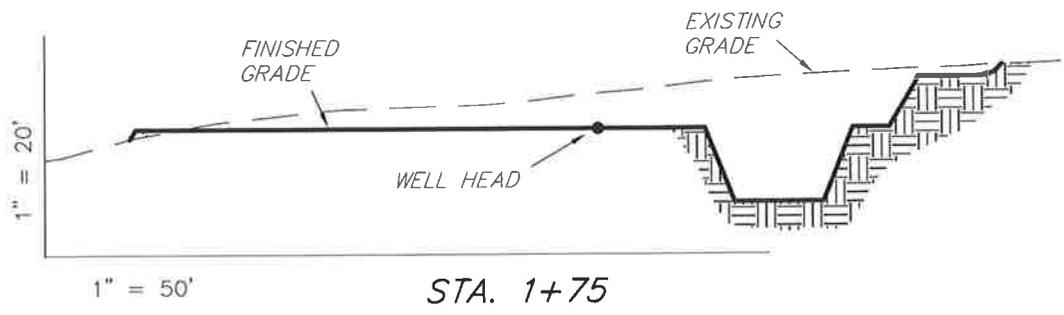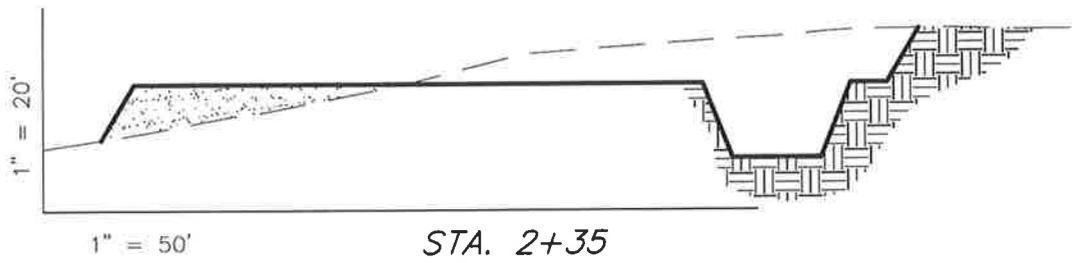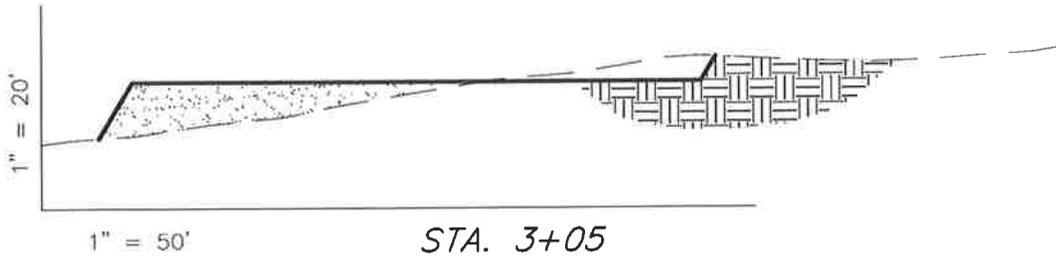

ESTIMATED EARTHWORK QUANTITIES
(No Shrink or swell adjustments have been used)
(Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	3,090	3,090	Topsoil is not included in Pad Cut	0
PIT	640	0		640
TOTALS	3,730	3,090	1,100	640

NOTE:
UNLESS OTHERWISE
NOTED ALL CUT/FILL
SLOPES ARE AT 1.5:1


SURVEYED BY: C.M.	DATE SURVEYED: 10-22-09
DRAWN BY: M.W.	DATE DRAWN: 10-26-09
SCALE: 1" = 50'	REVISED:

Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078


NEWFIELD PRODUCTION COMPANY

TYPICAL RIG LAYOUT

WELL 3-21-4-1



PROPOSED ACCESS ROAD (Max. 6% Grade)

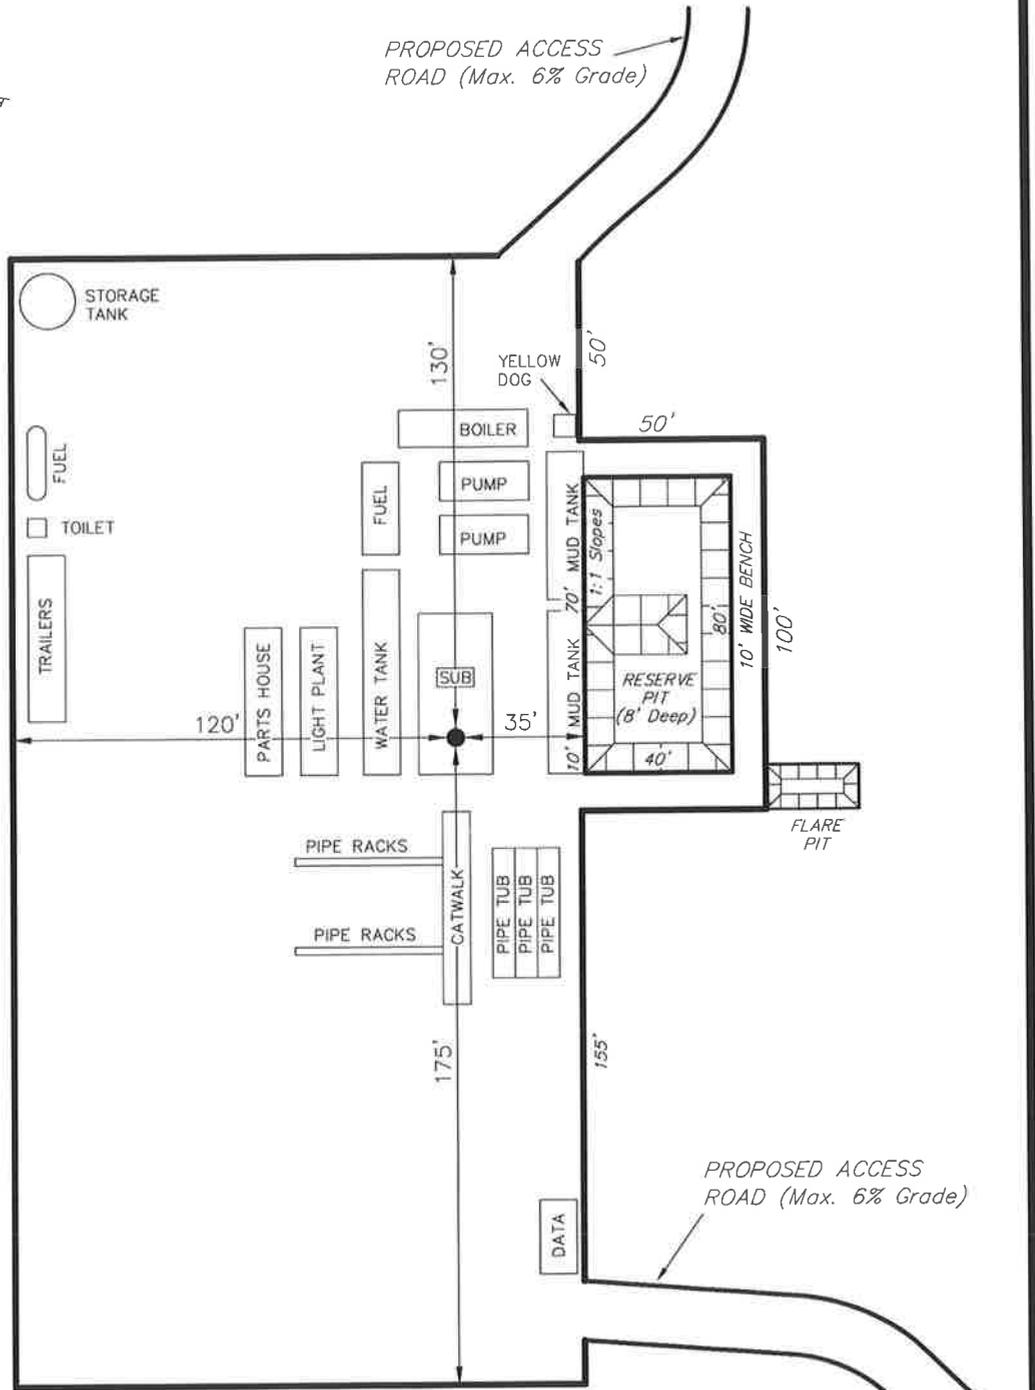

SURVEYED BY: C.M.	DATE SURVEYED: 10-22-09
DRAWN BY: M.W.	DATE DRAWN: 10-26-09
SCALE: 1" = 50'	REVISED:

Tri State
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078
 (435) 781-2501


Newfield Production Company Proposed Site Facility Diagram

Ute Tribal 3-21-4-1

NE/NW Sec. 21, T4S, R1W

Duchesne County, Utah

EDA# 14-20-H62-5609

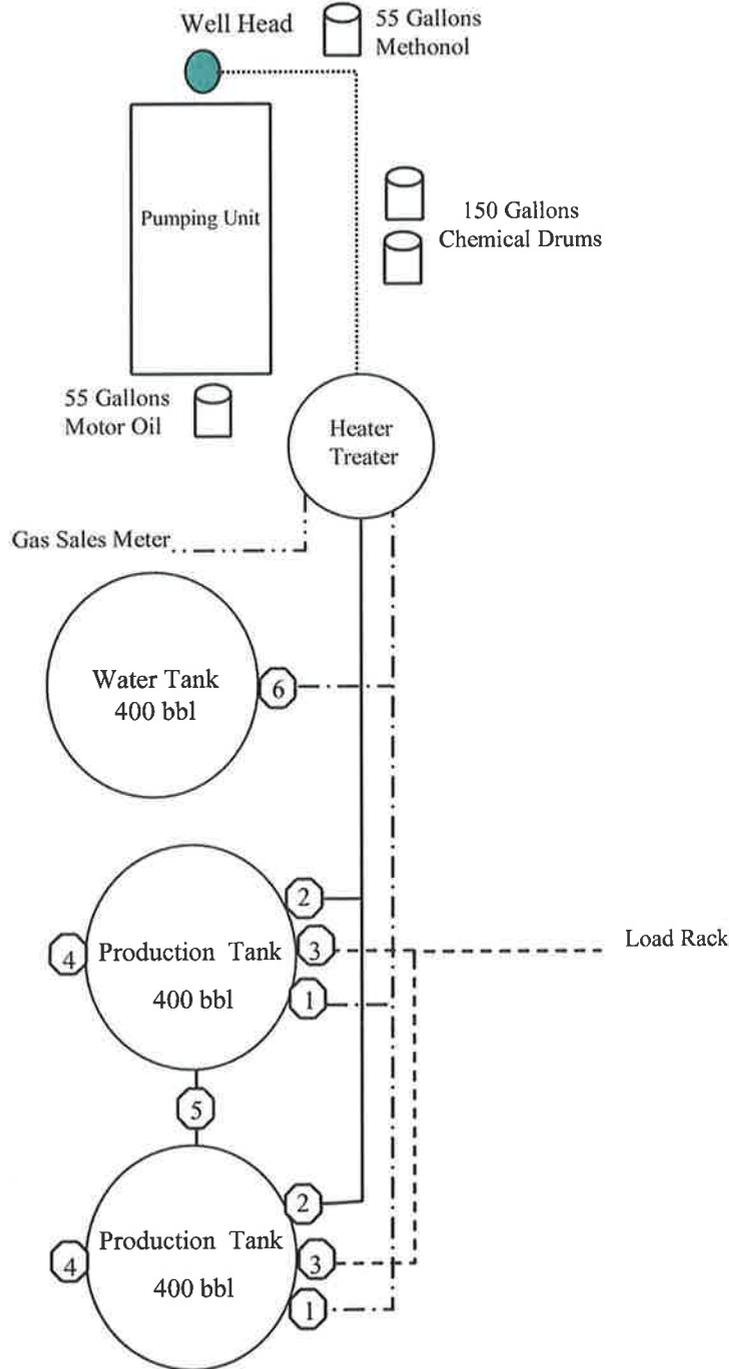

Legend

Emulsion Line
Load Rack	-----
Water Line	- . - . - . - . - .
Gas Sales
Oil Line	—————

Production Phase:

- 1) Valves 1, 3, and 4 sealed closed
- 2) Valves 2, 5, and 6 sealed open

Sales Phase:

- 1) Valves 1, 2, 4, 5, and 6 sealed closed
- 2) Valve 3 open

Draining Phase:

- 1) Valves 1 and 6 open

Diked Section



EXHIBIT D

Township 4 South, Range 1 West

Section 21: NENE (1-21-4-1)
 NWNE (2-21-4-1)
 NENW (3-21-4-1)
 SENE (6-21-4-1)
 SWNE (7-21-4-1)


Section 22: NENW (3-22-4-1)
 NWNW (4-22-4-1)

Duchesne County, Utah


ARCHAEOLOGICAL & PALEOTOLOGICAL REPORT WAIVER

For the above referenced location; Gerald N. Andersen Family Trust, Gerald N. Andersen. (Having a Surface Owner Agreement with Newfield Production Company)

Gerald N. Andersen, representing this entity does agree to waive the request from the State of Utah and Bureau of Land Management for an Archaeological/Cultural and Paleotological Resource Survey for any wells covered by the Surface Use Agreement dated 11/23/09 between the above said private land owner and Newfield Production. This waiver hereby releases Newfield Production Company from this request.

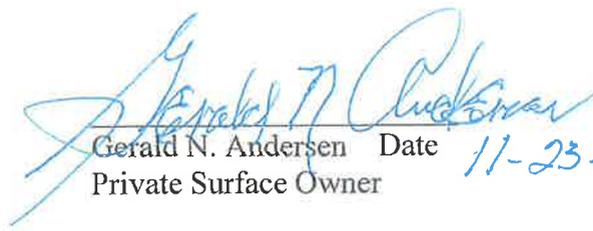

Gerald N. Andersen Date 11-23-09
Private Surface Owner



 11-24-09

Brad Mecham Date
Newfield Production Company

API Number: 4301350204
Well Name: Ute Tribal 3-21-4-1
Township 04.0 S Range 01.0 W Section 21
Meridian: UBM
 Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared:
 Map Produced by Diana Mason

Units	Wells Query
STATUS	Status
ACTIVE	APD - Approved Permit
EXPLORATORY	DRL - Spudded (Drilling Commenced)
GAS STORAGE	GIW - Gas Injection
NF PP OIL	GS - Gas Storage
NF SECONDARY	LA - Location Abandoned
PI OIL	LOC - New Location
PP GAS	OPS - Operation Suspended
PP GEOTHERMAL	PA - Plugged Abandoned
PP OIL	PGW - Producing Gas Well
SECONDARY	POW - Producing Oil Well
TERMINATED	RET - Returned APD
Fields	SGW - Shut-in Gas Well
Unknown	SOW - Shut-in Oil Well
ABANDONED	TA - Temp. Abandoned
ACTIVE	TW - Test Well
COMBINED	WDW - Water Disposal
INACTIVE	WWI - Water Injection Well
STORAGE	WSW - Water Supply Well
TERMINATED	
Sections	
Township	

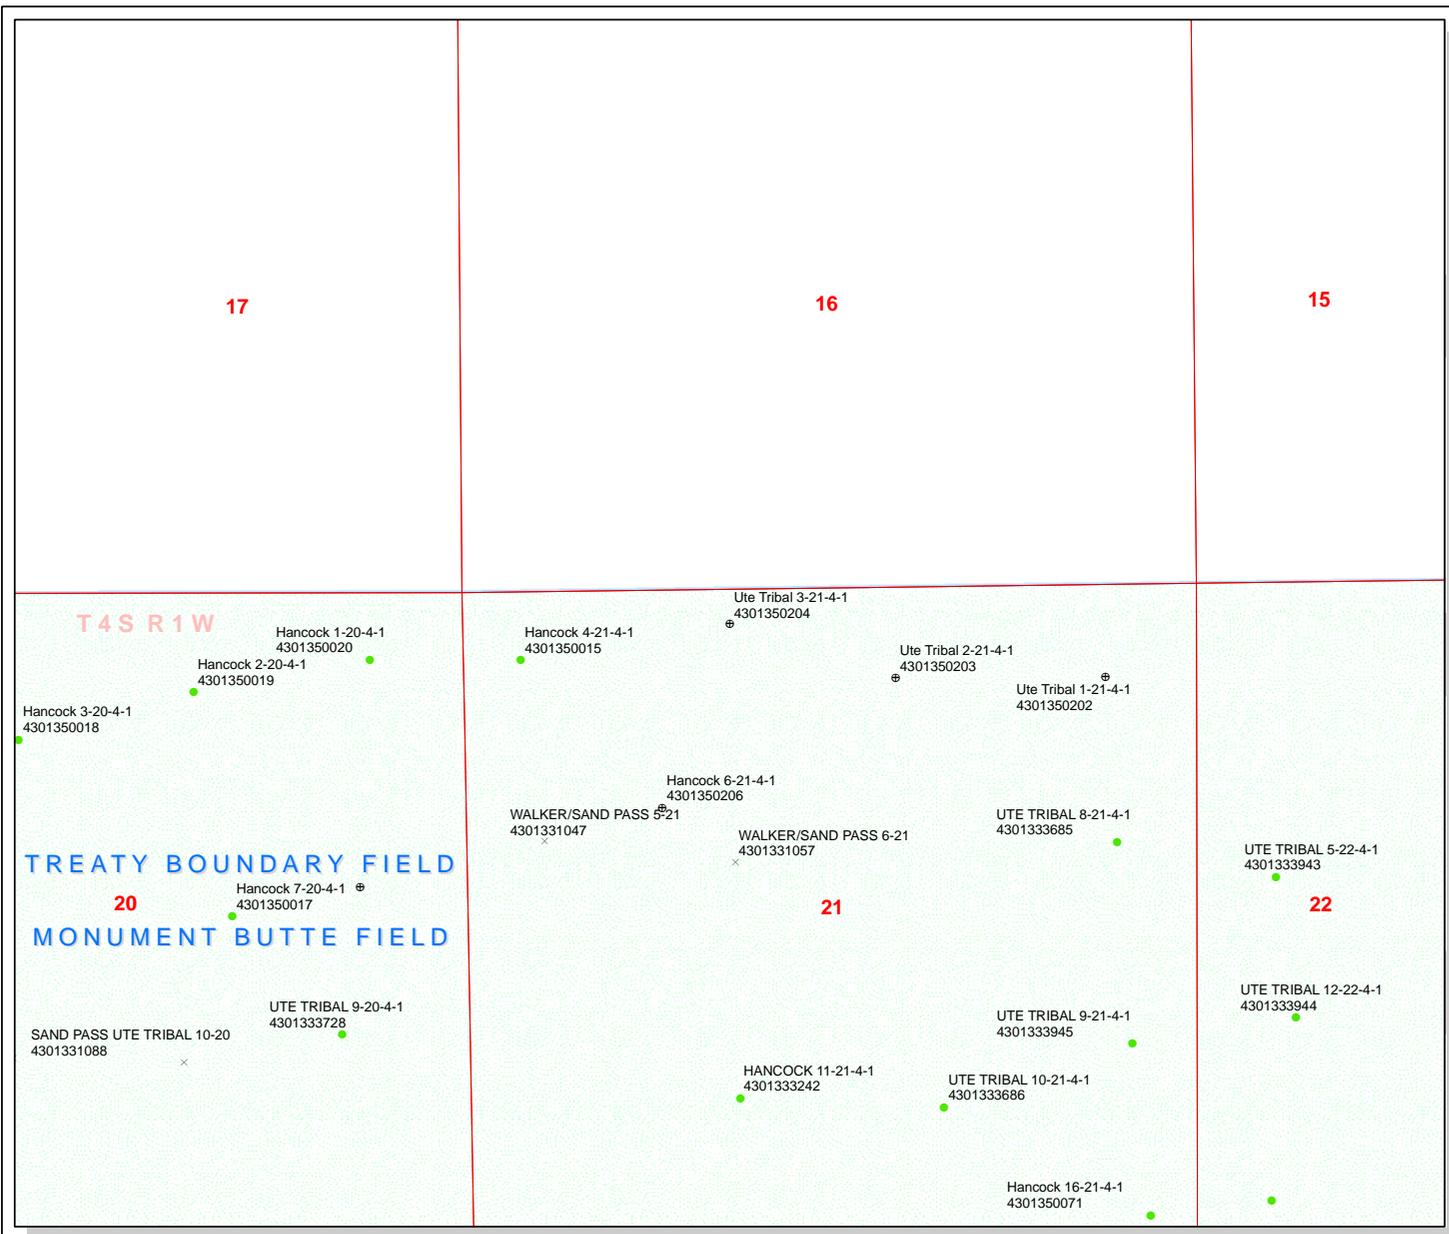

ON-SITE PREDRILL EVALUATION

Utah Division of Oil, Gas and Mining

Operator	NEWFIELD PRODUCTION COMPANY				
Well Name	Ute Tribal 3-21-4-1				
API Number	43013502040000	APD No	2229	Field/Unit	MONUMENT BUTTE
Location: 1/4,1/4	NENW	Sec 21	Tw 4.0S	Rng 1.0W	235 FNL 1933 FWL
GPS Coord (UTM)	584920	4442142	Surface Owner	Gerald N. Andersen Family Trust	

Participants

Floyd Bartlett (DOGM), Tim Eaton, Brian Foote (Newfield Production Co.), Cory Miller and Tyson Reary (Tri State Land Surveying), James Hereferd (Bureau of Land Management).

Regional/Local Setting & Topography

The location is approximately 10.5 road miles southwest of Myton, UT in a sub-drainage of Pleasant Valley Wash which drains into the Pariette Draw drainage of Duchesne County. Both of these draws contain perennial streams somewhat consisting of irrigation runoff and seepage. Pariette Draw runs into the Green River approximately 6 miles downstream from Ouray, Utah and about 12 miles downstream from the location. Broad flats in Pleasant Valley frequently used for agriculture characterize the area. Flats are intersected by drainages with gentle to moderate side slopes. Access is by State and County and existing or planned oil field development roads. Approximately 70 feet of new construction across Anderson's private land will be required to reach the location.

The proposed Hancock 3-21-4-1 oil well pad is laid out in an east-west direction on a rise or knob beyond the edge of a cornfield irrigated by a pivot sprinkler. The broken terrain slopes moderately gently to the east and west of this knob that will be excavated to form the pad. The fill from Corner 5-6 extends onto a small wet area as identified by a riparian type vegetation. The site has no value for agriculture. No diversions are needed.

The selected location should be suitable and stable for constructing the pad, drilling and operating the proposed well.

Gerarld Anderson owns the surface of the location and surrounding area.

Surface Use Plan

Current Surface Use

- Grazing
- Agricultural
- Recreational
- Wildlfe Habitat
- Recreational

New Road Miles	Well Pad	Src Const Material	Surface Formation
0.01	Width 204 Length 305	Onsite	UNTA

Ancillary Facilities N

Waste Management Plan Adequate?

Environmental Parameters

Affected Floodplains and/or Wetlands N

Flora / Fauna

The site was covered with about 6 inches of snow. Identified vegetation included rabbit brush, prickly pear, coyote willow, greasewood, annual weeds and bullrush.

Cattle, deer, small mammals and birds.

Soil Type and Characteristics

Deep gravely sandy loam.

Erosion Issues N

Sedimentation Issues N

Site Stability Issues N

Drainage Diversion Required? N

Berm Required? Y

Erosion Sedimentation Control Required? N

Paleo Survey Run? N **Paleo Potential Observed?** N **Cultural Survey Run?** N **Cultural Resources?**

Reserve Pit

Site-Specific Factors

Site Ranking

Distance to Groundwater (feet)		20
Distance to Surface Water (feet)	100 to 200	15
Dist. Nearest Municipal Well (ft)	>5280	0
Distance to Other Wells (feet)	300 to 1320	10
Native Soil Type	Mod permeability	10
Fluid Type	Fresh Water	5
Drill Cuttings	Normal Rock	0
Annual Precipitation (inches)		0
Affected Populations		
Presence Nearby Utility Conduits	Not Present	0
Final Score		60

1 Sensitivity Level

Characteristics / Requirements

The reserve pit will be 40' x 80' x 8' deep located in an area of cut on the southeast side of the location. A pit liner is required. Newfield commonly uses a 16-mil liner.

Closed Loop Mud Required? N **Liner Required?** Y **Liner Thickness** 16 **Pit Underlayment Required?** Y

Other Observations / Comments

Floyd Bartlett
Evaluator

1/15/2010
Date / Time

Application for Permit to Drill Statement of Basis

3/2/2010

Utah Division of Oil, Gas and Mining

Page 1

APD No	API WellNo	Status	Well Type	Surf Owner	CBM
2229	43013502040000	LOCKED	OW	P	No
Operator	NEWFIELD PRODUCTION COMPANY		Surface Owner-APD	Gerald N. Andersen Family Trust	
Well Name	Ute Tribal 3-21-4-1		Unit		
Field	MONUMENT BUTTE		Type of Work	DRILL	
Location	NENW 21 4S 1W U 235 FNL 1933 FWL GPS Coord (UTM) 584922E 4442128N				

Geologic Statement of Basis

The mineral rights for the proposed well are owned by the Ute Tribe. The BLM will be the agency responsible for evaluating and approving the proposed drilling, casing and cementing programs.

Brad Hill
APD Evaluator

1/28/2010
Date / Time

Surface Statement of Basis

The location is approximately 10.5 road miles southwest of Myton, UT in a sub-drainage of Pleasant Valley Wash which drains into the Pariette Draw drainage of Duchesne County. Both of these draws contain perennial streams somewhat consisting of irrigation runoff and seepage. Pariette Draw runs into the Green River approximately 6 miles downstream from Ouray, Utah and about 12 miles downstream from the location. Broad flats in Pleasant Valley frequently used for agriculture characterize the area. Flats are intersected by drainages with gentle to moderate side slopes. Access is by State and County and existing or planned oil field development roads. Approximately 70 feet of new construction across Anderson's private land will be required to reach the location.

The proposed Hancock 3-21-4-1 oil well pad is laid out in an east-west direction on a rise or knob beyond the edge of a cornfield irrigated by a pivot sprinkler. The broken terrain slopes moderately gently to the east and west of this knob that will be excavated to form the pad. The fill from Corner 5-6 extends onto a small wet area as identified by a riparian type vegetation. The site has no value for agriculture. No diversions are needed.

The selected location should be suitable and stable for constructing the pad, drilling and operating the proposed well.

Gerard Anderson owns the surface of the location and surrounding area. A surface use agreement has been signed. Mr. Anderson was invited by telephone to the pre-site visit. He said he would not attend. The minerals are owned by the United States Government and held in trust for the Ute Indian Tribe. Mr. James Hereford of the BLM, who acts for the Ute Indian Tribe, attended the pre-site and had no concerns regarding the area.

Floyd Bartlett
Onsite Evaluator

1/15/2010
Date / Time

Conditions of Approval / Application for Permit to Drill

Category	Condition
Pits	A synthetic liner with a minimum thickness of 16 mils with a felt subliner shall be properly installed and maintained in the reserve pit.
Surface	The well site shall be bermed to prevent fluids from leaving the pad.
Surface	The reserve pit shall be fenced upon completion of drilling operations.

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 12/15/2009

API NO. ASSIGNED: 43013502040000

WELL NAME: Ute Tribal 3-21-4-1

OPERATOR: NEWFIELD PRODUCTION COMPANY (N2695)

PHONE NUMBER: 435 646-4825

CONTACT: Mandie Crozier

PROPOSED LOCATION: NENW 21 040S 010W

Permit Tech Review:

SURFACE: 0235 FNL 1933 FWL

Engineering Review:

BOTTOM: 0235 FNL 1933 FWL

Geology Review:

COUNTY: DUCHESNE

LATITUDE: 40.12709

LONGITUDE: -110.00331

UTM SURF EASTINGS: 584922.00

NORTHINGS: 4442128.00

FIELD NAME: MONUMENT BUTTE

LEASE TYPE: 2 - Indian

LEASE NUMBER: 14-20-H62-5609

PROPOSED PRODUCING FORMATION(S): GREEN RIVER

SURFACE OWNER: 4 - Fee

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

- PLAT**
- Bond:** FEDERAL - WYB000493
- Potash**
- Oil Shale 190-5**
- Oil Shale 190-3**
- Oil Shale 190-13**
- Water Permit:** 43-7478
- RDCC Review:**
- Fee Surface Agreement**
- Intent to Commingle**

Commingle Approved

LOCATION AND SITING:

- R649-2-3.**
 - Unit:**
 - R649-3-2. General**
 - R649-3-3. Exception**
 - Drilling Unit**
 - Board Cause No:** R649-3-3
 - Effective Date:**
 - Siting:**
 - R649-3-11. Directional Drill**
-

Comments: Presite Completed

Stipulations: 4 - Federal Approval - dmason
5 - Statement of Basis - bhill
23 - Spacing - dmason



February 25, 2010

2229

State of Utah, Division of Oil, Gas & Mining
ATTN: Diana Mason
PO Box 145801
Salt Lake City, UT 84114-5801

RE: Exception Location
Ute Tribal 3-21-4-1
T4S R1W, Section 21: NENW
235'FNL 1933' FWL
Duchesne County, Utah

Dear Ms. Mason;

Pursuant to Rule 649-3-3 of the Oil & Gas Rules and Regulations of the State of Utah, Newfield Production Company ("NPC") hereby requests an exception location for the drilling of the captioned well. The proposed drillsite for this well is located 225' north of the drilling window required by Rule R649-3-2, which requires a well to be located in the center of a forty (40) acre quarter-quarter section, or a substantially equivalent lot or tract, with a tolerance of two hundred (200) feet in any direction from the center.

The attached plat depicts the proposed location and illustrates the deviation from the drilling window. The requested location has been chosen to accommodate the surface owner.

Please note the drillsite is on fee acreage and the leasehold is owned by NPC. The location is less than 460' from acreage owned by the Ute Indian Tribe. A copy of the Ute Indian Tribe's consents to this location has been enclosed.

If you have any questions or require further information, please do not hesitate to contact the undersigned at 303-383-4137 or by email at awild@newfield.com. Your consideration of this matter is greatly appreciated.

Sincerely,

A handwritten signature in blue ink, appearing to read "Alan Wild", is written over a faint, illegible printed name.

Alan Wild
Land Associate

Attachment

RECEIVED
MAR 01 2010
DIV. OF OIL, GAS & MINING



December 15, 2009

Ute Indian Tribe
Energy Minerals Dept.
Attn: Larry Love
P.O. Box 70
Fort Duchesne, UT 84026

Re: Exception Location
Ute Tribal 3-21-4-1
Duchesne County, Utah

Dear Mr. Love:

In accordance with Section 3.1.D of the Exploration & Development Agreement dated December 22, 2006 among the Ute Indian Tribe, Newfield Production Company and the Ute Distribution Corporation, please be advised that Newfield is requesting approval from the Utah Division of Oil, Gas & Mining for the following well:

Ute Tribal 3-21-4-1
T4S R1W, Section 21: NENW
235' FNL 1933' FWL
Duchesne County, Utah

TRIBAL / EDA 5609 DRILLING BLOCK B

The location of this well is outside the drilling window as required by State of Utah R649-3-2. It has been moved at the request of the surface owner. Therefore, it is necessary to obtain your written concurrence with this exception location as an affected party.

Enclosed you will find a plat showing the location of the above referenced well. If you are in agreement to this location, please verify your consent by signing and dating where indicated on page 2 of this letter and return to my attention **as soon as possible**. You may mail your consent to the letterhead address, fax to 303-893-0103 or email to awild@newfield.com.

If you have any questions or need further information, please do not hesitate to contact me at 303-382-4137 or by email at awild@newfield.com. I appreciate your prompt attention to this matter.

Sincerely,


Alan D. Wild
Land Associate

UTE INDIAN TRIBE
ENERGY & MINERALS DEPT.

DEC 21 2009

RECEIVED

MAR 01 2010

RECEIVED BY 
FORT DUCHESNE, UT

DIV. OF OIL, GAS & MINING

Return to: Newfield Production Company
ATTN: Alan Wild
1001 17th Street, Suite 2000
Denver, CO 80202

303-893-0103 fax

awild@newfield.com email

Re: Exception Location
Ute Tribal 3-21-4-1
T4S R1W, Section 21: NENW
235' FNL 1933' FWL
Duchesne County, Utah

Please be advised The Ute Indian Tribe does not have an objection to the proposed location of the
aforementioned well.

By: _____



Larry W Love, Energy + Minerals Director
Print Name and Title

Date: 12-30-2009



State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: Ute Tribal 3-21-4-1
API Well Number: 43013502040000
Lease Number: 14-20-H62-5609
Surface Owner: FEE (PRIVATE)
Approval Date: 3/3/2010

Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of R649-3-3. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis (copy attached).

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during

drilling of this well:


- Within 24 hours following the spudding of the well – contact Carol Daniels at 801-538-5284 (please leave a voicemail message if not available)
- OR
- submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <https://oilgas.ogm.utah.gov>

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

Approved By:



Gil Hunt
Associate Director, Oil & Gas

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

5. LEASE DESIGNATION AND SERIAL NUMBER:
MON BUTTE EDA 20G0005609

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL: OIL WELL GAS WELL OTHER

2. NAME OF OPERATOR:
NEWFIELD PRODUCTION COMPANY

3. ADDRESS OF OPERATOR: Route 3 Box 3630 CITY Myton STATE UT ZIP 84052 PHONE NUMBER 435.646.3721

4. LOCATION OF WELL:
FOOTAGES AT SURFACE: 0935 FWL 1933 FWL COUNTY: DUCHESNE

OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: NENW, 21, T4S, R1W STATE: UT

8. WELL NAME and NUMBER:
UTE TRIBAL 3-21-4-1

9. API NUMBER:
4301350204


10. FIELD AND POOL, OR WILDCAT:
MYTON/TRIBAL EDA

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: 05/13/2010	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARITLY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLAIR
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/STOP)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: - Weekly Status Report
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
The above subject well was completed on 05-13-10, attached is a daily completion status report.

NAME (PLEASE PRINT) Lucy Chavez-Naupoto TITLE Administrative Assistant

SIGNATURE  DATE 05/24/2010

(This space for State use only)

RECEIVED
JUN 03 2010
DIV. OF OIL, GAS & MINING

Daily Activity Report

Format For Sundry

UTE TRIBAL 3-21-4-1

3/1/2010 To 7/30/2010

5/4/2010 Day: 1

Completion

Rigless on 5/4/2010 - Ran CBL & shot 1st stage - Install 5m frac head. NU 6" 5K Cameron BOP. RU H/O truck & pressure test casing, blind rams, frac head, csg & casing valves to 4500 psi. RU Perforators LLC WLT w/ mast & run CBL under pressure. WLTD @ 7110' & cement top @ 160'. Perforate stage #1, Wstch sds @ 6998-7008' & 6978-81' w/ 3 1/8" Port plug guns (11 gram .36" EH 16.82" pen) w/ 3 spf for total of 39 shots. 170 BWTR. SWIFN.

Daily Cost: \$0

Cumulative Cost: \$12,990

5/10/2010 Day: 2

Completion

Rigless on 5/10/2010 - Frac, perforate & flow back well. - Frac & perforate well as detailed. Open for immediate flowback @ approx 3 BPM. Well flowed for 6 hours & died. Recovered approx 860 bbls. 1617 BWTR.

Daily Cost: \$0

Cumulative Cost: \$120,015

5/12/2010 Day: 3

Completion

NC #2 on 5/12/2010 - MIRUSU, X - Over BOPS, P/U Tbg - 5:30 To 6:00 AM C/Trvl, 6:00 AM OWU, MIRUSU, Well Was Flowing, R/U The Perforators Wireline, Set Kill Plg @ 4980', R/D Wireline, R/D Cameron BOPS, R/U Weatherford BOPS, R/U Workfloor, P/U & TIH W/- Bit & Bit Sub, 150- Jts Tbg, CSDFN @ 7:00 PM, 7:00 To 7:30 PM C/Trvl. - 5:30 To 6:00 AM C/Trvl, 6:00 AM OWU, MIRUSU, Well Was Flowing, R/U The Perforators Wireline, Set Kill Plg @ 4980', R/D Wireline, R/D Cameron BOPS, R/U Weatherford BOPS, R/U Workfloor, P/U & TIH W/- Bit & Bit Sub, 150- Jts Tbg, CSDFN @ 7:00 PM, 7:00 To 7:30 PM C/Trvl. - 5:30 To 6:00 AM C/Trvl, 6:00 AM OWU, R/U Pwr Swivl, Swvl In The Hole To Plg #1 @ 4978', Drill Up Plg, 29 Min Drill Time, Swvl In The Hole To Plg #2 @ 5153', Drill Up Plg, 35 Min Drill Time, Swvl In The Hole To Plg #3 @ 5849', Plg Had 3' Of Fill On Top, Drill Up Plg, 31 Min Drill Time, Swvl In The Hole To Plg #4 @ 6257', Plg Had 6' Of fill On Top, Drill Up Plg, 34 Min Drill Time, Swvl In The Hole To Plg #5 @ 6589', Drill Up Plg, 30 Min Drill Time, Swvl In The Hole To PBTD @ 7165', PBTD Had 48' Of Fill, Circ Wellbore Clean For 1 Hr, POOH W/- 5 Jts Tbg, R/U Sandline, Swab Approx. 120 Bbls Fluid, SWI, CSDFN @ 7:00 PM, 7:00 To 7:30 PM C/Trvl. - 5:30 To 6:00 AM C/Trvl, 6:00 AM OWU, R/U Pwr Swivl, Swvl In The Hole To Plg #1 @ 4978', Drill Up Plg, 29 Min Drill Time, Swvl In The Hole To Plg #2 @ 5153', Drill Up Plg, 35 Min Drill Time, Swvl In The Hole To Plg #3 @ 5849', Plg Had 3' Of Fill On Top, Drill Up Plg, 31 Min Drill Time, Swvl In The Hole To Plg #4 @ 6257', Plg Had 6' Of fill On Top, Drill Up Plg, 34 Min Drill Time, Swvl In The Hole To Plg #5 @ 6589', Drill Up Plg, 30 Min Drill Time, Swvl In The Hole To PBTD @ 7165', PBTD Had 48' Of Fill, Circ Wellbore Clean For 1 Hr, POOH W/- 5 Jts Tbg, R/U Sandline, Swab Approx. 120 Bbls Fluid, SWI, CSDFN @ 7:00 PM, 7:00 To 7:30 PM C/Trvl.

Daily Cost: \$0

Cumulative Cost: \$128,905

5/13/2010 Day: 5

Completion

NC #2 on 5/13/2010 - Round Trip Tbg, TIH W/- Rod String, PWOP - 5:30 To 6:00 AM C/Trvl,

6:00 AM OWU, Well Was Flowing, R/D Sandline, Kill Well, TIH W/- 5 Jts Tbg, Circ Wellbore Clean For 1 Hr, L/D 4 Jts Tbg, POOH W/- 224 Jts Tbg, P/U & TIH W/- NC, 2- Jts Tbg, SN, 1- Jt Tbg, TA, 221- Jts Tbg, Set TA In 18000 Lbs Tension, R/D Weatherford BOPS, R/U Wellhead, X - Over For Rods, P/U & Stroke Test W/- Central Hydraulics 2 1/2 x 1 1/2 x 21 x 24' RHAC Rod Pump (Max STL 230"), TIH W/- Pmp, 6- 1 1/2" x 25' Wt Bars, 19- 3/4" Guided Rods, 154- 3/4" Plain Rods, 99- 7/8" Guided Rods, 1- 2' x 7/8" Pony Sub, 1 1/2" x 26' Polished Rod, R/U Pmp Unit, Stoke Test To 800 Psi Using Pmp Unit, Good Test, R/D NC #2, PWOP @ 7:00 PM, STL122", 5 SPM. FINAL REPORT **Finalized**

Daily Cost: \$0

Cumulative Cost: \$217,778

Pertinent Files: Go to File List

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well Oil Well Gas Well Dry Other
 b. Type of Completion: New Well Work Over Deepen Plug Back Diff. Reserv.,
 Other: _____

5. Lease Serial No.
EDA 20G0005609

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No.

2. Name of Operator
NEWFIELD EXPLORATION COMPANY

8. Lease Name and Well No.
UTE TRIBAL 3-21-4-1

3. Address
1401 17TH ST. SUITE 1000 DENVER, CO 80202

3a. Phone No. (include area code)
(435)646-3721

9. AFI Well No.
43-013-50204

4. Location of Well (Report location clearly and in accordance with Federal requirements)*

10. Field and Pool or Exploratory
MONUMENT BUTTE

At surface 235' FNL & 1933' FWL (NE/NW) SEC. 21, T4S, R1W

11. Sec., T., R., M., on Block and
Survey or Area
SEC. 21, T4S, R1W

At top prod. interval reported below

12. County or Parish
DUCHESNE

13. State
UT

At total depth 7180'

14. Date Spudded
04/13/2010

15. Date T.D. Reached
04/27/2010

16. Date Completed 05/13/2010
 D & A Ready to Prod.

17. Elevations (DF, RKB, RT, GL)*
5125' GL 5137' KB

18. Total Depth: MD 7180'
TVD

19. Plug Back T.D.: MD 7165'
TVD

20. Depth Bridge Plug Set: MD
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
DUAL IND GRD, SP, COMP. DENSITY, COMP. NEUTRON, GR, CALIPER, CMT BOND

22. Was well cored? No Yes (Submit analysis)
Was DST run? No Yes (Submit report)
Directional Survey? No Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	8-5/8" J-55	24#	0	321'		160 CLASS G			
7-7/8"	5-1/2" J-55	15.5#	0	7182'		300 PRIMLITE		160'	
						441 50/50 POZ			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-7/8"	EOT@ 7060'	TA @ 6961'						

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Green River			6978-7008' Wasatch	.36"	3	39
B) Green River			6522-6528' CP3	.34"	3	18
C) Green River			6155-6202' LODC	.34"	3	27
D) Green River			5762-5770' C	.34"	3	24

26. Perforation Record 5058-

Depth Interval	Amount and Type of Material
6978-7008'	Frac w/ 78889#'s 20/40 sand in 487 bbls of Lightning 17 fluid.
6522-6528'	Frac w/ 34171#'s 20/40 sand in 243 bbls of Lightning 17 fluid.
6155-6202'	Frac w/ 60292#'s 20/40 sand in 316 bbls of Lightning 17 fluid.
5762-5770'	Frac w/ 45200#'s 20/40 sand in 294 bbls of Lightning 17 fluid.

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
5-14-10	5-28-10	24	→	67	0	17			2-1/2" x 1-1/2" x 21' x 24' RHAC Pump
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→					PRODUCING	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

*(See instructions and spaces for additional data on page 2)

RECEIVED

JUN 15 2010

DIV. OF OIL, GAS & MINING

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

29. Disposition of Gas (Solid, used for fuel, vented, etc.)

USED FOR FUEL

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

GEOLOGICAL MARKERS

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
				GARDEN GULCH MRK GARDEN GULCH 1	4532' 4732'
				GARDEN GULCH 2 POINT 3	4851' 5144'
				X MRKR Y MRKR	5367' 5402'
				DOUGALS CREEK MRK BI CARBONATE MRK	5534' 5830'
				B LIMESTON MRK CASTLE PEAK	5950' 6406'
				BASAL CARBONATE WASATCH	6789' 6928'


32. Additional remarks (include plugging procedure):

Stage 5: Green River Formation (GB4) 5058-5080", .34" 3/18 Frac w/ 19514#s of 20/40 sand in 170 bbls of Lightning 17 fluid

33. Indicate which items have been attached by placing a check in the appropriate boxes:

- Electrical/Mechanical Logs (1 full set req'd.)
 Geologic Report
 DST Report
 Directional Survey
 Sundry Notice for plugging and cement verification
 Core Analysis
 Other: Drilling Daily Activity

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Lucy Chavez-Naupoto Title Administrative Assistant
 Signature  Date 06/11/2010

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Daily Activity Report

Format For Sundry

UTE TRIBAL 3-21-4-1**2/1/2010 To 6/30/2010****UTE TRIBAL 3-21-4-1****Waiting on Cement****Date:** 4/15/2010

Ross #21 at 320. Days Since Spud - casing (guide shoe, shoe jt, baffle plate, 6 jts) set @ 321.0' KB. On 4/15/10 BJ Services cemented - 8 5/8" casing w/ 160 sks Class "G" + 2% CaCl₂ + 0.25#/sk Cello Flake at 15.8 ppg w/ 1.17 yield. - On 4/13/10 Ross Rig #21 spud Ute Tribal 3-21-4-1, drilled 320' of 12 1/4" hole, and ran 7 jts 8 5/8" - Returned 3 bbls to pit.

Daily Cost: \$0**Cumulative Cost:** \$29,885**UTE TRIBAL 3-21-4-1****Waiting on Cement****Date:** 4/23/2010

NDSI #1 at 320. 0 Days Since Spud - rig down and prepare for move

Daily Cost: \$0**Cumulative Cost:** \$31,823**UTE TRIBAL 3-21-4-1****Drill 7 7/8" hole with fresh water****Date:** 4/24/2010

NDSI #1 at 1183. 1 Days Since Spud - Drill 7 7/8" hole f/ 290' to 1183' w/ 15 K WOB, TRPM-130, GPM-350, Avg ROP-78 ft/hr - P/U MI616 Bit, .208 Hunting M.M, NMDC, Gap sub and 6 DC's and tag @ 290' - Move rig 4.5 miles to UT 3-21-4-1 w/ RWJones and set equipment - Weld brace on kelly for spinners, and weld on kelly sock - Test. Kelly, pipe&blind rams, safety valve, choke to 2000#/10min, test Surface casing 1500# / 30 minute - No H₂S or flow reported in last 24 hours

Daily Cost: \$0**Cumulative Cost:** \$56,905**UTE TRIBAL 3-21-4-1****Drill 7 7/8" hole with fresh water****Date:** 4/25/2010

NDSI #1 at 3813. 2 Days Since Spud - Drill 7 7/8" hole F/ 2247' to 3030' w/ 20K WOB, TRPM-125, GPM-340, Avg RoP-156 ft/hr - Test crownomatic and BOP - Drill 7 7/8" hole F/ 3030' to 3813' w/ 20K WOB, TRPM-125, GPM-340, Avg ROP-87 ft/hr - No H₂S or flow in last 24 hours - Rig Service, function test crownomatic and BOP - Drill 7 7/8" hole F/ 1183' to 2247' w/ 20K WOB, TRPM-125, GPM-340, Avg ROP-118 ft/hr

Daily Cost: \$0**Cumulative Cost:** \$91,375**UTE TRIBAL 3-21-4-1****Drill 7 7/8" hole with fresh water****Date:** 4/26/2010

NDSI #1 at 5660. 3 Days Since Spud - Rig service - function test BOP and crownomatic. - Drill 7 7/8" hole from 4283' to 4721' w/ 20,000 WOB, 127 total RPM, 350 GPM, 67 ft/hr avg ROP - Drill 7 7/8" hole from 4721' to 5660' w/ 20,000 WOB, 120 total RPM, 333 GPM, 78 ft/hr avg ROP - Drill 7 7/8" hole from 3813' to 4283' w/ 20,000 WOB, 127 total RPM, 350 GPM, 94 ft/hr avg ROP

Daily Cost: \$0**Cumulative Cost:** \$119,652

UTE TRIBAL 3-21-4-1**Lay Down Drill Pipe/BHA****Date:** 4/27/2010

NDSI #1 at 7180. 4 Days Since Spud - Circulate up bottoms at 127 SPM. - Drill 7 7/8" hole from 6818' to TD (7180') w/ 20,000 WOB, 120 total RPM, 340 GPM, 80 ft/hr avg ROP - Fix chain in draw works. - Drill 7 7/8" hole from 6536' to 6818' w/ 20,000 WOB, 120 total RPM, 340 GPM, 71 ft/hr avg ROP - Drill 7 7/8" hole from 6442' to 6536' w/ 20,000 WOB, 120 total RPM, 340 GPM, 63 ft/hr avg ROP - Rig service - Drill 7 7/8" hole from 5660' to 6442' w/ 20,000 WOB, 120 total RPM, 340 GPM, 78 ft/hr avg ROP - Lay down drill pipe.

Daily Cost: \$0**Cumulative Cost:** \$139,829

UTE TRIBAL 3-21-4-1**Waiting on Cement****Date:** 4/28/2010

NDSI #1 at 7180. 5 Days Since Spud - Clean mud tanks. - Nipple down and set slips w/ 130,000# tension. - of fresh water. Returned 25 bbls cement to pit and bumped plug to 1900 psi. - @ 14.4 ppg & 1.24 yield (50:50:2+3%KCL+.5%EC-1+.25#CF+.5#SF+.3SMS+FP-6L). Displaced w/ 170.6 bbls - Pump 300 sks lead @ 11 ppg & 3.53 yield (PLII+3% KCL+5#CSE+.5#CF+.5SMS+FP+SF). Pump 441 sks of tail - Circulate mud and rig up BJ Services for production cement. - Release rig @ 12:30 am on 4/28/10. - Condition mud and circulate. Fill at flag joint. - and top of short jt @ 4457.67'. Transferred 6 jts (262.89') to Hancock 6-21-4-1. Ran w/ QT Casing. - Start running 165 jts 5.5" J-55 15.5# casing set @ 7,181.87'. Top of float collar @ 7,166.62' - Rig up B&C Quicktest and test 5 1/2" casing rams to 2000# for 10 minutes. All tested good. - Rig up PSI and run triple combo wireline logs with PSI from logger's TD (7200') to surface. - Finish laying down drill pipe and BHA. - Finish running casing. **Finalized**

Daily Cost: \$0**Cumulative Cost:** \$274,387

Pertinent Files: Go to File List

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
A	99999	17741	4301350295	STEWART 4-24-4-2	NWNW	24	4S	2W	DUCHESNE	8/6/2010	8/19/10
WELL 1 COMMENTS: GRRV											
A	99999	17742	4301350305	STEWART 5-24-4-2	SWNW	24	4S	2W	DUCHESNE	8/6/2010	8/19/10
GRRV											
B	99999	17400	4301334182	FEDERAL 12-30-8-16	NWSW	30	8S	16E	DUCHESNE	8/4/2010	8/19/10
GRRV											
O	99999	17588	4301334048	UTE TRIBAL 12-30-4-2	NWSW	30	4S	2W	DUCHESNE	4/10/2010	5/15/10
CHANGE FORMATION F/ GRRV TO GR-WS											
O	99999	17636	4301350164	UTE TRIBAL 15-26-4-3	SWSE	26	4S	3W	DUCHESNE	5/28/2010	6/26/10
WELL 5 COMMENTS: CHANGE FORMATION F/ GRRV TO GR-WS											
O	99999	17587	4301350204	UTE TRIBAL 3-21-4-1	NENW	21	4S	1W	DUCHESNE	4/13/2010	5/13/10
WELL 5 COMMENTS: CHANGE FORMATION F/ GRRV TO GR-WS											


CONFIDENTIAL 8/19/10
CONFIDENTIAL 8/19/10

ACTION CODES (See instructions on back of form)
 A - new entity for new well (single well only)
 B - well to existing entity (group or unit well)
 C - from one existing entity to another existing entity
 D - well from one existing entity to a new entity
 E - other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

RECEIVED
 AUG 10 2010

DIV. OF OIL, GAS & MINING

Signature: 
 Jentri Park
 Production Clerk
 Date: 08/10/10

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. 20G0005609
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name UTE
2. Name of Operator Newfield Production Company		7. If Unit or CA Agreement, Name and No. NA
3a. Address Route #3 Box 3630, Myton UT 84052	3b. Phone No. (include area code) (435) 646-3721	8. Lease Name and Well No. Ute Tribal 3-21-4-1
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NE/NW 235' FNL 1933' FWL At proposed prod. zone		9. API Well No. 43 013 5020A
14. Distance in miles and direction from nearest town or post office* Approximately 10.6 miles southeast of Myton, UT		10. Field and Pool, or Exploratory Undesignated
15. Distance from proposed* location to nearest property or lease line, ft. Approx. 235' f/lse, NA' f/unit (Also to nearest drig. unit line, if any)	16. No. of acres in lease NA	11. Sec., T. R. M. or Blk. and Survey or Area Sec. 21, T4S R1W
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1584'	19. Proposed Depth 6,945'	12. County or Parish Duchesne
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5125' GL	22. Approximate date work will start* 2nd Qtr. 2010	13. State UT
20. BLM/BIA Bond No. on file WYB000493		
23. Estimated duration (7) days from SPUD to rig release		

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, must be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM. |

25. Signature <i>Mandie Crozier</i>	Name (Printed/Typed) Mandie Crozier	Date 10/5/10
--	--	-----------------

Title
Regulatory Specialist

Approved by (Signature) <i>James H. Sparger</i>	Name (Printed/Typed) James H. Sparger	Date MAR 14 2010
--	--	---------------------

Title ACTING Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE
--	-------------------------------

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached. **CONDITIONS OF APPROVAL ATTACHED**

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations in any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

2010 JUN 26 PM 12 42

RECEIVED
VERNAL FIELD OFFICE

NOTICE OF APPROVAL

APR 01 2010

DIV OF OIL, GAS & GEOTHERMAL






UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Newfield Production Company
Well No: Ute Tribal 3-21-4-1
API No: 43-013-50204

Location: NENW, Sec. 21, T4S, R1W
Lease No: 2OG0005609
Agreement: N/A

OFFICE NUMBER: (435) 781-4400

OFFICE FAX NUMBER: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Construction Activity (Notify Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist)	- The Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist shall be notified at least 48 hours in advance of any construction activity. The Ute Tribal office is open Monday through Thursday.
Construction Completion (Notify Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist)	- Upon completion of the pertinent APD/ROW construction, notify the Ute Tribe Energy & Minerals Dept. for a Tribal Technician to verify the Affidavit of Completion. Notify the BLM Environmental Scientist prior to moving on the drilling rig.
Spud Notice (Notify BLM Petroleum Engineer)	- Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify BLM Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to running casing and cementing all casing strings to: ut_vn_opreport@blm.gov .
BOP & Related Equipment Tests (Notify BLM Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify BLM Petroleum Engineer)	- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

RECEIVED

APR 01 2010

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

- NONE

RECEIVED

APR 01 2010

DIV. OF OIL, GAS & MINES

**DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

RECEIVED

APR 01 2010

DEPT. OF OIL, GAS & ENERGY

SITE SPECIFIC DOWNHOLE COAs:

Variations Granted:

Drilling:

- Variance on using a diverter bowl in place of a rotating head. The diverter bowl forces the air and cutting returns to the reserve pit and is used to drill the surface casing (surface to a total depth of 350 feet). The surface casing occurs within the Uinta Formation which is a non-hydrocarbon bearing zone and thus has no possibility of gas pressure.
- Variance is granted on using a blooie line with a discharge less than 100 feet from the wellbore in order to minimize the size of the well pads and direct the cuttings and circulating mediums into the reserve pit. The well bore is located approximately 35 feet from the reserve pit which is 40 feet wide; a 100 foot blooie line would discharge the cuttings and circulating mediums across the reserve pit and off the location. The requested length of the blooie line to drill the surface casing (surface to a total depth of 350 feet) is 35 feet. The surface casing occurs within the Uinta Formation which is a non-hydrocarbon bearing zone and thus has no possibility of gas pressure.
- Variance is granted on operating without an automatic igniter or continuous pilot light on the blooie line due to the fact the air rig is only used to drill the surface casing (surface to a total depth of 350 feet). The surface casing occurs within the Uinta Formation which is a non-hydrocarbon bearing zone and thus has no possibility of gas pressure.
- Variance granted permission to use a trailer mounted compressor located less than 100 feet from the well bore in order to minimize the well pad size. The trailer mounted compressor is located 50 feet from the wellbore and in an opposite direction of the blooie line. The compressor has the following safety features: (1) shut off valve on the trailer that is located approximately 15 ft from the air rig, (2) pressure relief valve on the compressor, and (3) Spark arresters on the motors. The compressor only used in the drilling of the surface casing (surface to a total depth of 350 feet). The surface casing occurs within the Uinta Formation which is a non-hydrocarbon bearing zone and thus has no possibility of gas pressure.
- Operator must notify BLM Vernal office of any active Gilsonite operation within 2 miles of the location 48 hours prior to any blasting on this well location.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.

RECEIVED

APR 01 2010

Page 4 of 7
Well: Ute Tribal 3-21-4-1
1/28/2010

ONSHORE OIL & GAS ORDER

- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**

- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

RECEIVED

APR 01 2010

DM OF OIL, GAS & MIN.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location ($\frac{1}{4}$, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or

RECEIVED

APR 01 2010

DIR. OF OIL, GAS & MINING

APR 01 2010

DEPARTMENT OF ENERGY

data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other Instructions on page 2

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630
Myton, UT 84052

3b. Phone (include are code)
435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

NENW Section 21 T4S R1W

5. Lease Serial No.
MON BUTTE EDA 20G0005609

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or

8. Well Name and No.
UTE TRIBAL 3-21-4-1

9. API Well No.
4301350204

10. Field and Pool, or Exploratory Area
MONUMENT BUTTE

11. County or Parish, State

DUCHESNE, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Spud Notice
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	


13. Describe Proposed or Completed Operation: (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 4/13/10 MIRU Ross # 21. Spud well @ 9:00 AM. Drill 320' of 12 1/4" hole with air mist. TIH W/ 7 Jt's 8 5/8" J-55 24# casing. Set @ 321.0' KB. On 4/15/10 cement with 160 sks of class "G" w/ 2% CaCL2 + 1/4# per sk Cello Flake mixed @ 15.8 ppg with 1.17 cf/sk yield. Returned 3 bbls cement to pit. WOC.

RECEIVED

APR 20 2010

DIV. OF OIL, GAS & MINING

I hereby certify that the foregoing is true and correct (Printed/ Typed) Mitch Benson	Title Drilling Foreman
Signature 	Date 04/15/2010

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office _____	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

Rachel Medina - "Ute Tribal 3-21-4-1" SPUD NOTICE (newfield)

From: "Johnny Davis" <jdavis@newfield.com>
To: <ut_vn_opreport@blm.gov>, "Carol Daniels" <caroldaniels@utah.gov>, <rach...>
Date: 4/12/2010 7:32 AM
Subject: "Ute Tribal 3-21-4-1" SPUD NOTICE (newfield)
CC: "Ray Herrera" <rherrera@newfield.com>, "Ryan Crum" <rcrum@newfield.com>,...

Operator: Newfield Production Company
Well Name: Ute Tribal 3-21-4-1
Rig: Ross #21
Legals: NENW Sec21 T4S R1W
Lease #: 20G0005609
API #: 43-013-50204
Contact: Johnny Davis 823-3612

Est. spud time: 9:00 AM 4/13/10
Est. run 8-5/8" csg: 4:00 PM 4/13/10
Est. cement surface csg:

STATE OF UTAH
 DIVISION OF OIL, GAS AND MINING
 ENTITY ACTION FORM - FORM 6


OPERATOR: NEWFIELD PRODUCTION COMPANY
 ADDRESS: RT. 3 BOX 3630
MYTON, UT 84052

OPERATOR ACCT. NO. N2695

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO. ✓	API NUMBER	WELL NAME	WELL LOCATION				SPUD DATE	EFFECTIVE DATE	
					QQ	SC	TP	RG			COUNTY
B	99999	17400	4301334202	WEST POINT ^{Fed} 13-31-8-16	SWSW	31	8S	16E	DUCHESNE	4/10/2010	4/28/10
WELL 1 COMMENTS: GRRV											
A	99999	17586	4304740498	UTE TRIBAL 8-29-4-1E	SENE	29	4S	1E	UINTAH	4/19/2010	4/28/10
GRRV											
B	99999	17400 ✓	4304740031	SUNDANCE FEDERAL B-12-9-17	NWNE	12	9S	17E	UINTAH	4/17/2010	4/28/10
GRRV BHL = NWNW											
B	99999	17400 ✓	4304740027	SUNDANCE ^{Fed} S-11-9-17	SESE	11	9S	17E	DUCHESNE	4/13/2010	4/28/10
GRRV BHL = NWSE											
A	99999	17587	4301350204	UTE TRIBAL 3-21-4-1	NENW	21	4S	1W	DUCHESNE	4/13/2010	4/28/10
WELL 5 COMMENTS: GRRV											
A	99999	17588	4301334048	UTE TRIBAL 12-30-4-2	NWSW	30	4S	2W	DUCHESNE	4/10/2010	4/28/10
WELL 5 COMMENTS: GRRV											

ACTION CODES (See instructions on back of form)
 A - new entity for new well (single well only)
 B - well to existing entity (group or unit well)
 C - from one existing entity to another existing entity
 D - well from one existing entity to a new entity
 E - other (explain in comments section)

RECEIVED
 APR 22 2010

CONFIDENTIAL
 Signature: 
 Production Clerk
 Date: 04/22/10
 Jentri Park

NOTE: Use COMMENT section to explain why each Action Code was selected.