

STATE OF UTAH
 DEPARTMENT OF NATURAL RESOURCES
 DIVISION OF OIL, GAS AND MINING

FORM 3
 AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL		1. WELL NAME and NUMBER Greater Monument Butte H-34-8-16
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>		3. FIELD OR WILDCAT MONUMENT BUTTE
4. TYPE OF WELL Oil Well <input type="checkbox"/> Coalbed Methane Well: NO <input type="checkbox"/>		5. UNIT or COMMUNITIZATION AGREEMENT NAME GMBU (GRRV)
6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY		7. OPERATOR PHONE 435 646-4825
8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Myton, UT, 84052		9. OPERATOR E-MAIL mcrozier@newfield.com
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UTU-16535	11. MINERAL OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>	
13. NAME OF SURFACE OWNER (if box 12 = 'fee')		12. SURFACE OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')		14. SURFACE OWNER PHONE (if box 12 = 'fee')
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')		16. SURFACE OWNER E-MAIL (if box 12 = 'fee')
18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>		19. SLANT VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>

20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN
LOCATION AT SURFACE	1981 FNL 2021 FEL	SWNE	34	8.0 S	16.0 E	S
Top of Uppermost Producing Zone	1556 FNL 2448 FEL	SWNE	34	8.0 S	16.0 E	S
At Total Depth	1320 FNL 2630 FWL	NENW	34	8.0 S	16.0 E	S

21. COUNTY DUCHESNE	22. DISTANCE TO NEAREST LEASE LINE (Feet) 10	23. NUMBER OF ACRES IN DRILLING UNIT 20
	25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 1330	26. PROPOSED DEPTH MD: 6560 TVD: 6560
27. ELEVATION - GROUND LEVEL 5624	28. BOND NUMBER WYB000493	29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 43-7478

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)	<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)	<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP

NAME Mandie Crozier	TITLE Regulatory Tech	PHONE 435 646-4825
SIGNATURE	DATE 01/21/2010	EMAIL mcrozier@newfield.com
API NUMBER ASSIGNED 43013502250000	APPROVAL  Permit Manager	

Proposed Hole, Casing, and Cement

String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Prod	7.875	5.5	0	6560		
Pipe	Grade	Length	Weight			
	Grade J-55 LT&C	6560	15.5			



Proposed Hole, Casing, and Cement

String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Surf	12.25	8.625	0	300		
Pipe	Grade	Length	Weight			
	Grade J-55 ST&C	300	24.0			


T8S, R16E, S.L.B.&M.

NEWFIELD PRODUCTION COMPANY

WELL LOCATION, H-34-8-16, LOCATED AS SHOWN IN THE SW 1/4 NE 1/4 OF SECTION 34, T8S, R16E, S.L.B.&M. DUCHESNE COUNTY, UTAH.

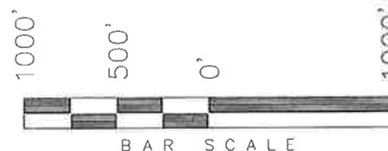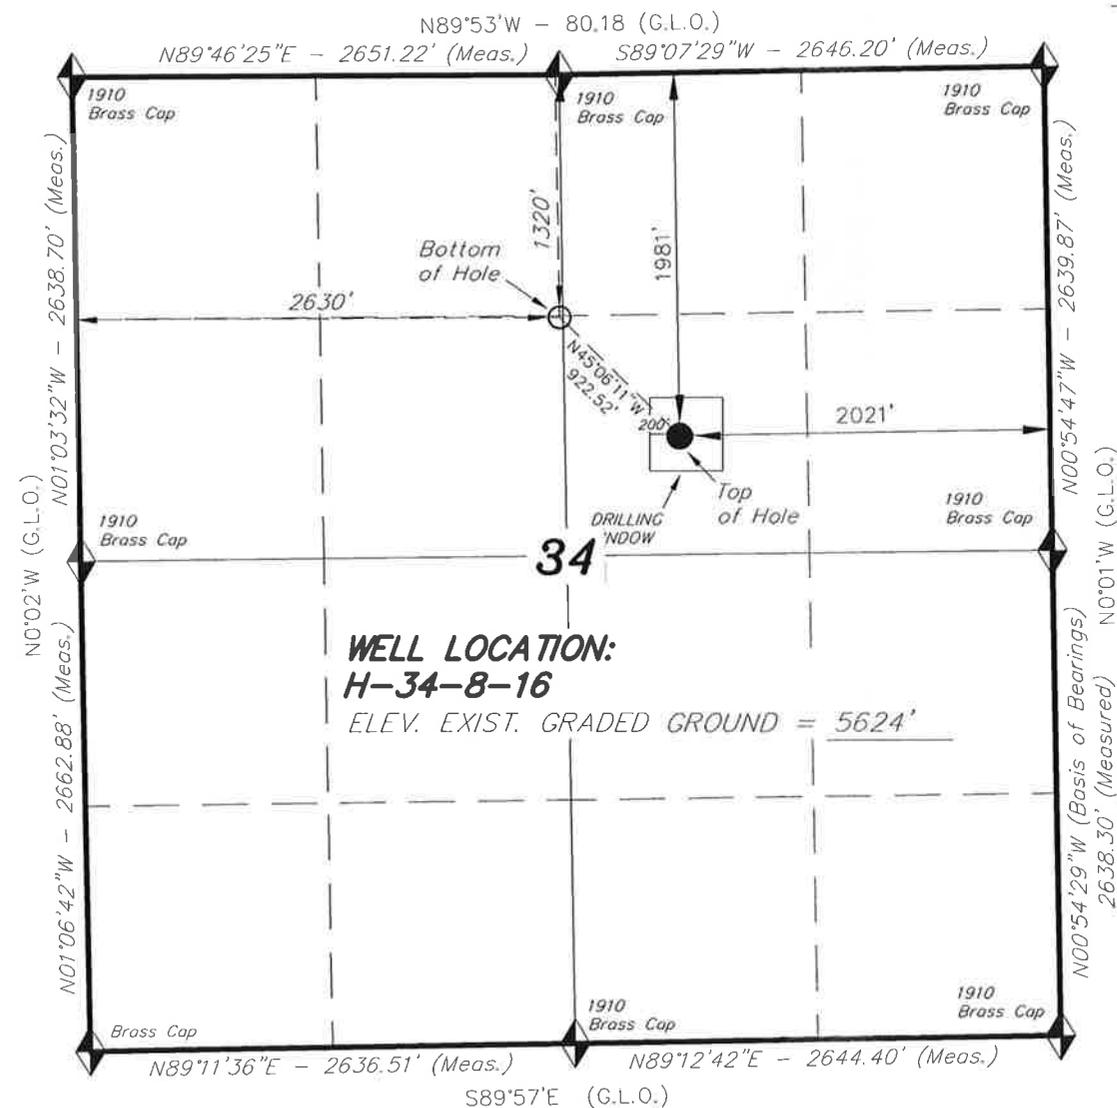

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACCURATE SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. 189377

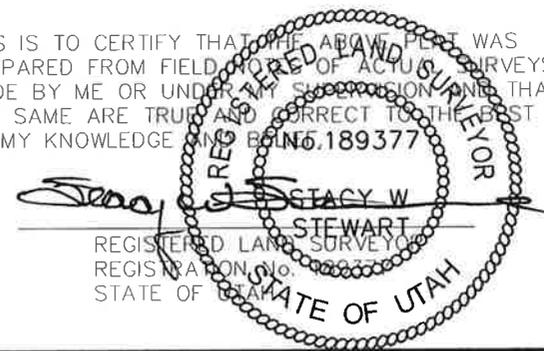

TRI STATE LAND SURVEYING & CONSULTING
 180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
 (435) 781-2501

DATE SURVEYED: 8-7-09	SURVEYED BY: T.H.
DATE DRAWN: 8-11-09	DRAWN BY: M.W.
REVISED: 1-15-10 - M.W.	SCALE: 1" = 1000'

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV; Elevations are base on LOCATION: an N.G.S. OPUS Correction, LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

H-34-8-16
 (Surface Location) NAD 83
 LATITUDE = 40° 04' 34.34"
 LONGITUDE = 110° 06' 11.94"





Project: USGS Myton SW (UT)
 Site: SECTION 34 T8S, R16E
 Well: H-34-8-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.51°

Magnetic Field
 Strength: 52460.2snT
 Dip Angle: 65.86°
 Date: 12/15/2009
 Model: IGRF200510

KOP @ 600'
 DOGLEG RATE 1.5 DEG/100'
 TARGET RADIUS IS 75'

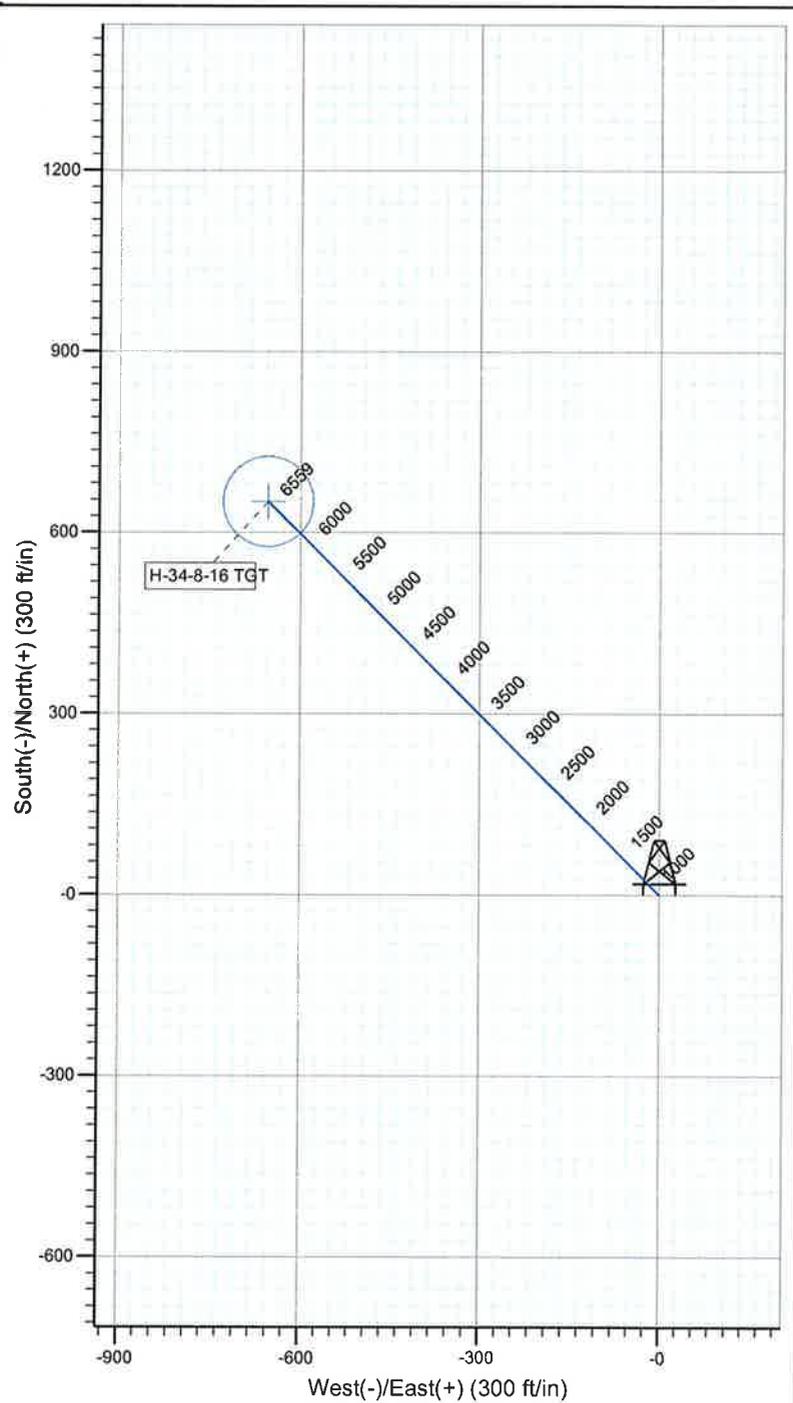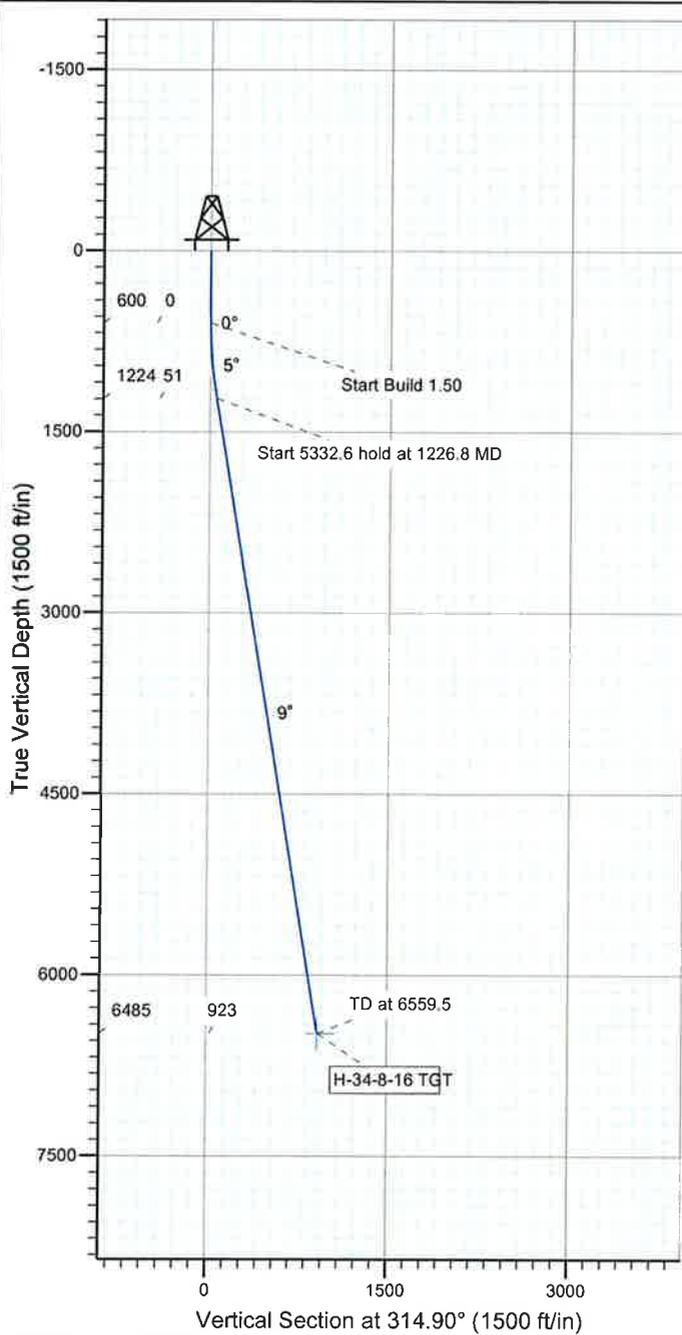

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
H-34-8-16 TGT	6485.0	651.2	-653.5	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1226.8	9.40	314.90	1224.0	36.2	-36.4	1.50	314.90	51.3	
4	6559.5	9.40	314.90	6485.0	651.2	-653.5	0.00	0.00	922.5	H-34-8-16 TGT

NEWFIELD



NEWFIELD EXPLORATION

**USGS Myton SW (UT)
SECTION 34 T8S, R16E
H-34-8-16**

Wellbore #1

Plan: Design #1

Standard Planning Report

15 December, 2009



HATHAWAYBURNHAM

Planning Report

Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well H-34-8-16
Company:	NEWFIELD EXPLORATION	TVD Reference:	WELL @ 5636.0ft (Original Well Elev)
Project:	USGS Myton SW (UT)	MD Reference:	WELL @ 5636.0ft (Original Well Elev)
Site:	SECTION 34 T8S, R16E	North Reference:	True
Well:	H-34-8-16	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		Using geodetic scale factor

Site	SECTION 34 T8S, R16E, SEC 34 T8S, R16E				
Site Position:		Northing:	7,199,000.00ft	Latitude:	40° 4' 29.106 N
From:	Lat/Long	Easting:	2,031,000.00ft	Longitude:	110° 6' 14.985 W
Position Uncertainty:	0.0 ft	Slot Radius:	"	Grid Convergence:	0.89 °

Well	H-34-8-16, SHL LAT 40 04 34.34, LONG -110 06 11.94					
Well Position	+N/-S	529.6 ft	Northing:	7,199,533.20 ft	Latitude:	40° 4' 34.340 N
	+E/-W	236.7 ft	Easting:	2,031,228.37 ft	Longitude:	110° 6' 11.940 W
Position Uncertainty		0.0 ft	Wellhead Elevation:	5,636.0 ft	Ground Level:	5,624.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	12/15/2009	11.51	65.86	52,460

Design	Design #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	6,485.0	0.0	0.0	314.90

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,226.8	9.40	314.90	1,224.0	36.2	-36.4	1.50	1.50	0.00	314.90	
6,559.5	9.40	314.90	6,485.0	651.2	-653.5	0.00	0.00	0.00	0.00	H-34-8-16 TGT

NEWFIELD



HATHAWAYBURNHAM

Planning Report

Database: EDM 2003.21 Single User Db
Company: NEWFIELD EXPLORATION
Project: USGS Myton SW (UT)
Site: SECTION 34 T8S, R16E
Well: H-34-8-16
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well H-34-8-16
TVD Reference: WELL @ 5636.0ft (Original Well Elev)
MD Reference: WELL @ 5636.0ft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	1.50	314.90	700.0	0.9	-0.9	1.3	1.50	1.50	0.00
800.0	3.00	314.90	799.9	3.7	-3.7	5.2	1.50	1.50	0.00
900.0	4.50	314.90	899.7	8.3	-8.3	11.8	1.50	1.50	0.00
1,000.0	6.00	314.90	999.3	14.8	-14.8	20.9	1.50	1.50	0.00
1,100.0	7.50	314.90	1,098.6	23.1	-23.1	32.7	1.50	1.50	0.00
1,200.0	9.00	314.90	1,197.5	33.2	-33.3	47.0	1.50	1.50	0.00
1,226.8	9.40	314.90	1,224.0	36.2	-36.4	51.3	1.50	1.50	0.00
1,300.0	9.40	314.90	1,296.2	44.7	-44.8	63.3	0.00	0.00	0.00
1,400.0	9.40	314.90	1,394.9	56.2	-56.4	79.6	0.00	0.00	0.00
1,500.0	9.40	314.90	1,493.5	67.7	-68.0	95.9	0.00	0.00	0.00
1,600.0	9.40	314.90	1,592.2	79.3	-79.5	112.3	0.00	0.00	0.00
1,700.0	9.40	314.90	1,690.8	90.8	-91.1	128.6	0.00	0.00	0.00
1,800.0	9.40	314.90	1,789.5	102.3	-102.7	145.0	0.00	0.00	0.00
1,900.0	9.40	314.90	1,888.1	113.9	-114.3	161.3	0.00	0.00	0.00
2,000.0	9.40	314.90	1,986.8	125.4	-125.8	177.6	0.00	0.00	0.00
2,100.0	9.40	314.90	2,085.5	136.9	-137.4	194.0	0.00	0.00	0.00
2,200.0	9.40	314.90	2,184.1	148.4	-149.0	210.3	0.00	0.00	0.00
2,300.0	9.40	314.90	2,282.8	160.0	-160.5	226.6	0.00	0.00	0.00
2,400.0	9.40	314.90	2,381.4	171.5	-172.1	243.0	0.00	0.00	0.00
2,500.0	9.40	314.90	2,480.1	183.0	-183.7	259.3	0.00	0.00	0.00
2,600.0	9.40	314.90	2,578.7	194.6	-195.3	275.7	0.00	0.00	0.00
2,700.0	9.40	314.90	2,677.4	206.1	-206.8	292.0	0.00	0.00	0.00
2,800.0	9.40	314.90	2,776.1	217.6	-218.4	308.3	0.00	0.00	0.00
2,900.0	9.40	314.90	2,874.7	229.2	-230.0	324.7	0.00	0.00	0.00
3,000.0	9.40	314.90	2,973.4	240.7	-241.5	341.0	0.00	0.00	0.00
3,100.0	9.40	314.90	3,072.0	252.2	-253.1	357.3	0.00	0.00	0.00
3,200.0	9.40	314.90	3,170.7	263.8	-264.7	373.7	0.00	0.00	0.00
3,300.0	9.40	314.90	3,269.3	275.3	-276.3	390.0	0.00	0.00	0.00
3,400.0	9.40	314.90	3,368.0	286.8	-287.8	406.4	0.00	0.00	0.00
3,500.0	9.40	314.90	3,466.6	298.4	-299.4	422.7	0.00	0.00	0.00
3,600.0	9.40	314.90	3,565.3	309.9	-311.0	439.0	0.00	0.00	0.00
3,700.0	9.40	314.90	3,664.0	321.4	-322.6	455.4	0.00	0.00	0.00
3,800.0	9.40	314.90	3,762.6	333.0	-334.1	471.7	0.00	0.00	0.00
3,900.0	9.40	314.90	3,861.3	344.5	-345.7	488.0	0.00	0.00	0.00
4,000.0	9.40	314.90	3,959.9	356.0	-357.3	504.4	0.00	0.00	0.00
4,100.0	9.40	314.90	4,058.6	367.6	-368.8	520.7	0.00	0.00	0.00
4,200.0	9.40	314.90	4,157.2	379.1	-380.4	537.1	0.00	0.00	0.00
4,300.0	9.40	314.90	4,255.9	390.6	-392.0	553.4	0.00	0.00	0.00
4,400.0	9.40	314.90	4,354.6	402.2	-403.6	569.7	0.00	0.00	0.00
4,500.0	9.40	314.90	4,453.2	413.7	-415.1	586.1	0.00	0.00	0.00
4,600.0	9.40	314.90	4,551.9	425.2	-426.7	602.4	0.00	0.00	0.00
4,700.0	9.40	314.90	4,650.5	436.7	-438.3	618.7	0.00	0.00	0.00
4,800.0	9.40	314.90	4,749.2	448.3	-449.8	635.1	0.00	0.00	0.00
4,900.0	9.40	314.90	4,847.8	459.8	-461.4	651.4	0.00	0.00	0.00
5,000.0	9.40	314.90	4,946.5	471.3	-473.0	667.7	0.00	0.00	0.00
5,100.0	9.40	314.90	5,045.2	482.9	-484.6	684.1	0.00	0.00	0.00
5,200.0	9.40	314.90	5,143.8	494.4	-496.1	700.4	0.00	0.00	0.00



HATHAWAYBURNHAM

Planning Report

Database: EDM 2003.21 Single User Db
Company: NEWFIELD EXPLORATION
Project: USGS Myton SW (UT)
Site: SECTION 34 T8S, R16E
Well: H-34-8-16
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well H-34-8-16
TVD Reference: WELL @ 5636.0ft (Original Well Elev)
MD Reference: WELL @ 5636.0ft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,300.0	9.40	314.90	5,242.5	505.9	-507.7	716.8	0.00	0.00	0.00
5,400.0	9.40	314.90	5,341.1	517.5	-519.3	733.1	0.00	0.00	0.00
5,500.0	9.40	314.90	5,439.8	529.0	-530.9	749.4	0.00	0.00	0.00
5,600.0	9.40	314.90	5,538.4	540.5	-542.4	765.8	0.00	0.00	0.00
5,700.0	9.40	314.90	5,637.1	552.1	-554.0	782.1	0.00	0.00	0.00
5,800.0	9.40	314.90	5,735.7	563.6	-565.6	798.4	0.00	0.00	0.00
5,900.0	9.40	314.90	5,834.4	575.1	-577.1	814.8	0.00	0.00	0.00
6,000.0	9.40	314.90	5,933.1	586.7	-588.7	831.1	0.00	0.00	0.00
6,100.0	9.40	314.90	6,031.7	598.2	-600.3	847.5	0.00	0.00	0.00
6,200.0	9.40	314.90	6,130.4	609.7	-611.9	863.8	0.00	0.00	0.00
6,300.0	9.40	314.90	6,229.0	621.3	-623.4	880.1	0.00	0.00	0.00
6,400.0	9.40	314.90	6,327.7	632.8	-635.0	896.5	0.00	0.00	0.00
6,500.0	9.40	314.90	6,426.3	644.3	-646.6	912.8	0.00	0.00	0.00
6,559.5	9.40	314.90	6,485.0	651.2	-653.5	922.5	0.00	0.00	0.00

Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude
H-34-8-16 TGT - hit/miss target - Shape	0.00	0.00	6,485.0	651.2	-653.5	7,200,174.03	2,030,564.89	40° 4' 40.775 N	110° 6' 20.346 W
- plan hits target - Circle (radius 75.0)									

NEWFIELD PRODUCTION COMPANY
GREATER MONUMENT BUTTE H-34-16
AT SURFACE: SW/NE SECTION 34, T8S, R16E
DUCHESNE COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0 – 1775'
Green River	1775'
Wasatch	6560'

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation 1775' – 6560' – Oil

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO ₃) (mg/l)
Dissolved Bicarbonate (NaHCO ₃) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO ₄) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. **Casing Design: Greater Monument Butte C-34-8-16**

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	300'	24.0	J-55	STC	2,950	1,370	244,000
						17.53	14.35	33.89
Prod casing 5-1/2"	0'	6,560'	15.5	J-55	LTC	4,810	4,040	217,000
						2.30	1.94	2.13

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg
 Pore pressure at surface casing shoe = 8.33 ppg
 Pore pressure at prod casing shoe = 8.33 ppg
 Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. **Cementing Design: Greater Monument Butte C-34-8-16**

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft ³ /sk)
			ft ³			
Surface casing	300'	Class G w/ 2% CaCl	138	30%	15.8	1.17
			161			
Prod casing Lead	4,560'	Prem Lite II w/ 10% gel + 3% KCl	315	30%	11.0	3.26
			1027			
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363	30%	14.3	1.24
			451			

- *Actual volume pumped will be 15% over the caliper log
- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
 - Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ±350 feet will be drilled with an air/mist system. The air rig is equipped with a 6 ½" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ±350 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated

bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the second quarter of 2010, and take approximately seven (7) days from spud to rig release.

2-M SYSTEM

Blowout Prevention Equipment Systems


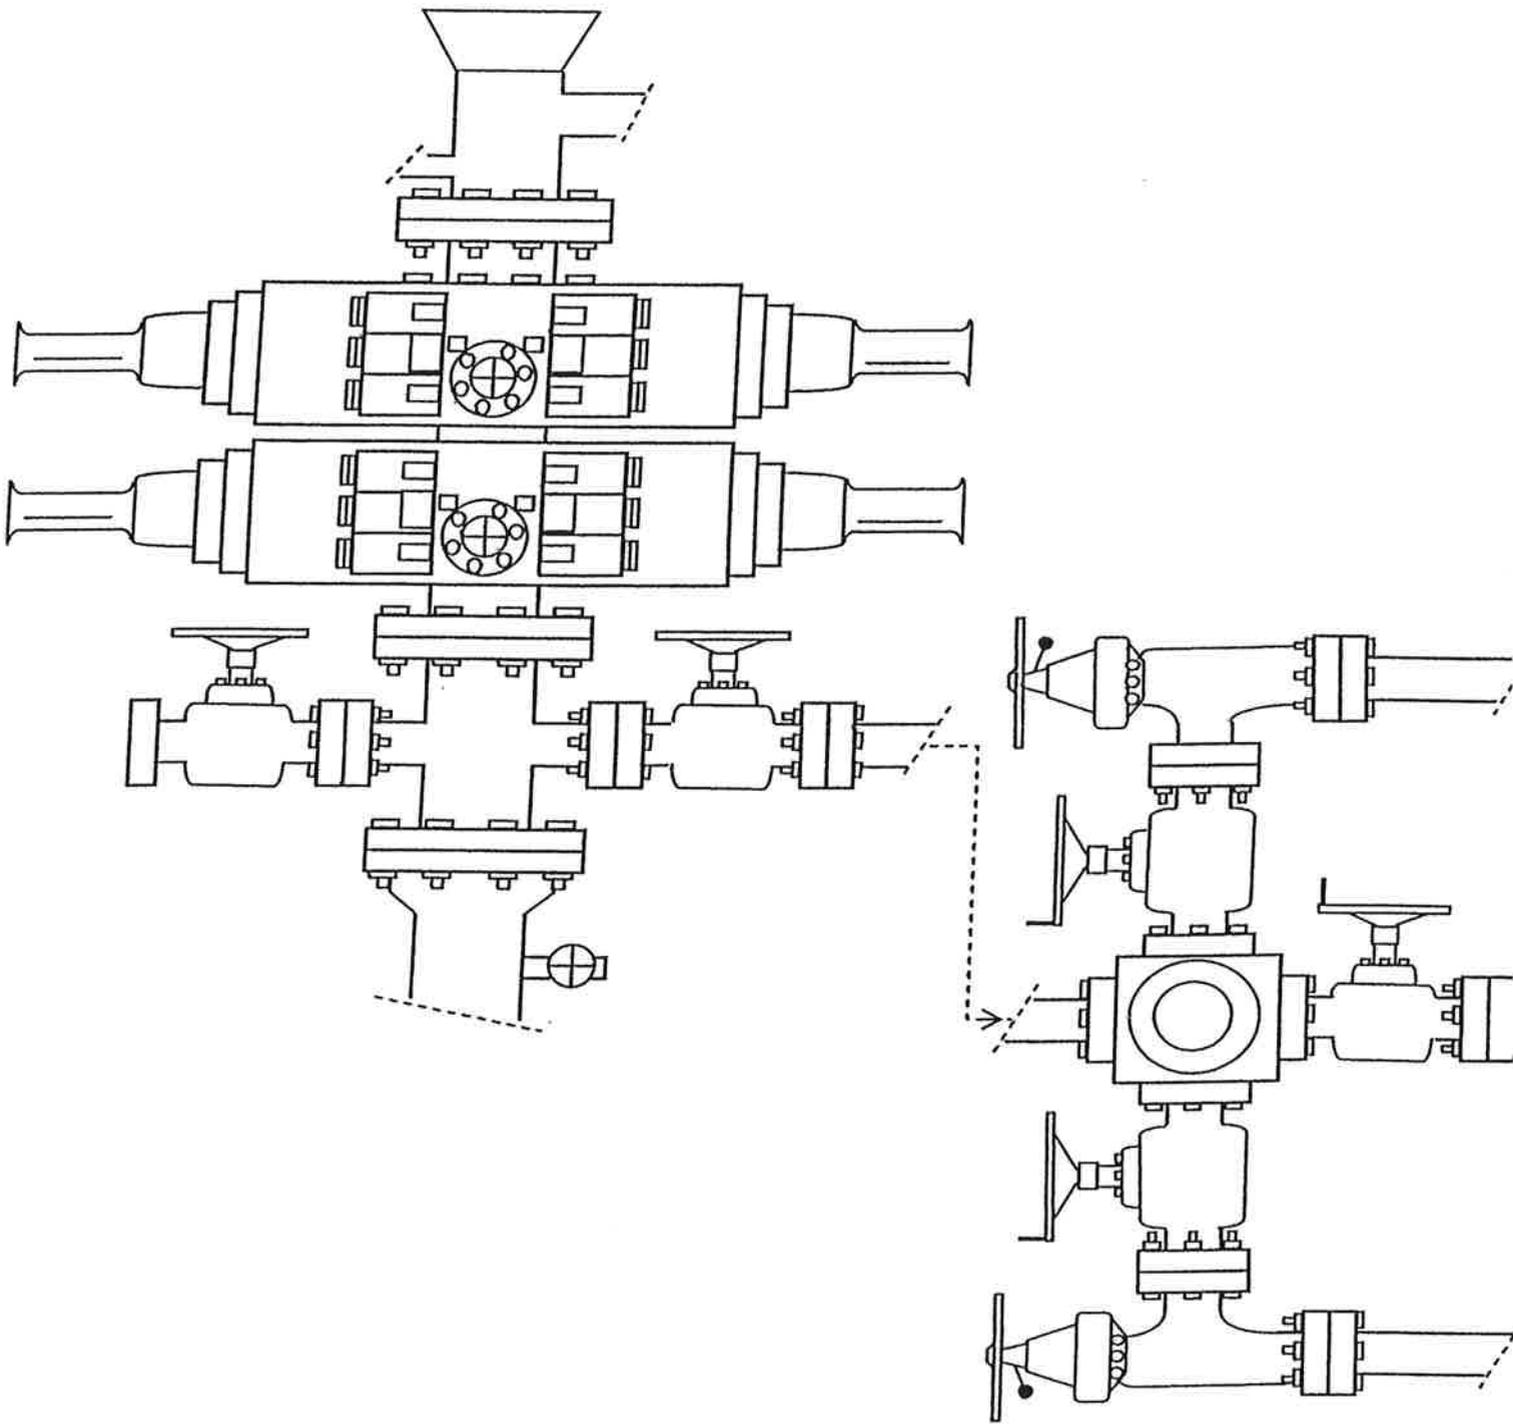


EXHIBIT C

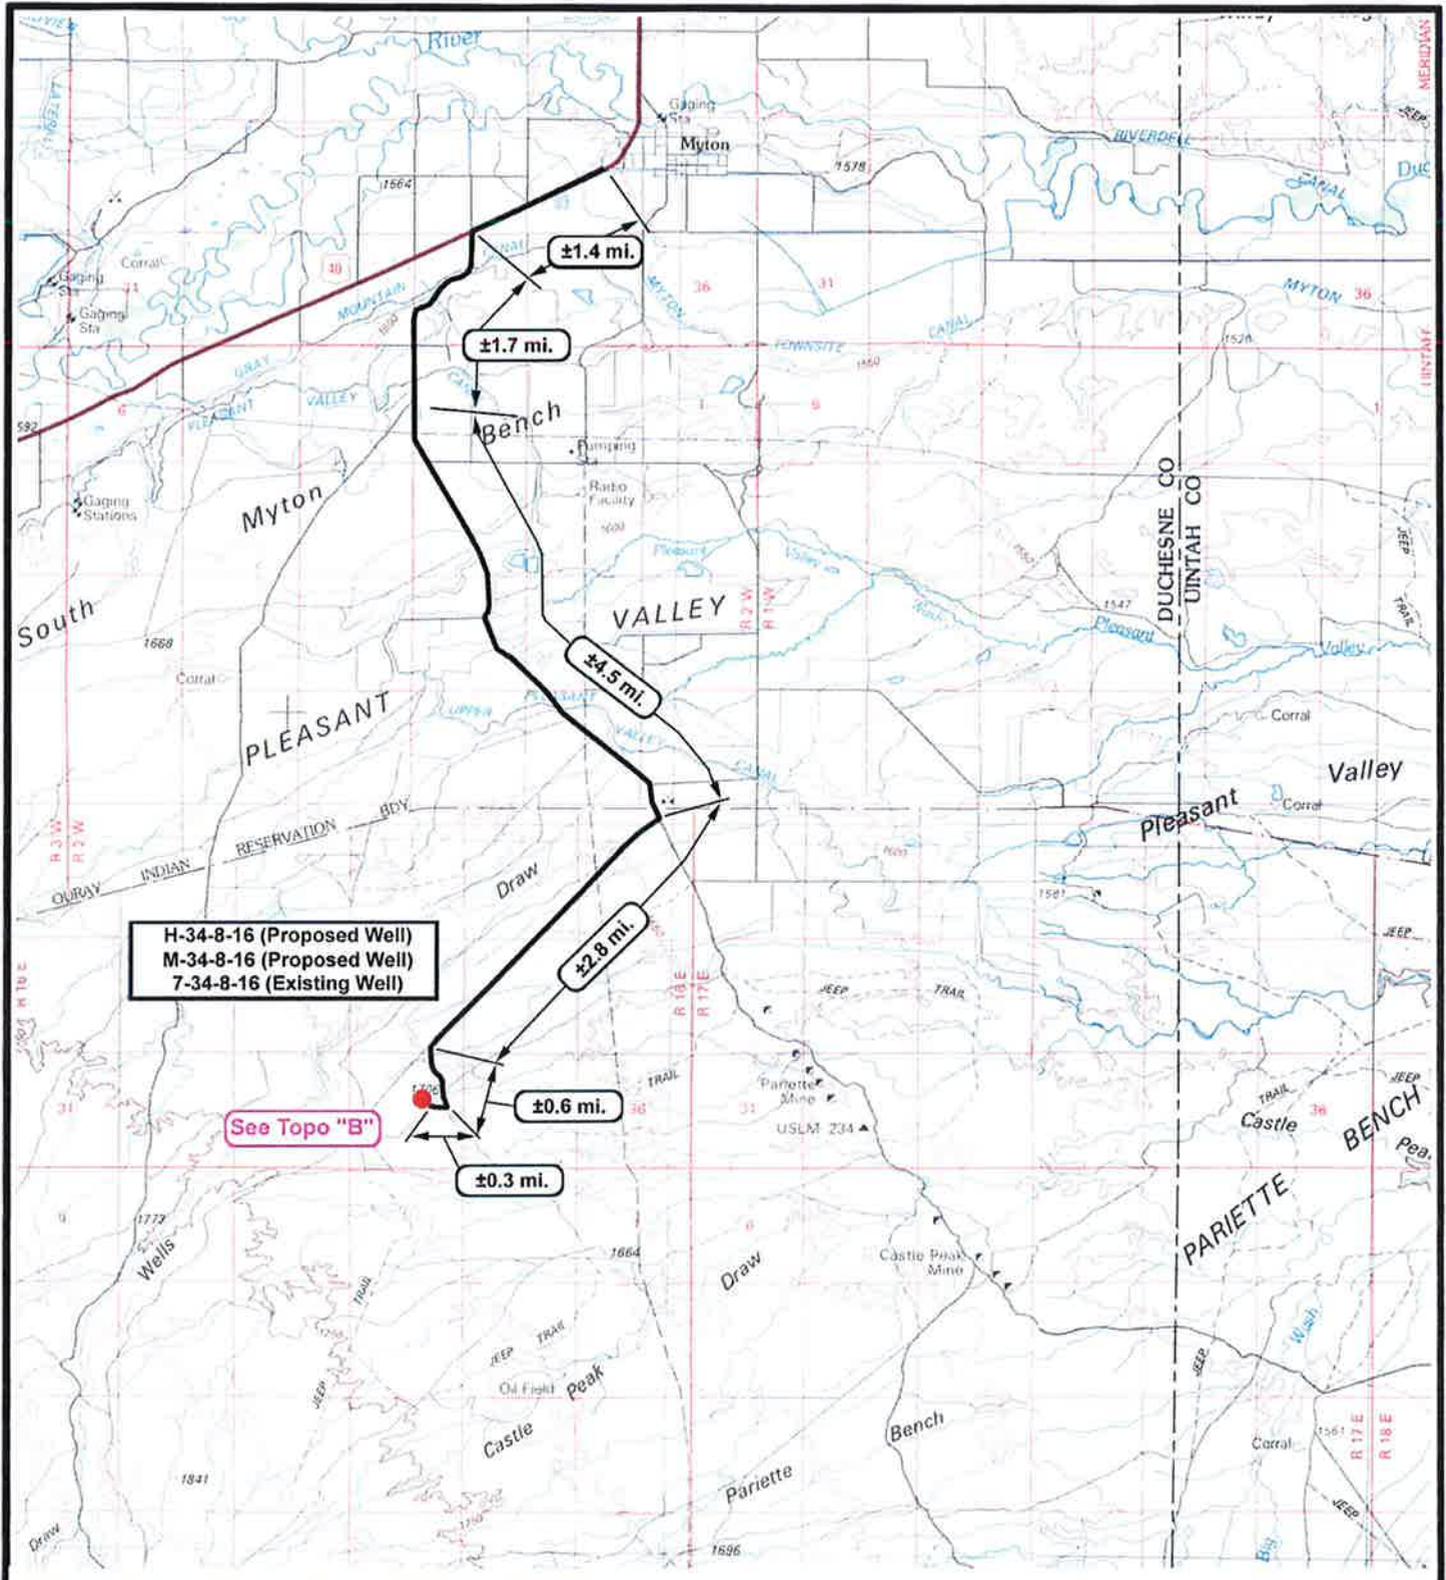

H-34-8-16 (Proposed Well)
 M-34-8-16 (Proposed Well)
 7-34-8-16 (Existing Well)

See Topo "B"

±1.4 mi.

±1.7 mi.

±4.5 mi.

±2.8 mi.

±0.6 mi.

±0.3 mi.

NEWFIELD
 Exploration Company

H-34-8-16 (Proposed Well)
 M-34-8-16 (Proposed Well)
 7-34-8-16 (Existing Well)
 Pad Location: SWNE SEC. 34, T8S, R16E, S.L.B.&M.



Tri-State
 Land Surveying Inc.
 (435) 781-2501
 180 North Vernal Ave. Vernal, Utah 84078


SCALE: 1 = 100,000
 DRAWN BY: mw
 DATE: 01-15-2010

Legend

Existing Road

TOPOGRAPHIC MAP

"A"

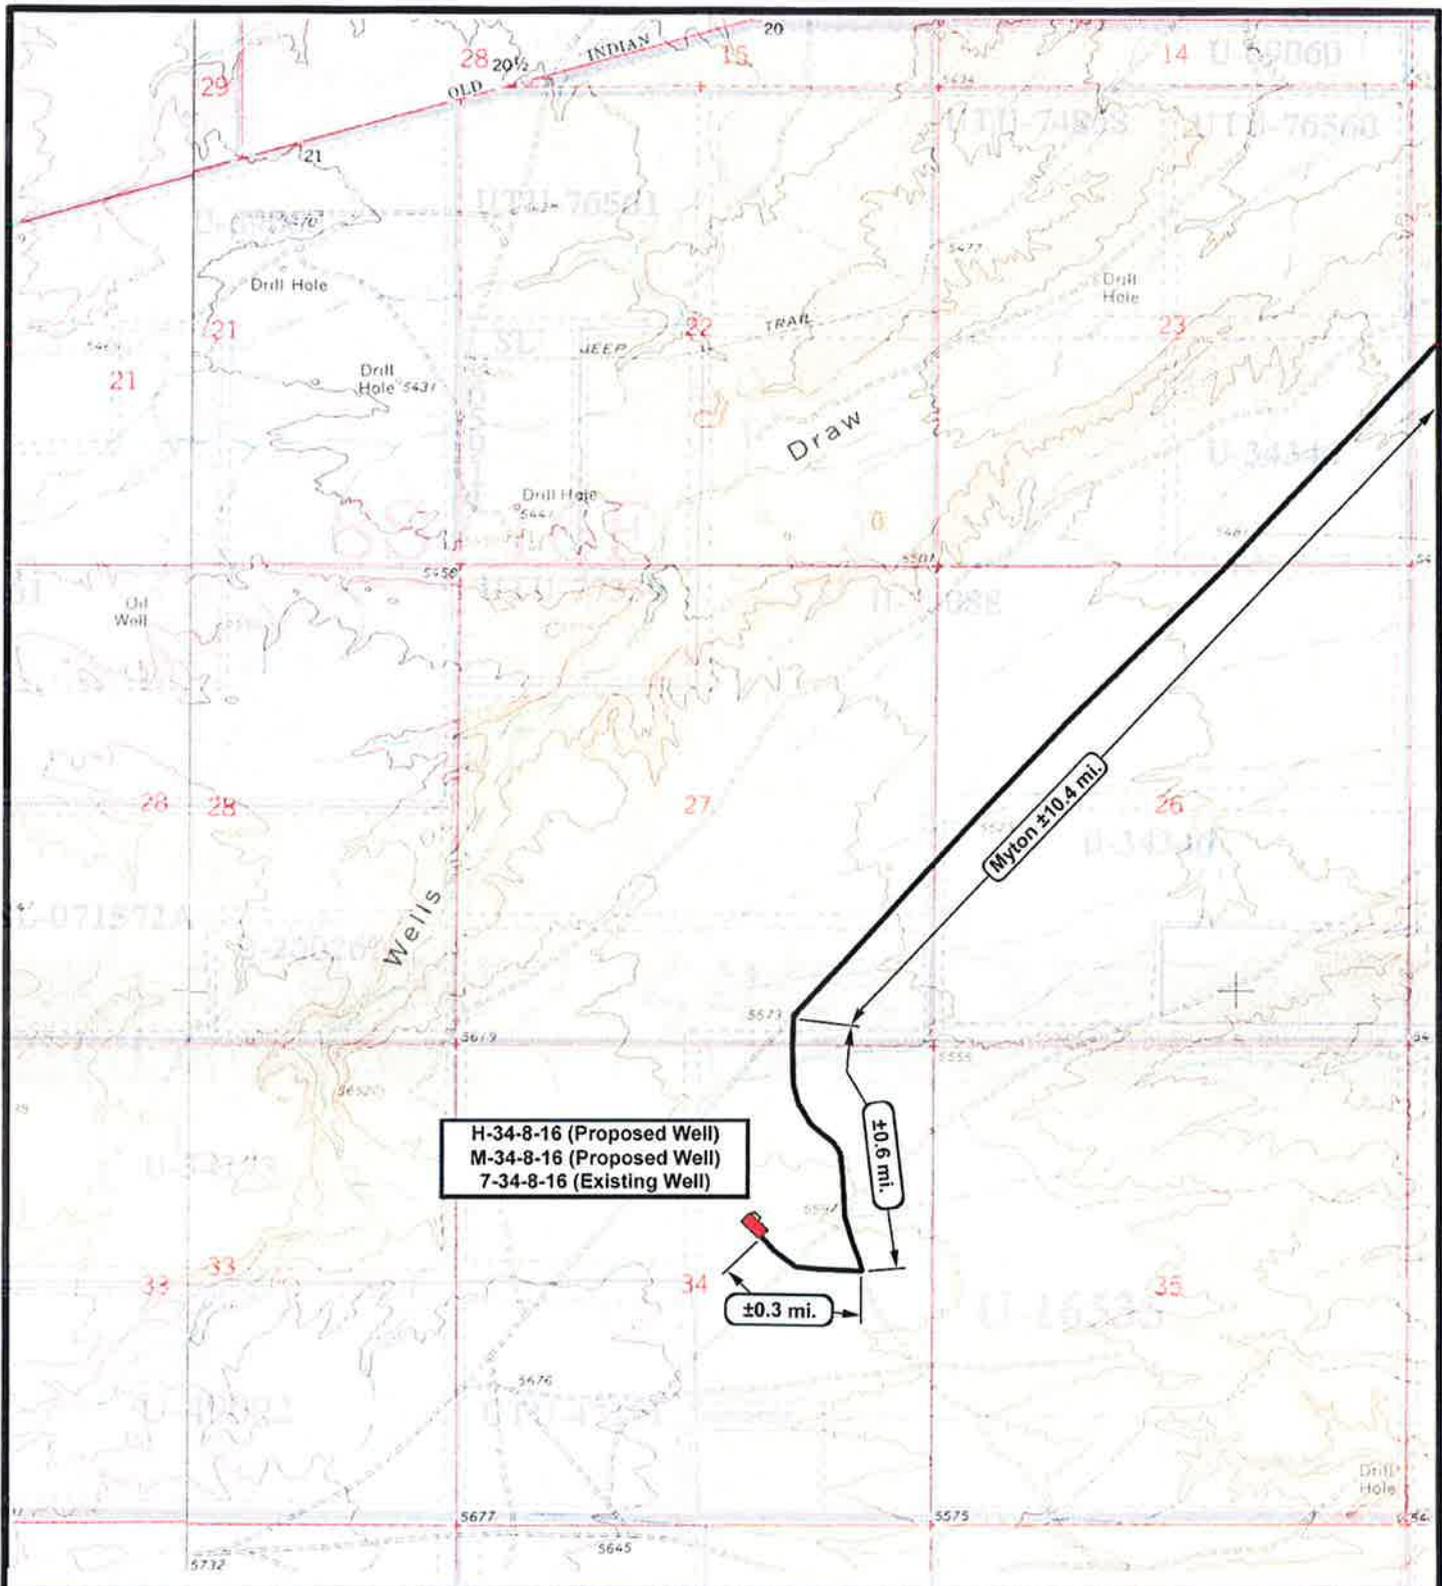

H-34-8-16 (Proposed Well)
M-34-8-16 (Proposed Well)
7-34-8-16 (Existing Well)

Myton ±10.4 mi.

±0.6 mi.

±0.3 mi.



NEWFIELD
Exploration Company

H-34-8-16 (Proposed Well)
M-34-8-16 (Proposed Well)
7-34-8-16 (Existing Well)
Pad Location: SWNE SEC. 34, T8S, R16E, S.L.B.&M.




Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078


SCALE: 1" = 2,000'
DRAWN BY: mw
DATE: 01-15-2010

Legend

Existing Road

TOPOGRAPHIC MAP

"B"

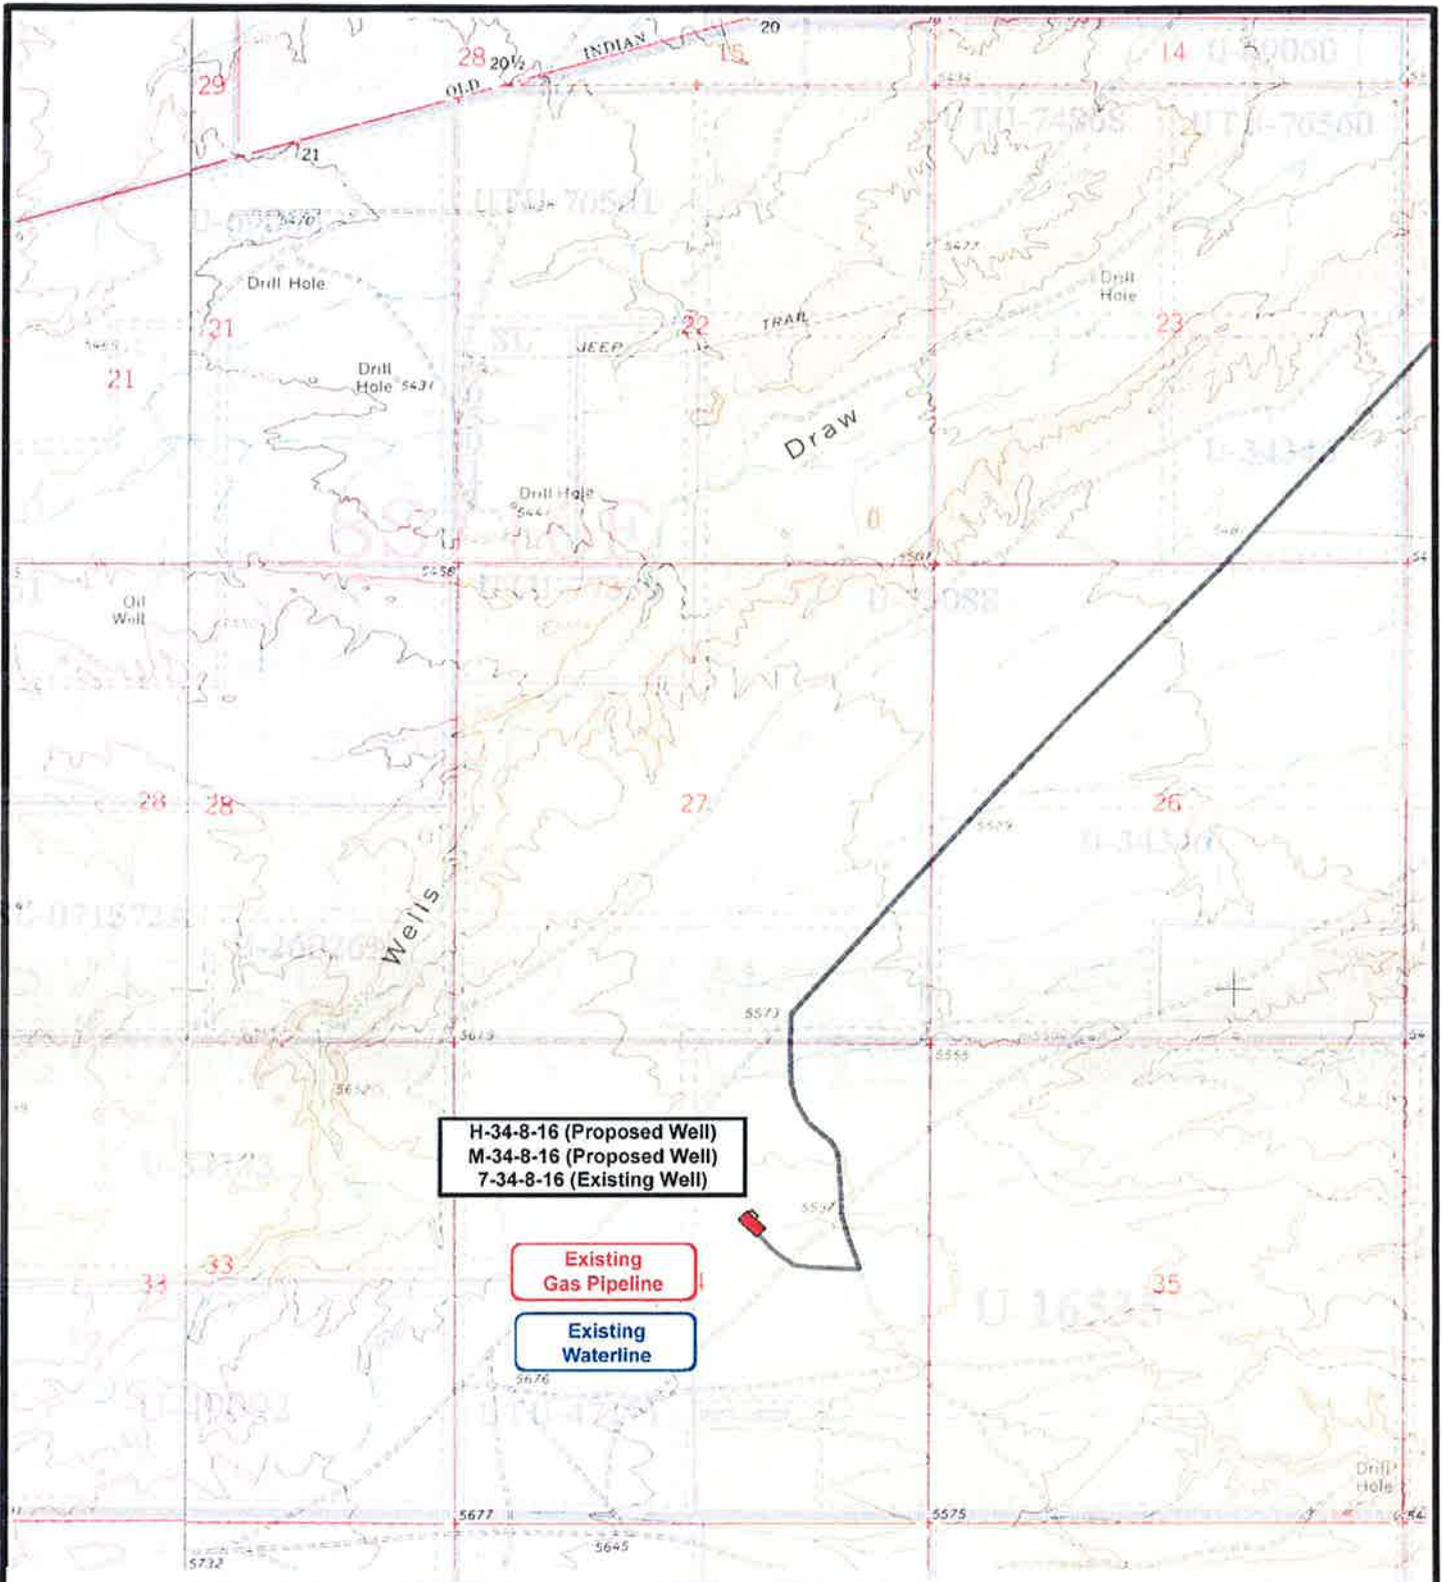

H-34-8-16 (Proposed Well)
 M-34-8-16 (Proposed Well)
 7-34-8-16 (Existing Well)

Existing Gas Pipeline

Existing Waterline

NEWFIELD
 Exploration Company

H-34-8-16 (Proposed Well)
 M-34-8-16 (Proposed Well)
 7-34-8-16 (Existing Well)
 Pad Location: SWNE SEC. 34, T8S, R16E, S.L.B.&M.




Tri-State
 Land Surveying Inc.
 (435) 781-2501
 180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'
 DRAWN BY: mw
 DATE: 01-15-2010

Legend

- Roads
- Proposed Gas Line
- Proposed Water Line

TOPOGRAPHIC MAP
"C"

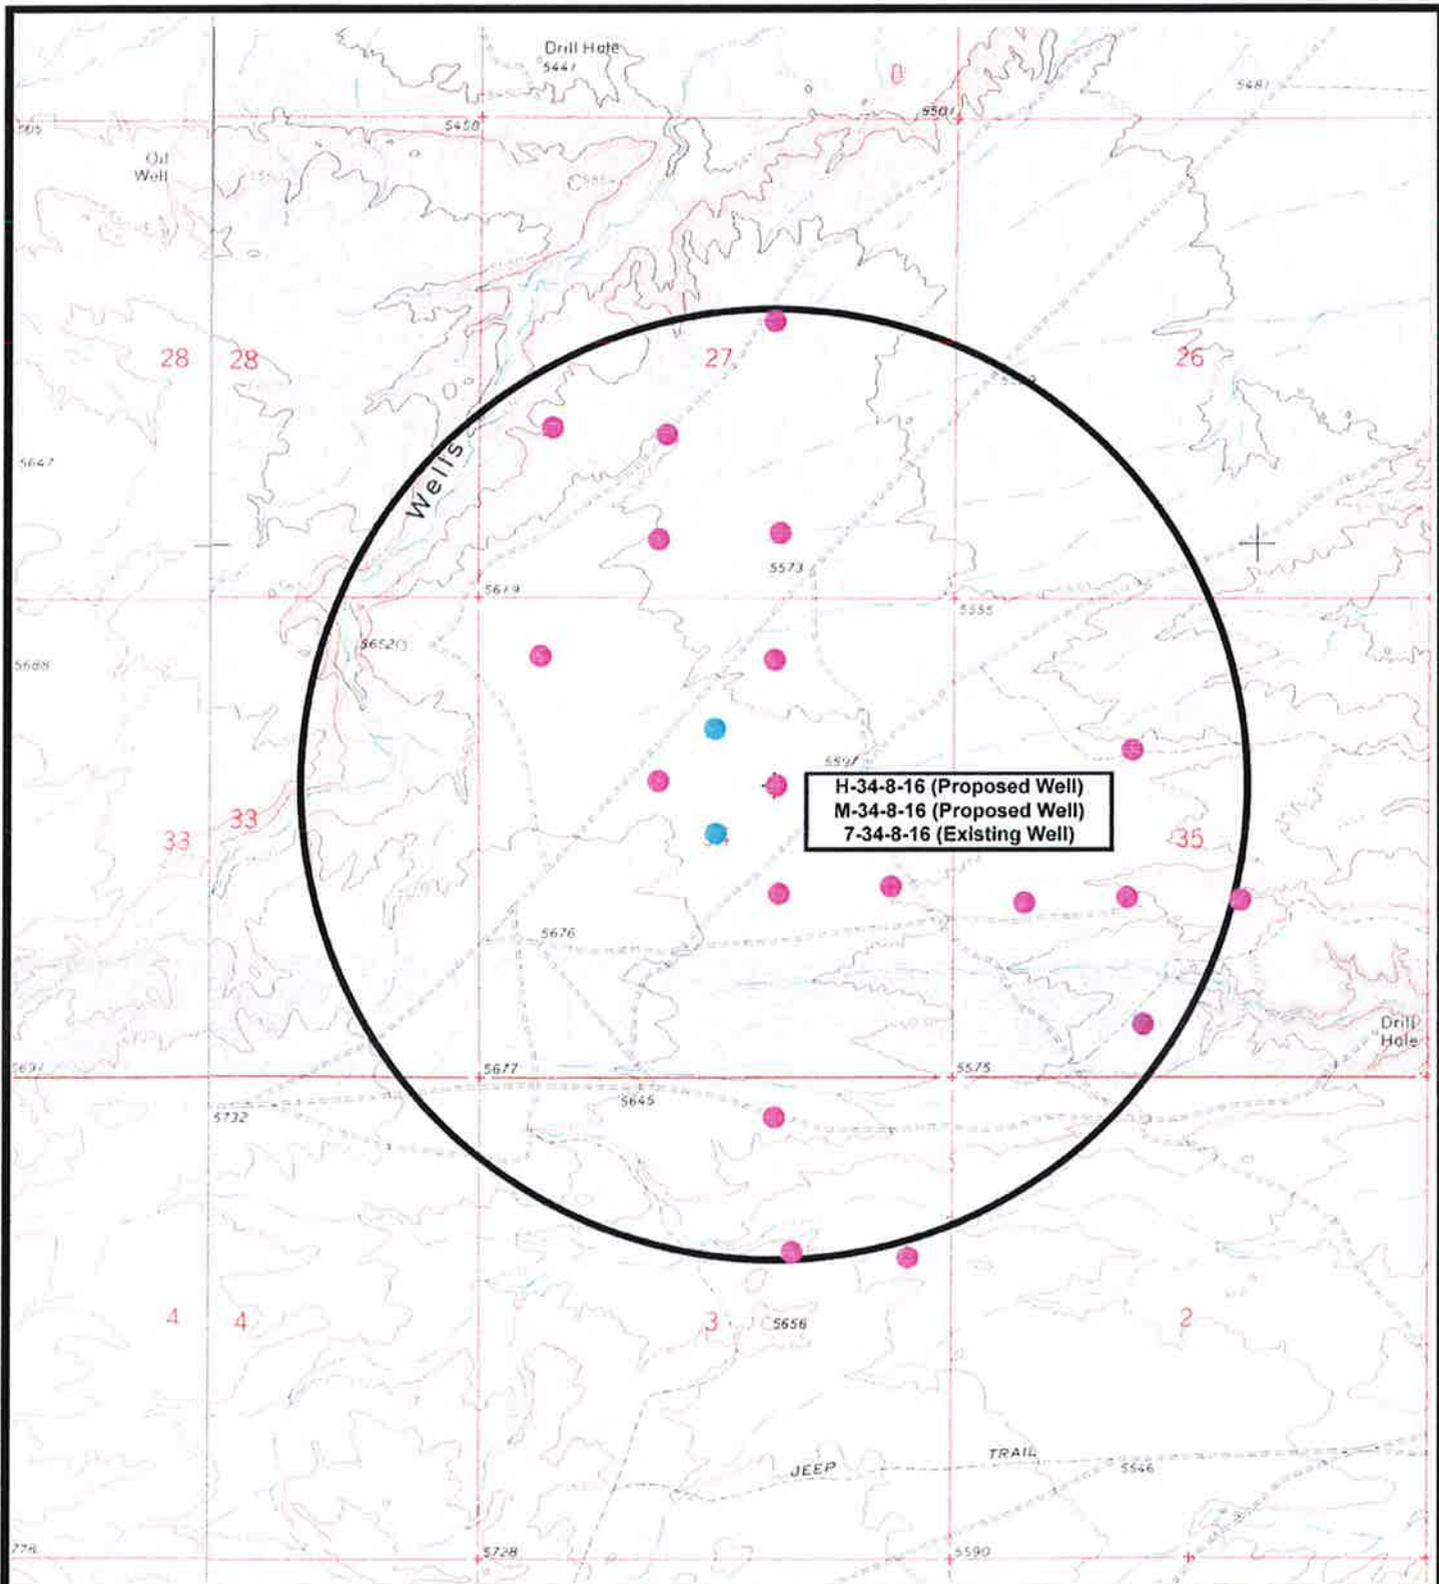

H-34-8-16 (Proposed Well)
M-34-8-16 (Proposed Well)
7-34-8-16 (Existing Well)



NEWFIELD
Exploration Company

H-34-8-16 (Proposed Well)
M-34-8-16 (Proposed Well)
7-34-8-16 (Existing Well)
Pad Location: SWNE SEC. 34, T8S, R16E, S.L.B.&M.




Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2000'
DRAWN BY: mw
DATE: 01-15-2010

Legend

- Pad Location
- Bottom Hole Location
- One-Mile Radius

Exhibit "B"

**NEWFIELD PRODUCTION COMPANY
GREATER MONUMENT BUTTE H-34-8-16
AT SURFACE: SW/NE SECTION 34, T8S, R16E
DUCHESNE COUNTY, UTAH**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site Greater Monument Butte H-34-8-16 located in the SW 1/4 NE 1/4 Section 34, T8S, R16E, Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.4 miles \pm to the junction of this highway and UT State Hwy 53; proceed southeasterly - 6.2 miles \pm to it's junction with an existing dirt road to the southwest; proceed southwesterly - 2.8 miles \pm to it's junction with an existing road to the southeast; proceed southeasterly - 0.6 miles \pm to it's junction with an existing road to the northwest; proceed northwesterly - 0.3 miles \pm to it's junction with the access road to the existing 7-34-8-16 well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

There is no proposed access road for this location. The proposed well will be drilled off of the existing 7-34-8-16 well pad. See attached **Topographic Map "B"**.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

There are no existing facilities that will be used by this well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. LOCATION AND TYPE OF WATER SUPPLY

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District
Water Right : 43-7478

Neil Moon Pond
Water Right: 43-11787

Maurice Harvey Pond
Water Right: 47-1358

Newfield Collector Well
Water Right: 41-3530 (A30414DV, contracted with the Duchesne County Conservancy District).

Please refer to the Monument Butte Field SOP. See Exhibit "A".

6. SOURCE OF CONSTRUCTION MATERIALS

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. METHODS FOR HANDLING WASTE DISPOSAL

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), State of Utah approved surface disposal facilities, or Federally approved surface disposal facilities.

8. **ANCILLARY FACILITIES**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT**

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

- a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP** – Bureau of Land Management.

12. **OTHER ADDITIONAL INFORMATION**

Newfield Production Company is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, Newfield is to immediately stop work that might further disturb such materials and contact the Authorized Officer.

- a) Newfield Production will control noxious weeds along rights-of-way for roads, pipelines, well sites or other applicable facilities. On State administered land it is required that a Pesticide Use Proposal shall be submitted and given approval prior to the application of herbicides or other possible hazardous chemicals.
- b) Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on State Lands after the conclusion of drilling operations or at any other time without State authorization. However, if State authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. MOAC Report #09-158, 9/23/09. Paleontological Resource Survey prepared by, Wade E. Miller, 10/1/09. See attached report cover pages, Exhibit "D".

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the Greater Monument Butte H-34-8-16, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the Greater Monument Butte H-34-8-16, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

The State office shall be notified upon site completion prior to moving on the drilling rig.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative


Name: Tim Eaton
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification

Please be advised that Newfield Production Company is considered to be the operator of well #H-34-8-16, Duchesne County, Utah and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #WYB000493.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

1/21/10
Date


Mandie Crozier
Regulatory Specialist
Newfield Production Company

NEWFIELD PRODUCTION COMPANY

WELL PAD INTERFERENCE PLAT

H-34-8-16 (Proposed Well)

M-34-8-16 (Proposed Well)

7-34-8-16 (Existing Well)

Pad Location: SWNE Section 34, T8S, R16E, S.L.B.&M.

TOP HOLE FOOTAGES


H-34-8-16 (PROPOSED)
1981' FNL & 2021' FEL

M-34-8-16 (PROPOSED)
1980' FNL & 2000' FEL

BOTTOM HOLE FOOTAGES

H-34-8-16 (PROPOSED)
1320' FNL & 2630' FWL

M-34-8-16 (PROPOSED)
2630' FSL & 2630' FWL

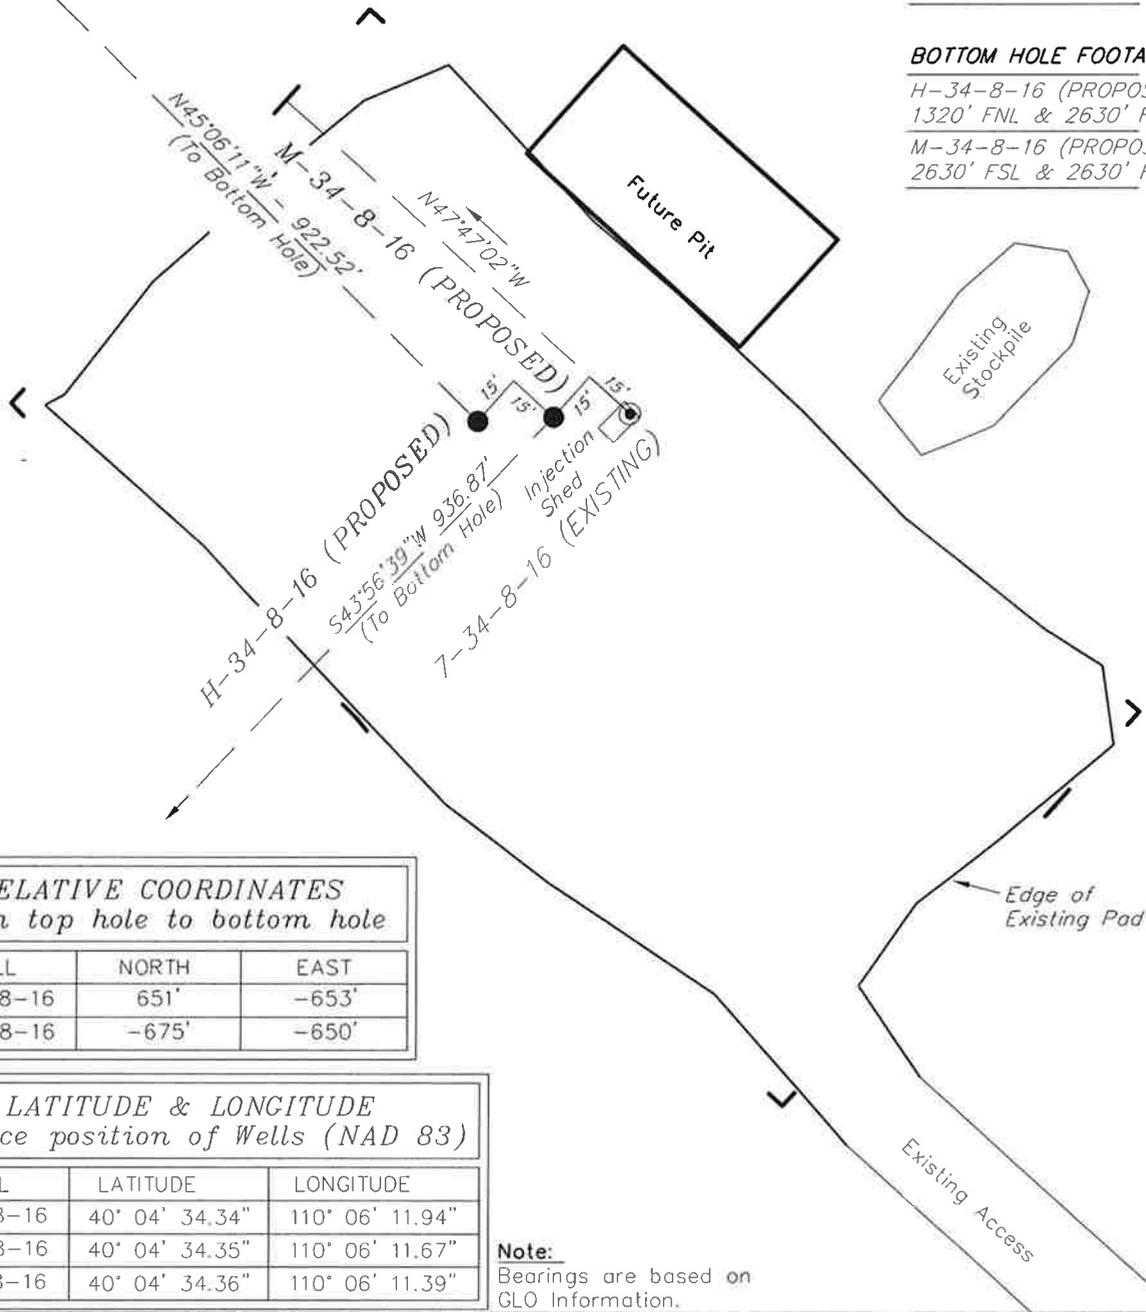

RELATIVE COORDINATES From top hole to bottom hole		
WELL	NORTH	EAST
H-34-8-16	651'	-653'
M-34-8-16	-675'	-650'

LATITUDE & LONGITUDE Surface position of Wells (NAD 83)		
WELL	LATITUDE	LONGITUDE
H-34-8-16	40° 04' 34.34"	110° 06' 11.94"
M-34-8-16	40° 04' 34.35"	110° 06' 11.67"
7-34-8-16	40° 04' 34.36"	110° 06' 11.39"

Note:
Bearings are based on
GLO Information.

SURVEYED BY: T.H.	DATE SURVEYED: 08-07-09
DRAWN BY: M.W.	DATE DRAWN: 08-11-09
SCALE: 1" = 50'	REVISED: M.W. - 01-15-10

(435) 781-2501

Tri State
Land Surveying, Inc.

180 NORTH VERNAL AVE. VERNAL, UTAH 84078



NEWFIELD PRODUCTION COMPANY

H-34-8-16 (Proposed Well)

M-34-8-16 (Proposed Well)

7-34-8-16 (Existing Well)

Pad Location: SWNE Section 34, T8S, R16E, S.L.B.&M.

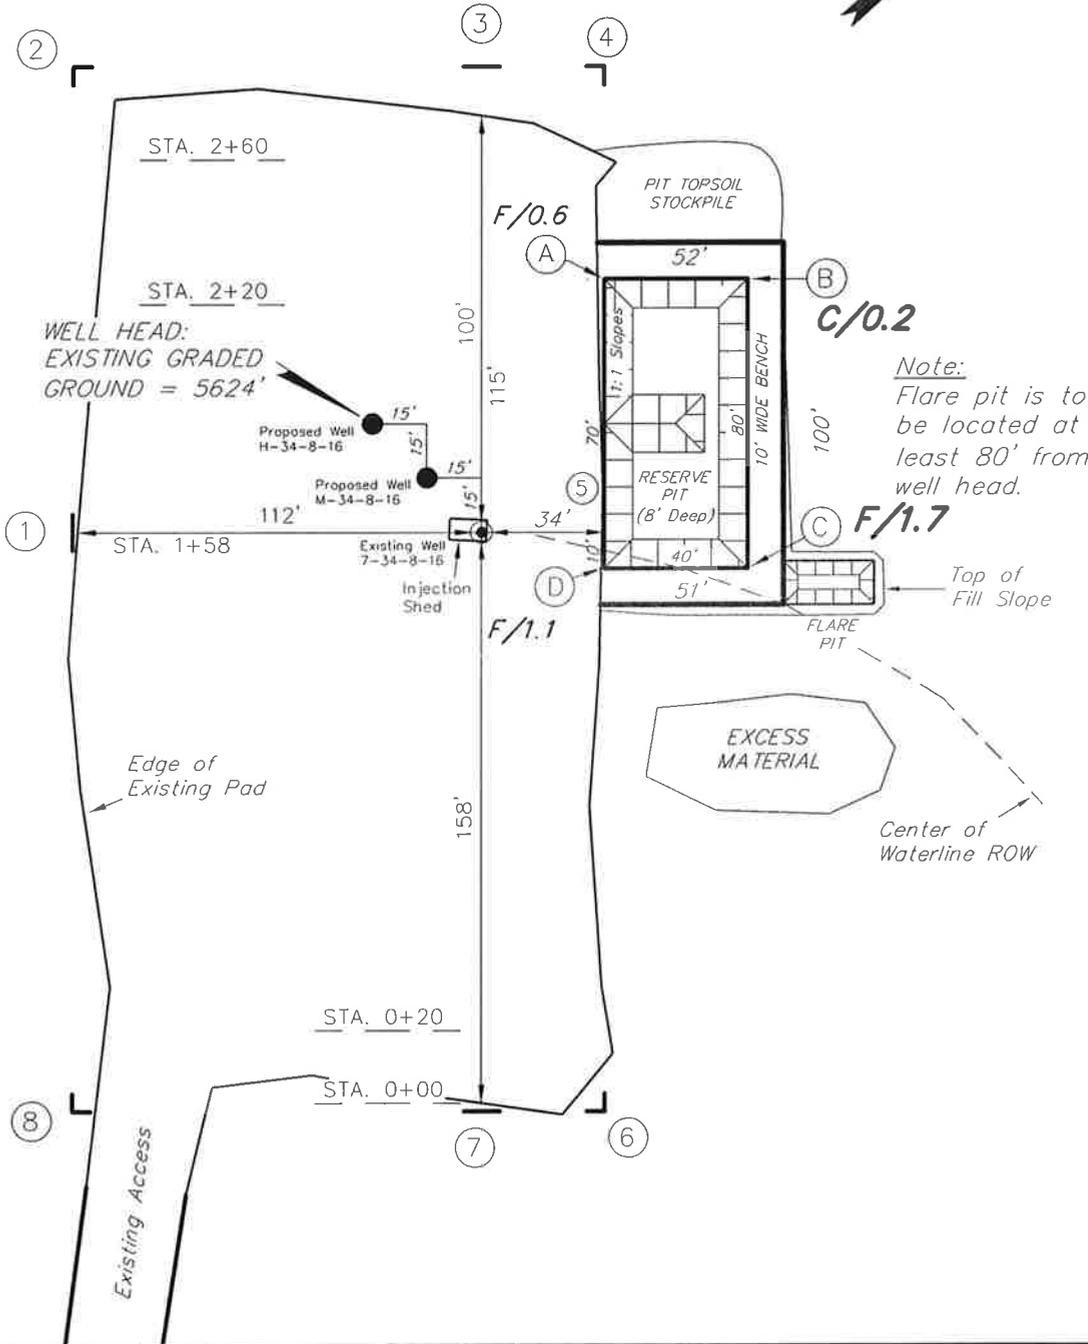

Note:
Flare pit is to be located at least 80' from well head.

SURVEYED BY: T.H.	DATE SURVEYED: 08-07-09
DRAWN BY: M.W.	DATE DRAWN: 08-20-09
SCALE: 1" = 50'	REVISED: M.W. - 01-15-10

Tri State (435) 781-2501
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078





NEWFIELD PRODUCTION COMPANY

H-34-8-16 (Proposed Well)

M-34-8-16 (Proposed Well)

7-34-8-16 (Existing Well)

Pad Location: SWNE Section 34, T8S, R16E, S.L.B.&M.

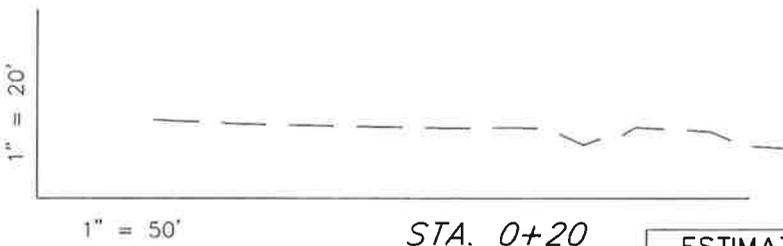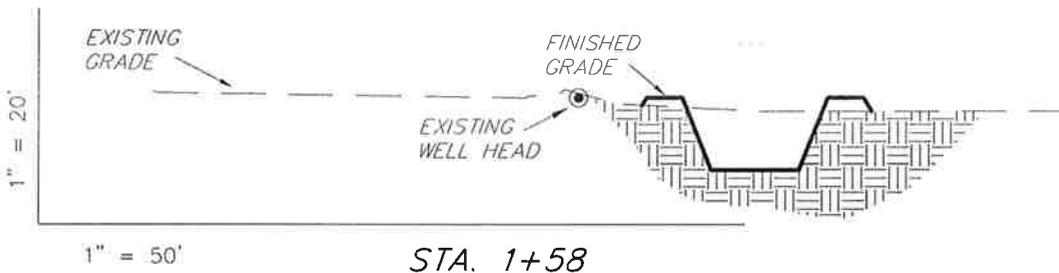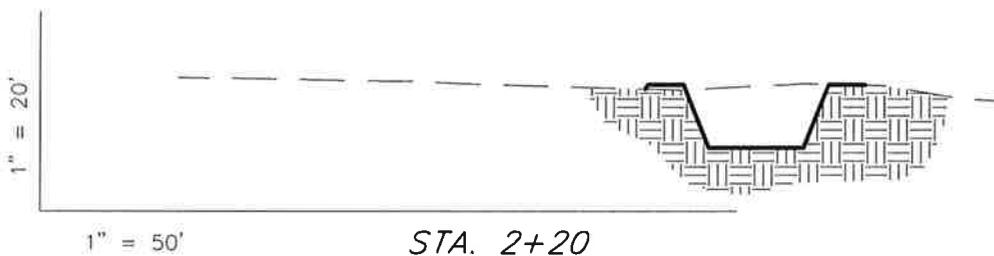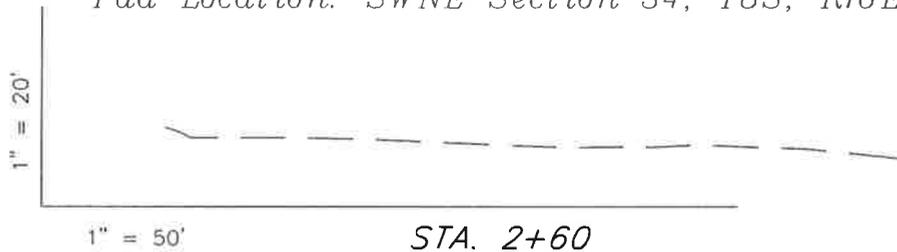

ESTIMATED EARTHWORK QUANTITIES
(No Shrink or swell adjustments have been used)
(Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	-280	250	Topsoil is not included in Pad Cut	-530
PIT	640	0		640
TOTALS	360	250	140	110

NOTE:
UNLESS OTHERWISE NOTED
CUT SLOPES ARE AT 1:1
FILL SLOPES ARE AT 1.5:1

SURVEYED BY: T.H.	DATE SURVEYED: 08-07-09
DRAWN BY: M.W.	DATE DRAWN: 08-20-09
SCALE: 1" = 50'	REVISED: M.W. - 01-15-10

Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078



NEWFIELD PRODUCTION COMPANY

H-34-8-16 (Proposed Well)

M-34-8-16 (Proposed Well)

7-34-8-16 (Existing Well)

Pad Location: SWNE Section 34, T8S, R16E, S.L.B.&M.

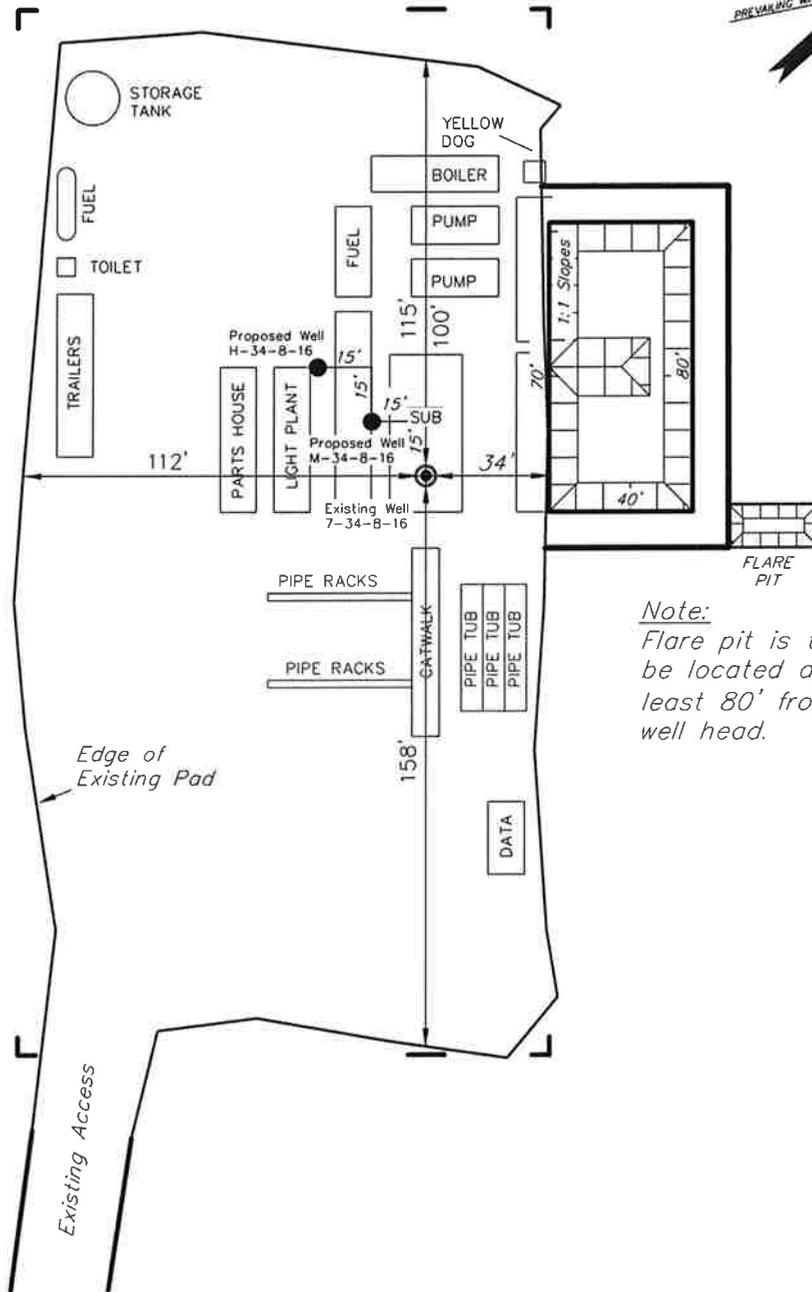

*Note:
Flare pit is to be located at least 80' from well head.*

SURVEYED BY: T.H.	DATE SURVEYED: 08-07-09
DRAWN BY: M.W.	DATE DRAWN: 08-20-09
SCALE: 1" = 50'	REVISED: M.W. - 01-15-10

Tri State (435) 781-2501
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

Newfield Production Company Proposed Site Facility Diagram

Greater Monument Butte H-34-8-16

From the 7-34-8-16 Location

SW/NE Sec. 34 T8S, R16E

Duchesne County, Utah

UTU-16535

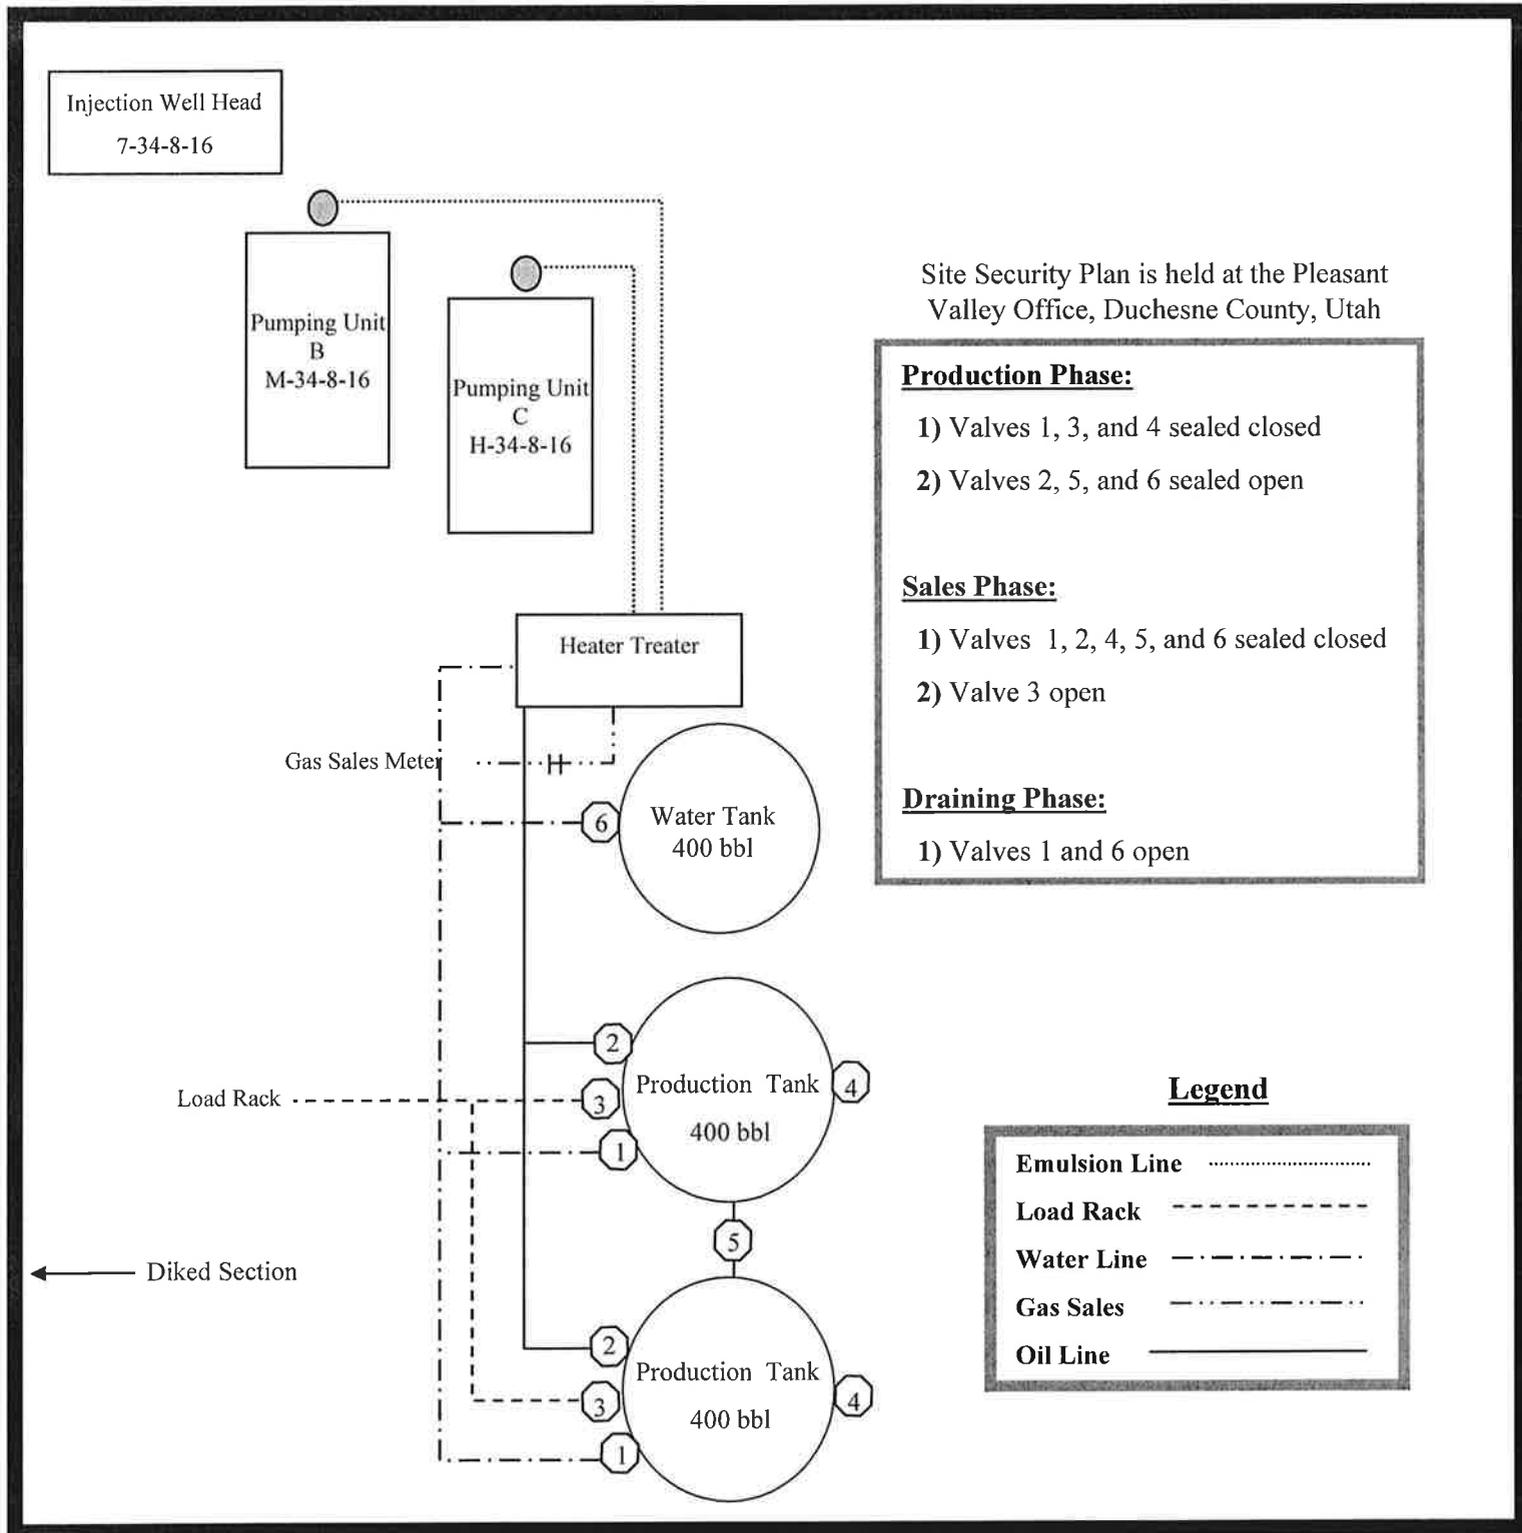


Exhibit "D"

1 of 2

CULTURAL RESOURCE INVENTORY OF
NEWFIELD EXPLORATION'S PROPOSED HAWKEYE
0-26-8-16, TRAVIS B-34-8-16, TRAVIS C-34-8-16
MONUMENT BUTTE H-34-8-16, MONUMENT BUTTE M-34-8-16
AND JONAH UNIT S-11-9-16 DIRECTIONAL WELL
LOCATIONS, DUCHESNE COUNTY, UTAH

By:

Jacki A. Montgomery

Prepared For:

Bureau of Land Management
Vernal Field Office

Prepared Under Contract With:

Newfield Exploration Company
Rt. 3 Box 3630
Myton, UT 84052

Prepared By:

Montgomery Archaeological Consultants, Inc.
P.O. Box 219
Moab, Utah 84532

MOAC Report No. 09-158

September 23, 2009

United States Department of Interior (FLPMA)
Permit No. 09-UT-60122

State of Utah Antiquities Project (Survey)
Permit No. U-09-MQ-0589b

NEWFIELD EXPLORATION COMPANY

**PALEONTOLOGICAL SURVEY OF PROPOSED
PRODUCTION DEVELOPMENT AREAS,
AND PROPOSED PIPELINE ROUTES
DUCHESNE & UINTAH COUNTIES, UTAH**

Site Surveys of Proposed Wells

NE 1/4, NE 1/4, Sec. 25, (1-25-8-16), SE 1/4, NE 1/4, Sec. 24, (D-25-8-16), SW 1/4, SW 1/4, Sec. 24, (E-25-8-16 & P-24-8-16), SE 1/4, SW 1/4, Sec. 34, (Q-34-8-16), NW 1/4, SE 1/4, Sec. 34, (L-34-8-16 & S-34-8-16), NW 1/4, SW 1/4, Sec. 35, (T-34-8-16), NE 1/4, SW 1/4, Sec. 35, (R-35-8-16), SE 1/4, SE 1/4 Sec. 26, (S-26-8-16), NW 1/4, SW 1/4, Sec. 26, (N-26-8-16), SE 1/4, NE 1/4, Sec. 26, (O-25-8-16), SE 1/4, NE 1/4, Sec. 25, (J-25-8-16), NE 1/4, SE 1/4, Sec. 27 (S-27-8-16), SE 1/4, SW 1/4, Sec. 36, (C-1-9-16), SW 1/4, SE 1/4, Sec. 36, (B-1-9-16 & R-36-8-16), SE 1/4, SE 1/4, Sec. 36, (T-36-8-16, A-1-9-16 & K-36-8-16), SW 1/4, NW 1/4, Sec. 26, (O-26-8-16), SW 1/4, NE 1/4, Sec. 34, (H-34-8-16 & M-34-8-16), SW 1/4, SE 1/4, Sec. 27, (B-34-8-16 & C-34-8-16), T 8 S, R 16 E; NE 1/4, SW 1/4, Sec.1, (M-1-9-16), NW 1/4, SE 1/4, Sec.11, (S-11-9-16), T 9 S, R 16 E.

Proposed Pipeline Surveys

SW 1/4, SW 1/4, Sec. 8, T 9 S, R 17 E (14-8-9-17); NW 1/4, SW 1/4, Sec. 7 to SW 1/4, NW 1/4, Sec. 20, T 9 S, R 16 E (12-7-9-16 to 5-20-9-16); SE 1/4, NE 1/4 (8-31-8-18); NW 1/4, SE 1/4 (10-31-8-18); NW 1/4, SE 1/4, to SW 1/4, NE 1/4 (32-29-8-18);

REPORT OF SURVEY

Prepared for:

Newfield Exploration Company



Prepared by:

Wade E. Miller
Consulting Paleontologist
October 1, 2009

API Number: 4301350225
Well Name: Greater Monument Butte H-34-8-16
Township 08.0 S Range 16.0 E Section 34
Meridian: SLBM
Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared:
 Map Produced by Diana Mason

Units	Wells Query
STATUS	Status
ACTIVE	APD - Approved Permit
EXPLORATORY	DRL - Spudded (Drilling Commenced)
GAS STORAGE	GIW - Gas Injection
NF PP OIL	GS - Gas Storage
NF SECONDARY	LA - Location Abandoned
PI OIL	LOC - New Location
PP GAS	OPS - Operation Suspended
PP GEOTHERMAL	PA - Plugged Abandoned
PP OIL	PGW - Producing Gas Well
SECONDARY	POW - Producing Oil Well
TERMINATED	RET - Returned APD
Fields	SGW - Shut-in Gas Well
Unknown	SOW - Shut-in Oil Well
ABANDONED	TA - Temp. Abandoned
ACTIVE	TW - Test Well
COMBINED	WOW - Water Disposal
INACTIVE	WWI - Water Injection Well
STORAGE	WSW - Water Supply Well
TERMINATED	
Sections	
Township	

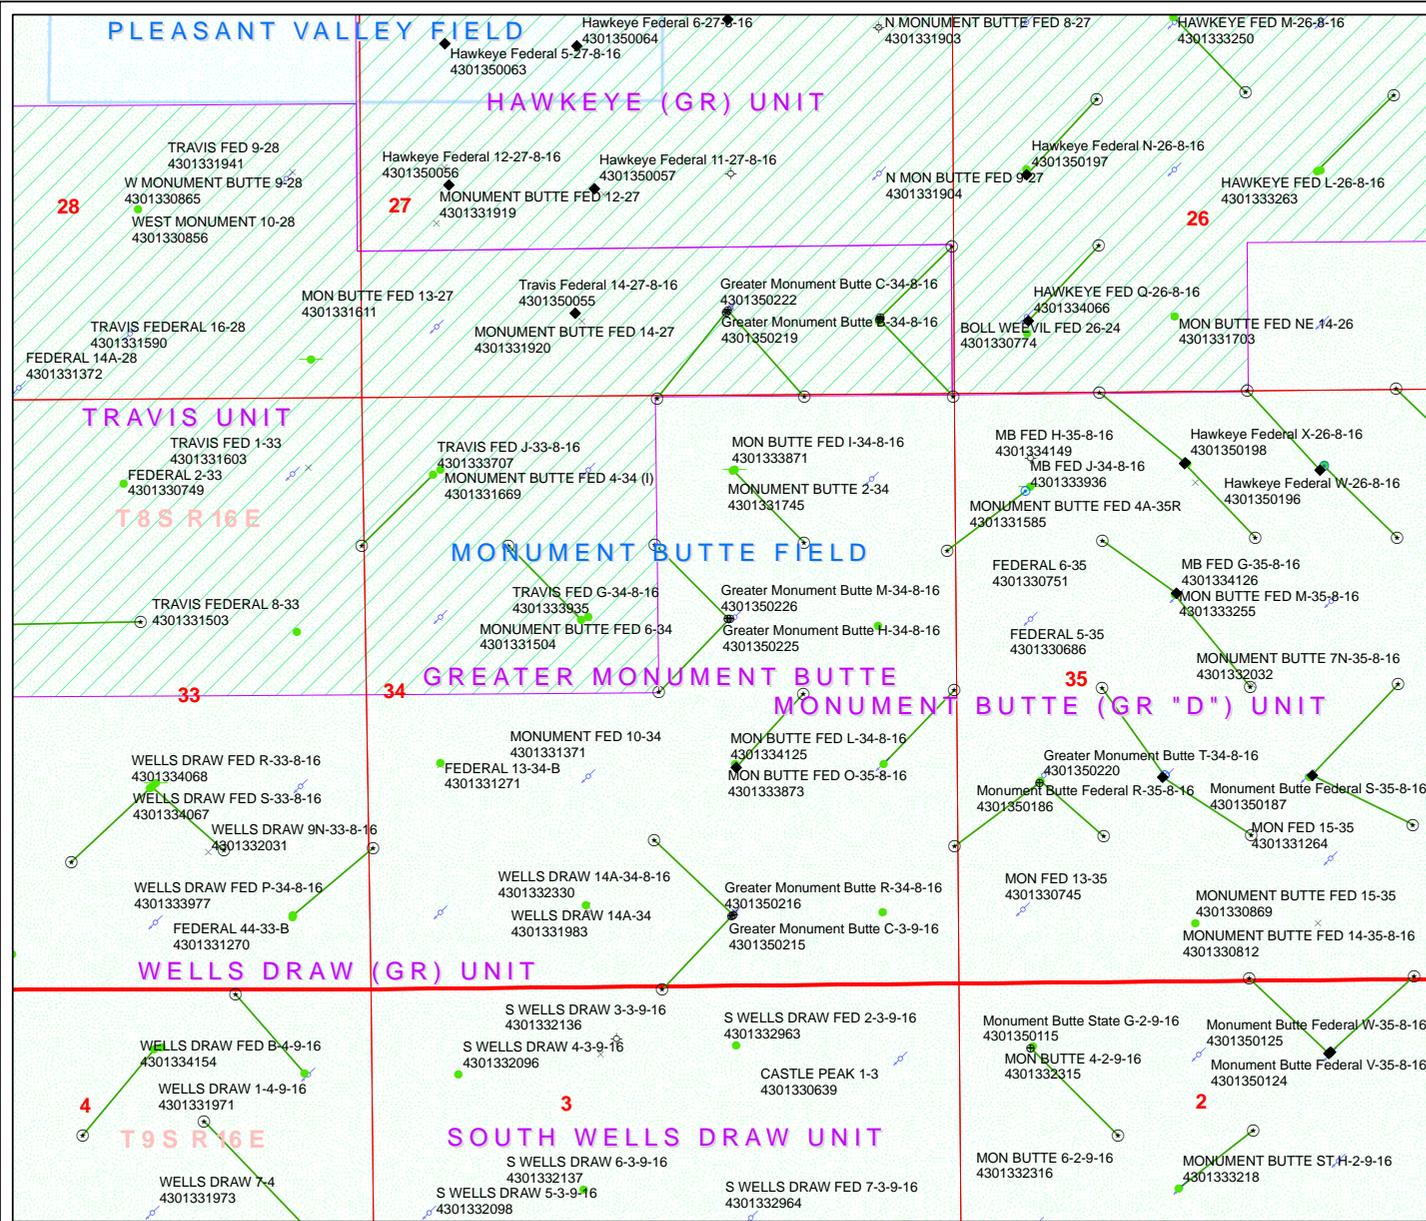



2297

January 22, 2010

State of Utah, Division of Oil, Gas and Mining
ATTN: Diana Mason
P.O. Box 145801
Salt Lake City, UT 84114-5801

RE: Directional Drilling
Greater Monument Butte H-34-8-16
Greater Monument Butte (Green River) Unit

Surface Hole: T8S-R16E Section 34: SWNE (UTU-16535)
1981' FNL 2021' FEL

At Target: T8S-R16E Section 34: NENW (UTU-62848)
1320' FNL 2630' FWL

Duchesne County, Utah

Dear Ms. Mason;

Pursuant to the filing by Newfield Production Company (NPC) of an Application for Permit to Drill the above referenced well dated 1/21/10, a copy of which is attached, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole and target locations of this well are both within the boundaries of the Greater Monument Butte Unit (UTU-87538X), of which Newfield certifies that it is the operator. Further, Newfield Certifies that all lands within 460 feet of the entire directional well bore are within the Greater Monument Butte Unit.

NPC is permitting this well as a directional well in order to mitigate surface disturbance by utilizing pre-existing roads and pipelines.

NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please contact the undersigned at 303-383-4197 or by email at sgillespie@newfield.com. Your consideration in this matter is greatly appreciated.

Sincerely,
Newfield Production Company

A handwritten signature in blue ink that reads "Shane Gillespie".

Shane Gillespie
Land Associate

RECEIVED
JAN 28 2010
DIV. OF OIL, GAS & MINING

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

February 1, 2010

Memorandum

To: Assistant District Manager Minerals, Vernal District
From: Michael Coulthard, Petroleum Engineer
Subject: 2010 Plan of Development Greater Monument
Butte Unit, Duchesne and Uintah Counties,
Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2010 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

API#	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-50224	GMBU F-1-9-16	Sec 02 T09S R16E 0734 FNL 0740 FEL BHL Sec 01 T09S R16E 1325 FNL 0010 FWL
43-013-50225	GMBU H-34-8-16	Sec 34 T08S R16E 1981 FNL 2021 FEL BHL Sec 34 T08S R16E 1320 FNL 2630 FWL
43-013-50226	GMBU M-34-8-16	Sec 34 T08S R16E 1980 FNL 2000 FEL BHL Sec 34 T08S R16E 2640 FNL 2640 FEL
43-013-50231	GMBU T-24-8-16	Sec 19 T08S R17E 1928 FSL 0623 FWL BHL Sec 24 T08S R16E 1395 FSL 0010 FEL
43-013-50232	GMBU P-24-8-16	Sec 24 T08S R16E 0644 FSL 0646 FWL BHL Sec 24 T08S R16E 1320 FSL 0010 FWL
43-013-50233	GMBU E-25-8-16	Sec 24 T08S R16E 0629 FSL 0631 FWL BHL Sec 25 T08S R16E 0010 FNL 0010 FWL
43-013-50234	GMBU D-25-8-16	Sec 24 T08S R16E 0629 FSL 1951 FWL BHL Sec 25 T08S R16E 0010 FNL 1310 FWL
43-013-50235	GMBU J-25-8-16	Sec 25 T08S R16E 1948 FNL 0633 FEL BHL Sec 25 T08S R16E 1320 FNL 0010 FEL

API #	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-50236	GMBU O-25-8-16	Sec 26 T08S R16E 1928 FNL 0680 FEL BHL Sec 25 T08S R16E 2630 FNL 0010 FWL
43-013-50237	GMBU O-26-8-16	Sec 26 T08S R16E 1996 FNL 0648 FWL BHL Sec 26 T08S R16E 2640 FNL 0000 FWL
43-013-50238	GMBU S-26-8-16	Sec 26 T08S R16E 0483 FSL 0660 FEL BHL Sec 26 T08S R16E 1310 FSL 1310 FEL
43-013-50239	GMBU S-27-8-16	Sec 27 T08S R16E 2002 FSL 0657 FEL BHL Sec 27 T08S R16E 1310 FSL 1330 FEL
43-013-50240	GMBU S-34-8-16	Sec 34 T08S R16E 1994 FSL 1940 FEL BHL Sec 34 T08S R16E 1310 FSL 1310 FEL
43-013-50241	GMBU T-25-8-16	Sec 30 T08S R17E 1940 FSL 0645 FWL BHL Sec 25 T08S R16E 1280 FSL 0010 FEL

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard

bcc: File - Greater Monument Butte Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:2-1-10

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 1/21/2010

API NO. ASSIGNED: 43013502250000

WELL NAME: Greater Monument Butte H-34-8-16

OPERATOR: NEWFIELD PRODUCTION COMPANY (N2695)

PHONE NUMBER: 435 646-4825

CONTACT: Mandie Crozier

PROPOSED LOCATION: SWNE 34 080S 160E

Permit Tech Review:

SURFACE: 1981 FNL 2021 FEL

Engineering Review:

BOTTOM: 1320 FNL 2630 FWL

Geology Review:

COUNTY: DUCHESNE

LATITUDE: 40.07619

LONGITUDE: -110.10260

UTM SURF EASTINGS: 576519.00

NORTHINGS: 4436389.00

FIELD NAME: MONUMENT BUTTE

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-16535

PROPOSED PRODUCING FORMATION(S): GREEN RIVER

SURFACE OWNER: 1 - Federal

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

- PLAT**
- Bond:** FEDERAL - WYB000493
- Potash**
- Oil Shale 190-5**
- Oil Shale 190-3**
- Oil Shale 190-13**
- Water Permit:** 43-7478
- RDCC Review:**
- Fee Surface Agreement**
- Intent to Commingle**


Commingle Approved

LOCATION AND SITING:

- R649-2-3.**
Unit: GMBU (GRRV)
- R649-3-2. General**
- R649-3-3. Exception**
- Drilling Unit**
Board Cause No: Cause 213-11
Effective Date: 11/30/2009
Siting: Suspends General Siting
- R649-3-11. Directional Drill**

Comments: Presite Completed

Stipulations: 4 - Federal Approval - dmason
15 - Directional - dmason
27 - Other - bhill



State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: Greater Monument Butte H-34-8-16
API Well Number: 43013502250000
Lease Number: UTU-16535
Surface Owner: FEDERAL
Approval Date: 2/3/2010

Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:


- Within 24 hours following the spudding of the well – contact Carol Daniels at 801-538-5284 (please leave a voicemail message if not available)
OR
submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <https://oilgas.ogm.utah.gov>

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

Approved By:

A handwritten signature in black ink, appearing to read "Gil Hunt". The signature is fluid and cursive, with a long horizontal stroke extending to the right.

Gil Hunt
Associate Director, Oil & Gas

RECEIVED
JAN 29 2010
RECEIVED
JAN 29 2010
BLM

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires July 31, 2010

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. U-16535
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name NA
2. Name of Operator Newfield Production Company		7. If Unit or CA Agreement, Name and No. Greater Monument Butte
3a. Address Route #3 Box 3630, Myton UT 84052		8. Lease Name and Well No. Greater Monument Butte H-34-8-16
3b. Phone No. (include area code) (435) 646-3721		9. API Well No. 43-013-50225
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface SW/NE 1981' FNL 2021' FEL Sec. 34, T8S R16E (UTU-16535) At proposed prod. zone NE/NW 1320' FNL 2630' FWL Sec. 34, T8S R16E (UTU-62848)		10. Field and Pool, or Exploratory Monument Butte
14. Distance in miles and direction from nearest town or post office* Approximately 11.3 miles southwest of Myton, UT		11. Sec., T. R. M. or Blk. and Survey or Area Sec. 34, T8S R16E
15. Distance from proposed* location to nearest property or lease line, ft. Approx. 10' f/lse, NA' f/unit (Also to nearest drig. unit line, if any)	16. No. of acres in lease 920.00	17. Spacing Unit dedicated to this well 20 Acres
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1330'	19. Proposed Depth 6,560'	20. BLM/BIA Bond No. on file WYB000493
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5624' GL	22. Approximate date work will start* 2nd Qtr. 2010	23. Estimated duration (7) days from SPUD to rig release
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- | | |
|---|---|
| <ol style="list-style-type: none"> 1. Well plat certified by a registered surveyor. 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | <ol style="list-style-type: none"> 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification 6. Such other site specific information and/or plans as may be required by the BLM. |
|---|---|

25. Signature 	Name (Printed/Typed) Mandie Crozier	Date 1/21/10
Title Regulatory Specialist		
Approved by (Signature) 	Name (Printed/Typed) James H. Sparger	Date OCT 07 2010
Title Acting Assistant Field Manager Lands & Mineral Resources		
Office VERNAL FIELD OFFICE		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

CONDITIONS OF APPROVAL ATTACHED

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

NOTICE OF APPROVAL

RECEIVED

OCT 14 2010

DIV. OF OIL, GAS & MINING

NOS 10-08-2009

AFMSS# 105XS0054A





UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Newfield Production Company Location: SWNE, Sec. 34, T8S, R16E
Well No: Greater Monument Butte H-34-8-16 Lease No: UTU-16535
API No: 43-013-50225 Agreement: Greater Monument Butte Unit

OFFICE NUMBER: (435) 781-4400

OFFICE FAX NUMBER: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify Environmental Scientist)	-	Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	-	Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings to: ut_vn_opreport@blm.gov .
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

**SURFACE USE PROGRAM
 CONDITIONS OF APPROVAL (COAs)**

- All new and replacement internal combustion gas field engines of less than or equal to 300 design-rated horsepower must not emit more than 2 gms of NO_x per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower.
- All and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 gms of NO_x per horsepower-hour.
- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.
- Construction and drilling is not allowed from May 1st – June 15th to minimize impacts during Mountain plover nesting.
- If it is anticipated that construction or drilling will occur during the given timing restriction, a BLM or qualified biologist shall be notified so surveys can be conducted. Depending upon the results of the surveys, permission to proceed may or may not be recommended or granted by the BLM biologist.
- Prior to construction, an invasive plants/noxious weeds inventory will be completed for all areas where surface disturbance will occur, and a completed Weed Inventory Form will be submitted to the BLM Authorized Officer.

Reclamation

- Reclamation will be completed in accordance with the Newfield Exploration Company Castle Peak and Eight Mile Flat Reclamation Plan on file with the Vernal Field Office of the BLM.

Seed Mix (Interim and Final Reclamation)

Common name	Latin name	lbs/acre	Recommended seed planting depth
Squirreltail grass	<i>Elymus elymoides</i>	3.0	¼ - ½"
Needle and thread grass	<i>Hesperostipa comata</i>	3.0	½"
Idaho fescue	<i>Festuca idahoensis</i>	2.0	¼ - ½"
Shadscale saltbush	<i>Atriplex confertifolia</i>	3.0	½"
Four-wing saltbush	<i>Atriplex canescens</i>	3.0	½"
Gardner's saltbush	<i>Atriplex gardneri</i>	2.0	½"
Blue flax (Lewis flax)	<i>Linum lewisii</i>	2.0	⅛ - ¼"

- All pounds are pure live seed.
- All seed and mulch will be certified weed free.
- Rates are set for drill seeding; double rate if broadcasting.

Monitoring and Reporting

- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) that designates the proposed site-specific monitoring and reference sites chosen for the location. A description of the proposed sites shall be included, as well as a map showing the locations of the proposed sites.
- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) 3 growing seasons after reclamation efforts have occurred evaluating the status of the reclaimed areas in order to determine whether the BLM standards set forth in the Green River District Reclamation Guidelines have been met (30% or greater basal cover).

DOWNHOLE PROGRAM CONDITIONS OF APPROVAL (COAs)

SITE SPECIFIC DOWNHOLE COAs:

- The operator shall comply with all applicable requirements in the SOP (version: "Greater Monument Butte Green River Development Program June 24, 2008). The operator shall also comply with applicable laws and regulations; with the lease terms, Onshore Oil and Gas Orders, NTL's; and with other orders and instructions of the authorized officer.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB

or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4.

Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

STATE OF UTAH
 DIVISION OF OIL, GAS AND MINING
 ENTITY ACTION FORM - FORM 6

OPERATOR: NEWFIELD PRODUCTION COMPANY
 ADDRESS: RT. 3 BOX 3630
MYTON, UT 84052


OPERATOR ACCT. NO. N2695

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION				SPUD DATE	EFFECTIVE DATE	
					QQ	SC	TP	RG			COUNTY
B	99999	17400	4301350225	GREATER MON BUTTE H-34-8-16	SWNE	34	8S	16E	DUCHESNE	12/9/2010	12/15/10
WELL 1 COMMENTS: GRRV BHL NENW											
A	99999	17901	4304751170	UTE TRIBAL 13-21-4-2E	SWSW	21	4S	2E	UINTAH	12/10/2010	12/15/10
GRRV											

- ACTION CODES (See instructions on back of form)
- A - 1 new entity for new well (single well only)
 - B - well to existing entity (group or unit well)
 - C - from one existing entity to another existing entity
 - D - well from one existing entity to a new entity
 - E - other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

RECEIVED
 DEC 13 2010
 DIV. OF OIL, GAS & MINING


 Signature _____ Jentri Park
 Production Clerk _____ 12/13/10

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SUBMIT IN TRIPLICATE - Other Instructions on page 2

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
NEWFIELD PRODUCTION COMPANY

3a. Address: Route 3 Box 3630
Myton, UT 84052

3b. Phone (include are code)
435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
1981 FNL 2021 FEL
Section 34 T8S R16E

5. Lease Serial No.

USA UTU-16535

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or

GMBU

8. Well Name and No.

MON BUTTE H-34-8-16

9. API Well No.

4301350225

10. Field and Pool, or Exploratory Area

GREATER MB UNIT

11. County or Parish, State

DUCHESNE, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Spud Notice _____
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	_____

13. Describe Proposed or Completed Operation: (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 12/10/10 MIRU Ross # 29. Spud well @ 8:00 AM. Drill 310' of 12 1/4" hole with air mist. TIH W/ 7 Jt's 8 5/8" J-55 24 # csgn. Set @ 307.90 KB. On 12/15/10 cement with 160 sks of class "G" w/ 2% CaCL2 + 1/4# sk Cello- Flake Mixed @ 15.8 ppg > 1.17 cf/ sk yield. Returned 6 bbls cement to pit. WOC.

I hereby certify that the foregoing is true and correct (Printed/Typed)

Ryan Crum

Title

Drilling Foreman

Signature

Date

12/21/2010

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

RECEIVED

(Instructions on page 2)

JAN 03 2011

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

5. LEASE DESIGNATION AND SERIAL NUMBER:
USA UTU-16535

SUNDRY NOTICES AND REPORTS ON WELLS

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

7. UNIT or CA AGREEMENT NAME:
GMBU

1. TYPE OF WELL: OIL WELL GAS WELL OTHER

8. WELL NAME and NUMBER:
MON BUTTE H-34-8-16

2. NAME OF OPERATOR:
NEWFIELD PRODUCTION COMPANY

9. API NUMBER:
4301350225

3. ADDRESS OF OPERATOR: Route 3 Box 3630 CITY Myton STATE UT ZIP 84052 PHONE NUMBER 435.646.3721

10. FIELD AND POOL, OR WILDCAT:
GREATER MB UNIT

4. LOCATION OF WELL:
FOOTAGES AT SURFACE:

COUNTY: DUCHESNE

OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: , 34, T8S, R16E

STATE: UT

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARITLY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: 02/09/2011	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/STOP)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: - Weekly Status Report
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The above subject well was completed on 02-09-11, attached is a daily completion status report.

NAME (PLEASE PRINT) Lucy Chavez-Naupoto

TITLE Administrative Assistant

SIGNATURE 

DATE 02/14/2011

(This space for State use only)

RECEIVED

FEB 22 2011

DIV. OF OIL, GAS & MINING

Daily Activity Report

Format For Sundry

MON BUTTE H-34-8-16

12/1/2010 To 4/28/2011

1/19/2011 Day: 1

Completion

Rigless on 1/19/2011 - Ran CBL & perforated 1st stage. SIWFN w/ 158 BWTR. - NU frac head & Cameron BOP's. RU Hot oiler & test casing, frac head, frac valves & BOP to 4500 psi. RU WLT w/ mast & pack off tool. Run CBL under pressure. WLTD was 6532' w/ TOC @ 60'. RIH w/ 3 1/8" ported guns & perforate CP5 sds @ 6413- 17' & CP4 sds @ 6364-6367' w/ (11 gram, .36"EH, 16.82¢ pen. 120°) 3 spf for total of 21 shots. RD WLT & Hot Oiler. SIWFN w/ 158 BWTR.

Daily Cost: \$0

Cumulative Cost: \$13,173

1/26/2011 Day: 2

Completion

Rigless on 1/26/2011 - Frac stage 1 with BJ Services. Frac and perforate stages 2-6 with BJ Services and Perforators. - Move in, rig up BJ Services and Perforators Wireline. Frac 1st stage as shown in simulation report. Frac and perforate stages 2-6 with BJ Services and Perforators as shown in perforation and simulation report. Open well up for immediate flowback at approximately 3 bpm. Well flowed for 3 hours and died. Shut well in for night. Recovered approx 432 bbls. 1930 BWTR.

Daily Cost: \$0

Cumulative Cost: \$105,131

2/4/2011 Day: 3

Completion

Stone #8 on 2/4/2011 - Moved onto well and thawed out wellhead. Picked up tubing and drilled out first plug. Took 1100 psi kick and circulated well. SWIFN. - Crew travel and safety meeting on NU/ND BOPs. Shut in casing pressure at 150 psi. Thaw out wellhead and bleed down well. Nipple up BOPs and flanges. Rig up rig floor and get equipment ready to pick up tubing. Pick up 30 joints of tubing and pump 5 bbls down tubing to keep well dead. Run in hole and tag sand at 4756', clean out 194' of sand, and drill out plug at 4940' for 1.75 hours. Took 1100 psi kick and gained 350 bbls of fluid. Circulated hole at 3 bpm and 700 psi. Returned a lot of sand while circulating hole. Drain pump and lines and SWIFN. 1580 BWTR.

Daily Cost: \$0

Cumulative Cost: \$111,237

2/7/2011 Day: 4

Completion

Stone #8 on 2/7/2011 - Drilled out plugs and cleaned out well to PBTD. Layed down 3 joints of tubing and left well flowing over the weekend. - Crew travel and safety meeting on drilling out plugs using the swivel and pump. Shut in casing pressure at 1700 psi and shut in tubing pressure at 1500 psi. Thaw out well and bleed off pressure. Circulate well through tubing and recover a lot of sand. Run in hole with 14 joints of tubing, tag plug at 5400', and drill out plug for 25 minutes. Run in hole with 12 joints, tag plug at 5750', and drill out plug for 25 minutes. Run in hole with 8 joints, tag plug at 6010', and drill out plug for 30 minutes. Run in hole with 6 joints, clean out 56' of sand, tag plug at 6205', and drill out plug for 90 minutes. Run in hole with 13 joints of tubing, clean out 218' of sand, and tag PBTD at 6621'. Circulate well clean, lay down 3 joints of tubing, and leave well flowing for the weekend. Total gain of 700 bbls.

880 BWTR.

Daily Cost: \$0

Cumulative Cost: \$122,891

2/8/2011 Day: 5

Completion

Stone #8 on 2/8/2011 - Tripped out of hole with tubing to lay down bit and bit sub. Ran into hole with production tubing. Killed well with brine, landed tubing, and SWIFN. - Run in hole with notched collar, 2 joints of tubing, seat nipple, 1 joint of tubing, 5-1/2" tubing anchor, and 48 joints of tubing. Pump brine down tubing to keep well dead but casing and tubing started blowing fluid. Pump brine down tubing to kill well. Run in hole with rest of the tubing, circulate hole with 180 bbls of brine, and set tubing anchor with 18,000 lbs of tension. Rig down work floor, nipple down BOPs, land tubing, and nipple up wellhead. Drain pump and SWIFN. Used at total of 450 bbls of brine. 880 BWTR. - Crew travel and safety meeting on using pump, tripping tubing, and picking up rods. Shut in casing pressure at 400 psi and shut in tubing pressure at 400 psi. Thaw well, rig up pump, and pump 30 bbls down tubing. Pick up 3 joints of tubing and tag 5' of sand. Pump 160 bbls of water down casing and up tubing. Lay down 16 joints of tubing, pull out of hole with 207 joints of tubing, and lay down bit and bit sub. Casing started flowing.

Daily Cost: \$0

Cumulative Cost: \$169,543

2/9/2011 Day: 6

Completion

Stone #8 on 2/9/2011 - Changed over equipment to run rods and let casing flow. Picked up and primed Central Hydraulic 25-175-RHAC-20-4-21-24 pump. Ran in hole with rod detail as follows: (4) 1-1/2" weight bars, (250) 7/8" 8per guided rods, and (1) polish rod. - Crew travel and safety meeting on picking up rods. Shut in casing pressure at 550 psi and shut in tubing pressure at 400 psi. Thaw well and flush tubing with 50 bbls of water. Change over equipment to run rods and let casing flow. Pick up and prime Central Hydraulic 25-175-RHAC-20-4-21-24 pump. Run in hole with rod detail as follows: (4) 1-1/2" weight bars, (250) 7/8" 8per guided rods, and (1) 1-1/2" x 30' polish rod. Placed 4' stabilizer on top of pump. Rig up unit and test pump to 800 psi. Pump tested good. Drain lines and rack out pump. Move rig to the 14-19-4-1W. **Finalized**

Daily Cost: \$0

Cumulative Cost: \$206,903

Pertinent Files: Go to File List

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. Lease Serial No.
UTU-16535

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No.
GMBU

8. Lease Name and Well No.
GREATER MONUMENT BT H-34-8-16

9. AFI Well No.
43-013-50225

10. Field and Pool or Exploratory
GREATER MB UNIT

11. Sec., T., R., M., on Block and Survey or Area
SEC. 34, T8S, R16E

12. County or Parish
DUCHESNE

13. State
UT

14. Date Spudded
12/10/2010

15. Date T.D. Reached
01/08/2011

16. Date Completed
02/08/2011
 D & A Ready to Prod.

17. Elevations (DF, RKB, RT, GL)*
5624' GL 5636' KB

18. Total Depth: MD 6645' TVD 6524'

19. Plug Back T.D.: MD 6532' TVD 6511'

20. Depth Bridge Plug Set: MD TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
DUAL IND GRD, SP, COMP. DENSITY, COMP. NEUTRON, GR, CALIPER, CMT BOND

22. Was well cored? No Yes (Submit analysis)
Was DST run? No Yes (Submit report)
Directional Survey? No Yes (Submit copy)

BHL Reviewed
by HSM

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	8-5/8" J-55	24#	0	308'		160 CLASS G			
7-7/8"	5-1/2" J-55	15.5#	0	6635'		300 PRIMLITE		60'	
						425 50/50 POZ			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-7/8"	EOT@ 6474'	TA @ 6375'						

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Green River	4633'	6417'	4633-6417'	.36"	147	
B)						
C)						
D)						

26. Perforation Record

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Depth Interval	Amount and Type of Material
4633-6417'	Frac w/ 164750#'s 20/40 sand in 1299 bbls of Lightning 17 fluid in 6 stages

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
02/05/11	02/22/11	24	→	152	0.00	232			2-1/2" x 1-3/4" x 20' x 24' RHAC Pump
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
	SI		→					PRODUCING	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
	SI		→						

RECEIVED
MAR 01 2011

*(See instructions and spaces for additional data on page 2)

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

29. Disposition of Gas (Solid, used for fuel, vented, etc.)

USED FOR FUEL

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

GEOLOGICAL MARKERS


Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
GREEN RIVER	4633'	6417'		GARDEN GULCH MRK	4069'
				GARDEN GULCH 1	4287'
				GARDEN GULCH 2	4408'
				POINT 3	4685'
				X MRKR	4944'
				Y MRKR	4978'
				DOUGALS CREEK MRK	5105'
				BI CARBONATE MRK	5364'
				B LIMESTON MRK	5497'
				CASTLE PEAK	6011'
				BASAL CARBONATE	6440'
				WASATCH	6569'

32. Additional remarks (include plugging procedure):

33. Indicate which items have been attached by placing a check in the appropriate boxes:

- Electrical/Mechanical Logs (1 full set req'd.)
 Geologic Report
 DST Report
 Directional Survey
 Sundry Notice for plugging and cement verification
 Core Analysis
 Other: Drilling Daily Activity

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Lucy Chavez-Naupoto Title Administrative Assistant
 Signature  Date 02/24/2011

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

NEWFIELD



NEWFIELD EXPLORATION

**USGS Myton SW (UT)
SECTION 34 T8S, R16E
H-34-8-16**

Wellbore #1

Design: Actual

Standard Survey Report

07 January, 2011



PayZone Directional Services, LLC.

Survey Report



Company:	NEWFIELD EXPLORATION	Local Co-ordinate Reference:	Well H-34-8-16
Project:	USGS Myton SW (UT)	TVD Reference:	WELL @ 5636.0ft (Original Well Elev)
Site:	SECTION 34 T8S, R16E	MD Reference:	WELL @ 5636.0ft (Original Well Elev)
Well:	H-34-8-16	North Reference:	True
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Actual	Database:	EDM 2003.21 Single User Db

Project	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		

Site	SECTION 34 T8S, R16E, SEC 34 T8S, R16E				
Site Position:		Northing:	7,199,000.00 ft	Latitude:	40° 4' 29.106 N
From:	Lat/Long	Easting:	2,031,000.00 ft	Longitude:	110° 6' 14.985 W
Position Uncertainty:	0.0 ft	Slot Radius:	"	Grid Convergence:	0.89 °

Well	H-34-8-16, SHL LAT 40 04 34.34, LONG -110 06 11.94					
Well Position	+N/-S	0.0 ft	Northing:	7,199,533.20 ft	Latitude:	40° 4' 34.340 N
	+E/-W	0.0 ft	Easting:	2,031,228.37 ft	Longitude:	110° 6' 11.940 W
Position Uncertainty		0.0 ft	Wellhead Elevation:	5,636.0 ft	Ground Level:	5,624.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	2009/12/15	11.51	65.86	52,460

Design	Actual				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
	0.0	0.0	0.0	314.90	

Survey Program	Date	2011/01/07			
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description	
331.0	6,645.0	Survey #1 (Wellbore #1)	MWD	MWD - Standard	

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
331.0	2.81	154.20	330.9	-7.3	3.5	-7.7	0.85	0.85	0.00
362.0	2.93	152.99	361.8	-8.7	4.2	-9.1	0.43	0.39	-3.90
393.0	2.77	152.35	392.8	-10.1	4.9	-10.6	0.53	-0.52	-2.06
423.0	2.20	150.38	422.8	-11.2	5.6	-11.8	1.92	-1.90	-6.57
454.0	1.67	150.29	453.7	-12.1	6.1	-12.9	1.71	-1.71	-0.29
484.0	0.80	163.00	483.7	-12.7	6.3	-13.5	3.02	-2.90	42.37
515.0	0.30	264.50	514.7	-12.9	6.3	-13.6	2.93	-1.61	327.42
545.0	0.92	313.19	544.7	-12.8	6.1	-13.3	2.52	2.07	162.30
576.0	1.70	316.50	575.7	-12.3	5.6	-12.6	2.53	2.52	10.68
606.0	2.20	319.80	605.7	-11.5	4.9	-11.6	1.71	1.67	11.00
636.0	2.70	318.50	635.7	-10.5	4.1	-10.3	1.68	1.67	-4.33
667.0	3.40	316.60	666.6	-9.3	2.9	-8.7	2.28	2.26	-6.13



PayZone Directional Services, LLC.

Survey Report



Company: NEWFIELD EXPLORATION
 Project: USGS Myton SW (UT)
 Site: SECTION 34 T8S, R16E
 Well: H-34-8-16
 Wellbore: Wellbore #1
 Design: Actual

Local Co-ordinate Reference: Well H-34-8-16
 TVD Reference: WELL @ 5636.0ft (Original Well Elev)
 MD Reference: WELL @ 5636.0ft (Original Well Elev)
 North Reference: True
 Survey Calculation Method: Minimum Curvature
 Database: EDM 2003.21 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
697.0	4.00	320.00	696.6	-7.9	1.7	-6.7	2.13	2.00	11.33
728.0	4.60	318.20	727.5	-6.1	0.1	-4.4	1.98	1.94	-5.81
759.0	5.40	317.20	758.4	-4.1	-1.7	-1.7	2.60	2.58	-3.23
789.0	6.00	316.90	788.2	-1.9	-3.7	1.3	2.00	2.00	-1.00
820.0	6.50	317.90	819.0	0.6	-6.0	4.6	1.65	1.61	3.23
850.0	6.99	318.07	848.8	3.2	-8.4	8.2	1.63	1.63	0.57
882.0	7.60	319.20	880.6	6.2	-11.0	12.2	1.96	1.91	3.53
913.0	8.30	318.30	911.3	9.5	-13.9	16.5	2.29	2.26	-2.90
945.0	8.90	320.30	942.9	13.1	-17.0	21.3	2.09	1.88	6.25
977.0	9.60	317.50	974.5	17.0	-20.4	26.4	2.60	2.19	-8.75
1,009.0	10.10	316.70	1,006.0	21.0	-24.1	31.9	1.62	1.56	-2.50
1,041.0	10.50	317.70	1,037.5	25.2	-28.0	37.6	1.37	1.25	3.13
1,072.0	10.80	315.50	1,068.0	29.3	-31.9	43.3	1.63	0.97	-7.10
1,104.0	11.25	316.05	1,099.4	33.7	-36.2	49.4	1.44	1.41	1.72
1,136.0	11.87	316.27	1,130.7	38.3	-40.6	55.8	1.94	1.94	0.69
1,167.0	12.22	317.50	1,161.1	43.1	-45.0	62.3	1.40	1.13	3.97
1,198.0	12.30	317.60	1,191.3	47.9	-49.5	68.9	0.27	0.26	0.32
1,230.0	12.50	317.50	1,222.6	53.0	-54.1	75.7	0.63	0.63	-0.31
1,261.0	12.61	317.96	1,252.9	58.0	-58.7	82.5	0.48	0.35	1.48
1,293.0	12.57	315.35	1,284.1	63.0	-63.4	89.4	1.78	-0.13	-8.16
1,324.0	12.70	313.90	1,314.3	67.8	-68.3	96.2	1.11	0.42	-4.68
1,356.0	12.79	313.90	1,345.5	72.7	-73.4	103.3	0.28	0.28	0.00
1,388.0	12.83	313.63	1,376.8	77.6	-78.5	110.4	0.22	0.13	-0.84
1,420.0	12.83	314.07	1,408.0	82.5	-83.6	117.5	0.31	0.00	1.38
1,451.0	12.83	314.73	1,438.2	87.3	-88.5	124.4	0.47	0.00	2.13
1,483.0	12.88	314.38	1,469.4	92.3	-93.6	131.5	0.29	0.16	-1.09
1,515.0	12.92	314.73	1,500.6	97.4	-98.7	138.6	0.27	0.13	1.09
1,546.0	12.96	315.35	1,530.8	102.3	-103.6	145.6	0.47	0.13	2.00
1,578.0	13.00	315.70	1,562.0	107.4	-108.6	152.8	0.28	0.13	1.09
1,610.0	13.01	315.96	1,593.1	112.6	-113.6	160.0	0.19	0.03	0.81
1,642.0	13.18	316.18	1,624.3	117.8	-118.7	167.2	0.55	0.53	0.69
1,673.0	13.27	316.58	1,654.5	122.9	-123.6	174.3	0.41	0.29	1.29
1,705.0	13.30	316.50	1,685.6	128.3	-128.6	181.6	0.11	0.09	-0.25
1,737.0	13.36	314.21	1,716.8	133.5	-133.8	189.0	1.66	0.19	-7.16
1,769.0	13.40	314.80	1,747.9	138.7	-139.1	196.4	0.44	0.13	1.84
1,800.0	13.50	312.90	1,778.1	143.7	-144.3	203.6	1.46	0.32	-6.13
1,832.0	13.60	310.90	1,809.2	148.7	-149.9	211.1	1.50	0.31	-6.25
1,864.0	13.80	309.40	1,840.3	153.6	-155.7	218.7	1.27	0.63	-4.69
1,895.0	13.50	310.70	1,870.4	158.3	-161.3	226.0	1.38	-0.97	4.19
1,927.0	13.10	311.40	1,901.5	163.1	-166.8	233.3	1.35	-1.25	2.19
1,959.0	12.80	311.30	1,932.7	167.9	-172.2	240.5	0.94	-0.94	-0.31
1,990.0	12.80	312.30	1,962.9	172.4	-177.3	247.3	0.71	0.00	3.23
2,022.0	12.50	312.00	1,994.2	177.1	-182.5	254.3	0.96	-0.94	-0.94
2,054.0	12.20	313.00	2,025.4	181.8	-187.6	261.2	1.15	-0.94	3.13
2,085.0	12.20	313.20	2,055.7	186.2	-192.3	267.7	0.14	0.00	0.65
2,117.0	11.90	313.50	2,087.0	190.8	-197.2	274.4	0.96	-0.94	0.94
2,149.0	11.20	312.10	2,118.4	195.2	-201.9	280.8	2.36	-2.19	-4.38
2,180.0	11.20	314.10	2,148.8	199.3	-206.3	286.8	1.25	0.00	6.45
2,212.0	11.30	316.20	2,180.2	203.7	-210.7	293.0	1.32	0.31	6.56
2,244.0	11.30	317.50	2,211.5	208.3	-215.0	299.3	0.80	0.00	4.06
2,276.0	11.50	317.30	2,242.9	212.9	-219.3	305.6	0.64	0.63	-0.63
2,307.0	11.50	317.10	2,273.3	217.5	-223.5	311.8	0.13	0.00	-0.65
2,339.0	11.60	315.30	2,304.6	222.1	-227.9	318.2	1.17	0.31	-5.63
2,370.0	11.80	313.80	2,335.0	226.5	-232.4	324.5	1.17	0.65	-4.84



PayZone Directional Services, LLC.

Survey Report



Company: NEWFIELD EXPLORATION
 Project: USGS Myton SW (UT)
 Site: SECTION 34 T8S, R16E
 Well: H-34-8-16
 Wellbore: Wellbore #1
 Design: Actual

Local Co-ordinate Reference: Well H-34-8-16
 TVD Reference: WELL @ 5636.0ft (Original Well Elev)
 MD Reference: WELL @ 5636.0ft (Original Well Elev)
 North Reference: True
 Survey Calculation Method: Minimum Curvature
 Database: EDM 2003.21 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
2,402.0	11.90	314.10	2,366.3	231.1	-237.1	331.1	0.37	0.31	0.94
2,433.0	12.00	315.30	2,396.6	235.6	-241.7	337.5	0.86	0.32	3.87
2,465.0	12.00	315.50	2,427.9	240.3	-246.4	344.1	0.13	0.00	0.63
2,497.0	11.90	315.70	2,459.2	245.1	-251.0	350.8	0.34	-0.31	0.63
2,528.0	11.80	315.70	2,489.6	249.6	-255.4	357.1	0.32	-0.32	0.00
2,560.0	11.90	315.50	2,520.9	254.3	-260.0	363.7	0.34	0.31	-0.63
2,592.0	12.00	314.60	2,552.2	259.0	-264.7	370.3	0.66	0.31	-2.81
2,623.0	12.00	314.90	2,582.5	263.5	-269.3	376.8	0.20	0.00	0.97
2,655.0	11.70	314.90	2,613.8	268.2	-273.9	383.3	0.94	-0.94	0.00
2,687.0	11.50	314.90	2,645.2	272.7	-278.5	389.8	0.63	-0.63	0.00
2,718.0	11.40	315.30	2,675.6	277.1	-282.8	395.9	0.41	-0.32	1.29
2,750.0	11.60	316.60	2,706.9	281.7	-287.3	402.3	1.02	0.63	4.06
2,782.0	11.50	317.00	2,738.3	286.3	-291.7	408.7	0.40	-0.31	1.25
2,814.0	11.30	316.40	2,769.7	290.9	-296.0	415.0	0.73	-0.63	-1.88
2,845.0	11.20	315.20	2,800.1	295.3	-300.2	421.1	0.82	-0.32	-3.87
2,877.0	10.90	313.90	2,831.5	299.6	-304.6	427.2	1.22	-0.94	-4.06
2,909.0	11.00	314.00	2,862.9	303.8	-309.0	433.3	0.32	0.31	0.31
2,941.0	11.30	315.70	2,894.3	308.2	-313.4	439.5	1.39	0.94	5.31
2,973.0	11.30	318.80	2,925.7	312.8	-317.6	445.7	1.90	0.00	9.69
3,004.0	10.90	320.30	2,956.1	317.3	-321.5	451.7	1.59	-1.29	4.84
3,035.0	11.10	318.30	2,986.5	321.8	-325.3	457.6	1.39	0.65	-6.45
3,067.0	11.70	317.40	3,017.9	326.5	-329.6	463.9	1.96	1.88	-2.81
3,099.0	12.30	317.00	3,049.2	331.4	-334.1	470.5	1.89	1.88	-1.25
3,131.0	12.90	318.20	3,080.4	336.5	-338.8	477.5	2.05	1.88	3.75
3,162.0	13.10	318.40	3,110.6	341.7	-343.4	484.5	0.66	0.65	0.65
3,194.0	13.40	319.00	3,141.8	347.2	-348.3	491.8	1.03	0.94	1.88
3,226.0	13.40	319.30	3,172.9	352.8	-353.1	499.2	0.22	0.00	0.94
3,258.0	13.00	318.30	3,204.0	358.3	-357.9	506.5	1.44	-1.25	-3.13
3,290.0	12.70	317.20	3,235.2	363.6	-362.7	513.6	1.21	-0.94	-3.44
3,321.0	12.60	317.20	3,265.5	368.6	-367.3	520.4	0.32	-0.32	0.00
3,353.0	12.80	318.10	3,296.7	373.8	-372.1	527.4	0.88	0.63	2.81
3,385.0	12.80	317.70	3,327.9	379.0	-376.8	534.5	0.28	0.00	-1.25
3,417.0	12.40	316.70	3,359.1	384.2	-381.6	541.5	1.42	-1.25	-3.13
3,448.0	12.00	314.40	3,389.4	388.8	-386.2	548.0	2.03	-1.29	-7.42
3,480.0	12.00	312.80	3,420.7	393.4	-391.0	554.7	1.04	0.00	-5.00
3,512.0	12.30	313.80	3,452.0	398.0	-395.9	561.4	1.15	0.94	3.13
3,543.0	12.50	314.80	3,482.3	402.7	-400.6	568.0	0.95	0.65	3.23
3,575.0	12.70	315.00	3,513.5	407.6	-405.6	575.0	0.64	0.63	0.63
3,608.0	12.40	314.40	3,545.7	412.7	-410.7	582.2	0.99	-0.91	-1.82
3,638.0	12.30	312.90	3,575.1	417.1	-415.3	588.6	1.12	-0.33	-5.00
3,670.0	12.20	312.40	3,606.3	421.7	-420.3	595.4	0.46	-0.31	-1.56
3,702.0	12.20	312.20	3,637.6	426.2	-425.3	602.2	0.13	0.00	-0.63
3,734.0	12.20	311.40	3,668.9	430.8	-430.4	608.9	0.53	0.00	-2.50
3,765.0	12.00	312.00	3,699.2	435.1	-435.2	615.4	0.76	-0.65	1.94
3,797.0	12.10	314.90	3,730.5	439.7	-440.1	622.1	1.92	0.31	9.06
3,828.0	12.00	315.30	3,760.8	444.3	-444.6	628.5	0.42	-0.32	1.29
3,860.0	11.80	314.20	3,792.1	448.9	-449.3	635.1	0.94	-0.63	-3.44
3,892.0	11.60	314.00	3,823.4	453.4	-454.0	641.6	0.64	-0.63	-0.63
3,923.0	11.60	313.40	3,853.8	457.7	-458.5	647.9	0.39	0.00	-1.94
3,955.0	11.90	314.30	3,885.1	462.2	-463.2	654.4	1.10	0.94	2.81
3,988.0	12.00	315.30	3,917.4	467.1	-468.0	661.2	0.70	0.30	3.03
4,019.0	11.60	315.30	3,947.8	471.6	-472.5	667.5	1.29	-1.29	0.00
4,051.0	11.30	316.10	3,979.1	476.1	-476.9	673.9	1.06	-0.94	2.50
4,083.0	11.00	316.30	4,010.5	480.6	-481.2	680.1	0.95	-0.94	0.63



PayZone Directional Services, LLC.

Survey Report



Company: NEWFIELD EXPLORATION
 Project: USGS Myton SW (UT)
 Site: SECTION 34 T8S, R16E
 Well: H-34-8-16
 Wellbore: Wellbore #1
 Design: Actual

Local Co-ordinate Reference: Well H-34-8-16
 TVD Reference: WELL @ 5636.0ft (Original Well Elev)
 MD Reference: WELL @ 5636.0ft (Original Well Elev)
 North Reference: True
 Survey Calculation Method: Minimum Curvature
 Database: EDM 2003.21 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N-S (ft)	+E-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,114.0	10.90	316.20	4,041.0	484.8	-485.3	686.0	0.33	-0.32	-0.32
4,146.0	11.00	316.70	4,072.4	489.2	-489.5	692.0	0.43	0.31	1.56
4,178.0	11.00	318.00	4,103.8	493.7	-493.6	698.1	0.78	0.00	4.06
4,209.0	11.30	316.90	4,134.2	498.1	-497.7	704.1	1.19	0.97	-3.55
4,241.0	11.40	316.70	4,165.6	502.7	-502.0	710.4	0.34	0.31	-0.63
4,273.0	11.20	316.40	4,197.0	507.3	-506.3	716.7	0.65	-0.63	-0.94
4,304.0	11.30	315.50	4,227.4	511.6	-510.5	722.7	0.65	0.32	-2.90
4,336.0	11.40	314.70	4,258.7	516.1	-514.9	729.0	0.58	0.31	-2.50
4,368.0	11.60	314.70	4,290.1	520.6	-519.5	735.4	0.63	0.63	0.00
4,399.0	11.80	315.60	4,320.5	525.0	-523.9	741.7	0.87	0.65	2.90
4,431.0	11.70	316.20	4,351.8	529.7	-528.4	748.2	0.49	-0.31	1.88
4,462.0	12.00	315.20	4,382.1	534.3	-532.9	754.6	1.17	0.97	-3.23
4,494.0	11.80	315.00	4,413.4	538.9	-537.5	761.2	0.64	-0.63	-0.63
4,526.0	11.60	314.70	4,444.8	543.5	-542.1	767.7	0.65	-0.63	-0.94
4,557.0	11.40	313.10	4,475.2	547.8	-546.6	773.9	1.21	-0.65	-5.16
4,589.0	11.40	313.20	4,506.5	552.1	-551.2	780.2	0.06	0.00	0.31
4,621.0	11.60	315.00	4,537.9	556.6	-555.8	786.6	1.28	0.63	5.63
4,652.0	12.10	315.00	4,568.2	561.1	-560.3	792.9	1.61	1.61	0.00
4,684.0	12.20	314.70	4,599.5	565.8	-565.1	799.7	0.37	0.31	-0.94
4,716.0	11.80	312.90	4,630.8	570.4	-569.9	806.3	1.71	-1.25	-5.63
4,747.0	11.70	311.30	4,661.2	574.7	-574.6	812.6	1.10	-0.32	-5.16
4,779.0	11.80	311.00	4,692.5	578.9	-579.5	819.1	0.37	0.31	-0.94
4,811.0	11.76	311.92	4,723.8	583.3	-584.4	825.6	0.60	-0.13	2.88
4,843.0	11.82	312.71	4,755.1	587.7	-589.2	832.2	0.54	0.19	2.47
4,875.0	12.10	314.50	4,786.4	592.2	-594.0	838.8	1.45	0.88	5.59
4,906.0	11.80	315.80	4,816.8	596.8	-598.5	845.2	1.30	-0.97	4.19
4,938.0	11.70	316.40	4,848.1	601.5	-603.0	851.7	0.49	-0.31	1.88
4,969.0	11.90	316.10	4,878.4	606.1	-607.4	858.1	0.67	0.65	-0.97
5,001.0	12.00	315.20	4,909.7	610.8	-612.1	864.7	0.66	0.31	-2.81
5,033.0	12.00	315.10	4,941.0	615.5	-616.7	871.3	0.06	0.00	-0.31
5,064.0	11.90	315.50	4,971.4	620.1	-621.3	877.8	0.42	-0.32	1.29
5,096.0	12.00	316.00	5,002.7	624.8	-625.9	884.4	0.45	0.31	1.56
5,128.0	12.00	315.70	5,034.0	629.6	-630.5	891.0	0.19	0.00	-0.94
5,160.0	11.90	314.20	5,065.3	634.3	-635.2	897.7	1.02	-0.31	-4.69
5,191.0	12.00	314.70	5,095.6	638.8	-639.8	904.1	0.46	0.32	1.61
5,223.0	11.40	312.10	5,127.0	643.2	-644.5	910.6	2.50	-1.88	-8.13
5,255.0	10.90	313.90	5,158.4	647.5	-649.0	916.8	1.90	-1.56	5.63
5,286.0	10.70	313.80	5,188.8	651.5	-653.2	922.6	0.65	-0.65	-0.32
5,317.0	10.80	315.20	5,219.3	655.5	-657.3	928.3	0.90	0.32	4.52
5,349.0	11.10	316.60	5,250.7	659.9	-661.6	934.4	1.25	0.94	4.38
5,380.0	11.40	317.20	5,281.1	664.3	-665.7	940.5	1.04	0.97	1.94
5,395.0	11.45	317.06	5,295.8	666.5	-667.7	943.4	0.36	0.31	-0.94
H-34-8-16 TGT									
5,412.0	11.50	316.90	5,312.4	669.0	-670.0	946.8	0.36	0.31	-0.93
5,444.0	11.50	316.00	5,343.8	673.6	-674.4	953.2	0.56	0.00	-2.81
5,475.0	11.80	316.10	5,374.2	678.1	-678.8	959.4	0.97	0.97	0.32
5,507.0	11.90	315.40	5,405.5	682.8	-683.4	966.0	0.55	0.31	-2.19
5,539.0	11.54	316.10	5,436.8	687.5	-687.9	972.5	1.21	-1.13	2.19
5,571.0	11.40	316.80	5,468.2	692.1	-692.3	978.9	0.62	-0.44	2.19
5,603.0	11.50	316.50	5,499.5	696.7	-696.6	985.2	0.36	0.31	-0.94
5,634.0	11.40	315.90	5,529.9	701.1	-700.9	991.4	0.50	-0.32	-1.94
5,666.0	11.30	314.60	5,561.3	705.6	-705.3	997.7	0.86	-0.31	-4.06
5,698.0	11.40	315.00	5,592.7	710.0	-709.8	1,004.0	0.40	0.31	1.25
5,730.0	11.10	315.70	5,624.1	714.5	-714.2	1,010.2	1.03	-0.94	2.19



PayZone Directional Services, LLC.

Survey Report



Company: NEWFIELD EXPLORATION
Project: USGS Myton SW (UT)
Site: SECTION 34 T8S, R16E
Well: H-34-8-16
Wellbore: Wellbore #1
Design: Actual

Local Co-ordinate Reference: Well H-34-8-16
TVD Reference: WELL @ 5636.0ft (Original Well Elev)
MD Reference: WELL @ 5636.0ft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.21 Single User Db

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N-S (ft)	+E-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,761.0	10.44	317.70	5,654.5	718.7	-718.2	1,016.0	2.45	-2.13	6.45
5,793.0	10.11	316.00	5,686.0	722.9	-722.1	1,021.7	1.40	-1.03	-5.31
5,825.0	10.50	311.70	5,717.5	726.8	-726.2	1,027.4	2.69	1.22	-13.44
5,857.0	11.20	310.40	5,748.9	730.8	-730.7	1,033.4	2.32	2.19	-4.06
5,889.0	12.17	311.40	5,780.2	735.0	-735.6	1,039.9	3.10	3.03	3.13
5,920.0	12.40	313.80	5,810.5	739.5	-740.5	1,046.5	1.81	0.74	7.74
5,952.0	12.48	318.30	5,841.8	744.4	-745.3	1,053.4	3.04	0.25	14.06
5,983.0	11.74	320.20	5,872.1	749.4	-749.5	1,059.9	2.71	-2.39	6.13
6,015.0	10.83	321.40	5,903.5	754.2	-753.5	1,066.1	2.94	-2.84	3.75
6,047.0	11.29	321.30	5,934.9	759.0	-757.3	1,072.2	1.44	1.44	-0.31
6,078.0	11.90	318.30	5,965.2	763.8	-761.3	1,078.4	2.77	1.97	-9.68
6,110.0	12.00	316.70	5,996.6	768.7	-765.8	1,085.0	1.08	0.31	-5.00
6,142.0	11.50	316.70	6,027.9	773.4	-770.3	1,091.5	1.56	-1.56	0.00
6,173.0	10.90	315.44	6,058.3	777.7	-774.4	1,097.6	2.09	-1.94	-4.06
6,205.0	10.30	315.30	6,089.7	781.9	-778.6	1,103.4	1.88	-1.88	-0.44
6,237.0	10.37	314.12	6,121.2	786.0	-782.7	1,109.2	0.70	0.22	-3.69
6,268.0	10.51	312.71	6,151.7	789.8	-786.7	1,114.8	0.94	0.45	-4.55
6,300.0	10.94	313.00	6,183.2	793.9	-791.1	1,120.7	1.35	1.34	0.91
6,332.0	11.25	314.51	6,214.6	798.1	-795.6	1,126.9	1.33	0.97	4.72
6,364.0	11.00	315.20	6,246.0	802.5	-799.9	1,133.1	0.89	-0.78	2.16
6,395.0	10.50	313.68	6,276.4	806.5	-804.1	1,138.9	1.85	-1.61	-4.90
6,427.0	9.71	312.10	6,307.9	810.4	-808.2	1,144.5	2.62	-2.47	-4.94
6,459.0	9.14	311.91	6,339.5	813.9	-812.1	1,149.7	1.78	-1.78	-0.59
6,491.0	8.17	312.49	6,371.1	817.1	-815.6	1,154.5	3.04	-3.03	1.81
6,522.0	7.94	310.59	6,401.8	820.0	-818.9	1,158.8	1.13	-0.74	-6.13
6,554.0	7.50	311.00	6,433.5	822.8	-822.1	1,163.1	1.39	-1.38	1.28
6,583.0	6.81	308.14	6,462.3	825.1	-824.9	1,166.7	2.68	-2.38	-9.86
6,635.0	6.81	308.14	6,513.9	828.9	-829.8	1,172.9	0.00	0.00	0.00
6,645.0	6.81	308.14	6,523.9	829.6	-830.7	1,174.0	0.00	0.00	0.00

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N-S (ft)	+E-W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude
H-34-8-16 TGT	0.00	0.00	5,300.0	651.2	-653.5	7,200,174.09	2,030,564.83	40° 4' 40.775 N	110° 6' 20.347 W
- hit/miss target									
- Shape									
- actual wellpath misses by 21.3ft at 5395.0ft MD (5295.8 TVD, 666.5 N, -667.7 E)									
- Circle (radius 75.0)									

Checked By: _____ Approved By: _____ Date: _____

NEWFIELD





Project: USGS Myton SW (UT)
 Site: SECTION 34 T8S, R16E
 Well: H-34-8-16
 Wellbore: Wellbore #1
 SURVEY: Actual

FINAL SURVEY REPORT



Azimuths to True North
 Magnetic North: 11.51°

Magnetic Field
 Strength: 52460.2snT
 Dip Angle: 65.86°
 Date: 2009/12/15
 Model: IGRF200510

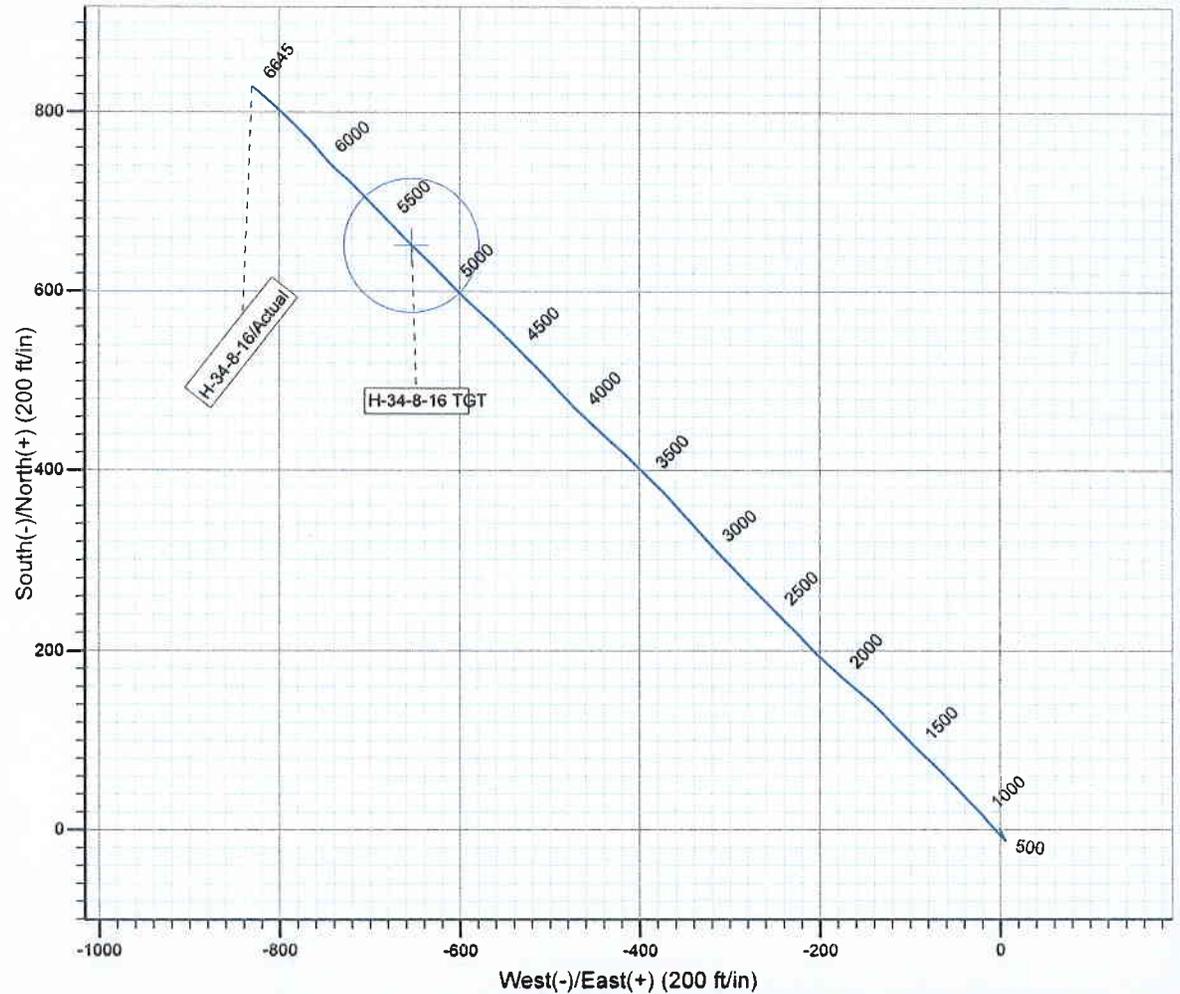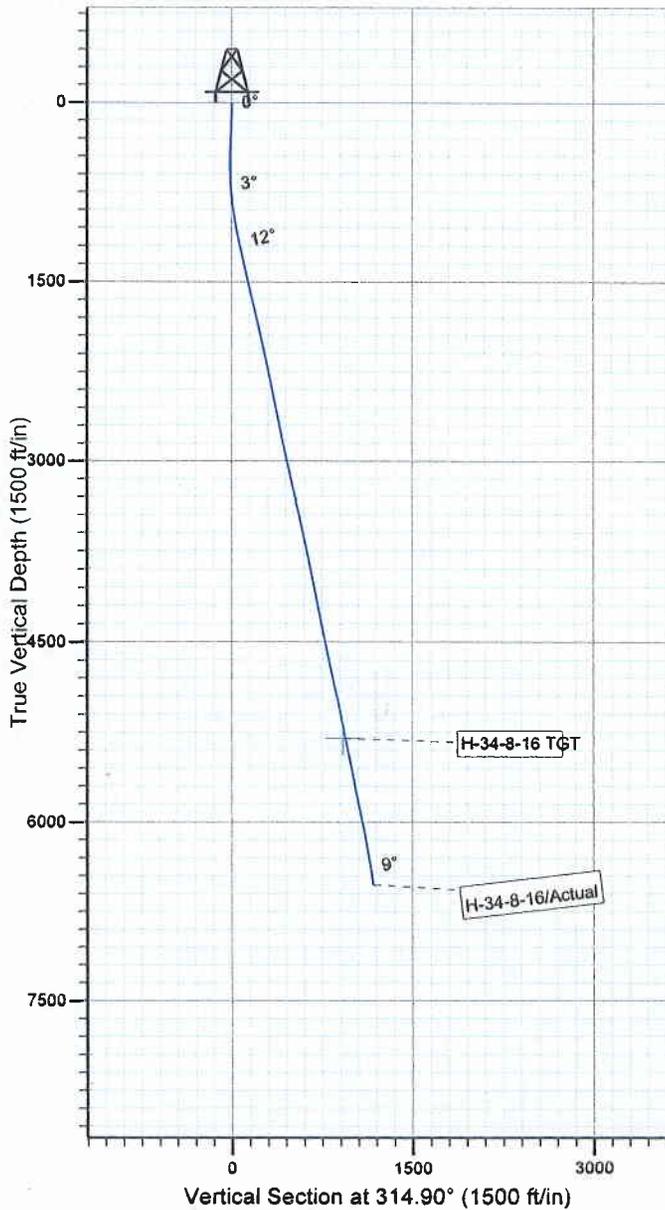

Design: Actual (H-34-8-16/Wellbore #1)



Created By: *Tom Hudson* Date: 19:57, January 07 2011
 THIS SURVEY IS CORRECT TO THE BEST OF MY
 KNOWLEDGE AND IS SUPPORTED BY ACTUAL FIELD DATA.

Daily Activity Report**Format For Sundry****MON BUTTE H-34-8-16****10/1/2010 To 2/28/2011****MON BUTTE H-34-8-16****Waiting on Cement****Date:** 12/20/2010

Ross #21 at 310. Days Since Spud - BJ Cemented 8 5/8" Casing W/ 160sks Class "G"+2% CaCl+.25#/SK CelloFlake Mixed @ 15.8ppg - Ran 7jts 8 5/8" Casing (Guide Shoe, Shoe Joint, Baffle Plate, 6jts) set @ 307.90KB. On 12/15/10 - On 12/10/10 Ross # 29 Spud the Greater Monument Butte H-34-8-16, Drilled 310' of 12 1/4" hole - 1.17yield returned 6.5bbls to pit.

Daily Cost: \$0**Cumulative Cost:** \$46,656**MON BUTTE H-34-8-16****Rigging Up****Date:** 1/3/2011

NDSI #2 at 310. 0 Days Since Spud - Rig Down Prepair For Move To H-35-8-16

Daily Cost: \$0**Cumulative Cost:** \$54,506**MON BUTTE H-34-8-16****Drill 7 7/8" hole with fresh water****Date:** 1/4/2011

NDSI #2 at 536. 1 Days Since Spud - Clean Up Rig Thaw Water Hoses - 2000# psi For 10 Mins.Test Surface Casing To 1500# psi For 30 Mins. Everything Tested OK. - R/U B&C Quick Test,Test Upper Kelly Valve,Safety Valve,Pipe Rams,Blind Rams,Choke Line & Manifold To - MIRU,Set Surface Equipment,With Marcus Liddell Trucking.(Move 15' From M-34-8-16) - P/U Directional Tools & BHA As Follows,Huges 7 7/8" Q506F PDC Bit, Hunting 7/8 Lobe,4.8 Stage, - .33 Rev 1.5 Degree Mud Motor, 1x30' Monel DC,1x3' Double Gap Sub,1x2' Index Sub, 1x5' NM Pony,14HWDP - Boiler 14 Hrs. - No H2s Reported - Fix Dog Nut,Thaw Out Stand Pipe & Kelly,Repair Air Line On Kelly Spinners. - Drill From 265' To 536'

Daily Cost: \$0**Cumulative Cost:** \$106,869**MON BUTTE H-34-8-16****Drill 7 7/8" hole with fresh water****Date:** 1/5/2011

NDSI #2 at 2930. 2 Days Since Spud - No H2s Reported Last 24 HRS. - Drill 7 7/8" Hole From 1187' To 2930', WOB 18,000 lbs,TRPM 168, GPM 344, AVG ROP 99.6 fph - Rig Service, Function Test Bop's, Check Crown-A-Matic. - Drill 7 7/8" Hole From 536' To 1187', WOB 15,000 lbs,TRPM 168, GPM 344, AVG ROP 108.5 fph - Boiler 24 Hrs

Daily Cost: \$0**Cumulative Cost:** \$126,678**MON BUTTE H-34-8-16****Drill 7 7/8" hole with fresh water****Date:** 1/6/2011

NDSI #2 at 4546. 3 Days Since Spud - No H2s Reported Last 24 Hrs - Drill 7 7/8" Hole From 3976' To 4546, WOB 18,000 lbs, TRPM 168,GPM 344, AVG ROP 63.3 fph - Change Out Light Plant (Throwing Oil Out Rear Seal) Work On Pason Equipment. - Drill 7 7/8" Hole From 3659' To 3976' WOB 15,000 lbs,TRPM 168, GPM 344, AVG ROP 88 fph - Drill 7 7/8" Hole From 3564' To 3659' WOB 15,000 WOB,TRPM 168,GPM 344, AVG ROP 95 fph - Frozen And Broken Water Lines) - Rig Service,Check Crown-A-Matic,Function Test Bop's, (Change Out Directional Drillers House Due To - Drill 7 7/8" Hole From 2930' To 3564',WOB 15,000 lbs,TRPM 168, GPM

344,AVG ROP 97.5 fph - Work On Pason Equipment

Daily Cost: \$0

Cumulative Cost: \$146,487

MON BUTTE H-34-8-16

Drill 7 7/8" hole with fresh water

Date: 1/7/2011

NDSI #2 at 6130. 4 Days Since Spud - Drill 7 7/8" Hole From 5275' to 6130', WOB 18,000 lbs, TRPM 168,GPM 344, AVG ROP 83.3 fph - Rig Service, Function Test BOP and Crown-O-Matic Grease Crown, Kelly, Swivel, and Spinners - Drill 7 7/8" Hole From 4546' to 5275', WOB 18,000 lbs, TRPM 168,GPM 344, AVG ROP 83.3 fph

Daily Cost: \$0

Cumulative Cost: \$166,506

MON BUTTE H-34-8-16

Drill 7 7/8" hole with fresh water

Date: 1/8/2011

NDSI #2 at 6645. 5 Days Since Spud - Laydown Drill Pipe and BHA - Pump 360bbls Brine - Laydown Pipe to 4,000' - Circulate F/ Laydown - Rig up PSI and Log Well F/ Logger TD (6630') to Surface - Rig up B&C Quick Test and Pressure Test 5 1/2" Casing Rams to 2,000PSI F/ 10min tested good - Rig up Marcus Liddell Casing Crew and Run 157jts J-55 15.5# LTC Casing - Drill 7 7/8" Hole From 6130' to 6635', WOB 18,000 lbs, TRPM 168,GPM 344, AVG ROP 75fph

Daily Cost: \$0

Cumulative Cost: \$236,252

MON BUTTE H-34-8-16

Wait on Completion

Date: 1/9/2011

NDSI #2 at 6645. 6 Days Since Spud - Clean Mud Tanks - Nipple down BOP and set slips W/ 87,000 tension - Mixed @ 14.4ppg W/ 1.24 yield Returned 57bbls to pit - 11ppg W/ 3.53 yield. Pumped 425skts Tail Cmt.50:50:2+3%KCL+0.5%EC-1+.25#CF+.05#SF+.3SMS+FP-6L - Cement W/ 300skts of lead Cmt.PL11+3%KCL+5#CSE+0.5#CF+2#KCL+.5SMS+FP+SF Mixed @ - Rig up BJ hardlines and Circulate W/ Rig Pump - Run 157jts 5 1/2" J-55 LTC Casing set @ 6635.32'KB - Release Rig @ 3:30PM 1/8/11 **Finalized**

Daily Cost: \$0

Cumulative Cost: \$352,938

Pertinent Files: [Go to File List](#)