

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL		1. WELL NAME and NUMBER Greater Monument Butte O-25-8-16
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>		3. FIELD OR WILDCAT MONUMENT BUTTE
4. TYPE OF WELL Oil Well Coalbed Methane Well: NO		5. UNIT or COMMUNITIZATION AGREEMENT NAME GMBU (GRRV)
6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY		7. OPERATOR PHONE 435 646-4825
8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Myton, UT, 84052		9. OPERATOR E-MAIL mcrozier@newfield.com
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UTU-73088	11. MINERAL OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>	
13. NAME OF SURFACE OWNER (if box 12 = 'fee')		12. SURFACE OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')		14. SURFACE OWNER PHONE (if box 12 = 'fee')
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')		16. SURFACE OWNER E-MAIL (if box 12 = 'fee')
18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>		19. SLANT VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>

20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN
LOCATION AT SURFACE	1928 FNL 680 FEL	SENE	26	8.0 S	16.0 E	S
Top of Uppermost Producing Zone	2374 FNL 228 FEL	SENE	26	8.0 S	16.0 E	S
At Total Depth	2630 FNL 10 FWL	SWNW	25	8.0 S	16.0 E	S

21. COUNTY DUCHESNE	22. DISTANCE TO NEAREST LEASE LINE (Feet) 10	23. NUMBER OF ACRES IN DRILLING UNIT 20
	25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 1404	26. PROPOSED DEPTH MD: 6624 TVD: 6624
27. ELEVATION - GROUND LEVEL 5478	28. BOND NUMBER WYB000493	29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 43-7478

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)	<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)	<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP

NAME Mandie Crozier	TITLE Regulatory Tech	PHONE 435 646-4825
SIGNATURE	DATE 01/27/2010	EMAIL mcrozier@newfield.com
API NUMBER ASSIGNED 43013502360000	APPROVAL  Permit Manager	

Proposed Hole, Casing, and Cement


String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Prod	7.875	5.5	0	6624		
Pipe	Grade	Length	Weight			
	Grade J-55 LT&C	6624	15.5			

Proposed Hole, Casing, and Cement


String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Surf	12.25	8.625	0	300		
Pipe	Grade	Length	Weight			
	Grade J-55 ST&C	300	24.0			

T8S, R16E, S.L.B.&M.

NEWFIELD PRODUCTION COMPANY

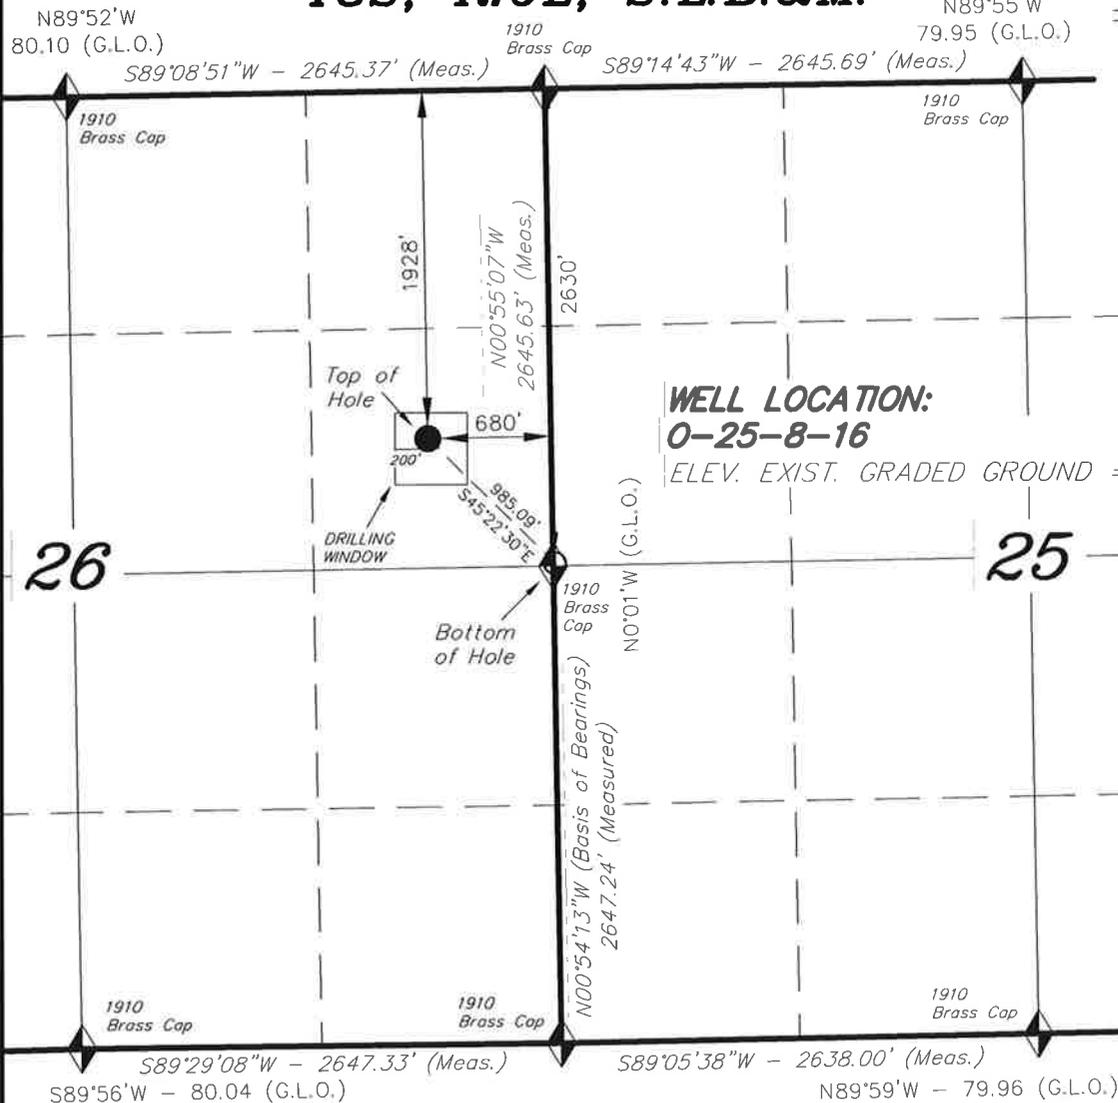

WELL LOCATION, 0-25-8-16, LOCATED AS SHOWN IN THE SE 1/4 NE 1/4 OF SECTION 26, T8S, R16E, S.L.B.&M. DUCHESNE COUNTY, UTAH.

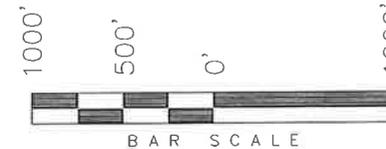


**WELL LOCATION:
0-25-8-16**

ELEV. EXIST. GRADED GROUND = 5478'

Note:

1. The bottom of hole footages are 2630' FNL & 10' FWL of Section 25, T8S, R16E.

THIS IS TO CERTIFY THAT THE ABOVE PLAN WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

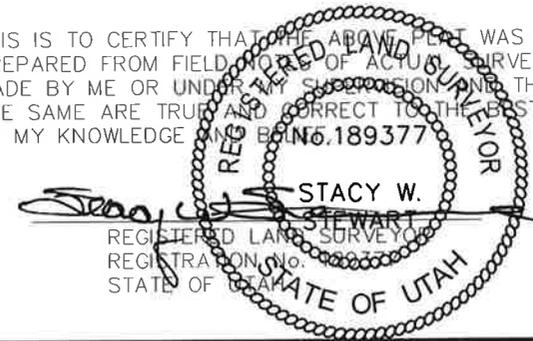

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV; Elevations are base on LOCATION: an N.G.S. OPUS Correction. LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

0-25-8-16
(Surface Location) NAD 83
LATITUDE = 40° 05' 27.13"
LONGITUDE = 110° 04' 46.71"

TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501

DATE SURVEYED: 08-31-09	SURVEYED BY: T.P.
DATE DRAWN: 09-01-09	DRAWN BY: F.T.M.
REVISED: 01-15-10 - M.W.	SCALE: 1" = 1000'





Project: USGS Myton SW (UT)
 Site: SECTION 26 T8S, R16E
 Well: O-25-8-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.53°

Magnetic Field
 Strength: 52494.5snT
 Dip Angle: 65.88°
 Date: 2009/09/22
 Model: IGRF200510

KOP @ 600'
 DOGLEG RATE 1.5 DEG/100'
 TARGET RADIUS IS 75'

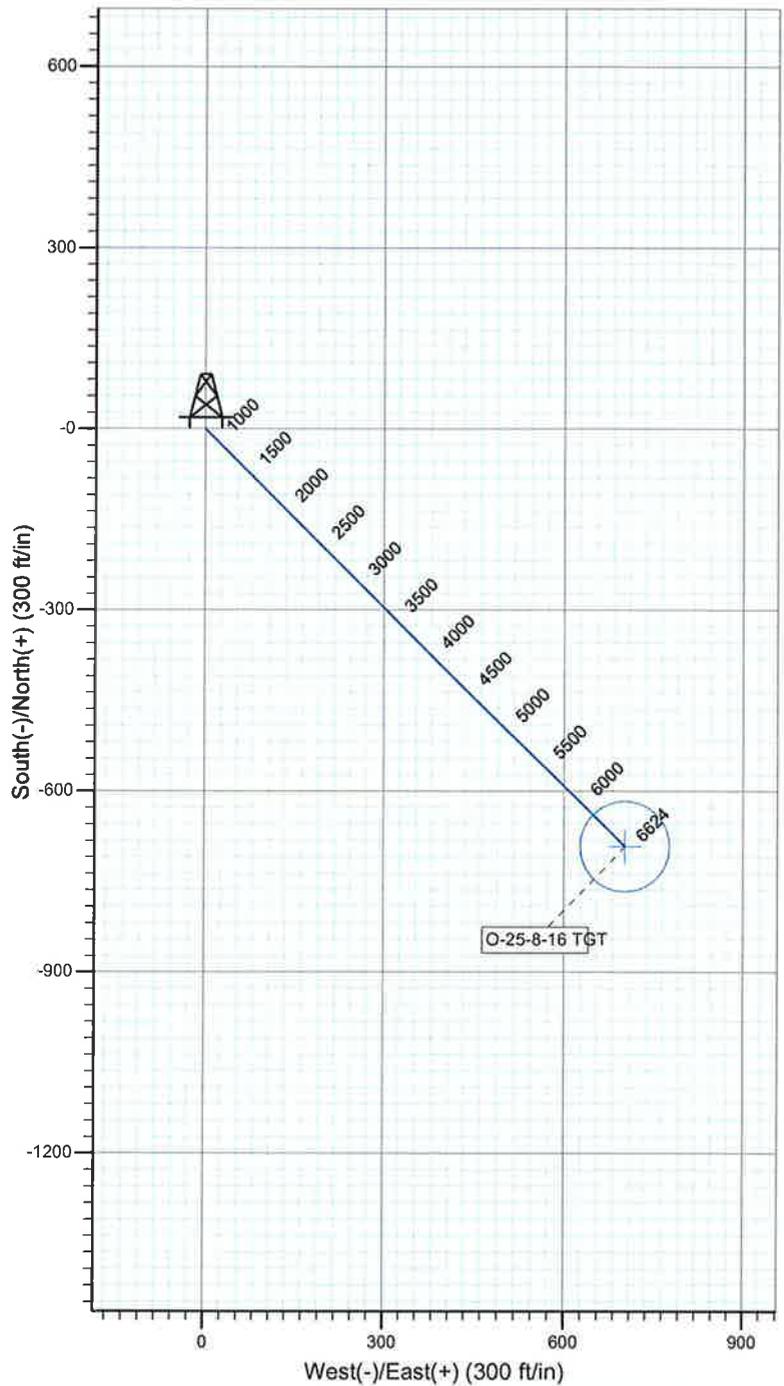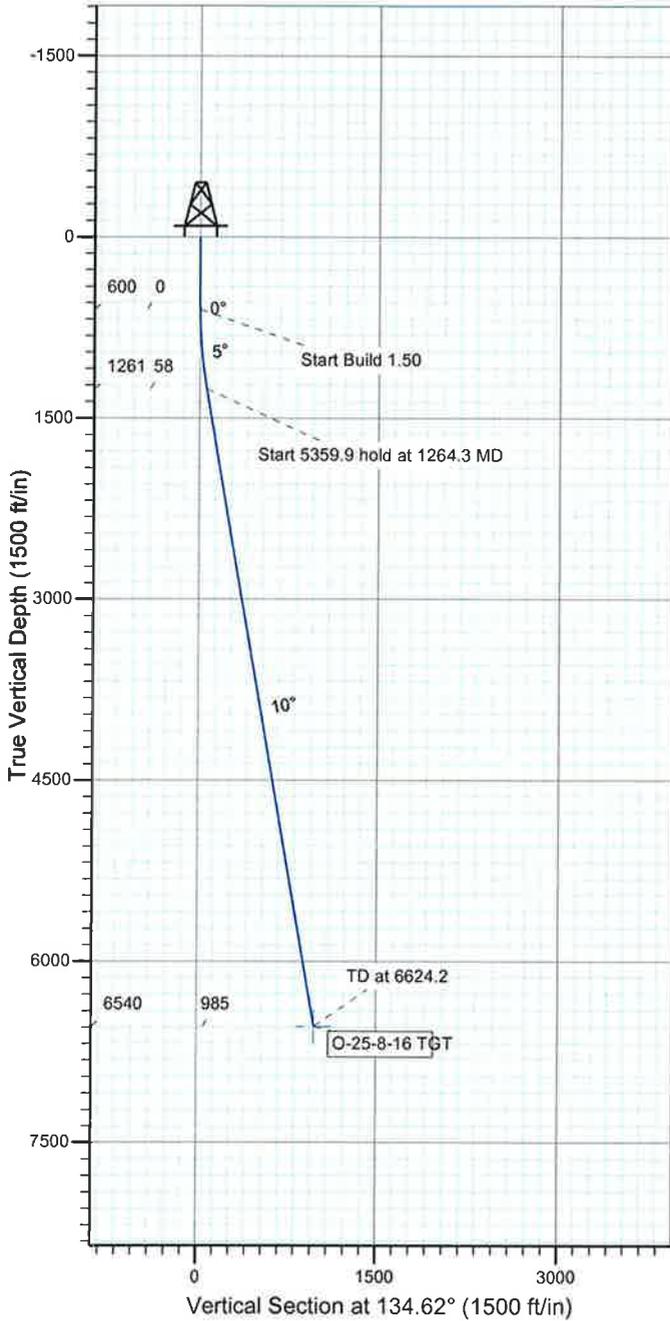

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
O-25-8-16 TGT	6540.0	-691.9	701.2	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1264.3	9.96	134.62	1261.0	-40.5	41.0	1.50	134.62	57.6	
4	6624.2	9.96	134.62	6540.0	-691.9	701.2	0.00	0.00	985.1	O-25-8-16 TGT





NEWFIELD EXPLORATION

**USGS Myton SW (UT)
SECTION 26 T8S, R16E
O-25-8-16**

Wellbore #1

Plan: Design #1

Standard Planning Report

24 November, 2009



HATHAWAY BURNHAM

Planning Report



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well O-25-8-16
Company:	NEWFIELD EXPLORATION	TVD Reference:	O-25-8-16 @ 5490.0ft (Original Well Elev)
Project:	USGS Myton SW (UT)	MD Reference:	O-25-8-16 @ 5490.0ft (Original Well Elev)
Site:	SECTION 26 T8S, R16E	North Reference:	True
Well:	O-25-8-16	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		Using geodetic scale factor

Site SECTION 26 T8S, R16E, SEC 26 T8S R16E			
Site Position:		Northing:	7,204,000.00ft
From:	Lat/Long	Easting:	2,034,000.00ft
Position Uncertainty:	0.0 ft	Slot Radius:	"
		Latitude:	40° 5' 18.051 N
		Longitude:	110° 5' 35.383 W
		Grid Convergence:	0.90 °

Well O-25-8-16, SHL LAT: 40 05 27.13, LONG: -110 04 46.71			
Well Position	+N/-S 918.4 ft	Northing:	7,204,978.27 ft
	+E/-W 3,783.0 ft	Easting:	2,037,767.60 ft
Position Uncertainty	0.0 ft	Wellhead Elevation:	5,490.0 ft
		Latitude:	40° 5' 27.130 N
		Longitude:	110° 4' 46.710 W
		Ground Level:	5,478.0 ft

Wellbore Wellbore #1					
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	2009/09/22	11.53	65.88	52,494

Design Design #1				
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	6,540.0	0.0	0.0	134.62

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,264.3	9.96	134.62	1,261.0	-40.5	41.0	1.50	1.50	0.00	134.62	
6,624.2	9.96	134.62	6,540.0	-691.9	701.2	0.00	0.00	0.00	0.00	O-25-8-16 TGT



HATHAWAY BURNHAM

Planning Report



Database: EDM 2003.21 Single User Db
Company: NEWFIELD EXPLORATION
Project: USGS Myton SW (UT)
Site: SECTION 26 T8S, R16E
Well: O-25-8-16
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well O-25-8-16
TVD Reference: O-25-8-16 @ 5490.0ft (Original Well Elev)
MD Reference: O-25-8-16 @ 5490.0ft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	1.50	134.62	700.0	-0.9	0.9	1.3	1.50	1.50	0.00
800.0	3.00	134.62	799.9	-3.7	3.7	5.2	1.50	1.50	0.00
900.0	4.50	134.62	899.7	-8.3	8.4	11.8	1.50	1.50	0.00
1,000.0	6.00	134.62	999.3	-14.7	14.9	20.9	1.50	1.50	0.00
1,100.0	7.50	134.62	1,098.6	-23.0	23.3	32.7	1.50	1.50	0.00
1,200.0	9.00	134.62	1,197.5	-33.0	33.5	47.0	1.50	1.50	0.00
1,264.3	9.96	134.62	1,261.0	-40.5	41.0	57.6	1.50	1.50	0.00
1,300.0	9.96	134.62	1,296.1	-44.8	45.4	63.8	0.00	0.00	0.00
1,400.0	9.96	134.62	1,394.6	-57.0	57.7	81.1	0.00	0.00	0.00
1,500.0	9.96	134.62	1,493.1	-69.1	70.0	98.4	0.00	0.00	0.00
1,600.0	9.96	134.62	1,591.6	-81.3	82.4	115.7	0.00	0.00	0.00
1,700.0	9.96	134.62	1,690.1	-93.4	94.7	133.0	0.00	0.00	0.00
1,800.0	9.96	134.62	1,788.6	-105.6	107.0	150.3	0.00	0.00	0.00
1,900.0	9.96	134.62	1,887.1	-117.7	119.3	167.6	0.00	0.00	0.00
2,000.0	9.96	134.62	1,985.6	-129.9	131.6	184.9	0.00	0.00	0.00
2,100.0	9.96	134.62	2,084.0	-142.0	143.9	202.2	0.00	0.00	0.00
2,200.0	9.96	134.62	2,182.5	-154.2	156.3	219.5	0.00	0.00	0.00
2,300.0	9.96	134.62	2,281.0	-166.4	168.6	236.8	0.00	0.00	0.00
2,400.0	9.96	134.62	2,379.5	-178.5	180.9	254.1	0.00	0.00	0.00
2,500.0	9.96	134.62	2,478.0	-190.7	193.2	271.4	0.00	0.00	0.00
2,600.0	9.96	134.62	2,576.5	-202.8	205.5	288.7	0.00	0.00	0.00
2,700.0	9.96	134.62	2,675.0	-215.0	217.8	306.1	0.00	0.00	0.00
2,800.0	9.96	134.62	2,773.5	-227.1	230.2	323.4	0.00	0.00	0.00
2,900.0	9.96	134.62	2,872.0	-239.3	242.5	340.7	0.00	0.00	0.00
3,000.0	9.96	134.62	2,970.5	-251.4	254.8	358.0	0.00	0.00	0.00
3,100.0	9.96	134.62	3,069.0	-263.6	267.1	375.3	0.00	0.00	0.00
3,200.0	9.96	134.62	3,167.5	-275.7	279.4	392.6	0.00	0.00	0.00
3,300.0	9.96	134.62	3,265.9	-287.9	291.7	409.9	0.00	0.00	0.00
3,400.0	9.96	134.62	3,364.4	-300.1	304.1	427.2	0.00	0.00	0.00
3,500.0	9.96	134.62	3,462.9	-312.2	316.4	444.5	0.00	0.00	0.00
3,600.0	9.96	134.62	3,561.4	-324.4	328.7	461.8	0.00	0.00	0.00
3,700.0	9.96	134.62	3,659.9	-336.5	341.0	479.1	0.00	0.00	0.00
3,800.0	9.96	134.62	3,758.4	-348.7	353.3	496.4	0.00	0.00	0.00
3,900.0	9.96	134.62	3,856.9	-360.8	365.6	513.7	0.00	0.00	0.00
4,000.0	9.96	134.62	3,955.4	-373.0	378.0	531.0	0.00	0.00	0.00
4,100.0	9.96	134.62	4,053.9	-385.1	390.3	548.3	0.00	0.00	0.00
4,200.0	9.96	134.62	4,152.4	-397.3	402.6	565.6	0.00	0.00	0.00
4,300.0	9.96	134.62	4,250.9	-409.4	414.9	582.9	0.00	0.00	0.00
4,400.0	9.96	134.62	4,349.4	-421.6	427.2	600.2	0.00	0.00	0.00
4,500.0	9.96	134.62	4,447.8	-433.7	439.5	617.5	0.00	0.00	0.00
4,600.0	9.96	134.62	4,546.3	-445.9	451.9	634.8	0.00	0.00	0.00
4,700.0	9.96	134.62	4,644.8	-458.1	464.2	652.1	0.00	0.00	0.00
4,800.0	9.96	134.62	4,743.3	-470.2	476.5	669.4	0.00	0.00	0.00
4,900.0	9.96	134.62	4,841.8	-482.4	488.8	686.7	0.00	0.00	0.00
5,000.0	9.96	134.62	4,940.3	-494.5	501.1	704.0	0.00	0.00	0.00
5,100.0	9.96	134.62	5,038.8	-506.7	513.4	721.3	0.00	0.00	0.00
5,200.0	9.96	134.62	5,137.3	-518.8	525.8	738.6	0.00	0.00	0.00



HATHAWAY BURNHAM
Planning Report



Database: EDM 2003.21 Single User Db
Company: NEWFIELD EXPLORATION
Project: USGS Myton SW (UT)
Site: SECTION 26 T8S, R16E
Well: O-25-8-16
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well O-25-8-16
TVD Reference: O-25-8-16 @ 5490.0ft (Original Well Elev)
MD Reference: O-25-8-16 @ 5490.0ft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,300.0	9.96	134.62	5,235.8	-531.0	538.1	756.0	0.00	0.00	0.00
5,400.0	9.96	134.62	5,334.3	-543.1	550.4	773.3	0.00	0.00	0.00
5,500.0	9.96	134.62	5,432.8	-555.3	562.7	790.6	0.00	0.00	0.00
5,600.0	9.96	134.62	5,531.3	-567.4	575.0	807.9	0.00	0.00	0.00
5,700.0	9.96	134.62	5,629.7	-579.6	587.3	825.2	0.00	0.00	0.00
5,800.0	9.96	134.62	5,728.2	-591.8	599.7	842.5	0.00	0.00	0.00
5,900.0	9.96	134.62	5,826.7	-603.9	612.0	859.8	0.00	0.00	0.00
6,000.0	9.96	134.62	5,925.2	-616.1	624.3	877.1	0.00	0.00	0.00
6,100.0	9.96	134.62	6,023.7	-628.2	636.6	894.4	0.00	0.00	0.00
6,200.0	9.96	134.62	6,122.2	-640.4	648.9	911.7	0.00	0.00	0.00
6,300.0	9.96	134.62	6,220.7	-652.5	661.2	929.0	0.00	0.00	0.00
6,400.0	9.96	134.62	6,319.2	-664.7	673.6	946.3	0.00	0.00	0.00
6,500.0	9.96	134.62	6,417.7	-676.8	685.9	963.6	0.00	0.00	0.00
6,600.0	9.96	134.62	6,516.2	-689.0	698.2	980.9	0.00	0.00	0.00
6,624.2	9.96	134.62	6,540.0	-691.9	701.2	985.1	0.00	0.00	0.00

NEWFIELD PRODUCTION COMPANY
GREATER MONUMENT BUTTE O-25-8-16
AT SURFACE: SE/NE SECTION 26, T8S, R16E
DUCHESNE COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0 – 1800'
Green River	1800'
Wasatch	6624'

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation 1800' – 6624' – Oil

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO ₃) (mg/l)
Dissolved Bicarbonate (NaHCO ₃) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO ₄) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. **Casing Design: Greater Monument Butte O-25-8-16**

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	300'	24.0	J-55	STC	2,950	1,370	244,000
						17.53	14.35	33.89
Prod casing 5-1/2"	0'	6,624'	15.5	J-55	LTC	4,810	4,040	217,000
						2.28	1.92	2.11

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg
 Pore pressure at surface casing shoe = 8.33 ppg
 Pore pressure at prod casing shoe = 8.33 ppg
 Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. **Cementing Design: Greater Monument Butte O-25-8-16**

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft³/sk)
			ft³			
Surface casing	300'	Class G w/ 2% CaCl	138	30%	15.8	1.17
			161			
Prod casing Lead	4,624'	Prem Lite II w/ 10% gel + 3% KCl	319	30%	11.0	3.26
			1042			
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363	30%	14.3	1.24
			451			

- *Actual volume pumped will be 15% over the caliper log
- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
 - Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ±350 feet will be drilled with an air/mist system. The air rig is equipped with a 6 ½" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ±350 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBDT to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated

bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the third quarter of 2010, and take approximately seven (7) days from spud to rig release.

2-M SYSTEM

Blowout Prevention Equipment Systems


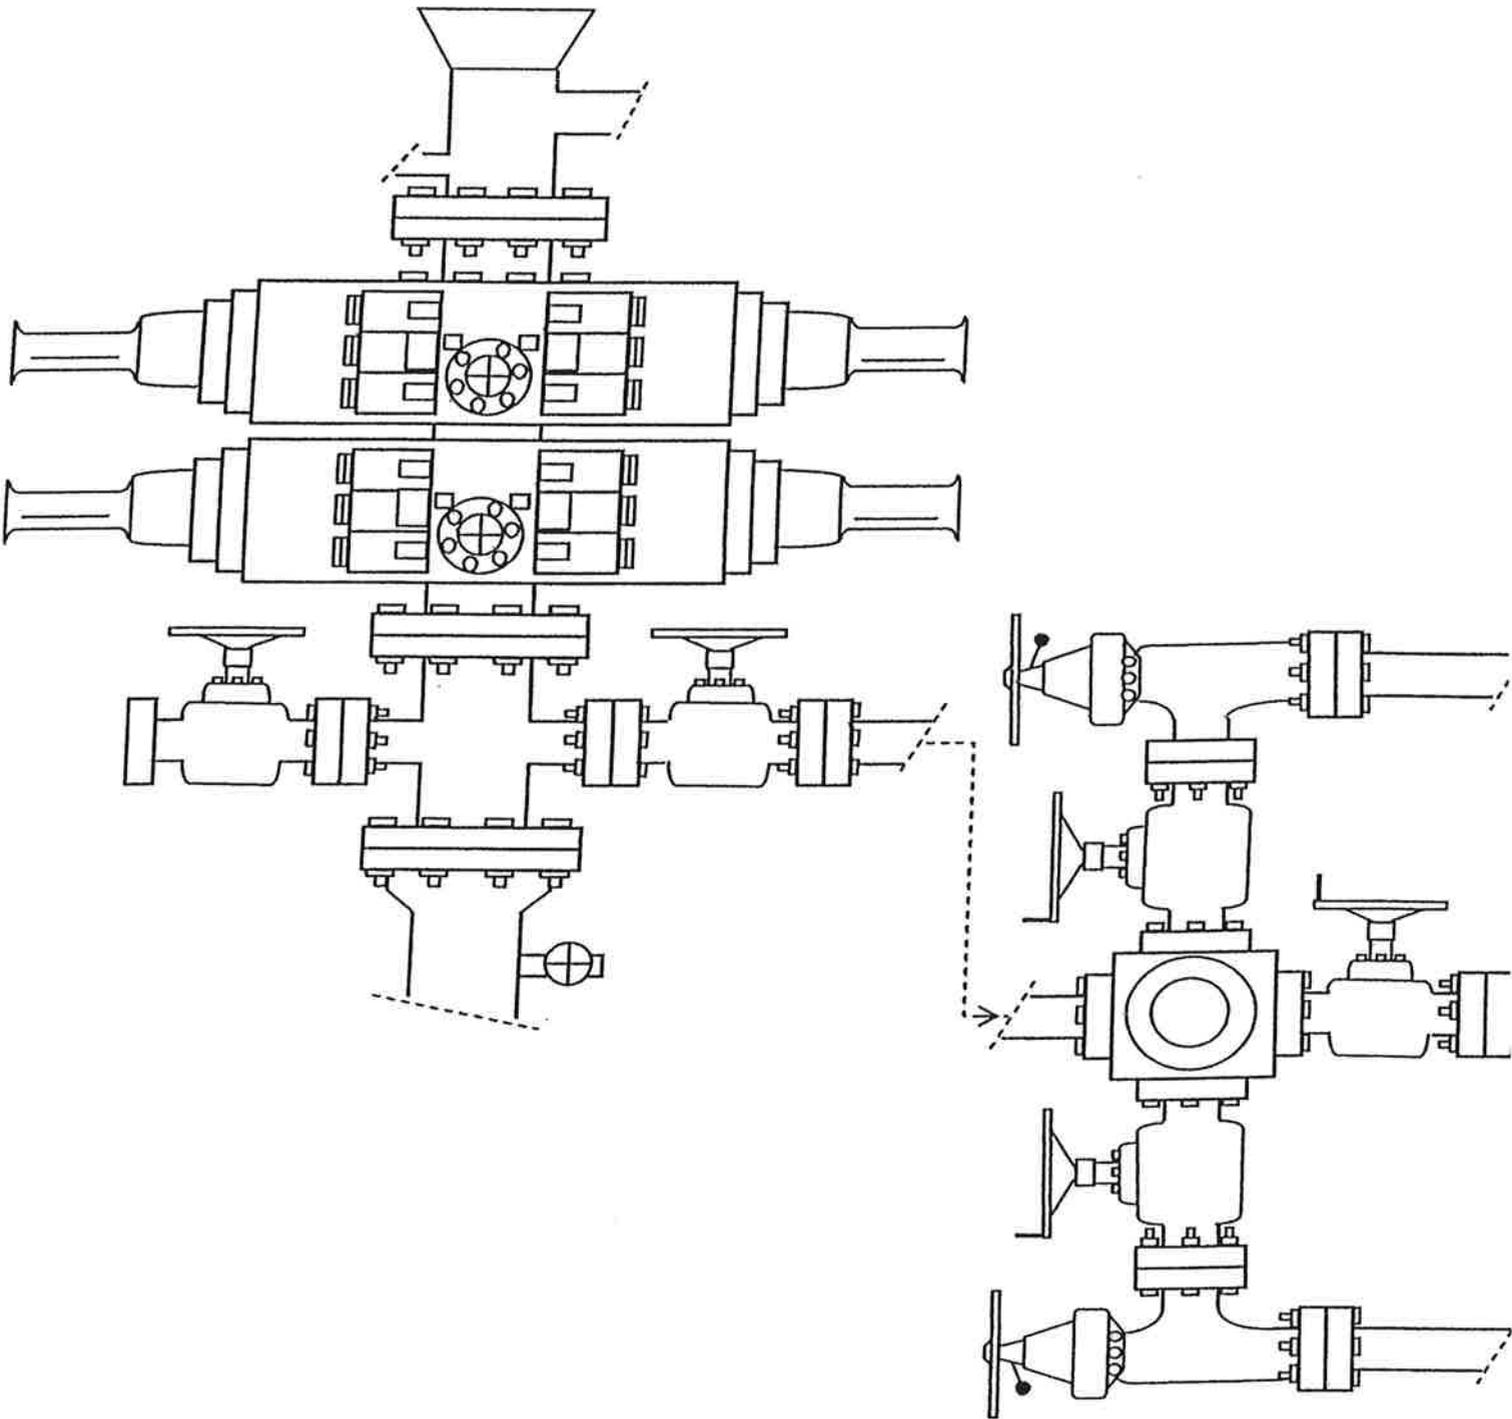


EXHIBIT C



NEWFIELD
Exploration Company

O-25-8-16 (Proposed Well)
I-26-8-16 (Existing Well)
8-26-8-16 (Existing Well)
Pad Location: SENE SEC. 26, T8S, R16E, S.L.B.&M.

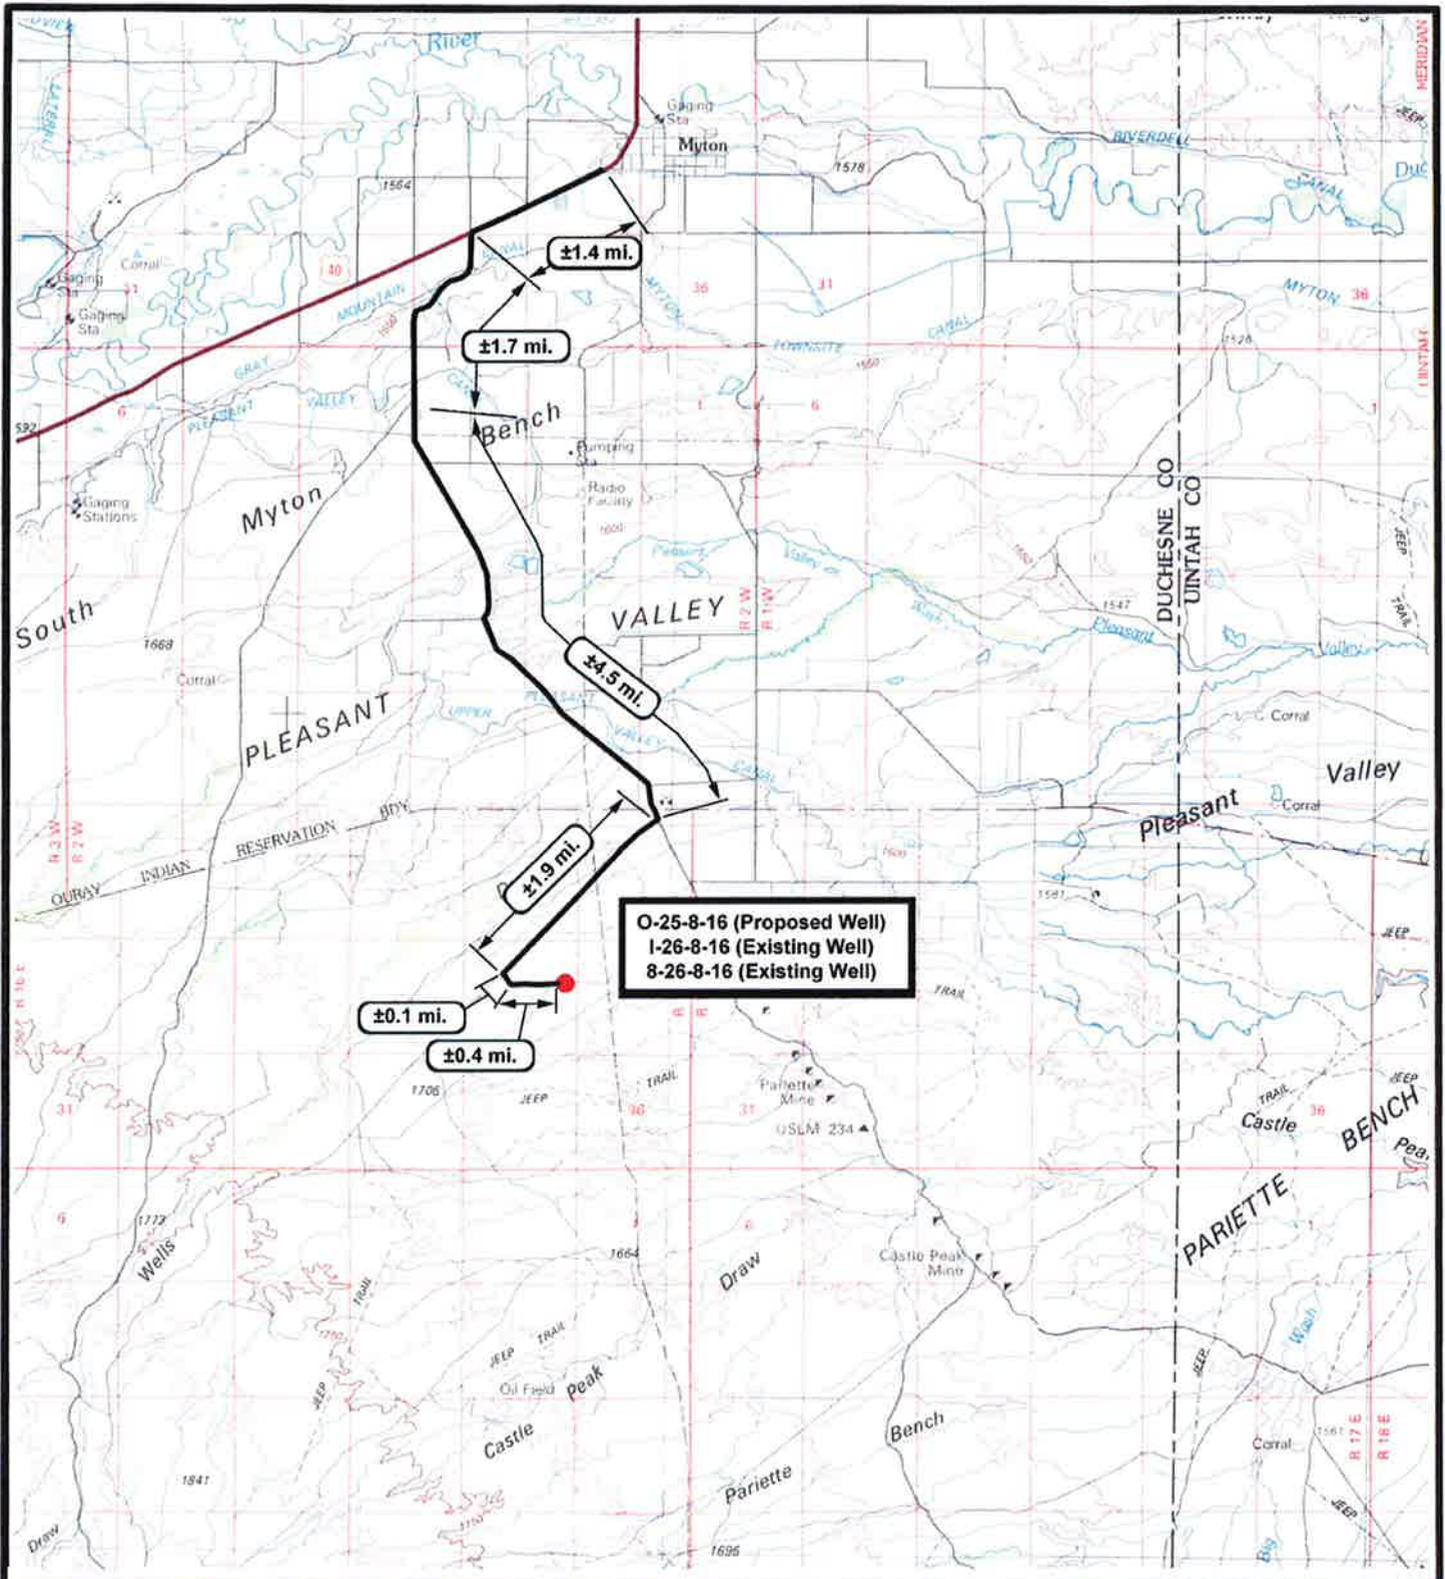


Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1 = 100,000
DRAWN BY: mw
DATE: 01-15-2010

Legend

Existing Road

TOPOGRAPHIC MAP
"A"

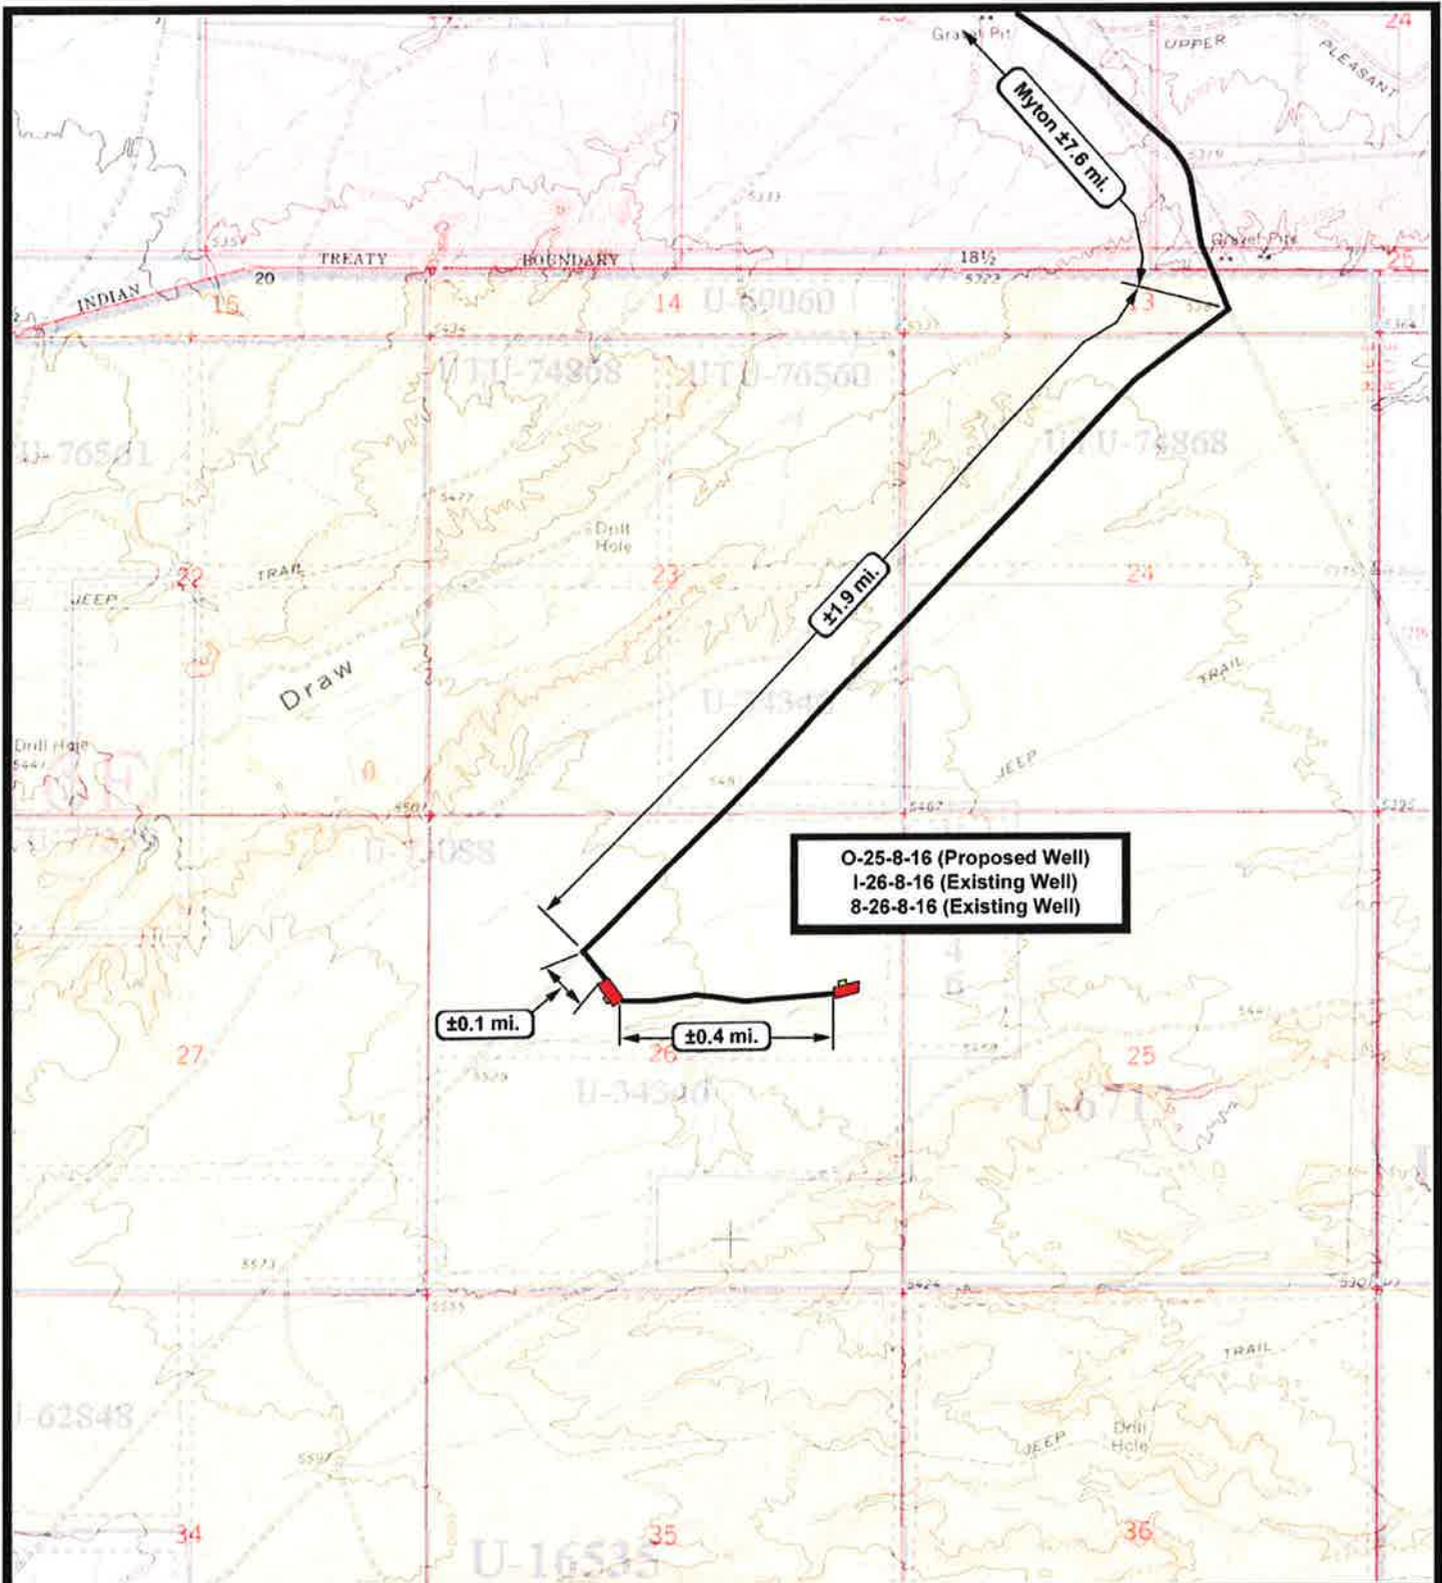

O-25-8-16 (Proposed Well)
 I-26-8-16 (Existing Well)
 8-26-8-16 (Existing Well)

±0.1 mi.

±0.4 mi.

±1.9 mi.

Mylon ±7.6 mi.

NEWFIELD
Exploration Company

O-25-8-16 (Proposed Well)
 I-26-8-16 (Existing Well)
 8-26-8-16 (Existing Well)
 Pad Location: SENE SEC. 26, T8S, R16E, S.L.B.&M.




Tri-State
Land Surveying Inc.
 (435) 781-2501
 180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'
 DRAWN BY: mw
 DATE: 01-15-2010

Legend

Existing Road

TOPOGRAPHIC MAP
"B"

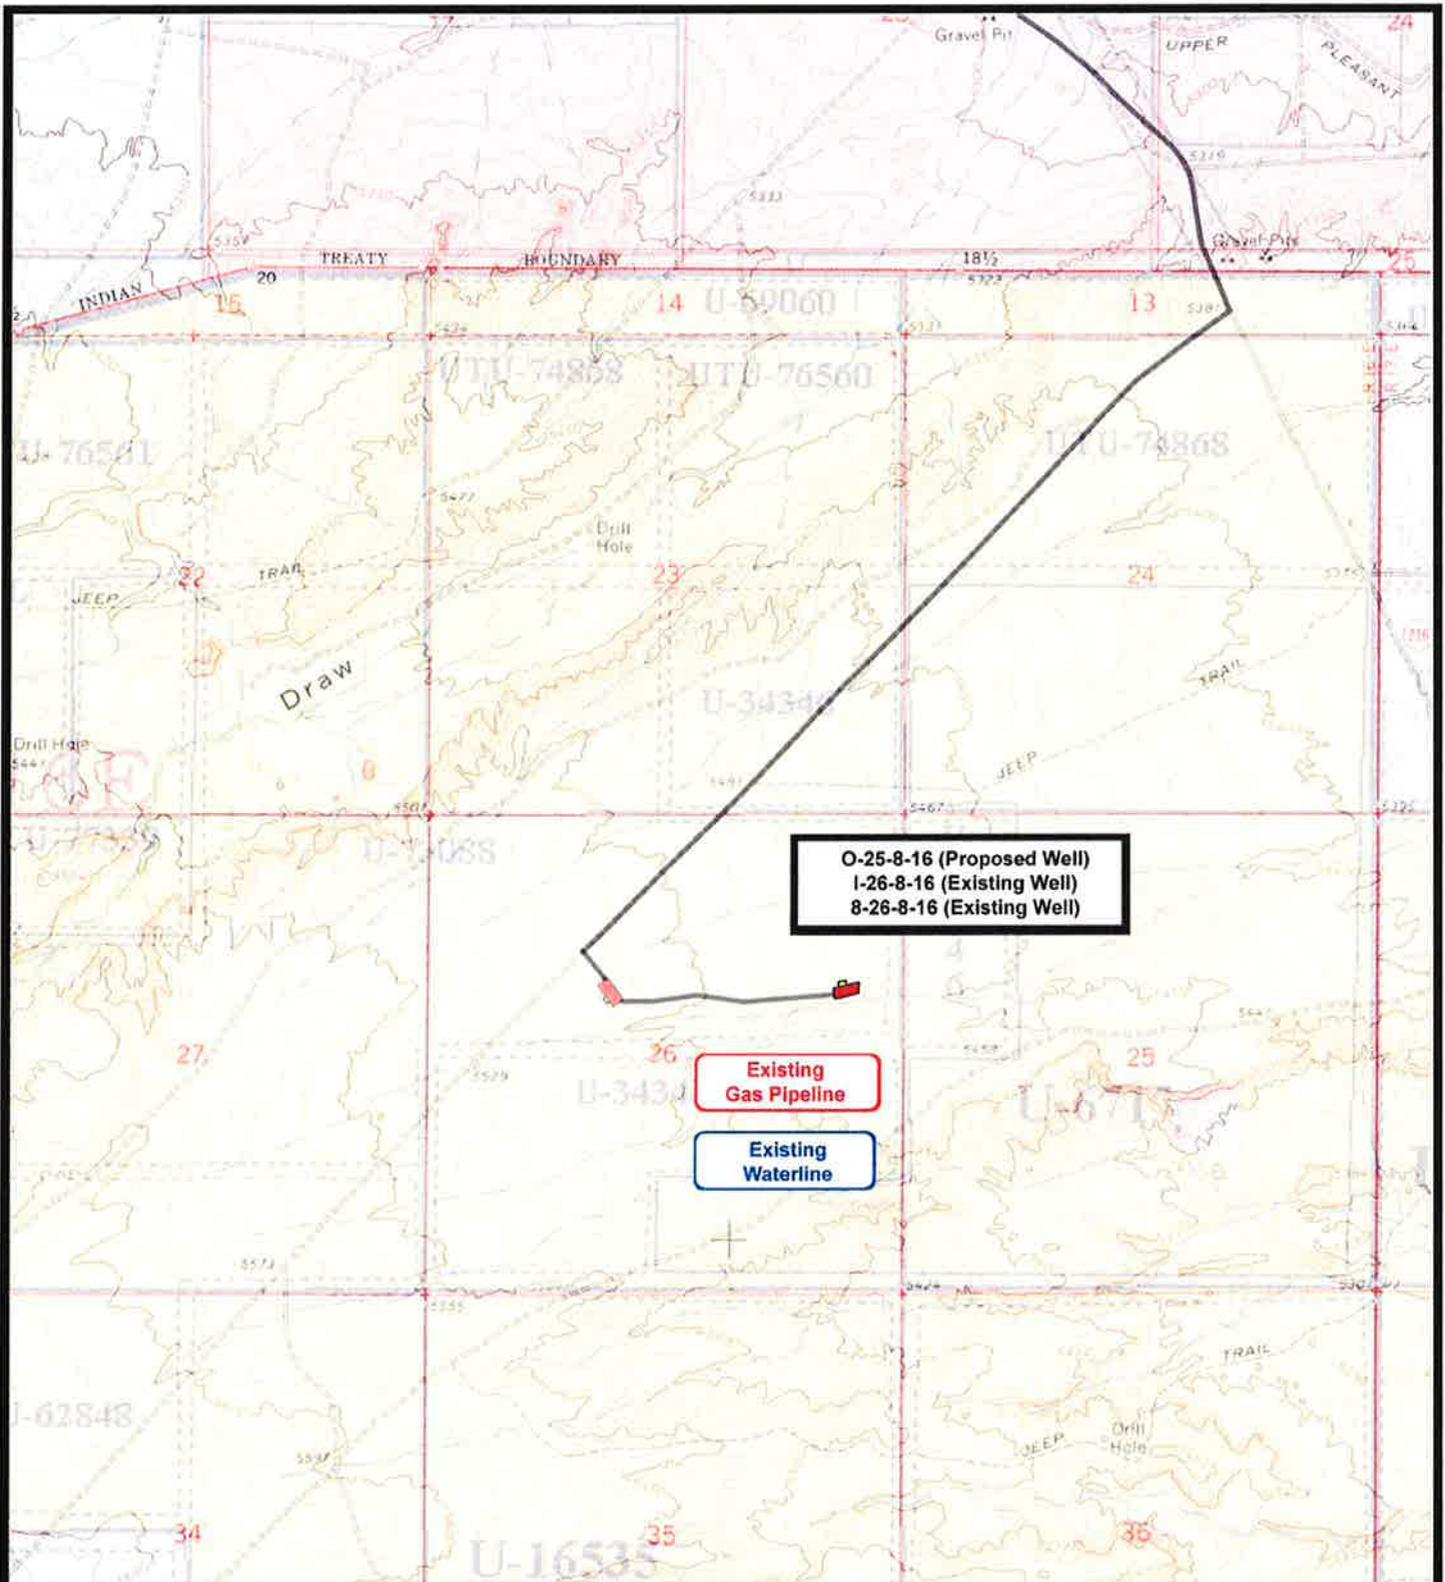

O-25-8-16 (Proposed Well)
 I-26-8-16 (Existing Well)
 8-26-8-16 (Existing Well)

Existing Gas Pipeline

Existing Waterline

NEWFIELD
 Exploration Company

O-25-8-16 (Proposed Well)
 I-26-8-16 (Existing Well)
 8-26-8-16 (Existing Well)
 Pad Location: SENE SEC. 26, T8S, R16E, S.L.B.&M.




Tri-State
 Land Surveying Inc.
 (435) 781-2501
 180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'
 DRAWN BY: mw
 DATE: 01-15-2010

Legend

- Roads
- Proposed Gas Line
- Proposed Water Line

TOPOGRAPHIC MAP
"C"

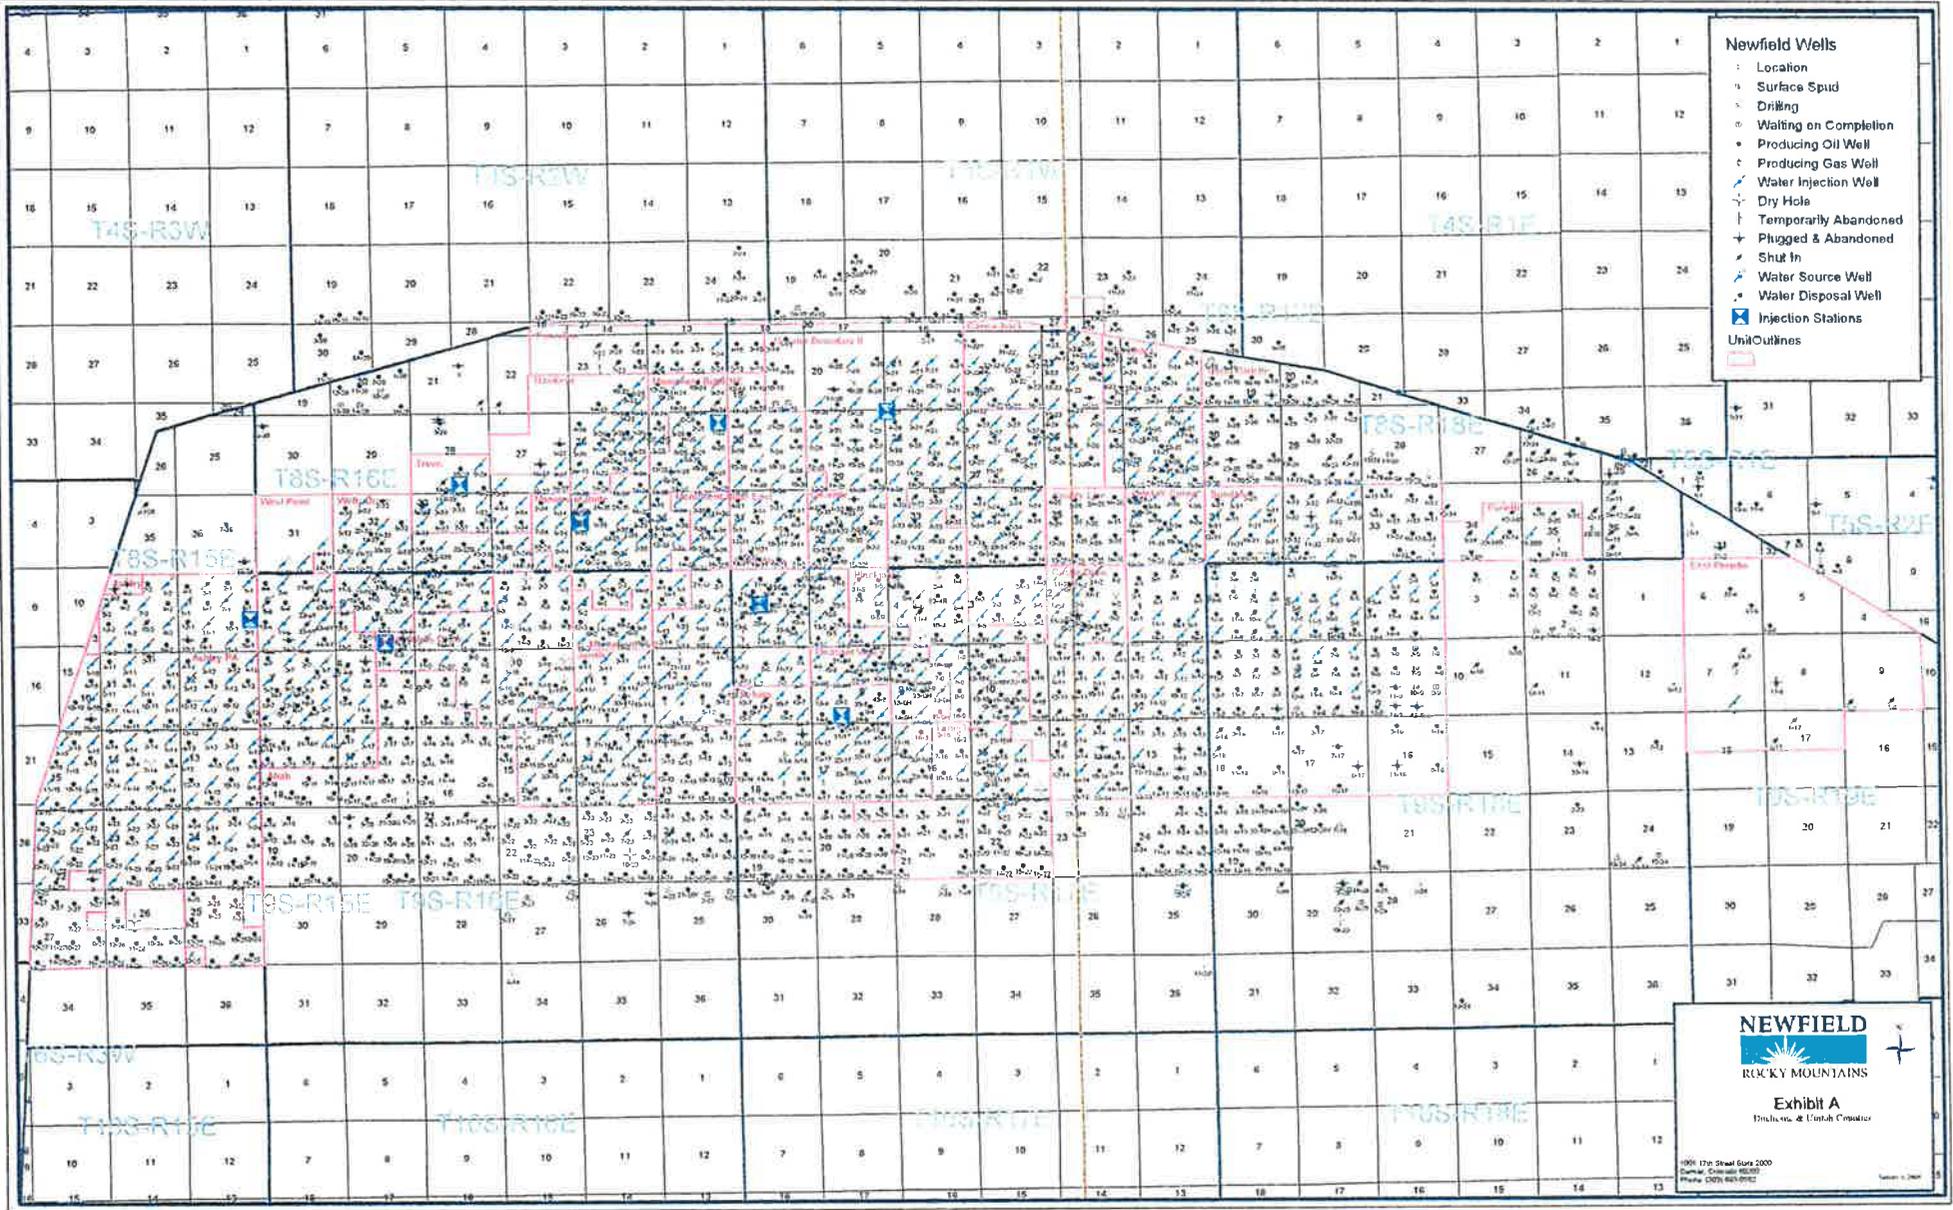


- Newfield Wells**
- Location
 - Surface Spud
 - Drilling
 - Waiting on Completion
 - Producing Oil Well
 - Producing Gas Well
 - Water Injection Well
 - Dry Hole
 - Temporarily Abandoned
 - Plugged & Abandoned
 - Shut In
 - Water Source Well
 - Water Disposal Well
 - Injection Stations
- Unit Outlines**

NEWFIELD
ROCKY MOUNTAINS

Exhibit A
Drillers & Unit Computer

1906 17th Street Suite 2000
Denver, Colorado 80202
Phone: 303.650.9100

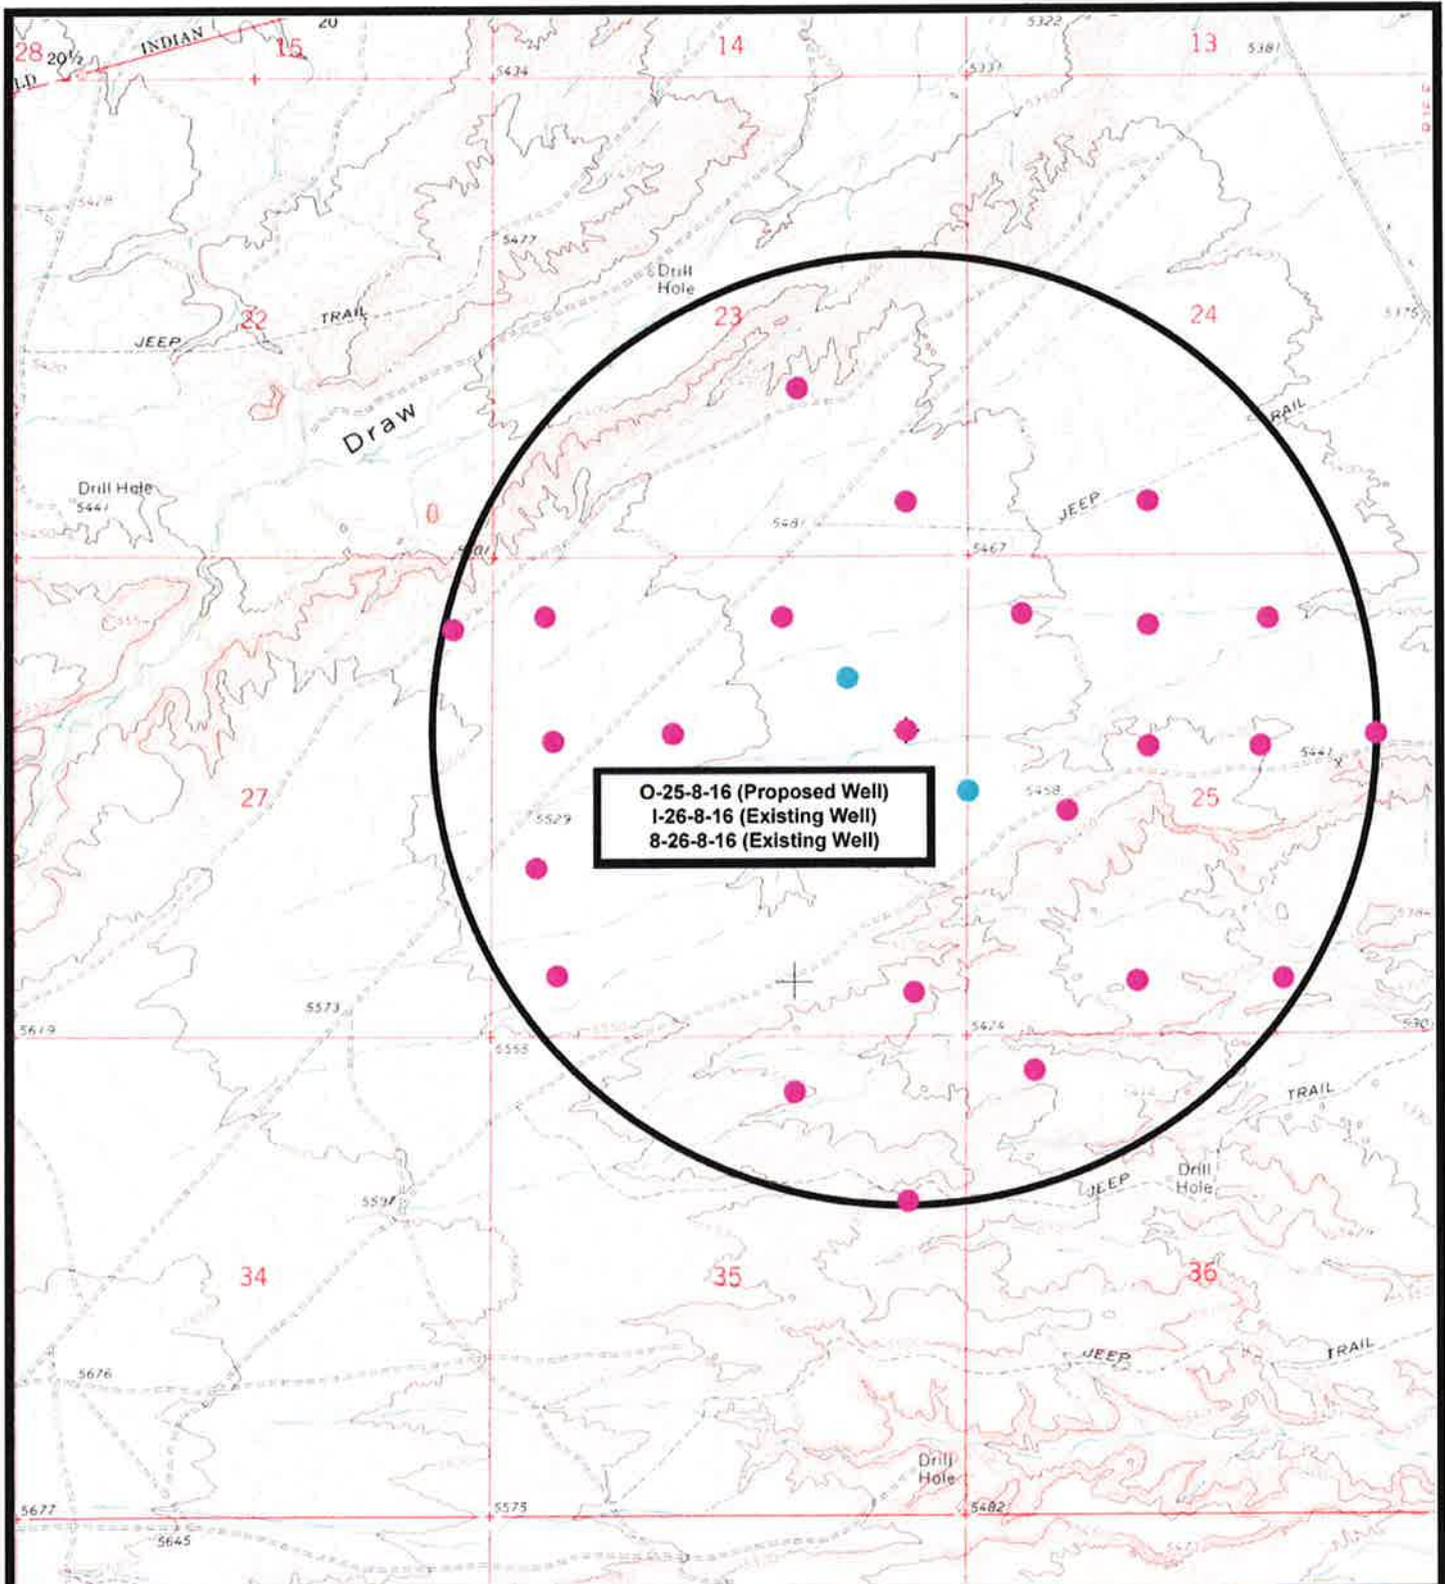

O-25-8-16 (Proposed Well)
 I-26-8-16 (Existing Well)
 8-26-8-16 (Existing Well)



O-25-8-16 (Proposed Well)
I-26-8-16 (Existing Well)
8-26-8-16 (Existing Well)
 Pad Location: SENE SEC. 26, T8S, R16E, S.L.B.&M.



Tri-State
Land Surveying Inc.
 (435) 781-2501
 180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'
 DRAWN BY: mw
 DATE: 01-15-2010

Legend

- Pad Location
- Bottom Hole Location
- One-Mile Radius

Exhibit "B"

**NEWFIELD PRODUCTION COMPANY
GREATER MONUMENT BUTTE O-25-8-16
AT SURFACE: SE/NE SECTION 26, T8S, R16E
DUCHESNE COUNTY, UTAH**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site Greater Monument Butte O-25-8-16 located in the SE 1/4 NE 1/4 Section 26, T8S, R16E, Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.4 miles \pm to the junction of this highway and UT State Hwy 53; proceed southeasterly - 6.2 miles \pm to its junction with an existing dirt road to the southwest; proceed southwesterly - 1.9 miles \pm to its junction with an existing road to the southeast; proceed southeasterly - 0.1 miles \pm to its junction with an existing road to the east; proceed easterly - 0.4 miles \pm to the existing 8-26-8-16 well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

There is no proposed access road for this location. The proposed well will be drilled off of the existing 8-26-8-16 well pad. See attached **Topographic Map "B"**.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

There are no existing facilities that will be used by this well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District
Water Right : 43-7478

Neil Moon Pond
Water Right: 43-11787

Maurice Harvey Pond
Water Right: 47-1358

Newfield Collector Well
Water Right: 41-3530 (A30414DV, contracted with the Duchesne County Conservancy District).

Please refer to the Monument Butte Field SOP. See Exhibit "A".

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), State of Utah approved surface disposal facilities, or Federally approved surface disposal facilities.

8. **ANCILLARY FACILITIES**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT**

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

- a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

- b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP** -- Bureau of Land Management.

12. **OTHER ADDITIONAL INFORMATION**

Newfield Production Company is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, Newfield is to immediately stop work that might further disturb such materials and contact the Authorized Officer.

- a) Newfield Production will control noxious weeds along rights-of-way for roads, pipelines, well sites or other applicable facilities. On State administered land it is required that a Pesticide Use Proposal shall be submitted and given approval prior to the application of herbicides or other possible hazardous chemicals.
- b) Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on State Lands after the conclusion of drilling operations or at any other time without State authorization. However, if State authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. MOAC Report #09-173, 10/26/09. Paleontological Resource Survey prepared by, Wade E. Miller, 10/1/09. See attached report cover pages, Exhibit "D".

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the Greater Monument Butte O-25-8-16, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the Greater Monument Butte O-25-8-16, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

The State office shall be notified upon site completion prior to moving on the drilling rig.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative

Name: Tim Eaton
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification

Please be advised that Newfield Production Company is considered to be the operator of well #O-25-8-16, Duchesne County, Utah and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #WYB000493.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

1/26/10
Date _____


Mandie Crozier
Regulatory Specialist
Newfield Production Company

NEWFIELD PRODUCTION COMPANY


WELL PAD INTERFERENCE PLAT

0-25-8-16 (Proposed Well)

1-26-8-16 (Existing Well)

8-26-8-16 (Existing Well)

Pad Location: SENE Section 26, T8S, R16E, S.L.B.&M.

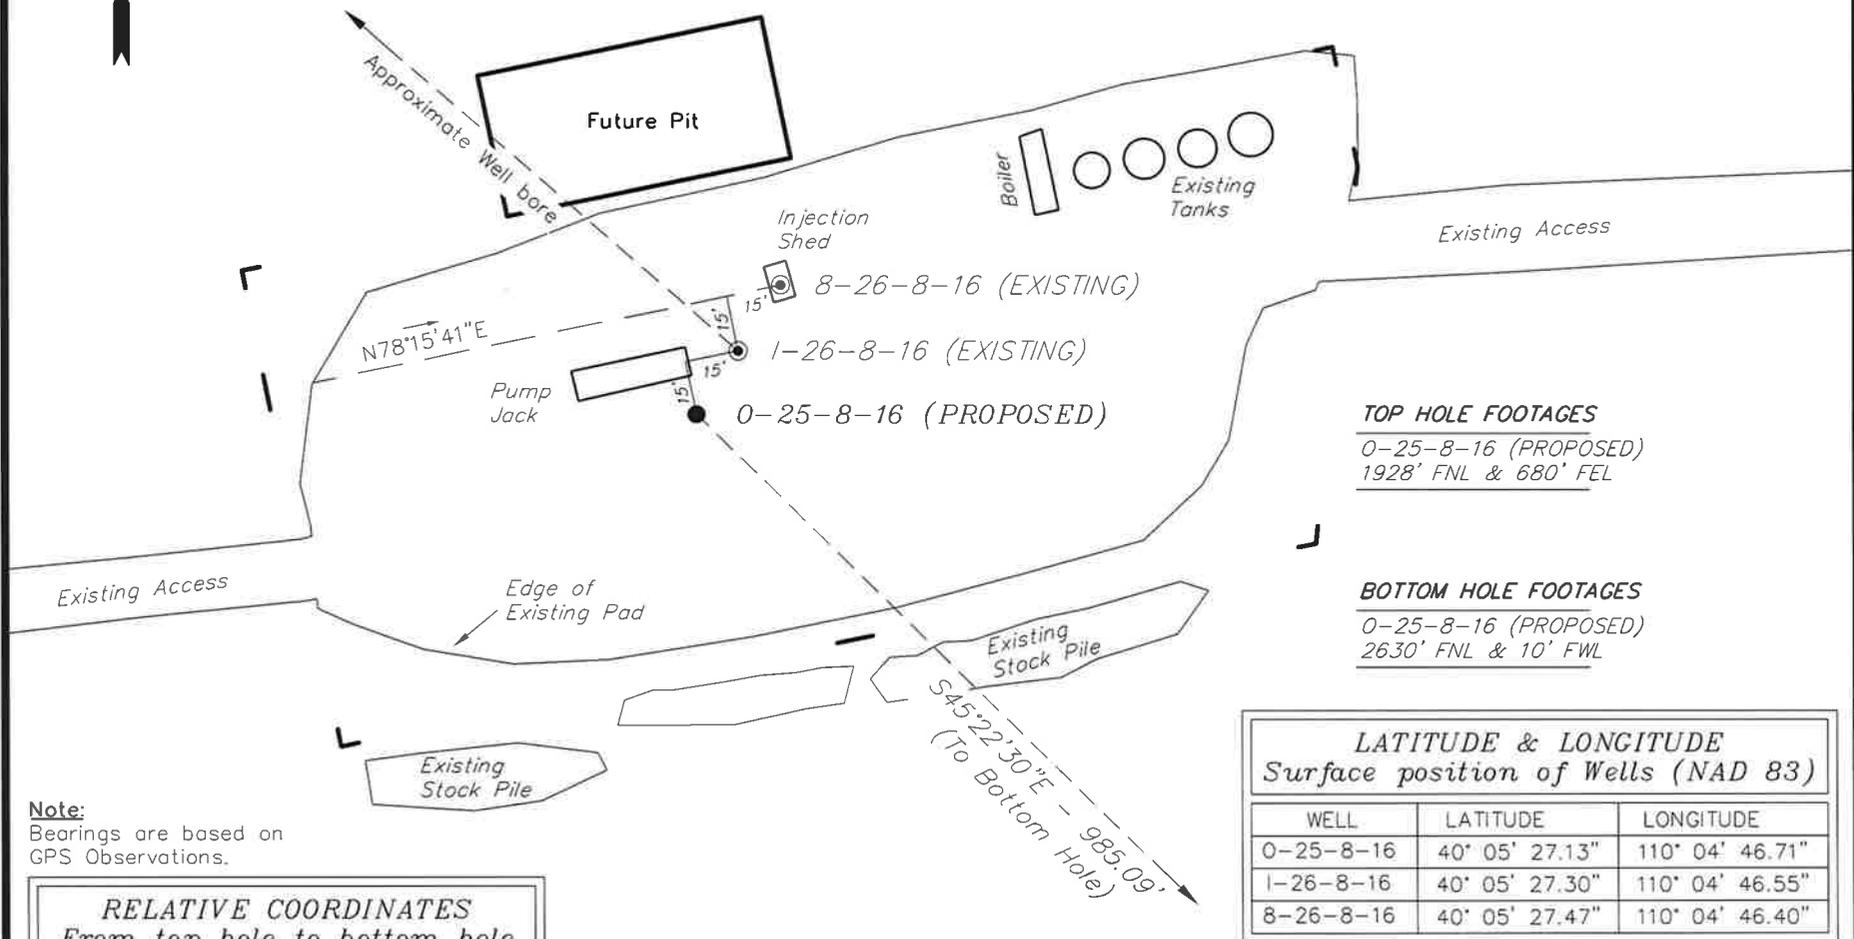

TOP HOLE FOOTAGES

0-25-8-16 (PROPOSED)
1928' FNL & 680' FEL

BOTTOM HOLE FOOTAGES

0-25-8-16 (PROPOSED)
2630' FNL & 10' FWL

LATITUDE & LONGITUDE Surface position of Wells (NAD 83)		
WELL	LATITUDE	LONGITUDE
0-25-8-16	40° 05' 27.13"	110° 04' 46.71"
1-26-8-16	40° 05' 27.30"	110° 04' 46.55"
8-26-8-16	40° 05' 27.47"	110° 04' 46.40"

Note:
Bearings are based on
GPS Observations.

RELATIVE COORDINATES From top hole to bottom hole		
WELL	NORTH	EAST
0-25-8-16	-692'	701'

SURVEYED BY: T.P.	DATE SURVEYED: 08-31-09
DRAWN BY: F.T.M.	DATE DRAWN: 09-01-09
SCALE: 1" = 50'	REVISED: M.W. - 01-15-10

(435) 781-2501

Tri State
Land Surveying, Inc.

180 NORTH VERNAL AVE. VERNAL, UTAH 84078


NEWFIELD PRODUCTION COMPANY

0-25-8-16 (Proposed Well)

1-26-8-16 (Existing Well)

8-26-8-16 (Existing Well)

Pad Location: SENE Section 26, T8S, R16E, S.L.B.&M.

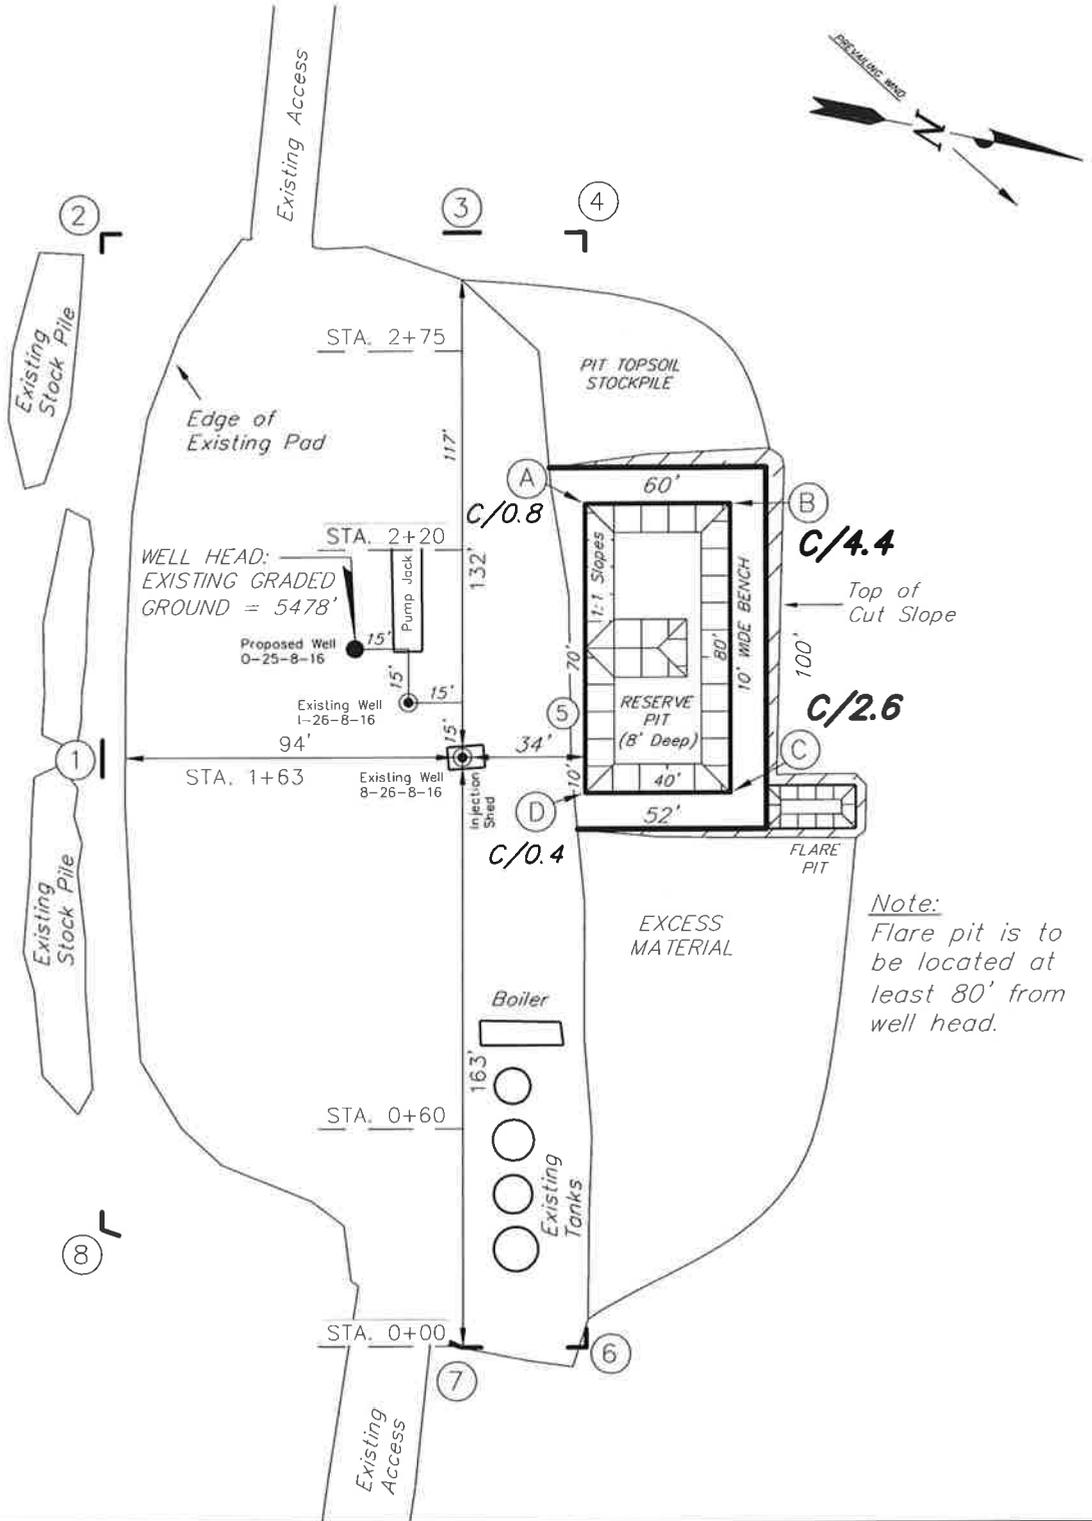

Note:
Flare pit is to be located at least 80' from well head.

SURVEYED BY: T.P.	DATE SURVEYED: 08-31-09
DRAWN BY: F.T.M.	DATE DRAWN: 09-01-09
SCALE: 1" = 50'	REVISED: M.W. - 01-15-10

Tri State
Land Surveying, Inc.
(435) 781-2501
180 NORTH VERNAL AVE. VERNAL, UTAH 84078





NEWFIELD PRODUCTION COMPANY

CROSS SECTIONS

0-25-8-16 (Proposed Well)

1-26-8-16 (Existing Well)

8-26-8-16 (Existing Well)

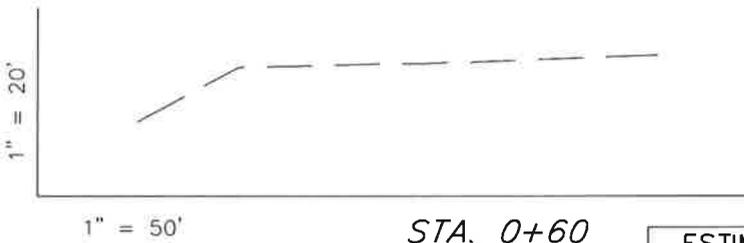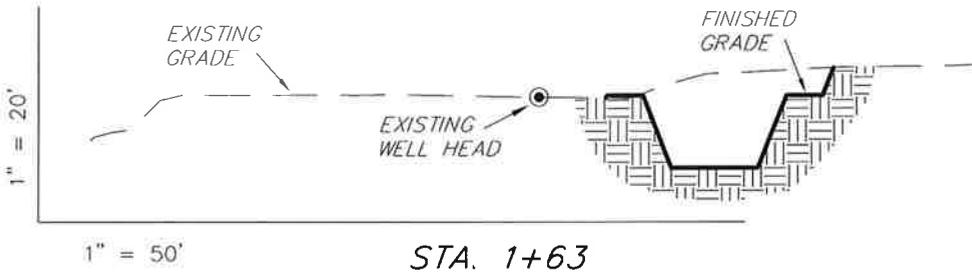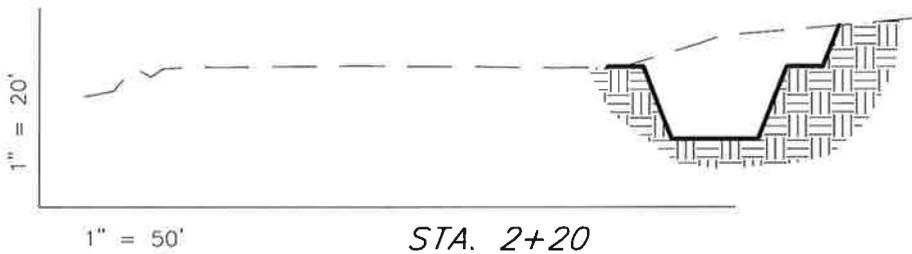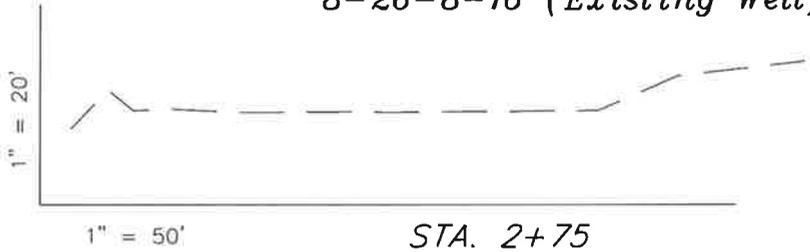

NOTE:
UNLESS OTHERWISE NOTED
CUT SLOPES ARE AT 1:1
FILL SLOPES ARE AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES (No Shrink or swell adjustments have been used) (Expressed in Cubic Yards)				
ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	460	0	Topsoil is not included in Pad Cut	460
PIT	640	0		640
TOTALS	1,100	0	130	1,100

SURVEYED BY: T.P.	DATE SURVEYED: 08-31-09
DRAWN BY: F.T.M.	DATE DRAWN: 09-01-09
SCALE: 1" = 50'	REVISED: M.W. - 01-15-10

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078
(435) 781-2501



NEWFIELD PRODUCTION COMPANY

TYPICAL RIG LAYOUT

0-25-8-16 (Proposed Well)

1-26-8-16 (Existing Well)

8-26-8-16 (Existing Well)

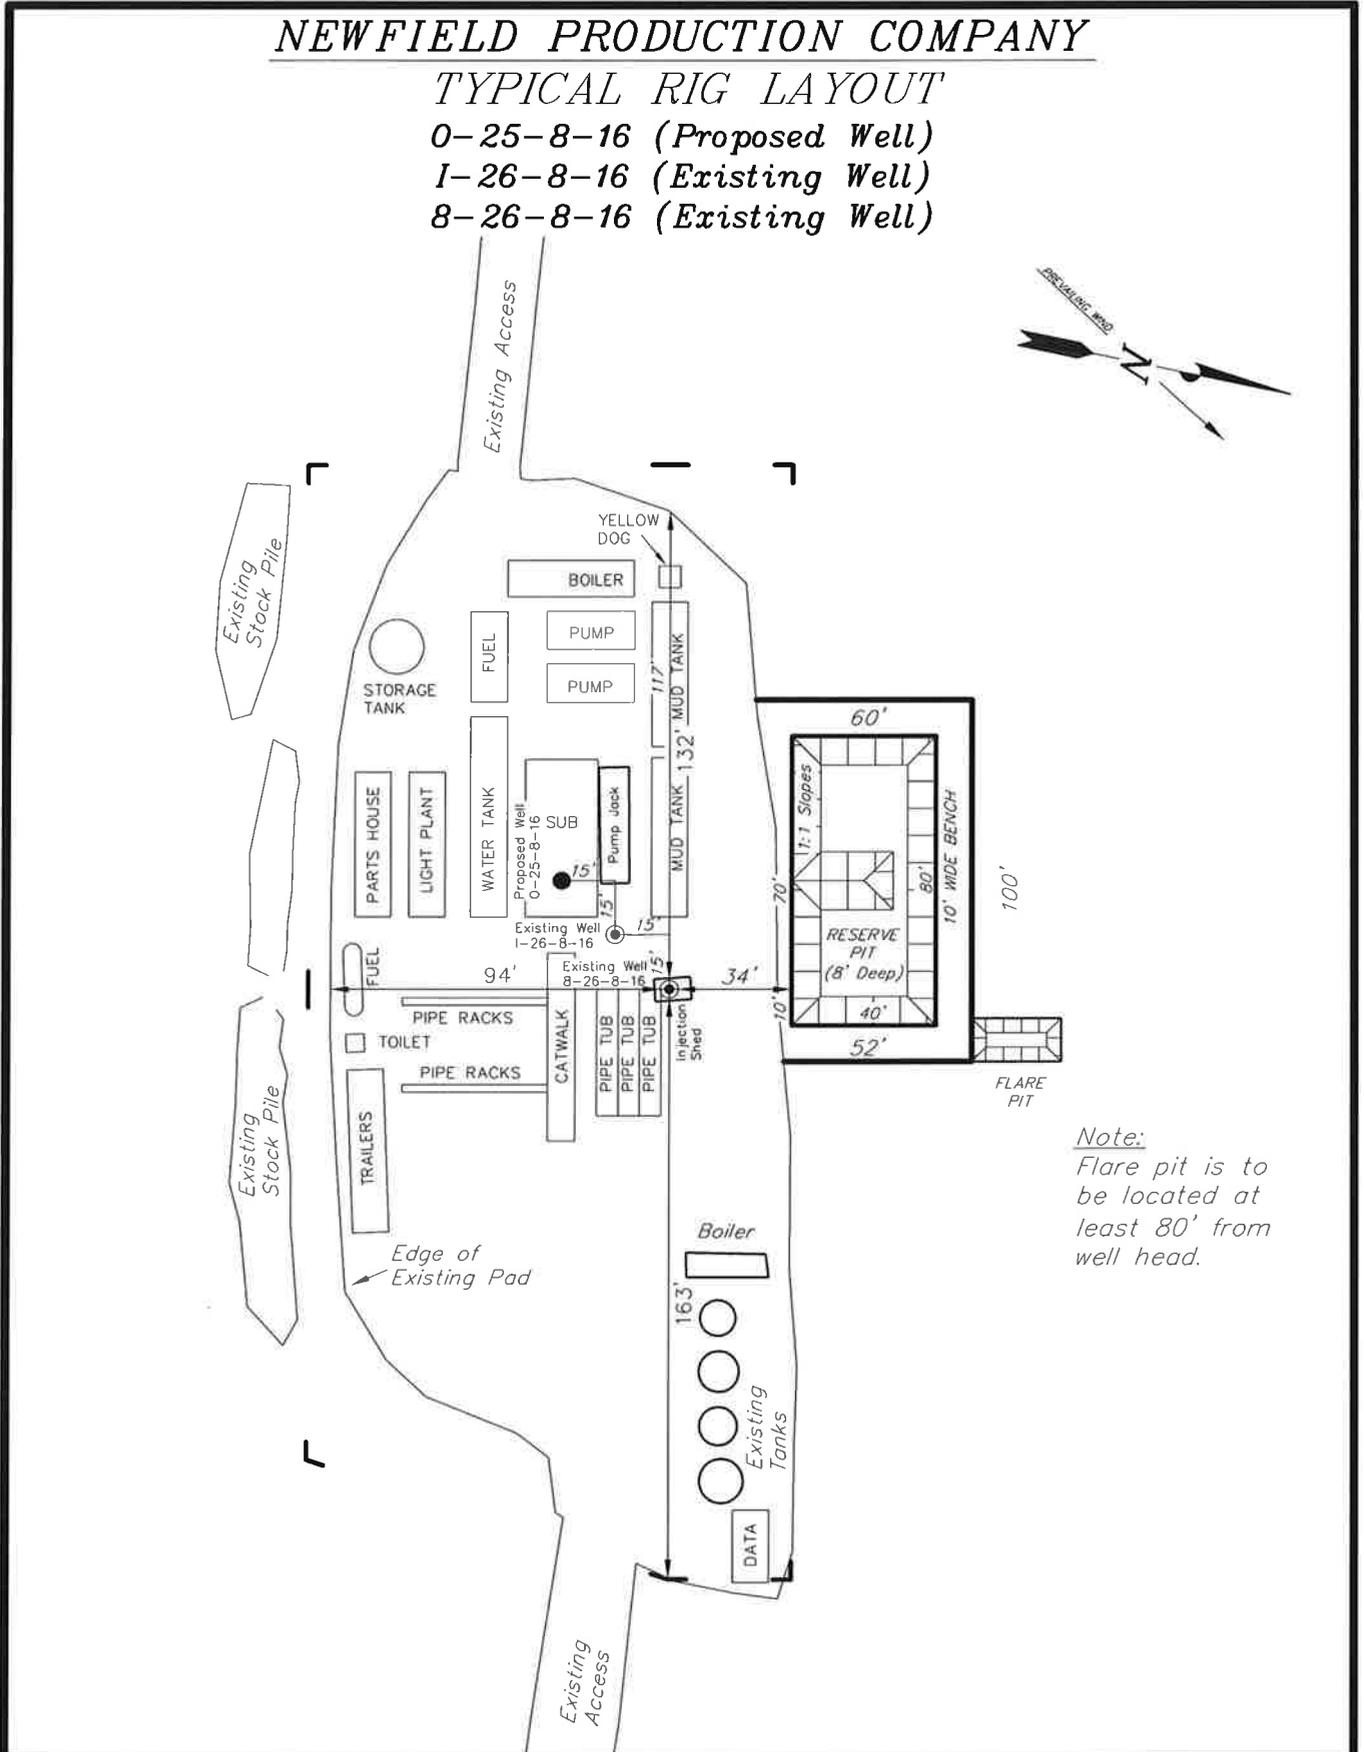

Note:
Flare pit is to be located at least 80' from well head.

SURVEYED BY: T.P.	DATE SURVEYED: 08-31-09	<p>Tri State Land Surveying, Inc. 180 NORTH VERNAL AVE. VERNAL, UTAH 84078</p>	(435) 781-2501
DRAWN BY: F.T.M.	DATE DRAWN: 09-01-09		
SCALE: 1" = 50'	REVISED: M.W. - 01-15-10		

Newfield Production Company Proposed Site Facility Diagram


Greater Monument Butte O-25-8-16

From the 8-26-8-16 Location

SE/NE Sec. 26 T8S, R16E

Duchesne County, Utah

UTU-73088

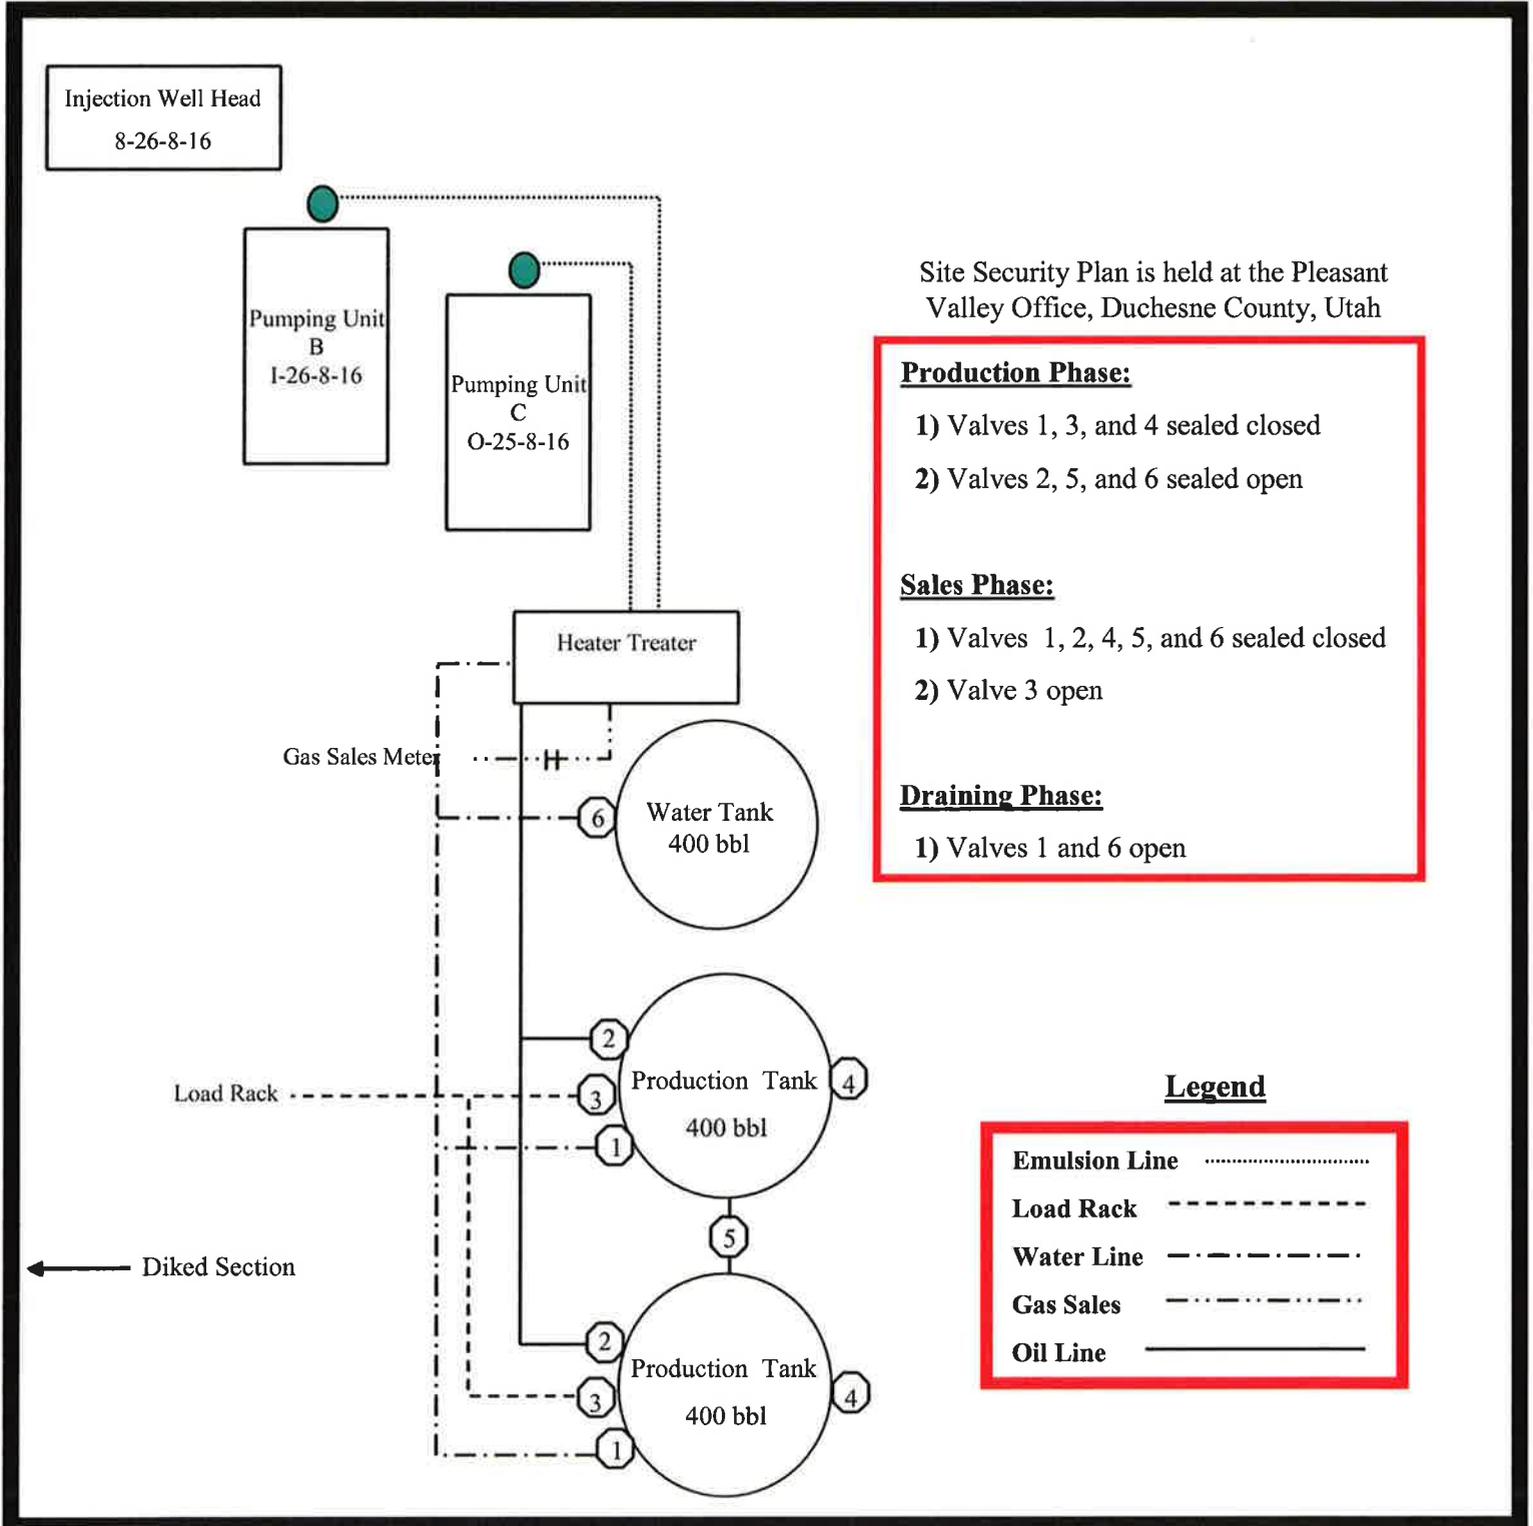

0-25-8-16

Exhibit "D"

1 of 2

CULTURAL RESOURCE INVENTORY OF
NEWFIELD EXPLORATION'S
15 PROPOSED WELL LOCATIONS IN
TOWNSHIP 8S, RANGE 16E SEC. 25, 26, 27, 34, 35, 36
AND TOWNSHIP 9S, RANGE 16E SEC. 1
DUCHESNE COUNTY, UTAH

By:

Nicole Shelnut

Prepared For:

Bureau of Land Management
Price Field Office
and
State of Utah
School and Institutional Trust Lands Administration

Prepared Under Contract With:

Newfield Exploration Company
Rt. 3 Box 3630
Myton, Utah 84052

Prepared By:

Montgomery Archaeological Consultants, Inc.
P.O. Box 219
Moab, Utah 84532

MOAC Report No. 09-173

October 26, 2009

United States Department of Interior (FLPMA)
Permit No. 09-UT-60122

Public Lands Policy Coordination Office
Permit No. 117

State of Utah Antiquities Project (Survey)
Permit No. U-09-MQ-0639b,s

NEWFIELD EXPLORATION COMPANY

**PALEONTOLOGICAL SURVEY OF PROPOSED
PRODUCTION DEVELOPMENT AREAS,
AND PROPOSED PIPELINE ROUTES
DUCHESNE & Uintah COUNTIES, UTAH**

Site Surveys of Proposed Wells

NE 1/4, NE 1/4, Sec. 25, (1-25-8-16), SE 1/4, NE 1/4, Sec. 24, (D-25-8-16), SW 1/4, SW 1/4, Sec. 24, (E-25-8-16 & P-24-8-16), SE 1/4, SW 1/4, Sec. 34, (Q-34-8-16), NW 1/4, SE 1/4, Sec. 34, (L-34-8-16 & S-34-8-16), NW 1/4, SW 1/4, Sec. 35, (T-34-8-16), NE 1/4, SW 1/4, Sec. 35, (R-35-8-16), SE 1/4, SE 1/4 Sec. 26, (S-26-8-16), NW 1/4, SW 1/4, Sec. 26, (N-26-8-16), SE 1/4, NE 1/4, Sec. 26, (O-25-8-16), SE 1/4, NE 1/4, Sec. 25, (J-25-8-16), NE 1/4, SE 1/4, Sec. 27 (S-27-8-16), SE 1/4, SW 1/4, Sec. 36, (C-1-9-16), SW 1/4, SE 1/4, Sec. 36, (B-1-9-16 & R-36-8-16), SE 1/4, SE 1/4, Sec. 36, (T-36-8-16, A-1-9-16 & K-36-8-16), SW 1/4, NW 1/4, Sec. 26, (O-26-8-16), SW 1/4, NE 1/4, Sec. 34, (H-34-8-16 & M-34-8-16), SW 1/4, SE 1/4, Sec. 27, (B-34-8-16 & C-34-8-16), T 8 S, R 16 E; NE 1/4, SW 1/4, Sec.1, (M-1-9-16), NW 1/4, SE 1/4, Sec.11, (S-11-9-16), T 9 S, R 16 E.

Proposed Pipeline Surveys

SW 1/4, SW 1/4, Sec. 8, T 9 S, R 17 E (14-8-9-17); NW 1/4, SW 1/4, Sec. 7 to SW 1/4, NW 1/4, Sec. 20, T 9 S, R 16 E (12-7-9-16 to 5-20-9-16); SE 1/4, NE 1/4 (8-31-8-18); NW 1/4, SE 1/4 (10-31-8-18); NW 1/4, SE 1/4, to SW 1/4, NE 1/4 (32-29-8-18);

REPORT OF SURVEY

Prepared for:

Newfield Exploration Company

Prepared by:

Wade E. Miller
Consulting Paleontologist
October 1, 2009

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

February 1, 2010

Memorandum

To: Assistant District Manager Minerals, Vernal District
From: Michael Coulthard, Petroleum Engineer
Subject: 2010 Plan of Development Greater Monument
Butte Unit, Duchesne and Uintah Counties,
Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2010 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

API#	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-50224	GMBU F-1-9-16	Sec 02 T09S R16E 0734 FNL 0740 FEL BHL Sec 01 T09S R16E 1325 FNL 0010 FWL
43-013-50225	GMBU H-34-8-16	Sec 34 T08S R16E 1981 FNL 2021 FEL BHL Sec 34 T08S R16E 1320 FNL 2630 FWL
43-013-50226	GMBU M-34-8-16	Sec 34 T08S R16E 1980 FNL 2000 FEL BHL Sec 34 T08S R16E 2640 FNL 2640 FEL
43-013-50231	GMBU T-24-8-16	Sec 19 T08S R17E 1928 FSL 0623 FWL BHL Sec 24 T08S R16E 1395 FSL 0010 FEL
43-013-50232	GMBU P-24-8-16	Sec 24 T08S R16E 0644 FSL 0646 FWL BHL Sec 24 T08S R16E 1320 FSL 0010 FWL
43-013-50233	GMBU E-25-8-16	Sec 24 T08S R16E 0629 FSL 0631 FWL BHL Sec 25 T08S R16E 0010 FNL 0010 FWL
43-013-50234	GMBU D-25-8-16	Sec 24 T08S R16E 0629 FSL 1951 FWL BHL Sec 25 T08S R16E 0010 FNL 1310 FWL
43-013-50235	GMBU J-25-8-16	Sec 25 T08S R16E 1948 FNL 0633 FEL BHL Sec 25 T08S R16E 1320 FNL 0010 FEL

API #	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-50236	GMBU O-25-8-16	Sec 26 T08S R16E 1928 FNL 0680 FEL BHL Sec 25 T08S R16E 2630 FNL 0010 FWL
43-013-50237	GMBU O-26-8-16	Sec 26 T08S R16E 1996 FNL 0648 FWL BHL Sec 26 T08S R16E 2640 FNL 0000 FWL
43-013-50238	GMBU S-26-8-16	Sec 26 T08S R16E 0483 FSL 0660 FEL BHL Sec 26 T08S R16E 1310 FSL 1310 FEL
43-013-50239	GMBU S-27-8-16	Sec 27 T08S R16E 2002 FSL 0657 FEL BHL Sec 27 T08S R16E 1310 FSL 1330 FEL
43-013-50240	GMBU S-34-8-16	Sec 34 T08S R16E 1994 FSL 1940 FEL BHL Sec 34 T08S R16E 1310 FSL 1310 FEL
43-013-50241	GMBU T-25-8-16	Sec 30 T08S R17E 1940 FSL 0645 FWL BHL Sec 25 T08S R16E 1280 FSL 0010 FEL

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard

bcc: File - Greater Monument Butte Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:2-1-10



January 27, 2010

State of Utah, Division of Oil, Gas and Mining
ATTN: Diana Mason
P.O. Box 145801
Salt Lake City, UT 84114-5801

2312

RE: Directional Drilling
Greater Monument Butte O-25-8-16
Greater Monument Butte (Green River) Unit

Surface Hole: T8S-R16E Section 26: SENE (UTU-73088)
1928' FNL 680' FEL

At Target: T8S-R16E Section 25: SWNW (UTU-34346)
2630' FNL 10' FWL

Duchesne County, Utah

Dear Ms. Mason;

Pursuant to the filing by Newfield Production Company (NPC) of an Application for Permit to Drill the above referenced well dated 1/26/10, a copy of which is attached, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole and target locations of this well are both within the boundaries of the Greater Monument Butte Unit (UTU-87538X), of which Newfield certifies that it is the operator. Further, Newfield Certifies that all lands within 460 feet of the entire directional well bore are within the Greater Monument Butte Unit.

NPC is permitting this well as a directional well in order to mitigate surface disturbance by utilizing pre-existing roads and pipelines.

NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please contact the undersigned at 303-383-4197 or by email at sgillespie@newfield.com. Your consideration in this matter is greatly appreciated.

Sincerely,
Newfield Production Company

A handwritten signature in blue ink that reads "Shane Gillespie". The signature is stylized and includes a horizontal line extending to the right.

Shane Gillespie
Land Associate

RECEIVED



FEB 01 2010

DIV. OF OIL, GAS & MINING

API Number: 4301350236
Well Name: Greater Monument Butte O-25-8-16
Township 08.0 S Range 16.0 E Section 26
Meridian: SLBM
Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared:
 Map Produced by Diana Mason

Units	Wells Query
STATUS	Status
ACTIVE	APD - Approved Permit
EXPLORATORY	DRL - Spudded (Drilling Commenced)
GAS STORAGE	GIW - Gas Injection
NF PP OIL	GS - Gas Storage
NF SECONDARY	GS - Gas Storage
PI OIL	LA - Location Abandoned
PP GAS	LOC - New Location
PP GEOTHERMAL	OPS - Operation Suspended
PP OIL	PA - Plugged Abandoned
SECONDARY	PGW - Producing Gas Well
TERMINATED	POW - Producing Oil Well
Fields	RET - Returned APD
Unknown	SGW - Shut-in Gas Well
ABANDONED	SOW - Shut-in Oil Well
ACTIVE	TA - Temp. Abandoned
COMBINED	TW - Test Well
INACTIVE	WDW - Water Disposal
STORAGE	WWI - Water Injection Well
TERMINATED	WSW - Water Supply Well
Sections	
Township	

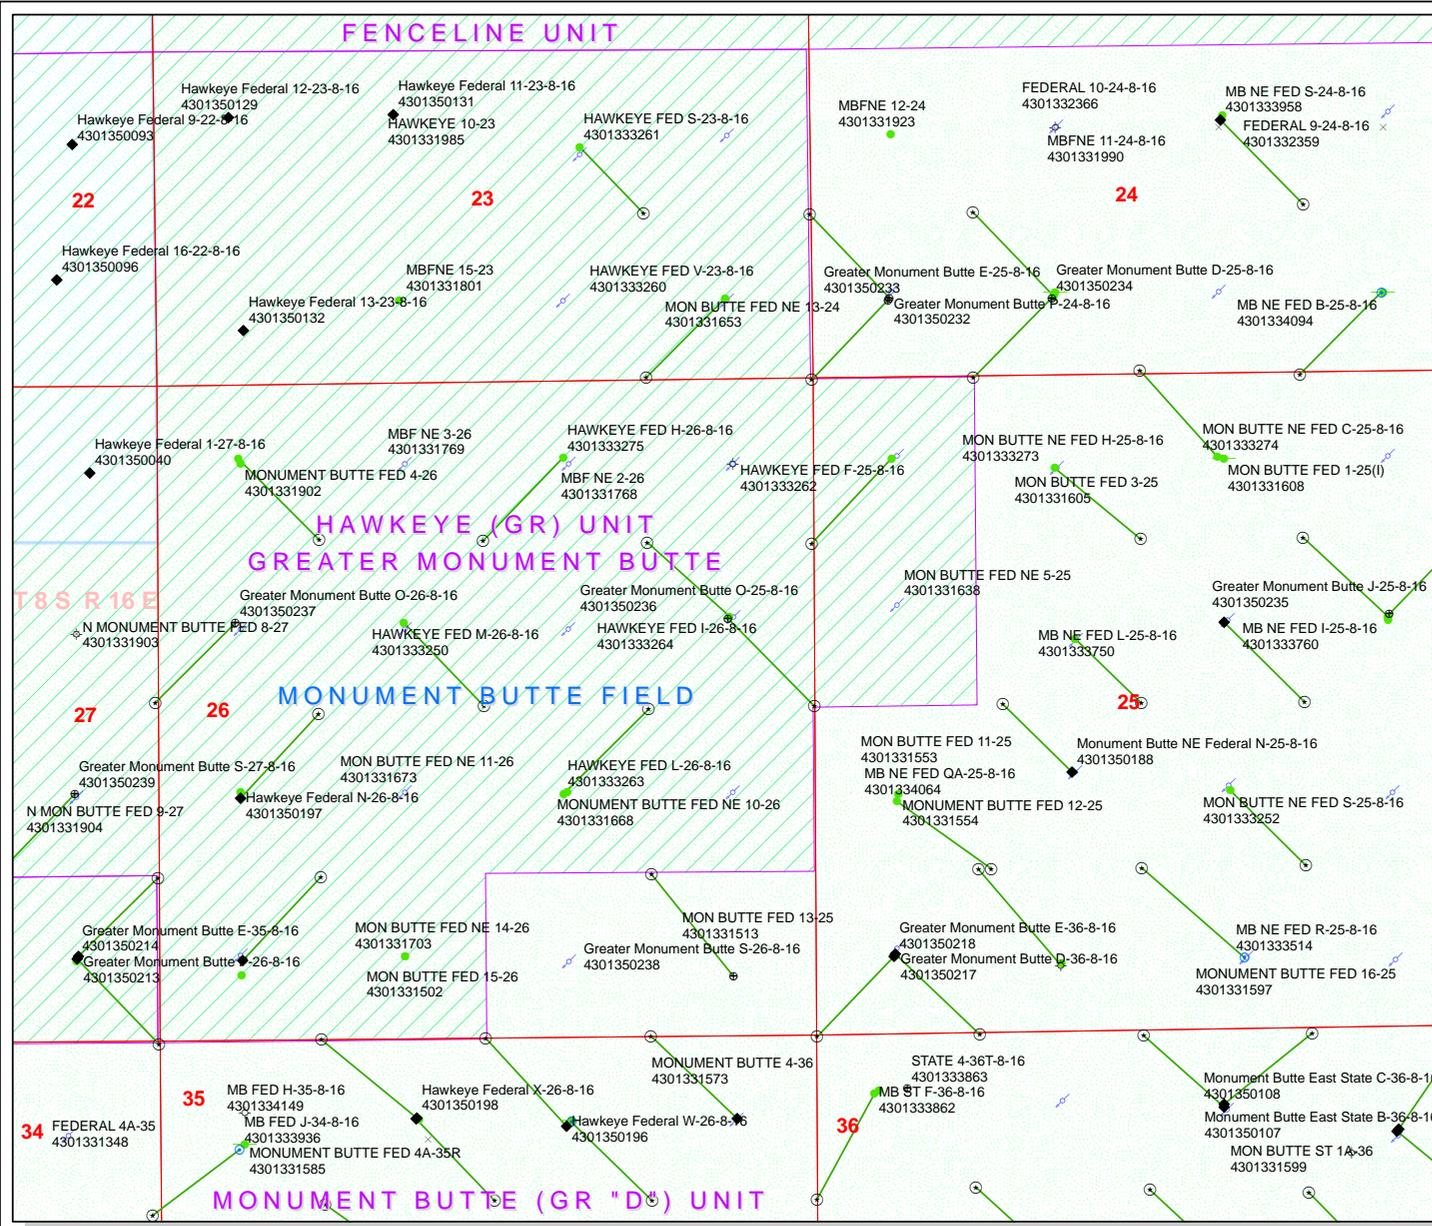

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 1/27/2010

API NO. ASSIGNED: 43013502360000

WELL NAME: Greater Monument Butte O-25-8-16

OPERATOR: NEWFIELD PRODUCTION COMPANY (N2695)

PHONE NUMBER: 435 646-4825

CONTACT: Mandie Crozier

PROPOSED LOCATION: SENE 26 080S 160E

Permit Tech Review:

SURFACE: 1928 FNL 0680 FEL

Engineering Review:

BOTTOM: 2630 FNL 0010 FWL

Geology Review:

COUNTY: DUCHESNE

LATITUDE: 40.09085

LONGITUDE: -110.07885

UTM SURF EASTINGS: 578527.00

NORTHINGS: 4438037.00

FIELD NAME: MONUMENT BUTTE

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-73088

PROPOSED PRODUCING FORMATION(S): GREEN RIVER

SURFACE OWNER: 1 - Federal

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

- PLAT
- Bond: FEDERAL - WYB000493
- Potash
- Oil Shale 190-5
- Oil Shale 190-3
- Oil Shale 190-13
- Water Permit: 43-7478
- RDCC Review:
- Fee Surface Agreement
- Intent to Commingle

Commingle Approved

LOCATION AND SITING:

- R649-2-3.
Unit: GMBU (GRRV)
- R649-3-2. General
- R649-3-3. Exception
- Drilling Unit
Board Cause No: Cause 213-11
Effective Date: 11/30/2009
Siting: Suspends General Siting
- R649-3-11. Directional Drill

Comments: Presite Completed

Stipulations: 4 - Federal Approval - dmason
15 - Directional - dmason
27 - Other - bhill



State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: Greater Monument Butte O-25-8-16
API Well Number: 43013502360000
Lease Number: UTU-73088
Surface Owner: FEDERAL
Approval Date: 2/8/2010

Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:


- Within 24 hours following the spudding of the well – contact Carol Daniels at 801-538-5284 (please leave a voicemail message if not available)
OR
submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <https://oilgas.ogm.utah.gov>

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

Approved By:

A handwritten signature in black ink that reads "Gil Hunt". The signature is written in a cursive, flowing style.

Gil Hunt
Associate Director, Oil & Gas

Spud
BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# Ross 21 Submitted By
Adam Ferrari Phone Number 435-823-6740
Well Name/Number Federal O-25-8-16
Qtr/Qtr SE/NE Section 26 Township 8S Range 16E
Lease Serial Number UTU-73088
API Number 43-013-50236

Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string.

Date/Time 1/9/2011 8:00 AM PM

Casing – Please report time casing run starts, not cementing times.

- Surface Casing
- Intermediate Casing
- Production Casing
- Liner
- Other

Date/Time 1/9/2011 2:00PM AM PM

BOPE

- Initial BOPE test at surface casing point
- BOPE test at intermediate casing point
- 30 day BOPE test
- Other

Date/Time _____ AM PM

Remarks _____

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

5. Lease Serial No.
UTU-73088

6. If Indian, Allottee or Tribe Name
NA

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		7. If Unit or CA Agreement, Name and No. Greater Monument Butte	
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		8. Lease Name and Well No. Greater Monument Butte O-25-8-16	
2. Name of Operator Newfield Production Company		9. API Well No. <u>H3-013-50236</u>	
3a. Address Route #3 Box 3630, Myton UT 84052	3b. Phone No. (include area code) (435) 646-3721	10. Field and Pool, or Exploratory Monument Butte	
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface SE/NE 1928' FNL 680' FEL Sec. 26, T8S R16E (UTU-73088) At proposed prod. zone SW/NW 2630' FNL 10' FWL Sec. 25, T8S R16E (UTU-34346)		11. Sec., T. R. M. or Blk. and Survey or Area Sec. 26, T8S R16E	
14. Distance in miles and direction from nearest town or post office* Approximately 10.0 miles south of Myton, UT		12. County or Parish Duchesne	13. State UT
15. Distance from proposed* location to nearest property or lease line, ft. Approx. 10' f/lse, NA' f/unit (Also to nearest drig. unit line, if any)	16. No. of acres in lease 1040.00	17. Spacing Unit dedicated to this well 20 Acres	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1404'	19. Proposed Depth 6,624'	20. BLM/BIA Bond No. on file WYB000493	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5478' GL	22. Approximate date work will start* <u>3rd Qtr. 2010</u>	23. Estimated duration (7) days from SPUD to rig release	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM. |

25. Signature <i>Mandie Crozier</i>	Name (Printed/Typed) Mandie Crozier	Date <u>1/26/10</u>
--	--	------------------------

Title
Regulatory Specialist

Approved by (Signature) <i>James H. Sparger</i>	Name (Printed/Typed) James H. Sparger	Date DEC 16 2010
--	--	---------------------

Title Acting Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE
--	-------------------------------

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

BUREAU OF LAND MGMT
DEPT OF THE INTERIOR

UDOGM

RECEIVED

JAN 13 2011

2010 JAN 29 PM 12:39

RECEIVED

NOS 1120-2009

AFMSS# 105X50106A

NOTICE OF APPROVAL

DIV. OF OIL, GAS & MINING

CONDITIONS OF APPROVAL ATTACHED



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company:	Newfield Production Company	Location:	SENE, Sec. 26, T8S R16E
Well No:	Greater Monument Butte O-25-8-16	Lease No:	UTU-73088
API No:	43-013-5036	Agreement:	Greater Monument Butte

OFFICE NUMBER: (435) 781-4400

OFFICE FAX NUMBER: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify Environmental Scientist)	- Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	- Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	- Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to running casing and cementing all casing strings to: ut_vn_opreport@blm.gov .
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

**SURFACE USE PROGRAM
 CONDITIONS OF APPROVAL (COAs)**

- All new and replacement internal combustion gas field engines of less than or equal to 300 design-rated horsepower must not emit more than 2 gms of NO_x per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower.
- All and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 gms of NO_x per horsepower-hour.
- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

SITE SPECIFIC CONDITIONS OF APPROVAL:

- Construction and drilling is not allowed from May 1st – June 15th to minimize impacts during Mountain plover nesting.
- Construction and drilling is not allowed from March 1 – August 15 to minimize impacts during burrowing owl nesting.
- If it is anticipated that construction or drilling will occur during the given timing restriction, a BLM or qualified biologist should be notified so surveys can be conducted. Depending upon the results of the surveys, permission to proceed may or may not be recommended or granted by the BLM biologist.
- Cultural site 42Dc426, which was determined to be eligible for the National Register of Historic Places, would be avoided by 150 feet and monitored by a BLM qualified archaeologist if construction activities are within 100 meters of the site boundary.
- Prior to construction, an invasive plants/noxious weeds inventory will be completed for all areas where surface disturbance will occur, and a completed Weed Inventory Form will be submitted to the BLM Authorized Officer.

Reclamation

- Reclamation will be completed in accordance with the Newfield Exploration Company Castle Peak and Eight Mile Flat Reclamation Plan on file with the Vernal Field Office of the BLM.

Seed Mix (Interim and Final Reclamation)

Common name	Latin name	lbs/acre	Recommended seed planting depth
Squirreltail grass	<i>Elymus elymoides</i>	3.0	1/4 - 1/2"
Needle and thread grass	<i>Hesperostipa comata</i>	3.0	1/2"

Idaho fescue	<i>Festuca idahoensis</i>	2.0	1/4 - 1/2"
Scarlet globemallow	<i>Sphaeralcea coccinea</i>	1.0	1/8 - 1/4"
Galleta grass	<i>Pleuraphis jamesii</i>	3.0	1/2"
Gardner's saltbush	<i>Atriplex gardneri</i>	2.0	1/2"
Blue flax (Lewis flax)	<i>Linum lewisii</i>	2.0	1/8 - 1/4"

- All pounds are pure live seed.
- All seed and mulch would be certified weed free.
- Rates are set for drill seeding; double rate if broadcasting.

Monitoring and Reporting

- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) that designates the proposed site-specific monitoring and reference sites chosen for the location. A description of the proposed sites shall be included, as well as a map showing the locations of the proposed sites.
- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) 3 growing seasons after reclamation efforts have occurred evaluating the status of the reclaimed areas in order to determine whether the BLM standards set forth in the Green River District Reclamation Guidelines have been met (30% or greater basal cover).

**DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

SITE SPECIFIC DOWNHOLE COAs:

- The operator shall comply with all applicable requirements in the SOP (version: "Greater Monument Butte Green River Development Program", June 24, 2008). The operator shall also comply with applicable laws and regulations; with the lease terms, Onshore Oil and Gas Orders, NTL's; and with other orders and instructions of the authorized officer.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB

or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4.

Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other Instructions on page 2

1. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. USA UTU-73088
2. Name of Operator NEWFIELD PRODUCTION COMPANY		6. If Indian, Allottee or Tribe Name.
3a. Address Route 3 Box 3630 Myton, UT 84052	3b. Phone (include are code) 435.646.3721	7. If Unit or CA/Agreement, Name and/or GMBU
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) <i>24</i> Section 26 T8S R16E		8. Well Name and No. MON BUTTE O-25-8-16
		9. API Well No. 4301350236
		10. Field and Pool, or Exploratory Area GREATER MB UNIT
		11. County or Parish, State DUCHESNE, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Weekly Status Report
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	<i>Spud</i>

13. Describe Proposed or Completed Operation: (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomplate in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 1/12/11 MIRU Ross #21. Spud well @8:00 AM. Drill 310' of 12 1/4" hole with air mist. At @ 2:00 PM TIH W/ 7 Jt's 8 5/8" J-55 24# csgn. Set @ 302.25'. On 1/14/11 cement with 160 sks of class "G" w/ 2% CaCL2 + 0.25#/sk Cello- Flake Mixed @ 15.8ppg w/ 1.17ft3/sk yield. Returned 5 barrels of cement to pit. WOC.

RECEIVED
JAN 25 2011
DIV. OF OIL, GAS & MINING

I hereby certify that the foregoing is true and correct (Printed/ Typed) Adam Ferrari	Title Production Engineer
Signature <i>Adam Ferrari</i>	Date 01/18/2011

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on page 2)

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

5. LEASE DESIGNATION AND SERIAL NUMBER:
USA UTU-73088

SUNDRY NOTICES AND REPORTS ON WELLS

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

7. UNIT or CA AGREEMENT NAME:
GMBU

1. TYPE OF WELL: OIL WELL GAS WELL OTHER

8. WELL NAME and NUMBER:
MON BUTTE O-25-8-16

2. NAME OF OPERATOR:
NEWFIELD PRODUCTION COMPANY

9. API NUMBER:
4301350236

3. ADDRESS OF OPERATOR:
Route 3 Box 3630 CITY Myton STATE UT ZIP 84052

PHONE NUMBER:
435.646.3721

10. FIELD AND POOL, OR WILDCAT:
GREATER MB UNIT

4. LOCATION OF WELL:
FOOTAGES AT SURFACE:

COUNTY: DUCHESNE

OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: ²⁶ 7⁵, T8S, R16E

STATE: UT

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARITLY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: <u>02/24/2011</u>	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/STOP)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: - Weekly Status Report
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The above subject well was completed on 02-24-11, attached is a daily completion status report.

NAME (PLEASE PRINT) Lucy Chavez-Naupoto

TITLE Administrative Assistant

SIGNATURE *Lucy Chavez-Naupoto*

DATE 02/24/2011

(This space for State use only)

RECEIVED
MAR 01 2011

DIV. OF OIL, GAS & MINING

Daily Activity Report**Format For Sundry****MON BUTTE O-25-8-16****12/1/2010 To 4/28/2011****2/10/2011 Day: 1****Completion**

Rigless on 2/10/2011 - Run CBL & shoot first stage. - Install 5M frac head. NU 5M Cameron BOP. RU H/O truck & pressure test casing, blind rams, frac head & casing valves to 4500 psi. RU Perforators LLC WLT w/ mast & run CBL under pressure. WLTD @ 6637' cement top @ 108'. Perforate CP5 sds as shown in perforation report. 159 BWTR. SWIFN.

Daily Cost: \$0**Cumulative Cost:** \$16,042**2/18/2011 Day: 2****Completion**

Rigless on 2/18/2011 - MIRU Bj Services and PSI WL. Frac 1st stage. Perforate and frac remaining 4 stages. RU flowback well for 7 1/2 hrs. Turned to oil. SIWFN w/ 700 psi and 934 BWTR. - MIRU Bj Services and PSI WL. Frac 1st stage. Perforate and frac remaining 4 stages. RU flowback well for 7 1/2 hrs. Turned to oil. SIWFN w/ 700 psi and 934 BWTR.

Daily Cost: \$0**Cumulative Cost:** \$118,335**2/21/2011 Day: 3****Completion**

WWS #3 on 2/21/2011 - MIRU WWS #3. Set kill plug. Change out BOP and WH. RIH w/ 4 3/4" chomp bit and 2 7/8" J-55 tbg. 115 jts in, EOT @ 3578'. Circulate well clean. SIWFN w/ 956 BWTR. - MIRU WWS #3. Hot oiler steamed and thawed out BOP and WH. Hot oiler pumped 15 BW. RU Extreme WL. 700 psi on well. RIH w/ Weatherford kill plug. Set kill plug @ 4670'. RD Extreme WL. Bleed off pressure. ND Cameron BOP & WH. NU 3M WH and Schaffer BOP. Talley, PU and RIH w/ 4 3/4" chomp bit and 2 7/8" J-55 tbg. 115 jts in, EOT @ 3578'. Circulate well clean. SIWFN w/ 956 BWTR.

Daily Cost: \$0**Cumulative Cost:** \$167,750**2/22/2011 Day: 4****Completion**

WWS #3 on 2/22/2011 - D/O kill plug and 4 composite plugs. Circulate well clean w/ EOT @ 6325'. SIWFN w/ 476 BWTR. - Hot oiler steamed and thawed out WH and BOP. Continue PU and RIH w/ tbg. Tagged plug @ 4670'. RU RBS power swivel. Drill out kill plug in 28 mins. Tag plug @ 4840', D/O in 31 mins. Tag plug @ 5280', D/O 34 mins. Tag plug @ 5620', D/O in 29 mins. Tag fill @ 6018', Plug @ 6300', D/O in 36 mins. Circulate well clean w/ EOT @ 6325'. SIWFN w/ 476 BWTR.

Daily Cost: \$0**Cumulative Cost:** \$177,738**2/24/2011 Day: 5****Completion**

WWS #3 on 2/24/2011 - C/O to PBTD. Swab, Flow. C/O PBTD. TOH w/ tbg. LD bit. TIH w/ production tbg. ND BOP. Set TA. NU WH. SIWFN w/ 461 BWTR. - Hot oiler steamed and thawed out BOP and WH. 700 psi on csg, 490 psi on tbg. Pumped 30 BW down tbg. Continue

RIH w/ tbg. Tagged fill @ 6602'. C/O to PBTB @ 6667'. LD 2 jts of tbg. EOT @ 6602'. RU swab equipment. Made 1 swab run. Well started flowing. Flowed back 140 BTF. Pumped 30 BW down tbg. RIH w/ tbg. Tagged PBTB @ 6667'. Circulate well clean w/ 240 bbls of 10# brine. LD extra tbg. TOH w/ tbg. LD bit. TIH w/ production tbg as follows: NC, 2- jts, SN, 1 jt, TA, 206 jts of tbg. ND BOP. Set TA w/ 18,000#'s of tension. NU WH. SIWFN w/ 461 BWTR. - Hot oiler thawed out WH. Flush tbg w/ 60 BW. PU and RIH w/ "A" grade rod string as follows: Central hydraulic 2 1/2" X 1 3/4" X 24' RHAC, 1- 3/4" X 4' Stabilizer pony, 4- 1 1/2" wt bars, 252- 7/8" guided rods (8 per), 1- 7/8" X 4' pony, 1 1/2" X 30' polish rod. Hang head, Space out rods. Pressure test unit to 800 psi. RDMOSU. POP @ 4:00 PM w/ 144" SL @ 4 SPM. 521 BWTR. FINAL REPORT!! - Hot oiler steamed and thawed out BOP and WH. 700 psi on csg, 490 psi on tbg. Pumped 30 BW down tbg. Continue RIH w/ tbg. Tagged fill @ 6602'. C/O to PBTB @ 6667'. LD 2 jts of tbg. EOT @ 6602'. RU swab equipment. Made 1 swab run. Well started flowing. Flowed back 140 BTF. Pumped 30 BW down tbg. RIH w/ tbg. Tagged PBTB @ 6667'. Circulate well clean w/ 240 bbls of 10# brine. LD extra tbg. TOH w/ tbg. LD bit. TIH w/ production tbg as follows: NC, 2- jts, SN, 1 jt, TA, 206 jts of tbg. ND BOP. Set TA w/ 18,000#'s of tension. NU WH. SIWFN w/ 461 BWTR. - Hot oiler thawed out WH. Flush tbg w/ 60 BW. PU and RIH w/ "A" grade rod string as follows: Central hydraulic 2 1/2" X 1 3/4" X 24' RHAC, 1- 3/4" X 4' Stabilizer pony, 4- 1 1/2" wt bars, 252- 7/8" guided rods (8 per), 1- 7/8" X 4' pony, 1 1/2" X 30' polish rod. Hang head, Space out rods. Pressure test unit to 800 psi. RDMOSU. POP @ 4:00 PM w/ 144" SL @ 4 SPM. 521 BWTR. FINAL REPORT!! **Finalized**

Daily Cost: \$0

Cumulative Cost: \$187,296

Pertinent Files: Go to File List

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well Oil Well Gas Well Dry Other
 b. Type of Completion: New Well Work Over Deepen Plug Back Diff. Resvr.,
 Other: _____

5. Lease Serial No.
UTU-73088

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No.
GMBU

2. Name of Operator
NEWFIELD EXPLORATION COMPANY

8. Lease Name and Well No.
GREATER MON BT O-25-8-16

3. Address
1401 17TH ST. SUITE 1000 DENVER, CO 80202

3a. Phone No. (include area code)
(435) 646-3721

9. AFI Well No.
43-013-50236

4. Location of Well (Report location clearly and in accordance with Federal requirements)*
 At surface 1928' FNL & 680' FEL (SE/NE) SEC. 26, T8S, R16E (UTU-73088)
 At top prod. interval reported below 2511' FNL & 73' FEL (SE/NE) SEC. 26, T8S, R16E (UTU-73088)
 At total depth 2467' FSL & 207' FWL (NW/SW) SEC. 25, T8S, R16E (UTU-67170)

10. Field and Pool or Exploratory
GREATER MB UNIT

11. Sec., T., R., M., on Block and Survey or Area
SEC. 26, T8S, R16E

12. County or Parish
DUCHESNE

13. State
UT

14. Date Spudded
01/12/2011

15. Date T.D. Reached
01/29/2011

16. Date Completed 02/23/2011
 D & A Ready to Prod.

17. Elevations (DF, RKB, RT, GL)*
5478' GL 5490' KB

18. Total Depth: MD 6720'
TVD 6588'

19. Plug Back T.D.: MD 6667'
TVD 6536'

20. Depth Bridge Plug Set: MD
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
DUAL IND GRD, SP, COMP. DENSITY, COMP. NEUTRON, GR, CALIPER, CMT BOND

22. Was well cored? No Yes (Submit analysis)
 Was DST run? No Yes (Submit report)
 Directional Survey? No Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	8-5/8" J-55	24#	0	312'		160 CLASS G			
7-7/8"	5-1/2" J-55	15.5#	0	6711'		300 PRIMLITE		108'	
						420 50/50 POZ			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-7/8"	EOT@ 6518'	TA @ 6420'						

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Green River	4717'	6467'	6458-6467'	.36"	27	
B)			4717-6234'	.34"	120	
C)						
D)						

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Depth Interval	Amount and Type of Material
4717-6467'	Frac w/ 167099#'s 20/40 sand in 1304 bbls of Lightning 17 fluid in 5 stages

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
02/24/11	03/08/11	24	→	78	32	21			2-1/2" x 1-3/4" x 24' RHAC Pump
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→					PRODUCING	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

*(See instructions and spaces for additional data on page 2)

RECEIVED

MAR 21 2011

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production ➔	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate ➔	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production ➔	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate ➔	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

29. Disposition of Gas (Solid, used for fuel, vented, etc.)

SOLD & USED FOR FUEL

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

GEOLOGICAL MARKERS


Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
GREEN RIVER	4717'	6467'		GARDEN GULCH MRK GARDEN GULCH 1	4127' 4339'
				GARDEN GULCH 2 POINT 3	4469' 4756'
				X MRKR Y MRKR	4998' 5032'
				DOUGALS CREEK MRK BI CARBONATE MRK	5160' 5420'
				B LIMESTON MRK CASTLE PEAK	5556' 6117'
				BASAL CARBONATE WASATCH	6522' 6647'

32. Additional remarks (include plugging procedure):

33. Indicate which items have been attached by placing a check in the appropriate boxes:

- Electrical/Mechanical Logs (1 full set req'd.)
 Geologic Report
 DST Report
 Directional Survey
 Sundry Notice for plugging and cement verification
 Core Analysis
 Other: **Drilling Daily Activity**

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Lucy Chavez-Naupoto Title Administrative Assistant
 Signature  Date 03/10/2011

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

NEWFIELD



NEWFIELD EXPLORATION

**USGS Myton SW (UT)
SECTION 26 T8S, R16E
O-25-8-16**

Wellbore #1

Design: Actual

Standard Survey Report

01 February, 2011



PayZone Directional Services, LLC.

Survey Report



Company:	NEWFIELD EXPLORATION	Local Co-ordinate Reference:	Well O-25-8-16
Project:	USGS Myton SW (UT)	TVD Reference:	O-25-8-16 @ 5490.0ft (Newfield Rig #1)
Site:	SECTION 26 T8S, R16E	MD Reference:	O-25-8-16 @ 5490.0ft (Newfield Rig #1)
Well:	O-25-8-16	North Reference:	True
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Actual	Database:	EDM 2003.21 Single User Db

Project	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		

Site	SECTION 26 T8S, R16E, SEC 26 T8S R16E				
Site Position:		Northing:	7,204,000.00 ft	Latitude:	40° 5' 18.051 N
From:	Lat/Long	Easting:	2,034,000.00 ft	Longitude:	110° 5' 35.383 W
Position Uncertainty:	0.0 ft	Slot Radius:	"	Grid Convergence:	0.90 °

Well	O-25-8-16, SHL LAT: 40 05 27.13, LONG: -110 04 46.71					
Well Position	+N/-S	0.0 ft	Northing:	7,204,978.27 ft	Latitude:	40° 5' 27.130 N
	+E/-W	0.0 ft	Easting:	2,037,767.60 ft	Longitude:	110° 4' 46.710 W
Position Uncertainty		0.0 ft	Wellhead Elevation:	5,490.0 ft	Ground Level:	5,478.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	2009/09/22	11.53	65.88	52,494

Design	Actual				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
	0.0	0.0	0.0	134.62	

Survey Program	Date	2011/02/01			
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description	
323.0	6,720.0	Survey #1 (Wellbore #1)	MWD	MWD - Standard	

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
323.0	1.70	134.60	323.0	-3.4	3.4	4.8	0.53	0.53	0.00
354.0	2.00	133.60	353.9	-4.1	4.1	5.8	0.97	0.97	-3.23
384.0	2.30	131.50	383.9	-4.8	5.0	6.9	1.03	1.00	-7.00
415.0	2.20	137.50	414.9	-5.7	5.8	8.1	0.83	-0.32	19.35
445.0	2.00	137.00	444.9	-6.5	6.6	9.2	0.67	-0.67	-1.67
476.0	1.90	131.60	475.9	-7.2	7.3	10.3	0.67	-0.32	-17.42
507.0	2.30	125.50	506.8	-7.9	8.2	11.4	1.48	1.29	-19.68
537.0	2.30	130.70	536.8	-8.7	9.2	12.6	0.70	0.00	17.33
568.0	2.50	128.50	567.8	-9.5	10.2	13.9	0.71	0.65	-7.10
599.0	2.60	122.20	598.8	-10.3	11.3	15.3	0.96	0.32	-20.32
629.0	3.20	126.10	628.7	-11.1	12.5	16.8	2.10	2.00	13.00
660.0	3.60	124.60	659.7	-12.2	14.0	18.6	1.32	1.29	-4.84



PayZone Directional Services, LLC.

Survey Report



Company: NEWFIELD EXPLORATION
 Project: USGS Myton SW (UT)
 Site: SECTION 26 T8S, R16E
 Well: O-25-8-16
 Wellbore: Wellbore #1
 Design: Actual

Local Co-ordinate Reference: Well O-25-8-16
 TVD Reference: O-25-8-16 @ 5490.0ft (Newfield Rig #1)
 MD Reference: O-25-8-16 @ 5490.0ft (Newfield Rig #1)
 North Reference: True
 Survey Calculation Method: Minimum Curvature
 Database: EDM 2003.21 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
690.0	4.20	123.10	689.6	-13.3	15.7	20.6	2.03	2.00	-5.00
721.0	4.50	122.80	720.5	-14.6	17.7	22.9	0.97	0.97	-0.97
752.0	4.60	124.50	751.4	-16.0	19.8	25.3	0.54	0.32	5.48
782.0	5.00	125.90	781.3	-17.4	21.8	27.8	1.39	1.33	4.67
813.0	5.40	126.90	812.2	-19.1	24.1	30.5	1.32	1.29	3.23
857.0	5.90	127.70	856.0	-21.7	27.5	34.8	1.15	1.14	1.82
901.0	6.60	129.10	899.7	-24.7	31.3	39.6	1.63	1.59	3.18
945.0	7.10	130.80	943.4	-28.1	35.3	44.8	1.23	1.14	3.86
989.0	7.70	132.20	987.0	-31.8	39.5	50.5	1.42	1.36	3.18
1,033.0	7.90	132.70	1,030.6	-35.9	43.9	56.5	0.48	0.45	1.14
1,077.0	8.70	132.60	1,074.1	-40.2	48.6	62.8	1.82	1.82	-0.23
1,121.0	9.30	135.90	1,117.6	-45.0	53.5	69.7	1.80	1.36	7.50
1,165.0	10.10	135.80	1,161.0	-50.3	58.7	77.1	1.82	1.82	-0.23
1,209.0	10.20	136.90	1,204.3	-55.9	64.0	84.8	0.50	0.23	2.50
1,253.0	10.60	138.60	1,247.6	-61.8	69.4	92.8	1.15	0.91	3.86
1,297.0	10.30	138.50	1,290.8	-67.8	74.7	100.7	0.68	-0.68	-0.23
1,341.0	10.20	137.30	1,334.1	-73.6	79.9	108.6	0.54	-0.23	-2.73
1,385.0	10.70	136.50	1,377.4	-79.4	85.4	116.5	1.18	1.14	-1.82
1,429.0	10.60	135.90	1,420.6	-85.3	91.0	124.7	0.34	-0.23	-1.36
1,473.0	10.70	136.50	1,463.9	-91.1	96.6	132.8	0.34	0.23	1.36
1,517.0	10.90	135.70	1,507.1	-97.1	102.3	141.0	0.57	0.45	-1.82
1,561.0	10.90	135.70	1,550.3	-103.0	108.2	149.3	0.00	0.00	0.00
1,605.0	10.80	134.10	1,593.5	-108.9	114.0	157.6	0.72	-0.23	-3.64
1,649.0	11.20	132.30	1,636.7	-114.6	120.1	166.0	1.20	0.91	-4.09
1,693.0	11.20	132.40	1,679.9	-120.4	126.5	174.6	0.04	0.00	0.23
1,737.0	11.40	131.00	1,723.0	-126.1	132.9	183.2	0.77	0.45	-3.18
1,781.0	11.30	130.20	1,766.2	-131.7	139.5	191.8	0.42	-0.23	-1.82
1,825.0	11.51	130.20	1,809.3	-137.4	146.1	200.5	0.48	0.48	0.00
1,869.0	11.51	128.50	1,852.4	-142.9	152.9	209.2	0.77	0.00	-3.86
1,913.0	11.40	129.30	1,895.5	-148.4	159.7	217.9	0.44	-0.25	1.82
1,957.0	11.30	129.40	1,938.7	-153.9	166.4	226.5	0.23	-0.23	0.23
2,001.0	11.70	132.70	1,981.8	-159.7	173.0	235.3	1.75	0.91	7.50
2,045.0	11.60	133.50	2,024.9	-165.7	179.5	244.2	0.43	-0.23	1.82
2,089.0	11.50	134.20	2,068.0	-171.8	185.8	253.0	0.39	-0.23	1.59
2,132.0	11.40	135.20	2,110.1	-177.8	191.9	261.5	0.52	-0.23	2.33
2,176.0	11.50	134.80	2,153.3	-184.0	198.1	270.3	0.29	0.23	-0.91
2,221.0	11.80	134.20	2,197.3	-190.4	204.6	279.3	0.72	0.67	-1.33
2,265.0	12.20	133.80	2,240.4	-196.7	211.2	288.5	0.93	0.91	-0.91
2,309.0	12.30	133.80	2,283.4	-203.2	217.9	297.8	0.23	0.23	0.00
2,353.0	12.00	133.70	2,326.4	-209.6	224.6	307.1	0.68	-0.68	-0.23
2,397.0	12.00	131.70	2,369.4	-215.8	231.3	316.2	0.95	0.00	-4.55
2,441.0	12.40	132.80	2,412.4	-222.1	238.2	325.5	1.05	0.91	2.50
2,485.0	12.90	134.20	2,455.4	-228.7	245.2	335.1	1.33	1.14	3.18
2,529.0	13.30	135.50	2,498.2	-235.7	252.2	345.1	1.13	0.91	2.95
2,573.0	13.30	135.40	2,541.0	-242.9	259.3	355.2	0.05	0.00	-0.23
2,617.0	13.10	134.10	2,583.9	-250.0	266.5	365.3	0.81	-0.45	-2.95
2,661.0	13.40	135.20	2,626.7	-257.1	273.7	375.4	0.89	0.68	2.50
2,705.0	13.60	134.50	2,669.5	-264.3	280.9	385.6	0.59	0.45	-1.59
2,749.0	13.80	134.80	2,712.2	-271.7	288.3	396.1	0.48	0.45	0.68
2,792.0	13.60	135.30	2,754.0	-278.9	295.5	406.2	0.54	-0.47	1.16
2,837.0	13.50	136.30	2,797.8	-286.4	302.9	416.8	0.57	-0.22	2.22
2,881.0	13.20	137.50	2,840.6	-293.9	309.8	426.9	0.93	-0.68	2.73
2,925.0	13.00	136.00	2,883.4	-301.1	316.7	436.9	0.90	-0.45	-3.41
2,969.0	12.20	134.30	2,926.4	-307.9	323.4	446.5	2.00	-1.82	-3.86



PayZone Directional Services, LLC.

Survey Report



Company: NEWFIELD EXPLORATION
 Project: USGS Myton SW (UT)
 Site: SECTION 26 T8S, R16E
 Well: O-25-8-16
 Wellbore: Wellbore #1
 Design: Actual

Local Co-ordinate Reference: Well O-25-8-16
 TVD Reference: O-25-8-16 @ 5490.0ft (Newfield Rig #1)
 MD Reference: O-25-8-16 @ 5490.0ft (Newfield Rig #1)
 North Reference: True
 Survey Calculation Method: Minimum Curvature
 Database: EDM 2003.21 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N-S (ft)	+E-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
3,013.0	11.70	133.20	2,969.4	-314.2	330.0	455.6	1.25	-1.14	-2.50
3,057.0	12.30	131.40	3,012.5	-320.4	336.8	464.7	1.61	1.36	-4.09
3,101.0	12.60	130.30	3,055.4	-326.6	344.0	474.2	0.87	0.68	-2.50
3,145.0	13.20	130.40	3,098.3	-332.9	351.4	484.0	1.36	1.36	0.23
3,189.0	14.30	132.80	3,141.0	-339.9	359.3	494.5	2.82	2.50	5.45
3,233.0	15.30	135.60	3,183.6	-347.7	367.3	505.7	2.79	2.27	6.36
3,277.0	15.60	134.50	3,226.0	-356.0	375.6	517.4	0.95	0.68	-2.50
3,321.0	15.50	133.80	3,268.4	-364.2	384.0	529.2	0.48	-0.23	-1.59
3,366.0	14.80	134.30	3,311.8	-372.4	392.5	541.0	1.58	-1.56	1.11
3,410.0	14.60	133.20	3,354.4	-380.1	400.6	552.1	0.78	-0.45	-2.50
3,454.0	14.60	131.70	3,397.0	-387.6	408.7	563.2	0.86	0.00	-3.41
3,498.0	13.50	130.00	3,439.6	-394.6	416.8	573.9	2.67	-2.50	-3.86
3,542.0	12.90	130.00	3,482.5	-401.1	424.5	583.9	1.36	-1.36	0.00
3,586.0	12.80	130.10	3,525.4	-407.4	432.0	593.6	0.23	-0.23	0.23
3,630.0	12.90	130.50	3,568.3	-413.7	439.5	603.4	0.30	0.23	0.91
3,674.0	13.10	130.70	3,611.1	-420.1	447.0	613.3	0.47	0.45	0.45
3,718.0	13.20	131.80	3,654.0	-426.7	454.5	623.3	0.61	0.23	2.50
3,762.0	12.50	129.50	3,696.9	-433.1	461.9	633.0	1.97	-1.59	-5.23
3,806.0	12.20	129.50	3,739.9	-439.1	469.2	642.4	0.68	-0.68	0.00
3,850.0	12.60	130.90	3,782.8	-445.2	476.4	651.8	1.14	0.91	3.18
3,894.0	12.50	129.90	3,825.8	-451.4	483.7	661.3	0.54	-0.23	-2.27
3,938.0	12.70	131.00	3,868.7	-457.6	491.0	670.9	0.71	0.45	2.50
3,982.0	12.90	131.60	3,911.6	-464.1	498.3	680.7	0.55	0.45	1.36
4,026.0	12.80	133.50	3,954.5	-470.7	505.5	690.4	0.99	-0.23	4.32
4,070.0	12.60	133.80	3,997.5	-477.4	512.5	700.1	0.48	-0.45	0.68
4,114.0	12.10	135.80	4,040.4	-484.0	519.2	709.5	1.50	-1.14	4.55
4,158.0	11.90	137.60	4,083.5	-490.6	525.5	718.7	0.96	-0.45	4.09
4,202.0	11.70	136.90	4,126.6	-497.2	531.6	727.6	0.56	-0.45	-1.59
4,246.0	11.80	135.50	4,169.6	-503.7	537.8	736.6	0.69	0.23	-3.18
4,290.0	11.50	135.30	4,212.7	-510.0	544.0	745.5	0.69	-0.68	-0.45
4,334.0	11.60	136.30	4,255.8	-516.4	550.2	754.3	0.51	0.23	2.27
4,378.0	12.60	137.60	4,298.9	-523.1	556.5	763.5	2.36	2.27	2.95
4,422.0	13.30	138.40	4,341.7	-530.4	563.1	773.3	1.64	1.59	1.82
4,466.0	13.50	140.30	4,384.5	-538.2	569.7	783.5	1.10	0.45	4.32
4,510.0	13.40	139.90	4,427.3	-546.0	576.3	793.7	0.31	-0.23	-0.91
4,554.0	13.30	139.60	4,470.1	-553.8	582.8	803.8	0.28	-0.23	-0.68
4,598.0	12.90	140.60	4,513.0	-561.4	589.2	813.7	1.04	-0.91	2.27
4,642.0	12.30	139.30	4,555.9	-568.8	595.4	823.3	1.51	-1.36	-2.95
4,686.0	11.70	140.80	4,599.0	-575.8	601.3	832.4	1.54	-1.36	3.41
4,730.0	11.30	141.00	4,642.1	-582.6	606.8	841.1	0.91	-0.91	0.45
4,774.0	11.20	139.50	4,685.3	-589.2	612.3	849.7	0.70	-0.23	-3.41
4,818.0	10.80	139.90	4,728.4	-595.6	617.7	858.0	0.93	-0.91	0.91
4,862.0	10.90	139.80	4,771.7	-601.9	623.1	866.3	0.23	0.23	-0.23
4,906.0	11.20	137.00	4,814.8	-608.2	628.7	874.7	1.40	0.68	-6.36
4,950.0	11.70	135.60	4,858.0	-614.5	634.7	883.4	1.30	1.14	-3.18
4,994.0	11.20	134.10	4,901.1	-620.7	640.9	892.1	1.32	-1.14	-3.41
5,038.0	10.60	134.50	4,944.3	-626.5	646.8	900.5	1.37	-1.36	0.91
5,082.0	10.30	134.30	4,987.6	-632.1	652.5	908.4	0.69	-0.68	-0.45
5,126.0	10.80	135.70	5,030.8	-637.8	658.2	916.5	1.28	1.14	3.18
5,170.0	11.60	136.90	5,074.0	-644.0	664.1	925.0	1.89	1.82	2.73
5,214.0	12.40	136.30	5,117.0	-650.6	670.4	934.2	1.84	1.82	-1.36
5,258.0	12.30	137.78	5,160.0	-657.5	676.8	943.6	0.75	-0.23	3.36
5,302.0	12.40	137.60	5,203.0	-664.5	683.2	953.0	0.24	0.23	-0.41
5,346.0	12.60	136.50	5,245.9	-671.4	689.7	962.5	0.71	0.45	-2.50



PayZone Directional Services, LLC.

Survey Report



Company: NEWFIELD EXPLORATION
 Project: USGS Myton SW (UT)
 Site: SECTION 26 T8S, R16E
 Well: O-25-8-16
 Wellbore: Wellbore #1
 Design: Actual

Local Co-ordinate Reference: Well O-25-8-16
 TVD Reference: O-25-8-16 @ 5490.0ft (Newfield Rig #1)
 MD Reference: O-25-8-16 @ 5490.0ft (Newfield Rig #1)
 North Reference: True
 Survey Calculation Method: Minimum Curvature
 Database: EDM 2003.21 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
5,390.0	13.30	132.70	5,288.8	-678.3	696.7	972.4	2.50	1.59	-8.64	
5,403.7	13.33	132.04	5,302.2	-680.5	699.0	975.5	1.13	0.21	-4.80	
O-25-8-16 TGT										
5,434.0	13.40	130.60	5,331.6	-685.1	704.3	982.5	1.13	0.23	-4.76	
5,478.0	13.40	131.30	5,374.4	-691.8	712.0	992.7	0.37	0.00	1.59	
5,522.0	13.40	131.80	5,417.2	-698.5	719.6	1,002.9	0.26	0.00	1.14	
5,566.0	13.20	131.90	5,460.1	-705.3	727.2	1,013.0	0.46	-0.45	0.23	
5,610.0	13.50	134.50	5,502.9	-712.2	734.6	1,023.1	1.53	0.68	5.91	
5,654.0	13.90	136.30	5,545.6	-719.7	741.9	1,033.5	1.33	0.91	4.09	
5,698.0	14.30	138.80	5,588.3	-727.6	749.1	1,044.2	1.66	0.91	5.68	
5,742.0	14.40	140.30	5,630.9	-735.9	756.2	1,055.1	0.87	0.23	3.41	
5,786.0	14.60	140.60	5,673.5	-744.4	763.2	1,066.1	0.49	0.45	0.68	
5,830.0	14.80	140.60	5,716.1	-753.0	770.3	1,077.2	0.45	0.45	0.00	
5,874.0	15.00	141.20	5,758.6	-761.8	777.4	1,088.4	0.57	0.45	1.36	
5,918.0	15.10	141.20	5,801.1	-770.7	784.6	1,099.8	0.23	0.23	0.00	
5,962.0	14.60	142.00	5,843.6	-779.5	791.6	1,111.0	1.23	-1.14	1.82	
6,006.0	14.20	140.30	5,886.2	-788.0	798.4	1,121.8	1.32	-0.91	-3.86	
6,050.0	13.90	140.10	5,928.9	-796.2	805.3	1,132.5	0.69	-0.68	-0.45	
6,094.0	13.10	139.40	5,971.7	-804.1	811.9	1,142.7	1.86	-1.82	-1.59	
6,138.0	11.40	138.30	6,014.7	-811.1	818.0	1,152.0	3.90	-3.86	-2.50	
6,182.0	10.90	137.10	6,057.9	-817.4	823.8	1,160.5	1.25	-1.14	-2.73	
6,226.0	10.90	137.00	6,101.1	-823.5	829.4	1,168.8	0.04	0.00	-0.23	
6,270.0	10.30	138.50	6,144.3	-829.5	834.9	1,176.9	1.50	-1.36	3.41	
6,314.0	9.90	138.00	6,187.6	-835.2	840.0	1,184.6	0.93	-0.91	-1.14	
6,358.0	9.50	138.20	6,231.0	-840.8	845.0	1,192.0	0.91	-0.91	0.45	
6,402.0	9.50	137.90	6,274.4	-846.2	849.8	1,199.2	0.11	0.00	-0.68	
6,446.0	9.80	136.80	6,317.8	-851.6	854.8	1,206.6	0.80	0.68	-2.50	
6,490.0	10.20	138.10	6,361.1	-857.2	860.0	1,214.2	1.04	0.91	2.95	
6,578.0	10.15	137.61	6,447.7	-868.7	870.4	1,229.8	0.11	-0.06	-0.56	
6,622.0	9.62	134.05	6,491.1	-874.2	875.7	1,237.3	1.84	-1.20	-8.09	
6,655.0	8.80	133.80	6,523.7	-877.8	879.5	1,242.6	2.49	-2.48	-0.76	
6,720.0	8.80	133.80	6,587.9	-884.7	886.7	1,252.5	0.00	0.00	0.00	

Wellbore Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude
O-25-8-16 TGT	0.00	0.00	5,300.0	-691.9	701.2	7,204,297.57	2,038,479.67	40° 5' 20.291 N	110° 4' 37.688 W
- hit/miss target									
- Shape									
- actual wellpath misses by 11.9ft at 5403.7ft MD (5302.2 TVD, -680.5 N, 699.0 E)									
- Circle (radius 75.0)									

Checked By: _____ Approved By: _____ Date: _____





Project: USGS Myton SW (UT)
 Site: SECTION 26 T8S, R16E
 Well: O-25-8-16
 Wellbore: Wellbore #1
 SURVEY: Actual

FINAL SURVEY REPORT



Azimuths to True North
 Magnetic North: 11.53°

Magnetic Field
 Strength: 52494.5snT
 Dip Angle: 65.88°
 Date: 2009/09/22
 Model: IGRF200510

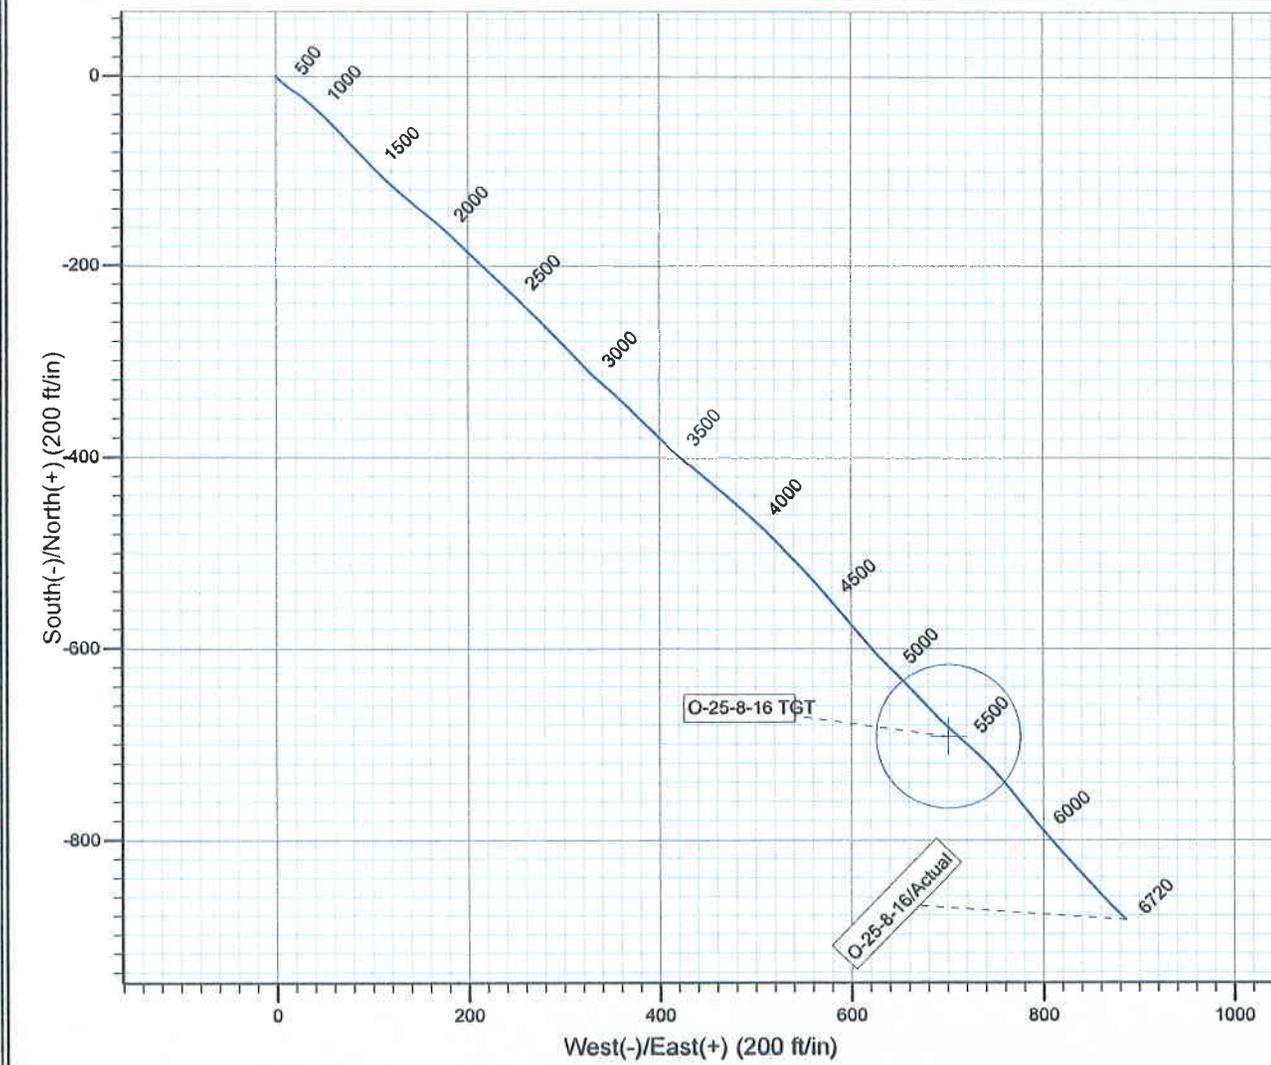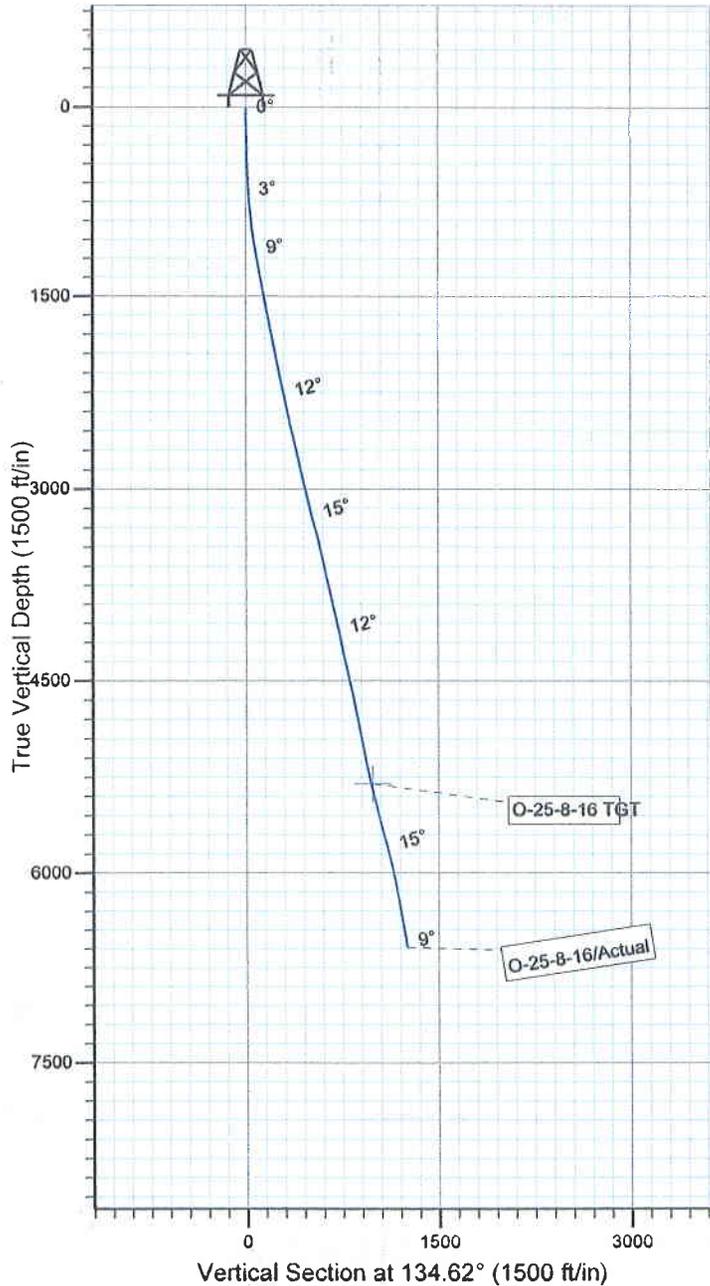

Design: Actual (O-25-8-16/Wellbore #1)



Created By: *Jim Hudson* Date: 13:42, February 01 2011
 THIS SURVEY IS CORRECT TO THE BEST OF MY
 KNOWLEDGE AND IS SUPPORTED BY ACTUAL FIELD DATA.

Daily Activity Report**Format For Sundry****MON BUTTE O-25-8-16****11/1/2010 To 3/28/2011****MON BUTTE O-25-8-16****Waiting on Cement****Date:** 1/17/2011

Ross #21 at 310. Days Since Spud - yield. Returned 5bbls to pit, bump plug to 405 psi, BLM and State were notified of spud via email. - @ 302.28'. On 1-14-11 cement w/ BJ w/ 160 sks of class G+2%kcl+.25#CF mixed @ 15.8ppg and 1.17 - On 1-12-11 Ross # 21 spud and drilled 310' of 12 1/4" hole, P/U and run 7 jts of 8 5/8" casing set

Daily Cost: \$0**Cumulative Cost:** \$50,269**MON BUTTE O-25-8-16****Drill 7 7/8" hole with fresh water****Date:** 1/25/2011

NDSI SS #1 at 1934. 1 Days Since Spud - & Blind rams & choke valves to 2000#s for 10 min & Casing to 1500#s for 30 min - Held safety mtg w/ B&C Quick test & Test upper kelly valve & floor valve Pipe rams Inside valves - PU MI 616 bit Hunting MM Xo NMDC GS Index sub Xo Pony NMDC 26 HWDP TIH & Tag @ 280' - XO check valve on koomey - Drill 280' to 1934' WOB= 15 GPM 430 RPMS= 191 ROP= 150' pr hr - Rig down & Move rig & RU w/Liddell Trucking to the GMB O-25-8-16 on 1/24/11

Daily Cost: \$0**Cumulative Cost:** \$101,459**MON BUTTE O-25-8-16****Drill 7 7/8" hole with fresh water****Date:** 1/26/2011

NDSI SS #1 at 4795. 2 Days Since Spud - Rig serv - Drill 1934' to 3166' WOB= 20 GPM 430 RPMS= 191 ROP= 176' pr hr - Drill 3166' to 4795' WOB= 20 GPM 430 RPMS= 191 ROP= 98' pr hr

Daily Cost: \$0**Cumulative Cost:** \$131,017**MON BUTTE O-25-8-16****Rig Repair****Date:** 1/27/2011

NDSI SS #1 at 5731. 3 Days Since Spud - Work on mud pump & wait for daylight to get new pump - Drill 5009' to 5732 WOB= 20 GPM 430 RPMS= 191 ROP= 65' pr hr - Rig serv & Tighten belts up on mud pump - Drill 4795' to 5009' WOB= 20 GPM 430 RPMS= 191 ROP= 107' pr hr

Daily Cost: \$0**Cumulative Cost:** \$172,401**MON BUTTE O-25-8-16****Drill 7 7/8" hole with fresh water****Date:** 1/28/2011

NDSI SS #1 at 6467. 4 Days Since Spud - Wait on Truckes to change out Mud pump - Move out F-1000 mud pump and set PZ-7 mud pump - Drill 7 7/8" hole f/5732' - 6467' w/ 20 WOB, 320 GPM, 63 ROP, 150 RPMS - Work on PZ-7 change suction and discharge lines to fit rig, Mechanics work on starting engine

Daily Cost: \$0**Cumulative Cost:** \$194,351

MON BUTTE O-25-8-16**Circulate & Condition Hole****Date:** 1/29/2011

NDSI SS #1 at 6720. 5 Days Since Spud - R/U csg run 157jt 5.5 15.5# j-55 LTC-tag -GS set @ 6710.63' KB -FC set @ 6666.98' KB - Circulate csg w/ rig pump - R/U Psi run DISGL/SP/GR suite TD to surface- DSN/SDL/GR/CAL suite TD to 3000' (loggers TD 6715') - Lay down DP,BHA and dir. Tools - Circulate Bottoms up - check flow no flow - Drill 7 7/8" hole f/6500' - 6720' w/ 20 WOB, 320 GPM, 98 ROP, 150 RPMS- TD - Rig service funtion test pipe rams - Drill 7 7/8" hole f/6467' - 6500' w/ 20 WOB, 320 GPM, 63 ROP, 150 RPMS - Test csg rams @ 2000 psi

Daily Cost: \$0**Cumulative Cost:** \$225,008

MON BUTTE O-25-8-16**Wait on Completion****Date:** 1/30/2011

NDSI SS #1 at 6720. 6 Days Since Spud - Clean Mud tanks - Tear down - Nipple down set 5.5 csg slips w/ 110,000# tention - Mixed @ 14.4 ppg yeild @ 1.24 return 30 bbls to pit Bump plug to 1700 psi - yield @ 3.54 Then tail of 420 sk 50:50:2+3%KCL+0.5%EC-1+.25# SK CF+.05#SF+.3SMS+FP-6L - Circulate csg - CMT w/BJ Pump 300 sks PL II +3% KCL +5#CSE+0.5#CF+2#KOL+.5SMS+FP+SF mixed @ 11ppg - Release rig @ 14:00 pm on 1/29/11 **Finalized**

Daily Cost: \$0**Cumulative Cost:** \$358,453

Pertinent Files: [Go to File List](#)

STATE OF UTAH
 DIVISION OF OIL, GAS AND MINING
 ENTITY ACTION FORM - FORM 6

OPERATOR: **NEWFIELD PRODUCTION COMPANY**
 ADDRESS: **RT. 3 BOX 3630**
MYTON, UT 84052


OPERATOR ACCT. NO. **N2695**

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION				COUNTY	SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG			
A	99999	17921	4301350333	UTE TRIBAL 7-27-4-3	SWNE	27	4S	3W	DUCHESNE	1/4/2011	1/13/2011
WELL 1 COMMENTS: GRRV											
B	99999	17400	4301350234	Greater Mon Butte FEDERAL D-25-8-16	SESW	24 28	8S	16E	DUCHESNE	1/11/2010	1/13/2011
GRRV BHL = Sec 25 NWNW											
A	99999	17922	4301350334	UTE TRIBAL 8-27-4-3	SENE	27	4S	3W	DUCHESNE	1/10/2011	1/13/2011
GRRV											
B	99999	17400	4301350238	Greater Mon Butte FEDERAL S-26-8-16	SESE	26	8S	16E	DUCHESNE	1/10/2011	1/13/2011
GRRV BHL = SESE											
B	99999	17400	4301350236	Greater Mon Butte FEDERAL O-25-8-16	SENE	26 28	8S	16E	DUCHESNE	1/9/2011	1/13/2011
GRRV BHL = Sec 25 SWNW											
A	99999	17923	4301350335	UTE TRIBAL 9-27-4-3	NESE	27	4S	3W	DUCHESNE	1/7/2011	1/13/2011
GRRV											

- ACTION CODES (See instructions on back of form)
- A - 1 new entity for new well (single well only)
 - B - well to existing entity (group or unit well)
 - C - from one existing entity to another existing entity
 - D - well from one existing entity to a new entity
 - E - other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

RECEIVED
 JAN 11 2011

Signature: 
 Jentri Park
 Production Clerk
 01/11/11