

**STATE OF UTAH**  
 DEPARTMENT OF NATURAL RESOURCES  
 DIVISION OF OIL, GAS AND MINING

FORM 3  
 AMENDED REPORT

<b>APPLICATION FOR PERMIT TO DRILL</b>				<b>1. WELL NAME and NUMBER</b> Ute Tribal 9-27-4-3		
<b>2. TYPE OF WORK</b> DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>				<b>3. FIELD OR WILDCAT</b> UNDESIGNATED		
<b>4. TYPE OF WELL</b> Oil Well <input type="checkbox"/> Coalbed Methane Well: NO <input type="checkbox"/>				<b>5. UNIT or COMMUNITIZATION AGREEMENT NAME</b>		
<b>6. NAME OF OPERATOR</b> NEWFIELD PRODUCTION COMPANY				<b>7. OPERATOR PHONE</b> 435 646-4825		
<b>8. ADDRESS OF OPERATOR</b> Rt 3 Box 3630 , Myton, UT, 84052				<b>9. OPERATOR E-MAIL</b> mcrozier@newfield.com		
<b>10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE)</b> 14-20-H62-6154		<b>11. MINERAL OWNERSHIP</b> FEDERAL <input type="checkbox"/> INDIAN <input checked="" type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>		<b>12. SURFACE OWNERSHIP</b> FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>		
<b>13. NAME OF SURFACE OWNER (if box 12 = 'fee')</b> Moon Live Stock LLC				<b>14. SURFACE OWNER PHONE (if box 12 = 'fee')</b>		
<b>15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')</b> HC 64 Box 102, Duchesne, UT 84021				<b>16. SURFACE OWNER E-MAIL (if box 12 = 'fee')</b>		
<b>17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')</b>		<b>18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS</b> YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>		<b>19. SLANT</b> VERTICAL <input checked="" type="checkbox"/> DIRECTIONAL <input type="checkbox"/> HORIZONTAL <input type="checkbox"/>		
<b>20. LOCATION OF WELL</b>	<b>FOOTAGES</b>	<b>QTR-QTR</b>	<b>SECTION</b>	<b>TOWNSHIP</b>	<b>RANGE</b>	<b>MERIDIAN</b>
<b>LOCATION AT SURFACE</b>	2030 FSL 746 FEL	NESE	27	4.0 S	3.0 W	U
<b>Top of Uppermost Producing Zone</b>	2030 FSL 746 FEL	NESE	27	4.0 S	3.0 W	U
<b>At Total Depth</b>	2030 FSL 746 FEL	NESE	27	4.0 S	3.0 W	U
<b>21. COUNTY</b> DUCHESNE		<b>22. DISTANCE TO NEAREST LEASE LINE (Feet)</b> 746		<b>23. NUMBER OF ACRES IN DRILLING UNIT</b> 40		
		<b>25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed)</b> 1344		<b>26. PROPOSED DEPTH</b> MD: 6760 TVD: 6760		
<b>27. ELEVATION - GROUND LEVEL</b> 5659		<b>28. BOND NUMBER</b> RLB0010462		<b>29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE</b> 43-7478		

**ATTACHMENTS**

**VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES**

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input checked="" type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)	<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER
<input type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)	<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP

<b>NAME</b> Mandie Crozier	<b>TITLE</b> Regulatory Tech	<b>PHONE</b> 435 646-4825
<b>SIGNATURE</b>	<b>DATE</b> 04/29/2010	<b>EMAIL</b> mcrozier@newfield.com
<b>API NUMBER ASSIGNED</b> 43013503350000	<b>APPROVAL</b>   Permit Manager	

**Proposed Hole, Casing, and Cement**

<b>String</b>	<b>Hole Size</b>	<b>Casing Size</b>	<b>Top (MD)</b>	<b>Bottom (MD)</b>		
Prod	7.875	5.5	0	6760		
<b>Pipe</b>	<b>Grade</b>	<b>Length</b>	<b>Weight</b>			
	Grade J-55 LT&C	6760	15.5			


**Proposed Hole, Casing, and Cement**

<b>String</b>	<b>Hole Size</b>	<b>Casing Size</b>	<b>Top (MD)</b>	<b>Bottom (MD)</b>		
Surf	12.25	8.625	0	300		
<b>Pipe</b>	<b>Grade</b>	<b>Length</b>	<b>Weight</b>			
	Grade J-55 ST&C	300	24.0			

# T4S, R3W, U.S.B.&M.

## NEWFIELD EXPLORATION COMPANY

WELL LOCATION, 9-27-4-3, LOCATED AS SHOWN IN THE NE 1/4 SE 1/4 OF SECTION 27, T4S, R3W, U.S.B.&M. DUCHESNE COUNTY, UTAH.

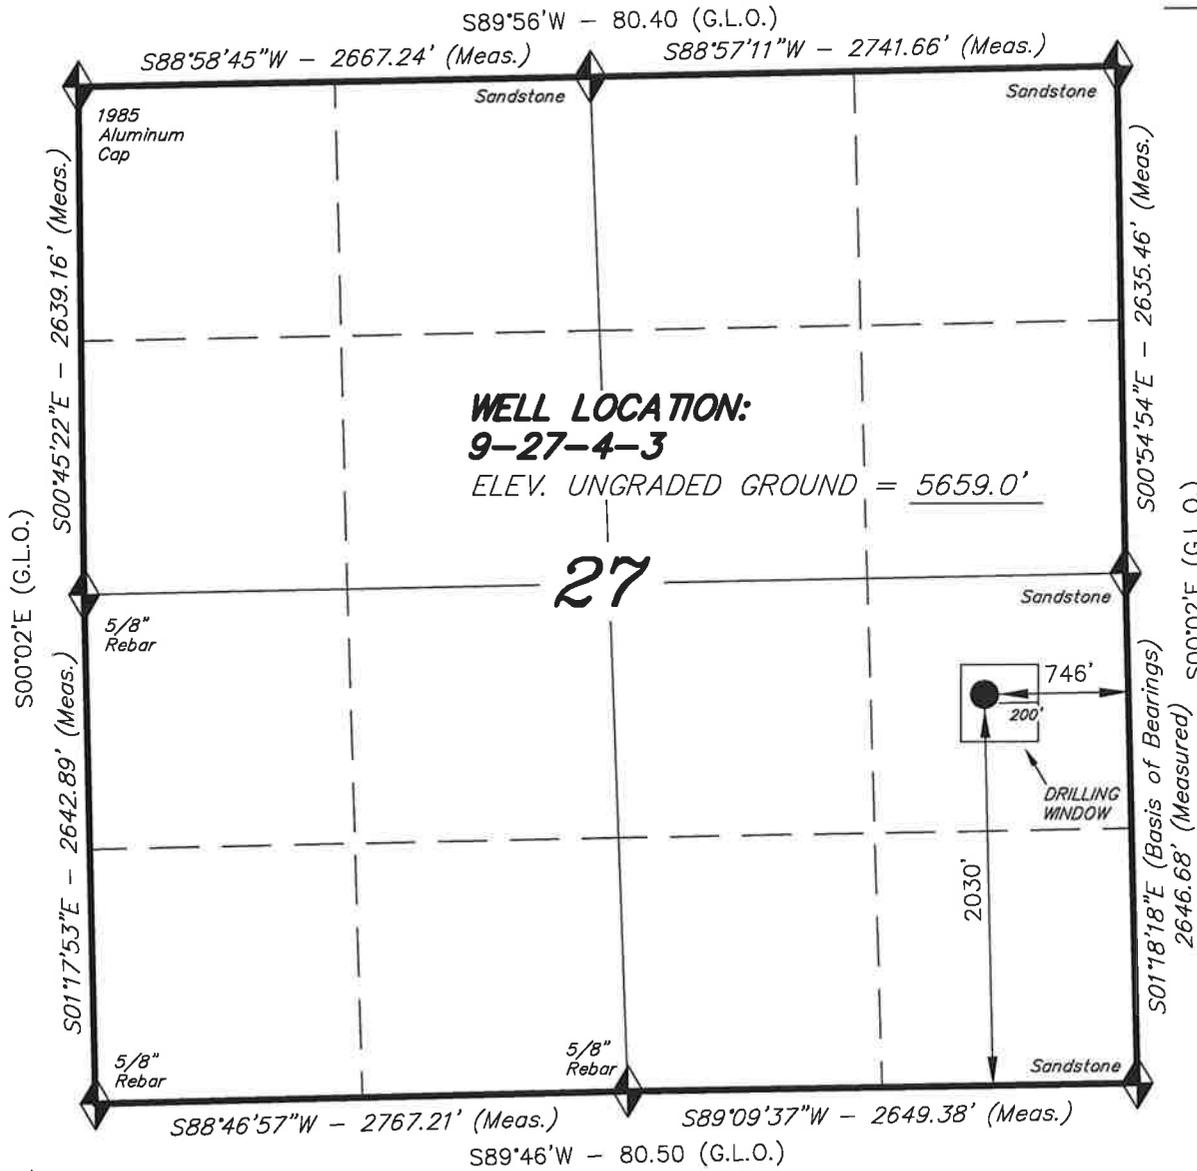

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

REGISTERED LAND SURVEYOR  
 STACY W. STEWART  
 REGISTRATION No. 189377  
 STATE OF UTAH

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV; Elevations are base on LOCATION: an N.G.S. OPUS Correction. LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

**9-27-4-3**  
 (Surface Location) NAD 83  
 LATITUDE = 40° 06' 15.25"  
 LONGITUDE = 110° 12' 06.76"

### TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078  
 (435) 781-2501

DATE SURVEYED: 03-13-10	SURVEYED BY: S.V.
DATE DRAWN: 03-15-10	DRAWN BY: F.T.M.
REVISED:	SCALE: 1" = 1000'

**MEMORANDUM  
of  
EASEMENT, RIGHT-OF-WAY  
and  
SURFACE USE AGREEMENT**

This Easement, Right-of-Way and Surface Use Agreement ("Agreement") is entered into this 17<sup>th</sup> day of March, 2010 by and between **Moon Live Stock, LLC, whose address is HC 64 box 102, Duchesne, Utah 84021**, ("Surface Owner," whether one or more) and Newfield Production Company, a Texas corporation ("NEWFIELD"), with offices at 1001 Seventeenth Street, Suite 2000, Denver, Colorado 80202, covering certain lands, (the "Lands") situated in Duchesne County, Utah described as follows:

**Township 4 South, Range 3 West**

**Section 27: All, being 640 acres more or less.**

Duchesne County, Utah

For and in consideration of the sum of ten dollars (\$10.00), and other valuable consideration, the receipt and sufficiency of which are hereby acknowledged, the undersigned hereby agree to the terms and provisions set forth as follows:

1. **Compensation for Well; Release of All Claims**

NEWFIELD shall pay to Surface Owner the sum as set forth in and according to the terms of that certain Letter Agreement for Easement, Right-of Way and Surface Use by and between Surface Owner and NEWFIELD, dated March 17, 2010 as full payment and satisfaction for any and all detriment, depreciation, injury or damage of any nature to the Lands or growing crops thereon that may occur as a result of NEWFIELD's drilling or completion operations or its continuing activities for the production or transportation of oil, gas, or other hydrocarbons or products associated with the foregoing including, but not limited to, surface use, access, pipelines, gathering lines, pipeline interconnections, and any and all other reasonable or customary uses of land related to said operations or activities.

2. **Grant of Right of Way and Easement**

Surface Owner hereby grants, bargains, leases, assigns, and conveys to NEWFIELD an easement and right-of-way for the purpose of construction, using and maintaining access roads, locations for surface equipment and subsurface gathering lines for each well drilled upon the Lands, pipelines, and pipeline interconnections for two years from date of this agreement and so long thereafter as NEWFIELD's oil and gas leases remain in effect.

This Agreement shall be binding upon the respective heirs, executors, administrators, successors, and assigns of the undersigned.

These Parties hereto have executed this document effective as of the day first above written.

MOON LIVE STOCK, LLC

NEWFIELD PRODUCTION COMPANY

By: [Signature]  
Ken Moon, private surface owner

By: \_\_\_\_\_  
Daniel W. Shewmake,  
Vice President-Development

By: [Signature]  
Todd Moon, private surface owner


By: [Signature]  
Russell Moon

STATE OF UTAH )  
 )ss  
COUNTY OF Duchesne )

This instrument was acknowledged before me this 24th day of March, 2010 by **Moon Live Stock LLC, private surface owners.**

Witness my hand and official seal.

My commission expires 9/8/2013

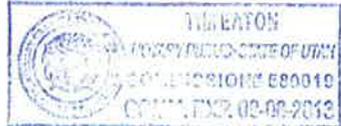[Signature]  
Notary Public  


STATE OF COLORADO )  
 )ss  
COUNTY OF Denver )

This instrument was acknowledged before me this \_\_\_\_\_, 2010 by **Daniel W. Shewmake, Vice President-Development** a Texas corporation, on behalf of the corporation.

Witness my hand and official seal.

\_\_\_\_\_  
Notary Public

My commission expires \_\_\_\_\_

NEWFIELD PRODUCTION COMPANY  
UTE TRIBAL 9-27-4-3  
NE/SE SECTION 27, T4S, R3W  
DUCHESNE COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0' – 1670'
Green River	1670'
Wasatch	6460'
<b>Proposed TD</b>	<b>6760'</b>

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil) 1670' – 6460'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO <sub>3</sub> ) (mg/l)
Dissolved Bicarbonate (NaHCO <sub>3</sub> ) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO <sub>4</sub> ) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. **Casing Design: Ute Tribal 9-27-4-3**

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	300'	24.0	J-55	STC	2,950	1,370	244,000
						17.53	14.35	33.89
Prod casing 5-1/2"	0'	6,760'	15.5	J-55	LTC	4,810	4,040	217,000
						2.24	1.88	2.07

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg  
 Pore pressure at surface casing shoe = 8.33 ppg  
 Pore pressure at prod casing shoe = 8.33 ppg  
 Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. **Cementing Design: Ute Tribal 9-27-4-3**

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft <sup>3</sup> /sk)
			ft <sup>3</sup>			
Surface casing	300'	Class G w/ 2% CaCl	138	30%	15.8	1.17
			161			
Prod casing Lead	4,760'	Prem Lite II w/ 10% gel + 3% KCl	329	30%	11.0	3.26
			1072			
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363	30%	14.3	1.24
			451			

- \*Actual volume pumped will be 15% over the caliper log
- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
  - Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ±350 feet will be drilled with an air/mist system. The air rig is equipped with a 6 ½" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ±350 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated

bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the third quarter of 2010, and take approximately seven (7) days from spud to rig release.

# 2-M SYSTEM

Blowout Prevention Equipment Systems


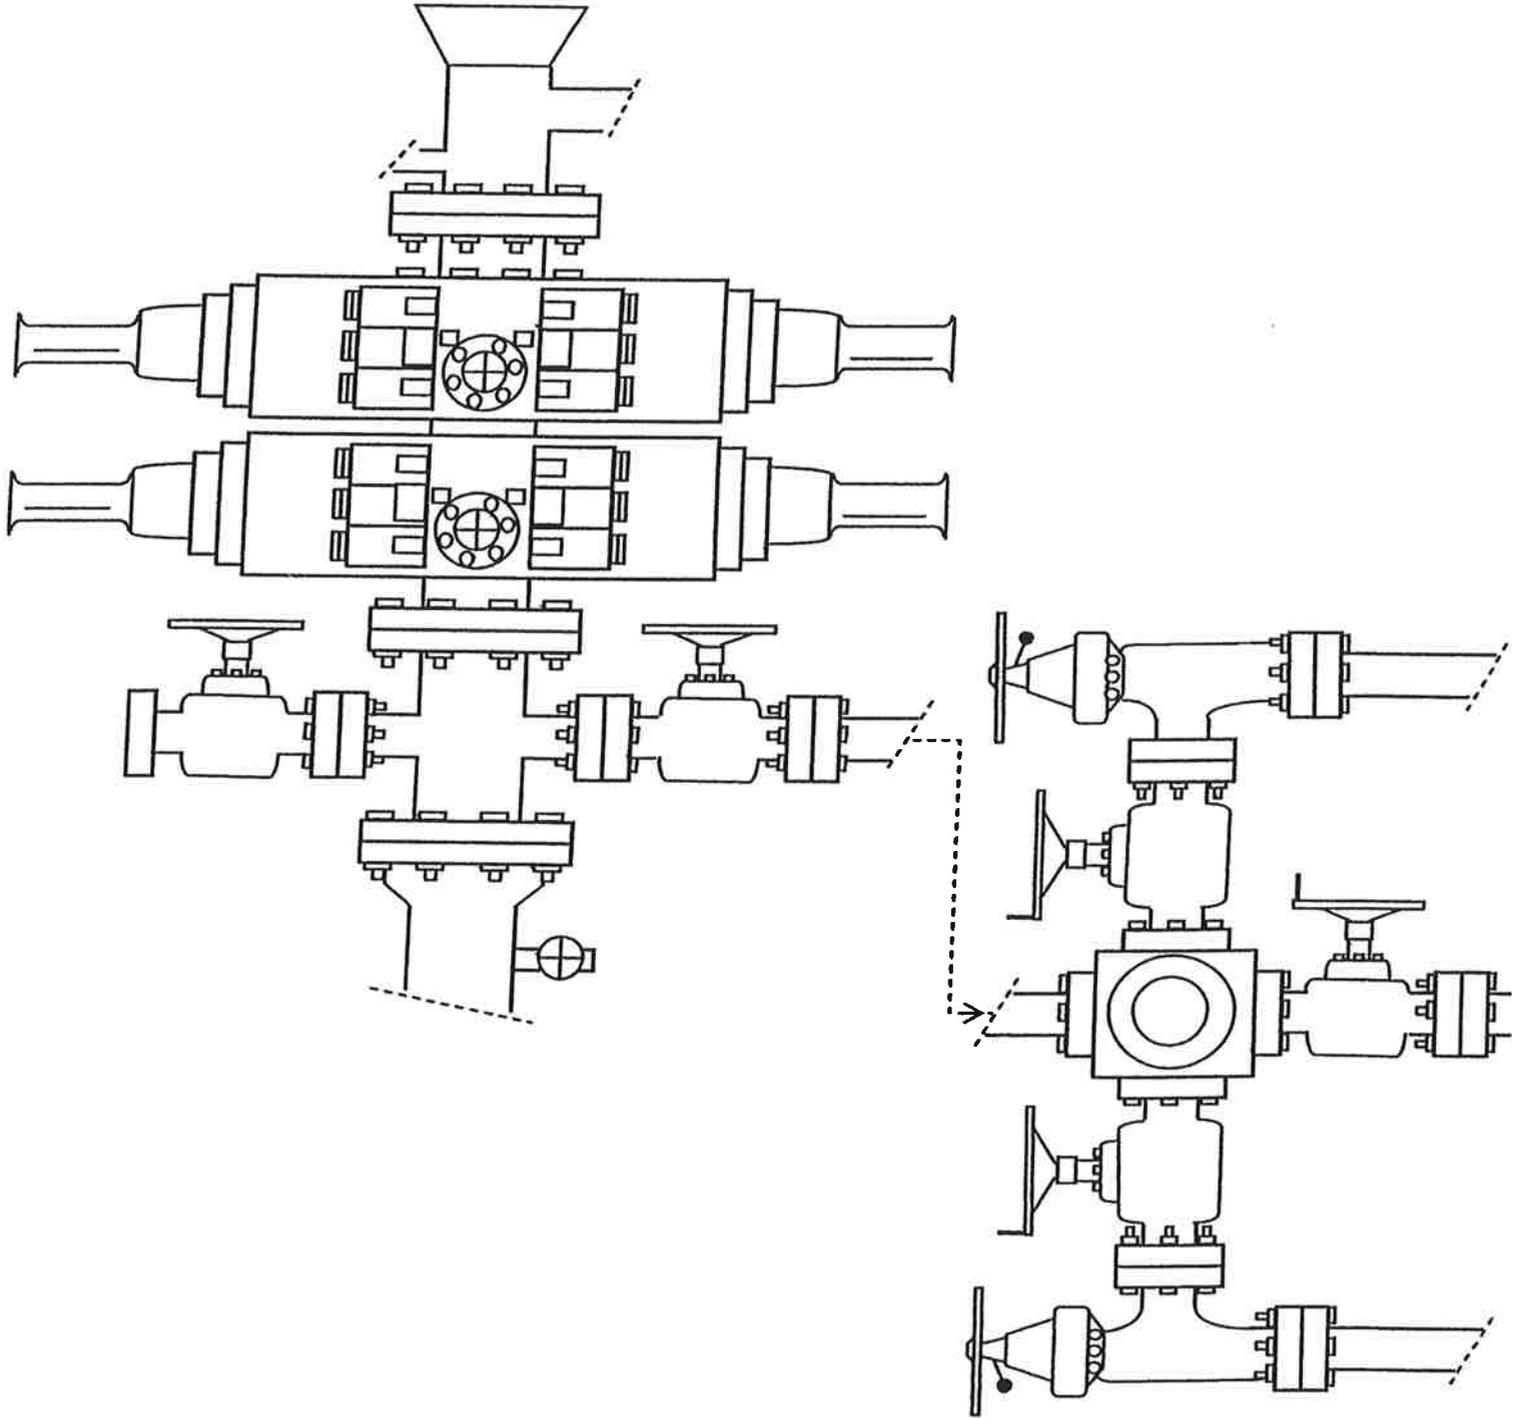


EXHIBIT C

# Access Road Map

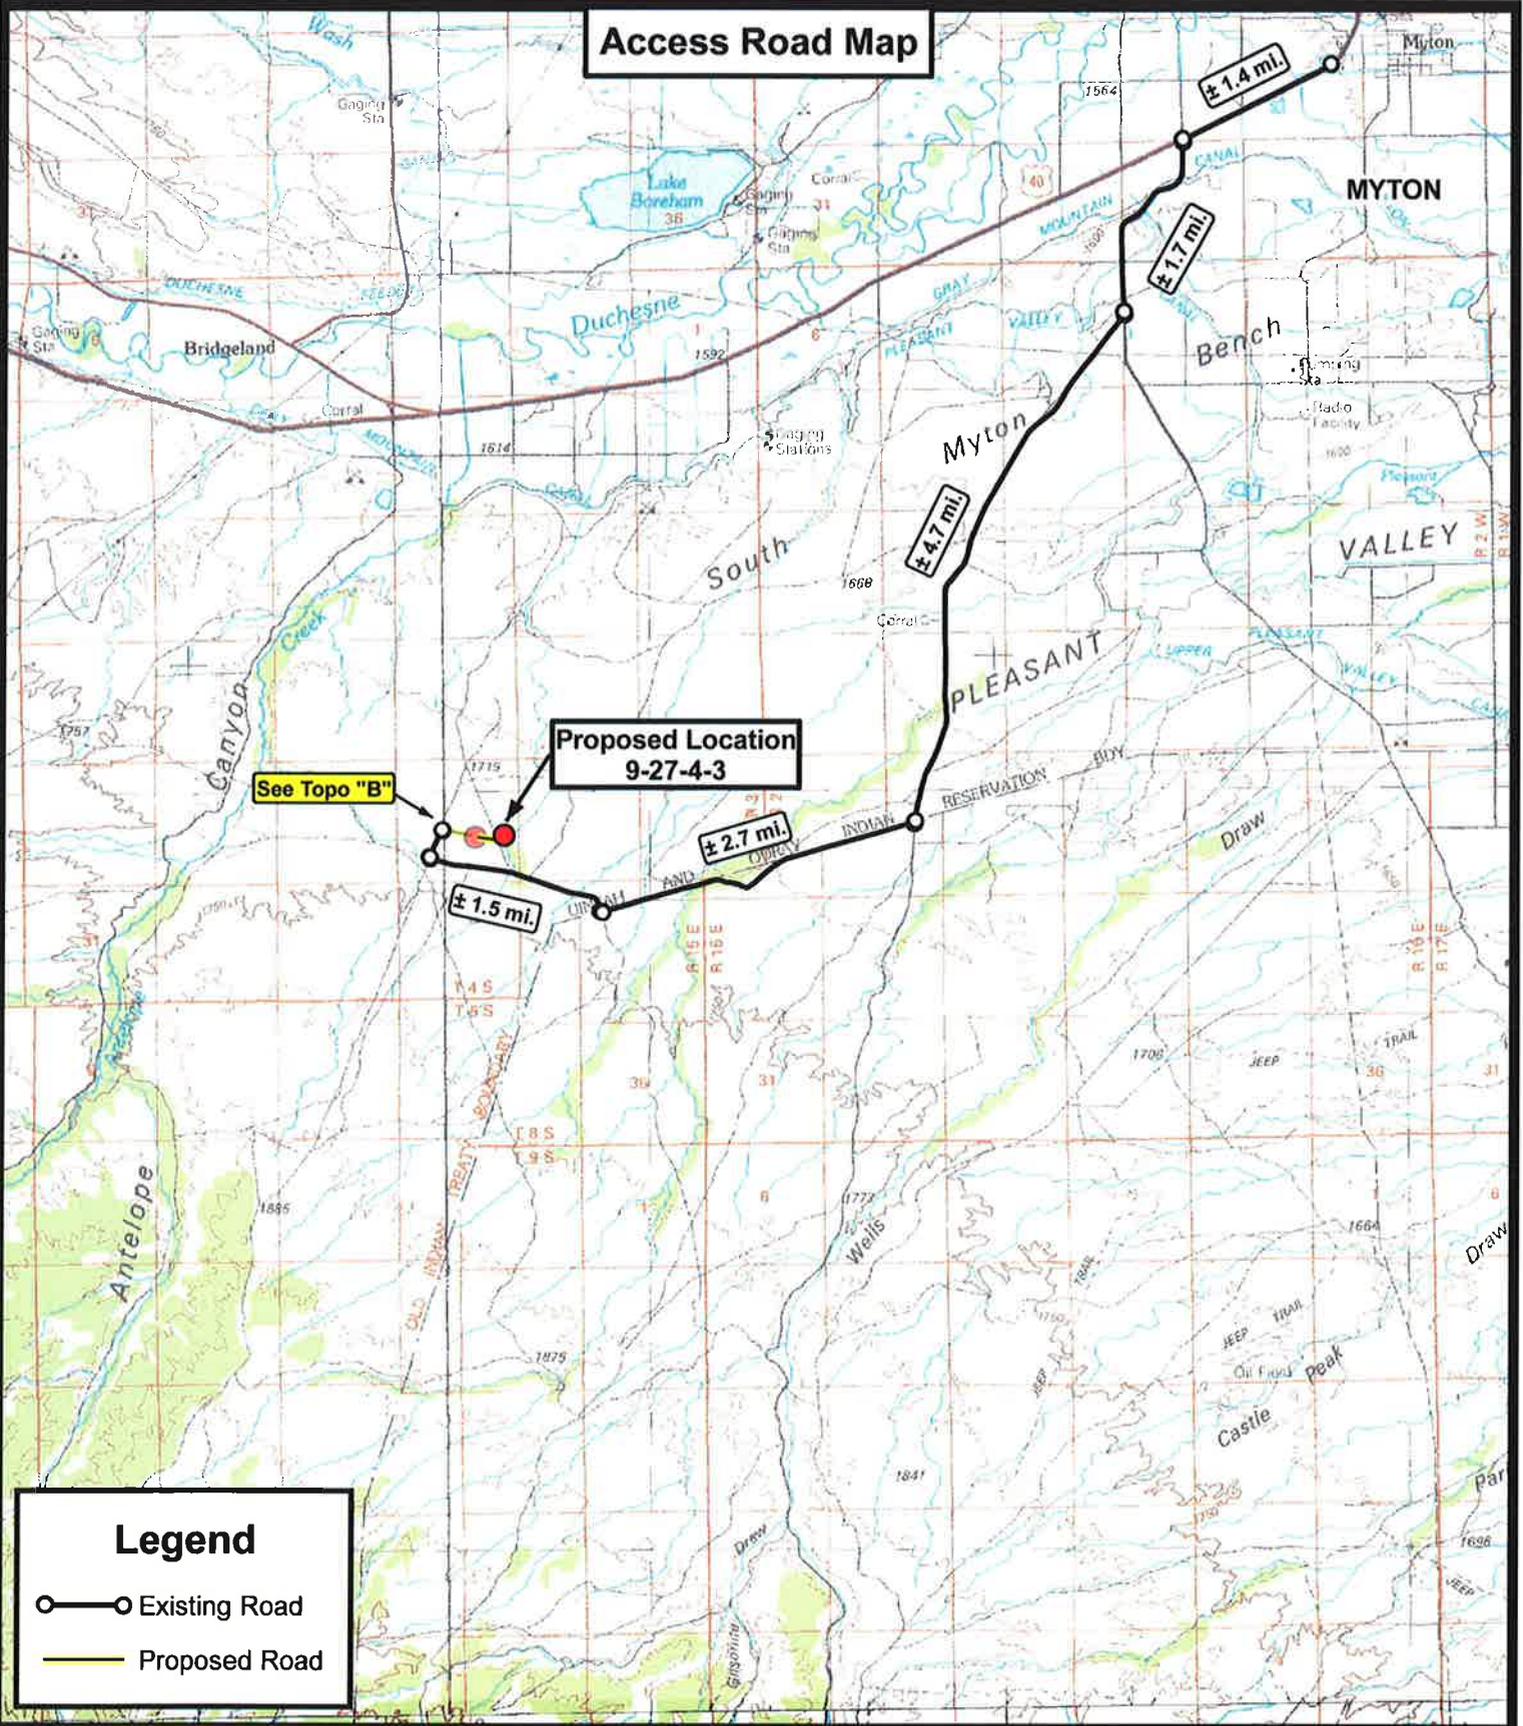

## Legend

- Existing Road
- Proposed Road



**Tri State  
Land Surveying, Inc.**

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
F: (435) 781-2518



**NEWFIELD EXPLORATION COMPANY**

**9-27-4-3  
SEC. 27, T4S, R3W, U.S.B.&M.  
Duchesne County, UT.**


DRAWN BY:	C.H.M.
DATE:	03-15-2010
SCALE:	1:100,000

**TOPOGRAPHIC MAP**

SHEET

**A**

# Access Road Map

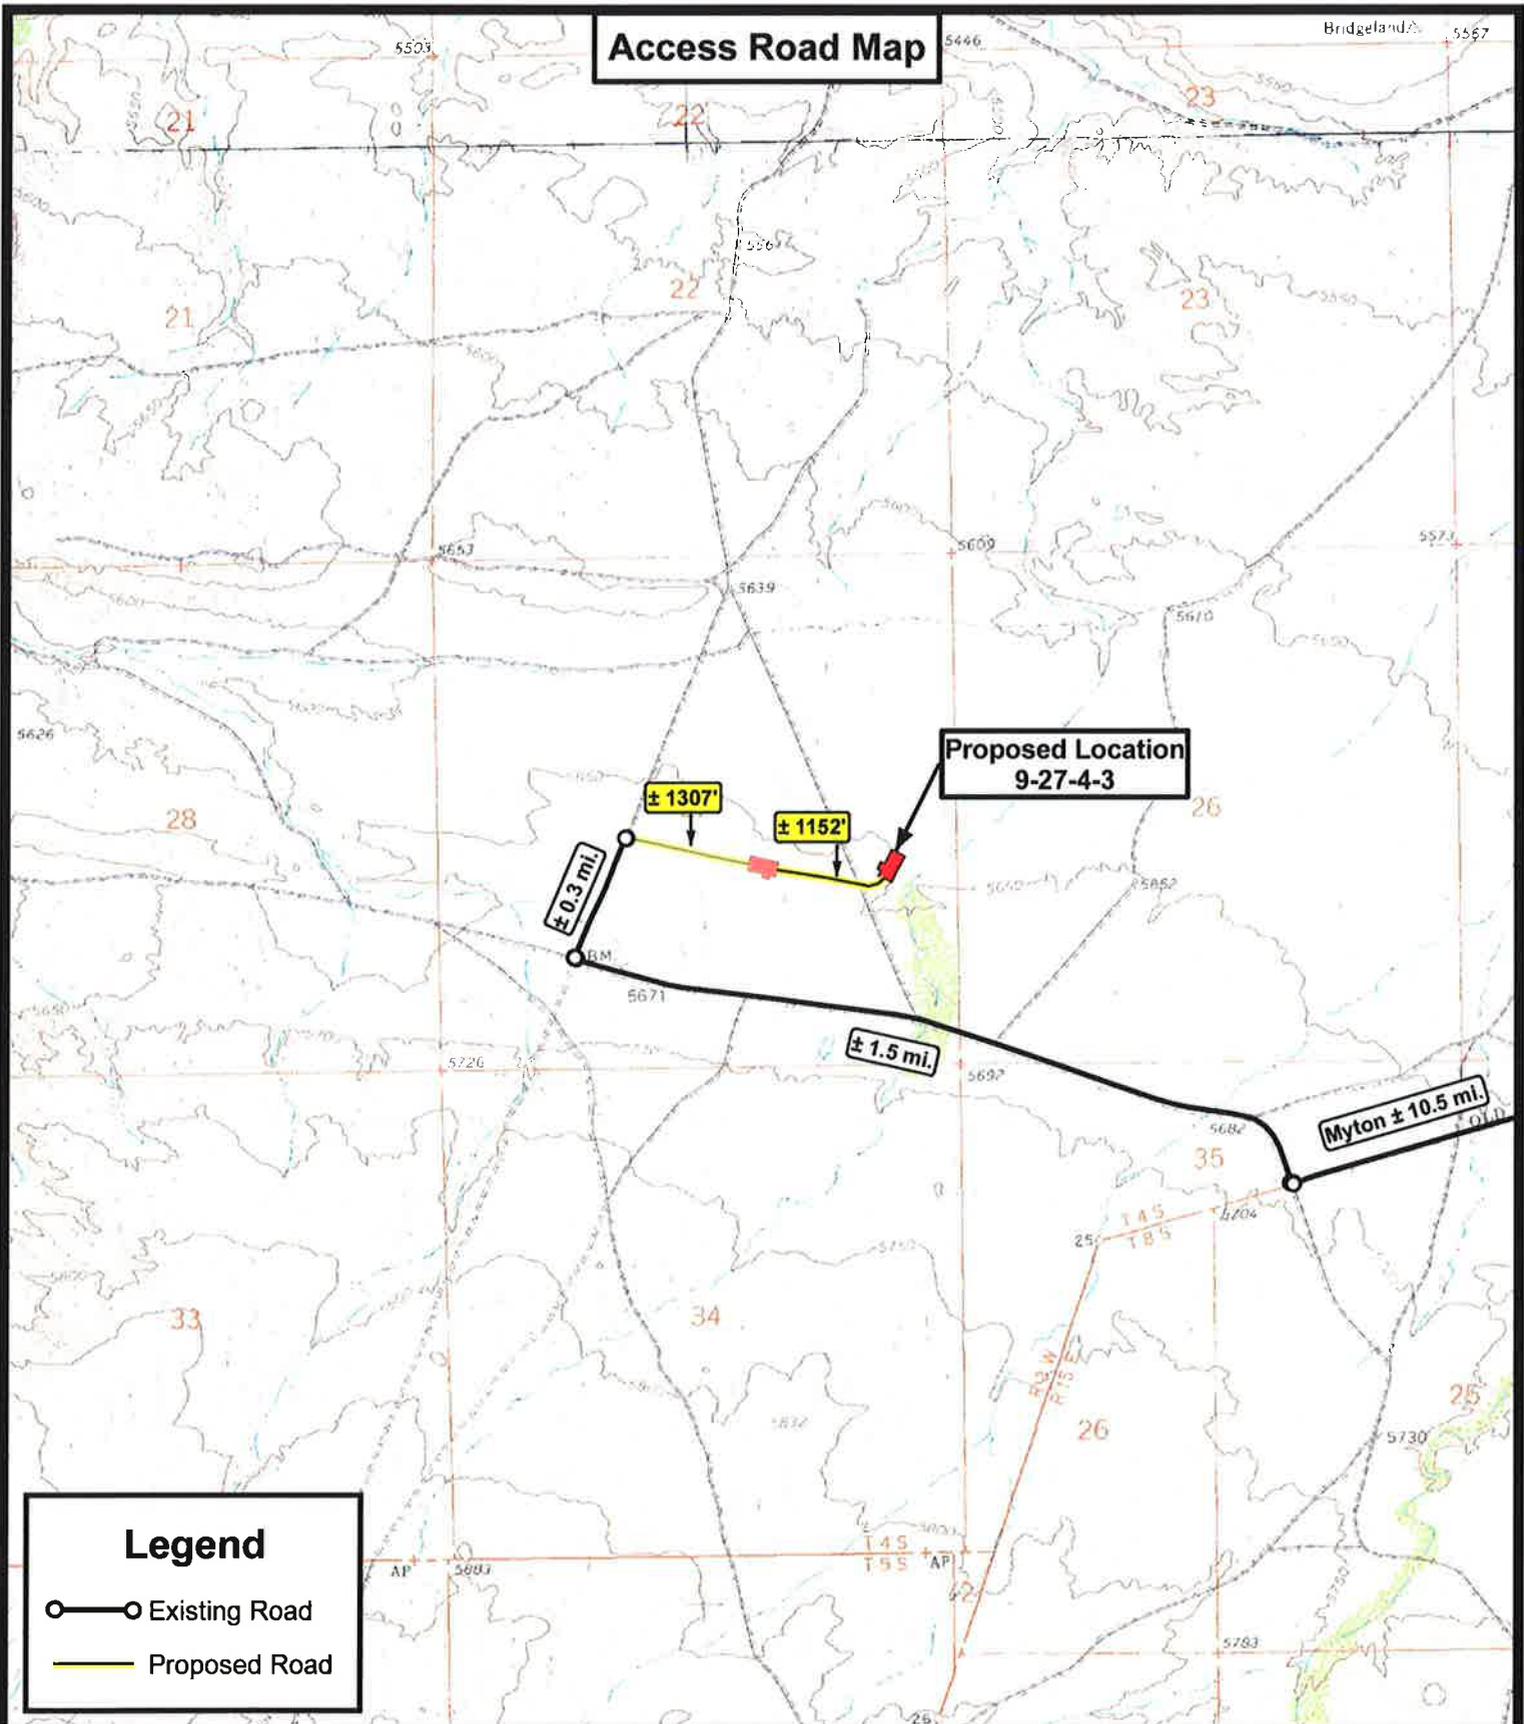

**Legend**

- Existing Road
- Proposed Road

**Tri State Land Surveying, Inc.**  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
 F: (435) 781-2518



## NEWFIELD EXPLORATION COMPANY


9-27-4-3  
 SEC. 27, T4S, R3W, U.S.B.&M.  
 Duchesne County, UT.

DRAWN BY:	C.H.M.
DATE:	03-15-2010
SCALE:	1" = 2,000'

TOPOGRAPHIC MAP

SHEET  
**B**

# Proposed Pipeline Map

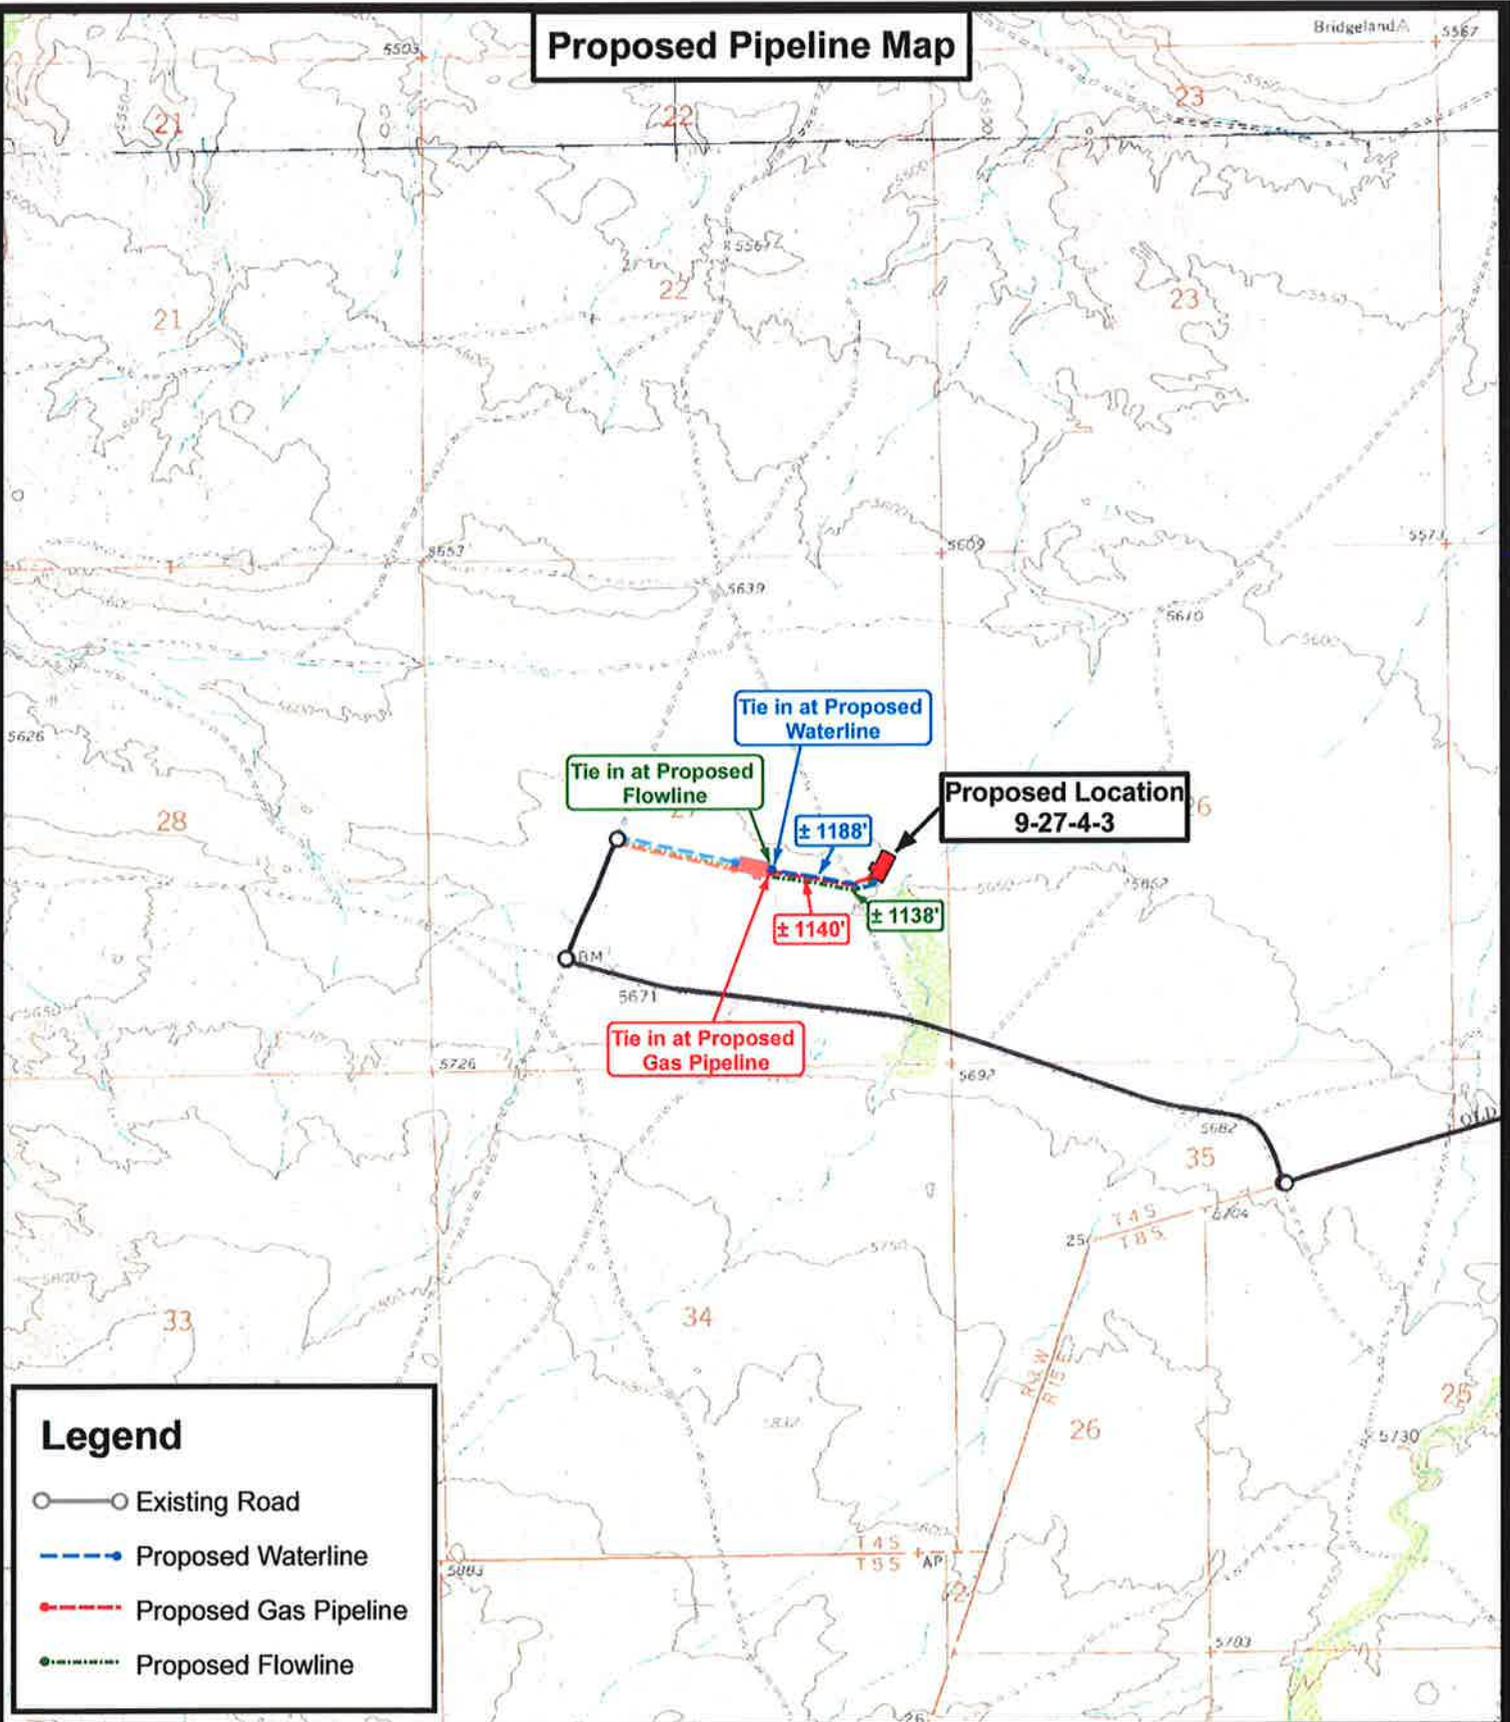

**Legend**

- Existing Road
- Proposed Waterline
- Proposed Gas Pipeline
- Proposed Flowline

**Tri State Land Surveying, Inc.**  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
 F: (435) 781-2518

DRAWN BY:	C.H.M.
DATE:	03-15-2010
SCALE:	1" = 2,000'




**NEWFIELD EXPLORATION COMPANY**


9-27-4-3  
 SEC. 27, T4S, R3W, U.S.B.&M.  
 Duchesne County, UT.

**TOPOGRAPHIC MAP**

SHEET **C**

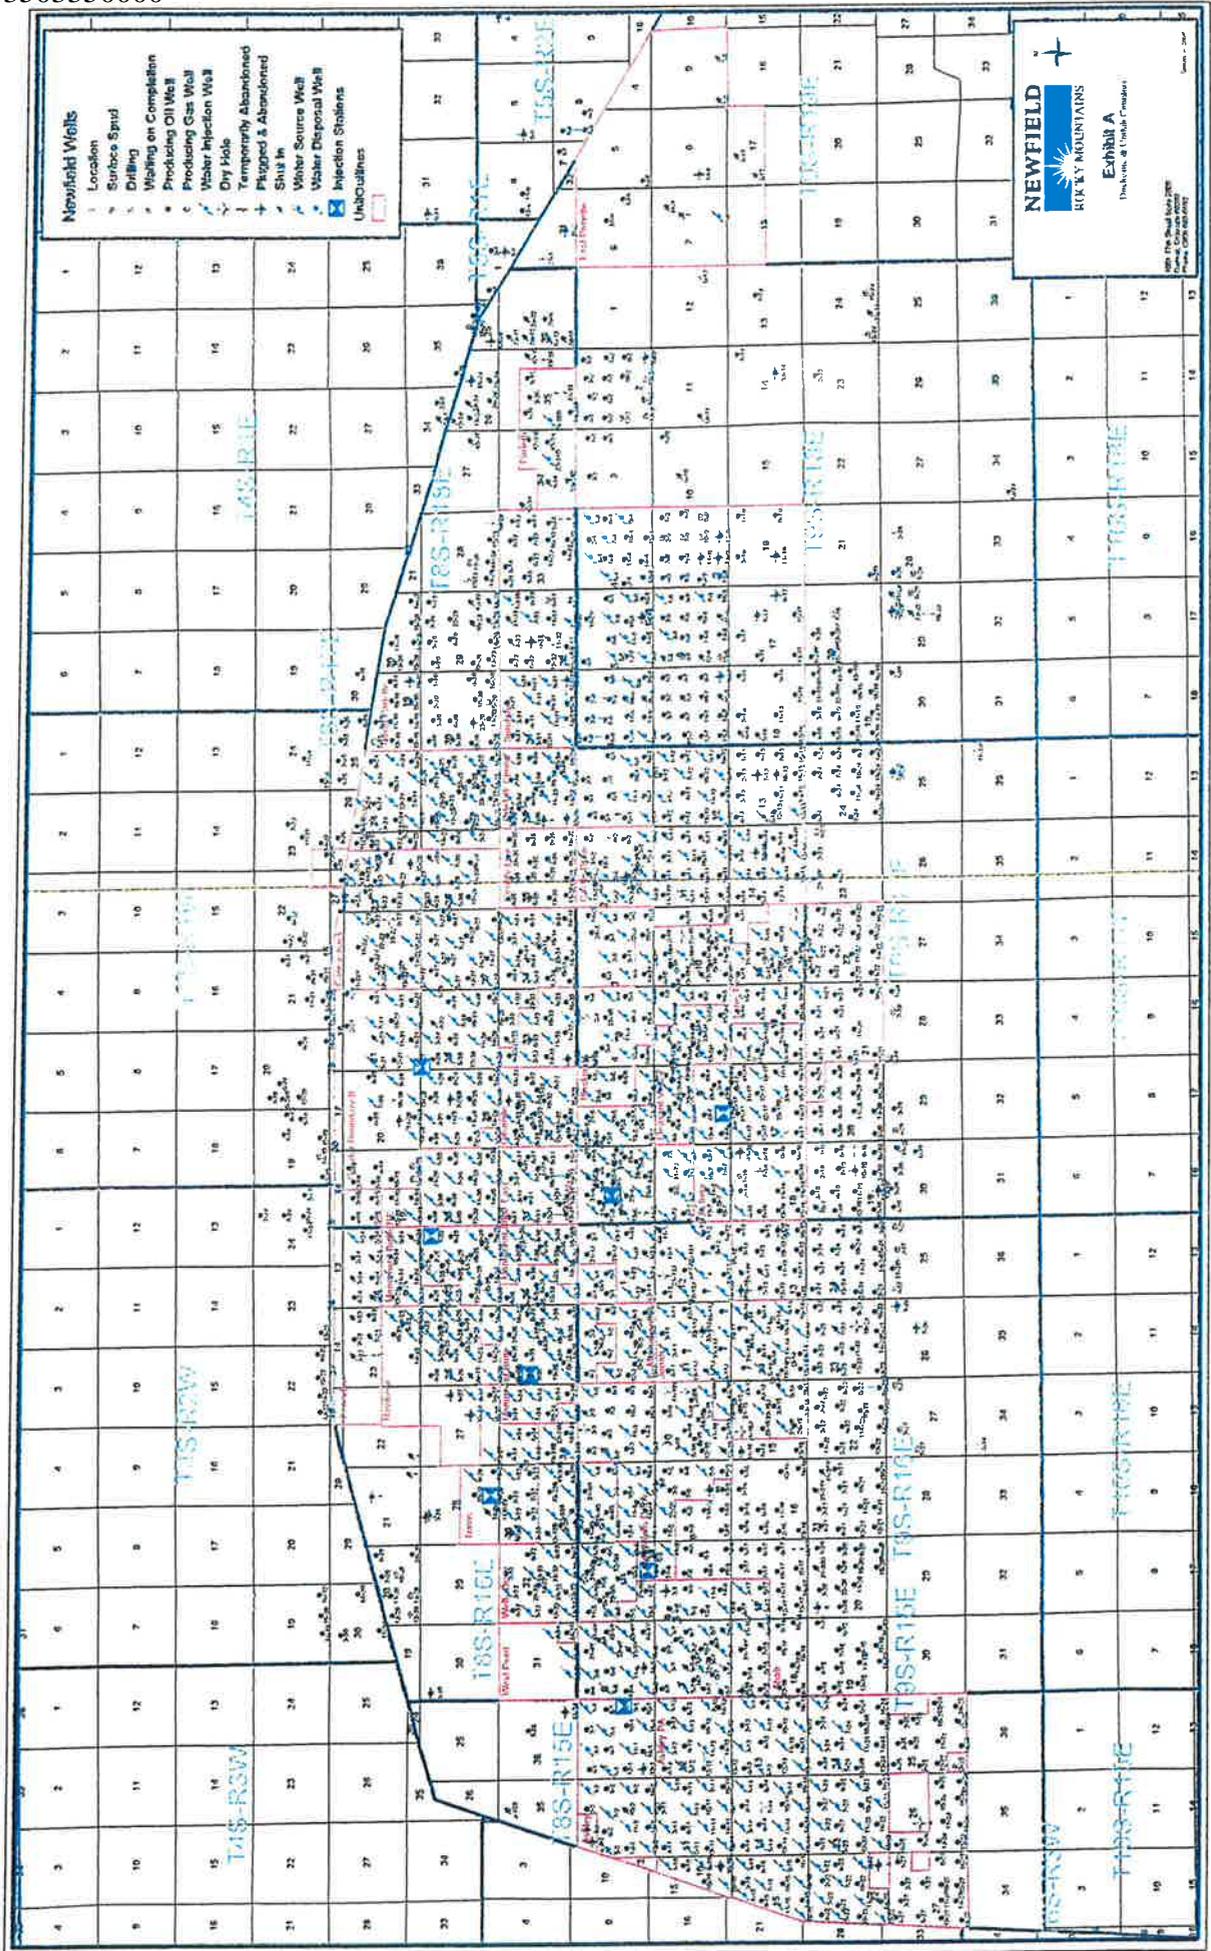

### Exhibit "B" Map

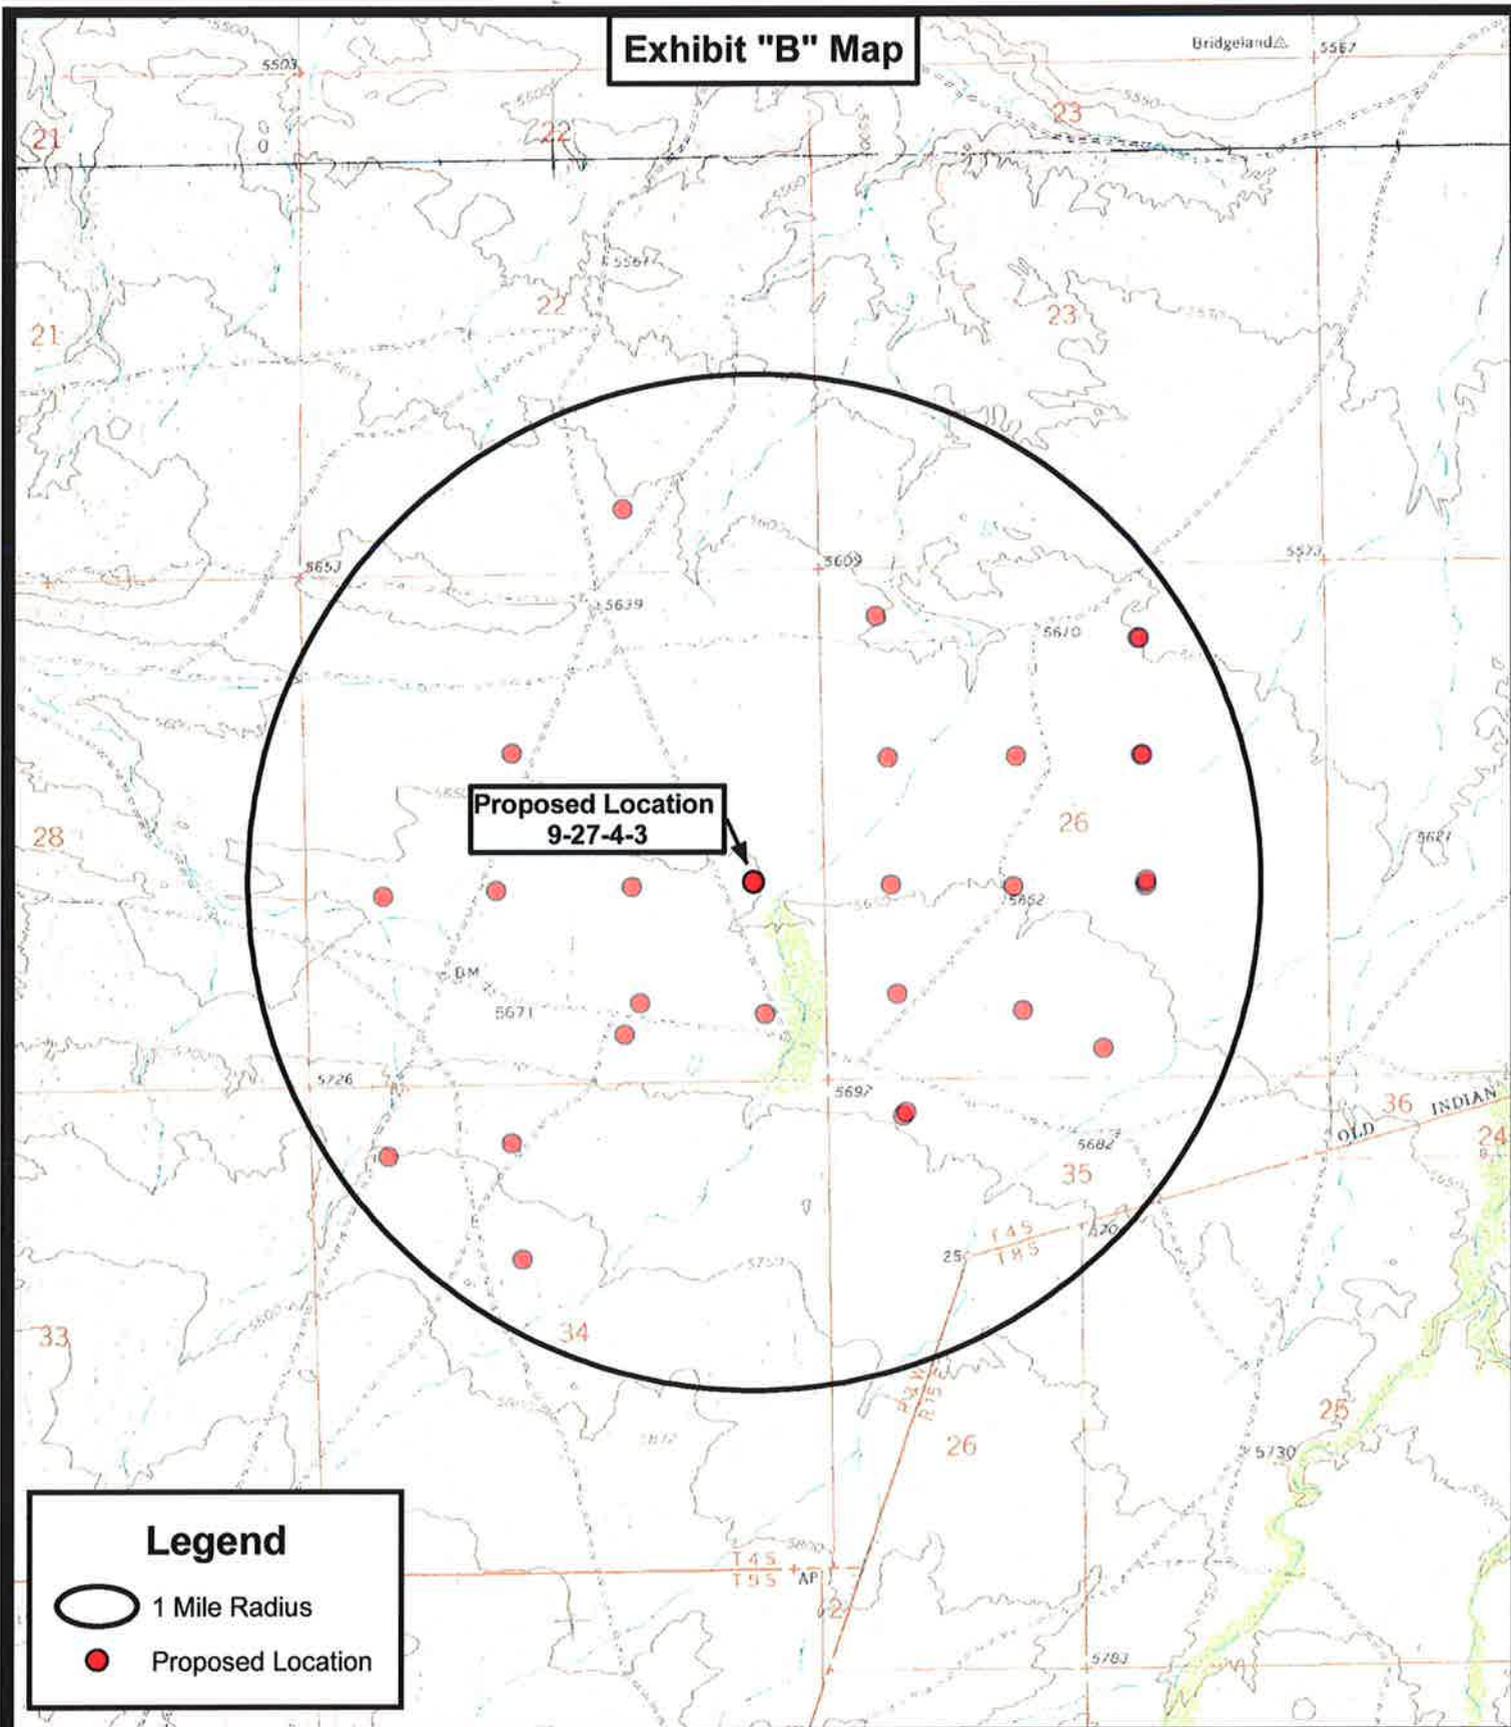

**Proposed Location  
9-27-4-3**

**Legend**

- 1 Mile Radius
- Proposed Location

**Tri State**  
Land Surveying, Inc.  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
F: (435) 781-2518



**NEWFIELD EXPLORATION COMPANY**  
**9-27-4-3**  
**SEC. 27, T4S, R3W, U.S.B.&M.**  
**Duchesne County, UT.**

DRAWN BY: C.H.M.  
DATE: 03-15-2010  
SCALE: 1" = 2,000'

**TOPOGRAPHIC MAP**

SHEET  
**D**

**NEWFIELD PRODUCTION COMPANY  
UTE TRIBAL 9-27-4-3  
NE/SE SECTION 27, T4S, R3W  
DUCHESNE COUNTY, UTAH**

**ONSHORE ORDER NO. 1**

**MULTI-POINT SURFACE USE & OPERATIONS PLAN**

**1. EXISTING ROADS**

See attached Topographic Map "A"

To reach Newfield Production Company well location site Ute Tribal 9-27-4-3 located in the NE 1/4 SE 1/4 Section 27, T4S, R3W, Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.4 miles  $\pm$  to the junction of this highway and UT State Hwy 53; proceed in a southwesterly direction approximately 6.4 miles to it's junction with an existing road to the southwest; proceed in a southwesterly direction approximately 2.7 miles to it's junction with an existing road to the northwest; proceed in a northwesterly direction approximately 1.5 miles to it's junction with an existing road to the northeast; proceed northeasterly approximately 0.3 miles to it's junction with the beginning of the proposed access road to the east; proceed easterly along the proposed access road approximately 2,459' to the proposed well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

**2. PLANNED ACCESS ROAD**

Approximately 2,459' of access road is proposed for the proposed well. See attached Topographic Map "B".

The proposed access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

**3. LOCATION OF EXISTING WELLS**

Refer to Exhibit "B".

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District  
Water Right : 43-7478

Neil Moon Pond  
Water Right: 43-11787

Newfield Collector Well  
Water Right: 41-3530 (A30414DV, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), State of Utah approved surface disposal facilities, or Federally approved surface disposal facilities.

8. **ANCILLARY FACILITIES**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT**

See attached Location Layout Sheet.

**Fencing Requirements**

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

- a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be

reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP** – Moon Live Stock LLC.

See attached Memorandum of Surface Use Agreement and Easement ROW.

12. **OTHER ADDITIONAL INFORMATION**

Newfield Production Company requests 2,459' of disturbed area be granted to allow for construction of the planned access road. **Refer to Topographic Map "B"**. A permanent width of 30' and a running surface of 18' is proposed for the planned access road. The construction phase of the planned access road will last approximately (5) days. The planned access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%. There will be no culverts required along this access road. There will be barrow ditches and turnouts as needed along this road. There are no fences encountered along this proposed road. There will be no new gates or cattle guards required. All construction material for this access road will be borrowed material accumulated during construction of the access road.

Newfield Production Company requests 1,140' of disturbed area be granted for construction of the proposed gas lines. It is proposed that the disturbed area will temporarily be 50' wide to allow for construction of a 6" gas gathering line, and a 3" poly fuel gas line, with a permanent width of 30' upon completion of the proposed gas lines. The construction phase of the proposed gas lines will last approximately (5) days. Both proposed lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."**

Newfield Production Company requests 1,188' of disturbed area be granted to allow for construction of the proposed water lines. It is proposed that the disturbed area will temporarily be 50' wide to allow for construction of a buried 3" steel water injection line and a buried 3" poly water return line and 30' wide upon completion of the proposed water lines. Both proposed lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."** In the event that the proposed well is converted to a water injection well, a separate injection permit will be applied for through the proper agencies.

**Surface Flow Line**

Newfield Production Company requests 1,138' of disturbed area be granted for construction of a surface flow line bundle. For all new wells, Newfield requests that a 30' Right of way be granted to allow for construction of up to a 14" bundled pipe consisting of 2-2" poly glycol lines and 1-3" production line. Refer to Topographic Map "C" for the proposed location of the proposed flow line. Flow lines will be tan and will be constructed using the following procedures:

Clearing and Grading: the proposed flow line will be placed on the surface of the ground. As such no grading or clearing will be needed. The flow line will be centered staked every 200 feet prior to the installation. The flow line will be as close to the access road as possible without interfering with the normal road travel, or road maintenance

Installation for portions along existing roads, lengths of pipe will be laid in the barrow ditch, welded together and moved into place. For lines that go cross-country minimal access will be needed only for maintenance purpose. It is in the best interest of Newfield Exploration to avoid wet and saturated ground that would cause ruts greater than 3 inches in depth. Disturbed areas will be reclaimed with in 120 days of the end of the installation.

- a) Newfield Production Company is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, Newfield is to immediately stop work that might further disturb such materials and contact the Authorized Officer.
- b) Newfield Production will control noxious weeds along rights-of-way for roads, pipelines, well sites or other applicable facilities. On State administered land it is required that a Pesticide Use Proposal shall be submitted and given approval prior to the application of herbicides or other possible hazardous chemicals.
- c) Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on State Lands after the conclusion of drilling operations or at any other time without State authorization. However, if State authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

The Archaeological and Paleontological Report Waiver is attached.

#### **Additional Surface Stipulations**

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

#### **Hazardous Material Declaration**

Newfield Production Company guarantees that during the drilling and completion of the Ute Tribal 9-27-4-3, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the Ute Tribal 9-27-4-3, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

The State office as well as the Ute Tribe Energy and Mineral Department shall be notified upon site completion prior to moving on the drilling rig.

#### **13. LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

##### Representative

Name: Tim Eaton  
Address: Newfield Production Company  
Route 3, Box 3630  
Myton, UT 84052  
Telephone: (435) 646-3721


Certification

Please be advised that Newfield Production Company is considered to be the operator of well #9-27-4-3, NE/SE Section 27, T4S, R3W, Duchesne County, Utah and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage for this well is covered by the Bureau of Indian Affairs Bond #RLB0010462.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

4/28/10

Date




Mandje Crozier  
Regulatory Specialist  
Newfield Production Company

# NEWFIELD EXPLORATION COMPANY

## LOCATION LAYOUT

9-27-4-3

Section 27, T4S, R3W, U.S.B.&M.

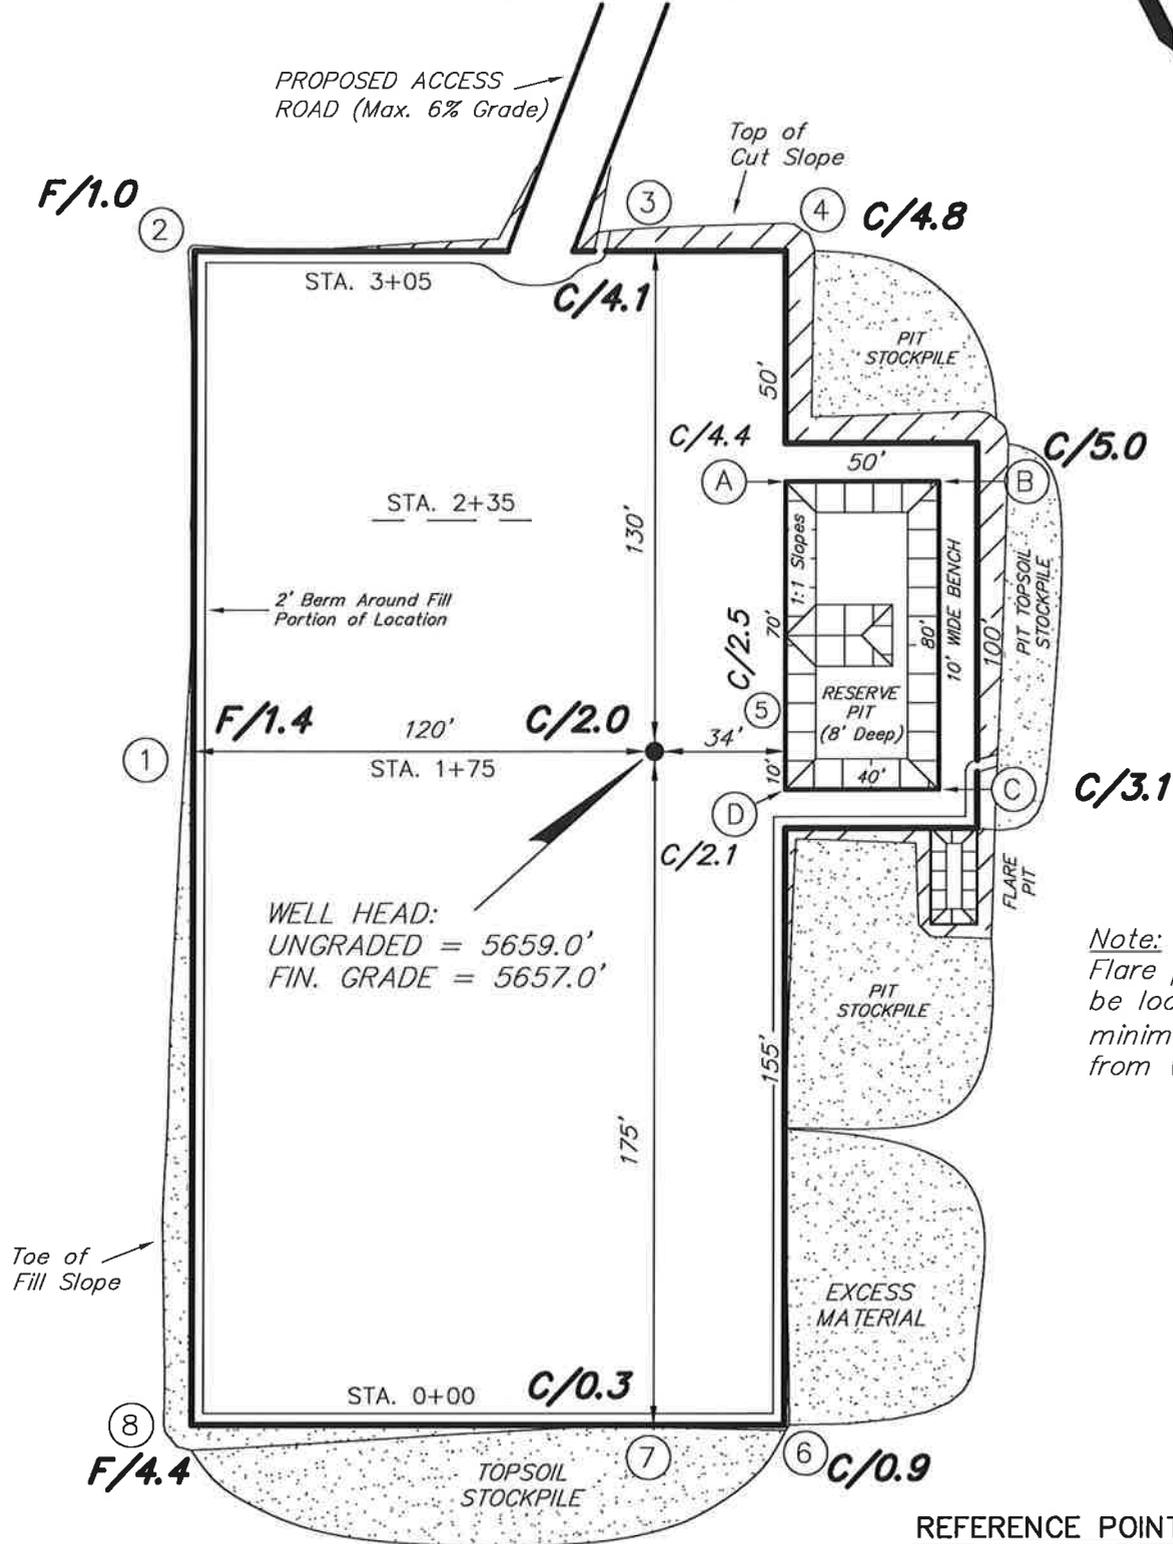

WELL HEAD:  
UNGRADED = 5659.0'  
FIN. GRADE = 5657.0'

*Note:*  
Flare pit is to be located a minimum of 80' from well head.

**REFERENCE POINTS**

170' SOUTHEAST	= 5653.8'
225' NORTHEAST	= 5657.5'
275' NORTHEAST	= 5656.7'

SURVEYED BY: S.V.	DATE SURVEYED: 03-13-10
DRAWN BY: F.T.M.	DATE DRAWN: 03-15-10
SCALE: 1" = 50'	REVISED:





**Tri State** (435) 781-2501  
**Land Surveying, Inc.**  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

# NEWFIELD EXPLORATION COMPANY

## CROSS SECTIONS

**9-27-4-3**

Section 27, T4S, R3W, U.S.B.&M.

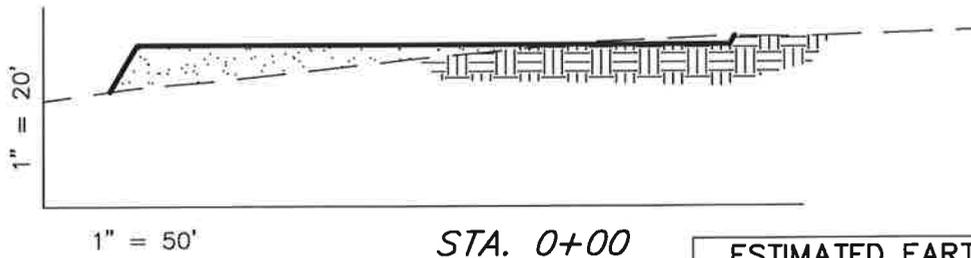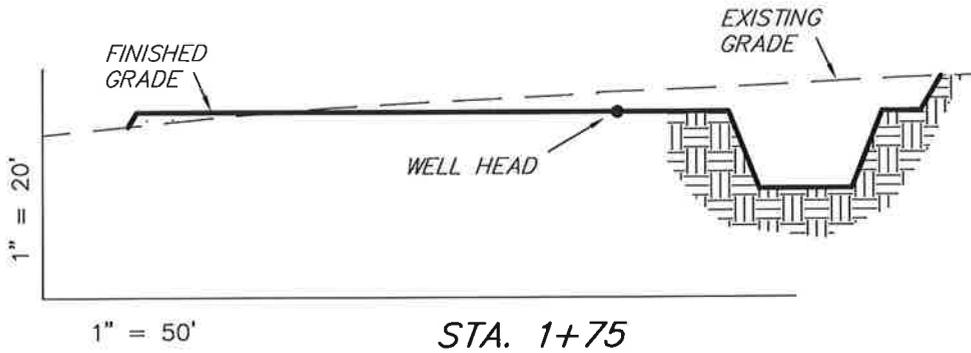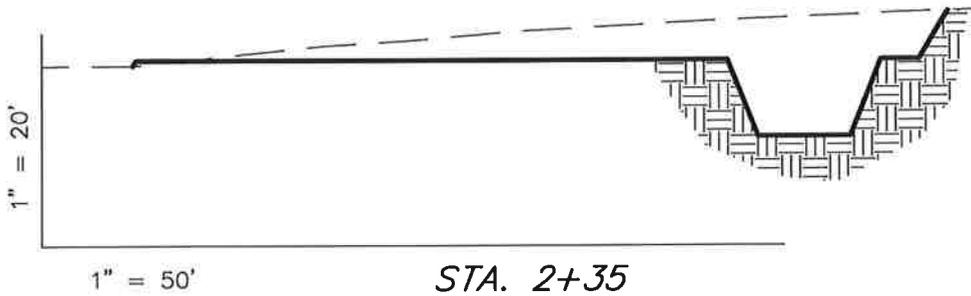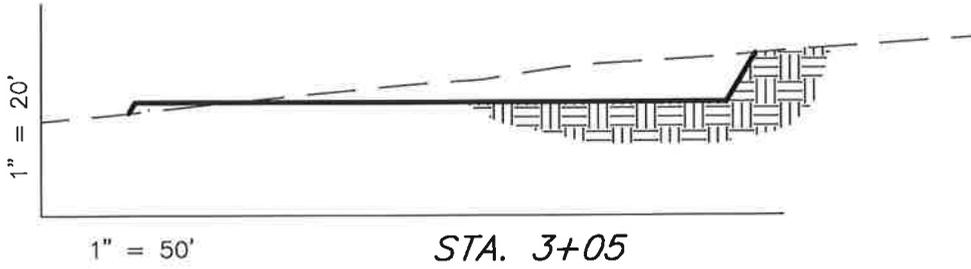

NOTE:  
UNLESS OTHERWISE  
NOTED ALL CUT/FILL  
SLOPES ARE AT 1.5:1

**ESTIMATED EARTHWORK QUANTITIES**  
(No Shrink or swell adjustments have been used)  
(Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	2,010	2,010	Topsoil is not included in Pad Cut	0
PIT	640	0		640
<b>TOTALS</b>	<b>2,650</b>	<b>2,010</b>	<b>1,040</b>	<b>640</b>

SURVEYED BY: S.V.	DATE SURVEYED: 03-13-10
DRAWN BY: F.T.M.	DATE DRAWN: 03-15-10
SCALE: 1" = 50'	REVISED:

(435) 781-2501  
**Tri State**  
*Land Surveying, Inc.*  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078


# NEWFIELD EXPLORATION COMPANY

## TYPICAL RIG LAYOUT

9-27-4-3

Section 27, T4S, R3W, U.S.B.&M.

PROPOSED ACCESS ROAD (Max. 6% Grade)

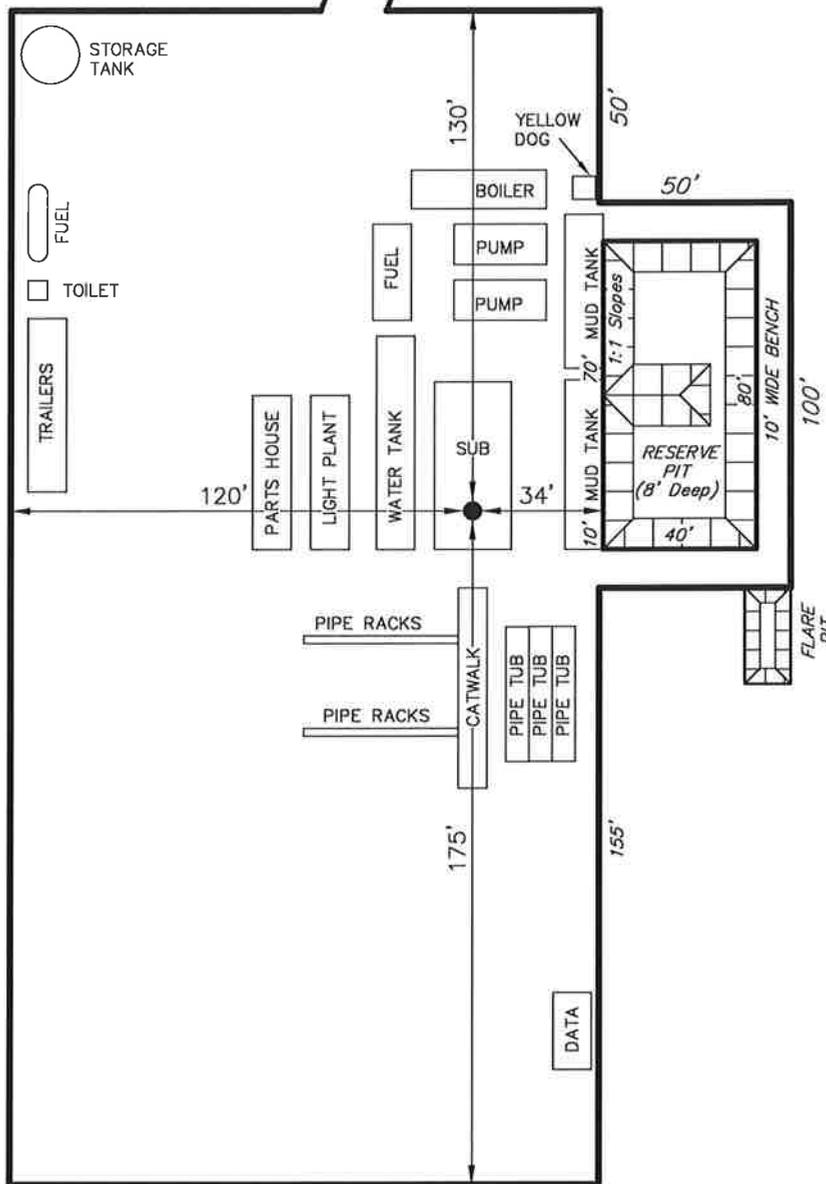

SURVEYED BY: S.V.	DATE SURVEYED: 03-13-10
DRAWN BY: F.T.M.	DATE DRAWN: 03-15-10
SCALE: 1" = 50'	REVISED:

**Tri State** (435) 781-2501  
 Land Surveying, Inc.  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078


# Newfield Production Company Proposed Site Facility Diagram

Ute Tribal 9-27-4-3

NE/SE Sec. 27, T4S, R3W

Duchesne County, Utah

14-20-H62-6154

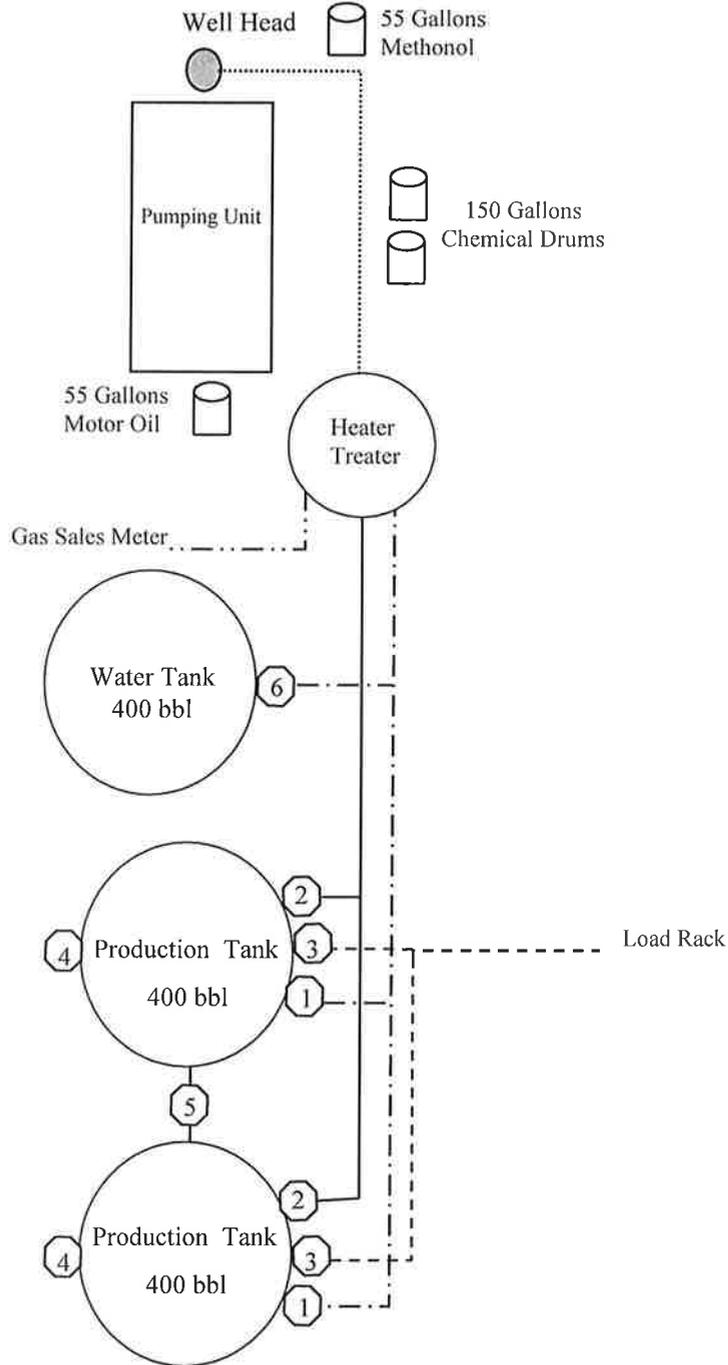

### Legend

Emulsion Line	.....
Load Rack	-----
Water Line	-.-.-.-
Gas Sales	.....
Oil Line	————

### Production Phase:

- 1) Valves 1, 3, and 4 sealed closed
- 2) Valves 2, 5, and 6 sealed open

### Sales Phase:

- 1) Valves 1, 2, 4, 5, and 6 sealed closed
- 2) Valve 3 open

### Draining Phase:

- 1) Valves 1 and 6 open

Diked Section







**API Number: 4301350335**  
**Well Name: Ute Tribal 9-27-4-3**  
**Township 04.0 S Range 03.0 W Section 27**  
**Meridian: UBM**  
 Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared:  
 Map Produced by Diana Mason

<b>Units STATUS</b>	<b>Wells Query</b>
ACTIVE	<-all other values>
EXPLORATORY	<b>Status</b>
GAS STORAGE	APD - Approved Permit
NF PP OIL	DRL - Spudded (Drilling Commenced)
NF SECONDARY	GIW - Gas Injection
PI OIL	GS - Gas Storage
PP GAS	LA - Location Abandoned
PP GEOTHERM	LOC - New Location
PP OIL	OPS - Operation Suspended
SECONDARY	PA - Plugged Abandoned
TERMINATED	PBW - Producing Gas Well
<b>Fields</b>	POW - Producing Oil Well
Sections	RET - Returned APD
Township	SGW - Shut-in Gas Well
	SOW - Shut-in Oil Well
	TA - Temp. Abandoned
	TW - Test Well
	WDW - Water Disposal
	WIW - Water Injection Well
	WSW - Water Supply Well

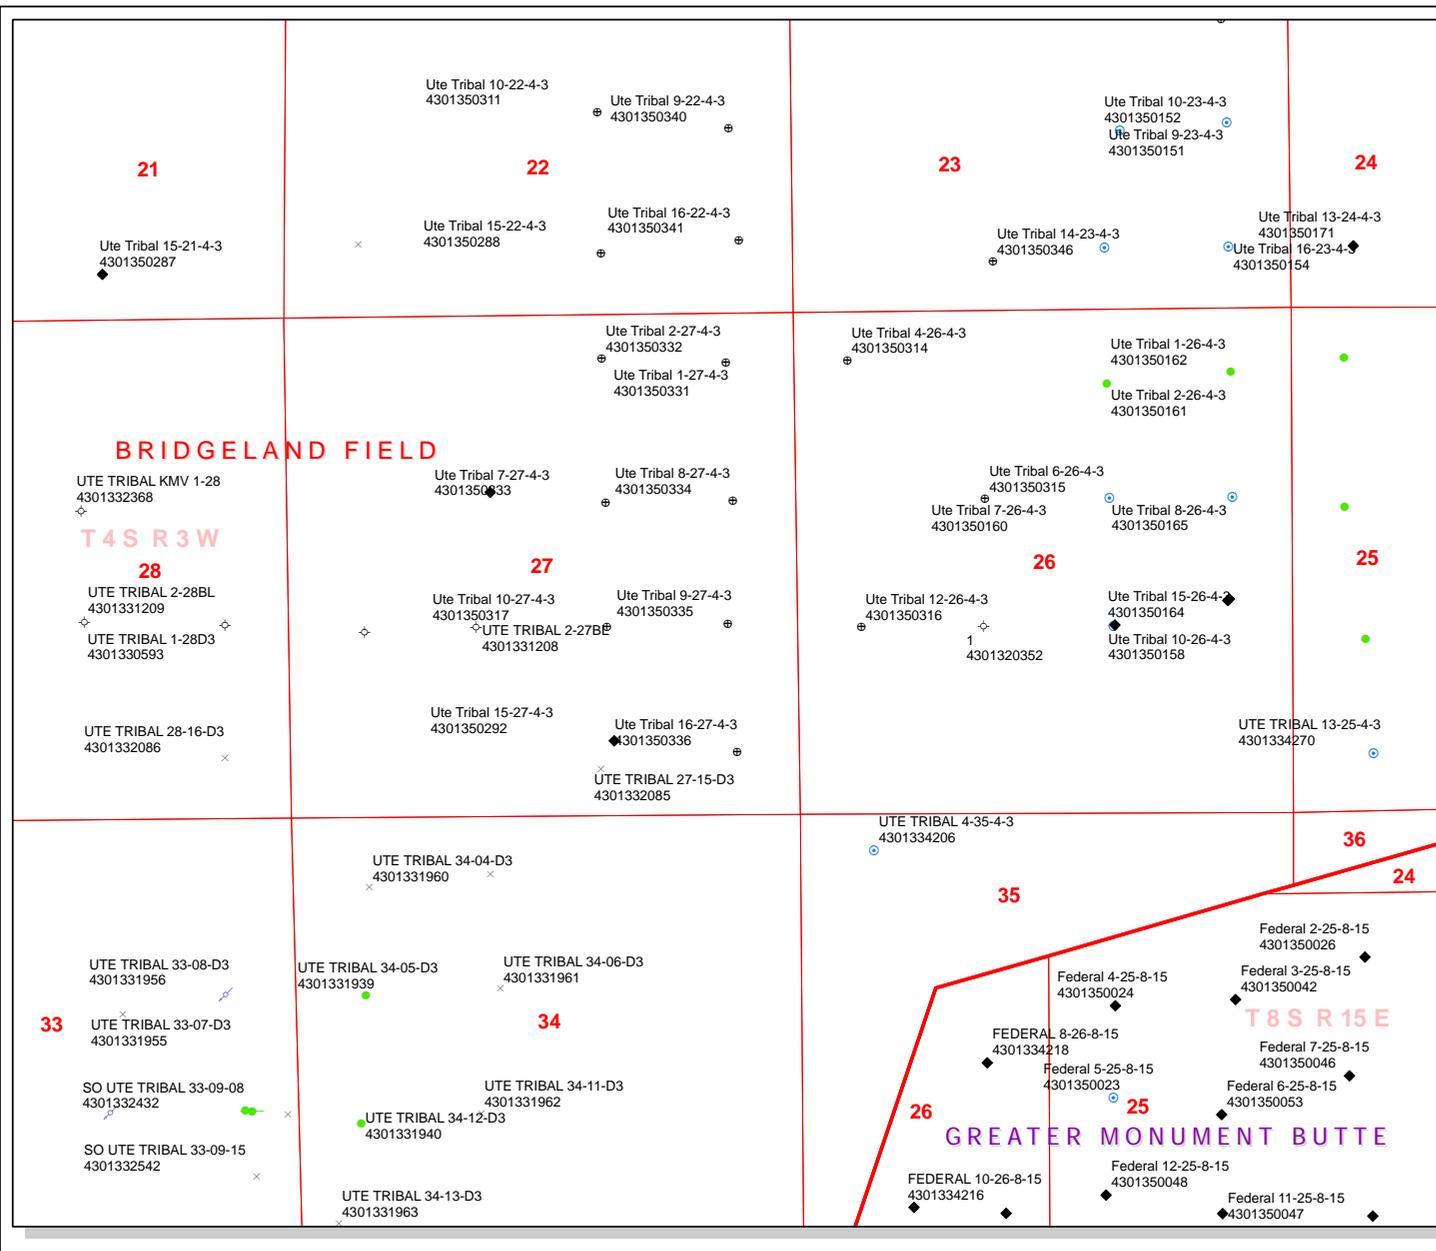

# ON-SITE PREDRILL EVALUATION

## Utah Division of Oil, Gas and Mining

**Operator** NEWFIELD PRODUCTION COMPANY  
**Well Name** Ute Tribal 9-27-4-3  
**API Number** 43013503350000      **APD No** 2628      **Field/Unit** UNDESIGNATED  
**Location: 1/4,1/4** NESE      **Sec** 27      **Tw** 4.0S      **Rng** 3.0W      2030      FSL 746      FEL  
**GPS Coord (UTM)** 568089 4439429      **Surface Owner** Moon Live Stock LLC

**Participants**

Floyd Bartlett (DOGM), Joe Pippy (Newfield Permitting), Scott Vernon (Tri-State Land Surveying), Christine Cimiluca and Cheryl Laroque (BLM).

**Regional/Local Setting & Topography**

The proposed location is approximately 12.3 road miles southwest of Myton, UT in the South Myton Bench/Antelope Creek area. Drainages in the area run northerly toward the Duchesne River about 4 miles away but are intercepted by the Pleasant Valley Irrigation Canal. Broad flats and rolling hills with those near the edge of the bench becoming steep and intersected with draws, characterize the area. Access is by State, County and planned or existing oil field development roads. Approximately 1,152 feet of new construction across Moon’s private land will be required to reach the location.

The proposed Ute Tribal 9-27-4-3 oil well pad laid out in a south to north direction in a flat area with a slight slope to the south toward a wide greasewood dominated swale. Maximum cut is 5.0 feet at the pit area. Goats were grazing in the swale. No springs, streams or seeps are known to exist in the immediate area. The selected site appears to be a good location for constructing a pad, drilling and operating a well.

Moon Livestock own the surface of the location. Mr. Ken Moon is the contact person. . The BLM contacted Mr. Moon by telephone and invited him to the pre-site visit. He said he would not attend. A signed landowner agreement exists. The minerals are owned by the United States Government and held in trust for the Ute Indian Tribe.

**Surface Use Plan**

**Current Surface Use**

Grazing  
 Wildlife Habitat

<b>New Road Miles</b>	<b>Well Pad</b>	<b>Src Const Material</b>	<b>Surface Formation</b>
0.2	<b>Width</b> 204 <b>Length</b> 305	Onsite	UNTA

**Ancillary Facilities** N

**Waste Management Plan Adequate?**

**Environmental Parameters**

**Affected Floodplains and/or Wetlands** N

**Flora / Fauna**

A desert shrub type vegetation covers the area. Principal plants consist of horsebrush, fringe sage, cheatgrass, halogeton, globe mallows, shadscale, curly mesquite, prickly pear and spring annuals.

Cattle, deer, prairie dogs, small mammals and birds.

**Soil Type and Characteristics**

Deep sandy loam.

**Erosion Issues** N

**Sedimentation Issues** N

**Site Stability Issues** N

**Drainage Diverson Required?** N

**Berm Required?** Y

**Erosion Sedimentation Control Required?** N

**Paleo Survey Run?** N **Paleo Potential Observed?** N **Cultural Survey Run?** N **Cultural Resources?**

**Reserve Pit**

**Site-Specific Factors**

**Site Ranking**

<b>Distance to Groundwater (feet)</b>	100 to 200	5	
<b>Distance to Surface Water (feet)</b>	>1000	0	
<b>Dist. Nearest Municipal Well (ft)</b>	>5280	0	
<b>Distance to Other Wells (feet)</b>	300 to 1320	10	
<b>Native Soil Type</b>	Mod permeability	10	
<b>Fluid Type</b>	Fresh Water	5	
<b>Drill Cuttings</b>	Normal Rock	0	
<b>Annual Precipitation (inches)</b>		0	
<b>Affected Populations</b>			
<b>Presence Nearby Utility Conduits</b>	Not Present	0	
	<b>Final Score</b>	30	1 Sensitivity Level

**Characteristics / Requirements**

A reserve pit 40' x 80' x 8' deep will be located in an area of cut on the southwest side of the location. A pit liner is required. Newfield commonly uses a 16-mil liner.

**Closed Loop Mud Required?** N **Liner Required?** Y **Liner Thickness** 16 **Pit Underlayment Required?** Y

**Other Observations / Comments**

ATV's were used to reach the site.

Floyd Bartlett  
**Evaluator**

5/12/2010  
**Date / Time**

# Application for Permit to Drill

## Statement of Basis

5/26/2010

### Utah Division of Oil, Gas and Mining

Page 1

<b>APD No</b>	<b>API WellNo</b>	<b>Status</b>	<b>Well Type</b>	<b>Surf Owner</b>	<b>CBM</b>
2628	43013503350000	LOCKED	OW	P	No
<b>Operator</b>	NEWFIELD PRODUCTION COMPANY		<b>Surface Owner-APD</b>	Moon Live Stock LLC	
<b>Well Name</b>	Ute Tribal 9-27-4-3		<b>Unit</b>		
<b>Field</b>	UNDESIGNATED		<b>Type of Work</b>	DRILL	
<b>Location</b>	NESE 27 4S 3W U 2030 FSL 746 FEL GPS Coord (UTM) 568079E 4439417N				

#### Geologic Statement of Basis

The mineral rights for the proposed well are owned by the Ute Tribe. The BLM will be the agency responsible for evaluating and approving the drilling, casing and cement programs.

Brad Hill  
APD Evaluator

5/24/2010  
Date / Time

#### Surface Statement of Basis

The proposed location is approximately 12.3 road miles southwest of Myton, UT in the South Myton Bench/Antelope Creek area. Drainages in the area run northerly toward the Duchesne River about 4 miles away but are intercepted by the Pleasant Valley Irrigation Canal. Broad flats and rolling hills with those near the edge of the bench becoming steep and intersected with draws, characterize the area. Access is by State, County and planned or existing oil field development roads. Approximately 1,152 feet of new construction across Moon's private land will be required to reach the location.

The proposed Ute Tribal 9-27-4-3 oil well pad laid out in a south to north direction in a flat area with a slight slope to the south toward a wide greasewood dominated swale. Maximum cut is 5.0 feet at the pit area. Goats were grazing in the swale. No springs, streams or seeps are known to exist in the immediate area. The selected site appears to be a good location for constructing a pad, drilling and operating a well.

Moon Livestock own the surface of the location. Mr. Ken Moon is the contact person. . The BLM contacted Mr. Moon by telephone and invited him to the pre-site visit. He said he would not attend. A signed landowner agreement exists. The minerals are owned by the United States Government and held in trust for the Ute Indian Tribe. Acting for the Ute Indian Tribe, Ms. Christine Cimiluca and Ms. Cheryl Laroque of the BLM attended the pre-site evaluation. They specified the color of paint the facilities were to be painted and had no surface concerns. Reclamation of the site will be as directed in the Multi-point Operating Plan.

Floyd Bartlett  
Onsite Evaluator

5/12/2010  
Date / Time

#### Conditions of Approval / Application for Permit to Drill

<b>Category</b>	<b>Condition</b>
Pits	A synthetic liner with a minimum thickness of 16 mils with a felt subliner shall be properly installed and maintained in the reserve pit.
Surface	The well site shall be bermed to prevent fluids from leaving the pad.
Surface	The reserve pit shall be fenced upon completion of drilling operations.

# WORKSHEET APPLICATION FOR PERMIT TO DRILL

**APD RECEIVED:** 4/29/2010

**API NO. ASSIGNED:** 43013503350000

**WELL NAME:** Ute Tribal 9-27-4-3

**OPERATOR:** NEWFIELD PRODUCTION COMPANY (N2695)

**PHONE NUMBER:** 435 646-4825

**CONTACT:** Mandie Crozier

**PROPOSED LOCATION:** NESE 27 040S 030W

**Permit Tech Review:**

**SURFACE:** 2030 FSL 0746 FEL

**Engineering Review:**

**BOTTOM:** 2030 FSL 0746 FEL

**Geology Review:**

**COUNTY:** DUCHESNE

**LATITUDE:** 40.10419

**LONGITUDE:** -110.20125

**UTM SURF EASTINGS:** 568079.00

**NORTHINGS:** 4439417.00

**FIELD NAME:** UNDESIGNATED

**LEASE TYPE:** 2 - Indian

**LEASE NUMBER:** 14-20-H62-6154

**PROPOSED PRODUCING FORMATION(S):** GREEN RIVER

**SURFACE OWNER:** 4 - Fee

**COALBED METHANE:** NO

**RECEIVED AND/OR REVIEWED:**

- PLAT
- Bond: INDIAN - RLB0010462
- Potash
- Oil Shale 190-5
- Oil Shale 190-3
- Oil Shale 190-13
- Water Permit: 43-7478
- RDCC Review:
- Fee Surface Agreement
- Intent to Commingle


**Commingle Approved**

**LOCATION AND SITING:**

- R649-2-3.
- Unit:**
- R649-3-2. General
- R649-3-3. Exception
- Drilling Unit
- Board Cause No:** R649-3-2
- Effective Date:**
- Siting:**
- R649-3-11. Directional Drill

**Comments:** Presite Completed

**Stipulations:** 4 - Federal Approval - dmason  
5 - Statement of Basis - bhill  
23 - Spacing - dmason



# State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
*Executive Director*

Division of Oil, Gas and Mining

JOHN R. BAZA  
*Division Director*

## Permit To Drill

\*\*\*\*\*

**Well Name:** Ute Tribal 9-27-4-3  
**API Well Number:** 43013503350000  
**Lease Number:** 14-20-H62-6154  
**Surface Owner:** FEE (PRIVATE)  
**Approval Date:** 6/1/2010

### Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

### Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of R649-3-2. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

### Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

### General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

### Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis (copy attached).

### Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during

drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels at 801-538-5284 (please leave a voicemail message if not available)
- OR
- submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <https://oilgas.ogm.utah.gov>

**Reporting Requirements:**

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

**Approved By:**



Acting Associate Director, Oil & Gas

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires July 31, 2010

**APPLICATION FOR PERMIT TO DRILL OR REENTER**

5. Lease Serial No. 14-20-H62-6154	
6. If Indian, Allottee or Tribe Name UTE	
7. If Unit or CA Agreement, Name and No. NA	
8. Lease Name and Well No. Ute Tribal 9-27-4-3	
9. API Well No. <b>43-013-50335</b>	
10. Field and Pool, or Exploratory Undesignated	11. Sec., T. R. M. or Blk. and Survey or Area Sec. 27, T4S R3W
12. County or Parish Duchesne	13. State UT
14. Distance in miles and direction from nearest town or post office* Approximately 12.8 miles southwest of Myton, UT	15. Distance from proposed* location to nearest property or lease line, ft. Approx. 746' f/lse, NA' f/unit (Also to nearest drig. unit line, if any)
16. No. of acres in lease NA	17. Spacing Unit dedicated to this well 40 Acres
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1344'	19. Proposed Depth 6,760'
20. BLM/BIA Bond No. on file RLB0010462	21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5659' GL
22. Approximate date work will start* <b>2nd Qtr. 2010</b>	23. Estimated duration (7) days from SPUD to rig release

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- |  |   |
|--|---|
| 1. Well plat certified by a registered surveyor.   | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan.  | 5. Operator certification   |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM.             |

25. Signature 	Name (Printed/Typed) Mandie Crozier	Date 4/28/10
Title Regulatory Specialist		

Approved by (Signature) 	Name (Printed/Typed) <b>James H. Sparger</b>	Date <b>SEP 09 2010</b>
Title Acting Assistant Field Manager Lands & Mineral Resources	Office <b>VERNAL FIELD OFFICE</b>	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

\*(Instructions on page 2)

**UDOGM**

**RECEIVED**

MAY 03 2010

NOS 04/23/2010

RECEIVED # 10550253A

BLM VERNAL, UTAH

OCT 14 2010

NOTICE OF APPROVAL

DIV. OF OIL, GAS & MINING CONDITIONS OF APPROVAL ATTACHED



**UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
VERNAL FIELD OFFICE**

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



**CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL**

<b>Company:</b>	<b>Newfield Production Company</b>	<b>Location:</b>	<b>NESE, Sec.27, T4S R3W</b>
<b>Well No:</b>	<b>Ute Tribal 9-27-4-3</b>	<b>Lease No:</b>	<b>14-20-H62-6154</b>
<b>API No:</b>	<b>43-013-50335</b>	<b>Agreement:</b>	<b>N/A</b>

**OFFICE NUMBER: (435) 781-4400**

**OFFICE FAX NUMBER: (435) 781-3420**

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR  
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

**NOTIFICATION REQUIREMENTS**

Construction Activity (Notify Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist)	-	The Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist shall be notified at least 48 hours in advance of any construction activity. The Ute Tribal office is open Monday through Thursday.
Construction Completion (Notify Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist)	-	Upon completion of the pertinent APD/ROW construction, notify the Ute Tribe Energy & Minerals Dept. for a Tribal Technician to verify the Affidavit of Completion. Notify the BLM Environmental Scientist prior to moving on the drilling rig.
Spud Notice (Notify BLM Petroleum Engineer)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify BLM Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings to: <a href="mailto:ut_vn_opreport@blm.gov">ut_vn_opreport@blm.gov</a> .
BOP & Related Equipment Tests (Notify BLM Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify BLM Petroleum Engineer)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM  
CONDITIONS OF APPROVAL (COAs)***

**Site Specific Conditions of Approval**

- No BLM surface COA's, private surface.

**DOWNHOLE PROGRAM  
CONDITIONS OF APPROVAL (COAs)**

**SITE SPECIFIC DOWNHOLE COAs:**

- The operator shall comply with all applicable requirement in the SOP (version: "Ute Tribe Green River Development Program", April 17, 2008). The operator shall also comply with applicable laws and regulations; with the lease terms, Onshore Oil and Gas Orders, NTL's; and with other orders and instructions of the authorized officer.

**All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to.** The following items are emphasized:

**DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS**

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth

(from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to [UT\\_VN\\_Welllogs@BLM.gov](mailto:UT_VN_Welllogs@BLM.gov). This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

## OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
  - Operator name, address, and telephone number.
  - Well name and number.
  - Well location ( $\frac{1}{4}$  Sec., Twn, Rng, and P.M.).
  - Date well was placed in a producing status (date of first production for which royalty will be paid).
  - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
  - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
  - Unit agreement and/or participating area name and number, if applicable.
  - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or

data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

STATE OF UTAH  
 DIVISION OF OIL, GAS AND MINING  
 ENTITY ACTION FORM -FORM 6

OPERATOR: **NEWFIELD PRODUCTION COMPANY**  
 ADDRESS: **RT. 3 BOX 3630**  
**MYTON, UT 84052**

OPERATOR ACCT. NO. **N2695**

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION				COUNTY	SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG			
A	99999	17921	4301350333	UTE TRIBAL 7-27-4-3	SWNE	27	4S	3W	DUCHESNE	1/4/2011	1/13/2011
WELL 1 COMMENTS: <i>GRRV</i>											
B	99999	17400	4301350234	Greater Mon Butte FEDERAL D-25-8-16	SESW	24 25	8S	16E	DUCHESNE	1/11/2010	1/13/2011
<i>GRRV</i> <i>BHL = Sec 25 NWNW</i>											
A	99999	17922	4301350334	UTE TRIBAL 8-27-4-3	SENE	27	4S	3W	DUCHESNE	1/10/2011	1/13/2011
<i>GRRV</i>											
B	99999	17400	4301350238	Greater Mon Butte FEDERAL S-26-8-16	SESE	26	8S	16E	DUCHESNE	1/10/2011	1/13/2011
<i>GRRV</i> <i>BHL = SESE</i>											
B	99999	17400	4301350236	Greater Mon Butte FEDERAL O-25-8-16	SENE	26 25	8S	16E	DUCHESNE	1/9/2011	1/13/2011
<i>GRRV</i> <i>BHL = Sec 25 SWNW</i>											
A	99999	17923	4301350335	UTE TRIBAL 9-27-4-3	NESE	27	4S	3W	DUCHESNE	1/7/2011	1/13/2011
<i>GRRV</i>											

ACTION CODES (See instructions on back of form)  
 A - 1 new entity for new well (single well only)  
 B - well to existing entity (group or unit well)  
 C - from one existing entity to another existing entity  
 D - well from one existing entity to a new entity  
 E - other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

RECEIVED  
 JAN 11 2011

Signature *Jentri Park*  
 Jentri Park  
 Production Clerk  
 01/11/11

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**SUNDRY NOTICES AND REPORTS ON WELLS**  
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

**SUBMIT IN TRIPLICATE - Other Instructions on page 2**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630  
Myton, UT 84052

3b. Phone (include area code)  
435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

NESE Section 27 T4S R3W

5. Lease Serial No.  
UTE TR EDA 14-20-H62-6154

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or

8. Well Name and No.  
UTE TRIBAL 9-27-4-3

9. API Well No.  
4301350335

10. Field and Pool, or Exploratory Area  
MYTON-TRIBAL EDA

11. County or Parish, State  
DUCHESNE, UT


**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Spud Notice _____
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	_____

13. Describe Proposed or Completed Operation: (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 1/7/2011 MIRU Ross #29. Spud well @8:00 AM. Drill 310' of 12 1/4" hole with air mist. TIH W/ 7 Jt's 8 5/8" J-55 24# csgn. Set @ 297.10'. On 1/14/11 cement with 160 sks of class "G" w/ 2% CaCL2 + 0.25#/sk Cello- Flake Mixed @ 15.8ppg w/ 1.17ft3/sk yield. Returned 5 barrels cement to pit. WOC.

**RECEIVED**  
**FEB 03 2011**  
DIV. OF OIL, GAS & MINING

I hereby certify that the foregoing is true and correct (Printed/ Typed) Adam Ferrari	Title Production Engineer
Signature 	Date 01/26/2011

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by .....	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on page 2)





<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> 14-20-H62-6154
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b>
<b>1. TYPE OF WELL</b> Oil Well	<b>8. WELL NAME and NUMBER:</b> UTE TRIBAL 9-27-4-3
<b>2. NAME OF OPERATOR:</b> NEWFIELD PRODUCTION COMPANY	<b>9. API NUMBER:</b> 43013503350000
<b>3. ADDRESS OF OPERATOR:</b> Rt 3 Box 3630 , Myton, UT, 84052	<b>PHONE NUMBER:</b> 435 646-4825 Ext
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 2030 FSL 0746 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: NESE Section: 27 Township: 04.0S Range: 03.0W Meridian: U	<b>9. FIELD and POOL or WILDCAT:</b> UNDESIGNATED  <b>COUNTY:</b> DUCHESNE  <b>STATE:</b> UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 2/8/2011	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input checked="" type="checkbox"/> OTHER	OTHER: <input type="text" value="APD Change"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield Production Company requests to amend the proposed depth for the Ute Tribal 9-27-4-3 from 6760' to 7275'. The new proposed depth will be 515' deeper than originally permitted. This change is necessary to give enough space for the rathole to complete the Basal Carbonate without having to drill out cement. The remainder of the APD will remain the same.

**Approved by the  
Utah Division of  
Oil, Gas and Mining**

Date: 02/15/2011  
By: 

<b>NAME (PLEASE PRINT)</b> Mandie Crozier	<b>PHONE NUMBER</b> 435 646-4825	<b>TITLE</b> Regulatory Tech
<b>SIGNATURE</b> N/A	<b>DATE</b> 2/9/2011	



## Daily Activity Report

Format For Sundry

**UTE TRIBAL 9-27-4-3**

**1/1/2011 To 5/30/2011**

**3/2/2011 Day: 1**

**Completion**

Rigless on 3/2/2011 - Test casing to 4500 psi. CBL/Perferate 1st stage. - RU Cameron BOP's. RU Hot Oiler & test casing & wellhead w/ valves to 4500 psi. RU Perforatyors LLC WLT, crane & packoff. RIH & run CBL under pressure. WLTD was 7188' w/ cmt top @ 47'. Perferate Wstch sds w/ 3 spf for total of 33 shots. SIFN w/ 171 bbls EWTR.

**Daily Cost:** \$0

**Cumulative Cost:** \$13,622

**3/7/2011 Day: 2**

**Completion**

Rigless on 3/7/2011 - Frac stgs. 1-3. Flowback. - Crew travel and safety meeting. RU BJ Services. Frac Stg 1- Wstch sds as shown in stimulation report. 1179.06 BWTR. - RU PSI wireline. Set CFTP @ 7030' & perf Wstch sds as shown in perforation report. RU BJ Services. Frac Stg 2- Wstch sds as shown in stimulation report. 2690.46 BWTR. - RU PSI wireline. Set CFTP @ 6645' & perf Wstch sds as shown in perforation report. RU BJ Services. Frac Stg 3- Wstch sds as shown in stimulation report. 3673.86 BWTR. - Open well to pit for immediate flowback @ approx. 3 bpm. Well flowed for 3 hrs. Recovered 1440 bbls. SWIFN.

**Daily Cost:** \$0

**Cumulative Cost:** \$162,585

**3/10/2011 Day: 3**

**Completion**

WWS #1 on 3/10/2011 - MIRUWOR, SN and pumping equip. TIH and then POOH and RD SN due to hydraulic issues. RU to set KP in the morning. - Crew travel and safety meeting. MIRUWOR and SU. MIRUHO to thaw well. SICP @ 1650. MIRU pumping equip and tank. RU to RIH. TAG out at casing head with 4-3/4" chomp bit. POOH and BO BOPS. MI RNI transport to transfer 277 BW from frac tanks. Pumped 10 BW down csg. Tried to TIH still tagging out at casing head. POOH and BO BOPS. Retrieved 4-5/8" bit from Newfield yard and swapped out with the 4-3/4" chomp bit on drill string. TIH and CO tight area @ casing head. POOH and BO BOPS. Break off 4-5-8" chomp bit and reinstall 4-3/4" chomp bit. TIH w/ five jts 2-7/8". SD due to hydraulic issues. POOH and RD SN. SWIFN. RD production BOPS and RU to set KP in the morning.

**Daily Cost:** \$0

**Cumulative Cost:** \$170,821

**3/11/2011 Day: 4**

**Completion**

WWS #1 on 3/11/2011 - Set kill at 6425' with Perforators Wireline. Drilled out plugs at 6425', 6645', and 7030'. Cleaned out well to PBTD at 7213', laid down 3 joints of tubing, and SWIFN. - Crew travel and safety meeting on rigging up wireline. Thaw out wellhead. Pressure on casing at 1500 psi. Pump 20 bbls down casing at 250 degF. Shut well in with 1750 psi. Rig up Perforators Wireline, run into hole, and set Weatherford kill plug at 6425'. Rig down wireline and nipple up production BOPs on top of frac BOPs. Rig up work floor and tubing equipment. Run in hole with 4-3/4" chomp bit and tubing. Tag kill plug at 6425', rig up Nabors power swivel, and drill out plug in 23 minutes. Run in hole with tubing, tag plug at 6645', and drill out plug in 14 minutes. Run in hole, tag plug at 7030', and drill out plug in 22 minutes. Run in

hole, tag fill at 7186', and clean out fill to PBTD at 7213'. - Circulate well clean, rack out power swivel, and lay down 3 joints of tubing to place end of tubing at 7123'. Gained 100 bbls of fluid. SWIFN at 6 pm with 2133 BWTR.

**Daily Cost:** \$0

**Cumulative Cost:** \$181,721

---

**3/14/2011 Day: 5**

**Completion**

WWS #1 on 3/14/2011 - Swab back fluid. No trace of oil. POOH with drill string. - Crew travel and safety meeting. SITP @ 1000, SICP @ 1000. RU to flow up tbg 47 Bbls until a light trickle of water. RU to swab tbg. Made 15 runs and received 165 BW- no trace of oil. Ending FL @ 3100'. RD swab equip and PU and RIH w/ 3 jts 2-7/8" tbg. No new fill. PBTD @ 7213'. RU to circ well w/ 180 BW. LD 6 jts and TOOH w/225 jts. SWIFWE. 20 min. SI @ 40 psi.

**Daily Cost:** \$0

**Cumulative Cost:** \$228,672

---

**3/15/2011 Day: 6**

**Completion**

WWS #1 on 3/15/2011 - Ran tubing with PBGA to place end of tubing at 7020.98' with top of the PBGA at 6920.36'. Primed pump and ran into hole with rods. Pressure tested pump and PWOP at 5:00 pm with 122" stroke length. - Crew travel and safety meeting on tripping pipe. Pressure on casing at 900 psi. Flow back 20 bbls of water. Trip into hole with tubing as follows: (1) bull plug, (3) joints 2-7/8" tubing, (1) nipple, (1) poor boy gas anchor, (1) joint 2-7/8" tubing, (1) pump seat nipple, (1) joint 2-7/8" tubing, (1) tubing anchor, and (220) joints 2-7/8" tubing. Rig down work floor, nipple down BOPs, and set tubing anchor at 6853.58'. Land tubing with 18,000 lbs of tension. Cross-over to rod equipment and prime Central Hydraulic 25-150-RHAC-20-4-21-24 pump. - Pick up and run into hole with rods as follows: (1) 1" x 4' stabilizer bar, (6) 1-1/2" x 25' weight bars, (168) 3/4" x 25' 4per guided rods, (99) 7/8" x 25' 4per guided rods, (1) 7/8" x 4' pony rod, (1) 7/8" x 2' pony rod, and (1) 1-1/2" x 30' polish rod. Hang rods and pressure test pump to 800 psi. Pump tested good. Rig down and PWOP at 5:00 pm with 122" stroke length. 1921 BWTR. **Finalized**

**Daily Cost:** \$0

**Cumulative Cost:** \$268,344

---

**Pertinent Files: Go to File List**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB NO. 1004-0137  
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well  Oil Well  Gas Well  Dry  Other  
 b. Type of Completion:  New Well  Work Over  Deepen  Plug Back  Diff. Resvr.,  
 Other: \_\_\_\_\_

5. Lease Serial No.  
14-20-H62-6378

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No.

2. Name of Operator  
NEWFIELD EXPLORATION COMPANY

8. Lease Name and Well No.  
UTE TRIBAL 9-27-4-3

3. Address  
1401 17TH ST. SUITE 1000 DENVER, CO 80202

3a. Phone No. (include area code)  
(435) 646-3721

9. AFI Well No.  
43-013-50335

4. Location of Well (Report location clearly and in accordance with Federal requirements)\*

At surface 2030' FSL & 746' FEL (NE/SE) SEC. 27, T4S, R3W

10. Field and Pool or Exploratory  
MYTON-TRIBAL EDA

11. Sec., T., R., M., on Block and  
Survey or Area  
SEC. 27, T4S, R3W

At top prod. interval reported below

12. County or Parish

DUCHESNE

13. State

UT

At total depth 7275'

14. Date Spudded  
01/07/2011

15. Date T.D. Reached  
02/09/2011

16. Date Completed 03/14/2011  
 D & A  Ready to Prod.

17. Elevations (DF, RKB, RT, GL)\*  
5659' GL 5671' KB

18. Total Depth: MD 7275'  
TVD

19. Plug Back T.D.: MD 7213'  
TVD

20. Depth Bridge Plug Set: MD  
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)  
DUAL IND GRD, SP, COMP. DENSITY, COMP. NEUTRON, GR, CALIPER, CMT BOND

22. Was well cored?  No  Yes (Submit analysis)  
Was DST run?  No  Yes (Submit report)  
Directional Survey?  No  Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	8-5/8" J-55	24#	0	309'		160 CLASS G			
7-7/8"	5-1/2" J-55	15.5#	0	7259'		325 PRIMLITE		47'	
						400 50/50 POZ			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-7/8"	EOT@ 7021'	TA @ 6854'						

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Wasatch	6476'	7177'	7072-7177'	.36"	33	
B)			6476-6985'	.34"	69	
C)						
D)						

26. Perforation Record

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Depth Interval	Amount and Type of Material
6476-7177'	Frac w/ 214904#'s 20/40 sand in 2658 bbls of Lightning 17 fluid in 3 stages

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
03/10/11	03/29/11	24	→	7.44	5.00	11.22			2-1/2" x 1-1/2" x 20' x 24' RHAC Pump
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→					PRODUCING	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

RECEIVED

APR 11 2011

\*(See instructions and spaces for additional data on page 2)

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

29. Disposition of Gas (Solid, used for fuel, vented, etc.)

USED FOR FUEL

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

GEOLOGICAL MARKERS

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
WASATCH	6476'	7177'		GARDEN GULCH MRK	3890'
				GARDEN GULCH 1	4133'
				GARDEN GULCH 2	4259'
				POINT 3	4549'
				X MRKR	4805'
				Y MRKR	4841'
DOUGALS CREEK MRK				BI CARBONATE MRK	4955'
					5219'
B LIMESTON MRK				CASTLE PEAK	5359'
					5902'
BASAL CARBONATE				WASATCH	6321'
					6453'

32. Additional remarks (include plugging procedure):

RECEIVED

APR 11 2011

DIV. OF OIL, GAS & MINING


33. Indicate which items have been attached by placing a check in the appropriate boxes:

- Electrical/Mechanical Logs (1 full set req'd.)     
  Geologic Report     
  DST Report     
  Directional Survey  
 Sundry Notice for plugging and cement verification     
  Core Analysis     
 Other: Drilling Daily Activity

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)\*

Name (please print) Lucy Chavez-Naupoto

Title Administrative Assistant

Signature 

Date 03/31/2011

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**Daily Activity Report****Format For Sundry****UTE TRIBAL 9-27-4-3****12/1/2010 To 4/28/2011****UTE TRIBAL 9-27-4-3****Waiting on Cement****Date:** 1/26/2011

Ross #29 at 310. Days Since Spud - ( Guide Shoe, Shoe Joint, Baffle Plate, and 6jts Casing ) & set @ 297.10. On 1/14/11 BJ Cemented - On 1/7/11 Ross # 29 Spud and drilled 310' of 12 1/4" hole. On 1/7/11 Ran 8 5/8" Casing - 8 5/8" Casing W/ 240 sks Class "G"+2%CaCl Mixed @ 15.8ppg W/1.17yield Returned 5bbbls to pit

**Daily Cost:** \$0**Cumulative Cost:** \$46,084**UTE TRIBAL 9-27-4-3****Rigging down****Date:** 2/4/2011

NDSI #3 at 310. 0 Days Since Spud - Prepare to move

**Daily Cost:** \$0**Cumulative Cost:** \$47,734**UTE TRIBAL 9-27-4-3****Drill 7 7/8" hole with fresh water****Date:** 2/5/2011

NDSI #3 at 1182. 1 Days Since Spud - MIRU - Test BOP; All valves, choke man., choke hose, rams blind and pipe, kelly 2000psi for 10min. - Finish rig up - Pick up BHA & scribe tools - Drill 7 7/8" hole w/fresh water from 273' to 1182' WOB/15,TGPM/400,TRPM/165,ROP/126 - Surface casing 1500psi for 30min.

**Daily Cost:** \$0**Cumulative Cost:** \$137,866**UTE TRIBAL 9-27-4-3****Drill 7 7/8" hole with fresh water****Date:** 2/6/2011

NDSI #3 at 3418. 2 Days Since Spud - Drill 7 7/8" hole w/fresh water from 1182' to 3418' WOB/122,TGPM/400,TRPM/165,ROP/98

**Daily Cost:** \$0**Cumulative Cost:** \$157,776**UTE TRIBAL 9-27-4-3****Drill 7 7/8" hole with fresh water****Date:** 2/7/2011

NDSI #3 at 5183. 3 Days Since Spud - Drill 7 7/8" hole w/fresh water from 3860' to 5183' WOB/122,TGPM/400,TRPM/165,ROP/75 - Rig service - Drill 7 7/8" hole w/fresh water from 3418' to 3860' WOB/122,TGPM/400,TRPM/165,ROP/73

**Daily Cost:** \$0**Cumulative Cost:** \$177,686**RECEIVED****APR 11 2011****UTE TRIBAL 9-27-4-3****Circulate & Condition Hole****Date:** 2/8/2011

NDSI #3 at 7275. 4 Days Since Spud - Circulate - Rig Service - Drill 7 7/8" hole w/fresh water from 5183' to 6191' WOB/122,TGPM/400,TRPM/165,ROP/101 - Adjust brakes - Drill 7 7/8" hole w/fresh water from 6191' to 7275' WOB/122,TGPM/400,TRPM/165,ROP/101

**Daily Cost:** \$0

DIV. OF OIL, GAS &amp; MINING

**Cumulative Cost:** \$226,241

---

**UTE TRIBAL 9-27-4-3**

**Wait on Completion**

**Date:** 2/9/2011

NDSI #3 at 7275. 5 Days Since Spud - 400 tail;50:50:2+3%KCL+.5%EC-

1+.25#CF+.5#SF+.3SMS+FP-6L - Cement W/BJ 325 lead;PLII +3%

KCL+5#CSE+.5#CF+2#KOL+.5SMS+FP+SF - Circulate w/rig - Run 171jts of 5.5-15.5-j55

casing set @ 7259.03'KB - Change and test rams. 2000psi for 10min. - Clean mud Tanks -

LDDP & BHA - Displsce hole w/brine - Wait on brine - Log w/Haliburton; Tripple combo W/Dual lateral log.

**Daily Cost:** \$0

**Cumulative Cost:** \$392,196

---

**UTE TRIBAL 9-27-4-3**

**Wait on Completion**

**Date:** 2/10/2011

NDSI #3 at 7275. 6 Days Since Spud - Clean mud tanks - Release Rig @ 8:00am **Finalized**

**Daily Cost:** \$0

**Cumulative Cost:** \$393,646

---

**Pertinent Files: [Go to File List](#)**

**RECEIVED**

**APR 11 2011**

**DIV. OF OIL, GAS & MINING**

STATE OF UTAH  
 DIVISION OF OIL, GAS AND MINING  
 ENTITY ACTION FORM -FORM 6

OPERATOR: NEWFIELD PRODUCTION COMPANY  
 ADDRESS: RT. 3 BOX 3630  
MYTON, UT 84052

OPERATOR ACCT. NO. N2695

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
E	17953	17953	4301350299	STEWART 1A-29-4-2	NENE	29	4S	2W	DUCHESNE	2/2/2011	3/18/11
WELL 1 COMMENTS: CHANGE F/ GRRV TO GR-WS FORMATION											
											4/28/11
E	17954	17954	4301350322	UTE TRIBAL 8-17-4-2	SENE	17	4S	2W	DUCHESNE	2/14/2011	3/18/11
CHANGE F/ GRRV TO GR-WS FORMATION											
											4/28/11
E	17923	17923	4301350335	UTE TRIBAL 9-27-4-3	NESE	27	4S	3W	DUCHESNE	1/7/2011	3/14/11
CHANGE F/ GRRV TO GR-WS FORMATION											
											4/28/11
E	17909	17909	4301350353	UTE TRIBAL 6-7-4-2	SENW	7	4S	2W	DUCHESNE	12/18/2010	3/17/11
CHANGE F/ GRRV TO GR-WS FORMATION											
											4/28/11
E	17961	17961	4301350393	UTE TRIBAL 14-18-4-2	SESW	18	4S	2W	DUCHESNE	2/14/2011	3/22/11
CHANGE F/ GRRV TO GR-WS FORMATION											
											4/28/11
E	17929	17929	4301350399	MEAGHER 9-20-4-2	NESE	20	4S	2W	DUCHESNE	1/24/2011	3/11/11
CHANGE F/ GRRV TO GR-WS FORMATION											
											4/28/11

- ACTION CODES (See instructions on back of form)
- A - 1 new entity for new well (single well only)
  - B - well to existing entity (group or unit well)
  - C - from one existing entity to another existing entity
  - D - well from one existing entity to a new entity
  - E - other (explain in comments section)

RECEIVED  
 APR 28 2011

  
 Signature  
 Jentri Park  
 Production Clerk  
 04/28/11

NOTE: Use COMMENT section to explain why each Action Code was selected.

DIV. OF OIL, GAS & MINING

Spud

BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# Ross 29 Submitted By  
Adam Ferrari Phone Number 435-823-6740  
Well Name/Number Ute Tribal 9-27-4-3  
Qtr/Qtr NE/SE Section 27 Township 4S Range 3W  
Lease Serial Number 14-20-H62-6154  
API Number 43-013-50335

Spud Notice – Spud is the initial spudding of the well, not drilling  
out below a casing string.

Date/Time 1/7/2011 8:00 AM  PM

Casing – Please report time casing run starts, not cementing  
times.

- Surface Casing
- Intermediate Casing
- Production Casing
- Liner
- Other

Date/Time 1/7/2011 2:00PM AM  PM

BOPE

- Initial BOPE test at surface casing point
- BOPE test at intermediate casing point
- 30 day BOPE test
- Other

Date/Time \_\_\_\_\_ AM  PM

Remarks \_\_\_\_\_

---

Spud

BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# Ross 29 Submitted By  
Adam Ferrari Phone Number 435-823-6740  
Well Name/Number Ute Tribal 9-27-4-3  
Qtr/Qtr NE/SE Section 27 Township 4S Range 3W  
Lease Serial Number 14-20-H62-6154  
API Number 43-013-50335

Spud Notice – Spud is the initial spudding of the well, not drilling  
out below a casing string.

Date/Time 1/7/2011 8:00 AM  PM

Casing – Please report time casing run starts, not cementing  
times.

- Surface Casing
- Intermediate Casing
- Production Casing
- Liner
- Other

Date/Time 1/7/2011 2:00PM AM  PM

BOPE

- Initial BOPE test at surface casing point
- BOPE test at intermediate casing point
- 30 day BOPE test
- Other

Date/Time \_\_\_\_\_ AM  PM

Remarks \_\_\_\_\_

---