


| STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS AND MINING | | | | | FORM 3 AMENDED REPORT <input type="checkbox"/> | |
|---|-------------------|--|--|---|---|-----------------|
| APPLICATION FOR PERMIT TO DRILL | | | | 1. WELL NAME and NUMBER Greater Monument Butte N-23-8-17 | | |
| 2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/> | | | | 3. FIELD OR WILDCAT MONUMENT BUTTE | | |
| 4. TYPE OF WELL Oil Well Coalbed Methane Well: NO | | | | 5. UNIT or COMMUNITIZATION AGREEMENT NAME GMBU (GRRV) | | |
| 6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY | | | | 7. OPERATOR PHONE 435 646-4825 | | |
| 8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Myton, UT, 84052 | | | | 9. OPERATOR E-MAIL mcrozier@newfield.com | | |
| 10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UTU-76239 | | 11. MINERAL OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/> | | 12. SURFACE OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/> | | |
| 13. NAME OF SURFACE OWNER (if box 12 = 'fee') | | | | 14. SURFACE OWNER PHONE (if box 12 = 'fee') | | |
| 15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee') | | | | 16. SURFACE OWNER E-MAIL (if box 12 = 'fee') | | |
| 17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN') | | 18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/> | | 19. SLANT VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/> | | |
| 20. LOCATION OF WELL | FOOTAGES | QTR-QTR | SECTION | TOWNSHIP | RANGE | MERIDIAN |
| LOCATION AT SURFACE | 1874 FSL 723 FWL | NWSW | 23 | 8.0 S | 17.0 E | S |
| Top of Uppermost Producing Zone | 2373 FSL 1131 FWL | NWSW | 23 | 8.0 S | 17.0 E | S |
| At Total Depth | 2606 FNL 1374 FWL | SENE | 23 | 8.0 S | 17.0 E | S |
| 21. COUNTY DUCHESE | | 22. DISTANCE TO NEAREST LEASE LINE (Feet) 1374 | | 23. NUMBER OF ACRES IN DRILLING UNIT 20 | | |
| | | 25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 1714 | | 26. PROPOSED DEPTH MD: 6688 TVD: 6688 | | |
| 27. ELEVATION - GROUND LEVEL 5109 | | 28. BOND NUMBER WYB000493 | | 29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 437478 | | |
| ATTACHMENTS | | | | | | |
| VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES | | | | | | |
| <input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER | | | <input checked="" type="checkbox"/> COMPLETE DRILLING PLAN | | | |
| <input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE) | | | <input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER | | | |
| <input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED) | | | <input checked="" type="checkbox"/> TOPOGRAPHICAL MAP | | | |
| NAME Mandie Crozier | | TITLE Regulatory Tech | | PHONE 435 646-4825 | | |
| SIGNATURE | | DATE 12/08/2010 | | EMAIL mcrozier@newfield.com | | |
| API NUMBER ASSIGNED 43013505300000 | | APPROVAL  Permit Manager | | | | |

| Proposed Hole, Casing, and Cement | | | | | | |
|-----------------------------------|-----------------|-------------|----------|-------------|--|--|
| String | Hole Size | Casing Size | Top (MD) | Bottom (MD) | | |
| Prod | 7.875 | 5.5 | 0 | 6688 | | |
| Pipe | Grade | Length | Weight | | | |
| | Grade J-55 LT&C | 6688 | 15.5 | | | |
| | | | | | | |

| Proposed Hole, Casing, and Cement | | | | | | |
|-----------------------------------|-----------------|-------------|----------|-------------|--|--|
| String | Hole Size | Casing Size | Top (MD) | Bottom (MD) | | |
| Surf | 12.25 | 8.625 | 0 | 300 | | |
| Pipe | Grade | Length | Weight | | | |
| | Grade J-55 ST&C | 300 | 24.0 | | | |
| | | | | | | |

NEWFIELD PRODUCTION COMPANY
GREATER MONUMENT BUTTE N-23-8-17
AT SURFACE: NW/SW SECTION 23, T8S, R17E
DUCHESNE COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

| | |
|--------------------|--------------|
| Uinta | 0' – 1860' |
| Green River | 1860' |
| Wasatch | 6570' |
| Proposed TD | 6688' |

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil) 1860' – 6570'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

| | |
|--|---|
| Location & Sampled Interval | Date Sampled |
| Flow Rate | Temperature |
| Hardness | pH |
| Water Classification (State of Utah) | Dissolved Calcium (Ca) (mg/l) |
| Dissolved Iron (Fe) (ug/l) | Dissolved Sodium (Na) (mg/l) |
| Dissolved Magnesium (Mg) (mg/l) | Dissolved Carbonate (CO ₃) (mg/l) |
| Dissolved Bicarbonate (NaHCO ₃) (mg/l) | Dissolved Chloride (Cl) (mg/l) |
| Dissolved Sulfate (SO ₄) (mg/l) | Dissolved Total Solids (TDS) (mg/l) |

4. PROPOSED CASING PROGRAM

a. Casing Design: Greater Monument Butte N-23-8-17

| Size | Interval | | Weight | Grade | Coupling | Design Factors | | |
|--------------------------|----------|--------|--------|-------|----------|----------------|----------------|------------------|
| | Top | Bottom | | | | Burst | Collapse | Tension |
| Surface casing 8-5/8" | 0' | 300' | 24.0 | J-55 | STC | 2,950 17.53 | 1,370 14.35 | 244,000 33.89 |
| Prod casing 5-1/2" | 0' | 6,688' | 15.5 | J-55 | LTC | 4,810 2.26 | 4,040 1.90 | 217,000 2.09 |

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg
 Pore pressure at surface casing shoe = 8.33 ppg
 Pore pressure at prod casing shoe = 8.33 ppg
 Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. Cementing Design: Greater Monument Butte N-23-8-17

| Job | Fill | Description | Sacks | OH Excess* | Weight (ppg) | Yield (ft ³ /sk) |
|---------------------|--------|-------------------------------------|-----------------|---------------|-----------------|--------------------------------|
| | | | ft ³ | | | |
| Surface casing | 300' | Class G w/ 2% CaCl | 138 161 | 30% | 15.8 | 1.17 |
| Prod casing Lead | 4,688' | Prem Lite II w/ 10% gel + 3% KCl | 324 1056 | 30% | 11.0 | 3.26 |
| Prod casing Tail | 2,000' | 50/50 Poz w/ 2% gel + 3% KCl | 363 451 | 30% | 14.3 | 1.24 |

- *Actual volume pumped will be 15% over the caliper log
- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
 - Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ±350 feet will be drilled with an air/mist system. The air rig is equipped with a 6 ½" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ±350 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**


No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the first quarter of 2011, and take approximately seven (7) days from spud to rig release.

T8S, R17E, S.L.B.&M.

NEWFIELD EXPLORATION COMPANY

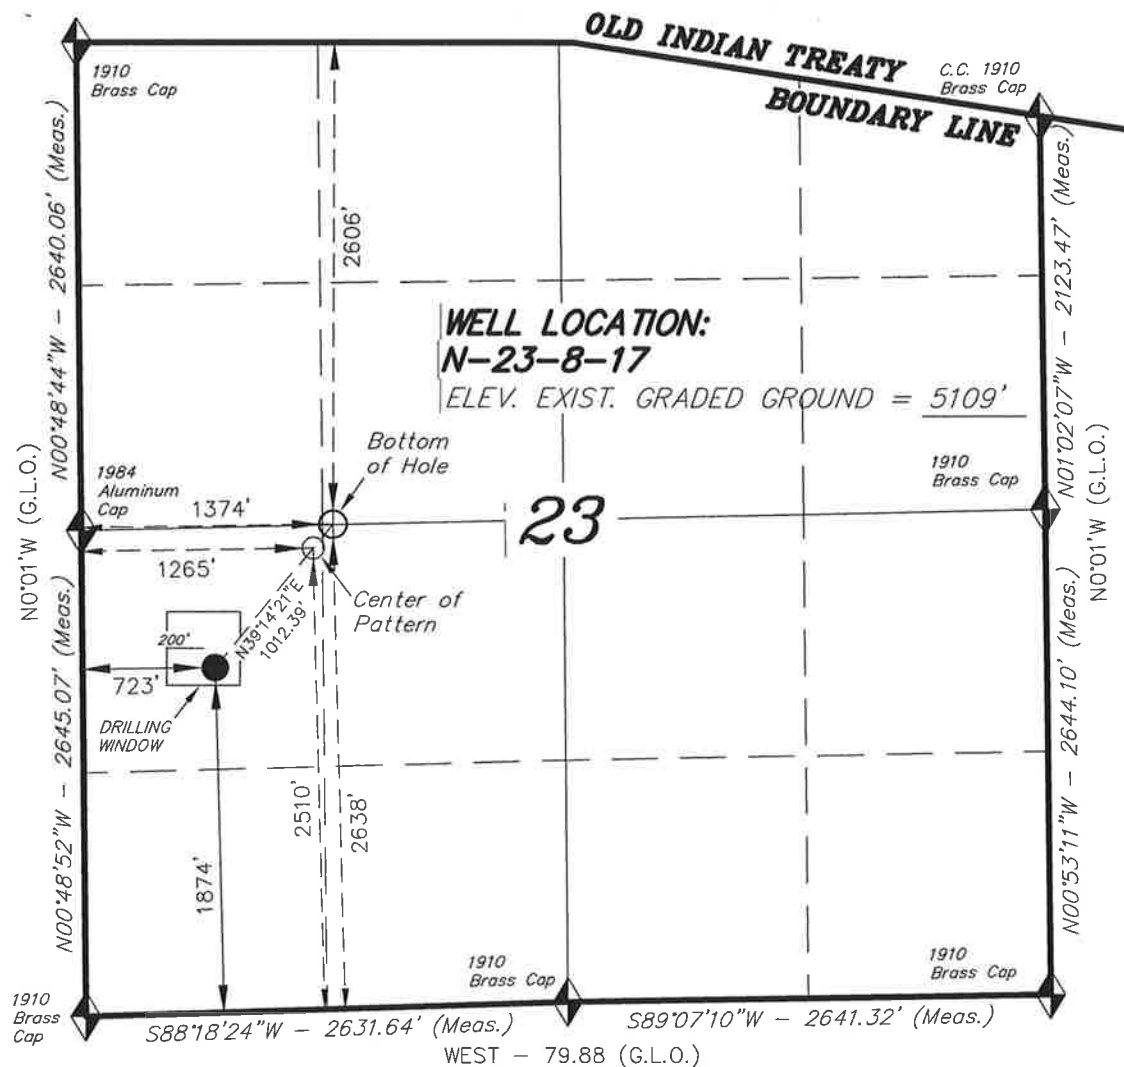

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV; Elevations are base on LOCATION: an N.G.S. OPUS Correction.
 LAT. 40°04'09.56" LONG. 110°00'43.28"
 (Tristate Aluminum Cap) Elev. 5281.57'

N-23-8-17
 (Surface Location) NAD 83
 LATITUDE = 40° 06' 04.82"
 LONGITUDE = 109° 58' 49.99"

WELL LOCATION, N-23-8-17, LOCATED AS SHOWN IN THE NW 1/4 SW 1/4 OF SECTION 23, T8S, R17E, S.L.B.&M. DUCHESNE COUNTY, UTAH.

TARGET BOTTOM HOLE, N-23-8-17, LOCATED AS SHOWN IN THE SE 1/4 NW 1/4 OF SECTION 23, T8S, R17E, S.L.B.&M. DUCHESNE COUNTY, UTAH.

**NOTES:**

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.


THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

**TRI STATE LAND SURVEYING & CONSULTING**

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
 (435) 781-2501

| | |
|----------------------------|-------------------|
| DATE SURVEYED: 08-18-10 | SURVEYED BY: S.V. |
| DATE DRAWN: 10-05-10 | DRAWN BY: M.W. |
| REVISED: | SCALE: 1" = 1000' |

Access Road Map

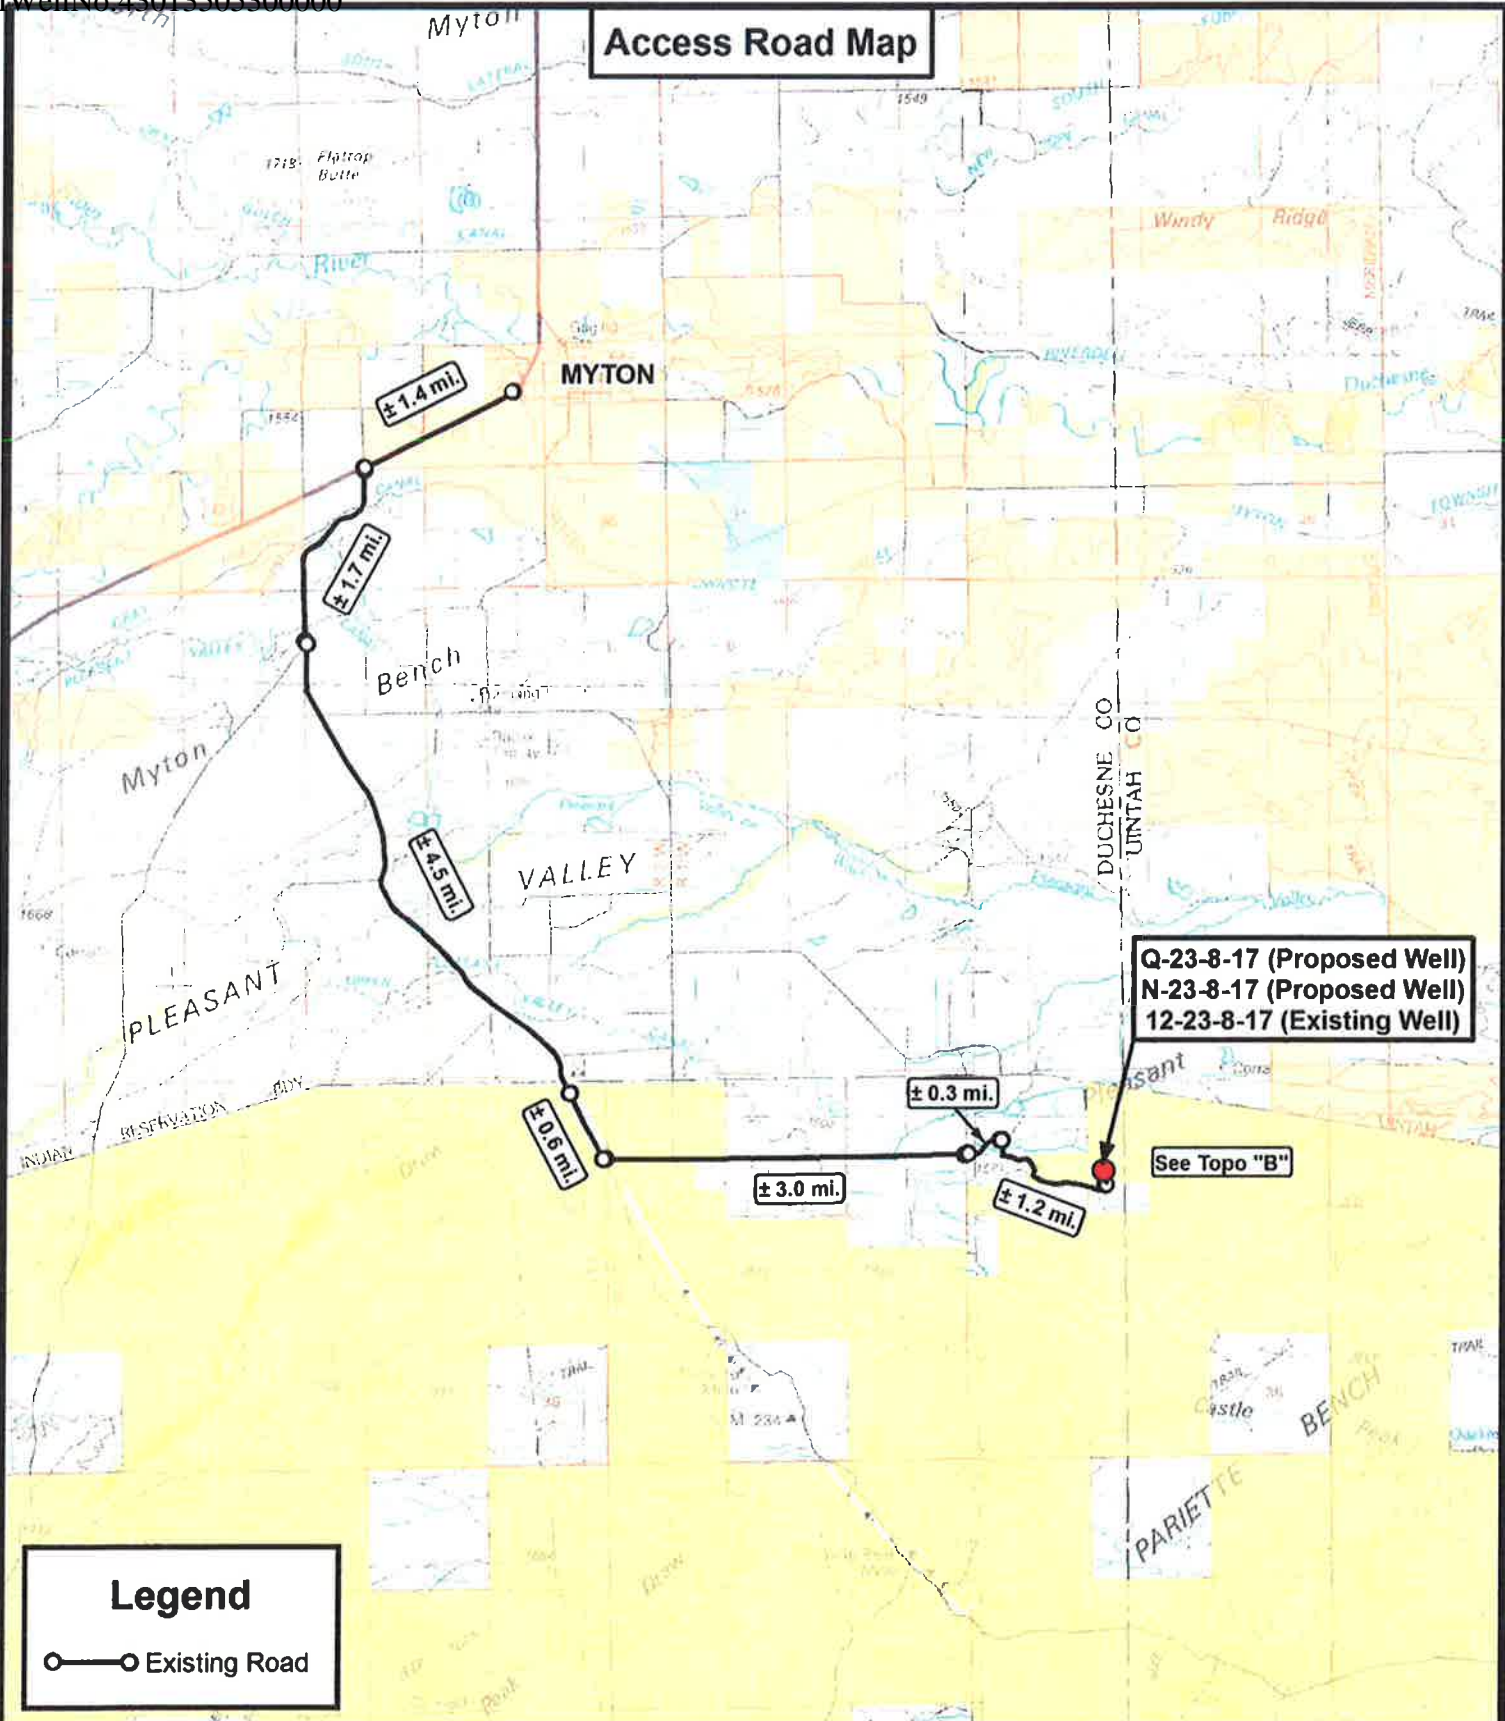

Legend

— Existing Road



Tri State
Land Surveying, Inc.

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

Q-23-8-17 (Proposed Well)
N-23-8-17 (Proposed Well)
12-23-8-17 (Existing Well)

SEC. 23, T8S, R17E, S.L.B.&M. Duchesne County, UT.


TOPOGRAPHIC MAP

SHEET

A

DRAWN BY: C.H.M.
DATE: 09-17-2010
SCALE: 1:100,000

Access Road Map

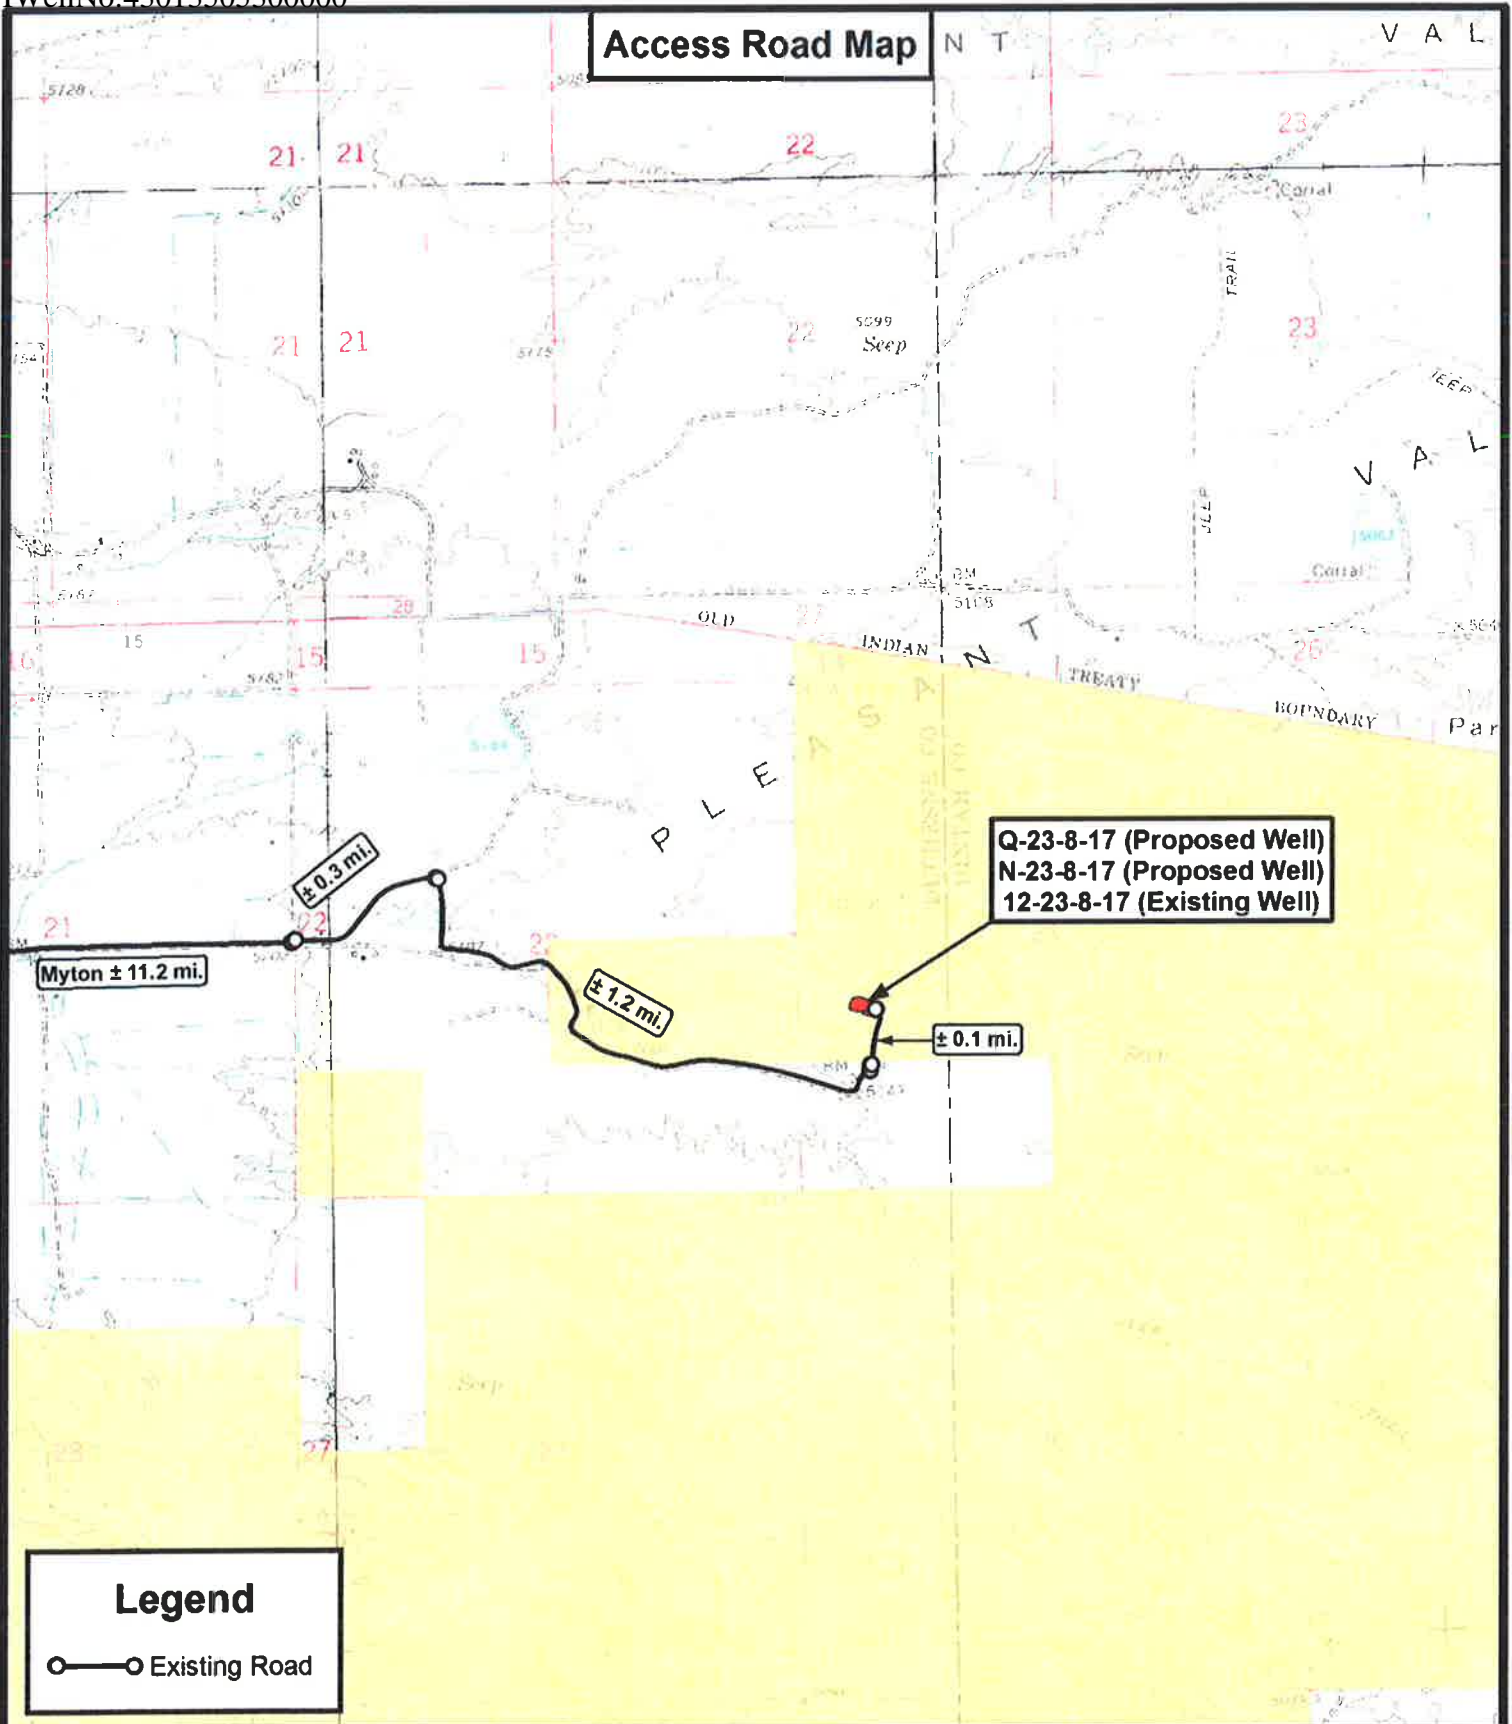

Legend

— Existing Road



Tri State
Land Surveying, Inc.

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

Q-23-8-17 (Proposed Well)
N-23-8-17 (Proposed Well)
12-23-8-17 (Existing Well)

SEC. 23, T8S, R17E, S.L.B.&M. Duchesne County, UT.


TOPOGRAPHIC MAP

SHEET

B

| | |
|-----------|-------------|
| DRAWN BY: | C.H.M. |
| DATE: | 09-17-2010 |
| SCALE: | 1" = 2,000' |

Proposed Pipeline Map

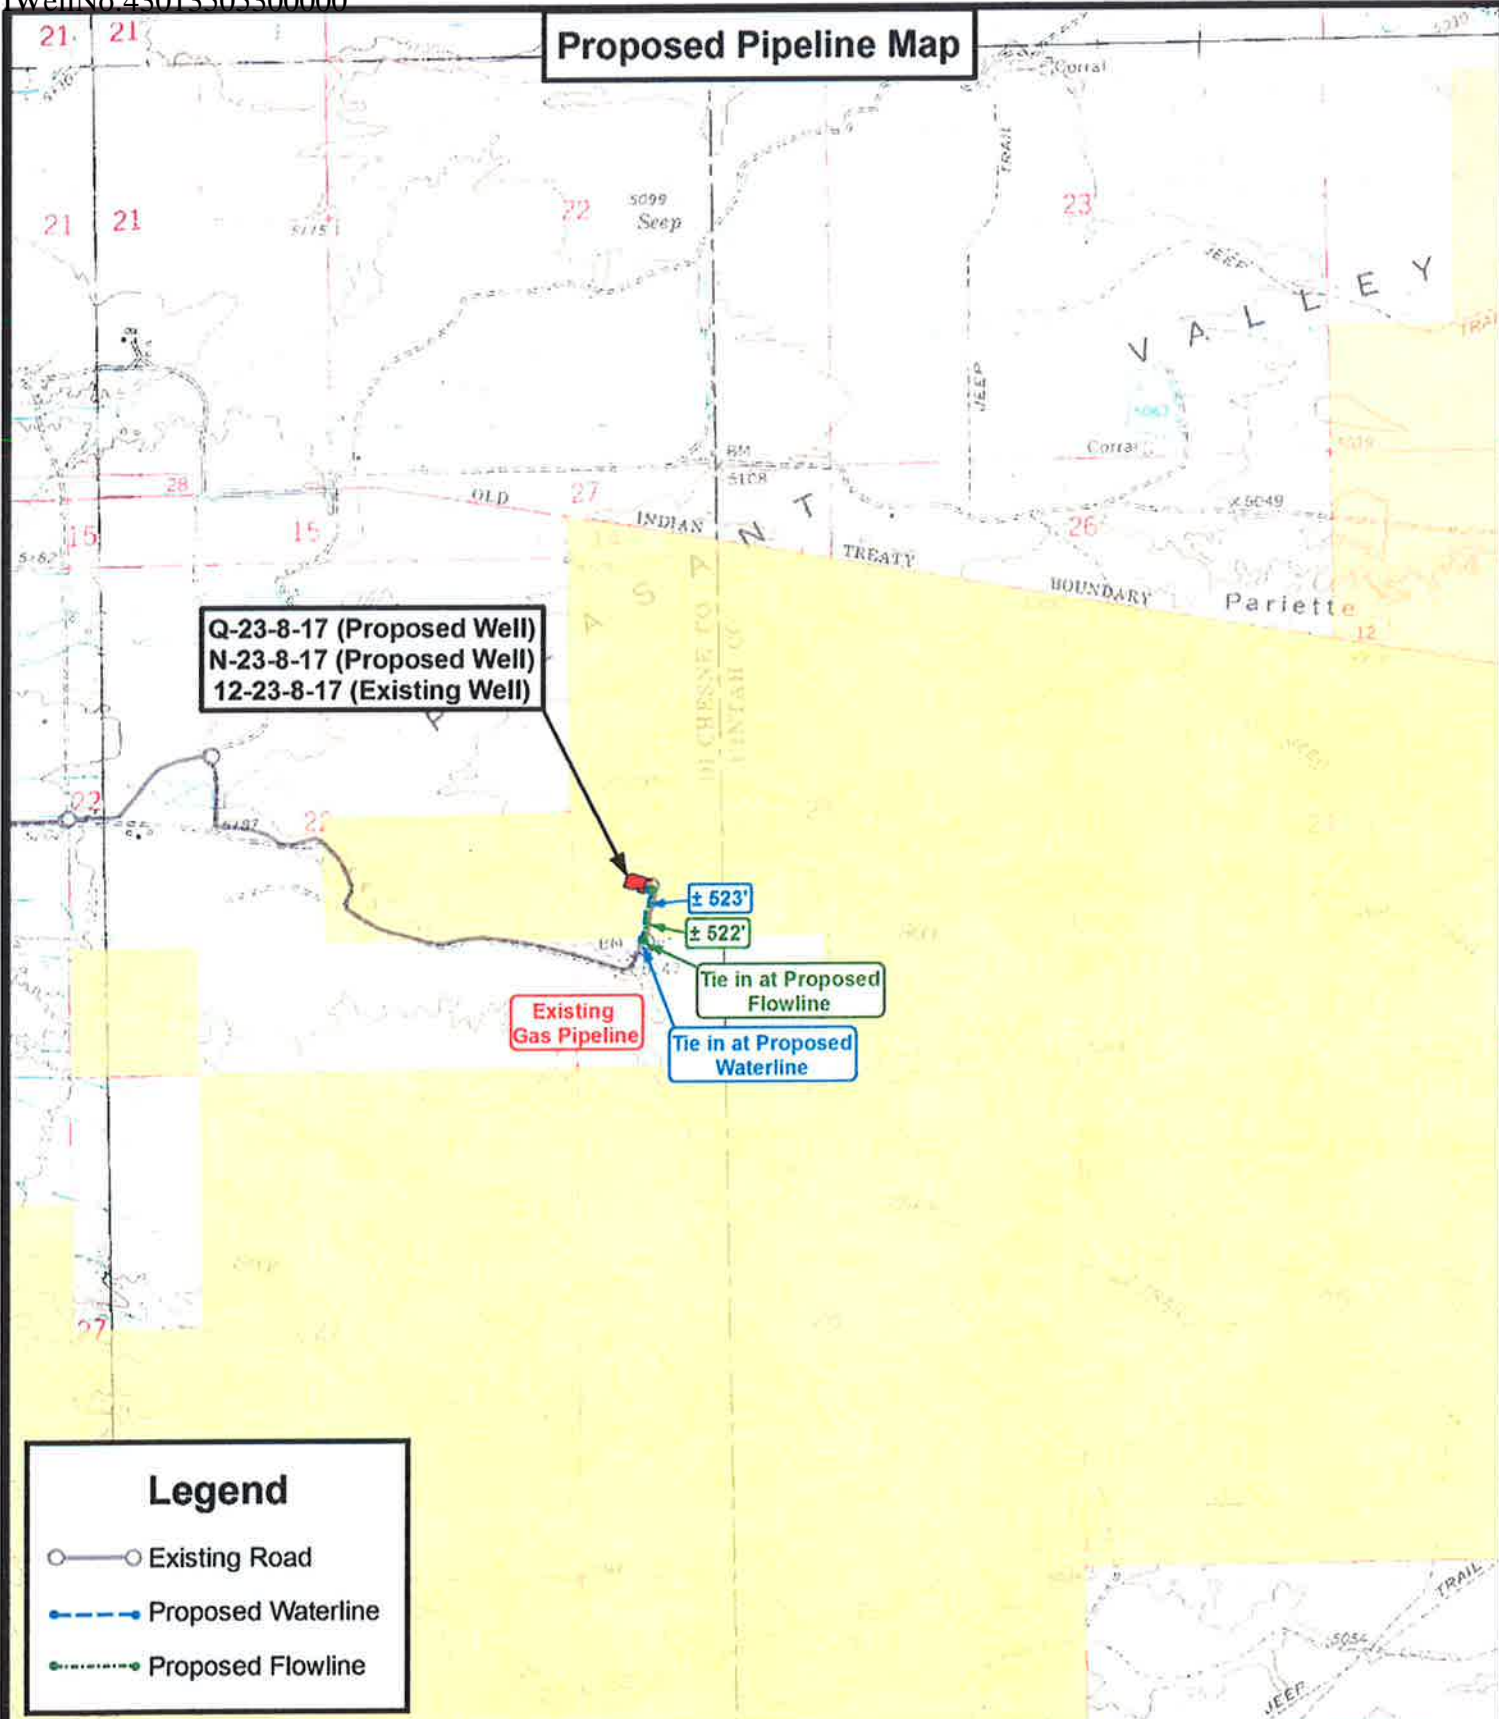

Legend

- Existing Road
- Proposed Waterline
- Proposed Flowline



Tri State
Land Surveying, Inc.

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

Q-23-8-17 (Proposed Well)
N-23-8-17 (Proposed Well)
12-23-8-17 (Existing Well)

SEC. 23, T8S, R17E, S.L.B.&M. Duchesne County, UT.


DRAWN BY: C.H.M.
DATE: 09-17-2010
SCALE: 1" = 2,000'

TOPOGRAPHIC MAP

SHEET
C

Exhibit "B" Map

Q-23-8-17 (Proposed Well)
N-23-8-17 (Proposed Well)
12-23-8-17 (Existing Well)

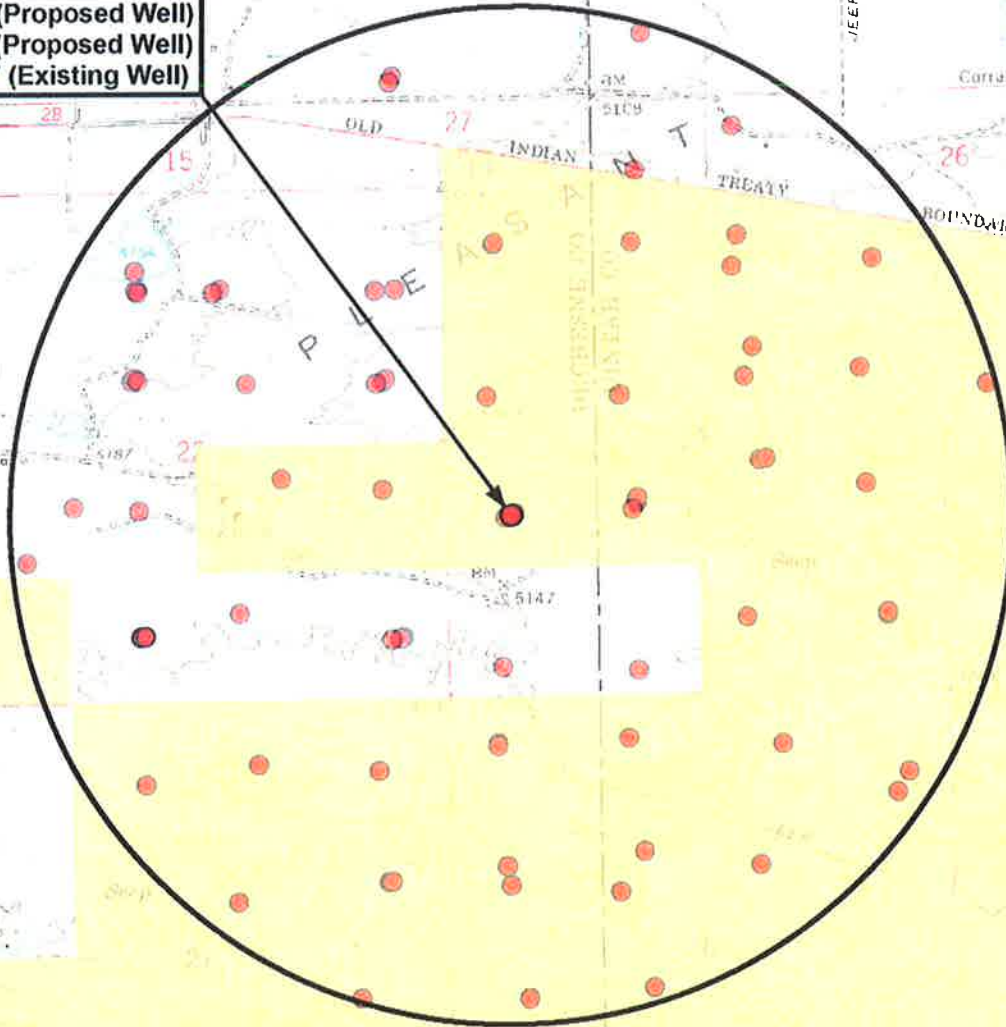

Legend

- 1 Mile Radius
- Proposed Location

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

Q-23-8-17 (Proposed Well)
N-23-8-17 (Proposed Well)
12-23-8-17 (Existing Well)
SEC. 23, T8S, R17E, S.L.B.&M. Duchesne County, UT.

TOPOGRAPHIC MAP

SHEET
D

DRAWN BY: C.H.M.
DATE: 09-17-2010
SCALE: 1" = 2,000'



NEWFIELD EXPLORATION

**USGS Myton SW (UT)
SECTION 23 T8S, R17E
N-23-8-17**

Wellbore #1

Plan: Design #1

Standard Planning Report

04 October, 2010



NEWFIELD



PayZone Directional Services, LLC.

Planning Report



Database: EDM 2003.21 Single User Db
Company: NEWFIELD EXPLORATION
Project: USGS Myton SW (UT)
Site: SECTION 23 T8S, R17E
Well: N-23-8-17
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well N-23-8-17
TVD Reference: N-23-8-17 @ 5121.0ft (Original Well Elev)
MD Reference: N-23-8-17 @ 5121.0ft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature

Project USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA
Map System: US State Plane 1983
Geo Datum: North American Datum 1983
Map Zone: Utah Central Zone
System Datum: Mean Sea Level

Site SECTION 23 T8S, R17E

Site Position: **From:** Map
Position Uncertainty: 0.0 ft
Northing: 7,207,900.00 ft
Easting: 2,064,500.00 ft
Slot Radius: "
Latitude: 40° 5' 51.665 N
Longitude: 109° 59' 2.132 W
Grid Convergence: 0.97 °

Well N-23-8-17, SHL LAT: 40° 06' 04.82, LONG: -109° 58' 49.99

Well Position **+N/-S** 1,331.0 ft **Northing:** 7,209,246.88 ft **Latitude:** 40° 6' 4.820 N
+E/-W 943.5 ft **Easting:** 2,065,420.75 ft **Longitude:** 109° 58' 49.990 W
Position Uncertainty 0.0 ft **Wellhead Elevation:** ft **Ground Level:** 5,109.0 ft

Wellbore Wellbore #1

| Magnetics | Model Name | Sample Date | Declination (°) | Dip Angle (°) | Field Strength (nT) |
|-----------|------------|-------------|-----------------|---------------|---------------------|
| | IGRF2010 | 2010/10/04 | 11.38 | 65.88 | 52,385 |

Design Design #1

Audit Notes:

Version: **Phase:** PROTOTYPE **Tie On Depth:** 0.0

| Vertical Section: | Depth From (TVD) (ft) | +N/-S (ft) | +E/-W (ft) | Direction (°) |
|-------------------|-----------------------|------------|------------|---------------|
| | 5,650.0 | 0.0 | 0.0 | 39.24 |

Plan Sections

| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) | TFO (°) | Target |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|----------------------|---------------------|---------|---------------|
| 0.0 | 0.00 | 0.00 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 600.0 | 0.00 | 0.00 | 600.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 1,275.9 | 10.14 | 39.24 | 1,272.4 | 46.2 | 37.7 | 1.50 | 1.50 | 0.00 | 39.24 | |
| 5,723.0 | 10.14 | 39.24 | 5,650.0 | 652.5 | 532.9 | 0.00 | 0.00 | 0.00 | 0.00 | N-23-8-17 TGT |
| 6,688.0 | 10.14 | 39.24 | 6,600.0 | 784.1 | 640.4 | 0.00 | 0.00 | 0.00 | 0.00 | |

NEWFIELD



PayZone Directional Services, LLC.

Planning Report



Database: EDM 2003.21 Single User Db
Company: NEWFIELD EXPLORATION
Project: USGS Myton SW (UT)
Site: SECTION 23 T8S, R17E
Well: N-23-8-17
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well N-23-8-17
TVD Reference: N-23-8-17 @ 5121.0ft (Original Well Elev)
MD Reference: N-23-8-17 @ 5121.0ft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| 0.0 | 0.00 | 0.00 | 0.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 100.0 | 0.00 | 0.00 | 100.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 200.0 | 0.00 | 0.00 | 200.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 300.0 | 0.00 | 0.00 | 300.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 400.0 | 0.00 | 0.00 | 400.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 500.0 | 0.00 | 0.00 | 500.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 600.0 | 0.00 | 0.00 | 600.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 700.0 | 1.50 | 39.24 | 700.0 | 1.0 | 0.8 | 1.3 | 1.50 | 1.50 | 0.00 |
| 800.0 | 3.00 | 39.24 | 799.9 | 4.1 | 3.3 | 5.2 | 1.50 | 1.50 | 0.00 |
| 900.0 | 4.50 | 39.24 | 899.7 | 9.1 | 7.4 | 11.8 | 1.50 | 1.50 | 0.00 |
| 1,000.0 | 6.00 | 39.24 | 999.3 | 16.2 | 13.2 | 20.9 | 1.50 | 1.50 | 0.00 |
| 1,100.0 | 7.50 | 39.24 | 1,098.6 | 25.3 | 20.7 | 32.7 | 1.50 | 1.50 | 0.00 |
| 1,200.0 | 9.00 | 39.24 | 1,197.5 | 36.4 | 29.7 | 47.0 | 1.50 | 1.50 | 0.00 |
| 1,275.9 | 10.14 | 39.24 | 1,272.4 | 46.2 | 37.7 | 59.6 | 1.50 | 1.50 | 0.00 |
| 1,300.0 | 10.14 | 39.24 | 1,296.1 | 49.5 | 40.4 | 63.9 | 0.00 | 0.00 | 0.00 |
| 1,400.0 | 10.14 | 39.24 | 1,394.5 | 63.1 | 51.5 | 81.5 | 0.00 | 0.00 | 0.00 |
| 1,500.0 | 10.14 | 39.24 | 1,493.0 | 76.7 | 62.7 | 99.1 | 0.00 | 0.00 | 0.00 |
| 1,600.0 | 10.14 | 39.24 | 1,591.4 | 90.4 | 73.8 | 116.7 | 0.00 | 0.00 | 0.00 |
| 1,700.0 | 10.14 | 39.24 | 1,689.9 | 104.0 | 85.0 | 134.3 | 0.00 | 0.00 | 0.00 |
| 1,800.0 | 10.14 | 39.24 | 1,788.3 | 117.6 | 96.1 | 151.9 | 0.00 | 0.00 | 0.00 |
| 1,900.0 | 10.14 | 39.24 | 1,886.7 | 131.3 | 107.2 | 169.5 | 0.00 | 0.00 | 0.00 |
| 2,000.0 | 10.14 | 39.24 | 1,985.2 | 144.9 | 118.4 | 187.1 | 0.00 | 0.00 | 0.00 |
| 2,100.0 | 10.14 | 39.24 | 2,083.6 | 158.5 | 129.5 | 204.7 | 0.00 | 0.00 | 0.00 |
| 2,200.0 | 10.14 | 39.24 | 2,182.0 | 172.2 | 140.6 | 222.3 | 0.00 | 0.00 | 0.00 |
| 2,300.0 | 10.14 | 39.24 | 2,280.5 | 185.8 | 151.8 | 239.9 | 0.00 | 0.00 | 0.00 |
| 2,400.0 | 10.14 | 39.24 | 2,378.9 | 199.4 | 162.9 | 257.5 | 0.00 | 0.00 | 0.00 |
| 2,500.0 | 10.14 | 39.24 | 2,477.4 | 213.1 | 174.0 | 275.1 | 0.00 | 0.00 | 0.00 |
| 2,600.0 | 10.14 | 39.24 | 2,575.8 | 226.7 | 185.2 | 292.7 | 0.00 | 0.00 | 0.00 |
| 2,700.0 | 10.14 | 39.24 | 2,674.2 | 240.4 | 196.3 | 310.3 | 0.00 | 0.00 | 0.00 |
| 2,800.0 | 10.14 | 39.24 | 2,772.7 | 254.0 | 207.4 | 327.9 | 0.00 | 0.00 | 0.00 |
| 2,900.0 | 10.14 | 39.24 | 2,871.1 | 267.6 | 218.6 | 345.5 | 0.00 | 0.00 | 0.00 |
| 3,000.0 | 10.14 | 39.24 | 2,969.6 | 281.3 | 229.7 | 363.1 | 0.00 | 0.00 | 0.00 |
| 3,100.0 | 10.14 | 39.24 | 3,068.0 | 294.9 | 240.8 | 380.7 | 0.00 | 0.00 | 0.00 |
| 3,200.0 | 10.14 | 39.24 | 3,166.4 | 308.5 | 252.0 | 398.3 | 0.00 | 0.00 | 0.00 |
| 3,300.0 | 10.14 | 39.24 | 3,264.9 | 322.2 | 263.1 | 415.9 | 0.00 | 0.00 | 0.00 |
| 3,400.0 | 10.14 | 39.24 | 3,363.3 | 335.8 | 274.3 | 433.5 | 0.00 | 0.00 | 0.00 |
| 3,500.0 | 10.14 | 39.24 | 3,461.7 | 349.4 | 285.4 | 451.2 | 0.00 | 0.00 | 0.00 |
| 3,600.0 | 10.14 | 39.24 | 3,560.2 | 363.1 | 296.5 | 468.8 | 0.00 | 0.00 | 0.00 |
| 3,700.0 | 10.14 | 39.24 | 3,658.6 | 376.7 | 307.7 | 486.4 | 0.00 | 0.00 | 0.00 |
| 3,800.0 | 10.14 | 39.24 | 3,757.1 | 390.3 | 318.8 | 504.0 | 0.00 | 0.00 | 0.00 |
| 3,900.0 | 10.14 | 39.24 | 3,855.5 | 404.0 | 329.9 | 521.6 | 0.00 | 0.00 | 0.00 |
| 4,000.0 | 10.14 | 39.24 | 3,953.9 | 417.6 | 341.1 | 539.2 | 0.00 | 0.00 | 0.00 |
| 4,100.0 | 10.14 | 39.24 | 4,052.4 | 431.2 | 352.2 | 556.8 | 0.00 | 0.00 | 0.00 |
| 4,200.0 | 10.14 | 39.24 | 4,150.8 | 444.9 | 363.3 | 574.4 | 0.00 | 0.00 | 0.00 |
| 4,300.0 | 10.14 | 39.24 | 4,249.3 | 458.5 | 374.5 | 592.0 | 0.00 | 0.00 | 0.00 |
| 4,400.0 | 10.14 | 39.24 | 4,347.7 | 472.1 | 385.6 | 609.6 | 0.00 | 0.00 | 0.00 |
| 4,500.0 | 10.14 | 39.24 | 4,446.1 | 485.8 | 396.7 | 627.2 | 0.00 | 0.00 | 0.00 |
| 4,600.0 | 10.14 | 39.24 | 4,544.6 | 499.4 | 407.9 | 644.8 | 0.00 | 0.00 | 0.00 |
| 4,700.0 | 10.14 | 39.24 | 4,643.0 | 513.0 | 419.0 | 662.4 | 0.00 | 0.00 | 0.00 |
| 4,800.0 | 10.14 | 39.24 | 4,741.4 | 526.7 | 430.1 | 680.0 | 0.00 | 0.00 | 0.00 |
| 4,900.0 | 10.14 | 39.24 | 4,839.9 | 540.3 | 441.3 | 697.6 | 0.00 | 0.00 | 0.00 |
| 5,000.0 | 10.14 | 39.24 | 4,938.3 | 553.9 | 452.4 | 715.2 | 0.00 | 0.00 | 0.00 |
| 5,100.0 | 10.14 | 39.24 | 5,036.8 | 567.6 | 463.5 | 732.8 | 0.00 | 0.00 | 0.00 |
| 5,200.0 | 10.14 | 39.24 | 5,135.2 | 581.2 | 474.7 | 750.4 | 0.00 | 0.00 | 0.00 |

NEWFIELD



PayZone Directional Services, LLC.

Planning Report



Database: EDM 2003.21 Single User Db
Company: NEWFIELD EXPLORATION
Project: USGS Myton SW (UT)
Site: SECTION 23 T8S, R17E
Well: N-23-8-17
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well N-23-8-17
TVD Reference: N-23-8-17 @ 5121.0ft (Original Well Elev)
MD Reference: N-23-8-17 @ 5121.0ft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
|----------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| 5,300.0 | 10.14 | 39.24 | 5,233.6 | 594.8 | 485.8 | 768.0 | 0.00 | 0.00 | 0.00 |
| 5,400.0 | 10.14 | 39.24 | 5,332.1 | 608.5 | 497.0 | 785.6 | 0.00 | 0.00 | 0.00 |
| 5,500.0 | 10.14 | 39.24 | 5,430.5 | 622.1 | 508.1 | 803.2 | 0.00 | 0.00 | 0.00 |
| 5,600.0 | 10.14 | 39.24 | 5,529.0 | 635.7 | 519.2 | 820.8 | 0.00 | 0.00 | 0.00 |
| 5,700.0 | 10.14 | 39.24 | 5,627.4 | 649.4 | 530.4 | 838.4 | 0.00 | 0.00 | 0.00 |
| 5,723.0 | 10.14 | 39.24 | 5,650.0 | 652.5 | 532.9 | 842.5 | 0.00 | 0.00 | 0.00 |
| N-23-8-17 TGT | | | | | | | | | |
| 5,800.0 | 10.14 | 39.24 | 5,725.8 | 663.0 | 541.5 | 856.0 | 0.00 | 0.00 | 0.00 |
| 5,900.0 | 10.14 | 39.24 | 5,824.3 | 676.6 | 552.6 | 873.6 | 0.00 | 0.00 | 0.00 |
| 6,000.0 | 10.14 | 39.24 | 5,922.7 | 690.3 | 563.8 | 891.2 | 0.00 | 0.00 | 0.00 |
| 6,100.0 | 10.14 | 39.24 | 6,021.1 | 703.9 | 574.9 | 908.8 | 0.00 | 0.00 | 0.00 |
| 6,200.0 | 10.14 | 39.24 | 6,119.6 | 717.5 | 586.0 | 926.4 | 0.00 | 0.00 | 0.00 |
| 6,300.0 | 10.14 | 39.24 | 6,218.0 | 731.2 | 597.2 | 944.0 | 0.00 | 0.00 | 0.00 |
| 6,400.0 | 10.14 | 39.24 | 6,316.5 | 744.8 | 608.3 | 961.6 | 0.00 | 0.00 | 0.00 |
| 6,500.0 | 10.14 | 39.24 | 6,414.9 | 758.4 | 619.4 | 979.2 | 0.00 | 0.00 | 0.00 |
| 6,600.0 | 10.14 | 39.24 | 6,513.3 | 772.1 | 630.6 | 996.8 | 0.00 | 0.00 | 0.00 |
| 6,688.0 | 10.14 | 39.24 | 6,600.0 | 784.1 | 640.4 | 1,012.3 | 0.00 | 0.00 | 0.00 |

Targets

| Target Name | Dip Angle (°) | Dip Dir. (°) | TVD (ft) | +N/-S (ft) | +E/-W (ft) | Northing (ft) | Easting (ft) | Latitude | Longitude |
|------------------------|---------------|--------------|----------|------------|------------|---------------|--------------|-----------------|-------------------|
| - hit/miss target | | | | | | | | | |
| - Shape | | | | | | | | | |
| N-23-8-17 TGT | 0.00 | 0.00 | 5,650.0 | 652.5 | 532.9 | 7,209,908.32 | 2,065,942.51 | 40° 6' 11.268 N | 109° 58' 43.131 W |
| - plan hits target | | | | | | | | | |
| - Circle (radius 75.0) | | | | | | | | | |





Project: USGS Myton SW (UT)
 Site: SECTION 23 T8S, R17E
 Well: N-23-8-17
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.38°

Magnetic Field
 Strength: 52384.7snT
 Dip Angle: 65.88°
 Date: 2010/10/04
 Model: IGRF2010

KOP @ 600'
 DOGLEG RATE 1.5 DEG/100'
 TARGET RADIUS IS 75'

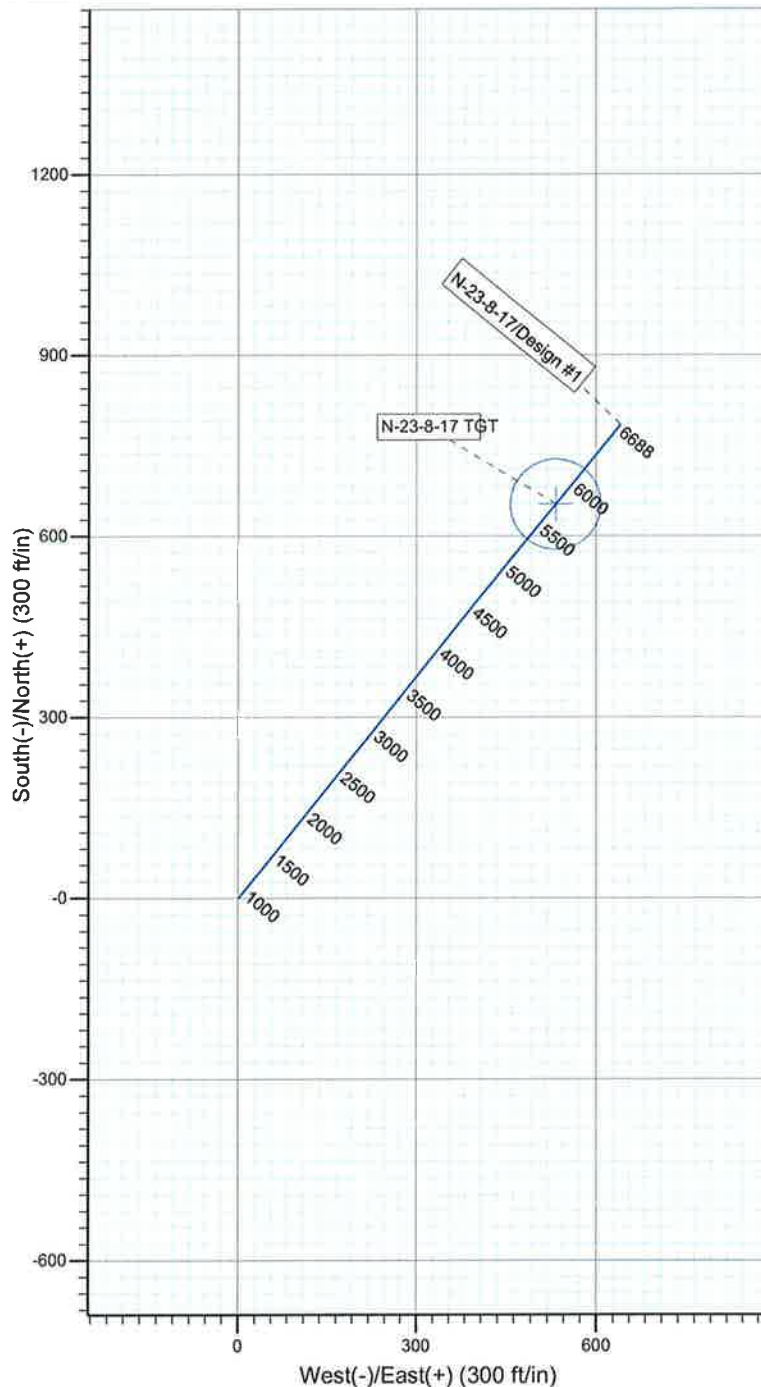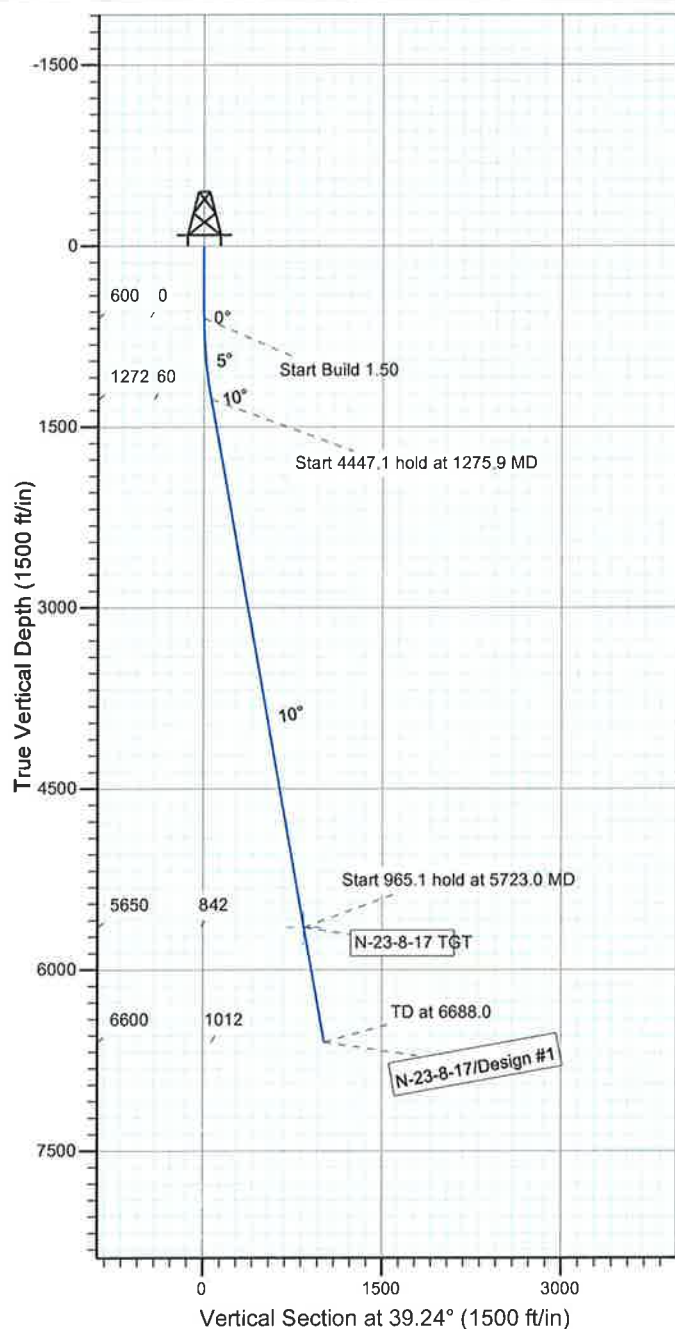

WELLBORE TARGET DETAILS

| Name | TVD | +N/-S | +E/-W | Shape |
|---------------|--------|-------|-------|-----------------------|
| N-23-8-17 TGT | 5650.0 | 652.5 | 532.9 | Circle (Radius: 75.0) |

SECTION DETAILS

| Sec | MD | Inc | Azi | TVD | +N/-S | +E/-W | DLeg | TFace | VSec | Target |
|-----|--------|-------|-------|--------|-------|-------|------|-------|--------|---------------|
| 1 | 0.0 | 0.00 | 0.00 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.0 | |
| 2 | 600.0 | 0.00 | 0.00 | 600.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.0 | |
| 3 | 1275.9 | 10.14 | 39.24 | 1272.4 | 46.2 | 37.7 | 1.50 | 39.24 | 59.6 | |
| 4 | 5723.0 | 10.14 | 39.24 | 5650.0 | 652.5 | 532.9 | 0.00 | 0.00 | 842.5 | N-23-8-17 TGT |
| 5 | 6688.0 | 10.14 | 39.24 | 6600.0 | 784.1 | 640.4 | 0.00 | 0.00 | 1012.3 | |



**NEWFIELD PRODUCTION COMPANY
GREATER MONUMENT BUTTE N-23-8-17
AT SURFACE: NW/SW SECTION 23, T8S, R17E
DUCHESNE COUNTY, UTAH**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site Greater Monument Butte N-23-8-17 located in the NW 1/4 SW 1/4 Section 23, T8S, R17E, Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 – 1.4 miles \pm to the junction of this highway and UT State Hwy 53; proceed southeasterly – 6.8 miles \pm to it's junction with an existing road to the east; proceed easterly - 3.0 miles \pm to it's junction with an existing road to the northeast; proceed northeasterly - 0.3 miles \pm to it's junction with an existing road to the southeast; proceed in a southeasterly direction - 1.2 miles \pm to it's junction with an existing road to the south; proceed in a southerly direction - 0.1 miles \pm to the existing 12-23-8-17 well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

There is no proposed access road for this location. The proposed well will be drilled directionaly off of the existing 12-23-8-17 well pad. See attached **Topographic Map "B"**.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District
Water Right : 43-10136

Maurice Harvey Pond
Water Right: 47-1358

Neil Moon Pond
Water Right: 43-11787

Newfield Collector Well
Water Right: 41-1817 (A30414DVA, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

8. **ANCILLARY FACILITIES**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT**

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP** – Bureau of Land Management.

12. **OTHER ADDITIONAL INFORMATION**

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. MOAC Report #02-63, 6/10/02. Paleontological Resource Survey prepared by, Wade E. Miller, 5/4/02. See attached report cover pages, Exhibit "D".

Newfield Production Company requests 523' of buried water line to be granted in Lease UTU-76239.

It is proposed that the disturbed area will be 60' wide to allow for construction of the proposed access road, a 10" or smaller gas gathering line, a 4" poly fuel gas line, a buried 10" steel water injection line, a buried 3" poly water return line, and a and a 14" surface flow line. The planned access road will consist of a 20' permanent running surface (10' either side of the centerline) crowned and ditched in order to handle any run-off from any precipitation events that are prevalent to this area. The maximum grade will be less than 8%. There will be no culverts required along this access road. There will be turnouts as needed along this road to allow for increases in potential traffic issues. There are no fences encountered along this proposed road. There will be no new gates or cattle guards required. All construction material for this access road will be borrowed material accumulated during construction of the access road.

Both the proposed surface gas and buried water lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."** The proposed water pipelines will be buried in a 4-5' deep trench constructed with a trencher or backhoe for the length of the proposal. The equipment will run on the surface and not be flat bladed to minimize surface impacts to precious topsoil in these High Desert environments. If possible, all proposed surface gas pipelines will be installed on the same side of the road as existing gas lines. The construction phase of the planned access road, proposed gas lines and proposed water lines will last approximately (5) days.

In the event that the proposed well is converted to a water injection well, a Sundry Notice 3160-5 form will be applied for through the Bureau of Land Management field office.

For a ROW plan of development, please refer to the Greater Monument Butte Green River Development SOP and as well as the Castle Peak and Eight Mile Flat Reclamation and Weed Management Plan.

Surface Flow Line

Newfield requests 522' of surface flow line be granted. The Surface Flow Line will consist of up to a 14" bundled pipe consisting of 2-2" poly glycol lines and 1-3" production line. For all new wells, Newfield. **Refer to Topographic Map "D"** for the proposed location of the proposed flow line. Flow lines will be tan and will be constructed using the following procedures:

Clearing and Grading: No clearing or grading of the ROW will be required. The centerline of the proposed route will be staked prior to installation. Flow lines shall be placed as close to existing roads as possible without interfering with normal road travel or road maintenance activities. Due to the proximity of existing facilities, no temporary use or construction/storage areas are anticipated. If necessary, temporary use or construction/storage areas will be identified on a topographic map included in the approved permit.

Installation: The proposed flow lines will be installed 4-6" above the ground. For portions along existing two-track and primary access roads, lengths of pipe will be strung out in the borrow ditch, welded together, and rolled or dragged into place with heavy equipment. For pipelines that are installed cross-country (not along existing or proposed roads), travel along the lines will be infrequent and for maintenance needs only. No installation activities will be performed during periods when the soil is too wet to adequately support installation equipment. If such equipment creates ruts in excess of three (3) inches deep, the soil will be deemed too wet to adequately support the equipment.

Termination and Final Reclamation: After abandonment of the associated production facilities, the flow lines will be cut and removed, and any incidental surface disturbance reclaimed. Reclamation procedures will follow those outlined in the Castle Peak and Eight Mile Flat Reclamation and Weed Management Plan.

Water Disposal

After first production, if the production water meets quality guidelines, it will be transported to the Ashley, Monument Butte, Jonah, South Wells Draw and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project. Water not meeting quality criteria, will be disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), Federally approved surface disposal facilities or at a State of Utah approved surface disposal facilities.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Details of the On-Site Inspection

The proposed Greater Monument Butte N-23-8-17 was on-sited on 11/9/10. The following were present; Tim Eaton (Newfield Production), Christine Cimiluca (Bureau of Land Management), Suzanne Grayson (Bureau of Land Management), and Janna Simonsen (Bureau of Land Management). Weather conditions were clear and ground cover was 100% open.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the Greater Monument Butte N-23-8-17, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the Greater Monument Butte N-23-8-17, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

13. LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:

Representative

Name: Tim Eaton

Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052

Telephone: (435) 646-3721

Certification

Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #N-23-8-17, Section 23, Township 8S, Range 17E: Lease UTU-76239 Duchesne County, Utah: and is

responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #WYB000493.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

12/8/10
Date


Mandie Crozier
Regulatory Specialist
Newfield Production Company

2-M SYSTEM

Blowout Prevention Equipment Systems

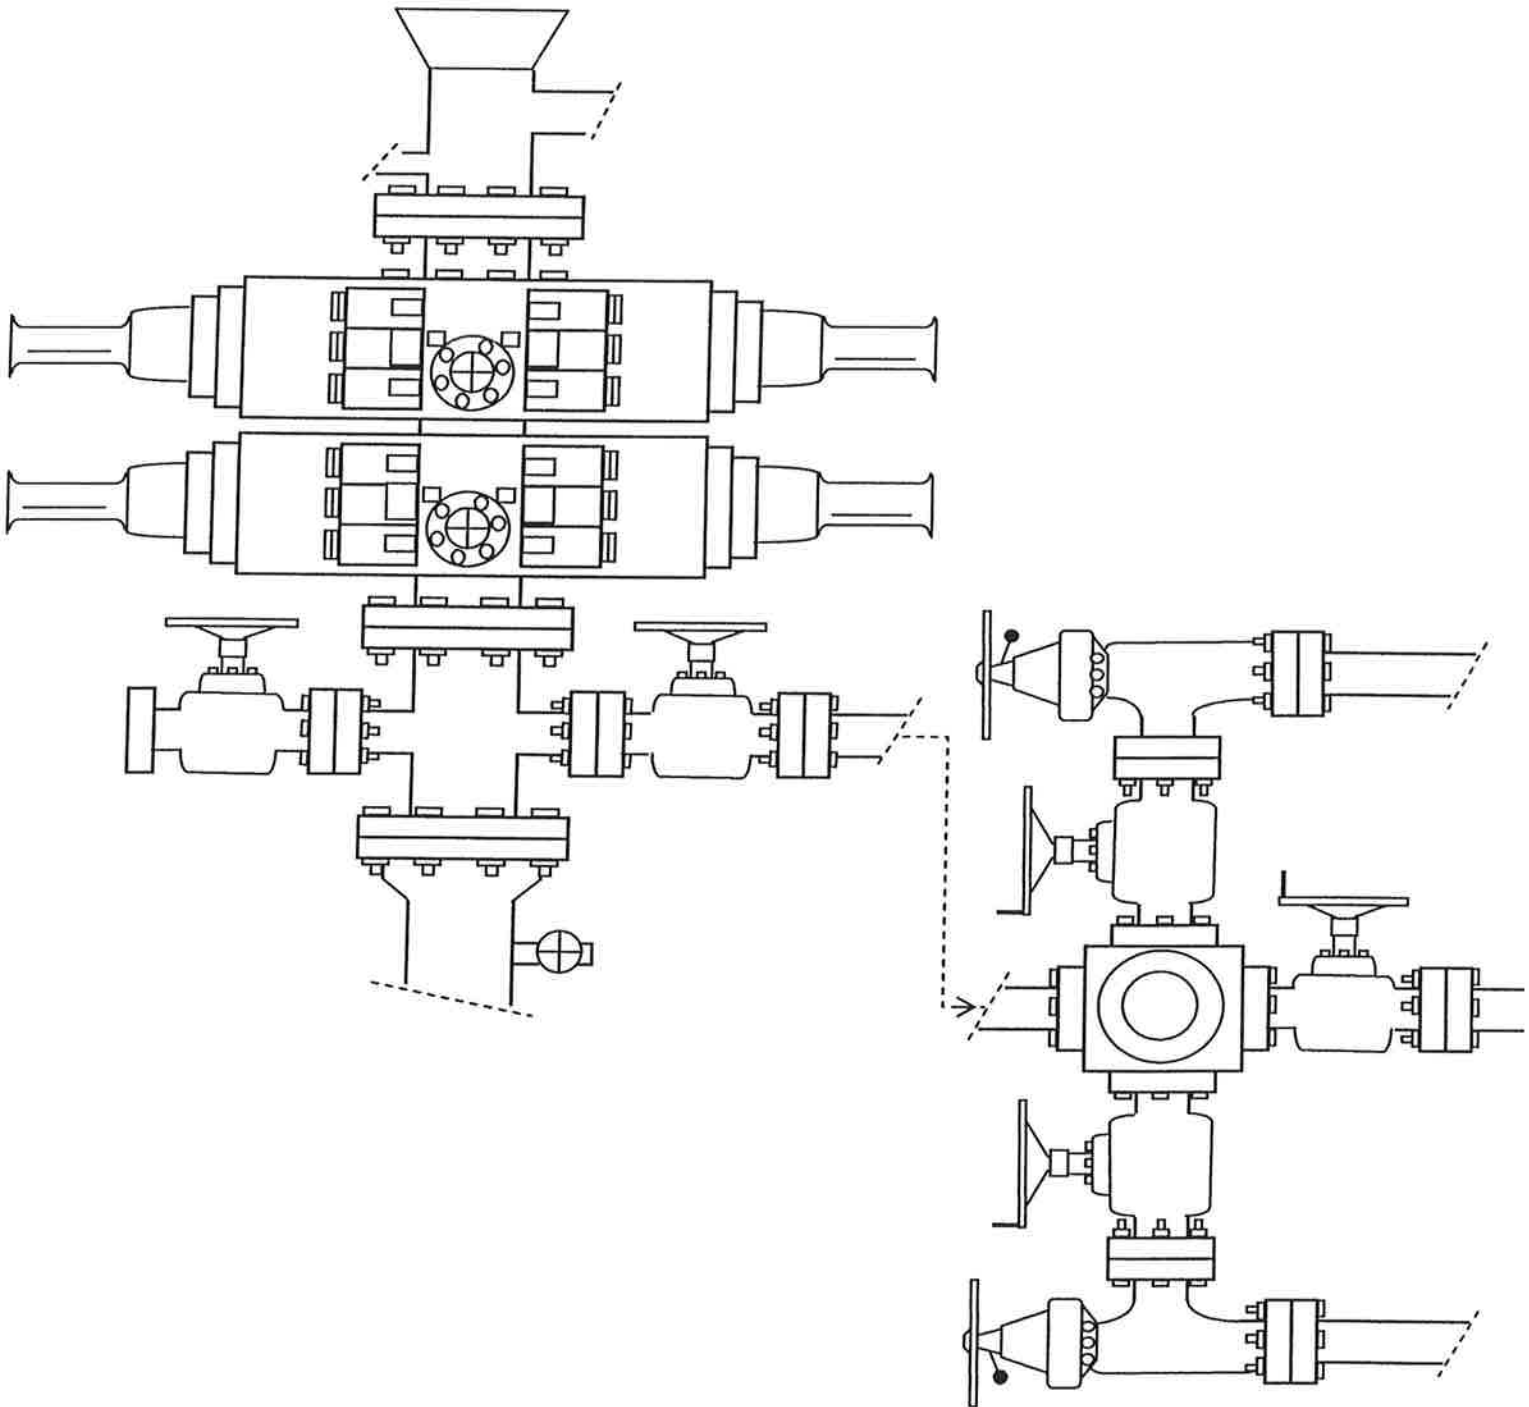


EXHIBIT C

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office

P.O. Box 45155

Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:

3160

(UT-922)

December 9, 2010

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2010 Plan of Development Greater Monument
Butte Unit, Duchesne and Uintah Counties,
Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2010 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

| API# | WELL NAME | LOCATION |
|---------------------------|----------------|--|
| (Proposed PZ GREEN RIVER) | | |
| 43-013-50528 | GMBU M-23-8-17 | Sec 23 T08S R17E 1995 FSL 1996 FWL BHL Sec 23 T08S R17E 2236 FNL 2273 FEL |
| 43-013-50529 | GMBU R-23-8-17 | Sec 23 T08S R17E 1975 FSL 1991 FWL BHL Sec 23 T08S R17E 1164 FSL 2506 FEL |
| 43-013-50530 | GMBU N-23-8-17 | Sec 23 T08S R17E 1874 FSL 0723 FWL BHL Sec 23 T08S R17E 2606 FNL 1374 FWL |
| 43-013-50531 | GMBU Q-23-8-17 | Sec 23 T08S R17E 1863 FSL 0704 FWL BHL Sec 23 T08S R17E 1014 FSL 1464 FWL |
| 43-047-51399 | GMBU H-24-8-17 | Sec 24 T08S R17E 1217 FNL 1933 FWL BHL Sec 24 T08S R17E 0260 FNL 2541 FEL |
| 43-047-51400 | GMBU M-24-8-17 | Sec 24 T08S R17E 1226 FNL 1912 FWL BHL Sec 24 T08S R17E 2497 FSL 2363 FEL |
| 43-047-51401 | GMBU B-25-8-17 | Sec 24 T08S R17E 0643 FSL 0674 FEL BHL Sec 25 T08S R17E 0334 FNL 1483 FEL |
| 43-013-50532 | GMBU Q-30-8-17 | Sec 30 T08S R17E 1978 FSL 1911 FWL BHL Sec 30 T08S R17E 1245 FSL 1200 FWL |

| API# | WELL NAME | LOCATION |
|---------------------------|----------------|--|
| (Proposed PZ GREEN RIVER) | | |
| 43-013-50533 | GMBU R-30-8-17 | Sec 30 T08S R17E 1996 FSL 1923 FWL BHL Sec 30 T08S R17E 1239 FSL 2393 FEL |
| 43-013-50534 | GMBU I-1-9-16 | Sec 01 T09S R16E 2136 FNL 1969 FEL BHL Sec 01 T09S R16E 1162 FNL 1294 FEL |
| 43-013-50535 | GMBU K-1-9-16 | Sec 06 T09S R17E 1988 FNL 0583 FWL BHL Sec 01 T09S R16E 2387 FSL 0291 FEL |
| 43-013-50536 | GMBU L-1-9-16 | Sec 01 T09S R16E 1973 FSL 1961 FEL BHL Sec 01 T09S R16E 2458 FNL 1122 FEL |
| 43-013-50537 | GMBU S-1-9-16 | Sec 01 T09S R16E 1964 FSL 1942 FEL BHL Sec 01 T09S R16E 0999 FSL 1028 FEL |
| 43-013-50538 | GMBU S-10-9-16 | Sec 10 T09S R16E 0598 FSL 1959 FEL BHL Sec 10 T09S R16E 1450 FSL 1170 FEL |
| 43-013-50539 | GMBU R-10-9-16 | Sec 10 T09S R16E 0644 FSL 2017 FWL BHL Sec 10 T09S R16E 1417 FSL 2500 FEL |
| 43-013-50540 | GMBU C-15-9-16 | Sec 10 T09S R16E 0624 FSL 2022 FWL BHL Sec 15 T09S R16E 0200 FNL 2508 FEL |

This office has no objection to permitting the wells at this time.

Michael L. Coulthard

Digitally signed by Michael L. Coulthard
DN: cn=Michael L. Coulthard, o=Bureau of Land Management, ou=Branch of Minerals,
email=Michael_Coulthard@blm.gov, c=US
Date: 2010.12.09 11:11:06 -0700

bcc: File - Greater Monument Butte Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:12-9-10



VIA ELECTRONIC DELIVERY

December 10, 2010

State of Utah, Division of Oil, Gas and Mining
ATTN: Diana Mason
P.O. Box 145801
Salt Lake City, UT 84114-5801

RE: Directional Drilling
Greater Monument Butte N-23-8-17
Greater Monument Butte (Green River) Unit

Surface Hole: T8S-R17E Section 23: NWSW (UTU-76239)
1874' FSL 723' FWL

At Target: T8S-R17E Section 23: SENW (UTU-76239)
2606' FNL 1374' FWL

Duchesne County, Utah

Dear Ms. Mason;

Pursuant to the filing by Newfield Production Company (NPC) of an Application for Permit to Drill the above referenced well dated 12/8/10, a copy of which is attached, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole and target locations of this well are both within the boundaries of the Greater Monument Butte Unit (UTU-87538X), of which Newfield certifies that it is the operator. Further, Newfield certifies that all lands within 460 feet of the entire directional well bore are within the Greater Monument Butte Unit.

NPC is permitting this well as a directional well in order to mitigate surface disturbance by utilizing pre-existing roads and pipelines.

NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please contact the undersigned at 303-383-4197 or by email at sgillespie@newfield.com. Your consideration in this matter is greatly appreciated.

Sincerely,
Newfield Production Company

A handwritten signature in blue ink, appearing to read "Shane Gillespie".

Shane Gillespie
Land Associate

Form 3160-3
(August 2007)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER


FORM APPROVED
OMB No. 1004-0137
Expires July 31, 2010

| | |
|--|--|
| 5. Lease Serial No. UTU-76239 | |
| 6. If Indian, Allottee or Tribe Name NA | |
| 7. If Unit or CA Agreement, Name and No. Greater Monument Butte | |
| 8. Lease Name and Well No. Greater Monument Butte N-23-8-17 | |
| 9. API Well No. | |
| 1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER | 10. Field and Pool, or Exploratory Monument Butte |
| 1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone | 11. Sec., T. R. M. or Blk. and Survey or Area Sec. 23, T8S R17E |
| 2. Name of Operator Newfield Production Company | 12. County or Parish Duchesne |
| 3a. Address Route #3 Box 3630, Myton UT 84052 | 13. State UT |
| 3b. Phone No. (include area code) (435) 646-3721 | |
| 4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface NW/SW 1874' FSL 723' FWL Sec. 23, T8S R17E (UTU-76239) At proposed prod. zone SE/NW 2606' FNL 1374' FWL Sec. 23, T8S R17E (UTU-76239) | |
| 14. Distance in miles and direction from nearest town or post office* Approximately 12.8 miles southeast of Myton, UT | |
| 15. Distance from proposed* location to nearest property or lease line, ft. Approx. 1374' f/lse, NA' f/unit (Also to nearest drig. unit line, if any) | 16. No. of acres in lease 473.84 |
| 17. Spacing Unit dedicated to this well 20 Acres | |
| 18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1,714' | 19. Proposed Depth 6,688' |
| 20. BLM/BIA Bond No. on file WYB000493 | |
| 21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5109' GL | 22. Approximate date work will start* 12 Oct 2011 |
| 23. Estimated duration (7) days from SPUD to rig release | |

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, must be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM. |

| | | |
|--|--|-----------------|
| 25. Signature  | Name (Printed Typed) Mandie Crozier | Date 12/8/10 |
| Title Regulatory Specialist | | |
| Approved by (Signature) | Name (Printed Typed) | Date |
| Title | Office | |

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)


*(Instructions on page 2)

T8S, R17E, S.L.B.&M.

NEWFIELD EXPLORATION COMPANY

WELL LOCATION, N-23-8-17, LOCATED AS SHOWN IN THE NW 1/4 SW 1/4 OF SECTION 23, T8S, R17E, S.L.B.&M. DUCHESNE COUNTY, UTAH.

TARGET BOTTOM HOLE, N-23-8-17, LOCATED AS SHOWN IN THE SE 1/4 NW 1/4 OF SECTION 23, T8S, R17E, S.L.B.&M. DUCHESNE COUNTY, UTAH.

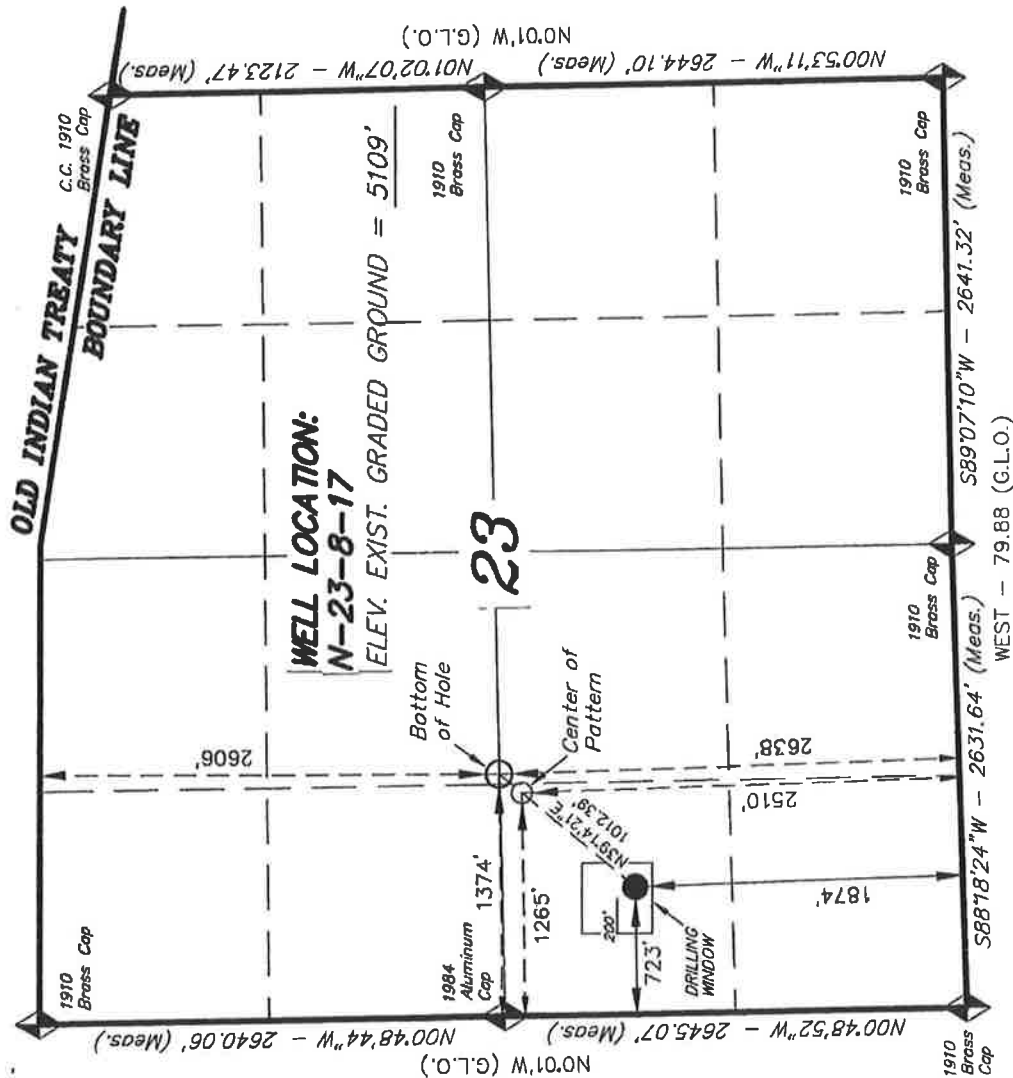

- NOTES:**
1. Well footages are measured at right angles to the Section Lines.
 2. Bearings are based on Global Positioning Satellite observations.

THIS IS TO CERTIFY THAT THE ABOVE PART WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

STACY W. STACY
REGISTERED LAND SURVEYOR
REGISTRATION NO. 18893
STATE OF UTAH

TRI STATE LAND SURVEYING & CONSULTING
180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501


| | |
|----------------------------|-------------------|
| DATE SURVEYED: 08-18-10 | SURVEYED BY: S.V. |
| DATE DRAWN: 10-05-10 | DRAWN BY: M.W. |
| REVISED: | SCALE: 1" = 1000' |

N-23-8-17
(Surface Location) NAD 83
LATITUDE = 40° 06' 04.82"
LONGITUDE = 109° 58' 49.99"

SECTION CORNERS LOCATED

BASIS OF ELEV; Elevations are base on LOCATION: an N.G.S. OPUS Correction.
LAT. 40°04'09.56" LONG. 110°00'43.28"
(Tristate Aluminum Cap) Elev. 5281.57'

Access Road Map

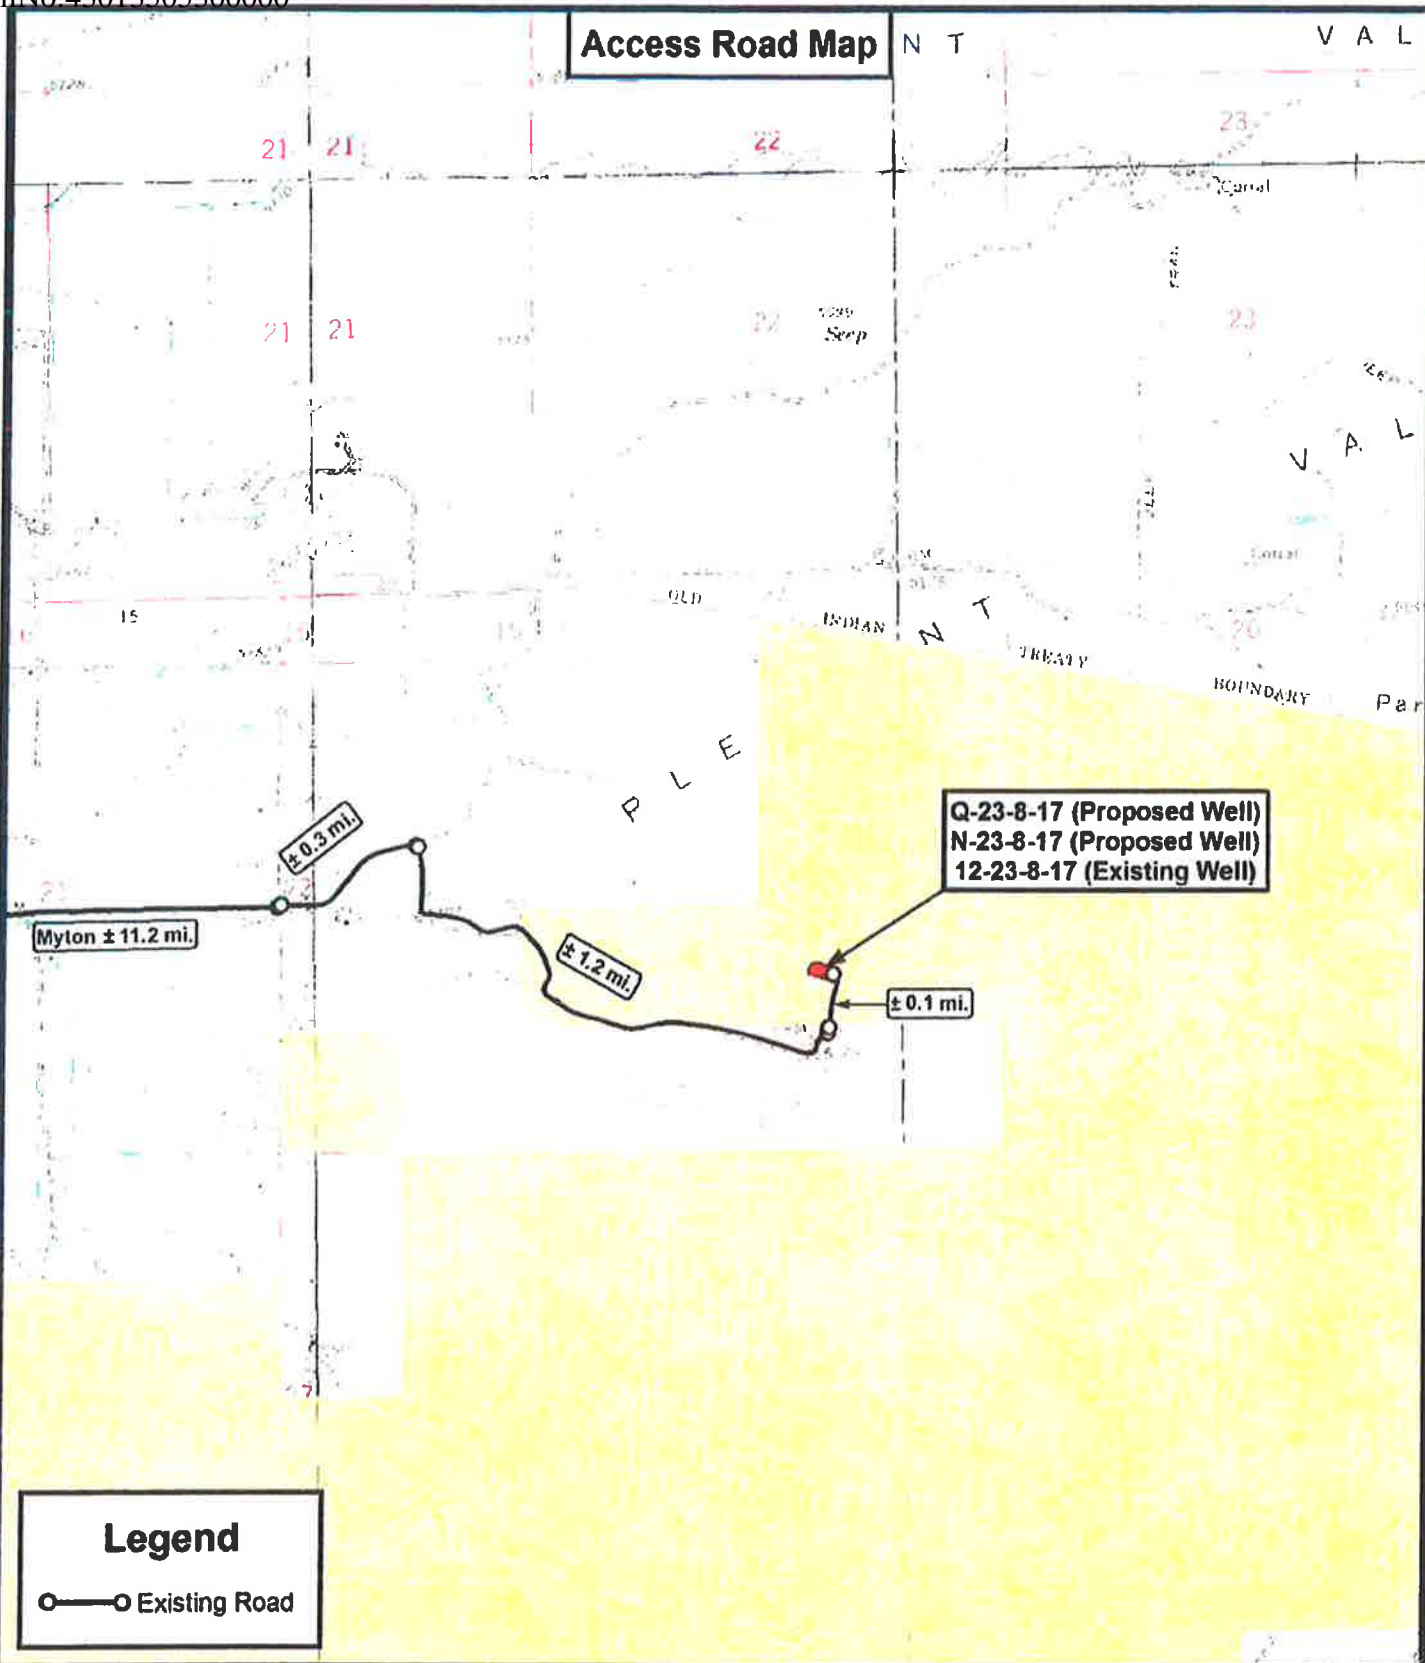

Legend

—○— Existing Road



**Tri State
Land Surveying, Inc.**

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2618



NEWFIELD EXPLORATION COMPANY

Q-23-8-17 (Proposed Well)
N-23-8-17 (Proposed Well)
12-23-8-17 (Existing Well)

SEC. 23, T8S, R17E, S.L.B.&M. Duchesne County, UT.



DRAWN BY: C.H.M.
DATE: 09-17-2010
SCALE: 1" = 2,000'

TOPOGRAPHIC MAP

SHEET
B

API Number: 4301350530
Well Name: Greater Monument Butte N-23-8-17
Township 08.0 S Range 17.0 E Section 23
Meridian: SLBM
Operator: NEWFIELD PRODUCTION COMPAN

Map Prepared:
Map Produced by Diana Mason

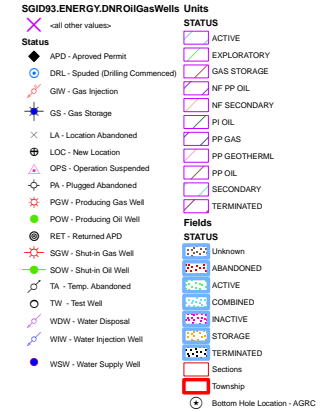

WORKSHEET

APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 12/8/2010

API NO. ASSIGNED: 43013505300000

WELL NAME: Greater Monument Butte N-23-8-17

OPERATOR: NEWFIELD PRODUCTION COMPANY (N2695)

PHONE NUMBER: 435 646-4825

CONTACT: Mandie Crozier

PROPOSED LOCATION: NWSW 23 080S 170E

Permit Tech Review: ☒

SURFACE: 1874 FSL 0723 FWL

Engineering Review: ☐

BOTTOM: 2606 FNL 1374 FWL

Geology Review: ☒

COUNTY: DUCHESNE

LATITUDE: 40.10133

LONGITUDE: -109.97982

UTM SURF EASTINGS: 586957.00

NORTHINGS: 4439293.00

FIELD NAME: MONUMENT BUTTE

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-76239

PROPOSED PRODUCING FORMATION(S): GREEN RIVER

SURFACE OWNER: 1 - Federal

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

☒ **PLAT**

☒ **Bond:** FEDERAL - WYB000493

☐ **Potash**

☐ **Oil Shale 190-5**

☐ **Oil Shale 190-3**

☐ **Oil Shale 190-13**

☒ **Water Permit:** 437478

☐ **RDCC Review:**

☐ **Fee Surface Agreement**

☐ **Intent to Commingle**

Commingle Approved

LOCATION AND SITING:

☐ **R649-2-3.**

Unit: GMBU (GRRV)

☐ **R649-3-2. General**

☐ **R649-3-3. Exception**

☒ **Drilling Unit**

Board Cause No: Cause 213-11

Effective Date: 11/30/2009

Siting: Suspends General Siting

☒ **R649-3-11. Directional Drill**

Comments: Presite Completed
IRR SEC:

Stipulations: 4 - Federal Approval - dmason
15 - Directional - dmason
27 - Other - bhill



GARY R. HERBERT
Governor

GREGORY S. BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: Greater Monument Butte N-23-8-17
API Well Number: 43013505300000
Lease Number: UTU-76239
Surface Owner: FEDERAL
Approval Date: 12/14/2010

Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels at 801-538-5284 (please leave a voicemail message if not available)
OR
submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <https://oilgas.ogm.utah.gov>

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

Approved By:

A handwritten signature in black ink, appearing to read "John Rogers", written over a horizontal line.

For John Rogers
Associate Director, Oil & Gas

| | | |
|--|--|--|
| STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING | | FORM 9 |
| SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals. | | 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-76239 |
| 1. TYPE OF WELL Oil Well | | 6. IF INDIAN, ALLOTTEE OR TRIBE NAME: |
| 2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY | | 7. UNIT or CA AGREEMENT NAME: GMBU (GRRV) |
| 3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052 | | 8. WELL NAME and NUMBER: GREATER MON BUTTE N-23-8-17 |
| 4. LOCATION OF WELL FOOTAGES AT SURFACE: 1874 FSL 0723 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWSW Section: 23 Township: 08.0S Range: 17.0E Meridian: S | | 9. API NUMBER: 43013505300000 |
| 9. FIELD and POOL or WILDCAT: MONUMENT BUTTE | | COUNTY: DUCHESNE |
| STATE: UTAH | | |

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

| TYPE OF SUBMISSION | TYPE OF ACTION | | |
|--|---|---|--|
| <input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 12/14/2011 | <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION | <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER | <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: |
| <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: | | | |
| <input type="checkbox"/> SPUD REPORT Date of Spud: | | | |
| <input type="checkbox"/> DRILLING REPORT Report Date: | | | |

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
 Newfield proposes to extend the Application for Permit to Drill this well for one year.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 12/19/2011

By:

| | | |
|--|-------------------------------------|---------------------------------|
| NAME (PLEASE PRINT) Mandie Crozier | PHONE NUMBER 435 646-4825 | TITLE Regulatory Tech |
| SIGNATURE N/A | DATE 12/12/2011 | |



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013505300000

API: 43013505300000

Well Name: GREATER MON BUTTE N-23-8-17

Location: 1874 FSL 0723 FWL QTR NWSW SEC 23 TWP 080S RNG 170E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 12/14/2010

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Mandie Crozier

Date: 12/12/2011

Title: Regulatory Tech **Representing:** NEWFIELD PRODUCTION COMPANY

RECEIVED Dec. 12, 2011

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0137
Expires July 31, 2010

5. Lease Serial No.
UTU-76239

6. If Indian, Allottee or Tribe Name
NA

1a. Type of work: ☒ DRILL ☐ REENTER

1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other ☒ Single Zone ☐ Multiple Zone

2. Name of Operator Newfield Production Company

7. If Unit or CA Agreement, Name and No.
Greater Monument Butte

8. Lease Name and Well No.
Greater Monument Butte N-23-8-17

9. API Well No.
43 013 50530

3a. Address Route #3 Box 3630, Myton UT 84052

3b. Phone No. (include area code)
(435) 646-3721

10. Field and Pool, or Exploratory
Monument Butte

4. Location of Well (Report location clearly and in accordance with any State requirements.)*

At surface NW/SW 1874' FSL 723' FWL Sec. 23, T8S R17E (UTU-76239)

At proposed prod. zone SE/NW 2606' FNL 1374' FWL Sec. 23, T8S R17E (UTU-76239)

11. Sec., T. R. M. or Blk. and Survey or Area
Sec. 23, T8S R17E

14. Distance in miles and direction from nearest town or post office*
Approximately 12.8 miles southeast of Myton, UT

12. County or Parish
Duchesne

13. State
UT

15. Distance from proposed*
location to nearest
property or lease line, ft. Approx. 1374' f/lse, NA' f/unit
(Also to nearest drig. unit line, if any)

16. No. of acres in lease
473.84

17. Spacing Unit dedicated to this well
20 Acres

18. Distance from proposed location*
to nearest well, drilling, completed,
applied for, on this lease, ft. Approx. 1,714'

19. Proposed Depth
6,688'

20. BLM/BIA Bond No. on file
WYB000493

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
5109' GL

22. Approximate date work will start*
1st Qtr. 2011

23. Estimated duration
(7) days from SPUD to rig release

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, must be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the BLM.

25. Signature
Mandie Crozier

Name (Printed/Typed)
Mandie Crozier

Date
12/8/10

Title
Regulatory Specialist

Approved by (Signature)

Jerry Kenczka

Name (Printed/Typed)
Jerry Kenczka

Date
JAN 05 2012

Title
Assistant Field Manager
Lands & Mineral Resources

Office
VERNAL FIELD OFFICE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

UDOGM

RECEIVED

DEC 09 2010

NOS 116XJ0175A

AFMSS# 10-8-2010

RECEIVED

NOTICE OF APPROVAL

VERNAL, UTAH JAN 25 2012

CONDITIONS OF APPROVAL ATTACHED

DIV. OF OIL GAS & MINERAL



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Newfield Production Company
Well No: GMBU N-23-8-17
API No: 43-013-50530

Location: NWSW, Sec. 23, T8S R17E
Lease No: UTU-76239
Agreement: GMBU

OFFICE NUMBER: (435) 781-4400

OFFICE FAX NUMBER: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

| | | |
|---|---|--|
| Location Construction (Notify Environmental Scientist) | - | Forty-Eight (48) hours prior to construction of location and access roads. |
| Location Completion (Notify Environmental Scientist) | - | Prior to moving on the drilling rig. |
| Spud Notice (Notify Petroleum Engineer) | - | Twenty-Four (24) hours prior to spudding the well. |
| Casing String & Cementing (Notify Supv. Petroleum Tech.) | - | Twenty-Four (24) hours prior to running casing and cementing all casing strings to: ut_vn_opreport@blm.gov . |
| BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.) | - | Twenty-Four (24) hours prior to initiating pressure tests. |
| First Production Notice (Notify Petroleum Engineer) | - | Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days. |

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

- All new and replacement internal combustion gas field engines of less than or equal to 300 design-rated horsepower must not emit more than 2 gms of NO_x per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower.
- All and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 gms of NO_x per horsepower-hour.
- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

SITE SPECIFIC COA's

- After cessation of drilling and completion operations, any visible or measurable layer of oil must be removed from the surface of the reserve pit and the pit kept free of oil.
- Pits must be free of oil and other liquid and solid wastes prior to filling. Pit liners must not be breached (cut) or filled (squeezed) while still containing fluids. The pit liner must be removed to the solids level or treated to prevent its reemergence to the surface or its interference with long-term successful revegetation.

Reclamation

- Reclamation will be completed in accordance with the Newfield Exploration Company Castle Peak and Eight Mile Flat Reclamation Plan on file with the Vernal Field Office of the BLM.
- The reclamation seed mix will incorporate low growing grasses, instead of crested wheatgrass, which negatively impacts mountain plover habitat.
- Appropriate erosion control and revegetation measures will be employed. In areas with unstable soils where seeding alone may not adequately control erosion, grading will be used to minimize slopes and water bars will be installed on disturbed slopes. Erosion control efforts will be monitored by Newfield and, if necessary, modifications will be made to control erosion.

Monitoring and Reporting

- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) that designates the proposed site-specific monitoring and reference sites chosen for the location. A description of the proposed sites shall be included, as well as a map showing the locations of the proposed sites.
- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) 3 growing seasons after reclamation efforts have occurred evaluating the status of the reclaimed areas in order to determine whether the BLM standards set forth in the Green River District Reclamation Guidelines have been met (30% or greater basal cover).

**DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

SITE SPECIFIC DOWNHOLE COAs:

- The operator shall comply with all applicable requirements in the SOP (version: "Greater Monument Butte Green River Development Program", June 24, 2008). The operator shall also comply with applicable laws and regulations; with the lease terms, Onshore Oil and Gas Orders, NTL's; and with other orders and instructions of the authorized officer.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB

or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.


OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4.

Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

| | | | | | |
|---|--|--|---|--|--|
| STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING | | FORM 9 | | | |
| SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals. | | 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-76239 | | | |
| 1. TYPE OF WELL Oil Well | | 6. IF INDIAN, ALLOTTEE OR TRIBE NAME: | | | |
| 2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY | | 7. UNIT or CA AGREEMENT NAME: GMBU (GRRV) | | | |
| 3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052 | | 8. WELL NAME and NUMBER: GREATER MON BUTTE N-23-8-17 | | | |
| 4. LOCATION OF WELL FOOTAGES AT SURFACE: 1874 FSL 0723 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWSW Section: 23 Township: 08.0S Range: 17.0E Meridian: S | | 9. API NUMBER: 43013505300000 | | | |
| 9. FIELD and POOL or WILDCAT: MONUMENT BUTTE | | COUNTY: DUCHESNE | | | |
| STATE: UTAH | | | | | |
| 11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA | | | | | |
| TYPE OF SUBMISSION | TYPE OF ACTION | | | | |
| <input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 1/24/2012 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date: | <table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input checked="" type="checkbox"/> OTHER </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100%;" type="text" value="Pipeline Re-Route"/> </td> </tr> </table> | | <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION | <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input checked="" type="checkbox"/> OTHER | <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100%;" type="text" value="Pipeline Re-Route"/> |
| <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION | <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input checked="" type="checkbox"/> OTHER | <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100%;" type="text" value="Pipeline Re-Route"/> | | | |
| 12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. Newfield proposes to amend the route of the proposed Buried Water Line as well as the proposed Surface Flow Line from what was originally submitted. See attached Topo Map C. | | | | | |
| Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY February 02, 2012 | | | | | |
| NAME (PLEASE PRINT) Mandie Crozier | PHONE NUMBER 435 646-4825 | TITLE Regulatory Tech | | | |
| SIGNATURE N/A | DATE 1/24/2012 | | | | |

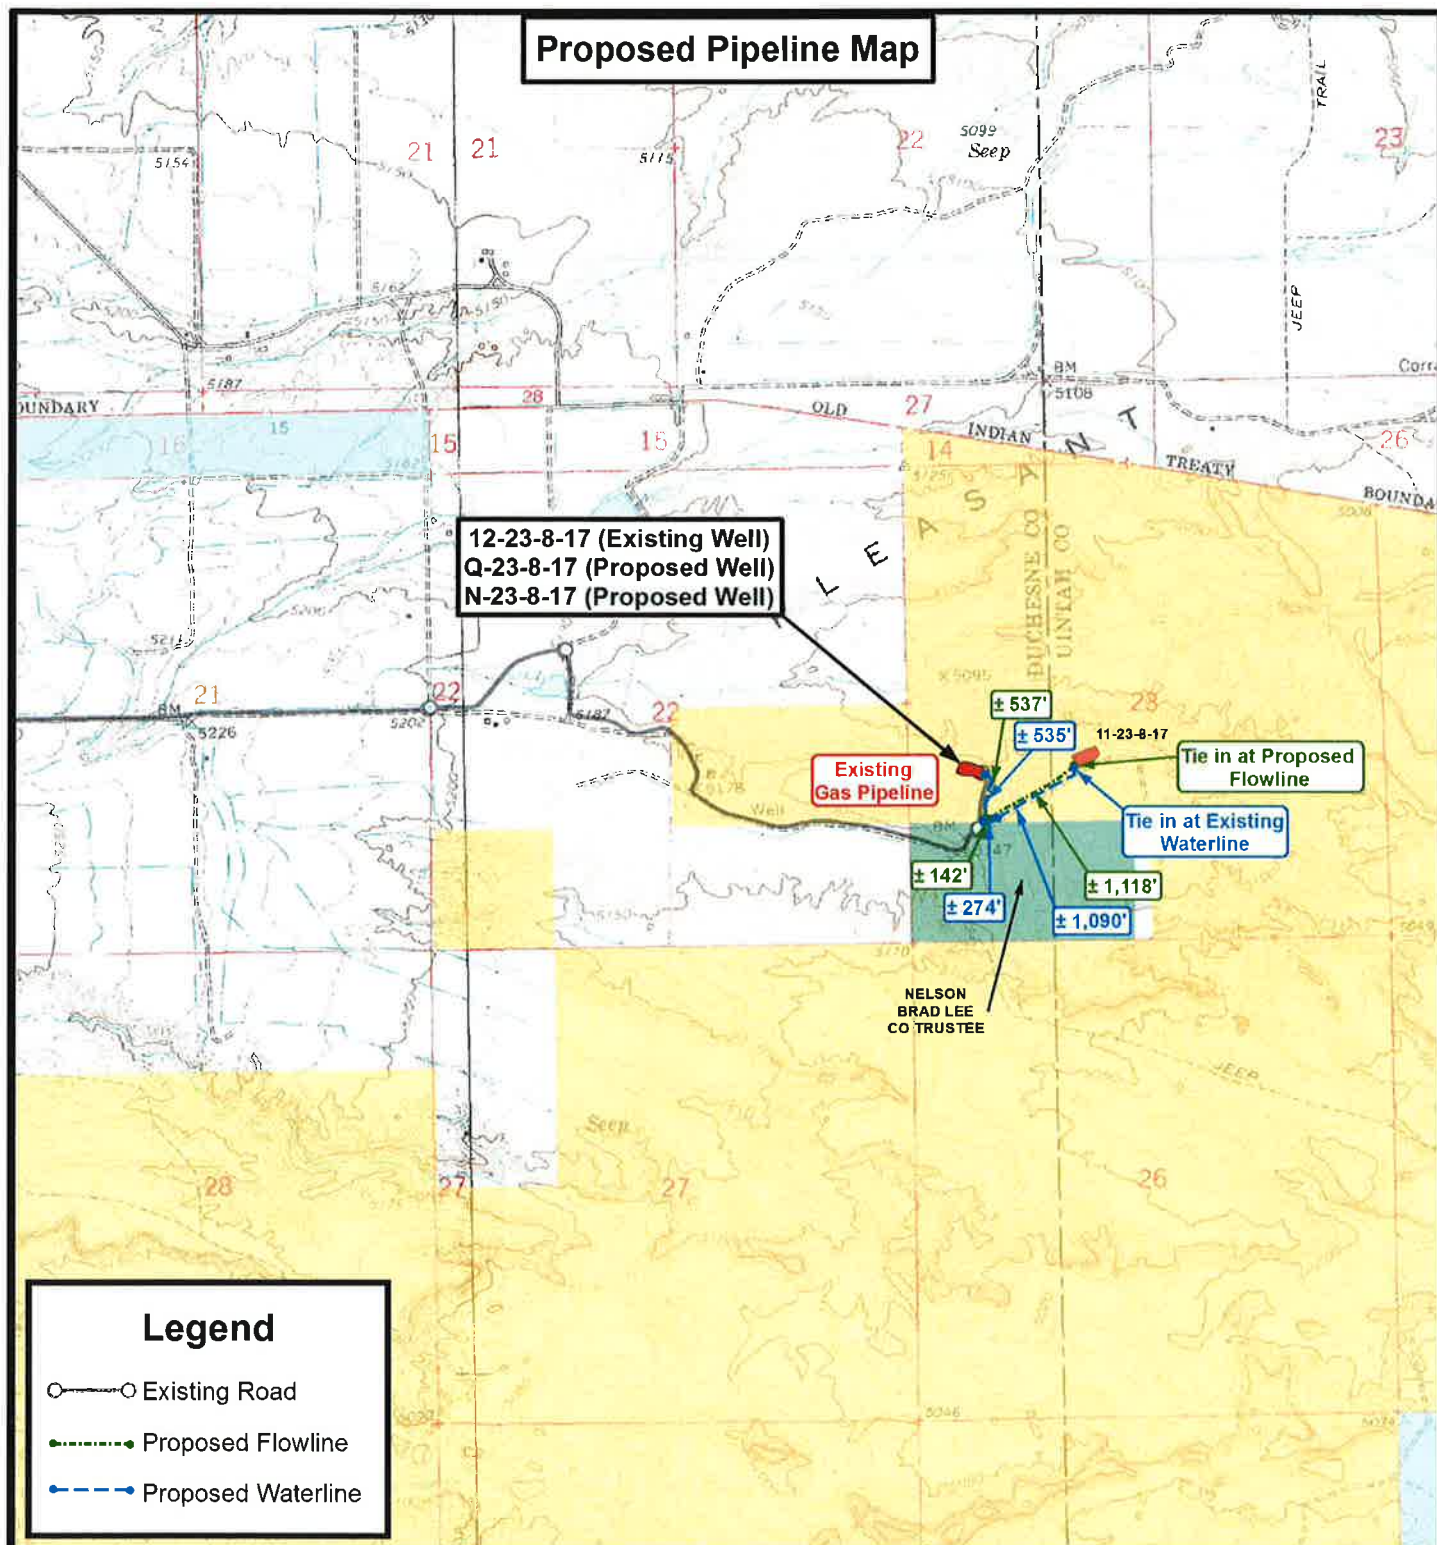

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

12-23-8-17 (Existing Well)
Q-23-8-17 (Proposed Well)
N-23-8-17 (Proposed Well)
SEC. 23, T8S, R17E, S.L.B.&M. Duchesne County, UT.

| | | | | |
|-----------|-------------|----------|-----------------|-----------|
| DRAWN BY: | C.H.M. | REVISED: | 12-27-11 D.C.R. | VERSION: |
| DATE: | 09-17-2010 | | | |
| SCALE: | 1" = 2,000' | | | V3 |

TOPOGRAPHIC MAP

SHEET

C

BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# Ross 29 Submitted By
Brent Peeples Phone Number 435-401-8346
Well Name/Number GMBU N-23-8-17
Qtr/Qtr NW/SW Section 23 Township 8S Range 17E
Lease Serial Number UTU-76239
API Number 43-013-50530

Spud Notice – Spud is the initial spudding of the well, not drilling
out below a casing string.

Date/Time 4/10/2012 3:00 AM ☐ PM ☒

Casing – Please report time casing run starts, not cementing
times.

- ☒ Surface Casing
- ☐ Intermediate Casing
- ☐ Production Casing
- ☐ Liner
- ☐ Other

Date/Time 4/11/2012 11:00 AM ☒ PM ☐

BOPE

- ☐ Initial BOPE test at surface casing point
- ☐ BOPE test at intermediate casing point
- ☐ 30 day BOPE test
- ☐ Other

Date/Time _____ AM ☐ PM ☐

Remarks _____

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING
ENTITY ACTION FORM -FORM 6

OPERATOR: NEWFIELD PRODUCTION COMPANY
ADDRESS: RT. 3 BOX 3630
MYTON, UT 84052

OPERATOR ACCT. NO. N2695

| ACTION CODE | CURRENT ENTITY NO. | NEW ENTITY NO. | API NUMBER | WELL NAME | WELL LOCATION | | | | COUNTY | SPUD DATE | EFFECTIVE DATE |
|-------------------------------------|--------------------|----------------|------------|----------------|---------------|----|----|-----|----------|------------|----------------|
| | | | | | QQ | SC | TP | RG | | | |
| B | 99999 | 17400 | 4301350798 | GMBU Q-22-8-17 | SWSW | 22 | 8S | 17E | Duchesne | 4/12/2012 | 4/24/12 |
| WELL 1 COMMENTS: GRRV | | | | | | | | | | | |
| B | 99999 | 17400 | 4301350530 | GMBU N-23-8-17 | NWSW | 23 | 8S | 17E | Duchesne | 4/11/2012 | 4/24/12 |
| GRRV | | | | | | | | | | | |
| B | 99999 | 17400 | 4301350531 | GMBU Q-23-8-17 | NWSW | 23 | 8S | 17E | Duchesne | 4/10/2012 | 4/24/12 |
| GRRV | | | | | | | | | | | |
| E | 99999 | 18333 | 4301350813 | WHITE 7-6-3-1W | SWNE | 6 | 3S | 1W | DUCHESNE | 11/18/2011 | 4/24/12 |
| CHANGE FORMATION FROM WSTC TO GR-WS | | | | | | | | | | | |
| CONFIDENTIAL | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |

ACTION CODES (See instructions on back of form)

- A - new entity for new well (single well only)
- B - well to existing entity (group or unit well)
- C - from one existing entity to another existing entity
- D - well from one existing entity to a new entity
- E - other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

RECEIVED

APR 23 2012

Div. of Oil, Gas & Mining

Tabitha Timothy
Signature

Tabitha Timothy

Production Clerk

04/18/12

BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# SS#2
Submitted By Justin Crum Phone Number 823-6732
Well Name/Number GMBU N-23-8-17
Qtr/Qtr SWNW Section 23 Township T8S Range 17E
Lease Serial Number UTU-76239
API Number 43-013-50530

Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string.

Date/Time _____ AM ☐ PM ☐

Casing – Please report time casing run starts, not cementing times.

- ☐ Surface Casing
- ☐ Intermediate Casing
- ☐ Production Casing
- ☐ Liner
- ☐ Other

RECEIVED

MAY 02 2012

DIV. OF OIL, GAS & MINING

Date/Time _ _ AM ☐ PM ☐

BOPE

- ☒ Initial BOPE test at surface casing point
- ☐ BOPE test at intermediate casing point
- ☐ 30 day BOPE test
- ☐ Other

Date/Time 5/2/2012 10:00 AM ☒ PM ☐

Remarks Rig move notice

BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# SS#2
Submitted By Jim Smith Phone Number 823-2072
Well Name/Number GMBU N-23-8-17
Qtr/Qtr NW/SW Section 23 Township 8S Range 17E
Lease Serial Number UTU-76239
API Number 43-013-50530

Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string.

Date/Time AM ☐ PM ☐

Casing – Please report time casing run starts, not cementing times.

- ☐ Surface Casing
- ☐ Intermediate Casing
- ☒ Production Casing
- ☐ Liner
- ☐ Other

Date/Time 5/5/12 7:00 AM ☒ PM ☐

BOPE

- ☐ Initial BOPE test at surface casing point
- ☐ BOPE test at intermediate casing point
- ☐ 30 day BOPE test
- ☐ Other

Date/Time AM ☐ PM ☐

Remarks -

RECEIVED

MAY 08 2012

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other Instructions on page 2

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

NEWFIELD PRODUCTION COMPANY

3a. Address

Route 3 Box 3630
Myton, UT 84052

3b. Phone (include area code)

435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1874 FSL 0723 FWL
Section 23 T8S R17E

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

5. Lease Serial No.

USA UTU-76239

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or

GMBU

8. Well Name and No.

GRTR MON BUTTE N-23-8-17

9. API Well No.

4301350530

10. Field and Pool, or Exploratory Area

GREATER MB UNIT

11. County or Parish, State

DUCHESNE, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

| TYPE OF SUBMISSION | TYPE OF ACTION | | | |
|---|--|---|--|---|
| <input type="checkbox"/> Notice of Intent | <input type="checkbox"/> Acidize | <input type="checkbox"/> Deepen | <input type="checkbox"/> Production (Start/Resume) | <input type="checkbox"/> Water Shut-Off |
| <input checked="" type="checkbox"/> Subsequent Report | <input type="checkbox"/> Alter Casing | <input type="checkbox"/> Fracture Treat | <input type="checkbox"/> Reclamation | <input type="checkbox"/> Well Integrity |
| <input type="checkbox"/> Final Abandonment | <input type="checkbox"/> Casing Repair | <input type="checkbox"/> New Construction | <input type="checkbox"/> Recomplete | <input checked="" type="checkbox"/> Other _____ |
| | <input type="checkbox"/> Change Plans | <input type="checkbox"/> Plug & Abandon | <input type="checkbox"/> Temporarily Abandon | Spud Notice |
| | <input type="checkbox"/> Convert to Injector | <input type="checkbox"/> Plug Back | <input type="checkbox"/> Water Disposal | |

13. Describe Proposed or Completed Operation: (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 4/11/12 MIRU Ross #29. Spud well @9:00 AM. Drill 310' of 12 1/4" hole with air mist. TIH W/ 7 Jt's 8 5/8" J-55 24# csgn. Set @ 312.27. On 4/12/12 cement with 160 sks of class "G" w/ 2% CaCL2 + 0.25#/sk Cello- Flake Mixed @ 15.8ppg w/ 1.17ft3/sk yield. Returned 7 barrels cement to pit. WOC.

RECEIVED

MAY 24 2012

DIV. OF OIL, GAS & MINING

I hereby certify that the foregoing is true and correct (Printed/ Typed)

Title

Branden Arnold

Signature

Branden Arnold

Date

04/18/2012

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on page 2)

Casing / Liner Detail

Well GMBU N-23-8-17
Prospect Monument Butte
Foreman
Run Date:
String Type Surface, 8.625", 24#, J-55, STC (Generic)

- Detail From Top To Bottom -

| Depth | Length | JTS | Description | OD | ID |
|--------|--------|-----|--------------|-------|----|
| 312.85 | 1.42 | 1 | Wellhead | | |
| 314.27 | -2.00 | | Cut Off | 8.625 | |
| 10.00 | 259.65 | 6 | 8 5/8 Casing | 8.625 | |
| 269.65 | 42.30 | 1 | Shoe Jiont | 8.625 | |
| 311.95 | 0.90 | 1 | Guide Shoe | 8.625 | |
| 312.27 | | | KB | | |

Cement Detail

| | | | | | |
|--|------------|--------------|-------|--------------|--|
| Cement Company: | | BJ | | | |
| Slurry | # of Sacks | Weight (ppg) | Yield | Volume (ft³) | Description - Slurry Class and Additives |
| Slurry 1 | 160 | 15.8 | 1.17 | 187.2 | Class "G"+2%CaCl |
| | | | | | |
| Stab-In-Job? | | No | | | |
| BHT: | | 0 | | | |
| Initial Circulation Pressure: | | | | | |
| Initial Circulation Rate: | | | | | |
| Final Circulation Pressure: | | | | | |
| Final Circulation Rate: | | | | | |
| Displacement Fluid: | | Water | | | |
| Displacement Rate: | | | | | |
| Displacement Volume: | | 16 | | | |
| Mud Returns: | | | | | |
| Centralizer Type And Placement: | | | | | |
| Middle of first, top of second and third for a total of three. | | | | | |
| Cement To Surface? | | Yes | | | |
| Est. Top of Cement: | | 0 | | | |
| Plugs Bumped? | | Yes | | | |
| Pressure Plugs Bumped: | | 383 | | | |
| Floats Holding? | | No | | | |
| Casing Stuck On / Off Bottom? | | No | | | |
| Casing Reciprocated? | | No | | | |
| Casing Rotated? | | No | | | |
| CIP: | | 11:00 | | | |
| Casing Wt Prior To Cement: | | | | | |
| Casing Weight Set On Slips: | | | | | |

| | | |
|--|--|--|
| STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING | | FORM 9 |
| SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals. | | 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-76239 |
| 1. TYPE OF WELL Oil Well | | 6. IF INDIAN, ALLOTTEE OR TRIBE NAME: |
| 2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY | | 7. UNIT or CA AGREEMENT NAME: GMBU (GRRV) |
| 3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052 | | 8. WELL NAME and NUMBER: GREATER MON BUTTE N-23-8-17 |
| 4. LOCATION OF WELL FOOTAGES AT SURFACE: 1874 FSL 0723 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWSW Section: 23 Township: 08.0S Range: 17.0E Meridian: S | | 9. API NUMBER: 43013505300000 |
| PHONE NUMBER: 435 646-4825 Ext | | 9. FIELD and POOL or WILDCAT: MONUMENT BUTTE |
| COUNTY: DUCHESNE | | STATE: UTAH |
| 11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA | | |
| TYPE OF SUBMISSION | TYPE OF ACTION | |
| <input type="checkbox"/> NOTICE OF INTENT Approximate date work will start: <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input checked="" type="checkbox"/> DRILLING REPORT Report Date: 5/29/2012 | <div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input checked="" type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </div> <div style="width: 33%;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </div> <div style="width: 33%;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100%;" type="text"/> </div> </div> | |
| 12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. <div style="display: flex; justify-content: space-between;"> <div style="width: 60%;"> <p>The above well was placed on production on 5/29/2012 at 19:00 hours. Production Start Sundry resent 10/5/2012.</p> </div> <div style="width: 35%; text-align: center;"> <p>Accepted by the Utah Division of Oil, Gas and Mining</p> <p>FOR RECORD ONLY</p> <p>October 05, 2012</p> </div> </div> | | |
| NAME (PLEASE PRINT) Kaci Deveraux | | PHONE NUMBER 435 646-4867 |
| SIGNATURE N/A | | TITLE Production Technician |
| DATE 10/5/2012 | | |

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. Lease Serial No.
UTU-76239

1a. Type of Well ☒ Oil Well ☐ Gas Well ☐ Dry ☐ Other
b. Type of Completion: ☒ New Well ☐ Work Over ☐ Deepen ☐ Plug Back ☐ Diff. Reserv.,
Other: _____

6. If Indian, Allottee or Tribe Name
NA

7. Unit or CA Agreement Name and No.
GMBU (GRRV)

2. Name of Operator
NEWFIELD EXPLORATION COMPANY

8. Lease Name and Well No.
GMBU N-23-8-17

3. Address
1401 17TH ST. SUITE 1000 DENVER, CO 80202

3a. Phone No. (include area code)
(435) 646-3721

9. AFI Well No.
43-013-50530

4. Location of Well (Report location clearly and in accordance with Federal requirements)*

At surface 1874' FSL & 723' FWL (NW/SW) SEC. 23, T8S, R17E (UTU-76239)

10. Field and Pool or Exploratory
MONUMENT BUTTE

11. Sec., T., R., M., on Block and
Survey or Area
SEC. 23, T8S, R17E

At top prod. interval reported below 2573' FSL & 1305' FWL (NW/SW) SEC. 23, T8S, R17E (UTU-76239)

12. County or Parish
DUCHESNE

13. State
UT

At total depth 2615' FSL & 1348' FWL (NE/SW) SEC. 23, T8S, R17E (UTU-76239) BHL by HSM

14. Date Spudded
04/11/2012

15. Date T.D. Reached
05/06/2012

16. Date Completed 05/29/2012
☐ D & A ☒ Ready to Prod.

17. Elevations (DF, RKB, RT, GL)*
5109' GL 5119' KB

18. Total Depth: MD 6682'
TVD 6601'

19. Plug Back T.D.: MD 6650'
TVD 6569

20. Depth Bridge Plug Set: MD
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)

DUAL IND GRD, SP, COMP. DENSITY, COMP. NEUTRON, GR, CALIPER, CMT BOND

22. Was well cored? ☒ No ☐ Yes (Submit analysis)
Was DST run? ☒ No ☐ Yes (Submit report)
Directional Survey? ☐ No ☒ Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

| Hole Size | Size/Grade | Wt. (#/ft.) | Top (MD) | Bottom (MD) | Stage Cementer Depth | No. of Sk. & Type of Cement | Slurry Vol. (BBL) | Cement Top* | Amount Pulled |
|-----------|-------------|-------------|----------|-------------|----------------------|-----------------------------|-------------------|-------------|---------------|
| 12-1/4" | 8-5/8" J-55 | 24# | 0 | 312' | | 160 CLASS G | | | |
| 7-7/8" | 5-1/2" J-55 | 15.5# | 0 | 6673' | | 250 PRIMLITE | | Surface | |
| | | | | | | 475 50/50 POZ | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

24. Tubing Record

| Size | Depth Set (MD) | Packer Depth (MD) | Size | Depth Set (MD) | Packer Depth (MD) | Size | Depth Set (MD) | Packer Depth (MD) |
|--------|----------------|-------------------|------|----------------|-------------------|------|----------------|-------------------|
| 2-7/8" | EOT @ 6257' | TA @ 6159' | | | | | | |

25. Producing Intervals

| Formation | Top | Bottom | Perforated Interval | Size | No. Holes | Perf. Status |
|----------------|-------|--------|---------------------|-------|-----------|--------------|
| A) Green River | 4707' | 6200' | 4707-6200' | 0.34" | 36 | |
| B) | | | | | | |
| C) | | | | | | |
| D) | | | | | | |

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

| Depth Interval | Amount and Type of Material |
|----------------|--|
| 4707-6200' | Frac w/ 185113#s 20/40 white sand in 1691 bbls of Lightning 17 fluid, in 3 stages. |
| | |
| | |

28. Production - Interval A

| Date First Produced | Test Date | Hours Tested | Test Production | Oil BBL | Gas MCF | Water BBL | Oil Gravity Corr. API | Gas Gravity | Production Method |
|---------------------|----------------------|--------------|-----------------|---------|---------|-----------|-----------------------|-------------|---|
| 5/29/12 | 6/9/12 | 24 | → | 82 | 39 | 43 | | | 2-1/2" x 1-1/2" x 20' X 21' x 24' RHAC Pump |
| Choke Size | Tbg. Press. Flwg. SI | Csg. Press. | 24 Hr. Rate | Oil BBL | Gas MCF | Water BBL | Gas/Oil Ratio | Well Status | |
| | | | → | | | | | PRODUCING | |

28a. Production - Interval B

| Date First Produced | Test Date | Hours Tested | Test Production | Oil BBL | Gas MCF | Water BBL | Oil Gravity Corr. API | Gas Gravity | Production Method |
|---------------------|----------------------|--------------|-----------------|---------|---------|-----------|-----------------------|-------------|-------------------|
| | | | → | | | | | | |
| Choke Size | Tbg. Press. Flwg. SI | Csg. Press. | 24 Hr. Rate | Oil BBL | Gas MCF | Water BBL | Gas/Oil Ratio | Well Status | |
| | | | → | | | | | | |

RECEIVED

05 9 2012

*(See instructions and spaces for additional data on page 2)

Div. of Oil, Gas & Mining

28b. Production - Interval C

| Date First Produced | Test Date | Hours Tested | Test Production → | Oil BBL | Gas MCF | Water BBL | Oil Gravity Corr. API | Gas Gravity | Production Method |
|---------------------|----------------------------|--------------|----------------------|---------|---------|-----------|-----------------------|-------------|-------------------|
| Choke Size | Tbg. Press. Flwg. SI | Csg. Press. | 24 Hr. Rate → | Oil BBL | Gas MCF | Water BBL | Gas/Oil Ratio | Well Status | |

28c. Production - Interval D

| Date First Produced | Test Date | Hours Tested | Test Production → | Oil BBL | Gas MCF | Water BBL | Oil Gravity Corr. API | Gas Gravity | Production Method |
|---------------------|----------------------------|--------------|----------------------|---------|---------|-----------|-----------------------|-------------|-------------------|
| Choke Size | Tbg. Press. Flwg. SI | Csg. Press. | 24 Hr. Rate → | Oil BBL | Gas MCF | Water BBL | Gas/Oil Ratio | Well Status | |

29. Disposition of Gas (Solid, used for fuel, vented, etc.)

SOLD AND USED FOR FUEL

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof. Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

GEOLOGICAL MARKERS

| Formation | Top | Bottom | Descriptions, Contents, etc. | Name | Top |
|-------------|-------|--------|------------------------------|---------------------------------------|----------------|
| | | | | | Meas. Depth |
| GREEN RIVER | 4707' | 6200' | | GARDEN GULCH MRK GARDEN GULCH 1 | 4263' 4453' |
| | | | | GARDEN GULCH 2 POINT 3 | 4577' 4868' |
| | | | | X MRKR Y MRKR | 5103' 5140' |
| | | | | DOUGLAS CREEK MRK BI CARBONATE MRK | 5281' 5561' |
| | | | | B LIMESTON MRK CASTLE PEAK | 5715' 5118' |
| | | | | BASAL CARBONATE | 6543' |

32. Additional remarks (include plugging procedure):

33. Indicate which items have been attached by placing a check in the appropriate boxes:

- ☐ Electrical/Mechanical Logs (1 full set req'd.)
 ☐ Geologic Report
 ☐ DST Report
 ☒ Directional Survey
☐ Sundry Notice for plugging and cement verification
 ☐ Core Analysis
 ☐ Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Jennifer Peatross

Title Production Technician

Signature

Date 07/05/2012

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 3)

(Form 3160-4, page 2)

Daily Activity Report

Format For Sundry

GMBU N-23-8-17

3/1/2012 To 7/30/2012

5/16/2012 Day: 1

Completion

Rigless on 5/16/2012 - Run CBL, psi test csg, BOPs & frac valve. Perforate stg 1. - Wait on perforators to finish a job on another well - CBL, psi test & perforate GMBU Q-23-8-17. - Ru Perforators wireline-run CBL from 6612' to surface under 0 psi. RU Preferred hotoiler & B&C Quick Test. Psi test csg to 4300# for 30 min-good test. PSI test frac valves & flow valves to 4300# for 5 min-good test. RIH w/wireline, perforate stg 1, CP1 @ 6199'-6200', 6187'-6188', 6179'-6180'. RDMO wireline @ test trucks.

Daily Cost: \$0

Cumulative Cost: \$20,644

5/17/2012 Day: 2

Completion

Rigless on 5/17/2012 - Frac stg1-perforate stg 2 - Frac stg 1-perforate stg 2-SWIFN - Safety meeting-pressure test frac iron to 5200#-good test - Frac GMBU Q-23-8-17 - RD Q-23, RU N-23-8-17

Daily Cost: \$0

Cumulative Cost: \$20,944

5/18/2012 Day: 3

Completion

Rigless on 5/18/2012 - Frac stg 2-perforate & frac stg 3-flowback well - Flowback well - Frac stg2-perforate & frac stg 3 - Safety meeting-psi test frac iron to 5200#-good test

Daily Cost: \$0

Cumulative Cost: \$105,407

5/29/2012 Day: 5

Completion

WWS #5 on 5/29/2012 - Finish Clean Out to PBTD. Swab Well. - Safety Meeting. JSA. SITP 175 psi, SICP 250 psi. TIH Tag sand @ 6550' Clean Out to PBTD @ 6650' Circulate Hole Clean. RD Swivel LD 3 Jts. RU Swab Swab Back 168 bbls 21 runs, IFL @ Surface. FFL @ 2300' Trace Off oil. RD Rack out Swab. CWI. - MIRU. CK Press 650psi RU WL Press test Lub. RIH Set kill Plug @ 4630' POOH & RD W/L. ND Frac Valve NU BOPs Press test Double Rams & Valves To 5000 psi. PU & TIH w/ 4-3/4 Bit Pump Off Bit Sub. 148 jts 2-7/8 Tbg Tag kill Plug @ 4630'. RU Swivel & Pump Drill Plugs Out (5 min) RIH Tag Plug @ 4930 Drill up Plug (12 min) TIH tag Plug @ 5460' Drill Out Plug (13 min) Circulate Hole Clean. EOT @ 5491' CWI - MIRU. CK Press 650psi RU WL Press test Lub. RIH Set kill Plug @ 4630' POOH & RD W/L. ND Frac Valve NU BOPs Press test Double Rams & Valves To 5000 psi. PU & TIH w/ 4-3/4 Bit Pump Off Bit Sub. 148 jts 2-7/8 Tbg Tag kill Plug @ 4630'. RU Swivel & Pump Drill Plugs Out (5 min) RIH Tag Plug @ 4930 Drill up Plug (12 min) TIH tag Plug @ 5460' Drill Out Plug (13 min) Circulate Hole Clean. EOT @ 5491' CWI - Safety Meeting. JSA. SITP 175 psi, SICP 250 psi. TIH Tag sand @ 6550' Clean Out to PBTD @ 6650' Circulate Hole Clean. RD Swivel LD 3 Jts. RU Swab Swab Back 168 bbls 21 runs, IFL @ Surface. FFL @ 2300' Trace Off oil. RD Rack out Swab. CWI.

Daily Cost: \$0

Cumulative Cost: \$170,179

5/30/2012 Day: 6

Completion

WWS #5 on 5/30/2012 - Trip Tbg RIH w/ Rods Put well On Production. - Safety meeting .JSA. SITP 300 psi. SICP 400psi. Bleed off well pump 35 bbls down tbg. Pu 3 jts RIH tag PBTD @ 6650' (no fill) Circulate Hole Clean POOH w/ Tbg LD 9 jts. TOOH w/ 199 jts , 4-3/4 bit & pump off bit sub. LD Bit & Sub. PU & TIH w/ NC, 2 jts 2-7/8, PSN, 1 jts 2-7/8, 5-1/2 TAC w/ 45K shear, 196 jts 2-7/8 J-55 Tbg.ND BOPs Set AC W/ w/ 18000# Tension, NU WH.X over to Rods. - PU & RIH w/ 2-1/2 X 1-3/4 X 24' pump , 5 1-1/2 sinker bars w/ guided subs, 155 3/4" guide rods 4per, 85 7/8" guided rods 4 per, 2 7/8 pony rods 2', 8', 1-1/2 X 30 sapary metal polish rod. Seat pump Press test pump to 800 psi (good test). Space out rods hang Horses Head. RDMO - 144" SL 5 SPM

Daily Cost: \$0

Cumulative Cost: \$240,249

Pertinent Files: Go to File List

NEWFIELD

NEWFIELD EXPLORATION

**USGS Myton SW (UT)
SECTION 23 T8S, R17E
N-23-8-17**

Wellbore #1

Design: Actual


Standard Survey Report

09 May, 2012





Payzone Directional Survey Report



| | | | |
|------------------|----------------------|-------------------------------------|-----------------------------------|
| Company: | NEWFIELD EXPLORATION | Local Co-ordinate Reference: | Well N-23-8-17 |
| Project: | USGS Myton SW (UT) | TVD Reference: | N-23-8-17 @ 5121.0ft (NDSI SS #2) |
| Site: | SECTION 23 T8S, R17E | MD Reference: | N-23-8-17 @ 5121.0ft (NDSI SS #2) |
| Well: | N-23-8-17 | North Reference: | True |
| Wellbore: | Wellbore #1 | Survey Calculation Method: | Minimum Curvature |
| Design: | Actual | Database: | EDM 2003.21 Single User Db |

| | | | |
|--------------------|--|----------------------|----------------|
| Project | USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA | | |
| Map System: | US State Plane 1983 | System Datum: | Mean Sea Level |
| Geo Datum: | North American Datum 1983 | | |
| Map Zone: | Utah Central Zone | | |

| | | | |
|------------------------------|----------------------|--------------------------|------------------|
| Site | SECTION 23 T8S, R17E | | |
| Site Position: | | Northing: | 7,207,900.00 ft |
| From: | Map | Easting: | 2,064,500.00 ft |
| Position Uncertainty: | 0.0 ft | Slot Radius: | " |
| | | Latitude: | 40° 5' 51.665 N |
| | | Longitude: | 109° 59' 2.132 W |
| | | Grid Convergence: | 0.97 ° |

| | | | |
|-----------------------------|--|----------------------------|----------------------------------|
| Well | N-23-8-17, SHL LAT: 40° 06' 04.82, LONG: -109° 58' 49.99 | | |
| Well Position | +N/-S | 0.0 ft | Northing: 7,209,246.87 ft |
| | +E/-W | 0.0 ft | Easting: 2,065,420.75 ft |
| Position Uncertainty | 0.0 ft | Wellhead Elevation: | ft |
| | | Latitude: | 40° 6' 4.820 N |
| | | Longitude: | 109° 58' 49.990 W |
| | | Ground Level: | 5,109.0 ft |

| | | | | | |
|------------------|-------------------|--------------------|------------------------|----------------------|----------------------------|
| Wellbore | Wellbore #1 | | | | |
| Magnetics | Model Name | Sample Date | Declination (°) | Dip Angle (°) | Field Strength (nT) |
| | IGRF2010 | 10/4/2010 | 11.38 | 65.88 | 52,385 |

| | | | | |
|--------------------------|------------------------------|-------------------|-------------------|--------------------------|
| Design | Actual | | | |
| Audit Notes: | | | | |
| Version: | 1.0 | Phase: | ACTUAL | Tie On Depth: 0.0 |
| Vertical Section: | Depth From (TVD) (ft) | +N/-S (ft) | +E/-W (ft) | Direction (°) |
| | 0.0 | 0.0 | 0.0 | 39.24 |

| | | | | |
|-----------------------|----------------|--------------------------|------------------|--------------------|
| Survey Program | Date 5/9/2012 | | | |
| From (ft) | To (ft) | Survey (Wellbore) | Tool Name | Description |
| 378.0 | 6,682.0 | Survey #1 (Wellbore #1) | MWD | MWD - Standard |

| | | | | | | | | | | |
|---------------|----------------------------|------------------------|--------------------|----------------------------|-------------------|-------------------|------------------------------|------------------------------|-----------------------------|----------------------------|
| Survey | Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| | 0.0 | 0.00 | 0.00 | 0.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| | 378.0 | 1.80 | 98.30 | 377.9 | -0.9 | 5.9 | 3.1 | 0.48 | 0.48 | 0.00 |
| | 408.0 | 1.60 | 98.35 | 407.9 | -1.0 | 6.8 | 3.5 | 0.67 | -0.67 | 0.17 |
| | 439.0 | 1.70 | 89.00 | 438.9 | -1.0 | 7.6 | 4.0 | 0.93 | 0.32 | -30.16 |
| | 469.0 | 1.80 | 81.60 | 468.9 | -1.0 | 8.6 | 4.7 | 0.82 | 0.33 | -24.67 |
| | 500.0 | 1.90 | 80.70 | 499.9 | -0.8 | 9.5 | 5.4 | 0.34 | 0.32 | -2.90 |
| | 531.0 | 1.90 | 75.50 | 530.9 | -0.6 | 10.5 | 6.2 | 0.56 | 0.00 | -16.77 |
| | 561.0 | 2.00 | 69.30 | 560.8 | -0.3 | 11.5 | 7.1 | 0.78 | 0.33 | -20.67 |
| | 591.0 | 2.20 | 59.70 | 590.8 | 0.2 | 12.5 | 8.1 | 1.35 | 0.67 | -32.00 |
| | 622.0 | 2.30 | 51.20 | 621.8 | 0.9 | 13.5 | 9.2 | 1.12 | 0.32 | -27.42 |
| | 652.0 | 2.40 | 45.50 | 651.8 | 1.7 | 14.4 | 10.4 | 0.85 | 0.33 | -19.00 |
| | 683.0 | 2.55 | 41.70 | 682.7 | 2.7 | 15.3 | 11.8 | 0.72 | 0.48 | -12.26 |
| | 713.0 | 2.50 | 39.77 | 712.7 | 3.7 | 16.2 | 13.1 | 0.33 | -0.17 | -6.43 |



Payzone Directional Survey Report



Company: NEWFIELD EXPLORATION
Project: USGS Myton SW (UT)
Site: SECTION 23 T8S, R17E
Well: N-23-8-17
Wellbore: Wellbore #1
Design: Actual

Local Co-ordinate Reference: Well N-23-8-17
TVD Reference: N-23-8-17 @ 5121.0ft (NDSI SS #2)
MD Reference: N-23-8-17 @ 5121.0ft (NDSI SS #2)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.21 Single User Db

| Survey | | | | | | | | | | |
|---------------------------|--------------------|----------------|---------------------------|---------------|---------------|-----------------------------|-----------------------------|----------------------------|---------------------------|--|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) | |
| 743.0 | 2.50 | 40.70 | 742.7 | 4.7 | 17.1 | 14.4 | 0.14 | 0.00 | 3.10 | |
| 774.0 | 2.40 | 34.30 | 773.7 | 5.7 | 17.9 | 15.7 | 0.94 | -0.32 | -20.65 | |
| 804.0 | 2.60 | 33.20 | 803.6 | 6.8 | 18.6 | 17.0 | 0.69 | 0.67 | -3.67 | |
| 834.0 | 2.90 | 31.20 | 833.6 | 8.0 | 19.4 | 18.5 | 1.05 | 1.00 | -6.67 | |
| 865.0 | 3.30 | 27.30 | 864.6 | 9.5 | 20.2 | 20.1 | 1.46 | 1.29 | -12.58 | |
| 895.0 | 3.65 | 32.00 | 894.5 | 11.1 | 21.1 | 21.9 | 1.50 | 1.17 | 15.67 | |
| 926.0 | 4.20 | 31.90 | 925.4 | 12.9 | 22.2 | 24.0 | 1.77 | 1.77 | -0.32 | |
| 957.0 | 4.40 | 35.30 | 956.3 | 14.8 | 23.5 | 26.3 | 1.04 | 0.65 | 10.97 | |
| 987.0 | 4.70 | 40.60 | 986.2 | 16.7 | 24.9 | 28.7 | 1.72 | 1.00 | 17.67 | |
| 1,031.0 | 5.50 | 42.00 | 1,030.1 | 19.6 | 27.5 | 32.6 | 1.84 | 1.82 | 3.18 | |
| 1,075.0 | 6.20 | 42.20 | 1,073.8 | 22.9 | 30.5 | 37.1 | 1.59 | 1.59 | 0.45 | |
| 1,118.0 | 6.50 | 43.00 | 1,116.6 | 26.4 | 33.8 | 41.8 | 0.73 | 0.70 | 1.86 | |
| 1,162.0 | 6.90 | 42.10 | 1,160.3 | 30.2 | 37.2 | 46.9 | 0.94 | 0.91 | -2.05 | |
| 1,206.0 | 7.40 | 41.90 | 1,203.9 | 34.3 | 40.9 | 52.4 | 1.14 | 1.14 | -0.45 | |
| 1,250.0 | 8.10 | 41.40 | 1,247.5 | 38.7 | 44.8 | 58.3 | 1.60 | 1.59 | -1.14 | |
| 1,293.0 | 8.50 | 43.10 | 1,290.1 | 43.3 | 49.0 | 64.5 | 1.09 | 0.93 | 3.95 | |
| 1,337.0 | 9.00 | 42.40 | 1,333.6 | 48.2 | 53.5 | 71.2 | 1.16 | 1.14 | -1.59 | |
| 1,381.0 | 9.50 | 42.50 | 1,377.0 | 53.4 | 58.3 | 78.3 | 1.14 | 1.14 | 0.23 | |
| 1,425.0 | 9.90 | 42.30 | 1,420.4 | 58.9 | 63.3 | 85.7 | 0.91 | 0.91 | -0.45 | |
| 1,469.0 | 10.20 | 41.90 | 1,463.7 | 64.6 | 68.5 | 93.4 | 0.70 | 0.68 | -0.91 | |
| 1,512.0 | 10.30 | 40.90 | 1,506.0 | 70.4 | 73.5 | 101.0 | 0.47 | 0.23 | -2.33 | |
| 1,556.0 | 10.50 | 41.10 | 1,549.3 | 76.4 | 78.7 | 108.9 | 0.46 | 0.45 | 0.45 | |
| 1,600.0 | 10.70 | 39.80 | 1,592.5 | 82.5 | 84.0 | 117.0 | 0.71 | 0.45 | -2.95 | |
| 1,644.0 | 10.70 | 39.60 | 1,635.8 | 88.8 | 89.2 | 125.2 | 0.08 | 0.00 | -0.45 | |
| 1,688.0 | 10.70 | 38.90 | 1,679.0 | 95.1 | 94.4 | 133.4 | 0.30 | 0.00 | -1.59 | |
| 1,731.0 | 10.80 | 37.80 | 1,721.2 | 101.4 | 99.4 | 141.4 | 0.53 | 0.23 | -2.56 | |
| 1,775.0 | 10.70 | 37.70 | 1,764.5 | 107.9 | 104.4 | 149.6 | 0.23 | -0.23 | -0.23 | |
| 1,819.0 | 10.60 | 38.00 | 1,807.7 | 114.3 | 109.4 | 157.7 | 0.26 | -0.23 | 0.68 | |
| 1,863.0 | 10.60 | 37.10 | 1,851.0 | 120.7 | 114.3 | 165.8 | 0.38 | 0.00 | -2.05 | |
| 1,907.0 | 10.30 | 37.50 | 1,894.2 | 127.1 | 119.1 | 173.8 | 0.70 | -0.68 | 0.91 | |
| 1,950.0 | 10.00 | 36.20 | 1,936.6 | 133.1 | 123.7 | 181.4 | 0.88 | -0.70 | -3.02 | |
| 1,994.0 | 9.60 | 34.50 | 1,979.9 | 139.3 | 128.0 | 188.8 | 1.12 | -0.91 | -3.86 | |
| 2,038.0 | 9.70 | 34.00 | 2,023.3 | 145.4 | 132.2 | 196.2 | 0.30 | 0.23 | -1.14 | |
| 2,082.0 | 10.00 | 34.50 | 2,066.7 | 151.6 | 136.4 | 203.7 | 0.71 | 0.68 | 1.14 | |
| 2,125.0 | 10.20 | 35.80 | 2,109.0 | 157.7 | 140.7 | 211.2 | 0.71 | 0.47 | 3.02 | |
| 2,169.0 | 10.00 | 36.20 | 2,152.3 | 164.0 | 145.3 | 218.9 | 0.48 | -0.45 | 0.91 | |
| 2,213.0 | 9.80 | 36.60 | 2,195.6 | 170.1 | 149.8 | 226.5 | 0.48 | -0.45 | 0.91 | |
| 2,257.0 | 10.00 | 37.50 | 2,239.0 | 176.1 | 154.3 | 234.0 | 0.57 | 0.45 | 2.05 | |
| 2,301.0 | 10.30 | 36.50 | 2,282.3 | 182.3 | 159.0 | 241.8 | 0.79 | 0.68 | -2.27 | |
| 2,344.0 | 10.66 | 36.39 | 2,324.6 | 188.6 | 163.6 | 249.6 | 0.84 | 0.84 | -0.26 | |
| 2,388.0 | 10.80 | 37.90 | 2,367.8 | 195.1 | 168.6 | 257.8 | 0.71 | 0.32 | 3.43 | |
| 2,432.0 | 10.80 | 40.30 | 2,411.0 | 201.5 | 173.8 | 266.0 | 1.02 | 0.00 | 5.45 | |
| 2,476.0 | 10.20 | 44.00 | 2,454.3 | 207.5 | 179.2 | 274.0 | 2.05 | -1.36 | 8.41 | |
| 2,520.0 | 10.00 | 43.90 | 2,497.6 | 213.0 | 184.5 | 281.7 | 0.46 | -0.45 | -0.23 | |
| 2,564.0 | 9.80 | 42.70 | 2,541.0 | 218.5 | 189.7 | 289.2 | 0.65 | -0.45 | -2.73 | |
| 2,607.0 | 9.80 | 40.50 | 2,583.3 | 224.0 | 194.6 | 296.6 | 0.87 | 0.00 | -5.12 | |
| 2,651.0 | 10.00 | 37.50 | 2,626.7 | 229.9 | 199.3 | 304.1 | 1.26 | 0.45 | -6.82 | |
| 2,695.0 | 10.20 | 34.40 | 2,670.0 | 236.1 | 203.8 | 311.8 | 1.32 | 0.45 | -7.05 | |
| 2,739.0 | 10.20 | 30.94 | 2,713.3 | 242.7 | 208.0 | 319.6 | 1.39 | 0.00 | -7.86 | |
| 2,783.0 | 9.40 | 30.60 | 2,756.7 | 249.1 | 211.9 | 327.0 | 1.82 | -1.82 | -0.77 | |
| 2,827.0 | 9.14 | 29.90 | 2,800.1 | 255.2 | 215.4 | 334.0 | 0.64 | -0.59 | -1.59 | |
| 2,871.0 | 9.36 | 34.20 | 2,843.5 | 261.2 | 219.2 | 341.0 | 1.65 | 0.50 | 9.77 | |
| 2,915.0 | 8.85 | 38.70 | 2,887.0 | 266.8 | 223.3 | 347.9 | 1.99 | -1.16 | 10.23 | |
| 2,958.0 | 9.10 | 36.50 | 2,929.4 | 272.1 | 227.4 | 354.6 | 0.99 | 0.58 | -5.12 | |



Payzone Directional Survey Report



| | | | |
|------------------|----------------------|-------------------------------------|-----------------------------------|
| Company: | NEWFIELD EXPLORATION | Local Co-ordinate Reference: | Well N-23-8-17 |
| Project: | USGS Myton SW (UT) | TVD Reference: | N-23-8-17 @ 5121.0ft (NDSI SS #2) |
| Site: | SECTION 23 T8S, R17E | MD Reference: | N-23-8-17 @ 5121.0ft (NDSI SS #2) |
| Well: | N-23-8-17 | North Reference: | True |
| Wellbore: | Wellbore #1 | Survey Calculation Method: | Minimum Curvature |
| Design: | Actual | Database: | EDM 2003.21 Single User Db |

| Survey | | | | | | | | | |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 3,002.0 | 10.00 | 35.40 | 2,972.8 | 278.0 | 231.7 | 361.9 | 2.09 | 2.05 | -2.50 |
| 3,046.0 | 11.00 | 33.55 | 3,016.1 | 284.7 | 236.2 | 369.9 | 2.40 | 2.27 | -4.20 |
| 3,090.0 | 11.70 | 34.80 | 3,059.2 | 291.8 | 241.1 | 378.5 | 1.69 | 1.59 | 2.84 |
| 3,134.0 | 12.00 | 37.40 | 3,102.3 | 299.1 | 246.4 | 387.6 | 1.39 | 0.68 | 5.91 |
| 3,177.0 | 12.17 | 38.70 | 3,144.3 | 306.2 | 252.0 | 396.6 | 0.75 | 0.40 | 3.02 |
| 3,221.0 | 10.95 | 37.20 | 3,187.4 | 313.2 | 257.4 | 405.4 | 2.86 | -2.77 | -3.41 |
| 3,265.0 | 9.80 | 35.24 | 3,230.7 | 319.5 | 262.1 | 413.3 | 2.73 | -2.61 | -4.45 |
| 3,309.0 | 9.00 | 33.30 | 3,274.1 | 325.5 | 266.1 | 420.4 | 1.96 | -1.82 | -4.41 |
| 3,353.0 | 8.50 | 29.90 | 3,317.6 | 331.2 | 269.6 | 427.1 | 1.63 | -1.14 | -7.73 |
| 3,396.0 | 8.20 | 28.70 | 3,360.2 | 336.6 | 272.7 | 433.2 | 0.81 | -0.70 | -2.79 |
| 3,440.0 | 7.70 | 29.84 | 3,403.7 | 341.9 | 275.7 | 439.2 | 1.19 | -1.14 | 2.59 |
| 3,484.0 | 7.70 | 33.26 | 3,447.3 | 347.0 | 278.8 | 445.1 | 1.04 | 0.00 | 7.77 |
| 3,528.0 | 8.70 | 36.17 | 3,490.9 | 352.1 | 282.3 | 451.3 | 2.46 | 2.27 | 6.61 |
| 3,571.0 | 9.40 | 39.70 | 3,533.4 | 357.4 | 286.5 | 458.1 | 2.08 | 1.63 | 8.21 |
| 3,615.0 | 9.10 | 40.40 | 3,576.8 | 362.8 | 291.1 | 465.1 | 0.73 | -0.68 | 1.59 |
| 3,659.0 | 8.40 | 36.74 | 3,620.3 | 368.1 | 295.2 | 471.8 | 2.03 | -1.59 | -8.32 |
| 3,703.0 | 8.30 | 35.80 | 3,663.8 | 373.2 | 299.0 | 478.2 | 0.38 | -0.23 | -2.14 |
| 3,747.0 | 8.90 | 37.20 | 3,707.3 | 378.5 | 302.9 | 484.8 | 1.44 | 1.36 | 3.18 |
| 3,791.0 | 9.90 | 42.70 | 3,750.7 | 384.0 | 307.6 | 492.0 | 3.05 | 2.27 | 12.50 |
| 3,834.0 | 10.20 | 45.39 | 3,793.1 | 389.4 | 312.8 | 499.4 | 1.30 | 0.70 | 6.26 |
| 3,878.0 | 10.50 | 44.30 | 3,836.4 | 395.0 | 318.3 | 507.3 | 0.81 | 0.68 | -2.48 |
| 3,922.0 | 10.33 | 42.80 | 3,879.6 | 400.8 | 323.8 | 515.2 | 0.73 | -0.39 | -3.41 |
| 3,966.0 | 10.20 | 42.10 | 3,922.9 | 406.5 | 329.1 | 523.1 | 0.41 | -0.30 | -1.59 |
| 4,010.0 | 10.20 | 42.20 | 3,966.2 | 412.3 | 334.3 | 530.8 | 0.04 | 0.00 | 0.23 |
| 4,053.0 | 10.20 | 43.20 | 4,008.5 | 417.9 | 339.5 | 538.4 | 0.41 | 0.00 | 2.33 |
| 4,097.0 | 10.68 | 45.60 | 4,051.8 | 423.6 | 345.1 | 546.4 | 1.47 | 1.09 | 5.45 |
| 4,141.0 | 10.80 | 45.70 | 4,095.0 | 429.3 | 351.0 | 554.5 | 0.28 | 0.27 | 0.23 |
| 4,185.0 | 10.20 | 45.50 | 4,138.3 | 435.0 | 356.7 | 562.5 | 1.37 | -1.36 | -0.45 |
| 4,229.0 | 10.00 | 44.60 | 4,181.6 | 440.4 | 362.1 | 570.2 | 0.58 | -0.45 | -2.05 |
| 4,273.0 | 10.10 | 43.20 | 4,225.0 | 445.9 | 367.5 | 577.8 | 0.60 | 0.23 | -3.18 |
| 4,316.0 | 10.10 | 40.40 | 4,267.3 | 451.6 | 372.5 | 585.4 | 1.14 | 0.00 | -6.51 |
| 4,360.0 | 10.50 | 39.80 | 4,310.6 | 457.6 | 377.6 | 593.2 | 0.94 | 0.91 | -1.36 |
| 4,403.0 | 10.50 | 39.20 | 4,352.9 | 463.6 | 382.5 | 601.1 | 0.25 | 0.00 | -1.40 |
| 4,447.0 | 10.80 | 37.90 | 4,396.1 | 470.0 | 387.6 | 609.2 | 0.87 | 0.68 | -2.95 |
| 4,491.0 | 11.40 | 39.30 | 4,439.3 | 476.6 | 392.9 | 617.7 | 1.49 | 1.36 | 3.18 |
| 4,535.0 | 11.50 | 40.80 | 4,482.4 | 483.3 | 398.5 | 626.4 | 0.71 | 0.23 | 3.41 |
| 4,579.0 | 11.80 | 40.40 | 4,525.5 | 490.0 | 404.3 | 635.3 | 0.71 | 0.68 | -0.91 |
| 4,623.0 | 12.10 | 39.30 | 4,568.5 | 497.0 | 410.1 | 644.4 | 0.86 | 0.68 | -2.50 |
| 4,666.0 | 11.70 | 37.60 | 4,610.6 | 504.0 | 415.6 | 653.2 | 1.24 | -0.93 | -3.95 |
| 4,710.0 | 11.50 | 35.50 | 4,653.7 | 511.1 | 420.9 | 662.1 | 1.06 | -0.45 | -4.77 |
| 4,754.0 | 10.90 | 36.50 | 4,696.9 | 518.0 | 425.9 | 670.6 | 1.43 | -1.36 | 2.27 |
| 4,798.0 | 10.30 | 37.80 | 4,740.1 | 524.4 | 430.8 | 678.7 | 1.47 | -1.36 | 2.95 |
| 4,842.0 | 9.80 | 38.10 | 4,783.5 | 530.5 | 435.5 | 686.4 | 1.14 | -1.14 | 0.68 |
| 4,886.0 | 9.80 | 35.60 | 4,826.8 | 536.5 | 440.0 | 693.9 | 0.97 | 0.00 | -5.68 |
| 4,930.0 | 9.60 | 37.30 | 4,870.2 | 542.4 | 444.4 | 701.3 | 0.79 | -0.45 | 3.86 |
| 4,973.0 | 9.00 | 38.90 | 4,912.6 | 547.9 | 448.7 | 708.2 | 1.52 | -1.40 | 3.72 |
| 5,017.0 | 8.80 | 41.70 | 4,956.1 | 553.1 | 453.1 | 715.0 | 1.08 | -0.45 | 6.36 |
| 5,061.0 | 9.20 | 42.60 | 4,999.5 | 558.2 | 457.7 | 721.9 | 0.96 | 0.91 | 2.05 |
| 5,105.0 | 9.20 | 41.90 | 5,043.0 | 563.4 | 462.5 | 728.9 | 0.25 | 0.00 | -1.59 |
| 5,149.0 | 9.00 | 42.40 | 5,086.4 | 568.6 | 467.1 | 735.9 | 0.49 | -0.45 | 1.14 |
| 5,192.0 | 9.20 | 43.20 | 5,128.9 | 573.6 | 471.8 | 742.7 | 0.55 | 0.47 | 1.86 |
| 5,236.0 | 9.10 | 47.70 | 5,172.3 | 578.5 | 476.7 | 749.6 | 1.64 | -0.23 | 10.23 |
| 5,281.0 | 9.14 | 45.53 | 5,216.8 | 583.4 | 481.9 | 756.7 | 0.77 | 0.09 | -4.82 |
| 5,324.0 | 9.70 | 45.70 | 5,259.2 | 588.3 | 487.0 | 763.7 | 1.30 | 1.30 | 0.40 |



Payzone Directional Survey Report



Company: NEWFIELD EXPLORATION
Project: USGS Myton SW (UT)
Site: SECTION 23 T8S, R17E
Well: N-23-8-17
Wellbore: Wellbore #1
Design: Actual

Local Co-ordinate Reference: Well N-23-8-17
TVD Reference: N-23-8-17 @ 5121.0ft (NDSI SS #2)
MD Reference: N-23-8-17 @ 5121.0ft (NDSI SS #2)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.21 Single User Db

Survey

| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
|---------------------------|--------------------|----------------|---------------------------|---------------|---------------|-----------------------------|-----------------------------|----------------------------|---------------------------|
| 5,368.0 | 10.33 | 43.70 | 5,302.5 | 593.7 | 492.3 | 771.3 | 1.64 | 1.43 | -4.55 |
| 5,412.0 | 10.59 | 43.10 | 5,345.8 | 599.5 | 497.8 | 779.3 | 0.64 | 0.59 | -1.36 |
| 5,456.0 | 10.59 | 41.22 | 5,389.0 | 605.5 | 503.3 | 787.3 | 0.79 | 0.00 | -4.27 |
| 5,500.0 | 10.46 | 41.50 | 5,432.3 | 611.6 | 508.6 | 795.4 | 0.32 | -0.30 | 0.64 |
| 5,544.0 | 10.30 | 42.20 | 5,475.6 | 617.5 | 513.9 | 803.3 | 0.46 | -0.36 | 1.59 |
| 5,587.0 | 9.80 | 39.40 | 5,517.9 | 623.1 | 518.8 | 810.8 | 1.63 | -1.16 | -6.51 |
| 5,631.0 | 9.00 | 37.80 | 5,561.3 | 628.8 | 523.2 | 818.0 | 1.91 | -1.82 | -3.64 |
| 5,675.0 | 9.00 | 38.50 | 5,604.8 | 634.2 | 527.5 | 824.8 | 0.25 | 0.00 | 1.59 |
| 5,719.0 | 9.00 | 40.12 | 5,648.2 | 639.5 | 531.9 | 831.7 | 0.58 | 0.00 | 3.68 |
| 5,722.4 | 8.99 | 40.35 | 5,651.6 | 639.9 | 532.2 | 832.3 | 1.10 | -0.26 | 6.86 |
| N-23-8-17 TGT | | | | | | | | | |
| 5,762.0 | 8.90 | 43.10 | 5,690.7 | 644.5 | 536.3 | 838.4 | 1.10 | -0.23 | 6.94 |
| 5,806.0 | 9.30 | 43.50 | 5,734.2 | 649.6 | 541.1 | 845.4 | 0.92 | 0.91 | 0.91 |
| 5,850.0 | 9.50 | 43.20 | 5,777.6 | 654.8 | 546.0 | 852.5 | 0.47 | 0.45 | -0.68 |
| 5,893.0 | 9.70 | 38.90 | 5,820.0 | 660.2 | 550.7 | 859.7 | 1.73 | 0.47 | -10.00 |
| 5,937.0 | 10.20 | 33.70 | 5,863.3 | 666.3 | 555.2 | 867.3 | 2.34 | 1.14 | -11.82 |
| 5,981.0 | 10.50 | 33.40 | 5,906.6 | 672.9 | 559.6 | 875.1 | 0.69 | 0.68 | -0.68 |
| 6,026.0 | 9.90 | 40.20 | 5,950.9 | 679.3 | 564.3 | 883.1 | 2.99 | -1.33 | 15.11 |
| 6,069.0 | 8.64 | 40.40 | 5,993.3 | 684.6 | 568.8 | 890.0 | 2.93 | -2.93 | 0.47 |
| 6,112.0 | 8.20 | 39.70 | 6,035.8 | 689.4 | 572.9 | 896.3 | 1.05 | -1.02 | -1.63 |
| 6,156.0 | 8.50 | 41.50 | 6,079.4 | 694.2 | 577.0 | 902.7 | 0.90 | 0.68 | 4.09 |
| 6,200.0 | 9.20 | 47.30 | 6,122.9 | 699.1 | 581.7 | 909.4 | 2.58 | 1.59 | 13.18 |
| 6,244.0 | 9.80 | 47.90 | 6,166.3 | 704.0 | 587.1 | 916.6 | 1.38 | 1.36 | 1.36 |
| 6,288.0 | 10.30 | 47.60 | 6,209.6 | 709.1 | 592.8 | 924.2 | 1.14 | 1.14 | -0.68 |
| 6,331.0 | 9.70 | 47.00 | 6,251.9 | 714.2 | 598.3 | 931.6 | 1.42 | -1.40 | -1.40 |
| 6,375.0 | 8.10 | 47.50 | 6,295.4 | 718.8 | 603.3 | 938.3 | 3.64 | -3.64 | 1.14 |
| 6,419.0 | 7.00 | 47.50 | 6,339.0 | 722.7 | 607.5 | 944.1 | 2.50 | -2.50 | 0.00 |
| 6,463.0 | 6.10 | 46.30 | 6,382.7 | 726.1 | 611.2 | 949.0 | 2.07 | -2.05 | -2.73 |
| 6,507.0 | 6.50 | 41.20 | 6,426.5 | 729.6 | 614.5 | 953.8 | 1.56 | 0.91 | -11.59 |
| 6,551.0 | 5.60 | 41.30 | 6,470.2 | 733.1 | 617.6 | 958.5 | 2.05 | -2.05 | 0.23 |
| 6,594.0 | 4.80 | 41.50 | 6,513.0 | 736.0 | 620.2 | 962.4 | 1.86 | -1.86 | 0.47 |
| 6,638.0 | 4.30 | 40.90 | 6,556.9 | 738.7 | 622.5 | 965.9 | 1.14 | -1.14 | -1.36 |
| 6,682.0 | 4.30 | 40.90 | 6,600.8 | 741.2 | 624.6 | 969.2 | 0.00 | 0.00 | 0.00 |

Checked By: _____ Approved By: _____ Date: _____






Project: USGS Myton SW (UT)
 Site: SECTION 23 T8S, R17E
 Well: N-23-8-17
 Wellbore: Wellbore #1
 Design: Actual



Azimuths to True North
 Magnetic North: 11.38°

Magnetic Field
 Strength: 52384.7nT
 Dip Angle: 65.88°
 Date: 10/4/2010
 Model: IGRF2010

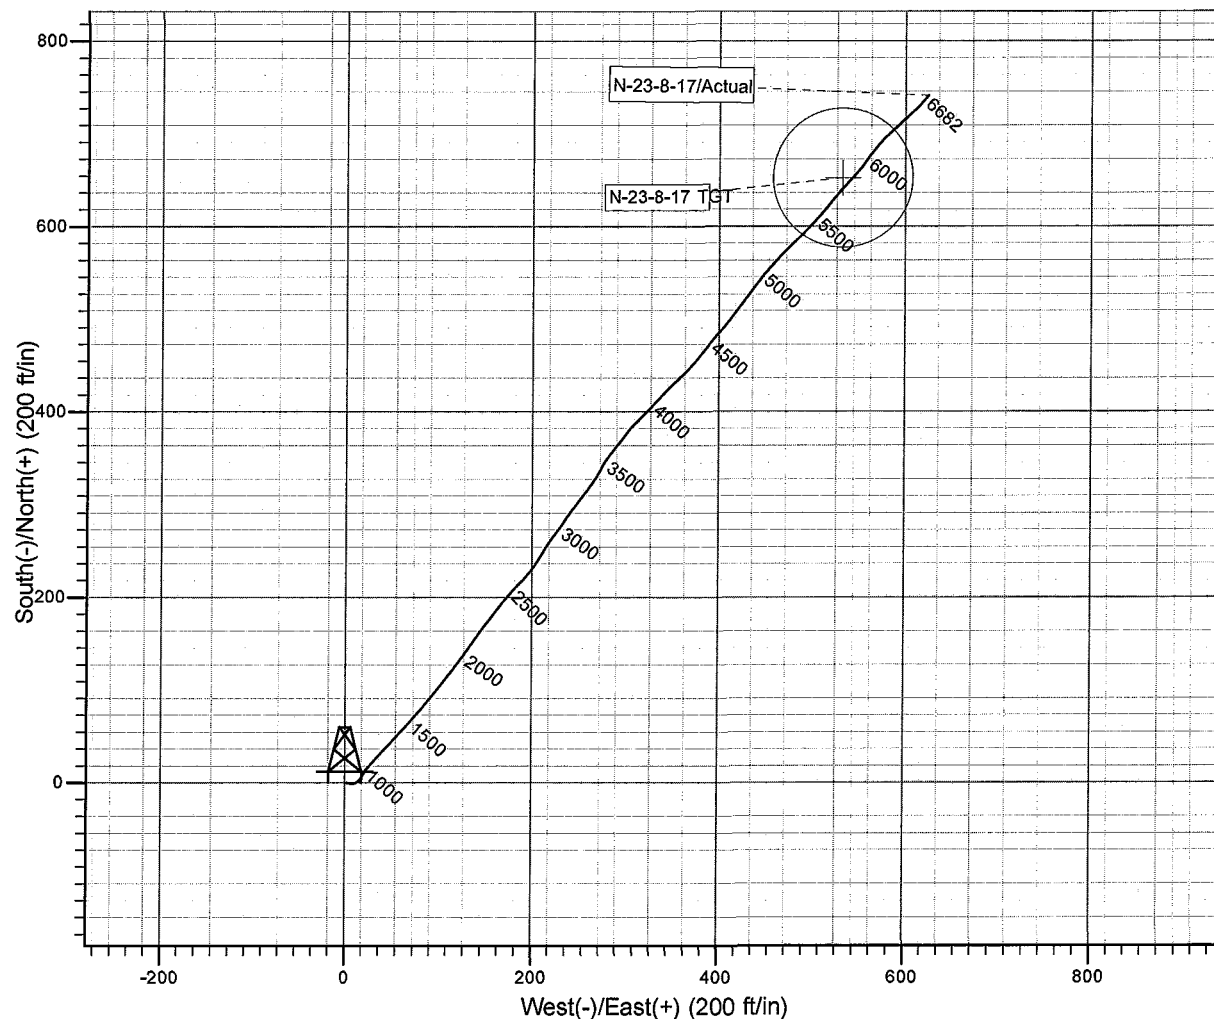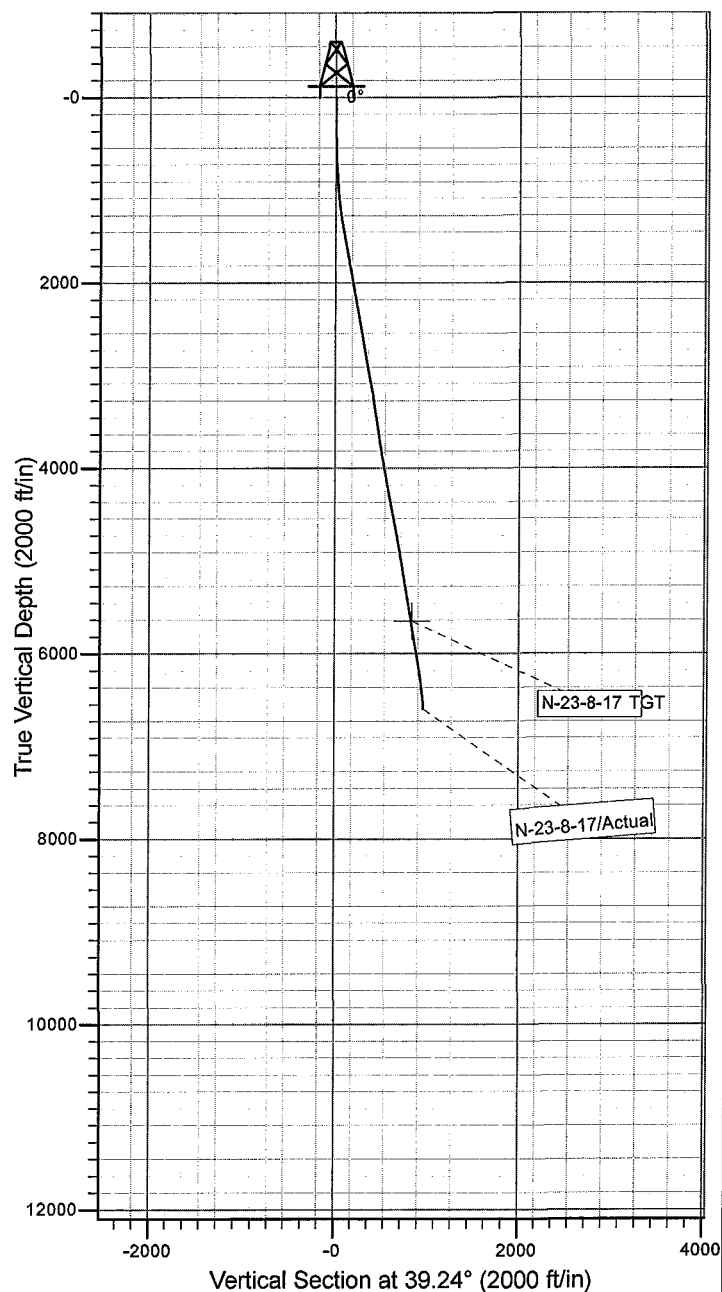

Design: Actual (N-23-8-17/Wellbore #1)

Created By: Sarah Webb

Date: 16:04, May 09 2012

THIS SURVEY IS CORRECT TO THE BEST OF
 MY KNOWLEDGE AND IS SUPPORTED
 BY ACTUAL FIELD DATA