

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL						1. WELL NAME and NUMBER Wilcken 4-23-4-2W					
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>						3. FIELD OR WILDCAT MONUMENT BUTTE					
4. TYPE OF WELL Oil Well Coalbed Methane Well: NO						5. UNIT or COMMUNITIZATION AGREEMENT NAME					
6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY						7. OPERATOR PHONE 435 646-4825					
8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Myton, UT, 84052						9. OPERATOR E-MAIL mcrozier@newfield.com					
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) Fee			11. MINERAL OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>			12. SURFACE OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>					
13. NAME OF SURFACE OWNER (if box 12 = 'fee') Michael D.and Elizabeth Vanderhoof						14. SURFACE OWNER PHONE (if box 12 = 'fee')					
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee') PO Box 715, Oakely, UT 84055						16. SURFACE OWNER E-MAIL (if box 12 = 'fee')					
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')			18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>			19. SLANT VERTICAL <input checked="" type="checkbox"/> DIRECTIONAL <input type="checkbox"/> HORIZONTAL <input type="checkbox"/>					
20. LOCATION OF WELL		FOOTAGES		QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN			
LOCATION AT SURFACE		423 FNL 543 FWL		NWNW	23	4.0 S	2.0 W	U			
Top of Uppermost Producing Zone		423 FNL 543 FWL		NWNW	23	4.0 S	2.0 W	U			
At Total Depth		423 FNL 543 FWL		NWNW	23	4.0 S	2.0 W	U			
21. COUNTY DUCHESNE			22. DISTANCE TO NEAREST LEASE LINE (Feet) 423			23. NUMBER OF ACRES IN DRILLING UNIT 40					
			25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 1320			26. PROPOSED DEPTH MD: 7165 TVD: 7165					
27. ELEVATION - GROUND LEVEL 5287			28. BOND NUMBER B001834			29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 437478					
Hole, Casing, and Cement Information											
String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement	Sacks	Yield	Weight	
Surf	12.25	8.625	0 - 500	24.0	J-55 ST&C	8.3	Class G	229	1.17	15.8	
Prod	7.875	5.5	0 - 7165	15.5	J-55 LT&C	8.3	Premium Lite High Strength	357	3.26	11.0	
							50/50 Poz	363	1.24	14.3	
ATTACHMENTS											
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES											
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER						<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN					
<input checked="" type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)						<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER					
<input type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)						<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP					
NAME Mandie Crozier				TITLE Regulatory Tech				PHONE 435 646-4825			
SIGNATURE				DATE 02/23/2011				EMAIL mcrozier@newfield.com			
API NUMBER ASSIGNED 43013506080000				APPROVAL				 Permit Manager			

NEWFIELD PRODUCTION COMPANY
 WILCKEN 4-23-4-2W
 NW/NW SECTION 23, T4S, R2W
 DUCHESNE COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0' – 1,960'
Green River	1,960'
Wasatch	6,890'
Proposed TD	7,165'

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil)	1,960' – 6,890'
-----------------------------	-----------------

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO ₃) (mg/l)
Dissolved Bicarbonate (NaHCO ₃) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO ₄) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. **Casing Design: Wilcken 4-23-4-2W**

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	500'	24.0	J-55	STC	2,950 10.52	1,370 8.61	244,000 20.33
Prod casing 5-1/2"	0'	7,165'	15.5	J-55	LTC	4,810 2.11	4,040 1.77	217,000 1.95

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg
 Pore pressure at surface casing shoe = 8.33 ppg
 Pore pressure at prod casing shoe = 8.33 ppg
 Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. **Cementing Design: Wilcken 4-23-4-2W**

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft ³ /sk)
			ft ³			
Surface casing	500'	Class G w/ 2% CaCl	229 268	30%	15.8	1.17
Prod casing Lead	5,165'	Prem Lite II w/ 10% gel + 3% KCl	357 1163	30%	11.0	3.26
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363 451	30%	14.3	1.24

- *Actual volume pumped will be 15% over the caliper log
 - Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
 - Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ± 500 feet will be drilled with an air/mist system. The air rig is equipped with a 6 1/2" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ± 400 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will visually monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 500' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the third quarter of 2011, and take approximately seven (7) days from spud to rig release.

CONFIDENTIAL

T4S, R2W, U.S.B.&M.

NEWFIELD EXPLORATION COMPANY


Plastic Cap
marked
Peatross 15566
on 5/8" Rebar

N89°58'W - 80.14 (G.L.O.)

S88°56'10"W - 2639.19' (Meas.)

S88°50'59"W - 2659.49' (Meas.)


WELL LOCATION, 4-23-4-2W, LOCATED AS SHOWN IN THE NW 1/4 NW 1/4 OF SECTION 23, T4S, R2W, U.S.B.&M. DUCHESNE COUNTY, UTAH.

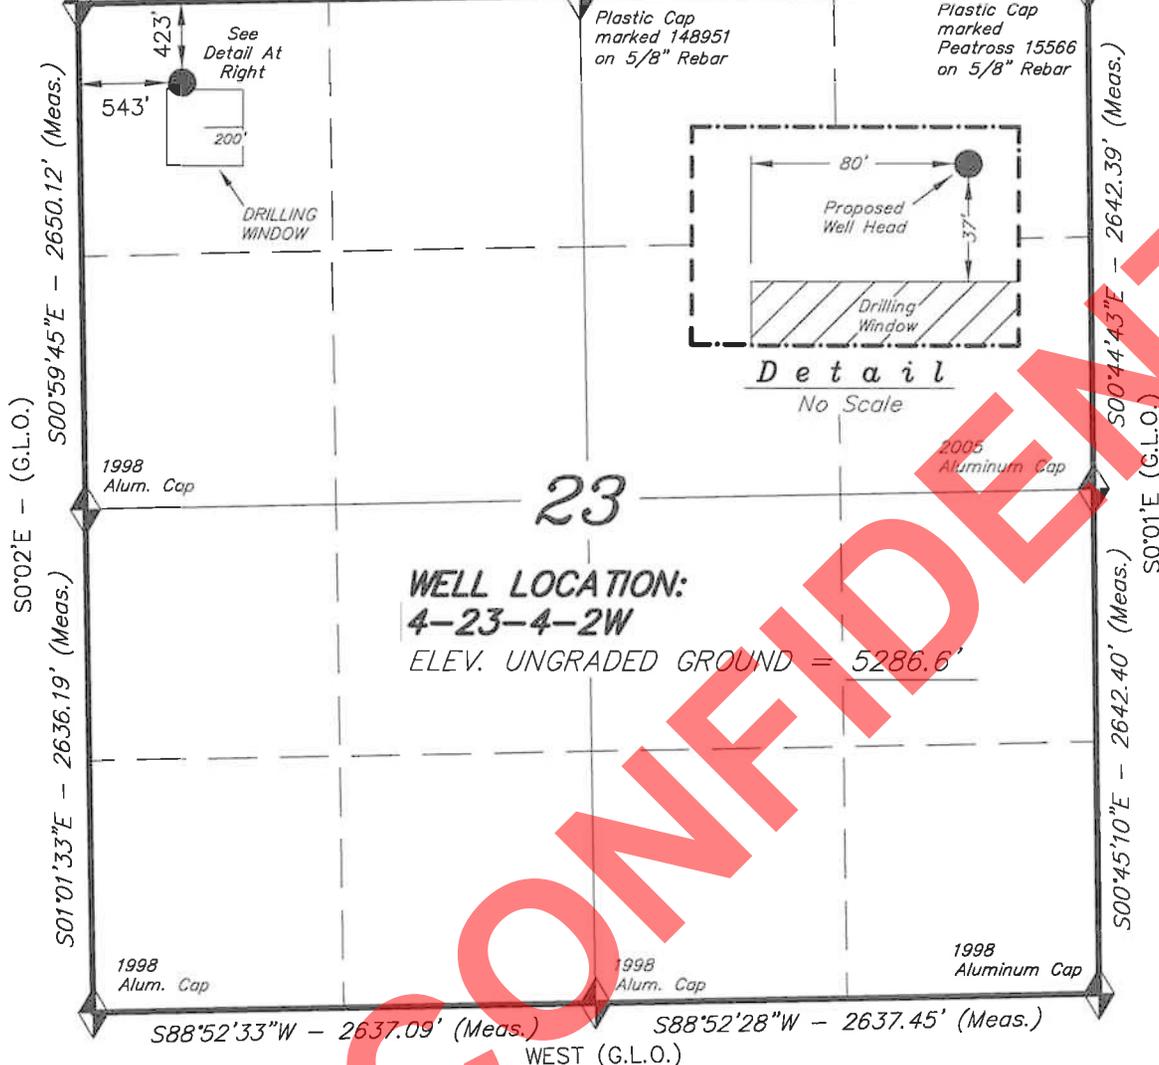

NOTES:

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. 189377

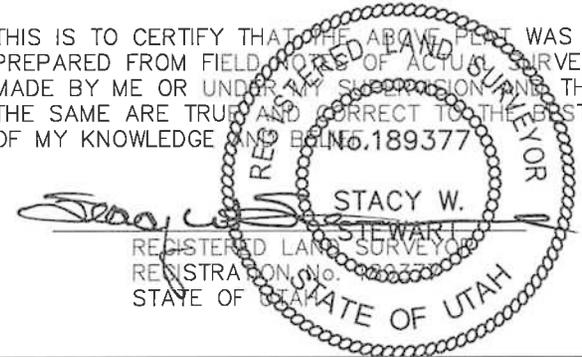

◆ = SECTION CORNERS LOCATED WEST (G.L.O.)


BASIS OF ELEV; Elevations are base on LOCATION: an N.G.S. OPUS Correction. LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

4-23-4-2W
(Surface Location) NAD 83
LATITUDE = 40° 07' 35.71"
LONGITUDE = 110° 05' 02.51"

TRI STATE LAND SURVEYING & CONSULTING
180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501

DATE SURVEYED: 10-14-10	SURVEYED BY: C.D.S.
DATE DRAWN: 10-21-10	DRAWN BY: F.T.M.
REVISED:	SCALE: 1" = 1000'

Access Road Map

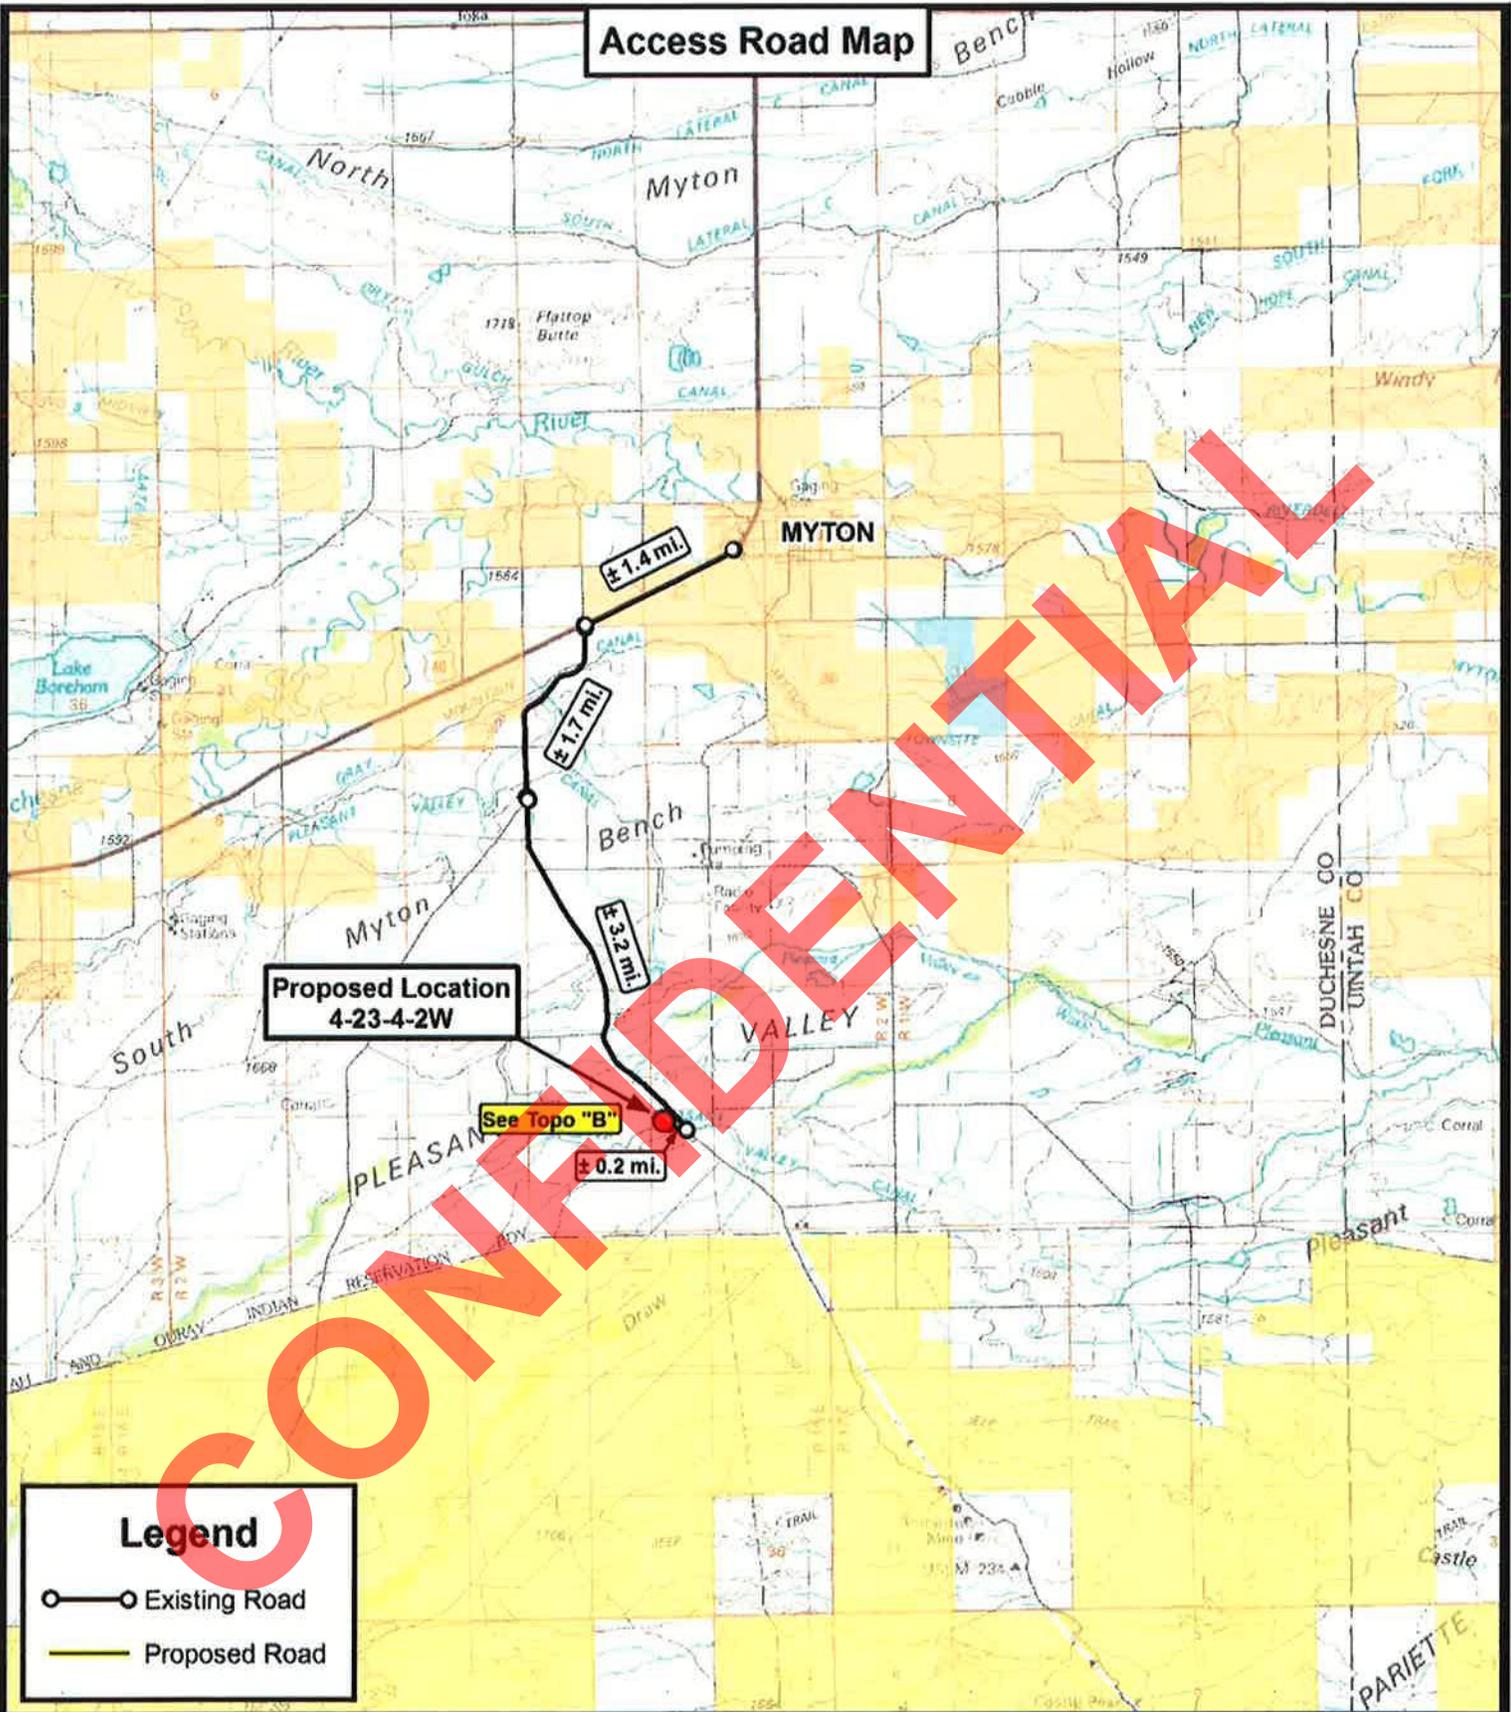

Legend

- Existing Road
- Proposed Road

Tri State
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
 F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY


4-23-4-2W
 SEC. 23, T4S, R2W, U.S.B.&M.
 Duchesne County, UT.

DRAWN BY:	C.H.M.
DATE:	10-26-2010
SCALE:	1:100,000

TOPOGRAPHIC MAP

SHEET
A

Access Road Map

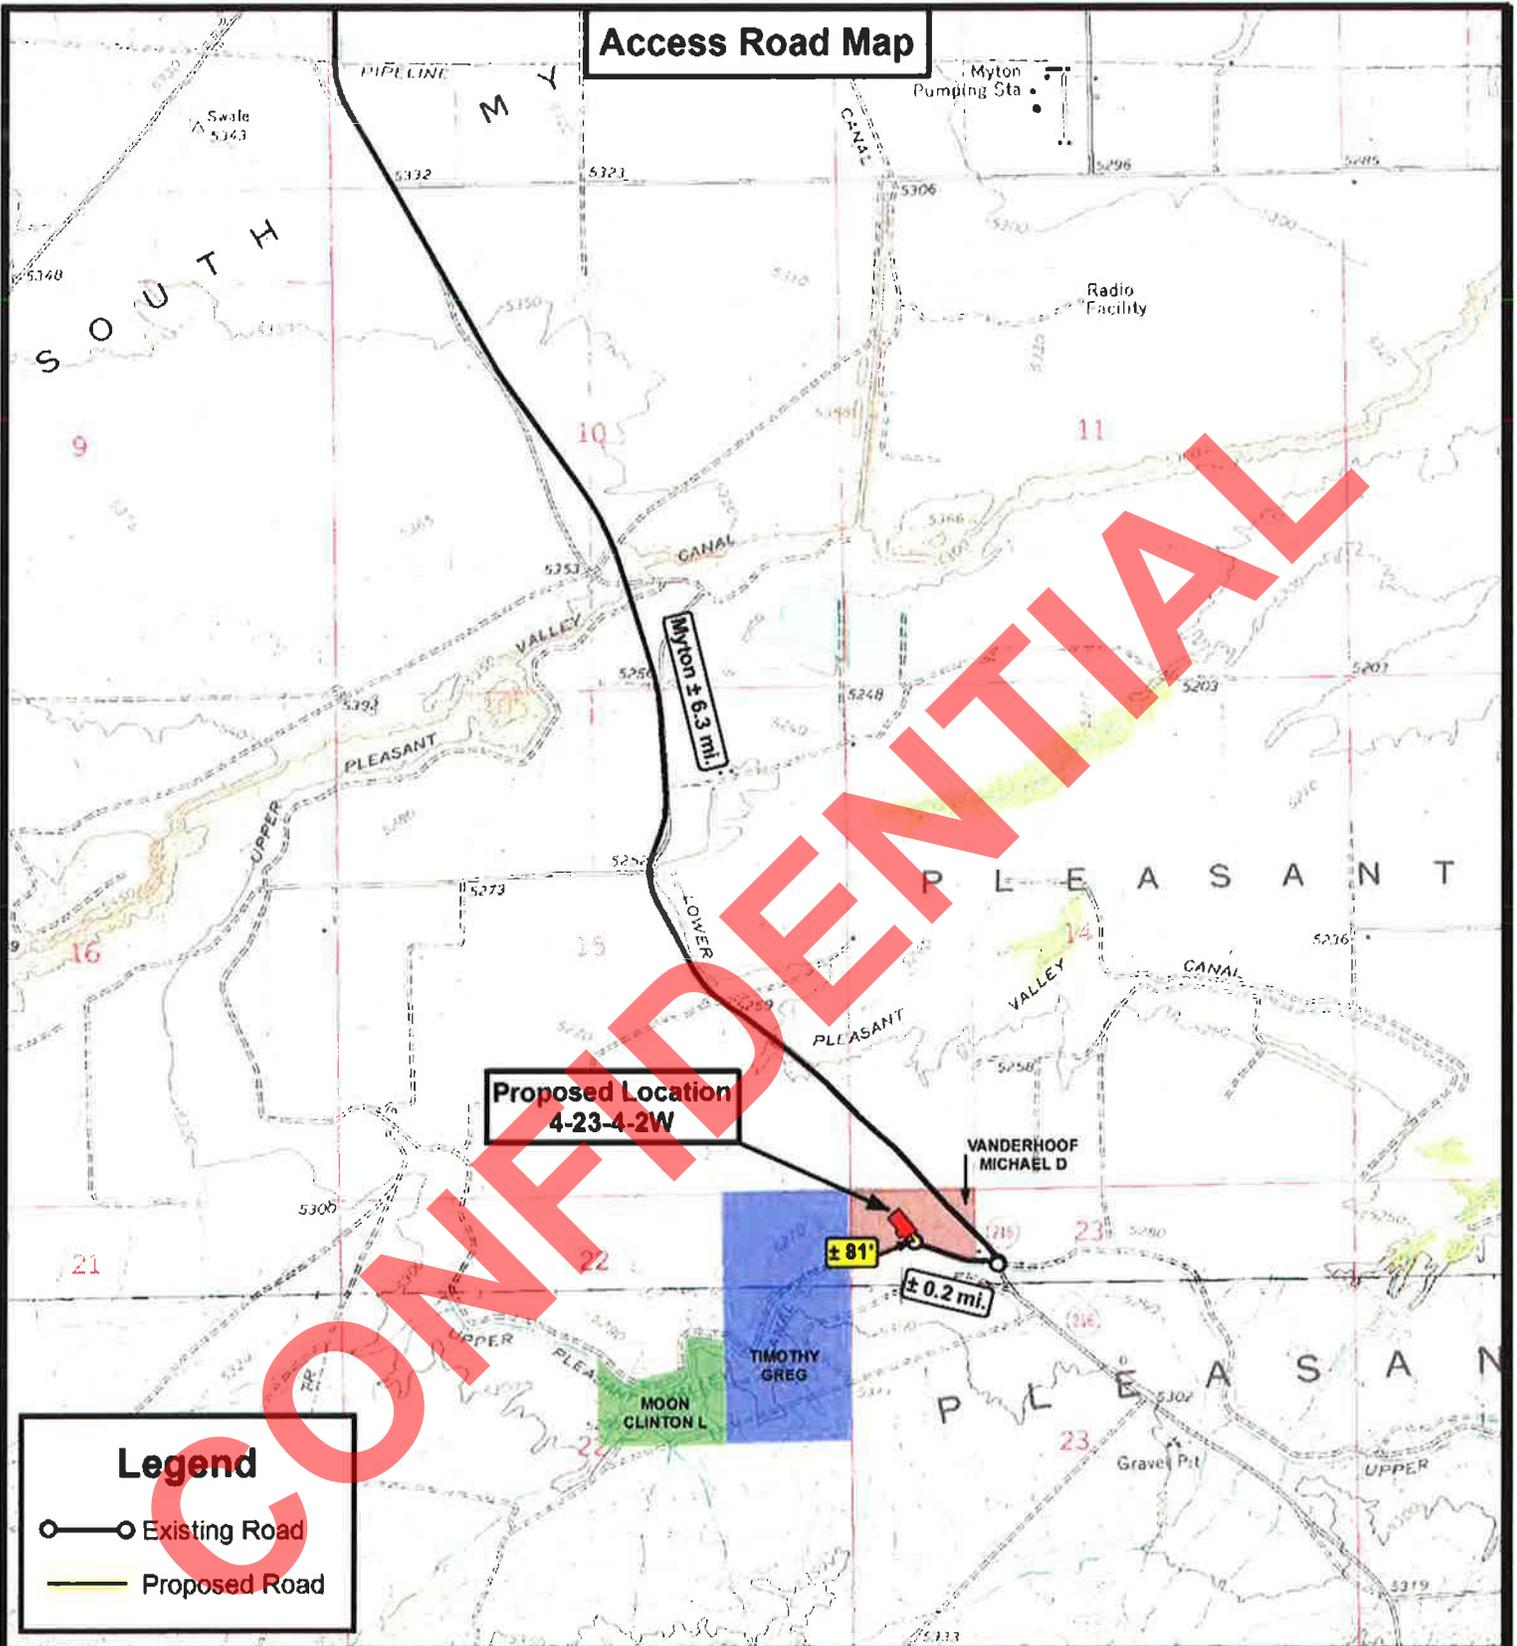

**Proposed Location
4-23-4-2W**

VANDERHOOF
MICHAEL D

± 81'

± 0.2 mi.

Legend

- Existing Road
- Proposed Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

**Tri State
Land Surveying, Inc.**
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY


**4-23-4-2W
SEC. 23, T4S, R2W, U.S.B.&M.
Duchesne County, UT.**

DRAWN BY: C.H.M.
DATE: 10-26-2010
SCALE: 1" = 2,000'

TOPOGRAPHIC MAP

SHEET
B

Proposed Pipeline Map

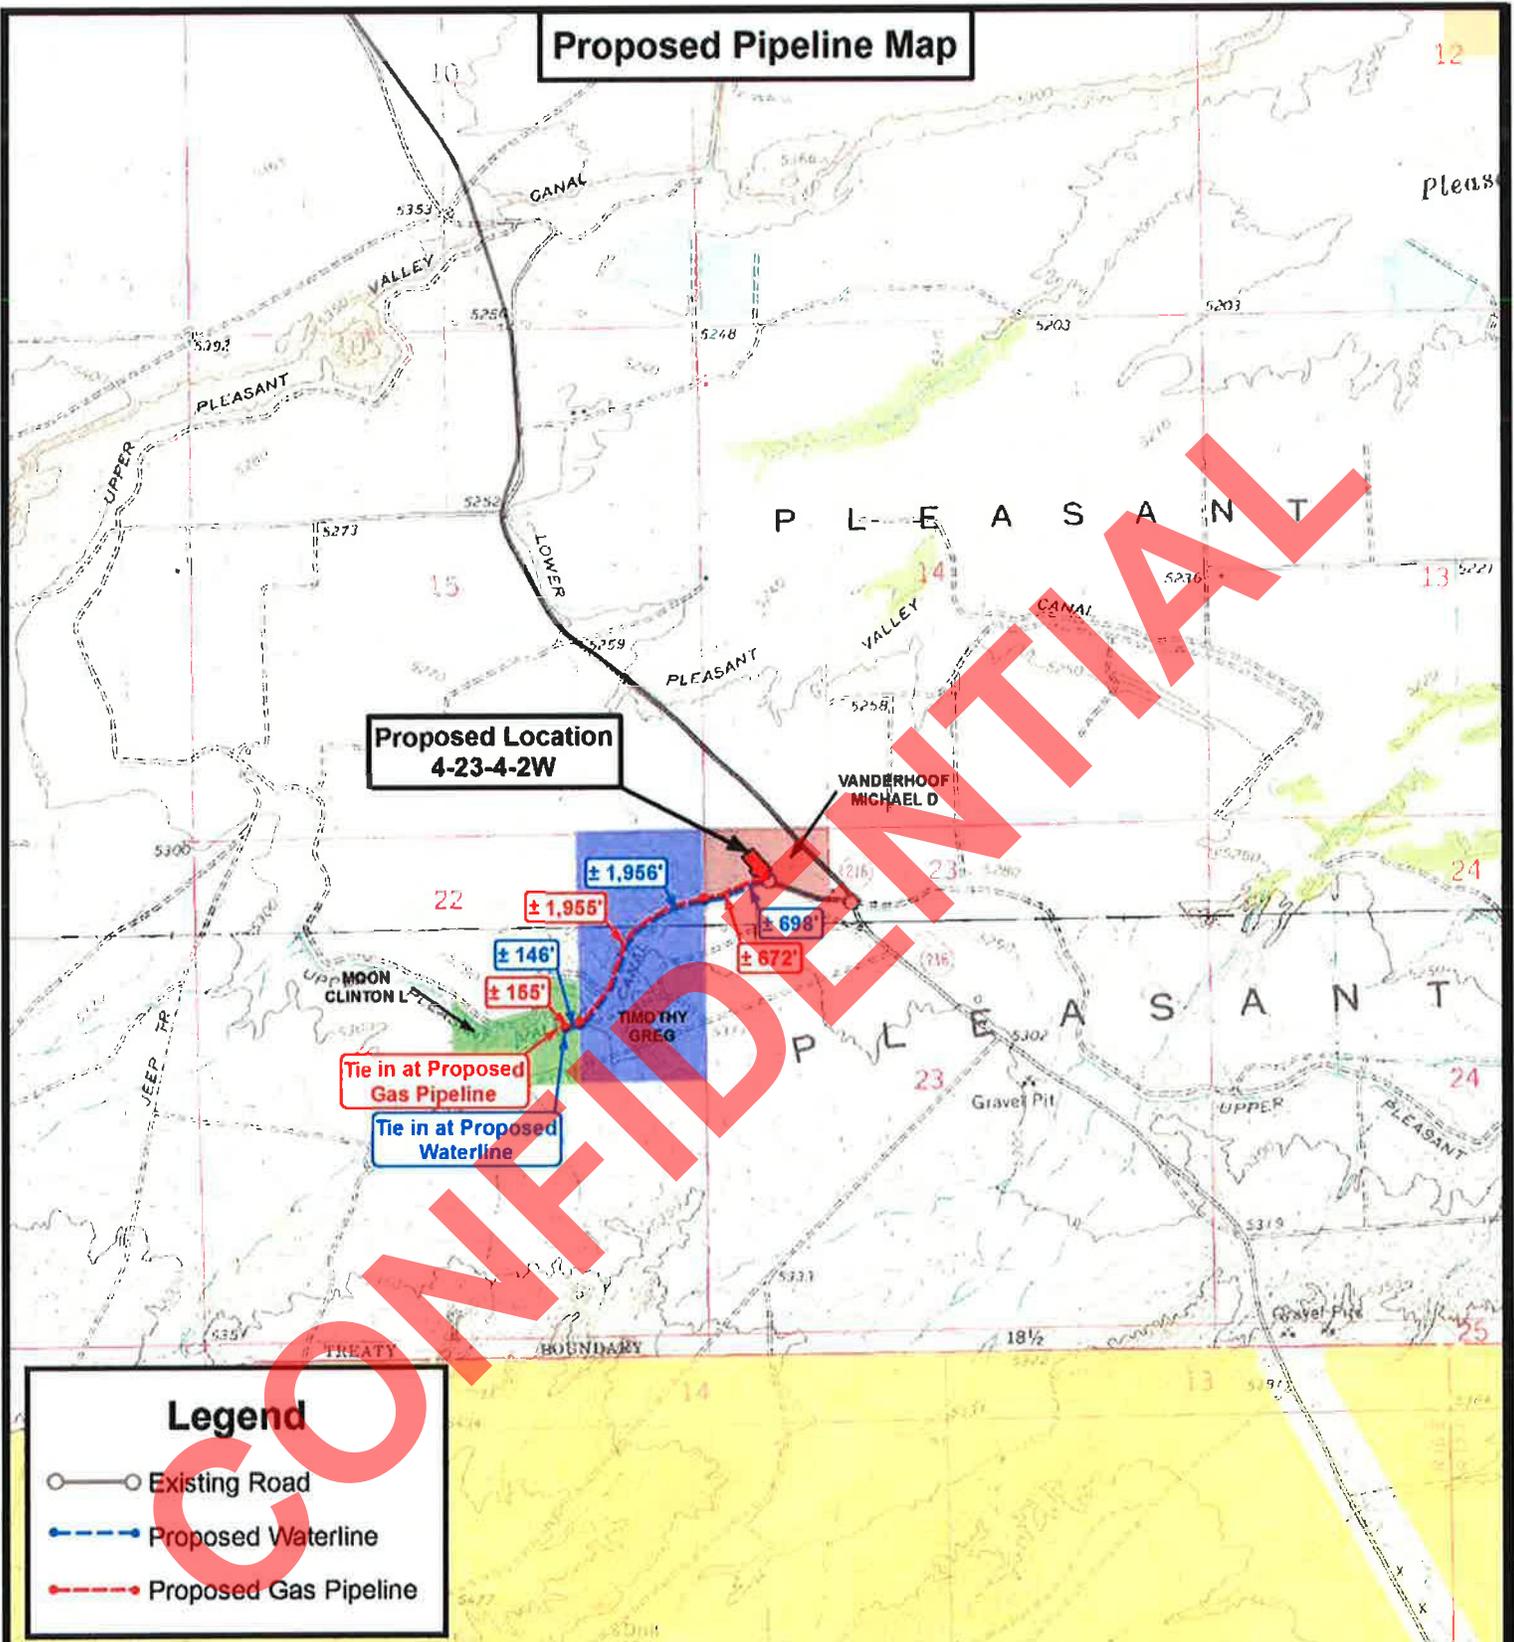

**Proposed Location
4-23-4-2W**

**Tie in at Proposed
Gas Pipeline**

**Tie in at Proposed
Waterline**

Legend

- Existing Road
- Proposed Waterline
- Proposed Gas Pipeline

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

**Tri State
Land Surveying, Inc.**
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY


**4-23-4-2W
SEC. 23, T4S, R2W, U.S.B.&M.
Duchesne County, UT.**

DRAWN BY:	C.H.M.
DATE:	10-26-2010
SCALE:	1" = 2,000'

TOPOGRAPHIC MAP

SHEET
C

Exhibit "B" Map

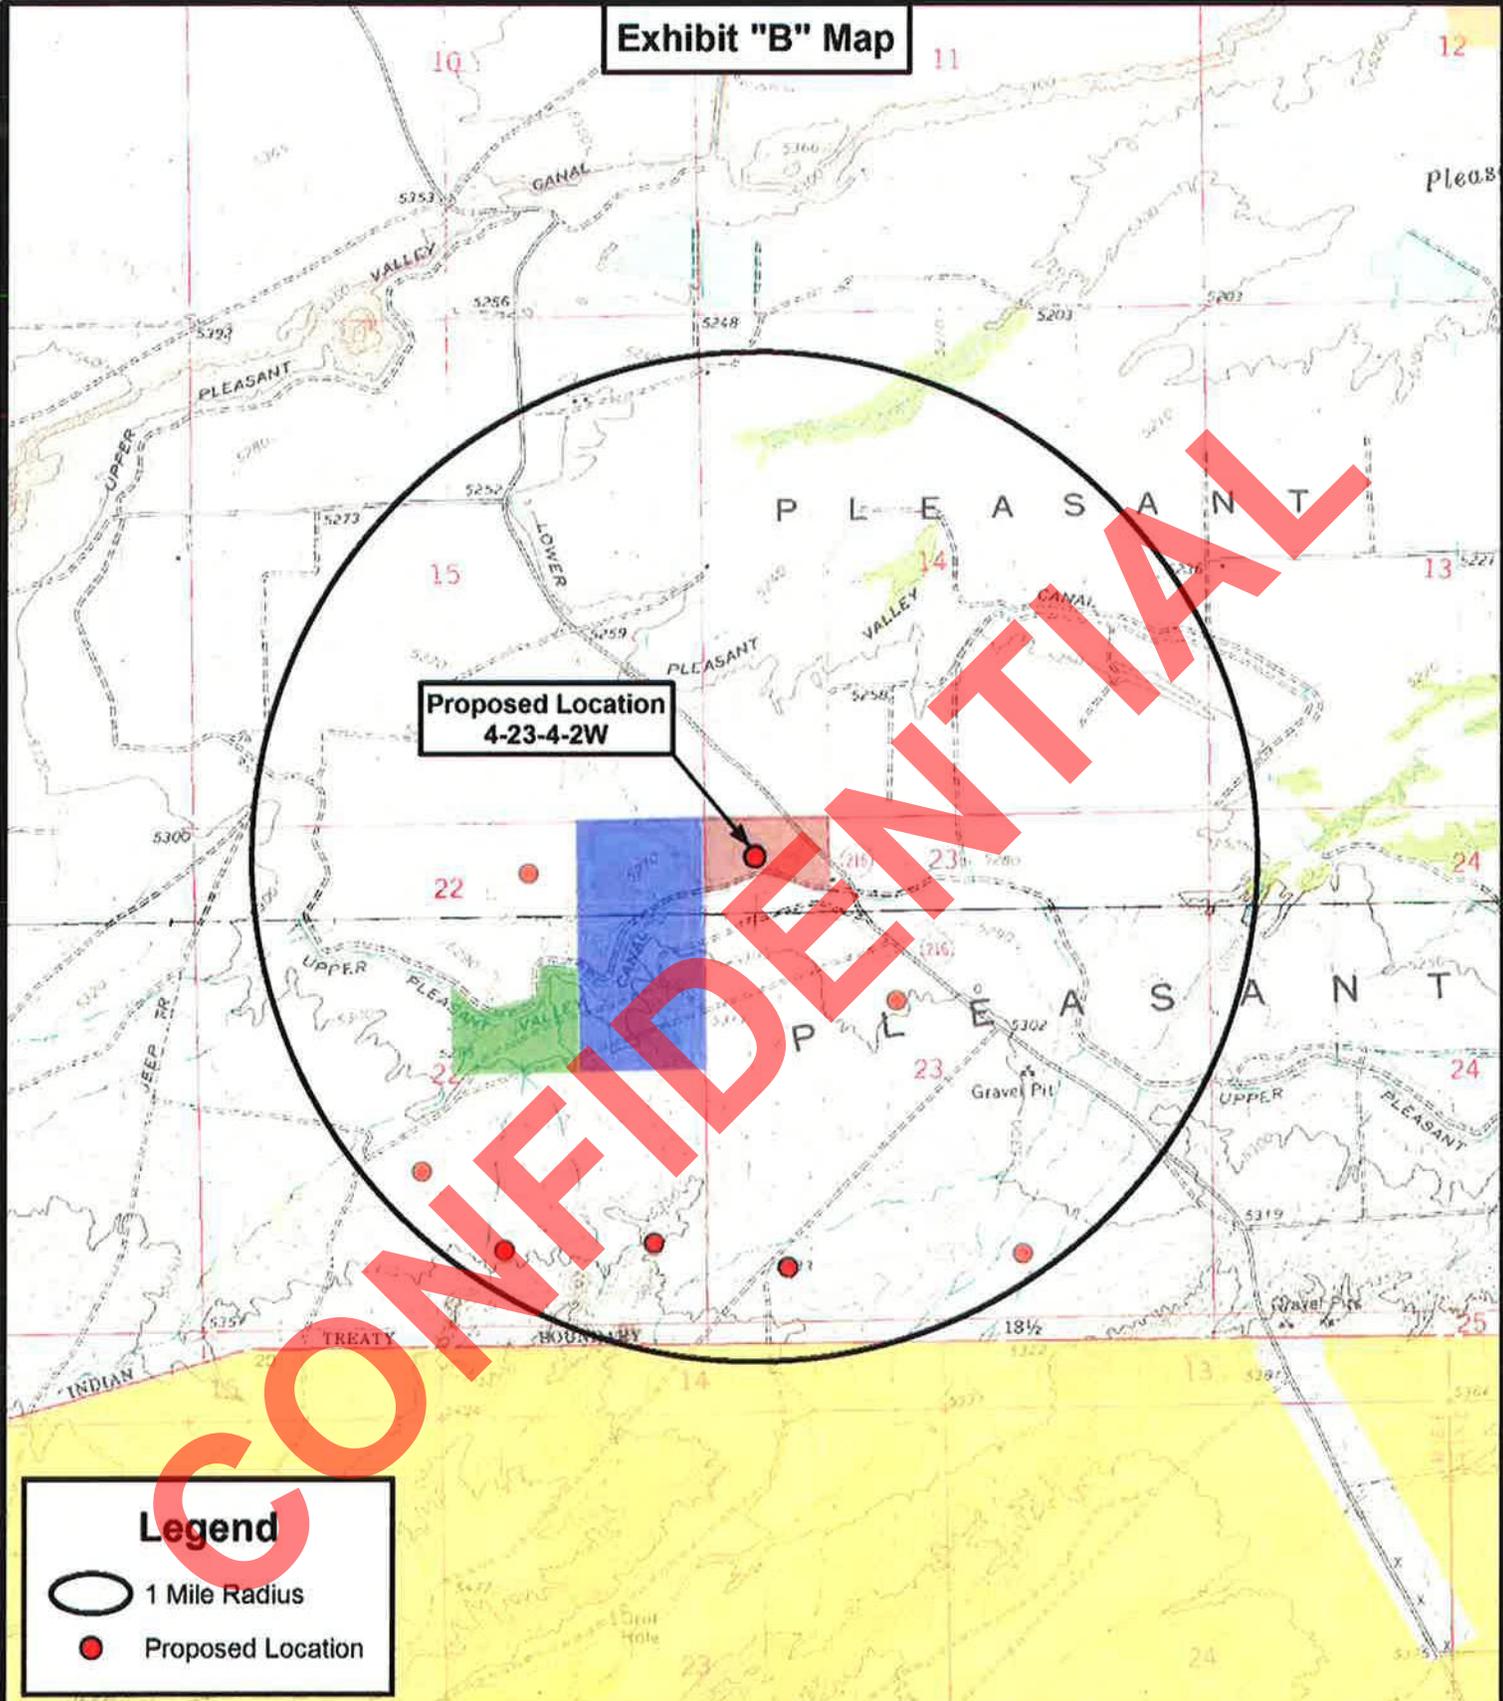

**Proposed Location
4-23-4-2W**

Legend

- 1 Mile Radius
- Proposed Location

**Tri State
Land Surveying, Inc.**
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

**4-23-4-2W
SEC. 23, T4S, R2W, U.S.B.&M.
Duchesne County, UT.**

DRAWN BY:	C.H.M.
DATE:	10-26-2010
SCALE:	1" = 2,000'

TOPOGRAPHIC MAP

SHEET
D

MEMORANDUM
of
EASEMENT, RIGHT-OF-WAY
and
SURFACE USE AGREEMENT

This Easement, Right-of-Way and Surface Use Agreement ("Agreement") is entered into this 30th day of August 2010 by and between, **Michael D. and Elizabeth Vanderhoof, whose address is PO Box 715, Oakley, Utah 84055** ("Surface Owner," whether one or more) and Newfield Production Company, a Texas corporation ("NEWFIELD"), with offices at 1001 Seventeenth Street, Suite 2000, Denver, Colorado 80202, covering certain lands, (the "Lands") situated in Duchesne County, Utah described as follows:

Township 4 South, Range 2 West

Section 23:

Beginning at the NW corner of NWNW; thence E 1320 ft; thence S to centerline of Uinta Basin Irrigation canal; thence Westerly along centerline to W boundary; thence N along W boundary line to point of beginning. 17.36 acres

Section 24:

Lots 1 & 2; Except: Beginning W4 corner; thence N 89°06'17" E 1327.75 ft to NE corner of NWSW; thence S 00°41'47" E 1314.22 ft to NE corner of SWSW; thence S 00°41'47" E 324 ft more or less to N ROW line of county road; thence Westerly 899 ft more or less along said ROW line to E line of Toquer 1 and 2 mineral claim; thence N 29°54'24" W 880 ft more or less; thence N 00°45'04" W 928.85 ft to beginning. 13.88 acres

Duchesne County, Utah
being 31.24 acres more or less.

For and in consideration of the sum of ten dollars (\$10.00), and other valuable consideration, the receipt and sufficiency of which are hereby acknowledged, the undersigned hereby agree to the terms and provisions set forth as follows:

1. Compensation for Well; Release of All Claims

NEWFIELD shall pay to Surface Owner the sum as set forth in and according to the terms of that certain Letter Agreement for Easement, Right-of Way and Surface Use by and between Surface Owner and NEWFIELD, dated August 30, 2010, as full payment and satisfaction for any and all detriment, depreciation, injury or damage of any nature to the Lands or growing crops thereon that may occur as a result of NEWFIELD's drilling or completion operations or its continuing activities for the production or transportation of oil, gas, or other hydrocarbons or products associated with the foregoing including, but not limited to, surface use, access, pipelines, gathering lines, pipeline interconnections, and any and all other reasonable or customary uses of land related to said operations or activities.

2. Grant of Right of Way and Easement

Surface Owner hereby grants, bargains, leases, assigns, and conveys to NEWFIELD an easement and right-of-way for the purpose of construction, using and maintaining access roads, locations for surface equipment and subsurface gathering lines for each well drilled upon the Lands, pipelines, and pipeline interconnections for two years from date of this agreement and so long thereafter as NEWFIELD's oil and gas leases remain in effect.

This Agreement shall be binding upon the respective heirs, executors, administrators, successors, and assigns of the undersigned.

These Parties hereto have executed this document effective as of the day first above written.

MICHAEL D. AND ELIZABETH VANDERHOOF

NEWFIELD PRODUCTION COMPANY

By: 
Michael D. Vanderhoof, Private Surface Owner

By: 
Dan Shewmake,
Vice President-Development

By: 
Elizabeth Vanderhoof, Private Surface Owner

COPY

STATE OF UTAH)
)
)ss
COUNTY OF Summit)

This instrument was acknowledged before me this 30th day of August, 2010 by **Michael D. and Elizabeth Vanderhoof, Private Surface Owners.**

Witness my hand and official seal.

My commission expires 9/8/2013

[Signature]
Notary Public




STATE OF COLORADO)
)
)ss
COUNTY OF DENVER)

This instrument was acknowledged before me this 11th day of Oct, 2010 by **Dan Shewmake, Vice President-Development a Texas corporation, on behalf of the corporation.**

Witness my hand and official seal.

My commission expires _____

[Signature]
Notary Public



CONFIDENTIAL

NEWFIELD PRODUCTION COMPANY
WILCKEN 4-23-4-2W
NW/NW SECTION 23, T4S, R2W
DUCHESNE COUNTY, UTAH

THIRTEEN POINT SURFACE PROGRAM

1. **EXISTING ROADS**

See attached **Topographic Map "A"**

To reach Newfield Production Company well location site Wilcken 4-23-4-2W located in the NW¼ NW¼ Section 23, T4S, R2W, S.L.B. & M., Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.4 miles ± to the junction of this highway and UT State Hwy 53; proceed in a southeasterly direction approximately 4.9 miles to it's junction with an existing road to the northwest; proceed in a northwesterly direction approximately 0.2 miles to it's junction with the beginning of the proposed access road; proceed - 81' ± to the proposed well location.

The highways mentioned in the foregoing paragraph are bituminous surfaced roads to the point where Highway 216 exists to the South, thereafter the roads are constructed with existing materials and gravel. The highways are maintained by Utah State road crews. All other roads are maintained by County crews.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal.

2. **PLANNED ACCESS ROAD**

Approximately 81' of access road is proposed. See attached **Topographic Map "B"**.

The proposed access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%.

There will be no culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. **LOCATION OF EXISTING WELLS**

Refer to **EXHIBIT B**.

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck for drilling purposes from the following water sources:

Johnson Water District
Water Right: 43-7478

Neil Moon Pond
Water Right: 43-11787

Newfield Collector Well
Water Right: 47-1817 (A30414DVA, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. A 16 mil liner with felt will be required. Newfield requests approval that a flare pit be constructed and utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E) or at State of Utah approved surface disposal facilities.

8. **ANCILLARY FACILITIES:**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT:**

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

10. **PLANS FOR RESTORATION OF SURFACE:**

a) **Producing Location**

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather

permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

b) **Dry Hole Abandoned Location**

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP:** Michael D. and Elizabeth Vanderhoof.
 See attached Memorandum of Surface Use Agreement.

12. **OTHER ADDITIONAL INFORMATION:**

Newfield Production Company requests 81' of planned access road to be granted. **Refer to Topographic Map "B"**. Newfield Production Company requests 2,782' of surface gas line to be granted. Newfield Production Company requests 2,800' of buried water line to be granted.

It is proposed that the disturbed area will be 60' wide to allow for construction of the proposed access road, a 10" or smaller gas gathering line, a 3" poly fuel gas line, a buried 3" steel water injection line and a buried 3" poly water return line. The planned access road will consist of a 18' permanent running surface (9' either side of the centerline) crowned and ditched in order to handle any run-off from any precipitation events that are prevalent to this area. The maximum grade will be less than 8%. There will be no culverts required along this access road. There will be turnouts as needed along this road to allow for increases in potential traffic issues. There are no fences encountered along this proposed road. There will be no new gates or cattle guards required. All construction material for this access road will be borrowed material accumulated during construction of the access road.

Both the proposed surface gas and buried water lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."** The proposed water pipelines will be buried in a 4-5' deep trench constructed with a trencher or backhoe for the length of the proposal. The equipment will run on the surface and not be flat bladed to minimize surface impacts to precious topsoil in these High Desert environments. If possible, all proposed surface gas pipelines will be installed on the same side of the road as existing gas lines. The construction phase of the planned access road, proposed gas lines and proposed water lines will last approximately (5) days.

In the event that the proposed well is converted to a water injection well, a Sundry Notice form will be applied for through the State of Utah DOGM.

- a) Newfield Production Company is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, Newfield is to immediately stop work that might further disturb such materials and contact the Authorized Officer.
- b) Newfield Production will control noxious weeds along rights-of-way for roads, pipelines, well sites or other applicable facilities. On State administered land it is required that a Pesticide Use Proposal shall be submitted and given approval prior to the application of herbicides or other possible hazardous chemicals.
- c) Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on State Lands after the conclusion of drilling operations or at any other

time without State authorization. However, if State authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the Wilcken 4-23-4-2W, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the Wilcken 4-23-4-2W Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

The State office shall be notified upon site completion prior to moving on the drilling rig.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**
Representative

Name: Tim Eaton
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification

Please be advised that Newfield Production Company is considered to be the operator of well #4-23-4-2W, NW/NW Section 23, T4S, R2W, Duchesne County, Utah and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by Bond #B001834.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

2/23/11
Date


Mandie Crozier
Regulatory Specialist
Newfield Production Company

2-M SYSTEM

Blowout Prevention Equipment Systems

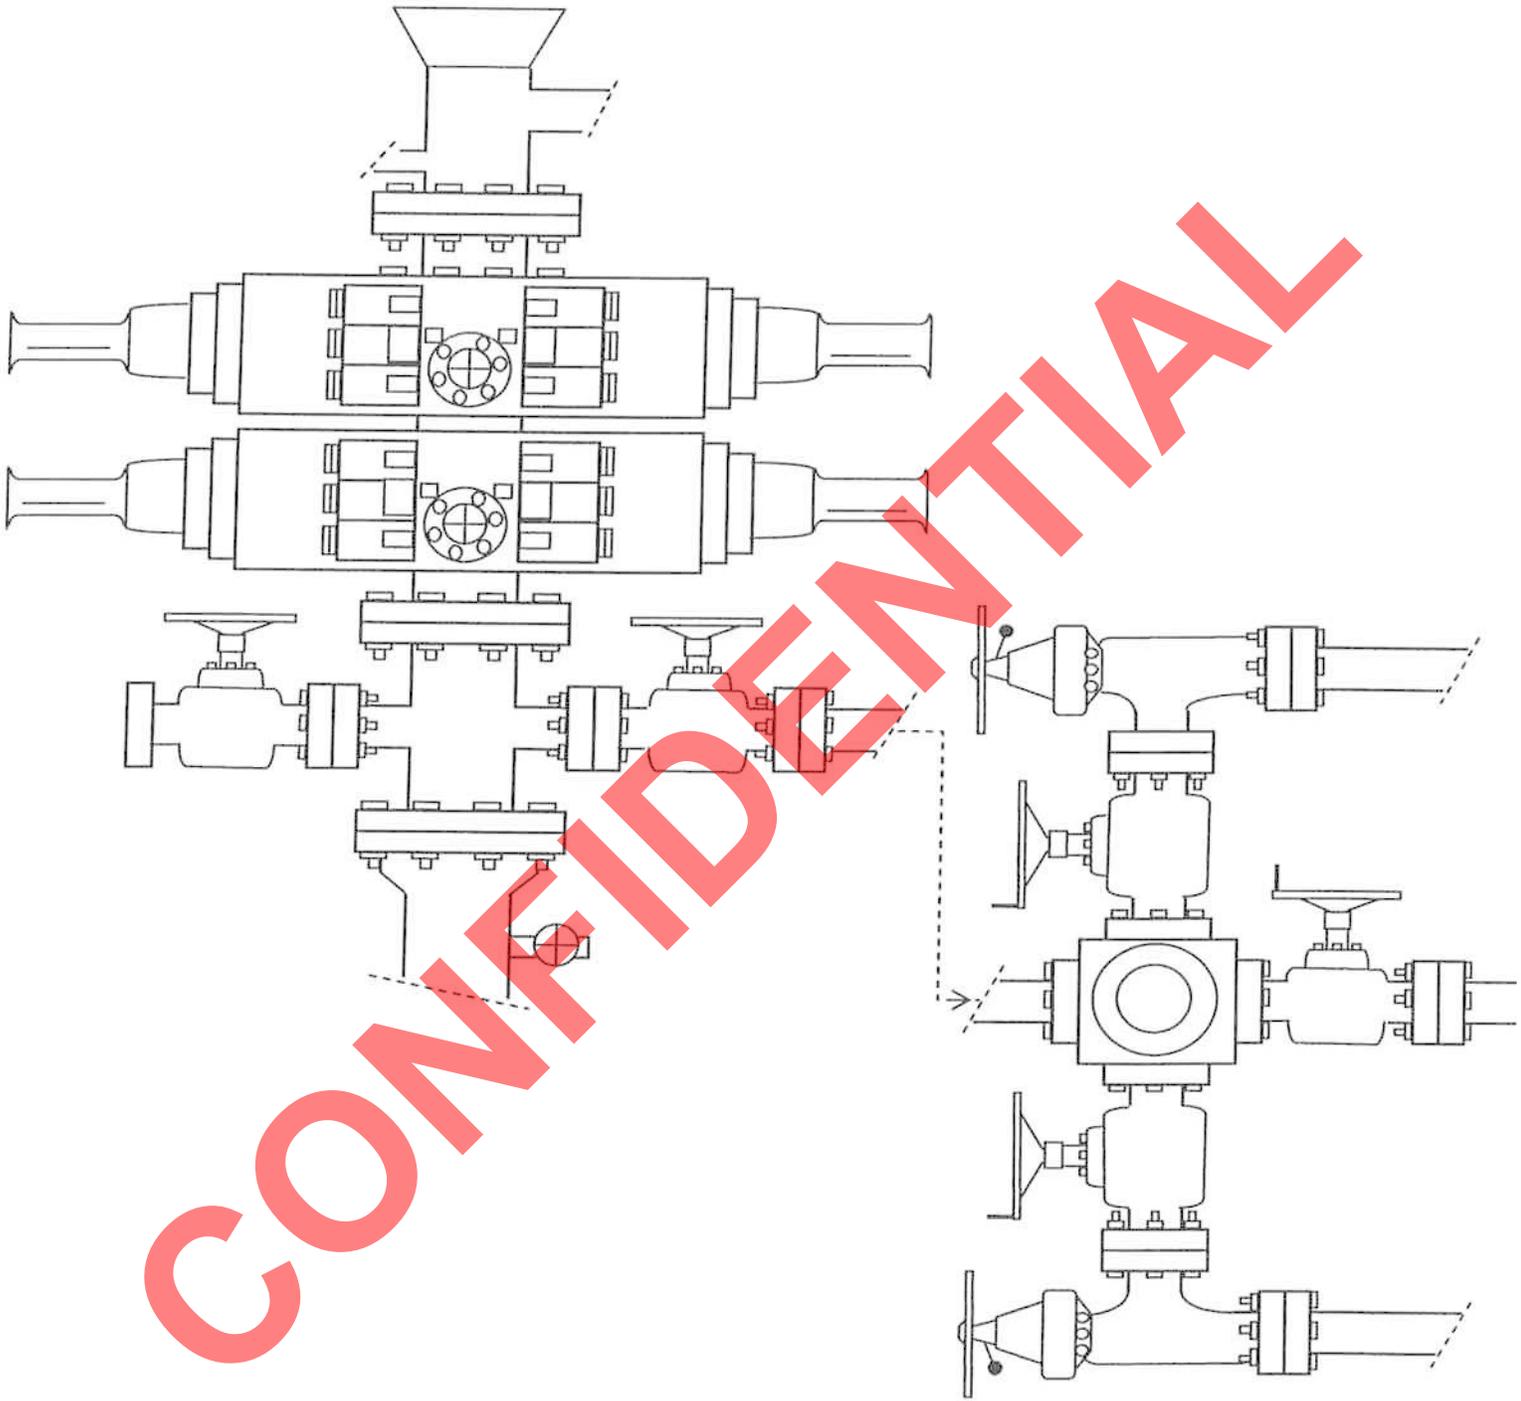


EXHIBIT C

NEWFIELD



Route #3 Box 3630
Myton, Utah 84052
(435) 646-4825, FAX: (435) 646-3031

February 23, 2011

State of Utah
Division of Oil, Gas & Mining
Attn: Diana Mason
1594 West North Temple - Suite 1210
P.O. Box 145801
Salt Lake City, Utah 84114-5801

RE: Application for Permit to Drill
Wilcken 4-23-4-2W

Dear Diana:

The above mentioned location is an **Exception Location**. Our Land Department will send you the required exception location letter. If you have any questions, feel free to give either Tim Eaton or myself a call.

Sincerely,



Mandie Crozier
Regulatory Specialist

NEWFIELD EXPLORATION COMPANY

LOCATION LAYOUT

4-23-4-2W

Pad Location: NWNW Section 23, T4S, R2W, U.S.B.&M.

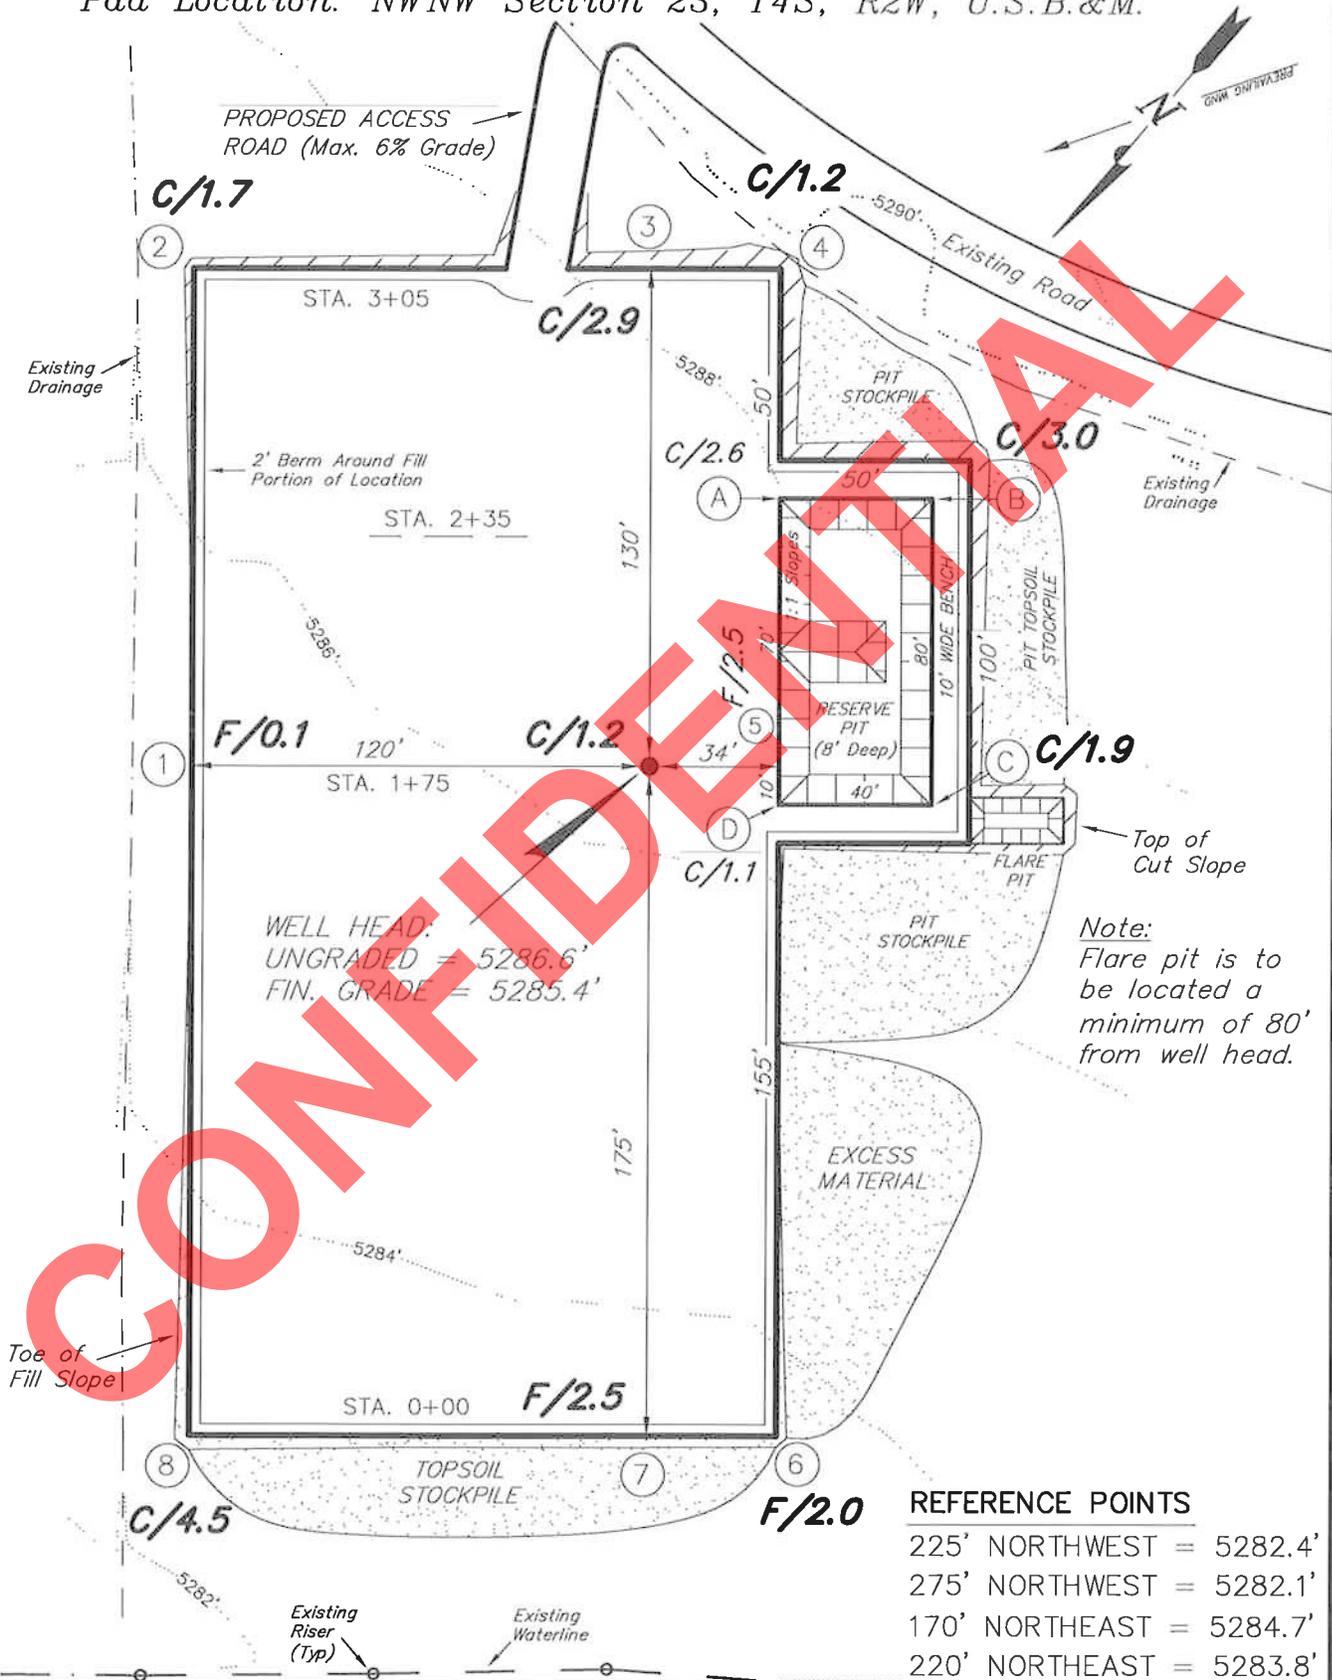

CONFIDENTIAL

SURVEYED BY: C.D.S.	DATE SURVEYED: 10-14-10
DRAWN BY: F.T.M.	DATE DRAWN: 10-21-10
SCALE: 1" = 50'	REVISED:





Tri State (435) 781-2501
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD EXPLORATION COMPANY

CROSS SECTIONS

4-23-4-2W

Pad Location: NWNW Section 23, T4S, R2W, U.S.B.&M.

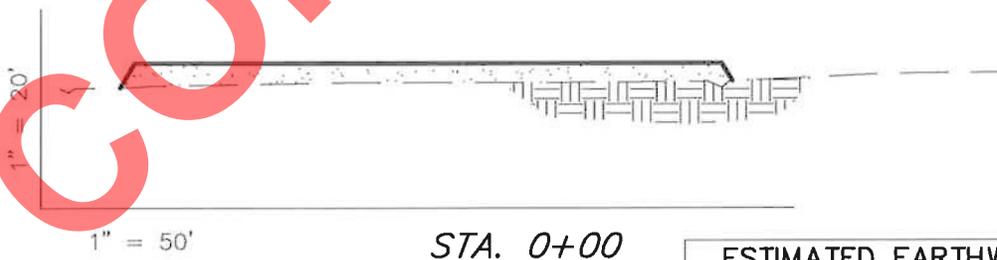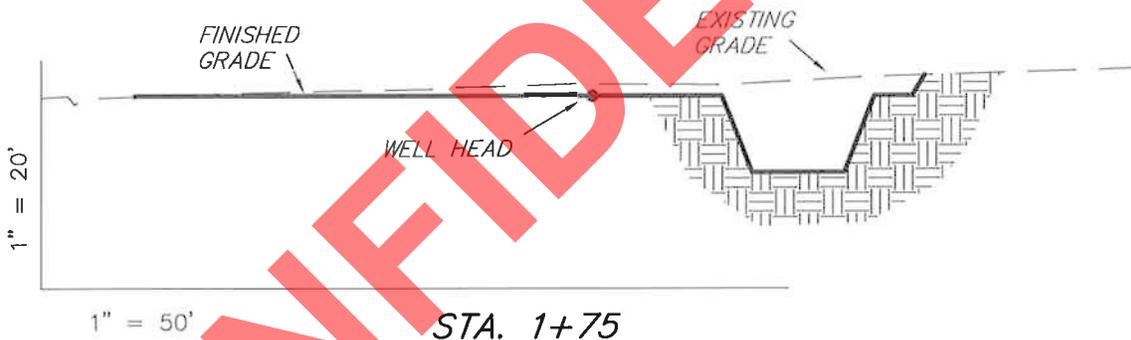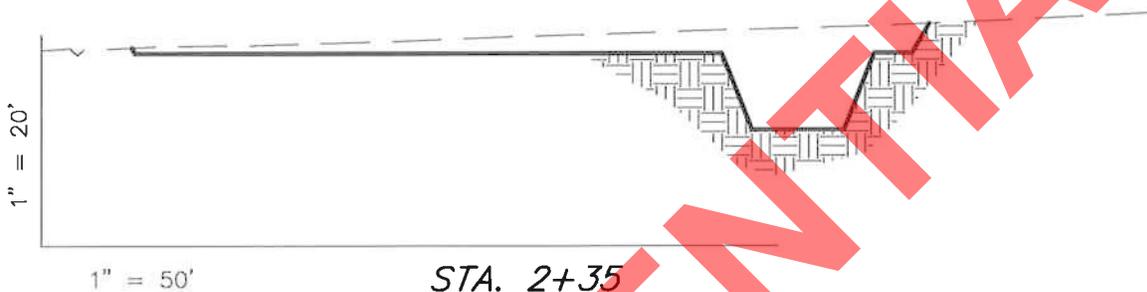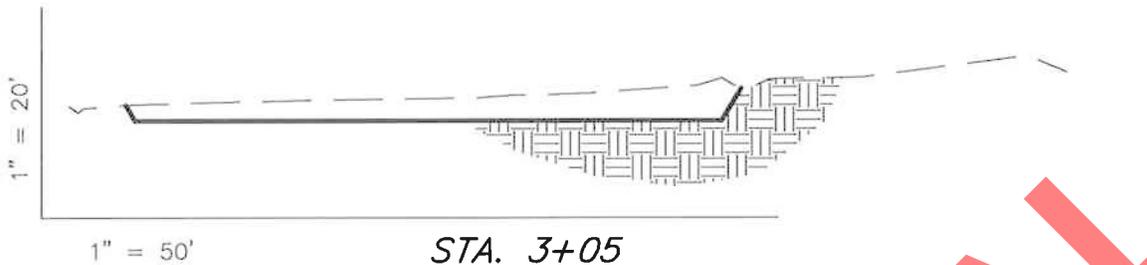

CONFIDENTIAL

NOTE:
UNLESS OTHERWISE
NOTED ALL CUT/FILL
SLOPES ARE AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES
(No Shrink or swell adjustments have been used)
(Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	1,200	1,200	Topsoil is not included in Pad Cut	0
PIT	640	0		640
TOTALS	1,840	1,200	1,020	640

SURVEYED BY: C.D.S.

DATE SURVEYED: 10-14-10

DRAWN BY: F.T.M.

DATE DRAWN: 10-21-10

SCALE: 1" = 50'

REVISED:


Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD EXPLORATION COMPANY

TYPICAL RIG LAYOUT

4-23-4-2W


Pad Location: NWNW Section 23, T4S, R2W, U.S.B.&M.

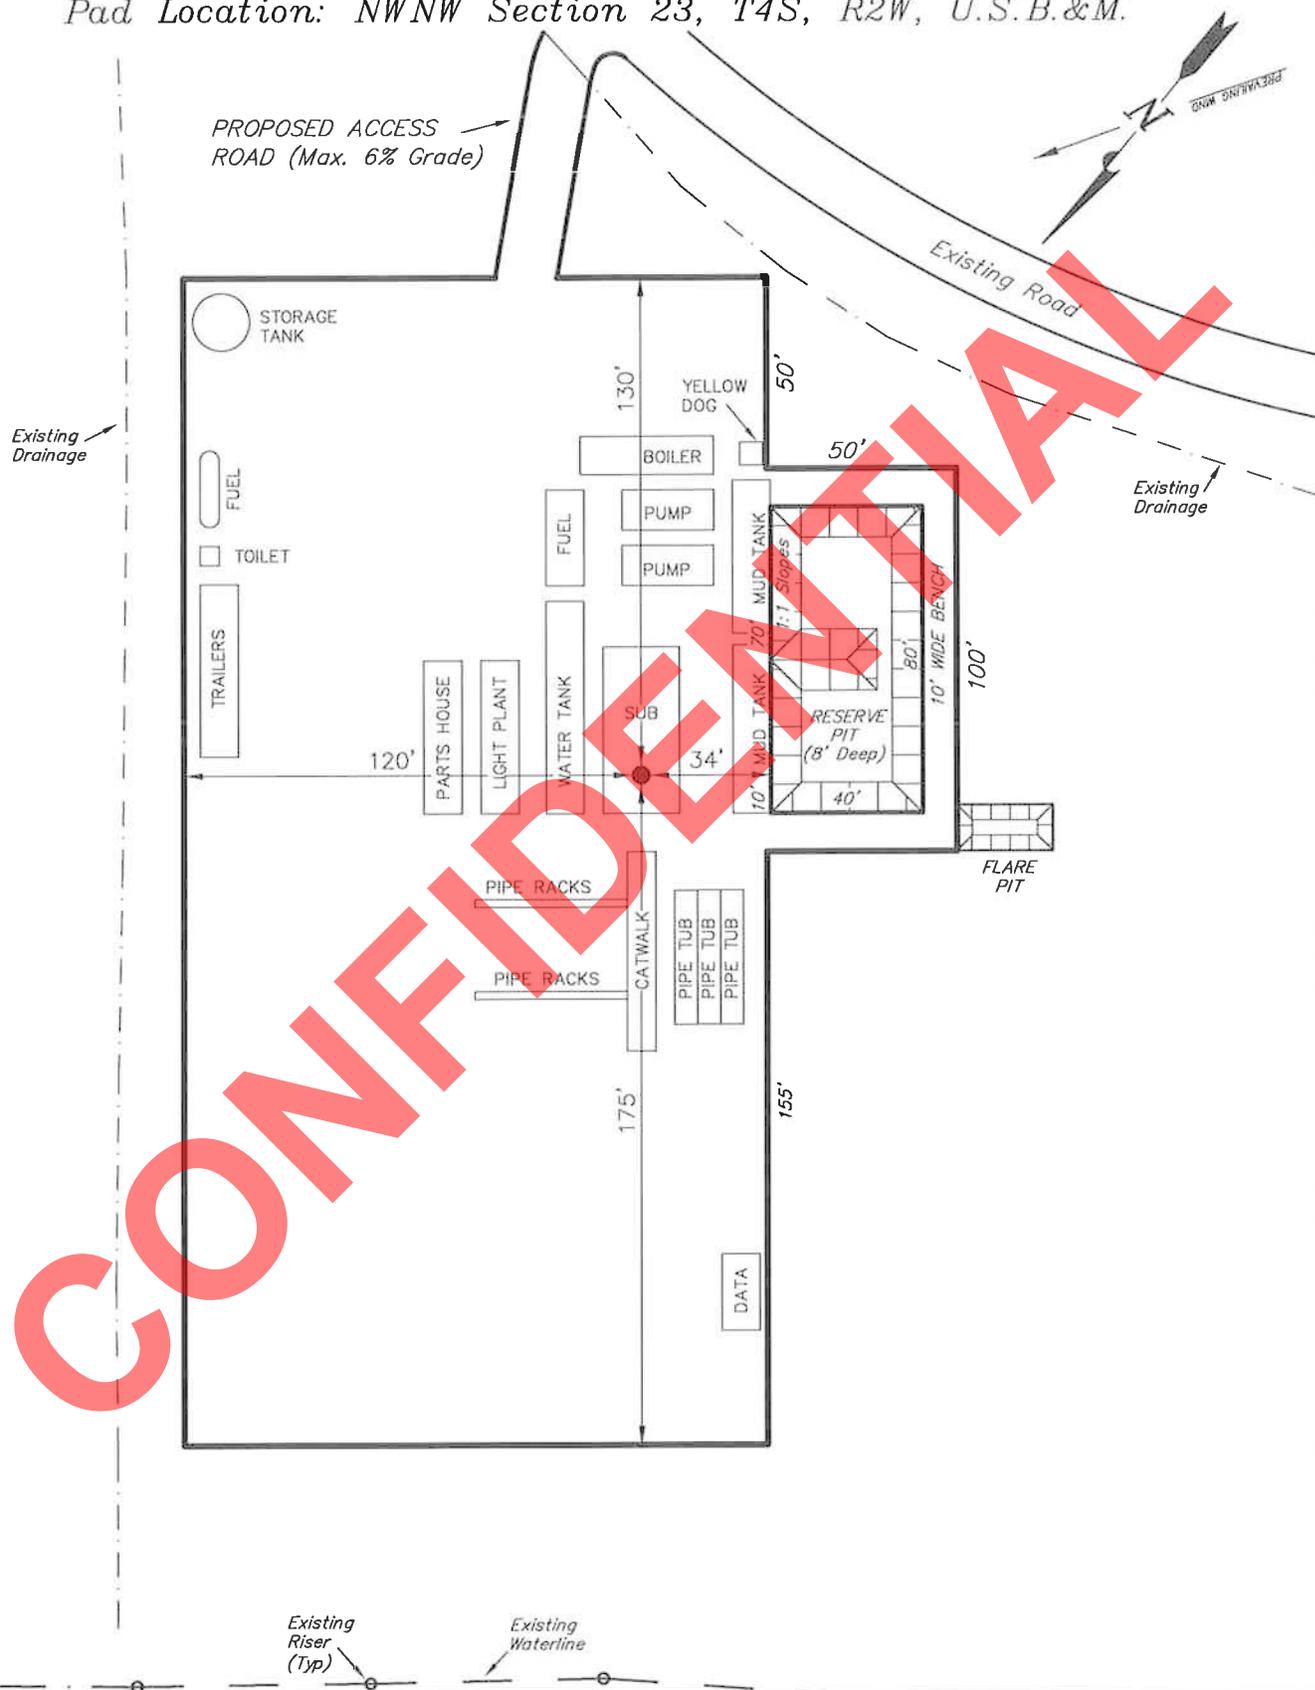

CONFIDENTIAL

SURVEYED BY: C.D.S.	DATE SURVEYED: 10-14-10
DRAWN BY: F.T.M.	DATE DRAWN: 10-21-10
SCALE: 1" = 50'	REVISED:


Tri State (435) 781-2501
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

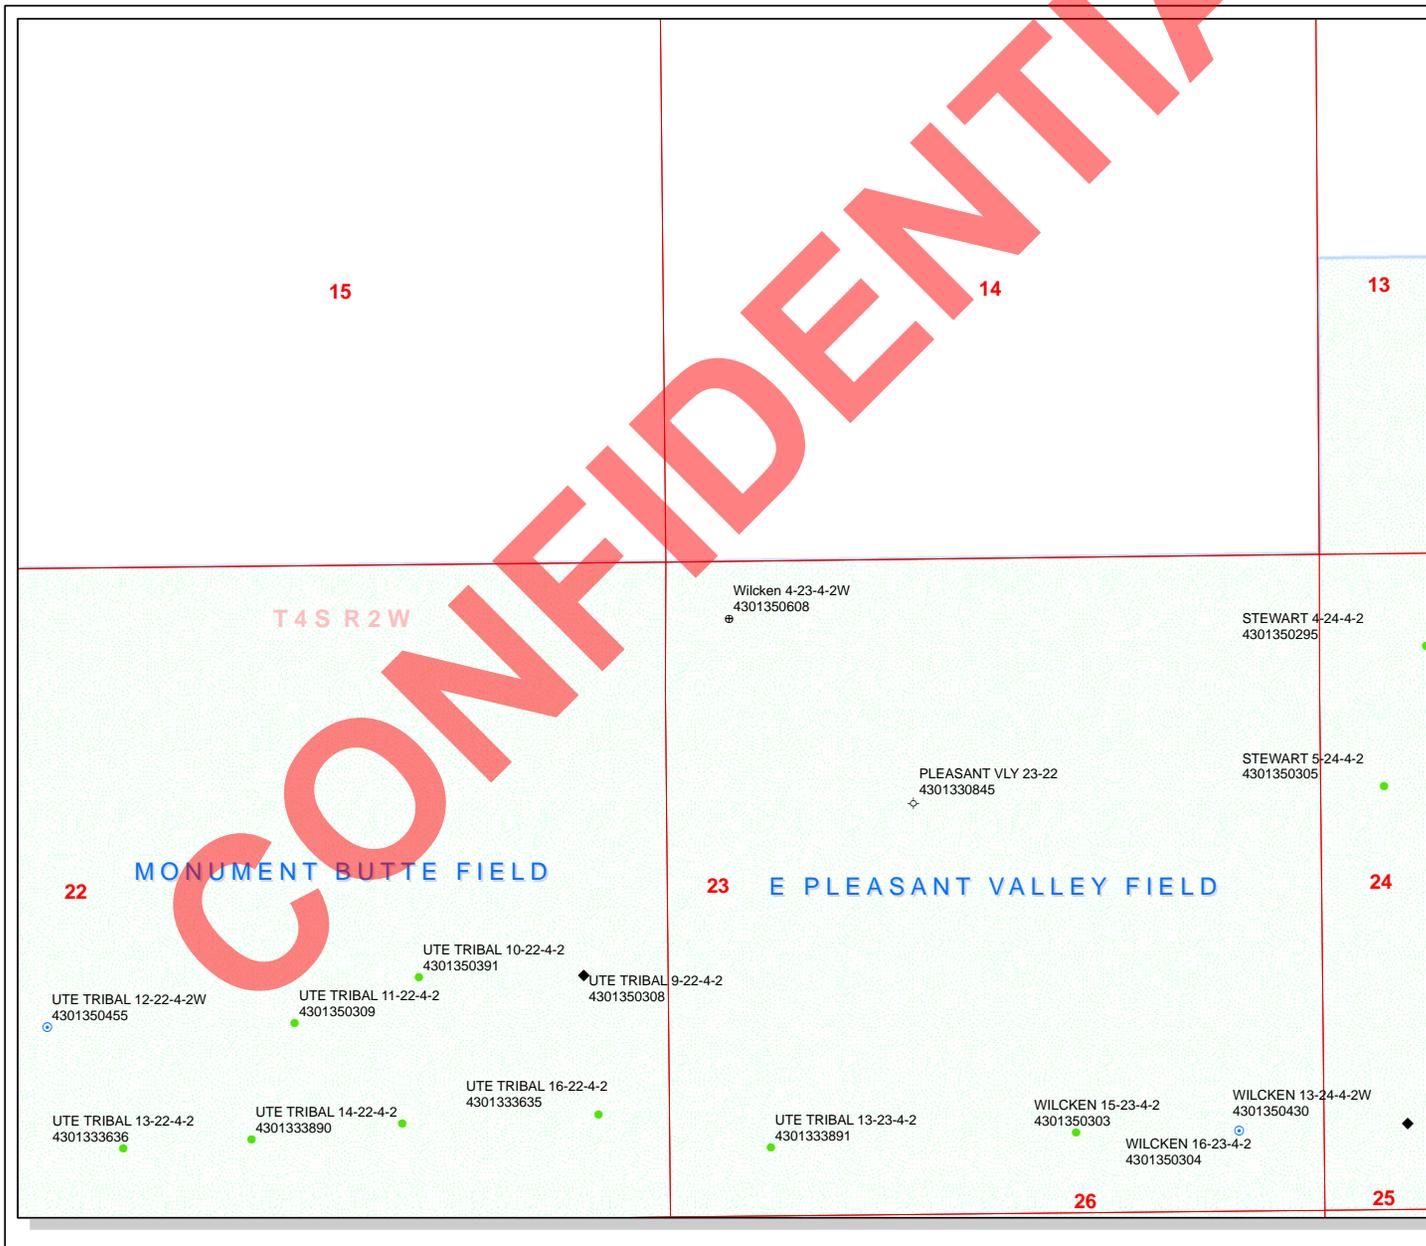

API Number: 4301350608
Well Name: Wilcken 4-23-4-2W
Township 04.0 S Range 02.0 W Section 23
Meridian: UBM
 Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared:
 Map Produced by Diana Mason

- | Units | Wells Query |
|---------------|------------------------------------|
| STATUS | Status |
| ACTIVE | APD - Approved Permit |
| EXPLORATORY | DRL - Spudded (Drilling Commenced) |
| GAS STORAGE | GIW - Gas Injection |
| NF PP OIL | GS - Gas Storage |
| NF SECONDARY | LA - Location Abandoned |
| PI OIL | LOC - New Location |
| PP GAS | OPS - Operation Suspended |
| PP GEOTHERML | PA - Plugged Abandoned |
| PP OIL | PGW - Producing Gas Well |
| SECONDARY | POW - Producing Oil Well |
| TERMINATED | RET - Returned APD |
| Fields | SGW - Shut-in Gas Well |
| Unknown | SOW - Shut-in Oil Well |
| ABANDONED | TA - Temp. Abandoned |
| ACTIVE | TW - Test Well |
| COMBINED | WDW - Water Disposal |
| INACTIVE | WIW - Water Injection Well |
| STORAGE | WSW - Water Supply Well |
| TERMINATED | |
| Sections | |
| Township | |



Well Name	NEWFIELD PRODUCTION COMPANY Wilcken 4-23-4-2W 43013506080000			
String	Surf	Prod		
Casing Size(")	8.625	5.500		
Setting Depth (TVD)	500	7165		
Previous Shoe Setting Depth (TVD)	0	500		
Max Mud Weight (ppg)	8.3	8.3		
BOPE Proposed (psi)	500	2000		
Casing Internal Yield (psi)	2950	4810		
Operators Max Anticipated Pressure (psi)	3081	8.3		

Calculations	Surf String	8.625	"
Max BHP (psi)	.052*Setting Depth*MW=	216	
			BOPE Adequate For Drilling And Setting Casing at Depth?
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=	156	YES <input type="checkbox"/> air drill <input type="checkbox"/>
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=	106	YES <input type="checkbox"/> OK <input type="checkbox"/>
			*Can Full Expected Pressure Be Held At Previous Shoe?
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=	106	NO <input type="checkbox"/> OK <input type="checkbox"/>
Required Casing/BOPE Test Pressure=		500	psi
*Max Pressure Allowed @ Previous Casing Shoe=		0	psi *Assumes 1psi/ft frac gradient

Calculations	Prod String	5.500	"
Max BHP (psi)	.052*Setting Depth*MW=	3092	
			BOPE Adequate For Drilling And Setting Casing at Depth?
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=	2232	NO <input type="checkbox"/>
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=	1516	YES <input type="checkbox"/> OK <input type="checkbox"/>
			*Can Full Expected Pressure Be Held At Previous Shoe?
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=	1626	NO <input type="checkbox"/> supplemental justification for area provided <input type="checkbox"/>
Required Casing/BOPE Test Pressure=		2000	psi
*Max Pressure Allowed @ Previous Casing Shoe=		500	psi *Assumes 1psi/ft frac gradient


Calculations	String		"
Max BHP (psi)	.052*Setting Depth*MW=		
			BOPE Adequate For Drilling And Setting Casing at Depth?
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=		NO <input type="checkbox"/>
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=		NO <input type="checkbox"/>
			*Can Full Expected Pressure Be Held At Previous Shoe?
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=		NO <input type="checkbox"/>
Required Casing/BOPE Test Pressure=			psi
*Max Pressure Allowed @ Previous Casing Shoe=			psi *Assumes 1psi/ft frac gradient

Calculations	String		"
Max BHP (psi)	.052*Setting Depth*MW=		
			BOPE Adequate For Drilling And Setting Casing at Depth?
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=		NO <input type="checkbox"/>
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=		NO <input type="checkbox"/>
			*Can Full Expected Pressure Be Held At Previous Shoe?
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=		NO <input type="checkbox"/>
Required Casing/BOPE Test Pressure=			psi

CONFIDENTIAL

43013506080000 Wilcken 4-23-4-2W

Casing Schematic

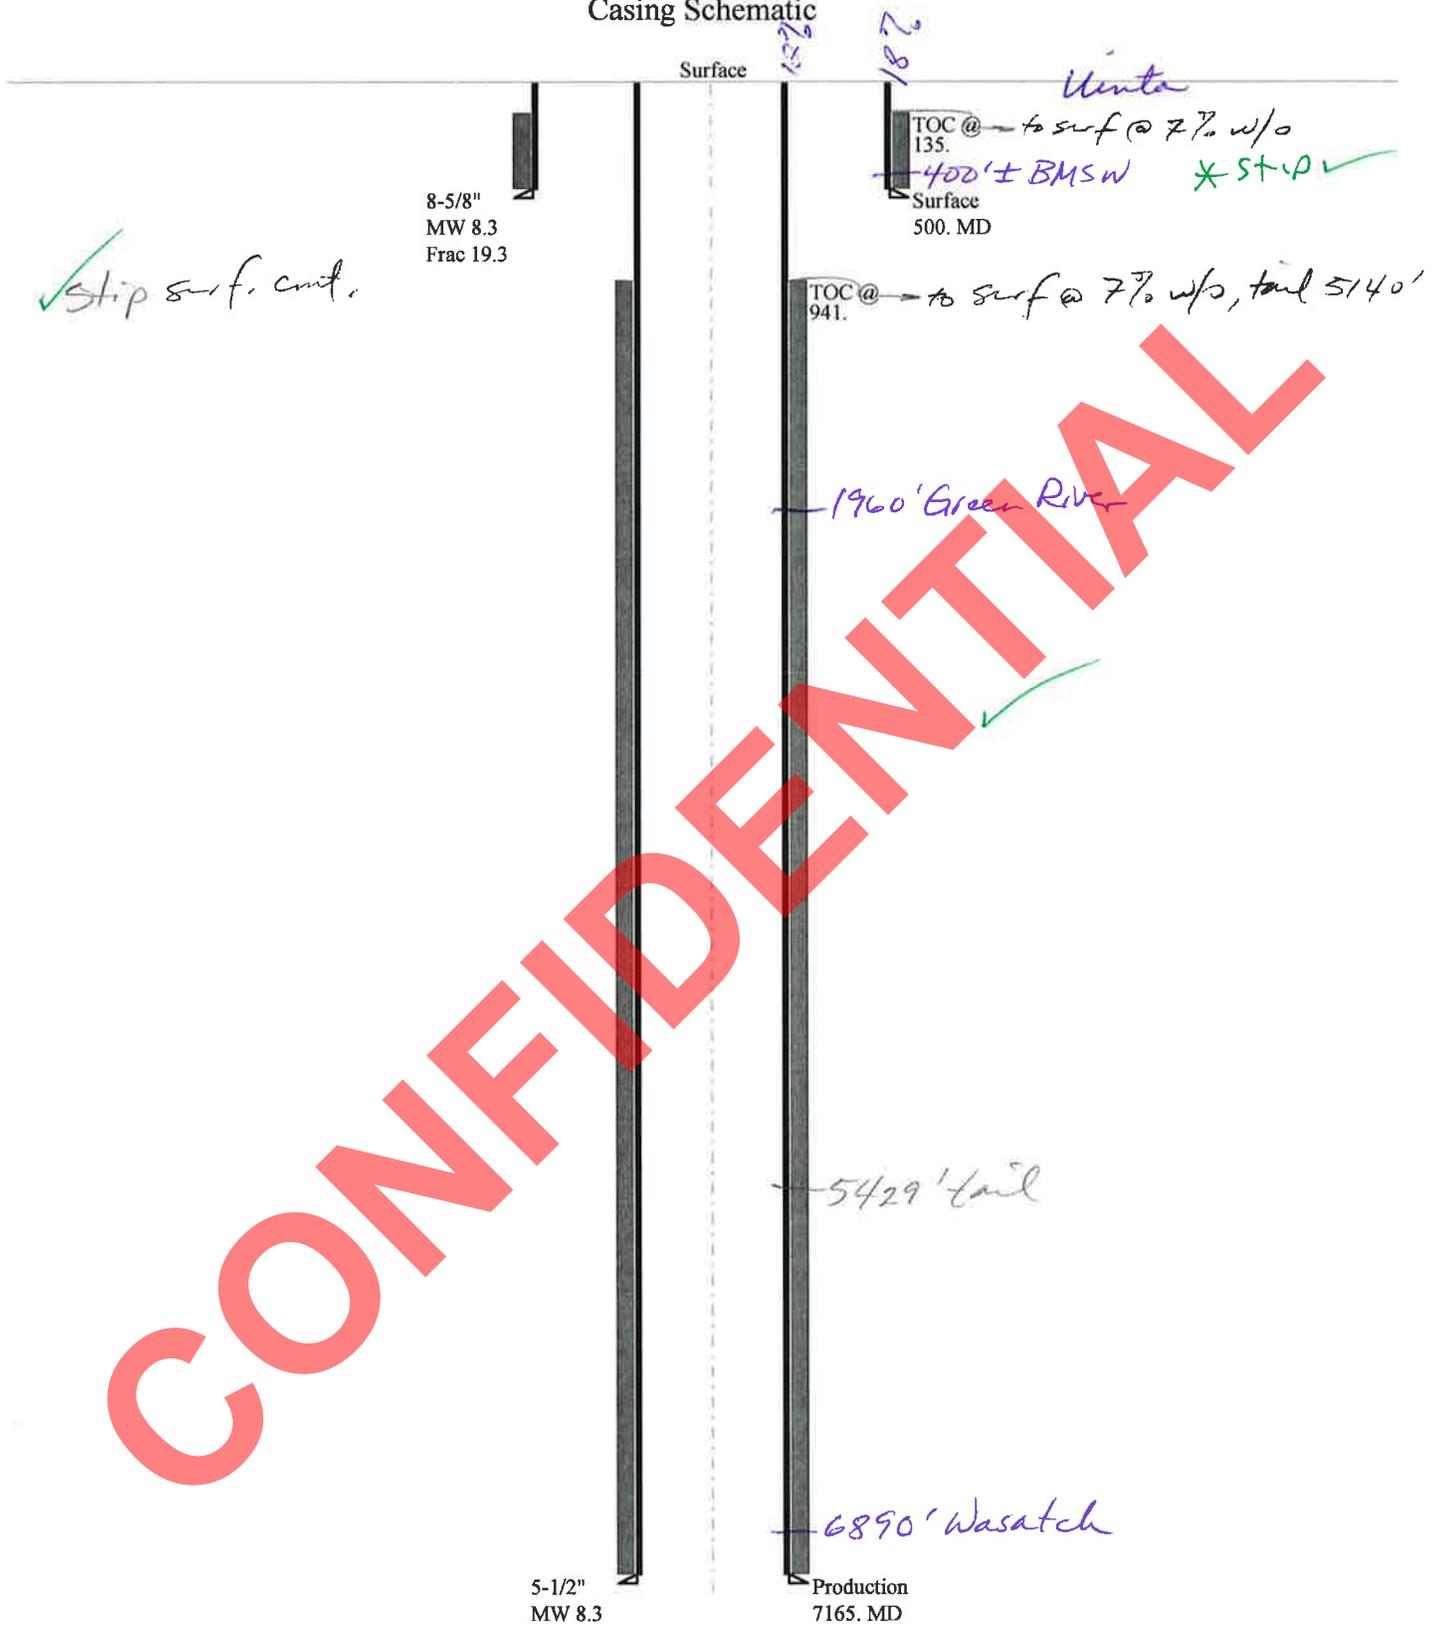

Well name:	43013506080000 Wilcken 4-23-4-2W	
Operator:	NEWFIELD PRODUCTION COMPANY	
String type:	Surface	Project ID: 43-013-50608
Location:	DUCHESNE COUNTY	

Design parameters:

Collapse

Mud weight: 8.330 ppg
Design is based on evacuated pipe.

Burst

Max anticipated surface pressure: 440 psi
Internal gradient: 0.120 psi/ft
Calculated BHP: 500 psi

No backup mud specified.

Minimum design factors:

Collapse:

Design factor: 1.125

Burst:

Design factor: 1.00

Tension:

8 Round STC: 1.80 (J)
8 Round LTC: 1.70 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Tension is based on air weight.
Neutral point: 437 ft

Environment:

H2S considered? No
Surface temperature: 74 °F
Bottom hole temperature: 81 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 100 ft

Cement top: 135 ft

Non-directional string.

Re subsequent strings:

Next setting depth: 7,165 ft
Next mud weight: 8.300 ppg
Next setting BHP: 3,089 psi
Fracture mud wt: 19.250 ppg
Fracture depth: 500 ft
Injection pressure: 500 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost (\$)
1	500	8.625	24.00	J-55	ST&C	500	500	7.972	2573
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	216	1370	6.333	500	2950	5.90	12	244	20.34 J

Prepared by: Helen Sadik-Macdonald
Div of Oil, Gas & Mining

Phone: 801 538-5357
FAX: 801-359-3940

Date: April 18, 2011
Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 500 ft, a mud weight of 8.33 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	43013506080000 Wilcken 4-23-4-2W	
Operator:	NEWFIELD PRODUCTION COMPANY	
String type:	Production	Project ID: 43-013-50608
Location:	DUCHESNE COUNTY	

Design parameters:

Collapse

Mud weight: 8.330 ppg
Design is based on evacuated pipe.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No
Surface temperature: 74 °F
Bottom hole temperature: 174 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 100 ft
Cement top: 941 ft

Burst

Max anticipated surface pressure: 1,524 psi
Internal gradient: 0.220 psi/ft
Calculated BHP 3,100 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.60 (B)

Tension is based on air weight.
Neutral point: 6,262 ft

Non-directional string.

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost (\$)
1	7165	5.5	15.50	J-55	LT&C	7165	7165	4.825	25300
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	3100	4040	1.303	3100	4810	1.55	111.1	217	1.95 J

Prepared by: Helen Sadik-Macdonald
Div of Oil, Gas & Mining

Phone: 801 538-5357
FAX: 801-359-3940

Date: April 18, 2011
Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 7165 ft, a mud weight of 8.33 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.



April 6, 2011

RECEIVED

APR 06 2011

DIV. OF OIL, GAS & MINING

Dustin Ducet
 Petroleum Engineer
 State of Utah, Division of Oil, Gas & Mineral

Helen Sadik-Macdonald
 Engineering Services
 State of Utah, Division of Oil, Gas & Mineral

Subject: Surface Casing Setting Depth in Monument Butte Field and Myton Area

Dustin & Helen:

Thank you both for your correspondence over the last few months regarding surface casing depths north of the Greater Monument Butte Super Unit (GMBU). As you know, the State of Utah has requested that Newfield (NFX) increase surface casing depths to 10% of the total well depth in the north part of our field. In some cases, this is more than twice the depth of the standard 300' of surface casing that has been set in the Monument Butte area over the last 25 years. I understand that the majority of your concern stems from NFX stepping out of the GMBU to the north. For that reason, I have attached a map for your review. This map depicts the area to the north of the GMBU in which NFX has drilled over 200 wells in the last 2 years. NFX refers to this area as the "Myton Area" (outlined with bold black line on the attached map). Our geological team has constructed an overlay displaying Upper Wasatch pressure gradients in this area. The overlay shows that the Myton Area is normally pressured with gradients at or below 0.47 psi/ft (9.0 ppg MW). Nearly 250 wells were drilled in this area utilizing 300' to 350' of surface casing in the last 2 years without incident.

NFX is requesting the following standardization of surface casing depths for the GMBU and the Myton Area:

- GMBU:
 - Continue surface casing program per GMBU standard operating procedure (SOP) of 290'
 - 1,900+ wells drilled in the GMBU with surface casing depths averaging 300'
- Myton Development Area:
 - Increase surface casing set depth in the Myton Area from 300' to 500'.
 - 300+ producing wells in Myton Area with surface casing depths averaging 350'

RECEIVED: Apr. 19, 2011

NEWFIELD



NFX has spent an extraordinary amount of time and money developing Utah's largest oilfield. We have compiled a large amount of data for this area. We feel very confident that 500' of surface casing is sufficient to safely and economically recover this natural resource. Rather than use an arbitrary "rule of thumb" and set surface casing at 10% of total depth, we are asking you to consider our area experience and the over 2,000 data points/wells we have available to us.

The stars on the attached map represent fee/fee wells (see list below) that the State of Utah is holding, pending a decision on surface casing depth. NFX requests that these wells be the first wells to require 500' of surface casing in the Myton Area.

- Rio Grande 9-13-4-1W
- Rio Grande 10-13-4-1W
- Rio Grande 11-13-4-1W
- Rio Grande 12-13-4-1W
- Rio Grande 13-13-4-1W
- Rio Grande 14-13-4-1W
- Rio Grande 15-13-4-1W
- Rio Grande 16-13-4-1W
- Hancock 8-20-4-1
- Wilken 2-23-4-2W
- Hancock 7-13-4-2W

Please feel free to contact me with any question or concerns regarding this request.

Respectfully,

Sean Stevens
Petroleum Engineer
Newfield Production Company
Myton, Utah
Office: 435-646-4833
Cell: 435-823-1162
sstevens@newfield.com

RECEIVED

APR 06 2011

DIV. OF OIL, GAS & MINING

Over Pressure Boundary

3S/3W

3S/2W

3S/1W

3S/1E

Increase surface casing set depth to 500'

Continue casing program per GMBU SOP

NEWFIELD

Newfield Rocky Mountains

Division of Oil, Gas & Mining

9S/18E

9S/17F

9S/16E

9S/15E



May 6, 2011

State of Utah, Division of Oil, Gas & Mining
ATTN: Diana Mason
PO Box 145801
Salt Lake City, UT 84114-5801

RE: Exception Location
Wilcken 4-23-4-2W
T4S R2W, Section 23: NWNW
423'FNL 543' FWL
Duchesne County, Utah

Dear Ms. Mason;

Pursuant to Rule 649-3-3 of the Oil & Gas Rules and Regulations of the State of Utah, Newfield Production Company ("NPC") hereby requests an exception location for the drilling of the captioned well. The proposed drillsite for this well is located 37' north of the drilling window required by Rule R649-3-2, which requires a well to be located in the center of a forty (40) acre quarter-quarter section, or a substantially equivalent lot or tract, with a tolerance of two hundred (200) feet in any direction from the center.

The attached plat depicts the proposed location and illustrates the deviation from the drilling window. The requested location has been chosen at the request of the surface owner.

Please note the drillsite and all surrounding acreage within a four hundred sixty (460') foot radius is owned by NPC, The Ute Tribe and Wilcken Oil Company. Their approvals are attached.

If you have any questions or require further information, please do not hesitate to contact the undersigned at 303-383-4137 or by email at awild@newfield.com. Your consideration of this matter is greatly appreciated.

Sincerely,

A handwritten signature in blue ink, appearing to read "Alan Wild", is written over a large, semi-transparent red "DRAFT" watermark that runs diagonally across the page.

Alan Wild
Land Associate

Attachment


Return to: Newfield Production Company
ATTN: Alan Wild
1001 17th Street, Suite 2000
Denver, CO 80202

303-685-8098 fax

awild@newfield.com email

Re: Exception Location
Wilcken 4-23-4-2W
T4S R2W, Section 23: NWNW
423' FNL 543' FWL
Duchesne County, Utah

Please be advised The Ute Indian Tribe does not have an objection to the proposed location of the
aforementioned well.

By:  Date: 5/4/2011
Bruce Parquets, Assistant Director
Print Name and Title

CONFIDENTIAL

Return to: Newfield Production Company
ATTN: Alan Wild
1001 17th Street, Suite 2000
Denver, CO 80202

303-685-8098 fax

awild@newfield.com email

Re: Exception Location
Wilcken 4-23-4-2W
T4S R2W, Section 23: NWNW
423' FNL 543' FWL
Duchesne County, Utah

Please be advised Wilcken Oil Company does not have an objection to the proposed location of the
aforementioned well.

By: Erik Wilcken

Date: 3-16-11

Erik Wilcken, President of Wilcken Oil
Print Name and Title

CONFIDENTIAL

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT
(highlight changes)

APPLICATION FOR PERMIT TO DRILL				5 MINERAL LEASE NO Fee	6 SURFACE Fee
1A TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>				7. IF INDIAN, ALLOTTEE OR TRIBE NAME NA	
B TYPE OF WELL: OIL <input checked="" type="checkbox"/> GAS <input type="checkbox"/> OTHER _____ SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>				8 UNIT or O.A. AGREEMENT NAME: NA	
2 NAME OF OPERATOR: Newfield Production Company				9 WELL NAME and NUMBER Wilcken 4-23-4-2W	
3 ADDRESS OF OPERATOR: Route #3 Box 3630 City Myton State UT ZIP 84052			PHONE NUMBER: (435) 646-3721		
4 LOCATION OF WELL (FOOTAGES) AT SURFACE: NW/NW 423' FNL 543' FWL AT PROPOSED PRODUCING ZONE:				10 FIELD AND POOL OR WILDCAT NA	
				11 QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NWNW 23 4S 2W	
14 DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: Approximately 6.5 miles south of Myton, Utah				12 COUNTY: Duchesne	
				13 STATE: UTAH	
15 DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) Approx. 423' f/lse line, NA' f/unit line		16 NUMBER OF ACRES IN LEASE: NA		17 NUMBER OF ACRES ASSIGNED TO THIS WELL 40 acres	
18 DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) NA		19 PROPOSED DEPTH 7,165		20 BOND DESCRIPTION #B001834	
21 ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.) 5287' GL		22 APPROXIMATE DATE WORK WILL START: 3-24-2011		23 ESTIMATED DURATION (7) days from SPUD to rig release	

24 PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE -	CASING SIZE, GRADE, AND WEIGHT PER FOOT	SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT			
12 1/4"	8 5/8 J-55 24.0	400	Class G w/2% CaCl	155 sx +/-	1.17	15.8
7 7/8"	5 1/2 J-55 15.5	7,165	Lead(Prem Lite II)	275 sx +/-	3.26	11.0
			Tail (50/50 Poz)	450 sx +/-	1.24	14.3

25 ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER	<input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER

NAME (PLEASE PRINT) Mandie Crozier TITLE Regulatory Specialist

SIGNATURE *Mandie Crozier* DATE 2/23/11

(This space for State use only)



API NUMBER ASSIGNED: _____

APPROVAL: _____

T4S, R2W, U.S.B.&M.

NEWFIELD EXPLORATION COMPANY

WELL LOCATION, 4-23-4-2W, LOCATED AS SHOWN IN THE NW 1/4 NW 1/4 OF SECTION 23, T4S, R2W, U.S.B.&M. DUCHESNE COUNTY, UTAH.

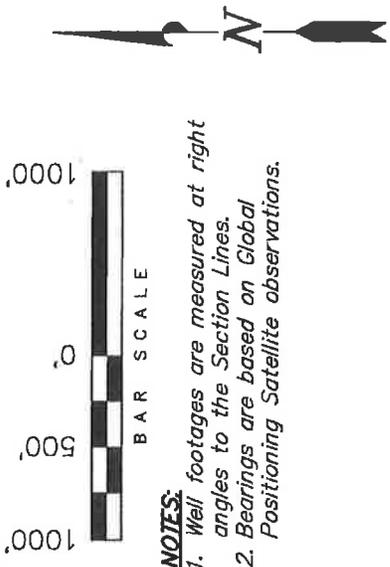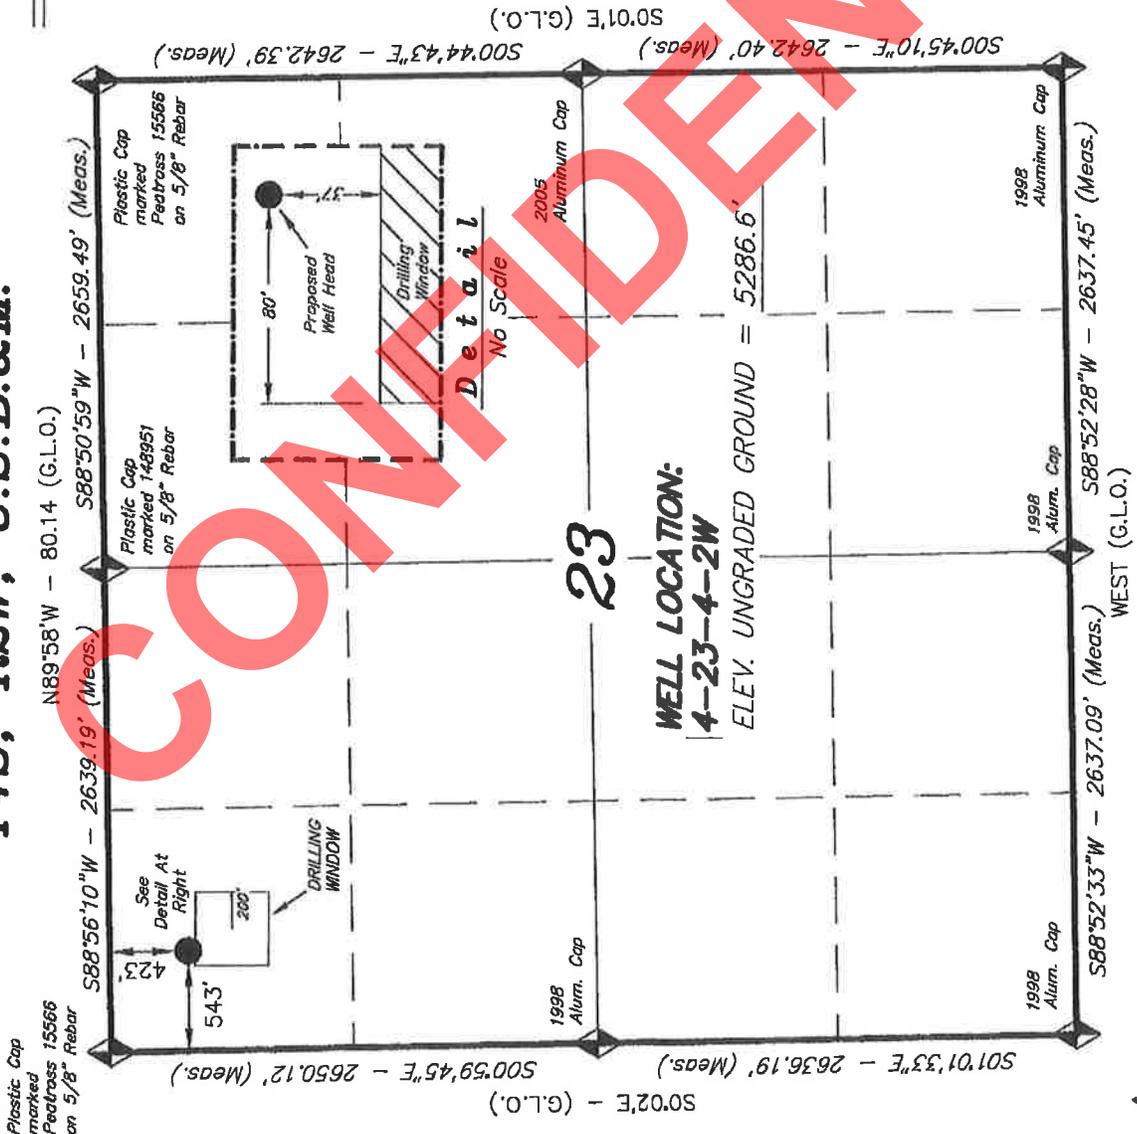

THIS IS TO CERTIFY THAT THE ABOVE PERT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. 189377

STACY W.
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 6622
 STATE OF UTAH

TRI STATE LAND SURVEYING & CONSULTING
 180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
 (435) 781-2501

DATE SURVEYED: 10-14-10	SURVEYED BY: C.D.S.
DATE DRAWN: 10-21-10	DRAWN BY: F.T.M.
REVISED:	SCALE: 1" = 1000'

4-23-4-2W
 (Surface Location) **NAD 83**
 LATITUDE = 40° 07' 35.71"
 LONGITUDE = 110° 05' 02.51"

◆ = SECTION CORNERS LOCATED
 BASIS OF ELEV; Elevations are base on LOCATION: an N.G.S. OPUS Correction.
 LAT. 40°04'09.56" LONG. 110°00'43.28"
 (Tristate Aluminum Cap) Elev. 5281.57'

ON-SITE PREDRILL EVALUATION

Utah Division of Oil, Gas and Mining

Operator NEWFIELD PRODUCTION COMPANY
Well Name Wilcken 4-23-4-2W
API Number 43013506080000 **APD No** 3487 **Field/Unit** MONUMENT BUTTE
Location: 1/4,1/4 NWNW **Sec** 23 **Tw** 4.0S **Rng** 2.0W 423 **FNL** 543 **FWL**
GPS Coord (UTM) 578105 4442007 **Surface Owner** Michael D.and Elizabeth Vanderhoof

Participants

Floyd Bartlett (DOGM) and Tim Eaton (Newfield Production Co)

Regional/Local Setting & Topography

The proposed location is approximately 6.5 road miles southwest of Myton, Duchesne County, Utah in a sub-drainage of Pleasant Valley Wash. This wash drains into the Pariette Draw drainage. Both of these draws contain perennial streams somewhat consisting of irrigation runoff and seepage. Pariette Draw runs into the Green River approximately 6 miles downstream from Ouray, Utah and about 13 miles downstream from the location. Broad flats in Pleasant Valley frequently used for agriculture characterize the area. Access is by State, County and planned or existing oil field development roads. Approximately 81 feet of new road will be constructed across private land to reach the location

The proposed Wilcken 4-23-4-2W oil well location is on a non-cultivated area on the south west edge of a wheel line sprinkled irrigated field. The area has a subtle slope to the north. An abandoned pond with a long dike is across the fence to the west. An existing road and constructed ditch are to the south. Maximum cut is 4.5 feet at Location Corner 8 and maximum fill 0.1 feet at Corner 1. The location is to the northwest slightly outside the normal drilling window to avoid the irrigated field, the road and ditches. The selected location appears to be a suitable site for drilling and operating a well.

Michael and Elizabeth Vanderhoof own the surface of the site.

Surface Use Plan

Current Surface Use

Grazing
Agricultural
Wildlife Habitat

New Road Miles	Well Pad	Src Const Material	Surface Formation
0.01	Width 204 Length 305	Onsite	UNTA

Ancillary Facilities N

Waste Management Plan Adequate?

Environmental Parameters

Affected Floodplains and/or Wetlands N

Flora / Fauna

Russian olive trees, slender wheat grass and weeds

Cattle, deer, small mammals and birds.

Soil Type and Characteristics

Deep sandy loam.

Erosion Issues N

Sedimentation Issues N

Site Stability Issues N

Drainage Diversion Required? N

Berm Required? Y

Erosion Sedimentation Control Required? N

Paleo Survey Run? N **Paleo Potential Observed?** N **Cultural Survey Run?** N **Cultural Resources?** N

Reserve Pit

Site-Specific Factors

Site Ranking

Distance to Groundwater (feet)	25 to 75	15	
Distance to Surface Water (feet)		20	
Dist. Nearest Municipal Well (ft)	>5280	0	
Distance to Other Wells (feet)	>1320	0	
Native Soil Type	Mod permeability	10	
Fluid Type	Fresh Water	5	
Drill Cuttings	Normal Rock	0	
Annual Precipitation (inches)		0	
Affected Populations			
Presence Nearby Utility Conduits	Not Present	0	
Final Score		50	1 Sensitivity Level

Characteristics / Requirements

The reserve pit is 40' x 80' x 8' deep located in an area of cut on the south west side of the location. A pit liner is required. Newfield commonly uses a 16-mil liner.

Closed Loop Mud Required? N **Liner Required?** Y **Liner Thickness** 16 **Pit Underlayment Required?** Y

Other Observations / Comments

Floyd Bartlett
Evaluator

3/2/2011
Date / Time

Application for Permit to Drill Statement of Basis

5/9/2011

Utah Division of Oil, Gas and Mining

Page 1

APD No	API WellNo	Status	Well Type	Surf Owner	CBM
3487	43013506080000	LOCKED	OW	P	No
Operator	NEWFIELD PRODUCTION COMPANY		Surface Owner-APD	Michael D. and Elizabeth Vanderhoof	
Well Name	Wilcken 4-23-4-2W		Unit		
Field	MONUMENT BUTTE		Type of Work	DRILL	
Location	NWNW 23 4S 2W U 423 FNL 543 FWL GPS Coord (UTM) 578104E 4441998N				

Geologic Statement of Basis

Newfield proposes to set 400' of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 400'. A search of Division of Water Rights records shows 6 water wells within a 10,000 foot radius of the center of Section 23. Uses for these wells are listed as domestic, irrigation and stock watering. Depth is listed for only 2 of the wells, at 24 and 70 feet. The well producing from 70 feet is approximately 3/4 mile northeast of the proposed location. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water. The proposed casing and cement should adequately protect ground water in this area.

Brad Hill
APD Evaluator

3/23/2011
Date / Time

Surface Statement of Basis

The proposed location is approximately 6.5 road miles southwest of Myton, Duchesne County, Utah in a sub-drainage of Pleasant Valley Wash. This wash drains into the Pariette Draw drainage. Both of these draws contain perennial streams somewhat consisting of irrigation runoff and seepage. Pariette Draw runs into the Green River approximately 6 miles downstream from Ouray, Utah and about 13 miles downstream from the location. Broad flats in Pleasant Valley frequently used for agriculture characterize the area. Access is by State, County and planned or existing oil field development roads. Approximately 81 feet of new road will be constructed across private land to reach the location.

The proposed Wilcken 4-23-4-2W oil well location is on a non-cultivated area on the south west edge of a wheel line sprinkled irrigated field. The area has a subtle slope to the north. An abandoned pond with a long dike is across the fence to the west. An existing road and constructed ditch are to the south. Maximum cut is 4.5 feet at Location Corner 8 and maximum fill 0.1 feet at Corner 1. The location is to the northwest slightly outside the normal drilling window to avoid the irrigated field, the road and ditches. The selected location appears to be a suitable site for drilling and operating a well.

Michael and Elizabeth Vanderhoof own the surface of the site. A telephone message was left for Mr. Vanderhoof inviting him to the pre-site visit. A return call was not received. A Surface Use Agreement exists. The minerals are owned by another party and under lease to Newfield Production Co.

Floyd Bartlett
Onsite Evaluator

3/2/2011
Date / Time

Conditions of Approval / Application for Permit to Drill

Category	Condition
Pits	A synthetic liner with a minimum thickness of 16 mils with a felt subliner shall be properly installed and maintained in the reserve pit.
Surface	The well site shall be bermed to prevent fluids from leaving the pad.

**Application for Permit to Drill
Statement of Basis**

5/9/2011

Utah Division of Oil, Gas and Mining

Page 2

Surface

The reserve pit shall be fenced upon completion of drilling operations.

CONFIDENTIAL

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 2/23/2011

API NO. ASSIGNED: 43013506080000

WELL NAME: Wilcken 4-23-4-2W

OPERATOR: NEWFIELD PRODUCTION COMPANY (N2695)

PHONE NUMBER: 435 646-4825

CONTACT: Mandie Crozier

PROPOSED LOCATION: NWNW 23 040S 020W

Permit Tech Review:

SURFACE: 0423 FNL 0543 FWL

Engineering Review:

BOTTOM: 0423 FNL 0543 FWL

Geology Review:

COUNTY: DUCHESNE

LATITUDE: 40.12657

LONGITUDE: -110.08333

UTM SURF EASTINGS: 578104.00

NORTHINGS: 4441998.00

FIELD NAME: MONUMENT BUTTE

LEASE TYPE: 4 - Fee

LEASE NUMBER: Fee

PROPOSED PRODUCING FORMATION(S): GREEN RIVER

SURFACE OWNER: 4 - Fee

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

- PLAT
- Bond: STATE/FEE - B001834
- Potash
- Oil Shale 190-5
- Oil Shale 190-3
- Oil Shale 190-13
- Water Permit: 437478
- RDCC Review:
- Fee Surface Agreement
- Intent to Commingle

Commingling Approved

LOCATION AND SITING:

- R649-2-3.
- Unit:
- R649-3-2. General
- R649-3-3. Exception
- Drilling Unit
- Board Cause No: R649-3-3
- Effective Date:
- Siting:
- R649-3-11. Directional Drill

Comments: Presite Completed

Stipulations:
 1 - Exception Location - bhill
 5 - Statement of Basis - bhill
 23 - Spacing - dmason
 25 - Surface Casing - ddoucet



GARY R. HERBERT
Governor

GREGORY S. BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: Wilcken 4-23-4-2W
API Well Number: 43013506080000
Lease Number: Fee
Surface Owner: FEE (PRIVATE)
Approval Date: 5/9/2011

Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of R649-3-3. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

Exception Location:

Appropriate information has been submitted to DOGM and administrative approval of the requested exception location is hereby granted.

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis (copy attached).

Surface casing shall be cemented to the surface.

Additional Approvals:

The operator is required to obtain approval from the Division of Oil, Gas and mining before performing any of the following actions during the drilling of this well:

- Any changes to the approved drilling plan – contact Dustin Doucet
- Significant plug back of the well – contact Dustin Doucet
- Plug and abandonment of the well – contact Dustin Doucet

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels
OR
submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <http://oilgas.ogm.utah.gov>
- 24 hours prior to testing blowout prevention equipment - contact Dan Jarvis
- 24 hours prior to cementing or testing casing – contact Dan Jarvis
- Within 24 hours of making any emergency changes to the approved drilling program – contact Dustin Doucet
- 24 hours prior to commencing operations to plug and abandon the well – contact Dan Jarvis

Contact Information:

The following are Division of Oil, Gas and Mining contacts and their telephone numbers (please leave a voicemail message if the person is not available to take the call):

- Carol Daniels 801-538-5284 - office
- Dustin Doucet 801-538-5281 - office
801-733-0983 - after office hours
- Dan Jarvis 801-538-5338 - office
801-231-8956 - after office hours

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

Approved By:



For John Rogers
Associate Director, Oil & Gas

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	5. LEASE DESIGNATION AND SERIAL NUMBER: Fee
	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
	7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Oil Well	8. WELL NAME and NUMBER: WILCKEN 4-23-4-2W
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY	9. API NUMBER: 43013506080000
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052	PHONE NUMBER: 435 646-4825 Ext
	9. FIELD and POOL or WILDCAT: MONUMENT BUTTE
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0423 FNL 0543 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWNW Section: 23 Township: 04.0S Range: 02.0W Meridian: U	COUNTY: DUCHESNE
	STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 5/9/2012	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield proposes to extend the Application for Permit to Drill for one year.

Approved by the Utah Division of Oil, Gas and Mining

Date: April 09, 2012

By:

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 4/4/2012	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013506080000

API: 43013506080000

Well Name: WILCKEN 4-23-4-2W

Location: 0423 FNL 0543 FWL QTR NWNW SEC 23 TWNP 040S RNG 020W MER U

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 5/9/2011

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Mandie Crozier

Date: 4/4/2012

Title: Regulatory Tech Representing: NEWFIELD PRODUCTION COMPANY

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	5. LEASE DESIGNATION AND SERIAL NUMBER: Fee
1. TYPE OF WELL Oil Well	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY	7. UNIT or CA AGREEMENT NAME:
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052	8. WELL NAME and NUMBER: WILCKEN 4-23-4-2W
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0423 FNL 0543 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWNW Section: 23 Township: 04.0S Range: 02.0W Meridian: U	9. API NUMBER: 43013506080000
5. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052	9. FIELD and POOL or WILDCAT: MONUMENT BUTTE
6. PHONE NUMBER: 435 646-4825 Ext	COUNTY: DUCHESNE
7. STATE: UTAH	STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 5/9/2013	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield proposes to extend the Application for Permit to Drill this well.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: April 10, 2013

By: 

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 4/4/2013	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013506080000

API: 43013506080000

Well Name: WILCKEN 4-23-4-2W

Location: 0423 FNL 0543 FWL QTR NWNW SEC 23 TWNP 040S RNG 020W MER U

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 5/9/2011

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Mandie Crozier

Date: 4/4/2013

Title: Regulatory Tech Representing: NEWFIELD PRODUCTION COMPANY