


STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT ☐

APPLICATION FOR PERMIT TO DRILL						1. WELL NAME and NUMBER GMBU D-17-9-16							
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>						3. FIELD OR WILDCAT MONUMENT BUTTE							
4. TYPE OF WELL Oil Well Coalbed Methane Well: NO						5. UNIT or COMMUNITIZATION AGREEMENT NAME GMBU (GRRV)							
6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY						7. OPERATOR PHONE 435 646-4825							
8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Myton, UT, 84052						9. OPERATOR E-MAIL mcrozier@newfield.com							
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UTU-74390			11. MINERAL OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>			12. SURFACE OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>							
13. NAME OF SURFACE OWNER (if box 12 = 'fee')						14. SURFACE OWNER PHONE (if box 12 = 'fee')							
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')						16. SURFACE OWNER E-MAIL (if box 12 = 'fee')							
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')			18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>			19. SLANT VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>							
20. LOCATION OF WELL		FOOTAGES		QTR-QTR		SECTION		TOWNSHIP		RANGE		MERIDIAN	
LOCATION AT SURFACE		578 FSL 791 FWL		SWSW		8		9.0 S		16.0 E		S	
Top of Uppermost Producing Zone		200 FSL 1209 FWL		SWSW		8		9.0 S		16.0 E		S	
At Total Depth		209 FNL 1636 FWL		NENW		17		9.0 S		16.0 E		S	
21. COUNTY DUCESNE			22. DISTANCE TO NEAREST LEASE LINE (Feet) 1004			23. NUMBER OF ACRES IN DRILLING UNIT 20							
			25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 730			26. PROPOSED DEPTH MD: 6360 TVD: 6360							
27. ELEVATION - GROUND LEVEL 5984			28. BOND NUMBER WYB000493			29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 437478							
Hole, Casing, and Cement Information													
String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement		Sacks	Yield	Weight		
Surf	12.25	8.625	0 - 300	24.0	J-55 ST&C	8.3	Class G		138	1.17	15.8		
Prod	7.875	5.5	0 - 6360	15.5	J-55 LT&C	8.3	Premium Lite High Strength		301	3.26	11.0		
							50/50 Poz		363	1.24	14.3		
ATTACHMENTS													
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES													
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER						<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN							
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)						<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER							
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)						<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP							
NAME Mandie Crozier					TITLE Regulatory Tech					PHONE 435 646-4825			
SIGNATURE					DATE 04/28/2011					EMAIL mcrozier@newfield.com			
API NUMBER ASSIGNED 43013507010000					APPROVAL  Permit Manager								

NEWFIELD PRODUCTION COMPANY
GMBU D-17-9-16
AT SURFACE: SW/SW SECTION 8, T9S, R16E
DUCHESNE COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0' – 1615'
Green River	1615'
Wasatch	6185'
Proposed TD	6360'

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil) 1615' – 6185'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO ₃) (mg/l)
Dissolved Bicarbonate (NaHCO ₃) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO ₄) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. Casing Design: GMBU D-17-9-16

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	300'	24.0	J-55	STC	2,950 17.53	1,370 14.35	244,000 33.89
Prod casing 5-1/2"	0'	6,360'	15.5	J-55	LTC	4,810 2.38	4,040 2.00	217,000 2.20

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg
 Pore pressure at surface casing shoe = 8.33 ppg
 Pore pressure at prod casing shoe = 8.33 ppg
 Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. Cementing Design: GMBU D-17-9-16

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft ³ /sk)
			ft ³			
Surface casing	300'	Class G w/ 2% CaCl	138 161	30%	15.8	1.17
Prod casing Lead	4,360'	Prem Lite II w/ 10% gel + 3% KCl	301 982	30%	11.0	3.26
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363 451	30%	14.3	1.24

*Actual volume pumped will be 15% over the caliper log

- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
- Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ± 350 feet will be drilled with an air/mist system. The air rig is equipped with a 6 1/2" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ± 350 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.


10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the third quarter of 2011, and take approximately seven (7) days from spud to rig release.

T9S, R16E, S.L.B.&M.

NEWFIELD EXPLORATION COMPANY

WELL LOCATION, D-17-9-16, LOCATED
AS SHOWN IN THE SW 1/4 SW 1/4 OF
SECTION 8, T9S, R16E, S.L.B.&M.
DUCHESNE COUNTY, UTAH.



NOTES:

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.
3. The Center of Pattern footages are 20' FSL & 1390' FWL.



THIS IS TO CERTIFY THAT THE ABOVE PERSON WAS
PREPARED FROM FIELD NOTES OF ACADEMIC SURVEYS
MADE BY ME OR UNDER MY SUPERVISION AND THAT
THE SAME ARE TRUE AND CORRECT TO THE BEST
OF MY KNOWLEDGE AND BELIEF.

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS
PREPARED FROM FIELD NOTES OF ACTUAL SURV
MADE BY ME OR UNDER MY SUPERVISION AND
THE SAME ARE TRUE AND CORRECT TO THE BE
OF MY KNOWLEDGE AND BELIEF.

REGISTERED LAND SURVEYOR
No. 189377
STACY W.
STEWART
REGISTERED LAND SURVEYOR
RENEWAL No. 189377
STATE OF UTAH

TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501

DATE SURVEYED:
11-02-10


SURVEYED BY: T.P.


DATE DRAWN:
01-19-11

DRAWN BY: M.W.

REVISÉ:


SCALE: 1" = 1000'

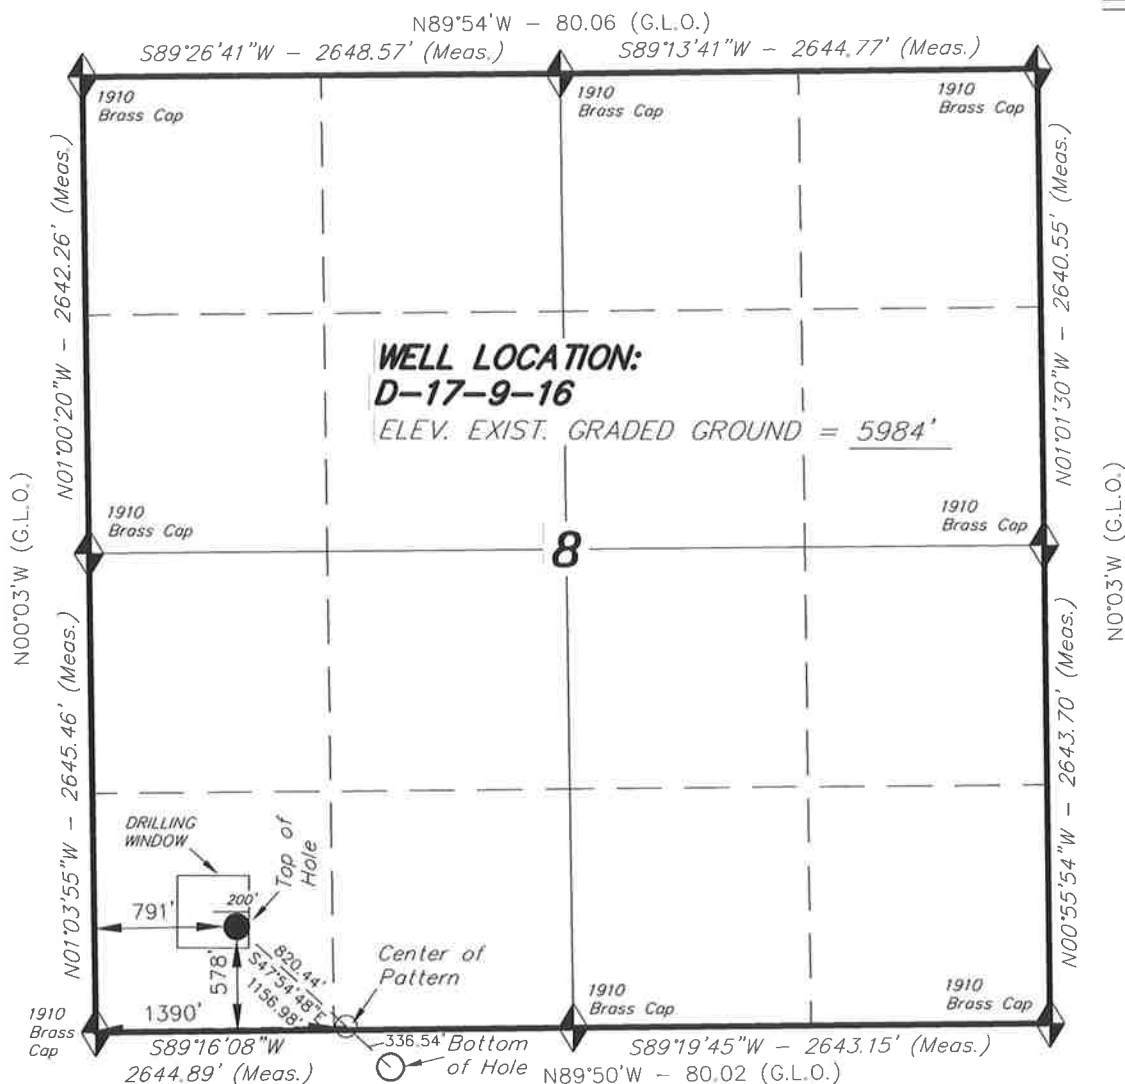

 = SECTION CORNERS LOCATED

BASIS OF ELEV; Elevations are base on
LOCATION: an N.G.S. OPUS Correction.
LAT. 40°04'09.56" LONG. 110°00'43.28"
(Tristate Aluminum Cap) Elev. 5281.57'

D-17-9-16
(Surface Location) NAD 83
LATITUDE = 40° 02' 23.10"
LONGITUDE = 110° 08' 59.33"

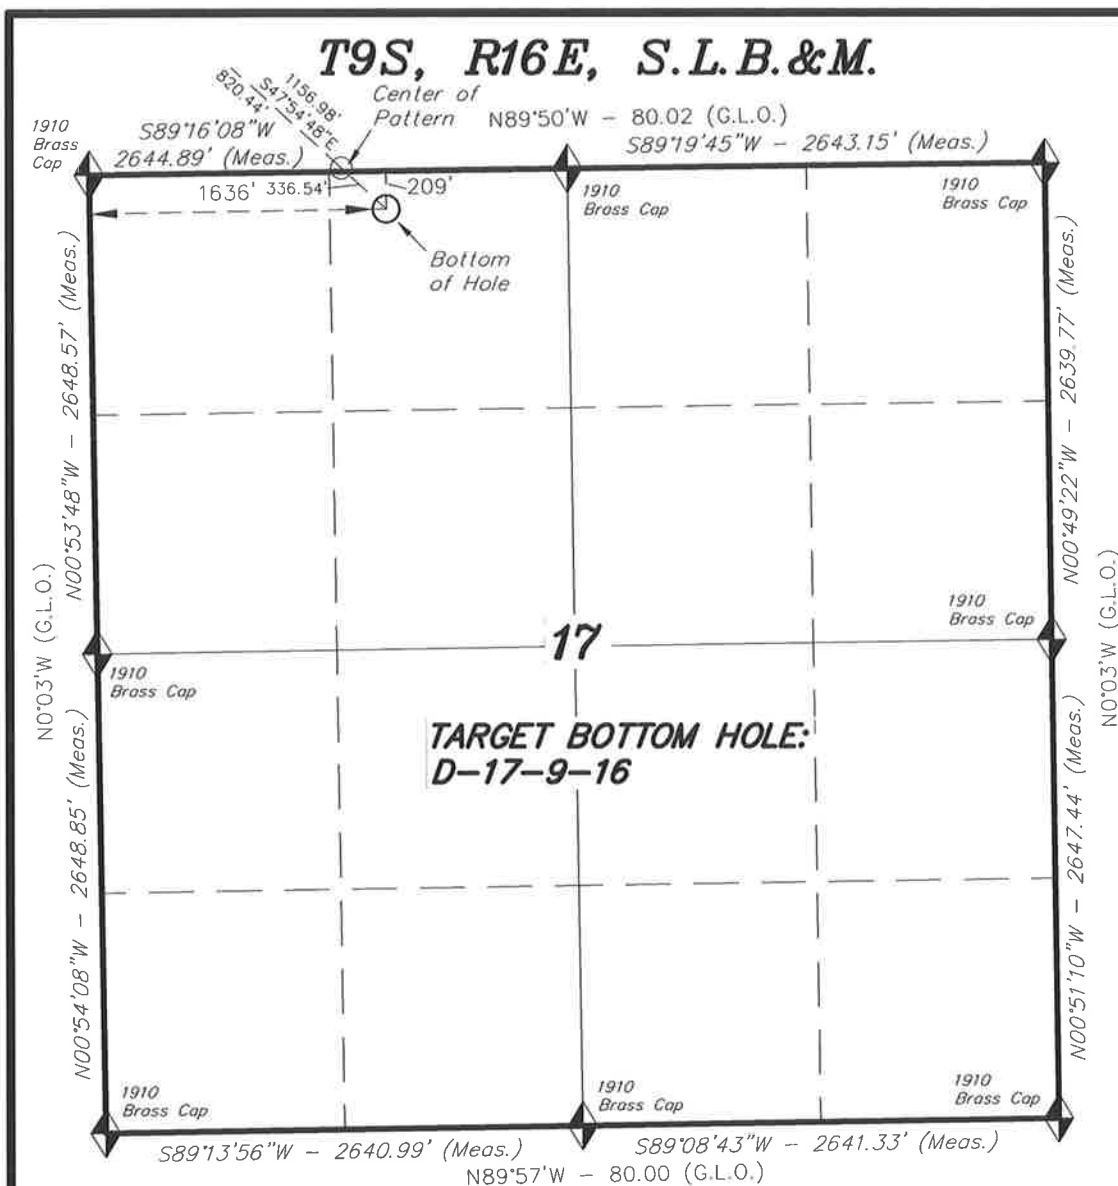


 = SECTION CORNERS LOCATED

BASIS OF ELEV; Elevations are base on
LOCATION: an N.G.S. OPUS Correction.
LAT. 40°04'09.56" LONG. 110°00'43.28"
(Tristate Aluminum Cap) Elev. 5281.57'

T9S, R16E, S.L.B.&M.

NEWFIELD EXPLORATION COMPANY

TARGET BOTTOM HOLE, D-17-9-16,
LOCATED AS SHOWN IN THE NE 1/4 NW
1/4 OF SECTION 17, T9S, R16E,
S.L.B.&M. DUCHESNE COUNTY, UTAH.

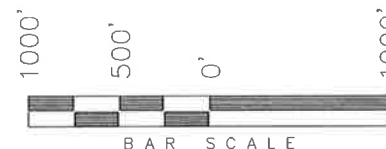

NOTES:

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.
3. The Bottom of Hole footages are 209' FNL & 1636' FWL.



THIS IS TO CERTIFY THAT THE ABOVE PLOT WAS
PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS
MADE BY ME OR UNDER MY SUPERVISION AND THAT
THE SAME ARE TRUE AND CORRECT TO THE BEST
OF MY KNOWLEDGE AND BELIEF.

STACY W. STEWART
REGISTERED LAND SURVEYOR
REGISTRATION No. 2027
STATE OF UTAH

TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501

DATE SURVEYED:
11-02-10


SURVEYED BY: T.P.

DATE DRAWN:
01-19-11

DRAWN BY: M.W.

REVISÉ:

SCALE: 1" = 1000'

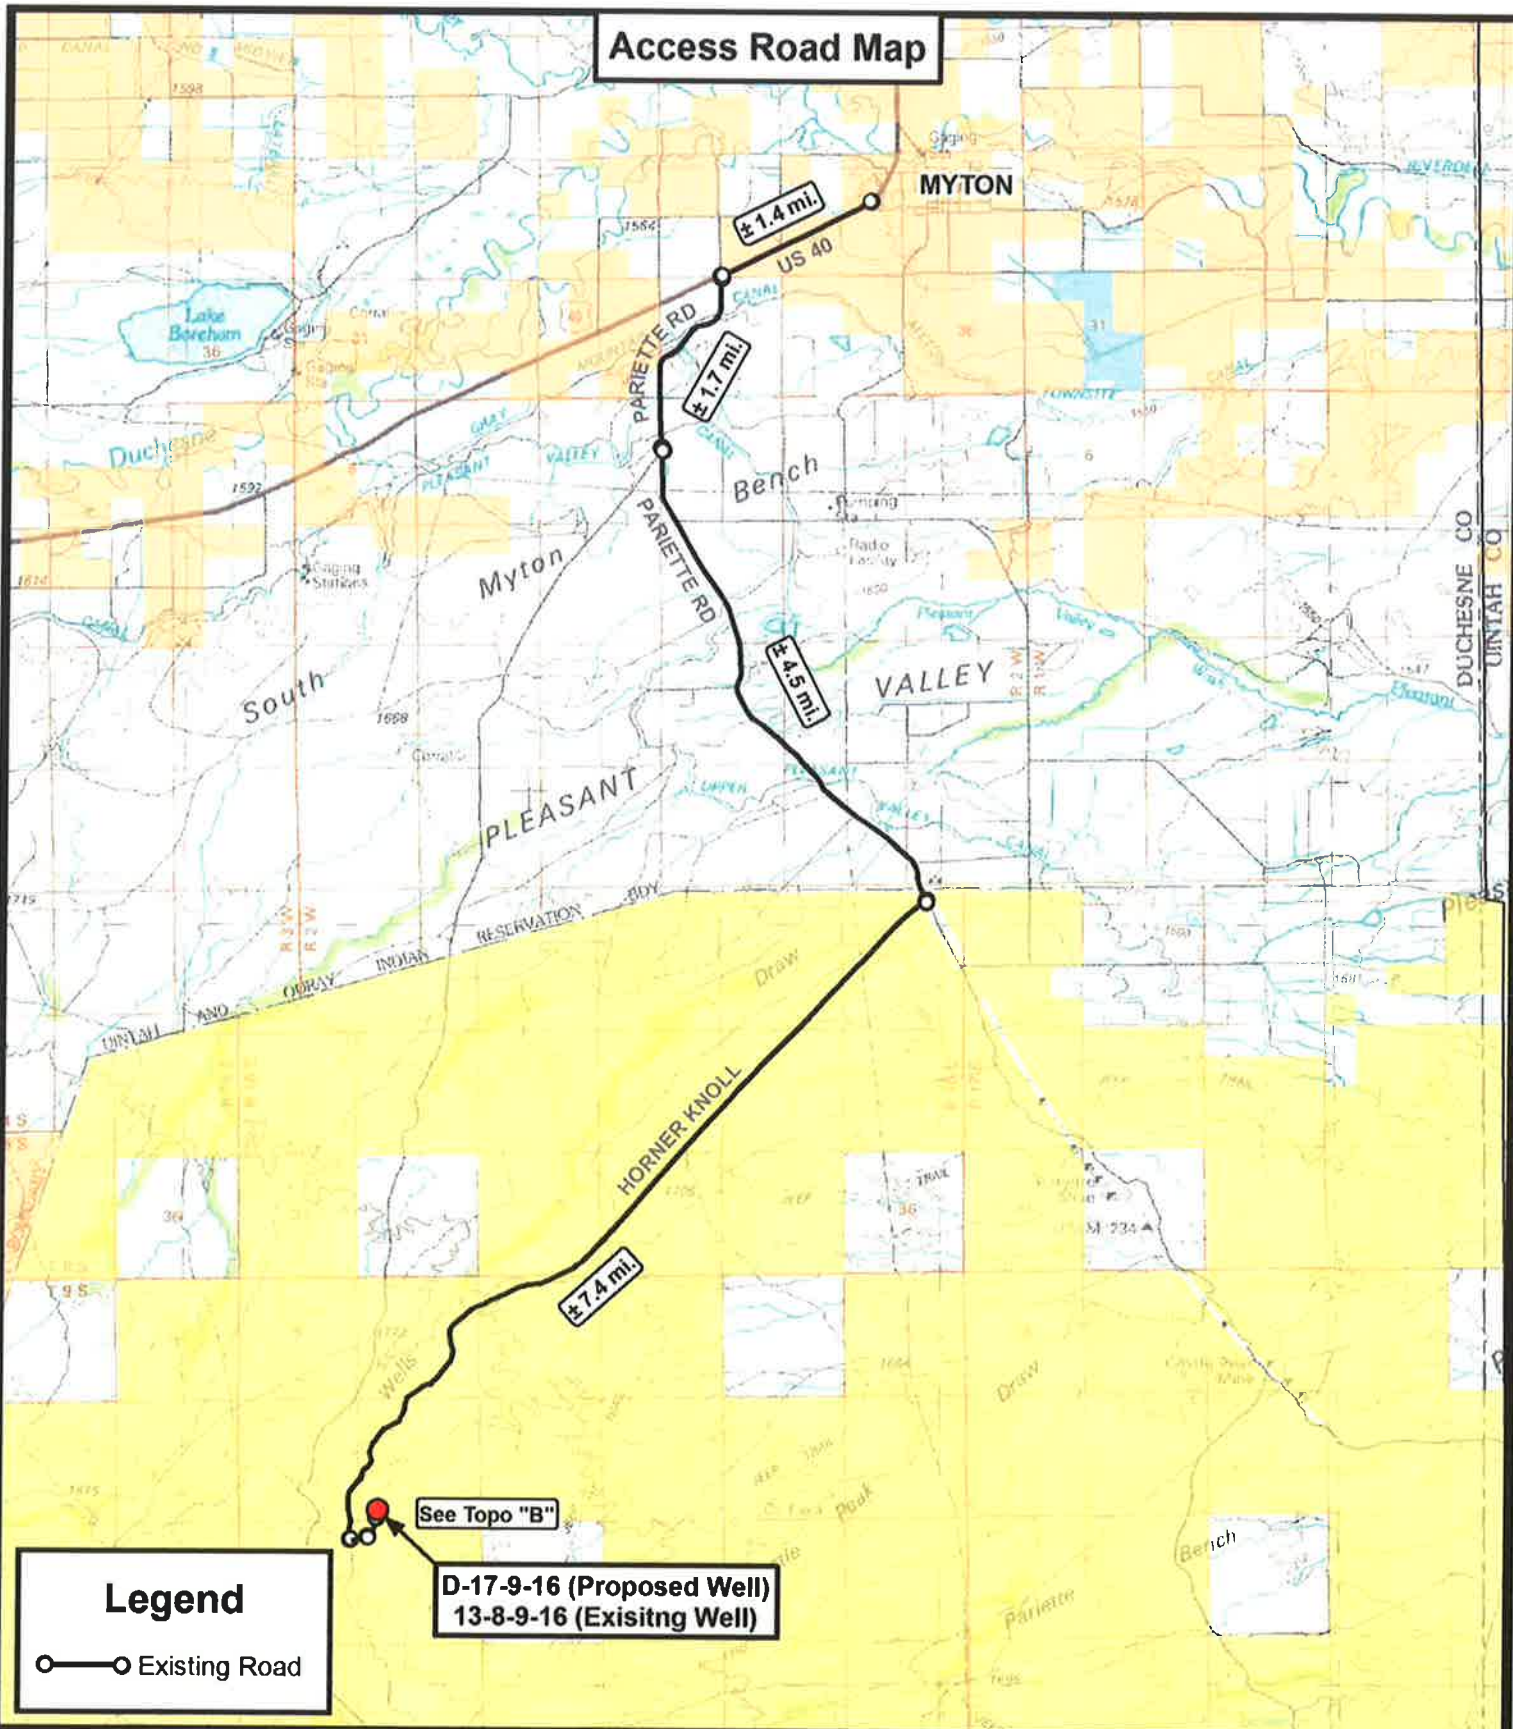

Tri State
Land Surveying, Inc.

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518

N



NEWFIELD EXPLORATION COMPANY

D-17-9-16 (Proposed Well)
13-8-9-16 (Existing Well)
SEC. 8, T9S, R16E, S.L.B.&M.
Duchesne County, UT.

DRAWN BY: C.H.M.
DATE: 01-19-2011
SCALE: 1:100,000

TOPOGRAPHIC MAP

SHEET
A

RECEIVED: May. 11, 2011

Access Road Map



Legend

— Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

D-17-9-16 (Proposed Well)
13-8-9-16 (Exisitng Well)
SEC. 8, T9S, R16E, S.L.B.&M.
Duchesne County, UT.


DRAWN BY: C.H.M.
DATE: 01-19-2011
SCALE: 1" = 2,000'

TOPOGRAPHIC MAP

SHEET
B

RECEIVED: May. 11, 2011

Proposed Pipeline Map

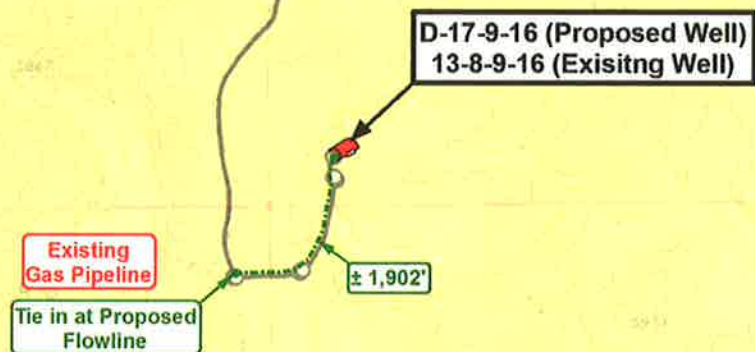

Legend

- Existing Road
- Proposed Flowline

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

D-17-9-16 (Proposed Well)
13-8-9-16 (Existing Well)
SEC. 8, T9S, R16E, S.L.B.&M.
Duchesne County, UT.

DRAWN BY: C.H.M.
DATE: 01-19-2011
SCALE: 1" = 2,000'

TOPOGRAPHIC MAP

SHEET
C

RECEIVED: May. 11, 2011


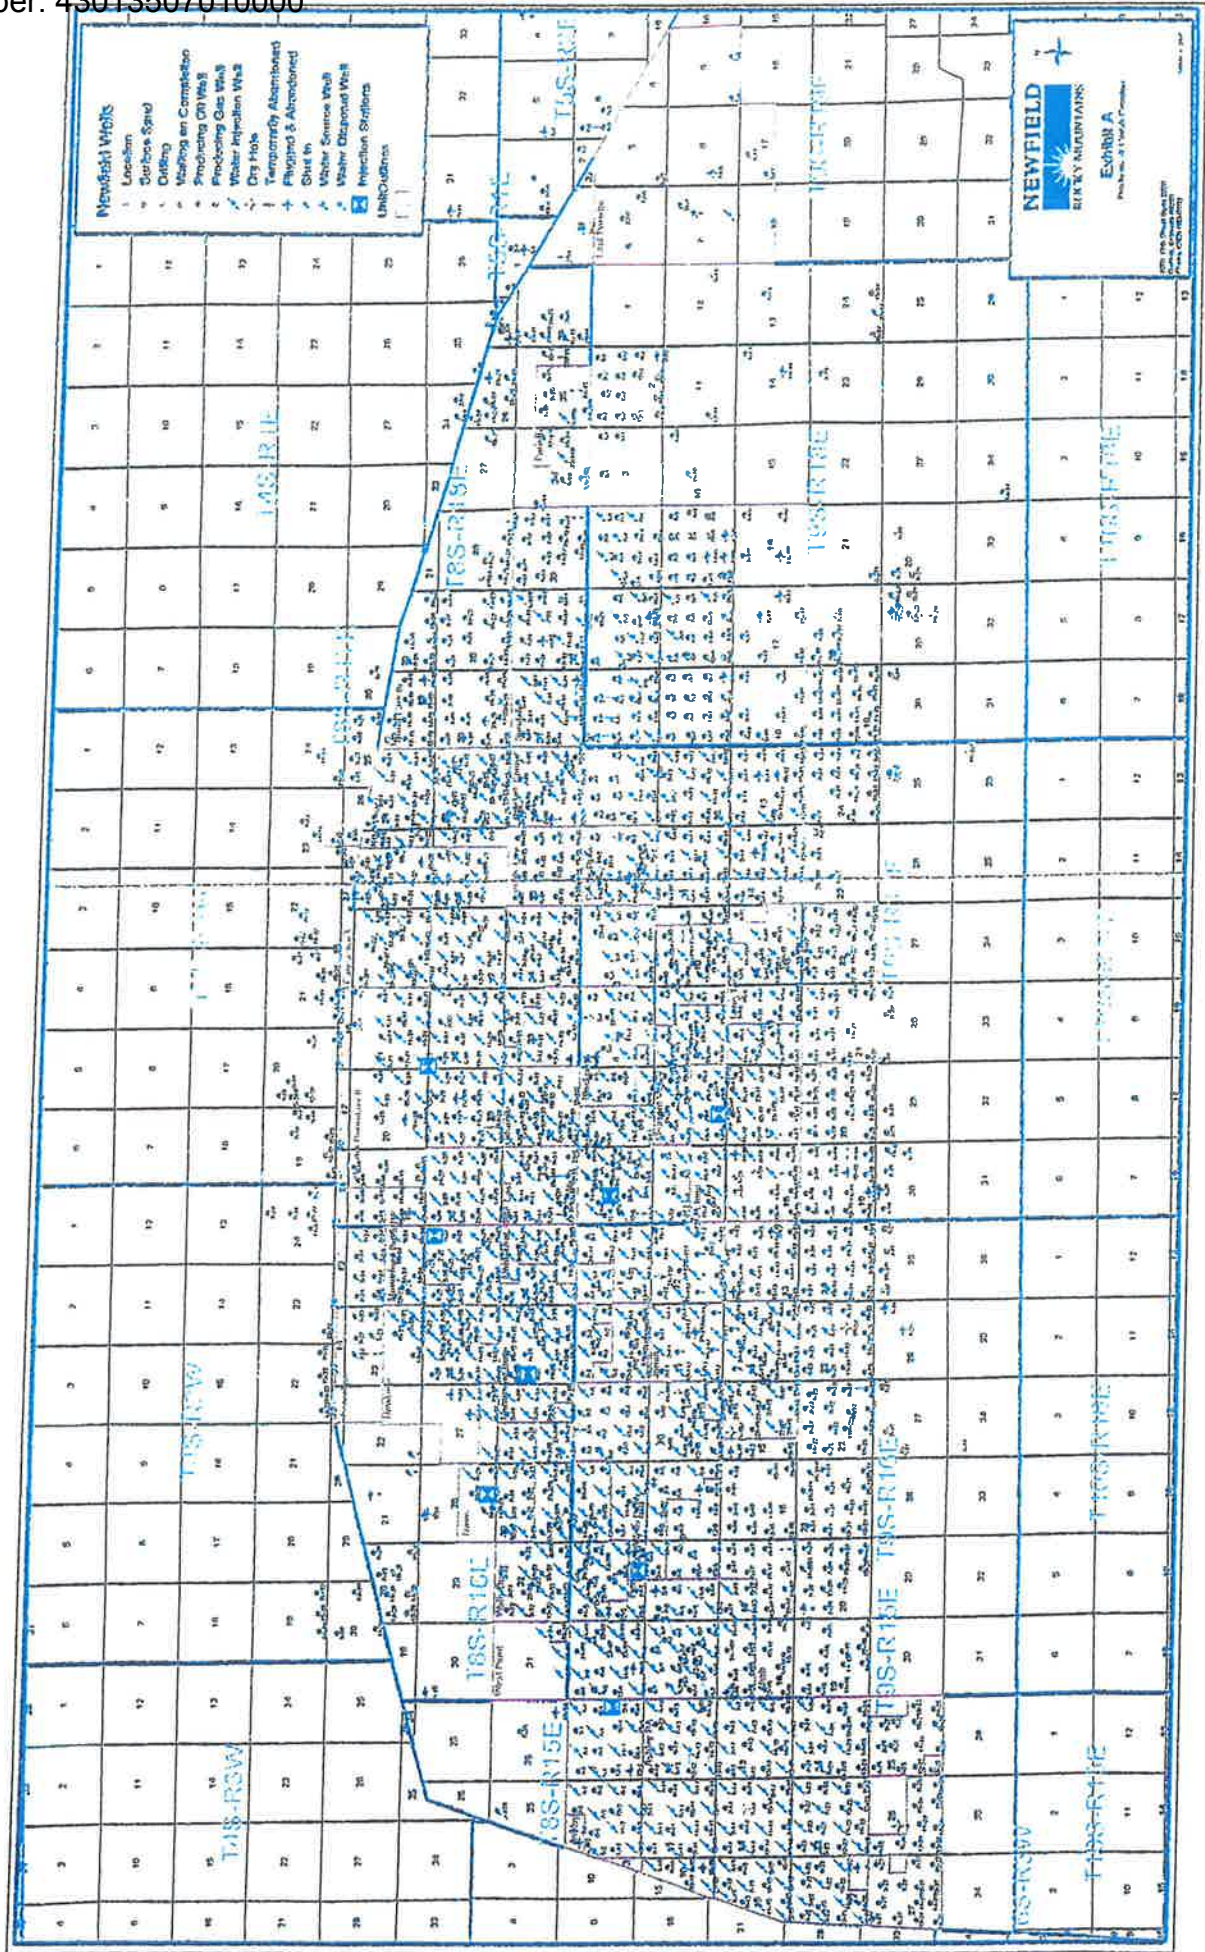




Exhibit "B" Map

**D-17-9-16 (Proposed Well)
13-8-9-16 (Existing Well)**

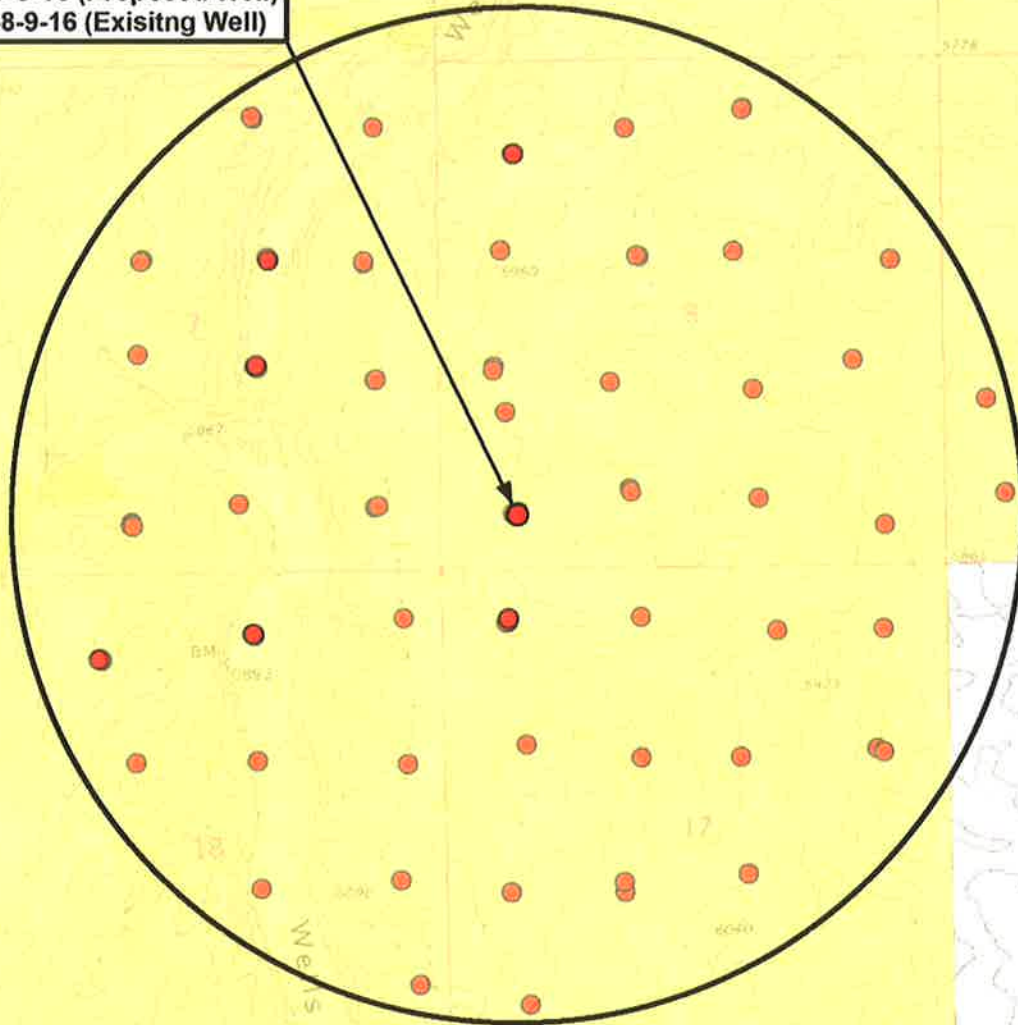

Legend

-  1 Mile Radius
-  Pad Location

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

**D-17-9-16 (Proposed Well)
13-8-9-16 (Existing Well)
SEC. 8, T9S, R16E, S.L.B.&M.
Duchesne County, UT.**

DRAWN BY: C.H.M.
DATE: 01-19-2011
SCALE: 1" = 2,000'

TOPOGRAPHIC MAP

SHEET
D

RECEIVED: May. 11, 2011



NEWFIELD EXPLORATION

**USGS Myton SW (UT)
SECTION 8 T9S, R16E
D-17-9-16**

Wellbore #1

Plan: Design #1

Standard Planning Report

22 April, 2011





Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well D-17-9-16
Company:	NEWFIELD EXPLORATION	TVD Reference:	D-17-9-16 @ 5996.0ft (Newfield Rig)
Project:	USGS Myton SW (UT)	MD Reference:	D-17-9-16 @ 5996.0ft (Newfield Rig)
Site:	SECTION 8 T9S, R16E	North Reference:	True
Well:	D-17-9-16	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		

Site	SECTION 8 T9S, R16E, SEC 8 T9S, R16E			
Site Position:		Northing:	7,188,200.00 ft	Latitude: 40° 2' 44.068 N
From:	Lat/Long	Easting:	2,019,900.00 ft	Longitude: 110° 8' 39.874 W
Position Uncertainty:	0.0 ft	Slot Radius:	"	Grid Convergence: 0.87 °

Well	D-17-9-16, SHL LAT: 40 02 23.10 LONG: -110 08 59.33			
Well Position	+N/-S	-2,121.6 ft	Northing:	7,186,055.78 ft
	+E/-W	-1,513.0 ft	Easting:	2,018,419.24 ft
Position Uncertainty		0.0 ft	Wellhead Elevation:	5,996.0 ft
			Ground Level:	5,984.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	2010/12/29	11.41	65.79	52,297

Design	Design #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	4,850.0	0.0	0.0	132.09

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,402.5	12.04	132.09	1,396.7	-56.3	62.3	1.50	1.50	0.00	132.09	
4,933.5	12.04	132.09	4,850.0	-549.9	608.8	0.00	0.00	0.00	0.00	D-17-9-16 TGT
6,359.9	12.04	132.09	6,245.0	-749.3	829.6	0.00	0.00	0.00	0.00	



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well D-17-9-16
Company:	NEWFIELD EXPLORATION	TVD Reference:	D-17-9-16 @ 5996.0ft (Newfield Rig)
Project:	USGS Myton SW (UT)	MD Reference:	D-17-9-16 @ 5996.0ft (Newfield Rig)
Site:	SECTION 8 T9S, R16E	North Reference:	True
Well:	D-17-9-16	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	1.50	132.09	700.0	-0.9	1.0	1.3	1.50	1.50	0.00
800.0	3.00	132.09	799.9	-3.5	3.9	5.2	1.50	1.50	0.00
900.0	4.50	132.09	899.7	-7.9	8.7	11.8	1.50	1.50	0.00
1,000.0	6.00	132.09	999.3	-14.0	15.5	20.9	1.50	1.50	0.00
1,100.0	7.50	132.09	1,098.6	-21.9	24.3	32.7	1.50	1.50	0.00
1,200.0	9.00	132.09	1,197.5	-31.5	34.9	47.0	1.50	1.50	0.00
1,300.0	10.50	132.09	1,296.1	-42.9	47.5	64.0	1.50	1.50	0.00
1,402.5	12.04	132.09	1,396.7	-56.3	62.3	84.0	1.50	1.50	0.00
1,500.0	12.04	132.09	1,492.0	-69.9	77.4	104.3	0.00	0.00	0.00
1,600.0	12.04	132.09	1,589.8	-83.9	92.9	125.2	0.00	0.00	0.00
1,700.0	12.04	132.09	1,687.6	-97.9	108.4	146.0	0.00	0.00	0.00
1,800.0	12.04	132.09	1,785.4	-111.9	123.9	166.9	0.00	0.00	0.00
1,900.0	12.04	132.09	1,883.2	-125.9	139.3	187.8	0.00	0.00	0.00
2,000.0	12.04	132.09	1,981.0	-139.8	154.8	208.6	0.00	0.00	0.00
2,100.0	12.04	132.09	2,078.8	-153.8	170.3	229.5	0.00	0.00	0.00
2,200.0	12.04	132.09	2,176.6	-167.8	185.8	250.3	0.00	0.00	0.00
2,300.0	12.04	132.09	2,274.4	-181.8	201.2	271.2	0.00	0.00	0.00
2,400.0	12.04	132.09	2,372.2	-195.8	216.7	292.0	0.00	0.00	0.00
2,500.0	12.04	132.09	2,470.0	-209.7	232.2	312.9	0.00	0.00	0.00
2,600.0	12.04	132.09	2,567.8	-223.7	247.7	333.7	0.00	0.00	0.00
2,700.0	12.04	132.09	2,665.6	-237.7	263.1	354.6	0.00	0.00	0.00
2,800.0	12.04	132.09	2,763.4	-251.7	278.6	375.5	0.00	0.00	0.00
2,900.0	12.04	132.09	2,861.2	-265.7	294.1	396.3	0.00	0.00	0.00
3,000.0	12.04	132.09	2,959.0	-279.6	309.6	417.2	0.00	0.00	0.00
3,100.0	12.04	132.09	3,056.8	-293.6	325.1	438.0	0.00	0.00	0.00
3,200.0	12.04	132.09	3,154.6	-307.6	340.5	458.9	0.00	0.00	0.00
3,300.0	12.04	132.09	3,252.4	-321.6	356.0	479.7	0.00	0.00	0.00
3,400.0	12.04	132.09	3,350.2	-335.6	371.5	500.6	0.00	0.00	0.00
3,500.0	12.04	132.09	3,448.0	-349.5	387.0	521.5	0.00	0.00	0.00
3,600.0	12.04	132.09	3,545.8	-363.5	402.4	542.3	0.00	0.00	0.00
3,700.0	12.04	132.09	3,643.6	-377.5	417.9	563.2	0.00	0.00	0.00
3,800.0	12.04	132.09	3,741.4	-391.5	433.4	584.0	0.00	0.00	0.00
3,900.0	12.04	132.09	3,839.2	-405.5	448.9	604.9	0.00	0.00	0.00
4,000.0	12.04	132.09	3,937.0	-419.4	464.4	625.7	0.00	0.00	0.00
4,100.0	12.04	132.09	4,034.8	-433.4	479.8	646.6	0.00	0.00	0.00
4,200.0	12.04	132.09	4,132.6	-447.4	495.3	667.4	0.00	0.00	0.00
4,300.0	12.04	132.09	4,230.4	-461.4	510.8	688.3	0.00	0.00	0.00
4,400.0	12.04	132.09	4,328.2	-475.3	526.3	709.2	0.00	0.00	0.00
4,500.0	12.04	132.09	4,426.0	-489.3	541.7	730.0	0.00	0.00	0.00
4,600.0	12.04	132.09	4,523.8	-503.3	557.2	750.9	0.00	0.00	0.00
4,700.0	12.04	132.09	4,621.6	-517.3	572.7	771.7	0.00	0.00	0.00
4,800.0	12.04	132.09	4,719.4	-531.3	588.2	792.6	0.00	0.00	0.00
4,900.0	12.04	132.09	4,817.2	-545.2	603.7	813.4	0.00	0.00	0.00
4,933.5	12.04	132.09	4,850.0	-549.9	608.8	820.4	0.00	0.00	0.00
D-17-9-16 TGT									
5,000.0	12.04	132.09	4,915.0	-559.2	619.1	834.3	0.00	0.00	0.00
5,100.0	12.04	132.09	5,012.8	-573.2	634.6	855.2	0.00	0.00	0.00




Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well D-17-9-16
Company:	NEWFIELD EXPLORATION	TVD Reference:	D-17-9-16 @ 5996.0ft (Newfield Rig)
Project:	USGS Myton SW (UT)	MD Reference:	D-17-9-16 @ 5996.0ft (Newfield Rig)
Site:	SECTION 8 T9S, R16E	North Reference:	True
Well:	D-17-9-16	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,200.0	12.04	132.09	5,110.6	-587.2	650.1	876.0	0.00	0.00	0.00
5,300.0	12.04	132.09	5,208.4	-601.2	665.6	896.9	0.00	0.00	0.00
5,400.0	12.04	132.09	5,306.2	-615.1	681.0	917.7	0.00	0.00	0.00
5,500.0	12.04	132.09	5,404.0	-629.1	696.5	938.6	0.00	0.00	0.00
5,600.0	12.04	132.09	5,501.8	-643.1	712.0	959.4	0.00	0.00	0.00
5,700.0	12.04	132.09	5,599.6	-657.1	727.5	980.3	0.00	0.00	0.00
5,800.0	12.04	132.09	5,697.4	-671.1	742.9	1,001.1	0.00	0.00	0.00
5,900.0	12.04	132.09	5,795.2	-685.0	758.4	1,022.0	0.00	0.00	0.00
6,000.0	12.04	132.09	5,893.0	-699.0	773.9	1,042.9	0.00	0.00	0.00
6,100.0	12.04	132.09	5,990.8	-713.0	789.4	1,063.7	0.00	0.00	0.00
6,200.0	12.04	132.09	6,088.6	-727.0	804.9	1,084.6	0.00	0.00	0.00
6,300.0	12.04	132.09	6,186.4	-741.0	820.3	1,105.4	0.00	0.00	0.00
6,359.9	12.04	132.09	6,245.0	-749.3	829.6	1,117.9	0.00	0.00	0.00





Project: USGS Myton SW (UT)
 Site: SECTION 8 T9S, R16E
 Well: D-17-9-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.41°

Magnetic Field
 Strength: 52296.8snT
 Dip Angle: 65.79°
 Date: 2010/12/29
 Model: IGRF2010

KOP @ 600'
 DOGLEG RATE 1.5 DEG/100
 TARGET RADIUS IS 75'

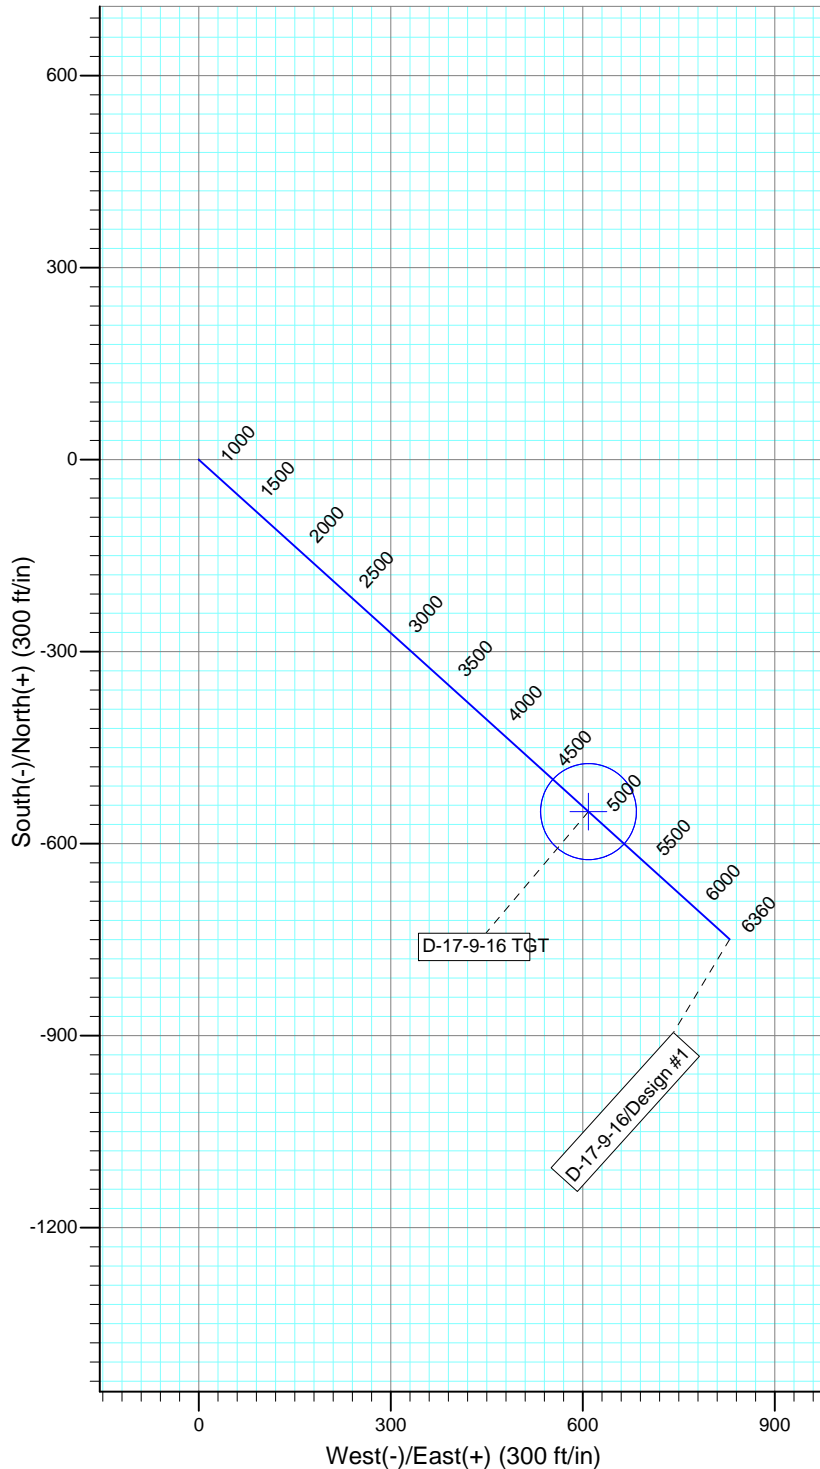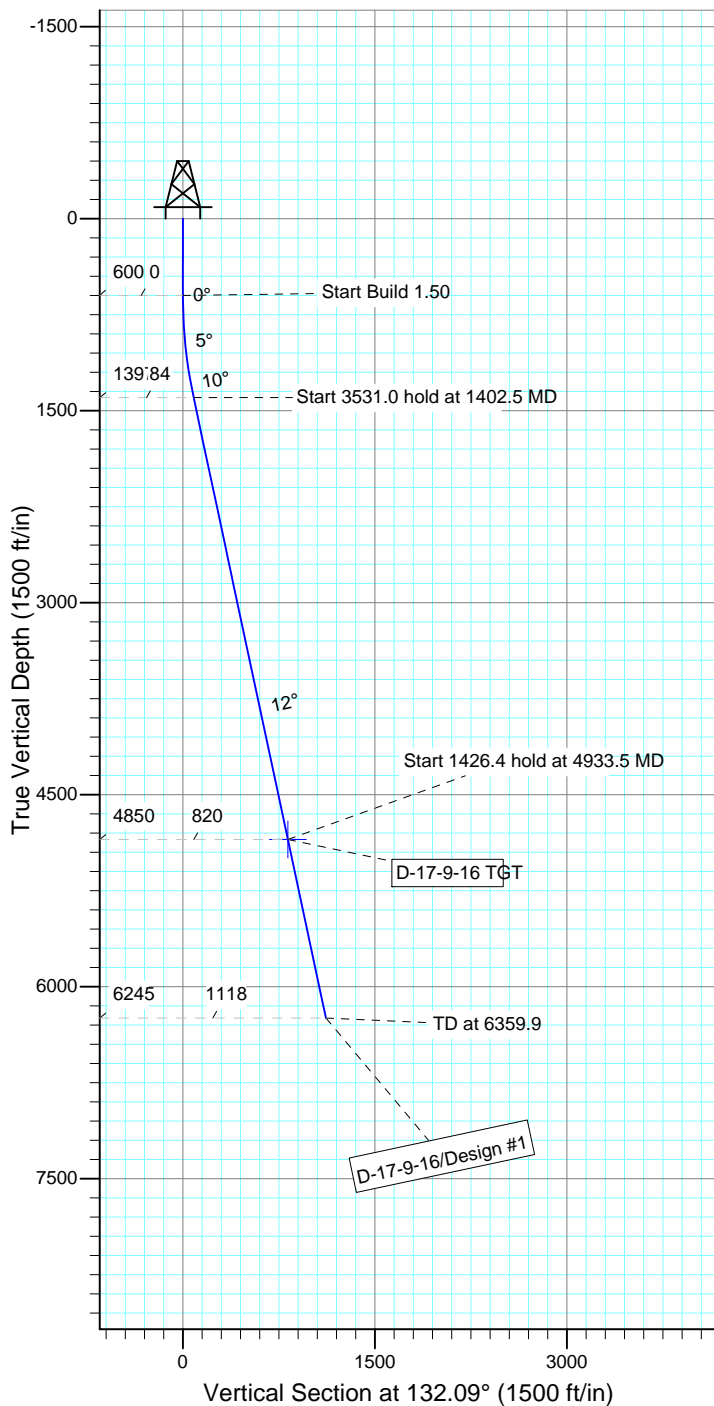

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
D-17-9-16 TGT	4850.0	-549.9	608.8	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1402.5	12.04	132.09	1396.7	-56.3	62.3	1.50	132.09	84.0	
4	4933.5	12.04	132.09	4850.0	-549.9	608.8	0.00	0.00	820.4	D-17-9-16 TGT
5	6359.9	12.04	132.09	6245.0	-749.3	829.6	0.00	0.00	1117.9	



RECEIVED: May. 11, 2011

**NEWFIELD PRODUCTION COMPANY
GMBU D-17-9-16
AT SURFACE: SW/SW SECTION 8, T9S, R16E
DUCHESNE COUNTY, UTAH**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site GMBU D-17-9-16 located in the SW 1/4 SW 1/4 Section 8, T9S, R16E, Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.4 miles \pm to the junction of this highway and UT State Hwy 53; proceed in a southeasterly direction - 6.2 miles \pm to it's junction with an existing dirt road to the southwest; proceed in a southwesterly direction - 7.4 miles \pm to it's junction with an existing road to the east; proceed easterly - 0.1 miles \pm to it's junction with an existing road to the north; proceed notherly - 0.2 miles \pm to it's junction with the access road to the existing 13-8-9-16 well lcoation.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

There is no proposed access road for this location. The proposed well will be drilled directionaly off of the existing 13-8-9-16 well pad. See attached **Topographic Map "B"**.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District
Water Right : 43-10136

Maurice Harvey Pond
Water Right: 47-1358

Neil Moon Pond
Water Right: 43-11787

Newfield Collector Well
Water Right: 47-1817 (A30414DVA, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

8. **ANCILLARY FACILITIES**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT**

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

- a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

- b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP** – Bureau of Land Management.

12. **OTHER ADDITIONAL INFORMATION**

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. MOAC Report #11-054, 4/13/11. Paleontological Resource Survey prepared by, Wade E. Miller, 4/23/11. See attached report cover pages, Exhibit "D".

Surface Flow Line

Newfield requests 1,902' of surface flow line be granted. The Surface Flow Line will consist of up to a 14" bundled pipe consisting of 2-2" poly glycol lines and 1-3" production line. For all new wells, Newfield. **Refer to Topographic Map "C"** for the proposed location of the proposed flow line. Flow lines will be tan and will be constructed using the following procedures:

Clearing and Grading: No clearing or grading of the ROW will be required. The centerline of the proposed route will be staked prior to installation. Flow lines shall be placed as close to existing roads as possible without interfering with normal road travel or road maintenance activities. Due to the proximity of existing facilities, no temporary use or construction/storage areas are anticipated. If necessary, temporary use or construction/storage areas will be identified on a topographic map included in the approved permit.

Installation: The proposed flow lines will be installed 4-6" above the ground. For portions along existing two-track and primary access roads, lengths of pipe will be strung out in the borrow ditch, welded together, and rolled or dragged into place with heavy equipment. For pipelines that are installed cross-country (not along existing or proposed roads), travel along the lines will be infrequent and for maintenance needs only. No installation activities will be performed during periods when the soil is too wet to adequately support installation equipment. If such equipment creates ruts in excess of three (3) inches deep, the soil will be deemed too wet to adequately support the equipment.

Termination and Final Reclamation: After abandonment of the associated production facilities, the flow lines will be cut and removed, and any incidental surface disturbance reclaimed. Reclamation procedures will follow those outlined in the Castle Peak and Eight Mile Flat Reclamation and Weed Management Plan.

Water Disposal

After first production, if the production water meets quality guidelines, it will be transported to the Ashley, Monument Butte, Jonah, South Wells Draw and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project. Water not meeting quality criteria, will be disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), Federally approved surface disposal facilities or at a State of Utah approved surface disposal facilities.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Details of the On-Site Inspection

The proposed GMBU D-17-9-16 was on-sited on 2/24/11. The following were present; Tim Eaton (Newfield Production), Christine Cimiluca (Bureau of Land Management), and Suzanne Grayson (Bureau of Land Management).

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the GMBU D-17-9-16, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the GMBU D-17-9-16, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**
Representative

Name: Tim Eaton
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification

Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #D-17-9-16, Section 8, Township 9S, Range 16E: Lease UTU-74390 Duchesne County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #WYB000493.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

4/27/11
Date

Mandie Crozier
Regulatory Specialist
Newfield Production Company

2-M SYSTEM

Blowout Prevention Equipment Systems

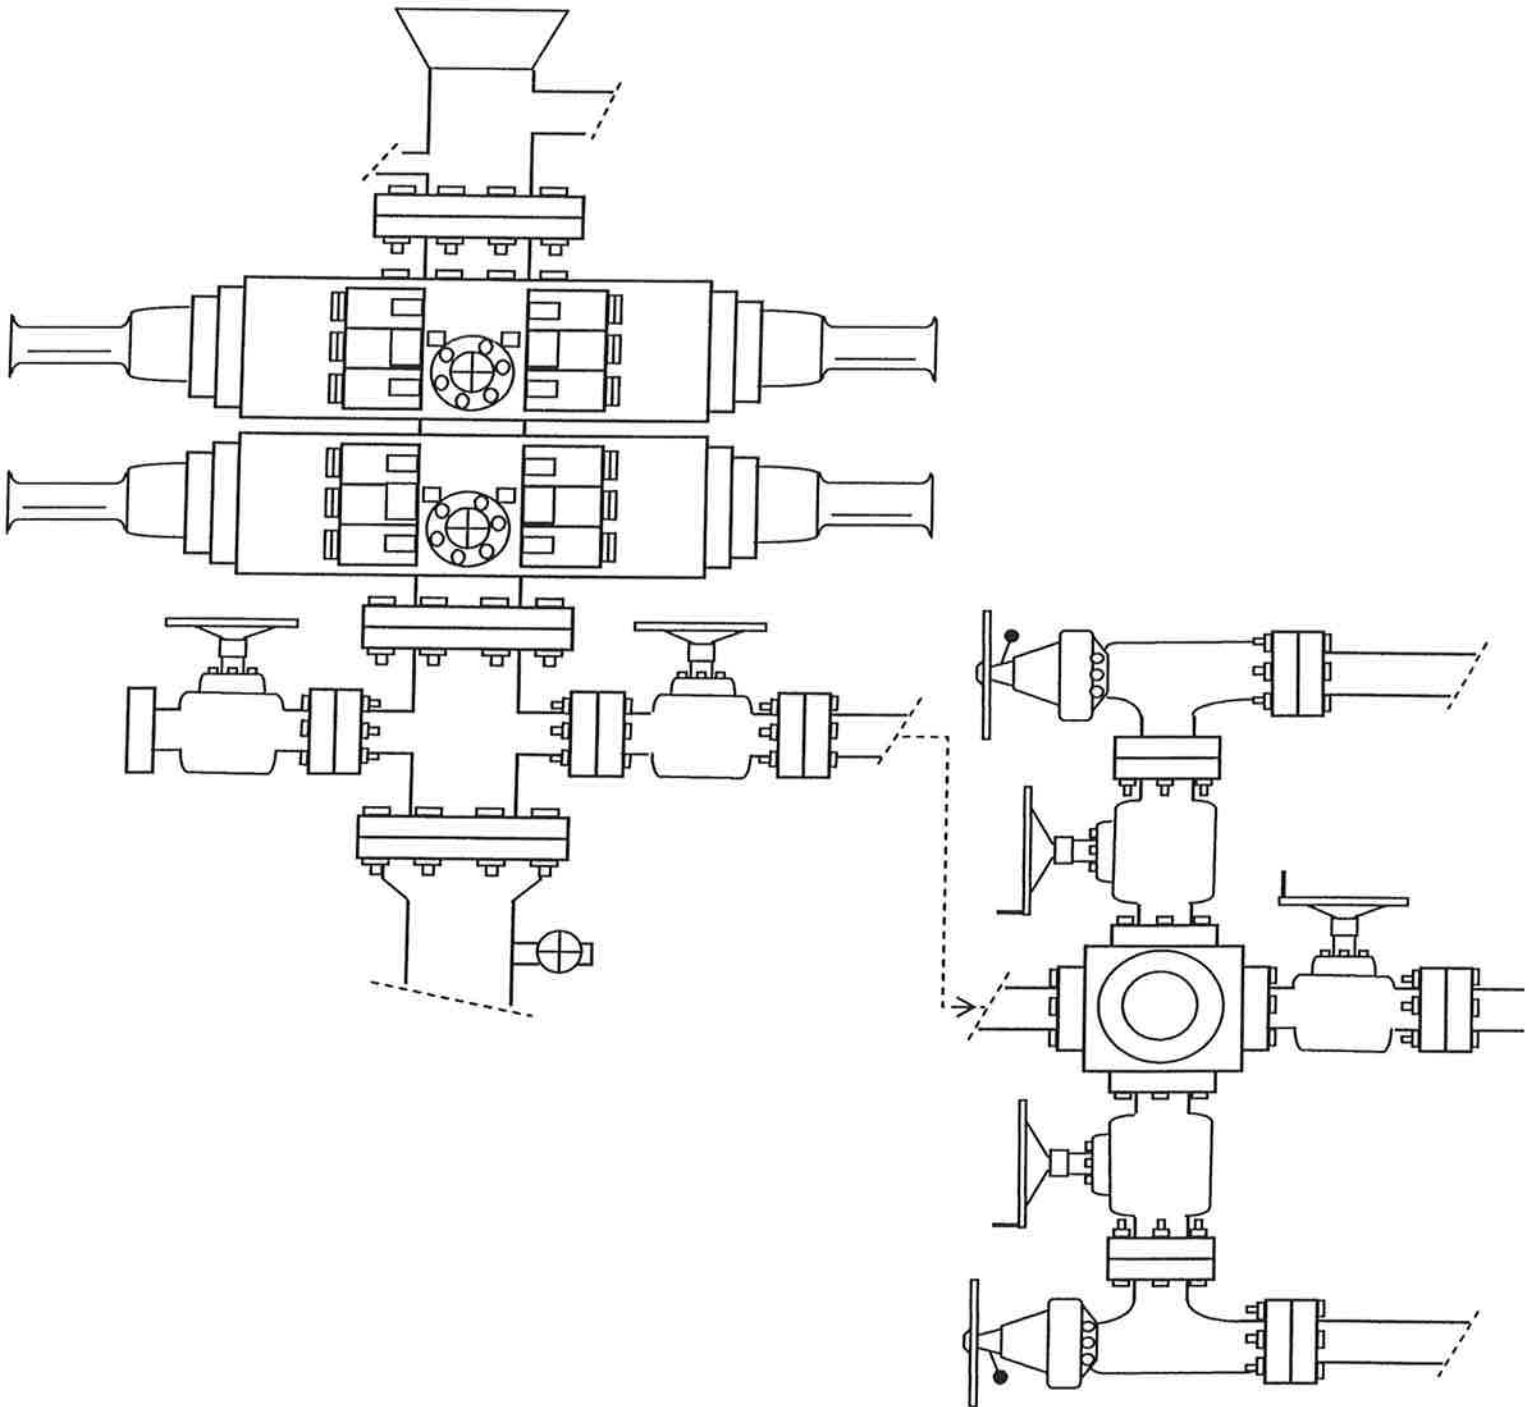


EXHIBIT C

NEWFIELD EXPLORATION COMPANY**WELL PAD INTERFERENCE PLAT****D-17-9-16 (Proposed Well)****13-8-9-16 (Existing Well)***Pad Location: SWSW Section 8, T9S, R16E, S.L.B.&M.***CENTER OF PATTERN FOOTAGES**


D-17-9-16 (PROPOSED)
20' FSL & 1390' FWL

TOP HOLE FOOTAGES

D-17-9-16 (PROPOSED)
578' FSL & 791' FWL

BOTTOM HOLE FOOTAGES

D-17-9-16 (PROPOSED)
209' FNL & 1636' FWL

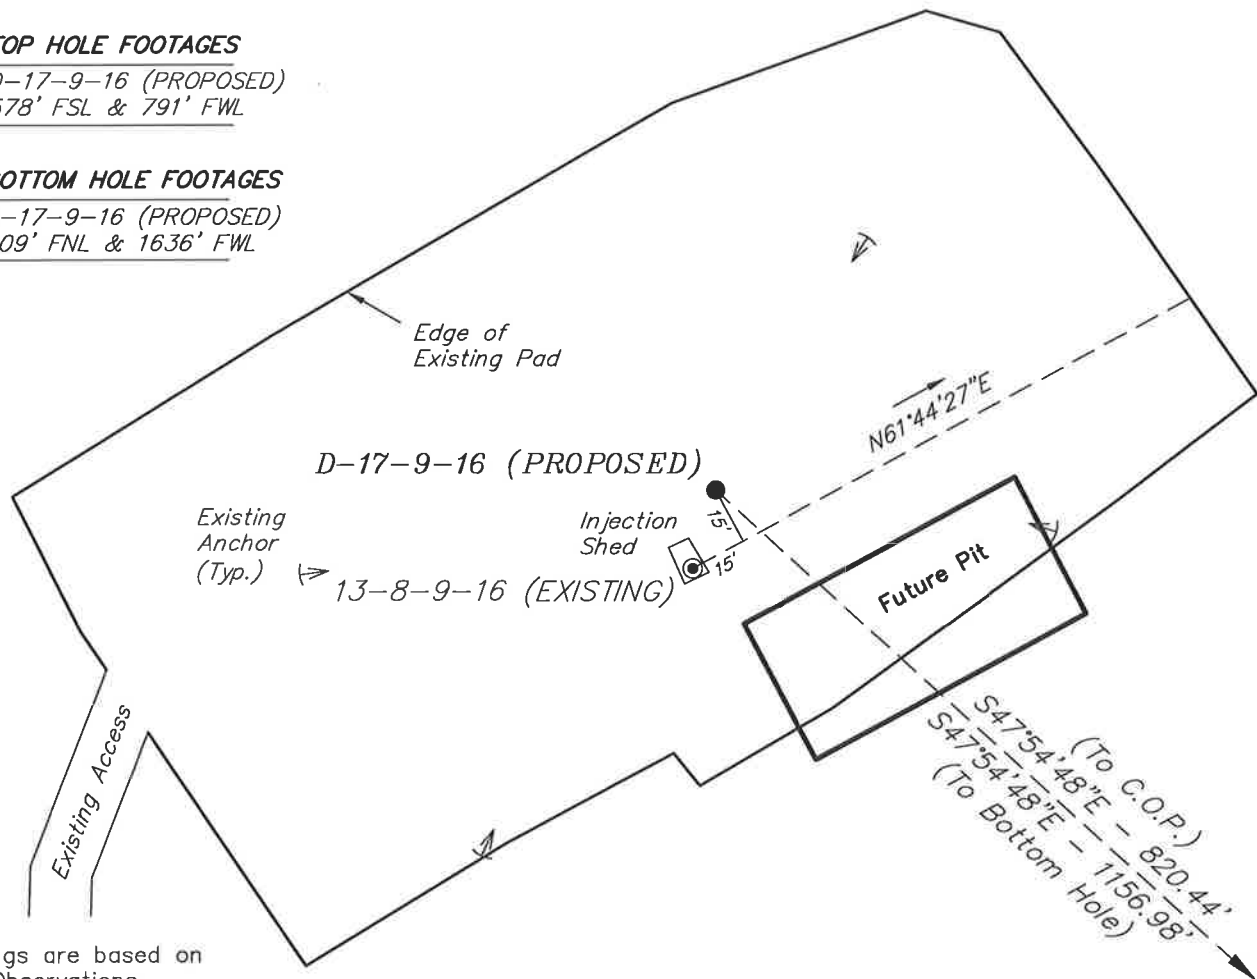**Note:**

Bearings are based on
GPS Observations.

RELATIVE COORDINATES
From Top Hole to C.O.P.

WELL	NORTH	EAST
D-17-9-16	-550'	609'

RELATIVE COORDINATES
From Top Hole to Bottom Hole

WELL	NORTH	EAST
D-17-9-16	-805'	831'

LATITUDE & LONGITUDE
Surface position of Wells (NAD 83)

WELL	LATITUDE	LONGITUDE
D-17-9-16	40° 02' 23.10"	110° 08' 59.33"
13-8-9-16	40° 02' 22.90"	110° 08' 59.41"

SURVEYED BY: T.P. DATE SURVEYED: 11-02-10
 DRAWN BY: M.W. DATE DRAWN: 01-19-11
 SCALE: 1" = 50' REVISED:

Tri State (435) 781-2501
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

RECEIVED: May. 11, 2011


NEWFIELD EXPLORATION COMPANY

LOCATION LAYOUT

D-17-9-16 (Proposed Well)

13-8-9-16 (Existing Well)

Pad Location: SWSW Section 8, T9S, R16E, S.L.B.&M.

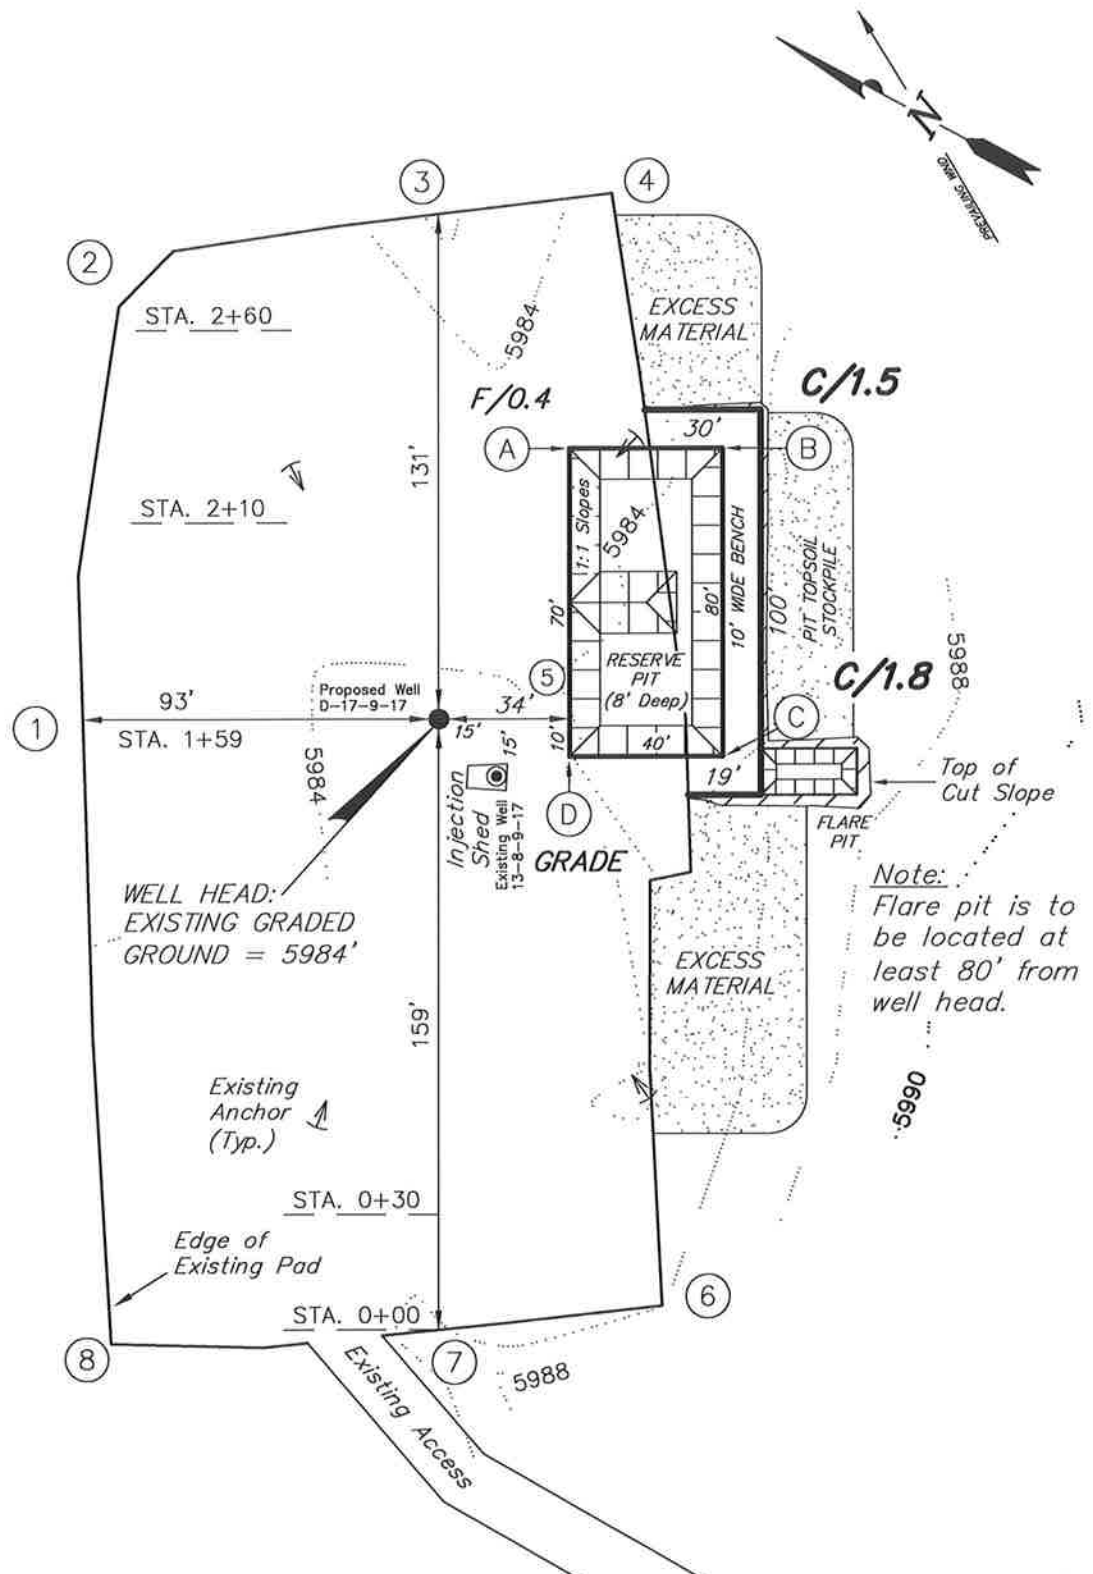

SURVEYED BY: T.P.

DATE SURVEYED: 11-02-10

DRAWN BY: M.W.

DATE DRAWN: 01-19-11

SCALE: 1" = 50'

REVISED:

Tri State
Land Surveying, Inc.

(435) 781-2501

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

RECEIVED: May. 11, 2011




NEWFIELD EXPLORATION COMPANY

CROSS SECTIONS

D-17-9-16 (Proposed Well)

13-8-9-16 (Existing Well)

Pad Location: SWSW Section 8, T9S, R16E, S.L.B.&M.

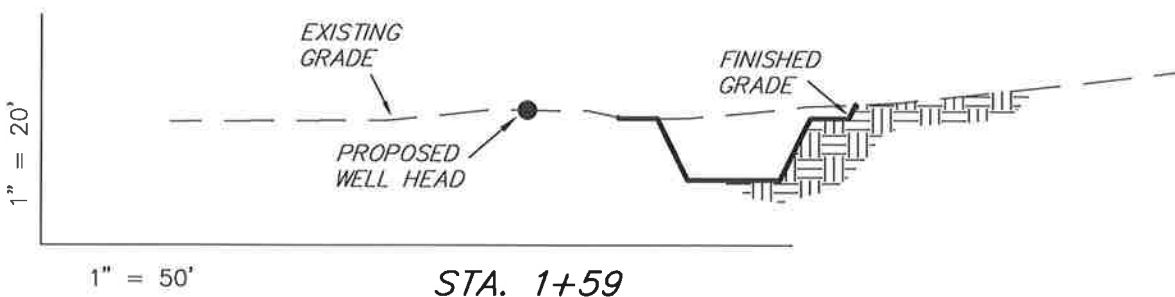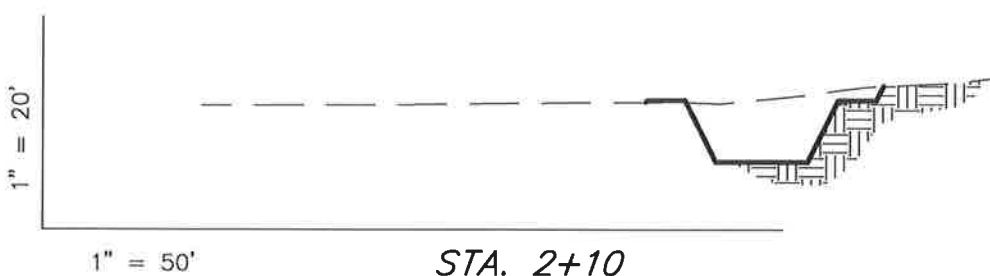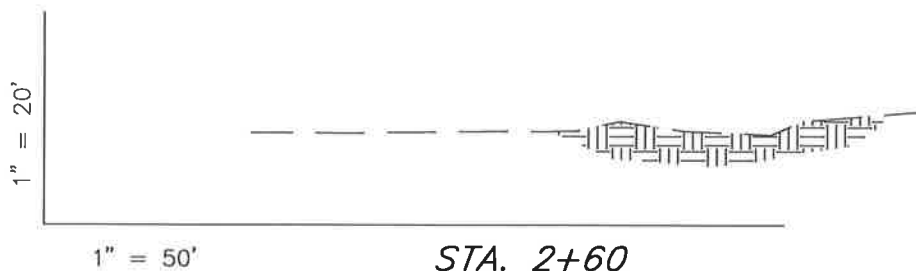

NOTE:
UNLESS OTHERWISE NOTED
CUT SLOPES ARE AT 1:1
FILL SLOPES ARE AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES (No Shrink or swell adjustments have been used) (Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	40	10	Topsoil is not included in Pad Cut	30
PIT	640	0		640
TOTALS	680	10	130	670

SURVEYED BY: T.P.

DATE SURVEYED: 11-02-10

DRAWN BY: M.W.

DATE DRAWN: 01-19-11

SCALE: 1" = 50'

REVISED:

Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

RECEIVED: May. 11, 2011


NEWFIELD EXPLORATION COMPANY

TYPICAL RIG LAYOUT

D-17-9-16 (Proposed Well)

13-8-9-16 (Existing Well)

Pad Location: SWSW Section 8, T9S, R16E, S.L.B.&M.

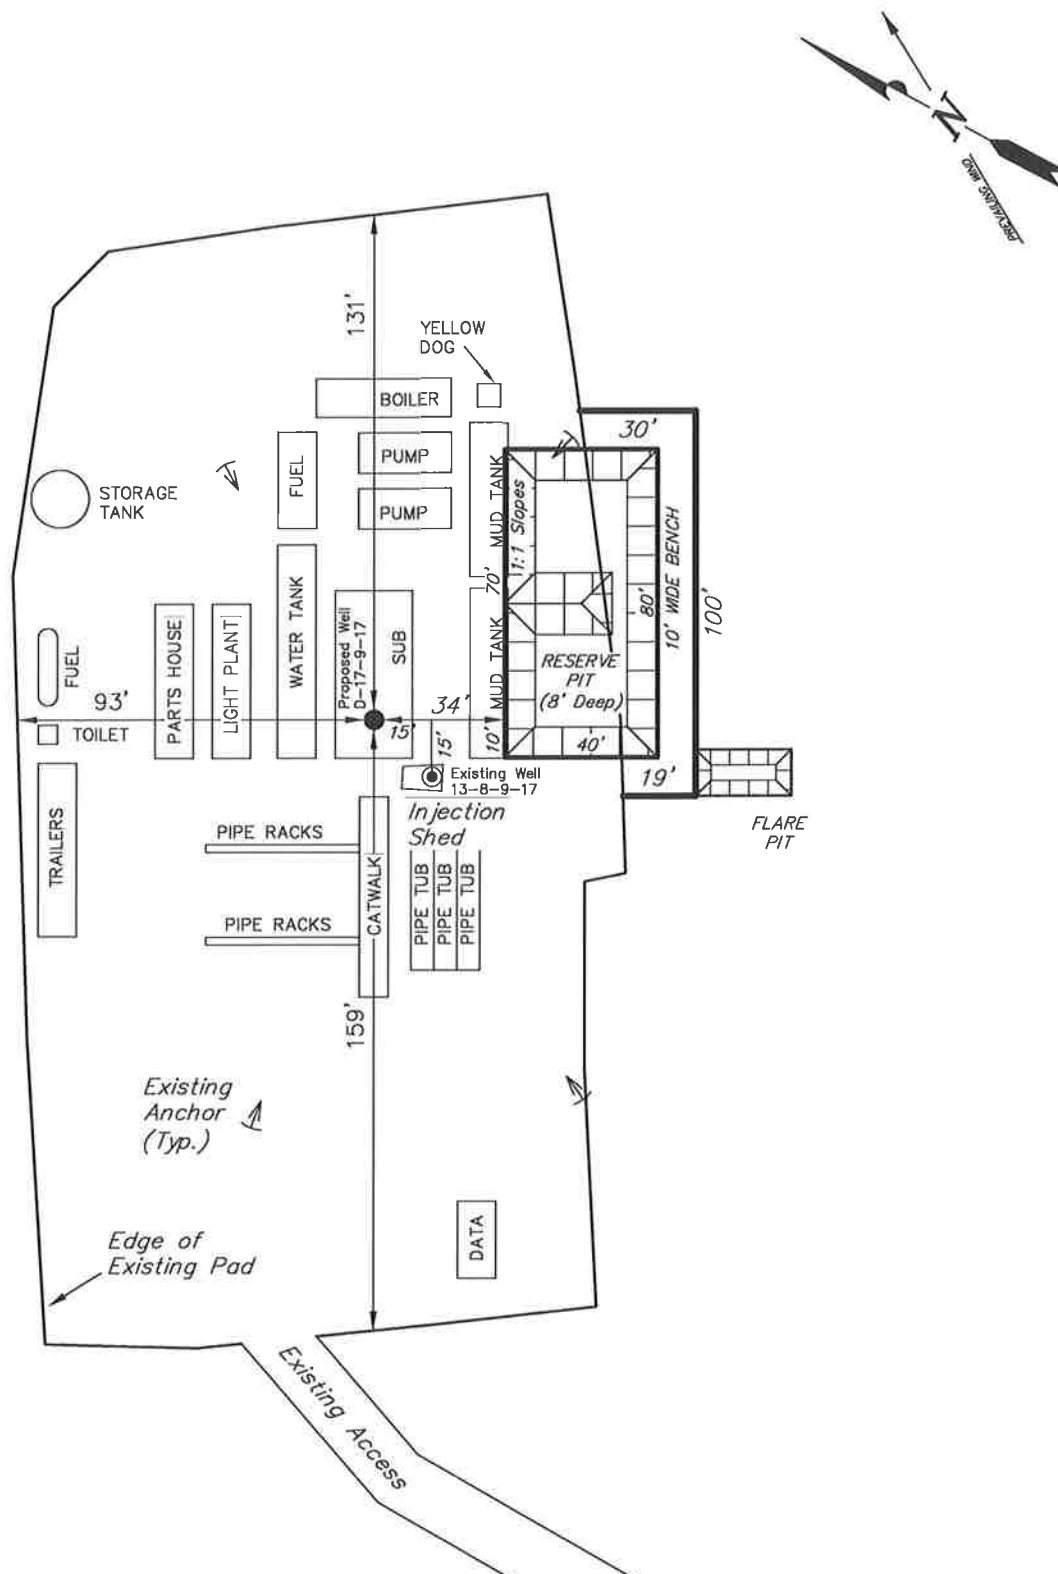

SURVEYED BY: T.P.	DATE SURVEYED: 11-02-10
DRAWN BY: M.W.	DATE DRAWN: 01-19-11
SCALE: 1" = 50'	REVISED:

Tri State
Land Surveying, Inc.

(435) 781-2501

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

RECEIVED: May. 11, 2011

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:

3160

(UT-922)

April 29, 2011

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2011 Plan of Development Greater Monument
Butte Unit, Duchesne and Uintah Counties,
Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2011 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

API #	WELL NAME	LOCATION
43-013-50692	GMBU S-3-9-16	Sec 03 T09S R16E 0648 FSL 0686 FEL
	BHL	Sec 03 T09S R16E 1451 FSL 1492 FEL
43-013-50693	GMBU U-12-9-15	Sec 13 T09S R15E 0864 FNL 0347 FEL
	BHL	Sec 12 T09S R15E 0252 FSL 0009 FEL
43-013-50694	GMBU U-33-8-16	Sec 03 T09S R16E 0782 FNL 0769 FWL
	BHL	Sec 33 T08S R16E 0269 FSL 0265 FEL
43-013-50695	GMBU X-34-8-16	Sec 03 T09S R16E 0769 FNL 0786 FWL
	BHL	Sec 34 T08S R16E 0258 FSL 1508 FWL
43-013-50696	GMBU R-3-9-16	Sec 03 T09S R16E 0538 FSL 2028 FEL
	BHL	Sec 03 T09S R16E 1583 FSL 2464 FWL
43-013-50697	GMBU B-10-9-16	Sec 03 T09S R16E 0539 FSL 2008 FEL
	BHL	Sec 10 T09S R16E 0262 FNL 0930 FEL
43-013-50698	GMBU W-7-9-16	Sec 18 T09S R16E 0891 FNL 1589 FWL
	BHL	Sec 07 T09S R16E 0061 FSL 2414 FEL
43-013-50700	GMBU V-7-9-16	Sec 18 T09S R16E 0661 FNL 1979 FEL
	BHL	Sec 07 T09S R16E 0262 FSL 0977 FEL

RECEIVED: May. 11, 2011

API #	WELL NAME	LOCATION
43-013-50701	GMBU D-17-9-16	Sec 08 T09S R16E 0578 FSL 0791 FWL BHL Sec 17 T09S R16E 0209 FNL 1636 FWL
43-013-50702	GMBU D-10-9-16	Sec 03 T09S R16E 0644 FSL 0834 FWL BHL Sec 10 T09S R16E 0204 FNL 1783 FWL
43-013-50703	GMBU G-8-9-16	Sec 08 T09S R16E 0986 FNL 0792 FWL BHL Sec 08 T09S R16E 1592 FNL 1737 FWL
43-013-50704	GMBU C-8-9-16	Sec 05 T09S R16E 0674 FSL 1983 FWL BHL Sec 08 T09S R16E 0221 FNL 2360 FEL
43-013-50705	GMBU R-5-9-16	Sec 05 T09S R16E 0695 FSL 1988 FWL BHL Sec 05 T09S R16E 1308 FSL 2357 FEL
43-013-50706	GMBU W-33-8-16	Sec 04 T09S R16E 0526 FNL 1933 FEL BHL Sec 33 T08S R16E 0228 FSL 2531 FWL

This office has no objection to permitting the wells at this time.


Michael L. Coulthard

Digitally signed by Michael L. Coulthard
DN: cn=Michael L. Coulthard, o=Bureau of Land
Management, ou=Branch of Minerals,
email=Michael_Coulthard@blm.gov, c=US
Date: 2011.04.29 11:12:00 -06'00'

bcc: File - Greater Monument Butte Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:4-29-11


RECEIVED: May. 11, 2011

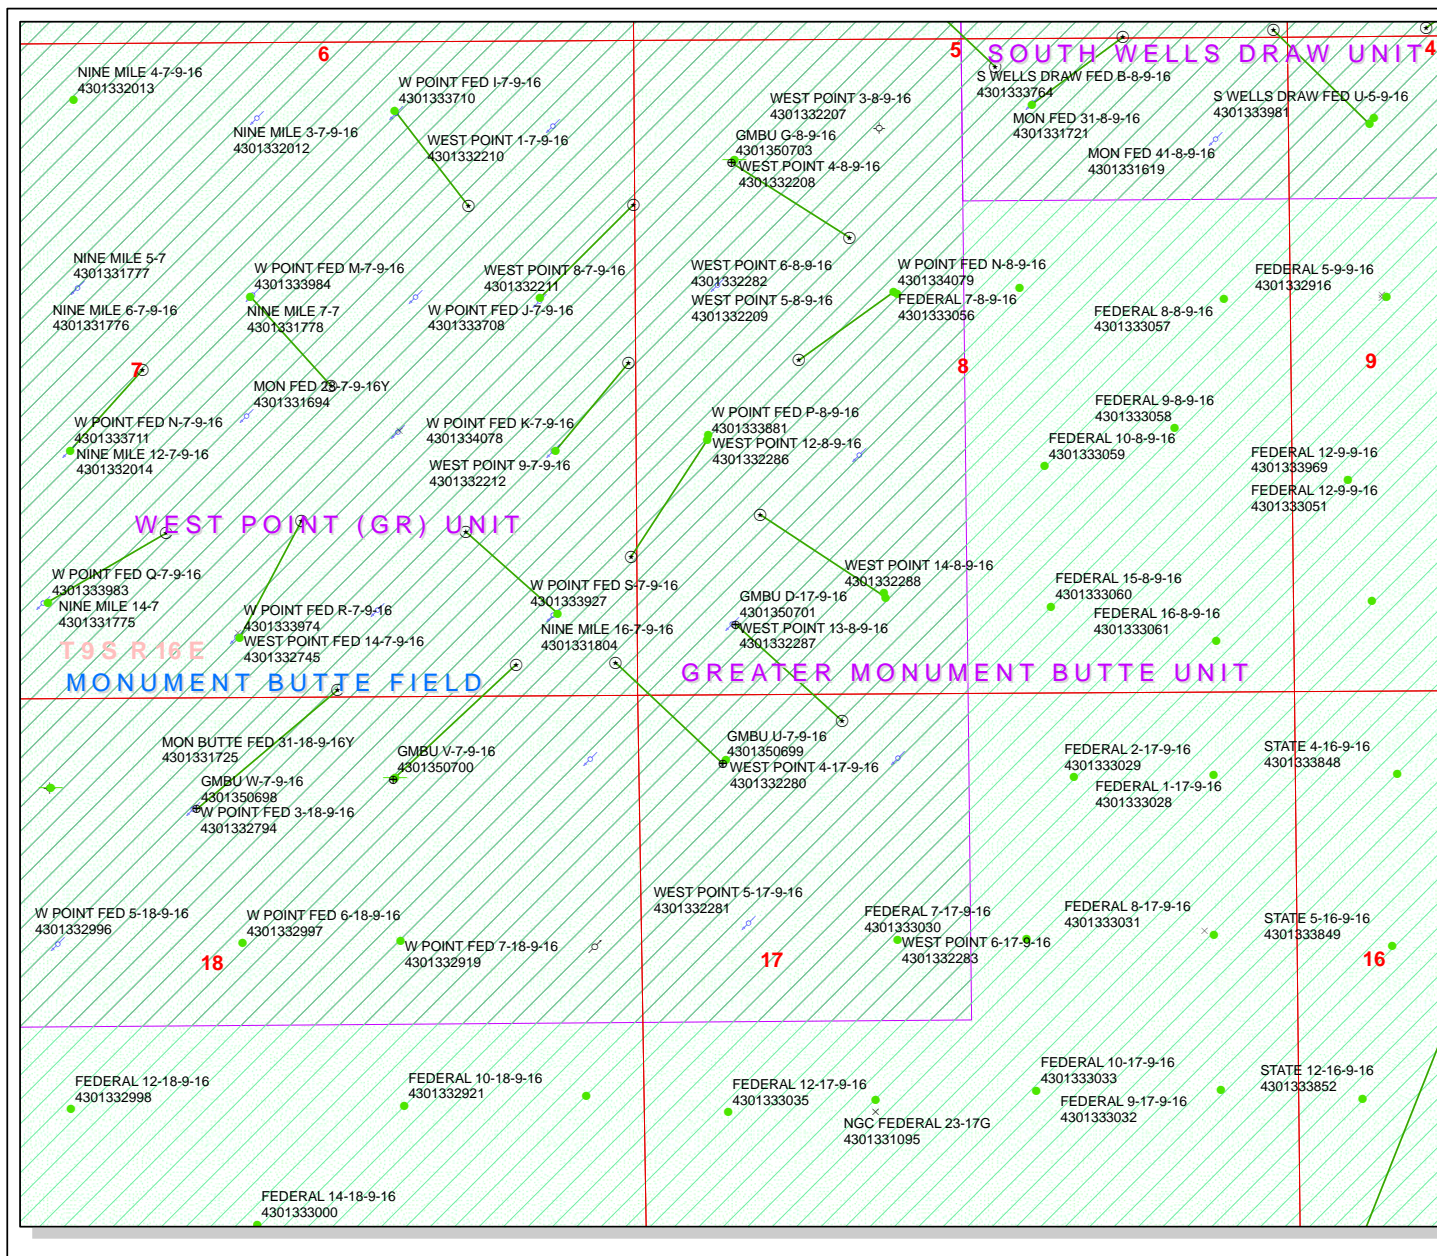

API Number: 4301350701
Well Name: GMBU D-17-9-16
Township T0.9 . Range R1.6 . Section 08
Meridian: SLBM
Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared:
 Map Produced by Diana Mason

Units	Wells Query
STATUS	STATUS
ACTIVE	APD - Approved Permit
EXPLORATORY	DRL - Spudded (Drilling Commenced)
GAS STORAGE	GIW - Gas Injection
PP OIL	GS - Gas Storage
PP SECONDARY	LA - Location Abandoned
PI OIL	LOC - New Location
PP GAS	OPS - Operation Suspended
PP GEOTHERMAL	PA - Plugged Abandoned
PP OIL	PGW - Producing Gas Well
SECONDARY	POW - Producing Oil Well
TERMINATED	RET - Returned APD
Fields	SGW - Shut-in Gas Well
STATUS	SOW - Shut-in Oil Well
Unknown	TA - Temp. Abandoned
ABANDONED	TW - Test Well
ACTIVE	WDW - Water Disposal
COMBINED	WIW - Water Injection Well
INACTIVE	WSW - Water Supply Well
STORAGE	
TERMINATED	
Sections	
Township	





VIA ELECTRONIC DELIVERY

May 11, 2011

State of Utah, Division of Oil, Gas and Mining
ATTN: Diana Mason
P.O. Box 145801
Salt Lake City, UT 84114-5801

RE: Directional Drilling
GMBU D-17-9-16
Greater Monument Butte (Green River) Unit

Surface Hole: T9S-R16E Section 8: SWSW (UTU-74390)
578' FSL 791' FWL

At Target: T9S-R16E Section 17: NENW (UTU-74390)
209' FNL 1636'' FWL

Duchesne County, Utah

Dear Ms. Mason:

Pursuant to the filing by Newfield Production Company (NPC) of an Application for Permit to Drill the above referenced well dated 4/28/11, a copy of which is attached, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole and target locations of this well are both within the boundaries of the Greater Monument Butte Unit (UTU-87538X), of which Newfield certifies that it is the operator. Further, Newfield certifies that all lands within 460 feet of the entire directional well bore are within the Greater Monument Butte Unit.

NPC is permitting this well as a directional well in order to mitigate surface disturbance by utilizing pre-existing roads and pipelines.

NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please contact the undersigned at 303-383-4197 or by email at sgillespie@newfield.com. Your consideration in this matter is greatly appreciated.

Sincerely,
Newfield Production Company

A handwritten signature in blue ink, appearing to read "Shane Gillespie".

Shane Gillespie
Land Associate

Form 3160-3
(August 2007)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER


FORM APPROVED
OMB No. 1004-0137
Expires July 31, 2010

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU-74390
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name NA
2. Name of Operator Newfield Production Company		7. If Unit or CA Agreement, Name and No. Greater Monument Butte
3a. Address Route #3 Box 3630, Myton UT 84052		8. Lease Name and Well No. GMBU D-17-9-16
3b. Phone No. (include area code) (435) 646-3721		9. API Well No.
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface SW/SW 578' FSL 791' FWL Sec. 8, T9S R16E (UTU-74390) At proposed prod. zone NE/NW 209' FNL 1636' FWL Sec. 17, T9S R16E (UTU-74390)		10. Field and Pool, or Exploratory Monument Butte
14. Distance in miles and direction from nearest town or post office* Approximately 15.4 miles southwest of Myton, UT		11. Sec., T. R. M. or Blk. and Survey or Area Sec. 8, T9S R16E
15. Distance from proposed* location to nearest property or lease line, ft. Approx. 1004' f/lse, NA f/unit (Also to nearest drig. unit line, if any)	16. No. of acres in lease 2,037.19	17. Spacing Unit dedicated to this well 20 Acres
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 730'	19. Proposed Depth 6,360'	20. BLM/BIA Bond No. on file WYB000493
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5984' GL	22. Approximate date work will start* 2/25/11	23. Estimated duration (7) days from SPUD to rig release

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, must be attached to this form:

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the BLM. |
|---|---|

25. Signature 	Name (Printed Typed) Mandie Crozier	Date 4/23/11
Title Regulatory Specialist		
Approved by (Signature)	Name (Printed Typed)	Date
Title	Office	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



(Continued on page 2)

*(Instructions on page 2)

T9S, R16E, S.L.B.&M.

NEWFIELD EXPLORATION COMPANY

TARGET BOTTOM HOLE, D-17-9-16,
LOCATED AS SHOWN IN THE NE 1/4 NW
1/4 OF SECTION 17, T9S, R16E,
S.L.B.&M. DUCHESNE COUNTY, UTAH.

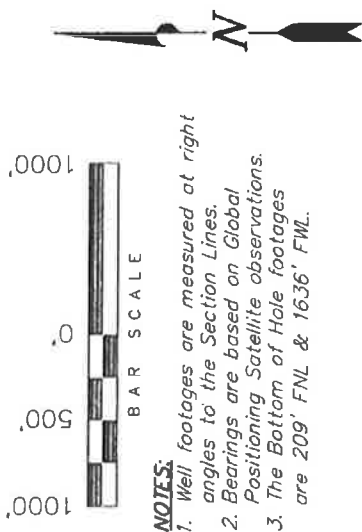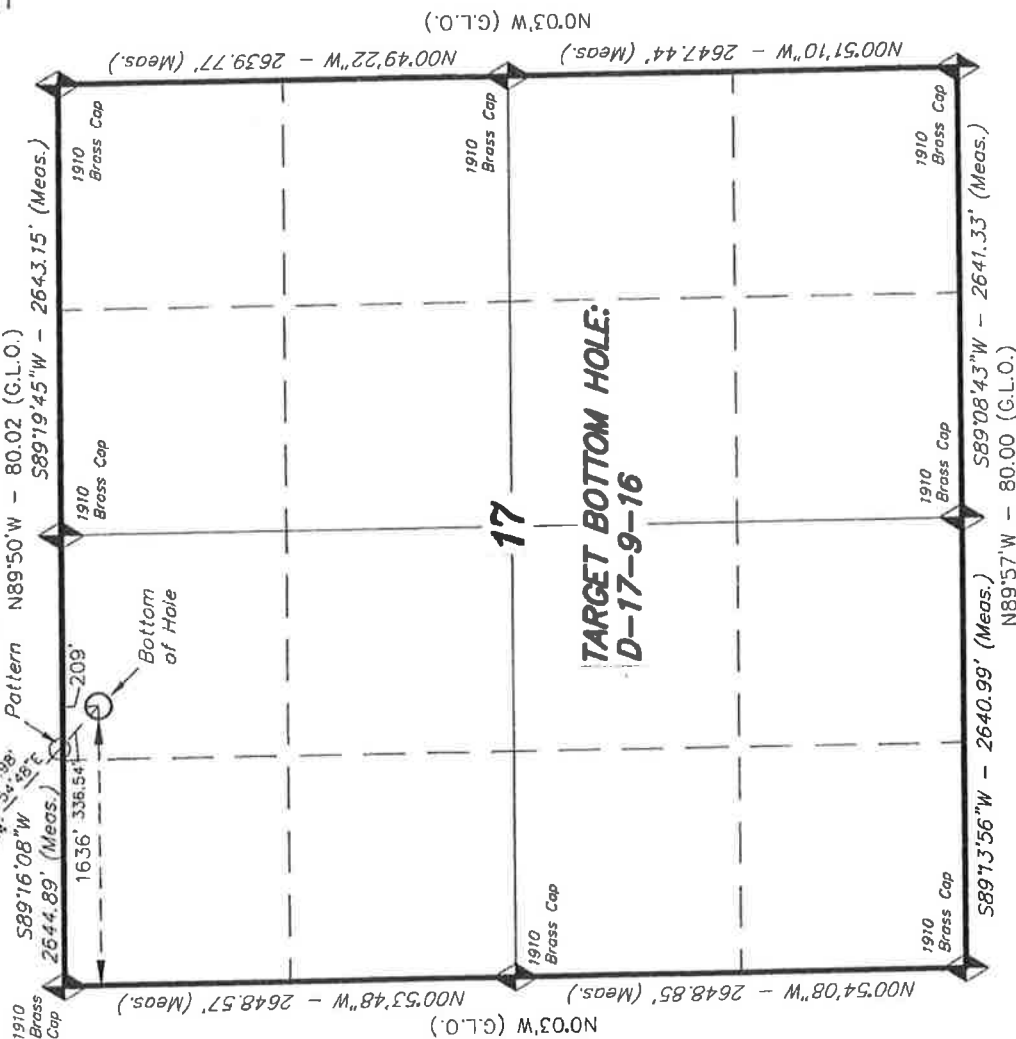

- NOTES:**
1. Well footages are measured at right angles to the Section Lines.
 2. Bearings are based on Global Positioning Satellite observations.
 3. The Bottom of Hole footages are 209' FNL & 1636' FWL.

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

STACY W. STEWART
REGISTERED LAND SURVEYOR
RENEWAL NO. 189377
STATE OF UTAH

TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501

DATE SURVEYED: 11-02-10	SURVEYED BY: T.P.
DATE DRAWN: 01-19-11	DRAWN BY: M.W.
REVISED:	SCALE: 1" = 1000'

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV; Elevations are base on
LOCATION: an N.G.S. OPUS Correction.
LAT. 40°04'09.56" LONG. 110°00'43.28"
(Tristate Aluminum Cap) Elev. 5281.57'

Access Road Map



Legend

— Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



**Tri State
Land Surveying, Inc.**

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518

N



NEWFIELD EXPLORATION COMPANY

D-17-9-16 (Proposed Well)
13-8-9-16 (Existing Well)
SEC. 8, T9S, R16E, S.L.B.&M.
Duchesne County, UT.

DRAWN BY: C.H.M.
DATE: 01-19-2011
SCALE: 1" = 2,000'

TOPOGRAPHIC MAP

SHEET
B

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 4/28/2011**API NO. ASSIGNED:** 43013507010000**WELL NAME:** GMBU D-17-9-16**OPERATOR:** NEWFIELD PRODUCTION COMPANY (N2695)**PHONE NUMBER:** 435 646-4825**CONTACT:** Mandie Crozier**PROPOSED LOCATION:** SWSW 08 090S 160E**Permit Tech Review:** ☒**SURFACE:** 0578 FSL 0791 FWL**Engineering Review:** ☐**BOTTOM:** 0209 FNL 1636 FWL**Geology Review:** ☒**COUNTY:** DUCHESNE**LATITUDE:** 40.03977**LONGITUDE:** -110.14919**UTM SURF EASTINGS:** 572585.00**NORTHINGS:** 4432307.00**FIELD NAME:** MONUMENT BUTTE**LEASE TYPE:** 1 - Federal**LEASE NUMBER:** UTU-74390**PROPOSED PRODUCING FORMATION(S):** GREEN RIVER**SURFACE OWNER:** 1 - Federal**COALBED METHANE:** NO**RECEIVED AND/OR REVIEWED:**☒ **PLAT**☒ **Bond:** FEDERAL - WYB000493☐ **Potash**☐ **Oil Shale 190-5**☐ **Oil Shale 190-3**☐ **Oil Shale 190-13**☒ **Water Permit:** 437478☐ **RDCC Review:**☐ **Fee Surface Agreement**☐ **Intent to Commingle****Commingle Approved****LOCATION AND SITING:**☐ **R649-2-3.****Unit:** GMBU (GRRV)☐ **R649-3-2. General**☐ **R649-3-3. Exception**☒ **Drilling Unit****Board Cause No:** Cause: 213-11**Effective Date:** 11/30/2009**Siting:** Suspends General Siting☒ **R649-3-11. Directional Drill****Comments:** Presite Completed**Stipulations:**
4 - Federal Approval - dmason
15 - Directional - dmason
27 - Other - bhill**RECEIVED:** May. 11, 2011



GARY R. HERBERT
Governor

GREGORY S. BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: GMBU D-17-9-16
API Well Number: 43013507010000
Lease Number: UTU-74390
Surface Owner: FEDERAL
Approval Date: 5/11/2011

Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause: 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels at 801-538-5284 (please leave a voicemail message if not available)
OR
submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <http://oilgas.ogm.utah.gov>

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

Approved By:

A handwritten signature in black ink, appearing to read "J. Rogers", written over a horizontal line.

For John Rogers
Associate Director, Oil & Gas

RECEIVED

APR 29 2011

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0137
Expires July 31, 2010

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU-74390
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name NA
2. Name of Operator Newfield Production Company		7. If Unit or CA Agreement, Name and No. Greater Monument Butte
3a. Address Route #3 Box 3630, Myton UT 84052		8. Lease Name and Well No. GMBU D-17-9-16
3b. Phone No. (include area code) (435) 646-3721		9. API Well No. 43-013-50701
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface SW/SW 578' FSL 791' FWL Sec. 8, T9S R16E (UTU-74390) At proposed prod. zone NE/NW 209' FNL 1636' FWL Sec. 17, T9S R16E (UTU-74390)		10. Field and Pool, or Exploratory Monument Butte
11. Sec., T. R. M. or Blk. and Survey or Area Sec. 8, T9S R16E		12. County or Parish Duchesne
13. State UT		14. Distance in miles and direction from nearest town or post office* Approximately 15.4 miles southwest of Myton, UT
15. Distance from proposed* location to nearest property or lease line, ft. Approx. 1004' f/lse, NA f/unit (Also to nearest drig. unit line, if any)	16. No. of acres in lease 2,037.19	17. Spacing Unit dedicated to this well 20 Acres
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 730'	19. Proposed Depth 6,360'	20. BLM/BIA Bond No. on file WYB000493
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5984' GL	22. Approximate date work will start* 3rd Oct. 2011	23. Estimated duration (7) days from SPUD to rig release

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, must be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the BLM.

25. Signature <i>Mandie Crozier</i>	Name (Printed/Typed) Mandie Crozier	Date 4/23/11
Title Regulatory Specialist		
Approved by (Signature) <i>Naomi Hatch</i>	Name (Printed/Typed) Naomi Hatch	Date AUG 25 2011
Title Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

RECEIVED

*(Instructions on page 2)

SEP 06 2011

DIV. OF OIL, GAS & MINING

UDOGM

NOS 2-2-11

AFMSS# 115X503354

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Newfield Production Company
Well No: GMBU D-17-9-16
API No: 43-013-50701

Location: SWSW Sec. 8, T9S, R16E
Lease No: UTU-74390
Agreement: Greater Monument Butte Unit

OFFICE NUMBER: (435) 781-4400

OFFICE FAX NUMBER: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify Environmental Scientist)	- Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	- Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	- Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to running casing and cementing all casing strings to: ut_vn_opreport@blm.gov .
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

- All new and replacement internal combustion gas field engines of less than or equal to 300 design-rated horsepower must not emit more than 2 gms of NO_x per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower.
- All and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 gms of NO_x per horsepower-hour.
- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

Wildlife

- Construction and drilling is not allowed within habitat from May 1st – June 15th to minimize impacts during Mountain plover nesting.
- Construction and drilling is not allowed within habitat from April 1st – August 31st to minimize impacts during prairie falcon nesting.
- If it is anticipated that construction or drilling will occur during the given timing restriction, a BLM or qualified biologist shall be notified so surveys can be conducted. Depending upon the results of the surveys, permission to proceed may or may not be recommended or granted by the BLM Authorized Officer.
- The reclamation seed mix will incorporate low growing grasses and forbs; and not crested wheatgrass since this negatively impacts mountain plover habitat.
- Hospital mufflers will be installed on new and existing pump jacks at the host well locations.
- Screening will be placed on stacks and on other openings of heater-treaters or fired vessels to prevent entry by migratory birds.

Air Quality

- All internal combustion equipment shall be kept in good working order.
- Water or other approved dust suppressants shall be used at construction sites and along roads, as determined appropriate by the Authorized Officer.
- Open burning of garbage or refuse shall not occur at well sites or other facilities.
- Drill rigs shall be equipped with Tier II or better diesel engines.
- Vent emissions from stock tanks and natural gas TEG dehydrators shall be controlled by routing the emissions to a flare or similar control device which will reduce emissions by 95% or greater.
- Low bleed pneumatics shall be installed on separator dump valves and other controllers. The use of low bleed pneumatics will result in a lower emission of VOCs.
- During completion, flaring shall be limited as much as possible. Production equipment and gathering lines shall be installed as soon as possible.
- Well site telemetry shall be utilized as feasible for production operations.

Reclamation

- Reclamation will be completed in accordance with the Newfield Exploration Company Castle Peak and Eight Mile Flat Reclamation Plan on file with the Vernal Field Office of the BLM.
- Appropriate erosion control and revegetation measures will be employed. In areas with unstable soils where seeding alone may not adequately control erosion, grading will be used to minimize slopes and water bars will be installed on disturbed slopes. Erosion control efforts will be monitored by Newfield and, if necessary, modifications will be made to control erosion.

Seed Mix (Interim and Final Reclamation)

Common Name	Latin Name	Pure Live Seed (lbs/acre)	Seed Planting Depth
Squirreltail grass	<i>Elymus elymoides</i>	2.0	¼ - ½"
Needle and thread grass	<i>Hesperostipa comata</i>	2.0	½"
Siberian Wheatgrass	<i>Agropyron fragile</i>	2.0	½"
Shadscale saltbush	<i>Atriplex confertifolia</i>	2.0	½"
Four-wing saltbush	<i>Atriplex canescens</i>	2.0	½"
Gardner's saltbush	<i>Atriplex gardneri</i>	2.0	½"
Blue flax (Lewis flax)	<i>Linum lewisii</i>	1.0	⅛ - ¼"

- All pounds are pure live seed.
- All seed and mulch will be certified weed free.
- Rates are set for drill seeding; double rate if broadcasting.

Monitoring and Reporting

- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) that designates the proposed site-specific monitoring and reference sites chosen for the location. A description of the proposed sites shall be included, as well as a map showing the locations of the proposed sites.
- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) 3 growing seasons after reclamation efforts have occurred evaluating the status of the reclaimed areas in order to determine whether the BLM standards set forth in the Green River District Reclamation Guidelines have been met (30% or greater basal cover).

**DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

SITE SPECIFIC DOWNHOLE COAs:

- Newfield Production Co. shall comply with all applicable requirements in the SOP (version: "Greater Monument Butte Green River Development Program", June 24, 2008). The operator shall also comply with applicable laws and regulations; with lease terms, Onshore Oil and Gas Orders, NTL's; and with other orders and instructions of the authorized officer.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB

or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- For information regarding production reporting, contact the Office of Natural Resources Revenue (ONRR) at www.ONRR.gov.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs,

core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Green River District-Vernal Field Office

170 South 500 East

Vernal, UT 84078

(435) 781-4400 Fax: (435) 781-4410

<http://www.blm.gov/ut/st/en/fo/vernal.html>



IN REPLY REFER TO:
3160 (UTG011)

Mandie Crozier
Newfield Production Company
Route 3, Box 3630
Myton, UT 84052

Re: Well No. GMBU D-17-9-16
SWSW Sec. 8, T9S, R16E
Duchesne County, Utah
Lease No. UTU-74390
Greater Monument Butte Unit (GMBU)

Dear Ms. Crozier:

Enclosed are two (2) approved copies of the Application for Permit to Drill (APD) with attached Conditions of Approval for the above referenced well.

If you have any questions regarding APD processing, please contact Tyler Larsen at (435) 781-4488.

Sincerely,

/s/ Jerry Kenczka

Jerry Kenczka
Assistant Field Manager
Lands & Mineral Resources

Enclosures

bcc: Well File
Reading File



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Green River District-Vernal Field Office

170 South 500 East

Vernal, UT 84078

(435) 781-4400 Fax: (435) 781-4410

<http://www.blm.gov/ut/st/en/fo/vernal.html>



IN REPLY REFER TO:
3160 (UTG011)

Mandie Crozier
Newfield Production Company
Route 3, Box 3630
Myton, UT 84052

Re: Well No. GMBU D-17-9-16
SWSW Sec. 8, T9S, R16E
Duchesne County, Utah
Lease No. UTU-74390
Greater Monument Butte Unit (GMBU)

Dear Ms. Crozier:

Enclosed are two (2) approved copies of the Application for Permit to Drill (APD) with attached Conditions of Approval for the above referenced well.

If you have any questions regarding APD processing, please contact Tyler Larsen at (435) 781-4488.

Sincerely,

/s/ Jerry Kenczka

Jerry Kenczka
Assistant Field Manager
Lands & Mineral Resources

Enclosures

bcc: Well File
Reading File



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Green River District-Vernal Field Office

170 South 500 East

Vernal, UT 84078

(435) 781-4400 Fax: (435) 781-4410

<http://www.blm.gov/ut/st/en/fo/vernal.html>



IN REPLY REFER TO:
3160 (UTG011)

Mandie Crozier
Newfield Production Company
Route 3, Box 3630
Myton, UT 84052

Re: Well No. GMBU D-17-9-16
SWSW Sec. 8, T9S, R16E
Duchesne County, Utah
Lease No. UTU-74390
Greater Monument Butte Unit (GMBU)

Dear Ms. Crozier:

Enclosed are two (2) approved copies of the Application for Permit to Drill (APD) with attached Conditions of Approval for the above referenced well.

If you have any questions regarding APD processing, please contact Tyler Larsen at (435) 781-4488.

Sincerely,

Jerry Kenczka
Assistant Field Manager
Lands & Mineral Resources

Enclosures

BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# Ross 31 Submitted By
Branden Arnold Phone Number 435-401-0223
Well Name/Number GMBU D-17-9-16
Qtr/Qtr SW/SW Section 8 Township 9S Range 16E
Lease Serial Number UTU-74390
API Number 43-013-50701

Spud Notice – Spud is the initial spudding of the well, not drilling
out below a casing string.

Date/Time 11/17/11 9:00 AM ☒ PM ☐

Casing – Please report time casing run starts, not cementing
times.

- ☒ Surface Casing
- ☐ Intermediate Casing
- ☐ Production Casing
- ☐ Liner
- ☐ Other

Date/Time 11/17/11 3:00 AM ☐ PM ☒

BOPE

- ☐ Initial BOPE test at surface casing point
- ☐ BOPE test at intermediate casing point
- ☐ 30 day BOPE test
- ☐ Other

Date/Time _____ AM ☐ PM ☐

Remarks _____

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SUBMIT IN TRIPLICATE - Other Instructions on page 2

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

NEWFIELD PRODUCTION COMPANY

3a. Address

Route 3 Box 3630
Myton, UT 84052

3b. Phone (include area code)

435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Section 3 T9S R16E

5. Lease Serial No.

USA UTU-74390

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or

GMBU

8. Well Name and No.

GMBU D-17-9-16

9. API Well No.

4301350701

10. Field and Pool, or Exploratory Area

GREATER MB UNIT

11. County or Parish, State

DUCHESNE, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Spud Notice
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 11/17/11 MIRU Ross #31. Spud well @9:00 AM. Drill 330' of 12 1/4" hole with air mist. TIH W/ 7 Jt's 8 5/8" J-55 24# csqn. Set @ 330.92. On 11/21/11 cement with 160 sks of class "G" w/ 2% CaCL2 + 0.25#/sk Cello- Flake Mixed @ 15.8ppg w/ 1.17ft3/sk yield. Returned 1 barrels cement to pit. WOC.

I hereby certify that the foregoing is true and correct (Printed/ Typed)

Branden Arnold

Signature



Title

Date

11/22/2011

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on page 2)

RECEIVED
NOV 22 2011
DIV. OF OIL, GAS & MINING

NEWFIELD PRODUCTION COMPANY - CASING & CEMENT REPORT

8 5/8" CASING SET AT 330.92

LAST CASING 14 SET AT 10
 DATUM 13
 DATUM TO CUT OFF CASING 13
 DATUM TO BRADENHEAD FLANGE 13
 TD DRILLER 330 LOGGER _____
 HOLE SIZE 12 1/4"

OPERATOR Newfield Exploration Company
 WELL GMBU D-17-9-16
 FIELD/PROSPECT Monument Butte
 CONTRACTOR & RIG # Ross # 31

LOG OF CASING STRING:

PIECES	OD	ITEM - MAKE - DESCRIPTION		WT / FT	GRD	THREAD	CONDT	LENGTH
1		wellhead					A	1.42
7	8 5/8"	casing (shoe jt 46.20)		24	J-55	STC	A	317.6
1	8 5/8"	guide shoe					A	0.9
CASING INVENTORY BAL.		FEET	JTS	TOTAL LENGTH OF STRING				319.92
TOTAL LENGTH OF STRING		319.92	7	LESS CUT OFF PIECE				2
LESS NON CSG. ITEMS		2.32		PLUS DATUM TO T/CUT OFF CSG				13
PLUS FULL JTS. LEFT OUT		0		CASING SET DEPTH				330.92
TOTAL		317.6	7	} COMPARE				
TOTAL CSG. DEL. (W/O THRDS)								
TIMING								
BEGIN RUN CSG.	Spud	1:00 AM	11/17/2011	GOOD CIRC THRU JOB <u>Yes</u>				
CSG. IN HOLE		9:00 AM	11/18/2011	Bbls CMT CIRC TO SURFACE <u>1</u>				
BEGIN CIRC		1:59 PM	11/21/2011	RECIPROCATED PIPI <u>No</u>				
BEGIN PUMP CMT		2:09 PM	11/21/2011	BUMPED PLUG TO <u>452</u>				
BEGIN DSPL. CMT		2:18 PM	11/21/2011					
PLUG DOWN		2:25 PM	11/21/2011					

[illegible]

COMPANY REPRESENTATIVE

Branden Arnold

DATE 11/21/2011

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING
ENTITY ACTION FORM -FORM 6

OPERATOR: **NEWFIELD PRODUCTION COMPANY**
ADDRESS: **RT. 3 BOX 3630**
MYTON, UT 84052

OPERATOR ACCT. NO. **N2895**

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE	
					QQ	SC	TP	RG	COUNTY			
B	99999	17400	4301350699	GMBU U-7-9-16	NWNW	17	7	9S	16E	DUCHESNE	11/21/2011	11/30/11
WELL 1 COMMENTS: <i>GRRV</i> <i>BHL = Sec 7 SESE</i>												
B	99999	17400	4301350700	GMBU V-7-9-16	NWNE	18	7	9S	16E	DUCHESNE		11/30/11
<i>GRRV</i> <i>BHL = Sec 7 SESE</i>												
B	99999	17400	4301350701	GMBU D-17-9-16	SWSW	08	11	9S	16E	DUCHESNE		11/30/11
<i>GRRV</i> <i>BHL = Sec 17 NENW</i>												
B	99999	17400	4301350682	GMBU L-11-9-16	NWSE	11		9S	16E	DUCHESNE		11/30/11
<i>GRRV</i> <i>BHL = SENE</i>												
B	99999	17400	4301350698	GMBU W-7-9-16	NENW	18	7	9S	16E	DUCHESNE		11/30/11
<i>GRRV</i> <i>BHL = Sec 7 SWSE</i>												
B	99999	17400	4301350579	GMBU R-11-9-16	SESW	11		9S	16E	DUCHESNE		11/30/11
<i>GRRV</i> <i>BHL = NWSE</i>												

ACTION CODES (See instructions on back of form)

- A - 1 new entity for new well (single well only)
- B - 1 well to existing entity (group or unit well)
- C - from one existing entity to another existing entity
- D - well from one existing entity to a new entity
- E - other (explain in comments section)

RECEIVED

NOV 23 2011

DIV. OF OIL, GAS & MINING

Signature

Production Clerk


Jentri Park

11/23/11

NOTE: Use COMMENT section to explain why each Action Code was selected.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-74390
1. TYPE OF WELL Oil Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052		8. WELL NAME and NUMBER: GMBU D-17-9-16
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0578 FSL 0791 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSW Section: 08 Township: 09.0S Range: 16.0E Meridian: S		9. API NUMBER: 43013507010000
PHONE NUMBER: 435 646-4825 Ext		9. FIELD and POOL or WILDCAT: MONUMENT BUTTE
COUNTY: DUCHESNE		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 12/8/2011 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </div> <div style="width: 33%;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input checked="" type="checkbox"/> OTHER </div> <div style="width: 33%;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION </div> </div>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. In putting together the directional plan it was brought to our attention that there was a slight error on the plats that were submitted with the original ADP for the GMBU D-17-9-16. In order to hit both the C.O.P. and BHL targets on the original plats, we would have had to change trajectory at the C.O.P. Since we normally maintain a constant azimuth and inclination when drilling the 20-acre wells, the original plats have been revised to reflect the corrected proposed bottom hole footage. The newly proposed BH footage is 174' FND and 1598' FWL. Everything else in the APD will remain the same.		
Approved by the Utah Division of Oil, Gas and Mining Date: 12/14/2011 By:		
NAME (PLEASE PRINT) Mandie Crozier		PHONE NUMBER 435 646-4825
SIGNATURE N/A		TITLE Regulatory Tech
DATE 12/8/2011		

T9S, R16E, S.L.B.&M.

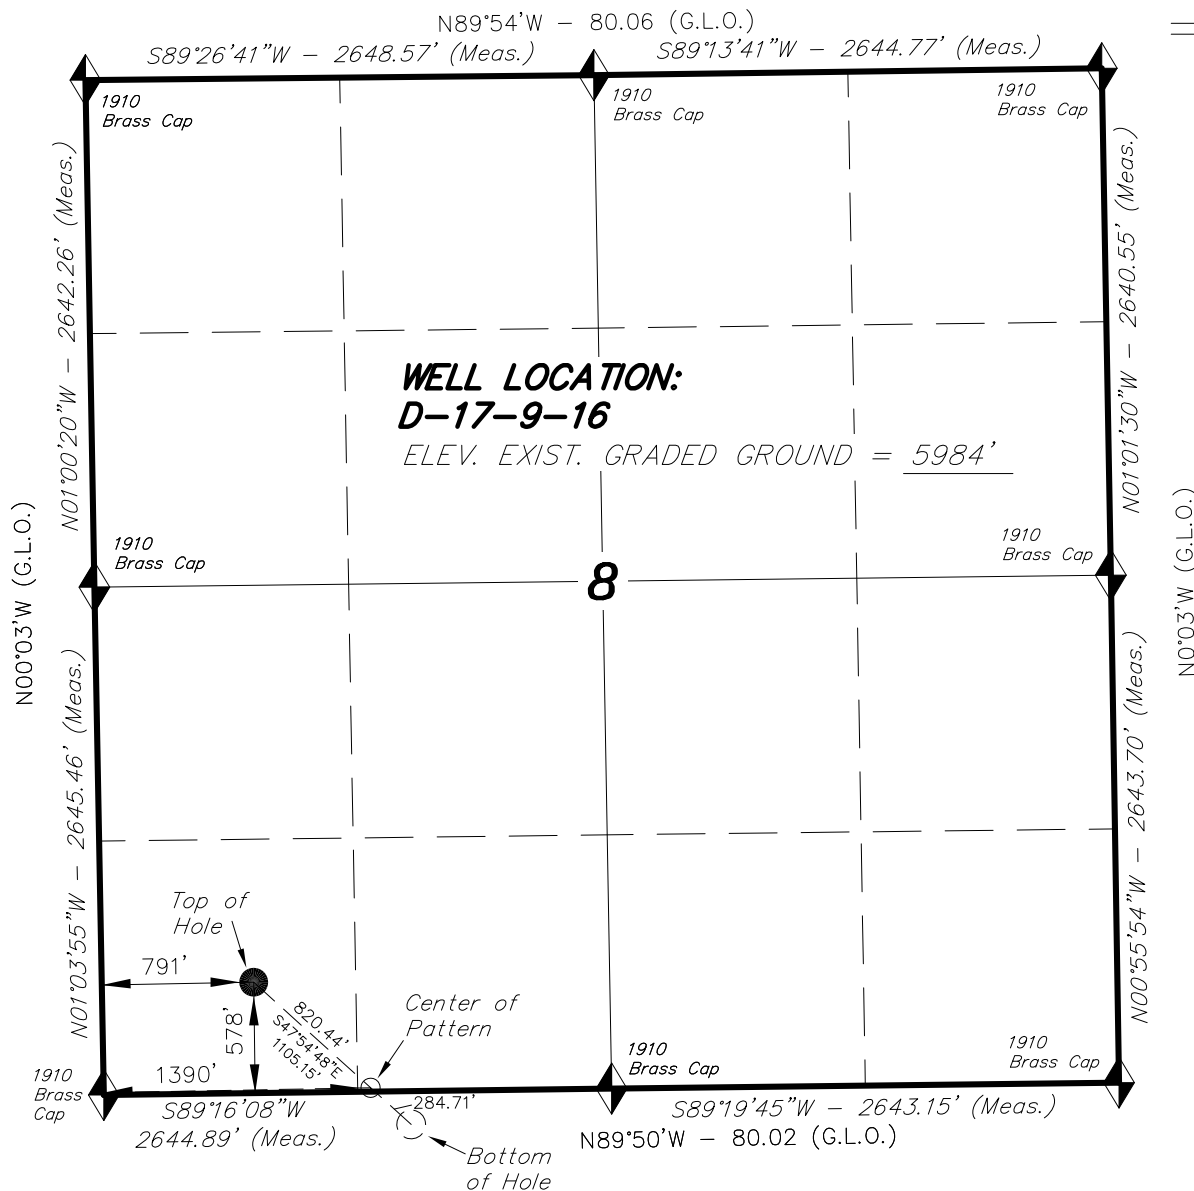


BASIS OF ELEV; Elevations are base on
 LOCATION: an N.G.S. OPUS Correction.
 LAT. 40°04'09.56" LONG. 110°00'43.28"
 (Tristate Aluminum Cap) Elev. 5281.57'

D-17-9-16
(Surface Location) NAD 83
 LATITUDE = 40° 02' 23.10"
 LONGITUDE = 110° 08' 59.33"

NEWFIELD EXPLORATION COMPANY

WELL LOCATION, D-17-9-16, LOCATED
 AS SHOWN IN THE SW 1/4 SW 1/4 OF
 SECTION 8, T9S, R16E, S.L.B.&M.
 DUCHESNE COUNTY, UTAH.

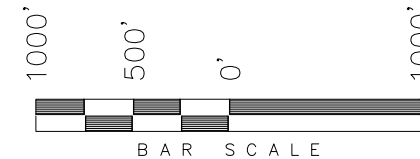


NOTES:

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.
3. The Center of Pattern footages are 20' FSL & 1390' FWL.



= SECTION CORNERS LOCATED

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS
 PREPARED FROM FIELD BOOKS OF ACTUAL SURVEYS
 MADE BY ME OR UNDER MY SUPERVISION AND THAT
 THE SAME ARE TRUE AND CORRECT TO THE BEST
 OF MY KNOWLEDGE AND BELIEF.

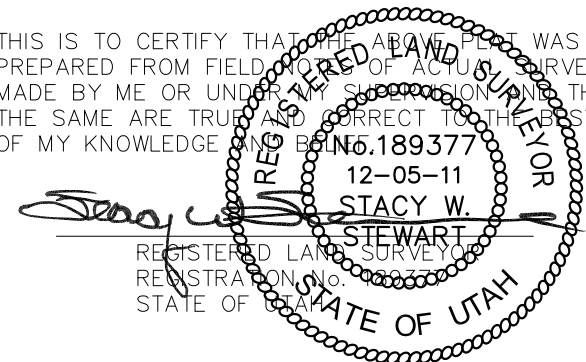


TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
 (435) 781-2501

DATE SURVEYED: 11-02-10	SURVEYED BY: T.P.
DATE DRAWN: 01-19-11	DRAWN BY: M.W.
REVISED: 12-05-11 F.T.M.	SCALE: 1" = 1000'

RECEIVED Dec 08 2011

T9S, R16E, S.L.B.&M.

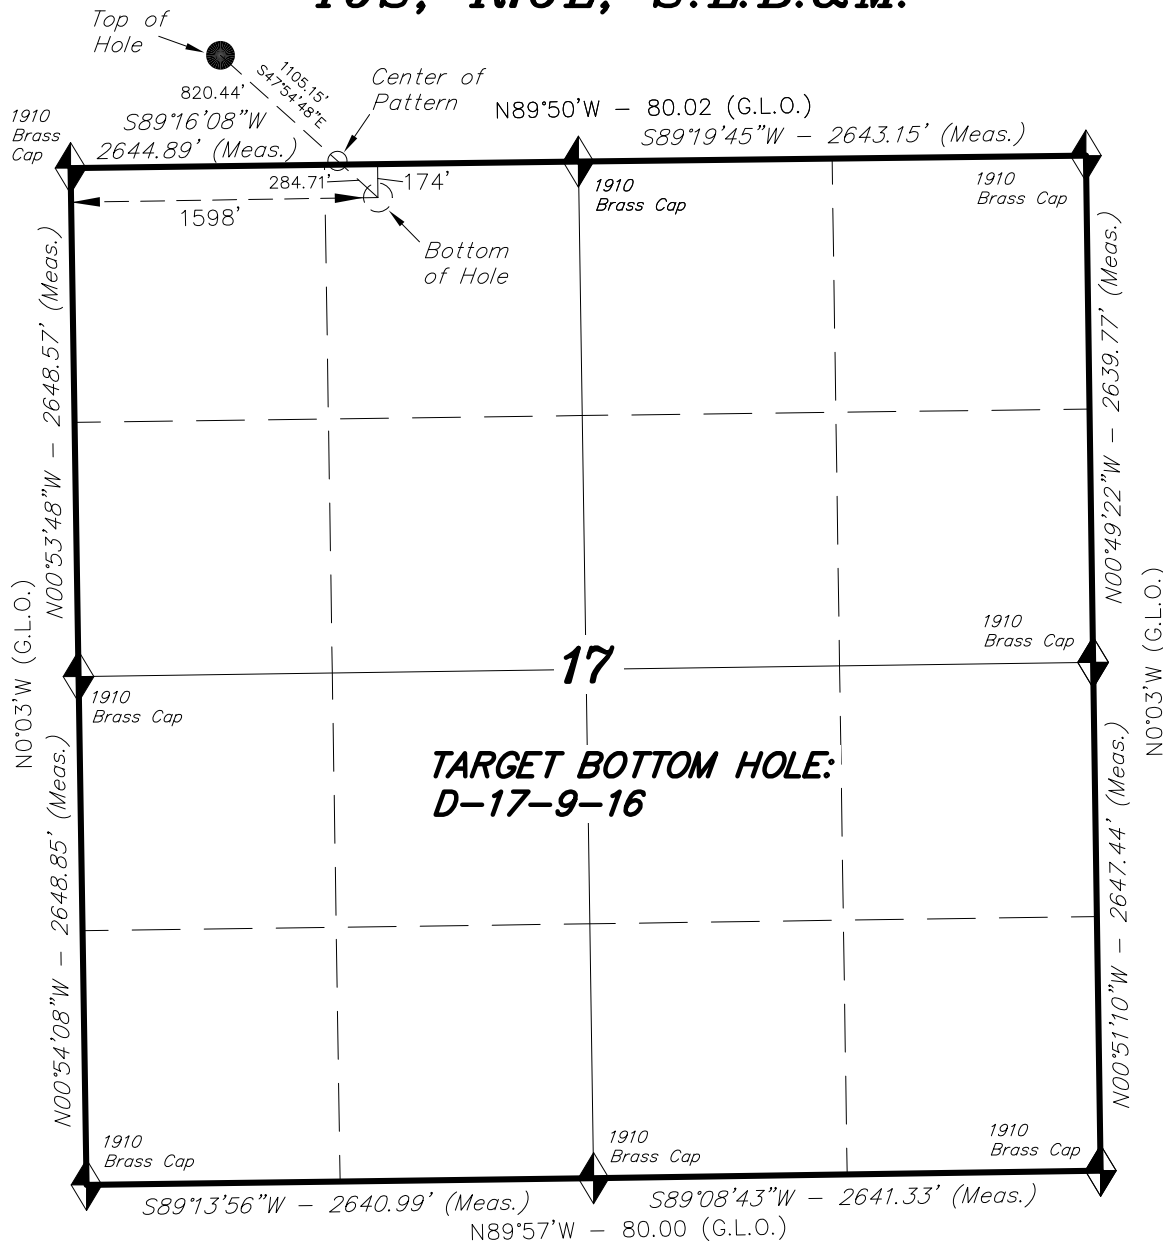


BASIS OF ELEV; Elevations are base on
LOCATION: an N.G.S. OPUS Correction.
LAT. 40°04'09.56" LONG. 110°00'43.28"
(Tristate Aluminum Cap) Elev. 5281.57'



= SECTION CORNERS LOCATED

NEWFIELD EXPLORATION COMPANY

TARGET BOTTOM HOLE, D-17-9-16,
LOCATED AS SHOWN IN THE NE 1/4
NW 1/4 OF SECTION 17, T9S, R16E,
S.L.B.&M. DUCHESNE COUNTY, UTAH.

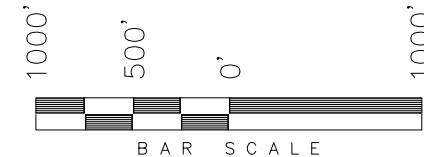


NOTES:

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.
3. The Bottom of Hole footages are 174' FNL & 1598' FWL.



THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS
PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS
MADE BY ME OR UNDER MY SUPERVISION AND THAT
THE SAME ARE TRUE AND CORRECT TO THE BEST
OF MY KNOWLEDGE AND BELIEF.

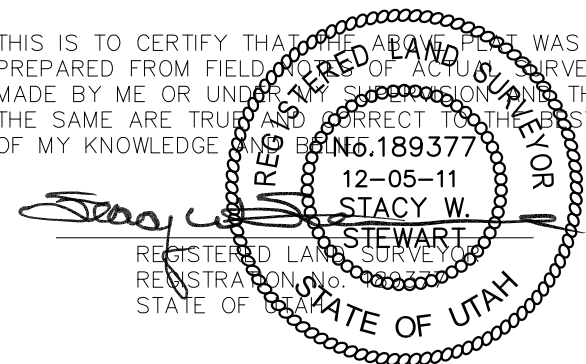


TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501

DATE SURVEYED: 11-02-10	SURVEYED BY: T.P.
DATE DRAWN: 01-19-11	DRAWN BY: M.W.
REVISED: 12-05-11 F.T.M.	SCALE: 1" = 1000'

RECEIVED Dec. 08, 2011

NEWFIELD EXPLORATION COMPANY**WELL PAD INTERFERENCE PLAT****D-17-9-16 (Proposed Well)****13-8-9-16 (Existing Well)***Pad Location: SWSW Section 8, T9S, R16E, S.L.B.&M.***TOP HOLE FOOTAGES**


D-17-9-16 (PROPOSED)
 578' FSL & 791' FWL

CENTER OF PATTERN FOOTAGES

D-17-9-16 (PROPOSED)
 20' FSL & 1390' FWL

BOTTOM HOLE FOOTAGES

D-17-9-16 (PROPOSED)
 174' FNL & 1598' FWL

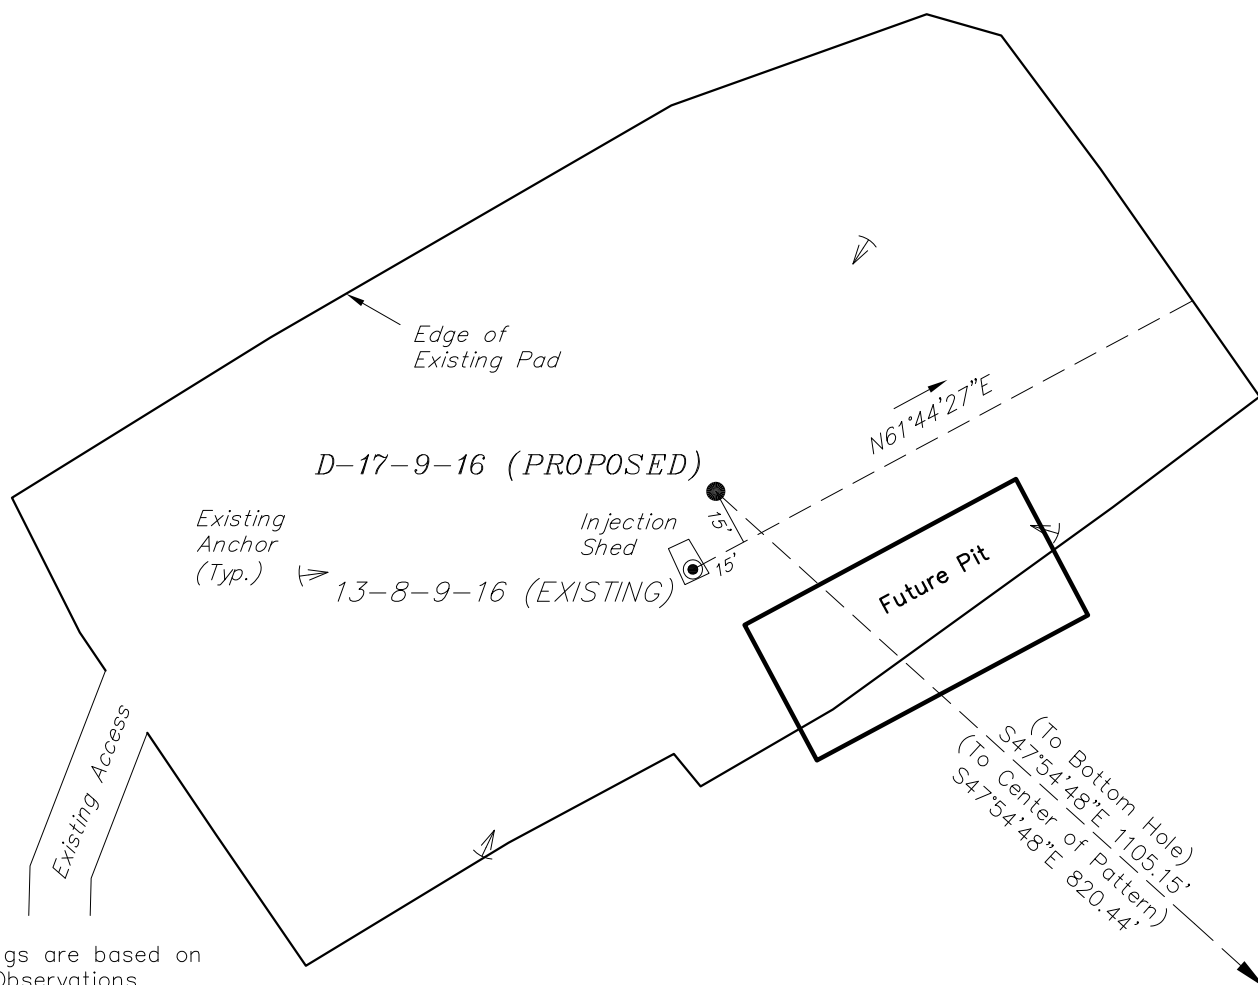**Note:**

Bearings are based on
 GPS Observations.

RELATIVE COORDINATES
From Top Hole to C.O.P.

WELL	NORTH	EAST
D-17-9-16	-550'	609'

RELATIVE COORDINATES
From Top Hole to Bottom Hole

WELL	NORTH	EAST
D-17-9-16	-741'	820'

LATITUDE & LONGITUDE
Surface position of Wells (NAD 83)

WELL	LATITUDE	LONGITUDE
D-17-9-16	40° 02' 23.10"	110° 08' 59.33"
13-8-9-16	40° 02' 22.90"	110° 08' 59.41"

SURVEYED BY: T.P.	DATE SURVEYED: 11-02-10
DRAWN BY: M.W.	DATE DRAWN: 01-19-11
SCALE: 1" = 50'	REVISED: F.T.M. 12-05-11

Tri State
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

(435) 781-2501

RECEIVED Dec. 08, 2011


NEWFIELD EXPLORATION COMPANY

LOCATION LAYOUT

D-17-9-16 (Proposed Well)

13-8-9-16 (Existing Well)





Pad Location: SWSW Section 8, T9S, R16E, S.L.B.&M.

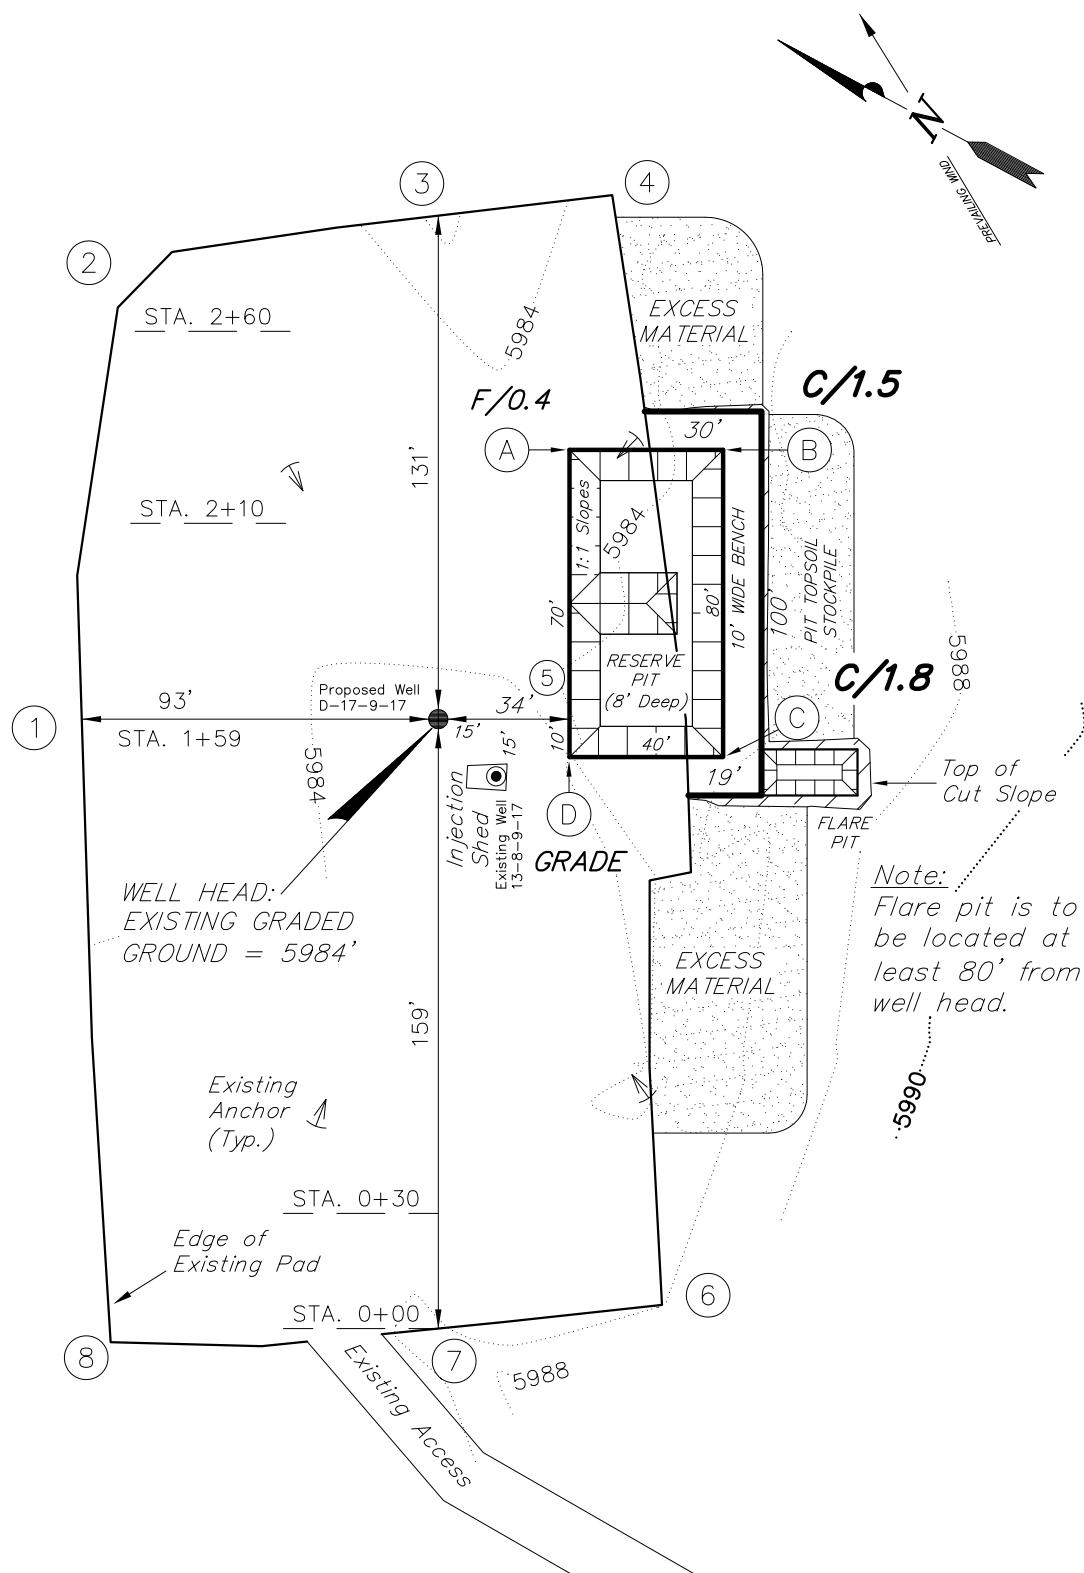

SURVEYED BY: T.P.	DATE SURVEYED: 11-02-10
DRAWN BY: M.W.	DATE DRAWN: 01-19-11
SCALE: 1" = 50'	REVISED: F.T.M. 12-05-11

Tri State (435) 781-2501
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

RECEIVED Dec. 08, 2011

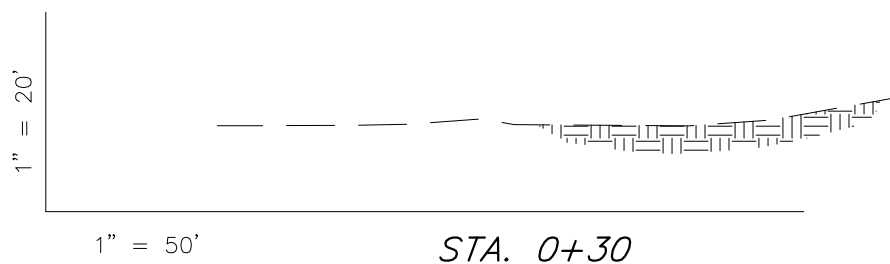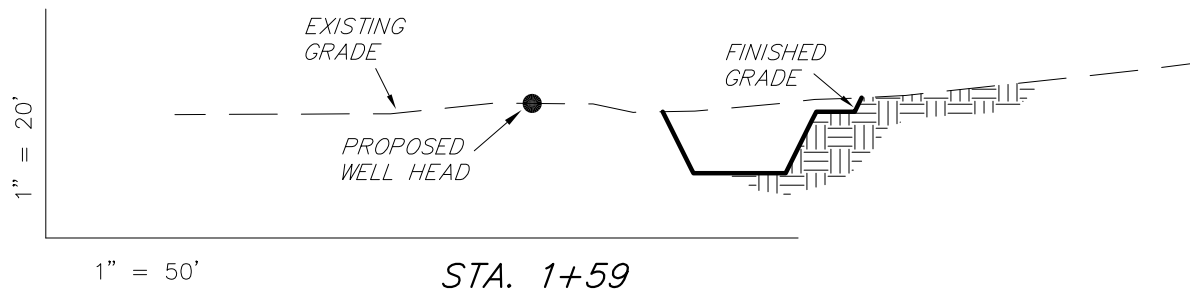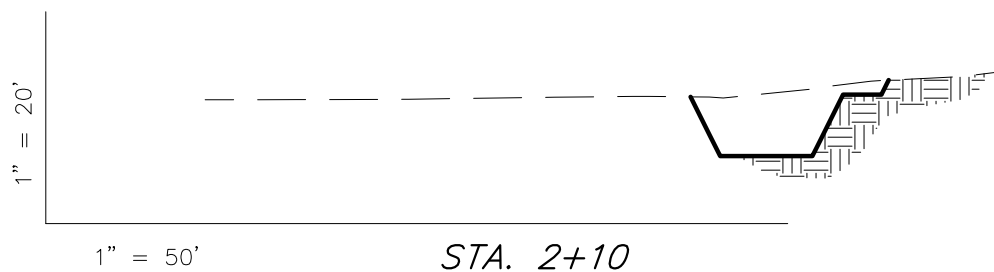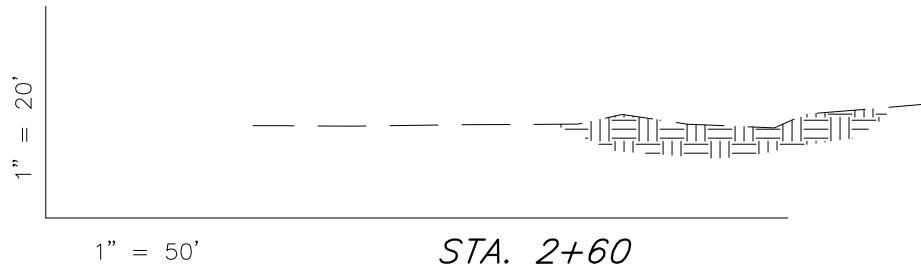NEWFIELD EXPLORATION COMPANY**CROSS SECTIONS****D-17-9-16 (Proposed Well)****13-8-9-16 (Existing Well)***Pad Location: SWSW Section 8, T9S, R16E, S.L.B.&M.*

NOTE:
UNLESS OTHERWISE NOTED
CUT SLOPES ARE AT 1:1
FILL SLOPES ARE AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES
(No Shrink or swell adjustments have been used)
(Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	40	10	Topsoil is not included in Pad Cut	30
PIT	640	0		640
TOTALS	680	10	130	670

SURVEYED BY: T.P.	DATE SURVEYED: 11-02-10
DRAWN BY: M.W.	DATE DRAWN: 01-19-11
SCALE: 1" = 50'	REVISED: F.T.M. 12-05-11

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078
(435) 781-2501

RECEIVED Dec. 08, 2011


NEWFIELD EXPLORATION COMPANY

TYPICAL RIG LAYOUT

D-17-9-16 (Proposed Well)

13-8-9-16 (Existing Well)

Pad Location: SWSW Section 8, T9S, R16E, S.L.B.&M.

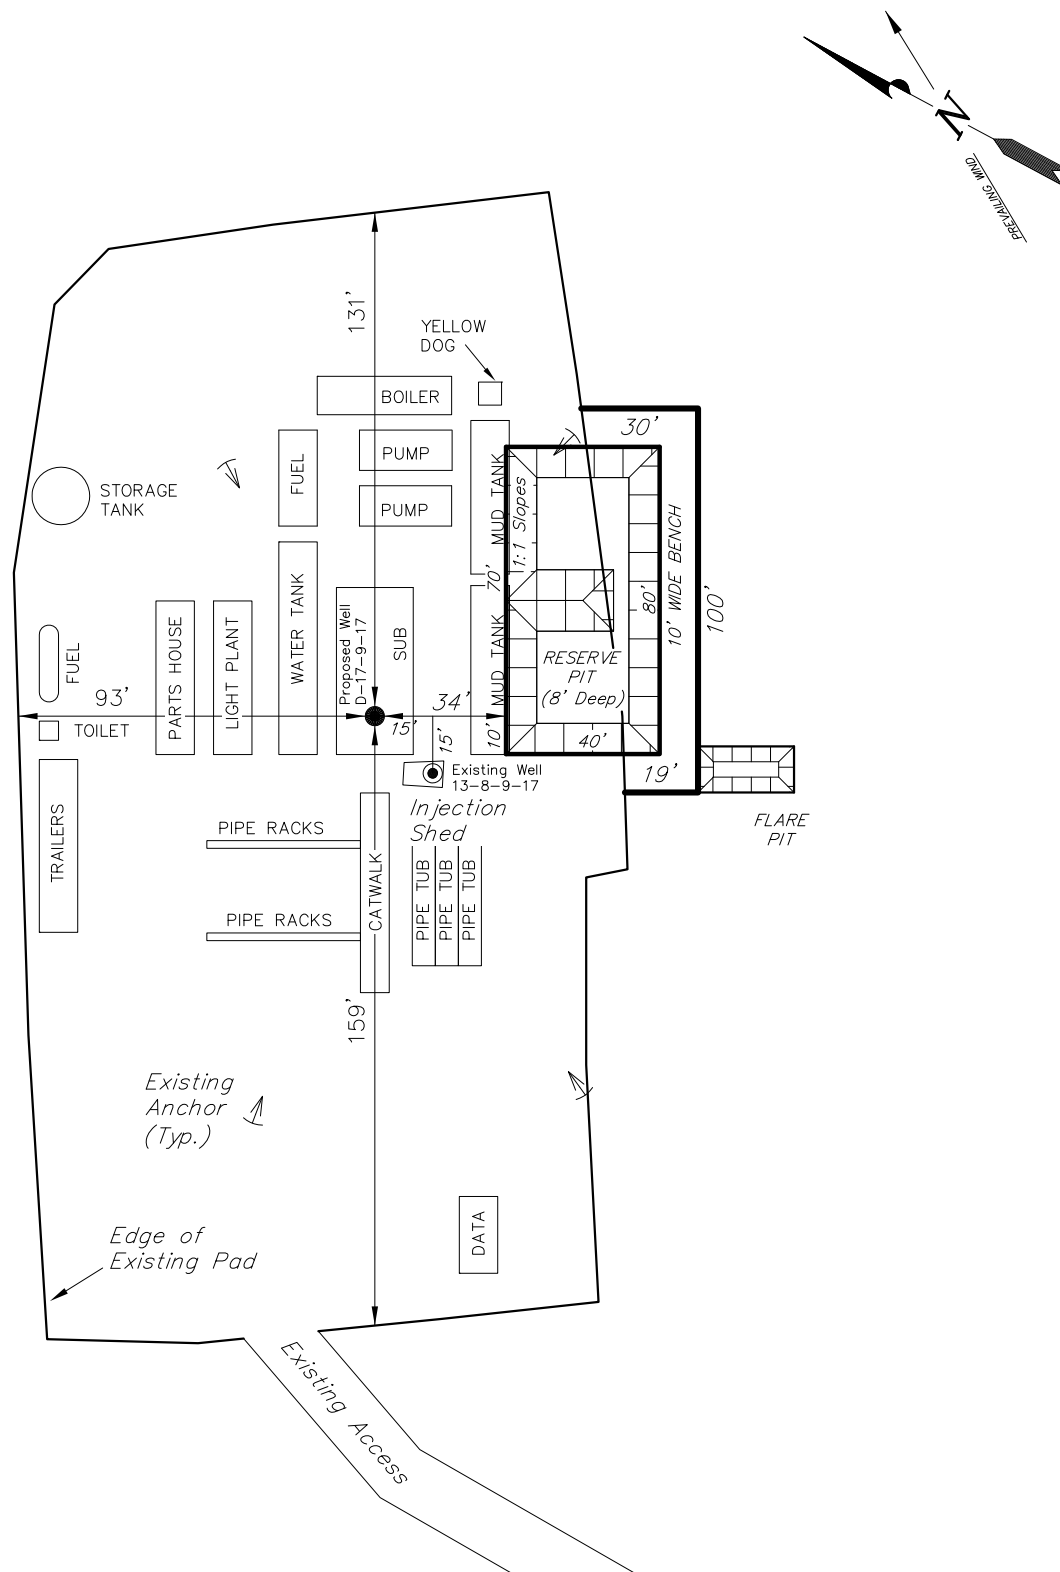

SURVEYED BY: T.P.	DATE SURVEYED: 11-02-10
DRAWN BY: M.W.	DATE DRAWN: 01-19-11
SCALE: 1" = 50'	REVISED: F.T.M. 12-05-11

Tri State (435) 781-2501
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

RECEIVED Dec. 08, 2011



NEWFIELD EXPLORATION

**USGS Myton SW (UT)
SECTION 8 T9S, R16E
D-17-9-16**

Wellbore #1

Plan: Design #1

Standard Planning Report

28 November, 2011





Payzone Directional Planning Report



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well D-17-9-16
Company:	NEWFIELD EXPLORATION	TVD Reference:	D-17-9-16 @ 5996.0ft (Capstar 329)
Project:	USGS Myton SW (UT)	MD Reference:	D-17-9-16 @ 5996.0ft (Capstar 329)
Site:	SECTION 8 T9S, R16E	North Reference:	True
Well:	D-17-9-16	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		

Site	SECTION 8 T9S, R16E, SEC 8 T9S, R16E				
Site Position:		Northing:	7,188,200.00 ft	Latitude:	40° 2' 44.068 N
From:	Lat/Long	Easting:	2,019,900.00 ft	Longitude:	110° 8' 39.874 W
Position Uncertainty:	0.0 ft	Slot Radius:	"	Grid Convergence:	0.87 °

Well	D-17-9-16, SHL LAT: 40 02 23.10 LONG: -110 08 59.33					
Well Position	+N/-S	-2,121.6 ft	Northing:	7,186,055.78 ft	Latitude:	40° 2' 23.100 N
	+E/-W	-1,513.0 ft	Easting:	2,018,419.24 ft	Longitude:	110° 8' 59.330 W
Position Uncertainty		0.0 ft	Wellhead Elevation:	5,996.0 ft	Ground Level:	5,984.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	12/29/2010	11.41	65.79	52,297

Design	Design #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.0	0.0	0.0	132.09

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,402.5	12.04	132.09	1,396.7	-56.3	62.3	1.50	1.50	0.00	132.09	
4,933.5	12.04	132.09	4,850.0	-549.9	608.8	0.00	0.00	0.00	0.00	D-17-9-16 TGT
6,298.6	12.04	132.09	6,185.0	-740.8	820.1	0.00	0.00	0.00	0.00	



Payzone Directional Planning Report



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well D-17-9-16
Company:	NEWFIELD EXPLORATION	TVD Reference:	D-17-9-16 @ 5996.0ft (Capstar 329)
Project:	USGS Myton SW (UT)	MD Reference:	D-17-9-16 @ 5996.0ft (Capstar 329)
Site:	SECTION 8 T9S, R16E	North Reference:	True
Well:	D-17-9-16	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
Start Build 1.50									
700.0	1.50	132.09	700.0	-0.9	1.0	1.3	1.50	1.50	0.00
800.0	3.00	132.09	799.9	-3.5	3.9	5.2	1.50	1.50	0.00
900.0	4.50	132.09	899.7	-7.9	8.7	11.8	1.50	1.50	0.00
1,000.0	6.00	132.09	999.3	-14.0	15.5	20.9	1.50	1.50	0.00
1,100.0	7.50	132.09	1,098.6	-21.9	24.3	32.7	1.50	1.50	0.00
1,200.0	9.00	132.09	1,197.5	-31.5	34.9	47.0	1.50	1.50	0.00
1,300.0	10.50	132.09	1,296.1	-42.9	47.5	64.0	1.50	1.50	0.00
1,402.5	12.04	132.09	1,396.7	-56.3	62.3	84.0	1.50	1.50	0.00
Start 3531.0 hold at 1402.5 MD									
1,500.0	12.04	132.09	1,492.0	-69.9	77.4	104.3	0.00	0.00	0.00
1,600.0	12.04	132.09	1,589.8	-83.9	92.9	125.2	0.00	0.00	0.00
1,700.0	12.04	132.09	1,687.6	-97.9	108.4	146.0	0.00	0.00	0.00
1,800.0	12.04	132.09	1,785.4	-111.9	123.9	166.9	0.00	0.00	0.00
1,900.0	12.04	132.09	1,883.2	-125.8	139.3	187.8	0.00	0.00	0.00
2,000.0	12.04	132.09	1,981.0	-139.8	154.8	208.6	0.00	0.00	0.00
2,100.0	12.04	132.09	2,078.8	-153.8	170.3	229.5	0.00	0.00	0.00
2,200.0	12.04	132.09	2,176.6	-167.8	185.8	250.3	0.00	0.00	0.00
2,300.0	12.04	132.09	2,274.4	-181.8	201.2	271.2	0.00	0.00	0.00
2,400.0	12.04	132.09	2,372.2	-195.7	216.7	292.0	0.00	0.00	0.00
2,500.0	12.04	132.09	2,470.0	-209.7	232.2	312.9	0.00	0.00	0.00
2,600.0	12.04	132.09	2,567.8	-223.7	247.7	333.7	0.00	0.00	0.00
2,700.0	12.04	132.09	2,665.6	-237.7	263.1	354.6	0.00	0.00	0.00
2,800.0	12.04	132.09	2,763.4	-251.7	278.6	375.5	0.00	0.00	0.00
2,900.0	12.04	132.09	2,861.2	-265.6	294.1	396.3	0.00	0.00	0.00
3,000.0	12.04	132.09	2,959.0	-279.6	309.6	417.2	0.00	0.00	0.00
3,100.0	12.04	132.09	3,056.8	-293.6	325.1	438.0	0.00	0.00	0.00
3,200.0	12.04	132.09	3,154.6	-307.6	340.5	458.9	0.00	0.00	0.00
3,300.0	12.04	132.09	3,252.4	-321.6	356.0	479.7	0.00	0.00	0.00
3,400.0	12.04	132.09	3,350.2	-335.5	371.5	500.6	0.00	0.00	0.00
3,500.0	12.04	132.09	3,448.0	-349.5	387.0	521.5	0.00	0.00	0.00
3,600.0	12.04	132.09	3,545.8	-363.5	402.4	542.3	0.00	0.00	0.00
3,700.0	12.04	132.09	3,643.6	-377.5	417.9	563.2	0.00	0.00	0.00
3,800.0	12.04	132.09	3,741.4	-391.5	433.4	584.0	0.00	0.00	0.00
3,900.0	12.04	132.09	3,839.2	-405.4	448.9	604.9	0.00	0.00	0.00
4,000.0	12.04	132.09	3,937.0	-419.4	464.4	625.7	0.00	0.00	0.00
4,100.0	12.04	132.09	4,034.8	-433.4	479.8	646.6	0.00	0.00	0.00
4,200.0	12.04	132.09	4,132.6	-447.4	495.3	667.4	0.00	0.00	0.00
4,300.0	12.04	132.09	4,230.4	-461.4	510.8	688.3	0.00	0.00	0.00
4,400.0	12.04	132.09	4,328.2	-475.3	526.3	709.2	0.00	0.00	0.00
4,500.0	12.04	132.09	4,426.0	-489.3	541.7	730.0	0.00	0.00	0.00
4,600.0	12.04	132.09	4,523.8	-503.3	557.2	750.9	0.00	0.00	0.00
4,700.0	12.04	132.09	4,621.6	-517.3	572.7	771.7	0.00	0.00	0.00
4,800.0	12.04	132.09	4,719.4	-531.3	588.2	792.6	0.00	0.00	0.00
4,900.0	12.04	132.09	4,817.2	-545.2	603.6	813.4	0.00	0.00	0.00
4,933.5	12.04	132.09	4,850.0	-549.9	608.8	820.4	0.00	0.00	0.00



Payzone Directional Planning Report



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well D-17-9-16
Company:	NEWFIELD EXPLORATION	TVD Reference:	D-17-9-16 @ 5996.0ft (Capstar 329)
Project:	USGS Myton SW (UT)	MD Reference:	D-17-9-16 @ 5996.0ft (Capstar 329)
Site:	SECTION 8 T9S, R16E	North Reference:	True
Well:	D-17-9-16	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
D-17-9-16 TGT									
5,000.0	12.04	132.09	4,915.0	-559.2	619.1	834.3	0.00	0.00	0.00
5,100.0	12.04	132.09	5,012.8	-573.2	634.6	855.2	0.00	0.00	0.00
5,200.0	12.04	132.09	5,110.6	-587.2	650.1	876.0	0.00	0.00	0.00
5,300.0	12.04	132.09	5,208.4	-601.2	665.6	896.9	0.00	0.00	0.00
5,400.0	12.04	132.09	5,306.2	-615.1	681.0	917.7	0.00	0.00	0.00
5,500.0	12.04	132.09	5,404.0	-629.1	696.5	938.6	0.00	0.00	0.00
5,600.0	12.04	132.09	5,501.8	-643.1	712.0	959.4	0.00	0.00	0.00
5,700.0	12.04	132.09	5,599.6	-657.1	727.5	980.3	0.00	0.00	0.00
5,800.0	12.04	132.09	5,697.4	-671.1	742.9	1,001.1	0.00	0.00	0.00
5,900.0	12.04	132.09	5,795.2	-685.0	758.4	1,022.0	0.00	0.00	0.00
6,000.0	12.04	132.09	5,893.0	-699.0	773.9	1,042.9	0.00	0.00	0.00
6,100.0	12.04	132.09	5,990.8	-713.0	789.4	1,063.7	0.00	0.00	0.00
6,200.0	12.04	132.09	6,088.6	-727.0	804.9	1,084.6	0.00	0.00	0.00
6,298.6	12.04	132.09	6,185.0	-740.8	820.1	1,105.1	0.00	0.00	0.00
TD at 6298.6									


Plan Annotations

Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
600.0	600.0	0.0	0.0	Start Build 1.50
1,402.5	1,396.7	-56.3	62.3	Start 3531.0 hold at 1402.5 MD
4,933.5	4,850.0	-549.9	608.8	D-17-9-16 TGT
6,298.6	6,185.0	-740.8	820.1	TD at 6298.6



Sundry Number: 21115 API Well Number: 43013507010000




Project: USGS Myton SW (UT)
Site: SECTION 8 T9S, R16E
Well: D-17-9-16
Wellbore: Wellbore #1
Design: Design #1



Azimuths to True North
Magnetic North: 11.41°

Magnetic Field
Strength: 52296.8snT
Dip Angle: 65.79°
Date: 12/29/2010
Model: IGRF2010

KOP @ 600'
DOGLENG RATE 1.5 DEG/100
TARGET RADIUS IS 75'

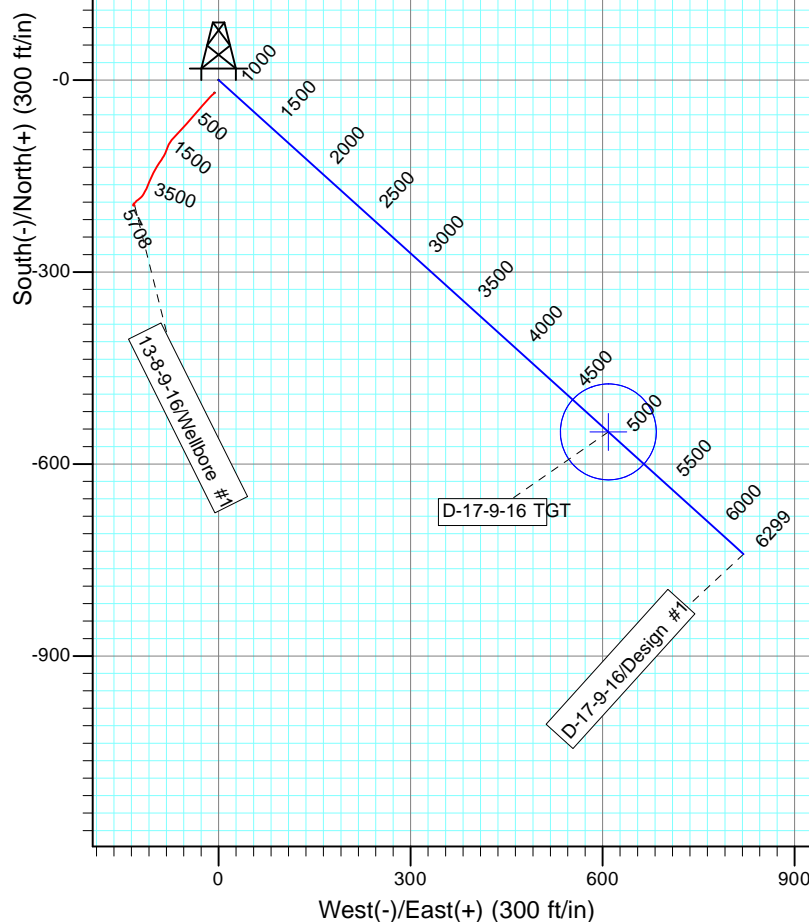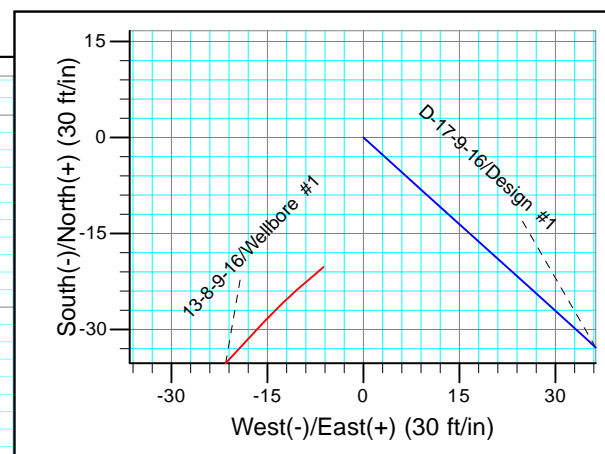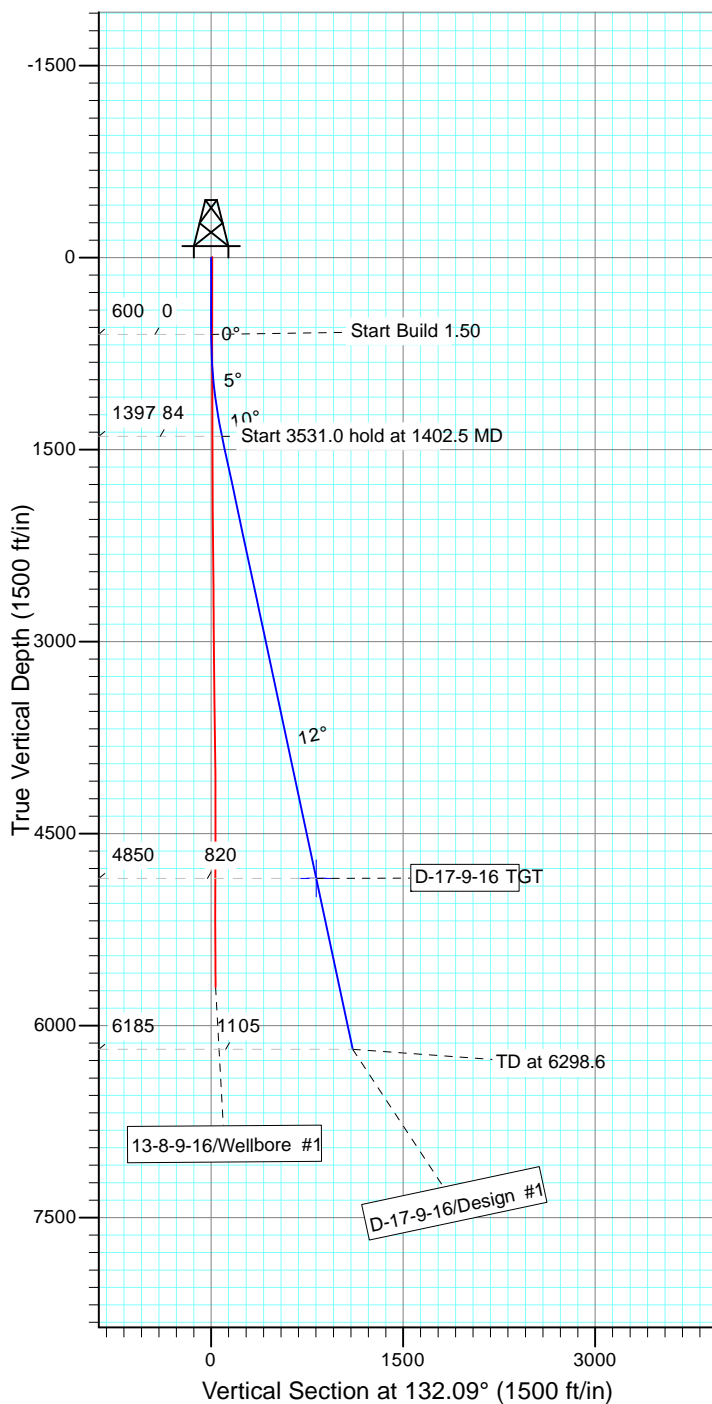

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
D-17-9-16 TGT	4850.0	-549.9	608.8	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1402.5	12.04	132.09	1396.7	-56.3	62.3	1.50	132.09	84.0	
4	4933.5	12.04	132.09	4850.0	-549.9	608.8	0.00	0.00	820.4	D-17-9-16 TGT
5	6298.6	12.04	132.09	6185.0	-740.8	820.1	0.00	0.00	1105.1	



RECEIVED Dec. 08, 2011

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-74390
1. TYPE OF WELL Oil Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052		8. WELL NAME and NUMBER: GMBU D-17-9-16
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0578 FSL 0791 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSW Section: 08 Township: 09.0S Range: 16.0E Meridian: S		9. API NUMBER: 43013507010000
PHONE NUMBER: 435 646-4825 Ext		9. FIELD and POOL or WILDCAT: MONUMENT BUTTE
COUNTY: DUCHESNE		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> ALTER CASING	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CASING REPAIR	
<input checked="" type="checkbox"/> DRILLING REPORT Report Date: 1/24/2012	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	
	<input type="checkbox"/> CHANGE TUBING	
	<input type="checkbox"/> CHANGE WELL STATUS	
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	
	<input type="checkbox"/> CONVERT WELL TYPE	
	<input type="checkbox"/> DEEPEN	
	<input type="checkbox"/> FRACTURE TREAT	
	<input type="checkbox"/> NEW CONSTRUCTION	
	<input type="checkbox"/> OPERATOR CHANGE	
	<input type="checkbox"/> PLUG AND ABANDON	
	<input type="checkbox"/> PLUG BACK	
	<input checked="" type="checkbox"/> PRODUCTION START OR RESUME	
	<input type="checkbox"/> RECLAMATION OF WELL SITE	
	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	
	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	
	<input type="checkbox"/> TEMPORARY ABANDON	
	<input type="checkbox"/> TUBING REPAIR	
	<input type="checkbox"/> VENT OR FLARE	
	<input type="checkbox"/> WATER DISPOSAL	
	<input type="checkbox"/> WATER SHUTOFF	
	<input type="checkbox"/> SI TA STATUS EXTENSION	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	
	<input type="checkbox"/> OTHER: <input style="width: 100px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. The above well was placed on production on 01/24/2012 at 17:00 hours.		
Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY January 27, 2012		
NAME (PLEASE PRINT) Jennifer Peatross	PHONE NUMBER 435 646-4885	TITLE Production Technician
SIGNATURE N/A	DATE 1/26/2012	

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well ☒ Oil Well ☐ Gas Well ☐ Dry ☐ Other
b. Type of Completion: ☒ New Well ☐ Work Over ☐ Deepen ☐ Plug Back ☐ Diff. Resvr.,
Other: _____

2. Name of Operator
NEWFIELD EXPLORATION COMPANY

3. Address
1401 17TH ST. SUITE 1000 DENVER, CO 80202

3a. Phone No. (include area code)
(435) 646-3721

4. Location of Well (Report location clearly and in accordance with Federal requirements)*

At surface 578' FSL & 791' FWL (SW/SW) SEC. 8, T9S, R16E (UTU-74390)

At top prod. interval reported below 26' FSL & 1401' FWL (SE/SW) SEC. 8, T9S, R16E (UTU-74390)

At total depth 177' FNL & 1619' FWL (NE/NW) SEC. 17, T9S, R16E (UTU-74390) BBL by H&M

14. Date Spudded
11/17/2011

15. Date T.D. Reached
12/16/2011

16. Date Completed 01/24/2012
☐ D & A ☒ Ready to Prod.

5. Lease Serial No.
UTU-74390

6. If Indian, Allottee or Tribe Name
NA

7. Unit or CA Agreement Name and No.
GMBU (GRRV)

8. Lease Name and Well No.
GMBU D-17-9-16

10. Field and Pool or Exploratory
MONUMENT BUTTE

11. Sec., T., R., M., on Block and
Survey or Area SEC. 8, T9S, R16E

12. County or Parish
DUCHESNE

13. State
UT

17. Elevations (DF, RKB, RT, GL)*
5984' GL 5997' KB

18. Total Depth: MD 6328'
TVD 6214'

19. Plug Back T.D.: MD 6270'
TVD 6156

20. Depth Bridge Plug Set: MD
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
DUAL IND GRD, SP, COMP. DENSITY, COMP. NEUTRON, GR, CALIPER, CMT BOND

22. Was well cored? ☒ No ☐ Yes (Submit analysis)
Was DST run? ☒ No ☐ Yes (Submit report)
Directional Survey? ☐ No ☒ Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	8-5/8" J-55	24#	0	330'		160 CLASS G			
7-7/8"	5-1/2" J-55	15.5#	0	6315'		250 PRIMLITE		200'	
						425 50/50 POZ			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-7/8"	EOT@ 5356'	TA @ 5258'						

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Green River	4854'	5294'	4854-5294'	.34"	36	
B)						
C)						
D)						

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Depth Interval	Amount and Type of Material
4854-5294'	Frac w/258760# 20/40 white sand in 2054 Lightning 17 fluid, in 3 stages.

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
1/19/12	1/30/12	24	→	28	6	312			2-1/2" x 1-3/4" x 20' x 21' x 24' RHAC Pump
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→					PRODUCING	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

RECEIVED

JAN 21 2012

*(See instructions and spaces for additional data on page 2)

DIV. OF OIL, GAS & MINING

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

29. Disposition of Gas (Solid, used for fuel, vented, etc.)

USED FOR FUEL

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

GEOLOGICAL MARKERS


Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
GREEN RIVER	4854'	5294'		GARDEN GULCH MARKER GARDEN GULCH 1	3808' 4031'
				GARDEN GULCH 2 POINT 3 MRKR	4143' 4406'
				X MRKR Y MRKR	4670' 4706'
				DOUGLAS CREEK BI-CARBONATE	4821' 5069'
				B LIMESTONE CASTLE PEAK	5174' 5713'
				BASAL CARBONATE	6174'

32. Additional remarks (include plugging procedure):

33. Indicate which items have been attached by placing a check in the appropriate boxes:

- ☐ Electrical/Mechanical Logs (1 full set req'd.)
 ☐ Geologic Report
 ☐ DST Report
 ☒ Directional Survey
☐ Sundry Notice for plugging and cement verification
 ☐ Core Analysis
 ☒ Other: Drilling Daily Activity

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Jennifer Peatross
 Signature 


Title Production Technician
 Date 02/23/2012

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 3)

(Form 3160-4, page 2)

NEWFIELD



NEWFIELD EXPLORATION

USGS Myton SW (UT)

SECTION 8 T9S, R16E


D-17-9-16

Wellbore #1

Design: Actual

Standard Survey Report

29 December, 2011





Payzone Directional Survey Report



Company: NEWFIELD EXPLORATION
Project: USGS Myton SW (UT)
Site: SECTION 8 T9S, R16E
Well: D-17-9-16
Wellbore: Wellbore #1
Design: Actual

Local Co-ordinate Reference: Well D-17-9-16
TVD Reference: D-17-9-16 @ 5996.0ft (Capstar 329)
MD Reference: D-17-9-16 @ 5996.0ft (Capstar 329)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.21 Single User Db

Project USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA

Map System: US State Plane 1983
Geo Datum: North American Datum 1983
Map Zone: Utah Central Zone
System Datum: Mean Sea Level

Site SECTION 8 T9S, R16E, SEC 8 T9S, R16E

Site Position:
From: Lat/Long
Position Uncertainty: 0.0 ft
Northing: 7,188,200.00 ft
Easting: 2,019,900.00 ft
Slot Radius: "
Latitude: 40° 2' 44.068 N
Longitude: 110° 8' 39.874 W
Grid Convergence: 0.87 °

Well D-17-9-16, SHL LAT: 40 02 23.10 LONG: -110 08 59.33

Well Position +N/-S 0.0 ft Northing: 7,186,055.78 ft Latitude: 40° 2' 23.100 N
+E/-W 0.0 ft Easting: 2,018,419.24 ft Longitude: 110° 8' 59.330 W
Position Uncertainty 0.0 ft Wellhead Elevation: 5,996.0 ft Ground Level: 5,984.0 ft

Wellbore Wellbore #1

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	12/29/2010	11.41	65.79	52,297

Design Actual

Audit Notes:

Version: 1.0 **Phase:** ACTUAL **Tie On Depth:** 0.0
Vertical Section: Depth From (TVD) (ft) +N/-S (ft) +E/-W (ft) Direction (°)
0.0 0.0 0.0 132.09

Survey Program Date 12/29/2011

From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description
315.0	6,328.0	Survey #1 (Wellbore #1)	MWD	MWD - Standard

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
315.0	0.40	56.90	315.0	0.6	0.9	0.3	0.13	0.13	0.00
345.0	0.40	114.70	345.0	0.6	1.1	0.4	1.29	0.00	192.67
376.0	0.40	114.40	376.0	0.5	1.3	0.6	0.01	0.00	-0.97
406.0	0.40	118.70	406.0	0.4	1.5	0.8	0.10	0.00	14.33
437.0	0.90	120.60	437.0	0.3	1.8	1.2	1.61	1.61	6.13
467.0	1.30	120.40	467.0	0.0	2.3	1.7	1.33	1.33	-0.67
497.0	1.40	119.80	497.0	-0.4	2.9	2.4	0.34	0.33	-2.00
528.0	1.40	122.60	528.0	-0.8	3.5	3.2	0.22	0.00	9.03
559.0	1.40	121.40	559.0	-1.2	4.2	3.9	0.09	0.00	-3.87
589.0	1.40	122.10	589.0	-1.6	4.8	4.6	0.06	0.00	2.33
620.0	1.40	118.90	619.9	-2.0	5.5	5.4	0.25	0.00	-10.32
650.0	1.50	123.70	649.9	-2.4	6.1	6.1	0.52	0.33	16.00



Company: NEWFIELD EXPLORATION
Project: USGS Myton SW (UT)
Site: SECTION 8 T9S, R16E
Well: D-17-9-16
Wellbore: Wellbore #1
Design: Actual

Local Co-ordinate Reference: Well D-17-9-16
TVD Reference: D-17-9-16 @ 5996.0ft (Capstar 329)
MD Reference: D-17-9-16 @ 5996.0ft (Capstar 329)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.21 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
679.0	1.90	134.30	678.9	-2.9	6.8	7.0	1.75	1.38	36.55
710.0	2.50	137.60	709.9	-3.8	7.6	8.2	1.98	1.94	10.65
740.0	2.80	137.10	739.9	-4.8	8.5	9.5	1.00	1.00	-1.67
770.0	3.20	135.30	769.8	-5.9	9.6	11.1	1.37	1.33	-6.00
802.0	3.60	136.10	801.8	-7.3	10.9	13.0	1.26	1.25	2.50
833.0	4.10	133.10	832.7	-8.7	12.4	15.1	1.74	1.61	-9.68
864.0	4.80	133.10	863.6	-10.4	14.2	17.5	2.26	2.26	0.00
909.0	6.00	136.00	908.4	-13.3	17.2	21.7	2.73	2.67	6.44
954.0	6.60	136.80	953.1	-16.9	20.6	26.6	1.35	1.33	1.78
1,000.0	7.10	138.30	998.8	-21.0	24.3	32.1	1.15	1.09	3.26
1,045.0	7.80	137.30	1,043.4	-25.3	28.2	37.9	1.58	1.56	-2.22
1,090.0	8.20	136.90	1,088.0	-29.9	32.5	44.1	0.90	0.89	-0.89
1,136.0	9.00	137.50	1,133.5	-34.9	37.2	51.0	1.75	1.74	1.30
1,181.0	9.80	138.50	1,177.9	-40.4	42.1	58.3	1.81	1.78	2.22
1,226.0	10.50	138.70	1,222.2	-46.3	47.3	66.2	1.56	1.56	0.44
1,272.0	10.90	137.80	1,267.4	-52.7	53.0	74.7	0.94	0.87	-1.96
1,317.0	10.90	137.80	1,311.5	-59.0	58.7	83.1	0.00	0.00	0.00
1,362.0	11.20	137.60	1,355.7	-65.4	64.5	91.7	0.67	0.67	-0.44
1,408.0	12.00	135.80	1,400.8	-72.1	70.9	100.9	1.91	1.74	-3.91
1,453.0	12.00	132.30	1,444.8	-78.6	77.6	110.3	1.62	0.00	-7.78
1,498.0	12.10	132.00	1,488.8	-84.9	84.6	119.7	0.26	0.22	-0.67
1,544.0	12.70	131.30	1,533.7	-91.5	91.9	129.6	1.34	1.30	-1.52
1,589.0	12.60	131.90	1,577.6	-98.0	99.3	139.4	0.37	-0.22	1.33
1,634.0	12.40	130.40	1,621.6	-104.4	106.6	149.1	0.85	-0.44	-3.33
1,680.0	12.20	130.10	1,666.5	-110.8	114.1	158.9	0.46	-0.43	-0.65
1,725.0	12.10	129.90	1,710.5	-116.9	121.4	168.4	0.24	-0.22	-0.44
1,770.0	12.30	130.30	1,754.5	-123.0	128.7	177.9	0.48	0.44	0.89
1,816.0	12.00	129.50	1,799.5	-129.2	136.1	187.6	0.75	-0.65	-1.74
1,861.0	11.70	129.60	1,843.5	-135.1	143.2	196.8	0.67	-0.67	0.22
1,906.0	11.90	130.90	1,887.5	-141.0	150.2	206.0	0.74	0.44	2.89
1,952.0	12.50	132.00	1,932.5	-147.5	157.5	215.7	1.40	1.30	2.39
1,997.0	12.60	131.10	1,976.4	-154.0	164.8	225.5	0.49	0.22	-2.00
2,042.0	11.90	131.10	2,020.4	-160.2	172.0	235.1	1.56	-1.56	0.00
2,087.0	12.10	132.30	2,064.4	-166.5	179.0	244.4	0.71	0.44	2.67
2,133.0	12.20	131.50	2,109.4	-172.9	186.2	254.1	0.43	0.22	-1.74
2,178.0	12.30	131.80	2,153.4	-179.3	193.3	263.6	0.26	0.22	0.67
2,223.0	12.00	132.40	2,197.4	-185.6	200.4	273.1	0.72	-0.67	1.33
2,269.0	12.20	135.80	2,242.3	-192.3	207.3	282.7	1.61	0.43	7.39
2,314.0	11.90	138.50	2,286.3	-199.2	213.7	292.1	1.42	-0.67	6.00
2,359.0	12.30	138.10	2,330.3	-206.2	220.0	301.5	0.91	0.89	-0.89
2,404.0	12.00	138.30	2,374.3	-213.3	226.3	310.9	0.67	-0.67	0.44
2,450.0	11.70	138.10	2,419.4	-220.3	232.6	320.3	0.66	-0.65	-0.43
2,495.0	11.60	137.40	2,463.4	-227.1	238.7	329.3	0.38	-0.22	-1.56
2,540.0	11.50	137.10	2,507.5	-233.7	244.8	338.3	0.26	-0.22	-0.67
2,586.0	11.40	134.40	2,552.6	-240.2	251.2	347.4	1.19	-0.22	-5.87
2,631.0	11.10	132.90	2,596.7	-246.3	257.5	356.2	0.93	-0.67	-3.33
2,676.0	10.90	132.00	2,640.9	-252.1	263.9	364.8	0.59	-0.44	-2.00
2,722.0	10.90	131.50	2,686.1	-257.9	270.3	373.5	0.21	0.00	-1.09
2,767.0	11.30	131.90	2,730.2	-263.6	276.8	382.1	0.91	0.89	0.89
2,812.0	11.80	130.20	2,774.3	-269.6	283.6	391.1	1.34	1.11	-3.78
2,858.0	12.10	128.70	2,819.3	-275.6	291.0	400.7	0.94	0.65	-3.26
2,903.0	13.00	130.10	2,863.3	-281.8	298.5	410.4	2.11	2.00	3.11
2,948.0	13.80	128.90	2,907.0	-288.4	306.6	420.8	1.88	1.78	-2.67
2,994.0	14.30	128.80	2,951.7	-295.5	315.3	432.0	1.09	1.09	-0.22



Payzone Directional Survey Report



Company: NEWFIELD EXPLORATION
Project: USGS Myton SW (UT)
Site: SECTION 8 T9S, R16E
Well: D-17-9-16
Wellbore: Wellbore #1
Design: Actual

Local Co-ordinate Reference: Well D-17-9-16
TVD Reference: D-17-9-16 @ 5996.0ft (Capstar 329)
MD Reference: D-17-9-16 @ 5996.0ft (Capstar 329)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.21 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
3,039.0	14.30	128.20	2,995.3	-302.4	324.0	443.1	0.33	0.00	-1.33
3,084.0	13.40	127.00	3,039.0	-308.9	332.5	453.8	2.10	-2.00	-2.67
3,130.0	12.90	128.10	3,083.7	-315.3	340.8	464.3	1.22	-1.09	2.39
3,175.0	13.10	128.40	3,127.6	-321.6	348.7	474.4	0.47	0.44	0.67
3,220.0	12.20	129.20	3,171.5	-327.8	356.4	484.2	2.04	-2.00	1.78
3,266.0	11.40	131.60	3,216.5	-333.9	363.6	493.6	2.04	-1.74	5.22
3,311.0	12.10	136.40	3,260.6	-340.2	370.2	502.7	2.67	1.56	10.67
3,366.0	12.70	138.20	3,314.3	-348.9	378.2	514.5	1.30	1.09	3.27
3,402.0	12.50	136.50	3,349.4	-354.7	383.5	522.3	1.17	-0.56	-4.72
3,447.0	12.80	133.90	3,393.3	-361.7	390.4	532.2	1.43	0.67	-5.78
3,492.0	12.60	133.10	3,437.2	-368.5	397.6	542.1	0.59	-0.44	-1.78
3,538.0	12.20	133.20	3,482.2	-375.2	404.8	551.9	0.87	-0.87	0.22
3,583.0	11.80	132.00	3,526.2	-381.6	411.7	561.3	1.05	-0.89	-2.67
3,628.0	11.20	131.70	3,570.3	-387.6	418.4	570.3	1.34	-1.33	-0.67
3,674.0	10.60	131.60	3,615.5	-393.3	424.9	579.0	1.30	-1.30	-0.22
3,719.0	11.70	132.00	3,659.6	-399.1	431.4	587.7	2.45	2.44	0.89
3,764.0	12.50	132.50	3,703.6	-405.5	438.3	597.1	1.79	1.78	1.11
3,810.0	11.70	132.00	3,748.6	-412.0	445.5	606.7	1.75	-1.74	-1.09
3,855.0	11.10	128.40	3,792.7	-417.7	452.3	615.6	2.07	-1.33	-8.00
3,900.0	11.40	126.20	3,836.8	-423.0	459.3	624.4	1.16	0.67	-4.89
3,946.0	11.90	127.20	3,881.9	-428.6	466.7	633.6	1.17	1.09	2.17
3,991.0	12.10	129.80	3,925.9	-434.4	474.0	642.9	1.28	0.44	5.78
4,036.0	11.60	129.40	3,969.9	-440.3	481.1	652.2	1.13	-1.11	-0.89
4,082.0	12.90	128.90	4,014.9	-446.5	488.7	661.9	2.84	2.83	-1.09
4,127.0	13.00	129.00	4,058.7	-452.8	496.6	672.0	0.23	0.22	0.22
4,172.0	12.70	129.90	4,102.6	-459.2	504.3	682.0	0.80	-0.67	2.00
4,218.0	12.40	129.10	4,147.5	-465.5	512.0	692.0	0.75	-0.65	-1.74
4,263.0	12.00	129.50	4,191.5	-471.5	519.4	701.5	0.91	-0.89	0.89
4,308.0	12.10	130.10	4,235.5	-477.5	526.6	710.9	0.36	0.22	1.33
4,354.0	12.50	130.60	4,280.5	-483.9	534.0	720.7	0.90	0.87	1.09
4,399.0	12.10	130.40	4,324.4	-490.1	541.3	730.2	0.89	-0.89	-0.44
4,445.0	12.20	129.90	4,369.4	-496.4	548.7	739.9	0.32	0.22	-1.09
4,490.0	12.00	131.10	4,413.4	-502.5	555.9	749.3	0.71	-0.44	2.67
4,535.0	11.90	133.60	4,457.4	-508.8	562.8	758.7	1.17	-0.22	5.56
4,581.0	11.90	133.40	4,502.4	-515.3	569.7	768.1	0.09	0.00	-0.43
4,626.0	11.30	134.80	4,546.5	-521.6	576.2	777.2	1.47	-1.33	3.11
4,671.0	11.40	131.70	4,590.6	-527.6	582.6	786.0	1.37	0.22	-6.89
4,717.0	11.60	129.00	4,635.7	-533.6	589.6	795.2	1.25	0.43	-5.87
4,762.0	11.70	131.00	4,679.8	-539.4	596.6	804.3	0.92	0.22	4.44
4,807.0	12.40	134.40	4,723.8	-545.8	603.5	813.7	2.21	1.56	7.56
4,851.0	12.30	134.20	4,766.8	-552.4	610.2	823.1	0.25	-0.23	-0.45
4,898.0	11.90	134.80	4,812.7	-559.3	617.2	832.9	0.89	-0.85	1.28
4,931.8	12.28	134.72	4,845.8	-564.3	622.2	840.0	1.11	1.11	-0.22
D-17-9-16 TGT									
4,943.0	12.40	134.70	4,856.7	-565.9	623.9	842.4	1.11	1.11	-0.22
4,989.0	12.00	133.90	4,901.7	-572.7	630.9	852.1	0.94	-0.87	-1.74
5,034.0	12.00	133.80	4,945.7	-579.2	637.6	861.4	0.05	0.00	-0.22
5,079.0	11.10	134.50	4,989.8	-585.5	644.1	870.4	2.02	-2.00	1.56
5,125.0	11.30	132.70	5,034.9	-591.6	650.6	879.4	0.88	0.43	-3.91
5,170.0	11.60	134.80	5,079.0	-597.8	657.0	888.3	1.14	0.67	4.67
5,215.0	11.00	133.10	5,123.1	-603.9	663.4	897.1	1.52	-1.33	-3.78
5,261.0	11.50	135.30	5,168.3	-610.2	669.8	906.1	1.43	1.09	4.78
5,306.0	12.50	137.60	5,212.3	-617.0	676.2	915.4	2.46	2.22	5.11
5,352.0	11.60	135.80	5,257.3	-624.0	682.8	925.0	2.12	-1.96	-3.91



Company: NEWFIELD EXPLORATION
Project: USGS Myton SW (UT)
Site: SECTION 8 T9S, R16E
Well: D-17-9-16
Wellbore: Wellbore #1
Design: Actual

Local Co-ordinate Reference: Well D-17-9-16
TVD Reference: D-17-9-16 @ 5996.0ft (Capstar 329)
MD Reference: D-17-9-16 @ 5996.0ft (Capstar 329)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.21 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,397.0	10.60	135.10	5,301.4	-630.2	688.9	933.6	2.24	-2.22	-1.56
5,442.0	10.80	133.40	5,345.6	-636.0	694.9	942.0	0.83	0.44	-3.78
5,487.0	11.70	129.40	5,389.8	-641.8	701.5	950.7	2.65	2.00	-8.89
5,533.0	12.20	130.00	5,434.8	-647.9	708.8	960.3	1.12	1.09	1.30
5,578.0	12.10	128.83	5,478.8	-653.9	716.1	969.7	0.59	-0.22	-2.60
5,623.0	12.30	127.60	5,522.8	-659.8	723.6	979.2	0.73	0.44	-2.73
5,669.0	11.40	127.60	5,567.8	-665.5	731.1	988.6	1.96	-1.96	0.00
5,714.0	11.40	129.10	5,611.9	-671.0	738.1	997.5	0.66	0.00	3.33
5,759.0	11.80	130.10	5,656.0	-676.8	745.0	1,006.5	0.99	0.89	2.22
5,805.0	12.30	132.50	5,700.9	-683.1	752.2	1,016.1	1.54	1.09	5.22
5,850.0	11.70	131.60	5,745.0	-689.4	759.2	1,025.5	1.40	-1.33	-2.00
5,895.0	12.60	133.90	5,789.0	-695.8	766.1	1,035.0	2.27	2.00	5.11
5,941.0	12.10	133.20	5,833.9	-702.6	773.3	1,044.8	1.13	-1.09	-1.52
5,986.0	11.90	133.50	5,877.9	-709.1	780.1	1,054.2	0.47	-0.44	0.67
6,031.0	11.30	131.80	5,922.0	-715.2	786.7	1,063.2	1.53	-1.33	-3.78
6,077.0	11.80	132.30	5,967.1	-721.4	793.6	1,072.4	1.11	1.09	1.09
6,122.0	11.20	134.00	6,011.2	-727.5	800.1	1,081.4	1.53	-1.33	3.78
6,167.0	11.80	134.40	6,055.3	-733.7	806.5	1,090.3	1.35	1.33	0.89
6,213.0	10.90	134.70	6,100.4	-740.1	813.0	1,099.4	1.96	-1.96	0.65
6,258.0	10.20	134.80	6,144.6	-745.9	818.8	1,107.6	1.56	-1.56	0.22
6,272.0	10.20	134.40	6,158.4	-747.6	820.6	1,110.1	0.51	0.00	-2.86
6,328.0	10.20	134.40	6,213.5	-754.6	827.7	1,120.0	0.00	0.00	0.00




Checked By: _____ Approved By: _____ Date: _____



Project: USGS Myton SW (UT)
 Site: SECTION 8 T9S, R16E
 Well: D-17-9-16
 Wellbore: Wellbore #1
 Design: Actual

Azimuths to True North
 Magnetic North: 11.41°

Magnetic Field
 Strength: 52296.8snT
 Dip Angle: 65.79°
 Date: 12/29/2010
 Model: IGRF2010

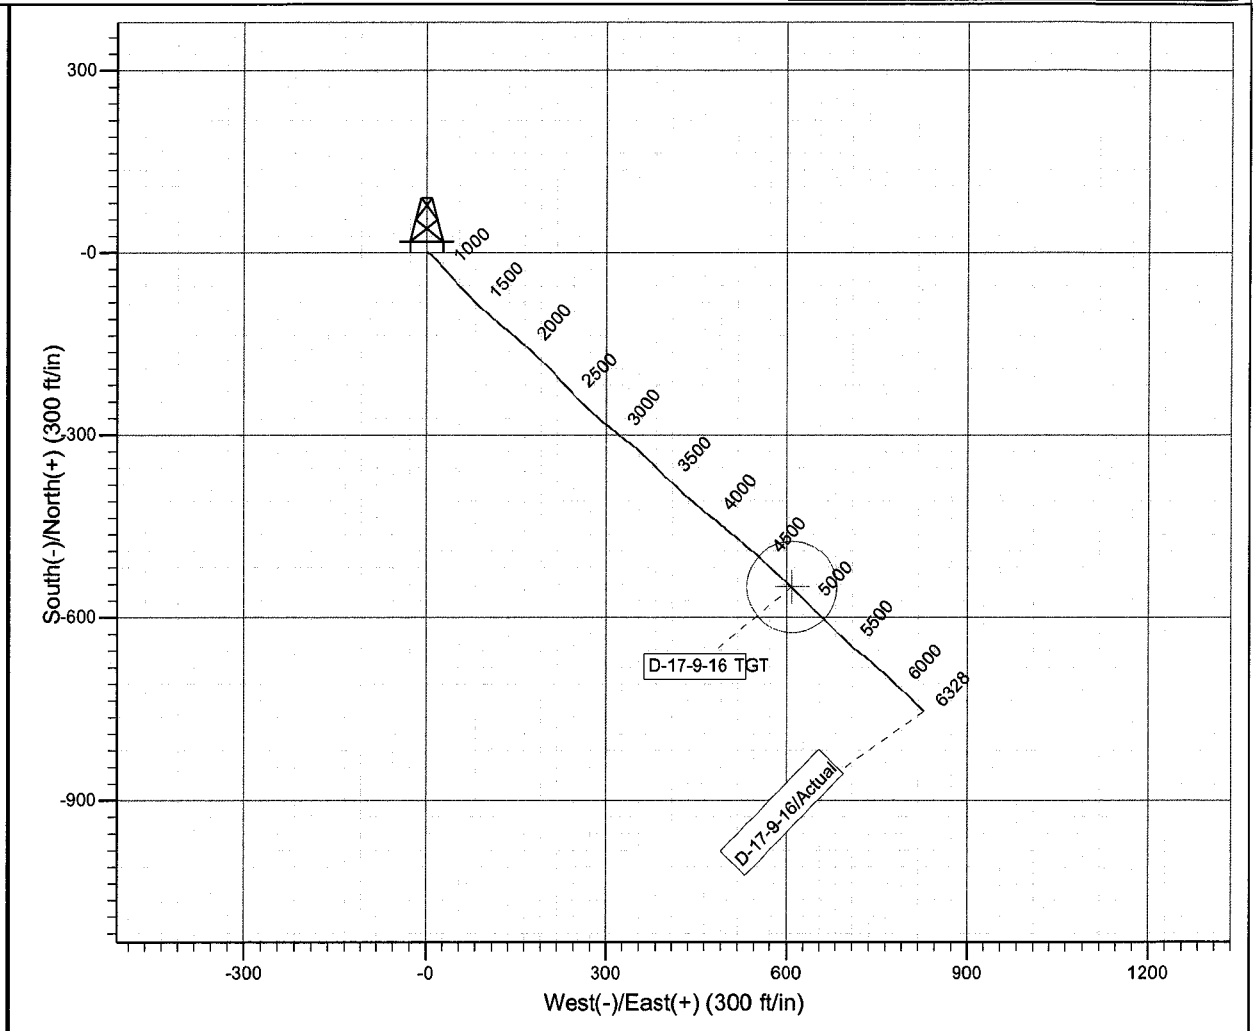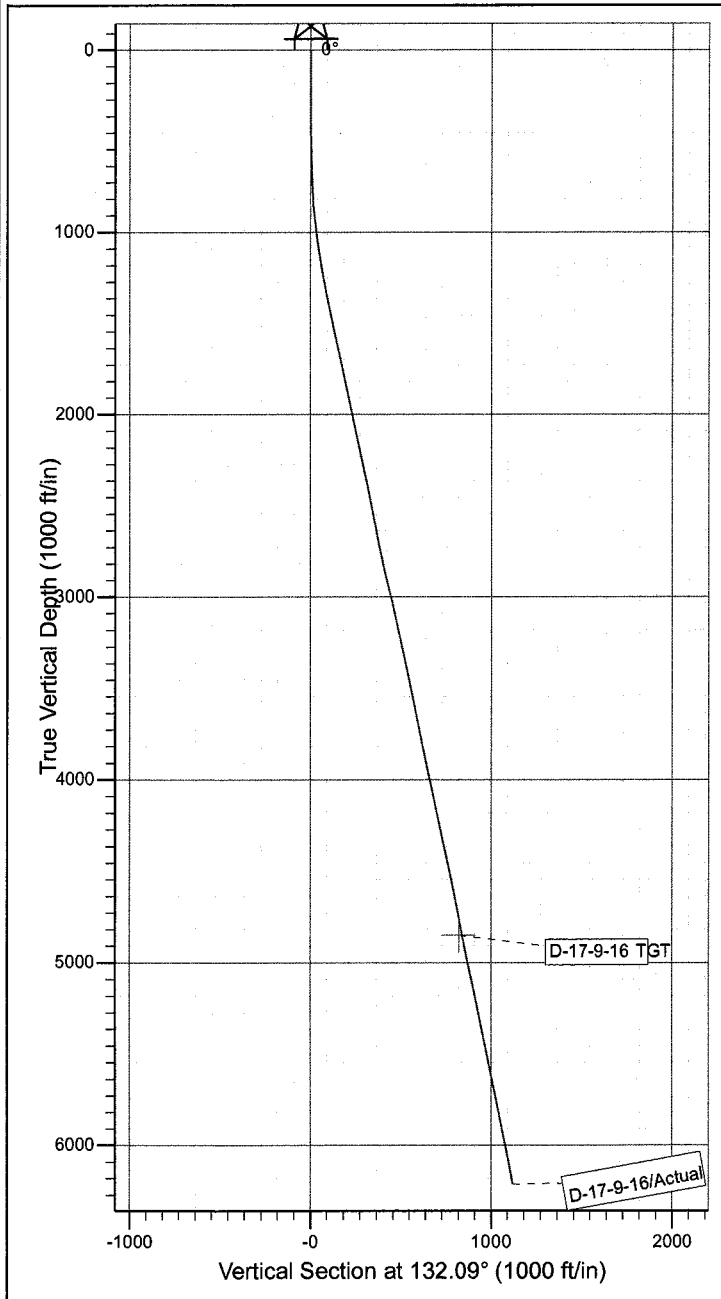

Design: Actual (D-17-9-16/Wellbore #1)

Created By: Sarah Webb Date: 20:21, December 29 201

THIS SURVEY IS CORRECT TO THE BEST OF
 MY KNOWLEDGE AND IS SUPPORTED
 BY ACTUAL FIELD DATA

Daily Activity Report

Format For Sundry

GMBU D-17-9-16

10/1/2011 To 2/29/2012

GMBU D-17-9-16

Waiting on Cement

Date: 11/21/2011

Ross #26 at 330. Days Since Spud - yield. Returned 1bbls to pit, bump plug to 452psi, BLM and State were notified of spud via email. - 330.92'KB. On 11/21/11 cement w/BJ w/160 sks of class G+2%kcl+.25#CF mixed @ 15.8ppg and 1.17 - On 11/17/11 Ross #31 spud and drilled 330' of 12 1/4" hole, P/U and run 7 jts of 8 5/8" casing set

Daily Cost: \$0

Cumulative Cost: \$56,046

GMBU D-17-9-16

TIH

Date: 12/12/2011

Capstar #329 at 330. 0 Days Since Spud - Repair broken boom - upper kelly valve to 2000 psi, test annular to 1500 psi, test casing to 1500 psi for 30 min. - Test stack as follows: Test rams, choke manifold, choke line valves, kill line valves, floor valves - Nipple up BOP - Move rig - Rig down - Finish rig up flare lines - P/U bit, mud motor and directional tools, scribe and test same. - TIH - Tag cement @ 270', Preparing to drill cement.

Daily Cost: \$0

Cumulative Cost: \$100,497

GMBU D-17-9-16

Drill 7 7/8" hole with fresh water

Date: 12/13/2011

Capstar #329 at 3276. 1 Days Since Spud - Rotate and slide drill from 1645' to 2551' = 906' @ 151 fph - Rotate and slide drill from 920' to 1645' = 725' @ 145 fph - Slip and cut 175' of drilling line - Lubricate rig - Rotate and slide drill from 330' to 920' = 590' @ 118 fph - Drill cement from 270' to 330' - Rotate and slide drill from 2551' to 3276' = 725' @ 121 fph

Daily Cost: \$0

Cumulative Cost: \$153,463

GMBU D-17-9-16

Drill 7 7/8" hole with fresh water

Date: 12/14/2011

Capstar #329 at 5181. 2 Days Since Spud - Rotate and slide drill from 4827' to 5181' = 354' @ 59 fph - Rotate and slide drill from 4410' to 4827' = 417' @ 70 fph - Lubricate rig - Rotate and slide drill from 3276' to 4274' = 998' @ 105 fph - Rotate and slide drill from 4274' to 4410' = 136' @ 68 fph.

Daily Cost: \$0

Cumulative Cost: \$183,204

GMBU D-17-9-16

TOOH

Date: 12/15/2011

Capstar #329 at 6328. 3 Days Since Spud - Rotate and slide drill from 5181' to 5408' = 227' @ 51 fph - Rig service - Rotate and slide drill from 5408' to 6328' = 920' @ 64 fph. - TOOH for logs and run csg. - Pump 2 high vis (80) sweeps around and then B/U

Daily Cost: \$0

Cumulative Cost: \$218,761

GMBU D-17-9-16**Wait on Completion****Date:** 12/16/2011

Capstar #329 at 6328. 4 Days Since Spud - Install Cement Head, Test Lines to 3500 psi, Pump 250 sk Lead cement at 11.0 ppg and 3.53 yield - Circulate Casing, Rig up Cementers - will be transferred to Next well (GMBU G-8-9-16) - Run 5.5" Casing. Run 155 jts 5.5", J-55, 15.5#, LTC Casing Shoe set @ 6314', Float Collar @ 6270'. 4 jts - Safety Stand Down. Identify Pinch Points, Trip Hazards Around Rig. - R/U Run 10 jts 5.5" J-55, 15.5# LTC Casing - R/U Phoenix Surveys, Run Triple Combo Logs. Loggers TD 6322' - LDDP & BHA - (50:50.2 + 3%KCL +0.5%EC-1 +.25#CF +.05#SF +.3SMS +FP-6L) Displaced with 149bbls, returned trace - Cement to Pit, Bumped Plug to 1550 psi - Rig Down Cementers, Nipple Down Bop's - Clean Mud Pits - Released Rig @ 06:00 AM 12/16/11 Don Bastian - (PLII +3%KCL +5#CSE +0.5#CF +5#KOL +.5SMS +FP +SF) pumped tail cement @ 14.4 ppg & 1.24 yield **Finalized**

Daily Cost: \$0**Cumulative Cost:** \$350,351

Pertinent Files: Go to File List