

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL						1. WELL NAME and NUMBER GMBU 1A-32-8-17H								
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>						3. FIELD OR WILDCAT MONUMENT BUTTE								
4. TYPE OF WELL Oil Well Coalbed Methane Well: NO						5. UNIT or COMMUNITIZATION AGREEMENT NAME GMBU (GRRV)								
6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY						7. OPERATOR PHONE 435 646-4825								
8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Myton, UT, 84052						9. OPERATOR E-MAIL mcrozier@newfield.com								
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) ML-22060			11. MINERAL OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>			12. SURFACE OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>								
13. NAME OF SURFACE OWNER (if box 12 = 'fee')						14. SURFACE OWNER PHONE (if box 12 = 'fee')								
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')						16. SURFACE OWNER E-MAIL (if box 12 = 'fee')								
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')			18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>			19. SLANT VERTICAL <input type="checkbox"/> DIRECTIONAL <input type="checkbox"/> HORIZONTAL <input checked="" type="checkbox"/>								
20. LOCATION OF WELL		FOOTAGES		QTR-QTR		SECTION		TOWNSHIP		RANGE		MERIDIAN		
LOCATION AT SURFACE		797 FNL 863 FEL		NENE		32		8.0 S		17.0 E		S		
Top of Uppermost Producing Zone		797 FNL 863 FEL		NENE		32		8.0 S		17.0 E		S		
At Total Depth		220 FSL 2420 FWL		SESW		32		8.0 S		17.0 E		S		
21. COUNTY DUCHESNE			22. DISTANCE TO NEAREST LEASE LINE (Feet) 220			23. NUMBER OF ACRES IN DRILLING UNIT 640								
			25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 1320			26. PROPOSED DEPTH MD: 10687 TVD: 6051								
27. ELEVATION - GROUND LEVEL 5193			28. BOND NUMBER B001834			29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 43-7478								
Hole, Casing, and Cement Information														
String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement	Sacks	Yield	Weight				
SURF	12.25	8.625	0 - 300	24.0	J-55 ST&C	8.3	Class G	122	1.17	15.8				
PROD	7.875	5.5	0 - 6500	20.0	N-80 LT&C	9.0	Premium Lite High Strength	220	3.53	11.0				
							50/50 Poz	285	1.24	14.3				
T1	7.875	4.5	6500 - 10687	11.6	P-110 LT&C		No Used	0	0.0	0.0				
							No Used	0	0.0	0.0				
ATTACHMENTS														
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES														
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER						<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN								
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)						<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER								
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)						<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP								
NAME Mandie Crozier				TITLE Regulatory Tech				PHONE 435 646-4825						
SIGNATURE				DATE 09/09/2011				EMAIL mcrozier@newfield.com						
API NUMBER ASSIGNED 43013509600000				APPROVAL				 Permit Manager						

Newfield Production Company
Greater Monument Butte Unit 1A-32-8-17H
NE/NE Section 32, T8S, R17E
Duchesne County, UT

Drilling Program

1. Formation Tops

Uinta	surface		
Green River	1,603'		
Garden Gulch member	3,892'		
TD	6,051'	TVD /	10,687' MD

2. Depth to Oil, Gas, Water, or Minerals

Base of moderately saline	50'	(water)
Green River	3,892' - 6,051'	(oil)

3. Pressure Control

Section BOP Description

Surface No control

Production The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc for a 2M system.

A 2M BOP system will consist of 2 ram preventers (double or two singles), and a rotating head. A choke manifold rated to at least 2,000 psi will be used.

4. Casing

Description	Interval		Weight (ppf)	Grade	Coup	Pore Press @ Shoe	MW @ Shoe	Frac Grad @ Shoe	Safety Factors		
	Top	Bottom (TVD/MD)							Burst	Collapse	Tension
Surface	0'	300'	24	J-55	STC	8.33	8.33	12	2,950	1,370	244,000
8 5/8"									17.53	14.35	33.89
Production	0'	6,186'	20	N-80	LTC	8.33	9.0	--	9,190	8,830	428,000
5 1/2"		6,500'							4.46	3.88	3.46
Production	6,500'	6,051'	11.6	P-110	LTC	8.33	9.0	--	10,690	7,560	279,000
4 1/2"		10,687'							5.30	3.40	5.19

A tapered string of production casing will be run. A 7-7/8" hole will be drilled for the 5-1/2" casing in the vertical and curve sections of the well. A 6-1/8" hole will be drilled for the 4-1/2" casing in the lateral section of the well.

Assumptions:

Surface casing MASP = (frac gradient + 1.0 ppg) - (gas gradient)

Production casing MASP = (reservoir pressure) - (gas gradient)

All collapse calculations assume fully evacuated casing with a gas gradient
 All tension calculations assume air weight of casing
 Gas gradient = 0.1 psi/ft

All casing shall be new.

All casing strings shall have a minimum of 1 centralizer on each of the bottom 3 joints.

5. Cement

Job	Hole Size	Fill	Slurry Description	ft ³	OH excess	Weight (ppg)	Yield (ft ³ /sk)
				sacks			
Surface	12 1/4	300'	Class G w/ 2% KCl + 0.25 lbs/sk Cello Flake	142	15%	15.8	1.17
				122			
Production Lead	7 7/8	3,892'	Premium Lite II w/ 3% KCl + 10% bentonite	776	15%	11.0	3.53
				220			
Production Tail	7 7/8	1,773'	50/50 Poz/Class G w/ 3% KCl + 2% bentonite	353	15%	14.3	1.24
				285			

The surface casing will be cemented to surface. In the event that cement does not reach surface during the primary cement job, a remedial job will be performed.

A system of open hole packers will be used to isolate frac stages in the lateral. Open hole packers will be used to isolate the vertical portion of the well from the lateral. A port collar will be used to cement the vertical portion of the well.

Actual cement volumes for the production casing string will be calculated from an open hole caliper log, plus 15% excess.

6. Type and Characteristics of Proposed Circulating Medium

<u>Interval</u>	<u>Description</u>
Surface - 300'	An air and/or fresh water system will be utilized. If an air rig is used, the blooie line discharge may be less than 100' from the wellbore in order to minimize location size. The blooie line is not equipped with an automatic igniter. The air compressor may be located less than 100' from the well bore due to the low possibility of combustion with the air/dust mixture. Water will be on location to be used as kill fluid, if necessary.
300' - TD	A water based mud system will be utilized. Hole stability may be improved with additions of KCl or a similar inhibitive substance. In order to control formation pressure the system will be weighted with additions of bentonite, and if conditions warrant, with barite. Anticipated maximum mud weight is 9.0 ppg.

7. Logging, Coring, and Testing

Logging: A dual induction, gamma ray, and caliper log will be run from KOP to the base of the surface casing. A compensated neutron/formation density log will be run from KOP to

the top of the Garden Gulch formation. A cement bond log will be run from KOP to the cement top behind the production casing.

Cores: As deemed necessary.

DST: There are no DST's planned for this well.

8. Anticipated Abnormal Pressure or Temperature

Maximum anticipated bottomhole pressure will be approximately equal to total depth (feet) multiplied by a 0.43 psi/ft gradient.

$$6,186' \times 0.43 \text{ psi/ft} = 2680 \text{ psi}$$

No abnormal temperature is expected. No H₂S is expected.

9. Other Aspects

The well will be drilled vertically to a kick-off point of 5,665' .

Directional tools will then be used to build to 91.84 degrees inclination.

The hole size in the lateral will be reduced to 6-1/8". The lateral drilled to the bottomhole location shown on the plat.


A tapered string of production casing will be run in the well, with 5-1/2" casing in the vertical and curve portions and 4-1/2" casing in the lateral portion.

A system of open hole packers will be used to provide multi-stage frac isolation in the lateral.

A set of open hole packers will be placed at kick-off point to isolate the lateral. A port cementing collar will placed above the packers and will be used to cement the vertical portion of the well bore.

CONFIDENTIAL

Access Road Map

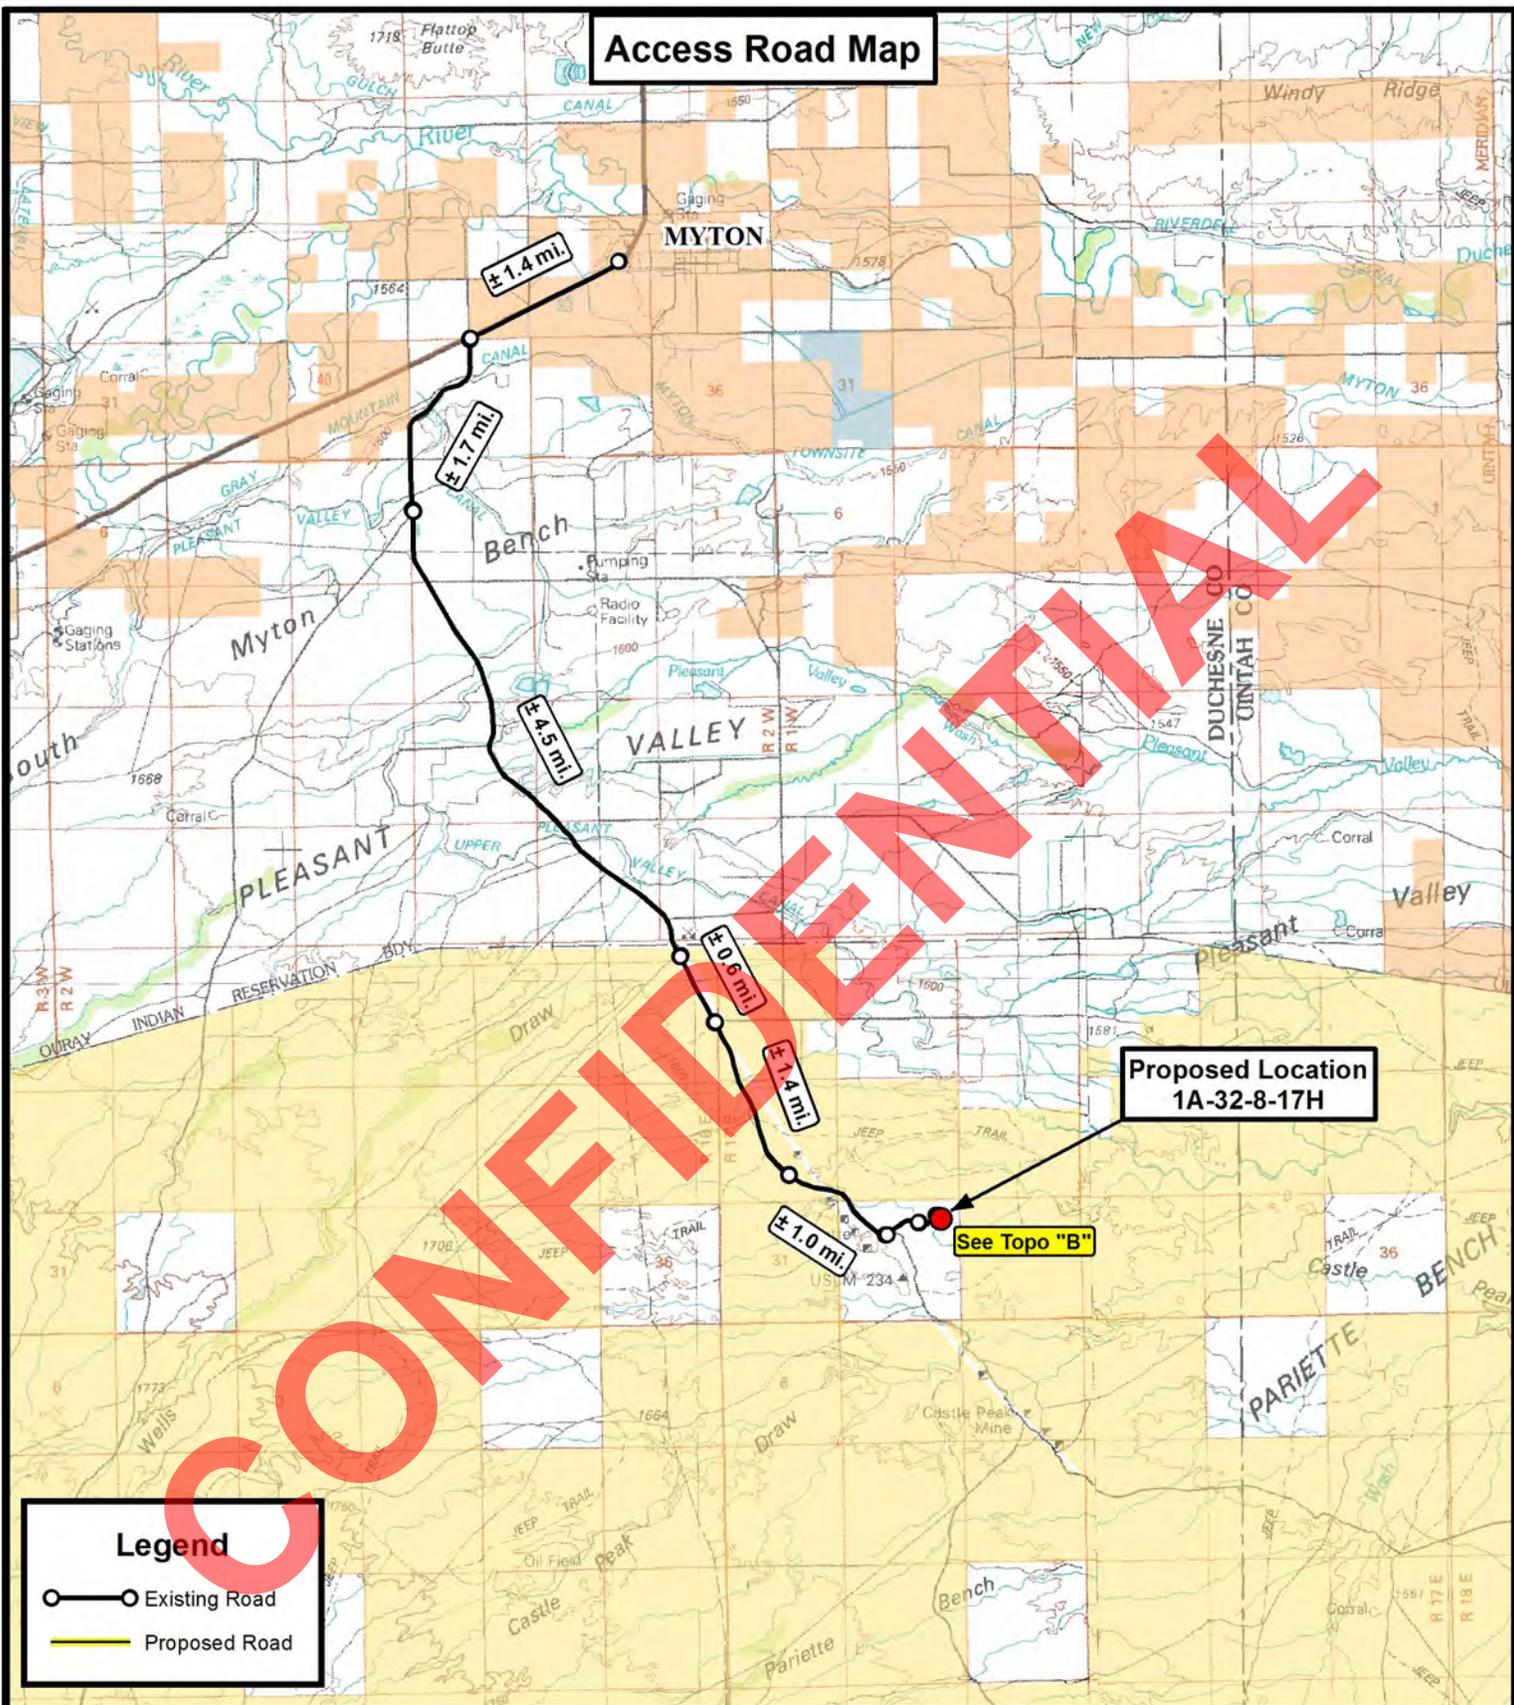

Legend

- Existing Road
- Proposed Road

Tri State Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078
 P: (435) 781-2501
 F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY



1A-32-8-17H
 SEC. 32, T8S, R17E, S.L.B.&M.
 Duchesne County, UT.

DRAWN BY:	D.C.R.	REVISED:	VERSION:
DATE:	07-01-2011		V1
SCALE:	1:100,000		

TOPOGRAPHIC MAP

SHEET
A

Access Road Map

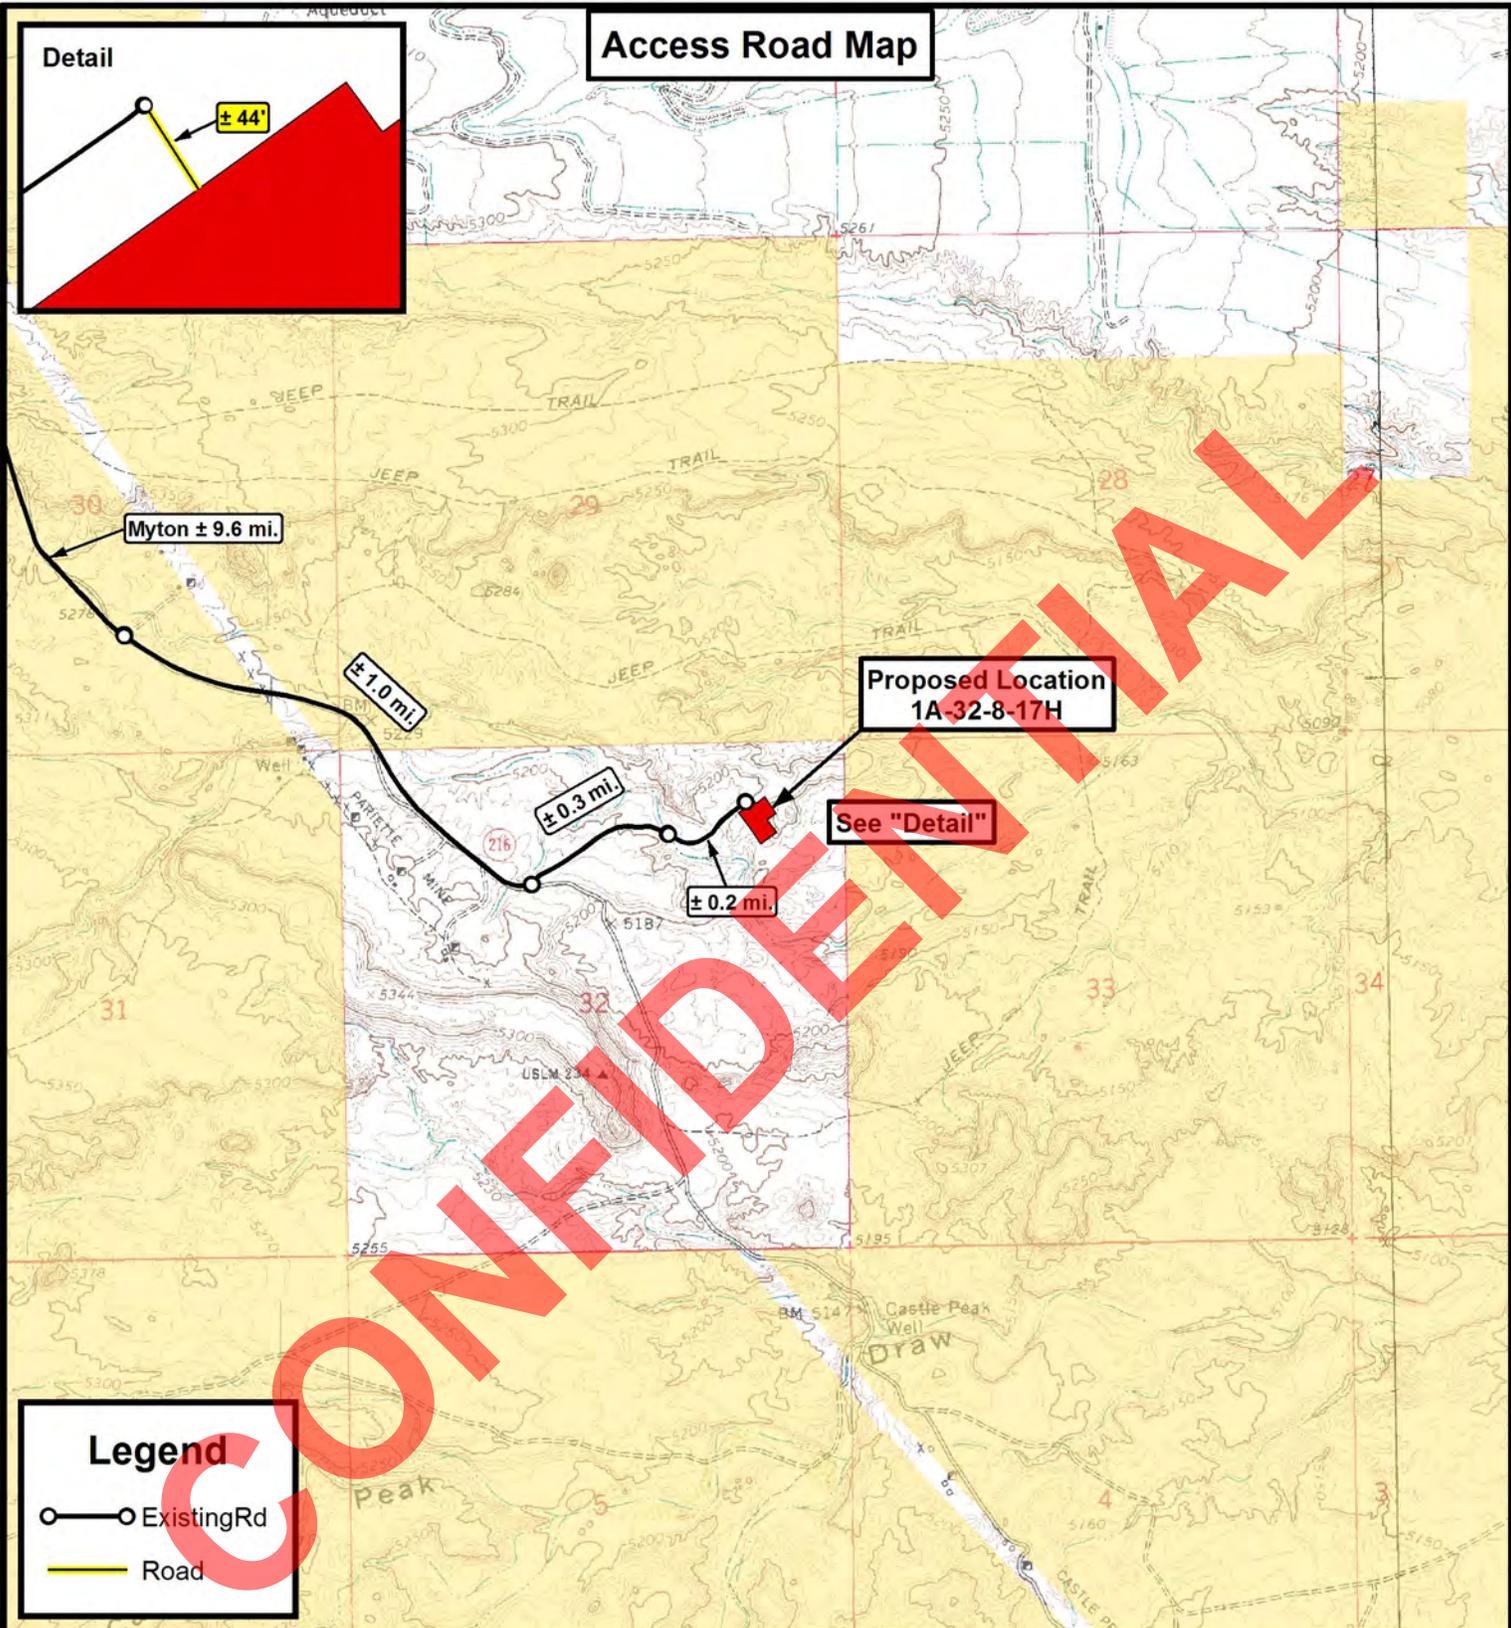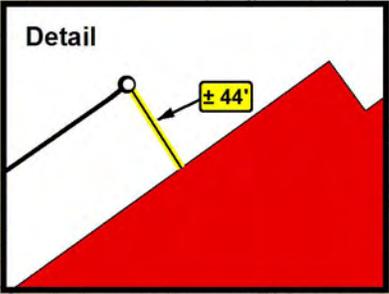

Legend

- Existing Rd
- Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY


1A-32-8-17H
SEC. 32, T8S, R17E, S.L.B.&M.
Duchesne County, UT.

DRAWN BY:	D.C.R.	REVISED:	VERSION:
DATE:	07-01-2011		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET
B

Proposed Pipeline Map

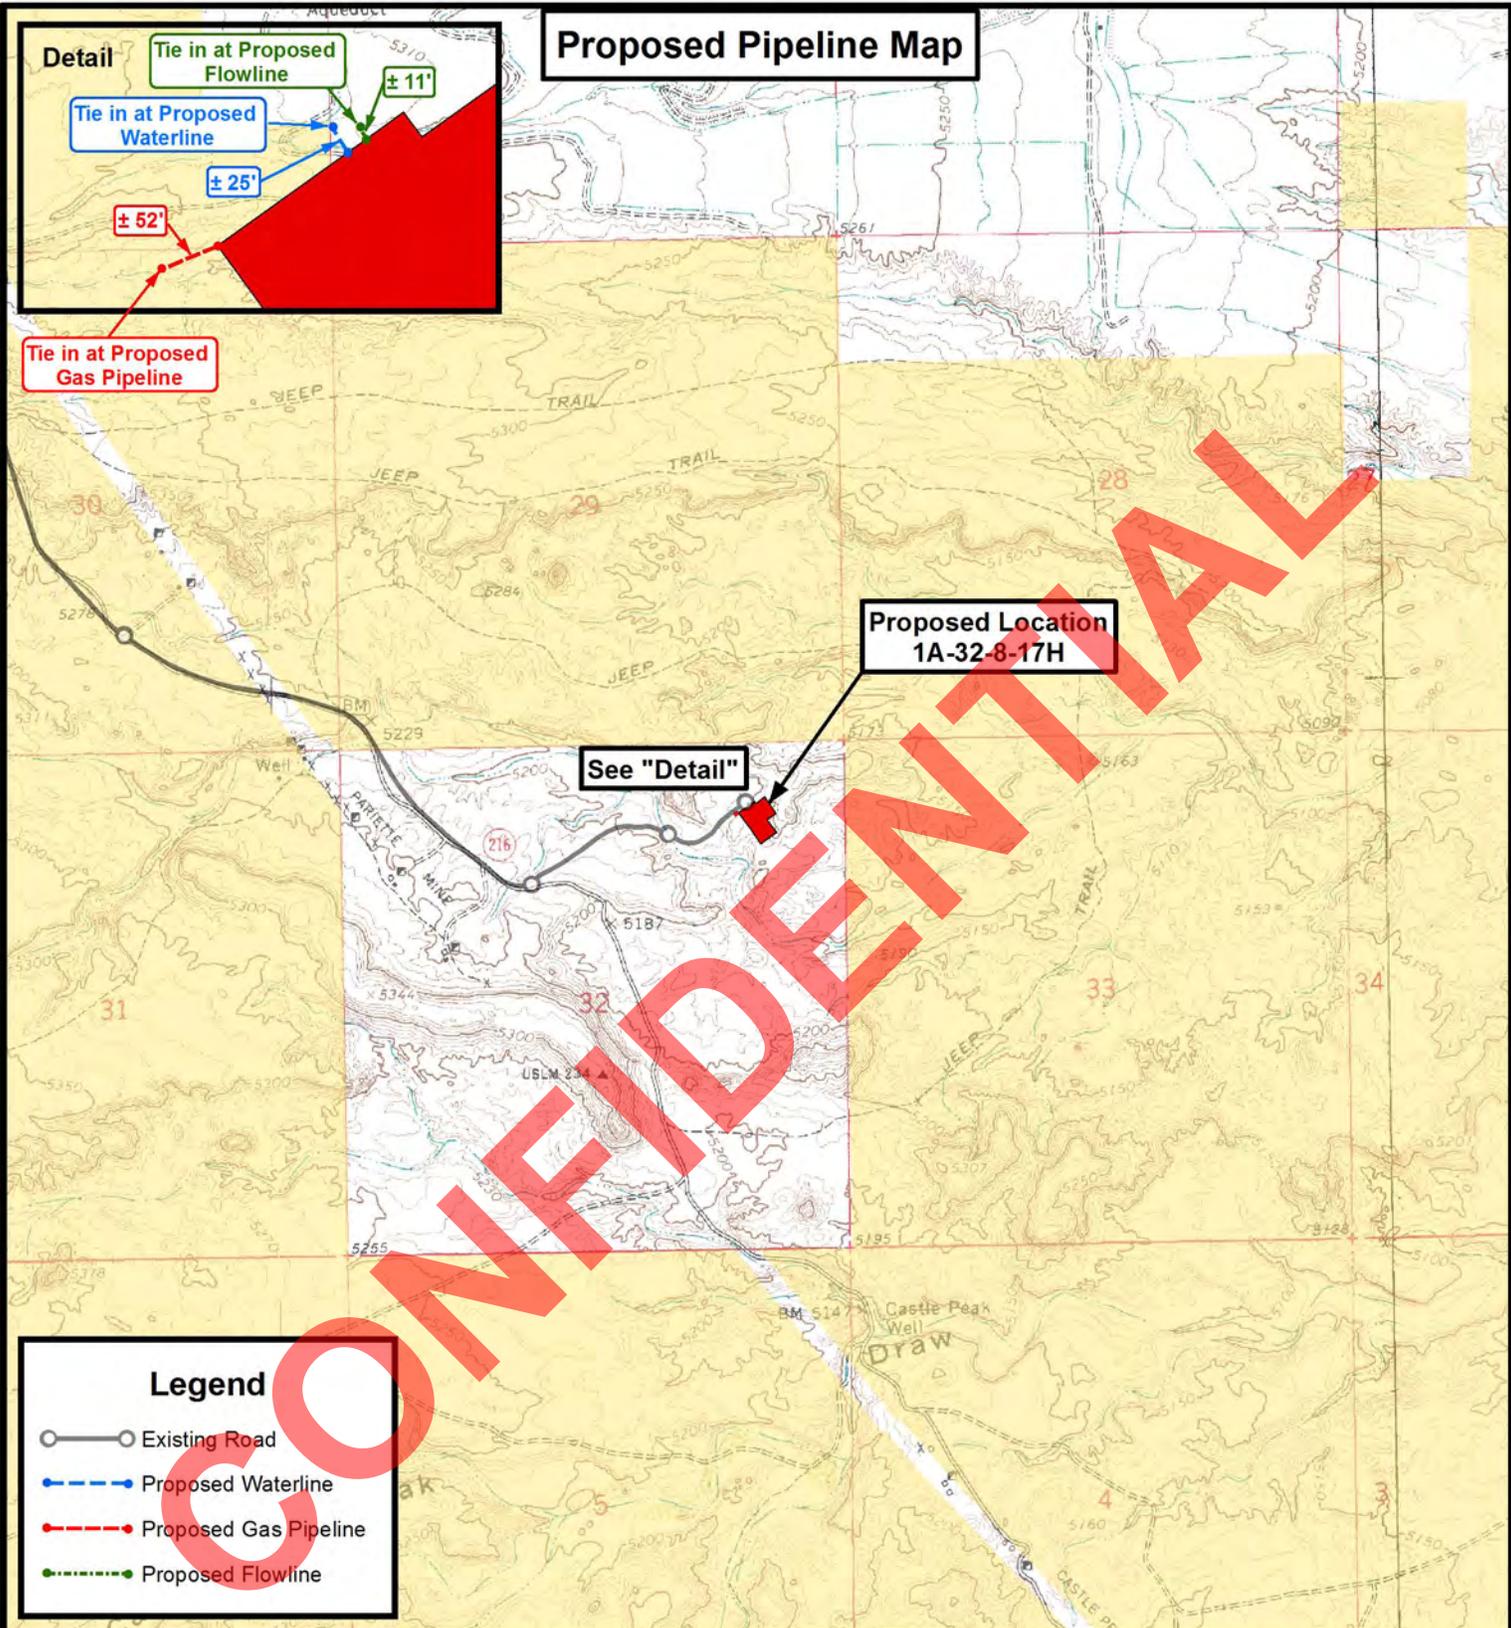

Legend

- Existing Road
- Proposed Waterline
- Proposed Gas Pipeline
- Proposed Flowline

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY


1A-32-8-17H
SEC. 32, T8S, R17E, S.L.B.&M.
Duchesne County, UT.

DRAWN BY:	D.C.R.	REVISED:	VERSION:
DATE:	07-01-2011		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET **C**

Exhibit "B" Map

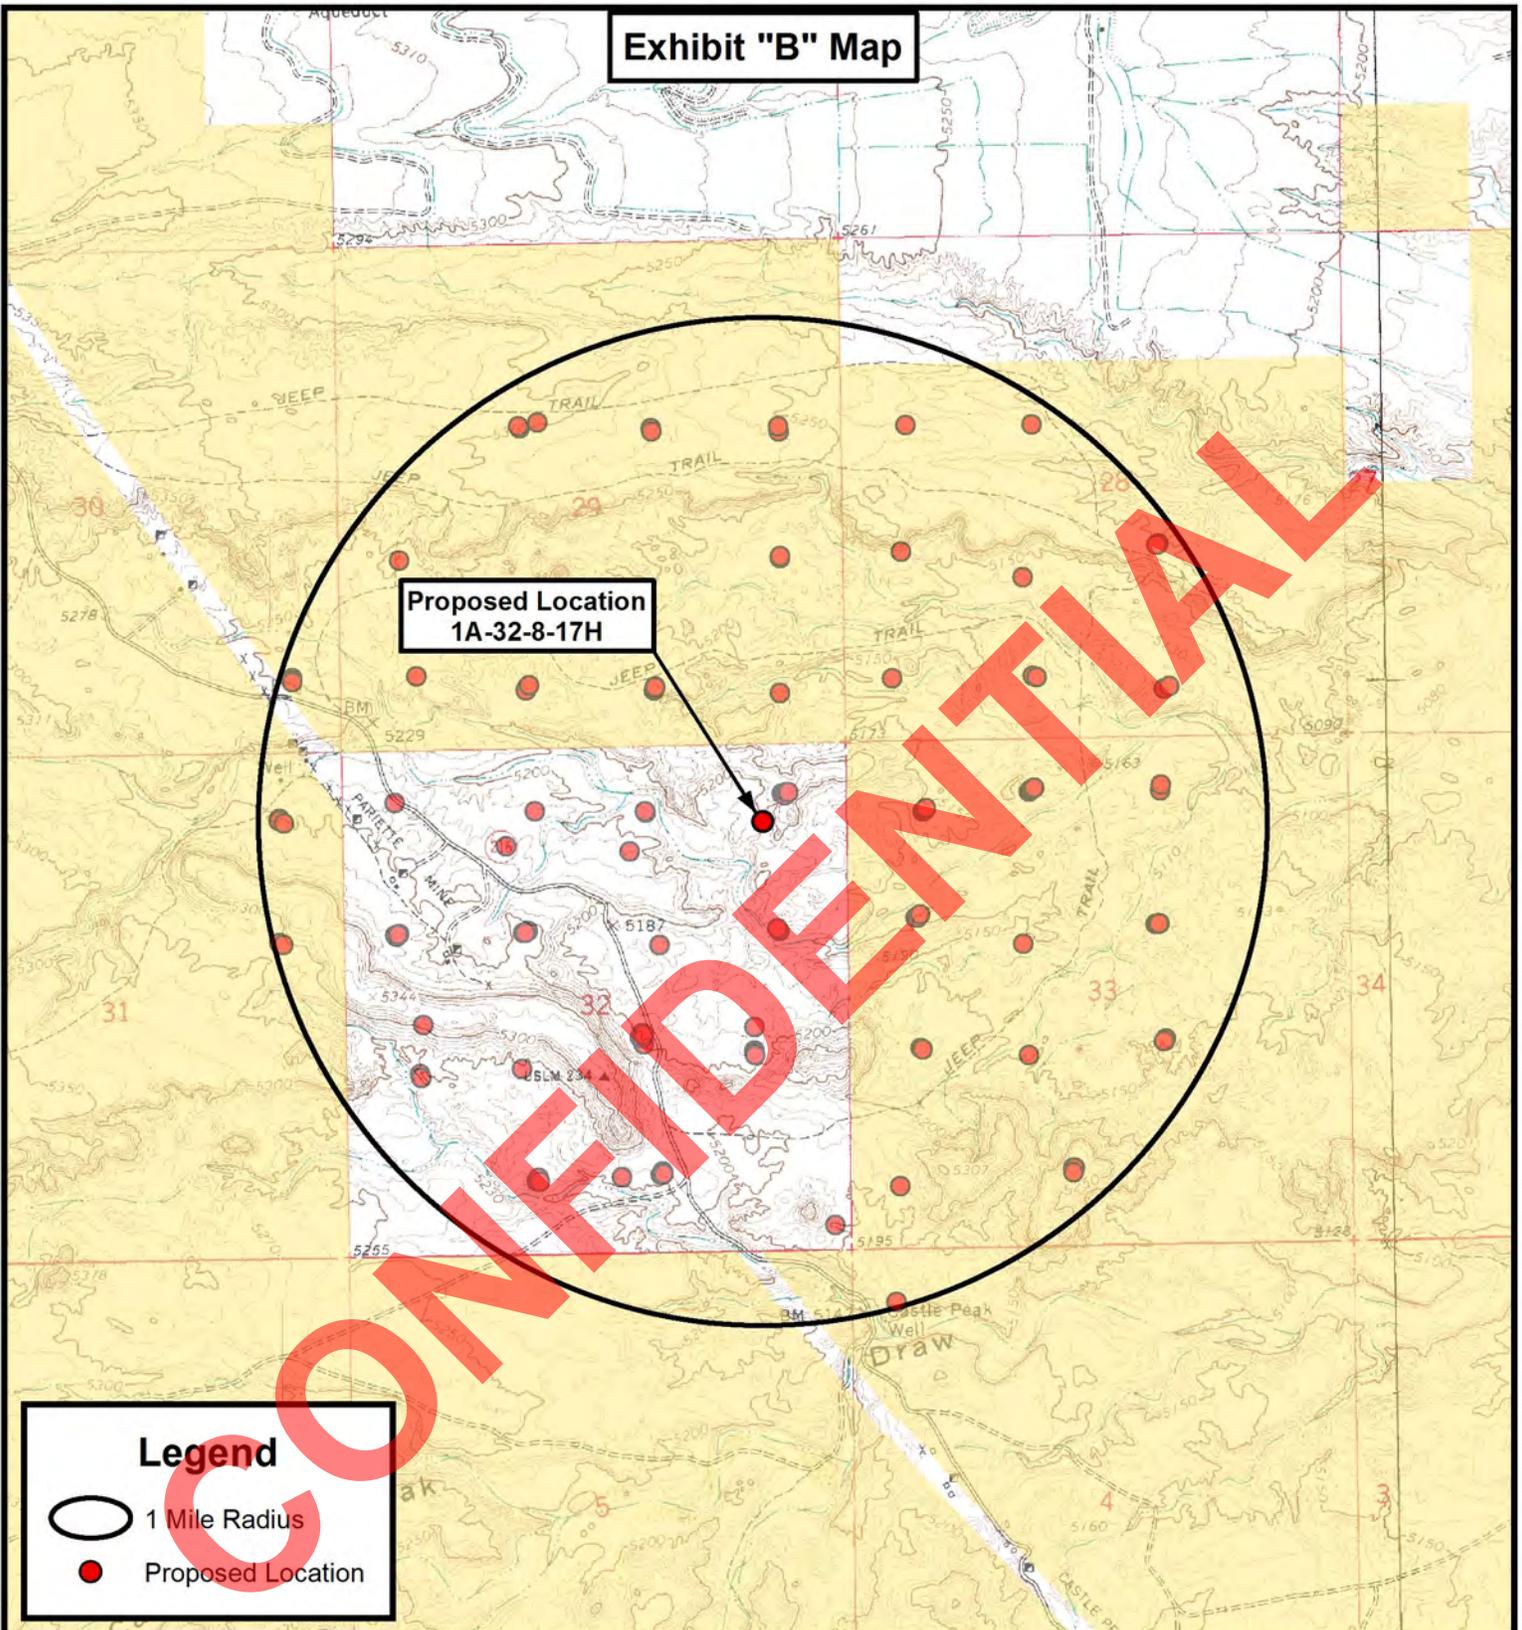

**Proposed Location
1A-32-8-17H**

Legend

- 1 Mile Radius
- Proposed Location

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

**Tri State
Land Surveying, Inc.**
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

**1A-32-8-17H
SEC. 32, T8S, R17E, S.L.B.&M.
Duchesne County, UT.**

DRAWN BY:	D.C.R.	REVISED:	VERSION:
DATE:	07-01-2011		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP



SHEET
D



Newfield Production Company

Project: Uinta Basin
Site: GMBU 1A-32-8-17H
Well: GMBU 1A-32-8-17H
Wellbore: Wellbore #1
Design: Design #1

Azimuths to True North
 Magnetic North: 11.25°
 Magnetic Field
 Strength: 52313.4snT
 Dip Angle: 65.84°
 Date: 9/6/2011
 Model: IGRF200510

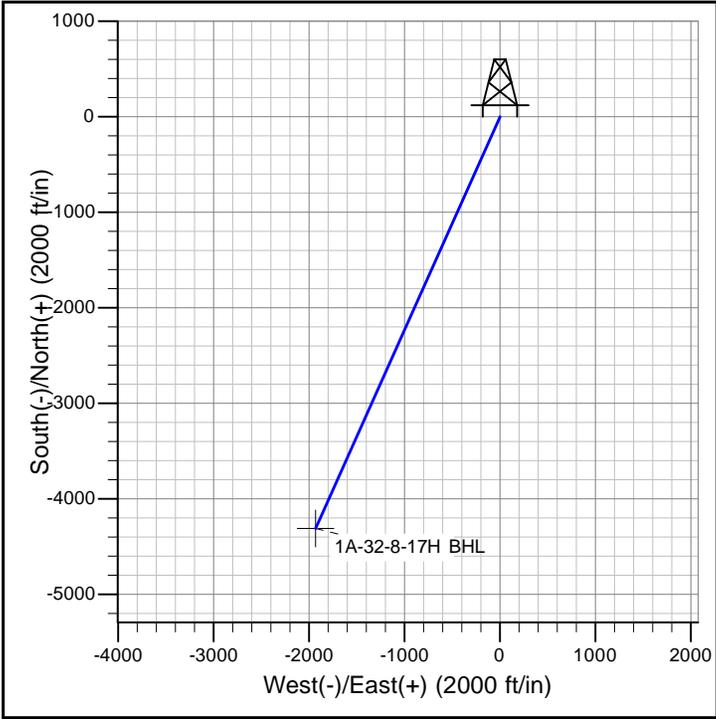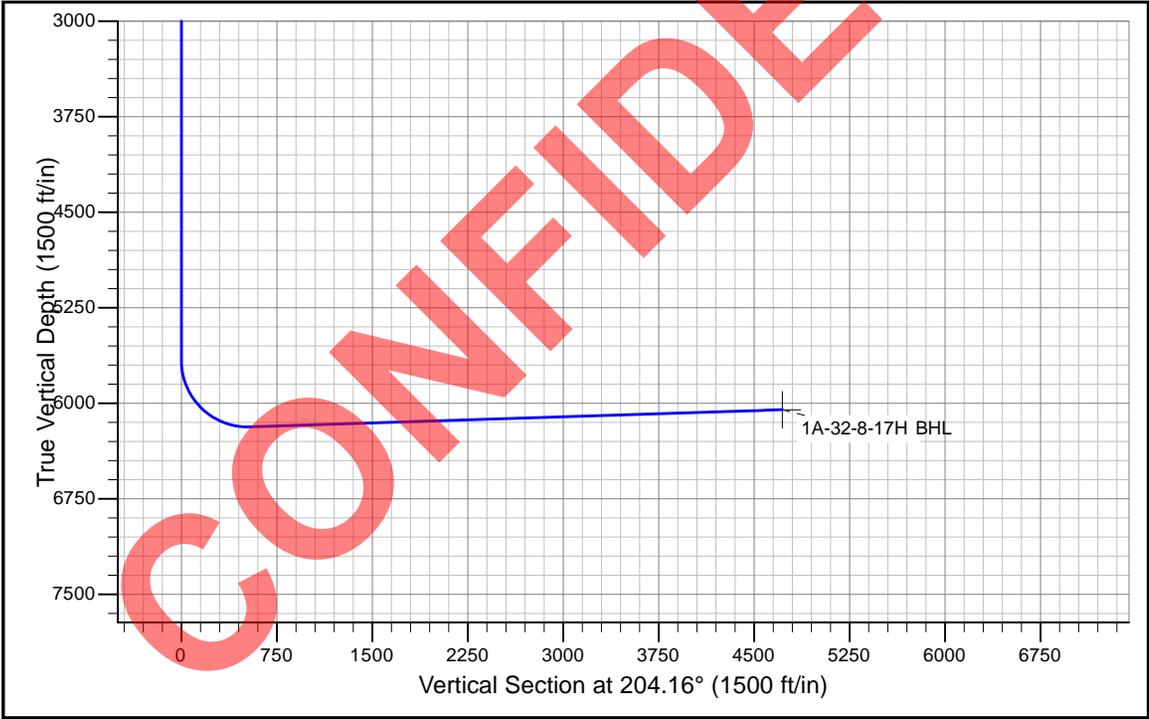

SECTION DETAILS										
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	5664.9	0.00	0.00	5664.9	0.0	0.0	0.00	0.00	0.0	
3	6499.8	91.84	204.16	6185.5	-490.5	-220.0	11.00	204.16	537.6	
4	687.3	91.84	204.16	6051.0	-4309.4	-1932.9	0.00	0.00	4723.0	1A-32-8-17H BHL

PROJECT DETAILS: Uinta Basin
Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: Utah Central Zone
System Datum: Mean Sea Level

Newfield Production Company

Uinta Basin

GMBU 1A-32-8-17H

GMBU 1A-32-8-17H

Wellbore #1

Plan: Design #1

Standard Planning Report

06 September, 2011

CONFIDENTIAL

Newfield Exploration
Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Site GMBU 1A-32-8-17H
Company:	Newfield Production Company	TVD Reference:	RKB @ 5205.0ft
Project:	Uinta Basin	MD Reference:	RKB @ 5205.0ft
Site:	GMBU 1A-32-8-17H	North Reference:	True
Well:	GMBU 1A-32-8-17H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	Uinta Basin		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		

Site	GMBU 1A-32-8-17H				
Site Position:		Northing:	2,194,895.15 m	Latitude:	40° 4' 46.160 N
From:	Lat/Long	Easting:	625,873.02 m	Longitude:	110° 1' 26.600 W
Position Uncertainty:	0.0 ft	Slot Radius:	0.000 in	Grid Convergence:	0.95 °

Well	GMBU 1A-32-8-17H					
Well Position	+N-S	0.0 ft	Northing:	2,194,895.15 m	Latitude:	40° 4' 46.160 N
	+E-W	0.0 ft	Easting:	625,873.02 m	Longitude:	110° 1' 26.600 W
Position Uncertainty		0.0 ft	Wellhead Elevation:		Ground Level:	5,193.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	9/6/2011	11.25	65.84	52,313

Design	Design #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N-S (ft)	+E-W (ft)	Direction (°)
	0.0	0.0	0.0	204.16

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N-S (ft)	+E-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
5,664.9	0.00	0.00	5,664.9	0.0	0.0	0.00	0.00	0.00	0.00	
6,499.8	91.84	204.16	6,185.5	-490.5	-220.0	11.00	11.00	0.00	204.16	
10,687.3	91.84	204.16	6,051.0	-4,309.4	-1,932.9	0.00	0.00	0.00	0.00	1A-32-8-17H BHL

Newfield Exploration
 Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Site GMBU 1A-32-8-17H
Company:	Newfield Production Company	TVD Reference:	RKB @ 5205.0ft
Project:	Uinta Basin	MD Reference:	RKB @ 5205.0ft
Site:	GMBU 1A-32-8-17H	North Reference:	True
Well:	GMBU 1A-32-8-17H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00	
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00	
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00	
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00	
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00	
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00	
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00	
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00	
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00	
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00	
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00	
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00	
2,300.0	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00	
2,400.0	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00	
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00	
2,600.0	0.00	0.00	2,600.0	0.0	0.0	0.0	0.00	0.00	0.00	
2,700.0	0.00	0.00	2,700.0	0.0	0.0	0.0	0.00	0.00	0.00	
2,800.0	0.00	0.00	2,800.0	0.0	0.0	0.0	0.00	0.00	0.00	
2,900.0	0.00	0.00	2,900.0	0.0	0.0	0.0	0.00	0.00	0.00	
3,000.0	0.00	0.00	3,000.0	0.0	0.0	0.0	0.00	0.00	0.00	
3,100.0	0.00	0.00	3,100.0	0.0	0.0	0.0	0.00	0.00	0.00	
3,200.0	0.00	0.00	3,200.0	0.0	0.0	0.0	0.00	0.00	0.00	
3,300.0	0.00	0.00	3,300.0	0.0	0.0	0.0	0.00	0.00	0.00	
3,400.0	0.00	0.00	3,400.0	0.0	0.0	0.0	0.00	0.00	0.00	
3,500.0	0.00	0.00	3,500.0	0.0	0.0	0.0	0.00	0.00	0.00	
3,600.0	0.00	0.00	3,600.0	0.0	0.0	0.0	0.00	0.00	0.00	
3,700.0	0.00	0.00	3,700.0	0.0	0.0	0.0	0.00	0.00	0.00	
3,800.0	0.00	0.00	3,800.0	0.0	0.0	0.0	0.00	0.00	0.00	
3,900.0	0.00	0.00	3,900.0	0.0	0.0	0.0	0.00	0.00	0.00	
4,000.0	0.00	0.00	4,000.0	0.0	0.0	0.0	0.00	0.00	0.00	
4,100.0	0.00	0.00	4,100.0	0.0	0.0	0.0	0.00	0.00	0.00	
4,200.0	0.00	0.00	4,200.0	0.0	0.0	0.0	0.00	0.00	0.00	
4,300.0	0.00	0.00	4,300.0	0.0	0.0	0.0	0.00	0.00	0.00	
4,400.0	0.00	0.00	4,400.0	0.0	0.0	0.0	0.00	0.00	0.00	
4,500.0	0.00	0.00	4,500.0	0.0	0.0	0.0	0.00	0.00	0.00	
4,600.0	0.00	0.00	4,600.0	0.0	0.0	0.0	0.00	0.00	0.00	
4,700.0	0.00	0.00	4,700.0	0.0	0.0	0.0	0.00	0.00	0.00	
4,800.0	0.00	0.00	4,800.0	0.0	0.0	0.0	0.00	0.00	0.00	
4,900.0	0.00	0.00	4,900.0	0.0	0.0	0.0	0.00	0.00	0.00	
5,000.0	0.00	0.00	5,000.0	0.0	0.0	0.0	0.00	0.00	0.00	
5,100.0	0.00	0.00	5,100.0	0.0	0.0	0.0	0.00	0.00	0.00	
5,200.0	0.00	0.00	5,200.0	0.0	0.0	0.0	0.00	0.00	0.00	
5,300.0	0.00	0.00	5,300.0	0.0	0.0	0.0	0.00	0.00	0.00	

Newfield Exploration

Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Site GMBU 1A-32-8-17H
Company:	Newfield Production Company	TVD Reference:	RKB @ 5205.0ft
Project:	Uinta Basin	MD Reference:	RKB @ 5205.0ft
Site:	GMBU 1A-32-8-17H	North Reference:	True
Well:	GMBU 1A-32-8-17H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
5,400.0	0.00	0.00	5,400.0	0.0	0.0	0.0	0.00	0.00	0.00	
5,500.0	0.00	0.00	5,500.0	0.0	0.0	0.0	0.00	0.00	0.00	
5,600.0	0.00	0.00	5,600.0	0.0	0.0	0.0	0.00	0.00	0.00	
5,664.9	0.00	0.00	5,664.9	0.0	0.0	0.0	0.00	0.00	0.00	
5,700.0	3.87	204.16	5,700.0	-1.1	-0.5	1.2	11.00	11.00	0.00	
5,800.0	14.87	204.16	5,798.5	-15.9	-7.1	17.4	11.00	11.00	0.00	
5,900.0	25.87	204.16	5,892.1	-47.6	-21.4	52.2	11.00	11.00	0.00	
6,000.0	36.87	204.16	5,977.3	-95.0	-42.6	104.2	11.00	11.00	0.00	
6,100.0	47.87	204.16	6,051.1	-156.4	-70.2	171.4	11.00	11.00	0.00	
6,200.0	58.87	204.16	6,110.7	-229.5	-103.0	251.6	11.00	11.00	0.00	
6,300.0	69.87	204.16	6,153.9	-311.7	-139.8	341.6	11.00	11.00	0.00	
6,400.0	80.87	204.16	6,179.1	-399.8	-179.3	438.2	11.00	11.00	0.00	
6,499.8	91.84	204.16	6,185.5	-490.5	-220.0	537.6	11.00	11.00	0.00	
6,500.0	91.84	204.16	6,185.4	-490.7	-220.1	537.8	0.00	0.00	0.00	
6,600.0	91.84	204.16	6,182.2	-581.9	-261.0	637.8	0.00	0.00	0.00	
6,700.0	91.84	204.16	6,179.0	-673.1	-301.9	737.7	0.00	0.00	0.00	
6,800.0	91.84	204.16	6,175.8	-764.3	-342.8	837.7	0.00	0.00	0.00	
6,900.0	91.84	204.16	6,172.6	-855.5	-383.7	937.6	0.00	0.00	0.00	
7,000.0	91.84	204.16	6,169.4	-946.7	-424.6	1,037.6	0.00	0.00	0.00	
7,100.0	91.84	204.16	6,166.2	-1,037.9	-465.5	1,137.5	0.00	0.00	0.00	
7,200.0	91.84	204.16	6,163.0	-1,129.1	-506.4	1,237.5	0.00	0.00	0.00	
7,300.0	91.84	204.16	6,159.8	-1,220.3	-547.3	1,337.4	0.00	0.00	0.00	
7,400.0	91.84	204.16	6,156.6	-1,311.5	-588.2	1,437.4	0.00	0.00	0.00	
7,500.0	91.84	204.16	6,153.3	-1,402.7	-629.2	1,537.3	0.00	0.00	0.00	
7,600.0	91.84	204.16	6,150.1	-1,493.9	-670.1	1,637.3	0.00	0.00	0.00	
7,700.0	91.84	204.16	6,146.9	-1,585.1	-711.0	1,737.2	0.00	0.00	0.00	
7,800.0	91.84	204.16	6,143.7	-1,676.3	-751.9	1,837.2	0.00	0.00	0.00	
7,900.0	91.84	204.16	6,140.5	-1,767.5	-792.8	1,937.1	0.00	0.00	0.00	
8,000.0	91.84	204.16	6,137.3	-1,858.7	-833.7	2,037.1	0.00	0.00	0.00	
8,100.0	91.84	204.16	6,134.1	-1,949.8	-874.6	2,137.0	0.00	0.00	0.00	
8,200.0	91.84	204.16	6,130.9	-2,041.0	-915.5	2,237.0	0.00	0.00	0.00	
8,300.0	91.84	204.16	6,127.7	-2,132.2	-956.4	2,336.9	0.00	0.00	0.00	
8,400.0	91.84	204.16	6,124.4	-2,223.4	-997.3	2,436.9	0.00	0.00	0.00	
8,500.0	91.84	204.16	6,121.2	-2,314.6	-1,038.2	2,536.8	0.00	0.00	0.00	
8,600.0	91.84	204.16	6,118.0	-2,405.8	-1,079.1	2,636.7	0.00	0.00	0.00	
8,700.0	91.84	204.16	6,114.8	-2,497.0	-1,120.0	2,736.7	0.00	0.00	0.00	
8,800.0	91.84	204.16	6,111.6	-2,588.2	-1,160.9	2,836.6	0.00	0.00	0.00	
8,900.0	91.84	204.16	6,108.4	-2,679.4	-1,201.8	2,936.6	0.00	0.00	0.00	
9,000.0	91.84	204.16	6,105.2	-2,770.6	-1,242.7	3,036.5	0.00	0.00	0.00	
9,100.0	91.84	204.16	6,102.0	-2,861.8	-1,283.6	3,136.5	0.00	0.00	0.00	
9,200.0	91.84	204.16	6,098.8	-2,953.0	-1,324.5	3,236.4	0.00	0.00	0.00	
9,300.0	91.84	204.16	6,095.5	-3,044.2	-1,365.4	3,336.4	0.00	0.00	0.00	
9,400.0	91.84	204.16	6,092.3	-3,135.4	-1,406.3	3,436.3	0.00	0.00	0.00	
9,500.0	91.84	204.16	6,089.1	-3,226.6	-1,447.2	3,536.3	0.00	0.00	0.00	
9,600.0	91.84	204.16	6,085.9	-3,317.8	-1,488.1	3,636.2	0.00	0.00	0.00	
9,700.0	91.84	204.16	6,082.7	-3,409.0	-1,529.0	3,736.2	0.00	0.00	0.00	
9,800.0	91.84	204.16	6,079.5	-3,500.2	-1,570.0	3,836.1	0.00	0.00	0.00	
9,900.0	91.84	204.16	6,076.3	-3,591.4	-1,610.9	3,936.1	0.00	0.00	0.00	
10,000.0	91.84	204.16	6,073.1	-3,682.6	-1,651.8	4,036.0	0.00	0.00	0.00	
10,100.0	91.84	204.16	6,069.9	-3,773.7	-1,692.7	4,136.0	0.00	0.00	0.00	
10,200.0	91.84	204.16	6,066.6	-3,864.9	-1,733.6	4,235.9	0.00	0.00	0.00	
10,300.0	91.84	204.16	6,063.4	-3,956.1	-1,774.5	4,335.9	0.00	0.00	0.00	
10,400.0	91.84	204.16	6,060.2	-4,047.3	-1,815.4	4,435.8	0.00	0.00	0.00	
10,500.0	91.84	204.16	6,057.0	-4,138.5	-1,856.3	4,535.8	0.00	0.00	0.00	

Newfield Exploration

Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Site GMBU 1A-32-8-17H
Company:	Newfield Production Company	TVD Reference:	RKB @ 5205.0ft
Project:	Uinta Basin	MD Reference:	RKB @ 5205.0ft
Site:	GMBU 1A-32-8-17H	North Reference:	True
Well:	GMBU 1A-32-8-17H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
10,600.0	91.84	204.16	6,053.8	-4,229.7	-1,897.2	4,635.7	0.00	0.00	0.00
10,687.3	91.84	204.16	6,051.0	-4,309.4	-1,932.9	4,723.0	0.00	0.00	0.00

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (m)	Easting (m)	Latitude	Longitude
1A-32-8-17H BHL - hit/miss target - Shape - Point	0.00	0.00	6,051.0	-4,309.4	-1,932.9	2,193,572.11	625,305.62	40° 4' 3.569 N	110° 1' 51.464 W

CONFIDENTIAL

NEWFIELD PRODUCTION COMPANY
GMBU 1A-32-8-17H
SHL: NE/NE SECTION 32, T8S, R17E
BHL: SE/SW SECTION 32, T8S, R17E
DUCHESNE COUNTY, UTAH

THIRTEEN POINT SURFACE PROGRAM

1. **EXISTING ROADS**

See attached **Topographic Map "A"**

To reach Newfield Production Company well location site GMBU 1A-32-8-17H located in the NE¼ NE¼ Section 32, T8S, R17E, S.L.B. & M., Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.4 miles ± to the junction of this highway and UT State Hwy 53; proceed southeasterly – 9.2 miles ± to it's junction with an existing road to the northeast; proceed northeasterly – 0.5 miles ± to it's junction with the beginning of the proposed access road to the proposed well location.

The highways mentioned in the foregoing paragraph are bituminous surfaced roads to the point where Highway 216 exists to the South, thereafter the roads are constructed with existing materials and gravel. The highways are maintained by Utah State road crews. All other roads are maintained by County crews.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal.

2. **PLANNED ACCESS ROAD**

The access road is already existing for the proposed 1A-32-8-17H. See attached **Topographic Map "B"**.

There will be no culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

3. **LOCATION OF EXISTING WELLS**

Refer to **EXHIBIT B**.

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck for drilling purposes from the following water sources:

Johnson Water District
Water Right: 43-7478

Neil Moon Pond
Water Right: 43-11787

Maurice Harvey Pond
Water Right: 47-1358

Newfield Collector Well
Water Right: 47-1817 (A30414DVA, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. A 16 mil liner with felt will be required. Newfield requests approval that a flare pit be constructed and utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E) or at State of Utah approved surface disposal facilities.

8. **ANCILLARY FACILITIES:**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT:**

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

10. **PLANS FOR RESTORATION OF SURFACE:**

a) **Producing Location**

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

b) **Dry Hole Abandoned Location**

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP:** State of Utah.

12. **OTHER ADDITIONAL INFORMATION:**

- a) Newfield Production Company is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, Newfield is to immediately stop work that might further disturb such materials and contact the Authorized Officer.
- b) Newfield Production will control noxious weeds along rights-of-way for roads, pipelines, well sites or other applicable facilities. On State administered land it is required that a Pesticide Use Proposal shall be submitted and given approval prior to the application of herbicides or other possible hazardous chemicals.
- c) Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on State Lands after the conclusion of drilling operations or at any other time without State authorization. However, if State authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

Water Disposal

After first production, if the production water meets quality guidelines, it will be transported to the Ashley, Monument Butte, Jonah, South Wells Draw and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project. Water not meeting quality criteria, will be disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), Federally approved surface disposal facilities or at a State of Utah approved surface disposal facilities.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the GMBU 1A-32-8-17H, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the GMBU 1A-32-8-17H Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

The State office shall be notified upon site completion prior to moving on the drilling rig.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative

Name: Tim Eaton
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification

Please be advised that Newfield Production Company is considered to be the operator of well #1A-32-8-17H, NE/NE Section 32, T8S, R17E, Duchesne County, Utah and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by Bond #B001834.


I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

9/9/11
Date _____

Mandie Crozier
Regulatory Analyst
Newfield Production Company

CONFIDENTIAL

Typical 2M BOP stack configuration

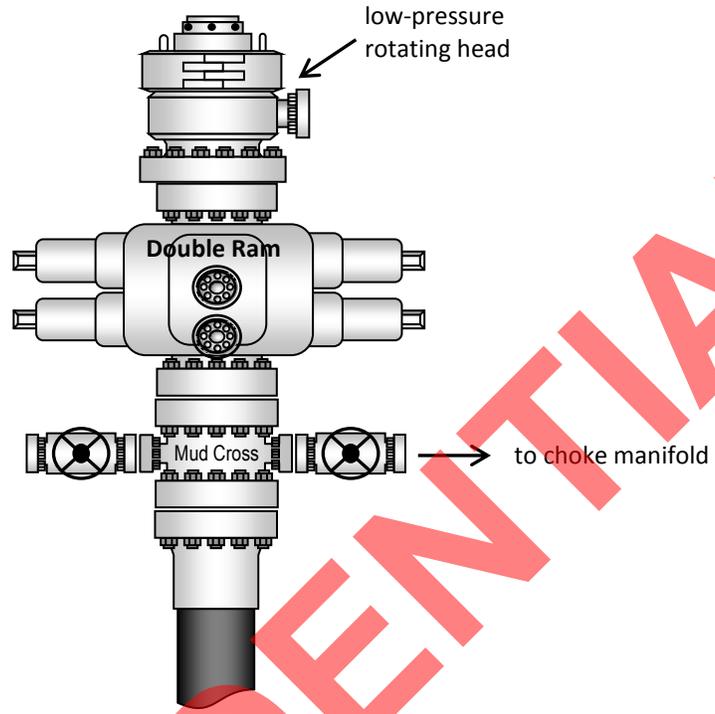


CONFIDENTIAL

NEWFIELD EXPLORATION COMPANY

WELL PAD INTERFERENCE PLAT

1A-32-8-17H (Proposed Well)

Pad Location: NENE Section 32, T8S, R17E, S.L.B.&M.

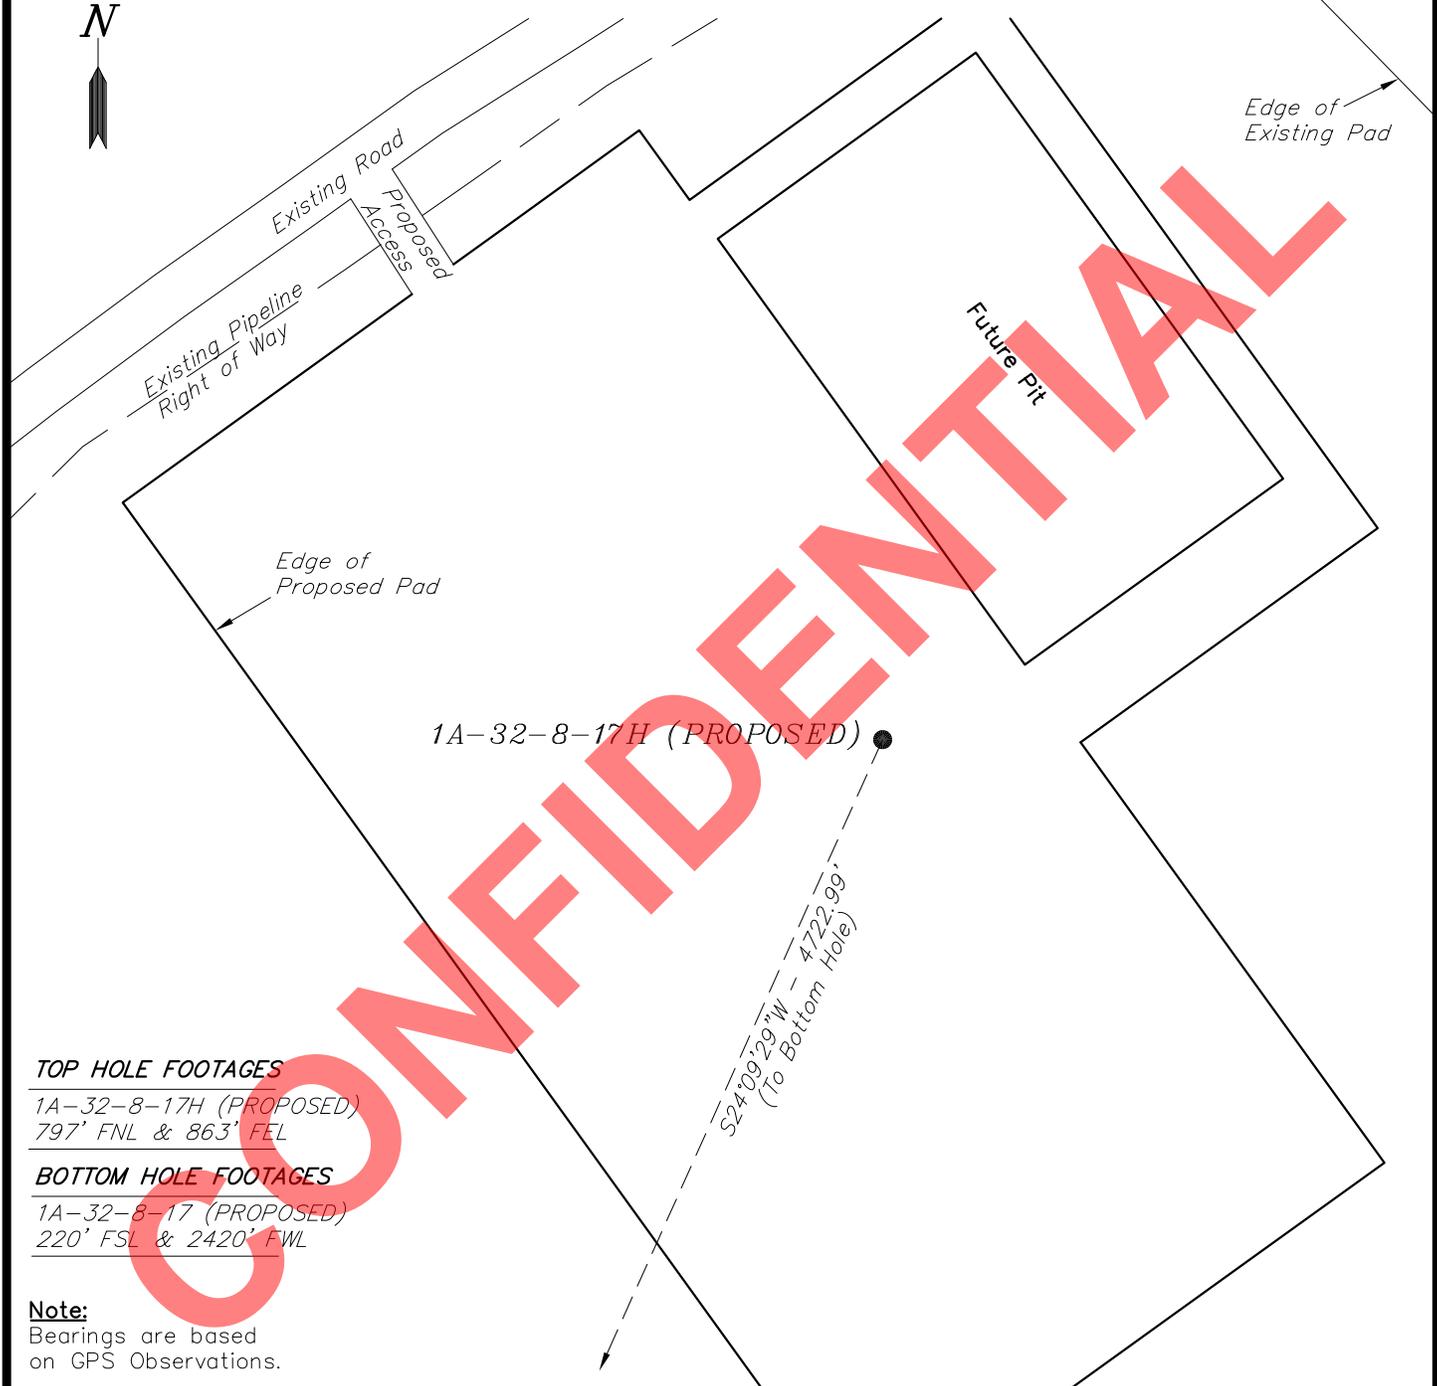

1A-32-8-17H (PROPOSED)

TOP HOLE FOOTAGES

1A-32-8-17H (PROPOSED)
797' FNL & 863' FEL

BOTTOM HOLE FOOTAGES

1A-32-8-17 (PROPOSED)
220' FSL & 2420' FWL

Note:

Bearings are based on GPS Observations.

S24°09'29" W - 4722.99'
(To Bottom Hole)

RELATIVE COORDINATES From Top Hole to Bottom Hole		
WELL	NORTH	EAST
1A-32-8-17H	-4,309'	-1,933'

LATITUDE & LONGITUDE Surface position of Wells (NAD 83)		
WELL	LATITUDE	LONGITUDE
1A-32-8-17H	40° 04' 46.16"	110° 01' 26.60"

SURVEYED BY: S.H.	DATE SURVEYED: 06-15-11	VERSION: V1
DRAWN BY: M.W.	DATE DRAWN: 06-21-11	
SCALE: 1" = 60'	REVISED: F.T.M. 09-14-11	


Tri State (435) 781-2501
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD EXPLORATION COMPANY

LOCATION LAYOUT

1A-32-8-17H

Pad Location: NENE Section 32, T8S, R17E, S.L.B.&M.

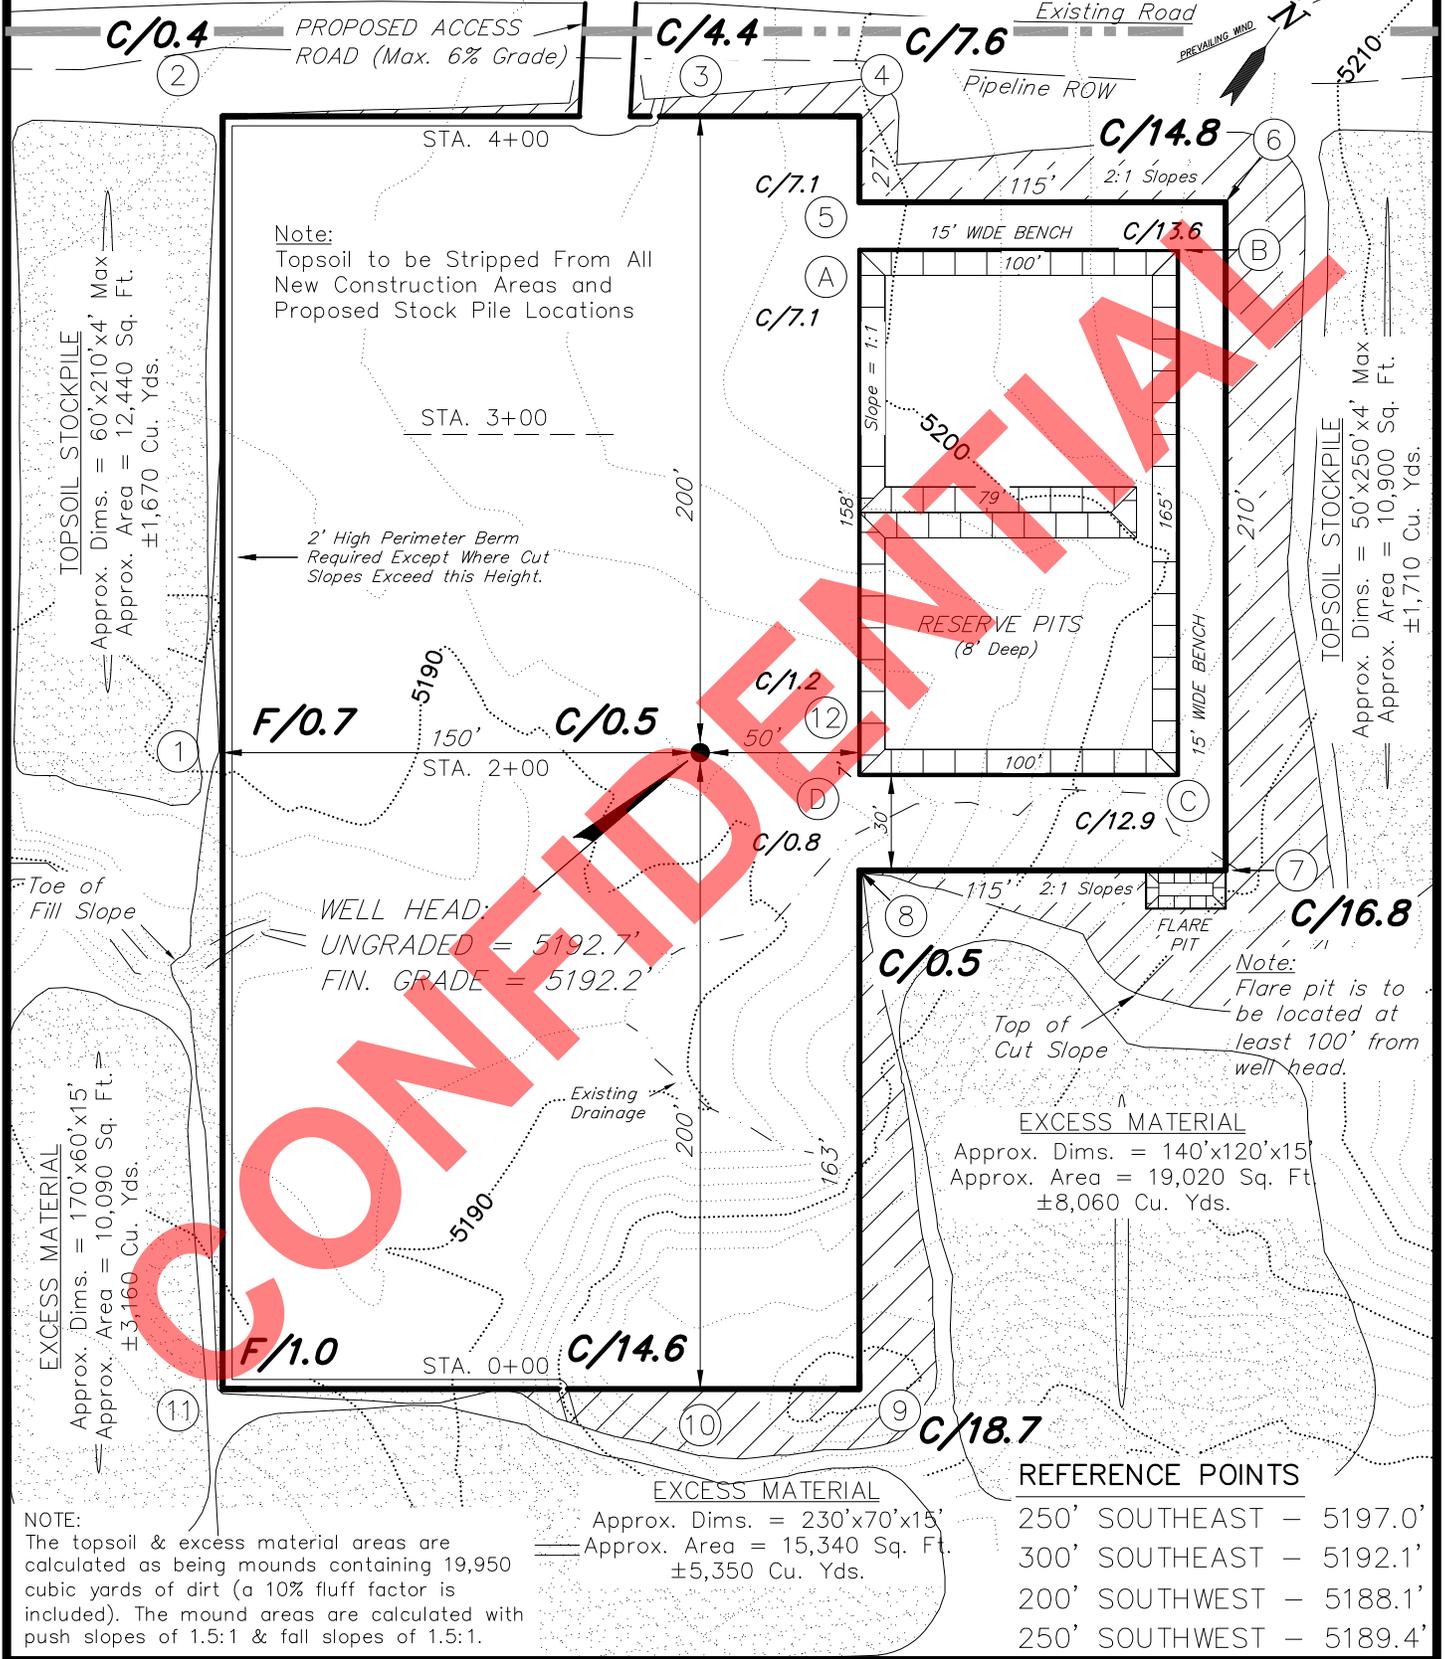

SURVEYED BY: S.H.	DATE SURVEYED: 06-15-11	VERSION:
DRAWN BY: M.W.	DATE DRAWN: 06-21-11	V1
SCALE: 1" = 60'	REVISED: F.T.M. 09-14-11	




Tri State (435) 781-2501
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD EXPLORATION COMPANY

CROSS SECTIONS

1A-32-8-17H

Pad Location: NENE Section 32, T8S, R17E, S.L.B.&M.

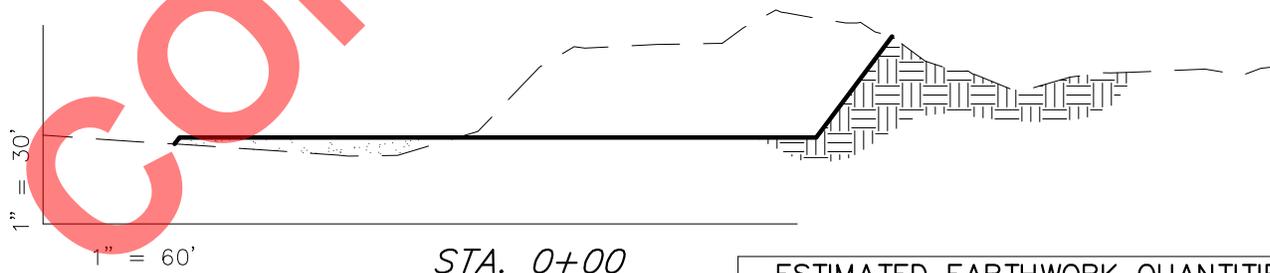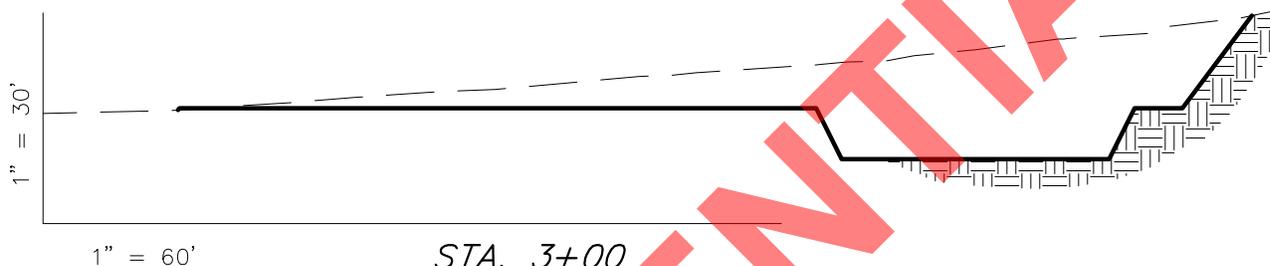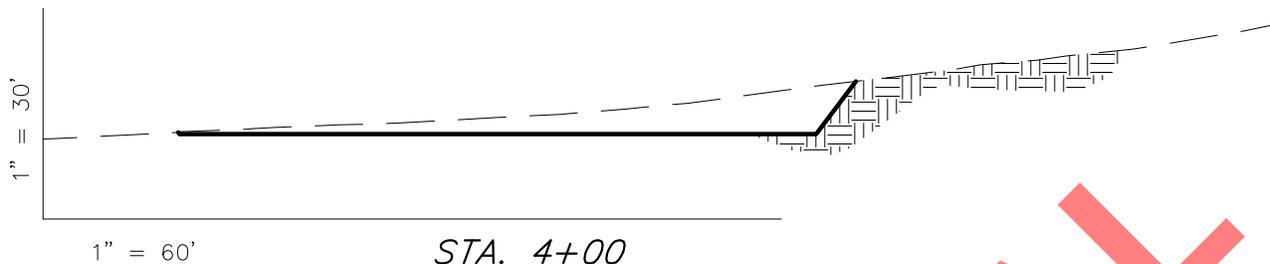

ESTIMATED EARTHWORK QUANTITIES
(No Shrink or swell adjustments have been used)
(Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	16,030	5,070	Topsoil is not included in Pad Cut	10,960
PIT	4,100	0		4,100
TOTALS	20,130	5,070	3,240	15,060

NOTE:
UNLESS OTHERWISE
NOTED ALL CUT/FILL
SLOPES ARE AT 1.5:1

SURVEYED BY: S.H.	DATE SURVEYED: 06-15-11	VERSION:
DRAWN BY: M.W.	DATE DRAWN: 06-21-11	V1
SCALE: 1" = 60'	REVISED: F.T.M. 09-14-11	

Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078


RECEIVED: September 09, 2011

NEWFIELD EXPLORATION COMPANY

TYPICAL RIG LAYOUT

1A-32-8-17H

Pad Location: NENE Section 32, T8S, R17E, S.L.B.&M.

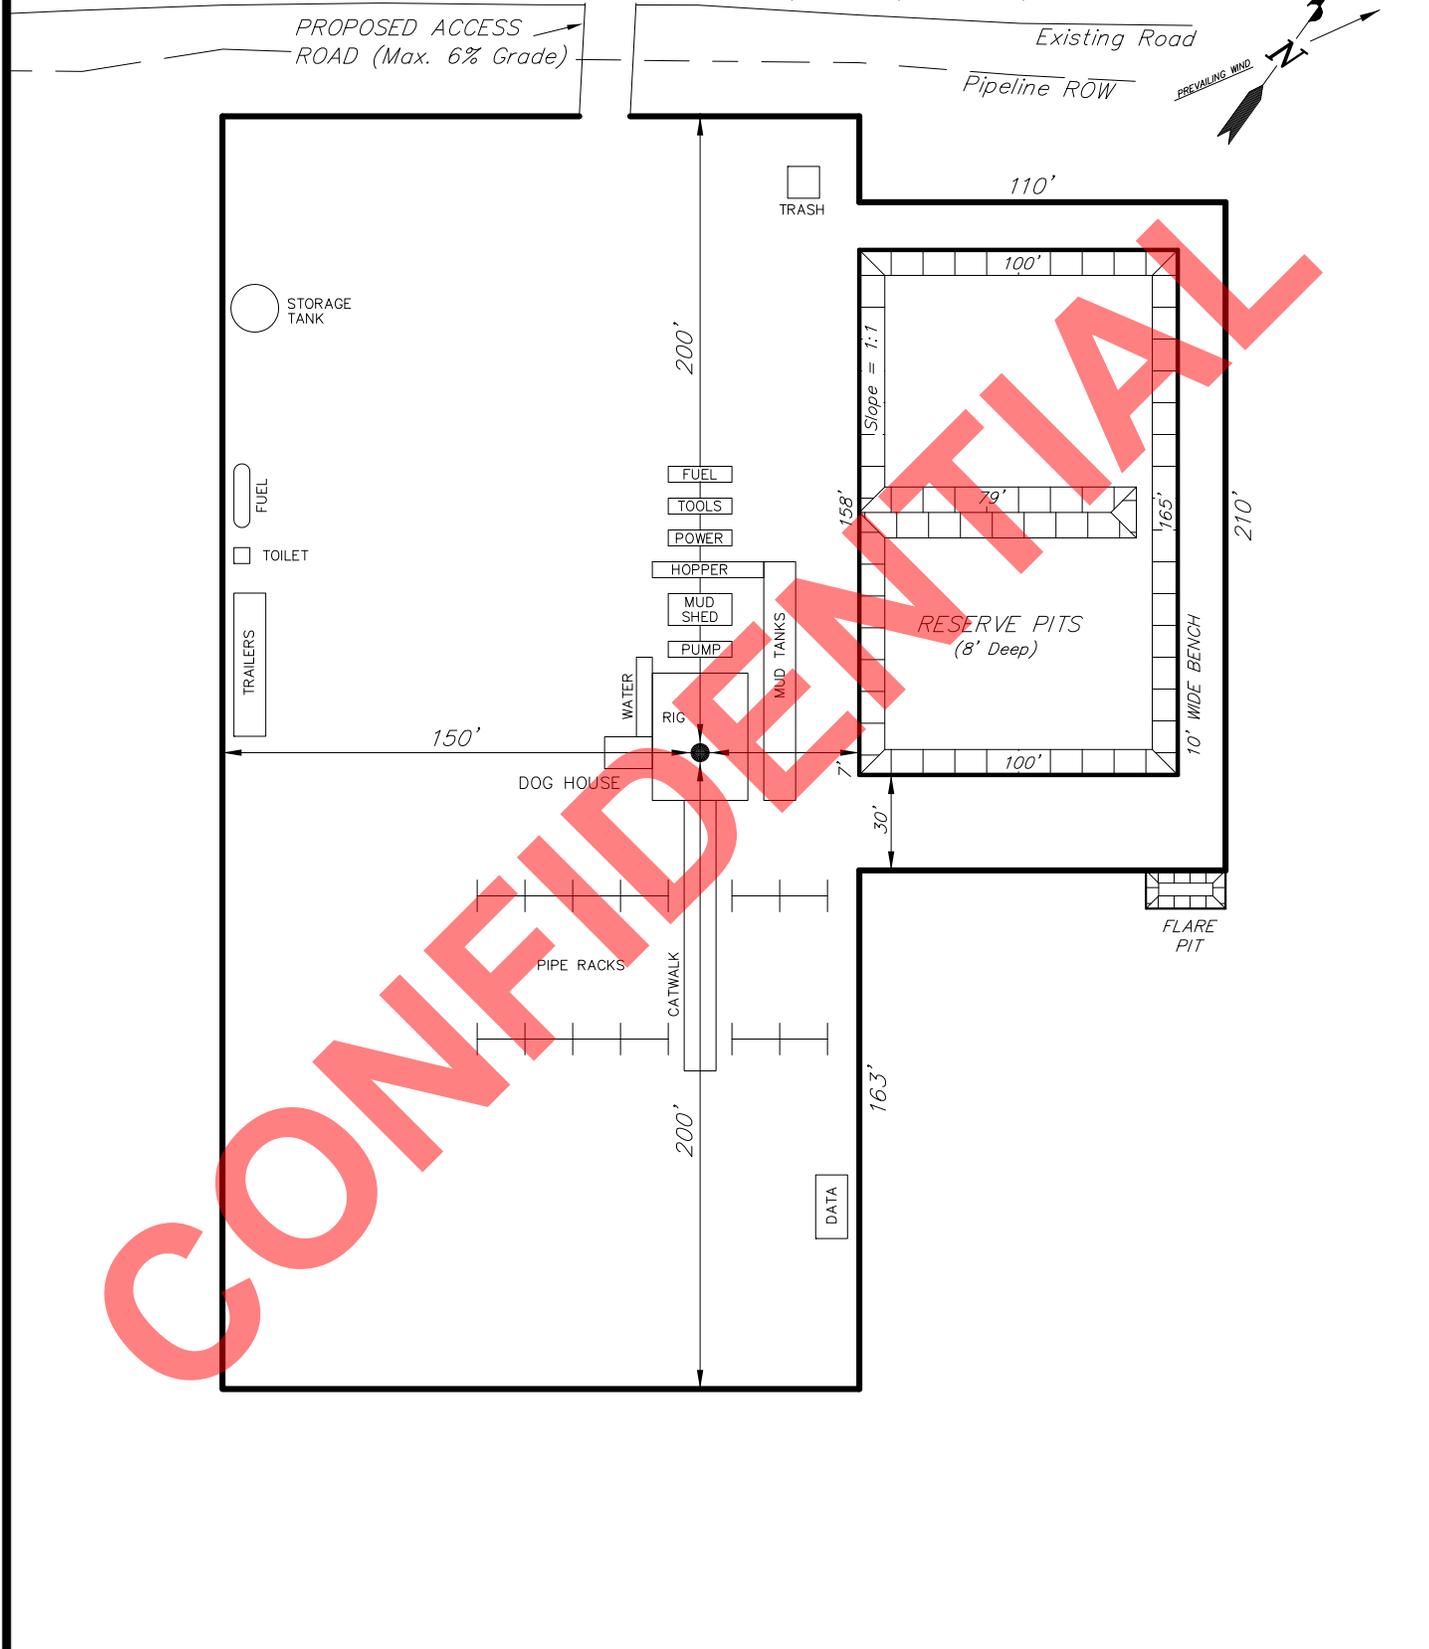


CONFIDENTIAL

SURVEYED BY: S.H.	DATE SURVEYED: 06-15-11	VERSION:
DRAWN BY: M.W.	DATE DRAWN: 06-21-11	V1
SCALE: 1" = 60'	REVISED: F.T.M. 09-14-11	


(435) 781-2501
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078


RECEIVED: September 09, 2011

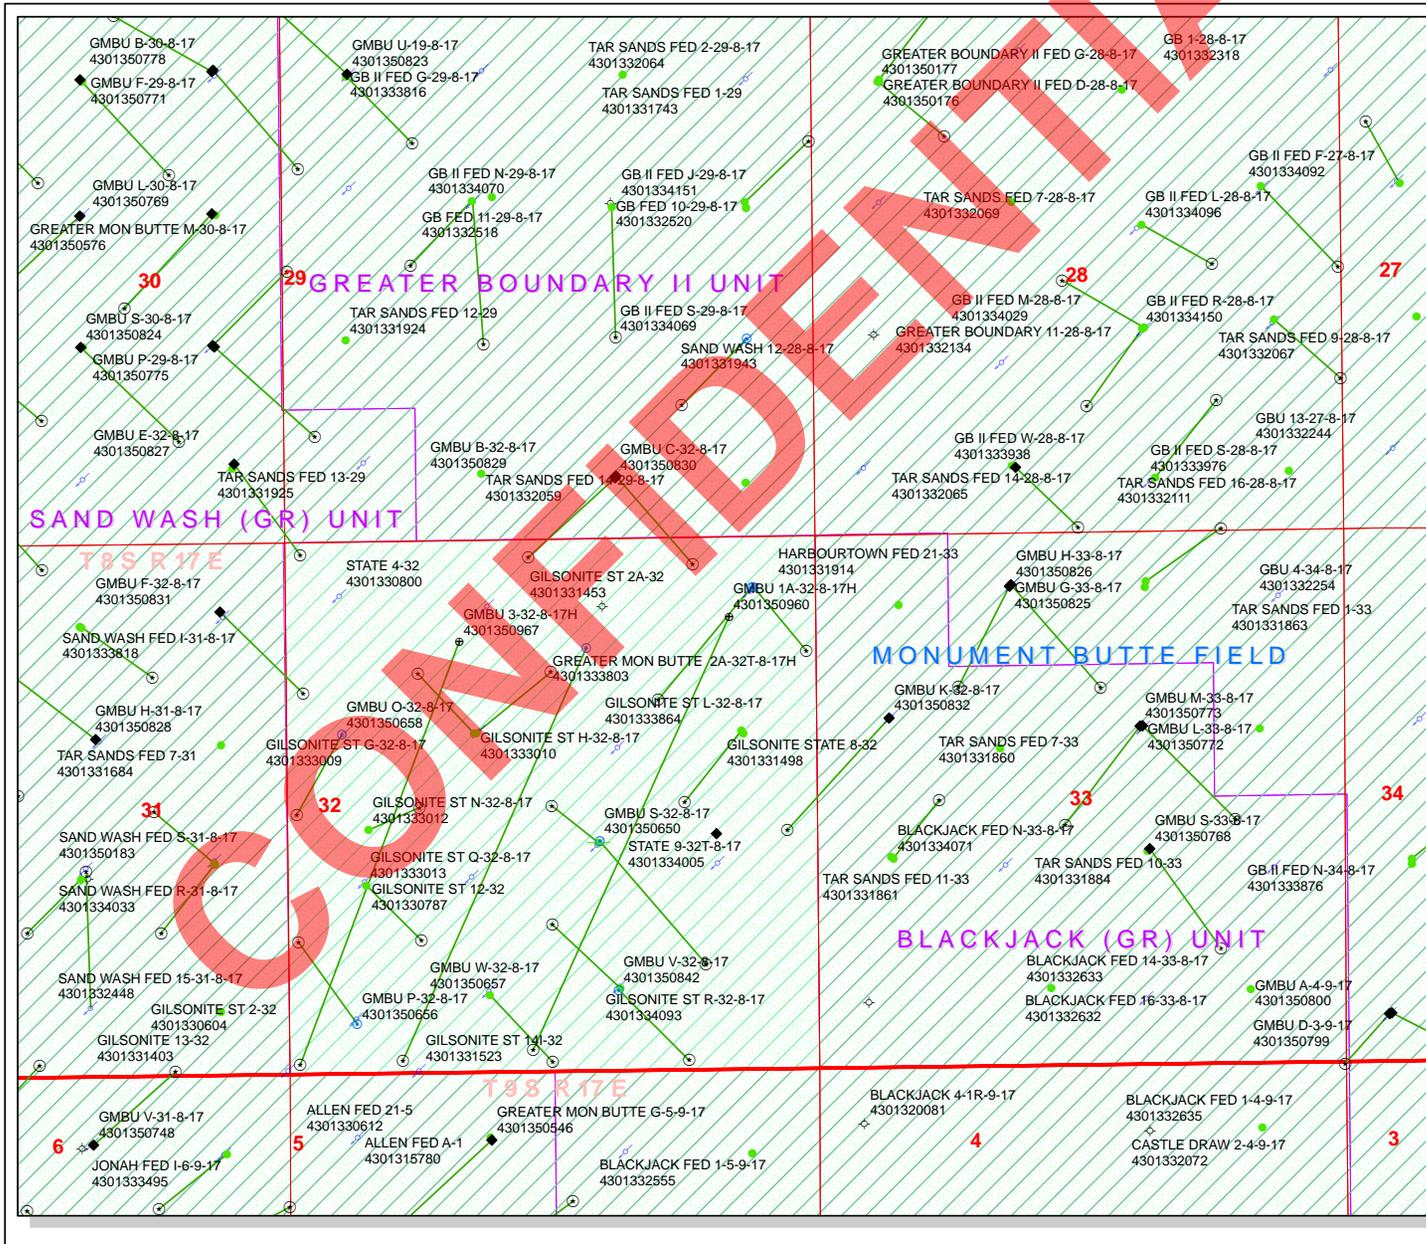

API Number: 4301350960
Well Name: GMBU 1A-32-8-17H
Township T0.8 . Range R1.7 . Section 32
Meridian: SLBM
Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared:
 Map Produced by Diana Mason

Units	Wells Query Status
ACTIVE	APD - Approved Permit
EXPLORATORY	DRL - Spudded (Drilling Commenced)
GAS STORAGE	GIW - Gas Injection
NF PP OIL	GS - Gas Storage
NF SECONDARY	LA - Location Abandoned
PI OIL	LOC - New Location
PP GAS	OPS - Operation Suspended
PP GEOTHERMAL	PA - Plugged Abandoned
PP OIL	PGW - Producing Gas Well
SECONDARY	POW - Producing Oil Well
TERMINATED	RET - Returned APD
Unknown	SGW - Shut-in Gas Well
ABANDONED	SOW - Shut-in Oil Well
ACTIVE	TA - Temp. Abandoned
COMBINED	TW - Test Well
INACTIVE	WDW - Water Disposal
STORAGE	WIW - Water Injection Well
TERMINATED	WSW - Water Supply Well
Sections	
Township	

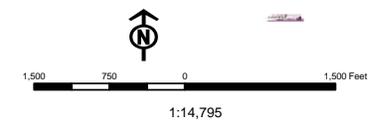

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

September 16, 2011

Memorandum

To: Assistant District Manager Minerals, Vernal District
From: Michael Coulthard, Petroleum Engineer
Subject: 2011 Plan of Development Greater Monument
Butte Unit, Duchesne and Uintah Counties,
Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2011 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

API#	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-50957	GMBU 2-32-8-16H	Sec 32 T08S R16E 0274 FNL 1529 FEL
	Lateral 1	Sec 32 T08S R16E 0090 FSL 1500 FWL
43-013-50958	GMBU 1A-36-8-16H	Sec 36 T08S R16E 0957 FNL 0256 FEL
	Lateral 1	Sec 36 T08S R16E 0160 FSL 2100 FEL
43-013-50959	GMBU 1-16-9-17H	Sec 16 T09S R17E 1037 FNL 0406 FEL
	Lateral 1	Sec 16 T09S R17E 0100 FSL 2600 FEL
43-013-50960	GMBU 1A-32-8-17H	Sec 32 T08S R17E 0797 FNL 0863 FEL
	Lateral 1	Sec 32 T08S R17E 0220 FSL 2420 FWL
43-013-50967	GMBU 3-32-8-17H	Sec 32 T08S R17E 1010 FNL 1735 FWL
	Lateral 1	Sec 32 T08S R17E 0100 FSL 0100 FWL
43-013-50968	GMBU 3-2-9-15H	Sec 02 T09S R15E 1107 FNL 1468 FWL
	Lateral 1	Sec 02 T09S R15E 0100 FSL 0100 FWL
43-013-50970	GMBU B-2-9-15	Sec 02 T09S R15E 0641 FNL 1945 FEL
	BHL	Sec 02 T09S R15E 0080 FNL 1180 FEL

RECEIVED: September 16, 2011

API#	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-50971	GMBU C-2-9-15	Sec 02 T09S R15E 0655 FNL 1961 FEL BHL Sec 02 T09S R15E 0080 FNL 2635 FEL
43-013-50972	GMBU W-16-9-17	Sec 16 T09S R17E 0582 FSL 1940 FEL BHL Sec 16 T09S R17E 0080 FSL 2623 FEL
43-047-52011	GMBU 1-36T-8-17H	Sec 36 T08S R17E 0646 FNL 0957 FEL Lateral 1 Sec 36 T08S R17E 0130 FSL 2435 FWL

This office has no objection to permitting the wells at this time.

Michael L. Coulthard

Digitally signed by Michael L. Coulthard
 DN: cn=Michael L. Coulthard, o=Bureau of Land Management,
 ou=Branch of Minerals, email=Michael_Coulthard@blm.gov,
 c=US
 Date: 2011.09.16 15:48:58 -06'00'

bcc: File - Greater Monument Butte Unit
 Division of Oil Gas and Mining
 Central Files
 Agr. Sec. Chron
 Fluid Chron

MCoulthard:mc:9-16-11

Well Name	NEWFIELD PRODUCTION COMPANY GMBU 1A-32-8-17H 43			
String	SURF	PROD	P2	
Casing Size(")	8.625	5.500	4.500	
Setting Depth (TVD)	300	6185	6051	
Previous Shoe Setting Depth (TVD)	0	300	6185	
Max Mud Weight (ppg)	8.3	9.0	9.0	
BOPE Proposed (psi)	0	2000	2000	
Casing Internal Yield (psi)	2950	9190	10690	
Operators Max Anticipated Pressure (psi)	2602		8.3	

Calculations	SURF String	8.625	"
Max BHP (psi)	.052*Setting Depth*MW=	129	
			BOPE Adequate For Drilling And Setting Casing at Depth?
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=	93	NO <input type="text" value="air or fresh water"/>
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=	63	NO <input type="text"/>
			*Can Full Expected Pressure Be Held At Previous Shoe?
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=	63	NO <input type="text" value="OK"/>
Required Casing/BOPE Test Pressure=		300	psi
*Max Pressure Allowed @ Previous Casing Shoe=		0	psi *Assumes 1psi/ft frac gradient

Calculations	PROD String	5.500	"
Max BHP (psi)	.052*Setting Depth*MW=	2895	
			BOPE Adequate For Drilling And Setting Casing at Depth?
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=	2153	NO <input type="text"/>
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=	1534	YES <input type="text" value="OK"/>
			*Can Full Expected Pressure Be Held At Previous Shoe?
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=	1600	NO <input type="text" value="Reasonable for area"/>
Required Casing/BOPE Test Pressure=		2000	psi
*Max Pressure Allowed @ Previous Casing Shoe=		300	psi *Assumes 1psi/ft frac gradient

Calculations	P2 String	4.500	"
Max BHP (psi)	.052*Setting Depth*MW=	2832	
			BOPE Adequate For Drilling And Setting Casing at Depth?
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=	2106	NO <input type="text"/>
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=	1501	YES <input type="text" value="OK"/>
			*Can Full Expected Pressure Be Held At Previous Shoe?
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=	2861	YES <input type="text" value="OK"/>
Required Casing/BOPE Test Pressure=		2000	psi
*Max Pressure Allowed @ Previous Casing Shoe=		6185	psi *Assumes 1psi/ft frac gradient

Calculations	String		"
Max BHP (psi)	.052*Setting Depth*MW=		
			BOPE Adequate For Drilling And Setting Casing at Depth?
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=		NO <input type="text"/>
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=		NO <input type="text"/>
			*Can Full Expected Pressure Be Held At Previous Shoe?
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=		NO <input type="text"/>
Required Casing/BOPE Test Pressure=			psi

CONFIDENTIAL

Well name:	43013509600000 GMBU 1A-32-8-17H	
Operator:	NEWFIELD PRODUCTION COMPANY	
String type:	Surface	Project ID: 43-013-50960
Location:	DUCHESNE COUNTY	

Design parameters:

Collapse

Mud weight: 8.330 ppg
Design is based on evacuated pipe.

Burst

Max anticipated surface pressure: 264 psi
Internal gradient: 0.120 psi/ft
Calculated BHP: 300 psi

No backup mud specified.

Minimum design factors:

Collapse:

Design factor: 1.125

Burst:

Design factor: 1.00

Tension:

8 Round STC: 1.80 (J)
8 Round LTC: 1.70 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Tension is based on air weight.
Neutral point: 263 ft

Environment:

H2S considered? No
Surface temperature: 74 °F
Bottom hole temperature: 78 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 100 ft

Cement top: 105 ft

Non-directional string.

Re subsequent strings:

Next setting depth: 6,185 ft
Next mud weight: 9.000 ppg
Next setting BHP: 2,892 psi
Fracture mud wt: 19.250 ppg
Fracture depth: 300 ft
Injection pressure: 300 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost (\$)
1	300	8.625	28.00	I-55	LT&C	300	300	7.892	11868
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	130	1880	14.496	300	3390	11.30	8.4	348	41.47 J

Prepared by: Helen Sadik-Macdonald
Div of Oil, Gas & Mining

Phone: 801 538-5357
FAX: 801-359-3940

Date: November 21, 2011
Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 300 ft, a mud weight of 8.33 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Well name:	43013509600000 GMBU 1A-32-8-17H		
Operator:	NEWFIELD PRODUCTION COMPANY		
String type:	Production	Project ID:	43-013-50960
Location:	DUCHESNE COUNTY		

Design parameters:

Collapse

Mud weight: 9.000 ppg
 Design is based on evacuated pipe.

Burst

Max anticipated surface pressure: 1,531 psi
 Internal gradient: 0.220 psi/ft
 Calculated BHP: 2,892 psi

No backup mud specified.

Minimum design factors:

Collapse:

Design factor: 1.125

Burst:

Design factor: 1.00

Tension:

8 Round STC: 1.80 (J)
 8 Round LTC: 1.80 (J)
 Buttress: 1.60 (J)
 Premium: 1.50 (J)
 Body yield: 1.60 (B)

Tension is based on air weight.
 Neutral point: 5,343 ft

Environment:

H2S considered? No
 Surface temperature: 74 °F
 Bottom hole temperature: 161 °F
 Temperature gradient: 1.40 °F/100ft
 Minimum section length: 100 ft
 Cement top: 2,142 ft

Directional well information:

Kick-off point: 5665 ft
 Departure at shoe: 538 ft
 Maximum dogleg: 11.01 °/100ft
 Inclination at shoe: 91.84 °

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost (\$)
1	6500	5.5	20.00	N-80	LT&C	6185	6500	4.653	43113
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	2892	8339	2.884	2892	9190	3.18	123.7	428	3.46 J

Prepared by: Helen Sadik-Macdonald
 Div of Oil, Gas & Mining

Phone: 801 538-5357
 FAX: 801-359-3940

Date: November 21, 2011
 Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 6185 ft, a mud weight of 9 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Collapse strength is (biaxially) derated for doglegs in directional wells by multiplying the tensile stress by the cross section area to calculate a

Well name:	43013509600000 GMBU 1A-32-8-17H	
Operator:	NEWFIELD PRODUCTION COMPANY	
String type:	Production Liner	Project ID: 43-013-50960
Location:	DUCHESNE COUNTY	

Design parameters:

Collapse

Mud weight: 9.000 ppg
Design is based on evacuated pipe.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No
Surface temperature: 74 °F
Bottom hole temperature: 159 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 1,000 ft

Burst

Max anticipated surface pressure: 1,498 psi
Internal gradient: 0.220 psi/ft
Calculated BHP 2,829 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.60 (B)

Tension is based on air weight.
Neutral point: 0 ft

Liner top: 6,500 ft

Directional well information:

Kick-off point: 5665 ft
Departure at shoe: 4723 ft
Maximum dogleg: 0 °/100ft
Inclination at shoe: 91.84 °

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost (\$)
1	4187	4.5	11.60	P-110	LT&C	6051	10687	3.875	20173
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	2829	7580	2.679	2859	10690	3.74	-1.6	279	99.99 J

Prepared by: Helen Sadik-Macdonald
Div of Oil, Gas & Mining

Phone: 801 538-5357
FAX: 801-359-3940

Date: November 21, 2011
Salt Lake City, Utah

Remarks:

For this liner string, the top is rounded to the nearest 100 ft. Collapse is based on a vertical depth of 6051 ft, a mud weight of 9 ppg. The Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Collapse strength is (biaxially) derated for doglegs in directional wells by multiplying the tensile stress by the cross section area to calculate a

ON-SITE PREDRILL EVALUATION

Utah Division of Oil, Gas and Mining

Operator NEWFIELD PRODUCTION COMPANY
Well Name GMBU 1A-32-8-17H
API Number 43013509600000 **APD No** 4556 **Field/Unit** MONUMENT BUTTE
Location: 1/4,1/4 NENE **Sec** 32 **Tw** 8.0S **Rng** 17.0E 797 FNL 863 FEL
GPS Coord (UTM) **Surface Owner**

Participants

M. Jones (UDOGM), T. Eaton (Newfield), B. Williams, A. Hansen (UDWR), Corie Miller (Tri-State).

Regional/Local Setting & Topography

Proposed location is located approximately 11 road miles south of Myton, Utah, north of the Castle Peak Draw area. Lower elevations of surrounding area create small drainages that will typically run water during storm events.

Surface Use Plan

Current Surface Use

Grazing
Wildlife Habitat

New Road Miles

0

Well Pad

Width 200 **Length** 400

Src Const Material

Onsite

Surface Formation

Ancillary Facilities

Waste Management Plan Adequate?

Environmental Parameters

Affected Floodplains and/or Wetlands N

Flora / Fauna

mat salt brush.

Soil Type and Characteristics

rocky clay.

Erosion Issues N

Sedimentation Issues N

Site Stability Issues N

Drainage Diversion Required? Y

Divert drainages away from pad.

Berm Required? Y

Berm location to contain spills.

Erosion Sedimentation Control Required? N

Paleo Survey Run? Y Paleo Potential Observed? N Cultural Survey Run? Y Cultural Resources? N

Reserve Pit

Site-Specific Factors

Site Ranking

Distance to Groundwater (feet)	>200	0
Distance to Surface Water (feet)	>1000	0
Dist. Nearest Municipal Well (ft)	>5280	0
Distance to Other Wells (feet)	300 to 1320	10
Native Soil Type	High permeability	20
Fluid Type	Fresh Water	5
Drill Cuttings	Normal Rock	0
Annual Precipitation (inches)		0
Affected Populations		
Presence Nearby Utility Conduits	Not Present	0
Final Score		35

1 Sensitivity Level

Characteristics / Requirements


Dugout earthen (165 x 100 x 8) exterior to pad dimensions.

Closed Loop Mud Required? N Liner Required? Y Liner Thickness 16 Pit Underlayment Required? N

Other Observations / Comments

Mark Jones
Evaluator

9/29/2011
Date / Time

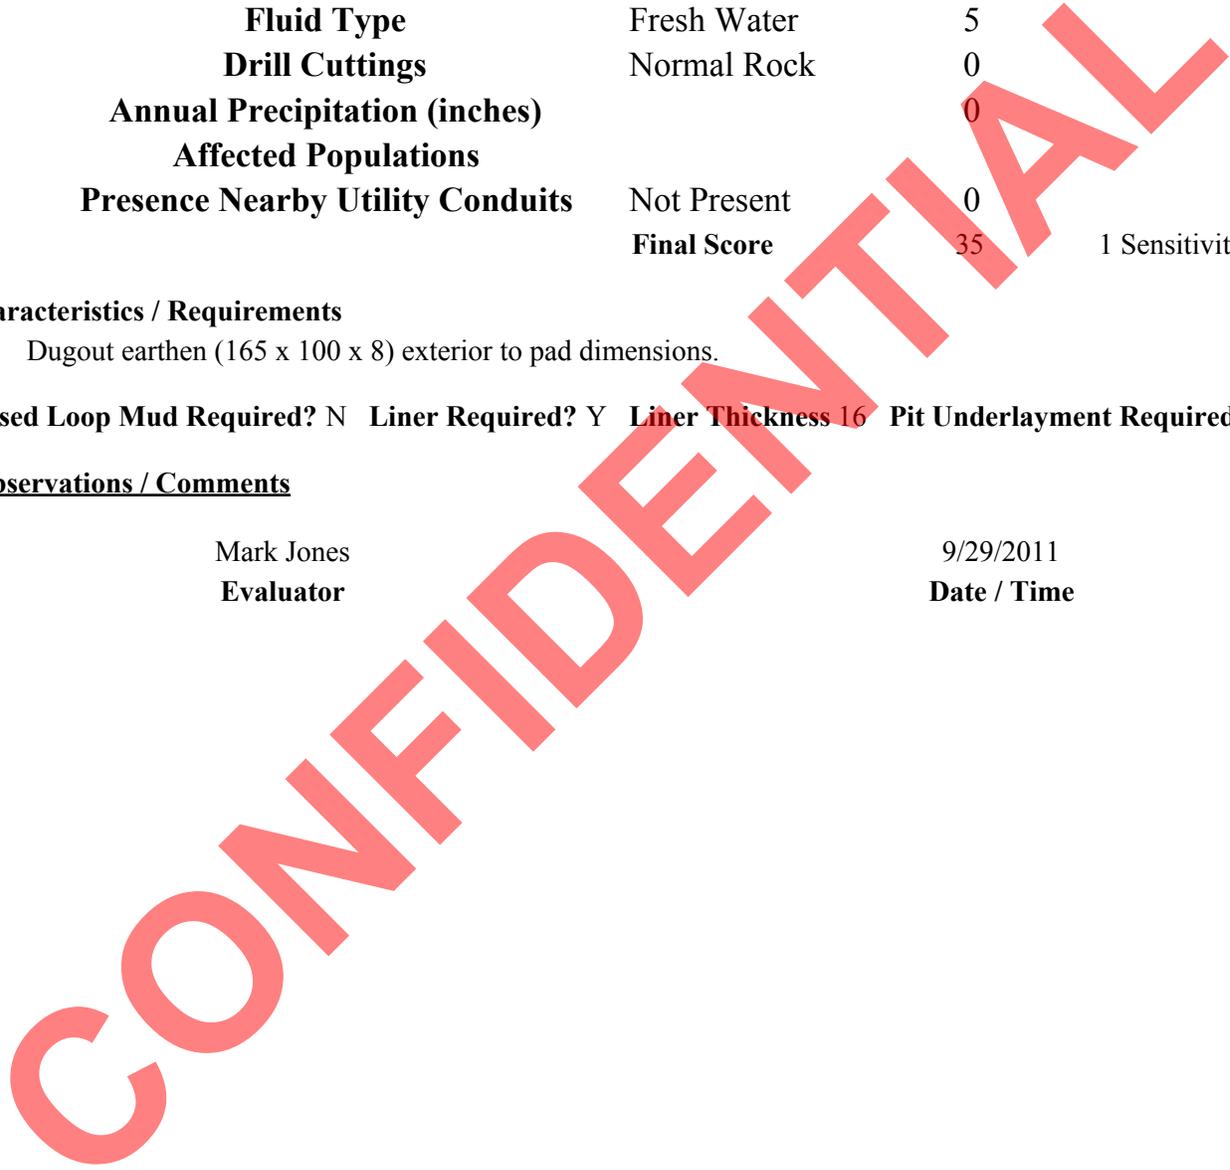

Application for Permit to Drill Statement of Basis

12/12/2011

Utah Division of Oil, Gas and Mining

Page 1

APD No	API WellNo	Status	Well Type	Surf Owner	CBM
4556	43013509600000	LOCKED	OW	S	No
Operator	NEWFIELD PRODUCTION COMPANY		Surface Owner-APD		
Well Name	GMBU 1A-32-8-17H		Unit	GMBU (GRRV)	
Field	MONUMENT BUTTE		Type of Work	DRILL	
Location	NENE 32 8S 17E S 797 FNL 863 FEL		GPS Coord (UTM)	583218E	4437040N

Geologic Statement of Basis

Newfield proposes to set 300' of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 200'. A search of Division of Water Rights records shows one water well within a 10,000 foot radius of the center of section 32. No depth is listed for this well. The well is owned by the BLM and its listed use is for stock watering. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water. The proposed casing and cement should adequately protect useable sources of underground water.

Brad Hill
APD Evaluator

11/1/2011
Date / Time

Surface Statement of Basis

Proposed location is located approximately 11 road miles south of Myton, Utah, north of the Castle Peak Draw area. Lower elevations of surrounding area create small drainages that will typically run water during storm events. The location should be bermed to prevent spills from leaving the confines of the pad. Fencing around the reserve pit will be necessary once the well is drilled to prevent wildlife and livestock from becoming a problem. Drainages should be diverted around and away from wellpad and access road. A synthetic liner of 16 mils (minimum) should be utilized in the reserve pit.

Mark Jones
Onsite Evaluator

9/29/2011
Date / Time

Conditions of Approval / Application for Permit to Drill

Category	Condition
Pits	A synthetic liner with a minimum thickness of 16 mils shall be properly installed and maintained in the reserve pit.
Surface	The well site shall be bermed to prevent fluids from leaving the pad.
Surface	Drainages adjacent to the proposed pad shall be diverted around the location.
Surface	The reserve pit shall be fenced upon completion of drilling operations.

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 9/9/2011

API NO. ASSIGNED: 43013509600000

WELL NAME: GMBU 1A-32-8-17H

OPERATOR: NEWFIELD PRODUCTION COMPANY (N2695)

PHONE NUMBER: 435 646-4825

CONTACT: Mandie Crozier

PROPOSED LOCATION: NENE 32 080S 170E

Permit Tech Review:

SURFACE: 0797 FNL 0863 FEL

Engineering Review:

BOTTOM: 0220 FSL 2420 FWL

Geology Review:

COUNTY: DUCHESNE

LATITUDE: 40.07952

LONGITUDE: -110.02397

UTM SURF EASTINGS: 583218.00

NORTHINGS: 4437040.00

FIELD NAME: MONUMENT BUTTE

LEASE TYPE: 3 - State

LEASE NUMBER: ML-22060

PROPOSED PRODUCING FORMATION(S): GREEN RIVER

SURFACE OWNER: 3 - State

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

- PLAT
- Bond: STATE - B001834
- Potash
- Oil Shale 190-5
- Oil Shale 190-3
- Oil Shale 190-13
- Water Permit: 43-7478
- RDCC Review:
- Fee Surface Agreement
- Intent to Commingle

Commingling Approved

LOCATION AND SITING:

- R649-2-3.
- Unit:** GMBU (GRRV)
- R649-3-2. General
- R649-3-3. Exception
- Drilling Unit
- Board Cause No:** Cause 213-11
- Effective Date:** 11/30/2009
- Siting:** Suspends General Siting
- R649-3-11. Directional Drill

Comments: Presite Completed

Stipulations:
 5 - Statement of Basis - bhill
 8 - Cement to Surface -- 2 strings - hmadonald
 27 - Other - bhill
 28 - Other2 - bhill



GARY R. HERBERT
Governor

GREGORY S. BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: GMBU 1A-32-8-17H
API Well Number: 43013509600000
Lease Number: ML-22060
Surface Owner: STATE
Approval Date: 12/12/2011

Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis (copy attached).

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

In accordance with Utah Admin. R.649-3-21, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Cement volumes for the 8 5/8" and 5 1/2" casing strings shall be determined from actual hole diameters in order to place cement from the pipe setting depths back to the surface.

Additional Approvals:

The operator is required to obtain approval from the Division of Oil, Gas and mining before performing any of the following actions during the drilling of this well:

- Any changes to the approved drilling plan – contact Dustin Doucet
- Significant plug back of the well – contact Dustin Doucet
- Plug and abandonment of the well – contact Dustin Doucet

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels
OR
submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <http://oilgas.ogm.utah.gov>
- 24 hours prior to testing blowout prevention equipment - contact Dan Jarvis
- 24 hours prior to cementing or testing casing – contact Dan Jarvis
- Within 24 hours of making any emergency changes to the approved drilling program – contact Dustin Doucet
- 24 hours prior to commencing operations to plug and abandon the well – contact Dan Jarvis

Contact Information:

The following are Division of Oil, Gas and Mining contacts and their telephone numbers (please leave a voicemail message if the person is not available to take the call):

- Carol Daniels 801-538-5284 - office
- Dustin Doucet 801-538-5281 - office
801-733-0983 - after office hours
- Dan Jarvis 801-538-5338 - office
801-231-8956 - after office hours

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

Approved By:




For John Rogers
Associate Director, Oil & Gas

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	
5. LEASE DESIGNATION AND SERIAL NUMBER: ML-22060	
6. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)	
1. TYPE OF WELL Oil Well	
8. WELL NAME and NUMBER: GMBU 1A-32-8-17H	
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY	
9. API NUMBER: 43013509600000	
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052 PHONE NUMBER: 435 646-4825 Ext	
9. FIELD and POOL or WILDCAT: MONUMENT BUTTE	
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0797 FNL 0863 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NENE Section: 32 Township: 08.0S Range: 17.0E Meridian: S	
COUNTY: DUCHESNE	
STATE: UTAH	

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 12/12/2012	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
 Newfield proposes to extend the Application for Permit to Drill this well.

Approved by the Utah Division of Oil, Gas and Mining
Date: November 27, 2012
By: 

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 11/26/2012	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013509600000

API: 43013509600000

Well Name: GMBU 1A-32-8-17H

Location: 0797 FNL 0863 FEL QTR NENE SEC 32 TWNP 080S RNG 170E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 12/12/2011

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

Signature: Mandie Crozier

Date: 11/26/2012

Title: Regulatory Tech Representing: NEWFIELD PRODUCTION COMPANY

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
5. LEASE DESIGNATION AND SERIAL NUMBER: ML-22060	
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	
6. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)	
8. WELL NAME and NUMBER: GMBU 1A-32-8-17H	
9. API NUMBER: 43013509600000	
9. FIELD and POOL or WILDCAT: MONUMENT BUTTE	
1. TYPE OF WELL Oil Well	
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY	
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052	
PHONE NUMBER: 435 646-4825 Ext	
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0797 FNL 0863 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NENE Section: 32 Township: 08.0S Range: 17.0E Meridian: S	
COUNTY: DUCHESNE	
STATE: UTAH	

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 12/12/2013	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield proposes to extend the Application for Permit to Drill this well.

Approved by the Utah Division of Oil, Gas and Mining

Date: November 18, 2013

By: 

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 11/12/2013	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013509600000

API: 43013509600000

Well Name: GMBU 1A-32-8-17H

Location: 0797 FNL 0863 FEL QTR NENE SEC 32 TWNP 080S RNG 170E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 12/12/2011

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Mandie Crozier

Date: 11/12/2013

Title: Regulatory Tech Representing: NEWFIELD PRODUCTION COMPANY



GARY R. HERBERT
Governor

SPENCER J. COX
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

December 18, 2014

Newfield Production Company
Rt. 3 Box 3630
Myton, UT 84052


Re: APD Rescinded – GMBU 1A-32-8-17H, Sec. 32 T.8S, R. 17E
Duchesne County, Utah API No. 43-013-50960

Ladies and Gentlemen:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on December 12, 2011. On November 27, 2012 and November 18, 2013, the Division granted a one-year APD extension. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective December 18, 2014.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

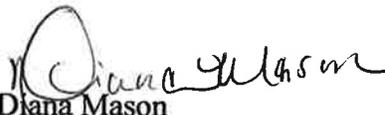
Diana Mason
Environmental Scientist

cc: Well File
SITLA, Ed Bonner