

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL		1. WELL NAME and NUMBER GMBU C-2-9-15
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>		3. FIELD OR WILDCAT MONUMENT BUTTE
4. TYPE OF WELL Oil Well Coalbed Methane Well: NO		5. UNIT or COMMUNITIZATION AGREEMENT NAME GMBU (GRRV)
6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY		7. OPERATOR PHONE 435 646-4825
8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Myton, UT, 84052		9. OPERATOR E-MAIL mcrozier@newfield.com
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) ml-43538	11. MINERAL OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>	
12. SURFACE OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>		13. NAME OF SURFACE OWNER (if box 12 = 'fee')
14. SURFACE OWNER PHONE (if box 12 = 'fee')		15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')
16. SURFACE OWNER E-MAIL (if box 12 = 'fee')		17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')
18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>		19. SLANT VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>

20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN
LOCATION AT SURFACE	655 FNL 1961 FEL	NWNE	2	9.0 S	15.0 E	S
Top of Uppermost Producing Zone	366 FNL 2309 FEL	NWNE	2	9.0 S	15.0 E	S
At Total Depth	80 FNL 2635 FEL	NWNE	2	9.0 S	15.0 E	S

21. COUNTY DUCHESNE	22. DISTANCE TO NEAREST LEASE LINE (Feet) 80	23. NUMBER OF ACRES IN DRILLING UNIT 20
24. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 1455	26. PROPOSED DEPTH MD: 6371 TVD: 6300	
27. ELEVATION - GROUND LEVEL 5901	28. BOND NUMBER B001834	29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 437478

Hole, Casing, and Cement Information										
String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement	Sacks	Yield	Weight
Surf	12.25	8.625	0 - 300	24.0	J-55 ST&C	8.3	Class G	138	1.17	15.8
Prod	7.875	5.5	0 - 6371	15.5	J-55 ST&C	8.3	Premium Lite High Strength	302	3.26	11.0
							50/50 Poz	363	1.24	14.3

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)	<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)	<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP

NAME Mandie Crozier	TITLE Regulatory Tech	PHONE 435 646-4825
SIGNATURE	DATE 09/14/2011	EMAIL mcrozier@newfield.com

API NUMBER ASSIGNED 43013509710000	APPROVAL  Permit Manager
--	--

NEWFIELD PRODUCTION COMPANY
 GMBU C-2-9-15
 AT SURFACE: NW/NE SECTION 2, T9S, R15E
 DUCHESNE COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0' – 1590'
Green River	1590'
Wasatch	6225'
Proposed TD	6371'

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil) 1590' – 6225'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO ₃) (mg/l)
Dissolved Bicarbonate (NaHCO ₃) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO ₄) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. **Casing Design: GMBU C-2-9-15**

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	300'	24.0	J-55	STC	2,950 17.53	1,370 14.35	244,000 33.89
Prod casing 5-1/2"	0'	6,371'	15.5	J-55	LTC	4,810 2.37	4,040 1.99	217,000 2.20

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe =	13.0 ppg
Pore pressure at surface casing shoe =	8.33 ppg
Pore pressure at prod casing shoe =	8.33 ppg
Gas gradient =	0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. **Cementing Design: GMBU C-2-9-15**

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft ³ /sk)
			ft ³			
Surface casing	300'	Class G w/ 2% CaCl	138	30%	15.8	1.17
			161			
Prod casing Lead	4,371'	Prem Lite II w/ 10% gel + 3% KCl	302 985	30%	11.0	3.26
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363 451	30%	14.3	1.24

*Actual volume pumped will be 15% over the caliper log

- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
- Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ± 300 feet will be drilled with an air/mist system. The air rig is equipped with a 6 1/2" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ± 300 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.


9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the first quarter of 2012, and take approximately seven (7) days from spud to rig release.

Access Road Map

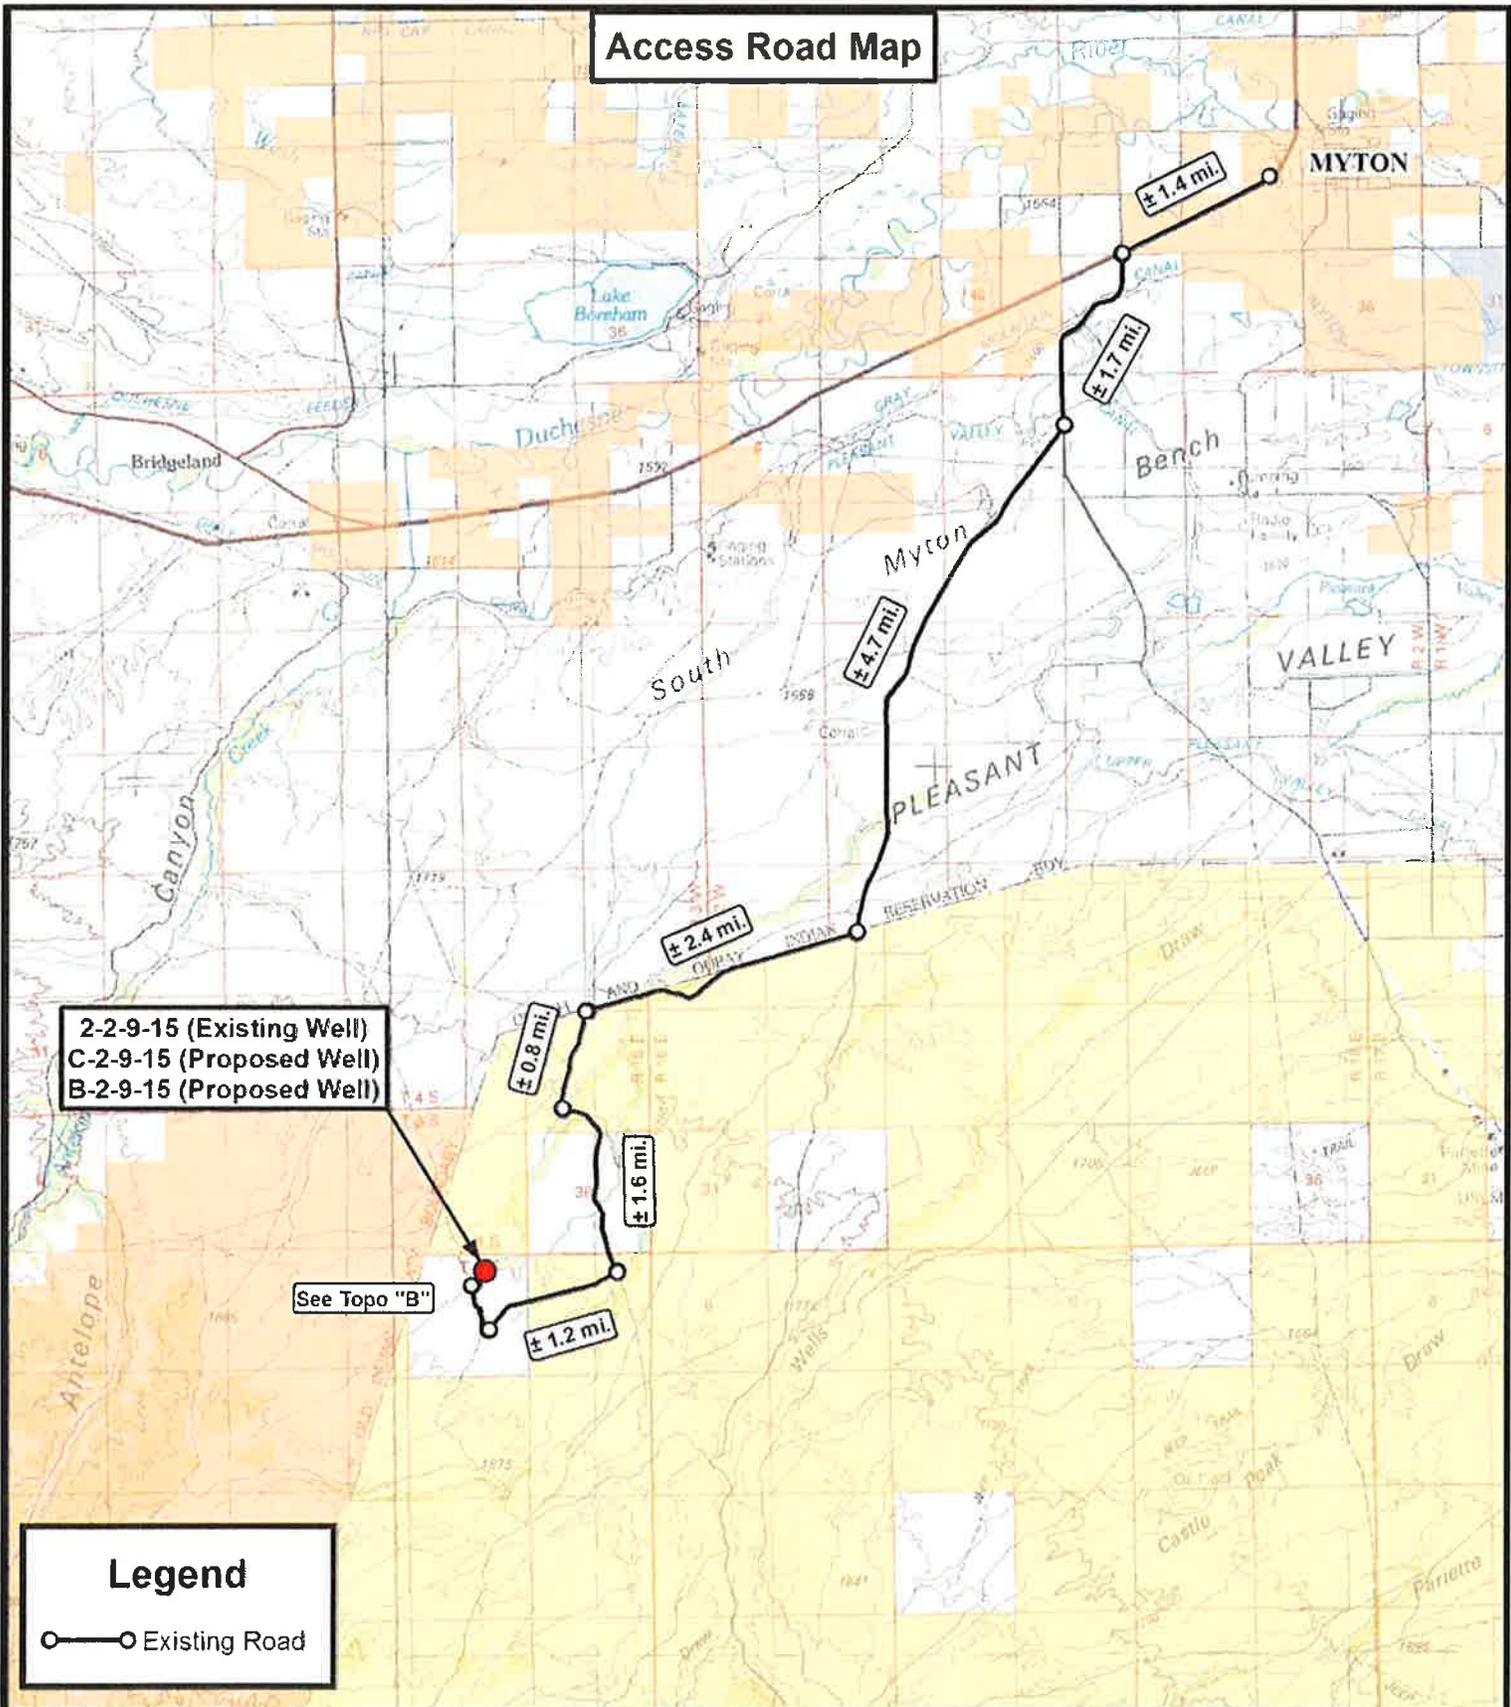

2-2-9-15 (Existing Well)
 C-2-9-15 (Proposed Well)
 B-2-9-15 (Proposed Well)

See Topo "B"

Legend

○—○ Existing Road

Tri State Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
 F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY


2-2-9-15 (Existing Well)
 C-2-9-15 (Proposed Well)
 B-2-9-15 (Proposed Well)
 SEC. 2, T9S, R15E, S.L.B.&M. Duchesne County, UT.

DRAWN BY:	C.H.M.	REVISED:	VERSION:
DATE:	08-08-2011		V1
SCALE:	1:100,000		

TOPOGRAPHIC MAP

SHEET **A**

Access Road Map

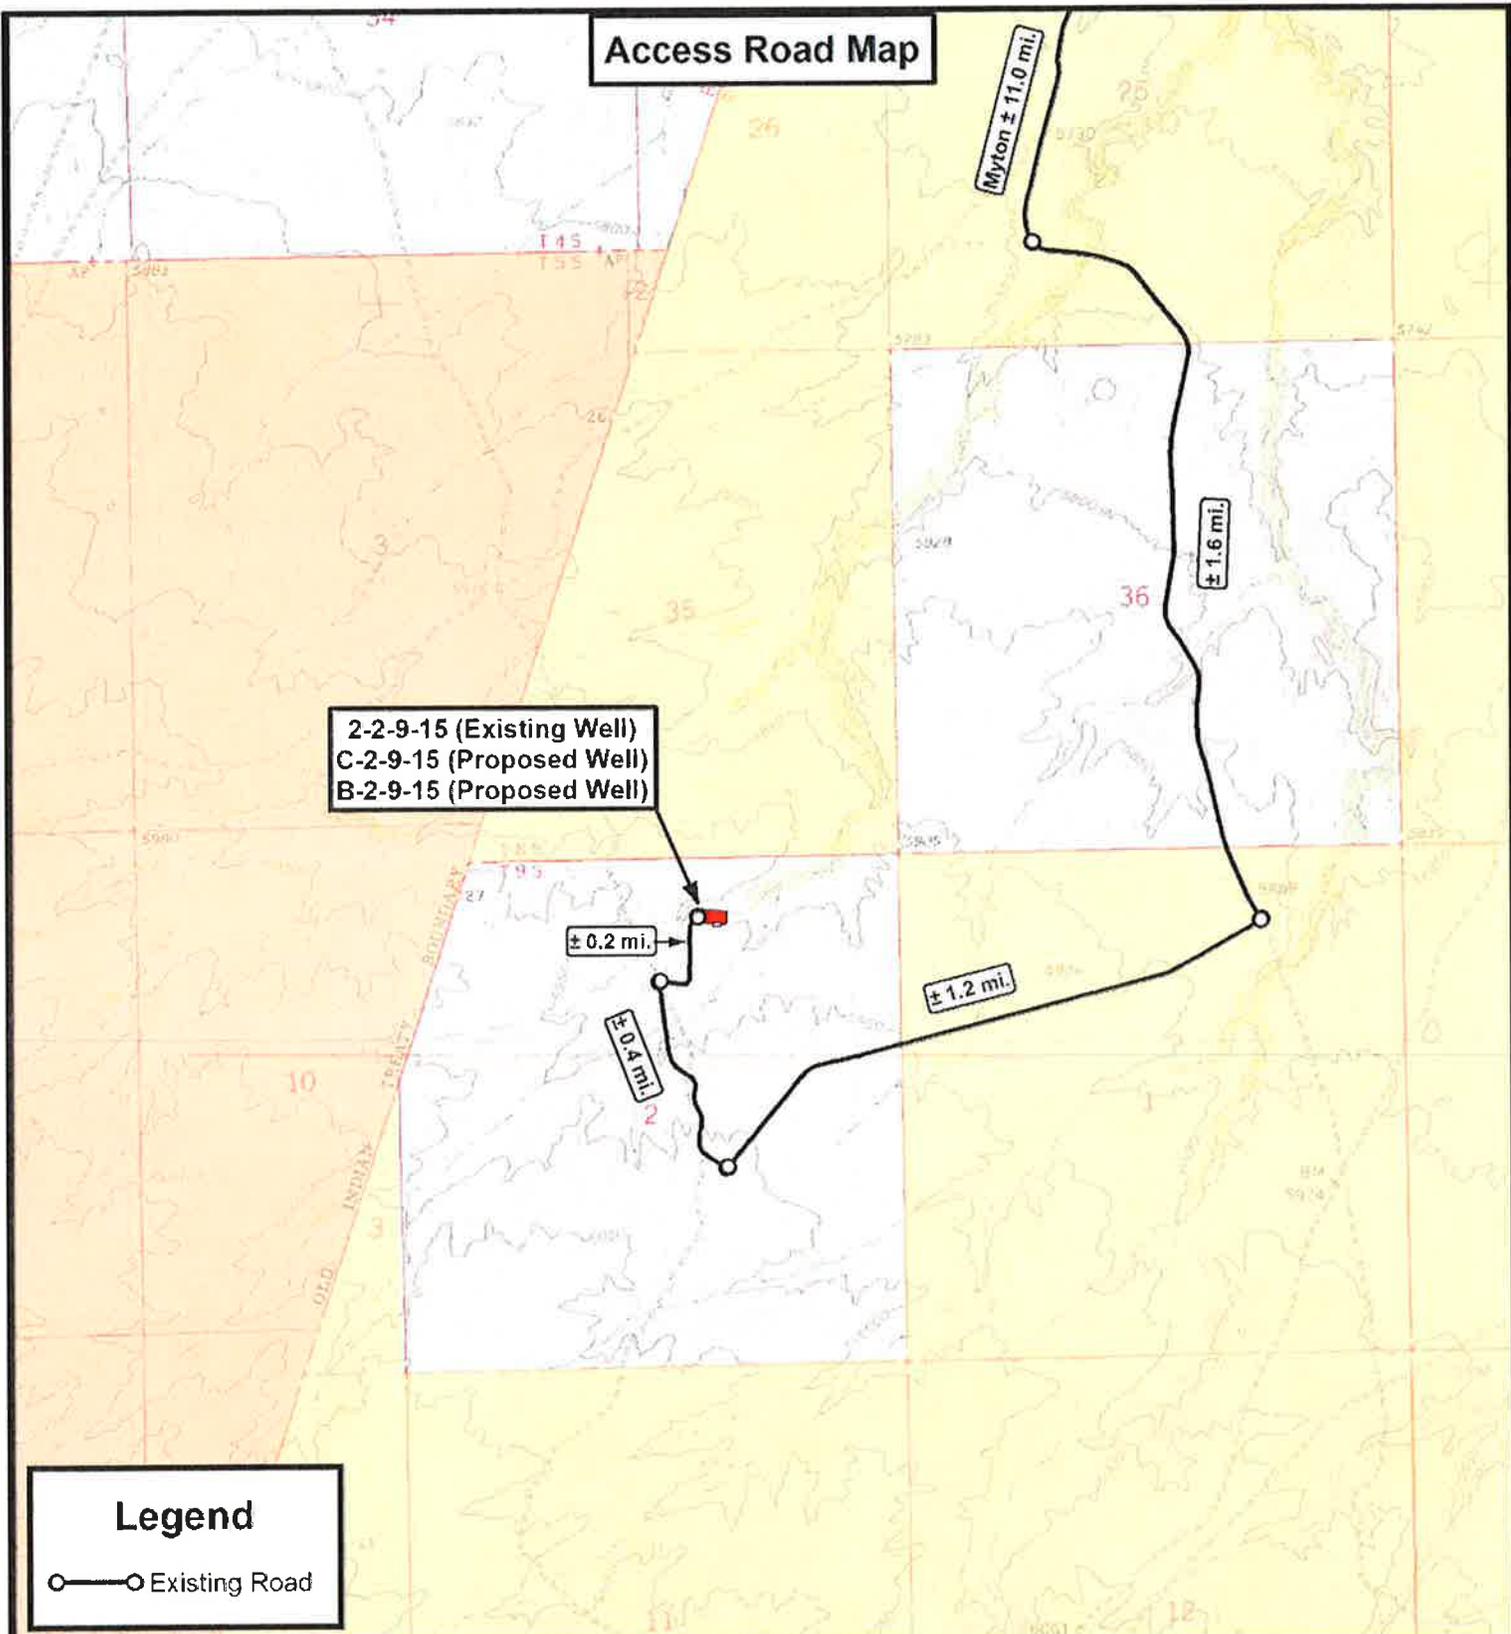

2-2-9-15 (Existing Well)
 C-2-9-15 (Proposed Well)
 B-2-9-15 (Proposed Well)

Legend

—○— Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078
 P: (435) 781-2501
 F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY
 2-2-9-15 (Existing Well)
 C-2-9-15 (Proposed Well)
 B-2-9-15 (Proposed Well)
 SEC. 2, T9S, R15E, S.L.B.&M. Duchesne County, UT.

DRAWN BY:	C.H.M.	REVISED:	VERSION:
DATE:	08-08-2011		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET
B

Proposed Pipeline Map

2-2-9-15 (Existing Well)
 C-2-9-15 (Proposed Well)
 B-2-9-15 (Proposed Well)

Existing Flowline
 Existing Gas Pipeline
 Tie in at Existing Waterline
 ± 976'

Legend

- Existing Road
- Proposed Waterline

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078
 P: (435) 781-2501
 F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

2-2-9-15 (Existing Well)
 C-2-9-15 (Proposed Well)
 B-2-9-15 (Proposed Well)
 SEC. 2, T9S, R15E, S.L.B.&M. Duchesne County, UT.


DRAWN BY:	C.H.M.	REVISED:	VERSION:
DATE:	08-08-2011		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET
C

Exhibit "B" Map

2-2-9-15 (Existing Well)
 C-2-9-15 (Proposed Well)
 B-2-9-15 (Proposed Well)

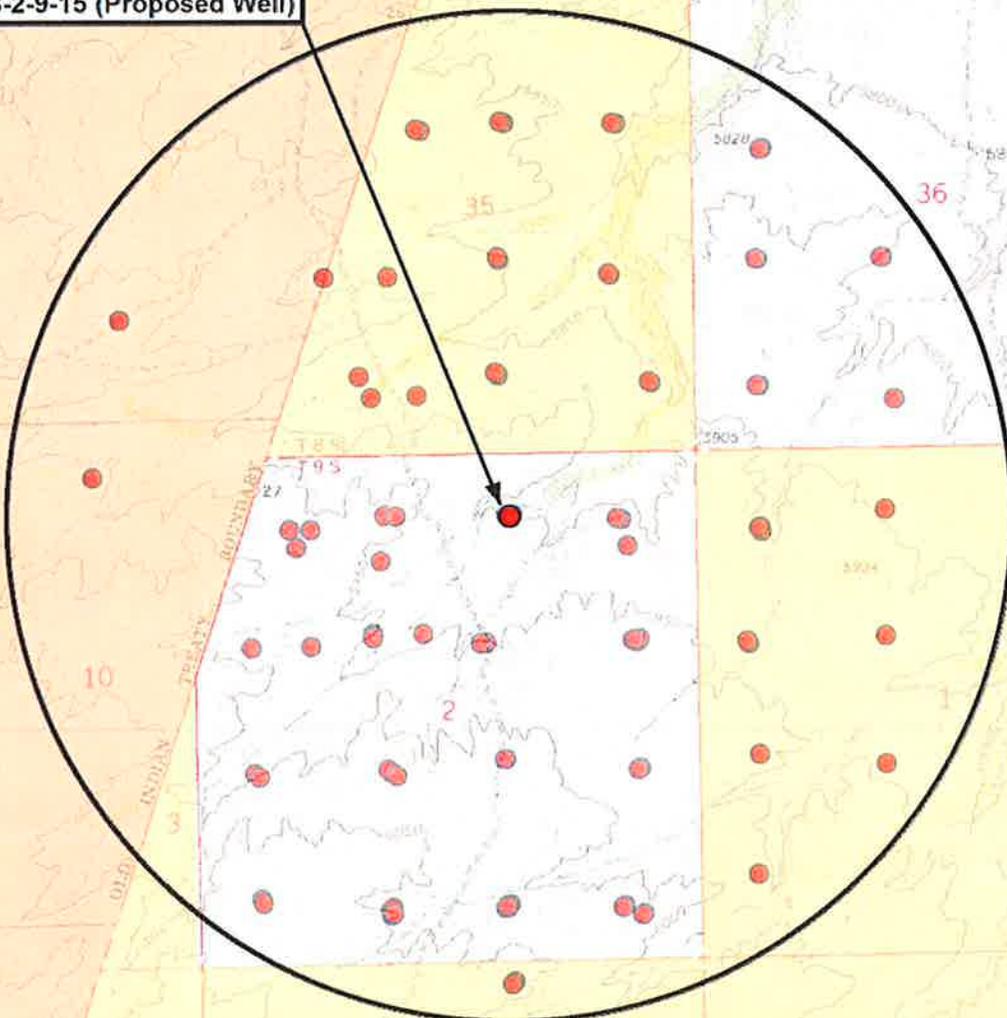

Legend

-  1 Mile Radius
-  Pad Location

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



**Tri State
 Land Surveying, Inc.**
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
 F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

2-2-9-15 (Existing Well)
 C-2-9-15 (Proposed Well)
 B-2-9-15 (Proposed Well)
 SEC. 2, T9S, R15E, S.L.B.&M. Duchesne County, UT.

DRAWN BY:	C.H.M.	REVISED:	VERSION:
DATE:	08-08-2011		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET
D



NEWFIELD EXPLORATION

USGS Myton SW (UT)

SECTION 2 T9, R15

C-2-9-15

Wellbore #1

Plan: Design #1

Standard Planning Report

16 August, 2011





Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well C-2-9-15
Company:	NEWFIELD EXPLORATION	TVD Reference:	C-2-9-15 @ 5913.0ft (Original Well Elev)
Project:	USGS Myton SW (UT)	MD Reference:	C-2-9-15 @ 5913.0ft (Original Well Elev)
Site:	SECTION 2 T9, R15	North Reference:	True
Well:	C-2-9-15	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		

Site	SECTION 2 T9, R15				
Site Position:		Northing:	7,191,145.41 ft	Latitude:	40° 3' 15.350 N
From:	Lat/Long	Easting:	2,005,088.49 ft	Longitude:	110° 11' 49.770 W
Position Uncertainty:	0.0 ft	Slot Radius:	"	Grid Convergence:	0.83 °

Well	C-2-9-15, SHL LAT: 40 03 55.51 LONG: -110 11 48.91					
Well Position	+N/-S	4,063.5 ft	Northing:	7,195,209.42 ft	Latitude:	40° 3' 55.510 N
	+E/-W	66.9 ft	Easting:	2,005,096.15 ft	Longitude:	110° 11' 48.910 W
Position Uncertainty		0.0 ft	Wellhead Elevation:	5,913.0 ft	Ground Level:	5,901.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	2011/08/16	11.35	65.78	52,243

Design	Design #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.0	0.0	0.0	309.73

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,221.7	9.33	309.73	1,219.0	32.3	-38.8	1.50	1.50	0.00	309.73	
6,370.8	9.33	309.73	6,300.0	565.6	-680.6	0.00	0.00	0.00	0.00	C-2-9-15 TGT



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well C-2-9-15
Company:	NEWFIELD EXPLORATION	TVD Reference:	C-2-9-15 @ 5913.0ft (Original Well Elev)
Project:	USGS Myton SW (UT)	MD Reference:	C-2-9-15 @ 5913.0ft (Original Well Elev)
Site:	SECTION 2 T9, R15	North Reference:	True
Well:	C-2-9-15	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	1.50	309.73	700.0	0.8	-1.0	1.3	1.50	1.50	0.00
800.0	3.00	309.73	799.9	3.3	-4.0	5.2	1.50	1.50	0.00
900.0	4.50	309.73	899.7	7.5	-9.1	11.8	1.50	1.50	0.00
1,000.0	6.00	309.73	999.3	13.4	-16.1	20.9	1.50	1.50	0.00
1,100.0	7.50	309.73	1,098.6	20.9	-25.1	32.7	1.50	1.50	0.00
1,200.0	9.00	309.73	1,197.5	30.1	-36.2	47.0	1.50	1.50	0.00
1,221.7	9.33	309.73	1,219.0	32.3	-38.8	50.5	1.50	1.50	0.00
1,300.0	9.33	309.73	1,296.2	40.4	-48.6	63.2	0.00	0.00	0.00
1,400.0	9.33	309.73	1,394.9	50.7	-61.0	79.4	0.00	0.00	0.00
1,500.0	9.33	309.73	1,493.6	61.1	-73.5	95.6	0.00	0.00	0.00
1,600.0	9.33	309.73	1,592.3	71.5	-86.0	111.8	0.00	0.00	0.00
1,700.0	9.33	309.73	1,690.9	81.8	-98.4	128.0	0.00	0.00	0.00
1,800.0	9.33	309.73	1,789.6	92.2	-110.9	144.2	0.00	0.00	0.00
1,900.0	9.33	309.73	1,888.3	102.5	-123.4	160.4	0.00	0.00	0.00
2,000.0	9.33	309.73	1,987.0	112.9	-135.8	176.6	0.00	0.00	0.00
2,100.0	9.33	309.73	2,085.6	123.2	-148.3	192.8	0.00	0.00	0.00
2,200.0	9.33	309.73	2,184.3	133.6	-160.7	209.0	0.00	0.00	0.00
2,300.0	9.33	309.73	2,283.0	144.0	-173.2	225.2	0.00	0.00	0.00
2,400.0	9.33	309.73	2,381.7	154.3	-185.7	241.4	0.00	0.00	0.00
2,500.0	9.33	309.73	2,480.4	164.7	-198.1	257.6	0.00	0.00	0.00
2,600.0	9.33	309.73	2,579.0	175.0	-210.6	273.8	0.00	0.00	0.00
2,700.0	9.33	309.73	2,677.7	185.4	-223.1	290.0	0.00	0.00	0.00
2,800.0	9.33	309.73	2,776.4	195.7	-235.5	306.3	0.00	0.00	0.00
2,900.0	9.33	309.73	2,875.1	206.1	-248.0	322.5	0.00	0.00	0.00
3,000.0	9.33	309.73	2,973.8	216.5	-260.5	338.7	0.00	0.00	0.00
3,100.0	9.33	309.73	3,072.4	226.8	-272.9	354.9	0.00	0.00	0.00
3,200.0	9.33	309.73	3,171.1	237.2	-285.4	371.1	0.00	0.00	0.00
3,300.0	9.33	309.73	3,269.8	247.5	-297.8	387.3	0.00	0.00	0.00
3,400.0	9.33	309.73	3,368.5	257.9	-310.3	403.5	0.00	0.00	0.00
3,500.0	9.33	309.73	3,467.1	268.3	-322.8	419.7	0.00	0.00	0.00
3,600.0	9.33	309.73	3,565.8	278.6	-335.2	435.9	0.00	0.00	0.00
3,700.0	9.33	309.73	3,664.5	289.0	-347.7	452.1	0.00	0.00	0.00
3,800.0	9.33	309.73	3,763.2	299.3	-360.2	468.3	0.00	0.00	0.00
3,900.0	9.33	309.73	3,861.9	309.7	-372.6	484.5	0.00	0.00	0.00
4,000.0	9.33	309.73	3,960.5	320.0	-385.1	500.7	0.00	0.00	0.00
4,100.0	9.33	309.73	4,059.2	330.4	-397.5	516.9	0.00	0.00	0.00
4,200.0	9.33	309.73	4,157.9	340.8	-410.0	533.1	0.00	0.00	0.00
4,300.0	9.33	309.73	4,256.6	351.1	-422.5	549.3	0.00	0.00	0.00
4,400.0	9.33	309.73	4,355.2	361.5	-434.9	565.5	0.00	0.00	0.00
4,500.0	9.33	309.73	4,453.9	371.8	-447.4	581.7	0.00	0.00	0.00
4,600.0	9.33	309.73	4,552.6	382.2	-459.9	597.9	0.00	0.00	0.00
4,700.0	9.33	309.73	4,651.3	392.5	-472.3	614.2	0.00	0.00	0.00
4,800.0	9.33	309.73	4,750.0	402.9	-484.8	630.4	0.00	0.00	0.00
4,900.0	9.33	309.73	4,848.6	413.3	-497.2	646.6	0.00	0.00	0.00
5,000.0	9.33	309.73	4,947.3	423.6	-509.7	662.8	0.00	0.00	0.00
5,100.0	9.33	309.73	5,046.0	434.0	-522.2	679.0	0.00	0.00	0.00
5,200.0	9.33	309.73	5,144.7	444.3	-534.6	695.2	0.00	0.00	0.00



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well C-2-9-15
Company:	NEWFIELD EXPLORATION	TVD Reference:	C-2-9-15 @ 5913.0ft (Original Well Elev)
Project:	USGS Myton SW (UT)	MD Reference:	C-2-9-15 @ 5913.0ft (Original Well Elev)
Site:	SECTION 2 T9, R15	North Reference:	True
Well:	C-2-9-15	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,300.0	9.33	309.73	5,243.4	454.7	-547.1	711.4	0.00	0.00	0.00
5,400.0	9.33	309.73	5,342.0	465.1	-559.6	727.6	0.00	0.00	0.00
5,500.0	9.33	309.73	5,440.7	475.4	-572.0	743.8	0.00	0.00	0.00
5,600.0	9.33	309.73	5,539.4	485.8	-584.5	760.0	0.00	0.00	0.00
5,700.0	9.33	309.73	5,638.1	496.1	-597.0	776.2	0.00	0.00	0.00
5,800.0	9.33	309.73	5,736.7	506.5	-609.4	792.4	0.00	0.00	0.00
5,900.0	9.33	309.73	5,835.4	516.8	-621.9	808.6	0.00	0.00	0.00
6,000.0	9.33	309.73	5,934.1	527.2	-634.3	824.8	0.00	0.00	0.00
6,100.0	9.33	309.73	6,032.8	537.6	-646.8	841.0	0.00	0.00	0.00
6,200.0	9.33	309.73	6,131.5	547.9	-659.3	857.2	0.00	0.00	0.00
6,300.0	9.33	309.73	6,230.1	558.3	-671.7	873.4	0.00	0.00	0.00
6,370.8	9.33	309.73	6,300.0	565.6	-680.6	884.9	0.00	0.00	0.00





Project: USGS Myton SW (UT)
 Site: SECTION 2 T9, R15
 Well: C-2-9-15
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.35°

Magnetic Field
 Strength: 52242.5snT
 Dip Angle: 65.78°
 Date: 2011/08/16
 Model: IGRF2010

KOP @ 600'
 DOGLEG RATE 1.5 DEG/100
 TARGET RADIUS IS 75'

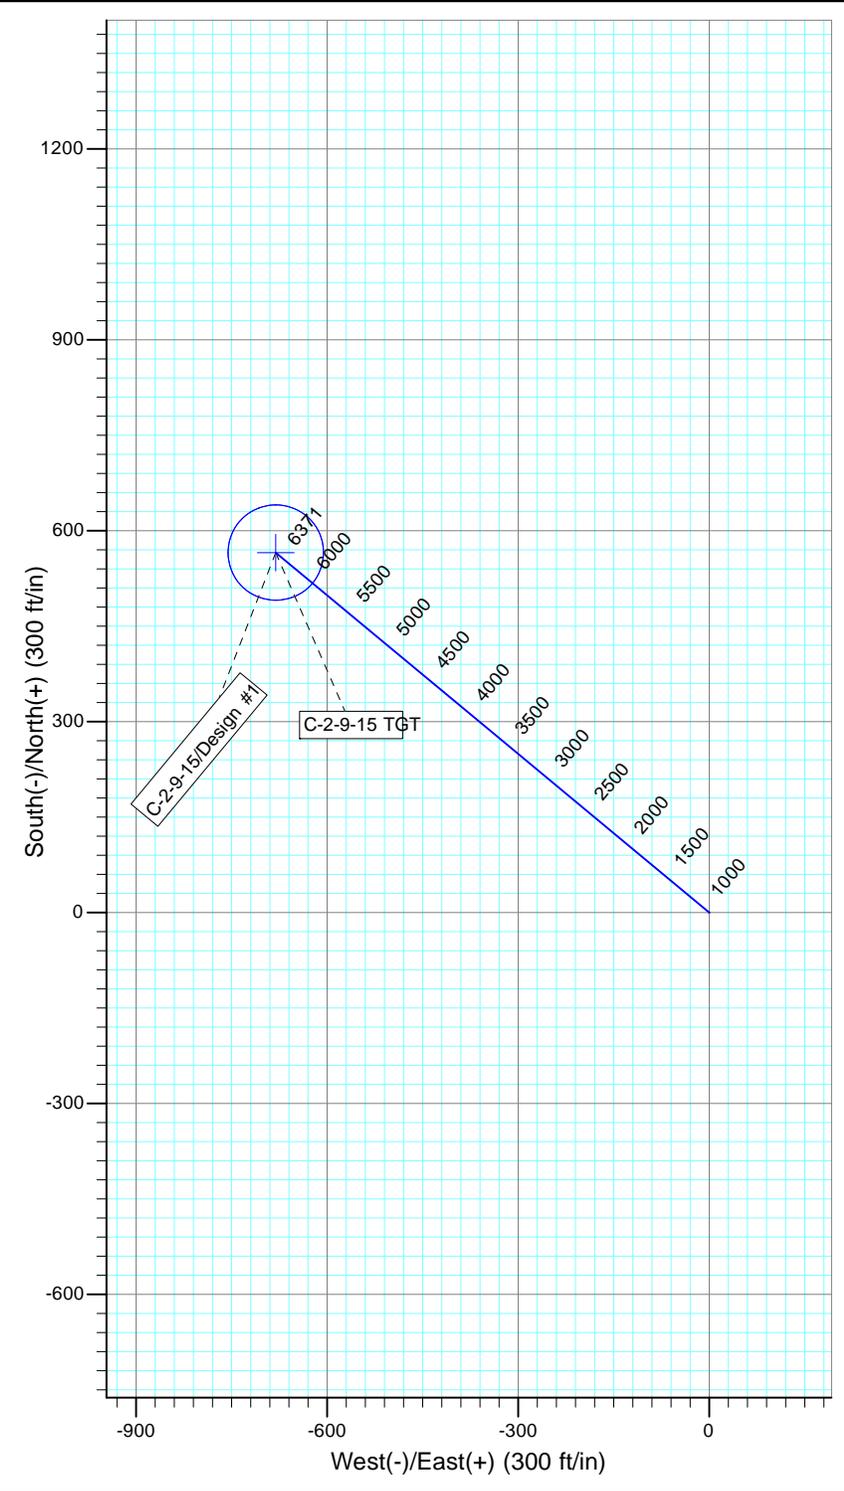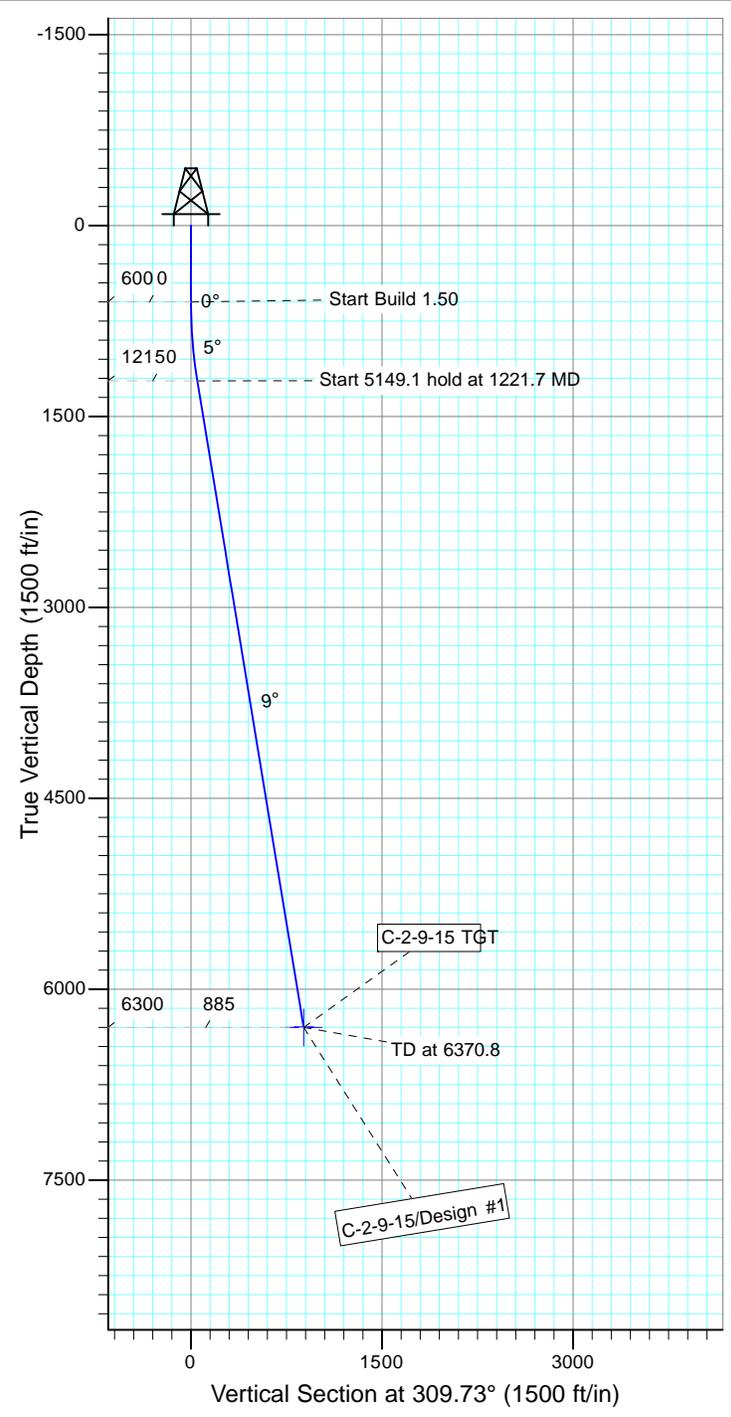

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
C-2-9-15 TGT	6300.0	565.6	-680.6	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1221.7	9.33	309.73	1219.0	32.3	-38.8	1.50	309.73	50.5	
4	6370.8	9.33	309.73	6300.0	565.6	-680.6	0.00	0.00	884.9	C-2-9-15 TGT



**NEWFIELD PRODUCTION COMPANY
GMBU C-2-9-15
AT SURFACE: NW/NE SECTION 2, T9S, R15E
DUCHESNE COUNTY, UTAH**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site GMBU C-2-9-15 located in the NW 1/4 NE 1/4 Section 2, T9S, R15E, Duchesen County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.4 miles \pm to the junction of this highway and UT State Hwy 53; proceed southwesterly - 6.4 miles \pm to it's junction with an existing road to the southwest; proceed southwesterly - 2.4 miles \pm to it's junction with an existing road to the southwest; proceed southwesterly - 0.8 miles \pm to it's junction with an existing road to the southeast; proceed southeasterly - 1.6 miles \pm to it's junction with an existing road to the southwest; proceed southwesterly - 1.2 miles \pm to it's junction with an existing road to the northwest; proceed northwesterly - 0.4 miles \pm to it's junction with an existing road to the east; proceed in a northeasterly direction - 0.2 miles \pm to the existing 2-2-9-15 well pad.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

There is no proposed access road for this location. The proposed well will be drilled directionaly off of the existing 2-2-9-15 well pad. See attached **Topographic Map "B"**.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District
Water Right : 43-10136

Maurice Harvey Pond
Water Right: 47-1358

Neil Moon Pond
Water Right: 43-11787

Newfield Collector Well
Water Right: 47-1817 (A30414DVA, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

8. **ANCILLARY FACILITIES**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT**

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP** – State of Utah.

11. **OTHER ADDITIONAL INFORMATION :**

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. State of Utah Antiquities Project Permit #U-03-MQ-0751b,s 11/18/03, prepared by Montgomery Archaeological Consultants. Paleontological Resource Survey prepared by, Wade E. Miller, 7/28/03. See attached report cover pages, Exhibit "D".

Newfield Production Company requests 976' of buried water line to be granted for the proposed GMBU C-2-9-15.

It is proposed that the disturbed area will be 30' wide to allow for construction of the proposed buried 10" steel water injection line and a buried 3" poly water return line. The proposed buried water lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."** The proposed water pipelines will be buried in a 4-5' deep trench constructed with a trencher or backhoe for the length of the proposal. The equipment will run on the surface and not be flat bladed to minimize surface impacts to precious topsoil in these High Desert environments. If possible, all proposed surface gas pipelines will be installed on the same side of the road as existing gas lines. The construction phase of the proposed water lines will last approximately (5) days.

In the event that the proposed well is converted to a water injection well, a Sundry Notice 3160-5 form will be applied for through the State of Utah DOGM Office.

- a) Newfield Production Company is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, Newfield is to immediately stop work that might further disturb such materials and contact the Authorized Officer.
- b) Newfield Production will control noxious weeds along rights-of-way for roads, pipelines, well sites or other applicable facilities. On State administered land it is required that a Pesticide Use Proposal shall be submitted and given approval prior to the application of herbicides or other possible hazardous chemicals.
- c) Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on State Lands after the conclusion of drilling operations or at any other time without State authorization. However, if State authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

Water Disposal

After first production, if the production water meets quality guidelines, it will be transported to the Ashley, Monument Butte, Jonah, South Wells Draw and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project. Water not meeting quality criteria, will be disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), Federally approved surface disposal facilities or at a State of Utah approved surface disposal facilities.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the GMBU C-2-9-15, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the GMBU C-2-9-15, Newfield will use, produce,

store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative

Name: Tim Eaton
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification


Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #C-2-9-15, Section 2, Township 9S, Range 15E: Lease ML-43538 Duchesne County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #B001834.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

9/14/11
Date

Mandie Crozier
Regulatory Analyst
Newfield Production Company

Typical 2M BOP stack configuration

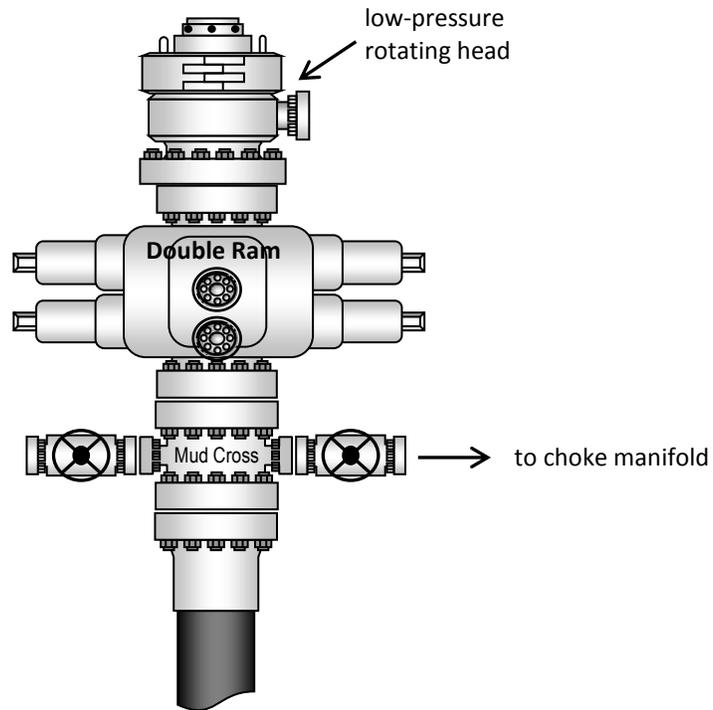


NEWFIELD EXPLORATION COMPANY

WELL PAD INTERFERENCE PLAT

- 2-2-9-15 (Existing Well)
- C-2-9-15 (Proposed Well)
- B-2-9-15 (Proposed Well)

Pad Location: NWNE (Lot 2) Section 2, T9S, R15E, S.L.B.&M.




BOTTOM HOLE FOOTAGES

C-2-9-15 (PROPOSED)	80' FNL & 2635' FEL
B-2-9-15 (PROPOSED)	80' FNL & 1180' FEL

TOP HOLE FOOTAGES

C-2-9-15 (PROPOSED)	655' FNL & 2635' FEL
B-2-9-15 (PROPOSED)	641' FNL & 1945' FEL

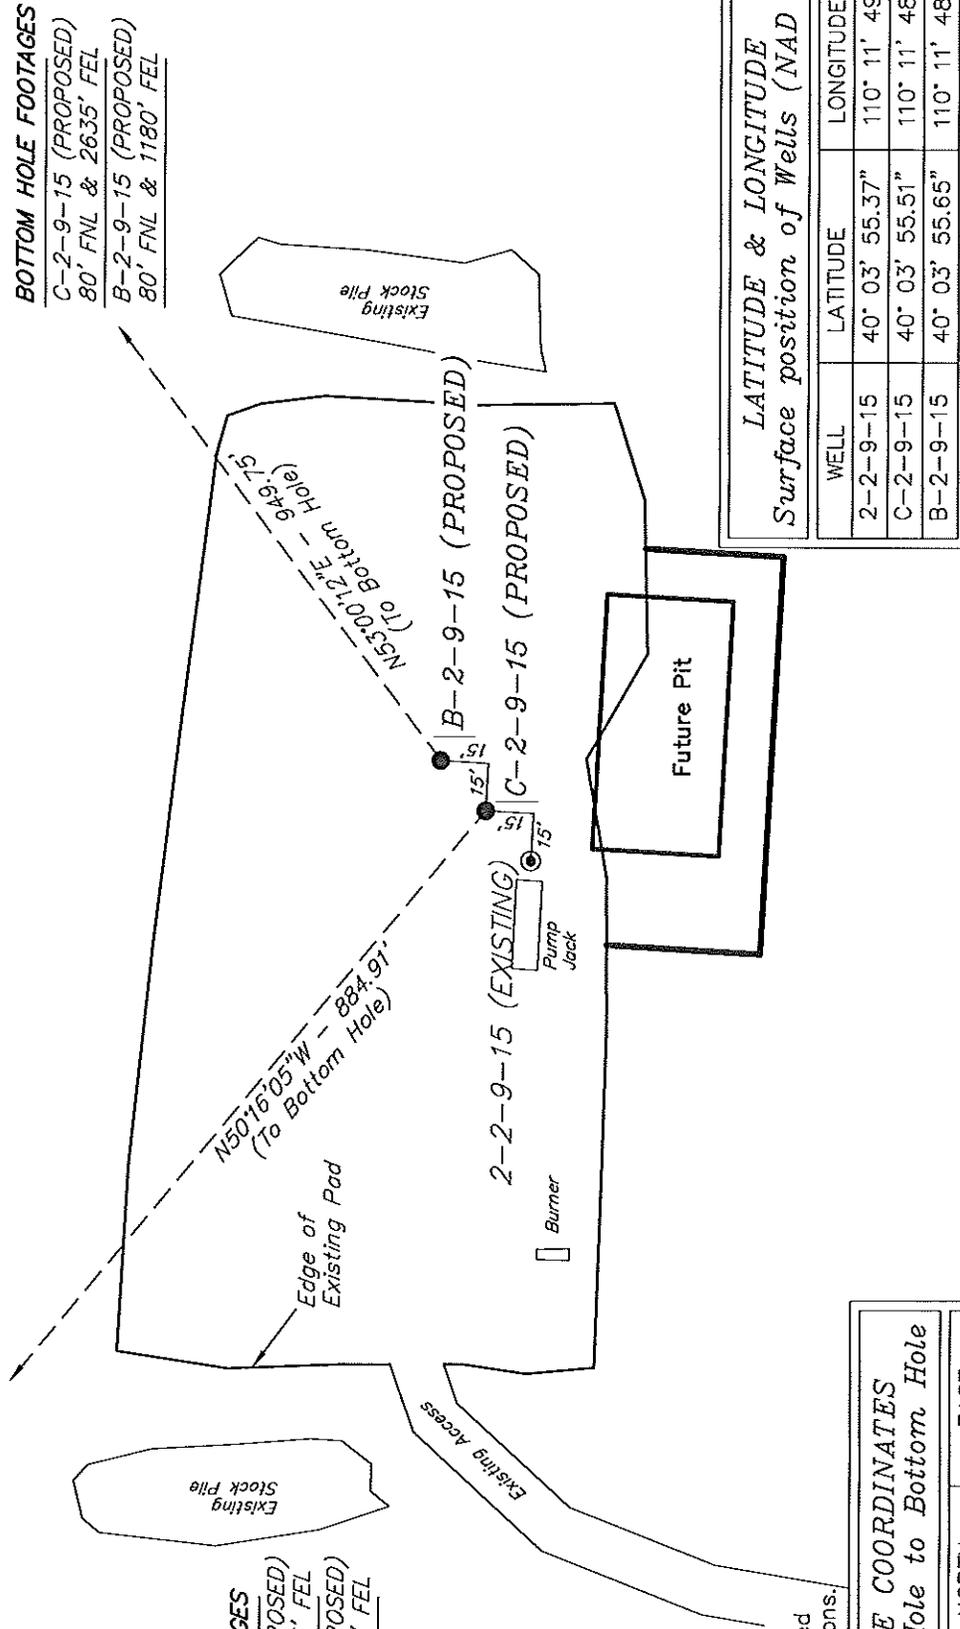

Note:
Bearings are based on GPS Observations.

RELATIVE COORDINATES
From Top Hole to Bottom Hole

WELL	NORTH	EAST
C-2-9-15	566'	-680'
B-2-9-15	572'	759'

LATITUDE & LONGITUDE
Surface position of Wells (NAD 83)

WELL	LATITUDE	LONGITUDE
2-2-9-15	40° 03' 55.37"	110° 11' 49.11"
C-2-9-15	40° 03' 55.51"	110° 11' 48.91"
B-2-9-15	40° 03' 55.65"	110° 11' 48.70"

SURVEYED BY: S.V.	DATE SURVEYED: 02-26-11	VERSION: V1
DRAWN BY: M.W.	DATE DRAWN: 06-08-11	
SCALE: 1" = 60'	REVISED:	

Tri State Land Surveying, Inc.
(435) 781-2507
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD EXPLORATION COMPANY


LOCATION LAYOUT

2-2-9-15 (Proposed Well)

C-2-9-15 (Proposed Well)

B-2-9-15 (Proposed Well)

Pad Location: NWNE Section 2, T9S, R15E, S.L.B.&M.

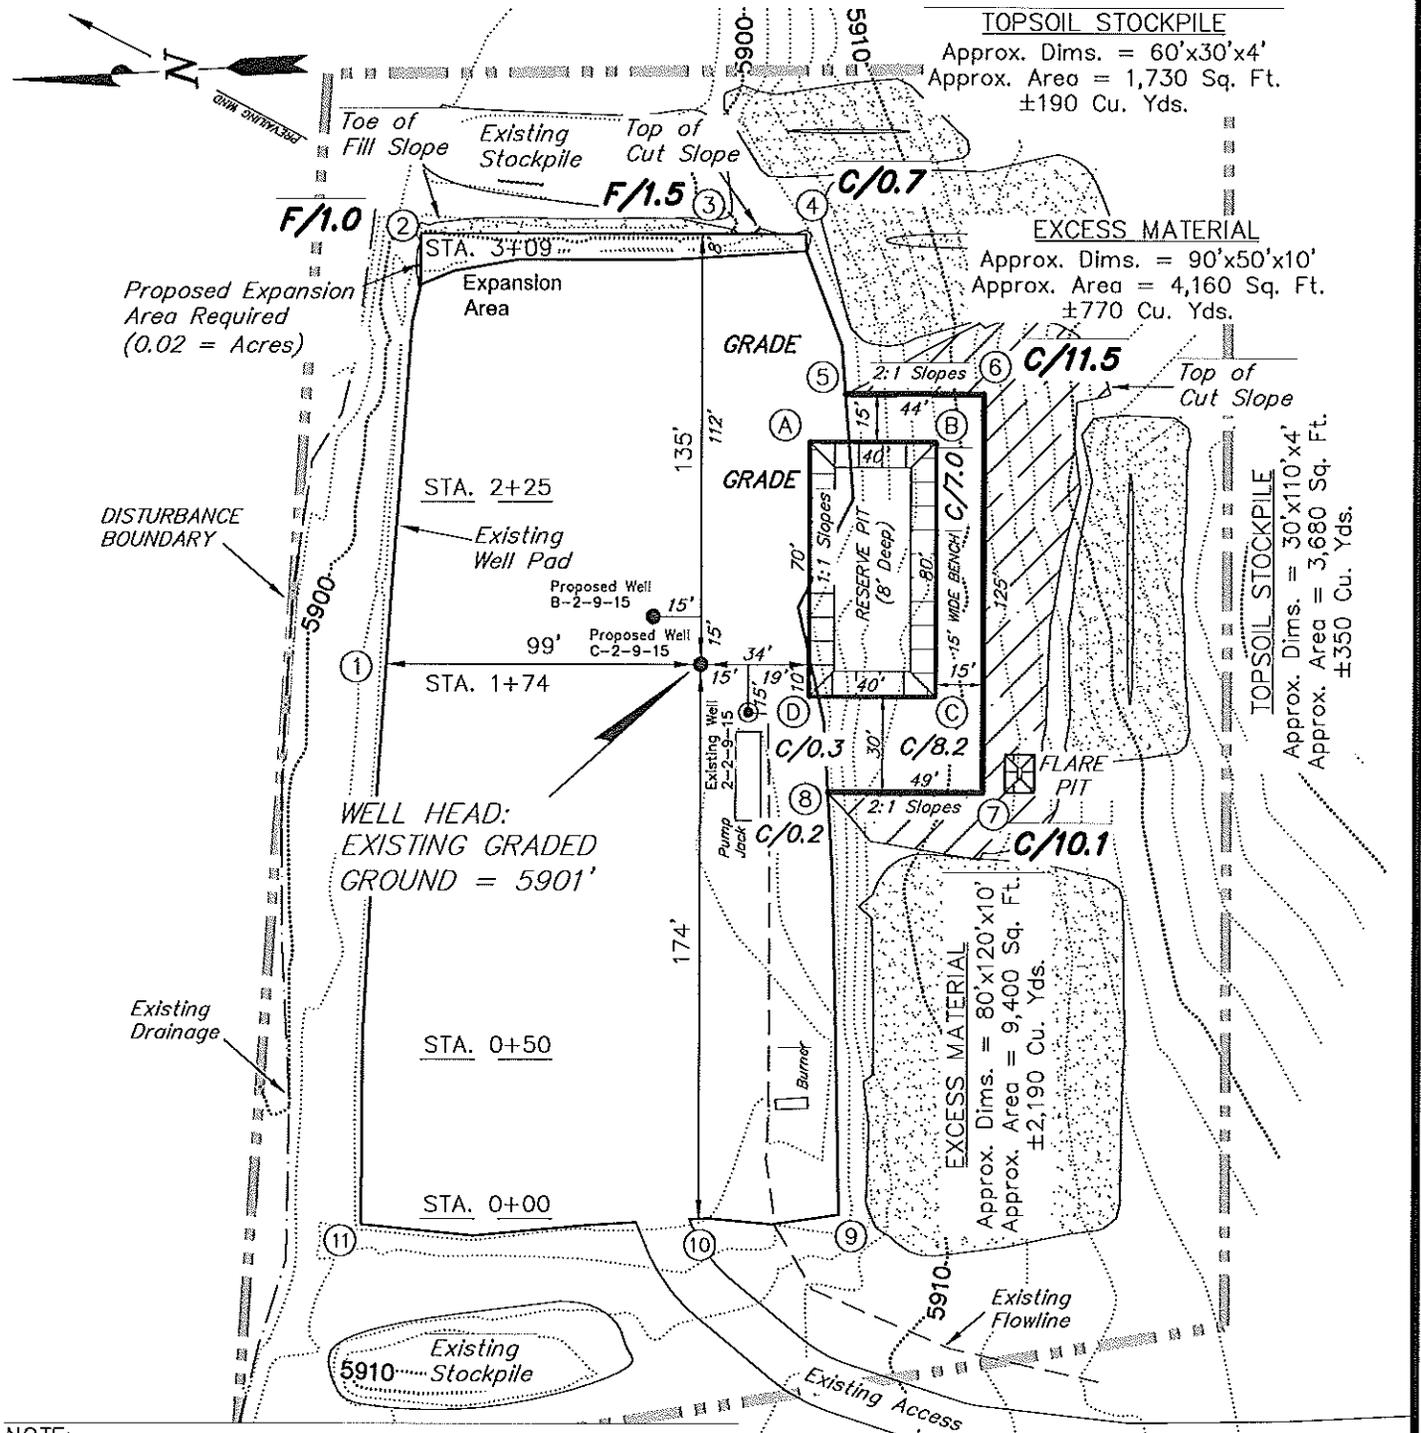

NOTE:
The topsoil & excess material areas are calculated as being mounds containing 3,500 cubic yards of dirt (a 10% fluff factor is included). The mound areas are calculated with push slopes of 1.5:1 & fall slopes of 1.5:1.

Note:
Topsoil to be Stripped From All New Construction Areas and Proposed Stock Pile Locations

SURVEYED BY: S.V.	DATE SURVEYED: 02-26-11	VERSION:
DRAWN BY: M.W.	DATE DRAWN: 08-03-11	V1
SCALE: 1" = 60'	REVISED:	

Tri State Land Surveying, Inc. (435) 781-2501
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD EXPLORATION COMPANY





CROSS SECTIONS

2-2-9-15 (Proposed Well)

C-2-9-15 (Proposed Well)

B-2-9-15 (Proposed Well)

Pad Location: NWNE Section 2, T9S, R15E, S.L.B.&M.

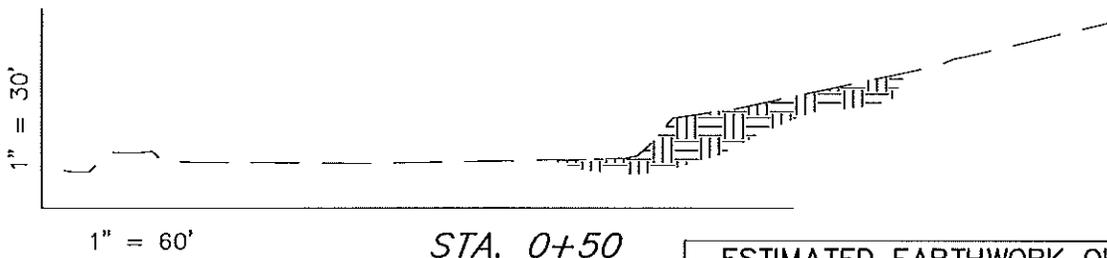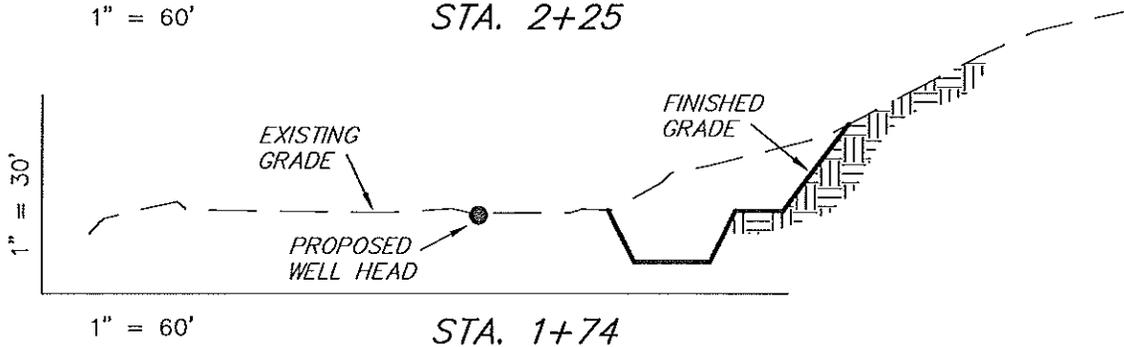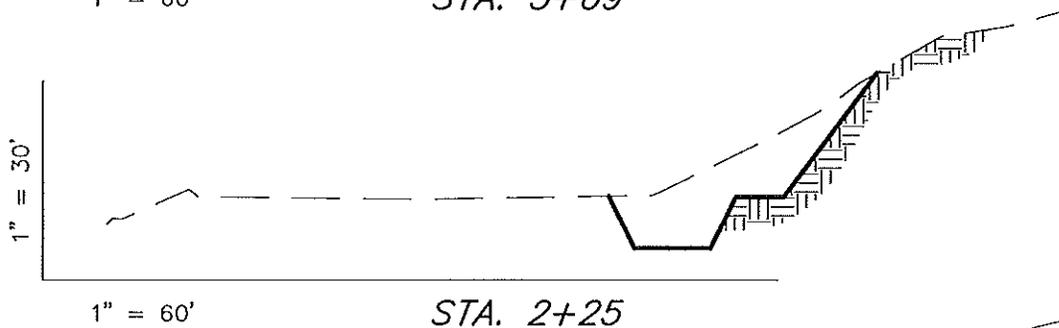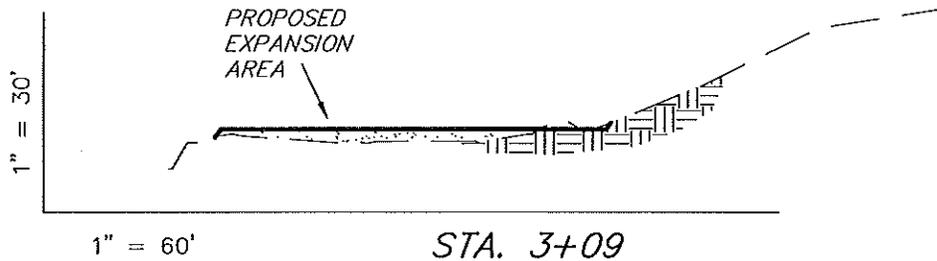

ESTIMATED EARTHWORK QUANTITIES
(No Shrink or swell adjustments have been used)
(Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	2,030	30	Topsoil is not included in Pad Cut	2,000
PIT	690	0		690
TOTALS	2,720	30	490	2,690

NOTE:
UNLESS OTHERWISE
NOTED ALL CUT/FILL
SLOPES ARE AT 1.5:1

SURVEYED BY: S.V.	DATE SURVEYED: 02-26-11	VERSION: V1
DRAWN BY: M.W.	DATE DRAWN: 08-03-11	
SCALE: 1" = 60'	REVISED:	

Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078



VIA ELECTRONIC DELIVERY

September 15, 2011

State of Utah, Division of Oil, Gas and Mining
ATTN: Diana Mason
P.O. Box 145801
Salt Lake City, UT 84114-5801

RE: Directional Drilling
GMBU C-2-9-15
Greater Monument Butte (Green River) Unit

Surface Hole: T9S-R15E Section 2: NWNE (ML-43538)
655' FNL 1961' FEL

At Target: T9S-R15E Section 2: NWNE (ML-43538)
80' FNL 2635' FEL

Duchesne County, Utah

Dear Ms. Mason:

Pursuant to the filing by Newfield Production Company ("NPC") of an Application for Permit to Drill the above referenced well dated 9/14/2011, a copy of which is attached, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole and target locations of this well are both within the boundaries of the Greater Monument Butte Unit (UTU-87538X), of which Newfield certifies that it is the operator. Further, Newfield certifies that all lands within 460 feet of the entire directional well bore are within the Greater Monument Butte Unit.

NPC is permitting this well as a directional well in order to mitigate surface disturbance by utilizing pre-existing roads and pipelines.

NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please contact the undersigned at 303-383-4153 or by email at pburns@newfield.com. Your consideration in this matter is greatly appreciated.

Sincerely,
Newfield Production Company


A handwritten signature in blue ink, appearing to read "PB", written over a light blue horizontal line.

Peter Burns
Land Associate

API Well Number:

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS AND MINING							FORM 3				
							AMENDED REPORT <input type="checkbox"/>				
APPLICATION FOR PERMIT TO DRILL						1. WELL NAME and NUMBER GMBU C-2-9-15					
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>						3. FIELD OR WILDCAT MONUMENT BUTTE					
4. TYPE OF WELL Oil Well Coalbed Methane Well: NO						5. UNIT or COMMUNITIZATION AGREEMENT NAME GMBU (GRRV)					
6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY						7. OPERATOR PHONE 435 646-4825					
8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Mytan, UT, 84052						9. OPERATOR E-MAIL mcrozler@newfield.com					
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) ml-43538			11. MINERAL OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>			12. SURFACE OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>					
13. NAME OF SURFACE OWNER (if box 12 = 'fee')						14. SURFACE OWNER PHONE (if box 12 = 'fee')					
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')						16. SURFACE OWNER E-MAIL (if box 12 = 'fee')					
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')			18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>			19. SLANT VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>					
20. LOCATION OF WELL		FOOTAGES		QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN			
LOCATION AT SURFACE		655 FNL 1961 FEL		NWNE	2	9.0 S	15.0 E	S			
Top of Uppermost Producing Zone		366 FNL 2309 FEL		NWNE	2	9.0 S	15.0 E	S			
At Total Depth		80 FNL 2635 FEL		NWNE	2	9.0 S	15.0 E	S			
21. COUNTY DUCHESENE			22. DISTANCE TO NEAREST LEASE LINE (Feet) 90			23. NUMBER OF ACRES IN DRILLING UNIT 20					
			25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 1455			26. PROPOSED DEPTH MD: 6371 TVD: 6300					
27. ELEVATION - GROUND LEVEL 5901			28. BOND NUMBER B001834			29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 437478					
Hole, Casing, and Cement Information											
String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement		Sacks	Yield	Weight
Surf	12.25	8.625	0 - 300	24.0	J-55 ST&C	8.3	Class G		138	1.17	15.8
Prod	7.875	5.5	0 - 6371	15.5	J-55 ST&C	8.3	Premium Lite High Strength		302	3.26	11.0
							50/50 Poz		363	1.24	14.3
ATTACHMENTS											
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES											
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER					<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN						
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)					<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER						
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)					<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP						
NAME Mandie Crozler			TITLE Regulatory Tech			PHONE 435 646-4825					
SIGNATURE			DATE			EMAIL mcrozler@newfield.com					
API NUMBER ASSIGNED			APPROVAL								

Received: September 14, 2011

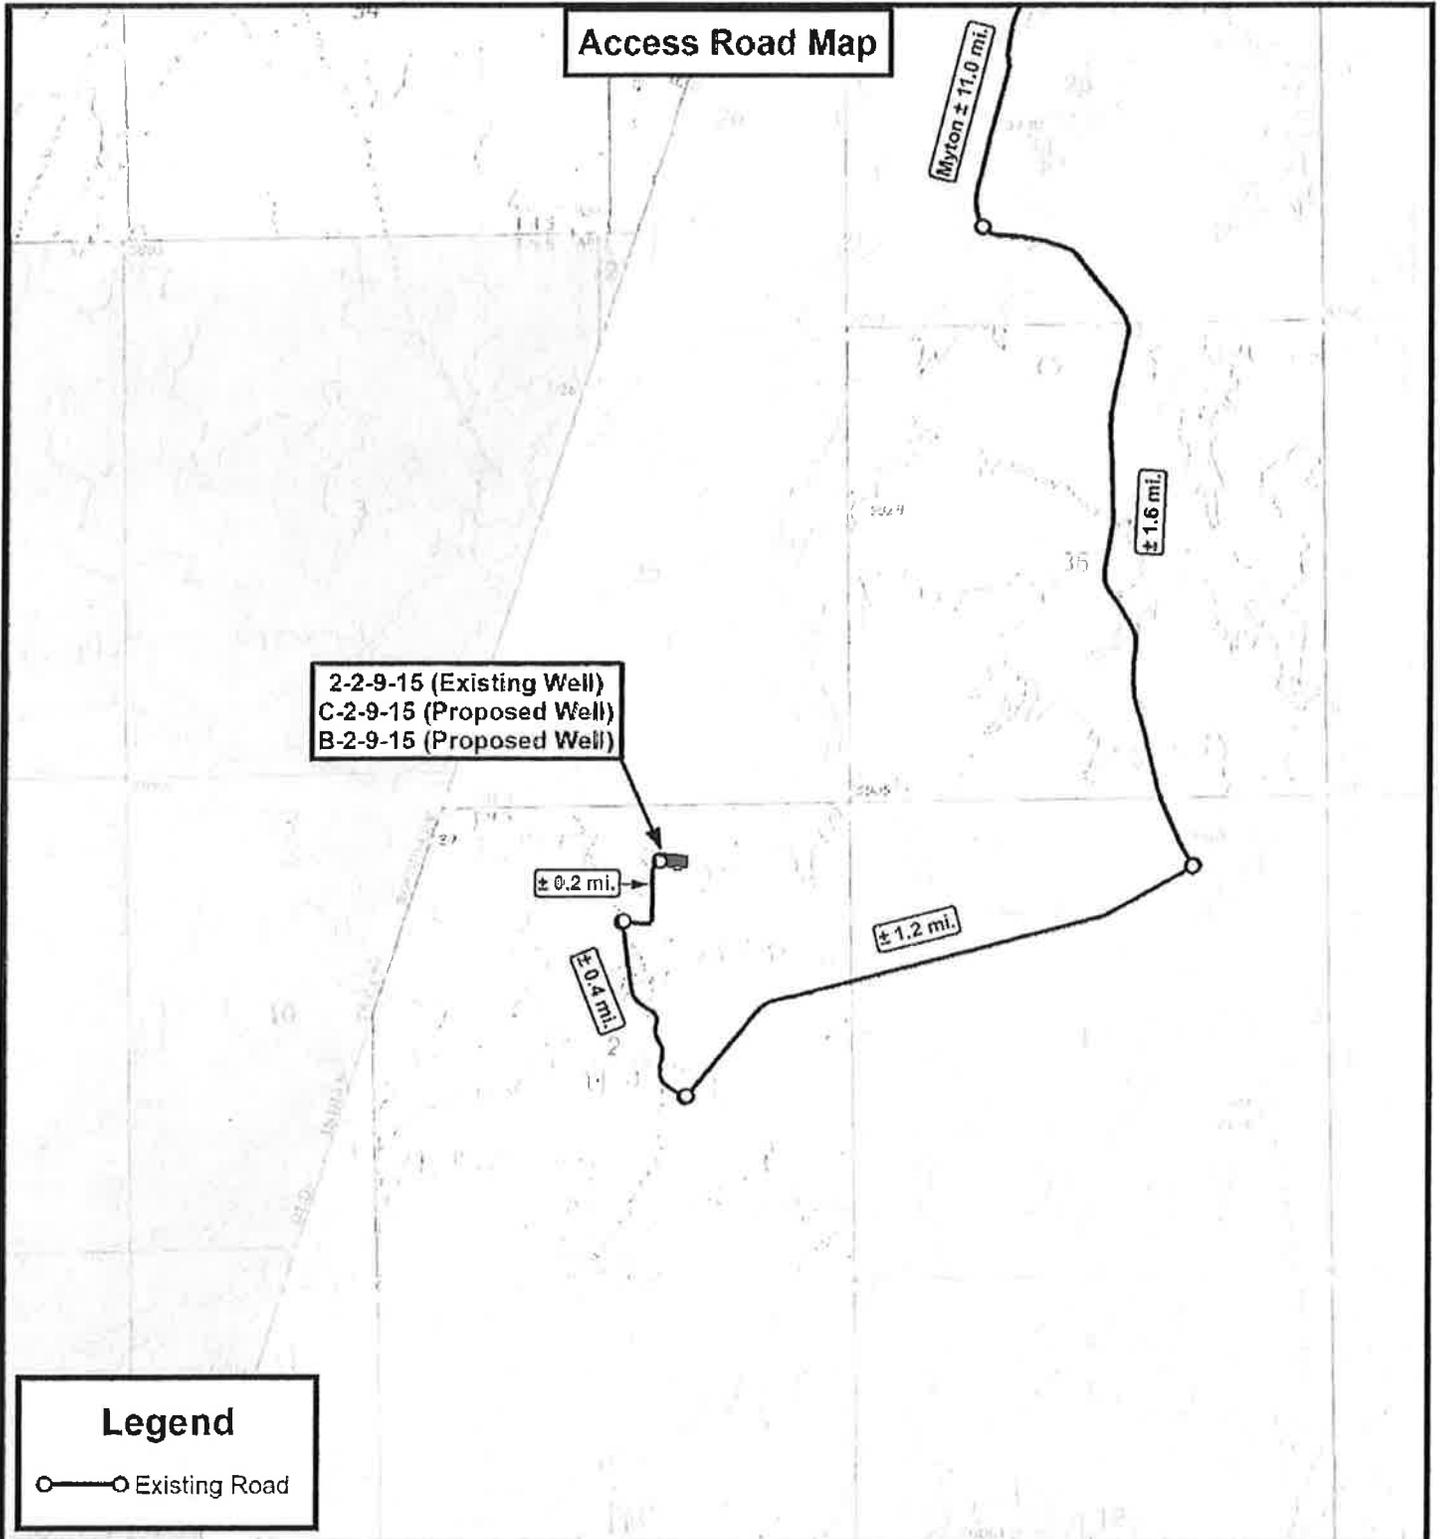

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518

DRAWN BY:	C.H.M.	REVISED:	VERSION:
DATE:	08-08-2011		V1
SCALE:	1" = 2,000'		



NEWFIELD EXPLORATION COMPANY

2-2-9-15 (Existing Well)
C-2-9-15 (Proposed Well)
B-2-9-15 (Proposed Well)



SEC. 2, T9S, R15E, S.L.B.&M. Duchesne County, UT.

TOPOGRAPHIC MAP SHEET **B**

API Number: 4301350971
Well Name: GMBU C-2-9-15
 Township T0.9 . Range R1.5 . Section 22
 Meridian: SLBM
 Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared:
 Map Produced by Diana Mason

Units	Wells Query Status
ACTIVE	APD - Approved Permit
EXPLORATORY	DRL - Spudded (Drilling Commenced)
GAS STORAGE	GIW - Gas Injection
NF PP OIL	GS - Gas Storage
NF SECONDARY	LA - Location Abandoned
PI OIL	LOC - New Location
PP GAS	OPS - Operation Suspended
PP GEOTHERM	PA - Plugged Abandoned
PP OIL	PGW - Producing Gas Well
SECONDARY	POW - Producing Oil Well
TERMINATED	RET - Returned APD
Unknown	SGW - Shut-in Gas Well
ABANDONED	SOW - Shut-in Oil Well
ACTIVE	TA - Temp. Abandoned
COMBINED	TW - Test Well
INACTIVE	WDW - Water Disposal
STORAGE	WIW - Water Injection Well
TERMINATED	WSW - Water Supply Well
Sections	
Township	

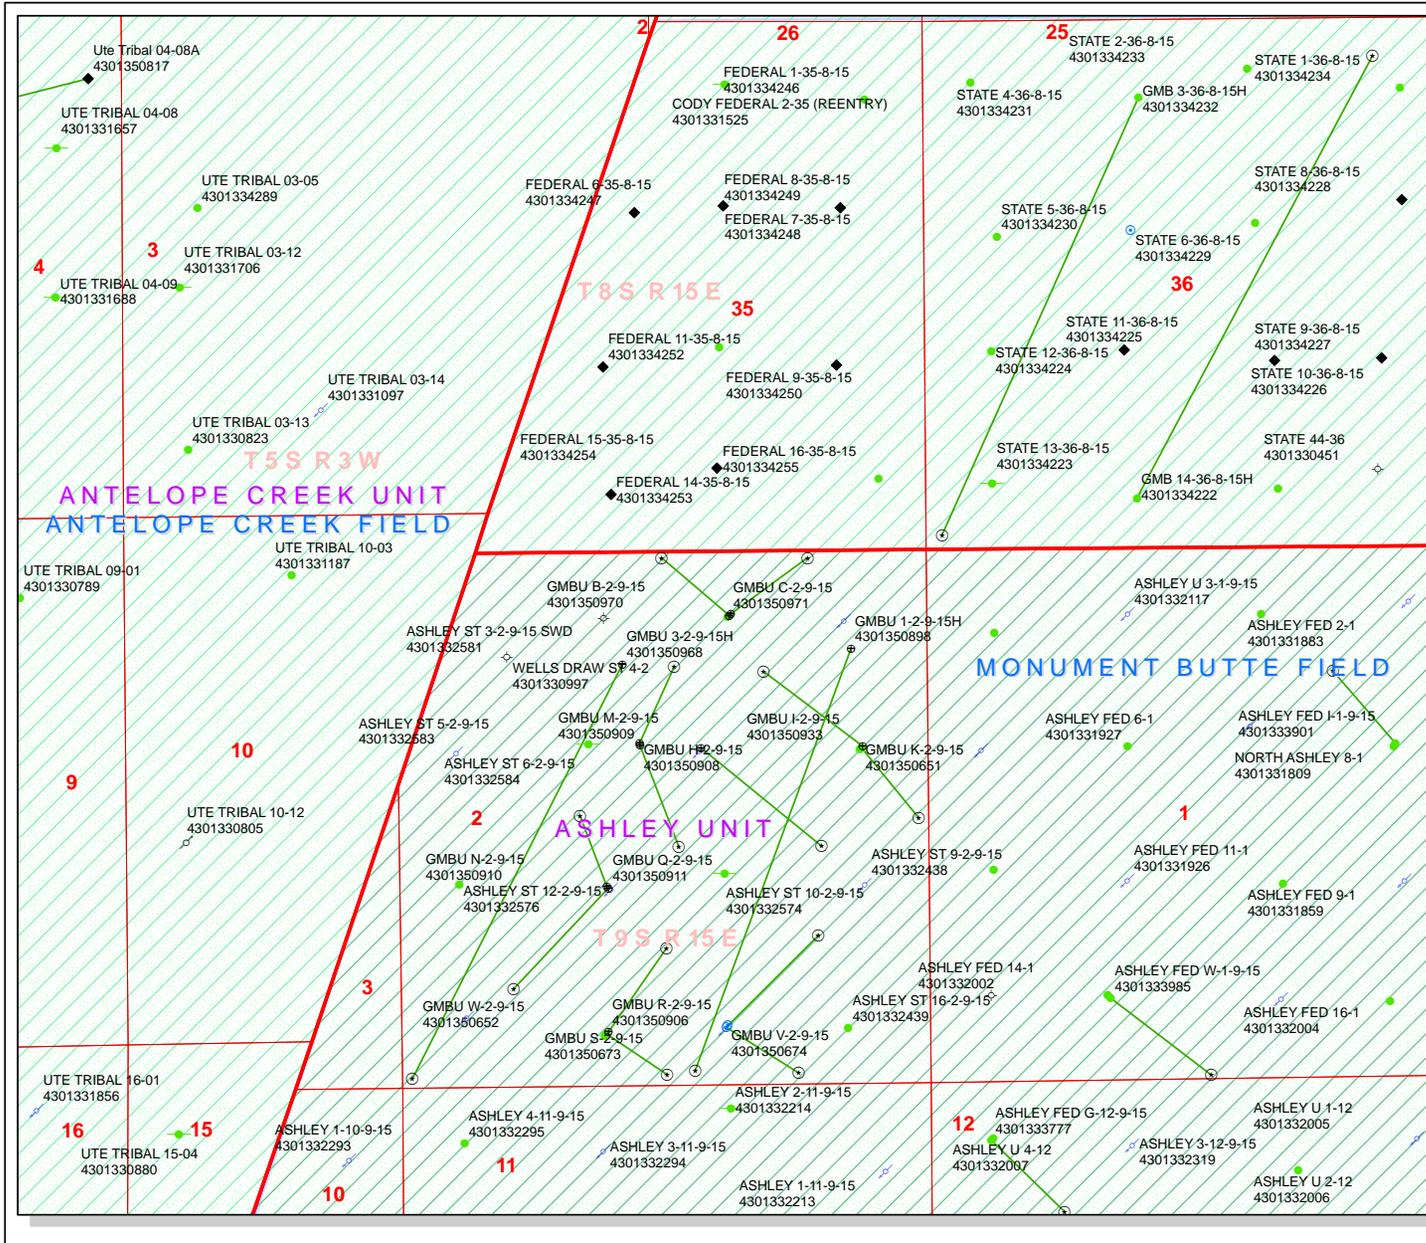

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

September 16, 2011

Memorandum

To: Assistant District Manager Minerals, Vernal District
From: Michael Coulthard, Petroleum Engineer
Subject: 2011 Plan of Development Greater Monument
Butte Unit, Duchesne and Uintah Counties,
Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2011 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

API#	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-50957	GMBU 2-32-8-16H	Sec 32 T08S R16E 0274 FNL 1529 FEL
	Lateral 1	Sec 32 T08S R16E 0090 FSL 1500 FWL
43-013-50958	GMBU 1A-36-8-16H	Sec 36 T08S R16E 0957 FNL 0256 FEL
	Lateral 1	Sec 36 T08S R16E 0160 FSL 2100 FEL
43-013-50959	GMBU 1-16-9-17H	Sec 16 T09S R17E 1037 FNL 0406 FEL
	Lateral 1	Sec 16 T09S R17E 0100 FSL 2600 FEL
43-013-50960	GMBU 1A-32-8-17H	Sec 32 T08S R17E 0797 FNL 0863 FEL
	Lateral 1	Sec 32 T08S R17E 0220 FSL 2420 FWL
43-013-50967	GMBU 3-32-8-17H	Sec 32 T08S R17E 1010 FNL 1735 FWL
	Lateral 1	Sec 32 T08S R17E 0100 FSL 0100 FWL
43-013-50968	GMBU 3-2-9-15H	Sec 02 T09S R15E 1107 FNL 1468 FWL
	Lateral 1	Sec 02 T09S R15E 0100 FSL 0100 FWL
43-013-50970	GMBU B-2-9-15	Sec 02 T09S R15E 0641 FNL 1945 FEL
	BHL	Sec 02 T09S R15E 0080 FNL 1180 FEL

RECEIVED: September 16, 2011

API#	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-50971	GMBU C-2-9-15	Sec 02 T09S R15E 0655 FNL 1961 FEL BHL Sec 02 T09S R15E 0080 FNL 2635 FEL
43-013-50972	GMBU W-16-9-17	Sec 16 T09S R17E 0582 FSL 1940 FEL BHL Sec 16 T09S R17E 0080 FSL 2623 FEL
43-047-52011	GMBU 1-36T-8-17H	Sec 36 T08S R17E 0646 FNL 0957 FEL Lateral 1 Sec 36 T08S R17E 0130 FSL 2435 FWL

This office has no objection to permitting the wells at this time.

Michael L. Coulthard

Digitally signed by Michael L. Coulthard
DN: cn=Michael L. Coulthard, o=Bureau of Land Management,
ou=Branch of Minerals, email=Michael_Coulthard@blm.gov,
c=US
Date: 2011.09.16 15:48:58 -06'00'

bcc: File - Greater Monument Butte Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:9-16-11

RECEIVED: September 16, 2011

From: Jim Davis
To: Hill, Brad; Mason, Diana
CC: Bonner, Ed; Garrison, LaVonne; mcrozier@newfield.com
Date: 10/27/2011 7:48 AM
Subject: Newfield Well approvals

The following APDs have been approved by SITLA including arch and paleo clearance.

GMBU 1-16-9-17H (4301350959)
GMBU 1A-36-8-16H (4301350958)
GMBU 2-32-8-16H (4301350957)
GMBU 3-2-9-15H (4301350968)
GMBU 3-32-8-17H (4301350967)
GMBU B-2-9-15 (4301350970)
GMBU C-2-9-15 (4301350971)

Thanks.
-Jim

Jim Davis
Utah Trust Lands Administration
jimdavis1@utah.gov
Phone: (801) 538-5156

From: Jim Davis
To: Hill, Brad; Mason, Diana
CC: Bonner, Ed; Garrison, LaVonne; mcrozier@newfield.com
Date: 10/27/2011 7:48 AM
Subject: Newfield Well approvals

The following APDs have been approved by SITLA including arch and paleo clearance.

GMBU 1-16-9-17H (4301350959)
GMBU 1A-36-8-16H (4301350958)
GMBU 2-32-8-16H (4301350957)
GMBU 3-2-9-15H (4301350968)
GMBU 3-32-8-17H (4301350967)
GMBU B-2-9-15 (4301350970)
GMBU C-2-9-15 (4301350971)

Thanks.
-Jim

Jim Davis
Utah Trust Lands Administration
jimdavis1@utah.gov
Phone: (801) 538-5156

Well Name	NEWFIELD PRODUCTION COMPANY GMBU C-2-9-15 43013			
String	Surf	Prod		
Casing Size(")	8.625	5.500		
Setting Depth (TVD)	300	6300		
Previous Shoe Setting Depth (TVD)	0	300		
Max Mud Weight (ppg)	8.3	8.4		
BOPE Proposed (psi)	500	2000		
Casing Internal Yield (psi)	2950	4810		
Operators Max Anticipated Pressure (psi)	2728	8.3		

Calculations	Surf String	8.625	"
Max BHP (psi)	.052*Setting Depth*MW=	129	
			BOPE Adequate For Drilling And Setting Casing at Depth?
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=	93	YES <input type="checkbox"/> air drill
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=	63	YES <input type="checkbox"/> OK
			*Can Full Expected Pressure Be Held At Previous Shoe?
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=	63	NO <input type="checkbox"/> OK
Required Casing/BOPE Test Pressure=		300	psi
*Max Pressure Allowed @ Previous Casing Shoe=		0	psi *Assumes 1psi/ft frac gradient

Calculations	Prod String	5.500	"
Max BHP (psi)	.052*Setting Depth*MW=	2752	
			BOPE Adequate For Drilling And Setting Casing at Depth?
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=	1996	YES <input type="checkbox"/>
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=	1366	YES <input type="checkbox"/> OK
			*Can Full Expected Pressure Be Held At Previous Shoe?
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=	1432	NO <input type="checkbox"/> Reasonable for area
Required Casing/BOPE Test Pressure=		2000	psi
*Max Pressure Allowed @ Previous Casing Shoe=		300	psi *Assumes 1psi/ft frac gradient

Calculations	String		"
Max BHP (psi)	.052*Setting Depth*MW=		
			BOPE Adequate For Drilling And Setting Casing at Depth?
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=		NO <input type="checkbox"/>
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=		NO <input type="checkbox"/>
			*Can Full Expected Pressure Be Held At Previous Shoe?
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=		NO <input type="checkbox"/>
Required Casing/BOPE Test Pressure=			psi
*Max Pressure Allowed @ Previous Casing Shoe=			psi *Assumes 1psi/ft frac gradient

Calculations	String		"
Max BHP (psi)	.052*Setting Depth*MW=		
			BOPE Adequate For Drilling And Setting Casing at Depth?
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=		NO <input type="checkbox"/>
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=		NO <input type="checkbox"/>
			*Can Full Expected Pressure Be Held At Previous Shoe?
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=		NO <input type="checkbox"/>
Required Casing/BOPE Test Pressure=			psi


API Well Number: 43013509710000

*Max Pressure Allowed @ Previous Casing Shoe=

psi *Assumes 1psi/ft frac gradient

43013509710000 GMBU C-2-9-15

Casing Schematic

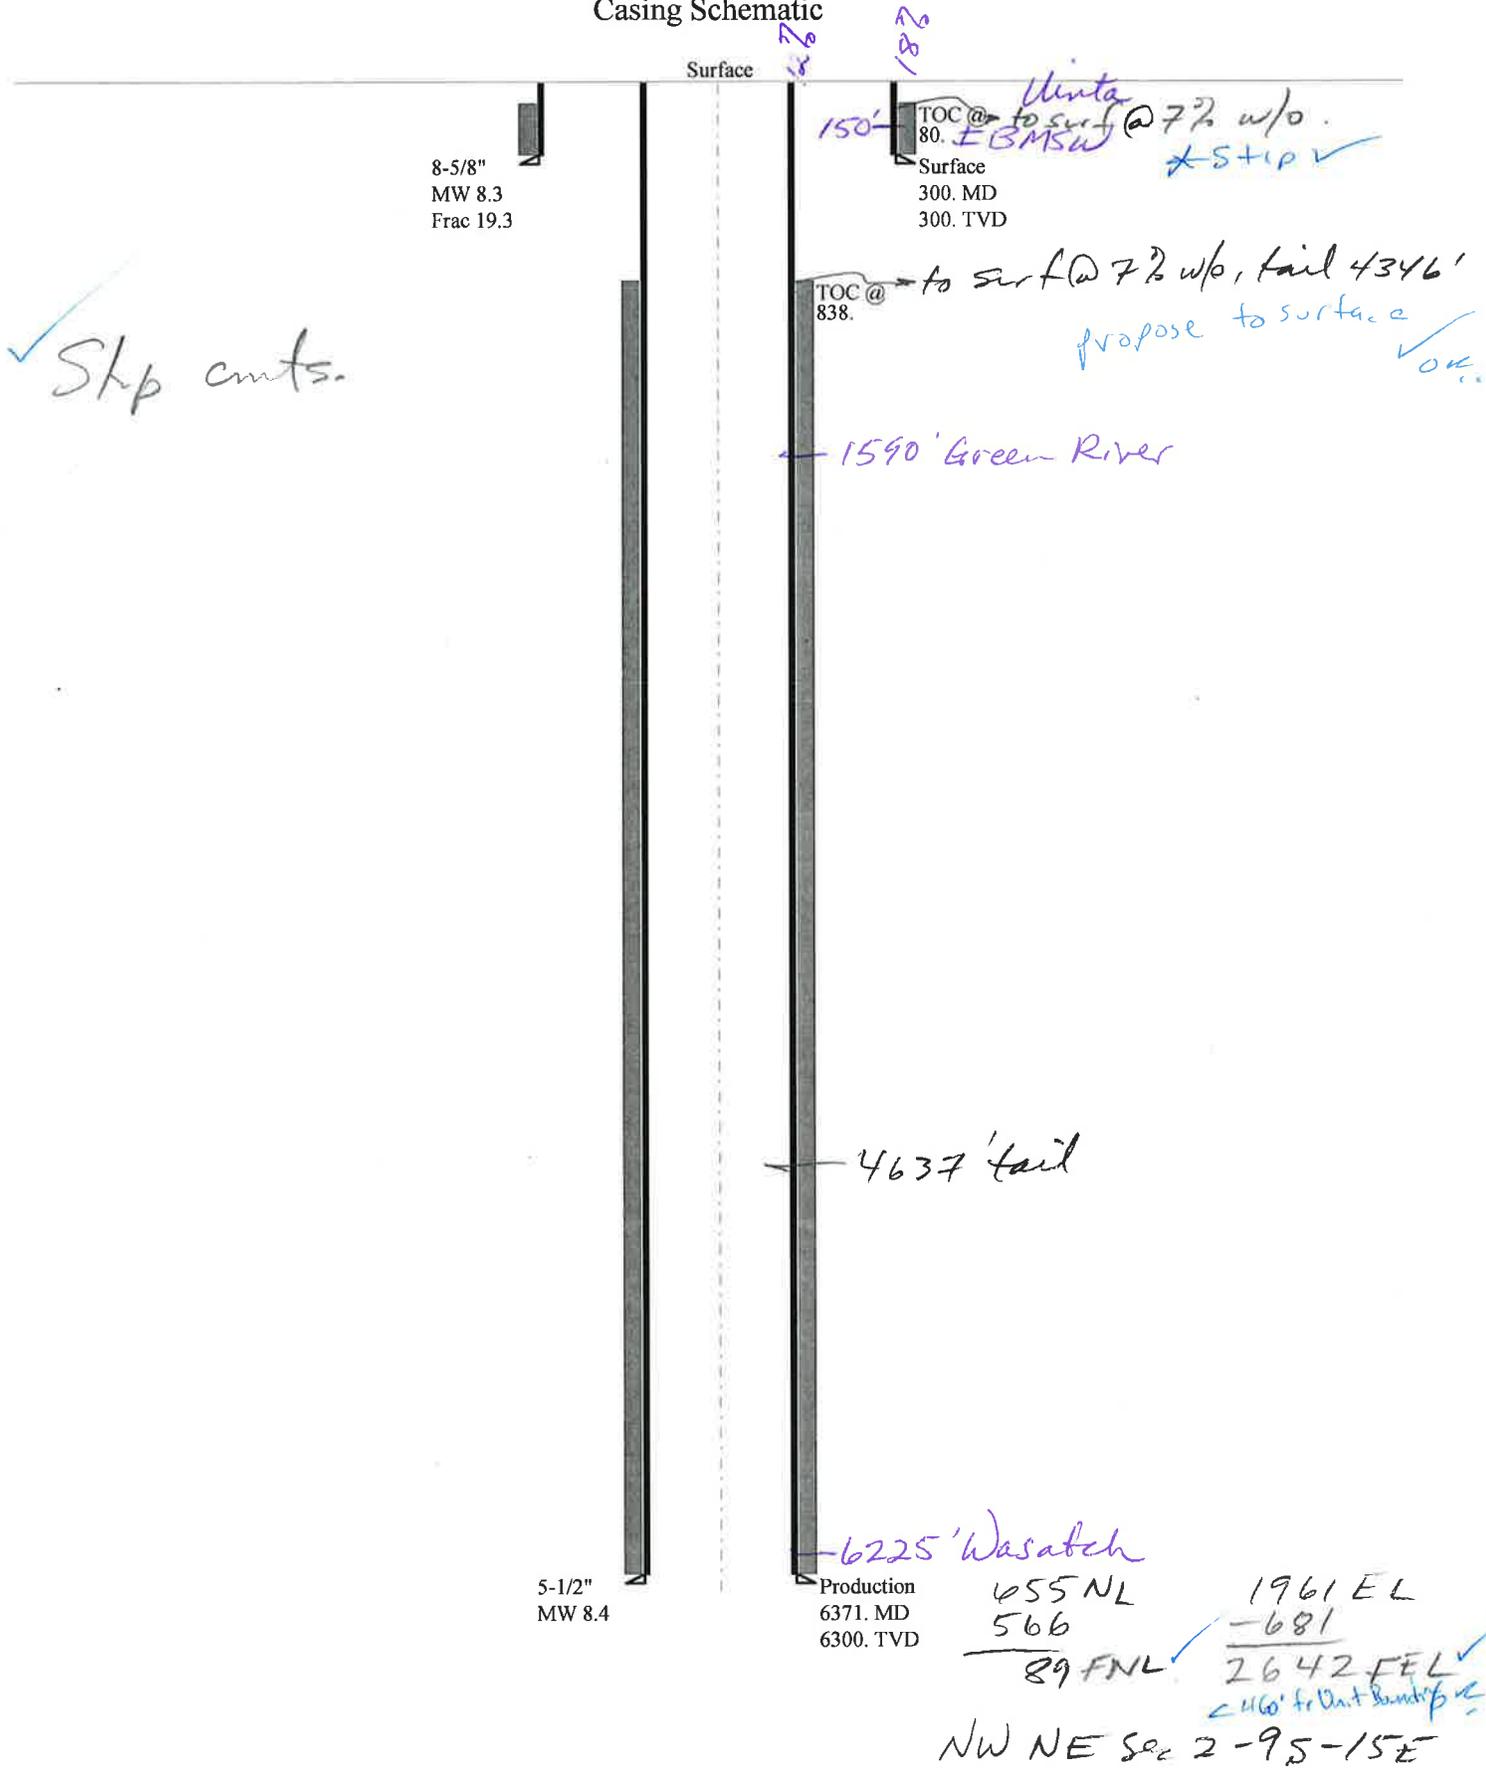

Well name:	43013509710000 GMBU C-2-9-15		
Operator:	NEWFIELD PRODUCTION COMPANY		
String type:	Surface	Project ID:	43-013-50971
Location:	DUCHESNE COUNTY		

Design parameters:

Collapse

Mud weight: 8.330 ppg
 Design is based on evacuated pipe.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No
 Surface temperature: 74 °F
 Bottom hole temperature: 78 °F
 Temperature gradient: 1.40 °F/100ft
 Minimum section length: 100 ft

Cement top: 80 ft

Burst

Max anticipated surface pressure: 264 psi
 Internal gradient: 0.120 psi/ft
 Calculated BHP 300 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
 8 Round LTC: 1.70 (J)
 Buttress: 1.60 (J)
 Premium: 1.50 (J)
 Body yield: 1.50 (B)

Tension is based on air weight.
 Neutral point: 262 ft

Non-directional string.

Re subsequent strings:

Next setting depth: 6,300 ft
 Next mud weight: 8.400 ppg
 Next setting BHP: 2,749 psi
 Fracture mud wt: 19.250 ppg
 Fracture depth: 300 ft
 Injection pressure: 300 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost (\$)
1	300	8.625	24.00	J-55	ST&C	300	300	7.972	1544
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	130	1370	10.557	300	2950	9.83	7.2	244	33.90 J

Prepared by: Helen Sadik-Macdonald
 Div of Oil, Gas & Mining

Phone: 801 538-5357
 FAX: 801-359-3940

Date: December 15, 2011
 Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 300 ft, a mud weight of 8.33 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	43013509710000 GMBU C-2-9-15		
Operator:	NEWFIELD PRODUCTION COMPANY		
String type:	Production	Project ID:	43-013-50971
Location:	DUCHESNE COUNTY		

Design parameters:

Collapse

Mud weight: 8.400 ppg
 Design is based on evacuated pipe.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No
 Surface temperature: 74 °F
 Bottom hole temperature: 162 °F
 Temperature gradient: 1.40 °F/100ft
 Minimum section length: 100 ft

Cement top: 838 ft

Burst

Max anticipated surface pressure: 1,363 psi
 Internal gradient: 0.220 psi/ft
 Calculated BHP 2,749 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
 8 Round LTC: 1.80 (J)
 Buttress: 1.60 (J)
 Premium: 1.50 (J)
 Body yield: 1.60 (B)

Directional Info - Build & Hold

Kick-off point 600 ft
 Departure at shoe: 885 ft
 Maximum dogleg: 1.5 °/100ft
 Inclination at shoe: 9.33 °

Tension is based on air weight.
 Neutral point: 5,560 ft

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost (\$)
1	6371	5.5	15.50	J-55	LT&C	6300	6371	4.825	22496
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	2749	4040	1.470	2749	4810	1.75	97.7	217	2.22 J

Prepared by: Helen Sadik-Macdonald
 Div of Oil, Gas & Mining

Phone: 801 538-5357
 FAX: 801-359-3940

Date: December 15, 2011
 Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 6300 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Collapse strength is (biaxially) derated for doglegs in directional wells by multiplying the tensile stress by the cross section area to calculate a

Engineering responsibility for use of this design will be that of the purchaser.

ON-SITE PREDRILL EVALUATION

Utah Division of Oil, Gas and Mining

Operator NEWFIELD PRODUCTION COMPANY
Well Name GMBU C-2-9-15
API Number 43013509710000 **APD No** 4651 **Field/Unit** MONUMENT BUTTE
Location: 1/4,1/4 NWNE **Sec** 2 **Tw** 9.0S **Rng** 15.0E 655 FNL 1961 FEL
GPS Coord (UTM) **Surface Owner**

Participants

M. Jones (UDOGM), T. Eaton (Newfield), B. Williams, A. Hansen (UDWR), Annie Smith (South Slope).

Regional/Local Setting & Topography

This location is staked approximately 15 miles southwest of Myton, Utah, just east of the old indian territory boundary and west of Wells Draw. Topography is slightly hilly terrain. This location is already built and has one well already in production on it. A very small amount of additional disturbance is being requested to extend the pad slightly.

Surface Use Plan

Current Surface Use

Grazing
Wildlife Habitat

New Road Miles	Well Pad	Src Const Material	Surface Formation
0	Width 133 Length 309	Onsite	

Ancillary Facilities

Waste Management Plan Adequate?

Environmental Parameters

Affected Floodplains and/or Wetlands N

Flora / Fauna

Existing well pad see presite report for the 2-2-9-15 well for additional details.

Soil Type and Characteristics

clay

Erosion Issues N

Sedimentation Issues N

Site Stability Issues N

Drainage Diversion Required? Y

Divert drainages around and away from well pad and access road.

Berm Required? Y

Berm location to prevent leaks and spills from leaving the confines of the pad.

Erosion Sedimentation Control Required? N

Paleo Survey Run? Y Paleo Potential Observed? N Cultural Survey Run? Y Cultural Resources? N

Reserve Pit

Site-Specific Factors

Site Ranking

Distance to Groundwater (feet)	>200	0	
Distance to Surface Water (feet)	>1000	0	
Dist. Nearest Municipal Well (ft)	>5280	0	
Distance to Other Wells (feet)		20	
Native Soil Type	Mod permeability	10	
Fluid Type	Fresh Water	5	
Drill Cuttings	Normal Rock	0	
Annual Precipitation (inches)	10 to 20	5	
Affected Populations			
Presence Nearby Utility Conduits	Not Present	0	
	Final Score	40	1 Sensitivity Level

Characteristics / Requirements

Dugout earthen (80 x 40 x 8) exterior to pad dimensions.

Closed Loop Mud Required? N Liner Required? Y Liner Thickness 16 Pit Underlayment Required? N

Other Observations / Comments

Mark Jones
Evaluator

9/28/2011
Date / Time

Application for Permit to Drill Statement of Basis

1/4/2012

Utah Division of Oil, Gas and Mining

Page 1

APD No	API WellNo	Status	Well Type	Surf Owner	CBM
4651	43013509710000	SITLA	OW	S	No
Operator	NEWFIELD PRODUCTION COMPANY		Surface Owner-APD		
Well Name	GMBU C-2-9-15		Unit	GMBU (GRRV)	
Field	MONUMENT BUTTE		Type of Work	DRILL	
Location	NWNE 2 9S 15E S 655 FNL 1961 FEL GPS Coord (UTM) 568474E 4435334N				

Geologic Statement of Basis

Newfield proposes to set 300 feet of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 150'. A search of Division of Water Rights records shows no water wells within a 10,000 foot radius of the center of Section 2. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water. The proposed casing and cement should adequately protect useable sources of underground water.

Brad Hill
APD Evaluator

11/1/2011
Date / Time

Surface Statement of Basis

This location is staked approximately 15 miles southwest of Myton, Utah, just east of the old indian territory boundary and west of Wells Draw. Topography is slightly hilly terrain. This location is already built and has one well already in production on it. A very small amount of additional disturbance is being requested to extend the pad slightly. Lower elevations of surrounding area create small drainages that will typically run water during storm events. The location should be bermed to prevent spills from leaving the confines of the pad. Fencing around the reserve pit will be necessary once the well is drilled to prevent wildlife and livestock from becoming a problem. Drainages should be diverted around and away from wellpad and access road. A synthetic liner of 16 mils (minimum) should be utilized in the reserve pit.

Mark Jones
Onsite Evaluator

9/28/2011
Date / Time

Conditions of Approval / Application for Permit to Drill

Category	Condition
Pits	A synthetic liner with a minimum thickness of 16 mils shall be properly installed and maintained in the reserve pit.
Surface	The well site shall be bermed to prevent fluids from leaving the pad.
Surface	Drainages adjacent to the proposed pad shall be diverted around the location.
Surface	The reserve pit shall be fenced upon completion of drilling operations.

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 9/14/2011

API NO. ASSIGNED: 43013509710000

WELL NAME: GMBU C-2-9-15

OPERATOR: NEWFIELD PRODUCTION COMPANY (N2695)

PHONE NUMBER: 435 646-4825

CONTACT: Mandie Crozier

PROPOSED LOCATION: NWNE 02 090S 150E

Permit Tech Review:

SURFACE: 0655 FNL 1961 FEL

Engineering Review:

BOTTOM: 0080 FNL 2635 FEL

Geology Review:

COUNTY: DUCHESNE

LATITUDE: 40.06548

LONGITUDE: -110.19706

UTM SURF EASTINGS: 568474.00

NORTHINGS: 4435334.00

FIELD NAME: MONUMENT BUTTE

LEASE TYPE: 3 - State

LEASE NUMBER: ml-43538

PROPOSED PRODUCING FORMATION(S): GREEN RIVER

SURFACE OWNER: 3 - State

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

- PLAT
- Bond: STATE/FEE - B001834
- Potash
- Oil Shale 190-5
- Oil Shale 190-3
- Oil Shale 190-13
- Water Permit: 437478
- RDCC Review:
- Fee Surface Agreement
- Intent to Commingle

Commingle Approved

LOCATION AND SITING:

- R649-2-3.
Unit: GMBU (GRRV)
- R649-3-2. General
- R649-3-3. Exception
- Drilling Unit
Board Cause No: Cause 213-11
- Effective Date:** 11/30/2009
- Siting:** Suspends General Siting
- R649-3-11. Directional Drill

Comments: Presite Completed

Stipulations: 5 - Statement of Basis - bhill
8 - Cement to Surface -- 2 strings - hmadonald
15 - Directional - bhill
27 - Other - bhill



GARY R. HERBERT
Governor

GREGORY S. BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: GMBU C-2-9-15
API Well Number: 43013509710000
Lease Number: ml-43538
Surface Owner: STATE
Approval Date: 1/4/2012

Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis (copy attached).

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

Cement volumes for the 8 5/8" and 5 1/2" casing strings shall be determined from actual hole diameters in order to place cement from the pipe setting depths back to the surface.

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Additional Approvals:

The operator is required to obtain approval from the Division of Oil, Gas and mining before performing any of the following actions during the drilling of this well:

- Any changes to the approved drilling plan – contact Dustin Doucet
- Significant plug back of the well – contact Dustin Doucet

- Plug and abandonment of the well – contact Dustin Doucet

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels
OR
submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <http://oilgas.ogm.utah.gov>
- 24 hours prior to testing blowout prevention equipment - contact Dan Jarvis
- 24 hours prior to cementing or testing casing – contact Dan Jarvis
- Within 24 hours of making any emergency changes to the approved drilling program – contact Dustin Doucet
- 24 hours prior to commencing operations to plug and abandon the well – contact Dan Jarvis

Contact Information:

The following are Division of Oil, Gas and Mining contacts and their telephone numbers (please leave a voicemail message if the person is not available to take the call):

- Carol Daniels 801-538-5284 - office
- Dustin Doucet 801-538-5281 - office
801-733-0983 - after office hours
- Dan Jarvis 801-538-5338 - office
801-231-8956 - after office hours

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

Approved By:



For John Rogers
Associate Director, Oil & Gas

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
5. LEASE DESIGNATION AND SERIAL NUMBER: ml-43538	
SUNDRY NOTICES AND REPORTS ON WELLS	
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	
6. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)	
1. TYPE OF WELL Oil Well	
8. WELL NAME and NUMBER: GMBU C-2-9-15	
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY	
9. API NUMBER: 43013509710000	
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052	
PHONE NUMBER: 435 646-4825 Ext	
9. FIELD and POOL or WILDCAT: MONUMENT BUTTE	
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0655 FNL 1961 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWNE Section: 02 Township: 09.0S Range: 15.0E Meridian: S	
COUNTY: DUCHESNE	
STATE: UTAH	

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 1/4/2013	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield proposes to extend the Application for Permit to Drill this well.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: November 27, 2012

By: 

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 11/26/2012	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013509710000

API: 43013509710000

Well Name: GMBU C-2-9-15

Location: 0655 FNL 1961 FEL QTR NWNE SEC 02 TWNP 090S RNG 150E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 1/4/2012

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

Signature: Mandie Crozier

Date: 11/26/2012

Title: Regulatory Tech Representing: NEWFIELD PRODUCTION COMPANY


STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
5.LEASE DESIGNATION AND SERIAL NUMBER: ml-43538	
SUNDRY NOTICES AND REPORTS ON WELLS	
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	
6. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
7.UNIT or CA AGREEMENT NAME: GMBU (GRRV)	
1. TYPE OF WELL Oil Well	
8. WELL NAME and NUMBER: GMBU C-2-9-15	
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY	
9. API NUMBER: 43013509710000	
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052 PHONE NUMBER: 435 646-4825 Ext	
9. FIELD and POOL or WILDCAT: MONUMENT BUTTE	
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0655 FNL 1961 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWNE Section: 02 Township: 09.0S Range: 15.0E Meridian: S	
COUNTY: DUCHESNE	
STATE: UTAH	

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 1/4/2014	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width:100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield proposes to extend the Application for Permit to Drill this well.

Approved by the Utah Division of Oil, Gas and Mining
Date: November 18, 2013
By: 

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A		DATE 11/12/2013



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013509710000

API: 43013509710000

Well Name: GMBU C-2-9-15

Location: 0655 FNL 1961 FEL QTR NWNE SEC 02 TWNP 090S RNG 150E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 1/4/2012

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Mandie Crozier

Date: 11/12/2013

Title: Regulatory Tech Representing: NEWFIELD PRODUCTION COMPANY



GARY R. HERBERT
Governor

SPENCER J. COX
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

January 8, 2015

Newfield Production Company
Rt. 3 Box 3630
Myton, UT 84052

Re: APDs Rescinded Newfield Production Company,
Duchesne and Uintah County

Ladies and Gentlemen:

Enclosed find the list of APDs that is being rescinded. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded as of January 8, 2015.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
SITLA, Ed Bonner



43-013-50969 GMBU 1-2-9-16H
43-013-50983 GMBU 1-16-9-16H
43-047-51752 GMBU 1-2T-9-17H
43-013-50970 GMBU B-2-9-15
43-013-50971 GMBU C-2-9-15