


**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT ☐

<b>APPLICATION FOR PERMIT TO DRILL</b>						<b>1. WELL NAME and NUMBER</b> GMBU Q-11-9-15					
<b>2. TYPE OF WORK</b> DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>						<b>3. FIELD OR WILDCAT</b> MONUMENT BUTTE					
<b>4. TYPE OF WELL</b> Oil Well Coalbed Methane Well: NO						<b>5. UNIT or COMMUNITIZATION AGREEMENT NAME</b> GMBU (GRRV)					
<b>6. NAME OF OPERATOR</b> NEWFIELD PRODUCTION COMPANY						<b>7. OPERATOR PHONE</b> 435 646-4825					
<b>8. ADDRESS OF OPERATOR</b> Rt 3 Box 3630 , Myton, UT, 84052						<b>9. OPERATOR E-MAIL</b> mcrozier@newfield.com					
<b>10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE)</b> UTU-74826			<b>11. MINERAL OWNERSHIP</b> FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>			<b>12. SURFACE OWNERSHIP</b> FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>					
<b>13. NAME OF SURFACE OWNER (if box 12 = 'fee')</b>						<b>14. SURFACE OWNER PHONE (if box 12 = 'fee')</b>					
<b>15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')</b>						<b>16. SURFACE OWNER E-MAIL (if box 12 = 'fee')</b>					
<b>17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')</b>			<b>18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS</b> YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>			<b>19. SLANT</b> VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>					
<b>20. LOCATION OF WELL</b>	<b>FOOTAGES</b>		<b>QTR-QTR</b>	<b>SECTION</b>	<b>TOWNSHIP</b>	<b>RANGE</b>	<b>MERIDIAN</b>				
<b>LOCATION AT SURFACE</b>	1965 FSL 1968 FWL		NESW	11	9.0 S	15.0 E	S				
<b>Top of Uppermost Producing Zone</b>	1623 FSL 1602 FWL		NESW	11	9.0 S	15.0 E	S				
<b>At Total Depth</b>	1294 FSL 1228 FWL		SWSW	11	9.0 S	15.0 E	S				
<b>21. COUNTY</b> DUCESNE			<b>22. DISTANCE TO NEAREST LEASE LINE (Feet)</b> 1294			<b>23. NUMBER OF ACRES IN DRILLING UNIT</b> 20					
			<b>25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed)</b> 1038			<b>26. PROPOSED DEPTH</b> MD: 6445 TVD: 6355					
<b>27. ELEVATION - GROUND LEVEL</b> 6165			<b>28. BOND NUMBER</b> WYB000493			<b>29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE</b> 437478					
<b>Hole, Casing, and Cement Information</b>											
<b>String</b>	<b>Hole Size</b>	<b>Casing Size</b>	<b>Length</b>	<b>Weight</b>	<b>Grade &amp; Thread</b>	<b>Max Mud Wt.</b>	<b>Cement</b>	<b>Sacks</b>	<b>Yield</b>	<b>Weight</b>	
<b>Surf</b>	12.25	8.625	0 - 300	24.0	J-55 ST&C	8.3	Class G	138	1.17	15.8	
<b>Prod</b>	7.875	5.5	0 - 6445	15.5	J-55 LT&C	8.3	Premium Lite High Strength	307	3.26	11.0	
							50/50 Poz	363	1.24	14.3	
<b>ATTACHMENTS</b>											
<b>VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES</b>											
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER					<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN						
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)					<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER						
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)					<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP						
<b>NAME</b> Mandie Crozier				<b>TITLE</b> Regulatory Tech				<b>PHONE</b> 435 646-4825			
<b>SIGNATURE</b>				<b>DATE</b> 11/29/2011				<b>EMAIL</b> mcrozier@newfield.com			
<b>API NUMBER ASSIGNED</b> 43013510910000				<b>APPROVAL</b>  Permit Manager							

RECEIVED: December 05, 2011

NEWFIELD PRODUCTION COMPANY  
GMBU Q-11-9-15  
AT SURFACE: NE/SW SECTION 11, T9S R15E  
DUCHESNE COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0' – 1615'
Green River	1615'
Wasatch	6205'
<b>Proposed TD</b>	<b>6445'</b>

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil)      1615' – 6205'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO <sub>3</sub> ) (mg/l)
Dissolved Bicarbonate (NaHCO <sub>3</sub> ) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO <sub>4</sub> ) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. **Casing Design: GMBU Q-11-9-15**

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	300'	24.0	J-55	STC	2,950 17.53	1,370 14.35	244,000 33.89
Prod casing 5-1/2"	0'	6,445'	15.5	J-55	LTC	4,810 2.35	4,040 1.97	217,000 2.17

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg  
 Pore pressure at surface casing shoe = 8.33 ppg  
 Pore pressure at prod casing shoe = 8.33 ppg  
 Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. **Cementing Design: GMBU Q-11-9-15**

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft <sup>3</sup> /sk)
			ft <sup>3</sup>			
Surface casing	300'	Class G w/ 2% CaCl	138 161	30%	15.8	1.17
Prod casing Lead	4,445'	Prem Lite II w/ 10% gel + 3% KCl	307 1001	30%	11.0	3.26
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363 451	30%	14.3	1.24

\*Actual volume pumped will be 15% over the caliper log

- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
- Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to  $\pm 300$  feet will be drilled with an air/mist system. The air rig is equipped with a 6 1/2" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about  $\pm 300$  feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated

bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the second quarter of 2012, and take approximately seven (7) days from spud to rig release.

S89°58'W - 80.18 (G.L.O.)

$589^{\circ}15'16''W - 2641.76' (Meas.)$

$588^{\circ}58'40''W - 2649.90'$  (Meas.)

1910  
Brass Cap

1910  
Brass Cap

1910  
Brass Cap

**WELL LOCATION:**  
**Q-11-9-15**

ELEV. EXIST. GRADED GROUND = 6165'

11

1910  
Brass Cap

N0°01'W (G.L.O.)

$N00^{\circ}47'58''W - 2644.35' (Meas.)$

Proportion  
(Not Set)

1968'

Top of

Center of

Pattern \

1400' — — —

1228'

Bottom  
of Hole

3

Proportion  
(Not Set)

Brass Cap

1910  
Brass Cap

$S89^{\circ}03'52''W - 2641.74'$  (Meas.)

$S89^{\circ}07'58''W - 2651.60'$  (Meas.)


S89°57'W - 80.20 (G.L.O.)

Q-11-9-15  
(Surface Location) NAD 83  
LATITUDE = 40° 02' 36.83"  
LONGITUDE = 110° 12' 06.59"

BASIS OF ELEV; Elevations are based on  
an N.G.S. OPUS Correction. LOCATION:  
LAT. 40°04'09.56" LONG. 110°00'43.28"  
(Tristate Aluminum Cap) Elev. 5281.57'

WELL LOCATION, Q-11-9-15, LOCATED  
AS SHOWN IN THE NE 1/4 SW 1/4 OF  
SECTION 11, T9S, R15E, S.L.B.&M.  
DUCESNE COUNTY, UTAH.

TARGET BOTTOM HOLE, Q-11-9-15,  
LOCATED AS SHOWN IN THE SW 1/4  
SW 1/4 OF SECTION 11, T9S, R15E,  
S.L.B.&M. DUCHESNE COUNTY, UTAH.



NOTES:

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.

THIS IS TO CERTIFY THAT THE ABOVE PLAN WAS  
PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS  
MADE BY ME OR UNDER MY SUPERVISION AND THAT  
THE SAME ARE TRUE AND CORRECT TO THE BEST  
OF MY KNOWLEDGE AND BELIEF.

REGISTERED LAND SURVEYOR  
REGISTRATION No. 100377  
STATE OF UTAH


*TRI STATE LAND SURVEYING & CONSULTING*

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078  
(435) 781-2501

DATE SURVEYED: 07-26-11	SURVEYED BY: K.S.	VERSION:
DATE DRAWN: 08-05-11	DRAWN BY: F.T.M.	V1
REVISED:	SCALE: 1" = 1000'	



## Access Road Map

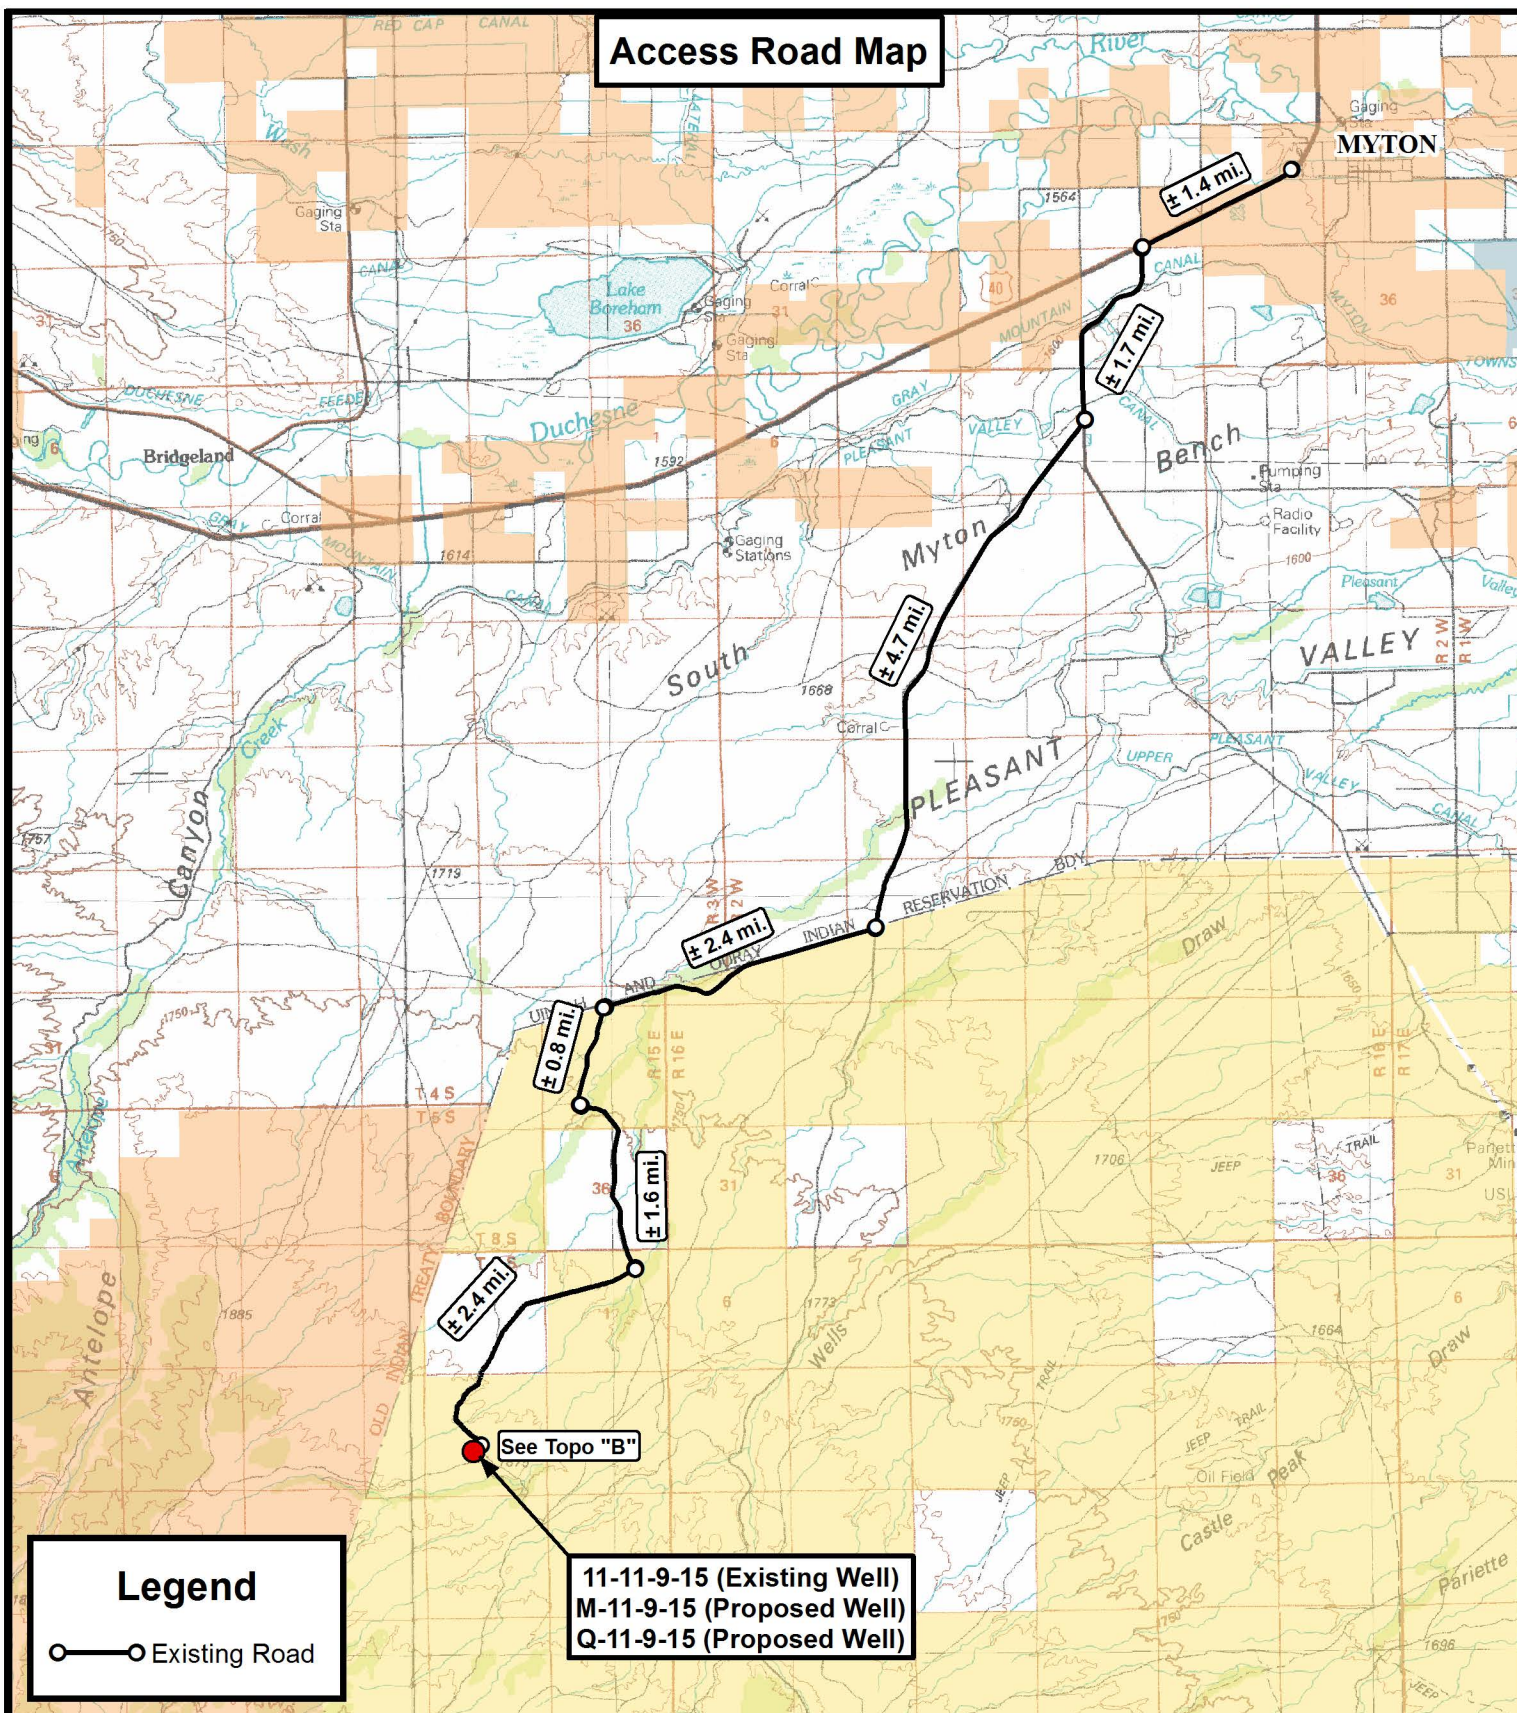

**Tri State**  
**Land Surveying, Inc.**  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
F: (435) 781-2518

**NEWFIELD EXPLORATION COMPANY**

11-11-9-15 (Existing Well)  
M-11-9-15 (Proposed Well)  
Q-11-9-15 (Proposed Well)  
SEC. 11, T9S, R15E, S.L.B.&M. Duchesne County, UT.


DRAWN BY:	D.C.R.	REVISED:	VERSION:
DATE:	08-03-2011		V1
SCALE:	1:100,000		

**TOPOGRAPHIC MAP**

SHEET  
**A**



## Access Road Map

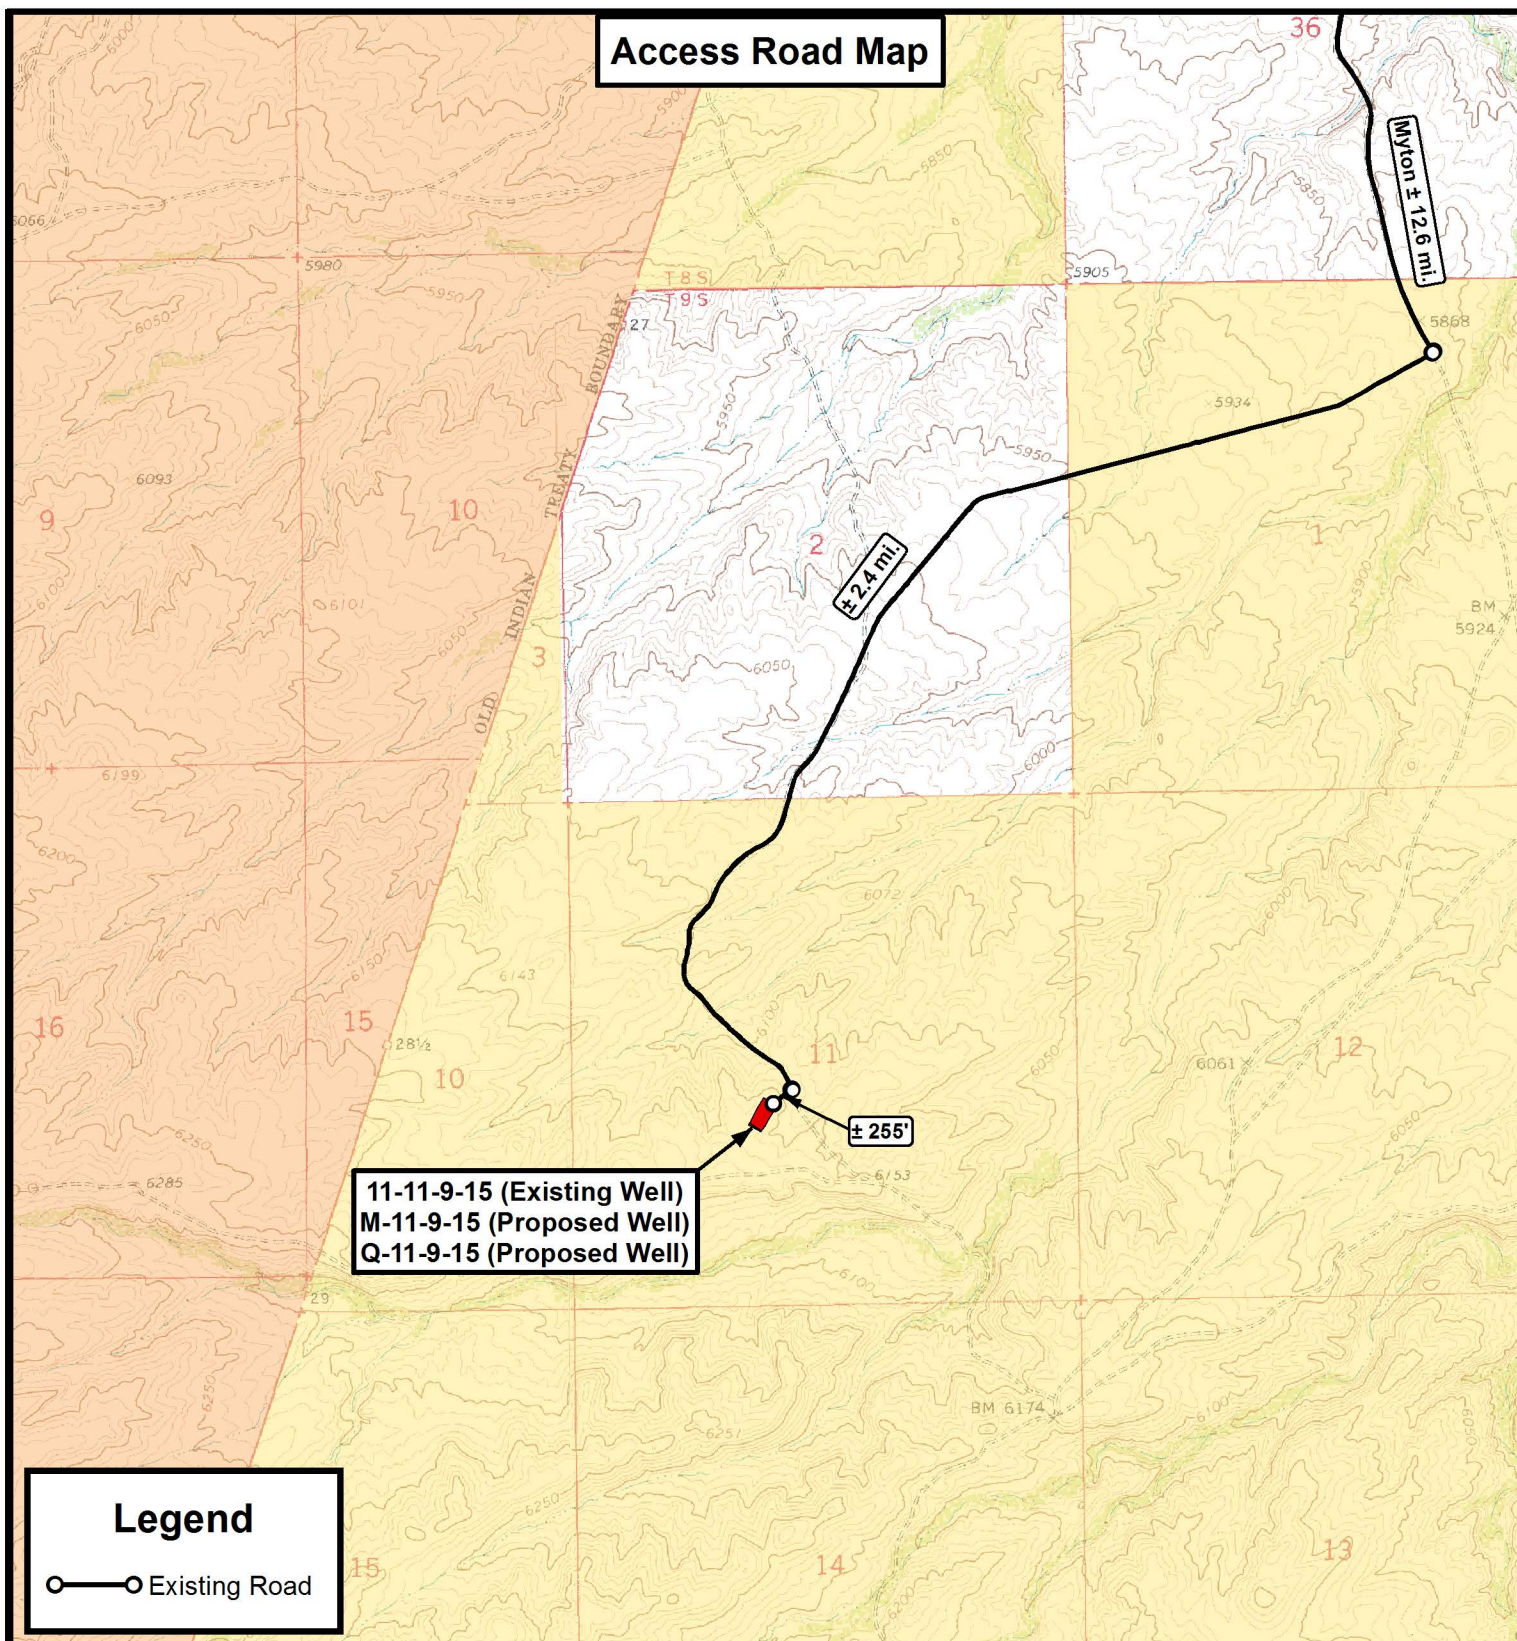

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

**Tri State**  
**Land Surveying, Inc.**  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
F: (435) 781-2518

**NEWFIELD EXPLORATION COMPANY**

11-11-9-15 (Existing Well)  
M-11-9-15 (Proposed Well)  
Q-11-9-15 (Proposed Well)  
SEC. 11, T9S, R15E, S.L.B.&M. Duchesne County, UT.


DRAWN BY:	D.C.R.	REVISED:	VERSION:
DATE:	08-03-2011		V1
SCALE:	1" = 2,000'		

**TOPOGRAPHIC MAP**

SHEET  
**B**



# Proposed Pipeline Map

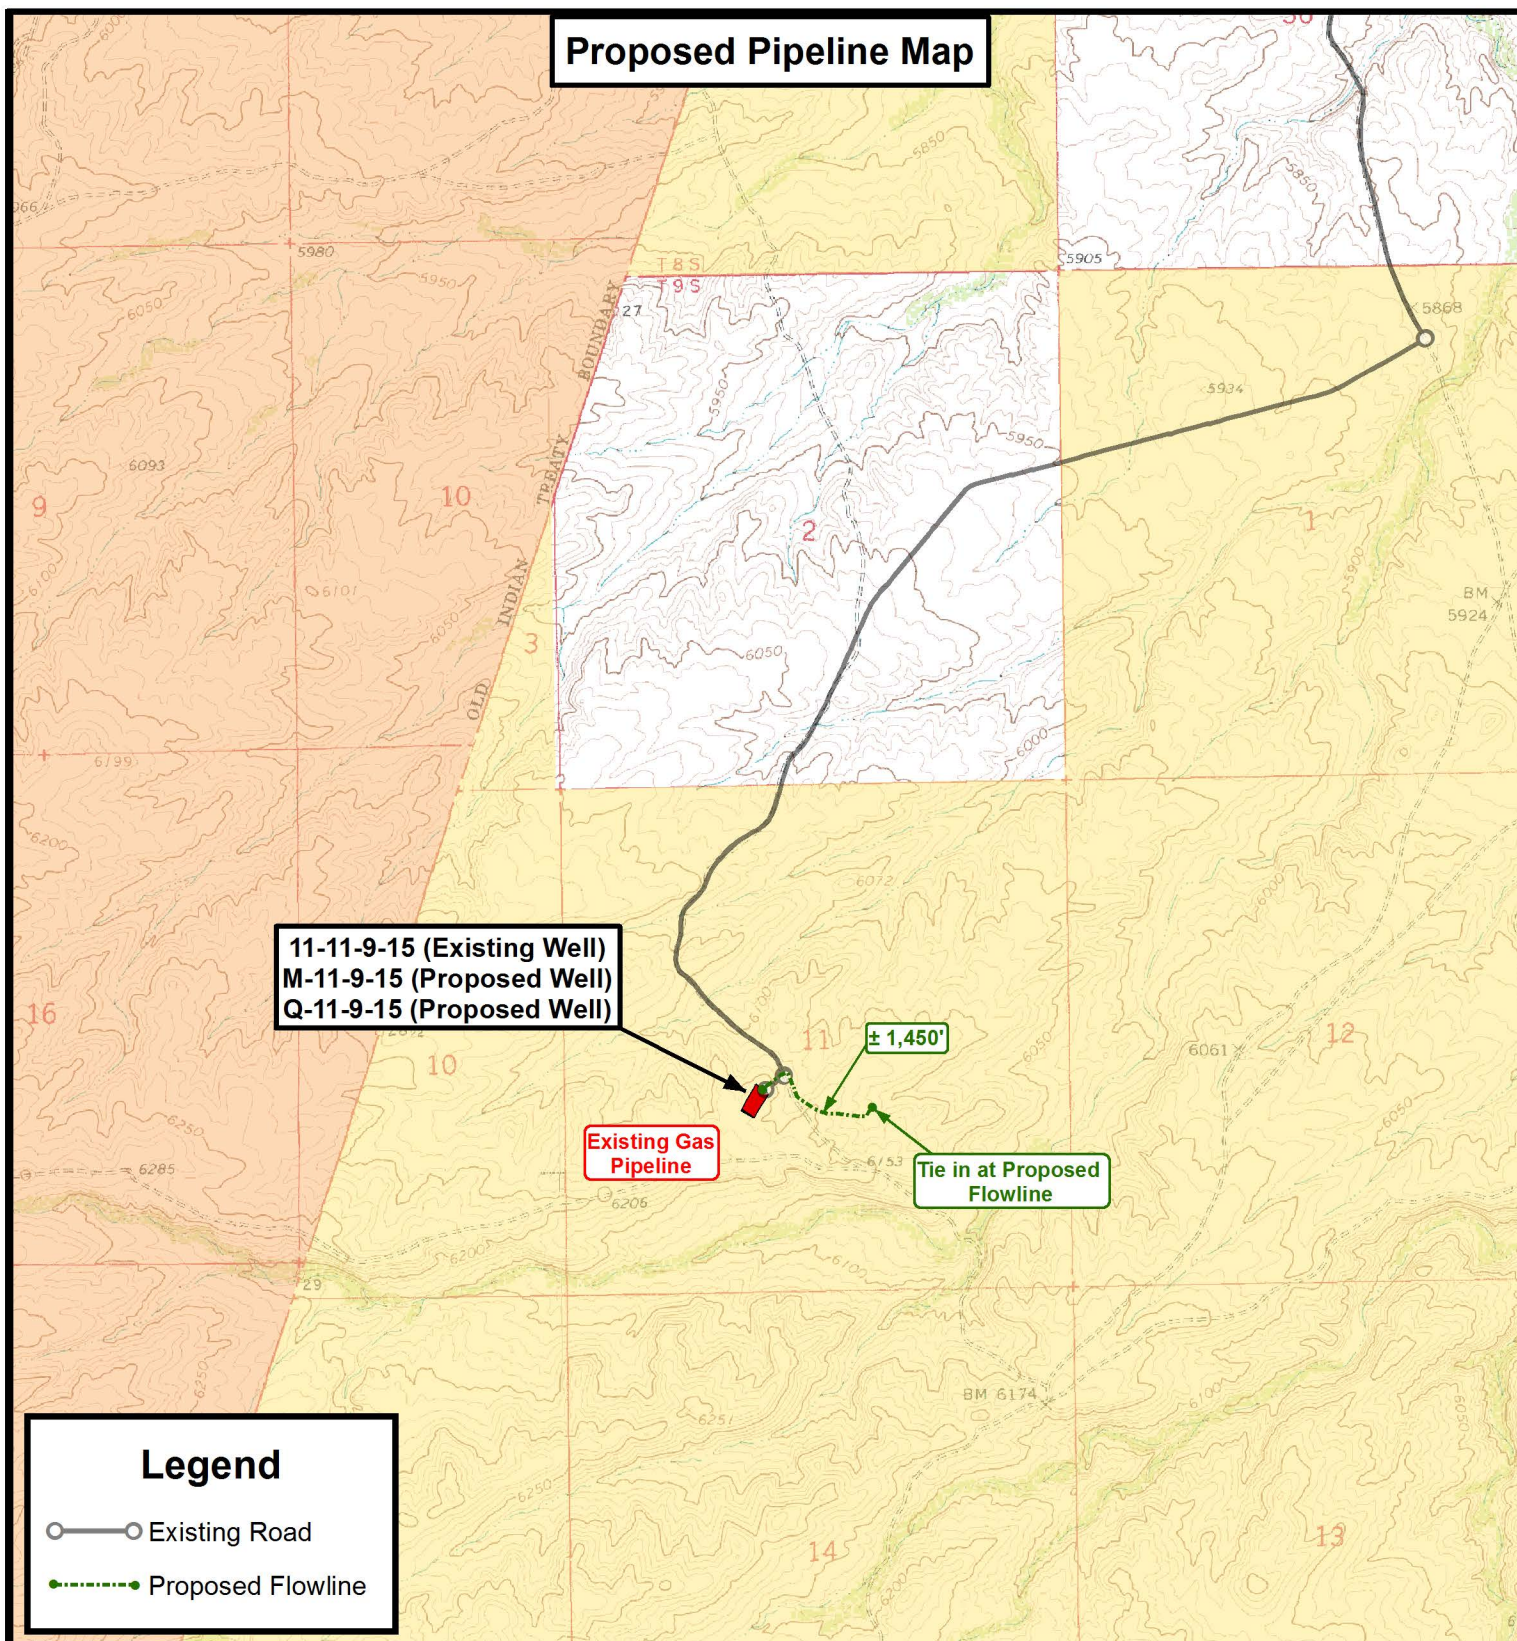

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

**Tri State**  
Land Surveying, Inc.  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
F: (435) 781-2518



## NEWFIELD EXPLORATION COMPANY

11-11-9-15 (Existing Well)  
M-11-9-15 (Proposed Well)  
Q-11-9-15 (Proposed Well)  
SEC. 11, T9S, R15E, S.L.B.&M. Duchesne County, UT.

DRAWN BY:	D.C.R.	REVISED:	VERSION:
DATE:	08-03-2011		V1
SCALE:	1" = 2,000'		

**TOPOGRAPHIC MAP**


SHEET

**C**



**Exhibit "B" Map**

11-11-9-15 (Existing Well)  
 M-11-9-15 (Proposed Well)  
 Q-11-9-15 (Proposed Well)

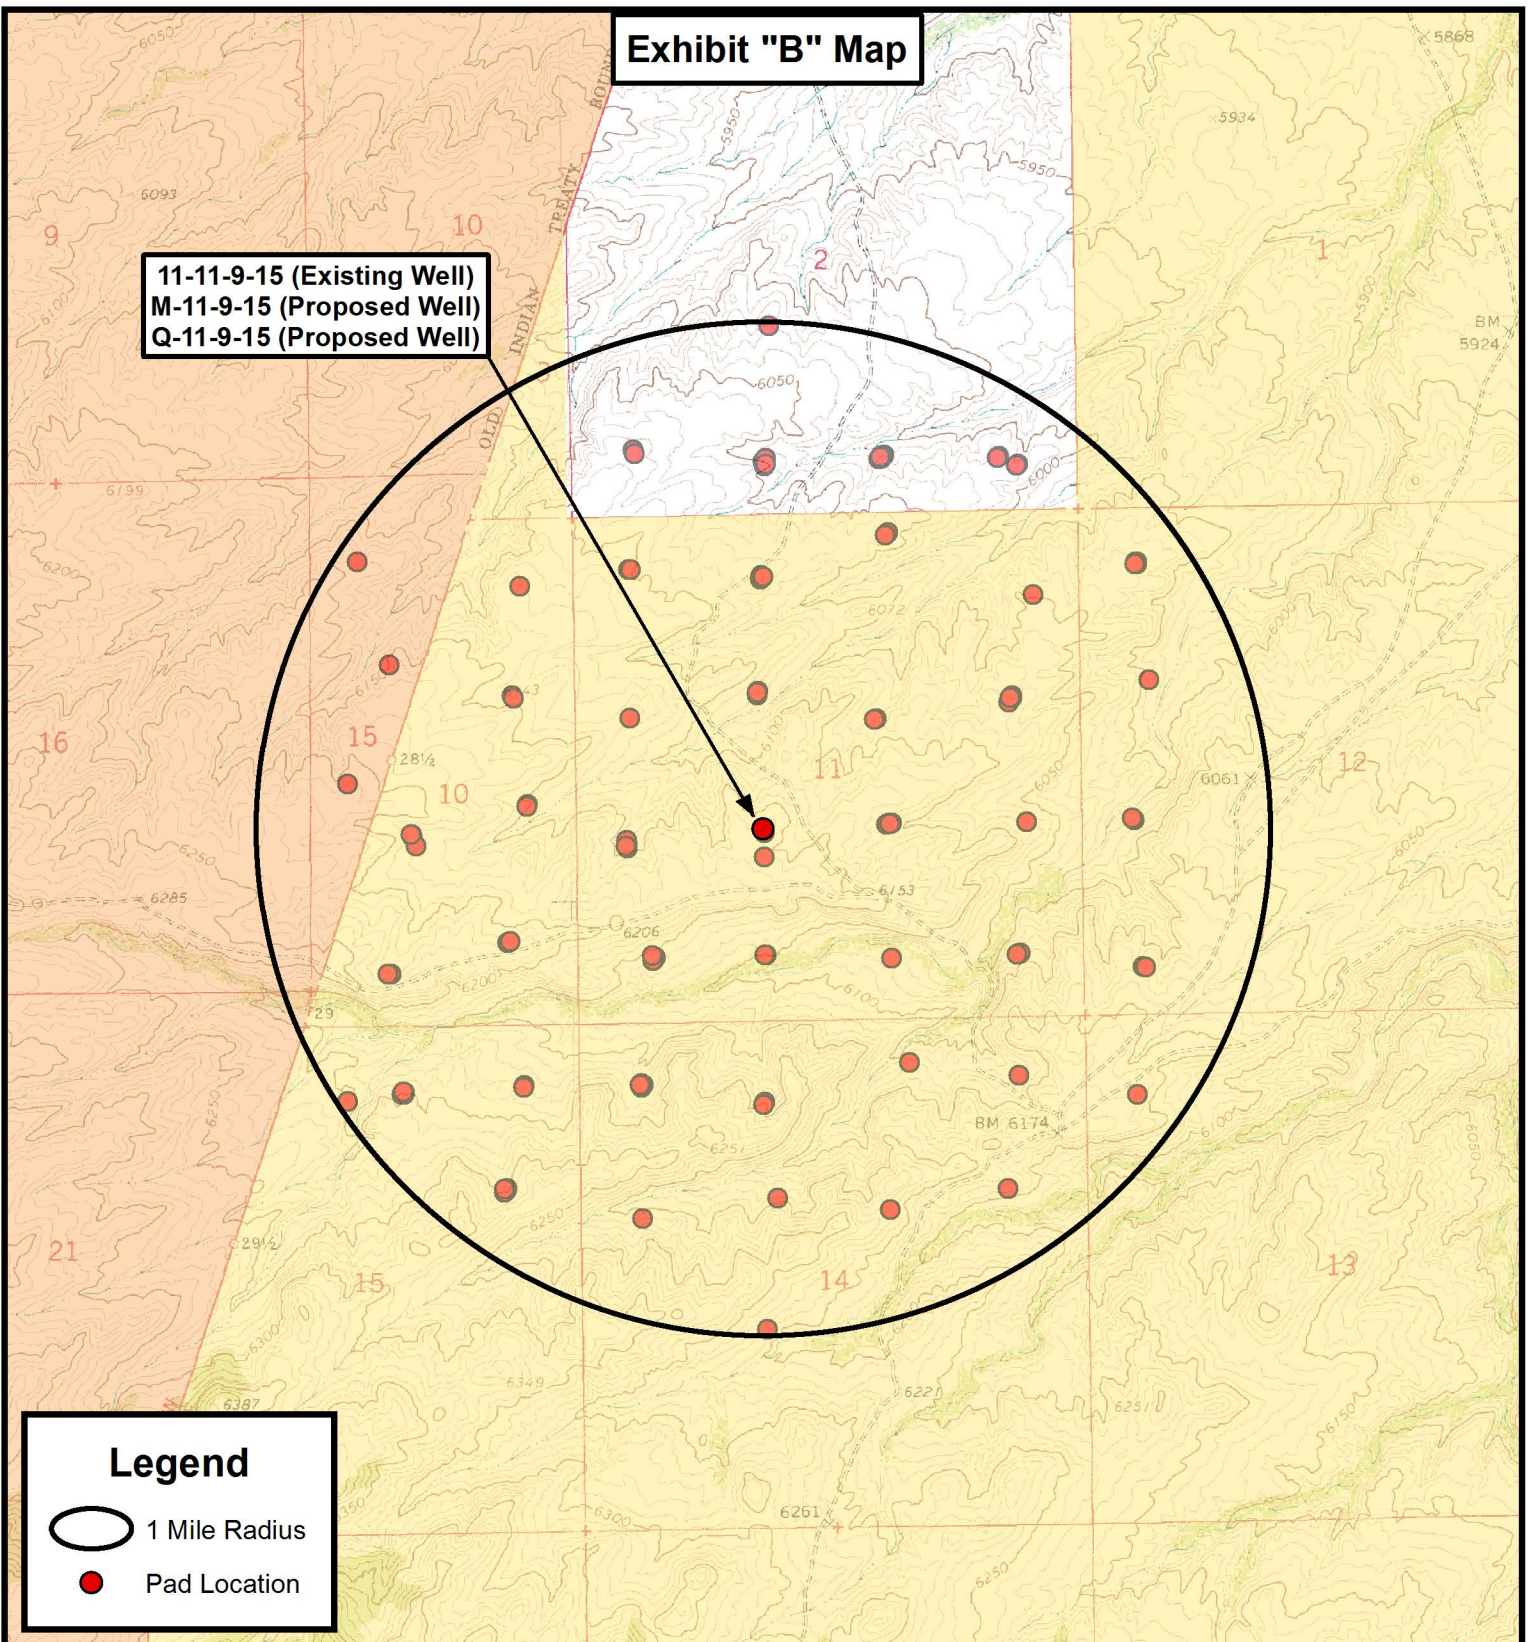**Legend**

- 1 Mile Radius  
 ● Pad Location

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

**Tri State**  
**Land Surveying, Inc.**  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
 F: (435) 781-2518

**NEWFIELD EXPLORATION COMPANY**

11-11-9-15 (Existing Well)  
 M-11-9-15 (Proposed Well)  
 Q-11-9-15 (Proposed Well)  
 SEC. 11, T9S, R15E, S.L.B.&M. Duchesne County, UT.

DRAWN BY:	D.C.R.	REVISED:	VERSION:
DATE:	08-03-2011		V1
SCALE:	1" = 2,000'		

**TOPOGRAPHIC MAP**

SHEET  
**D**



# **NEWFIELD EXPLORATION**

**USGS Myton SW (UT)  
SECTION 11 T 9S R15E  
Q-11-9-15**

**Wellbore #1**

**Plan: Design #1**

## **Standard Planning Report**

**11 August, 2011**







<b>Database:</b>	EDM 2003.21 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Q-11-9-15
<b>Company:</b>	NEWFIELD EXPLORATION	<b>TVD Reference:</b>	Q-11-9-15 @ 6177.0ft (Original Well Elev)
<b>Project:</b>	USGS Myton SW (UT)	<b>MD Reference:</b>	Q-11-9-15 @ 6177.0ft (Original Well Elev)
<b>Site:</b>	SECTION 11 T 9S R15E	<b>North Reference:</b>	True
<b>Well:</b>	Q-11-9-15	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Design #1		

<b>Project</b>	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		
<b>Map Zone:</b>	Utah Central Zone		

<b>Site</b>	SECTION 11 T 9S R15E			
<b>Site Position:</b>		<b>Northing:</b>	7,188,000.00 ft	<b>Latitude:</b> 40° 2' 44.351 N
<b>From:</b>	Lat/Long	<b>Easting:</b>	2,004,500.00 ft	<b>Longitude:</b> 110° 11' 57.926 W
<b>Position Uncertainty:</b>	0.0 ft	<b>Slot Radius:</b>	"	<b>Grid Convergence:</b> 0.83 °

<b>Well</b>	Q-11-9-15, SHL LAT: 40 02 36.83 LONG: -110 12 06.59			
<b>Well Position</b>	<b>+N/-S</b>	-761.0 ft	<b>Northing:</b>	7,187,229.26 ft
	<b>+E/-W</b>	-673.8 ft	<b>Easting:</b>	2,003,837.37 ft
<b>Position Uncertainty</b>	0.0 ft	<b>Wellhead Elevation:</b>	6,177.0 ft	<b>Ground Level:</b> 6,165.0 ft

<b>Wellbore</b>	Wellbore #1				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2010	2011/08/11	11.35	65.76	52,229

<b>Design</b>	Design #1			
<b>Audit Notes:</b>				
<b>Version:</b>	<b>Phase:</b>	PROTOTYPE	<b>Tie On Depth:</b>	0.0
<b>Vertical Section:</b>	<b>Depth From (TVD) (ft)</b>	<b>+N/-S (ft)</b>	<b>+E/-W (ft)</b>	<b>Direction (°)</b>
	5,100.0	0.0	0.0	226.90

<b>Plan Sections</b>										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,299.0	10.48	226.90	1,295.1	-43.6	-46.6	1.50	1.50	0.00	226.90	
5,168.5	10.48	226.90	5,100.0	-524.7	-560.7	0.00	0.00	0.00	0.00	Q-11-9-15 TGT
6,444.8	10.48	226.90	6,355.0	-683.4	-730.3	0.00	0.00	0.00	0.00	



<b>Database:</b>	EDM 2003.21 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Q-11-9-15
<b>Company:</b>	NEWFIELD EXPLORATION	<b>TVD Reference:</b>	Q-11-9-15 @ 6177.0ft (Original Well Elev)
<b>Project:</b>	USGS Myton SW (UT)	<b>MD Reference:</b>	Q-11-9-15 @ 6177.0ft (Original Well Elev)
<b>Site:</b>	SECTION 11 T 9S R15E	<b>North Reference:</b>	True
<b>Well:</b>	Q-11-9-15	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	1.50	226.90	700.0	-0.9	-1.0	1.3	1.50	1.50	0.00
800.0	3.00	226.90	799.9	-3.6	-3.8	5.2	1.50	1.50	0.00
900.0	4.50	226.90	899.7	-8.0	-8.6	11.8	1.50	1.50	0.00
1,000.0	6.00	226.90	999.3	-14.3	-15.3	20.9	1.50	1.50	0.00
1,100.0	7.50	226.90	1,098.6	-22.3	-23.9	32.7	1.50	1.50	0.00
1,200.0	9.00	226.90	1,197.5	-32.1	-34.3	47.0	1.50	1.50	0.00
1,299.0	10.48	226.90	1,295.1	-43.6	-46.6	63.8	1.50	1.50	0.00
1,300.0	10.48	226.90	1,296.1	-43.7	-46.7	64.0	0.00	0.00	0.00
1,400.0	10.48	226.90	1,394.4	-56.1	-60.0	82.2	0.00	0.00	0.00
1,500.0	10.48	226.90	1,492.7	-68.6	-73.3	100.4	0.00	0.00	0.00
1,600.0	10.48	226.90	1,591.1	-81.0	-86.6	118.6	0.00	0.00	0.00
1,700.0	10.48	226.90	1,689.4	-93.4	-99.9	136.8	0.00	0.00	0.00
1,800.0	10.48	226.90	1,787.7	-105.9	-113.1	154.9	0.00	0.00	0.00
1,900.0	10.48	226.90	1,886.1	-118.3	-126.4	173.1	0.00	0.00	0.00
2,000.0	10.48	226.90	1,984.4	-130.7	-139.7	191.3	0.00	0.00	0.00
2,100.0	10.48	226.90	2,082.7	-143.2	-153.0	209.5	0.00	0.00	0.00
2,200.0	10.48	226.90	2,181.1	-155.6	-166.3	227.7	0.00	0.00	0.00
2,300.0	10.48	226.90	2,279.4	-168.0	-179.6	245.9	0.00	0.00	0.00
2,400.0	10.48	226.90	2,377.7	-180.5	-192.9	264.1	0.00	0.00	0.00
2,500.0	10.48	226.90	2,476.1	-192.9	-206.1	282.3	0.00	0.00	0.00
2,600.0	10.48	226.90	2,574.4	-205.3	-219.4	300.5	0.00	0.00	0.00
2,700.0	10.48	226.90	2,672.7	-217.8	-232.7	318.7	0.00	0.00	0.00
2,800.0	10.48	226.90	2,771.0	-230.2	-246.0	336.9	0.00	0.00	0.00
2,900.0	10.48	226.90	2,869.4	-242.6	-259.3	355.1	0.00	0.00	0.00
3,000.0	10.48	226.90	2,967.7	-255.1	-272.6	373.3	0.00	0.00	0.00
3,100.0	10.48	226.90	3,066.0	-267.5	-285.9	391.5	0.00	0.00	0.00
3,200.0	10.48	226.90	3,164.4	-279.9	-299.2	409.7	0.00	0.00	0.00
3,300.0	10.48	226.90	3,262.7	-292.4	-312.4	427.9	0.00	0.00	0.00
3,400.0	10.48	226.90	3,361.0	-304.8	-325.7	446.1	0.00	0.00	0.00
3,500.0	10.48	226.90	3,459.4	-317.2	-339.0	464.3	0.00	0.00	0.00
3,600.0	10.48	226.90	3,557.7	-329.7	-352.3	482.5	0.00	0.00	0.00
3,700.0	10.48	226.90	3,656.0	-342.1	-365.6	500.7	0.00	0.00	0.00
3,800.0	10.48	226.90	3,754.3	-354.5	-378.9	518.9	0.00	0.00	0.00
3,900.0	10.48	226.90	3,852.7	-367.0	-392.2	537.1	0.00	0.00	0.00
4,000.0	10.48	226.90	3,951.0	-379.4	-405.5	555.3	0.00	0.00	0.00
4,100.0	10.48	226.90	4,049.3	-391.9	-418.7	573.5	0.00	0.00	0.00
4,200.0	10.48	226.90	4,147.7	-404.3	-432.0	591.7	0.00	0.00	0.00
4,300.0	10.48	226.90	4,246.0	-416.7	-445.3	609.9	0.00	0.00	0.00
4,400.0	10.48	226.90	4,344.3	-429.2	-458.6	628.1	0.00	0.00	0.00
4,500.0	10.48	226.90	4,442.7	-441.6	-471.9	646.3	0.00	0.00	0.00
4,600.0	10.48	226.90	4,541.0	-454.0	-485.2	664.5	0.00	0.00	0.00
4,700.0	10.48	226.90	4,639.3	-466.5	-498.5	682.7	0.00	0.00	0.00
4,800.0	10.48	226.90	4,737.6	-478.9	-511.8	700.9	0.00	0.00	0.00
4,900.0	10.48	226.90	4,836.0	-491.3	-525.0	719.1	0.00	0.00	0.00
5,000.0	10.48	226.90	4,934.3	-503.8	-538.3	737.3	0.00	0.00	0.00
5,100.0	10.48	226.90	5,032.6	-516.2	-551.6	755.5	0.00	0.00	0.00
5,168.5	10.48	226.90	5,100.0	-524.7	-560.7	767.9	0.00	0.00	0.00



<b>Database:</b>	EDM 2003.21 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Q-11-9-15
<b>Company:</b>	NEWFIELD EXPLORATION	<b>TVD Reference:</b>	Q-11-9-15 @ 6177.0ft (Original Well Elev)
<b>Project:</b>	USGS Myton SW (UT)	<b>MD Reference:</b>	Q-11-9-15 @ 6177.0ft (Original Well Elev)
<b>Site:</b>	SECTION 11 T 9S R15E	<b>North Reference:</b>	True
<b>Well:</b>	Q-11-9-15	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Design #1		


Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,200.0	10.48	226.90	5,131.0	-528.6	-564.9	773.7	0.00	0.00	0.00
5,300.0	10.48	226.90	5,229.3	-541.1	-578.2	791.9	0.00	0.00	0.00
5,400.0	10.48	226.90	5,327.6	-553.5	-591.5	810.1	0.00	0.00	0.00
5,500.0	10.48	226.90	5,426.0	-565.9	-604.8	828.3	0.00	0.00	0.00
5,600.0	10.48	226.90	5,524.3	-578.4	-618.0	846.5	0.00	0.00	0.00
5,700.0	10.48	226.90	5,622.6	-590.8	-631.3	864.6	0.00	0.00	0.00
5,800.0	10.48	226.90	5,721.0	-603.2	-644.6	882.8	0.00	0.00	0.00
5,900.0	10.48	226.90	5,819.3	-615.7	-657.9	901.0	0.00	0.00	0.00
6,000.0	10.48	226.90	5,917.6	-628.1	-671.2	919.2	0.00	0.00	0.00
6,100.0	10.48	226.90	6,015.9	-640.5	-684.5	937.4	0.00	0.00	0.00
6,200.0	10.48	226.90	6,114.3	-653.0	-697.8	955.6	0.00	0.00	0.00
6,300.0	10.48	226.90	6,212.6	-665.4	-711.1	973.8	0.00	0.00	0.00
6,400.0	10.48	226.90	6,310.9	-677.8	-724.3	992.0	0.00	0.00	0.00
6,444.8	10.48	226.90	6,355.0	-683.4	-730.3	1,000.2	0.00	0.00	0.00



API Well Number: 43013510910000





Project: USGS Myton SW (UT)  
 Site: SECTION 11 T 9S R15E  
 Well: Q-11-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.35°

Magnetic Field  
 Strength: 52229.2snT  
 Dip Angle: 65.76°  
 Date: 2011/08/11  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

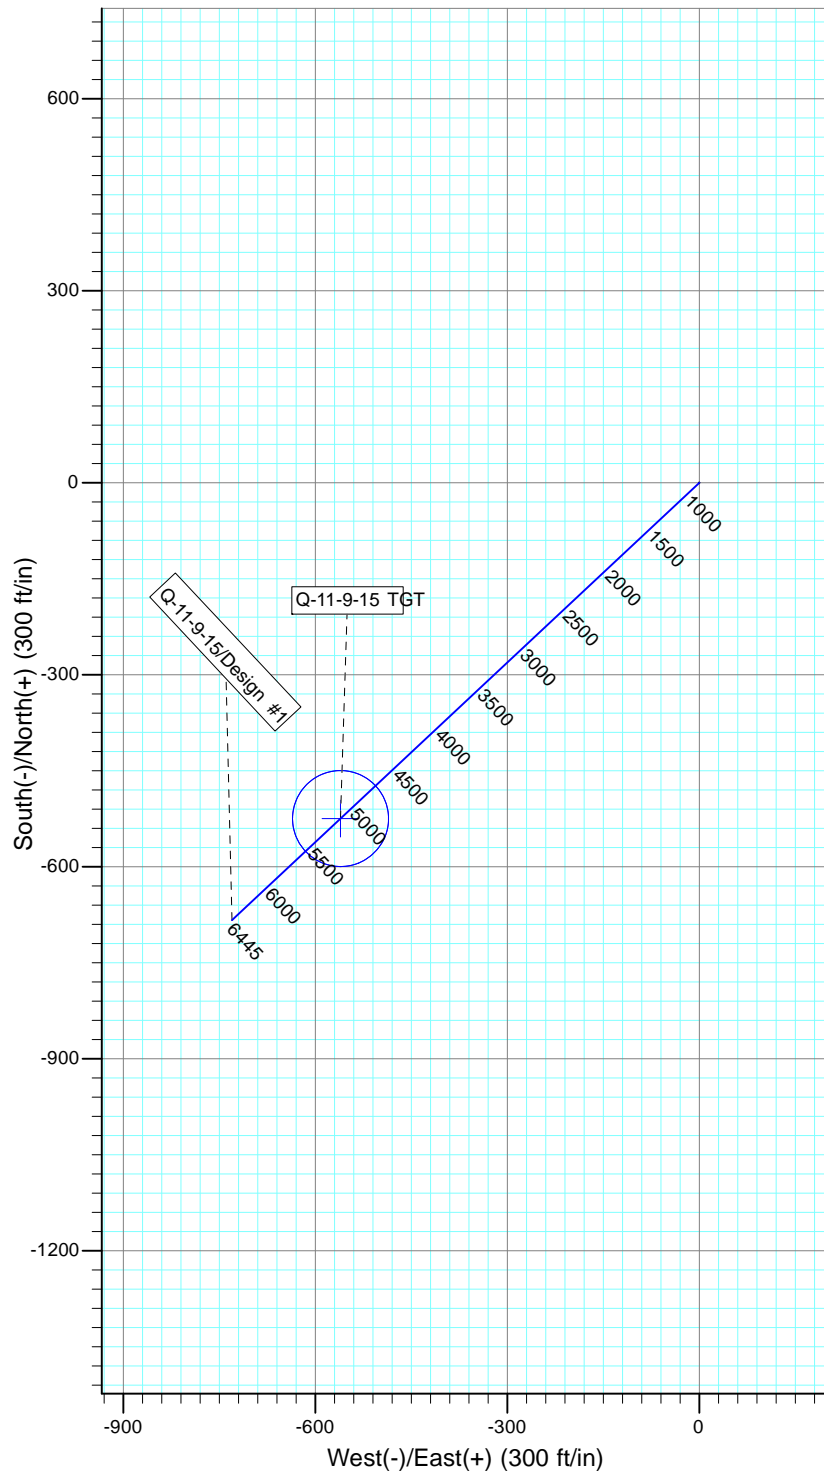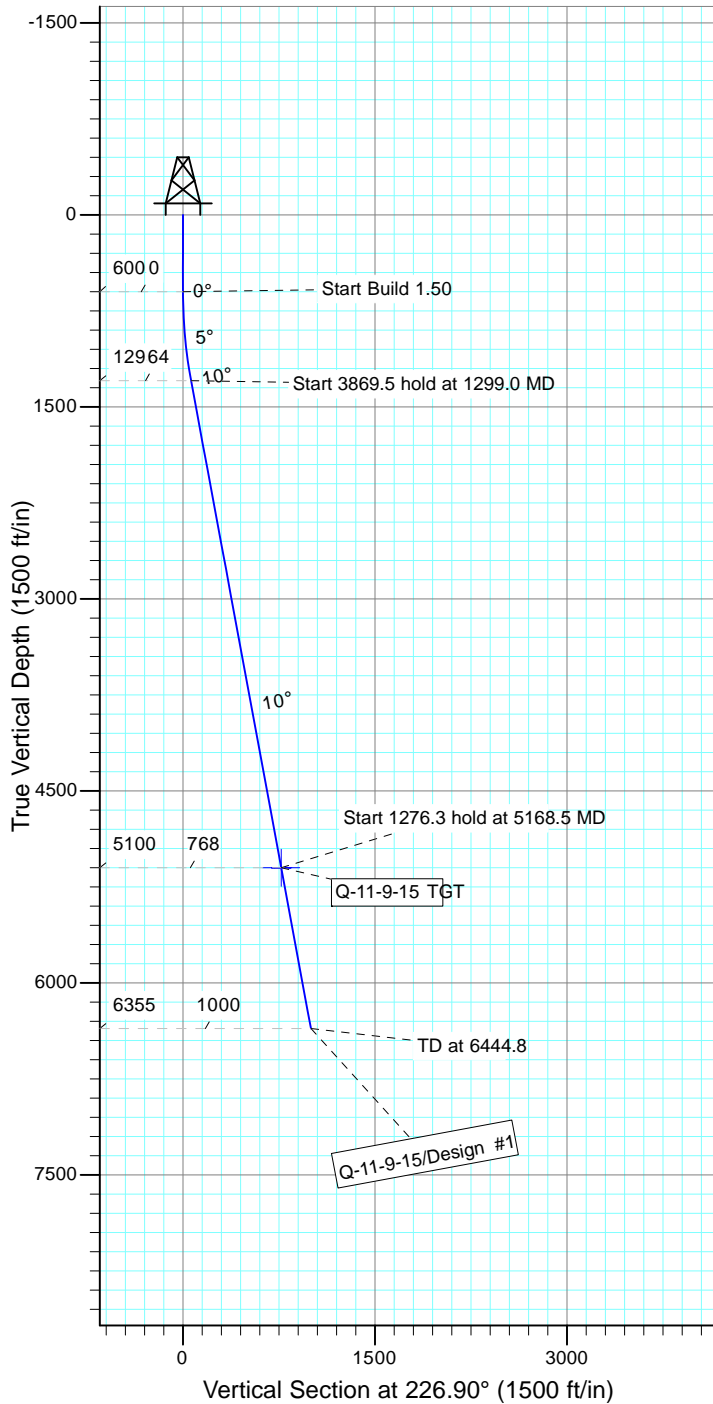

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
Q-11-9-15 TGT	5100.0	-524.7	-560.7	Circle (Radius: 75.0)

## SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1299.0	10.48	226.90	1295.1	-43.6	-46.6	1.50	226.90	63.8	
4	5168.5	10.48	226.90	5100.0	-524.7	-560.7	0.00	0.00	767.9	Q-11-9-15 TGT
5	6444.8	10.48	226.90	6355.0	-683.4	-730.3	0.00	0.00	1000.2	



NEWFIELD PRODUCTION COMPANY  
GMBU Q-11-9-15  
AT SURFACE: SW/SW SECTION 11, T9S R15E  
DUCHESNE COUNTY, UTAH

ONSHORE ORDER NO. 1

**MULTI-POINT SURFACE USE & OPERATIONS PLAN**

**1. EXISTING ROADS**

See attached Topographic Map "A"

To reach Newfield Production Company well location site GMBU Q-11-9-15 located in the SW 1/4 SW 1/4 Section 11, T9S R15E, Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 – 1.4 miles  $\pm$  to the junction of this highway and UT State Hwy 53; proceed in a southwesterly direction – 6.4 miles  $\pm$  to it's junction with an existing road to the southwest; proceed in a southwesterly direction – 2.4 miles  $\pm$  to it's junction with an existing road to the southwest; proceed in a southwesterly direction – 0.8  $\pm$  to it's junction with an existing road to the south; proceed in a southerly direction – 1.6 miles  $\pm$  to it's junction with an existing road to the southwest; proceed in a southwesterly direction – 2.4  $\pm$  to it's junction with the beginning of the access road to the existing 11-11-9-15 well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

**2. PLANNED ACCESS ROAD**

There is no proposed access road for this location. The proposed well will be drilled directionally off of the existing 11-11-9-15 well pad. See attached **Topographic Map "B"**.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

**3. LOCATION OF EXISTING WELLS**

Refer to Exhibit "B".

**4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District  
Water Right : 43-10136

Maurice Harvey Pond  
Water Right: 47-1358

Neil Moon Pond  
Water Right: 43-11787

Newfield Collector Well  
Water Right: 47-1817 (A30414DVA, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.



8. **ANCILLARY FACILITIES**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT**

See attached Location Layout Sheet.

**Fencing Requirements**

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

- a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

- b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP** – Bureau of Land Management.

12. **OTHER ADDITIONAL INFORMATION**

The Archaeological Resource Surveys and Paleontological Resource Surveys for this area are attached. State of Utah Antiquities Project Permit # U-01-MQ-0445b 6/24/01 and State of Utah Antiquities Project Permit # U-00-MQ-0610b 11/15/00, prepared by Montgomery Archaeological Consultants. Paleontological Resource Surveys prepared by, Wade E. Miller, 11/6/00 and 7/28/03. See attached report cover pages, Exhibit "D".

#### **Surface Flow Line**

Newfield requests 1,450' of surface flow line be granted. The Surface Flow Line will consist of up to a 14" bundled pipe consisting of 2-2" poly glycol lines and 1-3" production line. For all new wells, Newfield. **Refer to Topographic Map "C"** for the proposed location of the proposed flow line. Flow lines will be tan and will be constructed using the following procedures:

Clearing and Grading: No clearing or grading of the ROW will be required. The centerline of the proposed route will be staked prior to installation. Flow lines shall be placed as close to existing roads as possible without interfering with normal road travel or road maintenance activities. Due to the proximity of existing facilities, no temporary use or construction/storage areas are anticipated. If necessary, temporary use or construction/storage areas will be identified on a topographic map included in the approved permit.

Installation: The proposed flow lines will be installed 4-6" above the ground. For portions along existing two-track and primary access roads, lengths of pipe will be strung out in the borrow ditch, welded together, and rolled or dragged into place with heavy equipment. For pipelines that are installed cross-country (not along existing or proposed roads), travel along the lines will be infrequent and for maintenance needs only. No installation activities will be performed during periods when the soil is too wet to adequately support installation equipment. If such equipment creates ruts in excess of three (3) inches deep, the soil will be deemed too wet to adequately support the equipment.

Termination and Final Reclamation: After abandonment of the associated production facilities, the flow lines will be cut and removed, and any incidental surface disturbance reclaimed. Reclamation procedures will follow those outlined in the Castle Peak and Eight Mile Flat Reclamation and Weed Management Plan.

#### **Water Disposal**

After first production, if the production water meets quality guidelines, it will be transported to the Ashley, Monument Butte, Jonah, South Wells Draw and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project. Water not meeting quality criteria, will be disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), Federally approved surface disposal facilities or at a State of Utah approved surface disposal facilities.

#### **Additional Surface Stipulations**

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

#### **Details of the On-Site Inspection**

The proposed GMBU Q-11-9-15 was on-sited on 10/26/11. The following were present; Tim Eaton (Newfield Production), Christine Cimiluca (Bureau of Land Management), and Suzanne Grayson (Bureau of Land Management).

#### **Hazardous Material Declaration**

Newfield Production Company guarantees that during the drilling and completion of the GMBU Q-11-9-15, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the GMBU Q-11-9-15, Newfield will use, produce,

store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**  
**Representative**

Name: Tim Eaton

Address: Newfield Production Company  
Route 3, Box 3630  
Myton, UT 84052

Telephone: (435) 646-3721

**Certification**

Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #Q-11-9-15, Section 11, Township 9S, Range 15E: Lease UTU-74826 Duchesne County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #WYB000493.


I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

11/29/11  
Date

\_\_\_\_\_  
Mandie Crozier  
Regulatory Analyst  
Newfield Production Company



## Typical 2M BOP stack configuration

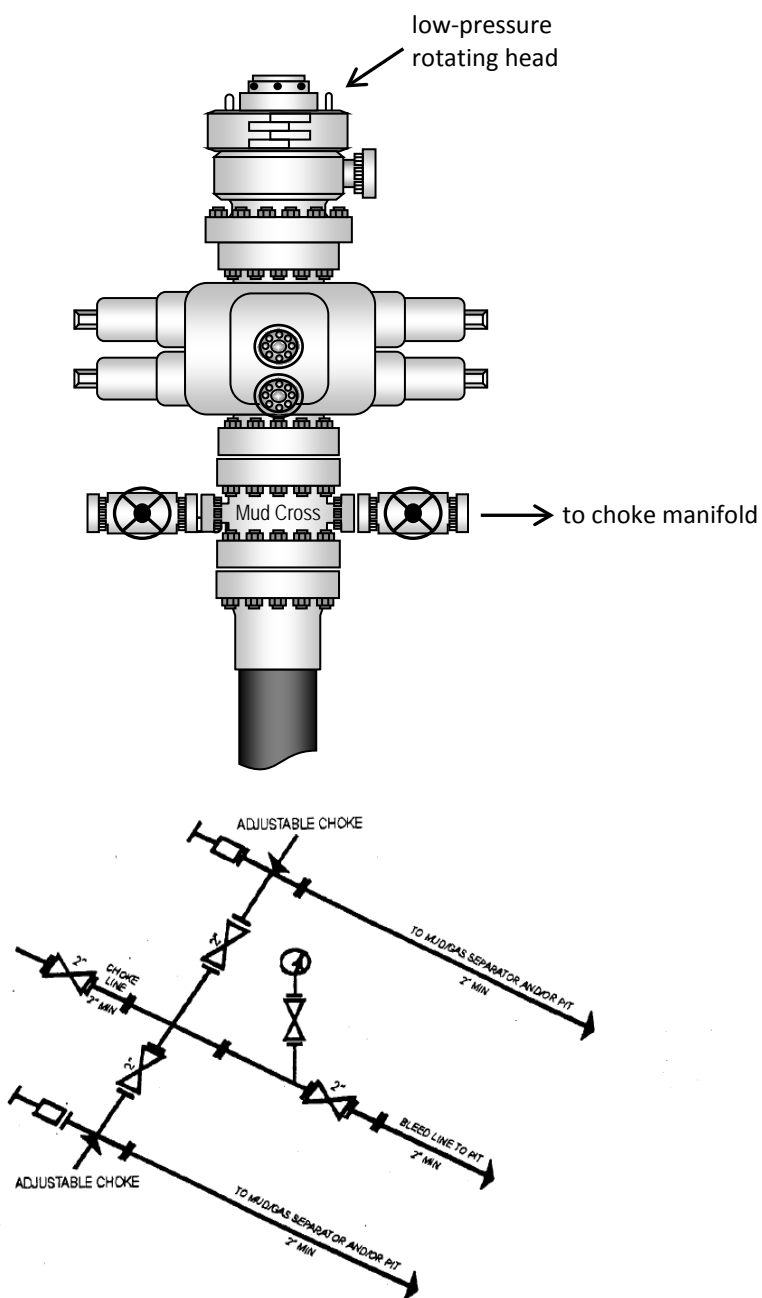

2M CHOKE MANIFOLD EQUIPMENT - CONFIGURATION OF CHOKES MAY VARY

# NEWFIELD EXPLORATION COMPANY

## WELL PAD INTERFERENCE PLAT

11-11-9-15 (Existing Well)

Q-11-9-15 (Proposed Well)

M-11-9-15 (Proposed Well)

Pad Location: NESW Section 11, T9S, R15E, S.L.B.&M.



### TOP HOLE FOOTAGES

Q-11-9-15 (PROPOSED)

1965' FSL & 1968' FWL

M-11-9-15 (PROPOSED)

1945' FSL & 1974' FWL

### CENTER OF PATTERN FOOTAGES

Q-11-9-15 (PROPOSED)

1450' FSL & 1400' FWL

M-11-9-15 (PROPOSED)

2580' FNL & 2500' FWL


### BOTTOM HOLE FOOTAGES

Q-11-9-15 (PROPOSED)

1294' FSL & 1228' FWL

M-11-9-15 (PROPOSED)

2338' FNL & 2624' FEL

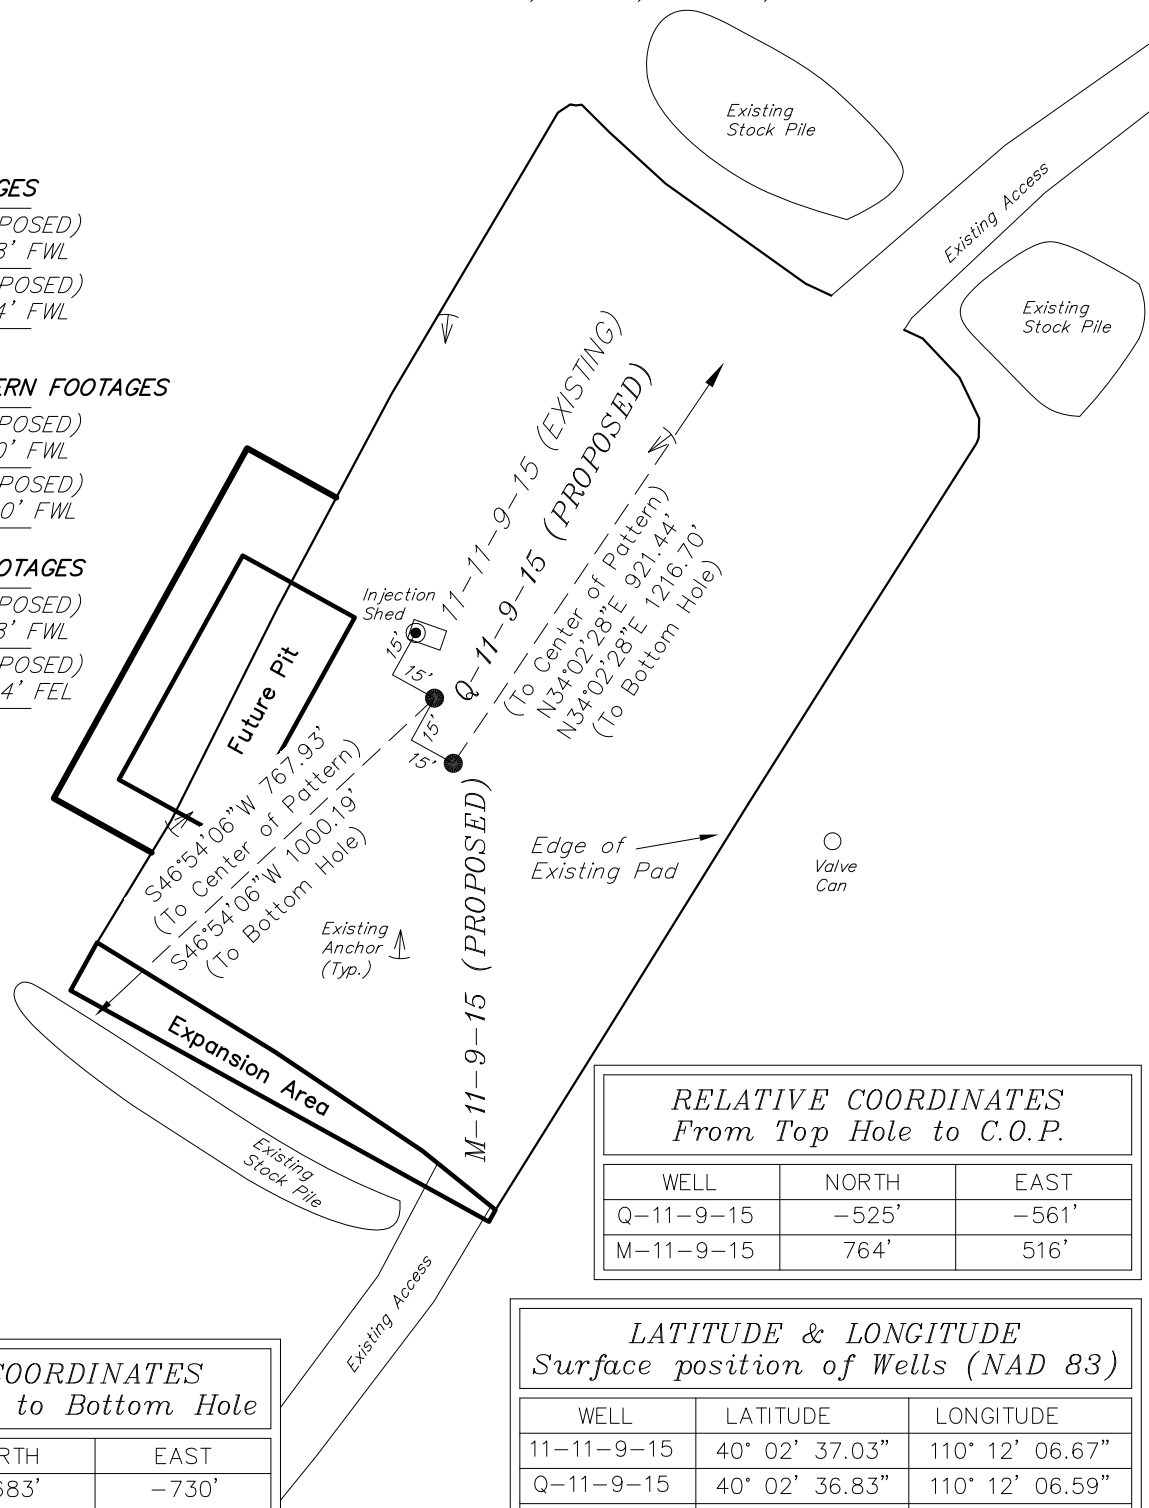

### RELATIVE COORDINATES From Top Hole to C.O.P.

WELL	NORTH	EAST
Q-11-9-15	-525'	-561'
M-11-9-15	764'	516'

### RELATIVE COORDINATES From Top Hole to Bottom Hole

WELL	NORTH	EAST
Q-11-9-15	-683'	-730'
M-11-9-15	1,008'	681'


### LATITUDE & LONGITUDE Surface position of Wells (NAD 83)

WELL	LATITUDE	LONGITUDE
11-11-9-15	40° 02' 37.03"	110° 12' 06.67"
Q-11-9-15	40° 02' 36.83"	110° 12' 06.59"
M-11-9-15	40° 02' 36.63"	110° 12' 06.52"

SURVEYED BY: K.S. DATE SURVEYED: 07-26-11 VERSION:  
 DRAWN BY: F.T.M. DATE DRAWN: 08-05-11  
 SCALE: 1" = 60' REVISED: V1

**Tri State** (435) 781-2501  
 Land Surveying, Inc.  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078


**RECEIVED: November 29, 2011**

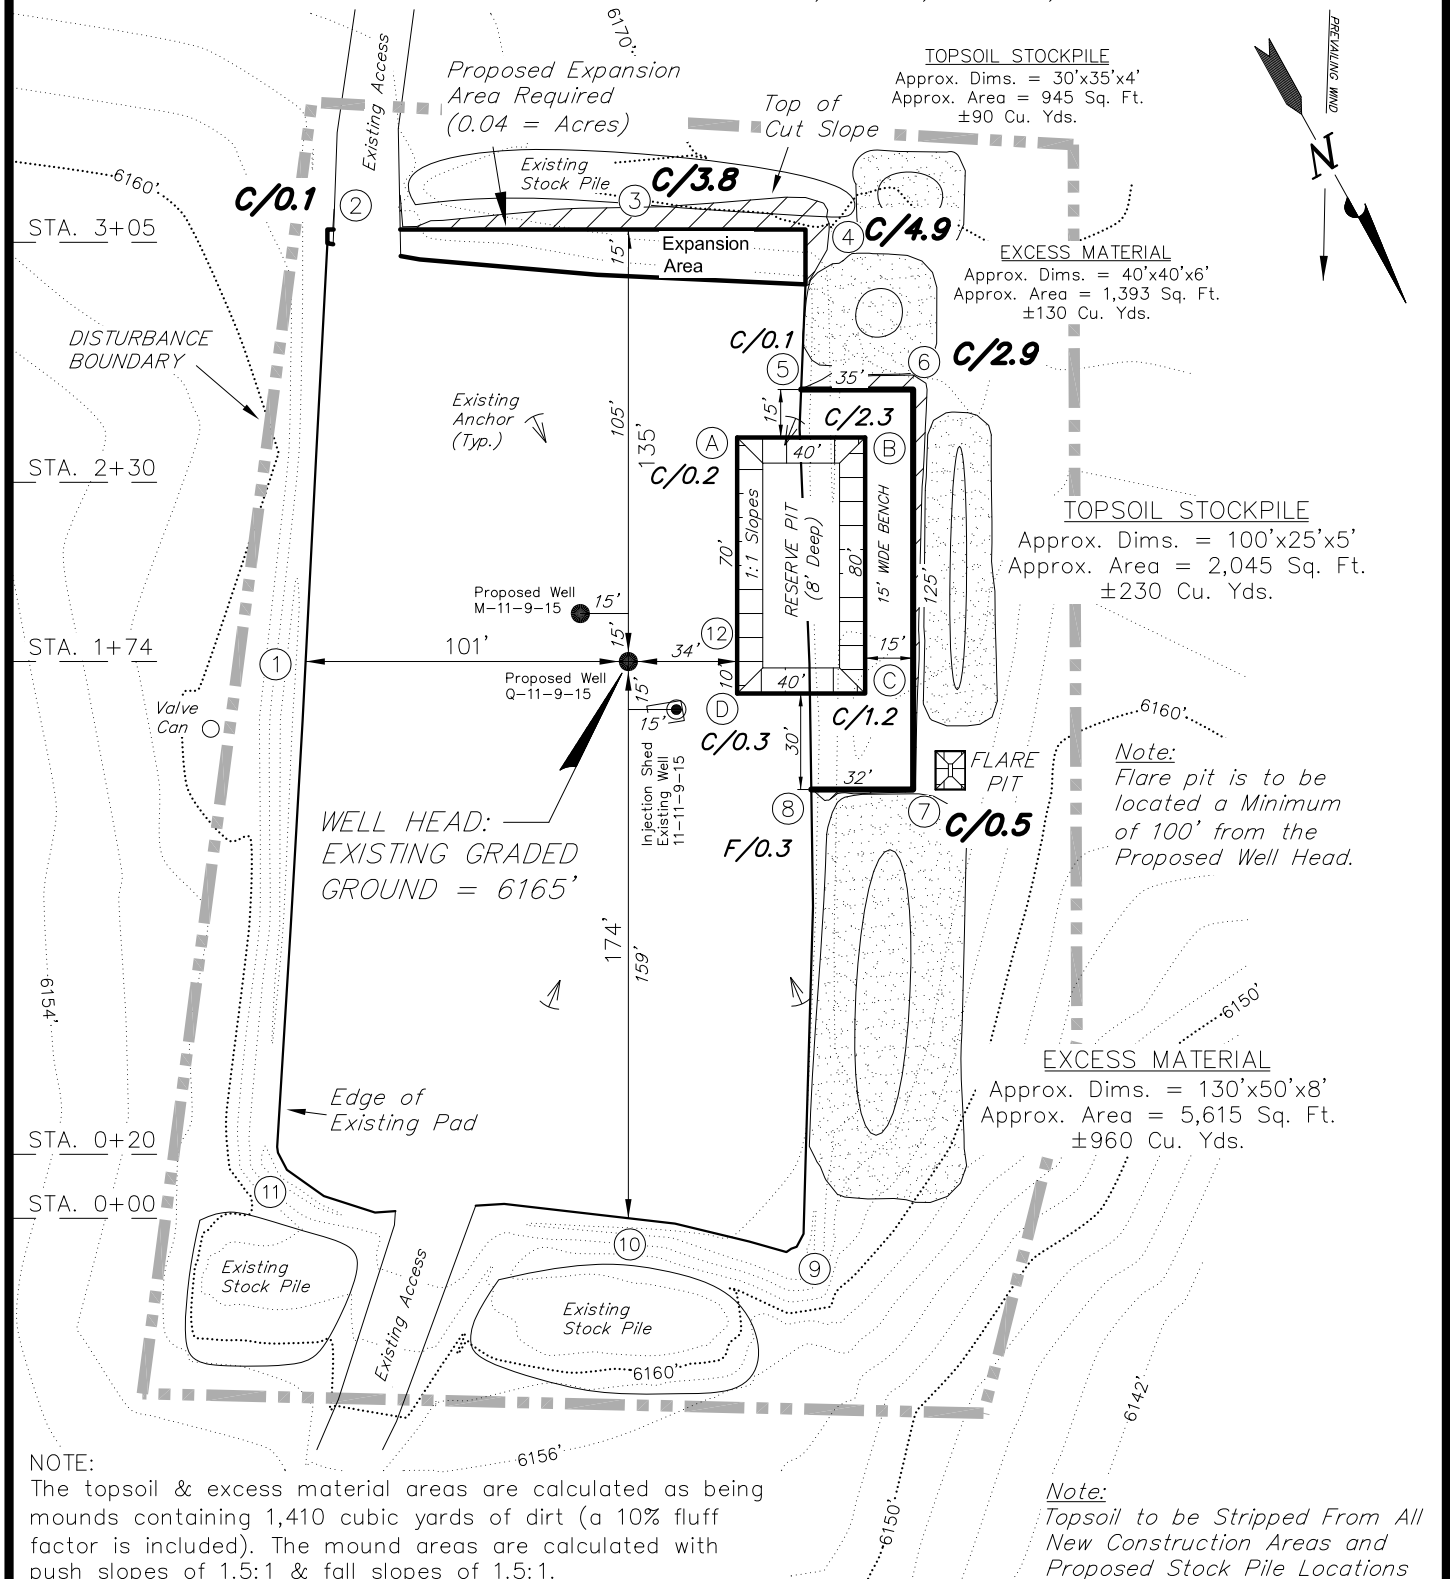**NEWFIELD EXPLORATION COMPANY****LOCATION LAYOUT****11-11-9-15 (Existing Well)****Q-11-9-15 (Proposed Well)****M-11-9-15 (Proposed Well)****Pad Location: NESW Section 11, T9S, R15E, S.L.B.&M.**

SURVEYED BY: K.S.	DATE SURVEYED: 07-26-11	VERSION:
DRAWN BY: F.T.M.	DATE DRAWN: 08-05-11	V1
SCALE: 1" = 60'	REVISED:	

**Tri State** (435) 781-2501  
**Land Surveying, Inc.**  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

**RECEIVED: November 29, 2011**

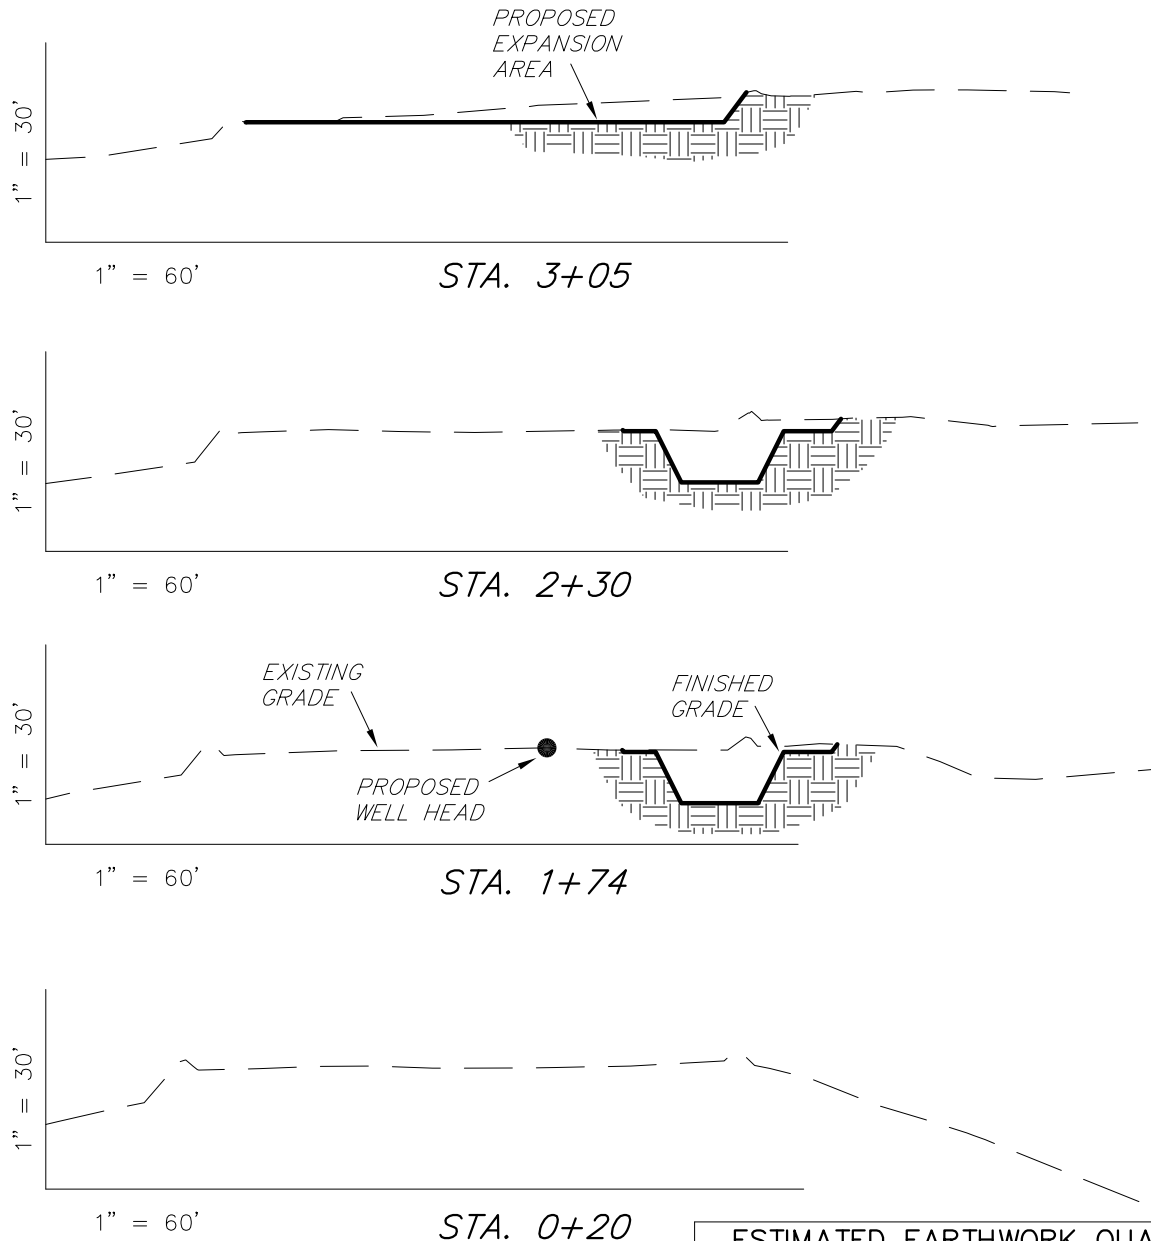***NEWFIELD EXPLORATION COMPANY******CROSS SECTIONS******11-11-9-15 (Existing Well)******Q-11-9-15 (Proposed Well)******M-11-9-15 (Proposed Well)******Pad Location: NESW Section 11, T9S, R15E, S.L.B.&M.***

NOTE:  
UNLESS OTHERWISE  
NOTED ALL CUT/FILL  
SLOPES ARE AT 1.5:1

**ESTIMATED EARTHWORK QUANTITIES**  
(No Shrink or swell adjustments have been used)  
(Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	300	0	Topsoil is not included in Pad Cut	300
PIT	690	0		690
TOTALS	990	0	290	990

SURVEYED BY: K.S.	DATE SURVEYED: 07-26-11	VERSION:
DRAWN BY: F.T.M.	DATE DRAWN: 08-05-11	V1
SCALE: 1" = 60'	REVISED:	

**Tri State**  
**Land Surveying, Inc.**  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078  
(435) 781-2501

**RECEIVED: November 29, 2011**



**RECEIVED: November 29, 2011**



*VIA ELECTRONIC DELIVERY*

November 30, 2011

State of Utah, Division of Oil, Gas and Mining  
ATTN: Diana Mason  
P.O. Box 145801  
Salt Lake City, UT 84114-5801

RE: Directional Drilling  
**GMBU Q-11-9-15**  
Greater Monument Butte (Green River) Unit

Surface Hole: T9S-R15E Section 11: NESW (UTU-74826)  
1965' FSL 1968' FWL

At Target: T9S-R15E Section 11: SWSW (UTU-74826)  
1294' FSL 1228' FWL

Duchesne County, Utah

Dear Ms. Mason:

Pursuant to the filing by Newfield Production Company (NPC) of an Application for Permit to Drill the above referenced well dated 11/29/2011, a copy of which is attached, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole and target locations of this well are both within the boundaries of the Greater Monument Butte Unit (UTU-87538X), of which Newfield certifies that it is the operator. Further, Newfield certifies that all lands within 460 feet of the entire directional well bore are within the Greater Monument Butte Unit.

NPC is permitting this well as a directional well in order to mitigate surface disturbance by utilizing pre-existing roads and pipelines.

NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please contact the undersigned at 303-383-4153 or by email at [pburns@newfield.com](mailto:pburns@newfield.com). Your consideration in this matter is greatly appreciated.

Sincerely,  
Newfield Production Company

A handwritten signature in blue ink, appearing to read "PB", with a stylized flourish at the end.

Peter Burns  
Land Associate

Form 3160-3  
(August 2007)UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENTFORM APPROVED  
OMB No. 1004-0136  
Expires July 31, 2010

## APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU74826
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator NEWFIELD PRODUCTION COMPANY Contact: MANDIE CROZIER Email: mcrozier@newfield.com		7. If Unit or CA Agreement, Name and No. GREATER MONUMENT
3a. Address ROUTE #3 BOX 3630 MYTON, UT 84052		8. Lease Name and Well No. GMBU Q-11-9-15
3b. Phone No. (include area code) Ph: 435-646-4825 Fx: 435-646-3031		9. API Well No.
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NESW 1965FSL 1968FWL At proposed prod. zone SWSW 1294FSL 1228FWL		10. Field and Pool, or Exploratory MONUMENT BUTTE
14. Distance in miles and direction from nearest town or post office* 15.0		11. Sec., T., R., M., or Blk. and Survey or Area Sec 11 T9S R15E Mer SLB
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1294'	16. No. of Acres in Lease 2189.90	12. County or Parish DUCHESNE
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 1038'	19. Proposed Depth 6445 MD 6355 TVD	13. State UT
21. Elevations (Show whether DF, KB, RT, GL, etc.) 6165 GL	22. Approximate date work will start 03/31/2012	17. Spacing Unit dedicated to this well 20.00
		20. BLM/BIA Bond No. on file WYB000493
		23. Estimated duration 7 DAYS

## 24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- |   |  |
|---|--|
| 1. Well plat certified by a registered surveyor.  | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).    |
| 2. A Drilling Plan.   | 5. Operator certification  |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature (Electronic Submission)	Name (Printed/Typed) MANDIE CROZIER Ph: 435-646-4825	Date 11/29/2011
Title REGULATORY ANALYST		
Approved by (Signature)	Name (Printed/Typed)	Date
Title	Office	

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.


## Additional Operator Remarks (see next page)



Electronic Submission #124391 verified by the BLM Well Information System  
For NEWFIELD PRODUCTION COMPANY, sent to the Vernal


\*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\*



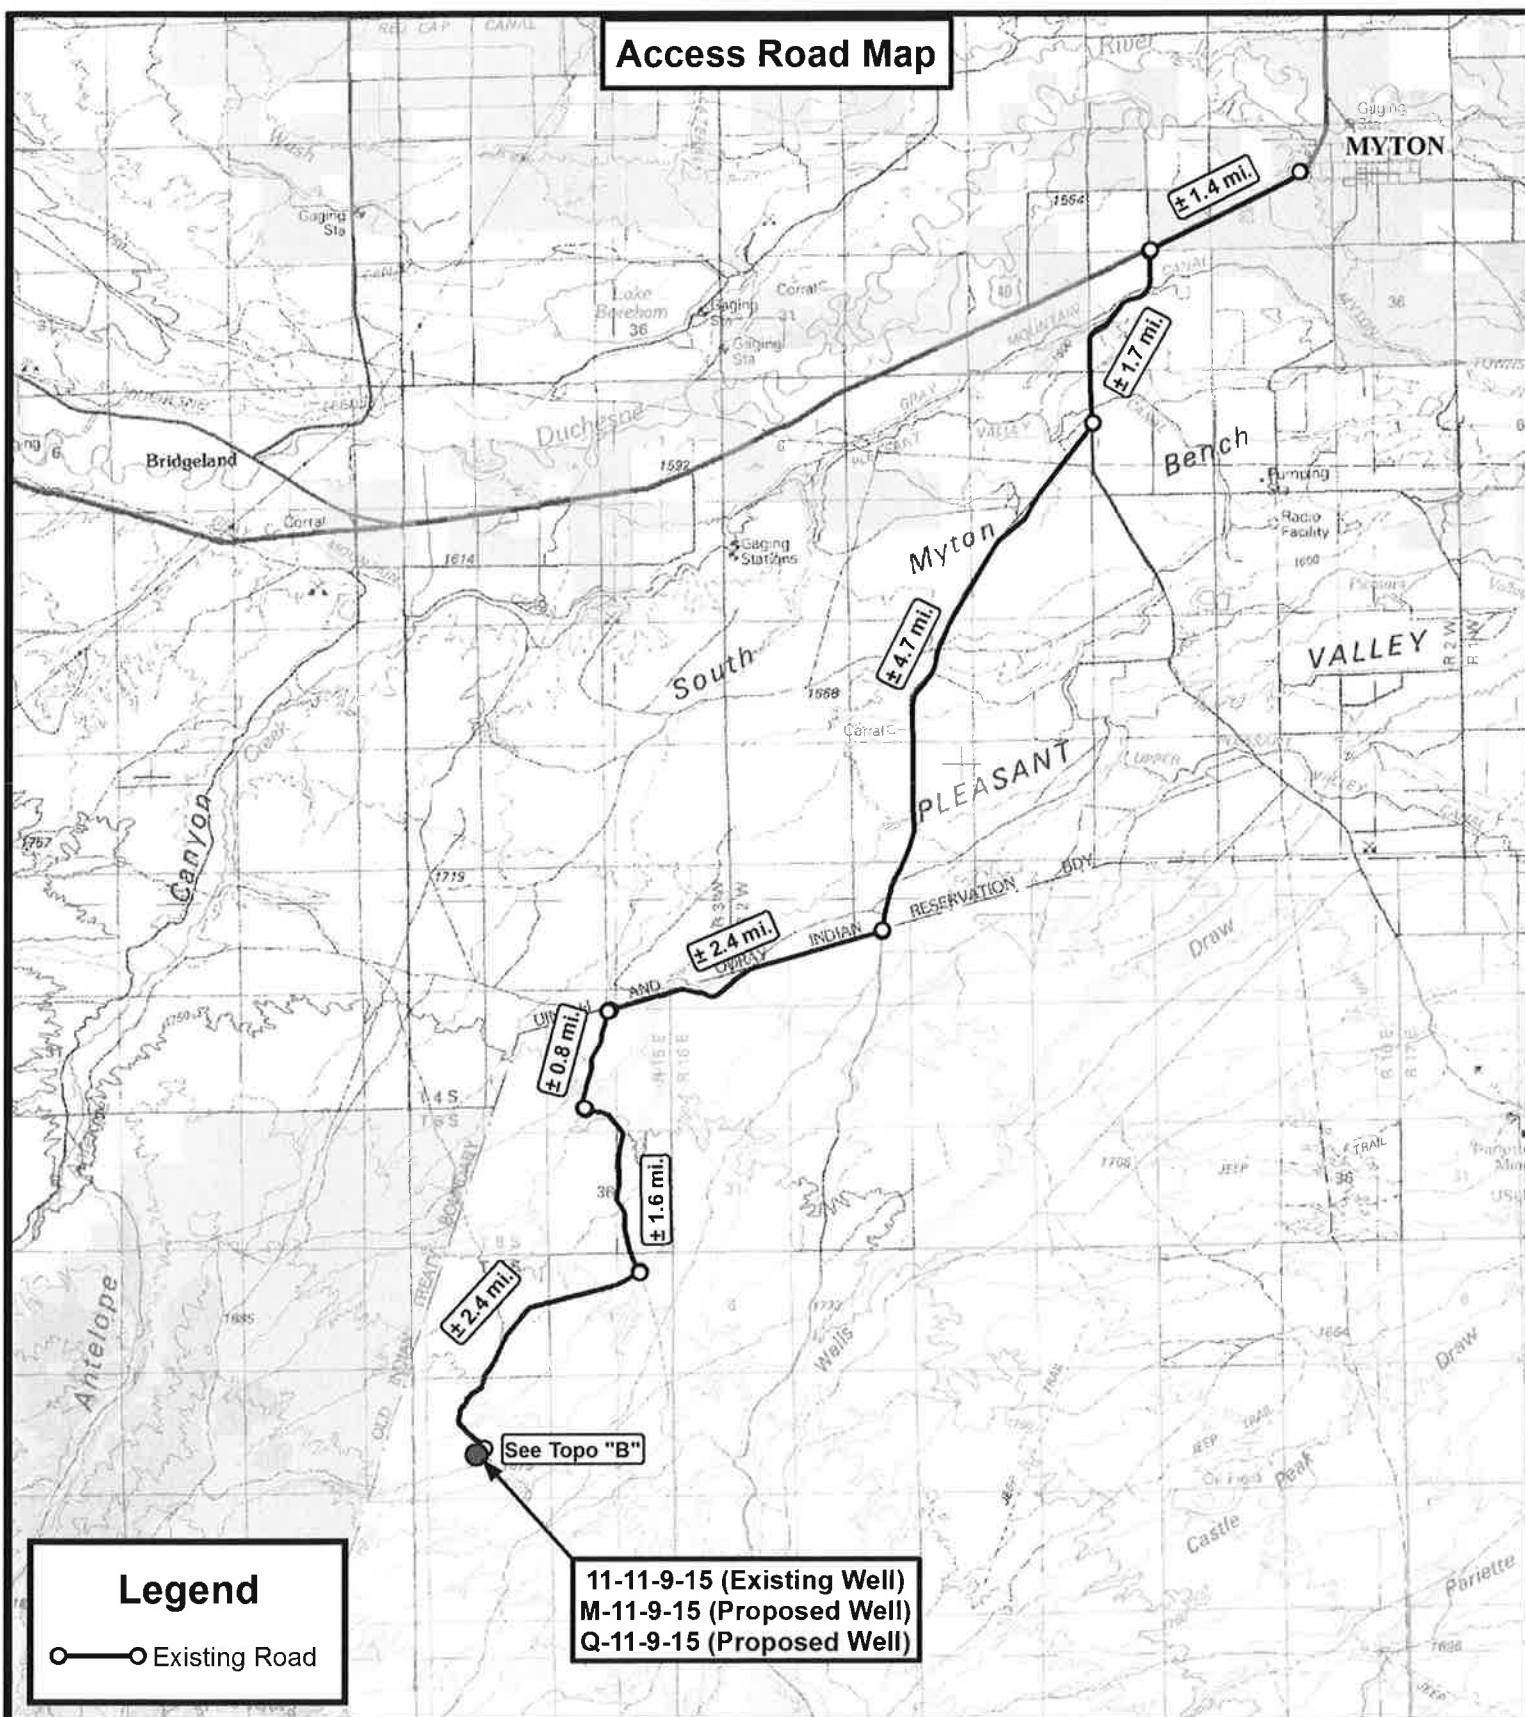



 <p><b>Tri State Land Surveying, Inc.</b> 180 NORTH VERNAL AVE. VERNAL, UTAH 84078</p>	<p>P: (435) 781-2501 F: (435) 781-2518</p>	<p>N</p> 	<p><b><u>NEWFIELD EXPLORATION COMPANY</u></b></p> <p>11-11-9-15 (Existing Well) M-11-9-15 (Proposed Well) Q-11-9-15 (Proposed Well)</p> <p><b>SEC. 11, T9S, R15E, S.L.B.&amp;M. Duchesne County, UT.</b></p>												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">DRAWN BY:</td> <td style="width: 30%;">D.C.R.</td> <td style="width: 30%;">REVISED:</td> <td style="width: 10%;"></td> </tr> <tr> <td>DATE:</td> <td>08-03-2011</td> <td></td> <td></td> </tr> <tr> <td>SCALE:</td> <td>1:100,000</td> <td></td> <td></td> </tr> </table>	DRAWN BY:	D.C.R.	REVISED:		DATE:	08-03-2011			SCALE:	1:100,000			<p><b>VERSION:</b></p> <p><b>V1</b></p>		<p><b>TOPOGRAPHIC MAP</b></p> <p><b>SHEET</b> <b>A</b></p>
DRAWN BY:	D.C.R.	REVISED:													
DATE:	08-03-2011														
SCALE:	1:100,000														

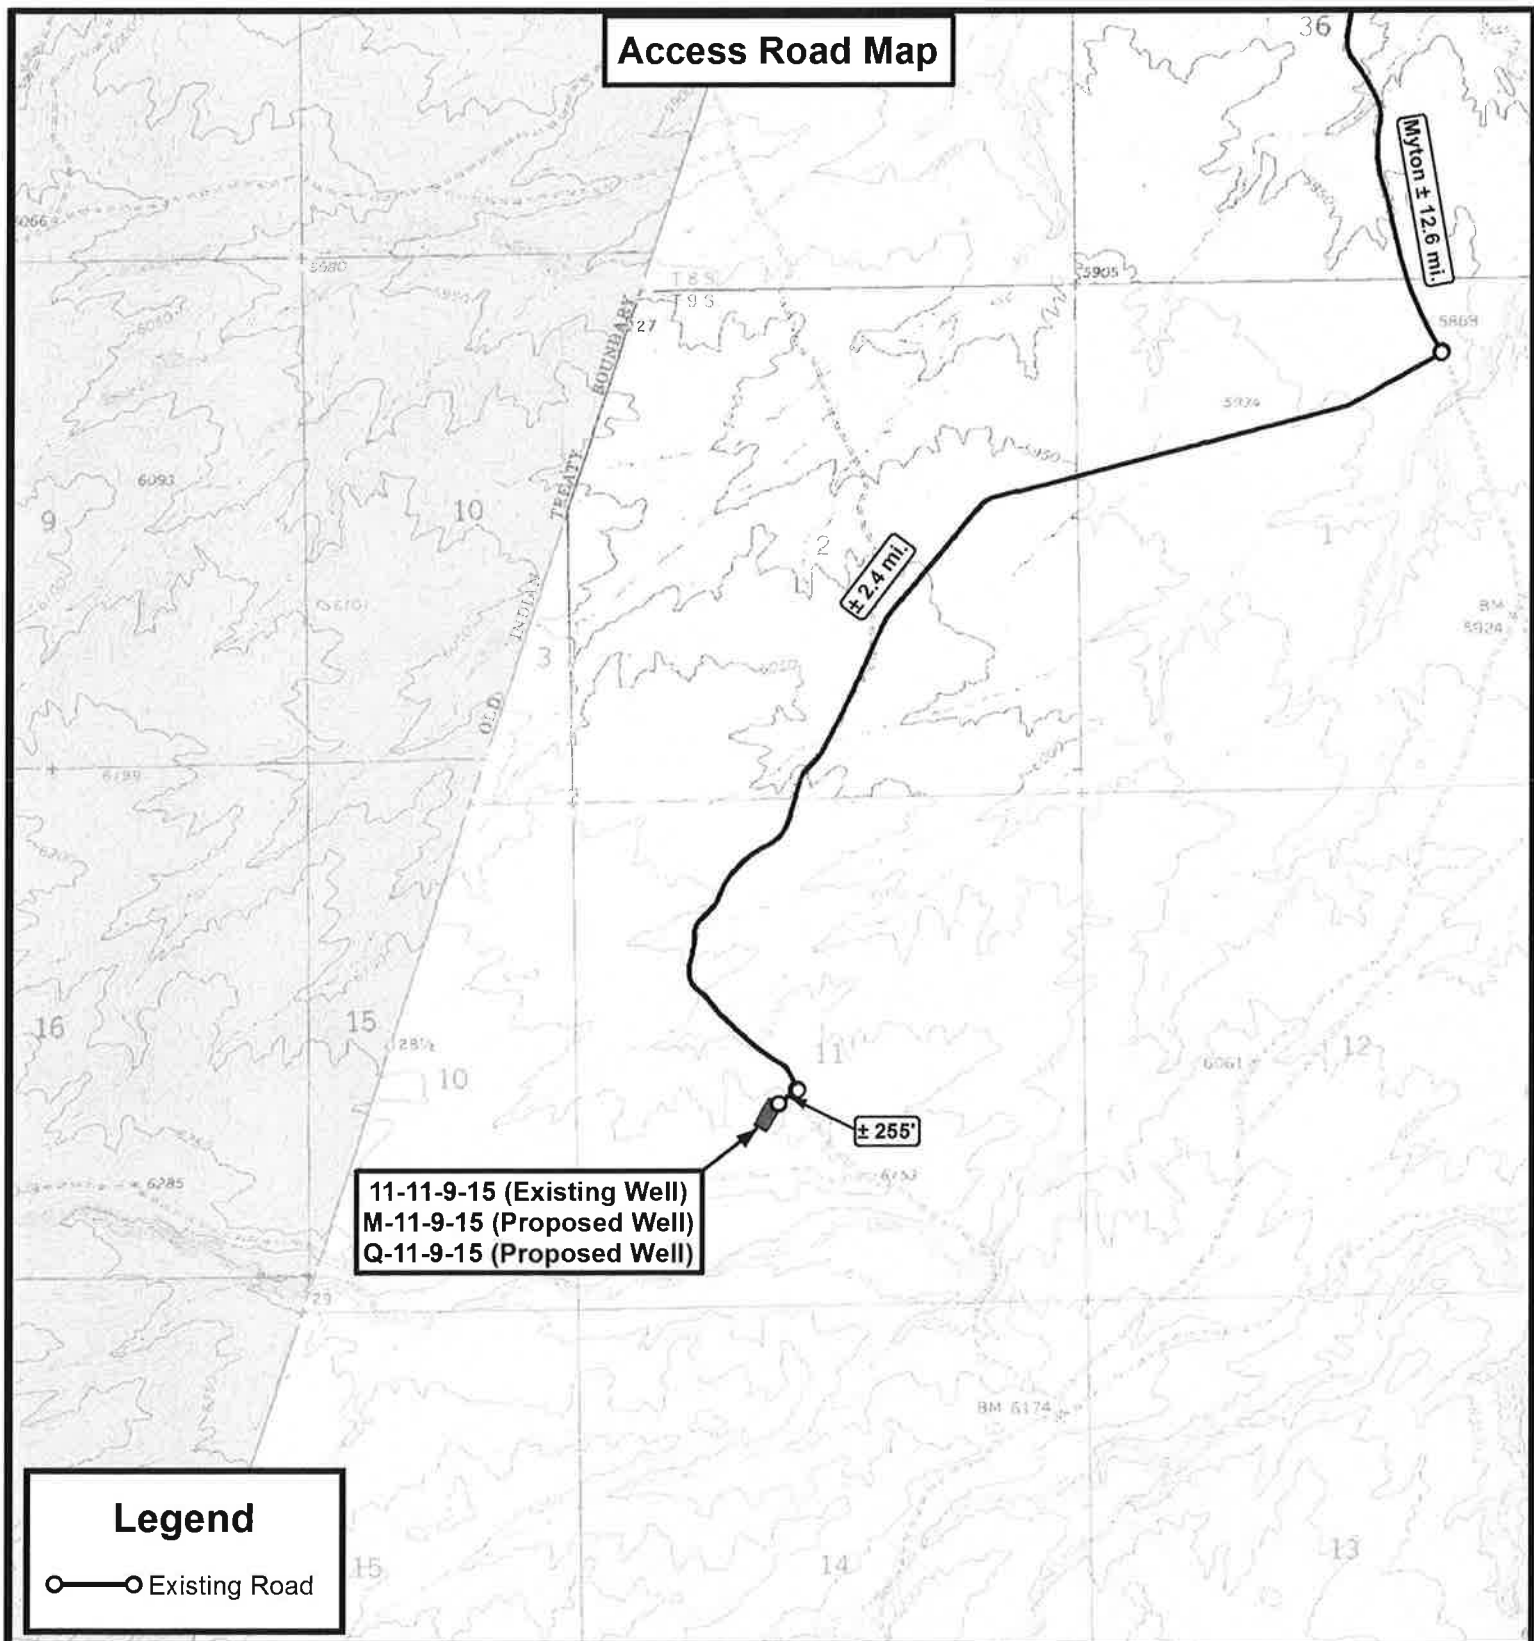

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



**Tri State  
Land Surveying, Inc.**

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
F: (435) 781-2518



## NEWFIELD EXPLORATION COMPANY

11-11-9-15 (Existing Well)

M-11-9-15 (Proposed Well)

Q-11-9-15 (Proposed Well)


SEC. 11, T9S, R15E, S.L.B.&M. Duchesne County, UT.

DRAWN BY:	D.C.R.	REVISED:	VERSION:
DATE:	08-03-2011		V1
SCALE:	1" = 2,000'		

**TOPOGRAPHIC MAP**



SHEET  
**B**



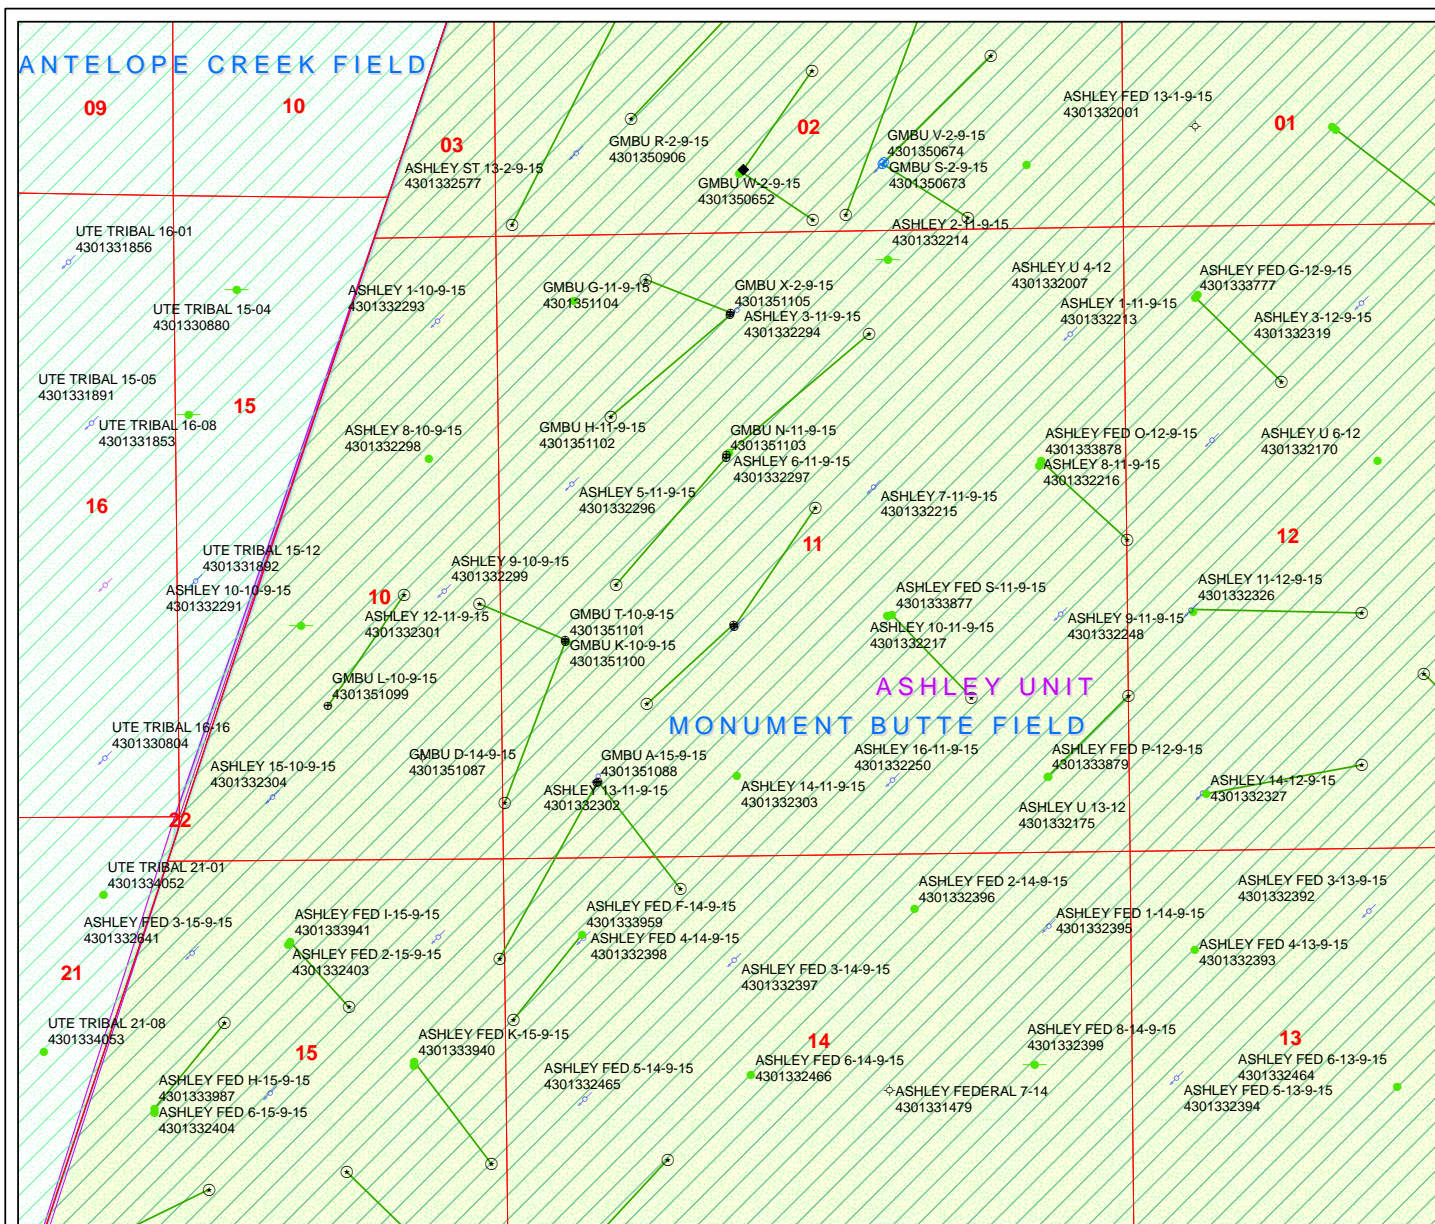

**API Number: 4301351091**  
**Well Name: GMBU Q-11-9-15**  
**Township T0.9. Range R1.5. Section 11**  
**Meridian: SLBM**  
**Operator: NEWFIELD PRODUCTION COMPANY**  
 Map Prepared:  
 Map Produced by Diana Mason

Units	Wells Query
ACTIVE	APD - Approved Permit
EXPLORATORY	DRL - Spudded (Drilling Commenced)
GAS STORAGE	GW - Gas Injection
NF PP OIL	GS - Gas Storage
NF SECONDARY	LA - Location Abandoned
PI OIL	LOC - New Location
PP GAS	OPS - Operation Suspended
PP GEOTHERM	PA - Plugged Abandoned
PP OIL	PGW - Producing Gas Well
SECONDARY	POW - Producing Oil Well
TERMINATED	RET - Returned APD
Fields	SGW - Shut-in Gas Well
Unknown	SOW - Shut-in Oil Well
ABANDONED	TA - Temp. Abandoned
ACTIVE	TW - Test Well
INACTIVE	WDW - Water Disposal
COMBINED	WW - Water Injection Well
STORAGE	WSW - Water Supply Well
TERMINATED	

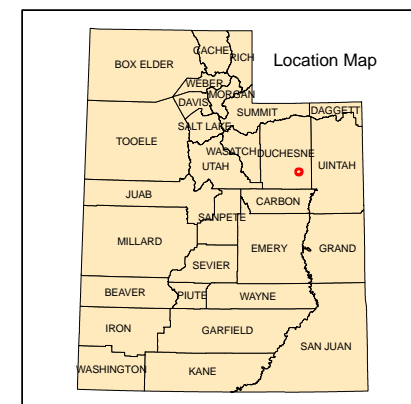

# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:  
3160  
(UT-922)

December 2, 2011

Memorandum

To: Assistant District Manager Minerals, Vernal District  
From: Michael Coulthard, Petroleum Engineer  
Subject: 2011 Plan of Development Greater Monument  
Butte Unit, Duchesne and Uintah Counties,  
Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2011 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

API#	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-51083	GMBU Y-33-8-17	Sec 05 T09S R17E 0827 FNL 0655 FEL BHL Sec 33 T08S R17E 0074 FSL 0094 FWL
43-013-51084	GMBU I-33-8-17	Sec 33 T08S R17E 1969 FNL 0867 FEL BHL Sec 33 T08S R17E 1112 FNL 1524 FEL
43-013-51085	GMBU O-34-8-17	Sec 33 T08S R17E 1989 FNL 0875 FEL BHL Sec 34 T08S R17E 2440 FSL 0303 FWL
43-013-51086	GMBU I-13-9-15	Sec 13 T09S R15E 2083 FNL 0422 FEL BHL Sec 13 T09S R15E 1151 FNL 1454 FEL
43-013-51087	GMBU D-14-9-15	Sec 11 T09S R15E 0646 FSL 0810 FWL BHL Sec 14 T09S R15E 0274 FNL 1491 FWL
43-013-51088	GMBU A-15-9-15	Sec 11 T09S R15E 0631 FSL 0796 FWL BHL Sec 15 T09S R15E 0170 FNL 0244 FEL
43-013-51089	GMBU O-18-9-16	Sec 13 T09S R15E 2095 FNL 0404 FEL BHL Sec 18 T09S R16E 2399 FSL 0237 FWL
43-013-51090	GMBU M-11-9-15	Sec 11 T09S R15E 1945 FSL 1974 FWL BHL Sec 11 T09S R15E 2338 FNL 2624 FEL
43-013-51091	GMBU Q-11-9-15	Sec 11 T09S R15E 1965 FSL 1968 FWL BHL Sec 11 T09S R15E 1294 FSL 1228 FWL

**RECEIVED: December 02, 2011**

API #	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-51099	GMBU L-10-9-15	Sec 10 T09S R15E 1964 FSL 1696 FEL BHL Sec 10 T09S R15E 2362 FNL 1015 FEL
43-013-51100	GMBU K-10-9-15	Sec 11 T09S R15E 1851 FSL 0546 FWL BHL Sec 10 T09S R15E 2440 FNL 0380 FEL
43-013-51101	GMBU T-10-9-15	Sec 11 T09S R15E 1830 FSL 0546 FWL BHL Sec 10 T09S R15E 1142 FSL 0201 FEL
43-013-51102	GMBU H-11-9-15	Sec 11 T09S R15E 1880 FNL 1925 FWL BHL Sec 11 T09S R15E 0873 FNL 2158 FEL
43-013-51103	GMBU N-11-9-15	Sec 11 T09S R15E 1900 FNL 1920 FWL BHL Sec 11 T09S R15E 2310 FSL 0981 FWL
43-013-51104	GMBU G-11-9-15	Sec 11 T09S R15E 0696 FNL 1969 FWL BHL Sec 11 T09S R15E 1538 FNL 0953 FWL
43-013-51105	GMBU X-2-9-15	Sec 11 T09S R15E 0675 FNL 1974 FWL BHL Sec 02 T09S R15E 0304 FSL 1026 FWL
43-013-51106	GMBU R-12-9-15	Sec 12 T09S R15E 0739 FSL 2044 FEL BHL Sec 12 T09S R15E 1470 FSL 2497 FWL
43-013-51107	GMBU B-13-9-15	Sec 12 T09S R15E 0718 FSL 2047 FEL BHL Sec 13 T09S R15E 0343 FNL 0836 FEL
43-013-51108	GMBU N-5-9-16	Sec 05 T09S R16E 2032 FNL 1795 FWL BHL Sec 05 T09S R16E 2246 FSL 1175 FWL

This office has no objection to permitting the wells at this time.

Michael L. Coulthard

Digitally signed by Michael L. Coulthard  
DN: cn=Michael L. Coulthard, o=Bureau of Land Management,  
ou=Branch of Minerals, email=Michael\_Coulthard@blm.gov, c=US  
Date: 2011.12.02 10:10:47 -0700

bcc: File - Greater Monument Butte Unit  
Division of Oil Gas and Mining  
Central Files  
Agr. Sec. Chron  
Fluid Chron


MCoulthard:mc:12-2-11

**RECEIVED: December 02, 2011**







Project: USGS Myton SW (UT)  
 Site: SECTION 5 T9S, R17E  
 Well: Y-33-8-17  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.34°

Magnetic Field  
 Strength: 52320.1snT  
 Dip Angle: 65.83°  
 Date: 2/21/2011  
 Model: IGRF2010

KOP @ 600'  
 DOGLENG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

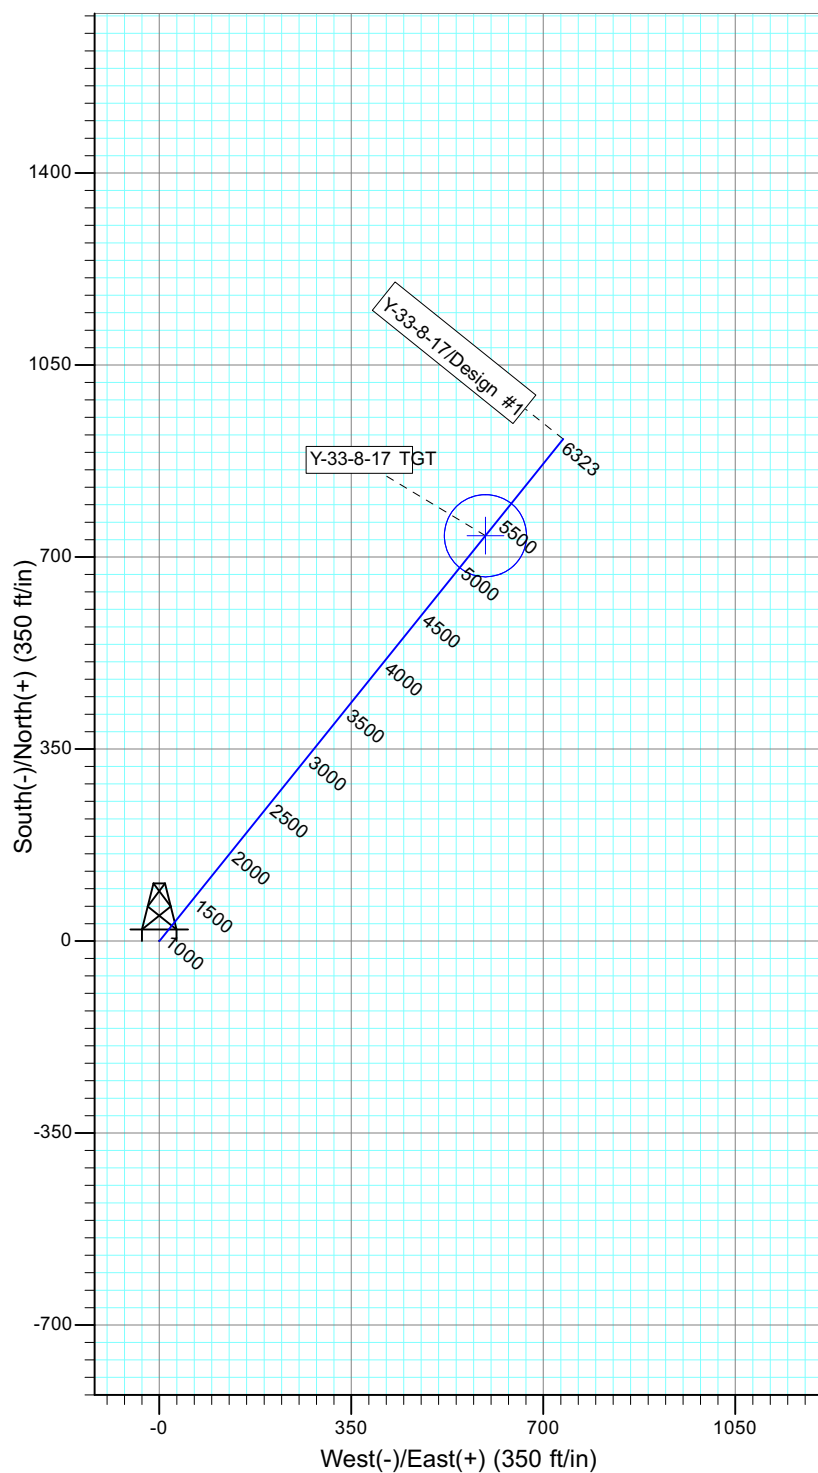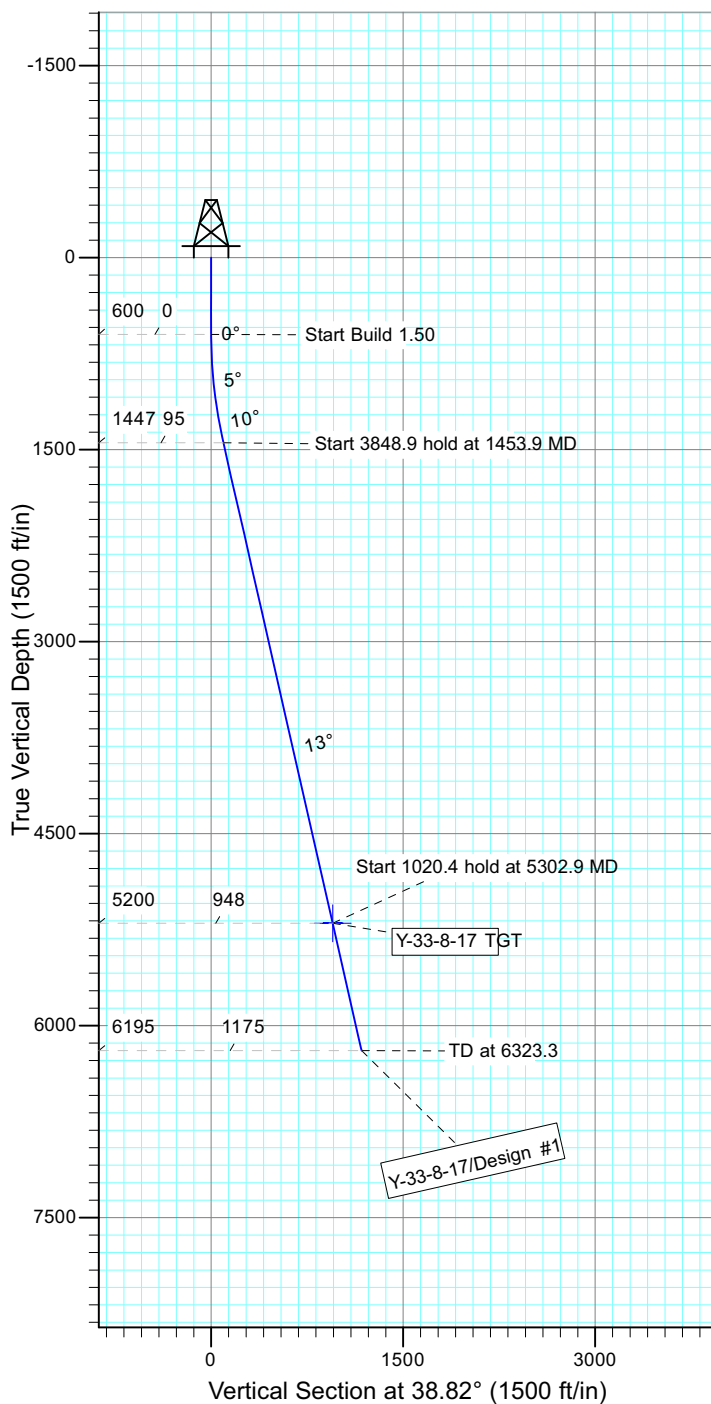

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
Y-33-8-17 TGT	5200.0	738.9	594.5	Circle (Radius: 75.0)

## SECTION DETAILS


Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1453.9	12.81	38.82	1446.8	74.1	59.6	1.50	38.82	95.1	
4	5302.9	12.81	38.82	5200.0	738.9	594.5	0.00	0.00	948.4	Y-33-8-17 TGT
5	6323.3	12.81	38.82	6195.0	915.2	736.3	0.00	0.00	1174.6	



API Well Number: 43013510940000





Project: USGS Myton SW (UT)  
 Site: SECTION 33 T8S R17E  
 Well: I-33-8-17  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.33°

Magnetic Field  
 Strength: 52329.4snT  
 Dip Angle: 65.84°  
 Date: 2011/02/21  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

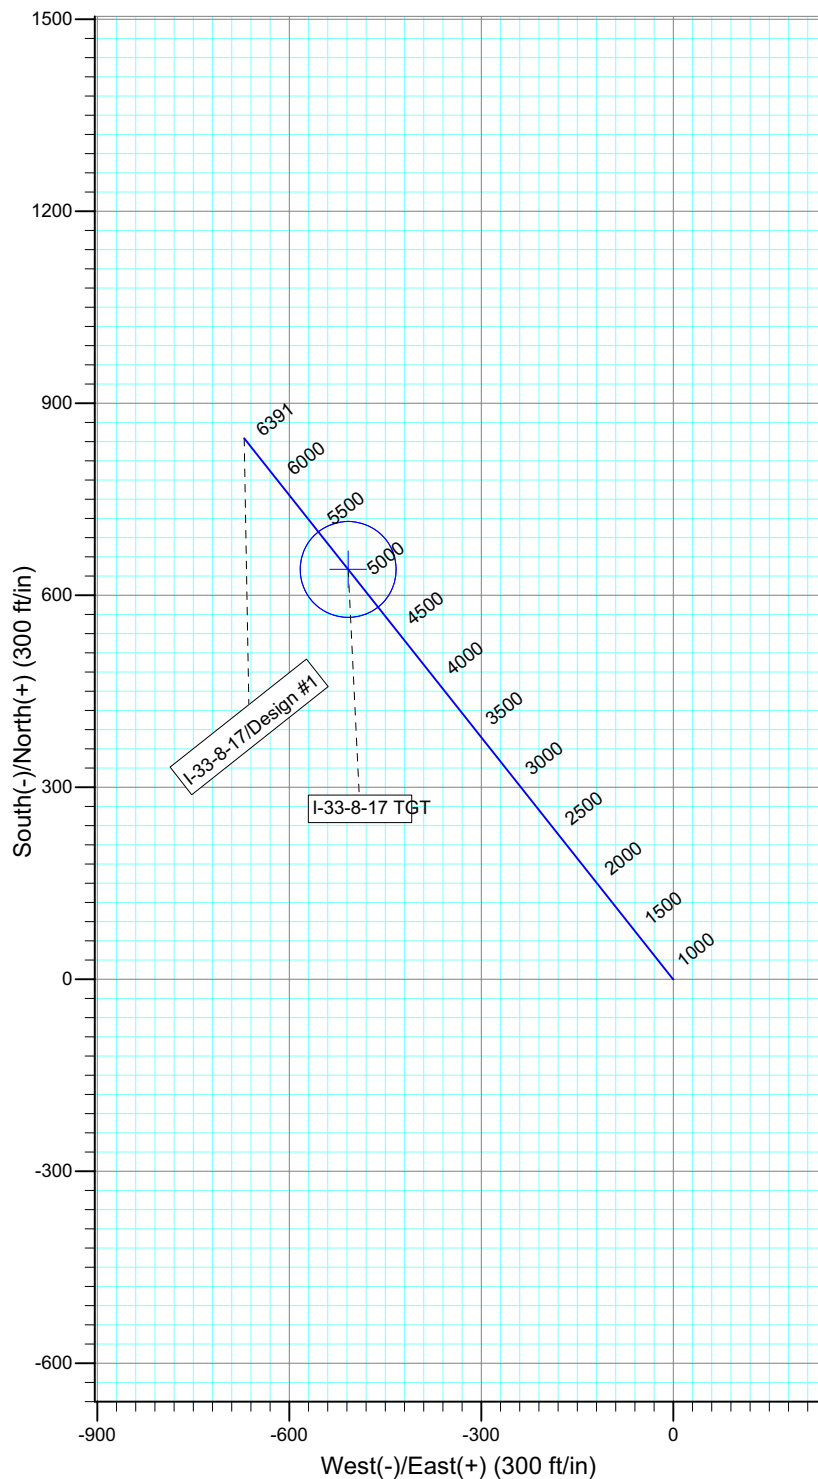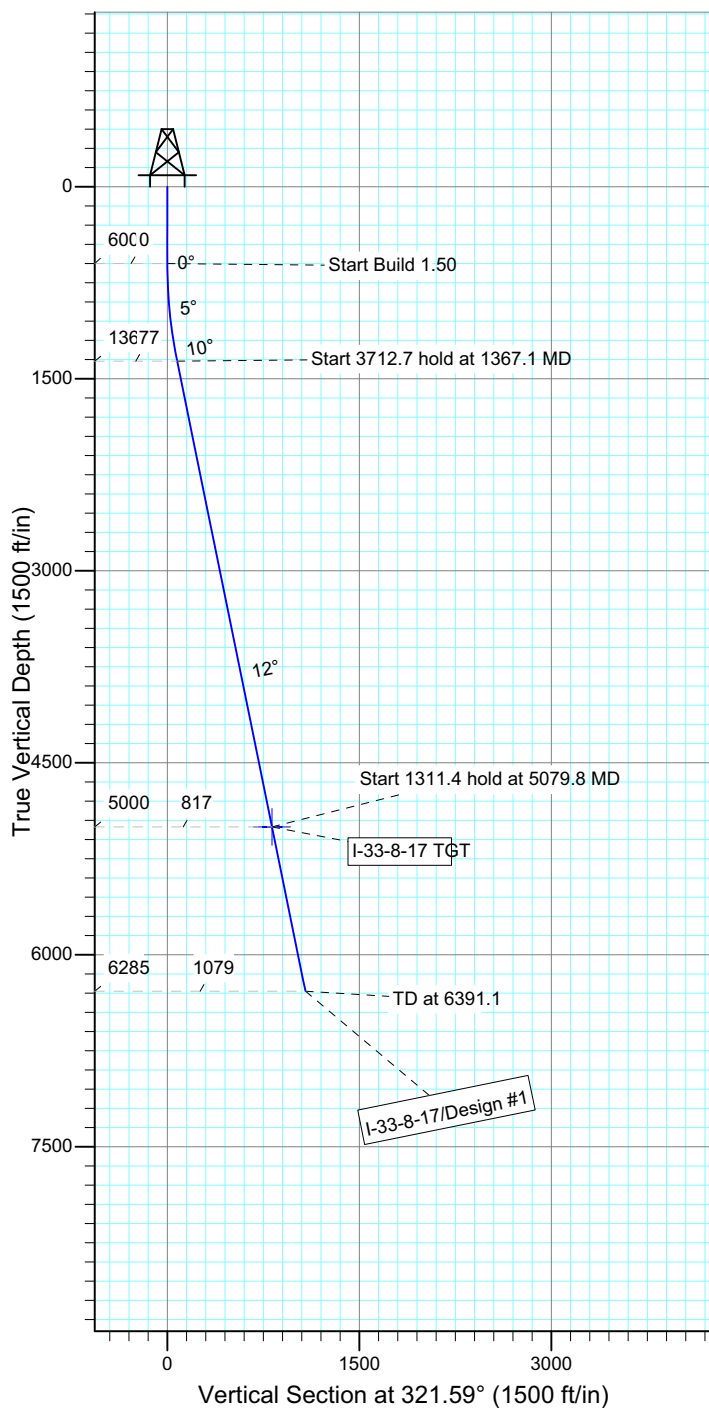

#### WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
I-33-8-17 TGT	5000.0	640.5	-507.8	Circle (Radius: 75.0)


#### SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1367.1	11.51	321.59	1362.0	60.2	-47.7	1.50	321.59	76.8	
4	5079.8	11.51	321.59	5000.0	640.5	-507.8	0.00	0.00	817.4	I-33-8-17 TGT
5	6391.1	11.51	321.59	6285.0	845.5	-670.3	0.00	0.00	1079.0	







Project: USGS Myton SW (UT)  
 Site: SECTION 33 T8S R17E  
 Well: O-34-8-17  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.33°

Magnetic Field  
 Strength: 52329.4snT  
 Dip Angle: 65.84°  
 Date: 2/21/2011  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

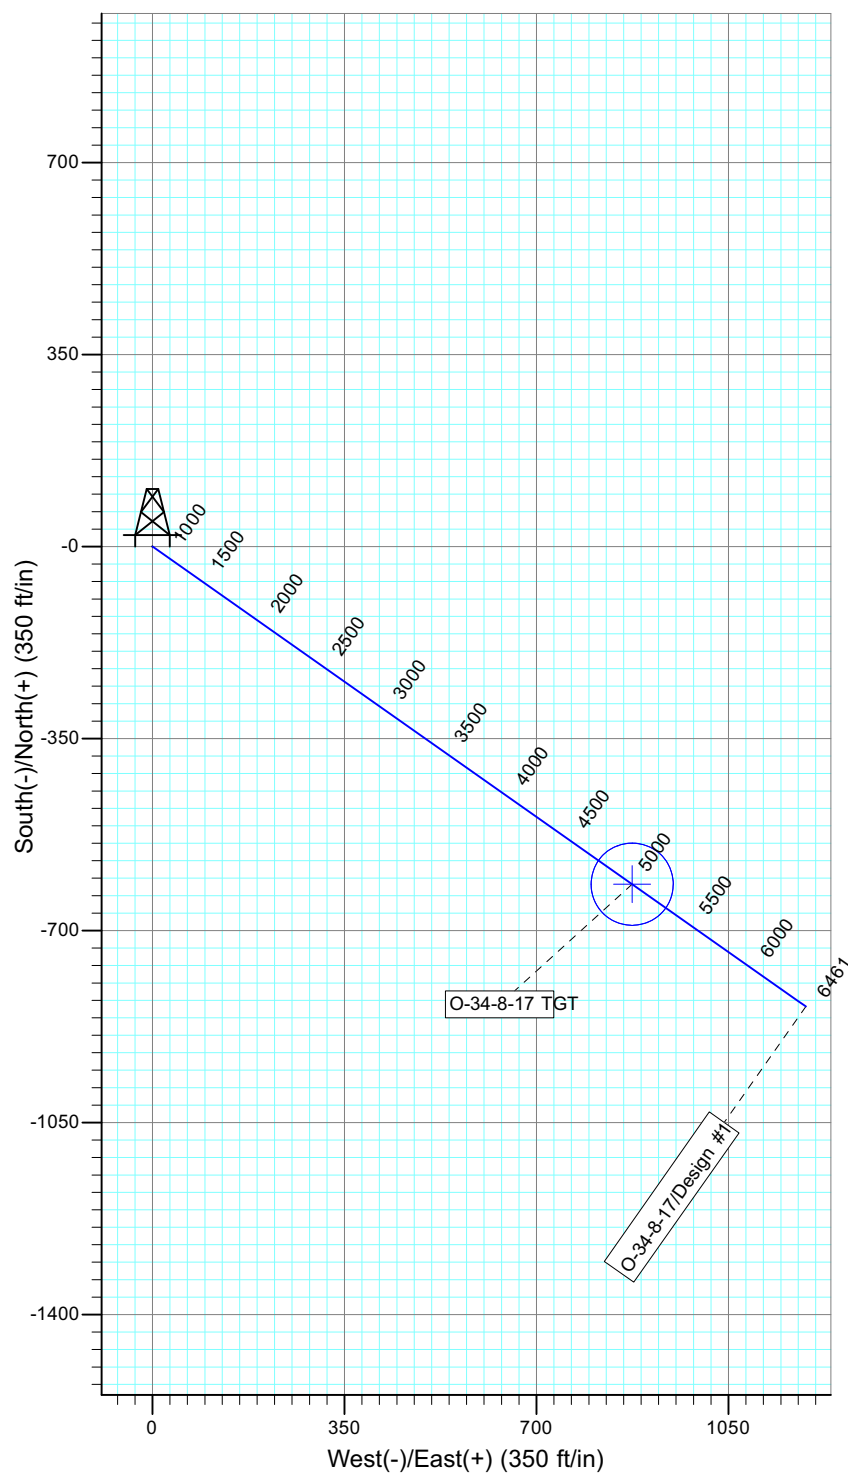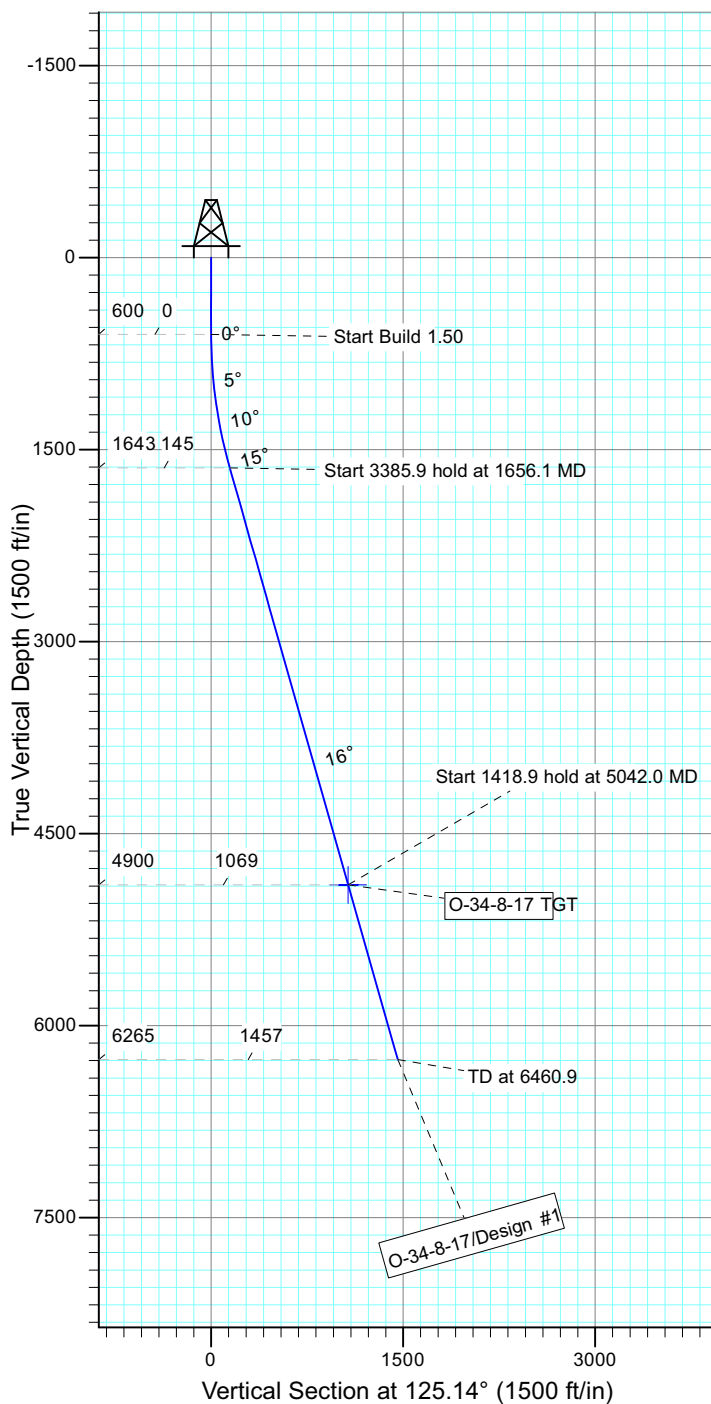

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
O-34-8-17 TGT	4900.0	-615.5	874.5	Circle (Radius: 75.0)

## SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1656.1	15.84	125.14	1642.7	-83.5	118.6	1.50	125.14	145.1	
4	5042.0	15.84	125.14	4900.0	-615.5	874.5	0.00	0.00	1069.4	O-34-8-17 TGT
5	6460.9	15.84	125.14	6265.0	-838.4	1191.2	0.00	0.00	1456.7	






API Well Number: 43013510960000





Project: USGS Myton SW (UT)  
 Site: SECTION 13 T9, R15  
 Well: I-13-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.33°

Magnetic Field  
 Strength: 52228.0snT  
 Dip Angle: 65.76°  
 Date: 2011/08/11  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

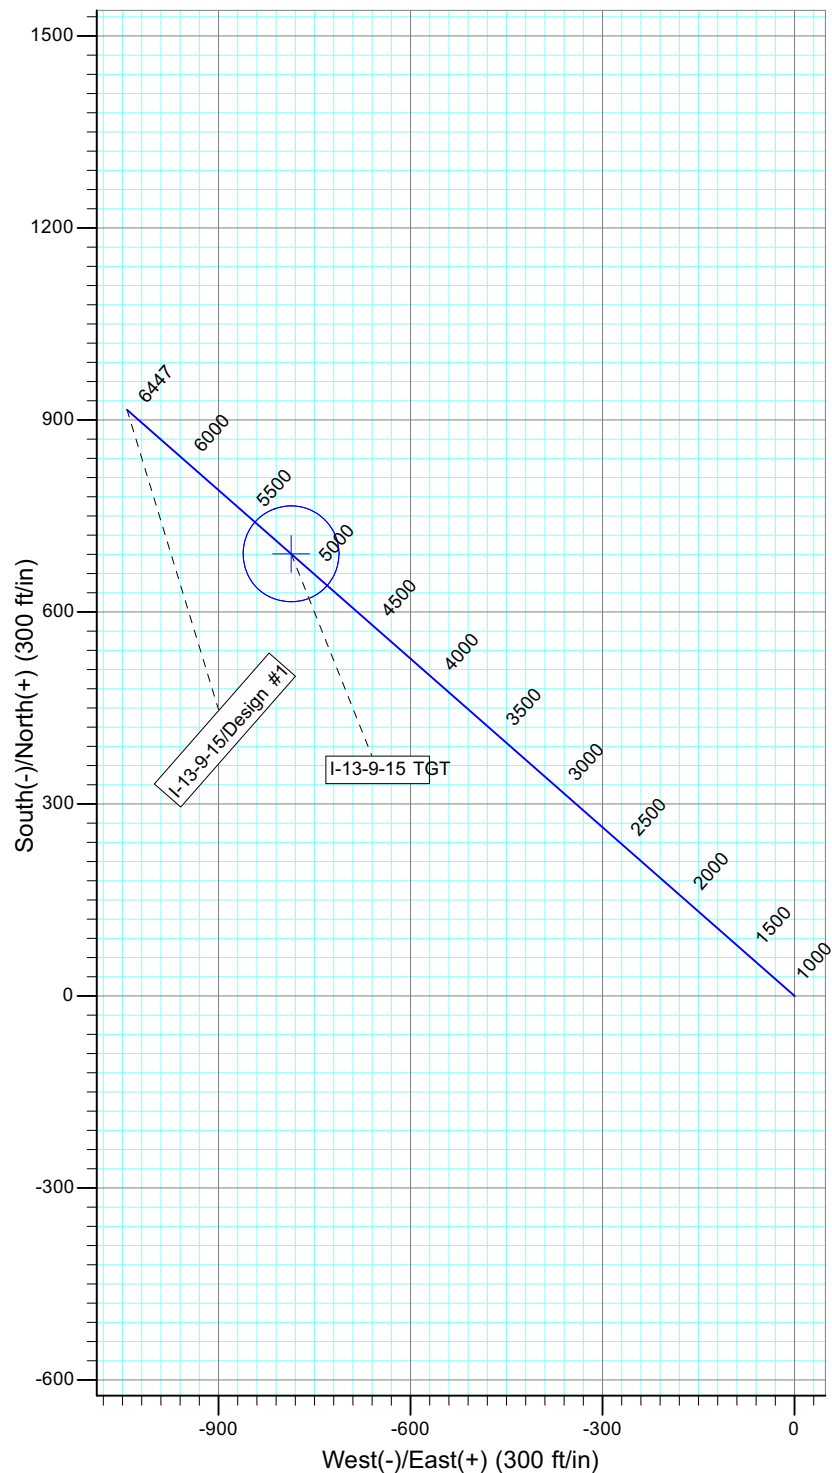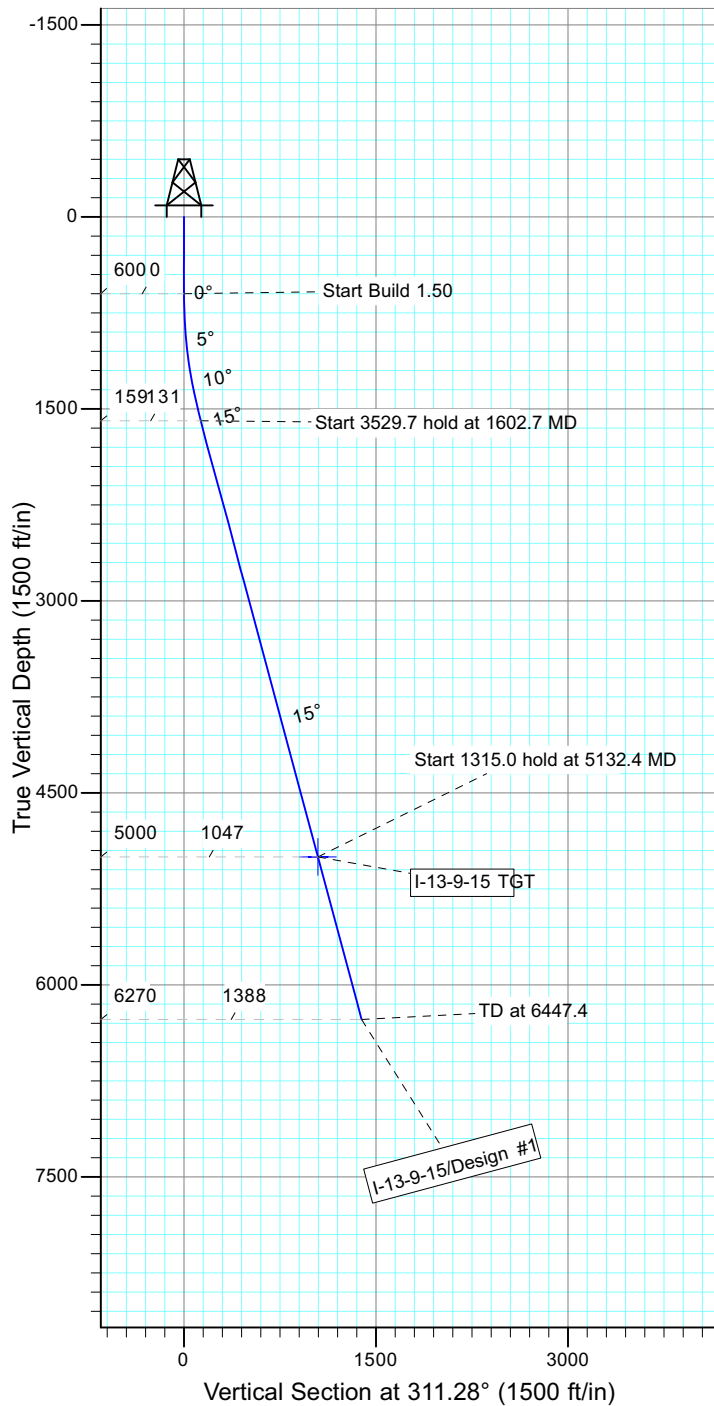

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
I-13-9-15 TGT	5000.0	690.6	-786.7	Circle (Radius: 75.0)

## SECTION DETAILS


Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1602.7	15.04	311.28	1591.2	86.3	-98.3	1.50	311.28	130.8	
4	5132.4	15.04	311.28	5000.0	690.6	-786.7	0.00	0.00	1046.8	I-13-9-15 TGT
5	6447.4	15.04	311.28	6270.0	915.7	-1043.1	0.00	0.00	1388.0	



API Well Number: 43013510970000





Project: USGS Myton SW (UT)  
 Site: SECTION 11 T 9S R15E  
 Well: D-14-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.35°

Magnetic Field  
 Strength: 52226.8snT  
 Dip Angle: 65.76°  
 Date: 2011/08/11  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

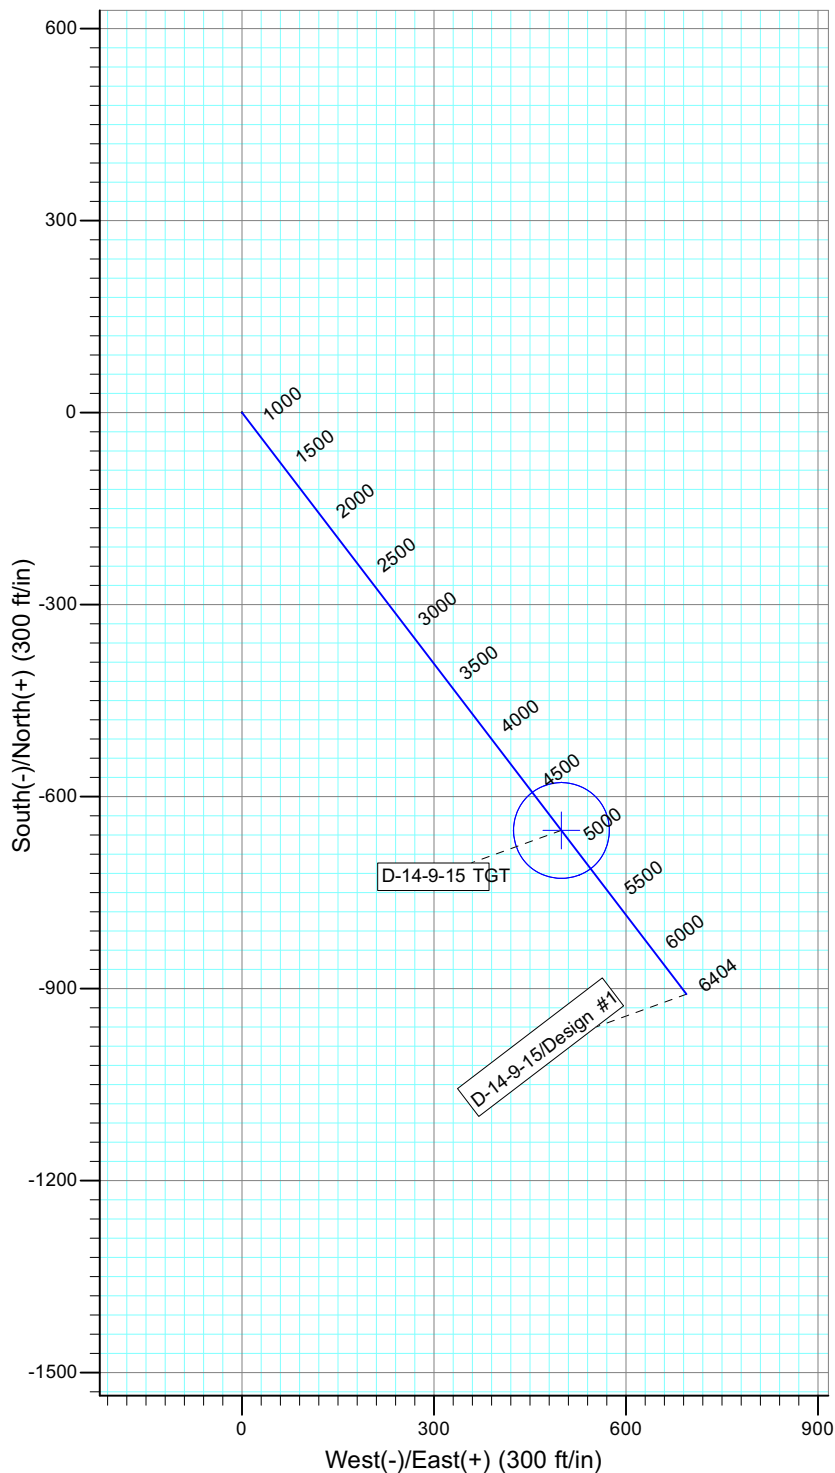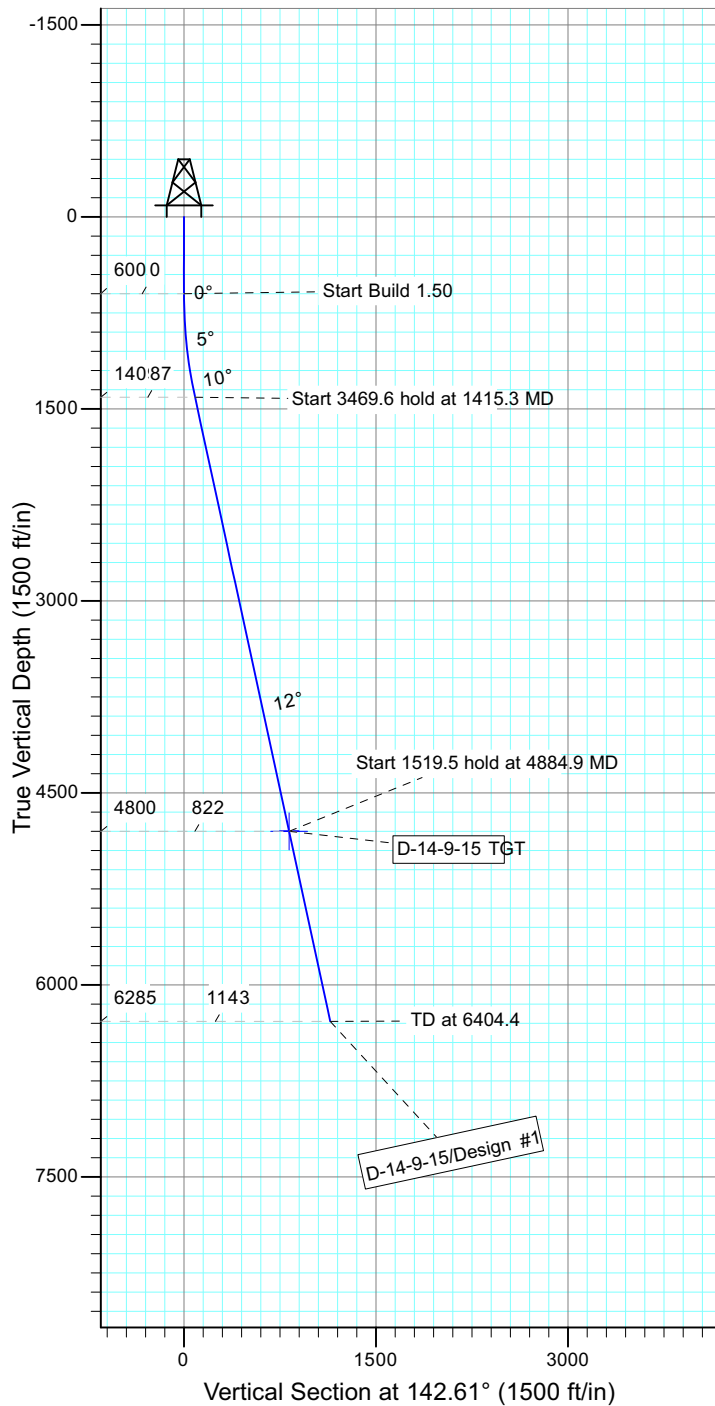

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
D-14-9-15 TGT	4800.0	-652.8	498.9	Circle (Radius: 75.0)

## SECTION DETAILS


Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1415.3	12.23	142.61	1409.1	-68.9	52.6	1.50	142.61	86.7	
4	4884.9	12.23	142.61	4800.0	-652.8	498.9	0.00	0.00	821.6	D-14-9-15 TGT
5	6404.4	12.23	142.61	6285.0	-908.5	694.4	0.00	0.00	1143.5	



API Well Number: 43013510980000





Project: USGS Myton SW (UT)  
 Site: SECTION 11 T 9S R15E  
 Well: A-15-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.35°

Magnetic Field  
 Strength: 52226.7snT  
 Dip Angle: 65.76°  
 Date: 2011/08/11  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

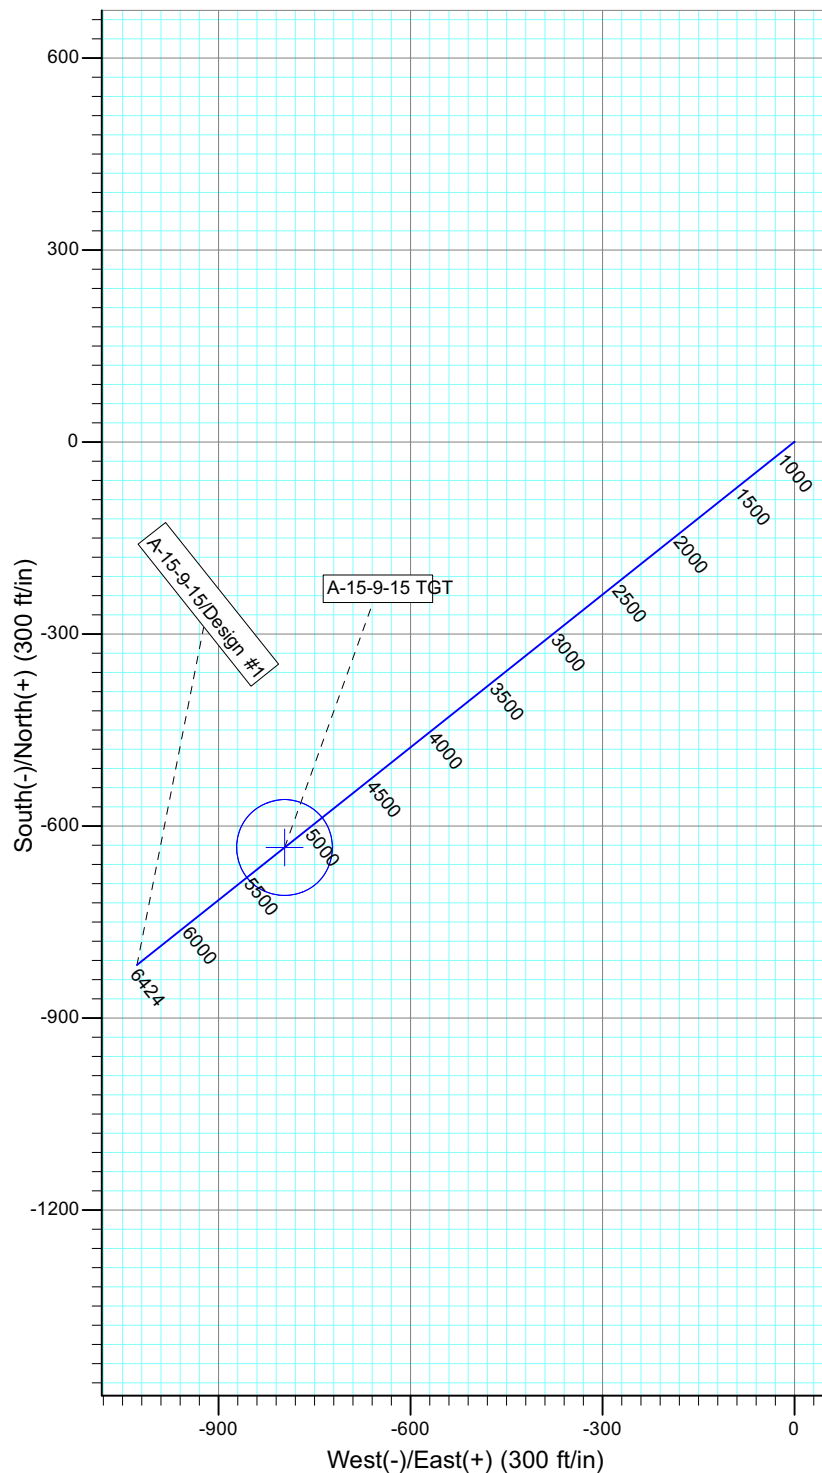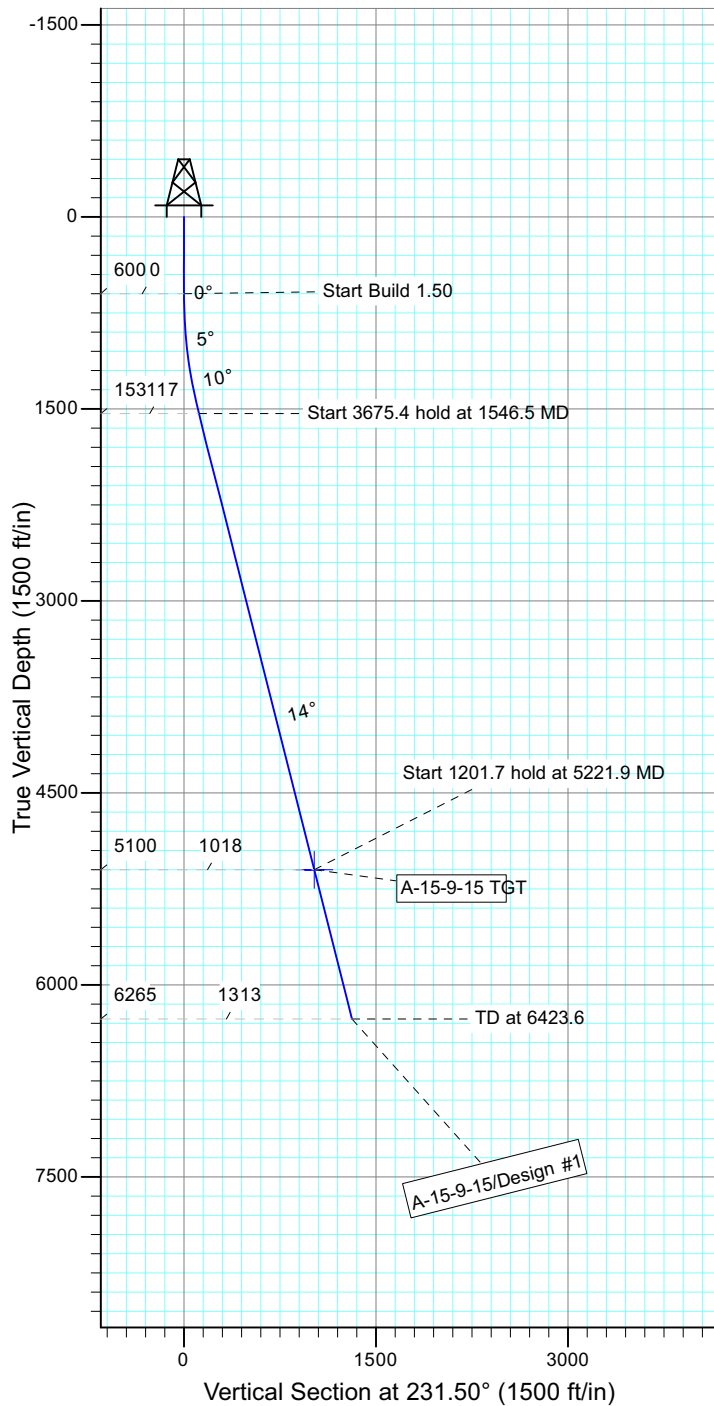

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
A-15-9-15 TGT	5100.0	-633.8	-796.8	Circle (Radius: 75.0)

## SECTION DETAILS


Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1546.5	14.20	231.50	1536.8	-72.6	-91.3	1.50	231.50	116.7	
4	5221.9	14.20	231.50	5100.0	-633.8	-796.8	0.00	0.00	1018.1	A-15-9-15 TGT
5	6423.6	14.20	231.50	6265.0	-817.3	-1027.5	0.00	0.00	1312.9	



API Well Number: 43013510890000





Project: USGS Myton SW (UT)  
 Site: SECTION 13 T9, R15  
 Well: O-18-9-16  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.33°

Magnetic Field  
 Strength: 52228.0snT  
 Dip Angle: 65.76°  
 Date: 2011/08/11  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

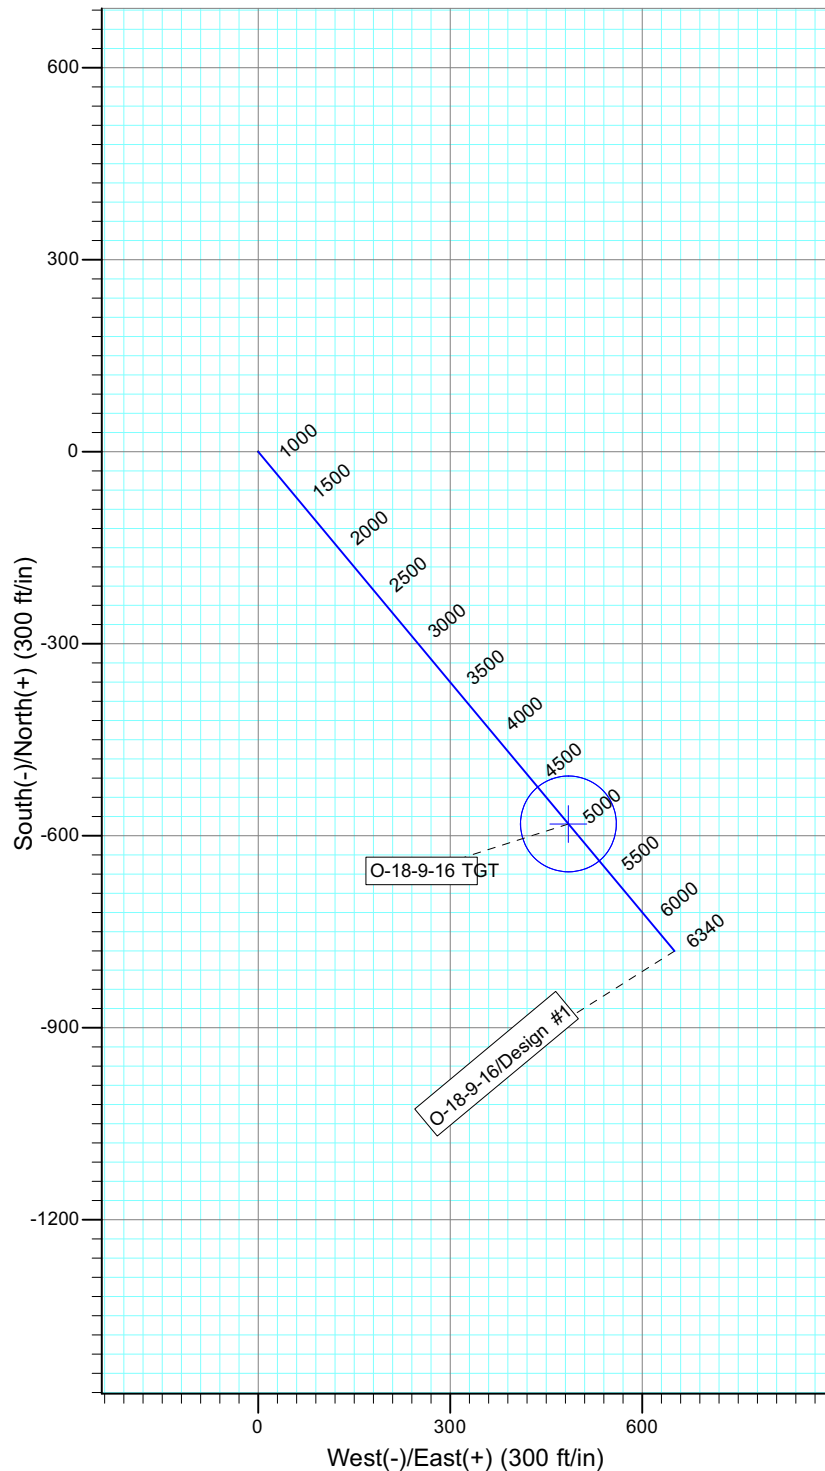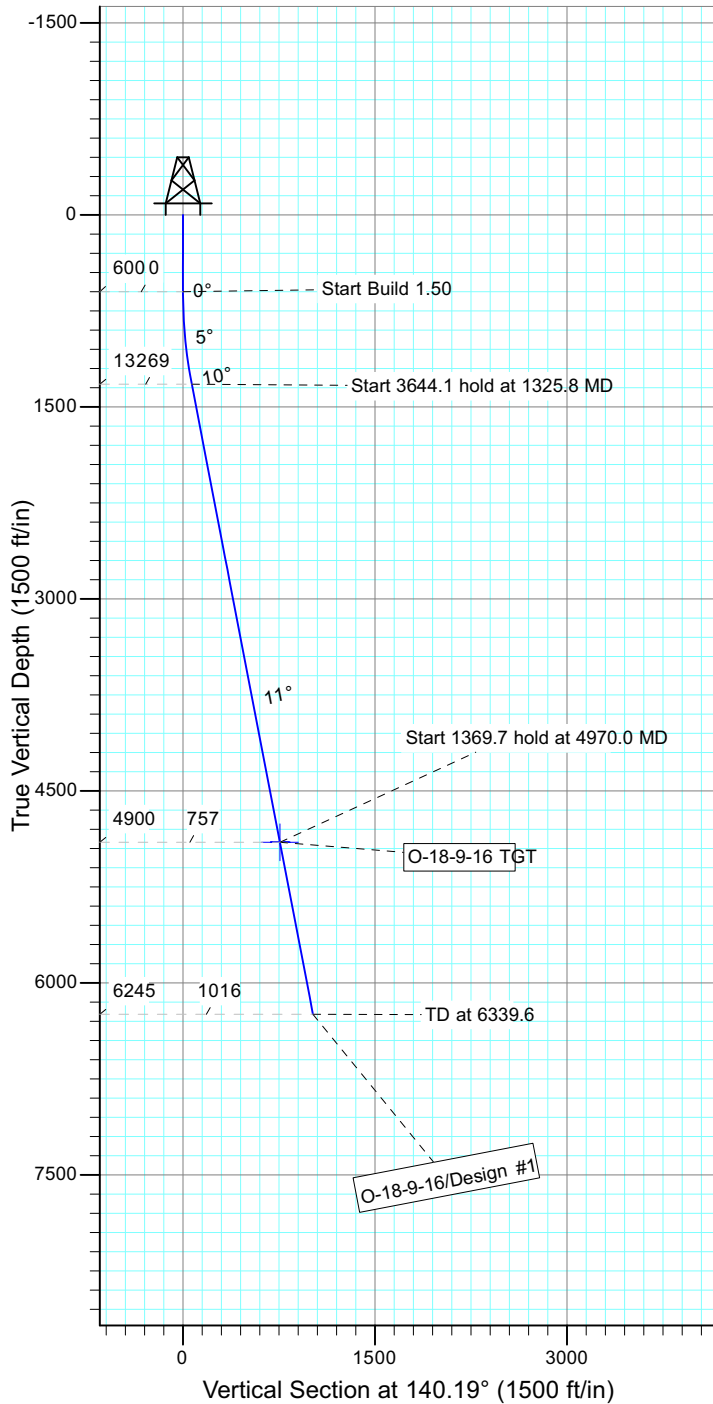

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
O-18-9-16 TGT	4900.0	-581.6	484.7	Circle (Radius: 75.0)

## SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1325.8	10.89	140.19	1321.5	-52.8	44.0	1.50	140.19	68.8	
4	4970.0	10.89	140.19	4900.0	-581.6	484.7	0.00	0.00	757.1	O-18-9-16 TGT
5	6339.6	10.89	140.19	6245.0	-780.3	650.3	0.00	0.00	1015.8	






API Well Number: 43013510900000





Project: USGS Myton SW (UT)  
 Site: SECTION 11 T 9S R15E  
 Well: M-11-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.35°

Magnetic Field  
 Strength: 52229.1snT  
 Dip Angle: 65.76°  
 Date: 2011/08/11  
 Model: IGRF2010

KOP @ 600'  
 DOGLENG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

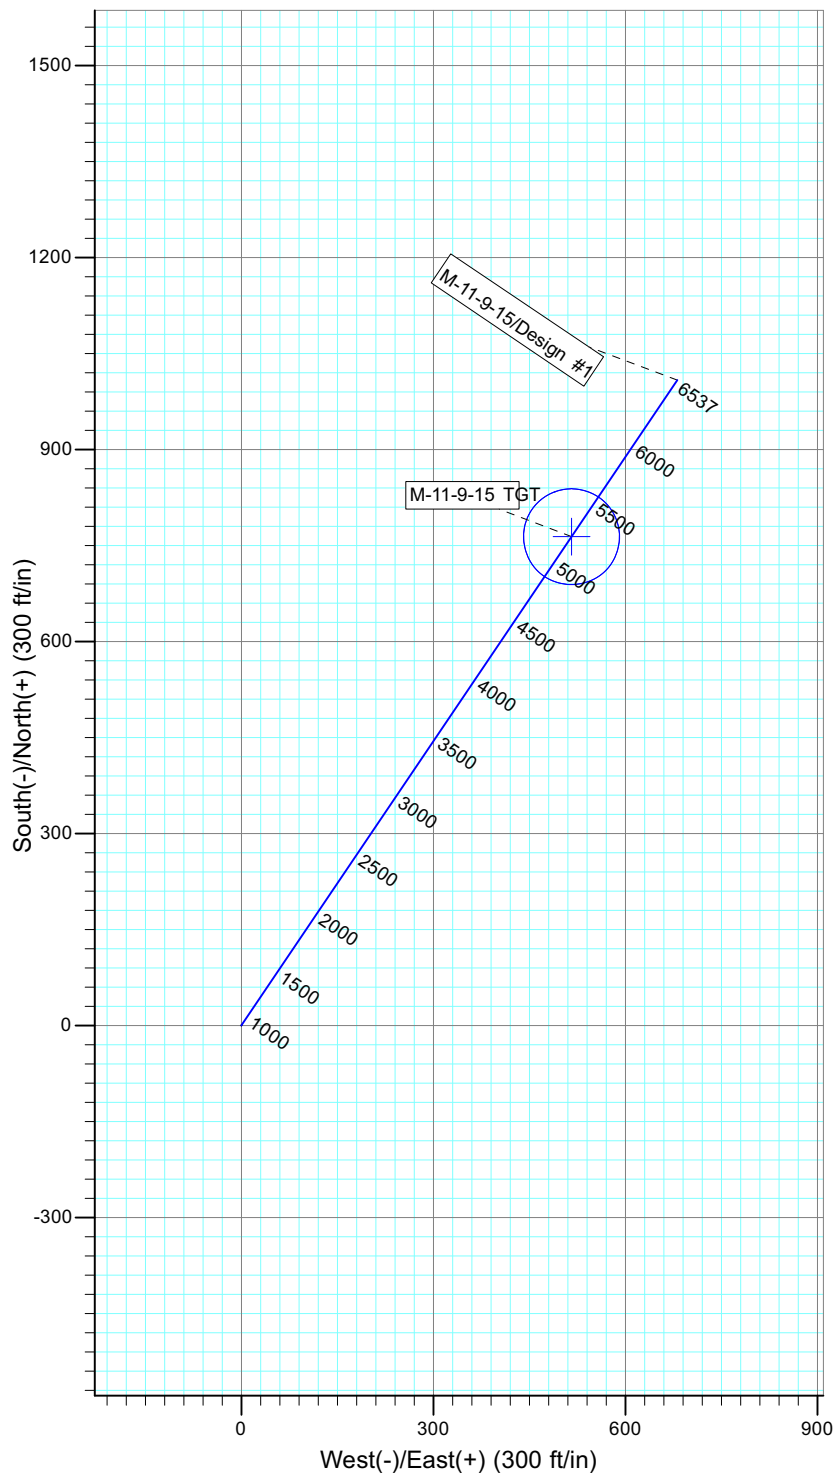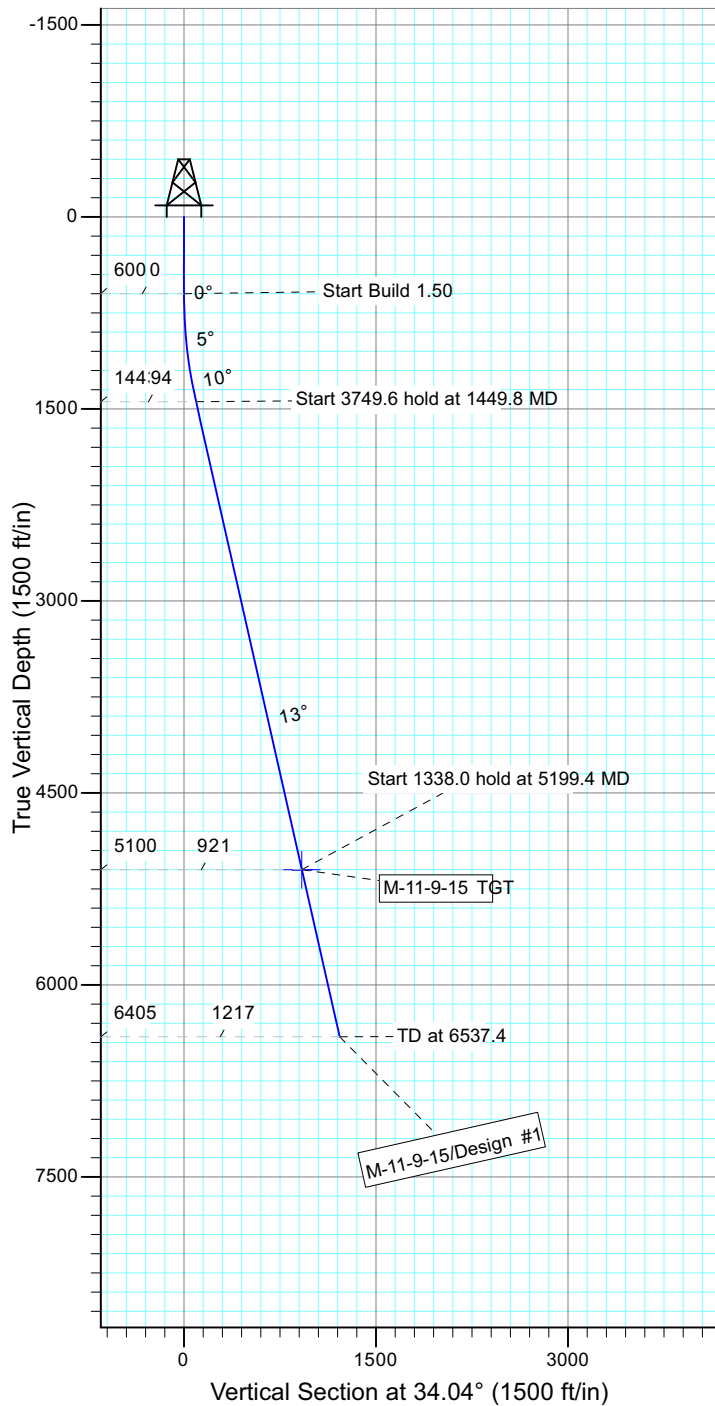

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
M-11-9-15 TGT	5100.0	763.5	515.8	Circle (Radius: 75.0)

## SECTION DETAILS


Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1449.8	12.75	34.04	1442.8	78.0	52.7	1.50	34.04	94.1	
4	5199.4	12.75	34.04	5100.0	763.5	515.8	0.00	0.00	921.4	M-11-9-15 TGT
5	6537.4	12.75	34.04	6405.0	1008.2	681.1	0.00	0.00	1216.6	



API Well Number: 43013510910000





Project: USGS Myton SW (UT)  
 Site: SECTION 11 T 9S R15E  
 Well: Q-11-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.35°

Magnetic Field  
 Strength: 52229.2snT  
 Dip Angle: 65.76°  
 Date: 2011/08/11  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

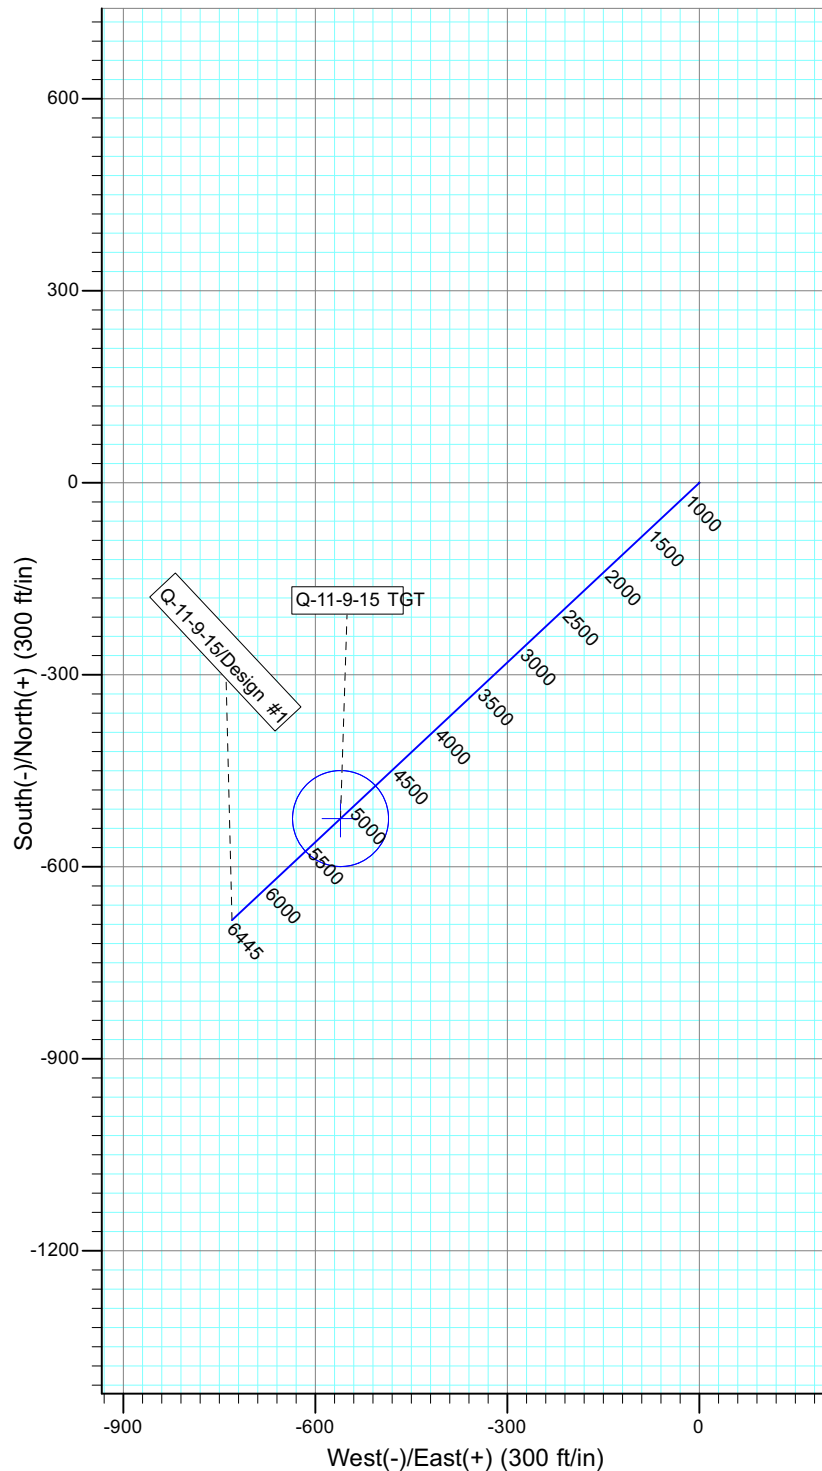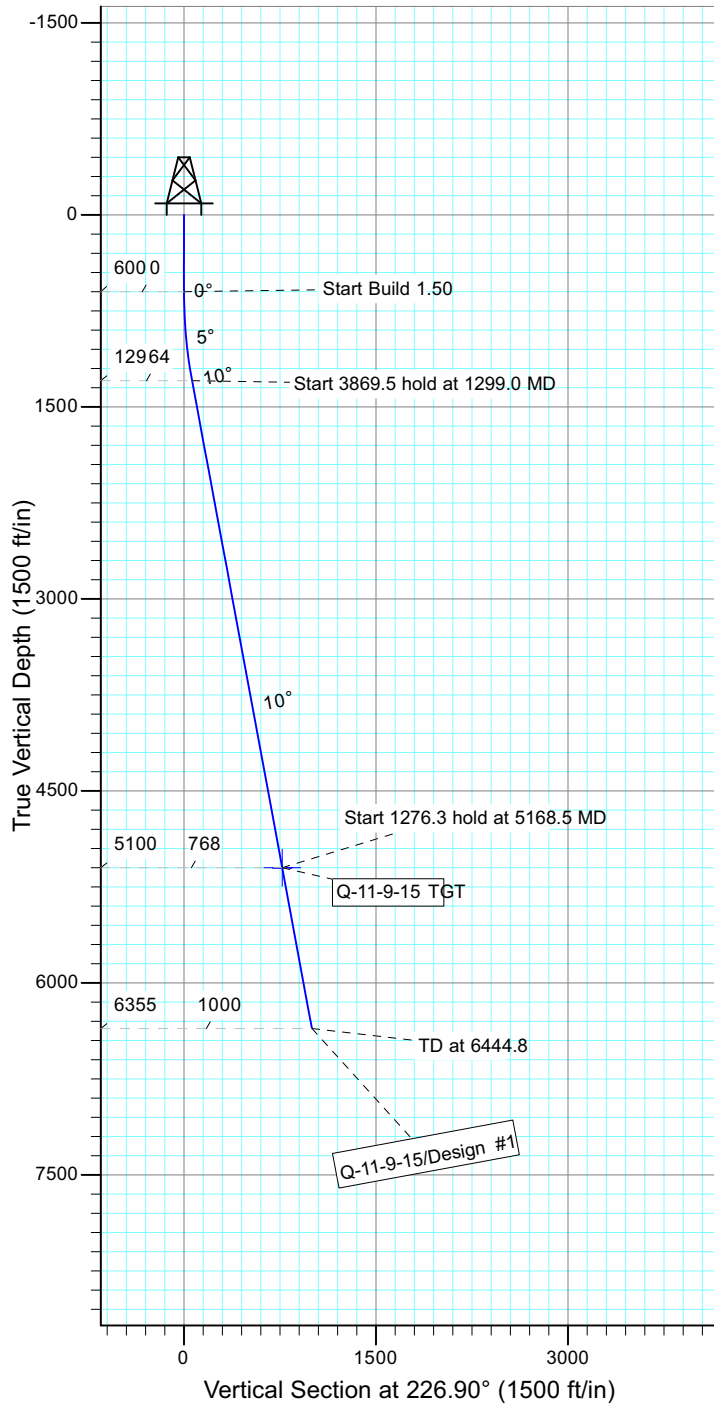

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
Q-11-9-15 TGT	5100.0	-524.7	-560.7	Circle (Radius: 75.0)

## SECTION DETAILS


Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1299.0	10.48	226.90	1295.1	-43.6	-46.6	1.50	226.90	63.8	
4	5168.5	10.48	226.90	5100.0	-524.7	-560.7	0.00	0.00	767.9	Q-11-9-15 TGT
5	6444.8	10.48	226.90	6355.0	-683.4	-730.3	0.00	0.00	1000.2	



API Well Number: 43013510990000





Project: USGS Myton SW (UT)  
 Site: SECTION 10 T9S, R15E  
 Well: L-10-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.35°

Magnetic Field  
 Strength: 52227.1snT  
 Dip Angle: 65.76°  
 Date: 2011/08/11  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

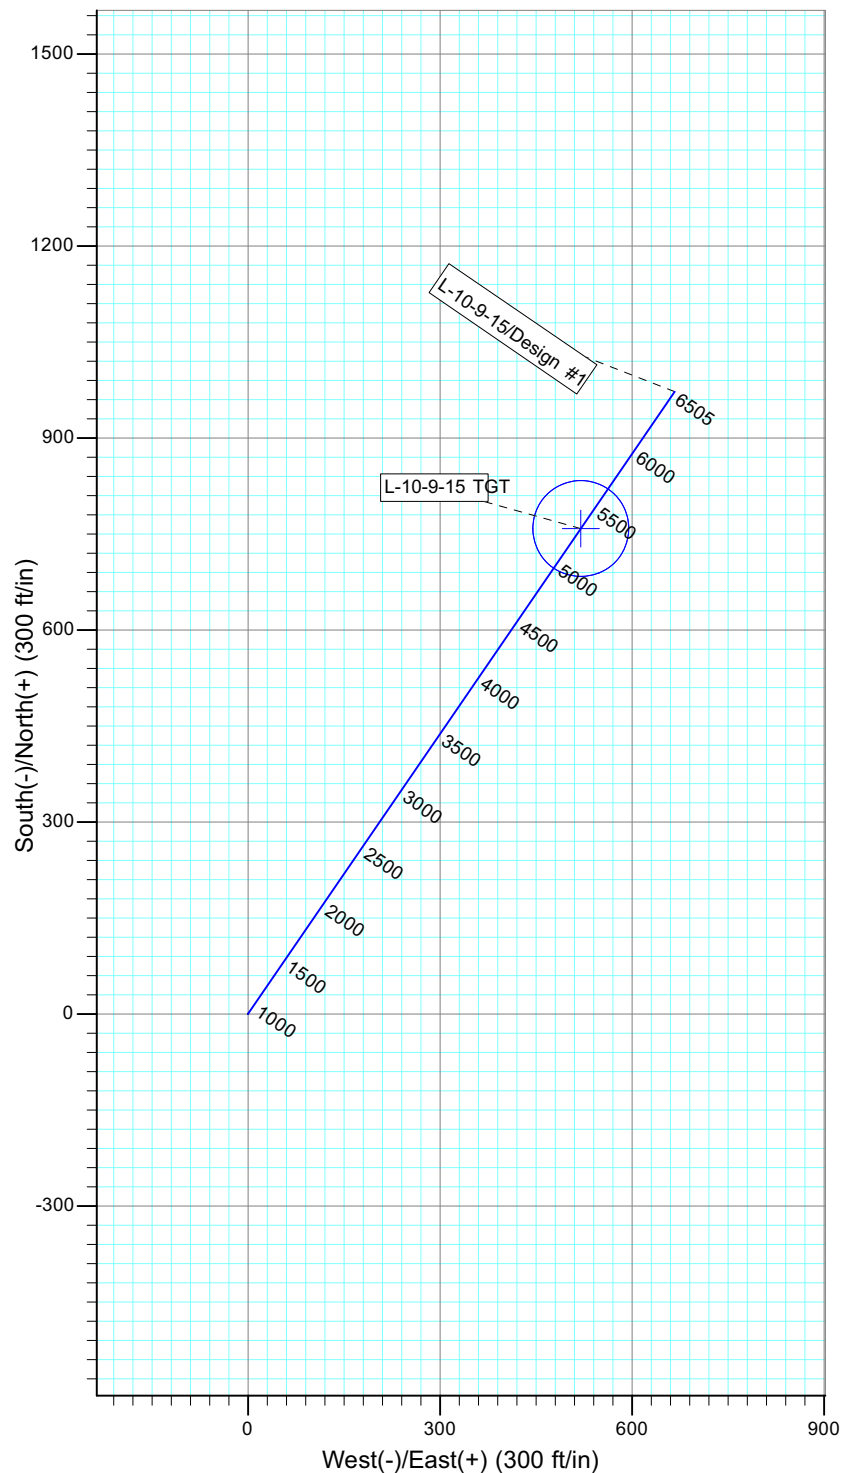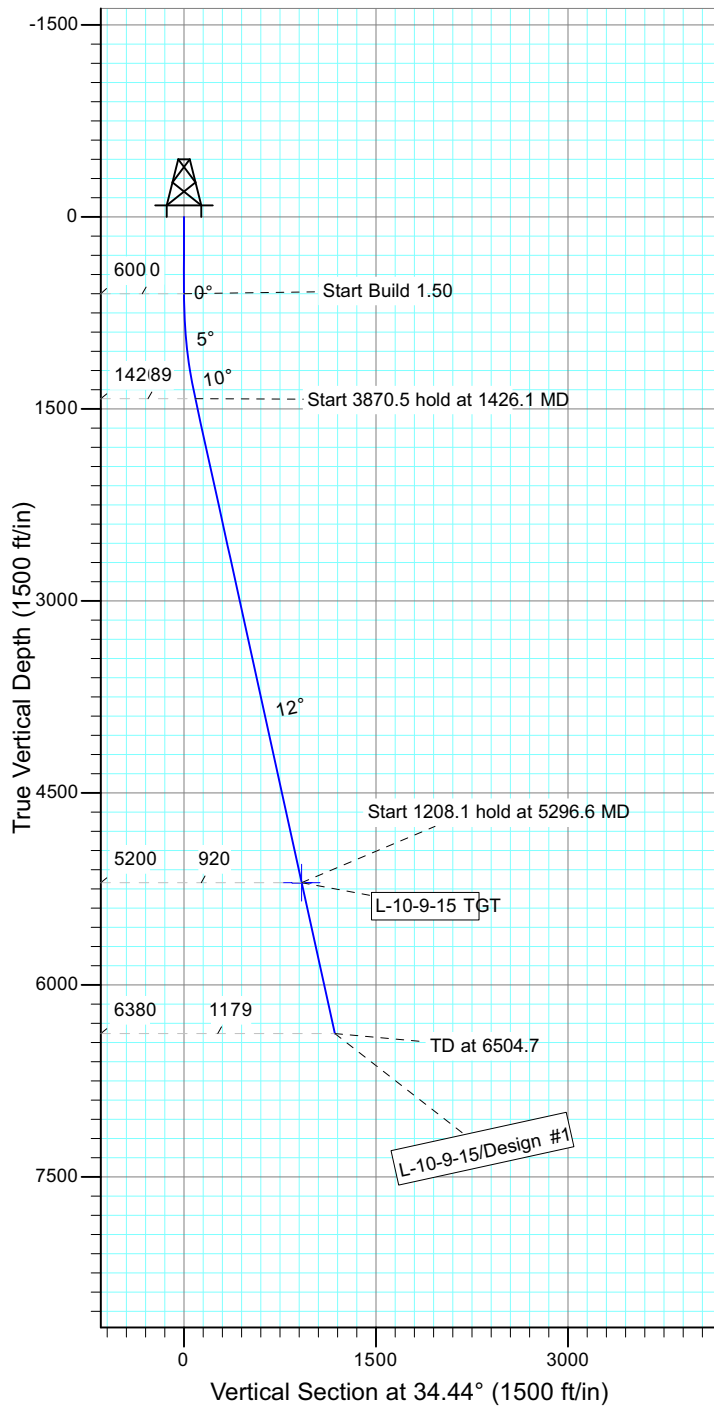

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
L-10-9-15 TGT	5200.0	758.4	520.0	Circle (Radius: 75.0)

## SECTION DETAILS


Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1426.1	12.39	34.44	1419.7	73.4	50.3	1.50	34.44	89.0	
4	5296.6	12.39	34.44	5200.0	758.4	520.0	0.00	0.00	919.6	L-10-9-15 TGT
5	6504.7	12.39	34.44	6380.0	972.2	666.6	0.00	0.00	1178.8	



API Well Number: 43013510900000





Project: USGS Myton SW (UT)  
 Site: SECTION 11 T 9S R15E  
 Well: K-10-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.35°

Magnetic Field  
 Strength: 52228.4snT  
 Dip Angle: 65.76°  
 Date: 2011/08/11  
 Model: IGRF2010

KOP @ 600'  
 DOGLENG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

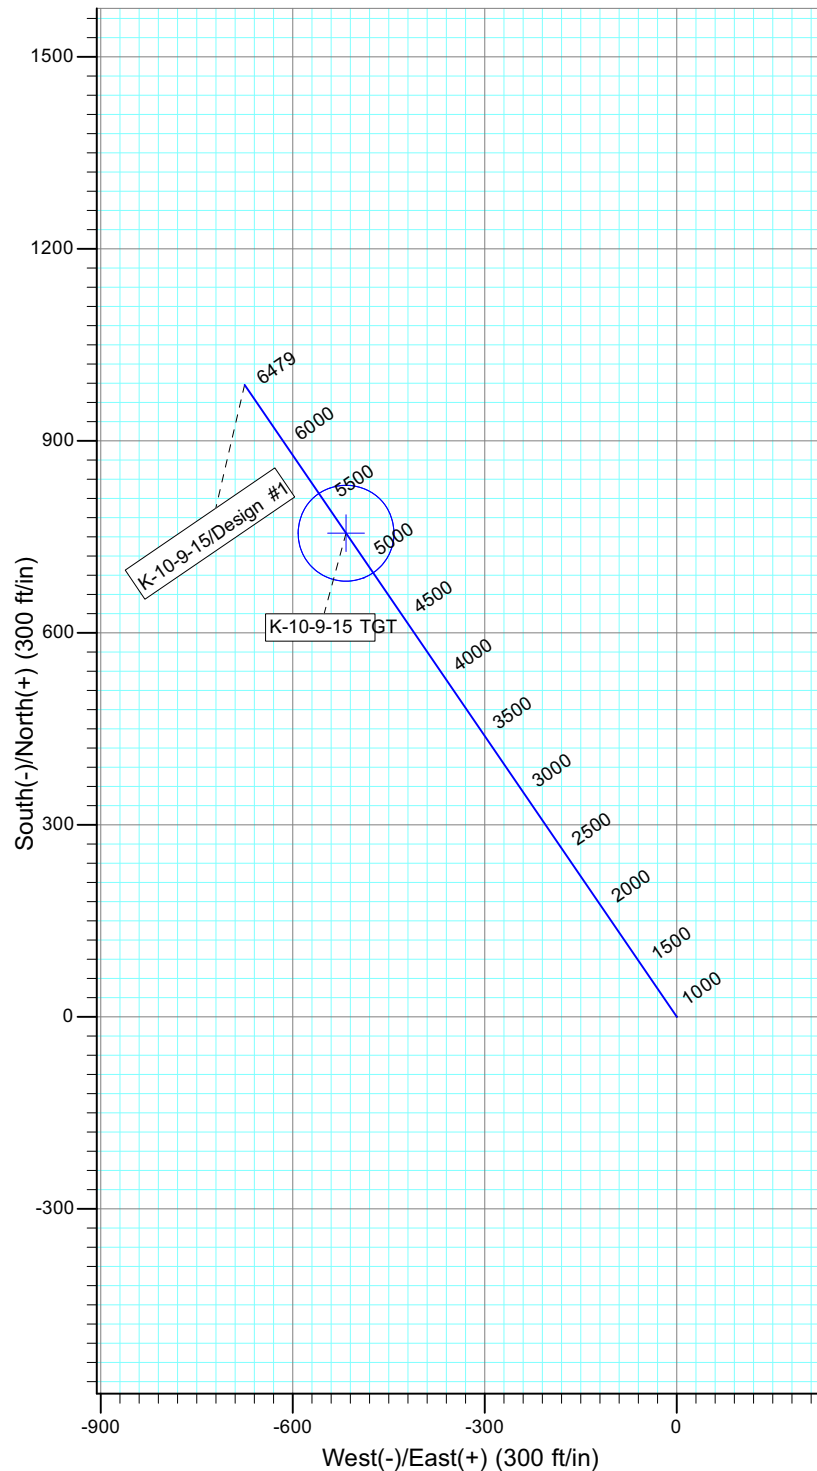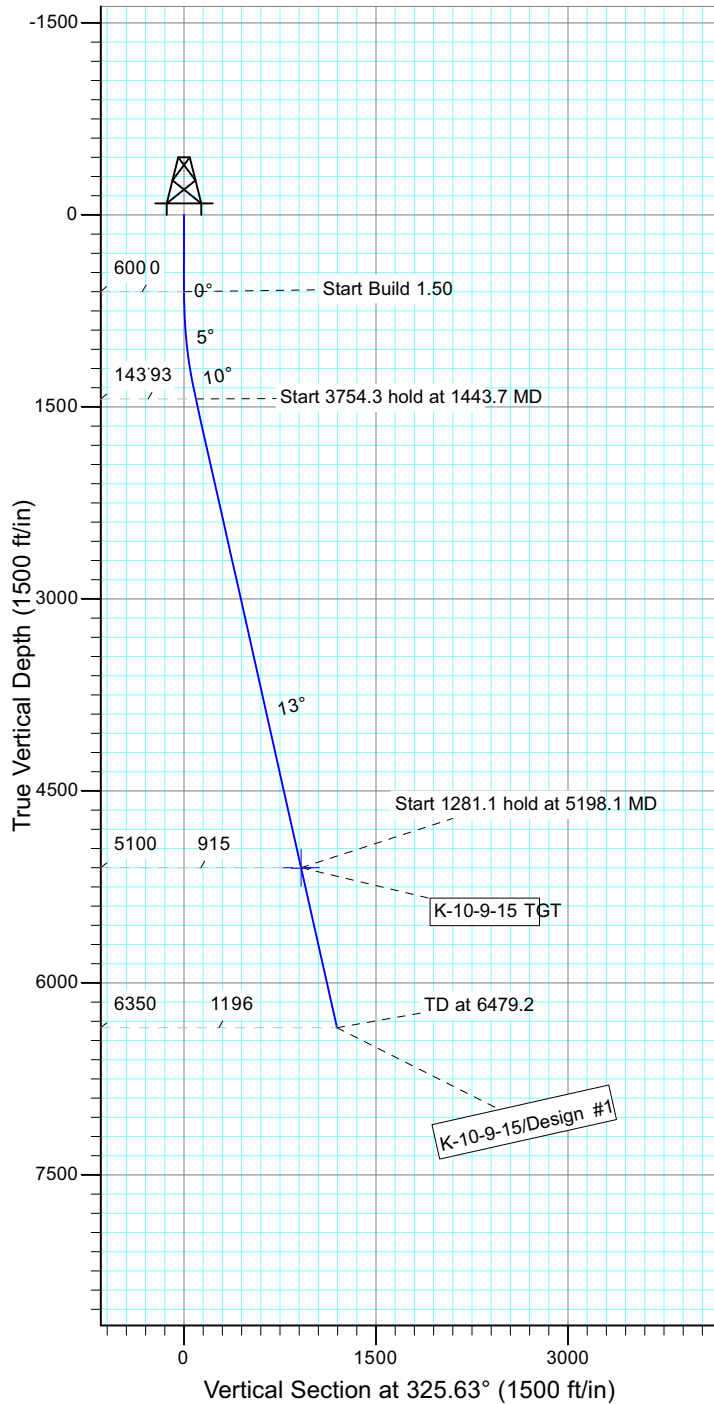

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
K-10-9-15 TGT	5100.0	755.6	-516.8	Circle (Radius: 75.0)

## SECTION DETAILS


Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1443.7	12.66	325.63	1436.9	76.6	-52.4	1.50	325.63	92.8	
4	5198.1	12.66	325.63	5100.0	755.6	-516.8	0.00	0.00	915.4	K-10-9-15 TGT
5	6479.2	12.66	325.63	6350.0	987.3	-675.2	0.00	0.00	1196.1	









Project: USGS Myton SW (UT)  
 Site: SECTION 11 T 9S R15E  
 Well: T-10-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.35°

Magnetic Field  
 Strength: 52228.4snT  
 Dip Angle: 65.76°  
 Date: 2011/08/11  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

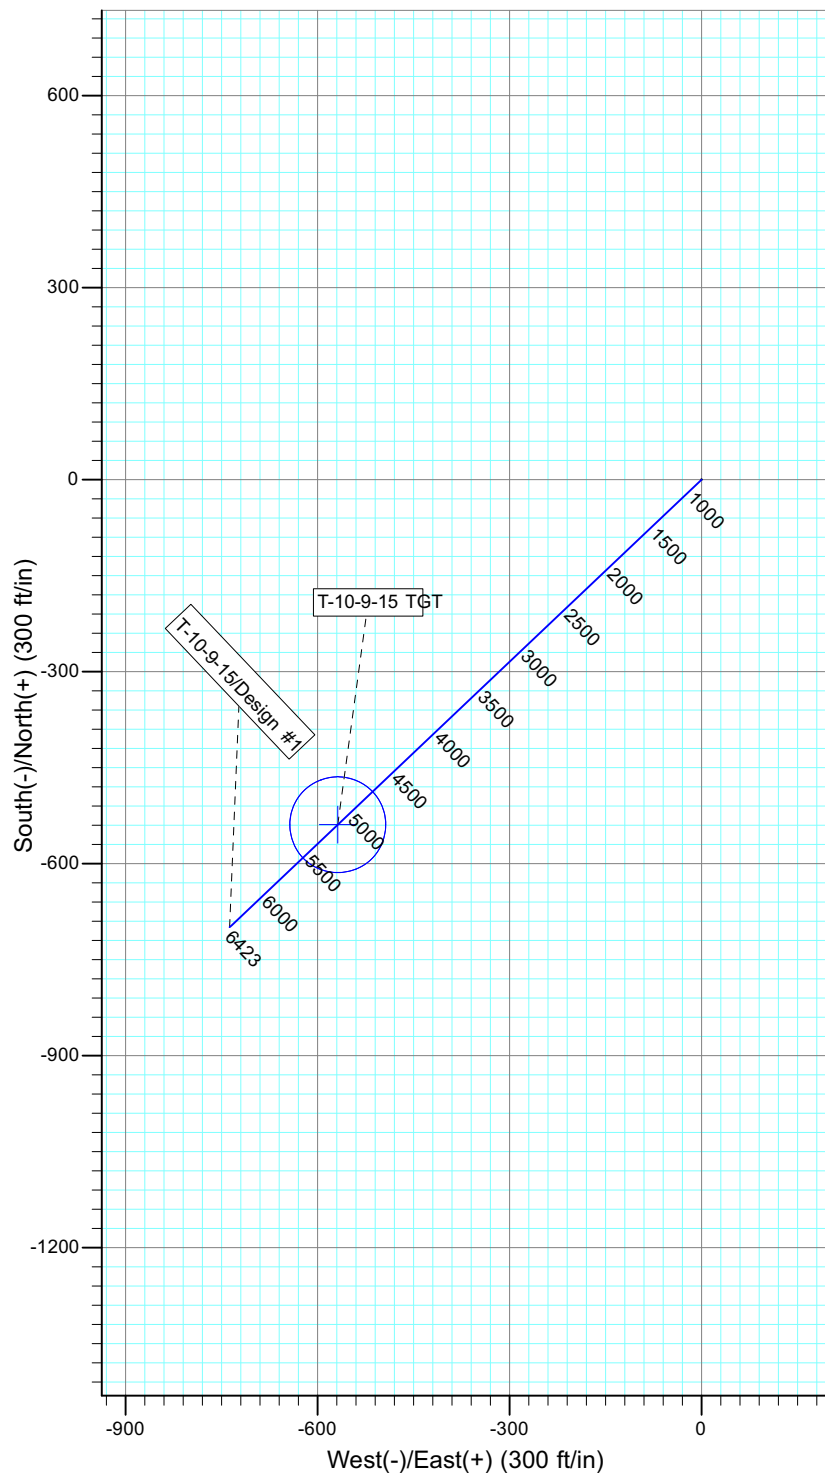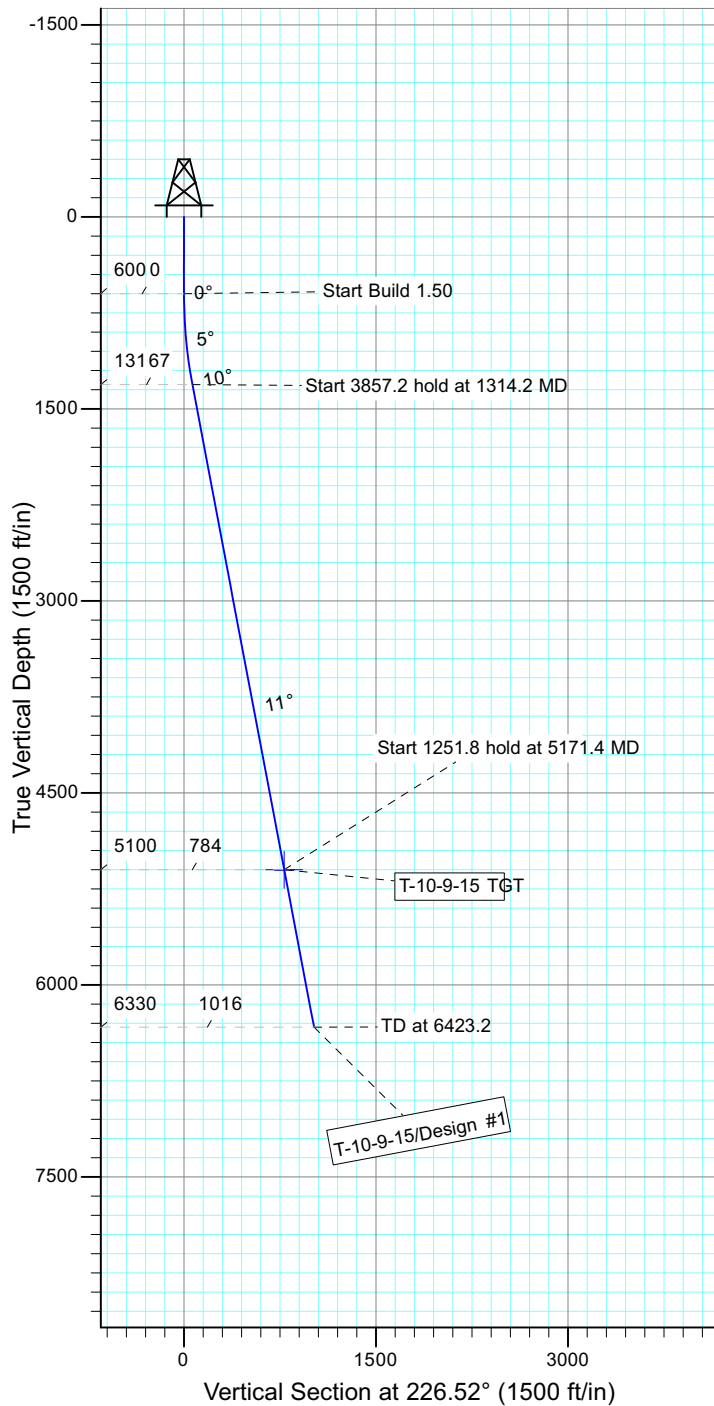

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
T-10-9-15 TGT	5100.0	-539.2	-568.6	Circle (Radius: 75.0)

## SECTION DETAILS


Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1314.2	10.71	226.52	1310.0	-45.8	-48.3	1.50	226.52	66.6	
4	5171.4	10.71	226.52	5100.0	-539.2	-568.6	0.00	0.00	783.6	T-10-9-15 TGT
5	6423.2	10.71	226.52	6330.0	-699.3	-737.4	0.00	0.00	1016.3	



API Well Number: 43013510920000





Project: USGS Myton SW (UT)  
 Site: SECTION 11 T 9S R15E  
 Well: H-11-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.35°

Magnetic Field  
 Strength: 52231.9snT  
 Dip Angle: 65.77°  
 Date: 2011/08/11  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

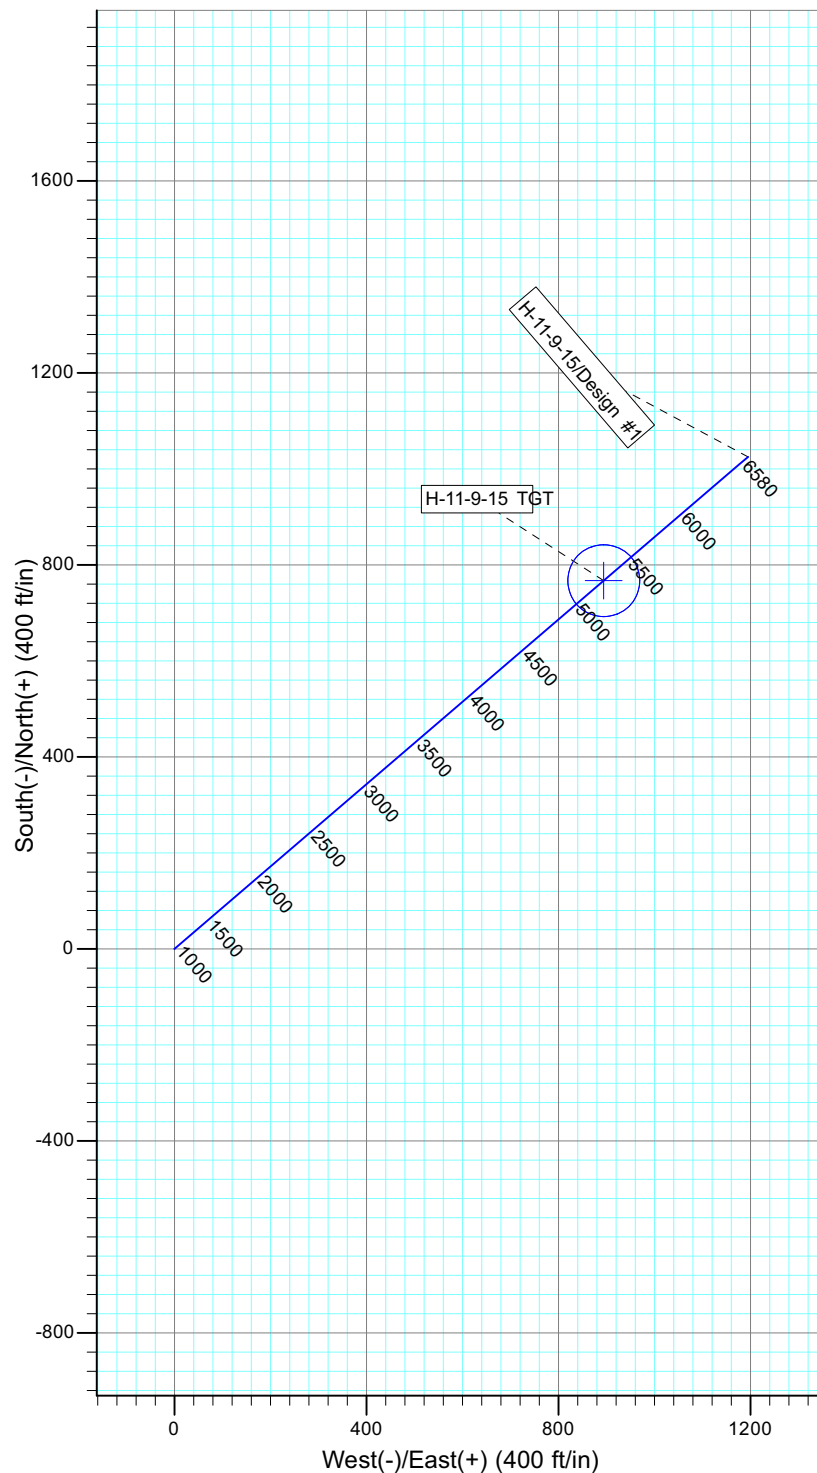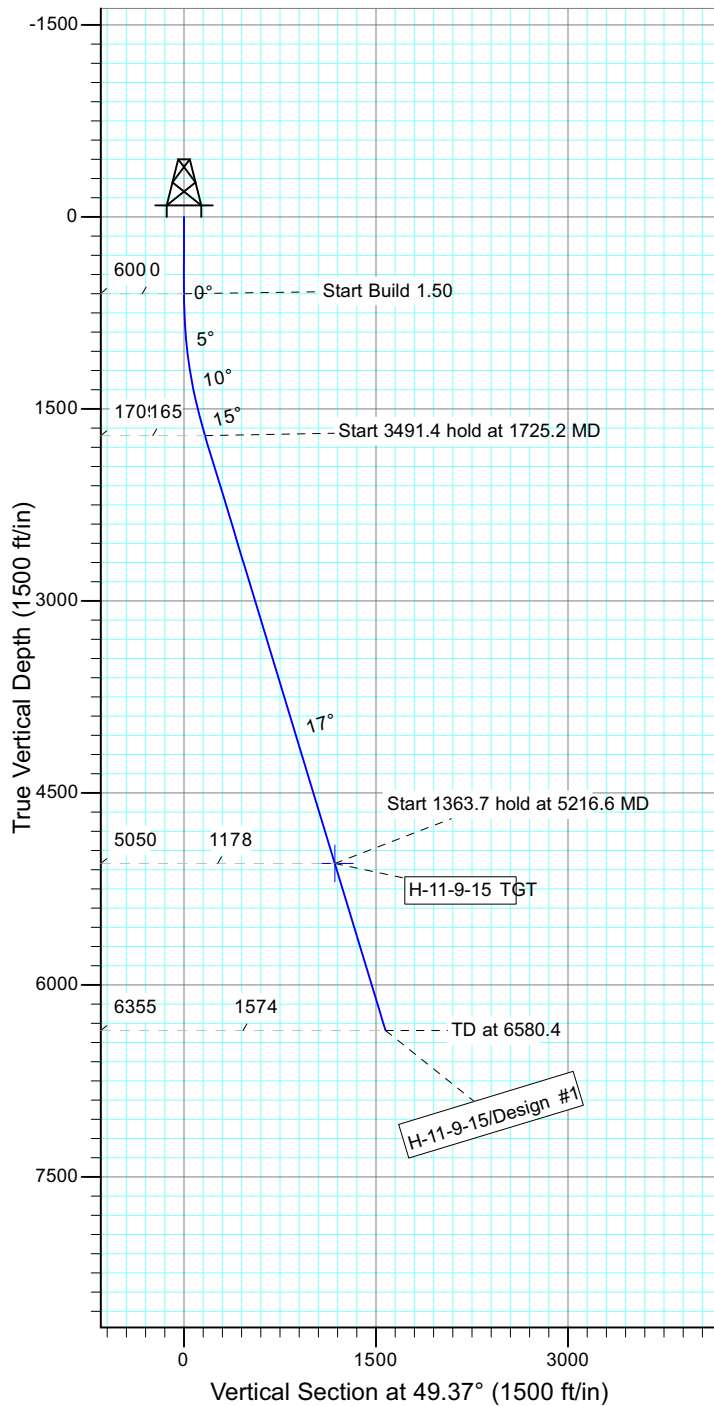

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
H-11-9-15 TGT	5050.0	767.2	894.3	Circle (Radius: 75.0)

## SECTION DETAILS


Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1725.2	16.88	49.37	1709.0	107.1	124.9	1.50	49.37	164.5	
4	5216.6	16.88	49.37	5050.0	767.2	894.3	0.00	0.00	1178.2	H-11-9-15 TGT
5	6580.4	16.88	49.37	6355.0	1025.0	1194.8	0.00	0.00	1574.2	



API Well Number: 43013510930000





Project: USGS Myton SW (UT)  
 Site: SECTION 11 T 9S R15E  
 Well: N-11-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.35°

Magnetic Field  
 Strength: 52231.9snT  
 Dip Angle: 65.77°  
 Date: 2011/08/11  
 Model: IGRF2010

KOP @ 600'  
 DOGLENG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

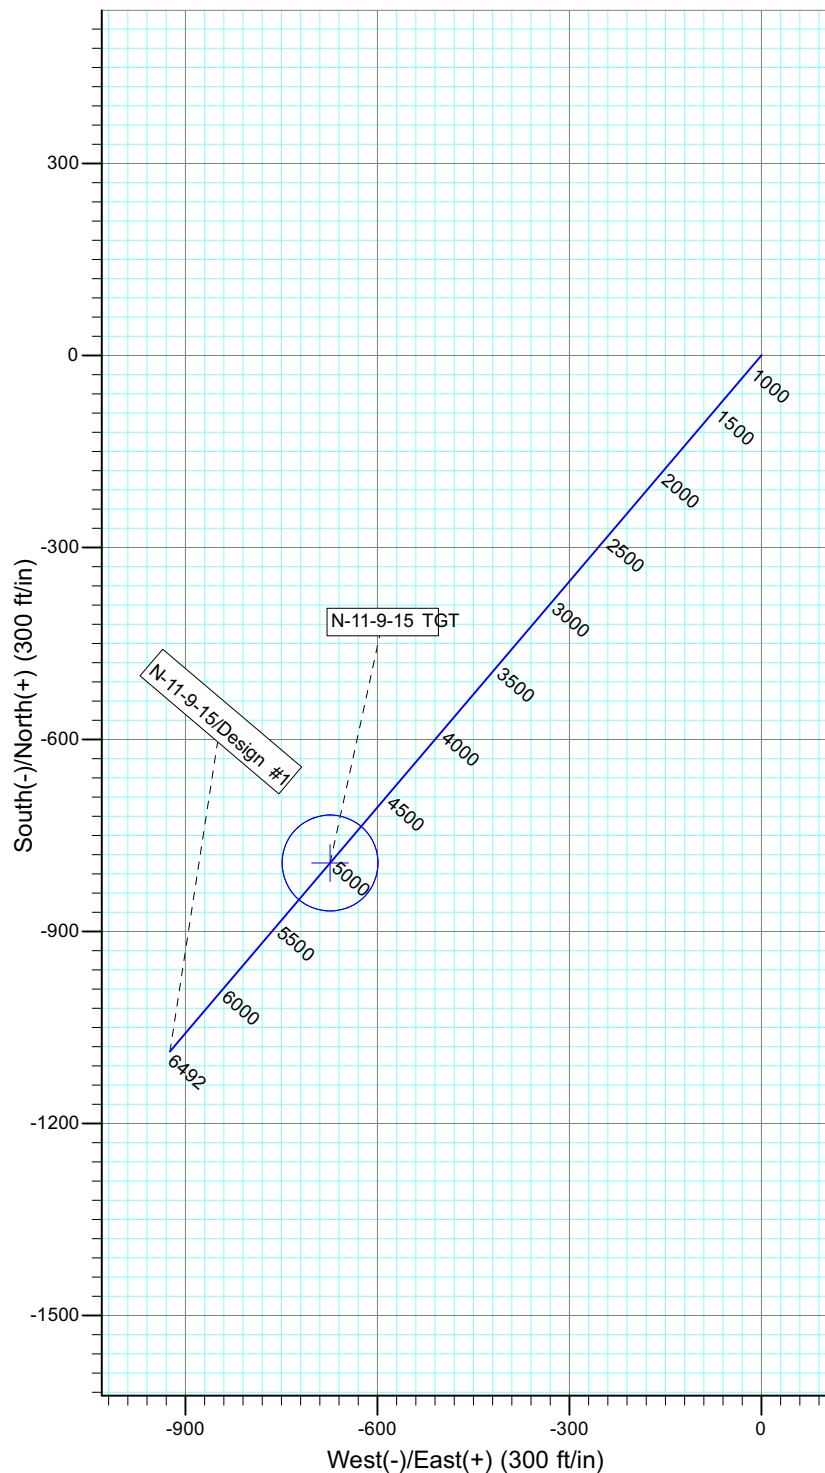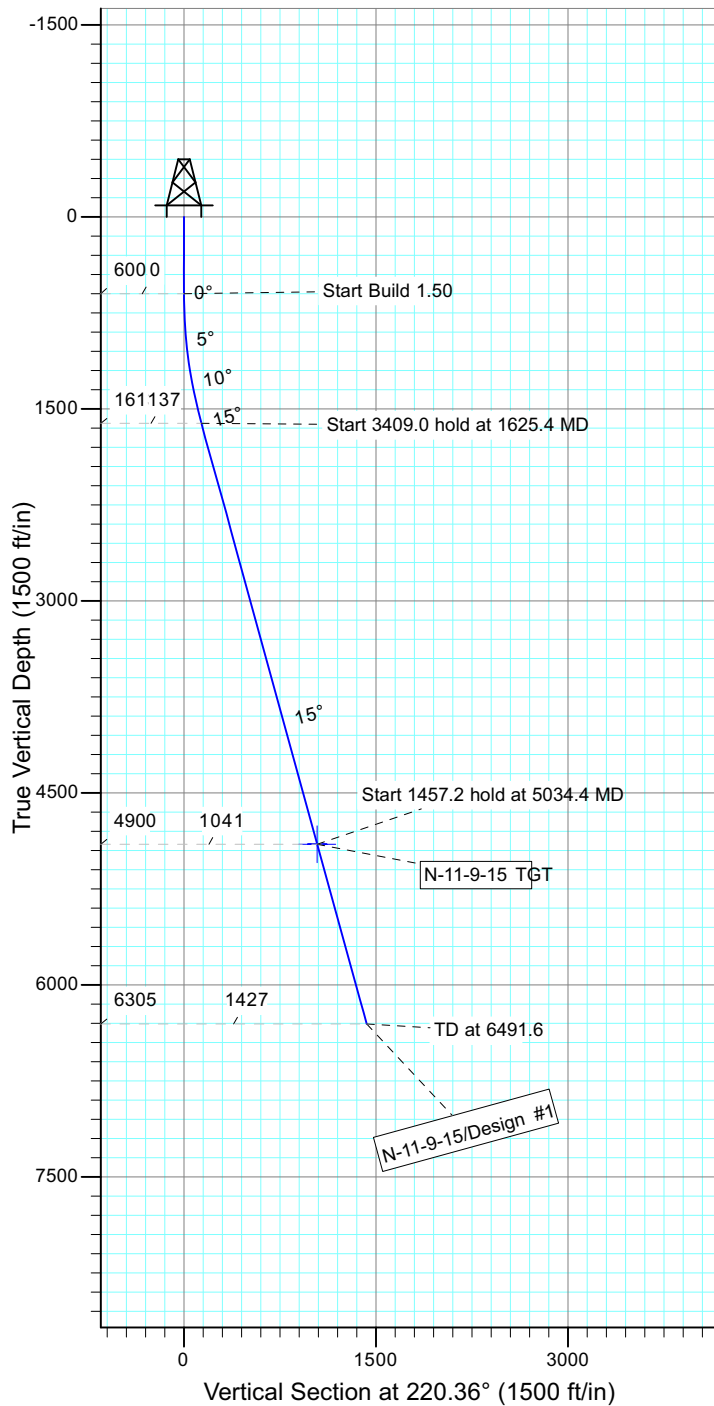

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
N-11-9-15 TGT	4900.0	-793.2	-674.1	Circle (Radius: 75.0)

## SECTION DETAILS


Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1625.4	15.38	220.36	1613.1	-104.2	-88.6	1.50	220.36	136.8	
4	5034.4	15.38	220.36	4900.0	-793.2	-674.1	0.00	0.00	1041.0	N-11-9-15 TGT
5	6491.6	15.38	220.36	6305.0	-1087.7	-924.4	0.00	0.00	1427.5	



API Well Number: 43013510940000





Project: USGS Myton SW (UT)  
 Site: SECTION 11 T 9S R15E  
 Well: G-11-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.35°

Magnetic Field  
 Strength: 52233.7snT  
 Dip Angle: 65.77°  
 Date: 2011/08/11  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

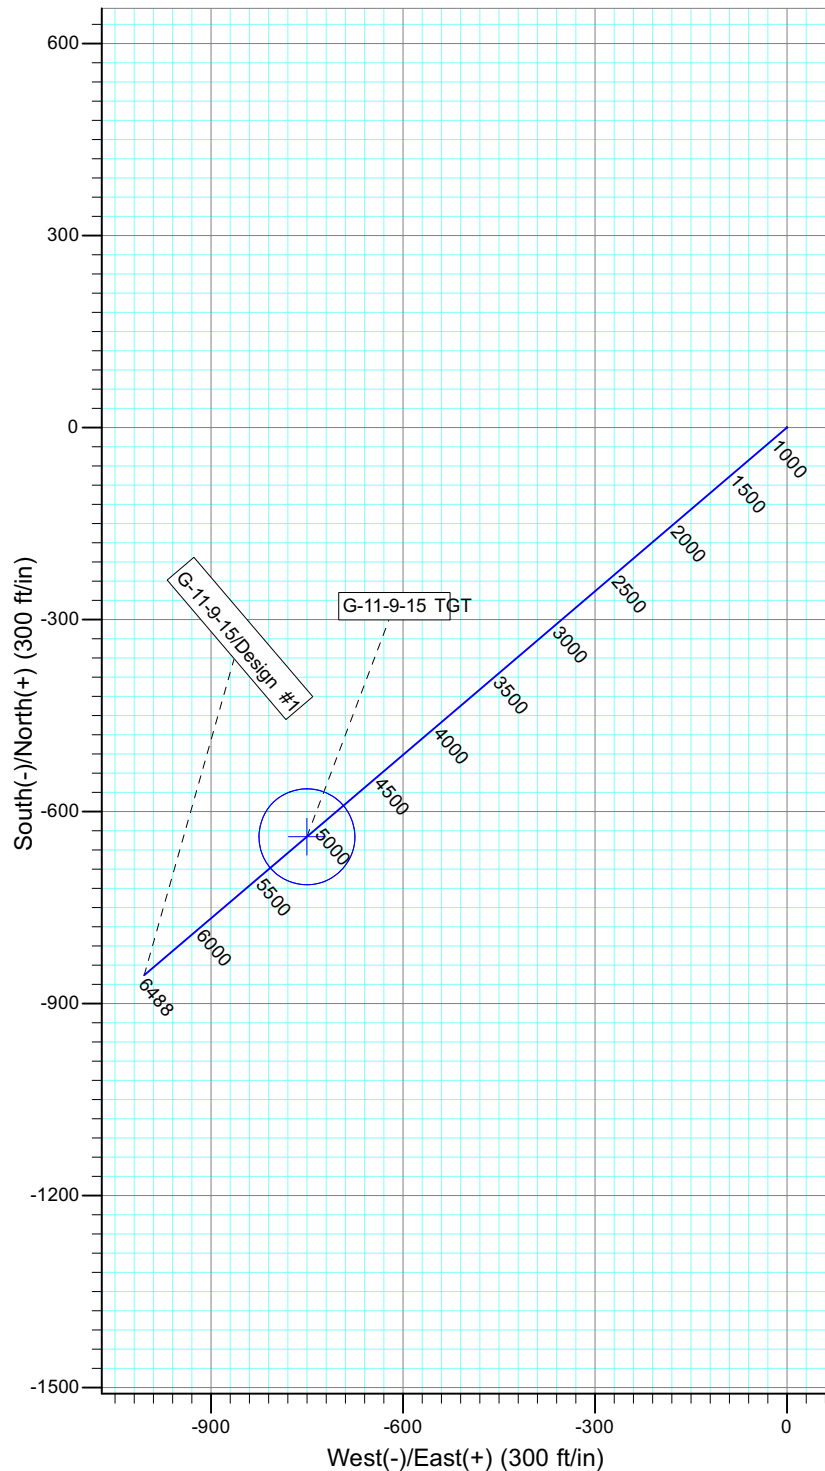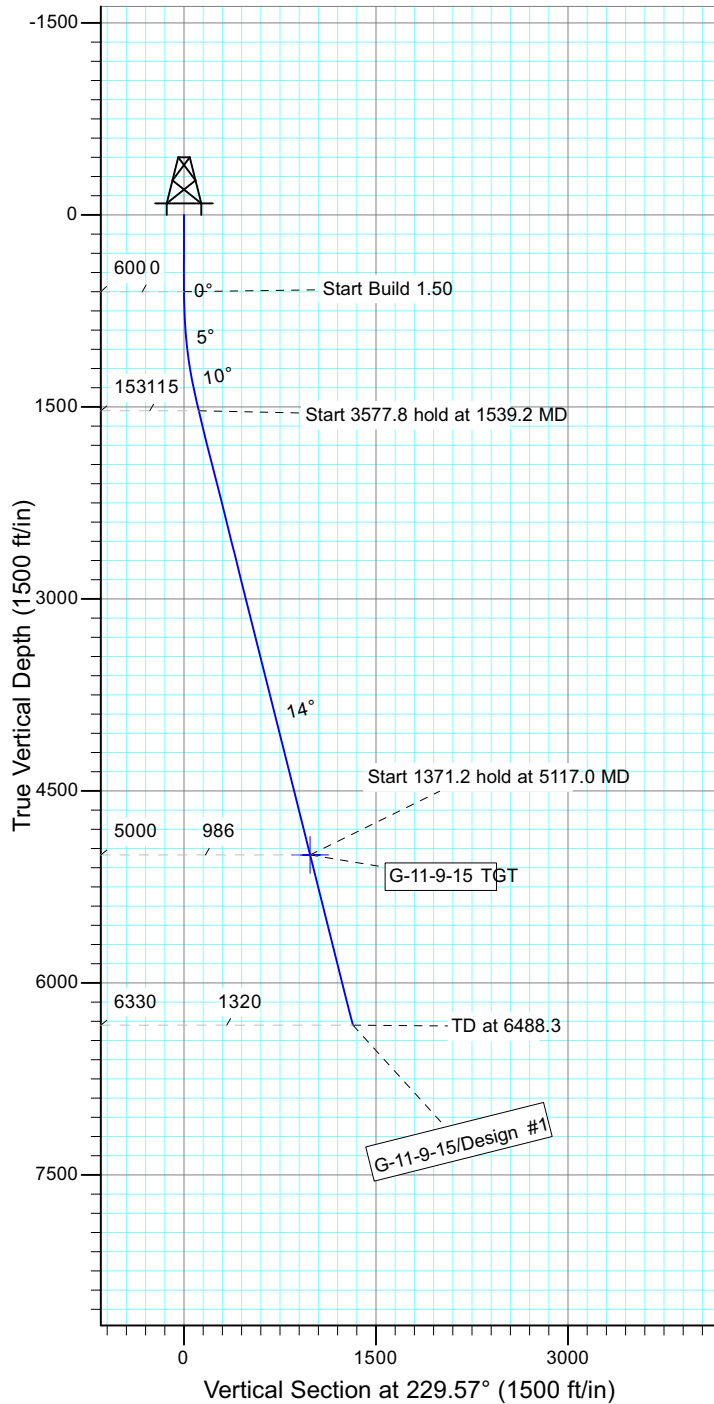

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
G-11-9-15 TGT	5000.0	-639.3	-750.4	Circle (Radius: 75.0)

## SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1539.2	14.09	229.57	1529.8	-74.5	-87.4	1.50	229.57	114.9	
4	5117.0	14.09	229.57	5000.0	-639.3	-750.4	0.00	0.00	985.8	G-11-9-15 TGT
5	6488.3	14.09	229.57	6330.0	-855.7	-1004.4	0.00	0.00	1319.5	






API Well Number: 43013510950000





Project: USGS Myton SW (UT)  
 Site: SECTION 11 T 9S R15E  
 Well: X-2-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.35°

Magnetic Field  
 Strength: 52233.7snT  
 Dip Angle: 65.77°  
 Date: 2011/08/11  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

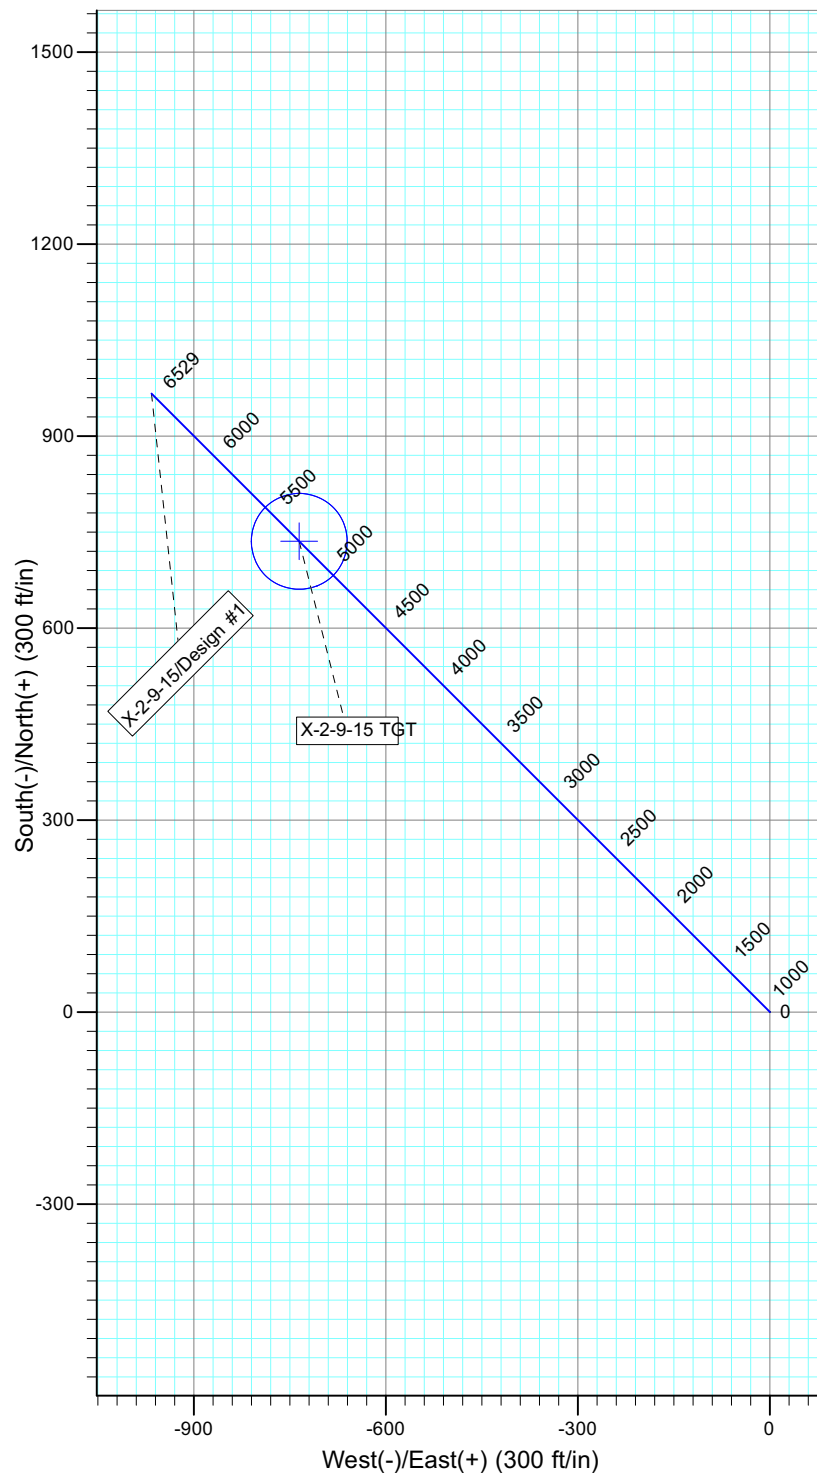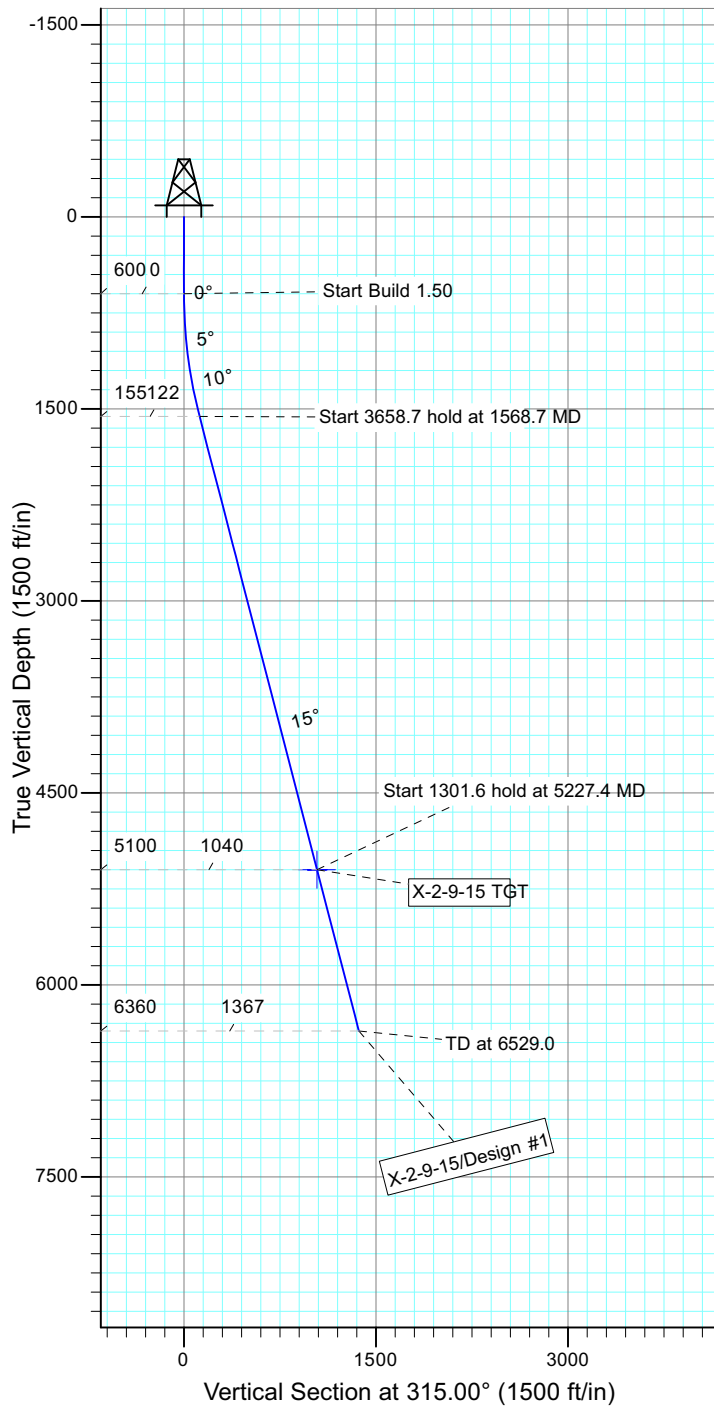

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
X-2-9-15 TGT	5100.0	735.5	-735.5	Circle (Radius: 75.0)

## SECTION DETAILS


Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1568.7	14.53	315.00	1558.3	86.4	-86.4	1.50	315.00	122.2	
4	5227.4	14.53	315.00	5100.0	735.5	-735.5	0.00	0.00	1040.1	X-2-9-15 TGT
5	6529.0	14.53	315.00	6360.0	966.4	-966.4	0.00	0.00	1366.7	



API Well Number: 43013510960000





Project: USGS Myton SW (UT)  
 Site: SECTION 12 T9S, R15E  
 Well: R-12-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.33°

Magnetic Field  
 Strength: 52226.4snT  
 Dip Angle: 65.76°  
 Date: 2011/08/29  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

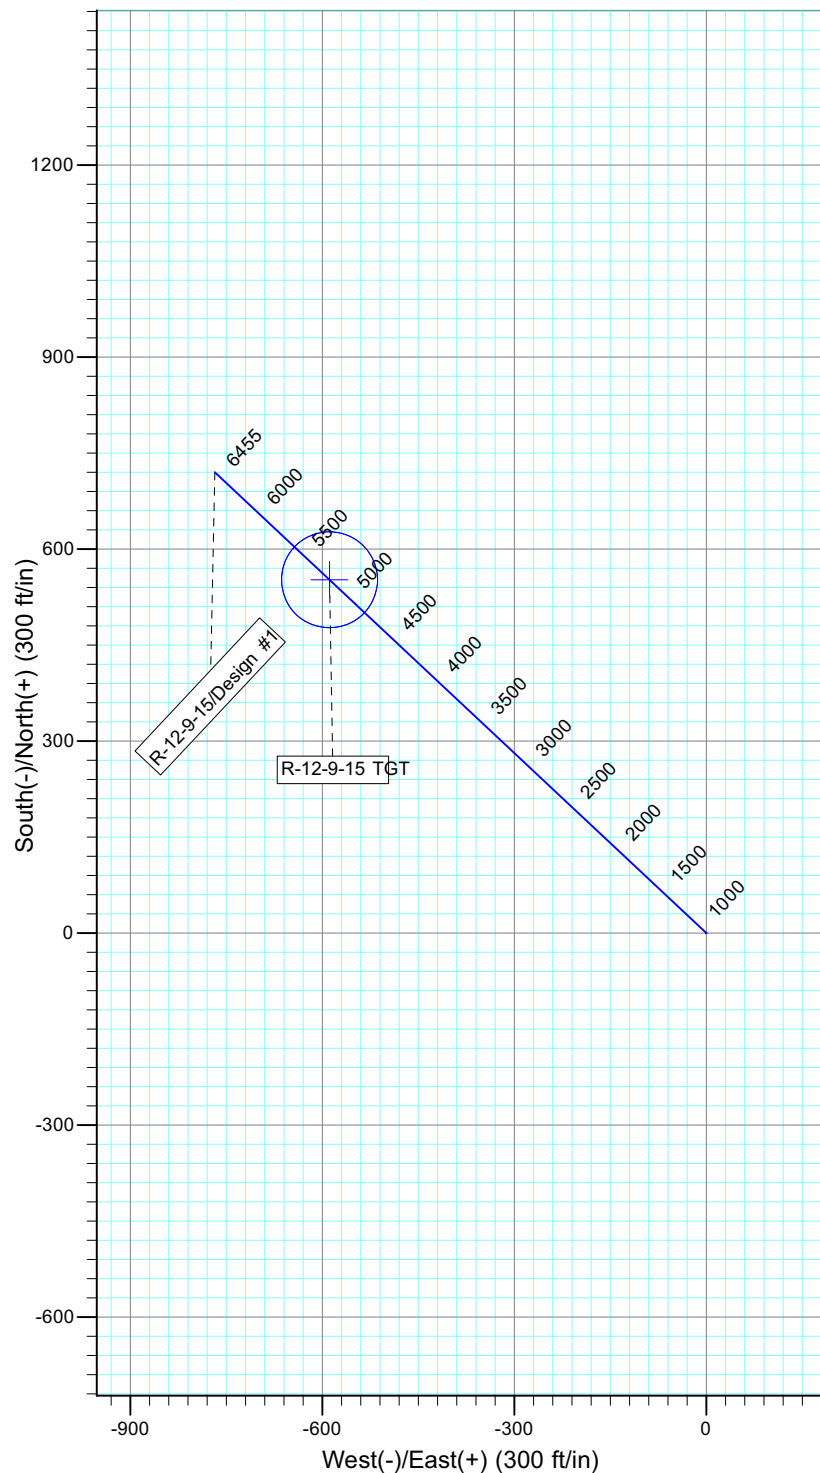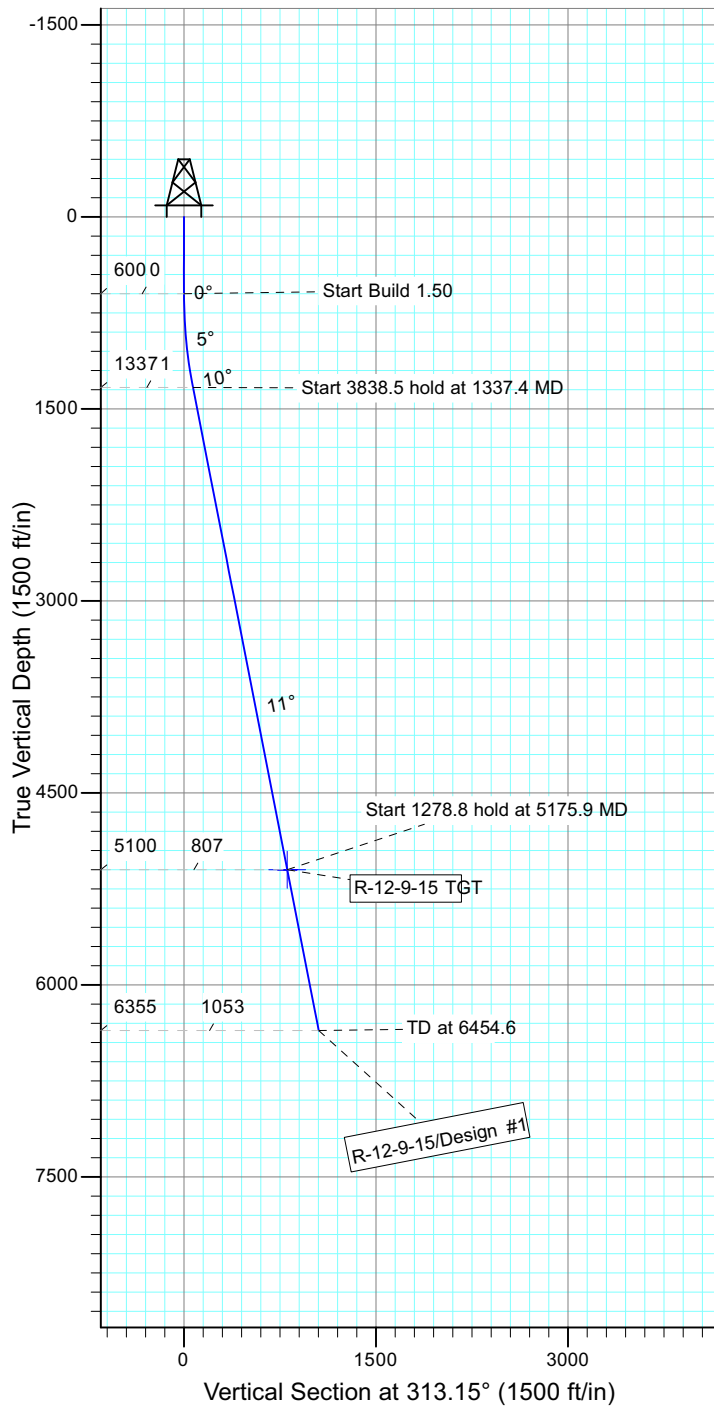

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
R-12-9-15 TGT	5100.0	552.2	-589.1	Circle (Radius: 75.0)


## SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1337.4	11.06	313.15	1332.8	48.5	-51.8	1.50	313.15	71.0	
4	5175.9	11.06	313.15	5100.0	552.2	-589.1	0.00	0.00	807.4	R-12-9-15 TGT
5	6454.6	11.06	313.15	6355.0	720.0	-768.0	0.00	0.00	1052.7	







Project: USGS Myton SW (UT)  
 Site: SECTION 12 T9S, R15E  
 Well: B-13-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.33°

Magnetic Field  
 Strength: 52226.4snT  
 Dip Angle: 65.76°  
 Date: 2011/08/29  
 Model: IGRF2010

KOP @ 600'  
 DOGLENG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

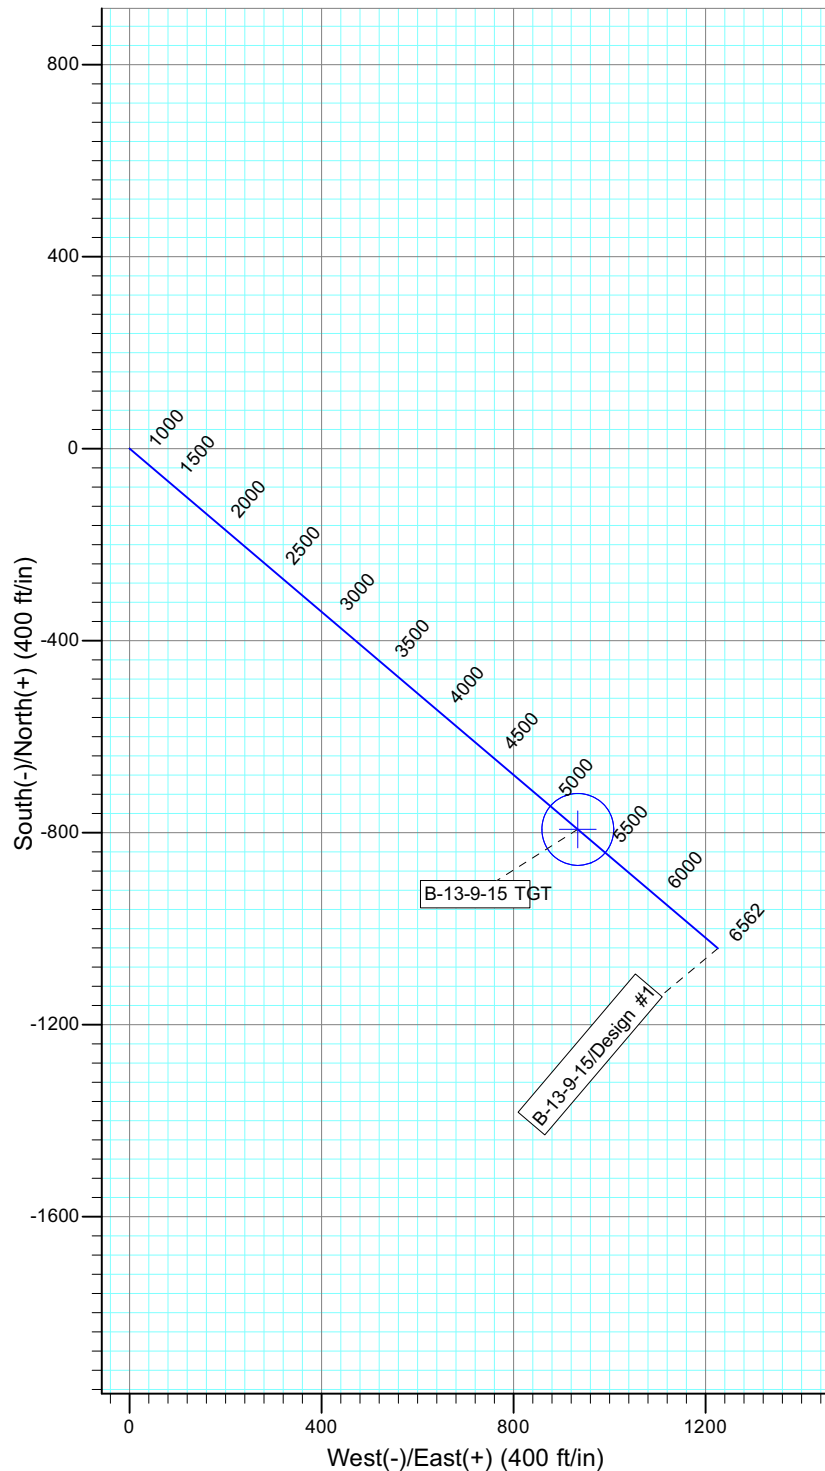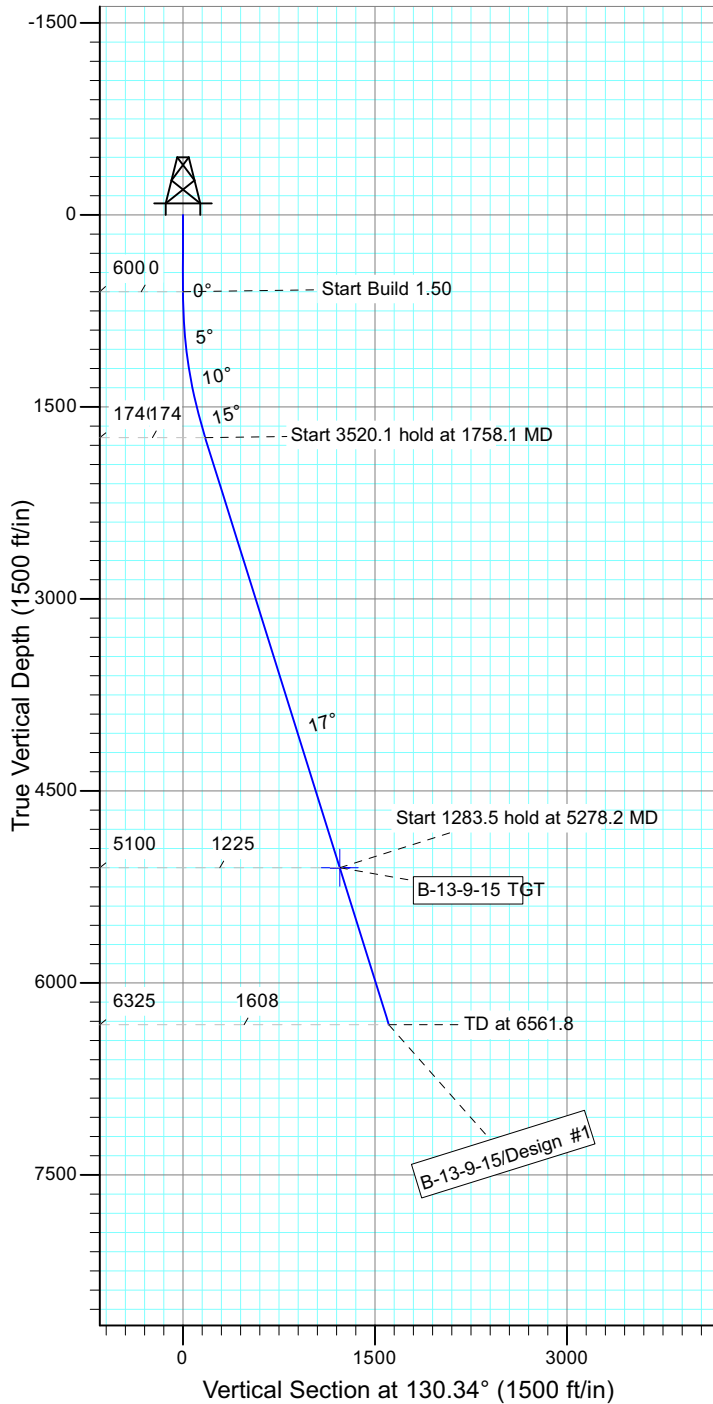

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
B-13-9-15 TGT	5100.0	-793.1	933.9	Circle (Radius: 75.0)


## SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1758.1	17.37	130.34	1740.4	-112.8	132.8	1.50	130.34	174.2	
4	5278.2	17.37	130.34	5100.0	-793.1	933.9	0.00	0.00	1225.2	B-13-9-15 TGT
5	6561.8	17.37	130.34	6325.0	-1041.2	1226.0	0.00	0.00	1608.4	







Project: USGS Myton SW (UT)  
 Site: SECTION 5 T9, R16  
 Well: N-5-9-16  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.37°

Magnetic Field  
 Strength: 52280.1snT  
 Dip Angle: 65.80°  
 Date: 2011/04/21  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

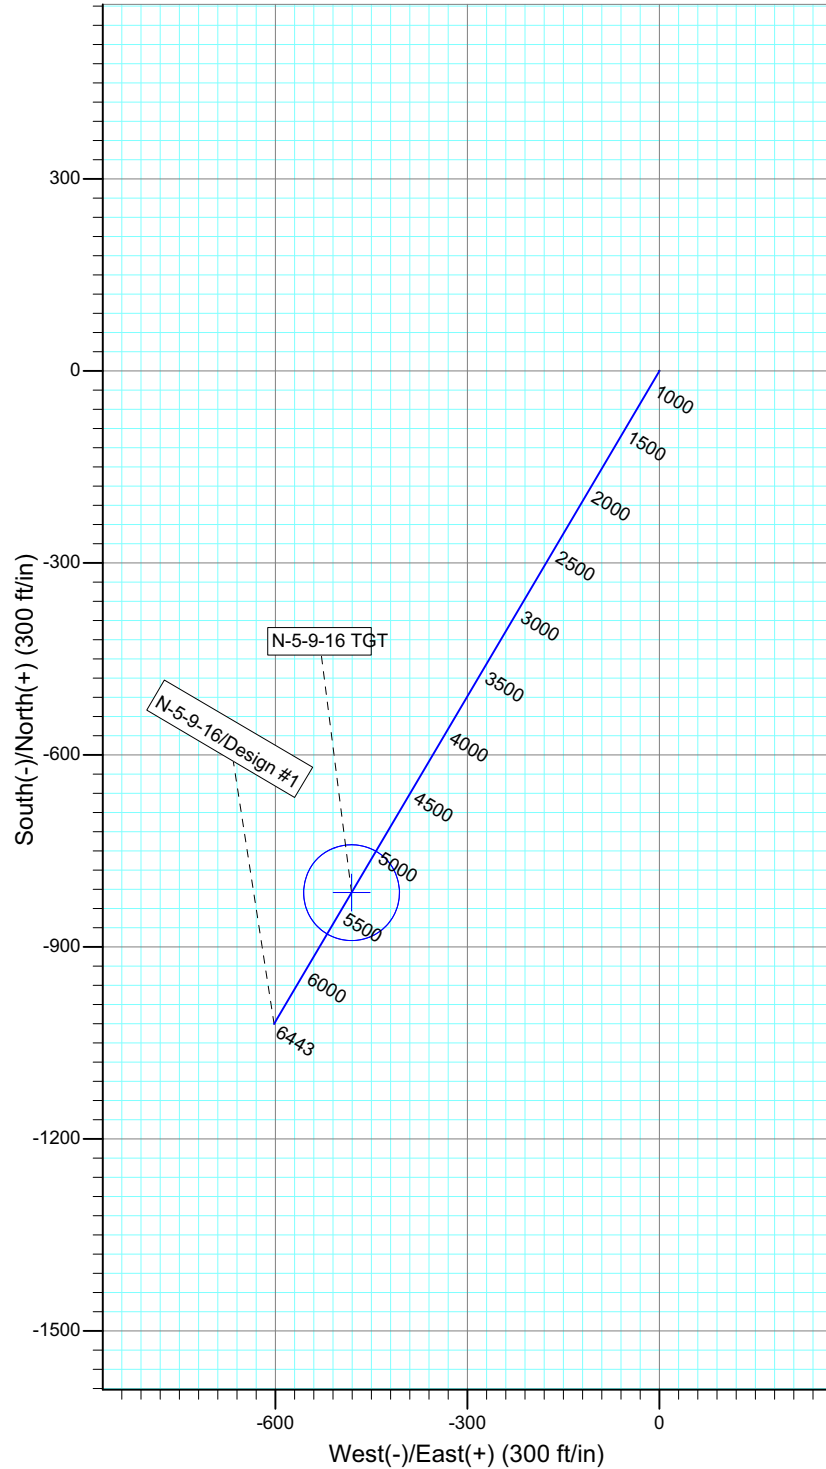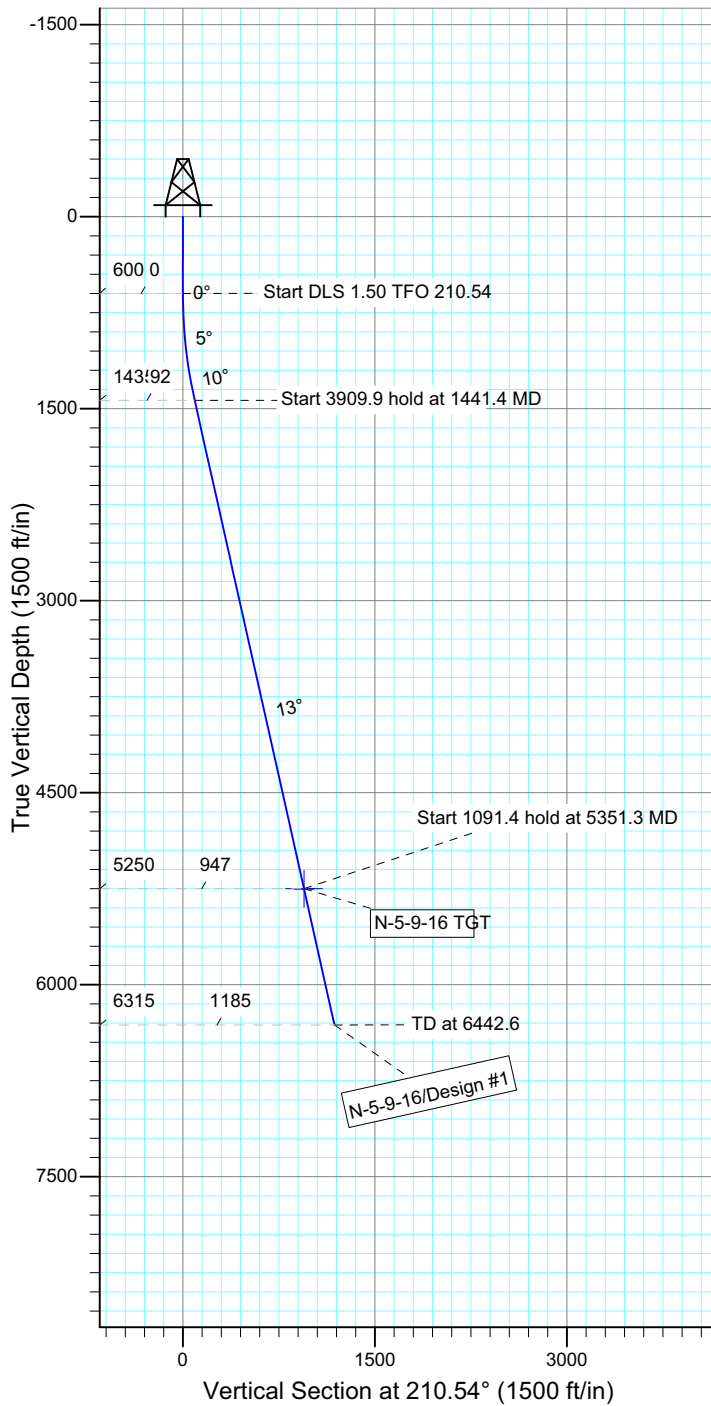

## WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
N-5-9-16 TGT	5250.0	-815.3	-481.0	Circle (Radius: 75.0)

## SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1441.4	12.62	210.54	1434.6	-79.5	-46.9	1.50	210.54	92.3	
4	5351.3	12.62	210.54	5250.0	-815.3	-481.0	0.00	0.00	946.6	N-5-9-16 TGT
5	6442.6	12.62	210.54	6315.0	-1020.7	-602.2	0.00	0.00	1185.1	





## WORKSHEET APPLICATION FOR PERMIT TO DRILL

**APD RECEIVED:** 11/29/2011**API NO. ASSIGNED:** 43013510910000**WELL NAME:** GMBU Q-11-9-15**OPERATOR:** NEWFIELD PRODUCTION COMPANY (N2695)**PHONE NUMBER:** 435 646-4825**CONTACT:** Mandie Crozier**PROPOSED LOCATION:** NESW 11 090S 150E**Permit Tech Review:** ☒**SURFACE:** 1965 FSL 1968 FWL**Engineering Review:** ☐**BOTTOM:** 1294 FSL 1228 FWL**Geology Review:** ☒**COUNTY:** DUCHESNE**LATITUDE:** 40.04354**LONGITUDE:** -110.20191**UTM SURF EASTINGS:** 568082.00**NORTHINGS:** 4432894.00**FIELD NAME:** MONUMENT BUTTE**LEASE TYPE:** 1 - Federal**LEASE NUMBER:** UTU-74826**PROPOSED PRODUCING FORMATION(S):** GREEN RIVER**SURFACE OWNER:** 1 - Federal**COALBED METHANE:** NO**RECEIVED AND/OR REVIEWED:**☒ **PLAT**☒ **Bond:** FEDERAL - WYB000493☐ **Potash**☐ **Oil Shale 190-5**☐ **Oil Shale 190-3**☐ **Oil Shale 190-13**☒ **Water Permit:** 437478☐ **RDCC Review:**☐ **Fee Surface Agreement**☐ **Intent to Commingle****Commingle Approved****LOCATION AND SITING:**☐ **R649-2-3.****Unit:** GMBU (GRRV)☐ **R649-3-2. General**☐ **R649-3-3. Exception**☒ **Drilling Unit****Board Cause No:** Cause 213-11**Effective Date:** 11/30/2009**Siting:** Suspends General Siting☒ **R649-3-11. Directional Drill****Comments:** Presite Completed**Stipulations:** 4 - Federal Approval - dmason  
15 - Directional - dmason  
27 - Other - bhill**RECEIVED: December 05, 2011**



GARY R. HERBERT  
Governor

GREGORY S. BELL  
Lieutenant Governor

## State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA  
Division Director

### Permit To Drill

\*\*\*\*\*

**Well Name:** GMBU Q-11-9-15  
**API Well Number:** 43013510910000  
**Lease Number:** UTU-74826  
**Surface Owner:** FEDERAL  
**Approval Date:** 12/5/2011

**Issued to:**

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

**Authority:**

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

**Duration:**

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

**General:**

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

**Conditions of Approval:**

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

**Notification Requirements:**

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels at 801-538-5284 (please leave a voicemail message if not available)  
OR  
submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <http://oilgas.ogm.utah.gov>

**Reporting Requirements:**

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

**Approved By:**

A handwritten signature in black ink, appearing to read "John Rogers", written over a horizontal line.

For John Rogers  
Associate Director, Oil & Gas

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

RECEIVED

NOV 30 2011

FORM APPROVED  
OMB No. 1004-0136  
Expires July 31, 2010

APPLICATION FOR PERMIT TO DRILL OR REENTER

BLM

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU74826
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator NEWFIELD PRODUCTION COMPANY Contact: MANDIE CROZIER Email: mcrozier@newfield.com		7. If Unit or CA Agreement, Name and No. GREATER MONUMENT
3a. Address ROUTE #3 BOX 3630 MYTON, UT 84052		8. Lease Name and Well No. GMBU Q-11-9-15
3b. Phone No. (include area code) Ph: 435-646-4825 Fx: 435-646-3031		9. API Well No. 43-013-S1091
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface NESW 1965FSL 1968FWL At proposed prod. zone SWSW 1294FSL 1228FWL		10. Field and Pool, or Exploratory MONUMENT BUTTE
14. Distance in miles and direction from nearest town or post office* 15.0		11. Sec., T., R., M., or Blk. and Survey or Area Sec 11 T9S R15E Mer SLB
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1294'	16. No. of Acres in Lease 2189.90	12. County or Parish DUCHESNE
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 1038'	19. Proposed Depth 6445 MD 6355 TVD	13. State UT
21. Elevations (Show whether DF, KB, RT, GL, etc.) 6165 GL	22. Approximate date work will start 03/31/2012	17. Spacing Unit dedicated to this well 20.00
		20. BLM/BIA Bond No. on file WYB000493
		23. Estimated duration 7 DAYS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature (Electronic Submission)	Name (Printed/Typed) MANDIE CROZIER Ph: 435-646-4825	Date 11/29/2011
Title REGULATORY ANALYST		
Approved by (Signature) 	Name (Printed/Typed) Jerry Kenczka	Date JUN 27 2012
Title Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE	

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

CONDITIONS OF APPROVAL ATTACHED

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #124391 verified by the BLM Well Information System  
For NEWFIELD PRODUCTION COMPANY, sent to the Vernal  
Committed to AFMSS for processing by LESLIE ROBINSON on 12/01/2011

RECEIVED

JUL 05 2012

DIV. OF OIL, GAS & MINING

UDOGM

NOTICE OF APPROVAL

\*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\*

11/29/2011

11/29/2011





UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



**CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL**

Company: Newfield Production Company  
Well No: GMBU Q-11-9-15  
API No: 43-013-51091

Location: NESW, Sec 11, T9S, R15E  
Lease No: UTU-74826  
Agreement: Greater Monument Butte Unit

**OFFICE NUMBER: (435) 781-4400**

**OFFICE FAX NUMBER: (435) 781-3420**

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR  
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

**NOTIFICATION REQUIREMENTS**

Location Construction (Notify Environmental Scientist)	-	Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	-	Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings to: <a href="mailto:blm_ut_vn_opreport@blm.gov">blm ut vn opreport@blm.gov</a>
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM  
CONDITIONS OF APPROVAL (COAs)***

- All new and replacement internal combustion gas field engines of less than or equal to 300 design-rated horsepower must not emit more than 2 gms of NO<sub>x</sub> per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower.
- All and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 gms of NO<sub>x</sub> per horsepower-hour.
- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

**Wildlife**

**If construction and drilling is anticipated during any of the following wildlife seasonal spatial restrictions, a BLM biologist or a qualified consulting firm biologist must conduct applicable surveys using an accepted protocol prior to any ground disturbing activities.**

- The proposed project is within 0.5 mile of a **golden eagle nest**. If drilling or construction is proposed from January 1 to August 31, then a nest survey will be conducted by a qualified biologist. If it is determined by that the nest is inactive, then permission to proceed may be granted by the BLM Authorized Officer. If the nest is determined to be active, then the timing restriction will remain in effect.

**Air Quality**

- All internal combustion equipment will be kept in good working order.
- Water or other approved dust suppressants will be used at construction sites and along roads, as determined appropriate by the Authorized Officer.
- Open burning of garbage or refuse will not occur at well sites or other facilities.
- Low bleed pneumatics will be installed on separator dump valves and other controllers.
- During completion, flaring will be limited as much as possible. Production equipment and gathering lines will be installed as soon as possible.
- Well site telemetry will be utilized as feasible for production operations.

**Reclamation**

- Reclamation will be completed in accordance with the Newfield Exploration Company Castle Peak and Eight Mile Flat Reclamation Plan on file with the Vernal Field Office of the BLM.

- Appropriate erosion control and revegetation measures will be employed. In areas with unstable soils where seeding alone may not adequately control erosion, grading will be used to minimize slopes and water bars will be installed on disturbed slopes. Erosion control efforts will be monitored by Newfield and, if necessary, modifications will be made to control erosion.

#### **Monitoring and Reporting**

- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) that designates the proposed site-specific monitoring and reference sites chosen for the location. A description of the proposed sites shall be included, as well as a map showing the locations of the proposed sites.
- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) 3 growing seasons after reclamation efforts have occurred evaluating the status of the reclaimed areas in order to determine whether the BLM standards set forth in the Green River District Reclamation Guidelines have been met (30% or greater basal cover).

#### **S.O.P.**

- After cessation of drilling and completion operations, any visible or measurable layer of oil must be removed from the surface of the reserve pit and the pit kept free of oil.
- Pits must be free of oil and other liquid and solid wastes prior to filling. Pit liners must not be breached (cut) or filled (squeezed) while still containing fluids. The pit liner must be removed to the solids level or treated to prevent its reemergence to the surface or its interference with long-term successful revegetation.

**DOWNHOLE PROGRAM  
CONDITIONS OF APPROVAL (COAs)**

**SITE SPECIFIC DOWNHOLE COAs:**

- Newfield Production Co. shall comply with all applicable requirements in the SOP (version: "Greater Monument Butte Green River Development Program", June 24, 2008). The operator shall also comply with applicable laws and regulations; with lease terms, Onshore Oil and Gas Orders, NTL's; and with other orders and instructions of the authorized officer.

**All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to.** The following items are emphasized:

**DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS**

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB

or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to BLM\_UT\_VN\_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.



## OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- For information regarding production reporting, contact the Office of Natural Resources Revenue (ONRR) at [www.ONRR.gov](http://www.ONRR.gov).
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
  - Operator name, address, and telephone number.
  - Well name and number.
  - Well location (¼¼, Sec., Twn, Rng, and P.M.).
  - Date well was placed in a producing status (date of first production for which royalty will be paid).
  - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
  - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
  - Unit agreement and/or participating area name and number, if applicable.
  - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs,

core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# Ross 29 Submitted By  
Branden Arnold Phone Number 435-401-0223  
Well Name/Number GMBU Q-11-9-15  
Qtr/Qtr NE/SW Section 11 Township 9S Range 15E  
Lease Serial Number UTU-74826  
API Number 43-013-51091

Spud Notice – Spud is the initial spudding of the well, not drilling  
out below a casing string.

Date/Time 7/29/12 8:00 AM ☒ PM ☐

Casing – Please report time casing run starts, not cementing  
times.

- ☒ Surface Casing
- ☐ Intermediate Casing
- ☐ Production Casing
- ☐ Liner
- ☐ Other

Date/Time 7/29/12 3:00 AM ☐ PM ☒

BOPE

- ☐ Initial BOPE test at surface casing point
- ☐ BOPE test at intermediate casing point
- ☐ 30 day BOPE test
- ☐ Other

Date/Time \_\_\_\_\_ AM ☐ PM ☐

Remarks \_\_\_\_\_

---

STATE OF UTAH  
DIVISION OF OIL, GAS AND MINING  
ENTITY ACTION FORM -FORM 6

OPERATOR: **NEWFIELD PRODUCTION COMPANY**  
ADDRESS: **RT. 3 BOX 3630**  
**MYTON, UT 84052**

OPERATOR ACCT. NO. **N2695**

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
B	99999	17400	4301351090	GMBU M-11-9-15	NESW	11	9S	15E	DUCHESNE	8/7/2012	8/20/12
WELL 1 COMMENTS: <b>GRRV BHL: Sure</b>											
A	99999	18678	4301350557	UTE TRIBAL 1-16-4-1W	NENE	16	4S	1W	DUCHESNE	7/27/2012	8/20/12
WELL 1 COMMENTS: <b>GRRV BHL: none</b>											
B	99999	17400	4301351091	GMBU Q-11-9-15	NESW	11	9S	15E	DUCHESNE	8/6/2012	8/20/12
WELL 1 COMMENTS: <b>GRRV BHL: SWSW</b>											
B	99999	17400	4301351102	GMBU H-11-9-15	SENW	11	9S	15E	DUCHESNE	8/4/2012	8/20/12
WELL 1 COMMENTS: <b>GRRV BHL: none</b>											
B	99999	17400	4301351103	GMBU N-11-9-15	SENW	11	9S	15E	DUCHESNE	8/5/2012	8/20/12
WELL 1 COMMENTS: <b>GRRV BHL: nwsu</b>											
A	99999	18679	4301351508	PETERSON 3-20-3-2WH	SESW	17	3S	2W	DUCHESNE	7/18/2012	8/20/12
WELL 1 COMMENTS: <b>GRRV BHL: S20 SESW</b>											
A	99999	18680	4304751787	UTE TRIBAL 9-4-4-1E	NESE	4	4S	1E	UINTAH	7/19/2012	8/20/12
WELL 1 COMMENTS: <b>WSTC</b>											

- A - 1 new entity for new well (single well on...)  
B - well to existing entity (group or unit well)  
C - from one existing entity to another existing entity  
D - well from one existing entity to a new entity  
E - ther (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected

RECEIVED

AUG 15 2012

Div. of Oil, Gas & Mining

**CONFIDENTIAL**  
*Alaska Robison*  
Signature  
Production Clerk  
8/9/12

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**SUNDRY NOTICES AND REPORTS ON WELLS**  
**Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.**

FORM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

**SUBMIT IN TRIPLICATE - Other Instructions on page 2**

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630

Myton, UT 84052

3b. Phone (include area code)

435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1965 FSL 1968 FSL

Section 11 T9S R15E

5. Lease Serial No.

USA UTU-74826

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or

GMBU

8. Well Name and No.

GMBU Q-11-9-15

9. API Well No.

4301351091

10. Field and Pool, or Exploratory Area

GREATER MB UNIT

11. County or Parish, State

DUCHESNE, UT

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Spud Notice _____
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	_____

13. Describe Proposed or Completed Operation: (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 8/6/12 MIRU Ross #29. Spud well @9:00 AM. Drill 320' of 12 1/4" hole with air mist. TIH W/ 7 Jt's 8 5/8" J-55 24# csgn. Set @ 319.62. On 8/8/12 cement with 160 sks of class "G" w/ 2% CaCL<sub>2</sub> + 0.25#/sk Cello- Flake Mixed @ 15.8ppg w/ 1.17ft3/sk yield. Returned 5 barrels cement to pit. WOC.

I hereby certify that the foregoing is true and correct (Printed/ Typed)

Branden Arnold

Signature

*Branden Arnold*

Title

Date

08/09/2012

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by \_\_\_\_\_

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on page 2)

**RECEIVED**

**SEP 06 2012**

**DIV. OF OIL, GAS & MINING**



# Casing / Liner Detail

Well GMBU Q-11-9-15  
 Prospect Monument Butte  
 Foreman  
 Run Date:  
 String Type Surface, 8.625", 24#, J-55, STC (Generic)

## - Detail From Top To Bottom -

Depth	Length	JTS	Description	OD	ID
319.62			10' KB		
10.00	1.42		Wellhead		
11.42	262.45	6	8 5/8 Casing	8.625	
273.87	44.85	1	Shoe Joint	8.625	
318.72	0.90	1	Guide Shoe	8.625	
319.62			-		

## Cement Detail

Cement Company: BJ

Slurry	# of Sacks	Weight (ppg)	Yield	Volume (ft³)	Description - Slurry Class and Additives
Slurry 1	160	15.8	1.17	187.2	Class G+2%kcl+.25#CF

Stab-In-Job?	No
BHT:	0
Initial Circulation Pressure:	
Initial Circulation Rate:	
Final Circulation Pressure:	
Final Circulation Rate:	
Displacement Fluid:	Water
Displacement Rate:	
Displacement Volume:	17
Mud Returns:	
Centralizer Type And Placement:	

Cement To Surface?	Yes
Est. Top of Cement:	0
Plugs Bumped?	Yes
Pressure Plugs Bumped:	400
Floats Holding?	No
Casing Stuck On / Off Bottom?	No
Casing Reciprocated?	No
Casing Rotated?	No
CIP:	9:21
Casing Wt Prior To Cement:	
Casing Weight Set On Slips:	

Middle of first, top of second and third for a total of three.



<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		<b>FORM 9</b>
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU-74826
<b>1. TYPE OF WELL</b> Oil Well		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>
<b>2. NAME OF OPERATOR:</b> NEWFIELD PRODUCTION COMPANY		<b>7. UNIT or CA AGREEMENT NAME:</b> GMBU (GRRV)
<b>3. ADDRESS OF OPERATOR:</b> Rt 3 Box 3630 , Myton, UT, 84052		<b>8. WELL NAME and NUMBER:</b> GMBU Q-11-9-15
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1965 FSL 1968 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: NESW Section: 11 Township: 09.0S Range: 15.0E Meridian: S		<b>9. API NUMBER:</b> 43013510910000
<b>PHONE NUMBER:</b> 435 646-4825 Ext		<b>9. FIELD and POOL or WILDCAT:</b> MONUMENT BUTTE
<b>COUNTY:</b> DUCHESNE		<b>STATE:</b> UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
<b>TYPE OF SUBMISSION</b>	<b>TYPE OF ACTION</b>	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:  <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:  <input type="checkbox"/> SPUD REPORT Date of Spud:  <input checked="" type="checkbox"/> DRILLING REPORT Report Date: 9/15/2012	<div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <input type="checkbox"/> ACIDIZE   <input type="checkbox"/> CHANGE TO PREVIOUS PLANS   <input type="checkbox"/> CHANGE WELL STATUS   <input type="checkbox"/> DEEPEN   <input type="checkbox"/> OPERATOR CHANGE   <input checked="" type="checkbox"/> PRODUCTION START OR RESUME   <input type="checkbox"/> REPERFORATE CURRENT FORMATION   <input type="checkbox"/> TUBING REPAIR   <input type="checkbox"/> WATER SHUTOFF   <input type="checkbox"/> WILDCAT WELL DETERMINATION         </div> <div style="width: 33%;"> <input type="checkbox"/> ALTER CASING   <input type="checkbox"/> CHANGE TUBING   <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS   <input type="checkbox"/> FRACTURE TREAT   <input type="checkbox"/> PLUG AND ABANDON   <input type="checkbox"/> RECLAMATION OF WELL SITE   <input type="checkbox"/> SIDETRACK TO REPAIR WELL   <input type="checkbox"/> VENT OR FLARE   <input type="checkbox"/> SI TA STATUS EXTENSION   <input type="checkbox"/> OTHER         </div> <div style="width: 33%;"> <input type="checkbox"/> CASING REPAIR   <input type="checkbox"/> CHANGE WELL NAME   <input type="checkbox"/> CONVERT WELL TYPE   <input type="checkbox"/> NEW CONSTRUCTION   <input type="checkbox"/> PLUG BACK   <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION   <input type="checkbox"/> TEMPORARY ABANDON   <input type="checkbox"/> WATER DISPOSAL   <input type="checkbox"/> APD EXTENSION           OTHER: <input style="width: 100%;" type="text"/> </div> </div>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. <div style="display: flex; justify-content: space-between;"> <div style="width: 60%;"> <p>The above well was placed on production on 09/15/2012 at 19:30 hours.</p> </div> <div style="width: 35%; text-align: right;"> <p><b>Accepted by the Utah Division of Oil, Gas and Mining</b>  <b>FOR RECORD ONLY</b>          November 02, 2012</p> </div> </div>		
<b>NAME (PLEASE PRINT)</b> Jennifer Peatross	<b>PHONE NUMBER</b> 435 646-4885	<b>TITLE</b> Production Technician
<b>SIGNATURE</b> N/A	<b>DATE</b> 11/2/2012	

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB NO. 1004-0137  
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. Lease Serial No.  
UTU-74826

1a. Type of Well ☒ Oil Well ☐ Gas Well ☐ Dry ☐ Other  
b. Type of Completion: ☒ New Well ☐ Work Over ☐ Deepen ☐ Plug Back ☐ Diff. Resrv.,  
Other: \_\_\_\_\_

6. If Indian, Allottee or Tribe Name

2. Name of Operator  
NEWFIELD EXPLORATION COMPANY

7. Unit or CA Agreement Name and No.  
GMBU (GRRV)

3. Address  
1401 17TH ST. SUITE 1000 DENVER, CO 80202

3a. Phone No. (include area code)  
(435) 646-3721

8. Lease Name and Well No.  
GMBU Q-11-9-15

4. Location of Well (Report location clearly and in accordance with Federal requirements)\*

At surface 1965' FSL & 1968' FWL (NE/SW) SEC. 11, T9S, R15E (UTU-74826)

At top prod. interval reported below 1548' FSL & 1528' FWL (NE/SW) SEC. 11, T9S, R15E (UTU-74826)

At total depth 1300' FSL & 1230' FWL (SW/SW) SEC. 11, T9S, R15E (UTU-74826)

RECEIVED  
DEC 13 2012

10. Field and Pool or Exploratory  
MONUMENT BUTTE

11. Sec., T., R., M., on Block and  
Survey or Area  
SEC. 11, T9S, R15E

12. County or Parish  
DUCHESNE  
13. State  
UT

14. Date Spudded  
08/06/2012

15. Date T.D. Reached  
08/19/2012

16. Date Completed 09/15/2012  
☐ D & A ☒ Ready to Prod.

17. Elevations (DF, RKB, RT, GL)\*  
6165' GL 6175' KB

18. Total Depth: MD 6402'  
TVD 6313'

19. Plug Back T.D.: MD 6337'  
TVD 6249'

20. Depth Bridge Plug Set: MD  
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)

DUAL IND GRD, SP, COMP. DENSITY, COMP. NEUTRON, GR, CALIPER, CMT BOND

22. Was well cored? ☒ No ☐ Yes (Submit analysis)  
Was DST run? ☒ No ☐ Yes (Submit report)  
Directional Survey? ☐ No ☒ Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	8-5/8" J-55	24#	0	320'		160 CLASS "G"			
7-7/8"	5-1/2" J-55	15.5#	0	6384'		240 PRIMLITE		54'	
						470 50/50 POZ			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-7/8"	EOT@ 6015'	TA @ 5917'						

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Green River	4266'	5947'	4266-5947'	0.34"	93	
B)						
C)						
D)						

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Depth Interval	Amount and Type of Material
4266-5947'	Frac w/ 272615# 20/40 white sand and 2735 bbls Lightning 17 fluid, in 6 stages.

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
9/15/12	9/25/12	24	→	115	0	68			2-1/2" x 1-3/4" x 20' x 21' x 24' RHAC Pump
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→					PRODUCING	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

\*(See instructions and spaces for additional data on page 2)

## 28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

## 28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

## 29. Disposition of Gas (Solid, used for fuel, vented, etc.)

NO MEASURABLE GAS

## 30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

## 31. Formation (Log) Markers

## GEOLOGICAL MARKERS

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
GREEN RIVER	4266'	5947'		GARDEN GULCH MARKER GARDEN GULCH 1	3759' 3997'
				GARDEN GULCH 2 POINT 3 MARKER	4103' 4359'
				X MRKR Y MRKR	4638' 4673'
				DOUGLAS CREEK MRKR BI-CARBONATE	4784' 5026'
				B LIMESTONE CASTLE PEAK	5131' 5716'
				BASAL CARBONATE WASATCH	6149' 6279'

## 32. Additional remarks (include plugging procedure):

## 33. Indicate which items have been attached by placing a check in the appropriate boxes:

- ☐ Electrical/Mechanical Logs (1 full set req'd.)     
 ☐ Geologic Report     
 ☐ DST Report     
 ☒ Directional Survey  
☐ Sundry Notice for plugging and cement verification     
 ☐ Core Analysis     
 ☐ Other:

## 34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)\*

Name (please print) Jennifer Peatross

Title Production Technician

Signature

Date 10/24/2012

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 3)

(Form 3160-4, page 2)

**NEWFIELD**



# **NEWFIELD EXPLORATION**

**USGS Myton SW (UT)  
SECTION 11 T 9S R15E  
Q-11-9-15**

**Wellbore #1**

**Design: Actual**

## **Standard Survey Report**

**10 October, 2012**







# Payzone Directional Survey Report



Company:	NEWFIELD EXPLORATION	Local Co-ordinate Reference:	Well Q-11-9-15
Project:	USGS Myton SW (UT)	TVD Reference:	Q-11-9-15 @ 6175.0ft (NDSI SS #1)
Site:	SECTION 11 T 9S R15E	MD Reference:	Q-11-9-15 @ 6175.0ft (NDSI SS #1)
Well:	Q-11-9-15	North Reference:	True
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Actual	Database:	EDM 2003.21 Single User Db

Project	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		

Site	SECTION 11 T 9S R15E		
Site Position:		Northing:	7,188,000.00 ft
From:	Lat/Long	Easting:	2,004,500.00 ft
Position Uncertainty:	0.0 ft	Slot Radius:	"
		Latitude:	40° 2' 44.351 N
		Longitude:	110° 11' 57.926 W
		Grid Convergence:	0.83 °

Well	Q-11-9-15, SHL LAT: 40 02 36.83 LONG: -110 12 06.59		
Well Position	+N/-S	0.0 ft	Northing:
	+E/-W	0.0 ft	Easting:
Position Uncertainty	0.0 ft	Wellhead Elevation:	6,175.0 ft
		Latitude:	40° 2' 36.830 N
		Longitude:	110° 12' 6.590 W
		Ground Level:	6,165.0 ft

Wellbore	Wellbore #1		
Magnetics	Model Name	Sample Date	Declination
	IGRF2010	8/11/2011	(°)
			11.35
			Dip Angle
			(°)
			65.76
			Field Strength
			(nT)
			52,229

Design	Actual		
Audit Notes:			
Version:	1.0	Phase:	ACTUAL
		Tie On Depth:	0.0
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(ft)	(ft)	(ft)
	0.0	0.0	0.0
			Direction
			(°)
			226.90

Survey Program	Date 10/10/2012		
From	To	Survey (Wellbore)	Tool Name
(ft)	(ft)		
375.0	6,402.0	Survey #1 (Wellbore #1)	MWD
			Description
			MWD - Standard

Survey									
Measured	Inclination	Azimuth	Vertical	+N/-S	+E/-W	Vertical	Dogleg	Build	Turn
Depth	(°)	(°)	Depth	(ft)	(ft)	Section	Rate	Rate	Rate
(ft)			(ft)			(ft)	(°/100ft)	(°/100ft)	(°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
375.0	0.66	103.00	375.0	-0.5	2.1	-1.2	0.18	0.18	0.00
406.0	0.70	100.60	406.0	-0.6	2.5	-1.4	0.16	0.13	-7.74
436.0	0.70	109.40	436.0	-0.7	2.8	-1.6	0.36	0.00	29.33
467.0	0.70	128.60	467.0	-0.8	3.1	-1.7	0.75	0.00	61.94
497.0	0.90	153.60	497.0	-1.2	3.4	-1.7	1.33	0.67	83.33
528.0	1.20	185.20	528.0	-1.7	3.5	-1.4	2.07	0.97	101.94
558.0	1.80	196.50	558.0	-2.5	3.3	-0.7	2.22	2.00	37.67
589.0	2.50	192.50	588.9	-3.6	3.0	0.2	2.31	2.26	-12.90
619.0	3.00	199.50	618.9	-5.0	2.6	1.5	2.00	1.67	23.33
650.0	3.20	196.50	649.9	-6.6	2.1	3.0	0.83	0.65	-9.68
680.0	3.60	195.00	679.8	-8.3	1.6	4.5	1.37	1.33	-5.00
711.0	4.00	191.90	710.7	-10.3	1.1	6.2	1.45	1.29	-10.00



# Payzone Directional Survey Report



Company: NEWFIELD EXPLORATION  
Project: USGS Myton SW (UT)  
Site: SECTION 11 T 9S R15E  
Well: Q-11-9-15  
Wellbore: Wellbore #1  
Design: Actual

Local Co-ordinate Reference: Well Q-11-9-15  
TVD Reference: Q-11-9-15 @ 6175.0ft (NDSI SS #1)  
MD Reference: Q-11-9-15 @ 6175.0ft (NDSI SS #1)  
North Reference: True  
Survey Calculation Method: Minimum Curvature  
Database: EDM 2003.21 Single User Db

## Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
742.0	4.20	192.20	741.7	-12.4	0.7	8.0	0.65	0.65	0.97
772.0	4.60	196.20	771.6	-14.7	0.1	9.9	1.68	1.33	13.33
803.0	4.90	199.30	802.5	-17.1	-0.7	12.2	1.27	0.97	10.00
833.0	5.10	201.10	832.4	-19.6	-1.6	14.5	0.85	0.67	6.00
864.0	5.20	203.20	863.2	-22.1	-2.6	17.0	0.69	0.32	6.77
894.0	5.60	205.40	893.1	-24.7	-3.8	19.7	1.50	1.33	7.33
925.0	6.10	210.20	923.9	-27.5	-5.3	22.6	2.26	1.61	15.48
955.0	6.50	213.70	953.8	-30.3	-7.0	25.8	1.85	1.33	11.67
986.0	6.80	217.00	984.5	-33.2	-9.1	29.3	1.57	0.97	10.65
1,016.0	7.30	220.40	1,014.3	-36.1	-11.4	33.0	2.17	1.67	11.33
1,062.0	7.90	225.00	1,059.9	-40.6	-15.5	39.0	1.86	1.30	10.00
1,106.0	8.40	227.40	1,103.5	-44.9	-20.0	45.3	1.37	1.14	5.45
1,152.0	8.90	229.00	1,148.9	-49.5	-25.2	52.2	1.21	1.09	3.48
1,197.0	9.50	230.10	1,193.4	-54.1	-30.7	59.4	1.39	1.33	2.44
1,243.0	10.00	232.90	1,238.7	-59.0	-36.8	67.1	1.50	1.09	6.09
1,289.0	10.60	231.60	1,284.0	-64.0	-43.3	75.3	1.40	1.30	-2.83
1,333.0	10.80	230.30	1,327.2	-69.2	-49.6	83.5	0.71	0.45	-2.95
1,378.0	11.00	229.40	1,371.4	-74.7	-56.1	92.0	0.58	0.44	-2.00
1,422.0	11.10	228.10	1,414.6	-80.2	-62.4	100.4	0.61	0.23	-2.95
1,466.0	11.10	227.30	1,457.7	-85.9	-68.7	108.9	0.35	0.00	-1.82
1,512.0	11.20	227.90	1,502.9	-91.9	-75.3	117.8	0.33	0.22	1.30
1,558.0	11.20	227.50	1,548.0	-97.9	-81.9	126.7	0.17	0.00	-0.87
1,604.0	11.20	226.30	1,593.1	-104.0	-88.4	135.6	0.51	0.00	-2.61
1,647.0	11.10	226.60	1,635.3	-109.8	-94.4	144.0	0.27	-0.23	0.70
1,693.0	11.10	226.20	1,680.5	-115.9	-100.8	152.8	0.17	0.00	-0.87
1,737.0	10.90	225.30	1,723.6	-121.7	-106.9	161.2	0.60	-0.45	-2.05
1,781.0	10.70	225.40	1,766.9	-127.5	-112.7	169.4	0.46	-0.45	0.23
1,825.0	10.90	225.30	1,810.1	-133.3	-118.6	177.7	0.46	0.45	-0.23
1,871.0	10.90	227.00	1,855.3	-139.3	-124.9	186.4	0.70	0.00	3.70
1,914.0	10.80	228.00	1,897.5	-144.8	-130.8	194.5	0.50	-0.23	2.33
1,960.0	10.40	228.90	1,942.7	-150.4	-137.2	202.9	0.94	-0.87	1.96
2,004.0	10.20	229.40	1,986.0	-155.6	-143.1	210.8	0.50	-0.45	1.14
2,050.0	10.30	231.30	2,031.3	-160.8	-149.4	219.0	0.77	0.22	4.13
2,096.0	10.40	230.90	2,076.5	-166.0	-155.8	227.2	0.27	0.22	-0.87
2,141.0	10.50	230.50	2,120.8	-171.2	-162.2	235.4	0.27	0.22	-0.89
2,185.0	10.80	228.80	2,164.0	-176.4	-168.4	243.5	0.99	0.68	-3.86
2,231.0	10.50	227.60	2,209.2	-182.1	-174.7	252.0	0.81	-0.65	-2.61
2,277.0	10.20	227.30	2,254.5	-187.7	-180.8	260.2	0.66	-0.65	-0.65
2,320.0	10.30	227.50	2,296.8	-192.9	-186.4	267.9	0.25	0.23	0.47
2,366.0	9.90	227.30	2,342.1	-198.3	-192.4	276.0	0.87	-0.87	-0.43
2,412.0	10.10	228.40	2,387.4	-203.7	-198.3	283.9	0.60	0.43	2.39
2,456.0	10.20	227.90	2,430.7	-208.8	-204.1	291.7	0.30	0.23	-1.14
2,502.0	10.20	228.60	2,476.0	-214.3	-210.1	299.8	0.27	0.00	1.52
2,546.0	10.00	227.80	2,519.3	-219.4	-215.9	307.5	0.56	-0.45	-1.82
2,591.0	10.20	228.00	2,563.6	-224.7	-221.7	315.4	0.45	0.44	0.44
2,635.0	10.20	227.20	2,606.9	-230.0	-227.5	323.2	0.32	0.00	-1.82
2,681.0	10.20	227.90	2,652.2	-235.5	-233.5	331.4	0.27	0.00	1.52
2,725.0	10.30	229.80	2,695.5	-240.6	-239.4	339.2	0.80	0.23	4.32
2,771.0	10.10	230.10	2,740.7	-245.8	-245.6	347.3	0.45	-0.43	0.65
2,815.0	9.70	229.20	2,784.1	-250.7	-251.4	354.9	0.97	-0.91	-2.05
2,859.0	9.70	229.70	2,827.4	-255.6	-257.0	362.3	0.19	0.00	1.14
2,904.0	9.80	228.60	2,871.8	-260.5	-262.8	369.9	0.47	0.22	-2.44
2,948.0	9.60	229.10	2,915.2	-265.4	-268.4	377.3	0.49	-0.45	1.14
2,994.0	9.60	229.00	2,960.5	-270.5	-274.2	385.0	0.04	0.00	-0.22

# Payzone Directional Survey Report



Company: NEWFIELD EXPLORATION  
Project: USGS Myton SW (UT)  
Site: SECTION 11 T 9S R15E  
Well: Q-11-9-15  
Wellbore: Wellbore #1  
Design: Actual

Local Co-ordinate Reference: Well Q-11-9-15  
TVD Reference: Q-11-9-15 @ 6175.0ft (NDSI SS #1)  
MD Reference: Q-11-9-15 @ 6175.0ft (NDSI SS #1)  
North Reference: True  
Survey Calculation Method: Minimum Curvature  
Database: EDM 2003.21 Single User Db

## Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
3,038.0	9.40	229.10	3,003.9	-275.2	-279.7	392.2	0.46	-0.45	0.23
3,084.0	9.70	229.10	3,049.3	-280.2	-285.4	399.9	0.65	0.65	0.00
3,128.0	9.90	228.50	3,092.6	-285.1	-291.1	407.4	0.51	0.45	-1.36
3,171.0	9.90	227.70	3,135.0	-290.1	-296.6	414.7	0.32	0.00	-1.86
3,215.0	9.90	226.40	3,178.3	-295.2	-302.1	422.3	0.51	0.00	-2.95
3,261.0	10.40	225.30	3,223.6	-300.9	-307.9	430.4	1.17	1.09	-2.39
3,305.0	10.40	226.10	3,266.9	-306.4	-313.6	438.4	0.33	0.00	1.82
3,351.0	10.30	226.30	3,312.1	-312.2	-319.6	446.6	0.23	-0.22	0.43
3,396.0	10.50	226.00	3,356.4	-317.8	-325.4	454.7	0.46	0.44	-0.67
3,442.0	10.50	226.80	3,401.6	-323.6	-331.5	463.1	0.32	0.00	1.74
3,486.0	10.50	228.00	3,444.9	-329.0	-337.4	471.1	0.50	0.00	2.73
3,530.0	10.40	227.90	3,488.2	-334.3	-343.3	479.1	0.23	-0.23	-0.23
3,574.0	10.40	227.20	3,531.4	-339.7	-349.2	487.1	0.29	0.00	-1.59
3,618.0	10.30	227.90	3,574.7	-345.0	-355.0	495.0	0.37	-0.23	1.59
3,661.0	10.40	228.00	3,617.0	-350.2	-360.8	502.7	0.24	0.23	0.23
3,707.0	10.40	227.50	3,662.3	-355.8	-366.9	511.0	0.20	0.00	-1.09
3,753.0	10.30	228.40	3,707.5	-361.3	-373.0	519.3	0.41	-0.22	1.96
3,799.0	10.10	228.10	3,752.8	-366.7	-379.1	527.4	0.45	-0.43	-0.65
3,844.0	10.00	229.10	3,797.1	-371.9	-385.0	535.2	0.45	-0.22	2.22
3,890.0	9.80	229.00	3,842.4	-377.1	-391.0	543.2	0.44	-0.43	-0.22
3,936.0	9.90	229.00	3,887.7	-382.3	-396.9	551.0	0.22	0.22	0.00
3,982.0	9.80	230.30	3,933.1	-387.4	-402.9	558.9	0.53	-0.22	2.83
4,028.0	10.20	231.40	3,978.4	-392.4	-409.1	566.8	0.96	0.87	2.39
4,071.0	10.20	232.40	4,020.7	-397.1	-415.1	574.4	0.41	0.00	2.33
4,115.0	10.10	231.30	4,064.0	-401.9	-421.2	582.2	0.50	-0.23	-2.50
4,159.0	10.30	230.70	4,107.3	-406.8	-427.2	589.9	0.51	0.45	-1.36
4,205.0	10.20	230.70	4,152.6	-412.0	-433.6	598.1	0.22	-0.22	0.00
4,251.0	10.00	229.90	4,197.9	-417.1	-439.8	606.1	0.53	-0.43	-1.74
4,295.0	10.00	229.90	4,241.2	-422.1	-445.6	613.8	0.00	0.00	0.00
4,340.0	10.10	229.70	4,285.5	-427.1	-451.6	621.6	0.24	0.22	-0.44
4,384.0	9.80	228.50	4,328.8	-432.1	-457.4	629.2	0.83	-0.68	-2.73
4,430.0	9.40	227.80	4,374.2	-437.2	-463.1	636.9	0.91	-0.87	-1.52
4,474.0	9.60	228.60	4,417.6	-442.1	-468.5	644.1	0.54	0.45	1.82
4,520.0	9.80	230.50	4,462.9	-447.1	-474.4	651.9	0.82	0.43	4.13
4,566.0	10.30	231.00	4,508.2	-452.2	-480.6	659.9	1.10	1.09	1.09
4,609.0	10.40	229.70	4,550.5	-457.1	-486.6	667.6	0.59	0.23	-3.02
4,655.0	10.30	228.80	4,595.8	-462.5	-492.8	675.9	0.41	-0.22	-1.96
4,699.0	10.00	227.70	4,639.1	-467.7	-498.6	683.6	0.81	-0.68	-2.50
4,743.0	10.10	227.80	4,682.4	-472.8	-504.3	691.3	0.23	0.23	0.23
4,787.0	9.90	227.60	4,725.7	-478.0	-510.0	698.9	0.46	-0.45	-0.45
4,821.0	9.80	228.00	4,759.2	-481.9	-514.3	704.7	0.36	-0.29	1.18
4,874.0	10.10	228.70	4,811.4	-488.0	-521.1	713.9	0.61	0.57	1.32
4,918.0	10.00	228.20	4,854.8	-493.1	-526.9	721.6	0.30	-0.23	-1.14
4,962.0	10.00	227.30	4,898.1	-498.2	-532.5	729.2	0.36	0.00	-2.05
5,008.0	10.10	227.00	4,943.4	-503.7	-538.4	737.2	0.25	0.22	-0.65
5,054.0	9.90	226.40	4,988.7	-509.1	-544.2	745.2	0.49	-0.43	-1.30
5,097.0	9.80	225.70	5,031.1	-514.2	-549.5	752.6	0.36	-0.23	-1.63
5,143.0	9.60	226.80	5,076.4	-519.6	-555.1	760.3	0.59	-0.43	2.39
5,167.5	9.65	228.93	5,100.6	-522.3	-558.1	764.4	1.47	0.21	8.68
<b>Q-11-9-15 TGT</b>									
5,187.0	9.70	230.60	5,119.8	-524.5	-560.6	767.7	1.47	0.25	8.59
5,233.0	9.80	230.20	5,165.1	-529.4	-566.6	775.5	0.26	0.22	-0.87
5,297.0	10.20	230.60	5,228.1	-536.5	-575.2	786.6	0.63	0.63	0.63
5,324.0	10.10	231.90	5,254.7	-539.5	-578.9	791.3	0.93	-0.37	4.81



# Payzone Directional Survey Report



**Company:** NEWFIELD EXPLORATION  
**Project:** USGS Myton SW (UT)  
**Site:** SECTION 11 T 9S R15E  
**Well:** Q-11-9-15  
**Wellbore:** Wellbore #1  
**Design:** Actual

**Local Co-ordinate Reference:** Well Q-11-9-15  
**TVD Reference:** Q-11-9-15 @ 6175.0ft (NDSI SS #1)  
**MD Reference:** Q-11-9-15 @ 6175.0ft (NDSI SS #1)  
**North Reference:** True  
**Survey Calculation Method:** Minimum Curvature  
**Database:** EDM 2003.21 Single User Db

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/S (ft)	+E/W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,368.0	9.70	230.30	5,298.1	-544.2	-584.8	798.9	1.10	-0.91	-3.64
5,414.0	9.60	228.70	5,343.4	-549.2	-590.7	806.6	0.62	-0.22	-3.48
5,459.0	9.70	225.10	5,387.8	-554.4	-596.2	814.1	1.36	0.22	-8.00
5,505.0	9.70	225.80	5,433.1	-559.8	-601.7	821.8	0.26	0.00	1.52
5,551.0	9.90	225.70	5,478.5	-565.3	-607.3	829.7	0.44	0.43	-0.22
5,595.0	10.50	224.50	5,521.8	-570.8	-612.8	837.5	1.45	1.36	-2.73
5,641.0	11.30	224.80	5,566.9	-577.0	-618.9	846.2	1.74	1.74	0.65
5,686.0	11.60	227.30	5,611.0	-583.2	-625.4	855.1	1.29	0.67	5.56
5,730.0	11.80	229.20	5,654.1	-589.1	-632.0	864.0	0.99	0.45	4.32
5,776.0	11.80	231.90	5,699.1	-595.1	-639.3	873.4	1.20	0.00	5.87
5,820.0	11.80	234.70	5,742.2	-600.5	-646.5	882.3	1.30	0.00	6.36
5,864.0	11.90	235.40	5,785.3	-605.6	-653.9	891.3	0.40	0.23	1.59
5,910.0	12.00	235.30	5,830.3	-611.1	-661.7	900.7	0.22	0.22	-0.22
5,956.0	11.80	234.70	5,875.3	-616.5	-669.5	910.1	0.51	-0.43	-1.30
6,002.0	11.70	235.20	5,920.3	-621.9	-677.2	919.4	0.31	-0.22	1.09
6,047.0	11.80	235.20	5,964.4	-627.1	-684.7	928.4	0.22	0.22	0.00
6,093.0	11.60	235.00	6,009.4	-632.4	-692.3	937.7	0.44	-0.43	-0.43
6,139.0	11.30	234.20	6,054.5	-637.7	-699.8	946.7	0.74	-0.65	-1.74
6,185.0	10.90	234.30	6,099.7	-642.9	-707.0	955.5	0.87	-0.87	0.22
6,231.0	10.50	234.10	6,144.9	-647.9	-713.9	964.0	0.87	-0.87	-0.43
6,276.0	10.00	234.40	6,189.1	-652.6	-720.4	971.9	1.12	-1.11	0.67
6,322.0	9.70	235.20	6,234.5	-657.1	-726.8	979.7	0.72	-0.65	1.74
6,350.0	9.40	235.90	6,262.1	-659.7	-730.7	984.3	1.15	-1.07	2.50
6,402.0	9.40	235.90	6,313.4	-664.5	-737.7	992.7	0.00	0.00	0.00

Checked By: \_\_\_\_\_ Approved By: \_\_\_\_\_ Date: \_\_\_\_\_








Project: USGS Myton SW (UT)  
 Site: SECTION 11 T 9S R15E  
 Well: Q-11-9-15  
 Wellbore: Wellbore #1  
 Design: Actual



Azimuths to True North  
 Magnetic North: 11.35°

Magnetic Field  
 Strength: 52229.2snT  
 Dip Angle: 65.76°  
 Date: 8/11/2011  
 Model: IGRF2010

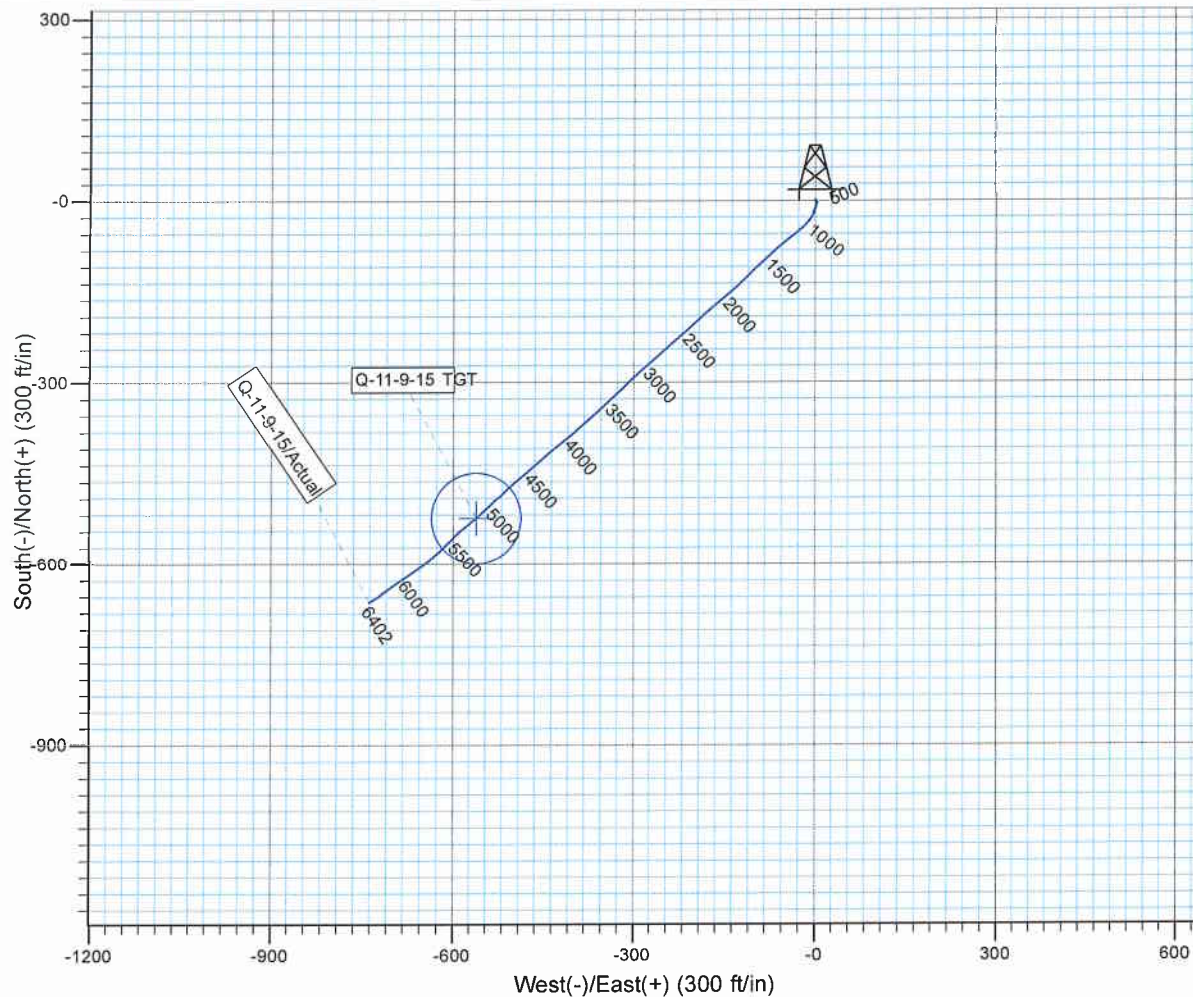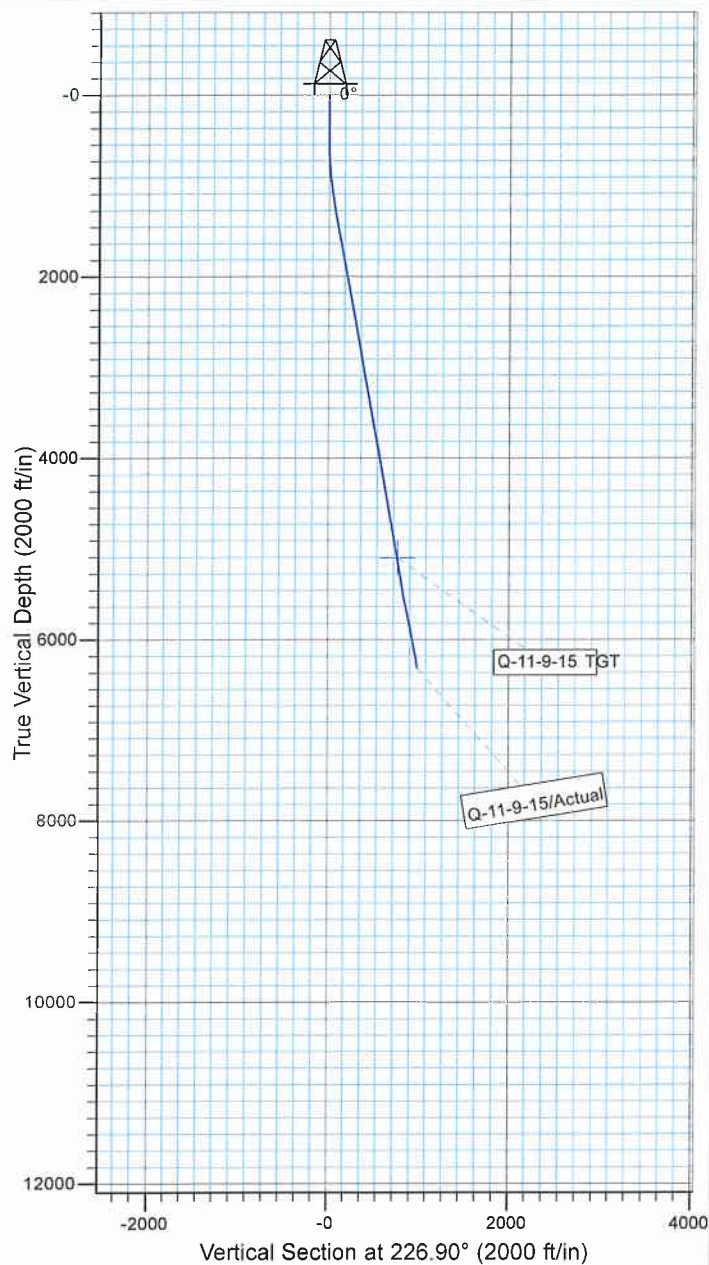

Design: Actual (Q-11-9-15/Wellbore #1)

Created By: Sarah Webb Date: 12:14, October 10 2012

THIS SURVEY IS CORRECT TO THE BEST OF  
 MY KNOWLEDGE AND IS SUPPORTED  
 BY ACTUAL FIELD DATA