


STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS AND MINING						FORM 3 AMENDED REPORT <input type="checkbox"/>							
APPLICATION FOR PERMIT TO DRILL						1. WELL NAME and NUMBER 5-7D-45 BTR							
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>						3. FIELD OR WILDCAT ALTAMONT							
4. TYPE OF WELL Oil Well Coalbed Methane Well: NO						5. UNIT or COMMUNITIZATION AGREEMENT NAME							
6. NAME OF OPERATOR BILL BARRETT CORP						7. OPERATOR PHONE 303 312-8164							
8. ADDRESS OF OPERATOR 1099 18th Street Ste 2300, Denver, CO, 80202						9. OPERATOR E-MAIL BHilgers@billbarrettcorp.com							
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) 2OG0005608			11. MINERAL OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input checked="" type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>			12. SURFACE OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input checked="" type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>							
13. NAME OF SURFACE OWNER (if box 12 = 'fee')						14. SURFACE OWNER PHONE (if box 12 = 'fee')							
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')						16. SURFACE OWNER E-MAIL (if box 12 = 'fee')							
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN') Uintah and Ouray			18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>			19. SLANT VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>							
20. LOCATION OF WELL		FOOTAGES		QTR-QTR		SECTION		TOWNSHIP		RANGE		MERIDIAN	
LOCATION AT SURFACE		2321 FNL 899 FWL		SWNW		7		4.0 S		5.0 W		U	
Top of Uppermost Producing Zone		1980 FNL 811 FWL		SWNW		7		4.0 S		5.0 W		U	
At Total Depth		1980 FNL 810 FWL		SWNW		7		4.0 S		5.0 W		U	
21. COUNTY DUCHESNE			22. DISTANCE TO NEAREST LEASE LINE (Feet) 810			23. NUMBER OF ACRES IN DRILLING UNIT 640							
			25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 2981			26. PROPOSED DEPTH MD: 8210 TVD: 8186							
27. ELEVATION - GROUND LEVEL 6142			28. BOND NUMBER LPM8874725			29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 43-180							
Hole, Casing, and Cement Information													
String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement		Sacks	Yield	Weight		
Cond	26	16	0 - 80	65.0	Unknown	8.8	Unknown		0	0.0	0.0		
Surf	12.25	9.625	0 - 2100	36.0	J-55 ST&C	8.8	Halliburton Light , Type Unknown		290	3.16	11.0		
							Halliburton Premium , Type Unknown		210	1.36	14.8		
Prod	8.75	5.5	0 - 8210	17.0	P-110 LT&C	9.6	Unknown		670	2.31	11.0		
							Unknown		700	1.42	13.5		
ATTACHMENTS													
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES													
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER						<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN							
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)						<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER							
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)						<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP							
NAME Venessa Langmacher				TITLE Senior Permit Analyst				PHONE 303 312-8172					
SIGNATURE				DATE 04/04/2012				EMAIL vlangmacher@billbarrettcorp.com					
API NUMBER ASSIGNED 43013513500000				APPROVAL  Permit Manager									

BILL BARRETT CORPORATION
DRILLING PLAN

1/04/2011

5-7D-45 BTR Well Pad

Lot 2 (SW NW), 2321' FNL and 899' FWL, Section 7, T4S-R5W, USB&M (surface hole)

Lot 2 (SW NW), 1980' FNL and 810' FWL, Section 7, T4S-R5W, USB&M (bottom hole)

Duchesne County, Utah

1 - 2. Estimated Tops of Geological Markers and Formations Expected to Contain Water, Oil and Gas and Other Minerals

<u>Formation</u>	<u>Depth – MD</u>	<u>Depth - TVD</u>
Lower Green River*	4,419'	4,406'
Douglas Creek	5,289'	5,266'
Black Shale	6,130'	6,106'
Castle Peak	6,395'	6,371'
Uteland Butte	6,698'	6,671'
Wasatch*	6,925'	6,901'
TD	8,210'	8,186'

*PROSPECTIVE PAY

The Wasatch and the Lower Green River are primary objectives for oil/gas.

Base of Useable Water = 651'

3. BOP and Pressure Containment Data

<u>Depth Intervals</u>	<u>BOP Equipment</u>
0 – 2,100'	No pressure control required
2,100' – TD	11" 5000# Ram Type BOP 11" 5000# Annular BOP
- Drilling spool to accommodate choke and kill lines;	
- Ancillary equipment and choke manifold rated at 5,000 psi. All BOP and BOPE tests will be in accordance with the requirements of onshore Order No. 2;	
- The BLM and the State of Utah Division of Oil, Gas and Mining will be notified 24 hours in advance of all BOP pressure tests.	
- BOP hand wheels may be underneath the sub-structure of the rig if the drilling rig used is set up To operate most efficiently in this manner.	

4. Casing Program

<u>Hole Size</u>	<u>SETTING DEPTH</u>		<u>Casing Size</u>	<u>Casing Weight</u>	<u>Casing Grade</u>	<u>Thread</u>	<u>Condition</u>
	<u>(FROM)</u>	<u>(TO)</u>					
26"	Surface	80'	16"	65#			
12 1/4"	Surface	2,100'	9 5/8"	36#	J or K 55	ST&C	New
8 3/4"	Surface	TD	5 1/2"	17#	P-110	LT&C	New

Bill Barrett Corporation
Drilling Program
5-7D-45 BTR
Duchesne County, Utah

5. Cementing Program

16" Conductor Casing	Grout
9 5/8" Surface Casing	Lead: 290 sx Halliburton Light Premium with additives mixed at 11.0 ppg (yield = 3.16 ft ³ /sx) circulated to surface with 75% excess. TOC @ Surface Tail: 210 sx Halliburton Premium Plus cement with additives mixed at 14.8 ppg (yield = 1.36 ft ³ /sx), calculated hole volume with 75% excess. TOC @ 1,600'
5 1/2" Production Casing	Lead: 670 sx Tuned Light cement with additives mixed at 11.0 ppg (yield = 2.31 ft ³ /sx). TOC @ 1,600' Tail: 700 sx Halliburton Econocem cement with additives mixed at 13.5 ppg (yield = 1.42 ft ³ /sx). Top of cement to be determined by log and sample evaluation; estimated TOC @ 5,630'

6. Mud Program

<u>Interval</u>	<u>Weight</u>	<u>Viscosity</u>	<u>Fluid Loss</u> <u>(API filtrate)</u>	<u>Remarks</u>
0' – 80'	8.3 – 8.8	26 – 36	NC	Freshwater Spud Mud Fluid System
80' – 2,100'	8.3 – 8.8	26 – 36	NC	Freshwater Spud Mud Fluid System
2,100' – TD	8.6 – 9.6	42-52	20 cc or less	DAP Polymer Fluid System
Note: Sufficient mud materials to maintain mud properties, control lost circulation and to contain "kicks" will be available at wellsite. BBC may require minor amounts of diesel to be added to its fluid system in order to reduce torque and drag.				

7. Testing, Logging and Core Programs

Cores	None anticipated;
Testing	None anticipated; drill stem tests may be run on shows of interest;
Sampling	30' to 50' samples; surface casing to TD. Preserve samples all show intervals;
Surveys	MWD as needed to land wellbore;
Logging	DIL-GR-SP, FDC-CNL-GR-CALIPER-Pe-Microlog, Sonic-GR (all TD to surface). FMI & Sonic Scanner to be run at geologist's discretion.

8. Anticipated Abnormal Pressures or Temperatures

No abnormal pressures or temperatures or other hazards are anticipated.

Maximum anticipated bottom hole pressure equals approximately 4086 psi* and maximum anticipated surface pressure equals approximately 2285 psi** (bottom hole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

*Max Mud Wt x 0.052 x TD = A (bottom hole pressure)

**Maximum surface pressure = A – (0.22 x TD)

Bill Barrett Corporation
Drilling Program
5-7D-45 BTR
Duchesne County, Utah

9. Auxiliary Equipment

- a) Upper kelly cock; lower Kelly cock will be installed while drilling
 - b) Inside BOP or stab-in valve (available on rig floor)
 - c) Safety valve(s) and subs to fit all string connections in use
- Mud monitoring will be visually observed

10. Location and Type of Water Supply

Water for the drilling and completion will be trucked from the Duchesne City Culinary Water Dock located in Sec. 1, T4S, R5W water right number 43-180.

11. Drilling Schedule

Location Construction: January 2013
Spud: January 2013
Duration: 15 days drilling time
45 days completion time



Bill Barrett Corporation

LAKE CANYON & BLACK TAIL RIDGE CEMENT VOLUMES

Well Name: 5-7D-45 BTR

Surface Hole Data:

Total Depth:	2,100'
Top of Cement:	0'
OD of Hole:	12.250"
OD of Casing:	9.625"

Calculated Data:

Lead Volume:	876.9	ft ³
Lead Fill:	1,600'	
Tail Volume:	274.0	ft ³
Tail Fill:	500'	

Cement Data:

Lead Yield:	3.16	ft ³ /sk
% Excess:	75%	
Top of Lead:	0'	

Calculated # of Sacks:

# SK's Lead:	290
--------------	-----

Tail Yield:	1.36	ft ³ /sk
% Excess:	75%	
Top of Tail:	1,600'	

# SK's Tail:	210
--------------	-----

Production Hole Data:

Total Depth:	8,210'
Top of Cement:	1,600'
Top of Tail:	5,630'
OD of Hole:	8.750"
OD of Casing:	5.500"

Calculated Data:

Lead Volume:	1526.9	ft ³
Lead Fill:	4,030'	
Tail Volume:	977.6	ft ³
Tail Fill:	2,580'	

Cement Data:

Lead Yield:	2.31	ft ³ /sk
Tail Yield:	1.42	ft ³ /sk
% Excess:	50%	

Calculated # of Sacks:

# SK's Lead:	670
# SK's Tail:	700

5-7D-45 BTR Proposed Cementing Program

<u>Job Recommendation</u>	<u>Surface Casing</u>
Lead Cement - (1600' - 0')	
Halliburton Light Premium	Fluid Weight: 11.0 lbm/gal
5.0 lbm/sk Silicalite Compacted	Slurry Yield: 3.16 ft ³ /sk
0.25 lbm/sk Kwik Seal	Total Mixing Fluid: 19.48 Gal/sk
0.125 lbm/sk Poly-E-Flake	Top of Fluid: 0'
2.0% Bentonite	Calculated Fill: 1,600'
	Volume: 156.17 bbl
	Proposed Sacks: 290 sks
Tail Cement - (TD - 1600')	
Premium Cement	Fluid Weight: 14.8 lbm/gal
2.0% Calcium Chloride	Slurry Yield: 1.36 ft ³ /sk
	Total Mixing Fluid: 6.37 Gal/sk
	Top of Fluid: 1,600'
	Calculated Fill: 500'
	Volume: 48.80 bbl
	Proposed Sacks: 210 sks

<u>Job Recommendation</u>	<u>Production Casing</u>
Lead Cement - (5630' - 1600')	
Tuned Light TM System	Fluid Weight: 11.0 lbm/gal
	Slurry Yield: 2.31 ft ³ /sk
	Total Mixing Fluid: 10.65 Gal/sk
	Top of Fluid: 1,600'
	Calculated Fill: 4,030'
	Volume: 271.94 bbl
	Proposed Sacks: 670 sks
Tail Cement - (8210' - 5630')	
Econocem TM System	Fluid Weight: 13.5 lbm/gal
0.125 lbm/sk Poly-E-Flake	Slurry Yield: 1.42 ft ³ /sk
1.0 lbm/sk Granulite TR 1/4	Total Mixing Fluid: 6.61 Gal/sk
	Top of Fluid: 5,630'
	Calculated Fill: 2,580'
	Volume: 174.11 bbl
	Proposed Sacks: 700 sks

T4S, R5W, U.S.B.&M.

BILL BARRETT CORPORATION

Well location, #5-7D-45 BTR, located as shown in Lot 2 of Section 7, T4S, R5W, U.S.B.&M., Duchesne County, Utah.

BASIS OF ELEVATION

BENCH MARK (M67) LOCATED IN THE SW 1/4 OF SECTION 9, T5S, R4W, U.S.B.&M., TAKEN FROM THE DUCHESNE SE, QUADRANGLE, UTAH, DUCHESNE COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 6097 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.



SCALE
CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE POINT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY CLOSE SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.


Robert L. Kax
REGISTERED LAND SURVEYOR
REGISTRATION NO. 161319
STATE OF UTAH
02-15-12

REVISED: 02-15-12

UINTAH ENGINEERING & LAND SURVEYING

85 SOUTH 200 EAST - VERNAL, UTAH 84078
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 11-11-10	DATE DRAWN: 11-30-10
PARTY D.R. J.T. S.B.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE	BILL BARRETT CORPORATION

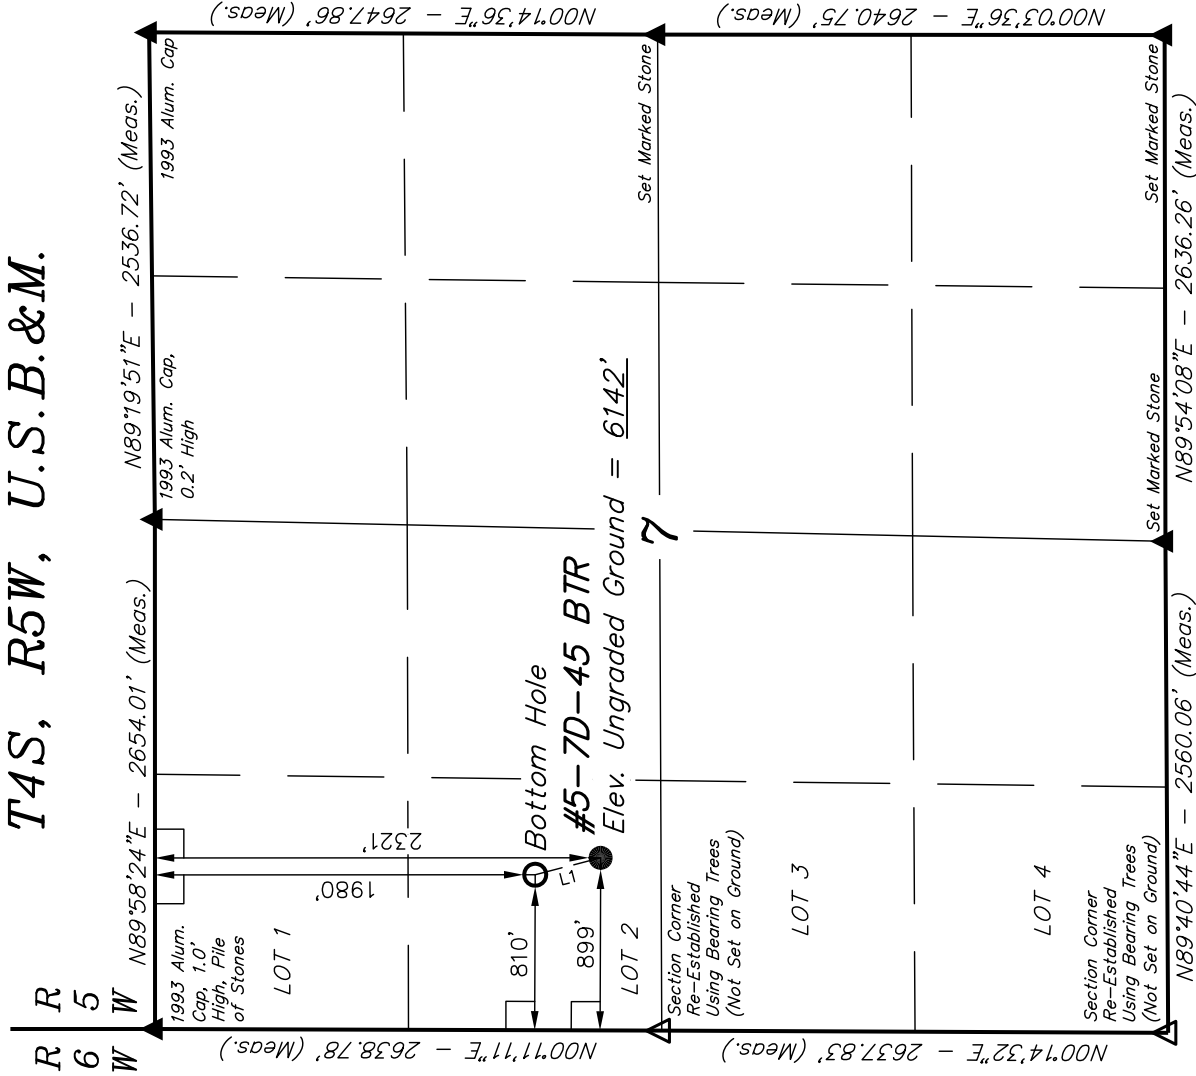

LEGEND:

— = 90° SYMBOL

● = PROPOSED WELL HEAD.

▲ = SECTION CORNERS LOCATED.

△ = SECTION CORNERS


RE-ESTABLISHED.

(Not Set on Ground.)

LINE TABLE		
LINE	DIRECTION	LENGTH
L1	N14°29'07"W	351.95'

NAD 83 (TARGET BOTTOM HOLE)		
LATITUDE = 40°08'57.23"	(40.149231)	
LONGITUDE = 110°29'57.32"	(110.499256)	
NAD 27 (TARGET BOTTOM HOLE)		
LATITUDE = 40°08'57.38"	(40.149272)	
LONGITUDE = 110°29'54.76"	(110.498544)	

NAD 83 (SURFACE LOCATION)		
LATITUDE = 40°08'53.86"	(40.148294)	
LONGITUDE = 110°29'56.18"	(110.498939)	
NAD 27 (SURFACE LOCATION)		
LATITUDE = 40°08'54.01"	(40.148336)	
LONGITUDE = 110°29'53.62"	(110.498228)	

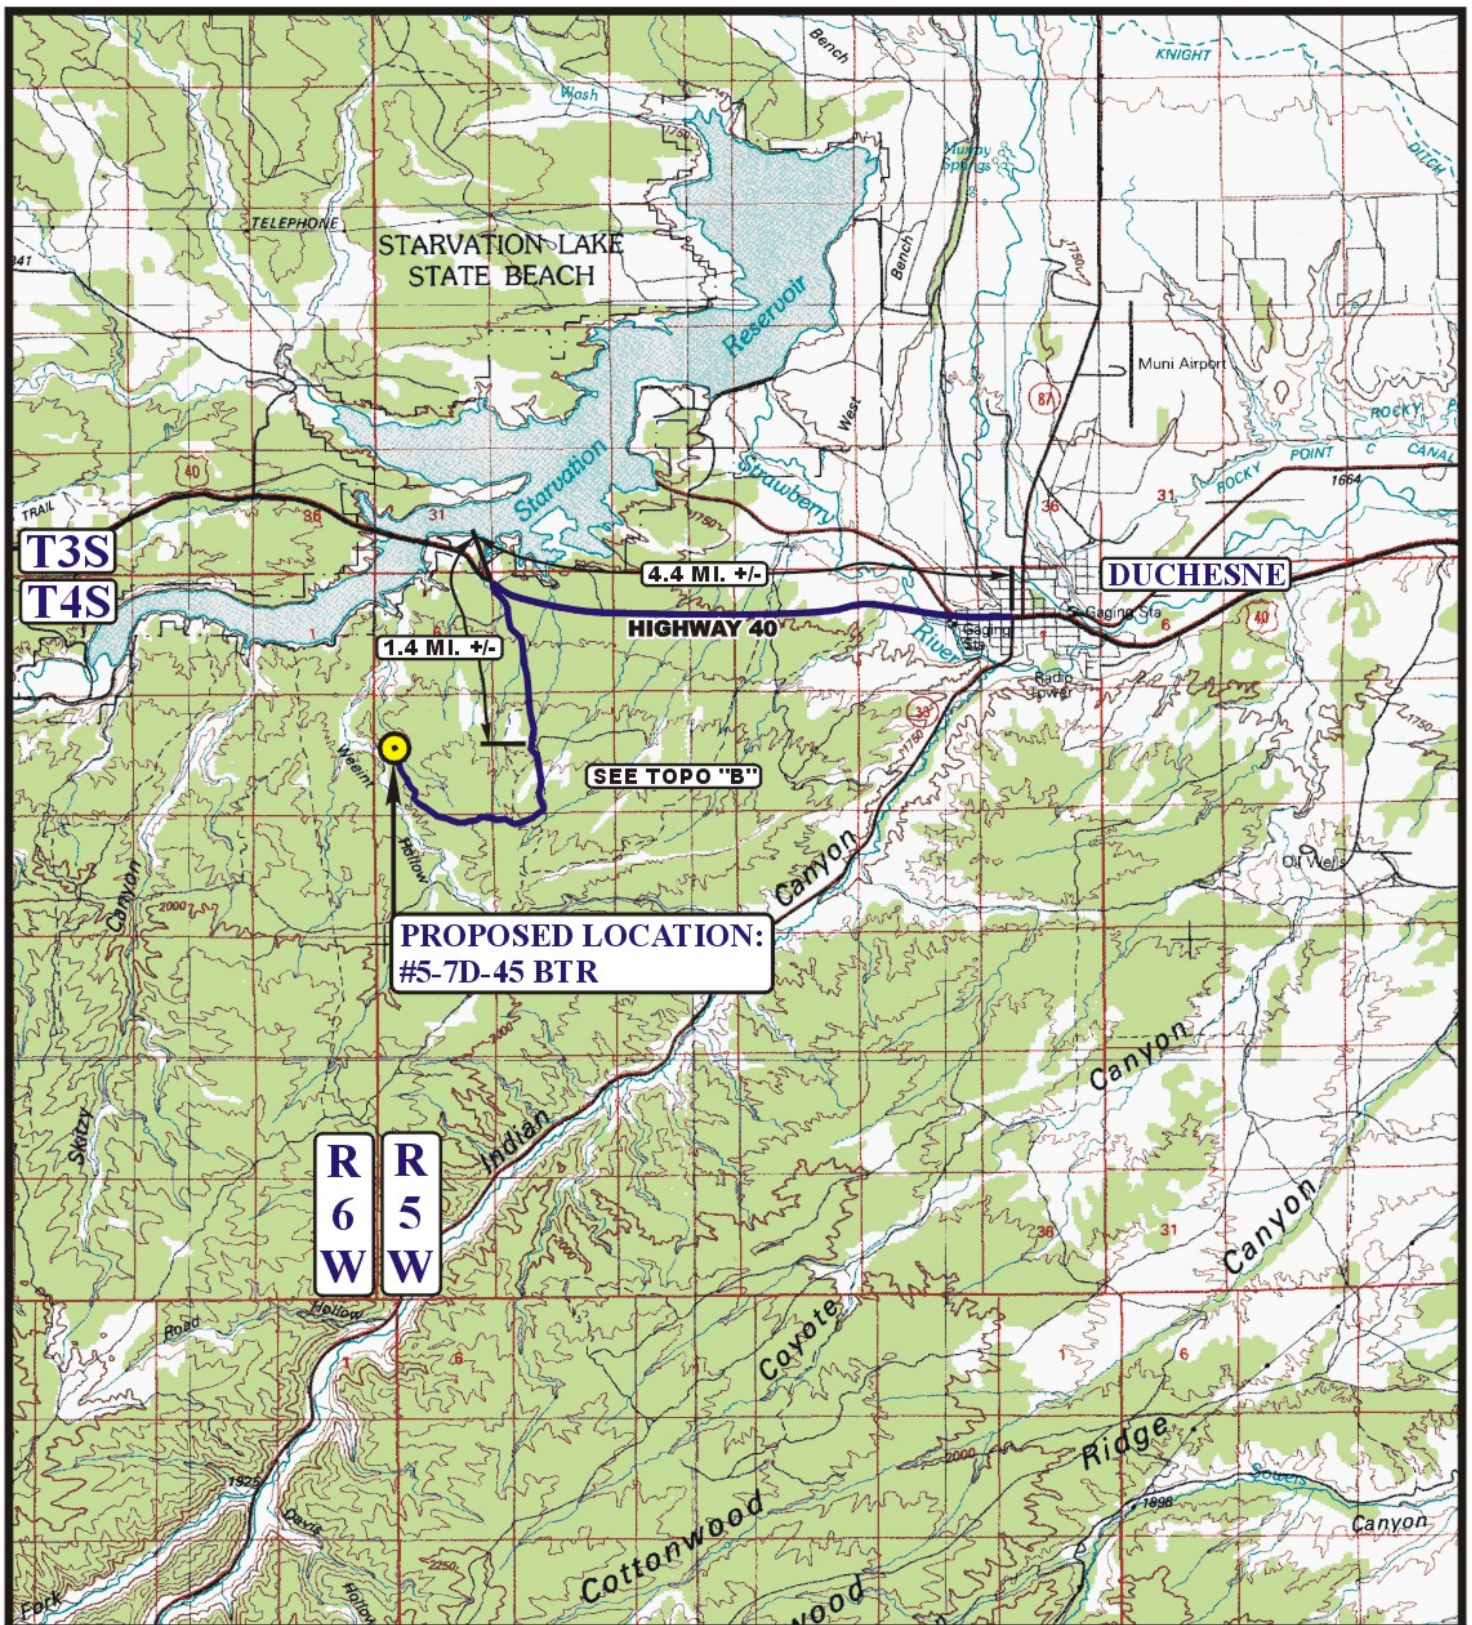

LEGEND:

PROPOSED LOCATION



BILL BARRETT CORPORATION

#5-7D-45 BTR

**SECTION 7, T4S, R5W, U.S.B.&M.
2321' FNL 899' FWL**



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**ACCESS ROAD
MAP**


12 10 10
MONTH DAY YEAR


SCALE: 1:100,000

DRAWN BY: J.J.

REVISED: 00-00-00



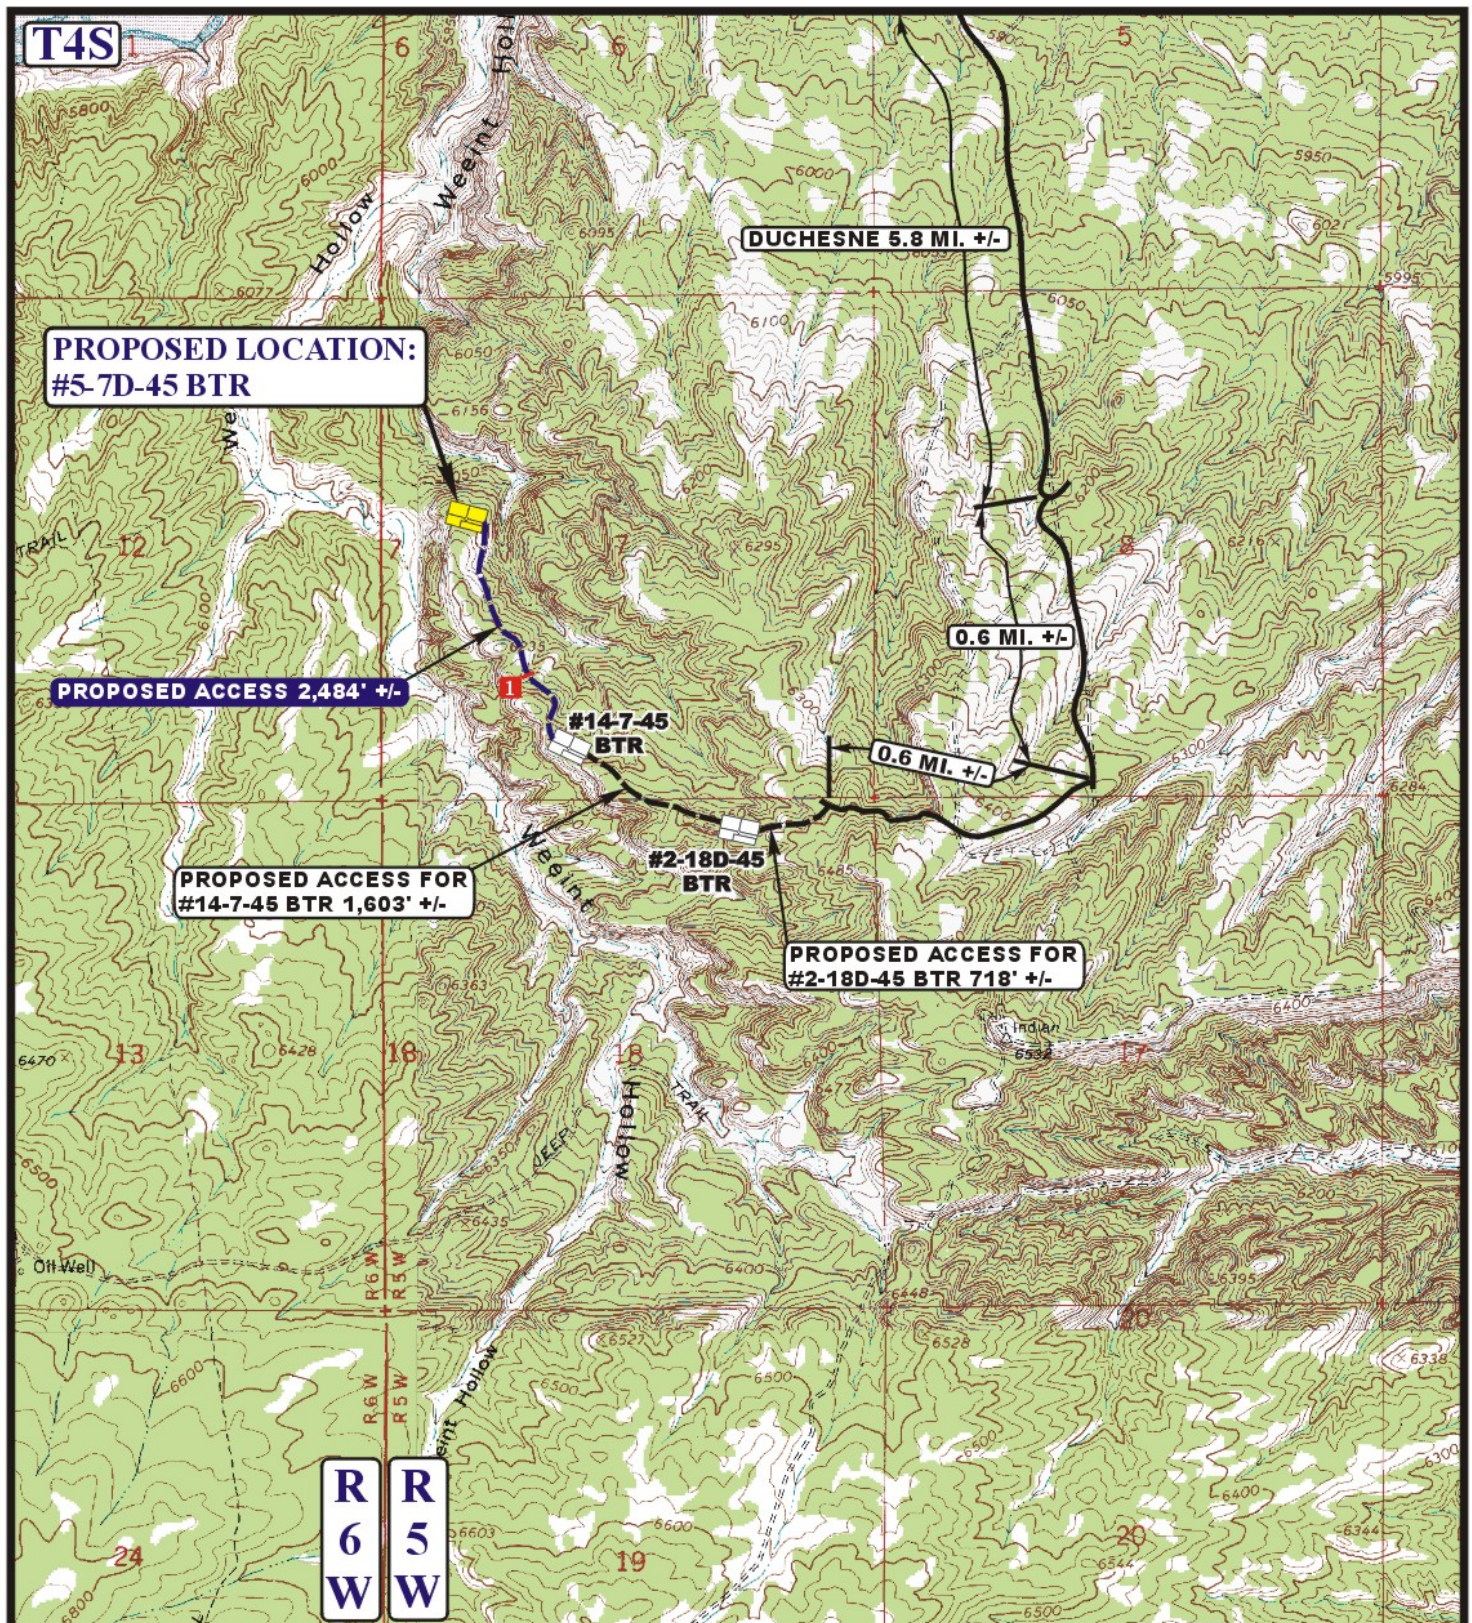

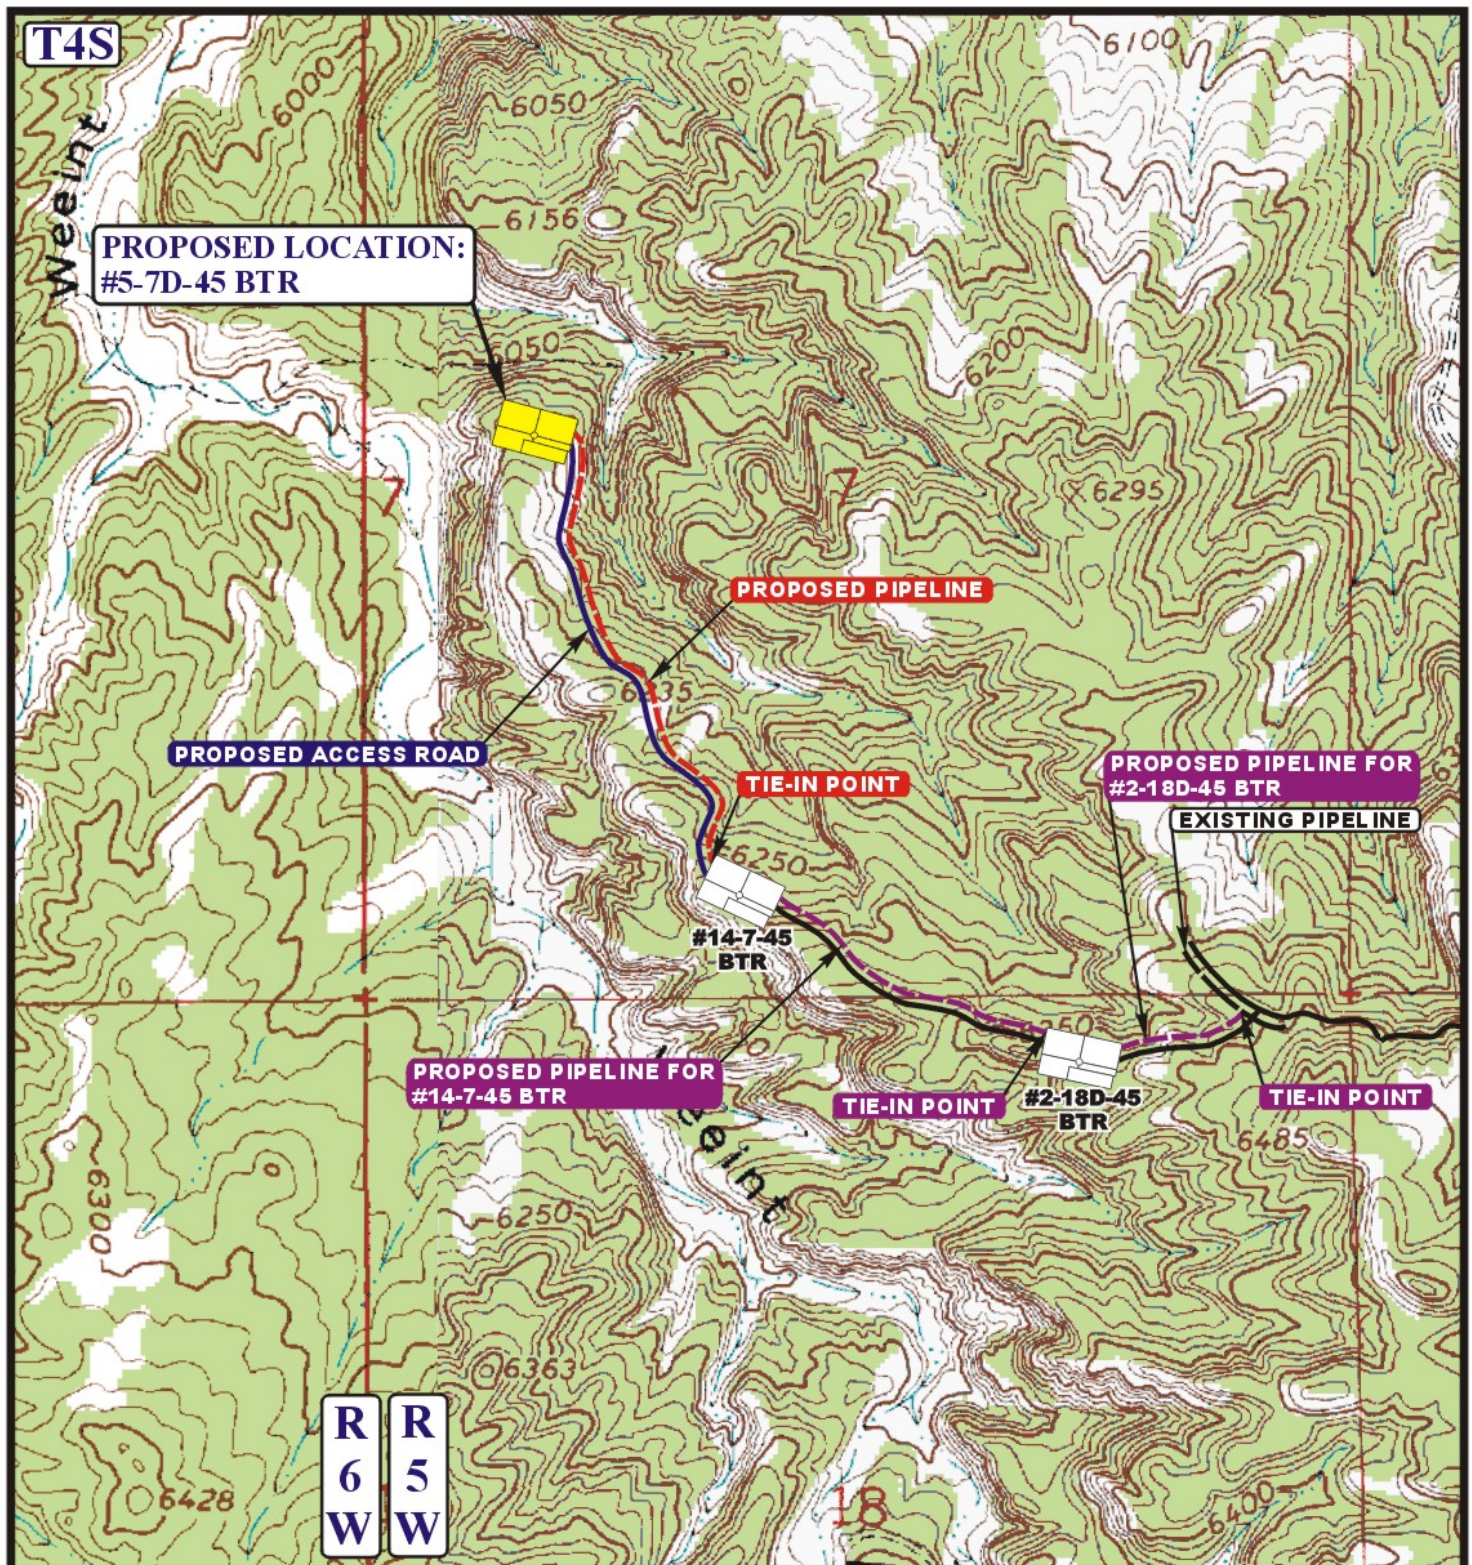

APPROXIMATE TOTAL PIPELINE DISTANCE = 2,512' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- PROPOSED PIPELINE
- PROPOSED PIPELINE (SERVICING OTHER WELLS)



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



BILL BARRETT CORPORATION


#5-7D-45 BTR
SECTION 7, T4S, R5W, U.S.B.&M.
2321' FNL 899' FWL

**TOPOGRAPHIC
MAP**

12 10 10
 MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: J.J. REVISED: 00-00-00



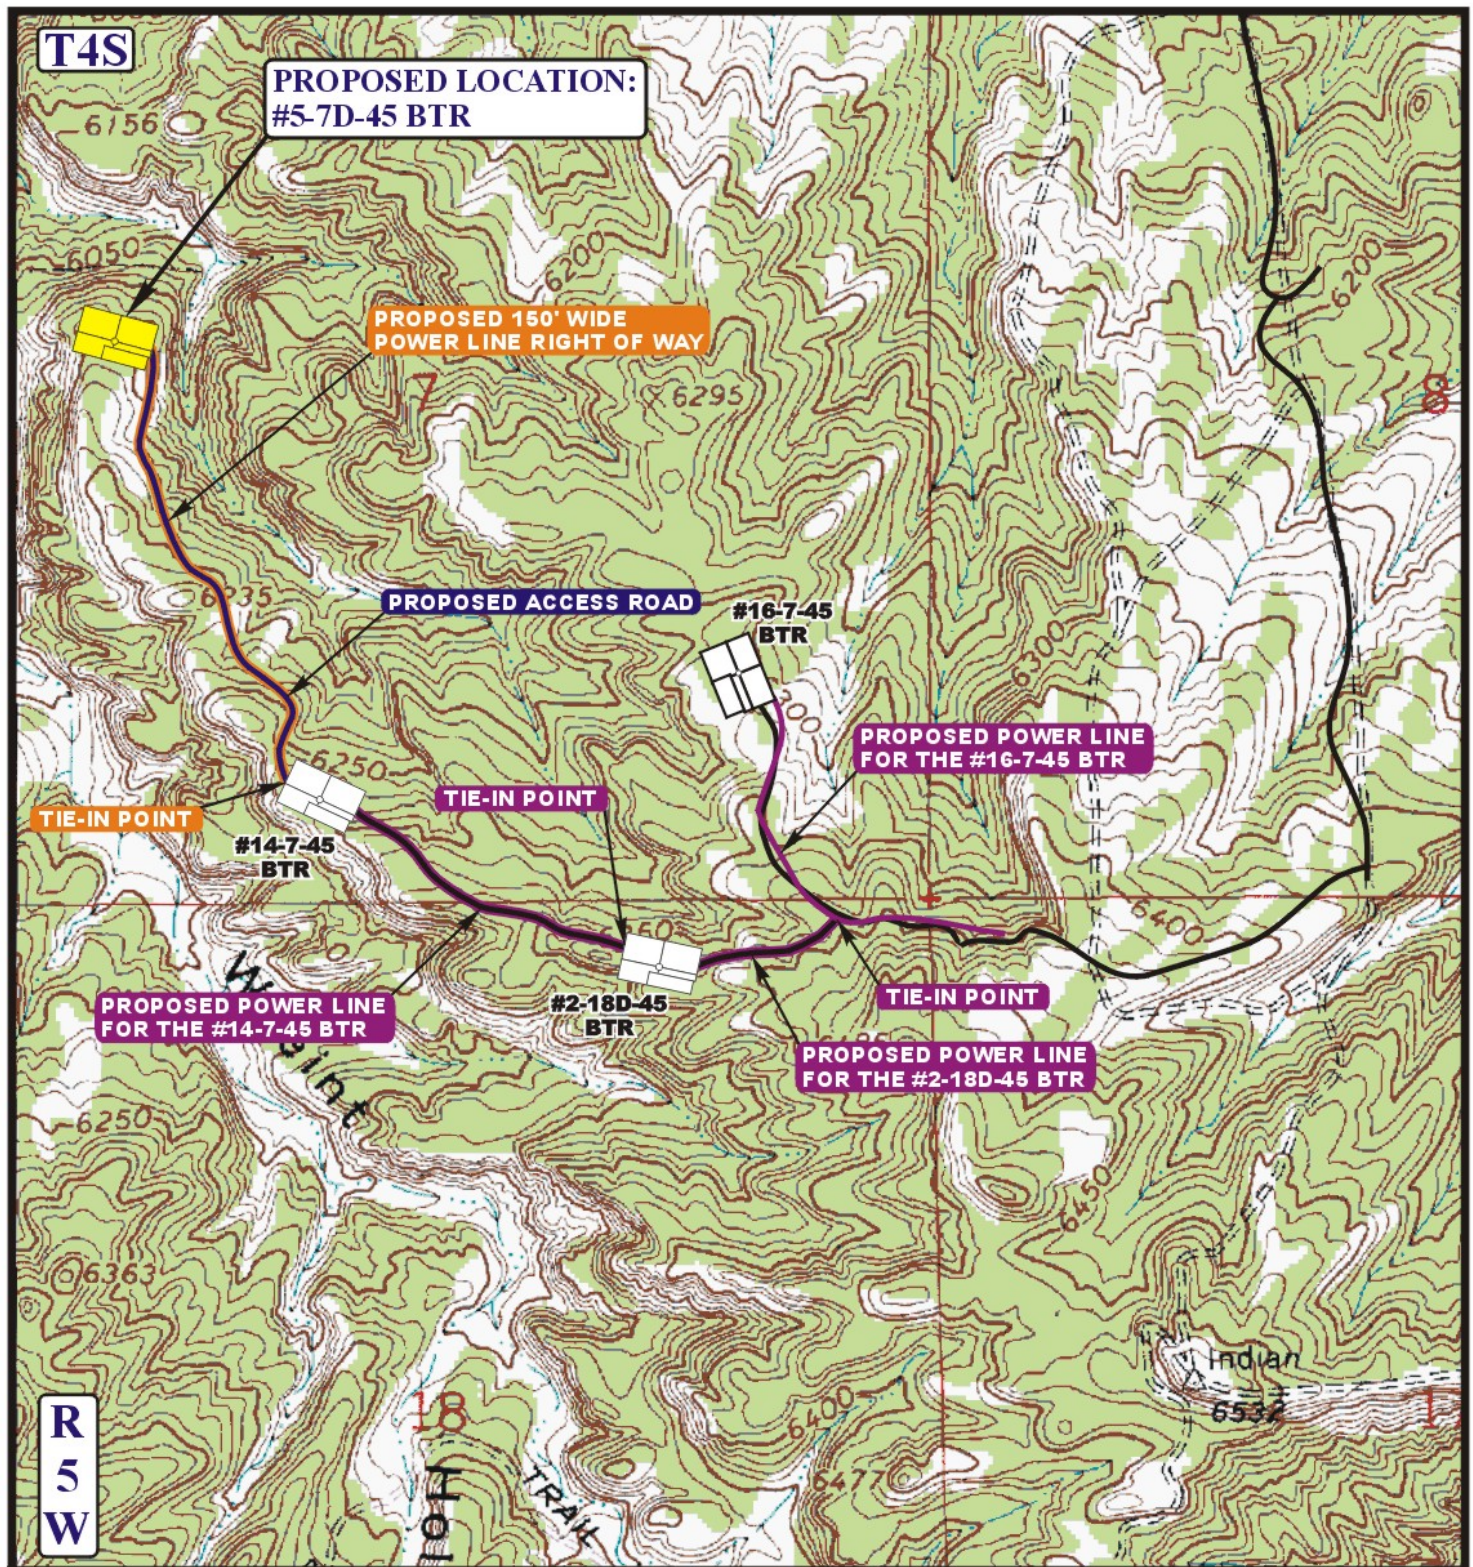

APPROXIMATE TOTAL POWER LINE DISTANCE = 2,484' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING POWER LINE
- PROPOSED POWER LINE
- PROPOSED POWER LINE (SERVICING OTHER WELLS)



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813



BILL BARRETT CORPORATION

#5-7D-45 BTR
SECTION 7, T4S, R5W, U.S.B.&M.
2321' FNL 899' FWL

**TOPOGRAPHIC
MAP**

12 10 10
MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: J.J. REVISED: 00-00-00

**D
TOPO**



Bill Barrett Corporation

SITE DETAILS: 5-7D-45 BTR
Blacktail Ridge

 Site Latitude: 40° 8' 54.010 N
 Site Longitude: 110° 29' 53.621 W
COMPANY DETAILS: BILL BARRETT CORP
 Calculation Method: Minimum Curvature
 Error System: ISCWSA
 Scan Method: Closest Approach 3D
 Error Surface: Elliptical Conic
 Warning Method: Error Ratio

 Positional Uncertainty: 0.0
 Convergence: 0.64
 Local North: True
WELL DETAILS: 5-7D-45 BTR

Ground Level: 6142.0

+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot
0.0	0.0	662644.94	2280028.59	40° 8' 54.010 N	110° 29' 53.621 W	

WELLBORE TARGET DETAILS (LAT/LONG)

Name	TVD	+N/-S	+E/-W	Latitude	Longitude	Shape
5-7D 3PT MKR	5706.0	341.0	-88.3	40° 8' 57.379 N	110° 29' 54.758 W	Rectangle (Sides: L200.0 W200.0)
5-7D PBHL	8186.0	341.0	-88.3	40° 8' 57.379 N	110° 29' 54.758 W	Rectangle (Sides: L200.0 W200.0)

SECTION DETAILS



Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	2800.0	0.00	0.00	2800.0	0.0	0.0	0.00	0.00	0.0	
3	3372.5	8.59	345.48	3370.3	41.4	-10.7	1.50	345.48	42.8	
4	5157.8	8.59	345.48	5135.7	299.5	-77.6	0.00	0.00	309.4	
5	5730.3	0.00	0.00	5706.0	341.0	-88.3	1.50	180.00	352.2	5-7D 3PT MKR
6	8210.3	0.00	0.00	8186.0	341.0	-88.3	0.00	0.00	352.2	5-7D PBHL

FORMATION TOP DETAILS

TVDPath	MDPath	Formation
2386.0	2386.0	GREEN_RIVER
3196.0	3196.7	MAHOGANY
4406.0	4419.9	TGR3
5266.0	5289.3	DOUGLAS_CRK
5706.0	5730.3	3PT_MKR
6106.0	6130.3	BLACK_SHALE_FACIES
6371.0	6395.3	CASTLE_PEAK
6671.0	6695.3	UTELAND_BUTTE
6701.0	6725.3	CR_1
6741.0	6765.3	CR 1A BASE
6901.0	6925.3	WASATCH
7021.0	7045.3	CR_2
7291.0	7315.3	CR_3
7611.0	7635.3	CR_4
7886.0	7910.3	CR_4A
7986.0	8010.3	CR_5
8156.0	8180.3	CR_6

CASING DETAILS

No casing data is available

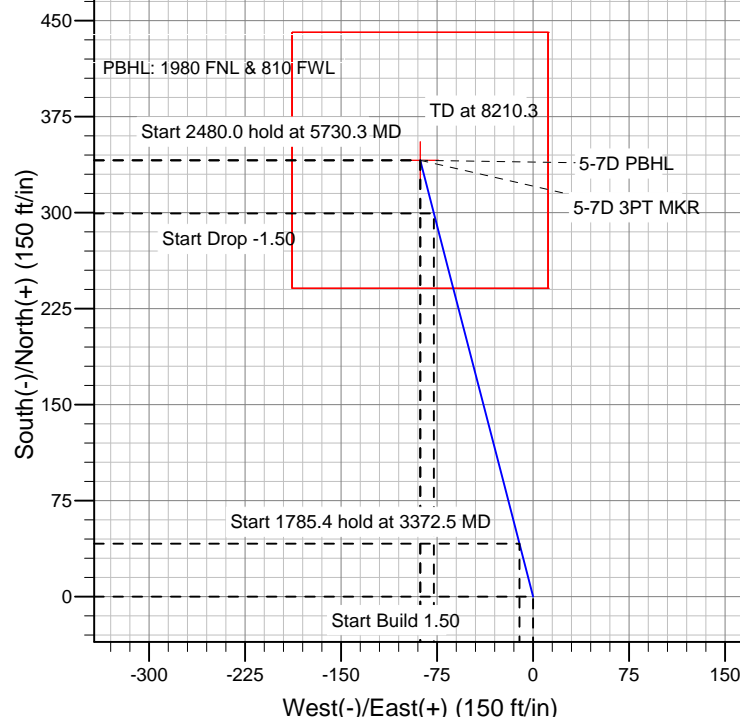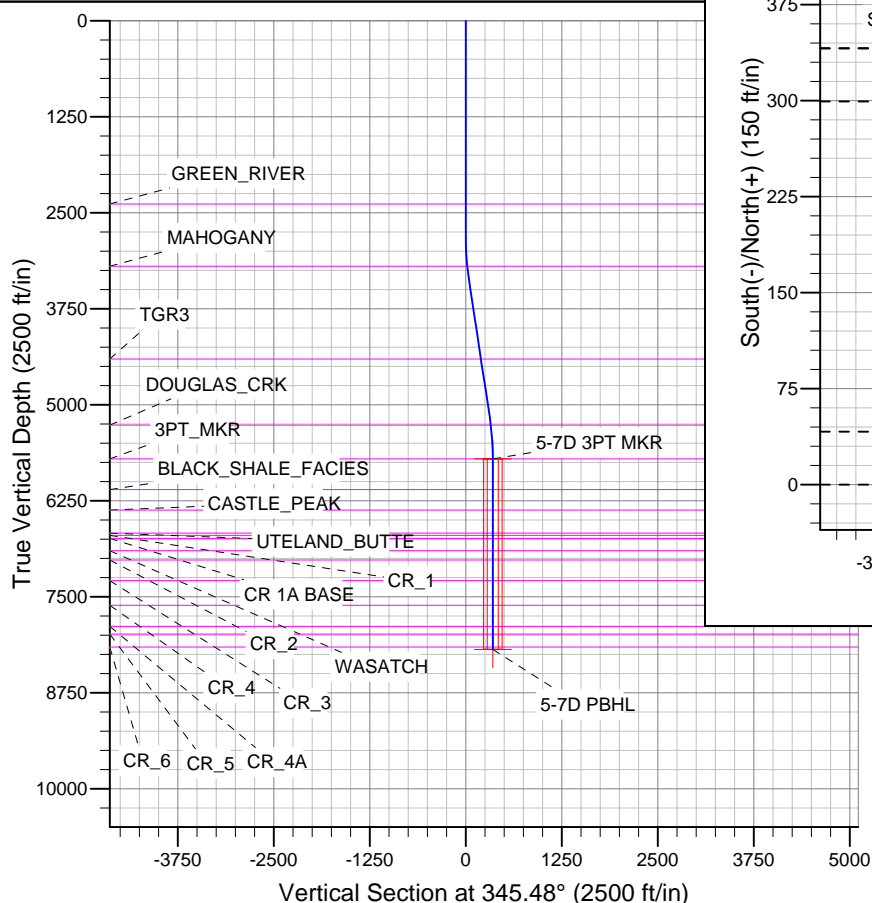
 Azimuths to True North
 Magnetic North: 11.44°

 Magnetic Field
 Strength: 52207.8snT
 Dip Angle: 65.78°
 Date: 12/19/2011
 Model: IGRF2010

BILL BARRETT CORP

DUCHESNE COUNTY, UT (NAD 27)

5-7D-45 BTR

5-7D-45 BTR

5-7D-45 BTR

Plan: Design #1

Standard Planning Report

23 March, 2012

Bill Barrett Corp

Planning Report

Database:	Compass	Local Co-ordinate Reference:	Well 5-7D-45 BTR
Company:	BILL BARRETT CORP	TVD Reference:	KB @ 6158.0ft (Original Well Elev)
Project:	DUCHESNE COUNTY, UT (NAD 27)	MD Reference:	KB @ 6158.0ft (Original Well Elev)
Site:	5-7D-45 BTR	North Reference:	True
Well:	5-7D-45 BTR	Survey Calculation Method:	Minimum Curvature
Wellbore:	5-7D-45 BTR		
Design:	Design #1		

Project	DUCHESNE COUNTY, UT (NAD 27)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Ground Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	Utah Central 4302		

Site		5-7D-45 BTR			
Site Position:		Northing:	662,644.94 ft	Latitude:	40° 8' 54.010 N
From:	Lat/Long	Easting:	2,280,028.59 ft	Longitude:	110° 29' 53.621 W
Position Uncertainty:	0.0 ft	Slot Radius:	"	Grid Convergence:	0.64 °

Well	5-7D-45 BTR					
Well Position	+N/-S	0.0 ft	Northing:	662,644.94 ft	Latitude:	40° 8' 54.010 N
	+E/-W	0.0 ft	Easting:	2,280,028.59 ft	Longitude:	110° 29' 53.621 W
Position Uncertainty		0.0 ft	Wellhead Elevation:	ft	Ground Level:	6,142.0 ft

Wellbore	5-7D-45 BTR				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	12/19/2011	11.44	65.78	52,208

Design	Design #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction
	(ft)	(ft)	(ft)	(°)
	0.0	0.0	0.0	345.48

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,800.0	0.00	0.00	2,800.0	0.0	0.0	0.00	0.00	0.00	0.00	
3,372.5	8.59	345.48	3,370.3	41.4	-10.7	1.50	1.50	0.00	345.48	
5,157.8	8.59	345.48	5,135.7	299.5	-77.6	0.00	0.00	0.00	0.00	
5,730.3	0.00	0.00	5,706.0	341.0	-88.3	1.50	-1.50	0.00	180.00	5-7D 3PT MKR
8,210.3	0.00	0.00	8,186.0	341.0	-88.3	0.00	0.00	0.00	0.00	5-7D PBHL

Bill Barrett Corp

Planning Report

Database:	Compass	Local Co-ordinate Reference:	Well 5-7D-45 BTR
Company:	BILL BARRETT CORP	TVD Reference:	KB @ 6158.0ft (Original Well Elev)
Project:	DUCHESNE COUNTY, UT (NAD 27)	MD Reference:	KB @ 6158.0ft (Original Well Elev)
Site:	5-7D-45 BTR	North Reference:	True
Well:	5-7D-45 BTR	Survey Calculation Method:	Minimum Curvature
Wellbore:	5-7D-45 BTR		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
2,300.0	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00
2,386.0	0.00	0.00	2,386.0	0.0	0.0	0.0	0.00	0.00	0.00
GREEN_RIVER									
2,400.0	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00
2,600.0	0.00	0.00	2,600.0	0.0	0.0	0.0	0.00	0.00	0.00
2,700.0	0.00	0.00	2,700.0	0.0	0.0	0.0	0.00	0.00	0.00
2,800.0	0.00	0.00	2,800.0	0.0	0.0	0.0	0.00	0.00	0.00
2,900.0	1.50	345.48	2,900.0	1.3	-0.3	1.3	1.50	1.50	0.00
3,000.0	3.00	345.48	2,999.9	5.1	-1.3	5.2	1.50	1.50	0.00
3,100.0	4.50	345.48	3,099.7	11.4	-3.0	11.8	1.50	1.50	0.00
3,196.7	5.95	345.48	3,196.0	19.9	-5.2	20.6	1.50	1.50	0.00
MAHOGANY									
3,200.0	6.00	345.48	3,199.3	20.3	-5.2	20.9	1.50	1.50	0.00
3,300.0	7.50	345.48	3,298.6	31.6	-8.2	32.7	1.50	1.50	0.00
3,372.5	8.59	345.48	3,370.3	41.4	-10.7	42.8	1.50	1.50	0.00
3,400.0	8.59	345.48	3,397.6	45.4	-11.8	46.9	0.00	0.00	0.00
3,500.0	8.59	345.48	3,496.4	59.9	-15.5	61.9	0.00	0.00	0.00
3,600.0	8.59	345.48	3,595.3	74.3	-19.3	76.8	0.00	0.00	0.00
3,700.0	8.59	345.48	3,694.2	88.8	-23.0	91.7	0.00	0.00	0.00
3,800.0	8.59	345.48	3,793.1	103.2	-26.7	106.7	0.00	0.00	0.00
3,900.0	8.59	345.48	3,891.9	117.7	-30.5	121.6	0.00	0.00	0.00
4,000.0	8.59	345.48	3,990.8	132.2	-34.2	136.5	0.00	0.00	0.00
4,100.0	8.59	345.48	4,089.7	146.6	-38.0	151.4	0.00	0.00	0.00
4,200.0	8.59	345.48	4,188.6	161.1	-41.7	166.4	0.00	0.00	0.00
4,300.0	8.59	345.48	4,287.5	175.5	-45.5	181.3	0.00	0.00	0.00
4,400.0	8.59	345.48	4,386.3	190.0	-49.2	196.2	0.00	0.00	0.00
4,419.9	8.59	345.48	4,406.0	192.8	-50.0	199.2	0.00	0.00	0.00
TGR3									
4,500.0	8.59	345.48	4,485.2	204.4	-53.0	211.2	0.00	0.00	0.00

Bill Barrett Corp

Planning Report

Database:	Compass	Local Co-ordinate Reference:	Well 5-7D-45 BTR
Company:	BILL BARRETT CORP	TVD Reference:	KB @ 6158.0ft (Original Well Elev)
Project:	DUCHESNE COUNTY, UT (NAD 27)	MD Reference:	KB @ 6158.0ft (Original Well Elev)
Site:	5-7D-45 BTR	North Reference:	True
Well:	5-7D-45 BTR	Survey Calculation Method:	Minimum Curvature
Wellbore:	5-7D-45 BTR		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,600.0	8.59	345.48	4,584.1	218.9	-56.7	226.1	0.00	0.00	0.00
4,700.0	8.59	345.48	4,683.0	233.3	-60.5	241.0	0.00	0.00	0.00
4,800.0	8.59	345.48	4,781.9	247.8	-64.2	256.0	0.00	0.00	0.00
4,900.0	8.59	345.48	4,880.7	262.2	-67.9	270.9	0.00	0.00	0.00
5,000.0	8.59	345.48	4,979.6	276.7	-71.7	285.8	0.00	0.00	0.00
5,100.0	8.59	345.48	5,078.5	291.1	-75.4	300.8	0.00	0.00	0.00
5,157.8	8.59	345.48	5,135.7	299.5	-77.6	309.4	0.00	0.00	0.00
5,200.0	7.95	345.48	5,177.4	305.4	-79.1	315.5	1.50	-1.50	0.00
5,289.3	6.61	345.48	5,266.0	316.3	-82.0	326.8	1.50	-1.50	0.00
DOUGLAS_CRK									
5,300.0	6.45	345.48	5,276.6	317.5	-82.3	328.0	1.50	-1.50	0.00
5,400.0	4.95	345.48	5,376.1	327.1	-84.8	337.9	1.50	-1.50	0.00
5,500.0	3.45	345.48	5,475.8	334.2	-86.6	345.3	1.50	-1.50	0.00
5,600.0	1.95	345.48	5,575.7	338.8	-87.8	350.0	1.50	-1.50	0.00
5,700.0	0.45	345.48	5,675.7	340.8	-88.3	352.1	1.50	-1.50	0.00
5,730.3	0.00	0.00	5,706.0	341.0	-88.3	352.2	1.50	-1.50	47.95
3PT_MKR									
5,800.0	0.00	0.00	5,775.7	341.0	-88.3	352.2	0.00	0.00	0.00
5,900.0	0.00	0.00	5,875.7	341.0	-88.3	352.2	0.00	0.00	0.00
6,000.0	0.00	0.00	5,975.7	341.0	-88.3	352.2	0.00	0.00	0.00
6,100.0	0.00	0.00	6,075.7	341.0	-88.3	352.2	0.00	0.00	0.00
6,130.3	0.00	0.00	6,106.0	341.0	-88.3	352.2	0.00	0.00	0.00
BLACK_SHALE_FACIES									
6,200.0	0.00	0.00	6,175.7	341.0	-88.3	352.2	0.00	0.00	0.00
6,300.0	0.00	0.00	6,275.7	341.0	-88.3	352.2	0.00	0.00	0.00
6,395.3	0.00	0.00	6,371.0	341.0	-88.3	352.2	0.00	0.00	0.00
CASTLE_PEAK									
6,400.0	0.00	0.00	6,375.7	341.0	-88.3	352.2	0.00	0.00	0.00
6,500.0	0.00	0.00	6,475.7	341.0	-88.3	352.2	0.00	0.00	0.00
6,600.0	0.00	0.00	6,575.7	341.0	-88.3	352.2	0.00	0.00	0.00
6,695.3	0.00	0.00	6,671.0	341.0	-88.3	352.2	0.00	0.00	0.00
UTELAND_BUTTE									
6,700.0	0.00	0.00	6,675.7	341.0	-88.3	352.2	0.00	0.00	0.00
6,725.3	0.00	0.00	6,701.0	341.0	-88.3	352.2	0.00	0.00	0.00
CR_1									
6,765.3	0.00	0.00	6,741.0	341.0	-88.3	352.2	0.00	0.00	0.00
CR 1A BASE									
6,800.0	0.00	0.00	6,775.7	341.0	-88.3	352.2	0.00	0.00	0.00
6,900.0	0.00	0.00	6,875.7	341.0	-88.3	352.2	0.00	0.00	0.00
6,925.3	0.00	0.00	6,901.0	341.0	-88.3	352.2	0.00	0.00	0.00
WASATCH									
7,000.0	0.00	0.00	6,975.7	341.0	-88.3	352.2	0.00	0.00	0.00
7,045.3	0.00	0.00	7,021.0	341.0	-88.3	352.2	0.00	0.00	0.00
CR_2									
7,100.0	0.00	0.00	7,075.7	341.0	-88.3	352.2	0.00	0.00	0.00
7,200.0	0.00	0.00	7,175.7	341.0	-88.3	352.2	0.00	0.00	0.00
7,300.0	0.00	0.00	7,275.7	341.0	-88.3	352.2	0.00	0.00	0.00
7,315.3	0.00	0.00	7,291.0	341.0	-88.3	352.2	0.00	0.00	0.00
CR_3									
7,400.0	0.00	0.00	7,375.7	341.0	-88.3	352.2	0.00	0.00	0.00
7,500.0	0.00	0.00	7,475.7	341.0	-88.3	352.2	0.00	0.00	0.00
7,600.0	0.00	0.00	7,575.7	341.0	-88.3	352.2	0.00	0.00	0.00
7,635.3	0.00	0.00	7,611.0	341.0	-88.3	352.2	0.00	0.00	0.00

Bill Barrett Corp

Planning Report

Database:	Compass	Local Co-ordinate Reference:	Well 5-7D-45 BTR
Company:	BILL BARRETT CORP	TVD Reference:	KB @ 6158.0ft (Original Well Elev)
Project:	DUCHESNE COUNTY, UT (NAD 27)	MD Reference:	KB @ 6158.0ft (Original Well Elev)
Site:	5-7D-45 BTR	North Reference:	True
Well:	5-7D-45 BTR	Survey Calculation Method:	Minimum Curvature
Wellbore:	5-7D-45 BTR		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
CR_4									
7,700.0	0.00	0.00	7,675.7	341.0	-88.3	352.2	0.00	0.00	0.00
7,800.0	0.00	0.00	7,775.7	341.0	-88.3	352.2	0.00	0.00	0.00
7,900.0	0.00	0.00	7,875.7	341.0	-88.3	352.2	0.00	0.00	0.00
7,910.3	0.00	0.00	7,886.0	341.0	-88.3	352.2	0.00	0.00	0.00
CR_4A									
8,000.0	0.00	0.00	7,975.7	341.0	-88.3	352.2	0.00	0.00	0.00
8,010.3	0.00	0.00	7,986.0	341.0	-88.3	352.2	0.00	0.00	0.00
CR_5									
8,100.0	0.00	0.00	8,075.7	341.0	-88.3	352.2	0.00	0.00	0.00
8,180.3	0.00	0.00	8,156.0	341.0	-88.3	352.2	0.00	0.00	0.00
CR_6									
8,200.0	0.00	0.00	8,175.7	341.0	-88.3	352.2	0.00	0.00	0.00
8,210.3	0.00	0.00	8,186.0	341.0	-88.3	352.2	0.00	0.00	0.00

Formations						
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)	
2,386.0	2,386.0	GREEN_RIVER		0.00		
3,196.7	3,196.0	MAHOGANY		0.00		
4,419.9	4,406.0	TGR3		0.00		
5,289.3	5,266.0	DOUGLAS_CRK		0.00		
5,730.3	5,706.0	3PT_MKR		0.00		
6,130.3	6,106.0	BLACK_SHALE_FACIES		0.00		
6,395.3	6,371.0	CASTLE_PEAK		0.00		
6,695.3	6,671.0	UTELAND_BUTTE		0.00		
6,725.3	6,701.0	CR_1		0.00		
6,765.3	6,741.0	CR 1A BASE		0.00		
6,925.3	6,901.0	WASATCH		0.00		
7,045.3	7,021.0	CR_2		0.00		
7,315.3	7,291.0	CR_3		0.00		
7,635.3	7,611.0	CR_4		0.00		
7,910.3	7,886.0	CR_4A		0.00		
8,010.3	7,986.0	CR_5		0.00		
8,180.3	8,156.0	CR_6		0.00		

SURFACE USE PLAN

BILL BARRETT CORPORATION

5-7D-45 BTR Well Pad

Lot 2 (SW NW), 2321' FNL and 899' FWL, Section 7, T4S-R5W, USB&M (surface hole)

Lot 2 (SW NW), 1980' FNL and 810' FWL, Section 7, T4S-R5W, USB&M (bottom hole)

Duchesne County, Utah

The onsite inspection for this pad occurred on November 16, 2011. This is a new pad with a total of one proposed well. Plat changes requested at the onsite are reflected within this APD and summarized below.

- a) Move pad entrance 50' north to the center of the pad area;
- b) Relocate topsoil from Corners 2 and 8 to Corner 7 area and from Corner B to Corner 6;
- c) Relocate production equipment near the pad entrance on cut;
- d) Double line reserve pit to insure leakage does not occur.

The excavation contractor would be provided with an approved copy of the surface use plan of operations before initiating construction

1. Existing Roads:

- a. The proposed well site is located approximately 7.9 miles southwest of Duchesne, Utah. Maps and directions reflecting the route to the proposed well site are included (see Topographic maps A and B).
- b. The existing State Highway 40 would be utilized for 4.4 miles to the existing BBC maintained 16-7-45 BTR well site access road that would be utilized for 2.6 miles and provides access to the planned new access road.
- c. Project roads would require routine year-round maintenance to provide year-round access. Maintenance would include inspections, reduction of ruts and holes, maintenance to keep water off the road, replacement of surfacing materials, and clearing of sediment blocking ditches and culverts. Should snow removal become necessary, roads would be cleared with a motor grader and snow would be stored along the down gradient side to prohibit runoff onto the road. Aggregate would be used as necessary to maintain a solid running surface and minimize dust generation.
- d. Vehicle operators would obey posted speed restrictions and observe safe speeds commensurate with road and weather conditions. Travel would be limited to the existing access roads and proposed access road.
- e. The use of roads under State and Duchesne County Road Department maintenance are necessary to access the project area with no improvements proposed. No encroachment or pipeline crossing permits are required.

Bill Barrett Corporation
Surface Use Plan
5-7D-45 BTR
Duchesne County, UT

- f. All existing roads would be maintained and kept in good repair during all phases of operation.

2. Planned Access Road:

- a. Approximately 2,484 feet of new access road trending northwest is planned from the proposed 14-7-45 and 2-18D-45 BTR access roads. The 14-7-45 and 2-18D-45 BTR access has been applied for and continues an additional 2,321 feet to the existing 16-7-45 BTR access road (see Topographic Map B).
- b. The planned access road would be constructed to a 30-foot ROW width with an 18-foot travel surface. See section 12.d. below for disturbance estimates.
- c. New road construction and improvements of existing roads would typically require the use of motor graders, crawler tractors, 10-yard end dump trucks, and water trucks. The standard methodology for building new roads involves the use of a crawler tractor or track hoe to windrow the vegetation to one side of the road corridor, remove topsoil to the opposing side of the corridor, and rough-in the roadway. This is followed by a grader or bulldozer to establish barrow ditches and crown the road surface. Where culverts are required, a track hoe or backhoe would trench the road and install the culverts. Some hand labor would be required when installing and armoring culverts. Road base or gravel in some instances would be necessary and would be hauled in and a grader used to smooth the running surface.
- d. The proposed road would be constructed to facilitate drainage, control erosion and minimize visual impacts by following natural contours where practical. No unnecessary side-casting of material would occur on steep slopes.
- e. A maximum grade of 10% would be maintained throughout the project with minimum cuts and fills, as necessary, to access the well.
- f. Excess rock from construction of the pad may be used for surfacing of the access road if necessary. Any additional aggregate necessary would be obtained from private or State of Utah lands in conformance with applicable regulations. Aggregate would be of sufficient size, type, and amount to allow all weather access and alleviate dust.
- g. Where topsoil removal is necessary, it would be windrowed (i.e. stockpiled/accumulated along the edge of the ROW and in a low row/pile parallel with the ROW) and re-spread over the disturbed area after construction and backfilling are completed. Vegetation removed from the disturbed area would also be re-spread to provide protection, nutrient recycling, and a seed source for reclamation.
- h. Turnouts are not proposed.

Bill Barrett Corporation
Surface Use Plan
5-7D-45 BTR
Duchesne County, UT

- i. One 18 inch culvert and no low-water crossings are anticipated. Adequate drainage structures, where necessary, would be incorporated into the remainder of the road to prevent soil erosion and accommodate all-weather traffic.
 - j. No gates or cattle guards are anticipated at this time.
 - k. Surface disturbance and vehicular travel would be limited to the approved location access road. Adequate signs would be posted, as necessary, to warn the public of project related traffic.
 - l. All access roads and surface disturbing activities would conform to the appropriate standard, **no higher than necessary**, to accommodate their intended function adequately as outlined in the Bureau of Land Management and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development, Fourth Edition – Revised 2007.
 - m. The operator would be responsible for all maintenance needs of the new access road.
3. Location of Existing Wells (see One-Mile Radius Map):
- a. Following is a list of wells with surface hole locations within a one-mile radius of the proposed pad:
 - i. water wells none
 - ii. injection wells none
 - iii. disposal wells none
 - iv. drilling wells none
 - v. temp shut-in wells none
 - vi. producing wells one
 - vii. abandoned wells one
4. Location of Production Facilities
- a. Surface facilities would consist of a wellhead, separator, gas meter, combustor, (1) 500 gal methanol tank, (1) 500 glycol tank, (3) 500 bbl oil tanks, (1) 500 bbl water tank, (1) 500 bbl test tank, (1) 1000 gal propane tank, a pumping unit or Roto-flex unit or ESP or gas lift unit, electrical or with a natural gas or diesel fired motor, solar panels, solar chemical and methanol pumps and one trace pump. See attached proposed facility diagram.
 - b. Most wells would be fitted with a pump jack or Roto-flex unit or ESP or gas lift to assist liquid production. The prime mover for pump jacks or Roto-flex units would be small (100 horsepower or less), electric motor or natural gas or diesel fired internal combustion engines. If a gas lift is installed, it would be set on a 10 ft x 25 ft pad and the prime mover would be a natural gas-fired internal combustion engine rated at 200 horsepower or less or an electric compressor of similar horsepower powered by electricity.

Bill Barrett Corporation
Surface Use Plan
5-7D-45 BTR
Duchesne County, UT

- c. The tank battery would be surrounded by a secondary containment berm of sufficient capacity to contain 1.1 times the entire capacity of the largest single tank and sufficient freeboard to contain precipitation. All loading lines and valves would be placed inside the berm surrounding the tank battery or would utilize catchment basins to contain spills. All liquid hydrocarbon production and measurement shall conform to the provisions of 43 CFR 3162.7-2 and Onshore Oil and Gas Order No. 4 for the measurement of oil.
- d. Gas meter run(s) would be constructed and located on lease within 500 feet of the wellheads. Meter runs would be housed and/or fenced. As practicably feasible, meters would be equipped with remote telemetry monitoring systems. All gas production and measurement shall comply with the provisions of 43 CFR 3162.7-3, Onshore Oil and Gas Order No. 5, and American Gas Association (AGA) Report No. 3.
- e. A combustor may be installed at this location for control of associated condensate tank emissions. A combustor ranges from 24 inches to 48 inches wide and is approximately 27 ft tall. Combustor placement would be on existing disturbance.
- f. Approximately 2,512 feet of pipeline corridor (see Topographic Map C) containing up to three lines (one gas pipeline up to 8 inch in diameter, one water line up to 4 inch in diameter and one residue line up to 4 inch in diameter) is proposed trending southeast to the proposed 14-7-45 and 2-18D-45 BTR pipeline corridor. The 14-7-45 and 2-18D-45 BTR pipeline corridor has been applied for and continues approximately 2,321 feet to the existing pipeline corridor. Pipelines would be constructed of steel, polyethylene or fiberglass and would connect to the proposed pipeline servicing nearby BBC and El Paso wells. The pipeline crosses entirely Ute Tribe surface.
- g. The new segment of gas pipeline would be surface laid within a 30 foot wide pipeline corridor adjacent to the proposed access road. See 12.d below for disturbance estimates.
- h. Construction of the ROW would temporarily utilize the 30 foot disturbed width for the road for a total disturbed width of 60 foot for the road and pipeline corridors. The use of the proposed well site and access roads would facilitate the staging of the pipeline construction.
- i. Pipeline construction methods and practices would be planned and conducted by BBC with the objective of enhancing reclamation and fostering the re-establishment of the native plant community.
- j. All permanent above-ground structures would be painted a flat, non-reflective color, such as Yuma Green, to match the standard environmental colors. All facilities would be painted the designated color at the time of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) may be excluded.

Bill Barrett Corporation
 Surface Use Plan
 5-7D-45 BTR
 Duchesne County, UT

- k. Site security guidelines identified in 43 CFR 3162.7-5 and Onshore Oil and Gas Order No. 3 would be adhered to. Any modifications to proposed facilities would be reflected in the site security diagram submitted.
- l. The site would require periodic maintenance to ensure that drainages are kept open and free of debris, and that surfaces are properly treated to reduce erosion, fugitive dust, and impacts to adjacent areas.

5. Location and Type of Water Supply:

- a. Water for the drilling and completion would be trucked from any of the following locations:

Water Right No. and Application or Change No.	Applicant	Allocation	Date	Point of Diversion	Source
43-180	Duchesne City Water Service District	5 cfs	8/13/2004	Knight Diversion Dam	Duchesne River
43-1202, Change a13837	Myton City	5.49 cfr and 3967 acre feet	3/21/1986	Knight Diversion Dam	Duchesne River
43-10444, Appln A57477	Duchesne County Upper Country Water	2 cfs	1994	Ditch at Source	Cow Canyon Spring
43-10446, Appln F57432	Duchesne County Upper Country Water	1.58 cfs	1994	Ditch at Source	Cow Canyon Spring
43-1273, Appln A17462	J.J.N.P. Company	7 cfs	1946	Strawberry River	Strawberry River
43-1273, Appln t36590	J.J.N.P. Company	4 cfs	6/03/2010	Strawberry River	Strawberry River
43-2505, Appln t37379	McKinnon Ranch Properties, LC	1.3 cfs	4/28/2011	Pumped from Sec, 17, T4SR6W	Water Canyon Lake
43-12415, Change A17215a	Peatross Ranch, LLC	1.89 cfs	09/2011	Dugout Pond	Strawberry River

- b. No new water well is proposed with this application.
- c. Should additional water sources be pursued they would be properly permitted through the State of Utah – Division of Water Rights.
- d. Water use would vary in accordance with the formations to be drilled but would be up to approximately 5.41 acre feet for drilling and completion operations.

Bill Barrett Corporation
Surface Use Plan
5-7D-45 BTR
Duchesne County, UT

6. Source of Construction Material:

- a. The use of materials would conform to 43 CFR 3610.2-3.
- b. No construction materials would be removed from the lease or EDA area.
- c. If any additional gravel is required, it would be obtained from a local supplier having a permitted source of materials within the general area.

7. Methods of Handling Waste Disposal:

- a. All wastes associated with this application would be contained and disposed of utilizing approved facilities.
- b. The reserve pit would be constructed so as not to leak, break or allow any discharge.
- c. The reserve would be double-lined with 12 mil (minimum) thickness polyethylene nylon reinforced liner material. The liner(s) would overlay straw, dirt and/or bentonite if rock is encountered during excavation. The liner would overlap the pit walls and be covered with dirt and/or rocks to hold them in place. No trash, scrap pipe, or other materials that could puncture the liner would be discarded in the pit. A minimum of two feet of free board would be maintained between the maximum fluid level and the top of the reserve pit at all times.
- d. To deter livestock from entering the pit, the three sides exterior to the location would be fenced before drilling starts. Following the conclusion of drilling and completion activities, the fourth side would also be fenced.
- e. Drill cuttings would be contained in the pit and buried on-site for a period not to exceed six months, weather permitting
- f. Produced fluids from the well other than water would be decanted into steel test tank(s) until such time as construction of production facilities is completed. Any oil that may be accumulated would be transferred to a permanent production tank. Produced water may be used in further drilling and completion activities, evaporated in the pit, or would be hauled to one of the state-approved disposal facilities below:

Disposal Facilities
1. RNI Industries, Inc. – Pleasant Valley Disposal Pits, Sec. 25, 26, 35 & 36, T4S-R3W
2. Pro Water LLC – Blue Bench 13-1 Disposal Well (43-013-30971) NENE, Sec. 13, T3S-R5W
3. RN Industries, Inc. – Bluebell Disposal Ponds, Sec. 2, 4 & 9, T2S-R2W
4. Water Disposal, Inc. – Harmston 1-32-A1 Disposal Well (43-013-30224), UTR #00707, Sec. 32, T1S-R1W

Bill Barrett Corporation
 Surface Use Plan
 5-7D-45 BTR
 Duchesne County, UT

Disposal Facilities
5. Unified Water Pits – Sec. 31, T2S-R4W
6. Iowa Tank Line Pits – 8500 BLM Fence Road, Pleasant Valley
7. Western Water Solutions – Sand Pass Ranch, Sections 9 and 10, T4S-R1W, permit #WD-01-2011

- g. Any salts and/or chemicals, which are an integral part of the drilling system, would be disposed of in the same manner as the drilling fluid.
- h. Any spills of oil, condensate, produced or frac water, drilling fluids, or other potentially deleterious substances would be recovered and either returned to its origin or disposed of at an approved disposal site, most likely in Duchesne, Utah.
- i. Chemicals on the EPA's Consolidated List of Chemicals subject to reporting under Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA) may be used or stored in quantities over reportable quantities. In the course of drilling, BBC could potentially store and use diesel fuel, sand (silica), hydrochloric acid, and CO₂ gas, all described as hazardous substances in 40 CFR Part 302, Section 302.4, in quantities exceeding 10,000 pounds. In addition, natural gas condensate and crude oil and methanol may be stored or used in reportable quantities. Small quantities of retail products (paint/spray paints, solvents {e.g., WD-40}, and lubrication oil) containing non-reportable volumes of hazardous substances may be stored and used on site at any time. No extremely hazardous substances, as defined in 40 CFR 355, would be used, produced, stored, transported or disposed of in association with the drilling, testing or completion of the wells.
- j. Portable toilets and trash containers would be located onsite during drilling and completion operations. A commercial supplier would install and maintain portable toilets and equipment and would be responsible for removing sanitary waste. Sanitary waste facilities (i.e. toilet holding tanks) would be regularly pumped and their contents disposed of at approved sewage disposal facilities in Duchesne, and/or Uintah Counties, in accordance with applicable rules and regulations regarding sewage treatment and disposal. Accumulated trash and nonflammable waste materials would be hauled to an approved landfill once a week or as often as necessary. All debris and waste materials not contained in the trash containers would be cleaned up, removed from the construction ROW, well pad, or worker housing location, and disposed of at an approved landfill. Trash would be cleaned up everyday.
- k. Sanitary waste equipment and trash bins would be removed from the Project Area upon completion of access road or pipeline construction; following drilling and completion operations at an individual well pad; when worker housing is no longer needed; or as required.
- l. A flare pit may be constructed a minimum of 110 feet from the wellhead(s) and may be used during completion work. In the event a flare pit proves to be

Bill Barrett Corporation
Surface Use Plan
5-7D-45 BTR
Duchesne County, UT

unworkable, a temporary flare stack or open top tank would be installed. BBC would flow back as much fluid and gas as possible into pressurized vessels, separating the fluids from the gas. In some instances, due to the completion fluids utilized within the Project Area, it is not feasible to direct the flow stream from the wellbore through pressurized vessels. In such instances BBC proposes to direct the flow to the open top tanks until flow through the pressurized vessels is feasible. At which point the fluid would either be returned to the reserve pit or placed into a tank(s). The gas would be directed to the flare pit, flare stack (each with a constant source of ignition), or may be directed into the sales pipeline.

- m. Hydrocarbons would be removed from the reserve pit would as soon as practical. In the event immediate removal is not practical, the reserve pit would be flagged overhead or covered with wire or plastic mesh to protect migrating birds.

8. Ancillary Facilities:

- a. Garbage containers and portable toilets would be located on the well pad.
- b. On well pads where active drilling and completion is occurring, temporary housing would be provided on location for the well pad supervisor, geologist, tool pusher, and others that are required to be on location at all times. The well pad could include up to five single wide mobile homes or fifth wheel campers/trailers.
- c. A surface powerline corridor 2,484 feet in length is proposed for installation by third-party installer within a 150 foot wide powerline corridor adjacent to the proposed access road. See 12.d below for disturbance estimates.

9. Well Site Layout:

- a. The well would be properly identified in accordance with 43 CFR 3162.6.
- b. The pad layout, cross section diagrams and rig layout are enclosed (see Figures 1 and 2).
- c. The pad and road designs are consistent with industry specifications.
- d. The pad has been staked at its maximum size of 400 feet x 255 feet with an inboard reserve pit size of 235 feet x 70 feet x 8 feet deep. See section 12.d below for disturbance estimates.
- e. Within the approved well pad location, a crawler tractor would strip whatever topsoil is present and stockpile it along the edge of the well pad for use during reclamation. Vegetation would be distributed along the sides of the well pad.
- f. Fill from pit excavation would be stockpiled along the edge of the pit and the adjacent edge of the well pad.

Bill Barrett Corporation
Surface Use Plan
5-7D-45 BTR
Duchesne County, UT

- g. Use of erosion control measures, including proper grading to minimize slopes, diversion terraces and ditches, mulching, terracing, riprap, fiber matting, temporary sediment traps, and broad-based drainage dips or low water crossings would be employed by BBC as necessary and appropriate to minimize erosion and surface runoff during well pad construction and operation. Cut and fill slopes would be constructed such that stability would be maintained for the life of the activity.
- h. All cut and fill slopes would be such that stability can be maintained for the life of the activity.
- i. Diversion ditches would be constructed, if necessary, around the well site to prevent surface waters from entering the well site area.
- j. Water application may be implemented if necessary to minimize the amount of fugitive dust.
- k. All surface disturbing activities would be supervised by a qualified, responsible company representative who is aware of the terms and conditions of the APD and specifications in the approved plans.

10. Plan for Restoration of the Surface:

- a. A site specific reclamation plan would be submitted, if requested, within 90 days of location construction to the surface managing agency.
- b. Site reclamation would be accomplished for portions of the well pad not required for the continued operation of the well on this pad within six months of completion, weather permitting.
- c. The operator would control noxious weeds along access road use authorizations and well site by spraying or mechanical removal, according to the Utah Noxious Weed Act and as set forth in the approved surface damage agreements.
- d. Rat and mouse holes would be filled and compacted from bottom to top immediately upon release of the drilling rig from location. Upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1. The reserve pit would be allowed to dry prior to the commencement of backfilling work. No attempts would be made to backfill the reserve pit until it is free of standing water. Once dry, the liner would be torn and perforated before backfilling.
- e. The reserve pit and that portion of the location not needed for production facilities/operations would be recontoured to the approximate natural contours. Areas not used for production purposes would be backfilled and blended into the surrounding terrain, reseeded and erosion control measures installed. Mulching, erosion control measures and fertilization may be required to achieve acceptable stabilization. Back slopes and fore slopes would be reduced as practical and

Bill Barrett Corporation
Surface Use Plan
5-7D-45 BTR
Duchesne County, UT

scarified with the contour. The reserved topsoil would be evenly distributed over the slopes and scarified along the contour. Slopes would be seeded with the Ute Tribe specified seed mix.

- f. Topsoil salvaged from the drill site and stored for more than one year would be placed at the location indicated on the well site layout drawing and graded to a depth optimum to maintain topsoil viability, seeded with the Ute Tribe prescribed seed mixture and covered with mulch for protection from wind and water erosion and to discourage the invasion of weeds.

11. Surface and Mineral Ownership:

- a. Surface ownership – Ute Indian Tribe - 988 South 7500 East; Ft. Duchesne, Utah 84026; 435-725-4982.
- b. Mineral ownership – Ute Indian Tribe - 988 South 7500 East; Ft. Duchesne, Utah 84026; 435-725-4982.

12. Other Information:

- a. Montgomery Archeological Consultants has conducted a Class III archeological survey. A copy of the report has been submitted under separate cover to the appropriate agencies by Montgomery as report 10-222 dated January 14, 2011.
- b. BBC would require that their personnel, contractors, and subcontractors to comply with Federal regulations intended to protect archeological and cultural resources.
- c. Project personnel and contractors would be educated on and subject to the following requirements:
 - No dogs or firearms within the Project Area.
 - No littering within the Project Area.
 - Smoking within the Project Area would only be allowed in off-operator active locations or in specifically designated smoking areas. All cigarette butts would be placed in appropriate containers and not thrown on the ground or out windows of vehicles; personnel and contractors would abide by all fire restriction orders.
 - Campfires or uncontained fires of any kind would be prohibited.
 - Portable generators used in the Project Area would have spark arrestors.

Bill Barrett Corporation
 Surface Use Plan
 5-7D-45 BTR
 Duchesne County, UT

d. Disturbance estimates:


Approximate Acreage Disturbances			
Well Pad		3.151	acres
Access	2484 feet	1.711	acres
Pipeline	2512 feet	1.730	acres
Powerline	2484 feet	8.555	acres
Total		15.147	acres

OPERATOR CERTIFICATION

Certification:


I hereby certify that I, or someone under my direction supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein would be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application and that bond coverage is provided under Bill Barrett Corporations federal nationwide bond. These statements are subject to the provisions of 18 U.S.C. 1001 for the filings of false statements.

Executed this 4th day of April 2012
 Name: Venessa Langmacher
 Position Title: Senior Permit Analyst
 Address: 1099 18th Street, Suite 2300, Denver, CO 80202
 Telephone: 303-312-8172
 E-mail: vlangmacher@billbarrettcorp.com
 Field Representative Kary Eldredge / Bill Barrett Corporation
 Address: 1820 W. Highway 40, Roosevelt, UT 84066
 Telephone: 435-725-3515 (office); 435-724-6789 (mobile)
 E-mail: keldredge@billbarrettcorp.com


 Venessa Langmacher, Senior Permit Analyst


BILL BARRETT CORPORATION

TYPICAL 5,000 p.s.i. BLOWOUT PREVENTER

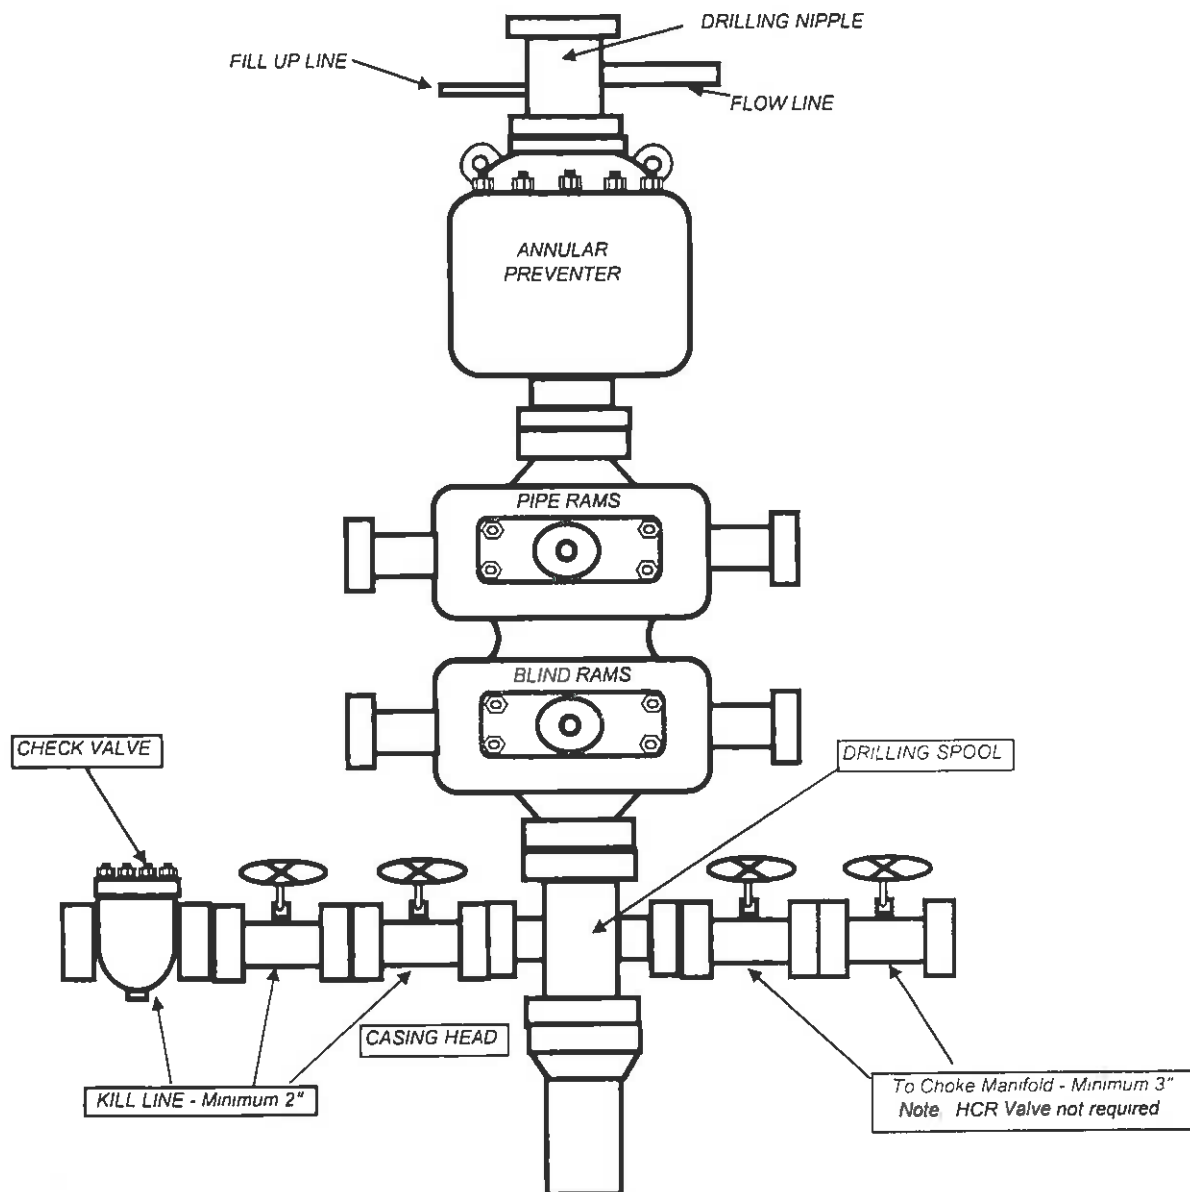

BILL BARRETT CORPORATION

TYPICAL 5,000 p.s.i. CHOKE MANIFOLD

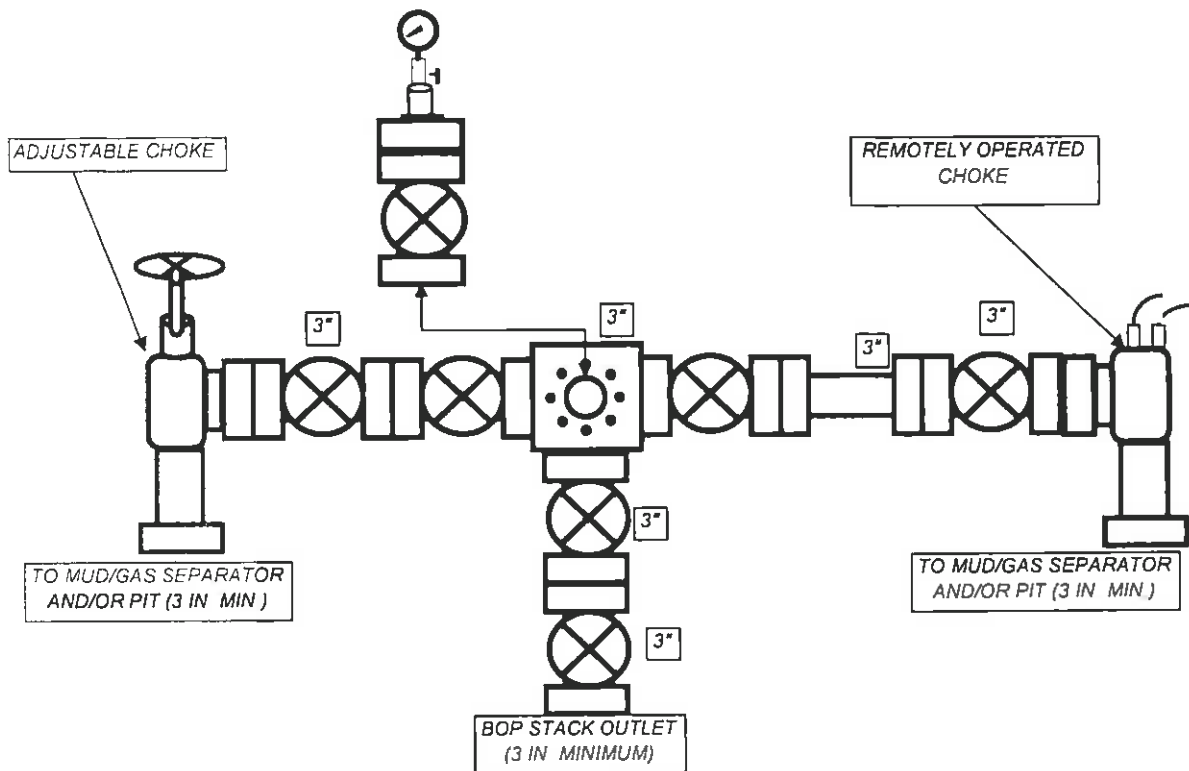



Bill Barrett Corporation

April 4, 2012

Ms. Diana Mason – Petroleum Technician
State of Utah Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
P. O. Box 145801
Salt Lake City, Utah 84114-5801

Re: Directional Drilling R649-3-11
Blacktail Ridge Area #5-7D-45 BTR Well
Surface: 2,321' FNL & 899' FWL, SWNW, 7-T4S-R5W, USM
Bottom Hole: 1,980' FNL & 810' FWL, SWNW, 7-T4S-R5W, USM
Duchesne County, Utah

Dear Ms. Mason,

Pursuant to the filing of Bill Barrett Corporation's ("BBC") Application for Permit to Drill the above referenced well, we hereby submit this letter in accordance with Oil & Gas Conservation Rules R649-2, R649-3, R649-10 and R649-11, pertaining to the Location and Siting of Wells.

- The proposed location is within our Blacktail Ridge Area.
- BBC is permitting this well as a directional well in order to minimize surface disturbance. By locating the well at the surface location and directionally drilling from this location, BBC will be able to utilize the existing road and pipelines in the area.
- The well will be drilled under an Exploration and Development Agreement between the Ute Indian Tribe and Ute Distribution Corporation. Ute Energy, LLC owns a right to participate in this well.
- BBC certifies that it is the working interest owner of all lands within 460 feet of the proposed well location, and together with Ute Energy, LLC, we own 100% of the working interest in these lands.

Based on the information provided, BBC requests that the permit be granted pursuant to R649-3-11. Should you have any questions or need further information, please contact me at 303-312-8544.

Sincerely,

David Watts
Landman

1099 18TH STREET
SUITE 2300
DENVER, CO 80202
P 303.293.9100
F 303.291.0420

BILL BARRETT CORPORATION

LOCATION LAYOUT FOR

#5-7D-45 BTR

SECTION 7, T4S, R5W, U.S.B.&M.

2321' FNL 899' FWL

FIGURE #1


SCALE: 1" = 60'

DATE: 11-30-10

DRAWN BY: S.B.

REV: 11-30-11 B.D.H.

REV: 02-15-12 S.B.

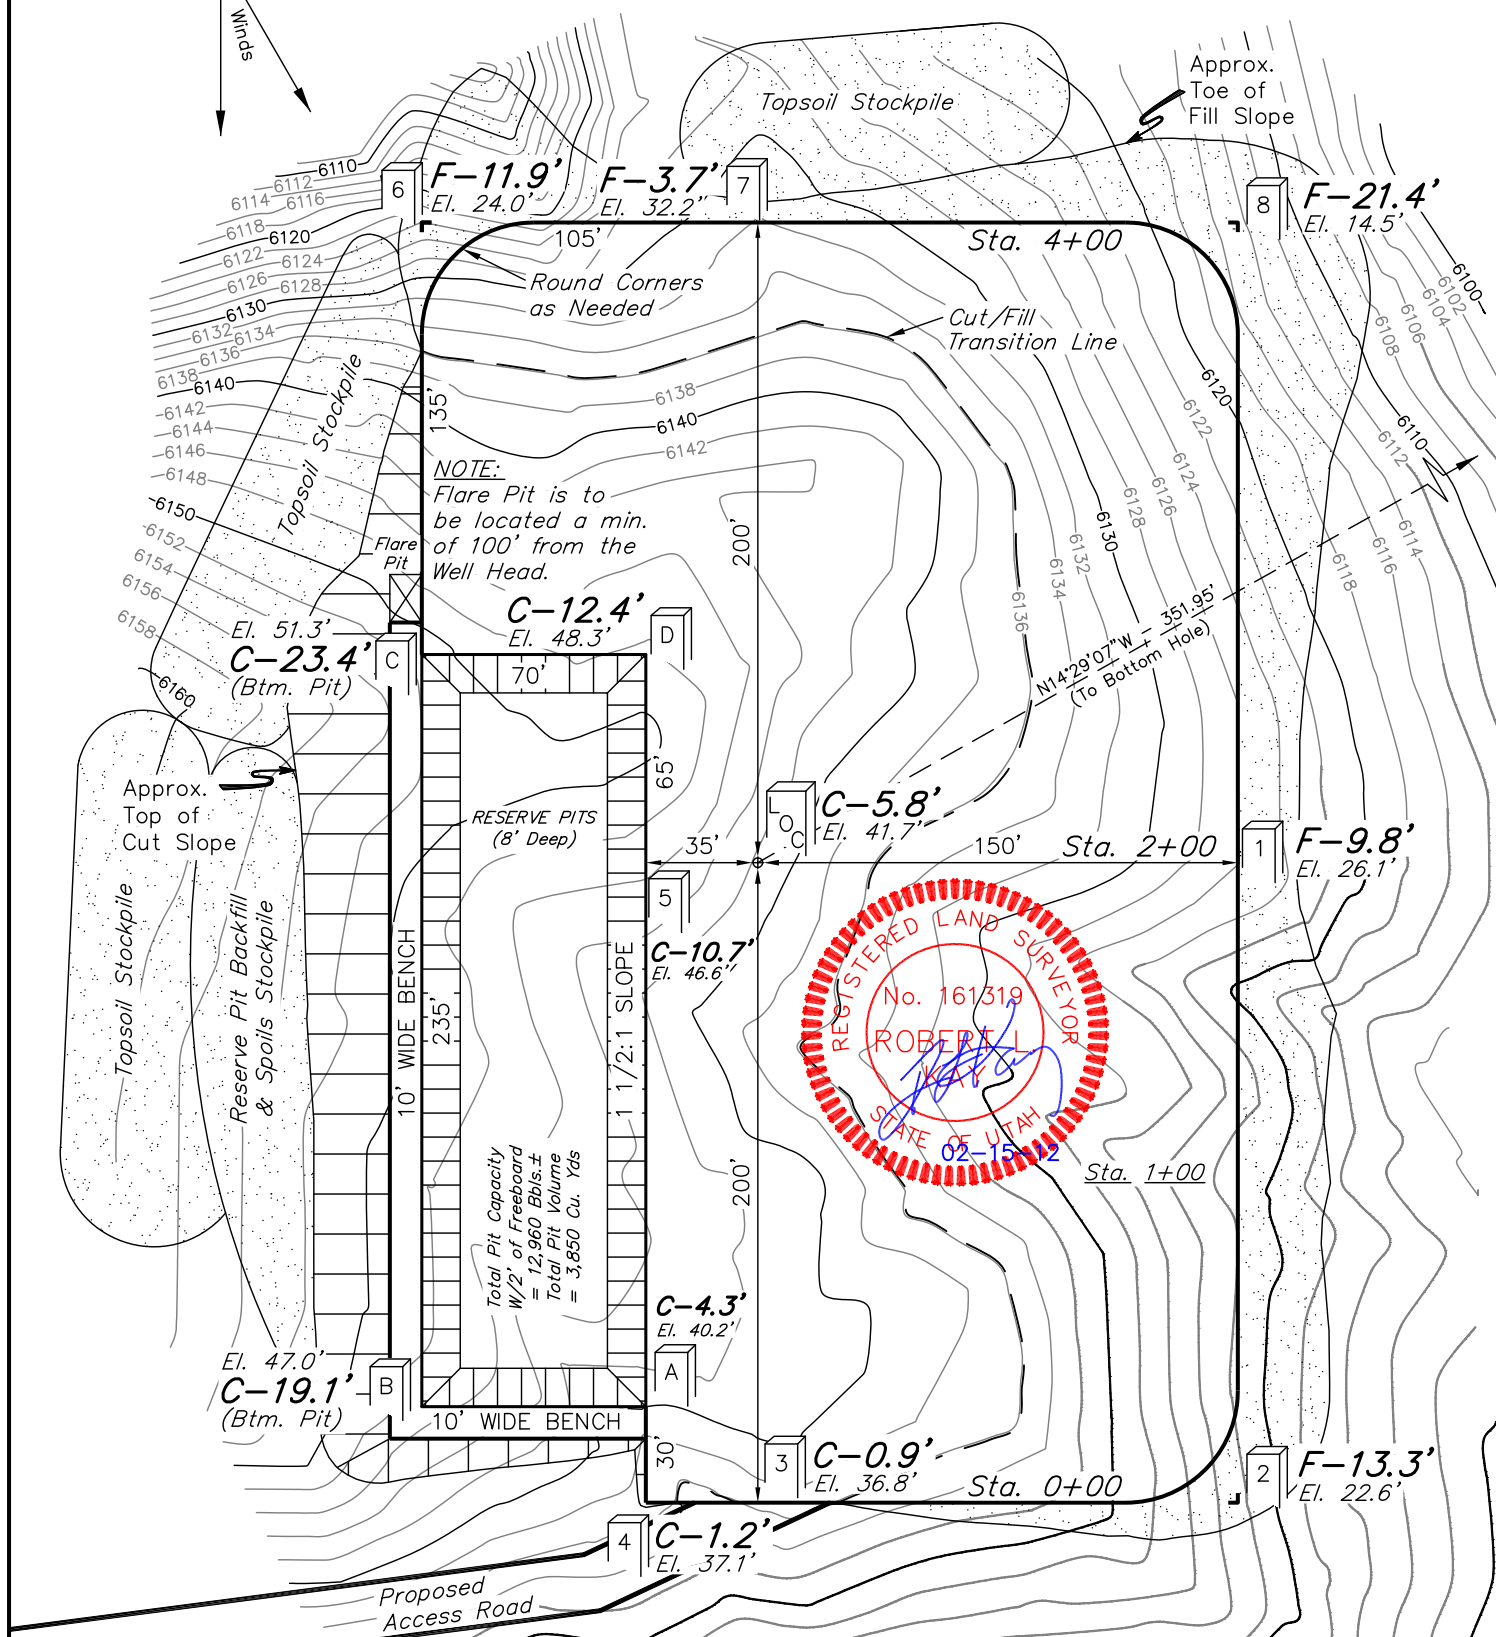

Elev. Ungraded Ground At Loc. Stake = **6141.7'**
 FINISHED GRADE ELEV. AT LOC. STAKE = **6135.9'**

UINTAH ENGINEERING & LAND SURVEYING
 85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017



RECEIVED: April 04, 2012

X-Section
Scale
1" = 40'
1" = 100'
DATE: 11-30-10
DRAWN BY: S.B.

BILL BARRETT CORPORATION

TYPICAL CROSS SECTION FOR

#5-7D-45 BTR
SECTION 7, T4S, R5W, U.S.B.&M.
2321' FNL 899' FWL

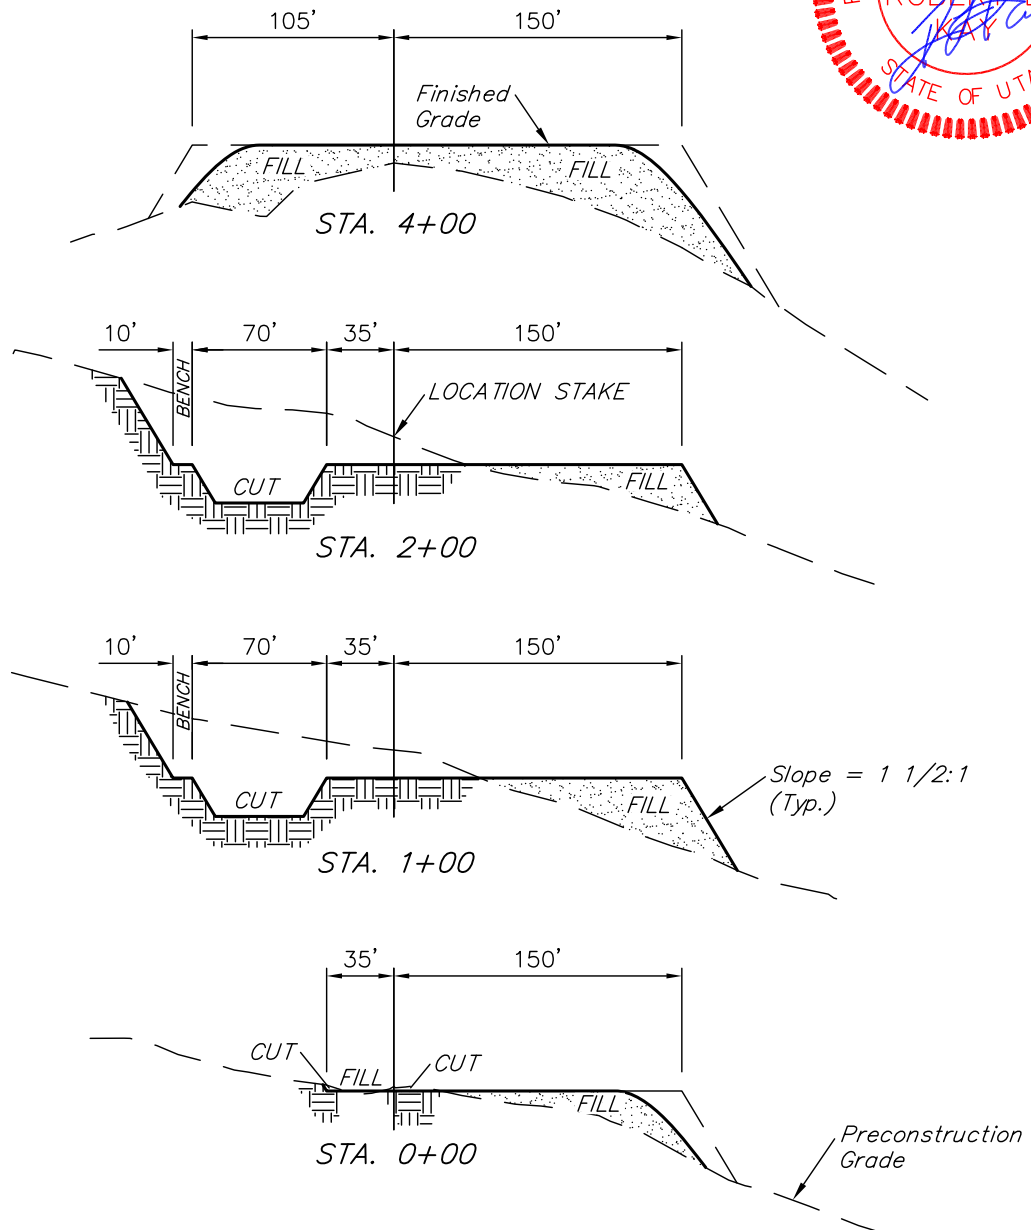FIGURE #2**NOTE:**

Topsoil should not be
Stripped Below Finished
Grade on Substructure Area.

* NOTE:
FILL QUANTITY INCLUDES
5% FOR COMPACTION

APPROXIMATE YARDAGES

(12") Topsoil Stripping = 5,120 Cu. Yds.
Remaining Location = 19,530 Cu. Yds.
TOTAL CUT = 24,650 CU.YDS.
FILL = 17,610 CU.YDS.

EXCESS MATERIAL = 7,040 Cu. Yds.
Topsoil & Pit Backfill = 7,040 Cu. Yds.
(1/2 Pit Vol.)
EXCESS UNBALANCE = 0 Cu. Yds.
(After Interim Rehabilitation)

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

RECEIVED: April 04, 2012

BILL BARRETT CORPORATION

TYPICAL RIG LAYOUT FOR

#5-7D-45 BTR

SECTION 7, T4S, R5W, U.S.B.&M.

2321' FNL 899' FWL






FIGURE #3

SCALE: 1" = 60'

DATE: 11-30-10

DRAWN BY: S.B.

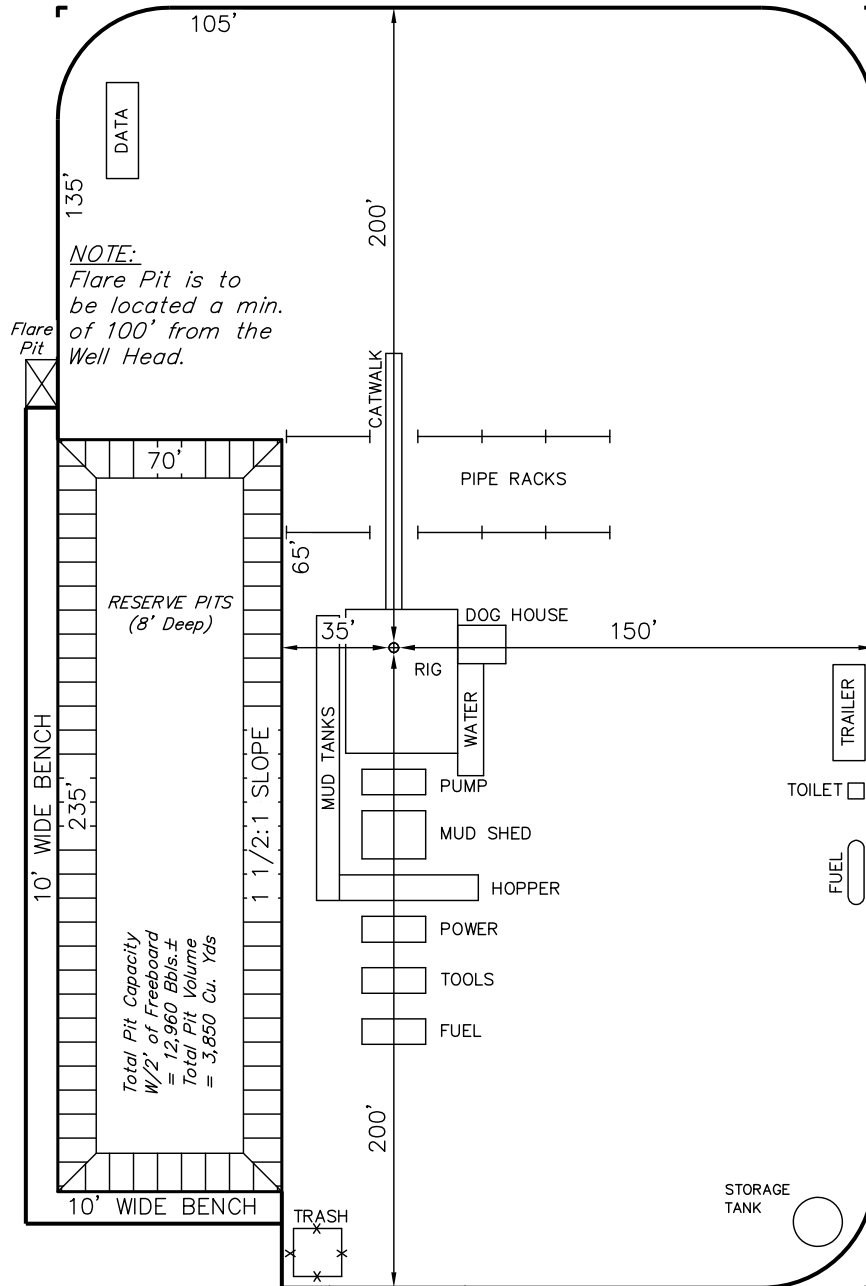

Proposed Access Road

UINTAH ENGINEERING & LAND SURVEYING

85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017



RECEIVED: April 04, 2012

BILL BARRETT CORPORATION
INTERIM RECLAMATION PLAN FOR
#5-7D-45 BTR
SECTION 7, T4S, R5W, U.S.B.&M.
2321' FNL 899' FWL



FIGURE #4

SCALE: 1" = 60'
 DATE: 11-30-10
 DRAWN BY: S.B.
 REV: 10-24-11 K.O.
 REV: 11-30-11 B.D.H

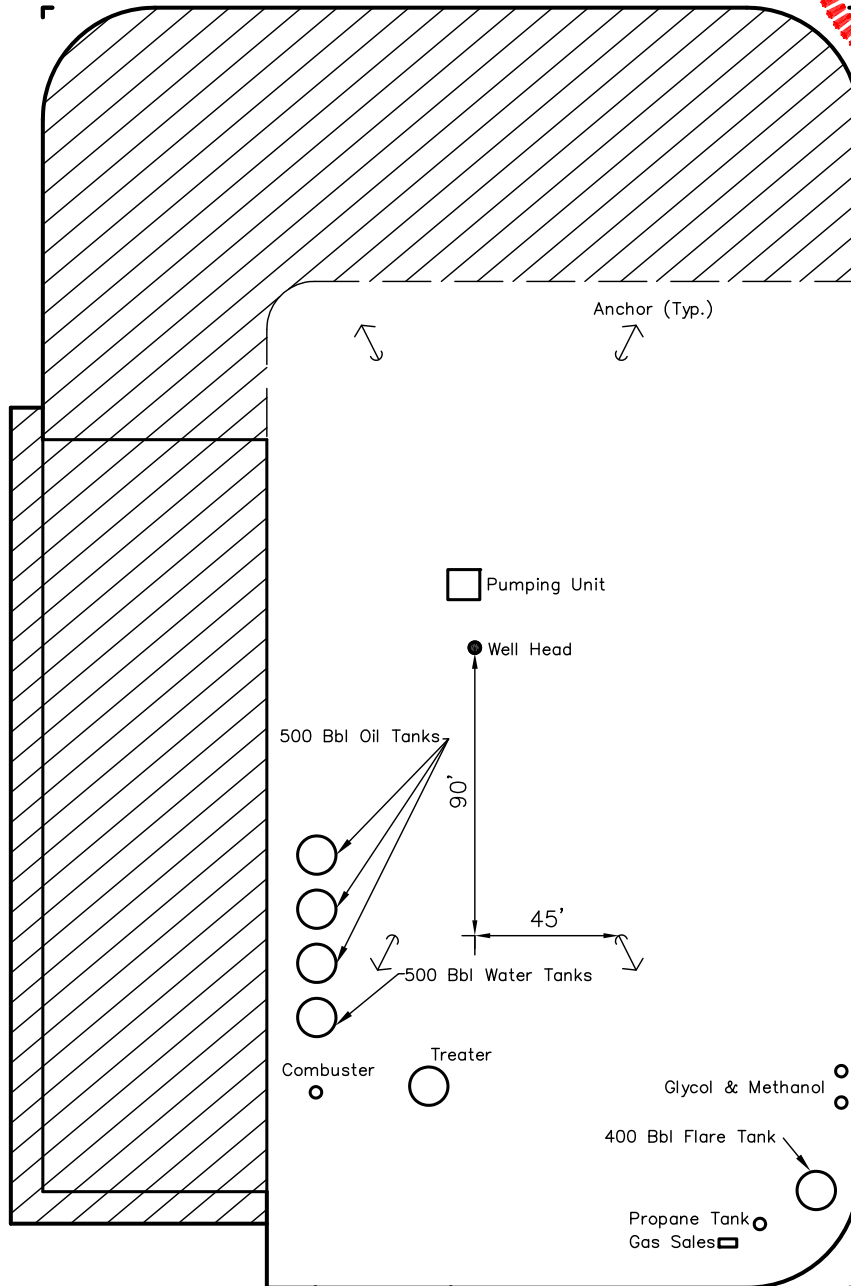


INTERIM RECLAMATION

APPROXIMATE ACREAGES
UN-RECLAIMED = ± 1.328 ACRES

UINTAH ENGINEERING & LAND SURVEYING
 85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

RECEIVED: April 04, 2012

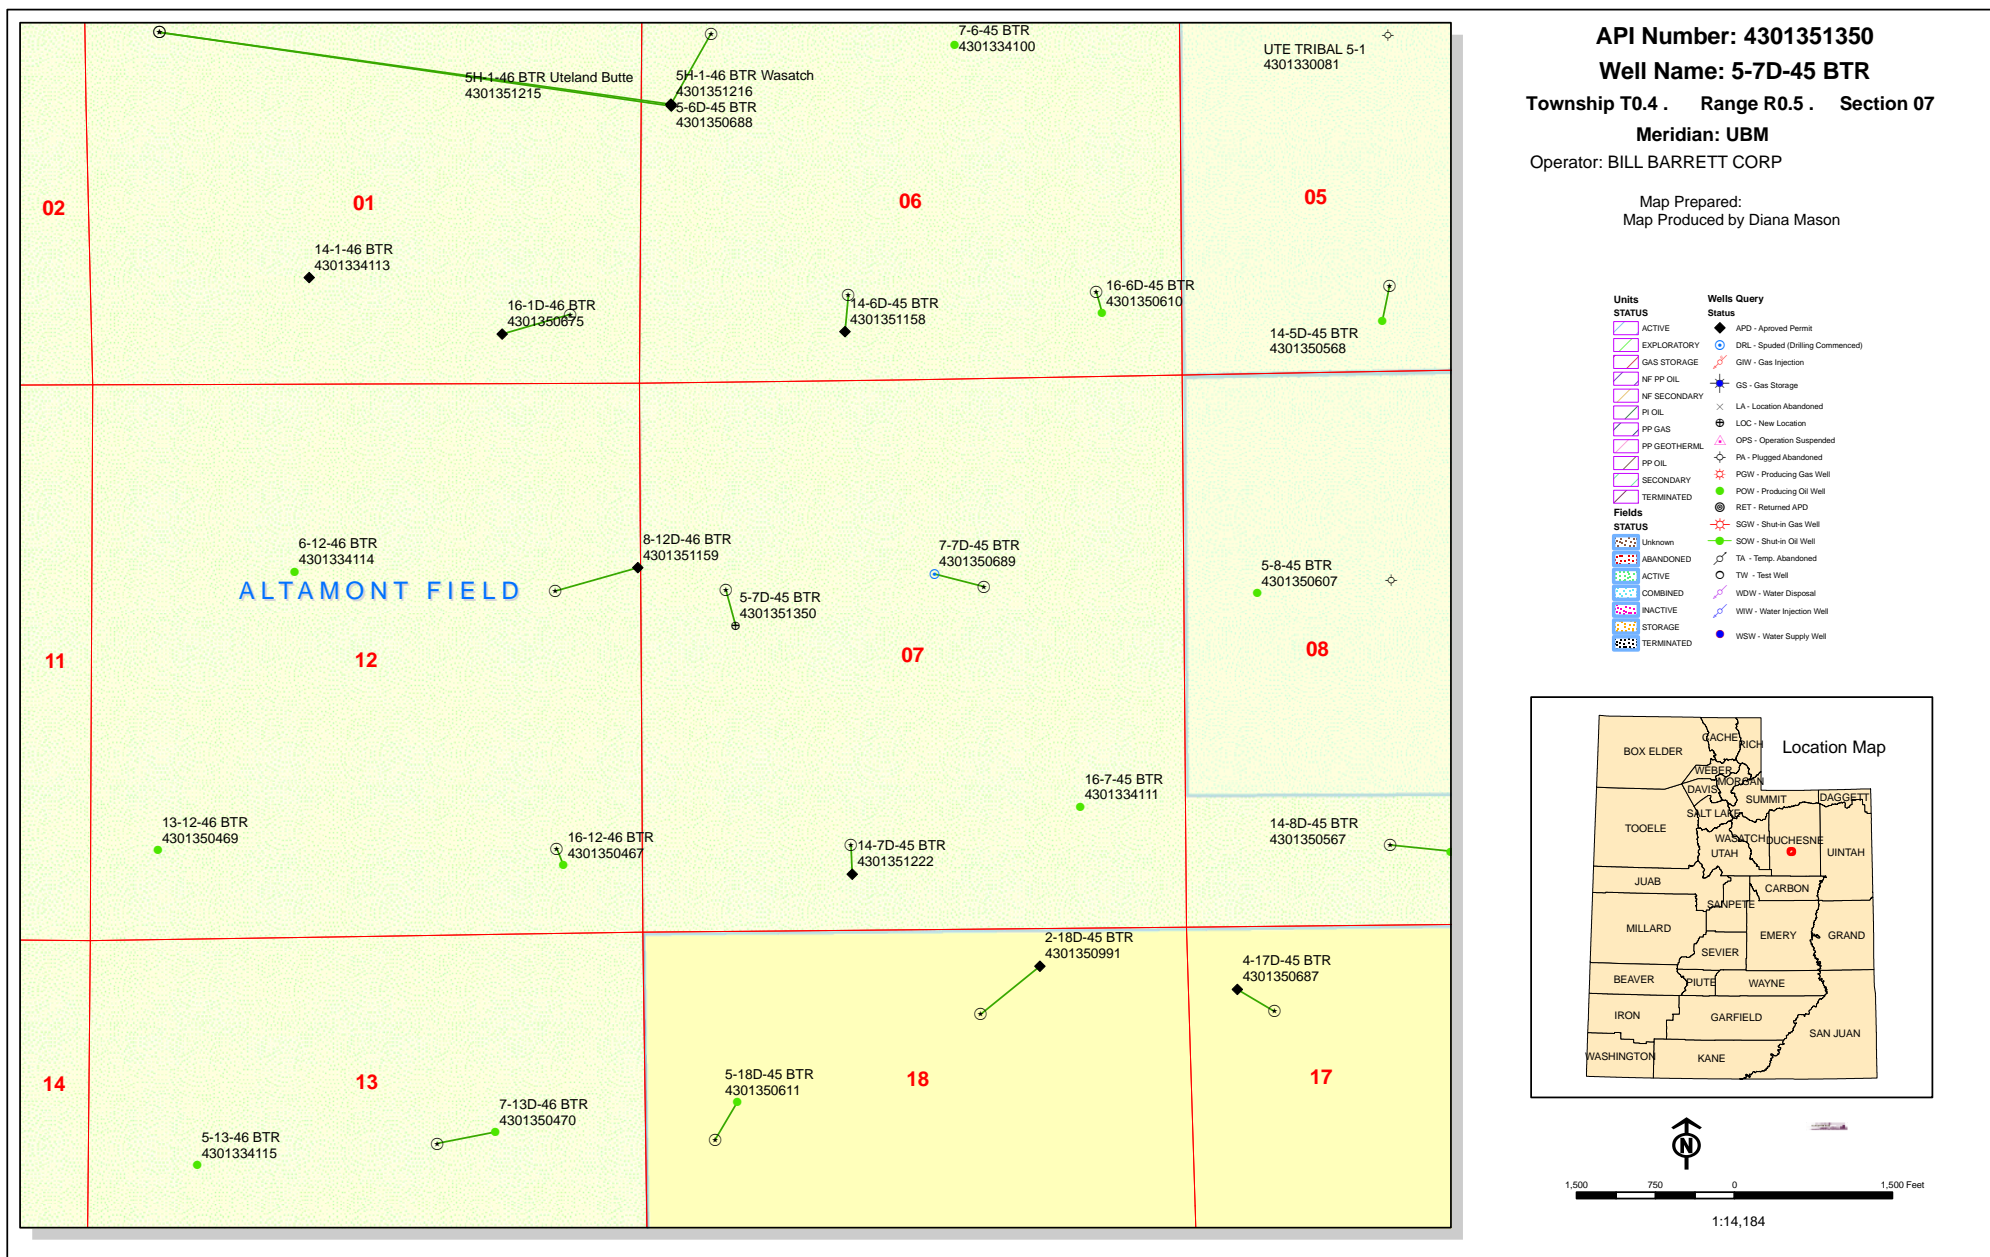

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 4/4/2012

API NO. ASSIGNED: 43013513500000

WELL NAME: 5-7D-45 BTR

OPERATOR: BILL BARRETT CORP (N2165)

PHONE NUMBER: 303 312-8172

CONTACT: Venessa Langmacher

PROPOSED LOCATION: SWNW 07 040S 050W

Permit Tech Review: ☒

SURFACE: 2321 FNL 0899 FWL

Engineering Review: ☐

BOTTOM: 1980 FNL 0810 FWL

Geology Review: ☒

COUNTY: DUCHESNE

LATITUDE: 40.14820

LONGITUDE: -110.49893

UTM SURF EASTINGS: 542679.00

NORTHINGS: 4444327.00

FIELD NAME: ALTAMONT

LEASE TYPE: 2 - Indian

LEASE NUMBER: 2OG0005608

PROPOSED PRODUCING FORMATION(S): GREEN RIVER-WASATCH

SURFACE OWNER: 2 - Indian

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

LOCATION AND SITING:

☒ PLAT☐ R649-2-3.☒ Bond: INDIAN - LPM8874725

Unit:

☐ Potash☐ R649-3-2. General☐ Oil Shale 190-5☐ Oil Shale 190-3☐ R649-3-3. Exception☐ Oil Shale 190-13☒ Drilling Unit☒ Water Permit: 43-180

Board Cause No: Cause 139-85

☐ RDCC Review:

Effective Date: 3/11/2010

☐ Fee Surface Agreement

Siting: 4 Prod LGRRV-WSTC Per Sectional Drilling Units

☐ Intent to Commingle☒ R649-3-11. Directional Drill

Commingle Approved

Comments: Presite Completed

Stipulations: 4 - Federal Approval - dmason
15 - Directional - dmason

RECEIVED: April 10, 2012



GARY R. HERBERT
Governor

GREGORY S. BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: 5-7D-45 BTR
API Well Number: 43013513500000
Lease Number: 2OG0005608
Surface Owner: INDIAN
Approval Date: 4/10/2012

Issued to:

BILL BARRETT CORP, 1099 18th Street Ste 2300, Denver, CO 80202

Authority:

Pursuant to Utah Code Ann. 40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 139-85. The expected producing formation or pool is the GREEN RIVER-WASATCH Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well - contact Carol Daniels at 801-538-5284

(please leave a voicemail message if not available)

OR

submit an electronic sundry notice (pre-registration required) via the Utah Oil &

Gas website
at <http://oilgas.ogm.utah.gov>

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) - due within 5 days of spudding the well
- Monthly Status Report (Form 9) - due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) - due prior to implementation
- Written Notice of Emergency Changes (Form 9) - due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) - due prior to implementation
- Report of Water Encountered (Form 7) - due within 30 days after completion
- Well Completion Report (Form 8) - due within 30 days after completion or plugging

Approved By:

A handwritten signature in black ink, appearing to read "John Rogers", written over a horizontal line.

For John Rogers
Associate Director, Oil & Gas

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

APR 10 2012

FORM APPROVED
OMB No. 1004-0136
Expires July 31, 2010APPLICATION FOR PERMIT TO DRILL OR REENTER
BLM

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. 1420H626297
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator BILL BARRETT CORPORATION Contact: VENESSA LANGMACHER E-Mail: vlangmacher@billbarrettcorp.com		7. If Unit or CA Agreement, Name and No.
3a. Address 1099 18TH STREET SUITE 2300 DENVER, CO 80202	3b. Phone No. (include area code) Ph: 303-312-8172 Fx: 303-291-0420	8. Lease Name and Well No. 5-7D-45 BTR
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SWNW Lot 2 2321FNL 899FWL 40.148294 N Lat, 110.498939 W Lon At proposed prod. zone SWNW Lot 2 1980FNL 810FWL 40.149231 N Lat, 110.499256 W Lon		9. API Well No. 43-013-51350
14. Distance in miles and direction from nearest town or post office* 7.9 MILES SOUTHWEST OF DUCHESNE, UT		10. Field and Pool, or Exploratory ALTAMONT
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any). 810'	16. No. of Acres in Lease 640.00	11. Sec., T., R., M., or Blk. and Survey or Area Sec 7 T4S R5W Mer UBM
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 2981'	19. Proposed Depth 8210 MD 8186 TVD	12. County or Parish DUCHESNE
21. Elevations (Show whether DF, KB, RT, GL, etc.) 6142 GL	22. Approximate date work will start 01/01/2013	13. State UT
23. Estimated duration 60 DAYS (D&C)		17. Spacing Unit dedicated to this well 640.00
20. BLM/BIA Bond No. on file LPM8874725		24. Attachments

RECEIVED
FEB 13 2013

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).

4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the authorized officer.

DIV. OF OIL, GAS & MINING

25. Signature (Electronic Submission)	Name (Printed/Typed) VENESSA LANGMACHER Ph: 303-312-8172	Date 04/04/2012
Title SENIOR PERMIT ANALYST		
Approved by (Signature) 	Name (Printed/Typed) Jerry Kenczka	Date JAN 22 2013
Title Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE	

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #134735 verified by the BLM Well Information System
For BILL BARRETT CORPORATION, sent to the Vernal
Committed to AFMSS for processing by LESLIE ROBINSON on 04/11/2012 ()


UDOGM

NOTICE OF APPROVAL
CONDITIONS OF APPROVAL ATTACHED

** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED **

107511010 AG

mch 10/10/12



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE
170 South 500 East
VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Bill Barrett Corporation
Well No: 5-7D-45 BTR
API No: 43-013-51350

Location: LOT 2, T4S, R5W, SEC.7
Lease No: 14-20-H62-6297
Agreement: N/A

OFFICE NUMBER: (435) 781-4400

OFFICE FAX NUMBER: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Construction Activity (Notify Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist)	- The Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist shall be notified at least 48 hours in advance of any construction activity. The Ute Tribal office is open Monday through Thursday.
Construction Completion (Notify Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist)	- Upon completion of the pertinent APD/ROW construction, notify the Ute Tribe Energy & Minerals Dept. for a Tribal Technician to verify the Affidavit of Completion. Notify the BLM Environmental Scientist prior to moving on the drilling rig.
Spud Notice (Notify BLM Petroleum Engineer)	- Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify BLM Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to running casing and cementing all casing strings to: blm_ut_vn_opreport@blm.gov
BOP & Related Equipment Tests (Notify BLM Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify BLM Petroleum Engineer)	- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

Additional Stipulations:

- The operator will strictly adhere to all Stipulations and Conditions of Approval associated with the Utah Division of Wildlife Resources (UDWR) Site-Specific Environmental Assessment DUC-1002EA-122.
- Any deviation of submitted APD's and ROW applications the operator will notify the UDWR in writing and will receive written authorization of any such change with appropriate authorization.
- The operator will implement "Safety and Emergency Plan." The operator's safety director will ensure its compliance.
- All operator employees and/or authorized personnel (sub-contractors) in the field will have approved applicable APD's and ROW permits/authorizations on their person(s) during all phases of construction.
- All vehicular traffic, personnel movement, construction/restoration operations should be confined to the area examined and approved, and to the existing roadways and/or evaluated access routes.
- All personnel should refrain from collecting artifacts, any paleontological fossils, and from disturbing any significant cultural resources in the area.
- The personnel from the UDWR should be notified should cultural remains from subsurface deposits be exposed or identified during construction. All construction will cease.
- All production facilities are to be painted Beetle to match to the surrounding landscape. See new environmental color chart for specific color. This was decided on the onsite and agreed to by DWR representatives and BBC.
- All pipelines need to be buried to adhere to DWR wildlife guidelines for mitigation in crucial winter range for deer and elk.

General Conditions of Approval:

- A 30' foot corridor right-of-way shall be approved. Upon completion of each pipeline in corridor, they shall be identified and filed with the Ute Tribe.
- The Ute Tribe Energy & Minerals Department is to be notified, in writing 48 hours prior to construction of pipelines.
- Construction Notice shall be given to the department on the Ute Tribe workdays, which are Monday through Thursday. The Company understands that they may be responsible for costs incurred by the Ute Tribe after hours.
- The Company shall inform contractors to maintain construction of pipelines within the approved ROW's.

- The Company shall assure the Ute Tribe that "ALL CONTRACTORS, INCLUDING SUB-CONTRACTORS, LEASING CONTRACTORS, AND ETC." have acquired a current and valid Ute Tribal Business License and have "Access Permits" prior to construction, and will have these permits in all vehicles at all times.
- You are hereby notified that working under the "umbrella" of a company does not allow you to be in the field, and can be subject to those fines of the Ute Tribe Severance Tax Ordinance.
- Any deviation of submitted APD's and ROW applications the Companies will notify the Ute Tribe and BIA in writing and will receive written authorization of any such change with appropriate authorization.
- Bill Barrett Corporation will implement a "Safety and Emergency Plan." The Company's safety director will ensure its compliance.
- All Company employees and/or authorized personnel (sub-contractors) in the field will have approved applicable APD's, COA's, and/or ROW permits/authorizations on their person(s) during all phases of construction.
- All vehicular traffic, personnel movement, construction/restoration operations should be confined to the area examined and approved, and to the existing roadways and/or evaluated access routes.
- The personnel from the Ute Tribe Energy & Minerals Department should be notified should cultural remains from subsurface deposits be exposed or identified during construction. All construction will cease.
- Upon completion of Application for Corridor Right-Way, the company will notify the Ute Tribe Energy & Minerals Department, so that a Tribal Technician can verify Affidavit of Completion.

**DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

SITE SPECIFIC DOWNHOLE COAs:

- A CBL shall be run from TD to TOC in the Production Casing.
- The minimum TOC for the 5.5 inch casing shall be 1900 feet.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person

making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well by CD (compact disc). This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- For information regarding production reporting, contact the Office of Natural Resources Revenue (ONRR) at www.ONRR.gov.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.

- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.
- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or

abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: 20G0005608
1. TYPE OF WELL Oil Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: Uintah
2. NAME OF OPERATOR: BILL BARRETT CORP		7. UNIT or CA AGREEMENT NAME:
3. ADDRESS OF OPERATOR: 1099 18th Street Ste 2300 , Denver, CO, 80202		8. WELL NAME and NUMBER: 5-7D-45 BTR
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2321 FNL 0899 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNW Section: 07 Township: 04.0S Range: 05.0W Meridian: U		9. API NUMBER: 43013513500000
PHONE NUMBER: 303 312-8164 Ext		9. FIELD and POOL or WILDCAT: ALTAMONT
COUNTY: DUCHESNE		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR	
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME	
<input checked="" type="checkbox"/> SPUD REPORT Date of Spud: 3/2/2013	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE	
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION	
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK	
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON	
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL	
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

 This well was spud on 3/2/2013 at 3:00 pm by Triple A Drilling, Rig #TA 4037, Rig Type Soilmec SR/30. Continuous drilling is scheduled to commence approximately 3/22/2013.

Accepted by the
 Utah Division of
 Oil, Gas and Mining
FOR RECORD ONLY
 March 04, 2013

NAME (PLEASE PRINT) Venessa Langmacher	PHONE NUMBER 303 312-8172	TITLE Senior Permit Analyst
SIGNATURE N/A	DATE 3/4/2013	

3/19/13

Patt 506 rig move - caroldaniels@utah.gov - State of Utah Mail

Search Images Mail Drive Calendar Sites Groups Contacts Mobile More -



SWNW S-07 TOYS RO5W 4301351350

caroldaniels@utah.gov

Mail

More 17 of 175

COMPOSE

Patt 506 rig move

Inbox x

People (8)

Inbox (34)

Starred

Important

Sent Mail


Drafts (1)

Cabinet

Follow up

Misc

Notes




Search people...

Don Staley
alexishuefner
Diana Mason
Anadarko - Xtrem...
barbara_nicol
Brady Riley Inv...
Dustin Doucet
Rig - SST 54 (...
RLANDRIG008

pat506

Mar 17 (2 days ago)



pat506

pat506@billbarrettcorp.com

Show details

Ladies and Gentlemen,
Patterson Rig 506 will be moving from the 8-12D-46 BTR to the 5-7D-45 BTR
starting at 8:00 am on 3/18/2013 thru 3/21/2013.
If you have any questions please contact me.
Thank you,

Monte C Long
Bill Barret Corporation
Patterson 506
435-828-6095
pat506@billbarrettcorp.com



Click here to [Reply](#), [Reply to all](#), or [Forward](#)

0% full
Using 0.1 GB of your 25 GB

©2013 Google - [Terms of Service](#) -
[Privacy Policy](#) - [Program Policies](#)

Last account activity: 22 minutes ago
[Details](#)

Powered by **Google**

RECEIVED

MAR 19 2013

DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: 20G0005608
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: Uintah
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Oil Well		8. WELL NAME and NUMBER: 5-7D-45 BTR
2. NAME OF OPERATOR: BILL BARRETT CORP		9. API NUMBER: 43013513500000
3. ADDRESS OF OPERATOR: 1099 18th Street Ste 2300 , Denver, CO, 80202		9. FIELD and POOL or WILDCAT: ALTAMONT
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2321 FNL 0899 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNW Section: 07 Township: 04.0S Range: 05.0W Meridian: U		COUNTY: DUCHESNE
		STATE: UTAH

11.

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input checked="" type="checkbox"/> DRILLING REPORT Report Date: 3/1/2013	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Attached is the March 2013 Drilling Activity for this well.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
 April 05, 2013

NAME (PLEASE PRINT) Brady Riley	PHONE NUMBER 303 312-8115	TITLE Permit Analyst
SIGNATURE N/A		DATE 4/5/2013

**5-7D-45 BTR 3/18/2013 06:00 - 3/19/2013 06:00**

API/UWI	State/Province	County	Field Name	Well Status	Total Depth (ftKB)	Primary Job Type
	UT	DUCHESNE	Black Tail Ridge	COMPLETION	8,206.0	Drilling & Completion

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	12.00	18:00	1	RIGUP & TEARDOWN	MOVE RIG TO 5-7D-45 BTR & RIG UP
18:00	12.00	06:00	1	RIGUP & TEARDOWN	WAIT ON DAYLIGHT

5-7D-45 BTR 3/19/2013 06:00 - 3/20/2013 06:00

API/UWI	State/Province	County	Field Name	Well Status	Total Depth (ftKB)	Primary Job Type
	UT	DUCHESNE	Black Tail Ridge	COMPLETION	8,206.0	Drilling & Completion

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	12.00	18:00	1	RIGUP & TEARDOWN	RIG UP TRUCKS RELEASED @ 10AM/DERRICK IN AIR @ 12:30 PM TRANSFERRING 9.8# MUD FROM RIG M-22
18:00	11.50	05:30	1	RIGUP & TEARDOWN	RIG UP FLOOR, GASBUSTER, FLARE LINES, CUNDUTOR, FLOW LINE, TURN BUCKELS, SCAFLTING, STAIRS, PASON LINES, POWER LINES KELLY/SPINNERS PRE SUD INSPECTION REPAIRS TO PREMIX TEST FOR LEAKS
05:30	0.50	06:00	20	DIRECTIONAL WORK	PICK UP DIRECTIONAL TOOLS, REAMERS, SHOCK SUB,

5-7D-45 BTR 3/20/2013 06:00 - 3/21/2013 06:00

API/UWI	State/Province	County	Field Name	Well Status	Total Depth (ftKB)	Primary Job Type
	UT	DUCHESNE	Black Tail Ridge	COMPLETION	8,206.0	Drilling & Completion

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	2.50	08:30	20	DIRECTIONAL WORK	DIRECTIONAL WORK PICK UP STABS MONELS, SCRIBE AND M/U BIT
08:30	8.00	16:30	2	DRILL ACTUAL	STEERABLE DRILLING F/ 90 - 562' (502' @ 62'/ Hr AVG). WOB 14k, GPM 668, MTR RPM 95, RPM 45 SLIDING 0%, ROTOATE 100%.
16:30	0.50	17:00	7	LUBRICATE RIG	RIG SERVICE
17:00	13.00	06:00	2	DRILL ACTUAL	STEERABLE DRILLING F/ 562 - 1336' (774' @ 60'/ Hr AVG). WOB 20k, GPM 552, MTR RPM 95, RPM 45 SLIDING 10%, ROTOATE 90%.

5-7D-45 BTR 3/21/2013 06:00 - 3/22/2013 06:00

API/UWI	State/Province	County	Field Name	Well Status	Total Depth (ftKB)	Primary Job Type
	UT	DUCHESNE	Black Tail Ridge	COMPLETION	8,206.0	Drilling & Completion

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	11.50	17:30	2	DRILL ACTUAL	STEERABLE DRILLING F/ 1336 - 1908' (572' @ 49'/ Hr AVG). WOB 20k, GPM 552, MTR RPM 95, RPM 45 SLIDING 60%, ROTOATE 40%.
17:30	0.50	18:00	7	LUBRICATE RIG	RIG SERVICE
18:00	5.50	23:30	2	DRILL ACTUAL	STEERABLE DRILLING F/ 1908' - 2122' (214' @ 38'/ Hr AVG). WOB 20k, GPM 552, MTR RPM 95, RPM 45 SLIDING 80%, ROTOATE 20%.
23:30	1.00	00:30	5	COND MUD & CIRC	PUMPED TWO SWEEPS AROUND AND CIRCULATE FOR SHORT TRIP
00:30	1.50	02:00	6	TRIPS	BLOW DOWN KELLY WIPER TRIP F/ 2122'-925'-2122' HOLE DISPLACEMET 22.3 BBLS THEORETICAL 22.4 BBLS
02:00	0.50	02:30	5	COND MUD & CIRC	CIRCULATE BTMS UP PUMP
02:30	1.50	04:00	6	TRIPS	TRIP OUT OF HOLE F/ 2122'-150' HOLE DISPLACEMT 49.3 BBLS THEORETICAL 49.6 BBLS
04:00	1.00	05:00	21	OPEN	HOLD S/M WITH FRANKS (HAD THEM RE STRING FAST LINE) R/U LAYDOWN MACHINE TO LAY DOWN DIRECTIONAL TOOLS AND 8" DC REAMERS, SHOCK SUB
05:00	1.00	06:00	20	DIRECTIONAL WORK	LAY DOWN DIRECTIONAL TOOLS AND 8" DC REAMERS, SHOCK SUB, NMDC, MOTOR, BREAK BIT

5-7D-45 BTR 3/22/2013 06:00 - 3/23/2013 06:00

API/UWI	State/Province	County	Field Name	Well Status	Total Depth (ftKB)	Primary Job Type
	UT	DUCHESNE	Black Tail Ridge	COMPLETION	8,206.0	Drilling & Completion

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	1.50	07:30	20	DIRECTIONAL WORK	HELD S/M WITH FRANKS ON LAY DOWN DIRECTIONAL TOOLS AND RUNNING CASING, FINISH LAYING DOWN DIRECTIONAL TOOLS.
07:30	5.50	13:00	12	RUN CASING & CEMENT	RUN CASING (J-55 36# LTC 9 5/8) WITH FRANKS F/0'-2122' BREAK CIRCULATION @ 1580'
13:00	1.50	14:30	12	RUN CASING & CEMENT	CIRCULATE HOLE CLEAN FOR CEMENT JOB & RIG DOWN CASING CREW
14:30	3.50	18:00	12	RUN CASING & CEMENT	HELD S/M WITH HALLIBURTON RIG UP CEMENT EQUIPMENT W.O.C

**Time Log**

Start Time	Dur (hr)	End Time	Code	Category	Com
18:00	3.00	21:00	12	RUN CASING & CEMENT	CEMENT WITH HALLIBURTON FILL LINES TEST TO 5000 PSI PUMP 20 BBLS FRESH WATER 40 BBLS SUPER FLUSH @ 10 # PUMP 20 BBLS FRESH WATER PUMP LEAD CEMENT (180 BBLS @ 11# 3.16 Y 19.48 WR 320 SKS) PUMP TAIL CEMENT (56 BBLS @ 14# 1.33 Y 6.31 WR 240 SKS) DROP PLUG DISPLACE FIRST 10 BBLS WATER DISPLACE 161 BBLS MUD @ 9.5# LAST 20 BBLS WATER BUMP PLUG @ 1100 PSI 500 OVER 90 BBLS BACK TO SURFACE
21:00	1.50	22:30	12	RUN CASING & CEMENT	W.O.C FELL 15" RIG UP 1' LINE FOR TOP JOB TOP OUT WITH 20 BBLS 15.8# 1.17 Y
22:30	4.50	03:00	12	RUN CASING & CEMENT	CUT OFF LANDING JOINT AND WELD ON WELL HEAD WITH TERRYS MACHINE
03:00	3.00	06:00	14	NIPPLE UP B.O.P	NIPPLE UP B.O.Ps

5-7D-45 BTR 3/23/2013 06:00 - 3/24/2013 06:00

API/UWI	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status COMPLETION	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------	----------------------	--------------------	--------------------------------	---------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	8.00	14:00	15	TEST B.O.P	HELD SAFTEY MEETING TEST B.O.Ps LOW 250 HIGH 5000 LOWER KELLY VALVE, UPPER KELLY VALVE, DART VALVE PIPE RAMS AND INSIDE VLAVES (PIPE RAMS, HCR & OUT SIDE KILL LINE) (PIPE RAMS, CHOKE LINE, CHECK VALVE UPRIGHT GAGE VALVE & INSIDE MANIFOLD VALVES) BLIND RAMS, CHOKE LINES & MANIFOLD VALVES TEST ANNULAR, BILIND RAMS AND SUPER CHOKE LOW 5 MINS HIGH 10 MINS CASING 1500 PSI 30 MINS (TESTERS NAME & COMPANY C MASSEY WITH B&C QUICK TEST)
14:00	0.50	14:30	21	OPEN	INSTALL WARE BUSHING
14:30	2.50	17:00	20	DIRECTIONAL WORK	PICK UP DIRECTIONAL TOOLS WITH TOTAL M/U BIT SCRIBE PICK UP MONELS, REAMERS, MWD, MUD MOTOR
17:00	1.00	18:00	6	TRIPS	TRIP IN HOLE F/ 0-2,050'
18:00	1.00	19:00	3	TRIPS	DRILL OUT CEMENT, FLOAT & SHOE F/ 2,050'-2,122'
19:00	0.50	19:30	2	DRILL ACTUAL	DRILL 20' OF NEW FORMATION F/ 2,122' - 2,142'
19:30	1.00	20:30	21	OPEN	CIRCULATE BTMS @ 1562 STKS @ 79 SPM EMW TEST 178 PSI 10.5 EMW
20:30	9.50	06:00	2	DRILL ACTUAL	STEERABLE DRILLING F/ 2,142' -2,724 ' (582' @ 64'/ Hr AVG). WOB 15k, GPM 442, MTR RPM 66, RPM 45 SLIDING 50%, ROTOATE 50%.

5-7D-45 BTR 3/24/2013 06:00 - 3/25/2013 06:00

API/UWI	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status COMPLETION	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------	----------------------	--------------------	--------------------------------	---------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	10.50	16:30	2	DRILL ACTUAL	STEERABLE DRILLING F/ 2,724' -3,454' (730' @ 69'/ Hr AVG). WOB 15k, GPM 442, MTR RPM 66, RPM 45 SLIDING 50%, ROTOATE 50%.
16:30	0.50	17:00	7	LUBRICATE RIG	RIG SERVICE FUNCTION TEST PIPE RAMS
17:00	1.00	18:00	2	DRILL ACTUAL	STEERABLE DRILLING F/ 3,454' -3,570' (116' @ 100'/ Hr AVG). WOB 15k, GPM 442, MTR RPM 66, RPM 45 SLIDING 50%, ROTOATE 50%.
18:00	1.00	19:00	5	COND MUD & CIRC	LOST RETURNS@ 3,551' @ 19:11 CIRCULATE AND BUILD VOLUME AND MIX LCM GOT RETURNS BACK
19:00	11.00	06:00	2	DRILL ACTUAL	STEERABLE DRILLING F/ 3,570' -4,183' (613' @ 55'/ Hr AVG). WOB 15k, GPM 442, MTR RPM 66, RPM 45 SLIDING 50%, ROTOATE 50%.

5-7D-45 BTR 3/25/2013 06:00 - 3/26/2013 06:00

API/UWI	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status COMPLETION	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------	----------------------	--------------------	--------------------------------	---------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	11.50	17:30	2	DRILL ACTUAL	STEERABLE DRILLING F/ 4,183' -4,722' (539' @ 46'/ Hr AVG). WOB 15k, GPM 442, MTR RPM 66, RPM 45 SLIDING 50%, ROTOATE 50%.
17:30	0.50	18:00	7	LUBRICATE RIG	RIG SERVICE FUNTION TEST PIPE RAMS
18:00	12.00	06:00	2	DRILL ACTUAL	STEERABLE DRILLING F/4,722' -5,356' (634' @ 52'/ Hr AVG). WOB 16k, GPM 442, MTR RPM 66, RPM 45 SLIDING 50%, ROTOATE 50%. (SEEPAGE @ 4,832-4,981)

5-7D-45 BTR 3/26/2013 06:00 - 3/27/2013 06:00

API/UWI	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status COMPLETION	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------	----------------------	--------------------	--------------------------------	---------------------------	-------------------------------	-------------------------------------------

**Time Log**

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	9.50	15:30	9.5	DRILL ACTUAL	STEERABLE DRILLING F/ 5,356' -5,705' (349' @ 36'/ Hr AVG). WOB 19k, GPM 442, MTR RPM 66, RPM 45 SLIDING 50%, ROTOATE 50%.
15:30	0.50	16:00	7	LUBRICATE RIG	RIG SERVICE FUNCTION TEST PIPE RAMS
16:00	3.00	19:00	2	DRILL ACTUAL	STEERABLE DRILLING F/5,705' -5,864' (159' @ 53'/ Hr AVG). WOB 19.5k, GPM 442, MTR RPM 66, RPM 45 SLIDING 20%, ROTOATE 80%.
19:00	0.50	19:30	21	OPEN	CLEAN OUT SHALE PIT
19:30	10.50	06:00	2	DRILL ACTUAL	STEERABLE DRILLING F/5,864' -6,372' (508' @ 48'/ Hr AVG). WOB 19.5k, GPM 442, MTR RPM 66, RPM 45 SLIDING 20%, ROTOATE 80%.

5-7D-45 BTR 3/27/2013 06:00 - 3/28/2013 06:00

API/UWI	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status COMPLETION	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------	----------------------	--------------------	--------------------------------	---------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	10.50	16:30	2	DRILL ACTUAL	STEERABLE DRILLING F/ 6,372' -6,657' (285' @ 27'/ Hr AVG). WOB 19.5k, GPM 442, MTR RPM 66, RPM 45 SLIDING 40%, ROTOATE 60%.
16:30	0.50	17:00	7	LUBRICATE RIG	RIG SERVICE FUNCTION TEST PIPE RAMS
17:00	13.00	06:00	2	DRILL ACTUAL	STEERABLE DRILLING F/ 6,657' -7,133' (476' @ 36'/ Hr AVG). WOB 19.5k, GPM 442, MTR RPM 66, RPM 45 SLIDING 80%, ROTOATE 20%.

5-7D-45 BTR 3/28/2013 06:00 - 3/29/2013 06:00

API/UWI	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status COMPLETION	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------	----------------------	--------------------	--------------------------------	---------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	11.50	17:30	2	DRILL ACTUAL	STEERABLE DRILLING F/ 7,133' -7,609' (476' @ 41'/ Hr AVG). WOB 24K, GPM 442, MTR RPM 66, RPM 45 SLIDING 60%, ROTOATE 40%. SLIGHT LOSSES @ 7,474'
17:30	0.50	18:00	7	LUBRICATE RIG	RIG SERVICE FUNCTION TEST PIPE RAMS
18:00	12.00	06:00	2	DRILL ACTUAL	STEERABLE DRILLING F/ 7,609' -8,116' (507' @ 42'/ Hr AVG). WOB 24K, GPM 442, MTR RPM 66, RPM 45 SLIDING 30%, ROTOATE 70%.

5-7D-45 BTR 3/29/2013 06:00 - 3/30/2013 06:00

API/UWI	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status COMPLETION	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------	----------------------	--------------------	--------------------------------	---------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	1.00	07:00	2	DRILL ACTUAL	STEERABLE DRILLING F/ 8,116' -8,206' (90' @ 90'/ Hr AVG). WOB 24K, GPM 442, MTR RPM 66, RPM 45 SLIDING 100%, ROTOATE 0%.
07:00	1.50	08:30	5	COND MUD & CIRC	CIRCULATE SWEEPS AROUND PUMP SLUG
08:30	1.00	09:30	6	TRIPS	TRIP OUT F/ 8,206'-6,927' HOLE NOT TAKING PROPER DISPLACEMENT KELLY UP
09:30	1.00	10:30	5	COND MUD & CIRC	BREAK CIRC. CIRC MUD
10:30	1.50	12:00	6	TRIPS	FINISH SHORT TRIP F/ 6,927'-5,804' TRIP BACK TO BOTTOM DISPLACEMENT 40.1 BBLS THEROETICAL 40.6 BBLS
12:00	1.50	13:30	5	COND MUD & CIRC	BREAK CIRCULATION CIRCULATE BOTTOMS UP @ 130 SPM @ 5912 TOTAL STROKES PUMP DRY JOB
13:30	4.50	18:00	6	TRIPS	TRIP OUT OF THE HOLE F/ 8,206'-120' DISPLACEMENT 63.2 BBLS THEROETICAL 59.8 BBLS
18:00	1.00	19:00	20	DIRECTIONAL WORK	LAY DOWN DIRECTIONAL TOOLS STABES, MWD, MONELS & BREAK BIT
19:00	5.50	00:30	11	WIRELINE LOGS	S/M WITH HALLBUTRTON ON RIGGING UP AND RUNNING OPEN HOLE LOGS LOG TAGED UP @ 8,202' RIG DOWN LOGGERS
00:30	5.50	06:00	6	TRIPS	TRIP IN HOLE WITH WIPER BIT F/ 0-6,807' FILL PIPE AND BREAK CIRCULATION @ 2,126'-4,497'-6807'

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: 20G0005608
1. TYPE OF WELL Oil Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: Uintah
2. NAME OF OPERATOR: BILL BARRETT CORP		7. UNIT or CA AGREEMENT NAME:
3. ADDRESS OF OPERATOR: 1099 18th Street Ste 2300 , Denver, CO, 80202		8. WELL NAME and NUMBER: 5-7D-45 BTR
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2321 FNL 0899 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNW Section: 07 Township: 04.0S Range: 05.0W Meridian: U		9. API NUMBER: 43013513500000
PHONE NUMBER: 303 312-8164 Ext		9. FIELD and POOL or WILDCAT: ALTAMONT
COUNTY: DUCHESNE		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR	
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE	
<input checked="" type="checkbox"/> DRILLING REPORT Report Date: 3/1/2013	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION	
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK	
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON	
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL	
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

spud in March 2013

Accepted by the
 Utah Division of
 Oil, Gas and Mining
FOR RECORD ONLY
 April 05, 2013

NAME (PLEASE PRINT) Brady Riley	PHONE NUMBER 303 312-8115	TITLE Permit Analyst
SIGNATURE N/A	DATE 4/5/2013	

BLM - Vernal Field Office - Notification Form

Operator Bill Barrett Corp. Rig Name/# Patterson Rig 506
Submitted By Ricky kuhr Phone Number 435-828-6095
Well Name/Number 5-7D-45 BTR
Qtr/Qtr SW/NW Section 7 Township 4S Range 5W
Lease Serial Number 1420H626297
API Number 43-013-51350-00X1

Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string.

Date/Time 3/20/2013 7:30 AM ☒ PM ☐

Casing – Please report time casing run starts, not cementing times.

- ☒ Surface Casing
- ☐ Intermediate Casing
- ☐ Production Casing
- ☐ Liner
- ☐ Other

Date/Time 2/21/2013 4:30 AM ☐ PM ☒

BOPE

- ☒ Initial BOPE test at surface casing point
- ☐ BOPE test at intermediate casing point
- ☐ 30 day BOPE test
- ☐ Other

RECEIVED
MAR 20 2013
DIV. OF OIL, GAS & MINING

Date/Time 3/22/2013 9:00 AM ☒ PM ☐

Remarks Any changes to the time frame will be e-mailed in a prompt amount of time

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: 20G0005608
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: Uintah
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Oil Well		8. WELL NAME and NUMBER: 5-7D-45 BTR
2. NAME OF OPERATOR: BILL BARRETT CORP		9. API NUMBER: 43013513500000
3. ADDRESS OF OPERATOR: 1099 18th Street Ste 2300 , Denver, CO, 80202		9. FIELD and POOL or WILDCAT: ALTAMONT
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2321 FNL 0899 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNW Section: 07 Township: 04.0S Range: 05.0W Meridian: U		COUNTY: DUCHESNE
		STATE: UTAH

11.

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR	
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE	
<input checked="" type="checkbox"/> DRILLING REPORT Report Date: 4/30/2013	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION	
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK	
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON	
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL	
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Attached is the April 2013 Drilling Activity for this well.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
 May 03, 2013

NAME (PLEASE PRINT) Brady Riley	PHONE NUMBER 303 312-8115	TITLE Permit Analyst
SIGNATURE N/A		DATE 5/3/2013

**5-7D-45 BTR 4/5/2013 06:00 - 4/6/2013 06:00**

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status COMPLETION	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	---------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	24.00	06:00	GOP	General Operations	CHECK PRESSURE. ND 11" NIGHT CAP. MAKE FINAL CUT. NU 7" 5K TBG HEAD. PRES TEST VOID AND SEALS.

5-7D-45 BTR 4/8/2013 06:00 - 4/9/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status COMPLETION	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	---------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	24.00	06:00	LOGG	Logging	MIRU SLB. RUN GR/JB TO TAG AT 8090', (FC 8116') HAVE 26' FILL. RUN CBL/CCL/GR LOG. SHORT JOINTS AT 5620'-5641', 6860'-6882', 7555'-7577'. MAX TEMP 203*. REPEAT PASS 8050-7850'. CMT BOND SHOWS FOOD CMT 8090'-7100', FAIR 7100'-6700', RATTY 6700'-6600', FAIR 6600'-6350', RATTY 6350'-6200', FAIR 6200'-5600', RATTY 5600'-5150', FAIR 5150'-4800', VERY POOR 4200'-2084'. TOC 2084'. RAN W/ PRESSURE. RDMO SLB AND FRONTIER.

5-7D-45 BTR 4/24/2013 06:00 - 4/25/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status COMPLETION	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	---------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	24.00	06:00	GOP	General Operations	HSM. CHECK PRESSURE. ND NIGHT CAP. NU FRAC MANDREL. NU 5" 10K FRAC VALVES. NU 5" 10K X 7" 5K DSA. SHUT WELL IN.

5-7D-45 BTR 4/27/2013 06:00 - 4/28/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status COMPLETION	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	---------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	24.00	06:00	GOP	General Operations	MIRU PINNACLE WIRELINE WITH SLB CRANE. HAVING ISSUES WITH CONNECTION TO TOOLS. UNABLE TO RIH. WORKING ON UNIT

5-7D-45 BTR 4/28/2013 06:00 - 4/29/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status COMPLETION	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	---------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	24.00	06:00	GOP	General Operations	ABLE TO GET TOOLS WORKING. PU ASSY AND RIH TO MONITORING DEPTH. BTM OF TOOLS AT 8028'. PERF STG 1 ON 8-12D-46. ABLE TO READ.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
		5. LEASE DESIGNATION AND SERIAL NUMBER: 20G0005608
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: Uintah
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Oil Well		8. WELL NAME and NUMBER: 5-7D-45 BTR
2. NAME OF OPERATOR: BILL BARRETT CORP		9. API NUMBER: 43013513500000
3. ADDRESS OF OPERATOR: 1099 18th Street Ste 2300 , Denver, CO, 80202	PHONE NUMBER: 303 312-8134 Ext	9. FIELD and POOL or WILDCAT: ALTAMONT
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2321 FNL 0899 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNW Section: 07 Township: 04.0S Range: 05.0W Meridian: U		COUNTY: DUCHESNE
		STATE: UTAH

11.

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input checked="" type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 5/8/2013			
<input type="checkbox"/> SPUD REPORT Date of Spud:			
<input type="checkbox"/> DRILLING REPORT Report Date:			

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

This well had first gas sales on 5/8/2013 and first oil sales on
5/10/2013.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
 May 17, 2013

NAME (PLEASE PRINT) Venessa Langmacher	PHONE NUMBER 303 312-8172	TITLE Senior Permit Analyst
SIGNATURE N/A		DATE 5/13/2013

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: 1420H626297
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: Uintah
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Oil Well		8. WELL NAME and NUMBER: 5-7D-45 BTR
2. NAME OF OPERATOR: BILL BARRETT CORP		9. API NUMBER: 43013513500000
3. ADDRESS OF OPERATOR: 1099 18th Street Ste 2300 , Denver, CO, 80202		9. FIELD and POOL or WILDCAT: ALTAMONT
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2321 FNL 0899 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNW Section: 07 Township: 04.0S Range: 05.0W Meridian: U		COUNTY: DUCHESNE
		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 5/1/2013	<input type="checkbox"/> ALTER CASING	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CASING REPAIR	
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	
	<input type="checkbox"/> CHANGE TUBING	
	<input type="checkbox"/> CHANGE WELL STATUS	
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	
	<input type="checkbox"/> DEEPEN	
	<input type="checkbox"/> FRACTURE TREAT	
	<input type="checkbox"/> OPERATOR CHANGE	
	<input type="checkbox"/> PLUG AND ABANDON	
	<input type="checkbox"/> PRODUCTION START OR RESUME	
	<input type="checkbox"/> RECLAMATION OF WELL SITE	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	
	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	
	<input type="checkbox"/> TUBING REPAIR	
	<input type="checkbox"/> VENT OR FLARE	
	<input type="checkbox"/> WATER SHUTOFF	
	<input type="checkbox"/> SI TA STATUS EXTENSION	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	
	<input checked="" type="checkbox"/> OTHER	
	OTHER: <input type="text" value="Tribal Lease"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. The tribal lease has been earned for this well. The new lease number is 1420H626297.		
Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY May 22, 2013		
NAME (PLEASE PRINT) Venessa Langmacher	PHONE NUMBER 303 312-8172	TITLE Senior Permit Analyst
SIGNATURE N/A	DATE 5/22/2013	

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Dry <input type="checkbox"/> Other b. Type of Completion <input checked="" type="checkbox"/> New Well <input type="checkbox"/> Work Over <input type="checkbox"/> Deepen <input type="checkbox"/> Plug Back <input type="checkbox"/> Diff. Resvr. Other _____				5. Lease Serial No. 1420H626297	
2. Name of Operator BILL BARRETT CORPORATION Contact: VENESSA LANGMACHER E-Mail: vlangmacher@billbarrettcorp.com				6. If Indian, Allottee or Tribe Name	
3. Address 1099 18TH STREET SUITE 2300 DENVER, CO 80202			3a. Phone No. (include area code) Ph: 303-312-8172		7. Unit or CA Agreement Name and No.
4. Location of Well (Report location clearly and in accordance with Federal requirements)* At surface SWNW 2321FNL 899FWL At top prod interval reported below SWNW 1962FNL 774FWL At total depth SWNW 1991FNL 759FWL				8. Lease Name and Well No. 5-7D-45 BTR	
14. Date Spudded 03/02/2013		15. Date T.D. Reached 03/30/2013		16. Date Completed <input type="checkbox"/> D & A <input checked="" type="checkbox"/> Ready to Prod. 05/09/2013	
17. Elevations (DF, KB, RT, GL)* 6142 GL		10. Field and Pool, or Exploratory ALTAMONT			
11. Sec., T., R., M., or Block and Survey or Area Sec 7 T4S R5W Mer UBM		12. County or Parish DUCHESNE		13. State UT	
18. Total Depth: MD 8221 TVD 8184		19. Plug Back T.D.: MD 8117 TVD 8080		20. Depth Bridge Plug Set: MD TVD	
21. Type Electric & Other Mechanical Logs Run (Submit copy of each) CBL, GR, CCL/TEMP, MUD				22. Was well cored? <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes (Submit analysis) Was DST run? <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes (Submit analysis) Directional Survey? <input type="checkbox"/> No <input checked="" type="checkbox"/> Yes (Submit analysis)	

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
26.000	16.000 COND	65.0	0	90	80				
12.250	9.625 J-55	36.0	0	2121	2121	560	236	0	
8.750	5.500 P-110	17.0	0	8221	8221	1200	548	3282	

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2.875	6250							

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) GREEN RIVER	6347	6912	6347 TO 6912	0.360	126	OPEN
B) WASATCH	6937	8009	6937 TO 8009	0.360	186	OPEN
C)						
D)						

26. Perforation Record

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and Type of Material
6347 TO 6912	SEE ATTACHED STAGES 5-7
6937 TO 8009	SEE ATTACHED STAGES 1-4

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
05/09/2013	05/09/2013	24		361.0	457.0	1062.0	52.0		FLows FROM WELL
Choke Size	Tbg. Press. Flwg. 260 SI	Csg. Press. 1225.0	24 Hr. Rate	Oil BBL 361	Gas MCF 457	Water BBL 1062	Gas:Oil Ratio 1266	Well Status POW	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

(See Instructions and spaces for additional data on reverse side)

ELECTRONIC SUBMISSION #209144 VERIFIED BY THE BLM WELL INFORMATION SYSTEM

** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED **

RECEIVED: May. 31, 2013

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

29. Disposition of Gas(*Sold, used for fuel, vented, etc.*)

SOLD

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
				GREEN RIVER MAHOGANY DOUGLAS CREEK BLACK SHALE CASTLE PEAK UTELAND BUTTE WASATCH	2393 3201 5346 6151 6395 6709 6939

32. Additional remarks (include plugging procedure):

TOC was calculated by CBL. First gas sales were on 05/09/13 and first oil sales were on 05/10/13. Conductor cemented with grout. Attached is treatment data and end of well report.

33. Circle enclosed attachments:

- | | | | |
|-------------------------------------------------------|--------------------|---------------|-----------------------|
| 1. Electrical/Mechanical Logs (1 full set req'd.) | 2. Geologic Report | 3. DST Report | 4. Directional Survey |
| 5. Sundry Notice for plugging and cement verification | 6. Core Analysis | 7 Other: | |

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions):

**Electronic Submission #209144 Verified by the BLM Well Information System.
For BILL BARRETT CORPORATION, sent to the Vernal**

Name(*please print*) VENESSA LANGMACHERTitle SENIOR PERMIT ANALYST

Signature _____ (Electronic Submission)

Date 05/31/2013

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ****

RECEIVED: May. 31, 2013

5-7D-45 BTR Completion Report Continued*

44. ACID, FRACTURE, TREATMENT, CEMENT SQUEEZE, ETC. (cont.)			
AMOUNT AND TYPE OF MATERIAL			
<u>Stage</u>	<u>BBS Total Fluid</u>	<u>gal HCl Acid</u>	<u>lbs 20/40 White Sand</u>
1	2966	3866	136500
2	3127	4126	150800
3	3102	3829	150100
4	3129	3971	153500
5	544	15359	
6	530	15049	
7	525	15004	

*Depth intervals for frac information same as perforation record intervals.

BILL BARRETT CORPORATION

UTAH (DUCHESNE COUNTY - NAD 83)

SEC. 7 T4S R5W U.S.B. & M.

#5-7D-45 BTR

JOB #2009-166



29 March, 2013

Survey: FINAL SURVEYS





Project: UTAH (DUCHESNE COUNTY - NAD 83)
Site: SEC. 7 T4S R5W U.S.B. & M.
Well: #5-7D-45 BTR
Wellbore: JOB #2009-166
Design: FINAL SURVEYS

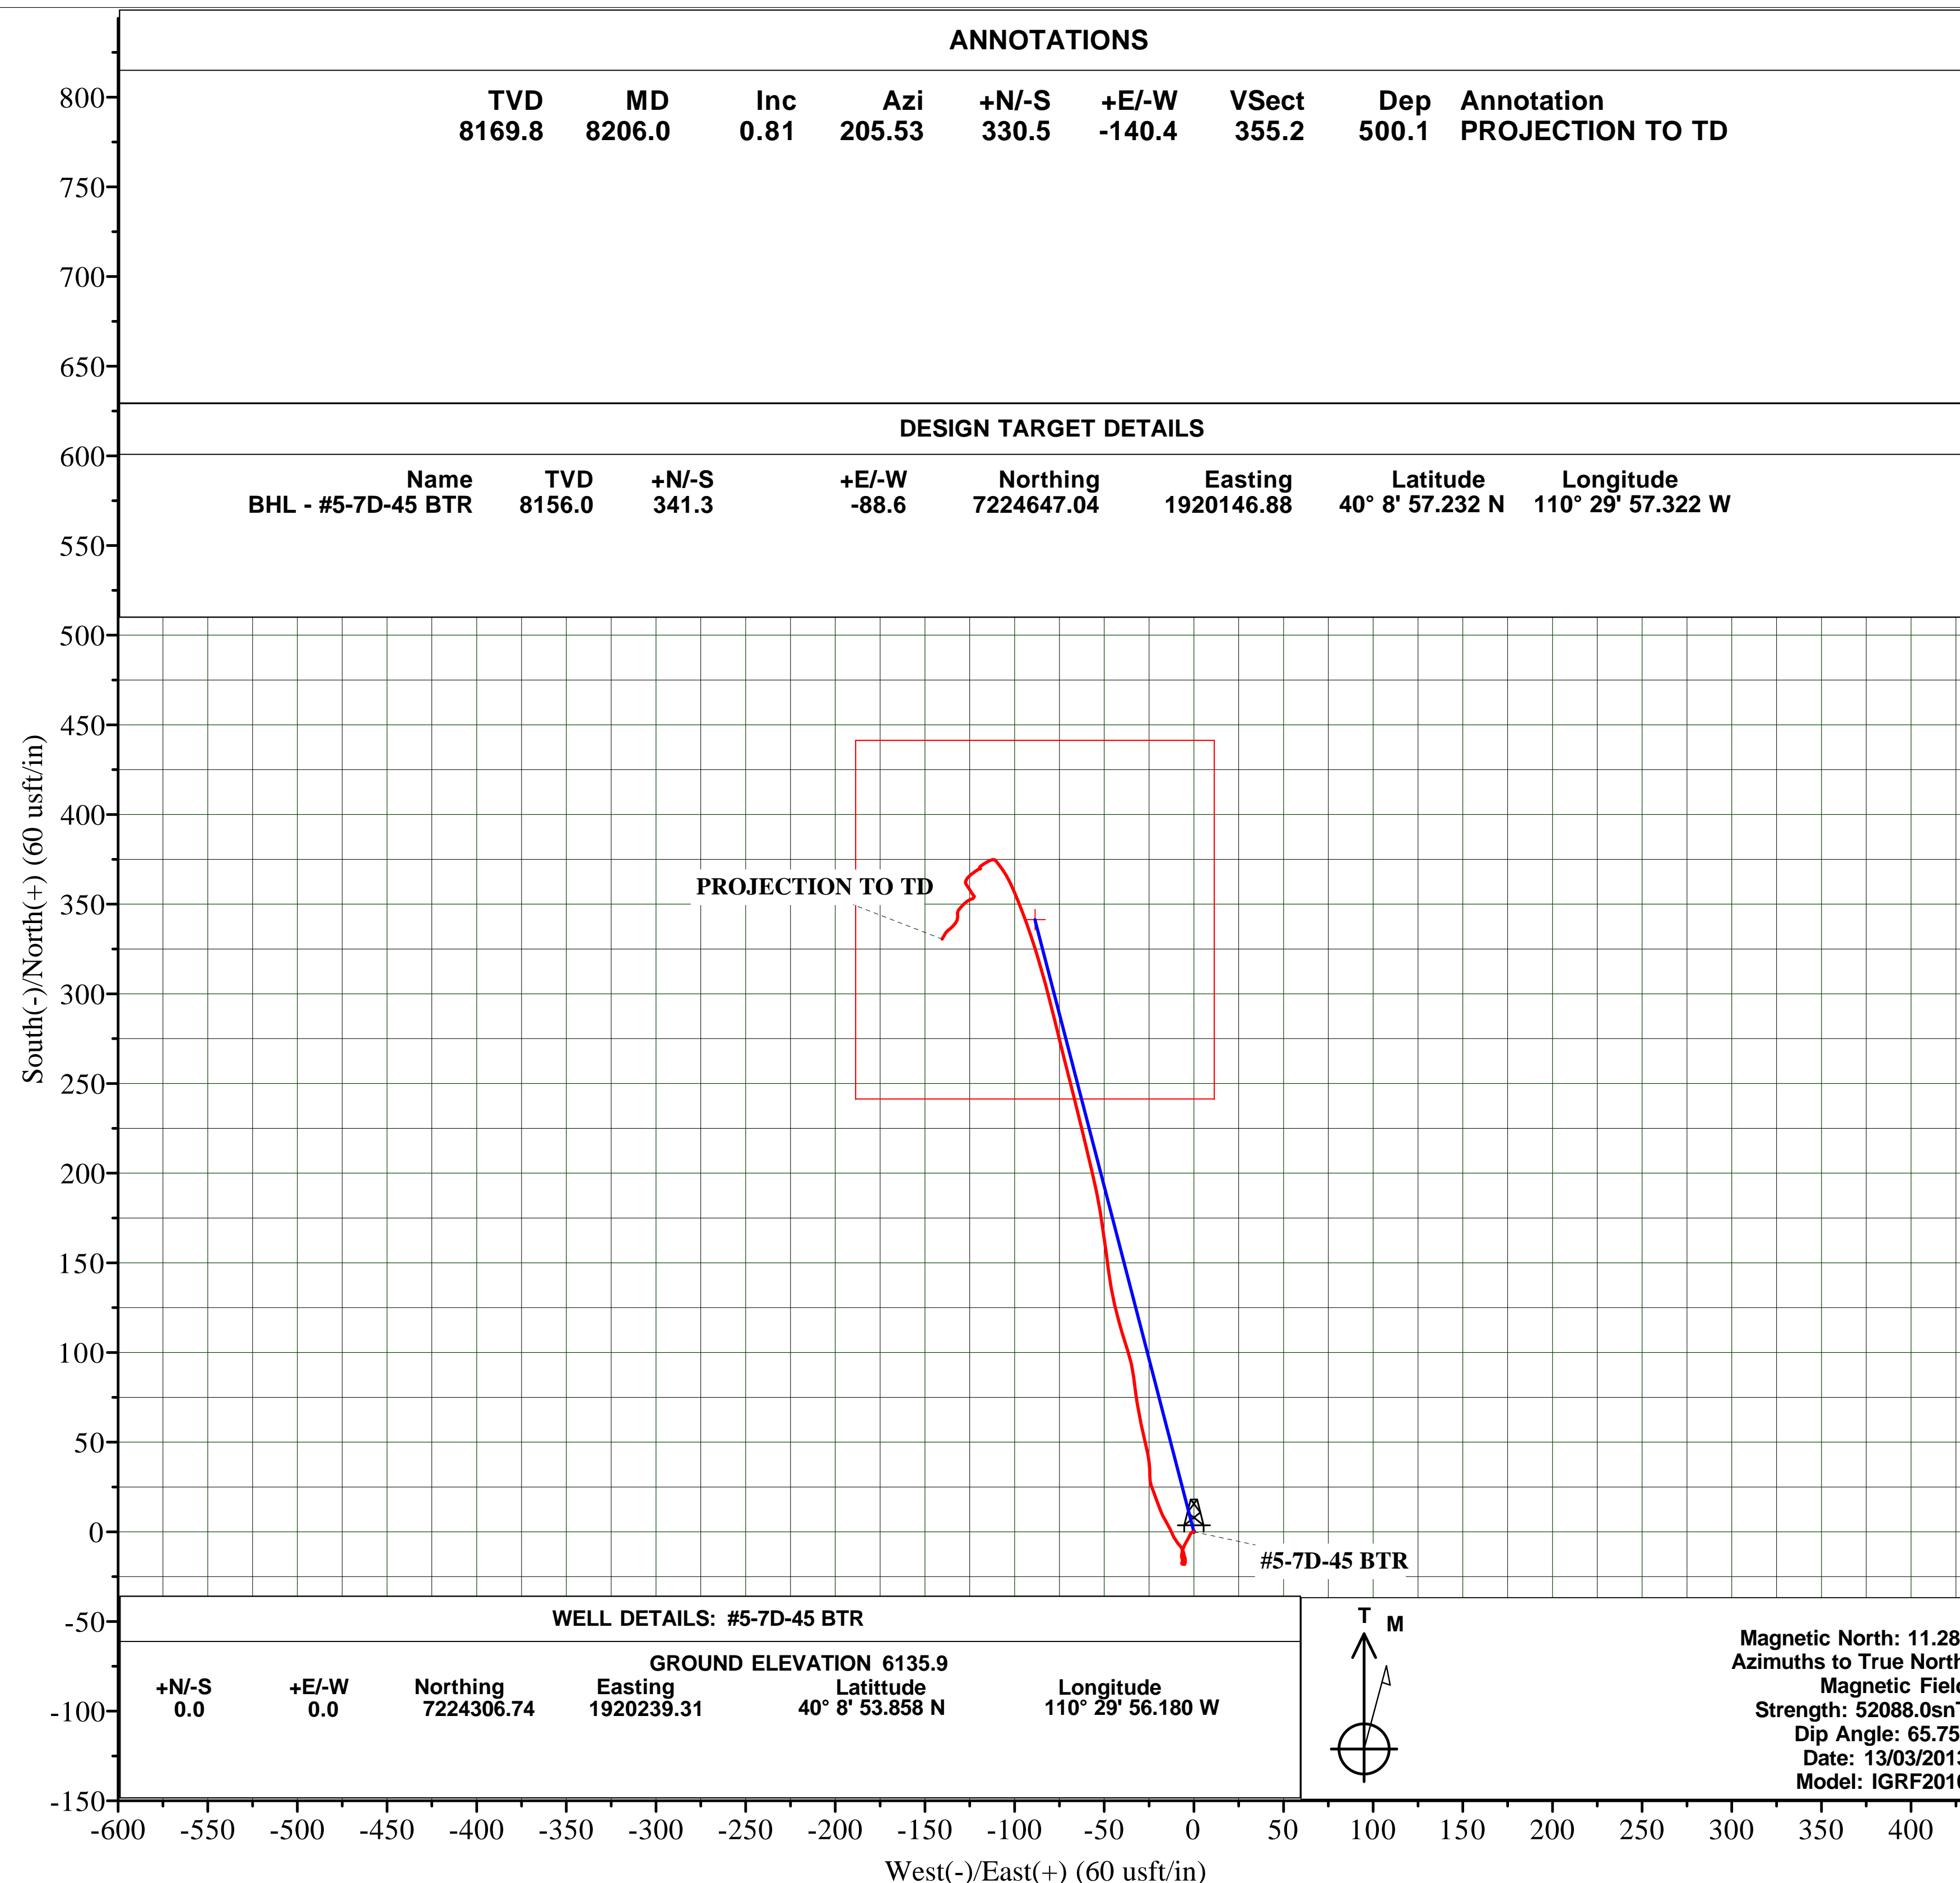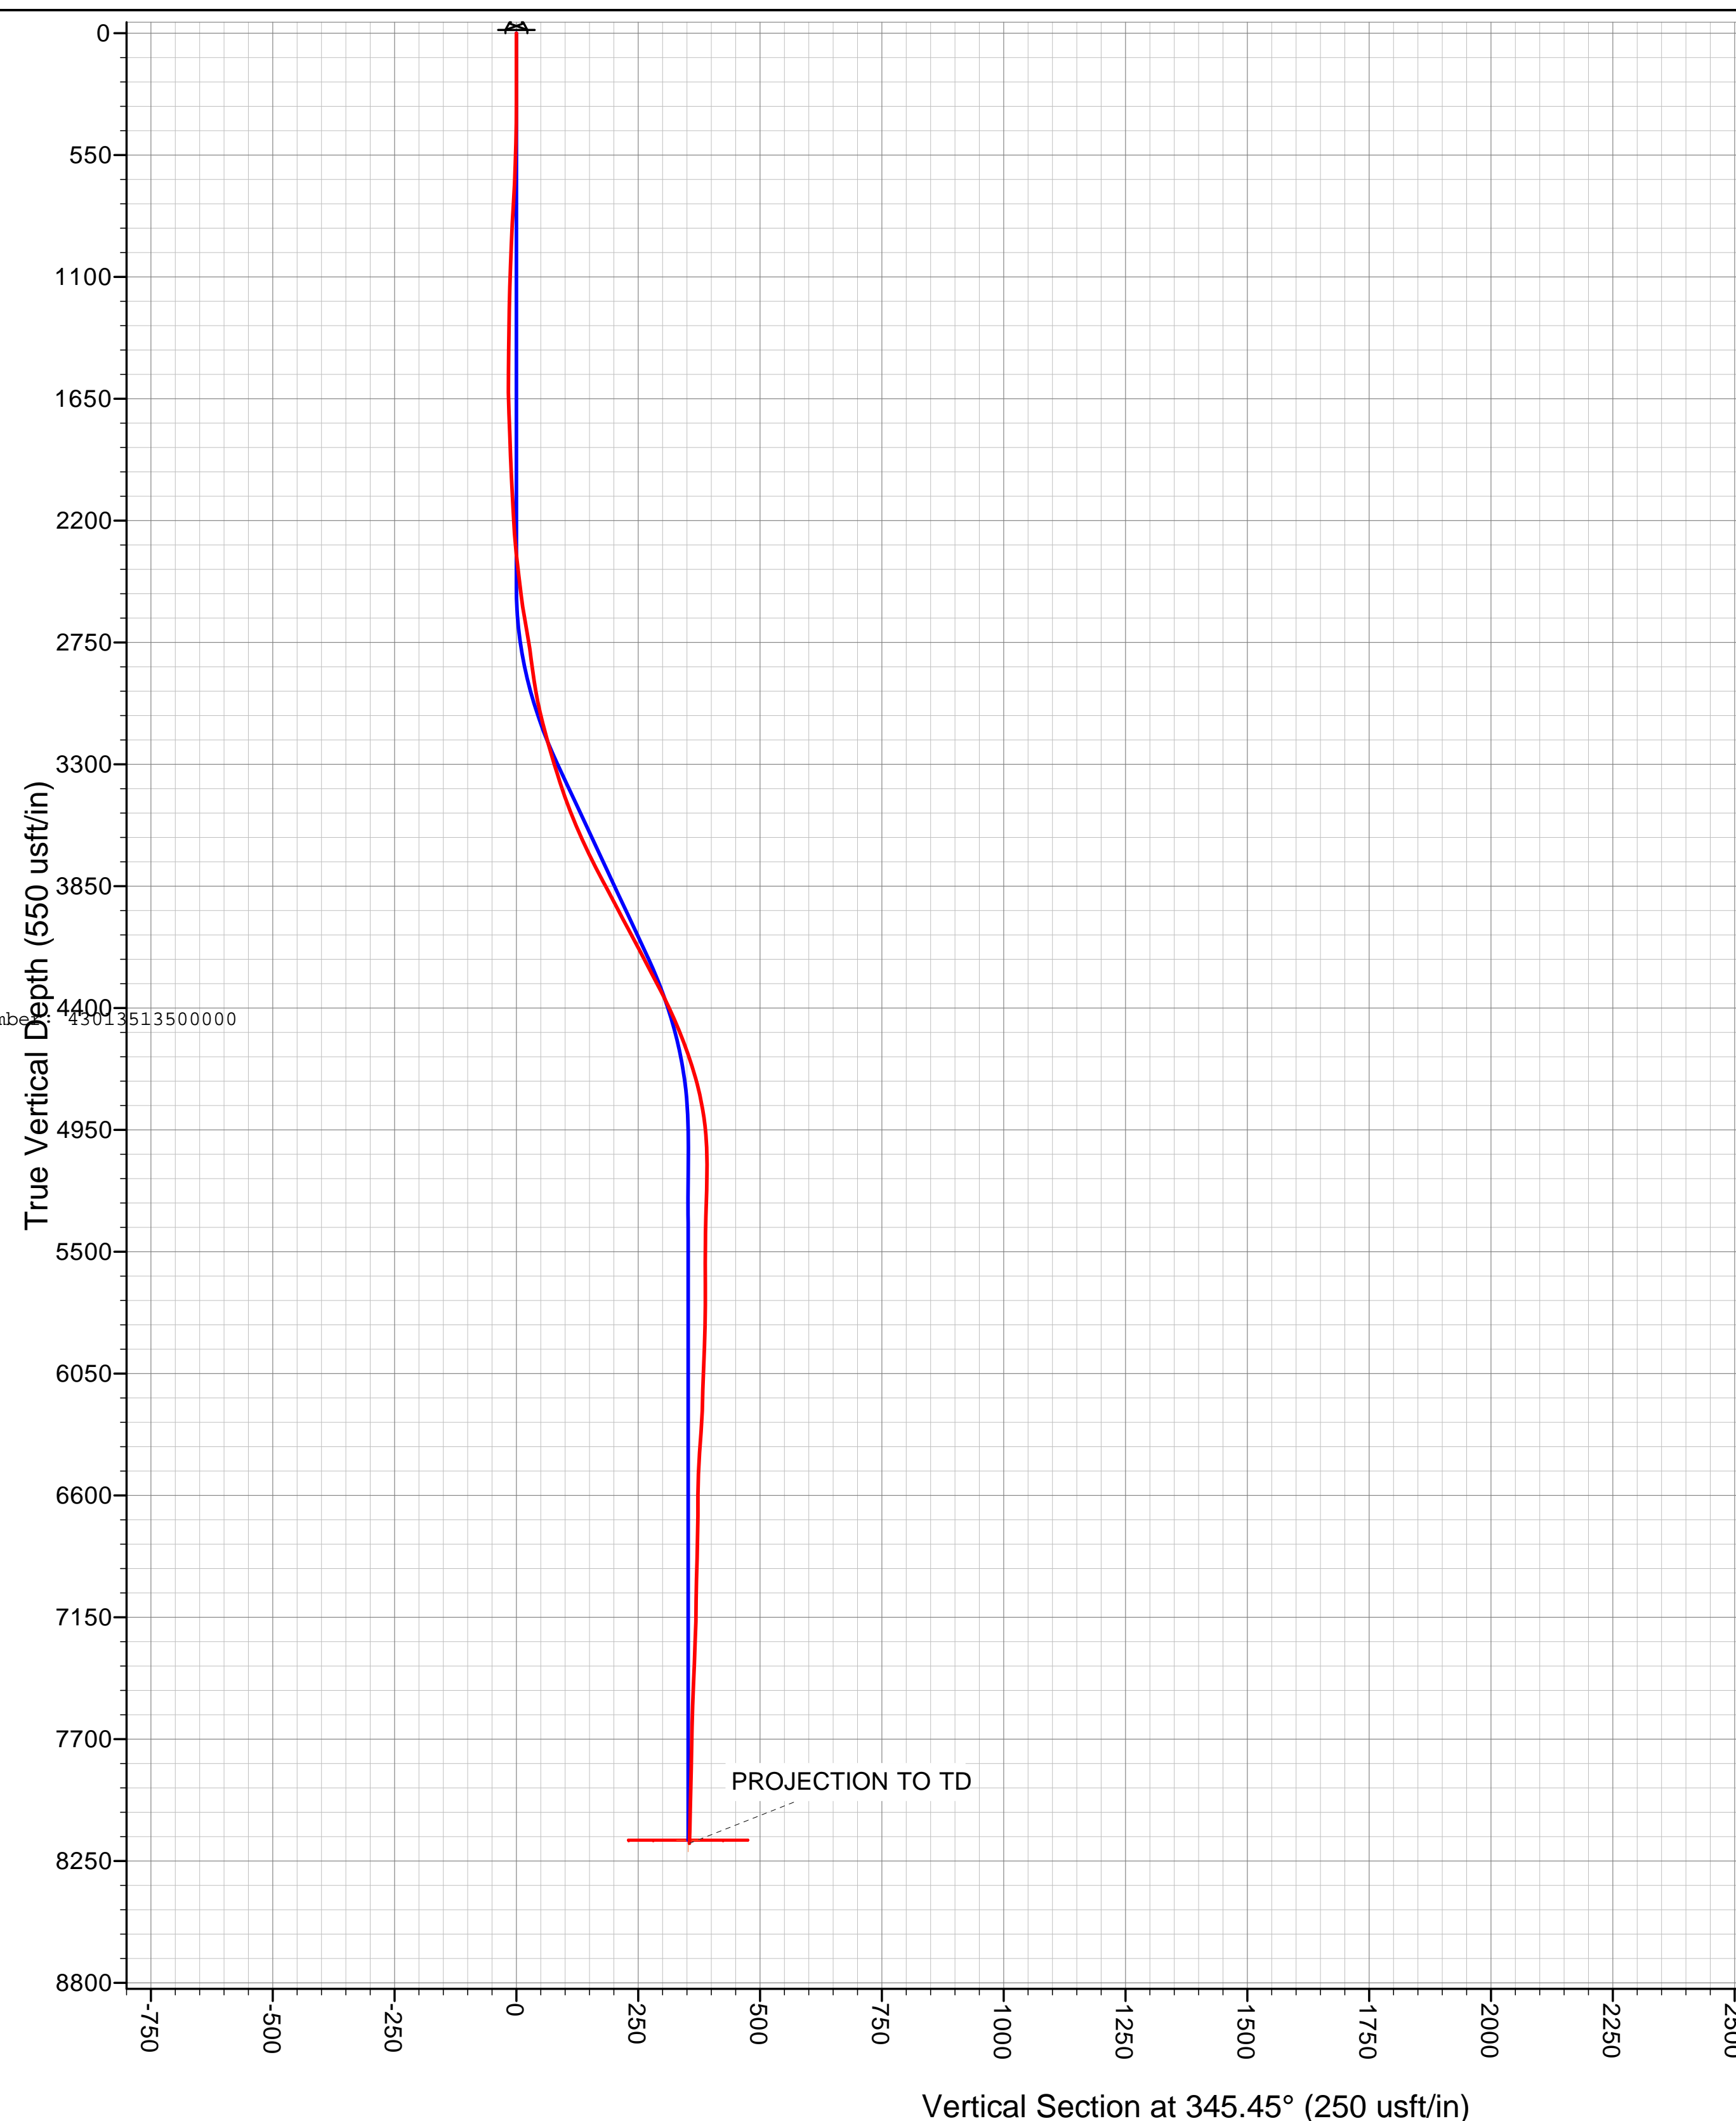

Survey Report



Company:	BILL BARRETT CORPORATION	Local Co-ordinate Reference:	Well #5-7D-45 BTR
Project:	UTAH (DUCHESNE COUNTY - NAD	TVD Reference:	KB-EST @ 6151.0usft (Original Well Elev)
Site:	SEC. 7 T4S R5W U.S.B.& M.	MD Reference:	KB-EST @ 6151.0usft (Original Well Elev)
Well:	#5-7D-45 BTR	North Reference:	True
Wellbore:	JOB #2009-166	Survey Calculation Method:	Minimum Curvature
Design:	FINAL SURVEYS	Database:	EDM 5000.1 Single User Db

Project	UTAH (DUCHESNE COUNTY - NAD 83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		Using geodetic scale factor

Site	SEC. 7 T4S R5W U.S.B.& M.		
Site Position:		Northing:	7,224,306.74 usft
From:	Lat/Long	Easting:	1,920,239.31 usft
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16"
		Latitude:	40° 8' 53.858 N
		Longitude:	110° 29' 56.180 W
		Grid Convergence:	0.64 °

Well	#5-7D-45 BTR		
Well Position	+N-S	0.0 usft	Northing: 7,224,306.74 usft
	+E-W	0.0 usft	Easting: 1,920,239.31 usft
Position Uncertainty	0.0 usft	Wellhead Elevation:	usft
		Latitude:	40° 8' 53.858 N
		Longitude:	110° 29' 56.180 W
		Ground Level:	6,135.9 usft

Wellbore	JOB #2009-166				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	13/03/2013	11.28	65.75	52,088

Design	FINAL SURVEYS				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N-S (usft)	+E-W (usft)	Direction (°)	
	0.0	0.0	0.0	345.45	

Survey Program	Date	29/03/2013			
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
222.0	8,206.0	FINAL SURVEYS (JOB #2009-166)	MWD	MWD - Standard	

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	Subsea Depth (usft)	+N-S (usft)	+E-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	6,151.0	0.0	0.0	0.0	0.00	0.00	0.00
222.0	0.26	265.90	222.0	5,929.0	0.0	-0.5	0.1	0.12	0.12	0.00
313.0	0.22	260.45	313.0	5,838.0	-0.1	-0.9	0.1	0.05	-0.04	-5.99
405.0	0.57	222.04	405.0	5,746.0	-0.4	-1.4	-0.1	0.46	0.38	-41.75
497.0	0.92	208.42	497.0	5,654.0	-1.4	-2.0	-0.9	0.42	0.38	-14.80
588.0	1.23	205.96	588.0	5,563.0	-3.0	-2.8	-2.2	0.34	0.34	-2.70
678.0	1.45	209.21	677.9	5,473.1	-4.8	-3.8	-3.7	0.26	0.24	3.61
769.0	2.20	209.56	768.9	5,382.1	-7.3	-5.2	-5.8	0.82	0.82	0.38
860.0	1.71	191.72	859.8	5,291.2	-10.2	-6.3	-8.3	0.85	-0.54	-19.60
956.0	1.10	189.08	955.8	5,195.2	-12.5	-6.8	-10.4	0.64	-0.64	-2.75
1,051.0	0.92	170.80	1,050.8	5,100.2	-14.2	-6.8	-12.0	0.39	-0.19	-19.24
1,146.0	0.83	158.41	1,145.8	5,005.2	-15.6	-6.4	-13.4	0.22	-0.09	-13.04
1,241.0	0.57	210.09	1,240.8	4,910.2	-16.6	-6.4	-14.5	0.69	-0.27	54.40

Survey Report



Company:	BILL BARRETT CORPORATION	Local Co-ordinate Reference:	Well #5-7D-45 BTR
Project:	UTAH (DUCHESNE COUNTY - NAD	TVD Reference:	KB-EST @ 6151.0usft (Original Well Elev)
Site:	SEC. 7 T4S R5W U.S.B.& M.	MD Reference:	KB-EST @ 6151.0usft (Original Well Elev)
Well:	#5-7D-45 BTR	North Reference:	True
Wellbore:	JOB #2009-166	Survey Calculation Method:	Minimum Curvature
Design:	FINAL SURVEYS	Database:	EDM 5000.1 Single User Db

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	Subsea Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
1,336.0	0.53	196.82	1,335.8	4,815.2	-17.4	-6.8	-15.2	0.14	-0.04	-13.97
1,431.0	0.40	105.94	1,430.8	4,720.2	-17.9	-6.6	-15.7	0.70	-0.14	-95.66
1,527.0	0.62	105.41	1,526.8	4,624.2	-18.2	-5.8	-16.1	0.23	0.23	-0.55
1,622.0	0.22	42.04	1,621.8	4,529.2	-18.2	-5.1	-16.3	0.59	-0.42	-66.71
1,717.0	1.41	11.19	1,716.8	4,434.2	-16.9	-4.8	-15.1	1.29	1.25	-32.47
1,812.0	0.88	338.32	1,811.7	4,339.3	-15.1	-4.8	-13.4	0.87	-0.56	-34.60
1,907.0	1.01	346.49	1,906.7	4,244.3	-13.6	-5.3	-11.8	0.20	0.14	8.60
2,002.0	1.05	347.81	2,001.7	4,149.3	-11.9	-5.7	-10.1	0.05	0.04	1.39
2,057.0	1.45	340.34	2,056.7	4,094.3	-10.8	-6.0	-8.9	0.78	0.73	-13.58
2,161.0	1.41	325.05	2,160.7	3,990.3	-8.5	-7.2	-6.4	0.37	-0.04	-14.70
2,257.0	1.80	315.12	2,256.6	3,894.4	-6.4	-8.9	-4.0	0.50	0.41	-10.34
2,352.0	3.16	332.70	2,351.5	3,799.5	-3.1	-11.2	-0.1	1.62	1.43	18.51
2,447.0	2.90	337.97	2,446.4	3,704.6	1.5	-13.3	4.8	0.40	-0.27	5.55
2,542.0	3.65	327.37	2,541.3	3,609.7	6.3	-15.8	10.0	1.01	0.79	-11.16
2,638.0	4.66	338.94	2,637.0	3,514.0	12.5	-18.9	16.8	1.36	1.05	12.05
2,733.0	4.31	340.25	2,731.7	3,419.3	19.4	-21.5	24.2	0.38	-0.37	1.38
2,828.0	3.30	338.76	2,826.5	3,324.5	25.4	-23.7	30.5	1.07	-1.06	-1.57
2,923.0	3.96	1.44	2,921.3	3,229.7	31.2	-24.6	36.4	1.65	0.69	23.87
3,019.0	5.31	353.09	3,017.0	3,134.0	38.9	-25.0	43.9	1.57	1.41	-8.70
3,114.0	6.75	346.76	3,111.5	3,039.5	48.7	-26.8	53.9	1.67	1.52	-6.66
3,209.0	7.25	347.29	3,205.8	2,945.2	60.0	-29.4	65.5	0.53	0.53	0.56
3,304.0	7.95	351.59	3,299.9	2,851.1	72.3	-31.7	78.0	0.95	0.74	4.53
3,399.0	8.96	352.82	3,393.9	2,757.1	86.2	-33.6	91.9	1.08	1.06	1.29
3,494.0	9.14	342.19	3,487.7	2,663.3	100.7	-36.8	106.7	1.77	0.19	-11.19
3,589.0	11.44	344.02	3,581.2	2,569.8	116.9	-41.7	123.7	2.45	2.42	1.93
3,685.0	11.78	350.10	3,675.2	2,475.8	135.8	-46.0	143.0	1.32	0.35	6.33
3,780.0	13.40	353.09	3,767.9	2,383.1	156.2	-49.0	163.5	1.84	1.71	3.15
3,874.0	13.89	350.45	3,859.3	2,291.7	178.2	-52.2	185.6	0.84	0.52	-2.81
3,969.0	13.01	346.67	3,951.7	2,199.3	199.8	-56.6	207.6	1.31	-0.93	-3.98
4,065.0	14.06	346.58	4,045.0	2,106.0	221.7	-61.8	230.1	1.09	1.09	-0.09
4,159.0	13.14	345.70	4,136.4	2,014.6	243.1	-67.0	252.2	1.00	-0.98	-0.94
4,254.0	13.54	345.88	4,228.8	1,922.2	264.4	-72.4	274.1	0.42	0.42	0.19
4,349.0	13.18	346.14	4,321.2	1,829.8	285.7	-77.7	296.1	0.38	-0.38	0.27
4,444.0	11.73	344.91	4,414.0	1,737.0	305.5	-82.8	316.5	1.55	-1.53	-1.29
4,540.0	10.55	342.72	4,508.2	1,642.8	323.3	-88.0	335.1	1.31	-1.23	-2.28
4,635.0	9.10	340.25	4,601.8	1,549.2	338.7	-93.1	351.3	1.59	-1.53	-2.60
4,730.0	7.78	338.15	4,695.8	1,455.2	351.8	-98.0	365.1	1.43	-1.39	-2.21
4,825.0	5.93	334.10	4,790.1	1,360.9	362.1	-102.6	376.3	2.01	-1.95	-4.26
4,920.0	4.35	323.03	4,884.7	1,266.3	369.4	-106.9	384.4	1.96	-1.66	-11.65
5,016.0	1.99	323.29	4,980.6	1,170.4	373.7	-110.1	389.4	2.46	-2.46	0.27
5,111.0	1.10	263.97	5,075.5	1,075.5	374.9	-112.0	391.0	1.80	-0.94	-62.44
5,205.0	1.89	242.52	5,169.5	981.5	374.1	-114.2	390.8	1.02	0.84	-22.82
5,301.0	2.24	239.36	5,265.4	885.6	372.4	-117.3	389.9	0.38	0.36	-3.29
5,396.0	1.01	217.30	5,360.4	790.6	370.8	-119.4	388.9	1.43	-1.29	-23.22
5,491.0	0.46	109.63	5,455.4	695.6	370.0	-119.5	388.2	1.30	-0.58	-113.34
5,587.0	0.31	168.34	5,551.4	599.6	369.6	-119.1	387.7	0.42	-0.16	61.16
5,682.0	0.44	4.60	5,646.4	504.6	369.7	-119.0	387.8	0.78	0.14	-172.36
5,777.0	1.45	239.88	5,741.4	409.6	369.5	-120.0	387.8	1.83	1.06	-131.28
5,872.0	1.58	234.70	5,836.3	314.7	368.1	-122.1	387.0	0.20	0.14	-5.45
5,967.0	2.07	231.01	5,931.3	219.7	366.3	-124.5	385.8	0.53	0.52	-3.88
6,062.0	1.27	212.11	6,026.2	124.8	364.3	-126.4	384.4	1.01	-0.84	-19.89
6,158.0	1.36	199.81	6,122.2	28.8	362.4	-127.4	382.7	0.31	0.09	-12.81
6,253.0	0.83	101.28	6,217.2	-66.2	361.2	-127.1	381.5	1.78	-0.56	-103.72

Survey Report



Company:	BILL BARRETT CORPORATION	Local Co-ordinate Reference:	Well #5-7D-45 BTR
Project:	UTAH (DUCHESNE COUNTY - NAD	TVD Reference:	KB-EST @ 6151.0usft (Original Well Elev)
Site:	SEC. 7 T4S R5W U.S.B.& M.	MD Reference:	KB-EST @ 6151.0usft (Original Well Elev)
Well:	#5-7D-45 BTR	North Reference:	True
Wellbore:	JOB #2009-166	Survey Calculation Method:	Minimum Curvature
Design:	FINAL SURVEYS	Database:	EDM 5000.1 Single User Db

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	Subsea Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
6,348.0	2.40	159.22	6,312.2	-161.2	359.2	-125.7	379.2	2.19	1.65	60.99
6,443.0	1.89	133.98	6,407.1	-256.1	356.2	-123.9	375.9	1.12	-0.54	-26.57
6,539.0	1.05	160.87	6,503.1	-352.1	354.3	-122.5	373.7	1.11	-0.87	28.01
6,634.0	1.32	248.85	6,598.1	-447.1	353.1	-123.2	372.7	1.74	0.28	92.61
6,729.0	0.97	256.14	6,693.0	-542.0	352.5	-125.0	372.6	0.40	-0.37	7.67
6,824.0	1.58	227.75	6,788.0	-637.0	351.4	-126.7	372.0	0.91	0.64	-29.88
6,920.0	1.23	229.42	6,884.0	-733.0	349.8	-128.5	370.9	0.37	-0.36	1.74
7,015.0	1.45	215.45	6,979.0	-828.0	348.2	-130.0	369.7	0.41	0.23	-14.71
7,110.0	0.13	281.28	7,074.0	-923.0	347.2	-130.8	369.0	1.48	-1.39	69.29
7,205.0	1.23	214.13	7,169.0	-1,018.0	346.4	-131.5	368.3	1.25	1.16	-70.68
7,300.0	0.83	162.63	7,263.9	-1,112.9	344.9	-131.8	367.0	1.02	-0.42	-54.21
7,395.0	1.19	183.90	7,358.9	-1,207.9	343.3	-131.7	365.4	0.54	0.38	22.39
7,490.0	1.45	193.92	7,453.9	-1,302.9	341.1	-132.0	363.4	0.36	0.27	10.55
7,585.0	0.97	227.23	7,548.9	-1,397.9	339.4	-132.9	361.9	0.88	-0.51	35.06
7,681.0	1.58	217.65	7,644.9	-1,493.9	337.8	-134.3	360.7	0.67	0.64	-9.98
7,776.0	0.92	239.71	7,739.8	-1,588.8	336.4	-135.8	359.7	0.85	-0.69	23.22
7,871.0	1.41	226.61	7,834.8	-1,683.8	335.2	-137.3	359.0	0.58	0.52	-13.79
7,966.0	0.70	209.21	7,929.8	-1,778.8	333.9	-138.4	358.0	0.81	-0.75	-18.32
8,061.0	1.10	212.46	8,024.8	-1,873.8	332.6	-139.2	356.9	0.42	0.42	3.42
8,151.0	0.92	208.16	8,114.8	-1,963.8	331.3	-140.0	355.8	0.22	-0.20	-4.78
PROJECTION TO TD										
8,206.0	0.81	205.53	8,169.8	-2,018.8	330.5	-140.4	355.2	0.21	-0.20	-4.78

Targets										
Target Name										
- hit/miss target	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude		Longitude
- Shape										
BHL - #5-7D-45 BTR	0.00	0.00	8,156.0	341.3	-88.6	7,224,647.04	1,920,146.88	40° 8' 57.232 N		110° 29' 57.322 W
- survey misses target center by 52.8usft at 8191.7usft MD (8155.5 TVD, 330.7 N, -140.3 E)										
- Rectangle (sides W200.0 H200.0 D0.0)										

Survey Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment	
		+N/-S (usft)	+E/-W (usft)		
8,206.0	8,169.8	330.5	-140.4	PROJECTION TO TD	

Checked By: _____ Approved By: _____ Date: _____

**5-7D-45 BTR 3/18/2013 06:00 - 3/19/2013 06:00**

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	12.00	18:00	1	RIGUP & TEARDOWN	MOVE RIG TO 5-7D-45 BTR & RIG UP
18:00	12.00	06:00	1	RIGUP & TEARDOWN	WAIT ON DAYLIGHT

5-7D-45 BTR 3/19/2013 06:00 - 3/20/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	12.00	18:00	1	RIGUP & TEARDOWN	RIG UP TRUCKS RELEASED @ 10AM/DERRICK IN AIR @ 12:30 PM TRANSFERING 9.8# MUD FROM RIG M-22
18:00	11.50	05:30	1	RIGUP & TEARDOWN	RIG UP FLOOR, GASBUSTER, FLARE LINES, CUNDUTOR, FLOW LINE, TURN BUCKELS, SCAFLTING, STAIRS, PASON LINES, POWER LINES KELLY/SPINNERS PRE SUD INSPECTION REPAIRS TO PREMIX TEST FOR LEAKS
05:30	0.50	06:00	20	DIRECTIONAL WORK	PICK UP DIRECTIONAL TOOLS, REAMERS, SHOCK SUB,

5-7D-45 BTR 3/20/2013 06:00 - 3/21/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	2.50	08:30	20	DIRECTIONAL WORK	DIRECTIONAL WORK PICK UP STABS MONELS, SCRIBE AND M/U BIT
08:30	8.00	16:30	2	DRILL ACTUAL	STEERABLE DRILLING F/ 90 - 562' (502' @ 62'/ Hr AVG). WOB 14k, GPM 668, MTR RPM 95, RPM 45 SLIDING 0%, ROTOATE 100%.
16:30	0.50	17:00	7	LUBRICATE RIG	RIG SERVICE
17:00	13.00	06:00	2	DRILL ACTUAL	STEERABLE DRILLING F/ 562 - 1336' (774' @ 60'/ Hr AVG). WOB 20k, GPM 552, MTR RPM 95, RPM 45 SLIDING 10%, ROTOATE 90%.

5-7D-45 BTR 3/21/2013 06:00 - 3/22/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	11.50	17:30	2	DRILL ACTUAL	STEERABLE DRILLING F/ 1336 - 1908' (572' @ 49'/ Hr AVG). WOB 20k, GPM 552, MTR RPM 95, RPM 45 SLIDING 60%, ROTOATE 40%.
17:30	0.50	18:00	7	LUBRICATE RIG	RIG SERVICE
18:00	5.50	23:30	2	DRILL ACTUAL	STEERABLE DRILLING F/ 1908' - 2122' (214' @ 38'/ Hr AVG). WOB 20k, GPM 552, MTR RPM 95, RPM 45 SLIDING 80%, ROTOATE 20%.
23:30	1.00	00:30	5	COND MUD & CIRC	PUMPED TWO SWEEPS AROUND AND CIRCULATE FOR SHORT TRIP
00:30	1.50	02:00	6	TRIPS	BLOW DOWN KELLY WIPER TRIP F/ 2122'-925'-2122' HOLE DISPLACEMET 22.3 BBLS THEORETICAL 22.4 BBLS
02:00	0.50	02:30	5	COND MUD & CIRC	CIRCULATE BTMS UP PUMP
02:30	1.50	04:00	6	TRIPS	TRIP OUT OF HOLE F/ 2122'-150' HOLE DISPLACEMT 49.3 BBLS THEORETICAL 49.6 BBLS
04:00	1.00	05:00	21	OPEN	HOLD S/M WITH FRANKS (HAD THEM RE STRING FAST LINE) R/U LAYDOWN MACHINE TO LAY DOWN DIRECTIONAL TOOLS AND 8" DC REAMERS, SHOCK SUB
05:00	1.00	06:00	20	DIRECTIONAL WORK	LAY DOWN DIRECTIONAL TOOLS AND 8" DC REAMERS, SHOCK SUB, NMDC, MOTOR, BREAK BIT

5-7D-45 BTR 3/22/2013 06:00 - 3/23/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	1.50	07:30	20	DIRECTIONAL WORK	HELD S/M WITH FRANKS ON LAY DOWN DIRECTIONAL TOOLS AND RUNNING CASING, FINISH LAYING DOWN DIRECTIONAL TOOLS.
07:30	5.50	13:00	12	RUN CASING & CEMENT	RUN CASING (J-55 36# LTC 9 5/8) WITH FRANKS F/0'-2122' BREAK CIRCULATION @ 1580'
13:00	1.50	14:30	12	RUN CASING & CEMENT	CIRCULATE HOLE CLEAN FOR CEMENT JOB & RIG DOWN CASING CREW
14:30	3.50	18:00	12	RUN CASING & CEMENT	HELD S/M WITH HALLIBURTON RIG UP CEMENT EQUIPMENT W.O.C

**Time Log**

Start Time	Dur (hr)	End Time	Code	Category	Com
18:00	3.00	21:00	12	RUN CASING & CEMENT	CEMENT WITH HALLIBURTON FILL LINES TEST TO 5000 PSI PUMP 20 BBLS FRESH WATER 40 BBLS SUPER FLUSH @ 10 # PUMP 20 BBLS FRESH WATER PUMP LEAD CEMENT (180 BBLS @ 11# 3.16 Y 19.48 WR 320 SKS) PUMP TAIL CEMENT (56 BBLS @ 14# 1.33 Y 6.31 WR 240 SKS) DROP PLUG DISPLACE FIRST 10 BBLS WATER DISPLACE 161 BBLS MUD @ 9.5# LAST 20 BBLS WATER BUMP PLUG @ 1100 PSI 500 OVER 90 BBLS BACK TO SURFACE
21:00	1.50	22:30	12	RUN CASING & CEMENT	W.O.C FELL 15" RIG UP 1' LINE FOR TOP JOB TOP OUT WITH 20 BBLS 15.8# 1.17 Y
22:30	4.50	03:00	12	RUN CASING & CEMENT	CUT OFF LANDING JOINT AND WELD ON WELL HEAD WITH TERRYS MACHINE
03:00	3.00	06:00	14	NIPPLE UP B.O.P	NIPPLE UP B.O.Ps

5-7D-45 BTR 3/23/2013 06:00 - 3/24/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	8.00	14:00	15	TEST B.O.P	HELD SAFTEY MEETING TEST B.O.Ps LOW 250 HIGH 5000 LOWER KELLY VALVE, UPPER KELLY VALVE, DART VALVE PIPE RAMS AND INSIDE VLAVES (PIPE RAMS, HCR & OUT SIDE KILL LINE) (PIPE RAMS, CHOKE LINE, CHECK VALVE UPRIGHT GAGE VALVE & INSIDE MANIFOLD VALVES) BLIND RAMS, CHOKE LINES & MANIFOLD VALVES TEST ANNULAR, BILIND RAMS AND SUPER CHOKE LOW 5 MINS HIGH 10 MINS CASING 1500 PSI 30 MINS (TESTERS NAME & COMPANY C MASSEY WITH B&C QUICK TEST)
14:00	0.50	14:30	21	OPEN	INSTALL WARE BUSHING
14:30	2.50	17:00	20	DIRECTIONAL WORK	PICK UP DIRECTIONAL TOOLS WITH TOTAL M/U BIT SCRIBE PICK UP MONELS, REAMERS, MWD, MUD MOTOR
17:00	1.00	18:00	6	TRIPS	TRIP IN HOLE F/ 0-2,050'
18:00	1.00	19:00	3	TRIPS	DRILL OUT CEMENT, FLOAT & SHOE F/ 2,050'-2,122'
19:00	0.50	19:30	2	DRILL ACTUAL	DRILL 20' OF NEW FORMATION F/ 2,122' - 2,142'
19:30	1.00	20:30	21	OPEN	CIRCULATE BTMS @ 1562 STKS @ 79 SPM EMW TEST 178 PSI 10.5 EMW
20:30	9.50	06:00	2	DRILL ACTUAL	STEERABLE DRILLING F/ 2,142' -2,724 ' (582' @ 64'/ Hr AVG). WOB 15k, GPM 442, MTR RPM 66, RPM 45 SLIDING 50%, ROTOATE 50%.

5-7D-45 BTR 3/24/2013 06:00 - 3/25/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	10.50	16:30	2	DRILL ACTUAL	STEERABLE DRILLING F/ 2,724' -3,454' (730' @ 69'/ Hr AVG). WOB 15k, GPM 442, MTR RPM 66, RPM 45 SLIDING 50%, ROTOATE 50%.
16:30	0.50	17:00	7	LUBRICATE RIG	RIG SERVICE FUNCTION TEST PIPE RAMS
17:00	1.00	18:00	2	DRILL ACTUAL	STEERABLE DRILLING F/ 3,454' -3,570' (116' @ 100'/ Hr AVG). WOB 15k, GPM 442, MTR RPM 66, RPM 45 SLIDING 50%, ROTOATE 50%.
18:00	1.00	19:00	5	COND MUD & CIRC	LOST RETURNS@ 3,551' @ 19:11 CIRCULATE AND BUILD VOLUME AND MIX LCM GOT RETURNS BACK
19:00	11.00	06:00	2	DRILL ACTUAL	STEERABLE DRILLING F/ 3,570' -4,183' (613' @ 55'/ Hr AVG). WOB 15k, GPM 442, MTR RPM 66, RPM 45 SLIDING 50%, ROTOATE 50%.

5-7D-45 BTR 3/25/2013 06:00 - 3/26/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	11.50	17:30	2	DRILL ACTUAL	STEERABLE DRILLING F/ 4,183' -4,722' (539' @ 46'/ Hr AVG). WOB 15k, GPM 442, MTR RPM 66, RPM 45 SLIDING 50%, ROTOATE 50%.
17:30	0.50	18:00	7	LUBRICATE RIG	RIG SERVICE FUNTION TEST PIPE RAMS
18:00	12.00	06:00	2	DRILL ACTUAL	STEERABLE DRILLING F/4,722' -5,356' (634' @ 52'/ Hr AVG). WOB 16k, GPM 442, MTR RPM 66, RPM 45 SLIDING 50%, ROTOATE 50%. (SEEPAGE @ 4,832-4,981)

5-7D-45 BTR 3/26/2013 06:00 - 3/27/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

**Time Log**

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	9.50	15:30	9.5	DRILL ACTUAL	STEERABLE DRILLING F/ 5,356' -5,705' (349' @ 36'/ Hr AVG). WOB 19k, GPM 442, MTR RPM 66, RPM 45 SLIDING 50%, ROTOATE 50%.
15:30	0.50	16:00	7	LUBRICATE RIG	RIG SERVICE FUNCTION TEST PIPE RAMS
16:00	3.00	19:00	2	DRILL ACTUAL	STEERABLE DRILLING F/5,705' -5,864' (159' @ 53'/ Hr AVG). WOB 19.5k, GPM 442, MTR RPM 66, RPM 45 SLIDING 20%, ROTOATE 80%.
19:00	0.50	19:30	21	OPEN	CLEAN OUT SHALE PIT
19:30	10.50	06:00	2	DRILL ACTUAL	STEERABLE DRILLING F/5,864' -6,372' (508' @ 48'/ Hr AVG). WOB 19.5k, GPM 442, MTR RPM 66, RPM 45 SLIDING 20%, ROTOATE 80%.

5-7D-45 BTR 3/27/2013 06:00 - 3/28/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	10.50	16:30	2	DRILL ACTUAL	STEERABLE DRILLING F/ 6,372' -6,657' (285' @ 27'/ Hr AVG). WOB 19.5k, GPM 442, MTR RPM 66, RPM 45 SLIDING 40%, ROTOATE 60%.
16:30	0.50	17:00	7	LUBRICATE RIG	RIG SERVICE FUNCTION TEST PIPE RAMS
17:00	13.00	06:00	2	DRILL ACTUAL	STEERABLE DRILLING F/ 6,657' -7,133' (476' @ 36'/ Hr AVG). WOB 19.5k, GPM 442, MTR RPM 66, RPM 45 SLIDING 80%, ROTOATE 20%.

5-7D-45 BTR 3/28/2013 06:00 - 3/29/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	11.50	17:30	2	DRILL ACTUAL	STEERABLE DRILLING F/ 7,133' -7,609' (476' @ 41'/ Hr AVG). WOB 24K, GPM 442, MTR RPM 66, RPM 45 SLIDING 60%, ROTOATE 40%. SLIGHT LOSSES @ 7,474'
17:30	0.50	18:00	7	LUBRICATE RIG	RIG SERVICE FUNCTION TEST PIPE RAMS
18:00	12.00	06:00	2	DRILL ACTUAL	STEERABLE DRILLING F/ 7,609' -8,116' (507' @ 42'/ Hr AVG). WOB 24K, GPM 442, MTR RPM 66, RPM 45 SLIDING 30%, ROTOATE 70%.

5-7D-45 BTR 3/29/2013 06:00 - 3/30/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	1.00	07:00	2	DRILL ACTUAL	STEERABLE DRILLING F/ 8,116' -8,206' (90' @ 90'/ Hr AVG). WOB 24K, GPM 442, MTR RPM 66, RPM 45 SLIDING 100%, ROTOATE 0%.
07:00	1.50	08:30	5	COND MUD & CIRC	CIRCULATE SWEEPS AROUND PUMP SLUG
08:30	1.00	09:30	6	TRIPS	TRIP OUT F/ 8,206'-6,927' HOLE NOT TAKING PROPER DISPLACEMENT KELLY UP
09:30	1.00	10:30	5	COND MUD & CIRC	BREAK CIRC. CIRC MUD
10:30	1.50	12:00	6	TRIPS	FINISH SHORT TRIP F/ 6,927'-5,804' TRIP BACK TO BOTTOM DISPLACEMENT 40.1 BBLS THEROETICAL 40.6 BBLS
12:00	1.50	13:30	5	COND MUD & CIRC	BREAK CIRCULATION CIRCULATE BOTTOMS UP @ 130 SPM @ 5912 TOTAL STROKES PUMP DRY JOB
13:30	4.50	18:00	6	TRIPS	TRIP OUT OF THE HOLE F/ 8,206'-120' DISPLACEMENT 63.2 BBLS THEROETICAL 59.8 BBLS
18:00	1.00	19:00	20	DIRECTIONAL WORK	LAY DOWN DIRECTIONAL TOOLS STABES, MWD, MONELS & BREAK BIT
19:00	5.50	00:30	11	WIRELINE LOGS	S/M WITH HALLBUTRTON ON RIGGING UP AND RUNNING OPEN HOLE LOGS LOG TAGED UP @ 8,202' RIG DOWN LOGGERS
00:30	5.50	06:00	6	TRIPS	TRIP IN HOLE WITH WIPER BIT F/ 0-6,807' FILL PIPE AND BREAK CIRCULATION @ 2,126'-4,497'-6807'

5-7D-45 BTR 3/30/2013 06:00 - 3/31/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	1.00	07:00	6	TRIPS	FINISH TRIPPING PIPE TAG BOTTOM
07:00	3.00	10:00	5	COND MUD & CIRC	CIRCULATE BOTTOMS UP @ 106 SPM 5911 TOTAL STROKES CIRCULATE GAS OUT

**Time Log**

Start Time	Dur (hr)	End Time	Code	Category	Com
10:00	10.00	20:00	6	TRIPS	S/M ON R/U WEATHERFORD LAY DOWN DRILL PIPE BREAK KELLY LAY DOWN B.H.A BREAK BIT
20:00	0.50	20:30	21	OPEN	PULL WARE BUSHING
20:30	9.50	06:00	12	RUN CASING & CEMENT	S/M ON R/U CASING CREW WEATHERFORD RUN CASING F/ 0-7,900'17# 5.5 LTC FILL PIPE @ 2,122' 4,981'

5-7D-45 BTR 3/31/2013 06:00 - 4/1/2013 06:00

API/UWI	State/Province	County	Field Name	Well Status	Total Depth (ftKB)	Primary Job Type
43013513500000	UT	DUCHESNE	Black Tail Ridge	PRODUCING	8,206.0	Drilling & Completion

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	0.50	06:30	12	RUN CASING & CEMENT	FINISH RUNNING CASING TO 8,206'
06:30	1.50	08:00	12	RUN CASING & CEMENT	CIRCULATE BOTTOMS UP 80 SPM 386 PSI 4849 TOTAL STKS CIRCULATE OUT GAS RIG DOWN CASING AND LAY DOWN CREWS
08:00	7.00	15:00	12	RUN CASING & CEMENT	S/M WITH ON R/U PUMP CEMENT HALLIBURTON TEST LINES PRESURE & TEST TO 5000 PSI PUMP H2O SPACER 2 BBLS PUMP SUPER FLUSH 40 BBLS PUMP 5 BBLS H2O PUMP LEAD CEMENT 271 BBLS @ 11# Y 2.32 GAL/SK 10.57 655 SKS PUMP TAIL CEMENT 139 BBLS 13# Y 1.43 GAL/SK 6.65 SHUT DOWN DROP PLUG DISPLACE 188.3 BBLS FINAL CIRC PRESSURE 1510 PSI BUMP PLUG 500 OVER HOLD FOR 3 MINS FLOATS HELD NO CEMENT BACK TO SURFACE
15:00	3.00	18:00	14	NIPPLE DOWN B.O.P	NIPPLE DOWN BOP/PU 130K 30K OVER ST. WT. SET SLIPS @ 130K/CUT OFF 5-1/2" PROD CSG
18:00	12.00	06:00	1	RIGUP & TEARDOWN	CLEAN PITS AND RIG DOWN RELEASE RIG @ 6:00 AM

5-7D-45 BTR 4/5/2013 06:00 - 4/6/2013 06:00

API/UWI	State/Province	County	Field Name	Well Status	Total Depth (ftKB)	Primary Job Type
43013513500000	UT	DUCHESNE	Black Tail Ridge	PRODUCING	8,206.0	Drilling & Completion

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	24.00	06:00	GOP	General Operations	CHECK PRESSURE. ND 11" NIGHT CAP. MAKE FINAL CUT. NU 7" 5K TBG HEAD. PRES TEST VOID AND SEALS.

5-7D-45 BTR 4/8/2013 06:00 - 4/9/2013 06:00

API/UWI	State/Province	County	Field Name	Well Status	Total Depth (ftKB)	Primary Job Type
43013513500000	UT	DUCHESNE	Black Tail Ridge	PRODUCING	8,206.0	Drilling & Completion

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	24.00	06:00	LOGG	Logging	MIRU SLB. RUN GR/JB TO TAG AT 8090', (FC 8116') HAVE 26' FILL. RUN CBL/CCL/GR LOG. SHORT JOINTS AT 5620'-5641', 6860'-6882', 7555'-7577'. MAX TEMP 203°. REPEAT PASS 8050-7850'. CMT BOND SHOWS FOOD CMT 8090'-7100', FAIR 7100'-6700', RATTY 6700'-6600', FAIR 6600'-6350', RATTY 6350'-6200', FAIR 6200'-5600', RATTY 5600'-5150', FAIR 5150'-4800', VERY POOR 4200'-2084'. TOC 2084'. RAN W/ PRESSURE. RDMO SLB AND FRONTIER.

5-7D-45 BTR 4/24/2013 06:00 - 4/25/2013 06:00

API/UWI	State/Province	County	Field Name	Well Status	Total Depth (ftKB)	Primary Job Type
43013513500000	UT	DUCHESNE	Black Tail Ridge	PRODUCING	8,206.0	Drilling & Completion

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	24.00	06:00	GOP	General Operations	HSM. CHECK PRESSURE. ND NIGHT CAP. NU FRAC MANDREL. NU 5" 10K FRAC VALVES. NU 5" 10K X 7" 5K DSA. SHUT WELL IN.

5-7D-45 BTR 4/27/2013 06:00 - 4/28/2013 06:00

API/UWI	State/Province	County	Field Name	Well Status	Total Depth (ftKB)	Primary Job Type
43013513500000	UT	DUCHESNE	Black Tail Ridge	PRODUCING	8,206.0	Drilling & Completion

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	24.00	06:00	GOP	General Operations	MIRU PINNACLE WIRELINE WITH SLB CRANE. HAVING ISSUES WITH CONNECTION TO TOOLS. UNABLE TO RIH. WORKING ON UNIT

5-7D-45 BTR 4/28/2013 06:00 - 4/29/2013 06:00

API/UWI	State/Province	County	Field Name	Well Status	Total Depth (ftKB)	Primary Job Type
43013513500000	UT	DUCHESNE	Black Tail Ridge	PRODUCING	8,206.0	Drilling & Completion



Bill Barrett Corporation

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	24.00	06:00	GOP	General Operations	ABLE TO GET TOOLS WORKING. PU ASSY AND RIH TO MONITORING DEPTH. BTM OF TOOLS AT 8028'. PERF STG 1 ON 8-12D-46. ABLE TO READ.

5-7D-45 BTR 4/29/2013 06:00 - 4/30/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	24.00	06:00	LOGG	Logging	MONITOR FRAC ON 8-12D-46. SET FB EQUIP

5-7D-45 BTR 4/30/2013 06:00 - 5/1/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	24.00	06:00	LOGG	Logging	PINNACLE IN HOLE MONITORING FRAC ON 8-12D-46. POOH AND LD TOOLS. ND DSA. NU FRAC HEAD. PLUMB IN FLOW BACK EQUIP. PRES TEST CSG, VAVLES, AND FB EQUIP.

5-7D-45 BTR 5/1/2013 06:00 - 5/2/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	24.00	06:00	GOP	General Operations	Filling Frac Line

5-7D-45 BTR 5/2/2013 06:00 - 5/3/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	24.00	06:00	GOP	General Operations	Finish Filling Frac Line.

5-7D-45 BTR 5/4/2013 06:00 - 5/5/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	24.00	06:00	GOP	General Operations	Heat KCL Water. HES Load And Mix Acid. Prep For Frac.

5-7D-45 BTR 5/5/2013 06:00 - 5/6/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	2.50	08:30	LOCL	Lock Wellhead & Secure	WSI And Secured. Wireline Crew Arrive On Location. Hold Safety Meeting. Rig Up Lubricator, Arm Gun.
08:30	1.00	09:30	PFRT	Perforating	RIH With 3 1/8" PJ Omega 3104 Perf. Gun Configured At 120 Degree Phasing, 3 Spf, .36" Penetration Charges, 16 Gms., .44 Dia. Holes. Correlating To HES Dual Spaced Neutron/Spectral Density Dated 03-29-2013 And SLB CBL/CCL Dated 04-08-2013. Found And Correlated To Short Joint At 7,555 - 7,577'. Drop Down To Depth, Perforate Stage 1 CR-4A/CR-4 Zone, 7,765 - 8,009'. 51 Holes. POOH. LayDown Gun, Verify All Shots Fired, WSI And Secured.
09:30	4.50	14:00	SRIG	Rig Up/Down	HES Rigging Up
14:00	16.00	06:00	LOCL	Lock Wellhead & Secure	WSI And Secured. SDFD.

5-7D-45 BTR 5/6/2013 06:00 - 5/7/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------



Bill Barrett Corporation

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	0.00	06:00	LOCL	Lock Wellhead & Secure	HES Crew On Location At 0400 Hrs., Prime Chemical And Fluid Pumps, Pressure Test To 9000 Psi., Ran QC On Fluid, Looks Good.
06:00	0.00	06:00	SMTG	Safety Meeting	Safety Meeting. Talk About Smoking Area, PPE, Escape And Mustering Areas, Communication, And Red Zone.
06:00	0.17	06:10	FRAC	Frac. Job	<p>Frac Stage 1. Fluid System: Hybor G 16 Open Well, 22 Psi. ICP. BrokeDown At 10.0 Bpm And 2,258 Psi.. Pump 3900 Gals. 15% HCL And 102 Bio Balls, Attempt BallOut. Let Balls Fall. Get Stabilized Injection Of 70.5 Bpm And 5,290 Psi., Get ISIP, 2,026 Psi.. 0.69 Psi./Ft. F.G.. 27/51 Holes. Con't With SlickWater Pad, 46,374 Gals.. Stage Into Hybor Pad, 72.9 Bpm At 4,010 Psi.. On Perfs, 70.3 Bpm At 4,104 Psi., 11,418 Gals. Stage Into 2.0# 20/40 White Prop, 72.6 Bpm At 4,331 Psi.. On Perfs, 68.9 Bpm At 3,903 Psi., 8,929 Gals. Stage Into 3.0# 20/40 White Prop, 68.8 Bpm At 3,976 Psi.. On Perfs, 70.8 Bpm At 3,259 Psi., 18,344 Gals. Stage Into 3.5# 20/40 White Prop, 70.9 Bpm At 3,212 Psi.. On Perfs, 70.9 Bpm At 3,072 Psi., 9,663 Gals. Stage Into 4.0# 20/40 White Prop, 72.2 Bpm At 3,150 Psi.. On Perfs, 72.4 Bpm At 3,049 Psi., 9,732 Gals. Stage Into Flush, Flush 15 Bbls. Over Bottom Perf.. Get ISDP, 2,376 Psi.. 0.74 Psi./Ft. F.G.. WSI And Secured. Total 20/40 White Prop - 136,280# Total Clean - 125,483 Gals.. 2,988 Bbls.. Produced Water - 65,428 Gals.. 2% KCL - 58,086 Gals.. BWTR - 3,142 Bbls. Max. Rate - 72.8 Bpm Avg. Rate - 71.2 Bpm Max. Psi. - 4,320 Psi. Avg. Psi. - 3,415 Psi.</p>
06:10	0.25	06:25	CTUW	W/L Operation	Well Turned Over To WireLine. Pick Up Gun String And CBP Plug Assembly. Equalize To Well Pressure.
06:25	0.92	07:20	PFRT	Perforating	<p>RIH With 3 1/8" PJ Omega 3104 Perf. Gun Configured At 120 Degree Phasing, 3 Spf, .36" Penetration Charges, 16 Gms., .44 Dia. Holes. Correlating To HES Dual Spaced Neutron/Spectral Density Dated 03-29-2013 And SLB CBL/CCL Dated 04-08-2013. Found And Correlated To Short Joint At 7,555 - 7,577'. Drop Down To Depth, Set CBP At 7,751'. 2,000 Psi. Perforate Stage 2 CR-4 Zone, 7,509 - 7,731'. 39 Holes. 2,000 Psi. POOH. LayDown Gun, Verify All Shots Fired, WSI And Secured.</p>
07:20	0.08	07:25	GOP	General Operations	Well Turned Over To HES. Pressure Test To 8500#. Equalize, Open To Well.
07:25	1.17	08:35	FRAC	Frac. Job	<p>Frac Stage 2. Fluid System: Hybor G 16 Open Well, 1,933 Psi. ICP. BrokeDown At 10.3 Bpm And 2,673 Psi.. Pump 3900 Gals. 15% HCL And 78 Bio Balls, Attempt BallOut. Let Balls Fall. Get Stabilized Injection Of 73.2 Bpm And 4,708 Psi., Get ISIP, 2,292 Psi.. 0.74 Psi./Ft. F.G.. 36/39 Holes. Con't With SlickWater Pad, 48,246 Gals.. Stage Into Hybor Pad, 72.0 Bpm At 3,996 Psi.. On Perfs, 70.4 Bpm At 4,162 Psi., 12,235 Gals. Stage Into 2.0# 20/40 White Prop, 70.4 Bpm At 4,175 Psi.. On Perfs, 70.3 Bpm At 3,769 Psi., 8,411 Gals. Stage Into 3.0# 20/40 White Prop, 70.3 Bpm At 3,755 Psi.. On Perfs, 70.4 Bpm At 3,267 Psi., 22,485 Gals. Stage Into 3.5# 20/40 White Prop, 70.4 Bpm At 3,141 Psi.. On Perfs, 70.6 Bpm At 3,058 Psi., 9,327 Gals. Stage Into 4.0# 20/40 White Prop, 70.6 Bpm At 3,062 Psi.. On Perfs, 70.7 Bpm At 2,990 Psi., 10,294 Gals. Stage Into Flush, Flush 15 Bbls. Over Bottom Perf.. Get ISDP, 2,463 Psi.. 0.75 Psi./Ft. F.G.. WSI And Secured. Total 20/40 White Prop - 150,800# Total Clean - 131,538 Gals.. 3,132 Bbls.. Produced Water - 66,664 Gals.. 2% KCL - 62,752 Gals.. BWTR - 3,304 Bbls. Max. Rate - 72.6 Bpm Avg. Rate - 70.4 Bpm Max. Psi. - 4,144 Psi. Avg. Psi. - 3,268 Psi.</p>



Bill Barrett Corporation

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
08:35	0.17	08:45	CTUW	W/L Operation	Well Turned Over To WireLine. Pick Up Gun String And CBP Plug Assembly. Equalize To Well Pressure.
08:45	1.00	09:45	PFRT	Perforating	RIH With 3 1/8" PJ Omega 3104 Perf. Gun Configured At 120 Degree Phasing, 3 Spf, .36" Penetration Charges, 16 Gms., .44 Dia. Holes. Correlating To HES Dual Spaced Neutron/Spectral Density Dated 03-29-2013 And SLB CBL/CCL Dated 04-08-2013. Found And Correlated To Short Joint At 6,842 - 6,866'. Drop Down To Depth, Set CBP At 7,500'. 2,100 Psi. Perforate Stage 3 CR-3 Zone, 7,221 - 7,480'. 45 Holes. 2,000 Psi. POOH. LayDown Gun, Verify All Shots Fired, WSI And Secured.
09:45	0.08	09:50	GOP	General Operations	Well Turned Over To HES. Pressure Test To 8500#. Equalize, Open To Well.
09:50	1.08	10:55	FRAC	Frac. Job	Frac Stage 3. Fluid System: Hybor G 16 Open Well, 1,980 Psi. ICP. BrokeDown At 10.4 Bpm And 2,230 Psi.. Pump 3900 Gals. 15% HCL And 90 Bio Balls, Attempt BallOut. Let Balls Fall. Get Stabilized Injection Of 71.5 Bpm And 4,430 Psi., Get ISIP, 2,130 Psi.. 0.73 Psi./Ft. F.G.. 33/45 Holes. Con't With SlickWater Pad, 48,544 Gals.. Stage Into Hybor Pad, 71.2 Bpm At 3,883 Psi.. On Perfs, 71.0 Bpm At 4,164 Psi., 12,221 Gals. Stage Into 2.0# 20/40 White Prop, 72.7 Bpm At 4,207 Psi.. On Perfs, 72.6 Bpm At 3,770 Psi., 8,150 Gals. Stage Into 3.0# 20/40 White Prop, 72.7 Bpm At 3,755 Psi.. On Perfs, 72.9 Bpm At 3,249 Psi., 23,386 Gals. Stage Into 3.5# 20/40 White Prop, 73.0 Bpm At 3,141 Psi.. On Perfs, 73.0 Bpm At 3,060 Psi., 9,098 Gals. Stage Into 4.0# 20/40 White Prop, 72.9 Bpm At 3,041 Psi.. On Perfs, 73.0 Bpm At 3,005 Psi., 9,343 Gals. Stage Into Flush, Flush 15 Bbls. Over Bottom Perf.. Get ISDP, 2,211 Psi.. 0.74 Psi./Ft. F.G.. WSI And Secured. Total 20/40 White Prop - 150,100# Total Clean - 130,574 Gals.. 3,109 Bbls.. Produced Water - 66,394 Gals.. 2% KCL - 62,198 Gals.. BWTR - 3,258 Bbls. Max. Rate - 73.5 Bpm Avg. Rate - 72.9 Bpm Max. Psi. - 4,241 Psi. Avg. Psi. - 3,274 Psi.
10:55	0.17	11:05	CTUW	W/L Operation	Well Turned Over To WireLine. Pick Up Gun String And CBP Plug Assembly. Equalize To Well Pressure.
11:05	1.00	12:05	PFRT	Perforating	RIH With 3 1/8" PJ Omega 3104 Perf. Gun Configured At 120 Degree Phasing, 3 Spf, .36" Penetration Charges, 16 Gms., .44 Dia. Holes. Correlating To HES Dual Spaced Neutron/Spectral Density Dated 03-29-2013 And SLB CBL/CCL Dated 04-08-2013. Found And Correlated To Short Joint At 6,842 - 6,866'. Drop Down To Depth, Set CBP At 7,216'. 2,050 Psi. Perforate Stage 4 CR-2/Wasatch Zone, 6,937 - 7,198'. 51 Holes. 1,850 Psi. POOH. LayDown Gun, Verify All Shots Fired, WSI And Secured.
12:05	0.08	12:10	GOP	General Operations	Well Turned Over To HES. Pressure Test To 8500#. Equalize, Open To Well.



Bill Barrett Corporation

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
12:10	1.08	13:15	FRAC	Frac. Job	<p>Frac Stage 4. Fluid System: Hybor G 16 Open Well, 1,840 Psi. ICP. BrokeDown At 10.0 Bpm And 2,219 Psi.. Pump 3900 Gals. 15% HCL And 102 Bio Balls, Attempt BallOut. Let Balls Fall. Get Stabilized Injection Of 71.6 Bpm And 4,405 Psi., Get ISIP, 1,692 Psi.. 0.68 Psi./Ft. F.G.. 31/51 Holes. Con't With SlickWater Pad, 48,525 Gals.. Stage Into Hybor Pad, 71.4 Bpm At 3,514 Psi.. On Perfs, 71.5 Bpm At 3,709 Psi., 12,262 Gals. Stage Into 2.0# 20/40 White Prop, 71.5 Bpm At 3,776 Psi.. On Perfs, 70.5 Bpm At 3,342 Psi., 7,948 Gals. Stage Into 3.0# 20/40 White Prop, 70.6 Bpm At 3,292 Psi.. On Perfs, 70.7 Bpm At 2,824 Psi., 24,215 Gals. Stage Into 3.5# 20/40 White Prop, 70.9 Bpm At 2,665 Psi.. On Perfs, 70.8 Bpm At 2,707 Psi., 8,842 Gals. Stage Into 4.0# 20/40 White Prop, 70.8 Bpm At 2,717 Psi.. On Perfs, 70.7 Bpm At 2,679 Psi., 10,636 Gals. Stage Into Flush, Flush 15 Bbls. Over Bottom Perf.. Get ISDP, 1,931 Psi.. 0.71 Psi./Ft. F.G.. WSI And Secured. Total 20/40 White Prop - 152,980# Total Clean - 131,875 Gals.. 3,140 Bbls.. Produced Water - 65,930 Gals.. 2% KCL - 63,903 Gals.. BWTR - 3,299 Bbls. Max. Rate - 72.0 Bpm Avg. Rate - 70.7 Bpm Max. Psi. - 3,784 Psi. Avg. Psi. - 2,862 Psi.</p>
13:15	0.17	13:25	CTUW	W/L Operation	Well Turned Over To WireLine. Pick Up Gun String And CBP Plug Assembly. Equalize To Well Pressure.
13:25	0.92	14:20	PFRT	Perforating	<p>RIH With 3 1/8" PJ Omega 3104 Perf. Gun Configured At 120 Degree Phasing, 3 Spf, .36" Penetration Charges, 16 Gms., .44 Dia. Holes. Correlating To HES Dual Spaced Neutron/Spectral Density Dated 03-29-2013 And SLB CBL/CCL Dated 04-08-2013. Found And Correlated To Short Joint At 5,606 - 5,626'. Drop Down To Depth, Set CBP At 6,925'. 1,750 Psi. Perforate Stage 5 CR-1A/CR-1/UteLand Butte Zone, 6,718 - 6,912'. 45 Holes. 1,600 Psi. POOH. LayDown Gun, Verify All Shots Fired, WSI And Secured.</p>
14:20	0.08	14:25	GOP	General Operations	Well Turned Over To HES. Pressure Test To 8500#. Equalize, Open To Well.
14:25	0.33	14:45	FRAC	Frac. Job	<p>Acidize Stage 5. Open Well, 1,613 Psi. ICP. BrokeDown At 15.8 Bpm And 2,101 Psi.. Pump 15,000 Gals. 15% HCL Drop 90 Bio Balls. Flush With 2% KCL To 15 Bbls. Over Bottom Perf. Volume. Get ISDP, 1,694 Psi.. 0.69 Psi./Ft. F.G.. WSI And Secured. Total Clean - 23,500 Gals.. 560 Bbls.. BWTR - 560 Bbls. Max. Rate - 50.9 Bpm Avg. Rate - 36.8 Bpm Max. Psi. - 7,687 Psi. Avg. Psi. - 3,363 Psi.</p>
14:45	0.17	14:55	CTUW	W/L Operation	Well Turned Over To WireLine. Pick Up Gun String And CBP Plug Assembly. Equalize To Well Pressure.
14:55	0.92	15:50	PFRT	Perforating	<p>RIH With 3 1/8" PJ Omega 3104 Perf. Gun Configured At 120 Degree Phasing, 3 Spf, .36" Penetration Charges, 16 Gms., .44 Dia. Holes. Correlating To HES Dual Spaced Neutron/Spectral Density Dated 03-29-2013 And SLB CBL/CCL Dated 04-08-2013. Found And Correlated To Short Joint At 5,606 - 5,626'. Drop Down To Depth, Set CBP At 6,712'. 1,600 Psi. Perforate Stage 6 Castle Peak Zone, 6,539 - 6,698'. 45 Holes. 1,450 Psi. POOH. LayDown Gun, Verify All Shots Fired, WSI And Secured.</p>
15:50	14.17	06:00	LOCL	Lock Wellhead & Secure	WSI And Secured. SDFD.

5-7D-45 BTR 5/7/2013 06:00 - 5/8/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	0.00	06:00	LOCL	Lock Wellhead & Secure	HES Crew On Location At 0400 Hrs., Prime Chemical And Fluid Pumps, Pressure Test To 9000 Psi., Ran QC On Fluid, Looks Good.

**Time Log**

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	0.00	06:00	SMTG	Safety Meeting	Safety Meeting. Talk About Smoking Area, PPE, Escape And Mustering Areas, Communication, And Red Zone.
06:00	0.00	06:00	FRAC	Frac. Job	Acidize Stage 6. Open Well, 1,376 Psi. ICP. BrokeDown At 25.8 Bpm And 2,330 Psi.. Pump 15,000 Gals. 15% HCL Drop 90 Bio Balls. Flush With 2% KCL To 15 Bbls. Over Bottom Perf. Volume. Get ISDP, 1,535 Psi.. 0.67 Psi./Ft. F.G.. WSI And Secured. Total Clean - 22,872 Gals.. 545 Bbls.. BWTR - 545 Bbls. Max. Rate - 51.5 Bpm Avg. Rate - 44.6 Bpm Max. Psi. - 3,899 Psi. Avg. Psi. - 2,621 Psi.
06:00	0.00	06:00	CTUW	W/L Operation	Well Turned Over To WireLine. Pick Up Gun String And CBP Plug Assembly. Equalize To Well Pressure.
06:00	0.83	06:49	PFRT	Perforating	RIH With 3 1/8" PJ Omega 3104 Perf. Gun Configured At 120 Degree Phasing, 3 Spf, .36" Penetration Charges, 16 Gms., .44 Dia. Holes. Correlating To HES Dual Spaced Neutron/Spectral Density Dated 03-29-2013 And SLB CBL/CCL Dated 04-08-2013. Found And Correlated To Short Joint At 5,606 - 5,626'. Drop Down To Depth, Set CBP At 6,532'. 1,400 Psi. Perforate Stage 7 Castle Peak/Black Shale Zone, 6,347 - 6,510'. 36 Holes. 850 Psi. POOH. LayDown Gun, Verify All Shots Fired, WSI And Secured.
06:49	0.17	07:00	GOP	General Operations	Well Turned Over To HES. Pressure Test To 8500#. Equalize, Open To Well.
07:00	0.25	07:15	FRAC	Frac. Job	Acidize Stage 7. Open Well, 850 Psi. ICP. BrokeDown At 12.5 Bpm And 1,307 Psi.. Pump 15,000 Gals. 15% HCL Drop 90 Bio Balls. Flush With 2% KCL To 15 Bbls. Over Bottom Perf. Volume. Get ISDP, 1,106 Psi.. 0.61 Psi./Ft. F.G.. WSI And Secured. Total Clean - 22,693 Gals.. 540 Bbls.. BWTR - 540 Bbls. Max. Rate - 51.7 Bpm Avg. Rate - 38.1 Bpm Max. Psi. - 4,796 Psi. Avg. Psi. - 2,149 Psi.
07:15	0.25	07:30	CTUW	W/L Operation	Well Turned Over To WireLine. Pick Up CBP Plug Assembly. Equalize To Well Pressure.
07:30	0.75	08:15	PFRT	Perforating	RIH With 3 1/8" Sinker Bar And CBP Plug Assembly. Correlating To HES Dual Spaced Neutron/Spectral Density Dated 03-29-2013 And SLB CBL/CCL Dated 04-08-2013. Found And Correlated To Short Joint At 5,606 - 5,626'. Drop Down To Depth, Set CBP At 6,275'. 900 Psi. Bleed Pressure Off Well. POOH. LayDown Tools, WSI And Secured.
08:15	3.75	12:00	SRIG	Rig Up/Down	RigDown WireLine And Frac Crews, MOL.
12:00	18.00	06:00	LOCL	Lock Wellhead & Secure	WSI And Secured. Batch Water, Move Tanks Off Location.

5-7D-45 BTR 5/8/2013 06:00 - 5/9/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	1.00	07:00	CTRL	Crew Travel	CREW TRAVEL.
07:00	1.50	08:30	RMOV	Rig Move	ROAD RIG TO LOCATION. SPOT AND RUSU.
08:30	1.00	09:30	BOPI	Install BOP's	JSA. CHECK PRESSURE. ND FRAC VALVES. NU BOP AND HYDRIL. RU FLOOR.
09:30	1.50	11:00	GOP	General Operations	SPOT CATWALK AND RACKS. UNLOAD AND PREP 268-JTS 2-7/8" L-80 TBG.
11:00	2.50	13:30	RUTB	Run Tubing	MU AND RIH W/ 4-3/4" BIT, POBS, 1-JT, 2.31 XN AND 196-JTS TO TAG KILL PLUG.
13:30	1.00	14:30	GOP	General Operations	RU PWR SWIVEL. FILL TBG. PRES TEST HYDRIL TO 1500 PSI, AND PIPE RAMS TO 2500 PSI. GOOD.

**Time Log**

Start Time	Dur (hr)	End Time	Code	Category	Com
14:30	2.50	17:00	DOPG	Drill Out Plugs	EST CIRC AND D/O PLUGS. CBP #1 AT 6275'. 0' SAND. D/O IN 10 MIN. FCP 300 ON 36/64". RIH CBP #2 AT 6532'. 0' SAND. D/O IN 8 MIN. FCP 250 ON 36/64". RIH. CBP #3 AT 6712'. 0' SAND. D/O IN 8 MIN. FCP 800 ON 36/64". RIH. CBP #4 AT 6932'. 0' SAND. D/O IN 9 MIN. FCP 800 ON 32/64". CIRC CLEAN. PULL 1-JT. HAVE 217-JTS IN. EOT AT 6907'.
17:00	13.00	06:00	FBCK	Flowback Well	CREW TRAVEL. WELL TURNED TO PROD FOR NIGHT.

5-7D-45 BTR 5/9/2013 06:00 - 5/10/2013 06:00

API/UWI 43013513500000	State/Province UT	County DUCHESNE	Field Name Black Tail Ridge	Well Status PRODUCING	Total Depth (ftKB) 8,206.0	Primary Job Type Drilling & Completion
---------------------------	----------------------	--------------------	--------------------------------	--------------------------	-------------------------------	-------------------------------------------

Time Log

Start Time	Dur (hr)	End Time	Code	Category	Com
06:00	1.00	07:00	CTRL	Crew Travel	CREW TRAVEL.
07:00	3.50	10:30	DOPG	Drill Out Plugs	WELL FLOWING OVERNIGHT. 350 PSI ON 22/64" CHOKE. OPEN TO FBT. RIH AS D/O PLUGS. CBP #5 AT 7216'. 18' SAND. D/O IN 12 MIN. FCP 600 ON 26/64. RIH CBP #6 AT 7500'. 30' SAND. D/O IN 10 MIN. FCP 500 ON 28/64. RIH CBP #7 AT 7751'. 18' SAND. D/O IN 15 MIN. FCP 500 ON 38/64. RIH C/O 159' SAND TO FC AT 8116'. D/O FC AND 8' CMT TO 8126' W/ 255-JTS IN.
10:30	1.50	12:00	CTU	Clean Out	CIRC CLEAN (300 BBLS). RD PWR SWIVEL.
12:00	1.00	13:00	PULT	Pull Tubing	POOH AS LD 59-JTS TBG. PU 7" 5K HANGER. LUBE IN AND LAND TBG. TBG DETAIL KB HANGER 195-JTS 2-7/8" TBG 2.31 XN NIPPLE 1-JT 2-7/8" TBG POBS EOT AT 6250.27
13:00	1.50	14:30	BOPR	Remove BOP's	RD FLOOR. ND BOP. NU WH. PLUMB IN FLOW LINES. POBS AT # 1800. RDSU. TURN OVER TO FBC AND PRODUCTION.
14:30	2.00	16:30	RMOV	Rig Move	ROAD RIG TOWARDS 9-10-3-2
16:30	13.50	06:00	FBCK	Flowback Well	WELL TURNED OVER TO FBC AND SALES.

Effective Date: 11/1/2016

FORMER OPERATOR:	NEW OPERATOR:
Bill Barrett Corporation 1099 18th Street, Suite 2300 Denver, CO 80202	Rig II, LLC 1582 West 2600 South Woods Cross, UT 84087
CA Number(s):	Unit(s):

WELL INFORMATION:

Well Name	Sec	TWN	RNG	API	Entity	Mineral	Surface	Type	Status
See Attached List									

OPERATOR CHANGES DOCUMENTATION:

1. Sundry or legal documentation was received from the **FORMER** operator on: 10/21/2016
2. Sundry or legal documentation was received from the **NEW** operator on: 10/21/2016
3. New operator Division of Corporations Business Number: 8256968-0160

REVIEW:

1. Surface Agreement Sundry from **NEW** operator on Fee Surface wells received on: N/A
2. Receipt of Acceptance of Drilling Procedures for APD on: 10/21/2016
3. Reports current for Production/Disposition & Sundries: 11/2/2016
4. OPS/SI/TA well(s) reviewed for full cost bonding: 11/3/2016
5. UIC5 on all disposal/injection/storage well(s) approved on: 11/3/2016
6. Surface Facility(s) included in operator change: None
7. Inspections of PA state/fee well sites complete on (only upon operators request): 11/3/2016

NEW OPERATOR BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: UTB000712
2. Indian well(s) covered by Bond Number: LPM 922467
3. State/fee well(s) covered by Bond Number(s): 9219529

DATA ENTRY:

1. Well(s) update in the **OGIS** on: 11/7/2016
2. Entity Number(s) updated in **OGIS** on: 11/7/2016
3. Unit(s) operator number update in **OGIS** on: N/A
4. Surface Facilities update in **OGIS** on: N/A
5. State/Fee well(s) attached to bond(s) in **RBDMS** on: 11/7/2016
6. Surface Facilities update in **RBDMS** on: N/A

COMMENTS:

From: Bill Barrett Corporation

To: Rig II, LLC

Effective 11/1/2016

Well Name	Sec	TWN	RNG	API Number	Entity	Mineral	Surface	Type	Status
SWD 9-36 BTR	9	030S	060W	4301350646	18077	Indian	Fee	WD	A
16-6D-46 BTR SWD	6	040S	060W	4301350781	18327	Indian	Fee	WD	A
6-32-36 BTR SWD	32	030S	060W	4301350921	18329	Indian	Fee	WD	A
LC TRIBAL 8-26D-47	26	040S	070W	4301334024		Indian	Indian	OW	APD
16-21D-37 BTR	21	030S	070W	4301350758		Indian	Fee	OW	APD
14-11D-37 BTR	11	030S	070W	4301350862		Indian	Fee	OW	APD
7-17D-46 BTR	17	040S	060W	4301350883		Indian	Indian	OW	APD
14-12D-37 BTR	12	030S	070W	4301350894		Indian	Fee	OW	APD
1-18D-36 BTR	18	030S	060W	4301350922		Indian	Fee	OW	APD
13-2D-45 BTR	2	040S	050W	4301350931		Indian	Indian	OW	APD
5H-16-46 BTR	16	040S	060W	4301350992		Indian	Indian	OW	APD
9H-17-45 BTR	17	040S	050W	4301351098		Indian	Indian	OW	APD
13H-8-46 BTR UB	8	040S	060W	4301351124		Indian	Indian	OW	APD
8H-9-46 BTR	9	040S	060W	4301351140		Indian	Indian	OW	APD
LC TRIBAL 7-31D-37	31	030S	070W	4301351147		Indian	Fee	OW	APD
14-16D-45 BTR	16	040S	050W	4301351178		Indian	Indian	OW	APD
16-19D-37 BTR	19	030S	070W	4301351179		Indian	Fee	OW	APD
6-2D-45 BTR	2	040S	050W	4301351234		Indian	Indian	OW	APD
2-2D-45 BTR	2	040S	050W	4301351235		Indian	Indian	OW	APD
10-26-35 BTR	26	030S	050W	4301351248		Indian	Fee	OW	APD
LC TRIBAL 1H-33-46	33	040S	060W	4301351257		Indian	Fee	OW	APD
LC TRIBAL 9-25D-46	25	040S	060W	4301351276		Indian	Indian	OW	APD
LC TRIBAL 8H-30-45	30	040S	050W	4301351277		Indian	Indian	OW	APD
LC TRIBAL 16H-30-45	30	040S	050W	4301351279		Indian	Indian	OW	APD
LC TRIBAL 13-30D-45	30	040S	050W	4301351282		Indian	Indian	OW	APD
LC TRIBAL 16H-36-46	36	040S	060W	4301351291		Indian	Indian	OW	APD
LC TRIBAL 13H-30-46	30	040S	060W	4301351321		Indian	Indian	OW	APD
LC TRIBAL 13H-31-46	31	040S	060W	4301351326		Indian	Indian	OW	APD
LC TRIBAL 16-31D-46	31	040S	060W	4301351328		Indian	Indian	OW	APD
LC TRIBAL 5H-26-47	26	040S	070W	4301351337		Indian	Indian	OW	APD
LC TRIBAL 5H-19-45	20	040S	050W	4301351349		Indian	Indian	OW	APD
LC TRIBAL 16-36D-47	36	040S	070W	4301351363		Indian	Indian	OW	APD
15-4D-47 BTR	4	040S	070W	4301351377		Indian	Fee	OW	APD
16-23D-46 LC TRIBAL	23	040S	060W	4301351396		Indian	Fee	OW	APD
15-2D-36 BTR	2	030S	060W	4301351419		Indian	Fee	OW	APD
16-23D-37 BTR	23	030S	070W	4301351420		Indian	Fee	OW	APD
11-9D-47 BTR	9	040S	070W	4301351422		Indian	Fee	OW	APD
15-13D-47 BTR	13	040S	070W	4301351424		Indian	Indian	OW	APD
LC TRIBAL 15-19D-46	19	040S	060W	4301351426		Indian	Indian	OW	APD
16-13D-45 BTR	13	040S	050W	4301351428		Indian	Indian	OW	APD

From: Bill Barrett Corporation

To: Rig II, LLC

Effective 11/1/2016

14-12D-45 BTR	12	040S	050W	4301351444		Indian	Indian	OW	APD
16-14D-45 BTR	14	040S	050W	4301351445		Indian	Indian	OW	APD
5-13D-45 BTR	13	040S	050W	4301351446		Indian	Indian	OW	APD
LC TRIBAL 16-26D-46	26	040S	060W	4301351450		Indian	State	OW	APD
LC TRIBAL 16-34D-46	34	040S	060W	4301351451		Indian	State	OW	APD
16-12D-45 BTR	12	040S	050W	4301351452		Indian	Indian	OW	APD
8-12D-45 BTR	12	040S	050W	4301351453		Indian	Indian	OW	APD
LC TRIBAL 1-35D-46	35	040S	060W	4301351454		Indian	Fee	OW	APD
16-25D-37 BTR	25	030S	070W	4301351455		Indian	Fee	OW	APD
LC TRIBAL 13H-29-46	28	040S	060W	4301351462		Indian	Fee	OW	APD
LC TRIBAL 14-30D-37	30	030S	070W	4301351494		Indian	Fee	OW	APD
7-13D-45 BTR	13	040S	050W	4301351497		Indian	Indian	OW	APD
LC TRIBAL 4H-35-46	35	040S	060W	4301351515		Indian	Fee	OW	APD
LC TRIBAL 13H-19-46	19	040S	060W	4301351543		Indian	Indian	OW	APD
16-26D-37 BTR	26	030S	070W	4301351598		Indian	Fee	OW	APD
LC TRIBAL 16-31D-37	31	030S	070W	4301351610		Indian	Fee	OW	APD
5-4-35 BTR	4	030S	050W	4301351613		Indian	Fee	OW	APD
LC TRIBAL 16-31D-47	31	040S	070W	4301351616		Indian	Indian	OW	APD
LC TRIBAL 13H-31-47	31	040S	070W	4301351617		Indian	Indian	OW	APD
LC TRIBAL 13-32D-47	32	040S	070W	4301351619		Indian	Indian	OW	APD
LC TRIBAL 16H-32-47	32	040S	070W	4301351620		Indian	Indian	OW	APD
LC TRIBAL 1-32D-47	32	040S	070W	4301351624		Indian	Indian	OW	APD
LC TRIBAL 4H-32-47	32	040S	070W	4301351625		Indian	Indian	OW	APD
LC TRIBAL 13-28D-47	28	040S	070W	4301351627		Indian	Indian	OW	APD
LC TRIBAL 13H-29-47	28	040S	070W	4301351628		Indian	Indian	OW	APD
LC TRIBAL 16H-28-47	28	040S	070W	4301351629		Indian	Indian	OW	APD
LC TRIBAL 1-28D-47	28	040S	070W	4301351639		Indian	Indian	OW	APD
LC TRIBAL 1H-27-47	28	040S	070W	4301351640		Indian	Indian	OW	APD
LC TRIBAL 4H-28-47	28	040S	070W	4301351641		Indian	Indian	OW	APD
LC TRIBAL 7-25D-58	25	050S	080W	4301351643		Indian	Indian	OW	APD
LC TRIBAL 6-25D-58	25	050S	080W	4301351644		Indian	Indian	OW	APD
LC TRIBAL 13H-24-58	24	050S	080W	4301351645		Indian	Indian	OW	APD
LC TRIBAL 16-24D-58	24	050S	080W	4301351646		Indian	Indian	OW	APD
LC Tribal 8-23D-46	23	040S	060W	4301351654		Indian	Fee	OW	APD
LC Tribal 16-35D-45	35	040S	050W	4301351656		Indian	Fee	OW	APD
LC Tribal 13H-35-45	35	040S	050W	4301351657		Indian	Fee	OW	APD
LC Tribal 16-36D-45	36	040S	050W	4301351658		Indian	Fee	OW	APD
LC Tribal 13H-36-45	36	040S	050W	4301351659		Indian	Fee	OW	APD
LC Tribal 5-36D-45	36	040S	050W	4301351661		Indian	Fee	OW	APD
LC Tribal 8-26D-46	26	040S	060W	4301351663		Indian	Fee	OW	APD
3-29D-36 BTR	29	030S	060W	4301351665		Indian	Fee	OW	APD

From: Bill Barrett Corporation

To: Rig II, LLC

Effective 11/1/2016

LC Tribal 5-35D-45	35	040S	050W	4301351666	Indian	Fee	OW	APD
LC Tribal 5-24D-46	24	040S	060W	4301351668	Indian	Indian	OW	APD
LC TRIBAL 6-12D-58	12	050S	080W	4301351696	Indian	Indian	OW	APD
LC TRIBAL 8-12D-58	12	050S	080W	4301351697	Indian	Indian	OW	APD
LC TRIBAL 16H-22-47	21	040S	070W	4301351700	Indian	Indian	OW	APD
5-25D-37 BTR	25	030S	070W	4301351803	Indian	Fee	OW	APD
8-3D-36 BTR	3	030S	060W	4301351804	Indian	Fee	OW	APD
14-26D-37 BTR	26	030S	070W	4301351805	Indian	Fee	OW	APD
9-4-35 BTR	4	030S	050W	4301351806	Indian	Fee	OW	APD
11-4D-35 BTR	4	030S	050W	4301351807	Indian	Fee	OW	APD
16-27D-37 BTR	27	030S	070W	4301351808	Indian	Fee	OW	APD
14-27D-37 BTR	27	030S	070W	4301351809	Indian	Fee	OW	APD
14-16D-46 BTR	16	040S	060W	4301351812	Indian	Indian	OW	APD
LC Tribal 16-35D-48	35	040S	080W	4301351847	Indian	Indian	OW	APD
LC Tribal 13H-35-48	35	040S	080W	4301351848	Indian	Indian	OW	APD
LC Tribal 13-2D-58	11	050S	080W	4301351850	Indian	Indian	OW	APD
5-13D-36 BTR	13	030S	060W	4301351862	Indian	Fee	OW	APD
5-8D-36 BTR	8	030S	060W	4301351871	Indian	Fee	OW	APD
16-1D-36 BTR	1	030S	060W	4301351872	Indian	Fee	OW	APD
8-18D-46 BTR	18	040S	060W	4301351897	Indian	Fee	OW	APD
LC Tribal 5-36D-46	36	040S	060W	4301351905	Indian	Indian	OW	APD
LC Tribal 5-26D-45	26	040S	050W	4301351907	Indian	Indian	OW	APD
14-13D-45 BTR	13	040S	050W	4301351974	Indian	Indian	OW	APD
14-34D-46 DLB	34	040S	060W	4301351975	Indian	Fee	OW	APD
LC Tribal 5-21D-45	21	040S	050W	4301352001	Indian	Indian	OW	APD
LC Tribal 8-22D-45	22	040S	050W	4301352002	Indian	Indian	OW	APD
LC Tribal 8-25D-45	25	040S	050W	4301352007	Indian	Indian	OW	APD
LC Tribal 16-25D-45	25	040S	050W	4301352008	Indian	Indian	OW	APD
LC Tribal 16-22D-45	22	040S	050W	4301352009	Indian	Indian	OW	APD
LC Tribal 16-26D-45	26	040S	050W	4301352010	Indian	Indian	OW	APD
LC Tribal 14-31D-37	31	030S	070W	4301352016	Indian	Fee	OW	APD
5-12D-45 BTR	12	040S	050W	4301352030	Indian	Indian	OW	APD
LC Tribal 9-20D-45	20	040S	050W	4301352031	Indian	Indian	OW	APD
LC Tribal 13-35D-47	35	040S	070W	4301352055	Indian	Indian	OW	APD
LC Tribal 1-23D-47	23	040S	070W	4301352057	Indian	Indian	OW	APD
9-17D-46 BTR	17	040S	060W	4301352059	Indian	Indian	OW	APD
11-18D-46 BTR	18	040S	060W	4301352060	Indian	Indian	OW	APD
9-10D-47 BTR	10	040S	070W	4301352092	Indian	Fee	OW	APD
LC Tribal 1-17D-47	17	040S	070W	4301352096	Indian	Fee	OW	APD
7-35D-37 BTR	35	030S	070W	4301352115	Indian	Fee	OW	APD
14-25D-37 BTR	25	030S	070W	4301352116	Indian	Fee	OW	APD

From: Bill Barrett Corporation

To: Rig II, LLC

Effective 11/1/2016

LC Tribal 5-25-46	25	040S	060W	4301352126	Indian	Indian	OW	APD
8-33D-35 BTR	33	030S	050W	4301352161	Indian	Fee	OW	APD
5-4D-36 BTR	4	030S	060W	4301352175	Indian	Fee	OW	APD
7-4D-36 BTR	4	030S	060W	4301352176	Indian	Fee	OW	APD
LC Tribal 4-36D-47	36	040S	070W	4301352186	Indian	Indian	OW	APD
LC Tribal 4-22D-46	22	040S	060W	4301352944	Indian	Indian	OW	APD
LC Tribal 16-22D-46	22	040S	060W	4301352945	Indian	Indian	OW	APD
LC Tribal 11-19D-46	19	040S	060W	4301352946	Indian	Indian	OW	APD
LC Tribal 7-20D-45	20	040S	050W	4301352947	Indian	Indian	OW	APD
15-11D-35 BTR	11	030S	050W	4301353056	Indian	Fee	OW	APD
13-11D-35 BTR	11	030S	050W	4301353057	Indian	Fee	OW	APD
BTR 16-36D-37	36	030S	070W	4301353059	Indian	Fee	OW	APD
4-29D-35 BTR	30	030S	050W	4301353060	Indian	Fee	OW	APD
1-30D-35 BTR	30	030S	050W	4301353061	Fee	Fee	OW	APD
LC TRIBAL 3-23D-46	23	040S	060W	4301353066	Indian	State	OW	APD
LC Tribal 14-23D-46	23	040S	060W	4301353067	Indian	State	OW	APD
LC Tribal 13-25D-46	25	040S	060W	4301353068	Indian	Indian	OW	APD
LC Tribal 14-26D-46	26	040S	060W	4301353069	Indian	State	OW	APD
LC Tribal 5-26D-46	26	040S	060W	4301353070	Indian	State	OW	APD
LC Tribal 11-35D-45	35	040S	050W	4301353071	Indian	State	OW	APD
LC Tribal 7-35D-45	35	040S	050W	4301353072	Indian	State	OW	APD
LC Tribal 3-35D-45	35	040S	050W	4301353075	Indian	State	OW	APD
LC Tribal 14-36D-45	36	040S	050W	4301353076	Indian	State	OW	APD
LC Tribal 13-36D-45	36	040S	050W	4301353077	Indian	State	OW	APD
LC Tribal 10-36D-45	36	040S	050W	4301353078	Indian	State	OW	APD
LC Tribal 8-36D-45	36	040S	050W	4301353079	Indian	State	OW	APD
LC Tribal 6-36D-45	36	040S	050W	4301353080	Indian	State	OW	APD
LC Tribal 1-34D-46	34	040S	060W	4301353081	Indian	State	OW	APD
LC Tribal 9-27D-46	27	040S	060W	4301353082	Indian	State	OW	APD
LC Tribal 13-35D-45	35	040S	050W	4301353083	Indian	State	OW	APD
LC Tribal 8-35D-45	35	040S	050W	4301353084	Indian	State	OW	APD
LC Tribal 15-35D-45	35	040S	050W	4301353085	Indian	State	OW	APD
LC Tribal 12-25D-45	25	040S	050W	4301353122	Indian	Indian	OW	APD
LC Tribal 14-25D-45	25	040S	050W	4301353123	Indian	Indian	OW	APD
LC Tribal 10-25D-45	25	040S	050W	4301353124	Indian	Indian	OW	APD
LC Tribal 11-26-45	26	040S	050W	4301353125	Indian	Indian	OW	APD
LC Tribal 13-26D-45	26	040S	050W	4301353126	Indian	Indian	OW	APD
LC Tribal 7-31D-46	31	040S	060W	4301353127	Indian	Indian	OW	APD
LC Tribal 7-19D-45	19	040S	050W	4301353128	Indian	Indian	OW	APD
LC Tribal 5-19D-45	19	040S	050W	4301353130	Indian	Indian	OW	APD
LC Tribal 7-25D-46	25	040S	060W	4301353132	Indian	Indian	OW	APD

From: Bill Barrett Corporation

To: Rig II, LLC

Effective 11/1/2016

LC Tribal 7-24D-46	24	040S	060W	4301353134		Indian	Indian	OW	APD
LC Tribal 14-31D-46	31	040S	060W	4301353135		Indian	Indian	OW	APD
LC Tribal 14-30D-46	30	040S	060W	4301353136		Indian	Indian	OW	APD
13-4-35 BTR SWD	4	030S	050W	4301353293		Fee	Fee	OW	APD
LC FEE 14-26D-47	26	040S	070W	4301353294		Fee	Indian	OW	APD
LC Fee 5-25D-47	25	040S	070W	4301353295		Fee	Indian	OW	APD
7-35-46 LC SWD	35	040S	060W	4301353296		Fee	Fee	OW	APD
LC Fee 1H-33-47	32	040S	070W	4301353309		Fee	Indian	OW	APD
LC FEE 14-2D-58	2	050S	080W	4301353312		Fee	Indian	OW	APD
LC FEE 13H-21-47	21	040S	070W	4301353313		Fee	Indian	OW	APD
LC Fee 16-21D-47	21	040S	070W	4301353326		Fee	Indian	OW	APD
16-7D-46 BTR	7	040S	060W	4301353328		Fee	Indian	OW	APD
LC Fee 15-26D-47	26	040S	070W	4301353331		Fee	Indian	OW	APD
LC Fee 4-24D-47	23	040S	070W	4301353332		Fee	Indian	OW	APD
LC Fee 5-34D-47	34	040S	070W	4301353333		Fee	Indian	OW	APD
LC Fee 5-35D-47	35	040S	070W	4301353334		Fee	Indian	OW	APD
13-34D-47 LC Fee	34	040S	070W	4301353337		Fee	Indian	OW	APD
14-35D-35 BTR	35	030S	050W	4301352120		Fee	Fee	OW	DRL
6-17D-46 BTR	17	040S	060W	4301351078		Indian	Indian	OW	OPS
5-34D-35 BTR	34	030S	050W	4301351187		Indian	Fee	OW	OPS
5-10D-45 BTR	10	040S	050W	4301351221		Indian	Indian	OW	OPS
5-3D-45 BTR	3	040S	050W	4301351810		Indian	Indian	OW	OPS
9-34D-35 BTR	34	030S	050W	4301352117		Fee	Fee	OW	OPS
5-35D-35 BTR	35	030S	050W	4301352118		Fee	Fee	OW	OPS
1-2D-46 BTR	2	040S	060W	4301353086		Indian	Fee	OW	OPS
7-21-46 DLB	21	040S	060W	4301333567	16526	Indian	Indian	OW	P
LC TRIBAL 1H-27-46	27	040S	060W	4301333568	18175	Indian	Fee	GW	P
7-29-46 DLB	29	040S	060W	4301333584	17603	Indian	Fee	GW	P
LC TRIBAL 12H-28-46	28	040S	060W	4301333631	18132	Indian	Indian	GW	P
LC TRIBAL 13H-21-46	21	040S	060W	4301333632	18107	Indian	Indian	GW	P
12-36-36 BTR	36	030S	060W	4301333638	16336	Indian	Fee	GW	P
5-5-46 BTR	5	040S	060W	4301333639	16542	Indian	Fee	OW	P
5-23-36 BTR	23	030S	060W	4301333642	16675	Indian	Fee	GW	P
14-29-36 BTR	29	030S	060W	4301333643	16725	Indian	Fee	OW	P
14-30-36 BTR	30	030S	060W	4301333644	16701	Indian	Fee	GW	P
7-20-46 DLB	20	040S	060W	4301333657	16584	Indian	Indian	OW	P
LC TRIBAL 5-21D-46	21	040S	060W	4301333658	18887	Indian	Indian	OW	P
5-20-46 DLB	20	040S	060W	4301333659	18750	Indian	Indian	GW	P
LC TRIBAL 13H-20-46	20	040S	060W	4301333678	17979	Indian	Indian	GW	P
14-7-46 BTR	7	040S	060W	4301333806	16890	Indian	Indian	GW	P
7-8-45 BTR	8	040S	050W	4301333820	16974	Indian	Indian	OW	P

From: Bill Barrett Corporation

To: Rig II, LLC

Effective 11/1/2016

1-5-45 BTR	5	040S	050W	4301333868	16931	Indian	Indian	OW	P
5-16-36 BTR	16	030S	060W	4301333970	17195	Indian	Fee	OW	P
5-29-36 BTR	29	030S	060W	4301333972	17557	Indian	Fee	OW	P
4-30-36 BTR	30	030S	060W	4301333973	17249	Indian	Fee	OW	P
7-19-46 DLB	19	040S	060W	4301334004	19018	Indian	Indian	OW	P
5-25-36 BTR	25	030S	060W	4301334021	17126	Fee	Fee	OW	P
5-4-45 BTR	4	040S	050W	4301334089	17507	Indian	Indian	OW	P
13-2-46 BTR	2	040S	060W	4301334090	18618	Indian	Indian	OW	P
2-3-45 BTR	3	040S	050W	4301334099	17932	Indian	Indian	OW	P
7-6-45 BTR	6	040S	050W	4301334100	17653	Indian	Indian	OW	P
1-9-45 BTR	9	040S	050W	4301334101	17910	Indian	Indian	OW	P
8-10-45 BTR	10	040S	050W	4301334102	17530	Indian	Indian	OW	P
7-17-45 BTR	17	040S	050W	4301334104	17933	Indian	Indian	OW	P
16-7-45 BTR	7	040S	050W	4301334111	17665	Indian	Indian	OW	P
15-18-45 BTR	18	040S	050W	4301334112	17832	Indian	Indian	OW	P
6-12-46 BTR	12	040S	060W	4301334114	17964	Indian	Indian	OW	P
5-13-46 BTR	13	040S	060W	4301334115	17833	Indian	Indian	OW	P
16-26-36 BTR	26	030S	060W	4301334132	18028	Indian	Fee	OW	P
1-23-36 BTR	23	030S	060W	4301334136	17722	Indian	Fee	OW	P
15-10-36 BTR	10	030S	060W	4301334277	17419	Indian	Fee	OW	P
14-5-46 BTR	5	040S	060W	4301350307	17624	Fee	Fee	OW	P
14X-22-46 DLB	22	040S	060W	4301350351	17604	Indian	Indian	OW	P
16-13-36 BTR	13	030S	060W	4301350372	17853	Indian	Fee	OW	P
5-33-46 DLB	33	040S	060W	4301350397	17765	Indian	Fee	OW	P
5-34-46 DLB	34	040S	060W	4301350415	17801	Indian	State	GW	P
LC FEE 12H-32-46	32	040S	060W	4301350431	18003	Fee	Fee	OW	P
1-13D-47 BTR	13	040S	070W	4301350445	18205	Indian	Fee	OW	P
16-8D-45 BTR	8	040S	050W	4301350466	18799	Indian	Indian	OW	P
7-13D-46 BTR	13	040S	060W	4301350470	18076	Indian	Indian	OW	P
14-8D-45 BTR	8	040S	050W	4301350567	18207	Indian	Indian	OW	P
14-5D-45 BTR	5	040S	050W	4301350568	18108	Indian	Indian	OW	P
16-31D-36 BTR	31	030S	060W	4301350573	18004	Indian	Fee	OW	P
5-7D-46 BTR	7	040S	060W	4301350574	18176	Indian	Indian	OW	P
LC TRIBAL 13H-33-46	34	040S	060W	4301350575	18223	Indian	State	OW	P
5-8-45 BTR	8	040S	050W	4301350607	18279	Indian	Indian	OW	P
16-6D-45 BTR	6	040S	050W	4301350610	18177	Indian	Indian	OW	P
5-18D-45 BTR	18	040S	050W	4301350611	18300	Indian	Indian	OW	P
7-26-37 BTR	26	030S	070W	4301350641	18131	Indian	Fee	OW	P
3-11D-36 BTR	11	030S	060W	4301350642	18299	Indian	Fee	OW	P
16-1D-46 BTR	1	040S	060W	4301350675	18525	Indian	Indian	OW	P
14-3-45 BTR	3	040S	050W	4301350676	18363	Indian	Indian	OW	P

From: Bill Barrett Corporation

To: Rig II, LLC

Effective 11/1/2016

4-17D-45 BTR	17	040S	050W	4301350687	18517	Indian	Indian	OW	P
5-6D-45 BTR	6	040S	050W	4301350688	18726	Indian	Indian	OW	P
7-7D-45 BTR	7	040S	050W	4301350689	18380	Indian	Indian	OW	P
14-10D-45 BTR	10	040S	050W	4301350754	18447	Indian	Indian	OW	P
14-9D-45 BTR	9	040S	050W	4301350755	18379	Indian	Indian	OW	P
13-16D-36 BTR	16	030S	060W	4301350757	18206	Indian	State	OW	P
5-9D-36 BTR	9	030S	060W	4301350843	18381	Indian	Fee	OW	P
16-5D-46 BTR	5	040S	060W	4301350844	18280	Fee	Fee	OW	P
5-27D-37 BTR	27	030S	070W	4301350847	18526	Indian	Fee	OW	P
7-4D-45 BTR	4	040S	050W	4301350884	18562	Indian	Indian	OW	P
2-16D-45 BTR	16	040S	050W	4301350899	18619	Indian	Indian	OW	P
16-10D-45 BTR	10	040S	050W	4301350902	18725	Indian	Indian	OW	P
5-2D-36 BTR	2	030S	060W	4301350913	18886	Indian	Fee	OW	P
13H-27-36 BTR	27	030S	060W	4301350918	18445	Indian	State	OW	P
8-16D-46 BTR	16	040S	060W	4301350953	19027	Indian	Indian	OW	P
16-16D-46 BTR	16	040S	060W	4301350956	19028	Indian	Indian	OW	P
16-9D-45 BTR	9	040S	050W	4301350962	18662	Indian	Indian	OW	P
14-31D-36 BTR	31	030S	060W	4301350973	18524	Indian	Fee	OW	P
5-10D-36 BTR	10	030S	060W	4301350978	18989	Indian	Fee	OW	P
1-32D-36 BTR	32	030S	060W	4301350979	18648	Indian	Fee	OW	P
16-12D-36 BTR	12	030S	060W	4301350980	18748	Indian	Fee	OW	P
2-18D-45 BTR	18	040S	050W	4301350991	18776	Indian	Indian	OW	P
3-1-46 BTR	1	040S	060W	4301351017	18777	Indian	Fee	OW	P
10-5-45 BTR	5	040S	050W	4301351062	18724	Indian	Indian	OW	P
12-4D-45 BTR	4	040S	050W	4301351063	18813	Indian	Indian	OW	P
1-10D-45 BTR	10	040S	050W	4301351064	18966	Indian	Indian	OW	P
16-2D-46 BTR	2	040S	060W	4301351079	18830	Indian	Indian	OW	P
9H-4-45 BTR	4	040S	050W	4301351092	18814	Indian	Indian	OW	P
12-17-45 BTR	17	040S	050W	4301351097	18984	Indian	Indian	OW	P
5-9D-46 BTR	9	040S	060W	4301351109	19313	Indian	Fee	OW	P
14-9D-36 BTR	9	030S	060W	4301351144	19004	Indian	Fee	OW	P
5-31D-36 BTR	31	030S	060W	4301351146	18691	Indian	Fee	OW	P
4-9D-45 BTR	9	040S	050W	4301351157	18883	Indian	Indian	OW	P
8-12D-46 BTR	12	040S	060W	4301351159	18911	Indian	Indian	OW	P
LC TRIBAL 16-23D-47	23	040S	070W	4301351180	18617	Indian	Indian	OW	P
14-7D-45 BTR	7	040S	050W	4301351222	18949	Indian	Indian	OW	P
5-16D-45 BTR	16	040S	050W	4301351223	18987	Indian	Indian	OW	P
4-5D-45 BTR	5	040S	050W	4301351242	18882	Indian	Indian	OW	P
LC TRIBAL 16H-19-45	19	040S	050W	4301351278	18627	Indian	Indian	OW	P
LC TRIBAL 13-19D-45	19	040S	050W	4301351280	18628	Indian	Indian	OW	P
LC TRIBAL 5-30D-45	30	040S	050W	4301351281	19448	Indian	Indian	OW	P

From: Bill Barrett Corporation

To: Rig II, LLC

Effective 11/1/2016

LC TRIBAL 15-24D-46	24	040S	060W	4301351283	18626	Indian	Indian	OW	P
LC TRIBAL 13H-24-46	19	040S	050W	4301351289	18629	Indian	Indian	OW	P
7-16-47 BTR	16	040S	070W	4301351296	18950	Indian	Fee	OW	P
14-18D-45 BTR	18	040S	050W	4301351313	19005	Indian	Indian	OW	P
LC TRIBAL 16-30D-46	30	040S	060W	4301351320	19006	Indian	Indian	OW	P
LC TRIBAL 5-20D-45	20	040S	050W	4301351331	19449	Indian	Indian	OW	P
11-8D-46 BTR	8	040S	060W	4301351336	19314	Indian	Indian	OW	P
5-7D-45 BTR	7	040S	050W	4301351350	18951	Indian	Indian	OW	P
7-5-35 BTR	5	030S	050W	4301351599	19078	Indian	Fee	OW	P
13-5D-35 BTR	5	030S	050W	4301351600	18996	Indian	Fee	OW	P
11-5D-35 BTR	5	030S	050W	4301351601	19061	Fee	Fee	OW	P
15-5D-35 BTR	5	030S	050W	4301351602	19062	Fee	Fee	OW	P
9-5D-35 BTR	5	030S	050W	4301351609	19029	Indian	Fee	OW	P
3-5D-35 BTR	5	030S	050W	4301351638	19079	Indian	Fee	OW	P
7-8-46 BTR	8	040S	060W	4301351702	19315	Indian	Indian	OW	P
7-30-46 DLB	30	040S	060W	4301351703	18997	Fee	Indian	OW	P
3-13D-46 BTR	13	040S	060W	4301351718	18881	Indian	Indian	OW	P
2-13D-46 BTR	13	040S	060W	4301351719	18885	Indian	Indian	OW	P
12-12D-46 BTR	12	040S	060W	4301351720	18867	Indian	Indian	OW	P
10-12D-46 BTR	12	040S	060W	4301351721	18856	Indian	Indian	OW	P
11-11D-47 BTR	11	040S	070W	4301352091	19633	Fee	Fee	OW	P
7-12D-47 BTR	12	040S	070W	4301352094	19600	Indian	Fee	OW	P
5-12D-47 BTR	12	040S	070W	4301352095	19634	Indian	Fee	OW	P
14-33D-35 BTR	33	030S	050W	4301352162	19450	Indian	Fee	OW	P
16-33D-35 BTR	33	030S	050W	4301352163	19451	Indian	Fee	OW	P
14-22-46 DLB	22	040S	060W	4301333660	17604	Indian	Indian	D	PA
13H-31-36 BTR	31	030S	060W	4301350465	18485	Indian	Fee	OW	PA
16X-23D-36 BTR	23	030S	060W	4301350623	18007	Indian	State	OW	PA
8-6-45 BTR	6	040S	050W	4301350900	18561	Indian	Indian	OW	PA
13-13-36 BTR	13	030S	060W	4301350919	18364	Indian	Fee	OW	PA
7-28-46 DLB	28	040S	060W	4301333569	16460	Indian	Indian	OW	S
5-21-36 BTR	21	030S	060W	4301333641	16674	Indian	Fee	GW	S
13-26-36 BTR	26	030S	060W	4301333980	17569	Indian	Fee	OW	S
14-1-46 BTR	1	040S	060W	4301334113	18516	Indian	Indian	OW	S
16-21-36 BTR	21	030S	060W	4301334130	17721	Indian	Fee	OW	S
14-21-36 BTR	21	030S	060W	4301334131	18006	Indian	Fee	OW	S
7-16-36 BTR	16	030S	060W	4301334133	17834	Indian	Fee	OW	S
1-30-36 BTR	30	030S	060W	4301334134	17905	Indian	Fee	OW	S
16-30-36 BTR	30	030S	060W	4301334135	18005	Indian	Fee	OW	S
3-23-36 BTR	23	030S	060W	4301334137	17860	Indian	Fee	OW	S
16-16-36 BTR	16	030S	060W	4301334138	17666	Indian	Fee	OW	S

From: Bill Barrett Corporation

To: Rig II, LLC

Effective 11/1/2016

4-26-36 BTR	26	030S	060W	4301334139	17620	Fee	Fee	OW	S
9-11-36 BTR	11	030S	060W	4301334276	17451	Indian	Fee	OW	S
3-36-36 BTR	36	030S	060W	4301350398	17955	Indian	Fee	OW	S
7-10-36 BTR	10	030S	060W	4301350437	18052	Indian	Fee	OW	S
16-12D-46 BTR	12	040S	060W	4301350467	18051	Indian	Indian	OW	S
13H-13-46 BTR	13	040S	060W	4301350468	18208	Indian	Indian	OW	S
13-12-46 BTR	12	040S	060W	4301350469	18233	Indian	Indian	OW	S
14-8D-36 BTR	8	030S	060W	4301350612	18163	Indian	Fee	OW	S
14-7D-36 BTR	7	030S	060W	4301350613	18330	Indian	Fee	OW	S
16-9-36 BTR	9	030S	060W	4301350645	18078	Indian	Fee	OW	S
7-27-37 BTR	27	030S	070W	4301350647	18090	Indian	Fee	OW	S
16-12D-37 BTR	12	030S	070W	4301350785	18446	Indian	Fee	OW	S
14-21D-37 BTR	21	030S	070W	4301350859	18548	Indian	Fee	OW	S
10-18D-36 BTR	18	030S	060W	4301350915	18884	Indian	Fee	OW	S
5-27D-36	27	030S	060W	4301350917	18482	Indian	State	OW	S
10-36D-36 BTR	36	030S	060W	4301351005	18523	Indian	Fee	OW	S
14-6D-45 BTR	6	040S	050W	4301351158	18967	Indian	Indian	OW	S
5H-1-46 BTR UTELAND BUTTE	6	040S	050W	4301351215	18728	Indian	Indian	OW	S
5H-1-46 BTR WASATCH	6	040S	050W	4301351216	18727	Indian	Indian	OW	S
1-25D-36 BTR	25	030S	060W	4301351294	18798	Indian	Fee	OW	S
5-5D-35 BTR	5	030S	050W	4301351605	19055	Indian	Fee	OW	S
16-23-36 BTR	23	030S	060W	4301333971	17182	Indian	Fee	OW	TA
LC TRIBAL 14-23D-47	23	040S	070W	4301334022	18616	Indian	Indian	OW	TA
5-32D-36 BTR	32	030S	060W	4301350756	18328	Indian	Fee	OW	TA



October 20, 2016

Re: Bill Barrett Corporation Transfer to New Operator

Dear Ms. Medina:

Attached please find the change of operation Form 9, Form 5's and Request to Transfer APD form changing the operator from Bill Barrett Corporation to RIG II, LLC, effective 11/1/2016. Badlands Energy – Utah, LLC will be a sub-operator.

New Operator Contact information:

RIG II, LLC
1582 West 2600 South
Woods Cross, Utah 84087-0298
Telephone: (801) 683-4245
Fax: (801) 298-9889

Upon reviewing the attached, please contact myself with any questions at 303-312-8115.

Sincerely,

Bill Barrett Corporation

Brady Riley
Permit Analyst

RECEIVED
OCT 21 2016
DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:
(see attached well list)

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

N/A

7. UNIT or CA AGREEMENT NAME:

8. WELL NAME and NUMBER:
(see attached well list)

9. API NUMBER:

10. FIELD AND POOL, OR WILDCAT:

1. TYPE OF WELL

OIL WELL ☒

GAS WELL ☐

OTHER

2. NAME OF OPERATOR:

RIG II, LLC

N4055

3. ADDRESS OF OPERATOR:

1582 West 2600 South

CITY Wood Cross

STATE UT

ZIP 84087

PHONE NUMBER:

(801) 683-4245

4. LOCATION OF WELL

FOOTAGES AT SURFACE: (see attached well list)

COUNTY:

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:

STATE:

UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

☒ NOTICE OF INTENT
(Submit in Duplicate)

Approximate date work will start:

11/1/2016

☐ SUBSEQUENT REPORT
(Submit Original Form Only)

Date of work completion:

☐ ACIDIZE

☐ ALTER CASING

☐ CASING REPAIR

☐ CHANGE TO PREVIOUS PLANS

☐ CHANGE TUBING

☐ CHANGE WELL NAME

☐ CHANGE WELL STATUS

☐ COMINGLE PRODUCING FORMATIONS

☐ CONVERT WELL TYPE

☐ DEEPEN

☐ FRACTURE TREAT

☐ NEW CONSTRUCTION

☒ OPERATOR CHANGE

☐ PLUG AND ABANDON

☐ PLUG BACK

☐ PRODUCTION (START/RESUME)

☐ RECLAMATION OF WELL SITE

☐ RECOMPLETE - DIFFERENT FORMATION

☐ REPERFORATE CURRENT FORMATION

☐ SIDETRACK TO REPAIR WELL

☐ TEMPORARILY ABANDON

☐ TUBING REPAIR

☐ VENT OR FLARE

☐ WATER DISPOSAL

☐ WATER SHUT-OFF

☐ OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

RIG II, LLC IS SUBMITTING THIS SUNDRY AS NOTIFICATION THAT THE WELLS LISTED ON THE ATTACHED LIST HAVE BEEN SOLD TO RIG II, LLC BY BILL BARRETT CORPORATION EFFECTIVE 11/1/2016. PLEASE REFER ALL FUTURE CORRESPONDENCE TO THE ADDRESS BELOW.

RIG II, LLC

1582 West 2600 South

Woods Cross, Utah 84087-0298

801-683-4245

(STATE/FEE BOND # 9219529/ BLM BOND # UTB000712/ BIA BOND # LPM9224670)

BILL BARRETT CORPORATION N4165

Duane Zavala

NAME (PLEASE PRINT)

Duane Zavala

SIGNATURE

Senior Vice President -

EH&S, Government and Regulatory Affairs

RIG II, LLC

Jesse McSwain

NAME (PLEASE PRINT)

Jesse McSwain

SIGNATURE

Manager

NAME (PLEASE PRINT) Jesse McSwain

TITLE Manager

SIGNATURE

Jesse McSwain

DATE

10/20/16

(This space for State use only)

APPROVED

NOV 07 2016

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Request to Transfer Application or Permit to Drill


(This form should accompany a Sundry Notice, Form 9, requesting APD transfer)

Well name:	(See attached list)
API number:	
Location:	Qtr-Qtr: Section: Township: Range:
Company that filed original application:	Bill Barrett Corporation
Date original permit was issued:	
Company that permit was issued to:	Bill Barrett Corporation

Check one	Desired Action:
	Transfer pending (unapproved) Application for Permit to Drill to new operator
	The undersigned as owner with legal rights to drill on the property, hereby verifies that the information as submitted in the pending Application for Permit to Drill, remains valid and does not require revision. The new owner of the application accepts and agrees to the information and procedures as stated in the application.
<input checked="" type="checkbox"/>	Transfer approved Application for Permit to Drill to new operator
	The undersigned as owner with legal rights to drill on the property as permitted, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.	Yes	No
If located on private land, has the ownership changed?	<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> If so, has the surface agreement been updated?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Have there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Have there been any changes to the access route including ownership or right-of-way, which could affect the proposed location?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Has the approved source of water for drilling changed?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Is bonding still in place, which covers this proposed well? Bond No. <small>9219529-LUDGM / UTB000712-BLM / LPM9224670-BIA</small>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Any desired or necessary changes to either a pending or approved Application for Permit to Drill that is being transferred, should be filed on a Sundry Notice, Form 9, or amended Application for Permit to Drill, Form 3, as appropriate, with necessary supporting information as required.

Name (please print) Jesse McSwain Title Manager
Signature  Date 10/20/16
Representing (company name) RIG II, LLC

The person signing this form must have legal authority to represent the company or individual(s) to be listed as the new operator on the Application for Permit to Drill.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING


UIC FORM 5

TRANSFER OF AUTHORITY TO INJECT


Well Name and Number 6-32-36 BTR SWD	API Number 4301350921
Location of Well Footage : 1628 FNL 1553 FWL County : DUCHENSE QQ, Section, Township, Range: SENW 32 3S 6W State : UTAH	Field or Unit Name CEDAR RIM Lease Designation and Number 2OG0005608

EFFECTIVE DATE OF TRANSFER: 11/1/2016


CURRENT OPERATOR

Company: <u>BILL BARRETT CORPORATION</u>	Name: <u>Duane Zavadii</u>
Address: <u>1099 18th Street Ste 2300</u>	Signature: <u></u>
city <u>DENVER</u> state <u>CO</u> zip <u>80202</u>	Title: <u>Senior Vice President -</u>
Phone: <u>(303) 293-9100</u>	Title: <u>EH&S, Government and Regulatory Affairs</u>
Comments:	Date: <u>10/20/16</u>

NEW OPERATOR

Company: <u>RIG II, LLC</u>	Name: <u>Jesse McSwain</u>
Address: <u>1582 West 2600 South</u>	Signature: <u></u>
city <u>Wood Cross</u> state <u>UT</u> zip <u>84087</u>	Title: <u>Manager</u>
Phone: <u>(801) 683-4245</u>	Date: <u>10/20/16</u>
Comments:	

(This space for State use only)

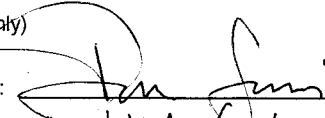Transfer approved by: 
Title: UIC Geologist

Approval Date: 11/3/16

Comments:

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

UIC FORM 5


TRANSFER OF AUTHORITY TO INJECT

Well Name and Number 16-6D-46 BTR SWD	API Number 4301350781
Location of Well Footage : 0200 FSL 0099 FEL County : DUCHESNE QQ, Section, Township, Range: SESE 6 4S 6W State : UTAH	Field or Unit Name ALTAMONT Lease Designation and Number 2OG0005608

EFFECTIVE DATE OF TRANSFER: 11/1/2016


CURRENT OPERATOR

Company: BILL BARRETT CORPORATION
Address: 1099 18th Street Ste 2300
city DENVER state CO zip 80202
Phone: (303) 293-9100
Comments:


Name: Duane Zavadii
Signature: 
Senior Vice President -
Title: EH&S, Government and Regulatory Affairs
Date: 10/20/16

NEW OPERATOR

Company: RIG II, LLC
Address: 1582 West 2600 South
city Wood Cross state UT zip 84087
Phone: (801) 683-4245
Comments:

Name: Jesse McSwain
Signature: 
Title: Manager
Date: 10/20/16

(This space for State use only)

Transfer approved by: 
Title: VIC

Approval Date: 11/3/16

Comments:

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING


UIC FORM 5

TRANSFER OF AUTHORITY TO INJECT


Well Name and Number SWD 9-36 BTR	API Number 4301350646
Location of Well Footage : 0539 FSL 0704 FEL County : DUCHESNE QQ, Section, Township, Range: SESE 9 3S 6W State : UTAH	Field or Unit Name CEDAR RIM Lease Designation and Number 2OG0005608

EFFECTIVE DATE OF TRANSFER: 11/1/2016

CURRENT OPERATOR

Company: <u>BILL BARRETT CORPORATION</u>	Name: <u>Duane Zavadi</u>
Address: <u>1099 18th Street Ste 2300</u>	Signature: <u></u>
city <u>DENVER</u> state <u>CO</u> zip <u>80202</u>	Title: <u>Senior Vice President - EH&S, Government and Regulatory Affairs</u>
Phone: <u>(303) 293-9100</u>	Date: <u>10/20/16</u>
Comments:	

NEW OPERATOR

Company: <u>RIG II, LLC</u>	Name: <u>Jesse McSwain</u>
Address: <u>1582 West 2600 South</u>	Signature: <u></u>
city <u>Wood Cross</u> state <u>UT</u> zip <u>84087</u>	Title: <u>Manager</u>
Phone: <u>(801) 683-4245</u>	Date: <u>10/20/16</u>
Comments:	

(This space for State use only)

Transfer approved by: _____ Approval Date: _____

Title: _____

Comments:

*This well was approved by USEPA.
EPA approval will be required.*