

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL						1. WELL NAME and NUMBER Ute Tribal 3-1-4-2E				
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>						3. FIELD OR WILDCAT UNDESIGNATED				
4. TYPE OF WELL Oil Well <input type="checkbox"/> Coalbed Methane Well: NO <input type="checkbox"/>						5. UNIT or COMMUNITIZATION AGREEMENT NAME				
6. NAME OF OPERATOR CRESCENT POINT ENERGY U.S. CORP						7. OPERATOR PHONE 720 880-3621				
8. ADDRESS OF OPERATOR 555 17th Street, Suite 750, Denver, CO, 80202						9. OPERATOR E-MAIL abaldwin@crecidentpointenergy.com				
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) 14-20-H62-6288			11. MINERAL OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input checked="" type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>			12. SURFACE OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input checked="" type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>				
13. NAME OF SURFACE OWNER (if box 12 = 'fee')						14. SURFACE OWNER PHONE (if box 12 = 'fee')				
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')						16. SURFACE OWNER E-MAIL (if box 12 = 'fee')				
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN') Ute Tribe			18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>			19. SLANT VERTICAL <input checked="" type="checkbox"/> DIRECTIONAL <input type="checkbox"/> HORIZONTAL <input type="checkbox"/>				
20. LOCATION OF WELL		FOOTAGES		QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN		
LOCATION AT SURFACE		705 FNL 1809 FWL		NENW	1	4.0 S	2.0 E	U		
Top of Uppermost Producing Zone		705 FNL 1809 FWL		NENW	1	4.0 S	2.0 E	U		
At Total Depth		705 FNL 1809 FWL		NENW	1	4.0 S	2.0 E	U		
21. COUNTY UINTAH			22. DISTANCE TO NEAREST LEASE LINE (Feet) 705			23. NUMBER OF ACRES IN DRILLING UNIT 40				
			25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 920			26. PROPOSED DEPTH MD: 7925 TVD: 7925				
27. ELEVATION - GROUND LEVEL 4800			28. BOND NUMBER LPM9080276			29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 47-1817				
Hole, Casing, and Cement Information										
String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement	Sacks	Yield	Weight
Cond	24	16	0 - 40	65.0	H-40 ST&C	8.3	No Used	0	0.0	0.0
Surf	12.25	8.625	0 - 1000	24.0	J-55 ST&C	8.3	Class G	641	1.15	15.8
Prod	7.875	5.5	0 - 7925	17.0	N-80 LT&C	10.0	Light (Hibond)	217	4.31	10.5
							Class G	504	1.65	13.1
ATTACHMENTS										
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES										
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER					<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN					
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)					<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER					
<input type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)					<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP					
NAME Emily Kate DeGrasse			TITLE Regulatory & Government Affairs Analyst			PHONE 720 880-3644				
SIGNATURE			DATE 09/12/2014			EMAIL edegrasse@crecidentpointenergy.com				
API NUMBER ASSIGNED 43047547470000			APPROVAL <div style="text-align: center;">  Permit Manager </div>							

Crescent Point Energy U.S. Corp
Ute Tribal 3-1-4-2E
 NE/NW of Section 1, T4S, R2E, USB&M
 SHL & BHL: 705' FNL & 1809' FWL
 Uintah County, Utah

DRILLING PLAN

1-2. Geologic Surface Formation and Estimated Tops of Important Geologic Markers

Formation	Depth – TVD/MD
Uinta	Surface
Upper Green River Marker	3778'
Mahogany	4270'
Garden Gulch (TGR3)	5337'
Douglas Creek	6099'
Black Shale	6443'
Castle Peak	6699'
Uteland	6965'
Wasatch	7125'
TD	7925'

3. Estimated Depths of Anticipated Water, Oil, Gas Or Minerals

Green River Formation (Oil) 3,778' – 7,125'
 Wasatch Formation (Oil) 7,125' – 7,925'

Fresh water may be encountered in the Uinta Formation, but would not be expected below 350'. All usable (>10,000 PPM TDS) water and prospectively valuable minerals (as described at onsite) encountered during drilling will be recorded by depth and adequately protected.

All water shows and water bearing geologic units will be reported to the geologic and engineering staff at the Vernal BLM prior to running the next string of casing or before plugging orders are requested. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required. All water shows must be reported within one (1) business day after being encountered. Detected water flows shall be sampled, analyzed, and reported to the geologic and engineering staff at the BLM. The Vernal BLM may request additional water samples for further analysis.

The following information is requested for water shows and samples where applicable:

Location & Sample Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO ₃) (mg/l)
Dissolved Bicarbonate (NaHCO ₃) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO ₄) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. Proposed Casing & Cementing Program*Casing Design:*

Size	Interval		Weight	Grade	Coupling	Design Factors			
	Top	Bottom				Burst	Collapse	Tension	
Conductor 16" Hole Size 24"	0'	40'	65	H-40	STC	1,640	670	439	API
Surface casing 8-5/8" Hole Size 12-1/4"	0'	1000'	24	J-55	STC	2,950 405 7.27	1,370 696 1.97	244,000 24,000 10.17	API Load SF
Prod casing 5-1/2" Hole Size 7- 7/8"	0'	7,925'	17	E-80	LTC	7,740 6,200 1.25	6,290 3,700 1.70	348,000 124,000 2.80	API Load SF

Assumptions:

1. Surface casing max anticipated surface pressure (MASP) = Frac gradient – gas gradient
2. Production casing MASP (production mode) = Pore pressure – gas gradient
3. All collapse calculations assume fully evacuated casing w/gas gradient
4. All tension calculations assume air weight

Frac gradient at surface casing shoe = 10.0 ppg
Pore pressure at surface casing shoe = 8.33 ppg
Pore pressure at prod casing shoe = 8.33 ppg
Gas gradient = 0.115 psi/ft

Minimum Safety Factors:

Burst = 1.000
Collapse = 1.125
Tension = 1.800

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of one (1) centralizer per joint on the bottom three joints.

Cementing Design:

Job	Fill	Description	Excess	Sacks	Weight (ppg)	Yield (ft ³ /sk)
Surface casing	1000' - surface	Class V 2% chlorides	75%	641	15.8	1.15
Prod casing Lead	3778' to Surface	Hifill Class V 3% chlorides	25% in open-hole, 0% in cased hole	217	10.5	4.31
Prod casing Tail	TD to 3778'	Class G 10% chlorides	15%	504	13.1	1.65

*Actual volume pumped will have excess over gauge hole or caliper log if available

- Compressive strength of tail cement: 500 psi @ 7 hours

Waiting On Cement: A minimum of four (4) hours shall elapse prior to attempting any pressure testing of the BOP equipment which would subject the surface casing cement to pressure, and a minimum of six (6) hours shall elapse before drilling out of the wiper plug, cement, or shoe. WOC time shall be recorded in the Driller's Log. Compressive strength shall be a minimum of 500 psi prior to drilling out.

The Vernal BLM shall be notified, with sufficient lead time, in order to have a BLM representative on location while running all casing strings and cementing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

The production casing cementing program shall be conducted as approved to protect and/or isolate all usable water zones, potentially productive zones, lost circulation zones, abnormally pressured zones, and any prospectively valuable deposits of minerals.

As a minimum, usable water zones shall be isolated and/or protected by having a cement top for the production casing at least 200 feet above the base of the usable water. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

Top plugs shall be used to reduce contamination of cement by displacement fluid. A Tuned spacer will be used to prevent contamination of the lead cement by the drilling mud.

All casing strings below the conductor shall be pressure tested to 0.22 psi per foot of casing string length or to 1500 psi, whichever is greater, but not to exceed 70% of the minimum internal yield. If pressure declines more than 10% in 30 minutes, corrective action shall be taken.

A Form 3160-5, "Sundry Notices and Reports on Wells" shall be filed with the BLM within 30 days after the work is completed. This report must include the following information:

Setting of each string of casing showing the size, grade, weight of casing set, depth, amounts and type of cement used, whether cement circulated of the top of the cement behind the casing, depth of the cementing tools used, casing method and results, and the date of the work done. Spud date will be shown on the first reports submitted.

5. Drilling Fluids Program

The Conductor section (from 0' to 40') will be drilled by Auger and final depth determined by when the black shale is encountered with a minimum depth of 40'.

The surface interval will then be drilled to $\pm 1000'$ with air/mist system. The air rig is equipped with a 6 ½" blooie line that is straight run to the reserve pit. A variance is in request for this operation. The request can be found in Section 12 of this plan.

From $\pm 1000'$ to TD, a brine water system will be utilized. Clay inhibition and hole stability will be achieved with a polymer (DAP) additive; the reserve pit will be lined to address this additive. This brine water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 9.5 lbs/gal. If it is necessary to control formation fluids or pressure, the system will be weighted with the addition of brine, and if pressure conditions warrant, barite and/or calcium carbonate will be used as a weighting agent. There will be enough weighting agent on location to increase the entire system to 11.0 ppg MW.

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior approval to ensure adequate protection of fresh water aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating characteristics of a hazardous waste will not be used in drilling, testing, or completion operations.

Crescent Point Energy will visually monitor pit levels and flow from the well during drilling operations.

6. Minimum Specifications for Pressure Control

A 3,000 psi BOP system or better will be used on this well. All equipment will be installed and tested per Onshore Order No. 2.

The configuration is as follows:

- Float in drillstring
- Inside BOP or safety valve
- Safety valve with same pipe threading
- Rotating Head below rotary table
- Fillup line
- 11" Annular Preventer – rated to 3,000 psi minimum
- 11" bore, 4-1/2" pipe ram – rated to 3,000 psi minimum
- 11" bore, Blind Ram – rated to 3,000 psi minimum
- 11" bore Drilling Spool with 2 side outlets (Choke side at 3" minimum & Kill side at 2" minimum)
 - 2 Kill line valves at 2" minimum – one with a check valve
 - Kill line at 2" minimum
 - 2 Choke line valves at 3" minimum
 - Choke line at 3" minimum
 - 2 adjustable chokes on manifold
 - Pressure gauge on choke manifold

7. BOPE Test Criteria

A Function Test of the Ram BOP equipment shall be made every trip and annular preventer every week. All required BOP tests and/or drills shall be recorded in the Driller's Report.

Chart recorders will be used for all pressure tests. Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to BLM representatives upon request.

At a minimum, the Annular preventer will be tested to 50% of its rating for ten minutes. All other equipment (Rams, valves, manifold) will be tested at 3,000 psi for 10 minutes with a test plug. If rams are to be changed for any reason post drillout, the rams will be tested to 70% of surface casing internal yield.

At a minimum, the above pressure tests will be performed when such conditions exist:

- BOP's are initially installed
- Whenever a seal subject to pressure test is broken
- Following repairs to the BOPs
- Every 30 days

8. Accumulator

The Accumulator will have sufficient capacity to open the hydraulically-controlled choke line valve (HCR), close both rams and annular preventer as well maintain 200 psi above nitrogen precharge of the accumulator without use of accumulator pumps. The fluid reservoir volume will be double the usable volume of the accumulator system. The fluid level will be maintained per manufacturer's specifications.

The BOP system will have two independent power sources to close both rams and annular preventer, while opening HCR. Nitrogen bottles will be one source and electric and/or air powered pumps will be the other.

The accumulator precharge will be conducted every 6 months and maintained to be within the specifications of Onshore Order No. 2

A manual locking device or automatic locking device will be installed on both ram preventers and annular preventer.

Remote controls will be readily accessible to the driller and be capable of closing all preventers. Main controls will be available to allow full functioning of all preventers and HCR.

9. Testing, Logging and Coring Programs

The logging program will consist of a Gamma Ray log from TD to base of surface casing @ +/- 1100'. A cement bond log will be run from PBTD to top of cement. No drill stem testing or coring is planned for this well.

10. Anticipated Abnormal Pressures or Temperature

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous wells drilled to similar depths in this area.

Maximum anticipated bottomhole pressure will be approximately equal to total depth in feet multiplied by a 0.52 psi/ft gradient, and a maximum anticipated surface pressure will be approximately equal to the bottomhole pressure calculated minus the pressure of a partially evacuated hole calculated at a 0.22 psi/foot gradient.


11. Anticipated Starting Date and Duration of Operations

It is anticipated that drilling operations will commence as soon as possible following permit approval and will take approximately ten (10) days from spud to rig release and two weeks for completions.

12. Variations Requested from Onshore Order No. 2

1. A diverter is utilized for surface air drilling, rather than a lubricated rotating head.
2. The blooie line is 45 ft from the wellbore rather than 100 ft and is not anchored down.
3. The blooie line is not equipped with an automatic igniter or continuous pilot light.
4. The compressor is located on the rig itself and not 100 ft from the wellbore.
5. The requirement for an Formation Integrity Test (FIT) or a Leak Off Test (LOT)

R. 2 E.

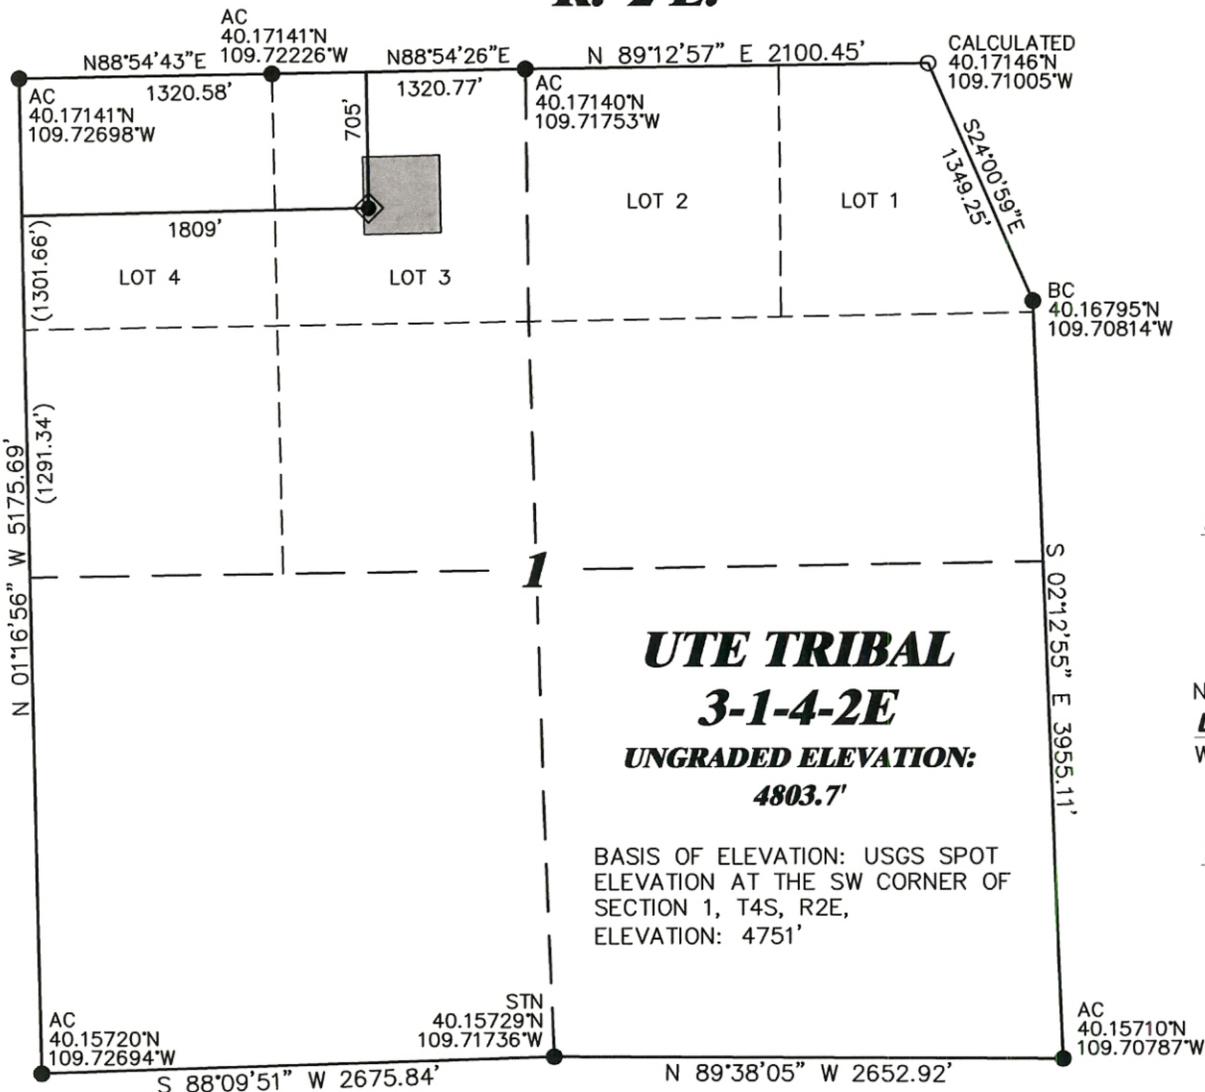

SCALE 1" = 1000'
GRID NORTH

T. 4 S.

DRAWING DATUM

SPCS UTC (NAD27)

SHL

NORTHING (NAD27)

673771.08

EASTING (NAD27)

2497437.04

LATITUDE (NAD83)

NORTH 40.169558 DEG.

LONGITUDE (NAD83)

WEST 109.720537 DEG.

UTM


(ZONE 12, METERS)

NORTHING (NAD83)

4447361.54

EASTING (NAD83)

608945.46




SURVEYOR'S STATEMENT

I, DAVID E. HENDERHAN, OF GRAND JUNCTION, COLORADO, HEREBY STATE: THIS MAP WAS MADE FROM NOTES TAKEN DURING AN ACTUAL FIELD SURVEY DONE UNDER MY DIRECT SUPERVISION ON THE 22nd DAY OF MAY, 2014 AND THAT THIS PLAT CORRECTLY SHOWS THE LOCATION OF UTE TRIBAL 3-1-4-2E AS STAKED ON THE GROUND.

LEGEND

- ◆ WELL LOCATION
- CALCULATED CORNER
- FOUND MONUMENT (LAT/LONG VALUES ARE NAD83)

400'x400' DRILLING WINDOW

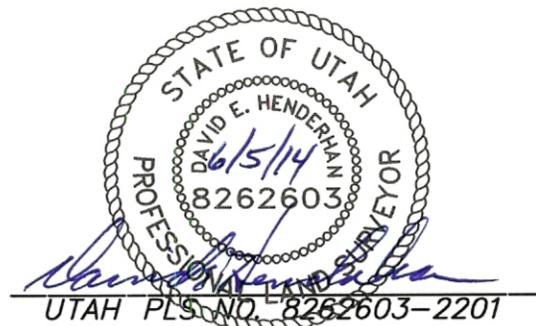


DRG RIFFIN & ASSOCIATES, INC.
(307) 362-5028 1414 ELK ST., ROCK SPRINGS, WY 82901

**PLAT OF DRILLING LOCATION IN
LOT 3, SECTION 1, FOR
CRESCENT POINT ENERGY**

DRAWN: 10/24/13 - TMH	SCALE: 1" = 1000'
REVISED: 5/28/2014 - TCM	DRG JOB No. 20041
MOVED PAD	EXHIBIT 1

**705' F/NL, & 1809' F/WL, SECTION 1,
T. 4 S., R. 2 E., U.S.M.,
UINTAH COUNTY, UTAH**

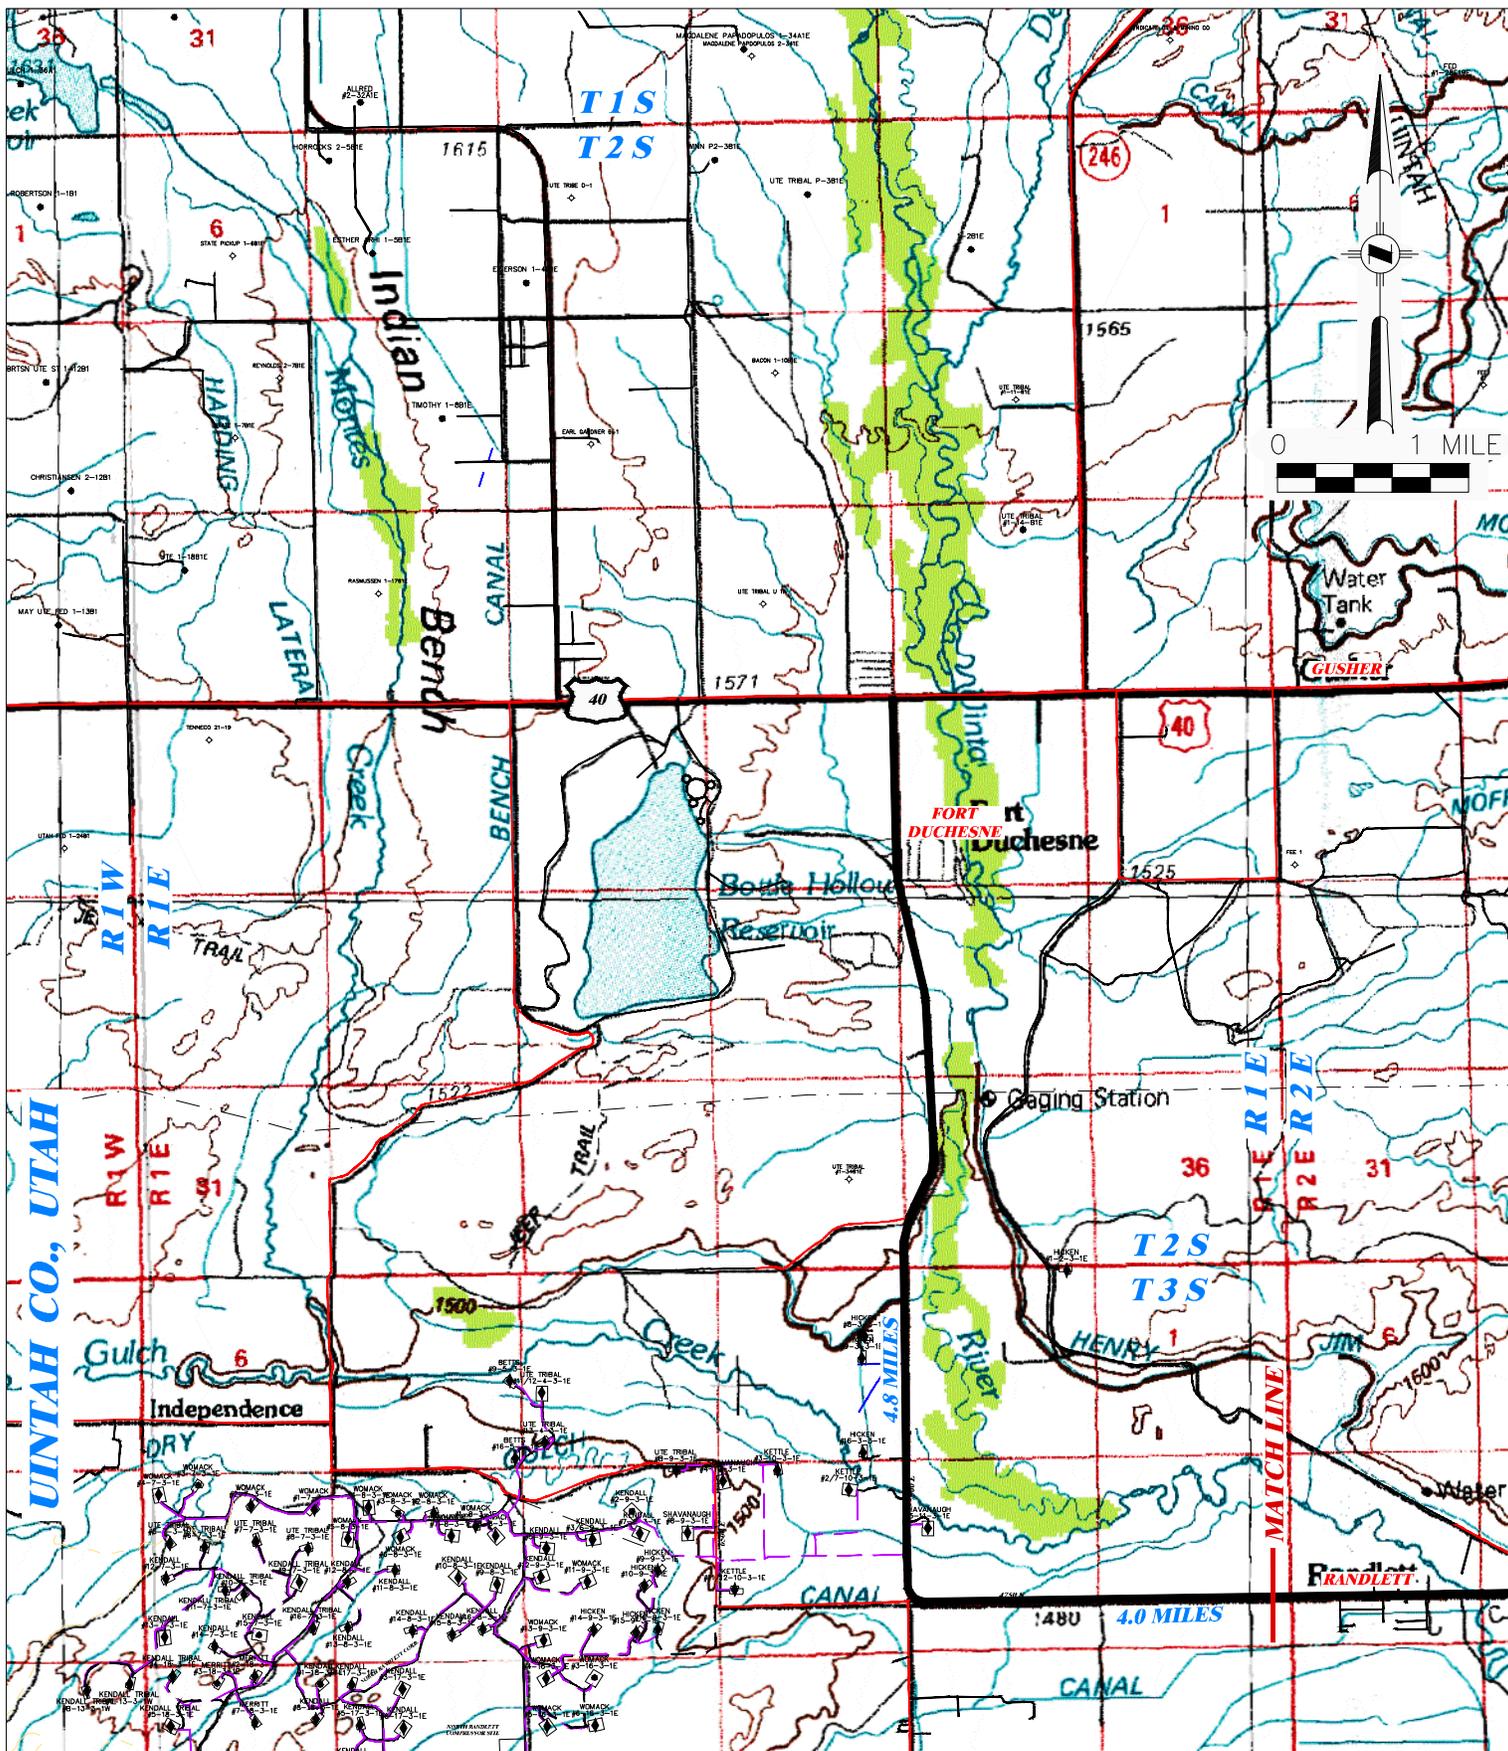


DRG RIFFIN & ASSOCIATES, INC.
 (307) 362-5028 1414 ELK ST., ROCK SPRINGS, WY 82901

**PROPOSED ACCESS FOR
 CRESCENT POINT ENERGY
 UTE TRIBAL 3-1-4-2E
 SECTION 1, T. 4 S., R. 2 E.**

DRAWN: 10/24/13 - TMH	SCALE: 1" = 1 MILE
REVISED: 5/28/2014 - TCM	DRG JOB No. 20041
MOVED PAD	TOPO A - 1 OF 2

PROPOSED ROAD ———— EXISTING ROAD ————

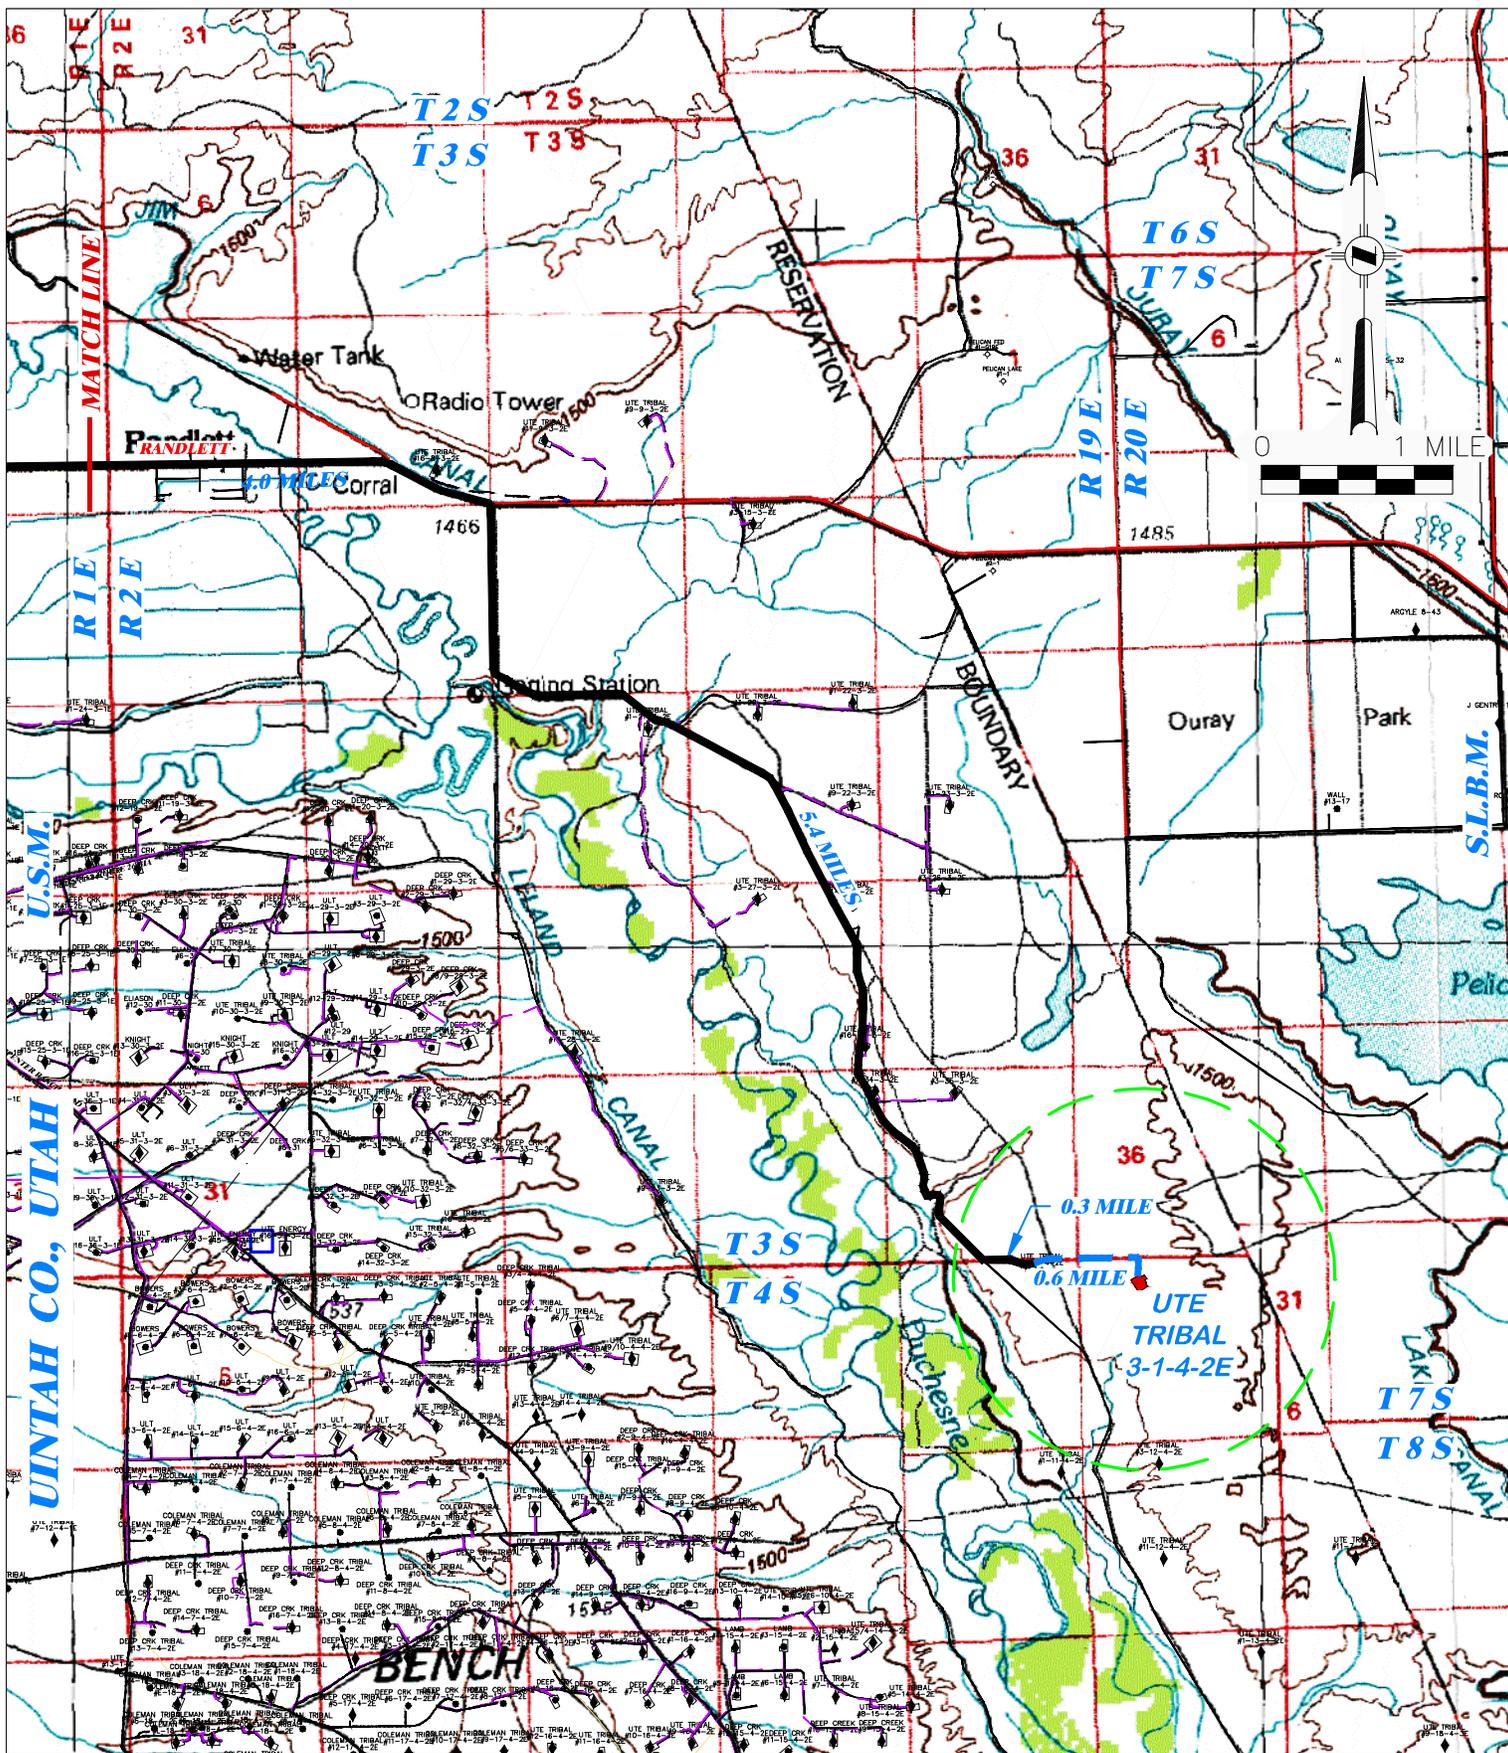


DRG RIFFIN & ASSOCIATES, INC.
 (307) 362-5028 1414 ELK ST., ROCK SPRINGS, WY 82901


**PROPOSED ACCESS FOR
 CRESCENT POINT ENERGY
 UTE TRIBAL 3-1-4-2E
 SECTION 1, T.4 S., R.2 E.**

DRAWN: 10/24/13 - TMH	SCALE: 1" = 1 MILE
REVISED: 5/28/2014 - TCM	DRG JOB No. 20041
MOVED PAD	TOPO A - 2 OF 2

PROPOSED ROAD ——— EXISTING ROAD ———

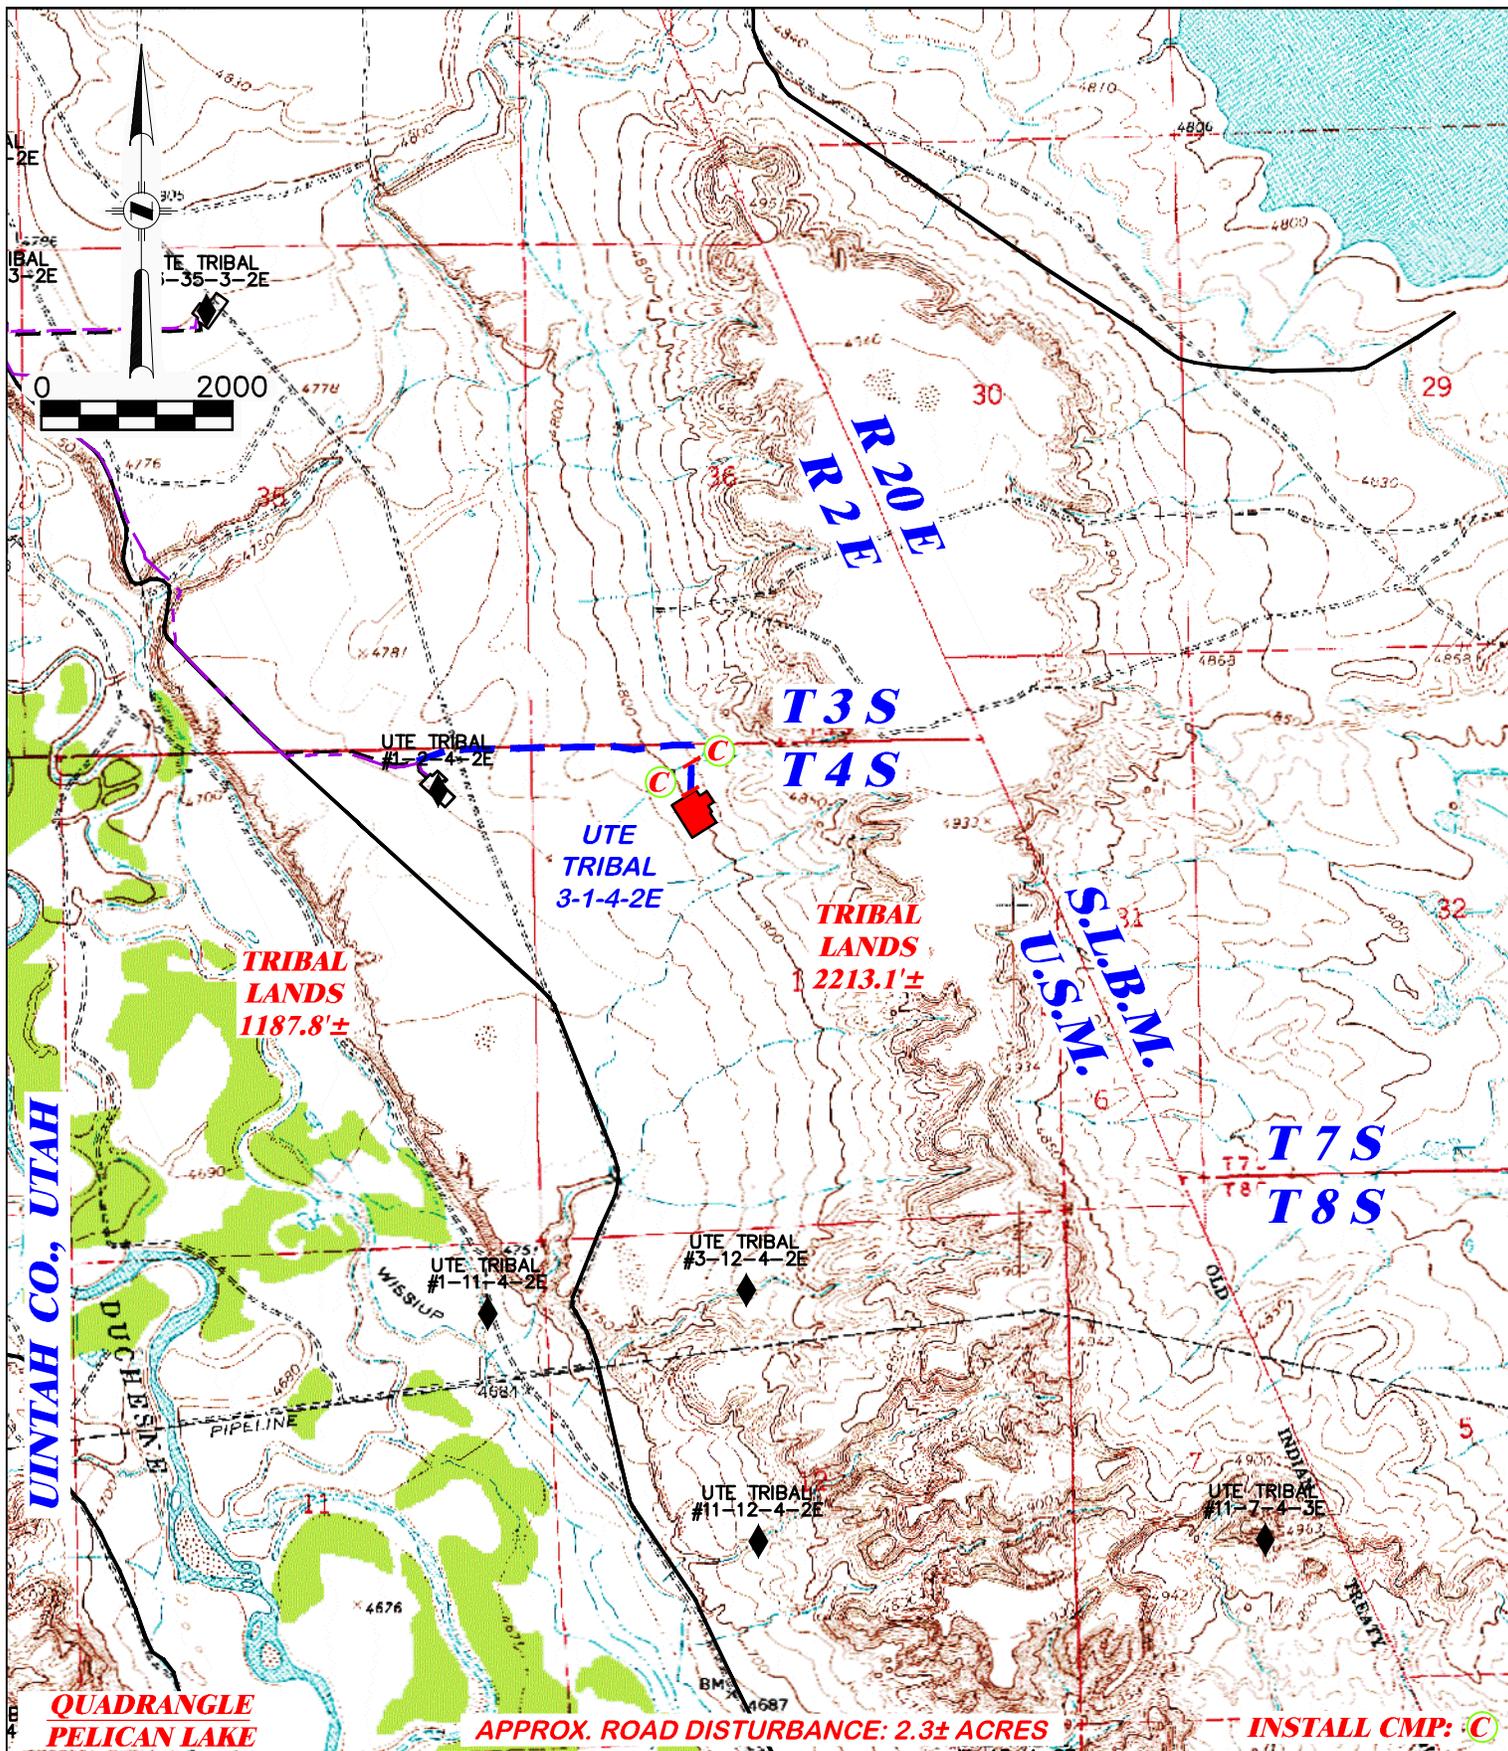

 DRG RIFFIN & ASSOCIATES, INC. (307) 362-5028 1414 ELK ST., ROCK SPRINGS, WY 82901		PROPOSED ROAD FOR CRESCENT POINT ENERGY UTE TRIBAL 3-1-4-2E SECTION 1, T. 4 S., R. 2 E.	
DRAWN: 10/24/13 - TMH REVISED: 5/28/2014 - TCM MOVED PAD	SCALE: 1" = 2000' DRG JOB No. 20041 TOPO B	TOTAL PROPOSED LENGTH: 3400.9± PROPOSED ROAD — — — — EXISTING ROAD — — — —	

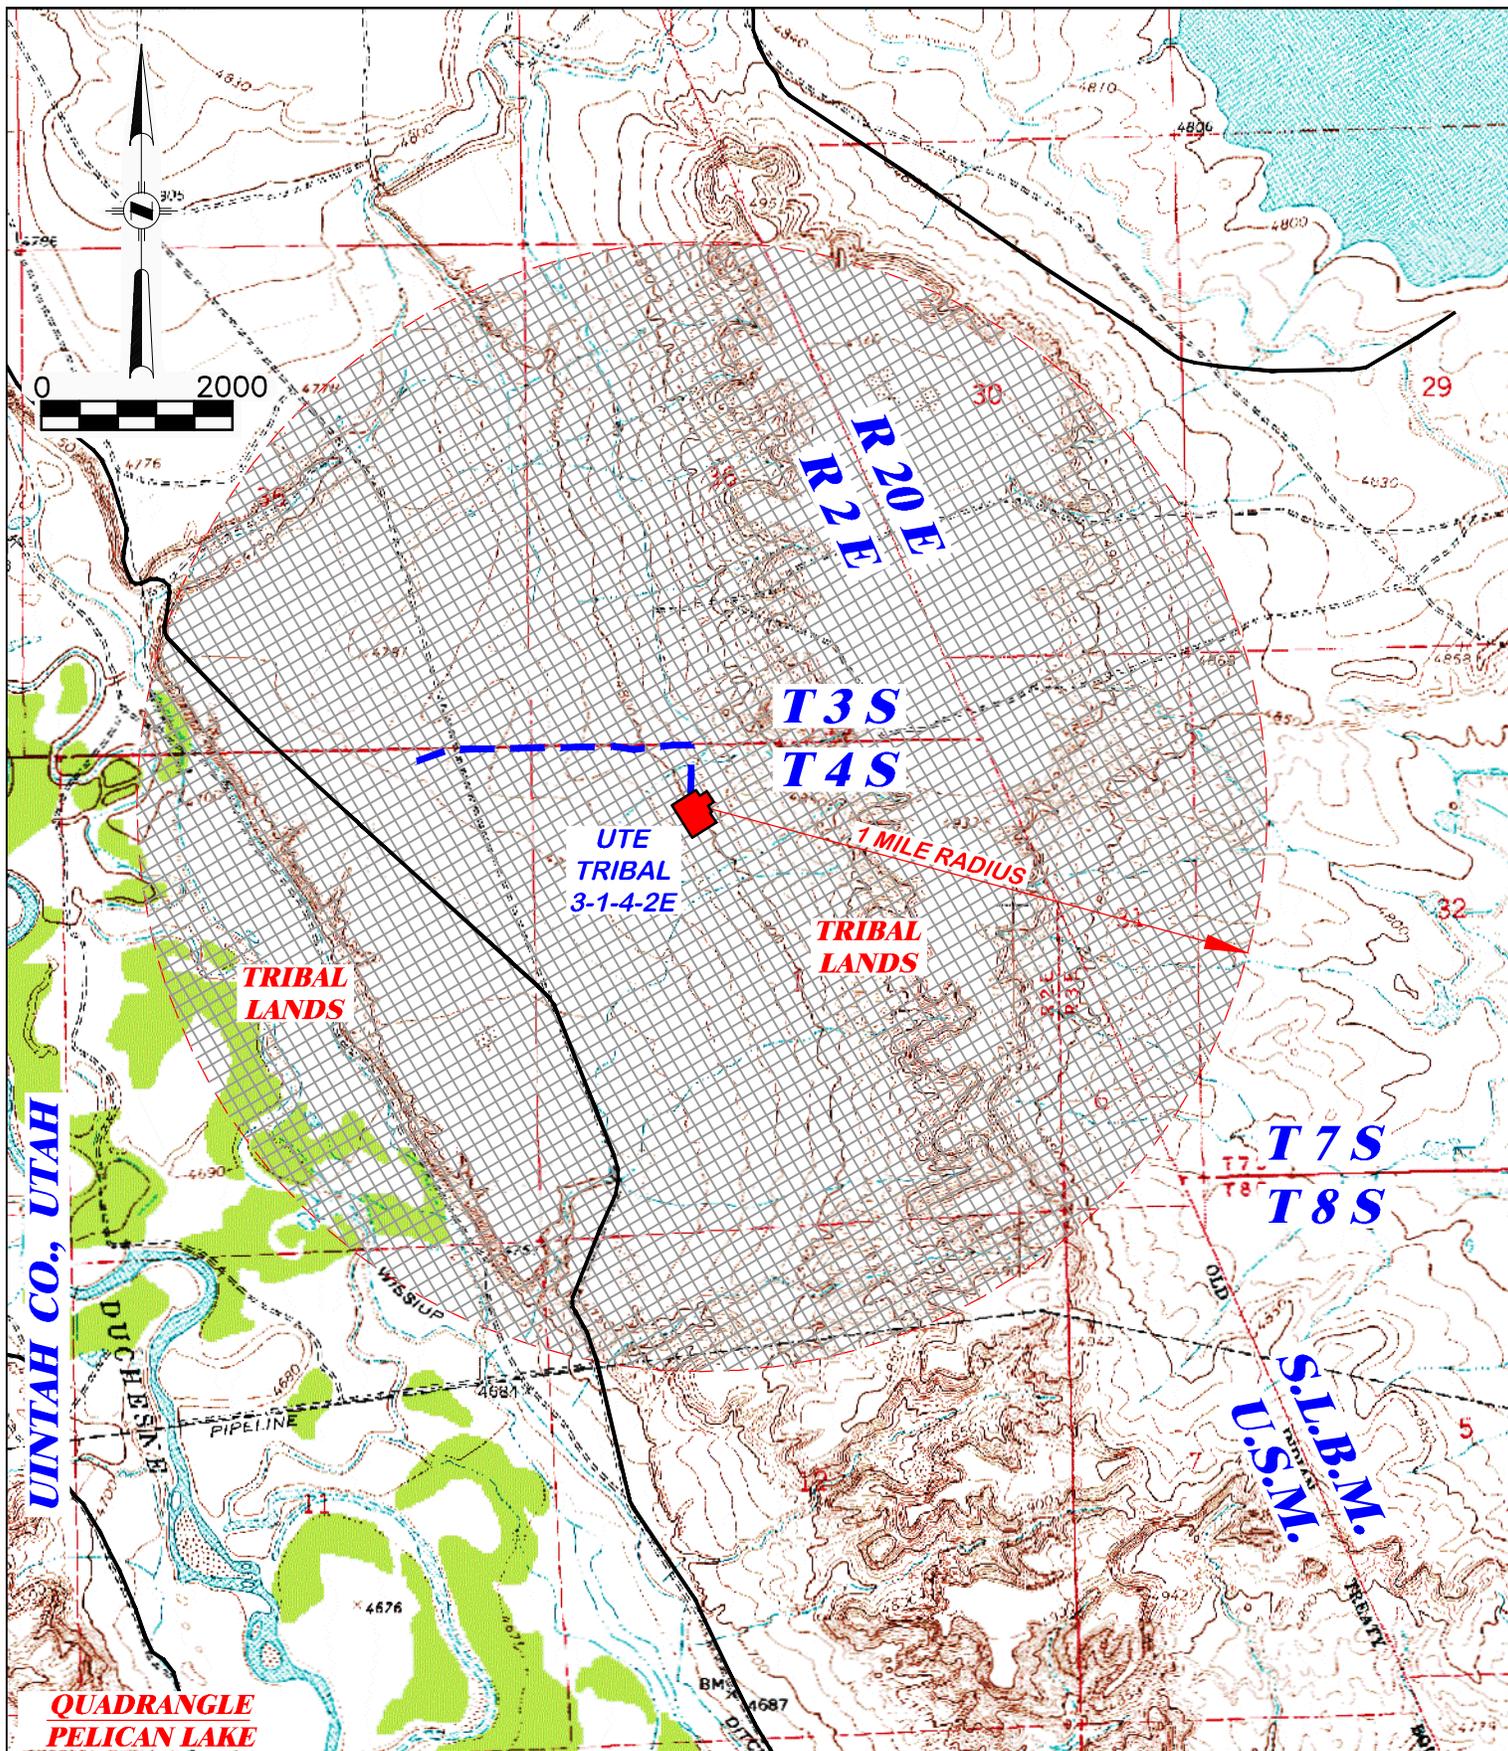


DRG RIFFIN & ASSOCIATES, INC.
 (307) 362-5028 1414 ELK ST., ROCK SPRINGS, WY 82901

DRAWN: 10/24/13 - TMH	SCALE: 1" = 2000'
REVISED: 5/28/2014 - TCM	DRG JOB No. 20041
MOVED PAD	TOPO C

**ONE MILE RADIUS FOR
 CRESCENT POINT ENERGY
 UTE TRIBAL 3-1-4-2E
 SECTION 1, T. 4 S., R. 2 E.**

PROPOSED ROAD — — — — — EXISTING ROAD —————

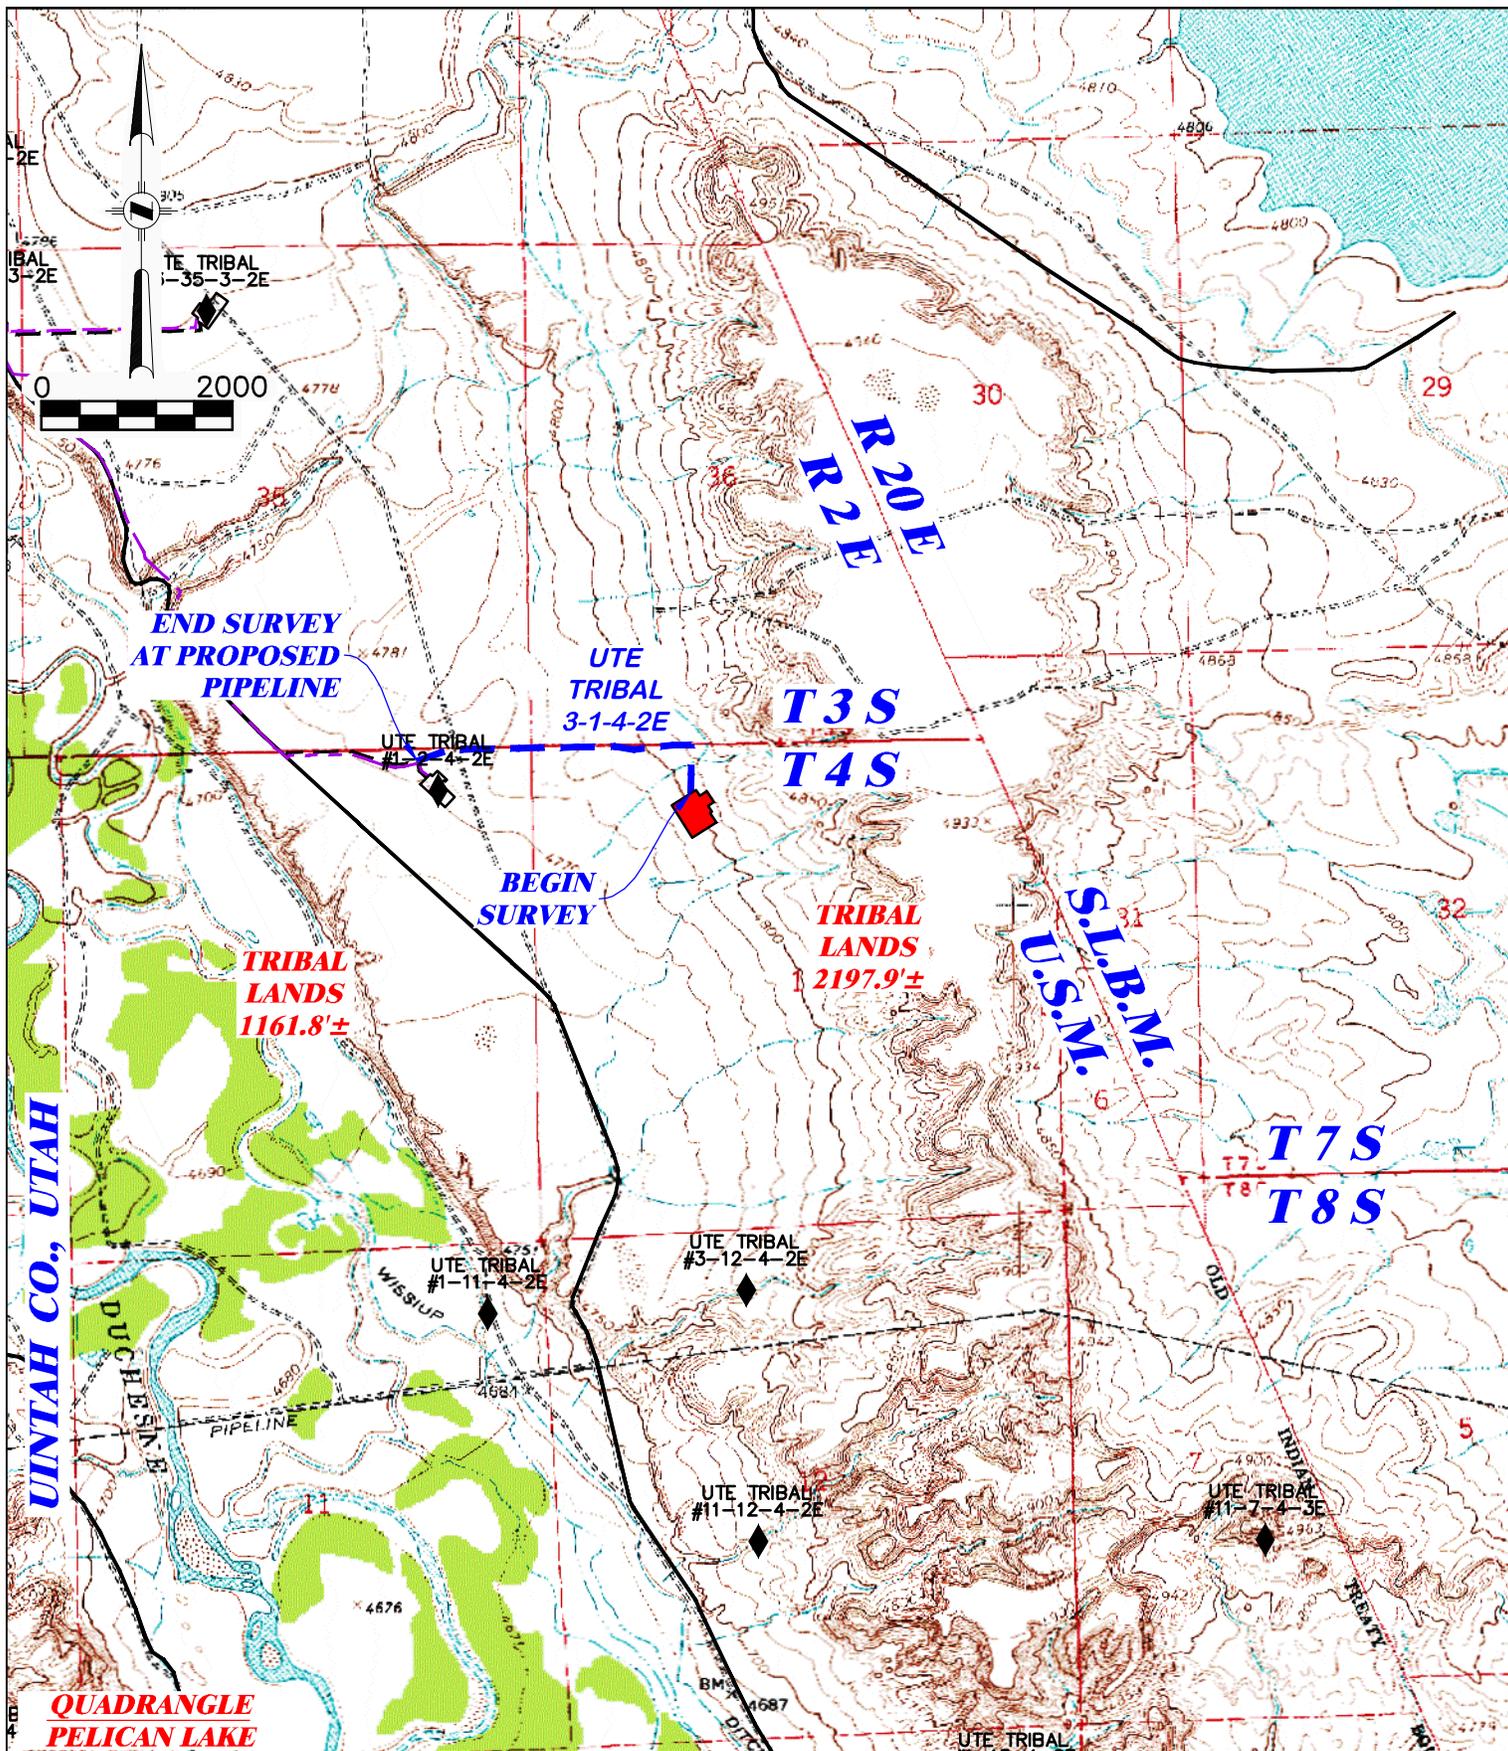

 DRG RIFFIN & ASSOCIATES, INC. (307) 362-5028 1414 ELK ST., ROCK SPRINGS, WY 82901		PROPOSED PIPELINE FOR CRESCENT POINT ENERGY UTE TRIBAL 3-1-4-2E SECTION 1, T. 4 S., R. 2 E.	
DRAWN: 10/24/13 - TMH REVISED: 5/28/2014 - TCM MOVED PAD	SCALE: 1" = 2000' DRG JOB No. 20041 TOPO D	TOTAL PROPOSED LENGTH: 3359.7'±	
		PROPOSED PIPELINE — — — —	EXISTING ROAD —————




519 E. 300 S.
Vernal, UT 84078
P435-781-0434
F435-789-5656


Oct, 18, 2013



**9.5" TIME SAVER WELLHEAD SYSTEM
WITH DRILL SPOOL,
AND BOP CONFIGURATION**

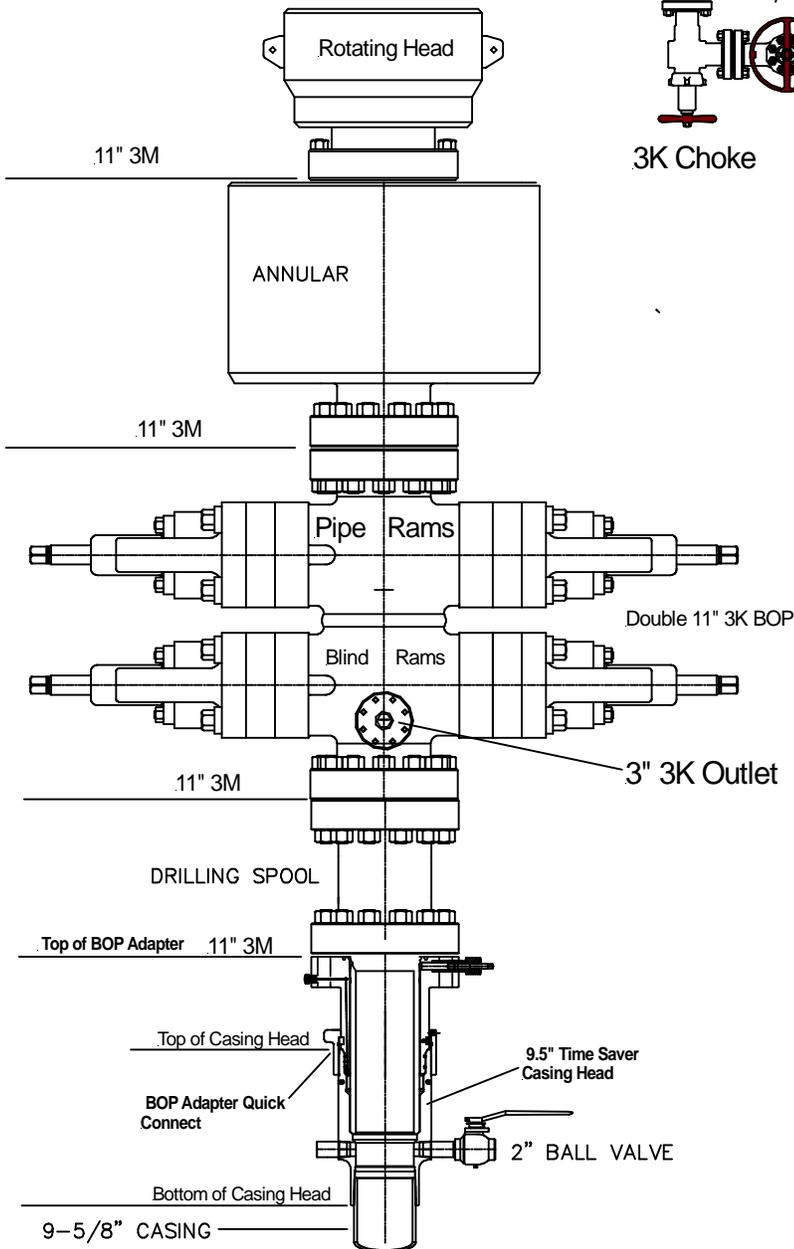


Choke Manifold

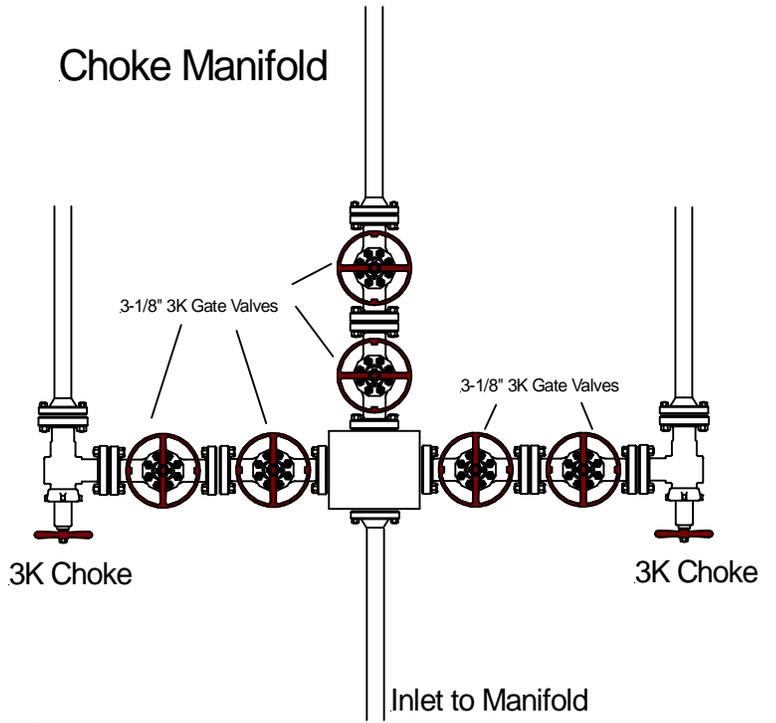

NOTES:

- TOPSOIL TO BE STRIPPED FROM ALL CONSTRUCTION AREAS AND EXCESS MATERIAL PILE LOCATION.
- STOCK PILE ARE CALCULATED AS HAVING A VOLUME OF 7,287 CUBIC YARDS (10% SWELL FACTOR) WITH 2:1 END SLOPES AND 1.5:1 SIDE SLOPES.
- THE INFORMATION SHOWN ON THIS PAGE IS CONCEPTUAL. QUANTITIES REPORTED ARE ESTIMATED AND APPROXIMATED AND SHALL BE USED BY OTHERS ACCORDINGLY.

**APPROXIMATE DISTURBANCE AREA 5.9± ACRES
4.4% GRADE OF SOUTHWESTERLY SLOPE**

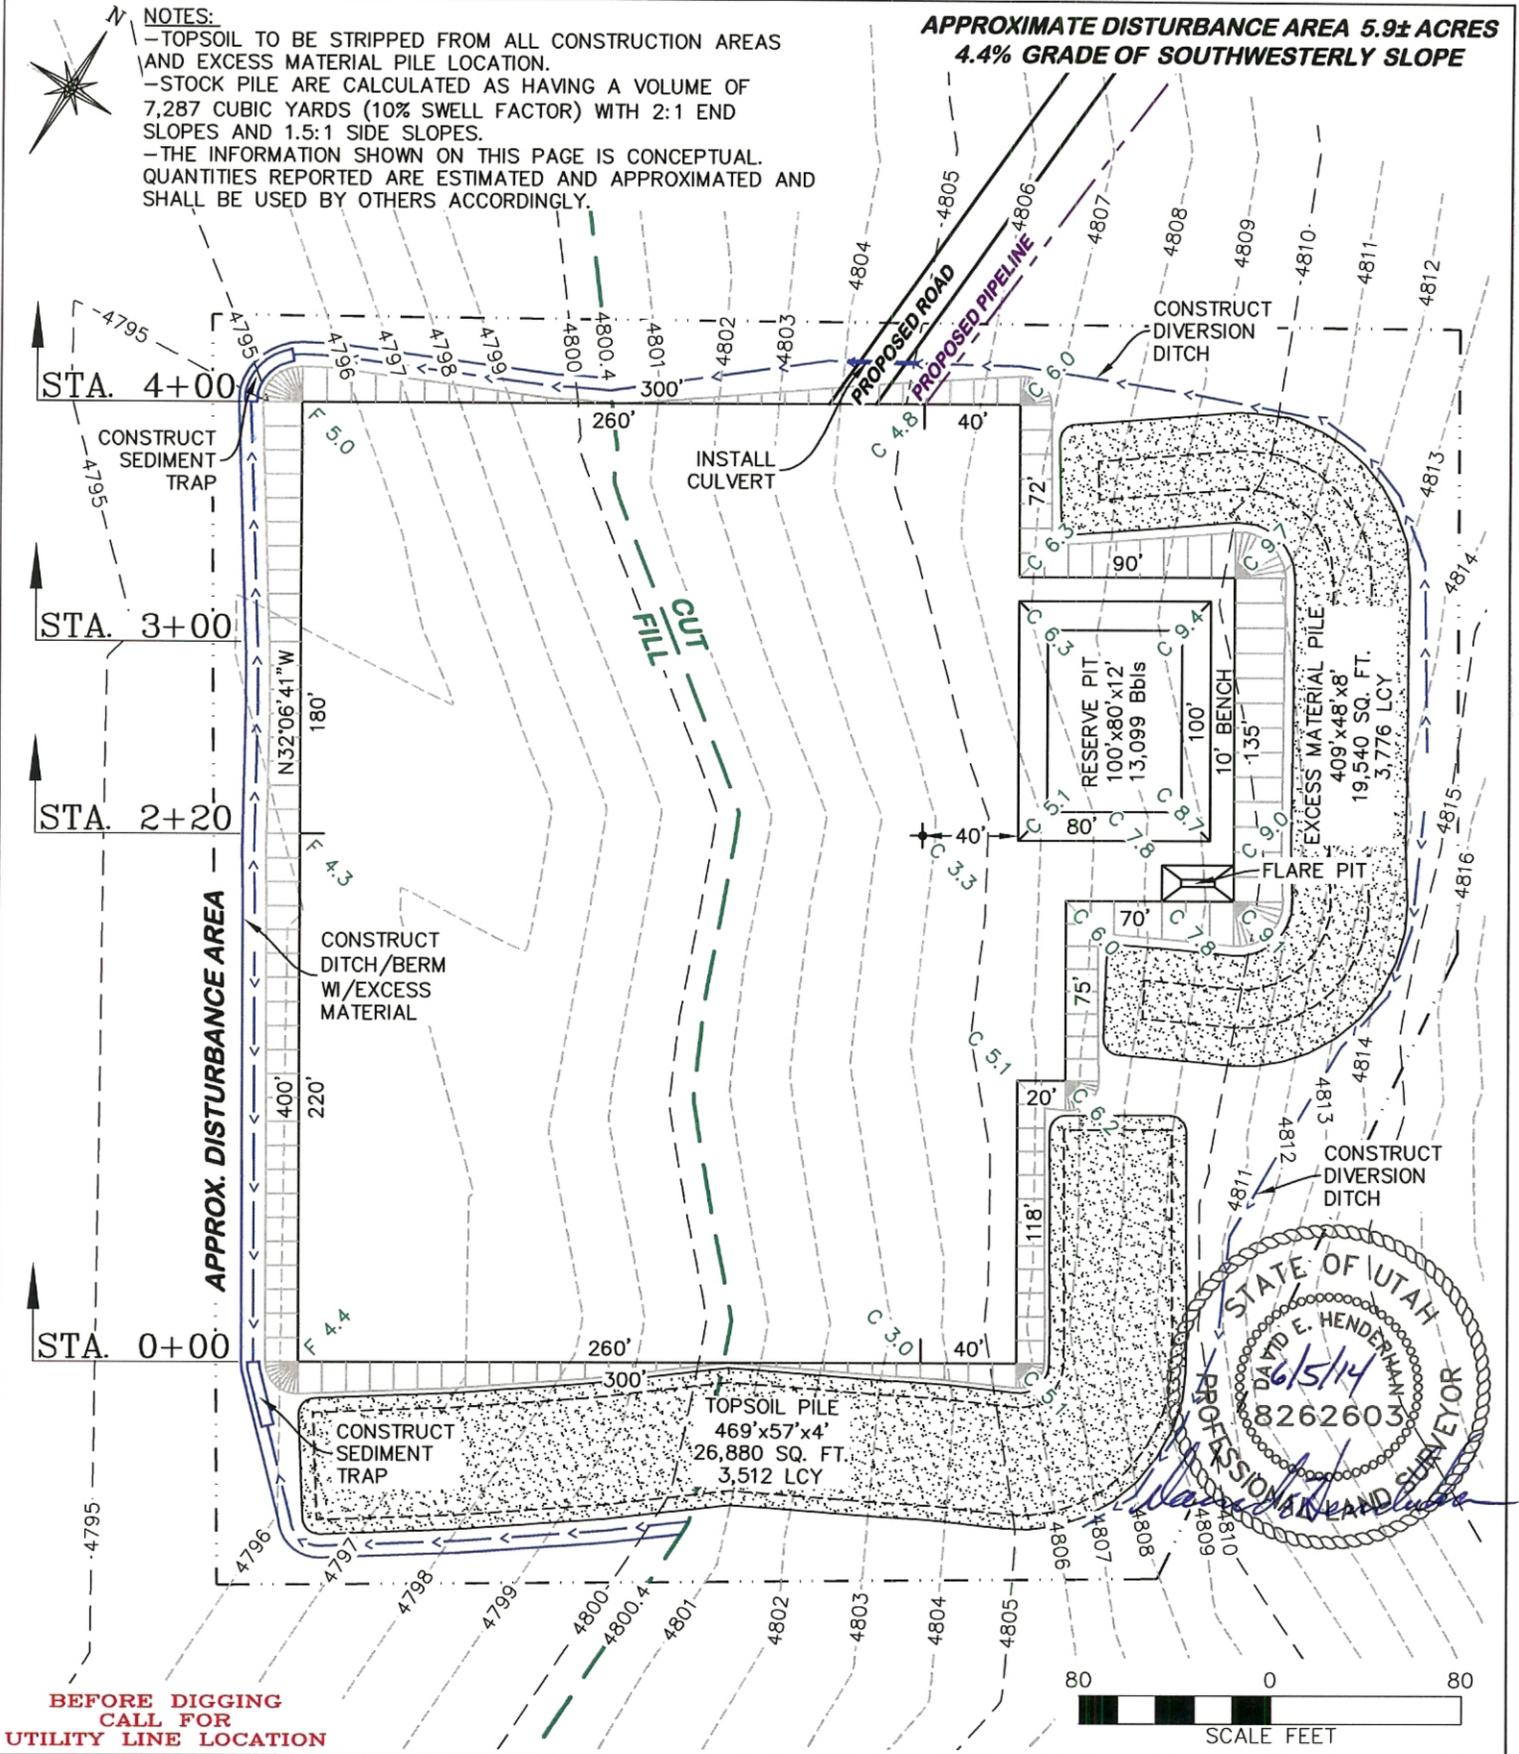


**BEFORE DIGGING
CALL FOR
UTILITY LINE LOCATION**

DRG RIFFIN & ASSOCIATES, INC.
 (307) 362-5028 1414 ELK ST., ROCK SPRINGS, WY 82901

DRAWN: 10/24/13 - TMH	SCALE: 1" = 80'
REVISED: 5/28/2014 - TCM	DRG JOB No. 20041
MOVED PAD	FIGURE 1


**CRESCENT POINT ENERGY
UTE TRIBAL 3-1-4-2E
SECTION 1, T. 4 S., R. 2 E.**

UNGRADED ELEVATION: 4803.7'
 FINISHED ELEVATION: 4800.4'

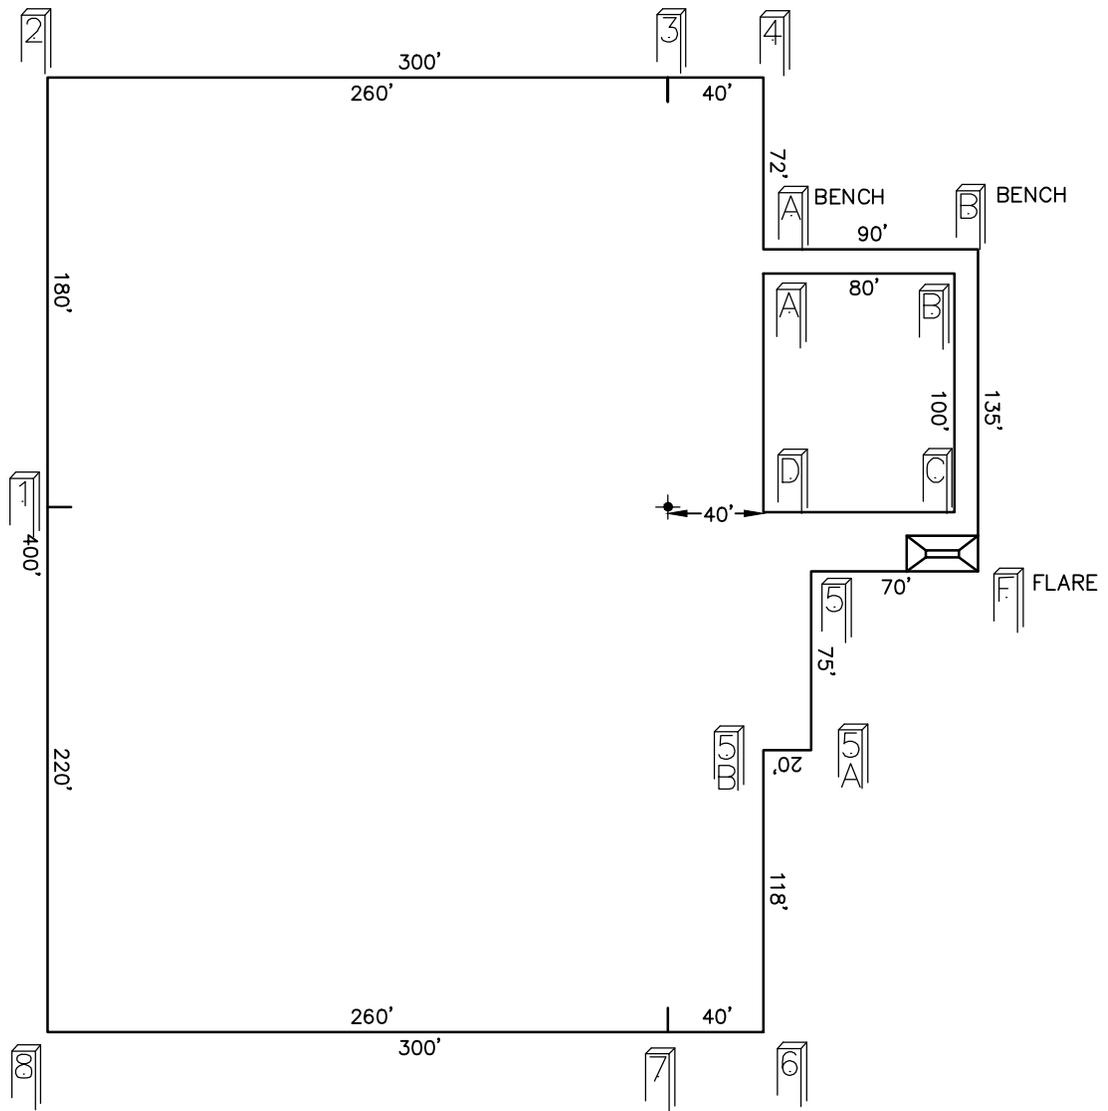




**BEFORE DIGGING
CALL FOR
UTILITY LINE LOCATION**

NOTE: THE INFORMATION SHOWN ON THIS PAGE IS CONCEPTUAL. QUANTITIES REPORTED ARE ESTIMATED AND APPROXIMATED AND SHALL BE USED BY OTHERS ACCORDINGLY.




 DRG RIFFIN & ASSOCIATES, INC. <small>(307) 362-5028 1414 ELK ST., ROCK SPRINGS, WY 82901</small>	
DRAWN: 10/24/13 - TMH	SCALE: 1" = 80'
REVISED: 5/28/2014 - TCM	DRG JOB No. 20041
MOVED PAD	FIGURE 1A

PAD LAYOUT CRESCENT POINT ENERGY UTE TRIBAL 3-1-4-2E SECTION 1, T. 4 S., R. 2 E. UNGRADED ELEVATION: 4803.7' FINISHED ELEVATION: 4800.4'

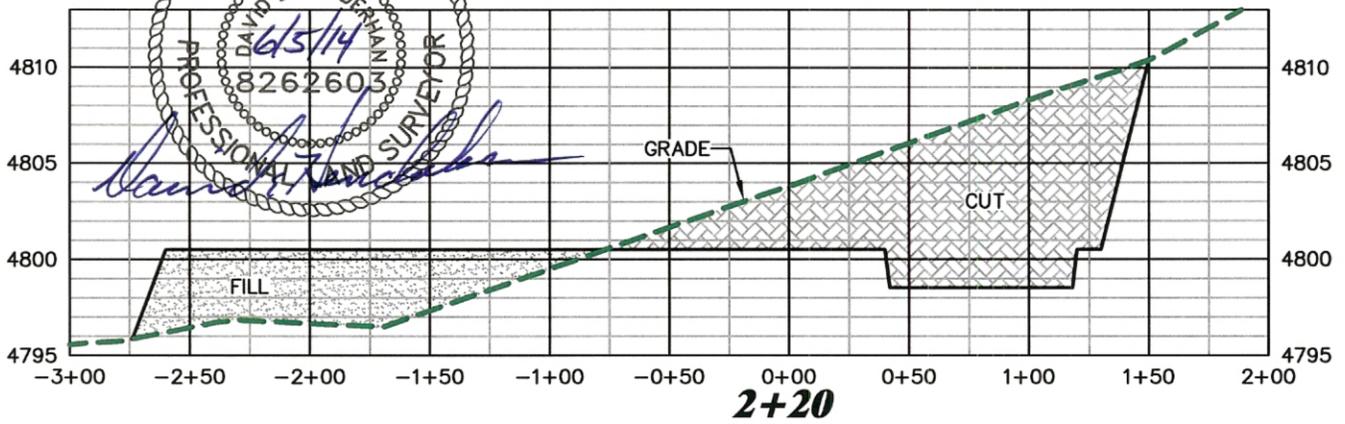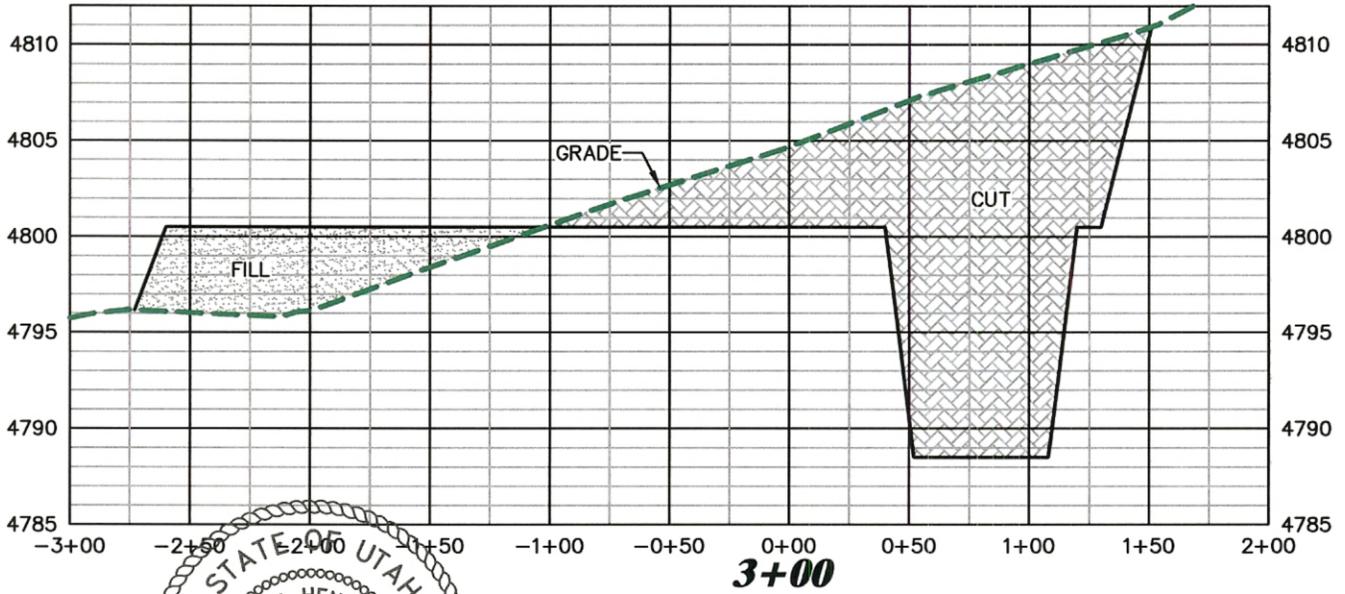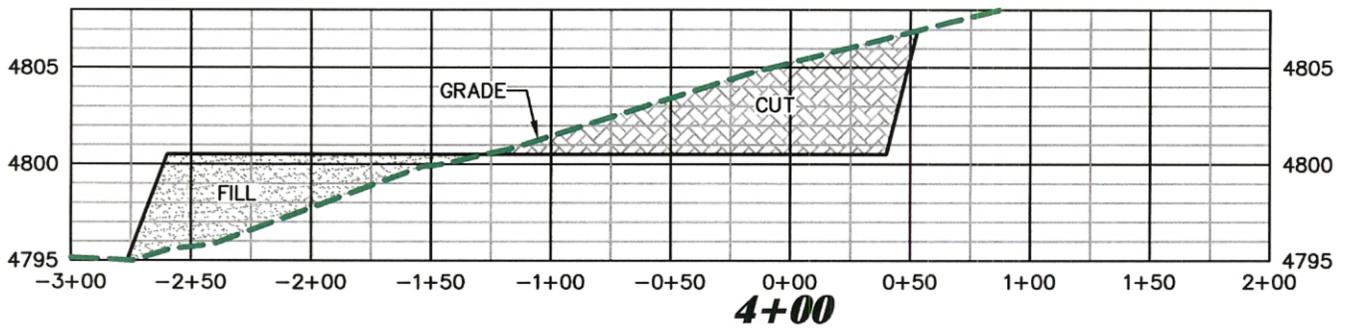

STATE OF UTAH
 DAVID E. HENDERMAN
 6/5/14
 8262603
 PROFESSIONAL LAND SURVEYOR

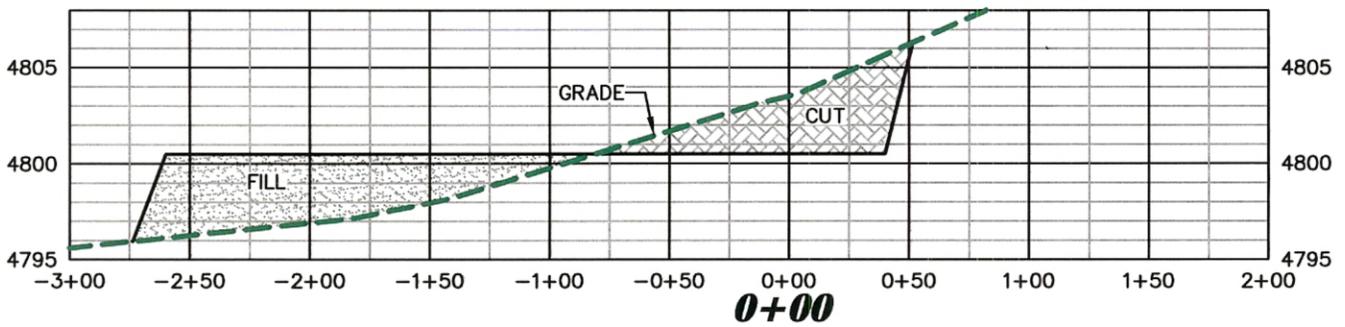

DRG RIFFIN & ASSOCIATES, INC.
 (307) 362-5028 1414 ELK ST., ROCK SPRINGS, WY 82901

**CRESCENT POINT ENERGY
 UTE TRIBAL 3-1-4-2E
 SECTION 1, T. 4 S., R. 2 E.**

DRAWN: 10/24/13 - TMH

SCALE: HORZ 1" = 80' VERT 1" = 10'


REVISED: 5/28/2014 - TCM

DRG JOB No. 20041


MOVED PAD

FIGURE 2

UNGRADED ELEVATION: 4803.7'
 FINISHED ELEVATION: 4800.4'

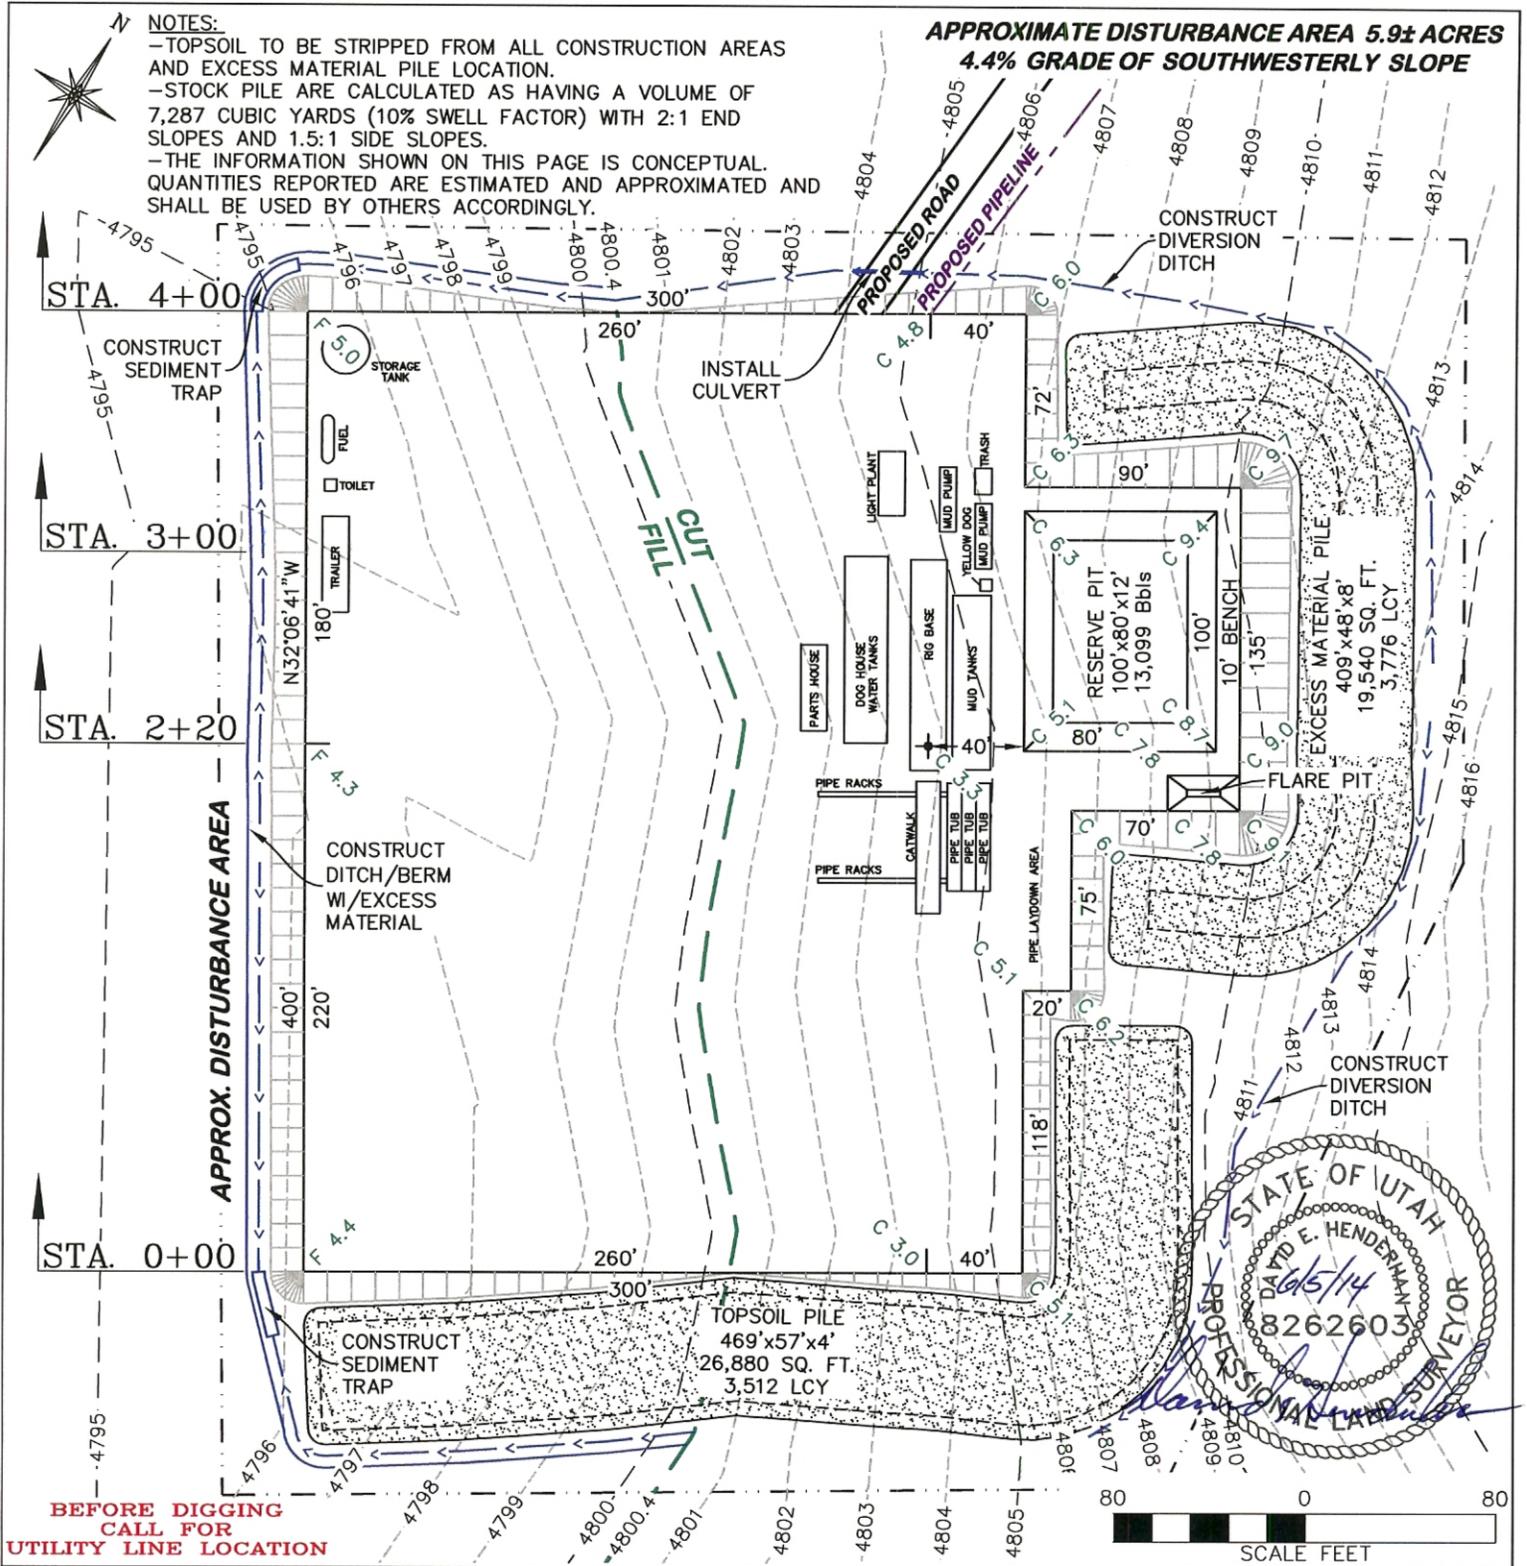

**BEFORE DIGGING
CALL FOR
UTILITY LINE LOCATION**



ESTIMATED EARTHWORK BANK					ESTIMATED EARTHWORK LOOSE (10% SWELL)				
ITEM	TOPSOIL	CUT	FILL	EXCESS	ITEM	TOPSOIL	CUT	FILL	EXCESS
PAD	3,192 BCY	7,699 BCY	7,690 BCY	9 BCY	PAD	3,512 LCY	8,469 LCY	7,690 LCY	779 LCY
PIT		2,724 BCY		2,724 BCY	PIT		2,996 LCY		2,996 LCY
TOTALS	3,192 BCY	10,423 BCY	7,690 BCY	2,733 BCY	TOTALS	3,512 LCY	11,466 LCY	7,690 LCY	3,776 LCY

DRG RIFFIN & ASSOCIATES, INC.
 1414 ELK ST., ROCK SPRINGS, WY 82901
 (307) 362-5028

DRAWN: 10/24/13 - TMH **SCALE: 1" = 80'**
REVISED: 5/28/2014 - TCM **DRG JOB No. 20041**
MOVED PAD **FIGURE 3**

CRESCENT POINT ENERGY
UTE TRIBAL 3-1-4-2E
SECTION 1, T. 4 S., R. 2 E.

UNGRADED ELEVATION: 4803.7'
FINISHED ELEVATION: 4800.4'


API Number: 43-047-54747

Well Name: Ute Tribal 3-1-4-2E


Township: 4S Range: 2E Section: 1 Meridian: USM

Operator: CRESCENT POINT ENERGY U.S. CORP

Map Prepared: Sept 25, 2014
Map Produced by Lisha Cordova

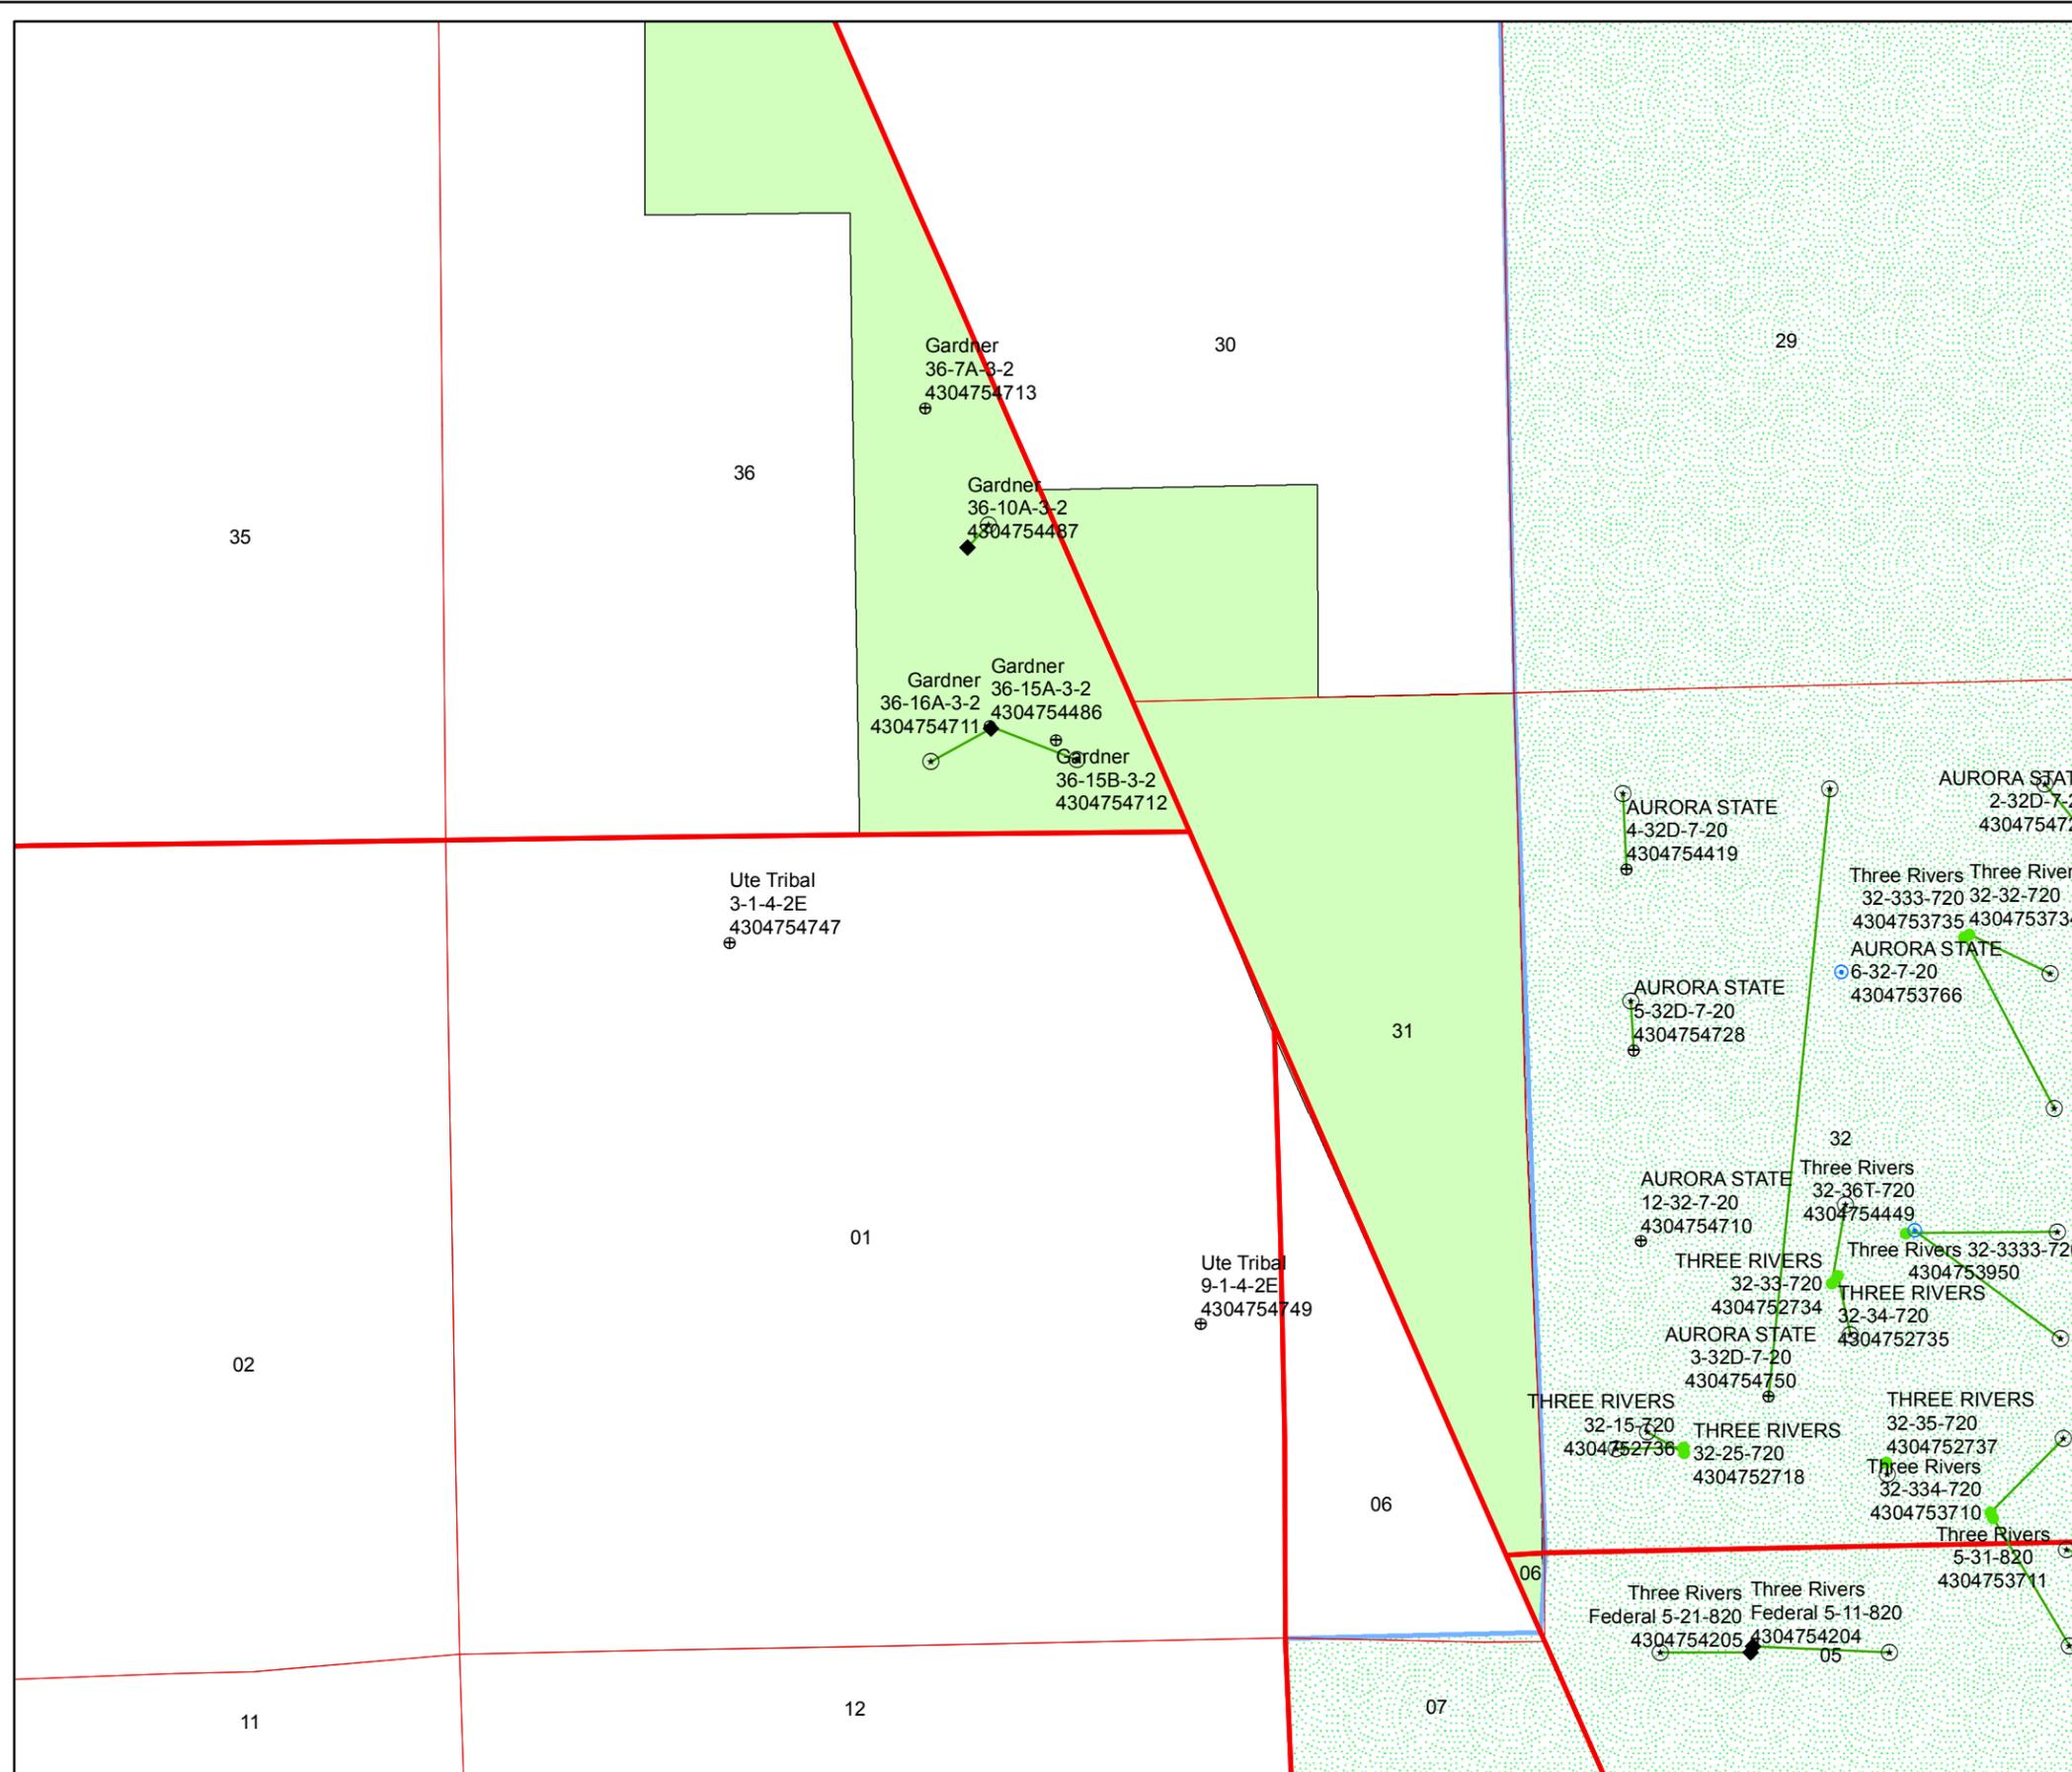

Wells Query		Units	
Status		STATUS	
◆ APD - Aproved Permit		ACTIVE	
⊙ DRL - Spuded (Drilling Commenced)		EXPLORATORY	
⚡ GIW - Gas Injection		GAS STORAGE	
⊛ GS - Gas Storage		NF PP OIL	
⊕ LOC - New Location		NF SECONDARY	
⚠ OPS - Operation Suspended		PI OIL	
⊖ PA - Plugged Abandoned		PP GAS	
⊙ PGW - Producing Gas Well		PP GEOTHERML	
● POW - Producing Oil Well		PP OIL	
⊙ SGW - Shut-in Gas Well		SECONDARY	
⊙ SOW - Shut-in Oil Well		TERMINATED	
⊙ TA - Temp. Abandoned			
⊙ TW - Test Well		Fields	
⊙ WDW - Water Disposal		STATUS	
⊙ WW - Water Injection Well		Unknown	
● WSW - Water Supply Well		ABANDONED	
		ACTIVE	
		COMBINED	
		INACTIVE	
		STORAGE	
		TERMINATED	

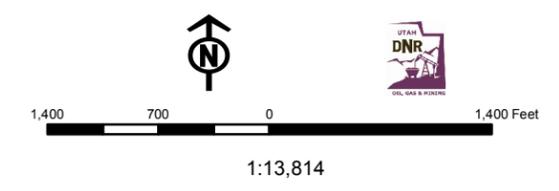

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 9/12/2014

API NO. ASSIGNED: 43047547470000

WELL NAME: Ute Tribal 3-1-4-2E

OPERATOR: CRESCENT POINT ENERGY U.S. CORP (N3935)

PHONE NUMBER: 720 880-3644

CONTACT: Emily Kate DeGrasse

PROPOSED LOCATION: NENW 01 040S 020E

Permit Tech Review:

SURFACE: 0705 FNL 1809 FWL

Engineering Review:

BOTTOM: 0705 FNL 1809 FWL

Geology Review:

COUNTY: UINTAH

LATITUDE: 40.16956

LONGITUDE: -109.72054

UTM SURF EASTINGS: 608945.46

NORTHINGS: 4447361.54

FIELD NAME: UNDESIGNATED

LEASE TYPE: 2 - Indian

LEASE NUMBER: 14-20-H62-6288

PROPOSED PRODUCING FORMATION(S): WASATCH

SURFACE OWNER: 2 - Indian

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

- PLAT
- Bond: INDIAN - LPM9080276
- Potash
- Oil Shale 190-5
- Oil Shale 190-3
- Oil Shale 190-13
- Water Permit: 47-1817
- RDCC Review:
- Fee Surface Agreement
- Intent to Commingle

Commingle Approved

LOCATION AND SITING:

- R649-2-3.
- Unit:
- R649-3-2. General
- R649-3-3. Exception
- Drilling Unit
- Board Cause No: R649-3-2
- Effective Date:
- Siting:
- R649-3-11. Directional Drill

Comments: Presite Completed

Stipulations: 4 - Federal Approval - Icordova
23 - Spacing - bhll



GARY R. HERBERT
Governor

SPENCER J. COX
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: Ute Tribal 3-1-4-2E
API Well Number: 43047547470000
Lease Number: 14-20-H62-6288
Surface Owner: INDIAN
Approval Date: 9/30/2014

Issued to:

CRESCENT POINT ENERGY U.S. CORP, 555 17th Street, Suite 750, Denver, CO 80202

Authority:

Pursuant to Utah Code Ann. 40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of R649-3-2. The expected producing formation or pool is the WASATCH Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well - contact Carol Daniels at 801-538-5284

(please leave a voicemail message if not available)

OR

submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website

at <http://oilgas.ogm.utah.gov>

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) - due within 5 days of spudding the well
- Monthly Status Report (Form 9) - due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) - due prior to implementation
- Written Notice of Emergency Changes (Form 9) - due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) - due prior to implementation
- Report of Water Encountered (Form 7) - due within 30 days after completion
- Well Completion Report (Form 8) - due within 30 days after completion or plugging

Approved By:



For John Rogers
Associate Director, Oil & Gas

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
5. LEASE DESIGNATION AND SERIAL NUMBER: 14-20-H62-6288	
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	
6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE	
7. UNIT or CA AGREEMENT NAME:	
1. TYPE OF WELL Oil Well	8. WELL NAME and NUMBER: Ute Tribal 3-1-4-2E
2. NAME OF OPERATOR: CRESCENT POINT ENERGY U.S. CORP	9. API NUMBER: 43047547470000
3. ADDRESS OF OPERATOR: 555 17th Street, Suite 750 , Denver, CO, 80202	PHONE NUMBER: 720 880-3621 Ext
9. FIELD and POOL or WILDCAT: UNDESIGNATED	
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0705 FNL 1809 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NENW Section: 01 Township: 04.0S Range: 02.0E Meridian: U	
COUNTY: UINTAH	
STATE: UTAH	

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/30/2015	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Crescent Point Energy US Corp respectfully requests a one-year extension of the state drilling permit for the referenced well.

Approved by the
 September 02, 2015
 Oil, Gas and Mining

Date: _____
 By:

NAME (PLEASE PRINT) Kristen Johnson	PHONE NUMBER 303 308-6270	TITLE Regulatory Technician
SIGNATURE N/A	DATE 9/1/2015	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047547470000

API: 43047547470000

Well Name: Ute Tribal 3-1-4-2E

Location: 0705 FNL 1809 FWL QTR NENW SEC 01 TWP 040S RNG 020E MER U

Company Permit Issued to: CRESCENT POINT ENERGY U.S. CORP

Date Original Permit Issued: 9/30/2014

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Kristen Johnson

Date: 9/1/2015

Title: Regulatory Technician Representing: CRESCENT POINT ENERGY U.S. CORP

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: 14-20-H62-6288
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Oil Well	8. WELL NAME and NUMBER: Ute Tribal 3-1-4-2E	
2. NAME OF OPERATOR: CRESCENT POINT ENERGY U.S. CORP	9. API NUMBER: 43047547470000	
3. ADDRESS OF OPERATOR: 555 17th Street, Suite 750 , Denver, CO, 80202	PHONE NUMBER: 720 880-3621 Ext	9. FIELD and POOL or WILDCAT: UNDESIGNATED
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0705 FNL 1809 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NENW Section: 01 Township: 04.0S Range: 02.0E Meridian: U		COUNTY: UINTAH
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/30/2016	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Crescent Point Energy US Corp respectfully requests a one-year extension of the state drilling permit for the referenced well.

Approved by the
August 31, 2016
Oil, Gas and Mining

Date: _____
By: 

NAME (PLEASE PRINT) Kristen Johnson	PHONE NUMBER 303 308-6270	TITLE Regulatory Technician
SIGNATURE N/A	DATE 8/30/2016	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047547470000

API: 43047547470000

Well Name: Ute Tribal 3-1-4-2E

Location: 0705 FNL 1809 FWL QTR NENW SEC 01 TWP 040S RNG 020E MER U

Company Permit Issued to: CRESCENT POINT ENERGY U.S. CORP

Date Original Permit Issued: 9/30/2014

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Kristen Johnson

Date: 8/30/2016

Title: Regulatory Technician Representing: CRESCENT POINT ENERGY U.S. CORP