

September 30, 2004

State of Utah Division of Oil, Gas & Mining Attn: Diana Whitney 1594 West North Temple - Suite 1210 P.O. Box 145801 Salt Lake City, Utah 84114-5801

> RE: Applications for Permit to Drill: Federal 3-33-8-18Federal 4-33-8-18Federal 5-33-8-18Federal 6-33-8-18Federal 7-33-8-18Federal 9-33-8-18Federal 10-33-8-18Federal 11-33-8-18

RECEIVED OCT 0 4 2004 DIV. OF OIL, GAS & MINING

Dear Diana:

Enclosed find APD's on the above referenced wells. The 8-13-9-16 and 13-13-9-16 are Exception Locations. I have contacted our Land Department in the Denver office and they will be providing you with the appropriate Exception Location Letters. If you have any questions, feel free to give either Brad or myself a call.

Sincerely,

Jana Aleler

Lana Nebeker Production Clerk

enclosures


••

	. •					
Form 3160-3 (September 2001)			FORM APPRO OMB No. 1004 Expires January 2	4-0136		
UNITED STATES	TEDIOD		5. Lease Serial No.			
DEPARTMENT OF THE IN BUREAU OF LAND MANAG	UTU-74872					
	6. If Indian, Allottee or T	ribe Name				
APPLICATION FOR PERMIT TO DR		N/A				
			7. If Unit or CA Agreemen	nt Name and No		
1a. Type of Work: 🖾 DRILL 🔲 REENTER			N/A	n, mane and mo.		
			8. Lease Name and Well N			
lb. Type of Well: 🖾 Oil Well 🗖 Gas Well 📮 Other	🗵 Single Zone 🛄 Multij	ole Zone	Federal 7-33-8-18			
2. Name of Operator			9. API Well No.			
Newfield Production Company			43-047-	35975		
	3b. Phone No. (include area code)		10. Field and Pool, or Explo	oratory		
Route #3 Box 3630, Myton UT 84052	(435) 646-3721		Eignt Min F 11. Sec., T., R., M., or Blk.	tat North		
4. Location of Well (Report location clearly and in accordance with a	any State requirements.*)		11. Sec., T., R., M., or Blk.	and Survey or Area		
At surface SW/NE 2145' FNL 1912' FEL 594 206	X 40.075848					
At proposed prod. zone 4436550	Y -109.895185		SW/NE Sec. 33, T	8S R18E		
			12. County or Parish	13. State		
14. Distance in miles and direction from nearest town or post office*			Uintah	UT		
Approximatley 22.3 miles south of Myton, Utah 15. Distance from proposed*	16. No. of Acres in lease	17 Sugain	g Unit dedicated to this well			
location to nearest	16. No. of Acres in lease	17. Spacin	ig Onit dedicated to this wen			
property or lease line, ft. (Also to nearest drig, unit line, if any) Approx. 495' f/lse, 1912' f/unit	677.36		40 Acres			
	19. Proposed Depth	20. BLM/	BIA Bond No. on file			
 Distance from proposed location* to nearest well, drilling, completed, 						
applied for, on this lease, ft. Approx. 1340'	6500'		UTU0056			
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approximate date work will sta	rt*	23. Estimated duration			
4960.5' GL	1st Quarter 2005		Approximately seven (7) days from spud to rig release.			
	24. Attachments					
The following, completed in accordance with the requirements of Onshor	e Oil and Gas Order No.1, shall be at	tached to this	s form:			
 Well plat certified by a registered surveyor. A Drilling Plan. A Surface Use Plan (if the location is on National Forest System SUPO shall be filed with the appropriate Forest Service Office). 	4. Bond to cover t Item 20 above). 5. Operator certific	he operation ation. specific info	ns unless covered by an exis	-		
25. Signature	Name (Printed/Typed)		¦ Dat	<u> </u>		
Fana J. beler	Lana Nebeker		· · · ·	1-30-04		
Production Clerk			1			
Approved by (Senature)	Name (Printed/Typed)		Dat			
Drallatit	BRADLEY	<u>a. Hill</u>	<u> </u>	0-06-04		
Niele	ENVIRONMENTAL S					
Application approval does not warrant or certify the the applicant holds le operations thereon. Conditions of approval, if any, are attached.	gal or equitable title to those rights in	the subject	lease which would entitle the	applicant to conduct		
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it States any false, fictitious or fraudulent statements or representations as to	a crime for any person knowingly and any matter within its jurisdiction.	nd willfully f	to make to any department of	agency of the United		
*(Instructions on reverse)			REC	CEIVED		

Action is Necessary

DIV. OF OIL, GAS & MINING

OCT 0 4 2004

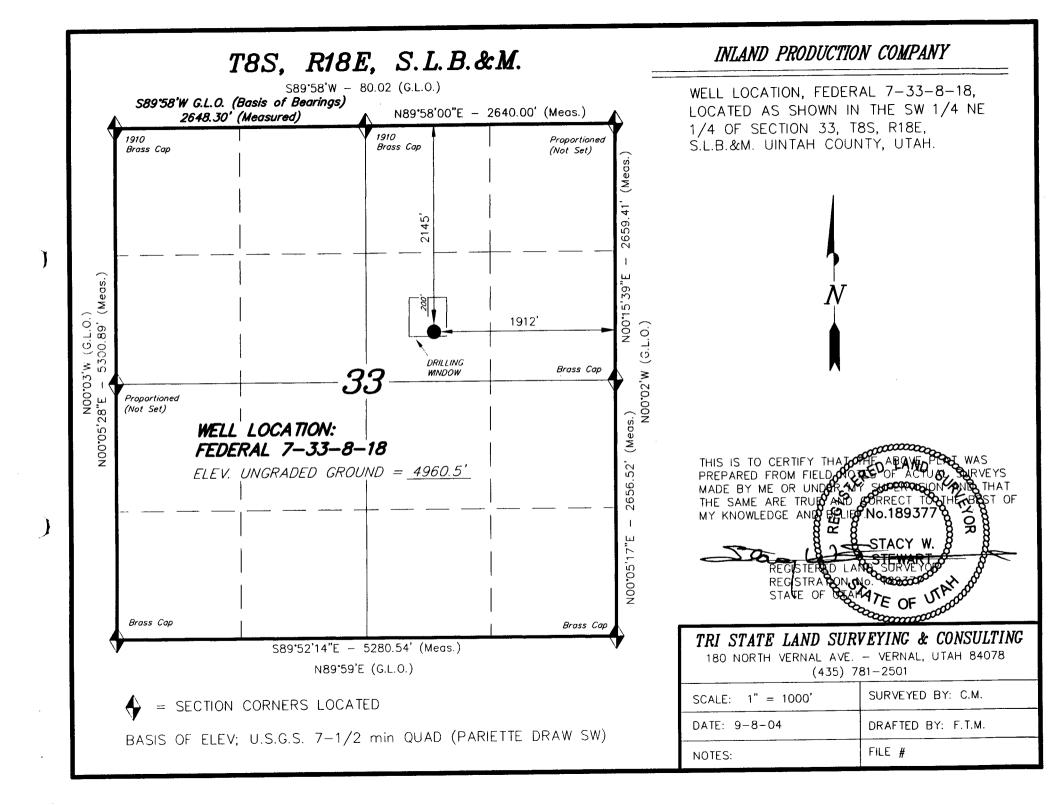

NEWFIELD PRODUCTION COMPANY FEDERAL 7-33-8-18 SW/NE SECTION 33, T8S, R18E UINTAH COUNTY, UTAH

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. <u>GEOLOGIC SURFACE FORMATION:</u>

Uinta formation of Upper Eocene Age

2. <u>ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:</u>

 Uinta
 0' – 1640'

 Green River
 1675'

 Wasatch
 6240'

3. <u>ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:</u>

Green River Formation 1675' - 6240' - Oil

4. **PROPOSED CASING PROGRAM**

Please refer to the Monument Butte Field Standard Operation Procedure (SOP).

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

Please refer to the Monument Butte Field SOP. See Exhibit "C".

6. TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:

Please refer to the Monument Butte Field SOP.

7. AUXILIARY SAFETY EQUIPMENT TO BE USED:

Please refer to the Monument Butte Field SOP.

8. <u>TESTING, LOGGING AND CORING PROGRAMS:</u>

Please refer to the Monument Butte Field SOP.

9. ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:

The anticipated maximum bottom hole pressure is 2000 psi. It is not anticipated that abnormal temperatures will be encountered.

10. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:

Please refer to the Monument Butte Field SOP.

NEWFIELD PRODUCTION COMPANY FEDERAL #7-33-8-18 SW/NE SECTION 33, T8S, R18E UINTAH COUNTY, UTAH

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. <u>EXISTING ROADS</u>

See attached Topographic Map "A"

To reach Newfield Production Company well location site Federal #7-33-8-18 located in the SW 1/4 NE 1/4 Section 33, T8S, R18E, Uintah County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.6 miles \pm to the junction of this highway and UT State Hwy 53; proceed southeasterly along Hwy 53 - 13.8 miles \pm to it's junction with an existing dirt road to the north; proceed northerly \pm 0.3 miles \pm to it's junction with an existing road to the east; proceed northeasterly \pm 6.5 miles to it's junction with an existing road to the north \pm 0.1 to it's junction with the beginning of the proposed access road; proceed northeasterly along the proposed access road - 4,540 \pm to the proposed well location.

2. PLANNED ACCESS ROAD

See Topographic Map "B" for the location of the proposed access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

Please refer to the Monument Butte Field Standard Operating Procedure (SOP).

5. LOCATION AND TYPE OF WATER SUPPLY

Please refer to the Monument Butte Field SOP. See Exhibit "A".

6. <u>SOURCE OF CONSTRUCTION MATERIALS</u>

Please refer to the Monument Butte Field SOP.

7. METHODS FOR HANDLING WASTE DISPOSAL

Please refer to the Monument Butte Field SOP.

8. <u>ANCILLARY FACILITIES</u>

Please refer to the Monument Butte Field SOP.

9. <u>WELL SITE LAYOUT</u>

See attached Location Layout Diagram.

10. PLANS FOR RESTORATION OF SURFACE

Please refer to the Monument Butte Field SOP.

11. SURFACE OWNERSHIP - Bureau Of Land Management

12. OTHER ADDITIONAL INFORMATION

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. MOAC Report #03-154, 02/3/04. Paleontological Resource Survey prepared by, Wade E. Miller, 5/12/04. See attached report cover pages, Exhibit "D".

For the Federal #7-33-8-18 Newfield Production Company requests 2,395' of disturbed area be granted in Lease UTU-74872 to allow for construction of the proposed access road. **Refer to Topographic Map "B".** The proposed access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%. There will be no culverts required along this access road. There will be barrow ditches and turnouts as needed along this road. There are no fences encountered along this proposed road. There will be no new gates or cattle guards required. All construction material for this access road will be borrowed material accumulated during construction of the access road.

Newfield Production Company requests 2890' of disturbed area be granted in Lease UTU-74872 to allow for construction of the proposed gas lines. It is proposed that the ROW and disturbed area will be 50' wide to allow for construction of a 3" gas gathering line, and a 2" poly fuel gas line. Both lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."** For a ROW plan of development, please refer to the Monument Butte Field SOP.

Newfield Production Company requests 2890' of disturbed area be granted in Lease UTU-74872 to allow for construction of the proposed water lines. It is proposed that the ROW and disturbed area will be 50' wide to allow for construction of a buried 3" steel water injection line and a 3" poly water return line. **Refer to Topographic Map "C."** For a ROW plan of development, please refer to the Monument Butte Field SOP.

Threatened, Endangered, And Other Sensitive Species

Dixie Sadler to advise.

Location and Reserve Pit Reclamation Please refer to the Monument Butte Field SOP.

The following seed mixture will be used on the topsoil stockpile, to the recontoured surface of the reserve pit, and for final reclamation: (All poundages are in pure live seed)

Gardners Salt Bush	Atriplex Gardner	4 lbs/acre
Mat Saltbush	Atriplex Gardneri	4lbs/acre
Crested Wheat Grass		4lbs/acre

Details of the On-Site Inspection

The proposed Federal #7-33-8-18 was on-sited on 5/20/04. The following were present; Brad Mecham (NewfieldProduction), David Gerbig (Newfield Production), Byron Tolman (Bureau of Land Management). Weather conditions were clear.

13. LESSEE'S OR OPERATORS REPRESENTATIVE AND CERTIFICATION

Representative

Name:Brad MechamAddress:Route #3 Box 3630
Myton, UT 84052

Telephone: (435) 646-3721


Certification


Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #7-33-8-18 SW/NE Section 33, Township 8S, Range 18E: Lease UTU-74872 Uintah County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by Hartford Accident #4488944.


I hereby certify that the proposed drillsite and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.


e Ver ana Nebeker


Production Clerk

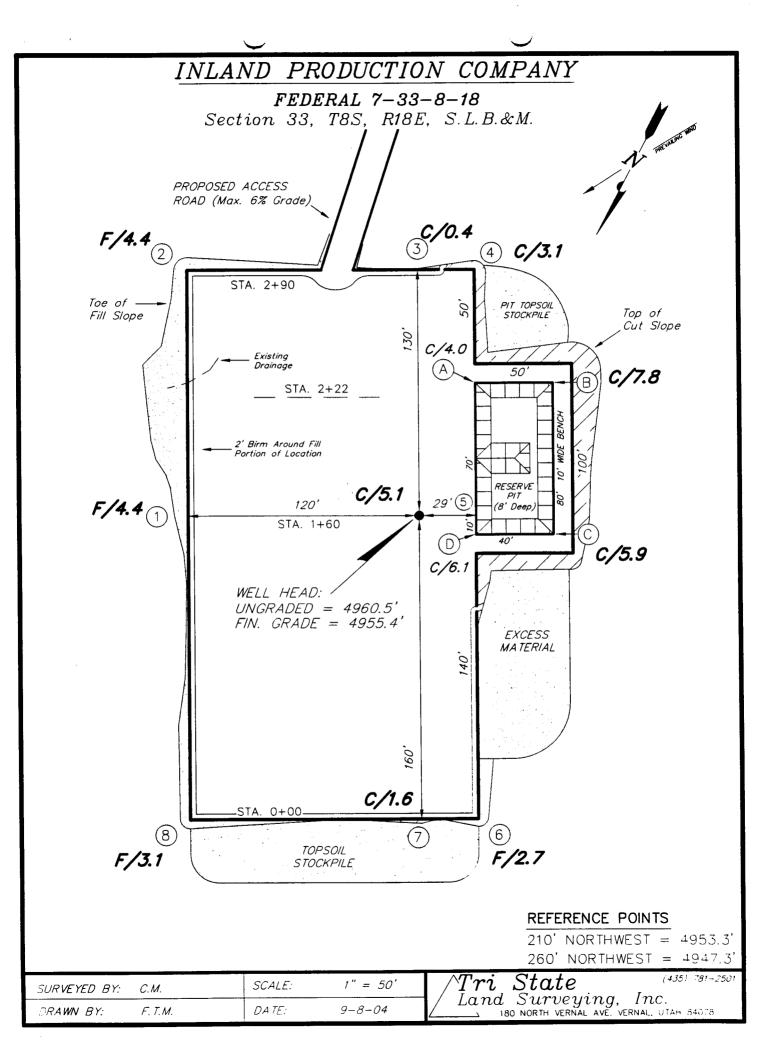


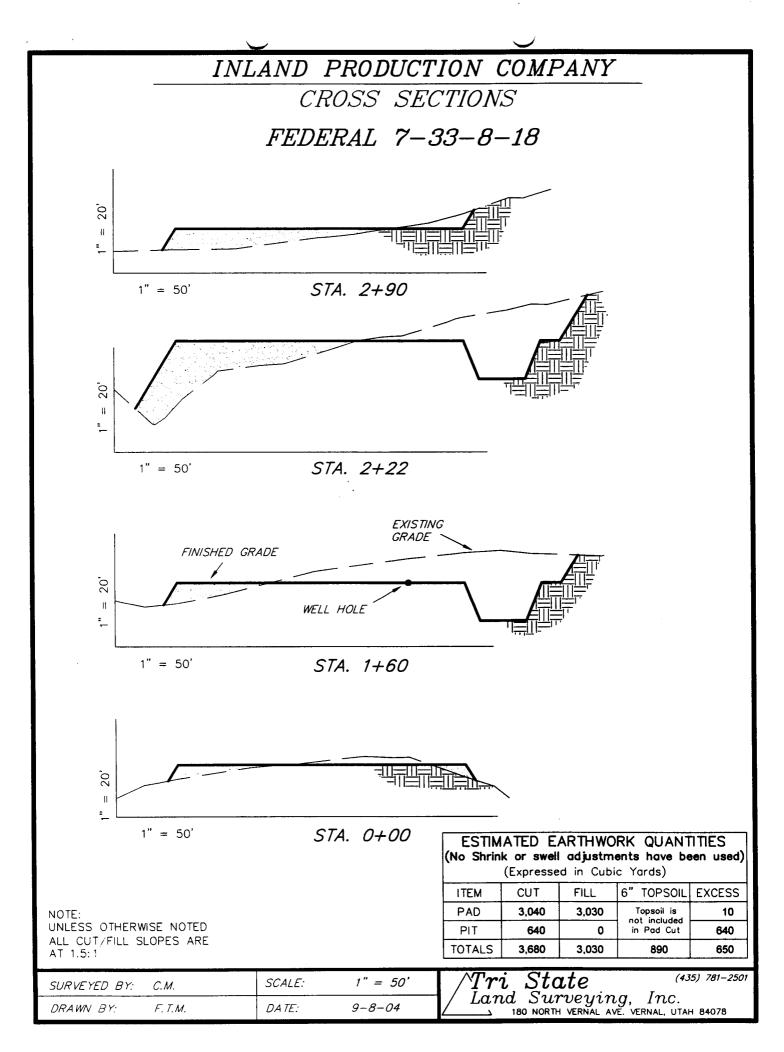

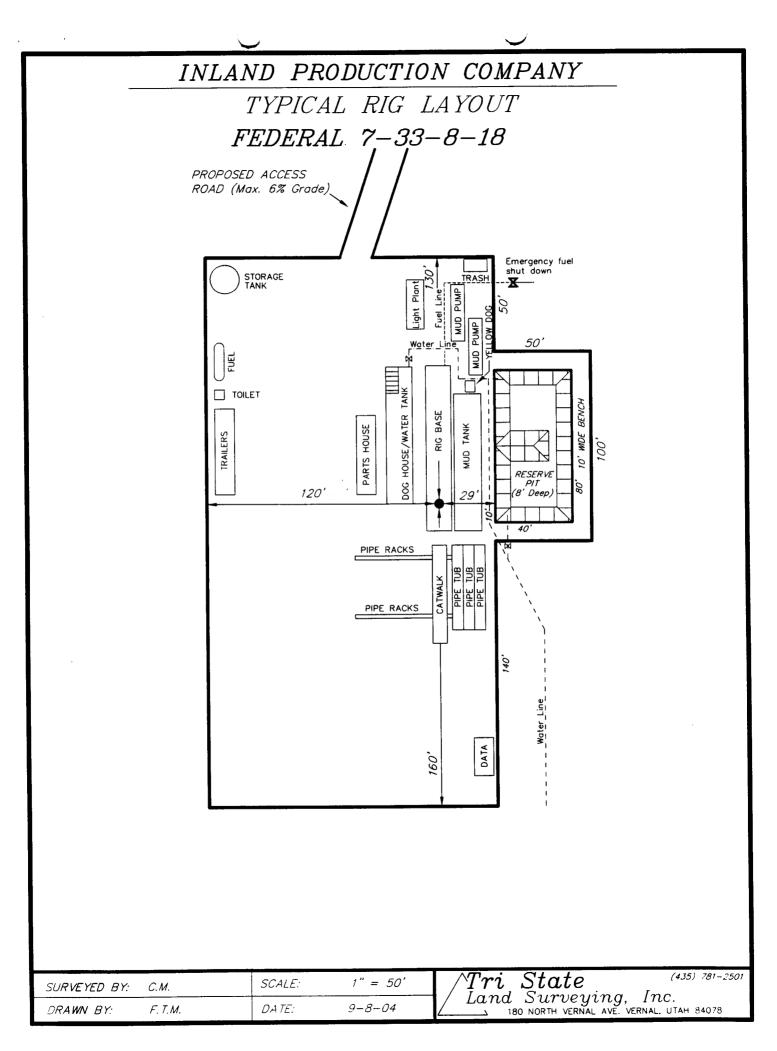


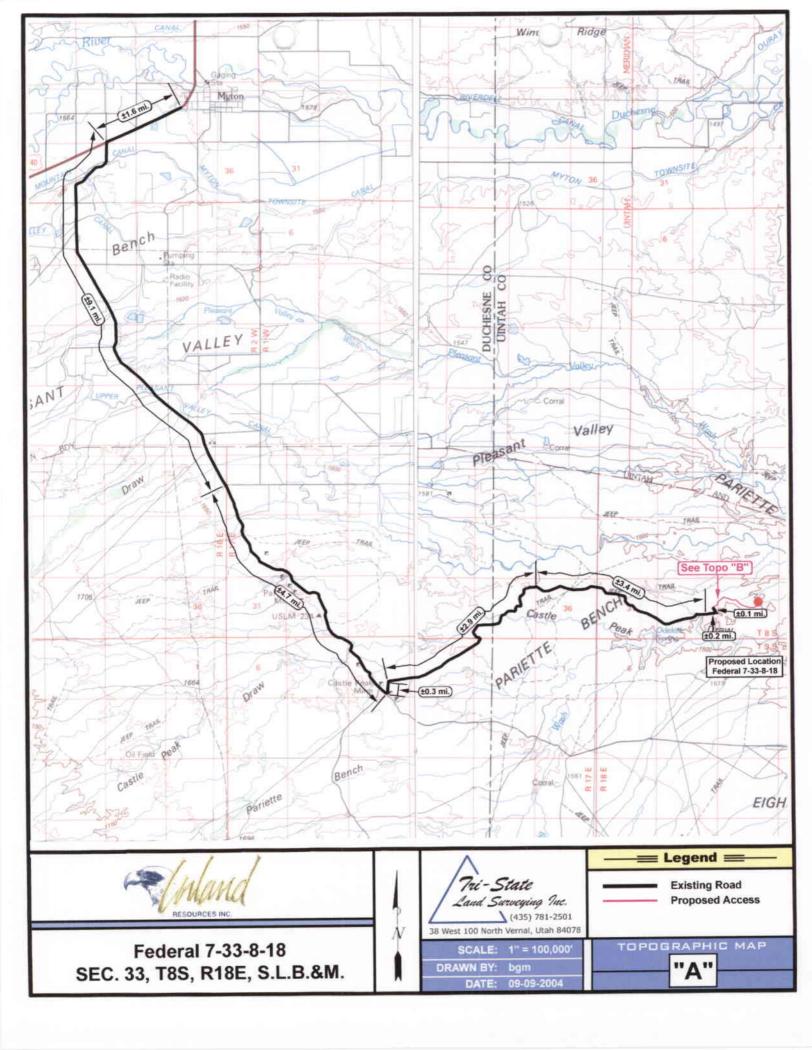

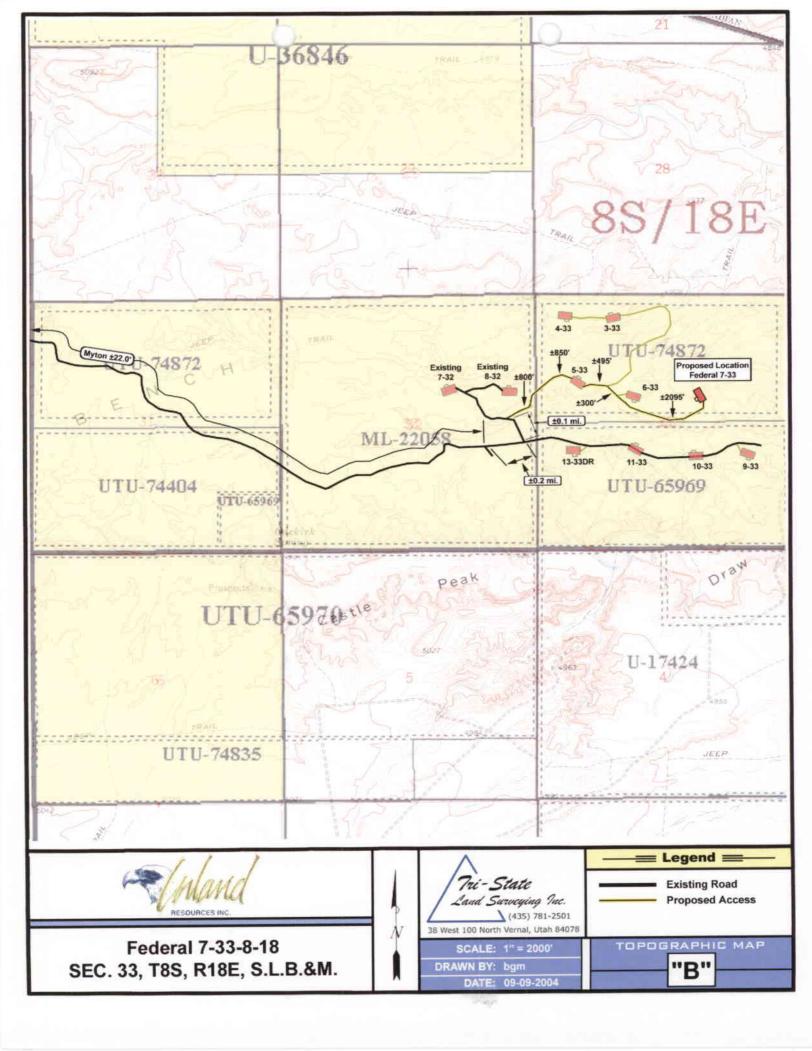

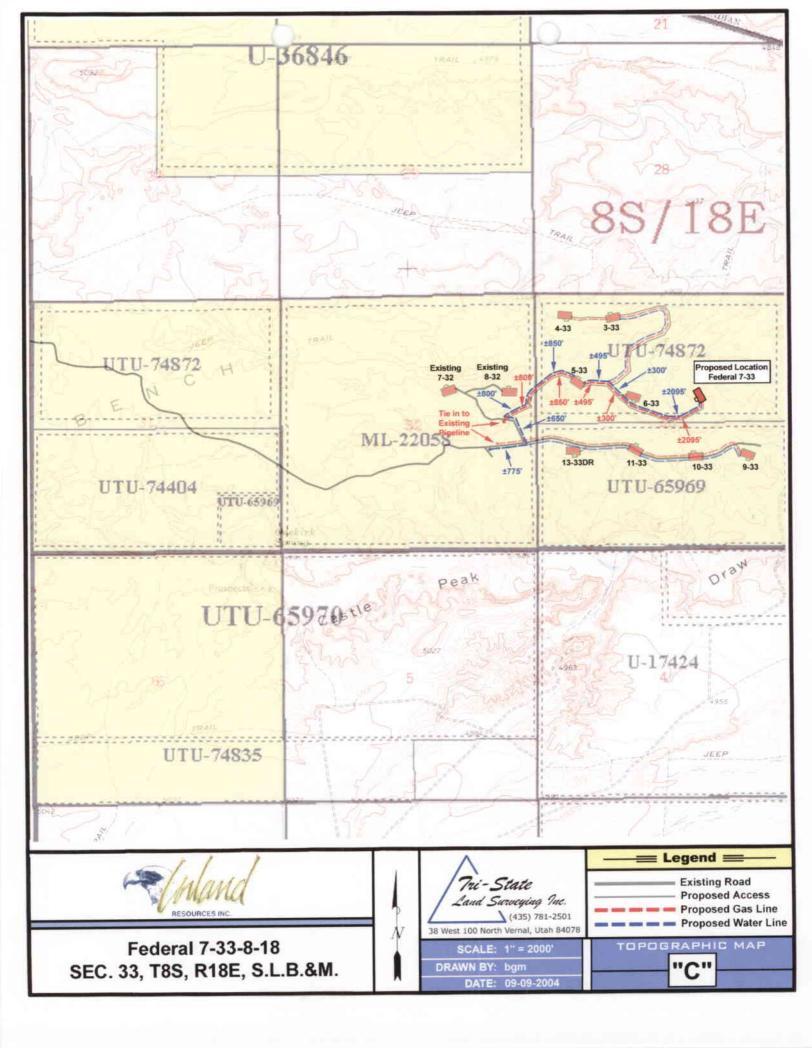


18	16	34	13	18	12 1		м	13	10	17	18	18	54	50	Iniand Wells
21	22	# 48-R3W	24	17 14-18		148-R2W		234 22 ¹⁵ 4 1551 13	19. Sa	22	T4S-R	22 22	23 11-23 14-23	в	Outling Outling on Completion Walting on Completion Producing Oil Well Producing Cas Well Water Injection Well Whater Injection Well
28	27	28	л	N 20	20 21 21	15 22 maskeys	14 35 50 10 44 10 50 50 54 10 60 60	13 Africanti has been been been	10 ⁻²⁷ 0000 100-00200	1 / 100	R17Ener na in his in his dan single in his his his dan single	a 42 a	1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	21 24 - 23 - 14	 F Temporarily Abandoned Piuggad & Abandoned Shut in Water Source Well Water Disposal Well
33	34	35		30 29	T8S-	RIOE 40	de la de la de la de la de la de	1 3. 8 3. 1.	1 10 10 10 10 10 10 10 10 10 10 10 10 10	da la la da da _n da la la ca da la da la	1 60 / 20	1 1.07 4 4 4 4 1	134 1421 H-28 21-00 3	-20 529 -20 529 -20 520 -20 520 -20 520	Injection stations
C.4.		ada se se	r3a	n faring	to the set of the set	in he in he he in he in non to he	un sin un in in in n sin un un in in un (n un in un in	her in La in La	ก็อริม เป็น 452 1 _ม เป็น 451 เริ่ม สมัน 151	la una des etal su _{tu} la su la da ^{des} la con	10 60 100 100 100	4 434 4 434 4 434	una da da a	in the the she for the she and the she she she she she she she	งไฟ เสีย เงิน ฟา้ม เงิ้ม เงิน เงิน มาม เงิน เงิน เงิน เงิน
•	S-Rav	2 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	4 6 4 6 6 4 6 4	storten da ha?	to the man for the la	1 1 h	4 6 4 4 4 4	E Mush 1. 2	a ha da sa	the he is	Ĥ	44 64 64 6	. he is , is is . 	5	nin S
18	18 1-15 2-11 18 2-15 2-11 19 2-15 2-11 19 2-11 19 2-11		A. 6. 4 1	1 4 A & A &	to be its her	the sto alm	in sum in in in	the works	, star 19 , 19 6. 1941 to 18 18 64	the part of the state of the st	54 25-00 640 14 25-00 640 15 14 14 15 15 10 15 15 15 10 15 15 10 15 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 1	31-41V	11 13		
21	15 15 15 15 15 15 15 15 15 15 15 15 15 1	1450 1500 1500 050 050 531 134 535 1454 5		140 100 100 100 11 100 10 100	15 45-11	202-10.20	galan I aban f a sta sta sta	star yan	tarta da ho	21-17 1-17 1-11 1.11	143 24 162 44 264	-n 	14 ^{32.54} 13 44.544	Of a special h	
25	22 T S	S-R15E هٹوندہ م	4 10.349	and the second se	4.00 1100-110 Adra 31000 4 2 21	1. 1. 12	30 121 22	24	18 19 114	300 20	د الله الله الله الله الله الله الله الل		23 24 24		av hän da Invatar skav si after skav si after si
53	27	Ž 28 2	5	30 31	28	#	101 E	25-23Y 25	41-00 30	28	28 27		25 2	⊧ 30 Γ	
•	34	35 3		21 3	1 33	34	35	56	51	12	33 54		35 3		Exhibit A Uinth Basin, Utab Dateer & Unab Course
•	3):	36 , 045C	ê.		7183-1	tioe,	2	C C		1	103-R17E		2		lann Tura Tulaing 441110 (kan Kala Inne Inner Calenda 1905-001 Kan (200 1934)10 - Turay - 20

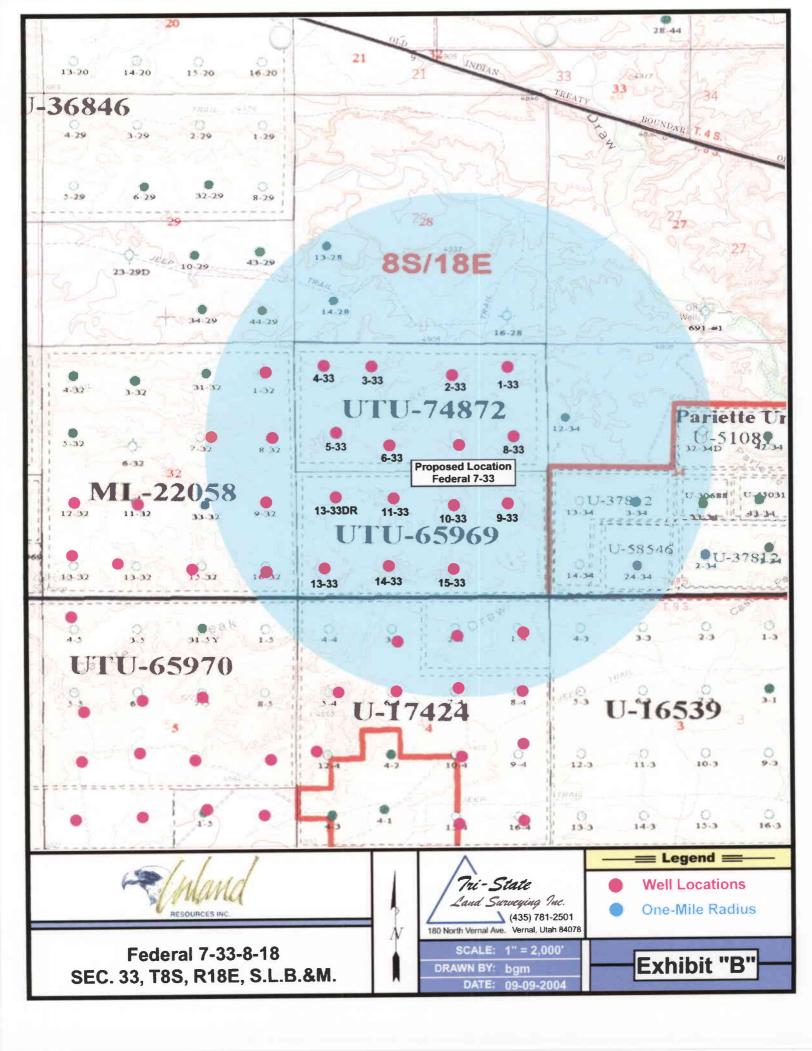

2-M SYSTEM Blowout Prevention Equipment Systems

· · · ·

.

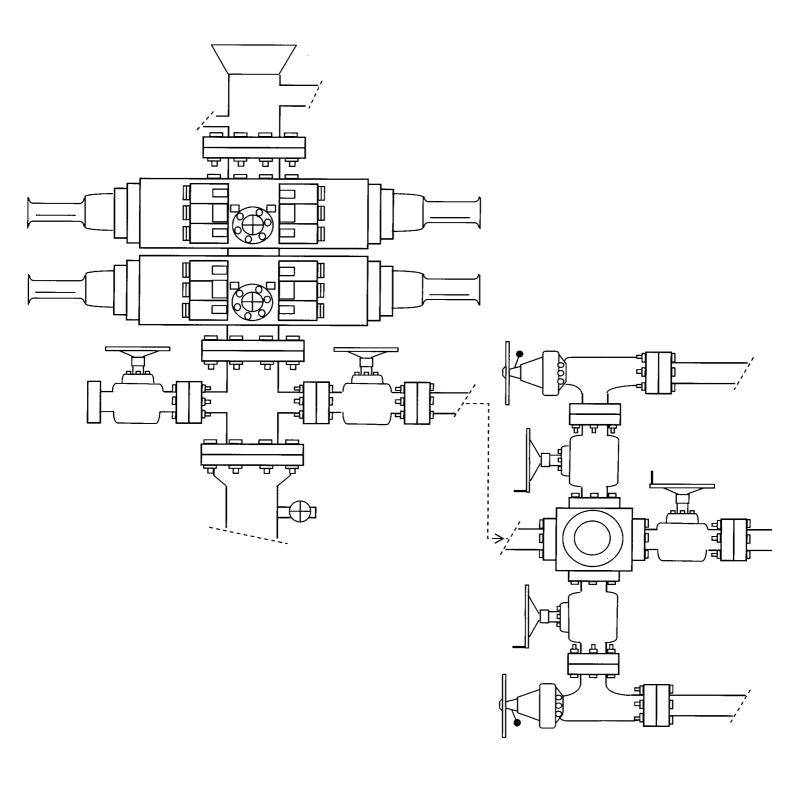

CULTURAL RESOURCE INVENTORY OF INLAND PRODUCTIONS PARCEL IN T 8 S, R18 E, SEC. 33 AND T 9 S, R 18 E, SEC. 3 & 4, UINTAH COUNTIES, UTAH

Exhibit"D" page lof4

BY: Katie Simon and Keith R. Montgomery

Prepared For:

Bureau of Land Management Vernal Field Office

Prepared Under Contract With:

Inland Production Route 3, Box 3630 Myton, UT 84052


Prepared By:

Montgomery Archaeological Consultants P.O. Box 147 Moab, Utah 84532

MOAC Report No. 03-154

February 3, 2004

United States Department of Interior (FLPMA) Permit No. 03-UT-60122

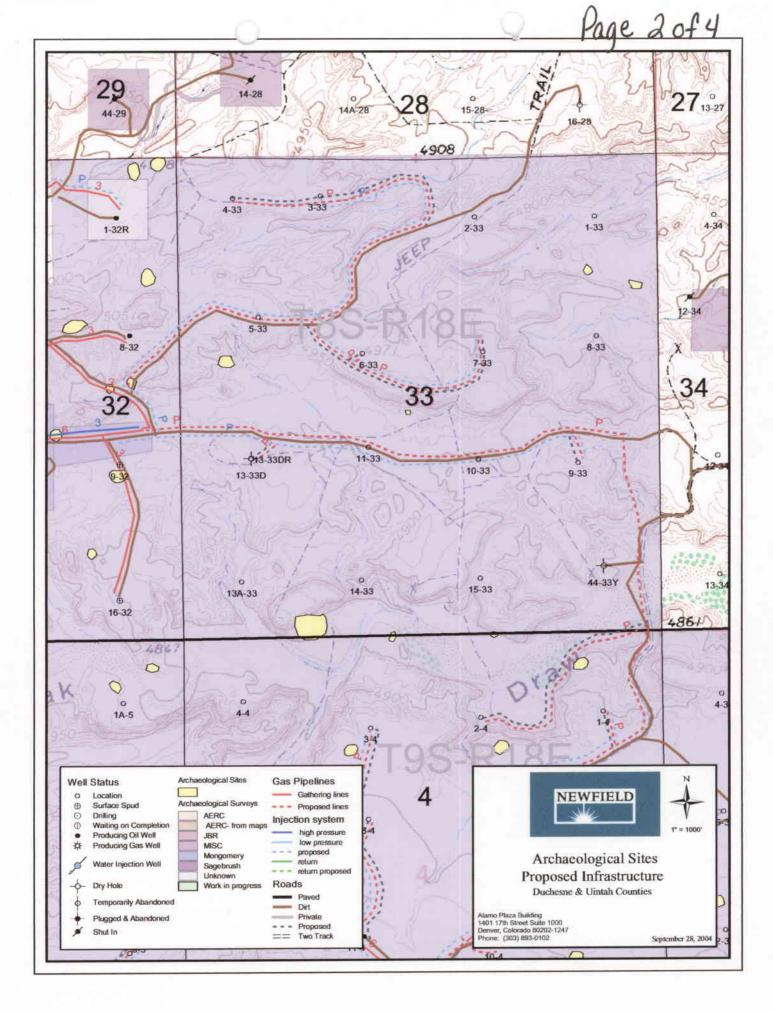State of Utah Antiquities Project (Survey) Permit No. U-03-MQ-0799b 

Page 30f4

,t

INLAND RESOURCES, INC.

PALEONTOLOGICAL FIELD SURVEY OF PROPOSED PRODUCTION DEVELOPMENT AREAS, UINTAH COUNTY, UTAH

(Section 33, T 8 S, R 18 E; & Section 6, T 9 S, R 19 E)


REPORT OF SURVEY

Prepared for:

Inland Resources, Inc.

Prepared by:


Wade E. Miller Consulting Paleontologist May 12, 2004

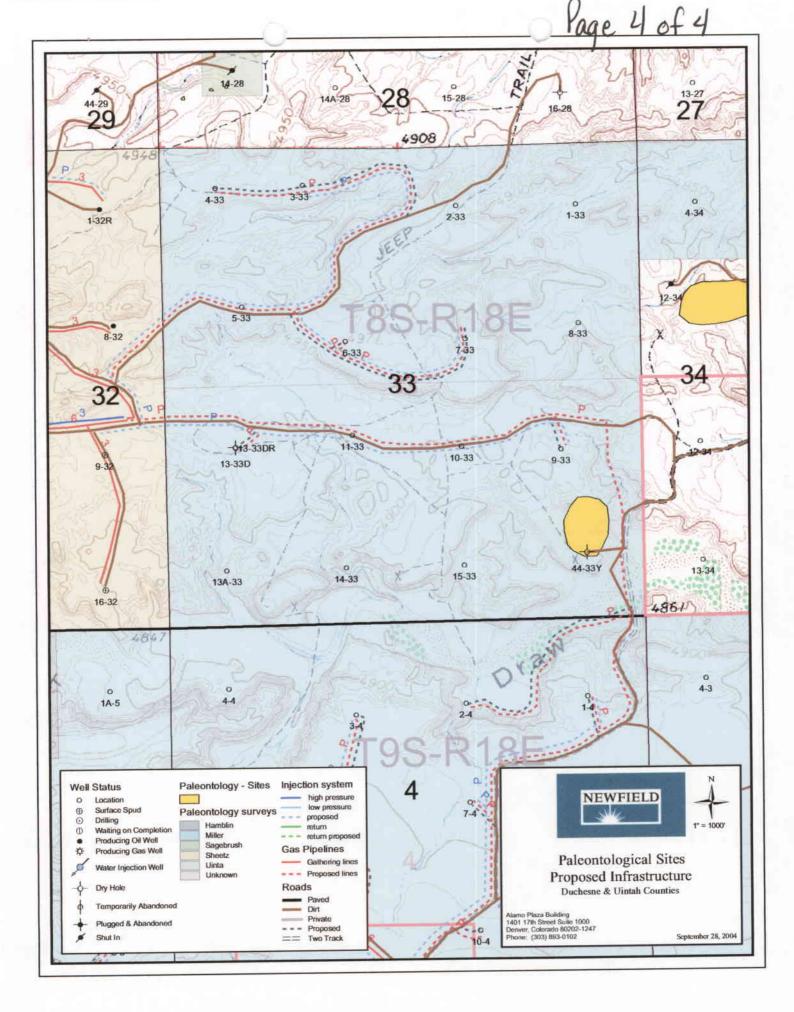

004

WORKSHEET APPLICATION FOR PERMIT TO DRILL

EDEDAL 7-33-9-19	
FEDERAL 7-33-8-18 OPERATOR: NEWFIELD PRODUCTION (N.	
	PHONE NUMBER: 435-646-3721
CONTACT: LANA NEBEKER	PHONE NOMBER: 455 646 5721
PROPOSED LOCATION:	INSPECT LOCATN BY: / /
SWNE 33 080S 180E SURFACE: 2145 FNL 1912 FEL	
BOTTOM: 2145 FNL 1912 FEL	Tech Review Initials Date
UINTAH	Engineering
8 MILE FLAT NORTH (590)	Geology
EASE TYPE: 1 - Federal	Surface
LEASE NUMBER: UTU-74872 SURFACE OWNER: 1 - Federal PROPOSED FORMATION: GRRV	LATITUDE: 40.07585 LONGITUDE: -109.8952
<pre>✓ Plat ✓ Bond: Fed[1] Ind[] Sta[] Fee[] (No. UTU0056) N Potash (Y/N) N Oil Shale 190-5 (B) or 190-3 or 1 ✓ Water Permit (No. MUNICIPAL) N RDCC Review (Y/N) (Date:) N Fee Surf Agreement (Y/N)</pre>	R649-3-3. Exception Drilling Unit Board Cause No: Eff Date: Siting: R649-3-11. Directional Drill
STIPULATIONS: Spacing) A harrow of

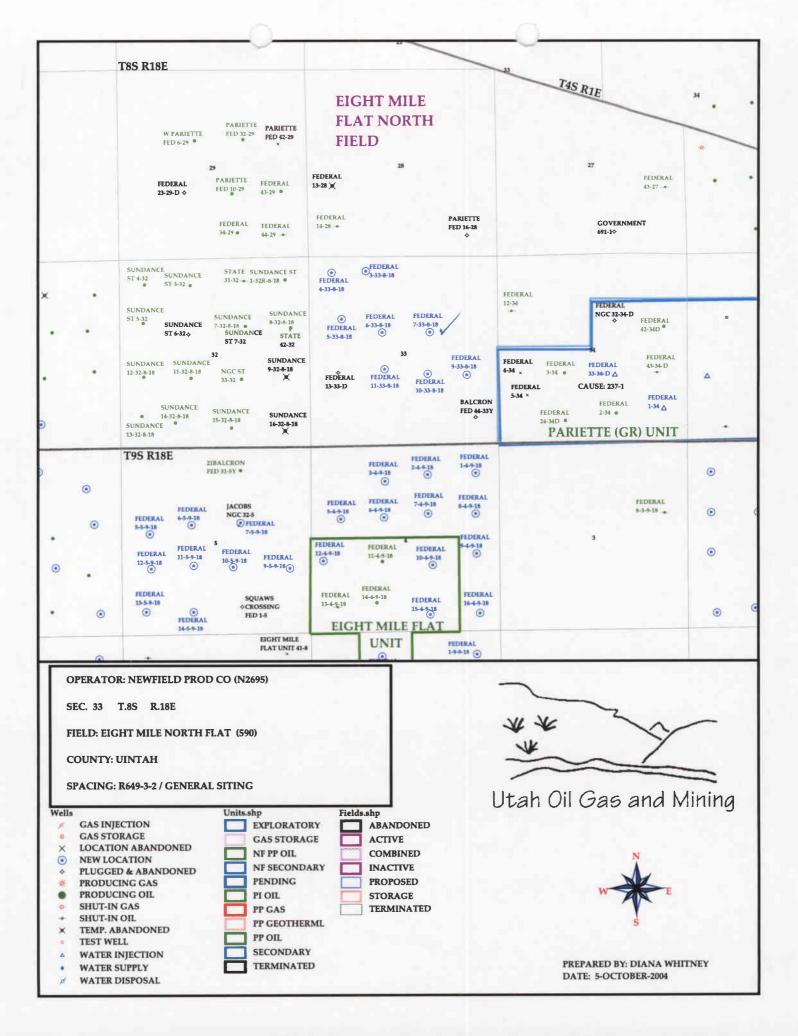



State of Utah

Department of Natural Resources

ROBERT L. MORGAN Executive Director

Division of Oil, Gas & Mining

LOWELL P. BRAXTON Division Director OLENE S. WALKER Governor

GAYLE F. McKEACHNIE Lieutenant Governor

October 6, 2004

Newfield Production Company Rt. #3, Box 3630 Myton, UT 84052

Re: <u>Federal 7-33-8-18 Well, 2145' FNL, 1912' FEL, SW NE, Sec. 33, T. 8 South,</u> <u>R. 18 East, Uintah County, Utah</u>

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann.§ 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-35975.

Sincerely,

John R. Baza Associate Director

pab Enclosures

cc: Uintah County Assessor Bureau of Land Management, Vernal District Office



1594 West North Temple, Suite 1210, PO Box 145801, Salt Lake City, UT 84114-5801 telephone (801) 538-5340 • facsimile (801) 359-3940 • TTY (801) 538-7458 • www.ogm.utah.gov

Operator:	Newfiel	Newfield Production Company				
Well Name & Number	Federal	7-33-8-18				
API Number:	43-047-					
Lease:	UTU-74					
Location: <u>SW NE</u>	Sec33_	T. <u>8 South</u>	R. <u>18 East</u>			

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

• Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338
- 3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

- 4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.
- 5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

10/11/2005	11:47	4356463031	INLAND	PAGE 04
FORM 3160-5 (June 1990)		DEPARTMEN BUREAU OF I.	ED STATES IT OF THE INTERIOR AND MANAGEMENT	FORM APPROVED Budget Bureau No. 1004.0135 Expiros: March 31, 1993 5. Lease Designation and Serial No.
	SUNDRY	NOTICES AND	REPORTS ON WELLS	UTU-74872
Do not use this fo	orm for prope Use	osals to drill or to deep APPLICATION F	pen or reentry a different reservoir. OR PERMIT -" for s⊔ch proposals	6. If Indian. Allottee or Tribe Name NA
	`	SUBMIT IN	TRIPLICATE	7. If Unit or CA, Agreement Designation SUNDANCE
1. Type of Well				8. Well Name and No.
	Gas Well	Other		FEDERAL 7-33-8-18
Well		L •		9. API Well No.
2. Name of Operator				43-047-35975
NEWFIEL	D PRODUC	TION COMPANY		10. Field and Prot. or Exploratory Area 8 MILE FLAT NORTH
3. Address and Telepho			46 2721	11. County or Parish, Slate
Rt. 3 Box 30	030, Myton	Utah, 84052 435-6	46-3 /21	
2145 FNL 1	912 FEL	SW/NE Section	n 33, T8S R18E	UINTAH COUNTY, UT.
12.	CHECK AP	PROPRIATE BOX(s)	TO INDICATE NATURE OF NOTICE, RE	PORT, OR OTHER DATA
TYPE	OF SUBN	ISSION	ТҮРЕ	OF ACTION
		of Inlant Jont Report hundonment Natice	Abandonment Recompletion Plugging Back Casing Repair Altering Casing X Other <u>Permit Extension</u>	Change of Plans New Construction Non-Routine Practuring Water Shut-Off Conversion to Injection Dispose Water (Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)
approval o	date was I	n Company requisi 0/6/04 (expiration een approved yet		well for one year. The original
				RECEIVED
		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Approved by the	OCT 1 1 2005
			Utah Division of the line of t	DIV. OF OIL, GAS & MINING
		Date	O 17 FEDI	
		By:	the Ch	10-20-05- CHO
14. Thereby certify the Signed	Mandie Cro	andie Cris	Title Regulatory Specialist	Date 10/11/2005
Approved by	erium or State of	lice use)	Title	Date
Conditions of ap CC; Ulah DOG	,			

The 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any deportment or agency of the United Stock any false. Influence

or findulent statements or representations as to any matter within its purchleron.

an an an an an an Andria. An an an an Andria

Application for Permit to Drill Request for Permit Extension Validation

(this form should accompany the Sundry Notice requesting permit extension)

 API:
 43-047-35975

 Well Name:
 Federal 7-33-8-18

 Location:
 SW/NE Section 33, T8S R18E

 Company Permit Issued to:
 Newfield Production Company

 Date Original Permit Issued:
 10/6/2004

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes $\square N \square \cap \square$

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes⊡No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes INO

Have there been any changes to the access route including ownership, or rightof-way, which could affect the proposed location? Yes I No 2

Has the approved source of water for drilling changed? Yes⊡No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes Dio

Is bonding still in place, which covers this proposed well? Yes INO

nche lingen

10/10/2005 Date

Title: Regulatory Specialist

Representing: Newfield Production Company

RECEIVED OCT 1 1 2005 DIV. OF OIL, GAS & MINING

OCT 0 1 2004 BLM VERNAL, UTAH

Form 3160-3 (September 2001)

FORM APPROVED OMB No. 1004-0136 Expires January 31, 2004

			Explices satisfield 51, 2004			
UNITED STATES DEPARTMENT OF THE IN		5. Lease Serial No.				
BUREAU OF LAND MANAG			UTU-74872			
APPLICATION FOR PERMIT TO DE		6. If Indian, Allottee or T	ribe Name			
APPEICATION FOR FERMIT TO DE			N/A			
la. Type of Work: I DRILL REENTER			7. If Unit or CA Agreement, Name and No.			
la. Type of Work: 🖾 DRILL 🖵 REENTER	C		N/A			
	🗵 Single Zone 🗖 Multi	1. 7	8. Lease Name and Well N			
1b. Type of Well: 🖾 Oil Well 🚨 Gas Well 🖵 Other	Single Zone 🖵 Multi	pie Zone	Federal 7-33-8-18			
2. Name of Operator			9. API Well No.	25972		
Newfield Production Company	3b. Phone No. (include area code)		10. Field and Pool, or Expl			
3a. Address	(435) 646-3721		10. Field and Fool, of Expl	Jaiory		
Route #3 Box 3630, Myton UT 84052	······································		11. Sec., T., R., M., or Blk.	and Survey or Area		
4. Location of Well (Report location clearly and in accordance with	any State requirements.)			. •		
At surface SW/NE 2145' FNL 1912' FEL			SW/NE Sec. 33, T	8S R18E		
At proposed prod. zone				13. State		
14. Distance in miles and direction from nearest town or post office*			12. County or Parish	UT		
Approximatley 22.3 miles south of Myton, Utah		1	Uintah	101		
 Distance from proposed* location to nearest 	16. No. of Acres in lease	17. Spacin	g Unit dedicated to this well			
property or lease line, ft.	677.36		40 Acres			
(Also to hearest difg. and hite, if ally)			A/BIA Bond No. on file			
 Distance from proposed location* to nearest well, drilling, completed, 	19. Proposed Depth	ZV. DEIVU	WEIA Bolid No. on me			
applied for, on this lease, ft. Approx. 1340	6500'		UTU0056			
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approximate date work will st	art*	23. Estimated duration			
4960.5' GL	1st Quarter 2005		Approximately seven (7) days from s	spud to rig release.		
	24. Attachments					
The following, completed in accordance with the requirements of Onsho	re Oil and Gas Order No.1, shall be a	ttached to thi	s form:			
			ns unless covered by an exis	sting hand on file (see		
1. Well plat certified by a registered surveyor.	Item 20 above).		is unless covered by an exis	ang bond on me (see		
 A Drilling Plan. A Surface Use Plan (if the location is on National Forest System 	Lands the 5. Operator certifi	cation.		1		
SUPO shall be filed with the appropriate Forest Service Office).	6. Such other site authorized offic		ormation and/or plans as m	ay be required by the		
			Dat			
25. Signature	Name (Printed/Typed)			930-04		

- Alla Fielda		1 / 00 0 /
Tipe / Production Gleph		
Approved Signature	Name (Printed/Typed)	12 116/2005
Title Againt FIGIO Manaue	Office	
Mineral Resources		

Application approval does not warrant or certify the the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.


Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

CONDITIONS OF APPROVAL ATTACHED

*(Instructions on reverse)



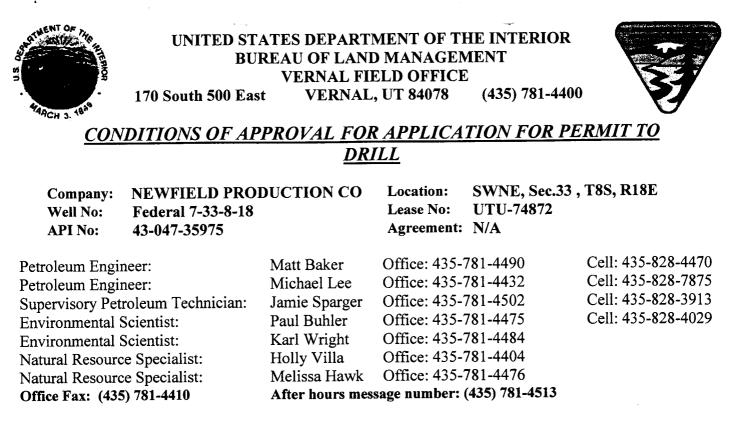

<u>A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR</u> FIELD REPRESENTATIVE TO INSURE COMPLIANCE

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations.

NOTIFICATION REQUIREMENTS

Location Construction (Notify Melissa Hawk ES / NRS)	-	Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Melissa Hawk ES / NRS)	-	Prior to moving on the drilling rig.
Spud Notice (Notify PE)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Jamie Sparger)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings.
BOP & Related Equipment Tests (Notify Jamie Sparger)	-	Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify PE)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

SURFACE USE PROGRAM CONDITIONS OF APPROVAL (COAs)

-This well is being approved in accordance with Washington Instruction Memorandum 2005-247 and Section 390 (Category 3) of the Energy Policy Act which establishes statutory categorical exclusions (CX) under the National Environmental Policy Act (NEPA). Category 3 states that an oil or gas well can be drilled within a developed field for which an approved land use plan or any environmental document prepared pursuant to NEPA analyzed drilling as a reasonably foreseeable activity, so long as such plan or document was approved within five (5) years prior to the date of spudding the well. This well is covered under the *Final Environmental Impact Statement and Record of Decision Castle Peak and Eightmile Flat Oil and Gas Exploration Project Newfield Rocky Mountains Inc.*, signed November 21, 2005. If the well has not been spudded by November 21, 2010, a new environmental document will have to be prepared prior to the approval of the APD.

-Due to the presence of Sclerocactus habitat in this area, a survey was conducted by Amanda Christensen (Plant and Wildlife Specialist) to determine if Sclerocactus are present. Since no cactus plants were found, the proposed well is clear from a T&E plant stand point.

-The construction of the access road and location shall be monitored by a certified paleontologist and a report of the findings provided to the Vernal Field Office of the Bureau of Land Management.

-4 to 6 inches of topsoil shall be stripped from the location and placed where it can most easily be accessed for interim reclamation. Once the well has been converted to water injection, the fill slopes shall be recontoured and the topsoil shall be spread over the entire well location. The well location shall then be seeded with crested wheatgrass (Variety Hycrest) at a 12 lb/acre rate (pure live seed). After seeded has been completed, an access road loop to the well head can be established. The reserve pit will be allowed to stay open until interim reclamation is completed so the entire area can be seeded at the same time. The interim seeding of the well location and reserve pit shall be done by either drilling the seed or by broadcasting the seed and dragging it with a spike tooth harrow.

-The pipeline trench shall be dug in the borrow ditch of the road and the trench material side cast into the existing vegetation. Both the water line and the gas line shall be buried in the same trench. When backfilling the trenches, care should be taken to disturb as little of the vegetation as possible and thus allowing the existing plants to reestablish on their own, however, these disturbed areas should also be seeded with crested wheatgrass at the 12 lb/acre rate to ensure vegetation establishment and to keep invasive weeds to a minimum. All seeding of the pipelines shall be completed using a seed drill.

-The temporary gas lines used during the temporary production phase shall be laid on the surface, and then removed once the well is turned to water injection.

-No pipeline construction will be allowed outside of already disturbed areas when soils are muddy and rutting of soils becomes apparent from the use of vehicles. If rutting occurs, operations must cease until soils are dry or frozen.

DOWNHOLE CONDITIONS OF APPROVAL

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

SITE SPECIFIC DOWNHOLE CONDITIONS OF APPROVAL

1. Casing cementing operations for production casing shall return cement to surface.

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- 1. There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well. Any changes in operation must have prior approval from the BLM, Vernal Field Office Petroleum Engineers.
- 2. The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.

3. <u>Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least</u> 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.

4. Blowout prevention equipment (BOPE) will remain in use until the well is completed or abandoned. Closing unit controls must remain unobstructed and readily accessible at all times. Choke manifolds must be located outside of the rig substructure.

All BOPE components will be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests must be performed by a test pump with a chart recorder and <u>NOT</u> by the rig pumps. Test must be reported in the driller's log.

BOP drills must be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.

Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.

No aggressive/fresh hard-banded drill pipe shall be used within casing.

5. All shows of fresh water and minerals will be reported and protected. A sample will be taken of any water flows and a water analysis furnished the BLM, Vernal Field Office. All oil and gas shows will be adequately tested for commercial possibilities, reported, and

protected.

- 6. No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the BLM, Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM, Vernal Field Office must be obtained and notification given before resumption of operations.
- 7. Chronologic drilling progress reports must be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.

Any change in the program must be approved by the BLM, Vernal Field Office. "Sundry Notices and Reports on Wells" (Form BLM 3160-5) must be filed for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Emergency approval may be obtained orally, but such approval does not waive the written report requirement. Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, will require the filing of a suitable plan pursuant to Onshore Oil & Gas Order No. 1 of 43 CFR 3164.1 and prior approval by the BLM, Vernal Field Office.

In accordance with 43 CFR 3162.4-3, this well must be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.

8. Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) will be submitted only when requested by the BLM, Vernal Field Office.

Please submit an electronic copy of all logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM. The cement bond log must be submitted in raster format (TIF, PDF other).

9. All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will

have prior written approval from the BLM, Vernal Field Office.

All measurement points shall be identified as point of sales or allocation for royalty determination prior to the installation of facilities.

- 10. Oil and gas meters will be calibrated in place prior to any deliveries. The Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the BLM, Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement.
- 11. A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM, Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- 12. This APD is approved subject to the requirement that, should the well be successfully completed for production, the BLM, Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - a. Operator name, address, and telephone number.
 - b. Well name and number.
 - c. Well location ($\frac{1}{4}$, Sec., Twn, Rng, and P.M.).
 - d. Date well was placed in a producing status (date of first production for which royalty will be paid).
 - e. The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - f. The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - g. Unit agreement and / or participating area name and number, if applicable.
 - h. Communitization agreement number, if applicable.
- 13. Any venting or flaring of gas will be done in accordance with Notice to Lessees (NTL)


4A and needs prior approval from Field Office Petroleum Engineers.

- 14. All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events as defined in NTL3A, will be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production
- 15. Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- 16. Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Com	pany:	NEWFI	ELD PRODUC	FION COM	PANY	<u> </u>
Well Name:		FEDER	AL 7-33-8-18			
Api No:	43-047-3597	5	Lease Type:	FEDER A	AL	
			<u>8E</u> County_			
Drilling Contr	actor	NDSI		RIG #	<u>NS#1</u>	
SPUDDED) :					
]	Date	02/23/06				
,	Time	3:30 PM				
	How	DRY				
Drilling will Commence:						
Reported by		TROY	<u> </u>			
Telephone #		1-435-823	-6013			
Date02	/24/2006	Signed	CHD			

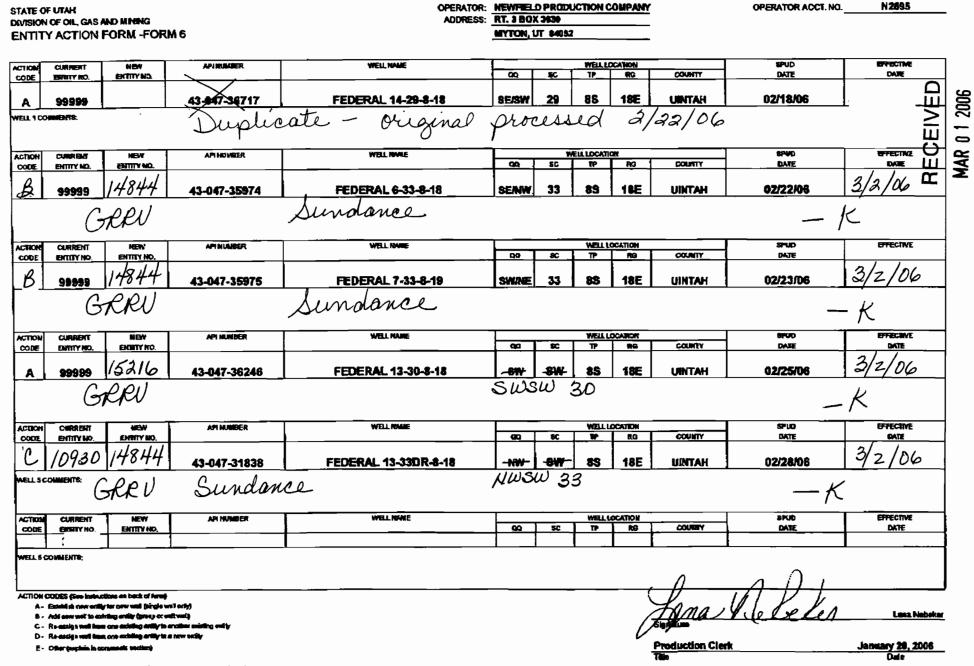

DIV. OF OIL, GAS & MINING

NOTE: Use CONMENT section is applies why each Aoles Case was selected.

INLAND

4356463831

1

14:

03/01/2006

PAGE

82

FORM 3160-5 (September 2001) D SUNDRY Do not use t abandoned w	FORM APPROVED OMB No. 1004-0135 Expires January 31,2004 5. Lease Serial No. UTU74872 6. If Indian, Allottee or Tribe Name.				
SUBMIT IN T 1. Type of Well C Oil Well Gas Well 2. Name of Operator NEWFIELD PRODUCTION CO 3a. Address Route 3 Box 3630 Myton, UT 84052 4. Location of Well (Footage, Sec 2145 FNL 1912 FEL SW/NE Section 33 T8S R1	c., T R., M., or Survey Descriptio	3b. Phone No. (include are 435.646.3721		SUNDANCE UN 8. Well Name and FEDERAL 7-33 9. API Well No. 4304735975	No. -8-18 I, or Exploratory Area e
12. CHECK	APPROPRIATE BOX(E	S) TO INIDICATE NA	TURE OF NO	OTICE, OR OT	HER DATA
under which the work will be perfor involved operations. If the operation Abandonment Notices shall be filed inspection i Formation water is produce Ashley, Monument Butte, J produced water is injected	or recomplete horizontally, give subsur- med or provide the Bond No. on file w n results in a multiple completion or re- conty after all requirements, including ed to a steel storage tank. I lonah, and Beluga water inji into approved Class II wells criteria, is disposed at Newf	Deepen Fracture Treat New Construction Plug & Abandon Plug & Abandon Plug Back its, including estimated starting d face locations and measured and t ith BLM/BIA. Required subsequence completion in a new interval, a F reclamation, have been completed if the production water n ection facilities by comp is to enhance Newfield's	Reclamati	te ily Abandon posal d work and approxima of all pertinent marke f filed within 30 days e filed once testing ha has determined that th guidelines, it is t ct trucks. Subse covery project. 7, T9S R19E) o	rs and zones. Attach the Bond following completion of the s been completed. Final e site is ready for final transported to the equently, the r at State of Utah
			Ut Oil, (cepted by ah Divisior Gas and M RECORD	n of lining

I hereby certify that the foregoing is true and correct	Title Regulatory Specialist					
Name (Printed Typed) Mandie Crozier						
Signature	Date					
I lanche rosses	04/24/20	006				
THIS SPACE FOI	R FEDERAL (OR STATE OFF	ICE USE			
Approved by		Title	Date			
Conditions of approval, if any, are attached. Approval of this notice does not wa certify that the applicant holds legal or equitable title to those rights in the subject which would entitle the applicant to conduct operations thereon.	Office					
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime States any false, fictitious and fraudulent statements or representations as to any	for any person knowir matter within its juri	ngly and willfully to make	to any department or agency of the United			
(Instructions on reverse)	•	a annan staar Baana S. W. Baana B	<i>,</i>			

FORM 3160-5 (September 2001)	UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT				FORM APPROVED OMB No. 1004-0135 Expires January 31.2004 5. Lease Serial No.		
SUNI Do not u abandone	DRY NOTICES AND REPO se this form for proposals to d well. Use Form 3160-3 (AP	RTS ON WELLS drill or to re-enter an 'D) for such proposals.		UTU74872 6. If Indian, Allott	ee or Tribe Name.		
1. Type of Well	NTRIPLICATE - Other Inst	ructions on reverse sid	le .	SUNDANCE UN	·		
Oil Well Gas Well Oil Well Gas Well Name of Operator NEWFIELD PRODUCTION				 Well Name and FEDERAL 7-33 API Well No. 			
3a. Address Route 3 Box 3630 3b. Phone No. (include are code) Myton, UT 84052 435.646.3721 4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 2145 FNL 1912 FEL SW/NE Section 33 T8S R18E					4304735975 10. Field and Pool, or Exploratory Area Monument Butte 11. County or Parish, State Uintah,UT		
12. CH	ECK APPROPRIATE BOX(E	S) TO INIDICATE NA	TURE OF NO	OTICE, OR OT	HER DATA		
TYPE OF SUBMISSION	N	ТҮРЕ	OF ACTION		<u></u>		
 Notice of Intent Subsequent Report Final Abandonment Notice 	 Acidize Alter Casing Casing Repair Change Plans Convert to Injector 	 Deepen Fracture Treat New Construction Plug & Abandon Plug Back 	Reclamation	te ly Abandon	Water Shut-Off Well Integrity Other Spud Notice		
proposal is to deepen direction under which the work will be involved operations. If the op Abandonment Notices shall b inspection.)	ted Operation (clearly state all pertinent det hally or recomplete horizontally, give subsu- performed or provide the Bond No. on file v eration results in a multiple completion or r e filed only after all requirements, including	rface locations and measured and t with BLM/BIA. Required subsequ ecompletion in a new interval, a F- reclamation, have been completed	rue vertical depths tent reports shall be orm 3160-4 shall be i, and the operator h	of all pertinent marke filed within 30 days filed once testing ha has determined that th	rs and zones. Attach the Bond following completion of the s been completed. Final e site is ready for final		

On 2/23/2006 MIRU NDSI NS # 1.Spud well @ 3:30 PM. Drill 310 of 12 1/4" hole with air mist. TH W/ 7 Jt's 8 5/8" J-55 24 # csgn. Set @ 315.99'/ KB On 2/25/2006 cement with 160 sks of class "G" w/ 2% CaCL2 + 1/4# sk Cello- Flake Mixed @ 15.8 ppg > 1.17 cf/ sk yeild. Returned 6 bbls cement to pit. WOC.

I hereby certify that the foregoing is true and correct Name (Printed/ Typed) Troy Zufelt	Title Drilling Foreman	g Foreman			
Signature Wat V. 24	Date 02/26/2006				
THIS SPAC	E FOR FEDERAL OR STATE OFFI	CEUSE			
Approved by	Title	Date			
Conditions of approval, if any, are attached. Approval of this notice d certify that the applicant holds legal or equitable title to those rights in which would entitle the applicant to conduct operations thereon.					
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make States any false, fictitious and fraudulent statements or representations		to any department or agency of the Linited			
(Instructions on reverse)		MAR 0 3 2006			

•

NEWFIELD PRODUCTION COMPANY - CASING & CEMENT REPORT

8 5/8 CASING SET AT 315.99

LAST CASING	8 5/8"	<u>set @</u>	315.99	OPERATOR		Newfiel
DATUM 1	2' KB			 WELL		Federal
DATUM TO CL	JT OFF CASI	NG		FIELD/PROSPEC	т	Monum
DATUM TO BR	ADENHEAD	FLANGE		CONTRACTOR &	RIG #	
TD DRILLER	310'	LOGGER				
HOLE SIZE	12 1/4					

OPERATOR	Newfield Production Company				
WELL	Federal 7-33-8-18				
FIELD/PROSPECT	Monument Butte				
CONTRACTOR & RIG #	NDSI NS # 1				

LOG OF CA	SING STRIN	G:	· · · ·						
PIECES	OD	ITEM -	MAKE - DESCF	RIPTION	WT / FT	GRD	THREAD	CONDT	LENGTH
		Shoe	Joint 40.60'						
		WHI - 92 cs	g head				8rd	A	0.95
7	8 5/8"	Maverick ST	-&C csg		24#	J-55	8rd	A	304.14
			GUIDE	shoe			8rđ	A	0.9
CASING INV	ENTORY B	λL.	FEET	JTS	TOTAL LEN	GTH OF,ST	RING		305.99
TOTAL LEN	GTH OF STF	RING	305.99	7	LESS CUT (OFF PIECE			2
LESS NON (CSG. ITEMS		1.85		PLUS DATU	IM TO T/CU	T OFF CSG		12
PLUS FULL	JTS. LEFT C	UT	0		CASING SE	T DEPTH			315.99
	TOTAL		304.14	77	1				
TOTAL CSG	. DEL. (W/O	THRDS)	304.14	7	∫ COMPARE				
TIMING			1ST STAGE						
BEGIN RUN	CSG.	Spud	2/23/2006	3:30 PM	GOOD CIRC	C THRU JOI	В	YES	
CSG. IN HO	LE		2/24/2006	2:30 PM	Bbls CMT C	IRC TO SU	RFACE	6	
BEGIN CIRC	;		2/25/2006	10:13 AM	RECIPROC	ATED PIPE	FOR	<u>N</u> /A	
BEGIN PUM	РСМТ		2/25/2006	10:28 AM	4		-		
BEGIN DSPI	L. CMT		2/25/2006	10:40 AM	BUMPED PI		700		PSI
PLUG DOW	N	r	2/25/2006	10:46 AM					
CEMENT US	SED			CEMENT CO	MPANY-	B. J.			<u></u>
STAGE	# SX			CEMENT TYP	PE & ADDITIN	/ES			
1	160	Class "G" w	/ 2% CaCL2 + 1	/4#/sk Cello-F	lake mixed @) 15.8 ppg 1	.17 cf/sk yield	l	
CENTRALIZ						SHOW MA	KE & SPACIN	IG	
Centralizer	s - Middle fi	rst, top seco	ond & third for	3					

COMPANY REPRESENTATIVE Troy Zufeit DATE 2/25/2006

·

Image: September 2001 Image: United states Image: September 2001 Image: Department of the interior Image					ORM APPROVED MB No. 1004-0135 pires January 31,2004	
Do not us	RY NOTICES AND REPOR e this form for proposals to well. Use Form 3160-3 (AP	drill or to re-enter an	·	UTU74872 6. If Indian, Allottee or Tribe Name.		
SUBMIT IN 1. Type of Well	TRIPLICATE - Other Inst	ructions on reverse si	de	7. If Unit or CA/Agreement, Name and/or No. SUNDANCE UNIT		
🗙 Oil Well 🔲 Gas Well	Other	<u> </u>		8. Well Name and		
2. Name of Operator NEWFIELD PRODUCTION	COMPANY			FEDERAL 7-33	-0-18	
3a. Address Route 3 Box 3630 3b. Phone No. (include are Myton, UT 84052 435.646.3721			code)	9. API Well No. 4304735975 10. Field and Pool, or Exploratory Area		
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 2145 FNL 1912 FEL					Monument Butte 11. County or Parish, State	
SW/NE Section 33 T8S	R18E			Uintah,UT		
12. CHE	CK APPROPRIATE BOX(E	S) TO INIDICATE NA	TURE OF NO	OTICE, OR OT	HER DATA	
TYPE OF SUBMISSION		TYP	E OF ACTION		······································	
Notice of Intent	Acidize Alter Casing	Deepen Fracture Treat	Reclamati		Water Shut-Off	
X Subsequent Report	Casing Repair	New Construction	Recomple		Weekly Status Report	
Final Abandonment Notic		 Plug & Abandon Plug Back 	Water Dis			
proposal is to deepen directiona under which the work will be p involved operations. If the ope Abandonment Notices shall be inspection.)	d Operation (clearly state all pertinent detr lly or recomplete horizontally, give subsur erformed or provide the Bond No. on file v ration results in a multiple completion or n filed only after all requirements, including	rface locations and measured and with BLM/BIA. Required subset ecompletion in a new interval, a reclamation, have been complet	i true vertical depins juent reports shall b Form 3160-4 shall b ed, and the operator	of all pertinent marks e filed within 30 days e filed once testing ha has determined that th	following completion of the solven completed. Final se site is ready for final	
8 625 csan to 1 500 psi	n Rig # 14. Set all equipment. Vernal BLM field, & Rooseve a 7.875 hole with fresh water	It DOGM office was no	tifed of test. P	J BHA and tag	cement @ 275. Drill	

out cement & shoe. Drill a 7.875 hole with fresh water to a depth of 6175'. Lay down drill string & BHA. Open hole log w/ Dig/SP/GR log's TD to surface. PU & TIH with Guide shoe, shoe jt, float collar, 145 jt's of 5.5 J-55, 15.5# csgn. Set @ 6150.44/ KB. Cement with 375sks cement mixed @ 11.0 ppg & 3.43 yld. The 475 sks cement mixed @ 14.4 ppg & 1.24 yld. Returned 10bbls of Spacers to reserve pit. Nipple down Bop's. Drop slips @ 100,000 #'s tension. Release rig @ 7:30am 3/28/06.

I hereby certify that the foregoing is true and correct	Title				
Name (Printed/ Typed) Don Bastian					
Signature Don Bastian	Date 03/28/2006				
THIS SPACE FOR FI	EDERAL OR STATE	OFFICE USE			
Approved by	Title	Date			
Conditions of approval, if any, are attached. Approval of this notice does not warrant certify that the applicant holds legal or equitable title to those rights in the subject leas which would entitle the applicant to conduct operations thereon.	se Office	Office			
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for an States any false, fictitious and fraudulent statements or representations as to any matter	y person knowingly and willful er within its jurisdiction	ly to make to any department or agency of the United			

NEWFIELD PRODUCTION COMPANY - CASING & CEMENT REPORT

_____ 5 1/2" CASING SET AT _____ 6150.44

	Fit clir @ 6109.14
LAST CASING 8 5/8" SET A 315.99	OPERATOR Newfield Production Company
DATUM 12' KB	WELL Federal 7-33-8-18
DATUM TO CUT OFF CASING 12'	FIELD/PROSPECT Monument Butte
DATUM TO BRADENHEAD FLANGE	CONTRACTOR & RIG # Union # 14
HOLE SIZE 7 7/8"	•

PIECES	OD	ITEM - MAKE - DESCRIPTION			WT/FT	GRD	THREAD	CONDT	LENGTH
		Landing Jt							14
		5.95 short j	t @ 4337'						
144	5 1/2"	ETC LT & C	casing		15.5#	J-55	8rd	A	6094.54
		Float collar							0.6
1	5 1/2"	ETC LT&C	sg		15.5#	J-55	8rd	A	42.65
			GUIDE	shoe			8rd	A	0.65
CASING IN	/ENTORY B/	AL	FEET	JTS	TOTAL LEN	GTH OF ST	ring	ļ	6152.44
TOTAL LEN	GTH OF STR	RING	6152.44	145	LESS CUT	OFF PIECE			14
LESS NON	CSG. ITEMS		15.25		PLUS DATU	IM TO T/CL	IT OFF CSG	ļ	12
PLUS FULL	JTS. LEFT C	DUT	127.66	3	CASING SE	T DEPTH			6150.44
	TOTAL		6264.85	148	h				
TOTAL CSC	. DEL. (W/O	THRDS)	6264.85	148	∫ сомрая	RE			
TIMING			1ST STAGE	2nd STAGE					
BEGIN RUN	I CSG.		9:00 PM	3/27/2006	GOOD CIRC THRU JOB Yes				
CSG. IN HC	LE		12:00AM	3/28/2006	Bbls CMT C	IRC TO SU	RFACE	10 Spacer	
BEGIN CIR	0		12:30 AM	3/28/2006	RECIPROC	ATED PIPE	FOR	THRUSTRON	<u>(E_</u> No
BEGIN PUN	IP CMT		2:48AM	3/28/2006	DID BACK F	PRES. VAL	VE HOLD ?	Yes	
BEGIN DSF	L. CMT		3:41AM	3/28/2006	BUMPED P			2388	PSI
PLUG DOW	/N	-	4:09Am	3/28/2006					
CEMENT U	SED			CEMENT CO	MPANY-	B. J.			
STAGE	# SX			CEMENT TY	PE & ADDITI	VES			
1	375	Premiite II v	// 10% gel + 3	% KCL, 3#'s /s	k CSE + 2# s	sk/kolseal +	1/4#'s/sk Cel	lo Flake	
		mixed @ 11	.0 ppg W / 3.43	3 cf/sk yield					
2	475	50/50 poz V	V/ 2% Gel + 3%	KCL, .5%EC	1,1/4# sk C.F	. 2% gel. 3%	6 SM mixed (@ 14.4 ppg W/	1.24 YLD
CENTRALI	ZER & SCRA	TCHER PLA	CEMENT			SHOW MA	KE & SPACI	NG	,
Centralizers - Middle first, top second & third. Then every third collar for a total of 20.									

COMPANY REPRESENTATIVE Don Bastian DATE 3/28/2006

	UNITED STATES DEPARTMENT OF THE INTERIC BUREAU OF LAND MANAGEMEN	5	OI	ORM APPROVED MB No. 1004-0135 pires January 31,2004	
SUNDRY	NOTICES AND REPORTS O	NWELLS	د _ا	UTU74872	9.
Do not use t abandoned w	his form for proposals to drill or ell. Use Form 3160-3 (APD) for s	to re-enter an such proposals.	6	. If Indian, Allott	ee or Tribe Name.
SUBMIT IN T	RIPLICATE - Other Instruction	is on reverse side	7	. If Unit or CA/A	greement, Name and/or No.
				SUNDANCE UN	чт
1. Type of Well	Other		8	. Well Name and	No.
2. Name of Operator				FEDERAL 7-33	-8-18
NEWFIELD PRODUCTION CO 3a. Address Route 3 Box 3630		ne No. (include are code)		. API Well No. 4304735975	
Myton, UT 84052	435.640		1	0. Field and Pool	, or Exploratory Area
	c., T., R., M., or Survey Description)		L 1	Monument Butte 1. County or Pari	
2145 FNL 1912 FEL SW/NE Section 33 T8S R1	8E		1	•	sh, State
				Uintah,UT	
12. CHECK	X APPROPRIATE BOX(ES) TO I			FICE, OR OT	HER DATA
TYPE OF SUBMISSION		TYPE OF	ACTION		
X Notice of Intent		epen 🖸	`	Start/Resume)	Water Shut-Off
		w Construction	Reclamation Recomplete		Well Integrity
Subsequent Report		ig & Abandon	Temporarily		Variance
Final Abandonment Notice		ng Back	Water Dispo	osal	
inspection.) Newfield Production Comp tanks to be equipped with E formation, which are relativ separator to maximize gas Newfield is requesting a va a surge of gas when the thi as well as risk a fire hazard	riance for safety reasons. Crude o ief hatches are open. While gaugin I, under optimum conditions	Onshore Order 43 Cf es. Newfield operates The majority of the v il production tanks ed	FR Part 316 s wells that vells are ec quipped wit	60 Section 4 m produce from quipped with a th back pressu	equiring production the Green River three phase ure devices will emit
	Accepted by the Utah Division of Oil, Gas and Minute J	.	Approval	f This	
	Utah Divisionan	Federal	Approval O In Is Necess	sary	
	Oil, Gas and Manney	Auto			1. The second
Da ¹ By	$10; \frac{1122120}{21122}$: 	201730558407 212/06 251
I hereby certify that the foregoing is	s true and correct	Title			the second part of the second pa
Name (Printedi Typed) Mandie Crozier	1	Regulatory Specialist			
Signature Andia	LADIA	Date 04/24/2006			
	THIS SPACE FOR FED	ERAL OR STATE	OFFICE	USE	
		Tial		Date	
Approved by Conditions of approval, if any, are attach	ed Approval of this notice does not warrant or	Title			·
certify that the applicant holds legal or ec which would entitle the applicant to conc	quitable title to those rights in the subject lease	Office			
Title 18 U.S.C. Section 1001 and Title 43	3 U.S.C. Section 1212, make it a crime for any postatements or representations as to any matter w	erson knowingly and	CEN	department or age	ncy of the United
States any false, fictuous and traudulent (Instructions on reverse)	statements of representations as to any matter w	initial its jurisdiction	R 2 3 23		

DIV. OF OIL, GAS & MINING

FORM 3160-5 (September 2001) UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill or to re-enter an					FORM APPROVED OMB No. 1004-0135 Expires January 31,2004 5. Lease Serial No. UTU74872 6. If Indian, Allottee or Tribe Name.		
	vell. Use Form 3160-3 (A RIPLICATE > Other Th Other		s. Qe 7 7	7. If Unit or CA/A SUNDANCE UN 3. Well Name and FEDERAL 7-33-	greement, Name and/or No. NIT No.		
3a. Address Route 3 Box 3630 Myton, UT 84052 4. Location of Well <i>(Footage, Se</i> 2145 FNL 1912 FEL SW/NE Section 33 T8S R	3b. Phone No. (include are 435.646.3721 tion)	e code) [1 1	 9. API Well No. 4304735975 10. Field and Pool, or Exploratory Area Monument Butte 11. County or Parish, State Uintah,UT 				
12. CHEC	K APPROPRIATE BOX(TURE OF NOT	FICE, OR OT	HER DATA		
 Notice of Intent Subsequent Report Final Abandonment Notice 	 Acidize Alter Casing Casing Repair Change Plans Convert to Injector 	 Deepen Fracture Treat New Construction Plug & Abandon Plug Back 		Abandon	 Water Shut-Off Well Integrity Other Weekly Status Report		
under which the work will be perfo involved operations. If the operation	peration (clearly state all pertinent d or recomplete horizontally, give subs rmed or provide the Bond No. on file on results in a multiple completion or d only after all requirements, includir	urface locations and measured and with BLM/BIA. Required subsect recompletion in a new interval, a	true vertical depths of uent reports shall be fi Form 3160-4 shall be fi	all pertinent marker iled within 30 days f iled once testing has	rs and zones. Attach the Bond following completion of the s been completed. Final		

Status report for time period 04/11/06 - 04/21/06

Subject well had completion procedures intiated in the Green River formation on 04-11-06 without the use of a service rig over the well. A cement bond log was run and a total of one Green River intervals were perforated and hydraulically fracture treated with 20/40 mesh sand. Perforated intervals are as follows: Stage #1 (5873'-5880'),(5827'-5843'),(5792'-5802'),(5740'-5744'). All perforations, were 4 JSPF. Composite flow-through frac plugs were used between stages. Fracs were flowed back through chokes. A service rig was moved over the well on 04-19-2006. Bridge plugs were drilled out and well was cleaned to 6082'. Zones were swab tested for sand cleanup. A new 1 1/2" bore rod pump was run in well on sucker rods. Well was placed on production via rod pump on 04-21-2006.

I hereby certify that the foregoing is true and correct	Title				
Name (Printed/Typed) Lana Nebeker	Production	n Clerk			
Signature Alan Ale Ster	Date 05/15/2006				
THE REPORT OF A DESCRIPTION OF A DESCRIP) spectrum (é)(&\$11 VII 956)			
Approved by		Title		Date	
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office			
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any p States any false, fictitious and fraudulent statements or representations as to any matter w	erson knowing vithin its jurisd	gly and willfully to r liction	nake to any department	The United	
(Instructions on reverse)			MAY 1 6	5 2006	

FORM 3160-4 (July 1992)	DEPAF	UNITED RTMENT O	STATES F THE INTE		SUBMIT IN DUP (See oth struction reverse	ner in- ns ons	OMB NO. 1 Expires: Fet	004-01 oruary 2	37
	BURE	EAU OF LAN	D MANAGEM	ENT	,				-74872
WELL CON	IPLETION	OR RECO	MPLETION	REPORT A	AND LOG	*	6. IF INDIAN, A		E OR TRIBE NAME NA
1a. TYPE OF WORK	OIL	GAS	; []				7. UNIT AGREE		
1b. TYPE OF WELL	WELL		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Other				Sunda	ince Unit
							8. FARM OR LE	ASE NAN	IE. WELL NO.
NEW X WORK		PLU BAC		Other			F	ederal	7-33-8-18
2. NAME OF OPERATOR				· · ·			9. WELL NO.		7.05075
3. ADDRESS AND TELEPHONE N	Э.		ation Compan				10. FIELD AND F	-	7-35975 WILDCAT
4. LOCATION OF WELL (Rep.			00 Denver, CO		·				Mile Flat
At Surface			EL (SW/NE) Sec.				OR AREA	1., OK BL	OCK AND SURVEY
At top prod. Interval reported be	low					ļ	Se	c. 33,	T8S, R18E
At total depth		14. API N	0.	DATE ISSUED)		2. COUNTY OR	PARISH	13. STATE
			3-047-35975		10/6/04		Uinta	ah	UT
15. DATE SPUDDED 16. DAT 2/23/06	e t.d. reached 3/27/06		L. (Ready to prod.) 1/21/06		df. rkb. rt. gr. e 1' GL		4971' KB		19. ELEV. CASINGHEAD
20. TOTAL DEPTH. MD & TVD	21. PLUG BAG	CK T.D., MD & TVD	22. IF MULTIP HOW MAN	LE COMPL	23. INTERVALS DRILLED BY	ROTA	RY TOOLS		CABLE TOOLS
6175'		6107'	HOW MAN	1-	>		х		
24. PRODUCING INTERVAL(S), OF	THIS COMPLETION-								25. WAS DIRECTIONAL SURVEY MADE
		Green	River 5740)'-5880'					No
26: Type electric and other 1 Dual Induction Guard	OGS RUN	neated Dana	ity Componen	tod Noutron		Como	nt Rond L	20	27. WAS WELL CORED NO
23.	I, SF, Compe		SING RECORD (Rep			, cenie		Jy	INU
CASING SIZE/GRADE 8-5/8" - J-55	WEIGHT.		2011 SET (MD)	HOLE SIZE 12-1/4"			IENTING RECOR		AMOUNT PULLED
5-1/2" - J-55	15.		6150'	7-7/8"			475 sx 50/5		
20									
29. SIZE	TOP (MD)	ER RECORD BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	30. SIZE	D	UBING RECO EPTH SET (MD)	D ND	PACKER SET (MD)
					2-7/8"		EOT @ 5942'		TA @ 5813'
31. PERFORATION RECORD (Int	rval, size and number)	•		32.	ACID, SHOT	, FRACTU	RE, CEMENT	SQUEE	
<u>INTERVAI</u> (CP.5,1,2,&3) 5740 '-4		SIZE	SPF/NUMBEF	E DEPTH INTI	ERVAL (MD)	A	MOUNT AND K	IND OF I	MATERIAL USED
	7'-43', 5 873'-80'	.46"	4/148	5740'-	-5880'	Frac w/	181,461# 20)/40 sa	nd in 1276 bbls fluid
	·								
			-						
···									
						l			
33.*			PRODU	 CTION					
DATE FIRST PRODUCTION	PRODUCTION		as lift, pumpingsize and	type of pump)			N N		VIUS (Producing or shut-in)
4/21/06	HOURS ILSTED	CHOKE SIZE			GAS-MCL	WATER-	-BBL.		GAS-OIE RATIO
30 day ave			TEST PERIOD	33	10	1	29		303
HOW, FUBING PRESS.	CASING PRESSURE	CALCULATED 2 ETIOL R. R. M.	OH-BBL.	GASMCF.	L	WATERE		GRAVIT	Y-API(CORR.)
		24-HOUR RA H							
34 DINPONITION OF GAS (Sold, used	for fuel, vented, etc.)	Sold & Lloss	d for Eucl		F	RECE	IVED	EBY	
35. LIST OF ATTACHMENTS		Sold & Used				L,			
							3 2006		
36, Enerchy certify that the tobar	isg and attgched in Marke 	mation is complete	and correct is determ.	ined from est of pillel in Electronic	eneonds DIV. C	of oil, g	AS & MININ	G	

Ċ

тор	воттом	DESCRIPTION, CONTENTS, ETC.	T T		<u>-</u>
			NAME	TOP	
			DAME	MEAS. DEPTH	FRUE VERT. DEP
		Well Name	Garden Gulch Mkr	<u>3946'</u>	VENIDEF
		Federal 7-33-8-18	Garden Gulch 1	4149'	
			Garden Gulch 2	4264'	
			Point 3 Mkr	4531'	
			X Mkr	4740'	
			Y-Mkr	4772'	
			Douglas Creek Mkr	4906'	
			BiCarbonate Mkr	5164'	
			B Limestone Mkr Castle Peak	683 01	
			Basal Carbonate	5720' 6126'	
			Total Depth (LOGGERS	6180'	
				0100	
1	1 1		1		

•.	DEPARTMENT OF NATUR DIVISION OF OIL, GAS			5. LEASE DESIGNATION AND SERIAL NUMBER USA UTU-74872
SUNDRY	(NOTICES AND R)	EPORTS ON V	VELLS	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
Do not use this form for proposals to dr wells, or to drill horizont	ill new wells, significantly deepen existing al laterals. Use APPLICATION FOR PER	wells below current bottom-he MIT TO DRILL form for such	le depth, reenter plugg proposals.	ed 7. UNIT OF CA AGREEMENT NAME: SUNDANCE UNIT
TYPE OF WELL: OIL WELL				8. WELL NAME and NUMBER: FEDERAL 7-33-8-18
NAME OF OPERATOR:				9. API NUMBER:
NEWFIELD PRODUCTION CON	IPANY	T		4304735975
ADDRESS OF OPERATOR:			HONE NUMBER	10. FIELD AND POOL, OR WILDCAT:
Route 3 Box 3630	CITY Myton STATE U	T ZIP 84052	435.646.3721	MONUMENT BUTTE
				COUNTY: UINTAH
FOOTAGES AT SURFACE: 2145 FNL OTR/OTR. SECTION. TOWNSHIP. RANGE	MERIDIAN: SWNE, 33, T8S, R18E			state: UT
OTR/OTR. SECTION. TOWNSHIP. RANGE	MERIDIAN: SWNE, 33, T8S, R18E			STATE: UT
OTR/OTR SECTION. TOWNSHIP. RANGE	MERIDIAN: SWNE, 33, T8S, R18E	TYI	F NOTICE, RE E OF ACTION	EPORT, OR OTHER DATA
OTRIOTE SECTION. TOWNSHIP. RANGE CHECK APPRO TYPE OF SUBMISSION	MERIDIAN: SWNE, 33, T8S, R18E		E OF ACTION	EPORT, OR OTHER DATA
OTR/OTR. SECTION. TOWNSHIP. RANGE 1. CHECK APPRO TYPE OF SUBMISSION ONTICE OF INTENT (Submit in Duplicate)	MERIDIAN: SWNE, 33, T8S, R18E PRIATE BOXES TO INDI ACIDIZE ALTER CASING	TYI	E OF ACTION	EPORT, OR OTHER DATA
OTRIOTE SECTION. TOWNSHIP. RANGE CHECK APPRO TYPE OF SUBMISSION	MERIDIAN: SWNE, 33, T8S, R18E PRIATE BOXES TO INDI ACIDIZE ALTER CASING CASING REPAIR	TYI	E OF ACTION	EPORT, OR OTHER DATA REPERFORATE CURRENT FORMATION SIDETRACK TO REPAIR WELL TEMPORARITLY ABANDON
OTR/OTR. SECTION. TOWNSHIP. RANGE 1. CHECK APPRO TYPE OF SUBMISSION ONTICE OF INTENT (Submit in Duplicate)	MERIDIAN: SWNE, 33, T8S, R18E PRIATE BOXES TO INDI ACIDIZE ALTER CASING CASING REPAIR CHANGE TO PREVIOUS PLANS	TYI DEEPEN FRACTURE TH NEW CONSTR OPERATOR CH	E OF ACTION eat jction ange	EPORT, OR OTHER DATA REPERFORATE CURRENT FORMATION SIDETRACK TO REPAIR WELL TEMPORARITLY ABANDON TUBING REPAIR
OTR/OTR. SECTION. TOWNSHIP. RANGE 1. CHECK APPRO TYPE OF SUBMISSION NOTICE OF INTENT (Submit in Duplicate) Approximate date work will	MERIDIAN: SWNE, 33, T8S, R18E PRIATE BOXES TO INDI ACIDIZE ALTER CASING CASING REPAIR CHANGE TO PREVIOUS PLANS CHANGE TUBING	TYI DEEPEN FRACTURE TH REW CONSTR OPERATOR CH PLUG AND AN	E OF ACTION eat jction ange	EPORT, OR OTHER DATA REPERFORATE CURRENT FORMATION SIDETRACK TO REPAIR WELL TEMPORARITLY ABANDON TUBING REPAIR VENT OR FLAIR
OTR/OTR. SECTION. TOWNSHIP. RANGE CHECK APPRO TYPE OF SUBMISSION NOTICE OF INTENT (Submit in Duplicate) Approximate date work will	MERIDIAN: SWNE, 33, T8S, R18E PRIATE BOXES TO INDI ACIDIZE ALTER CASING CASING REPAIR CHANGE TO PREVIOUS PLANS CHANGE TUBING CHANGE WELL NAME	TYI DEEPEN FRACTURE TH NEW CONSTR OPERATOR CH PLUG AND AH PLUG BACK	E OF ACTION eat jction ange andon	EPORT, OR OTHER DATA REPERFORATE CURRENT FORMATION SIDETRACK TO REPAIR WELL TEMPORARITLY ABANDON TUBING REPAIR VENT OR FLAIR WATER DISPOSAL
OTR/OTR. SECTION. TOWNSHIP. RANGE 1. CHECK APPRO TYPE OF SUBMISSION Image: Submit in Duplicate Approximate date work will Image: SUBSEOUENT REPORT (Submit Original Form Only)	MERIDIAN: SWNE, 33, T8S, R18E PRIATE BOXES TO INDI ACIDIZE ALTER CASING CASING REPAIR CHANGE TO PREVIOUS PLANS CHANGE TUBING CHANGE WELL NAME CHANGE WELL STATUS	TYI DEEPEN FRACTURE TF REW CONSTR OPERATOR CH PLUG AND AN PLUG BACK PRODUCTION	E OF ACTION eat jction ange andon (start/stop)	EPORT, OR OTHER DATA REPERFORATE CURRENT FORMATION SIDETRACK TO REPAIR WELL TEMPORARITLY ABANDON TUBING REPAIR VENT OR FLAIR WATER DISPOSAL WATER SHUT-OFF
OTR/OTR. SECTION. TOWNSHIP. RANGE 1. CHECK APPRO TYPE OF SUBMISSION Image: Display the section of	MERIDIAN: SWNE, 33, T8S, R18E PRIATE BOXES TO INDI ACIDIZE ALTER CASING CASING REPAIR CHANGE TO PREVIOUS PLANS CHANGE TUBING CHANGE WELL NAME	TYI DEEPEN FRACTURE TF REW CONSTR OPERATOR CH PLUG AND AN PLUG BACK PRODUCTION	E OF ACTION eat jction ange andon	EPORT, OR OTHER DATA REPERFORATE CURRENT FORMATION SIDETRACK TO REPAIR WELL TEMPORARITLY ABANDON TUBING REPAIR VENT OR FLAIR WATER DISPOSAL

added in the Green River as follows: D2 4977'-4985', 4988'-4992', 4996'-5002'.

÷

NAME (PLEASE PRINT) Jentri Park	TITLE Production Tech
SIGNATURE	DATE08/15/2008
(This space for State use only)	RECEIVED
	AUG 1 8 2008
	DIV. OF OIL, GAS & MINING

Daily Activity Report

Format For Sundry FEDERAL 7-33-8-18 5/1/2008 To 9/30/2008

7/19/2008 Day: 1

NC #2 on 7/18/2008 - MIRU NC #2. Hot oiler had pumped 60 BW down csq @ 250°. RD pumping unit. Soft seat rods & pump. Pressure test tbg to 3000 psi. Unseat rod pump. Flush tbg & rods w/ 40 BW @ 250°. TOH w/ rods as detailed below. LD 124-3/4" plain rods due to planned changes in rod string. Flush tbg & rods w/ additional 20 BW & 250° during TOH. SDFN.

7/22/2008 Dav: 2

NC #2 on 7/21/2008 - X-over for tbg. ND wellhead. Release TA. NU BOPs. RU rig floor. PU tbg & tag fill @ 6082' (no new fill). LD tbg used to tag. TOH w/ tbg as follows: 188- jts 2 7/8" J-55 6.5# tbg, TA, 2- jts 2 7/8" J-55 tbg, SN, 2- jts 2 7/8" J-55 tbg, 2 7/8" notched collar. Flush tbg w/ 20 BW @ 250° during TOH. RU Perforators LLC. RIH w/ 4.75" gauge ring to 5150', POH w/ gauge ring, RIH w/ Weatherford 5 1/2" HE RBP & set @ 5100'. Fill csg & pressure test RBP to 2000 psi. RIH w/ perf gun. Perf gun would not fire. POH w/ perf gun & re-wire on surface. RIH w/ perf gun. Perforate D2 sands from 5006-15', 4996-5002', 4988-92', 4977-85' w/ 3 1/8" slick guns (19 gram, .49" HE, 120°, 21.92" pen, EXP-3319-331 Titan) w/ 4 spf for total of 108 holes. POH w/ wireline & RD Perforators. RU hot oiler. Fill csg & brake down D2 sands @ 1900 psi, establish injection rate of 1 bpm @ 1550 psi. RD hot oiler. SDFN.

7/23/2008 Day: 3

NC #2 on 7/22/2008 - RU BJ services. 19 psi on well. Frac D2 sds down csg w/ 75,737#'s of 20/40 sand in 671 bbls of Lightning 17 fluid. Broke @ 2902 psi. Pumped 780 gals of fresh wtr mixed with 30 gals of Techni-Hib 767W. Treated w/ ave pressure of 1556 psi @ ave rate of 23.5 BPM. ISIP 1830 psi. Flow well back @ 3 BPM starting w/ 28/64 choke. Flow well back until dead. Recovered 310 BW. TIH w/ RH on 2 7/8" J-55 tbg. Tag fill @ 5085'. PUH to 4940'. RU swab equipment. Made 9 swab runs w/ SFL @ surface & EFL @ 1200'. Recovered total of 81 bbls fluid w/ trace of oil, show of gas & good show of sand. SDFN.

7/24/2008 Day: 4

NC #2 on 7/23/2008 - Made 11 swab runs w/ SFL @ 300' & EFL @ 1800'. Recovered 100 bbls fluid ending w/ 5% oil cut, good show of gas & no sand. RD swab equipment. TIH & tag fill @ 5085'. Clean out to RBP @ 5100' & circulate well clean. Attempt to release HE RBP w/o success. Get off of RBP & PUH to 5070'. RU swab equipment. Made 8 swab runs w/ SFL @ surface & EFL @ 1600'. TIH & latch onto HE RBP. Attempt to release HE RBP w/o success. Get off of RBP & PUH to 5070'. Made 8 swab runs w/ SFL @ 1400' & EFL @ 2300'. TIH & latch onto HE RBP. Release HE RBP. TOH w/ tbg & LD HE RBP. TIH tbg as follows: 2 7/8" NC, 2- jts 2 7/8" J-55 6.5# tbg, SN, 2- jts 2 7/8" J-55 tbg, TA, 40- jts 2 7/8" tbg. SDFN.

7/25/2008 Day: 5

NC #2 on 7/24/2008 - Continue to TIH w/ tbg as follows: 2 7/8" NC, 2- its 2 7/8" J-

Recompletion

Recompletion

Recompletion

Recompletion

Recompletion

w/ 16000# tension. RD rig floor. ND BOPs. NU wellhead. Flush tbg w/ 60 BW. Xover for rods. PU & prime new CDI 2 1/2" X 1 3/4" X 16' X 20' RHAC rod pump. TIH w/ rods as follows: 6- 1 1/2" weight rods, 124- 3/4" guided rods, 100- 7/8" guided rods, 1- 8',6',2' X 7/8" pony rods & 1 1/2" X 26' polished rod. RU pumping unit. Fill tbg w/ 10 BW & test to 200 psi. Stroke test pump w/ unit to 800 psi, good pump action. RD pump & pump lines. RDMOSU. PWOP @ 2:00 PM w/ 86" SL & 4 1/2 SPM. Final Report!

-

Pertinent Files: Go to File List

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY



REGION 8 1595 WYNKOOP STREET DENVER, CO 80202-1129 http://www.epa.gov/region8

APR 2 1 2009

Ref: 8P-W-GW

<u>CERTIFIED MAIL</u> <u>RETURN RECEIPT REQUESTED</u>

Eric Sundberg Newfield Production Company 1001 Seventeenth Street, Suite 2000 Denver, CO 80202 Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY

RECEIVED APR 27 2009 DIV. OF OIL, GAS & MINING

No

Re: Final Permit EPA UIC Permit UT21103-07425 Well: Federal 7-33-8-18 SWNE Sec. 33-T8S-R18E Uintah County, Utah API No.: 43-047-35975

Dear Mr. Sundberg:

Enclosed is your copy of the FINAL Underground Injection Control (UIC) Permit for the proposed Federal 7-33-8-18 injection well. A Statement of Basis that discusses the conditions and requirements of this EPA UIC Permit, is also included.

The Public Comment period for this Permit ended on

comments on the Draft Permit were received during the Public Notice period; therefore the Effective Date for this EPA UIC Permit is the date of issuance. All conditions set forth herein refer to Title 40 Parts 124, 144, 146, and 147 of the Code of Federal Regulations (CFR) and are regulations that are in effect as of the Effective Date of this Permit.

Please note that under the terms and conditions of this Final Permit you are authorized only to construct the proposed injection well. Prior to commencing injection, you first must fulfill all "Prior to Commencing Injection" requirements of the Final Permit, Part II Section C.1, and obtain written Authorization to Inject from the EPA. It is your responsibility to be familiar with and to comply with all provisions of your Final Permit. The EPA forms referenced in the permit are available at http://www.epa.gov/safewater/uic/reportingforms.html. Guidance documents for Cement Bond Logging, Radioactive Tracer testing, Step Rate testing, Mechanical Integrity demonstration, Procedure in the Event of a Mechanical Integrity Loss, and other UIC guidances, are available at http://www.epa.gov/region8/water/uic/ deep_injection.html. Upon request, hard copies of the EPA forms and guidances can be provided.



APR 1 0 2009

This EPA UIC Permit is issued for the operating life of the well unless terminated (Part III, Section B). The EPA may review this Permit at least every five (5) years to determine whether any action is warranted pursuant to 40 CFR § 144.36(a).

If you have any questions on the enclosed Final Permit or Statement of Basis, please call Emmett Schmitz of my staff at (303) 312-6174, or toll-free at (800) 227-8917, ext. 312-6174.

Sincerely,

maudon

Eddie A. Sierra Acting Assistant Regional Administrator Office of Partnerships and Regulatory Assistance

enclosure: Final UIC Permit Statement of Basis Aquifer Exemption

cc:

Letter:

Uintah & Ouray Business Committee, Ute Indian Tribe: Curtis Cesspooch, Chairman Irene Cuch, Vice-Chairwoman Frances Poowegup, Councilwoman Ronald Groves, Councilman Phillip Chimburas, Councilman Steven Cesspooch, Councilman

Daniel Picard, Superintendent Uintah & Ouray Indian Agency U.S. Bureau of Indian Affairs

cc: all enclosures:

Michael Guinn District Manager Newfield Production Company Myton, Utah



Larry Love Director Energy & Minerals Dept. Ute Indian Tribe

Ferron Secakuku Director, Natural Resources Ute Indian Tribe

Gilbert Hunt Associate Director State of Utah - Natural Resources

Fluid Minerals Engineering Dept. U.S. Bureau of Land Management Vernal, Utah



UNDERGROUND INJECTION CONTROL PROGRAM PERMIT

PREPARED: April 2009

Permit No. UT21103-07425

Class II Enhanced Oil Recovery Injection Well

Federal 7-33-8-18 Uintah County, UT

Issued To

Newfield Production Company

1001 Seventeenth Street, Suite 2000 Denver, CO 80202

1.

Part I. AUTHORIZATION TO CONSTRUCT AND OPERATE	2
PART II. SPECIFIC PERMIT CONDITIONS	3
Section A. WELL CONSTRUCTION REQUIREMENTS	3
1. Casing and Cement	3
2. Injection Tubing and Packer	3
3. Sampling and Monitoring Devices	3
4. Well Logging and Testing	4
5. Postponement of Construction or Conversion	4
6. Workovers and Alterations	4
Section B. MECHANICAL INTEGRITY	4
1. Demonstration of Mechanical Integrity (MI)	5
2. Mechanical Integrity Test Methods and Criteria	5
3. Notification Prior to Testing	· 5 5
4. Loss of Mechanical Integrity	_
Section C. WELL OPERATION	6
1. Requirements Prior to Commencing Injection	6
 Injection Interval Injection Pressure Limitation 	6
4. Injection Volume Limitation	7
5. Injection Fluid Limitation	7
6. Tubing-Casing Annulus (TCA)	7
Section D. MONITORING, RECORDKEEPING, AND REPORTING OF RESULTS	. 7
1. Monitoring Parameters, Frequency, Records and Reports	7
2. Monitoring Methods	7
3. Records Retention	. 8
4. Annual Reports	8
Section E. PLUGGING AND ABANDONMENT	8
1. Notification of Well Abandonment, Conversion or Closure	9
2. Well Plugging Requirements	9
3. Approved Plugging and Abandonment Plan	9
4. Forty Five (45) Day Notice of Plugging and Abandonment	9
 5. Plugging and Abandonment Report 6. Inactive Wells 	9
	-

i

FINAL PERMIT

PART III. CONDITIONS APPLICABLE TO ALL PERMITS	11
Section A. EFFECT OF PERMIT	11
Section B. CHANGES TO PERMIT CONDITIONS	11
1. Modification, Reissuance, or Termination	11
2. Conversions	11
3. Transfer of Permit	11
4. Permittee Change of Address	12
5. Construction Changes, Workovers, Logging and Testing Data	12
Section C. SEVERABILITY	12
Section D. CONFIDENTIALITY	12
Section E. GENERAL PERMIT REQUIEMENTS	12 [°]
1. Duty to Comply	12
2. Duty to Reapply	· 13
Need to Halt or Reduce Activity Not a Defense	13
4. Duty to Mitigate	13
5. Proper Operation and Maintenance	13
6. Permit Actions	13
7. Property Rights	13
8. Duty to Provide Information	13
9. Inspection and Entry	14
10. Signatory Requirements 11. Reporting requirements	14
Section F. FINANCIAL RESPONSIBILITY	15
1. Method of Providing Financial Responsibility	15 15
2. Insolvency	JJ
APPENDIX A - WELL CONSTRUCTION REQUIREMENTS	A-1
APPENDIX B - LOGGING AND TESTING REQUIREMENTS	B-1
APPENDIX C - OPERATING REQUIREMENTS	C-1
APPENDIX D - MONITORING AND REPORTING REQUIREMENTS	D-1
APPENDIX E - PLUGGING AND ABANDONMENT REQUIREMENTS	E-1
APPENDIX F - CORRECTIVE ACTION REQUIREMENTS	F-1

Permit UT21103-07425

ii

Permit

FINAL PERMIT

Part I. AUTHORIZATION TO CONSTRUCT AND OPERATE

Under the authority of the Safe Drinking Water Act and Underground Injection Control (UIC) Program regulations of the U. S. Environmental Protection Agency (EPA) codified at Title 40 of the Code of Federal Regulations (40 CFR) Parts 2, 124, 144, 146, and 147, and according to the terms of this Permit,

Newfield Production Company 1001 Seventeenth Street, Suite 2000 Denver, CO 80202

is authorized to construct and to operate the following Class II injection well or wells:

Federal 7-33-8-18 2145' FNL & 1912' FEL, SWNE S33, T8S, R18E Uintah County, UT

EPA regulates the injection of fluids into injection wells so that injection does not endanger underground sources of drinking water (USDWs). EPA UIC Permit conditions are based on authorities set forth at 40 CFR Parts 144 and 146, and address potential impacts to USDWs.

Under 40 CFR Part 144, Subpart D, certain conditions apply to all UIC Permits and may be incorporated either expressly or by reference. General permit conditions for which the content is mandatory and not subject to site-specific differences are not discussed in this document. Issuance of this Permit does not convey any property rights of any sort or any exclusive privilege, nor does it authorize injury to persons or property or invasion of other private rights, or any infringement of other Federal, State or local laws or regulations. (40 CFR §144.35) An EPA UIC Permit may be issued for the operating life of the injection well or project unless terminated for reasonable cause under 40 CFR §§144.39, 144.40 and 144.41, and may be reviewed at least once every five (5) years to determine if action is required under 40 CFR §144.36(a).

This Permit is issued for the life of the well(s) unless modified, revoked and reissued, or terminated under 40 CFR 144.39 or 144.40. This EPA Permit may be adopted, modified, revoked and reissued, or terminated if primary enforcement authority for a UIC Program is delegated to an Indian Tribe or State. Upon the effective date of delegation, reports, notifications, questions and other correspondence should be directed to the Indian Tribe or State Director.

APR 2 1 2009	Effective Date
Indiedon	
L Estation A Gianna	

Eddie A. Sierra Acting Assistant Regional Administrator* Office of Partnerships and Regulatory Assistance

*NOTE: The person holding this title is referred to as the "Director" throughout this Permit.

FINAL PERMIT

PART II. SPECIFIC PERMIT CONDITIONS

Section A. WELL CONSTRUCTION REQUIREMENTS

These requirements represent the approved minimum construction standards for well casing and cement, injection tubing, and packer.

Details of the approved well construction plan are incorporated into this Permit as APPENDIX A. Changes to the approved plan that may occur during construction must be approved by the Director prior to being physically incorporated.

1. Casing and Cement.

The well or wells shall be cased and cemented to prevent the movement of fluids into or between underground sources of drinking water. The well casing and cement shall be designed for the life expectancy of the well and of the grade and size shown in APPENDIX A. Remedial cementing may be required if shown to be inadequate by cement bond log or other attempted demonstration of Part II (External) mechanical integrity.

2. Injection Tubing and Packer.

Injection tubing is required, and shall be run and set with a packer at or below the depth indicated in APPENDIX A. The packer setting depth may be changed provided it remains below the depth indicated in APPENDIX A and the Permittee provides notice and obtains the Director's approval for the change.

3. Sampling and Monitoring Devices.

The Permittee shall install and maintain in good operating condition:

- (a) a "tap" at a conveniently accessible location on the injection flow line between the pump house or storage tanks and the injection well, isolated by shut-off valves, for collection of representative samples of the injected fluid; and
- (b) one-half (1/2) inch female iron pipe fitting, isolated by shut-off valves and located at the wellhead at a conveniently accessible location, for the attachment of a pressure gauge capable of monitoring pressures ranging from normal operating pressures up to the Maximum Allowable Injection Pressure specified in APPENDIX C:
 - (i) on the injection tubing; and
 - (ii) on the tubing-casing annulus (TCA); and
- (c) a pressure actuated shut-off device attached to the injection flow line set to shutoff the injection pump when or before the Maximum Allowable Injection Pressure (MAIP) specified in APPENDIX C is reached at the wellhead; and
- (d) a non-resettable cumulative volume recorder attached to the injection line.

4. Well Logging and Testing

Well logging and testing requirements are found in APPENDIX B. The Permittee shall ensure the log and test requirements are performed within the time frames specified in APPENDIX B. Well logs and tests shall be performed according to current EPA-approved procedures. Well log and test results shall be submitted to the Director within sixty (60) days of completion of the logging or testing activity, and shall include a report describing the methods used during logging or testing and an interpretation of the test or log results.

5. Postponement of Construction or Conversion

The Permittee shall complete well construction within one year of the Effective Date of the Permit, or in the case of an Area Permit within one year of Authorization of the additional well. Authorization to construct and operate shall expire if the well has not been constructed within one year of the Effective Date of the Permit or Authorization and the Permit may be terminated under 40 CFR 144.40, unless the Permittee has notified the Director and requested an extension prior to expiration. Notification shall be in writing, and shall state the reasons for the delay and provide an estimated completion date. Once Authorization has expired under this part, the complete permit process including opportunity for public comment may be required before Authorization to construct and operate may be reissued.

6. Workovers and Alterations

Workovers and alterations shall meet all conditions of the Permit. Prior to beginning any addition or physical alteration to an injection well that may significantly affect the tubing, packer or casing, the Permittee shall give advance notice to the Director and obtain the Director's approval. The Permittee shall record all changes to well construction on a Well Rework Record (EPA Form 7520-12), and shall provide this and any other record of well workover, logging, or test data to EPA within sixty (60) days of completion of the activity.

A successful demonstration of Part I MI is required following the completion of any well workover or alteration which affects the casing, tubing, or packer. Injection operations shall not be resumed until the well has successfully demonstrated mechanical integrity and the Director has provided written approval to resume injection.

Section B. MECHANICAL INTEGRITY

The Permittee is required to ensure each injection well maintains mechanical integrity at all times. The Director, by written notice, may require the Permittee to comply with a schedule describing when mechanical integrity demonstrations shall be made.

An injection well has mechanical integrity if:

(a) There is no significant leak in the casing, tubing, or packer (Part I); and

(b) There is no significant fluid movement into an underground source of drinking water through vertical channels adjacent to the injection well bore (Part II).

1. Demonstration of Mechanical Integrity (MI).

The operator shall demonstrate MI prior to commencing injection and periodically thereafter. Well-specific conditions dictate the methods and the frequency for demonstrating MI and are discussed in the Statement of Basis. The logs and tests are designed to demonstrate both internal (Part I) and external (Part II) MI as described above. The conditions present at this well site warrant the methods and frequency required in Appendix B of this Permit.

In addition to these regularly scheduled demonstrations of MI, the operator shall demonstrate internal (Part I) MI after any workover which affects the tubing, packer or casing.

The Director may require additional or alternative tests if the results presented by the operator are not satisfactory to the Director to demonstrate there is no movement of fluid into or between USDWs resulting from injection activity. Results of MI tests shall be submitted to the Director as soon as possible but no later than sixty (60) days after the test is complete.

2. Mechanical Integrity Test Methods and Criteria

EPA-approved methods shall be used to demonstrate mechanical integrity. Ground Water Section Guidance No. 34 "Cement Bond Logging Techniques and Interpretation", Ground Water Section Guidance No. 37, "Demonstrating Part II (External) Mechanical Integrity for a Class II injection well permit", and Ground Water Section Guidance No. 39, "Pressure Testing Injection Wells for Part I (Internal) Mechanical Integrity" are available from EPA and will be provided upon request.

The Director may stipulate specific test methods and criteria best suited for a specific well construction and injection operation.

3. Notification Prior to Testing.

The Permittee shall notify the Director at least 30 days prior to any scheduled mechanical integrity test. The Director may allow a shorter notification period if it would be sufficient to enable EPA to witness the mechanical integrity test. Notification may be in the form of a yearly or quarterly schedule of planned mechanical integrity tests, or it may be on an individual basis.

4. Loss of Mechanical Integrity.

If the well fails to demonstrate mechanical integrity during a test, or a loss of mechanical integrity becomes evident during operation (such as presence of pressure in the TCA, water flowing at the surface, etc.), the Permittee shall notify the Director within 24 hours (see Part III Section E Paragraph 11(e) of this Permit) and the well shall be shut-in within 48 hours unless the Director requires immediate shut-in.

Within five days, the Permittee shall submit a follow-up written report that documents test results, repairs undertaken or a proposed remedial action plan.

Injection operations shall not be resumed until after the well has successfully been repaired and demonstrated mechanical integrity, and the Director has provided approval to resume injection.

Section C. WELL OPERATION

INJECTION BETWEEN THE OUTERMOST CASING PROTECTING UNDERGROUND SOURCES OF DRINKING WATER AND THE WELL BORE IS PROHIBITED.

Injection is approved under the following conditions:

1. Requirements Prior to Commencing Injection.

Well injection, including for new wells authorized by an Area Permit under 40 CFR 144.33 (c), may commence only after all well construction and pre-injection requirements herein have been met and approved. The Permittee may not commence injection until construction is complete, and

- (a) The Permittee has submitted to the Director a notice of completion of construction and a completed EPA Form 7520-10 or 7520-12; all applicable logging and testing requirements of this Permit (see APPENDIX B) have been fulfilled and the records submitted to the Director; mechanical integrity pursuant to 40 CFR 146.8 and Part II Section B of this Permit has been demonstrated; and
 - (i) The Director has inspected or otherwise reviewed the new injection well and finds it is in compliance with the conditions of the Permit; or
 - (ii) The Permittee has not received notice from the Director of his or her intent to inspect or otherwise review the new injection well within 13 days of the date of the notice in Paragraph 1a, in which case prior inspection or review is waived and the Permittee may commence injection.

2. Injection Interval.

Injection is permitted only within the approved injection interval, listed in APPENDIX C. Additional individual injection perforations may be added provided that they remain within the approved injection interval and the Permittee provides notice to the Director in accordance with Part II, Section A, Paragraph 6.

3. Injection Pressure Limitation

- (a) The permitted Maximum Allowable Injection Pressure (MAIP), measured at the wellhead, is found in APPENDIX C. Injection pressure shall not exceed the amount the Director determines is appropriate to ensure that injection does not initiate new fractures or propagate existing fractures in the confining zone adjacent to USDWs. In no case shall injection pressure cause the movement of injection or formation fluids into a USDW.
- (b) The Permittee may request a change of the MAIP, or the MAIP may be increased or decreased by the Director in order to ensure that the requirements in Paragraph (a) above are fulfilled. The Permitee may be required to conduct a step rate injection test or other suitable test to provide information for determining the fracture pressure of the injection zone. Change of the permitted MAIP by the Director shall be by modification of this Permit and APPENDIX C.

4. Injection Volume Limitation.

Injection volume is limited to the total volume specified in APPENDIX C.

5. Injection Fluid Limitation.

Injected fluids are limited to those identified in 40 CFR 144.6(b)(2) as fluids used for enhanced recovery of oil or natural gas, including those which are brought to the surface in connection with conventional oil or natural gas production that may be commingled with waste waters from gas plants which are an integral part of production operations unless those waters are classified as a hazardous waste at the time of injection, pursuant to 40 CFR 144.6(b). Non-exempt wastes, including unused fracturing fluids or acids, gas plant cooling tower cleaning wastes, service wastes and vacuum truck wastes, are NOT approved for injection. This well is NOT approved for commercial brine injection, industrial waste fluid disposal or injection of hazardous waste as defined by CFR 40 Part 261. The Permittee shall provide a listing of the sources of injected fluids in accordance with the reporting requirements in Part II Section D Paragraph 4 and APPENDIX D of this Permit.

6. Tubing-Casing Annulus (TCA)

The tubing-casing annulus (TCA) shall be filled with water treated with a corrosion inhibitor, or other fluid approved by the Director. The TCA valve shall remain closed during normal operating conditions and the TCA pressure shall be maintained at zero (0) psi.

If TCA pressure cannot be maintained at zero (0) psi, the Permittee shall follow the procedures in Ground Water Section Guidance No. 35 "Procedures to follow when excessive annular pressure is observed on a well."

Section D. MONITORING, RECORDKEEPING, AND REPORTING OF RESULTS

1. Monitoring Parameters, Frequency, Records and Reports.

Monitoring parameters are specified in APPENDIX D. Pressure monitoring recordings shall be taken at the wellhead. The listed parameters are to be monitored, recorded and reported at the frequency indicated in APPENDIX D even during periods when the well is not operating.

Monitoring records must include:

- (a) the date, time, exact place and the results of the observation, sampling, measurement, or analysis, and;
- (b) the name of the individual(s) who performed the observation, sampling, measurement, or analysis, and;
- (c) the analytical techniques or methods used for analysis.

2. Monitoring Methods.

(a) Monitoring observations, measurements, samples, etc. taken for the purpose of complying with these requirements shall be representative of the activity or condition being monitored.

- (b) Methods used to monitor the nature of the injected fluids must comply with analytical methods cited and described in Table 1 of 40 CFR 136.3 or Appendix III of 40 CFR 261, or by other methods that have been approved in writing by the Director.
- (c) Injection pressure, annulus pressure, injection rate, and cumulative injected volumes shall be observed and recorded at the wellhead under normal operating conditions, and all parameters shall be observed simultaneously to provide a clear depiction of well operation.
- (d) Pressures are to be measured in pounds per square inch (psi).
- (e) Fluid volumes are to be measured in standard oil field barrels (bbl).
- (f) Fluid rates are to be measured in barrels per day (bbl/day).

3. Records Retention.

- (a) Records of calibration and maintenance, and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by this permit, and records of all data used to complete the application for this permit shall be retained for a period of AT LEAST THREE (3) YEARS from the date of the sample, measurement, report, or application. This period may be extended anytime prior to its expiration by request of the Director.
- (b) Records of the nature and composition of all injected fluids must be retained until three (3) years after the completion of any plugging and abandonment (P&A) procedures specified under 40 CFR 144.52(a)(6) or under Part 146 Subpart G, as appropriate. The Director may require the Permittee to deliver the records to the Director at the conclusion of the retention period. The Permittee shall continue to retain the records after the three (3) year retention period unless the Permittee delivers the records to the Director or obtains written approval from the Director to discard the records.

4. Annual Reports.

Whether the well is operating or not, the Permittee shall submit an Annual Report to the Director that summarizes the results of the monitoring required by Part II Section D and APPENDIX D.

The first Annual Report shall cover the period from the effective date of the Permit through December 31 of that year. Subsequent Annual Reports shall cover the period from January 1 through December 31 of the reporting year. Annual Reports shall be submitted by February 15 of the year following data collection. EPA Form 7520-11 may be copied and shall be used to submit the Annual Report, however, the monitoring requirements specified in this Permit are mandatory even if EPA Form 7520-11 indicates otherwise.

Section E. PLUGGING AND ABANDONMENT

Permit UT21103-07425

8

1. Notification of Well Abandonment, Conversion or Closure.

The Permittee shall notify the Director in writing at least forty-five (45) days prior to: 1) plugging and abandoning an injection well, 2) converting to a non-injection well, and 3) in the case of an Area Permit, before closure of the project.

2. Well Plugging Requirements

Prior to abandonment, the injection well shall be plugged with cement in a manner which isolates the injection zone and prevents the movement of fluids into or between underground sources of drinking water, and in accordance with 40 CFR 146.10 and other applicable Federal, State or local law or regulations. Tubing, packer and other downhole apparatus shall be removed. Cement with additives such as accelerators and retarders that control or enhance cement properties may be used for plugs; however, volume-extending additives and gel cements are not approved for plug use. Plug placement shall be verified by tagging. Plugging gel of at least 9.6 lb/gal shall be placed between all plugs. A minimum 50 ft surface plug shall be set inside and outside of the surface casing to seal pathways for fluid migration into the subsurface. The Plugging Record must be certified as accurate and complete by the person responsible for the plugging operation. Prior to placement of the cement plug(s) the well shall be in a state of static equilibrium with the mud weight equalized top to bottom, either by circulating the mud in the well at least once or by a comparable method prescribed by the Director.

3. Approved Plugging and Abandonment Plan.

The approved plugging and abandonment plan is incorporated into this Permit as APPENDIX E. Changes to the approved plugging and abandonment plan must be approved by the Director prior to beginning plugging operations. The Director also may require revision of the approved plugging and abandonment plan at any time prior to plugging the well.

4. Forty Five (45) Day Notice of Plugging and Abandonment.

The Permittee shall notify the Director at least forty-five (45) days prior to plugging and abandoning a well and provide notice of any anticipated change to the approved plugging and abanonment plan.

5. Plugging and Abandonment Report.

Within sixty (60) days after plugging a well, the Permittee shall submit a report (EPA Form 7520-13) to the Director. The plugging report shall be certified as accurate by the person who performed the plugging operation. Such report shall consist of either:

- (a) A statement that the well was plugged in accordance with the approved plugging and abandonment plan; or
- (b) Where actual plugging differed from the approved plugging and abandonment plan, an updated version of the plan, on the form supplied by the Director, specifying the differences.

6. Inactive Wells.

After any period of two years during which there is no injection the Permittee shall plug and abandon the well in accordance with Part II Section E Paragraph 2 of this Permit unless the Permittee:

- (a) Provides written notice to the Director;
- (b) Describes the actions or procedures the Permittee will take to ensure that the well will not endanger USDWs during the period of inactivity. These actions and procedures shall include compliance with mechanical integrity demonstration, Financial Responsibility and all other permit requirements designed to protect USDWs; and
- (c) Receives written notice by the Director temporarily waiving plugging and abandonment requirements.

PART III. CONDITIONS APPLICABLE TO ALL PERMITS

Section A. EFFECT OF PERMIT

The Permittee is allowed to engage in underground injection in accordance with the conditions of this Permit. The Permittee shall not construct, operate, maintain, convert, plug, abandon, or conduct any other activity in a manner that allows the movement of fluid containing any contaminant into underground sources of drinking water, if the presence of that contaminant may cause a violation of any primary drinking water regulation under 40 CFR 142 or may otherwise adversely affect the health of persons. Any underground injection activity not authorized by this Permit or by rule is prohibited. Issuance of this Permit does not convey property rights of any sort or any exclusive privilege; nor does it authorize any injury to persons or property, any invasion of other private rights, or any infringement of any other Federal, State or local law or regulations. Compliance with the terms of this Permit does not constitute a defense to any enforcement action brought under the provisions of Section 1431 of the Safe Drinking Water Act (SDWA) or any other law governing protection of public health or the environment, for any imminent and substantial endangerment to human health or the environment, nor does it serve as a shield to the Permittee's independent obligation to comply with all UIC regulations. Nothing in this Permit relieves the Permittee of any duties under applicable regulations.

Section B. CHANGES TO PERMIT CONDITIONS

1. Modification, Reissuance, or Termination.

The Director may, for cause or upon a request from the Permittee, modify, revoke and reissue, or terminate this Permit in accordance with 40 CFR 124.5, 144.12, 144.39, and 144.40. Also, this Permit is subject to minor modification for causes as specified in 40 CFR 144.41. The filing of a request for modification, revocation and reissuance, termination, or the notification of planned changes or anticipated noncompliance on the part of the Permittee does not stay the applicability or enforceability of any condition of this Permit.

2. Conversions.

The Director may, for cause or upon a written request from the Permittee, allow conversion of the well from a Class II injection well to a non-Class II well. Conversion may not proceed until the Permittee receives written approval from the Director. Conditions of such conversion may include but are not limited to, approval of the proposed well rework, follow up demonstration of mechanical integrity, well-specific monitoring and reporting following the conversion, and demonstration of practical use of the converted configuration.

3. Transfer of Permit.

Under 40 CFR 144.38, this Permit is transferable provided the current Permittee notifies the Director at least thirty (30) days in advance of the proposed transfer date (EPA Form 7520-7) and provides a written agreement between the existing and new Permittees containing a specific date for transfer of Permit responsibility, coverage and liability between them. The notice shall adequately demonstrate that the financial responsibility requirements of 40 CFR 144.52(a)(7) will be met by the new Permittee. The Director may require modification or revocation and reissuance of the Permit to change the name of the Permittee and incorporate such other requirements as may be necessary under the Safe Drinking Water Act; in some cases, modification or revocation and reissuance is mandatory.

FINAL PERMIT

4. Permittee Change of Address.

Upon the Permittee's change of address, or whenever the operator changes the address where monitoring records are kept, the Permittee must provide written notice to the Director within 30 days.

5. Construction Changes, Workovers, Logging and Testing Data

The Permittee shall give advance notice to the Director, and shall obtain the Director's written approval prior to any physical alterations or additions to the permitted facility. Alterations or workovers shall meet all conditions as set forth in this permit. The Permittee shall record any changes to the well construction on a Well Rework Record (EPA Form 7520-12), and shall provide this and any other record of well workovers, logging, or test data to EPA within sixty (60) days of completion of the activity.

Following the completion of any well workovers or alterations which affect the casing, tubing, or packer, a successful demonstration of mechanical integrity (Part III, Section F of this Permit) shall be made, and written authorization from the Director received, prior to resuming injection activities.

Section C. SEVERABILITY

The Provisions of this Permit are severable, and if any provision of this Permit or the application of any provision of this Permit to any circumstance, is held invalid, the application of such provision to other circumstances, and the remainder of this Permit shall not be affected thereby.

Section D. CONFIDENTIALITY

In accordance with 40 CFR Part 2 and 40 CFR 144.5, information submitted to EPA pursuant to this Permit may be claimed as confidential by the submitter. Any such claim must be asserted at the time of submission by stamping the words "confidential business information" on each page containing such information. If no claim is made at the time of submission, EPA may make the information available to the public without further notice. If a claim is asserted, the validity of the claim will be assessed in accordance with the procedures in 40 CFR Part 2 (Public Information). Claims of confidentiality for the following information will be denied:

- The name and address of the Permittee, and

- information which deals with the existence, absence or level of contaminants in drinking water.

Section E. GENERAL PERMIT REQUIREMENTS

1. Duty to Comply.

The Permittee must comply with all conditions of this Permit. Any noncompliance constitutes a violation of the Safe Drinking Water Act (SDWA) and is grounds for enforcement action; for Permit termination, revocation and reissuance, or modification; or for denial of a permit renewal application; except that the Permittee need not comply with the provisions of this Permit to the extent and for the duration such noncompliance is authorized in an emergency permit under 40 CFR 144.34. All violations of the SDWA may subject the Permittee to penalties and/or criminal prosecution as specified in Section 1423 of the SDWA.

2. Duty to Reapply.

If the Permittee wishes to continue an activity regulated by this Permit after the expiration date of this Permit, under 40 CFR 144.37 the Permittee must apply for a new permit prior to the expiration date.

3. Need to Halt or Reduce Activity Not a Defense.

It shall not be a defense for a Permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this Permit.

4. Duty to Mitigate.

The Permittee shall take all reasonable steps to minimize or correct any adverse impact on the environment resulting from noncompliance with this Permit.

5. Proper Operation and Maintenance.

The Permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the Permittee to achieve compliance with the conditions of this Permit. Proper operation and maintenance includes effective performance, adequate funding, adequate operator staffing and training, and adequate laboratory and process controls, including appropriate quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems only when necessary to achieve compliance with the conditions of this Permit.

6. Permit Actions.

This Permit may be modified, revoked and reissued or teminated for cause. The filing of a request by the Permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance, does not stay any permit condition.

7. Property Rights.

This Permit does not convey any property rights of any sort, or any exclusive privilege.

8. Duty to Provide Information.

The Permittee shall furnish to the Director, within a time specified, any information which the Director may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with this permit. The Permittee shall also furnish to the Director, upon request, copies of records required to be kept by this Permit. The Permittee is required to submit any information required by this Permit or by the Director to the mailing address designated in writing by the Director.

9. Inspection and Entry.

The Permittee shall allow the Director, or an authorized representative, upon the presentation of credentials and other documents as may be required by law, to:

 Enter upon the Permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of this Permit;

- (b) Have access to and copy, at reasonable times, any records that must be kept under the conditions of this Permit;
- (c) Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this Permit; and,
- (d) Sample or monitor at reasonable times, for the purpose of assuring permit compliance or as otherwise authorized by the SDWA, any substances or parameters at any location.

10. Signatory Requirements.

All applications, reports or other information submitted to the Director shall be signed and certified according to 40 CFR 144.32. This section explains the requirements for persons duly authorized to sign documents, and provides wording for required certification.

11. Reporting Requirements.

- (a) Planned changes. The Permittee shall give notice to the Director as soon as possible of any planned changes, physical alterations or additions to the permitted facility, and prior to commencing such changes.
- (b) Anticipated noncompliance. The Permittee shall give advance notice to the Director of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements.
- (c) Monitoring Reports. Monitoring results shall be reported at the intervals specified in this Permit.
- (d) Compliance schedules. Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of this Permit shall be submitted no later than 30 days following each schedule date.
- (e) Twenty-four hour reporting. The Permittee shall report to the Director any noncompliance which may endanger human health or the environment, including:
 - (i) Any monitoring or other information which indicates that any contaminant may cause endangerment to a USDW; or
 - (ii) Any noncompliance with a permit condition or malfunction of the injection system which may cause fluid migration into or between USDWs.

Information shall be provided, either directly or by leaving a message, within twenty-four (24) hours from the time the permittee becomes aware of the circumstances by telephoning (800) 227-8917 and requesting EPA Region VIII UIC Program Compliance and Technical Enforcement Director, or by contacting the EPA Region VIII Emergency Operations Center at (303) 293-1788.

In addition, a follow up written report shall be provided to the Director within five (5) days of the time the Permittee becomes aware of the circumstances. The written submission shall contain a description of the noncompliance and its cause, the period of noncompliance including exact dates and times, and if the noncompliance has not been corrected the anticipated time it is expected to continue; and the steps taken or planned to reduce, eliminate, and prevent recurrence of the noncompliance.

- (f) Oil Spill and Chemical Release Reporting: The Permittee shall comply with all reporting requirements related to the occurence of oil spills and chemical releases by contacting the National Response Center (NRC) at (800) 424-8802, (202) 267-2675, or through the NRC website http://www.nrc.uscg.mil/index.htm.
- (g) Other Noncompliance. The Permittee shall report all instances of noncompliance not reported under paragraphs Part III, Section E Paragraph 11(b) or Section E, Paragraph 11(e) at the time the monitoring reports are submitted. The reports shall contain the information listed in Paragraph 11(e) of this Section.
- (h) Other information. Where the Permittee becomes aware that it failed to submit any relevant facts in the permit application, or submitted incorrect information in a permit application or in any report to the Director, the Permittee shall promptly submit such facts or information to the Director.

Section F. FINANCIAL RESPONSIBILITY

1. Method of Providing Financial Responsibility.

The Permittee shall maintain continuous compliance with the requirement to maintain financial responsibility and resources to close, plug, and abandon the underground injection well(s). No substitution of a demonstration of financial responsibility shall become effective until the Permittee receives written notification from the Director that the alternative demonstration of financial responsibility is acceptable. The Director may, on a periodic basis, require the holder of a permit to revise the estimate of the resources needed to plug and abandon the well to reflect changes in such costs and may require the Permittee to provide a revised demonstration of financial responsibility.

2. Insolvency.

In the event of:

- (a) the bankruptcy of the trustee or issuing institution of the financial mechanism; or
- (b) suspension or revocation of the authority of the trustee institution to act as trustee; or

(c) the institution issuing the financial mechanism losing its authority to issue such an instrument

the Permittee must notify the Director in writing, within ten (10) business days, and the Permittee must establish other financial assurance or liability coverage acceptable to the Director within sixty (60) days after any event specified in (a), (b), or (c) above.

The Permittee must also notify the Director by certified mail of the commencement of voluntary or involuntary proceedings under Title 11 (Bankruptcy), U.S. Code naming the owner or operator as debtor, within ten (10) business days after the commencement of the proceeding. A guarantor, if named as debtor of a corporate guarantee, must make such a notification as required under the terms of the guarantee.

APPENDIX A

WELL CONSTRUCTION REQUIREMENTS

See diagram.

The Federal No. 7-33-8-18 was drilled to a total depth of 6,190 feet (KB) in the Basal Carbonate Member of the Green River Formation.

Surface casing (8-5/8 inch) was set at a depth of 316 feet in a 12-1/4 inch hole using 160 sacks of Class "G" cement which was circulated to the surface.

Production casing (5-1/2 inch) was set at a depth of 6,150 feet (KB) in a 7-7/8 inch hole with 375 sacks of Premium Lite II and 475 sacks of 50/50 poz mix. This well construction is considered adequate to protect USDWs.

The EPA calculates the top of cement as 680 feet from the surface. The Cement Bond Log (CBL) identifies top of cement at 700 feet. CBL analysis does identify adequate 80% bond index cement bond across the Confining Zone.

The schematic diagram shows enhanced recovery injection perforations in the Douglas Creek Member of the Green River Formation. Additional perforations may be added at a later time between the depths of 3,945 feet and the top of the Wasatch Formation (Estimated to be 6,261 feet) provided the operator first notifies the Director and later submits an updated well completion report (EPA Form 7520-12) and schematic diagram.

The packer will be set no higher than 100 feet above the top perforation.

UT21/03-07425 Federal 7-33-8-18

Spud Date: 02/23/06 Fur of Production: 04-21-06 Proposed Injection Wellbore Diagram KP 1973. G.L. 1961 FRAC JOB 0-1/12/06 5710-5880 <210 B250 (15DWs SURFACE CASING USG SIZE: 8-5/8 316 GRADE J-55 WEIGHTE 244 LENGTH 746, (304-141) 680 TOC/EPA DEPTH LANDED: 315.99" KB HOLE SIZE 12-1/1" 1659 Green River CEMENT DATA: 100 sxs Class "G" end, est o bbls end to surf PRODUCTION CASING CSG SIZE: 54127 GRADE: J-55 WEIGHT, 15-5# LENGTH: 145 jts. (0137.197) DEPTH LANDED: 0150, 40 KB HOLE SIZE: 7-7/8" CEMENT DATA: 375 sxs Prem. Life II mixed & 475 sxs 50/50 POZ 3754 CEMENTTOP AT: 700 806 Bond TUBING SIZE/GRADE/WT.: 2-7/8" / J-55 / 6.5# NO, OF JOINTS: 188 jts. (5803.147) TUBING ANCHOR: 5813.141 KB -> 4357 NO. OF JOINTS: 2 its (62.20') SEATING NIPPLE: 2-7/8" (1.10") SN LANDED AT: 5878 141 KB NO OF JOINTS: 2 [IS (o1.907) TOTAL STRING LENGTH: EOT @ 65941.50 KB Castle Pezh 5722 - 5746 Packer (# 5705 5740-5744 \$702.5802 5821 5813 58 "3-5880" NEWFIELD PETL # 5082 BARNE A OLSO 6 126 Bass (Carbonzte HE A MASSIEL 6261 Est 14252 tel 6261

Initial Production: 33 BOPD, 10 MCFD: 29 BWPD

Frac CP.5, CPLCP2, CP3 sands as follows: 181 Io1# 20/10 sand in 1216 bbls Lightning1 frac fluid. Treated or ave press of 1528 psi-

wavg rate of 40.7 BPM ISIP 1520, ps. Cale Justic 5878 gal. Actual flush: 5670 gal.

3142 Tronz 3187-3200' Mahagany Bench

3784- 3945 Confining Zone 3845 Garden Gulla

4906 Douglas Greek

PERFOR.	ATION REC	CORD	
04/11/06	5873-5880	4.18PF	28 holes
04/11/06	5827-58431	4.1814	6 Tholes
04/11/06	5702, 5802	1.18PF	40 holes
0111/06	\$740.5214	USPU	to holes

Federal 7-33-8-18 2145° FNU & 1912, FEI SWONE Section 33-188-R18E Tentah Co-Etah te di abite esti balla della strazi

APPENDIX B

LOGGING AND TESTING REQUIREMENTS

Logs.

Logs will be conducted according to current UIC guidance. It is the responsibility of the Permittee to obtain and use guidance prior to conducting any well logging required as a condition of this permit.

NO LOGGING REQUIREMENTS

Tests.

Tests will be conducted according to current UIC guidance. It is the responsibility of the Permittee to obtain and use guidance prior to conducting any well test required as a condition of this permit.

TYPE OF TEST	DATE DUE
Standard Annulus Pressure	Prior to receiving authorization to inject and at least once within a five year period following the last successful test.
Pore Pressure	Prior to receiving authorization to inject.

APPENDIX C

OPERATING REQUIREMENTS

MAXIMUM ALLOWABLE INJECTION PRESSURE:

Maximum Allowable Injection Pressure (MAIP) as measured at the surface shall not exceed the pressure(s) listed below.

· ·	MAXIMUM ALLOWED INJECTION PRESSURE (psi)
WELL NAME	ZONE 1 (Upper)
Federal 7-33-8-18	1,495

INJECTION INTERVAL(S):

Injection is permitted only within the approved injection interval listed below. Injection perforations may be altered provided they remain within the approved injection interval and the Permittee provides notice to the Director in accordance with Part II, Section A, Paragraph 6. Specific injection perforations can be found in Appendix A.

ELL NAME: Federal 7-33-8-18		
·	APPROVED INJECTION INTERVAL (KB, ft)	FRACTURE GRADIENT
FORMATION NAME	TOP BOTTOM	(psi/ft)
Green River	3,945.00 - 6,261.00	0.700

ANNULUS PRESSURE:

The annulus pressure shall be maintained at zero (0) psi as measured at the wellhead. If this pressure cannot be maintained, the Permittee shall follow the procedures listed under Part II, Section C. 6. of this permit.

MAXIMUM INJECTION VOLUME:

ELL NAME: Federal 7-33-8-18	
	MAXIMUM VOLUME LIMIT (bbls)
Green River	

APPENDIX D

MONITORING AND REPORTING PARAMETERS

This is a listing of the parameters required to be observed, recorded, and reported. Refer to the permit Part II, Section D, for detailed requirements for observing, recording, and reporting these parameters.

OBSERVE	MONTHLY AND RECORD AT LEAST ONCE EVERY THIRTY DAYS
	Injection pressure (psig)
OBSERVE AND RECORD	Annulus pressure(s) (psig)
	Injection rate (bbl/day)
	Fluid volume injected since the well began injecting (bbls)

	ANNUALLY
	Injected fluid total dissolved solids (mg/l)
	Injected fluid specific gravity
ANALYZE	Injected fluid specific conductivity
	Injected fluid pH

	ANNUALLY
	Each month's maximum and averaged injection pressures (psig)
	Each month's maximum and minimum annulus pressure(s) (psig)
DEDODT	Each month's injected volume (bbl)
REPORT	Fluid volume injected since the well began injecting (bbl)
	Written results of annual injected fluid analysis
. •	Sources of all fluids injected during the year

In addition to these items, additional Logging and Testing results may be required periodically. For a list of those items and their due dates, please refer to APPENDIX B - LOGGING AND TESTING REQUIREMENTS.

APPENDIX E

PLUGGING AND ABANDONMENT REQUIREMENTS

See diagram.

The well shall be plugged in a manner that isolates the injection zone and prevents movement of fluid into or between USDWs and in accordance with other applicable Federal, State or local law or regulation. Tubing, packers, and any downhole apparatus shall be removed. Class A, C, G, and H cements, with additives such as accelerators and retarders that control or enhance cement properties, may be used for plugs. However, volume extending additives and gel cements are not approved for plug use. Plug placement shall be verified by tagging. Plugging gel of at least 9.2 lb/gal shall be placed between all plugs. Within sixty (60) days after plugging, the owner or operator shall submit Plugging Record (EPA Form 7520-13) to the Director. The Plugging Record must be certified as accurate and complete by the person responsible for the plugging operation. At a minimum, the following plugs are required:

PLUG NO. 1: Seal Injection Zone: Set a cast iron bridge plug (CIBP) no more than fifty (50) feet above the top injection perforation. Place at least twenty (20) feet of cement plug on top of the CIBP.

PLUG NO. 2: Seal Mahogany Shale and Trona intervals: Squeeze a cement plug on the backside of the 5-1/2 inch casing across the Trona Zone and the Mahogany Shale approximately 3,090 feet to 3,250 feet (unless pre-existing backside cement precludes cement-squeezing this interval) followed by a minimum 160-foot balanced cement plug inside the 5-1/2 inch casing across the Trona Zone and the Mahogany Shale, approximately 3,090 feet to 3,250 feet.

PLUG NO. 3: Seal USDWs: Squeeze a cement plug (1,590 feet - 1,710 feet) on the backside of the 5-1/2 inch casing across the base of the Uinta formation (unless preexisting backside cement precludes cement-squeezing this interval), followed by a minimum 120-foot balanced cement plug inside the 5-1/2 inch casing across the base of the Uinta Formation, approximately 1,590 feet to 1,710 feet.

PLUG NO.4: Seal Surface: Set a Class "G" cement plug within the 5-1/2 inch casing to 366 feet and up the 5-1/2 inch by 8-5/8 inch casings annulus to the surface.

Attachment Q-2

Federal 7-33-8-18

Space add (of 1306) Put on Production (of 2106) 1745 (1973) (GT) (1964)

Proposed P & A Wellbore Diagram

Circulate 114 sx Class G Cement down 5.472° cosing and up the -Base USDWs 5210 SURFACE CASING 5-1/2" x 8-5/8" annubus CSG SIZE 8-3-87 sure Shocia Mob GRADE USS Perforate 118PF to 366 WEIGHT: 2-08 LENGTH Fits, (304.147) Camon Top # 7001 DEPETITIANDED, 315 OW KB HOLE SIZE L'444" CEMINT DATA: 100 sxs Class "G" cmt, est o bbls cmt to surf PRODUCTION CASING 1596-1710 Cement Plug CSG SIZE 3412 1659 Green River GRADE 155 WEIGHT 18.5# LENGTH - 615 (IS, 16127,19-1 DEPTITLANDED 5150 40 KB HOLE SIZE 7-2.8" CHARLAT DATA, 375 sxs Pran. Law II mixed & 375 sxs 30/50 POZ. CHMENT TOP AT 500 3142 Tronz 3187 - 3200 Mahogany Bench Cement Plug 30 90- 32.50 3784 - 3945 Confining Zone 3945 Gerdan Gulch 49.06 Douglas Creek 20 + Class G Cament plug on top of CHRP CHRP + 58 + 3 bove fop pluf \$740-5244 5792-5802 5827-5843 5873-5880 NEWFIELD PR110-a-5082 6126 Basal Carbonzte Federal 7-33-8-18 SHOL a of SO MAR 400 & 1912 400 ° tay isb. Section 43-18S-R18h 10-164 90 mean et « 1 mh England the following state of the Est. Wessteh 6261

APPENDIX F

CORRECTIVE ACTION REQUIREMENTS

No corrective action is deemed necessary for this project.

STATEMENT OF BASIS

NEWFIELD PRODUCTION COMPANY FEDERAL 7-33-8-18 UINTAH COUNTY, UT

EPA PERMIT NO. UT21103-07425

CONTACT: Emmett Schmitz

U. S. Environmental Protection Agency Ground Water Program, 8P-W-GW 1595 Wynkoop Street Denver, Colorado 80202-1129 Telephone: 1-800-227-8917 ext. 312-6174

Permit UT21103-07425

FINAL PERMIT

Statement of Basis

This STATEMENT OF BASIS gives the derivation of site-specific UIC Permit conditions and reasons for them. Referenced sections and conditions correspond to sections and conditions in the Permit.

EPA UIC permits regulate the injection of fluids into underground injection wells so that the injection does not endanger underground sources of drinking water. EPA UIC permit conditions are based upon the authorities set forth in regulatory provisions at 40 CFR Parts 144 and 146, and address potential impacts to underground sources of drinking water. Under 40 CFR 144.35 Issuance of this permit does not convey any property rights of any sort or any exclusive privilege, nor authorize injury to persons or property of invasion of other private rights, or any infringement of other Federal, State or local laws or regulations. Under 40 CFR 144 Subpart D, certain conditions apply to all UIC Permits and may be incorporated either expressly or by reference. General Permit conditions for which the content is mandatory and not subject to site-specific differences (40 CFR Parts 144, 146 and 147) are not discussed in this document.

Upon the Effective Date when issued, the Permit authorizes the construction and operation of injection wells so that the injection does not endanger underground sources of drinking water, governed by the conditions specified in the Permit. The Permit is issued for the operating life of the injection well or project unless terminated for reasonable cause under 40 CFR 144.39, 144.40 and 144.41. The Permit is subject to EPA review at least once every five (5) years to determine if action is required under 40 CFR 144.36(a).

PART I. General Information and Description of Facility

Newfield Production Company 1001 Seventeenth Street, Suite 2000 Denver, CO 80202

on

September 19, 2006

submitted an application for an Underground Injection Control (UIC) Program Permit or Permit Modification for the following injection well or wells:

Federal 7-33-8-18	
2145' FNL & 1912' FEL, SWNE S33, T8S, R18E	•
Uintah County, UT	

Regulations specific to Uintah-Ouray Indian Reservation injection wells are found at 40 CFR 147 Subpart TT.

The application, including the required information and data necessary to issue or modify a UIC Permit in accordance with 40 CFR Parts 144, 146 and 147, was reviewed and determined by EPA to be complete.

The Permit will expire upon delegation of primary enforcement responsibility (primacy) for applicable portions of the UIC Program to the Ute Indian Tribe or the State of Utah unless the delegated agency has the authority and chooses to adopt and enforce this Permit as a Tribal or State Permit.

TABLE 1.1 shows the status of the well or wells as "New", "Existing", or "Conversion" and for Existing shows the original date of injection operation. Well authorization "by rule" under 40 CFR Part 144 Subpart C expires automatically on the Effective Date of an issued UIC Permit.

The Federal No. 7-33-8-18 is currently an active Green River Formation oil well. It is the initial intent of the Permittee to use current Douglas Creek Member production perforations for Class II enhanced recovery injection. The Federal No. 7-33-8-18 has adequate 80% bond index cement bond across the Confining Zone. This well has total depth in the Basal Carbonate Member.

	TABLE 1.1	
WELL STA	TUS / DATE OF OPERA	TION
	NEW WELLS	
Well Name	Well Status	Date of Operation
Federal 7-33-8-18	New	N/A

PART II. Permit Considerations (40 CFR 146.24)

Hydrogeologic Setting

Water wells for domestic supply in this area, when present, generally are completed into the shallow alluvium, the Duchesne River Formation, or the underlying Uinta Formation, and the water generally contains approximately 500 to 1,500 mg/l and higher total dissolved solids.

The Uinta-Animas aquifer in the Uinta Basin is present in water-yielding beds of sandstone, conglomerate, and siltstone of the Duchesne River and Uinta Formations, the Renegade Tongue of the Wasatch Formation, and the Douglas Creek Member of the Green River Formation. The Renegade Tongue of the Wasatch Formation and the Douglas Creek Member of the Green River Formation contain an aquifer along the southern and eastern margins of the basin where the rocks primarily consist of fluvial, massive, irregularly bedded sandstone and siltstone. Water-yielding units in the Uinta-Animas aquifer in the Uinta Basin commonly are separated from each other and from the underlying Mesaverde aquifer by units of low permeability composed of claystone, shale, marlstone, or limestone. In the Uinta Basin, for example, the part of the aquifer in the Duchesne River and Uinta Formations ranges in thickness from 0 feet at the southern margin of the aquifer to as much as 9,000 feet in the north-central part of the aquifer. Ground-water recharge to the Uinta-Animas aquifer generally occurs in the areas of higher altitude along the margins of the basin. Ground water is discharged mainly to streams, springs, and by transpiration from vegetation growing along stream valleys. The rate of ground-water withdrawal is small, and natural discharge is approximately equal to recharge. Recharge occurs near the southern margin of the aquifer, and discharge occurs near the White and Green Rivers (from USGS publication HA 730-C). Water samples from Mesaverde sands in the nearby Natural Buttes Unit yielded highly saline water.

Geologic Setting (TABLE 2.1)

The proposed enhanced oil recovery injection well is located in the Greater Monument Butte Field, T7-9S and R15-19E, which lies near the center of the broad, gently northward dipping south flank of the Uinta Basin. More than 450 million barrels of oil (63 MT) have been produced from sediments of the Uinta Basin. The Uinta Basin is a topographic and structural trough encompassing an area of more than 9300 square mi (14,900 km) in northeast Utah. The basin is sharply asymmetrical, with a steep north flank bounded by the east-west-trending Uinta Mountains. and a gently dipping south flank. The Uinta Basin was formed in Paleocene to Eocene time, creating a large area of internal drainage which was filled by the ancestral Lake Uinta. The lacustrine, or fresh water lake-formed, sediments deposited in and around Lake Uinta make up the Uintah and Green River Formations. The southern shore of Lake Uinta was very broad and flat, resulting in large cyclic shifts of the location of the shoreline during the many repeated transgressive and regressive cycles caused by the climatic and tectonic-induced rise and fall of water levels of the lake. Distributary-mouth bars, distributary channels, and near-shore bars are the primary oil producing sandstone reservoirs in the area. (Ref: "Reservoir Characterization of the Lower Green River Formation, Southwest Uinta Basin, Utah Biannual Technical Progress Report, 4/1/99-9/30/99", by C. D. Morgan, Program Manager, November 1999, Contract DE-AC26-98BC15103).

The Duchesne River Formation is absent in this area. Shale and siltstone of the Uintah Formation outcrop and compose the surface rock throughout the area. The lower 600 feet to 800 feet of the Uinta Formation, consisting generally of shale interbedded with occasionally water-bearing sandstone lenses between 5 feet to 20 feet thick, is underlain by the Green River Formation. The

Green River Formation is further subdivided into several Member and local marker units. The cyclic nature of Green River deposition in the southern shore area resulted in numerous stacked, intertonguing deltaic and near-shore sand and silt deposits. Red alluvial shale and siltstone deposits that intertongue with the Green River sediments are of the Colton and Wasatch Formations. Under the Wasatch Formation is the Mesaverde Formation, which consists primarily of continental-origin deposits of interbedded shale, sandstone, and coal.

The geologic dip is about 200 feet per mile, and there are no known surface faults in this area. Veins of gilsonite, a natural resinous hydrocarbon occasionally mined as a resource, occurs in the greater Uintah Basin though it is predominantly found on the eastern margin of the basin near the Colorado border. Vertical veins, generally between 2 ft to 6 ft wide but up to 28 ft wide, may extend many miles in length and occasionally extend as deep as 2000 ft. In this area within the Greater Monument Butte Field there is one known gilsonite vein. This vein is not considered to present a pathway for migration of fluid out of the injection zone because it terminates at depth of about 2000 ft, far above the protective confining layer and much deeper injection zone. Newfield and the owner of this former gilsonite mine have agreed to conditions for operation near this vein to ensure no potential for impact to this vein or to ground water from enhanced oil recovery operations.

TABLE 2.1 GEOLOGIC SETTING

Federal 7-33-8-18

Formation Name	Top (ft)	Base (ft)	TDS (mg/l)	Lithology
Uintah	0	1,659	<u></u>	Interbedded lacustrine sand, shale and carbonate with fluvial sand and shale.
Green River	1,659	3,945	· · · · · · · · · · · · · · · · · · ·	Interbedded lacustrine sand, shale and carbonate with fluvial sand and shale.
Green River Trona	3,142	3,187		Evaporite
Green River Mahogany Bench	3,187	3,200		Oil Shale
Green River Confining Zone	3,784	3,945		Shale
Green River Garden Gulch Member	3,945	4,906	· · · · ·	Interbedded lacustrine sand, shale and carbonate with fluvial sand and shale.
Green River Douglas Creek Member	4,906	6,126	7,451	Interbedded lacustrine sand, shale and carbonate with fluvial sand and shale.
Green River Basal Carbonate Member	6,126	6,261	· ·	Carbonate

Proposed Injection Zone(s) (TABLE 2.2)

An injection zone is a geological formation, group of formations, or part of a formation that receives fluids through a well. The proposed injection zones are listed in TABLE 2.2.

Injection will occur into an injection zone that is separated from USDWs by a confining zone which is free of known open faults or fractures within the Area of Review.

The Environmental Protection Agency (EPA) approved interval for Class II enhanced recovery injection in the Federal No. 7-33-8-18 is located between the top of the Garden Gulch Member (3,945 feet) and the top of the Wasatch Formation estimated to be 6,261 feet.

TABLE 2.2INJECTION ZONESFederal 7-33-8-18						
Formation Name	Top (ft)	Base (ft)	TDS (mg/l)	Fracture Gradient (psi/ft)	Porosity	Exempted?*
Green River	3,945	6,261	7,541	0.700		P .
* C - Currently Exempted E - Previously Exempted P - Proposed Exemption N/A - Not Applicable						

Confining Zone(s) (TABLE 2.3)

A confining zone is a geological formation, part of a formation, or a group of formations that limits fluid movement above the injection zone. The confining zone or zones are listed in TABLE 2.3.

The 161-foot (3,784 feet - 3,945 feet) shale and argillaceous silty shale Confining Zone directly overlies the top of the Garden Gulch Member.

	TABLE 2.3		
	CONFINING ZONES		•
	Federal 7-33-8-18		-
,		,	
Formation Name	Formation Lithology	Top (ft)	Base (ft)
Green River	Shale	3,784	3,945

Underground Sources of Drinking Water (USDWs) (TABLE 2.4)

Aquifers or the portions thereof which contain less than 10,000 mg/l total dissolved solids (TDS) and are being or could in the future be used as a source of drinking water are considered to be USDWs. The USDWs in the area of this facility are identified in TABLE 2.4.

Throughout the Greater Monument Butte Field area undergoing enhanced oil recovery operations, water analyses of the Green River Formation generally exhibit total dissolved solids (TDS) content well in excess of 10,000 mg/l. However, some recent water analyses from the field showed lower TDS values closer to 10,000 mg/l. While rain and surface water recharge into Green River Formation outcrops further south along the Book Cliffs/Roan Cliffs in effect "freshens" the Green River Formation water near those outcrops, in this area of the Monument Butte Field the observed occasional 'freshening' is ascribed to the effective dilution of the originally in-place high TDS water from injection of relatively fresh water for enhanced oil recovery operations. Water samples from deeper Mesaverde Formation sands in the nearby Natural Buttes Unit yield highly saline water.

The State of Utah "Water Wells and Springs" identifies no public water supply wells within the oneguarter (1/4) mile Area-of-Review (AOR) around the Federal No. 7-33-8-18. Technical Publication No. 92: State of Utah, Department of Natural Resources, cites the base of Underground Sources of Drinking Water (USDW) in the Uinta Formation approximately 210 feet from the surface. However, absent definitive information relaltive to the water quality of the Uinta Formation, from the depth of 210 feet to the base of the Uinta Formation (1659 feet), the EPA will require, during plugging and abandonment, a cement plug at the base of the Uinta Formation to protect contamination of possible Uinta USDWs.

TABLE 2.4

UNDERGROUND SOURCES OF DRINKING WATER (USDW)

Federal 7-33-8-18

Formation Name	Formation Lithology	Top (ft)	Base (ft)	TDS (mg/l)	
Uinta	Interbedded lacustrine sand, shale and carbonate with fluvial sand and shale.	0	1,659		, .

Exempted Aquifer(s) (40 CFR 144.7 and 146.4)

Aquifers exempted from protection as a USDW are listed in TABLE 2.5. Exempted is that portion of the aquifer between the depths listed ("TOP" and "BASE") and within the Exempted Radius of the well's surface location, or for an Area Permit, one-quarter (1/4) mile exterior to the defined Area Permit boundary. "Criteria" corresponds to the appropriate criteria (below) for exemption. "VOLUME" is the maximum volume of fluid which can be injected into the exempted area before the injected fluids exceed the exemption boundary, calculated using the following formula:

V = Pi * radius2 * height * porosity / 5.615

where V = VOLUME (in barrels) Pi = 3.1416 radius2 = Exempted Radius (squared) - generally 1/4 mile height = height of reservoir ("BOTTOM" - "TOP") porosity = reservoir porosity (in percent) 5.615 = comparison factor (subia fact nor barrel)

5.615 = conversion factor (cubic feet per barrel)

TABLE 2.5AQUIFER EXEMPTIONFederal 7-33-8-18						
Formation Name	Top (ft)	Base (ft)	Criteria	Volume (bbl)		
Green River	3,945	6,261	b(1)		······································	

An aquifer or a portion thereof may be determined to be an "exempted aquifer" provided it meets criteria, listed below.

a It does not currently serve as a source of drinking water; AND

b(1) It cannot now and will not in the future serve as a source of drinking water

FINAL PERMIT

because it is mineral, hydrocarbon, or geothermal energy producing, or can be demonstrated by a permit applicant as part of a permit for a Class II or III operation to contain minerals or hydrocarbons that considering their quantity and location are expected to be commercially producible; OR

- b(2) It cannot now and will not in the future serve as a source of drinking water because it is situated at a depth or location which makes recovery of water for drinking water purposes economically or technically impractical; OR
- b(3) It cannot now and will not in the future serve as a source of drinking water because it is so contaminated that it would be economically or technologically impractical to render that water fit for human consumption; OR
- b(4) It cannot now and will not in the future serve as a source of drinking water because it is located over a Class III well mining area subject to subsidence or catastrophic collapse; OR
- c The total dissolved solids content of the ground water is more than 3,000 and less than 10,000 mg/l and it is not reasonably expected to supply a public water system.

An August 1, 2006 "Production Water Analysis" - Run "D" obtained from the Federal No. 7-33-8-18 cites the total dissolved solids of the producing interval as 7,451 mg/l.

PART III. Well Construction (40 CFR 146.22)

The Federal No. 7-33-8-18 was drilled to a total depth of 6,190 feet (KB) in the Basal Carbonate Member of the Green River Formation.

Surface casing (8-5/8 inch) was set at a depth of 316 feet in a 12-1/4 inch hole using 160 sacks of Class "G" cement which was circulated to the surface.

Production casing (5-1/2 inch) was set at a depth of 6,150 feet (KB) in a 7-7/8 inch hole with 375 sacks of Premium Lite II and 475 sacks of 50/50 poz mix. This well construction is considered adequate to protect USDWs.

The EPA calculates the top of cement as 680 feet from the surface. The Cement Bond Log (CBL) identifies top of cement at 700 feet. CBL analysis does identify adequate 80% bond index cement bond across the Confining Zone.

The schematic diagram shows enhanced recovery injection perforations in the Douglas Creek Member of the Green River Formation. Additional perforations may be added at a later time between the depths of 3,945 feet and the top of the Wasatch Formation (Estimated to be 6,261 feet) provided the operator first notifies the Director and later submits an updated well completion report (EPA Form 7520-12) and schematic diagram.

The packer will be set no higher than 100 feet above the top perforation.

TABLE 3.1 WELL CONSTRUCTION REQUIREMENTS Federal 7-33-8-18						
Casing Type	Hole Size (in)	Casing Size (in)	Cased Interval (ft)	Cemented Interval (ft)		
Production	7.88	5.50	0 - 6,150	700 - 6,150		
Surface	12.25	8.63	0 - 316	0 - 316		

The approved well completion plan will be incorporated into the Permit as APPENDIX A and will be binding on the Permittee. Modification of the approved plan is allowed under 40 CFR 144.52(a)(1) provided written approval is obtained from the Director prior to actual modification.

Casing and Cementing (TABLE 3.1)

The well construction plan was evaluated and determined to be in conformance with standard practices and guidelines that ensure well injection does not result in the movement of fluids into USDWs. Well construction details for this "new" injection well is shown in TABLE 3.1.

Remedial cementing may be required if the casing cement is shown to be inadequate by cement bond log or other demonstration of Part II (External) mechanical integrity.

Tubing and Packer

Injection tubing is required to be installed from a packer up to the surface inside the well casing. The packer will be set above the uppermost perforation. The tubing and packer are designed to prevent injection fluid from coming into contact with the outermost casing.

Tubing-Casing Annulus (TCA)

The TCA allows the casing, tubing and packer to be pressure-tested periodically for mechanical integrity, and will allow for detection of leaks. The TCA will be filled with fresh water treated with a corrosion inhibitor or other fluid approved by the Director.

The tubing/casing annulus must be kept closed at all times so that it can be monitored as required under conditions of the Permit.

Monitoring Devices

The permittee will be required to install and maintain wellhead equipment that allows for monitoring pressures and providing access for sampling the injected fluid. Required equipment may include but is not limited to: 1) shut-off valves located at the wellhead on the injection tubing and on the TCA; 2) a flow meter that measures the cumulative volume of injected fluid; 3) fittings or pressure gauges attached to the injection tubing and the TCA for monitoring the injection and TCA pressure; and 4) a tap on the injection line, isolated by shut-off valves, for sampling the injected fluid.

All sampling and measurement taken for monitoring must be representative of the monitored activity.

PART IV. Area of Review, Corrective Action Plan (40 CFR 144.55)

TABLE 4.1 AOR AND CORRECTIVE ACTION Status Total TOC CAP Well Name Type (Abandoned Y/N) Depth (ft) Depth (ft)							
Federal No. 2-33-8-18	Producer	No	6,200	585	No		
Federal No. 6-33-8-18	Producer	No	6,201	904	No		
Federal No. 8-33-8-18	Producer	No	6,150	614	No		

TABLE 4.1 lists the wells in the Area of Review ("AOR") and shows the well type, operating status, depth, top of casing cement ("TOC") and whether a Corrective Action Plan ("CAP") is required for the well.

Area Of Review

Applicants for Class I, II (other than "existing" wells) or III injection well Permits are required to identify the location of all known wells within the injection well's Area of Review (AOR) which penetrate the injection zone, or in the case of Class II wells operating over the fracture pressure of the formation, all known wells within the area of review that penetrate formations which may be affected by increased pressure. Under 40 CFR 146.6 the AOR may be a fixed radius of not less than one quarter (1/4) mile or a calculated zone of endangering influence. For Area Permits, a fixed width of not less than one quarter (1/4) mile for the circumscribing area may be used.

Corrective Action Plan

For wells in the AOR which are improperly sealed, completed, or abandoned, the applicant shall develop a Corrective Action Plan (CAP) consisting of the steps or modifications that are necessary to prevent movement of fluid into USDWs.

The CAP will be incorporated into the Permit as APPENDIX F and become binding on the permittee.

TABLE 5.1 INJECTION ZONE PRESSURES Federal 7-33-8-18 Depth Used Fracture to Calculate Gradient Initial MAIP MAIP (ft) (psi/ft) (psi) **Formation Name** 1,495 0.700 5,740 Green River

PART V. Well Operation Requirements (40 CFR 146.23)

Approved Injection Fluid

The approved injection fluid is limited to Class II injection well fluids pursuant to 40 CFR § 144.6(b). For disposal wells injecting water brought to the surface in connection with natural gas storage operations, or conventional oil or natural gas production, the fluid may be commingled and the well used to inject other Class II wastes such as drilling fluids and spent well completion, treatment and stimulation fluid. Injection of non-exempt wastes, including unused fracturing fluids or acids, gas plant cooling tower cleaning wastes, service wastes, and vacuum truck and drum rinsate from trucks and drums transporting or containing non-exempt waste, is prohibited.

The authorized injectate shall be a blend of culinary-quality water from the Johnson Water District pipeline and/or water from the Green River water pipeline, and water from Green River oil wells proximate to the Federal No. 7-33-8-18.

Injection Pressure Limitation

Injection pressure, measured at the wellhead, shall not exceed a maximum calculated to assure that the pressure used during injection does not initiate new fractures or propagate existing fractures in the confining zones adjacent to the USDWs.

The applicant submitted injection fluid density and injection zone data which was used to calculate a formation fracture pressure and to determine the maximum allowable injection pressure (MAIP), as measured at the surface, for this Permit.

TABLE 5.1 lists the fracture gradient for the injection zone and the approved MAIP, determined according to the following formula:

$$FP = [fg - (0.433 * sg)] * d$$

FP = formation fracture pressure (measured at surface)

fg = fracture gradient (from submitted data or tests)

sg = specific gravity (of injected fluid)

d = depth to top of injection zone (or top perforation)

Injection Volume Limitation

Cumulative injected fluid volume limits are set to assure that injected fluids remain within the boundary of the exempted area. Cumulative injected fluid volume is limited when injection occurs into an aquifer that has been exempted from protection as a USDW.

There will be no restrictions on the cumulative volume or daily volume of authorized Class II fluid injected into the approved Green River Formation interval. The Permittee shall not exceed the maximum authorized injection pressure.

Mechanical Integrity (40 CFR 146.8)

An injection well has mechanical integrity if:

- 1. there is no significant leak in the casing, tubing, or packer (Part I); and
- 2. there is no significant fluid movement into a USDW through vertical channels adjacent to the injection well bore (Part II).

The Permit prohibits injection into a well which lacks mechanical integrity.

The Permit requires that the well demonstrate mechanical integrity prior to injection and periodically thereafter. A demonstration of mechanical integrity includes both internal (Part I) and external (Part II). The methods and frequency for demonstrating Part I and Part II mechanical integrity are dependent upon well-specific conditions as explained below.

Well construction and site-specific conditions dictate the following requirements for Mechanical Integrity (MI) demonstrations:

PART I MI: Internal MI will be demonstrated prior to beginning injection. Since this well is constructed with a standard casing, tubing, and packer configuration, a successful mechanical integrity test (MIT) is required to take place at least once every five (5) years. A demonstration of Part I MI is also required prior to resuming injection following any workover operation that affects the casing, tubing or packer. Part I MI may be demonstrated by a standard tubing-casing annulus pressure test using the maximum permitted injection pressure or 1000 psi, which ever is less, with a ten (10) percent or less pressure loss over thirty (30) minutes.

PART VI. Monitoring, Recordkeeping and Reporting Requirements

Injection Well Monitoring Program

At least once a year the permittee must analyze a sample of the injected fluid for total dissolved solids (TDS), specific conductivity, pH, and specific gravity. This analysis shall be reported to EPA annually as part of the Annual Report to the Director. Any time a new source of injected fluid is added, a fluid analysis shall be made of the new source.

Instantaneous injection pressure, injection flow rate, cumulative fluid volume and TCA pressures must be observed on a weekly basis. A recording, at least once every thirty (30) days, must be made of the injection pressure, annulus pressure, monthly injection flow rate and cumulative fluid volume. This information is required to be reported annually as part of the Annual Report to the Director.

PART VII. Plugging and Abandonment Requirements (40 CFR 146.10)

The well shall be plugged in a manner that isolates the injection zone and prevents movement of fluid into or between USDWs and in accordance with other applicable Federal, State or local law or regulation. Tubing, packers, and any downhole apparatus shall be removed. Class A, C, G, and H cements, with additives such as accelerators and retarders that control or enhance cement properties, may be used for plugs. However, volume extending additives and gel cements are not approved for plug use. Plug placement shall be verified by tagging. Plugging gel of at least 9.2 lb/gal shall be placed between all plugs. Within sixty (60) days after plugging, the owner or operator shall submit Plugging Record (EPA Form 7520-13) to the Director. The Plugging Record must be certified as accurate and complete by the person responsible for the plugging operation. At a minimum, the following plugs are required:

PLUG NO. 1: Seal Injection Zone: Set a cast iron bridge plug (CIBP) no more than fifty (50) feet above the top injection perforation. Place at least twenty (20) feet of cement plug on top of the CIBP.

PLUG NO. 2: Seal Mahogany Shale and Trona intervals: Squeeze a cement plug on the backside of the 5-1/2 inch casing across the Trona Zone and the Mahogany Shale approximately 3,090 feet to 3,250 feet (unless pre-existing backside cement precludes cement-squeezing this interval) followed by a minimum 160-foot balanced cement plug inside the 5-1/2 inch casing across the Trona Zone and the Mahogany Shale, approximately 3,090 feet to 3,250 feet.

PLUG NO. 3: Seal USDWs: Squeeze a cement plug (1,590 feet - 1,710 feet) on the backside of the 5-1/2 inch casing across the base of the Uinta formation (unless pre-existing backside cement precludes cement-squeezing this interval), followed by a minimum 120-foot balanced cement plug inside the 5-1/2 inch casing across the base of the Uinta Formation, approximately 1,590 feet to 1,710 feet.

PLUG NO.4: Seal Surface: Set a Class "G" cement plug within the 5-1/2 inch casing to 366 feet and up the 5-1/2 inch by 8-5/8 inch casings annulus to the surface.

Plugging and Abandonment Plan

Prior to abandonment, the well shall be plugged in a manner that isolates the injection zone and prevents movement of fluid into or between USDWs, and in accordance with any applicable Federal, State or local law or regulation. Tubing, packer and other downhole apparatus shall be removed. Cement with additives such as accelerators and retarders that control or enhance cement properties may be used for plugs; however, volume-extending additives and gel cements are not approved for plug use. Plug placement shall be verified by tagging. Plugging gel of at least 9.6 lb/gal shall be placed between all plugs. A minimum 50 ft surface plug shall be set inside and outside of the surface casing to seal pathways for fluid migration into the subsurface. Within sixty (60) days after plugging the owner or operator shall submit Plugging Record (EPA Form 7520 13) to the Director. The Plugging Record must be certified as accurate and complete by the person responsible for the plugging operation. The plugging and abandonment plan is described in Appendix E of the Permit.

PART VIII. Financial Responsibility (40 CFR 144.52)

Demonstration of Financial Responsibility

Permit UT21103-07425

FINAL PERMIT

Statement of Basis

The permittee is required to maintain financial responsibility and resources to close, plug, and abandon the underground injection operation in a manner prescribed by the Director. The permittee shall show evidence of such financial responsibility to the Director by the submission of a surety bond, or other adequate assurance such as financial statements or other materials acceptable to the Director. The Regional Administrator may, on a periodic basis, require the holder of a lifetime permit to submit a revised estimate of the resources needed to plug and abandon the well to reflect inflation of such costs, and a revised demonstration of financial responsibility if necessary. Initially, the operator has chosen to demonstrate financial responsibility with:

Financial Statement that was reviewed and approved by the EPA February 22, 2008.

Financial Statement, received April 22, 2005

Evidence of continuing financial responsibility is required to be submitted to the Director annually.

UNDERGROUND INJECTION CONTROL PROGRAM AQUIFER EXEMPTION

EPA PERMIT NO. UT21103-07425

Newfield Production Company

AQ	TABLE 1.1 UIFER EXEMPTION F Federal 7-33-8-		S)	
Formation Name	Top (ft)	Base (ft)	TDS (mg/l)	
Green River	3,945.00	6,261.00	7,541.00	

The formation listed above is hereby exempted from protection as an underground source of drinking water (USDW) in compliance with provisions of the Safe Drinking Water Act as amended (42 USC 300f-300j-9, commonly known as the SDWA) and attendant regulations at Title 40 of the Code of Federal Regulations, within the subsurface interval shown and within a 1/4 mile radial distance from the surface location of the:

Federal 7-33-8-18 Monument Butte (Uintah) 2145' FNL & 1912' FEL, SWNE S33, T8S, R18E Uintah County, UT

This aquifer exemption is granted in conjunction with an Underground Injection Control Permit issued for the injection of Class II fluids. This Aquifer Exemption has no expiration date.


APR 2 1 2009

The effective date of this exemption is

Eddie A. Sierra Acting Assistant Regional Administrator Office of Partnerships and Regulatory Assistance

*	STATE OF UTAH DEPARTMENT OF NATURAL R DIVISION OF OIL, GAS AN		5. LEASE DESIGNATION AND SERIAL NUMBER: USA UTU-74872
SUNDRY	NOTICES AND REPO	ORTS ON WELLS	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
	Il new wells, significantly deepen existing wells be		7. UNIT OF CA AGREEMENT NAME: SUNDANCE UNIT
wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals. 1. TYPE OF WELL: OIL WELL GAS WELL OTHER			8. WELL NAME and NUMBER: FEDERAL 7-33-8-18
2. NAME OF OPERATOR:		·····	9. API NUMBER:
NEWFIELD PRODUCTION COM 3. ADDRESS OF OPERATOR:	PANY	PHONE NUMBER	4304735975 10. FIELD AND POOL, OR WILDCAT:
Route 3 Box 3630	CITY Myton STATE UT	ZIP 84052 435.646.3721	MONUMENT BUTTE
4. LOCATION OF WELL: FOOTAGES AT SURFACE: 2145 FNL	1912 FEL		COUNTY: UINTAH
OTR/OTR, SECTION, TOWNSHIP, RANGE.	MERIDIAN: SWNE, 33, T8S, R18E		state: UT
11. CHECK APPROF	PRIATE BOXES TO INDICATI	E NATURE OF NOTICE, REPO	DRT, OR OTHER DATA
TYPE OF SUBMISSION	······································	TYPE OF ACTION	
	ACIDIZE	DEEPEN	REPERFORATE CURRENT FORMATION
NOTICE OF INTENT (Submit in Duplicate)	ALTER CASING	FRACTURE TREAT	SIDETRACK TO REPAIR WELL
Approximate date work will	CASING REPAIR	NEW CONSTRUCTION	TEMPORARITLY ABANDON
	CHANGE TO PREVIOUS PLANS	OPERATOR CHANGE	TUBING REPAIR
	Change Tubing	PLUG AND ABANDON	VENT OR FLAIR
X SUBSFOLIENT REPORT	CHANGE WELL NAME	PLUG BACK	WATER DISPOSAL
SUBSEQUENT REPORT (Submit Original Form Only)			
Date of Work Completion:	CHANGE WELL STATUS	PRODUCTION (START/STOP)	WATER SHUT-OFF
06/18/2009	COMMINGLE PRODUCING FORMATIONS	RECLAMATION OF WELL SITE	OTHER: -
	X CONVERT WELL TYPE	RECOMPLETE - DIFFERENT FORMATION	· · · · · · · · · · · · · · · · · · ·
was contacted concerning On 06/11/09 the casing wa	the initial MIT on the above listed we s pressured up to 1350 psig and ch pressure was 250 psig during the to	ell. Permission was given at that tin arted for 30 minutes with no pressu est. There was not an EPA represe	re loss. The well was not injecting ntative available to witness the test.
		Utah Divisi Oil, Gas and FOR RECOR	on of Mining
NAME (PLEASE PRINT) Jentri Park		TITLE_Production Tech	
SIGNATURE	MAL	DATE06/18/2009	

(This space for State use only)




DIV. OF OIL, GAS & MINING

) Casing	g or Annulus U.S. Unde	Pressu: Environment erground Inject	Integrity Test re Mechanical Integ tal Protection Agency ction Control Program DO Denver, CO 80202-2466	rity Test
EPA Witness: Test conducted by: Others present:	ale Giles			109
Well Name: <u>Federal</u>	7-33-8 = Unit c:33 T S N Id Product	-18 10 R/8	Type: ER SWD Sta	tus: AC TA UC <u>State</u> :
Is this a regularly schedule Initial test for permit? Test after well rework? Well injecting during test? Pre-test casing/tubing annul		Yes [Yes [Yes []	∠] No] No ∠] No ∠] No If Yes, rate: psig	bpd
MIT DATA TABLE	Test #1		Test #2	<u>Test #3</u>
TUBING	PRESSURE			
Initial Pressure	250	psig	psig	psig
End of test pressure	250	psig	psig	psig
CASING / TUBING	ANNULUS	-	PRESSURE	· · · ·
0 minutes	/350	psig	psig ·	psig
5 minutes	13.50	psig	psig	psig
10 minutes	1350	psig	psig	psig
15 minutes	1350	psig	psig	psig
20 minutes	1350	psig	psig	psig
25 minutes	1350	psig	psig	psig
30 minutes	1350	psig	psig	psig
minutes		psig	psig	psig
minutes		psig	psig	psig
RESULT	X Pass]Fail] Pass []Fail] Pass]Fail

Does the annulus pressure build back up after the test ? [] Yes MECHANICAL INTEGRITY PRESSURE TEST

Additional comments for mechanical integrity pressure test, such as volume of fluid added to annulus and bled back at end of test, reason for failing test (casing head leak, tubing leak, other), etc.:

Signature of Witness.

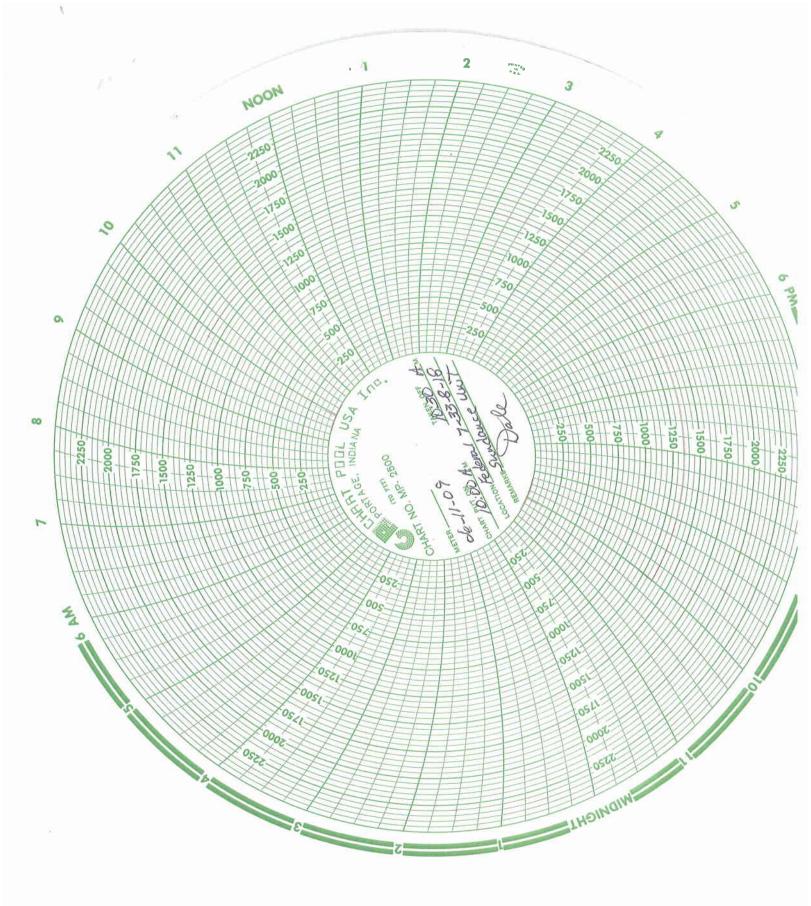

	STATE OF UTAH		
	DEPARTMENT OF NATURAL R DIVISION OF OIL, GAS AN		5. LEASE DESIGNATION AND SERIAL NUMBER: USA UTU-74872
SUNDRY	Y NOTICES AND REPO	DRTS ON WELLS	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
	rill new wells, significantly deepen existing wells b tal laterals. Use APPLICATION F <u>OR PERMIT</u> TO		7. UNIT OF CA AGREEMENT NAME: SUNDANCE UNIT
1. TYPE OF WELL: OIL WELL	GAS WELL OTHER		8. WELL NAME and NUMBER: FEDERAL 7-33-8-18
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COM	MPANY		9. API NUMBER: 4304735975
3. ADDRESS OF OPERATOR:	orme Marton STATE LIT	PHONE NUMBER	10. FIELD AND POOL, OR WILDCAT:
Route 3 Box 3630 4. LOCATION OF WELL:	CITY Myton STATE UT	ZIP 84052 435.646.3721	MONUMENT BUTTE
FOOTAGES AT SURFACE: 2145 FNL	1912 FEL		COUNTY: UINTAH
OTR/OTR, SECTION. TOWNSHIP. RANGE	MERIDIAN: SWNE, 33, T8S, R18E		state: UT
11. CHECK APPRO	PRIATE BOXES TO INDICAT	E NATURE OF NOTICE, REPC	ORT, OR OTHER DATA
TYPE OF SUBMISSION		TYPE OF ACTION	
X NOTICE OF INTENT	ACIDIZE	DEEPEN	REPERFORATE CURRENT FORMATION
(Submit in Duplicate)	ALTER CASING	FRACTURE TREAT	SIDETRACK TO REPAIR WELL
Approximate date work will	CASING REPAIR	NEW CONSTRUCTION	TEMPORARITLY ABANDON
07/14/2009	CHANGE TO PREVIOUS PLANS	OPERATOR CHANGE	U TUBING REPAIR
-	CHANGE TUBING	PLUG AND ABANDON	VENT OR FLAIR
SUBSEQUENT REPORT (Submit Original Form Only)	CHANGE WELL NAME	PLUG BACK	WATER DISPOSAL
Date of Work Completion:	CHANGE WELL STATUS	PRODUCTION (START/STOP)	WATER SHUT-OFF
	COMMINGLE PRODUCING FORMATIONS	RECLAMATION OF WELL SITE	X OTHER: - Change status put well on injection
	X CONVERT WELL TYPE	RECOMPLETE - DIFFERENT FORMATION	
NAME (PLEASE PRINT) <u>Kathy Chapma</u>	Utar Dil, Gi FOR R	Division of as and Mining ECORD ONLY	
SIGNATURE Standy	Mapon	DATE 07/15/2009	
(This space for State use only)	7.	<u></u>	
			RECEIVED
			JUL 1 6 2009
			JOE (0 KUNA

DIV. OF OIL, GAS & MINING



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

REGION 8 1595 Wynkoop Street DENVER, CO 80202-1129 Phone 800-227-8917 http://www.epa.gov/region08

JUL 0 8 2009

Ref: 8P-W-GW

<u>CERTIFIED MAIL</u> RETURN RECEIPT REQUESTED

Mr. Michael Guinn District Manager Newfield Production Company Route 3 - Box 3630 Myton, UT 84052 Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY

RE: Authority to Commence Injection Minor Permit Modification No. 1 Reduce MAIP No. 1 EPA UIC Permit UT21103-07425 Federal No. 7-33-8-18 Uintah County, Utah API #: 43-047-35975

Dear Mr. Guinn:

Newfield Production Company (Newfield) has satisfactorily completed Environmental Protection Agency (EPA) Prior to Commencing Injection requirements for Final Permit, UT21103-07425, effective April 21, 2009. The Part I (Internal) Mechanical Integrity Test (MIT), Well Rework Record (EPA Form No. 7520-12), schematic diagram, and pore pressure, were reviewed and approved by EPA on June 30, 2009.

Based upon structurally higher injection perforations post-conversion authorization, Newfield is authorized to commence injection, as of the date of this letter, into Federal No. 7-33-8-18 at a reduced maximum surface allowable injection pressure (MAIP) of 1,295 psig. Until such time as the Permittee demonstrates through a Step Rate Test (SRT) that the Fracture Gradient (FG) is other than 0.700 psi/ft, or the structurally highest injection perforation is not 4.977 feet, Federal No. 7-33-8-18 shall be operated at a MAIP no greater than 1,295 psig.

RECEIVED

JUL 1 6 2009

DIV. OF OIL, GAS & MINING

As of this approval, responsibility for permit compliance and enforcement is transferred to Region 8 UIC Technical Enforcement Program office. Therefore, please direct all monitoring and compliance correspondence to the following address, referencing your well name and UIC Permit number on all correspondence regarding this well to:

> Mr. Nathan Wiser Technical Enforcement Program – UIC U.S. EPA Region 8: Mail Code 8ENF-UFO 1595 Wynkoop Street Denver, CO 80202-1129

Or, you may reach Mr. Wiser by telephone at 303-312-6211, or 1 800-227-8927, ext. 312-6211.

Please remember that it is your responsibility to be aware of and to comply with all conditions of injection well Permit UT21103-07425.

If you have questions regarding the above action, please call Emmett Schmitz at 303-312-6174 or 1-800-227-8917, ext. 312-6174.

Sincerely,

Steven Pratt, P.E., CAPM (Inactive) Director Ground Water Program

cc:

Uintah & Ouray Business Committee, Ute Indian Tribe Curtis Cesspooch, Chairman Irene Cuch, Vice-Chairwoman Frances Poowegup, Councilwoman Ronald Groves, Councilman Phillip Chimburas, Councilman Steven Cesspooch, Councilman

Daniel Picard, Superintendent Uintah & Ouray Indian Agency U.S. Bureau of Indian Affairs

Eric Sundberg Newfield Production Company Denver, CO

2

Larry Love Director Energy & Minerals Dept. Ute Indian Tribe

Ferron Secakuku Director Natural Resources Ute Indian Tribe

Gilbert Hunt Associate Director State of Utah – Division of Oil, Gas & Mining

Fluid Minerals Engineering Dept. U.S. Bureau of Land Management Vernal, Utah

	STATE OF UTAH		FORM 9
	DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MININ		5.LEASE DESIGNATION AND SERIAL NUMBER: UTU-74872
SUNDRY NOTICES AND REPORTS ON WELLS			6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		7.UNIT or CA AGREEMENT NAME: GMBU (GRRV)	
1. TYPE OF WELL Water Injection Well			8. WELL NAME and NUMBER: FEDERAL 7-33-8-18
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		9. API NUMBER: 43047359750000	
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT	B. ADDRESS OF OPERATOR: PHONE NUMBER: Rt 3 Box 3630 , Myton, UT, 84052 435 646-4825 Ext		9. FIELD and POOL or WILDCAT: 8 MILE FLAT NORTH
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2145 FNL 1912 FEL			COUNTY: UINTAH
QTR/QTR, SECTION, TOWNSI	HIP, RANGE, MERIDIAN: 33 Township: 08.0S Range: 18.0E Meridia	n: S	STATE: UTAH
^{11.} CHEC	K APPROPRIATE BOXES TO INDICATE	NATURE OF NOTICE, REPOR	RT, OR OTHER DATA
TYPE OF SUBMISSION		TYPE OF ACTION	
		ALTER CASING	
NOTICE OF INTENT Approximate date work will start:	CHANGE TO PREVIOUS PLANS	CHANGE TUBING	CHANGE WELL NAME
	CHANGE WELL STATUS	COMMINGLE PRODUCING FORMATIONS	
Date of Work Completion: 5/8/2014	DEEPEN	FRACTURE TREAT	
5/6/2014		PLUG AND ABANDON	PLUG BACK
SPUD REPORT Date of Spud:	PRODUCTION START OR RESUME	RECLAMATION OF WELL SITE	RECOMPLETE DIFFERENT FORMATION
		SIDETRACK TO REPAIR WELL	
		VENT OR FLARE	WATER DISPOSAL
DRILLING REPORT Report Date:	WATER SHUTOFF	SI TA STATUS EXTENSION	
	WILDCAT WELL DETERMINATION	OTHER	OTHER: 5 YR MIT
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. 5 YR MIT performed on the above listed well. On 05/08/2014 the casing was pressured up to 1464 psig and charted for 30 minutes with no pressure loss. The well was injecting during the test. The tbg pressure was 1114 psig during the test. There was not an EPA representative available to witness the test. EPA #UT22197-07425			
NAME (PLEASE PRINT)	PHONE NUMBER		
Lucy Chavez-Naupoto	435 646-4874	Water Services Technician	
SIGNATURE N/A		DATE 6/4/2014	

Sundry Number: 51851 API Well Number: 43047359750000

Casing	g or Annulus Pre U.S. Enviro	ical Integrity T ssure Mechani onmental Protection Agency Id Injection Control Program Suite 500 Denver, CO 8020	ical Integri	ty Test
EPA Witness: Fest conducted by: Others present:	ris Walters	5	518	1 14
Well Name: <u>Fed</u> . 7 Field: <u>Mon</u> . <u>B</u> <u>mt</u> Location: <u>5</u> <u>w</u> / <u>NE</u> Se Operator: <u>Newfie</u> Last MIT: /	<u>2-33-8-18</u> <u>C</u> ec: <u>33</u> T <u>8</u> N/S e (d	Type: ER SV	ty: hintah	
Is this a regularly schedul Initial test for permit? Test after well rework? Well injecting during test? Pre-test casing/tubing annu	[] Yes [] Yes [] Yes	[入] No	'es, rate: <u>//</u> _ psig	bpd
MIT DATA TABLE	Test #1	Test #2		Test #3
TUBING	PRESSURE			
Initial Pressure	1113 ps	sig	psig	psig
A1141W1 A 1 400W1 4		•		
End of test pressure	///4 ps	sig	psig	psig
	///4 ps ANNULUS	ng PRESSURI		
End of test pressure CASING / TUBING	ANNULUS	and the second se		psig
End of test pressure	ANNULUS 1473,4 ps	PRESSURI	E	
End of test pressure <i>CASING / TUBING</i> 0 minutes	ANNULUS 1473,4 ps 1473.6 ps	PRESSURI	E psig	psig psig
End of test pressure <i>CASING / TUBING</i> 0 minutes 5 minutes	ANNULUS 1473,4 ps 1473.6 ps 1472.0 ps	PRESSURI	E psig psig	psig psig psig
End of test pressure <i>CASING / TUBING</i> 0 minutes 5 minutes 10 minutes	ANNULUS 1473,4 ps 1473.6 ps 1472.0 ps 1470.6 ps	PRESSURI sig sig sig	E psig psig psig	psig
End of test pressure <i>CASING / TUBING</i> 0 minutes 5 minutes 10 minutes 15 minutes	ANNULUS 1473.4 ps 1473.6 ps 1472.0 ps 1470.6 ps 1470.6 ps 1468.6 ps	PRESSURI sig sig sig sig	E psig psig psig psig	psig psig psig psig psig
End of test pressure <i>CASING / TUBING</i> 0 minutes 5 minutes 10 minutes 15 minutes 20 minutes	ANNULUS 1473.4 ps 1473.6 ps 1472.0 ps 1470.6 ps 1470.6 ps 1468.6 ps 1468.2 ps	PRESSURI sig sig sig sig sig sig	E psig psig psig psig psig psig	psig psig psig psig psig psig
End of test pressure <i>CASING / TUBING</i> 0 minutes 5 minutes 10 minutes 15 minutes 20 minutes 25 minutes	ANNULUS 1473,4 ps 1473,6 ps 1472.0 ps 1470.6 ps 1468.6 ps 1468.2 ps 1466.2 ps 1464.4 ps	PRESSURI sig sig sig sig sig sig	E psig psig psig psig psig psig psig	psig psig psig psig psig psig psig
End of test pressure <i>CASING / TUBING</i> 0 minutes 5 minutes 10 minutes 15 minutes 20 minutes 25 minutes 30 minutes	ANNULUS 1473.4 ps 1473.6 ps 1472.0 ps 1470.6 ps 1470.6 ps 1468.6 ps 1468.2 ps 1466.2 ps 1464.4 ps	PRESSURI sig sig sig sig sig sig sig sig	E psig psig psig psig psig psig psig psig	psig psig psig psig psig psig psig psig

Does the annulus pressure build back up after the test ? [] Yes [X] No MECHANICAL INTEGRITY PRESSURE TEST

Additional comments for mechanical integrity pressure test, such as volume of fluid added to annulus and bled back at end of test, reason for failing test (casing head leak, tubing leak, other), etc.:

Signature of Witness:_

(5-8-14)	
7-33-8-18 Fed. 5-yr MIT	5/8/2014 9:51:48 AM

Legend P23444 Absolute Pressure	10:25:00 AM 5/8/2014 -06:00
	10:16:40 AM 5/8/2014 -06:00
	10:08:20 AM 5/8/2014 -06:00
	10:00:00 AM 5/8/2014 -06:00
(isq) 9tulosdA I29 8 8 7 8 8 7 8 8 8 8 8 8 8 8 8 8 8 8 8 8	300-100-100-100-100-100-100-100-100-100-

Spud Date: 02/23/06 Put on Production: 04/21/06 K.B.: 4973, G.L.: 4961

Federal 7-33-8-18

Injection Wellbore Diagram

Initial Production: 33 BOPD, 10 MCFD, 29 BWPD

SURFACE CASING CSG SIZE: 8-5/8" GRADE: J-55 WEIGHT: 24# LENGTH: 7 jts. (304.14') DEPTH LANDED: 315.99' KB HOLE SIZE:12-1/4" CEMENT DATA: 160 sxs Class "G" cnn, est 6 bbls cnnt to surf. PRODUCTION CASING CSG SIZE: 5-1/2" GRADE: J-55 WEIGHT: 15.5# LENGTH. 145 jts. (6137.19') DEPTH LANDED: 6150.44' KB HOLE SIZE: 7-7/8" CEMENT DATA 375 sxs Prem. Lite II mixed & 475 sxs 50/50 POZ. CEMENT TOP AT: 700' TUBING SIZE/GRADE/WT : 2-7/8" / J-55 / 6.5# NO OF JOINTS: 159 jts (4908.75') SEATING NIPPLE: 2-7/8"(1.10') SN LANDED AT: 4918.75' KB PACKER CE @: 4923.05* TOTAL STRING LENGTH: EOT @ 4927.25' KB Packer @ 4923* EOT @ 4927 4977-4985 4988-4992 4996-50021 5006-5015 5740-5744 5792-5802 5827-5843 5873-5880 NEWFIELD L. PBTD @ 6082" Federal 7-33-8-18 SHOE (& 6150) 2145' FNL & 1912' FEL TD @ 66557 6175 SW/NE Section 33-T8S-R18E Uintah Co, Utah

04/12/06 5740-5880`	Frac CP.5,CP1,CP2,CP3 sands as follows 181461# 20/40 sand in 1276 bbk Lightning I frac fluid. Treated (@ avg press of 1528 psi w'avg rate of 40.7 BPM. ISIP 1520 psi. Calk flush: \$378 gal. Actual flush: \$670 gal
7/22/08 4977-5015	Frac D2 sds as follows: 75,737# 20/40 sand in 671 bbls of Lightning 17 fluid. Treated w/ ave pressure of 1556 psi @ ave rate of 23 5 BPM. ISIP 1830 psi. Actual flush: 4588 gals.
06/15/09	Actual flush: 4888 gals. Convert to Injection Well - MIT subm

update tbg detail

PERFO	RATION R	ECORD	
04/11/06	5873-5880'	4 JSPF	28 holes
04/11/06	5827-5843'	4 JSPF	64 holes
04/11/06	5792-5802	4 JSPF	40 holes
04/11/06	5740-5744	4 JSPF	16 holes
7 22/08	4977-4985	4 JSPF	32 holes
7/22/08	4988-4992'	4 JSPF	16 holes
7/22/08	4996-5002	4 JSPF	24 holes
7/22/08	5006-5015*	4 JSPF	36 holes

....

API #43-047-35975; Lease #UTU-74872

DI	STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES VISION OF OIL, GAS, AND MINI		FORM 9 5.LEASE DESIGNATION AND SERIAL NUMBER: UTU-74872	
			6. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
Do not use this form for below current bottom-h	Proposals to drill new wells, significantly ole depth, reenter plugged wells, or to d PERMIT TO DRILL form for such proposal	y deepen existing wells rill horizontal laterals.	7.UNIT or CA AGREEMENT NAME: GMBU (GRRV)	
1. TYPE OF WELL Water Injection Well				
2. NAME OF OPERATOR: Newfield Production Compar	ıy		9. API NUMBER: 43047359750000	
3. ADDRESS OF OPERATO 4 Waterway Square Place, Su	DR: ite 100, The Woodlands, TX, 77380	PHONE NUMBER: 435-646-4802		
4. LOCATION OF WELL FOOTAGES AT SURFACE			COUNTY: UINTAH	
	WNSHIP, RANGE, MERIDIAN: 3 Township: 8S Range: 18E Meridian: S		STATE: UTAH	
11. CHECk	APPROPRIATE BOXES TO INDICATI	E NATURE OF NOTICE	, REPORT, OR OTHER DATA	
TYPE OF SUBMISSION		TYPE OF ACTION	N	
An MIT was per requirements on in temporarily abandor up to 1050 psig and not injecting during t	ACIDIZE CHANGE TO PREVIOUS PLANS CHANGE WELL STATUS DEEPEN DEEPEN OPERATOR CHANGE PRODUCTION START OR RESUME REPERFORATE CURRENT FORMATION TUBING REPAIR WATER SHUTOFF WILDCAT WELL DETERMINATION VIDCAT WELL DETERMINATION D OR COMPLETED OPERATIONS. Clearly sl formed on the above listed well. In active wells Newfield Production is r n the subject well. On 03/29/2019 tl charted for 30 minutes with no prehe test. The tbg pressure was 394 p esentative available to witness the topology	regard to the permit requesting permission he casing was pressu essure loss. The well v osig during the test. T	 NEW CONSTRUCTION PLUG BACK RECOMPLETE DIFFERENT FORMATION ✓ TEMPORARY ABANDON WATER DISPOSAL APD EXTENSION OTHER: MIT including dates, depths, volumes, etc. Accepted by the Utah Division of Oil, Gas and Mining here	
NAME (PLEASE PRINT) Lucy Chavez-Naupoto	PHONE NUMB 435 646-4874	BER TITLE Field Production Assist	ant	
SIGNATURE N/A	+10+0+0+0	DATE 4/9/2019		

	Mechanical I	ntegrity Test	
Tu	bing/Casing Annu U.S. Environmental J Underground Injectio 1595 Wynkoop Street,	n Control Program	
EPA Witness:	contractions	Date: <u>3 / 2</u>	9 12019
Test conducted by: <u>Eur</u> Others present:			
			-07425
		Type: ER SWD	Status: AC TA UC
Field: <u>Monument (</u> Location: SWNE Se		18 (E)/W County: Uin	TAH State: UT
Operator: NEWField			
Last MIT: <u>5 / 8</u>	/ 2014 Maximum All	owable Pressure:	1476 PSIG
Nell injecting during tes Pre-test annulus pressu		NO bpd psig	1
MIT DATA TABLE	Test #1	Test #2	Test #3
TUBING		PRESSURE	RECORD
Initial Pressure	397 psig	psig	psig
End of test pressure	394 psig	psig	psig
CASING / TUBING	ANNULUS	PRESSURE	RECORD
0 minutes	1057.4 psig	psig	psig
5 minutes	1055,2 psig	psig	psig
10 minutes	1053.8 psig	psig	psig
1	in an in neig	psig	psig
15 minutes	1052.6 psig		
20 minutes	1052.0 psig		psig
20 minutes 25 minutes	1052.0 psig	psig psig	psig psig
20 minutes 25 minutes 30 minutes	1052.0 psig 1051.2 psig 1050.4 psig	psig psig psig	psig psig psig
20 minutes 25 minutes	1052.0 psig	psig psig psig psig	psig psig

Does the annulus pressure build back up after the test ? If Yes, No psig.

Legend P23442 Absolute Pressure	12:56:40 PM 3/29/2019
	· · · / · · · · · · · · · · · · · · · ·
	12:40:00 PM 3/29/2019
	1 12:31:40 PM 3/29/2019

Sundry Number: 95208 API Well Number: 43047359750000

Federal 7-33-8-18 (3/29/2019, 2 yr. MIT)

DI	STATE OF UTAH DEPARTMENT OF NATURAL RESOURCE VISION OF OIL, GAS, AND MIN		FORM 9 5.LEASE DESIGNATION AND SERIAL NUMBER: UTU-74872	
Do not use this form for below current bottom-ho	NOTICES AND REPORTS (proposals to drill new wells, significant ble depth, reenter plugged wells, or to c	ly deepen existing wells drill horizontal laterals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7.UNIT or CA AGREEMENT NAME: Greater Monument Butte	
1. TYPE OF WELL Water Injection Well	PERMIT TO DRILL form for such proposa	315.	8. WELL NAME and NUMBER: Federal 7-33-8-18	
2. NAME OF OPERATOR: Ovintiv Production, Inc.			9. API NUMBER: 43047359750000	
3. ADDRESS OF OPERATOR: 4 Waterway Square Place, Suite 100 , The Woodlands, TX, 77380 PHONE NUMBER: 281-210-5100			9. FIELD and POOL or WILDCAT: 8 MILE FLAT NORTH	
	: WNSHIP, RANGE, MERIDIAN: B Township: 8S Range: 18E Meridian: S		COUNTY: UINTAH STATE: UTAH	
	APPROPRIATE BOXES TO INDICAT	TE NATURE OF NOTICE	, REPORT, OR OTHER DATA	
TYPE OF SUBMISSION	TYPE OF ACTION			
A 2 YR MIT was perfo pressured up to 1152	D OR COMPLETED OPERATIONS. Clearly s rmed on the above listed well. On (PSIG and charted for 30 minutes v 425 PSIG during the test. There wa	02/24/2021 the casing with no pressure loss.	NEW CONSTRUCTION PLUG BACK RECOMPLETE DIFFERENT FORMATION TEMPORARY ABANDON WATER DISPOSAL APD EXTENSION OTHER: MIT including dates, depths, volumes, etc. Was	
NAME (PLEASE PRINT) Teresa Robbins SIGNATURE	PHONE NUM 435-646-4886	BER TITLE Warehouse Lead DATE		
N/A		2/25/2021		



February 25, 2021

Mr. Don Breffle UIC Enforcement Coordinator 8ENF—W-SDW 1595 Wynkoop Denver, CO 80202-1129

> RE: 2 Year MIT Well: Federal 7-33-8-18 EPA #: UT22197-07425 API #: 43-047-35975

Dear Mr. Breffle:

A 2 year MIT was conducted on the subject well on 02/24/2021. Attached are the EPA tubular sheet and a copy of the chart. You may contact me at (435)646-4886 or <u>Teresa.robbins@ovintiv.com</u> if you require further information.

Sincerely,

Mobbins

Teresa Robbins Warehouse Lead

Zyr MIT

	Mechanical In	tegrity lest	
Tu	bing/Casing Annu	lus Pressure Test	
	U.S. Environmental Pro Underground Injection 1595 Wynkoop Street, D	Control Program	
EPA Witness:		Date:2	412521
Test conducted by:	ustin Bennett		(
Others present:			
Well Name: Federa /	1 7-33-8-18	Type: ER SWD	Status: AC TA UC
Field: Jowmy	Bille		
	c: <u>33</u> T <u>S</u> NØR_	REIW County:	ta 6State:
Operator: <u>OUM fil</u> Last MIT: /	/ Maximum Allo	wable Pressure:	1476 PSIG
			<u>7770</u> P313
Well injecting during tes Pre-test annulus pressu		bpd psig	
r			
MIT DATA TABLE	Test #1	Test #2	Test #3
MIT DATA TABLE TUBING	Test #1	Test #2 PRESSURE	
and the second secon	Test #1 425 psig		
TUBING		PRESSURE	RECORD
TUBING Initial Pressure	425 psig 425 psig	PRESSURE psig	RECORD psig psig
TUBING Initial Pressure End of test pressure	425 psig 425 psig	PRESSURE psig psig	RECORD psig psig
TUBING Initial Pressure End of test pressure CASING / TUBING	425 psig 425 psig ANNULUS	PRESSURE psig psig PRESSURE	RECORD psig psig RECORD
TUBING Initial Pressure End of test pressure CASING / TUBING 0 minutes	425 psig 425 psig ANNULUS	PRESSURE psig psig PRESSURE psig	RECORD psig psig RECORD psig
TUBING Initial Pressure End of test pressure CASING / TUBING 0 minutes 5 minutes	425psig425psigANNULUS1152psig1152psig	PRESSURE psig psig PRESSURE psig psig	RECORD psig psig RECORD psig psig
TUBING Initial Pressure End of test pressure CASING / TUBING 0 minutes 5 minutes 10 minutes	425psig425psigANNULUS1152psig1152psig1152psig1152psig	PRESSURE psig psig PRESSURE psig psig psig	RECORD psig psig RECORD psig psig
TUBING Initial Pressure End of test pressure CASING / TUBING 0 minutes 5 minutes 10 minutes 15 minutes	425 psig 425 psig ANNULUS 1152 psig 1152 psig 1152 psig 1152 psig	PRESSURE psig psig PRESSURE psig psig psig	RECORD psig psig RECORD psig psig psig
TUBING Initial Pressure End of test pressure CASING / TUBING 0 minutes 5 minutes 10 minutes 15 minutes 20 minutes	425 psig 425 psig ANNULUS 1152 psig 1152 psig 1152 psig 1152 psig 1152 psig 1152 psig	PRESSURE psig psig PRESSURE psig psig psig psig	RECORD psig psig RECORD psig psig psig psig
TUBING Initial Pressure End of test pressure CASING / TUBING 0 minutes 5 minutes 10 minutes 15 minutes 20 minutes 25 minutes	425 psig 425 psig ANNULUS 1152 psig	PRESSURE psig psig PRESSURE psig psig psig psig psig psig	RECORD psig psig RECORD psig psig psig psig
TUBING Initial Pressure End of test pressure CASING / TUBING 0 minutes 5 minutes 10 minutes 15 minutes 20 minutes 30 minutes	425 psig 425 psig ANNULUS 115 psig 115 psig	PRESSURE psig psig PRESSURE psig psig psig psig psig psig psig	RECORD psig psig RECORD psig psig psig psig psig

Does the annulus pressure build back up after the test ? If Yes,

psig.

----, ---

Federal 7-33-8-18 (2 yr MIT) Feb.24,2021 2021-02-24 12:12:24 PM

PSI Absolute (psi) 500 1300 1400 1700-1900-1 1800-1 2000 1500-1600-200-300-600 -008 400 700-1 ملسر 12:16:40 PM 2021-02-24 -07:00 12:25:00 PM 2021-02-24 -07:00 12:33:20 PM 2021-02-24 -07:00 12:41:40 PM 2021-02-24 -07:00

Division of Oil, Gas and Mining Operator Change/Name Change Worksheet-for State use only

Effective Date:		1/24/2	020							
FORMER OPERATOR:				NEW OPERATOR:			_			
Newfield Production Company				Ovintiv Production, Inc.						
Groups: Greater Monument Butte										
WELL INFORMATION:										
Well Name	API Number	Town	Dir	Range	Dir	Sec	Entity Number	Туре	Status	
See Attached List										
Total Well Count: OPERATOR CHANGES DOCUM 1. Sundry or legal documentation wa	as received from	the FC		-			3/16/2020			
2. Sundry or legal documentation wa				erator on:	constance constance to lot		3/16/2020			
3. New operator Division of Corpora	ations Business	Numbe	r:		755627-0143	CHICK SHARES	13月1日日本人会议。			
REVIEW: Receipt of Acceptance of Drilling Pr Reports current for Production/Disp OPS/SI/TA well(s) reviewed for full UIC5 on all disposal/injection/storag Surface Facility(s) included in opera	cost bonding: A ge well(s) Appro	ies: Approve			1/14/2021 12/21/2020 3/25/2020	9/2/2020				
NEW OPERATOR BOND VERII State/fee well(s) covered by Bond N				B001834.A 107238142-Shut-In Bond						
DATA ENTRY: Well(s) update in the RBDMS on:				1/14/2021	1					
Group(s) update in RDBMS on:				1/14/2021						
Surface Facilities update in RBDMS	on:			1/14/2021						
Entities Updated in RBDMS on:										
COMMENTS:									_	

	STATE OF UTAH			FORM 9
	DEPARTMENT OF NATURAL RE DIVISION OF OIL, GAS ANI			5. LEASE DESIGNATION AND SERIAL NUMBER
				see attached list
SUNDRY	NOTICES AND REPO	ORTS ON WELL	S	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: see attached
Do not use this form for proposals to drill n drill horizontal k	new wells, significantly deepen existing wells be aterals. Use APPLICATION FOR PERMIT TO I	elow current bottom-hole depth, DRILL form for such proposals.	reenter plugged wells, or to	7 UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL OIL WELL	GAS WELL OTH	1ER		8. WELL NAME and NUMBER: see attached
2. NAME OF OPERATOR:				9. API NUMBER:
Newfield Production Com	pany			attached
3. ADDRESS OF OPERATOR: 4 Waterway Square Place St _{CIT}	The Woodlands		HONE NUMBER: (435) 646-4936	10. FIELD AND POOL, OR WILDCAT: attached
4. LOCATION OF WELL				
FOOTAGES AT SURFACE:				COUNTY
QTR/QTR. SECTION, TOWNSHIP, RAN	IGE, MERIDIAN:			STATE: UTAH
11. CHECK APP	ROPRIATE BOXES TO IND	ICATE NATURE C	F NOTICE, REP	ORT, OR OTHER DATA
TYPE OF SUBMISSION	T		PE OF ACTION	
	ACIDIZE	DEEPEN		REPERFORATE CURRENT FORMATION
(Submit in Duplicate)	ALTER CASING	FRACTURE T	REAT	SIDETRACK TO REPAIR WELL
Approximate date work will start	CASING REPAIR	NEW CONST	RUCTION	TEMPORARILY ABANDON
	CHANGE TO PREVIOUS PLANS		HANGE	TUBING REPAIR
	CHANGE TUBING	PLUG AND A	BANDON	VENT OR FLARE
SUBSEQUENT REPORT	CHANGE WELL NAME	PLUG BACK		WATER DISPOSAL
(Submit Original Form Only)	CHANGE WELL STATUS		N (START/RESUME)	WATER SHUT-OFF
Date of work completion:	COMMINGLE PRODUCING FORMAT		ON OF WELL SITE	
	CONVERT WELL TYPE		E - DIFFERENT FORMATIO	OTHER
12. DESCRIBE PROPOSED OR C	OMPLETED OPERATIONS. Clearly sho		of Newfield Prod	
This sundry is serve as no Inc. Attached is a list of a	all wells wells that will be ope	erated under Ovintiv	Production Inc e	
	all wells wells that will be ope NEV pany Ovin e Suite 100 4 W 30 The		ace Suite 100	
Inc. Attached is a list of a PREVIOUS NAME: Newfield Producion Com 4 Waterway Square Place The Woodlands, TX 7738	all wells wells that will be ope pany Ovin e Suite 100 4 W 30 The (435	erated under Ovintiv N NAME: htiv Production Inc. /aterway Square Pl Woodlands, TX 77	ace Suite 100 /380 Regulatory Ma	
Inc. Attached is a list of a PREVIOUS NAME: Newfield Producion Com 4 Waterway Square Plac The Woodlands, TX 7738 (435)646-4825	all wells wells that will be ope pany Ovin e Suite 100 4 W 30 The (435	erated under Ovintiv N NAME: htiv Production Inc. Vaterway Square Pl Woodlands, TX 77 5)646-4825	ace Suite 100 /380 Regulatory Ma	effective January 24, 2020.

STATE OF U		- 0			FORM 9		
DEPARTMENT OF NATUR. DIVISION OF OIL, GAS			[E DESIGNATION AND SERIAL NUMBER		
SUNDRY NOTICES AND R	EPORTS (ON WELI	LS		DIAN, ALLOTTEE OR TRIBE NAME:		
Do not use this form for proposals to drill new wells, significantly deepen existing drill horizontal laterals. Use APPLICATION FOR PER	wells below current MIT TO DRILL form	bottom-hole depti for such proposal	h, reenter plugged wells, or to s.	7 UNIT or CA AGREEMENT NAME:			
	OTHER				L NAME and NUMBER:		
2. NAME OF OPERATOR:					attached		
Newfield Production Company				attac			
3. ADDRESS OF OPERATOR: 4 Waterway Square Place SL _{CLTY} The Woodlands	ETX ZIP 77		PHONE NUMBER: (435) 646-4936		LD AND POOL, OR WILDCAT:		
4. LOCATION OF WELL							
FOOTAGES AT SURFACE:				COUNT	Y		
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:				STATE:	UTAH		
11. CHECK APPROPRIATE BOXES TO	INDICATE	NATURE	OF NOTICE, REPOR	RT, OF	R OTHER DATA		
TYPE OF SUBMISSION		TY	PE OF ACTION				
	Ľ	DEEPEN			REPERFORATE CURRENT FORMATION		
(Submit in Duplicate)	Γ.	FRACTURE	TREAT		SIDETRACK TO REPAIR WELL		
Approximate date work will start.		NEW CONST			TEMPORARILY ABANDON		
CHANGE TO PREVIOUS PL	ANS	OPERATOR			TUBING REPAIR		
	L.				VENT OR FLARE		
SUBSEQUENT REPORT (Submit Original Form Only) CHANGE WELL STATUS			DN (START/RESUME)		WATER DISPOSAL WATER SHUT-OFF		
Date of work completion:	FORMATIONS	-	ION OF WELL SITE		OTHER:		
	Г. Г	_	TE - DIFFERENT FORMATION		UTHER.		
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Cle	arly show all perti	nent details inc	luding dates, depths, volume	s, etc.			
This sundry is serve as notification of the formal of Inc. Attached is a list of all wells wells that will be	corporate na	me change	e of Newfield Produc	tion C			
PREVIOUS NAME: Newfield Producion Company	NEW NAM						
4 Waterway Square Place Suite 100	4 Waterway	Square P	lace Suite 100				
The Woodlands, TX 77380	The Woodla (435)646-48		7380				
(435)646-4825	(433)040-40	525					
		TITL	Regulatory Mana	ger, R	Rockies		
R R AACI		IIL					
SIGNATURE AND ALL SUMMOL		DAT	e <u>3/16/2020</u>	- 1			
(This space for State use only)							



STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS AND MINING

UIC FORM 5

	DIL, GAS & HEREING		
	TRANSFER OF AUT	HORITY TO IN.	JECT
Well Name and I See attached			API Number
Location of Well			Atttached Field or Unit Name
Footage :		County :	See Attached
-	Township, Range:	State : UTAH	Lease Designation and Number See Attached
EFFECTIVE D	DATE OF TRANSFER: 1/24/2020		
CURRENT OP	ERATOR		
Company:	Newfield Production Company	Name:	Shon McKinnon
Address:	4 Waterway Square Place, Suite 100		Onro Sco DA chinnor
Address.	city The Woodlands state TX zip 77380		Regulatory Manager, Rockies
Phone:	(435) 646-4825		3/18/2020
Comments:			
o o ninicita.			
NEW OPERAT	FOR		
	Ovintiv Production, Inc		Shon McKinnon
Company:	4 Waterway Square Place, Suite 100	_ Name.	R & Mall
Address:		Signature:	Regulatory Manager, Rockies
	city The Woodlands state TX zip 77380		3/18/2020
Phone:	(435) 646-4825	_ Date: _	
Comments			
(This space for S	Accepted by the Utah Division of Oil, Gas and Mining Mar 25, 2020 FOR RECORD ONLY	Max In Max In Perm. I Packer	nj. Interval

Permit Manager

Division of Oil, Gas and Mining Operator Change/Name Change Worksheet-for State use only

Effective Date:		7/1/2021	1264.5						
FORMER OPERATOR:				NEW OPERATOR:					
Ovintiv Production, Inc.				Ovintiv USA, Inc.					
Groups: Greater Monument Butte		a far a P							
WELL INFORMATION:									
Well Name	API Number	Town I	Dir	Range	Dir	Sec	Entity Number	Туре	Status
See Attached List									
Total Well Count: Pre-Notice Completed: OPERATOR CHANGES DOCUN 1. Sundry or legal documentation wi 2. Sundry or legal documentation wi 3. New operator Division of Corpora REVIEW: Receipt of Acceptance of Drilling Pr Reports current for Production/Disp OPS/SI/TA well(s) reviewed for full UIC5 on all disposal/injection/storag Surface Facility(s) included in opera	as received from as received from ations Business rocedures for A osition & Sunda cost bonding: A ge well(s) Appro-	n the FO n the NE Number: PD on: ries: Approved	W oper	ator on: stin	5053175-0143 9/22/2021 10/25/2021 10/4/2021	9/15/2021	9/15/2021 9/15/2021		
NEW OPERATOR BOND VERII State/fee well(s) covered by Bond N				GB Fed 13-20-8-17 Canvasback Fed 1-22-8-17 B001834-B					
DATA ENTRY: Well(s) update in the RBDMS on: Group(s) update in RDBMS on: Surface Facilities update in RBDMS Entities Updated in RBDMS on:				107238142A 11/24/2021 11/21/2021 11/24/2021 11/24/2021					

COMMENTS: 9/22/2021, Since the Newfield to Ovintiv operator change was processed at the beginning of 2021, Name change will only need to match the existing bonds in place under Ovintiv Production, Inc; no additiaonl bond will be required at this time.

STATE OF UTAH	FORM 9
DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS AND MINING	5. LEASE DESIGNATION AND SERIAL NUMBER: See attached list
SUNDRY NOTICES AND REPORTS ON WELLS	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	7. UNIT or CA AGREEMENT NAME:
TYPE OF WELL OIL WELL GAS WELL OTHER	8. WELL NAME and NUMBER:
2. NAME OF OPERATOR	9. API NUMBER:
Ovintiv Production, Inc.	
3. ADDRESS OF OPERATOR: 4 Waterway SQ PL STE 100 CITY The Woodlands STATE TX ZIP 77380 (281) 210-5100	10. FIELD AND POOL, OR WILDCAT:
4. LOCATION OF WELL FOOTAGES AT SURFACE:	COUNTY:
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:	STATE:
	UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPO	RT, OR OTHER DATA
TYPE OF SUBMISSION TYPE OF ACTION	
(Submit in Duplicate)	SIDETRACK TO REPAIR WELL
Approximate date work will start:	
7/1/2021 CHANGE TO PREVIOUS PLANS OPERATOR CHANGE	
	VENT OR FLARE
SUBSEQUENT REPORT CHANGE WELL NAME PLUG BACK	WATER DISPOSAL
Date of work completion:	WATER SHUT-OFF
COMMINGLE PRODUCING FORMATIONS RECLAMATION OF WELL SITE	OTHER:
CONVERT WELL TYPE RECOMPLETE - DIFFERENT FORMATION	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volume	es, etc.
This sundry is to serve as notification that Ovintiv Production Inc. merged into Ovintiv USA In will be operated under Ovintiv USA Inc. effect July 1, 2021.	nc. Attached is a list of all wells that
PREVIOUS NAME:NEW NAME:Ovintiv Production Inc.Ovintiv USA Inc.4 Waterway Square Place Suite 1004 Waterway Square Place Suite 100The Woodlands, TX 77380The Woodlands, TX 77380	
(281) 210-5100 (281) 210-5100	
NAME (PLEASE PRINT) Julia Carter TITLE Manager, US Reg	gulatory Operations
SIGNATURE Julia M Canter DATE 9/8/2021	
This space for State use only)	ROVED
By Ut	ah Division of
	as, and Mining
5/2000) (See Instructions on Reverse Side)	rel Medina



STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS AND MINING

UIC FORM 5

	OIL, GAS & MINTING		
	TRANSFER OF AU	THORITY TO I	NJECT
Well Name and See attache			API Number
Location of Wel			Attached Field or Unit Name
Footage :		County :	See Attached Lease Designation and Number
QQ, Section,	Township, Range:	State : UTAH	See Attached
EFFECTIVE	DATE OF TRANSFER: 7/1/2021		
CURRENT OF	PERATOR		
Company:	Ovintiv Production, Inc.	Name:	Julia Carter
Address:	4 Waterway Square Place, Suite 100	Signature:	Julion Caster
Address.	city The Woodlands state TX zip 77380	Title:	Manager, US Regulatory Operations
Phone:	(281) 210-5100	– Date:	9/8/2021
Comments			
Commente			
NEW OPERAT	TOR		
	Ovintiv USA Inc.		Julia Carter
Company:	4 Waterway Square Place Suite 100	_ Name:	~
Address:		_ Signature:	Manager, US Regulatory Operations
	city The Woodlands state TX zip 77380	_ Title:	9/8/2021
Phone:	(281) 210-5100	_ Date:	5/0/2021
Comments:			
		-	
(This space for S	tate use only) Accepted by the		
	Utah Division of		EPA approval required
	Oil, Gas and Mining		nj. Press.
	Oct 04, 2021		nj. Rate Inj. Interval
	FOR RECORD ONLY	Packe	r Depth
		Next	MIT Due

Par

DI	STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES VISION OF OIL, GAS, AND MINING	3	FORM 9 5.LEASE DESIGNATION AND SERIAL NUMBER: UTU-74872
Do not use this form for	NOTICES AND REPORTS ON proposals to drill new wells, significantly d	eepen existing wells	6. IF TRIBAL, ALLOTTEE OR TRIBE NAME:
Use APPLICATION FOR F 1. TYPE OF WELL	ble depth, reenter plugged wells, or to drill PERMIT TO DRILL form for such proposals.	horizontal laterals.	Greater Monument Butte 8. WELL NAME and NUMBER:
Water Injection Well 2. NAME OF OPERATOR: Ovintiv USA, Inc.		Federal 7-33-8-18 9. API NUMBER: 43047359750000	
3. ADDRESS OF OPERATO 4 Waterway Square Place, Su	DR: ite 100, The Woodlands, TX, 77380	PHONE NUMBER:	9. FIELD and POOL or WILDCAT: 8 MILE FLAT NORTH
	: WNSHIP, RANGE, MERIDIAN: 3 Township: 8S Range: 18E Meridian: S	COUNTY: UINTAH STATE:	
11.	APPROPRIATE BOXES TO INDICATE N	ATURE OF NOTICE.	REPORT, OR OTHER DATA
TYPE OF SUBMISSION		TYPE OF ACTIO	-
A 2 YR MIT was perfo pressured up to 1038	CHANGE TO PREVIOUS PLANS C CHANGE WELL STATUS C DEEPEN F OPERATOR CHANGE F PRODUCTION START OR RESUME F REPERFORATE CURRENT FORMATION S TUBING REPAIR V WATER SHUTOFF S WILDCAT WELL DETERMINATION V OR COMPLETED OPERATIONS. Clearly show rmed on the above listed well. On 08/ PSIG and charted for 30 minutes with 359 PSIG during the test. There was n	02/2022 the casing no pressure loss. T	New CONSTRUCTION PLUG BACK RECOMPLETE DIFFERENT FORMATION VATER DISPOSAL APD EXTENSION OTHER: MIT Cluding dates, depths, volumes, etc. Was
NAME (PLEASE PRINT) Teresa Robbins	PHONE NUMBER 435-646-4886	TITLE Warehouse Lead	
SIGNATURE N/A	433-040-4000	DATE 8/8/2022	



August 4, 2022

Mr. Don Breffle UIC Enforcement Coordinator 8ENF---W-SDW 1595 Wynkoop Denver, CO 80202-1129

> RE: 2 Year MIT Well: Federal 7-33-8-18 EPA #: UT22197-07425 API #: 43-047-35975

Dear Mr. Breffle:

A 2 YR MIT was conducted on the subject well on 08/02/2022. Attached are the EPA tubular sheet and a copy of the chart. You may contact me at (435)646·4886 or <u>Teresa.robbins@ovintiv.com</u> if you require further information.

Sincerely,

Jeresa hobbins

Teresa Robbins Operations Services Analyst

bing/Casing Al U.S. Environm Underground Ir	nnulus ental Protectio njection Contro	Pressure Test	
		Date: <u>8 / 2</u>	12022
<u>ment buffc</u> c: <u>33</u> T <u>8</u> N/(\$			
Initial test for perr Test after well rewo t? If Yes, rate:	mit? [ork? [Sig atara N Wanasa
Test #1		Test #2	Test #3
		PRESSURE	RECORD
359	psig	psig	psig
359	psig	psig	psig
ANNULUS		PRESSURE	RECORD
1030	psig	psig	psig
1036	psig	psig	psig
1037	psig	psig	psig
1037	psig	psig	psig
1038	psig	psig	psig
1038	psig	psig	psig
1038	psig	psig	psig
	psig	psig	psig
	bing/Casing Ai U.S. Environm Underground Ir 1595 Wynkoop S in Dohlburg 7-33-8-18 Mun 4 Mult c C: 33 T 8 N/ (S) / Maximum egularly scheduled te Initial test for perr Test after well rewo t? If Yes, rate: re: O Test #1 3 5 9 3 5 9 ANNULUS 1030 1036 1037 1037 1038	bing/Casing Annulus U.S. Environmental Protection Underground Injection Control 1595 Wynkoop Street, Denver, 7-33-8-18 Max 4 Mult C C: 33 T 8 N/S R 18 / Maximum Allowal egularly scheduled test? [X Initial test for permit? [Test after well rework? [t? If Yes, rate: re: 5.59 psig 3.5.9 psig 3.5.9 psig 3.5.9 psig 1030 psig 1036 psig 1037 psig 1037 psig 1037 psig 1038 psig	inDohlburg7-33-8-18Type: ER SWDmunt buff c::33T & N (S) R $IS (E)$ W County: (unk) /Maximum Allowable Pressure: $I'/7$ egularly scheduled test?[X] Yes [] NoInitial test for permit?[] Yes [X] NoTest after well rework?[] Yes [X] Notest after well rework?[] Yes [X] Notree: O psigpsigfe: O O psig $S = 9$ psig $S = 9$ psig $S = 9$ psig O psig

Does the annulus pressure build back up after the test ? If Yes, psig.

, ا، ان ال

Federal 7-33-8-18 (2yr)

-

							PS	I Abs	solut	te (p	si)	_	<u> </u>	 	<u> </u>	_	N	
8:06:40 AM 2022-08-02 -06:00		200-11	300-	400	600-u	700	008	I Abs			1200	1300-11	1400	1600	1800-	1900-11	000	
8:15:00 AM 2022-08-02 -06:00																		
05:00																		2022-08-02 8:05:59 AM
8:40:00 AM 2022-08-02 -06:00	Г															. 7		
																P23451	Legend	

Sundry Number: 118482 API Well Number: 43047359750000

Division of Oil, Gas and Mining Operator Change/Name Change Worksheet-for State use only

Effective Date:		9/1/202	22							
FORMER OPERATOR:				NEW OPERAT	OR:					
Ovintiv USA, Inc.				Scout Energy Ma	anagement, LLC					
Groups:										
WELL INFORMATION:										
Well Name	API Number	Town	Dir	Range	Dir	Sec	Entity Number	Туре	Status	
See Attached List										
Total Well Count: Pre-Notice Completed: OPERATOR CHANGES DOCUM 1. Sundry or legal documentation was 2. Sundry or legal documentation was 3. New operator Division of Corporat REVIEW: Receipt of Acceptance of Drilling Pro Reports current for Production/Dispo OPS/SI/TA well(s) reviewed for full UIC5 on all disposal/injection/storage Surface Facility(s) included in operat	s received from s received from tions Business ocedures for Al osition & Sundr cost bonding: <i>A</i> e well(s) Appro	n the FC n the NE Number PD on: ries: Approve	C W ope :: d by Du	rator on: 1stin	12607016-0161 10/19/2022 10/11/2022 12/15/2022	11/15/2022	9/26/2022 9/26/2022			
NEW OPERATOR BOND VERIF State/fee well(s) covered by Bond Nu DATA ENTRY: Well(s) update in the RBDMS on: Group(s) update in RDBMS on: Surface Facilities update in RBDMS Entities Updated in RBDMS on:	amber(s):			612402641-Blan 612402460-Full- 12/20/2022 and 1 12/20/2022 NA 1/25/2023	Cost Shut-In Bond					

	STATE OF UTAH DEPARTMENT OF NATURAL RESC	DURCES	FORM
	DIVISION OF OIL, GAS AND		5. LEASE DESIGNATION AND SERIAL NUMBER: See attached Exhibit A
SUNDR	Y NOTICES AND REPOR	TS ON WELLS	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: None - N/A
Do not use this form for proposals to drill drill drill horizontal	new wells, significantly deepen existing wells below laterals. Use APPLICATION FOR PERMIT TO DRI	current bottom-hole depth, reenter plugged wells, or to LL form for such proposals.	7. UNIT or CA AGREEMENT NAME
1. TYPE OF WELL OIL WELL			8. WELL NAME and NUMBER: See attached Exhibit A
2. NAME OF OPERATOR: Scout Energy Manageme	ant LLC		9. API NUMBER: Attached
3. ADDRESS OF OPERATOR: 13800 Montfort Road, Suite 1 _{CI}		PHONE NUMBER: (972) 325-1096	10. FIELD AND POOL, OR WILDCAT: See attached Exhibit A
4. LOCATION OF WELL	TY Dunus STATE	ZIP 10240 (012) 323-1030	
FOOTAGES AT SURFACE: See a	attached Exhibit A		COUNTY:
QTR/QTR, SECTION, TOWNSHIP, RA	NGE, MERIDIAN:		STATE:
			UTAH
11. CHECK APP TYPE OF SUBMISSION	KUPRIATE BOXES TO INDIC	ATE NATURE OF NOTICE, REF	ORT, OR OTHER DATA
	ACIDIZE		REPERFORATE CURRENT FORMATION
(Submit in Duplicate)		FRACTURE TREAT	SIDETRACK TO REPAIR WELL
Approximate date work will start:			
9/1/2022	CHANGE TO PREVIOUS PLANS		
SUBSEQUENT REPORT			
(Submit Original Form Only)	CHANGE WELL STATUS	PRODUCTION (START/RESUME)	WATER SHUT-OFF
Date of work completion:			H
	ary as notification of the transfer	of operatorship of the wells liste	d on the attached exhibit from Ovint
PREVIOUS OPERATOR Ovintiv USA Inc. 4 Waterway Square Plac The Woodlands, Texas 7	re, Suite 100 77380	eptember 1, 2022. NEW OPERATOR Scout Energy Man 13800 Montfort Ro Dallas, TX 75240	agement, LLC
PREVIOUS OPERATOR Ovintiv USA Inc. 4 Waterway Square Plac The Woodlands, Texas 7 A Signature - Christian C. S	e, Suite 100 77380 Sizemore	NEW OPERATOR Scout Energy Man 13800 Montfort Ro Dallas, TX 75240 Signature - Todd	agement, LLC ad, Suite 100 Hott
PREVIOUS OPERATOR Ovintiv USA Inc. 4 Waterway Square Plac The Woodlands, Texas 7	e, Suite 100 77380 Sizemore nd Innovation	NEW OPERATOR Scout Energy Man 13800 Montfort Ro Dallas, TX 75240 Signature - Todd Managing Director	agement, LLC ad, Suite 100 =Lott =Lott =12402460 / #61242461
PREVIOUS OPERATOR Ovintiv USA Inc. 4 Waterway Square Plac The Woodlands, Texas 7 Signature - Christian C. S Director, Rockies and La State/Fee Bond #105189	Exe, Suite 100 77380 Sizemore nd Innovation 19977	NEW OPERATOR Scout Energy Man 13800 Montfort Ro Dallas, TX 75240 Signature - Todd Managing Director State/Fee Bond #6	agement, LLC ad, Suite 100 =Lott 512402460 / #61242461 12462 ctor
PREVIOUS OPERATOR Ovintiv USA Inc. 4 Waterway Square Plac The Woodlands, Texas 7 Signature - Christian C. S Director, Rockies and La State/Fee Bond #105189 BLM Bond #105073466	e, Suite 100 77380 Sizemore nd Innovation 1977	NEW OPERATOR Scout Energy Man 13800 Montfort Ro Dallas, TX 75240 Signature - Todd Managing Director State/Fee Bond #6 BLM Bond #61240	agement, LLC ad, Suite 100 FLott 512402460 / #61242461 92462
PREVIOUS OPERATOR Ovintiv USA Inc. 4 Waterway Square Plac The Woodlands, Texas 7 Signature - Christian C. S Director, Rockies and La State/Fee Bond #105189 BLM Bond #105073466	e, Suite 100 77380 Sizemore nd Innovation 1977	NEW OPERATOR Scout Energy Man 13800 Montfort Ro Dallas, TX 75240 Signature - Todd Managing Director State/Fee Bond #6 BLM Bond #61240	agement, LLC ad, Suite 100 =Lott 512402460 / #61242461 22462 ctor
PREVIOUS OPERATOR Ovintiv USA Inc. 4 Waterway Square Plac The Woodlands, Texas 7 Signature - Christian C. S Director, Rockies and La State/Fee Bond #105189 BLM Bond #105073466	e, Suite 100 77380 Sizemore nd Innovation 1977	NEW OPERATOR Scout Energy Man 13800 Montfort Ro Dallas, TX 75240 Signature - Todd Managing Director State/Fee Bond #6 BLM Bond #61240 TITLE Managing Dire DATE T31/2	agement, LLC ad, Suite 100 =Lott 512402460 / #61242461 22462 ctor

1. 1.



STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS AND MINING

TRANSFER OF AUTHORITY TO INJECT

Well Name and Number see attached list		API Number attached
Location of Well Footage :	out see attached	Field or Unit Name see attached Exhibit A
QQ, Section, Township, Range:	County : see attached State : UTAH	Lease Designation and Number see attached Exhibit A

EFFECTIVE DATE OF TRANSFER: 9/1/2022

Company:	Ovintiv USA Inc.	Name: Christian C. Sizemore
Address:	4 Waterway Square Place, Suite 100	Signature:
	city The Woodlands state TX zip 77380	Title: Director, Rockies and Land Innovation
Phone:	281-210-5100	Date: 11/16/2022

Company:	Scout Energy Management LLC	Name: Jon Piot
Address:	13800 Montford Road, Suite 100	Signature:
	city Dallas state TX zip 75240	Title: Managing Director
Phone:	972-325-1027	Date: 11/15/2022
Comments	Change of operator effective 9/1/2022	

EPA approval required

Max Inj. Press. Max Inj. Rate Perm. Inj. Interval Packer Depth Next MIT Due