

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS AND MINING						FORM 3 AMENDED REPORT				
APPLICATION FOR PERMIT TO DRILL						1. WELL NAME and NUMBER GMBU G-13-9-16				
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>						3. FIELD OR WILDCAT MONUMENT BUTTE				
4. TYPE OF WELL Oil Well Coalbed Methane Well: NO						5. UNIT or COMMUNITIZATION AGREEMENT NAME GMBU (GRRV)				
6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY						7. OPERATOR PHONE 435 646-4825				
8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Myton, UT, 84052						9. OPERATOR E-MAIL mcrozier@newfield.com				
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UTU-64805			11. MINERAL OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>			12. SURFACE OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>				
13. NAME OF SURFACE OWNER (if box 12 = 'fee')						14. SURFACE OWNER PHONE (if box 12 = 'fee')				
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')						16. SURFACE OWNER E-MAIL (if box 12 = 'fee')				
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')			18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>			19. SLANT VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>				
20. LOCATION OF WELL	FOOTAGES		QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN			
LOCATION AT SURFACE	1974 FNL 835 FWL		SWNW	13	9.0 S	16.0 E	S			
Top of Uppermost Producing Zone	1497 FNL 1145 FWL		SWNW	13	9.0 S	16.0 E	S			
At Total Depth	1059 FNL 1452 FWL		NENW	13	9.0 S	16.0 E	S			
21. COUNTY DUCESNE			22. DISTANCE TO NEAREST LEASE LINE (Feet) 1059			23. NUMBER OF ACRES IN DRILLING UNIT 20				
			25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 1554			26. PROPOSED DEPTH MD: 6020 TVD: 5900				
27. ELEVATION - GROUND LEVEL 5542			28. BOND NUMBER WYB000493			29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 437478				
Hole, Casing, and Cement Information										
String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement	Sacks	Yield	Weight
SURF	12.25	8.625	0 - 300	24.0	J-55 ST&C	8.3	Class G	138	1.17	15.8
PROD	7.875	5.5	0 - 6020	15.5	J-55 LT&C	8.3	Premium Lite High Strength	278	3.26	11.0
							50/50 Poz	363	1.24	14.3
ATTACHMENTS										
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES										
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER					<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN					
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)					<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER					
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)					<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP					
NAME Heather Calder				TITLE Production Technician				PHONE 435 646-4936		
SIGNATURE				DATE 02/24/2014				EMAIL hcalder@newfield.com		
API NUMBER ASSIGNED 43013528680000				APPROVAL Permit Manager						

NEWFIELD PRODUCTION COMPANY
GMBU G-13-9-16
AT SURFACE: SW/NW SECTION 13, T9S R16E
DUCHESNE COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0' – 3,560'
Green River	3,560'
Wasatch	6,050'
Proposed TD	6,020'(MD) 5,900' (TVD)

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil) 3,560' – 6,050'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO ₃) (mg/l)
Dissolved Bicarbonate (NaHCO ₃) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO ₄) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. **Casing Design: GMBU G-13-9-16**

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	300'	24.0	J-55	STC	2,950 17.53	1,370 14.35	244,000 33.89
Prod casing 5-1/2"	0'	6,020'	15.5	J-55	LTC	4,810 2.51	4,040 2.11	217,000 2.33

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg
 Pore pressure at surface casing shoe = 8.33 ppg
 Pore pressure at prod casing shoe = 8.33 ppg
 Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. **Cementing Design: GMBU G-13-9-16**

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft ³ /sk)
			ft ³			
Surface casing	300'	Class G w/ 2% CaCl	138 161	30%	15.8	1.17
Prod casing Lead	4,020'	Prem Lite II w/ 10% gel + 3% KCl	278 905	30%	11.0	3.26
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363 451	30%	14.3	1.24

*Actual volume pumped will be 15% over the caliper log

- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
- Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ± 300 feet will be drilled with an air/mist system. The air rig is equipped with a 6 1/2" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ± 300 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.


9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated

bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the second quarter of 2014, and take approximately seven (7) days from spud to rig release.

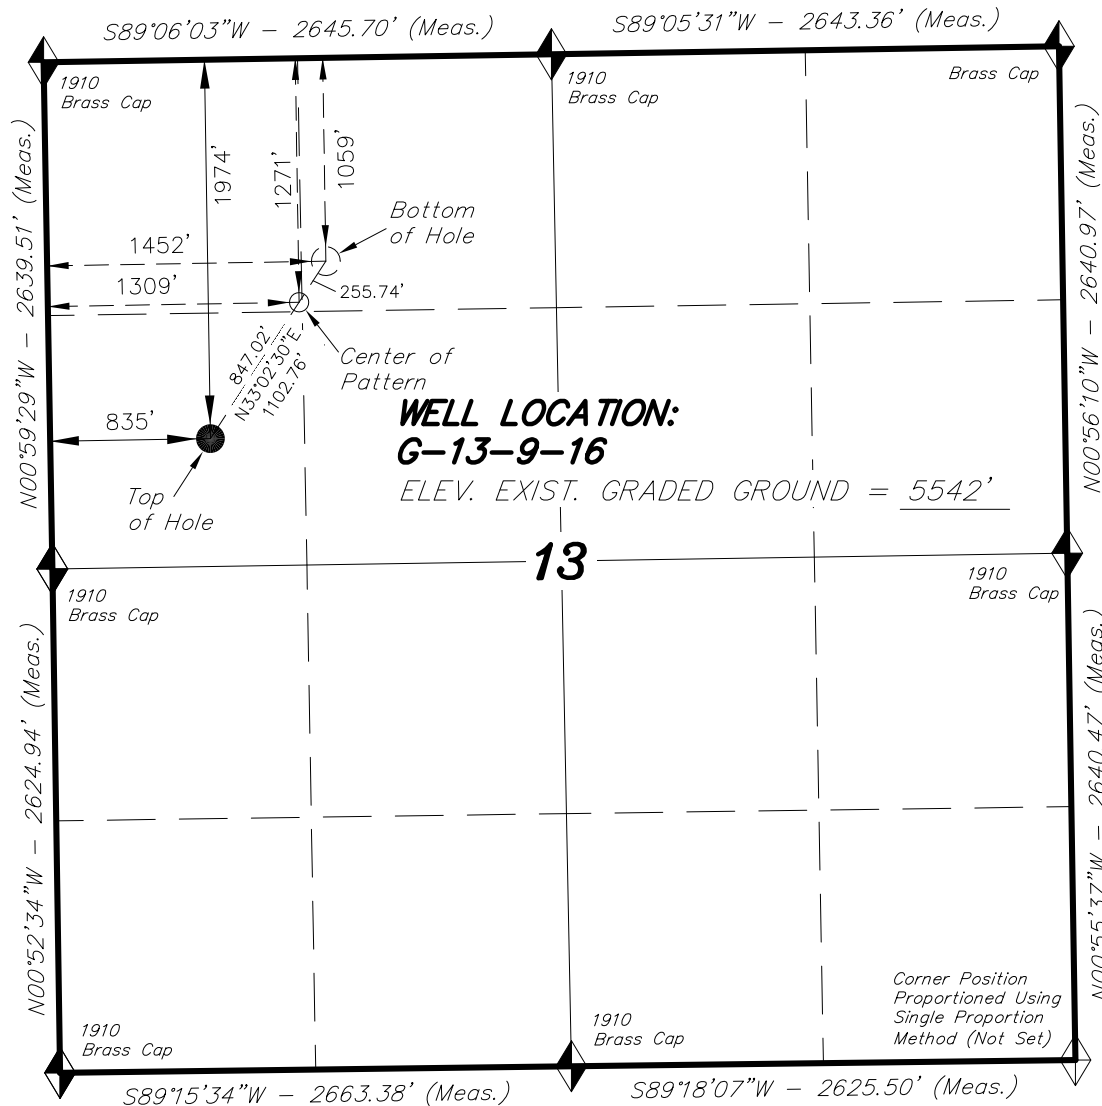T9S, R16E, S.L.B.&M.

◆ = SECTION CORNERS LOCATED


BASIS OF ELEV: Elevations are based on an N.G.S. OPUS Correction. LOCATION: LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

NAD 83 (SURFACE LOCATION)	
LATITUDE = 40°01'57.64"	
LONGITUDE = 110°04'27.25"	
NAD 27 (SURFACE LOCATION)	
LATITUDE = 40°01'57.78"	
LONGITUDE = 110°04'24.71"	
NAD 83 (CENTER OF PATTERN)	NAD 83 (BOTTOM HOLE LOCATION)
LATITUDE = 40°02'04.58"	LATITUDE = 40°02'06.68"
LONGITUDE = 110°04'21.17"	LONGITUDE = 110°04'19.34"
NAD 27 (CENTER OF PATTERN)	NAD 27 (BOTTOM HOLE LOCATION)
LATITUDE = 40°02'04.72"	LATITUDE = 40°02'06.81"
LONGITUDE = 110°04'18.63"	LONGITUDE = 110°04'16.80"

NEWFIELD EXPLORATION COMPANY


WELL LOCATION, G-13-9-16, LOCATED AS SHOWN IN THE SW 1/4 NW 1/4 OF SECTION 13, T9S, R16E, S.L.B.&M. DUCHESNE COUNTY, UTAH.

TARGET BOTTOM HOLE, G-13-9-16, LOCATED AS SHOWN IN THE NE 1/4 NW 1/4 OF SECTION 13, T9S, R16E, S.L.B.&M. DUCHESNE COUNTY, UTAH.

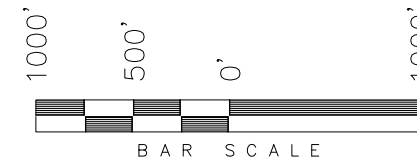**NOTES:**

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.


THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

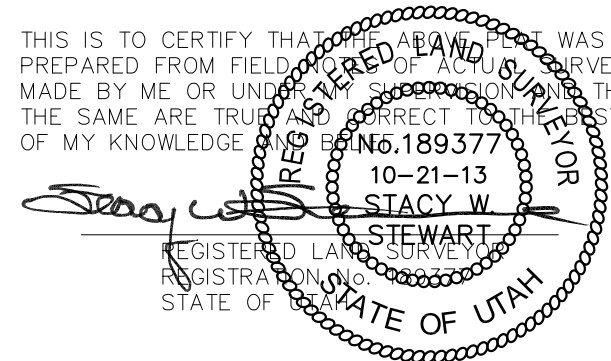**TRI STATE LAND SURVEYING & CONSULTING**

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
 (435) 781-2501

DATE SURVEYED: 08-06-12	SURVEYED BY: S.V.	VERSION:
DATE DRAWN: 10-21-13	DRAWN BY: V.H.	V1
REVISED:	SCALE: 1" = 1000'	

RECEIVED: February 24, 2014

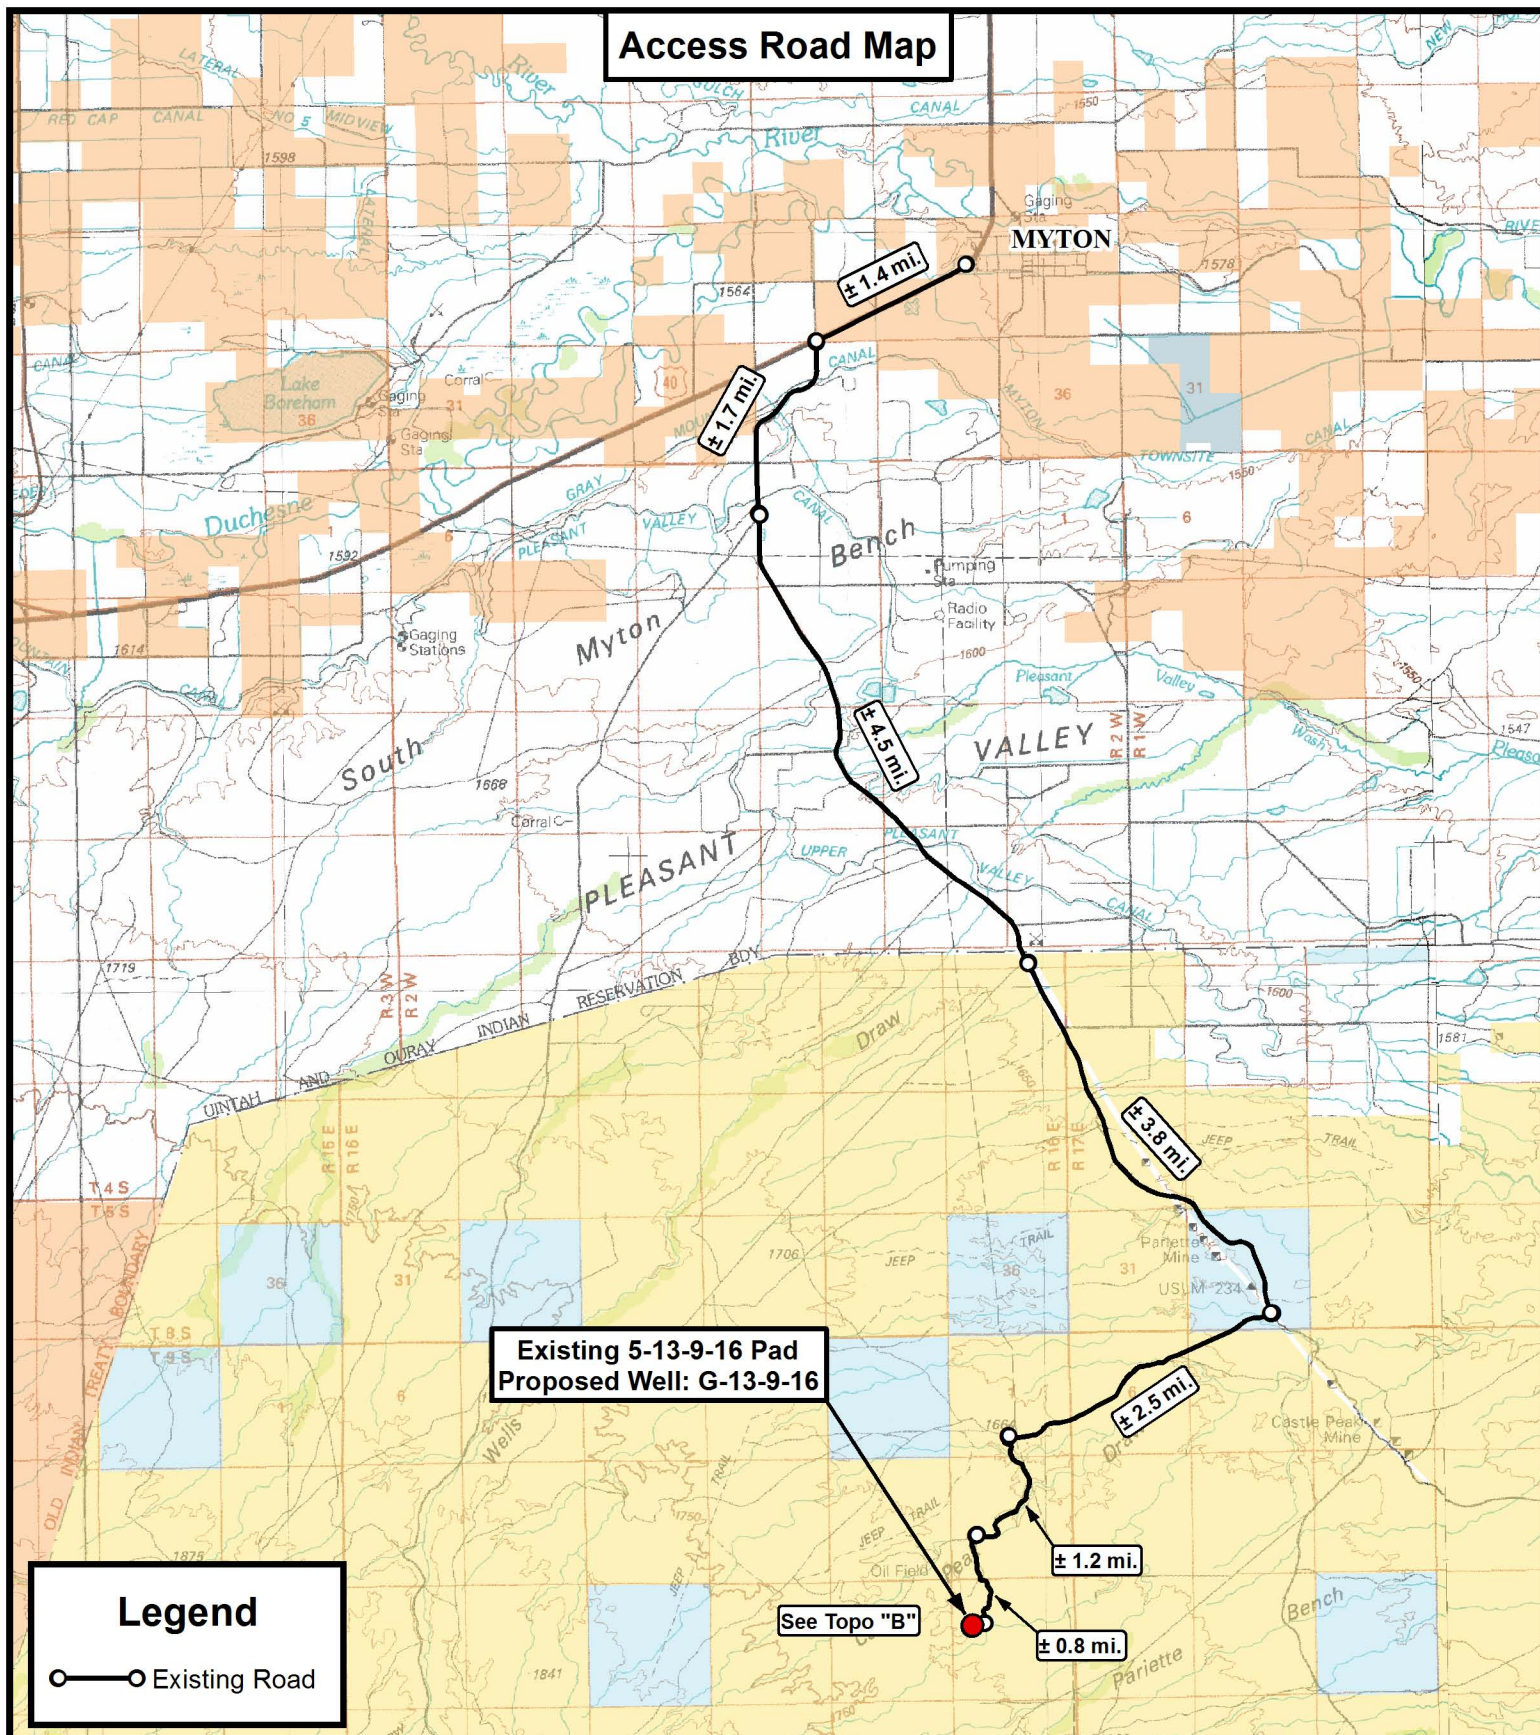

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518

DRAWN BY:	A.P.C.	REVISED:	VERSION:
DATE:	10-22-2013		V1
SCALE:	1:100,000		


**NEWFIELD EXPLORATION COMPANY**

Existing 5-13-9-16 Pad
Proposed Well: G-13-9-16
Sec. 13, T9S, R16E, S.L.B.&M.
Duchesne County, UT.

TOPOGRAPHIC MAP

SHEET

A

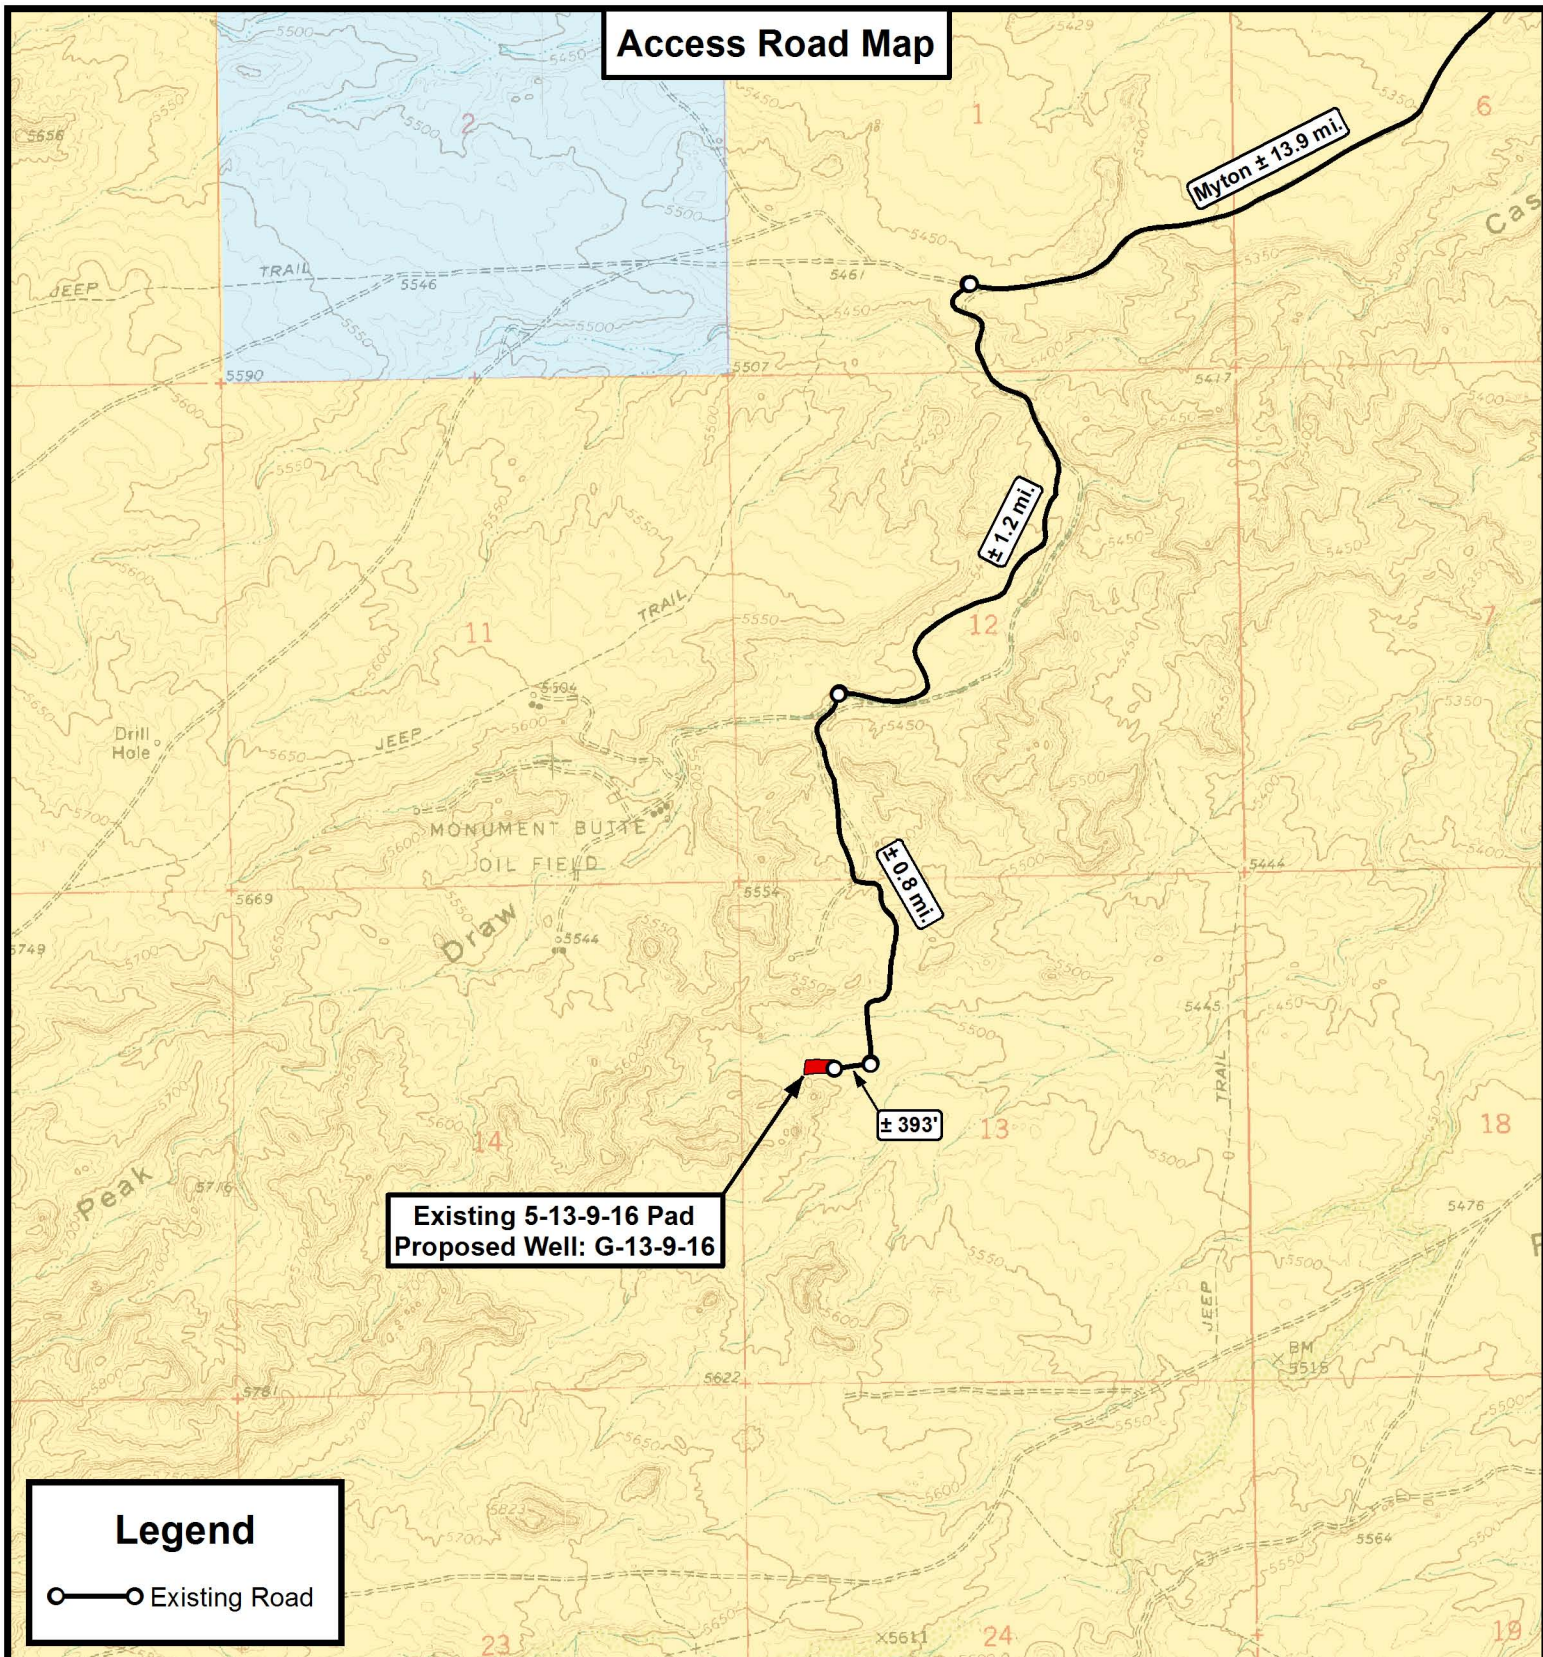

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



Tri State
Land Surveying, Inc.

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

Existing 5-13-9-16 Pad
Proposed Well: G-13-9-16
Sec. 13, T9S, R16E, S.L.B.&M.
Duchesne County, UT.


DRAWN BY:	A.P.C.	REVISED:	VERSION:
DATE:	10-22-2013		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET

B

Proposed Pipeline Map

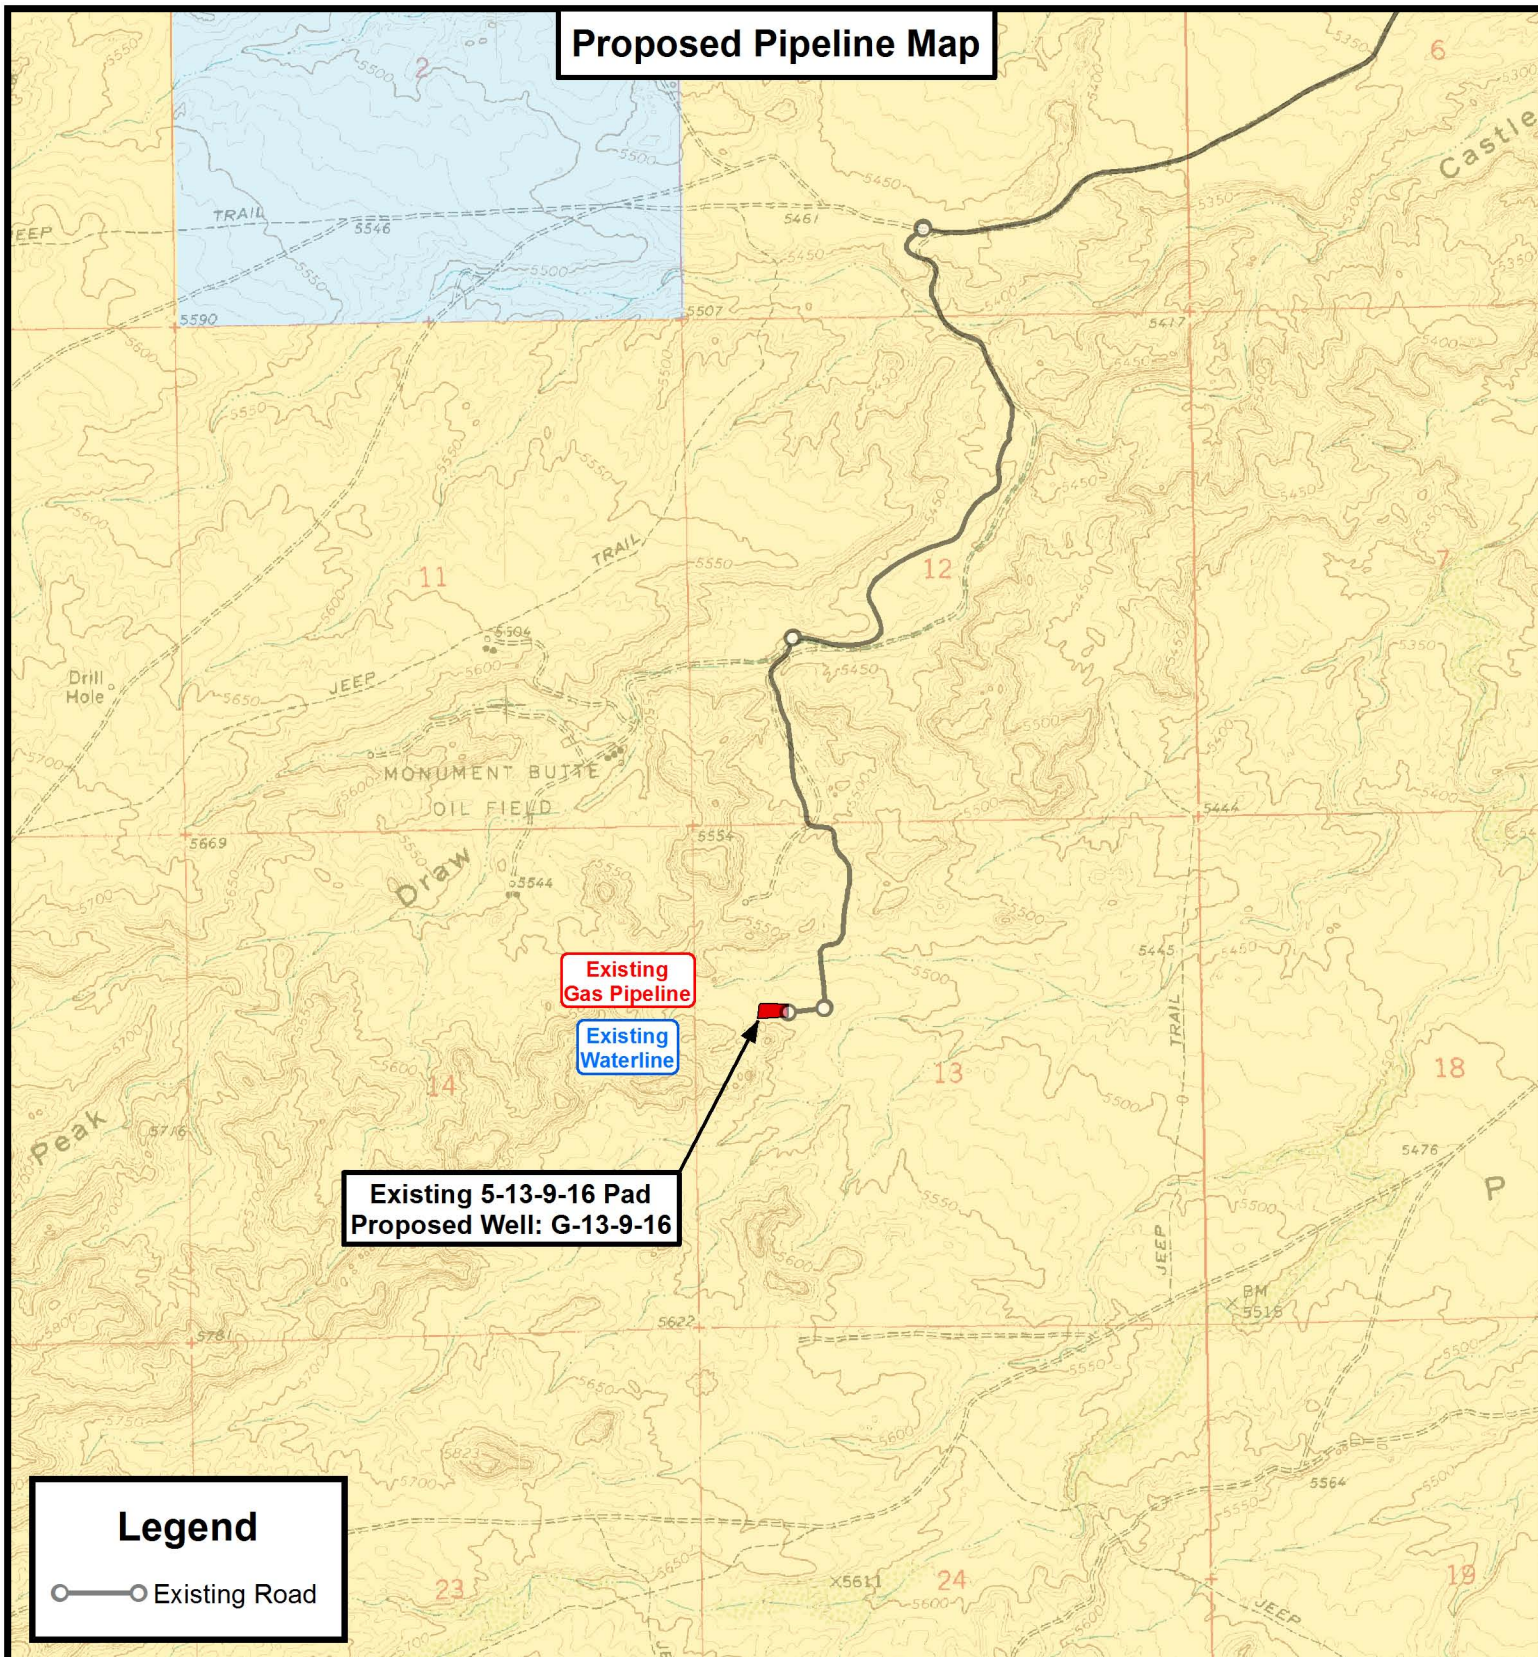

Legend

Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



**Tri State
Land Surveying, Inc.**

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

Existing 5-13-9-16 Pad
Proposed Well: G-13-9-16
Sec. 13, T9S, R16E, S.L.B.&M.
Duchesne County, UT.

DRAWN BY:	A.P.C.	REVISED:	VERSION:
DATE:	10-22-2013		V1
SCALE:	1" = 2,000'		


TOPOGRAPHIC MAP

SHEET

C

Exhibit "B" Map

Existing 5-13-9-16 Pad
Proposed Well: G-13-9-16

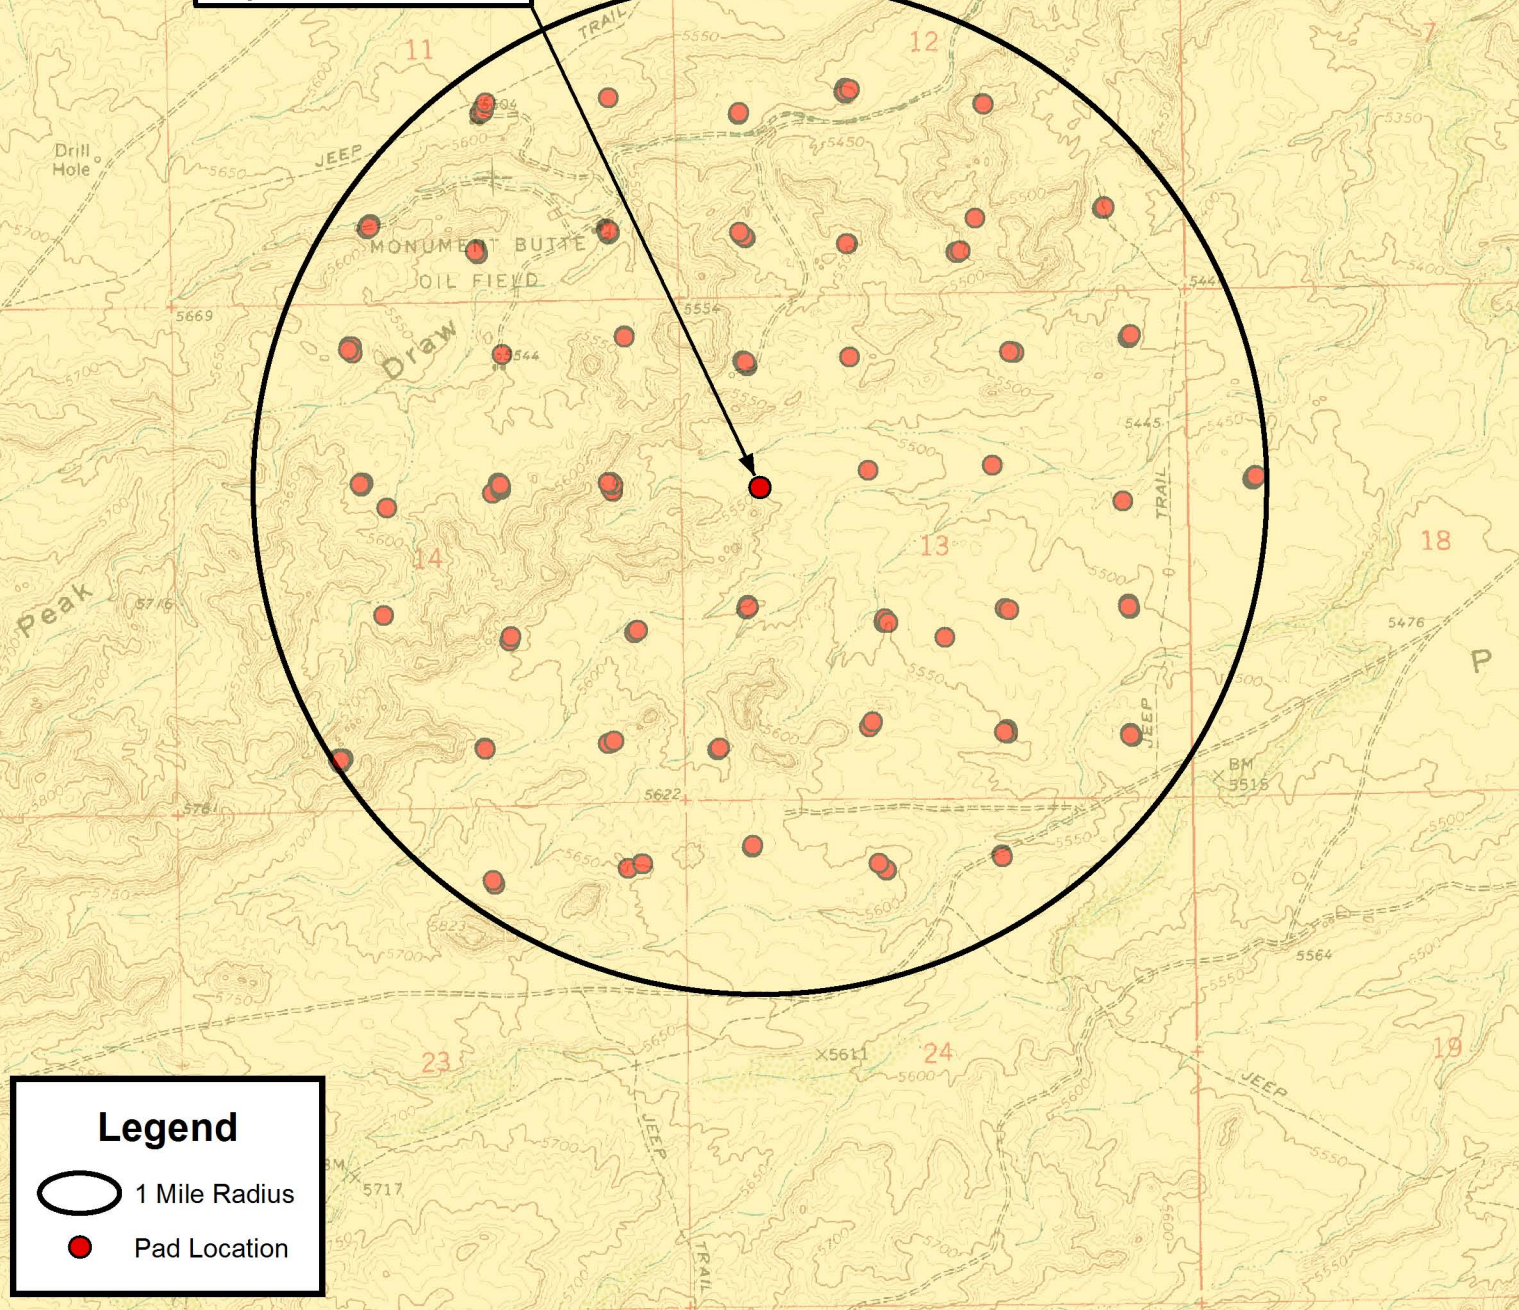**Legend**

- 1 Mile Radius
● Pad Location

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518

**NEWFIELD EXPLORATION COMPANY**

Existing 5-13-9-16 Pad
Proposed Well: G-13-9-16
Sec. 13, T9S, R16E, S.L.B.&M.
Duchesne County, UT.

DRAWN BY:	A.P.C.	REVISED:	VERSION:
DATE:	10-22-2013		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET

D

Coordinate Report

Well Number	Feature Type	Latitude (NAD 83) (DMS)	Longitude (NAD 83) (DMS)
5-13-9-16	Surface Hole	40° 01' 57.49" N	110° 04' 27.45" W
G-13-9-16	Surface Hole	40° 01' 57.64" N	110° 04' 27.25" W
G-13-9-16	Center of Pattern	40° 02' 04.58" N	110° 04' 21.17" W
G-13-9-16	Bottom of Hole	40° 02' 06.68" N	110° 04' 19.34" W
Well Number	Feature Type	Latitude (NAD 83) (DD)	Longitude (NAD 83) (DD)
5-13-9-16	Surface Hole	40.032637	110.074290
G-13-9-16	Surface Hole	40.032678	110.074237
G-13-9-16	Center of Pattern	40.034607	110.072548
G-13-9-16	Bottom of Hole	40.035189	110.072038
Well Number	Feature Type	Northing (NAD 83) (UTM Meters)	Longitude (NAD 83) (UTM Meters)
5-13-9-16	Surface Hole	4431790.054	578981.265
G-13-9-16	Surface Hole	4431794.690	578985.767
G-13-9-16	Center of Pattern	4432010.198	579127.651
G-13-9-16	Bottom of Hole	4432075.268	579170.490
Well Number	Feature Type	Latitude (NAD 27) (DMS)	Longitude (NAD 27) (DMS)
5-13-9-16	Surface Hole	40° 01' 57.63" N	110° 04' 24.90" W
G-13-9-16	Surface Hole	40° 01' 57.78" N	110° 04' 24.71" W
G-13-9-16	Center of Pattern	40° 02' 04.72" N	110° 04' 18.63" W
G-13-9-16	Bottom of Hole	40° 02' 06.81" N	110° 04' 16.80" W
Well Number	Feature Type	Latitude (NAD 27) (DD)	Longitude (NAD 27) (DD)
5-13-9-16	Surface Hole	40.032674	110.073584
G-13-9-16	Surface Hole	40.032716	110.073531
G-13-9-16	Center of Pattern	40.034644	110.071842
G-13-9-16	Bottom of Hole	40.035226	110.071332
Well Number	Feature Type	Northing (NAD 27) (UTM Meters)	Longitude (NAD 27) (UTM Meters)
5-13-9-16	Surface Hole	4431584.728	579043.539
G-13-9-16	Surface Hole	4431589.363	579048.041
G-13-9-16	Center of Pattern	4431804.872	579189.925
G-13-9-16	Bottom of Hole	4431869.942	579232.764



**Tri State
Land Surveying, Inc.**

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518

NEWFIELD EXPLORATION COMPANY

Existing 5-13-9-16 Pad
Proposed Well: G-13-9-16
Sec. 13, T9S, R16E, S.L.B.&M.
Duchesne County, UT.

DRAWN BY: A.P.C.
DATE: 10-22-2013
VERSION: V1

REVISED:

COORDINATE REPORT

SHEET

1

RECEIVED: February 24, 2014



NEWFIELD EXPLORATION

**USGS Myton SW (UT)
SECTION 13 T9S, R16E
G-13-9-16**

Wellbore #1

Plan: Design #1

Standard Planning Report

09 October, 2013





Payzone Directional Planning Report



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well G-13-9-16
Company:	NEWFIELD EXPLORATION	TVD Reference:	G-13-9-16 @ 5552.0ft (Original Well Elev)
Project:	USGS Myton SW (UT)	MD Reference:	G-13-9-16 @ 5552.0ft (Original Well Elev)
Site:	SECTION 13 T9S, R16E	North Reference:	True
Well:	G-13-9-16	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		

Site	SECTION 13 T9S, R16E			
Site Position:		Northing:	7,185,208.05 ft	Latitude: 40° 2' 11.060 N
From:	Lat/Long	Easting:	2,042,221.25 ft	Longitude: 110° 3' 53.490 W
Position Uncertainty:	0.0 ft	Slot Radius:	"	Grid Convergence: 0.92 °

Well	G-13-9-16, SHL LAT: 40 01 57.64 LONG: -110 04 27.25			
Well Position	+N/-S	-1,358.0 ft	Northing:	7,183,808.37 ft
	+E/-W	-2,625.7 ft	Easting:	2,039,617.57 ft
Position Uncertainty	0.0 ft	Wellhead Elevation:	5,552.0 ft	Ground Level: 5,542.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	10/9/2013	11.02	65.72	52,033

Design	Design #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.0	0.0	0.0	33.04

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,450.0	12.75	33.04	1,443.0	79.0	51.4	1.50	1.50	0.00	33.04	
4,861.1	12.75	33.04	4,770.0	710.0	461.8	0.00	0.00	0.00	0.00	G-13-9-16 TGT
6,019.7	12.75	33.04	5,900.0	924.4	601.3	0.00	0.00	0.00	0.00	



Payzone Directional

Planning Report



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well G-13-9-16
Company:	NEWFIELD EXPLORATION	TVD Reference:	G-13-9-16 @ 5552.0ft (Original Well Elev)
Project:	USGS Myton SW (UT)	MD Reference:	G-13-9-16 @ 5552.0ft (Original Well Elev)
Site:	SECTION 13 T9S, R16E	North Reference:	True
Well:	G-13-9-16	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	1.50	33.04	700.0	1.1	0.7	1.3	1.50	1.50	0.00
800.0	3.00	33.04	799.9	4.4	2.9	5.2	1.50	1.50	0.00
900.0	4.50	33.04	899.7	9.9	6.4	11.8	1.50	1.50	0.00
1,000.0	6.00	33.04	999.3	17.5	11.4	20.9	1.50	1.50	0.00
1,100.0	7.50	33.04	1,098.6	27.4	17.8	32.7	1.50	1.50	0.00
1,200.0	9.00	33.04	1,197.5	39.4	25.6	47.0	1.50	1.50	0.00
1,300.0	10.50	33.04	1,296.1	53.6	34.9	64.0	1.50	1.50	0.00
1,400.0	12.00	33.04	1,394.2	70.0	45.5	83.5	1.50	1.50	0.00
1,450.0	12.75	33.04	1,443.0	79.0	51.4	94.2	1.50	1.50	0.00
1,500.0	12.75	33.04	1,491.8	88.2	57.4	105.2	0.00	0.00	0.00
1,600.0	12.75	33.04	1,589.3	106.7	69.4	127.3	0.00	0.00	0.00
1,700.0	12.75	33.04	1,686.8	125.2	81.4	149.4	0.00	0.00	0.00
1,800.0	12.75	33.04	1,784.4	143.7	93.5	171.4	0.00	0.00	0.00
1,900.0	12.75	33.04	1,881.9	162.2	105.5	193.5	0.00	0.00	0.00
2,000.0	12.75	33.04	1,979.4	180.7	117.5	215.6	0.00	0.00	0.00
2,100.0	12.75	33.04	2,077.0	199.2	129.6	237.6	0.00	0.00	0.00
2,200.0	12.75	33.04	2,174.5	217.7	141.6	259.7	0.00	0.00	0.00
2,300.0	12.75	33.04	2,272.0	236.2	153.6	281.8	0.00	0.00	0.00
2,400.0	12.75	33.04	2,369.6	254.7	165.7	303.9	0.00	0.00	0.00
2,500.0	12.75	33.04	2,467.1	273.2	177.7	325.9	0.00	0.00	0.00
2,600.0	12.75	33.04	2,564.6	291.7	189.7	348.0	0.00	0.00	0.00
2,700.0	12.75	33.04	2,662.2	310.2	201.8	370.1	0.00	0.00	0.00
2,800.0	12.75	33.04	2,759.7	328.7	213.8	392.1	0.00	0.00	0.00
2,900.0	12.75	33.04	2,857.2	347.2	225.8	414.2	0.00	0.00	0.00
3,000.0	12.75	33.04	2,954.8	365.7	237.9	436.3	0.00	0.00	0.00
3,100.0	12.75	33.04	3,052.3	384.2	249.9	458.3	0.00	0.00	0.00
3,200.0	12.75	33.04	3,149.8	402.7	261.9	480.4	0.00	0.00	0.00
3,300.0	12.75	33.04	3,247.4	421.2	274.0	502.5	0.00	0.00	0.00
3,400.0	12.75	33.04	3,344.9	439.7	286.0	524.6	0.00	0.00	0.00
3,500.0	12.75	33.04	3,442.5	458.2	298.0	546.6	0.00	0.00	0.00
3,600.0	12.75	33.04	3,540.0	476.7	310.1	568.7	0.00	0.00	0.00
3,700.0	12.75	33.04	3,637.5	495.2	322.1	590.8	0.00	0.00	0.00
3,800.0	12.75	33.04	3,735.1	513.7	334.1	612.8	0.00	0.00	0.00
3,900.0	12.75	33.04	3,832.6	532.2	346.2	634.9	0.00	0.00	0.00
4,000.0	12.75	33.04	3,930.1	550.7	358.2	657.0	0.00	0.00	0.00
4,100.0	12.75	33.04	4,027.7	569.2	370.2	679.0	0.00	0.00	0.00
4,200.0	12.75	33.04	4,125.2	587.7	382.3	701.1	0.00	0.00	0.00
4,300.0	12.75	33.04	4,222.7	606.2	394.3	723.2	0.00	0.00	0.00
4,400.0	12.75	33.04	4,320.3	624.7	406.3	745.3	0.00	0.00	0.00
4,500.0	12.75	33.04	4,417.8	643.2	418.4	767.3	0.00	0.00	0.00
4,600.0	12.75	33.04	4,515.3	661.7	430.4	789.4	0.00	0.00	0.00
4,700.0	12.75	33.04	4,612.9	680.2	442.4	811.5	0.00	0.00	0.00
4,800.0	12.75	33.04	4,710.4	698.7	454.5	833.5	0.00	0.00	0.00
4,861.1	12.75	33.04	4,770.0	710.0	461.8	847.0	0.00	0.00	0.00
4,900.0	12.75	33.04	4,807.9	717.2	466.5	855.6	0.00	0.00	0.00
5,000.0	12.75	33.04	4,905.5	735.7	478.6	877.7	0.00	0.00	0.00
5,100.0	12.75	33.04	5,003.0	754.2	490.6	899.7	0.00	0.00	0.00



Payzone Directional

Planning Report



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well G-13-9-16
Company:	NEWFIELD EXPLORATION	TVD Reference:	G-13-9-16 @ 5552.0ft (Original Well Elev)
Project:	USGS Myton SW (UT)	MD Reference:	G-13-9-16 @ 5552.0ft (Original Well Elev)
Site:	SECTION 13 T9S, R16E	North Reference:	True
Well:	G-13-9-16	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,200.0	12.75	33.04	5,100.5	772.7	502.6	921.8	0.00	0.00	0.00
5,300.0	12.75	33.04	5,198.1	791.2	514.7	943.9	0.00	0.00	0.00
5,400.0	12.75	33.04	5,295.6	809.7	526.7	966.0	0.00	0.00	0.00
5,500.0	12.75	33.04	5,393.1	828.2	538.7	988.0	0.00	0.00	0.00
5,600.0	12.75	33.04	5,490.7	846.7	550.8	1,010.1	0.00	0.00	0.00
5,700.0	12.75	33.04	5,588.2	865.2	562.8	1,032.2	0.00	0.00	0.00
5,800.0	12.75	33.04	5,685.7	883.7	574.8	1,054.2	0.00	0.00	0.00
5,900.0	12.75	33.04	5,783.3	902.2	586.9	1,076.3	0.00	0.00	0.00
6,000.0	12.75	33.04	5,880.8	920.7	598.9	1,098.4	0.00	0.00	0.00
6,019.7	12.75	33.04	5,900.0	924.4	601.3	1,102.7	0.00	0.00	0.00

API Well Number: 43013528680000





Project: USGS Myton SW (UT)
 Site: SECTION 13 T9S, R16E
 Well: G-13-9-16
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.02°

Magnetic Field
 Strength: 52032.9snT
 Dip Angle: 65.72°
 Date: 10/9/2013
 Model: IGRF2010

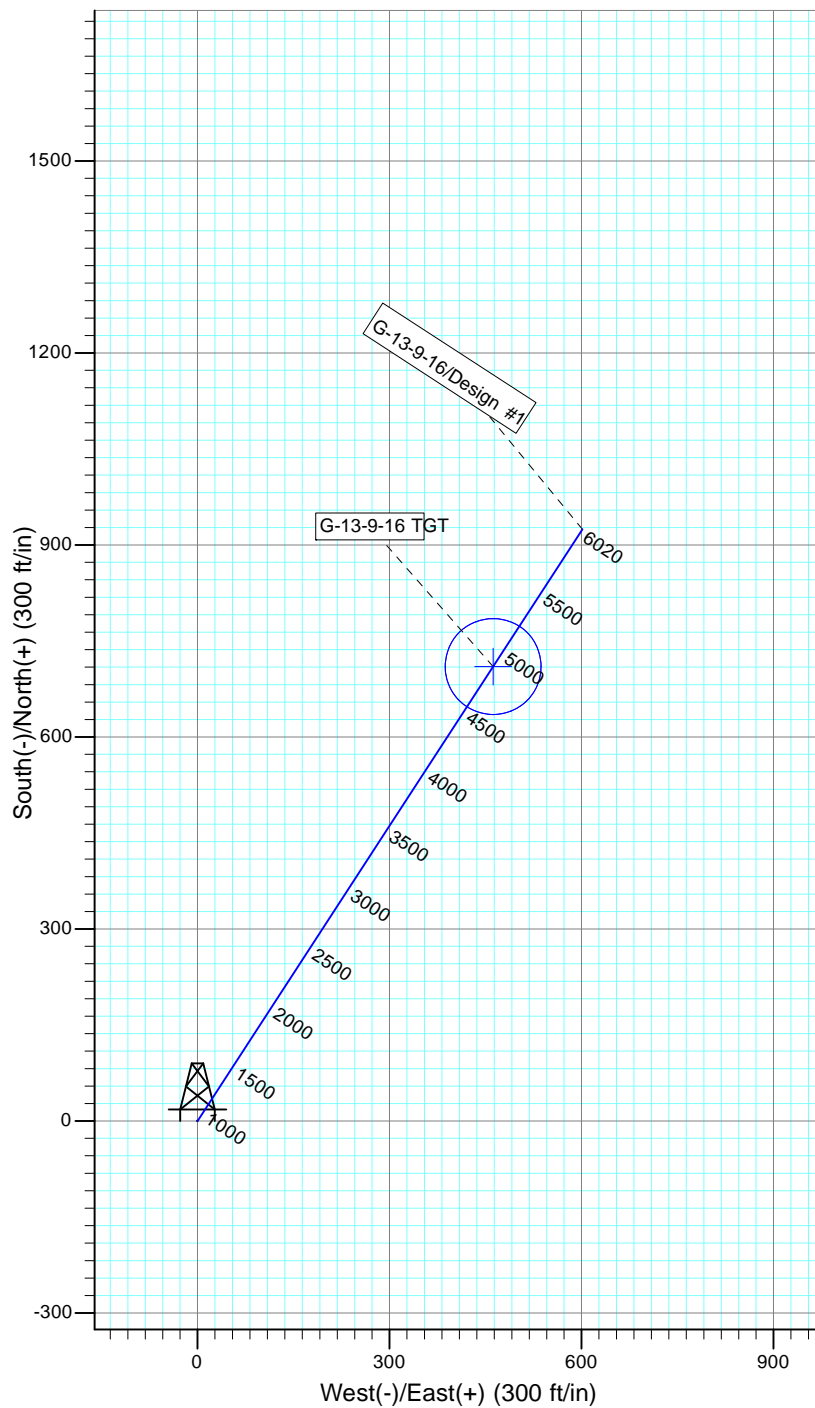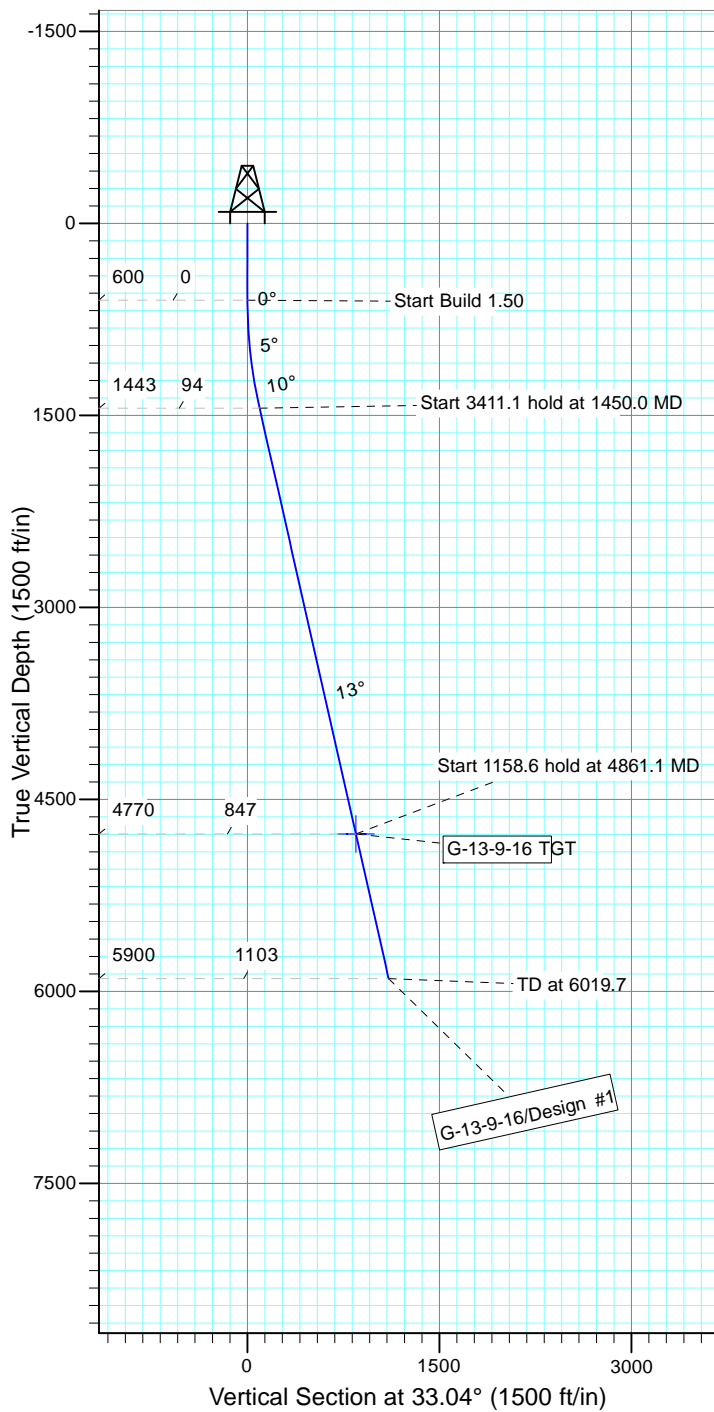

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
G-13-9-16 TGT	4770.0	710.0	461.8	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1450.0	12.75	33.04	1443.0	79.0	51.4	1.50	33.04	94.2	
4	4861.1	12.75	33.04	4770.0	710.0	461.8	0.00	0.00	847.0	G-13-9-16 TGT
5	6019.7	12.75	33.04	5900.0	924.4	601.3	0.00	0.00	1102.7	



**NEWFIELD PRODUCTION COMPANY
GMBU G-13-9-16
AT SURFACE: SW/NW SECTION 13, T9S R16E
DUCHESNE COUNTY, UTAH**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site GMBU G-13-9-16 located in the SW 1/4 NW 1/4 Section 13, T9S, R16E, Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 – 1.4 miles \pm to the junction of this highway and UT State Hwy 53; proceed in a southeasterly direction – 10.0 miles \pm to it's junction with an existing road to the west; proceed in a westerly direction – 2.5 miles \pm to it's junction with an existing road to the south; proceed in a southwesterly direction – 1.2 miles \pm to it's junction with an existing road to the south; proceed in a southerly direction – 0.8 miles \pm to it's junction with the beginning of the access road to the existing 5-13-9-16 well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

There is no proposed access road for this location. The proposed well will be drilled directionally off of the existing 5-13-9-16 well pad. See attached **Topographic Map "B"**.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District
Water Right : 43-7478

Maurice Harvey Pond
Water Right: 47-1358

Neil Moon Pond
Water Right: 43-11787

Newfield Collector Well
Water Right: 47-1817 (A30414DVA, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

8. **ANCILLARY FACILITIES**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT**

See attached Location Layout Sheet.

Fencing Requirements

- a) All pits will be fenced or have panels installed consistent with the following minimum standards:
 1. The wire shall be no more than two (2) inches above the ground. If barbed wire is utilized it will be installed three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
 2. Corner posts shall be centered and/or braced in such a manner to keep tight and upright at all times
 3. Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

- a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

- b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP** – Bureau of Land Management.

12. **OTHER ADDITIONAL INFORMATION**

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. MOAC Report # 13-358 12/17/13, prepared by Montgomery Archaeological Consultants. . Paleontological Resource Survey prepared by Wade E Miller, Report dated 12/3/13.

Water Disposal

After first production, if the production water meets quality guidelines, it will be transported to the Ashley, Monument Butte, Jonah, South Wells Draw and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project. Water not meeting quality criteria, will be disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), Federally approved surface disposal facilities or at a State of Utah approved surface disposal facilities.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the GMBU G-13-9-16, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the GMBU G-13-9-16, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

13. LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:

Representative

Name: Corie Miller
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification


Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #G-13-9-16, Section 13, Township 9S, Range 16E: Lease UTU-64805 Duchesne County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #WYB000493.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

2/20/14
Date

Heather Calder
Regulatory Technician
Newfield Production Company

Typical 2M BOP stack configuration

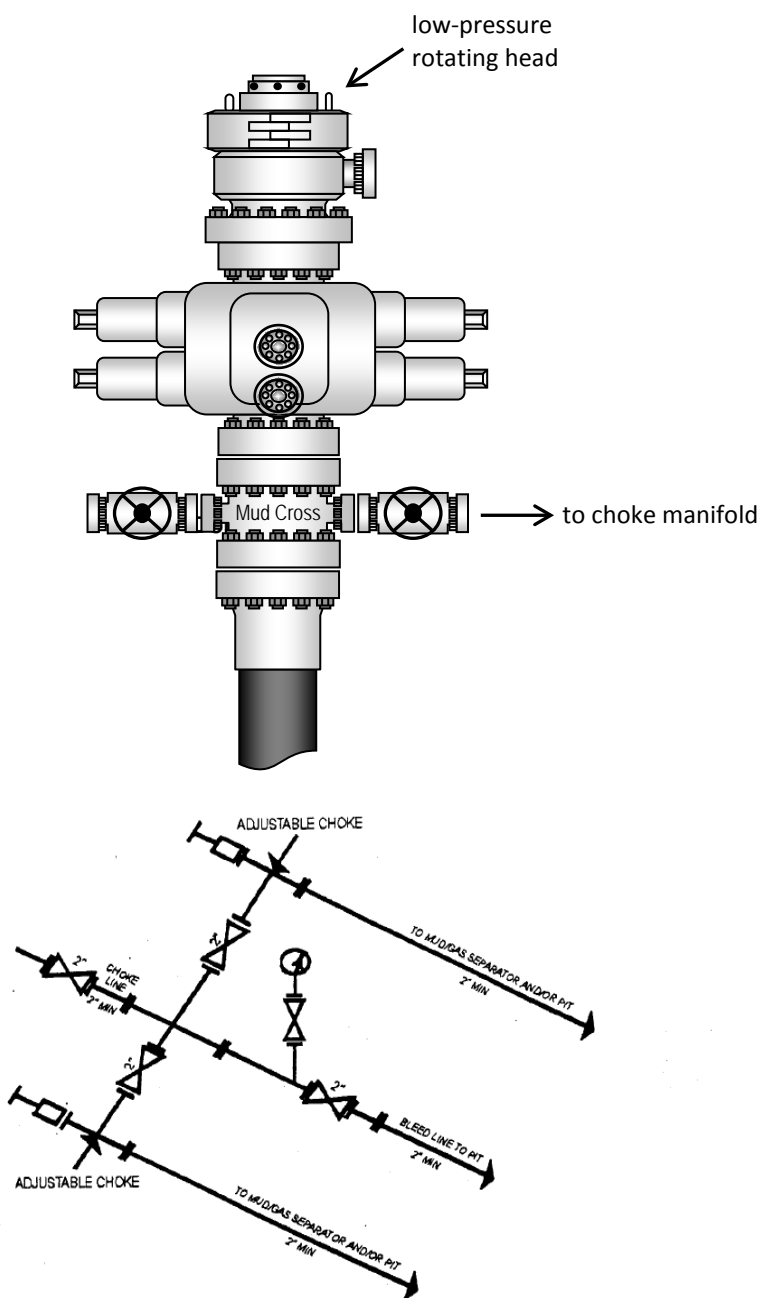

2M CHOKE MANIFOLD EQUIPMENT - CONFIGURATION OF CHOKES MAY VARY


NEWFIELD EXPLORATION COMPANY

WELL PAD INTERFERENCE PLAT

EXISTING 5-13-9-16 PAD

PROPOSED WELL: G-13-9-16

Pad Location: SWNW Section 13, T9S, R16E, S.L.B.&M.



Note:

Bearings are based
on GPS Observations.

*LATITUDE & LONGITUDE
Surface Position of Wells (NAD 83)*

WELL	LATITUDE	LONGITUDE
5-13-9-16	40° 01' 57.49"	110° 04' 27.45"
G-13-9-16	40° 01' 57.64"	110° 04' 27.25"

*LATITUDE & LONGITUDE
Center of Pattern (NAD 83)*

WELL	LATITUDE	LONGITUDE
G-13-9-16	40° 02' 04.58"	110° 04' 21.17"

*LATITUDE & LONGITUDE
Bottom Hole Position (NAD 83)*


WELL	LATITUDE	LONGITUDE
G-13-9-16	40° 02' 06.68"	110° 04' 19.34"

*RELATIVE COORDINATES
From Top Hole to C.O.P.*

WELL	NORTH	EAST
G-13-9-16	710'	462'

*RELATIVE COORDINATES
From Top Hole to Bottom Hole*

WELL	NORTH	EAST
G-13-9-16	924'	601'

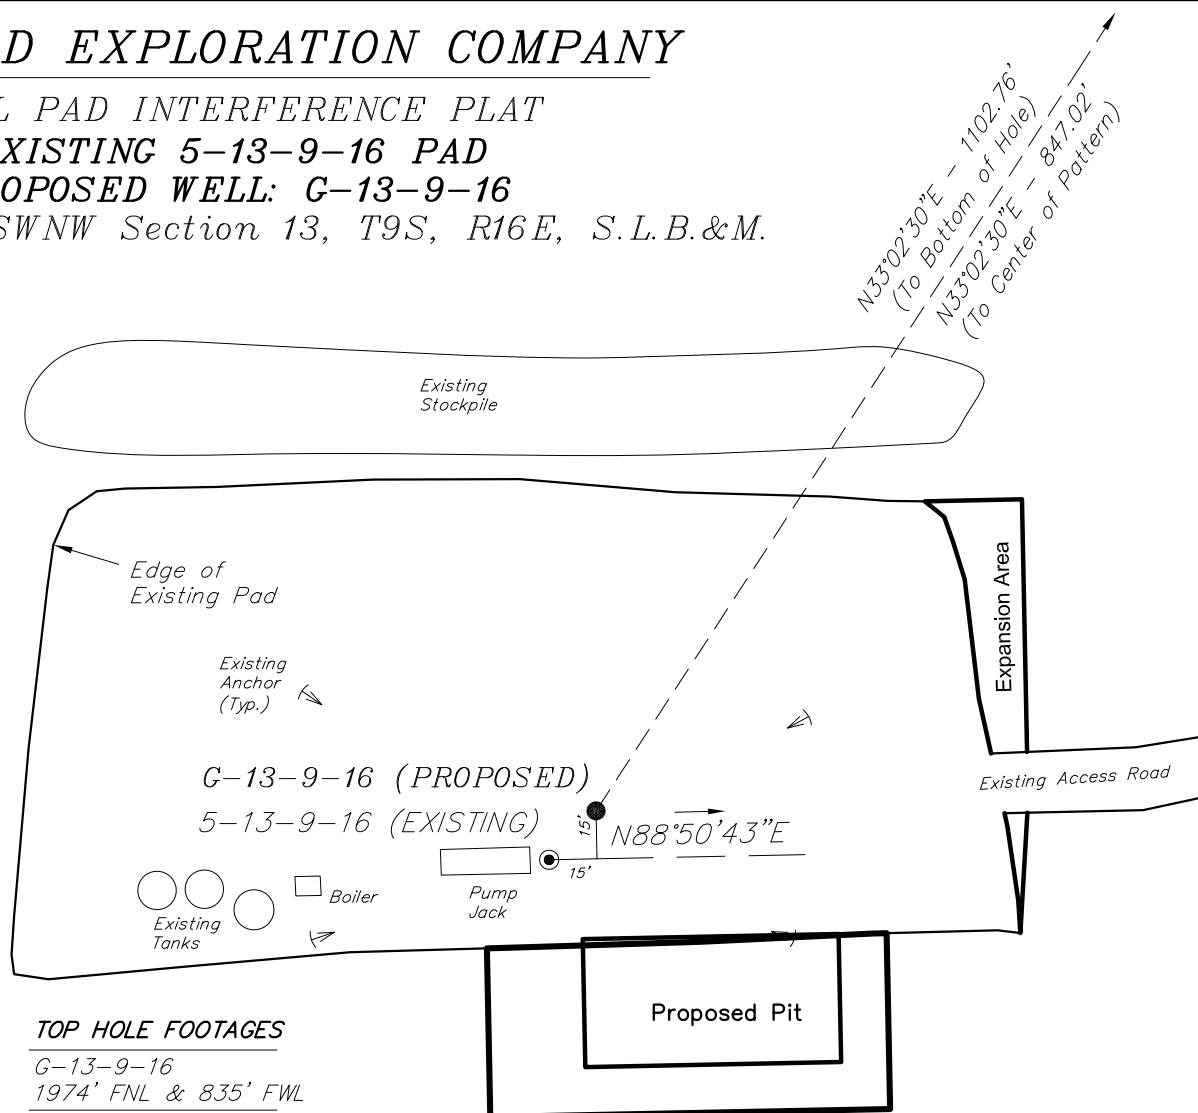

TOP HOLE FOOTAGES

G-13-9-16
1974' FNL & 835' FWL

**CENTER OF
PATTERN FOOTAGES**

G-13-9-16
1271' FNL & 1309' FWL

BOTTOM HOLE FOOTAGES


G-13-9-16
1059' FNL & 1452' FWL

SURVEYED BY: S.V.	DATE SURVEYED: 08-06-12	VERSION:
DRAWN BY: F.T.M.	DATE DRAWN: 10-21-13	V1
SCALE: 1" = 60'	REVISED:	





Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD EXPLORATION COMPANY**LOCATION LAYOUT****EXISTING 5-13-9-16 PAD****PROPOSED WELL: G-13-9-16**

Pad Location: SWNW Section 13, T9S, R16E, S.L.B.&M.

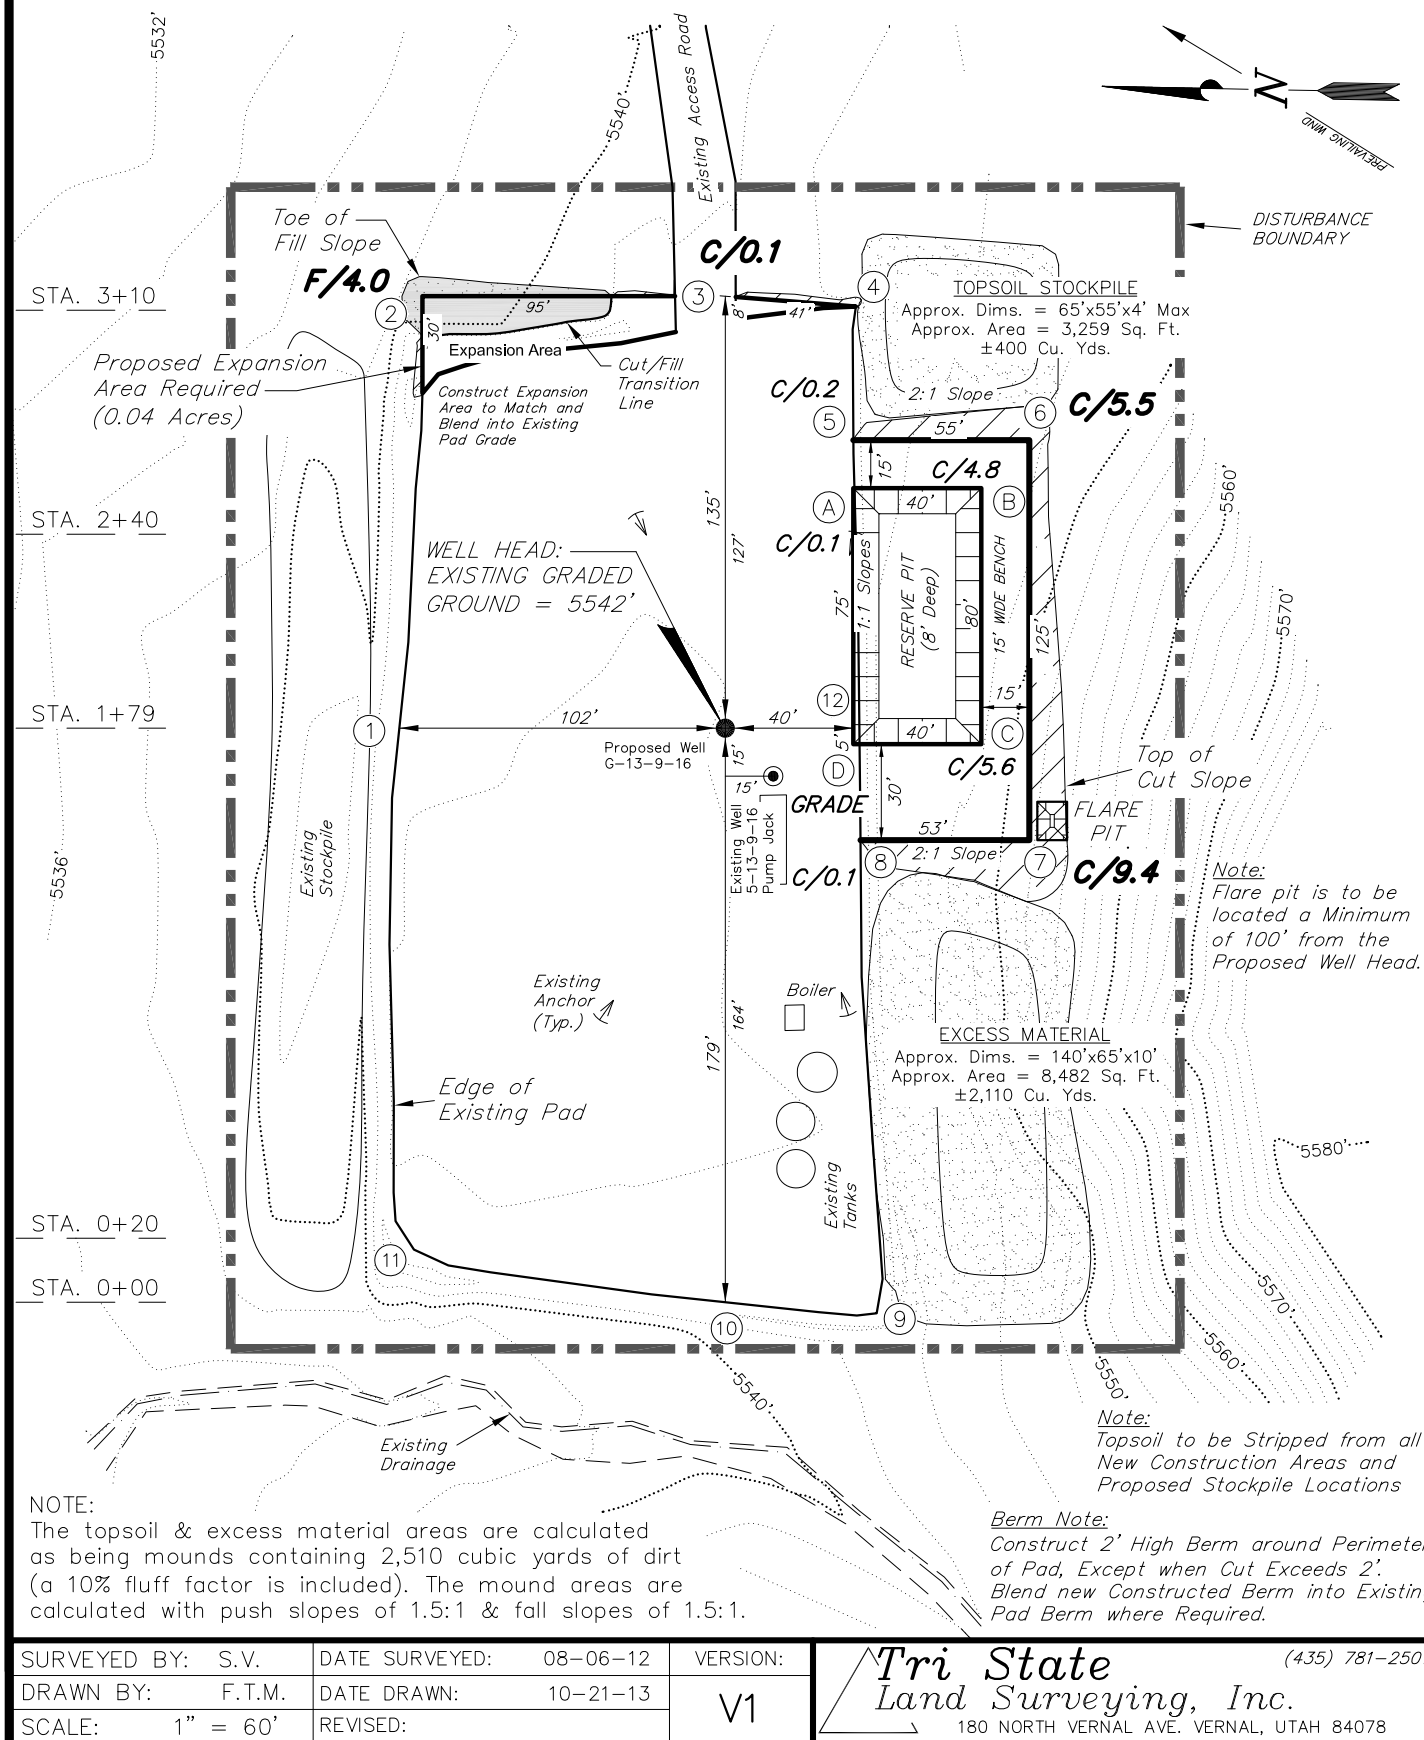

RECEIVED: February 24, 2014

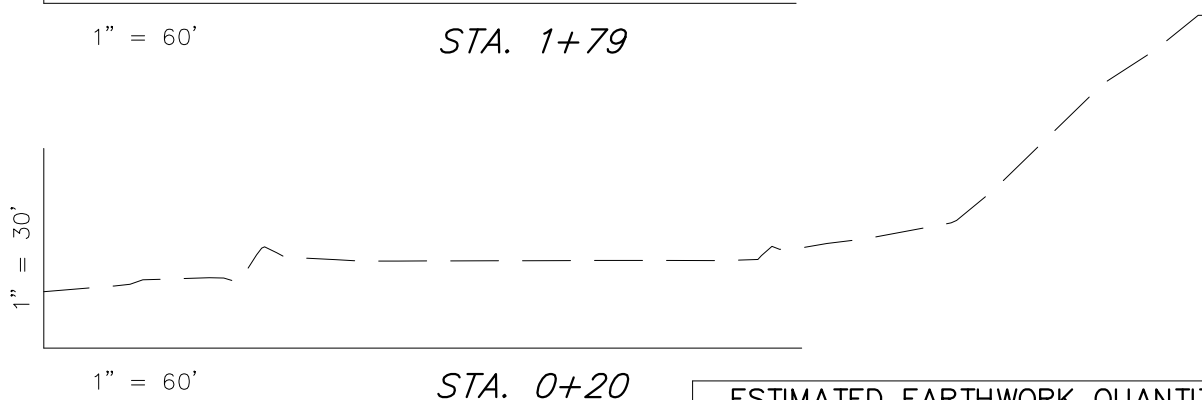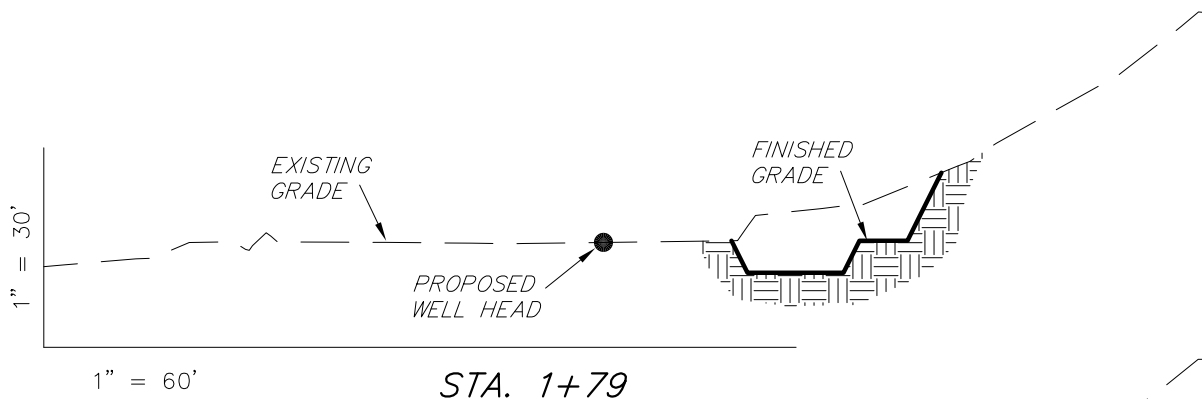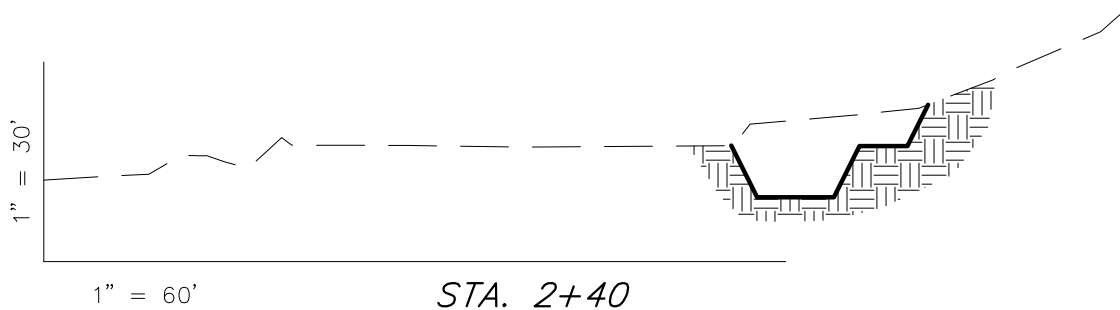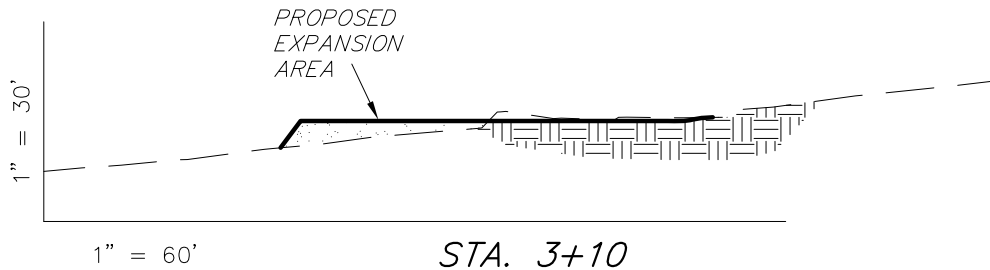NEWFIELD EXPLORATION COMPANY***CROSS SECTIONS
EXISTING 5-13-9-16 PAD
PROPOSED WELL: G-13-9-16****Pad Location: SWNW Section 13, T9S, R16E, S.L.B.&M.*

NOTE:
UNLESS OTHERWISE
NOTED ALL CUT/FILL
SLOPES ARE AT 1.5:1


ESTIMATED EARTHWORK QUANTITIES
(No Shrink or swell adjustments have been used)
(Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	1,300	70	Topsoil is not included in Pad Cut	1,230
PIT	690	0		690
TOTALS	1,990	70	370	1,920

SURVEYED BY: S.V.	DATE SURVEYED: 08-06-12	VERSION:
DRAWN BY: F.T.M.	DATE DRAWN: 10-21-13	V1
SCALE: 1" = 60'	REVISED:	

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078
(435) 781-2501

RECEIVED: February 24, 2014

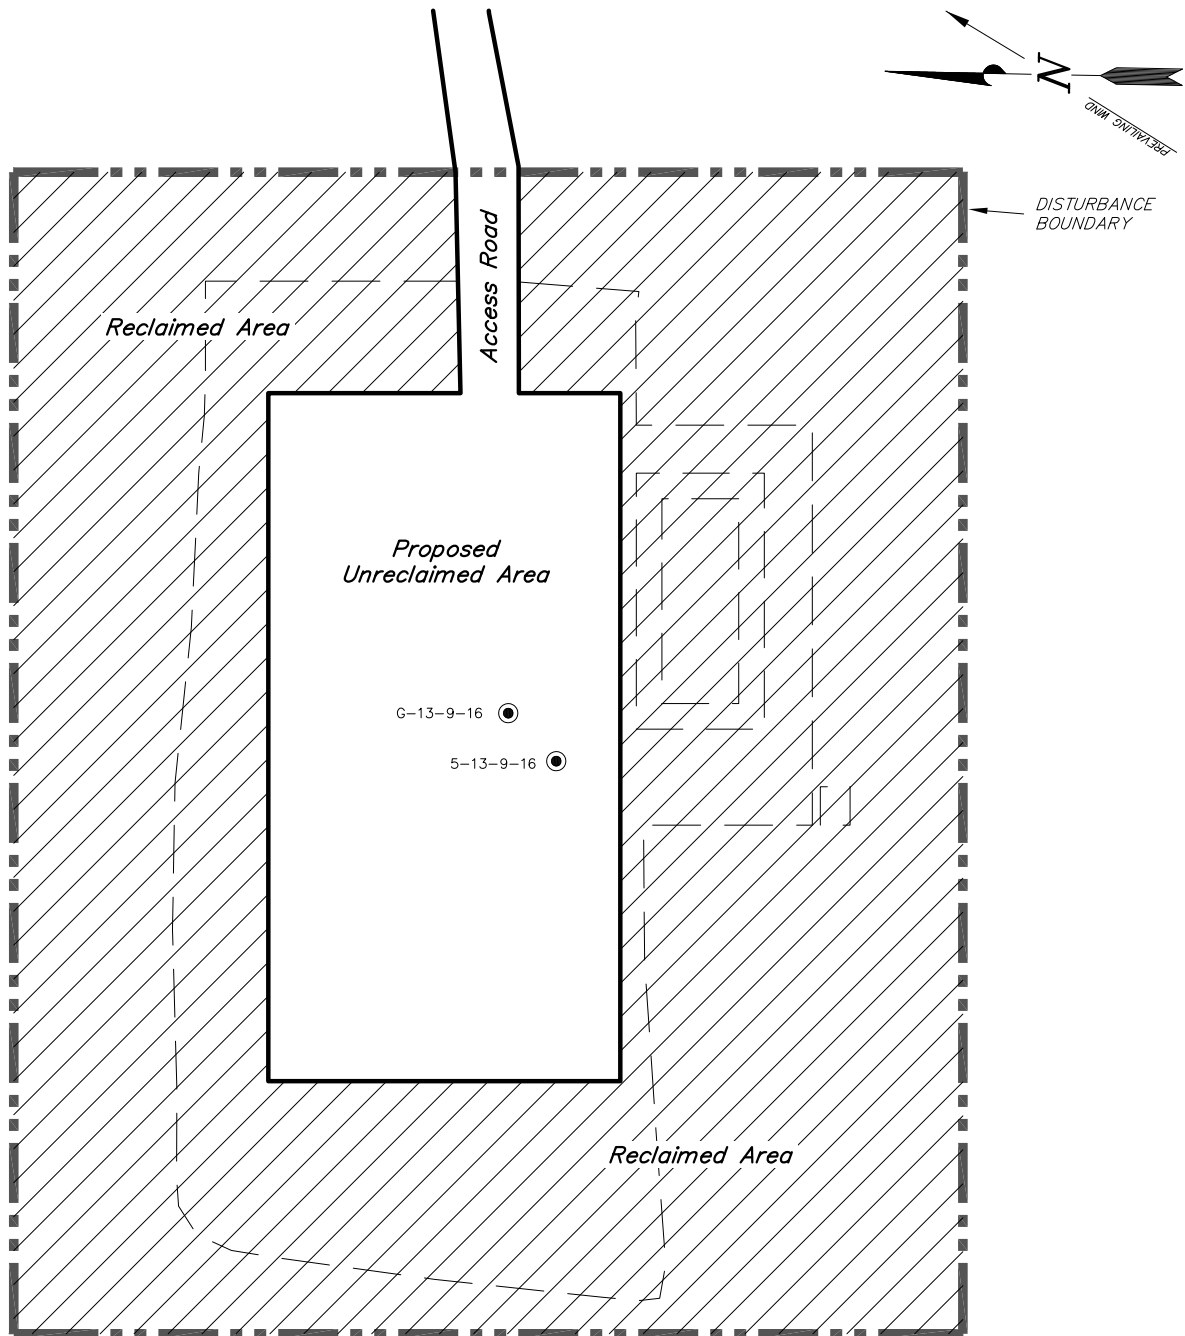NEWFIELD EXPLORATION COMPANY***RECLAMATION LAYOUT******EXISTING 5-13-9-16 PAD******PROPOSED WELL: G-13-9-16****Pad Location: SWNW Section 13, T9S, R16E, S.L.B.&M.***Notes:**

1. Reclaimed Area to Include Seeding of Approved Vegetation and Sufficient Storm Water Management System.
2. Actual Equipment Layout and Reclaimed Pad Surface Area May Change due to Production Requirements or Site Conditions.

DISTURBED AREA:

TOTAL DISTURBED AREA = ± 2.47 ACRES
 TOTAL RECLAIMED AREA = ± 1.90 ACRES
 UNRECLAIMED AREA = ± 0.57 ACRES


SURVEYED BY: S.V.	DATE SURVEYED: 08-06-12	VERSION:
DRAWN BY: F.T.M.	DATE DRAWN: 10-21-13	V1
SCALE: 1" = 60'	REVISED:	

Tri State (435) 781-2501
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

RECEIVED: February 24, 2014

NEWFIELD EXPLORATION COMPANY**PROPOSED SITE FACILITY DIAGRAM****5-13-9-16 PAD****5-13-9-16 UTU-64805****G-13-9-16 UTU-64805**

*Pad Location: SWNW Section 13, T9S, R16E, S.L.B.&M.
Duchesne County, Utah*

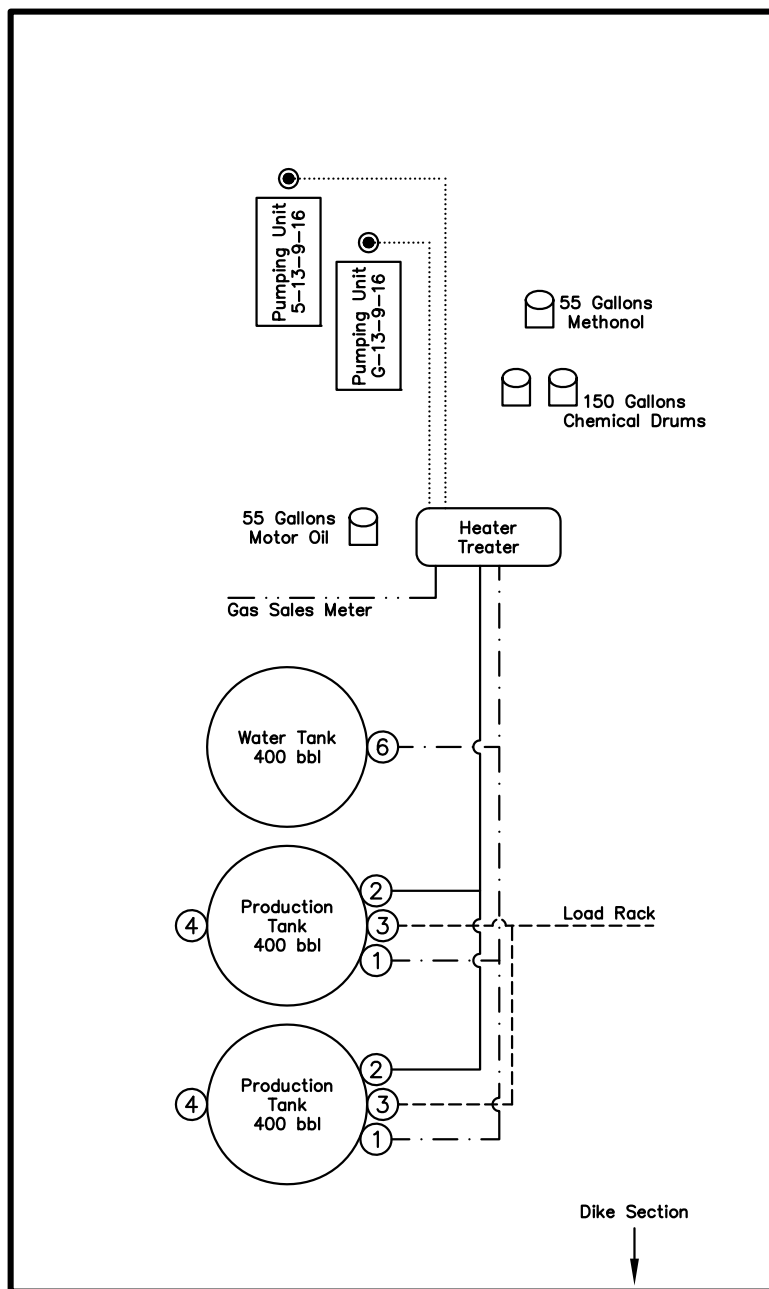**Legend**


Emulsion Line
 Load Rack - - - - -
 Water Line - . - . -
 Gas Sales - . . - . -
 Oil Line - - - - -

NOT TO SCALE

SURVEYED BY: S.V.	DATE SURVEYED: 08-06-12	VERSION:
DRAWN BY: F.T.M.	DATE DRAWN: 10-21-13	V1
SCALE: NONE	REVISED:	

Tri State (435) 781-2501
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

RECEIVED: February 24, 2014

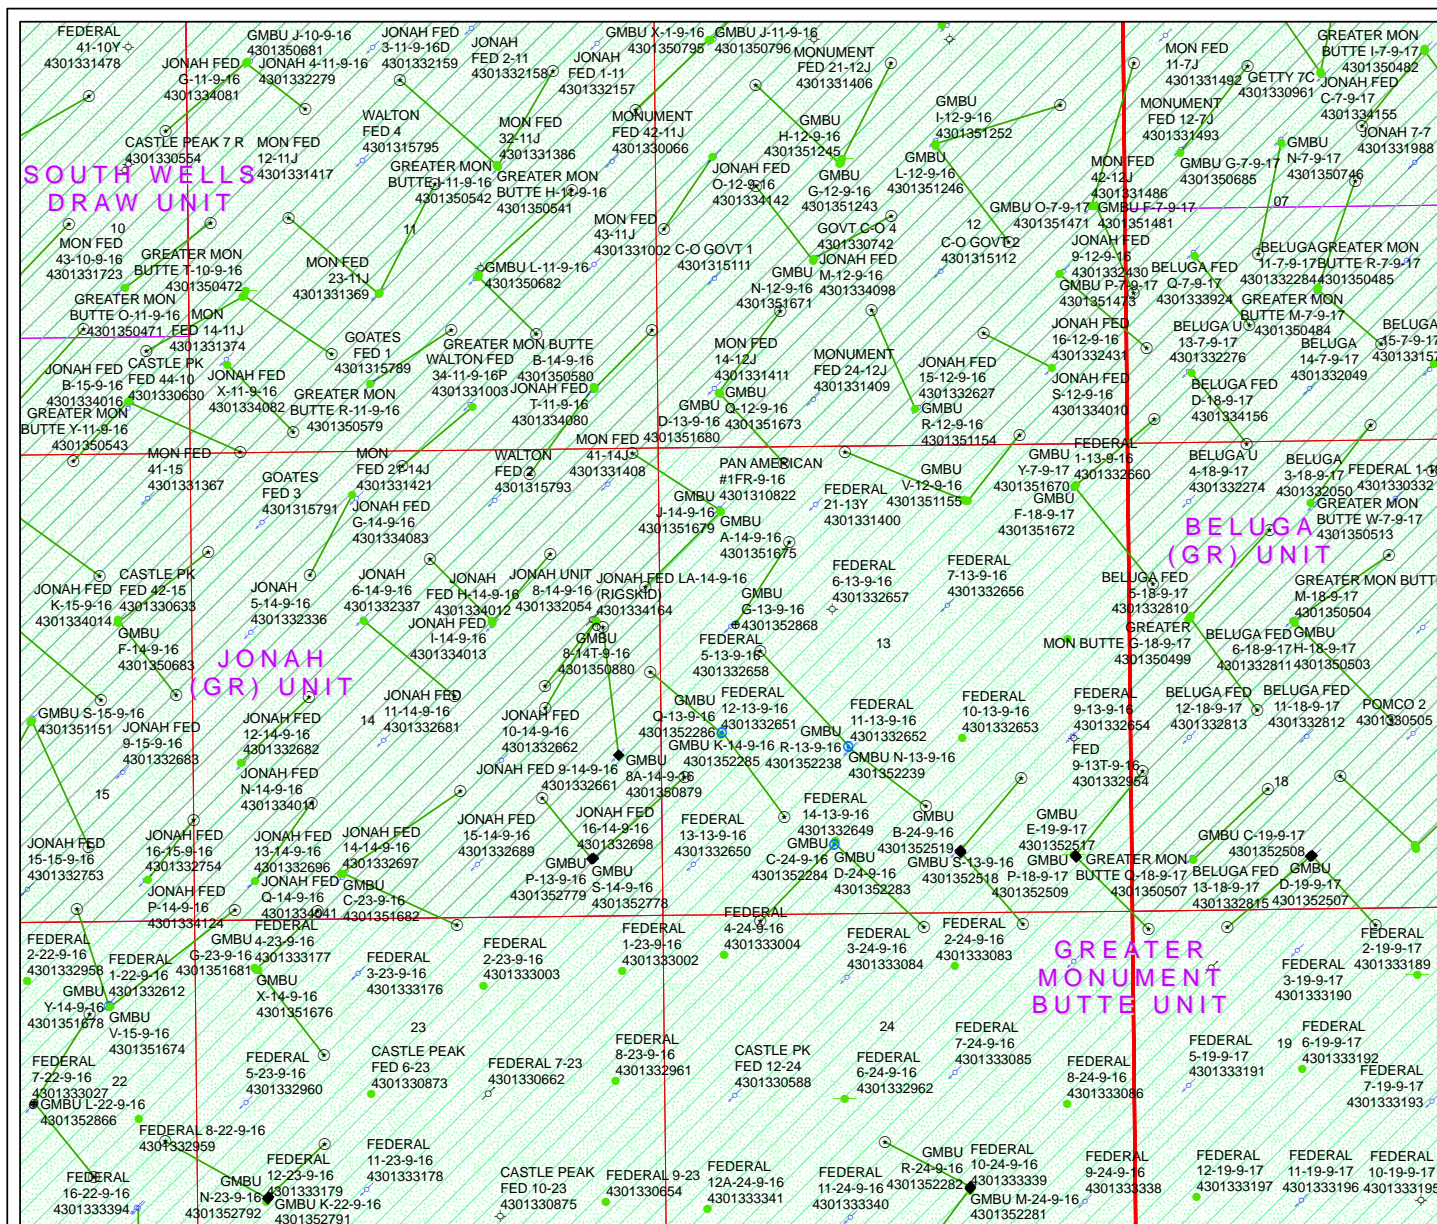

API Number: 4301352868



Well Name: GMBU G-13-9-16

Township: T09.0S Range: R16.0E Section: 13 Meridian: S

Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared: 2/27/2014
Map Produced by Diana Mason

Wells Query		Units	
Status		STATUS	
APD - Approved Permit		ACTIVE	
DRL - Spudded (Drilling Commenced)		EXPLORATORY	
GIW - Gas Injection		GAS STORAGE	
GS - Gas Storage		NF PP OIL	
LOC - New Location		NF SECONDARY	
OPS - Operation Suspended		PI OIL	
PA - Plugged Abandoned		PP GAS	
PGW - Producing Gas Well		PP GEOTHERMAL	
POW - Producing Oil Well		PP OIL	
SGW - Shut-In Gas Well		SECONDARY	
SGW - Shut-In Oil Well		TERMINATED	
TA - Temp. Abandoned			
TW - Test Well			
WOW - Water Disposal			
WWI - Water Injection Well			
WSW - Water Supply Well			

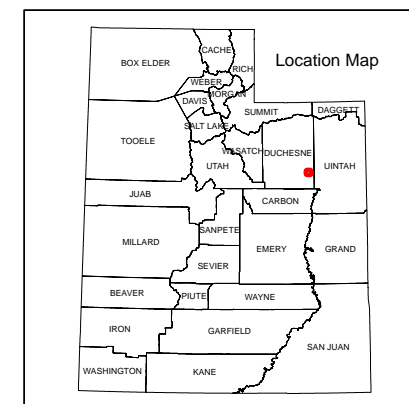

NEWFIELD



VIA ELECTRONIC DELIVERY

February 26, 2014

State of Utah, Division of Oil, Gas and Mining
ATTN: Diana Mason
P.O. Box 145801
Salt Lake City, UT 84114-5801

Newfield Exploration Company

1001 17th Street | Suite 2000
Denver, Colorado 80202
PH 303-893-0102 | FAX 303-893-0103

RE: Directional Drilling
GMBU G-13-9-16
Greater Monument Butte (Green River) Unit

Surface Hole: T9S-R16E Section 13: SWNW (UTU-64805)
1974' FNL 835' FWL

At Target: T9S-R16E Section 13: NENW (UTU-64805)
1059' FNL 1452' FWL

Duchesne County, Utah

Dear Ms. Mason:

Pursuant to the filing by Newfield Production Company (NPC) of an Application for Permit to Drill the above referenced well dated 2/24/14, a copy of which is attached, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole and target locations of this well are both within the boundaries of the Greater Monument Butte Unit (UTU-87538X), of which Newfield certifies that it is the operator. Further, Newfield certifies that all lands within 460 feet of the entire directional well bore are within the Greater Monument Butte Unit.

NPC is permitting this well as a directional well in order to mitigate surface disturbance by utilizing pre-existing roads and pipelines.

NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please contact the undersigned at 303-323-9770 or by email at ldein@newfield.com. Your consideration in this matter is greatly appreciated.

Sincerely,
Newfield Production Company

Levi Dein
Landman

Form 3160-3
(August 2007)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB No. 1004-0136
Expires July 31, 2010

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU64805
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator NEWFIELD EXPLORATION		7. If Unit or CA Agreement, Name and No. GMBU
Contact: HEATHER CALDER E-Mail: hcalder@newfield.com		8. Lease Name and Well No. GMBU G-13-9-16
3a. Address ROUTE 3 BOX 3630 MYTON, UT 84052	3b. Phone No. (include area code) Ph: 435-646-4936 Fx: 435-646-4936	9. API Well No.
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SWNW 1974FNL 835FWL At proposed prod. zone NENW 1059FNL 1452FWL		10. Field and Pool, or Exploratory MONUMENT BUTTE
14. Distance in miles and direction from nearest town or post office* 15.9 MILES SOUTH OF MYTON, UT		11. Sec., T., R., M., or Blk. and Survey or Area Sec 13 T9S R16E Mer SLB
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1059'	16. No. of Acres in Lease 560.00	12. County or Parish DUCHESNE
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 1554'	17. Spacing Unit dedicated to this well 20.00	13. State UT
21. Elevations (Show whether DF, KB, RT, GL, etc.) 5542 GL	19. Proposed Depth 6020 MD 5900 TVD	20. BLM/BIA Bond No. on file WYB000493
	22. Approximate date work will start 04/01/2014	23. Estimated duration 7 DAYS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|--|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature (Electronic Submission)	Name (Printed/Typed) HEATHER CALDER Ph: 435-646-4936	Date 02/24/2014
Title PRODUCTION TECHNICIAN		
Approved by (Signature)	Name (Printed/Typed)	Date
Title	Office	

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)


Electronic Submission #236467 verified by the BLM Well Information System
For NEWFIELD EXPLORATION, sent to the Vernal

** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED **

API Well Number: 43013528680000

Additional Operator Remarks:

SURFACE HOLE LEASE:UTU-64805
BOTTOM HOLE LEASE:UTU-64805

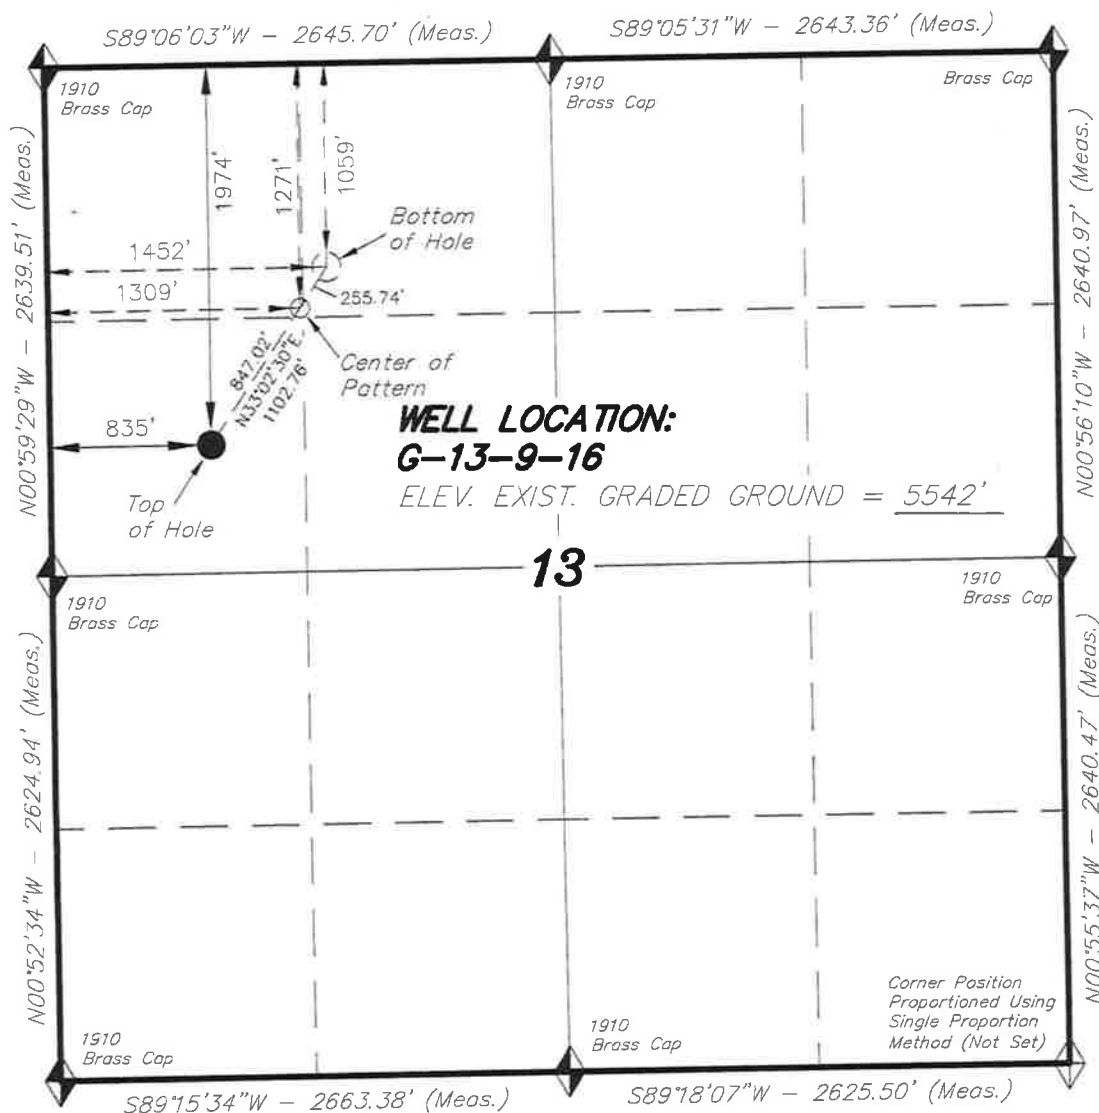T9S, R16E, S.L.B.&M.**NEWFIELD EXPLORATION COMPANY**

WELL LOCATION, G-13-9-16, LOCATED AS SHOWN IN THE SW 1/4 NW 1/4 OF SECTION 13, T9S, R16E, S.L.B.&M. DUCHESNE COUNTY, UTAH.


TARGET BOTTOM HOLE, G-13-9-16, LOCATED AS SHOWN IN THE NE 1/4 NW 1/4 OF SECTION 13, T9S, R16E, S.L.B.&M. DUCHESNE COUNTY, UTAH.

**NOTES:**

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.



THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

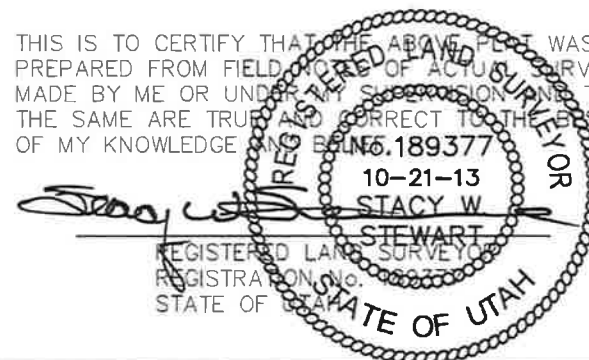

= SECTION CORNERS LOCATED


BASIS OF ELEV; Elevations are based on an N.G.S. OPUS Correction. LOCATION: LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

NAD 83 (SURFACE LOCATION)	
LATITUDE = 40°01'57.64"	
LONGITUDE = 110°04'27.25"	
NAD 27 (SURFACE LOCATION)	
LATITUDE = 40°01'57.78"	
LONGITUDE = 110°04'24.71"	
NAD 83 (CENTER OF PATTERN)	NAD 83 (BOTTOM HOLE LOCATION)
LATITUDE = 40°02'04.58"	LATITUDE = 40°02'06.68"
LONGITUDE = 110°04'21.17"	LONGITUDE = 110°04'19.34"
NAD 27 (CENTER OF PATTERN)	NAD 27 (BOTTOM HOLE LOCATION)
LATITUDE = 40°02'04.72"	LATITUDE = 40°02'06.81"
LONGITUDE = 110°04'18.63"	LONGITUDE = 110°04'16.80"

TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501

DATE SURVEYED: 08-06-12	SURVEYED BY: S.V.	VERSION:
DATE DRAWN: 10-21-13	DRAWN BY: V.H.	V1
REVISED:	SCALE: 1" = 1000'	

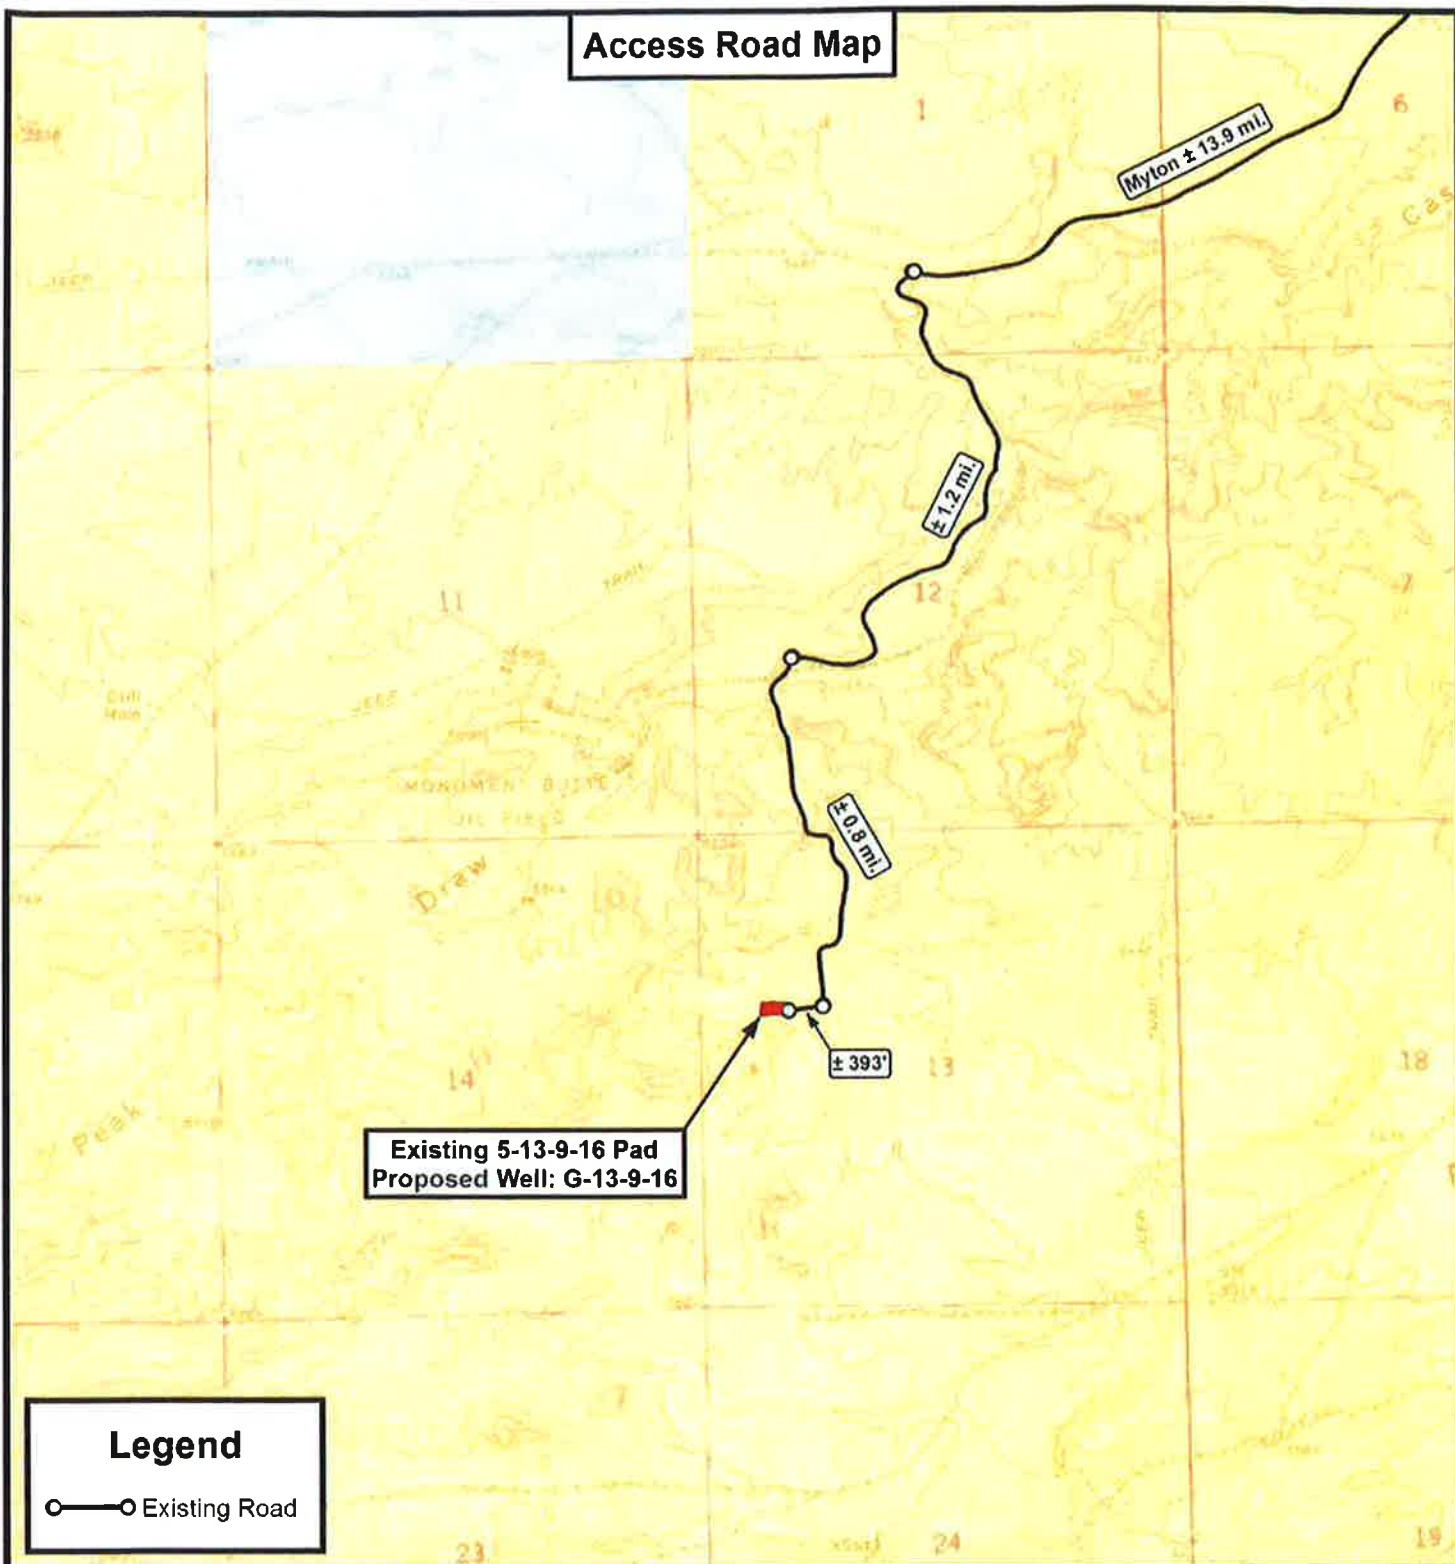

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

Existing 5-13-9-16 Pad
Proposed Well: G-13-9-16
Sec. 13, T9S, R16E, S.L.B.&M.
Duchesne County, UT.

DRAWN BY:	A.P.C.	REVISED:	VERSION:
DATE:	10-22-2013		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET

B

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
440 West 200 South, Suite 500
Salt Lake City, UT 84101

IN REPLY REFER TO:
3160
(UT-922)

March 3, 2014

Memorandum

To: Assistant Field Office Manager Minerals,
Vernal Field Office

From: Michael Coulthard, Petroleum Engineer

Subject: 2014 Plan of Development Greater Monument
Butte Unit, Duchesne and Uintah Counties,
Utah.

Pursuant to email between Diana Mason, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2014 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

API #	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-52856	GMBU K-23-9-15	Sec 24 T09S R15E 1960 FNL 0683 FWL BHL Sec 23 T09S R15E 2470 FSL 0317 FEL
43-013-52857	GMBU N-24-9-15	Sec 24 T09S R15E 1949 FNL 0701 FWL BHL Sec 24 T09S R15E 2424 FSL 1654 FWL
43-013-52858	GMBU B-17-9-16	Sec 08 T09S R16E 0393 FSL 0647 FEL BHL Sec 17 T09S R16E 0032 FNL 1557 FEL
43-013-52859	GMBU O-17-9-16	Sec 18 T09S R16E 2051 FSL 0440 FEL BHL Sec 17 T09S R16E 2628 FSL 0219 FWL
43-013-52860	GMBU P-17-9-16	Sec 18 T09S R16E 2047 FSL 0419 FEL BHL Sec 17 T09S R16E 1137 FSL 0298 FWL
43-013-52861	GMBU G-19-9-16	Sec 19 T09S R16E 1911 FNL 1854 FWL BHL Sec 19 T09S R16E 1117 FNL 1069 FWL


API #	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-52865	GMBU I-22-9-16	Sec 22 T09S R16E 2013 FNL 1823 FEL
	BHL	Sec 22 T09S R16E 1005 FNL 1175 FEL
43-013-52866	GMBU L-22-9-16	Sec 22 T09S R16E 1996 FNL 1810 FEL
	BHL	Sec 22 T09S R16E 2430 FSL 1144 FEL
43-013-52867	GMBU N-20-9-16	Sec 20 T09S R16E 2149 FSL 2167 FWL
	BHL	Sec 20 T09S R16E 2485 FNL 1051 FWL
43-013-52868	GMBU G-13-9-16	Sec 13 T09S R16E 1974 FNL 0835 FWL
	BHL	Sec 13 T09S R16E 1059 FNL 1452 FWL
43-013-52869	GMBU P-18-9-16	Sec 13 T09S R15E 2088 FSL 0506 FEL
	BHL	Sec 18 T09S R16E 1111 FSL 0157 FWL
43-047-54305	GMBU J-25-8-17	Sec 30 T08S R18E 0522 FNL 0652 FWL
	BHL	Sec 25 T08S R17E 1550 FNL 0123 FEL
43-047-54306	GMBU G-30-8-18	Sec 30 T08S R18E 0502 FNL 0658 FWL
	BHL	Sec 30 T08S R18E 1520 FNL 1479 FWL

This office has no objection to permitting the wells at this time.

API Well Number: 43013528680000





Project: USGS Myton SW (UT)
Site: SECTION 24 T9S, R15E
Well: K-23-9-15
Wellbore: Wellbore #1
Design: Design #1



Azimuths to True North
Magnetic North: 11.06°


Magnetic Field
Strength: 52000.4snT
Dip Angle: 65.69°
Date: 10/21/2013
Model: IGRF2010

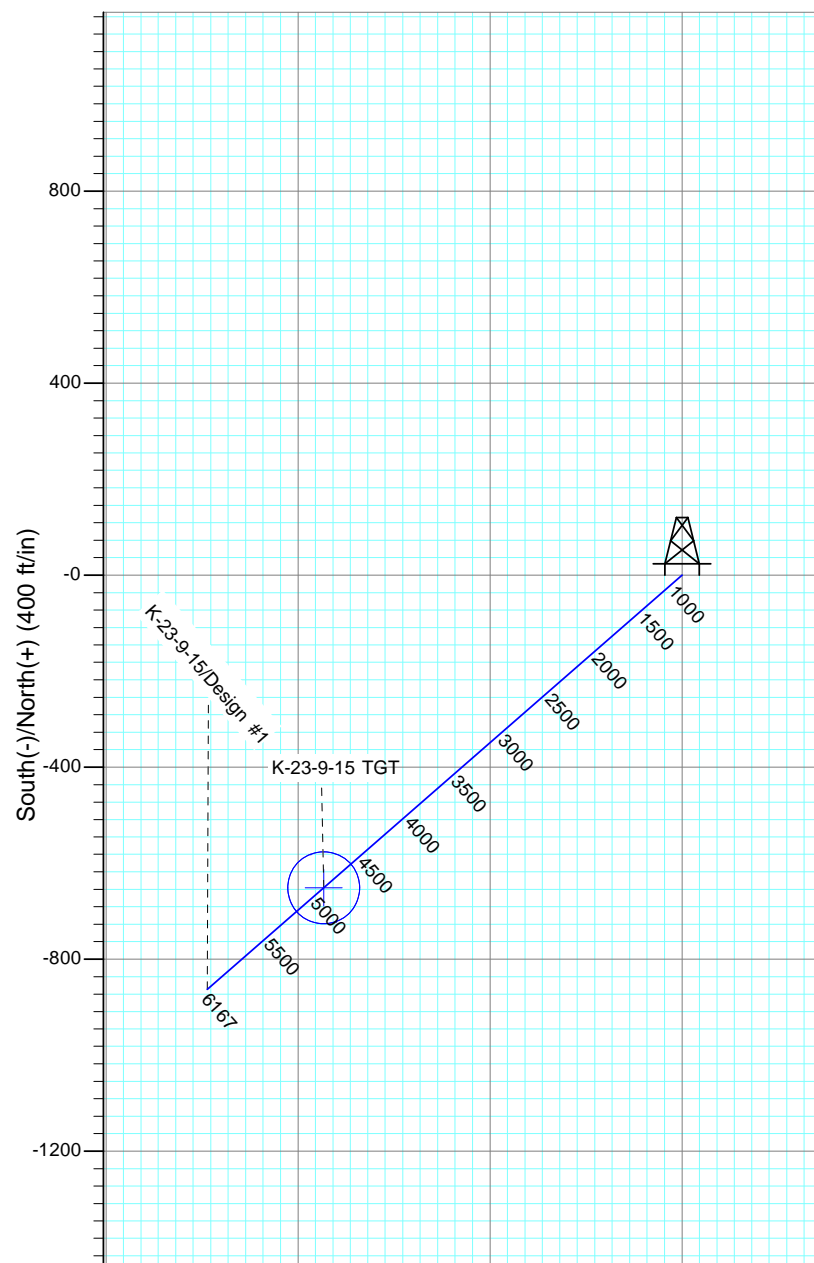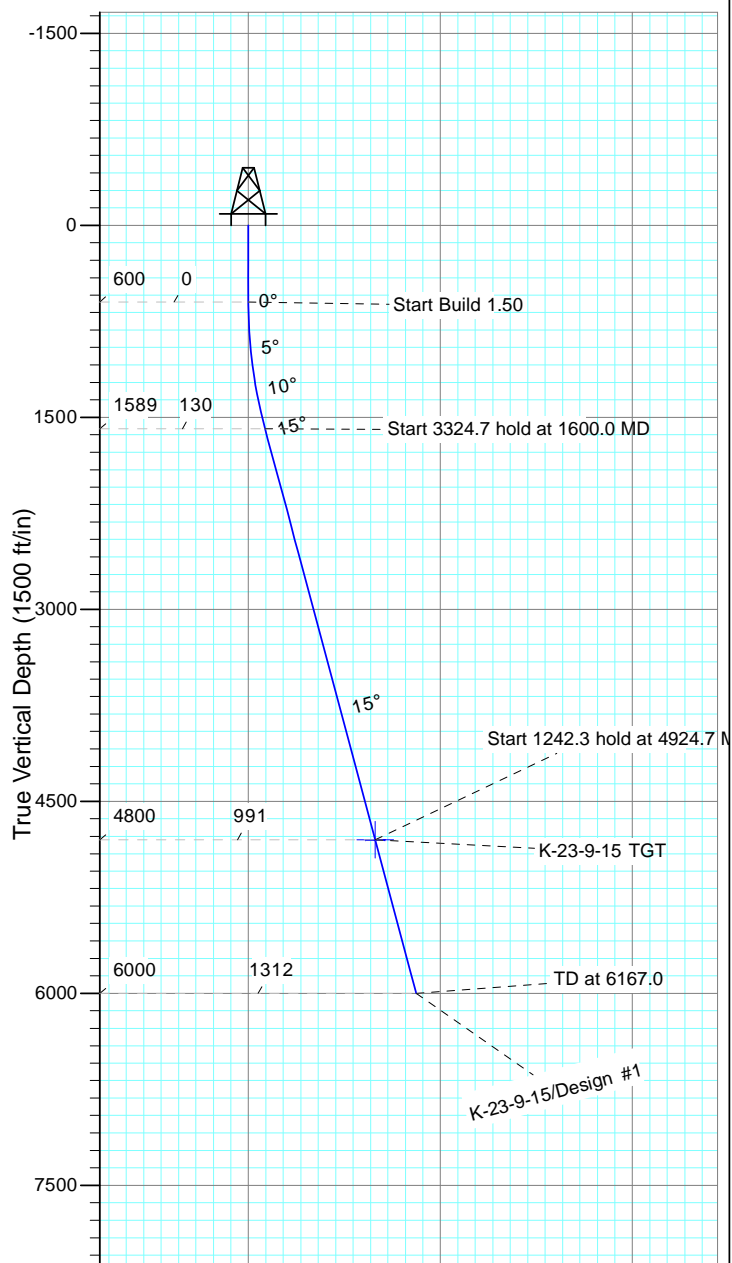

API Well Number: 43013528680000





Project: USGS Myton SW (UT)
Site: SECTION 24 T9S, R15E
Well: N-24-9-15
Wellbore: Wellbore #1
Design: Design #1



Azimuths to True North
Magnetic North: 11.06°


Magnetic Field
Strength: 52000.4snT
Dip Angle: 65.69°
Date: 10/21/2013
Model: IGRF2010

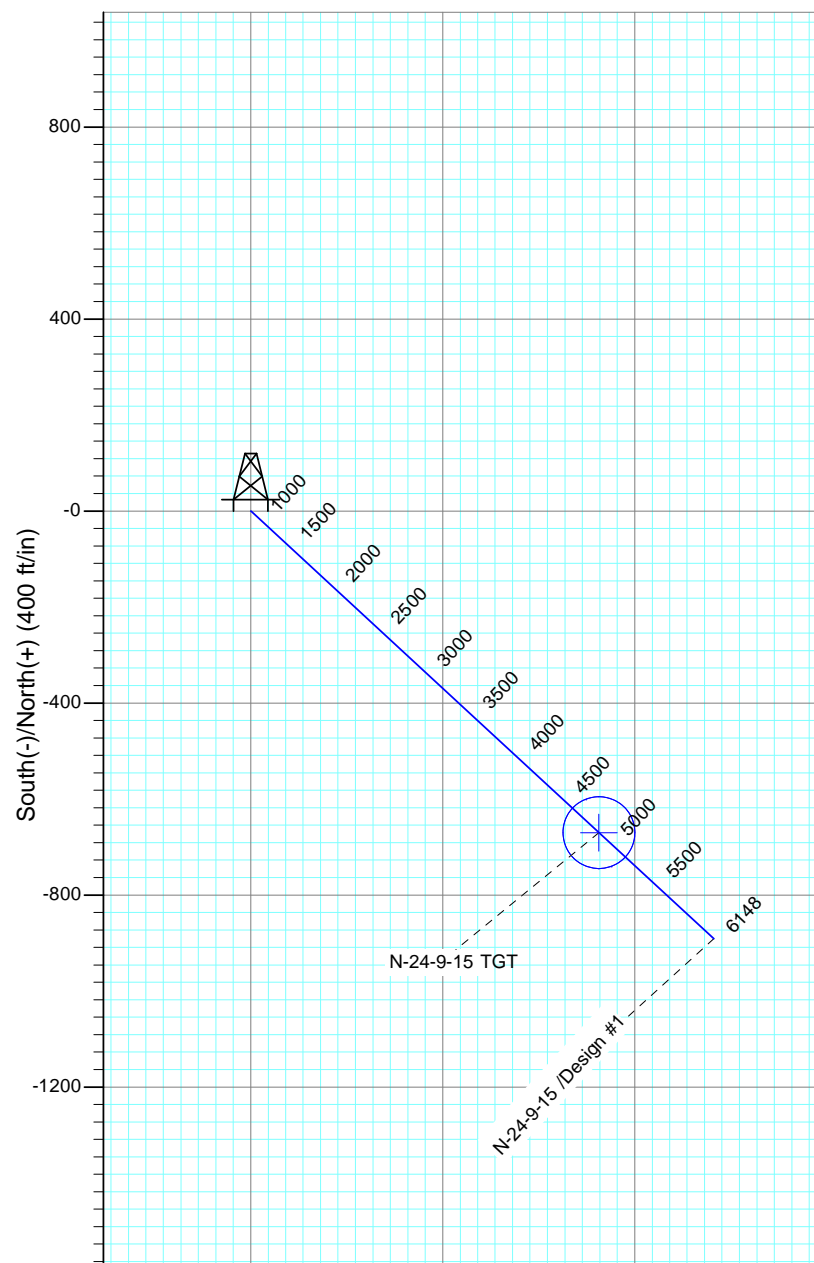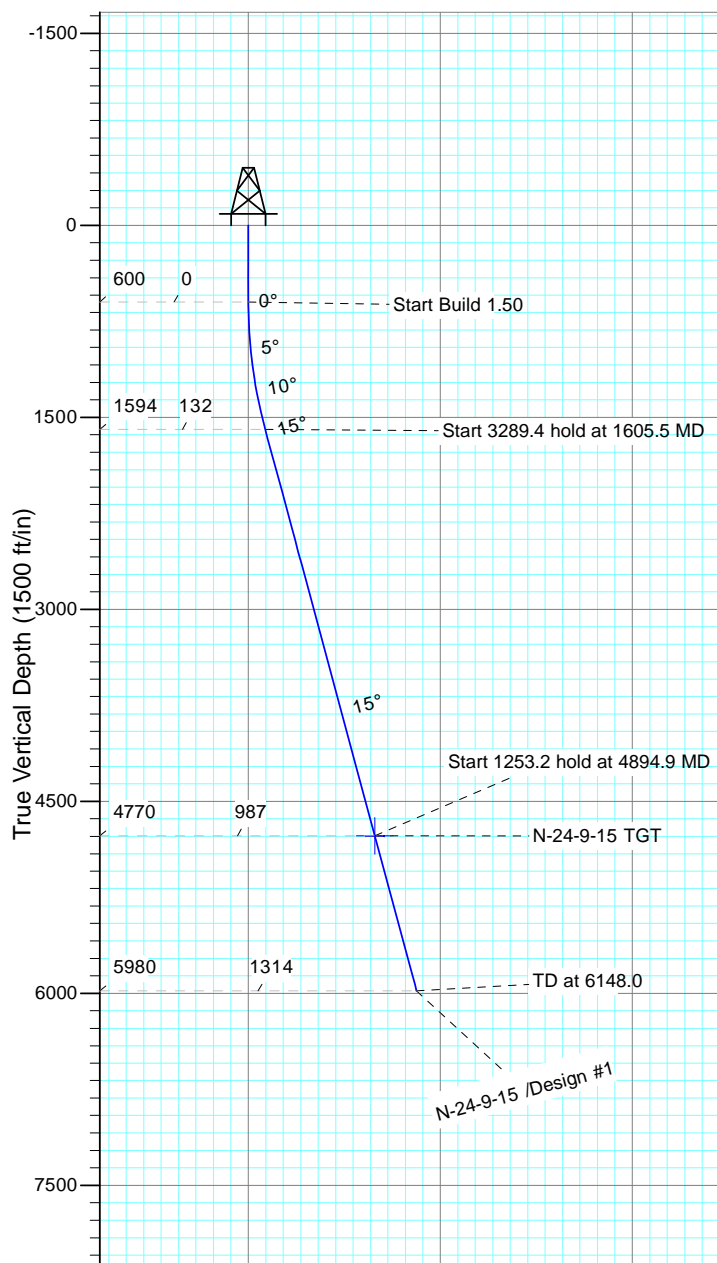

API Well Number: 43013528680000





Project: USGS Myton SW (UT)
Site: SECTION 8 T9S, R16E
Well: B-17-9-16
Wellbore: Wellbore #1
Design: Design #1



Azimuths to True North
Magnetic North: 11.00°

Magnetic Field
Strength: 51991.2snT
Dip Angle: 65.71°
Date: 2/12/2014
Model: IGRF2010


KOP @ 600'
DOGLEG RATE 1.5 DEG/100
TARGET RADIUS IS 75'

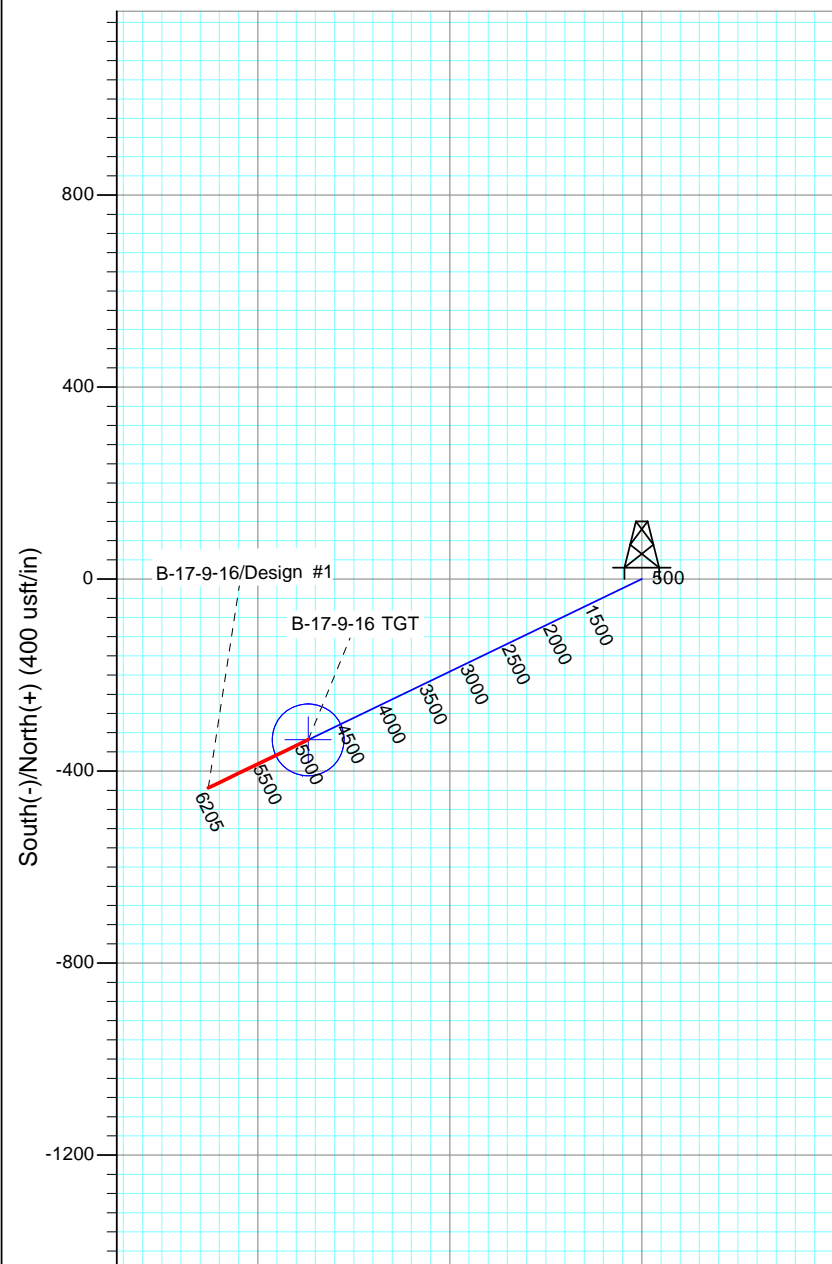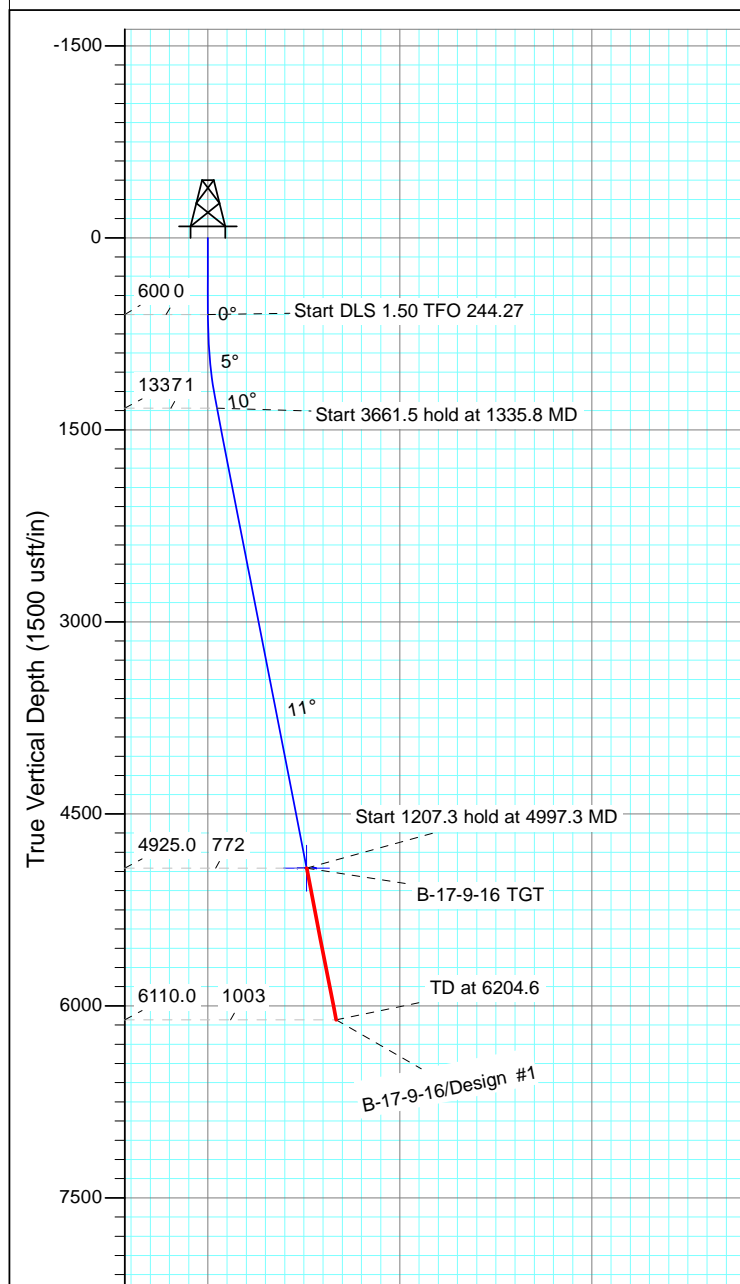

API Well Number: 43013528680000





Project: USGS Myton SW (UT)
Site: SECTION 18 T9, R16
Well: O-17-9-16
Wellbore: Wellbore #1
Desian: Desian #1



Azimuths to True North
Magnetic North: 11.05°


Magnetic Field
Strength: 52015.9snT
Dip Angle: 65.71°
Date: 10/8/2013
Model: IGRF2010

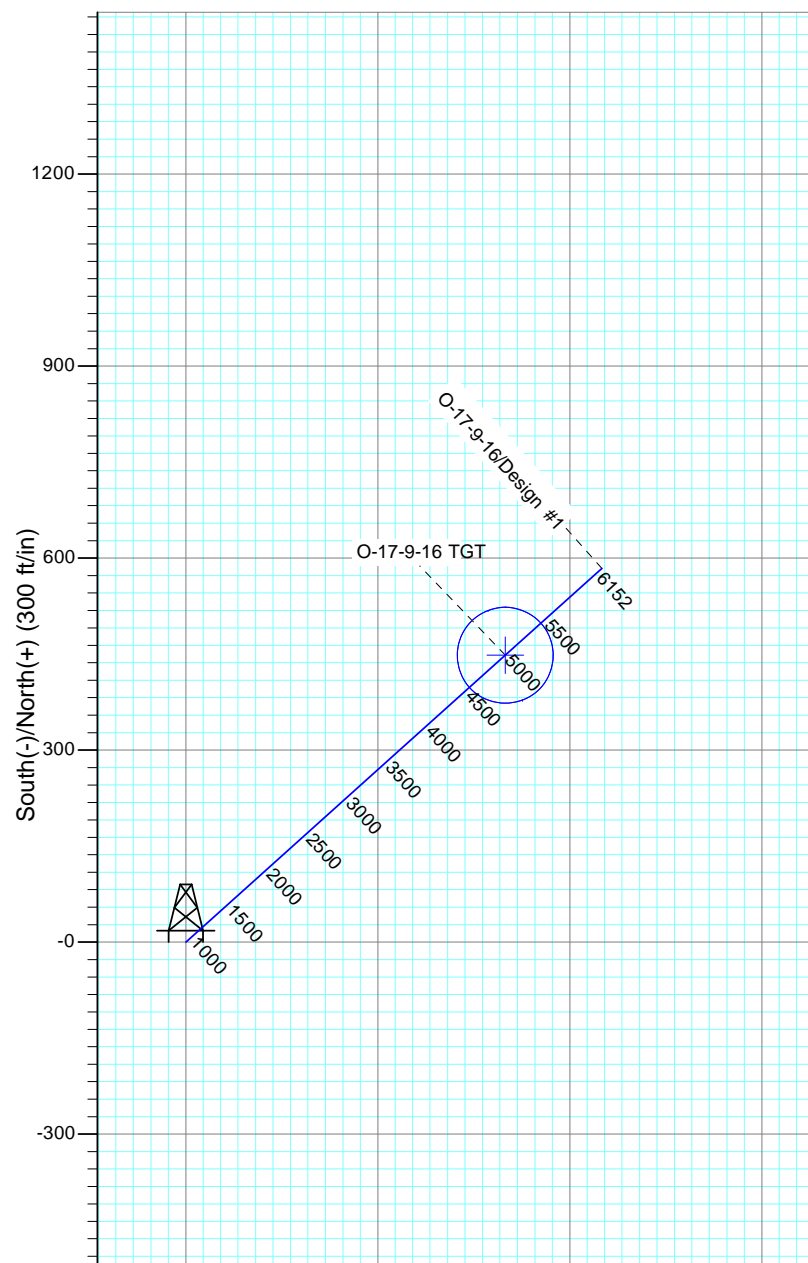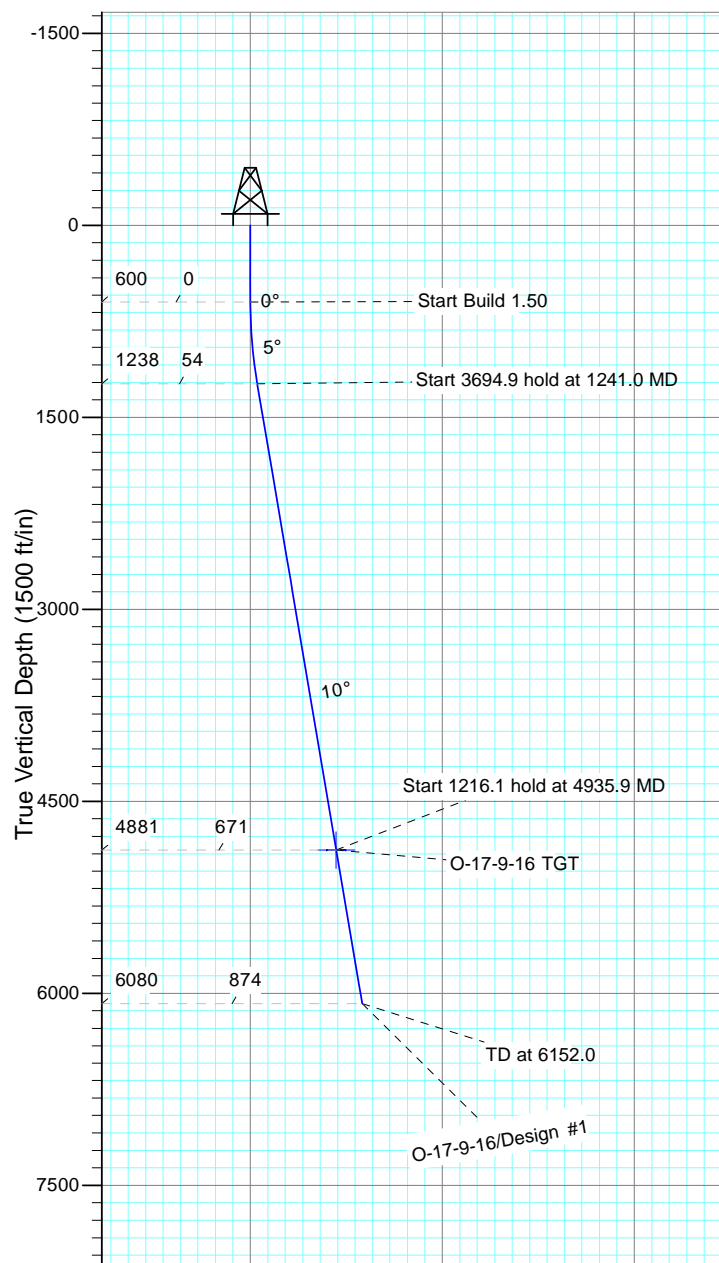

API Well Number: 43013528680000





Project: USGS Myton SW (UT)
Site: SECTION 18 T9, R16
Well: P-17-9-16
Wellbore: Wellbore #1
Design: Design #1



Azimuths to True North
Magnetic North: 11.05°


Magnetic Field
Strength: 52015.9snT
Dip Angle: 65.71°
Date: 10/8/2013
Model: IGRF2010

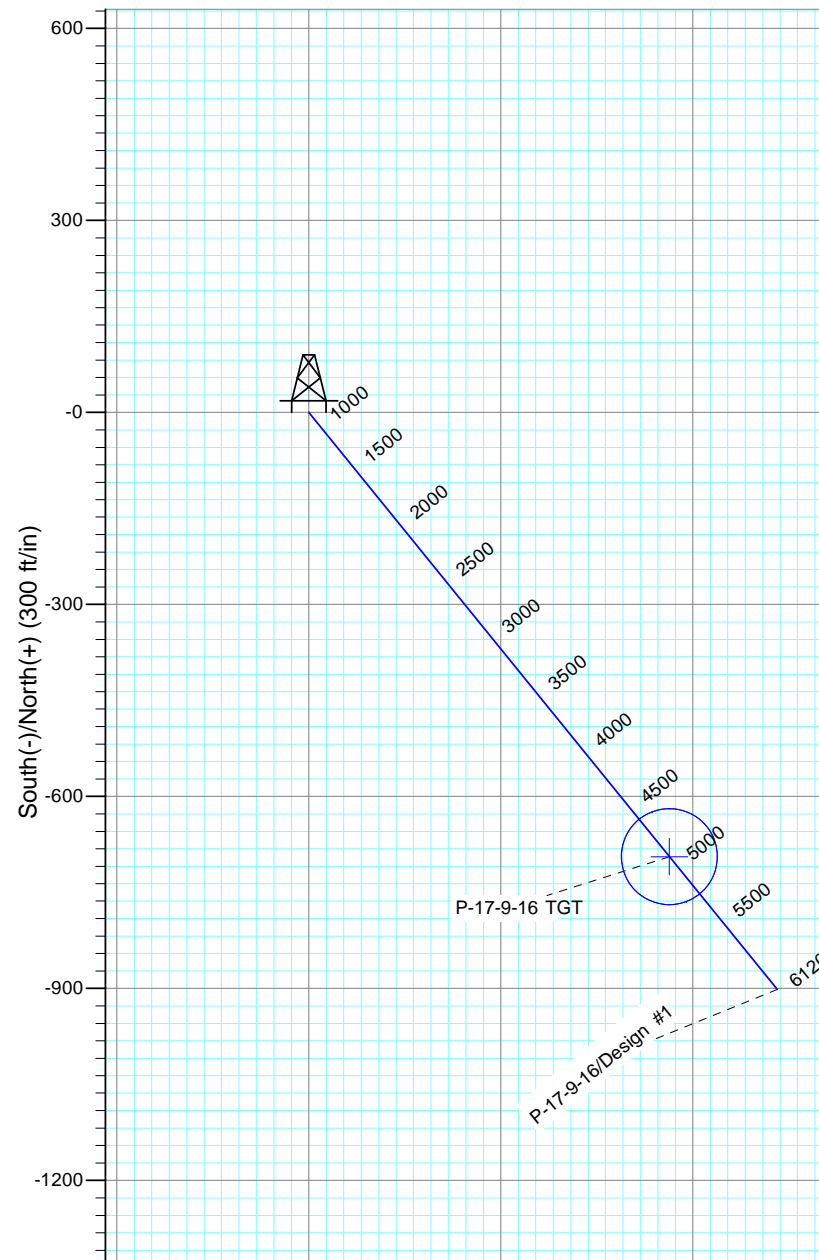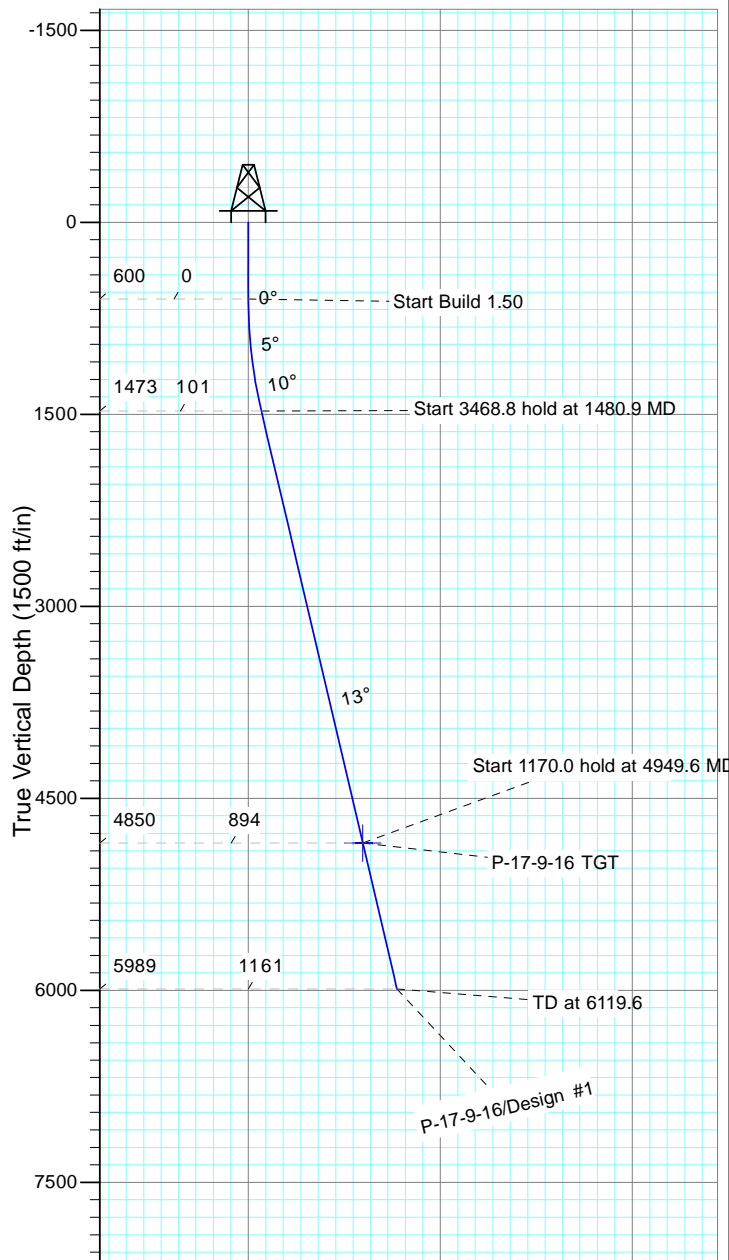

API Well Number: 43013528680000





Project: USGS Myton SW (UT)
Site: SECTION 19 T9S, R16E
Well: G-19-9-16
Wellbore: Wellbore #1
Design: Design #1



Azimuths to True North
Magnetic North: 11.06°


Magnetic Field
Strength: 52011.5snT
Dip Angle: 65.70°
Date: 9/30/2013
Model: IGRF2010

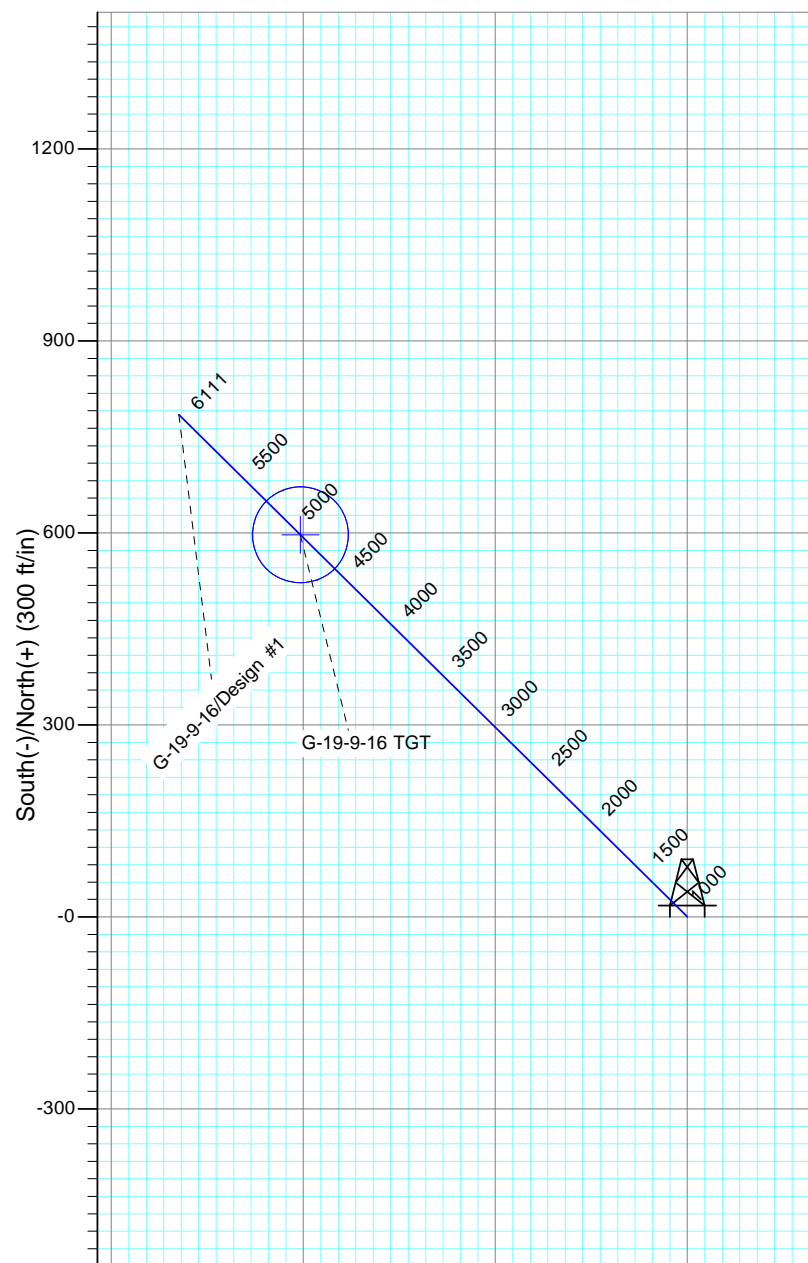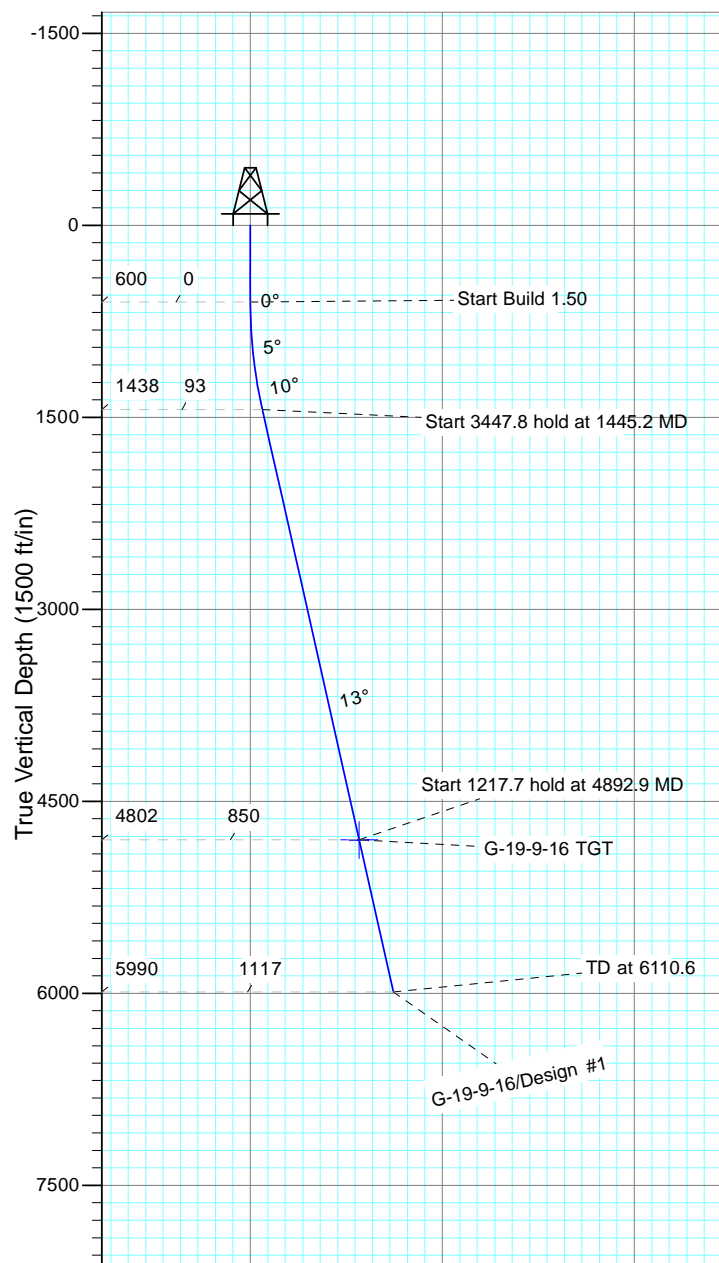

API Well Number: 43013528680000





Project: USGS Myton SW (UT)
Site: SECTION 19 T9S, R16E
Well: H-19-9-16
Wellbore: Wellbore #1
Design: Design #1



Azimuths to True North
Magnetic North: 11.06°


Magnetic Field
Strength: 52011.5snT
Dip Angle: 65.70°
Date: 9/30/2013
Model: IGRF2010

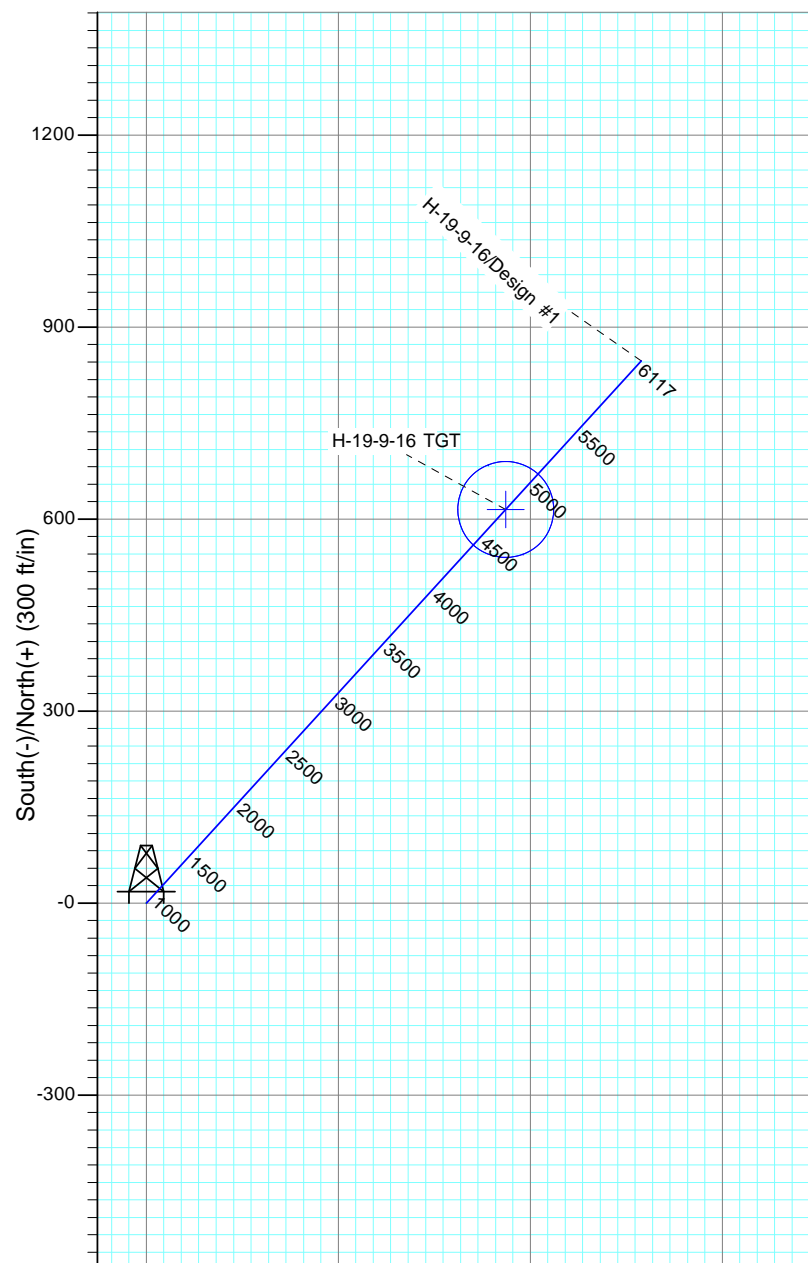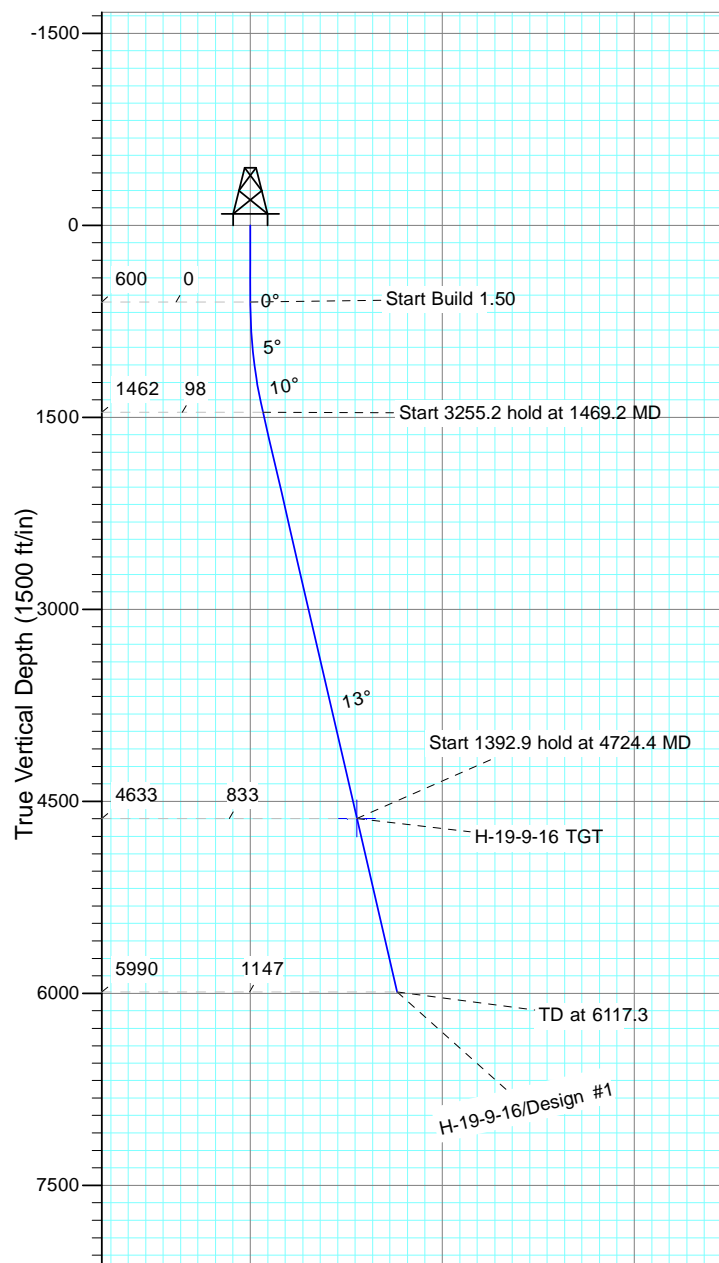

API Well Number: 43013528680000





Project: USGS Myton SW (UT)
Site: SECTION 15 T9S, R16E
Well: X-15-9-16
Wellbore: Wellbore #1
Design: Design #1



Azimuths to True North
Magnetic North: 11.03°


Magnetic Field
Strength: 52019.8snT
Dip Angle: 65.71°
Date: 10/9/2013
Model: IGRF2010

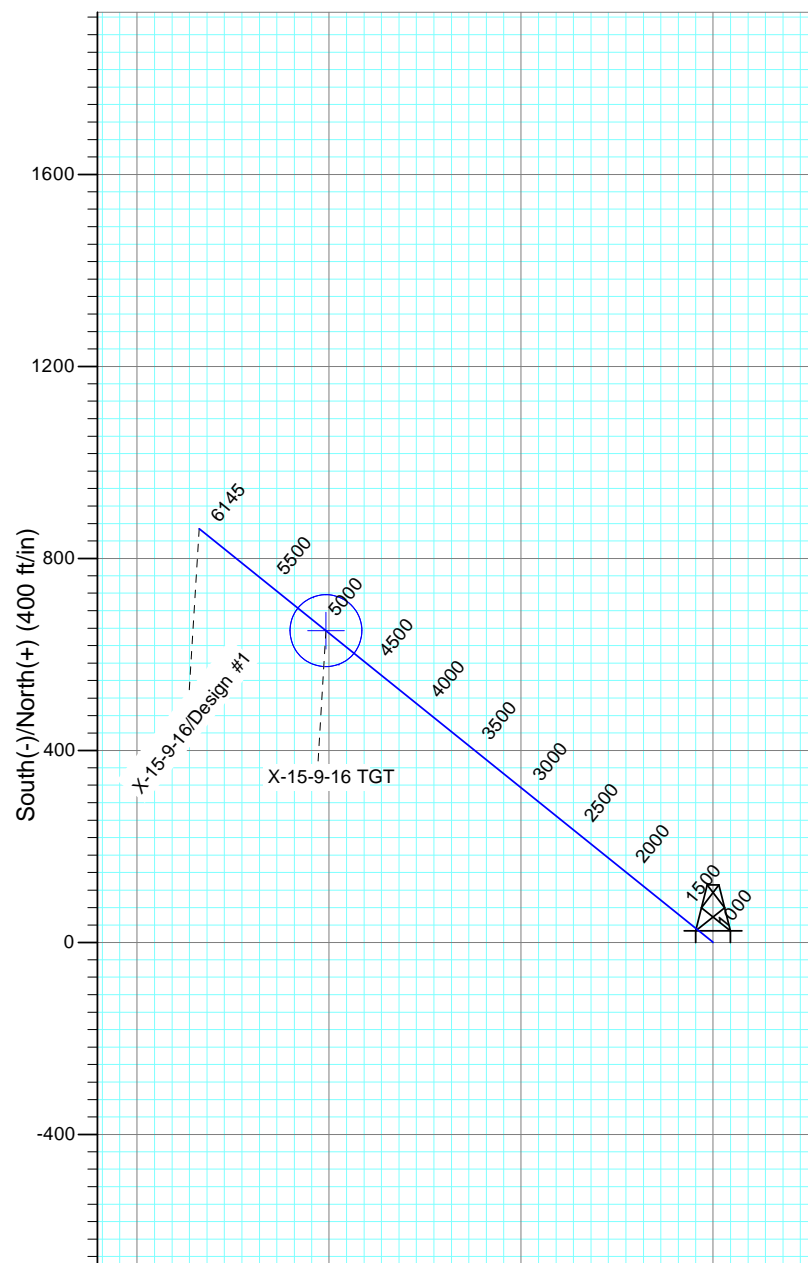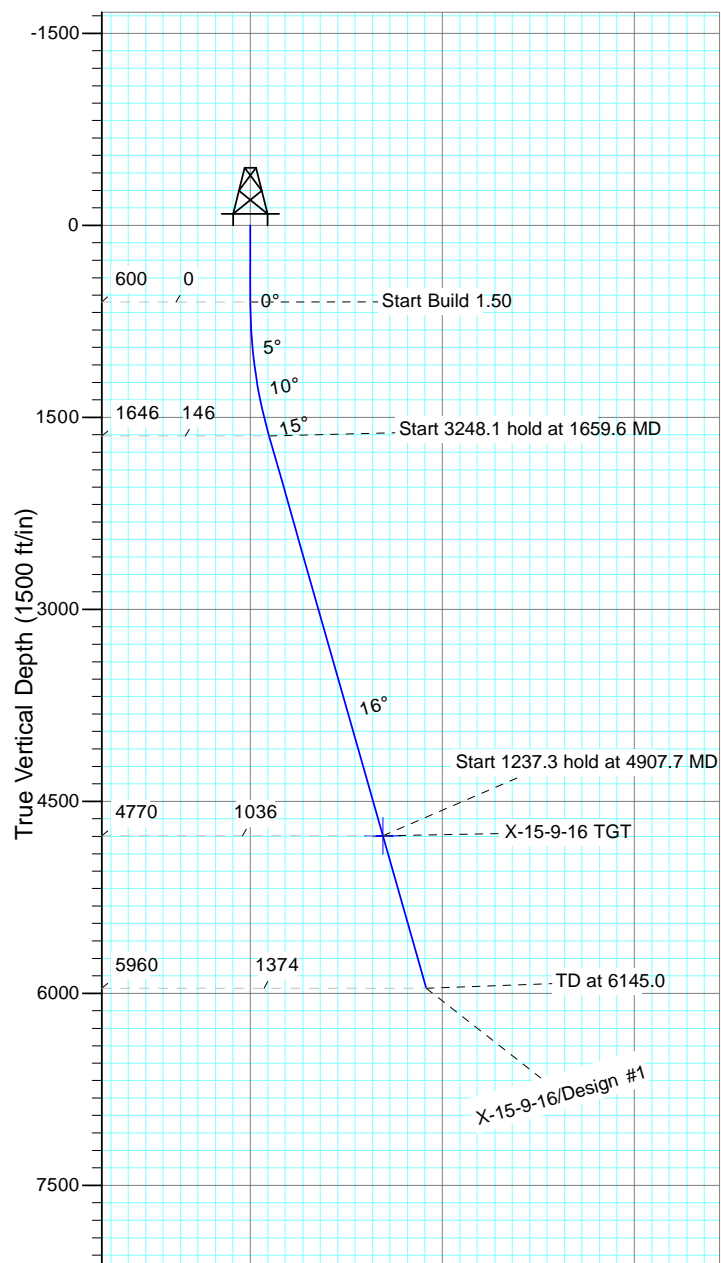

API Well Number: 43013528680000





Project: USGS Myton SW (UT)
Site: SECTION 22 T9, R16
Well: W-15-9-16
Wellbore: Wellbore #1
Design: Design #1



Azimuths to True North
Magnetic North: 11.03°


Magnetic Field
Strength: 52019.8snT
Dip Angle: 65.71°
Date: 10/9/2013
Model: IGRF2010

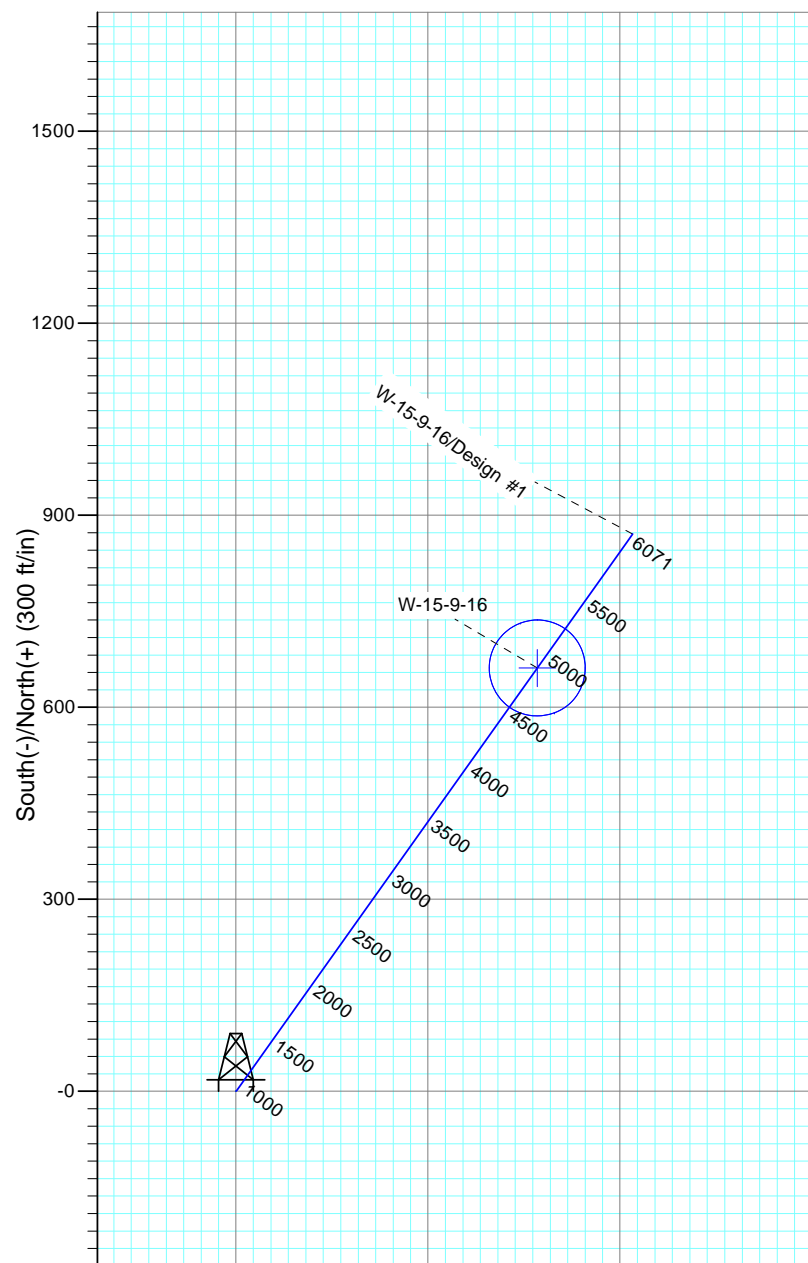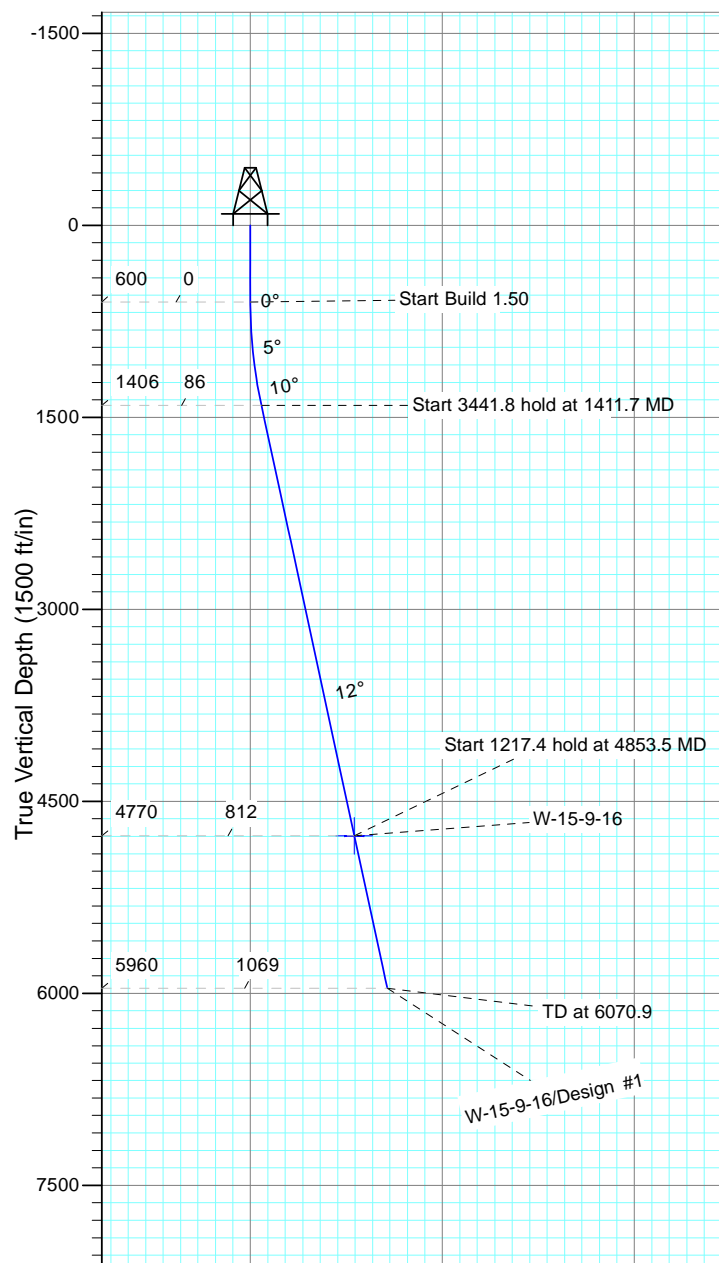

API Well Number: 43013528680000





Project: USGS Myton SW (UT)
Site: SECTION 22 T9, R16
Well: I-22-9-16
Wellbore: Wellbore #1
Design: Design #1



Azimuths to True North
Magnetic North: 11.03°


Magnetic Field
Strength: 52018.4snT
Dip Angle: 65.71°
Date: 10/9/2013
Model: IGRF2010

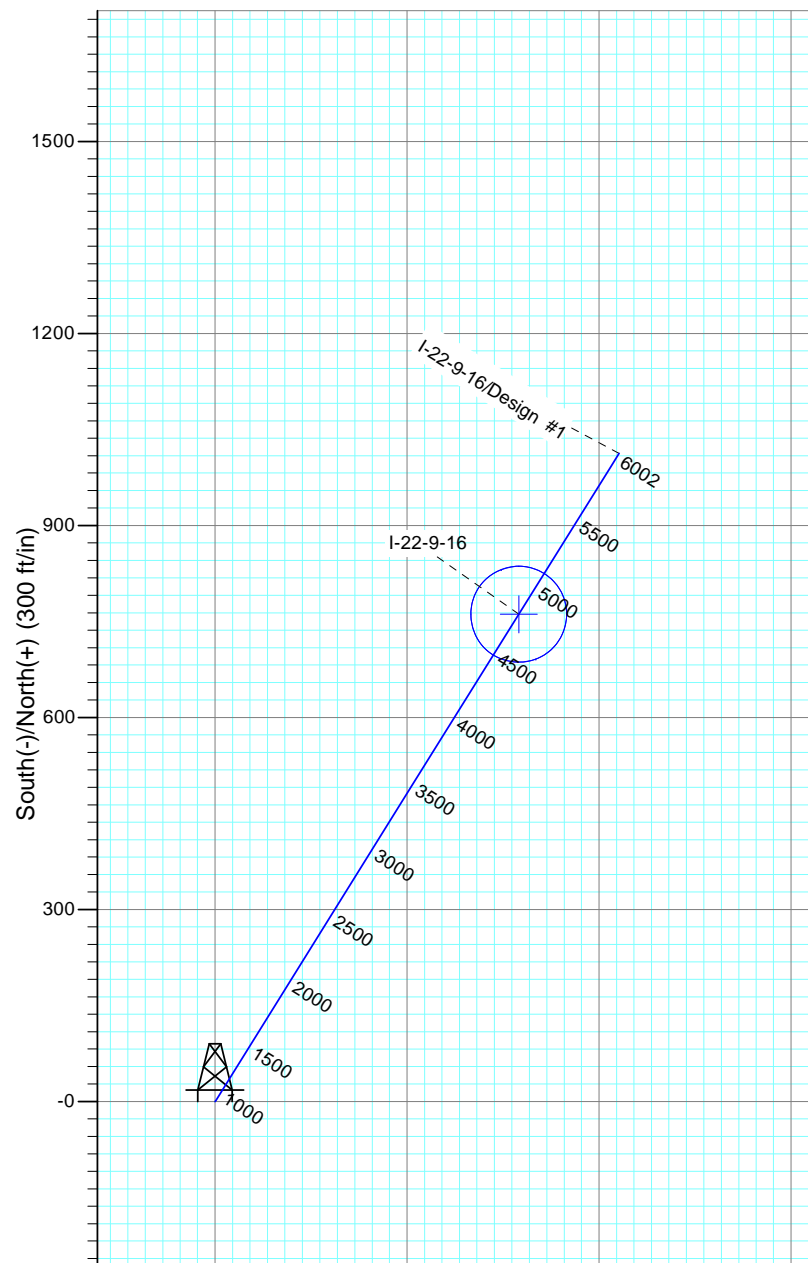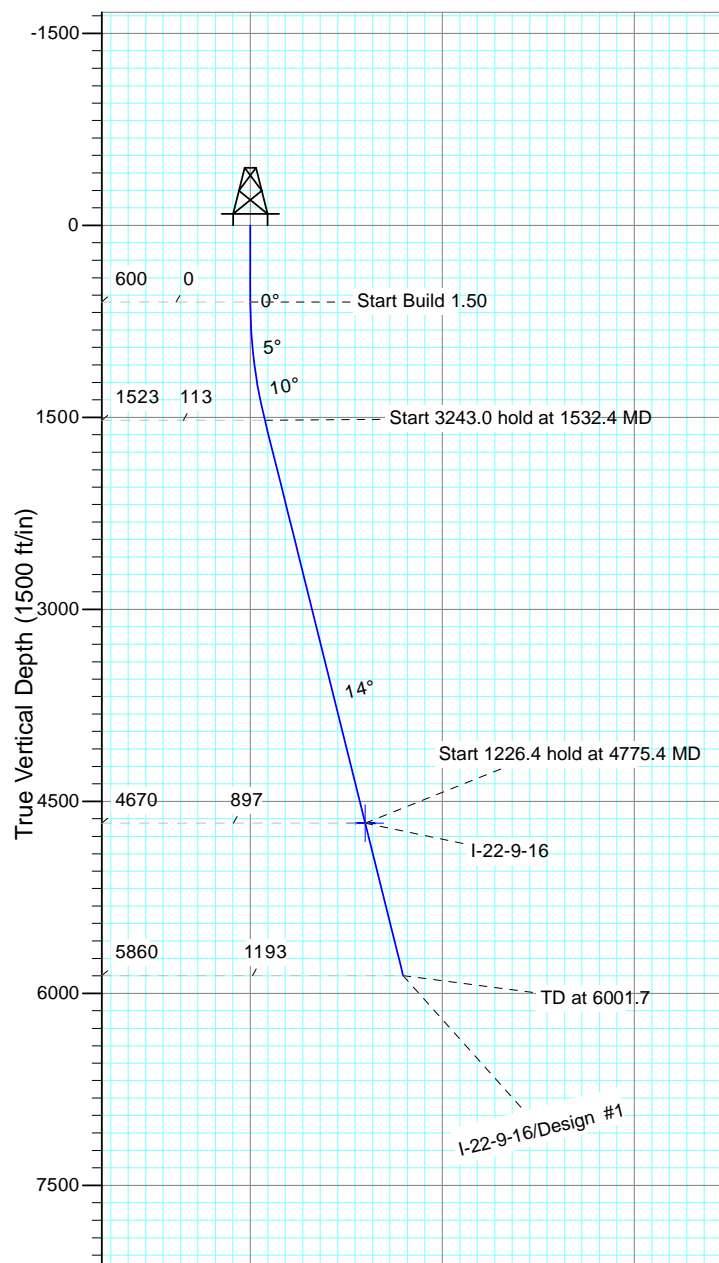

API Well Number: 43013528680000





Project: USGS Myton SW (UT)
Site: SECTION 22 T9, R16
Well: L-22-9-16
Wellbore: Wellbore #1
Design: Design #1



Azimuths to True North
Magnetic North: 11.02°


Magnetic Field
Strength: 52015.2snT
Dip Angle: 65.71°
Date: 10/21/2013
Model: IGRF2010

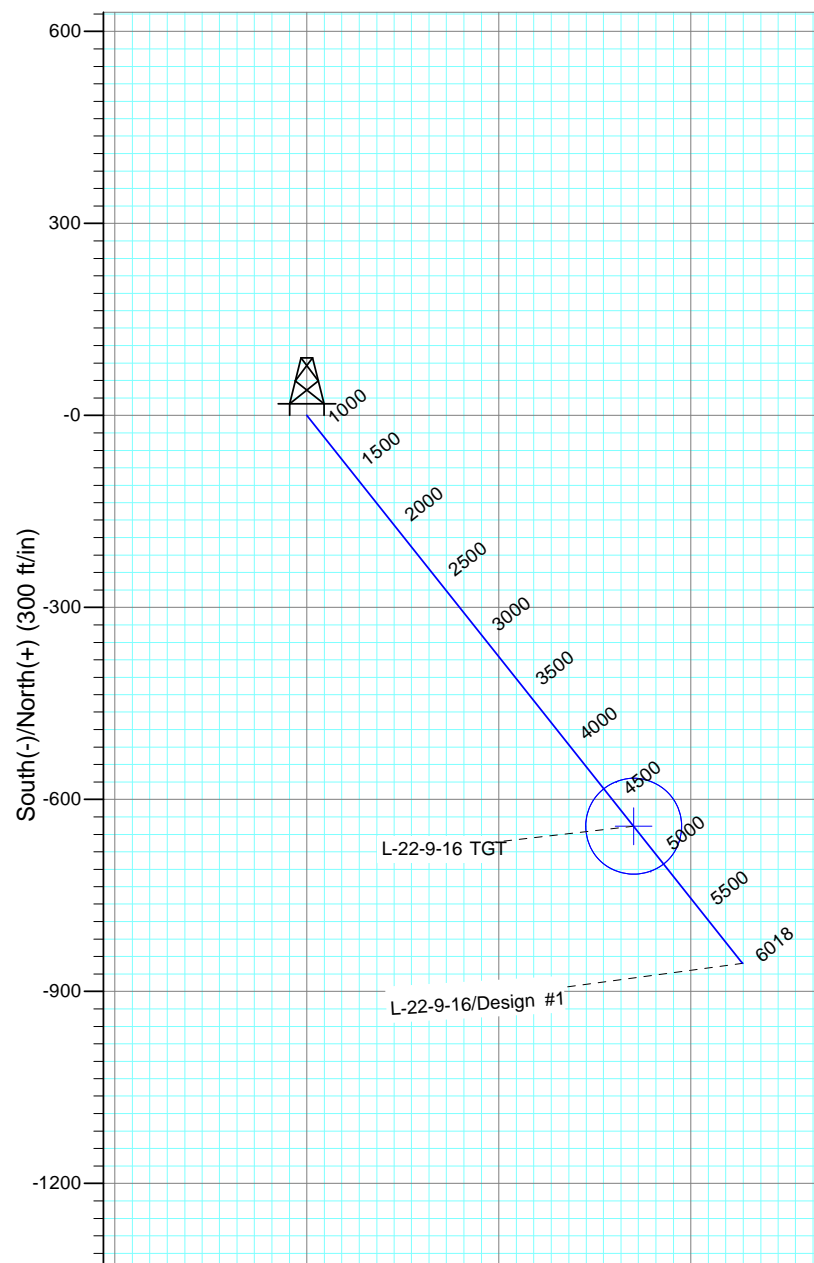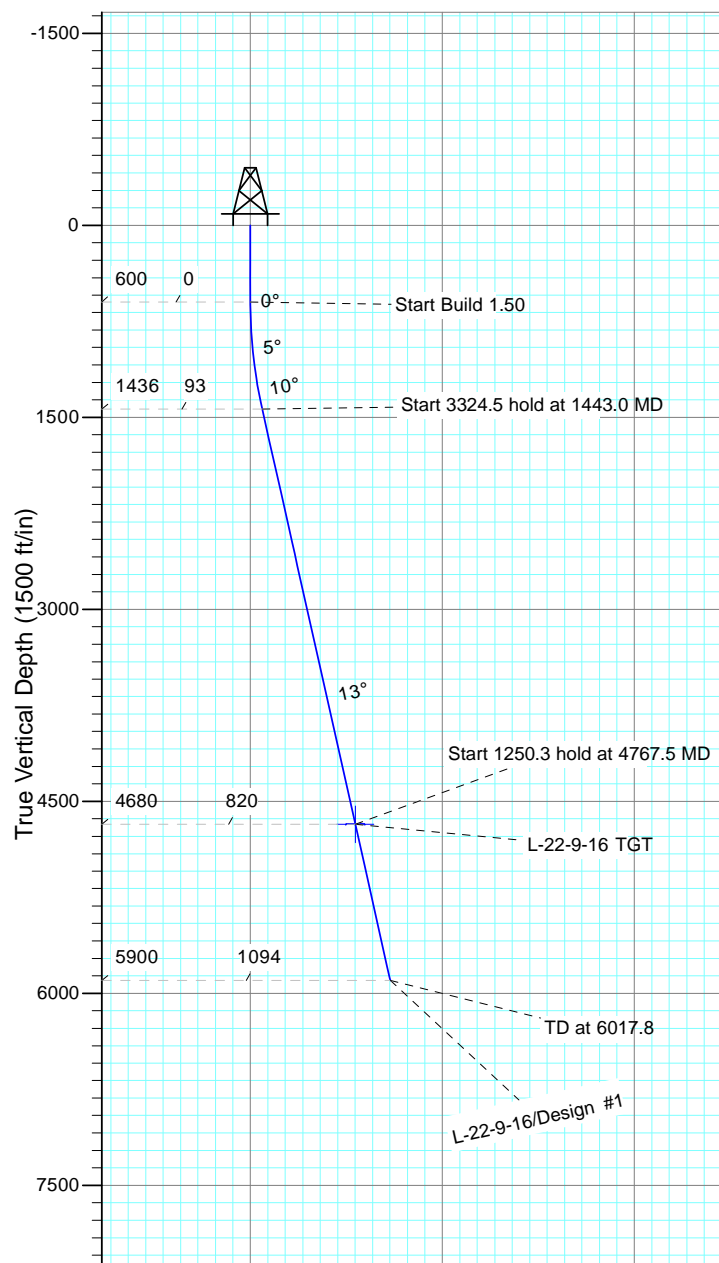

API Well Number: 43013528680000





Project: USGS Myton SW (UT)
Site: SECTION 20 T9, R16
Well: N-20-9-16
Wellbore: Wellbore #1
Design: Design #1



Azimuths to True North
Magnetic North: 11.05°

Magnetic Field
Strength: 52011.1snT
Dip Angle: 65.70°
Date: 9/30/2013
Model: IGRF2010

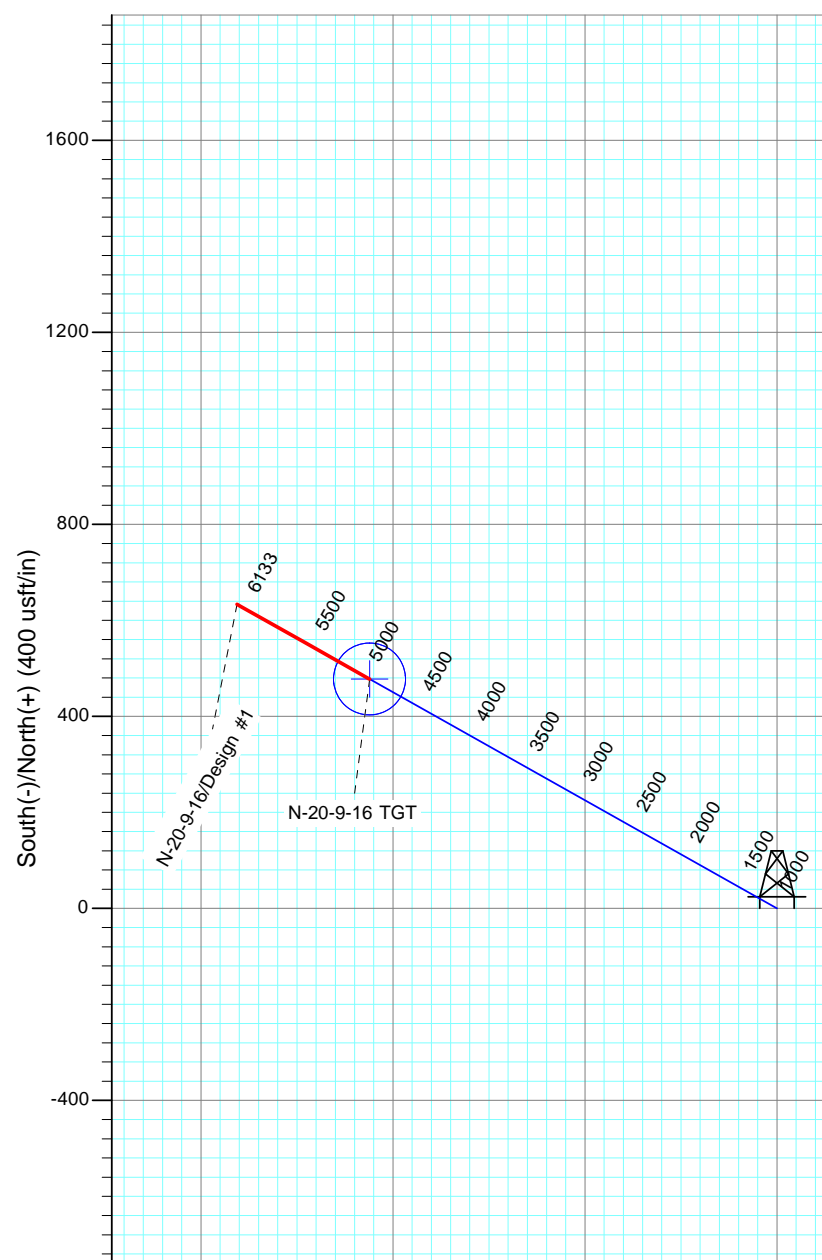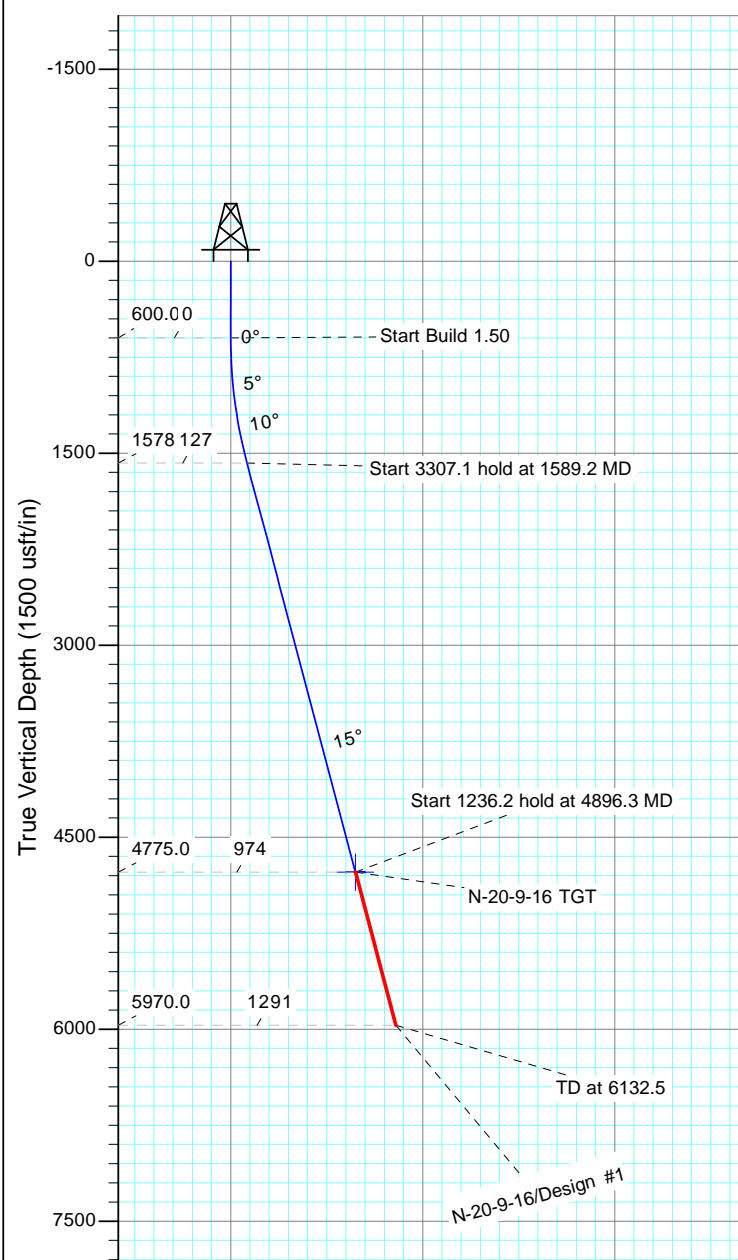

API Well Number: 43013528680000





Project: USGS Myton SW (UT)
Site: SECTION 13 T9S, R16E
Well: G-13-9-16
Wellbore: Wellbore #1
Design: Design #1



Azimuths to True North
Magnetic North: 11.02°

Magnetic Field
Strength: 52032.9snT
Dip Angle: 65.72°
Date: 10/9/2013
Model: IGRF2010

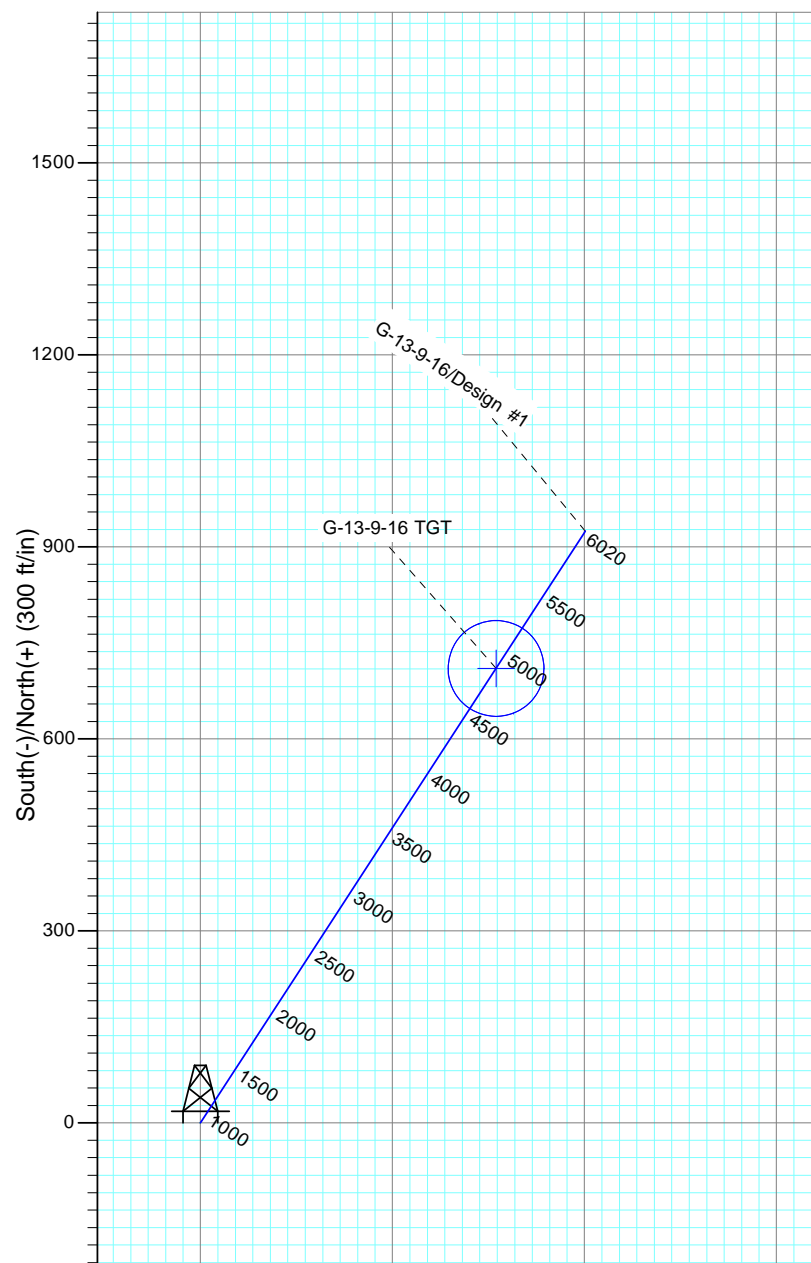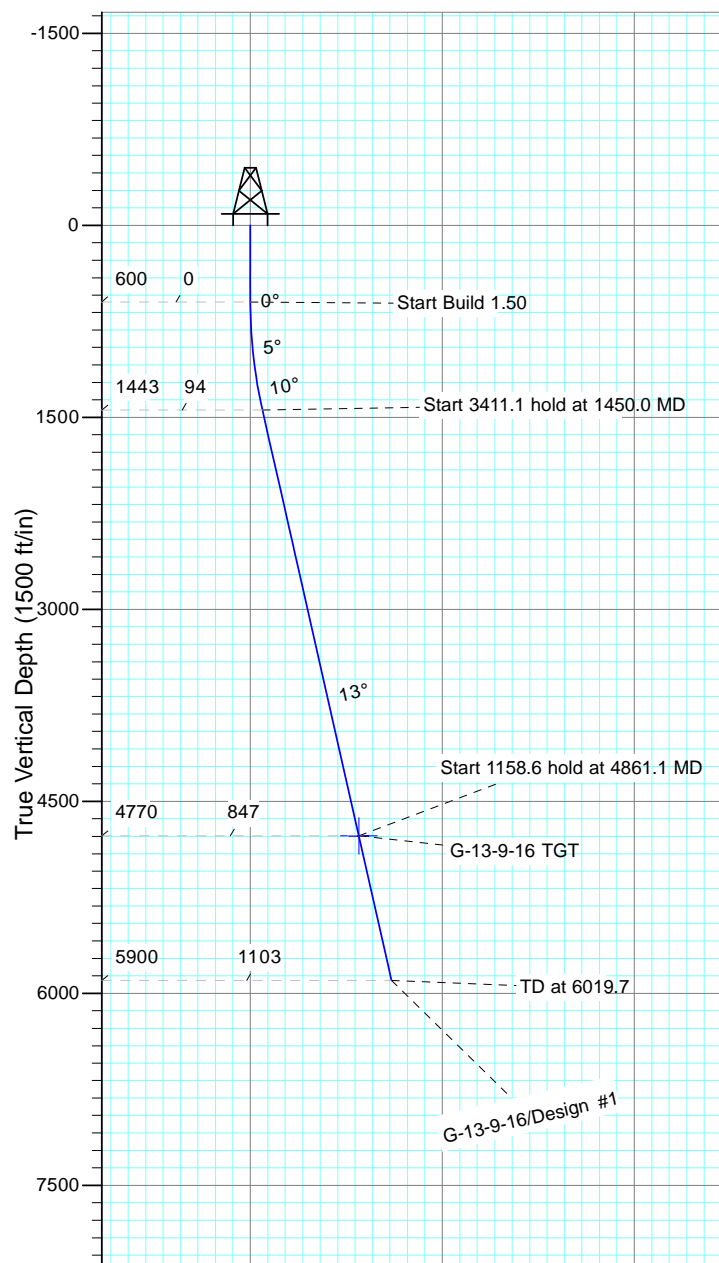

API Well Number: 43013528680000





Project: USGS Myton SW (UT)
Site: SECTION 13 T9, R15
Well: P-18-9-16
Wellbore: Wellbore #1
Design: Design #1



Azimuths to True North
Magnetic North: 11.05°


Magnetic Field
Strength: 52009.6snT
Dip Angle: 65.70°
Date: 10/21/2013
Model: IGRF2010

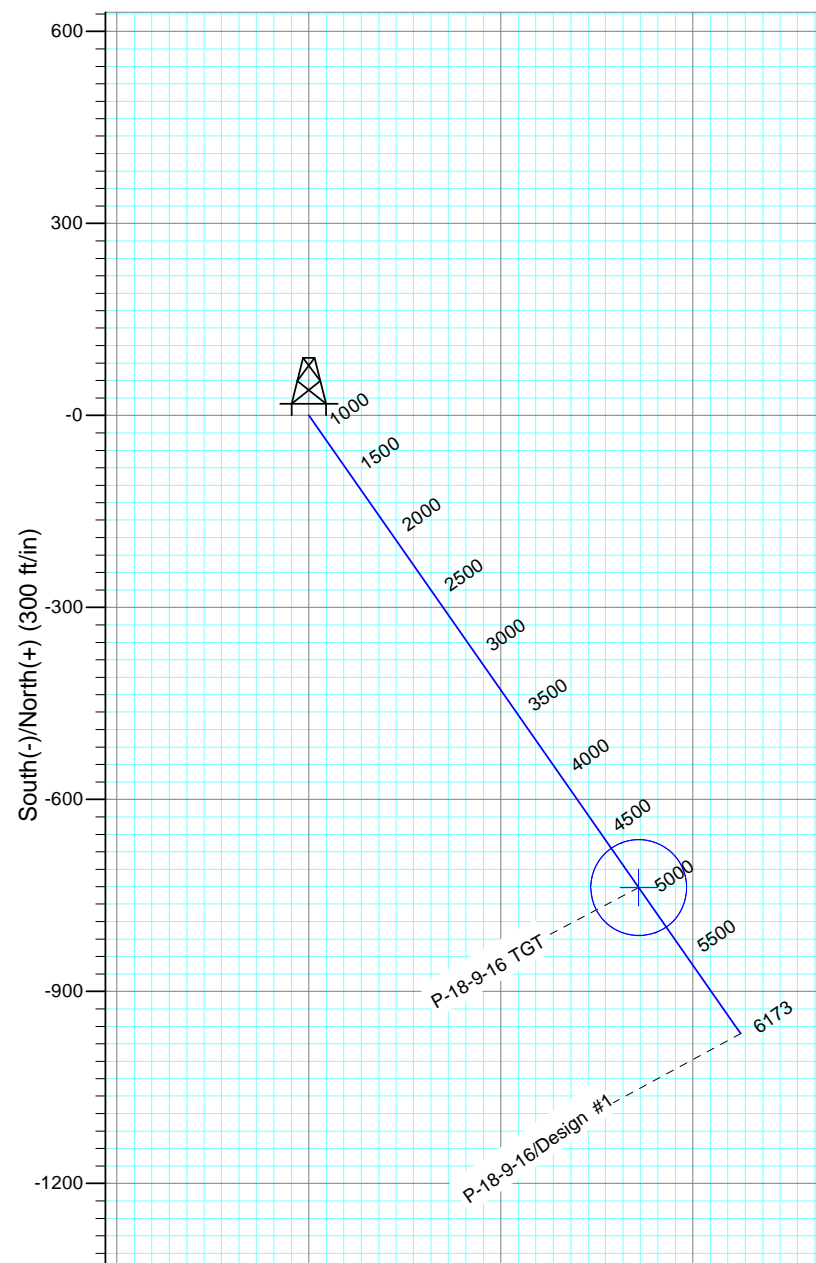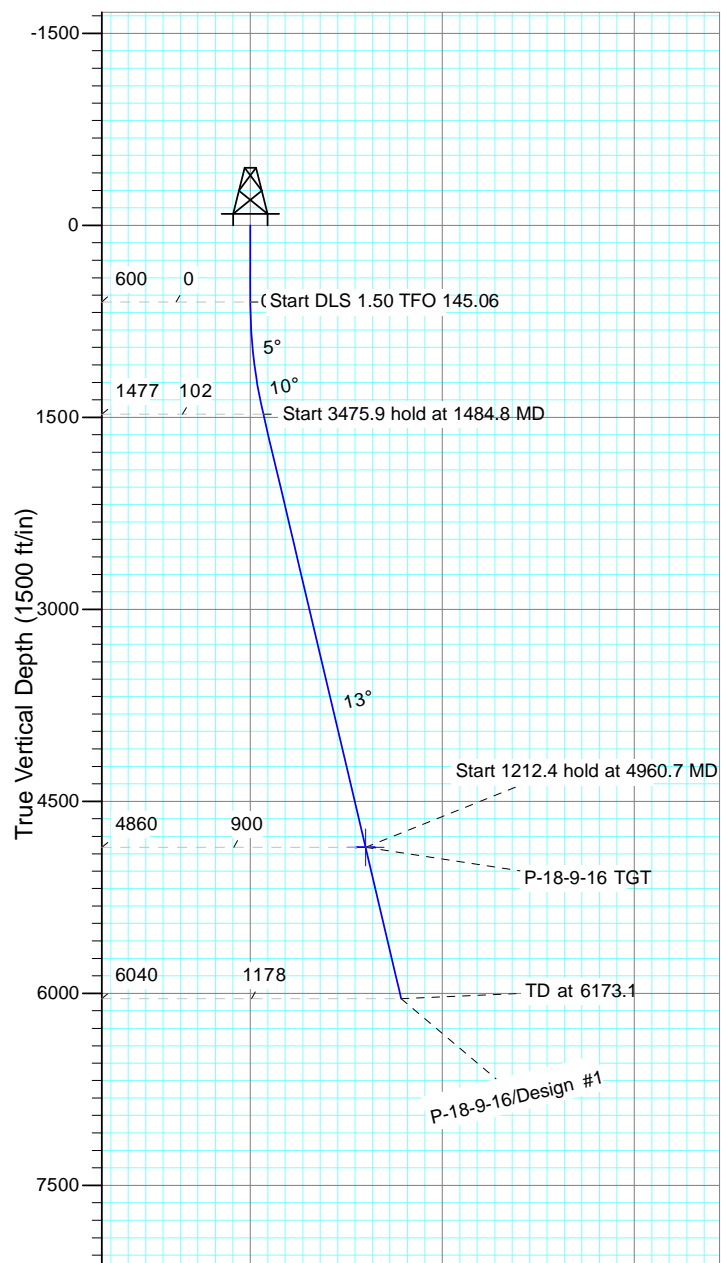

API Well Number: 43013528680000





Project: USGS Myton SW (UT)
Site: SECTION 30 T8, R18
Well: J-25-8-17
Wellbore: Wellbore #1
Desian: Desian #1



Azimuths to True North
Magnetic North: 10.97°


Magnetic Field
Strength: 52085.6snT
Dip Angle: 65.80°
Date: 10/21/2013
Model: IGRF2010

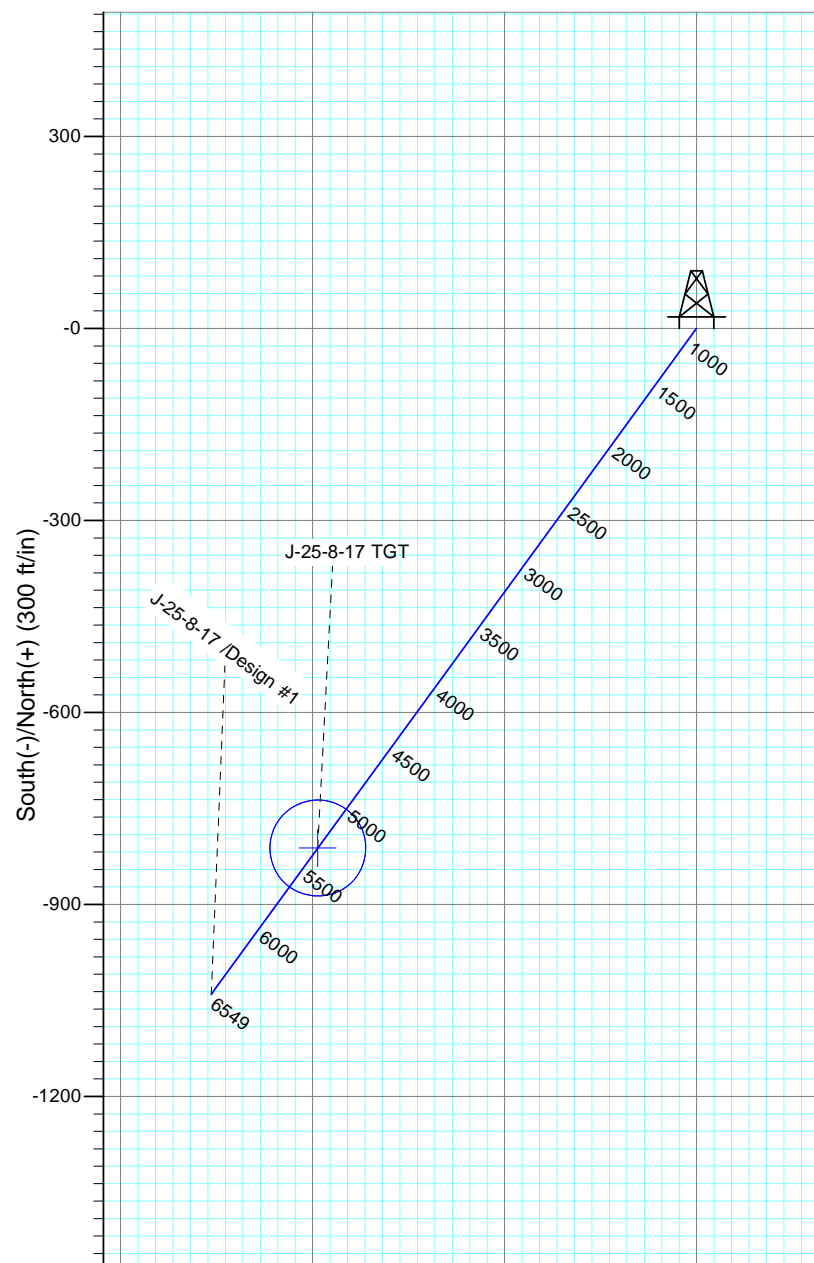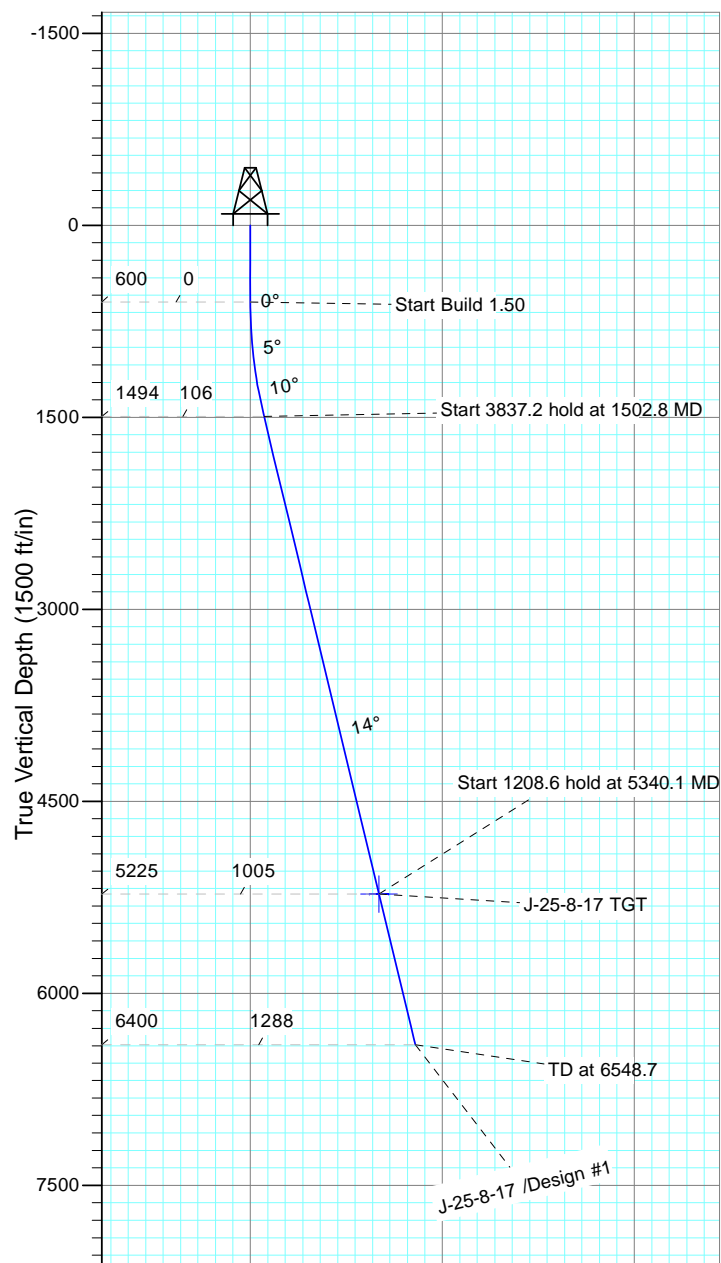

API Well Number: 43013528680000





Project: USGS Myton SW (UT)
Site: SECTION 30 T8, R18
Well: G-30-8-18
Wellbore: Wellbore #1
Design: Design #1



Azimuths to True North
Magnetic North: 10.97°

Magnetic Field
Strength: 52085.7snT
Dip Angle: 65.80°
Date: 10/21/2013
Model: IGRF2010

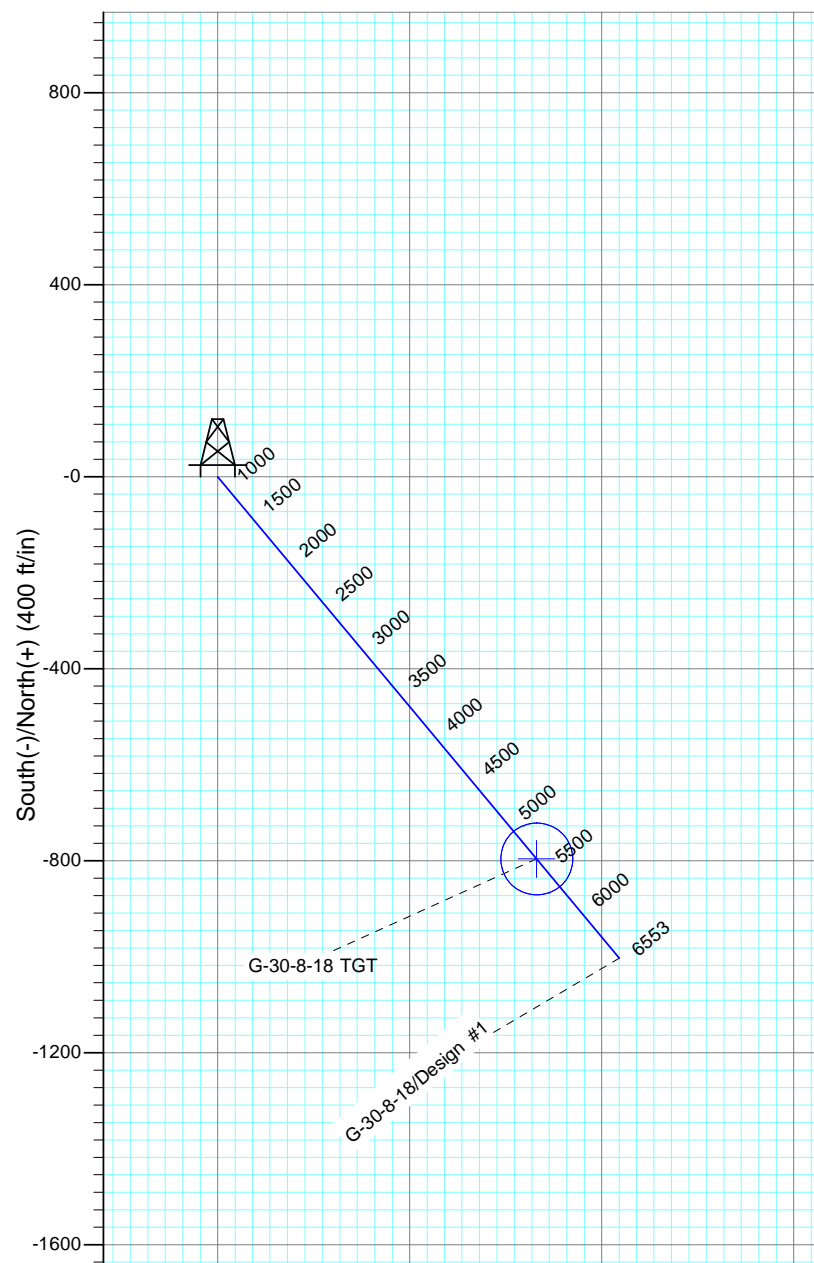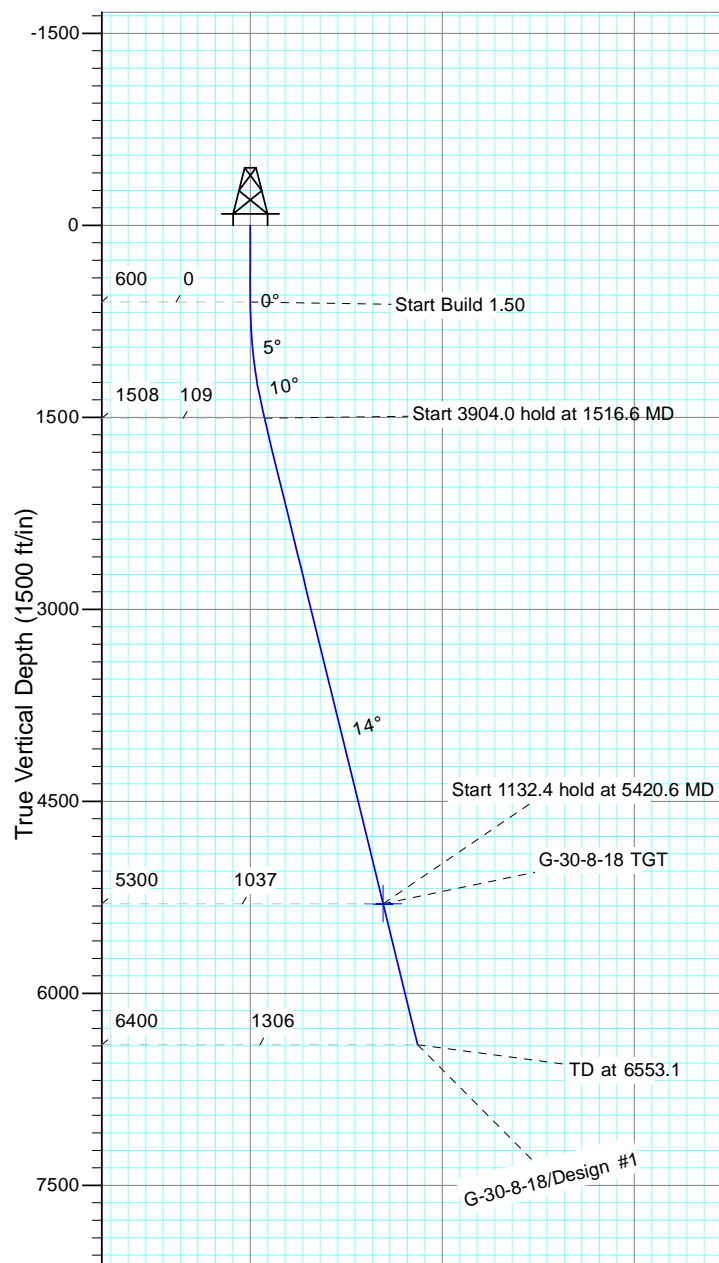

API Well Number: 43013528680000

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 2/24/2014

API NO. ASSIGNED: 43013528680000

WELL NAME: GMBU G-13-9-16

OPERATOR: NEWFIELD PRODUCTION COMPANY (N2695)

PHONE NUMBER: 435 646-4936

CONTACT: Heather Calder

PROPOSED LOCATION: SWNW 13 090S 160E

Permit Tech Review: ☒

SURFACE: 1974 FNL 0835 FWL

Engineering Review: ☐

BOTTOM: 1059 FNL 1452 FWL

Geology Review: ☒

COUNTY: DUCHESNE

LATITUDE: 40.03263

LONGITUDE: -110.07417

UTM SURF EASTINGS: 578992.00

NORTHINGS: 4431790.00

FIELD NAME: MONUMENT BUTTE

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-64805

PROPOSED PRODUCING FORMATION(S): GREEN RIVER

SURFACE OWNER: 1 - Federal

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

☒ PLAT☒ Bond: FEDERAL - WYB000493☐ Potash☐ Oil Shale 190-5☐ Oil Shale 190-3☐ Oil Shale 190-13☒ Water Permit: 437478☐ RDCC Review:☐ Fee Surface Agreement☐ Intent to Commingle

Commingle Approved

LOCATION AND SITING:

☐ R649-2-3.

Unit: GMBU (GRRV)

☐ R649-3-2. General☐ R649-3-3. Exception☒ Drilling Unit

Board Cause No: Cause 213-11

Effective Date: 11/30/2009

Siting: Suspends General Siting

☒ R649-3-11. Directional Drill

Comments: Presite Completed

Stipulations: 4 - Federal Approval - dmason
15 - Directional - dmason
27 - Other - bhill

RECEIVED: March 04, 2014



GARY R. HERBERT
Governor

SPENCER J. COX
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: GMBU G-13-9-16
API Well Number: 43013528680000
Lease Number: UTU-64805
Surface Owner: FEDERAL
Approval Date: 3/4/2014

Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. 40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well - contact Carol Daniels at 801-538-5284

(please leave a voicemail message if not available)

OR

submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website
at <http://oilgas.ogm.utah.gov>

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) - due within 5 days of spudding the well
- Monthly Status Report (Form 9) - due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) - due prior to implementation
- Written Notice of Emergency Changes (Form 9) - due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) - due prior to implementation
- Report of Water Encountered (Form 7) - due within 30 days after completion
- Well Completion Report (Form 8) - due within 30 days after completion or plugging

Approved By:

A handwritten signature in black ink, appearing to read "John Rogers", written over a horizontal line.

For John Rogers
Associate Director, Oil & Gas

RECEIVED
AUG 18 2014
BLMUNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

FEB 26 2014

FORM APPROVED
OMB No. 1004-0136
Expires July 31, 2010

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU64805
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator NEWFIELD EXPLORATION Contact: HEATHER CALDER E-Mail: hcalder@newfield.com		7. If Unit or CA Agreement, Name and No. GMBU
3a. Address ROUTE 3 BOX 3630 MYTON, UT 84052		8. Lease Name and Well No. GMBU G-13-9-16
3b. Phone No. (include area code) Ph: 435-646-4936 Fx: 435-646-4936		9. API Well No. 43013-52868
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SWNW 1974FNL 835FWL At proposed prod. zone NENW 1059FNL 1452FWL		10. Field and Pool, or Exploratory MONUMENT BUTTE
14. Distance in miles and direction from nearest town or post office* 15.9 MILES SOUTH OF MYTON, UT		11. Sec., T., R., M., or Blk. and Survey or Area Sec 13 T9S R16E Mer SLB
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1059'	16. No. of Acres in Lease 560.00	12. County or Parish DUCHESNE
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 1554'	19. Proposed Depth 6020 MD 5900 TVD	13. State UT
21. Elevations (Show whether DF, KB, RT, GL, etc.) 5542 GL	22. Approximate date work will start 04/01/2014	17. Spacing Unit dedicated to this well 20.00
		20. BLM/BIA Bond No. on file WYB000493
		23. Estimated duration 7 DAYS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|--|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature (Electronic Submission)	Name (Printed/Typed) HEATHER CALDER Ph: 435-646-4936	Date 02/24/2014
Title PRODUCTION TECHNICIAN		
Approved by (Signature) 	Name (Printed/Typed) Jerry Kenczka	Date AUG 05 2014
Title Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE	

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #236467 verified by the BLM Well Information System
For NEWFIELD EXPLORATION, sent to the Vernal
Committed to AFMSS for processing by LESLIE BUHLER on 02/26/2014 ()

UDOGM

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED

** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED **

14LBB3659AE

NDS 1/9/14



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Newfield Production Company
Well No: GMBU G-13-9-16
API No: 43-013-52868

Location: SWNW, Sec. 13, T9S R16E
Lease No: UTU-87538
Agreement: Greater Monument Butte

OFFICE NUMBER: (435) 781-4400

OFFICE FAX NUMBER: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify Environmental Scientist)	-	Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	-	Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings to: blm_ut_vn_opreport@blm.gov
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

- All new and replacement internal combustion gas field engines of less than or equal to 300 design-rated horsepower must not emit more than 2 gms of NO_x per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower.
- All and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 gms of NO_x per horsepower-hour.
- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

Site Specific COAs

Minerals and Paleontology

- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

Green River District Reclamation Guidelines

The Operator will comply with the requirements of the ***Green River District (GRD) Reclamation Guidelines*** formalized by Green River District Instructional Memo UTG000-2014-004 on May 21, 2014.

CONDITIONS OF APPROVAL

Wildlife

In accordance with the Record of Decision for the Castle Peak and Eightmile Flat Oil and Gas Expansion Project, Newfield Rocky Mountains Inc., the following COA's are required:

- WFM-1 On level or gently sloping ground (5 percent slope or less) Newfield will elevate surface pipelines (4 inches or greater in diameter) a minimum of 6 inches above the ground to allow passage of small animals beneath the pipe. This ground clearance will be achieved by placing the pipeline on blocks at intervals of 150 to 200 feet.
- WFM-4 Newfield will install noise reduction devices on all pump jacks to reduce intermittent noise to 45 dBA at 660 feet from the source.

COA's derived from mitigating measures in the EA:

If construction and drilling is anticipated during any of the following wildlife seasonal spatial restrictions, a BLM biologist or a qualified consulting firm biologist must conduct applicable surveys using an accepted protocol prior to any ground disturbing activities.

- The well is located within crucial elk calving habitat. To minimize impacts construction and drilling is not allowed from May 15 – June 30. This restriction would not apply to maintenance and operation of existing facilities. This stipulation may be excepted if either the resource values change or the lessee/operator demonstrates to BLM's satisfaction that adverse impacts can be mitigated.

For protection of T&E Fish if drawing water from the Green River

- For areas of fresh water collection, an infiltration gallery will be constructed in a Service approved location. An infiltration gallery is basically a pit or trench dug within the floodplain to a depth below the water table. Water is drawn from the pit rather than from the river directly. If this is not possible, limit pumping within the river to off-channel locations that do not connect to the river during high spring flows.
- If water cannot be drawn using the measures above and the pump head will be located in the river channel where larval fish are known to occur, the following measures apply:
 - Avoid pumping from low-flow or no-flow areas as these habitats tend to concentrate larval fish
 - Avoid pumping to the greatest extent possible, during that period of the year when larval fish may be present (see previous bullet); and
 - Avoid pumping, to the greatest extent possible, during the midnight hours (10:00 p.m. to 2:00 a.m.) as larval drift studies indicate that this is a period of greatest daily activity. Dusk is the preferred pumping time, as larval drift abundance is lowest during this time.
 - Screen all pump intakes with 3/32-inch mesh material.
- Report any fish impinged on the intake screen to the FWS office (801.975.3330) and the:
Utah Division of Wildlife Resources
Northeastern Region
318 N Vernal Ave.
Vernal, UT 84078
(435) 781-9453

Air Quality

- All internal combustion equipment will be kept in good working order.
- Water or other approved dust suppressants will be used at construction sites and along roads, as determined appropriate by the Authorized Officer. Dust suppressant such as magnesium chloride or fresh water may be used, as needed, during the drilling phase.
- Open burning of garbage or refuse will not occur at well sites or other facilities.
- Drill rigs will be equipped with Tier II or better diesel engines.

- Low bleed pneumatics will be installed on separator dump valves and other controllers.
- During completion, no venting will occur, and flaring will be limited as much as possible. Production equipment and gathering lines will be installed as soon as possible.
- Telemetry will be installed to remotely monitor and control production.
- When feasible, two or more rigs (including drilling and completion rigs) will not be run simultaneously within 200 meters of each other. If two or more rigs must be run simultaneously within 200 meters of each other, then effective public health buffer zones out to 200 meters (m) from the nearest emission source will be implemented. Examples of an effective public health protection buffer zone include the demarcation of a public access exclusion zone by signage at intervals of every 250 feet that is visible from a distance of 125 feet during daylight hours, and a physical buffer such as active surveillance to ensure the property is not accessible by the public during drilling operations. Alternatively, the proponent may demonstrate compliance with the 1-hour NO₂ National Ambient Air Quality Standards (NAAQS) with appropriate and accepted near-field modeling. As part of this demonstration, the proponent may propose alternative mitigation that could include but is not limited to natural gas-fired drill rigs, installation of NO_x controls, time/use restrictions, and/or drill rig spacing.
- All new and replacement internal combustion gas field engines of less than or equal to 300 design-rated horsepower must not emit more than 2 grams of NO_x per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower-hour.
- All new and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 grams of NO_x per horsepower-hour.
- Green completions will be used for all well completion activities where technically feasible.

**DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

SITE SPECIFIC DOWNHOLE COAs:

- Production casing cement shall be brought up and into the surface.
- Surface casing cement shall be brought to surface.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to BLM_UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- For information regarding production reporting, contact the Office of Natural Resources Revenue (ONRR) at www.ONRR.gov.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of

the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of

the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

RECEIVED

FORM APPROVED
OMB No. 1004-0136
Expires July 31, 2010UNITED STATES
DEPARTMENT OF THE INTERIOR APR 10 2014
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. 20G0005500
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name UINTAH AND OURAY
2. Name of Operator BILL BARRETT CORPORATION Contact: VENESSA LANGMACHER E-Mail: vlangmacher@billbarrettcorp.com		7. If Unit or CA Agreement, Name and No.
3a. Address 1099 18TH STREET SUITE 2300 DENVER, CO 80202		8. Lease Name and Well No. LC TRIBAL 13-25D-46
3b. Phone No. (include area code) Ph: 303.312.8172 Fx: 303.291.0420		9. API Well No. 4301353068
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SESW 895FSL 1963FWL 40.099236 N Lat, 110.514028 W Lon At proposed prod. zone SWSW 808FSL 1280FWL 40.099000 N Lat, 110.516469 W Lon		10. Field and Pool, or Exploratory ALTAMONT
14. Distance in miles and direction from nearest town or post office* 17.9 MILES SOUTHWEST OF DUCHESNE, UT		11. Sec., T., R., M., or Blk. and Survey or Area Sec 25 T4S R6W Mer UBM
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 808'	16. No. of Acres in Lease 124793.50	12. County or Parish DUCHESNE
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. NONE	19. Proposed Depth 7710 MD 7595 TVD	13. State UT
21. Elevations (Show whether DF, KB, RT, GL, etc.) 7026 GL	22. Approximate date work will start	17. Spacing Unit dedicated to this well 640.00
23. Estimated duration		20. BLM/BIA Bond No. on file LPM8874725

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature (Electronic Submission)	Name (Printed/Typed) VENESSA LANGMACHER Ph: 303.312.8172	Date 04/10/2014
Title SENIOR PERMIT ANALYST		
Approved by (Signature) 	Name (Printed/Typed) Jerry Kenczka	AUG 26 2014
Title Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE	

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

CONDITIONS OF APPROVAL ATTACHED

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #241919 verified by the BLM Well Information System
For BILL BARRETT CORPORATION, sent to the Vernal
Committed to AFMSS for processing by ROBIN R. HANSEN on 04/14/2014 (14RRH4084AE)

NOTICE OF APPROVAL

** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED **

NO NOS



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: BILL BARRETT CORPORATION
Well No: LC TRIBAL 13-25D-46
API No: 43-013-53068

Location: SESW, Sec. 25, T4S, R6W
Lease No: 2OG0005500
Agreement: N/A

OFFICE NUMBER: (435) 781-4400

OFFICE FAX NUMBER: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Construction Activity
(Notify Ute Tribe Energy & Minerals
Dept. and BLM Environmental
Scientist)

- The Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist shall be notified at least 48 hours in advance of any construction activity. The Ute Tribal office is open Monday through Thursday.

Construction Completion
(Notify Ute Tribe Energy & Minerals
Dept. and BLM Environmental
Scientist)

- Upon completion of the pertinent APD/ROW construction, notify the Ute Tribe Energy & Minerals Dept. for a Tribal Technician to verify the Affidavit of Completion. Notify the BLM Environmental Scientist prior to moving on the drilling rig.

Spud Notice
(Notify BLM Petroleum Engineer)

- Twenty-Four (24) hours prior to spudding the well.

Casing String & Cementing
(Notify BLM Supv. Petroleum Tech.)

- Twenty-Four (24) hours prior to running casing and cementing all casing strings to: blm_ut_vn_opreport@blm.gov.

BOP & Related Equipment Tests
(Notify BLM Supv. Petroleum Tech.)

- Twenty-Four (24) hours prior to initiating pressure tests.

First Production Notice
(Notify BLM Petroleum Engineer)

- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

Company/Operator: Bill Barrett Corporation
Well Name(s) & Number(s): LC Tribal 7-20D-45, 11-19D-46, 4-22D-46, 16-22D-46, 7-24D-46,
7-25D-46 and 13-25D-46
Surface Ownership: Ute Indian Tribe
Lease Number: 2OG0005500 and 1420H626298
Locations: Sec. 20, T4S, R5W UBM
Sec. 19, 22, 24 and 25 T4S, R6W UBM

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COA's)**

Additional Conditions of Approval:

LC Tribal 7-20D-45

- One minimum 24" culvert will be installed at the pad entrance.
- Extend topsoil around to corners 6, 8, and 1 in a discontinuous pile within the 25 foot surface use perimeter.
- Production equipment is to be located at corner 3 in order to maximize interim reclamation.

LC Tribal 11-19D-46

- Extend topsoil around well pad in a discontinuous topsoil pile within the 25 foot surface use perimeter.
- Armor toe of fill slope to minimize erosion potential.
- Production equipment is to be located at corner 6 in order to maximize interim reclamation.

LC Tribal 4-22D-46

- Extend topsoil around corners 4, 6 and 8 in a discontinuous topsoil pile within the 25 foot surface use perimeter.
- Double line the pit to account for minor fill areas in the pit.
- Armor bottom of fill slopes between corners 2 and 8 to reduce erosion potential.
- Production equipment is to be located at corner 6 in order to maximize interim reclamation.

LC Tribal 16-22D-46

- Shorten the laydown side of the well pad (corners 6-8) 20 feet to raise the pad and keep cut and fill under 25 feet.
- Shorten reserve pit side of well pad (corners c and d) 10 feet and deepen pit to 10 feet in order to keep pit out of the fill slope while maintaining volume.
- Production equipment will be located at corner 3 in order to maximize interim reclamation.
- Extend topsoil around well pad in a discontinuous topsoil pile within the 25 foot surface use perimeter.

LC Tribal 7-24D-46

- Four minimum 24" culverts will be installed along the access road.
- Extend topsoil around well pad in a discontinuous topsoil pile within the 25 foot surface use perimeter.
- Armor topsoil side of the diversion ditch to minimize erosion potential.

- Production equipment is to be located at corner 6 in order to maximize interim reclamation.

LC Tribal 7-25D-46

- One minimum 24" culvert will be installed at the pad entrance.
- Extend topsoil around well pad in a discontinuous topsoil pile within the 25 foot surface use perimeter.
- Re-route drainage around well pad
- Production equipment is to be located at corner 3 in order to maximize interim reclamation.

LC Tribal 13-25D-46

- Extend spoils pile around corner 4 in a discontinuous pile within the 25 foot surface use perimeter.
- Extend topsoil around corners 1, 2 and 6 in a discontinuous topsoil pile within the 25 foot surface use perimeter.
- Production equipment is to be located at corner 3 in order to maximize interim reclamation.

General Conditions of Approval:

- Install silt fences as necessary to reduce erosion.
- All Production Equipment will be painted Beetle Green to help blend into the surrounding vegetation and meet VRM type objectives.
- The production equipment will be placed towards the front of the pad to maximize interim reclamation efforts on all well pads where applicable.
- See Exhibit One of the approved EA U&O-FY13-Q4-134 for any additional mitigation measures that will be followed for this proposed action.
- All site specific mitigation measures attached to the Applications for Permit to Drill, specifically those found at the beginning of the surface use plan of operations will be required and followed as indicated.
- Several pipeline right-of-way(s) shall be approved. Upon completion of each pipeline in corridor, they shall be identified and filed with the Ute Tribe.
- The Ute Tribe Energy & Minerals Department is to be notified, in writing 48 hours prior to construction of pipelines.
- Construction Notice shall be given to the department on the Ute Tribe workdays, which are Monday through Thursday. The Company understands that they may be responsible for costs incurred by the Ute Tribe after hours.
- The Company shall inform contractors to maintain construction of pipelines within the approved ROW's.
- The Company shall assure the Ute Tribe that "ALL CONTRACTORS, INCLUDING SUB-CONTRACTORS, LEASING CONTRACTORS, AND ETC." have acquired a current and valid Ute Tribal Business License and have "Access Permits" prior to construction, and will have these permits in all vehicles at all times.

- You are hereby notified that working under the "umbrella" of a company does not allow you to be in the field, and can be subject to those fines of the Ute Tribe Severance Tax Ordinance.
- In the event of any deviation from the submitted APD's and ROW applications the Company will notify the Ute Tribe and BIA in writing and will receive written authorization of any such change with appropriate authorization.
- Bill Barrett Corporation will implement a "Safety and Emergency Plan." The Company's safety director will ensure its compliance.
- All Company employees and/or authorized personnel (sub-contractors) in the field will have approved applicable APD's, COA's, and/or ROW permits/authorizations on their person(s) during all phases of construction.
- All vehicular traffic, personnel movement, construction/restoration operations should be confined to the area examined and approved, and to the existing roadways and/or evaluated access routes.
- The personnel from the Ute Tribe Energy & Minerals Department should be notified should cultural remains from subsurface deposits be exposed or identified during construction. All construction will cease.
- Upon completion of Application for Corridor Right-Way, the company will notify the Ute Tribe Energy & Minerals Department, so that a Tribal Technician can verify Affidavit of Completion.

**DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

SITE SPECIFIC DOWNHOLE COAs:

- LC Tribal: 13-25D-46, 7-25D-46, 7-24D-46
- Site Specific Drilling Plan COA's:
 - 1. A formation integrity test shall be performed at the surface casing shoe.
 - 2. To effectively protect useable water, cement for the long string is required to be brought 200 feet above the surface casing shoe.
 - 3. A bowl diverter system, which is connected and discharges to a panic or choke blooie line, shall be installed while drilling of the surface hole section.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**

- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well by CD (compact disc). This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- For information regarding production reporting, contact the Office of Natural Resources Revenue (ONRR) at www.ONRR.gov.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if

performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-64805
1. TYPE OF WELL Oil Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052		8. WELL NAME and NUMBER: GMBU G-13-9-16
PHONE NUMBER: 435 646-4825 Ext		9. API NUMBER: 43013528680000
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1974 FNL 0835 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNW Section: 13 Township: 09.0S Range: 16.0E Meridian: S		9. FIELD and POOL or WILDCAT: MONUMENT BUTTE
		COUNTY: DUCHESNE
		STATE: UTAH

11.

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 3/4/2015	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> WILDCAT WELL DETERMINATION <input type="checkbox"/> OTHER
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>
<input type="checkbox"/> SPUD REPORT Date of Spud:	
<input type="checkbox"/> DRILLING REPORT Report Date:	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield proposes to extend the Application for Permit to Drill this well.

Approved by the
February 02, 2015
Oil, Gas and Mining

Date: _____
By:

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 1/28/2015	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013528680000

API: 43013528680000

Well Name: GMBU G-13-9-16

Location: 1974 FNL 0835 FWL QTR SWNW SEC 13 TWNP 090S RNG 160E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 3/4/2014

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☒ Yes ☐ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Mandie Crozier

Date: 1/28/2015

Title: Regulatory Tech Representing: NEWFIELD PRODUCTION COMPANY

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-64805
1. TYPE OF WELL Oil Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052		8. WELL NAME and NUMBER: GMBU G-13-9-16
PHONE NUMBER: 435 646-4825 Ext		9. API NUMBER: 43013528680000
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1974 FNL 0835 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNW Section: 13 Township: 09.0S Range: 16.0E Meridian: S		9. FIELD and POOL or WILDCAT: MONUMENT BUTTE
		COUNTY: DUCHESNE
		STATE: UTAH

11.

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 3/4/2016	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> WILDCAT WELL DETERMINATION <input type="checkbox"/> OTHER
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>
<input type="checkbox"/> SPUD REPORT Date of Spud:	
<input type="checkbox"/> DRILLING REPORT Report Date:	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield proposes to extend the Application for Permit to Drill this well.

Approved by the
February 08, 2016
Oil, Gas and Mining

Date: _____
By:

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 2/4/2016	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013528680000

API: 43013528680000

Well Name: GMBU G-13-9-16

Location: 1974 FNL 0835 FWL QTR SWNW SEC 13 TWNP 090S RNG 160E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 3/4/2014

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☒ Yes ☐ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Mandie Crozier

Date: 2/4/2016

Title: Regulatory Tech Representing: NEWFIELD PRODUCTION COMPANY

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

JUN 23 2016

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010

APD

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.

BLM VERNAL

5. Lease Serial No.
UTU64805
6. Indian, Allottee or Tribe Name**SUBMIT IN TRIPLICATE - Other instructions on reverse side.**7. If Unit or CA/Agreement, Name and/or No.
UTU87538X

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other8. Well Name and No.
GMBU G-13-9-16

2. Name of Operator

NEWFIELD PRODUCTION COMPANY

Contact: MANDIE CROZIER

E-Mail: MCROZIER@NEWFIELD.COM

9. API Well No.
43-013-52868

3a. Address

ROUTE 3 BOX 3630
MYTON, UT 84052

3b. Phone No. (include area code)

Ph: 435-646-4825

10. Field and Pool, or Exploratory
MONUMENT BUTTE

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 13 T9S R16E Mer SLB SWNW 1974FNL 835FWL

11. County or Parish, and State
DUCHESNE COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original A
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	PD

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Newfield proposes to extend the Application for Permit to Drill this well.
The APD was approved on 08/05/2014. ✓

N-2014-194EA

CONDITIONS OF APPROVAL ATTACHED

VERNAL FIELD OFFICE	
ENG.	RPP 9/9/16
GEOL.	_____
E.S.	_____
PET.	_____
A.M.	_____

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #343044 verified by the BLM Well Information System
For NEWFIELD PRODUCTION COMPANY, sent to the Vernal
Committed to AFMSS for processing by C. BETH HAMANN on 06/24/2016 ()

Name (Printed/Typed) MANDIE CROZIER

Title REGULATORY SPECIALIST

Signature (Electronic Submission)

Date 06/23/2016

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By

Assistant Field Manager
Title Lands & Mineral ResourcesSEP 14 2016
Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

VERNAL FIELD OFFICE
Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

16213H0270 SE

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-64805
1. TYPE OF WELL Oil Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052		8. WELL NAME and NUMBER: GMBU G-13-9-16
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1974 FNL 0835 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNW Section: 13 Township: 09.0S Range: 16.0E Meridian: S		9. API NUMBER: 43013528680000
PHONE NUMBER: 435 646-4825 Ext		9. FIELD and POOL or WILDCAT: MONUMENT BUTTE
COUNTY: DUCHESNE		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 3/4/2017 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </div> <div style="width: 33%;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </div> <div style="width: 33%;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/> </div> </div>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. <div style="display: flex; justify-content: space-between;"> <div style="width: 60%;"> <p style="text-align: center;">Newfield proposes to extend the Application for Permit to Drill this well.</p> </div> <div style="width: 35%; text-align: right;"> <p style="color: red; font-weight: bold;">Approved by the February 09, 2017 Oil, Gas and Mining</p> <p style="color: red; font-weight: bold;">Date: _____</p> <p style="color: red; font-weight: bold;">By: </p> </div> </div>		
NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 2/6/2017	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013528680000

API: 43013528680000

Well Name: GMBU G-13-9-16

Location: 1974 FNL 0835 FWL QTR SWNW SEC 13 TWNP 090S RNG 160E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 3/4/2014

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☒ Yes ☐ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Mandie Crozier

Date: 2/6/2017

Title: Regulatory Tech **Representing:** NEWFIELD PRODUCTION COMPANY