



PHILLIPS PETROLEUM COMPANY

6825 South 5300 West
P.O. Box 851
Price, UT 84501
TEL: (435) 613-9777 FAX: (435) 613-9782

October 26, 2001

Ms. Lisha Cordova
State of Utah
Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
Salt Lake City, Utah 84114-5801

RE: Application for Permit to Drill-
Utah 27-584, NE/4 NE/4 Sec. 27
T. 16S, R. 08E, SLB & M, Emery County, Utah

Dear Ms Cordova:

Enclosed is the original of the *Application for Permit to Drill* (APD). Included with the APD is the following information:

Exhibit "A" – Survey Plat of the Proposed Well Site

Exhibit "B" – Proposed Location Map with Pipeline, Power and Road Access

Exhibit "C" – Drilling Site Layout

Exhibit "D" – Drilling Information

Exhibit "E" – Multipoint Surface Use Plan

Exhibit "F" – Typical Road Cross-Section

Exhibit "G" – BOP Diagram

Exhibit "H" – Typical Wellhead Manifold

Exhibit "I" – Evidence of Bond

COPY

CONFIDENTIAL

This proposed well is located more than 660' from the drilling unit boundary. Well spacing is in accordance with Cause #243-1 which applies to proposed wells outside the Unit Boundary in this area.

Please accept this letter as Phillips Petroleum Company's written request for confidential treatment of all information contained in and pertaining to this permit application, if said information is eligible for such consideration.

Thank you very much for your timely consideration of this application. Please feel free to contact me if you have any questions.

Sincerely,



Jean Semborski
Permitting Analyst

Cc: Mr. Eric Jones, BLM, Moab, Utah
Mr. Chuck Snure, Texaco
Ms. Robin Adams, Dominion Resources
Mr. Don Stephens, BLM, Price, Utah
Ms. Jeannette Borges, Phillips Petroleum
Mr. Dave Levanger, Carbon County Planning and Zoning
Mr. Mark Jones, DOGM
Mrs. Deanna Walker, Phillips Petroleum
PPCo Well File

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING

APPLICATION FOR PERMIT TO DRILL OR DEEPEN		5. Lease Designation and Serial Number: ML-48215	
1A. Type of Work: DRILL <input checked="" type="checkbox"/> DEEPEN <input type="checkbox"/>		6. If Indian, Allottee or Tribe Name: N/A	
B. Type of Well: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER: <input type="checkbox"/> SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>		7. Unit Agreement Name: N/A	
2. Name of Operator: Phillips Petroleum Company		8. Farm or Lease Name: Utah	
3. Address and Telephone Number: 6825 S. 5300 W. P.O. Box 851 Price, Utah 84501 (435) 613-9777		9. Well Number: 27-584	
4. Location of Well (Footages) At Surface: 704' FNL, 975' FEL At Proposed Producing Zone: 4361862H 499555E		10. Field or Pool, or Wildcat: Wildcat	
14. Distance in miles and direction from nearest town or post office: 4.9 Miles northwest of Huntington, Utah		12. County: Emery	13. State: UTAH
15. Distance to nearest property or lease line (feet): 703'	16. Number of acres in lease: 1878.52	17. Number of acres assigned to this well: 160 acres	
18. Distance to nearest well, drilling, completed, or applied for, on this lease (feet): 1600'	19. Proposed Depth: 3598'	20. Rotary or cable tools: Rotary	
21. Elevations (show whether DF, RT, GR, etc.): 6718.3'		22. Approximate date work will start: May 2002	

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
14"	12 3/4"	Conductor	40'	
11"	J-55 8 5/8"	24#/ft	360'	139 sks G+2%CaCl+1/4#/sk flocel
7 7/8"	N-80 5 1/2"	17#/ft	3588'	332 sks 50/50poz8%gel+2%CaCl+10%extender 78 sks "G" thixotropic

DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

*Signed 2-27-02
Jc*

RECEIVED
FEB 27 2002
DIVISION OF
OIL, GAS AND MINING

COPY


CONFIDENTIAL

24. Name & Signature: Jean Semborski Title: Permitting Analyst Date: 10/26/01

(This space for state use only)

API Number Assigned: 43-015-30545 Approval: _____




ELEVATION OF UNGRADED GROUND AT LOCATION STAKE = 6718.3'
 ELEVATION OF GRADED GROUND AT LOCATION STAKE = 6717.8'

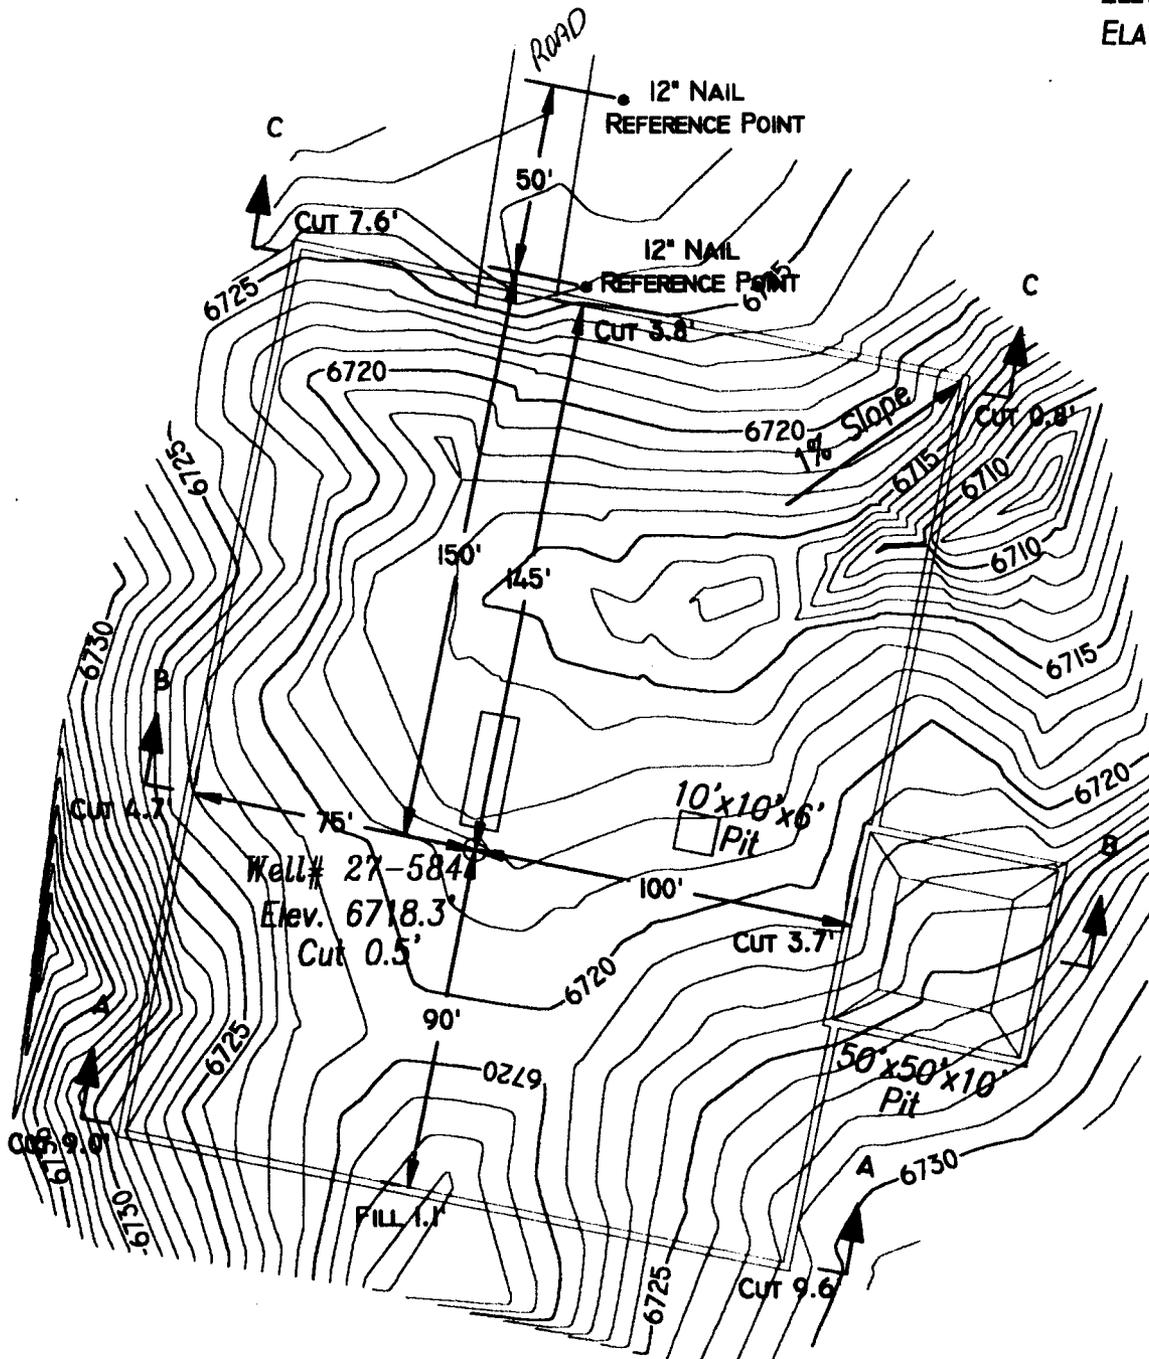


Talon Resources, Inc.
 375 South Carbon Avenue, Suite 101
 Price, Utah 84501
 Ph: 435-637-8781
 Fax: 435-636-8603

PHILLIPS PETROLEUM
 **LOCATION LAYOUT**
 Section 27, T16S, R8E, S.L.B.&M.
WELL #27-584

Drawn By: J. STANSFIELD	Checked By: L.W.J.
Drawing No. A-2	Date: 10/11/01
	Scale: 1" = 50'
Sheet 2 of 4	Job No. 399

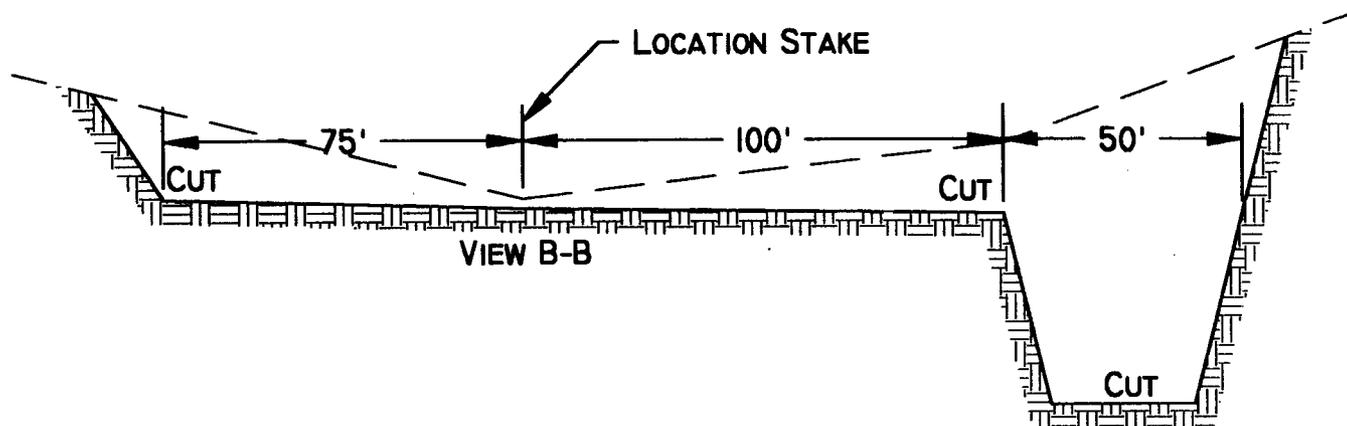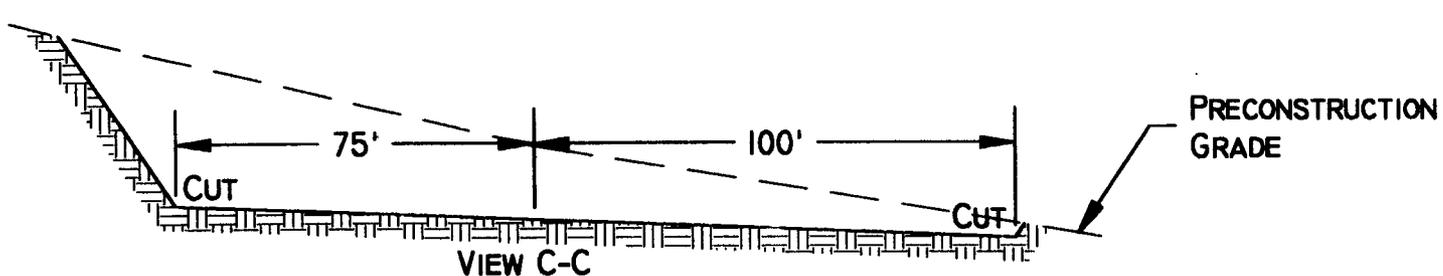

SLOPE = 1 1/2 : 1
(EXCEPT PIT)
PIT SLOPE = 1 : 1

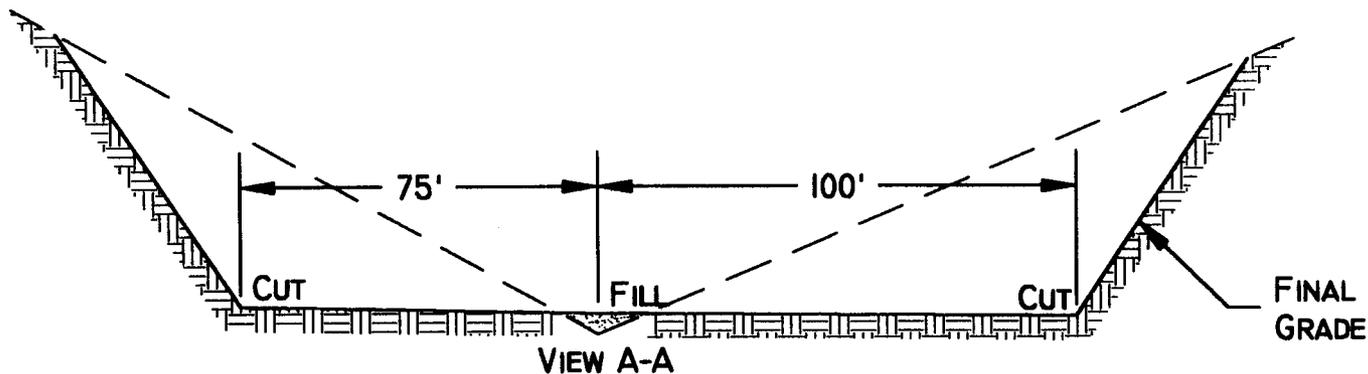

Talon Resources, Inc.
375 South Carbon Avenue, Suite 101
Price, Utah 84501
Ph: 435-637-8781
Fax: 435-636-8603



PHILLIPS PETROLEUM
TYPICAL CROSS SECTION
Section 27, T16S, R8E, S.L.B.&M.
WELL #27-584

Drawn By J. STANSFIELD	Checked By L.W.J.
Drawing No. C-1	Date 00/00/00
	Scale 1" = 40'
Sheet 3 of 4	Job No. 000

APPROXIMATE YARDAGES


CUT

(6") TOPSOIL STRIPPING = 750 CU. YDS.

REMAINING LOCATION = 4,732 CU. YDS.

TOTAL CUT = 6,026 CU. YDS.

TOTAL FILL = 17.5 CU. YDS.

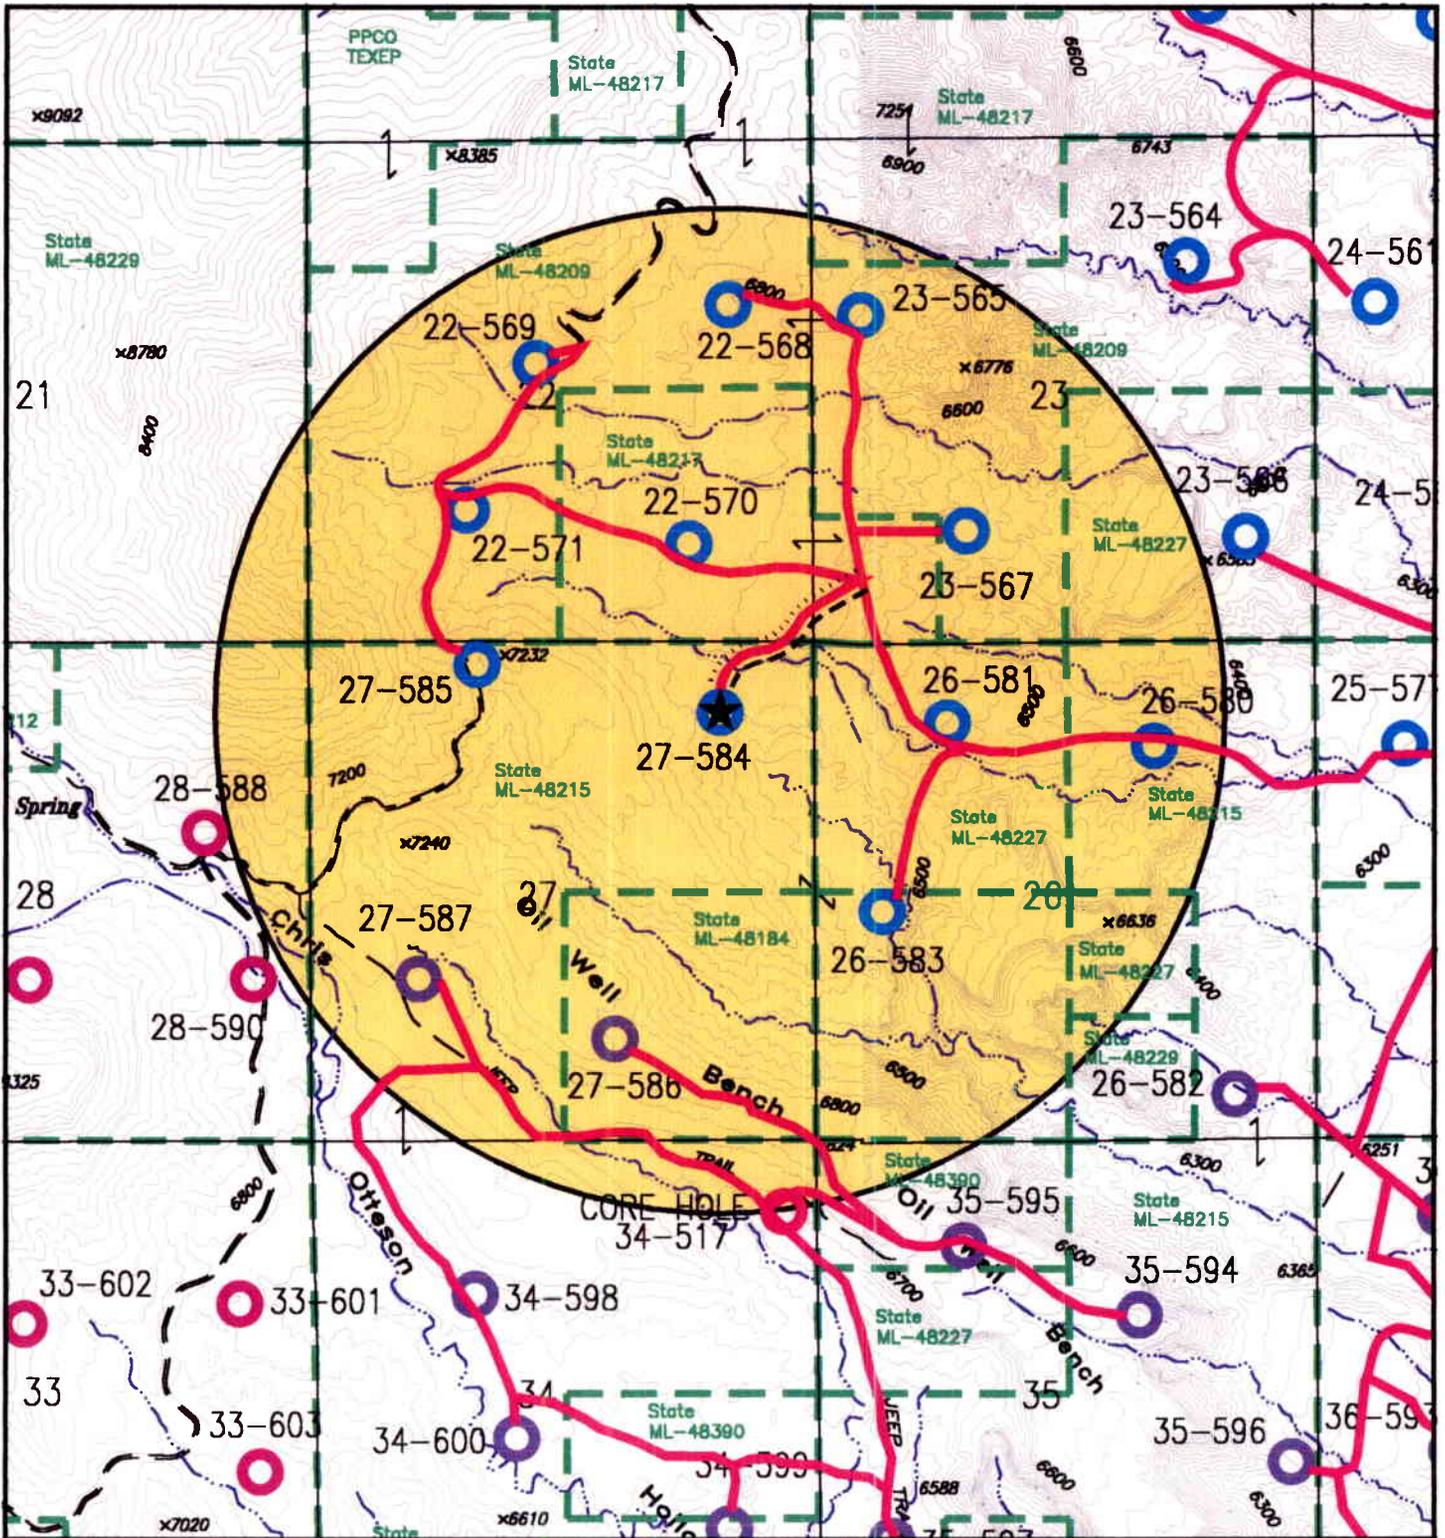

LEGEND


- Proposed Well Location: ★
- Other Proposed Well Locations: ○
- Proposed Powerline: ———
- Proposed Pipeline: ———
- Proposed Roads: ———
- Lease Boundary: ———
- Existing Wells: ○

Scale - 1" = 2000'

PHILLIPS PETROLEUM COMPANY
 6825 South 5300 West
 P.O. Box 851
 Price, Utah 84501
 Phone: (435) 613-9777
 Fax: (435) 613-9782



WELL # 27-584
Section 27, T16S, R8E, S.L.B.&M.
Exhibit B 1 of 2

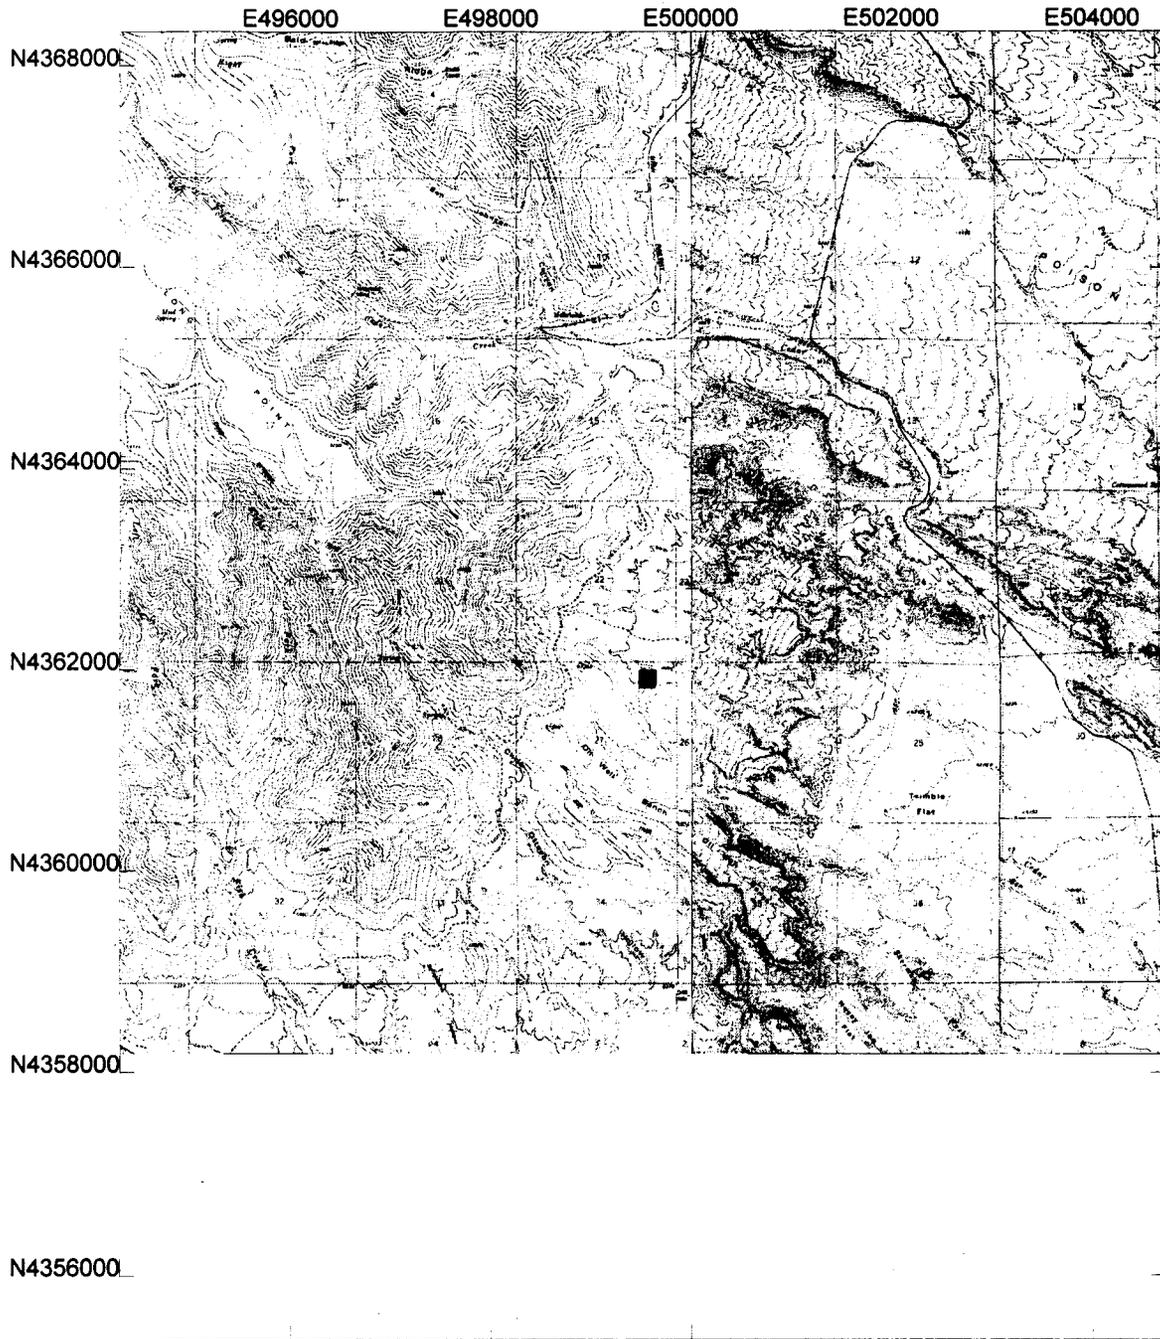

Utah 27-584 Section 27, T16S, R8E

UTM
12 North
NAD 1927 (Conus)




Scale 1:75,000
0 8,000






Feet

15554F.ssf
10/24/2001
GPS Pathfinder[®] Office


APPROXIMATE LAYOUT OF RIG & EQUIPMENT



○ HOLE

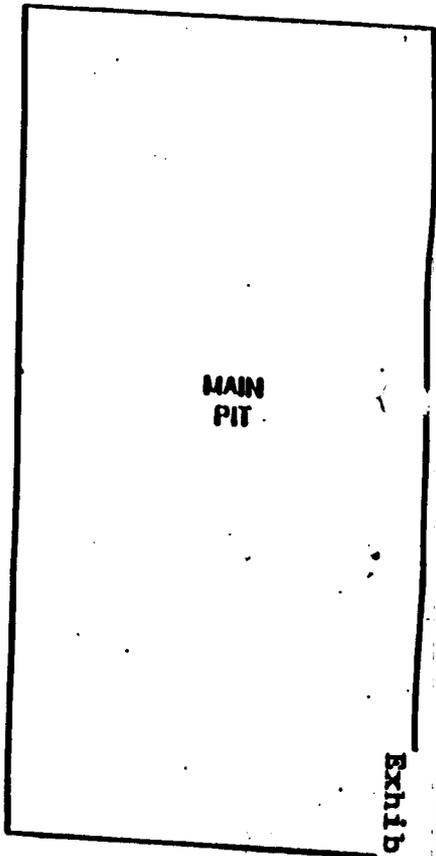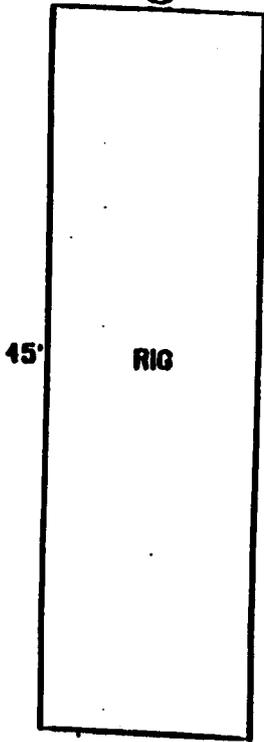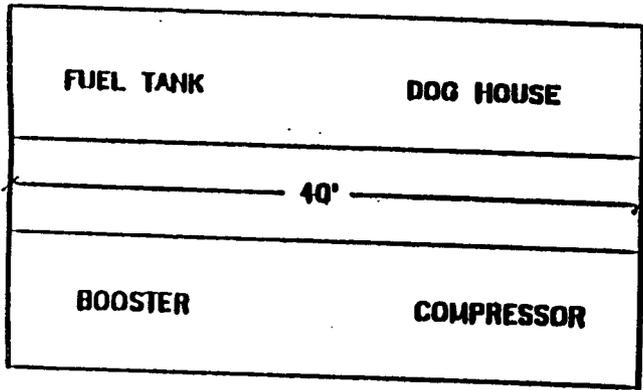

Exhibit

EXHIBIT "D"
DRILLING PROGRAM

Attached to Form 3
Phillips Petroleum Company
Utah 27-584
NE/4, NE/4, Sec. 27, T16S, R08E, SLB & M
704' FNL, 975' FEL
Emery County, Utah

1. The Surface Geologic Formation

Mancos Shale

2. Estimated Tops of Important Geologic Markers

Blue Gate/Ferron 3138'

3. Projected Gas & H2O zones (Ferron Formation)

Coals and sandstones 3163' - 3298'

No groundwater is expected to be encountered.

Casing & cementing will be done to protect potentially productive hydrocarbons, lost circulation zones, abnormal pressure zones, and prospectively valuable mineral deposits. All indications of usable water will be reported.

Surface casing will be tested to 1400 psi.

4. The Proposed Casing and Cementing Programs

<u>HOLE</u> <u>SIZE</u>	<u>SETTING DEPTH</u> <u>(INTERVAL)</u>	<u>SIZE</u> <u>(OD)</u>	<u>WEIGHT, GRADE</u> <u>& JOINT</u>	<u>NEW,</u> <u>USED</u>
14"	40'	12-3/4"	Conductor	New
11"	360'	8-5/8"	24#ST&C	New
7-7/8"	3588'	5-1/2"	17#LT&C	New

Cement Program -Every attempt will be made to bring cement back to surface.

Surface Casing: 139 sks G+2%CaCl+1/4#per sack flocel;15.8#/gal,density, 1.15 cu.ft/sk yield.

Production Casing: 332 sks 50/50 poz 8%gel +2%CaCl+10%extender;12.5#/gal, density, 1.92 cu.ft/sk yield.

78 sks "G" thixotropic, 14.2#/gal density, 1.61 cu.ft/sk yield

The following shall be entered in the driller's log:

- 1) Blowout preventer pressure tests, including test pressures and results;
- 2) Blowout preventer tests for proper functioning;
- 3) Blowout prevention drills conducted;
- 4) Casing run, including size, grade, weight, and depth set;
- 5) How the pipe was cemented, including amount of cement, type, whether cement circulated, location of the cementing tools, etc.;
- 6) Waiting on cement time for each casing string;
- 7) Casing pressure tests after cementing, including test pressures and results.

5. The Operator's Minimum Specifications for Pressure Control

Exhibit "G" is a schematic diagram of the blowout preventer equipment. A double gate 3000 psi BOPE will be used with a rotating head. This equipment will be tested to 2000 psi. All tests will be recorded in a Driller's Report Book. Physical operation of BOP's will be checked on each trip.

6. The Type and Characteristics of the Proposed Circulating Muds

0-300	11" hole	Drill with air, will mud-up if necessary.
300-TD	7 7/8" hole	Drill with air. 400 psi @ 1500-1800 Scf.

7. The Testing, Logging and Coring Programs are as followed

300-TD Gamma Ray, Density, Neutron Porosity, Induction, Caliper

Any Anticipated Abnormal Pressures or Temperatures

No abnormal pressures or temperatures have been noted or reported in wells drilled in the area nor at the depths anticipated in this well. Bottom hole pressure expected is 1558 psi max. No hydrogen sulfide or other hazardous gases or fluids have been found, reported or are known to exist at these depths in the area.

8. Anticipated Starting Date and Duration of the Operations.

The well will be drilled around May 2002.

Verbal and/or written notifications listed below shall be submitted in accordance with instructions from the Division of Oil, Gas & Mining:

- (a) prior to beginning construction;
- (b) prior to spudding;
- (c) prior to running any casing or BOP tests;
- (d) prior to plugging the well, for verbal plugging instructions.

Spills, blowouts, fires, leaks, accidents or other unusual occurrences shall be reported to the Division of Oil, Gas & Mining immediately.

EXHIBIT "E"
MULTIPOINT SURFACE USE PLAN

Attached to Form 3
Phillips Petroleum Company
Utah 27-584
NE/4, NE/4, Sec. 27, T16S, R08E, SLB & M
704' FNL, 975' FEL
Emery County, Utah

1. Existing Roads

- a. We do not plan to change, alter or improve upon any existing state or county roads.
- b. Existing roads will be maintained in the same or better condition. See Exhibit "B".

2. Planned Access

Approximately 2000' of new access is required (See Exhibit "B")

- a. Maximum Width: 24' travel surface with 27' base
- b. Maximum grade: 9%
- c. Turnouts: None
- d. Drainage design: 6 culverts may be required. Water will be diverted around well pad as necessary.
- e. If the well is productive, the road will be surfaced and maintained as necessary to prevent soil erosion and accommodate year-round traffic.
- f. Pipe and Power lines will follow the proposed access road.

3. Location of Existing Wells

- a. See Exhibit "B". There are 12 proposed and 0 existing wells within a one-mile radius of the proposed location.

4. Location of Existing and/or Proposed Facilities

- a. If the well is a producer, installation of production facilities will be as shown on Exhibit "H". Buried powerlines run along access on the east and north, gathering lines on the south or west.
- b. Rehabilitation of all pad areas not used for production facilities will be made in accordance with landowner stipulations.

5. Location and Type of Water Supply

- a. Water to be used for drilling will be purchased from the Price River Water Improvement District (a local source of municipal water) (tel. 435-637-6350).
- b. Water will be transported by truck over approved access roads.
- c. No water well is to be drilled for this location.

6. Source of Construction Materials

- a. Any necessary construction materials needed will be obtained locally and hauled to the location on existing roads.
- b. No construction or surfacing materials will be taken from Federal/Indian land.

7. Methods for handling waste disposal

- a. As the well will be air drilled, a small reserve pit will be constructed with a minimum of one-half the total depth below the original ground surface on the lowest point within the pit. The pit will not be lined unless conditions encountered during construction warrant it or if deemed necessary by the DOGM representative during the pre-site inspection. Three sides of the reserve pit will be fenced within 24 hours after completion of construction and the fourth side within 24 hours after drilling operation cease with woven wire topped with barbed wire to a height of not less than four feet. The fence will be kept in good repair while the pit is drying.
- b. Following drilling, the liquid waste will be evaporated from the pit and the pit back-filled and returned to natural grade. No liquid hydrocarbons will be discharged to the reserve pit or location.
- c. In the event fluids are produced, any oil will be retained in tankage until sold and any water produced will be retained until its quality can be determined. The quality and quantity of the water will determine the method of disposal.
- d. Trash will be contained in a portable metal container and will be hauled from location periodically and disposed of at an approved disposal site. Chemical toilets will be placed on location and sewage will be disposed of at an appropriate disposal site.

8. Ancillary Facilities

- a. We anticipate no need for ancillary facilities with the exception of one trailer to be located on the drill site.

9. Wellsite Layout

- a. Available topsoil will be removed from the location and stockpiled. Location of mud tanks, reserve and berm pits, and soil stockpiles will be located as shown on the attachments.
- b. A blooie pit will be located 100' from the drill hole. A line will be placed on the surface from the center hole to the pit. The pit will not be lined, but will be fenced on four sides to protect livestock/wildlife.
- c. Access to the well pad will be as shown on Exhibit "B".
- d. Natural runoff will be diverted around the well pad.

10. Plans for Restoration of Surface

- a. All surface areas not required for producing operations will be graded to as near original condition as possible and contoured to maintain possible erosion to a minimum.
- b. Available topsoil will be stockpiled and will be evenly distributed over the disturbed areas and the area will be reseeded as prescribed by the landowner.
- c. Pits and any other area that would present a hazard to wildlife or livestock will be fenced off when the rig is released and removed.

11. Surface Ownership:

- a. The wellsite and access road will be constructed on lands owned by the State of Utah, School and Institutional Trust Lands Administration. The operator shall contact the landowner representative and the Division of Oil, Gas and mining 48 hours prior to beginning construction activities.

12. **Other Information:**

- a. The primary surface use is farming and grazing. The nearest dwelling is approximately 26,800 feet northwest.
- b. Nearest live water is Unnamed Spring, located 6700' Southwest.
- c. If there is snow on the ground when construction begins, it will be removed before the soil is disturbed and piled downhill from the topsoil stockpile location.
- d. The backslope and foreslope will be constructed no steeper than 4:1.
- e. All equipment and vehicles will be confined to the access road and well pad.
- f. A complete copy of the approved Application for Permit to Drill (APD) including conditions and stipulations, shall be on the wellsite during construction and drilling operations

There will be no deviation from the proposed drilling and/or workover program without prior approval from the Division of Oil, Gas & Mining.

13. Company Representative

Jean Semborski
Permitting Specialist
Phillips Petroleum Company
6825 S. 5300 W. P.O. Box 851
Price, Utah 84501
(435) 613-9777
(435) 820-9807

Mail Approved A.P.D. To:

Company Representative

Excavation Contractor

Nelco Contractors Inc.
Larry Jensen
(435) 637-3495
(435) 636-5268


14. Certification

I hereby certify that I, or persons under my direct supervision have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct, and that the work associated with the operations proposed herein will be performed by Phillips Petroleum Company and its subcontractors in conformity with this plan and the terms and conditions under which it is approved.

10/26/01
Date


Jean Semborski
Permitting Analyst
Phillips Petroleum Company


○ ANCHOR (TYP. 4 PL.)

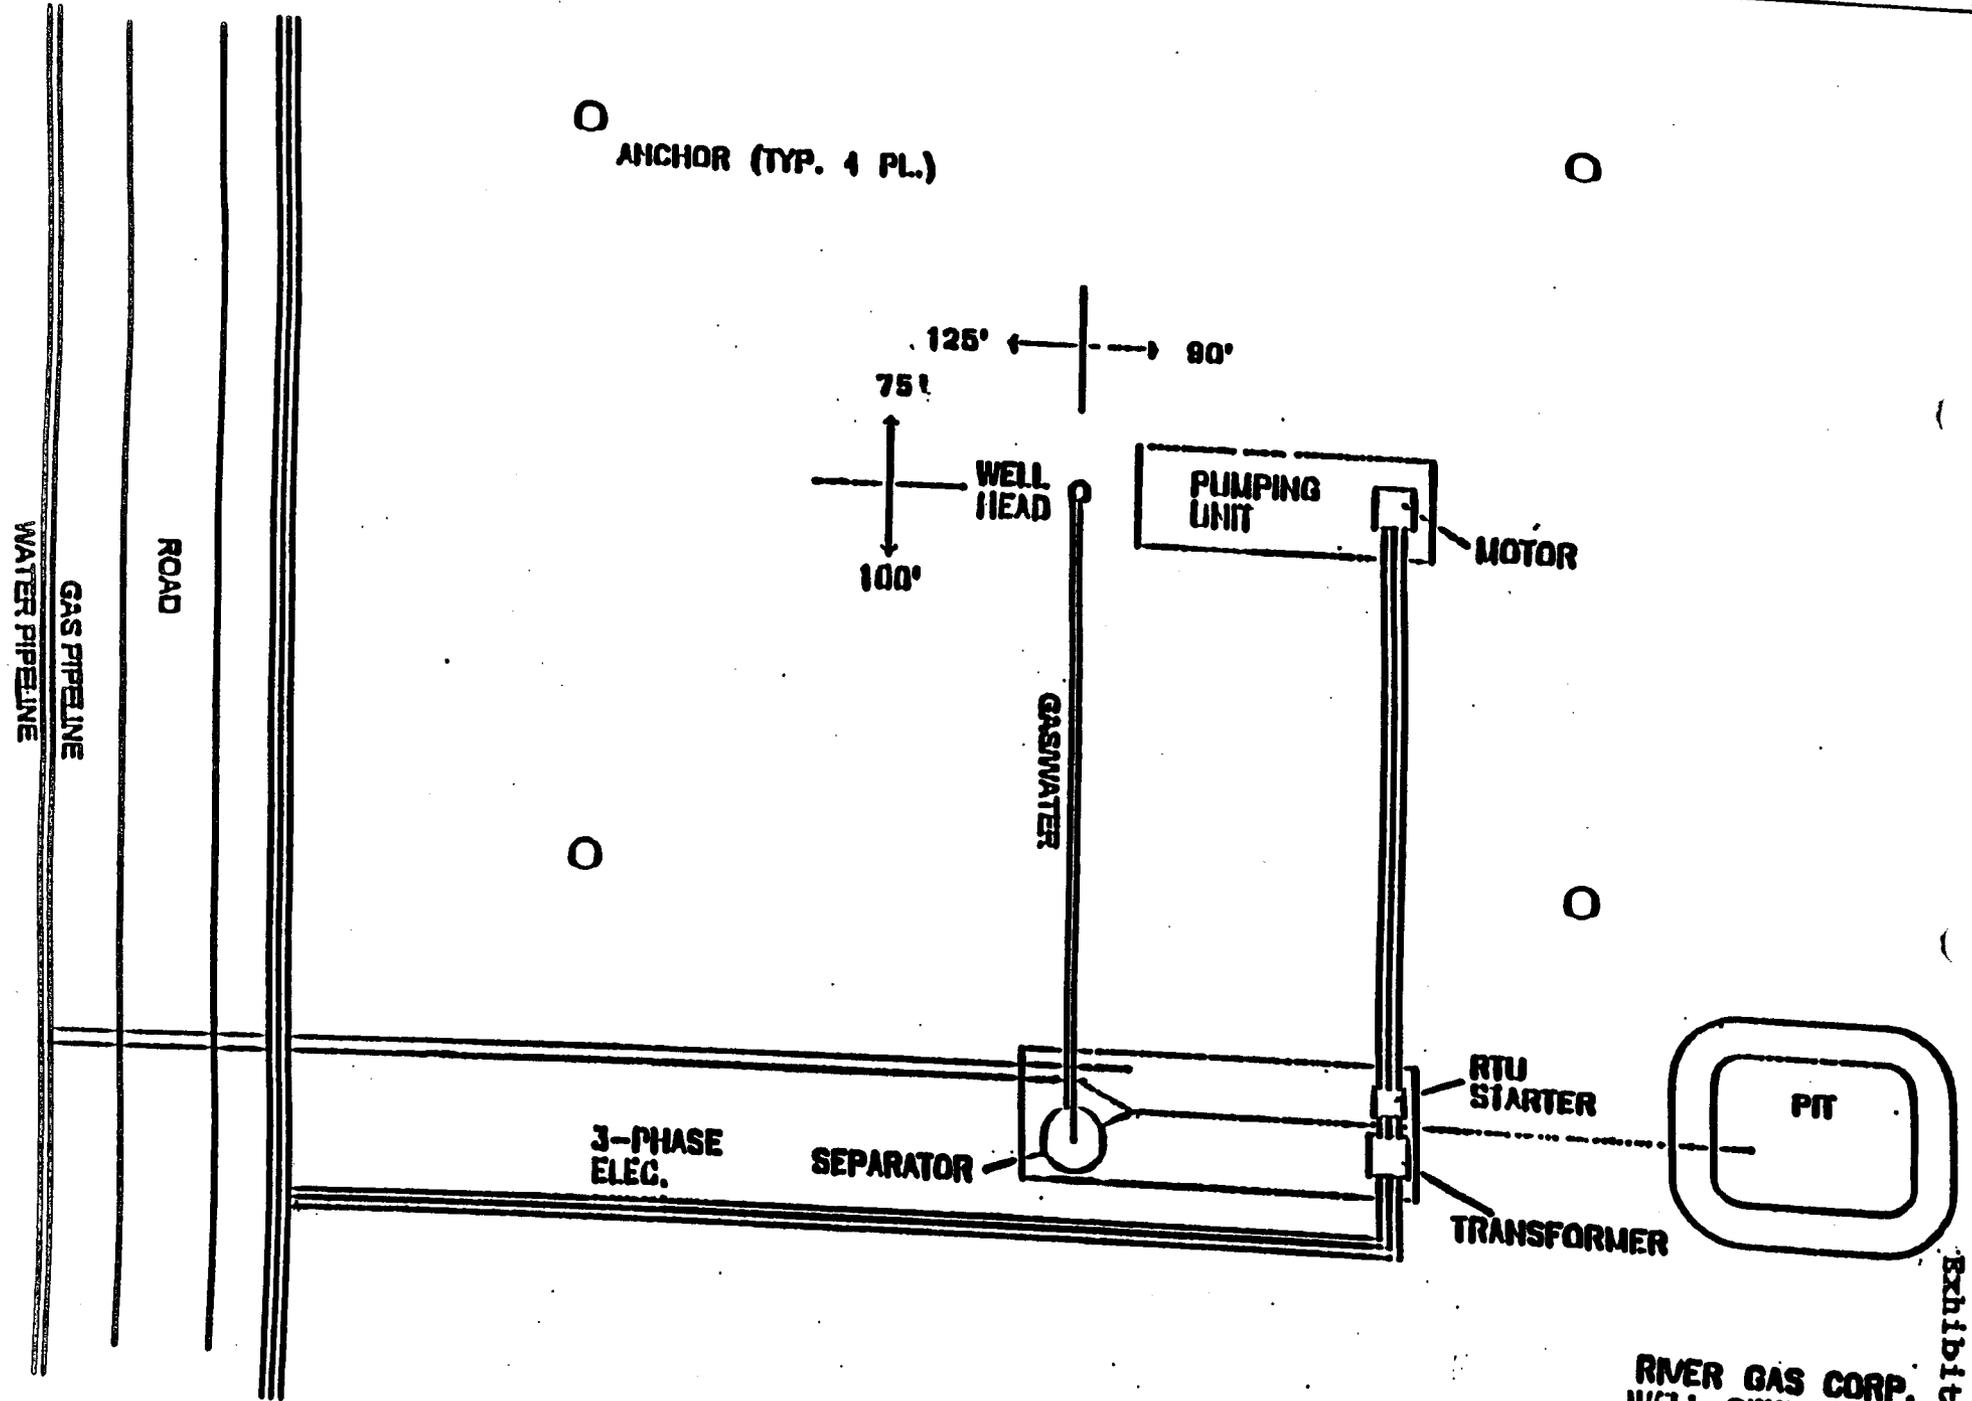


RIVER GAS CORP.
WELL SITE LAYOUT
215' X 175'

Exhibit

TYPICAL ROAD CROSS-SECTION

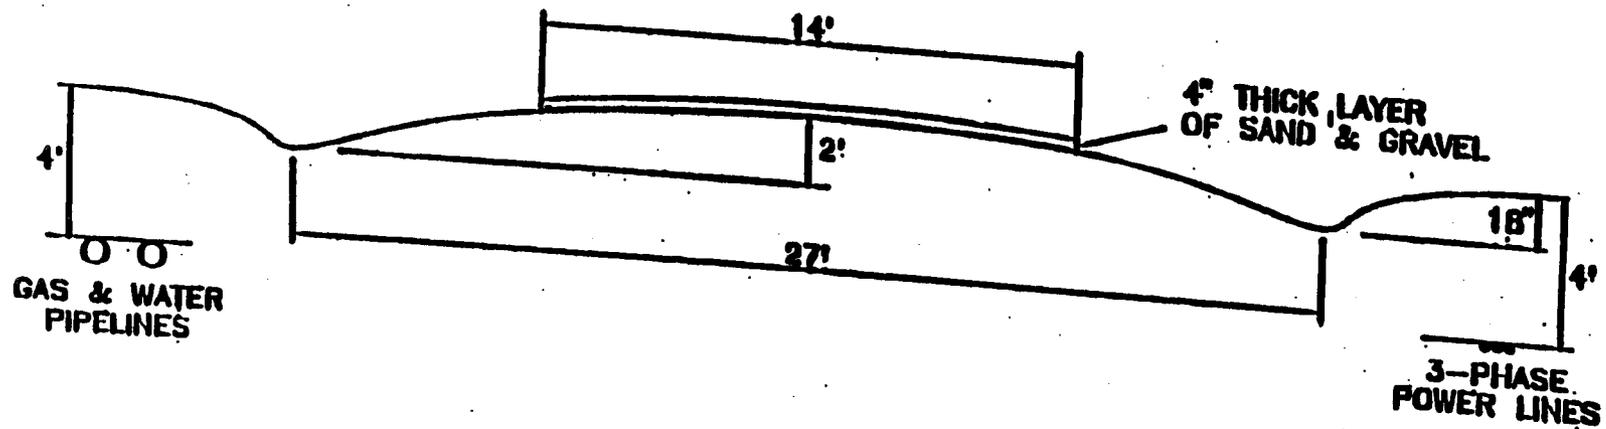


DIVERTER HEAD

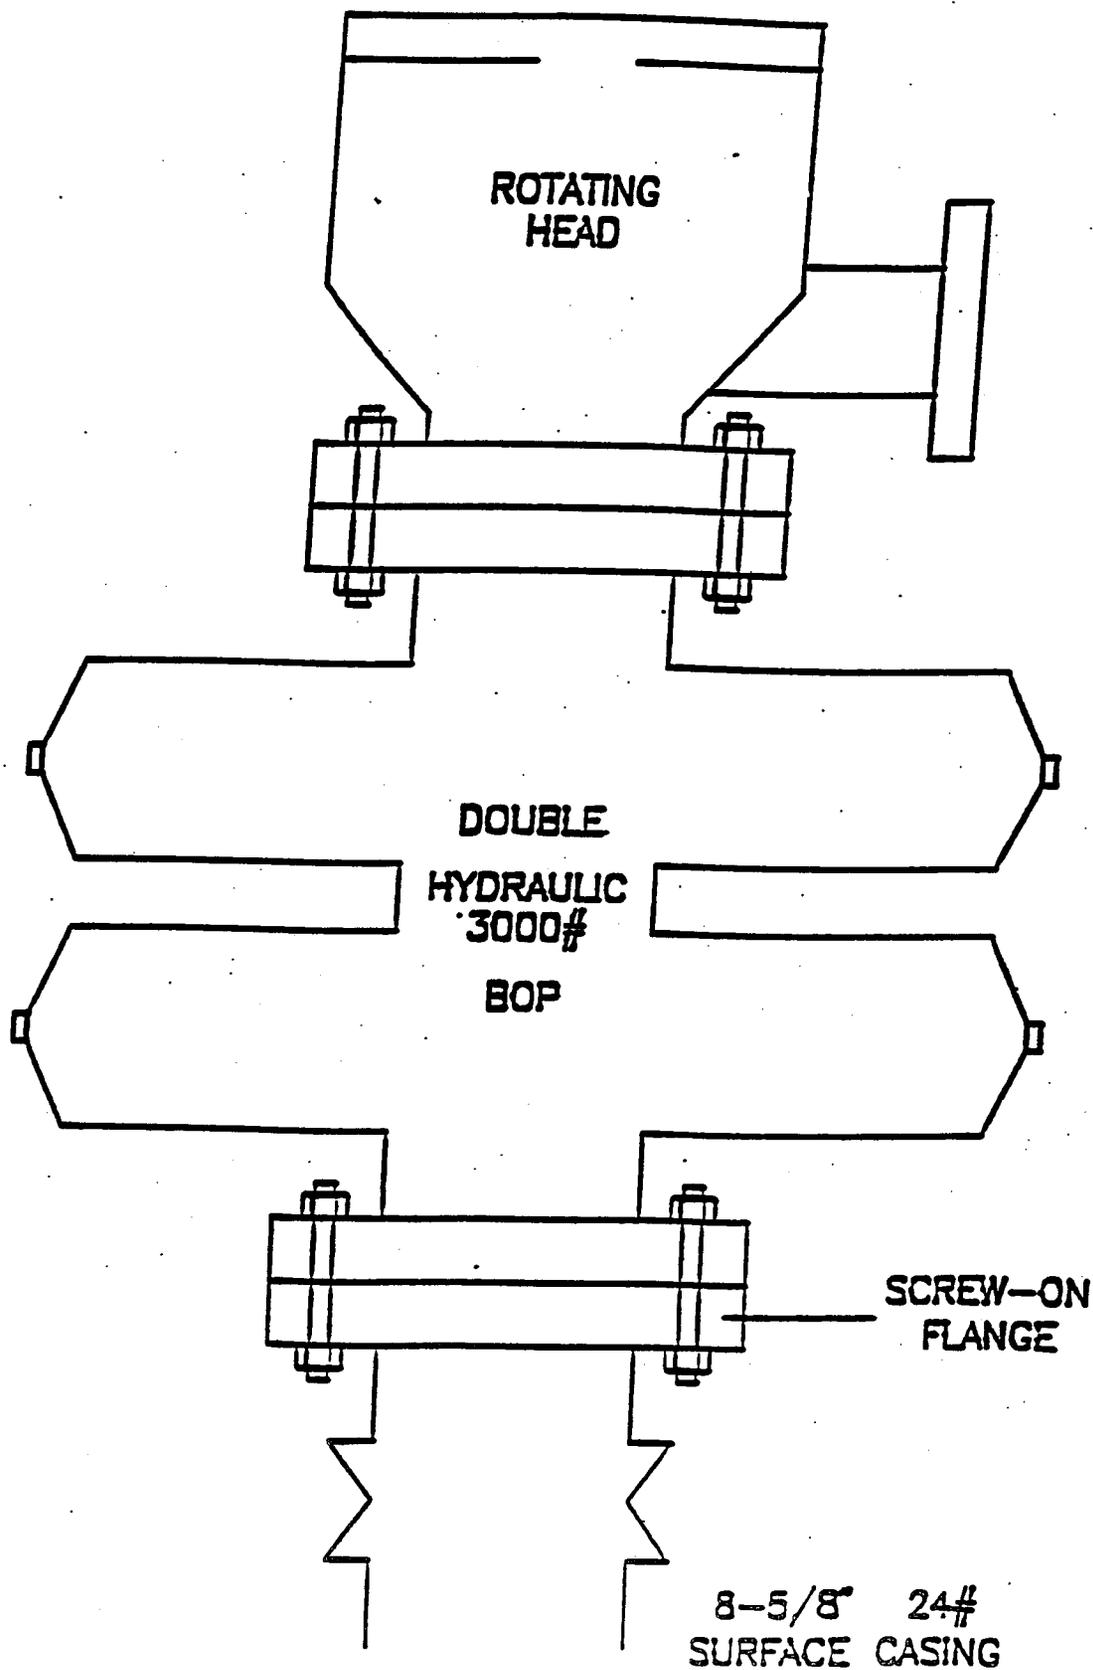

- (1) 2" 5M FLANGED CHOKE
- (2) 2" 5M GATE VALVE (FLANGED)
- (3) 2" 5M STUDDED CROSS
- (4) 2" 5M GATE VALVE (FLANGED)
- (5) 2" 5M FLANGED CHOKE
- (6) 2" 5M GATE VALVE (FLANGED)
- (7) 2" LINE
- (8) 2" 5M GATE VALVE (FLANGED)
- (9) 3000# GAUGE

NOTE:
NUMBER 8 GATE VALVE
SITS ON TOP OF MANIFOLD
BETWEEN STUDDED CROSS
AND 3000# GAUGE.

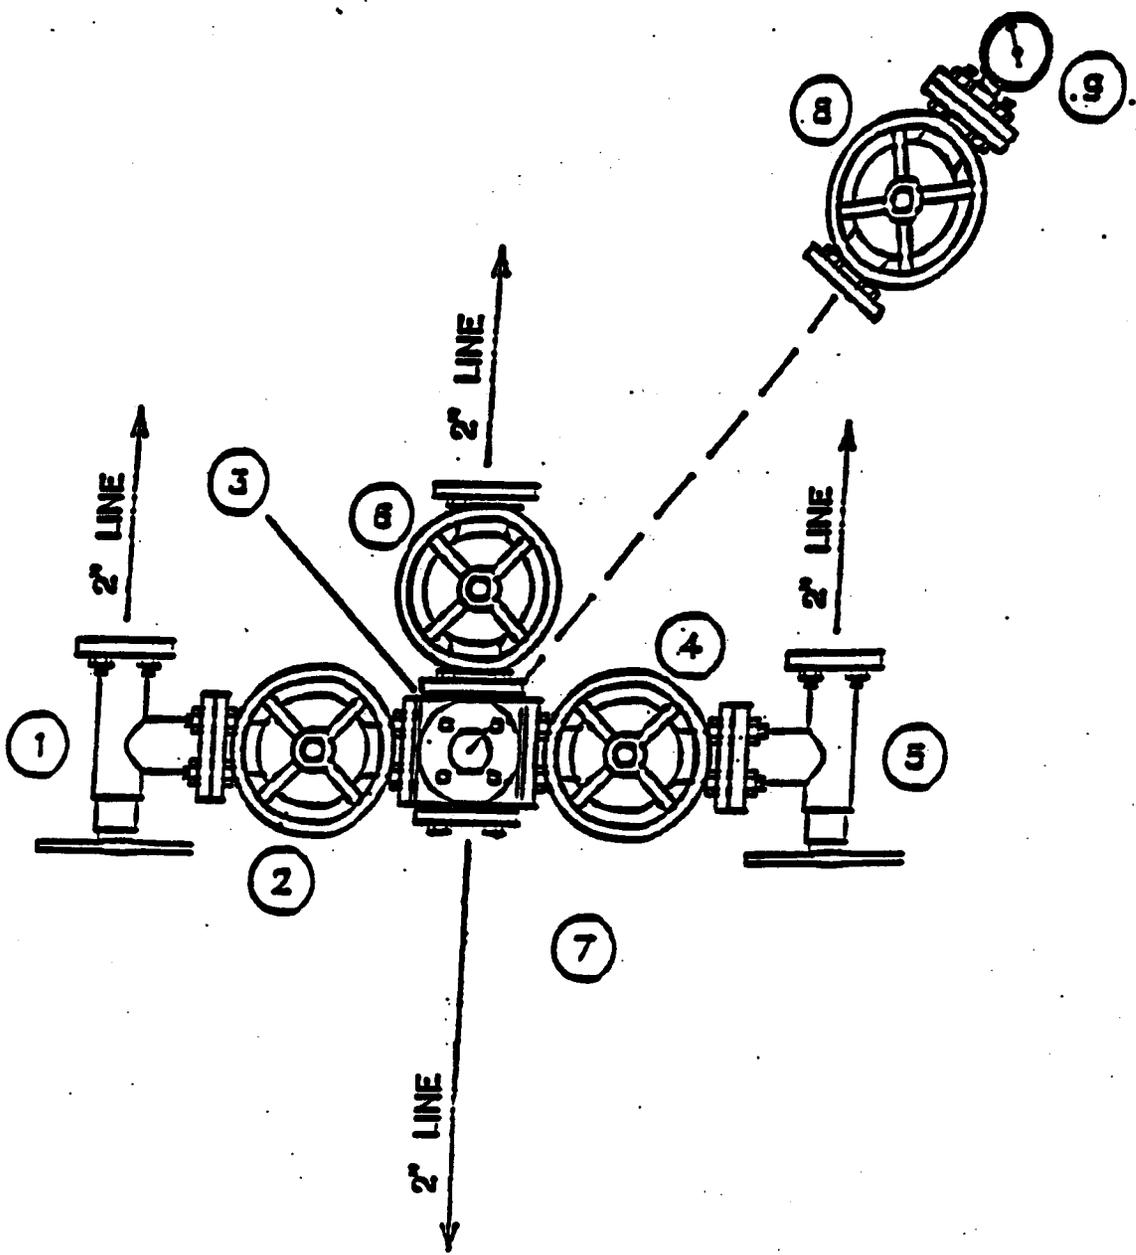

TO BOP
AND A NEW 2" BALL VALVE
FULL OPEN 5000PSI
MANIFOLD

STATE OF UTAH
BOND OF LESSEE

KNOW ALL MEN BY THESE PRESENTS, that we Phillips Petroleum Company
of Bartlesville, Oklahoma as principal and
Safeco Insurance Company of America as surety, are held and firmly bound
unto the State of Utah in the sum of Two Hundred Thousand Dollars (\$200,000.00) lawful money of the United States
to be paid to the School & Institutional Trust Lands Administration, as agent for the State of Utah, for the use and benefit
of the State of Utah, and of any patentee or purchaser of any portion of the land covered by the hereinafter described
lease heretofore sold or which may hereafter be sold with a reservation to the State of Utah, on the surface or of other
mineral deposits of any portion of such lands, for which payment, well and truly to be made, we bind ourselves, and each
of us, and each of our heirs, executors, administrators, successors, sublessees, and assignees, jointly and severally by
these presents.

Signed with our hands and seals this 31st day of January, 192001

The condition of the foregoing obligation is such that,

WHEREAS: The State of Utah, as Lessor, issued a(n) _____
lease, Lease Number _____ and dated _____, to _____
as lessee (and said lease has been duly assigned under date of _____
to _____) to drill for, mine, extract, and remove all of the _____
deposits in and under the following described lands, to wit:

Statewide Blanket Bond to cover all operations on state of Utah lands.

NOW, THEREFORE, the principal and surety shall be obligated to pay all monies, rentals, royalties, costs of reclamation, damages to the surface and improvements thereon and any other damages, costs, expenses, penalties, interest or liabilities which arise by operation of or in connection with the above described lease(s) accruing to the Lessor and shall fully comply with all other terms and conditions of said lease, the rules, regulations, and policies relating thereto of the School & Institutional Trust Lands Administration, the Board of Oil, Gas and Mining, and the Division of Oil, Gas and Mining as they may now exist or may from time to time be modified or amended. This obligation is in effect even if the principal has conveyed part of its interest to a successor in interest. If the principal fully satisfies the above described obligations, then the surety's obligation to make payment to the State of Utah is void and of no effect. otherwise, it shall remain in full force and effect until released by the School & Institutional Trust Lands Administration.

Signed, sealed and delivered
in the presence of

Jerry L. Hicks
Witness

PHILLIPS PETROLEUM COMPANY

R. B. Gisi (SEAL)
R. B. Gisi Principal Asst. Treasurer

Jerry L. Hicks
Witness

BONDING COMPANY SAFECO INSURANCE COMPANY OF AMERICA

BY Betty G. Miller
Betty G. Miller, Attorney-in-Fact
Attest: [Signature]
Secretary

APPROVED AS TO FORM:
JAN GRAHAM
ATTORNEY GENERAL

Resident Agent: N/A

By [Signature]

Bonding Co. Address: Millenium Corp. Park, Bldg. C, 18400 NE Unic Hill
Redmond, WA 98052
Corporate Seal of Bonding Company Must be Affixed.



POWER OF ATTORNEY

SAFECO INSURANCE COMPANY OF AMERICA
GENERAL INSURANCE COMPANY OF AMERICA
HOME OFFICE SAFECO PLAZA
SEATTLE, WASHINGTON 98105

No. 8718

KNOW ALL BY THESE PRESENTS:

That SAFECO INSURANCE COMPANY OF AMERICA and GENERAL INSURANCE COMPANY OF AMERICA, each a Washington corporation, does each hereby appoint
.....SANDRA L. HABERLY; BETTY J. MILLER, Bartlesville, Oklahoma.....

Its true and lawful attorney(s)-in-fact, with full authority to execute on its behalf fidelity and surety bonds or undertakings and other documents of a similar character issued in the course of its business, and to bind the respective company thereby.

IN WITNESS WHEREOF, SAFECO INSURANCE COMPANY OF AMERICA and GENERAL INSURANCE COMPANY OF AMERICA have each executed and attested these presents

this 27th day of September, 19 93

R.A. Pierson

R.A. PIERSON, SECRETARY

W. Randall Stoddard

W. RANDALL STODDARD, PRESIDENT

CERTIFICATE

Extract from the By-Laws of SAFECO INSURANCE COMPANY OF AMERICA
and of GENERAL INSURANCE COMPANY OF AMERICA:

"Article V, Section 13. - FIDELITY AND SURETY BONDS . . . the President, any Vice President, the Secretary, and any Assistant Vice President appointed for that purpose by the officer in charge of surety operations, shall each have authority to appoint individuals as attorneys-in-fact or under other appropriate titles with authority to execute on behalf of the company fidelity and surety bonds and other documents of similar character issued by the company in the course of its business . . . On any instrument making or evidencing such appointment, the signatures may be affixed by facsimile. On any instrument conferring such authority or on any bond or undertaking of the company, the seal, or a facsimile thereof, may be impressed or affixed or in any other manner reproduced; provided, however, that the seal shall not be necessary to the validity of any such instrument or undertaking."

Extract from a Resolution of the Board of Directors of SAFECO INSURANCE COMPANY OF AMERICA
and of GENERAL INSURANCE COMPANY OF AMERICA adopted July 28, 1970.

"On any certificate executed by the Secretary or an assistant secretary of the Company setting out,

- (i) The provisions of Article V, Section 13 of the By-Laws, and
- (ii) A copy of the power-of-attorney appointment, executed pursuant thereto, and
- (iii) Certifying that said power-of-attorney appointment is in full force and effect.

the signature of the certifying officer may be by facsimile, and the seal of the Company may be a facsimile thereof."

I, R. A. Pierson, Secretary of SAFECO INSURANCE COMPANY OF AMERICA and of GENERAL INSURANCE COMPANY OF AMERICA, do hereby certify that the foregoing extracts of the By-Laws and of a Resolution of the Board of Directors of these corporations, and of a Power of Attorney issued pursuant thereto, are true and correct, and that both the By-Laws, the Resolution and the Power of Attorney are still in full force and effect.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the facsimile seal of said corporation

this 31st day of January, 192001



R.A. Pierson
R.A. PIERSON, SECRETARY

Registered trademark of SAFECO Corporation.

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 01/04/2002

API NO. ASSIGNED: 43-015-30545

WELL NAME: UTAH 27-584
 OPERATOR: PHILLIPS PETROLEUM (N1475)
 CONTACT: JEAN SEMBORSKI

PHONE NUMBER: 435-613-9777

PROPOSED LOCATION:

NENE 27 160S 080E
 SURFACE: 0704 FNL 0975 FEL
 BOTTOM: 0704 FNL 0975 FEL
 EMERY
 WILDCAT Undesignated (002)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	DKO	2/19/02
Geology		
Surface		

LEASE TYPE: 3 - State
 LEASE NUMBER: ML-48215^{fe}
 SURFACE OWNER: 3 - State

PROPOSED FORMATION: FRSD

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[] Ind[] Sta[3] Fee[]
(No. 5952189)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. PRWID)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)

LOCATION AND SITING:


- R649-2-3. Unit _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: 243-1 (1160')
Eff Date: 10-13-98
Siting: 160' fr. Dr. Unit Boundary & 1320' between wells.
- R649-3-11. Directional Drill

COMMENTS:


Need presite. (12-10-01)

STIPULATIONS:

1-Statement of basis.

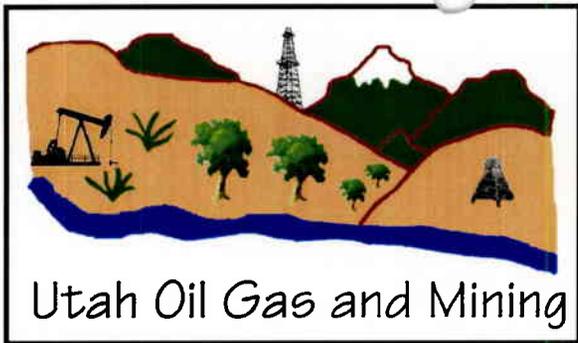

OPERATOR: PHILLIPS PETRO CO (N1475)
SEC. 27, T16S, R8E
FIELD: WILDCAT (001)
COUNTY: EMERY SPACING: 243-1 (160')

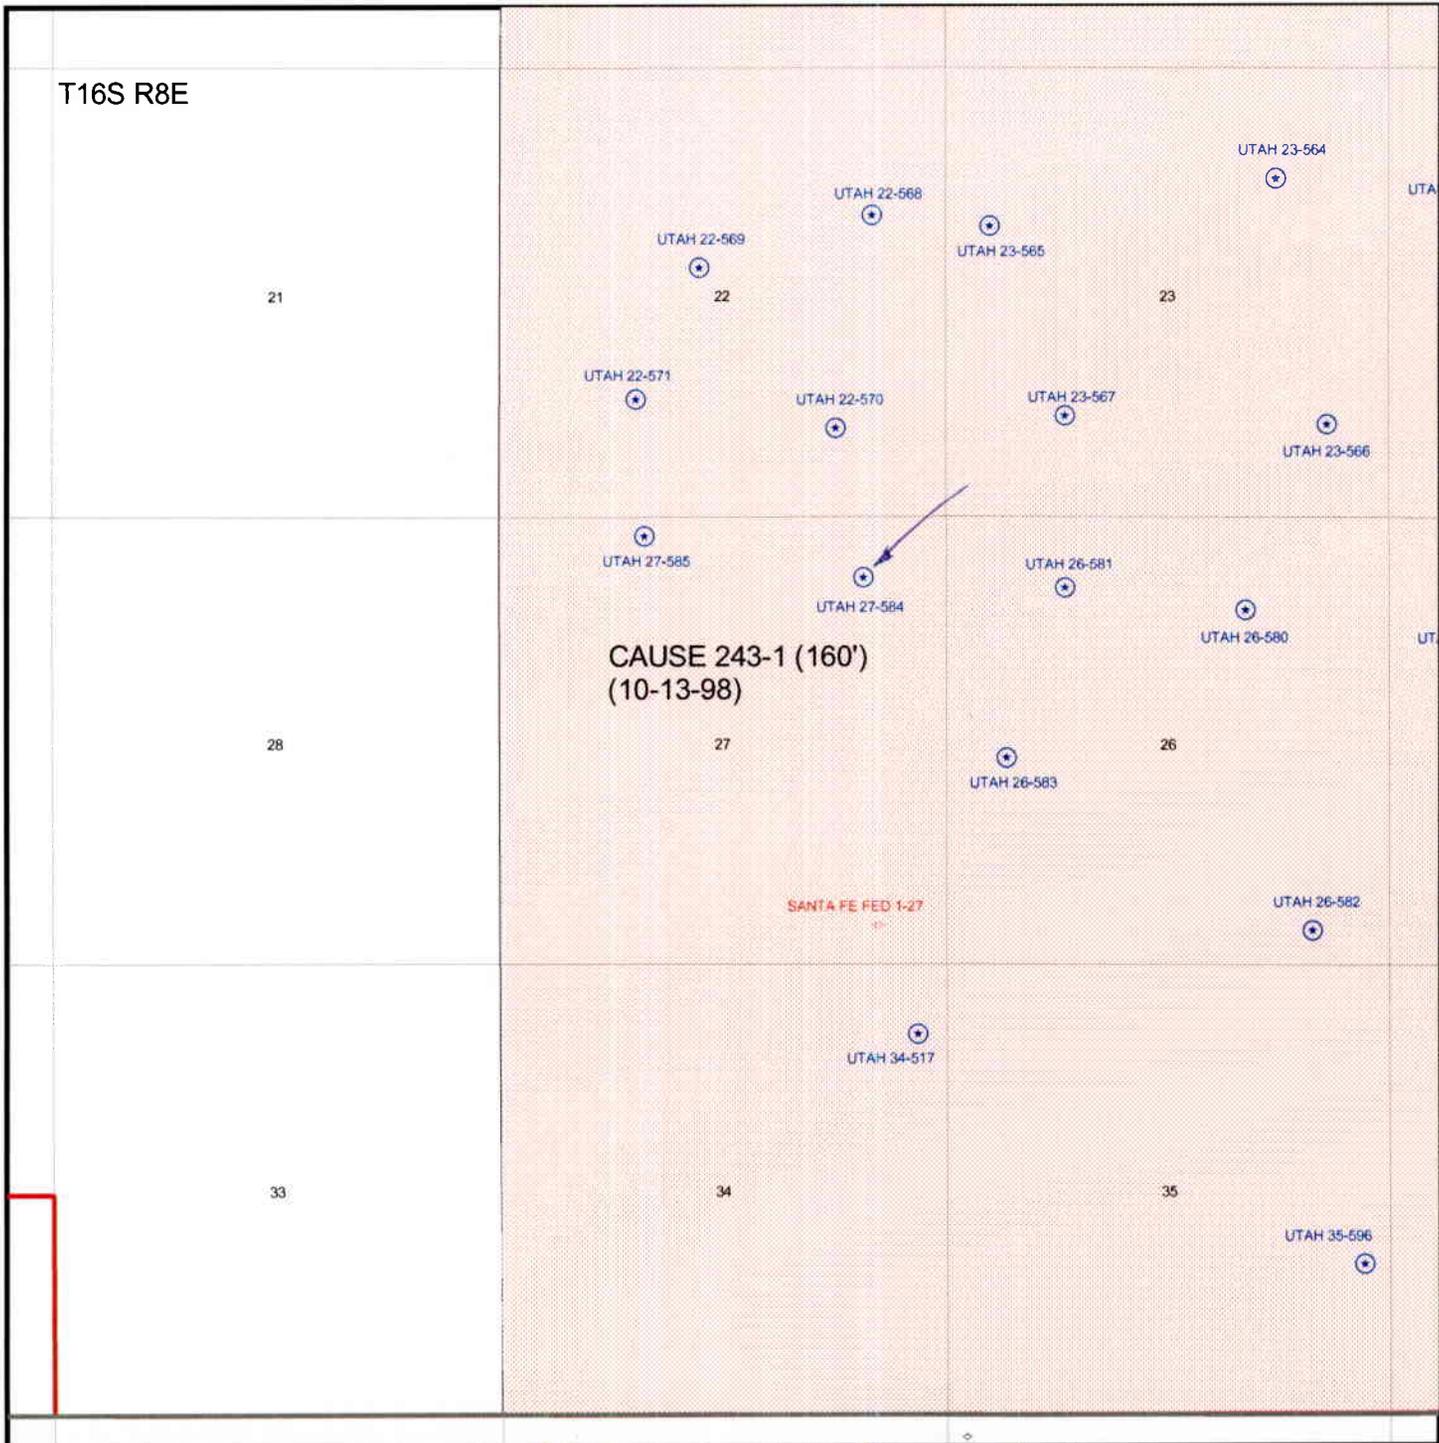

ON-SITE PREDRILL EVALUATION
Division of Oil, Gas and Mining

OPERATOR: Phillips
WELL NAME & NUMBER: Utah 27-584
API NUMBER: 43-015-30545
LEASE: State FIELD/UNIT: _____
LOCATION: 1/4,1/4 NENE Sec: 27 TWP: 16S RNG: 8E 704 FNL 975 FEL
LEGAL WELL SITING: 660 F Unit Boundary; 1320 F ANOTHER WELL.
GPS COORD (UTM): X = 499559 E; Y = 4361862 N SURFACE OWNER: SITLA

PARTICIPANTS

M. Jones (DOGM), J. Semborski (Phillips), L. Jensen (NELCO), C. Colt (DWR), SITLA and Emery Co. were invited but chose not to attend the onsite.

REGIONAL/LOCAL SETTING & TOPOGRAPHY

Proposed location is ~16 miles SW of Price, Utah and ~7 miles NW of Huntington, Utah. The direct area drains to the Southeast into Cedar Creek, a year-round live water source. Dry washes run throughout the area. The soil easily erodes when disturbed. Topography and terrain of the immediate and surrounding area slopes steeply to the SE and is very rocky.

SURFACE USE PLAN

CURRENT SURFACE USE: Wildlife habitat and grazing.
PROPOSED SURFACE DISTURBANCE: 235' x 175' and a 50' x 50' x 10' pit.
LOCATION OF EXISTING WELLS WITHIN A 1 MILE RADIUS: 13 proposed wells within a 1 mile radius of the above proposed well.
LOCATION OF PRODUCTION FACILITIES AND PIPELINES: Along roadside.
SOURCE OF CONSTRUCTION MATERIAL: Obtained locally and transported in.
ANCILLARY FACILITIES: None anticipated.

WASTE MANAGEMENT PLAN:

Portable chemical toilets which will be emptied into the municipal waste treatment system; garbage cans on location will be emptied into centralized dumpsters which will be emptied into an approved landfill. Crude oil production is unlikely. Drilling fluid, completion / frac fluid and cuttings will be buried in the pit after evaporation and slashing the pit liner. Produced water will be gathered to the evaporation pit and eventually injected into the Navajo Sandstone via a salt water disposal well. Used oil from drilling operations and support is hauled to a used oil recycler and reused.

ENVIRONMENTAL PARAMETERS

AFFECTED FLOODPLAINS AND/OR WETLANDS: None.

FLORA/FAUNA: Pinion Juniper, Sagebrush, grasses, Elk, deer, small game, rodents.

SOIL TYPE AND CHARACTERISTICS: Gravelly / rocky.

SURFACE FORMATION & CHARACTERISTICS: _____

EROSION/SEDIMENTATION/STABILITY: Easily erosive.

PALEONTOLOGICAL POTENTIAL: None observed.

RESERVE PIT

CHARACTERISTICS: Dugout earthen pit.

LINER REQUIREMENTS (Site Ranking Form attached): Liner required.

SURFACE RESTORATION/RECLAMATION PLAN

As per surface use agreement.

SURFACE AGREEMENT: Yes.

CULTURAL RESOURCES/ARCHAEOLOGY: Arch study on file with state.

OTHER OBSERVATIONS/COMMENTS

ATTACHMENTS

Photos of this location were taken and placed on file.

Mark L. Jones
DOGM REPRESENTATIVE

December 10, 2001 / 12:30 pm
DATE/TIME

**Evaluation Ranking Criteria and Ranking Score
For Reserve and Onsite Pit Liner Requirements**

<u>Site-Specific Factors</u>	<u>Ranking</u>	<u>Site Ranking</u>
Distance to Groundwater (feet)		
>200	0	
100 to 200	5	
75 to 100	10	
25 to 75	15	
<25 or recharge area	20	<u>0</u>
Distance to Surf. Water (feet)		
>1000	0	
300 to 1000	2	
200 to 300	10	
100 to 200	15	
< 100	20	<u>0</u>
Distance to Nearest Municipal Well (feet)		
>5280	0	
1320 to 5280	5	
500 to 1320	10	
<500	20	<u>0</u>
Distance to Other Wells (feet)		
>1320	0	
300 to 1320	10	
<300	20	<u>0</u>
Native Soil Type		
Low permeability	0	
Mod. permeability	10	
High permeability	20	<u>20</u>
Fluid Type		
Air/mist	0	
Fresh Water	5	
TDS >5000 and <10000	10	
TDS >10000 or Oil Base Mud Fluid	15	
containing significant levels of hazardous constituents	20	<u>0</u>
Drill Cuttings		
Normal Rock	0	
Salt or detrimental	10	<u>0</u>
Annual Precipitation (inches)		
<10	0	
10 to 20	5	
>20	10	<u>0</u>
Affected Populations		
<10	0	
10 to 30	6	
30 to 50	8	
>50	10	<u>0</u>
Presence of Nearby Utility Conduits		
Not Present	0	
Unknown	10	
Present	15	<u>0</u>

Final Score 20 (Level I Sensitivity)

Sensitivity Level I = 20 or more; total containment is required.
Sensitivity Level II = 15-19; lining is discretionary.
Sensitivity Level III = below 15; no specific lining is required.





**DIVISION OF OIL, GAS AND MINING
APPLICATION FOR PERMIT TO DRILL
STATEMENT OF BASIS**

OPERATOR: Phillips
WELL NAME & NUMBER: Utah 27-584
API NUMBER: 43-015-30545
LOCATION: 1/4,1/4 NENE Sec: 27 TWP: 16S RNG: 8E 704 F8L 975 FEL
N

Geology/Ground Water:

This location is situated on the northeast slope of a spur in the upper units of the Emery Sandstone Member of the Mancos Shale, on the Middle shale unit of the Emery Sandstone Member of the Mancos Shale. It is on the northwest flank of the Huntington Anticline. Local outcrops dip under the Wasatch Plateau at about 6° to the northwest. It is unlikely that there is any significant high quality ground water resource to be found in the strata below the location. The Lower sandstone unit is present and may provide aquifer grade strata, although it is rather isolated from a reliable recharge source. The nearest surface waters are in Cedar Creek, which is ~2 miles to the northeast, and a spring at the head of Chris Otteson Hollow that is about ~1½ miles west. The proposed cementing and casing program should be adequate to protect any potential groundwater resource. In any case, the operator should extend the surface casing as needed to protect any interval of strata in the Emery Sandstone Member of the Mancos Shale that is a possible aquifer. No rights have been filed within a mile of the location.

Reviewer: Christopher J, Kierst **Date:** 2/13/02

Surface:

Proposed location is ~16 miles SW of Price, Utah and ~7 miles NW of Huntington, Utah. The direct area drains to the Southeast into Cedar Creek, a year-round live water source. Dry washes run throughout the area. The soil easily erodes when disturbed. Topography and terrain of the immediate and surrounding area slopes steeply to the SE and is very rocky. DWR was present during the on-site however SITLA and Emery County were invited but chose not to attend.

Reviewer: Mark L. Jones **Date:** January 16, 2002

Conditions of Approval/Application for Permit to Drill:

1. A synthetic liner with a minimum thickness of 12 mils shall be properly installed and maintained in the reserve pit.

UTAH DIVISION OF WATER RIGHTS
WATER RIGHT POINT OF DIVERSION PLOT CREATED WED, FEB 13, 2002, 10:16 AM
PLOT SHOWS LOCATION OF 0 POINTS OF DIVERSION

PLOT OF AN AREA WITH A RADIUS OF 5280 FEET FROM A POINT
S 704 FEET, W 975 FEET OF THE NE CORNER,
SECTION 27 TOWNSHIP 16S RANGE 8E SL BASE AND MERIDIAN

PLOT SCALE IS APPROXIMATELY 1 INCH = 2000 FEET

N O R T H

** *

**

**

* *

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*


*

*

*

*

*

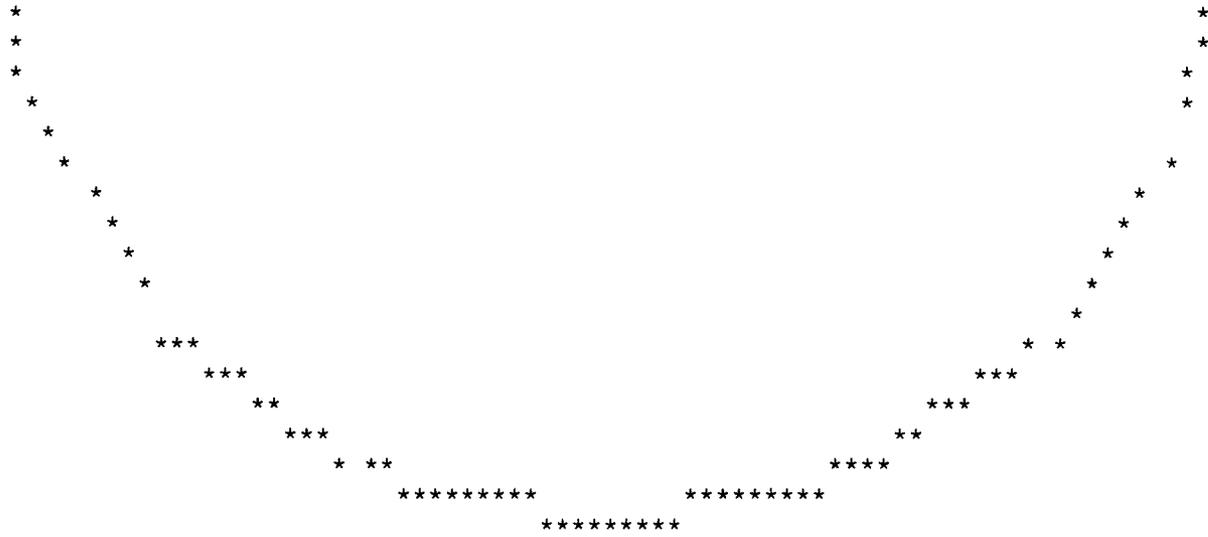

Well name:	02-02 Phillips Utah 27-584	
Operator:	Phillips Petroleum Company	Project ID:
String type:	Surface	43-015-30545
Location:	Emery County	

Design parameters:

Collapse

Mud weight: 8.400 ppg
 Design is based on evacuated pipe.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No
 Surface temperature: 65 °F
 Bottom hole temperature: 70 °F
 Temperature gradient: 1.40 °F/100ft
 Minimum section length: 3 ft

Cement top:

Surface

Burst

Max anticipated surface pressure: 0 psi
 Internal gradient: 0.436 psi/ft
 Calculated BHP 157 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
 8 Round LTC: 1.80 (J)
 Buttress: 1.60 (J)
 Premium: 1.50 (J)
 Body yield: 1.50 (B)

Tension is based on air weight.
 Neutral point: 315 ft

Non-directional string.

Re subsequent strings:

Next setting depth: 3,598 ft
 Next mud weight: 8.400 ppg
 Next setting BHP: 1,570 psi
 Fracture mud wt: 19,000 ppg
 Fracture depth: 360 ft
 Injection pressure 355 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost ()
1	360	8.625	24.00	J-55	ST&C	360	360	7.972	2359
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	157	1370	<u>8.72</u>	157	2950	<u>18.78</u>	9	244	<u>28.24 J</u>

Prepared by: Dustin Doucet
 Utah Dept. of Natural Resources

Phone: 801-538-5281
 FAX: 801-359-3940

Date: February 19, 2002
 Salt Lake City, Utah

ENGINEERING STIPULATIONS: NONE

Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.
 Collapse is based on a vertical depth of 360 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes.
 Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	02-02 Phillips Utah 27-584	
Operator:	Phillips Petroleum Company	Project ID:
String type:	Production	43-015-30545
Location:	Emery County	

Design parameters:

Collapse
 Mud weight: 8.400 ppg
 Design is based on evacuated pipe.

Burst
 Max anticipated surface pressure: 0 psi
 Internal gradient: 0.436 psi/ft
 Calculated BHP: 1,570 psi

No backup mud specified.

Minimum design factors:

Collapse:
 Design factor: 1.125

Burst:
 Design factor: 1.00

Tension:
 8 Round STC: 1.80 (J)
 8 Round LTC: 1.80 (J)
 Buttress: 1.60 (J)
 Premium: 1.50 (J)
 Body yield: 1.50 (B)

Tension is based on air weight.
 Neutral point: 3,140 ft

Environment:

H2S considered? No
 Surface temperature: 65 °F
 Bottom hole temperature: 115 °F
 Temperature gradient: 1.40 °F/100ft
 Minimum section length: 250 ft

Cement top: 895 ft w/15% wo
 Take surface w/0% wo

Non-directional string.

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost ()
1	3598	5.5	17.00	N-80	LT&C	3598	3598	4.767	25810

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	1570	6290	4.01	1570	7740	4.93	61	348	5.69 J

Prepared by: Dustin Doucet
 Utah Dept. of Natural Resources

Phone: 801-538-5281
 FAX: 801-359-3940

Date: February 19, 2002
 Salt Lake City, Utah

ENGINEERING STIPULATIONS: NONE
 Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.
 Collapse is based on a vertical depth of 3598 ft, a mud weight of 8.4 ppg The casing is considered to be evacuated for collapse purposes.
 Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

02-02 Phillips Utah 27-58

Casing Schematic

Surface

Mancos SW

8-5/8"
MW 8.4
Frac 19.

TOC @
0.

Surface
360. MD

w/13% washout

TOC @
895.

TOC @ Surface w/15% washout

BOP

$$\frac{BHP}{(0.052)(8.4)(3598)} = 1572 \text{ psi}$$

Anticipated = 1558 psi

$$\frac{G_{95}}{(0.12)(3598)} = 432 \text{ psi}$$

MASP = 1140 psi

3M BOPE proposed

Adequate DRD
2/19/02

3138' Bluegate/Ferron

3163'

coals & ss's

3298'

5-1/2"
MW 8.4

Production
3598. MD

w/15% washout



PHILLIPS PETROLEUM COMPANY

6825 South 5300 West
P.O. Box 851
Price, UT 84501
TEL: (435) 613-9777 FAX: (435) 613-9782

RECEIVED

FEB 27 2002

**DIVISION OF
OIL, GAS AND MINING**

February 21, 2002

Ms. Lisha Cordova
State of Utah
Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
SLC, Utah 84114-5801

RE: New APD pages for Utah 26-583 and Utah 27-584

Dear Lisha:

Enclosed is a signed copy of the text portion for the Utah 27-584 APD. I have flagged the signed pages so you can pull those out and attached them to the current APD on file.

Also, Dustin called me regarding the proposed depth for the 26-583 APD. I have included a revised APD cover page for this well showing a revised proposed depth of 3241'. I think Dustin may have wrote in the correct number on your file copy but this will give you a clean version if you prefer.

Thank you for your help.

Sincerely,

Jean Semborski
Permit Analyst

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING

001

5. Lease Designation and Serial Number:
ML-48215

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

6. If Indian, Allottee or Tribe Name:
N/A

1A. Type of Work: DRILL DEEPEN

7. Unit Agreement Name:
N/A

B. Type of Well: OIL GAS OTHER: SINGLE ZONE MULTIPLE ZONE

8. Farm or Lease Name:
Utah

2. Name of Operator:
Phillips Petroleum Company

9. Well Number:
27-584

3. Address and Telephone Number:
6825 S. 5300 W. P.O. Box 851 Price, Utah 84501 (435) 613-9777

10. Field or Pool, or Wildcat:
Wildcat Undesignated

4. Location of Well (Footages)
At Surface: 704' FNL, 975' FEL
At Proposed Producing Zone:
4361862 N
499555 E

11. Qtr/Qtr, Section, Township, Range, Meridian:
NE/4 NE/4 Section 27, T16S, R08E, SLB&M

14. Distance in miles and direction from nearest town or post office:
4.9 Miles northwest of Huntington, Utah

12. County: Emery 13. State: UTAH

15. Distance to nearest property or lease line (feet): 703'

16. Number of acres in lease: 1878.52

17. Number of acres assigned to this well: 160 acres

18. Distance to nearest well, drilling, completed, or applied for, on this lease (feet): 1600'

19. Proposed Depth: 3598'

20. Rotary or cable tools: Rotary

21. Elevations (show whether DF, RT, GR, etc.): 6718.3'

22. Approximate date work will start: May 2002

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
14"	12 3/4"	Conductor	40'	
11"	J-55 8 5/8"	24#/ft	360'	139 sks G+2%CaCl+1/4#/sk floccel
7 7/8"	N-80 5 1/2"	17#/ft	3588'	332 sks 50/50poz 8%gel+2%CaCl+10%extender
				78 sks "G" thixotropic

DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

RECEIVED

FEB 27 2002

DIVISION OF
OIL, GAS AND MINING

24. Name & Signature: Jean Semborski *Jean Semborski* Title: Permitting Analyst Date: 10/26/01

(This space for state use only)
API Number Assigned: 43-015-30545

Approval: **Approved by the Utah Division of Oil, Gas and Mining**
Date: 02-27-02
By: *[Signature]*

Range 8 East

(S89°51'W - 2574.00')

(N89°47'W - 2637.36')

(N89°45'20"W - 2635.69')

703.79' DRILL HOLE #27-584
ELEVATION 6718.3'

UTM
N - 4361864
E - 499555

975.11'

27

(S89°55'W - 2585.88')

(S89°54'W - 2635.38')

Township 16 South

(N00°05'E - 6249.84')

(N00°02'W - 6237.76')

(S00°00'13"E - 2617.92')

Location:

THE WELL LOCATION WAS DETERMINED USING A TRIMBLE 4700 GPS SURVEY GRADE UNIT.

Basis of Bearing:

THE BASIS OF BEARING IS GPS MEASURED.

GLO Bearing:

THE BEARINGS INDICATED ARE PER THE RECORDED PLAT OBTAINED FROM THE U.S. LAND OFFICE.

Basis of Elevation:


BASIS OF ELEVATION OF 6370.0' BEING AT THE SOUTHEAST SECTION CORNER OF SECTION 34, TOWNSHIP 16 SOUTH, RANGE 8 EAST, SALT LAKE BASE AND MERIDIAN, AS SHOWN ON THE HIAWATHA QUADRANGLE 7.5 MINUTE SERIES MAP.

Description of Location:

PROPOSED DRILL HOLE LOCATED IN THE NE1/4, NE1/4 OF SECTION 27, T16S, R8E, S.L.B.&M., BEING 703.79' SOUTH AND 975.11' WEST FROM THE NORTHEAST CORNER OF SECTION 27, T16S, R8E, SALT LAKE BASE & MERIDIAN.

Surveyor's Certificate:

I, Albert J. Spensko, a Registered Professional Land Surveyor, holding Certificate 146652 State of Utah, do hereby certify that the information on this drawing is a true and accurate survey based on data of record and was conducted under my personal direction and supervision as shown hereon.



Talon Resources, Inc.
375 South Carbon Avenue, Suite 101
Price, Utah 84501
Ph: 435-637-8781
Fax: 435-636-8803



**PHILLIPS PETROLEUM
WELL #27-584**

Section 27, T16S, R8E, S.L.B.&M.
Emery County, Utah

Drawn By:
J. STANSFIELD

Checked By:
L.W.J./A.J.S.

Drawing No.
A-1

Date:
10/11/01

Scale:
1" = 1000'

Sheet 1 of 1

Job No.
399

Legend

- Drill Hole Location
- ⊕ Brass Cap (Found)
- Brass Cap (Searched for, but not found)
- △ Rock Pile
- () GLO
- GPS Measured

NOTES:

1. UTM AND LATITUDE / LONGITUDE COORDINATES ARE DERIVED USING A GPS PATHFINDER AND ARE SHOWN IN NAD 27 DATUM.

LAT / LONG
39°24'29"N
111°00'19"W



GRAPHIC SCALE



(IN FEET)

1 inch = 1000 ft.

003



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt
Governor
Kathleen Clarke
Executive Director
Lowell P. Braxton
Division Director

1594 West North Temple, Suite 1210
PO Box 145801
Salt Lake City, Utah 84114-5801
801-538-5340
801-359-3940 (Fax)
801-538-7223 (TDD)

February 27, 2002

Phillips Petroleum Company
PO Box 851
Price UT 84501

Re: Utah 27-584 Well, 704' FNL, 975' FEL, NE NE, Sec. 27, T. 16 South, R. 8 East,
Emery County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-015-30545.

Sincerely,

A handwritten signature in black ink, appearing to read 'John R. Baza'.

John R. Baza
Associate Director

er

Enclosures

cc: Emery County Assessor
SITLA

Operator: Phillips Petroleum Company
Well Name & Number Utah 27-584
API Number: 43-015-30545
Lease: ML 48215

Location: NE NE **Sec.** 27 **T.** 16 South **R.** 8 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- 24 hours prior to cementing or testing casing
- 24 hours prior to testing blowout prevention equipment
- 24 hours prior to spudding the well
- within 24 hours of any emergency changes made to the approved drilling program
- prior to commencing operations to plug and abandon the well

The following are Division of Oil, Gas and Mining contacts and their work telephone numbers (please leave a voice mail message if the person is not available to take the call):

- Dan Jarvis at (801) 538-5338
- Carol Daniels at (801) 538-5284 (spud)

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.

5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)

Earlene Russell - Cedar Creek Wells

From: "John Senulis" <senjohn@usa.net>
To: "John Baza" <nrogm.jbaza@state.ut.us>
Date: 02/20/2002 11:25 AM
Subject: Cedar Creek Wells
CC: "Jean Semborski" <jeansemborski@yahoo.com>

Mr. Baza:

Attached you will find a chart that lists the wells and access corridors for the Cedar Creek area to be drilled by Phillips Petroleum Company. The chart was part of the report submitted to Jim Dykman (SHPO reference report U01SC0497) and Ken Wintch (SITLA) on February 15, 2002. The report concluded that no archeological sites will be impacted by the proposed projects. An archeological monitor stipulation was placed on construction of the access corridor between the Mohrland highway and the Utah 13-376 well location. Archeological clearance without stipulation was recommended for all of the other well and access locations including the Utah 23-566 and Utah 23-567.

If you need additional information please do not hesitate to contact us.

John Senulis
SENCO-PHENIX Archeological Consultants
435.613.9091

Project Location

The following chart shows the well location, access corridor, and associated cultural resources:

Well	Acres	Location	Access	Cultural Resources
Utah 17-367	0	NE ¼ of Section 17, T16S, R9E	2,600 ft.	None
Utah 17-368	0	NE ¼ of Section 17, T16S, R9E	2700 ft.	None
Utah 18-371	0	NE ¼ of Section 18, T16S, R9E	3,000 ft.	None
Utah 18-372	0	NW ¼ of Section 18, T16S, R9E	1,500 ft.	None
Utah 18-373	0	SW ¼ of Section 18, T16S, R9E	3,700 ft.	42EM2769
Utah 18-374	0	SE ¼ Section 18, T16S, R9E	3,100 ft.	None
Utah 19-377	10	NE ¼ of Section 19, T16S, R9E	6,900 ft.	None
Utah 19-378*	20	NW ¼ of Section 19, T16S, R9E	3,100 ft.	42EM2771, IF 9
PPCO 19-379	10	SW ¼ of Section 19, T16S, R9E	1,700 ft.	None
Utah 20-382	10	NW ¼ of Section 20, T16S, R9E	3,200 ft.	None
Utah 30-431	10	NE ¼ of Section 30, T16S, R9E	1,800 ft.	None
PPCO 30-605	10	NW ¼ of Section 30, T16S, R9E	500 ft.	None
Utah 13-376	20	SE ¼ of Section 13, T16S, R8E	3,000 ft.	42EM2735, 2736, 2737, 2738, 2739, 2740, 2743, 2744, 2745, 2748, 2770 IF 1, 2, 3, 4, 5, 6, 10, 11, 15
Utah 13-550	20	SW ¼ of Section 13, T16S, R8E	2,200 ft.	42EM2741, 2747 IF 7
Utah 13-550 Pipelines	0	Sections 13, 14, 15, T16S, R8E	10,800 ft.	42EM2772
Utah 14-551	10	SE ¼ of Section 14, T16S, R8E	500 ft.	None
Utah 14-552	4**	SW ¼ of Section 14, T16S, R8E	0 ft.	None
Utah 22-568	4**	NE ¼ of Section 22, T16S, R8E	0 ft.	None
Utah 22-569	4**	NW ¼ of Section 22, T16S, R8E	1,500 ft.	None
Utah 22-570	10	SE ¼ of Section 22, T16S, R8E	0 ft.	None
Utah 22-571	4**	SW ¼ of Section 22, T16S, R8E	0 ft.	None
Utah 23-564	5**	NE ¼ of Section 23, T16S, R8E	700 ft.	None
Utah 23-565	5**	NW ¼ of Section 23, T16S, R8E	2,200 ft.	None
Utah 23-566*	20	SE ¼ of Section 23, T16S, R8E	2,700 ft.	42EM2585**
Utah 23-567	4**	SW ¼ of Section 23, T16S, R8E	0 ft.	42EM2589**
Utah 24-560	10	NE ¼ of Section 24, T16S, R8E	100 ft.	None
Utah 24-561	10	NE ¼ of Section 24, T16S, R8E	2,000 ft.	IF 13, 14
Utah 24-562	10	SE ¼ of Section 24, T16S, R8E	3,300 ft.	42EM2581** 42EM2749, 2750
Utah 24-563	2**	SW ¼ of Section 24, T16S, R8E	1,600 ft.	None
Utah 25-576	5**	NE ¼ of Section 25, T16S, R8E	2,500 ft.	None
Utah 25-577	10	NW ¼ of Section 25, T16S, R8E	2,600 ft.	42EM2742, IF 8
Utah 26-580	10	NE ¼ of Section 26, T16S, R8E	2,800 ft.	42EM2588**
Utah 26-581	10	NW ¼ of Section 26, T16S, R8E	3,000 ft.	IF 12
Utah 26-583	10	SW ¼ of Section 26, T16S, R8E	3,600 ft.	42EM2746, IF 16, 17, 18
Utah 27-584	10	NE ¼ of Section 27, T16S, R8E	1,700 ft.	None
Utah 27-585	10	NW ¼ of Section 27, T16S, R8E	1,600 ft.	None
Roadside Pipeline	0	Section 24, T16S, R8E Sections 19, 30, T16S, R9E	6,700	42EM2583, 2584**

RECEIVED
FEB 20 2002
DIV OF OIL, GAS & MINING

CONFIDENTIAL

43-015.30545

*= Relocated Well; ** = Previous Montgomery Survey; Eligible Sites in Red

004

CONFIDENTIAL

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Company: PHILLIPS PETROLEUM COMPANY

Well Name: UTAH 27-584

Api No. 43-015-30545 LEASE TYPE: STATE

Section 27 Township 16S Range 08E County EMERY

Drilling Contractor PENSE BROTHERS DRILLING RIG # 9

SPUDDED:

Date 05/29/02

Time 12:00 NOON

How DRY

Drilling will commence _____

Reported by FRANKIE HATHAWAY

Telephone # 1-435-613-9777

Date 05/30/2002 Signed: CHD

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING

CONFIDENTIAL

005

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells.
Use APPLICATION FOR PERMIT TO DRILL OR DEEPEN form for such proposals.

5. Lease Designation and Serial Number: ML-48215
6. If Indian, Allottee or Tribe Name: N/A
7. Unit Agreement Name: N/A
8. Well Name and Number: Utah 27-584
9. API Well Number: 43-015-30545
10. Field or Pool, or Wildcat: Undesignated

1. Type of Well: OIL GAS OTHER: _____

2. Name of Operator:
Phillips Petroleum Company

3. Address and Telephone Number:
6825 S. 5300 W. P.O. Box 851 Price, Utah 84501 (435) 613-9777

4. Location of Well
Footages: 704' FNL, 975' FEL
QQ, Sec., T., R., M.: NE/4, NE/4, Section 27, T16S, R08E, SLB&M

County: Emery County
State: Utah

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

NOTICE OF INTENT (Submit in Duplicate)	SUBSEQUENT REPORT (Submit Original Form Only)
<input type="checkbox"/> Abandon <input type="checkbox"/> Repair Casing <input type="checkbox"/> Change of Plans <input type="checkbox"/> Convert to Injection <input type="checkbox"/> Fracture Treat or Acidize <input type="checkbox"/> Multiple Completion <input type="checkbox"/> Other _____ Approximate date work will start _____	<input type="checkbox"/> Abandon * <input type="checkbox"/> Repair Casing <input type="checkbox"/> Change of Plans <input type="checkbox"/> Convert to Injection <input type="checkbox"/> Fracture Treat or Acidize <input checked="" type="checkbox"/> Other _____ Spud Notice Date of work completion _____
<input type="checkbox"/> New Construction <input type="checkbox"/> Pull or Alter Casing <input type="checkbox"/> Recomplete <input type="checkbox"/> Reperforate <input type="checkbox"/> Vent or Flare <input type="checkbox"/> Water Shut-Off	<input type="checkbox"/> New Construction <input type="checkbox"/> Pull or Alter Casing <input type="checkbox"/> Reperforate <input type="checkbox"/> Vent or Flare <input type="checkbox"/> Water Shut-Off

Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION REPORT AND LOG form.
* Must be accompanied by a cement verification report.

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Please be advised that the Utah 27-584 well was spud on 5/29/02 at 9:40 am
Pense bros. Rig #9
Dry drill

ORIGINAL

CONFIDENTIAL

13.
Name & Signature: Frankie Hathaway *Frankie Hathaway* Title: Administrative Assistant Date: 6/11/02

(This space for state use only)

RECEIVED

JUN 13 2002

DIVISION OF
OIL, GAS AND MINING

ENTITY ACTION FORM - FORM 6

006

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
B	99999	11256	43-007-30429	Utah 34-210	SWSW	27	14S	09E	Carbon	6/5/02	6-13-02
WELL 1 COMMENTS: New single well, spud inside PA and inside of Unit boundary											
A	99999	13510	43-007-30767	Utah 34-512	NWSW	34	13S	09E	Carbon	6/6/02	6-13-02
WELL 2 COMMENTS: New single well, spud outside the PA but inside of Unit boundary											
A	99999	13511	43-007-30820	Utah 34-513	NESE	34	13S	09E	Carbon	6/9/02	6-13-02
WELL 3 COMMENTS: New single well, spud outside the PA but inside of Unit boundary											
A	99999	13512	43-015-30334	Utah 15-553	NESE	15	16S	08E	Emery	5/31/02	6-13-02
WELL 4 COMMENTS: New single well, spud outside the PA but inside of Unit boundary											
A	99999	13513	43-015-30545	Utah 27-584	NENE	27	16S	08E	Emery	5/29/02	6-13-02
WELL 5 COMMENTS: New single well, spud outside the PA but inside of Unit boundary											

ORIGINAL

RECEIVED

JUN 13 2002 CONFIDENTIAL

DIVISION OF OIL, GAS AND MINING

ACTION CODES (See Instructions on back of form)

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected

Frankie Hathaway *Frankie Hathaway*
Signature

Administrative Assistant 6/11/02
Title Date

Phone No. (435)613-9777

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING

CONFIDENTIAL

007

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells.
Use APPLICATION FOR PERMIT TO DRILL OR DEEPEN form for such proposals.

5. Lease Designation and Serial Number: ML-48215
6. If Indian, Allottee or Tribe Name: N/A
7. Unit Agreement Name: N/A
8. Well Name and Number: Utah 27-584
9. API Well Number: 43-015-30545
10. Field or Pool, or Wildcat: Drunkards Wash

1. Type of Well: OIL GAS OTHER: _____

2. Name of Operator:
Phillips Petroleum Company

3. Address and Telephone Number:
6825 S. 5300 W. P.O. Box 851 Price, Utah 84501 (435) 613-9777

4. Location of Well
Footages: 704' FNL, 975' FEL
QQ, Sec., T., R., M.: NE/4 NE/4 Section 27, T16S, R08E, SLB&M

County: Emery County
State: Utah

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

NOTICE OF INTENT (Submit in Duplicate)	SUBSEQUENT REPORT (Submit Original Form Only)
<input type="checkbox"/> Abandon <input type="checkbox"/> Repair Casing <input type="checkbox"/> Change of Plans <input type="checkbox"/> Convert to Injection <input type="checkbox"/> Fracture Treat or Acidize <input type="checkbox"/> Multiple Completion <input type="checkbox"/> Other _____ Approximate date work will start _____	<input type="checkbox"/> New Construction <input type="checkbox"/> Pull or Alter Casing <input type="checkbox"/> Recomplete <input type="checkbox"/> Reperforate <input type="checkbox"/> Vent or Flare <input type="checkbox"/> Water Shut-Off <input checked="" type="checkbox"/> Other _____ Well Report Date of work completion _____ <small>Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION REPORT AND LOG form. * Must be accompanied by a cement verification report.</small>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

See Attached:

CONFIDENTIAL

RECEIVED

JUN 13 2002

DIVISION OF
OIL, GAS AND MINING

ORIGINAL

13.
Name & Signature: Frankie Hathaway *Frankie Hathaway* Title: Administrative Assistant Date: 6/11/02

(This space for state use only)

DRUNKARDS WASH PROJECT DAILY WELL REPORT

CONFIDENTIAL

UTAH

27-584

API NO: 43-015-30545

704' FNL, 975' FEL

NENE SEC: 27 TWN 16S RNG: 08E

SPUD TIME/DATE: 5/29/2002 9:40:00 AM

COUNTY: Emery

TD TIME/DATE: 5/31/2002 9:35:00 AM

ELEVATION: 6718

TD DEPTH: 3600

DRILLING CONTRACTOR: Pense Brothers Rig #9

ON-LINE TIME/DATE:

Bit Information

Type	Size	In	Out	Hours	Rotating Hours
Air Hammer	15 in	0.00	14.00	1	0.5
Air Hammer	11 in	14.00	400.00	2	1.5
Air Hammer	7 7/8	400.00	2810.00	17.5	14
Tri-cone	7 7/8in	2810.00	3600.00	17.5	9

Conductor Casing

Bore Hole Size: 15 in Conductor From: 0.00 To: 14.00

Casing Description: 12 3/4in PE Number of Joints: 1 Set @: 14.00

Cement: Amount:

Cement Report:

Surface Casing

Bore Hole Size: 11 in Surface Casing From: 14.00 To: 400.00

Casing Description: 8 5/8 in 24#/ft J-55 Number of Joints: 13 Set @: 388.00

Cement: G + 2%S-1 + 1/4#/sk D-29 Amount: 175.00

Cement Report: r/iup cementers, safety meeting, test lines, pump 30bbls ahead, mix & pump cement, displace w/ 22bbls of 2% kcl, close valve @ 5pm 5/29/02, 15 bbls good cement to surface,

Production Casing

Bore Hole Size: 7 7/8 in Prod.Casing From: 400.00 To: 3600.00

Casing Description: 5 1/2 in 17#/ft N-80 Number of Joints: Length:

Lead Cement 50/50 POZ, 8%D20, 10%D44, 2%S001, 1/4#/sk Amount: 150.00

Tail Cement: 10-1 RFC Amount: 90.00

Cement Report: r/up cementers, safety meeting, test lines, pump 100 bbls of 2% kcl ahead, mix & pump cement, s/down, drop plug, clean lines, displace w/ 83 bbls of 2% kcl, plug down @ 1:15pm 6/01/02, no returns, did see lift pressure,

Float Equipment: 5 1/2in float shoe Centralizers ran on: 2,5,9,13,& 21

RECEIVED

JUN 13 2002

DIVISION OF
OIL, GAS AND MINING

Drilling Data

DAY 1 5/30/2002

CURRENT DEPTH 1100 CURRENT OPERATIONS: drilling @ 1100ft

ROTATING HRS: 6.00

7am-9am move on location,
9am-9:40am r/up & service equipment,
9:40am-11am spud @ 9:40am 5/29/02, drill & set 14ft of conductor,
11am-12pm n/up to drill 11in hole,
12pm-1:20pm drill 400ft of 11in hole,
1:20pm-2pm clean hole, & pooh,
2pm-2:45pm rih w/ 8 5/8in guide shoe + 13 jts of 8 5/8in csg, land @ 387.2ft,
2:45pm-4pm wait on cementers(on longstring job),
4pm-5pm r/up cementers, cement surface pipe, close valve @ 5pm 5/29/02, 15 bbls cement to surface,
5pm-5:30pm r/down cementers,
5:30pm-10pm woc,
10pm-1am break loose, n/up bope & manifold,
1am-2am n/up to drill 7 7/8in hole,
2am-3am rih, drill out cement,
3am-7am drill 7 7/8in hole to 1100ft,

Estimated Daily Cost: [REDACTED]

DAY 2 5/31/2002

CURRENT DEPTH 3390 CURRENT OPERATIONS: drilling @ 3390ft,

ROTATING HRS: 16.5

7am-11am drill 1100-1730ft, 11am-3pm drill 1730-2420ft, 3pm-5pm drill 2420-2810ft, 5pm-5:40pm clean hole,
5:40pm-8:30pm pooh, 8:30pm-9pm change bits, 9pm-12am rih w/ tricone, 12am-12:30am condition hole,
12:30am-4am drill 2810-3180ft, 4am-7am drill 3180-3390ft,

Estimated Daily Cost: [REDACTED]

DAY 3 6/1/2002

CURRENT DEPTH 3600 CURRENT OPERATIONS: r/up to run csg,

ROTATING HRS: 2.50

7am-9:35am drill 3390-3600ft, td @ 9:35am 5/31/02,
9:35am-10:30am clean hole,
10:30am-2:30pm pooh pump 100 bbls of 2% kcl @ 2000ft & 500 ft,
2:30pm-6pm r/up loggers, log well, r/down loggers, release rig @ 6pm 5/31/02,
6pm-8pm r/down & move off location,
8pm-7am no activity,

Estimated Daily Cost: [REDACTED]

DAY 4 6/2/2002

CURRENT DEPTH 3587 CURRENT OPERATIONS: making scraper run,

ROTATING HRS: 0.00

7am-8:30am r/up workover,
8:30am-9:45am set racks, unload csg & tally,
9:45am- 12:15pm rih w/ 5 1/2in float shoe + 83 jts of 5 1/2in csg, land @ 3586.99ft,
12:15pm-1:15pm r/up cementers, cement long string, plug down @ 1:15pm 6/01/02, no returns, did see lift
pressure,
1:15pm-2pm r/down cementers, sdfn

Estimated Daily Cost: [REDACTED]

DAY 5 6/3/2002

CURRENT DEPTH 3585 CURRENT OPERATIONS: no activity,

ROTATING HRS: 0.00

7am-2pm n/down bope, n/up well head & test, rih w/ 4 3/4in nom csg scraper + 117 jts of 2 7/8in tbq, tag @
3585ft, pooh laying tbq down, r/down & move off location,

Estimated Daily Cost: [REDACTED]

RECEIVED

JUN 13 2002

DIVISION OF
OIL, GAS AND MINING

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING

008

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells.
Use APPLICATION FOR PERMIT TO DRILL OR DEEPEN form for such proposals.

5. Lease Designation and Serial Number:
ML-48215

6. If Indian, Allottee or Tribe Name:
N/A

7. Unit Agreement Name:
N/A

8. Well Name and Number:
Utah 24-584

9. API Well Number:
43-015-30545

10. Field or Pool, or Wildcat:
Drunkards Wash

1. Type of Well: OIL GAS OTHER:

2. Name of Operator:
Phillips Petroleum Company

3. Address and Telephone Number:
6825 S. 5300 W. P.O. Box 851 Price, Utah 84501 (435) 613-9777

4. Location of Well
Footages: 704' FNL, 975' FEL
QQ, Sec., T., R., M.: NE/4 NE/4 SEC.27, T16S, R08E, SLB & M

County: Emery County
State: Utah

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

NOTICE OF INTENT
(Submit in Duplicate)

- Abandon
- Repair Casing
- Change of Plans
- Convert to Injection
- Fracture Treat or Acidize
- Multiple Completion
- Other _____
- Approximate date work will start _____
- New Construction
- Pull or Alter Casing
- Recomplete
- Reperforate
- Vent or Flare
- Water Shut-Off

SUBSEQUENT REPORT
(Submit Original Form Only)

- Abandon *
- Repair Casing
- Change of Plans
- Convert to Injection
- Fracture Treat or Acidize
- Other 1st Production Notification
- Date of work completion _____
- New Construction
- Pull or Alter Casing
- Reperforate
- Vent or Flare
- Water Shut-Off

Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION REPORT AND LOG form.
* Must be accompanied by a cement verification report.

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Please be advised that the Utah 24-584 showed first production on: 7/2/02
Gas production: 45 mcf
Water production: 91 bbl

RECEIVED
JUL 17 2002
DIVISION OF
OIL, GAS AND MINING
CONFIDENTIAL

13.

Name & Signature: Frankie Hathaway *Frankie Hathaway* Title: Operations Clerk Date: 7/12/02

(This space for state use only)

COPY

CONFIDENTIAL

FORM 8

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING

009

5. LEASE DESIGNATION AND SERIAL NO.
ML-48215

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
N/A

7. UNIT AGREEMENT NAME
N/A

8. FARM OR LEASE NAME
Utah

9. WELL NO.
27-584

10. FIELD AND POOL, OR WILDCAT
Undesignated

11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA
NE/NE, Sec. 27, T16S, R08E, SLB&M

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. TYPE OF WELL: OIL WELL GAS WELL DRY Other _____

b. TYPE OF COMPLETION: NEW WELL WORK OVER DEEP-EN PLUG BACK DIFF. RESVR. Other _____

2. NAME OF OPERATOR
Phillips Petroleum Company


3. ADDRESS OF OPERATOR
6825 S. 5300 W. P.O. Box 851 Price, Utah 84501 (435) 613-97

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)

At surface 704' FNL, 975' FEL

At top prod. interval reported below

At total depth



14. API NO. 43-015-30545 DATE ISSUED 2/27/02

12. COUNTY Emery 13. STATE Utah

15. DATE SPUNDED 5/29/02 16. DATE T.D. REACHED 5/31/02 17. DATE COMPL. (Ready to plug & abandon) 7/2/02 18. ELEVATIONS (DF, REB, RT, GR, ETC.) 6718' 19. ELEV. CASINGHEAD N/A

20. TOTAL DEPTH, MD & TVD 3600' 21. PLUG BACK T.D., MD & TVD 3585' 22. IF MULTIPLE COMPL., HOW MANY N/A 23. INTERVALS DRILLED BY to TD 24. PRODUCING INTERVAL(S), OF THIS COMPLETION--TOP, BOTTOM, NAME (MD OR TVD) Ferron Coal - Top Coal 3187' & Bottom Coal 3291'

25. WAS DIRECTIONAL SURVEY MADE N/A

26. TYPE ELECTRIC AND OTHER LOGS RUN CBL/GA/CCL-6-25-02
Dual Induction, Laterolog, SFF, Caliper, Comp Density & Neutron-6-6-02

27. WAS WELL CORED DRILL STEM TEST YES NO

28. CASING RECORD (Report all strings set in well)

CASING SIZE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	CEMENT RECORD	AMOUNT PULLED
12 3/4"	Conductor	14'	15"	175 sks Class G, 2%, 4% Gell & 1/4#/sk Floccel	
8 5/8"	55 24#	388'	11"	150 sks 50/50 POZ, 8% D-20, 10% D-44, 2% S-1	
5 1/2"	N80 17#	3585'	7 7/8"	90 sks 10-1 RFC (Thixotropic)	

29. LINER RECORD 30. TUBING RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET
					2-7/8"	3377'	N/A

31. PERFORATION RECORD (Interval, size and number)
Ferron Coal
Upper: 3187'-3193', 3199'-3205', 3229'-3231' 4 1/2" x 8"
Lower: 3258'-3265', 3287'-3291' 4 1/2" x 8"

32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
Upper 3187'-3231'	8700#, 20/40; 73,300# 16/30; 37,791 gal fluid
Lower 3258'-3291'	6600#, 20/40; 61,700# 16/30; 32,687 gal fluid

33. DIVISION OF OIL, GAS AND MINING PRODUCTION

DATE FIRST PRODUCTION 7/2/02 PRODUCTION METHOD (Flowline, gas lift, pumping, etc. and type of pump) Pumping - 2 1/2" x 2" x 16' RWAC WELL STATUS (Producing or shut-in) Producing

DATE OF TEST	HOURS TESTED	CHOKE SIZE	PROD'N. FOR TEST PERIOD	OIL---BBL.	GAS---MCF.	WATER---BBL.	GAS-OIL RATIO
7/2/02	24hrs.	-----	→	N/A	45	91	
FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE	OIL---BBL.	GAS---MCF.	WATER---BBL.	OIL GRAVITI - API (CORR.)	
19	19	→	N/A	45	91	N/A	

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.) SOLD TEST WITNESSED BY Kevin Snow

35. LIST OF ATTACHMENTS

36 I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED Jean Semborski TITLE Permitting Analyst DATE 7/12/02

COPY

CONFIDENTIAL

WELL NUMBER: Utah 27-584

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof, cored intervals; and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries)		38. GEOLOGIC MARKERS				
FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	NAME	TOP MEAS. DEPTH	TRUE VERT. DEPTH
Ferron	3187'	3291'	Coals and Sandstones Coal Interval: 3187'-3291'	Blue Gate Bentonite	2984' 3540'	
				Tununk Shale	3443'	
				Ferron Sandston	3134'	



Re: Notice of Address Change, Merger and Name Change
Address Change effective **December 2, 2002**
Merger and Name Change effective **December 31, 2002**

Divisions of Oil, Gas, and Mining
Attn: Mr. John Baza
1594 West North Temple,
Suite 1210, P. O. Box 145801
Salt Lake City, UT 84114-5801

Gentlemen:

1. Effective December 2, 2002, Phillips Petroleum Company will close its Englewood, Colorado Rocky Mountain Region office. After that time, all correspondence, notices and invoice for Land related matters should be directed to the address(es) noted below. Note that until December 31, 2002, all properties in which Phillips held an interest will continue to be operated by Phillips Petroleum Company, a wholly-owned subsidiary of ConocoPhillips.

2. On December 31, 2002, Phillips Petroleum Company and Conoco Inc. will merge, and the surviving corporation will be renamed "ConocoPhillips Company".

In accordance with the notice provisions of the Operating Agreements and other agreements, if any, between our companies, please adjust your company/organization records, effective for address purposes as of December 2, 2002, and for company name purposes, as of January 1, 2003, to reflect the following information for addressing and delivery of notices, invoicing and payment, and communications with ConocoPhillips Company. This will also apply to Lease Sale notices and other lease-related correspondence and notifications.

U.S. Mail Address:

ConocoPhillips Company
P.O. Box 2197
Houston, Texas 77252
Attn: Chief Landman,
San Juan/Rockies

Physical Address & Overnight Delivery:

ConocoPhillips Company
550 Westlake Park Blvd.
Three Westlake Park
3WL, Room WL 9000
Houston, Texas 77079
Attn: Chief Landman,
San Juan/Rockies

All ballots and official notices/responses sent by facsimile transmission should be sent to the following contact:

Attn: Chief Landman,
San Juan/Rockies

Fax No.: 832-486-2688 or
832-486-2687

Please contact the undersigned immediately if you have any questions. This notice does not apply to royalty inquiries, joint interest billings, or revenue remittances. Please continue to use the same addresses you are currently using for these matters

Sincerely,

William Rainbolt

RECEIVED

DEC 02 2002

DIVISION OF
OIL, GAS AND MINING



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

IN REPLY REFER TO
UT-922

December 3, 2002

Phillips Petroleum Company
Attn: Gregory A. Reeves
P.O. Box 2197
Houston, Texas 77252

Re: Initial Consolidated Ferron Formation
Participating Area "A,C,D"
Drunkards Wash Unit
Carbon and Emery Counties, Utah

Gentlemen:

The Initial Consolidated Ferron Formation Participating Area "A,C,D", Drunkards Wash Unit, UTU67921F, is hereby approved effective as of July 1, 2002, pursuant to Section 11 of the Drunkards Wash Unit Agreement, Carbon and Emery Counties, Utah.

The Initial Consolidated Ferron Formation Participating Area "A,C,D" results in the addition of 800.00 acres to the participating area for a total of 67,450.93 acres and is based upon the completion of the following wells, as capable of producing unitized substances in paying quantities.

WELL NO.	API NO.	LOCATION	LEASE NO.
10-250	43-007-30461	NE, 10-15S-8E	UTU60402
22-568	43-015-30534	NE, 22-16S-8E	STATE
23-565	43-015-30538	NW, 23-16S-8E	STATE
23-567	43-015-30513	SW, 23-16S-8E	STATE
27-584	43-015-30545	NE, 27-16S-8E	STATE

RECEIVED

DEC 04 2002

DIVISION OF
OIL, GAS AND MINING

Copies of the approved request are being distributed to the appropriate agencies and one copy is returned herewith. Please advise all interested parties of the approval of the Initial Consolidated Ferron Formation Participating Area "A,C,D", Drunkards Wash Unit and the effective date.

Sincerely,

/s/ Robert A. Henricks

Robert A. Henricks
Chief, Branch of Fluid Minerals

Enclosure

bcc: Minerals Adjudication Group w/exhibit B
Division of Oil, Gas & Mining
Drunkards Wash Unit w/enclosure
MMS - Data Management Division (Attn: Rose Davalos)
Field Manager - Moab w/enclosure
SITLA
Sovereign Lands
Agr. Sec. Chron.
Fluid Chron.

UT922:TATHOMPSON:tt:12/3/02

RECEIVED

DEC 04 2002

DIVISION OF
OIL, GAS AND MINING

DRUNKARDS WASH UNIT


Carbon & Emery Counties, Utah

EFFECTIVE: DECEMBER 28, 1990

RECEIVED

DEC 04 2002

DIVISION OF
OIL, GAS AND MINING

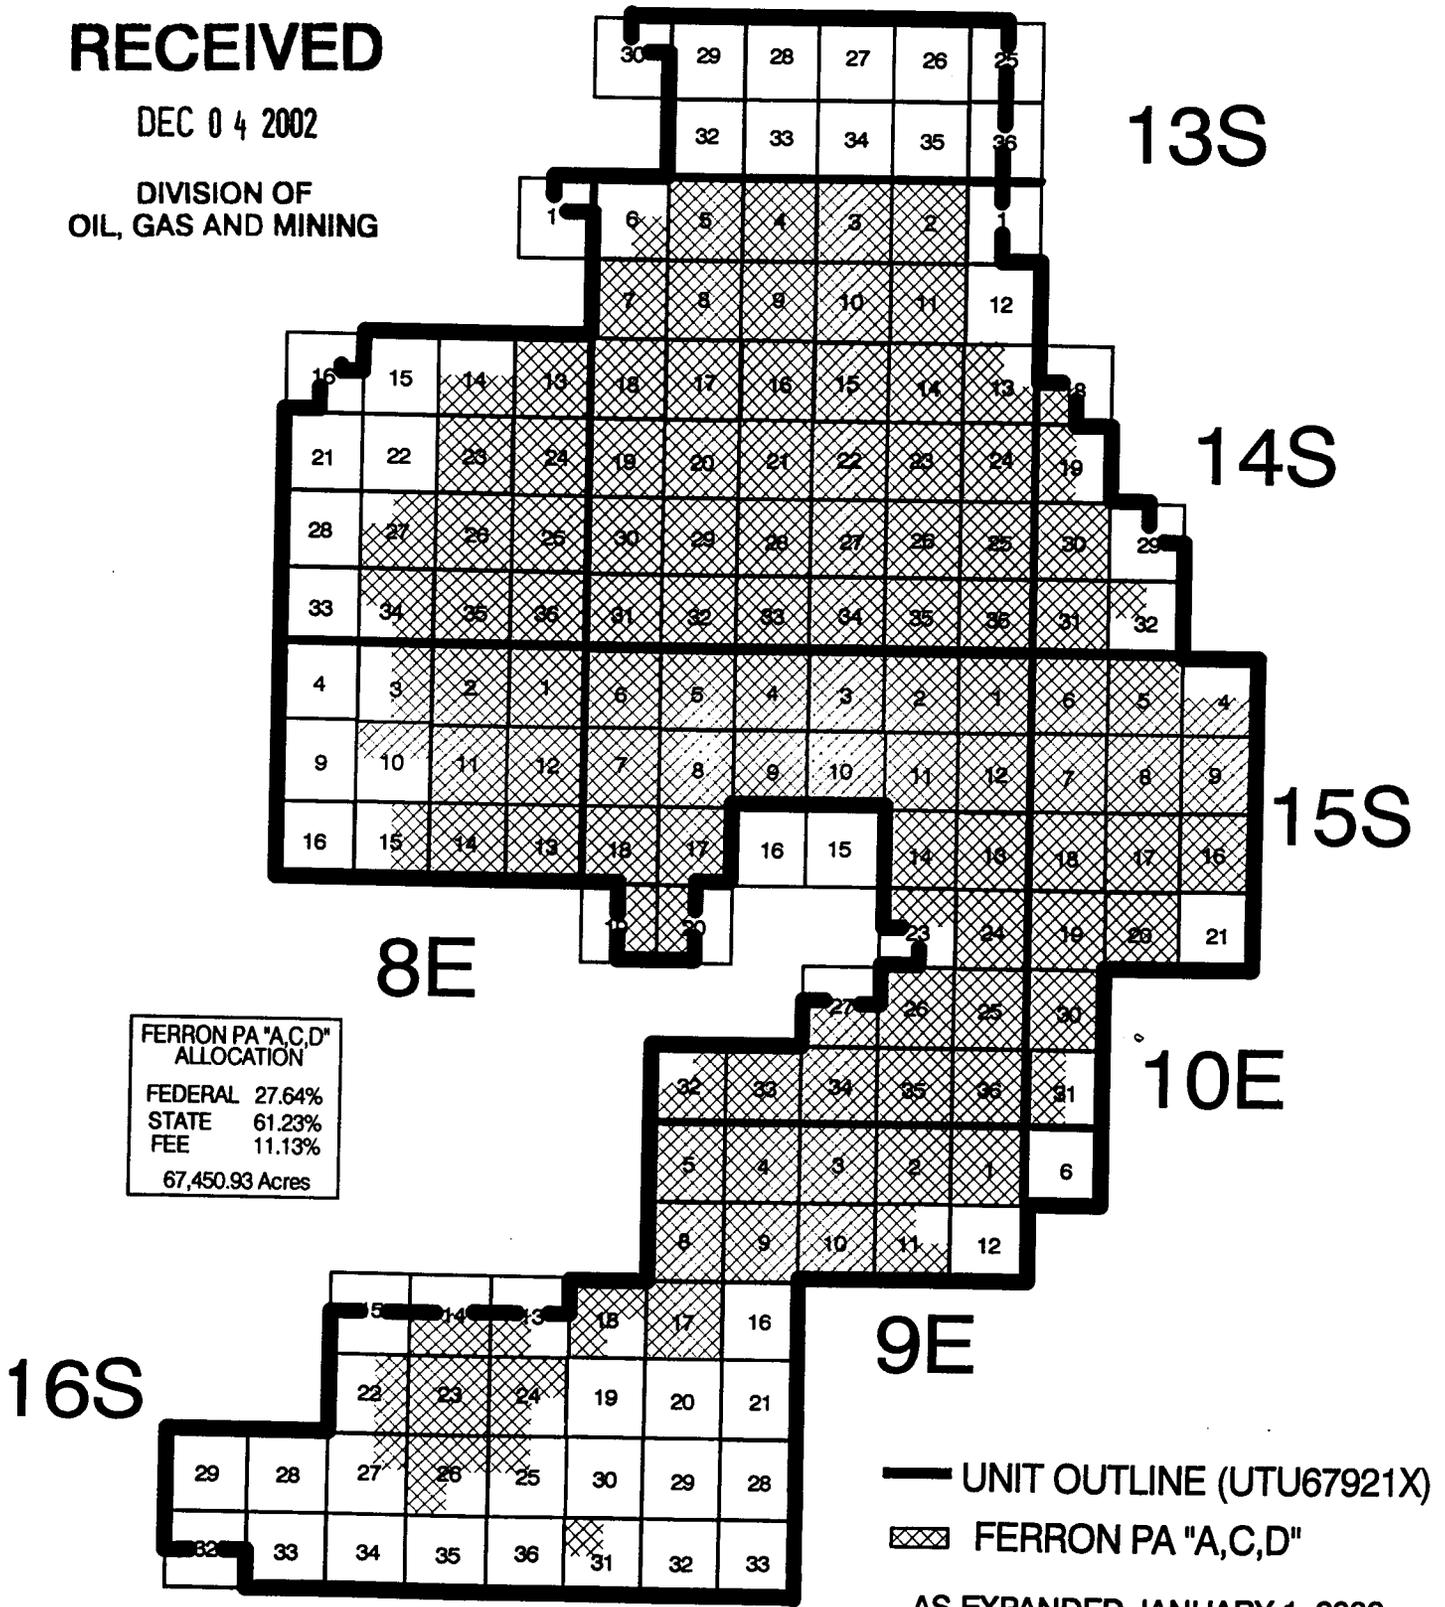

FERRON PA "A,C,D" ALLOCATION	
FEDERAL	27.64%
STATE	61.23%
FEE	11.13%
67,450.93 Acres	

— UNIT OUTLINE (UTU67921X)
 ☒ FERRON PA "A,C,D"

AS EXPANDED JANUARY 1, 2002

99,002.16 ACRES

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER:
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <u>All</u>	8. WELL NAME and NUMBER: See Attached List	
2. NAME OF OPERATOR: Phillips Petroleum Company		9. API NUMBER: See List
3. ADDRESS OF OPERATOR: 980 Plaza Office CITY Bartlesville STATE OK ZIP 74004	PHONE NUMBER: (918) 661-4415	10. FIELD AND POOL, OR WILDCAT:
4. LOCATION OF WELL FOOTAGES AT SURFACE: See Attached List		COUNTY:
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Conoco Inc. was merged into Phillips Petroleum Company, the surviving corporation, on December 31, 2002. In connection with this merger and effective on the same date, the name of the surviving corporation was changed to "ConocoPhillips Company". We are requesting that a new Operator Number be assigned to ConocoPhillips Company.

Please send production reporting forms to Herb Henderson at ConocoPhillips Company, 315 S. Johnstone, 980 Plaza Office, Bartlesville, OK 74004. Herb's phone number is 918-661-4415.

Current Operator
Phillips Petroleum Company


Steve de Albuquerque


New Operator
ConocoPhillips Company


Yolanda Perez

RECEIVED

JAN 08 2003

DIV. OF OIL, GAS & MINING

NAME (PLEASE PRINT) <u>Yolanda Perez</u>	TITLE <u>Sr. Regulatory Analyst</u>
SIGNATURE 	DATE <u>12/30/2002</u>

(This space for State use only)




SECRETARY'S CERTIFICATE

I, the undersigned, Jennifer M. Garcia, Assistant Secretary of ConocoPhillips Company, formerly Phillips Petroleum Company, organized and existing under and by virtue of the laws of the State of Delaware (the "Corporation"), hereby certify that:

1. As Assistant Secretary I am authorized to execute this certificate on behalf of the Corporation.
2. The attached photocopy of the Certificate of Amendment to the Restated Certificate of Incorporation of Phillips Petroleum Company (to be renamed ConocoPhillips Company) is a true and correct copy as filed in the office of the Secretary of State of Delaware on the 12th day of December 2002, with an effective date of January 1, 2003 and such Certificate of Amendment has not been modified, amended, rescinded or revoked and is in full force and effect as of the date hereof.
3. The attached photocopy of the Certificate of Merger of Conoco Inc. with and into ConocoPhillips Company is a true and correct copy as filed in the office of the Secretary of State of Delaware on the 12th day of December 2002, with an effective date of December 31, 2002 and such Certificate of Merger has not been modified, amended, rescinded or revoked and is in full force and effect as of the date hereof.

IN WITNESS WHEREOF, I have hereunto set my hand as Assistant Secretary and affixed the corporate seal of the Corporation this 7th day of January 2003.



 Assistant Secretary
 ConocoPhillips Company

STATE OF TEXAS §
 §
 COUNTY OF HARRIS §

This instrument was acknowledged before me on January 7, 2003, by Jennifer M. Garcia, Assistant Secretary of ConocoPhillips Company, a Delaware corporation, on behalf of said Corporation.



RECEIVED
 JAN 08 2003


 Notary Public

Delaware

PAGE 1

The First State

I, HARRIET SMITH WINDSOR, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF AMENDMENT OF "PHILLIPS PETROLEUM COMPANY", CHANGING ITS NAME FROM "PHILLIPS PETROLEUM COMPANY" TO "CONOCOPHILLIPS COMPANY", FILED IN THIS OFFICE ON THE TWELFTH DAY OF DECEMBER, A.D. 2002, AT 1:41 O'CLOCK P.M.

AND I DO HEREBY FURTHER CERTIFY THAT THE EFFECTIVE DATE OF THE AFORESAID CERTIFICATE OF AMENDMENT IS THE THIRTY-FIRST DAY OF DECEMBER, A.D. 2002, AT 11 O'CLOCK P.M.

RECEIVED

JAN 08 2003

DIV. OF OIL, GAS & MINING



Harriet Smith Windsor

Harriet Smith Windsor, Secretary of State

AUTHENTICATION: 2183360

0064324 8100

030002793

DATE: 01-02-03

CERTIFICATE OF AMENDMENT
to the
RESTATED CERTIFICATE OF INCORPORATION
of
PHILLIPS PETROLEUM COMPANY
(to be renamed ConocoPhillips Company)

Phillips Petroleum Company ("Phillips"), a corporation organized and existing under the General Corporation Law of the State of Delaware (the "DGCL"), hereby certifies that:

1. The amendments to Phillips' Restated Certificate of Incorporation set forth below were duly adopted in accordance with the provisions of Section 242 of the DGCL and have been consented to in writing by the sole stockholder of Phillips in accordance with Section 228 of the DGCL.

2. Phillips' Restated Certificate of Incorporation is hereby amended by deleting Article I thereof and replacing in lieu thereof a new Article I reading in its entirety as follows:

"The name of the corporation (which is hereinafter referred to as the "Corporation") is ConocoPhillips Company."

3. Phillips' Restated Certificate of Incorporation is hereby amended by deleting Section 1 of Article IV thereof and replacing in lieu thereof a new Section 1 reading in its entirety as follows:

"Section 1. The Corporation shall be authorized to issue 2,100 shares of capital stock, of which 2,100 shares shall be shares of Common Stock, \$.01 par value ("Common Stock")."

4. Pursuant to Section 103(d) of the DGCL, this amendment will become effective at 11:00 p.m., Eastern time, on December 31, 2002.

IN WITNESS WHEREOF, Phillips has caused this certificate to be executed this 12th day of December, 2002.

PHILLIPS PETROLEUM COMPANY

WJ

By: 
Name: Rick A. Harrington
Title: Senior Vice President, Legal,
and General Counsel

RECEIVED
JAN 08 2003
DIV. OF OIL, GAS & MINING

Delaware

PAGE 1

The First State

I, HARRIET SMITH WINDSOR, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF MERGER, WHICH MERGES:

"CONOCO INC.", A DELAWARE CORPORATION,


WITH AND INTO "CONOCOPHILLIPS COMPANY" UNDER THE NAME OF "CONOCOPHILLIPS COMPANY", A CORPORATION ORGANIZED AND EXISTING UNDER THE LAWS OF THE STATE OF DELAWARE, AS RECEIVED AND FILED IN THIS OFFICE THE TWELFTH DAY OF DECEMBER, A.D. 2002, AT 1:44 O'CLOCK P.M.

AND I DO HEREBY FURTHER CERTIFY THAT THE EFFECTIVE DATE OF THE AFORESAID CERTIFICATE OF MERGER IS THE THIRTY-FIRST DAY OF DECEMBER, A.D. 2002, AT 11:59 O'CLOCK P.M.

RECEIVED

JAN 08 2003

DIV. OF OIL, GAS & MINING



Harriet Smith Windsor
Harriet Smith Windsor, Secretary of State

AUTHENTICATION: 2183370

DATE: 01-02-03

0064324 8100M

030002793

CERTIFICATE OF MERGER

of

Conoco Inc.
(a Delaware corporation)

with and into

ConocoPhillips Company
(a Delaware corporation)

Phillips Petroleum Company, a Delaware corporation to be renamed ConocoPhillips Company prior to the effective time of this certificate of merger (the "Surviving Corporation"), in compliance with the requirements of the General Corporation Law of the State of Delaware (the "DGCL") and desiring to effect a merger of Conoco Inc., a Delaware corporation formerly incorporated under the name Du Pont Holdings, Inc. (the "Merging Corporation," and together with the Surviving Corporation, the "Constituent Corporations"), with and into the Surviving Corporation, and acting by its duly authorized officer, DOES HEREBY CERTIFY that:

First: As of the date hereof, the name and state of incorporation of each of the Constituent Corporations of the merger are as follows:

<u>NAME</u>	<u>STATE OF INCORPORATION</u>
PHILLIPS PETROLEUM COMPANY	Delaware
CONOCO INC.	Delaware

Second: An agreement and plan of merger has been approved, adopted, certified, executed and acknowledged by each of the Constituent Corporations in accordance with the requirements of Section 251 of the DGCL;

Third: The name of the Surviving Corporation will be ConocoPhillips Company;

Fourth: The Certificate of Incorporation of ConocoPhillips Company immediately prior to the merger shall be the Certificate of Incorporation of the Surviving Corporation until such time as it may be amended in accordance with applicable law and the provisions thereof;

Fifth: The executed agreement and plan of merger is on file at an office of the Surviving Corporation, the address of which is 600 North Dairy Ashford, Houston, Texas 77079;

RECEIVED

JAN 08 2003

DIV. OF OIL, GAS & MINING

Sixth: A copy of the agreement and plan of merger will be furnished by the Surviving Corporation, on request and without cost, to any stockholder of any Constituent Corporation; and

Seventh: Pursuant to Section 103(d) of the DGCL, this certificate of merger will become effective at 11:59 p.m., Eastern time, on December 31, 2002.

Dated: December 12, 2002

PHILLIPS PETROLEUM COMPANY
(a Delaware corporation)

WJ

By: 
Name: Rick A. Harrington
Title: Senior Vice President, Legal,
and General Counsel

RECEIVED
JAN 08 2003
DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF COMMERCE
REGISTRATION

REFERENCE NUMBER(S), CLASSIFICATION(S) & DETAIL(S)

CONOCOPHILLIPS COMPANY

Corporation - Foreign - Profit
562960-0143

EFFECTIVE
06/14/1946

EXPIRATION
*RENEWAL

UNITED STATES CORP CO
CONOCOPHILLIPS COMPANY
GATEWAY TOWER EAST STE 900
10 EAST SOUTH TEMPLE
SLC UT 84133

RECEIVED

JAN 08 2003

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF COMMERCE
DIVISION OF CORPORATIONS & COMMERCIAL CODE
REGISTRATION

EFFECTIVE DATE: 06/14/1946
EXPIRATION DATE: *RENEWAL
ISSUED TO: CONOCOPHILLIPS COMPANY



REFERENCE NUMBER(S), CLASSIFICATION(S) & DETAIL(S)

562960-0143 Corporation - Foreign - Profit

*RENEWAL

You will need to renew your registration each anniversary date of the effective date.

Exceptions: DBAs and Business Trusts renew every three (3) years from the effective date.

Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twpn	Twprd	Rngn	Rngd
43-007-30887-00-00	ANDREEN 32-529	Gas Well	APD	32	14	S	10	E
43-007-30865-00-00	COTNER 29-549	Gas Well	APD	29	14	S	10	E
43-007-30837-00-00	DALLIN 32-615	Gas Well	APD	32	13	S	9	E
43-047-34551-00-00	FED 43-24-3 #1	Gas Well	APD	24	10	S	17	E
43-047-33982-00-00	FEDERAL 12-17 #1	Gas Well	APD	17	10	S	18	E
43-047-34471-00-00	FEDERAL 12-29-7 1	Gas Well	APD	29	9	S	19	E
43-047-34472-00-00	FEDERAL 31-31-6 1	Gas Well	APD	31	9	S	19	E
43-007-30864-00-00	MCKENDRICK 29-548	Gas Well	APD	29	14	S	10	E
43-015-30512-00-00	PPCO 19-379	Gas Well	APD	19	16	S	9	E
43-015-30515-00-00	PPCO 24-562	Gas Well	APD	24	16	S	8	E
43-015-30548-00-00	PPCO 30-605	Gas Well	APD	30	16	S	9	E
43-007-30888-00-00	PRICE 32-438	Gas Well	APD	32	14	S	10	E
43-007-30813-00-00	RITZAKIS 33-514	Gas Well	APD	33	13	S	9	E
43-007-30766-00-00	RITZAKIS 33-516	Gas Well	APD	33	13	S	9	E
43-007-30838-00-00	ROWLEY 32-616	Gas Well	APD	32	13	S	9	E
43-007-30863-00-00	SCHMIDT 29-531	Gas Well	APD	29	14	S	10	E
43-007-30797-00-00	SEELY 15-498	Gas Well	APD	15	14	S	8	E
43-007-30798-00-00	SEELY 15-499	Gas Well	APD	15	14	S	8	E
43-007-30799-00-00	SEELY 15-500	Gas Well	APD	15	14	S	8	E
43-007-30796-00-00	SEELY 22-492	Gas Well	APD	22	14	S	8	E
43-007-30801-00-00	SEELY 22-502	Gas Well	APD	22	14	S	8	E
43-007-30802-00-00	SEELY 22-503	Gas Well	APD	22	14	S	8	E
43-007-30711-00-00	USA 09-452	Gas Well	APD	9	15	S	8	E
43-015-30351-00-00	USA 11-313	Gas Well	APD	11	16	S	9	E
43-015-30398-00-00	USA 12-385	Gas Well	APD	12	16	S	9	E
43-015-30409-00-00	USA 12-426	Gas Well	APD	12	16	S	9	E
43-007-30805-00-00	USA 14-490	Gas Well	APD	14	14	S	8	E
43-007-30806-00-00	USA 14-491	Gas Well	APD	14	14	S	8	E
43-007-30676-00-00	USA 15-421	Gas Well	APD	15	15	S	8	E
43-015-30417-00-00	USA 21-427	Gas Well	APD	21	16	S	9	E
43-015-30416-00-00	USA 21-428	Gas Well	APD	21	16	S	9	E
43-015-30415-00-00	USA 21-429	Gas Well	APD	21	16	S	9	E
43-007-30515-00-00	USA 31-309	Gas Well	APD	31	15	S	10	E
43-007-30835-00-00	USA 33-515	Gas Well	APD	33	13	S	9	E
43-007-30836-00-00	USA 33-624	Gas Well	APD	33	13	S	9	E
43-007-30803-00-00	USA 34-518	Gas Well	APD	34	14	S	8	E
43-007-30478-00-00	UTAH 05-224	Gas Well	APD	5	15	S	9	E
43-015-30411-00-00	UTAH 16-365	Gas Well	APD	16	16	S	9	E
43-015-30412-00-00	UTAH 16-366	Gas Well	APD	16	16	S	9	E
43-015-30413-00-00	UTAH 16-430	Gas Well	APD	16	16	S	9	E
43-015-30299-00-00	UTAH 18-374	Gas Well	APD	18	16	S	9	E
43-015-30420-00-00	UTAH 19-377	Gas Well	APD	19	16	S	9	E
43-015-30492-00-00	UTAH 19-378	Gas Well	APD	19	16	S	9	E
43-007-30891-00-00	UTAH 19-533	Gas Well	APD	19	14	S	10	E
43-015-30414-00-00	UTAH 20-381	Gas Well	APD	20	16	S	9	E
43-015-30421-00-00	UTAH 20-382	Gas Well	APD	20	16	S	9	E
43-015-30518-00-00	UTAH 25-576	Gas Well	APD	25	16	S	8	E
43-015-30539-00-00	UTAH 25-578	Gas Well	APD	25	16	S	8	E
43-015-30540-00-00	UTAH 25-579	Gas Well	APD	25	16	S	8	E
43-007-30817-00-00	UTAH 25-618	Gas Well	APD	25	13	S	9	E
43-015-30543-00-00	UTAH 26-582	Gas Well	APD	26	16	S	8	E
43-015-30547-00-00	UTAH 29-608	Gas Well	APD	29	16	S	9	E
43-007-30889-00-00	UTAH 32-128	Gas Well	APD	32	14	S	10	E
43-007-30814-00-00	UTAH 35-506	Gas Well	APD	35	13	S	9	E

Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twpn	Twps	Rngn	Rngd
43-047-33750-00-00	FEDERAL 34-29	Gas Well	P	29	9	S	19	E
43-007-30782-00-00	GAROFOLA 26-482	Gas Well	P	26	15	S	8	E
43-007-30335-00-00	GIACOLETTO 11-113	Gas Well	P	11	14	S	9	E
43-007-30407-00-00	GIACOLETTO 13-120	Gas Well	P	13	14	S	9	E
43-007-30345-00-00	GIACOLETTO 14-121	Gas Well	P	14	14	S	9	E
43-007-30487-00-00	HELPER & ASSOC 07-307	Gas Well	P	7	15	S	9	E
43-007-30459-00-00	HELPER & ASSOC 18-236	Gas Well	P	18	15	S	9	E
43-007-30720-00-00	HELPER & ASSOC 18-308	Gas Well	P	18	15	S	9	E
43-007-30412-00-00	HELPER & ASSOC 8-232	Gas Well	P	8	15	S	9	E
43-007-30258-00-00	HELPER & ASSOCIATES 7-84	Gas Well	P	7	15	S	9	E
43-007-30588-00-00	JENSEN 16-132	Gas Well	P	16	15	S	10	E
43-007-30420-00-00	KAKATSIDES 31-197	Gas Well	P	31	14	S	9	E
43-007-30296-00-00	LDS 17-133	Gas Well	P	17	15	S	10	E
43-007-30323-00-00	PAAR 16-146	Gas Well	P	16	14	S	9	E
43-047-34286-00-00	PETES WASH 23-12 #1	Gas Well	P	12	10	S	17	E
43-007-30748-00-00	PIERUCCI 25-461	Gas Well	P	25	15	S	8	E
43-007-30749-00-00	PIERUCCI 25-462	Gas Well	P	25	15	S	8	E
43-007-30754-00-00	PIERUCCI 26-463	Gas Well	P	26	15	S	8	E
43-007-30755-00-00	PIERUCCI 26-464	Gas Well	P	26	15	S	8	E
43-007-30745-00-00	PIERUCCI 26-481	Gas Well	P	26	15	S	8	E
43-007-30117-00-00	PINNACLE PEAK 19-171	Gas Well	P	19	14	S	9	E
43-007-30845-00-00	PMC 10-526	Gas Well	P	10	15	S	8	E
43-007-30282-00-00	POWELL 19-104	Gas Well	P	19	15	S	10	E
43-007-30283-00-00	POWELL 19-105	Gas Well	P	19	15	S	10	E
43-007-30346-00-00	POWELL 30-173	Gas Well	P	30	15	S	10	E
43-015-30279-00-00	PPCO 10-557	Gas Well	P	10	16	S	8	E
43-015-30494-00-00	PPCO 15-555	Gas Well	P	15	16	S	8	E
43-007-30211-00-00	PRETTYMAN 10-15-34	Gas Well	P	10	14	S	9	E
43-007-30340-00-00	PRETTYMAN 11-114	Gas Well	P	11	14	S	9	E
43-007-30653-00-00	RGC 21-331	Gas Well	P	21	15	S	9	E
43-007-30743-00-00	RGC 21-332	Gas Well	P	21	15	S	9	E
43-007-30747-00-00	RGC 25-460	Gas Well	P	25	15	S	8	E
43-007-30559-00-00	RGC 28-318	Gas Well	P	28	15	S	9	E
43-007-30518-00-00	RGC 28-319	Gas Well	P	28	15	S	9	E
43-007-30509-00-00	RITZAKIS 03-408	Gas Well	P	3	14	S	9	E
43-007-30473-00-00	RITZAKIS 5-304	Gas Well	P	5	14	S	9	E
43-007-30474-00-00	RITZAKIS 5-305	Gas Well	P	5	14	S	9	E
43-007-30475-00-00	RITZAKIS 8-298	Gas Well	P	8	14	S	9	E
43-007-30479-00-00	RITZAKIS 8-299	Gas Well	P	8	14	S	9	E
43-007-30476-00-00	RITZAKIS 8-300	Gas Well	P	8	14	S	9	E
43-007-30374-00-00	ROBERTSON 32-127	Gas Well	P	32	14	S	10	E
43-007-30610-00-00	SAMPINOS 16-131	Gas Well	P	16	15	S	10	E
43-007-30723-00-00	SAMPINOS 16-454	Gas Well	P	16	15	S	10	E
43-007-30765-00-00	SAMPINOS 16-521	Gas Well	P	16	15	S	10	E
43-007-30800-00-00	SEELY 22-501	Gas Well	P	22	14	S	8	E
43-007-30130-00-00	ST OF UT 25-9-1	Gas Well	P	25	14	S	9	E
43-007-30142-00-00	ST OF UT 36-3-4	Gas Well	P	36	14	S	9	E
43-007-30116-00-00	STELLA-HAMAKER 10-174	Gas Well	P	10	15	S	8	E
43-007-30746-00-00	TABOR 23-468	Gas Well	P	23	15	S	8	E
43-007-30319-00-00	TELONIS 15-142	Gas Well	P	15	14	S	9	E
43-007-30322-00-00	TELONIS 16-145	Gas Well	P	16	14	S	9	E
43-007-30300-00-00	TELONIS 19-150	Gas Well	P	19	14	S	9	E
43-007-30299-00-00	TELONIS 19-151	Gas Well	P	19	14	S	9	E
43-007-30327-00-00	TELONIS 20-152	Gas Well	P	20	14	S	9	E

Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twpn	Twpd	Rngn	Rngd
43-007-30631-00-00	USA 13-419	Gas Well	P	13	15	S	8	E
43-007-30707-00-00	USA 13-447	Gas Well	P	13	14	S	8	E
43-007-30706-00-00	USA 13-470	Gas Well	P	13	14	S	8	E
43-007-30789-00-00	USA 13-474	Gas Well	P	13	14	S	8	E
43-007-30790-00-00	USA 13-475	Gas Well	P	13	14	S	8	E
43-007-30568-00-00	USA 13-91	Gas Well	P	13	14	S	9	E
43-007-30404-00-00	USA 14-122	Gas Well	P	14	14	S	9	E
43-015-30418-00-00	USA 1-425	Gas Well	P	1	16	S	9	E
43-007-30579-00-00	USA 14-325	Gas Well	P	14	15	S	8	E
43-007-30634-00-00	USA 14-386	Gas Well	P	14	15	S	8	E
43-007-30646-00-00	USA 14-416	Gas Well	P	14	15	S	8	E
43-007-30647-00-00	USA 14-417	Gas Well	P	14	15	S	8	E
43-007-30791-00-00	USA 14-476	Gas Well	P	14	14	S	8	E
43-007-30792-00-00	USA 14-477	Gas Well	P	14	14	S	8	E
43-007-30529-00-00	USA 14-74	Gas Well	P	14	14	S	9	E
43-007-30263-00-00	USA 14-75	Gas Well	P	14	14	S	9	E
43-007-30450-00-00	USA 15-176	Gas Well	P	15	14	S	9	E
43-007-30423-00-00	USA 15-177	Gas Well	P	15	14	S	9	E
43-007-30690-00-00	USA 15-420	Gas Well	P	15	15	S	8	E
43-007-30691-00-00	USA 15-422	Gas Well	P	15	15	S	8	E
43-007-30264-00-00	USA 15-88	Gas Well	P	15	14	S	9	E
43-007-30422-00-00	USA 17-179	Gas Well	P	17	14	S	9	E
43-007-30622-00-00	USA 17-180A	Gas Well	P	17	14	S	9	E
43-007-30618-00-00	USA 18-181	Gas Well	P	18	14	S	9	E
43-007-30417-00-00	USA 18-182	Gas Well	P	18	14	S	9	E
43-007-30619-00-00	USA 18-435	Gas Well	P	18	14	S	9	E
43-007-30393-00-00	USA 19-222	Gas Well	P	19	15	S	10	E
43-007-30392-00-00	USA 19-73	Gas Well	P	19	15	S	10	E
43-007-30448-00-00	USA 20-287	Gas Well	P	20	15	S	10	E
43-007-30451-00-00	USA 20-288	Gas Well	P	20	15	S	10	E
43-007-30590-00-00	USA 20-398	Gas Well	P	20	15	S	10	E
43-007-30591-00-00	USA 20-399	Gas Well	P	20	15	S	10	E
43-007-30424-00-00	USA 21-184	Gas Well	P	21	14	S	9	E
43-007-30425-00-00	USA 21-35	Gas Well	P	21	14	S	9	E
43-007-30426-00-00	USA 22-185	Gas Well	P	22	14	S	9	E
43-007-30477-00-00	USA 22-186	Gas Well	P	22	14	S	9	E
43-007-30700-00-00	USA 22-466	Gas Well	P	22	15	S	8	E
43-007-30611-00-00	USA 23-423	Gas Well	P	23	14	S	8	E
43-007-30650-00-00	USA 23-445	Gas Well	P	23	15	S	8	E
43-007-30704-00-00	USA 23-451	Gas Well	P	23	15	S	8	E
43-007-30503-00-00	USA 23-467	Gas Well	P	23	15	S	8	E
43-007-30793-00-00	USA 23-478	Gas Well	P	23	14	S	8	E
43-007-30794-00-00	USA 23-479	Gas Well	P	23	14	S	8	E
43-007-30795-00-00	USA 23-480	Gas Well	P	23	14	S	8	E
43-007-30469-00-00	USA 24-183	Gas Well	P	24	14	S	8	E
43-007-30612-00-00	USA 24-387	Gas Well	P	24	14	S	8	E
43-007-30613-00-00	USA 24-388	Gas Well	P	24	14	S	8	E
43-007-30651-00-00	USA 24-443	Gas Well	P	24	15	S	8	E
43-007-30648-00-00	USA 24-444	Gas Well	P	24	15	S	8	E
43-007-30708-00-00	USA 24-446	Gas Well	P	24	14	S	8	E
43-007-30652-00-00	USA 24-448	Gas Well	P	24	15	S	8	E
43-007-30705-00-00	USA 24-449	Gas Well	P	24	15	S	8	E
43-007-30505-00-00	USA 25-459	Gas Well	P	25	15	S	8	E
43-007-30614-00-00	USA 26-393	Gas Well	P	26	14	S	8	E

Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twpn	Twpd	Rngn	Rngd
43-007-30430-00-00	UTAH 06-223	Gas Well	P	6	15	S	9	E
43-007-30562-00-00	UTAH 06-330	Gas Well	P	6	15	S	9	E
43-007-30716-00-00	UTAH 06-483	Gas Well	P	6	15	S	9	E
43-007-30409-00-00	UTAH 07-234	Gas Well	P	7	15	S	9	E
43-007-30421-00-00	UTAH 07-235	Gas Well	P	7	15	S	9	E
43-007-30411-00-00	UTAH 08-231	Gas Well	P	8	15	S	9	E
43-007-30488-00-00	UTAH 08-233	Gas Well	P	8	15	S	9	E
43-015-30464-00-00	UTAH 08-354	Gas Well	P	8	16	S	9	E
43-015-30378-00-00	UTAH 08-355	Gas Well	P	8	16	S	9	E
43-015-30379-00-00	UTAH 08-356	Gas Well	P	8	16	S	9	E
43-015-30380-00-00	UTAH 08-357	Gas Well	P	8	16	S	9	E
43-007-30449-00-00	UTAH 09-227	Gas Well	P	9	15	S	9	E
43-007-30561-00-00	UTAH 09-329	Gas Well	P	9	15	S	9	E
43-015-30300-00-00	UTAH 09-358	Gas Well	P	9	16	S	9	E
43-015-30407-00-00	UTAH 09-359	Gas Well	P	9	16	S	9	E
43-015-30397-00-00	UTAH 09-360	Gas Well	P	9	16	S	9	E
43-015-30408-00-00	UTAH 09-361	Gas Well	P	9	16	S	9	E
43-007-30580-00-00	UTAH 09-412	Gas Well	P	9	15	S	10	E
43-007-30605-00-00	UTAH 09-413	Gas Well	P	9	15	S	10	E
43-007-30657-00-00	UTAH 09-450	Gas Well	P	9	15	S	10	E
43-007-30722-00-00	UTAH 09-453	Gas Well	P	9	15	S	10	E
43-007-30302-00-00	UTAH 10-01-36	Gas Well	P	10	15	S	9	E
43-007-30298-00-00	UTAH 10-219	Gas Well	P	10	15	S	9	E
43-007-30432-00-00	UTAH 10-220	Gas Well	P	10	15	S	9	E
43-007-30303-00-00	UTAH 10-221	Gas Well	P	10	15	S	9	E
43-007-30228-00-00	UTAH 11-50	Gas Well	P	11	15	S	9	E
43-007-30229-00-00	UTAH 11-51	Gas Well	P	11	15	S	9	E
43-007-30230-00-00	UTAH 11-52	Gas Well	P	11	15	S	9	E
43-007-30231-00-00	UTAH 11-53	Gas Well	P	11	15	S	9	E
43-007-30467-00-00	UTAH 1-209	Gas Well	P	1	15	S	8	E
43-007-30210-00-00	UTAH 12-15-37	Gas Well	P	12	15	S	9	E
43-007-30232-00-00	UTAH 12-54	Gas Well	P	12	15	S	9	E
43-007-30233-00-00	UTAH 12-55	Gas Well	P	12	15	S	9	E
43-007-30234-00-00	UTAH 12-56	Gas Well	P	12	15	S	9	E
43-015-30493-00-00	UTAH 13-376	Gas Well	P	13	16	S	8	E
43-015-30301-00-00	UTAH 13-550	Gas Well	P	13	16	S	8	E
43-007-30243-00-00	UTAH 13-65	Gas Well	P	13	15	S	9	E
43-007-30244-00-00	UTAH 13-66	Gas Well	P	13	15	S	9	E
43-007-30245-00-00	UTAH 13-67	Gas Well	P	13	15	S	9	E
43-007-30246-00-00	UTAH 13-68	Gas Well	P	13	15	S	9	E
43-007-30439-00-00	UTAH 13-92	Gas Well	P	13	14	S	9	E
43-007-30220-00-00	UTAH 1-42	Gas Well	P	1	15	S	9	E
43-007-30221-00-00	UTAH 1-43	Gas Well	P	1	15	S	9	E
43-007-30222-00-00	UTAH 1-44	Gas Well	P	1	15	S	9	E
43-007-30223-00-00	UTAH 1-45	Gas Well	P	1	15	S	9	E
43-015-30330-00-00	UTAH 14-551	Gas Well	P	14	16	S	8	E
43-015-30331-00-00	UTAH 14-552	Gas Well	P	14	16	S	8	E
43-007-30239-00-00	UTAH 14-61	Gas Well	P	14	15	S	9	E
43-007-30240-00-00	UTAH 14-62	Gas Well	P	14	15	S	9	E
43-007-30241-00-00	UTAH 14-63	Gas Well	P	14	15	S	9	E
43-007-30242-00-00	UTAH 14-64	Gas Well	P	14	15	S	9	E
43-015-30334-00-00	UTAH 15-553	Gas Well	P	15	16	S	8	E
43-007-30416-00-00	UTAH 17-101	Gas Well	P	17	15	S	10	E
43-007-30277-00-00	UTAH 17-102	Gas Well	P	17	15	S	10	E

Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twpn	Twprd	Rngn	Rngd
43-007-30255-00-00	UTAH 24-80	Gas Well	P	24	15	S	9	E
43-007-30256-00-00	UTAH 24-81	Gas Well	P	24	15	S	9	E
43-007-30267-00-00	UTAH 24-86	Gas Well	P	24	15	S	9	E
43-007-30375-00-00	UTAH 24-87	Gas Well	P	24	15	S	9	E
43-007-30227-00-00	UTAH 2-49	Gas Well	P	2	15	S	9	E
43-007-30157-00-00	UTAH 25-11-7	Gas Well	P	25	14	S	9	E
43-007-30399-00-00	UTAH 25-134	Gas Well	P	25	15	S	9	E
43-007-30400-00-00	UTAH 25-252	Gas Well	P	25	15	S	9	E
43-007-30401-00-00	UTAH 25-253	Gas Well	P	25	15	S	9	E
43-007-30402-00-00	UTAH 25-254	Gas Well	P	25	15	S	9	E
43-007-30600-00-00	UTAH 25-389	Gas Well	P	25	14	S	8	E
43-007-30599-00-00	UTAH 25-390	Gas Well	P	25	14	S	8	E
43-007-30658-00-00	UTAH 25-391	Gas Well	P	25	14	S	8	E
43-007-30602-00-00	UTAH 25-392	Gas Well	P	25	14	S	8	E
43-007-30206-00-00	UTAH 25-4-33	Gas Well	P	25	14	S	9	E
43-015-30519-00-00	UTAH 25-577	Gas Well	P	25	16	S	8	E
43-007-30156-00-00	UTAH 25-7-6	Gas Well	P	25	14	S	9	E
43-007-30204-00-00	UTAH 26-11-25	Gas Well	P	26	14	S	9	E
43-007-30205-00-00	UTAH 26-1-23	Gas Well	P	26	14	S	9	E
43-007-30181-00-00	UTAH 26-16-8	Gas Well	P	26	14	S	9	E
43-007-30446-00-00	UTAH 26-255	Gas Well	P	26	15	S	9	E
43-007-30445-00-00	UTAH 26-256	Gas Well	P	26	15	S	9	E
43-007-30444-00-00	UTAH 26-257	Gas Well	P	26	15	S	9	E
43-007-30514-00-00	UTAH 26-267	Gas Well	P	26	15	S	9	E
43-015-30541-00-00	UTAH 26-580	Gas Well	P	26	16	S	8	E
43-015-30542-00-00	UTAH 26-581	Gas Well	P	26	16	S	8	E
43-015-30544-00-00	UTAH 26-583	Gas Well	P	26	16	S	8	E
43-007-30202-00-00	UTAH 26-6-24	Gas Well	P	26	14	S	9	E
43-007-30395-00-00	UTAH 27-187	Gas Well	P	27	14	S	9	E
43-007-30292-00-00	UTAH 27-188	Gas Well	P	27	14	S	9	E
43-007-30457-00-00	UTAH 27-268	Gas Well	P	27	15	S	9	E
43-007-30458-00-00	UTAH 27-269	Gas Well	P	27	15	S	9	E
43-007-30712-00-00	UTAH 27-457	Gas Well	P	27	14	S	8	E
43-007-30714-00-00	UTAH 27-458	Gas Well	P	27	14	S	8	E
43-007-30777-00-00	UTAH 27-520	Gas Well	P	27	14	S	8	E
43-015-30545-00-00	UTAH 27-584	Gas Well	P	27	16	S	8	E
43-007-30193-00-00	UTAH 27-8-29	Gas Well	P	27	14	S	9	E
43-007-30186-00-00	UTAH 27-9-30	Gas Well	P	27	14	S	9	E
43-007-30396-00-00	UTAH 28-189	Gas Well	P	28	14	S	9	E
43-007-30397-00-00	UTAH 28-190	Gas Well	P	28	14	S	9	E
43-007-30293-00-00	UTAH 28-191	Gas Well	P	28	14	S	9	E
43-007-30294-00-00	UTAH 28-192	Gas Well	P	28	14	S	9	E
43-007-30551-00-00	UTAH 28-320	Gas Well	P	28	15	S	9	E
43-007-30560-00-00	UTAH 28-321	Gas Well	P	28	15	S	9	E
43-007-30405-00-00	UTAH 29-193	Gas Well	P	29	14	S	9	E
43-007-30427-00-00	UTAH 29-194	Gas Well	P	29	14	S	9	E
43-007-30739-00-00	UTAH 29-339	Gas Well	P	29	15	S	9	E
43-007-30740-00-00	UTAH 29-340	Gas Well	P	29	15	S	9	E
43-007-30741-00-00	UTAH 29-341	Gas Well	P	29	15	S	9	E
43-007-30742-00-00	UTAH 29-342	Gas Well	P	29	15	S	9	E
43-007-30262-00-00	UTAH 30-125	Gas Well	P	30	14	S	10	E
43-007-30185-00-00	UTAH 30-13-14	Gas Well	P	30	14	S	10	E
43-007-30265-00-00	UTAH 30-195	Gas Well	P	30	14	S	9	E
43-007-30344-00-00	UTAH 30-196	Gas Well	P	30	14	S	9	E

Utah Well List as of 12/26/02

API Well Number	Well Name	Well Type	Well Status	Sec	Twpn	Twpd	Rngn	Rngd
43-007-30178-00-00	UTAH 36-1-2	Gas Well	P	36	14	S	9	E
43-007-30341-00-00	UTAH 36-135	Gas Well	P	36	15	S	9	E
43-007-30343-00-00	UTAH 36-136	Gas Well	P	36	15	S	9	E
43-007-30342-00-00	UTAH 36-137	Gas Well	P	36	15	S	9	E
43-007-30315-00-00	UTAH 36-162	Gas Well	P	36	14	S	8	E
43-007-30316-00-00	UTAH 36-163	Gas Well	P	36	14	S	8	E
43-007-30317-00-00	UTAH 36-164	Gas Well	P	36	14	S	8	E
43-007-30318-00-00	UTAH 36-165	Gas Well	P	36	14	S	8	E
43-007-30144-00-00	UTAH 36-9-5	Gas Well	P	36	14	S	9	E
43-015-30341-00-00	UTAH 4-280	Gas Well	P	4	16	S	9	E
43-015-30342-00-00	UTAH 4-282	Gas Well	P	4	16	S	9	E
43-007-30384-00-00	UTAH 5-205	Gas Well	P	5	15	S	9	E
43-007-30269-00-00	UTAH 5-94	Gas Well	P	5	15	S	10	E
43-007-30270-00-00	UTAH 5-95	Gas Well	P	5	15	S	10	E
43-007-30271-00-00	UTAH 5-96	Gas Well	P	5	15	S	10	E
43-007-30217-00-00	UTAH 6-38	Gas Well	P	6	15	S	10	E
43-007-30218-00-00	UTAH 6-39	Gas Well	P	6	15	S	10	E
43-007-30219-00-00	UTAH 6-40	Gas Well	P	6	15	S	10	E
43-007-30254-00-00	UTAH 6-41	Gas Well	P	6	15	S	10	E
43-007-30235-00-00	UTAH 7-57	Gas Well	P	7	15	S	10	E
43-007-30236-00-00	UTAH 7-58	Gas Well	P	7	15	S	10	E
43-007-30237-00-00	UTAH 7-59	Gas Well	P	7	15	S	10	E
43-007-30238-00-00	UTAH 7-60	Gas Well	P	7	15	S	10	E
43-007-30275-00-00	UTAH 8-100	Gas Well	P	8	15	S	10	E
43-007-30410-00-00	UTAH 8-230	Gas Well	P	8	15	S	9	E
43-007-30272-00-00	UTAH 8-97	Gas Well	P	8	15	S	10	E
43-007-30285-00-00	UTAH 8-98X	Gas Well	P	8	15	S	10	E
43-007-30274-00-00	UTAH 8-99	Gas Well	P	8	15	S	10	E
43-007-30413-00-00	UTAH 9-228	Gas Well	P	9	15	S	9	E
43-007-30414-00-00	UTAH 9-229	Gas Well	P	9	15	S	9	E
43-007-30279-00-00	WILLIAMS 30-78	Gas Well	P	30	14	S	10	E
43-007-30481-00-00	WOOLSTENHULME 05-266	Gas Well	P	5	15	S	10	E
43-015-30250-00-00	UTAH 16-110	Gas Well	Shut In	16	16	S	9	E



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Eastern States Office
7450 Boston Boulevard
Springfield, Virginia 22153

IN REPLY REFER TO
3106.8(932.34)WF

January 16, 2003

NOTICE

ConocoPhillips Company	:	Oil & Gas Leases
P.O. Box 7500	:	
Bartlesville, Oklahoma 74005	:	

Merger/Name Change Recognized

Acceptable evidence was received in this office on January 14, 2003, concerning the change of name of Phillips Petroleum Company to **ConocoPhillips Company** and the merger of **Conoco Incorporated** into **ConocoPhillips Company** on Federal oil and gas leases, with **ConocoPhillips Company** being the surviving entity.

The Secretary of the State of Delaware certified the effective date of this merger effective December 31, 2002.

The oil and gas lease files identified on the enclosed exhibit have been noted to the merger. The exhibit was compiled from a list of leases obtained from your list of leases. Eastern States has not abstracted the lease files to determine if the entities affected by this merger hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested record title or operating rights interest. We are notifying the Minerals Management Service and all applicable Bureau of Land Management offices of this merger and name change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify other leases in which the merging entity maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

By Operation of law the name of the principal on Nationwide Oil and Gas Bond held by Conoco Incorporated (ES0085) has been changed to ConocoPhillips Company.

If you have any questions, please contact Bill Forbes at 703-440-1536.

S/W. Bert B. Forbes

Wilbert B. Forbes
Land Law Examiner
Branch of Use Authorization
Division of Resources Planning, Use
and Protection

bc: JFO, BLM State Offices, MMS, ES RF, 930 RF, ES-932:
Bforbes:wbf:01/16/03:440-1536/ConocoPhillips Co

ORIGINAL

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells. Use APPLICATION FOR PERMIT TO DRILL OR DEEPEN form for such proposals.

1. Type of Well: OIL GAS OTHER:

2. Name of Operator: Phillips Petroleum Company

3. Address and Telephone Number: 6825 South 5300 West, P.O. Box 851, Price, UT 84501 (435) 613-9777

4. Location of Well Footages: 704' FNL, 975' FEL
 QQ, Sec., T., R., M.: NE /NE SEC. 27, T16S, R08E, SLB & M

5. Lease Designation and Serial Number: ML-48215
 6. If Indian, Allottee or Tribe Name: N/A
 7. Unit Agreement Name: N/A
 8. Well Name and Number: Utah 27-584
 9. API Well Number: 43-015-30545
 10. Field or Pool, or Wildcat: Drunkards Wash

County: Emery County
 State: Utah

CONFIDENTIAL

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

NOTICE OF INTENT
(Submit in Duplicate)

- Abandon
 - Repair Casing
 - Change of Plans
 - Convert to Injection
 - Fracture Treat or Acidize
 - Multiple Completion
 - Other _____
- Approximate date work will start _____
- New Construction
 - Pull or Alter Csg
 - Recomplete
 - Reperforate
 - Vent or Flare
 - Water Shut-Off

SUBSEQUENT REPORT
(Submit Original Form Only)

- Abandon *
 - Repair Casing
 - Change of Plans
 - Convert to Injection
 - Fracture Treat or Acidize
 - Other Chemical/Flush Treatment
- Date of work completion 01/22/03
- New Construction
 - Pull or Alter Csg
 - Reperforate
 - Vent or Flare
 - Water Shut-Off

Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION REPORT AND LOG form.
 * Must be accompanied by a cement verification report.

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Please be advised that the above referenced well was chemically treated with 4000 gallons of low Ph fluid & 200 gallons of 4% HCL on 01/22/03.

RECEIVED

FEB 04 2003

DIV. OF OIL, GAS & MINING

13.

Name & Signature: Lynnette Allred  Title: Administrative Assistant Date: 01/31/03

(This space for state use only)

OPERATOR CHANGE WORKSHEET

ROUTING

1. GLH
2. CDW
3. FILE

Change of Operator (Well Sold)

Designation of Agent/Operator

Operator Name Change

X Merger

The operator of the well(s) listed below has changed, effective: **12-31-02**

FROM: (Old Operator):	TO: (New Operator):
PHILLIPS PETROLEUM COMPANY	CONOCOPHILLIPS COMPANY
Address: 980 PLAZA OFFICE	Address: P O BOX 2197, WL3 4066
BARTLESVILLE, OK 74004	HOUSTON, TX 77252
Phone: 1-(918)-661-4415	Phone: 1-(832)-486-2329
Account No. N1475	Account No. N2335

CA No. Unit: DRUNKARDS WASH

WELL(S)

NAME	SEC TWN RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
UTAH 23-564	23-16S-08E	43-015-30335	11256	STATE	GW	P
UTAH 23-567	23-16S-08E	43-015-30513	11256	STATE	GW	P
UTAH 23-566	23-16S-08E	43-015-30517	11256	STATE	GW	P
UTAH 23-565	23-16S-08E	43-015-30538	11256	STATE	GW	DRL
UTAH 24-560	24-16S-08E	43-015-30514	11256	STATE	GW	P
UTAH 24-561	24-16S-08E	43-015-30491	11256	STATE	GW	P
UTAH 24-563	24-16S-08E	43-015-30516	11256	STATE	GW	P
UTAH 25-577	25-16S-08E	43-015-30519	11256	STATE	GW	P
UTAH 26-580	26-16S-08E	43-015-30541	11256	STATE	GW	P
UTAH 26-581	26-16S-08E	43-015-30542	11256	STATE	GW	P
UTAH 26-583	26-16S-08E	43-015-30544	11256	STATE	GW	P
UTAH 27-584	27-16S-08E	43-015-30545	11256	STATE	GW	P
USA 01-264	01-16S-09E	43-015-30336	11256	FEDERAL	GW	P
USA 01-265	01-16S-09E	43-015-30337	11256	FEDERAL	GW	P
USA 01-312	01-16S-09E	43-015-30350	11256	FEDERAL	GW	P
USA 1-425	01-16S-09E	43-015-30418	11256	FEDERAL	GW	P
UTAH 02-138	02-16S-09E	43-015-30288	11256	STATE	GW	P
UTAH 02-139	02-16S-09E	43-015-30289	11256	STATE	GW	P
UTAH 02-140	02-16S-09E	43-015-30290	11256	STATE	GW	P
UTAH 02-141	02-16S-09E	43-015-30291	11256	STATE	GW	P

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 01/08/2003
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 01/08/2003
- The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 02/03/2003
- Is the new operator registered in the State of Utah: YES Business Number: 562960-0143
- If **NO**, the operator was contacted contacted on: _____

6. (R649-9-2)Waste Management Plan has been received on: IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: 01/14/2003

8. **Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 01/14/2003

9. **Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: 01/14/2003

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

DATA ENTRY:

1. Changes entered in the **Oil and Gas Database** on: 02/11/2003
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 02/11/2003
3. Bond information entered in RBDMS on: N/A
4. Fee wells attached to bond in RBDMS on: N/A

STATE WELL(S) BOND VERIFICATION:

1. State well(s) covered by Bond Number: 8140-60-24

FEDERAL WELL(S) BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: 8015-16-69

INDIAN WELL(S) BOND VERIFICATION:

1. Indian well(s) covered by Bond Number: N/A

FEE WELL(S) BOND VERIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number 6196922
2. The **FORMER** operator has requested a release of liability from their bond on: N/A
The Division sent response by letter on: N/A

LEASE INTEREST OWNER NOTIFICATION:

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: N/A

COMMENTS:
