

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK
 DRILL DEEPEN PLUG BACK

b. TYPE OF WELL
 OIL WELL GAS WELL OTHER SINGLE ZONE MULTIPLE ZONE

2. NAME OF OPERATOR
Coastal Oil & Gas Corporation

3. ADDRESS OF OPERATOR
P.O. Box 749; Denver, Colorado 80201-0749

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)*
 At surface
767' FSL, 526' FWL (SW $\frac{1}{4}$ SW $\frac{1}{4}$) Section 5, T10S, R21E
 At proposed prod. zone
Same as Above

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*
Approximately twelve (12) miles southeast of Ouray, Utah

15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drig. unit line, if any)
526'

16. NO. OF ACRES IN LEASE
562.50

17. NO. OF ACRES ASSIGNED TO THIS WELL
80

18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT.
1,400'±

19. PROPOSED DEPTH
6,050' *WSTC*

20. ROTARY OR CABLE TOOLS
Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)
5046' GR

22. APPROX. DATE WORK WILL START*
February 25, 1991

5. LEASE DESIGNATION AND SERIAL NO.
UTU-01303D

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
Not Applicable

7. UNIT AGREEMENT NAME
Natural Buttes

8. FARM OR LEASE NAME
NBU

9. WELL NO.
114

10. FIELD AND POOL, OR WILDCAT
Natural Buttes (b30)

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Section 5, T10S, R21E

12. COUNTY OR PARISH
Uintah

13. STATE
Utah

23. PROPOSED CASING AND CEMENTING PROGRAM (ALL NEW)

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12-1/4"	8-5/8" K-55	24.0#	0- 250'	180 sx, Circulated to Surface*
7-7/8"	5-1/2" K-55	17.0#	0-6,050'	545 sx, Circulated to Surface*

* Cement volumes may change due to hole size. Calculate from caliper log.

RECEIVED
DEC 17 1990

EIGHT-POINT RESOURCE PROTECTION PLAN ATTACHED

DIVISION OF
OIL, GAS & MINING

I hereby certify that Coastal Oil & Gas Corporation is authorized by the proper Lease Interest Owners to conduct lease operations associated with this Application for Permit to Drill the NBU #114, Federal Lease #UTU-01303D. Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by Coastal Oil & Gas Corporation, Nationwide Bond #CO-0018, who will be responsible for compliance with all the terms and conditions of that portion of the lease associated with this Application.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

SIGNED Randy D. Bartley TITLE Manager, Drilling & Prod. DATE 12/10/90

(This space for Federal or State office use)

PERMIT NO. 43-047-31903 APPROVAL DATE _____

APPROVED BY _____ TITLE _____ DATE: 12-27-90

CONDITIONS OF APPROVAL, IF ANY: _____ BY: JAT

WELL SPACING: 65-3-2

*See Instructions On Reverse Side


T10S, R21E, S.L.B.&M.

COASTAL OIL & GAS CORP.

Well location, NBU #114, located as shown in the SW 1/4 SW 1/4 of Section 5, T10S, R21E, S.L.B.&M. Uintah County, Utah.


BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MIN. SEIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

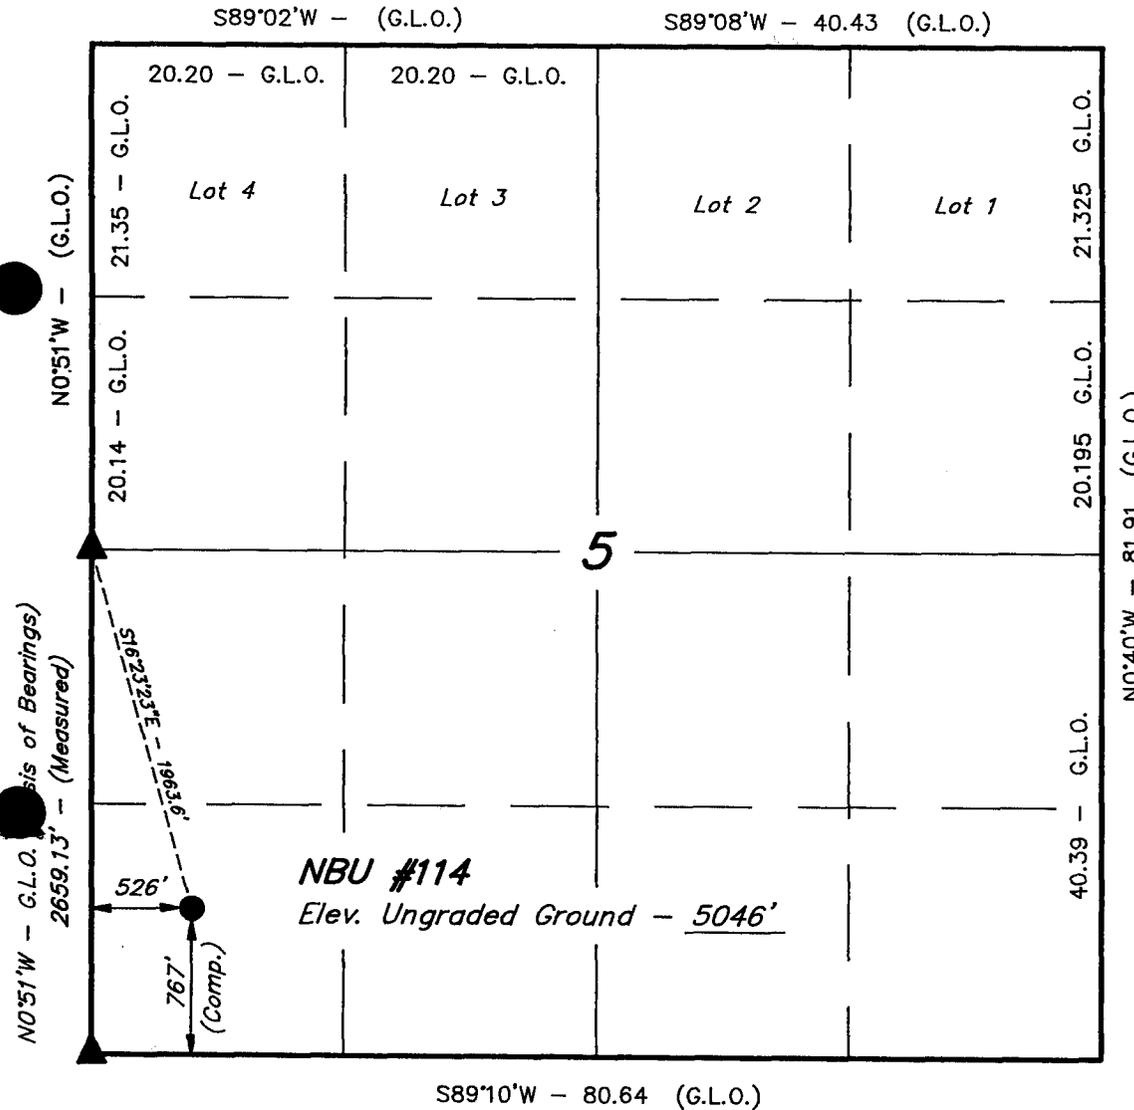

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



UINTAH ENGINEERING & LAND SURVEYING
 P. O. BOX 1758 - 85 SOUTH - 200 EAST
 VERNAL, UTAH - 84078

SCALE 1" = 1000'	DATE 9-30-90
PARTY D.A. R.D. T.D.H.	REFERENCES G.L.O. PLAT
WEATHER WARM	FILE COASTAL OIL & GAS CORP.

▲ = SECTION CORNERS LOCATED. (Brass Caps)

COASTAL OIL & GAS CORPORATION
Lease #UTU-01303D, NBU #114
SW $\frac{1}{4}$ SW $\frac{1}{4}$, Section 5, T10S, R21E
Uintah County, Utah

Drilling Prognosis

1. Estimated Tops of Important Geologic Markers:

Uinta	Surface	Wasatch	4695'
Green River	1413'	Total Depth	6050'

2. Estimated Depths of Anticipated Water, Oil, Gas or Mineral Formations:

Wasatch 4695' Gas (Primary Objective)

If any shallow water zones are encountered, they will be adequately protected and reported; none anticipated. All potentially productive hydrocarbon zones will be cemented off.

3. Pressure Control Equipment: (Schematic Attached)

A. Type: 11" Double Gate Hydraulic.

The Blow-Out Preventer will be equipped as follows:

1. One (1) blind ram (above).
2. One (1) pipe ram (below).
3. Kill line (2-inch minimum).
4. One (1) kill line valve (2-inch minimum).
5. One (1) choke line valve.
6. Two (2) adjustable chokes.
7. Upper kelly cock valve with handle available.
8. Safety valve & subs to fit all drill strings in use.
9. 2-inch (minimum) choke line.
10. Pressure gauge on choke manifold.

B. Pressure Rating: 2,000 psi

C. Testing Procedure:

At a minimum, the BOP, choke manifold, and related equipment will be pressure tested to the approved working pressure of the BOP stack (if isolated from the surface casing by a test plug) or to 70% of the internal yield strength of the surface casing (if the BOP is not isolated from the casing by a test plug). Pressure will be maintained for a period of at least ten (10) minutes or until the requirements of the test are met, whichever is longer.

3. Pressure Control Equipment:

C. Testing Procedure: Continued

At a minimum, the above pressure test will be performed:

1. When the BOP is initially installed;
2. Whenever any seal subject to test pressure is broken;
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition to the above, the pipe and blind rams will be activated each trip, but not more than once each day.

All BOP drills and tests will be recorded in the IADC driller's log.

D. Choke Manifold Equipment:

All choke lines will be straight lines unless turns use tee blocks or are targeted with running tees, and will be anchored to prevent whip and vibration.

E. Accumulator:

The accumulator will have sufficient capacity to close all BOP's and retain 200 psi above precharge. Nitrogen bottles which meet the manufacturer's specifications will be used as the backup to the required independent power source. The accumulator precharge pressure test will be conducted prior to connecting the closing unit to the BOP stack and at least once every six (6) months thereafter. The accumulator pressure will be corrected if the measured precharge pressure is found to be above or below the maximum or minimum limits specified in Onshore Operating Order #2.

F. Special Drilling Operations:

In addition to the equipment already specified in Items A through E, above, the following equipment will be in place and operational during air/gas drilling:

1. Properly lubricated and maintained rotating head.
2. Spark arresters on engines or water cooled exhaust.
3. Blooie line discharge 100 feet from well bore and securely anchored.

3. Pressure Control Equipment:

F. Special Drilling Operations: Continued

4. Straight run on blooie line.
5. Deduster equipment (not required on aerated water system).
6. All cuttings and circulating medium(s) shall be directed into a reserve or blooie pit.
7. Float valve above bit.
8. Automatic igniter or continuous pilot light on the blooie line (not required on aerated water system).
9. Compressors located in the opposite direction from the blooie line and at a minimum of 100 feet from the well bore.
10. Mud circulating equipment, water, and mud materials (does not have to be pre-mixed) sufficient to maintain the capacity of the hole and circulating tanks or pits.

G. Miscellaneous Information:

The Blow-Out Preventer and related pressure control equipment will be installed, tested and maintained in compliance with the specifications in and requirements of Onshore Operating Order #2.

The choke manifold and BOP extension rods with hand wheels will be located outside the rig sub-structure. The hydraulic BOP closing unit will be located at least twenty-five (25) feet from the well head but readily accessible to the driller.

Exact locations and configurations of the hydraulic BOP closing unit will depend upon the particular rig contracted to drill this hole.

A flare line will be installed after the choke manifold, extending 100 feet (minimum) from the center of the drill hole to a separate flare pit.

4. The Proposed Casing and Cementing Program: (All New)

A. Casing Program

<u>Hole Size</u>	<u>Casing Size</u>	<u>Wt./Ft.</u>	<u>Grade</u>	<u>Joint</u>	<u>Depth Set</u>
12-1/4"	8-5/8"	24.0#	K-55	ST&C	0- 250'

4. The Proposed Casing and Cementing Program:

A. Casing Program - Continued

<u>Hole Size</u>	<u>Casing Size</u>	<u>Wt./Ft.</u>	<u>Grade</u>	<u>Joint</u>	<u>Depth Set</u>
7-7/8"	5-1/2"	17.0#	K-55	LT&C	0-6050'

Casing string(s) will be pressure tested to 0.22 psi per foot, or 1500 psi (not to exceed 70% of the internal yield strength of the casing), whichever is greater, after cementing and prior to drilling out from under the casing shoe.

B. Cementing Program

Surface Casing : Cement with approximately 180 sx Class "G" cement + additives, circulated to surface with 100% excess.

Production Casing : Lead with approximately 350 sx Halliburton Silica "Lite" cement with 4% Gel, 4% CaCl₂, 0.3 % Halad-413 and 2.0#/sx Granulite TR; tail with approximately 195 sx Class "G" cement + additives. Cement will be circulated back to surface with 30% excess.

Actual cement volumes to be required will be determined from the caliper log.

All waiting on cement (WOC) times will be adequate to achieve a minimum of 500 psi compressive strength at the casing shoe prior to drilling out.

5. Mud Program: (Visual Monitoring)

<u>Interval</u>	<u>Type</u>	<u>Weight</u>	<u>Viscosity</u>	<u>Fluid Loss</u>
0-6050'	Aerated Water	-----	-----	-----

Sufficient quantities of mud materials will be maintained or readily accessible for the purpose of assuring well control during the course of drilling operations.

6. Evaluation Program:

Logs : DIL-Caliper : 6050' - Surface
FDC-CNL : 6050' - 1500'

DST's : None anticipated.

Cores : None anticipated.

The proposed evaluation program may change at the discretion of the wellsite geologist, with prior approval from the Authorized Officer, Bureau of Land Management.

Stimulation : No stimulation or frac treatment has been formulated for this test at this time. The drill site, as approved, will be of sufficient size to accommodate all completion activities.

Whether the well is completed as a dry hole or as a producer, Well Completion and Recompletion Report and Log (Form 3160-4) will be submitted to the Book Cliffs Resource Area Office not later than thirty (30) days after the completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164.

Two (2) copies of all logs, core descriptions, core analyses, well test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the Authorized Officer, Book Cliffs Resource Area Office, Bureau of Land Management, 170 South 500 East, Vernal, Utah 84078, Phone: (801) 789-1362.

7. Abnormal Conditions:

No abnormal temperatures or pressures are anticipated. No H₂S has been encountered in or known to exist from previous wells drilled to similar depths in the general area. Maximum anticipated bottom hole pressure equals approximately 2,813' psi (calculated at 0.465 psi/foot) and maximum anticipated surface pressure equals approximately 1,482 psi (bottom hole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. Anticipated Starting Dates and Notification of Operations:

A. Drilling Activity

Anticipated Commencement Date : February 25, 1991
Drilling Days : Approximately 10 Days
Completion Days : Approximately 7 days

B. Notification of Operations

The Book Cliffs Resource Area Office, Bureau of Land Management will be notified at least twenty-four (24) hours PRIOR to the commencement of the following activities:

1. Spudding of the well. This oral report will be followed up with a Sundry Notice (Form 3160-5);
2. initiating pressure tests of the blow-out preventer and related equipment;
3. running casing and cementing of ALL casing strings.

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in suspended status without prior approval of the Authorized Officer. If operations are to be suspended, prior approval of the Authorized Officer will be obtained and notification given before resumption of operations.

In accordance with Onshore Operating Order #1, this well will be reported on MMS Form 3160-6, "Monthly Report of Operations", starting with the month in which operations commence and continuing each month until the well is physically plugged and abandoned. This report will be filed directly with the Royalty Management Program, Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217.

Immediate Report: spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the provisions of NTL-3A or its current revision.

8. Anticipated Starting Dates and Notification of Operations:

B. Notification of Operations - Continued

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed for prior approval of the Authorized Officer, and all conditions of this approved plan will be applicable during all operations conducted with the replacement rig.

Should the well be successfully completed for production, the Authorized Officer will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communication no later than five (5) business days following the date on which the well is placed on production.

Pursuant to NTL-2B, with the approval of the Authorized Officer, produced water may be temporarily disposed of into the reserve pit for a period of up to ninety (90) days. During this period so authorized, an application for approval of the permanent disposal method, along with the required water analysis and other information, must be submitted to the Authorized Officer.

Pursuant to NTL-4A, lessees and operators are authorized to vent/flare gas during initial well evaluation tests, not exceeding a period of thirty (30) days or the production of fifty (50) MMCF of gas, whichever occurs first. An application must be filed with the Authorized Officer, and approval received, for any venting/flaring of gas beyond the initial thirty (30) day or otherwise authorized test period.

A schematic facilities diagram as required by 43 CFR 3162.7-2, 3162.7-3, and 3162.7-4 shall be submitted to the Vernal District Office within thirty (30) days of installation or first production, whichever occurs first. All site security regulations as specified in 43 CFR 3162.7 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-4.

A first production conference will be scheduled within fifteen (15) days after receipt of the first production notice.

8. Anticipated Starting Dates and Notification of Operations:

B. Notification of Operations - Continued

No well abandonment operations will be commenced without the prior approval of the Authorized Officer. In the case of newly-drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the Authorized Officer.



A "Notice of Intention to Abandon" (Form 3160-5) will be filed with the Authorized Officer within fifteen (15) days following the granting of oral approval to plug and abandon.

Upon completion of approved plugging, a regulation marker will be erected in accordance with 43 CFR 3162.6. The following information will be permanently placed on the marker with a plate, cap, or beaded-on with a welding torch: "Fed" or "Ind", as applicable; Company Name, Well Name and Number, Location by Quarter/Quarter, Section, Township, Range, and Federal or Indian Lease Number.

A "Subsequent Report of Abandonment" (Form 3160-5) will be submitted within thirty (30) days following the actual plugging of the well bore. This report will indicate where plugs were placed and the current status of surface restoration operations. If surface restoration has not been completed at that time, a follow-up report on Form 3160-5 will be filed when all surface restoration work has been completed and the location is considered ready for final inspection. Final abandonment will not be approved until the surface reclamation work required by the approved Application for Permit to Drill has been completed to the satisfaction of the Authorized Officer or his representative, or the appropriate Surface Management Agency.

Pursuant to Onshore Operating Order #1, lessees and operators have the responsibility to see that their exploration, development, production, and construction operations are conducted in such a manner which conforms with applicable Federal laws and regulations and with State and local laws and regulations to the extent that such State and local laws are applicable to operations on Federal and Indian lands.

BOP STACK

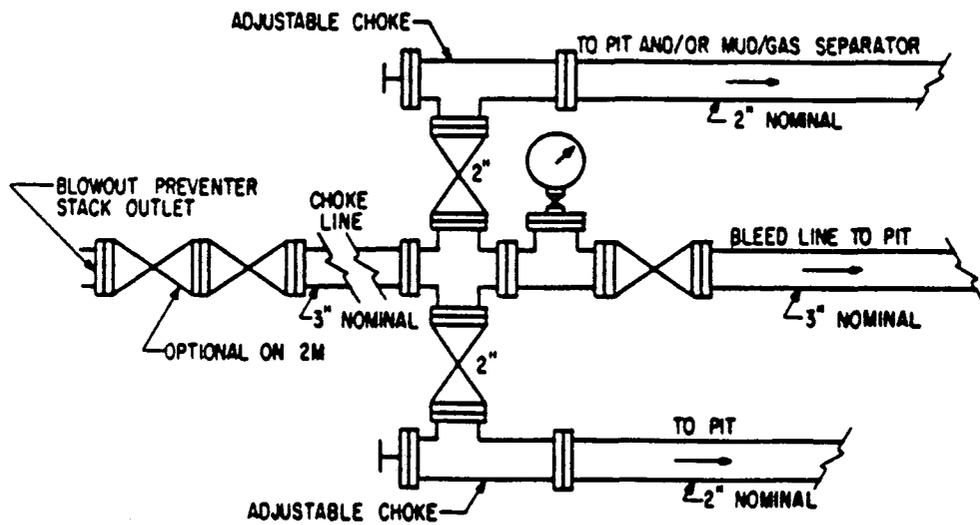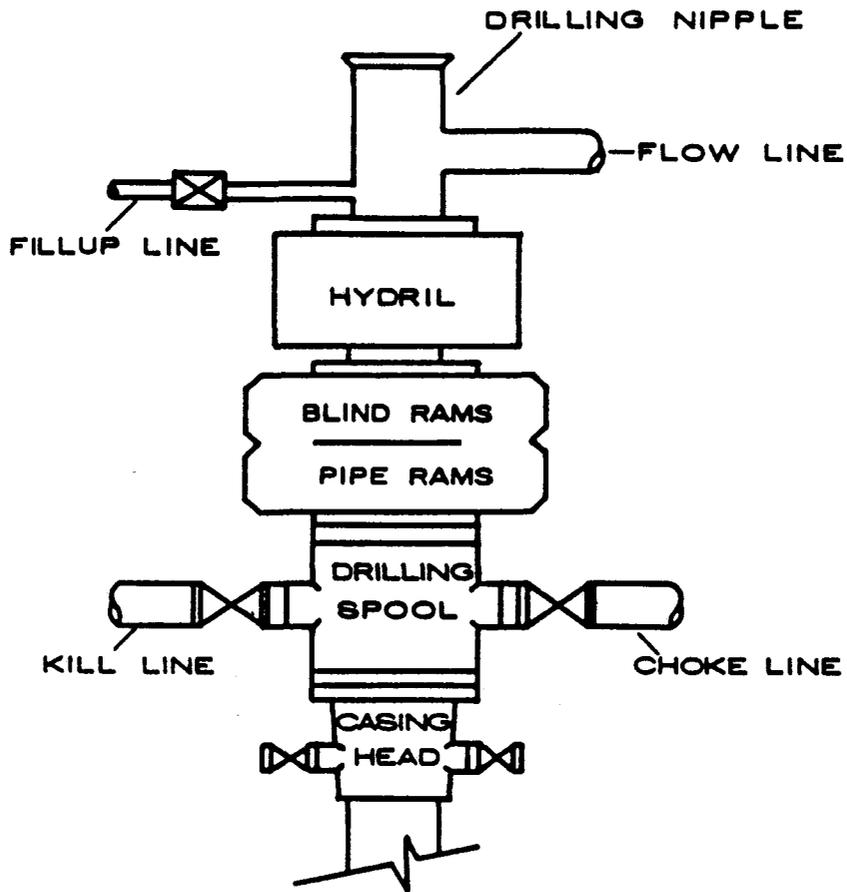

COASTAL OIL & GAS CORPORATION
Lease #UTU-01303D, NBU #114
SW $\frac{1}{4}$ SW $\frac{1}{4}$, Section 5, T10S, R21E
Uintah County, Utah

Multi-Point Surface Use and Operations Plan

1. Existing Roads: Refer to Maps "A" & "B" (shown in ORANGE)
 - A. The proposed well site is staked and four 200-foot reference stakes are present.
 - B. To reach the location from the town of Vernal, Utah; proceed generally southwest approximately 14.0 miles on U.S. Highway 40 (a paved U.S. highway), thence generally south approximately 10.0 miles on Utah Highway 88 (a paved state highway) to the town of Ouray, thence generally south approximately 6.9 miles on the Seep Ridge Road (an existing, upgraded Uintah County road), thence generally east approximately 3.8 miles on an existing, upgraded oilfield road (crowned & ditched with a gravel surface), thence generally south/southeast approximately 1.6 miles on an existing, upgraded oilfield road (crowned & ditched with a gravel surface), thence generally east approximately 500 feet to the proposed NBU #114 well location.
 - C. Access roads - refer to Maps "A" and "B".
 - D. Access roads within a one-mile radius - refer to Map "B".
 - E. The existing gravel roads will be maintained in the same or better condition as existed prior to the commencement of operations and said maintenance will continue until final abandonment and reclamation of the NBU #114 well location.

2. Planned Access Roads: Refer to Map "B" (Shown in GREEN)

Approximately 500 feet of new road construction will be required for access to the proposed NBU #114 well location.

- A. Width - maximum 30-foot overall right-of-way with an 18-foot road running surface, crowned & ditched.
- B. Construction standard - the access road will be constructed in accordance with Bureau of Land Management Rooding Guidelines established for oil and gas exploration and development activities as referenced in the BLM/USFS publication: Surface Operating Standards for Oil and Gas Exploration and Development, Third Edition.

The access road will be constructed to meet the standards of the anticipated traffic flow and all-weather requirements.

2. Planned Access Roads: Continued

- B. Construction standard - construction will include ditching, draining, graveling, crowning, and capping the roadbed as necessary to provide a well constructed and safe road.

Prior to construction/upgrading, the roadway shall be cleared of any snow cover and allowed to dry completely.

Traveling off of the thirty (30) foot right-of-way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or the accumulation of debris in the drainage crossing nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at a frequent intervals by means of cutouts.

Upgrading shall not be allowed during muddy conditions.

Should mud holes develop, they shall be filled in and detours around them avoided.

- C. Maximum grade - 5%.
- D. Turnouts - turnouts will be constructed along the access route as necessary or required to allow for the safe passage of traffic. None anticipated at this time.
- E. Drainage design - the access road will be crowned, ditched, and water turnouts installed as necessary to provide for proper drainage along the access road route.
- F. Culverts, cuts and fills - no culverts will be required. There are no major cuts and/or fills on/along the proposed access road route.
- G. Surface materials - any construction materials which may be required for surfacing of the access road will be purchased from a local contractor having a permitted source of materials in the area, if required by the Authorized Officer, Bureau of Land Management. None anticipated at this time.
- H. Gates, cattleguards or fence cuts - none required.

2. Planned Access Roads: Continued

- I. Road maintenance - during both the drilling and production phase of operations, the road surface and shoulders will be kept in a safe and useable condition and will be maintained in accordance with the original construction standards. All drainage ditches and culverts will be kept clear and free-flowing, and will also be maintained in accordance with the original construction standards. The access road right-of-way will be kept free of trash during operations.
- J. The proposed access road is flagged.

3. Location of Existing Wells Within a One-Mile Radius:

Please Refer to Map "C"

- A. Water wells - none known.
- B. Abandoned wells - none known.
- C. Temporarily abandoned wells - none known.
- D. Disposal wells - none known.
- E. Drilling wells - none known.
- F. Producing wells - NE $\frac{1}{4}$ NW $\frac{1}{4}$, Section 5, T10S, R21E.
SE $\frac{1}{4}$ SW $\frac{1}{4}$, Section 5, T10S, R21E.
SE $\frac{1}{4}$ SE $\frac{1}{4}$, Section 5, T10S, R21E.
SE $\frac{1}{4}$ SE $\frac{1}{4}$, Section 6, T10S, R21E.
SE $\frac{1}{4}$ NW $\frac{1}{4}$, Section 7, T10S, R21E.
SW $\frac{1}{4}$ NE $\frac{1}{4}$, Section 7, T10S, R21E.
NE $\frac{1}{4}$ SE $\frac{1}{4}$, Section 7, T10S, R21E.
NE $\frac{1}{4}$ NW $\frac{1}{4}$, Section 8, T10S, R21E.
SW $\frac{1}{4}$ NW $\frac{1}{4}$, Section 8, T10S, R21E.
NW $\frac{1}{4}$ SW $\frac{1}{4}$, Section 8, T10S, R21E.
SE $\frac{1}{4}$ NE $\frac{1}{4}$, Section 8, T10S, R21E.
- G. Shut-in wells - none known.
- H. Injection wells - none known.
- I. Monitoring wells - none known.

4. Location of Existing and/or Proposed Facilities Owned by Coastal Oil & Gas Corporation Within a One-Mile Radius:

A. Existing

- 1. Tank batteries - NE $\frac{1}{4}$ NW $\frac{1}{4}$, Section 5, T10S, R21E.
SE $\frac{1}{4}$ SW $\frac{1}{4}$, Section 5, T10S, R21E.
SW $\frac{1}{4}$ NE $\frac{1}{4}$, Section 7, T10S, R21E.
NE $\frac{1}{4}$ SE $\frac{1}{4}$, Section 7, T10S, R21E.
NE $\frac{1}{4}$ NW $\frac{1}{4}$, Section 8, T10S, R21E.
SW $\frac{1}{4}$ NW $\frac{1}{4}$, Section 8, T10S, R21E.

4. Location of Existing and/or Proposed Facilities Owned by Coastal Oil & Gas Corporation Within a One-Mile Radius:

A. Existing - Continued

1. Tank batteries - SE $\frac{1}{4}$ NE $\frac{1}{4}$, Section 8, T10S, R21E.
2. Production facilities - same as Item #4A1, above.
3. Oil gathering lines - none.
4. Gas gathering lines - same as Item #4A1, above.

B. New Facilities Contemplated

1. All production facilities will be located on the disturbed portion of the well pad and at a minimum of twenty-five (25) feet from the toe of the back-slope or toe of the fill slope.
2. The production facilities (consisting primarily of a christmas tree at the well head, dehydration unit, and emergency pit) will require an area approximately 300' X 135'. A diagram showing the proposed production facility layout will be submitted to the Authorized Officer via "Sundry Notice" (Form 3160-5) for approval of subsequent installation operations.
3. Production facilities will be accommodated on the existing well pad. Construction materials required for installation of the production facilities will be obtained from the site; any additional materials required will be purchased from a local supplier having a permitted (private) source of materials within the area.

A dike will be constructed completely around those production facilities which contain fluids (i.e. production tanks, produced water tanks and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

4. All permanent (on-site for six months or longer) above-the-ground structures constructed or installed including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Five (5) State Rocky Mountain Interagency Committee.

All production facilities will be painted within six (6) months of installation.

4. Location of Existing and/or Proposed Facilities Owned by Coastal Oil & Gas Corporation Within a One-Mile Radius:

B. New Facilities Contemplated - Continued

4. Facilities required to comply with Occupational Health and Safety Act Rules and Regulations will be excluded from this painting requirement.

The required paint color is Carlsbad Canyon, Munsell standard color number 2.5Y 6/2.

5. If at any time the facilities located on public lands and authorized by the terms of the lease are no longer included in the lease (due to a contraction in the unit or other lease or unit boundary change), the Bureau of Land Management will process a change in authorization to the appropriate statute). The authorization will be subject to the appropriate rental or other financial obligation as determined by the Authorized Officer.

- C. The production (emergency) pit will be fenced with woven wire mesh topped with one (1) strand of barbed wire held in place with metal side posts and wooden corner "H" braces in order to protect livestock and wildlife. Please refer to Item #9E (page #'s 8 & 9) for additional information on the fencing specifications.

- D. During drilling and subsequent operations, all equipment and vehicles will be confined to the access road right-of-way and any additional areas as specified in the approved Application for Permit to Drill.

- E. Reclamation of disturbed areas no longer needed for operations will be accomplished by grading, leveling and seeding as recommended by the Bureau of Land Management (Refer to Item #10A2 (page #10) for the appropriate seed mixture and rate of application).

5. Location and Type of Water Supply:

- A. Fresh water for drilling will be obtained from an existing water well and reservoir: Uintah #1, owned by Target Trucking, Inc. and located in the SE $\frac{1}{4}$ SE $\frac{1}{4}$ NE $\frac{1}{4}$ of Section 16, Township 10 South, Range 21 East, Uintah County, Utah; permit #49-991 (A57530).

5. Location and Type of Water Supply: Continued

- B. Water will be transported over existing roads via tank truck from the point of diversion to the proposed NBU #114 well location. No new construction will be required on/along the proposed water haul route. No off-lease/unit Federal lands will be crossed on/along the proposed water haul route.
- C. No water well will be drilled on this location.

6. Source of Construction Materials:

- A. Construction materials needed for surfacing of the well pad will be obtained from a local contractor having a permitted source (private) of materials in the area. Refer to Item #2F (page #2) regarding any construction materials which may be required on the access road.
- B. No construction materials will be taken from Federal and/or Indian lands without prior approval from the appropriate Surface Management Agency.
- C. If production is established, any additional construction materials needed for surfacing the access road and installation of production facilities will be purchased from a local supplier having a permitted (private) source of materials in the area.
- D. No new access roads for construction materials will be required.

7. Methods of Handling Waste Materials:

- A. Cuttings - the cuttings will be deposited in the reserve/blooiie pit.
- B. Drilling fluids - including salts and chemicals will be contained in the reserve/blooiie pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within ninety (90) days after termination of drilling and completion activities.

In the event adverse weather conditions prevent removal of the fluids from the reserve pit within this time period, an extension may be granted by the Authorized Officer upon receipt of a written request from Coastal Oil & Gas Corporation.

The reserve pit will be constructed so as not to leak, break, or allow discharge.

7. Methods of Handling Waste Materials: Continued

- C. Produced fluids - liquid hydrocarbons produced during completion operations will be placed in test tanks on the location. Produced produced waste water will be confined to a lined pit (reserve pit) or storage tank for a period not to exceed ninety (90) days after initial production. During the ninety (90) day period, in accordance with NTL-2B, an application for approval of a permanent disposal method and location, along with the required water analysis, shall be submitted for the Authorized Officer's approval. Failure to file an application within the time frame allowed will be considered an incidence of noncompliance.

Any spills of oil, gas, salt water or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

- D. Sewage - self-contained, chemical toilets will be provided by Rocket Sanitation for human waste disposal. Upon completion of operations, or as needed, the toilet holding tanks will be pumped as and the contents disposed of in the nearest, approved, sewage disposal facility.
- E. Garbage and other waste material - garbage, trash and other waste materials will be collected in a portable, self-contained and fully-enclosed trash cage during drilling and completion operations. Upon completion of operations (or as needed) the accumulated trash will be disposed of at an authorized sanitary landfill. No trash will be burned on location or placed in the reserve pit.
- F. Immediately after removal of the drilling rig, all debris and other waste materials not contained in the trash cage will be cleaned up and removed from the well location. No adverse materials will be left on the location upon the termination of drilling and completion operations. Any open pits will be fenced during the drilling operation and the fencing will be maintained until such time as the pits are backfilled.

8. Ancillary Facilities:

None anticipated.

9. Wellsite Layout:

- A. Figure #1 shows the drill site layout as staked. Cross sections have been drafted to visualize the planned cuts and fills across the location. A minimum of six (6) inches of topsoil will be stripped from the location (including areas of cut, fill, and/or subsoil storage) and stockpiled for future reclamation of the well site. Refer to Figure #1 for the location of the topsoil and subsoil stockpiles.
- B. Figure #1 is a diagram showing the rig layout. No permanent living facilities are planned. There will be one (1) trailer on location during drilling operations for the toolpusher.
- C. A diagram showing the proposed production facility layout will be submitted to the Authorized Officer via Sundry Notice (Form 3160-5) for approval of subsequent operations (Refer to Item #4B (page #4) for additional information in this regard).
- D. If porous subsoil materials (gravel, scoria, sand, faulted rock structures, etc.) are encountered during reserve pit construction, an impervious liner will be installed in order to prevent drilling water loss through seepage. We do not anticipate the need for a pit liner at this time.
- E. Prior to the commencement of drilling operations, the reserve pit will be fenced "sheep tight" on three (3) sides according to the following minimum standards:
 1. 30-inch net wire shall be used with at least one (1) strand of barbed wire on top of the net wire (barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
 2. The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least 42 inches.
 3. Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.
 4. Standard steel, wood, or pipe posts shall be used between the corner braces. maximum distance between any two (2) posts shall be no greater than sixteen (16) feet.

9. Wellsite Layout: Continued

E. Prior to the commencement of drilling operations, the reserve pit will be fenced "sheep tight" on three (3) sides according to the following minimum standards:

5. All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The fourth side of the reserve pit will be fenced immediately upon removal of the drilling rig and the fencing will be maintained until the pit is backfilled.

F. Any hydrocarbons on the pit will be removed from the pit as soon as possible after drilling operations are completed.

10. Plans for Reclamation of the Surface:

A. Production

1. Immediately upon well completion, the well location and surrounding area(s) will be cleared of all debris, materials, trash and junk not required for production.
2. Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with 43 CFR 3162.7-1.
3. If a plastic or nylon reinforced pit liner is used, it shall be torn and perforated before backfilling of the reserve pit.
4. Before any dirt work to restore the location takes place, the reserve pit will be completely dry and all cans, barrels, pipe, etc. will be removed. Other waste and spoil materials will be disposed of immediately upon completion of drilling and workover activities.
5. The reserve pit and that portion of the location and access road not needed for production facilities/operations will be reclaimed within ninety (90) days from the date of well completion, weather permitting.

10. Plans for Reclamation of the Surface:

A. Production - Continued

6. For production, the fill slopes will be reduced from a 1.5:1 slope to a 3:1 slope and the cut slopes will be reduced from a 1.5:1 slope to a 3:1 slope by pushing the fill material back up into the cut.
7. Upon completion of backfilling, leveling and re-contouring, the stockpiled topsoil will be evenly spread over the reclaimed area(s). Prior to reseeding, all disturbed surfaces (including the access road and location) will be scarified and left with a rough surface. No depressions will be left that would trap water and form ponds. All disturbed surfaces (including the access road and well pad areas) will be reseeded with the following seed mixture recommended by the Bureau of Land Management:

<u>Species</u>	<u>Lbs. PLS/Acre</u>
Hi-Crest Created Wheatgrass	5.0
Four-Wing Saltbush	6.0
Yellow Sweet Clover	1.0

Seed will be drilled on the contour to an approximate depth of one-half (1/2) inch. All seeding will be conducted after September 15 and prior to ground frost.

B. Dry Hole/Abandoned Location

1. At such time as the well is physically plugged and abandoned, Coastal Oil & Gas Corporation will submit a "Subsequent Report of Abandonment" to the Authorized Officer for approval. At that time, the Bureau of Land Management will formulate the appropriate surface rehabilitation requirements and attach them as the conditions of approval for final abandonment.

11. Surface Ownership:

The well site and proposed access road are situated on surface estate which is owned by the United States of America.

11. Surface Ownership:

These federal lands are administered by:

Area Manager
Book Cliffs Resource Area Office
Bureau of Land Management
170 South 500 East
Vernal, Utah 84078
Phone: (801) 789-1362

12. Other Information:

- A. General Description of the Project Area: The proposed drill site is located within the Natural Buttes Unit in an area of northeastern Utah and more specifically in an area of moderately to severely eroded uplands located between the White River to the east (and north), the Green River to the west, Bitter Creek to the southeast, and Willow Creek to the southwest.

This area is classified as a "High Plains Steppe" (Cold Desert) and is characterized by gently to moderately undulated uplands dissected by numerous dendritically-patterned, ephemeral drainages of both the Green and White Rivers. Generally, local flora consists of native grasses such as salt grass, galleta grass, needle-and thread grass, Indian ricegrass; and woody species such as shadscale, horsebrush, black sagebrush, fringe sagebrush, big sagebrush, rabbitbrush, and greasewood along the dry drainages. Local fauna consists of mule deer, antelope, coyotes, rabbits, raptors, and various smaller vertebrate and invertebrate species.

There are no known threatened or endangered species that will be affected by implementation of operations on the proposed NBU #114 well location.

- B. Surface Use Activities: The primary surface use is for grazing.
- C. Proximity of Water, Occupied Dwellings, Archaeological, Historical or Cultural Sites:
1. The closest source of permanent water is the White River, located approximately 8.0 miles to the north.

12. Other Information:

C. Proximity of Water, Occupied Dwellings, Archaeological, Historical or Cultural Sites:

2. The closest occupied dwellings are located in the town of Ouray, approximately 12.0 miles to north-west.
3. Coastal Oil & Gas Corporation will be responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites or for collecting artifacts. If historic or archaeological materials are uncovered, Coastal Oil & Gas Corporation will suspend all operations that might further disturb such materials and immediately contact the Authorized Officer.

Within five (5) working days the Authorized Officer will inform Coastal Oil & Gas Corporation as to:

- whether the materials appear eligible for the National Register of Historic Places;
- the mitigation measures the operator will likely have to undertake before the site can be used (assuming in situ preservation is not necessary); and
- a time frame for the Authorized Officer to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the Authorized Officer are correct and that mitigation is appropriate.

If Coastal Oil & Gas Corporation wishes, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the Authorized Officer will assume responsibility for whatever recordation and stabilization of the exposed materials may be required. Otherwise, Coastal Oil & Gas Corporation will be responsible for mitigation costs.

12. Other Information:

- C. Proximity of Water, Occupied Dwellings, Archaeological, Historical or Cultural Sites: Continued
3. The Authorized Officer will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the Authorized Officer that the required mitigation has been completed, Coastal Oil & Gas Corporation will then be allowed to resume construction.
- D. Additional Stipulations for Operations on Lands Administered by the Bureau of Land Management:
1. Coastal Oil & Gas Corporation will control noxious weeds along rights-of-way for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds may be obtained from the Bureau of Land Management, or the Uintah County Extension Office. On lands administered by the Bureau of Land Management, it is required that a "Pesticide Use Proposal" shall be submitted, and approval obtained, prior to the application of herbicides or other pesticides or possible hazardous chemicals for the control of noxious weeds.
 2. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on federal lands after conclusion of drilling operations or at any other time without the proper authorization from the Bureau of Land Management. However, if BLM authorization is obtained, it is only a temporary measure to allow Coastal Oil & Gas Corporation the time to make arrangements for permanent storage at a commercial facility.
 3. No construction or drilling activities shall be conducted between May 15 and June 20 in order to protect crucial Antelope kidding areas.
 4. An erosion control structure will be constructed in a minor drainage below (north of) the proposed well pad. The actual location of the erosion control structure will be determined by the Bureau of Land Management at the time of well pad construction.

12. Other Information:

D. Additional Stipulations for Operations on Lands
Administered by the Bureau of Land Management: Cont.

5. Coastal Oil & Gas Corporation shall contact the Bureau of Land Management between 24 and 48 hours prior to commencement of construction activities on the access road and/or well location: (801) 789-1362.
6. The Bureau of Land Management shall be notified upon site completion and prior to moving drilling tools onto the location.

13. Lessee's or Operator's Representative and Certification:

Representative

Coastal Oil & Gas Corporation
Randy L. Bartley, Operations Manager
P.O. Box 749
Denver, Colorado 80201-0749
Phone: (303) 572-1121

Heitzman Drill-Site Services*
Dale Heitzman and/or Robert M. Anderson
P.O. Drawer 3579
Casper, Wyoming 82602
Phone: (307) 266-4840

* Contact for any additional information which may be required for approval of this Application for Permit to Drill.

Certification:

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil & Gas Orders, the approved plan of operations, and any applicable Notice to Lessees.

Coastal Oil & Gas Corporation will be fully responsible for the actions of their subcontractors. A complete copy of the approved Application for Permit to Drill will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.


13. Lessee's or Operator's Representative and Certification:

Certification: Continued

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Coastal Oil & Gas Corporation, its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

12 December 1990
Date


Robert M. Anderson/Authorized Agent

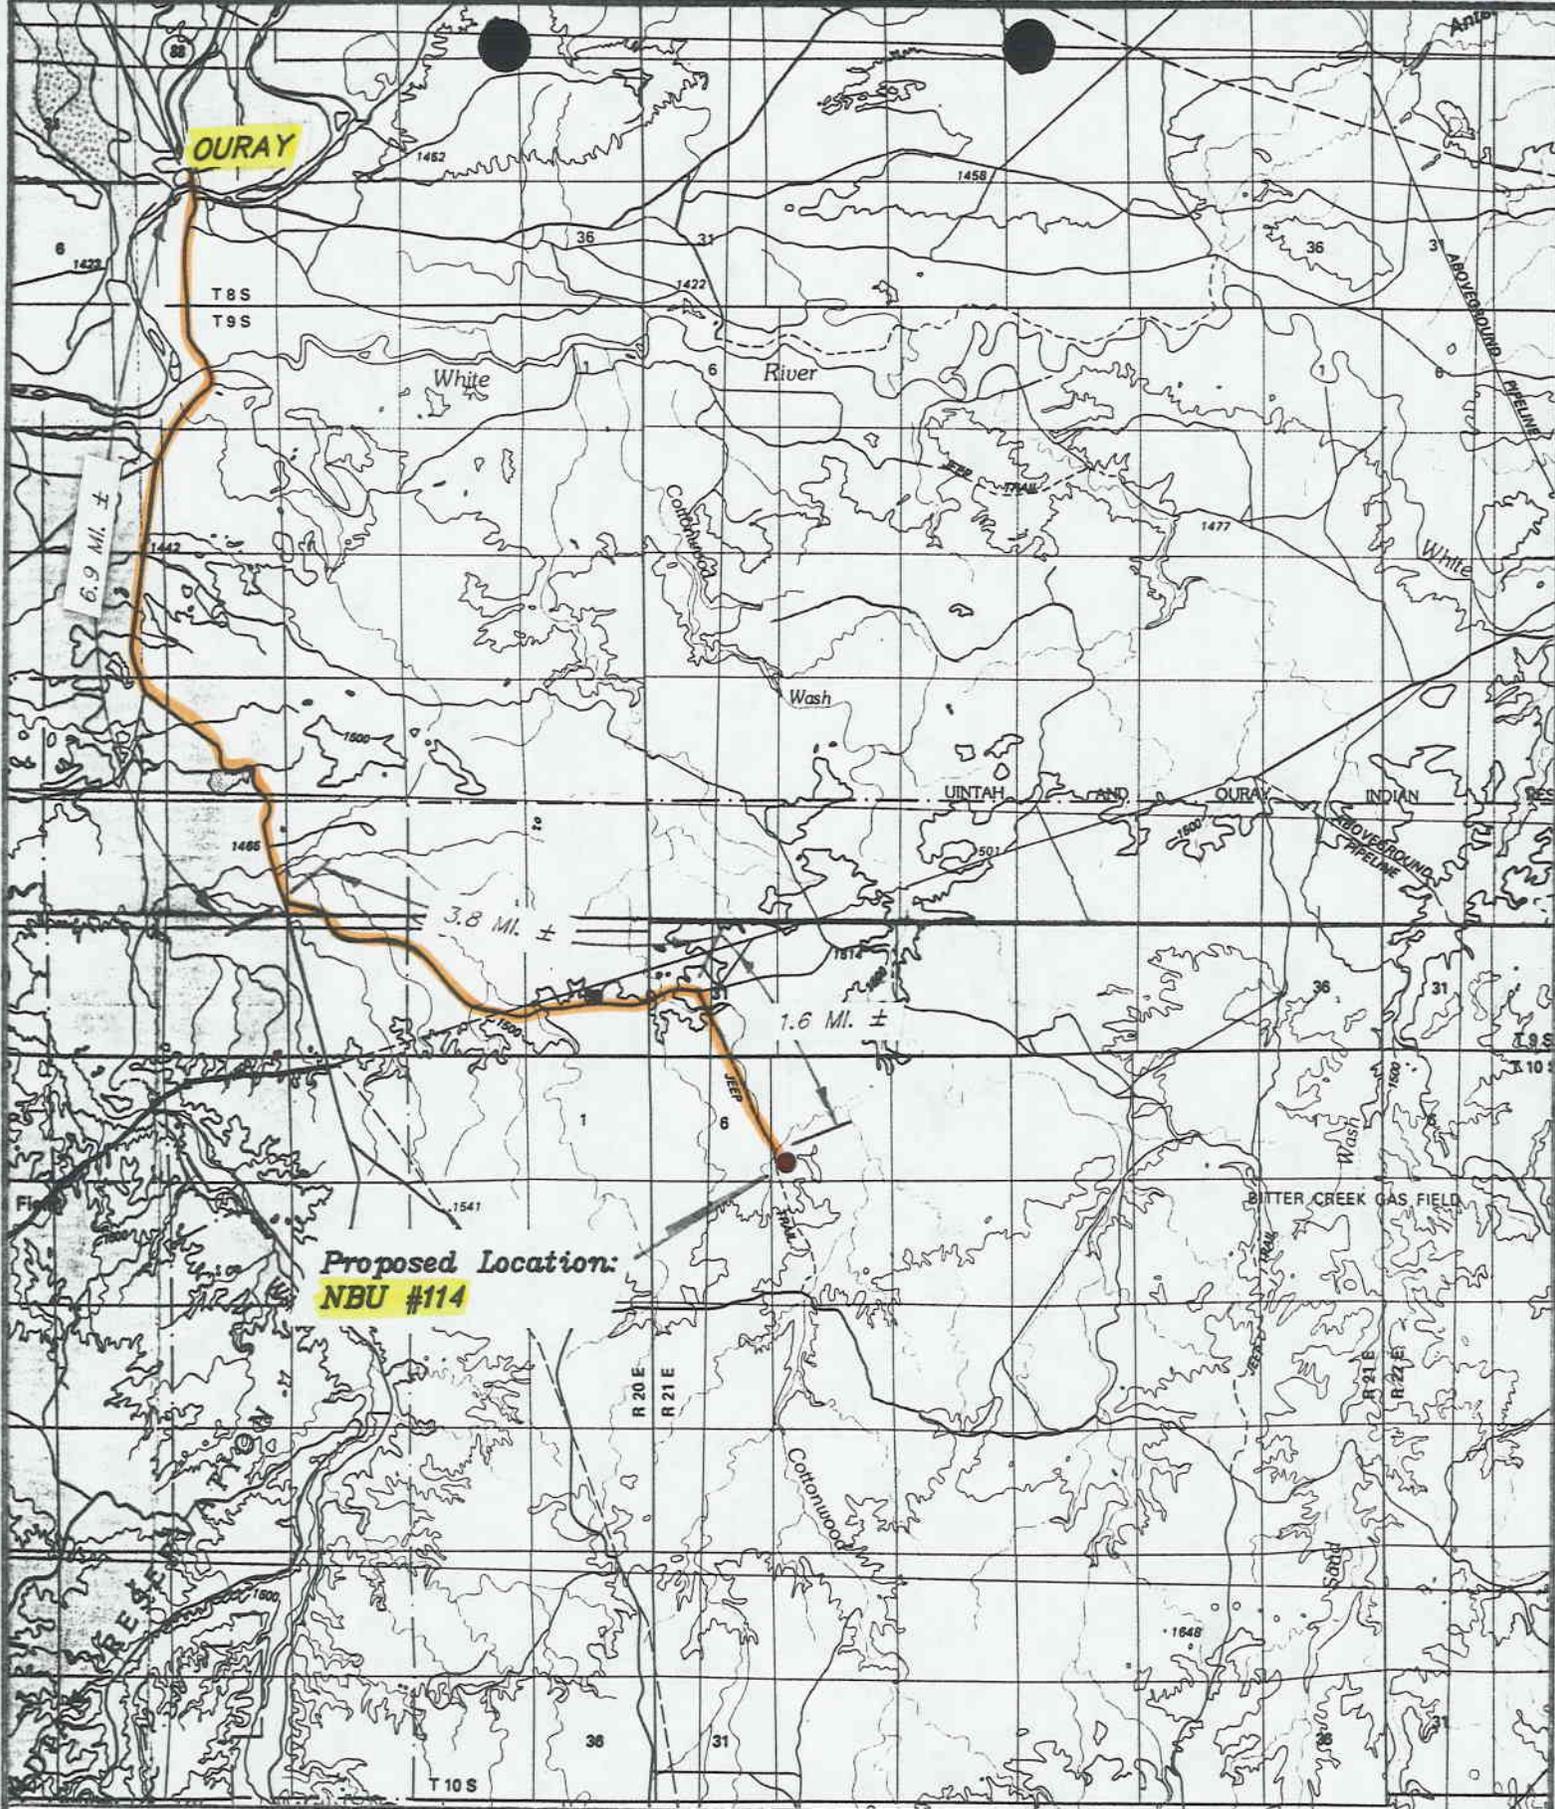

Proposed Location:
NBU #114


**TOPOGRAPHIC
 MAP "A"**

DATE 9-30-90



COASTAL OIL & GAS CORP.


NBU #114
 SECTION 5, T10S, R21E, S.L.B.&M.

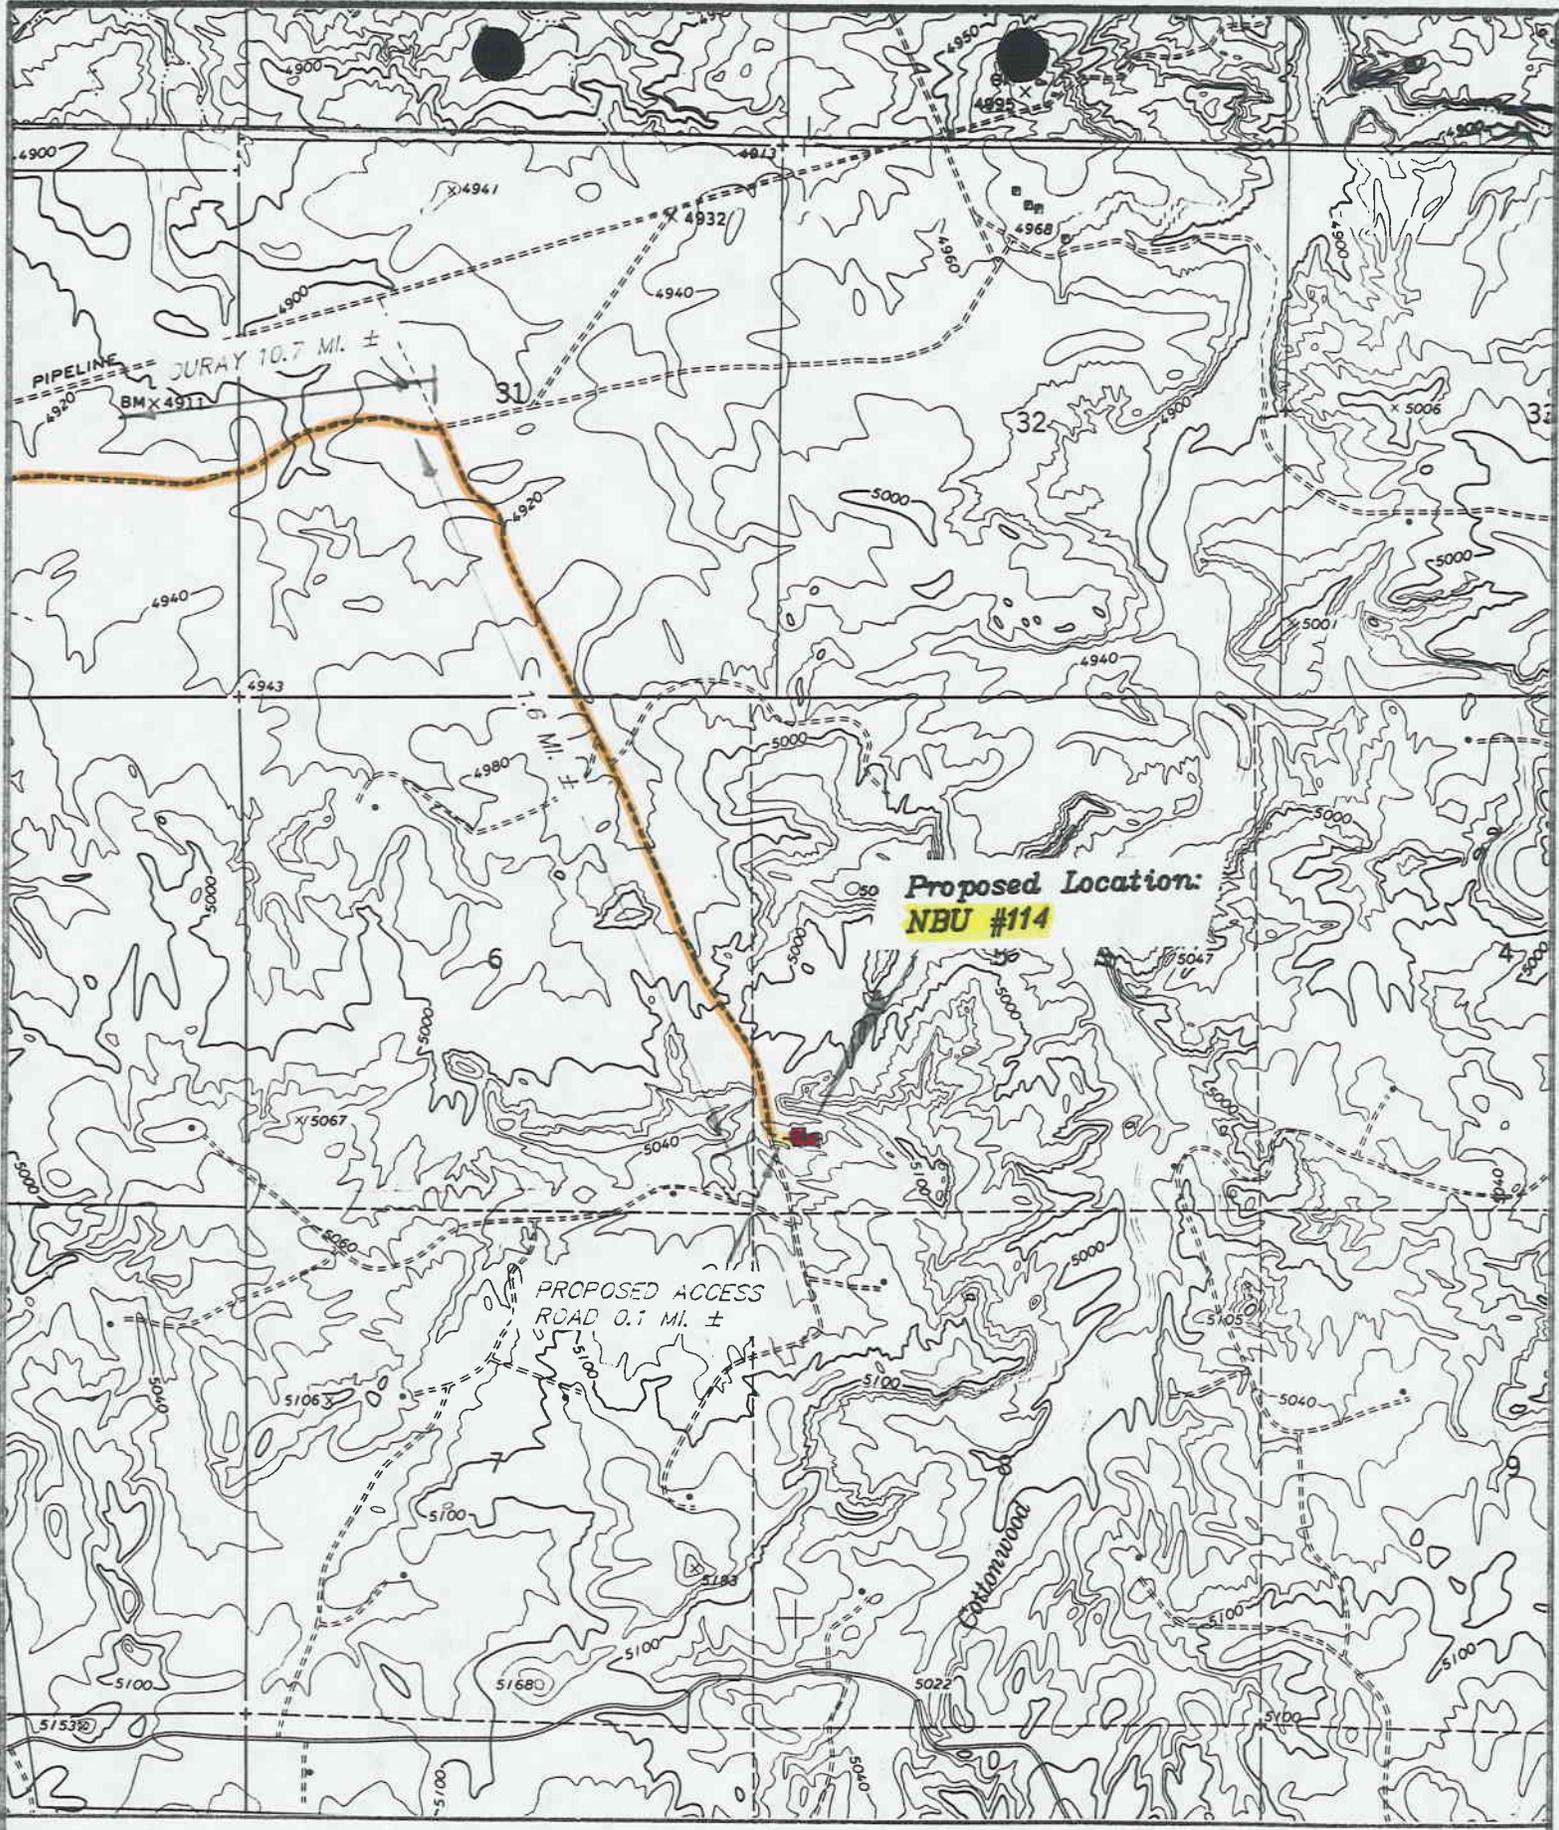

TOPOGRAPHIC
 MAP "B"
 SCALE: 1" = 2000'
 DATE 3-30-90



COASTAL OIL & GAS CORP.
 NBU #114
 SECTION 5, T10S, R21E, S.L.B.&M.

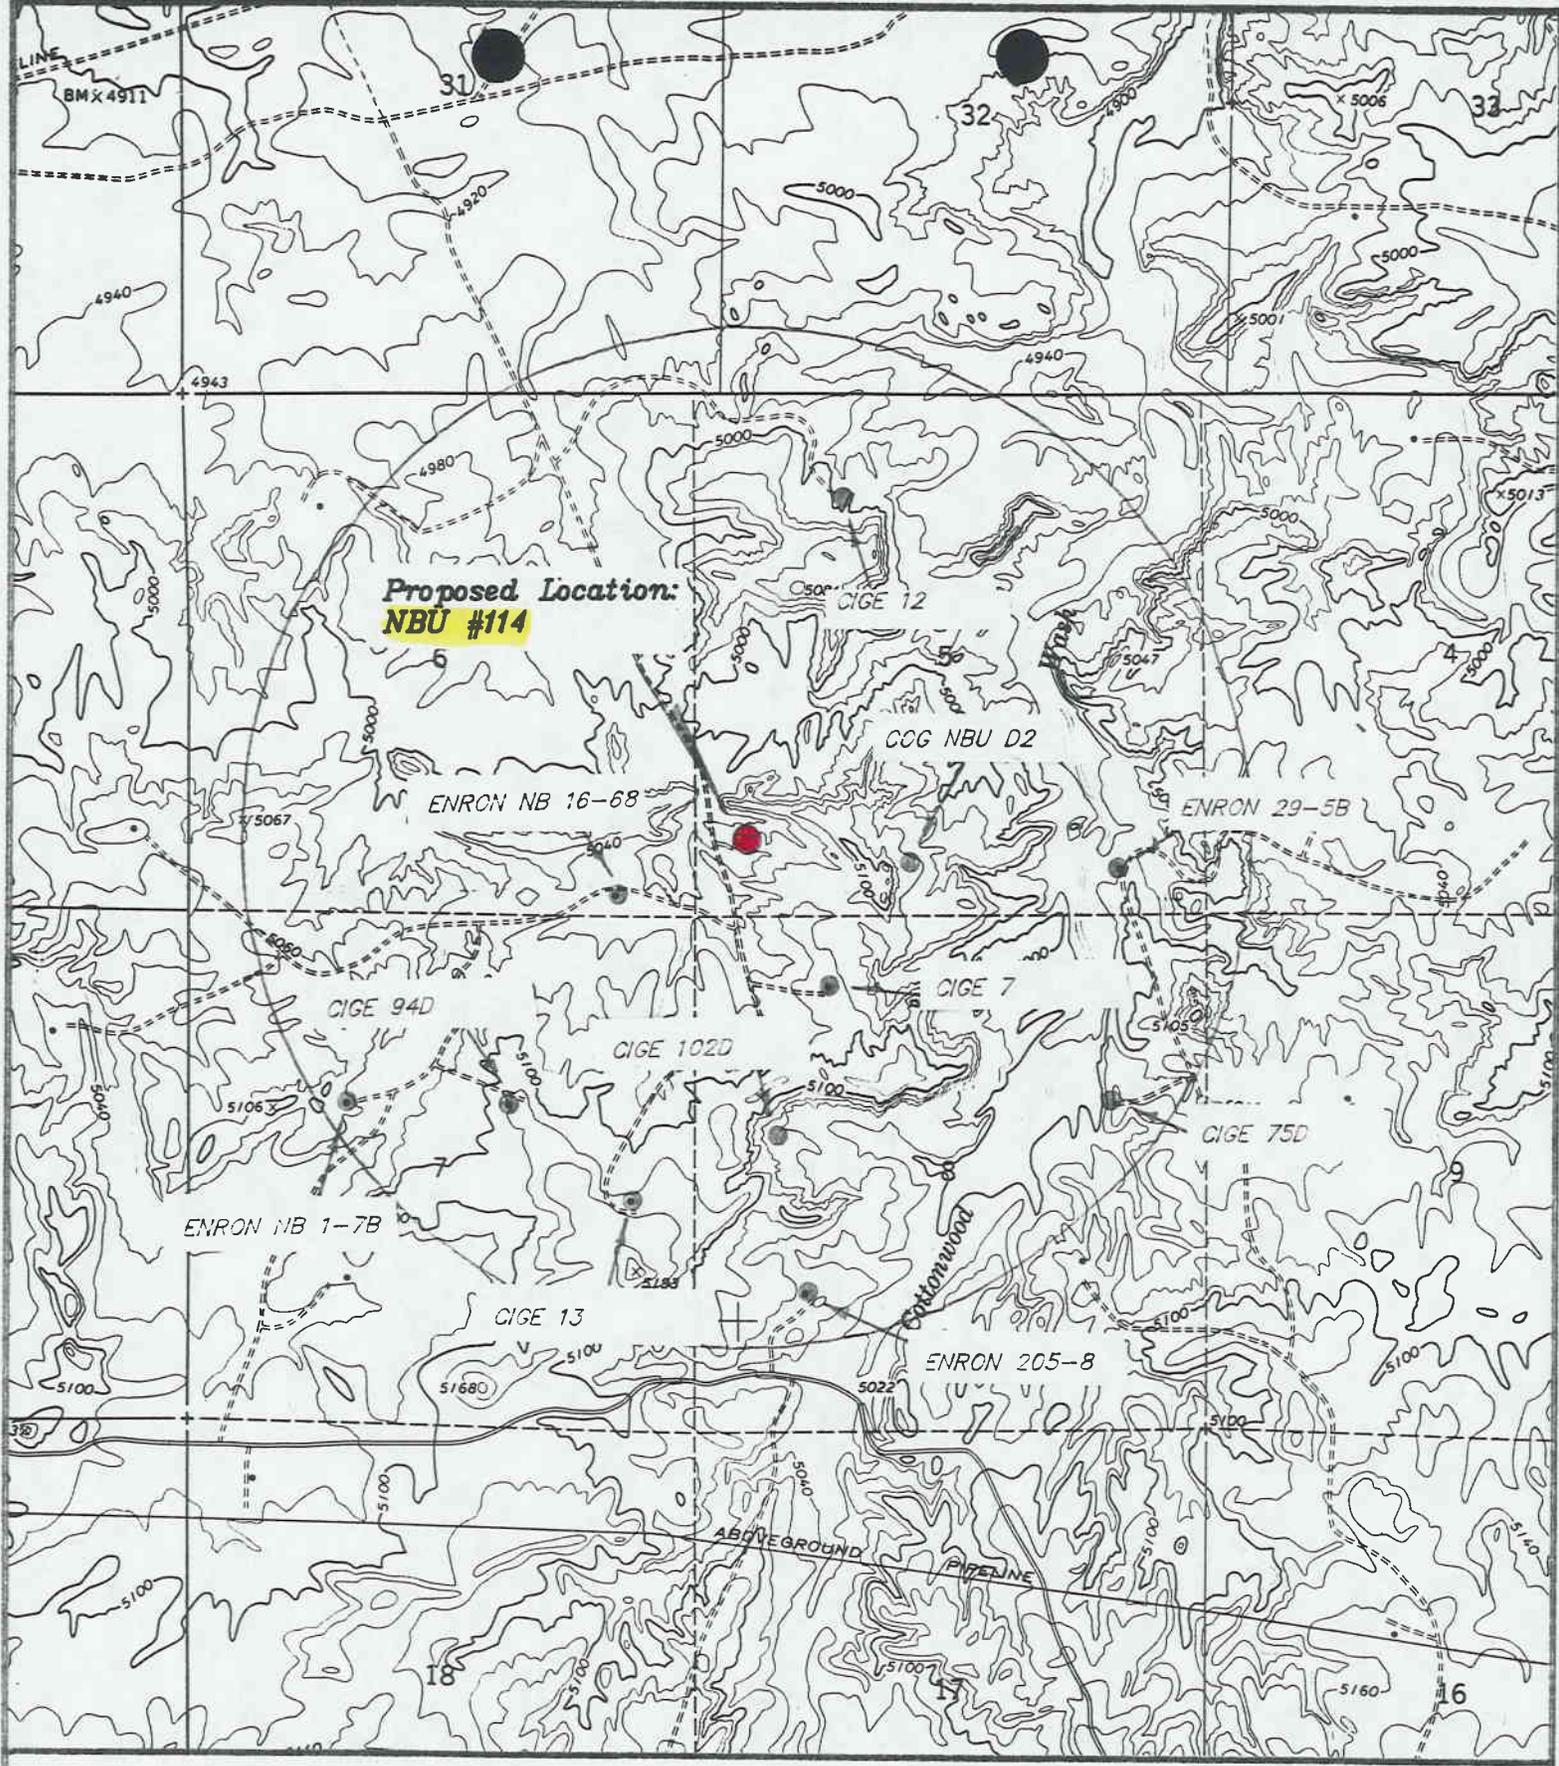

LEGEND:



- ⊗ = Water Wells
- = Abandoned Wells
- ⊙ = Temporarily Abandoned Wells
- ⊘ = Disposal Wells
- = Drilling Wells
- = Producing Wells
- = Shut-in Wells

COASTAL OIL & GAS CORP.

NBU #114
 SECTION 5, T10S, R21E, S.L.B.&M.
 T O P O M A P " C "

DATE: 9-30-90


COASTAL OIL & GAS
 LOCATION LAYOUT FOR
 NBU #114
 SECTION 5, T10S, R21E, S.L.B.&M.

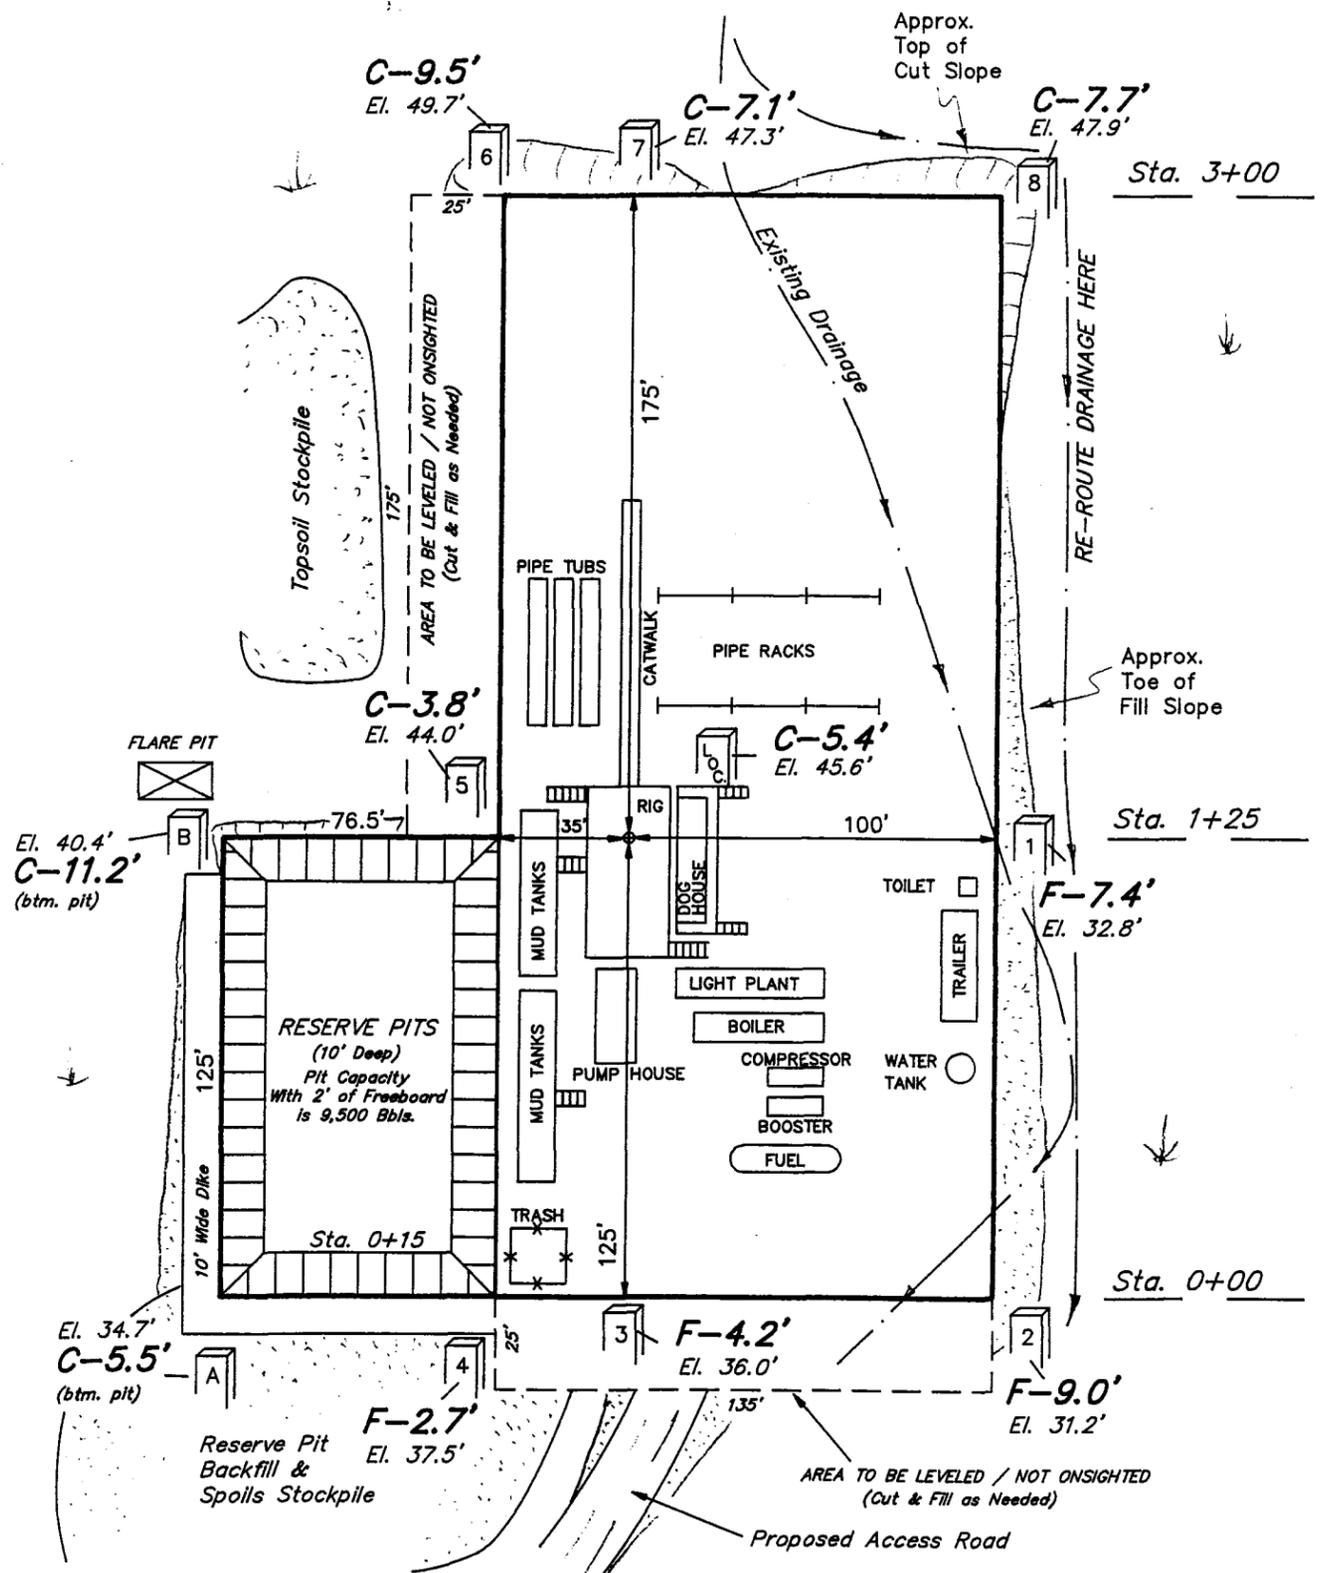

SCALE: 1" = 50'
 DATE: 9-27-90
 Drawn By: J.R.S.
 REVISED: 12-8-90 T.D.H.

X-Section Scale
 1" = 20'
 1" = 50'

TYP. LOCATION LAYOUT TYP. CROSS SECTIONS

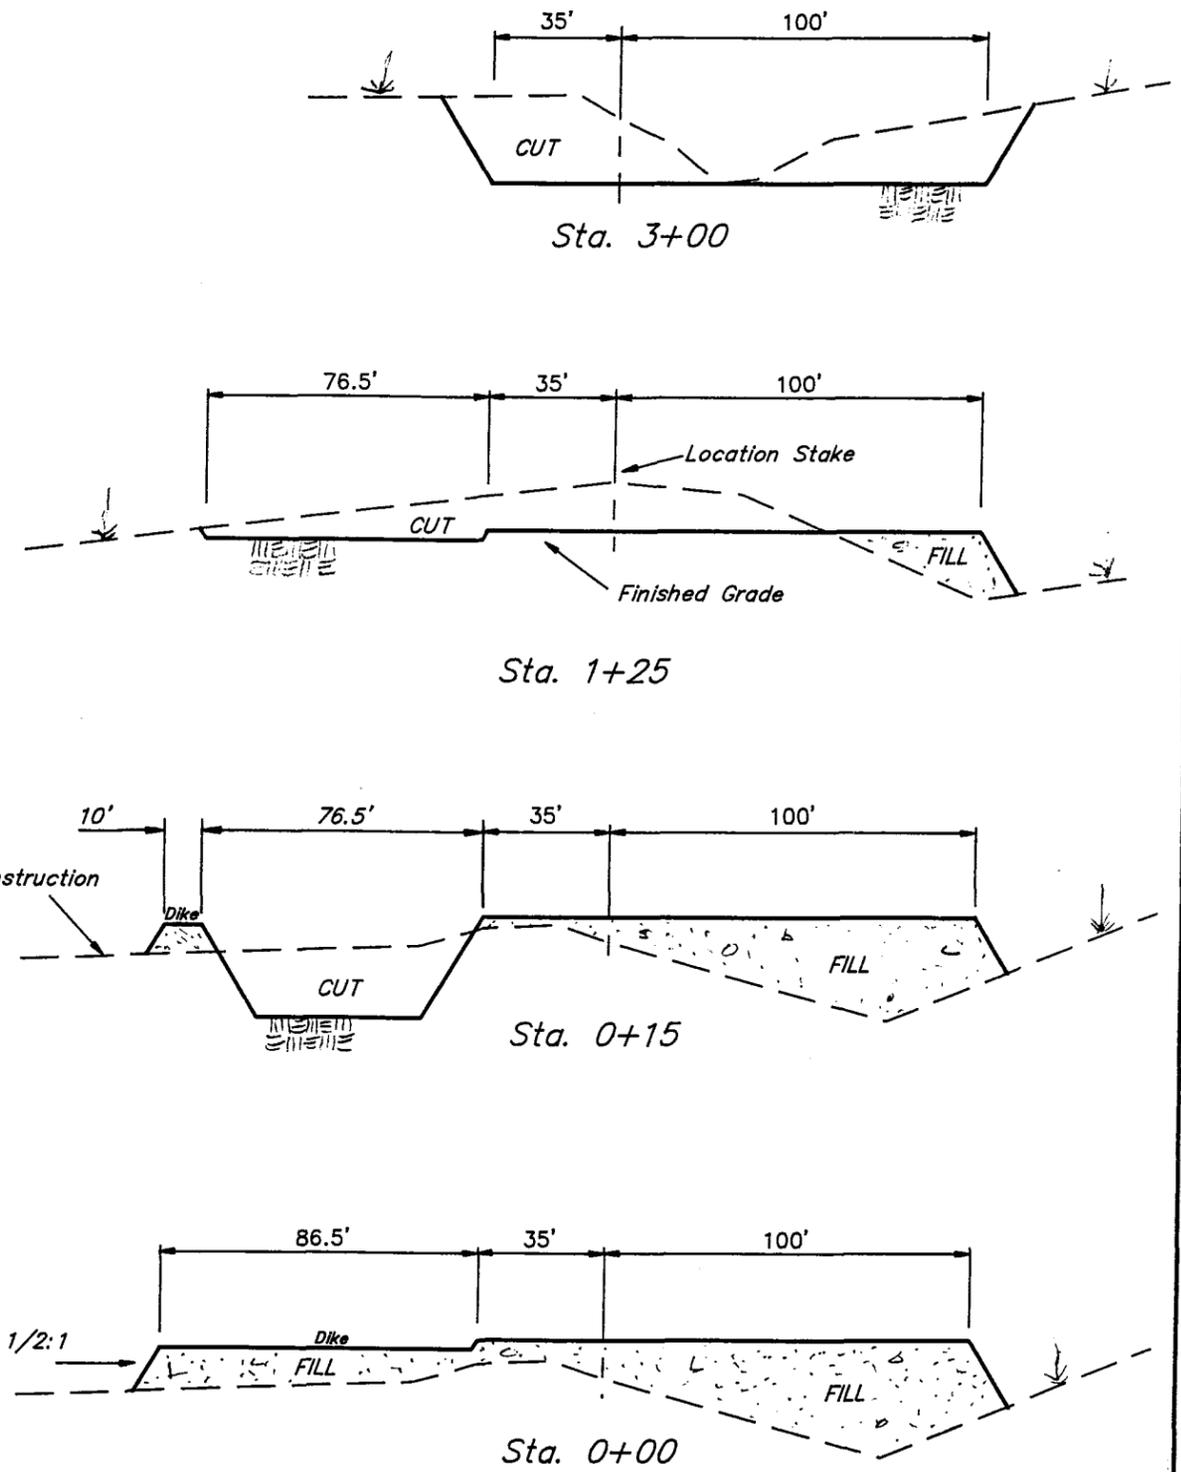

APPROXIMATE YARDAGES

CUT (6") Topsoil Stripping	= 1,000 Cu. Yds.	EXCESS MATERIAL AFTER 5% COMPACTION	= 2,250 Cu. Yds.
Remaining Location	= 5,860 Cu. Yds.	Topsoil & Pit Backfill (1/2 Pit Vol.)	= 2,220 Cu. Yds.
TOTAL CUT	= 6,860 CU.YDS.	EXCESS UNBALANCE (After Rehabilitation)	= 30 Cu. Yds.
FILL	= 4,380 CU.YDS.		

Elev. Ungraded Ground At Loc. Stake = 5045.6'
 FINISHED GRADE ELEV. AT LOC. STAKE = 5040.2'

OPERATOR Coastal Oil Gas Corp #0030 DATE 10-06-90

WELL NAME NBU 114

SEC S45W 5 T 10S R 01E COUNTY Mintah

43-047-31903
API NUMBER

Federal (1)
TYPE OF LEASE

CHECK OFF:

PLAT

BOND

NEAREST WELL

LEASE

FIELD SLBM

POTASH OR OIL SHALE

PROCESSING COMMENTS:

1991 P.O.D. approved 10-00-90 by Dennis Thompson
states Permit 49-991 (A57530)
Oil shale area

APPROVAL LETTER:

SPACING:

R615-2-3

Natural Buttes
UNIT

R615-3-2

N/A
CAUSE NO. & DATE

R615-3-3

STIPULATIONS:

Oil shale stipulation



State of Utah

DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Norman H. Bangerter

Governor

Dee C. Hansen

Executive Director

Dianne R. Nielson, Ph.D.

Division Director

355 West North Temple

3 Triad Center, Suite 350

Salt Lake City, Utah 84180-1203

801-538-5340

December 27, 1990

Coastal Oil & Gas Corporation
P. O. Box 749
Denver, Colorado 80201-0749

Gentlemen:

Re: NBU 114 - SW SW Sec. 5, T. 10S, R. 21E - Uintah County, Utah
767' FSL, 526' FWL

Approval to drill the referenced well is hereby granted in accordance with Section 40-6-18, Utah Code Annotated, as amended 1983; and predicated on Rule R615-2-3, Oil and Gas Conservation General Rules, subject to the following stipulation:

1. Special attention is directed to compliance with Rule R615-3-31, which prescribes drilling procedures for designated oil shale areas.

In addition, the following actions are necessary to fully comply with this approval:


1. Spudding notification within 24 hours after drilling operations commence.
2. Submittal of an Entity Action Form within five working days following spudding and whenever a change in operations or interests necessitates an entity status change.
3. Submittal of the Report of Water Encountered During Drilling, Form 7.
4. Prompt notification if it is necessary to plug and abandon the well. Notify R. J. Firth, Associate Director, (Office) (801) 538-5340, (Home) 571-6068, or Jim Thompson, Lead Inspector, (Home) 298-9318.
5. Compliance with the requirements of Rule R615-3-20, Gas Flaring or Venting, Oil and Gas Conservation General Rules.

Page 2
Coastal Oil & Gas Corporation
NBU 114
December 27, 1990

6. Prior to commencement of the proposed drilling operations, plans for facilities for disposal of sanitary wastes at the drill site shall be submitted to the local health department. These drilling operations and any subsequent well operations must be conducted in accordance with applicable state and local health department regulations. A list of local health departments and copies of applicable regulations are available from the Division of Environmental Health, Bureau of General Sanitation, telephone (801) 538-6121.
7. This approval shall expire one (1) year after date of issuance unless substantial and continuous operation is underway or an application for an extension is made prior to the approval expiration date.

The API number assigned to this well is 43-047-31923.

Sincerely,



R. J. Firth
Associate Director, Oil & Gas

tas
Enclosures
cc: Bureau of Land Management
J. L. Thompson
we14/1-2

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK
 DRILL DEEPEN PLUG BACK

b. TYPE OF WELL
 OIL WELL GAS WELL OTHER SINGLE ZONE MULTIPLE ZONE

2. NAME OF OPERATOR
 Coastal Oil & Gas Corporation

3. ADDRESS OF OPERATOR
 P.O. Box 749; Denver, Colorado 80201-0749

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*)
 At surface: 767' FSL, 526' FWL (SW $\frac{1}{4}$ SW $\frac{1}{4}$) Section 5, T10S, R21E
 At proposed prod. zone: Same as Above

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*
 Approximately twelve (12) miles southeast of Ouray, Utah

15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drig. unit line, if any) 526'

16. NO. OF ACRES IN LEASE 562.50

17. NO. OF ACRES ASSIGNED TO THIS WELL 80

18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT. 1,400'±

19. PROPOSED DEPTH 6,050'

20. ROTARY OR CABLE TOOLS Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.) 5046' GR

22. APPROX. DATE WORK WILL START* February 25, 1991

5. LEASE DESIGNATION AND SERIAL NO.
 UTU-01303D

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
 Not Applicable

7. UNIT AGREEMENT NAME
 Natural Buttes

8. FARM OR LEASE NAME
 NBU

9. WELL NO.
 114

10. FIELD AND POOL, OR WILDCAT
 Natural Buttes

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
 Section 5, T10S, R21E

12. COUNTY OR PARISH
 Uintah

13. STATE
 Utah

23. PROPOSED CASING AND CEMENTING PROGRAM (ALL NEW)

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12-1/4"	8-5/8" K-55	24.0#	0- 250'	180 sx, Circulated to Surface*
7-7/8"	5-1/2" K-55	17.0#	0-6,050'	545 sx, Circulated to Surface*

* Cement volumes may change due to hole size. Calculate from caliper log.

RECEIVED
FEB 05 1991

DIVISION OF
OIL, GAS & MINING

EIGHT-POINT RESOURCE PROTECTION PLAN ATTACHED

I hereby certify that Coastal Oil & Gas Corporation is authorized by the proper Lease Interest Owners to conduct lease operations associated with this Application for Permit to Drill the NBU #114, Federal Lease #UTU-01303D. Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by Coastal Oil & Gas Corporation, Nationwide Bond #CO-0018, who will be responsible for compliance with all the terms and conditions of that portion of the lease associated with this Application.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED Randy D. Bartley TITLE Manager, Drilling & Prod. DATE 12/10/90
 (This space for Federal or State office use)

PERMIT NO. _____ APPROVAL DATE _____
 APPROVED BY [Signature] TITLE ASSISTANT DISTRICT MANAGER MINERALS DATE 2/1/91
 CONDITIONS OF APPROVAL, IF ANY: _____

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED TO OPERATOR'S COPY

*See Instructions On Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Ut080-1m23

Div OG+M

Revised November 1990

Date NOS Received: November 26, 1990

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Coastal Oil and Gas Corp.

Well Name & Number: NBU 114

Lease Number: U-01393D

Location: SWSW Section 5, T. 10S, R. 21E

Surface Ownership: BLM

NOTIFICATION REQUIREMENTS

- Location Construction - at least forty-eight (48) hours prior to construction of location and access roads.
- Location Completion - prior to moving on the drilling rig.
- Spud Notice - at least twenty-four (24) hours prior to spudding the well.
- Casing String and Cementing - at least twenty-four (24) hours prior to running casing and cementing all casing strings.
- BOP and Related Equipment Tests - at least twenty-four (24) hours prior to initiating pressure tests.
- First Production Notice - within five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill.

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas Orders, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to Tim Ingwell of this office. Copies of State of Utah Form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

2. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint.

3. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

4. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem Tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the Authorized Officer. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized, and if adequate lighting is available (i.e., lighting which is adequate for visibility and vaporproof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the Authorized Officer.

A cement bond log (CBL) shall be utilized to determine the top of cement (TOC) for the production casing.

5. Notifications of Operations

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated, or the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated, or the date on which gas is first measured through permanent metering facilities, whichever first occurs.

All site security regulations as specified in Onshore Oil and Gas Order No. 3 shall be adhered to.

6. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the AO.

Gas meter runs for each well will be located within 500 feet of the wellhead. The gas flowline will be buried or anchored down from the wellhead to the meter and 500 feet downstream of the meter run or any production facilities. Meter runs will be housed and/or fenced.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries. Tests for meter accuracy will be conducted monthly for the first three months on new meter installations and at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with the Onshore Oil and Gas Order No. 4 for liquid hydrocarbons and Onshore Oil and Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned, will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hour approvals are necessary, please contact one of the following individuals:

Gerald E. Kenczka (801) 781-1190
Petroleum Engineer

Ed Forsman (801) 789-7077
Petroleum Engineer

BLM FAX Machine: (801) 789-3634

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous:

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids.

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste.

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation, and miscellaneous solids.

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

B/M Bond No. CO 0018
SUBMIT IN DUPLICATE*
(Other instructions on reverse side)

Form approved.
Budget Bureau No. 1004-0136
Expires August 31, 1985

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK
 DRILL DEEPEN PLUG BACK

b. TYPE OF WELL
 OIL WELL GAS WELL OTHER SINGLE ZONE MULTIPLE ZONE

2. NAME OF OPERATOR
 Coastal Oil & Gas Corporation

3. ADDRESS OF OPERATOR
 P.O. Box 749; Denver, Colorado 80201-0749

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)*
 At surface: 767' FSL, 526' FWL (SW $\frac{1}{4}$ SW $\frac{1}{4}$) Section 5, T10S, R21E
 At proposed prod. zone: Same as Above

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*
 Approximately twelve (12) miles southeast of Ouray, Utah

15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any) 526'

16. NO. OF ACRES IN LEASE 562.50

17. NO. OF ACRES ASSIGNED TO THIS WELL 80

18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT. 1,400'±

19. PROPOSED DEPTH 6,050'

20. ROTARY OR CABLE TOOLS Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.) 5046' GR

22. APPROX. DATE WORK WILL START* February 25, 1991

5. LEASE DESIGNATION AND SERIAL NO.
 UTU-01303D

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
 Not Applicable

7. UNIT AGREEMENT NAME
 Natural Buttes

8. FARM OR LEASE NAME
 NBU

9. WELL NO.
 114

10. FIELD AND POOL, OR WILDCAT
 Natural Buttes

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
 Section 5, T10S, R21E

12. COUNTY OR PARISH 13. STATE
 Uintah Utah

23. PROPOSED CASING AND CEMENTING PROGRAM (ALL NEW)

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12-1/4"	8-5/8" K-55	24.0#	0- 250'	180 sx, Circulated to Surface*
7-7/8"	5-1/2" K-55	17.0#	0-6,050'	545 sx, Circulated to Surface*

* Cement volumes may change due to hole size. Calculate from caliper log.

RESERVED
FEB 13 1991

EIGHT-POINT RESOURCE PROTECTION PLAN ATTACHED

I hereby certify that Coastal Oil & Gas Corporation is authorized by the proper Lease Interest Owners to conduct lease operations associated with this Application for Permit to Drill the NBU #114, Federal Lease #UTU-01303D. Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by Coastal Oil & Gas Corporation, Nationwide Bond #CO-0018, who will be responsible for compliance with all the terms and conditions of that portion of the lease associated with this Application.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED Randy D. Bartley TITLE Manager, Drilling & Prod. DATE 12/10/90
 (This space for Federal or State office use)

PERMIT NO. _____ APPROVAL DATE _____

APPROVED BY [Signature] TITLE ASSISTANT DISTRICT MANAGER MINERALS DATE 2/1/91
 CONDITIONS OF APPROVAL, IF ANY:

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED TO OPERATOR'S COPY

*See Instructions On Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Ut080-1m23
21-942

WATER PERMIT OK

DIVISION OF OIL, GAS AND MINING

API NO. 43-047-31923 *dl*

SPUDDING INFORMATION

NAME OF COMPANY: COASTAL OIL & GAS

WELL NAME: NBU #114

SECTION SWSW 5 TOWNSHIP 10S RANGE 21E COUNTY UINTAH

DRILLING CONTRACTOR CIRCLE L

RIG # 7C

SPUDDED: DATE 2-11-91

TIME _____

HOW DRY HOLE

DRILLING WILL COMMENCE UNKNOWN

REPORTED BY LARRY TAVEGIA

TELEPHONE # 781-1736

DATE 2-19-91 SIGNED TAS

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

5. Lease Designation and Serial No.

UTU-01393D

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA, Agreement Designation

Natural Buttes Unit

8. Well Name and No.

NBU #114

9. API Well No.

43-047-31923 *del*

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah County, Utah

SUBMIT IN TRIPLICATE

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No.

P. O. Box 749, Denver, Colorado 80201-0749 (303) 573-4476

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

767' FSL & 526' FWL
Section 5, T10S-R21E

CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

Notice of Intent

Subsequent Report

Final Abandonment Notice

Abandonment

Recompletion

Plugging Back

Casing Repair

Altering Casing

Other Report of spud

Change of Plans

New Construction

Non-Routine Fracturing

Water Shut-Off

Conversion to Injection

Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

- 1) MIRU Leon Ross Drilling, Inc. Spud well 2/11/91. Drilled 12-1/4" hole to 260'. Ran 8-5/8", 24#, K55, ST&C csg & set @ 249'. Cmt'd w/180 sxs Cl "G" + add. CMT to surface.
- 2) Spud well w/rotary rig 3:00 AM, 2/24/91. Drilling ahead.

RECEIVED
MAR 07 1991

DIVISION OF
OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Signed

Eileen Danni Bey

Title

Regulatory Analyst

Date

3-4-91

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See instruction on Reverse Side



State of Utah

DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Norman H. Bangerter
Governor

Dee C. Hansen
Executive Director

Dianne R. Nielson, Ph.D.
Division Director

355 West North Temple
3 Triad Center, Suite 350
Salt Lake City, Utah 84180-1203
801-538-5340

April 5, 1991

Ms. Eileen Danni Dey
Coastal Oil & Gas Corporation
P. O. Box 749
Denver, Colorado 80201-0749

Dear Ms. Dey:

Re: Request for Completed Entity Action Form *del*
NBU #114 - SWSW Sec. 5, T. 10S, R. 21E - Uintah County, Utah

This is written to remind you that all well operators are responsible for sending an Entity Action Form to the Division of Oil, Gas and Mining within five working days of spudding a new well. This office was notified that your company spudded the NBU #114, API Number 43-047-31923, on February 11, 1991. At this time, we have not received an Entity Action Form for this well.

Please review the instructions on the back of the enclosed form. Make sure you choose the proper Action Code to show whether the well will be a single well with its own sales facilities (Code A), a well being added to an existing group of wells having the same tank battery and common division of royalty interest (Code B - show existing Entity Number to which well should be added), or a well being drilled in the participating area of a properly designated unit (Code B). Complete the form and return it to us by April 17, 1991.

Your attention to this matter is appreciated. If we can be of assistance to you, please feel free to call Lisha Romero at the above number.

Sincerely,

Don Staley
Administrative Supervisor

lcr
Enclosure
cc: R. J. Firth
File
WE66/11
an equal opportunity employer

ENTITY ACTION FORM - FORM 6

OPERATOR Coastal Oil & Gas Corporation

OPERATOR ACCT. NO. N 0230

ADDRESS P. O. Box 749

Denver, Colorado 80201-0749

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
B	2900		43-047-31924 ^{del}	NBU #110	NENE	28	9S	21E	Uintah	2/4/91	2/4/91
WELL 1 COMMENTS: Fed.-Lease Proposed Zone-wsrc * All 3 wells. Field-Natural Buttes Unit-Natural Buttes (Entity added 4-19-91) ^{per}											
B	2900		43-047-31923 ^{del}	NBU #114	SWSW	5	10S	21E	Uintah	2/11/91	2/11/91
WELL 2 COMMENTS:											
B	2900		43-047-31939 ^{del}	NBU #137	SESE	30	9S	22E	Uintah	2/15/91	2/15/91
WELL 3 COMMENTS:											
WELL 4 COMMENTS:											
WELL 5 COMMENTS:											

ACTION CODES (See instructions on back of form)

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

RECEIVED

APR 17 1991

DIVISION OF
OIL GAS & MINING

Eileen Danni Dey
Signature Eileen Danni Dey

Regulatory Analyst 2-19-91
Title Date

Phone No. (303) 573-4476

ENTITY ACTION FORM - FORM 6

OPERATOR Coastal Oil & Gas Corporation

OPERATOR ACCT. NO. N 0730

ADDRESS P. O. Box 749

Denver, Colorado 80201-0749

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
A	2900 →		43-047-31924	NBU #110	NENE	28	9S	21E	Uintah	2/4/91	2/4/91
WELL 1 COMMENTS: <i>(Entity 2900 was added 4-19-91) fr</i>											
A	2900 →		43-047-31923	NBU #114	SWSW	5	10S	21E	Uintah	2/11/91	2/11/91
WELL 2 COMMENTS: <i>(Entity 2900 was added 4-19-91) fr</i>											
A	2900 →		43-047-31939	NBU #137	SESE	30	9S	22E	Uintah	2/15/91	2/15/91
WELL 3 COMMENTS: <i>(Entity 2900 was added 4-19-91) fr</i>											
WELL 4 COMMENTS:											
WELL 5 COMMENTS:											

ACTION CODES (See instructions on back of form)

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

(3/89)

RECEIVED

MAY 09 1991

DIVISION OF
OIL GAS & MINING

Eileen Danni Dey
Signature Eileen Danni Dey

Regulatory Analyst 2-19-91
Title Date

Phone No. (303) 573-4476

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other	5. Lease Designation and Serial No. UTU-01393D
2. Name of Operator Coastal Oil & Gas Corporation	6. If Indian, Allottee or Tribe Name N/A
3. Address and Telephone No. P. O. Box 749, Denver, Colorado 80201-0749 (303) 573-4476	7. If Unit or CA, Agreement Designation Natural Buttes Unit
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 767' FSL & 526' FWL (SWSW) Section 5, T10S-R21E	8. Well Name and No. NBU #114
	9. API Well No. 43-047-31923
	10. Field and Pool, or Exploratory Area Natural Buttes
	11. County or Parish, State Uintah County, Utah

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Abandonment
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input checked="" type="checkbox"/> Other <u>Report of Operations</u>
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Please see the attached chronological report for the drilling operations on the above-referenced well.

RECEIVED

MAY 10 1991

DIVISION OF
OIL GAS & MINING

14. I hereby certify that the foregoing is true and correct

Signed *Patricia Ann Day* Title Regulatory Analyst Date 5/7/91

(This space for Federal or State office use)

Approved by _____ Title _____ Date _____

Conditions of approval, if any: _____

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

COASTAL OIL & GAS CORPORATION
CHRONOLOGICAL HISTORY

NBU #114
NATURAL BUTTES UNIT
UINTAH COUNTY, UTAH
COASTALDRIL #1
WI: 100% COGC AFE: 12931
ATD: 6070' (WASATCH) SD: 2/24/91
CSG: 5-1/2" @ 6090'
DHC(M\$): 131.7

SW/SW SECTION 5-T10S-R21E

- 2/13/91 250' GL WORT. Drld w/Leon Ross Air Drlg on 2/11/91 to 260' w/12-1/4" hole. Ran 247.51', 8-5/8", 24#, K-55 ST&C. Set at 249', FC @ 205'. Cmt'd w/Western: 180 sx "G", 2% CaCl₂, 1/4#/sk Cellofill. Displace w/FW. Bump plug to 800 psi. Circ 13 bbls cmt to surf. Float held. SI csg w/400#. CC: \$12,235.
- 2/14-91 WORT. Will spud Sat., 2/23/91.
2/22/91
- 2/23/91 250' RURT. MI CoastalDril Rig 1. Will spud tonight. CC: \$19,777.
- 2/24/91 460' Drlg 198'/3 hrs. RURT. Test BOPE to 2000 psi, Hydril and csg to 1500 psi - OK. PU BHA. Drill cmt, FC & FS. Spud @ 3:00 a.m., 2/24/91. Drlg w/air mist. 1700 CFM. CC: \$47,193.
- 2/25/91 2000' Drlg 1540'/21 hrs. Drlg, svys, drlg. RR - hydromatic clutch. Drlg w/air mist. 1400 SCFM, 300 psi. SVYS: 1/2 deg @ 484'; 3/4 deg @ 1004'; 1 deg @ 1509'. CC: \$70,387.
- 2/26/91 2975' Drlg 975'/14.5 hrs. Drlg, svys. Work on rental booster. Drlg, RS, check BOP. Drlg, work on rental booster. Drlg, TFNB, unload hole. Ream 60' to btm. Drlg w/air m,ist. SVYS: 1 deg @ 2017'; 1-1/4 deg @ 2493'. AIR 1400 SCFM, 400 psi. CC: \$81,806.
- 2/27/91 3700' Drlg 725'/15.5 hrs. Drlg, mist. Unload hole, bit plugged. TF plugged bit, check BOP, SH in nizzle. TIH, ream 30', 10' fill. Drlg, aerated wtr. RS, drlg. Chg rot hd rubber. Drlg, svy, drlg w/aerated wtr. SVY: 2 deg @ 3501'. MW 8.3, PH 10.5, AIR 1400 CFM. CC: \$96,323.
- 2/28/91 4650' Drlg 950'/23 hrs. Drlg, RS, svy: 2-1/4 deg @ 4130'. Drlg w/aerated wtr. pH 11.5, AIR 700 CFM. CC: \$104,089.
- 3/1/91 5442' Drlg 792'/23 hrs. Drlg, RS, drlg, weld brake drum on drillers side. Drlg w/aerated wtr. MW 8.3, pH 11, AIR 1400 CFM. CC: \$111,368.
- 3/2/91 6090' Short trip 30 stds. 648'/21-3/4 hrs. Drlg, RS, drlg, circ, short trip. Drlg brk from 6003-6027'. Drlg w/aerated wtr. MW 8.3, pH 11.0. C: \$118,257.
- 3/3/91 6090' LD DP Short trip 30 stds circ. Displ w/10# brine. Lost circ, short trip 12 stds. TOH for logs. SLM, no corr. RU Howco and log open hole. Ran DL & GR 6038' to surf. DSN/CDL from 6038' to 2700'. Cal log from 6038' to surf. Logger's TD @ 6038'. TIH, 60' of fill. Wash and ream 60' to btm. LD DP. Drlg w/wtr. MW 8.3, pH 11.0. CC: \$137,246.
- 3/4/91 6090' RDRT. LD DP, RU csg tools. Run 141 jts (6094.38') 5-1/2", 17#, J-55 LT&C new csg. Set @ 6090', FC @ 6055'. Circ, cmt w/Howco. 10 bbls FW, 48 bbls FloCheck 21, 10 bbls FW. mix and pump 400 sx Silicalite, 3#/sk Capseal, .3% Halad-413, 1/4#/sk Floseal, 735 sx "G", 1#/sk Cap, 0.3% Halad 4, 0.2% Super CBL, 140.5 bbls FW; 65 sx (30 bbls cmt to surf. Bump plug w/3000 psi, floats held. Cmt in place @ 3:30 p.m., 3/3/91. ND BOPE, set csg slips w/100M#. Cut off csg. RR 7:30 p.m., 3/3/91. CC: \$225,551. FINAL DRILLING REPORT.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

5. Lease Designation and Serial No.
UTU-01393D

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or C.A. Agreement Designation

Natural Buttes Unit

8. Well Name and No.

NBU #114

9. API Well No.

43-047-31923

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah County, Utah

SUBMIT IN TRIPLICATE

1. Type of well
 Oil Well Gas Well Other

2. Name of Operator
 Coastal Oil & Gas Corporation

3. Address and Telephone No.
 P. O. Box 749, Denver, Colorado 80201-0749 (303) 573-4476

4. Location of well (Footage, Sec., T., R., M., or Survey Description)
 767' FSL & 526' FWL
 Section 5, T10S-R21E

CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- Notice of Intent
- Subsequent Report
- Final Abandonment Notice

TYPE OF ACTION

- Abandonment
- Recompletion
- Plugging Back
- Casing Repair
- Altering Casing
- Other Pipeline R-O-W
- Change of Plans
- New Construction
- Non-Routine Fracturing
- Water Shut-Off
- Conversion to Injection
- Dispose Water

(Note: Report results of multiple completions on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Coastal Oil & Gas Corporation requests a right-of-way to install a 4" gas pipeline from the NBU #114 gas well and tie into the existing gas pipeline at CIGE #7 well location. This right-of-way will be located in Sections 5 & 8, T10S-R21E within lease #U-01393D and #U-01791 and within the Natural Buttes Unit boundaries. Coastal requests a 30' width easement with a total slope distance of + 1500'. There will be minimum surface disturbance as the pipeline will be laid on the surface. Please see the attached topographic map which illustrates this proposed right-of-way.

RECEIVED
 AUG 22 1991
 ACCEPTED BY THE STATE
 COMMISSION OF
 OIL, GAS AND MINING
 DIVISION OF
 OIL GAS & MINING 8-26-91
 BY: *[Signature]*

14. I hereby certify that the foregoing is true and correct

Signed

[Signature]
 (This space for Federal or state office use)

Title

Regulatory Analyst

Date


8/20/91

Approved by

Conditions of approval, if any:

Title

Date

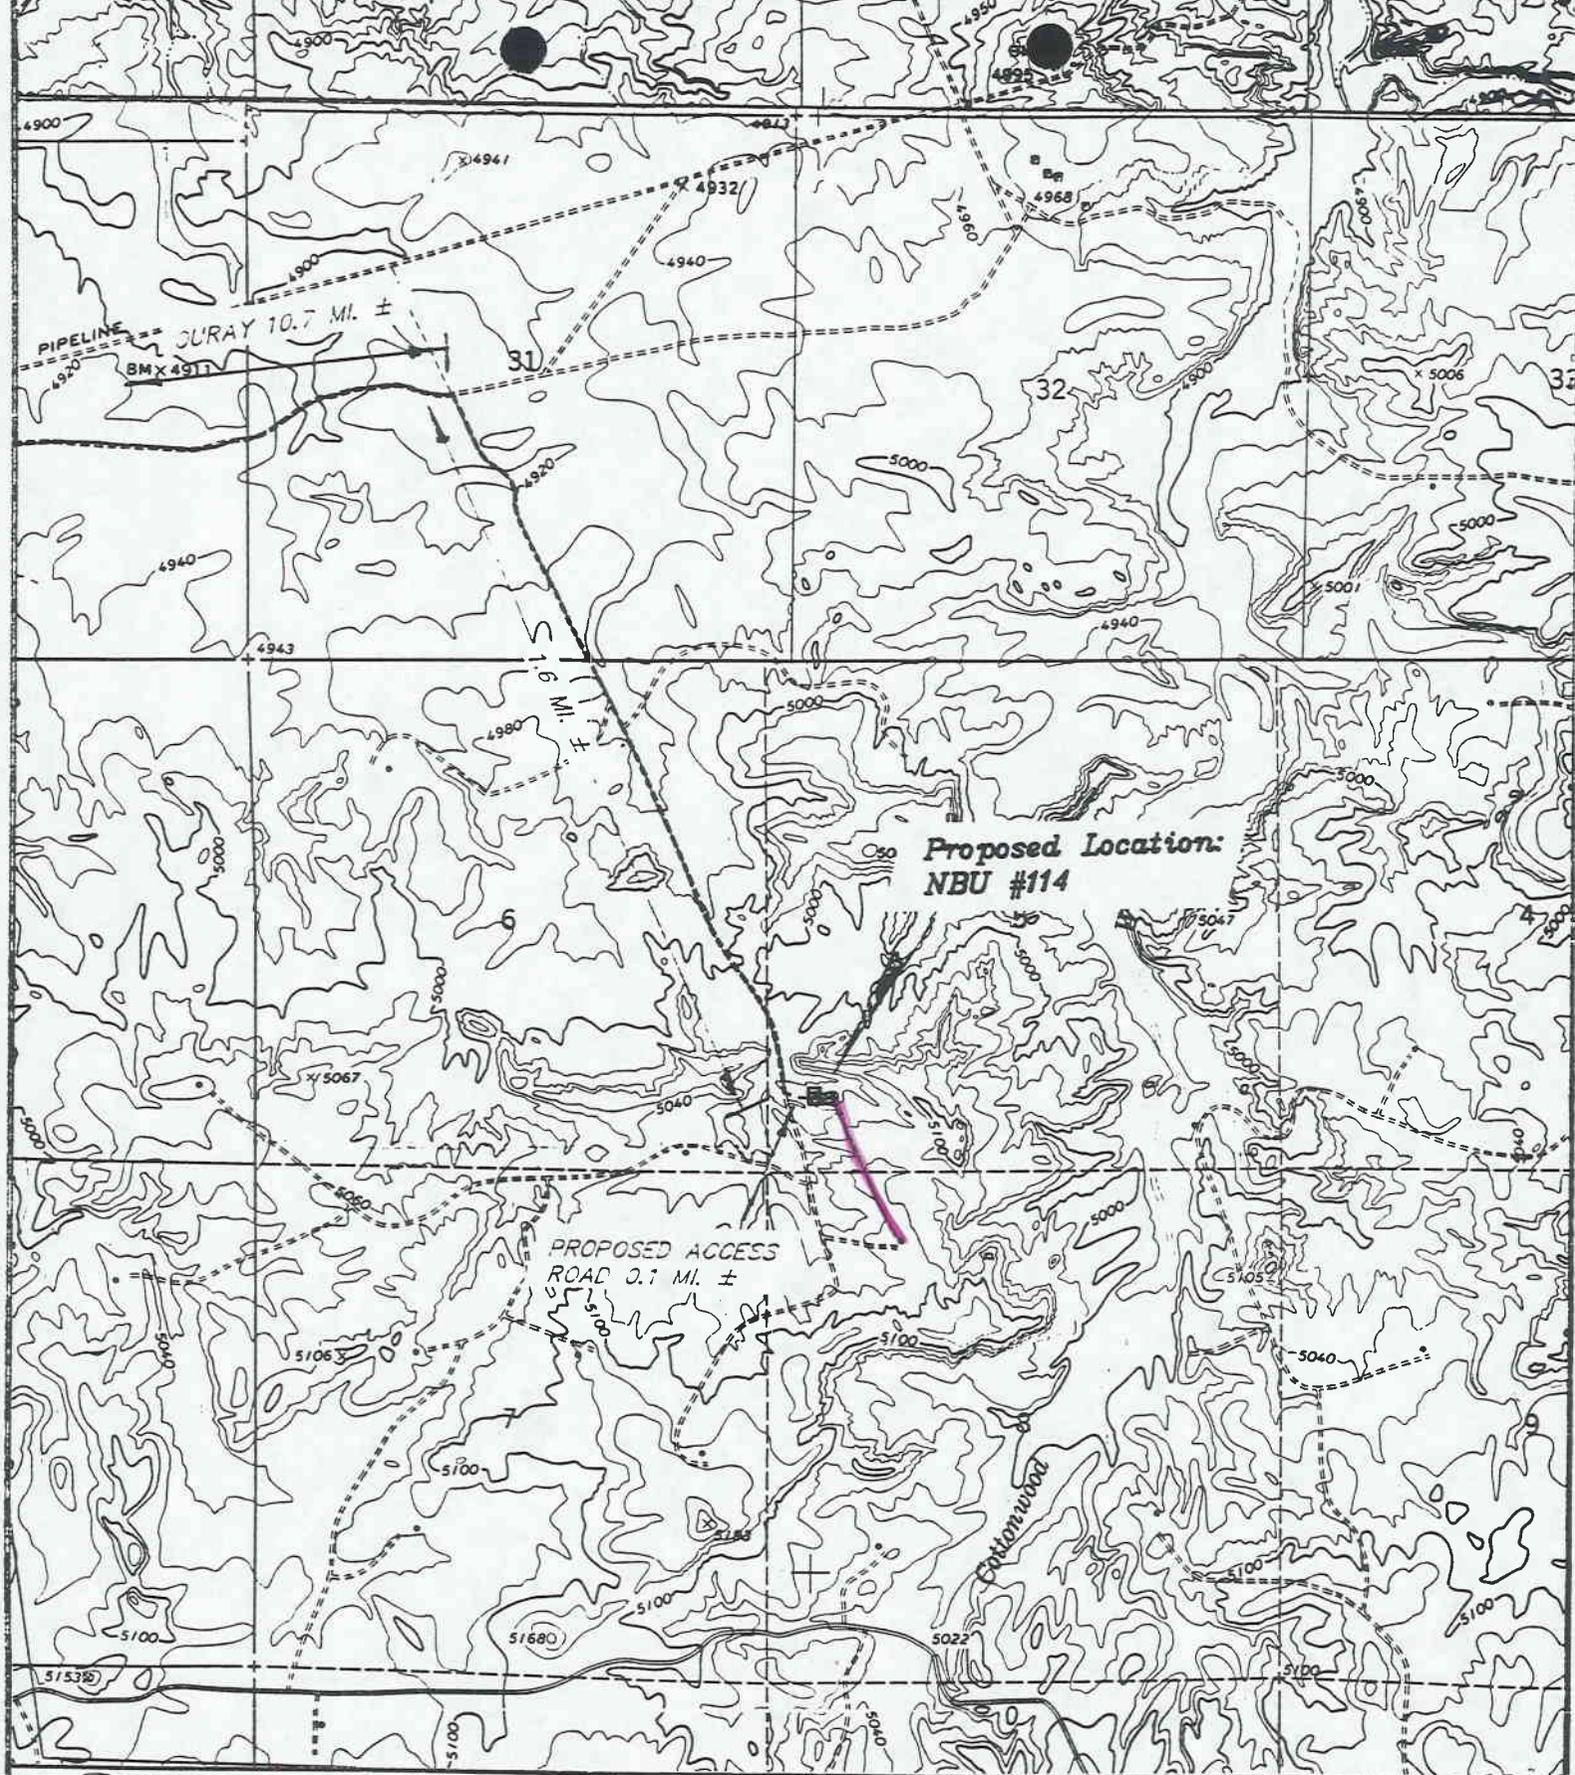

PROPOSED PIPELINE R-O-W —

**TOPOGRAPHIC
MAP "B"**

SCALE: 1" = 2000'
DATE 3-30-90



COASTAL OIL & GAS CORP.

NBU #114
SECTION 5, T10S, R21E, S.L.B.&M.
SEC. 5 = LEASE # U-01393D
SEC. 8 = LEASE # U-01791

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN DUPLICATE

(See other instructions on reverse side)

Form approved.
Budget Bureau No. 1004-0137
Expires August 31, 1985

WELL COMPLETION OR RECOMPLETION REPORT AND LOG *

1a. TYPE OF WELL: OIL WELL GAS WELL DRY Other _____

b. TYPE OF COMPLETION:
NEW WELL WORK OVER DEEP-EN PIG BACK DIFF. RENVR. Other _____

2. NAME OF OPERATOR
Coastal Oil & Gas Corporation

3. ADDRESS OF OPERATOR
P. O. Box 749, Denver, Colorado 80201-0749

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements):
At surface 767' FSL & 526' FWL (SWSW)
At top prod. interval reported below Same as above
At total depth Same as above

RECEIVED
SEP 09 1991

DIVISION OF
OIL GAS & MINING

14. PERMIT NO. 43-047-31923
DATE ISSUED 12/27/90

5. LEASE DESIGNATION AND SERIAL NO.

UTU-01393D

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

N/A

7. UNIT AGREEMENT NAME

Natural Buttes Unit

8. FARM OR LEASE NAME

NBU

9. WELL NO.

#114

10. FIELD AND POOL, OR WILDCAT

Natural Buttes

11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA

Section 5, T10S-R21E

12. COUNTY OR PARISH

Uintah

13. STATE

Utah

15. DATE SPUNDED 2/11/91
16. DATE T.D. REACHED 3/1/91
17. DATE COMPL. (Ready to prod.) 7/30/91
18. ELEVATIONS (DF. RKB, RT, GR, ETC.)* 5046' GL, 5058' KB
19. ELEV. CASINGHEAD

20. TOTAL DEPTH, MD & TVD 6090'
21. PLUG. BACK T.D., MD & TVD 6021'
22. IF MULTIPLE COMPL., HOW MANY*
23. INTERVALS DRILLED BY SFC-TD
ROTARY TOOLS
CABLE TOOLS

24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)*
5021-5875' (Wasatch)
25. WAS DIRECTIONAL SURVEY MADE NO

26. TYPE ELECTRIC AND OTHER LOGS RUN
CDL/DSN, DLL, CCL-GR 4-4-91
27. WAS WELL CORED NO

28. CASING RECORD (Report all strings set in well)

CASING SIZE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
8-5/8"	24#	262'	12-1/4"	180 sx Cl "G" + additives	NONE
5-1/2"	17#	6,090'	7-7/8"	1135 sx Silicalite + "G"	NONE

29. LINER RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)

30. TUBING RECORD

SIZE	DEPTH SET (MD)	PACKER SET (MD)

31. PERFORATION RECORD (Interval, size and number)
Perforate w/4" csg. gun @ following depths:
5021' 5608' 5761' 5861'
5023' 5616' 5770' 5864'
5596' 5619' 5774' 5867'
5600' 5622' 5777' 5875'
5606' 5626' 5780'

32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
5021-5875'	4000 gals 3% KCL wtr + 38 B.S.
5021-5875'	88620 gals 3% KCL gel, 282,000# sand, 150 tons CO ₂ (30% CO ₂)

33.* PRODUCTION

DATE FIRST PRODUCTION	PRODUCTION METHOD (Flowing, gas lift, pumping—size and type of pump)	WELL STATUS (Producing or shut-in)					
7/29/91	Flowing	SI					
DATE OF TEST	HOURS TESTED	CHOKED SIZE	PROD'N. FOR TEST PERIOD	OIL—BBL.	GAS—MCF.	WATER—BBL.	GAS-OIL RATIO
7/30/91	24	20/64"	→	0	900	15	N/A
FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE	OIL—BBL.	GAS—MCF.	WATER—BBL.	OIL GRAVITY-API (CORR.)	
450	525	→	0	900	15	N/A	

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)
SIWOPLC
TEST WITNESSED BY
H. Ivie

35. LIST OF ATTACHMENTS
Chronological History

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED Eileen Damm TITLE Regulatory Analyst DATE 9/4/91

*(See Instructions and Spaces for Additional Data on Reverse Side)

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals; and all drill-stem, tests, including depth interval tested, cushion used, flowing and shut-in pressures, and recoveries);

38. GEOLOGIC MARKERS

FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	NAME	TOP	
					MEAS. DEPTH	TRUE VERT. DEPTH
				Wasatch Fm.	4715'	4715'

COASTAL OIL & GAS CORPORATION
CHRONOLOGICAL HISTORY

NBU #114
NATURAL BUTTES UNIT
UINTAH COUNTY, UTAH
COASTALDRIL #1
WI: 100% COGC AFE: 12931
ATD: 6070' (WASATCH) SD: 2/24/91
CSG: 5-1/2" @ 6090'
DHC(M\$): 131.7

SW/SW SECTION 5-T10S-R21E

- 2/13/91 250' GL WORT. Drld w/Leon Ross Air Drlg on 2/11/91 to 260' w/12-1/4" hole. Ran 247.51', 8-5/8", 24#, K-55 ST&C. Set at 249', FC @ 205'. Cmt'd w/Western: 180 sx "G", 2% CaCl₂, 1/4#/sk Cellofill. Displace w/FW. Bump plug to 800 psi. Circ 13 bbls cmt to surf. Float held. SI csg w/400#. CC: \$12,235.
- 2/14-91 WORT. Will spud Sat., 2/23/91.
2/22/91
- 2/23/91 250' RURT. MI CoastalDril Rig 1. Will spud tonight. CC: \$19,777.
- 2/24/91 460' Drlg 198'/3 hrs. RURT. Test BOPE to 2000 psi, Hydril and csg to 1500 psi - OK. PU BHA. Drill cmt, FC & FS. Spud @ 3:00 a.m., 2/24/91. Drlg w/air mist. 1700 CFM. CC: \$47,193.
- 2/25/91 2000' Drlg 1540'/21 hrs. Drlg, svys, drlg. RR - hydromatic clutch. Drlg w/air mist. 1400 SCFM, 300 psi. SVYS: 1/2 deg @ 484'; 3/4 deg @ 1004'; 1 deg @ 1509'. CC: \$70,387.
- 2/26/91 2975' Drlg 975'/14.5 hrs. Drlg, svys. Work on rental booster. Drlg, RS, check BOP. Drlg, work on rental booster. Drlg, TFNB, unload hole. Ream 60' to btm. Drlg w/air m,ist. SVYS: 1 deg @ 2017'; 1-1/4 deg @ 2493'. AIR 1400 SCFM, 400 psi. CC: \$81,806.
- 2/27/91 3700' Drlg 725'/15.5 hrs. Drlg, mist. Unload hole, bit plugged. TF plugged bit, check BOP, SH in nizzle. TIH, ream 30', 10' fill. Drlg, aerated wtr. RS, drlg. Chg rot hd rubber. Drlg, svy, drlg w/aerated wtr. SVY: 2 deg @ 3501'. MW 8.3, PH 10.5, AIR 1400 CFM. CC: \$96,323.
- 2/28/91 4650' Drlg 950'/23 hrs. Drlg, RS, svy: 2-1/4 deg @ 4130'. Drlg w/aerated wtr. pH 11.5, AIR 700 CFM. CC: \$104,089.
- 3/1/91 5442' Drlg 792'/23 hrs. Drlg, RS, drlg, weld brake drum on drillers side. Drlg w/aerated wtr. MW 8.3, pH 11, AIR 1400 CFM. CC: \$111,368.
- 3/2/91 6090' Short trip 30 stds. 648'/21-3/4 hrs. Drlg, RS, drlg, circ, short trip. Drlg brk from 6003-6027'. Drlg w/aerated wtr. MW 8.3, pH 11.0. C: \$118,257.
- 3/3/91 6090' LD DP Short trip 30 stds circ. Displ w/10# brine. Lost circ, short trip 12 stds. TOH for logs. SLM, no corr. RU Howco and log open hole. Ran DL & GR 6038' to surf. DSN/CDL from 6038' to 2700'. Cal log from 6038' to surf. Logger's TD @ 6038'. TIH, 60' of fill. Wash and ream 60' to btm. LD DP. Drlg w/wtr. MW 8.3, pH 11.0. CC: \$137,246.
- 3/4/91 6090' RDRT. LD DP, RU csg tools. Run 141 jts (6094.38') 5-1/2", 17#, J-55 LT&C new csg. Set @ 6090', FC @ 6055'. Circ, cmt w/Howco. 10 bbls FW, 48 bbls FloCheck 21, 10 bbls FW. mix and pump 400 sx Silicalite, 3#/sk Capseal, .3% Halad-413, 1/4#/sk Floseal, 735 sx "G", 1#/sk Cap, 0.3% Halad 4, 0.2% Super CBL, 140.5 bbls FW; 65 sx (30 bbls cmt to surf. Bump plug w/3000 psi, floats held. Cmt in place @ 3:30 p.m., 3/3/91. ND BOPE, set csg slips w/100M#. Cut off csg. RR 7:30 p.m., 3/3/91. CC: \$225,551. FINAL DRILLING REPORT.

THE COASTAL CORPORATION
PRODUCTION REPORT

CHRONOLOGICAL HISTORY

Page 2

NBU #114
SW/SW SECTION 5-T10S-R21E
NATURAL BUTTES UNIT
UINTAH COUNTY, UTAH
WI: 100% COGC AFE: 12931
TD: 6090'
SD: 2/24/91
CSG: 5-1/2" @ 6090'
CWC(M\$): \$358.8

- 3/6/91 Circ csg. MIRU Welltech rig #247. PU 4-3/4" bit. RIH w/bit and 2-3/8" tbg. Tag PBTB @ 6071'.
DC: \$5,210 TC: \$230,761
- 3/7/91 Prep to breakdown. Circ 5-1/2" csg w/3% KCl wtr. RU Cutters. Found PBTB @ 6021' WLM. Run CCL-GR from PBTB to 4000'. Did not run CBL. Test csg to 5000 psi. Held OK. Perf 19 holes from 5021' to 5875' w/4" csg guns. RD Cutters. TIH w/2-3/8" tbg, tbg hanger, blast joint, 160 jts 2-3/8" tbg, SN, 1 jt tbg, notched collar. Tbg set @ 4880'. ND BOP's. NU WH.
DC: \$42,725 TC: \$273,486
- 3/8/91 Prep to breakdown. MIRU Smith Energy. Test surface lines to 5000 psi. Breakdown perfs. Pump 3 bbls of 3% KCl. Pressure up to 5000 psi. Bleed off pressure. Pumped 2 bbls of 3% KCl. Pressured up to 5000 psi. Rig down Smith. POOH w/tbg. MIRU OWP. Reperf 19 holes w/4" csg gun. TIH w/tbg.
DC: \$5,471 TC: \$278,957
- 3/9/91 Prep to swab. Rig up Smith Energy. Pressure test surface to 5000 psi, test OK. Pump 3 bbls KCl water. Pressured up to 5000 psi. Held pressure for 15 minutes then perfs broke. Broke down perfs w/100 bbls 3% KCl and 80 ball sealers. Balled off perforations. AIR 7 BPM, AIP 4700 psi, ISIP 1750 psi. RD Smith. Flow to pit. Well died in 10 min. Rig up swab. Recovered 132 bbls in 23 runs. FL @ 4000'.
DC: \$6,611 TC: \$285,568
- 3/10/91 Swabbing. SICP 540 psi, SITP 620 psi. Open to pit, Flow for 5 min then died. Swab 13 runs, recover 46 bbls, FL 4500'. LTR 103 bbls.
DC: \$1,505 TC: \$287,073
- 3/11/91 Swabbing. SICP 700 psi, SITP 900 psi. Open to pit. Flow for 5 min then died. Swab 8 runs. Recovered 30 bbls. FL @ 4500' (seating nipple). LTR 73 bbls.
DC: \$1,308 TC: \$288,381
- 3/12/91 Shut-in, bldg pressure. Swab 5 runs. Recover 12 BF. LTR = 59 bbls. Very little in flow. Shut well in at 3:25 p.m., 3/11/91, for pressure buildup.
DC: \$1,275 TC: \$289,656
- 3/13/91 SITP 950 psi.
3/14/91 No report.
3/15/91 SITP 1275 psi.
3/16/91 SITP 1281 psi.
3/17/91 SITP 1389 psi.
3/18/91 SITP 1381 psi.
3/19/91 SITP 1363 psi, gauge is malfunctioning.
3/20/91 SITP 1356 psi.
3/21/91 SITP 1353 psi.
3/22/91 SITP 1349 psi.
3/23/91 SITP 1346 psi, put pressure recorder on csg.
3/24/91 SICP 1342 psi.
3/25/91 SICP 1340 psi.
3/26/91 SICP 1339 psi, remove recorder at 12:35 p.m., 3/25/91.
3/27/91 SI waiting on frac. Drop from report until further activity.

THE COASTAL CORPORATION
PRODUCTION REPORT

CHRONOLOGICAL HISTORY

Page 3

NBU #114
SW/SW SECTION 5-T10S-R21E
NATURAL BUTTES UNIT
UINTAH COUNTY, UTAH
WI: 100% COGC AFE: 12931

7/27/91 Flow back after frac. RU Western. Frac Wasatch w/88,620 gals 3% KCl gel, 282,000 lbs sand, 150 tons CO₂ (30% CO₂). AIR 39 BPM, AIP 4500 psi, ISIP 2200 psi, 15 min 2000 psi. SI 5 hrs.
DC: \$95,600 TC: \$385,256

7/28/91 Flowing 2.3 MMCFD CO₂, FTP 425 psi, CP 750 psi, 20/64" choke, 12 BWP.

7/29/91 Flowing 1 MMCFD CO₂, FTP 425 psi, CP 750 psi, 20/64" choke, 12 BWP.

7/30/91 Flowing 700 MCFD, FTP 400 psi, CP 550 psi, 20/64" choke, 15 BWP.
Gas will burn.

7/31/91 Flowing 900 MCFD, FTP 450 psi, CP 525 psi, 20/64" choke, 15 BWP.

8/1/91 Flowing 900 MCFD, FTP 380 psi, CP 500 psi, 20/64" choke, 10 BWP.

8/2/91 Flowing 800 MCFD, FTP 380 psi, CP 500 psi, 20/64" choke, 10 BWP.

8/3/91 SI waiting on connection. Drop from report until further activity.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

5. Lease Designation and Serial No.

UTU-01393D

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or L.A. Agreement Designation

Natural Buttes Unit

8. Well Name and No.

NBU #114

9. API Well No.

43-047-31923

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah County, Utah

SUBMIT IN TRIPLICATE

Type of well

Oil Well Gas Well Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No.

P. O. Box 749 Denver, CO 80201-0749 (303) 573-4476

4. Location of well (Footage, Sec., T., R., M., or Survey Description)

767' FSL & 526' FWL (SW/SW)
Section 5, T10S-R21E

CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- Notice of Intent
- Subsequent Report
- Final Abandonment Notice

TYPE OF ACTION

- Abandonment
- Recommission
- Plugging Back
- Casing Repair
- Altering Casing
- Other Frac Treatment
- Change of Plan
- New Construction
- Non-Routine Fracturing
- Water Shut-Off
- Conversion to Injection
- Dispose Water

(Note: Report returns of multistage completion well Completion or Recommission Report and Log form.)

13. Describe proposed or completed operations (Clearly state all pertinent details, and give pertinent date, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measures and true vertical depth for all markers and zones pertinent to this work.)

Please see the attached chronological history for the fracture treatment performed on the above referenced well.

RECEIVED

OCT 15 1991

DIVISION OF
OIL GAS & MINING

14. I hereby certify that the foregoing is true and correct

Signed [Signature] Title Regulatory Analyst

Date 10/10/91

(This space for Federal or State office use)

Approved by _____ Title _____ Date _____
Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and unlawfully to claim to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

THE COASTAL CORPORATION
PRODUCTION REPORT

CHRONOLOGICAL HISTORY

NBU #114
SW/SW SECTION 5-T10S-R21E
NATURAL BUTTES UNIT
UINTAH COUNTY, UTAH
WI: 100% COGC AFE: 12931

Page 3

- 7/27/91 Flow back after frac. RU Western. Frac Wasatch w/88,620 gals 3% KCl gel, 282,000 lbs sand, 150 tons CO₂ (30% CO₂). AIR 39 BPM, AIP 4500 psi, ISIP 2200 psi, 15 min 2000 psi. SI 5 hrs.
DC: \$95,600 TC: \$385,256
- 7/28/91 Flowing 2.3 MMCFD CO₂, FTP 425 psi, CP 750 psi, 20/64" choke, 12 BWP.
- 7/29/91 Flowing 1 MMCFD CO₂, FTP 425 psi, CP 750 psi, 20/64" choke, 12 BWP.
- 7/30/91 Flowing 700 MCFD, FTP 400 psi, CP 550 psi, 20/64" choke, 15 BWP.
Gas will burn.
- 7/31/91 Flowing 900 MCFD, FTP 450 psi, CP 525 psi, 20/64" choke, 15 BWP.
- 8/1/91 Flowing 900 MCFD, FTP 380 psi, CP 500 psi, 20/64" choke, 10 BWP.
- 8/2/91 Flowing 800 MCFD, FTP 380 psi, CP 500 psi, 20/64" choke, 10 BWP.
- 8/3/91 SI waiting on connection. Drop from report until further activity.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

5. Lease Identification and Serial No.

UTU-01393D

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or LA Agreement Description

Natural Buttes Unit

8. Well Name and No.

NBU #114

9. API Well No.

43-047-31923

10. Field and Pool, or Expansive Area

Natural Buttes

11. County or Parish, State

Uintah County, Utah

SUBMIT IN TRIPLICATE

Type of well

Oil Well Gas Well Other

Name of Operator

Coastal Oil & Gas Corporation

Address and Telephone No.

P. O. Box 749 Denver, CO 80201-0749 (303) 573-4476

Location of well (Footage, sec., T., R., M., or Survey Description)

767' FSL & 526' FWL (SW/SW)
Section 5, T10S-R21E

CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- Notice of Intent
- Subsequent Report
- Final Abandonment Notice

TYPE OF ACTION

- Abandonment
- Reconnoissance
- Plugging Back
- Casing Repair
- Altering Casing
- Other Report of First Prod. & First Sales
- Change of Plans
- New Construction
- Non-Routine Fracturing
- Water Shut-Off
- Conversion to Injection
- Dispose Water

(Note: Approval of abandonment on Well Completion or Abandonment Report and Log form.)

13. Describe proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is discontinuously drilled, give subsurface locations and measures and true vertical depths for all markers and zones pertinent to this work.)

The above referenced well was connected to CIG's gas sales pipeline and first sales occurred @ 1:00 p.m., 10/17/91, with a rate of 861 MCFD, FTP 1131 psi, SICP 1018 psi on 11/64" choke.

RECEIVED

OCT 23 1991

DIVISION OF
OIL GAS & MINING

14. I hereby certify that the foregoing is true and correct

Signed: Eileen Dennis Day Title: Regulatory Analyst

Date: 10/18/91

This space for Federal or State office use

Approved by _____
Conditions of approval, if any:

Title _____

Date _____

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

APR 17 1992

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

DIVISION OF
SUNDRY NOTICES AND REPORTS ON WELLS OIL GAS & MINING

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No.

P. O. Box 749 Denver, CO 80201-0749 (303) 573-4476

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

See Attached List

5. Lease Designation and Serial No.

See Attached List

6. If Indian, Allottee or Tribe Name

See Attached List

7. If Unit or CA, Agreement Designation

Natural Buttes Unit

8. Well Name and No.

See Attached List

9. API Well No.

See Attached List

10. Field and Pool, or Expiatory Area

Natural Buttes

11. County or Parish, State

Uintah County, Utah

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

Notice of Intent

Abandonment

Change of Plans

Subsequent Report

Recompletion

New Construction

Final Abandonment Notice

Plugging Back

Non-Routine Fracturing

Casing Repair

Water Shut-Off

Altering Casing

Conversion to Injection

Other NTL 2B; IV

Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form 1)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Coastal Oil & Gas Corporation hereby requests permission to dispose of produced water in unlined pits per NTL-2B, IV, for the subject wells.

- 1) These wells are completed in the Wasatch formation and produce less than 5 barrels of water per day on a monthly basis.
- 2) Two unlined pits per location will be used due to the size and layout of the locations: 40' x 40' x 8' and 6' x 6' x 6' deep with berms surrounding them. Each pit will be fenced and will have cement corner posts per BLM specifications. (See the attached typical facilities diagram.)
- 3) The average evaporation rate for the area compensated for annual rainfall is 70" per year.
- 4) The estimated percolation rate based on the soil characteristics under and adjacent to the pits is 2-6" per hour.
- 5) The depth of usable water aquifers in this area is approximately 1500'.

14. I hereby certify that the foregoing is true and correct.

Signed

Title

Regulatory Analyst

4/14/92

(This space for Federal or State office use)

Approved by

Title


Conditions of approval, if any:

**Accepted by the State
of Utah Division of
Oil, Gas and Mining**

Date: 4-29-92

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

COASTAL OIL & GAS CORP.
NATURAL BUTTES UNIT
TYPICAL FACILITIES LAYOUT
NTL-2B; IV

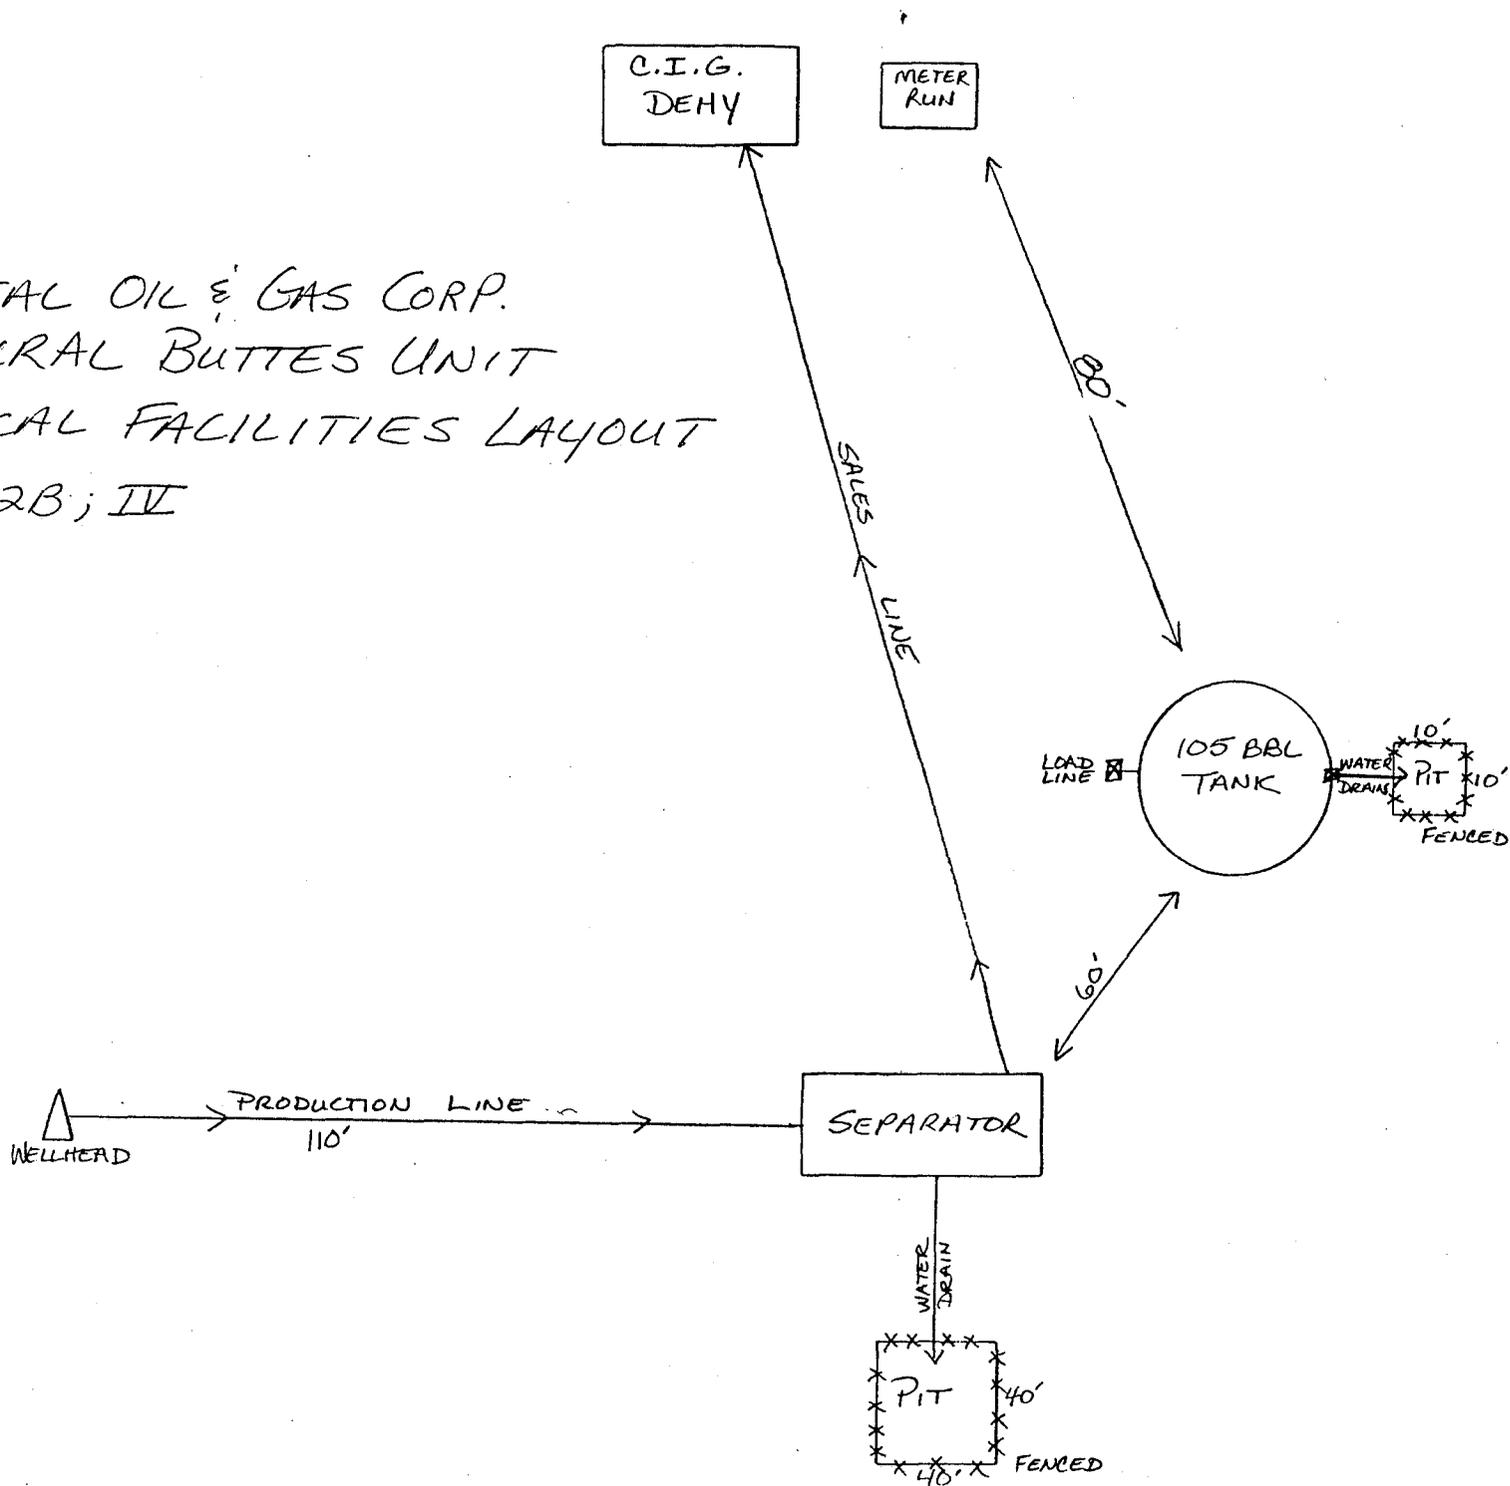

13-Apr-92

NATURAL BUTTES

UINTAH COUNTY, UTAH

WELL #	LOCATION				STATE OR BLM		API NUMBER
	QUAD	SEC	TWP	RGE	LEASE #	SURFACE	
NBU #103	SENW	10	9	21	U-0141315	UTE	43-047-31956
NBU #104	SENE	16	9	21	ST ML-3282	UTE	43-047-31957
NBU #105	SWSW	17	9	21	U-0575	UTE	43-047-31955
NBU #106	NESW	21	9	21	U-0576	UTE	43-047-31946
NBU #107	SENW	26	9	21	ST ML-01194	STATE	43-047-31916
NBU #108	SESE	19	9	22	U-0284	UTE	43-047-31958
NBU #109	SENE	27	9	21	ST U-01194-A	STATE	43-047-31917
NBU #110	NENE	28	9	21	U-0576	FED.	43-047-31924
NBU #111	SWNW	25	9	21	ST U-01194	STATE	43-047-31920
NBU #112	SESE	33	9	22	U-01191	FED.	43-047-31930
NBU #113	SESE	34	9	22	U-0149077	FED.	43-047-31931
NBU #114	SWSW	5	10	21	U-01393-D	FED.	43-047-31923
NBU #115	NENW	10	10	21	U-0149079	FED.	43-047-31929
NBU #116	NWNW	6	10	22	U-464	FED.	43-047-31925
NBU #117	NENE	10	10	22	ST UT-01197-A	STATE	43-047-31914
NBU #118	SENE	22	9	20	U-0577-B	UTE	43-047-31969
NBU #119	SENW	22	9	20	U-0577-B	UTE	43-047-31973
NBU #120	NWNW	10	9	21	U-0141315	UTE	43-047-31972
NBU #121	NWNE	13	9	21	U-01193	UTE	43-047-
NBU #122	SWSE	13	9	21	U-01193	UTE	43-047-32085
NBU #123	NWNW	15	9	21	U-01188	UTE	43-047-31974
NBU #124	NWNE	16	9	21	ST ML-3282	UTE	43-047-31971
NBU #125	NESE	17	9	21	U-0575	UTE	43-047-32090
NBU #126	NENW	21	9	21	U-0576	UTE	43-047-31962
NBU #127	SWNW	21	9	21	U-0576	UTE	43-047-31963
NBU #128	SWSW	21	9	21	U-0576	UTE	43-047-31964
NBU #129	SENE	22	9	21	U-010950-A	UTE	43-047-31965
NBU #130	SWNW	22	9	21	U-0147566	UTE	43-047-31967
NBU #131	NWSW	23	9	21	U-0149075	UTE	43-047-31966
NBU #132	NWNW	26	9	21	ST U-01194	STATE	43-047-31938
NBU #133	SWNE	28	9	21	U-0576	FED.	43-047-31950
NBU #134	SWSW	28	9	21	U-0576	FED.	43-047-32011
NBU #135	NESE	18	9	22	U-461	UTE	43-047-32089
NBU #136	SWSE	19	9	22	U-0284	UTE	43-047-31968
NBU #137	SESE	30	9	22	ST ML-22935	STATE	43-047-31939
NBU #138A	SENE	33	9	22	U-01191-A	FED.	43-047-32151
NBU #139	SWNE	14	10	21	U-465	FED.	43-047-31948
NBU #140	NWNE	5	10	22	U-01191A	FED.	43-047-31947
NBU #141	SENW	6	10	22	U-464	FED.	43-047-32017
NBU #142	NESE	10	10	22	U-025187	FED.	43-047-32013
NBU #143	NWNE	10	9	21	U-0141315	UTE	43-047-32088
NBU #144	NWNW	23	9	21	U-0149075	UTE	43-047-32044
NBU #145	NWNE	27	9	21	ST U-01194-A	STATE	43-047-31976
NBU #146	SWNW	14	10	21	U-465	FED.	43-047-31985
NBU #147	NWSW	4	10	22	U-01191	FED.	43-047-31984
NBU #148	SESW	4	10	22	U-01191	FED.	43-047-31983
NBU #149	NESE	5	10	22	U-01191	FED.	43-047-31982
NBU #150	SENW	9	10	22	U-01196-B	FED.	43-047-31992
NBU #151	NWNW	9	10	22	U-01196-B	FED.	43-047-31991
NBU #152	SESE	9	10	22	U-01196-D	FED.	43-047-31990
NBU #153	SWNW	11	10	22	ST U-01197-A	STATE	43-047-31975
NBU #154	NWSE	26	9	21	ST ML-22934	STATE	43-047-32003
NBU #155	SENW	31	9	22	ST ML-23607	STATE	43-047-32004
NBU #156	SWNW	35	9	21	ST U-01194	STATE	43-047-32005
NBU #157	SESW	32	9	22	ST ML-22649	STATE	43-047-32007
NBU #158	NWSE	27	9	21	ST U-01194-A	STATE	43-047-31997
NBU #159	NESW	35	9	21	ST U-01194	STATE	43-047-31996
NBU #160	SESW	31	9	22	ST ML-22935-A	STATE	43-047-32006
NBU #161	SESE	32	9	22	ST ML-22649	STATE	43-047-32023
NBU #162	SENW	12	10	20	U-4478	FED.	43-047-32066
NBU #163	NENW	14	10	21	U-465	FED.	43-047-32069
NBU #164	NWSE	3	10	22	U-01191-A	FED.	43-047-32055
NBU #165	NENW	3	10	22	U-01191	FED.	43-047-32057
NBU #166	SWSE	28	9	21	U-0576	FED.	43-047-32065
NBU #167	SESW	25	9	21	ST U-01194	STATE	43-047-32054
NBU #168	NWSW	12	10	20	U-4478	FED.	43-047-32117
NBU #169	SESW	12	10	20	U-4478	FED.	43-047-32118

13-Apr-92

NATURAL BUTTES UINTAH COUNTY, UTAH

WELL #	LOCATION			RGE	STATE OR BLM		API NUMBER
	QUAD	SEC	TWP		LEASE #	SURFACE	
NBU #170	NWNW	4	10	22	U-01191-A	FED.	43-047-32169
NBU #171	SENE	5	10	22	U-01191-A	FED.	43-047-32115
NBU #172	NENE	19	9	22	U-0284	UTE	43-047-32194
NBU #173	NWNE	33	9	22	U-01191-A	FED.	43-047-32116
NBU #174	NWNW	11	9	21	U-0141315	UTE	43-047-32193
NBU #175	NENW	28	9	21	U-0576	FED.	43-047-32143
NBU #176	SWNW	28	9	21	U-0576	FED.	43-047-32144
NBU #177	NESE	29	9	21	U-0581	FED.	43-047-32112
NBU #178	NWNE	30	9	21	U-0581	FED.	43-047-32121
NBU #179	SWSW	10	10	21	U-01416-A	FED.	43-047-32145
NBU #180	SWSE	10	10	22	U-025187	FED.	43-047-32113
NBU #181	SESW	9	9	21	U-0576	UTE	43-047-32161
NBU #182	SENW	11	9	21	U-0141315	UTE	43-047-32162
NBU #183	SWNW	27	9	21	ST U-01194-A	STATE	43-047-32122
NBU #184	SESW	30	9	22	U-463	FED.	43-047-32170
NBU #185	SWNE	3	10	22	U-01191-A	FED.	43-047-32171
NBU #186	SENE	30	9	22	U-463	FED.	43-047-
NBU #187	SESW	34	9	22	U-0149077	FED.	43-047-
NBU #188	SWSW	10	10	22	U-01196-C	FED.	43-047-
NBU #189	SESW	23	9	21	U-0149075	UTE	43-047-
NBU #190	NWNE	26	9	21	ST U-01194	STATE	43-047-
CIGE 110-7-9-21	SWSE	7	9	21	U-0575-B	UTE	43-047-31959
CIGE 111-13-9-21	SESW	13	9	21	U-01193	UTE	43-047-31954
CIGE 112-19-9-21	SESE	19	9	21	U-0581	UTE	43-047-31945
CIGE 113-21-9-21	SWNE	21	9	21	U-0576	UTE	43-047-31944
CIGE 114-34-9-21	NESE	34	9	21	ST U-01194-A	STATE	43-047-31915
CIGE 115-35-9-21	NWNE	35	9	21	ST ML-22582	STATE	43-047-31918
CIGE 116-29-9-22	NWSW	29	9	22	ST ML-22935	STATE	43-047-31919
CIGE 117-34-9-22	SWNW	34	9	22	U-0149077	FED.	43-047-31928
CIGE 118-35-9-22	NESE	35	9	22	U-010954A	FED.	43-047-32025
CIGE 119-15-10-21	NENE	15	10	21	U-01416-A	FED.	43-047-31927
CIGE 120-15-9-20	SENE	15	9	20	U-0144868	UTE	43-047-32032
CIGE 121-15-9-20	NWNE	15	9	20	U-0144868	UTE	43-047-32031
CIGE 122-7-9-21	NENE	7	9	21	U-0149767	UTE	43-047-32098
CIGE 123-7-9-21	SWNE	7	9	21	U-0575-B	UTE	43-047-32047
CIGE 124-9-9-21	NWSE	9	9	21	U-01188	UTE	43-047-32045
CIGE 125-13-9-21	NWNW	13	9	21	U-01193	UTE	43-047-32084
CIGE 126-13-9-21	NWSW	13	9	21	U-01193	UTE	43-047-32087
CIGE 127-16-9-21	NESW	16	9	21	ST ML-3141	UTE	43-047-32036
CIGE 128-18-9-21	NENE	18	9	21	U-0575	UTE	43-047-32046
CIGE 129-18-9-21	NENW	18	9	21	U-0581	UTE	43-047-32043
CIGE 130-19-9-21	NENE	19	9	21	U-0581	UTE	43-047-32030
CIGE 131-19-9-21	SWNE	19	9	21	U-0581	UTE	43-047-32029
CIGE 132-20-9-21	NWSW	20	9	21	U-0575	UTE	43-047-32028
CIGE 133-35-9-21	SWSE	35	9	21	ST ML-22582	STATE	43-047-31978
CIGE 134-1-10-20	SWSW	1	10	20	U-02270-A	FED.	43-047-31989
CIGE 135-3-10-21	SWSW	3	10	21	U-0149078	FED.	43-047-32001
CIGE 136-4-10-21	SWNE	4	10	21	ST ML-22940	STATE	43-047-31979
CIGE 137-6-10-21	SENE	6	10	21	U-01791	FED.	43-047-31988
CIGE 138A-6-10-21	SENW	6	10	21	U-01791	FED.	43-047-31987
CIGE 139-10-10-21	SWNE	10	10	21	U-0149079	FED.	43-047-31986
CIGE 140-16-10-21	NENE	16	10	21	ST ML-10755	STATE	43-047-31977
CIGE 141-7-10-22	NWNE	7	10	22	ST ML-23609	STATE	43-047-31970
CIGE 142-25-9-21	SENE	25	9	21	ST U-01189	STATE	43-047-31994
CIGE 143-34-9-21	SWNE	34	9	21	ST U-01194-A	STATE	43-047-31995
CIGE 144-2-10-22	SWNE	2	10	22	ST ML-22651	STATE	43-047-32022
CIGE 145-29-9-22	SENW	29	9	22	ST ML-22935	STATE	43-047-31993
CIGE 146-16-10-21	NWNE	16	10	21	ST ML-10755	STATE	43-047-32021
CIGE 147-36-9-22	SESW	36	9	22	ST ML-22650	STATE	43-047-32020
CIGE 148-31-9-22	NWNE	31	9	22	ST ML-22935-A	STATE	43-047-32024
CIGE 149-8-10-21	NWNE	8	10	21	U-01791	FED.	43-047-32056
CIGE 150-9-10-21	SWNE	9	10	21	U-01416	FED.	43-047-32058
CIGE 151-10-10-21	SWSE	10	10	21	U-0149079	FED.	43-047-32059
CIGE 152-33-9-22	SESW	33	9	22	U-01191-A	FED.	43-047-32068
CIGE 153-35-9-22	SESW	35	9	22	U-010954-A	FED.	43-047-32067
CIGE 154-13-10-20	NWNW	13	10	20	U-4485	STATE	43-047-32119
CIGE 155-9-9-21	SENE	9	9	21	U-01188-B	UTE	43-047-32157

13-Apr-92

NATURAL BUTTES UINTAH COUNTY, UTAH

WELL #	LOCATION			RGE	STATE OR BLM		API NUMBER
	QUAD	SEC	TWP		LEASE #	SURFACE	
CIGE 156-16-9-21	NESE	16	9	21	ST ML-3282	UTE	43-047-32195
CIGE 157-16-9-21	SWNW	16	9	21	U-38409	UTE	43-047-32160
CIGE 158-21-9-21	NESE	21	9	21	U-0576	UTE	43-047-32158
CIGE 159-6-10-21	NWNE	6	10	21	U-01791	FED.	43-047-32120
CIGE 160-14-10-21	SWSE	14	10	21	U-01393-C	FED.	43-047-32124
CIGE 161-2-10-22	SESE	2	10	22	ST ML-22651	STATE	43-047-32168
CIGE 162-36-9-22	SESE	36	9	22	ST ML-22650	STATE	43-047-32164
CIGE 163-15-9-21	SENE	15	9	21	U-01193	UTE	43-047-32192
CIGE 164-34-9-22	NWNE	34	9	22	U-0149077	FED.	43-047-32141
CIGE 165-1-10-20	SWNW	1	10	20	U-02270-A	FED.	43-047-32114
CIGE 166-3-10-21	NENW	3	10	21	U-0149078	FED.	43-047-32172
CIGE 167-7-10-21	NENE	7	10	21	U-01791	FED.	43-047-32142
CIGE 168-16-10-21	NWSE	16	10	21	ST ML-10755	STATE	43-047-32123
CIGE 169-2-10-21	SENE	2	10	21	ST ML-22652	STATE	43-047-

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT" - for such proposals

5. Lease Designation and Serial No.

UTU-01393D

6. If Indian, Alottee or Tribe Name

N/A

7. If Unit or CA, Agreement Designation

Natural Buttes Unit

8. Well Name and No.

NBU #114

9. API Well No.

43-047-31923

10. Field and Pool, Or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah County, UT

SUBMIT IN TRIPLICATE

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No.

P. O. Box 749, Denver, CO 80201-0749 (303) 573-4455

4. Location of Well (Footage, Sec., T., R., M., Or Survey Description)

767' FSL & 526' FWL
SW/SW Section 5-T10S-R21E

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

Notice of Intent
 Subsequent Report
 Final Abandonment Notice


Abandonment
 Recompletion
 Plugging Back
 Casing Repair
 Altering Casing
 Other **CO, Acdz, Lwr Tbg & install Plunger Lift Equip.**

Change of Plans
 New Construction
 Non-Routine Fracturing
 Water Shut-Off
 Conversion to Injection
 Dispose Water

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markets and zones pertinent to this work.)*

Please see the attached workover procedure for work to be performed on the subject well.



14. I hereby certify that the foregoing is true and correct

Signed Sheila Bremer Title Environmental & Safety Analyst Date 09/18/95
Sheila Bremer

(This space for Federal or State office use)

APPROVED BY _____ Title _____ Date _____
Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side

NBU #114
Natural Buttes Field
Section 5-T10S-R21E

WELL DATA:

Location: 767 FSL 526' FWL Sec. 5-T10S-R21E
Elevation: 5046' GR, 5058' KB
Total Depth: 6090', PBTD 6021' (7/91)
Casing: 8-5/8" 24# K-55 ST&C @ 249' w/180 sx
5-1/2" 17# J-55 LT&C @ 6090' w/1135 sx
Tubing: 2-3/8" 4.7# J-55 @ 4880'
Formation: Wasatch (5021'-5875' - 38 holes)

PROCEDURE:

1. MI & RU. Kill well w/3% KCL water. ND WH. NU BOP. POOH w/2-3/8" tubing.
2. RIH w/mill to cleanout from 5804' to 6021' (PBTD) BP 5875'
3. TIH w/2 3/8" tubing to \pm 5890'. ND BOP, NU tree.
4. Spot 1000 gals of 15% HCL across perforations. Allow acid to soak 3-4 hours. Swab back acid. Flow to pit to clean up.
5. Install plunger lift stop via WL. RD & MO. Complete installation of plunger lift equipment.
6. After returning the well to sales line, obtain rates and pressures.

Rate prior to W/O (8/23/95): 37 MCF, on 20/64" choke (FTP 300#, CP 300#, LP 267#).

Well NBU # 114 5-10-21

Location 767 FSL 526 FWL Sel S T10S R21E

KB. 5058' 5046' GR

8 5/8" OD 24 LB. K-SS STSC CSG. w/ 180 SV


TOC @ SURFACE

5 1/2" OD 17 LB. J-SS LTSC CSG. w/ 1135 SX

TOC @ SURF

8 5/8" @ 249'

2 3/8" OD, 4.7#, J-SS EUC @ 4880'

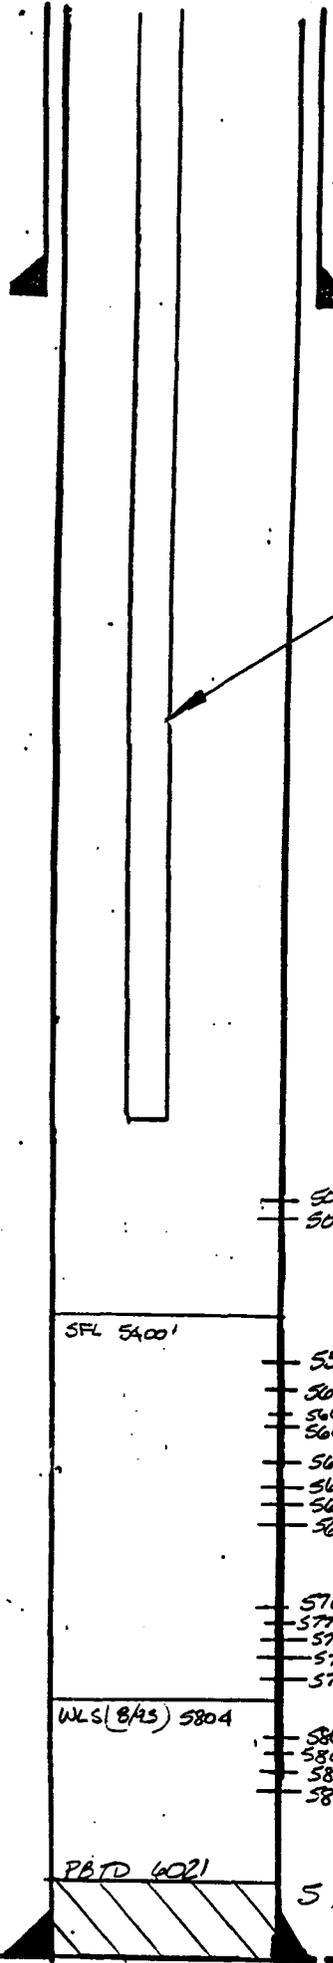

5021
5023

SFL 5400'

5596
5600
5606
5608
5616
5619
5622
5626

(7/1) Washack (5021-5875, 38 holes)

Perf w/ 4" CGG gun (1 JSPP & reperf. w/ 1 JSPP)
5021, 23, 5596, 5600, 06, 08, 16, 19, 23, 26
576, 70, 74, 77, 80 5861, 64, 67, 75

5761
5770
5774
5777
5778

BD w/ 1200 gal 3% KCL water + 80 BS's

Frac w/ 282,000# sand + 88,620 gal 3% KCL sol + 30% CO2

WLS (8/15) 5804

5861
5864
5867
5875


1PF (7/1) 900 MF + 15 BW on 2 1/4" CTK FTP 450# CP 525#

PBTD 6021

5 1/2" @ 6090

TD 6090

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT



FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.

Use "APPLICATION FOR PERMIT" - for such proposals

5. Lease Designation and Serial No.

UNITAH-01393D

6. If Indian, Abtee or Tribe Name

N/A

7. If Unit or CA, Agreement Designation

Natural Buttes Unit

8. Well Name and No.

NBU #114

9. API Well No.

43-047-31923

10. Field and Pool, Or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah County, Utah

SUBMIT IN TRIPLICATE

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No.

P. O. Box 749, Denver, CO 80201-0749

(303) 573-4476

4. Location of Well (Footage, Sec., T., R., M., Or Survey Description)

767' FSL & 526' FWL

SW/SW Section 5, T10S-R21E

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

Notice of Intent
 Subsequent Report
 Final Abandonment Notice

Abandonment
 Recompletion
 Plugging Back
 Casing Repair
 Altering Casing
 Other CO, acidize, lwr tbg, install PLE

Change of Plans
 New Construction
 Non-Routine Fracturing
 Water Shut-Off
 Conversion to Injection
 Dispose Water

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markets and zones pertinent to this work.)*

Please see the attached chronological history for work performed in the subject well.

14. I hereby certify that the foregoing is true and correct

Signed

Bonnie Carson
Bonnie Carson

TITLE Sr. Environmental & Safety Analyst

Date

03/21/96

(This space for Federal or State office use)

APPROVED BY

TITLE

Date

Conditions of approval, if any:

Jan Credit
8/2/96

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side

3/27/91 SI waiting on frac. Drop from report until further activity.

7/27/91 Flow back after frac. RU Western. Frac Wasatch w/88,620 gals 3% KCl gel, 282,000 lbs sand, 150 tons CO₂ (30% CO₂). AIR 39 BPM, AIP 4500 psi, ISIP 2200 psi, 15 min 2000 psi. SI 5 hrs.
DC: \$95,600 TC: \$385,256

7/28/91 Flowing 2.3 MMCFD CO₂, FTP 425 psi, CP 750 psi, 20/64" choke, 12 BWPD.

7/29/91 Flowing 1 MMCFD CO₂, FTP 425 psi, CP 750 psi, 20/64" choke, 12 BWPD.

7/30/91 Flowing 700 MCFD, FTP 400 psi, CP 550 psi, 20/64" choke, 15 BWPD. Gas will burn.

7/31/91 Flowing 900 MCFD, FTP 450 psi, CP 525 psi, 20/64" choke, 15 BWPD.

8/1/91 Flowing 900 MCFD, FTP 380 psi, CP 500 psi, 20/64" choke, 10 BWPD.

8/2/91 Flowing 800 MCFD, FTP 380 psi, CP 500 psi, 20/64" choke, 10 BWPD.

8/3/91 SI waiting on connection. Drop from report until further activity.

8/7/91 WOPLC. MIRU Sun Well Service. TIH w/sinker bar & slick line. Tag PBTD @ 5970', small bridge @ 5950'. RU Atlas and run prism log. RD Atlas. Drop from report.
DC: \$6,934 TC: \$392,190

CO₂ Acidize, Lower Tubing & PDB

12/7/95 MIRU Colorado Well Service Rig #26. Blow down & kill well w/40 bbls 3% KCl wr. ND WH. NU BOP. PU & RIH w/tbg, tag fill @ 5798'. POH w/tbg. PU & start RIH w/hydrastatic bailer. SDFN
DC: \$4,180 TC: \$4,180

12/08/95 Made 3 runs w/hydrostatic bailer. 1st run, tag fill @ 5798'. CO to 5855'. 2nd run, tag fill 2 5835'. CO to 5907'. 3rd run, tag fill @ 5877'. CO to 5968'. Start POH..SDFN
DC: \$4,050 TC: \$8,230

12/09/95 Finish POH & empty bailer. RIH w/hydrostatic bailer, tag fill 2 5838', CO to PBTD @ 6052'. POH & LD bailer. RIH & broach prod tbg - 194 jts landed @ 5887' w/notched clr on btm. SN 1 jt up & 10' blast jt on top. ND BOP, NU WH. SDFN
DC: \$6,220 TC: \$14,450

12/10/95 RU B-J Spot 10,000 gal 15% HCl across perms. RD & MO Colorado Well Service Rig #26, let acid soak 4 hrs. MI&RU Delsco Swabg Rig, made 12 swab runs, recovered 55 BW, IFL 4000', FFL 4200', SICP 60 psi slight gas cut fluid, no blow. SDFN.
DC: \$4,590 TC: \$19,040

12/11/95 SITP 0 psi, SICP 100 psi. Made 17 swab runs, recovered 62 BW, IFL 4000', FFL 4900', SICP 210 gas cut fluid, no blow.
DC: \$1,390 TC: \$20,430

12/12/95 SITP 0 psi, SICP 250 psi. Made 21 swab runs, recovered 63 BW, IFL 5000', FFL 5100', SICP 325 gas cut fluid, no blow. SDFN
DC: \$1,420 TC: \$21,850

12/13/95 SITP 0 psi, SICP 350 psi. Run in with swab. Tag fluid @ 4900'--Made 20 swab runs. Swab back 60 bbls, starting to see some gas last 5 runs. No flow. SDFN
DC: \$1,396 TC: \$24,996

12/14/95 SITP 60 psi, SICP 500 psi, SFL 3500', FFL 5300'. Made 9 swab runs, recovered 25 bbls. 10 min blow after 5 runs, no blow on last 4 runs. CP went to 290 psi. SWI to build press.
DC: \$1,000 TC: \$29,184

12/15/95 SI for PBU. Swabd 25 BLW. FFL @ 5300'.

12/19/95 TP 60 psi, CP 520 psi. Made 1 swab run, well flowing. Made 7 runs w/plunger. TP went to 325 psi, made 2 more swab runs, CP went to 250 psi w/no blow after last swab run. SFL 4700', FFL 5400'. SI to build press.
DC: \$967 TC: \$33,318

12/20/95 TP 180 psi, CP 520 psi. Made 1 swab run, well flowed. Made 8 run w/plunger. CP went to 250 psi, no flow after last swab. SCL 4900', FFL 5300', recovered 25 BW. SI to build press.
DC: \$967 TC: \$32,276

12/21/95 SITP 200 psi, SICP 520 psi. Made 1 swab run w/plunger. Put on production @ 10am, 12/20/95 on low choke 10 to keep well from blowing itself-dead. Made 2 to 3 runs, logged off. Flowed 0 MCFPD, 0 BWPD, FTP 150 psi, CP 500 psi, 10/12" chk. Put on line @ noon.
DC: \$662 TC: \$32,438

12/22/95 SITP 0 psi, SICP 525 psi. Made 1 swab run, tag fluid @ 4500'. Kicked well off, watch one run w/plnger. RD swab rig. Set plunger to make 1 run every 3-1/2 hrs.
DC: \$695 TC: \$33,633

12/23/95 SITP 0 psi, SICP 450 psi. Made 1 run. Kick off. Tag fluid @ 4800', watch plunger make one more run. Set plunger to run even 2 hrs. Still running @ 5pm.
DC: \$817 TC: \$34,450

12/24/95 SITP 0 psi, SICP 500 psi. Made 1 run, tag fluid @ 4500'. Well kicked off, reset plunger. If well logs off, well SI for build-up Sunday & Christmas.
DC: \$612 TC: \$35,064

12/27/95 SITP 0 psi, SICP 520 psi. Made 1 swab run. FL 4500', Kick well off. Set plunger.
DC: \$713 TC: \$35,777

12/28/95 SITP 250 psi, SICP 400 psi. Plunger came up by jts self. Drop plunger well-died. Made 1 swab run then set plunger. SFL 4500', 4 BW.
DC: \$713 TC: \$35,890

12/29/95 Flowing 17 MCFPD, 20 BWPD, FTP 200 psi, CP 375 psi, 15/64" choke.

12/30/95 Flowing 151 MCFPD, 0 BWPD, FTP 300 psi, CP 0 psi, 0/0" choke. Cond well 50 bbls.

12/31/95 Flowing 19 MCFPD, 15 BWPD, FTP 260 psi, CP 375 psi, 20/64" choke. 2 hrs flow.

01/01/96 Flowing 39 MCFPD, 8 BWPD, FTP 260 psi, CP 375 psi, 20/64" choke. 2 hrs flow.

01/03/96 Flowing 29 MCFPD, 12 BWPD, FTP 260 psi, CP 305 psi, 20/64" choke. Plunger 3 hr flow.

01/04/96 Flowing 29 MCFPD, 12 BWPD, FTP 260 psi, CP 340 psi, 20/64" choke. 3 hr flow.

01/05/96 Flowing 39 MCFPD, 12 BWPD, FTP 275 psi, CP 340 psi, 20/64" choke. 4 hr flow.

01/06/96 Flowing 39 MCFPD, 12 BWPD, FTP 275 psi, CP 340 psi, 20/64" choke. 4 hr flow.

01/07/96 Flowing 30 MCFPD, 12 BWPD, FTP 275 psi, CP 340 psi, 20/64" choke. 3 hr flow.

01/08/96 Flowing 45 MCFPD, 12 BWPD, FTP 300 psi, CP 330 psi, 20/64" choke. 4 hr flow.

01/09/96 Flowing 35 MCFPD, 9 BWPD, FTP 225 psi, CP 325 psi, 20/64" choke. 3 hr flow.
FINAL REPORT

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING

5. Lease Designation and Serial Number
UTU- 01393D

6. Indian, Allottee or Tribe Name:
N/A

7. Unit Agreement Name:
Natural Buttes Unit

8. Well Name and Number:
NBU #114

9. API Well Number:
43-047-31923

10. Field and Pool, or Wildcat
Natural Buttes

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells.
Use APPLICATION FOR PERMIT TO DRILL OR DEEPEN form for such purposes

1. Type of Well: OIL GAS OTHER:

2. Name of Operator
Coastal Oil & Gas Corporation

3. Address and Telephone Number.
P.O. Box 1148, Vernal UT 84078 (435)781-7023

4. Location of Well
Footages: **767' FSL & 526' FWL** County: **Uintah**
QQ, Sec., T., R., M.: **SW/SW Sec. 5, T10S, R21W^E** State: **UT**

11. **CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

NOTICE OF INTENT
(Submit in Duplicate)

- | | |
|---|---|
| <input type="checkbox"/> Abandon | <input type="checkbox"/> New Construction |
| <input type="checkbox"/> Repair Casing | <input type="checkbox"/> Pull or Alter Casing |
| <input type="checkbox"/> Change of Plans | <input type="checkbox"/> Recomplete |
| <input type="checkbox"/> Convert to Injection | <input type="checkbox"/> Perforate |
| <input type="checkbox"/> Fracture Treat or Acidize | <input type="checkbox"/> Vent or Flare |
| <input type="checkbox"/> Multiple Completion | <input type="checkbox"/> Water Shut-Off |
| <input checked="" type="checkbox"/> Other <u>Variance</u> | |

Approximate date work will start _____

SUBSEQUENT REPORT
(Submit Original Form Only)

- | | |
|--|---|
| <input type="checkbox"/> Abandon* | <input type="checkbox"/> New Construction |
| <input type="checkbox"/> Repair Casing | <input type="checkbox"/> Pull or Alter Casing |
| <input type="checkbox"/> Change of Plans | <input type="checkbox"/> Perforate |
| <input type="checkbox"/> Convert to Injection | <input type="checkbox"/> Vent or Flare |
| <input type="checkbox"/> Fracture Treat or Acidize | <input type="checkbox"/> Water Shut-Off |
| <input type="checkbox"/> Other _____ | |

Date of work completion _____

Report results of **Multiple Completions** and **Recompletions** to different reservoirs on WELL COMPLETION OR RECOMPLETION REPORT AND LOG form.

* Must be accompanied by a cement verification report.

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Coastal Oil & Gas Corporation is analyzing the NBU #114 for possible TA or PA. The subject location is not currently producing and Coastal requests that a variance be granted to NOT submit the monthly flowchart until further analyses can be established.

RECEIVED

FEB 22 2000

**DIVISION OF
OIL, GAS AND MINING**

13. Name & Signature Katy Dow Title Environmental Jr. Analyst Date 2/14/00

(This space for State use only)

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL OIL WELL GAS WELL OTHER _____

8. WELL NAME and NUMBER:

Exhibit "A"

2. NAME OF OPERATOR:
El Paso Production Oil & Gas Company

9. API NUMBER:

3. ADDRESS OF OPERATOR: 8 South 1200 East CITY Vernal STATE Utah ZIP 84078

PHONE NUMBER:
435-789-4433

10. FIELD AND POOL, OR WILDCAT:

4. LOCATION OF WELL
FOOTAGES AT SURFACE:
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:

COUNTY:
STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA



TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Name Change</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

As a result of the merger between The Coastal Corporation and a wholly owned subsidiary of El Paso Energy Corporation, the name of Coastal Oil & Gas Corporation has been changed to El Paso Production Oil & Gas Company effective March 9, 2001.

See Exhibit "A"

Bond # 400JU0708

Coastal Oil & Gas Corporation
NAME (PLEASE PRINT) John T. Elzner TITLE Vice President
SIGNATURE  DATE 06-15-01
El Paso Production Oil & Gas Company
NAME (PLEASE PRINT) John T. Elzner TITLE Vice President
SIGNATURE  DATE 06-15-01

RECEIVED

JUN 19 2001

DIVISION OF
OIL, GAS AND MINING

Office of the Secretary of State

I, HARRIET SMITH WINDSOR, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF AMENDMENT OF "COASTAL OIL & GAS CORPORATION", CHANGING ITS NAME FROM "COASTAL OIL & GAS CORPORATION" TO "EL PASO PRODUCTION OIL & GAS COMPANY", FILED IN THIS OFFICE ON THE NINTH DAY OF MARCH, A.D. 2001, AT 11 O'CLOCK A.M.

RECEIVED

JUN 14 2001

DIVISION OF
OIL, GAS AND MINING



Harriet Smith Windsor
Harriet Smith Windsor, Secretary of State

0610204 8100

AUTHENTICATION: 1061007

010162788

DATE: 04-03-01

CERTIFICATE OF AMENDMENT

OF

CERTIFICATE OF INCORPORATION

COASTAL OIL & GAS CORPORATION (the "Company"), a corporation organized and existing under and by virtue of the General Corporation Law of the State of Delaware, DOES HEREBY CERTIFY:

FIRST: That the Board of Directors of the Company, by the unanimous written consent of its members, filed with the minutes of the Board, adopted a resolution proposing and declaring advisable the following amendment to the Certificate of Incorporation of the Company:

RESOLVED that it is deemed advisable that the Certificate of Incorporation of this Company be amended, and that said Certificate of Incorporation be so amended, by changing the Article thereof numbered "FIRST." so that, as amended, said Article shall be and read as follows:

"FIRST. The name of the corporation is El Paso Production Oil & Gas Company."

SECOND: That in lieu of a meeting and vote of stockholders, the stockholders entitled to vote have given unanimous written consent to said amendment in accordance with the provisions of Section 228 of the General Corporation Law of the State of Delaware.

THIRD: That the aforesaid amendment was duly adopted in accordance with the applicable provisions of Sections 242 and 228 of the General Corporation Law of the State of Delaware.

IN WITNESS WHEREOF, said COASTAL OIL & GAS CORPORATION has caused this certificate to be signed on its behalf by a Vice President and attested by an Assistant Secretary, this 9th day of March 2001.

COASTAL OIL & GAS CORPORATION

David L. Siddall
David L. Siddall
Vice President

Attest:

Margaret E. Roark
Margaret E. Roark, Assistant Secretary

RECEIVED

STATE OF DELAWARE
SECRETARY OF STATE
DIVISION OF CORPORATIONS
FILED 11:00 AM 03/09/2001
010118394 - 0610204

JUN 19 2001

DIVISION OF
OIL, GAS AND MINING



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

RECEIVED

JUL 12 2001

DIVISION OF
OIL, GAS AND MINING

In Reply Refer To:
3106
UTSL-065841
(UT-924)

JUL 10 2001

NOTICE

El Paso Production Oil & Gas Company : Oil and Gas
Nine Greenway Plaza :
Houston TX 77046-0095 :

Name Change Recognized


Acceptable evidence has been received in this office concerning the name change of Coastal Oil & Gas Corporation into El Paso Production Oil & Gas Company with El Paso Production Oil & Gas Company being the surviving entity.

For our purposes, the name change is recognized effective March 9, 2001.

The oil and gas lease files identified on the enclosed exhibit have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Coastal Oil & Gas Corporation to El Paso Production Oil & Gas Company. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Wyoming and Colorado.



Opolonia L. Abeyta
Acting Chief, Branch of
Minerals Adjudication

Enclosure

1. Exhibit of Leases (1 pp)

cc: Moab Field Office
Vernal Field Office
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217
~~State of Utah, DOGM~~, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114
Teresa Thompson (UT-922)
Joe Incardine (UT-921)

Exhibit of Leases

UTUSL-065841A	UTU-47172	UTU-74415	UTU-53860
UTU-28652	UTU-50687	UTU-74416	UTU-66401
UTU-37943	UTU-52298	UTU-75091	UTU-67868
UTU-44089	UTU-0109054	UTU-75096	UTU-65389
UTU-44090A	UTU-0143511	UTU-75097	UTU-77084
UTU-61263	UTU-0143512	UTU-75673	UTU-61430
UTU-00343	UTU-38401	UTU-76259	UTU-72633
UTU-02651	UTU-38411	UTU-76260	UTU-72650
UTU-02651B	UTU-38418	UTU-76261	UTU-49692
UTU-0142175	UTU-38419	UTU-76493	UTU-57894
UTU-70235	UTU-38420	UTU-76495	UTU-76829
UTU-70406	UTU-38421	UTU-76503	UTU-76830
UTU-74954	UTU-38423	UTU-78228	UTU-76831
UTU-75132	UTU-38424	UTU-78714	
UTU-75699	UTU-38425	UTU-78727	
UTU-76242	UTU-38426	UTU-78734	
UTU-78032	UTU-38427	UTU-79012	
UTU-4377	UTU-38428	UTU-79011	
UTU-4378	UTU-53861	UTU-71694	
UTU-7386	UTU-58097	UTU-00576	
UTU-8344A	UTU-64376	UTU-00647	
UTU-8345	UTU-65222	UTU-01470D	
UTU-8347	UTU-65223	UTU-0136484	
UTU-8621	UTU-66746	UTU-8344	
UTU-14646	UTU-67178	UTU-8346	
UTU-15855	UTU-67549	UTU-8648	
UTU-25880	UTU-72028	UTU-28212	
UTU-28213	UTU-72632	UTU-30289	
UTU-29535	UTU-73009	UTU-31260	
UTU-29797	UTU-73010	UTU-33433	
UTU-31736	UTU-73013	UTU-34711	
UTU-34350	UTU-73175	UTU-46699	
UTU-34705	UTU-73434	UTU-78852	
UTU-37116	UTU-73435	UTU-78853	
UTU-37355	UTU-73444	UTU-78854	
UTU-37573	UTU-73450	UTU-075939	
UTU-38261	UTU-73900	UTU-0149767	
UTU-39223	UTU-74409	UTU-2078	
UTU-40729	UTU-74410	UTU-44426	
UTU-40736	UTU-74413	UTU-49530	
UTU-42469	UTU-74414	UTU-51026	

OPERATOR CHANGE WORKSHEET

ROUTING

1. GLH		4-KAS
2. CDW ✓		5-LP ✓
3. JLT		6-FILE

Enter date after each listed item is completed

Change of Operator (Well Sold)

Designation of Agent

Operator Name Change (Only)

X Merger

The operator of the well(s) listed below has changed, effective: **3-09-2001**

FROM: (Old Operator):
COASTAL OIL & GAS CORPORATION
Address: 9 GREENWAY PLAZA STE 2721
HOUSTON, TX 77046-0995
Phone: 1-(713)-418-4635
Account N0230

TO: (New Operator):
EL PASO PRODUCTION OIL & GAS COMPANY
Address: 9 GREENWAY PLAZA STE 2721 RM 2975B
HOUSTON, TX 77046-0995
Phone: 1-(832)-676-4721
Account N1845

CA No.

Unit: NATURAL BUTTES

WELL(S)

NAME	API NO	ENTITY NO	SEC TWN RNG	LEASE TYPE	WELL TYPE	WELL STATUS
CIGE 135-3-10-21	43-047-32001	2900	03-10S-21E	FEDERAL	GW	P
CIGE 166-3-10-21	43-047-32172	2900	03-10S-21E	FEDERAL	GW	P
CIGE 266-3-10-21	43-047-32995	2900	03-10S-21E	FEDERAL	GW	P
NBU 330	43-047-33228	2900	03-10S-21E	FEDERAL	GW	P
CIGE 225-3-10-21	43-047-33417	99999	03-10S-21E	FEDERAL	GW	APD
NBU 365	43-047-33777	2900	03-10S-21E	FEDERAL	GW	DRL
NBU 28-4B	43-047-30367	2900	04-10S-21E	FEDERAL	GW	P
NBU CIGE 38-4-10-21	43-047-30495	2900	04-10S-21E	FEDERAL	GW	P
NBU 207-4	43-047-31177	2900	04-10S-21E	FEDERAL	GW	P
CIGE 108D-4-10-21	43-047-31756	2900	04-10S-21E	FEDERAL	GW	P
NBU 390-4E	43-047-32835	2900	04-10S-21E	FEDERAL	GW	P
CIGE 206-4-10-21	43-047-32996	2900	04-10S-21E	FEDERAL	GW	P
NBU 326-4E	43-047-33697	2900	04-10S-21E	FEDERAL	GW	P
NBU 29-5B	43-047-30368	2900	05-10S-21E	FEDERAL	GW	P
NBU 12-5-10-21 GR	43-047-30426	11634	05-10S-21E	FEDERAL	GW	P
COG NBU 102	43-047-31757	2900	05-10S-21E	FEDERAL	GW	P
NBU 114	43-047-31923	2900	05-10S-21E	FEDERAL	GW	S
NBU 391-5E	43-047-32988	2900	05-10S-21E	FEDERAL	GW	P
NBU 16-6B	43-047-30316	2900	06-10S-21E	FEDERAL	GW	P
NBU CIGE 30-6-10-21	43-047-30498	2900	06-10S-21E	FEDERAL	GW	S

OPERATOR CHANGES DOCUMENTATION

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 06/19/2001
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 06/19/2001
3. The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 06/21/2001
4. Is the new operator registered in the State of Utah: YES Business Number: 608186-0143

5. If **NO**, the operator was contacted contacted on: N/A
6. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the (merger, name change, or operator change for all wells listed on Federal or Indian leases on: 07/10/2001
7. **Federal and Indian Units:** The BLM or BIA has approved the successor of unit operator for wells listed on: 07/10/2001
8. **Federal and Indian Communization Agreements ("CA"):** The BLM or the BIA has approved the operator change for all wells listed involved in a CA on: 07/10/2001
9. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

DATA ENTRY:

1. Changes entered in the **Oil and Gas Database** on: 08/02/2001
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 08/02/2001
3. Bond information entered in RBDMS on: N/A
4. Fee wells attached to bond in RBDMS on: N/A

STATE BOND VERIFICATION:

1. State well(s) covered by Bond No.: N/A

FEDERAL BOND VERIFICATION:

1. Federal well(s) covered by Bond No.: WY 2793

FEE WELLS - BOND VERIFICATION/LEASE INTEREST OWNER NOTIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond No: N/A
2. The **FORMER** operator has requested a release of liability from their bond on: N/A
The Division sent response by letter on: N/A
3. (R649-2-10) The **FORMER** operator of the Fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: _____

FILMING:

1. All attachments to this form have been **MICROFILMED** on: _____

FILING:

1. **ORIGINALS/COPIES** of all attachments pertaining to each individual well have been filled in each well file on: _____

COMMENTS: Master list of all wells involved in operator change from Coastal Oil & Gas Corporation to El Paso Production Oil and Gas Company shall be retained in the "Operator Change File".

JAN. 17. 2003 3:34PM

WESTPORT

NO. 173 P. 2

**WESTPORT OIL AND GAS COMPANY, L.P.**

410 Seventeenth Street #2300 Denver Colorado 80202-4436
Telephone: 303 573 5404 Fax: 303 573 5609

February 1, 2002

Department of the Interior
Bureau of Land Management
2850 Youngfield Street
Lakewood, CO 80215-7093
Attention: Ms. Martha Maxwell

RE: BLM Bond CO-1203
BLM Nationwide Bond 158626364
Surety - Continental Casualty Company
Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.
Conversion of Westport Oil and Gas Company, Inc., into Westport Oil and Gas Company, L.P.
Assumption Rider - Westport Oil and Gas Company, L.P.

Dear Ms. Maxwell:

Pursuant to our recent conversations, please find the following list of enclosures for the BLM's consideration and approval:

Two (2) Assumption Riders, fully executed originals.
Copies of Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.
Copies of Westport Oil and Gas Company, Inc., conversion into Westport Oil and Gas Company, L.P.
List of all Federal/BIA/State Leases - Belco/Westport's leases - in all states.

Please inform us of any additional information needed to complete the change to Westport Oil and Gas Company, L.P., as operator of record.

I thank you for your assistance and cooperation in this matter. Please do not hesitate contacting the undersigned, should a question arise.

Sincerely,
Westport Oil and Gas Company, L.P.

Debby J. Black
Debby J. Black
Engineer Technician

Encl:



United States Department of the Interior **RECEIVED**

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

FEB 22 2002

DIVISION OF
OIL, GAS AND MINING

In Reply Refer To:
3106
UTU-25566 et al
(UT-924)

FEB 21 2002

NOTICE

Westport Oil and Gas Company L.P. : Oil and Gas
410 Seventeenth Street, #2300 :
Denver Colorado 80215-7093 :

Name Change Recognized

Acceptable evidence has been received in this office concerning the name change of Westport Oil and Gas Company, Inc. into Westport Oil and Gas Company, L.P. with Westport Oil and Gas Company, L.P. being the surviving entity.


For our purposes, the name change is recognized effective December 31, 2001.

The oil and gas lease files identified have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Westport Oil and Gas Company, Inc. to Westport Oil and Gas Company, L.P.. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Colorado.

UTU-03405
UTU-20895
UTU-25566
UTU-43156
UTU-49518
UTU-49519
UTU-49522
UTU-49523



Robert Lopez
Chief, Branch of
Minerals Adjudication

cc: Moab Field Office
Vernal Field Office
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217
State of Utah, DOGM, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114
Teresa Thompson (UT-922)
Joe Incardine (UT-921)

memorandum

Branch of Real Estate Services
Uintah & Ouray Agency

Date: 5 December, 2002

Reply to
Attn of: Supervisory Petroleum Engineer

Subject: Modification of Utah Division of Oil, Gas and Mining Regulations

To: Director, Utah Division of Oil, Gas and Mining Division: John Baza

We have been advised of changes occurring with the operation of your database for Change of Operator. You will be modifying your records to reflect Change of Operator once you have received all necessary documentation from the companies involved, and perhaps in advance of our Notice of Concurrence/Approval of Change of Operator where Indian leases are involved.

We have no objection.

With further comment to Rulemaking, I wish to comment concerning the provision of Exhibits for upcoming Hearings. I would like to see the Uintah & Ouray Agency, BIA, and the Ute Indian Tribe, Energy & Mineral Resources Department added to the list of those parties that receive advance Exhibits so as to allow us to have research time prior to Hearing dates. We will be able to provide a more informed recommendation to the Oil, Gas and Mining Board. It would be best if we would receive only those Exhibits that concern Indian lands, specifically on or adjacent to Indian lands. This may be a difficult situation to attain, as it is not always clear where 'on or adjacent' occurs.

I am aware that you have gone to extra effort to correct this matter already, and I fully appreciate it. My request is intended only to allow the addition of Uintah & Ouray Agency and Ute Indian Tribe to the official listing.

We appreciate your concern, and hope that these comments are timely enough for consideration in the revision process.



CC: Minerals & Mining Section of RES
Ute Energy & Mineral Resources Department: Executive Director
chron



United States Department of the Interior

BUREAU OF INDIAN AFFAIRS
Washington, D.C. 20240

FEB 10 2003

IN REPLY REFER TO:
Real Estate Services

Carroll A. Wilson
Principal Landman
Westport Oil and Gas Company, L.P.
1368 South 1200 East
Vernal, Utah 84078

Dear Mr. Wilson:

This is in response to your request for approval of RLI Insurance Company's Nationwide Oil and Gas Lease Bond No. RLB0005239 executed effective December 17, 2002, (\$150,000 coverage) with Westport Oil and Gas Company, L. P., as principal.

This bond is hereby approved as of the date of this correspondence and will be retained in the Bureau of Indian Affairs' Division of Real Estate Services, 1849 C Street, NW, MS-4512-MIB, Washington, D.C. 20240. All Bureau oil and gas regional offices and the surety are being informed of this action.

In cases where you have existing individual and/or collective bonds on file with one or more of our regional offices, you may now request those offices, directly, to terminate in lieu of coverage under this Nationwide Bond.

Enclosed is a copy of the approved bond for your files. If we may be of further assistance in this matter, please advise.

Sincerely,

Director, Office of Trust Responsibilities

ACTING

Enclosure



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

IN REPLY REFER TO
UT-922

February 27, 2003

Westport Oil and Gas Company, L.P.
Attn: Gary D. Williamson
1670 Broadway, Suite 2800
Denver, Colorado 80202

Re: Natural Buttes Unit
Uintah County, Utah

Gentlemen:

On February 27, 2003, we received an indenture dated December 17, 2002, whereby El Paso Production Oil & Gas Company resigned as Unit Operator and Westport Oil and Gas Company, L.P., was designated as Successor Unit Operator for the Natural Buttes Unit, Uintah County, Utah.

This indenture was executed by all required parties and the signatory parties have complied with Sections 5 and 6 of the unit agreement. The instrument is hereby approved effective February 27, 2003. In approving this designation, the Authorized Officer neither warrants nor certifies that the designated party has obtained all required approval that would entitle it to conduct operations under the Natural Buttes Unit Agreement.

Your nationwide (Colorado) oil and gas bond No. 1203 will be used to cover all operations within the Natural Buttes Unit.

It is requested that you notify all interested parties of the change in unit operator. Copies of the approved instruments are being distributed to the appropriate federal offices, with one copy returned herewith.

Sincerely,

/s/ Robert A. Henricks

Robert A. Henricks
Chief, Branch of Fluid Minerals

Enclosure

bcc: Field Manager - Vernal (w/enclosure)
SITLA
Division of Oil, Gas & Mining
Minerals Adjudication Group
File - Natural Buttes Unit (w/enclosure)
Agr. Sec. Chron
Fluid Chron

UT922:TAThompson:tt:02/27/2003

RECEIVED

FEB 28 2003

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER:
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		7. UNIT or CA AGREEMENT NAME:
		8. WELL NAME and NUMBER: Exhibit "A"
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____	9. API NUMBER:	
2. NAME OF OPERATOR: El Paso Production Oil & Gas Company		10. FIELD AND POOL, OR WILDCAT:
3. ADDRESS OF OPERATOR: 9 Greenway Plaza Houston STATE TX ZIP 77064-0995	PHONE NUMBER: (832) 676-5933	
4. LOCATION OF WELL FOOTAGES AT SURFACE: COUNTY: QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____ <input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	


12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Operator change to Westport Oil and Gas Company, L.P., 1670 Broadway, Suite 2800, Denver, CO. 80202-4800, effective December 17, 2002.


BOND # _____

State Surety Bond No. RLB0005236
Fee Bond No. RLB0005238

EL PASO PRODUCTION OIL & GAS COMPANY

By: 
Jon R. Nelsen, Attorney-in-Fact

RECEIVED
FEB 28 2003
DIV. OF OIL, GAS & MINING

WESTPORT OIL AND GAS COMPANY, L.P.	
NAME (PLEASE PRINT) David R. Dix	TITLE Agent and Attorney-in-Fact
SIGNATURE 	DATE 12/17/02

(This space for State use only)

Form 3160-5
(August 1999)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or reenter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

5. Lease Serial No.
SEE ATTACHED EXHIBIT "A"

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
SEE ATTACHED EXHIBIT "A"

9. API Well No.
SEE ATTACHED EXHIBIT "A"

10. Field and Pool, or Exploratory Area

11. County or Parish, State
UINTAH COUNTY, UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY, L.P.

3a. Address
P.O. BOX 1148 VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7023

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED EXHIBIT "A"

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other

**SUCCESSOR OF
OPERATOR**

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zone. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed if testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator determined that the site is ready for final inspection.

WESTPORT OIL & GAS COMPANY, L.P., IS CONSIDERED TO BE THE OPERATOR ON THE ATTACHED DESCRIBED LANDS AND IS RESPONSIBLE UNDER THE TERMS AND CONDITIONS OF THE LEASE FOR THE OPERATIONS CONDUCTED ON THE LEASED LANDS OR PORTIONS THEREOF, BOND COVERAGE FOR THIS WELL IS PROVIDED BY FEDERAL NATIONWIDE BOND NO. 158626364, EFFECTIVE FEBRUARY 1, 2002, AND BIA NATIONWIDE BOND NO. RLB0005239, EFFECTIVE FEBRUARY 10, 2003.

RECEIVED

MAR 04 2003

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

CHERYL CAMERON

Title

OPERATIONS

Signature

Date

March 4, 2003

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

OPERATOR CHANGE WORKSHEET

ROUTING

1. GLH
2. CDW ✓
3. FILE

X Change of Operator (Well Sold)

Designation of Agent/Operator

Operator Name Change

Merger

The operator of the well(s) listed below has changed, effective: **12-17-02**

FROM: (Old Operator):	TO: (New Operator):
EL PASO PRODUCTION OIL & GAS COMPANY	WESTPORT OIL & GAS COMPANY LP
Address: 9 GREENWAY PLAZA	Address: P O BOX 1148
HOUSTON, TX 77064-0995	VERNAL, UT 84078
Phone: 1-(832)-676-5933	Phone: 1-(435)-781-7023
Account No. N1845	Account No. N2115

CA No. **Unit: NATURAL BUTTES**

WELL(S)

NAME	SEC TWN RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
NBU CIGE 38-4-10-21	04-10S-21E	43-047-30495	2900	FEDERAL	GW	P
NBU CIGE 81D-4-10-21	04-10S-21E	43-047-30854	2900	STATE	GW	S
NBU 390-4E	04-10S-21E	43-047-32835	2900	FEDERAL	GW	P
NBU 345-4E	04-10S-21E	43-047-34700	99999	FEDERAL	GW	APD
NBU 29-5B	05-10S-21E	43-047-30368	2900	FEDERAL	GW	P
COG NBU 102	05-10S-21E	43-047-31757	2900	FEDERAL	GW	P
NBU 114	05-10S-21E	43-047-31923	2900	FEDERAL	GW	S
NBU 391-5E	05-10S-21E	43-047-32988	2900	FEDERAL	GW	P
NBU 16-6B	06-10S-21E	43-047-30316	2900	FEDERAL	GW	P
NBU CIGE 30-6-10-21	06-10S-21E	43-047-30498	2900	FEDERAL	GW	P
CIGE 137-6-10-21	06-10S-21E	43-047-31988	2900	FEDERAL	GW	P
NBU 307-6E	06-10S-21E	43-047-32014	2900	FEDERAL	GW	P
CIGE 138-6-10-21	06-10S-21E	43-047-31987	2900	FEDERAL	GW	PA
CIGE 138A-6-10-21	06-10S-21E	43-047-32049	2900	FEDERAL	GW	P
CIGE 159-6-10-21	06-10S-21E	43-047-32120	2900	FEDERAL	GW	S
CIGE 259	06-10S-21E	43-047-34367	2900	FEDERAL	GW	S
CIGE 260	06-10S-21E	43-047-34368	2900	FEDERAL	GW	P
CIGE 392-6E	06-10S-21E	43-047-33783	2900	FEDERAL	GW	S
CIGE 261	07-10S-21E	43-047-34369	2900	FEDERAL	GW	P
CIGE 262	07-10S-21E	43-047-34370	2900	FEDERAL	GW	P

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 02/28/2003
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 03/04/2003
3. The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 03/06/2003
4. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
5. If **NO**, the operator was contacted on: _____

6. (R649-9-2)Waste Management Plan has been received on: IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM-12/31/2003 BIA-12/5/02

8. **Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: 02/27/2003

9. **Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: N/A

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

DATA ENTRY:

1. Changes entered in the **Oil and Gas Database** on: 03/19/2003
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 03/19/2003
3. Bond information entered in RBDMS on: N/A
4. Fee wells attached to bond in RBDMS on: N/A

STATE WELL(S) BOND VERIFICATION:

1. State well(s) covered by Bond Number: RLB 0005236

FEDERAL WELL(S) BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: 158626364

INDIAN WELL(S) BOND VERIFICATION:

1. Indian well(s) covered by Bond Number: RLB 0005239

FEE WELL(S) BOND VERIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB 0005238
2. The **FORMER** operator has requested a release of liability from their bond on: N/A
The Division sent response by letter on: N/A

LEASE INTEREST OWNER NOTIFICATION:

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: N/A

COMMENTS:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. Multiple Wells - see attached
2. Name of Operator WESTPORT OIL & GAS COMPANY, L.P.		6. If Indian, Allottee or Tribe Name
3a. Address P.O. BOX 1148 VERNAL, UT 84078	3b. Phone No. (include area code) (435) 781-	7. If Unit or CA/Agreement, Name and/or No. 891008900A
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Multiple Wells - see attached		8. Well Name and No. Multiple Wells - see attached
		9. API Well No. Multiple Wells - see attached
		10. Field and Pool, or Exploratory Area Natural Buttes Unit
		11. County or Parish, State Uintah County, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input type="checkbox"/> Other _____

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

Westport Oil & Gas requests a variance to Onshore Order No. 4, Part IIC.a. requiring each sales tank be equipped with a pressure-vacuum thief hatch and/or vent line valve. The variance is requested as an economic analysis shows the value of the shrunk condensate will not payout the incremental cost of purchasing and maintaining the valve resulting in a loss of value over the producing life of the well.

The volume lost to shrinkage by dropping the tank pressure from 6 ozs. to 0 psig is shown to be 0.3% of the tank volume. This was determined by lab analysis of a representative sample from the field. The sample shrunk from 98.82% of original volume to 98.52% when the pressure was dropped. The average NBU well produces approximately 6 bbls condensate per month. The resulting shrinkage would amount to 0.56 bbls per month lost volume due to shrinkage. The value of the shrunk and lost condensate does not recoup or payout the cost of installing and maintaining the valves and other devices that hold the positive tank pressure. An economic run based on the loss and costs is attached. Westport Oil & gas requests approval of this variance in order to increase the value of the well to the operator and the mineral royalty owners.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) J.T. Conley	Title Operations Manager	Date 9-2-2003
Signature <i>J.T. Conley</i>	Initials CHD	Date 9-2-2003

SEP 10 2003
DIV. OF OIL, GAS & MINING

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title Accepted by the Utah Division of Oil, Gas and Mining	Date 9/16/03	Federal Approval of This Action is Necessary
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.			
Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.			

Westport Oil & Gas, L.P.
Project Economics Worksheet

Instructions: Fill in blue areas with before and after project data. The evaluation results are shown below and graphed automatically at the bottom of the page. This sheet is protected to prevent accidental alteration of the formulas. See JTC for changes. OPX entered as annual costs and/or as unit OPX costs for \$/BF and \$/MCF

Project Name: **Condensate Shrinkage Economics**

Is this job a well pull or production rfg job ??? **N** (Y or N)

	BEFORE \$/Year	AFTER \$/Year	DIFFERENCE \$/Year
Gross Oil Revenue	\$1,088	\$1,099	\$11
Gross Gas Revenue	\$0	\$0	\$0
NGL Revenue	\$0	\$0	\$0
PULING UNIT SERVICE			\$0
WIRELINE SERVICE			\$0
SUBSURF EQUIP REPAIRS			\$0
COMPANY LABOR			\$0
CONTRACT LABOR	\$0	\$200	\$200
CONTR SERVICE			\$0
LEASE FUEL GAS	\$0	\$0	\$0
UTILITIES - ELECTRICITY	\$0	\$0	\$0
CHEMICAL TREATING			\$0
MATERIAL & SUPPLY	\$0	\$150	\$150
WATER & HAULING			\$0
ADMINISTRATIVE COSTS			\$0
GAS PLANT PROCESSING			\$0
Totals	\$0	\$350	\$350

Increased OPX Per Year

Investment Breakdown:

	Cap/Exp Code	Cost, \$
Capital \$	820/830/840	\$1,200
Expense \$	830/860	\$0
Total \$		\$1,200

Oil Price	\$ 23.00	\$/BO
Gas Price	\$ 3.10	\$/MCF
Electric Cost	\$ -	\$/HP / day
OPX/BF	\$ 2.00	\$/BF
OPX/MCF	\$ 0.62	\$/MCF

Production & OPX Detail:

	Before		After		Difference	
Oil Production	0.192	BOPD	0.194	BOPD	0.002	BOPD
Gas Production	0	MCFPD	0	MCFPD	0	MCFPD
Wtr Production	0	BWPD	0	BWPD	0	BWPD
Horse Power		HP		HP	0	HP
Fuel Gas Burned		MCFPD		MCFPD	0	MCFPD

Project Life:

Life = **20.0** Years
 (Life no longer than 20 years)

Internal Rate of Return:

After Tax IROR = **#DIV/0!**

AT Cum Cashflow:

Operating Cashflow = **(\$2,917)** (Discounted @ 10%)

Payout Calculation:

$$\text{Payout} = \frac{\text{Total Investment}}{\text{Sum(OPX + Incremental Revenue)}} = 1$$

Payout occurs when total AT cashflow equals investment
 See graph below, note years when cashflow reaches zero

Payout = **NEVER** Years or **#VALUE!** Days


Gross Reserves:

Oil Reserves = **6 BO**
 Gas Reserves = **0 MCF**
 Gas Equiv Reserves = **38 MCFE**

Notes/Assumptions:

An average NBU well produces 0.192 Bcpd with no tank pressure. The production is increased to 0.196 Bcpd if 6 ozs of pressure are placed on the tank. The increased production does not payout the valve cost or the estimated annual maintenance costs.

Project: Condensate Shrinkage Economics

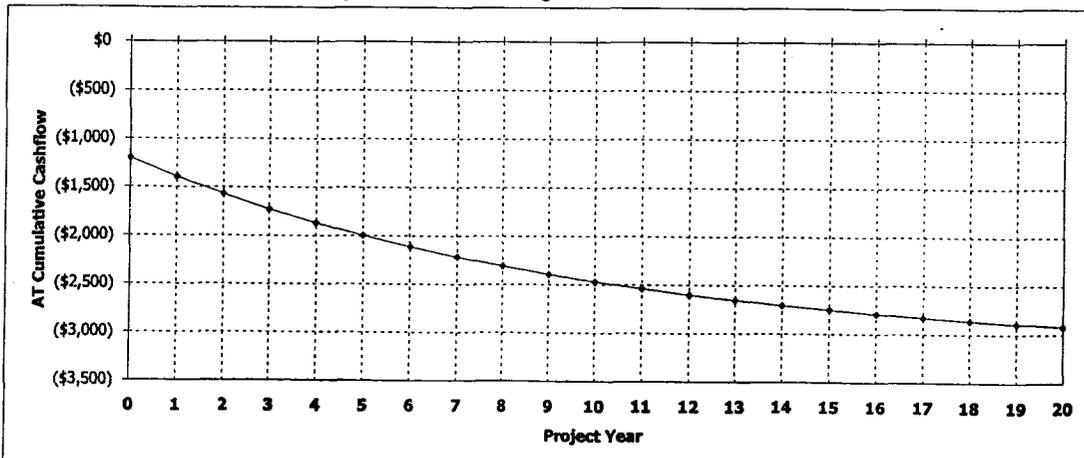

Westport Oil and Gas, Inc.

NBU/Ouray Field

RFL 2003-022

COMPARISON OF FLASH BACK PRESSURES

Calculated by Characterized Equation-of-State

Flash Conditions		Gas/Oil Ratio (scf/STbbl) (A)	Specific Gravity of Flashed Gas (Air=1.000)	Separator Volume Factor (B)	Separator Volume Percent (C)
psig	°F				

Calculated at Laboratory Flash Conditions

80	70			1.019	
0	122	30.4	0.993	1.033	101.37%
0	60	0.0	---	1.000	98.14%

Calculated Flash with Backpressure using Tuned EOS

80	70			1.015	
6.0 oz	65	24.6	0.777	1.003	98.82%
0	60	0.0	---	1.000	98.52%
80	70			1.015	
4.0 oz	65	24.7	0.778	1.003	98.82%
0	60	0.0	---	1.000	98.52%
80	70			1.015	
2.0 oz	65	24.7	0.779	1.003	98.82%
0	60	0.0	---	1.000	98.52%
80	70			1.015	
0	65	24.8	0.780	1.003	98.82%
0	60	0.0	---	1.000	98.52%

(A) Cubic Feet of gas at 14.696 psia and 60 °F per Barrel of Stock Tank Oil at 60 °F.

(B) Barrels of oil at indicated pressure and temperature per Barrel of Stock Tank Oil at 60 °F.

(C) Oil volume at indicated pressure and temperature as a percentage of original saturated oil volume.

Note: Bubblepoint of sample in original sample container was 80 psig at 70° F with 1 cc water

WELL	LEGALS	STFLEASENO	CANUMBER	APINO
NBU 058N2	27-10-22 NENW	UTU473	891008900A	430473083800S1
NBU 060	26-9-21 NWSW	U01194	891008900A	430473172800S1 ✓
NBU 062N3	16-10-21 SENW	ML10755	891008900A	430473090900S1
NBU 063N3	12-9-21 SWNW	UTU0141317	891008900A	430473109700S1
NBU 064N3	8-9-21 NESE	UTU0575B	891008900A	430473109800S1
NBU 065N3	14-9-21 SESW	UTU01193	891008900A	430473109900S1
NBU 067A	4-10-22 SWNE	UTU01191	891008900A	430473173700S1
NBU 068N2	26-9-21 NESE	ML22934	891008900A	430473108900S1 ✓
NBU 069N2	35-9-21 SWSW	U01194	891008900A	430473109000S1 ✓
NBU 070N3	3-10-22 SWNW	UTU01191	891008900A	430473110000S1
NBU 072N3	12-10-20 NWNW	UTU4478	891008900A	430473108800S1
NBU 074N3	24-10-20 SWNE	ML22790	891008900A	430473108700S1
NBU 075N3	20-10-21 NENE	UTU02278	891008900A	430473110300S1
NBU 078	30-9-22 NWNW	U463	891008900A	430473176200S1
NBU 080V	34-9-22 NWSW	UTU0149077	891008900A	430473124000S1
NBU 081V	35-9-21 SWNW	U01194	891008900A	430473123200S1 ✓
NBU 083J	27-9-21 NESW	U01194A	891008900A	430473123500S1 ✓
NBU 084V	6-10-22 NWNE	UTU01195B	891008900A	430473124500S1
NBU 085J	4-10-22 SWNW	UTU01191A	891008900A	430473124600S1
NBU 086J	3-10-22 NENE	UTU01191A	891008900A	430473125100S1
NBU 087J	3-10-22 NESW	UTU01191	891008900A	430473125000S1
NBU 088V	26-9-21 NENE	U01194	891008900A	430473123300S1 ✓
NBU 093	33-9-22 NESE	UTU01191A	891008900A	430473175300S1
NBU 097	25-9-21 NENW	U01189	891008900A	430473174400S1 ✓
NBU 098V	34-9-21 SWSW	U01194A	891008900A	430473132700S1 ✓
NBU 099	25-9-21 SWSW	U01194	891008900A	430473174500S1 ✓
NBU 101	3-10-21 NWSE	UTU0149078	891008900A	430473175500S1
NBU 102	5-10-21 SESW	UTU01393D	891008900A	430473175700S1
NBU 1021-16G	16-10-21 SWNE	ML10755	891008900A	430473511100S1 ✓
NBU 1021-20	2-10-21 SWSE	ML13826	891008900A	430473511000S1 ✓
NBU 103	10-9-21 SENW	U0141315	891008900A	430473195600S1
NBU 104	16-9-21 SENE	ML3282	891008900A	430473195700S1
NBU 105	17-9-21 SWSW	UTU0575	891008900A	430473230200S1
NBU 106	21-9-21 NESW	UTU0576	891008900A	430473194600S1
NBU 107	26-9-21 SENW	U01194	891008900A	430473191600S1
NBU 108	19-9-22 SESE	UTU0284	891008900A	430473195800S1
NBU 109	27-9-21 SENE	U01194A	891008900A	430473191700S1 ✓
NBU 110	28-9-21 NENE	U05676	891008900A	430473192400S1
NBU 111	25-9-21 SWNW	U01194	891008900A	430473192000S1 ✓
NBU 112	33-9-22 SESE	UTU01191	891008900A	430473193000S1
NBU 113	34-9-22 SESE	UTU0149077	891008900A	430473193100S1
NBU 114	5-10-21 SWSW	UTU01393D	891008900A	430473192300S1
NBU 115	10-10-21 NENW	UTU0149079	891008900A	430473192900S1
NBU 116	6-10-22 NWNW	UTU464	891008900A	430473192500S1
NBU 117	10-10-22 NENE	U01197A	891008900A	430473191400S1
NBU 118	22-9-20 SENE	UTU0577B	891008900A	430473196900S1
NBU 119	22-9-20 SENW	UTU0577B	891008900A	430473197300S1
NBU 120	10-9-21 NWNW	U0141315	891008900A	430473197200S1
NBU 121	13-9-21 NWNE	U01193	891008900A	430473208600S1
NBU 122	13-9-21 SESE	U01193	891008900A	430473230300S1
NBU 123	15-9-21 NWNW	UTU01188	891008900A	430473197400S1
NBU 124	16-9-21 NWNE	ML3282	891008900A	430473197100S1
NBU 125	17-9-21 SESE	UTU0575	891008900A	430473235000S1
NBU 126	21-9-21 SENW	UTU0576	891008900A	430473234900S1
NBU 127	21-9-21 SWNW	UTU0576	891008900A	430473196300S1
NBU 128	21-9-21 SWSW	UTU0576	891008900A	430473196400S1
NBU 129	22-9-21 SENE	UTU010950A	891008900A	430473196500S1
NBU 130	22-9-21 SWNW	UTU0147566	891008900A	430473196700S1
NBU 131	23-9-21 NWSW	UTU0149075	891008900A	430473196600S1
NBU 132	26-9-21 NWNW	U01194	891008900A	430473193800S1 ✓
NBU 133	28-9-21 SWNE	U05676	891008900A	430473195000S1

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
SEE ATTACHED

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
SEE ATTACHED

9. API Well No.
SEE ATTACHED

10. Field and Pool, or Exploratory Area
VARIOUS

11. County or Parish, State
UINTAH, UTAH

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY L.P.

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEE ATTACHED

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize <input type="checkbox"/> Deepen <input type="checkbox"/> Production (Start/Resume) <input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing <input type="checkbox"/> Fracture Treat <input type="checkbox"/> Reclamation <input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair <input type="checkbox"/> New Construction <input type="checkbox"/> Recomplete <input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans <input checked="" type="checkbox"/> Plug and Abandon <input checked="" type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection <input type="checkbox"/> Plug Back <input type="checkbox"/> Water Disposal

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

THE OPERATOR REQUESTS AUTHORIZATION TO PLACE THE SUBJECT WELL LOCATIONS ON TEMPORARILY ABANDONMENT STATUS, UNTIL SUCH TIME THE WELL LOCATIONS CAN BE PLUGGED AND ABANDON.

PLEASE REFER TO THE ATTACHED LIST OF PROPOSED PLUG AND ABANDONMENTS FOR THE NEXT 5 YEARS.

**APPROVED BY THE STATE
OF UTAH DIVISION OF
OIL, GAS, AND MINING**

COPY SENT TO OPERATOR
Date: 8-24-04
Initials: CHD

DATE: 8/20/2004
BY: [Signature]
* See Conditions of Approval (Attached)
Federal Approval of This Action Is Necessary

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)
Sheila Upchegg

Signature
[Signature]

Title
Regulatory Analyst

Date
May 25, 2004

THIS SPACE FOR FEDERAL OR STATE USE

Approved by _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office _____

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

API #	WELL NAME	S-T-R	LEASE NUMBERS
43-047-			

Proposed 2004 P&A's - 13 Wells

31900	EAST GUSHER 15-1A	15-6-20 NENE	UTU-58007
30423	JACK RABBIT 1-11	11-10-23 SWNE	UTU-38425
32540	SOUTHMAN CANYON 09-03M	9-10-23 SWSW	UTU-37355
32543	SOUTHMAN CANYON 31-01-L	31-9-23 NWSW	UTU-33433
31100	NBU 070N3	3-10-22 SWNW	UTU-01191
30221	NBU 018	10-10-22 SWNE	UTU-025187
20280	WALKER HOLLOW U MCLISH 1	8-7-23 SWSW.	UTU-02651
30011	WALKER HOLLOW U MCLISH 2	8-7-23 SWSE	UTU-02651
30030	WALKER HOLLOW U MCLISH 4	8-7-23 NESW	UTU-02651
31034	WALKER HOLLOW UNIT 6	8-7-23 SESE	UTU-02651
30027	WALKER HOLLOW U MCLISH 3	8-7-23 NESE	UTU-02651
31092	WALKER HOLLOW UNIT J-8	8-7-23 NWSE	UTU-02651
31975	NBU 153	11-10-22 SWNW	U-01197A

Proposed 2005 P&A's - 15 Wells

31833	BASER DRAW 5-1	5-7-22 NWNW	UTU-075939
31834	BASER DRAW 6-1	6-7-22 NWNW	UTU-075939
31859	BASER DRAW FEDERAL 6-2	6-7-22 SWNE	UTU-075939
31304	COORS FEDERAL 14-1D	14-7-21 NWNW	UTU-65223
32009	COORS FEDERAL 2-10HB	10-7-21 NWNW	UTU-6522
30753	DM ICE FRIDAY 34-22	34-8-20 NESE	14-20-H62-2997
32333	FEDERAL 11-1-M	11-6-20 SWSW	UTU-64376
33831	HORSESHOE BEND FED 03-1	3-7-21 NWSE	UTU-0142175
33832	HORSESHOE BEND FED 04-1	4-7-21 NWSE	UTU-66401
33872	HORSESHOE BEND FED 26-3	26-6-21 NWSW	UTU-38401
33667	KENNEDY WASH FED 14-1	14-8-23 NWSW	UTU-71424
30623	SAND RIDGE FED 23-17	17-8-23 NESW	UTU-0143276
31508	STIRRUP FEDERAL 29-2	29-6-21 NWSE	UTU-46699
31634	STIRRUP FEDERAL 29-3	29-6-21 SESE	UTU-78854
30815	WEST WALKER FED. 1-33	33-6-22 NWSW	UTU-38411

Proposed 2006 P&A's - 15 Wells

30524	BITTER CREEK 01-03	3-11-22 SWNE	UTU-29797
30379	CANYON VIEW FEDERAL 1-18	18-10-23 SENW	UTU-38421
30369	CROOKED CYN FED 1-17	17-10-23 NENW	UTU-37355
31778	E BENCH UNIT #1	33-11-22 NWSE	UT-121P
30365	FLAT MESA FED. 1-7	7-10-23 NWSE	UTU-38420
30544	LOOKOUT POINT STATE 1-16	16-10-23 NESE	ML-221886A
30766	LOVE UNIT B2-3	3-11-21 SWSW	UTU-8347
30560	NSO FEDERAL 1-12	12-10-23 NENW	UTU-38423
30558	PETE'S FLAT 1-1	1-10-23 NESE	UTU-40736
30382	SAGE HEN FEDERAL 1-6	6-10-23 NESE	UTU-38419
30383	SAGEBRUSH FEDERAL 1-8	8-10-23 SWNE	UTU-37355
30856	SOUTHMAN CANYON 01-05 FED	5-10-23 SENW	UTU-33433
30632	SOUTHMAN CANYON 4-4	4-10-23 NWSE	UTU-33433
30481	WHITE RIVER 1-14	14-10-23 NENW	UTU-38427
31775	WILLOW CREEK UNIT #1	27-11-20 SENE	UT-128P



State of Utah

Department of
Natural Resources

Division of
Oil, Gas & Mining

ROBERT L. MORGAN
Executive Director

LOWELL P. BRAXTON
Division Director

MICHAEL O. LEAVITT
Governor

OLENE S. WALKER
Lieutenant Governor

CONDITIONS OF APPROVAL TO EXTEND SI/TA OF WELL

Well Name and Number:	Several State and Federal wells
API Number:	See Sundry List
Operator:	Westport Oil and Gas Company L.P.
Reference Document:	Original Sundry dated May 25, 2004, received by DOGM on June 3, 2004

The Division of Oil, Gas and Mining (DOGM) accepts Westport's plan of action to Plug and Abandon sixty-nine wells by year-end 2008. Based upon the plan of action DOGM approves these sixty-nine (69) wells for extended shut-in until September 1, 2005.

Approval Conditions (Federal Approval necessary on all Federal/Indian wells):

1. If SI/TA is desired beyond the approval date listed above, the operator should submit a request for extended SI/TA at that time. Adherence to the accepted plan of action, wellbore conditions etc. will be taken into consideration.
2. A well monitoring program should be in place to ensure that health, safety and the environment are all protected (wellbore integrity).
3. Any changes in wellbore conditions or integrity; or sustained pressure on casing/casing annuli shall be reported to the Division immediately. A new monitoring program or remedial action may be necessary at that time.

Dustin K. Doucet
Petroleum Engineer

August 20, 2004

Date

43-049 Proposed 2007 P&A's - 15 Wells

30494	CIGE 035	1-10-20 NESW	UTU-02270A
30542	CIGE 066	23-10-21 SENW	UTU-02278A
30952	CIGE 073D	5-10-22 SWSW	UTU-01191A
30953	CIGE 074D	6-10-22 NWSE	UTU-01195
31915	CIGE 114	34-9-21 NESE	U-01194A
34436	CIGE 282	7-10-22 NENE	ML-23609
30962	KURIP 01-027	1-9-20 NENW	14-20-H62-3004
30848	NBU 043	26-10-20 NWSE	UTU-4476
30534	NBU 047N2	30-10-22 SESW	UTU-0132568A
31250	NBU 087J	3-10-22 NESW	UTU-01191A
31923	NBU 114	5-10-21 SWSW	UTU-01393D
31982	NBU 149	5-10-22 NESE	UTU-01191
31992	NBU 150	9-10-22 SENW	UTU-01196B
32234	NBU 188	10-10-22 SWSW	U-01196C
33692	WONSITS FEDERAL 01-05	5-8-22 LOT 5	UTU-72633

Proposed 2008 P&A's - 11 wells

32401	NBU 213	15-10-22 NWNW	UTU-025187
32480	NBU 217	28-9-21 NESW	U-05678
32944	NBU 242	5-10-22 SWSE	UTU-01191
32917	NBU 253	10-9-21 SWNW	U-0141315
32929	NBU 262	33-9-21 NENE	UTU-0576
33011	NBU 278	30-9-22 SWSW	U-463
32976	NBU 285	3-10-22 NWNW	UTU-01191
32886	NBU 296 GR	24-10-20 NWNE	UTU-4485
33776	NBU 364	29-9-21 SESE	UTU-0581
30838	NBU 58N2	27-10-22 NENW	U-473
31327	NBU 98-V	34-9-21 SWSW	U-01194-A

69 total wells

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU-01393D

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
NATURAL BUTTES UNIT

8. Well Name and No.
NBU 114

9. API Well No.
43-047-31923

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY L.P.

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SWSW SECTION 5-T10S-R21E 767'FSL & 526'FWL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input type="checkbox"/> Other _____

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

THE OPERATOR REQUESTS AUTHORIZATION TO PLUG AND ABANDON THE SUBJECT WELL LOCATION. THE SUBJECT WELL LOCATION HAS BEEN TEMPORARILY ABANDON AND SHUT-IN. THE OPERATOR HAS REVIEWED AND CONFIRMED THAT THE PRODUCTIVE ZONES ARE DEPLETED. THE IS NO ADDITIONAL DOWNHOLW POTENTIAL.

PLEASE REFER TO THE ATTACHED PLUG AND ABANDON PROCEDURE.

COPIES SENT TO OPERATOR
DATE: 10-12-05
INITIALS: CHO

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Sheila Upchego	Title Regulatory Analyst
Signature <i>Sheila Upchego</i>	Date September 29, 2005

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title Accepted by the Utah Division of Oil, Gas and Mining	Date	Federal Approval Of This Action Is Necessary
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.			

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED
OCT 04 2005
DIV. OF OIL, GAS & MINING

NBU 114
 767' FSL & 526' FWL
 SWSW - Section 5 - T10S - R21E
 Uintah County, UT

KBE: 5058'
 GLE: 5046'
 TD: 6090'
 PBTD: 6021'

API NUMBER: 43-047-31923
 LEASE NUMBER: UTU-01393D
 WI: 100%
 NRI: 81.248040%
 ORRI: 7.592840%

CASING: 12.25" hole
 8.625" 24#, k-55 @ 262'
 Cemented with 180 sx. Class G, circulated 13 BC to pit. TOC @ surface.

7.875" hole
 5.5" 17# j-55 @ 6090'
 Cemented with 400 sx. Slilcalite lead and 735 sx. Class G tail. Circulated 30 BC to pit. TOC @ surface by circulation.

TUBING: 2.375" 4.7# J-55 tubing at 5887'

Tubular	Drift inches	Collapse psi	Burst Psi	Capacities		
				Gal./ft.	Cuft/ft.	Bbl./ft.
2.375" 4.7# J-55 tbg.	1.901	8100	7700	0.1626	0.02173	0.00387
5.5" 17# J/K-55 csg.	4.892	4910	5320	0.9764	0.1305	0.02324
Annular Capacities						
2.375" tbg. X 5.5" 17# csg.				0.7462	0.0997	0.01776

GEOLOGIC INFORMATION:

Formation	Depth to top, ft.
Uinta	Surface
Green River	1509'
Wasatch	4715'

Tech. Pub. #92 Base of USDW's

USDW Elevation	~500' MSL
USDW Depth	~4558' KBE

PERFORATION DETAIL

Formation	Date	Top	Bottom	SPF	DIA. (in.)	Status
Wasatch	See footnote	5021		2	0.50	Open
Wasatch	See footnote	5023		2	0.50	Open
Wasatch	See footnote	5596		2	0.50	Open
Wasatch	See footnote	5600		2	0.50	Open
Wasatch	See footnote	5606		2	0.50	Open
Wasatch	See footnote	5608		2	0.50	Open
Wasatch	See footnote	5616		2	0.50	Open
Wasatch	See footnote	5619		2	0.50	Open
Wasatch	See footnote	5622		2	0.50	Open
Wasatch	See footnote	5626		2	0.50	Open
Wasatch	See footnote	5761		2	0.50	Open
Wasatch	See footnote	5770		2	0.50	Open
Wasatch	See footnote	5774		2	0.50	Open
Wasatch	See footnote	5777		2	0.50	Open
Wasatch	See footnote	5780		2	0.50	Open
Wasatch	See footnote	5861		2	0.50	Open
Wasatch	See footnote	5864		2	0.50	Open
Wasatch	See footnote	5867		2	0.50	Open
Wasatch	See footnote	5875		2	0.50	Open

Note – Perforations were shot initially on 3/7/1991 and re-shot on 3/8/1991 with 1 spf each time.

WELL HISTORY:

Completion – March 1991

- TD'd on 3/1/1991
- Perforated the gross interval 5021' through 5875' and attempted to break down. Wouldn't break at 5000 psi, so reperforated. Broke down at 5000 psi on second attempt. Balled out using 3% KCl.
- Fractured with 2110 bbl. gel containing 282000# 20/40 mesh sand.
- Tested 900 MCFD, 15 BWPD, 450 psi FTP, 525 psi SICP, 20/64th choke on 7/30/1991.

Workover #1 – December 1995

- Cleaned out to PBTD with a hydrostatic bailer and installed PLE with EOT at 5887.
- Spotted 1000 gal 15% HCl across perforations and let soak.
- Took 16 days of swabbing and working with PL for the well to kick off and RTP.

REMARKS:

- **May have penetrated the top of the Kmv, but this is definitely a Tw only completion. Incorrectly shown as Tw/Kmv on OFM basemap.**
- All sands of interest were completed, no apparent uphole potential.
- **Pressure depleted, no additional potential. Scheduled for 2007 P&A.**

NBU 114 P&A PROCEDURE

GENERAL

- H₂S MAY BE PRESENT. CHECK FOR H₂S AND TAKE APPROPRIATE PRECAUTIONS.
- CEMENT QUANTITIES BELOW ASSUME NEAT CLASS G, YIELD 1.145 CUFT./SX. IF A DIFFERENT PRODUCT IS USED, WELLSITE PERSONNEL ARE RESPONSIBLE FOR CORRECTING QUANTITIES TO YIELD THE STATED SLURRY VOLUME. WHEN SQUEEZING, INCLUDE 10% EXCESS PER 1000' OF DEPTH.
- BRINE WITH A MINIMUM DENSITY OF AT LEAST 9 PPG MUST BE PLACED BETWEEN ALL PLUGS. 10 PPG IS ASSUMED IN THIS PROCEDURE.
- NOTIFY THE BLM AT 435-781-4400 24 HOURS BEFORE MOVING ON LOCATION.

P&A PROCEDURE

1. MIRU. KILL WELL AS NEEDED. ND WH, NU AND TEST BOPE.
2. TOH WITH TUBING. RU WIRELINE AND MAKE A GAUGE RING RUN TO ~5025'.
3. **PLUG #1, PERFORATIONS (TOP PERF @ 5021')**: SET CIBP AT ~5020' AND SPOT 50' (~6 SX. OR ~6.53 CUFT.) CLASS G CEMENT ON TOP. DISPLACE WELL WITH 10 PPG BRINE.
4. **PLUG #2, WASATCH TOP (~4853'), BASE OF USDW'S (~4558')**: SPOT A BALANCED CEMENT PLUG FROM ~4815' – ~4458' USING ~41 SX (~46.59 CUFT.) CLASS G CEMENT. DISPLACE WELL WITH 10 PPG BRINE.
5. **PLUG #3, GREEN RIVER TOP (~1509')**: SPOT A BALANCED CEMENT PLUG FROM ~1609' – ~1409' USING ~23 SX (~26.1 CUFT.) CLASS G CEMENT. DISPLACE WELL WITH 10 PPG BRINE.
6. **PLUG #4, SURFACE**: FILL 5 ½" CASING FROM 300' TO SURFACE WITH ~34 SX (~39.15 CUFT.) OF CLASS G CEMENT.
7. CUT OFF WELLHEAD AND INSTALL MARKER PER BLM GUIDELINES.
8. RDMO. TURN OVER TO OPERATIONS FOR SURFACE REHAB.

ALM – 9/28/05

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING

1. DJJ

2. CDW

X Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

1/6/2006

FROM: (Old Operator):

N2115-Westport Oil & Gas Co., LP
 1368 South 1200 East
 Vernal, UT 84078
 Phone: 1-(435) 781-7024

TO: (New Operator):

N2995-Kerr-McGee Oil & Gas Onshore, LP
 1368 South 1200 East
 Vernal, UT 84078
 Phone: 1-(435) 781-7024

CA No.		Unit:		NATURAL BUTTES UNIT				
WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- a. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- b. If **NO**, the operator was contacted on:
- 5a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- 5b. Inspections of LA PA state/fee well sites complete on: n/a 3 LA wells & all PA wells transferred
- 5c. Reports current for Production/Disposition & Sundries on: ok
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet
- Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006
- Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: n/a
- Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on:

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 5/15/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
- Bond information entered in RBDMS on: 5/15/2006
- Fee/State wells attached to bond in RBDMS on: 5/16/2006
- Injection Projects to new operator in RBDMS on: _____
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: CO1203
- Indian well(s) covered by Bond Number: RLB0005239
- (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- a. The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG
The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

COMMENTS:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State

UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

KERR-McGEE OIL & GAS ONSHORE LP

3a. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off	
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity	
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR	
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon		
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal		

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006. KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

RECEIVED

MAY 10 2006

DIV. OF OIL, GAS & MINING

BLM BOND = C01203

BIA BOND = RLB0005239

APPROVED 5116106

Earlene Russell

**Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician**

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

RANDY BAYNE

Title

DRILLING MANAGER

Signature

Randy Bayne

Date

May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

WESTPORT OIL & GAS COMPANY L.P.

3a. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (Include area code)

(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED

8. Well Name and No.

MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State

UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

APPROVED 5/16/06
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

RECEIVED
MAY 10 2006

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)	Title
BRAD LANEY	ENGINEERING SPECIALIST
Signature	Date
<i>Brad Laney</i>	May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
<i>Brad Laney</i>		5-9-06
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
Colorado State Office
2850 Youngfield Street
Lakewood, Colorado 80215-7076

IN REPLY REFER TO:

CO922 (MM)
3106
COC017387 et. al.

March 23, 2006

NOTICE

Kerr-McGee Oil & Gas Onshore L.P. :
1999 Broadway, Suite 3700 : Oil & Gas
Denver, CO 80202 :

Merger/Name Change - Recognized

On February 28, 2006 this office received acceptable evidence of the following mergers and name conversion:

Kerr-McGee Oil & Gas Onshore L.P., a Delaware Limited Partnership, and Kerr-McGee Oil & Gas Onshore LLC, a Delaware Limited Partnership merger with and into Westport Oil and Gas Company L.P., a Delaware Limited Partnership, and subsequent Westport Oil & Gas Company L.P. name conversion to Kerr-McGee Oil & Gas Onshore L.P.

For our purposes the merger and name conversion was effective January 4, 2006, the date the Secretary of State of Delaware authenticated the mergers and name conversion.

Kerr-McGee Oil & Gas Onshore L.P. provided a list of oil and gas leases held by the merging parties with the request that the Bureau of Land Management change all their lease records from the named entities to the new entity, Kerr-McGee Oil & Gas Onshore L.P. In response to this request each state is asked to retrieve their own list of leases in the names of these entities from the Bureau of Land Management's (BLM) automated LR2000 data base.

The oil and gas lease files identified on the list provided by Kerr-McGee Oil & Gas Onshore L.P. have been updated as to the merger and name conversion. We have not abstracted the lease files to determine if the entities affected by the acceptance of these documents holds an interest in the lease, nor have we attempt to identify leases where the entity is the operator on the ground that maintains vested record title or operating rights interests. If additional documentation, for change of operator, is required you will be contacted directly by the appropriate Field Office. The Mineral Management Services (MMS) and other applicable BLM offices were notified of the merger with a copy of this notice

Please contact this office if you identify additional leases where the merging party maintains an interest, under our jurisdiction, and we will document the case files with a copy of this notice. If the leases are under the jurisdiction of another State Office that information will be forwarded to them for their action.

Three riders accompanied the merger/name conversion documents which will add Kerr-McGee Oil and Gas Onshore LLC as a principal to the 3 Kerr-McGee bonds maintained by the Wyoming State Office. These riders will be forward to them for their acceptance.

The Nationwide Oil & Gas Continental Casualty Company Bond #158626364 (BLM Bond #CO1203), maintained by the Colorado State Office, will remain in full force and effect until an assumption rider is accepted by the Wyoming State Office that conditions their Nationwide Safeco bond to accept all outstanding liability on the oil and gas leases attached to the Colorado bond.

If you have questions about this action you may call me at 303.239.3768.

/s/Martha L. Maxwell
Martha L. Maxwell
Land Law Examiner
Fluid Minerals Adjudication

Attachment:

List of OG Leases to each of the following offices:

MMS MRM, MS 357B-1

WY, UT, NM/OK/TX, MT/ND, WY State Offices

CO Field Offices

Wyoming State Office

Rider #1 to Bond WY2357

Rider #2 to Bond WY1865

Rider #3 to Bond WY1127



United States Department of the Interior



BUREAU OF LAND MANAGEMENT
Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155
<http://www.blm.gov>

IN REPLY REFER TO:
3106
(UT-922)

March 27, 2006

Memorandum

To: Vernal Field Office
From: Chief, Branch of Fluid Minerals
Subject: Merger Approval

Attached is an approved copy of the merger recognized by the Bureau of Land Management, Colorado State Office. We have updated our records to reflect the merger from Westport Oil and Gas Company L.P. into Kerr-McGee Onshore Oil and Gas Company. The merger was approved effective January 4, 2006.

Chief, Branch of
Fluid Minerals

Enclosure

Approval letter from BLM COSO (2 pp)

cc: MMS, Reference Data Branch, James Sykes, PO Box 25165, Denver CO 80225
State of Utah, DOGM, Attn: Earlene Russell, PO Box 145801, SLC UT 84114
Teresa Thompson
Joe Incardine
Connie Seare
Dave Mascarenas
Susan Bauman

RECEIVED

MAR 28 2006

U.S. DEPT. OF THE INTERIOR

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: November 30, 2000

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. Lease Serial No.
UTU-01393D

1a. Type of Well Oil Well Gas Dry Other
 b. Type of Completion: New Work Over Deepen Plug Back Diff. Reserv.
 Other **PLUG AND ABANDON**

6. If Indian, Allottee or Tribe Name

2. Name of Operator
KERR MCGEE OIL & GAS ONSHORE LP

7. Unit or CA Agreement Name and No.
UNIT #891008900A

3. Address
1368 SOUTH 1200 EAST VERNAL, UTAH 84078

3a. Phone No. (include area code)
(435)-781-7024

8. Lease Name and Well No.
NBU 114

4. Location of Well (Report locations clearly and in accordance with Federal requirements)*
At surface SWSW 767'FSL, 526'FWL

9. API Well No.
4304731923

At top prod. interval reported below

10. Field and Pool, or Exploratory
NATURAL BUTTES

At total depth

11. Sec., T., R., M., or Block and Survey or Area SEC 5, T10S, R21E

14. Date Spudded 15. Date T.D. Reached 16. Date Completed
 D & A Ready to Prod.
05/10/06

12. County or Parish UTAH 13. State UTAH

17. Elevations (DF, RKB, RT, GL)*
5046'GL

18. Total Depth: MD MD TVD 19. Plug Back T.D.: MD MD TVD 20. Depth Bridge Plug Set: MD MD TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
N/A

22. Was well cored? No Yes (Submit copy)
Was DST run? No Yes (Submit copy)
Directional Survey? No Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Set (MD)

25. Producing Intervals 26. Perforation Record

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) N/A						
B)						
C)						
D)						

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and type of Material
N/A	

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						P&A
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Well Status	
			→						P&A

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Well Status	
			→						

RECEIVED
MAY 26 2006

DIV. OF OIL, GAS & MINING

(See instructions and spaces for additional data on reverse side)

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	

29. Disposition of Gas (Sold, used for fuel, vented, etc.)

PLUG AND ABANDON

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth

32. Additional remarks (include plugging procedure):

05/17/2006: MIRU P&A EQUIP. TOH/TBG TIH & SET CIBP @4941' ROLL HOLE 10 PPG FLUID. PMP 60 SX TOC @4409' TOH TO 1595' MIX AND PMP 25 SX BALANCE PLUG TOC 1371' TOH ND WH & NOP TIH TO 301' MIX AND PMP 40 SX GOOD CMT TO SURFACE DIG OUT AND CUT OFF WELL HEAD TOP OFF ANNULAS W/20 SX WELD ON PLATE RDMO. **THE SUBJECT WELL LOCATION WAS PLUG AND ABANDON ON 05/17/2006.**

33. Circle enclosed attachments:

- 1. Electrical/Mechanical Logs (1 full set req'd.)
- 2. Geologic Report
- 3. DST Report
- 4. Directional Survey
- 5. Sundry Notice for plugging and cement verification
- 5. Core Analysis
- 7. Other:

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) SHEILA UPCHEGO Title REGULATORY ANALYST
 Signature  Date 5/18/2006

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE – Other instructions on reverse side

5. Lease Serial No.
UTU-01393D

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
UNIT #891008900A

8. Well Name and No.
NBU 114

9. API Well No.
4304731923

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH COUNTY, UTAH

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR-McGEE OIL & GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SWSW SECTION 5, T10S, R21E 767'FSL, 526'FWL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off	
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity	
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____	
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon		
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal		

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompletable horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletable in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

05/17/2006: MIRU P&A EQUIP. TOH/TBG TIH & SET CIBP @4941' ROLL HOLE 10 PPG FLUID. PMP 60 SX TOC @4409' TOH TO 1595' MIX AND PMP 25 SX BALANCE PLUG TOC 1371' TOH ND WH & BOP TIH TO 301' MIX AND PMP 40 SX GOOD CMT TO SURFACE. DIG OUT AND CUT OFF WELL HEAD. TOP OFF ANNULAS W/20 SX WELD ON PLATE RDMO.

THE SUBJECT WELL LOCATION WAS PLUG AND ABANDON ON 05/17/2006

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Sheila Upchego	Title Regulatory Analyst
Signature 	Date May 18, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED
MAY 26 2006
DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: U-01303D
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: NBU 114
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.	9. API NUMBER: 43047319230000
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	PHONE NUMBER: 720 929-6515 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0767 FSL 0526 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSW Section: 05 Township: 10.0S Range: 21.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 2/21/2011 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input checked="" type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

THE SUBJECT WELL WAS PLUGGED AND ABANDONED ON 5/17/06. THE OPERATOR REQUESTS AUTHORIZATION TO RECLAIM THIS WELL LOCATION. ATTACHED TO THIS SUNDRY NOTICE IS THE FINAL RECLAMATION PLAN. THANK YOU.

Accepted by the
 Utah Division of
 Oil, Gas and Mining
FOR RECORD ONLY

NAME (PLEASE PRINT) Danielle Piernot	PHONE NUMBER 720 929-6156	TITLE Regulatory Analyst
SIGNATURE N/A		DATE 2/15/2011

NBU 114 Final Reclamation Plan

*Prepared by:
Anadarko Petroleum Corporation
June 2010*



Introduction

The NBU 114 (API # 43-047-31923) is a conventional natural gas well located in Uintah County, UT approximately 9 miles southeast of the town of Ouray, UT. The location is in section 5 of township 10S range 21E.

Final Reclamation Objectives

After production and operations cease, the goal of final reclamation is to return the land to a condition that approximates that which existed prior to disturbance and maintain a stable and productive condition compatible with the land use. The goal is not to achieve full ecological restoration of the site, but to achieve short-term stability, visual, hydrological and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

Site Preparation and Revegetation

Earthwork for final reclamation will be completed within six months of well plugging, if weather allows for such activities to take place. Disturbed areas will be revegetated after the site has been prepared. Site preparation will include respreading topsoil to an adequate depth and may also include ripping, tilling, disking on contour, dozer track-imprinting, and/or other accepted reclamation site preparation practices. Activities such as seeding and vegetation re-establishment must be completed within the appropriate season for such activities not necessarily immediately after earthwork has been completed. Fall seeding can be conducted after August 15 until ground frost. The long term objective of final reclamation is for eventual ecosystem restoration including the restoration of the natural vegetative community, hydrology and wildlife habitats. Following well plugging, well sites that do not blend with the surrounding landform will be re-contoured.

Well Site Reclamation

Following well plugging, all surface equipment will be removed. The NBU 114 will be re-contoured to blend with the surrounding landform and topography. Topsoil will be stripped before re-contouring and re-spread over the entire location.

Road Reclamation

All roads within the project area will be reclaimed unless the surface management agency or surface owner requests that they be left unreclaimed. Road reclamation will include recontouring and seeding and may also include ripping, scarifying or disking. The NBU 114 has approximately 500ft of access road to be reclaimed.

Reclamation of Other Associated Facilities

There are no other associated facilities with this well requiring reclamation.

Soil Preparation

Soil preparation will be conducted using a disk for areas in need of more soil preparation following site preparation. This will provide primary soil tillage to a depth no greater than 6 inches. Prior to reseeding, compacted areas will be scarified by ripping or chiseling to loosen compacted soils. Scarification will promote water infiltration; improve soil aeration and root penetration.

Seed Mix and Seeding

Common Name	PLS LBS/Acre
Indian Ricegrass	3
Sandberg bluegrass	0.75
Bottlebrush squirreltail	0.5
Great Basin Wildrye	0.5
Western wheatgrass	1.5
Winterfat	0.25
Shadscale	1.5
Four-wing saltbush	0.75
Scarlet Globemallow	0.5
Rocky Mtn. Bee Plant	.75
Forage Kochia	0.25
	9.75

The NBU 114 will be seeded with a no-till rangeland style seed drill with a “picker box” in order to seed “fluffy” seed. In areas that drill seeding may not be the preferred method, the seed will be broadcast and then raked into the ground at double the rate of drill seeding. All seed will be certified and tags will be kept on hand by Anadarko Petroleum Corporation. Every effort will be made to obtain “cheat grass free seed”.

Soil Amendments and Stabilization

Additional soil amendments and stabilization may be required on sites with poor soils and greater erosion potential. The following soil amendments may be used on this location:

Sustane is an organic fertilizer that will be applied at the rate 1,800 – 2,100 lbs/acre with seed. Sustane granulated slow release fertilizers replenish the soil with essential nutrients and a rich supply of humus as required for long term soil building and plant growth. Sustane can be dry broadcast or applied with hydro-seeding equipment.

Erosion Control

The slopes will be stabilized using materials specifically designed to prevent erosion in order to allow permanent establishment of vegetation. These materials will include, but are not limited to erosion control blankets, hydro-mulch, or soil amendments such as erosion control polymers

Monitoring

Monitoring of the NBU 114 will be completed annually during the growing season and actions to ensure reclamation success will be taken as needed. During the first 2 growing seasons an ocular methodology will be used to determine the success of the reclamation activities. During the 3rd growing season a quantitative method of 200 point line intercept basal monitoring will be conducted in order to see if the reclaimed area has met 30% desirable basal cover when compared to the native vegetation. If 30% has not been met additional seeding/reclamation efforts may be necessary (Green River District Reclamation Guidelines). Monitoring will continue until the reclaimed area reaches 75% basal cover of desirable vegetation when compared to the undisturbed adjacent native vegetation.

All monitoring reports will be submitted to the Vernal BLM no later than March 31 of the year following the data collection. (Data collected in 2010 will be submitted in 2011 and so forth.) These reports will be submitted electronically in the form of a geodatabase for use in a geographic information system (GIS).

Noxious Weeds

Noxious weeds will be controlled as needed on the location. Monitoring and management of noxious and/or invasive weeds of concern will be completed annually until the project is deemed successfully reclaimed by the surface management agency and/or owner according to the Anadarko Integrated Weed Management Plan. Noxious weed infestations will be mapped using a GPS unit

and submitted to the BLM with information required in the Vernal BLM Surface Disturbance Weed Policy. If herbicide is to be applied it will be done according to an approved Pesticide Use Permit (PUP). Anadarko submits a field wide PUP annually, and this location will fall under the PUP. All pesticide applications will be recorded using a Pesticide Application Record (PAR) and will be submitted along with a Pesticide Use Report (PUR) annually prior to Dec. 31. All weed management will be done in accordance with the Vernal BLM Surface Disturbance Weed Policy.

Inspection and Final Abandonment Approval

When the NBU 114 has reached the final abandonment objectives, the operator will file a Final Abandonment Notice (FAN). Upon receipt of the FAN a site inspection will be completed by the management agency to ensure reclamation is fully successful and approve the FAN. The operator may request termination of the bond on the Final Abandonment Notice.