

**UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT**

**APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK**

1a. TYPE OF WORK  
 DRILL       DEEPEN       PLUG BACK

b. TYPE OF WELL  
 OIL WELL       GAS WELL       OTHER       SINGLE ZONE       MULTIPLE ZONE

2. NAME OF OPERATOR  
 Coastal Oil & Gas Corporation

3. ADDRESS OF OPERATOR  
 P. O. Box 749, Denver, Colorado 80201-0749

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)\*  
 At surface  
 2093' FNL, 1724' FEL (SW $\frac{1}{4}$ NE $\frac{1}{4}$ ) Section 9, T10S, R21E  
 At proposed prod. zone  
 Same As Above

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE\*  
 Approximately Ten (10) Miles Southeast of Ouray, Utah

15. DISTANCE FROM PROPOSED\* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any)      1724'

16. NO. OF ACRES IN LEASE      400

17. NO. OF ACRES ASSIGNED TO THIS WELL      80

18. DISTANCE FROM PROPOSED LOCATION\* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT.      1100'±

19. PROPOSED DEPTH      5850' *WSTC*

20. ROTARY OR CABLE TOOLS      Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)  
 5060' GR

22. APPROX. DATE WORK WILL START\*  
 September 10, 1991

5. LEASE DESIGNATION AND SERIAL NO.  
 UTU-01416

6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
 Not Applicable

7. UNIT AGREEMENT NAME  
 Natural Buttes

8. FARM OR LEASE NAME  
 CIGE

9. WELL NO.  
 150-9-10-21

10. FIELD AND POOL, OR WILDCAT  
 Natural Buttes *(a30)*

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
 Section 9, T10S, R21E

12. COUNTY OR PARISH      13. STATE  
 Uintah      Utah

23. (ALL NEW) PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12-1/4"	8-5/8" K-55	24.0#	0- 250'	180 sx Circ. to Surface *
7-7/8"	5-1/2" K-55	17.0#	0-5850'	545 sx Circ. to Surface *

**RECEIVED**

JUL 25 1991

DIVISION OF  
OIL GAS & MINING

\* Cement volumes may change due to hole size.  
Calculate from Caliper log.

EIGHT-POINT RESOURCE PROTECTION PLAN ATTACHED.

I hereby certify that Coastal Oil & Gas Corporation is authorized by the proper Lease Interest Owners to conduct lease operations associated with this Application for Permit to Drill the CIGE #150-9-10-21, Federal Lease # UTU-01416. Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by Coastal Oil & Gas Corporation, Nationwide Bond # CO-0018, who will be responsible for compliance with all the terms and conditions of that portion of the lease associated with this Application.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED Charles E Mowry TITLE District Drilling Manager DATE July 16, 1991  
 (This space for Federal or State office use)

PERMIT NO. 13-047-20058 APPROVAL DATE \_\_\_\_\_

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY: \_\_\_\_\_


APPROVED BY THE STATE  
OF UTAH DIVISION OF  
OIL, GAS, AND MINING  
DATE: 8-6-91  
BY: John Matthews  
WELL SPACING: 645-2-3

\*See Instructions On Reverse Side

# T10S, R21E, S.L.B.&M.


## COASTAL OIL & GAS CORP.

Well location, CIGE #150-9-10-21, located as shown in the SW 1/4 NE 1/4 of Section 9, T10S, R21E, S.L.B.&M. Uintah County, Utah.

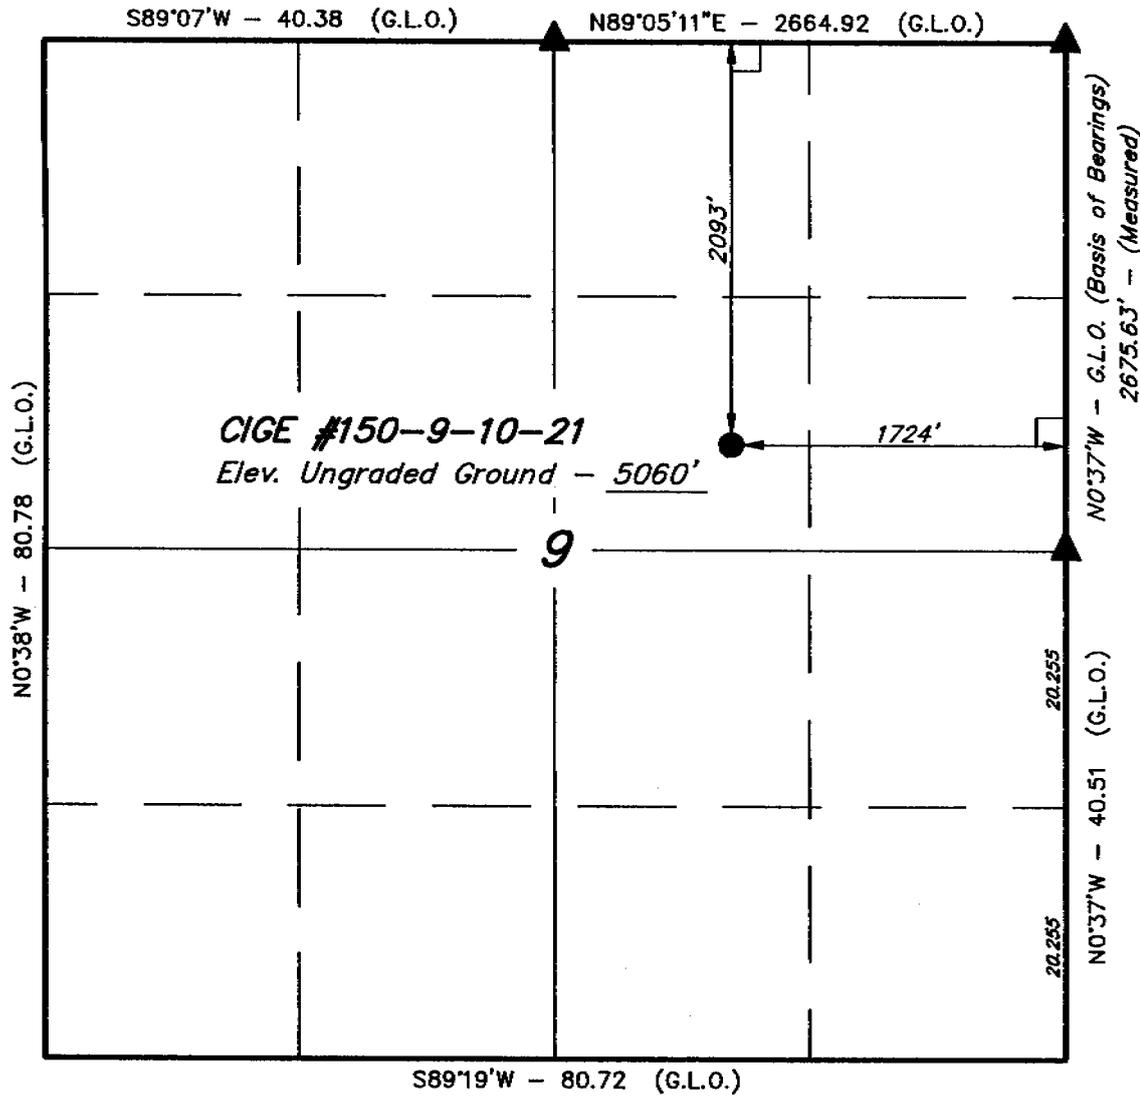

### BASIS OF ELEVATION

SPOT ELEVATION AT THE SW CORNER OF SECTION 9, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5100 FEET.



SCALE

### CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

*Robert L. King*  
 REGISTERED LAND SURVEYOR  
 REGISTRATION NO. 5709  
 STATE OF UTAH

**UINTAH ENGINEERING & LAND SURVEYING**  
 P. O. BOX 1758 - 85 SOUTH - 200 EAST  
 VERNAL, UTAH - 84078

SCALE 1" = 1000'	DATE 6-20-91
PARTY D.A. D.S. R.E.H.	REFERENCES G.L.O. PLAT
WEATHER HOT	FILE COASTAL OIL & GAS CORP.

▲ = SECTION CORNERS LOCATED. (Brass Caps)

COASTAL OIL & GAS CORPORATION  
Lease #UTU-01416, CIGE #150-9-10-21  
SW $\frac{1}{4}$ NE $\frac{1}{4}$ , Section 9, T10S, R21E  
Uintah County, Utah

Drilling Prognosis

1. Estimated Tops of Important Geologic Markers:

Uinta	Surface	Wasatch	4570'
Green River	1570'	Total Depth	5850'

2. Estimated Depths of Anticipated Water, Oil, Gas or Mineral Formations:

Wasatch                    4570'                    Gas (Primary Objective)

If any shallow water zones are encountered, they will be adequately protected and reported; none anticipated. All potentially productive hydrocarbon zones will be cemented off.

3. Pressure Control Equipment: (Schematic Attached)

A. Type: 11" Double Gate Hydraulic.

The Blow-Out Preventer will be equipped as follows:

1. One (1) blind ram (above).
2. One (1) pipe ram (below).
3. Kill line (2-inch minimum).
4. One (1) kill line valve (2-inch minimum).
5. One (1) choke line valve.
6. Two (2) adjustable chokes.
7. Upper kelly cock valve with handle available.
8. Safety valve & subs to fit all drill strings in use.
9. 2-inch (minimum) choke line.
10. Pressure gauge on choke manifold.

B. Pressure Rating: 2,000 psi

C. Testing Procedure:

At a minimum, the BOP, choke manifold, and related equipment will be pressure tested to the approved working pressure of the BOP stack (if isolated from the surface casing by a test plug) or to 70% of the internal yield strength of the surface casing (if the BOP is not isolated from the casing by a test plug). Pressure will be maintained for a period of at least ten (10) minutes or until the requirements of the test are met, whichever is longer.

3. Pressure Control Equipment:

C. Testing Procedure: Continued

At a minimum, the above pressure test will be performed:

1. When the BOP is initially installed;
2. Whenever any seal subject to test pressure is broken;
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition to the above, the pipe and blind rams will be activated each trip, but not more than once each day.

All BOP drills and tests will be recorded in the IADC driller's log.

D. Choke Manifold Equipment:

All choke lines will be straight lines unless turns use tee blocks or are targeted with running tees, and will be anchored to prevent whip and vibration.

E. Accumulator:

The accumulator will have sufficient capacity to close all BOP's and retain 200 psi above precharge. Nitrogen bottles which meet the manufacturer's specifications will be used as the backup to the required independent power source. The accumulator precharge pressure test will be conducted prior to connecting the closing unit to the BOP stack and at least once every six (6) months thereafter. The accumulator pressure will be corrected if the measured precharge pressure is found to be above or below the maximum or minimum limits specified in Onshore Operating Order #2.

F. Special Drilling Operations:

In addition to the equipment already specified in Items A through E, above, the following equipment will be in place and operational during air/gas drilling:

1. Properly lubricated and maintained rotating head.
2. Spark arresters on engines or water cooled exhaust.
3. Blooie line discharge 100 feet from well bore and securely anchored.

3. Pressure Control Equipment:

F. Special Drilling Operations: Continued

4. Straight run on blooie line.
5. Deduster equipment (not required for aerated water system).
6. All cuttings and circulating medium(s) shall be directed into a reserve or blooie pit.
7. Float valve above bit.
8. Automatic igniter or continuous pilot light on the blooie line (not required for aerated water system).
9. Compressors located in the opposite direction from the blooie line and at a minimum of 100 feet from the well bore.
10. Mud circulating equipment, water, and mud materials (does not have to be pre-mixed) sufficient to maintain the capacity of the hole and circulating tanks or pits.

G. Miscellaneous Information:

The Blow-Out Preventer and related pressure control equipment will be installed, tested and maintained in compliance with the specifications in and requirements of Onshore Operating Order #2.

The choke manifold and BOP extension rods with hand wheels will be located outside the rig sub-structure. The hydraulic BOP closing unit will be located at least twenty-five (25) feet from the well head but readily accessible to the driller.

Exact locations and configurations of the hydraulic BOP closing unit will depend upon the particular rig contracted to drill this hole.

A flare line will be installed after the choke manifold, extending 100 feet (minimum) from the center of the drill hole to a separate flare pit.

4. The Proposed Casing and Cementing Program: (All New)

A. Casing Program

<u>Hole Size</u>	<u>Casing Size</u>	<u>Wt./Ft.</u>	<u>Grade</u>	<u>Joint</u>	<u>Depth Set</u>
12-1/4"	8-5/8"	24.0#	K-55	ST&C	0- 250'

4. The Proposed Casing and Cementing Program: (All New)

A. Casing Program - Continued

<u>Hole Size</u>	<u>Casing Size</u>	<u>Wt./Ft.</u>	<u>Grade</u>	<u>Joint</u>	<u>Depth Set</u>
7-7/8"	5-1/2"	17.0#	K-55	LT&C	0-5850'

Casing string(s) will be pressure tested to 0.22 psi per foot, or 1500 psi (not to exceed 70% of the internal yield strength of the casing), whichever is greater, after cementing and prior to drilling out from under the casing shoe.

B. Cementing Program

Surface Casing : Cement with approximately 180 sx Class "G" cement + additives, circulated to surface with 100% excess.

Production Casing : Lead with approximately 350 sx Halliburton Silica "Lite" cement with 4% Gel, 4% CaCl<sub>2</sub>, 0.3 % Halad-413 and 2.0#/sx Granulite TR; tail with approximately 195 sx Class "G" cement + additives. Cement will be circulated back to surface with 30% excess.

Actual cement volumes to be required will be determined from the caliper log.

All waiting on cement (WOC) times will be adequate to achieve a minimum of 500 psi compressive strength at the casing shoe prior to drilling out.

5. Mud Program: (Visual Monitoring)

<u>Interval</u>	<u>Type</u>	<u>Weight</u>	<u>Viscosity</u>	<u>Fluid Loss</u>
0-5850'	Aerated Water	-----	-----	-----

Sufficient quantities of mud materials will be maintained or readily accessible for the purpose of assuring well control during the course of drilling operations.

6. Evaluation Program:

Logs : DIL-Caliper : 5850' - Surface  
FDC-CNL : 5850' - 1500'

DST's : None anticipated.

Cores : None anticipated.

The proposed evaluation program may change at the discretion of the wellsite geologist, with prior approval from the Authorized Officer, Bureau of Land Management.

Stimulation : No stimulation or frac treatment has been formulated for this test at this time. The drill site, as approved, will be of sufficient size to accommodate all completion activities.

Whether the well is completed as a dry hole or as a producer, Well Completion and Recompletion Report and Log (Form 3160-4) will be submitted to the Book Cliffs Resource Area Office not later than thirty (30) days after the completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164.

Two (2) copies of all logs, core descriptions, core analyses, well test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the Authorized Officer, Book Cliffs Resource Area Office, Bureau of Land Management, 170 South 500 East, Vernal, Utah 84078, Phone: (801) 789-1362.

7. Abnormal Conditions:

No abnormal temperatures or pressures are anticipated. No H<sub>2</sub>S has been encountered in or known to exist from previous wells drilled to similar depths in the general area.

Maximum anticipated bottom hole pressure equals approximately 2,720 psi (calculated at 0.465 psi/foot) and maximum anticipated surface pressure equals approximately 1,433 psi (bottom hole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. Anticipated Starting Dates and Notification of Operations:

A. Drilling Activity

Anticipated Commencement Date : September 10, 1991  
Drilling Days : Approximately 10 Days  
Completion Days : Approximately 7 days

B. Notification of Operations

The Book Cliffs Resource Area Office, Bureau of Land Management will be notified at least twenty-four (24) hours PRIOR to the commencement of the following activities:

1. Spudding of the well. This oral report will be followed up with a Sundry Notice (Form 3160-5);
2. initiating pressure tests of the blow-out preventer and related equipment;
3. running casing and cementing of ALL casing strings.

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in suspended status without prior approval of the Authorized Officer. If operations are to be suspended, prior approval of the Authorized Officer will be obtained and notification given before resumption of operations.

In accordance with Onshore Operating Order #1, this well will be reported on MMS Form 3160-6, "Monthly Report of Operations", starting with the month in which operations commence and continuing each month until the well is physically plugged and abandoned. This report will be filed directly with the Royalty Management Program, Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217.

Immediate Report: spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the provisions of NTL-3A or its current revision.

8. Anticipated Starting Dates and Notification of Operations:

B. Notification of Operations - Continued

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed for prior approval of the Authorized Officer, and all conditions of this approved plan will be applicable during all operations conducted with the replacement rig.

Should the well be successfully completed for production, the Authorized Officer will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communication no later than five (5) business days following the date on which the well is placed on production.

Pursuant to NTL-2B, with the approval of the Authorized Officer, produced water may be temporarily disposed of into the reserve pit for a period of up to ninety (90) days. During this period so authorized, an application for approval of the permanent disposal method, along with the required water analysis and other information, must be submitted to the Authorized Officer.

Pursuant to NTL-4A, lessees and operators are authorized to vent/flare gas during initial well evaluation tests, not exceeding a period of thirty (30) days or the production of fifty (50) MMCF of gas, whichever occurs first. An application must be filed with the Authorized Officer, and approval received, for any venting/flaring of gas beyond the initial thirty (30) day or otherwise authorized test period.

A schematic facilities diagram as required by 43 CFR 3162.7-2, 3162.7-3, and 3162.7-4 shall be submitted to the Vernal District Office within thirty (30) days of installation or first production, whichever occurs first. All site security regulations as specified in 43 CFR 3162.7 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-4.

A first production conference will be scheduled within fifteen (15) days after receipt of the first production notice.

8. Anticipated Starting Dates and Notification of Operations:

B. Notification of Operations - Continued

No well abandonment operations will be commenced without the prior approval of the Authorized Officer. In the case of newly-drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the Authorized Officer.



A "Notice of Intention to Abandon" (Form 3160-5) will be filed with the Authorized Officer within fifteen (15) days following the granting of oral approval to plug and abandon.

Upon completion of approved plugging, a regulation marker will be erected in accordance with 43 CFR 3162.6. The following information will be permanently placed on the marker with a plate, cap, or beaded-on with a welding torch: "Fed" or "Ind", as applicable; Company Name, Well Name and Number, Location by Quarter/Quarter, Section, Township, Range, and Federal or Indian Lease Number.

A "Subsequent Report of Abandonment" (Form 3160-5) will be submitted within thirty (30) days following the actual plugging of the well bore. This report will indicate where plugs were placed and the current status of surface restoration operations. If surface restoration has not been completed at that time, a follow-up report on Form 3160-5 will be filed when all surface restoration work has been completed and the location is considered ready for final inspection. Final abandonment will not be approved until the surface reclamation work required by the approved Application for Permit to Drill has been completed to the satisfaction of the Authorized Officer or his representative, or the appropriate Surface Management Agency.

Pursuant to Onshore Operating Order #1, lessees and operators have the responsibility to see that their exploration, development, production, and construction operations are conducted in such a manner which conforms with applicable Federal laws and regulations and with State and local laws and regulations to the extent that such State and local laws are applicable to operations on Federal and Indian lands.

# BOP STACK

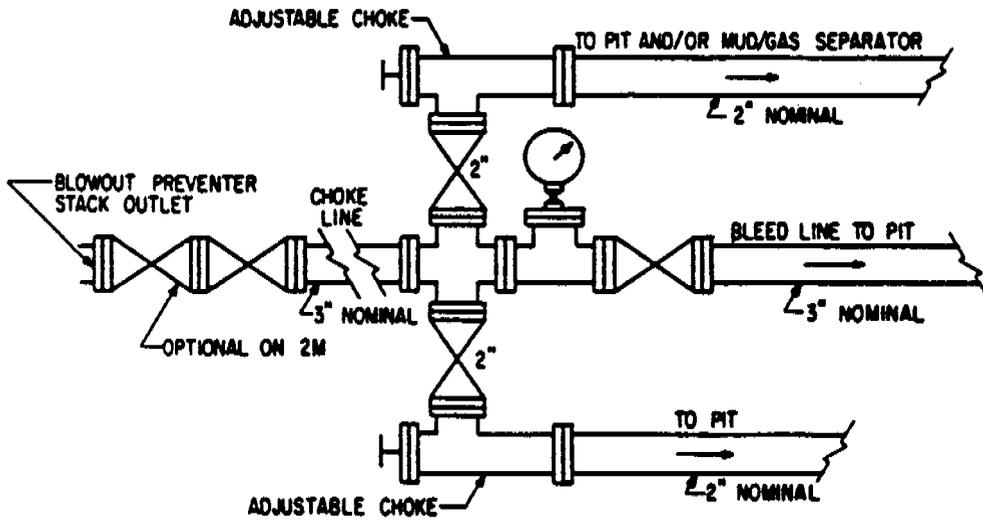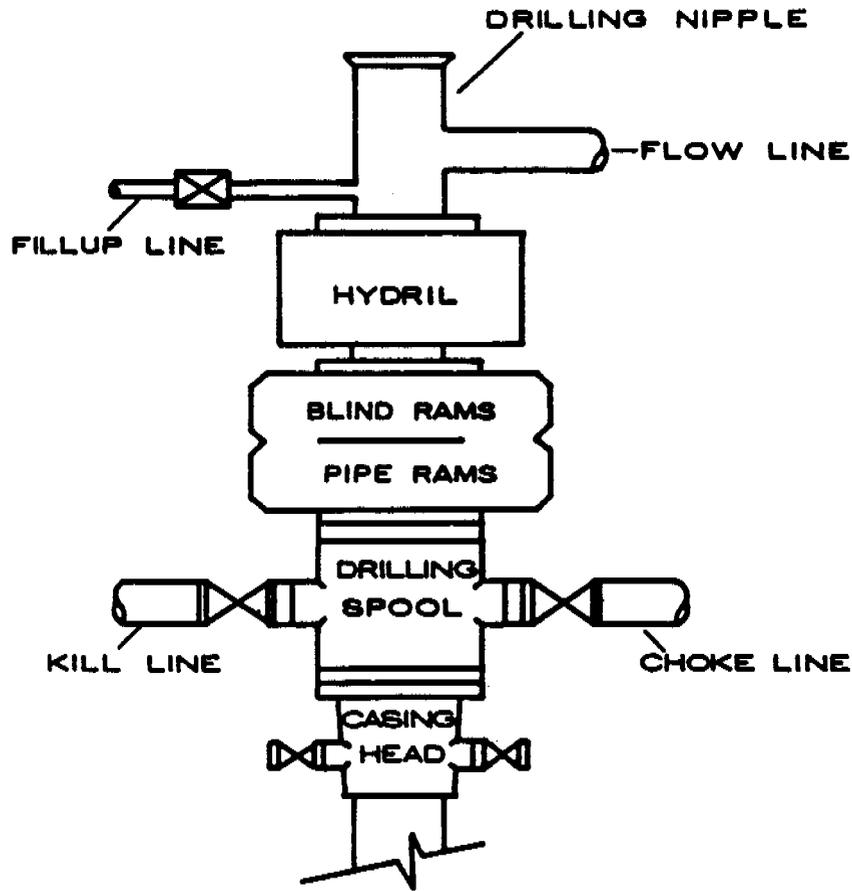

COASTAL OIL & GAS CORPORATION  
Lease #UTU-01416, CIGE #150-9-10-21  
SW $\frac{1}{4}$ NE $\frac{1}{4}$ , Section 9, T10S, R21E  
Uintah County, Utah

Multi-Point Surface Use and Operations Plan

1. Existing Roads: Refer to Maps "A" & "B" (shown in ORANGE)
  - A. The proposed well site is staked and four 200-foot reference stakes are present.
  - B. To reach the location from the town of Vernal, Utah; proceed generally southwest approximately 14.0 miles on U.S. Highway 40 (a paved U.S. highway), thence generally south approximately 17.0 miles on Utah Highway 88 (a paved state highway) to the community of Ouray, thence generally south approximately 11.5 miles on the Seep Ridge Road (an existing, upgraded Uintah County road), thence generally east/southeast approximately 4.1 miles on an existing, upgraded oilfield road (crowned & ditched with a gravel surface), thence generally north-east approximately 1.5 miles on an existing, upgraded oilfield road (crowned & ditched with a gravel surface), thence generally west/northwest approximately 0.8 miles on an existing, upgraded oilfield road (crowned & ditched with a gravel surface), thence generally west approximately 500 feet to the proposed CIGE #150-9-10-21 well location.
  - C. Access roads - refer to Maps "A" and "B".
  - D. Access roads within a one (1) mile radius - refer to Map "B".
  - E. The existing gravel roads will be maintained in the same or better condition as existed prior to the commencement of operations and said maintenance will continue until final abandonment and reclamation of the CIGE #150-9-10-21 well location.
  
2. Planned Access Roads: Refer to Map "B" (Shown in GREEN)

Approximately 500 feet of new road construction will be required for access to the proposed CIGE #150-9-10-21 well location.

  - A. Width - maximum 30-foot overall right-of-way with an 18-foot road running surface, crowned & ditched.
  - B. Construction standard - the access road will be constructed in accordance with Bureau of Land Management Roving Guidelines established for oil and gas exploration and development activities as referenced in the joint BLM/USFS publication: Surface Operating Standards for Oil and Gas Exploration and Development, Third Edition.

2. Planned Access Roads: Continued

- B. Construction standard - the access road will be constructed to meet the standards of the anticipated traffic flow and all-weather requirements. Construction will include ditching, draining, graveling, crowning, and capping the roadbed as necessary to provide a well constructed and safe road.

Prior to construction/upgrading, the roadway shall be cleared of any snow cover and allowed to dry completely.

Traveling off of the thirty (30) foot right-of-way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or the accumulation of debris in the drainage crossing nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at a frequent intervals by means of cutouts.

Upgrading shall not be allowed during muddy conditions.

Should mud holes develop, they shall be filled in and detours around them avoided.

- C. Maximum grade - 2%.
- D. Turnouts - turnouts will be constructed along the access route as necessary or required to allow for the safe passage of traffic. None anticipated at this time.
- E. Drainage design - the access road will be crowned, ditched, and water turnouts installed as necessary to provide for proper drainage along the access road route.
- F. Culverts, cuts and fills - no culverts will be required. There are no major cuts and/or fills on/along the proposed access road route.
- G. Surface materials - any construction materials which may be required for surfacing of the access road will be purchased from a local contractor having a permitted source of materials in the area, if required by the Authorized Officer, Bureau of Land Management. None anticipated at this time.

2. Planned Access Roads: Continued

- H. Gates, cattleguards or fence cuts - none required.
- I. Road maintenance - during both the drilling and production phase of operations, the road surface and shoulders will be kept in a safe and useable condition and will be maintained in accordance with the original construction standards. All drainage ditches and culverts will be kept clear and free-flowing, and will also be maintained in accordance with the original construction standards. The access road right-of-way will be kept free of trash during operations.
- J. The proposed access route has been centerline staked.

3. Location of Existing Wells Within a One-Mile Radius:

Please Refer to Map "C"

- A. Water wells - none known.
- B. Abandoned wells - none known.
- C. Temporarily abandoned wells - none known.
- D. Disposal wells - none known.
- E. Drilling wells - none known.
- F. Producing wells -
  - C SW $\frac{1}{4}$ , Section 3, T10S, R21E.
  - NE $\frac{1}{4}$ SE $\frac{1}{4}$ , Section 4, T10S, R21E.
  - SW $\frac{1}{4}$ SE $\frac{1}{4}$ , Section 4, T10S, R21E.
  - C SW $\frac{1}{4}$ , Section 4, T10S, R21E.
  - SE $\frac{1}{4}$ SE $\frac{1}{4}$ , Section 5, T10S, R21E.
  - SE $\frac{1}{4}$ NE $\frac{1}{4}$ , Section 8, T10S, R21E.
  - NW $\frac{1}{4}$ SE $\frac{1}{4}$ , Section 8, T10S, R21E.
  - SE $\frac{1}{4}$ NW $\frac{1}{4}$ , Section 9, T10S, R21E.
  - SE $\frac{1}{4}$ SW $\frac{1}{4}$ , Section 9, T10S, R21E.
  - NE $\frac{1}{4}$ NE $\frac{1}{4}$ , Section 9, T10S, R21E.
  - NE $\frac{1}{4}$ SE $\frac{1}{4}$ , Section 9, T10S, R21E.
  - SW $\frac{1}{4}$ SE $\frac{1}{4}$ , Section 9, T10S, R21E.
  - NW $\frac{1}{4}$ NW $\frac{1}{4}$ , Section 15, T10S, R21E.
- G. Shut-in wells - none known.
- H. Injection wells - none known.
- I. Monitoring wells - none known.

4. Location of Existing and/or Proposed Facilities Owned by Coastal Oil & Gas Corporation Within a One-Mile Radius:

A. Existing

- 1. Tank batteries -
  - C SW $\frac{1}{4}$ , Section 3, T10S, R21E.
  - NE $\frac{1}{4}$ SE $\frac{1}{4}$ , Section 4, T10S, R21E.
  - SW $\frac{1}{4}$ SE $\frac{1}{4}$ , Section 4, T10S, R21E.

4. Location of Existing and/or Proposed Facilities Owned by Coastal Oil & Gas Corporation Within a One-Mile Radius:

A. Existing - Continued

1. Tank batteries - C SW $\frac{1}{4}$ , Section 4, T10S, R21E.  
SE $\frac{1}{4}$ SE $\frac{1}{4}$ , Section 5, T10S, R21E.  
SE $\frac{1}{4}$ NE $\frac{1}{4}$ , Section 8, T10S, R21E.  
NW $\frac{1}{4}$ SE $\frac{1}{4}$ , Section 8, T10S, R21E.  
SE $\frac{1}{4}$ NW $\frac{1}{4}$ , Section 9, T10S, R21E.  
SE $\frac{1}{4}$ SW $\frac{1}{4}$ , Section 9, T10S, R21E.  
NE $\frac{1}{4}$ NE $\frac{1}{4}$ , Section 9, T10S, R21E.  
NE $\frac{1}{4}$ SE $\frac{1}{4}$ , Section 9, T10S, R21E.  
SW $\frac{1}{4}$ SE $\frac{1}{4}$ , Section 9, T10S, R21E.  
NW $\frac{1}{4}$ NW $\frac{1}{4}$ , Section 15, T10S, R21E.
2. Production facilities - same as Item #4A1, above.
3. Oil gathering lines - none.
4. Gas gathering lines - same as Item #4A1, above.

B. New Facilities Contemplated

1. All production facilities will be located on the disturbed portion of the well pad and at a minimum of twenty-five (25) feet from the toe of the back-slope or top of the fill slope.
2. The production facilities (consisting primarily of a christmas tree at the well head, dehydration unit, and emergency pit) will require an area approximately 300' X 135'. A diagram showing the proposed production facility layout will be submitted to the Authorized Officer via "Sundry Notice" (Form 3160-5) for approval of subsequent installation operations.
3. Production facilities will be accommodated on the existing well pad. Construction materials required for installation of the production facilities will be obtained from the site; any additional materials required will be purchased from a local supplier having a permitted (private) source of materials within the area.

A dike will be constructed completely around those production facilities which contain fluids (i.e. production tanks, produced water tanks and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

4. Location of Existing and/or Proposed Facilities Owned by Coastal Oil & Gas Corporation Within a One-Mile Radius:

B. New Facilities Contemplated - Continued

4. All permanent (on-site for six months or longer) above-the-ground structures constructed or installed including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Five (5) State Rocky Mountain Interagency Committee.

All production facilities will be painted within six (6) months of installation. Facilities required to comply with Occupational Health and Safety Act Rules and Regulations will be excluded from this painting requirement.

The required paint color is Carlsbad Canyon, Munsell standard color number 2.5Y 6/2.

5. If at any time the facilities located on public lands and authorized by the terms of the lease are no longer included in the lease (due to a contraction in the unit or other lease or unit boundary change), the Bureau of Land Management will process a change in authorization to the appropriate statute). The authorization will be subject to the appropriate rental or other financial obligation as determined by the Authorized Officer.
- C. The production (emergency) pit will be fenced with woven wire mesh topped with one (1) strand of barbed wire held in place with metal side posts and wooden corner "H" braces in order to protect livestock and wildlife. Please refer to Item #9E (page #'s 8 & 9) for additional information on the fencing specifications.
- D. During drilling and subsequent operations, all equipment and vehicles will be confined to the access road right-of-way and any additional areas as specified in the approved Application for Permit to Drill.
- E. Reclamation of disturbed areas no longer needed for operations will be accomplished by grading, leveling and seeding as recommended by the Authorized Officer, Bureau of Land Management.

5. Location and Type of Water Supply:

- A. Fresh water for drilling will be obtained from an existing water well and reservoir: Uintah #1, owned by Target Trucking, Inc. and located in the SE $\frac{1}{4}$ SE $\frac{1}{4}$ NE $\frac{1}{4}$  of Section 16, Township 10 South, Range 21 East, Uintah County, Utah; permit #49-991 (A57530).
- B. Water will be transported over existing roads via tank truck from the point of diversion to the proposed CIGE #150-9-10-21 well location. No new construction will be required on/along the proposed water haul route. No off-lease/unit Federal lands will be crossed on/along the proposed water haul route.
- C. No water well will be drilled on this location.

6. Source of Construction Materials:

- A. Construction materials needed for surfacing of the well pad will be obtained from a local contractor having a permitted (private) source of materials in the area. Refer to Item #2G (page #2) regarding any construction materials which may be required on the access road.
- B. No construction materials will be taken from Federal and/or Indian lands without prior approval from the appropriate Surface Management Agency.
- C. If production is established, any additional construction materials needed for surfacing the access road and installation of production facilities will be purchased from a local supplier having a permitted (private) source of materials in the area.
- D. No new access roads for construction materials will be required.

7. Methods of Handling Waste Materials:

- A. Cuttings - the cuttings will be deposited in the reserve/blooiie pit.
- B. Drilling fluids - including salts and chemicals will be contained in the reserve/blooiie pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within ninety (90) days after termination of drilling and completion activities. In the event adverse weather conditions prevent removal of the fluids from the reserve pit within this time period, an extension may be granted by the Authorized Officer upon receipt of a written request from Coastal Oil & Gas Corporation.

7. Methods of Handling Waste Materials: Continued

- B. Drilling fluids - the reserve pit will be constructed so as not to leak, break, or allow discharge.
- C. Produced fluids - liquid hydrocarbons produced during completion operations will be placed in test tanks on the location. Produced waste water will be confined to a lined pit (reserve pit) or storage tank for a period not to exceed ninety (90) days after initial production.

During the ninety (90) day period, in accordance with NTL-2B, an application for approval of a permanent disposal method and location, along with the required water analysis, shall be submitted for the Authorized Officer's approval. Failure to file an application within the time frame allowed will be considered an incidence of noncompliance.

Any spills of oil, gas, salt water or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

- D. Sewage - self-contained, chemical toilets will be provided by Rocket Sanitation for human waste disposal. Upon completion of operations, or as needed, the toilet holding tanks will be pumped and the contents thereof disposed of in the nearest, approved, sewage disposal facility.
- E. Garbage and other waste material - garbage, trash and other waste materials will be collected in a portable, self-contained and fully-enclosed trash cage during drilling and completion operations. Upon completion of operations (or as needed) the accumulated trash will be disposed of at an authorized sanitary landfill. No trash will be burned on location or placed in the reserve pit.
- F. Immediately after removal of the drilling rig, all debris and other waste materials not contained in the trash cage will be cleaned up and removed from the well location. No adverse materials will be left on the location upon the termination of drilling and completion operations. Any open pits will be fenced during the drilling operation and the fencing will be maintained until such time as the pits are backfilled.

8. Ancillary Facilities:

None anticipated.

9. Wellsite Layout:

- A. Figure #1 shows the drill site layout as staked. Cross sections have been drafted to visualize the planned cuts and fills across the location. A minimum of six (6) inches of topsoil will be stripped from the location (including areas of cut, fill, and/or subsoil storage) and stockpiled for future reclamation of the well site. Refer to Figure #1 for the location of the topsoil and subsoil stockpiles.
- B. Figure #1 is a diagram showing the rig layout. No permanent living facilities are planned. There will be one (1) trailer on location during drilling operations for the toolpusher.
- C. A diagram showing the proposed production facility layout will be submitted to the Authorized Officer via Sundry Notice (Form 3160-5) for approval of subsequent operations. Please refer to Item #4B2 (page #4) for additional information in this regard).
- D. If porous subsoil materials (gravel, scoria, sand, faulted rock structures, etc.) are encountered during reserve pit construction, an impervious liner will be installed in order to prevent drilling water loss through seepage. We do not anticipate the need for a pit liner at this time.
- E. Prior to the commencement of drilling operations, the reserve pit will be fenced "sheep tight" on three (3) sides according to the following minimum standards:
  1. 39-inch net wire shall be used with at least one (1) strand of barbed wire on top of the net wire (barbed wire is not necessary IF pipe or some type of reinforcement rod is attached to the top of the entire fence).
  2. The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least 42 inches.
  3. Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.
  4. Standard steel, wood, or pipe posts shall be used between the corner braces. maximum distance between any two (2) posts shall be no greater than sixteen (16) feet.

9. Wellsite Layout: Continued

E. Prior to the commencement of drilling operations, the reserve pit will be fenced "sheep tight" on three (3) sides according to the following minimum standards:

5. All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The fourth side of the reserve pit will be fenced immediately upon removal of the drilling rig and the fencing will be maintained until the pit is backfilled.

F. Any hydrocarbons on the pit will be removed from the pit as soon as possible after drilling operations are completed.

10. Plans for Reclamation of the Surface:

A. Production

1. Immediately upon well completion, the well location and surrounding area(s) will be cleared of all debris, materials, trash and junk not required for production.
2. Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with 43 CFR 3162.7-1.
3. If a plastic or nylon reinforced pit liner is used, it shall be torn and perforated before backfilling of the reserve pit.
4. Before any dirt work to restore the location takes place, the reserve pit will be completely dry and all cans, barrels, pipe, etc. will be removed. Other waste and spoil materials will be disposed of immediately upon completion of drilling and workover activities.
5. The reserve pit and that portion of the location and access road not needed for production facilities and/or producing operations will be reclaimed within ninety (90) days from the date of well completion, weather permitting.

10. Plans for Reclamation of the Surface:

A. Production - Continued

6. For production, the fill slopes will be reduced from a 1.5:1 slope to a 4:1 slope and the cut slopes will be reduced from a 1.5:1 slope to a 4:1 slope by pushing the fill material back up into the cut.
7. Upon completion of backfilling, leveling and re-contouring, the stockpiled topsoil will be evenly spread over the reclaimed area(s). Prior to reseeding, all disturbed surfaces (including the access road and location) will be scarified and left with a rough surface. No depressions will be left that would trap water and form ponds. All disturbed surfaces (including the access road and well pad areas) will be reseeded with a seed mixture to be recommended by the Authorized Officer, Bureau of Land Management.

Seed will be drilled on the contour to an approximate depth of one-half (1/2) inch. All seeding will be conducted after September 15 and prior to ground frost.

B. Dry Hole/Abandoned Location

1. At such time as the well is physically plugged and abandoned, Coastal Oil & Gas Corporation will submit a "Subsequent Report of Abandonment" to the Authorized Officer for approval. At that time, the Bureau of Land Management will formulate the appropriate surface rehabilitation requirements and attach them as the conditions of approval for final abandonment.

11. Surface Ownership:

The well site and proposed access road are situated on surface estate which is owned by the United States of America and administered by:

Area Manager  
Book Cliffs Resource Area Office  
Bureau of Land Management  
170 South 500 East  
Vernal, Utah 84078  
Phone: (801) 789-1362

12. Other Information:

- A. General Description of the Project Area: The proposed drill site is located within the Natural Buttes Unit in an area of northeastern Utah and more specifically in an area of moderately to severely eroded uplands located between the White River to the east (and north), both the Green River and Cottonwood Wash to the west, Bitter Creek to the east, and Willow Creek to the southwest.

This area is classified as a "High Plains Steppe" (cold desert) and is characterized by gently to moderately undulated uplands dissected by numerous dendritically-patterned, ephemeral drainages of both the Green and White Rivers. Generally, local flora consists of native grasses such as salt grass, galleta grass, needle-and thread grass, Indian ricegrass; and woody species such as shadscale, horsebrush, black sagebrush, fringe sagebrush, big sagebrush, rabbitbrush, and greasewood along the dry drainages. Local fauna consists of mule deer, antelope, coyotes, rabbits, raptors, and various smaller vertebrate and invertebrate species.

There are no known threatened or endangered species that will be affected by implementation of operations on the proposed CIGE #150-9-10-21 well location.

- B. Surface Use Activities: The primary surface use is for grazing.
- C. Proximity of Water, Occupied Dwellings, Archaeological, Historical or Cultural Sites:
1. The closest source of permanent water is the White River, located approximately 8.0 miles to the east.
  2. The closest occupied dwellings are located in the community of Ouray, approximately 15.0 miles to the northwest.
  3. Coastal Oil & Gas Corporation will be responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites or for collecting artifacts. If historic or archaeological materials are uncovered, Coastal Oil & Gas Corporation will suspend all operations that might further disturb such materials and immediately contact the Authorized Officer.

12. Other Information:

C. Proximity of Water, Occupied Dwellings, Archaeological, Historical or Cultural Sites: Continued

3. Within five (5) working days the Authorized Officer will inform Coastal Oil & Gas Corporation as to:
  - whether the materials appear eligible for the National Register of Historic Places;
  - the mitigation measures the operator will likely have to undertake before the site can be used (assuming in situ preservation is not necessary); and
  - a time frame for the Authorized Officer to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the Authorized Officer are correct and that mitigation is appropriate.

If Coastal Oil & Gas Corporation wishes, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the Authorized Officer will assume responsibility for whatever recordation and stabilization of the exposed materials may be required. Otherwise, Coastal Oil & Gas Corporation will be responsible for mitigation costs.

The Authorized Officer will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the Authorized Officer that the required mitigation has been completed, Coastal Oil & Gas Corporation will then be allowed to resume construction.

D. Additional Stipulations for Operations on Lands Administered by the Bureau of Land Management:

1. Coastal Oil & Gas Corporation will control noxious weeds along rights-of-way for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds may be obtained from the Bureau of Land Management, or the Uintah County Extension Office.

12. Other Information:

D. Additional Stipulations for Operations on Lands Administered by the Bureau of Land Management:

1. On lands administered by the Bureau of Land Management, it is required that a "Pesticide Use Proposal" shall be submitted, and approval obtained, prior to the application of herbicides or other pesticides or possible hazardous chemicals for the control of noxious weeds.
2. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on federal lands after conclusion of drilling operations or at any other time without the proper authorization from the Bureau of Land Management. However, if BLM authorization is obtained, it is only a temporary measure to allow Coastal Oil & Gas Corporation the time to make arrangements for permanent storage at a commercial facility.
3. Coastal Oil & Gas Corporation shall contact the Bureau of Land Management between 24 and 48 hours prior to commencement of construction activities on the access road and/or well location: (801) 789-1362.
4. No construction or drilling activities shall be conducted between May 15 and June 20 in order to protect crucial Antelope kidding areas.
5. The Bureau of Land Management shall be notified upon site completion and prior to moving drilling tools onto the location.

13. Lessee's or Operator's Representative and Certification:

Representative

Coastal Oil & Gas Corporation  
Randy L. Bartley, Operations Manager  
P.O. Box 749  
Denver, Colorado 80201-0749  
Phone: (303) 572-1121

13. Lessee's or Operator's Representative and Certification:

Representative - Continued

Heitzman Drill-Site Services\*  
Dale Heitzman and/or Robert M. Anderson  
P.O. Drawer 3579  
Casper, Wyoming 82602  
Phone: (307) 266-4840

\* Contact for any additional information which may be required for approval of this Application for Permit to Drill.

Certification:

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil & Gas Orders, the approved plan of operations, and any applicable Notice to Lessees.


Coastal Oil & Gas Corporation will be fully responsible for the actions of their subcontractors. A complete copy of the approved Application for Permit to Drill will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Coastal Oil & Gas Corporation, its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

19 July 1991  
Date

  
Robert M. Anderson/Authorized Agent




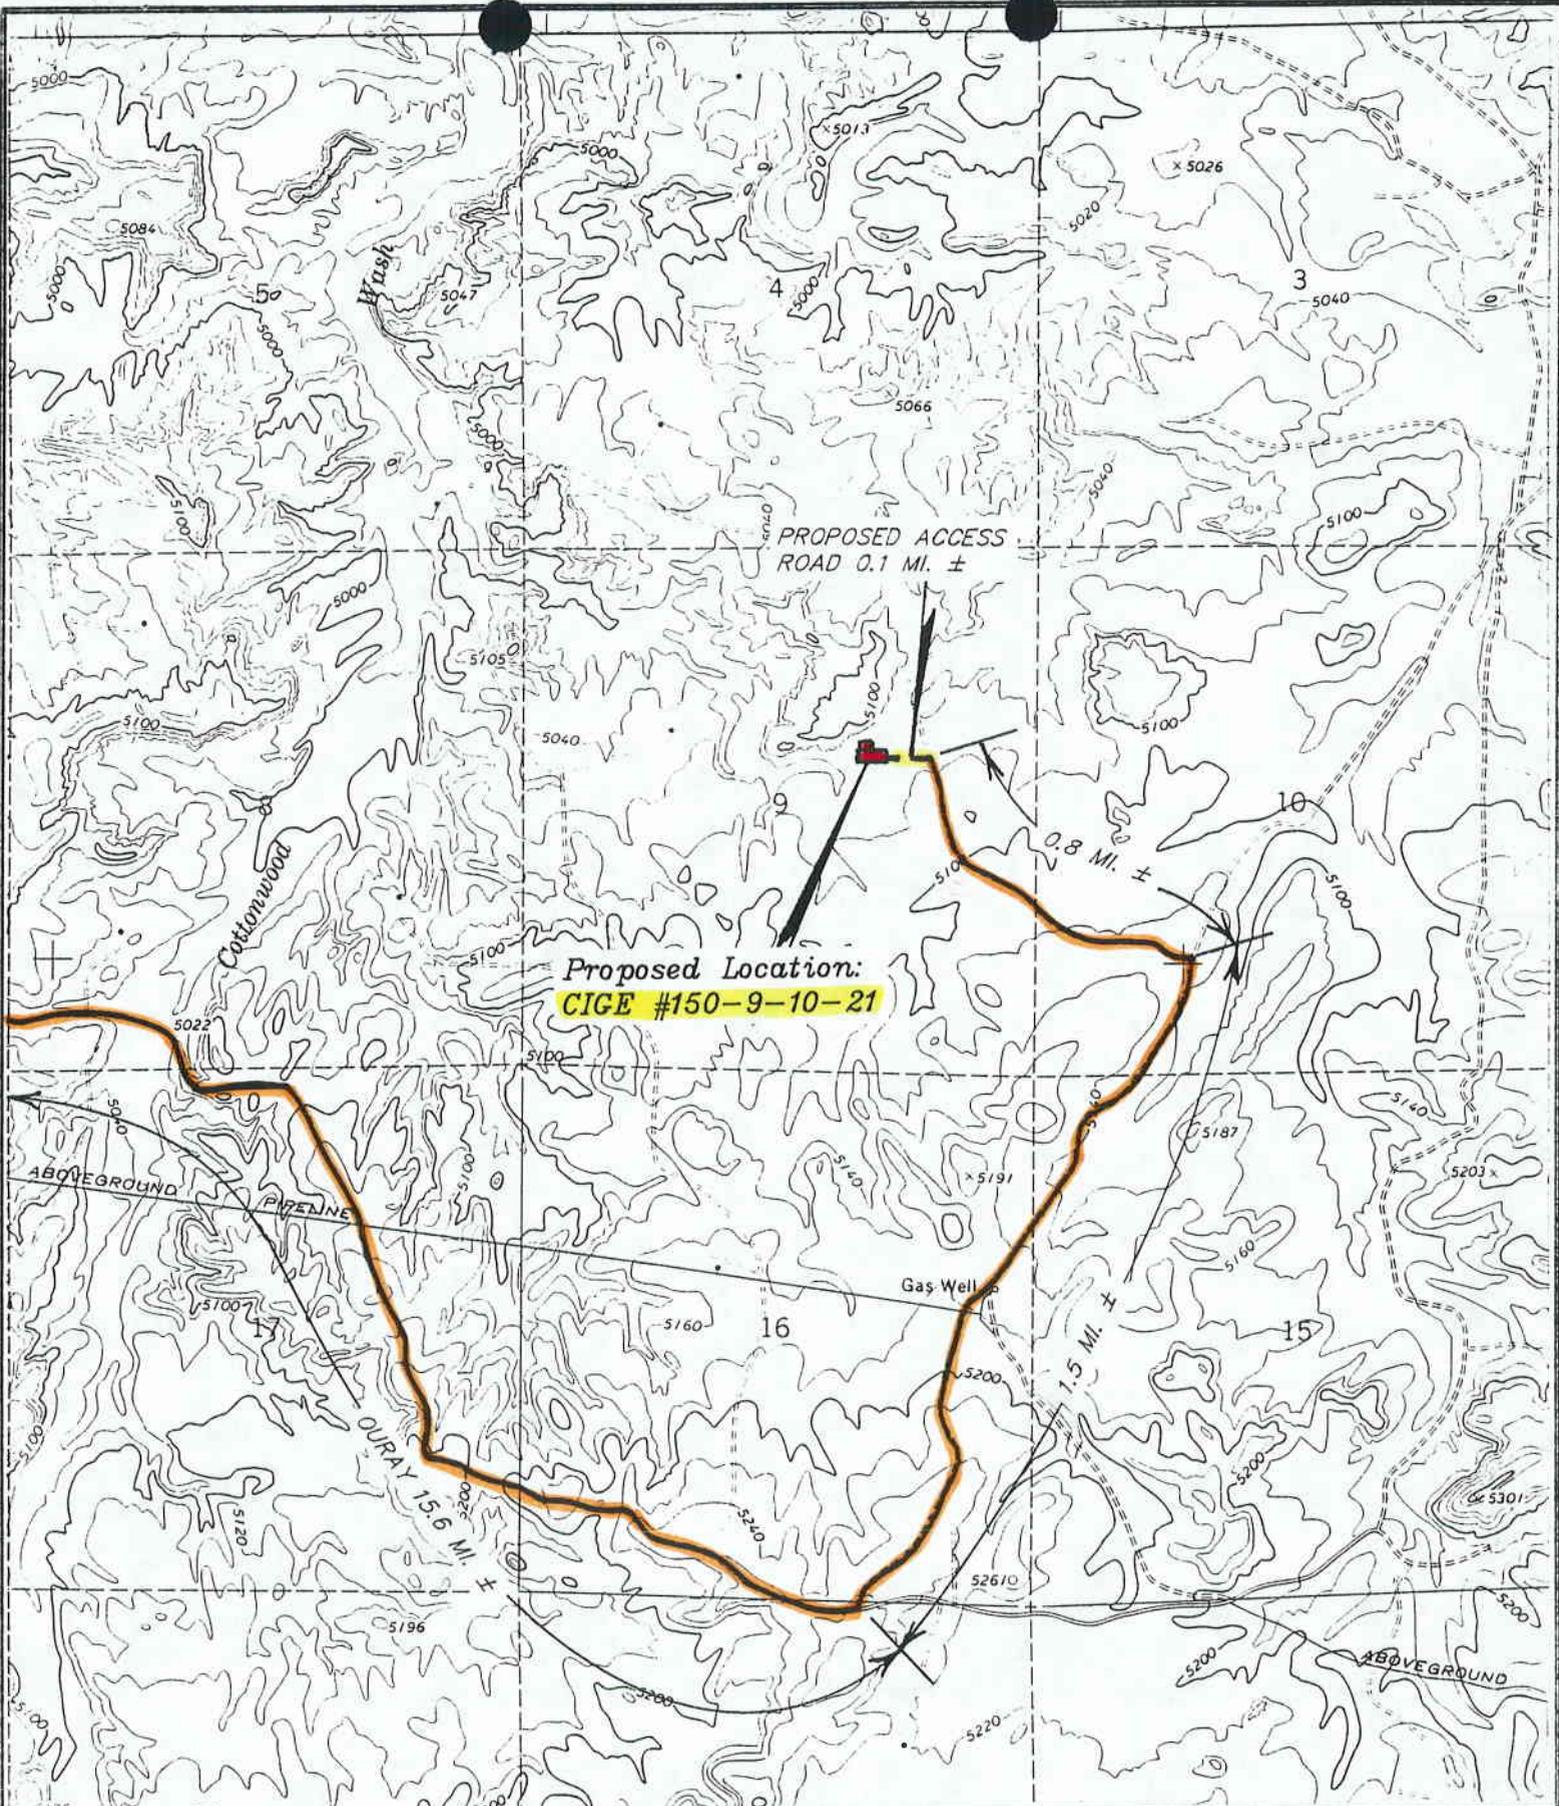

TOPOGRAPHIC  
 MAP "B"  
 SCALE: 1" = 2000'  
 DATE 6-19-91 R.E.H.



**COASTAL OIL & GAS CORP.**  
 CIGE #150-9-10-21  
 SECTION 9, T10S, R21E, S.L.B.&M.

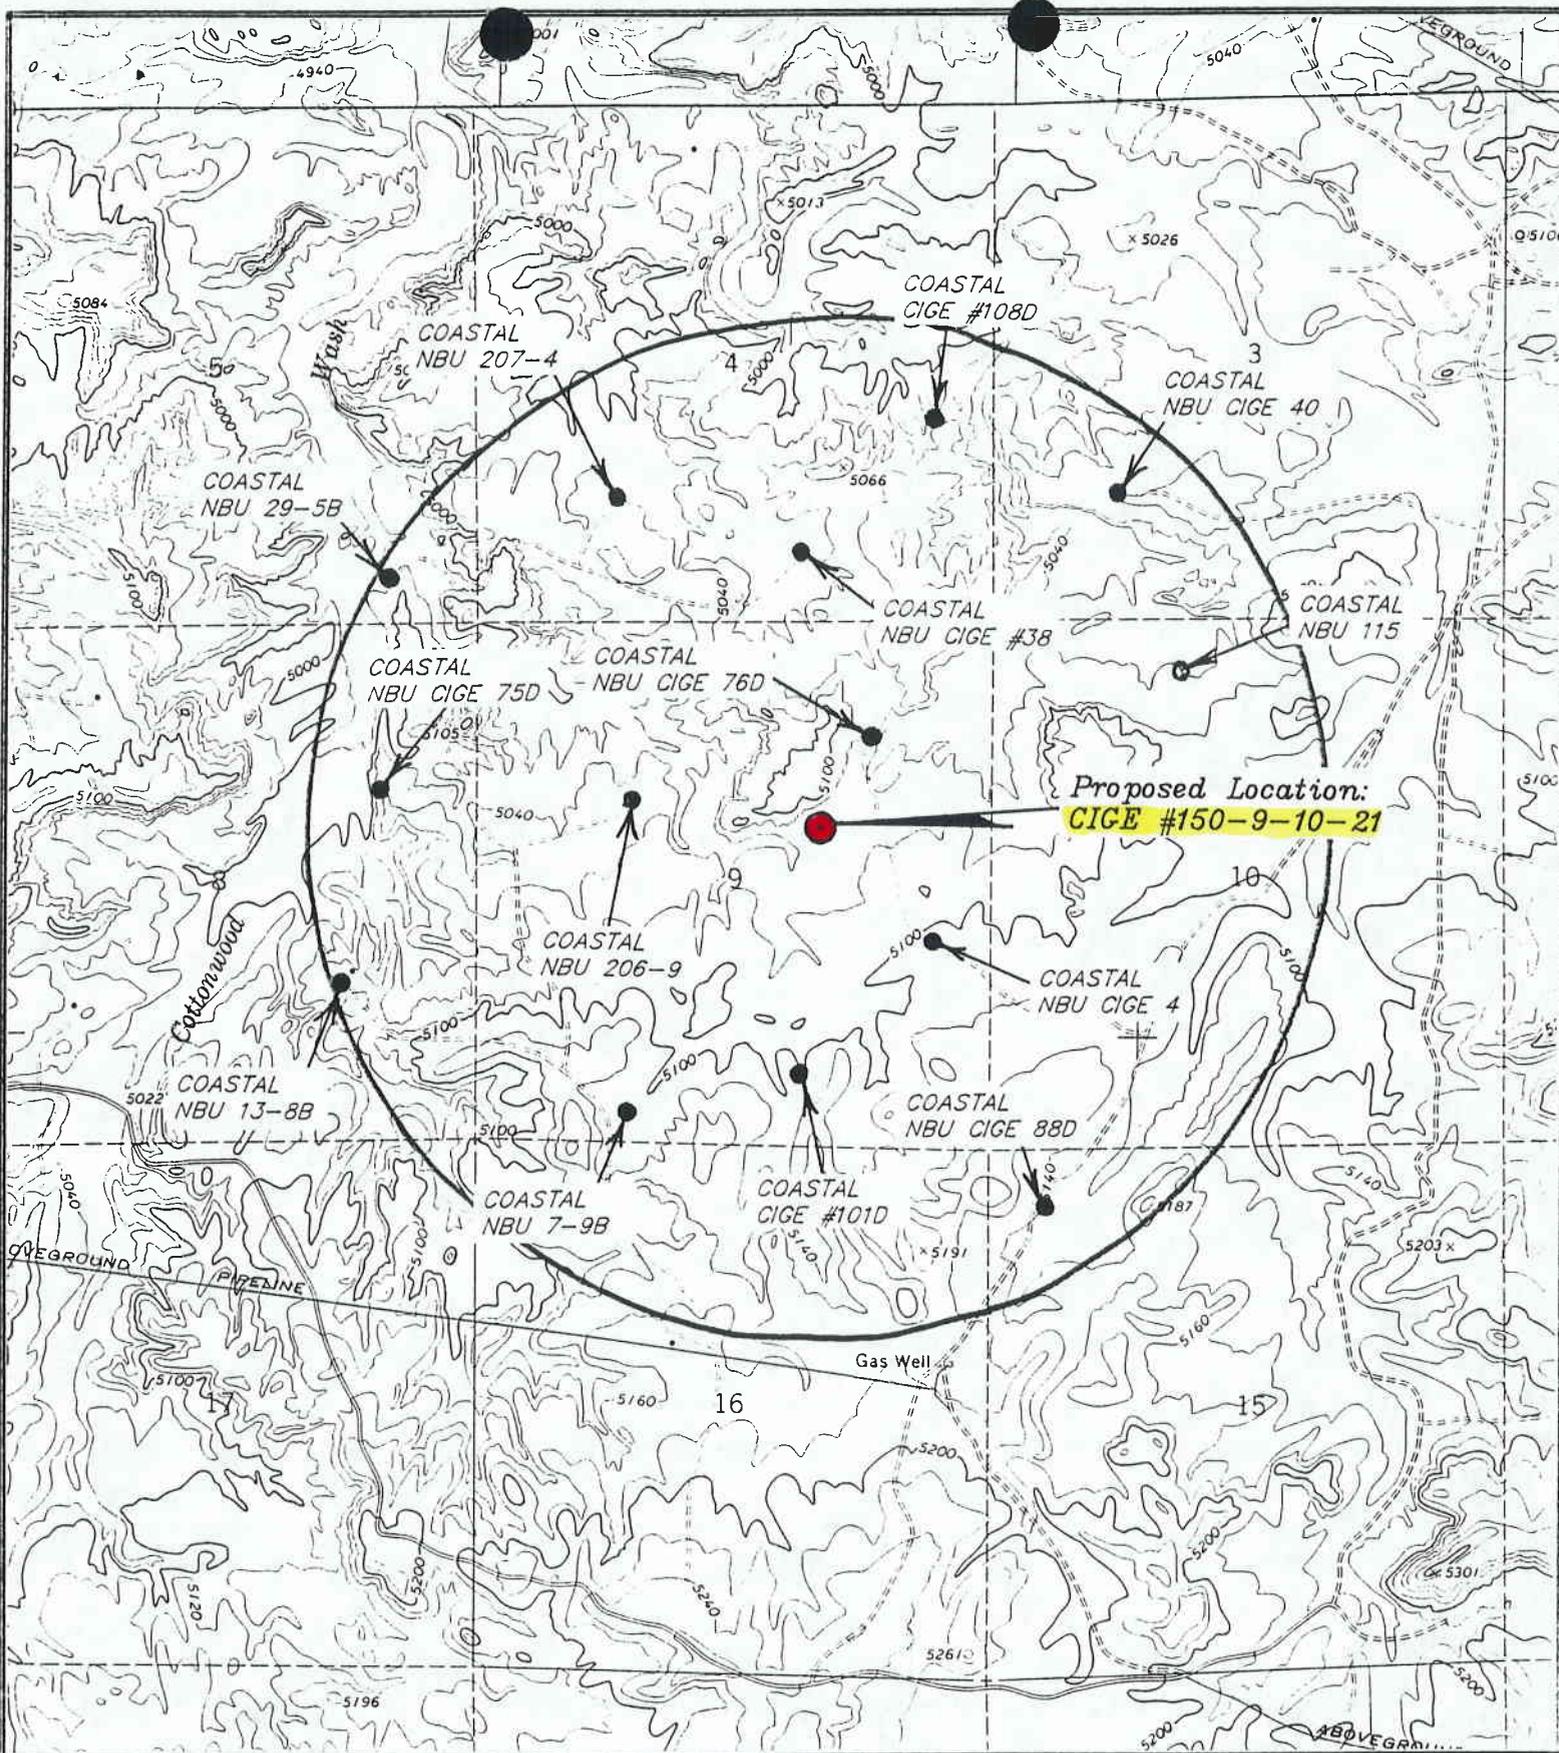

**LEGEND:**

- ⊗ = Water Wells
- ◆ = Abandoned Wells
- = Temporarily Abandoned Wells
- ⊘ = Disposal Wells
- = Drilling Wells
- = Producing Wells
- = Shut-in Wells



**COASTAL OIL & GAS CORP.**

CIGE #150-9-10-21  
 SECTION 9, T10S, R21E, S.L.B.&M.  
 T O P O M A P " C "



DATE: 6-19-91 R.E.H.

COASTAL OIL & GAS CORP.


LOCATION LAYOUT FOR  
CIGE #150-9-10-21  
SECTION 9, T10S, R21E, S.L.B.&M.

NOTE:

Flare Pit is to be located a min. of 100' from the Well Head.

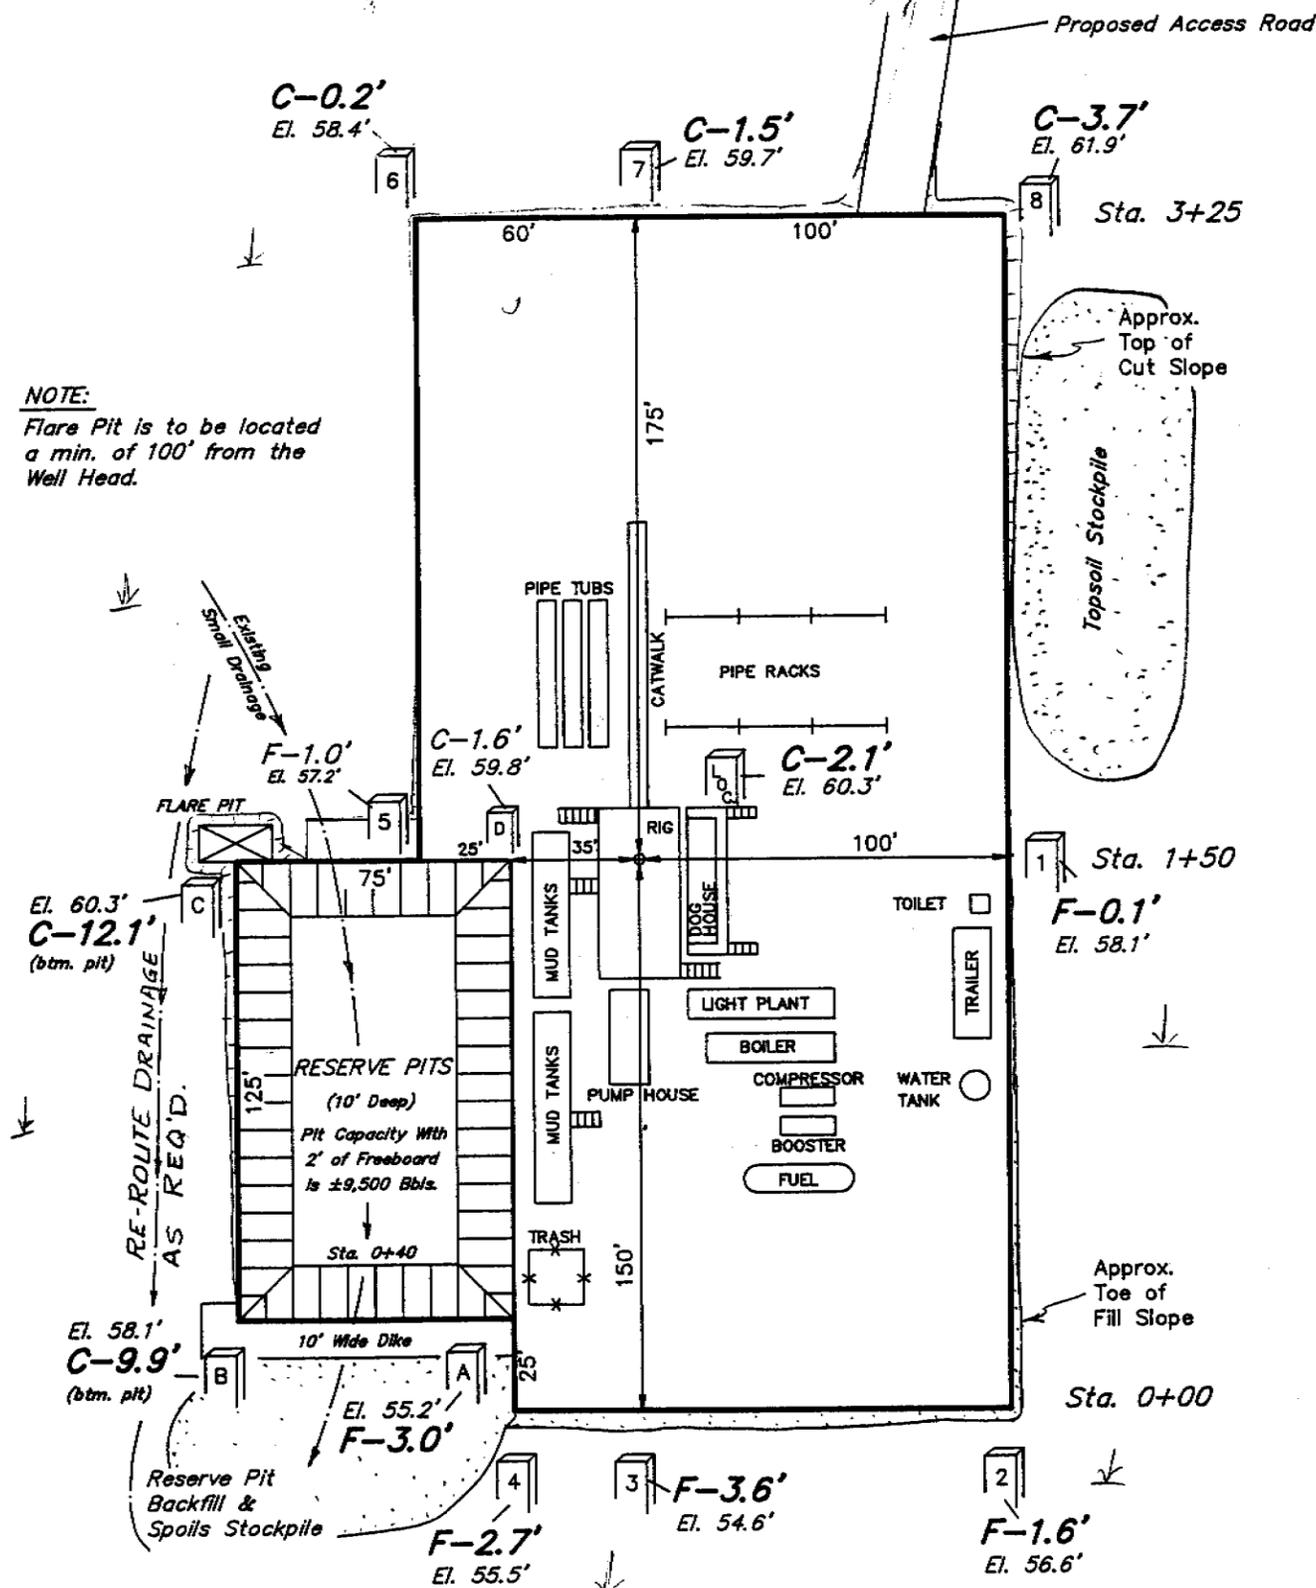


SCALE: 1" = 50'  
DATE: 6-18-91  
Drawn By: J.R.S.  
REVISED 7-11-91 R.E.H




TYP. LOCATION LAYOUT


TYP. CROSS SECTIONS

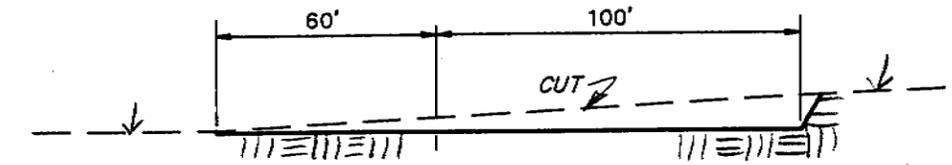


STA. 3+25

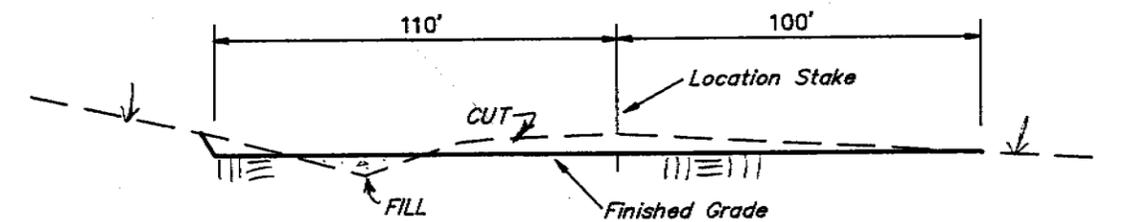

STA. 1+50

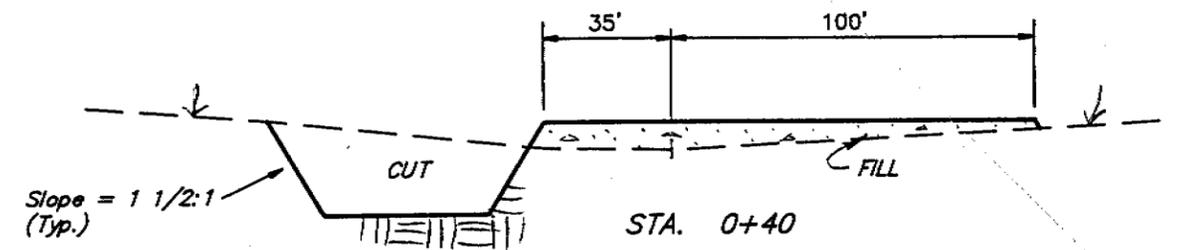

STA. 0+40

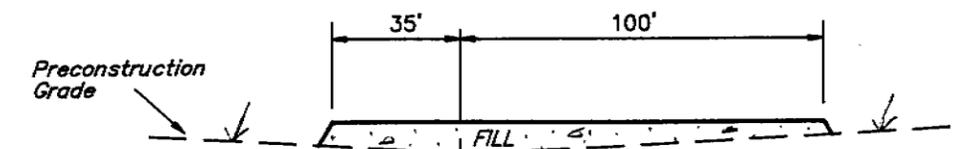

STA. 0+00

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,070 Cu. Yds.
Remaining Location	= 3,150 Cu. Yds.
<b>TOTAL CUT</b>	<b>= 4,220 CU.YDS.</b>
<b>FILL</b>	<b>= 1,830 CU.YDS.</b>

EXCESS MATERIAL AFTER 5% COMPACTION	= 2,290 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 2,290 Cu. Yds.
<b>EXCESS UNBALANCE (After Rehabilitation)</b>	<b>= 0 Cu. Yds.</b>

NOTES:

Elev. Ungraded Ground At Loc. Stake = 5060.3'  
FINISHED GRADE ELEV. AT LOC. STAKE = 5058.2'

FIGURE #1

OPERATOR Coastal Oil Gas Corp N-0230 DATE 8-1-91

WELL NAME CTGE 150-9-10-01

SEC S<sub>W</sub>NE 9 T 10S R 01E COUNTY Mitch

43-047-30058  
API NUMBER

Lease (1)  
TYPE OF LEASE

CHECK OFF:

PLAT.

BOND

NEAREST WELL

LEASE

FIELD

POTASH OR OIL SHALE

PROCESSING COMMENTS:

Approved 91 Supplement P.O.D. approved 7-31-91  
water permit 19-991 (A57530) target ducking  
Oil shale area

APPROVAL LETTER:

SPACING:

R615-2-3

Natural Buttes  
UNIT

R615-3-2

NA  
CAUSE NO. & DATE

R615-3-3

STIPULATIONS:

Oil shale area



State of Utah  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

Norman H. Bangerter  
Governor  
Dee C. Hansen  
Executive Director  
Dianne R. Nielson, Ph.D.  
Division Director

355 West North Temple  
3 Triad Center, Suite 350  
Salt Lake City, Utah 84180-1203  
801-538-5340

August 6, 1991

Coastal Oil & Gas Corporation  
P. O. Box 749  
Denver, Colorado 80201-0749

Gentlemen:

Re: CIGE 150-9-10-21 Well, 2093 feet from the North line, 1724 feet from the East line, SW NE, Section 9, Township 10 South, Range 21 East, Uintah County, Utah

Approval to drill the referenced well is hereby granted in accordance with Utah Code Ann. Section 40-6-18, et seq. (1953, as amended), and Utah Admin. R.615-2-3, subject to the following stipulation:

1. Special attention is directed to compliance with Utah Admin. R.615-3-34, which prescribes drilling procedures for designated oil shale areas.

In addition, the following actions are necessary to fully comply with this approval:

1. Spudding notification within 24 hours after drilling operations commence.
2. Submittal of Entity Action Form 6, within five working days following spudding and whenever a change in operations or interests necessitates an entity status change.
3. Submittal of the Report of Water Encountered During Drilling, Form 7.
4. Prompt notification in the event it is necessary to plug and abandon the well. Notify Frank R. Matthews, Petroleum Engineer, (Office) (801) 538-5340, (Home) (801) 476-8613, or R. J. Firth, Associate Director, (Home) (801) 571-6068.
5. Compliance with the requirements of Utah Admin. R.615-3-20, Gas Flaring or Venting.

Page 2  
Coastal Oil & Gas Corporation  
CIGE 150-9-10-21  
August 6, 1991

6. Prior to commencement of the proposed drilling operations, plans for facilities for disposal of sanitary wastes at the drill site shall be submitted to the local health department. These drilling operations and any subsequent well operations must be conducted in accordance with applicable state and local health department regulations. A list of local health departments and copies of applicable regulations are available from the Department of Environmental Quality, Division of Drinking Water/Sanitation, telephone (801) 538-6159.
7. This approval shall expire one (1) year after date of issuance unless substantial and continuous operation is underway or an application for an extension is made prior to the approval expiration date.

The API number assigned to this well is 43-047-32058.

Sincerely,



R. J. Firth  
Associate Director, Oil & Gas

tas  
Enclosures  
cc: Bureau of Land Management  
J. L. Thompson  
we14/1-6

**UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT**

**APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK**

1a. TYPE OF WORK  
 DRILL       DEEPEN       PLUG BACK

b. TYPE OF WELL  
 OIL WELL       GAS WELL       OTHER       SINGLE ZONE       MULTIPLE ZONE

2. NAME OF OPERATOR  
 Coastal Oil & Gas Corporation

3. ADDRESS OF OPERATOR  
 P. O. Box 749, Denver, Colorado 80201-0749

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)\*  
 At surface  
 2093' FNL, 1724' FEL (SW $\frac{1}{4}$ NE $\frac{1}{4}$ ) Section 9, T10S, R21E  
 At proposed prod. zone  
 Same As Above 43.047-32058

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE\*  
 Approximately Ten (10) Miles Southeast of Ouray, Utah

15. DISTANCE FROM PROPOSED\* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drig. unit line, if any)      1724'

16. NO. OF ACRES IN LEASE      400

17. NO. OF ACRES ASSIGNED TO THIS WELL      80

18. DISTANCE FROM PROPOSED LOCATION\* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT.      1100'±

19. PROPOSED DEPTH      5850'

20. ROTARY OR CABLE TOOLS      Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)  
 5060' GR

22. APPROX. DATE WORK WILL START\*  
 September 10, 1991

5. LEASE DESIGNATION AND SERIAL NO.  
 UTU-01416

6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
 Not Applicable

7. UNIT AGREEMENT NAME  
 Natural Buttes

8. FARM OR LEASE NAME  
 CIGE

9. WELL NO.  
 150-9-10-21

10. FIELD AND POOL, OR WILDCAT  
 Natural Buttes

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
 Section 9, T10S, R21E

12. COUNTY OR PARISH      13. STATE  
 Uintah      Utah

**RECEIVED**  
 AUG 14 1991  
 DIVISION OF  
 OIL GAS & MINING


23. (ALL NEW) PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12-1/4"	8-5/8" K-55	24.0#	0- 250'	180 sx Circ. to Surface *
7-7/8"	5-1/2" K-55	17.0#	0-5850'	545 sx Circ. to Surface *

\* Cement volumes may change due to hole size.  
 Calculate from Caliper log.

EIGHT-POINT RESOURCE PROTECTION PLAN ATTACHED.

I hereby certify that Coastal Oil & Gas Corporation is authorized by the proper Lease Interest Owners to conduct lease operations associated with this Application for Permit to Drill the CIGE #150-9-10-21, Federal Lease # UTU-01416. Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by Coastal Oil & Gas Corporation, Nationwide Bond # CO-0018, who will be responsible for compliance with all the terms and conditions of that portion of the lease associated with this Application.



IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED Charles E. Mowry TITLE District Drilling Manager DATE July 16, 1991  
 (This space for Federal or State office use)

PERMIT NO. \_\_\_\_\_ APPROVAL DATE \_\_\_\_\_  
 APPROVED BY [Signature] TITLE ASSISTANT DISTRICT MANAGER MINERALS DATE AUG 13 1991  
 CONDITIONS OF APPROVAL, IF ANY: \_\_\_\_\_

**NOTICE OF APPROVAL**      **CONDITIONS OF APPROVAL ATTACHED TO OPERATOR'S COPY**  
 \*See Instructions On Reverse Side

UT-080-1m-162

CONDITIONS OF APPROVAL  
FOR APPLICATION FOR PERMIT TO DRILL

Company/Operator: COASTAL OIL & GAS CORPORATION  
Well Name & Number: CIGE 150  
Lease Number: U-01416  
Location: SWNE      Sec. 9      T. 10S      R. 21E  
Surface Ownership: BLM

NOTIFICATION REQUIREMENTS

- Location Construction - at least forty-eight (48) hours prior to construction of location and access roads.
- Location Completion - prior to moving on the drilling rig.
- Spud Notice - at least twenty-four (24) hours prior to spudding the well
- Casing String and Cementing - at least twenty-four (24) hours prior to running casing and cementing all casing strings.
- BOP and Related Equipment Tests - at least twenty-four (24) hours prior to initiating pressure tests.
- First Production Notice - within five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill.

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to Tim Ingwell of this office. Copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

2. Pressure Control Equipment

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint.

As a minimum, the usable water and oil shale resources shall be isolated and/or protected by having a cement top for the production casing at least 200 ft. above the top of the Mahogany oil shale, identified at + 1970 ft.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the Authorized Officer. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vaporproof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the Authorized Officer (AO).

A cement bond log (CBL) shall be utilized to determine the top of cement (TOC) and bond quality for the production casing.

6. Notifications of Operations

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells, as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated, or the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of thirty (30) days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the AO. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

All site security regulations, as specified in Onshore Oil and Gas Order No. 3, shall be adhered to.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling onlease or off-lease will have prior written approval from the AO.

Gas meter runs for each well will be located within 500 feet of the wellhead. The gas flowline will be buried or anchored down from the wellhead to the meter and 500 feet downstream of the meter run or any production facilities. Meter runs will be housed and/or fenced.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries. Tests for meter accuracy will be conducted monthly for the first three months on new meter installations and at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, please contact one of the following individuals:

Gerald E. Kenczka (801) 781-1190  
Petroleum Engineer

Ed Forsman (801) 789-7077  
Petroleum Engineer

BLM FAX Machine (801) 789-3634

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous:

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids.

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt wastes.

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation, and miscellaneous solids

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: September 30, 1990

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

**SUBMIT IN TRIPLICATE**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
 Coastal Oil & Gas Corporation

3. Address and Telephone No.  
 P. O. Box 749, Denver, CO 80201-0749 (303) 573-4478

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
 2093' FNL 1724' FEL Sec. 9, T10S R21E

5. Lease Designation and Serial No.  
 UTU-01416

6. If Indian, Allottee or Tribe Name  
 N/A

7. If Unit or CA, Agreement Designation  
 Natural Buttes

8. Well Name and No.  
 CIGE #150-9-10-21

9. API Well No.  
 42-047-22058

10. Field and Pool, or Exploratory Area  
 Natural Buttes

11. County or Parish, State  
 Uintah, Utah

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent <input type="checkbox"/> Subsequent Report <input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Abandonment <input type="checkbox"/> Recompletion <input type="checkbox"/> Plugging Back <input type="checkbox"/> Casing Repair <input type="checkbox"/> Altering Casing <input checked="" type="checkbox"/> Other  <input type="checkbox"/> Change of Plans <input type="checkbox"/> New Construction <input type="checkbox"/> Non-Routine Fracturing <input type="checkbox"/> Water Shut-Off <input type="checkbox"/> Conversion to Injection  <b>Change drilling prognosis</b> (Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Coastal requests a variance to the existing rules and regulations requiring the blooie line to be not less than 100' from the borehole.

This well is being drilled with air mist injecting water at the rate of 15-20 gpm until they reach the lost circulation zone. Then the rig pumps are utilized using aerated water at the rate of 190 gpm to total depth.

**RECEIVED**

OCT 03 1991

**COPY**

DIVISION OF  
OIL GAS & MINING

14. I hereby certify that the foregoing is true and correct

Signed Steve Hutzman Title Authorized Agent Date August 23, 1991

(This space for Federal or State office use)

Approved by Tim Lywell Title acting Date OCT 02 1991

Conditions of approval, if any:

CONDITIONS OF APPROVAL ATTACHED TO OPERATOR'S COPY

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Coastal Oil & Gas Corp.  
Well No. CIGE 150-9-10-21  
Lease U-01416

**CONDITIONS OF APPROVAL**

We have reviewed your proposal for technical adequacy and concur with the request providing the following stipulations are included as a part of the approval.

---

1. Your request is approved to a depth of 1500 ft.
2. Air mist drilling will not be allowed below a depth of 1500 ft. unless the blowie line is extended out at least 100 ft. from the well bore as per the requirements of Onshore Oil and Gas Order No. 2.

**RECEIVED**

OCT 03 1991

DIVISION OF  
OIL GAS & MINING



UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

5. Lease Designation and Serial No.

UTU-01416

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or LA, Agreement Description

Natural Buttes Unit

8. Well Name and No.

CIGE #150-9-10-21

9. API Well No.

43-047-32058

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah County, Utah

**SUBMIT IN TRIPLICATE**

Type of well

Oil Well  Gas Well  Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No.

P. O. Box 749 Denver, CO 80201-0749 (303) 573-4476

4. Location of well (Footage, sec., T., R., M., or Survey Description)

2093' FNL & 1724' FEL  
Section 9, T10S-R21E

**CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION

TYPE OF ACTION

Notice of Intent

Subsurface Report

Final Abandonment Notice

Abandonment

Reconnaissance

Plugging Back

Casing Repair

Alarming Casing

Other Report of Spud

Change of Plans

New Construction

Non-Routine Fracturing

Water Shut-Off

Conversion to Injection

Dispose Water

(Note: Report must be submitted on well Completion or Abandonment Report and Log Form.)

13. Describe proposed or completed operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measure and true vertical depths for all markers and zones pertinent to this work.)

MIRU Leon Ross Drilling. Spud surface hole @ 11:00 a.m., 10/4/91. Drilled 12-1/4" hole to 267'. Ran 6 jts of 8-5/8", 24#, K-55, ST&C and set @ 267' KB. Cemented w/150 sx Type V cmt + add. Cmt in place @ 1:00 p.m., 10/7/91.

**RECEIVED**

OCT 11 1991

DIVISION OF  
OIL GAS & MINING

14. I hereby certify that the foregoing is true and correct

Signed

*Elizabeth Damm*

Title

Regulatory Analyst

Date

10/8/91

(This space for Federal or State office use)

Approved by

Conditions of approval, if any:

Title

Date

ENTITY ACTION FORM - FORM 6

OPERATOR Coastal Oil & Gas Corporation  
ADDRESS P. O. Box 749  
Denver, CO 80201-0749

OPERATOR ACCT. NO. N0230

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
B	2900 →		43-047-32055	NBU #164	NWSE	3	10S	22E	Uintah	10/2/91	10/2/91
WELL 1 COMMENTS: (Entity added 10-21-91) fep											
B	2900 →		43-047-32058	CIGE #150-9-10-21	SWNE	9	10S	21E	Uintah	10/4/91	10/4/91
WELL 2 COMMENTS: For CIG Exploration (Entity added 10-21-91) fep											
WELL 3 COMMENTS:											
WELL 4 COMMENTS:											
WELL 5 COMMENTS:											

ACTION CODES (See instructions on back of form)

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

**RECEIVED**

OCT 11 1991

DIVISION OF  
OIL GAS & MINING

*Eileen Danni Dey*  
Signature Eileen Danni Dey

Regulatory Analyst 10/8/91  
Title Date

Phone No. (303) 573-4476

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

**SUBMIT IN TRIPLICATE**

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other	5. Lease Designation and Serial No. UTU-01416
2. Name of Operator Coastal Oil & Gas Corporation	6. If Indian, Allottee or Tribe Name N/A
3. Address and Telephone No. P. O. Box 749 Denver, CO 80201-0749 (303) 573-4476	7. If Unit or CA, Agreement Designation Natural Buttes Unit
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 2093' FNL & 1724' FEL Section 9, T10S-R21E	8. Well Name and No. CIGE #150-9-10-21
	9. API Well No. 43-047-32058
	10. Field and Pool, or Exploratory Area Natural Buttes
	11. County or Parish, State Uintah County, Utah

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Abandonment
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input checked="" type="checkbox"/> Other <u>Report of Operations</u>
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Please see the attached chronological history for the drilling operations performed on the above referenced well.

RECEIVED

NOV 07 1991

DIVISION OF  
OIL GAS & MINING

14. I hereby certify that the foregoing is true and correct

Signed Aileen Danni Day Title Regulatory Analyst Date 11/5/91

(This space for Federal or State office use)

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_

Conditions of approval, if any: \_\_\_\_\_

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

COASTAL OIL & GAS CORPORATION  
CHRONOLOGICAL HISTORY

CIGE #150

NATURAL BUTTES UNIT

UINTAH COUNTY, UTAH

WI: 100% CIG AFE: 18162

ATD: 5850' (WASATCH) SD: 10/26/91

CSG: 8-5/8" @ 267'

DHC(M\$): 158.9

- 10/8/91 267' KB WORT. Spud w/L. Ross Drlg 11:00 a.m., 10/4/91. Drill 12-1/4" hole to 260' GL. Ran 6 jts (256.48') 8-5/8" 24# K-55 ST&C. Set @ 255' GL. Cmt w/Howco: 150 sx Type V, 2% CaCl<sub>2</sub>, 1/4#/sk Flocele; 15 bbl wtr displacement, 8 bbl cmt. Cmt in place @ 1:00 p.m., 10/7/91. CC: \$18,512.
- 10/16/91 267' Shut down 8 days for hunting season. RURT & NU BOP. Test BOP to 2000 psi, hydril & csg to 1500 psi. BLM notified, no witness. Shut down for hunting season @ 11:30 p.m., 10/15/91. CC: \$40,387.
- 10/26/91 550' Drlg 283'/5.5 hrs. SD. RR, RURT. Drlg cmt & shoe. Work on air compressor. Drlg w/air mist. CC: \$52,999.
- 10/27/91 2200' Drlg 1650'/22.5 hrs. Drlg, svys: 1-1/4 deg @ 762'; 1-3/4 deg @ 1264'; 1-3/4 deg @ 1800'. Hit wtr @ 1480'. Drlg w/aerated wtr. pH 10.5, 700 CFM. CC: \$59,068.
- 10/28/91 3240' Drlg 1040'/22.5 hrs. Drlg, svys: 1-3/4 deg @ 2304'; 2 deg @ 3127'. RS, work BOP. Drlg w/aerated wtr. pH 10.5, 500 SCFM. CC: \$67,911.
- 10/29/91 4280' Drlg 1040'/23 hrs. Drlg, RS, work BOP. Svy: 1-3/4 deg @ 3787'. Drlg w/aerated wtr. pH 10.5, 500 SCFM. CC: \$75,137.
- 10/30/91 5070' Drlg 790'/23 hrs. Drlg, RS, work BOP. Svy: 2 deg @ 4636'. Drlg w/aerated wtr. pH 10.5, 500 SCFM. CC: \$85,571.
- 10/31/91 5660' Drlg 590'/23 hrs. Drlg, RS, check BOP. Svy: 1-1/2 deg @ 5271'. Drlg breaks from 5156-5164', 5202-5207', 5495-5503'. Drlg w/aerated wtr, pH 10.5, 400 CFM. CC: \$91,949.
- 11/1/91 5850' LD DP. 190'/6.5 hrs. Drlg, RS & work BOP. Drlg, circ, 15 stds short trip, no fill. Displ hole w/10# brine. POH w/SLM, no corr. RU Atlas. Log well from 5845-267' w/CNL/Density/DLL/GR/Cal. RD Atlas. TIH. RU LD equipment & LD DP. Drlg w/A/W, 400 CFM. CC: \$111,810.
- 11/2/91 5850' RDRT's. Cont LD DP & DC's. RU & run 142 jts 5-1/2" 17# J-55 LT&C csg (5858.54'). Shoe @ 5845'. FC @ 5806'. Circ & wash 10' to btm. RU Howco. Pump 20 bbls FW, 340 sx Hi-Fill w/1#/sk Capseal + 3% HR-7, tail w/440 sx 50-50 Poz + 2% gel + 10% salt + .6% Hal 24 + .3% CFR-3 + 1/4#/sk Floseal + 1#/sk Capseal. Displace w/134 bbls FW. Bump plug w/2000#, 700# over displ. Floats held. RD Halliburton. Set slips w/100,000#. ND BOP, cut csg. Clean pits. Release rig @ 8:00 p.m., 11/1/91. CC: \$172,555. FINAL DRILLING REPORT.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

**SUBMIT IN TRIPLICATE**

1. Type of Well

Oil Well  Gas Well  Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No.

P. O. Box 749 Denver, CO 80201-0749 (303) 573-4476

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

2093' FNL & 1724' FEL  
Section 9, T10S-R21E

5. Lease Designation and Serial No.

UTU-01416

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA, Agreement Designation

Natural Buttes Unit

8. Well Name and No.

CIGE #150-9-10-21

9. API Well No.

43-047-32058

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah County, Utah

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

Notice of Intent  
 Subsequent Report  
 Final Abandonment Notice

TYPE OF ACTION

Abandonment  
 Recompletion  
 Plugging Back  
 Casing Repair  
 Altering Casing  
 Other Pipeline Right-of-Way  
 Change of Plans  
 New Construction  
 Non-Routine Fracturing  
 Water Shut-Off  
 Conversion to Injection  
 Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Coastal Oil & Gas Corporation requests a right-of-way to install a 4" gas pipeline from the CIGE #150-9-10-21 gas well and tie into the existing gas pipeline. This right-of-way will be located in Section 9, T10S-R21E within lease UTU-01416 and within the Natural Buttes Unit boundaries. Coastal requests a 30' width easement with a total slope distance of ±837'. There will be minimum surface disturbance as the pipeline will be laid on the surface. Please see the attached topographic map which illustrates this proposed right-of-way.

**RECEIVED**

DEC 16 1991

DIVISION OF  
OIL GAS & MINING

3-9-92  
*JAN Matthews*

14. I hereby certify that the foregoing is true and correct.

Signed

*Eileen Dana Day*

Title Regulatory Analyst

Date 12/12/91

(This space for Federal or State office use)

Approved by \_\_\_\_\_

Title \_\_\_\_\_

Date \_\_\_\_\_

Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*See instruction on Reverse Side

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUBMIT IN DUPLICATE\*

(See other instructions on reverse side)

Form approved.  
Budget Bureau No. 1004-0137  
Expires August 31, 1985

WELL COMPLETION OR RECOMPLETION REPORT AND LOG \*

1a. TYPE OF WELL: OIL WELL  GAS WELL  DRY  Other \_\_\_\_\_

b. TYPE OF COMPLETION: NEW WELL  WORK OVER  DEEPEN  PLUG BACK  DIFF. REVR.  Other \_\_\_\_\_

2. NAME OF OPERATOR  
Coastal Oil & Gas Corporation

3. ADDRESS OF OPERATOR  
P. O. Box 749 Denver, CO 80201-0749 (303) 573-4476

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)\*  
At surface 2093' FNL & 1724' FEL  
At top prod. interval reported below Same as above.  
At total depth Same as above.

5. LEASE DESIGNATION AND SERIAL NO.  
UTU-01416

6. IF INDIAN ALLOTTEE OR TRIBE NAME  
N/A

7. UNIT AGREEMENT NAME  
Natural Buttes Unit

8. FARM OR LEASE NAME  
CIGE

9. WELL NO.  
150-9-10-21

10. FIELD AND POOL, OR WILDCAT  
Natural Buttes

11. SEC. T. R. M., OR BLOCK AND SURVEY OR AREA  
Section 9, T10S-R21E

14. PERMIT NO. 43-047-32058 DATE ISSUED 8/6/91

12. COUNTY OR PARISH Uintah 13. STATE Utah

15. DATE SPUDDED 10/4/91 16. DATE T.D. REACHED 10/31/91 17. DATE COMPL. (Ready to prod.) 11/9/91 18. ELEVATIONS (DP, RKB, RT, GR, ETC.)\* 5060' GR, 5072' KB 19. ELEV. CASINGHEAD

20. TOTAL DEPTH, MD & TVD 5850' 21. PLUG, BACK T.D., MD & TVD 5788' 22. IF MULTIPLE COMPL. HOW MANY\* 23. INTERVALS DRILLED BY SFC-TD ROTARY TOOLS CABLE TOOLS

24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)\* 4993' - 5493' (Wasatch) 25. WAS DIRECTIONAL SURVEY MADE No

26. TYPE ELECTRIC AND OTHER LOGS RUN FDC-CNL, DLL-GR, CBL-CCL-GR 11-18-91 27. WAS WELL CORRED No

28. CASING RECORD (Report all strings set in well)

CASING SIZE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
8-5/8"	24#	267' KB	12-1/4"	150 sx Type V + Additives	None
5-1/2"	17#	5845'	7-7/8"	780 sx Hi-Fill & 50/50 Poz	None

29. LINER RECORD 30. TUBING RECORD

SIZE	TOP (MD)	BOTTOM (MD)	BACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
					2-3/8"	4937'	

31. PERFORATION RECORD (Interval, size and number) Perf'd w/4" csg gun, 1 JSPF @ following depths

4993'	5019'	5200'
5002'	5025'	5493'
5005'	5154'	
5010'	5158'	

32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
4993'-5493'	4000 gals 3% KCl wtr + 20 BS's

33. PRODUCTION

DATE FIRST PRODUCTION	PRODUCTION METHOD (Flowing, gas lift, pumping—size and type of pump)	WELL STATUS (Producing or shut-in)					
11/8/91	Flowing	SI					
DATE OF TEST	HOURS TESTED	CHOKE SIZE	PROD'N. FOR TEST PERIOD	OIL—BBL.	GAS—MCF.	WATER—BBL.	GAS-OIL RATIO
11/9/91	24	20/64"		0	1200	0	N/A
FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE	OIL—BBL.	GAS—MCF.	WATER—BBL.	OIL GRAVITY-API (CORR.)	
500	600		0	1200	0	N/A	

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.) SI, WOPLC TEST WITNESSED BY H. Ivie

35. LIST OF ATTACHMENTS Chronological history.

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED Eileen Danni Dey TITLE Regulatory Analyst DATE 12/31/91

\*(See Instructions and Spaces for Additional Data on Reverse Side)

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals; and all drill-stem, tests, including depth interval tested, cushion used, flowing and shut-in pressures, and recoveries):

38. GEOLOGIC MARKERS

FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	NAME	MEAS. DEPTH	TOP TRUE VERT. DEPTH
				Wasatch	4549'	4549'

COASTAL OIL & GAS CORPORATION  
CHRONOLOGICAL HISTORY

CIGE #150  
NATURAL BUTTES UNIT  
UINTAH COUNTY, UTAH  
WI: 100% CIG AFE: 18162  
ATD: 5850' (WASATCH) SD: 10/26/91  
CSG: 8-5/8" @ 267'  
DHC(M\$): 158.9

- 10/8/91 267' KB WORT. Spud w/L. Ross Drlg 11:00 a.m., 10/4/91. Drill 12-1/4" hole to 260' GL. Ran 6 jts (256.48') 8-5/8" 24# K-55 ST&C. Set @ 255' GL. Cmt w/Howco: 150 sx Type V, 2% CaCl<sub>2</sub>, 1/4#/sk Flocele; 15 bbl wtr displacement, 8 bbl cmt. Cmt in place @ 1:00 p.m., 10/7/91. CC: \$18,512.
- 10/16/91 267' Shut down 8 days for hunting season. RURT & NU BOP. Test BOP to 2000 psi, hydril & csg to 1500 psi. BLM notified, no witness. Shut down for hunting season @ 11:30 p.m., 10/15/91. CC: \$40,387.
- 10/26/91 550' Drlg 283'/5.5 hrs. SD. RR, RURT. Drlg cmt & shoe. Work on air compressor. Drlg w/air mist. CC: \$52,999.
- 10/27/91 2200' Drlg 1650'/22.5 hrs. Drlg, svys: 1-1/4 deg @ 762'; 1-3/4 deg @ 1264'; 1-3/4 deg @ 1800'. Hit wtr @ 1480'. Drlg w/aerated wtr. pH 10.5, 700 CFM. CC: \$59,068.
- 10/28/91 3240' Drlg 1040'/22.5 hrs. Drlg, svys: 1-3/4 deg @ 2304'; 2 deg @ 3127'. RS, work BOP. Drlg w/aerated wtr. pH 10.5, 500 SCFM. CC: \$67,911.
- 10/29/91 4280' Drlg 1040'/23 hrs. Drlg, RS, work BOP. Svy: 1-3/4 deg @ 3787'. Drlg w/aerated wtr. pH 10.5, 500 SCFM. CC: \$75,137.
- 10/30/91 5070' Drlg 790'/23 hrs. Drlg, RS, work BOP. Svy: 2 deg @ 4636'. Drlg w/aerated wtr. pH 10.5, 500 SCFM. CC: \$85,571.
- 10/31/91 5660' Drlg 590'/23 hrs. Drlg, RS, check BOP. Svy: 1-1/2 deg @ 5271'. Drlg breaks from 5156-5164', 5202-5207', 5495-5503'. Drlg w/aerated wtr, pH 10.5, 400 CFM. CC: \$91,949.
- 11/1/91 5850' LD DP. 190'/6.5 hrs. Drlg, RS & work BOP. Drlg, circ, 15 stds short trip, no fill. Displ hole w/10# brine. POH w/SLM, no corr. RU Atlas. Log well from 5845-267' w/CNL/Density/DLL/GR/Cal. RD Atlas. TIH. RU LD equipment & LD DP. Drlg w/A/W, 400 CFM. CC: \$111,810.
- 11/2/91 5850' RDRT's. Cont LD DP & DC's. RU & run 142 jts 5-1/2" 17# J-55 LT&C csg (5858.54'). Shoe @ 5845'. FC @ 5806'. Circ & wash 10' to btm. RU Howco. Pump 20 bbls FW, 340 sx Hi-Fill w/1#/sk Capseal + 3% HR-7, tail w/440 sx 50-50 Poz + 2% gel + 10% salt + .6% Hal 24 + .3% CFR-3 + 1/4#/sk Floseal + 1#/sk Capseal. Displace w/134 bbls FW. Bump plug w/2000#, 700# over displ. Floats held. RD Halliburton. Set slips w/100,000#. ND BOP, cut csg. Clean pits. Release rig @ 8:00 p.m., 11/1/91. CC: \$172,555. FINAL DRILLING REPORT.

THE COASTAL CORPORATION  
PRODUCTION REPORT

CHRONOLOGICAL HISTORY

PAGE 2

CIGE #150  
SW/NE SECTION 9-T10S-R21E  
NATURAL BUTTES UNIT  
UINTAH COUNTY, UTAH  
WI: 100% CIGE AFE: 18162  
TD: 5850' SD: 10/26/91  
CSG: 5-1/2" @ 5845'  
PERFS: 4993'-5493'  
CWC(M\$): \$358.8

- 11/6/91 Prep to run CBL. MIRU Welltech #247. NU BOP. PU 4-3/4" mill and 186 jts 2-3/8" tbg. RIH, tag PBD @ 5788'. Circ hole w/130 bbls 3% KCl wtr. POOH w/tbg & mill.  
DC: \$22,130 TC: \$194,685
- 11/7/91 Flow test well. MIRU wireline company. Ran CBL-CCL-GR log from LTD @ 5772' to 1490'. TOC @ 1700'. PT csg to 5000 psi. RIH w/4" csg gun. Perf 10 holes from 4993' to 5493'. RD HLS. RIH w/158 jts 2-3/8" tbg. Land tbg @ 4937' w/notched collar on btm, SN 1-jt above btm, 10' blast joint on top. ND BOP, NU WH, RU Smith Energy. Breakdown perfs w/4000 gals 3% KCl wtr w/additives and 20 ball sealers. AIR 7.7 BPM @ 4200 psi. Balled off perfs. Surged off balls. Finish job. ISIP 990 psi. 15 min 890 psi. Flwd back 2 hrs, well kicked off.  
DC: \$8,662 TC: \$203,347
- 11/8/91 Flwg 1200 MCFD, FTP 500 psi, CP 600 psi, 20/64" chk, 2-3 BWPH.
- 11/9/91 SI, waiting on frac. Flwg 1200 MCFD, FTP 500 psi, CP 600 psi, 20/64" chk. Left tbg in hole. Drop from report until further activity.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

RECEIVED

APR 17 1992

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

DIVISION OF  
OIL GAS & MINING  
SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
Coastal Oil & Gas Corporation

3. Address and Telephone No  
P. O. Box 749 Denver, CO 80201-0749 (303) 573-4476

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
See Attached List

5. Lease Designation and Serial No.  
See Attached List

6. If Indian, Allottee or Tribe Name  
See Attached List

7. If Unit or CA, Agreement Designation  
Natural Buttes Unit

8. Well Name and No.  
See Attached List

9. API Well No.  
See Attached List

10. Field and Pool, or Exploratory Area  
Natural Buttes

11. County or Parsh. State  
Uintah County, Utah

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

- Notice of Intent
- Subsequent Report
- Final Abandonment Notice

- Abandonment
- Recompletion
- Plugging Back
- Casing Repair
- Altering Casing
- Other NTL 2B; IV

- Change of Plans
- New Construction
- Non-Routine Fracturing
- Water Shut-Off
- Conversion to Injection
- Dispose Water

(Note: Report results of multistage completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Coastal Oil & Gas Corporation hereby requests permission to dispose of produced water in unlined pits per NTL-2B, IV, for the subject wells.

- 1) These wells are completed in the Wasatch formation and produce less than 5 barrels of water per day on a monthly basis.
- 2) Two unlined pits per location will be used due to the size and layout of the locations: 40' x 40' x 8' and 6' x 6' x 6' deep with berms surrounding them. Each pit will be fenced and will have cement corner posts per BLM specifications. (See the attached typical facilities diagram.)
- 3) The average evaporation rate for the area compensated for annual rainfall is 70" per year.
- 4) The estimated percolation rate based on the soil characteristics under and adjacent to the pits is 2-6" per hour.
- 5) The depth of usable water aquifers in this area is approximately 1500'.

14. I hereby certify that the foregoing is true and correct.

Signed Eileen Danni Dey  
(This space for Federal or State office use)

Title Regulatory Analyst

Date 4/14/92


Approved by \_\_\_\_\_  
Conditions of approval, if any:

Title \_\_\_\_\_

Accepted by the State  
of Utah Division of  
Oil, Gas and Mining  
Date: 4-29-92

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

COASTAL OIL & GAS CORP.  
NATURAL BUTTES UNIT  
TYPICAL FACILITIES LAYOUT  
NTL-2B; IV

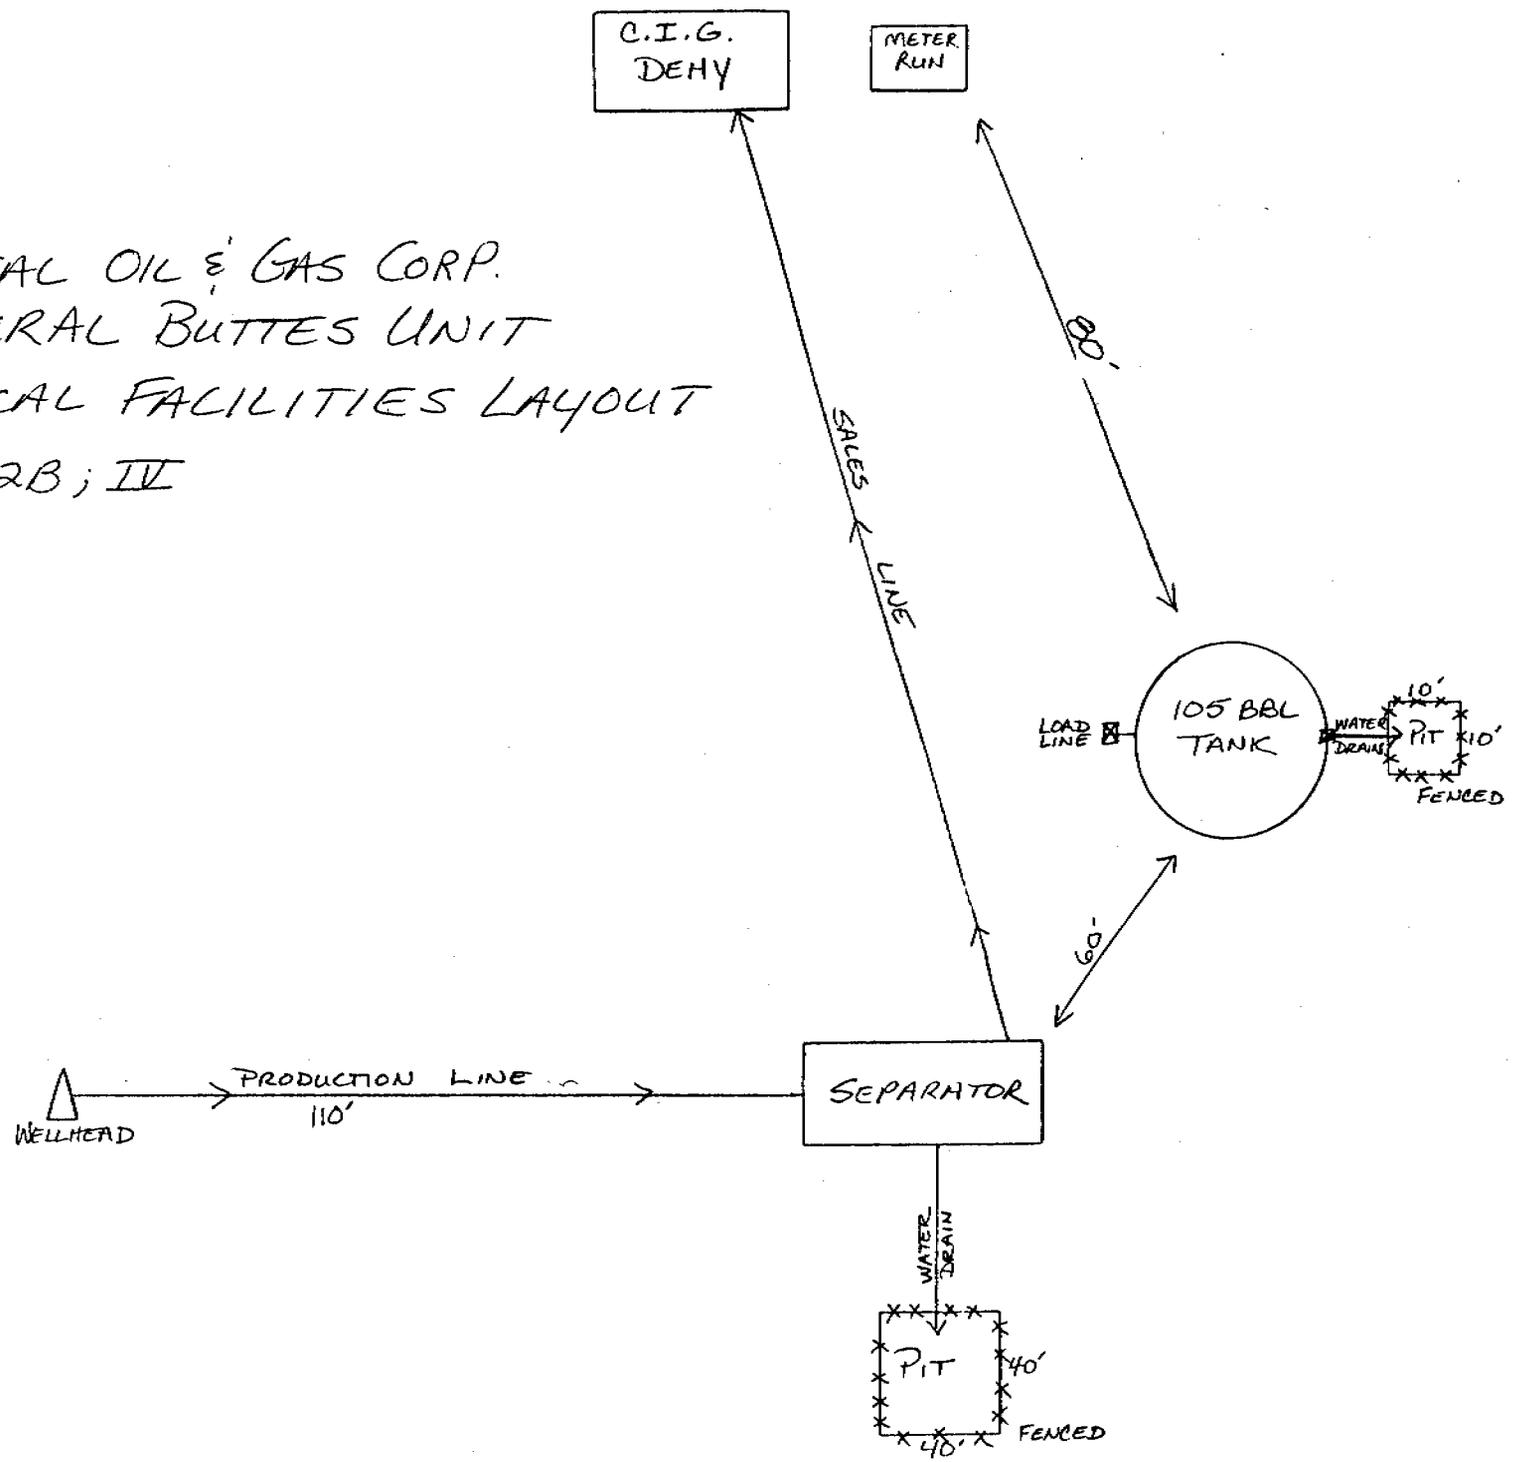

WELL #	LOCATION				STATE OR BLM		API NUMBER
	QUAD	SEC	TWP	RGE	LEASE #	SURFACE	
NBU #103	SENW	10	9	21	U-0141315	UTE	43-047-31956
NBU #104	SENE	16	9	21	ST ML-3282	UTE	43-047-31957
NBU #105	SWSW	17	9	21	U-0575	UTE	43-047-31955
NBU #106	NESW	21	9	21	U-0576	UTE	43-047-31946
NBU #107	SENW	26	9	21	ST ML-01194	STATE	43-047-31916
NBU #108	SESE	19	9	22	U-0284	UTE	43-047-31958
NBU #109	SENE	27	9	21	ST U-01194-A	STATE	43-047-31917
NBU #110	NENE	23	9	21	U-0576	FED.	43-047-31924
NBU #111	SWNW	25	9	21	ST U-01194	STATE	43-047-31920
NBU #112	SESE	33	9	22	U-01191	FED.	43-047-31930
NBU #113	SESE	34	9	22	U-0149077	FED.	43-047-31931
NBU #114	SWSW	5	10	21	U-01393-D	FED.	43-047-31923
NBU #115	NENW	10	10	21	U-0149079	FED.	43-047-31929
NBU #116	NWNW	6	10	22	U-464	FED.	43-047-31925
NBU #117	NENE	10	10	22	ST UT-01197-A	STATE	43-047-31914
NBU #118	SENE	22	9	20	U-0577-B	UTE	43-047-31969
NBU #119	SENW	22	9	20	U-0577-B	UTE	43-047-31973
NBU #120	NWNW	10	9	21	U-0141315	UTE	43-047-31972
NBU #121	NWNE	13	9	21	U-01193	UTE	43-047-
NBU #122	SWSE	13	9	21	U-01193	UTE	43-047-32085
NBU #123	NWNW	15	9	21	U-01188	UTE	43-047-31974
NBU #124	NWNE	16	9	21	ST ML-3282	UTE	43-047-31971
NBU #125	NESE	17	9	21	U-0575	UTE	43-047-32090
NBU #126	NENW	21	9	21	U-0576	UTE	43-047-31962
NBU #127	SWNW	21	9	21	U-0576	UTE	43-047-31963
NBU #128	SWSW	21	9	21	U-0576	UTE	43-047-31964
NBU #129	SENE	22	9	21	U-010950-A	UTE	43-047-31965
NBU #130	SWNW	22	9	21	U-0147566	UTE	43-047-31967
NBU #131	NWSW	23	9	21	U-0149075	UTE	43-047-31966
NBU #132	NWNW	26	9	21	ST U-01194	STATE	43-047-31938
NBU #133	SWNE	28	9	21	U-0576	FED.	43-047-31950
NBU #134	SWSW	28	9	21	U-0576	FED.	43-047-32011
NBU #135	NESE	18	9	22	U-461	UTE	43-047-32089
NBU #136	SWSE	19	9	22	U-0284	UTE	43-047-31968
NBU #137	SESE	30	9	22	ST ML-22935	STATE	43-047-31939
NBU #138A	SENE	33	9	22	U-01191-A	FED.	43-047-32151
NBU #139	SWNE	14	10	21	U-465	FED.	43-047-31948
NBU #140	NWNE	5	10	22	U-01191A	FED.	43-047-31947
NBU #141	SENW	6	10	22	U-464	FED.	43-047-32017
NBU #142	NESE	10	10	22	U-025187	FED.	43-047-32013
NBU #143	NWNE	10	9	21	U-0141315	UTE	43-047-32088
NBU #144	NWNW	23	9	21	U-0149075	UTE	43-047-32044
NBU #145	NWNE	27	9	21	ST U-01194-A	STATE	43-047-31976
NBU #146	SWNW	14	10	21	U-465	FED.	43-047-31985
NBU #147	NWSW	4	10	22	U-01191	FED.	43-047-31984
NBU #148	SESW	4	10	22	U-01191	FED.	43-047-31983
NBU #149	NESE	5	10	22	U-01191	FED.	43-047-31982
NBU #150	SENW	9	10	22	U-01196-B	FED.	43-047-31992
NBU #151	NWNW	9	10	22	U-01196-B	FED.	43-047-31991
NBU #152	SESE	9	10	22	U-01196-D	FED.	43-047-31990
NBU #153	SWNW	11	10	22	ST U-01197-A	STATE	43-047-31975
NBU #154	NWSE	26	9	21	ST ML-22934	STATE	43-047-32003
NBU #155	SENW	31	9	22	ST ML-23607	STATE	43-047-32004
NBU #156	SWNW	35	9	21	ST U-01194	STATE	43-047-32005
NBU #157	SESW	32	9	22	ST ML-22649	STATE	43-047-32007
NBU #158	NWSE	27	9	21	ST U-01194-A	STATE	43-047-31997
NBU #159	NESW	35	9	21	ST U-01194	STATE	43-047-31996
NBU #160	SESW	31	9	22	ST ML-22935-A	STATE	43-047-32006
NBU #161	SESE	32	9	22	ST ML-22649	STATE	43-047-32023
NBU #162	SENW	12	10	20	U-4478	FED.	43-047-32066
NBU #163	NENW	14	10	21	U-465	FED.	43-047-32069
NBU #164	NWSE	3	10	22	U-01191-A	FED.	43-047-32055
NBU #165	NENW	3	10	22	U-01191	FED.	43-047-32057
NBU #166	SWSE	28	9	21	U-0576	FED.	43-047-32065
NBU #167	SESW	25	9	21	ST U-01194	STATE	43-047-32054
NBU #168	NWSW	12	10	20	U-4478	FED.	43-047-32117
NBU #169	SESW	12	10	20	U-4478	FED.	43-047-32118

WELL #	LOCATION				STATE OR BLM		API NUMBER
	QUAD	SEC	TWP	RGE	LEASE #	SURFACE	
NBU #170	NWNW	4	10	22	U-01191-A	FED.	43-047-32169
NBU #171	SENE	5	10	22	U-01191-A	FED.	43-047-32115
NBU #172	NENE	19	9	22	U-0284	UTE	43-047-32194
NBU #173	NWNE	33	9	22	U-01191-A	FED.	43-047-32116
NBU #174	NWNW	11	9	21	U-0141315	UTE	43-047-32193
NBU #175	NENW	28	9	21	U-0576	FED.	43-047-32143
NBU #176	SWNW	28	9	21	U-0576	FED.	43-047-32144
NBU #177	NESE	29	9	21	U-0581	FED.	43-047-32112
NBU #178	NWNE	30	9	21	U-0581	FED.	43-047-32121
NBU #179	SWSW	10	10	21	U-01416-A	FED.	43-047-32145
NBU #180	SWSE	10	10	22	U-025187	FED.	43-047-32113
NBU #181	SESW	9	9	21	U-0576	UTE	43-047-32161
NBU #182	SENW	11	9	21	U-0141315	UTE	43-047-32162
NBU #183	SWNW	27	9	21	ST U-01194-A	STATE	43-047-32122
NBU #184	SESW	30	9	22	U-463	FED.	43-047-32170
NBU #185	SWNE	3	10	22	U-01191-A	FED.	43-047-32171
NBU #186	SENE	30	9	22	U-463	FED.	43-047-
NBU #187	SESW	34	9	22	U-0149077	FED.	43-047-
NBU #188	SWSW	10	10	22	U-01196-C	FED.	43-047-
NBU #189	SESW	23	9	21	U-0149075	UTE	43-047-
NBU #190	NWNE	26	9	21	ST U-01194	STATE	43-047-
CIGE 110-7-9-21	SWSE	7	9	21	U-0575-B	UTE	43-047-31959
CIGE 111-13-9-21	SESW	13	9	21	U-01193	UTE	43-047-31954
CIGE 112-19-9-21	SESE	19	9	21	U-0581	UTE	43-047-31945
CIGE 113-21-9-21	SWNE	21	9	21	U-0576	UTE	43-047-31944
CIGE 114-34-9-21	NESE	34	9	21	ST U-01194-A	STATE	43-047-31915
CIGE 115-35-9-21	NWNE	35	9	21	ST ML-22582	STATE	43-047-31918
CIGE 116-29-9-22	NWSW	29	9	22	ST ML-22935	STATE	43-047-31919
CIGE 117-34-9-22	SWNW	34	9	22	U-0149077	FED.	43-047-31928
CIGE 118-35-9-22	NESE	35	9	22	U-010954A	FED.	43-047-32025
CIGE 119-15-10-21	NENE	15	10	21	U-01416-A	FED.	43-047-31927
CIGE 120-15-9-20	SENE	15	9	20	U-0144868	UTE	43-047-32032
CIGE 121-15-9-20	NWNE	15	9	20	U-0144868	UTE	43-047-32031
CIGE 122-7-9-21	NENE	7	9	21	U-0149767	UTE	43-047-32098
CIGE 123-7-9-21	SWNE	7	9	21	U-0575-B	UTE	43-047-32047
CIGE 124-9-9-21	NWSE	9	9	21	U-01188	UTE	43-047-32045
CIGE 125-13-9-21	NWNW	13	9	21	U-01193	UTE	43-047-32084
CIGE 126-13-9-21	NWSW	13	9	21	U-01193	UTE	43-047-32087
CIGE 127-16-9-21	NESW	16	9	21	ST ML-3141	UTE	43-047-32036
CIGE 128-18-9-21	NENE	18	9	21	U-0575	UTE	43-047-32046
CIGE 129-18-9-21	NENW	18	9	21	U-0581	UTE	43-047-32043
CIGE 130-19-9-21	NENE	19	9	21	U-0581	UTE	43-047-32030
CIGE 131-19-9-21	SWNE	19	9	21	U-0581	UTE	43-047-32029
CIGE 132-20-9-21	NWSW	20	9	21	U-0575	UTE	43-047-32028
CIGE 133-35-9-21	SWSE	35	9	21	ST ML-22582	STATE	43-047-31978
CIGE 134-1-10-20	SWSW	1	10	20	U-02270-A	FED.	43-047-31989
CIGE 135-3-10-21	SWSW	3	10	21	U-0149078	FED.	43-047-32001
CIGE 136-4-10-21	SWNE	4	10	21	ST ML-22940	STATE	43-047-31979
CIGE 137-6-10-21	SENE	6	10	21	U-01791	FED.	43-047-31988
CIGE 138A-6-10-21	SENW	6	10	21	U-01791	FED.	43-047-31987
CIGE 139-10-10-21	SWNE	10	10	21	U-0149079	FED.	43-047-31986
CIGE 140-16-10-21	NENE	16	10	21	ST ML-10755	STATE	43-047-31977
CIGE 141-7-10-22	NWNE	7	10	22	ST ML-23609	STATE	43-047-31970
CIGE 142-25-9-21	SENE	25	9	21	ST U-01189	STATE	43-047-31994
CIGE 143-34-9-21	SWNE	34	9	21	ST U-01194-A	STATE	43-047-31995
CIGE 144-2-10-22	SWNE	2	10	22	ST ML-22651	STATE	43-047-32022
CIGE 145-29-9-22	SENW	29	9	22	ST ML-22935	STATE	43-047-31993
CIGE 146-16-10-21	NWNE	16	10	21	ST ML-10755	STATE	43-047-32021
CIGE 147-36-9-22	SESW	36	9	22	ST ML-22650	STATE	43-047-32020
CIGE 148-31-9-22	NWNE	31	9	22	ST ML-22935-A	STATE	43-047-32024
CIGE 149-8-10-21	NWNE	8	10	21	U-01791	FED.	43-047-32056
CIGE 150-9-10-21	SWNE	9	10	21	U-01416	FED.	43-047-32058
CIGE 151-10-10-21	SWSE	10	10	21	U-0149079	FED.	43-047-32059
CIGE 152-33-9-22	SESW	33	9	22	U-01191-A	FED.	43-047-32068
CIGE 153-35-9-22	SESW	35	9	22	U-010954A	FED.	43-047-32067
CIGE 154-13-10-20	NWNW	13	10	20	U-4485	STATE	43-047-32119
CIGE 155-9-9-21	SENE	9	9	21	U-01188-B	UTE	43-047-32157

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

5. Lease Designation and Serial No.  
UTU-01416

6. If Indian, Allottee or Tribe Name

N/A  
7. If Unit or CA, Agreement Designation

SUBMIT IN TRIPLICATE

1. Type of Well

Oil Well  Gas Well  Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No

P. O. Box 749 Denver, CO 80201-0749 (303) 573-4476

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

2093' FNL & 1724' FEL  
Section 9, T10S-R21E

Natural Buttes Unit

8. Well Name and No.

CIGE #150-9-10-21

9. API Well No.

43-047-32058

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah County, Utah

CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- Notice of Intent
- Subsequent Report
- Final Abandonment Notice

TYPE OF ACTION

- Abandonment
- Recompletion
- Plugging Back
- Casing Repair
- Altering Casing
- Other Bullhead Squeeze
- Change of Plans
- New Construction
- Non-Routine Fracturing
- Water Shut-Off
- Conversion to Injection
- Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Please see the attached chronological history for the bullhead squeeze procedure performed on the above referenced well.

RECEIVED

APR 23 1992

DIVISION OF  
OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Signed [Signature] Title Regulatory Analyst

Date 4/20/92

(This space for Federal or State office use)

Approved by \_\_\_\_\_  
Conditions of approval, if any:

Title \_\_\_\_\_

Date \_\_\_\_\_

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*See instruction on Reverse Side

THE COASTAL CORPORATION  
PRODUCTION REPORT

CHRONOLOGICAL HISTORY

CIGE #150  
SW/NE SECTION 9-T10S-R21E  
NATURAL BUTTES UNIT  
UINTAH COUNTY, UTAH  
WI: 100% CIGE AFE: 18162  
TD: 5850' SD: 10/26/91  
CSG: 5-1/2" @ 5845'  
PERFS: 4993'-5493'  
CWC(M\$): \$358.8

PAGE 2

4/2/92 SI, WO frac. MIRU Western Company. Cemented 8-5/8" x 5-1/2" csg  
annulus w/20 bbl LCM pill, 55 sx Class "G" + 2% CaCl<sub>2</sub> + .7% CF-2 + 3  
#/sk Hi-Seal 3 + 1/4 #/sk Cello Seal & 200 sx Class "G" + 3% CaCl<sub>2</sub> +  
.7% CF-2. Max pressure 150 psi while pmpg LCM pill, vac remainder of  
job. Drop from report.  
DC: \$6,570 TC: \$209,917

**RECEIVED**

APR 23 1992

DIVISION OF  
OIL, GAS & MINING

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

**SUBMIT IN TRIPLICATE**

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other	5. Lease Designation and Serial No. UTU-01416
2. Name of Operator Coastal Oil & Gas Corporation	6. If Indian, Allottee or Tribe Name N/A
3. Address and Telephone No. P.O. Box 749 Denver, CO 80201-0749 (303) 573-4476	7. If Unit or CA, Agreement Designation Natural Buttes Unit
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 2093' FNL and 1724' FEL Section 9, T10S, R21E	8. Well Name and No. CIGE #150-9-10-21
	9. API Well No. 43-047-32058
	10. Field and Pool, or Exploratory Area Natural Buttes
	11. County or Parish, State Uintah County, UT

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Abandonment
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input checked="" type="checkbox"/> Other <u>Bullhead Re-squeeze</u>
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log (form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

4/16/92: MIRU Western Company. Re-cmt 8-5/8" x 5-1/2" csg annulus w/110 sx Cl "G" + 2% CaCl<sub>2</sub> + .7% CF-2 + 3#/sk Hi-seal 3 + 1/4#/sk Cello Seal & 60 sx Cl "G" + 2% CaCl<sub>2</sub> + .7% CF-2. Max press 200 psi @ end of job. Vac 15 min later.

**RECEIVED**

JUL 17 1992

DIVISION OF  
OIL GAS & MINING

14. I hereby certify that the foregoing is true and correct.

Signed [Signature] Title Regulatory Analyst Date 7/15/92

(This space for Federal or State office use)

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_  
Conditions of approval, if any: \_\_\_\_\_

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

5. Lease Designation and Serial No.

UTU-01416

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA, Agreement Designation

Natural Buttes Unit

8. Well Name and No.

CIGE 150-9-10-21

9. API Well No.

43-047-32058

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah County, Utah

**SUBMIT IN TRIPLICATE**

1. Type of Well

Oil Well  Gas Well  Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No.

P.O. Box 749 Denver, CO 80201-0749 (303) 573-4476

4. Location of Well (Fontage, Sec., T., R., M., or Survey Description)

2093' FNL and 1724' FEL  
Section 9, T10S, R21E

**CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

**TYPE OF SUBMISSION**

Notice of Intent  
 Subsequent Report  
 Final Abandonment Notice

**TYPE OF ACTION**


Abandonment  
 Recompletion  
 Plugging Back  
 Casing Repair  
 Altering Casing  
 Other Fracture Treat

Change of Plans  
 New Construction  
 Non-Routine Fracturing  
 Water Shut-Off  
 Conversion to Injection  
 Dispose Water

(Note: Report refers to multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Please see the attached chronological history for the fracture treatment performed on the above-referenced well.



14. I hereby certify that the foregoing is true and correct

Signed [Signature] Title Regulatory Analyst

Date 8/6/92

(This space for Federal or State office use)

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_  
Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

THE COASTAL CORPORATION  
PRODUCTION REPORT

CHRONOLOGICAL HISTORY

CIGE #150  
SW/NE SECTION 9-T10S-R21E  
NATURAL BUTTES UNIT  
UINTAH COUNTY, UTAH  
WI: 100% CIGE AFE: 18162

PAGE 3

7/25/92 Flwg 1.5 MMCFD CO<sub>2</sub>, FTP 1000 psi, CP 950 psi on 18/64" chk. 40-50 BWP.

7/26/92 Flwg 2.0 MMCFD, FTP 950 psi, CP 900 psi on 18/64" chk, 20 BWP. Gas will burn.

7/27/92 Well shut-in @ 3:15 p.m., 7/26/92. Flwd 1.9 MMCFD, FTP 950 psi, CP 900 psi on 18/64" chk. Gas will burn. Drop from report.

THE COASTAL CORPORATION  
PRODUCTION REPORT

CHRONOLOGICAL HISTORY

PAGE 2

CIGE #150  
SW/NE SECTION 9-T10S-R21E  
NATURAL BUTTES UNIT  
UINTAH COUNTY, UTAH  
WI: 100% CIGE AFE: 18162  
TD: 5850' SD: 10/26/91  
CSG: 5-1/2" @ 5845'  
PERFS: 4993'-5493'  
CWC(M\$): \$358.8

- 11/6/91 Prep to run CBL. MIRU Welltech #247. NU BOP. PU 4-3/4" mill and 186 jts 2-3/8" tbg. RIH, tag PBD @ 5788'. Circ hole w/130 bbls 3% KCl wtr. POOH w/tbg & mill.  
DC: \$22,130 TC: \$194,685
- 11/7/91 Flow test well. MIRU wireline company. Ran CBL-CCL-GR log from LTD @ 5772' to 1490'. TOC @ 1700'. PT csg to 5000 psi. RIH w/4" csg gun. Perf 10 holes from 4993' to 5493'. RD HLS. RIH w/158 jts 2-3/8" tbg. Land tbg @ 4937' w/notched collar on btm, SN 1-jt above btm, 10' blast joint on top. ND BOP, NU WH, RU Smith Energy. Breakdown perfs w/4000 gals 3% KCl wtr w/additives and 20 ball sealers. AIR 7.7 BPM @ 4200 psi. Balled off perfs. Surged off balls. Finish job. ISIP 990 psi. 15 min 890 psi. Flwd back 2 hrs, well kicked off.  
DC: \$8,662 TC: \$203,347
- 11/8/91 Flwg 1200 MCFD, FTP 500 psi, CP 600 psi, 20/64" chk, 2-3 BWPH.
- 11/9/91 SI, waiting on frac. Flwg 1200 MCFD, FTP 500 psi, CP 600 psi, 20/64" chk. Left tbg in hole. Drop from report until further activity.
- 4/2/92 SI, WO frac. MIRU Western Company. Cemented 8-5/8" x 5-1/2" csg annulus w/20 bbl LCM pill, 55 sx Class "G" + 2% CaCl<sub>2</sub> + .7% CF-2 + 3 #/sk Hi-Seal 3 + 1/4 #/sk Cello Seal & 200 sx Class "G" + 3% CaCl<sub>2</sub> + .7% CF-2. Max pressure 150 psi while pmpg LCM pill, vac remainder of job. Drop from report.  
DC: \$6,570 TC: \$209,917
- 4/16/92 SI, WO frac. MIRU Western Company. Re-cmt 8-5/8" x 5-1/2" csg annulus w/110 sx Class "G" + 2% CaCl<sub>2</sub> + .7% CF-2 + 3#/sk Hi-Seal 3 + 1/4 #/sk Cello Seal and 60 sx Class "G" + 2% CaCl<sub>2</sub> + .7% CF-2. Max press 200 psi @ end of job. Vac 15 min later. Drop from report.  
DC: \$4,460 TC: \$214,377
- 7/24/92 Flwg back after frac. Set & fill frac tanks & CO<sub>2</sub> vessels. RU Western Company. Frac well w/70,250 gal gelled 3% KCl wtr w/30% CO<sub>2</sub> & 126,500# 20/40 sand as follows:
- 19,700 gal pad.
  - 11,500 gal w/1 ppg sand.
  - 11,500 gal w/2 ppg sand.
  - 11,500 gal w/3 ppg sand.
  - 5,750 gal w/4 ppg sand.
  - 5,750 gal w/6 ppg sand.
  - 4,550 gal flush.
- AIR 30 BPM @ 3460 psi. ISIP 1950 psi, 15 min 1820 psi. RD Western. Start flow back on 18/64" chk @ 4:00 p.m. TLTR 1397 bbls.  
DC: \$52,420 TC: \$266,797
- 7/24/92 Flwg 1.2 MMCFD CO<sub>2</sub>, FTP 850 psi, CP 625 psi on 18/64" chk. 96 BWPD.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

5. Lease Designation and Serial No.

UTU-01416

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA Agreement Designation

Natural Buttes Unit

8. Well Name and No.

CIGE 150-9-10-21

9. API Well No.

43-047-32058

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah County, Utah

**SUBMIT IN TRIPLICATE**

1. Type of Well

Oil Well  Gas Well  Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No.

P.O. Box 749 Denver, CO 80201-0749 (303) 573-4476

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

2093' FNL & 1724' FEL  
Section 9, T10S, R21E

**CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

**TYPE OF SUBMISSION**

Notice of Intent  
 Subsequent Report  
 Final Abandonment Notice

**TYPE OF ACTION**

Abandonment  
 Recompletion  
 Plugging Back  
 Casing Repair  
 Altering Casing  
 Other First Sales

Change of Plans  
 New Construction  
 Non-Routine Fracturing  
 Water Shut-Off  
 Conversion to Injection  
 Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

The above-referenced well was connected to CIG's gas salesline and first sales occurred at 1:15 PM, 8/10/92 w/a rate of 1715 MCFPD, 0 BOPD, 0 BWPD, FTP 1586, SICP 1327, and 11/64" choke.

RECEIVED

OCT 02 1992

DIVISION OF  
OIL GAS & MINING

14. I hereby certify that the foregoing is true and correct

Signed [Signature] Title Regulatory Analyst

Date 9/30/92

(This space for Federal or State office use)

Approved by \_\_\_\_\_  
Conditions of approval, if any:

Title \_\_\_\_\_

Date \_\_\_\_\_

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



**CIGE #150**  
Natural Buttes Field  
Section 9-T10S-R21E *uum 8/25/95*

**WELL DATA:**

Location: 2093' FNL 1724' FEL Sec. 9-T10S-R21E  
Elevation: 5060' GR, 5072' KB  
Total Depth: 5850', PBTB 5788'  
Casing: 8-5/8" 24# K-55 ST&C @ 267' w/150 sx  
5-1/2" 17# K-55 LT&C @ 5845' w/780 sx  
Top Job w/365 sx (4/92)  
Tubing: 2-3/8" 4.7# J-55 @ 4937'  
Formation: Wasatch (4993'-5493'- 1 holes)

**PROCEDURE:**

1. MI & RU. Kill well w/3% KCL water. ND WH. NU BOP. ~~POOH w/2-3/8" tubing.~~
2. RIH w/tbg to tag new PBTB (5669' WLS). ~~POOH w/2-3/8" tubing.~~ *uum*
3. RU & perforate Wasatch w/4" casing gun (4 JSPF). Perforate from FDC-CNL log (10/91):

4993	5019	5200
5002	5025	5493
5005	5154	
5010	5158	
4. RIH w/2-3/8" tbg to 5512' (new EOT). Install plunger lift stop via WL. ND BOP. NU WH. RD & MO. Complete installation of plunger lift equipment.
5. After returning the well to sales line, obtain rates and pressures.

Rate prior to W/O (8/09/95): 109 MCF, on 8/64" choke (FTP 325#, CP 325#, LP 266#).

WELL C16E 150-9-10-21  
Locat 2093' FN 1724' FEL Sec 9 T10S

KB. 5072' GR 5060'

8 5/8" OD 24 LB. K-55 STC CSG. w/ 150 SX

TOP Job (4/92)  
TOC @ 2553' + 110 SX

8 5/8" O  
267'

5 1/2" OD 17 LB. J-55 WFC CSG. w/ 780'

TOC @ 1700' before top job.

2 3/8" O.D., 4.7", J-55 @ 4937'

4993  
5002  
5005  
5010  
5019  
5025

5154  
5158  
5200

S.FL 5250

WLS 8 5/8"  
564

POST 5788

5 1/2" O

5815

(7/92) Wasatch (4993' - 5293' 10 holes) 5243 mp

PERF w/ 4" c.gun (1 ISPF) 4993', 5002', 5005, 5010, 5019

5025, 5154, 5158, 5200, 5493

BD w/ 4000 gal 3% KCL water + 20 BS IPF 1200 MCF on 2 3/4" CWK

FRAC w/ 126,500# 20/40 SAND + 70,250 gal Gel

IPF (7/92) 100 MCF on 1 3/4" CWK FTP 950\* CP 900\*

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

18546

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT" - for such proposals

5. Lease Designation and Serial No.

UTU-01416

6. If Indian, Alottee or Tribe Name

N/A

7. If Unit or CA, Agreement Designation

Natural Buttes Unit

8. Well Name and No.

CIGE #150-9-10-21

9. API Well No.

43-047-32058

10. Field and Pool, Or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah County, Utah

**SUBMIT IN TRIPLICATE**

1. Type of Well

Oil Well  Gas Well  Other

2. Name of Operator

CIG Exploration, Inc.

3. Address and Telephone No.

P. O. Box 749, Denver, CO 80201-0749 (303) 573-4476

4. Location of Well (Footage, Sec., T., R., M., Or Survey Description)

2093' FNL & 1724' FEL  
SW/NE Section 9, T10S-R21E

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

Notice of Intent  
 Subsequent Report  
 Final Abandonment Notice


Abandonment  
 Recompletion  
 Plugging Back  
 Casing Repair  
 Altering Casing  
 Other Reperf, lower tbg, install  
plunger lift

Change of Plans  
 New Construction  
 Non-Routine Fracturing  
 Water Shut-Off  
 Conversion to Injection  
 Dispose Water

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markets and zones pertinent to this work.)\*

Please see the attached procedure to reperfurate existing Wasatch perforations, lower tubing, and install plunger lift equipment.



14. I hereby certify that the foregoing is true and correct.

Signed Bonnie Johnston Title Sr. Environmental & Safety Analyst Date 09/15/95

**Bonnie Johnston**

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ Title \_\_\_\_\_ Date 8/5/96

Conditions of approval, if any: tax credit

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*See Instruction on Reverse Side

**CIGE #150**  
Natural Buttes Field  
Section 9-T10S-R21E *Hum 8/25/95*

**WELL DATA:**

Location: 2093' FNL 1724' FEL Sec. 9-T10S-R21E  
Elevation: 5060' GR, 5072' KB  
Total Depth: 5850', PBSD 5788'  
Casing: 8-5/8" 24# K-55 ST&C @ 267' w/150 sx  
5-1/2" 17# K-55 LT&C @ 5845' w/780 sx  
Top Job w/365 sx (4/92)  
Tubing: 2-3/8" 4.7# J-55 @ 4937'  
Formation: Wasatch (4993'-5493'- 1 holes)

**PROCEDURE:**

1. MI & RU. Kill well w/3% KCL water. ND WH. NU BOP. ~~POOH w/2-3/8" tubing.~~
2. RIH w/tbg to tag new PBSD (5669' WLS). ~~POOH w/2-3/8" tubing.~~ *Hum*
3. RU & perforate Wasatch w/4" casing gun (4 JSPF). Perforate from FDC-CNL log (10/91):

4993	5019	5200
5002	5025	5493
5005	5154	
5010	5158	
4. RIH w/2-3/8" tbg to 5512' (new EOT). Install plunger lift stop via WL. ND BOP. NU WH. RD & MO. Complete installation of plunger lift equipment.
5. After returning the well to sales line, obtain rates and pressures.

Rate prior to W/O (8/09/95): 109 MCF, on 8/64" choke (FTP 325#, CP 325#, LP 266#).

WELL (16E 150-9-10-21)  
Loc 2093 FN 1784 FEL Sec 9 T103 R1E

KB. 5072' GR 5060'

8 5/8" OD 24 LB. K-55 STC CSG. w/ 150 SX  
TOP Job (4/92)  
TOC @ 2553x + 1105x

8 5/8" O  
267'

5 1/2" OD 17 LB. J-55 HSC CSG. w/ 780'  
TOC @ 1700' before top job.

2 3/8" O.D., 4.7", J-55 @ 4937'

4993  
5002  
5005  
5010  
5019  
5025

5154  
5158  
5200

S.FL 5250

(7/92) Wasatch (4993' - 5493' 10 holes) 5243 mp  
PERM w/ 4" gun (1 ISPF) 4993', 5002', 5005, 5010, 5019  
5025, 5154, 5158, 5200, 5493  
BD w/ 4000 gal 3% KCL water + 20 BS IPF 1200 MCF on 20/64" CWK  
FRAC w/ 126,500\* 20/40 SAND + 70,250 gal Gel  
IPF (7/92) 1900 MCF on 18/64" CWK FTP 950\* CP 900\*

WLS 8 5/8"  
5669

5493

POST 5700

5 1/2" O

5845

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:

6. IF INDIAN ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

8. WELL NAME and NUMBER:

Exhibit "A"

9. API NUMBER:

10. FIELD AND POOL, OR WILDCAT:

1. TYPE OF WELL: OIL WELL  GAS WELL  OTHER \_\_\_\_\_

2. NAME OF OPERATOR:  
El Paso Production Oil & Gas Company

3. ADDRESS OF OPERATOR: 8 South 1200 East CITY Vernal STATE Utah ZIP 84078 PHONE NUMBER: 435-789-4433

4. LOCATION OF WELL  
FOOTAGES AT SURFACE: \_\_\_\_\_ COUNTY: \_\_\_\_\_

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: \_\_\_\_\_ STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Name Change</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.  
As a result of the merger between The Coastal Corporation and a wholly owned subsidiary of El Paso Energy Corporation, the name of Coastal Oil & Gas Corporation has been changed to El Paso Production Oil & Gas Company effective March 9, 2001.

See Exhibit "A"

Bond # 400JU0708

NAME (PLEASE PRINT) Coastal Oil & Gas Corporation John T. Elzner TITLE Vice President

SIGNATURE [Signature] DATE 06-15-01

NAME (PLEASE PRINT) El Paso Production Oil & Gas Company John T. Elzner TITLE Vice President

SIGNATURE [Signature] DATE 06-15-01

(This space for State use only)

RECEIVED

JUN 19 2001

DIVISION OF OIL, GAS AND MINING

State of Delaware  
*Office of the Secretary of State*

---

PAGE 1

I, HARRIET SMITH WINDSOR, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF AMENDMENT OF "COASTAL OIL & GAS CORPORATION", CHANGING ITS NAME FROM "COASTAL OIL & GAS CORPORATION" TO "EL PASO PRODUCTION OIL & GAS COMPANY", FILED IN THIS OFFICE ON THE NINTH DAY OF MARCH, A.D. 2001, AT 11 O'CLOCK A.M.

RECEIVED

JUN 1 2001

DIVISION OF  
OIL, GAS AND MINING



*Harriet Smith Windsor*  
*Harriet Smith Windsor, Secretary of State*

0610204 8100

010162788

AUTHENTICATION: 1061007

DATE: 04-03-01

CERTIFICATE OF AMENDMENT

OF

CERTIFICATE OF INCORPORATION

COASTAL OIL & GAS CORPORATION (the "Company"), a corporation organized and existing under and by virtue of the General Corporation Law of the State of Delaware, DOES HEREBY CERTIFY:

FIRST: That the Board of Directors of the Company, by the unanimous written consent of its members, filed with the minutes of the Board, adopted a resolution proposing and declaring advisable the following amendment to the Certificate of Incorporation of the Company:

RESOLVED that it is deemed advisable that the Certificate of Incorporation of this Company be amended, and that said Certificate of Incorporation be so amended, by changing the Article thereof numbered "FIRST." so that, as amended, said Article shall be and read as follows:

"FIRST. The name of the corporation is El Paso Production Oil & Gas Company."

SECOND: That in lieu of a meeting and vote of stockholders, the stockholders entitled to vote have given unanimous written consent to said amendment in accordance with the provisions of Section 228 of the General Corporation Law of the State of Delaware.

THIRD: That the aforesaid amendment was duly adopted in accordance with the applicable provisions of Sections 242 and 228 of the General Corporation Law of the State of Delaware.

IN WITNESS WHEREOF, said COASTAL OIL & GAS CORPORATION has caused this certificate to be signed on its behalf by a Vice President and attested by an Assistant Secretary, this 9th day of March 2001.

COASTAL OIL & GAS CORPORATION

David L. Siddall
Vice President

Attest:

Margaret E. Roark
Margaret E. Roark, Assistant Secretary

RECEIVED

STATE OF DELAWARE
SECRETARY OF STATE
DIVISION OF CORPORATIONS
FILED 11:00 AM 03/09/2001
010118394 - 0610204

JUN 19 2001

DIVISION OF
OIL, GAS AND MINING



# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155

# RECEIVED

JUL 12 2001

DIVISION OF  
OIL, GAS AND MINING

In Reply Refer To:  
3106  
UTSL-065841  
(UT-924)

JUL 10 2001

### NOTICE

El Paso Production Oil & Gas Company : Oil and Gas  
Nine Greenway Plaza :  
Houston TX 77046-0095 :

#### Name Change Recognized

Acceptable evidence has been received in this office concerning the name change of Coastal Oil & Gas Corporation into El Paso Production Oil & Gas Company with El Paso Production Oil & Gas Company being the surviving entity.

For our purposes, the name change is recognized effective March 9, 2001.

The oil and gas lease files identified on the enclosed exhibit have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Coastal Oil & Gas Corporation to El Paso Production Oil & Gas Company. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Wyoming and Colorado.



Opolonia L. Abeyta  
Acting Chief, Branch of  
Minerals Adjudication

Enclosure

1. Exhibit of Leases (1 pp)

cc: Moab Field Office  
Vernal Field Office  
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217  
~~State of Utah, DOGM~~, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114  
Teresa Thompson (UT-922)  
Joe Incardine (UT-921)

## Exhibit of Leases

UTUSL-065841A	UTU-47172	UTU-74415	UTU-53860
UTU-28652	UTU-50687	UTU-74416	UTU-66401
UTU-37943	UTU-52298	UTU-75091	UTU-67868
UTU-44089	UTU-0109054	UTU-75096	UTU-65389
UTU-44090A	UTU-0143511	UTU-75097	UTU-77084
UTU-61263	UTU-0143512	UTU-75673	UTU-61430
UTU-00343	UTU-38401	UTU-76259	UTU-72633
UTU-02651	UTU-38411	UTU-76260	UTU-72650
UTU-02651B	UTU-38418	UTU-76261	UTU-49692
UTU-0142175	UTU-38419	UTU-76493	UTU-57894
UTU-70235	UTU-38420	UTU-76495	UTU-76829
UTU-70406	UTU-38421	UTU-76503	UTU-76830
UTU-74954	UTU-38423	UTU-78228	UTU-76831
UTU-75132	UTU-38424	UTU-78714	
UTU-75699	UTU-38425	UTU-78727	
UTU-76242	UTU-38426	UTU-78734	
UTU-78032	UTU-38427	UTU-79012	
UTU-4377	UTU-38428	UTU-79011	
UTU-4378	UTU-53861	UTU-71694	
UTU-7386	UTU-58097	UTU-00576	
UTU-8344A	UTU-64376	UTU-00647	
UTU-8345	UTU-65222	UTU-01470D	
UTU-8347	UTU-65223	UTU-0136484	
UTU-8621	UTU-66746	UTU-8344	
UTU-14646	UTU-67178	UTU-8346	
UTU-15855	UTU-67549	UTU-8648	
UTU-25880	UTU-72028	UTU-28212	
UTU-28213	UTU-72632	UTU-30289	
UTU-29535	UTU-73009	UTU-31260	
UTU-29797	UTU-73010	UTU-33433	
UTU-31736	UTU-73013	UTU-34711	
UTU-34350	UTU-73175	UTU-46699	
UTU-34705	UTU-73434	UTU-78852	
UTU-37116	UTU-73435	UTU-78853	
UTU-37355	UTU-73444	UTU-78854	
UTU-37573	UTU-73450	UTU-075939	
UTU-38261	UTU-73900	UTU-0149767	
UTU-39223	UTU-74409	UTU-2078	
UTU-40729	UTU-74410	UTU-44426	
UTU-40736	UTU-74413	UTU-49530	
UTU-42469	UTU-74414	UTU-51026	

**OPERATOR CHANGE WORKSHEET**

**ROUTING**

1. GLH		4-KAS
2. CDW ✓		5-LP ✓
3. JLT		6-FILE

Enter date after each listed item is completed

Change of Operator (Well Sold)

Designation of Agent

Operator Name Change (Only)

**X Merger**

The operator of the well(s) listed below has changed, effective: **3-09-2001**

<b>FROM: (Old Operator):</b>
COASTAL OIL & GAS CORPORATION
Address: 9 GREENWAY PLAZA STE 2721
HOUSTON, TX 77046-0995
Phone: 1-(713)-418-4635
Account N0230

<b>TO: ( New Operator):</b>
EL PASO PRODUCTION OIL & GAS COMPANY
Address: 9 GREENWAY PLAZA STE 2721 RM 2975B
HOUSTON, TX 77046-0995
Phone: 1-(832)-676-4721
Account N1845

**CA No.**

**Unit: NATURAL BUTTES**

**WELL(S)**

NAME	API NO	ENTITY NO	SEC TWN RNG	LEASE TYPE	WELL TYPE	WELL STATUS
NBU CIGE 4-9-10-21	43-047-30334	2900	09-10S-21E	FEDERAL	GW	P
NBU CIGE 76D-9-10-21P	43-047-30955	2900	09-10S-21E	FEDERAL	GW	P
NBU 206-9	43-047-31165	2900	09-10S-21E	FEDERAL	GW	P
CIGE 101D-9-10-21	43-047-31736	2900	09-10S-21E	FEDERAL	GW	P
302-9E	43-047-32010	2900	09-10S-21E	FEDERAL	GW	P
CIGE 150-9-10-21	43-047-32058	2900	09-10S-21E	FEDERAL	GW	P
CIGE 227-9-10-21	43-047-32998	2900	09-10S-21E	FEDERAL	GW	P
NBU 431-9E	43-047-33069	2900	09-10S-21E	FEDERAL	GW	S
CIGE 254	43-047-33723	2900	09-10S-21E	FEDERAL	GW	P
NBU CIGE 57-10-10-21	43-047-30543	2900	10-10S-21E	FEDERAL	GW	P
NBU CIGE 77D-10-10-21P	43-047-30956	2900	10-10S-21E	FEDERAL	GW	P
NBU 115	43-047-31929	2900	10-10S-21E	FEDERAL	GW	P
CIGE 139-10-10-21	43-047-31986	2900	10-10S-21E	FEDERAL	GW	P
CIGE 151-10-10-21	43-047-32059	2900	10-10S-21E	FEDERAL	GW	P
NBU 266	43-047-32941	2900	10-10S-21E	FEDERAL	GW	P
NBU 267	43-047-32942	2900	10-10S-21E	FEDERAL	GW	P
NBU 332	43-047-33640	2900	10-10S-21E	FEDERAL	GW	P
NBU 366	43-047-33729	2900	10-10S-21E	FEDERAL	GW	DRL
NBU 268 (CA NW-127)	43-047-33001	2900	11-10S-21E	FEDERAL	GW	P
NBU 215 (CA NW-127)	43-047-32471	2900	12-10S-21E	FEDERAL	GW	P

**OPERATOR CHANGES DOCUMENTATION**

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 06/19/2001
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 06/19/2001
3. The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 06/21/2001
4. Is the new operator registered in the State of Utah: YES Business Number: 608186-0143

5. If NO, the operator was contacted contacted on: N/A
6. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the (merger, name change, or operator change for all wells listed on Federal or Indian leases on: 07/10/2001
7. **Federal and Indian Units:** The BLM or BIA has approved the successor of unit operator for wells listed on: 07/10/2001
8. **Federal and Indian Communization Agreements ("CA"):** The BLM or the BIA has approved the operator change for all wells listed involved in a CA on: 07/10/2001
9. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

---

**DATA ENTRY:**

1. Changes entered in the **Oil and Gas Database** on: 08/06/2001
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 08/06/2001
3. Bond information entered in RBDMS on: N/A
4. Fee wells attached to bond in RBDMS on: N/A

---

**STATE BOND VERIFICATION:**

1. State well(s) covered by Bond No.: N/A

---

**FEDERAL BOND VERIFICATION:**

1. Federal well(s) covered by Bond No.: WY 2793

---

**FEE WELLS - BOND VERIFICATION/LEASE INTEREST OWNER NOTIFICATION:**

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond No: N/A
2. The **FORMER** operator has requested a release of liability from their bond on: N/A  
The Division sent response by letter on: N/A
3. (R649-2-10) The **FORMER** operator of the Fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: \_\_\_\_\_

---

**FILMING:**

1. All attachments to this form have been **MICROFILMED** on: \_\_\_\_\_

---

**FILING:**

1. **ORIGINALS/COPIES** of all attachments pertaining to each individual well have been filed in each well file on: \_\_\_\_\_

---

**COMMENTS: Master list of all wells involved in operator change from Coastal Oil & Gas Corporation to El Paso Production Oil and Gas Company shall be retained in the "Operator Change File".**

---

---

---

---

---

JAN. 17. 2003 3:34PM

WESTPORT

NO. 173 P. 2

**WESTPORT OIL AND GAS COMPANY, L.P.**

410 Seventeenth Street #2300 Denver Colorado 80202-4436  
Telephone: 303 573 5404 Fax: 303 573 5609

February 1, 2002

Department of the Interior  
Bureau of Land Management  
2850 Youngfield Street  
Lakewood, CO 80215-7093  
Attention: Ms. Martha Maxwell

RE: BLM Bond CO-1203  
BLM Nationwide Bond 158626364  
Surety - Continental Casualty Company  
Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.  
Conversion of Westport Oil and Gas Company, Inc., into Westport Oil and Gas Company, L.P.  
Assumption Rider - Westport Oil and Gas Company, L.P.

Dear Ms. Maxwell:

Pursuant to our recent conversations, please find the following list of enclosures for the BLM's consideration and approval:

Two (2) Assumption Riders, fully executed originals.  
Copies of Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.  
Copies of Westport Oil and Gas Company, Inc., conversion into Westport Oil and Gas Company, L.P.  
List of all Federal/BIA/State Leases - Belco/Westport's leases - in all states.

Please inform us of any additional information needed to complete the change to Westport Oil and Gas Company, L.P., as operator of record.

I thank you for your assistance and cooperation in this matter. Please do not hesitate contacting the undersigned, should a question arise.

Sincerely,  
Westport Oil and Gas Company, L.P.

Debby J. Black  
Engineer Technician

Encl:



United States Department of the Interior **RECEIVED**

BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155

FEB 22 2002

DIVISION OF  
OIL, GAS AND MINING

In Reply Refer To:  
3106  
UTU-25566 et al  
(UT-924)

FEB 21 2002

NOTICE

Westport Oil and Gas Company L.P. : Oil and Gas  
410 Seventeenth Street, #2300 :  
Denver Colorado 80215-7093 :

Name Change Recognized

Acceptable evidence has been received in this office concerning the name change of Westport Oil and Gas Company, Inc. into Westport Oil and Gas Company, L.P. with Westport Oil and Gas Company, L.P. being the surviving entity.


For our purposes, the name change is recognized effective December 31, 2001.

The oil and gas lease files identified have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Westport Oil and Gas Company, Inc. to Westport Oil and Gas Company, L.P.. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Colorado.

UTU-03405  
UTU-20895  
UTU-25566  
UTU-43156  
UTU-49518  
UTU-49519  
UTU-49522  
UTU-49523



Robert Lopez  
Chief, Branch of  
Minerals Adjudication

cc: Moab Field Office  
Vernal Field Office  
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217  
State of Utah, DOGM, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114  
Teresa Thompson (UT-922)  
Joe Incardine (UT-921)

# memorandum

Branch of Real Estate Services  
Uintah & Ouray Agency

Date: 5 December, 2002

Reply to  
Attn of: Supervisory Petroleum Engineer

Subject: Modification of Utah Division of Oil, Gas and Mining Regulations

To: Director, Utah Division of Oil, Gas and Mining Division: John Baza

We have been advised of changes occurring with the operation of your database for Change of Operator. You will be modifying your records to reflect Change of Operator once you have received all necessary documentation from the companies involved, and perhaps in advance of our Notice of Concurrence/Approval of Change of Operator where Indian leases are involved.

We have no objection.

With further comment to Rulemaking, I wish to comment concerning the provision of Exhibits for upcoming Hearings. I would like to see the Uintah & Ouray Agency, BIA, and the Ute Indian Tribe, Energy & Mineral Resources Department added to the list of those parties that receive advance Exhibits so as to allow us to have research time prior to Hearing dates. We will be able to provide a more informed recommendation to the Oil, Gas and Mining Board. It would be best if we would receive only those Exhibits that concern Indian lands, specifically on or adjacent to Indian lands. This may be a difficult situation to attain, as it is not always clear where 'on or adjacent' occurs.

I am aware that you have gone to extra effort to correct this matter already, and I fully appreciate it. My request is intended only to allow the addition of Uintah & Ouray Agency and Ute Indian Tribe to the official listing.

We appreciate your concern, and hope that these comments are timely enough for consideration in the revision process.



CC: Minerals & Mining Section of RES  
Ute Energy & Mineral Resources Department: Executive Director  
chrono



# United States Department of the Interior

BUREAU OF INDIAN AFFAIRS  
Washington, D.C. 20240

FEB 10 2003

IN REPLY REFER TO:  
Real Estate Services

Carroll A. Wilson  
Principal Landman  
Westport Oil and Gas Company, L.P.  
1368 South 1200 East  
Vernal, Utah 84078

Dear Mr. Wilson:

This is in response to your request for approval of RLI Insurance Company's Nationwide Oil and Gas Lease Bond No. RLB0005239 executed effective December 17, 2002, (\$150,000 coverage) with Westport Oil and Gas Company, L. P., as principal.

This bond is hereby approved as of the date of this correspondence and will be retained in the Bureau of Indian Affairs' Division of Real Estate Services, 1849 C Street, NW, MS-4512-MIB, Washington, D.C. 20240. All Bureau oil and gas regional offices and the surety are being informed of this action.

In cases where you have existing individual and/or collective bonds on file with one or more of our regional offices, you may now request those offices, directly, to terminate in lieu of coverage under this Nationwide Bond.

Enclosed is a copy of the approved bond for your files. If we may be of further assistance in this matter, please advise.

Sincerely,

Director, Office of Trust Responsibilities

**ACTING**

Enclosure



# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155

IN REPLY REFER TO  
UT-922

February 27, 2003

Westport Oil and Gas Company, L.P.  
Attn: Gary D. Williamson  
1670 Broadway, Suite 2800  
Denver, Colorado 80202

Re: Natural Buttes Unit  
Uintah County, Utah

Gentlemen:

On February 27, 2003, we received an indenture dated December 17, 2002, whereby El Paso Production Oil & Gas Company resigned as Unit Operator and Westport Oil and Gas Company, L.P., was designated as Successor Unit Operator for the Natural Buttes Unit, Uintah County, Utah.

This indenture was executed by all required parties and the signatory parties have complied with Sections 5 and 6 of the unit agreement. The instrument is hereby approved effective February 27, 2003. In approving this designation, the Authorized Officer neither warrants nor certifies that the designated party has obtained all required approval that would entitle it to conduct operations under the Natural Buttes Unit Agreement.

Your nationwide (Colorado) oil and gas bond No. 1203 will be used to cover all operations within the Natural Buttes Unit.

It is requested that you notify all interested parties of the change in unit operator. Copies of the approved instruments are being distributed to the appropriate federal offices, with one copy returned herewith.

Sincerely,

/s/ Robert A. Henricks

Robert A. Henricks  
Chief, Branch of Fluid Minerals

Enclosure

bcc: Field Manager - Vernal (w/enclosure)  
SITLA  
Division of Oil, Gas & Mining  
Minerals Adjudication Group  
File - Natural Buttes Unit (w/enclosure)  
Agr. Sec. Chron  
Fluid Chron

UT922:TAThompson:tt:02/27/2003

RECEIVED

FEB 28 2003

DIV. OF OIL, GAS & MINING

STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER: \_\_\_\_\_

6. IF INDIAN, ALLOTTEE OR TRIBE NAME: \_\_\_\_\_

7. UNIT or CA AGREEMENT NAME: \_\_\_\_\_

8. WELL NAME and NUMBER:  
**Exhibit "A"**

9. API NUMBER: \_\_\_\_\_

10. FIELD AND POOL, OR WILDCAT: \_\_\_\_\_

1. TYPE OF WELL  
OIL WELL  GAS WELL  OTHER \_\_\_\_\_

2. NAME OF OPERATOR:  
**El Paso Production Oil & Gas Company**

3. ADDRESS OF OPERATOR:  
**9 Greenway Plaza** CITY: **Houston** STATE: **TX** ZIP: **77064-0995** PHONE NUMBER: **(832) 676-5933**

4. LOCATION OF WELL  
FOOTAGES AT SURFACE: \_\_\_\_\_ COUNTY: \_\_\_\_\_  
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: \_\_\_\_\_ STATE: **UTAH**

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	


12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Operator change to Westport Oil and Gas Company, L.P., 1670 Broadway, Suite 2800, Denver, CO. 80202-4800, effective December 17, 2002.

BOND # \_\_\_\_\_

State Surety Bond No. RLB0005236  
Fee Bond No. RLB0005238

EL PASO PRODUCTION OIL & GAS COMPANY

By:   
Jon R. Nelsen, Attorney-in-Fact

RECEIVED  
FEB 28 2003  
DIV. OF OIL, GAS & MINING

WESTPORT OIL AND GAS COMPANY, L.P.  
NAME (PLEASE PRINT) **David R. Dix** TITLE **Agent and Attorney-in-Fact**  
SIGNATURE  DATE **12/17/02**

(This space for State use only)

Form 3160-5  
(August 1999)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

5. Lease Serial No.  
**SEE ATTACHED EXHIBIT "A"**  
6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

8. Well Name and No.  
**SEE ATTACHED EXHIBIT "A"**

2. Name of Operator  
**WESTPORT OIL & GAS COMPANY, L.P.**

3a. Address  
**P.O. BOX 1148 VERNAL, UT 84078**  
3b. Phone No. (include area code)  
**(435) 781-7023**

9. API Well No.  
**SEE ATTACHED EXHIBIT "A"**  
10. Field and Pool, or Exploratory Area

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**SEE ATTACHED EXHIBIT "A"**

11. County or Parish, State  
**UINTAH COUNTY, UT**

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<b>SUCCESSOR OF OPERATOR</b>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and 2c. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed if testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator determined that the site is ready for final inspection.

WESTPORT OIL & GAS COMPANY, L.P., IS CONSIDERED TO BE THE OPERATOR ON THE ATTACHED DESCRIBED LANDS AND IS RESPONSIBLE UNDER THE TERMS AND CONDITIONS OF THE LEASE FOR THE OPERATIONS CONDUCTED ON THE LEASED LANDS OR PORTIONS THEREOF. BOND COVERAGE FOR THIS WELL IS PROVIDED BY FEDERAL NATIONWIDE BOND NO. 158626364, EFFECTIVE FEBRUARY 1, 2002, AND BIA NATIONWIDE BOND NO. RLB0005239, EFFECTIVE FEBRUARY 10, 2003.

RECEIVED

MAR 04 2003

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)  
**CHERYL CAMERON**

Title  
**OPERATIONS**

Signature  
*Cheryl Cameron*

Date  
**March 4, 2003**

THIS SPACE FOR FEDERAL OR STATE USE

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_  
Office \_\_\_\_\_

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

BUREAU OF LAND MANAGEMENT

**OPERATOR CHANGE WORKSHEET**

**ROUTING**

1. GLH
2. CDW ✓
3. FILE

**X Change of Operator (Well Sold)**

Designation of Agent/Operator

Operator Name Change

Merger

The operator of the well(s) listed below has changed, effective: **12-17-02**

<b>FROM: (Old Operator):</b>	<b>TO: ( New Operator):</b>
EL PASO PRODUCTION OIL & GAS COMPANY	WESTPORT OIL & GAS COMPANY LP
Address: 9 GREENWAY PLAZA	Address: P O BOX 1148
HOUSTON, TX 77064-0995	VERNAL, UT 84078
Phone: 1-(832)-676-5933	Phone: 1-(435)-781-7023
Account No. N1845	Account No. N2115

**CA No.**                      **Unit:**    **NATURAL BUTTES**

**WELL(S)**

NAME	SEC TWN RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
NBU 1-7B	07-10S-21E	43-047-30261	2900	FEDERAL	GW	P
NBU CIGE 13-7-10-21	07-10S-21E	43-047-30420	2900	FEDERAL	GW	P
NBU CIGE 94D-7-10-21J	07-10S-21E	43-047-31164	2900	FEDERAL	GW	P
CIGE 167-7-10-21	07-10S-21E	43-047-32142	2900	FEDERAL	GW	S
CIGE 182-7-10-21	07-10S-21E	43-047-32481	2900	FEDERAL	GW	P
CIGE 200-7	07-10S-21E	43-047-31139	2900	FEDERAL	GW	PA
NBU 13-8B	08-10S-21E	43-047-30294	2900	FEDERAL	GW	P
CIGE 7-8-10-21	08-10S-21E	43-047-30358	2900	FEDERAL	GW	P
NBU CIGE 75D-8-10-21P	08-10S-21E	43-047-30954	2900	FEDERAL	GW	P
NBU FEDERAL 205-8J	08-10S-21E	43-047-31238	2900	FEDERAL	GW	P
CIGE 102D-8-10-21	08-10S-21E	43-047-31741	2900	FEDERAL	GW	S
NBU 332-8E	08-10S-21E	43-047-32148	2900	FEDERAL	GW	S
CIGE 149-8-10-21	08-10S-21E	43-047-32056	2900	FEDERAL	GW	P
CIGE 207-8-10-21	08-10S-21E	43-047-32975	2900	FEDERAL	GW	P
CIGE 208-8-10-21	08-10S-21E	43-047-32995	2900	FEDERAL	GW	P
NBU 508-8E	08-10S-21E	43-047-33124	2900	FEDERAL	GW	P
CIGE 227-9-10-21	09-10S-21E	43-047-32998	2900	FEDERAL	GW	P
NBU 431-9E	09-10S-21E	43-047-33069	2900	FEDERAL	GW	S
CIGE 254	09-10S-21E	43-047-33723	2900	FEDERAL	GW	P
CIGE 150-9-10-21	09-10S-21E	43-047-32058	2900	FEDERAL	GW	P

**OPERATOR CHANGES DOCUMENTATION**

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 02/28/2003
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 03/04/2003
- The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 03/06/2003
- Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- If **NO**, the operator was contacted on: \_\_\_\_\_

6. (R649-9-2)Waste Management Plan has been received on: IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM-12/31/2003 BIA-12/5/02

8. **Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: 02/27/2003

9. **Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: N/A

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

**DATA ENTRY:**

1. Changes entered in the Oil and Gas Database on: 03/19/2003

2. Changes have been entered on the Monthly Operator Change Spread Sheet on: 03/19/2003

3. Bond information entered in RBDMS on: N/A

4. Fee wells attached to bond in RBDMS on: N/A

**STATE WELL(S) BOND VERIFICATION:**

1. State well(s) covered by Bond Number: RLB 0005236

**FEDERAL WELL(S) BOND VERIFICATION:**

1. Federal well(s) covered by Bond Number: 158626364

**INDIAN WELL(S) BOND VERIFICATION:**

1. Indian well(s) covered by Bond Number: RLB 0005239

**FEE WELL(S) BOND VERIFICATION:**

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB 0005238

2. The **FORMER** operator has requested a release of liability from their bond on: N/A

The Division sent response by letter on: N/A

**LEASE INTEREST OWNER NOTIFICATION:**

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: N/A

**COMMENTS:**

---

---

---

---

---

---

---

---

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
 WESTPORT OIL & GAS COMPANY, L.P.

3a. Address  
 P.O. BOX 1148 VERNAL, UT 84078

3b. Phone No. (include area code)  
 (435) 781-

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
 Multiple Wells - see attached

5. Lease Serial No.  
 Multiple Wells - see attached

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.  
 891008900A

8. Well Name and No.  
 Multiple Wells - see attached

9. API Well No.  
 Multiple Wells - see attached

10. Field and Pool, or Exploratory Area  
 Natural Buttes Unit

11. County or Parish, State  
 Uintah County, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

Westport Oil & Gas requests a variance to Onshore Order No. 4, Part IIIC.a. requiring each sales tank be equipped with a pressure-vacuum thief hatch and/or vent line valve. The variance is requested as an economic analysis shows the value of the shrunk condensate will not payout the incremental cost of purchasing and maintaining the valve resulting in a loss of value over the producing life of the well.

The volume lost to shrinkage by dropping the tank pressure from 6 ozs. to 0 psig is shown to be 0.3% of the tank volume. This was determined by lab analysis of a representative sample from the field. The sample shrunk from 98.82% of original volume to 98.52% when the pressure was dropped.

The average NBU well produces approximately 6 bbls condensate per month. The resulting shrinkage would amount to 0.56 bbls per month lost volume due to shrinkage. The value of the shrunk and lost condensate does not recoup or payout the cost of installing and maintaining the valves and other devices that hold the positive tank pressure. An economic run based on the loss and costs is attached.

Westport Oil & gas requests approval of this variance in order to increase the value of the well to the operator and the mineral royalty owners.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

J.T. Conley

Signature



COPY SENT TO OPERATOR

Date: 9-16-03

Initials: CHD

Title

Operations Manager

Date

9-2-2003

SEP 10 2003

DIV OF OIL GAS & MINING

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Accepted by the  
Utah Division of  
Oil, Gas and Mining

Date

Date: 9/16/03

Federal Approval of This  
Action Is Necessary

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**Westport Oil & Gas, L.P.**

**Project Economics Worksheet**

Instructions: Fill in blue areas with before and after project data. The evaluation results are shown below and graphed automatically at the bottom of the page. This sheet is protected to prevent accidental alteration of the formulas. See JTC for changes. OPX entered as annual costs and/or as unit OPX costs for \$/BF and \$/MCF

Project Name: **Condensate Shrinkage Economics**

Is this job a well pull or production rig job ??? **N** (Y or N)

	BEFORE \$/Year	AFTER \$/Year	DIFFERENCE \$/Year
Gross Oil Revenue	\$1,088	\$1,099	\$11
Gross Gas Revenue	\$0	\$0	\$0
NGL Revenue	\$0	\$0	\$0
PULLING UNIT SERVICE			\$0
WIRELINE SERVICE			\$0
SUBSURF EQUIP REPAIRS			\$0
COMPANY LABOR			\$0
CONTRACT LABOR	\$0	\$200	\$200
CONTR SERVICE			\$0
LEASE FUEL GAS	\$0	\$0	\$0
UTILITIES - ELECTRICITY	\$0	\$0	\$0
CHEMICAL TREATING			\$0
MATERIAL & SUPPLY	\$0	\$150	\$150
WATER & HAULING			\$0
ADMINISTRATIVE COSTS			\$0
GAS PLANT PROCESSING			\$0
<b>Totals</b>	<b>\$0</b>	<b>\$350</b>	<b>\$350</b>

**Increased OPX Per Year**

**Investment Breakdown:**

	Cap/Exp Code	Cost, \$
Capital \$	820/830/840	\$1,200
Expense \$	830/840	\$0
Total \$		\$1,200

Oil Price	\$ 23.00	\$/BO
Gas Price	\$ 3.10	\$/MCF
Electric Cost	\$ -	\$/ HP / day
OPX/BF	\$ 2.00	\$/BF
OPX/MCF	\$ 0.42	\$/MCF

**Production & OPX Detail:**

	Before	After	Difference
Oil Production	0.192 BOPD	0.194 BOPD	0.002 BOPD
Gas Production	0 MCFPD	0 MCFPD	0 MCFPD
Wtr Production	0 BWPD	0 BWPD	0 BWPD
Horse Power	0 HP	0 HP	0 HP
Fuel Gas Burned	0 MCFPD	0 MCFPD	0 MCFPD

**Project Life:**

Life = **20.0** Years  
(Life no longer than 20 years)

**Internal Rate of Return:**

After Tax IROR = **#DIV/0!**

**AT Cum Cashflow:**

Operating Cashflow = **(\$2,917)** (Discounted @ 10%)

**Payout Calculation:**

Payout =  $\frac{\text{Total Investment}}{\text{Sum(OPX + Incremental Revenue)}} = 1$

Payout occurs when total AT cashflow equals investment  
See graph below, note years when cashflow reaches zero

Payout = **NEVER** Years or **#VALUE!** Days


**Gross Reserves:**

Oil Reserves = 6 BO  
Gas Reserves = 0 MCF  
Gas Equiv Reserves = 38 MCFE

**Notes/Assumptions:**

**An average NBU well produces 0.192 bcpd with no tank pressure. The production is increased to 0.196 bcpd if 4 ozs of pressure are placed on the tank. The increased production does not payout the valve cost or the estimated annual maintenance costs.**

**Project: Condensate Shrinkage Economics**

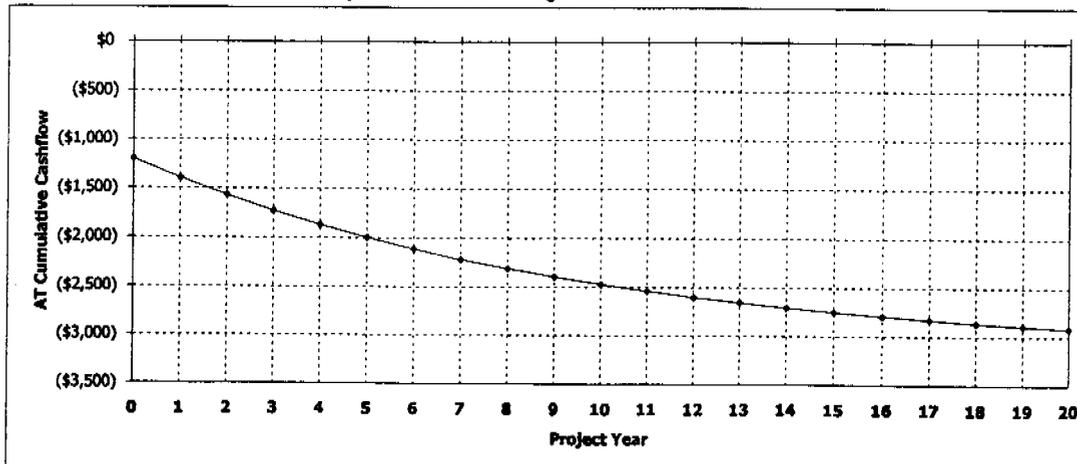

**Westport Oil and Gas, Inc.**

**NBU/Ouray Field**

RFL 2003-022

**COMPARISON OF FLASH BACK PRESSURES**

Calculated by Characterized Equation-of-State

Flash Conditions		Gas/Oil Ratio (scf/STbbl) (A)	Specific Gravity of Flashed Gas (Air=1.000)	Separator Volume Factor (B)	Separator Volume Percent (C)
psig	°F				

**Calculated at Laboratory Flash Conditions**

80	70			1.019	
0	122	30.4	0.993	1.033	101.37%
0	60	0.0	—	1.000	98.14%

**Calculated Flash with Backpressure using Tuned EOS**

80	70			1.015	
6.0 oz	65	24.6	0.777	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
4.0 oz	65	24.7	0.778	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
2.0 oz	65	24.7	0.779	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
0	65	24.8	0.780	1.003	98.82%
0	60	0.0	—	1.000	98.52%

(A) Cubic Feet of gas at 14.696 psia and 60 °F per Barrel of Stock Tank Oil at 60 °F.

(B) Barrels of oil at indicated pressure and temperature per Barrel of Stock Tank Oil at 60 °F.

(C) Oil volume at indicated pressure and temperature as a percentage of original saturated oil volume.

Note: Bubblepoint of sample in original sample container was 80 psig at 70° F with 1 cc water

CIGE 106D	32-9-22 SENW	ML22649	891008900A	43047317400S1	✓
CIGE 107D	1-10-21 NWNW	ML23612	891008900A	430473174700S1	✓
CIGE 108D	4-9-21 NESE	U01416	891008900A	430473175600S1	
CIGE 109D	33-9-21 SWNW	UTU01191A	891008900A	430473175400S1	
CIGE 110D	7-9-21 SWSE	UTU0575B	891008900A	430473195900S1	
CIGE 111D	13-9-21 SESW	U01193	891008900A	430473230500S1	
CIGE 112D	19-9-21 SESE	U0581	891008900A	430473194500S1	
CIGE 113	21-9-21 SWNE	UTU0576	891008900A	430473194400S1	
CIGE 114	34-9-21 NESE	U01194A	891008900A	430473191500S1	✓
CIGE 115	35-9-21 NWNE	ML22582	891008900A	430473191800S1	✓
CIGE 116	29-9-22 NWSW	ML22935	891008900A	430473191900S1	
CIGE 117	34-9-22 SWNW	UTU0149077	891008900A	430473192800S1	
CIGE 118	35-9-22 NESE	UTU010954A	891008900A	430473202500S1	
CIGE 119	15-10-21 NENE	UTU01416A	891008900A	430473192700S1	
CIGE 120	15-9-20 NENE	UTU0144868	891008900A	430473225100S1	
CIGE 121	15-9-20 SWNE	UTU0144868	891008900A	430473225200S1	
CIGE 122	7-9-21 NENE	UTU0149767	891008900A	430473209800S1	
CIGE 123	7-9-21 SWNE	UTU0575B	891008900A	430473204700S1	
CIGE 124	9-9-21 NWSE	UTU01188	891008900A	430473204500S1	
CIGE 125	13-9-21 NWNW	U01193	891008900A	430473208400S1	
CIGE 127	16-9-21 NESW	ML3141	891008900A	430473203600S1	
CIGE 129	18-9-21 NENW	UTU0581	891008900A	430473204300S1	
CIGE 130	19-9-21 NENE	U0581	891008900A	430473203000S1	
CIGE 131	19-9-21 SWNE	U0581	891008900A	430473202900S1	
CIGE 133	35-9-21 SWSE	ML22582	891008900A	430473197800S1	✓
CIGE 134D	1-10-20 SWSW	UTU02270A	891008900A	430473198900S1	
CIGE 135	3-10-21 SWSW	UTU0149078	891008900A	430473200100S1	
CIGE 136	4-10-21 SWNE	ML22940	891008900A	430473197900S1	
CIGE 137	6-10-21 SENE	UTU01791	891008900A	430473198800S1	
CIGE 138A	6-10-21 SENW	UTU01791	891008900A	430473204900S1	
CIGE 139	10-10-21 SWNE	UTU0149079	891008900A	430473198600S1	
CIGE 140	16-10-21 NENE	ML10755	891008900A	430473197700S1	
CIGE 141	7-10-22 NWNE	ML23609	891008900A	430473197000S1	
CIGE 142	25-9-21 SENE	U01189	891008900A	430473199400S1	✓
CIGE 143	34-9-21 SWNE	U01194A	891008900A	430473199500S1	✓
CIGE 144	2-10-22 SWNE	ML22651	891008900A	430473202200S1	
CIGE 145	29-9-22 SENW	ML22935	891008900A	430473199300S1	
CIGE 146	16-10-21 NWNE	ML10755	891008900A	430473202100S1	
CIGE 147	36-9-22 SESW	ML22650	891008900A	430473202000S1	✓
CIGE 148	31-9-22 NWNE	ML22935A	891008900A	430473202400S1	✓
CIGE 149	8-10-21 NWNE	UTU01791	891008900A	430473205600S1	
CIGE 150	9-10-21 SWNE	UTU01416	891008900A	430473205800S1	
CIGE 151	10-10-21 SWSE	UTU0149079	891008900A	430473205900S1	
CIGE 152	33-9-22 SESW	UTU01191A	891008900A	430473206800S1	
CIGE 153	35-9-22 SESW	UTU010954A	891008900A	430473206700S1	
CIGE 154	13-10-20 NWNW	UTU4485	891008900A	430473211900S1	
CIGE 155	9-9-21 SENE	UTU01188B	891008900A	430473215700S1	
CIGE 156	16-9-21 NESE	ML3282	891008900A	430473219500S1	
CIGE 157	16-9-21 SWNW	UTU38409	891008900A	430473216000S1	
CIGE 158	21-9-21 NESE	UTU0576	891008900A	430473215800S1	
CIGE 159	6-10-21 NWNE	UTU01791	891008900A	430473212000S1	
CIGE 160	14-10-21 SWSE	UTU01393C	891008900A	430473212400S1	
CIGE 161	2-10-22 SESE	ML22651	891008900A	430473216800S1	
CIGE 162	36-9-22 SESE	ML22650	891008900A	430473216400S1	✓
CIGE 163	15-9-21 SENE	UTU01193	891008900A	430473219200S1	
CIGE 164	34-9-22 NENW	UTU0149077	891008900A	430473235300S1	
CIGE 165	1-10-20 SWNW	UTU02270A	891008900A	430473211400S1	
CIGE 166	3-10-21 NENW	UTU0149078	891008900A	430473217200S1	
CIGE 167	7-10-21 NENE	UTU01791	891008900A	430473214200S1	
CIGE 168	16-10-21 NWSE	ML10755	891008900A	430473212300S1	
CIGE 170	14-9-21 SWNW	UTU01193	891008900A	430473240300S1	
CIGE 171	15-9-21 SWSE	UTU010950A	891008900A	430473234800S1	

Division of Oil, Gas and Mining  
**OPERATOR CHANGE WORKSHEET**

<b>ROUTING</b>
1. DJJ
2. CDW

**X Change of Operator (Well Sold)**

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective: **1/6/2006**

<b>FROM:</b> (Old Operator): N2115-Westport Oil & Gas Co., LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024	<b>TO:</b> ( New Operator): N2995-Kerr-McGee Oil & Gas Onshore, LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024
---	--

<b>CA No.</b>		<b>Unit:</b>		<b>NATURAL BUTTES UNIT</b>				
<b>WELL NAME</b>	<b>SEC</b>	<b>TWN</b>	<b>RNG</b>	<b>API NO</b>	<b>ENTITY NO</b>	<b>LEASE TYPE</b>	<b>WELL TYPE</b>	<b>WELL STATUS</b>

**OPERATOR CHANGES DOCUMENTATION**

Enter date after each listed item is completed

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
3. The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- 4a. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- 4b. If **NO**, the operator was contacted on:
- 5a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- 5b. Inspections of LA PA state/fee well sites complete on: n/a 3 LA wells & all PA wells transferred
- 5c. Reports current for Production/Disposition & Sundries on: ok
6. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet
7. **Federal and Indian Units:**  
The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006
8. **Federal and Indian Communization Agreements ("CA"):**  
The BLM or BIA has approved the operator for all wells listed within a CA on: n/a
9. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on:

**DATA ENTRY:**

1. Changes entered in the **Oil and Gas Database** on: 5/15/2006
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
3. Bond information entered in RBDMS on: 5/15/2006
4. Fee/State wells attached to bond in RBDMS on: 5/16/2006
5. Injection Projects to new operator in RBDMS on: \_\_\_\_\_
6. Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

**BOND VERIFICATION:**

1. Federal well(s) covered by Bond Number: CO1203
2. Indian well(s) covered by Bond Number: RLB0005239
3. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- a. The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG  
The Division sent response by letter on: \_\_\_\_\_

**LEASE INTEREST OWNER NOTIFICATION:**

4. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

**COMMENTS:**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

5. Lease Serial No.

**MULTIPLE LEASES**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

**MUTIPLE WELLS**

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State

UINTAH COUNTY, UTAH

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well

Oil Well  Gas Well  Other

2. Name of Operator

**KERR-McGEE OIL & GAS ONSHORE LP**

3a. Address

**1368 SOUTH 1200 EAST VERNAL, UT 84078**

3b. Phone No. (include area code)

**(435) 781-7024**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

**SEE ATTACHED**

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006. KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

RECEIVED

MAY 10 2006

DIV. OF OIL, GAS & MINING

BLM BOND = C01203  
BIA BOND = RLB0005239

APPROVED 5116106

*Earlene Russell*

Division of Oil, Gas and Mining  
Earlene Russell, Engineering Technician

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

**RANDY BAYNE**

Title

**DRILLING MANAGER**

Signature

Date

**May 9, 2006**

**THIS SPACE FOR FEDERAL OR STATE USE**

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

**SUBMIT IN TRIPLICATE - Other Instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
**WESTPORT OIL & GAS COMPANY L.P.**

3a. Address  
**1368 SOUTH 1200 EAST VERNAL, UT 84078**

3b. Phone No. (include area code)  
**(435) 781-7024**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**SEE ATTACHED**

5. Lease Serial No.  
**MULTIPLE LEASES**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.  
**MUTIPLE WELLS**

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State  
**UINTAH COUNTY, UTAH**

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

**APPROVED** 5/16/06  
*Earlene Russell*  
 Division of Oil, Gas and Mining  
 Earlene Russell, Engineering Technician

RECEIVED  
 MAY 10 2006

DIV OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) <b>BRAD LANEY</b>	Title <b>ENGINEERING SPECIALIST</b>
Signature	Date <b>May 9, 2006</b>

**THIS SPACE FOR FEDERAL OR STATE USE**

Approved by <i>Brad Laney</i>	Title	Date <b>5-9-06</b>
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		
Office		

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



## United States Department of the Interior

BUREAU OF LAND MANAGEMENT  
Colorado State Office  
2850 Youngfield Street  
Lakewood, Colorado 80215-7076

IN REPLY REFER TO:

CO922 (MM)  
3106  
COC017387 et. al.

March 23, 2006

### NOTICE

Kerr-McGee Oil & Gas Onshore L.P. :  
1999 Broadway, Suite 3700 : Oil & Gas  
Denver, CO 80202 :

#### Merger/Name Change - Recognized

On February 28, 2006 this office received acceptable evidence of the following mergers and name conversion:

Kerr-McGee Oil & Gas Onshore L.P., a Delaware Limited Partnership, and Kerr-McGee Oil & Gas Onshore LLC, a Delaware Limited Partnership merger with and into Westport Oil and Gas Company L.P., a Delaware Limited Partnership, and subsequent Westport Oil & Gas Company L.P. name conversion to Kerr-McGee Oil & Gas Onshore L.P.

For our purposes the merger and name conversion was effective January 4, 2006, the date the Secretary of State of Delaware authenticated the mergers and name conversion.

Kerr-McGee Oil & Gas Onshore L.P. provided a list of oil and gas leases held by the merging parties with the request that the Bureau of Land Management change all their lease records from the named entities to the new entity, Kerr-McGee Oil & Gas Onshore L.P. In response to this request each state is asked to retrieve their own list of leases in the names of these entities from the Bureau of Land Management's (BLM) automated LR2000 data base.

The oil and gas lease files identified on the list provided by Kerr-McGee Oil & Gas Onshore L.P. have been updated as to the merger and name conversion. We have not abstracted the lease files to determine if the entities affected by the acceptance of these documents holds an interest in the lease, nor have we attempt to identify leases where the entity is the operator on the ground that maintains vested record title or operating rights interests. If additional documentation, for change of operator, is required you will be contacted directly by the appropriate Field Office. The Mineral Management Services (MMS) and other applicable BLM offices were notified of the merger with a copy of this notice

Please contact this office if you identify additional leases where the merging party maintains an interest, under our jurisdiction, and we will document the case files with a copy of this notice. If the leases are under the jurisdiction of another State Office that information will be forwarded to them for their action.

Three riders accompanied the merger/name conversion documents which will add Kerr-McGee Oil and Gas Onshore LLC as a principal to the 3 Kerr-McGee bonds maintained by the Wyoming State Office. These riders will be forward to them for their acceptance.

The Nationwide Oil & Gas Continental Casualty Company Bond #158626364 (BLM Bond #CO1203), maintained by the Colorado State Office, will remain in full force and effect until an assumption rider is accepted by the Wyoming State Office that conditions their Nationwide Safeco bond to accept all outstanding liability on the oil and gas leases attached to the Colorado bond.

If you have questions about this action you may call me at 303.239.3768.

/s/Martha L. Maxwell  
Martha L. Maxwell  
Land Law Examiner  
Fluid Minerals Adjudication

**Attachment:**

List of OG Leases to each of the following offices:

MMS MRM, MS 357B-1

WY, UT, NM/OK/TX, MT/ND, WY State Offices

CO Field Offices

Wyoming State Office

Rider #1 to Bond WY2357

Rider #2 to Bond WY1865

Rider #3 to Bond WY1127



# United States Department of the Interior



BUREAU OF LAND MANAGEMENT  
Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155  
<http://www.blm.gov>

IN REPLY REFER TO:  
3106  
(UT-922)

March 27, 2006

## Memorandum

To: Vernal Field Office

From: Chief, Branch of Fluid Minerals

Subject: Merger Approval

Attached is an approved copy of the merger recognized by the Bureau of Land Management, Colorado State Office. We have updated our records to reflect the merger from Westport Oil and Gas Company L.P. into Kerr-McGee Onshore Oil and Gas Company. The merger was approved effective January 4, 2006.

Chief, Branch of  
Fluid Minerals

## Enclosure

Approval letter from BLM COSO (2 pp)

cc: MMS, Reference Data Branch, James Sykes, PO Box 25165, Denver CO 80225  
State of Utah, DOGM, Attn: Earlene Russell, PO Box 145801, SLC UT 84114  
Teresa Thompson  
Joe Incardine  
Connie Seare  
Dave Mascarenas  
Susan Bauman

RECEIVED

MAR 28 2006

BLM OF OIL, GAS & MINERALS

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU-01416
---	--

<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b> NATURAL BUTTES
--	--

<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> CIGE 150
------------------------------------	---

<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	<b>9. API NUMBER:</b> 43047320580000
---	---

<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6007 Ext	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES
---	--	--

<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 2093 FNL 1724 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SWNE Section: 09 Township: 10.0S Range: 21.0E Meridian: S	<b>COUNTY:</b> Uintah  <b>STATE:</b> Utah
---	---

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 9/10/2010  <input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:  <input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:  <input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input checked="" type="checkbox"/> <b>PLUG AND ABANDON</b> <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 50px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.  
 The operator requests to plug and abandon the subject well location. Attached is the the plug and abandonment procedure. Thank you.

**Accepted by the  
 Utah Division of  
 Oil, Gas and Mining**  
  
**Date:** September 09, 2010  
**By:** *Danielle Piernot*

<b>NAME (PLEASE PRINT)</b> Danielle Piernot	<b>PHONE NUMBER</b> 720 929-6156	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A	<b>DATE</b> 9/7/2010	

CIGE 150  
 2063' FNL & 1724' FWL  
 SWNE SEC.9, T10S, R21E  
 Uintah County, UT

KBE: 5072' API NUMBER: 4304732058  
 GLE: 5060' LEASE NUMBER: UTU-01416  
 TD: 5850' WI: 100.000000%  
 PBTD: 5806' (FC) NRI: 83.494445%  
 5845' (SHOE) WINS#: 72792

CASING: 12.25" hole  
 • 8.625", 24#, K-55 @ 267' w/150 sx Class A cement w/ 2% CaCl<sub>2</sub> and ¼#/sx Flocele (15.6 ppg, 1.18 cuft/sx yield) out casing shoe.  
 Cement returns of 8bbl.

7.875" hole  
 5.5", 17#, J-55 LT&C @ 5858'  
 Cement w/340 sx Hi-Fill w/1#/sk Capseal + 3% HR-7, tail w/ 440 sx 50-50 Poz + 2% gel +10% salt + .6% Hal 24 + .3% CFR-3 + ¼#/sk Floseal + 1#/sk Capseal. No returns. TOC @ 1700' by CBL.

4/2/1992-Cemented 8-5/8" x 5-1/2" csg annulus w/20 bbl LCM pill, 55 sx Class "G" + 2% CaCl<sub>2</sub> + .7% CF-2 + 3 #/sk Hi-Seal 3 + 1/4 #/sk Cello Seal & 200 sx Class "G" + 3% CaCl<sub>2</sub> + .7% CF-2.

TUBING: 2.375" 4.7# J-55 landed at 5509'

Tubular/Borehole	Drift inches	Collapse psi	Burst psi	Capacities		
				Gal./ft.	Cuft./ft.	Bbl./ft.
2.375" 4.7# J-55 tbg.	1.901	8100	7700	0.1624	0.02173	0.0039
5.5" 17# J-55	4.892	4910	5320	0.9764	0.1305	0.02324
8.625" 24# J-55	7.972	1370	3930	2.6749	0.3537	0.0636
<b>Annular Capacities</b>						
2.375" tbg. X 5 ½" 18# csg				0.7013	0.0937	0.0167
5.5" csg X 8 5/8" 24# csg				1.296	0.1733	0.0309
5.5" csg X 7.875 borehole				1.4407	0.1926	0.0343
8.625" csg X 12 1/4" borehole				3.0874	0.4127	0.0735

**GEOLOGIC INFORMATION:**

Formation	Depth to top, ft.	Tech Pub. #92 Base of USDW's
Uinta	Surface	USDW Elevation ~5060 MSL
Green River	1286'	USDDW Depth ~12' KBE
Birds Nest	1454'	
Mahogany	2034'	
Base of Parachute	2876'	
Wasatch	4549'	

## PERFORATIONS

Formation	Date	Top	Bottom	SPF	Status
Wasatch	7/16/1992	4933		4	Open
Wasatch	7/16/1992	5002		4	Open
Wasatch	7/16/1992	5005		4	Open
Wasatch	7/16/1992	5010		4	Open
Wasatch	7/16/1992	5019		4	Open
Wasatch	7/16/1992	5025		4	Open
Wasatch	7/16/1992	5154		4	Open
Wasatch	7/16/1992	5158		4	Open
Wasatch	7/16/1992	5200		4	Open
Wasatch	7/16/1992	5493		4	Open

## WELL HISTORY

### Completion – Nov 1991

- Ran CBL with cement top at 1700'. Perforated the gross Wasatch with 10 shots between 4993 to 5493'. Flow tested well.

### Completion – Jul 1992

- Frac well w/70,250 gal gelled 3% KCl wtr w/30% CO<sub>2</sub> & 126,500# 20/40 sand.
- Perforated the gross Mesa Verde interval 7754' through 7867' and fractured with 1830 bbl gel containing 250140# 20/40 mesh sand.
- Flwg 2.0 MMCFD, FTP 950 psi, CP 900 psi on 18/64" chk, 20 BWPD. Gas will burn

### Workover #1 – Dec 1995

- Perf to intervals 4993'-5493', 4 spf w/4" csg gun.
- Finish RIH & broach prod tbg - 176 jts landed @ 5509' w/notched collar on btm. SN 1 jt up & 10' blast jt on top.
- Installed PLE.

## CIGE 150 PLUG & ABANDONMENT PROCEDURE

### GENERAL

- H2S MAY BE PRESENT. CHECK FOR H2S AND TAKE APPROPRIATE PRECAUTIONS.
- CEMENT QUANTITIES BELOW ASSUME NEAT CLASS G, YIELD 1.145 CUFT./SX. IF A DIFFERENT PRODUCT IS USED, WELLSITE PERSONNEL ARE RESPONSIBLE FOR CORRECTING QUANTITIES TO YIELD THE STATED SLURRY VOLUME. WHEN SQUEEZING, INCLUDE 10% EXCESS PER 1000' OF DEPTH.
- TREATED FRESH WATER WILL BE PLACED BETWEEN ALL PLUGS INSTEAD OF BRINE.
- ALL DISPLACEMENT FLUID SHALL CONTAIN CORROSION INHIBITOR AND BIOCIDES. PREMIX 5 GALLONS PER 100 BBL FLUID.
- NOTIFY BLM 24 HOURS BEFORE MOVING ON LOCATION.


### PROCEDURE

**Note: An estimated 192 sx Class "G" cement needed for procedure**

**Note: No gyro has been ran on well**

1. MIRU. KILL WELL AS NEEDED. ND WH, NU AND TEST BOPE.
2. PULL TBG & LD SAME. RU WIRELINE AND MAKE A GAUGE RING RUN TO CHECK FOR FILL.
3. **PLUG #1, ISOLATE WASATCH PERFORATIONS (4933' - 5493') & PROTECT WASATCH TOP (4760')**: RIH W/ 5 1/2" CIBP. SET @ ~4880'. RELEASE CIBP, PUH 10', BRK CIRC W/ FRESH WATER. DISPLACE A MINIMUM OF **6 SX / 1.1 BBL / 6.53 CUFT**. ON TOP OF PLUG. PUH ABOVE TOC (~4830'). REVERSE CIRCULATE W/ TREATED BRINE.
4. **PLUG #2, PROTECT BASE OF PARACHUTE (~2876')**: PUH TO ~2980'. BRK CIRC W/ FRESH WATER. DISPLACE **23 SX / 4.8 BBL / 26.76 CUFT** AND BALANCE PLUG W/ TOC @ ~2775' (205' COVERAGE). PUH ABOVE TOC. REVERSE CIRCULATE W/ TREATED BRINE.
5. **PLUG #3, PROTECT TOP OF MAHOGANY (~2034')**: PUH TO ~2135'. BRK CIRC W/ FRESH WATER. DISPLACE **23 SX / 4.8 BBL / 26.76 CUFT** AND BALANCE PLUG W/ TOC @ ~1930' (205' COVERAGE). PUH ABOVE TOC. REVERSE CIRCULATE W/ TREATED BRINE.
6. **PLUG #4, PROTECT TOP OF BIRD'S NEST (~1454') & TOP OF GREEN RIVER (1286')** POOH W/ TBG. RIH W/ WIRELINE, PERFORATE @ ~1555' W/ 4 SPF. PU & RIH W/ 5 1/2" CICR, SET @ ~1185'. RIH W/ TBG & STING INTO CICR & SQUEEZE PERFS W/ APPROXIMATELY **46 SX / 9.5 BBL / 53.12 CUFT** (CALCULATION INCLUDES 10% EXCESS) OR SUFFICIENT VOLUME TO FILL CSG & BOREHOLE ANNULUS TO 1380'. STING OUT OF CICR AND SPOT **6 SX / 1.1 BBL / 6.53 CUFT** CMT ON TOP OF CICR. BRK CIRC W/ FRESH WATER. POOH ABOVE TOC (~1330'). REVERSE CIRCULATE W/ 10 PPG BRINE.
7. **PLUG #6, SURFACE SHOE (~264' KB) & BASE OF USDW (~12' KB) & SURFACE HOLE**: POOH W/ TBG. RIH W/ WIRELINE, PERFORATE @ 314' W/ 4 SPF. POOH W/ WIRELINE. RU CEMENT SERVICE TO PROD CSG. PUMP **88 SX / 18.03 BBL / 101.25 CUFT** OR SUFFICIENT VOLUME TO FILL ANNULUS AND CASING TO SURFACE.
8. CUT OFF WELLHEAD AND INSTALL MARKER PER BLM GUIDELINES.
9. RDMO. TURN OVER TO OPERATIONS FOR SURFACE REHAB.

ALM 9/2/10

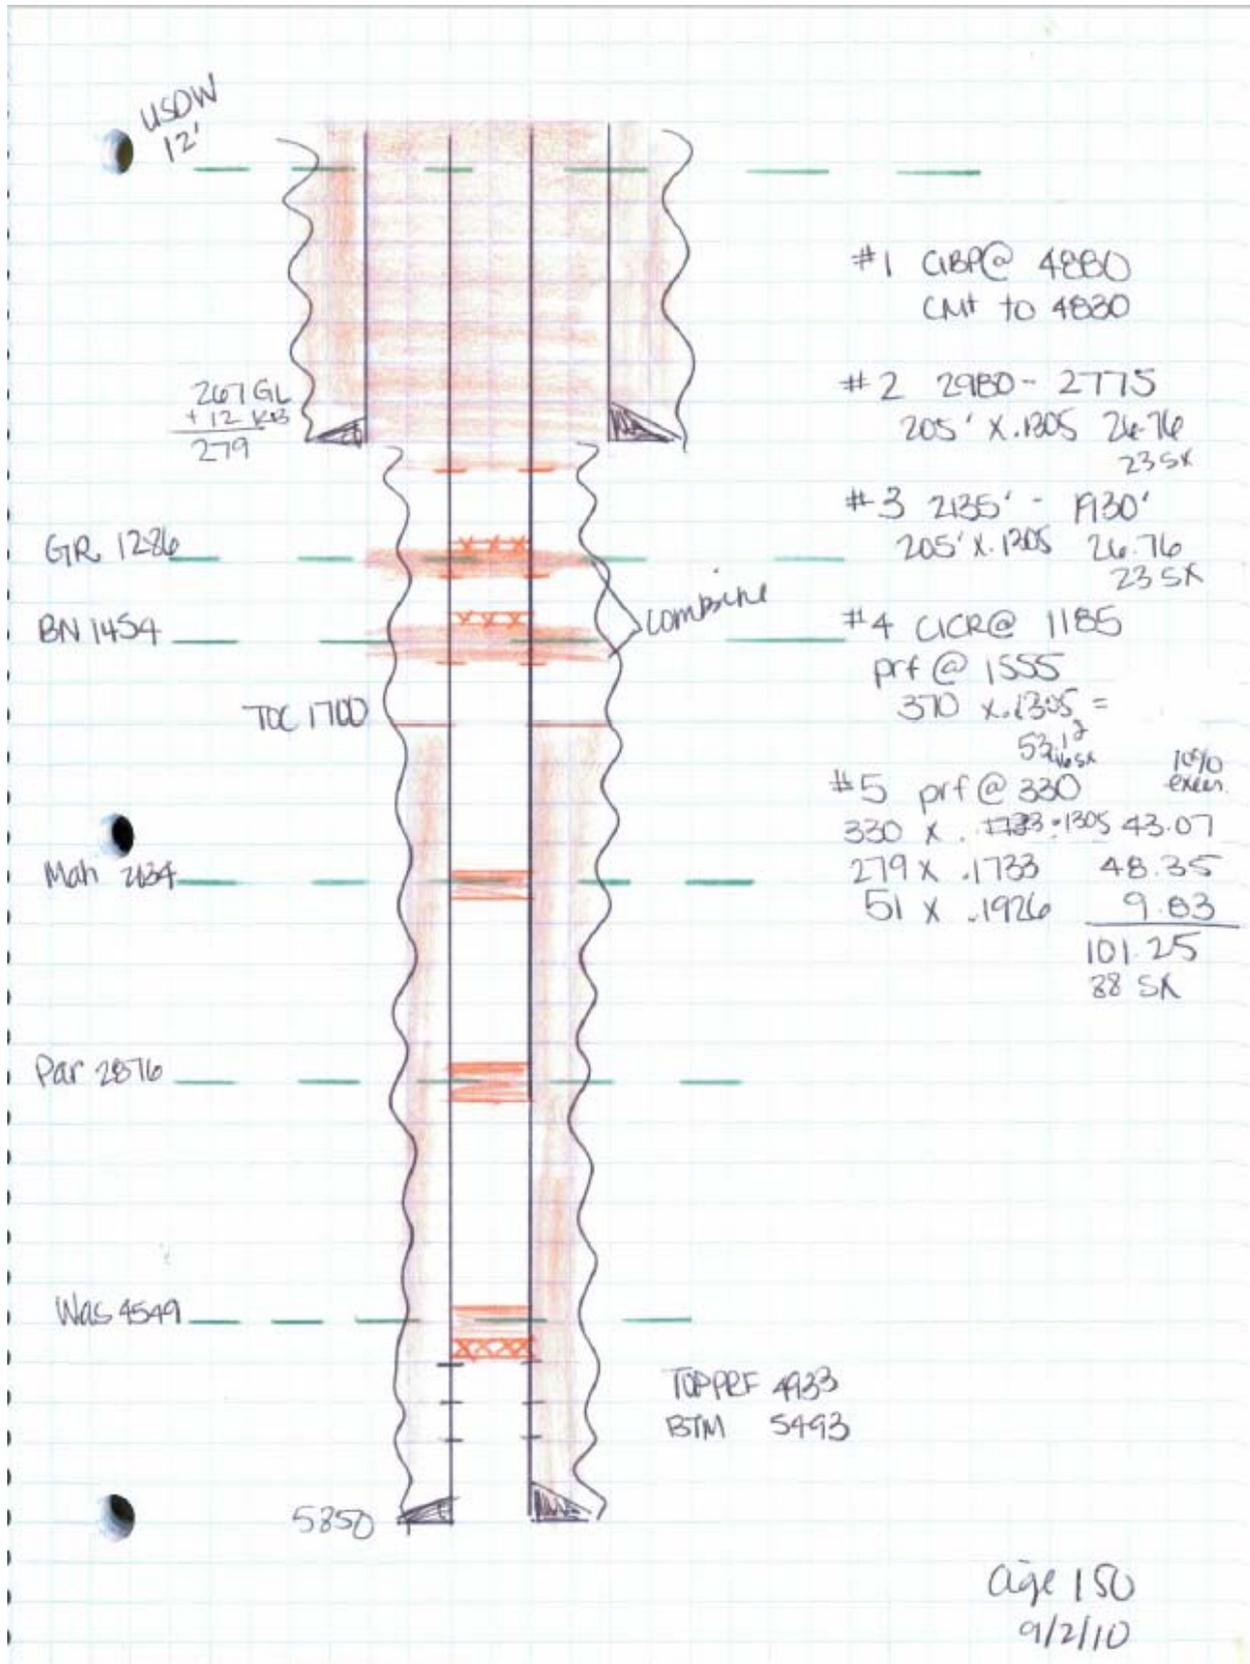

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB NO. 1004-0135  
Expires: July 31, 2010

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
UTU01416

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

**SUBMIT IN TRIPLICATE - Other instructions on reverse side.**

1. Type of Well  
 Oil Well  Gas Well  Other

8. Well Name and No.  
CIGE 150

2. Name of Operator  
KERR-MCGEE OIL&GAS ONSHORE, LP  
Contact: ANDY LYTLE  
E-Mail: andrew.lytle@anadarko.com

9. API Well No.  
43-047-32058

3a. Address  
P.O. BOX 173779  
DENVER, CO 80217

3b. Phone No. (include area code)  
Ph: 720-929-6100

10. Field and Pool, or Exploratory  
NATURAL BUTTES

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
Sec 9 T10S R21E SWNE 2093FNL 1724FEL

11. County or Parish, and State  
UINTAH COUNTY, UT

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input checked="" type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

THE OPERATOR SUBMITTED A NOTICE OF INTENT SUNDRY REQUESTING BLM APPROVAL TO PLUG AND ABANDON THE SUBJECT WELL LOCATION ON 9/7/2010. THE PLUG AND ABANDONMENT NOTICE OF INTENT WAS BLM APPROVED ON 10/14/2010. PLUG AND ABANDONMENT OPERATIONS HAVE NOT OCCURED YET.

THE OPERATOR REQUESTS AUTHORIZATION TO RECLAIM THE SUBJECT WELL LOCATION AT THE CONCLUSION OF PLUGGING OPERATIONS. A PLAN ATTACHED TO THIS SUNDRY NOTICE IS THE FINAL RECLAMATION PLAN.

Utah Division of  
Oil, Gas and Mining  
Date: 12/11/2010  
By: *[Signature]*

Federal Approval Of This  
Action Is Necessary

**COPY SENT TO OPERATOR**  
Date: 12.2.2010  
Initials: KS

14. I hereby certify that the foregoing is true and correct.  
**Electronic Submission #98006 verified by the BLM Well Information System For KERR-MCGEE OIL&GAS ONSHORE, LP, sent to the Vernal**

Name (Printed/Typed) ANDY LYTLE	Title REGULATORY ANALYST
Signature (Electronic Submission)	Date 11/23/2010

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved By _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		
Office _____		

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**\*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED** **RECEIVED**  
NOV 29 2010

# **CIGE 150 Final Reclamation Plan**

*Prepared by:*  
**Anadarko Petroleum Corporation**  
*June 2010*



## **Introduction**

The CIGE 150 (API # 43-047-32058) is a conventional natural gas well located in Uintah County, UT approximately 10 miles southeast of the town of Ouray, UT. The location is in section 9 of township 10S range 21E.

## **Final Reclamation Objectives**

After production and operations cease, the goal of final reclamation is to return the land to a condition that approximates that which existed prior to disturbance and maintain a stable and productive condition compatible with the land use. The goal is not to achieve full ecological restoration of the site, but to achieve short-term stability, visual, hydrological and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

## **Site Preparation and Revegetation**

Earthwork for final reclamation will be completed within six months of well plugging, if weather allows for such activities to take place. Disturbed areas will be revegetated after the site has been prepared. Site preparation will include respreading topsoil to an adequate depth and may also include ripping, tilling, disking on contour, dozer track-imprinting, and/or other accepted reclamation site preparation practices. Activities such as seeding and vegetation re-establishment must be completed within the appropriate season for such activities not necessarily immediately after earthwork has been completed. Fall seeding can be conducted after August 15 until ground frost. The long term objective of final reclamation is for eventual ecosystem restoration including the restoration of the natural vegetative community, hydrology and wildlife habitats. Following well plugging, well sites that do not blend with the surrounding landform will be re-contoured.

## **Well Site Reclamation**

Following well plugging, all surface equipment will be removed. The CIGE 150 will be re-contoured to blend with the surrounding landform and topography. Topsoil will be stripped before re-contouring and re-spread over the entire location.

## **Road Reclamation**

All roads within the project area will be reclaimed unless the surface management agency or surface owner requests that they be left unreclaimed. Road reclamation will include recontouring and seeding and may also include ripping, scarifying or disking. The CIGE 150 has approximately 500ft of access road to be reclaimed.

## **Reclamation of Other Associated Facilities**

There are no other associated facilities with this well requiring reclamation.

## **Soil Preparation**

Soil preparation will be conducted using a disk for areas in need of more soil preparation following site preparation. This will provide primary soil tillage to a depth no greater than 6 inches. Prior to reseeding, compacted areas will be scarified by ripping or chiseling to loosen compacted soils. Scarification will promote water infiltration; improve soil aeration and root penetration.

## **Seed Mix and Seeding**

Common Name	PLS LBS/Acre
Indian Ricegrass	3
Sandberg bluegrass	0.75
Bottlebrush squirreltail	0.5
Great Basin Wildrye	0.5
Western wheatgrass	1.5
Winterfat	0.25
Shadscale	1.5
Four-wing saltbush	0.75
Scarlet Globemallow	0.5
Rocky Mtn. Bee Plant	.75
Forage Kochia	0.25
	9.75

The CIGE 150 will be seeded with a no-till rangeland style seed drill with a "picker box" in order to seed "fluffy" seed. In areas that drill seeding may not be the preferred method, the seed will be broadcast and then raked into the ground at double the rate of drill seeding. All seed will be certified and tags will be kept on hand by Anadarko Petroleum Corporation, all seed will be certified weed free.

## **Soil Amendments and Stabilization**

Additional soil amendments and stabilization may be required on sites with poor soils and greater erosion potential. The following soil amendments may be used on this location:

Sustane is an organic fertilizer that will be applied at the rate 1,800 – 2,100 lbs/acre with seed. Sustane granulated slow release fertilizers replenish the soil with essential nutrients and a rich supply of humus as required for long term soil building and plant growth. Sustane can be dry broadcast or applied with hydro-seeding equipment.

### **Erosion Control**

The slopes will be stabilized using materials specifically designed to prevent erosion in order to allow permanent establishment of vegetation. These materials will include, but are not limited to erosion control blankets, hydro-mulch, or soil amendments such as erosion control polymers

### **Monitoring**

Monitoring of the CIGE 150 will be completed annually during the growing season and actions to ensure reclamation success will be taken as needed. During the first 2 growing seasons an ocular methodology will be used to determine the success of the reclamation activities. During the 3rd growing season a quantitative method of 200 point line intercept basal monitoring will be conducted in order to see if the reclaimed area has met 30% desirable basal cover when compared to the native vegetation. If 30% has not been met additional seeding/reclamation efforts may be necessary (Green River District Reclamation Guidelines). Monitoring will continue until the reclaimed area reaches 75% basal cover of desirable vegetation when compared to the undisturbed adjacent native vegetation.

All monitoring reports will be submitted to the Vernal BLM no later than March 31 of the year following the data collection. (Data collected in 2010 will be submitted in 2011 and so forth.) These reports will be submitted electronically in the form of a geodatabase for use in a geographic information system (GIS).

### **Noxious Weeds**

Noxious weeds will be controlled as needed on the location. Monitoring and management of noxious and/or invasive weeds of concern will be completed annually until the project is deemed successfully reclaimed by the surface management agency and/or owner according to the Anadarko Integrated Weed Management Plan. Noxious weed infestations will be mapped using a GPS unit

and submitted to the BLM with information required in the Vernal BLM Surface Disturbance Weed Policy. If herbicide is to be applied it will be done according to an approved Pesticide Use Permit (PUP). Anadarko submits a field wide PUP annually, and this location will fall under the PUP. All pesticide applications will be recorded using a Pesticide Application Record (PAR) and will be submitted along with a Pesticide Use Report (PUR) annually prior to Dec. 31. All weed management will be done in accordance with the Vernal BLM Surface Disturbance Weed Policy.

### **Inspection and Final Abandonment Approval**

When the CIGE 150 has reached the final abandonment objectives, the operator will file a Final Abandonment Notice (FAN). Upon receipt of the FAN a site inspection will be completed by the management agency to ensure reclamation is fully successful and approve the FAN. The operator may request termination of the bond on the Final Abandonment Notice.

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU-01416
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b> NATURAL BUTTES
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> CIGE 150
<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	<b>9. API NUMBER:</b> 43047320580000
<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6007 Ext
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 2093 FNL 1724 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SWNE Section: 09 Township: 10.0S Range: 21.0E Meridian: S	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES  <b>COUNTY:</b> UINTAH  <b>STATE:</b> UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input checked="" type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion: 12/7/2010	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input checked="" type="checkbox"/> <b>PLUG AND ABANDON</b>	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The operator has concluded the plug and abandonment operations on the subject well. This well was plugged and abandoned on 12/7/2010. Please see attached chronological well history for details. GPS Coordinates: Lat: 39.9642298 Long: -109.5537169

**Accepted by the**  
**Utah Division of**  
**Oil, Gas and Mining**  
**FOR RECORD ONLY**

<b>NAME (PLEASE PRINT)</b> Andy Lytle	<b>PHONE NUMBER</b> 720 929-6100	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A		<b>DATE</b> 12/15/2010

**US ROCKIES REGION  
Operation Summary Report**

Well: CIGE 150 Spud Date:  
 Project: UTAH-UINTAH Site: CIGE 150 Rig Name No: WESTERN WELLSITE/UNK  
 Event: ABANDONMENT Start Date: 12/3/2010 End Date: 12/7/2010  
 Active Datum: RKB @0.00ft (above Mean Sea Level) UWI: CIGE 150

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (ft)	Operation
12/3/2010	7:00 - 17:00	10.00	ABAND	47	A			HSM JSA. ROAD TO LOCATION MOVE RIG TO CIGE 150 RIG UP NO PRESURE ON WELL ND WH NU BOPE PULL TUBING HANGER OUT RIG UP SCAN TECH PIPE INSPECTION TOH / INSPEC 176 JOINS LAID DOWN SN PU 4.3/4 BIT TO 4832' TOH / TUBING LAID DOWNM BIT PU 5.1/2 CICR TIH / TUBING SET TOOL AT 4882' SWI SDFN TOTAL GOOD JOINTS 161 YELOW BAD JOINTS 15 RED
12/6/2010	7:00 - 17:00	10.00	ABAND	31	I			HSM JSA. ROAD TO LOCATION MOVE RIG PRESURE TEST CASING DON'T TEST PUMP 3/4 BPM PUMP 10 SXS ON TOP CIBP REVERSE CIRCULATION BLM WANT FIND HOLE ON CASING TOH / TUBING PU 5.1/2 PACKER TIH / TUBING FIND HOLE AT 2710' TOH / TUBING LAID DOWN PACKER TIH / TUBING TO 2973' PUMP 45 SXS 2% CC TOH / TUBING TO 1700' REVERSE CIRCULATION WOC SWI SDFN
12/7/2010	7:00 - 17:00	10.00	ABAND	51	D			HSM JSA. ROAD TO LOCATION TIH / TUBING TAG CEMENT AT 2667' PRESURE TEST CASING AT 800 PSI TEST GOOD TOH / TUBING TO 2128' PUMP 26 SXS TOC 1905' TOH / TUBING RIG UP WIRE LINE SHOT 4 HOLES AT 1486' TOH / WL STABLISH INJECTION RATE PU 5.1/2 CICR TIH / TUBING SET TOOL AT 1439' PUMP 62 SXS INTO SPOT 23 SXS ON TOP TOC 1234' TOH / TUBING RIG UP WIRE LINE SHOT 4 HOLES AT 314' TOH / WL STABLISH INJECTION RATE PUMP 124 SXS GOOD CEMENT TO SURFACE RIG DOWN DIG AND CUT WELL HEAD WOC Coordinates: X 0623521 and Y 4424789  X: 0623521  Y: 4424789