

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK  
 DRILL       DEEPEN       PLUG BACK

b. TYPE OF WELL  
 OIL WELL       GAS WELL       OTHER       SINGLE ZONE       MULTIPLE ZONE

2. NAME OF OPERATOR  
 Coastal Oil & Gas Corporation

3. ADDRESS OF OPERATOR  
 P. O. Box 749      Denver, CO 80201-0749      (303) 573-4476

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)\*  
 At surface      1136' FEL & 1534' FNE SENE  
 At proposed prod. zone      Same as above.

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE\*  
 Approximately 19 miles SE of Ouray, Utah.

15. DISTANCE FROM PROPOSED\* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any)      1136'

16. NO. OF ACRES IN LEASE TO THIS WELL  
 OIL GAS & MINING      551.44

18. DISTANCE FROM PROPOSED LOCATION\* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT.      1000'

19. PROPOSED DEPTH  
 6225' WSTC

20. ROTARY OR CABLE TOOLS  
 Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)  
 4942' Ungraded Ground

22. APPROX. DATE WORK WILL START\*  
 4/1/92

5. LEASE DESIGNATION AND SERIAL NO.  
 U-463

6. IF INDIAN, ALLOTTED OR TRIBE NAME  
 N/A

7. UNIT AGREEMENT NAME  
 Natural Buttes Unit

8. FARM OR LEASE NAME  
 NBU

9. WELL NO.  
 186

10. FIELD AND POOL, OR WILDCAT  
 Natural Buttes 630

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
 Section 30, T9S-R22E

12. COUNTY OR PARISH      13. STATE  
 Uintah County      Utah

MAR 09 1992

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12-1/4"	8-5/8"	24#	250'	180 sx circulated to surface*
7-7/8"	5-1/2"	17#	6225'	1000 sx circulated to surface*

\* Cement volumes may change due to hole size. Calculate from caliper log.

See Eight Point Resource Protection Plan Attached

I hereby certify that Coastal Oil & Gas Corp. is authorized by the proper lease interest owners to conduct lease operations associated with this Application for Permit to Drill the NBU #186, Federal Lease #U-463. Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by Coastal Oil & Gas Corp, Nationwide Oil & Gas Bond #CO-0018, who will be responsible for compliance with all the terms and conditions of that portion of the lease associated with this application.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED Eileen Danni Dey TITLE Regulatory Analyst DATE 3/2/92

(This space for Federal or State office use)

PERMIT NO. 43-047-30233 APPROVAL DATE \_\_\_\_\_

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE: 4-27-92

CONDITIONS OF APPROVAL, IF ANY: \_\_\_\_\_ BY: [Signature]

WELL SPACING: 649-2-3


APPROVED BY THE STATE  
OF UTAH DIVISION OF  
OIL, GAS, AND MINING

\*See Instructions On Reverse Side

# COASTAL OIL & GAS CORP.


Well location, NBU #186, located as shown in the SE 1/4 NE 1/4 of Section 30, T9S, R22E, S.L.B.&M. Uintah County, Utah.

## T9S, R22E, S.L.B.&M.

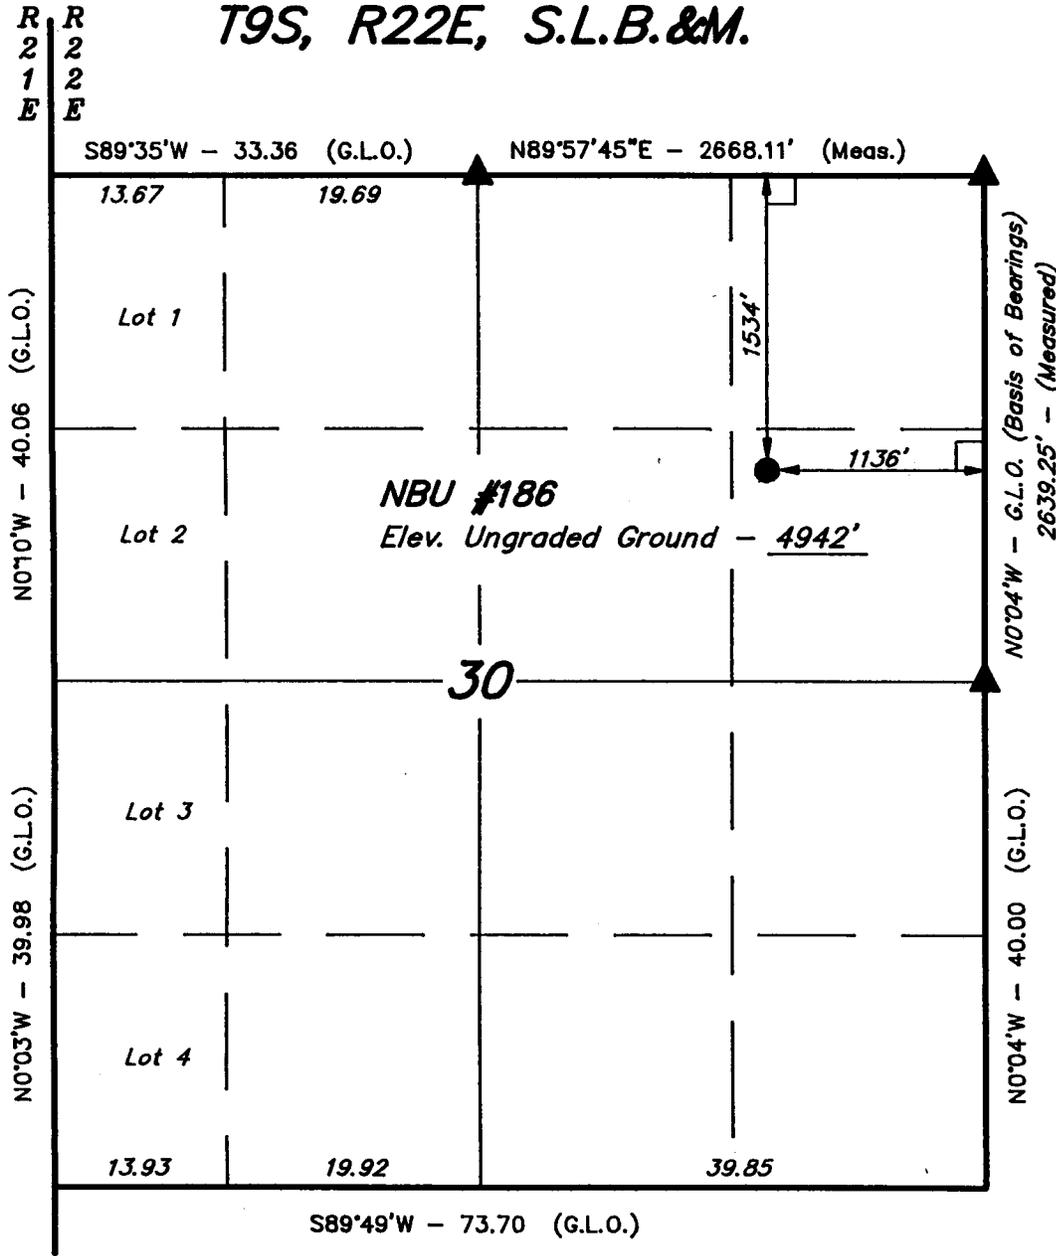

### BASIS OF ELEVATION


BENCH MARK 23EAM, LOCATED IN THE NW 1/4 OF SECTION 19, T9S, R22E, S.L.B.&M. TAKEN FROM THE RED WASH SW QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4904 FEET.



SCALE

### CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



### UINTAH ENGINEERING & LAND SURVEYING



P. O. BOX 1758 - 85 SOUTH - 200 EAST

VERNAL, UTAH - 84078

SCALE 1" = 1000'	DATE 1-27-92
PARTY G.S. L.D.T. R.E.H.	REFERENCES G.L.O. PLAT
WEATHER COLD	FILE COASTAL OIL & GAS CORP.

▲ = SECTION CORNERS LOCATED. (Brass Caps)

# BOP STACK

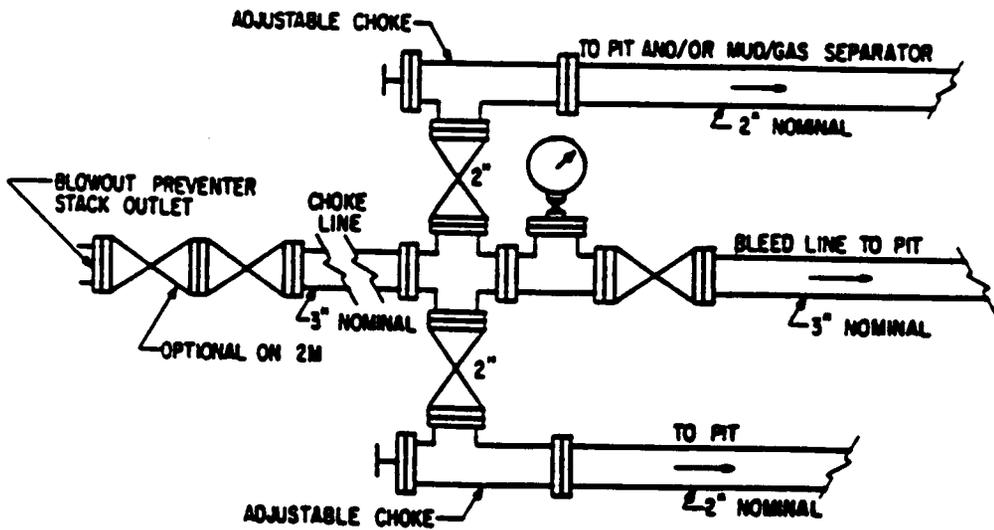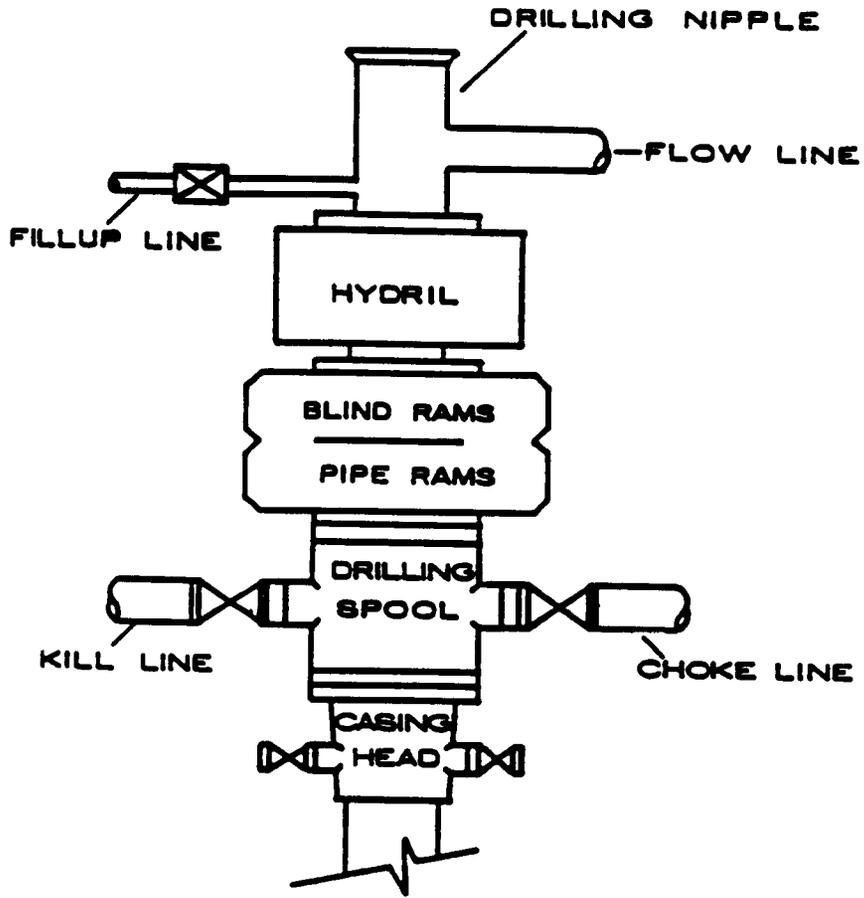

COASTAL OIL & GAS CORPORATION  
Lease #U-463, NBU #186  
SE/NE, Section 30, T9S, R22E  
Uintah County, Utah

Drilling Prognosis

1. Estimated Tops of Important Geologic Markers:

Uinta	Surface	Wasatch	4715'
		Total Depth	6225'

2. Estimated Depths of Anticipated Water, Oil, Gas or Mineral Formations:

Wasatch                    4715'                    Gas (Primary Objective)

If any shallow water zones are encountered, they will be adequately protected and reported; none anticipated. All potentially productive hydrocarbon zones will be cemented off.

3. Pressure Control Equipment: (Schematic Attached)

A. Type: 10" Double Gate Hydraulic.

The Blow-Out Preventer will be equipped as follows:

1. One (1) blind ram (above).
2. One (1) pipe ram (below).
3. Kill line (2-inch minimum).
4. One (1) kill line valve (2-inch minimum).
5. One (1) choke line valve.
6. Two (2) adjustable chokes.
7. Upper kelly cock valve with handle available.
8. Safety valve & subs to fit all drill strings in use.
9. 2-inch (minimum) choke line.
10. Pressure gauge on choke manifold.

B. Pressure Rating: 3,000 psi

C. Testing Procedure:

At a minimum, the BOP, choke manifold, and related equipment will be pressure tested to the approved working pressure of the BOP stack (if isolated from the surface casing by a test plug) or to 70% of the internal yield strength of the surface casing (if the BOP is not isolated from the casing by a test plug). Pressure will be maintained for a period of at least ten (10) minutes or until the requirements of the test are met, whichever is longer.

3. Pressure Control Equipment:

C. Testing Procedure: Continued

At a minimum, the above pressure test will be performed:

1. When the BOP is initially installed.
2. Whenever any seal subject to test pressure is broken.
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition to the above, the pipe and blind rams will be activated each trip, but not more than once each day.

All BOP drills and tests will be recorded in the IADC driller's log.

D. Choke Manifold Equipment.

All choke lines will be straight lines unless turns use tee blocks or are targeted with running tees, and will be anchored to prevent whip and vibration.

E. Accumulator:

The accumulator will have sufficient capacity to close all BOP's and retain 200 psi above precharge. Nitrogen bottles which meet the manufacturer's specifications will be used as the backup to the required independent power source. The accumulator precharge pressure test will be conducted prior to connecting the closing unit to the BOP stack and at least once every six (6) months thereafter. The accumulator pressure will be corrected if the measured precharge pressure is found to be above or below the maximum or minimum limits specified in Onshore Operating Order #2.

F. Special Drilling Operations:

In addition to the equipment already specified in Items A through E, above, the following equipment will be in place and operational during air/gas drilling:

1. Properly lubricated and maintained rotating head.
2. Spark arresters on engines or water cooled exhaust.
3. Blooie line discharge 100 feet from wellbore and securely anchored.

3. Pressure Control Equipment:

F. Special Drilling Operations: Continued

4. Straight run on blooie line.
5. Deduster equipment (not required for aerated water system).
6. All cuttings and circulating medium(s) shall be directed into a reserve or blooie pit.
7. Float valve above bit.
8. Automatic igniter or continuous pilot light on the blooie line (not required for aerated water system).
9. Compressors located in the opposite direction from the blooie line and at a minimum of 100 feet from the wellbore.
10. Mud circulating equipment, water, and mud materials (does not have to be pre-mixed) sufficient to maintain the capacity of the hole and circulating tanks or pits.

G. Miscellaneous Information:

The Blow-Out Preventer and related pressure control equipment will be installed, tested and maintained in compliance with the specifications in and requirements of Onshore Operating Order #2.

The choke manifold and BOP extension rods with hand wheels will be located outside the rig sub-structure. The hydraulic BOP closing unit will be located at least twenty-five (25) feet from the wellhead but readily accessible to the driller.

Exact locations and configurations of the hydraulic BOP closing unit will depend upon the particular rig contracted to drill this hole.

A flare line will be installed after the choke manifold, extending 100 feet (minimum) from the center of the drill hole to a separate flare pit.

4. The Proposed Casing and Cementing Program: (All New)

A. Casing Program

Hole Size Casing Size Wt./Ft. Grade Joint Depth Set

12-1/4" 8-5/8" 24# K-55 ST&C 0-250'

4. The Proposed Casing and Cementing Program: (All New)

A. Casing Program - Continued

<u>Hole Size</u>	<u>Casing Size</u>	<u>Wt./Ft.</u>	<u>Grade</u>	<u>Joint</u>	<u>Depth Set</u>
7-7/8"	5-1/2"	17.0#	K-55	LT&C	0-6225'

Casing string(s) will be pressure tested to 0.22 psi per foot, or 1500 psi (not to exceed 70% of the internal yield strength of the casing), whichever is greater, after cementing and prior to drilling out from under the casing shoe.

B. Cementing Program

Surface Casing : Cement with approximately 180 sx. Class "G" cement + additives, circulated to surface with 100% excess.

Production Casing: Lead with approximately 400 sx. Hi-fill cement with 1#/sx. capseal; tail with 600 sx. 50-50 POZ w/10% salt, 2% gel, .6% Halad 24, 1/4#/sx. Flocele & 1#/sx. capseal. Cement will be circulated back to surface with 30% excess.

Actual cement volumes to be required will be determined from the caliper log.

All waiting on cement (WOC) times will be adequate to achieve a minimum of 500 psi compressive strength at the casing shoe prior to drilling out.

5. Mud Program: (Visual Monitoring)

<u>Interval</u>	<u>Type</u>	<u>Weight</u>	<u>Viscosity</u>	<u>Fluid Loss</u>
0-1500'	Aerated/ Mist	-----	-----	-----
1500-6225'	Aerated Water	-----	-----	-----

Sufficient quantities of mud materials will be maintained or readily accessible for the purpose of assuring well control during the course of drilling operations.

5. Mud Program: (Visual Monitoring - continued)

The surface hole will be drilled with an air mist system, injecting water @ the rate of 15-20 gallons/minute, until the lost circulation zone is reached @  $\pm 1500'$ . At that point, Coastal Oil & Gas Corporation will switch to an aerated water system, utilizing the rig pumps to inject water at a rate of 190 gallons/minute to total depth.

6. Evaluation Program:

Logs : Dual Laterlog & Caliper : TD - Surface  
FDC-CNL : TD - 2300'

DST'S : None anticipated.

Cores : None anticipated.

The proposed evaluation program may change at the discretion of the wellsite geologist, with prior approval from the Authorized Officer, Bureau of Land Management.

Stimulation : No stimulation or frac treatment has been formulated for this test at this time. The drill site, as approved, will be of sufficient size to accommodate all completion activities.

Whether the well is completed as a dry hole or as a producer, Well Completion and Recompletion Report and Log (Form 3160-4) will be submitted to the Vernal District Office not later than thirty (30) days after the completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164.

Two (2) copies of all logs, core descriptions, core analyses, well test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the Authorized Officer, Vernal District Office, Bureau of Land Management, 170 South 500 East, Vernal, Utah 84078, Phone: (801) 789-1362.

7. Abnormal Conditions:

No abnormal temperatures or pressures are anticipated. No H<sub>2</sub>S has been encountered in or known to exist from previous wells drilled to similar depths in the general area. Maximum anticipated bottom hole pressure equals approximately 2,895 psi (calculated at 0.465 psi/foot) and maximum anticipated surface pressure equals approximately 1,525 psi (bottom hole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. Anticipated Starting Dates and Notification of Operations:

A. Drilling Activity

Anticipated Commencement Date : April 1, 1992  
Drilling Days : Approximately 10 days  
Completion Days : Approximately 7 days

B. Notification of Operations

The Vernal District Office, Bureau of Land Management will be notified at least twenty-four (24) hours PRIOR to the commencement of the following activities:

1. Spudding of the well. This oral report will be followed up with a Sundry Notice (Form 3160-5).
2. Initiating pressure tests of the blow-out preventer and related equipment.
3. Running casing and cementing of ALL casing strings.

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in suspended status without prior approval of the Authorized Officer. If operations are to be suspended, prior approval of the Authorized Officer will be obtained and notification given before resumption of operations.

8. Anticipated Starting Dates and Notification of Operations:

B. Notification of Operations - Continued

In accordance with Onshore Operating Order #1, this well will be reported on MMS Form 3160-6, "Monthly Report of Operations", starting with the month in which operations commence and continuing each month until the well is physically plugged and abandoned. This report will be filed directly with the Royalty Management Program, Minerals Management Service, P. O. Box 17110, Denver, Colorado 80217.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the provisions of NTL-3A or its current revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed for prior approval of the Authorized Officer, and all conditions of this approved plan will be applicable during all operations conducted with the replacement rig.

Should the well be successfully completed for production, the Authorized Officer will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communication no later than five (5) business days following the date on which the well is placed on production.

Pursuant to NTL-2B, with the approval of the Authorized Officer, produced water may be temporarily disposed of into the reserve pit for a period of up to ninety (90) days. During this period so authorized, an application for approval of the permanent disposal method, along with the required water analysis and other information, must be submitted to the Authorized Officer.

Pursuant to NTL-4A, lessees and operators are authorized to vent/flare gas during initial well evaluation tests, not exceeding a period of thirty (30) days or the production of fifty (50) MMCF of gas, whichever occurs first. An application must be filed with the Authorized Officer, and approval received, for any venting/flaring of gas beyond the initial thirty (30) day or otherwise authorized test period.

8. Anticipated Starting Dates and Notification of Operations:

B. Notification of Operations - Continued

A schematic facilities diagram as required by 43 CFR 3162.7-2, 3162.7-3, and 3162.7-4 shall be submitted to the Vernal District Office within thirty (30) days of installation or first production, whichever occurs first. All site security regulations as specified in 43 CFR 3162.7 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-4.

A first production conference will be scheduled within fifteen (15) days after receipt of the first production notice.

No well abandonment operations will be commenced without the prior approval of the Authorized Officer. In the case of newly-drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the Authorized Officer.

A "Notice of Intention to Abandon" (Form 3160.5) will be filed with the Authorized Officer within fifteen (15) days following the granting of oral approval to plug & abandon.

Upon completion of approved plugging, a regulation marker will be erected in accordance with 43 CFR 3162.6. The following information will be permanently placed on the marker with a plate, cap, or beaded-on with a welding torch: "Fed" or "Ind", as applicable; Company Name, Well Name and Number, Location by Quarter/Quarter, Section, Township, Range, and Federal or Indian Lease Number.

A "Subsequent Report of Abandonment" (Form 3160-5) will be submitted within thirty (30) days following the actual plugging of the wellbore. This report will indicate where plugs were placed and the current status of surface restoration operations. If surface restoration has not been completed at that time, a follow-up report on Form 3160-5 will be filed when all surface restoration work has been completed and the location is considered ready for final inspection. Final abandonment will not be approved until the surface reclamation work required by the approved Application for Permit to Drill has been completed to the satisfaction of the Authorized Officer or his representative, or the appropriate Surface Management Agency.

8. Anticipated Starting Dates and Notification of Operations:

B. Notification of Operations - Continued

Pursuant to Onshore Operating Order #1, lessees and operators have the responsibility to see that their exploration, development, production, and construction operations are conducted in such a manner which conforms with applicable Federal laws and regulations and with State and local laws and regulations to the extent that such State and local laws are applicable to operations on Federal and Indian lands.

COASTAL OIL & GAS CORPORATION  
Lease #U-463 NBU #186  
SE/NE, Section 30, T9S, R22E  
Uintah County, Utah

Multi-Point Surface Use and Operations Plan

1. Existing Roads: Refer to Maps "A" & "B" (shown in ORANGE)
  - A. The proposed wellsite is staked and four 200-foot reference stakes are present.
  - B. To reach the location from the town of Vernal, Utah proceed westerly approximately 14.0 miles on U.S. Highway 40 to the junction of State Highway 88, exit left and proceed south  $\pm 17.0$  miles on State Highway 88 to Ouray, Utah; proceed south from Ouray  $\pm 6.9$  miles on the Seep Ridge Road to the junction of this road and an existing oilfield service road to the east; turn left and proceed in an easterly direction  $\pm 5.0$  miles to the junction of this road and an existing road to the north; turn left and proceed in a northerly direction  $\pm 0.3$  miles to the junction of this road and an existing road to the north-east; turn right and proceed  $\pm 4.9$  miles in a northeasterly direction to the junction of this road and an existing road to the southeast; turn right and proceed in a southeasterly direction  $\pm 1.6$  miles to the beginning of the proposed access road. Follow road flags in a southerly direction approximately  $\pm 0.3$  miles to the proposed location.
  - C. Access roads - refer to Maps "A" and "B".
  - D. Access roads within a one-mile radius - refer to Map "B".
  - E. The existing gravel roads will be maintained in the same or better condition as existed prior to the commencement of operations and said maintenance will continue until final abandonment and reclamation of the NBU #186 well location.
2. Planned Access Roads: Refer to Map "B" (Shown in GREEN)

Approximately 0.3 mile of new road construction will be required for access to the proposed NBU #186 well location.

  - A. Width - maximum 30-foot overall right-of-way with an 18-foot road running surface, crowned and ditched.

2. Planned Access Roads: Continued

- B. Construction standard - the access road will be constructed in accordance with Bureau of Land Management Rooding Guidelines established for oil and gas exploration and development activities as referenced in the BLM/USFS publication: Surface Operating Standards for Oil and Gas Exploration and Development (1989).

The access road will be constructed to meet the standards of the anticipated traffic flow and all-weather requirements. Construction/upgrading will include ditching, draining, gravelling, crowning, and capping the roadbed as necessary to provide a well constructed and safe road.

Prior to construction/upgrading, the roadway shall be cleared of any snow cover and allowed to dry completely.

Traveling off of the thirty (30) foot right-of-way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or the accumulation of debris in the drainage crossing nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at a frequent intervals by means of cutouts.

Upgrading shall not be allowed during muddy conditions.

Should mud holes develop, they shall be filled in and detours around them avoided.

- C. Maximum grade - 8%
- D. Turnouts - turnouts will be constructed along the access route as necessary or required to allow for the safe passage of traffic. None anticipated at this time.
- E. Drainage design - the access road will be crowned, ditched, and water turnouts installed as necessary to provide for proper drainage along the access road route.
- F. Culverts, cuts and fills - no culverts will be required. There are no major cuts and/or fills on/along the proposed access road route.

2. Planned Access Roads: Continued

- G. Surface materials (source) - any construction materials which may be required for surfacing of the access road will be purchased from a local contractor having a permitted source of materials in the area, if required by the Authorized Officer, Bureau of Land Management. None anticipated at this time. Native material from access location and access road will be used.
- H. Road maintenance - during both the drilling and production phase of operations, the road surface and shoulders will be kept in a safe and useable condition and will be maintained in accordance with the original construction standards. All drainage ditches and culverts will be kept clear and free-flowing, and will also be maintained in accordance with the original construction standards.
- The access road right-of-way will be kept free of trash during operations.
- I. The proposed access route has been centerline flagged.

3. Location of Existing Wells Within a One-Mile Radius:

Please refer to Map "C"

- A. Water wells - none known.
- B. Abandoned wells - NE1/4, SW1/4, Section 19, T9S, R22E  
NW1/4, SE1/4, Section 30, T9S, R22E  
SW1/4, NE1/4, Section 29, T9S, R22E
- C. Temporarily abandoned wells - none known.
- D. Disposal wells - none known.
- E. Drilling wells - none known.
- F. Producing wells - SW1/4, SW1/4, Section 19, T9S, R22E  
SE1/4, SW1/4, Section 20, T9S, R22E  
NW1/4, NW1/4, Section 29, T9S, R22E  
SE1/4, NW1/4, Section 29, T9S, R22E  
NW1/4, SW1/4, Section 29, T9S, R22E  
NE1/4, SW1/4, Section 29, T9S, R22E  
NW1/4, NW1/4, Section 32, T9S, R22E  
NE1/4, NE1/4, Section 31, T9S-R22E  
NW1/4, NE1/4, Section 31, T9S-R22E  
SE1/4, SE1/4, Section 30, T9S-R22E  
NW1/4, SW1/4, Section 30, T9S-R22E  
SE1/4, NW1/4, Section 30, T9S-R22E  
NW1/4, NW1/4, Section 30, T9S-R22E  
NW1/4, NE1/4, Section 30, T9S-R22E  
NE1/4, SE1/4, Section 25, T9S-R21E

3. Location of Existing Wells Within a One-Mile Radius:

Please refer to Map "C"

- G. Shut-in wells - none known.
- H. Injection wells - none known.
- I. Monitoring wells - none known.

4. Location of Existing and/or Proposed Facilities Owned by Coastal Oil & Gas Corporation Within a One-Mile Radius:

A. If well is productive the following guidelines will be followed:

1. A diagram showing the proposed production facilities layout will be submitted via Sundry Notice Form 3160-5 prior to facilities installation.
2. All production facilities will be located on the disturbed portion of the well pad and at a minimum of twenty-five (25) feet from the toe of the backslope or top of the fill slope.
3. The production facilities (consisting primarily of a christmas tree at the wellhead, dehydration unit, and emergency pit) will require an area approximately 300' x 135'.
4. Production facilities will be accommodated on the existing well pad. Construction materials required for installation of the production facilities will be obtained from the site; any additional materials required will be purchased from a local supplier having a permitted (private) source of materials with the area.

A dike will be constructed completely around those production facilities which contain fluids (i.e., production tanks, produced water tanks and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

5. All permanent (on-site for six months or longer) above-the-ground structures constructed or installed including pumping units will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Five (5) State Rocky Mountain Interagency Committee.

4. Location of Existing and/or Proposed Facilities Owned by Coastal Oil & Gas Corporation Within a One-Mile Radius:

A. If well is productive the following guidelines will be followed:

5. Continued

All production facilities will be painted within six (6) months of installation. Facilities required to comply with Occupational Health and Safety Act Rules and Regulations will be excluded from this painting requirement.

The required paint color is Carlsbad Canyon, Munsell standard color number 2.5Y6/2.

6. If at any time the facilities located on public lands and authorized by the terms of the lease are no longer included in the lease (due to a contraction in the unit or other lease or unit boundary change), the Bureau of Land Management will process a change in authorization to the appropriate statute. The authorization will be subject to the appropriate rental or other financial obligation as determined by the Authorized Officer.

7. A 4" surface gas pipeline will be installed from the NBU #186 gas well and tie into the existing gas pipeline located in Section 30, T9S-R22E (see attached Topo Map D). This pipeline will be inside the Natural Buttes Unit boundary and within federal lease #U-463. A 30' width easement of approximately 1208' length is requested for this pipeline. There will be minimum surface disturbance as the pipeline will be laid on the surface.

B. The production (emergency) pit will be fenced with woven wire mesh topped with one (1) strand of barbed wire held in place with metal side posts and wooden corner "H" braces in order to protect livestock and wildlife. Please refer to Item #9E (page #9) for additional information on the fencing specifications.

C. During drilling and subsequent operations, all equipment and vehicles will be confined to the access road right-of-way and any additional areas as specified in the approved Application for Permit to Drill.

4. Location of Existing and/or Proposed Facilities Owned by Coastal Oil & Gas Corporation Within a One-Mile Radius:

- D. Reclamation of disturbed areas no longer needed for operations will be accomplished by grading, leveling and seeding as recommended by the Authorized Officer, Bureau of Land Management.

5. Location and Type of Water Supply:

- A. Fresh water for drilling will be obtained from the Indian water line in Ouray, Utah, located in the SE1/4 of Section 32, Township 8 South, Range 20 East, Uintah County, Utah.
- B. Water will be transported over existing roads via tank truck from the point of diversion to the proposed NBU #186 well location. No new construction will be required on/along the proposed water haul route. No off-lease/unit federal lands will be crossed on/along the proposed water haul route.
- C. No water well will be drilled on this location.

6. Source of Construction Materials:

- A. Construction materials needed for surfacing of the well pad will be native from location and/or access road.
- B. No construction materials will be taken from Federal and/or Indian lands without prior approval from the appropriate Surface Management Agency.
- C. If production is established, any additional construction materials needed for surfacing the access road and installation of production facilities will be purchased from a local supplier having a permitted (private) source of materials in the area.
- D. No new access roads for construction materials will be required.

7. Methods of Handling Waste Materials:

- A. Cuttings - the cuttings will be deposited in the reserve/blooiie pit.

7. Methods of Handling Waste Materials: Continued

- B. Drilling fluids - including salts and chemicals will be contained in the reserve/bloolie pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within ninety (90) days after termination of drilling and completion activities.

In the event adverse weather conditions event removal of the fluids from the reserve pit within this time period, an extension may be granted by the Authorized Officer upon receipt of a written request from Coastal Oil & Gas Corporation. The reserve pit will be constructed so as not to leak, break, or allow discharge. The reserve pit will be lined. A plastic nylon reinforced liner will be used. It will be a minimum of 12 MIL thickness w/sufficient bedding (either straw or dirt) to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash, scrap pipe, etc., that could puncture the liner will be disposed of in the pit. More stringent protective requirements may be deemed necessary by the Authorized Officer.

- C. Produced fluids - liquid hydrocarbons produced during completion operations will be placed in test tanks on the location. Produced waste water will be confined to a lined pit (reserve pit) or storage tank for a period not to exceed ninety (90) days after initial production. During the ninety (90) day period, in accordance with NTL-2B, an application for approval of a permanent disposal method and location, along with the required water analysis, shall be submitted for the Authorized Officer's approval. Failure to file an application within the time frame allowed will be considered an incidence of noncompliance.

Any spills of oil, gas, salt water or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

- D. Sewage - self-contained, chemical toilets will be provided by Rocket Sanitation for human waste disposal. Upon completion of operations, or as needed, the toilet holding tanks will be pumped and the contents thereof disposed of in the nearest, approved, sewage disposal facility.

7. Methods of Handling Waste Materials: Continued

- E. Garbage (trash) and other waste material - garbage, trash and other waste materials will be collected in a portable, self-contained and fully-enclosed trash cage during drilling and completion operations. Upon completion of operations (or as needed) the accumulated trash will be disposed of at an authorized sanitary landfill. No trash will be burned on location or placed in the reserve pit.
- F. Immediately after removal of the drilling rig, all debris and other waste materials not contained in the trash cage will be cleaned up and removed from the well location. No adverse materials will be left on the location upon the termination of drilling and completion operations. Any open pits will be fenced during the drilling operation and the fencing will be maintained until such time as the pits are backfilled.

8. Ancillary Facilities:

None anticipated.

9. Wellsite Layout:

- A. Figure #1 shows the drill site layout as staked. Cross sections have been drafted to visualize the planned cuts and fills across the location. A minimum of six (6) inches of topsoil will be stripped from the location (including areas of cut, fill, and/or subsoil storage) and stockpiled for future reclamation of the wellsite. Refer to Figure #1 for the location of the topsoil and subsoil stockpiles. (Stockpiled topsoil will be located on the west side of the location.) The reserve pit will be located on the northwest side of the location. The flare pit will be located downwind of the prevailing wind direction on the northeast side of location. Access to the location will be from the north. The drainage(s) from location shall be diverted from location.
- B. Figure #1 is a diagram showing the rig layout. No permanent living facilities are planned. There will be one (1) trailer on location during drilling operations for the toolpusher.

9. Wellsite Layout: Continued

- C. A diagram showing the proposed production facility layout will be submitted to the Authorized Officer via Sundry Notice (Form 3160-5) for approval of subsequent operations. Please refer to Item #4A (page #4) for additional information in this regard.
- D. If porous subsoil materials (gravel, scoria, sand, faulted rock structures, etc.) are encountered during reserve pit construction, an impervious liner will be installed in order to prevent drilling water loss through seepage.
- E. Prior to the commencement of drilling operations, the reserve pit will be fenced "sheep tight" on three (3) sides according to the following minimum standards:
  - 1. 39-inch net wire shall be used with at least one (1) strand of barbed wire on top of the net wire (barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
  - 2. The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least 42 inches.
  - 3. Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.
  - 4. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two (2) posts shall be no greater than sixteen (16) feet.
  - 5. All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The fourth side of the reserve pit will be fenced immediately upon removal of the drilling rig and the fencing will be maintained until the pit is backfilled.
- F. Any hydrocarbons on the pit will be removed from the pit as soon as possible after drilling operations are completed.

10. Plans for Reclamation of the Surface:

A. Production

1. Immediately upon well completion, the well location and surrounding area(s) will be cleared of all unused tubing, equipment, debris, materials, trash and junk not required for production.
2. Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with 43 CFR 3162.7-1.
3. If a plastic or nylon reinforced pit liner is used, it shall be torn and perforated before backfilling of the reserve pit.
4. Before any dirt work to restore the location takes place, the reserve pit will be completely dry and all cans, barrels, pipe, etc. will be removed. Other waste and spoil materials will be disposed of immediately upon completion of drilling and workover activities.
5. The reserve pit and that portion of the location and access road not needed for production facilities/operations will be reclaimed within ninety (90) days from the date of well completion, weather permitting.
6. For production, the fill slopes will be reduced from a 1.5:1 slope to a 3:1 slope and the cut slopes will be reduced from a 1.5:1 slope to a 3:1 slope by pushing the fill material back up into the cut.
7. Upon completion of backfilling, leveling and recontouring, the stockpiled topsoil will be evenly spread over the reclaimed area(s). Prior to reseeding, all disturbed surfaces (including the access road and location) will be scarified and left with a rough surface. No depressions will be left that would trap water and form ponds. All disturbed surfaces (including the access road and well pad areas) will be reseeded with a seed mixture to be recommended by the Authorized Officer, Bureau of Land Management.

10. Plans for Reclamation of the Surface:

A. Production: Continued

7. Seed will be drilled on the contour to an approximate depth of one-half (1/2) inch. All seeding will be conducted after September 15 and prior to ground frost.

B. Dry Hole/Abandoned Location

1. At such time as the well is physically plugged and abandoned, Coastal Oil & Gas Corporation will submit a "Subsequent Report of Abandonment" to the Authorized Officer for approval. At that time, the Bureau of Land Management will formulate and appropriate surface rehabilitation requirements and attach them as the conditions of approval for final abandonment.

11. Surface Ownership:

The wellsite and proposed access road in Section 30, T9S-R22E, are situated on surface estate which is owned by the United States of America.

This surface estate is administered by:

Area Manager  
Book Cliffs Resource Area Office  
Bureau of Land Management  
170 South 500 East  
Vernal, Utah 84078  
Phone: (801) 789-1362

That portion of proposed access road located in Section 19, T9S-R22E, is situated on surface estate owned by the Ute and Ouray Indian Tribes and administered by:

Bureau of Indian Affairs  
Ute & Ouray Agency  
P. O. Box 130  
Fort Duchesne, Utah 84026  
Phone: (801) 722-2406

12. Other Information:

- A. Coastal Oil & Gas Corporation will be responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites or for collecting artifacts.

If historic or archaeological materials are uncovered, Coastal Oil & Gas Corporation will suspend all operations that might further disturb such materials and immediately contact the Authorized Officer.

Within five (5) working days the Authorized Officer will inform Coastal Oil & Gas Corporation as to:

- whether the materials appear eligible for the National Register of Historic Places;
- the mitigation measures the operator will likely have to undertake before the site can be used (assuming in situ preservation is not necessary); and
- a time frame for the Authorized Officer to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the Authorized Officer are correct and that mitigation is appropriate.

If Coastal Oil & Gas Corporation wishes, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the Authorized Officer will assume responsibility for whatever recordation and stabilization of the exposed materials may be required. Otherwise, Coastal Oil & Gas Corporation will be responsible for mitigation costs.

The Authorized Officer will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the Authorized Officer that the required mitigation has been completed, Coastal Oil & Gas Corporation will then be allowed to resume construction.

12. Other Information: Continued

- B. Coastal Oil & Gas Corporation will control noxious weeds along rights-of-way for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds may be obtained from the Bureau of Land Management, or the Uintah County Extension Office. On lands administered by the Bureau of Land Management, it is required that a "Pesticide Use Proposal" shall be submitted, and approval obtained, prior to the application of herbicides or other pesticides or possible hazardous chemicals for the control of noxious weeds.
- C. Drilling rigs and/or equipment used during drilling operations on this wellsite will not be stacked or stored on federal lands after conclusion of drilling operations or at any other time without the proper authorization from the Bureau of Land Management. However, if BLM authorization is obtained, it is only a temporary measure to allow Coastal Oil & Gas Corporation the time to make arrangements for permanent storage at a commercial facility.

13. Additional Surface Stipulations:

- A. Coastal Oil & Gas Corporation shall contact the Bureau of Land Management between 24 and 48 hours prior to commencement of construction activities on the access road and/or well location: (801) 789-1362
- B. The Bureau of Land Management shall be notified upon site completion and prior to moving drilling tools onto the location.

14. Lessee's or Operator's Representative and Certification:

Representative

Coastal Oil & Gas Corporation  
Randy L. Bartley, Operations Manager  
P. O. Box 749  
Denver, Colorado 80201-0749  
Phone: (303) 572-1121

14. Lessee's or Operator's Representative and Certification:

Representative: Continued

Eileen Dey, Regulatory Analyst\*  
P. O. Box 749  
Denver, Colorado 80201-0749  
Phone: (303) 573-4476

\* Contact for any additional information which may be required for approval of this Application for Permit to Drill.

Certification:


All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil & Gas Orders, the approved plan of operations, and any applicable Notice to Lessees.

Coastal Oil & Gas Corporation will be fully responsible for the actions of their subcontractors. A complete copy of the approved Application for Permit to Drill will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.


I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Coastal Oil & Gas Corporation, its' contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

3/2/92  
Date


Eileen Danni Dey  
Eileen Danni Dey - Regulatory Analyst



SCALE: 1" = 50'  
DATE: 1-27-92  
Drawn By: J.R.S.




TYP. LOCATION LAYOUT  
TYP. CROSS SECTIONS

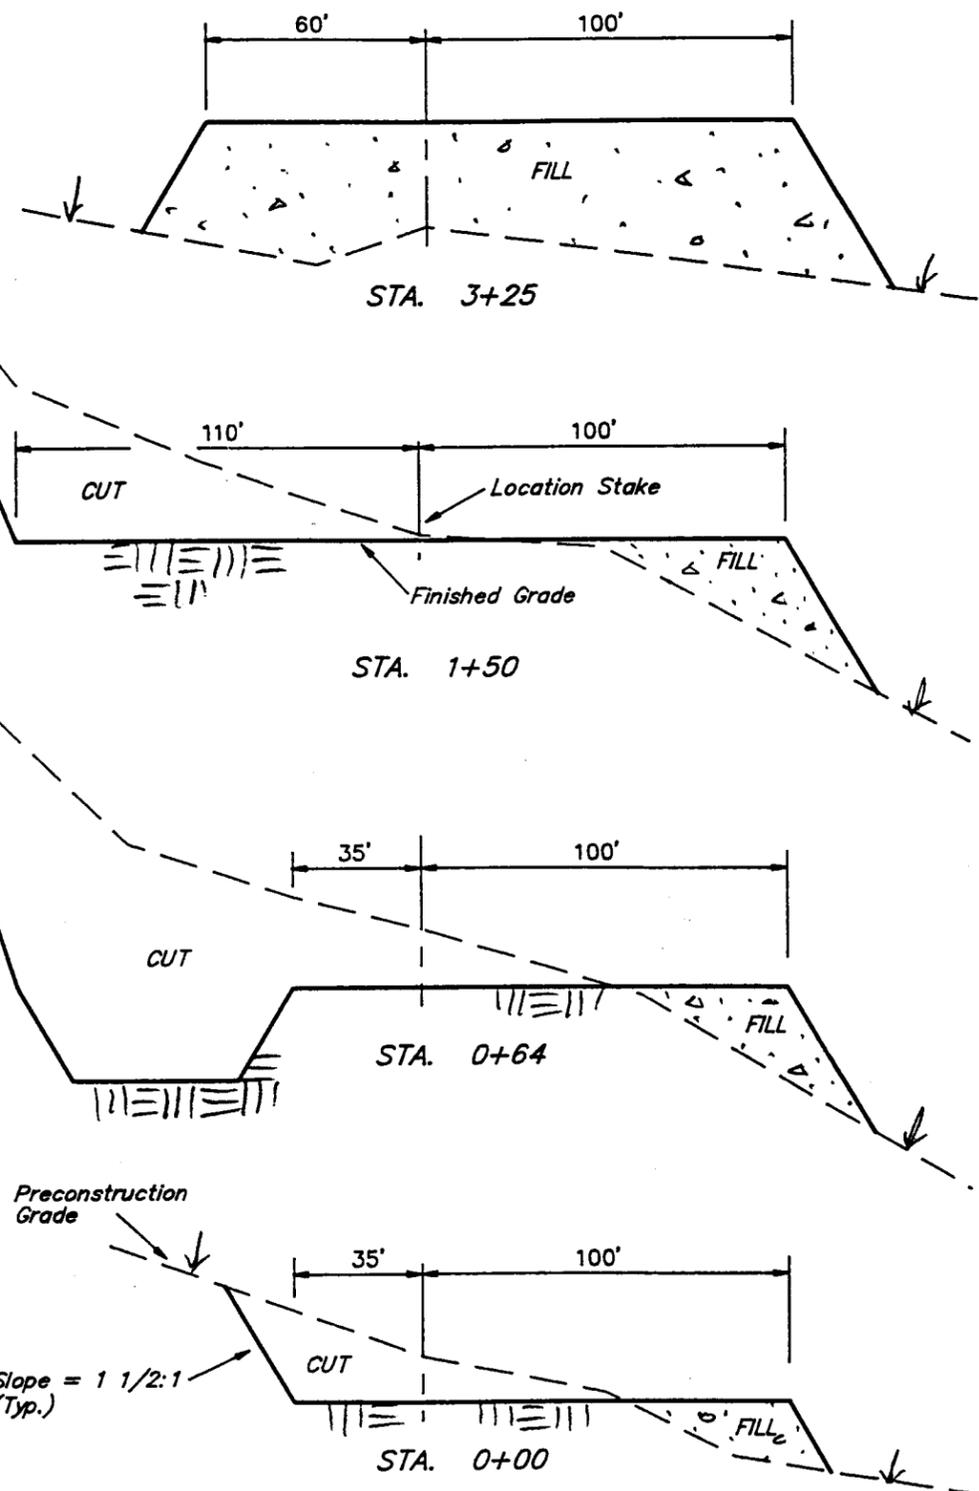

NOTES:

Elev. Ungraded Ground At Loc. Stake = **4942.4'**  
FINISHED GRADE ELEV. AT LOC. STAKE = **4941.8'**


FIGURE #1

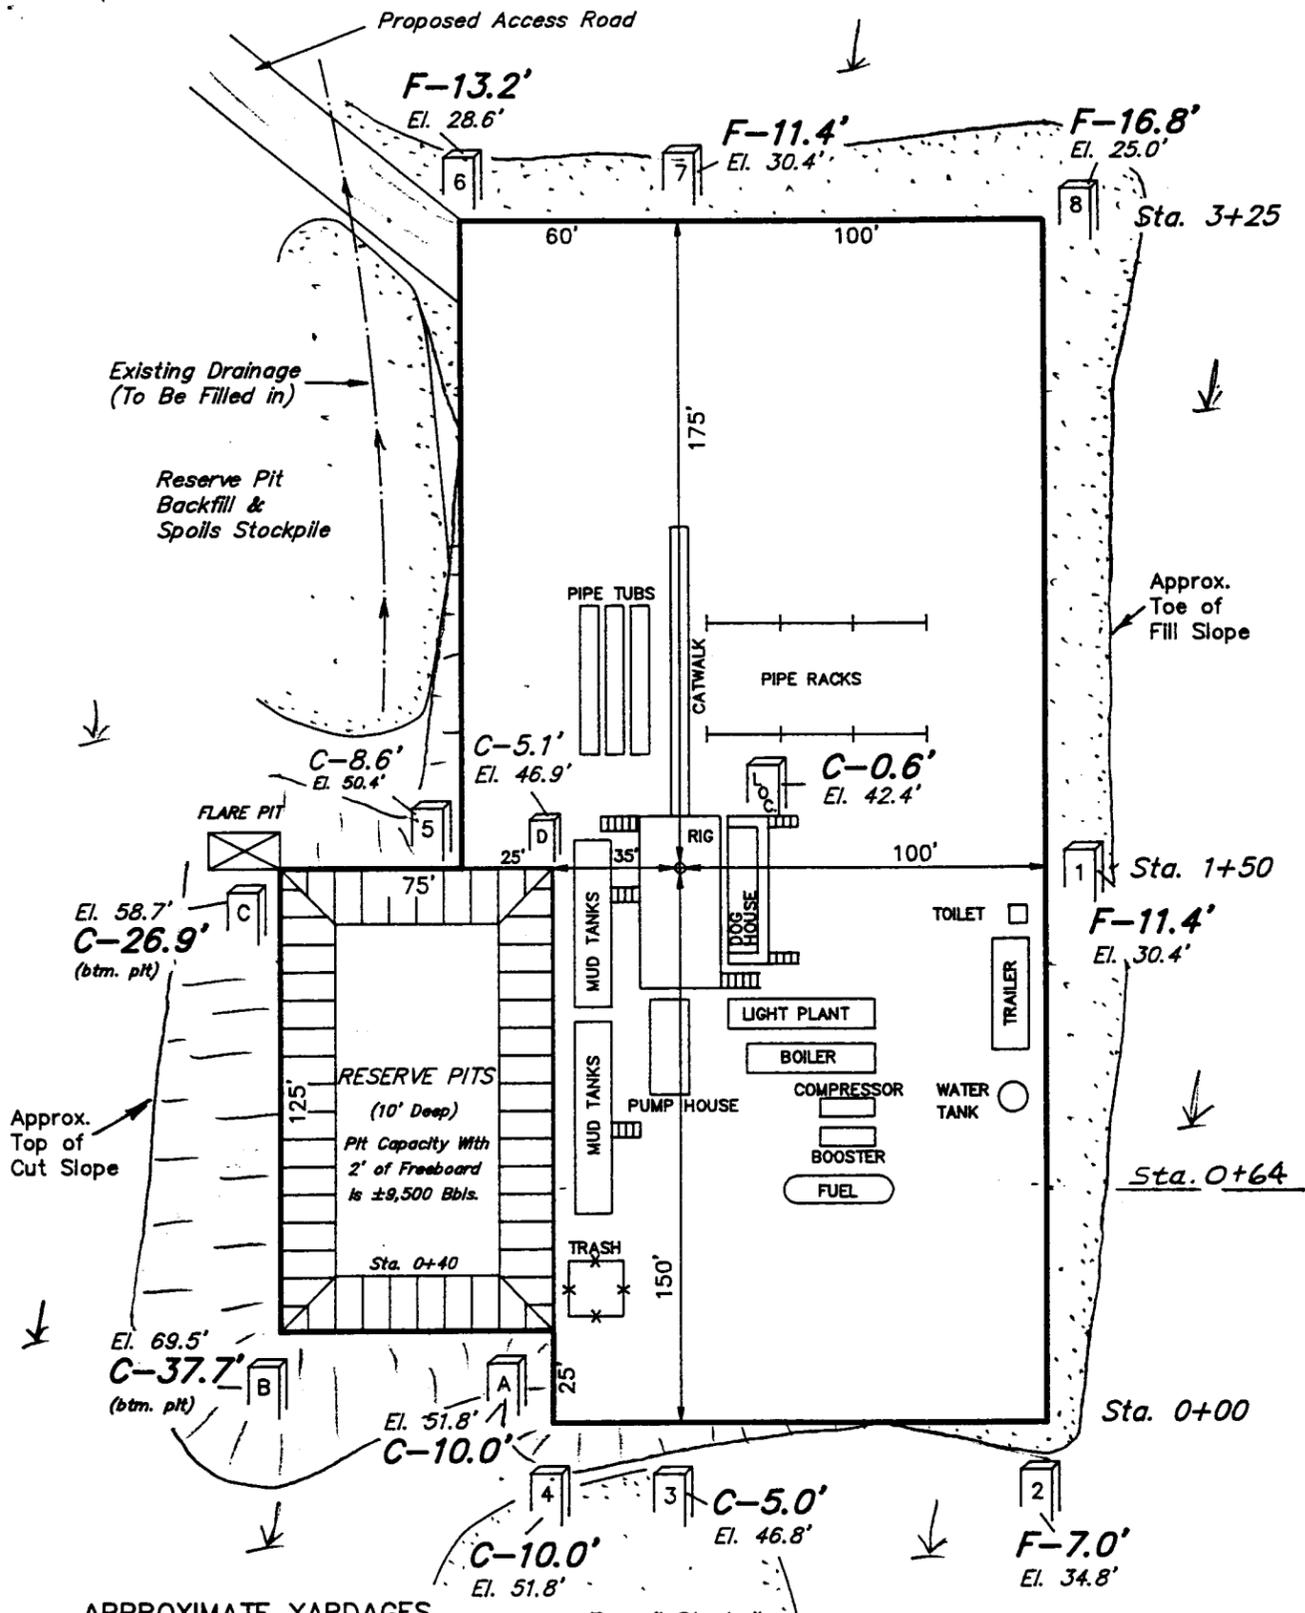

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,070 Cu. Yds.
Remaining Location	= 13,150 Cu. Yds.
<b>TOTAL CUT</b>	<b>= 14,220 CU.YDS.</b>
<b>FILL</b>	<b>= 11,330 CU.YDS.</b>

EXCESS MATERIAL AFTER 5% COMPACTION	= 2,290 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 2,290 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

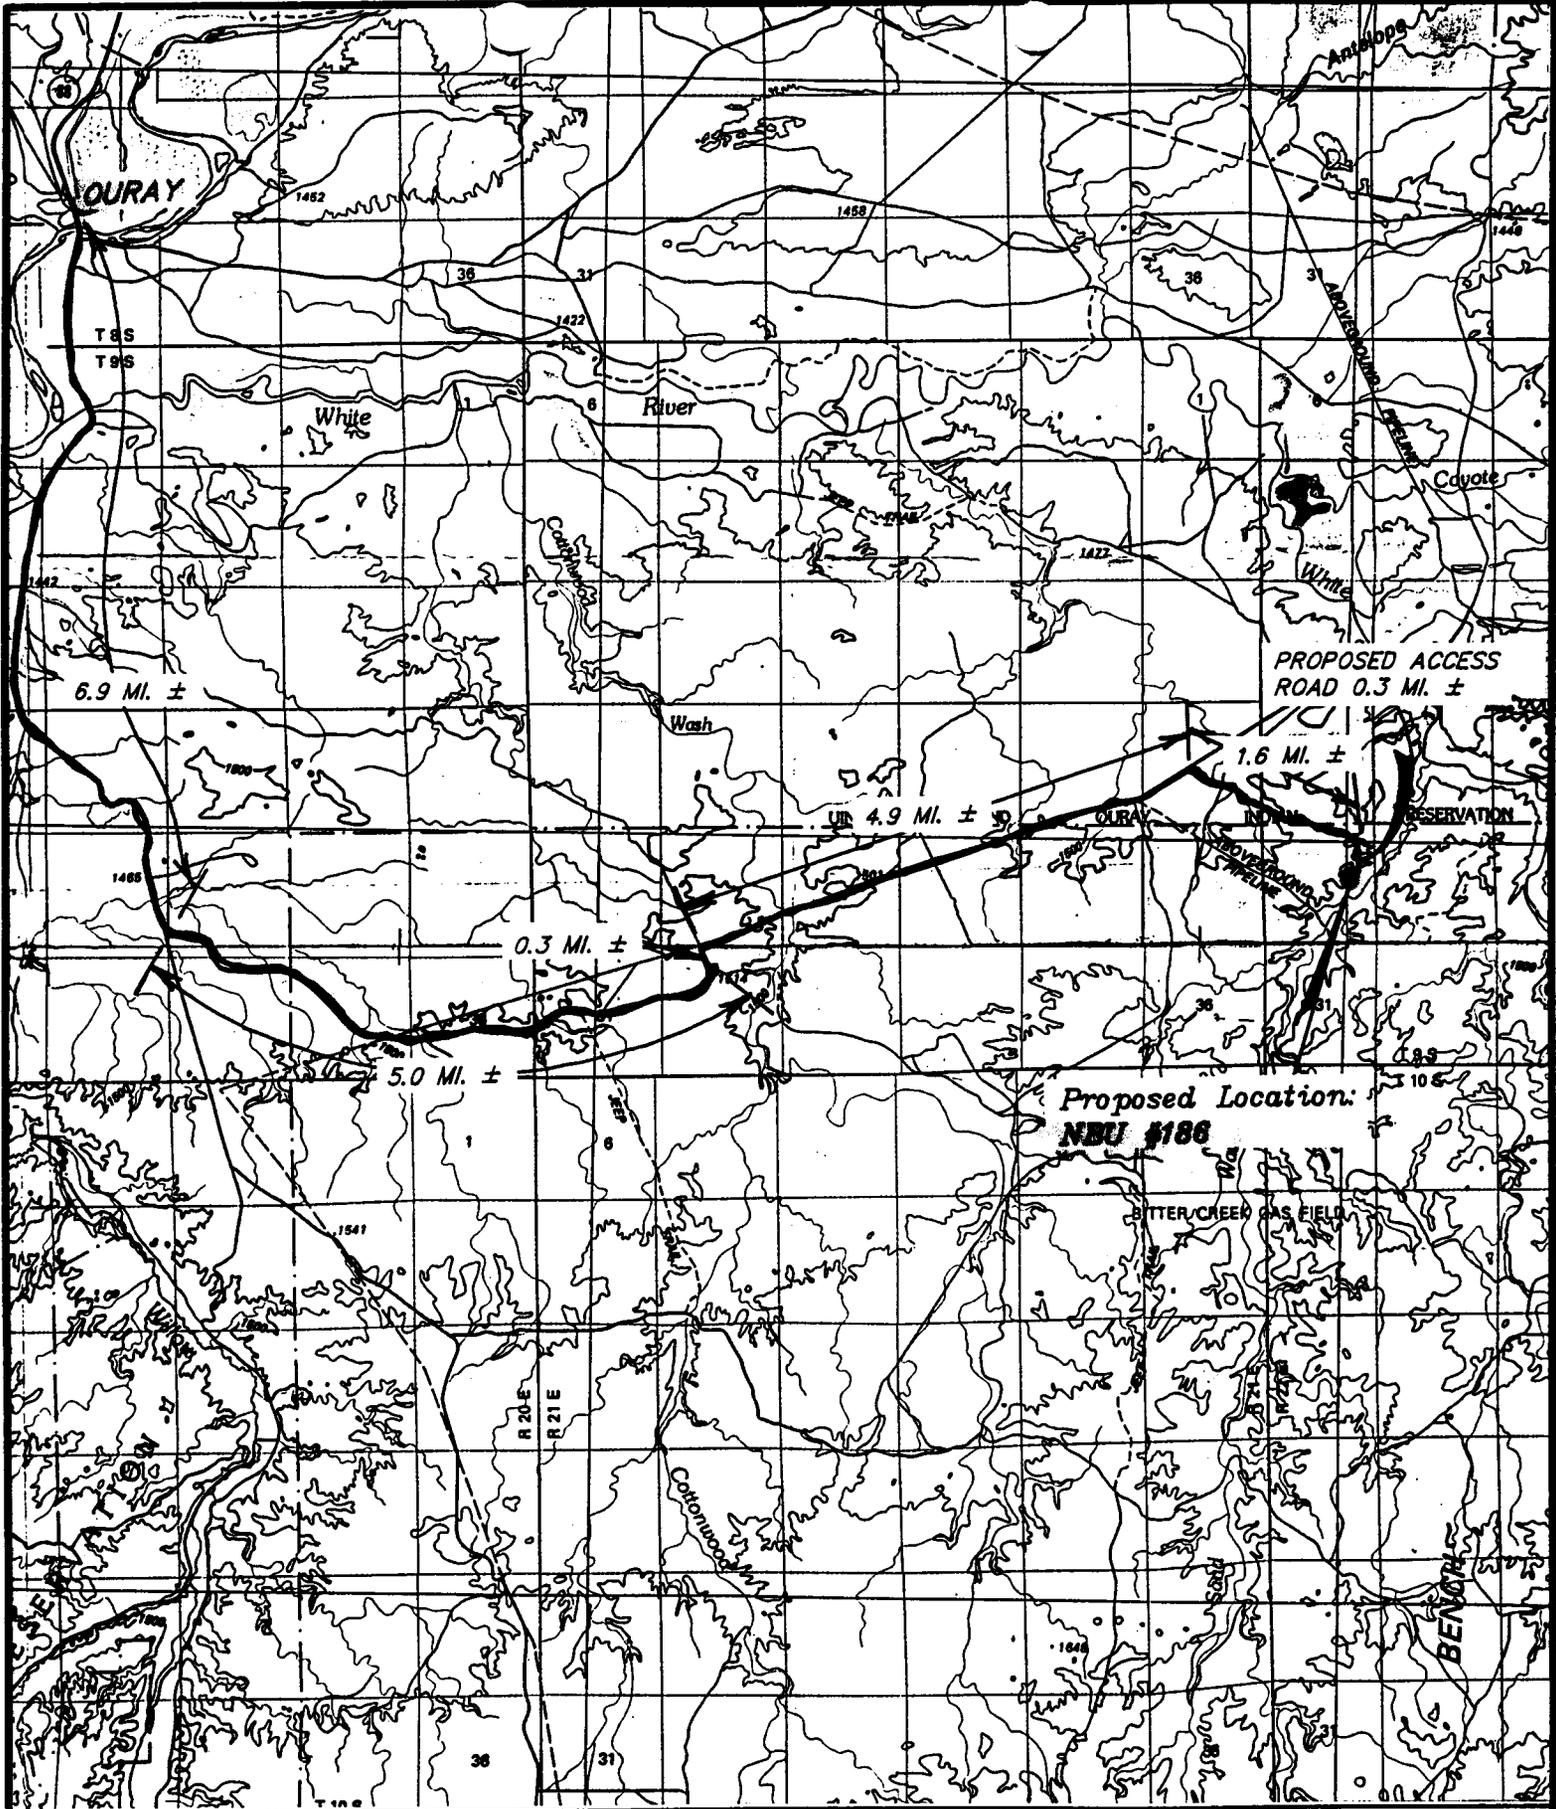

TOPOGRAPHIC  
MAP "A"


DATE 1-27-92 R.E.H.



**COASTAL OIL & GAS CORP.**

NBU #186


SECTION 30, T9S, R22E, S.L.B.&M.

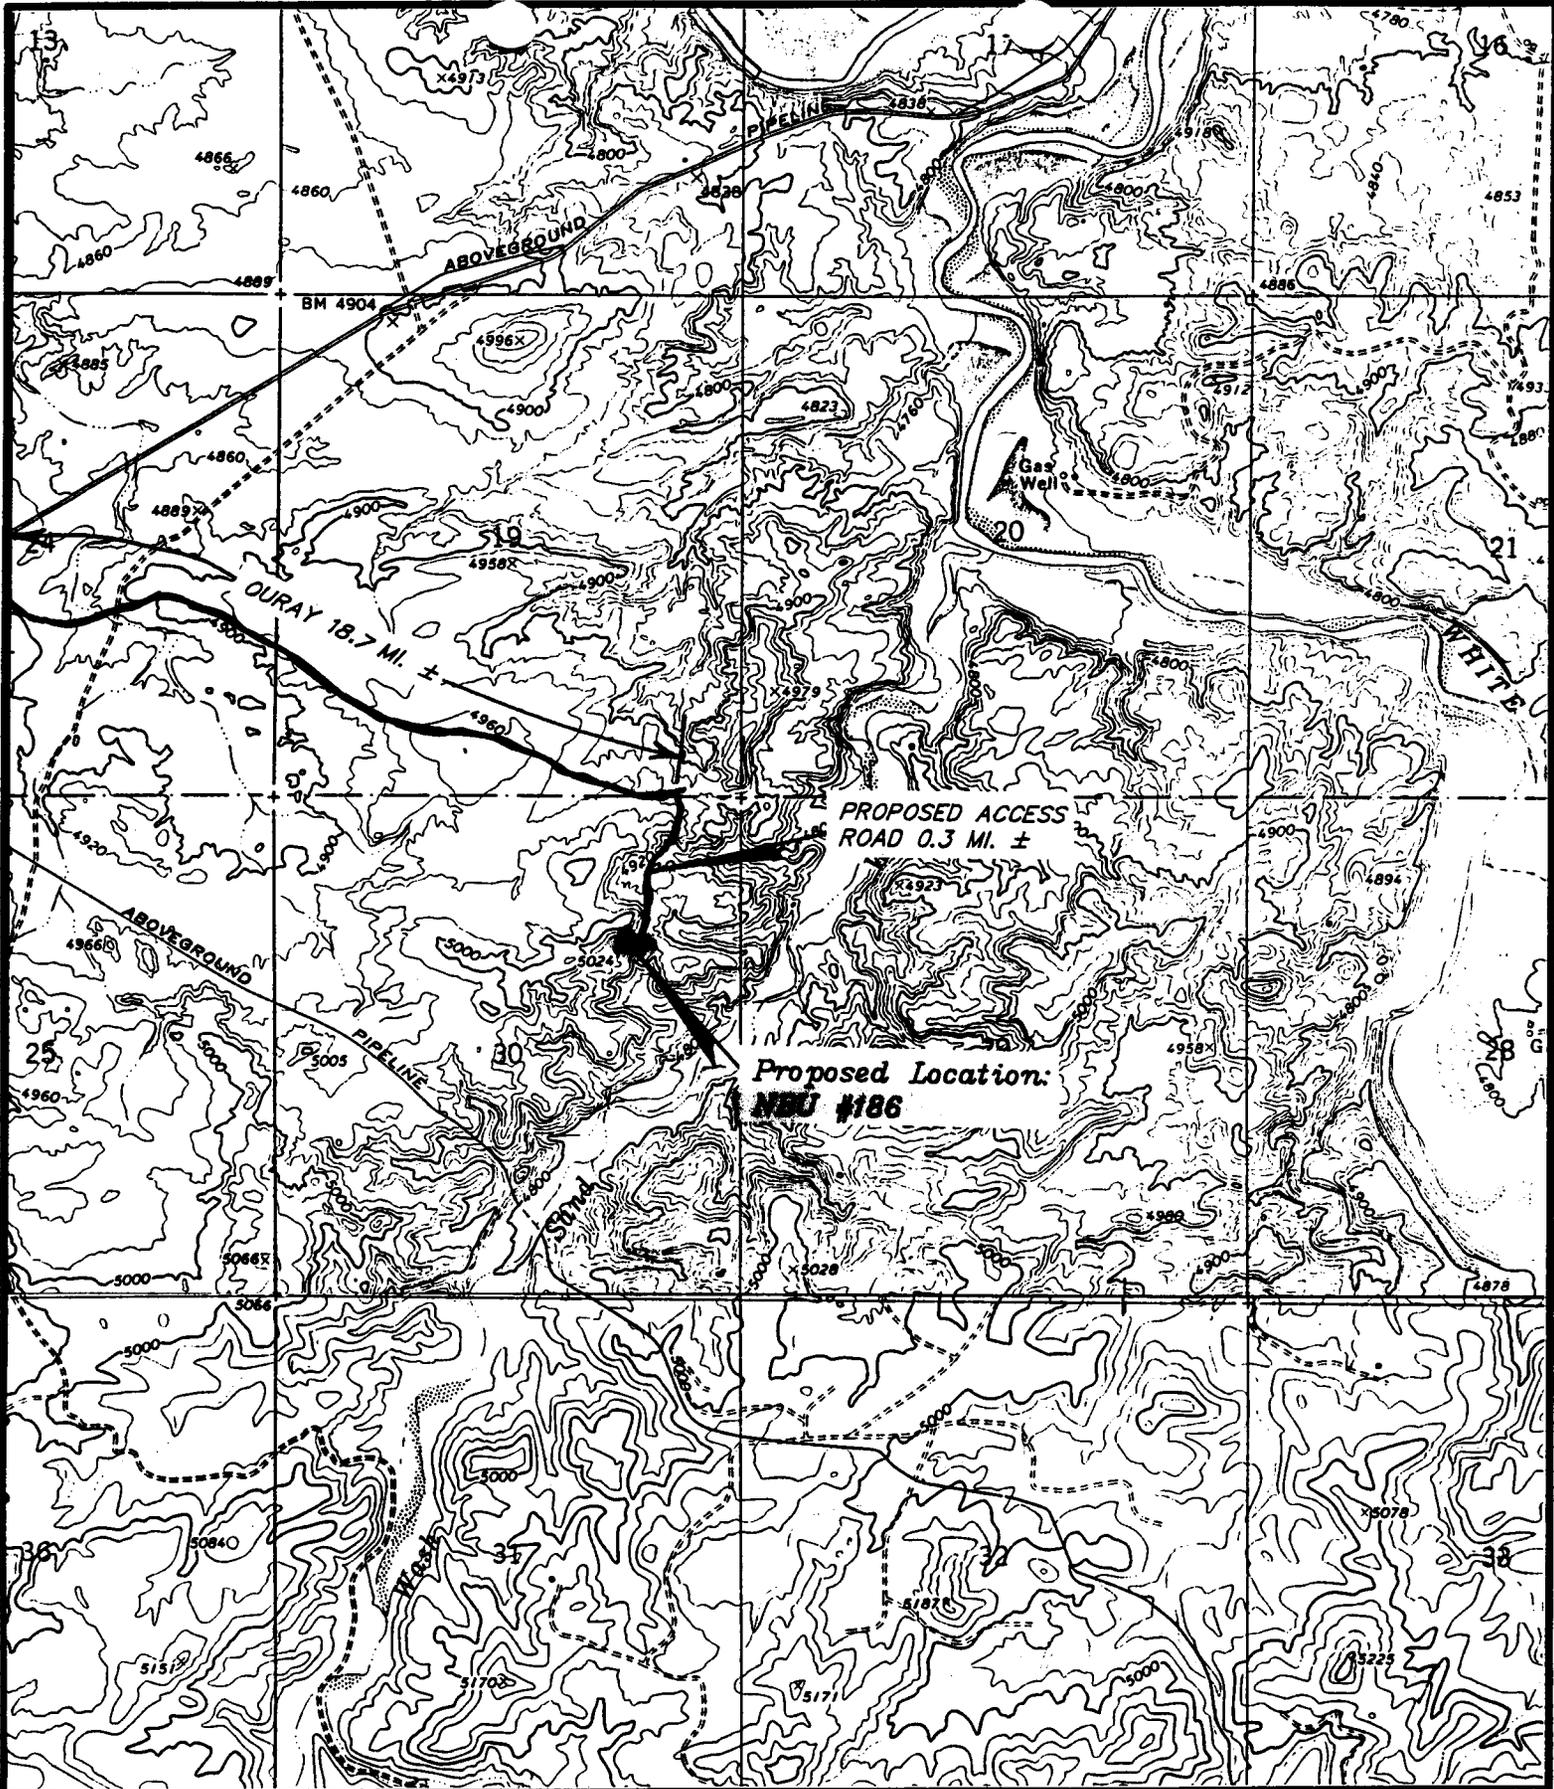

TOPOGRAPHIC  
MAP "B"  
SCALE: 1" = 2000'  
DATE 1-27-92 R.E.H.



**COASTAL OIL & GAS CORP.**  
NBU #186  
SECTION 30, T9S, R22E, S.L.B.&M.

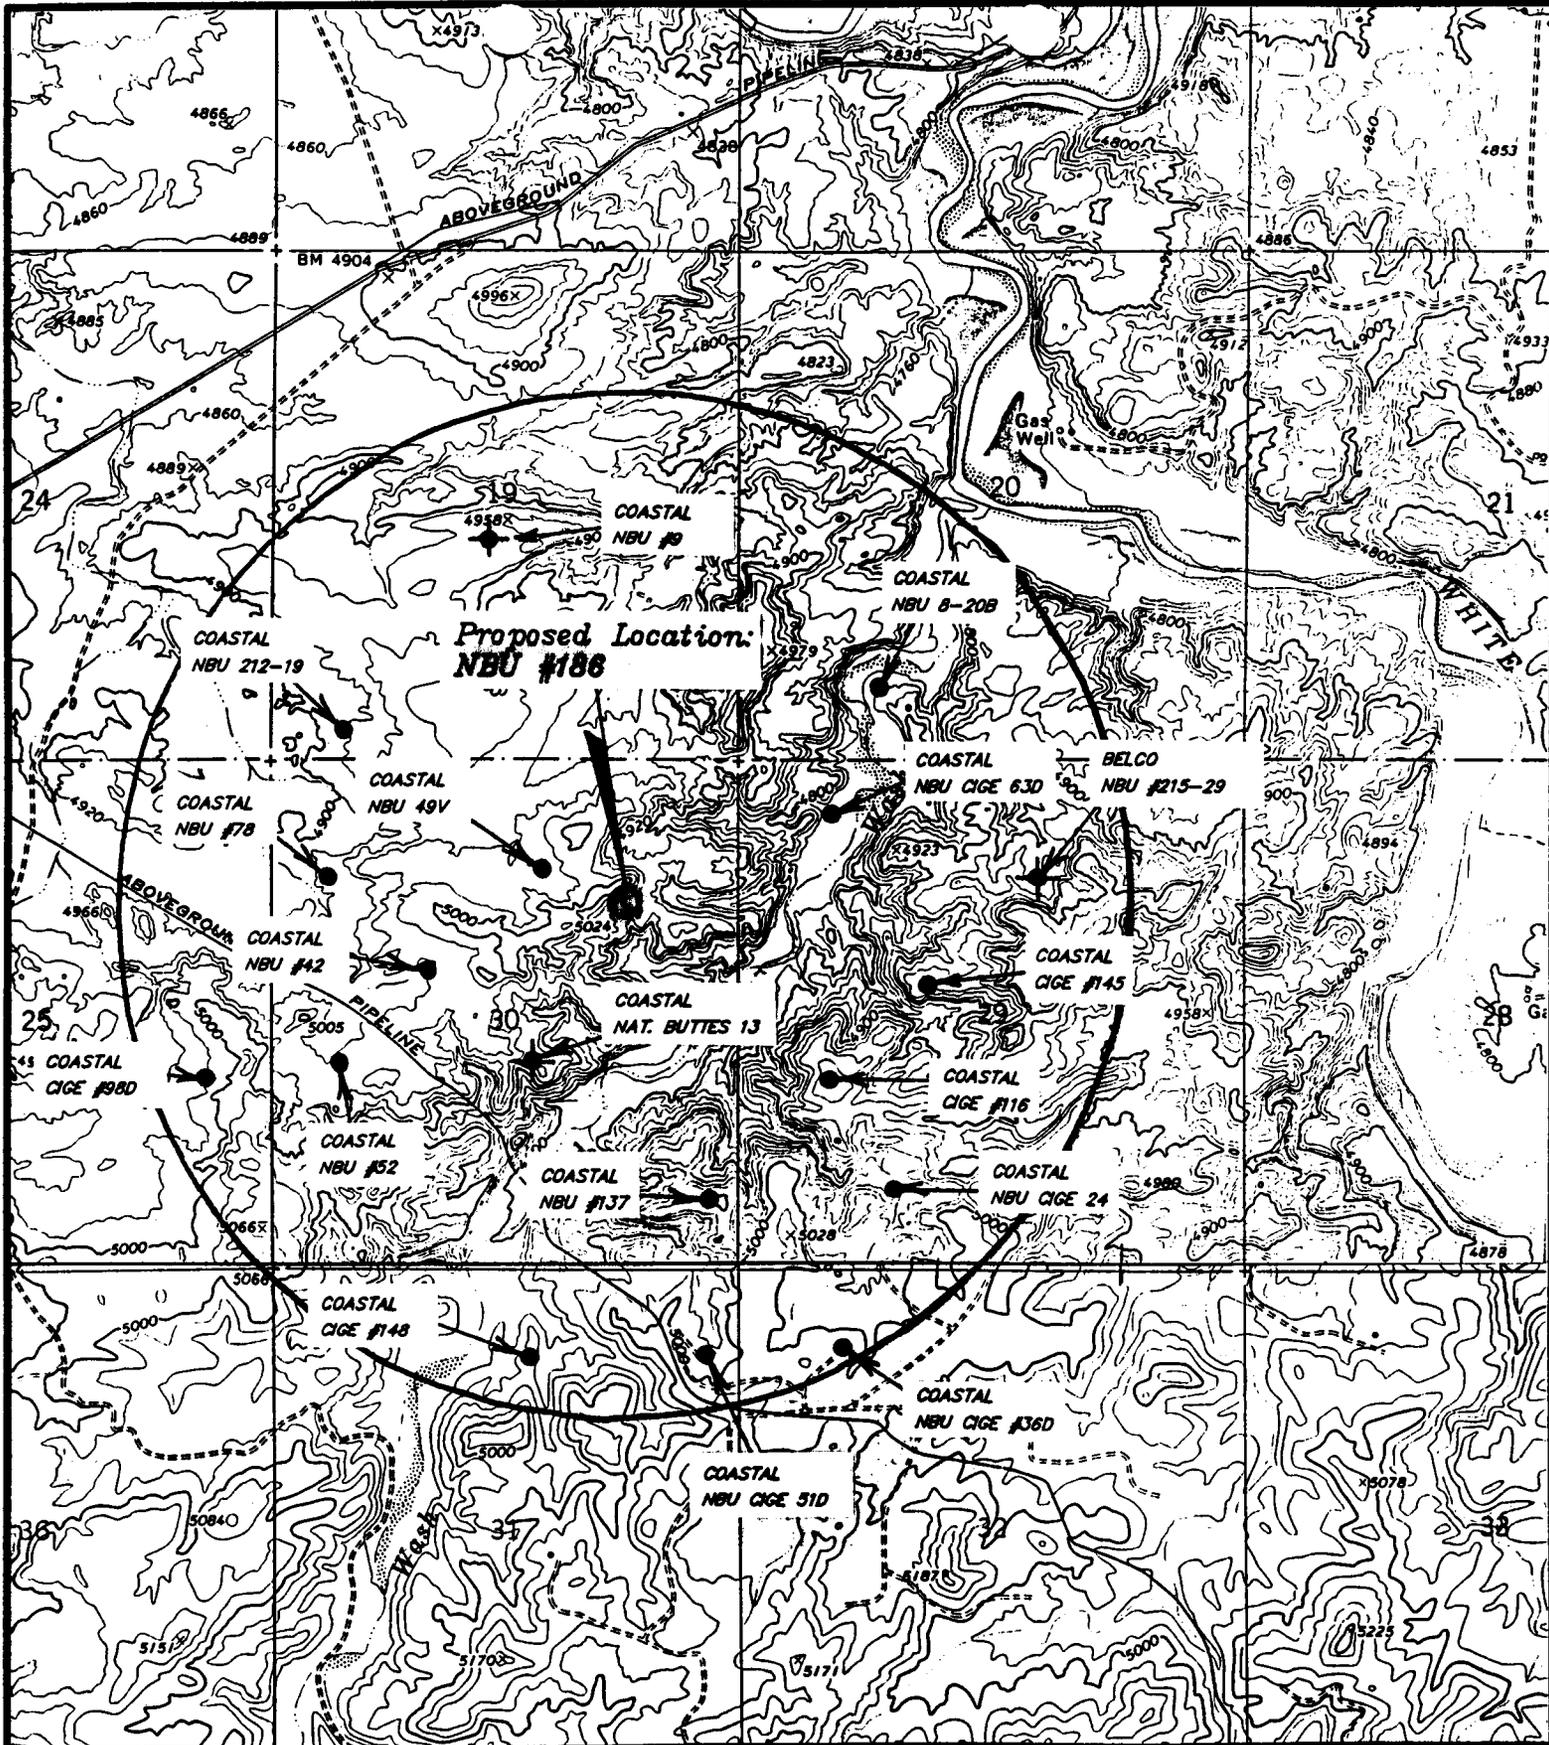

**LEGEND:**


- ⊗ = Water Wells
- = Abandoned Wells
- = Temporarily Abandoned Wells
- ⊗ = Disposal Wells
- = Drilling Wells
- = Producing Wells
- = Shut-in Wells



**COASTAL OIL & GAS CORP.**

NBU #186  
 SECTION 30, T9S, R22E, S.L.B.&M.  
 T O P O M A P " C "

DATE: 1-28-92 R.E.H.

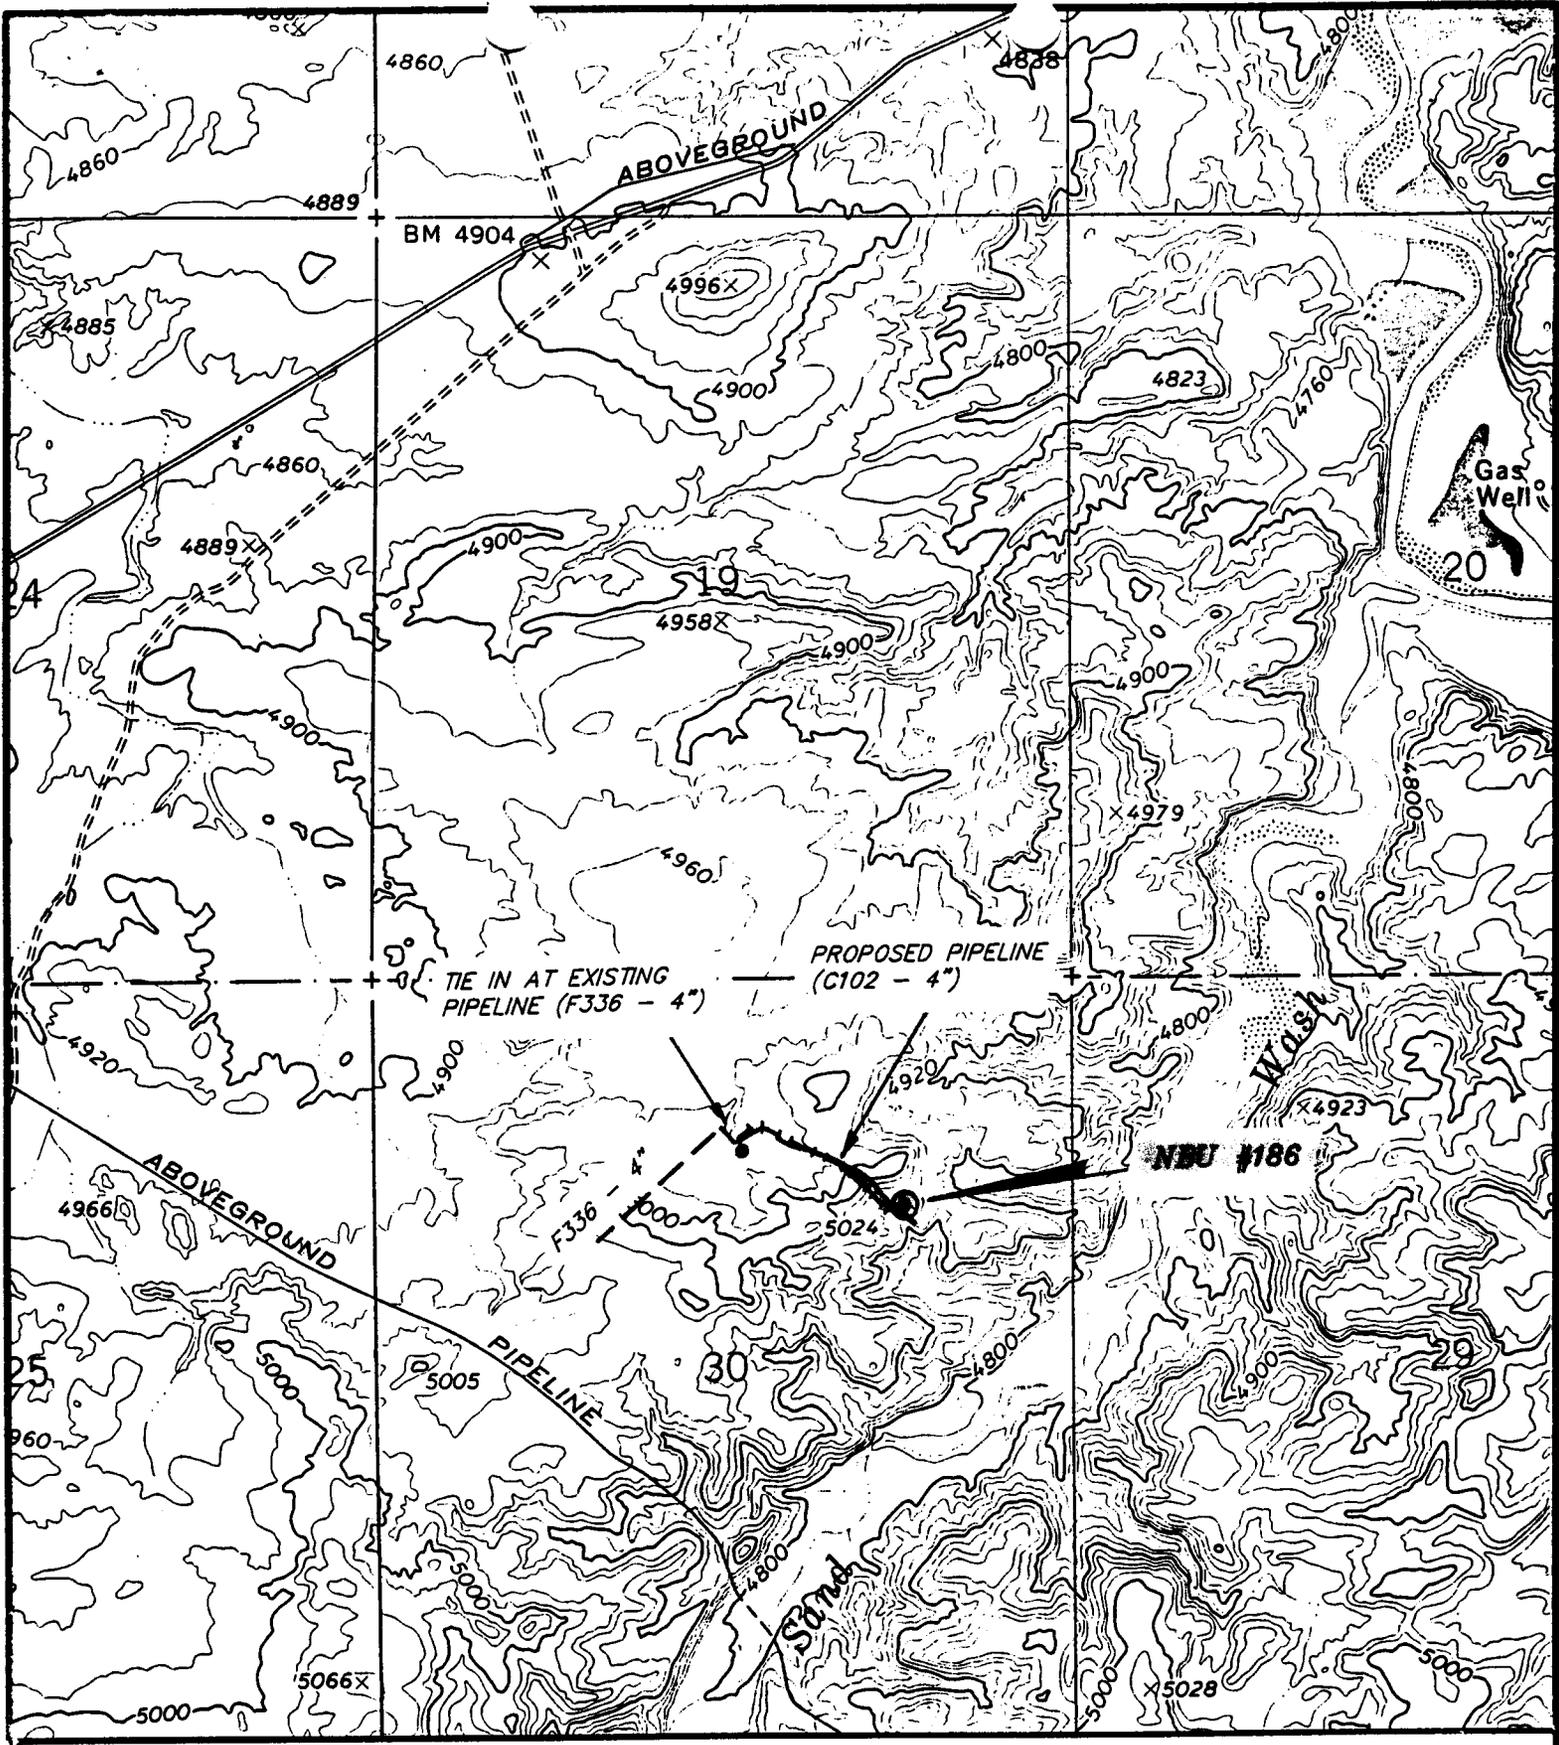

TOTAL PIPELINE SLOPE DISTANCE = 1,208'

TOPOGRAPHIC  
MAP "D"

LEGEND

- EXISTING PIPELINE
- ||||| Proposed Pipeline



**COASTAL OIL & GAS CORP.**

PROPOSED PIPELINE RIGHT-OF-WAY FOR  
NBU #186  
SECTION 30, T9S, R22E, S.L.B.&M.

DATE: 2-13-92

OPERATOR Coastal Oil & Gas Corp N-0030 DATE 3-11-90

WELL NAME NB1 1810

SEC SENE 30 T 9S R 00E COUNTY Unitah

43-047-30033  
API NUMBER

Actual (1)  
TYPE OF LEASE

CHECK OFF:

PLAT.

BOND

NEAREST WELL

LEASE

FIELD SLBM

POTASH OR OIL SHALE

PROCESSING COMMENTS:

Included in 90 POD approved 4-01-90  
Water Permit from Indian water line in Quay.  
Oil shale area

APPROVAL LETTER:

SPACING:

649-2-3  
~~R615-2-3~~

Natural Buttes  
UNIT

R615-3-2

N/A  
CAUSE NO. & DATE

R615-3-3

STIPULATIONS:

1- Oil shale area



# State of Utah

DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

Norman H. Bangerter

Governor

Dee C. Hansen

Executive Director

Dianne R. Nielson, Ph.D.

Division Director

355 West North Temple

3 Triad Center, Suite 350

Salt Lake City, Utah 84180-1203

801-538-5340

April 27, 1992

Coastal Oil and Gas Corporation  
P.O. Box 749  
Denver, Colorado 80201-0749

Gentlemen:

Re: NBU #186 Well, 1534 feet from the north line, 1136 feet from the east line, SE 1/4 NE 1/4, Section 30, Township 9 South, Range 22 East, Uintah County, Utah

Pursuant to Utah Code Ann. § 40-6-18, (1953, as amended), Utah Admin. R. 649-2-3 and Utah R. 649-3-4, approval to drill the referenced well is hereby granted.

In addition, the following specific actions are necessary to fully comply with this approval:

1. Compliance with the requirements of Utah Admin. R. 649-1 et seq., Oil and Gas Conservation General Rules.
2. Notification within 24 hours after drilling operations commence.
3. Submittal of Entity Action Form, Form 6, within five working days following commencement of drilling operations and whenever a change in operations or interests necessitates an entity status change.
4. Submittal of the Report of Water Encountered During Drilling, Form 7.
5. Prompt notification prior to commencing operations, if necessary, to plug and abandon the well. Notify Frank R. Matthews, Petroleum Engineer, (Office) (801)538-5340, (Home) (801)476-8613, or R.J. Firth, Associate Director, (Home) (801)571-6068.
6. Compliance with the requirements of Utah Admin. R. 649-3-20, Gas Flaring or Venting, if the well is completed for production.

Page 2  
Coastal Oil and Gas Corporation  
NBU #186 Well  
April 27, 1992

Prior to commencement of the proposed drilling operations, plans for facilities for disposal of sanitary wastes at the drill site should be submitted to the local health department. These drilling operations and any subsequent well operations should be conducted in accordance with applicable state and local health department regulations. A list of local health departments and copies of applicable regulations are available from the Department of Environmental Quality, Division of Drinking Water/Sanitation, telephone (801)538-6159.

This approval shall expire one year after date of issuance unless substantial and continuous operation is underway or a request for an extension is made prior to the approval expiration date. The API number assigned to this well is 43-047-32233.

Sincerely,



R.O. Firth  
Associate Director, Oil and Gas

ldc  
Enclosures  
cc: Bureau of Land Management  
J.L. Thompson  
WO11

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

RECEIVED

APR 17 1992

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

DIVISION OF  
**SUNDRY NOTICES AND REPORTS ON WELLS OIL GAS & MINING**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

**SUBMIT IN TRIPLICATE**

1. Type of Well

Oil Well  Gas Well  Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No.

P. O. Box 749 Denver, CO 80201-0749 (303) 573-4476

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

See Attached List

5. Lease Designation and Serial No.

See Attached List

6. If Indian, Allottee or Tribe Name

See Attached List

7. If Unit or CA, Agreement Designation

Natural Buttes Unit

8. Well Name and No.

See Attached List

9. API Well No.

See Attached List

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah County, Utah

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

- Notice of Intent
- Subsequent Report
- Final Abandonment Notice

- Abandonment
- Recompletion
- Plugging Back
- Casing Repair
- Altering Casing
- Other NTL 2B; IV

- Change of Plans
- New Construction
- Non-Routine Fracturing
- Water Shut-Off
- Conversion to Injection
- Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Coastal Oil & Gas Corporation hereby requests permission to dispose of produced water in unlined pits per NTL-2B, IV, for the subject wells.

- 1) These wells are completed in the Wasatch formation and produce less than 5 barrels of water per day on a monthly basis.
- 2) Two unlined pits per location will be used due to the size and layout of the locations: 40' x 40' x 8' and 6' x 6' x 6' deep with berms surrounding them. Each pit will be fenced and will have cement corner posts per BLM specifications. (See the attached typical facilities diagram.)
- 3) The average evaporation rate for the area compensated for annual rainfall is 70" per year.
- 4) The estimated percolation rate based on the soil characteristics under and adjacent to the pits is 2-6" per hour.
- 5) The depth of usable water aquifers in this area is approximately 1500'.

14. I hereby certify that the foregoing is true and correct.


Signed Eileen Danni Dey  
(This space for Federal or State office use)

Title Regulatory Analyst Date 4/14/92

**Accepted by the State**  
**of Utah Division of**  
**Oil, Gas and Mining**  
Date: 4-29-92

Approved by \_\_\_\_\_ Title \_\_\_\_\_  
Conditions of approval, if any:

COASTAL OIL & GAS CORP.  
NATURAL BUTTES UNIT  
TYPICAL FACILITIES LAYOUT  
NTL-2B; IV

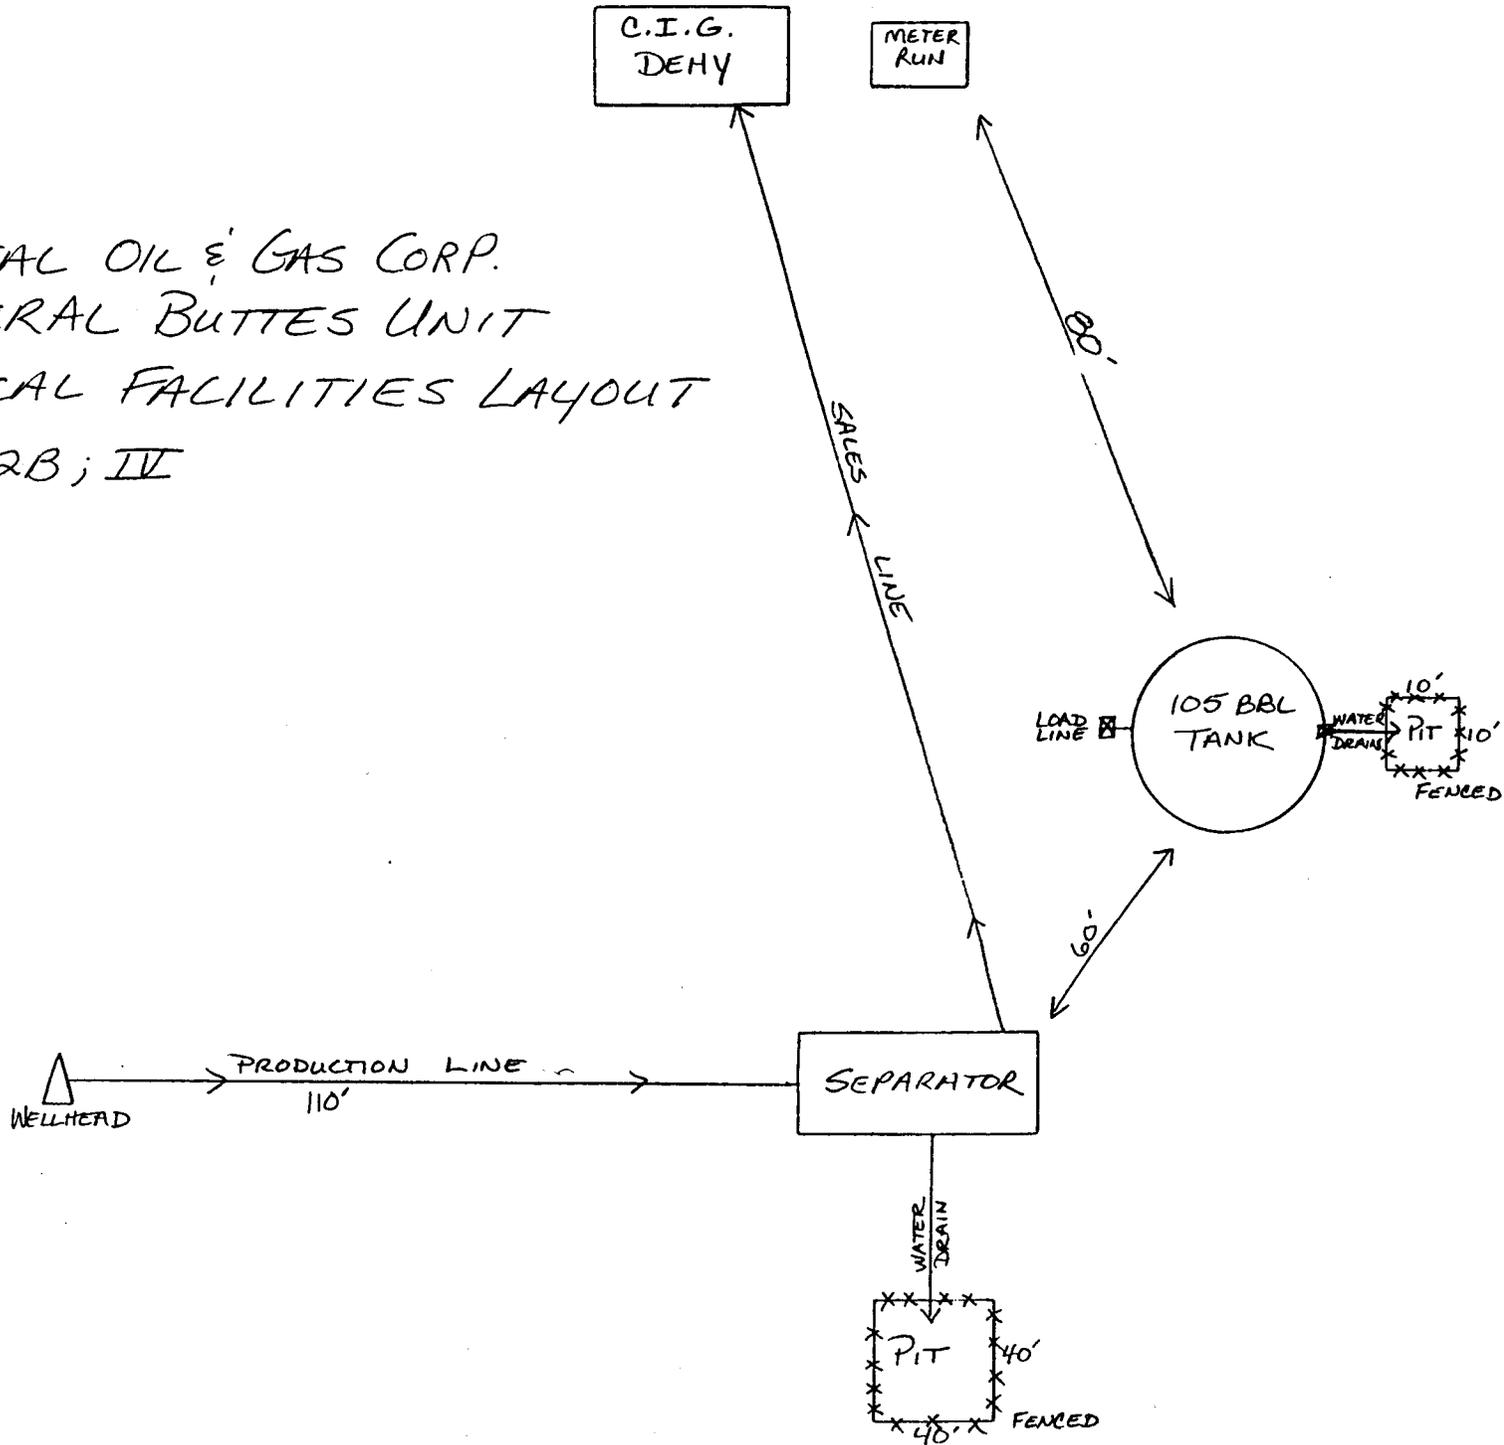

13-Apr-92

NATURAL BUTTES

UINTAH COUNTY, UTAH

WELL #	LOCATION			RGE	STATE OR BLM		API NUMBER
	QUAD	SEC	TWP		LEASE #	SURFACE	
NBU #103	SENW	10	9	21	U-0141315	UTE	43-047-31956
NBU #104	SENE	16	9	21	ST ML-3282	UTE	43-047-31957
NBU #105	SWSW	17	9	21	U-0575	UTE	43-047-31955
NBU #106	NESW	21	9	21	U-0576	UTE	43-047-31946
NBU #107	SENW	26	9	21	ST ML-01194	STATE	43-047-31916
NBU #108	SESE	19	9	22	U-0284	UTE	43-047-31958
NBU #109	SENE	27	9	21	ST U-01194-A	STATE	43-047-31917
NBU #110	NENE	28	9	21	U-0576	FED.	43-047-31924
NBU #111	SWNW	25	9	21	ST U-01194	STATE	43-047-31920
NBU #112	SESE	33	9	22	U-01191	FED.	43-047-31930
NBU #113	SESE	34	9	22	U-0149077	FED.	43-047-31931
NBU #114	SWSW	5	10	21	U-01393-D	FED.	43-047-31923
NBU #115	NENW	10	10	21	U-0149079	FED.	43-047-31929
NBU #116	NWNW	6	10	22	U-464	FED.	43-047-31925
NBU #117	NENE	10	10	22	ST UT-01197-A	STATE	43-047-31914
NBU #118	SENE	22	9	20	U-0577-B	UTE	43-047-31969
NBU #119	SENW	22	9	20	U-0577-B	UTE	43-047-31973
NBU #120	NWNW	10	9	21	U-0141315	UTE	43-047-31972
NBU #121	NWNE	13	9	21	U-01193	UTE	43-047-
NBU #122	SWSE	13	9	21	U-01193	UTE	43-047-32085
NBU #123	NWNW	15	9	21	U-01188	UTE	43-047-31974
NBU #124	NWNE	16	9	21	ST ML-3282	UTE	43-047-31971
NBU #125	NESE	17	9	21	U-0575	UTE	43-047-32090
NBU #126	NENW	21	9	21	U-0576	UTE	43-047-31962
NBU #127	SWNW	21	9	21	U-0576	UTE	43-047-31963
NBU #128	SWSW	21	9	21	U-0576	UTE	43-047-31964
NBU #129	SENE	22	9	21	U-010950-A	UTE	43-047-31965
NBU #130	SWNW	22	9	21	U-0147566	UTE	43-047-31967
NBU #131	NWSW	23	9	21	U-0149075	UTE	43-047-31966
NBU #132	NWNW	26	9	21	ST U-01194	STATE	43-047-31938
NBU #133	SWNE	28	9	21	U-0576	FED.	43-047-31950
NBU #134	SWSW	28	9	21	U-0576	FED.	43-047-32011
NBU #135	NESE	18	9	22	U-461	UTE	43-047-32089
NBU #136	SWSE	19	9	22	U-0284	UTE	43-047-31968
NBU #137	SESE	30	9	22	ST ML-22935	STATE	43-047-31939
NBU #138A	SENE	33	9	22	U-01191-A	FED.	43-047-32151
NBU #139	SWNE	14	10	21	U-465	FED.	43-047-31948
NBU #140	NWNE	5	10	22	U-01191A	FED.	43-047-31947
NBU #141	SENW	6	10	22	U-464	FED.	43-047-32017
NBU #142	NESE	10	10	22	U-025187	FED.	43-047-32013
NBU #143	NWNE	10	9	21	U-0141315	UTE	43-047-32088
NBU #144	NWNW	23	9	21	U-0149075	UTE	43-047-32044
NBU #145	NWNE	27	9	21	ST U-01194-A	STATE	43-047-31976
NBU #146	SWNW	14	10	21	U-465	FED.	43-047-31985
NBU #147	NWSW	4	10	22	U-01191	FED.	43-047-31984
NBU #148	SESW	4	10	22	U-01191	FED.	43-047-31983
NBU #149	NESE	5	10	22	U-01191	FED.	43-047-31982
NBU #150	SENW	9	10	22	U-01196-B	FED.	43-047-31992
NBU #151	NWNW	9	10	22	U-01196-B	FED.	43-047-31991
NBU #152	SESE	9	10	22	U-01196-D	FED.	43-047-31990
NBU #153	SWNW	11	10	22	ST U-01197-A	STATE	43-047-31975
NBU #154	NWSE	26	9	21	ST ML-22934	STATE	43-047-32003
NBU #155	SENW	31	9	22	ST ML-23607	STATE	43-047-32004
NBU #156	SWNW	35	9	21	ST U-01194	STATE	43-047-32005
NBU #157	SESW	32	9	22	ST ML-22649	STATE	43-047-32007
NBU #158	NWSE	27	9	21	ST U-01194-A	STATE	43-047-31997
NBU #159	NESW	35	9	21	ST U-01194	STATE	43-047-31996
NBU #160	SESW	31	9	22	ST ML-22935-A	STATE	43-047-32006
NBU #161	SESE	32	9	22	ST ML-22649	STATE	43-047-32023
NBU #162	SENW	12	10	20	U-4478	FED.	43-047-32066
NBU #163	NENW	14	10	21	U-465	FED.	43-047-32069
NBU #164	NWSE	3	10	22	U-01191-A	FED.	43-047-32055
NBU #165	NENW	3	10	22	U-01191	FED.	43-047-32057
NBU #166	SWSE	28	9	21	U-0576	FED.	43-047-32065
NBU #167	SESW	25	9	21	ST U-01194	STATE	43-047-32054
NBU #168	NWSW	12	10	20	U-4478	FED.	43-047-32117
NBU #169	SESW	12	10	20	U-4478	FED.	43-047-32118

13-Apr-92

NATURAL BUTTES

UINTAH COUNTY, UTAH

WELL #	LOCATION			RGE	STATE OR BLM		API NUMBER
	QUAD	SEC	TWP		LEASE #	SURFACE	
NBU #170	NWNW	4	10	22	U-01191-A	FED.	43-047-32169
NBU #171	SENE	5	10	22	U-01191-A	FED.	43-047-32115
NBU #172	NENE	19	9	22	U-0284	UTE	43-047-32194
NBU #173	NWNE	33	9	22	U-01191-A	FED.	43-047-32116
NBU #174	NWNW	11	9	21	U-0141315	UTE	43-047-32193
NBU #175	NENW	28	9	21	U-0576	FED.	43-047-32143
NBU #176	SWNW	28	9	21	U-0576	FED.	43-047-32144
NBU #177	NESE	29	9	21	U-0581	FED.	43-047-32112
NBU #178	NWNE	30	9	21	U-0581	FED.	43-047-32121
NBU #179	SWSW	10	10	21	U-01416-A	FED.	43-047-32145
NBU #180	SWSE	10	10	22	U-025187	FED.	43-047-32113
NBU #181	SESW	9	9	21	U-0576	UTE	43-047-32161
NBU #182	SENW	11	9	21	U-0141315	UTE	43-047-32162
NBU #183 ✓	SWNW	27	9	21	ST U-01194-A	STATE	43-047-32122
NBU #184	SESW	30	9	22	U-463	FED.	43-047-32170
NBU #185	SWNE	3	10	22	U-01191-A	FED.	43-047-32171
NBU #186	SENE	30	9	22	U-463	FED.	43-047-
NBU #187	SESW	34	9	22	U-0149077	FED.	43-047-
NBU #188	SWSW	10	10	22	U-01196-C	FED.	43-047-
NBU #189	SESW	23	9	21	U-0149075	UTE	43-047-
NBU #190 ✓	NWNE	26	9	21	ST U-01194	STATE	43-047-
CIGE 110-7-9-21	SWSE	7	9	21	U-0575-B	UTE	43-047-31959
CIGE 111-13-9-21	SESW	13	9	21	U-01193	UTE	43-047-31954
CIGE 112-19-9-21	SESE	19	9	21	U-0581	UTE	43-047-31945
CIGE 113-21-9-21	SWNE	21	9	21	U-0576	UTE	43-047-31944
CIGE 114-34-9-21 ✓	NESE	34	9	21	ST U-01194-A	STATE	43-047-31915
CIGE 115-35-9-21 ✓	NWNE	35	9	21	ST ML-22582	STATE	43-047-31918
CIGE 116-29-9-22 ✓	NWSW	29	9	22	ST ML-22935	STATE	43-047-31919
CIGE 117-34-9-22	SWNW	34	9	22	U-0149077	FED.	43-047-31928
CIGE 118-35-9-22	NESE	35	9	22	U-010954A	FED.	43-047-32025
CIGE 119-15-10-21	NENE	15	10	21	U-01416-A	FED.	43-047-31927
CIGE 120-15-9-20	SENE	15	9	20	U-0144868	UTE	43-047-32032
CIGE 121-15-9-20	NWNE	15	9	20	U-0144868	UTE	43-047-32031
CIGE 122-7-9-21	NENE	7	9	21	U-0149767	UTE	43-047-32098
CIGE 123-7-9-21	SWNE	7	9	21	U-0575-B	UTE	43-047-32047
CIGE 124-9-9-21	NWSE	9	9	21	U-01188	UTE	43-047-32045
CIGE 125-13-9-21	NWNW	13	9	21	U-01193	UTE	43-047-32084
CIGE 126-13-9-21	NWSW	13	9	21	U-01193	UTE	43-047-32087
CIGE 127-16-9-21	NESW	16	9	21	ST ML-3141	UTE	43-047-32036
CIGE 128-18-9-21	NENE	18	9	21	U-0575	UTE	43-047-32046
CIGE 129-18-9-21	NENW	18	9	21	U-0581	UTE	43-047-32043
CIGE 130-19-9-21	NENE	19	9	21	U-0581	UTE	43-047-32030
CIGE 131-19-9-21	SWNE	19	9	21	U-0581	UTE	43-047-32029
CIGE 132-20-9-21	NWSW	20	9	21	U-0575	UTE	43-047-32028
CIGE 133-35-9-21 ✓	SWSE	35	9	21	ST ML-22582	STATE	43-047-31978
CIGE 134-1-10-20	SWSW	1	10	20	U-02270-A	FED.	43-047-31989
CIGE 135-3-10-21	SWSW	3	10	21	U-0149078	FED.	43-047-32001
CIGE 136-4-10-21 ✓	SWNE	4	10	21	ST ML-22940	STATE	43-047-31979
CIGE 137-6-10-21	SENE	6	10	21	U-01791	FED.	43-047-31988
CIGE 138A-6-10-21	SENW	6	10	21	U-01791	FED.	43-047-31987
CIGE 139-10-10-21	SWNE	10	10	21	U-0149079	FED.	43-047-31986
CIGE 140-16-10-21 ✓	NENE	16	10	21	ST ML-10755	STATE	43-047-31977
CIGE 141-7-10-22 ✓	NWNE	7	10	22	ST ML-23609	STATE	43-047-31970
CIGE 142-25-9-21 ✓	SENE	25	9	21	ST U-01189	STATE	43-047-31994
CIGE 143-34-9-21 ✓	SWNE	34	9	21	ST U-01194-A	STATE	43-047-31995
CIGE 144-2-10-22 ✓	SWNE	2	10	22	ST ML-22651	STATE	43-047-32022
CIGE 145-29-9-22 ✓	SENW	29	9	22	ST ML-22935	STATE	43-047-31993
CIGE 146-16-10-21 ✓	NWNE	16	10	21	ST ML-10755	STATE	43-047-32021
CIGE 147-36-9-22 ✓	SESW	36	9	22	ST ML-22650	STATE	43-047-32020
CIGE 148-31-9-22 ✓	NWNE	31	9	22	ST ML-22935-A	STATE	43-047-32024
CIGE 149-8-10-21	NWNE	8	10	21	U-01791	FED.	43-047-32056
CIGE 150-9-10-21	SWNE	9	10	21	U-01416	FED.	43-047-32058
CIGE 151-10-10-21	SWSE	10	10	21	U-0149079	FED.	43-047-32059
CIGE 152-33-9-22	SESW	33	9	22	U-01191-A	FED.	43-047-32068
CIGE 153-35-9-22	SESW	35	9	22	U-010954-A	FED.	43-047-32067
CIGE 154-13-10-20	NWNW	13	10	20	U-4485	STATE	43-047-32119
CIGE 155-9-9-21	SENE	9	9	21	U-01188-B	UTE	43-047-32157

13-Apr-92

NATURAL BUTTES

UINTAH COUNTY, UTAH

WELL #	LOCATION				STATE OR BLM		API NUMBER
	QUAD	SEC	TWP	RGE	LEASE #	SURFACE	
CIGE 156-16-9-21	NESE	16	9	21	ST ML-3282	UTE	43-047-32195
CIGE 157-16-9-21	SWNW	16	9	21	U-38409	UTE	43-047-32160
CIGE 158-21-9-21	NESE	21	9	21	U-0576	UTE	43-047-32158
CIGE 159-6-10-21	NWNE	6	10	21	U-01791	FED.	43-047-32120
CIGE 160-14-10-21	SWSE	14	10	21	U-01393-C	FED.	43-047-32124
CIGE 161-2-10-22	SESE	2	10	22	ST ML-22651	STATE	43-047-32168
CIGE 162-36-9-22	SESE	36	9	22	ST ML-22650	STATE	43-047-32164
CIGE 163-15-9-21	SENE	15	9	21	U-01193	UTE	43-047-32192
CIGE 164-34-9-22	NWNE	34	9	22	U-0149077	FED.	43-047-32141
CIGE 165-1-10-20	SWNW	1	10	20	U-02270-A	FED.	43-047-32114
CIGE 166-3-10-21	NENW	3	10	21	U-0149078	FED.	43-047-32172
CIGE 167-7-10-21	NENE	7	10	21	U-01791	FED.	43-047-32142
CIGE 168-16-10-21	NWSE	16	10	21	ST ML-10755	STATE	43-047-32123
CIGE 169-2-10-21	SENE	2	10	21	ST ML-22652	STATE	43-047-

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

5. Lease Designation and Serial No.

U-463

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA, Agreement Designation

Natural Buttes Unit

8. Well Name and No.

NBU #186

9. API Well No.

43-047-32233

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah County, Utah

**SUBMIT IN TRIPLICATE**

1. Type of Well

Oil Well  Gas Well  Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No

P. O. Box 749 Denver, CO 80201-0749 (303) 573-4476

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1136' FEL & 1534' FNL  
Section 30, T9S-R22E

**CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION

- Notice of Intent
- Subsequent Report
- Final Abandonment Notice

TYPE OF ACTION

- Abandonment
- Recompletion
- Plugging Back
- Casing Repair
- Altering Casing
- Other
- Change of Plans
- New Construction
- Non-Routine Fracturing
- Water Shut-Off
- Conversion to Injection
- Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Coastal Oil & Gas Corporation requests a variance to the existing rules and regulations requiring the blooie line to be not less than 100 feet from the borehole.

This well is being drilled with air mist injecting water at a rate of 15-20 gpm until they reach the lost circulation zone. Then the rig pumps are utilized using aerated water at the rate of 190 gpm to total depth.

ACCEPTED BY THE STATE  
OIL, GAS, AND MINING

RECEIVED

DATE: 5-6-92 MAY 06 1992

BY: [Signature] DIVISION OF OIL GAS & MINING

14. I hereby certify that the foregoing is true and correct

Signed: [Signature] Title: Regulatory Analyst

Date: 5/5/92

(This space for Federal or State office use)

Approved by: \_\_\_\_\_ Title: \_\_\_\_\_ Date: \_\_\_\_\_  
Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*See instruction on Reverse Side

DOGMA

Form 3160-3  
(November 1983)  
(Formerly 9-331C)

SUBMIT IN TR. DATE  
(Other instructions on  
reverse side)

Form approved.  
Budget Bureau No. 1004-0136  
Expires August 31, 1985

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK

DRILL

DEEPEN

PLUG BACK

b. TYPE OF WELL

OIL WELL

GAS WELL

OTHER

SINGLE ZONE

MULTIPLE ZONE

2. NAME OF OPERATOR

Coastal Oil & Gas Corporation

3. ADDRESS OF OPERATOR

P. O. Box 749 Denver, CO 80201-0749 (303) 573-4476

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)

At surface 1136' FEL & 1534' FNL

At proposed prod. zone Same as above.

RECEIVED

13-017-32233 MAY 11 1992

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE\*

Approximately 19 miles SE of Ouray, Utah.

DIVISION OF

15. DISTANCE FROM PROPOSED\* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drig. unit line, if any)

1136'

16. NO. OF ACRES IN LEASE 551.44

17. NO. OF ACRES ASSIGNED TO THIS WELL 80

18. DISTANCE FROM PROPOSED LOCATION\* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT.

1000'

19. PROPOSED DEPTH 6225'

20. ROTARY OR CABLE TOOLS Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

4942' Ungraded Ground

22. APPROX. DATE WORK WILL START\*

4/1/92

23.

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12-1/4"	8-5/8"	24#	250'	180 sx circulated to surface*
7-7/8"	5-1/2"	17#	6225'	1000 sx circulated to surface*

\* Cement volumes may change due to hole size. Calculate from caliper log.

See Eight Point Resource Protection Plan Attached

I hereby certify that Coastal Oil & Gas Corp. is authorized by the proper lease interest owners to conduct lease operations associated with this Application for Permit to Drill the NBU #186, Federal Lease #U-463. Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by Coastal Oil & Gas Corp, Nationwide Oil & Gas Bond #CO-0018, who will be responsible for compliance with all the terms and conditions of that portion of the lease associated with this application.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED Eileen Danni Day TITLE Regulatory Analyst DATE 3/2/92

PERMIT NO. \_\_\_\_\_ APPROVAL DATE APR 20 1992  
APPROVED BY [Signature] TITLE ASSISTANT DISTRICT MANAGER MINERALS

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED TO OPERATOR'S COPY

\*See Instructions On Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UT 080-2M100

Revised November 1990

Date NOS Received 01/30/92

**RECEIVED**

MAY 11 1992

CONDITIONS OF APPROVAL  
APPLICATION FOR PERMIT TO DRILL

DIVISION OF  
OIL GAS & MINING

Company/Operator COASTAL OIL & GAS CORPORATION  
Well Name & Number NBU 186  
Lease Number U-463  
Location SENE Sec. 30 T. 9S R. 22E  
Surface Ownership BLM

NOTIFICATION REQUIREMENTS

- Location Construction - at least forty-eight (48) hours prior to construction of location and access roads.
- Location Completion - prior to moving on the drilling rig.
- Spud Notice - at least twenty-four (24) hours prior to spudding the well.
- Casing String and Cementing - at least twenty-four (24) hours prior to running casing and cementing all casing strings.
- BOP and Related Equipment Tests - at least twenty-four (24) hours prior to initiating pressure tests.
- First Production Notice - within five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

B. THIRTEEN POINT SURFACE USE PROGRAM:

1. Location of Existing and/or Proposed Facilities

Surface Pipeline Conditions of Approval:

- A. No blading will be allowed on surface pipelines.
- B. No pipeline construction will be allowed when soils are muddy and rutting of soils becomes apparent from the use of vehicles. If rutting occurs, operations must cease until soils are dry or frozen.
- C. Vehicle use will be restricted to the pipeline route.
- D. The Book Cliffs Resource Area minerals staff will be notified twenty-four (24) hours prior to starting construction.
- E. All gravel terraces and sandy areas, whether wet or dry, will be avoided to protect subsurface archaeological resources.
- F. All surface lines will be either black or brown in color.
- G. Seeding may be required if surface damage is done during the pipeline construction.
- H. If any cultural resources are found during construction, all work will stop and the Vernal District BLM office notified.
- I. The pipe will be welded on the well location or other areas devoid of vegetation and the pipe dragged along the surface to the connection point with a CAT, backhoe, or grader.
- J. The metering of all gas will be done in accordance with On Shore Order No. 5

2. Methods for Handling Waste Disposal

The reserve pit shall be lined with a plastic nylon reinforced liner. It will be a minimum of 10 mil thickness with sufficient bedding (either straw or dirt) to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash, scrap pipe, etc., that could puncture the liner will be disposed of in the pit. More stringent protective requirements may be deemed necessary by the A.O.

3. Fencing Requirements

A cattleguard with an adjacent 16 foot gate shall be installed in the fence where the road passes through. If the well is a producer, the cattleguard shall be permanently mounted on concrete bases and a drainage ditch should be installed to allow any water to drain out of the cattleguard.

CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Company Coastal Oil and Gas Corporation Well No. NBU 186

Location SENE, Section 30, T9S, R22E Lease No. U - 463

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to Tim Ingwell of this office. Copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

2. Pressure Control Equipment

Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint.

As a minimum, the usable water and oil shale resources shall be isolated and/or protected by having a cement top for the production casing at least 200 ft. above the top of the Mahogany oil shale, identified at  $\pm$  2,270 ft. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the AO. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vapor-proof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the AO.

A cement bond log (CBL) shall be utilized to determine the top of cement (TOC) and bond quality for the production casing.

6. Notification of Operations

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the AO.

Gas meter runs for each well will be located within 500 feet of the wellhead. The gas flowline will be buried or anchored down from the wellhead to the meter and 500 feet downstream of the meter run or any production facilities. Meter runs will be housed and/or fenced.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries. Tests for meter accuracy will be conducted monthly for the first three months on new meter installations and at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, please contact one of the following individuals:

Gerald E. Kenczka (801) 781-1190  
Petroleum Engineer

Ed Forsman (801) 789-7077  
Petroleum Engineer

BLM FAX Machine (801) 789-3634

## EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spend solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids.

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

NAME OF COMPANY: COASTAL 43-047-32233

WELL NAME: NBU 186

Section 30 Township 9S Range 22E County UINTAH

Drilling Contractor COASTAL

Rig # 2

SPUDDED: Date 6-5-92

Time 11:00 AM

How DRY HOLE

Drilling will commence \_\_\_\_\_

Reported by DOUG W/LEON ROSS

Telephone # 1-722-4469

Date 6-5-92 SIGNED CAK

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

5. Lease Designation and Serial No.

U-463

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA, Agreement Designation

Natural Buttes Unit

8. Well Name and No.

NBU #186

9. API Well No.

43-047-32233

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah County, Utah

**SUBMIT IN TRIPLICATE**

1. Type of Well

Oil Well  Gas Well  Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No

P.O. Box 749 Denver, CO 80201-0749 (303) 573-4476

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1136' FEL and 1534' FNL  
Section 30, T9S, R22E

**CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION

Notice of Intent  
 Subsequent Report  
 Final Abandonment Notice

TYPE OF ACTION

Abandonment  
 Recompletion  
 Plugging Back  
 Casing Repair  
 Altering Casing  
 Other Report of Spud  
 Change of Plans  
 New Construction  
 Non-Routine Fracturing  
 Water Shut-Off  
 Conversion to Injection  
 Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

MIRU Leon Ross Drilling. Spud surface hole @ 11:00 AM, 6/5/92. Drld 12-1/4" hole to 262' GL. Ran 6 jts 8-5/8" 24# K55 ST&C csg & set @ 270' KB. Cmt'd w/150 sx Class "G" + add cement.

**RECEIVED**

JUN 15 1992

DIVISION OF  
OIL GAS & MINING

14. I hereby certify that the foregoing is true and correct

Signed [Signature] Title Regulatory Analyst Date 6/10/92

(This space for Federal or State office use)

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_  
Conditions of approval, if any: \_\_\_\_\_

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

OPERATOR Coastal Oil & Gas Corporation  
ADDRESS P.O. Box 749  
Denver, CO 80201-0749

OPERATOR ACCT. NO. N 0230

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
B	2900	→	43-047-32233	NBU #186	SENE	30	9S	22E	Uintah	6/5/92	6/5/92
WELL 1 COMMENTS: Entity added 6-17-92. JLP											
WELL 2 COMMENTS:											
WELL 3 COMMENTS:											
WELL 4 COMMENTS:											
WELL 5 COMMENTS:											

- ACTION CODES** (See instructions on back of form)  
 A - Establish new entity for new well (single well only)  
 B - Add new well to existing entity (group or unit well)  
 C - Re-assign well from one existing entity to another existing entity  
 D - Re-assign well from one existing entity to a new entity  
 E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

(3/89)

**RECEIVED**

JUN 15 1992

DIVISION OF  
OIL GAS & MINING

*Eileen Danni Dey*  
Signature Eileen Danni Dey

Regulatory Analyst 6/10/92

Title Date

Phone No. (303) 573-4476

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

5. Lease Designation and Serial No.

U-463

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA, Agreement Designation

Natural Buttes Unit

8. Well Name and No.

NBU #186

9. API Well No.

43-047-32233

10. Field and Pool, or Exploratory Area

Natural Buttes

11. County or Parish, State

Uintah County, UT

**SUBMIT IN TRIPLICATE**

1. Type of Well

Oil Well  Gas Well  Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No.

P.O. Box 749 Denver, CO 80201-0749 (303) 573-4476

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1136' FEL and 1534' FNL  
Section 30, T9S, R22E

**CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION

Notice of Intent  
 Subsequent Report  
 Final Abandonment Notice

TYPE OF ACTION

Abandonment  
 Recompletion  
 Plugging Back  
 Casing Repair  
 Altering Casing  
 Other Report of Operations

Change of Plans  
 New Construction  
 Non-Routine Fracturing  
 Water Shut-Off  
 Conversion to Injection  
 Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Please see the attached chronological history for the drilling operations performed on the above-referenced well.

**RECEIVED**

JUL 16 1992

DIVISION OF  
OIL GAS & MINING

14. I hereby certify that the foregoing is true and correct

Signed William Dennis Day Title Regulatory Analyst Date 7/13/92

(This space for Federal or State office use)

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_  
Conditions of approval, if any: \_\_\_\_\_

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*See instruction on Reverse Side

COASTAL OIL & GAS CORPORATION  
CHRONOLOGICAL HISTORY

NBU #186  
NATURAL BUTTES UNIT  
UINTAH COUNTY, UTAH  
COASTALDRIL #2  
WI: 100% COGC AFE:  
ATD: 6225' (WASATCH) SD: 7/2/92  
CSG: 8-5/8" @ 270'  
DHC(M\$): 177.2

6/9/92 270' WORT. Drill 12-1/4" surf hole (spud @ 11:00 a.m., 6/5/92) to 262' GL w/Leon Ross Drlg and run 6 jts 8-5/8" 24# K-55 ST&C (tally 260.68'). Set at 270' KB. RU Halliburton and pump 150 sx C1 G w/2% CaCl<sub>2</sub> and 1/4#/sx Flocele. Displace w/14-3/4 bbls FW and circ 8.5 bbls cmt to surf. CC: \$31,612.

7/2/92 270' PU BHA. RD, MI RURT CD #2. NU BOPE. Test to 2000 psi, hydril and csg to 1500 psi. PU BHA. CC: \$62,084.

7/3/92 1710' Drlg 1440'/21 hrs. PU BHA, tag cmt at 245'. Drill cmt and shoe. Spud well at 8:00 a.m., 7/2/92. Drlg, svys: 3/4 deg @ 504'; 1 deg @ 1531'. Air mist, 1400 CFM at 300 psi. CC: \$70,427.

7/4/92 2980' Drlg 1270'/23 hrs. Drlg, svy, RS, chk BOP. Drlg, svy: 1-1/2 deg @ 2055'; 1-1/4 deg @ 2590'. Aerated wtr, CFM 1400. CC: \$77,868.

7/5/92 4280' Drlg 1300'/23.5 hrs. Drlg, svy, RS and chk BOP. Drlg w/aerated wtr. CFM 1400. Svy: 1-1/2 deg @ 3033'. Aerated wtr, CFM 1400. CC: \$85,060.

7/6/92 5100' Drlg 820'/18.5 hrs. Drlg, svy, RS and chk BOP. Drlg, TFNB, W&R 30', no fill. Drlg w/no air through gas buster. DAP - 6 PPB. Svy: 2 deg @ 4485'. CC: \$93,529.

7/7/92 5660' Drlg 560'/23.5 hrs. Drlg, RS. Drlg w/DAP wtr, 6 ppb. CC: \$103,458.

7/8/92 6225' TD at 6:00 a.m. Drlg for 24 hrs. Drlg brks from 5711-5731'; 5969-5988'; 6118-6130'. Drlg w/full returns. Drlg w/wtr. CC: \$110,306.

7/9/92 6225' running 5-1/2" csg. Circ. Short trip 20 stds. Circ and displ hole w/400 bbls 10 ppg brine. TOH for logs. RU HLS and log as follows: run DLL-GR from 6225' to 270'; CNL-CDL-GR from 6225' to 2300'. TIH w/BHA and circ. LD DP and DC. Run 5-1/2" csg. Svy: 2-3/4 deg @ 6225'. CC: \$126,838.

7/10/92 6225' WOCU. Finish running 5-1/2" csg. Run 153 jts 5-1/2" 17# J-55 LT&C, tally 6232.92'. Set at 6225'. RU Halliburton and pump 30 BSF. Pump 405 sx lead Hy-fill cmt w/1#/sx Capseal and 0.3% HR-7, wt 11 ppg. Pump 540 sx 50-50 Poz cmt tail w/2% gel, 10% salt, 0.6% Halad 24, 0.2% CFR-3, 1#/sx Capseal and 1/4#/sx Flocele. Wt 14.2 ppg. Displace w/143 BFW. Bump plug w/2300 psi, floats held. Circ 25 bbls cmt to surf. Set csg slips w/90,000#, ND BOP and cut off csg. RR @ 11:00 a.m., 7/9/92. CC: \$194,361.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUBMIT IN DUPLICATE

(See other instructions on reverse side)

Form approved.  
Budget Bureau No. 1004-0137  
Expires August 31, 1985

WELL COMPLETION OR RECOMPLETION REPORT AND LOG\*

**1a. TYPE OF WELL:** OIL WELL  GAS WELL  DRY  Other

**b. TYPE OF COMPLETION:** NEW WELL  WORK OVER  REPAIR  PUMP BACK  PUMP REMOVAL  Other

**2. NAME OF OPERATOR**  
Coastal Oil & Gas Corporation

**3. ADDRESS OF OPERATOR**  
P.O. Box 749 Denver, CO 80201-0749

**4. LOCATION OF WELL** (Report location clearly and in accordance with any State requirements)  
At surface 1136' FEL & 1534' FNL  
At top prod. interval reported below Same as above.  
At total depth Same as above.

**14. PERMIT NO.** 43-047-32233 **DATE ISSUED** 4/27/92

**5. LEASE DESIGNATION AND SERIAL NO.** U-463

**6. IF INDIAN ALLOTTEE OR TRIBE NAME** N/A

**7. UNIT AGREEMENT NAME** Natural Buttes Unit

**8. FARM OR LEASE NAME** NBU

**9. WELL NO.** 186

**10. FIELD AND POOL OR WILDCAT** Natural Buttes

**11. SEC. T. R. M., OR BLOCK AND SURVEY OR AREA** Section 30, T9S, -R22E

**12. COUNTY OR PARISH** Uintah **13. STATE** Utah

**15. DATE SPUDDED** 6/5/92 **16. DATE T.D. REACHED** 7/7/92 **17. DATE COMPL. (Ready to prod.)** 9/8/92

**18. ELEVATIONS (OF RMB, RT, OR, ETC.)** 4942' GR **19. ELEV. CASINGHEAD**

**20. TOTAL DEPTH, MD & TVD** 6225' **21. PLUG BACK T.D., MD & TVD** 6177'

**22. IF MULTIPLE COMPL., HOW MANY?** **23. INTERVALS DRILLED BY** **ROTARY TOOLS** SFC-TD **CABLE TOOLS**

**24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)\*** 4897-6133' Wasatch **25. WAS DIRECTIONAL SURVEY MADE** No

**26. TYPE ELECTRIC AND OTHER LOGS RUN** DLL-GR, CNL, CDL-GR, CBL-CCL-GR **27. WAS WELL CORED** No

**28. CASING RECORD (Report all strings set in well)**

CASING SIZE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
8-5/8"	24#	270'	12-1/4"	150 sx Cl "G" + Add	None
5-1/2"	17#	6225'	7-7/8"	945 sx HiFill & 50/50 Poz	None

**29. LINER RECORD**

SIZE	TOP (MD)	BOTTOM (MD)	BACKS CEMENT*	SCREEN (MD)	30. TUBING RECORD SIZE	DEPTH SET (MD)	PACKER SET (MD)
					2-3/8"	4852'	

**31. PERFORATION RECORD (Interval, size and number)**  
Perforated w/4" csg gun, 1 JSPF @ following depths:  
4897' 5564' 6125'  
4905' 5976' 6133'  
4909' 5983'  
5108' 5989'

**32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.**

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
4897-6133'	2500 gals 15% acid
4897-6133'	104,000 gals gel 3% KCl wtr w/30-18% CO <sub>2</sub> & 220,000# 20/40 sand

**33. PRODUCTION**

DATE FIRST PRODUCTION	PRODUCTION METHOD (Flowing, gas lift, pumping—size and type of pump)	WELL STATUS (Producing or shut-in)
9/3/92	Flowing	SI

DATE OF TEST	HOURS TESTED	CHOKER SIZE	PROD'N. FOR TEST PERIOD	OIL—BSL.	GAS—MCF.	WATER—BSL.	GAS-OIL RATIO
9/8/92	24	18/64"		0	900	0	N/A

FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE	OIL—BSL.	GAS—MCF.	WATER—BSL.	OIL GRAVITY-API (CORR.)
600	650		0	900	0	N/A

**34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)** SIWOPLC **TEST WITNESSED BY** B. Rawlings

**35. LIST OF ATTACHMENTS** Chronological history.

**36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records**

SIGNED Eileen Manni Day TITLE Regulatory Analyst DATE 10/14/92

(See Instructions and Spaces for Additional Data on Reverse Side)

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals; and all drill-stem, tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries):

38. GEOLOGIC MARKERS

FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	NAME	MEAS. DEPTH	TRUE VERT. DEPTH
				Wasatch	4714'	4714'

THE COASTAL CORPORATION  
PRODUCTION REPORT

CHRONOLOGICAL HISTORY

NBU #186  
SECTION 30, T9S-R22E  
NATURAL BUTTES UNIT  
UINTAH COUNTY, UTAH  
WI: 100% COGC AFE: 13624  
TD: 6225' (WASATCH) SD: 7/2/92  
CSG: 5-1/2" @ 6225'  
PERFS: 4897'-6133' (WASATCH)  
CWC(M\$): 376.2

PAGE 2

- 7/11/92 WOCU. Drop from report until further activity.  
TC: \$194,361
- 9/1/92 Prep to run CBL. MIRU Well Tech rig #565. NU BOP, PU & RIH w/4-3/4" mill & 2-3/8" tbg. Tag PBD @ 6177'. Circ hole w/150 bbls 3% KCl wtr. POH w/tbg & mill. SDFN.  
DC: \$21,150 TC: \$215,511
- 9/2/92 Prep to acidize. RU Cutters. Run CBL-CCL-GR from PBD 6174' to 120'. Good bond. Perf 10 holes 6133', 6125', 5989', 5983', 5976', 5564', 5108', 4909', 4905', 4897'. RIH w/tbg to 6130'. SDFN.  
DC: \$20,748 TC: \$236,259
- 9/3/92 SI, WO frac. Circ gas out of hole. RU Smith, spot 28 bbls acid from 6130'-4897', POOH to 4852'. ND BOP, NU tree. Breakdown perfs w/2500 gal 15% acid, 74. BPM @ 4630 psi. ISIP 1600 psi, 5 min 1610 psi, 10 min 1600 psi, 15 min 1610 psi. Flwd 75 bbls, died, swab 52 bbls, flwg. Left open to pit on 20/64" chk. RDMO.  
DC: \$2,500 TC: \$238,759
- 9/3/92 Flwd 550 MCFD dry gas, FTP 275 psi, CP 475 psi, 18/64" chk. SI @ 6:00 a.m. Drop from report.
- 9/5/92 Flwg back after frac. Set & fill frac tanks & CO<sub>2</sub> vessels. RU Halliburton. Frac perfs 4897'-6133' (10 holes) w/104,000 gal gel 3% KCl wtr w/30-18% CO<sub>2</sub> & 220,000# 20/40 sand as follows:  
24,000 gal pad, 30% CO<sub>2</sub>.  
20,000 gal w/1 ppg sand, 30% CO<sub>2</sub>.  
20,000 gal w/2 ppg sand, 27% CO<sub>2</sub>.  
20,000 gal w/3 ppg sand, 24% CO<sub>2</sub>.  
10,000 gal w/4 ppg sand, 21% CO<sub>2</sub>.  
10,000 gal w/6 ppg sand, 18% CO<sub>2</sub>.  
4,400 gal flush, 18% CO<sub>2</sub>.  
AIR 25 BPM @ 2650 psi. ISIP 1440 psi, 15 min 1240 psi. SI 2-hrs. Start flow back @ 6:00 p.m. on 18/64" chk. 1877 BLTBR.  
DC: \$71,230 TC: \$309,989
- 9/5/92 Flwg 1.75 MMCFD CO<sub>2</sub>, FTP 1075 psi, CP 1025 psi, 18/64" chk, 5-10 BWPD.
- 9/6/92 Flwg 1.2 MMCFD CO<sub>2</sub>, FTP 900 psi, CP 1000 psi, 18/64" chk, 50 BWPD.
- 9/7/92 Flwg 1.3 MMCFD CO<sub>2</sub>, FTP 850 psi, CP 850 psi, 18/64" chk, 10 BWPD.
- 9/8/92 Flwg 900 MCFD, FTP 600 psi, CP 650 psi, 18/64" chk, 10 BWPD.
- 9/9/92 SI, WOPLC. Flwd 850 MCFD, FTP 580 psi, CP 650 psi, 18/64" chk, 10 BWPD. SI @ 2:00 p.m., 9/8/92. Drop from report.

COASTAL OIL & GAS CORPORATION  
CHRONOLOGICAL HISTORY

NBU #186  
NATURAL BUTTES UNIT  
UINTAH COUNTY, UTAH  
COASTALDRIL #2  
WI: 100% COGC AFE:  
ATD: 6225' (WASATCH) SD: 7/2/92  
CSG: 8-5/8" @ 270'  
DHC(M\$): 177.2

6/9/92 270' WORT. Drill 12-1/4" surf hole (spud @ 11:00 a.m., 6/5/92) to 262' GL w/Leon Ross Drlg and run 6 jts 8-5/8" 24# K-55 ST&C (tally 260.68'). Set at 270' KB. RU Halliburton and pump 150 sx C1 G w/2% CaCl<sub>2</sub> and 1/4#/sx Flocele. Displace w/14-3/4 bbls FW and circ 8.5 bbls cmt to surf. CC: \$31,612.

7/2/92 270' PU BHA. RD, MI RURT CD #2. NU BOPE. Test to 2000 psi, hydril and csg to 1500 psi. PU BHA. CC: \$62,084.

7/3/92 1710' Drlg 1440'/21 hrs. PU BHA, tag cmt at 245'. Drill cmt and shoe. Spud well at 8:00 a.m., 7/2/92. Drlg, svys: 3/4 deg @ 504'; 1 deg @ 1531'. Air mist, 1400 CFM at 300 psi. CC: \$70,427.

7/4/92 2980' Drlg 1270'/23 hrs. Drlg, svy, RS, chk BOP. Drlg, svy: 1-1/2 deg @ 2055'; 1-1/4 deg @ 2590'. Aerated wtr, CFM 1400. CC: \$77,868.

7/5/92 4280' Drlg 1300'/23.5 hrs. Drlg, svy, RS and chk BOP. Drlg w/aerated wtr. CFM 1400. Svy: 1-1/2 deg @ 3033'. Aerated wtr, CFM 1400. CC: \$85,060.

7/6/92 5100' Drlg 820'/18.5 hrs. Drlg, svy, RS and chk BOP. Drlg, TFNB, W&R 30', no fill. Drlg w/no air through gas buster. DAP - 6 PPB. Svy: 2 deg @ 4485'. CC: \$93,529.

7/7/92 5660' Drlg 560'/23.5 hrs. Drlg, RS. Drlg w/DAP wtr, 6 ppb. CC: \$103,458.

7/8/92 6225' TD at 6:00 a.m. Drlg for 24 hrs. Drlg brks from 5711-5731'; 5969-5988'; 6118-6130'. Drlg w/full returns. Drlg w/wtr. CC: \$110,306.

7/9/92 6225' running 5-1/2" csg. Circ. Short trip 20 stds. Circ and displ hole w/400 bbls 10 ppg brine. TOH for logs. RU HLS and log as follows: run DLL-GR from 6225' to 270'; CNL-CDL-GR from 6225' to 2300'. TIH w/BHA and circ. LD DP and DC. Run 5-1/2" csg. Svy: 2-3/4 deg @ 6225'. CC: \$126,838.

7/10/92 6225' WOCU. Finish running 5-1/2" csg. Run 153 jts 5-1/2" 17# J-55 LT&C, tally 6232.92'. Set at 6225'. RU Halliburton and pump 30 BSF. Pump 405 sx lead Hy-fill cmt w/1#/sx Capseal and 0.3% HR-7, wt 11 ppg. Pump 540 sx 50-50 Poz cmt tail w/2% gel, 10% salt,, 0.6% Halad 24, 0.2% CFR-3, 1#/sx Capseal and 1/4#/sx Flocele. Wt 14.2 ppg. Displace w/143 BFW. Bump plug w/2300 psi, floats held. Circ 25 bbls cmt to surf. Set csg slips w/90,000#, ND BOP and cut off csg. RR @ 11:00 a.m., 7/9/92. CC: \$194,361.



**Coastal**  
The Energy People

November 5, 1992

State of Utah  
Department of Natural Resources  
Division of Oil, Gas & Mining  
3 Triad Center, Suite 350  
Salt Lake City, UT 84180-1203

Attention: Vicky Carney

Re: NBU 186  
    Uintah County, Utah  
    API #43-047-32233

95 22E 30

RECEIVED

NOV 09 1992

DIVISION OF  
OIL GAS & MINING

Dear Vicky:

Per your request of November 2, 1992 letter, enclosed please find the CBL-CCL-GR log performed on the above-referenced well.

If further information regarding this well is needed, please contact me at (303) 573-4476.

Sincerely,

Eileen Danni Dey  
Regulatory Analyst

EDD:mem

Enclosure

cc: Well File

**Coastal Oil & Gas Corporation**

A SUBSIDIARY OF THE COASTAL CORPORATION  
600 17TH ST • STE 800 S • P O BOX 749 • DENVER CO 80201-0749 • 303/572-1121

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

**SUBMIT IN TRIPLICATE**

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other	7. If Unit or CA, Agreement Designation Natural Buttes Unit
2. Name of Operator Coastal Oil & Gas Corporation	8. Well Name and No. NBU #186
3. Address and Telephone No. P. O. Box 749 Denver, CO 80201-0749 (303) 573-4476	9. API Well No. 43-047-32233
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 1136' FEL & 1534' FNL (SE/NE) Section 30, T9S-R22E	10. Field and Pool, or Exploratory Area Natural Buttes
	11. County or Parish, State Uintah County, Utah

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Abandonment
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input checked="" type="checkbox"/> Other <u>First Sales</u>
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Dispose Water

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)  
(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

The above referenced well was connected to CIG's gas salesline and first sales occurred at 12:00 p.m., 1/30/93, with a rate of 1053 MCFPD, 0 BOPD, 0 BWPD, FTP 2165 psi, SICP 1981 psi, on 6/64" choke.

**RECEIVED**

FEB 16 1993

DIVISION OF  
OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Signed Heleen Hanni Day Title Regulatory Analyst Date 2/4/93

(This space for Federal or State office use)

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_

Conditions of approval, if any: \_\_\_\_\_

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*See instruction on Reverse Side

**UTAH DIVISION OF OIL, GAS AND MINING  
EQUIPMENT INVENTORY**

Operator: COASTAL OIL & GAS CORP. Lease: State: \_\_\_\_\_ Federal: Y  
 Indian: \_\_\_\_\_ Fee: \_\_\_\_\_

Well Name: NBU 186 API Number: 43-047-32233  
 Section: 30 Township: 9S Range: 22E County: UINTAH Field:  
NATURAL BUTTES  
 Well Status: PGW Well Type: Oil: \_\_\_\_\_ Gas: Y

PRODUCTION LEASE EQUIPMENT: Y CENTRAL BATTERY: \_\_\_\_\_

Y Well head \_\_\_\_\_ Boiler(s) \_\_\_\_\_ Compressor \_\_\_\_\_ Separator(s)  
Y Dehydrator(s) (1) Shed(s) \_\_\_\_\_ Line Heater(s) Y Heated  
 Separator  
 \_\_\_\_\_ VRU \_\_\_\_\_ Heater Treater(s)

PUMPS:  
 \_\_\_\_\_ Triplex \_\_\_\_\_ Y Chemical \_\_\_\_\_ Centrifugal

LIFT METHOD:  
 \_\_\_\_\_ Pumpjack \_\_\_\_\_ Hydraulic \_\_\_\_\_ Submersible \_\_\_\_\_ Flowing

GAS EQUIPMENT:  
Y Gas Meters \_\_\_\_\_ Purchase Meter Y Sales Meter

TANKS:	NUMBER	SIZE
	Oil Storage Tank(s)	_____ BBLs
	Water Tank(s)	_____ BBLs
	Power Water Tank	_____ BBLs
	<u>YES</u> Condensate Tank(s)	<u>1-100 BARREL</u> BBLs
	Propane Tank	_____ BBLs

REMARKS: SEPARATOR, DEHYDRATOR & SALES METER IN SINGLE SHED.

Location central battery: Qtr/Qtr: \_\_\_\_\_ Section: \_\_\_\_\_ Township: \_\_\_\_\_  
 Range: \_\_\_\_\_

Inspector: DENNIS INGRAM Date: 6/24/93

PGW

COASTAL OIL & GAS CORP.


U-463

NBU 186

43-047-32233

SEC 30 T9S R22E

↑  
NORTH

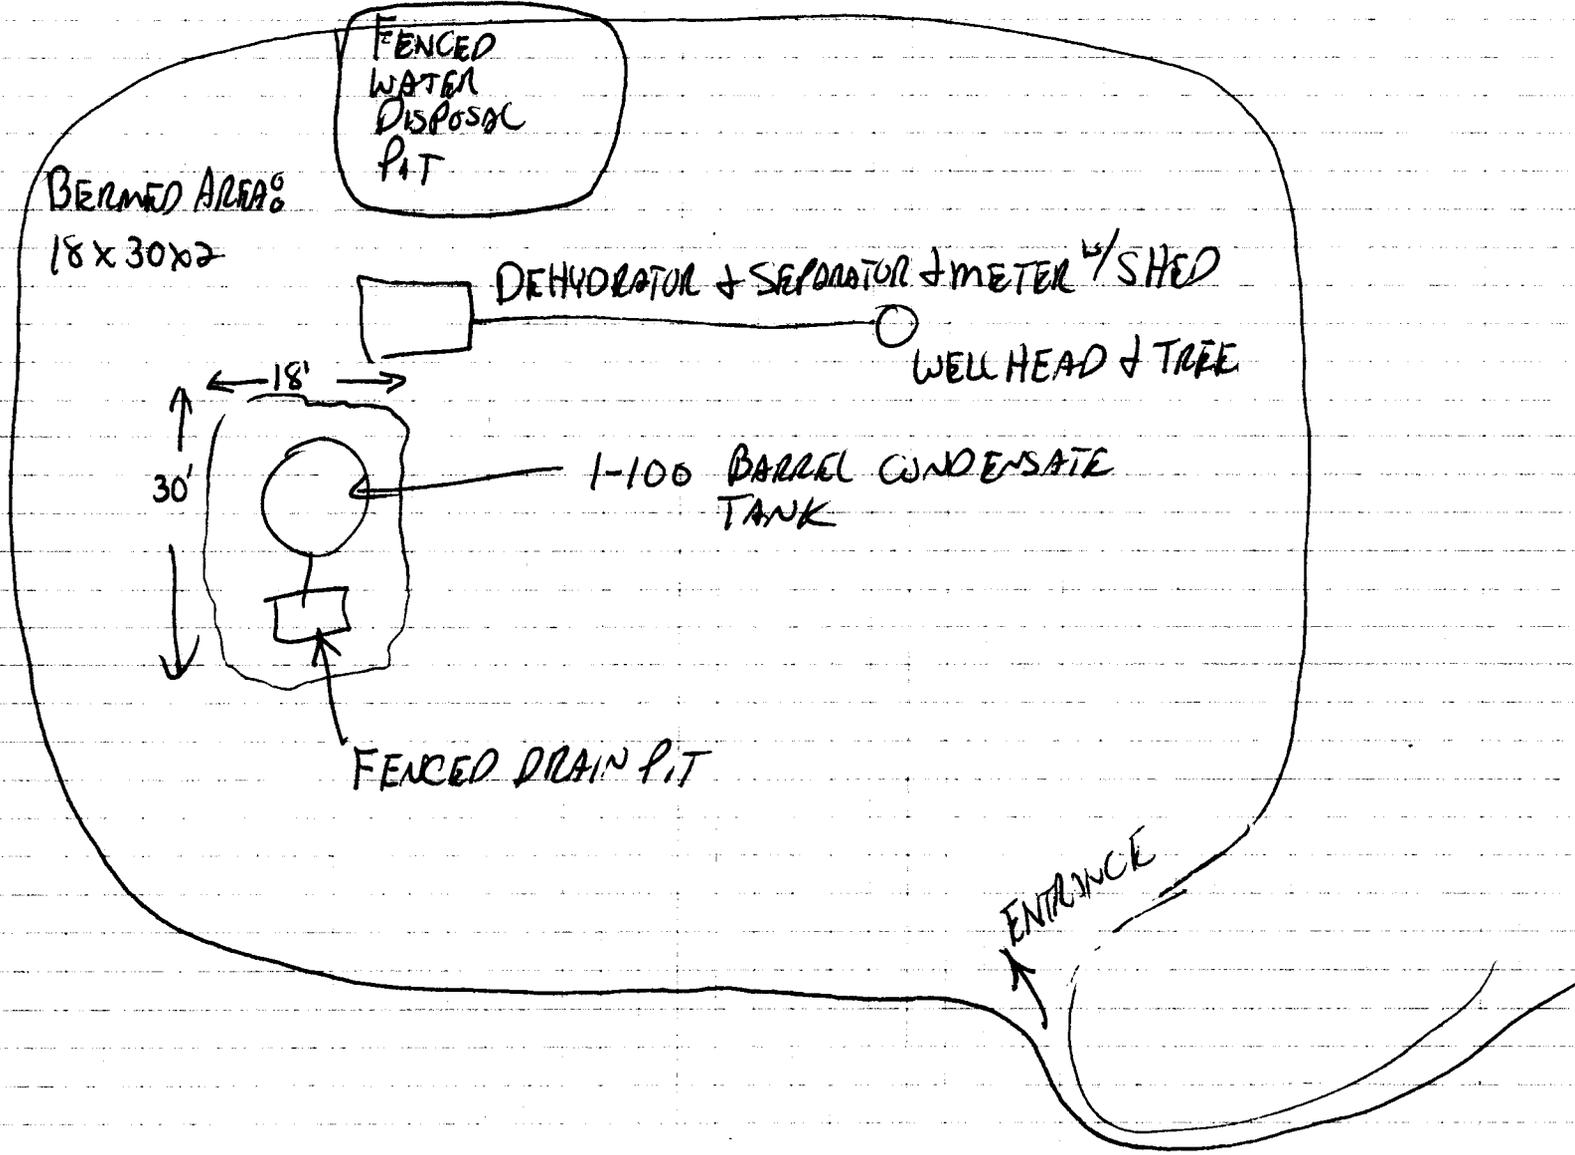

FENCED  
WATER  
DISPOSAL  
PIT

BERMED AREA  
18 x 30 x 2

DEHYDRATOR & SEPARATOR & METER w/ SHED

WELL HEAD & TREE

1-100 BARREL CONDENSATE  
TANK

FENCED DRAIN PIT

ENTRANCE

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

RECEIVED

JUL 02 1993

DIVISION OF

OIL, GAS & MINING  
(303) 573-4476

4 Lease Designation and Serial No.  
U-463

5 If Indian, Notice or Tribe Name  
N/A

6 If Unit or CA Agreement Designation  
Natural Buttes Unit

7 Well Name and No.  
NBU #186

8 API Well No.  
43-047-32233

9 Field and Pool, or Exploratory Area  
Natural Buttes

10 Country or Parish, State  
Uintah County, Utah

1 Type of Well  
 Oil Well  Gas Well  Other

2 Name of Operator  
Coastal Oil & Gas Corporation

3 Address and Telephone No.  
P. O. Box 749 Denver, CO 80201-0749

4 Location of Well (Fontage, Sec., T., R., M., or Survey Description)  
1136' FEL & 1534' FNL (SE/NE)  
Sec. 30, T9S-R22E

CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

- Notice of Intent
- Subsequent Report
- Final Abandonment Notice

- Abandonment
- Recompletion
- Plugging Back
- Casing Repair
- Altering Casing
- Other NTL 2B; IV

- Change of Plans
- New Construction
- Non-Routine Fracturing
- Water Shut-Off
- Conversion to Injection
- Dispose Water

(Note: Report results of mutuality completion on Well Completion or Recompletion Report and Log form.)

3. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Coastal Oil & Gas Corporation hereby requests permission to dispose of produced water in unlined pits per NTL 2B, IV; for the subject well:

- 1) This well is completed in the Wasatch formation and produces less than 5 barrels of water per day on a monthly basis.
- 2) Two unlined pits per location are used, in most cases, due to the size and layout of the location: 40' x 40' x 8' and 6' x 6' x 6' deep with berms surrounding them. Each pit is fenced and has cement corner posts, per BLM specifications. (See the attached typical facilities diagram.)
- 3) The average evaporation rate for the area compensated for annual rainfall is 70 inches per year.
- 4) The estimated percolation rate based on the soil characteristics under and adjacent to the pits is 2-6 inches per hour.
- 5) The depth of usable water aquifers in this area is approximately 1500 feet.

Accepted by the State  
of Utah Division of  
Oil, Gas and Mining


Date: 7-8-93  
Federal Approval of this  
Action is Necessary  
Date: 8/28/93

4 I hereby certify that the foregoing is true and correct.  
Signed: [Signature] Title: Regulatory Analyst

(This space for Federal or State office use)

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_  
Conditions of approval, if any:

COASTAL OIL & GAS CORP.  
NATURAL BUTTES UNIT  
TYPICAL FACILITIES LAYOUT  
NTL-2B; IV

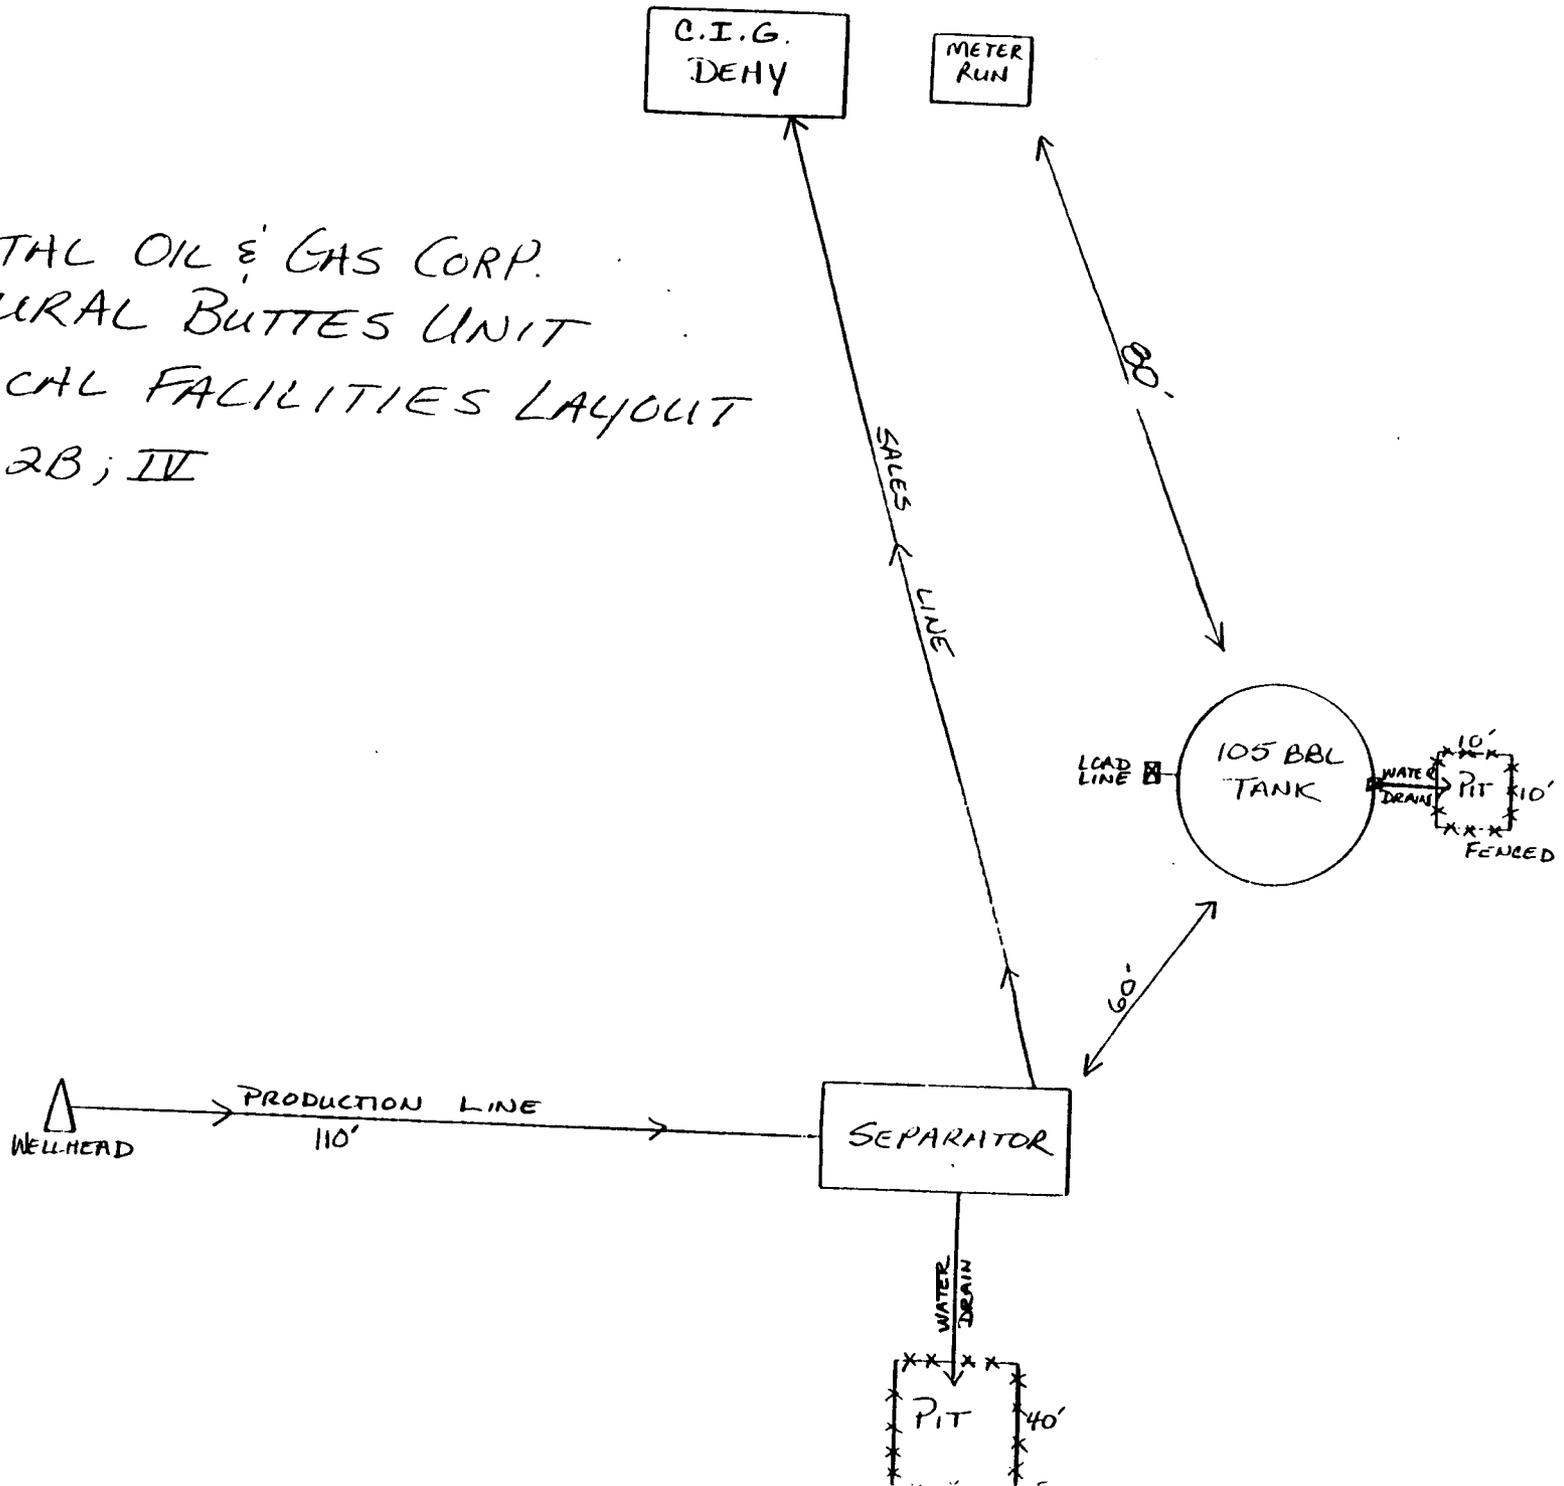

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT - " for such proposals

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

5. Lease Designation and Serial No.

U-463

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA, Agreement Designation

Natural Buttes Unit

8. Well Name and No.

NBU #186

9. API Well No.

43-047-32233

10. Field and Pool, or exploratory Area

Natural Buttes

11. County or Parish, State

Uintah UT

SUBMIT IN TRIPLICATE

1. Type of Well

Oil Well  Gas Well  Other

2. Name of Operator

Coastal Oil & Gas Corporation

3. Address and Telephone No.

P.O. Box 749, Denver, CO 80201-0749 (303) 573-4455

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1136' FEL & 1534' FNL (SE/NE)  
Sec. 30, T9S-R22E

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- Notice of Intent
- Subsequent Report
- Final Abandonment Notice

TYPE OF ACTION


- Abandonment
- Recompletion
- Plugging Back
- Casing Repair
- Altering Casing
- Other Lwr tbq. acidize.
- Change of Plans
- New Construction
- Non-Routine Fracturing
- Water Shut-Off
- Conversion to Injection
- Dispose Water

install PLE

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Please see the attached procedure for work to be performed in the subject well.



14. I hereby certify that the foregoing is true and correct

Signed Sheila Bremer

Title Sheila Bremer

Environmental & Safety Analyst

Date 8/26/97

(This space for Federal or State office use)

Approved by \_\_\_\_\_

Title \_\_\_\_\_

Date \_\_\_\_\_

Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\* See Instruction on Reverse Side

NBU #186-30-9-22  
NATURAL BUTTES FIELD  
SECTION 30 T9S R22E  
WORKOVER PROCEDURE *HWM*

WELL DATA

LOCATION: 1534' FNL 1136' FEL SEC. 30 T9S R22E  
ELEVATION: 4942' GR., 4954' KB.  
TD: 6225', PBSD 6177' (1991); WLS 6138' (11/96)  
CSG: 8-5/8", 24.0#, K-55 @ 270' w/ 150 SX.  
5-1/2", 17.0#, J-55 @ 6225' w/ 945 SX.  
TBG: 2-3/8", 4.7#, J-55 @ 4852'  
FORMATION(S): WASATCH 4897' - 6133', 10 HOLES (1991)

PROCEDURE

1. MI & RU pulling unit. Blow down & kill well w/ minimum amount of 2% KCL water. ND WH. NU BOP. Record BLTR.
2. RIH w/ tbg to 6133'. RU service company. Spot 1218 gal. 15% HCL acid w/ additives across perf's 4897' - 6133' to clean up possible scale. RD service company. PU above perf's & wait 3 hrs for acid to soak. RIH & land 2-3/8" tbg @ 5989' (new EOT).
4. ND BOP. NU WH. RD & MO pulling unit. RU swab unit. Swab/flow back to clean up.
5. Complete installation of plunger lift equipment. Return the well to sales.

DATE 07/17/97  
 FOREMAN \_\_\_\_\_  
 KB 4954'

WELL BU 186  
 FIELD NATURAL BUTTES

SECTION 30  
 COUNTY UINTAH  
 STATE UT

TWS: T9S  
 RNG R22E

1534' FNL 1136' FEL

SPUD 6/05/92 COMPL 9/08/92

**CASING RECORD**

SIZE	WT	GRADE	THD	AI	CMT
8-5/8"	24.0#	K-55		270'	150 SX.
5-1/2"	17.0#	J-55		6225'	945 SX.

**TUBING RECORD**

SIZE	WT	GRADE	THD	FROM	TO
2-3/8"	4.7#	J-55		0'	4852'
JTS 148	SN 4795'	AC	MUD ANCHOR SIZE	LGTH	

**COMMENTS/PERFORATIONS:**

9/92 WASATCH 4897' - 6133' 10 HOLES W/ 4" C.G.


4897'	5108'	5564	5976'	6125'
4905'			5983'	6133'
4909'			5989'	

BD W 2500 GAL 15% HCL + BS'S

FRAC'D W/ 220,000 # 20/40 SD + 104,000 GAL GEL W/ 30% CO2  
 IPF (9/92) 900 MCF  
 18/64" FTP 600#, CP 650#

11/96 WLS PBD 6138' - NO PERF'S COVERED

5/97 FLS - FL @ 4262' -EOT 4852'

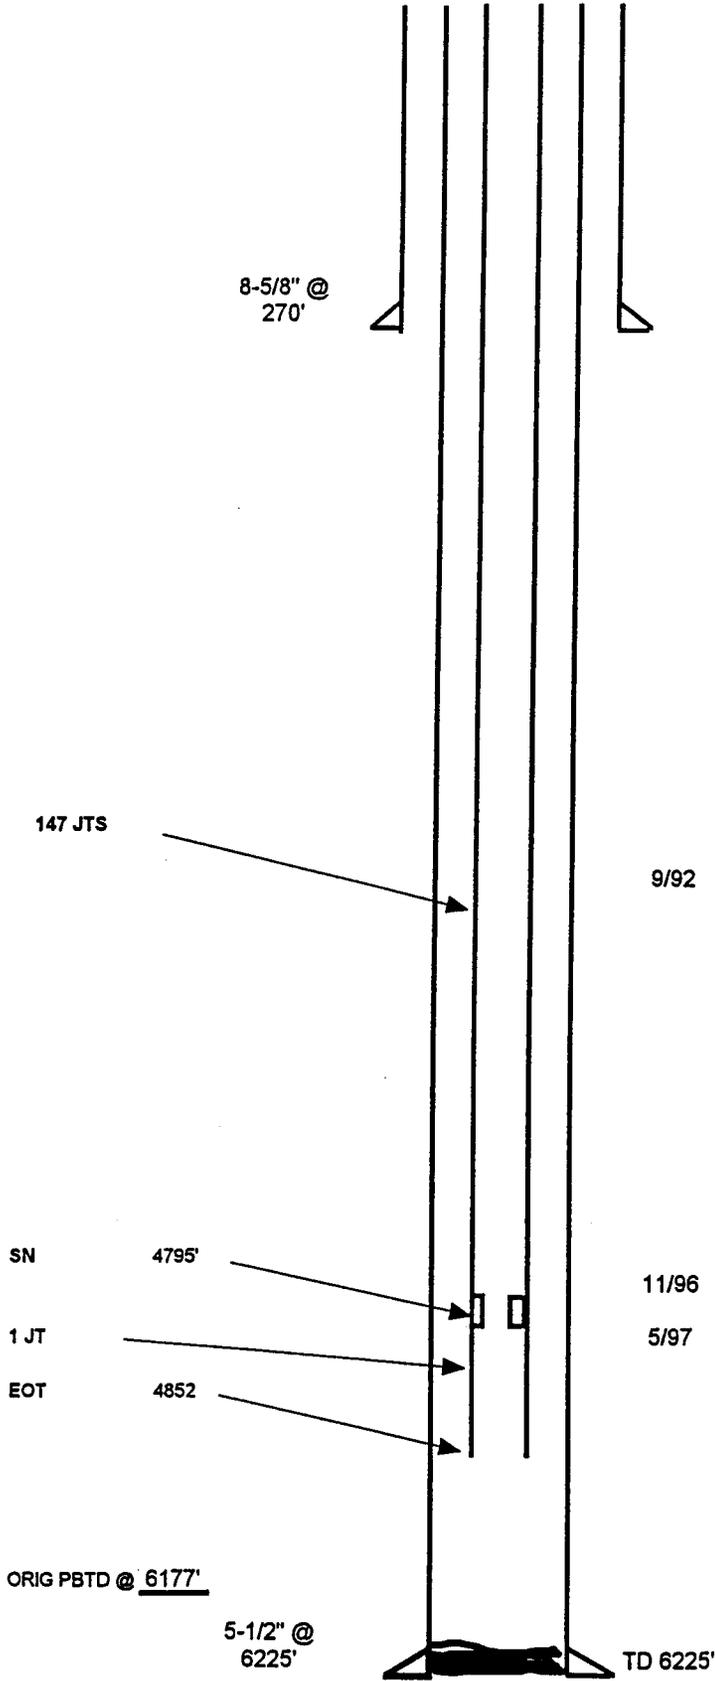

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT - " for such proposals

5. Lease Designation and Serial No.  
**U-463**

6. If Indian, Allottee or Tribe Name  
**N/A**

7. If Unit or CA, Agreement Designation  
**Natural Buttes Unit**

8. Well Name and No.  
**NBU #186**

9. API Well No.  
**43-047-32233**

10. Field and Pool, or exploratory Area  
**Natural Buttes**

11. County or Parish, State  
**Uintah UT**

**SUBMIT IN TRIPLICATE**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
**Coastal Oil & Gas Corporation**

3. Address and Telephone No.  
**P.O. Box 749, Denver, CO 80201-0749 (303) 573-4455**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**1136' FEL & 1534' FNL (SE/NE)  
Sec. 30, T9S-R22E**


12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Abandonment
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input checked="" type="checkbox"/> Other <b>Lwr tbg. acidize. install PLE</b>
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Please see the attached chronological history for work performed in the subject well.

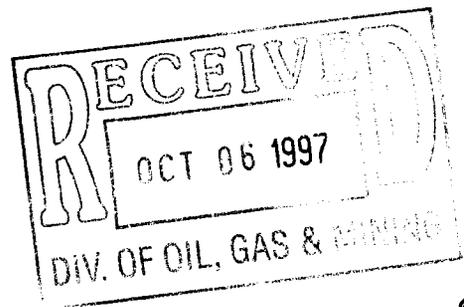

*WTC  
12-23-98  
RJK*

14. I hereby certify that the foregoing is true and correct  
 Signed Sheila Bremer Title Environmental & Safety Analyst Date 10/2/97

(This space for Federal or State office use)

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_  
 Conditions of approval, if any:

**Acdz, Lwr Tbg, Install PLE**

- 09/14/97 **Prep to spot acid.** MIRU GWS rig #101. Blew down tbg & csg. Pumped 10 bbls 2% KCl down tbg. ND WH, NU BOPs. PU tbg & TIH to 6122'. PU above perfs. SDFN.  
DC: \$3,089 TC: \$3,089
- 09/15/97 **Prep to swab.** SITP 280#, SICP 300#. Blow down tbg & csg. Pmp 10 bbls 2% KCl down csg. RIH to 6121' RU B J Serv. PT lines to 3000#. Pmp 20 bbls 2% KCl, ahead spot 1218 gals 15% HCl w/ additives across perfs. Displ w/ 23 bbls 2% KCl. RD B J Serv. Broach tbg while waiting on acid to soak 3 hrs. RU & swab well. Made 20 runs, rec 77 bbls. IFL 3600', FFL 4500'. LD 5 jts. Landed tbg @ 5968', SN 1 jt up, w/ 183 jts total. ND BOPs, NU WH. SDFN.  
DC: \$13,549 TC: \$16,638
- 09/16/97 **Put well on production.** RDMO GWS rig #101. MI Delsco. Install PLE. IFL 4200', ITP 200#, ICP 350#. Tried plunger, no arrival. Made 5 swab runs, rec 32 bbls. Made 3 runs w/ plunger, rec 10 more bbls. Put on production 09/16/97 @ 4:30 pm.  
DC: \$1,339 TC: \$17,977
- 09/17/97 Dwn 24 hrs. Unable to open sfc valve.
- 09/18/97 Flwg 30 MCF, 10 BW, FTP 141#, CP 441#, on a 64/64" chk, 24 hrs.
- 09/19/97 Flwg 60 MCF, 10 BW, FTP 141#, CP 256#, on a 64/64" chk, 24 hrs.
- 09/20/97 Flwg 59 MCF, 5 BW, FTP 72#, CP 151#, on a 64/64" chk, 24 hrs.
- 09/21/97 Flwg 5 MCF, 0 BW, FTP 81#, CP 200#, 64/64" chk, 24 hrs.
- 09/22/97 Flwg 51 MCF, 5 BW, FTP 107#, CP 196#, on a 48/64" chk.
- 09/23/97 Flwg 72 MCF, 1 BW, FTP 83#, CP 178#, on a 64/64" chk.
- 09/24/97 Flwg 65 MCF, 2 BW, FTP 135#, CP 186#, on a 64/64" chk. Prior production:  
Flwg 39 MCF, 0 BW, FTP 11#, CP 245#, on a 20/64" chk. **Final Report.**

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER:
2. NAME OF OPERATOR: El Paso Production Oil & Gas Company		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: 8 South 1200 East CITY Vernal STATE Utah ZIP 84078		7. UNIT or CA AGREEMENT NAME:
4. LOCATION OF WELL FOOTAGES AT SURFACE: _____ QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: _____		8. WELL NAME and NUMBER: Exhibit "A"
PHONE NUMBER: 435-789-4433		9. API NUMBER:
		10. FIELD AND POOL, OR WILDCAT:
		COUNTY: _____
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA



TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Name Change</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

As a result of the merger between The Coastal Corporation and a wholly owned subsidiary of El Paso Energy Corporation, the name of Coastal Oil & Gas Corporation has been changed to El Paso Production Oil & Gas Company effective March 9, 2001.

See Exhibit "A"

Bond # 400JU0708

Coastal Oil & Gas Corporation	
NAME (PLEASE PRINT) <u>John T. Elzner</u>	TITLE <u>Vice President</u>
SIGNATURE 	DATE <u>06-15-01</u>
El Paso Production Oil & Gas Company	
NAME (PLEASE PRINT) <u>John T. Elzner</u>	TITLE <u>Vice President</u>
SIGNATURE 	DATE <u>06-15-01</u>

(This space for State use only)

**RECEIVED**  
JUN 19 2001  
DIVISION OF  
OIL, GAS AND MINING

State of Delaware  
*Office of the Secretary of State*

---

PAGE 1

I, HARRIET SMITH WINDSOR, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF AMENDMENT OF "COASTAL OIL & GAS CORPORATION", CHANGING ITS NAME FROM "COASTAL OIL & GAS CORPORATION" TO "EL PASO PRODUCTION OIL & GAS COMPANY", FILED IN THIS OFFICE ON THE NINTH DAY OF MARCH, A.D. 2001, AT 11 O'CLOCK A.M.

RECEIVED

MAR 9 2001

DIVISION OF  
OIL, GAS AND MINING



*Harriet Smith Windsor*  
*Harriet Smith Windsor, Secretary of State*

0610204 8100

AUTHENTICATION: 1061007

010162788

DATE: 04-03-01

CERTIFICATE OF AMENDMENT  
OF  
CERTIFICATE OF INCORPORATION

COASTAL OIL & GAS CORPORATION (the "Company"), a corporation organized and existing under and by virtue of the General Corporation Law of the State of Delaware, DOES HEREBY CERTIFY:

FIRST: That the Board of Directors of the Company, by the unanimous written consent of its members, filed with the minutes of the Board, adopted a resolution proposing and declaring advisable the following amendment to the Certificate of Incorporation of the Company:

RESOLVED that it is deemed advisable that the Certificate of Incorporation of this Company be amended, and that said Certificate of Incorporation be so amended, by changing the Article thereof numbered "FIRST." so that, as amended, said Article shall be and read as follows:


"FIRST. The name of the corporation is El Paso Production Oil & Gas Company."

SECOND: That in lieu of a meeting and vote of stockholders, the stockholders entitled to vote have given unanimous written consent to said amendment in accordance with the provisions of Section 228 of the General Corporation Law of the State of Delaware.

THIRD: That the aforesaid amendment was duly adopted in accordance with the applicable provisions of Sections 242 and 228 of the General Corporation Law of the State of Delaware.

IN WITNESS WHEREOF, said COASTAL OIL & GAS CORPORATION has caused this certificate to be signed on its behalf by a Vice President and attested by an Assistant Secretary, this 9th day of March 2001.

COASTAL OIL & GAS CORPORATION

  
\_\_\_\_\_  
David L. Siddall  
Vice President

Attest:

  
\_\_\_\_\_  
Margaret E. Roark, Assistant Secretary

RECEIVED

STATE OF DELAWARE  
SECRETARY OF STATE  
DIVISION OF CORPORATIONS  
FILED 11:00 AM 03/09/2001  
010118394 - 0610204

JUN 19 2001

DIVISION OF  
OIL, GAS AND MINING



# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155

# RECEIVED

JUL 12 2001

DIVISION OF  
OIL, GAS AND MINING

In Reply Refer To:  
3106  
UTSL-065841  
(UT-924)

JUL 10 2001

### NOTICE

El Paso Production Oil & Gas Company : Oil and Gas  
Nine Greenway Plaza :  
Houston TX 77046-0095 :

#### Name Change Recognized

Acceptable evidence has been received in this office concerning the name change of Coastal Oil & Gas Corporation into El Paso Production Oil & Gas Company with El Paso Production Oil & Gas Company being the surviving entity.

For our purposes, the name change is recognized effective March 9, 2001.

The oil and gas lease files identified on the enclosed exhibit have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Coastal Oil & Gas Corporation to El Paso Production Oil & Gas Company. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Wyoming and Colorado.



Opolonia L. Abeyta  
Acting Chief, Branch of  
Minerals Adjudication

Enclosure

1. Exhibit of Leases (1 pp)

cc: Moab Field Office  
Vernal Field Office  
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217  
~~State of Utah, DOGM,~~ Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114  
Teresa Thompson (UT-922)  
Joe Incardine (UT-921)

## Exhibit of Leases

UTUSL-065841A	UTU-47172	UTU-74415	UTU-53860
UTU-28652	UTU-50687	UTU-74416	UTU-66401
UTU-37943	UTU-52298	UTU-75091	UTU-67868
UTU-44089	UTU-0109054	UTU-75096	UTU-65389
UTU-44090A	UTU-0143511	UTU-75097	UTU-77084
UTU-61263	UTU-0143512	UTU-75673	UTU-61430
UTU-00343	UTU-38401	UTU-76259	UTU-72633
UTU-02651	UTU-38411	UTU-76260	UTU-72650
UTU-02651B	UTU-38418	UTU-76261	UTU-49692
UTU-0142175	UTU-38419	UTU-76493	UTU-57894
UTU-70235	UTU-38420	UTU-76495	UTU-76829
UTU-70406	UTU-38421	UTU-76503	UTU-76830
UTU-74954	UTU-38423	UTU-78228	UTU-76831
UTU-75132	UTU-38424	UTU-78714	
UTU-75699	UTU-38425	UTU-78727	
UTU-76242	UTU-38426	UTU-78734	
UTU-78032	UTU-38427	UTU-79012	
UTU-4377	UTU-38428	UTU-79011	
UTU-4378	UTU-53861	UTU-71694	
UTU-7386	UTU-58097	UTU-00576	
UTU-8344A	UTU-64376	UTU-00647	
UTU-8345	UTU-65222	UTU-01470D	
UTU-8347	UTU-65223	UTU-0136484	
UTU-8621	UTU-66746	UTU-8344	
UTU-14646	UTU-67178	UTU-8346	
UTU-15855	UTU-67549	UTU-8648	
UTU-25880	UTU-72028	UTU-28212	
UTU-28213	UTU-72632	UTU-30289	
UTU-29535	UTU-73009	UTU-31260	
UTU-29797	UTU-73010	UTU-33433	
UTU-31736	UTU-73013	UTU-34711	
UTU-34350	UTU-73175	UTU-46699	
UTU-34705	UTU-73434	UTU-78852	
UTU-37116	UTU-73435	UTU-78853	
UTU-37355	UTU-73444	UTU-78854	
UTU-37573	UTU-73450	UTU-075939	
UTU-38261	UTU-73900	UTU-0149767	
UTU-39223	UTU-74409	UTU-2078	
UTU-40729	UTU-74410	UTU-44426	
UTU-40736	UTU-74413	UTU-49530	
UTU-42469	UTU-74414	UTU-51026	

**OPERATOR CHANGE WORKSHEET**

**ROUTING**

1. GLH		4-KAS
2. CDW ✓		5-LP ✓
3. JLT		6-FILE

Enter date after each listed item is completed

Change of Operator (Well Sold)

Designation of Agent

Operator Name Change (Only)

**X** Merger

The operator of the well(s) listed below has changed, effective: **3-09-2001**

<b>FROM: (Old Operator):</b>
COASTAL OIL & GAS CORPORATION
Address: 9 GREENWAY PLAZA STE 2721
HOUSTON, TX 77046-0995
Phone: 1-(713)-418-4635
Account N0230

<b>TO: (New Operator):</b>
EL PASO PRODUCTION OIL & GAS COMPANY
Address: 9 GREENWAY PLAZA STE 2721 RM 2975B
HOUSTON, TX 77046-0995
Phone: 1-(832)-676-4721
Account N1845

**CA No.**

**Unit: NATURAL BUTTES**

**WELL(S)**

NAME	API NO	ENTITY NO	SEC TWN RNG	LEASE TYPE	WELL TYPE	WELL STATUS
NBU CIGE 63D-29-9-22P	43-047-30949	2900	29-09S-22E	FEDERAL	GW	P
CIGE 116-29-9-22	43-047-31919	2900	29-09S-22E	FEDERAL	GW	P
NBU 329-29E	43-047-32229	2900	29-09S-22E	FEDERAL	GW	P
CIGE 189-29-9-22	43-047-32863	2900	29-09S-22E	FEDERAL	GW	P
NBU 389-29E	43-047-33049	2900	29-09S-22E	FEDERAL	GW	P
NBU 52	43-047-30850	2900	30-09S-22E	FEDERAL	GW	P
NBU 49V	43-047-31249	2900	30-09S-22E	FEDERAL	GW	P
NBU 49-30-9-22	43-047-31735	2900	30-09S-22E	FEDERAL	GW	P
COG NBU 78	43-047-31762	2900	30-09S-22E	FEDERAL	GW	P
NBU 184	43-047-32170	2900	30-09S-22E	FEDERAL	GW	P
<b>NBU 186</b>	43-047-32233	2900	30-09S-22E	FEDERAL	GW	P
NBU 236	43-047-32994	2900	30-09S-22E	FEDERAL	GW	P
NBU 278	43-047-33011	2900	30-09S-22E	FEDERAL	GW	DRL
NBU 356	43-047-33232	2900	30-09S-22E	FEDERAL	GW	P
NBU 354	43-047-33231	2900	31-09S-22E	FEDERAL	GW	P
NBU CIGE 27-33-9-22	43-047-30738	2900	33-09S-22E	FEDERAL	GW	P
NBU CIGE 64D-33-9-22P	43-047-30950	2900	33-09S-22E	FEDERAL	GW	P
COG NBU 93	43-047-31753	2900	33-09S-22E	FEDERAL	GW	P
CIGE 109D-33-9-22	43-047-31754	2900	33-09S-22E	FEDERAL	GW	P
NBU 112	43-047-31930	2900	33-09S-22E	FEDERAL	GW	P

**OPERATOR CHANGES DOCUMENTATION**

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 06/19/2001
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 06/19/2001
- The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 06/21/2001
- Is the new operator registered in the State of Utah: YES Business Number: 608186-0143



JAN. 17. 2003 3:34PM

WESTPORT

NO. 173 P. 2

**WESTPORT OIL AND GAS COMPANY, L.P.**

410 Seventeenth Street #2300 Denver Colorado 80202-4436  
Telephone: 303 573 5404 Fax: 303 573 5609

February 1, 2002

Department of the Interior  
Bureau of Land Management  
2850 Youngfield Street  
Lakewood, CO 80215-7093  
Attention: Ms. Martha Maxwell

RE: BLM Bond CO-1203  
BLM Nationwide Bond 158626364  
Surety - Continental Casualty Company  
Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.  
Conversion of Westport Oil and Gas Company, Inc., into Westport Oil and Gas Company, L.P.  
Assumption Rider - Westport Oil and Gas Company, L.P.

Dear Ms. Maxwell:

Pursuant to our recent conversations, please find the following list of enclosures for the BLM's consideration and approval:

Two (2) Assumption Riders, fully executed originals.  
Copies of Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.  
Copies of Westport Oil and Gas Company, Inc., conversion into Westport Oil and Gas Company, L.P.  
List of all Federal/BIA/State Leases - Belco/Westport's leases - in all states.

Please inform us of any additional information needed to complete the change to Westport Oil and Gas Company, L.P., as operator of record.

I thank you for your assistance and cooperation in this matter. Please do not hesitate contacting the undersigned, should a question arise.

Sincerely,  
Westport Oil and Gas Company, L.P.

Debby J. Black  
Engineer Technician

Encl:



United States Department of the Interior **RECEIVED**

BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155

FEB 22 2002

DIVISION OF  
OIL, GAS AND MINING

In Reply Refer To:  
3106  
UTU-25566 et al  
(UT-924)

FEB 21 2002

NOTICE

Westport Oil and Gas Company L.P. : Oil and Gas  
410 Seventeenth Street, #2300 :  
Denver Colorado 80215-7093 :

Name Change Recognized

Acceptable evidence has been received in this office concerning the name change of Westport Oil and Gas Company, Inc. into Westport Oil and Gas Company, L.P. with Westport Oil and Gas Company, L.P. being the surviving entity.


For our purposes, the name change is recognized effective December 31, 2001.

The oil and gas lease files identified have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Westport Oil and Gas Company, Inc. to Westport Oil and Gas Company, L.P.. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Colorado.

UTU-03405  
UTU-20895  
UTU-25566  
UTU-43156  
UTU-49518  
UTU-49519  
UTU-49522  
UTU-49523



Robert Lopez  
Chief, Branch of  
Minerals Adjudication

cc: Moab Field Office  
Vernal Field Office  
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217  
State of Utah, DOGM, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114  
Teresa Thompson (UT-922)  
Joe Incardine (UT-921)

# memorandum

Branch of Real Estate Services  
Uintah & Ouray Agency

Date: 5 December, 2002

Reply to  
Attn of: Supervisory Petroleum Engineer

Subject: Modification of Utah Division of Oil, Gas and Mining Regulations

To: Director, Utah Division of Oil, Gas and Mining Division: John Baza

We have been advised of changes occurring with the operation of your database for Change of Operator. You will be modifying your records to reflect Change of Operator once you have received all necessary documentation from the companies involved, and perhaps in advance of our Notice of Concurrence/Approval of Change of Operator where Indian leases are involved.

We have no objection.

With further comment to Rulemaking, I wish to comment concerning the provision of Exhibits for upcoming Hearings. I would like to see the Uintah & Ouray Agency, BIA, and the Ute Indian Tribe, Energy & Mineral Resources Department added to the list of those parties that receive advance Exhibits so as to allow us to have research time prior to Hearing dates. We will be able to provide a more informed recommendation to the Oil, Gas and Mining Board. It would be best if we would receive only those Exhibits that concern Indian lands, specifically on or adjacent to Indian lands. This may be a difficult situation to attain, as it is not always clear where 'on or adjacent' occurs.

I am aware that you have gone to extra effort to correct this matter already, and I fully appreciate it. My request is intended only to allow the addition of Uintah & Ouray Agency and Ute Indian Tribe to the official listing.

We appreciate your concern, and hope that these comments are timely enough for consideration in the revision process.

CC: Minerals & Mining Section of RES  
Ute Energy & Mineral Resources Department: Executive Director  
chrono





# United States Department of the Interior

BUREAU OF INDIAN AFFAIRS  
Washington, D.C. 20240

FEB 1 0 2003

IN REPLY REFER TO:  
Real Estate Services

Carroll A. Wilson  
Principal Landman  
Westport Oil and Gas Company, L.P.  
1368 South 1200 East  
Vernal, Utah 84078

Dear Mr. Wilson:

This is in response to your request for approval of RLI Insurance Company's Nationwide Oil and Gas Lease Bond No. RLB0005239 executed effective December 17, 2002, (\$150,000 coverage) with Westport Oil and Gas Company, L. P., as principal.

This bond is hereby approved as of the date of this correspondence and will be retained in the Bureau of Indian Affairs' Division of Real Estate Services, 1849 C Street, NW, MS-4512-MIB, Washington, D.C. 20240. All Bureau oil and gas regional offices and the surety are being informed of this action.

In cases where you have existing individual and/or collective bonds on file with one or more of our regional offices, you may now request those offices, directly, to terminate in lieu of coverage under this Nationwide Bond.

Enclosed is a copy of the approved bond for your files. If we may be of further assistance in this matter, please advise.

Sincerely,

Director, Office of Trust Responsibilities

**ACTING**

Enclosure



# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155

IN REPLY REFER TO  
UT-922

February 27, 2003

Westport Oil and Gas Company, L.P.  
Attn: Gary D. Williamson  
1670 Broadway, Suite 2800  
Denver, Colorado 80202

Re: Natural Buttes Unit  
Uintah County, Utah

Gentlemen:

On February 27, 2003, we received an indenture dated December 17, 2002, whereby El Paso Production Oil & Gas Company resigned as Unit Operator and Westport Oil and Gas Company, L.P., was designated as Successor Unit Operator for the Natural Buttes Unit, Uintah County, Utah.

This indenture was executed by all required parties and the signatory parties have complied with Sections 5 and 6 of the unit agreement. The instrument is hereby approved effective February 27, 2003. In approving this designation, the Authorized Officer neither warrants nor certifies that the designated party has obtained all required approval that would entitle it to conduct operations under the Natural Buttes Unit Agreement.

Your nationwide (Colorado) oil and gas bond No. 1203 will be used to cover all operations within the Natural Buttes Unit.

It is requested that you notify all interested parties of the change in unit operator. Copies of the approved instruments are being distributed to the appropriate federal offices, with one copy returned herewith.

Sincerely,

/s/ Robert A. Henricks

Robert A. Henricks  
Chief, Branch of Fluid Minerals

Enclosure

bcc: Field Manager - Vernal (w/enclosure)  
SITLA  
Division of Oil, Gas & Mining  
Minerals Adjudication Group  
File - Natural Buttes Unit (w/enclosure)  
Agr. Sec. Chron  
Fluid Chron

UT922:TAThompson:tt:02/27/2003

RECEIVED

FEB 28 2003

DIV. OF OIL, GAS & MINING

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER:
2. NAME OF OPERATOR: El Paso Production Oil & Gas Company		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: 9 Greenway Plaza      Houston      STATE TX      ZIP 77064-0995		7. UNIT or CA AGREEMENT NAME:
PHONE NUMBER: (832) 676-5933		8. WELL NAME and NUMBER: Exhibit "A"
4. LOCATION OF WELL FOOTAGES AT SURFACE:  QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		9. API NUMBER:
		10. FIELD AND POOL, OR WILDCAT:  COUNTY:  STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate)  Approximate date work will start: _____  <input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only)  Date of work completion: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Operator change to Westport Oil and Gas Company, L.P., 1670 Broadway, Suite 2800, Denver, CO. 80202-4800, effective December 17, 2002.

BOND # \_\_\_\_\_  
State Surety Bond No. RLB0005236  
Fee Bond No. RLB0005238

EL PASO PRODUCTION OIL & GAS COMPANY

By:   
Jon R. Nelsen, Attorney-in-Fact

**RECEIVED**  
**FEB 28 2003**  
DIV. OF OIL, GAS & MINING

NAME (PLEASE PRINT) WESTPORT OIL AND GAS COMPANY, L.P. David R. Dix		TITLE Agent and Attorney-in-Fact
SIGNATURE 		DATE 12/17/02

(This space for State use only)

Form 3160-5  
(August 1999)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS  
Do not use this form for proposals to drill or reenter an  
abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

5. Lease Serial No.  
SEE ATTACHED EXHIBIT "A"

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.  
SEE ATTACHED EXHIBIT "A"

9. API Well No.  
SEE ATTACHED EXHIBIT "A"

10. Field and Pool, or Exploratory Area

11. County or Parish, State  
UINTAH COUNTY, UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
WESTPORT OIL & GAS COMPANY, L.P.

3a. Address  
P.O. BOX 1148 VERNAL, UT 84078

3b. Phone No. (include area code)  
(435) 781-7023

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
SEE ATTACHED EXHIBIT "A"

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	SUCCESSOR OF
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	OPERATOR

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zone. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed if testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator determined that the site is ready for final inspection.

WESTPORT OIL & GAS COMPANY, L.P., IS CONSIDERED TO BE THE OPERATOR ON THE ATTACHED DESCRIBED LANDS AND IS RESPONSIBLE UNDER THE TERMS AND CONDITIONS OF THE LEASE FOR THE OPERATIONS CONDUCTED ON THE LEASED LANDS OR PORTIONS THEREOF, BOND COVERAGE FOR THIS WELL IS PROVIDED BY FEDERAL NATIONWIDE BOND NO. 158626364, EFFECTIVE FEBRUARY 1, 2002, AND BIA NATIONWIDE BOND NO. RLB0005239, EFFECTIVE FEBRUARY 10, 2003.

RECEIVED  
MAR 04 2003

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)  
CHERYL CAMERON

Title  
OPERATIONS

Signature

Date  
March 4, 2003

DIV. OF OIL, GAS & MINING

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.  
(Instructions on reverse)

**OPERATOR CHANGE WORKSHEET**

**ROUTING**

1. GLH
2. CDW ✓
3. FILE

**X Change of Operator (Well Sold)**

Designation of Agent/Operator

Operator Name Change

Merger

The operator of the well(s) listed below has changed, effective: **12-17-02**

<b>FROM: (Old Operator):</b>	<b>TO: ( New Operator):</b>
EL PASO PRODUCTION OIL & GAS COMPANY	WESTPORT OIL & GAS COMPANY LP
Address: 9 GREENWAY PLAZA	Address: P O BOX 1148
HOUSTON, TX 77064-0995	VERNAL, UT 84078
Phone: 1-(832)-676-5933	Phone: 1-(435)-781-7023
Account No. N1845	Account No. N2115

**CA No. Unit: NATURAL BUTTES**

<b>WELL(S)</b>						
NAME	SEC TWN RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
NBU 329-29E	29-09S-22E	43-047-32229	2900	FEDERAL	GW	P
CIGE 189-29-9-22	29-09S-22E	43-047-32863	2900	FEDERAL	GW	P
CIGE 219-29-9-22	29-09S-22E	43-047-32864	2900	STATE	GW	P
NBU 389-29E	29-09S-22E	43-047-33049	2900	FEDERAL	GW	P
NBU 341-29E	29-09S-22E	43-047-33055	2900	STATE	GW	P
CIGE 240	29-09S-22E	43-047-33207	2900	STATE	GW	P
NBU 323	30-09S-22E	43-047-34050	99999	FEDERAL	GW	APD
NBU 356	30-09S-22E	43-047-33232	2900	FEDERAL	GW	P
NBU 236	30-09S-22E	43-047-32994	2900	FEDERAL	GW	P
NBU 278	30-09S-22E	43-047-33011	2900	FEDERAL	GW	TA
NBU 184	30-09S-22E	43-047-32170	2900	FEDERAL	GW	P
NBU 186	30-09S-22E	43-047-32233	2900	FEDERAL	GW	P
COG NBU 78	30-09S-22E	43-047-31762	2900	FEDERAL	GW	P
NBU 137	30-09S-22E	43-047-31939	2900	STATE	GW	P
NBU 52J	30-09S-22E	43-047-30850	2900	FEDERAL	GW	P
NBU 49V	30-09S-22E	43-047-31249	2900	FEDERAL	GW	P
NBU 42-30-9-22	30-09S-22E	43-047-31735	2900	FEDERAL	GW	P
NBU 50N2	31-09S-22E	43-047-30835	2900	STATE	GW	P
NBU CIGE 5-31-9-22	31-09S-22E	43-047-30335	2900	STATE	GW	P
NBU CIGE 51D-31-9-22	31-09S-22E	43-047-30889	2900	STATE	GW	P

**OPERATOR CHANGES DOCUMENTATION**

Enter date after each listed item is completed

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 02/28/2003
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 03/04/2003
3. The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 03/06/2003
4. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
5. If **NO**, the operator was contacted contacted on: \_\_\_\_\_

6. (R649-9-2)Waste Management Plan has been received on: IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM-12/31/2003 BIA-12/5/02

8. **Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: 02/27/2003

9. **Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: N/A

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

**DATA ENTRY:**

1. Changes entered in the **Oil and Gas Database** on: 03/18/2003

2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 03/18/2003

3. Bond information entered in RBDMS on: N/A

4. Fee wells attached to bond in RBDMS on: N/A

**STATE WELL(S) BOND VERIFICATION:**

1. State well(s) covered by Bond Number: RLB 0005236

**FEDERAL WELL(S) BOND VERIFICATION:**

1. Federal well(s) covered by Bond Number: 158626364

**INDIAN WELL(S) BOND VERIFICATION:**

1. Indian well(s) covered by Bond Number: RLB 0005239

**FEE WELL(S) BOND VERIFICATION:**

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB 0005238

2. The **FORMER** operator has requested a release of liability from their bond on: N/A

The Division sent response by letter on: N/A

**LEASE INTEREST OWNER NOTIFICATION:**

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: N/A

**COMMENTS:**

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.  
Multiple Wells - see attached

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.  
891008900A

8. Well Name and No.  
Multiple Wells - see attached

9. API Well No.  
Multiple Wells - see attached

10. Field and Pool, or Exploratory Area  
Natural Buttes Unit

11. County or Parish, State  
Uintah County, UT

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
WESTPORT OIL & GAS COMPANY, L.P.

3a. Address  
P.O. BOX 1148 VERNAL, UT 84078

3b. Phone No. (include area code)  
(435) 781-

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
Multiple Wells - see attached

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Deepen
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Fracture Treat
	<input type="checkbox"/> Production (Start/Resume)
	<input type="checkbox"/> Reclamation
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Well Integrity
	<input type="checkbox"/> Change Plans
	<input type="checkbox"/> Plug and Abandon
	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Other
	<input type="checkbox"/> Convert to Injection
	<input type="checkbox"/> Plug Back
	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Water Disposal

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

Westport Oil & Gas requests a variance to Onshore Order No. 4, Part IIIC.a. requiring each sales tank be equipped with a pressure-vacuum thief hatch and/or vent line valve. The variance is requested as an economic analysis shows the value of the shrunk condensate will not payout the incremental cost of purchasing and maintaining the valve resulting in a loss of value over the producing life of the well.

The volume lost to shrinkage by dropping the tank pressure from 6 ozs. to 0 psig is shown to be 0.3% of the tank volume. This was determined by lab analysis of a representative sample from the field. The sample shrunk from 98.82% of original volume to 98.52% when the pressure was dropped. The average NBU well produces approximately 6 bbls condensate per month. The resulting shrinkage would amount to 0.56 bbls per month lost volume due to shrinkage. The value of the shrunk and lost condensate does not recoup or payout the cost of installing and maintaining the valves and other devices that hold the positive tank pressure. An economic run based on the loss and costs is attached.

Westport Oil & gas requests approval of this variance in order to increase the value of the well to the operator and the mineral royalty owners.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) J.T. Conley Title Operations Manager

Signature *J.T. Conley* Date 9-2-2003

INITIALS: *CHD*

COPY SENT TO OPERATOR Date: 9-16-03

SEP 10 2003

DIV. OF OIL, GAS & MINING

THIS SPACE FOR FEDERAL OR STATE USE

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_

Accepted by the Utah Division of Oil, Gas and Mining

Federal Approval of This Action is Necessary

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office \_\_\_\_\_ Date: 9/16/03

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

WELL	LEGALS	STFLEASENO	CANUMBER	APINO
NBU 149	5-10-22 NESE	UTU01191	891008900A	430473198200S1
NBU 150	9-10-22 SENW	UTU01196B	891008900A	430473199200S1
NBU 151	9-10-22 NWNW	UTU01196B	891008900A	430473199100S1
NBU 152	9-10-22 SESE	UTU01196D	891008900A	430473199000S1
NBU 153	11-10-22 SWNW	U01197A	891008900A	430473197500S1
NBU 154	26-9-21 NWSE	ML22934	891008900A	430473200300S1 ✓
NBU 155	31-9-22 SENW	ML23607	891008900A	430473200400S1 ✓
NBU 156	35-9-21 SWNW	U01194	891008900A	430473200500S1 ✓
NBU 157	32-9-22 SESW	ML22649	891008900A	430473200700S1 ✓
NBU 158	27-9-21 NWSE	U01194A	891008900A	430473199700S1 ✓
NBU 159SWD	35-9-21 NESW	U01194	891008900A	430473199600S1 ✓
NBU 161	32-9-22 SESE	ML22649	891008900A	430473202300S1 ✓
NBU 162	12-10-20 SENW	UTU4478	891008900A	430473206600S1
NBU 163	14-10-21 NENW	UTU465	891008900A	430473206900S1
NBU 164	3-10-22 NWSE	UTU01191A	891008900A	430473205500S1
NBU 165	3-10-22 NENW	UTU01191	891008900A	430473205700S1
NBU 166	28-9-21 SWSE	U05676	891008900A	430473206500S1
NBU 167	25-9-21 SESW	U01194	891008900A	430473205400S1 ✓
NBU 168	12-10-20 NWSW	UTU4478	891008900A	430473211700S1 ✓
NBU 169	12-10-20 SESW	UTU4478	891008900A	430473211800S1
NBU 170	4-10-22 NWNW	UTU01191A	891008900A	430473216900S1
NBU 171	5-10-22 SENE	UTU01191A	891008900A	430473211500S1
NBU 172	19-9-22 NENE	UTU0284	891008900A	430473219400S1
NBU 173	33-9-22 NWNE	UTU01191A	891008900A	430473211600S1
NBU 174	11-9-21 NWNW	UTU0141315	891008900A	430473219300S1
NBU 175	28-9-21 NENW	U05676	891008900A	430473214300S1
NBU 176	28-9-21 SWNW	U05676	891008900A	430473214400S1
NBU 177	29-9-21 NESE	UTU0581	891008900A	430473211200S1
NBU 178	30-9-21 NWNE	UTU0581	891008900A	430473212100S1
NBU 180	10-10-22 SWSE	UTU025187	891008900A	430473211300S1
NBU 181	9-9-21 SESW	UTU0576	891008900A	430473216100S1
NBU 182	11-9-21 SENW	UTU0141315	891008900A	430473216200S1
NBU 183	27-9-21 SWNW	U01194A	891008900A	430473212200S1 ✓
NBU 184	30-9-22 SESW	U463	891008900A	430473217000S1
NBU 185	3-10-22 SWNE	UTU01191A	891008900A	430473217100S1
NBU 186	30-9-22 SENE	U463	891008900A	430473223300S1
NBU 187	34-9-22 SESW	UTU0149077	891008900A	430473223000S1
NBU 188	10-10-22 SWSW	U01196C	891008900A	430473223400S1
NBU 189	23-9-21 SESW	UTU0149075	891008900A	430473223600S1
NBU 190	26-9-21 NWNE	U01194	891008900A	430473223200S1
NBU 191	15-9-21 SWSW	UTU010950A	891008900A	430473229800S1
NBU 192	22-9-21 NENW	UTU0147566	891008900A	430473229900S1
NBU 193	22-9-21 SWSW	UTU010950A	891008900A	430473230000S1
NBU 194	22-9-21 NESW	UTU010950A	891008900A	430473229600S1
NBU 195	11-9-21 NWNE	UTU0141317	891008900A	430473235500S1
NBU 198	22-9-21 NWSE	UTU010950A	891008900A	430473235700S1
NBU 199	9-9-21 SWSW	UTU0576A	891008900A	430473233700S1
NBU 200	19-9-22 NESE	UTU0284	891008900A	430473235900S1
NBU 201	9-9-21 SWNW	UTU0149767	891008900A	430473236400S1
NBU 202	8-9-21 NENE	UTU0149767	891008900A	430473233800S1
NBU 204	9-10-22 NWNE	UTU01196D	891008900A	430473234200S1
NBU 206	10-10-22 SWNW	U01196C	891008900A	430473234100S1
NBU 207	10-10-22 NENW	UTU69129	891008900A	430473232900S1 ✓
NBU 208	4-10-22 SESE	UTU01191	891008900A	430473234300S1
NBU 209	3-10-22 SWSW	UTU01191	891008900A	430473234500S1
NBU 210	10-10-22 NESW	U01196C	891008900A	430473234000S1
NBU 211	1-10-21 NWSW	U02842B	891008900A	430473233900S1
NBU 212	24-10-20 NENW	UTU4485	891008900A	430473239900S1
NBU 213	15-10-22 NWNW	UTU025187	891008900A	430473240100S1
NBU 214	27-9-21 NWSW	U01194	891008900A	430473246600S1 ✓
NBU 215	12-10-21 NWNW	UTU01190	891008900A	430473247100S1
NBU 216	15-9-21 NESW	UTU010950A	891008900A	430473248700S1

**Westport Oil & Gas, L.P.**  
**Project Economics Worksheet**

Instructions: Fill in blue lines with before and after project data. The evaluation results are shown below and graphed automatically at the bottom of the page. This sheet is protected to prevent accidental alteration of the formulas. See JTC for changes. OPX entered as annual costs and/or as unit OPX costs for \$/BF and \$/MCF

Project Name: **Condensate Shrinkage Economics**

Is this job a well pull or production rig job ???  N  (Y or N)

	BEFORE \$/Year	AFTER \$/Year	DIFFERENCE \$/Year
Gross Oil Revenue	\$1,088	\$1,099	\$11
Gross Gas Revenue	\$0	\$0	\$0
NGL Revenue	\$0	\$0	\$0
PULING UNIT SERVICE			\$0
WIRELINE SERVICE			\$0
SUBSURF EQUIP REPAIRS			\$0
COMPANY LABOR			\$0
CONTRACT LABOR	\$0	\$200	\$200
CONTR SERVICE			\$0
LEASE FUEL GAS	\$0	\$0	\$0
UTILITIES - ELECTRICITY	\$0	\$0	\$0
CHEMICAL TREATING			\$0
MATERIAL & SUPPLY	\$0	\$150	\$150
WATER & HAULING			\$0
ADMINISTRATIVE COSTS			\$0
GAS PLANT PROCESSING			\$0
<b>Totals</b>	<b>\$0</b>	<b>\$350</b>	<b>\$350</b>

Increased OPX Per Year

**Investment Breakdown:**

Cap/Exp Code	Cost, \$	Oil Price	
Capital \$	820/830/840 \$1,200	\$ 23.00	\$/BO
Expense \$	830/860 \$0	\$ 3.10	\$/MCF
Total \$	\$1,200	\$ -	\$/ HP / day
		\$ 2.00	\$/BF
		\$ 0.62	\$/MCF

**Production & OPX Detail:**


	Before		After		Difference	
Oil Production	0.192	BOPD	0.194	BOPD	0.002	BOPD
Gas Production	0	MCFPD	0	MCFPD	0	MCFPD
Wtr Production	0	BWPD	0	BWPD	0	BWPD
Horse Power		HP		HP	0	HP
Fuel Gas Burned		MCFPD		MCFPD	0	MCFPD

<p><b>Project Life:</b>                  Life = <input type="text" value="20.0"/> Years                  (Life no longer than 20 years)</p> <p><b>Internal Rate of Return:</b>                  After Tax IROR = <input type="text" value="#DIV/0!"/></p> <p><b>AT Cum Cashflow:</b>                  Operating Cashflow = <input type="text" value="(\$2,917)"/> (Discounted @ 10%)</p> <p><b>Reserves:</b>                  Oil Reserves = <input type="text" value="6"/> BO                  Gas Reserves = <input type="text" value="0"/> MCF                  Gas Equiv Reserves = <input type="text" value="38"/> MCFE</p>	<p><b>Payout Calculation:</b></p> <p>Payout = <math>\frac{\text{Total Investment}}{\text{Sum(OPX + Incremental Revenue)}} = 1</math></p> <p>Payout occurs when total AT cashflow equals investment                  See graph below, note years when cashflow reaches zero</p> <p>Payout = <input type="text" value="NEVER"/> Years or <input type="text" value="#VALUE!"/> Days</p>
--	--

**Notes/Assumptions:**

An average NBU well produces 0.192 Bopd with no tank pressure. The production is increased to 0.194 Bopd if 6 ozs of pressure are placed on the tank. The increased production does not payout the valve cost or the estimated annual maintenance costs.

Project: Condensate Shrinkage Economics

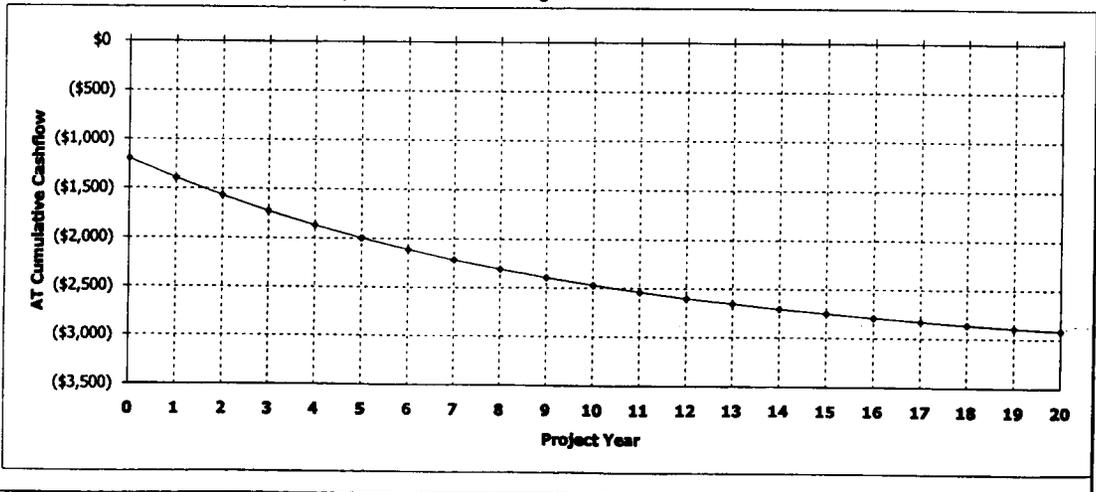

**Westport Oil and Gas, Inc.**

**NBU/Ouray Field**

RFL 2003-022

**COMPARISON OF FLASH BACK PRESSURES**

Calculated by Characterized Equation-of-State

Flash Conditions		Gas/Oil Ratio (scf/STbbl) (A)	Specific Gravity of Flashed Gas (Air=1.000)	Separator Volume Factor (B)	Separator Volume Percent (C)
psig	°F				

**Calculated at Laboratory Flash Conditions**

80	70			1.019	
0	122	30.4	0.993	1.033	101.37%
0	60	0.0	—	1.000	98.14%

**Calculated Flash with Backpressure using Tuned EOS**

80	70			1.015	
6.0 oz	65	24.6	0.777	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
4.0 oz	65	24.7	0.778	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
2.0 oz	65	24.7	0.779	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
0	65	24.8	0.780	1.003	98.82%
0	60	0.0	—	1.000	98.52%

(A) Cubic Feet of gas at 14.696 psia and 60 °F per Barrel of Stock Tank Oil at 60 °F.

(B) Barrels of oil at indicated pressure and temperature per Barrel of Stock Tank Oil at 60 °F.

(C) Oil volume at indicated pressure and temperature as a percentage of original saturated oil volume.

Note: Bubblepoint of sample in original sample container was 80 psig at 70° F with 1 cc water

Division of Oil, Gas and Mining  
**OPERATOR CHANGE WORKSHEET**

<b>ROUTING</b>
1. DJJ
2. CDW

**X Change of Operator (Well Sold)**

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:		<b>1/6/2006</b>
<b>FROM:</b> (Old Operator): N2115-Westport Oil & Gas Co., LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024	<b>TO:</b> ( New Operator): N2995-Kerr-McGee Oil & Gas Onshore, LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024	

WELL NAME	CA No.	Unit:	NATURAL BUTTES UNIT					
	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS

**OPERATOR CHANGES DOCUMENTATION**

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- a. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- b. If **NO**, the operator was contacted on:
- 5a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- 5b. Inspections of LA PA state/fee well sites complete on: n/a 3 LA wells & all PA wells transferred
- 5c. Reports current for Production/Disposition & Sundries on: ok
- 6. Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet
- 7. Federal and Indian Units:**  
The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006
- 8. Federal and Indian Communization Agreements ("CA"):**  
The BLM or BIA has approved the operator for all wells listed within a CA on: n/a
- 9. Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on:

**DATA ENTRY:**

- Changes entered in the **Oil and Gas Database** on: 5/15/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
- Bond information entered in RBDMS on: 5/15/2006
- Fee/State wells attached to bond in RBDMS on: 5/16/2006
- Injection Projects to new operator in RBDMS on: \_\_\_\_\_
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

**BOND VERIFICATION:**

- Federal well(s) covered by Bond Number: CO1203
- Indian well(s) covered by Bond Number: RLB0005239
- (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- a. The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG  
The Division sent response by letter on: \_\_\_\_\_

**LEASE INTEREST OWNER NOTIFICATION:**

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

**COMMENTS:**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
**KERR-McGEE OIL & GAS ONSHORE LP**

3a. Address  
**1368 SOUTH 1200 EAST VERNAL, UT 84078**

3b. Phone No. (include area code)  
**(435) 781-7024**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**SEE ATTACHED**

5. Lease Serial No.  
**MULTIPLE LEASES**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.  
**MUTIPLE WELLS**

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State  
**UINTAH COUNTY, UTAH**

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>CHANGE OF OPERATOR</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006. KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

**RECEIVED**  
**MAY 10 2006**

*BLM BOND = C01203*  
*BIA BOND = RLB0005239*

**APPROVED 5/16/06**

DIV. OF OIL, GAS & MINING

*Earlene Russell*  
**Division of Oil, Gas and Mining**  
**Earlene Russell, Engineering Technician**

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) <b>RANDY BAYNE</b>	Title <b>DRILLING MANAGER</b>
Signature <i>Randy Bayne</i>	Date <b>May 9, 2006</b>

**THIS SPACE FOR FEDERAL OR STATE USE**

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
**WESTPORT OIL & GAS COMPANY L.P.**

3a. Address  
**1368 SOUTH 1200 EAST VERNAL, UT 84078**

3b. Phone No. (include area code)  
**(435) 781-7024**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**SEE ATTACHED**

5. Lease Serial No.  
**MULTIPLE LEASES**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.  
**MUTIPLE WELLS**

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State  
**UINTAH COUNTY, UTAH**

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other <b>CHANGE OF OPERATOR</b>

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

**APPROVED** 5/16/06  
*Earlene Russell*  
 Division of Oil, Gas and Mining  
 Earlene Russell, Engineering Technician

RECEIVED  
 MAY 10 2006

DIV OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) <b>BRAD LANEY</b>	Title <b>ENGINEERING SPECIALIST</b>
Signature	Date <b>May 9, 2006</b>

THIS SPACE FOR FEDERAL OR STATE USE

Approved by <i>Brad Laney</i>	Title	Date <b>5-9-06</b>
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



## United States Department of the Interior

BUREAU OF LAND MANAGEMENT  
Colorado State Office  
2850 Youngfield Street  
Lakewood, Colorado 80215-7076

IN REPLY REFER TO:

CO922 (MM)  
3106  
COC017387 et. al.

March 23, 2006

### NOTICE

Kerr-McGee Oil & Gas Onshore L.P. :  
1999 Broadway, Suite 3700 : Oil & Gas  
Denver, CO 80202 :

#### Merger/Name Change - Recognized

On February 28, 2006 this office received acceptable evidence of the following mergers and name conversion:

Kerr-McGee Oil & Gas Onshore L.P., a Delaware Limited Partnership, and Kerr-McGee Oil & Gas Onshore LLC, a Delaware Limited Partnership merger with and into Westport Oil and Gas Company L.P., a Delaware Limited Partnership, and subsequent Westport Oil & Gas Company L.P. name conversion to Kerr-McGee Oil & Gas Onshore L.P.

For our purposes the merger and name conversion was effective January 4, 2006, the date the Secretary of State of Delaware authenticated the mergers and name conversion.

Kerr-McGee Oil & Gas Onshore L.P. provided a list of oil and gas leases held by the merging parties with the request that the Bureau of Land Management change all their lease records from the named entities to the new entity, Kerr-McGee Oil & Gas Onshore L.P. In response to this request each state is asked to retrieve their own list of leases in the names of these entities from the Bureau of Land Management's (BLM) automated LR2000 data base.

The oil and gas lease files identified on the list provided by Kerr-McGee Oil & Gas Onshore L.P. have been updated as to the merger and name conversion. We have not abstracted the lease files to determine if the entities affected by the acceptance of these documents holds an interest in the lease, nor have we attempt to identify leases where the entity is the operator on the ground that maintains vested record title or operating rights interests. If additional documentation, for change of operator, is required you will be contacted directly by the appropriate Field Office. The Mineral Management Services (MMS) and other applicable BLM offices were notified of the merger with a copy of this notice

Please contact this office if you identify additional leases where the merging party maintains an interest, under our jurisdiction, and we will document the case files with a copy of this notice. If the leases are under the jurisdiction of another State Office that information will be forwarded to them for their action.

Three riders accompanied the merger/name conversion documents which will add Kerr-McGee Oil and Gas Onshore LLC as a principal to the 3 Kerr-McGee bonds maintained by the Wyoming State Office. These riders will be forward to them for their acceptance.

The Nationwide Oil & Gas Continental Casualty Company Bond #158626364 (BLM Bond #CO1203), maintained by the Colorado State Office, will remain in full force and effect until an assumption rider is accepted by the Wyoming State Office that conditions their Nationwide Safeco bond to accept all outstanding liability on the oil and gas leases attached to the Colorado bond.

If you have questions about this action you may call me at 303.239.3768.

/s/Martha L. Maxwell  
Martha L. Maxwell  
Land Law Examiner  
Fluid Minerals Adjudication

**Attachment:**

List of OG Leases to each of the following offices:

MMS MRM, MS 357B-1

WY, UT, NM/OK/TX, MT/ND, WY State Offices

CO Field Offices

Wyoming State Office

Rider #1 to Bond WY2357

Rider #2 to Bond WY1865

Rider #3 to Bond WY1127



# United States Department of the Interior



BUREAU OF LAND MANAGEMENT  
Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155  
<http://www.blm.gov>

IN REPLY REFER TO:  
3106  
(UT-922)

March 27, 2006

## Memorandum

To: Vernal Field Office

From: Chief, Branch of Fluid Minerals

Subject: Merger Approval

Attached is an approved copy of the merger recognized by the Bureau of Land Management, Colorado State Office. We have updated our records to reflect the merger from Westport Oil and Gas Company L.P. into Kerr-McGee Onshore Oil and Gas Company. The merger was approved effective January 4, 2006.

Chief, Branch of  
Fluid Minerals

## Enclosure

Approval letter from BLM COSO (2 pp)

cc: MMS, Reference Data Branch, James Sykes, PO Box 25165, Denver CO 80225  
State of Utah, DOGM, Attn: Earlene Russell, PO Box 145801, SLC UT 84114  
Teresa Thompson  
Joe Incardine  
Connie Seare  
Dave Mascarenas  
Susan Bauman

RECEIVED

MAR 28 2006

DIV. OF OIL, GAS & MINERAL

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> U-463
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b> NATURAL BUTTES
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> NBU 186
<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	<b>9. API NUMBER:</b> 43047322330000
<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6007 Ext
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1534 FNL 1136 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SENE Section: 30 Township: 09.0S Range: 22.0E Meridian: S	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES  <b>COUNTY:</b> UINTAH  <b>STATE:</b> UTAH

**11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 3/5/2010	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:	<input checked="" type="checkbox"/> <b>CHANGE WELL STATUS</b>	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: _____

**12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.**

The operator requests authorization to shut-in the subject well due to operational issues. The subject well location last produced on 2/6/2010. The operator is currently working on getting the subject well location back on sales. We will shut-in the subject well on 3/5/2010.

**Accepted by the Utah Division of Oil, Gas and Mining**

Date: March 08, 2010

By: *Derek Quist*

<b>NAME (PLEASE PRINT)</b> Andy Lytle	<b>PHONE NUMBER</b> 720 929-6100	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A		<b>DATE</b> 3/5/2010

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> U-463
---	--

<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b> NATURAL BUTTES
--	--

<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> NBU 186
------------------------------------	--

<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	<b>9. API NUMBER:</b> 43047322330000
---	---

<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6007 Ext	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES
---	--	--

<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1534 FNL 1136 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SENE Section: 30 Township: 09.0S Range: 22.0E Meridian: S	<b>COUNTY:</b> UINTAH  <b>STATE:</b> UTAH
---	---

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 3/14/2010	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input checked="" type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: _____

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.  
 THIS WELL RETURNED TO PRODUCTION ON 3/14/2010.

**Accepted by the**  
**Utah Division of**  
**Oil, Gas and Mining**  
**FOR RECORD ONLY**  
 March 17, 2010

<b>NAME (PLEASE PRINT)</b> Andy Lytle	<b>PHONE NUMBER</b> 720 929-6100	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A		<b>DATE</b> 3/17/2010

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> U-463
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b> NATURAL BUTTES
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> NBU 186
<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	<b>9. API NUMBER:</b> 43047322330000
<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6007 Ext
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1534 FNL 1136 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SENE Section: 30 Township: 09.0S Range: 22.0E Meridian: S	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES  <b>COUNTY:</b> UINTAH  <b>STATE:</b> UTAH

**11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 3/5/2010	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:	<input checked="" type="checkbox"/> <b>CHANGE WELL STATUS</b>	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: _____

**12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.**

The operator requests authorization to shut-in the subject well due to operational issues. The subject well location last produced on 2/6/2010. The operator is currently working on getting the subject well location back on sales. We will shut-in the subject well on 3/5/2010.

**Accepted by the  
Utah Division of  
Oil, Gas and Mining**

Date: March 08, 2010

By: *Derek Quist*

<b>NAME (PLEASE PRINT)</b> Andy Lytle	<b>PHONE NUMBER</b> 720 929-6100	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A		<b>DATE</b> 3/5/2010

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> U-463
---	--

<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b> NATURAL BUTTES
--	--

<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> NBU 186
------------------------------------	--

<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	<b>9. API NUMBER:</b> 43047322330000
---	---

<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6007 Ext	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES
---	--	--

<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1534 FNL 1136 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SENE Section: 30 Township: 09.0S Range: 22.0E Meridian: S	<b>COUNTY:</b> UINTAH  <b>STATE:</b> UTAH
---	---

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 3/14/2010	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input checked="" type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: _____

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.  
 THIS WELL RETURNED TO PRODUCTION ON 3/14/2010.

**Accepted by the**  
**Utah Division of**  
**Oil, Gas and Mining**  
**FOR RECORD ONLY**  
 March 17, 2010

<b>NAME (PLEASE PRINT)</b> Andy Lytle	<b>PHONE NUMBER</b> 720 929-6100	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A		<b>DATE</b> 3/17/2010

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> U-463
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b> NATURAL BUTTES
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> NBU 186
<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	<b>9. API NUMBER:</b> 43047322330000
<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6515 Ext
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1534 FNL 1136 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SENE Section: 30 Township: 09.0S Range: 22.0E Meridian: S	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES  <b>COUNTY:</b> UINTAH  <b>STATE:</b> UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 11/9/2011  <input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:  <input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:  <input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input checked="" type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 50px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The Operator requests to plug back and abandon the existing Wasatch perforations, and recomplete the subject well in the Green River formation. Please see attached procedure for details. Thank you.

**Accepted by the Utah Division of Oil, Gas and Mining**

Date: 12/06/2011

By: *Derek Quist*

<b>NAME (PLEASE PRINT)</b> Jaime Scharnowske	<b>PHONE NUMBER</b> 720 929-6304	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A	<b>DATE</b> 11/9/2011	



**The Utah Division of Oil, Gas, and Mining**

- State of Utah
- Department of Natural Resources

**Electronic Permitting System - Sundry Notices**

**Sundry Conditions of Approval Well Number 43047322330000**

**Authorization: Board Cause No. 197-10.**

# Greater Natural Buttes Unit



**NBU 186**

**PLUGBACK WASATCH AND COMPLETE GREEN RIVER**

**DATE:11/2/2011**

**API#:4304732233**

**AFE#:**

**USER ID:CKW374** (Frac Invoices Only)

**COMPLETIONS ENGINEER:** James Page, Denver, CO  
720-929-6747 (Office)  
303-501-2731 (Cell)

**SIGNATURE:**

**ENGINEERING MANAGER: JEFF DUFRESNE**

**SIGNATURE:**

**REMEMBER SAFETY FIRST!**

**Name:** NBU 186**Location:** SE NE SEC 30 T9S R22E**LAT: 40.01007 LONG: -109.47659 COORDINATE: NAD27 (Surface Location)****Uintah County, UT****Date:** 11/2/2011**ELEVATIONS:** 4942' GL 4954' KB *Frac Registry TVD: 6225'***TOTAL DEPTH:** 6225'**PBTD:** 6177'**SURFACE CASING:** 8 5/8", 24# K-55 @ 270 '**PRODUCTION CASING:** 5 1/2", 17# J-55 @ 6225 '

Marker JT: 4552-4568'

**CBL TOC' 208****TUBULAR PROPERTIES:**

	BURST (psi)	COLLAPSE (psi)	DRIFT DIA. (in.)	CAPACITIES	
				(bbl/ft)	(gal/ft)
2 3/8" 4.7# J-55 tbg	7,700	8,100	1.901"	0.00387	0.1624
5 1/2" 17# J-55 (See above)	5320	4910	4.767"	0.0232	0.9764
2 7/8" by 5 1/2" Annulus				0.0152	0.6392

**TOPS:**

1404' Green River Top  
 1629' Bird's Nest Top  
 2140' Mahogany Top  
 4715' Wasatch Top

**BOTTOMS:**

\*Based on latest geological interpretation

**GENERAL:**

- A minimum of **8** tanks (cleaned lined 500 bbl) of recycled water will be required. Note: Use biocide in tanks and the water needs to be at least 45°F at pump time.
- All perforation depths are from Halliburton Induction-Density-Neutron log dated 7/8/92
- **2** fracturing stages required for coverage.
- Procedure calls for **2** CBP's (**8000** psi) and 1 CIBP (10,000 psi)
- Calculate open perforations after each breakdown. If less than 60% of the perforations appear to be open, ball out with 15% HCl.
- Pump scale inhibitor at 3 gpt (in pad and until 1.25 ppg ramp up is reached) and 10 gpt in all flushes except the final stage. Remember to pre-load the casing with scale inhibitor for the very first stage with 10 gpt.
- 20/40 mesh Ottawa sand, **Slickwater frac.**
- Maximum surface pressure **4000** psi.
- CBL by Cutters 9/1/1992

- Flush volumes are the sum of slick water and acid used during displacement (include scale inhibitor as mentioned above). Stage acid and scale inhibitor if necessary to cover the next perforated interval.
- **Call flush at 0 PPG @ inline densimeters. Slow to 5 bbl/min over last 10-20 bbls of flush. Flush to top perf.**
- **If distance between plug and top perf of previous stage is less than 50', it is considered to be tight spacing - over flush stage by 5 bbls (from top perf)**
- Originally completed on 9/1992 – 220k lbs 20/40 – 104,000 gal/gel
- Tubing at 4852'
- **Note HCL increased to 500 gal/stage**

### Existing Perforations:

Depth	SPF	Total Shots
4897	1	1
4905	1	1
4909	1	1
5108	1	1
5564	1	1
5976	1	1
5983	1	1
5989	1	1
6125	1	1
6133	1	1
	Total	<b>10</b>

### Relevant History:

Drilled June 1992, cemented 7/10/1992 cement returns to surface.

Originally Completed September 1992

Well had downtime due to winter operations and low MBX. The well currently has no operational issues and is doing +20mcf/day. The well has depleted pressure (tbg 146#, csg. 158#) and production varies greatly with line pressure. Recommend TA or developing up hole potential.

### **PROCEDURE: (If using any chemicals for pickling tubing or H2S Scavenging, have MSDS for all chemicals prior to starting work.)**

1. MIRU. Control well with recycled water and biocide as required. ND WH, NU BOP's and test.
2. POOH w/ tubing @ 4852'

3. PLUG #1, ISOLATE WAS PERFORATIONS (4897' – 6133'): RIH W/ 5 1/2" CIBP. SET @ ~4880'. RELEASE CBP, PUH 10', BRK CIRC W/ FRESH WATER. PRESSURE TEST CASING TO 500 PSI. INFORM ENGINEERING IF IT DOESN'T TEST. DISPLACE A MINIMUM OF 15 SX / 17.2 CUFT. ON TOP OF PLUG. PUH ABOVE TOC (~4750'). REVERSE CIRCULATE W/ TREATED FRESH WATER.
4. ND BOPs and NU frac valves. Test frac valves and casing to 1000 for 15 minutes and to 4000 psi for 30 minutes. As per standard operating procedure install steel blowdown line to reserve pit from 5-1/2" X 8-5/8" annulus. Lock **OPEN** the Braden head valve. Annulus will be monitored throughout stimulation. If release occurs, stimulation will be shut down. Well conditions will be assessed and actions taken as necessary to secure the well. UDOGM will be notified if a release to the annulus occurs.
5. Perf the following with 3-3/8" gun, 23 gm, 0.36"hole:
 

Zone	From	To	spf	# of shots
Green River	4571	4572	3	3
Green River	4612	4614	3	6
Green River	4654	4657	3	9
Green River	4691	4692	3	3
Green River	4702	4703	3	3
6. Breakdown perfs and establish injection rate (include scale inhibitor in fluid). Spot 500 gals of 15% HCL and let soak 5-10 min. Fracture as outlined in Stage 1 on attached listing. Under-displace to ~4571' and trickle 500gal 15%HCL w/ scale inhibitor in flush.
7. Set 8000 psi CBP at ~4237'. Perf the following 3-3/8" gun, 23 gm, 0.36"hole:
 

Zone	From	To	spf	# of shots
Green River	4005	4007	3	6
Green River	4032	4034	3	6
Green River	4186	4187	4	4
Green River	4205	4207	4	8
8. Breakdown perfs and establish injection rate. Fracture as outlined in Stage 2 on attached listing. Under-displace to ~4005' and flush only with recycled water.
9. Set 8000 psi CBP at ~3955'
10. ND Frac Valves, NU and Test BOPs.
11. TIH with 3 7/8" bit, pump off sub, SN and tubing.
12. Drill plugs and clean out to 4730'. Shear off bit and land tubing at  $\pm 3950'$  unless indicated otherwise by the well's behavior.
13. Clean out well with foam and/or swabbing unit until steady flow has been established from completion.
14. RDMO

**For design questions, please call  
James Page, Denver, CO  
720-929-6747 (Office)  
303-501-2731 (Cell)**

**For field implementation questions, please call  
Jeff Samuels, Vernal, UT  
(435)-781-7046 (Office)**

NOTES:

**If using any chemicals for pickling tubing or H<sub>2</sub>S Scavenging, have MSDS for all chemicals prior to starting work**

**Verify that the Braden head valve is locked OPEN.  
Note HCL increased to 500 gal/stage**

Acid Pickling and H2S Procedures (If Required)

**\*\*PROCEDURE FOR PUMPING ACID DOWN TBG**

WHEN FINDING SCALE IN TUBING THAT IS ACID SOLUBLE, ENSURE THAT PLUNGER EQUIPMENT IS REMOVED AND ABLE TO PUMP DOWN TBG. INSTALL A 'T' IN PUMP LINE W/2" VALVE THAT NALCO CAN TIE INTO. HAVE 60 BBL 2% KCL MIXED W/ 10-15 GAL H2S SCAVENGER IN RIG FLAT TANK. (WE USED THE RIG FLAT TANK FOR MIXING CHEMICAL SO WE DIDN'T HAVE THE CHEMICAL IN ALL FLUIDS ON LOCATION, ONLY WHAT WE NEEDED TO PUMP DOWN HOLE)

1. PUMP 5-10 BBL 2% KCL DOWN TBG (NALCO CANNOT PUMP AGAINST PRESSURE)
2. NALCO WILL PUMP 3 DRUMS HCL (31%) INTO PUMP LINE.
3. FLUSH BEHIND ACID WITH 10-15 BBL 2% KCL
4. PUMP 2—30 BBL 2% W/ H2S SCAVENGER DOWN TBG.
5. PUMP REMAINDER OF 2% W/ H2S SCAVENGER DOWN CASING AND SHUT WELL IN FOR MINIMUM OF 2 HRS.
6. OVER DISPLACE DOWN TBG AND CSG TO FLUSH ACID AND SCAVENGER INTO FORMATION
7. MONITOR TUBING FOR FLOW AND CASING FOR H2S NOW AS POOH W/ TUBING.

**\*\* PROCEDURE FOR PUMPING H2S SCAVENGER WITHOUT ACID**

PRIOR TO RIG MOVING ON OR AS RIG PULLS ONTO LOCATION. TEST CASING, TUBING AND SEPARATOR FOR H2S. IF FOUND MAKE SURE THAT PLUNGER SYSTEM IS REMOVED (IT IS POSSIBLE TO PUMP AROUND PLUNGERS BUT SOME WILL HAVE A STANDING VALVE IN SEATING NIPPLE).

1. MIX 10-15 GAL H2S SCAVENGER WITH 60-100 BBL 2% KCL IN RIG FLAT TANK.
2. PUMP 25 BBL MIXTURE DOWN TUBING AND REST DOWN CASING. SHUT WELL IN FOR 2 HOURS.
3. IF WELL HAS PRESSURE AFTER 2 HOURS – RETEST CASING AND TUBING FOR H2S.
4. FLUSH TUBING AND CASING PUSHING H2S SCAVENGER INTO FORMATION.
5. MONITOR TUBING FOR FLOW AND CASING FOR H2S NOW AS POOH W/ TUBING.

\*\* As per APC standard operating procedure, APC foreman will verify ALL volumes pumped and record on APC Volume Report Form

Key Contact information

Completion Engineer

James Page: 720-929-6747, 303-501-2731

Production Engineer

Brad Laney: 435/781-7031, 435/828-5469

Jordan Portillo: 435/781-9785, 435/828-6221

Laura M. Wellman: 435/781-9748, 435/322-0118

Completion Supervisor Foreman

Jeff Samuels: 435-828-6515, 435-781-7046

Completion Manager

Jeff Dufresne: 720-929-6281, 303-241-8428

Vernal Main Office

435-789-3342

Emergency Contact Information—Call 911

Vernal Regional Hospital Emergency: 435-789-3342

Police: (435) 789-5835

Fire: 435-789-4222

Name NBU 186

Perforation and CBP Summary

Stage	Zones	Perforations		SPF	Holes	Fracture Coverage			
		Top, ft	Bottom, ft						
1	Green River	4571	4572	3	3	4569	to	4574	
	Green River	4612	4614	3	6	4611	to	4616	
	Green River	4654	4657	3	9	4644	to	4673	
	Green River	4691	4692	3	3	4689	to	4698	
	Green River	4702	4703	3	3	4700	to	4704	
	# of Perfs/stage				24	CBP DEPTH	4,237		
2	Green River	4005	4007	3	6	4000	to	4009	
	Green River	4032	4034	3	6	4030	to	4038	
	Green River	4186	4187	4	4	4185	to	4188	
	Green River	4205	4207	4	8	4204	to	4212	
	# of Perfs/stage				24	CBP DEPTH	3,955		
	Totals				48				

Service Company Supplied Chemicals - Job Totals

Friction Reducer	65	gals @	0.5	GPT
Surfactant	130	gals @	1.0	GPT
Clay Stabilizer	130	gals @	1.0	GPT
15% Hcl	1000	gals @	500	gal/stg
Iron Control for acid	5	gals @	5.0	GPT of acid
Surfactant for acid	1	gals @	1.0	GPT of acid
Corrosion Inhibitor for acid	2	gals @	2.0	GPT of acid

Third Party Supplied Chemicals Job Totals - Include Pumping Charge if Applicable

Scale Inhibitor	250	gals pumped per schedule above	
Biocide	65	gals @	0.5 GPT



STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>		<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> U-463
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>
		<b>7. UNIT or CA AGREEMENT NAME:</b> NATURAL BUTTES
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> NBU 186	
<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	<b>9. API NUMBER:</b> 43047322330000	
<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6100	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1534 FNL 1136 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SENE Section: 30 Township: 09.0S Range: 22.0E Meridian: S	<b>COUNTY:</b> UINTAH	
	<b>STATE:</b> UTAH	
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
<b>TYPE OF SUBMISSION</b>	<b>TYPE OF ACTION</b>	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:  <input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 7/10/2013  <input type="checkbox"/> SPUD REPORT Date of Spud:  <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input checked="" type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> WILDCAT WELL DETERMINATION <input type="checkbox"/> OTHER	
	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.		
<p>The subject well was temporarily abandoned to drill and complete the NBU 922-30H Pad. On 7/10/2013 well work had completed drilling out plugs and returned the well to production on 7/22/2013. Please see attached daily summary.</p>		
<p><b>Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY February 28, 2014</b></p>		
<b>NAME (PLEASE PRINT)</b> Teena Paulo	<b>PHONE NUMBER</b> 720 929-6236	<b>TITLE</b> Staff Regulatory Specialist
<b>SIGNATURE</b> N/A	<b>DATE</b> 2/28/2014	

**US ROCKIES REGION**  
**Operation Summary Report**

Well: NBU 186		Spud Date:							
Project: UTAH-UINTAH			Site: NBU 922-30H PAD				Rig Name No: SWABBCO 6/6		
Event: ABANDONMENT			Start Date: 7/8/2013			End Date: 7/10/2013			
Active Datum: RKB @0.00usft (above Mean Sea Level)				UWI: NBU 186					
Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation	
7/9/2013	7:00 - 7:30	0.50	PROD	23		P		MIRU	
	7:30 - 17:00	9.50	PROD	02	F	P		MIRU, NDWH, NU BOP'S, PU 5 1/2" BIT & BHA, TBG, TIH TO 4750' TAG CEMENT, 152 JTS, TEST BOP'S, MILL CEMENT PLUG, TAG CIBP, MILL CIBP, TIH TO 6131', TAG FILL, SWIFN, FOAM UNIT BROKE DWN	
7/10/2013	7:00 - 7:30	0.50	RUNTBG	23		P		POBS	
	7:30 - 11:00	3.50	RUNTBG	06	A	P		RU FOAM UNIT, PWR SWIVAL, C/O OUT TO 6156' HIT SOLID, BREAK CIRC, POOH LAY DWN 13 JTS, LAND TBG, 184 JTS, 5770.92', ND BOP'S, NUWH, POBS, TURN TO PROD, RDMO	