

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK
 DRILL DEEPEN

b. TYPE OF WELL
 OIL WELL GAS WELL OTHER SINGLE ZONE MULTIPLE ZONE

2. NAME OF OPERATOR
 Coastal Oil & Gas Corporation

3. ADDRESS AND TELEPHONE NO.
 P.O. Box 749, Denver, CO 80201-0749 (303) 573-4476

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. *)
 At surface
 24' 817' FSL & 2620' 198' FWL (SESW)
 At proposed prod. zone

5. LEASE DESIGNATION AND SERIAL NO.
 U-0149078

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
 N/A

7. UNIT AGREEMENT NAME
 Natural Buttes Unit

8. FARM OR LEASE NAME, WELL NO.
 CIGE 226-3-10-21

9. API WELL NO.

10. FIELD AND POOL, OR WILDCAT
 Natural Buttes Field

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
 Section 3-T10S-R21E

12. COUNTY OR PARISH
 Uintah

13. STATE
 Utah

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*
 Approximately 18.7 miles north of Ouray, Utah

15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any) N/A

16. NO. OF ACRES IN LEASE
 648.44

17. NO. OF ACRES ASSIGNED TO THIS WELL
 N/A

18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT. See Topo Map C

19. PROPOSED DEPTH
 6900'

20. ROTARY OR CABLE TOOLS
 Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)
 Ungraded GR = 5058.4'

22. APPROX. DATE WORK WILL START*
 Upon Approval


23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
See NBU SOP				
Drilling Program				

Coastal Oil & Gas Corporation proposes to drill a well to the proposed TD as stated above. If productive, casing will be run and the well completed. If dry, the well will be plugged and abandoned as per BLM and State of Utah requirements.

See the attached Drilling Program and Multi-point Surface Use & Operations Plan.

Coastal Oil & Gas Corporation is considered to be the operator of the subject well. It agrees to be responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided for by: State of Utah Bond #102103 and BLM Nationwide Bond #U605382-9.



IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED Bonnie Carson TITLE Sr. Environmental Analyst DATE 9/3/97

(This space for Federal or State office use)

PERMIT NO. 43-047-32995 APPROVAL DATE _____

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY John R. Day TITLE Associate Director DATE 11/19/97
*See Instructions On Reverse Side Utah DOGM

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

T10S, R21E, S.L.B.&M.

COASTAL OIL & GAS CORP.

Well location, CIGE #226-3-10-21, located as shown in the SE 1/4 SW 1/4 of Section 3, T10S, R21E, S.L.B.&M., Uintah County, Utah.


N89°50'W - 39.77 (G.L.O.)

S88°21'W - 40.91 (G.L.O.)


T9S
T10S

BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

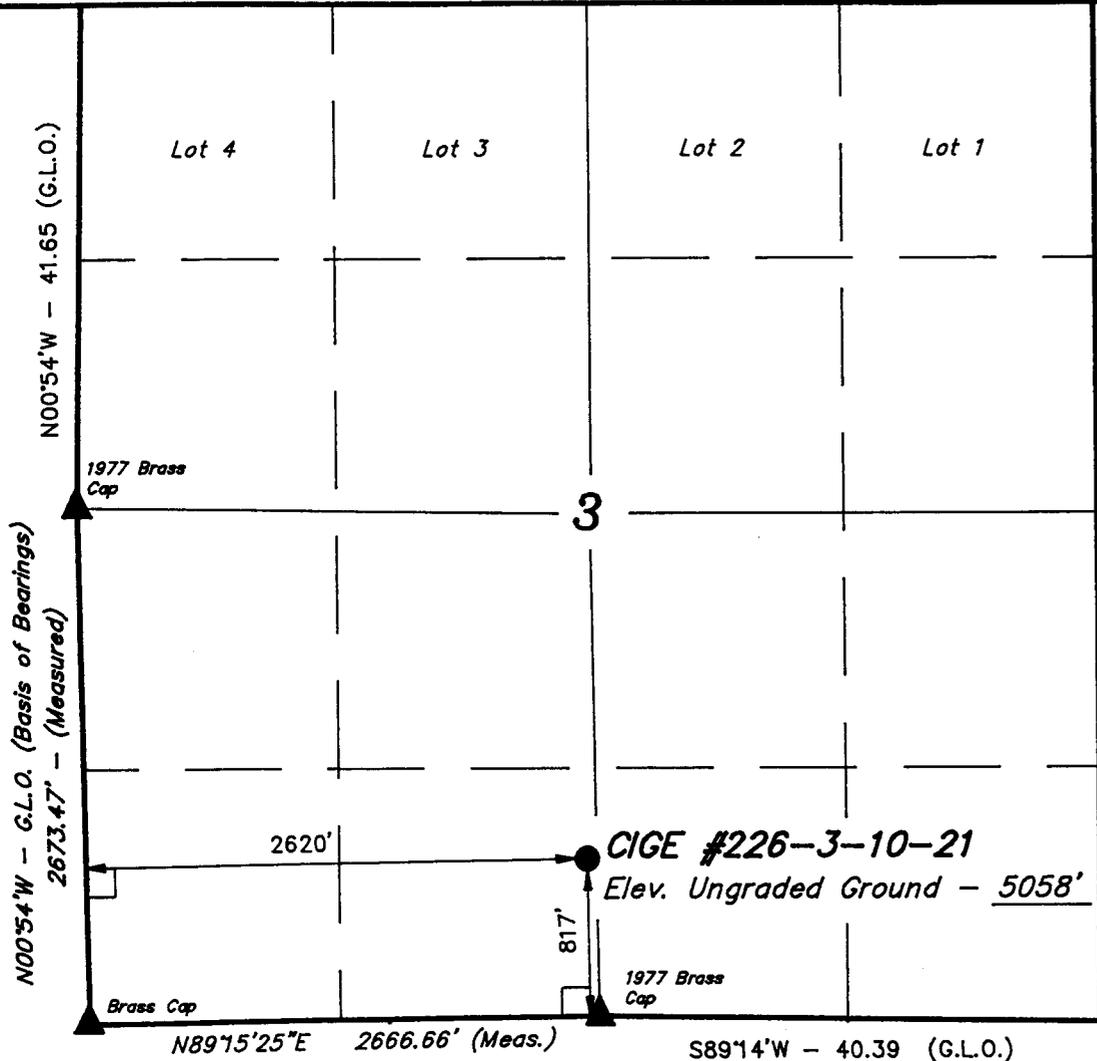

N00°57'W - 82.19 (G.L.O.)

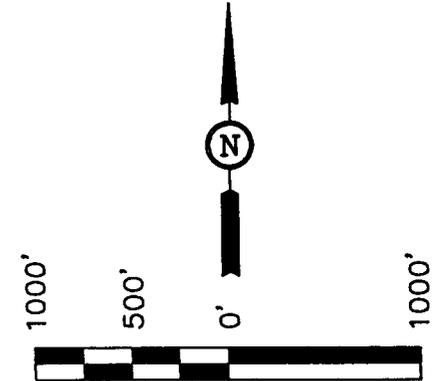

SCALE

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Robert A. [Signature]
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 161319
 STATE OF UTAH

UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (801) 789-1017

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

SCALE 1" = 1000'	DATE SURVEYED: 2-10-97	DATE DRAWN: 2-14-97
PARTY B.B. D.R. C.B.T.	REFERENCES G.L.O. PLAT	
WEATHER COOL	FILE COASTAL OIL & GAS CORP.	

**CIGE #226-3-10-21
817' FSL & 2620' FWL
SE/SW, SECTION 3-T10S-R21E
UINTAH COUNTY, UTAH
LEASE NUMBER: U-0149078**

**ONSHORE ORDER NO. 1
COASTAL OIL & GAS CORPORATION**

DRILLING PROGRAM

1. Estimated Tops of Important Geologic Markers:

Formation	Depth
Duchesne River/Uinta	Surface
Green River	1,400'
Wasatch	4,610'
Total Depth	6,900'

2. Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

Substance	Formation	Depth
Oil/Gas	Green River	1,400'
	Wasatch	4,610'
Water	N/A	
Other Minerals	N/A	

3. Pressure Control Equipment:

Please see the Natural Buttes Unit Standard Operating Procedure (SOP).

4. Proposed Casing & Cementing Program:

Please see the Natural Buttes Unit SOP.

5. Drilling Fluids Program:

Please see the Natural Buttes Unit SOP.

6. Evaluation Program:

Please see the Natural Buttes Unit SOP.

7. Abnormal Conditions:

Maximum anticipated bottomhole pressure approximately equals 2,760 psi (calculated at 0.4 psi/foot).

Maximum anticipated surface pressure equals approximately 1,242 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. Anticipated Starting Dates & Notification of Operations:

Please see the Natural Buttes Unit SOP.

9. Variations:

Please see the Natural Buttes Unit SOP.

10. Other Information:

Please see the Natural Buttes Unit SOP.

**CIGE # 226-3-10-21
817' FSL & 2620' FWL
SE/SW, SECTION 3, T10S-R21E
Uintah County, Utah
Lease Number: U-0149078
ONSHORE ORDER NO. 1**

MULTI-POINT SURFACE USE AND OPERATIONS PLAN

An onsite inspection was conducted for the CIGE #226 on 8/26/97 at approximately 10:10 a.m. Weather conditions were cloudy with intermittent rain and moderate temperatures at the time of the onsite. In attendance at the inspection were the following individuals:

Bonnie Carson	Coastal Oil & Gas Corporation
Bill Rawlins	Coastal Oil & Gas Corporation
Byron Tolman, Steve Strong, & Steve Madsen	BLM
Robert Kay	U.E.L.S.
Harley Jackson	Jackson Construction
Jim Justice	J-West
John Faucett	John E. Faucett Construction
Cory Stubbs	Stubbs and Stubbs

1. Existing Roads:

The proposed well site is approximately 18.7 miles southeast of Ouray, Utah.
Directions to the location from Vernal, Utah:

Proceed in a westerly direction from Vernal, Utah, along U.S. Highway 40 approximately 14.0 miles to the junction of State Highway 88; exit left and proceed in a southerly direction approximately 17.0 miles to Ouray, Utah; proceed in a southerly direction approximately 9.1 miles on the Seep Ridge Road to the junction of this road and an existing road to the southeast; turn left and proceed in a southeasterly direction approximately 2.4 miles to the junction of this road and an existing road to the east; turn left and proceed in an easterly direction approximately 4.1 miles to the junction of this road and an existing road to the northeast; turn left and proceed in a northeasterly direction approximately 1.5 miles to the junction of this road and an existing road to the northwest; proceed in a northeasterly direction approximately 1.1 miles to the junction of this road and an existing road to the north; turn left and proceed in a northerly direction approximately 0.1 miles to the junction of this road and an existing road to the west; turn left and proceed in a westerly direction approximately 0.4 miles to the beginning of the proposed access road to the southwest; follow the road flags in a southwesterly direction approximately 200 feet to the proposed location.

Refer to Topo Maps A and B for location of access roads within a 2 mile radius.

There will be no improvement to existing access roads.

2. Planned Access Roads

Please see the Natural Buttes Unit Standard Operating Procedure.

Please see Map B to determine the location of the proposed access road.

3. Location of Existing Wells Within a 1-Mile Radius: See Map C

4. Location of Existing and Proposed Facilities:

Please see the Natural Buttes Unit Standard Operating Procedure.

Please see Map D to determine the location of the proposed pipeline.

5. Location and Type of Water Supply

Please see the Natural Buttes Unit Standard Operating Procedure.

6. Source of Construction Materials

Please see the Natural Buttes Unit Standard Operating Procedure.

7. Methods of Handling Waste Materials

Please see the Natural Buttes Unit Standard Operating Procedure.

8. Ancillary Facilities

Please see the Natural Buttes Unit Standard Operating Procedure.

9. Well Site Layout: See Location Layout Diagram

A Location Layout Diagram is attached. It describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

The reserve pit will not be lined.

10. Plans for Reclamation of the Surface

Please see the Natural Buttes Unit Standard Operating Procedure.

The following seed mixture will be used to reclaim the surface. A total of 12# per acre will be used if the seeds are drilled (Twice as much seed will be used per acre if the seed is broadcast). Per acre requirements (drilled) are:

Nuttal's salt bush	3#
shadscale	3#
four wing salt bush	4#
galleta	2#

11. Surface Ownership

Well pad and access road: The well pad and access road are located on lands owned by:

United States of America
Bureau of Land Management
170 South 500 East
Vernal, Utah 84078
(801) 789-1362

12. Other Information

A Class III archaeological survey was conducted by Metcalf Archaeological Consultants on April 18, 1997. A copy of this report was submitted directly to the appropriate agencies by Metcalf Archaeological Consultants. Cultural resource clearance was recommended for this location.

Critical Soils: Because of the presence of critical soils, there will be no construction during those periods when the soil is wet or muddy.

13. Lessee's or Operators's Representative and Certification

Bonnie Carson
Senior Environmental Analyst
Coastal Oil & Gas Corporation
P.O. Box 749
Denver, CO 80201-0749
(303) 573-4476

Tom Young
Drilling Manager
Coastal Oil & Gas Corporation
9 Greenway Plaza, Suite 2770
Houston, TX 77046
(713) 877-7044

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved.





Bonnie Carson

Date 9/3/97

COASTAL OIL & GAS CORP.

LOCATION LAYOUT FOR


CIGE #226-3-10-21
SECTION 3, T10S, R21E, S.L.B.&M.
817' FSL 2620' FWL

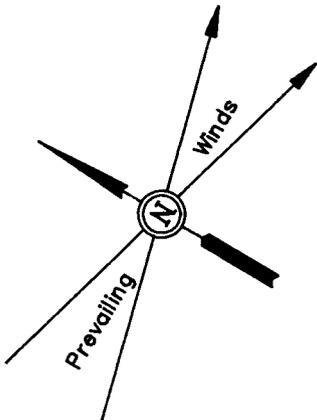

SCALE: 1" = 50'
DATE: 2-17-97
Drawn By: C.B.T.
Revised: 8-26-97 C.G.

NOTE:

Flare Pit is to be located a min. of 100' from the Well Head.

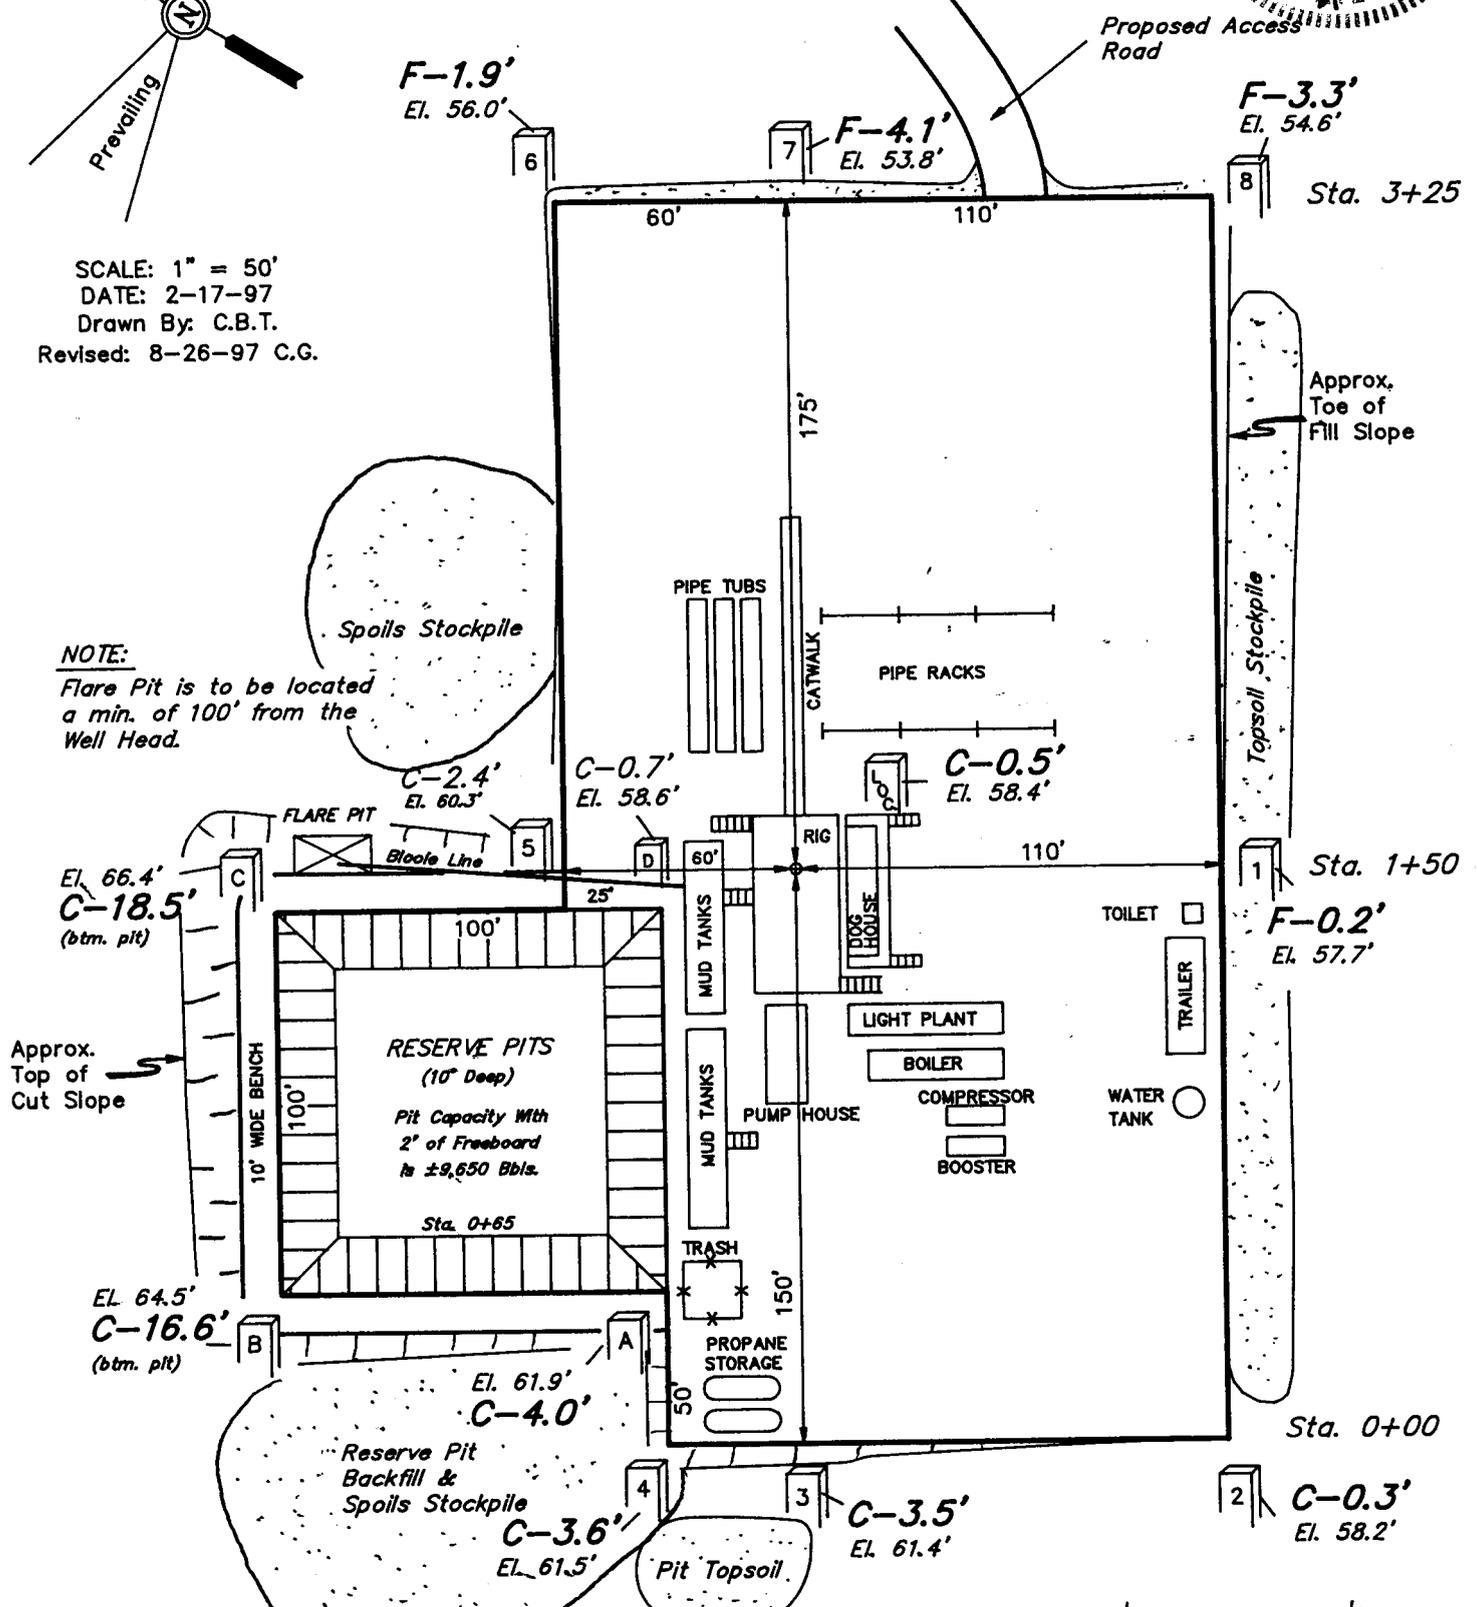

NOTES:


Elev. Ungraded Ground At Loc Stake = 5058.4'
FINISHED GRADE ELEV. AT LOC. STAKE = 5057.9'

FIGURE #1


COASTAL OIL & GAS CORP.

TYPICAL CROSS SECTIONS FOR


CIGE #226-3-10-21
SECTION 3, T10S, R21E, S.L.B.&M.
817' FSL 2620' FWL




DATE: 2-17-97
Drawn By: C.B.T.
Revised: 3-12-97 C.B.T.




STA. 3+25

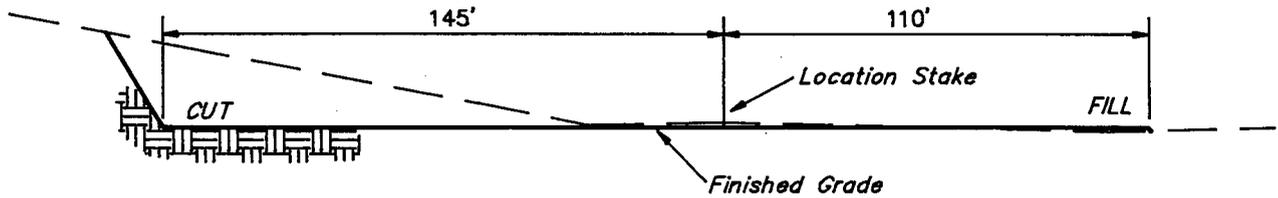

STA. 1+50

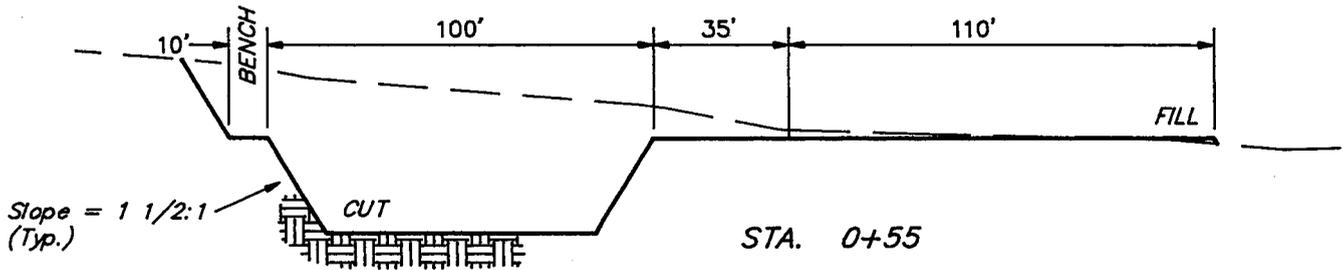

STA. 0+55

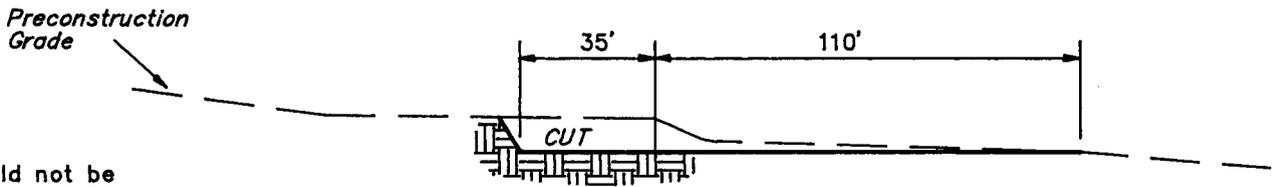

STA. 0+00


NOTE:
Topsoil should not be Stripped Below Finished Grade on Substructure Area.

APPROXIMATE YARDAGES

CUT		
(6") Topsoil Stripping	=	1,140 Cu. Yds.
Remaining Location	=	5,510 Cu. Yds.
TOTAL CUT	=	6,650 CU.YDS.
FILL	=	2,440 CU.YDS.

EXCESS MATERIAL AFTER 5% COMPACTION	=	4,080 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	=	2,480 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	=	1,600 Cu. Yds.

FIGURE #2

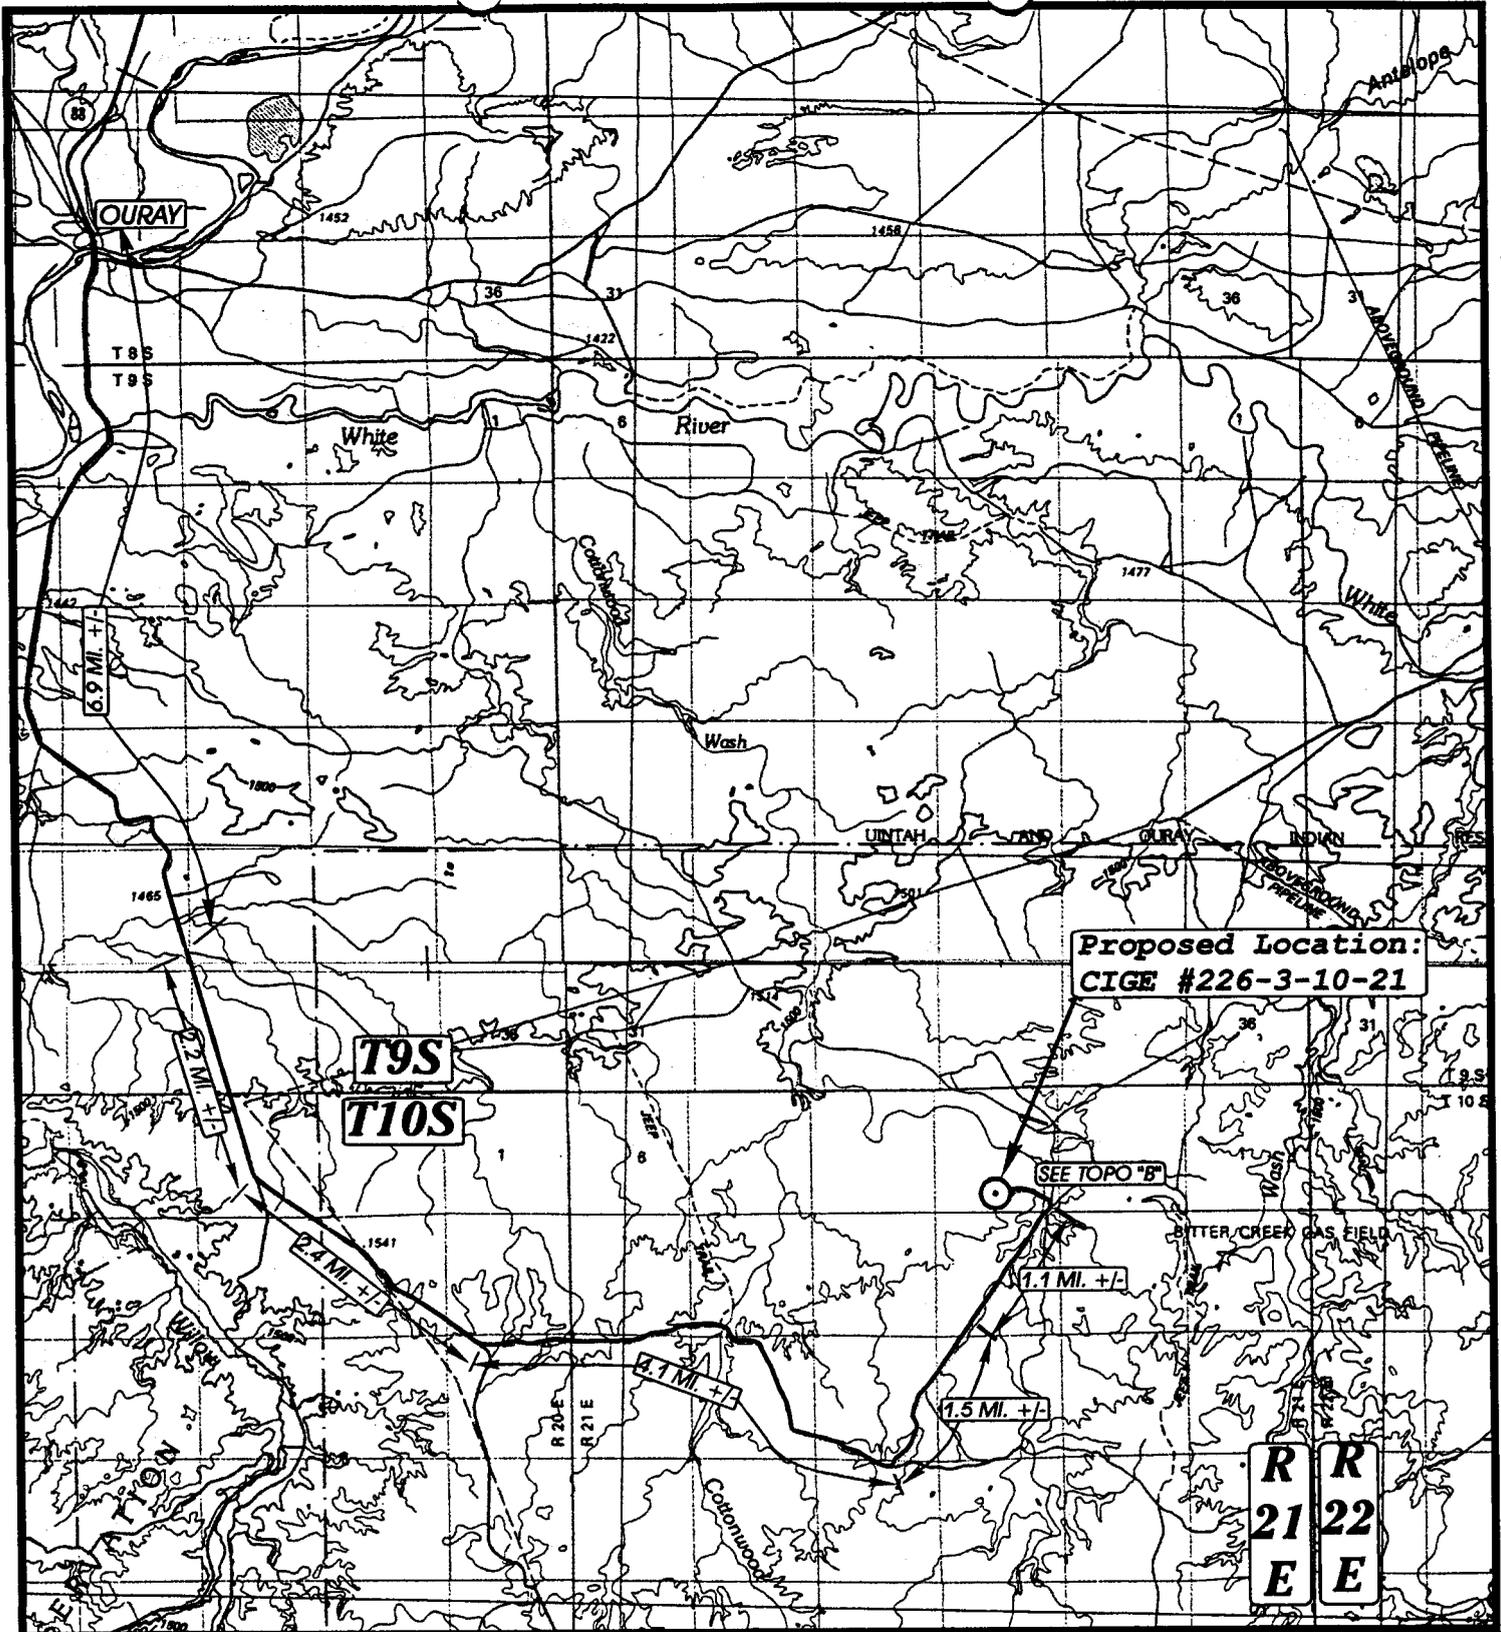

**Proposed Location:
CIGE #226-3-10-21**

**T9S
T10S**

**R R
21 22
E E**

UELS


**TOPOGRAPHIC
MAP "A"**

**DATE: 2-14-97
Drawn by: D.COX**



COASTAL OIL & GAS CORP.

**CIGE #226-3-10-21
SECTION 3, T10S, R21E, S.L.B.&M.
817' FSL 2620' FWL**

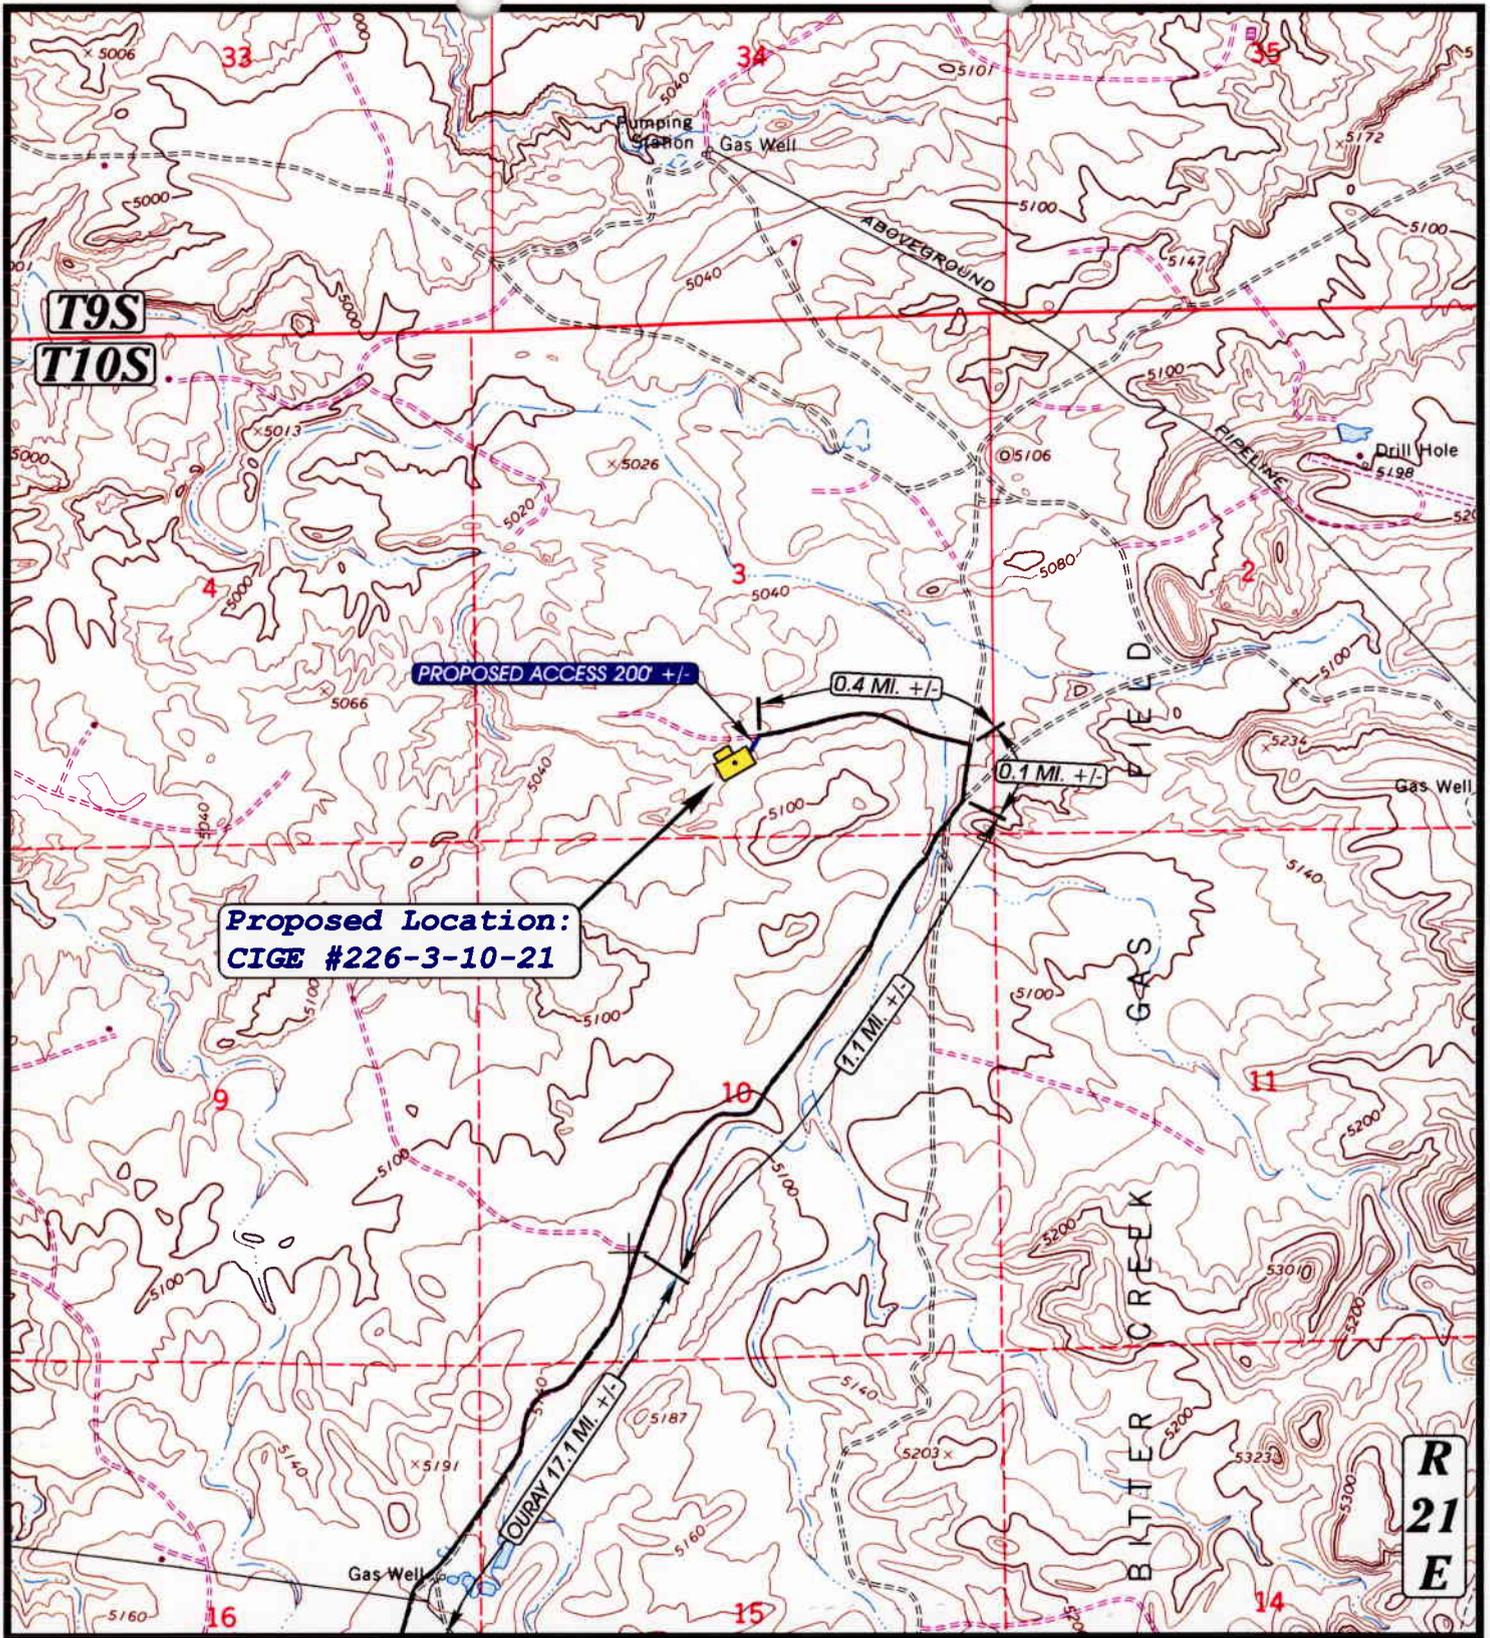

**Proposed Location:
CIGE #226-3-10-21**

UELS

**TOPOGRAPHIC
MAP "B"**

**DATE: 2-14-97
Drawn by: D.COX**

**UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (801) 789-1017**




SCALE: 1" = 2000'

COASTAL OIL & GAS CORP.

**CIGE #226-3-10-21
SECTION 3, T10S, R21E, S.L.B.&M.
817' FSL 2620' FWL**

**R
21
E**

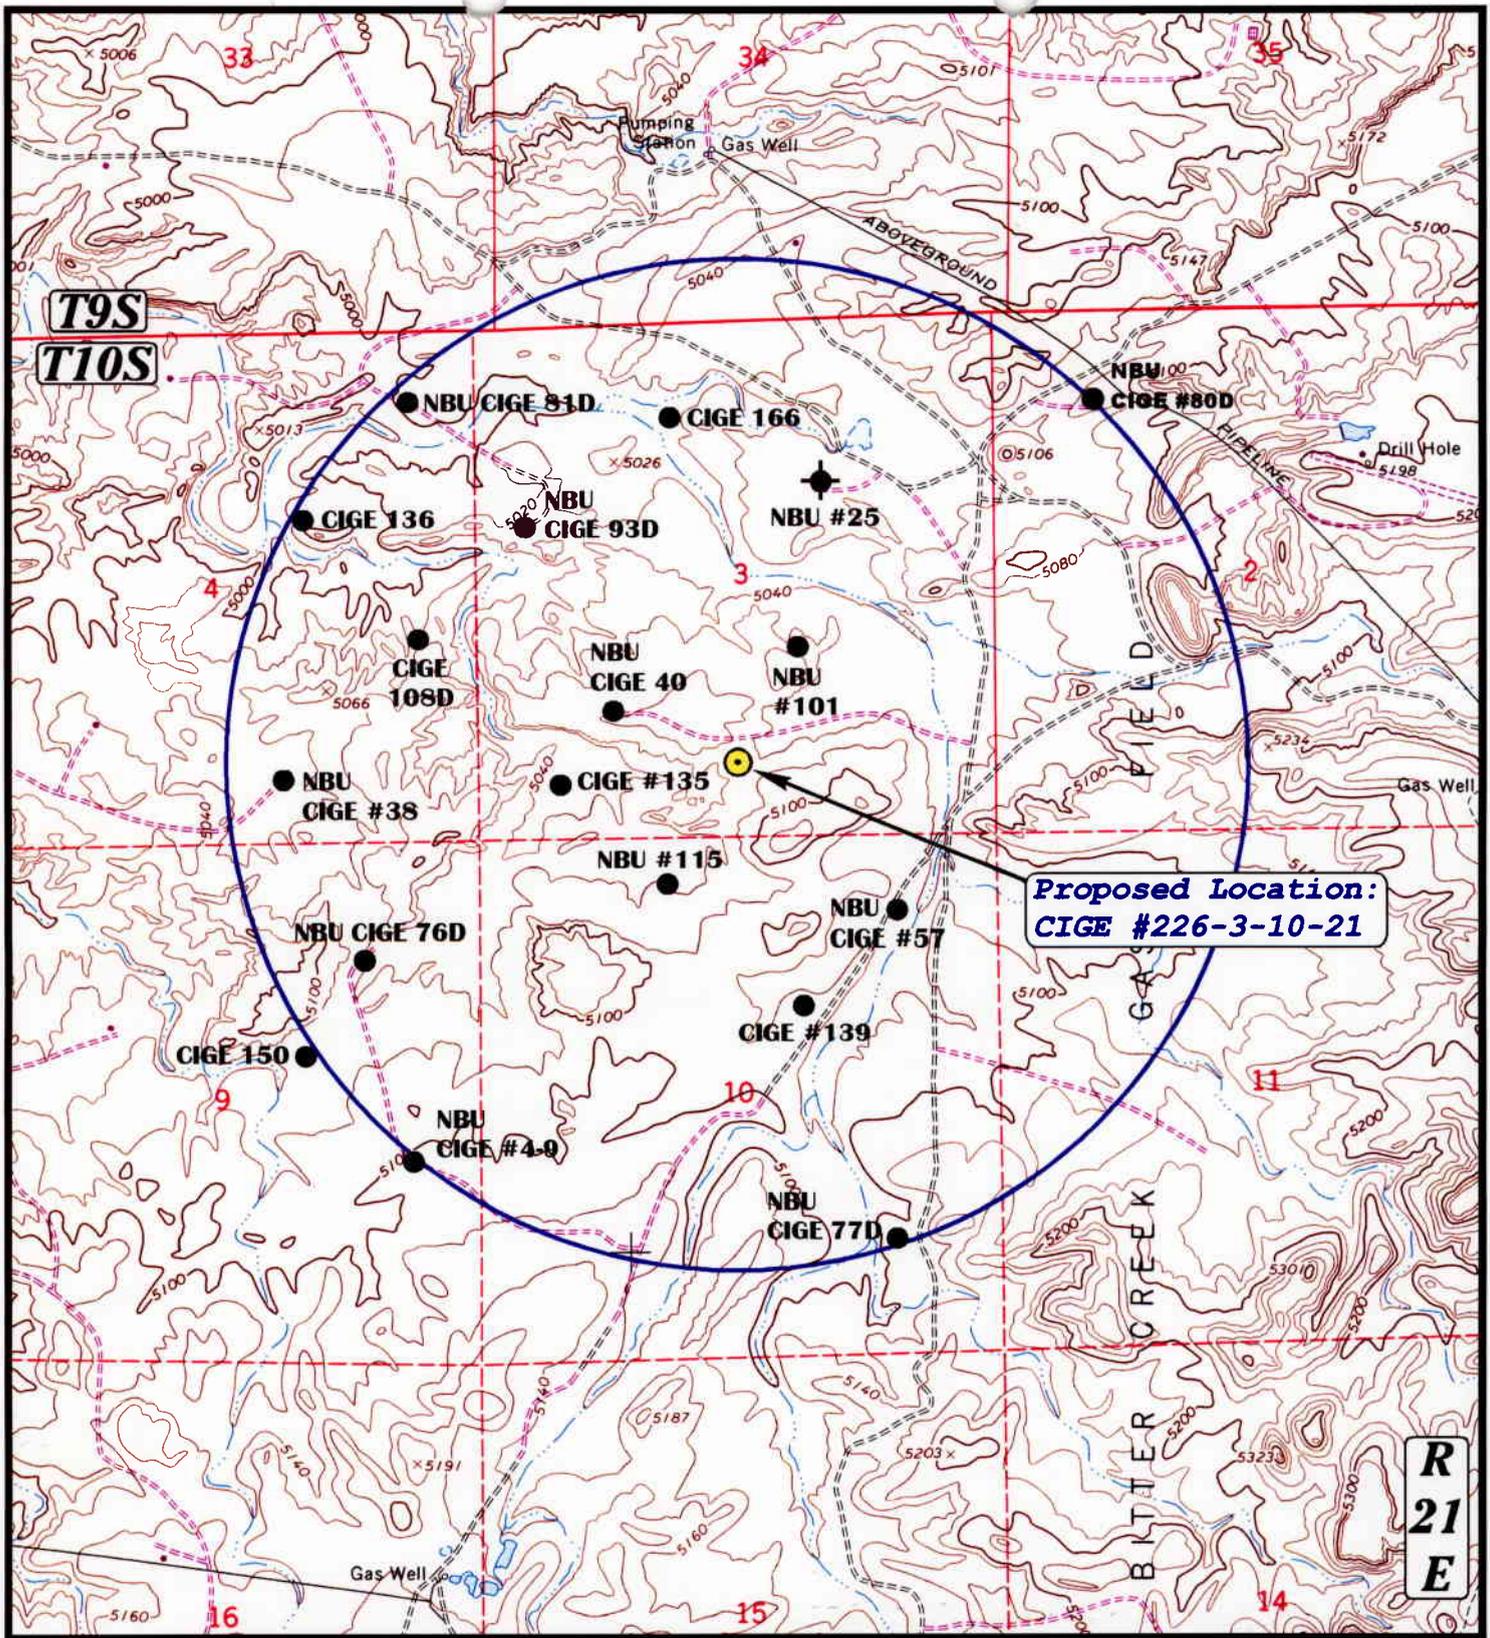

**Proposed Location:
CIGE #226-3-10-21**

**R
21
E**

LEGEND:

- UEIS**
- * Water Wells
 - Abandoned Wells
 - + Temporarily Abandoned Wells
 - + Disposal Wells
 - * Drilling Wells
 - + Producing Wells
 - + Shut-in Wells



COASTAL OIL & GAS CORP.

CIGE #226-3-10-21

SECTION 3, T10S, R21E, S.L.B.&M.


TOPOGRAPHIC MAP "C"

DATE: 2-14-97

Drawn by: D.COX

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (801) 789-1017

SCALE: 1" = 2000'

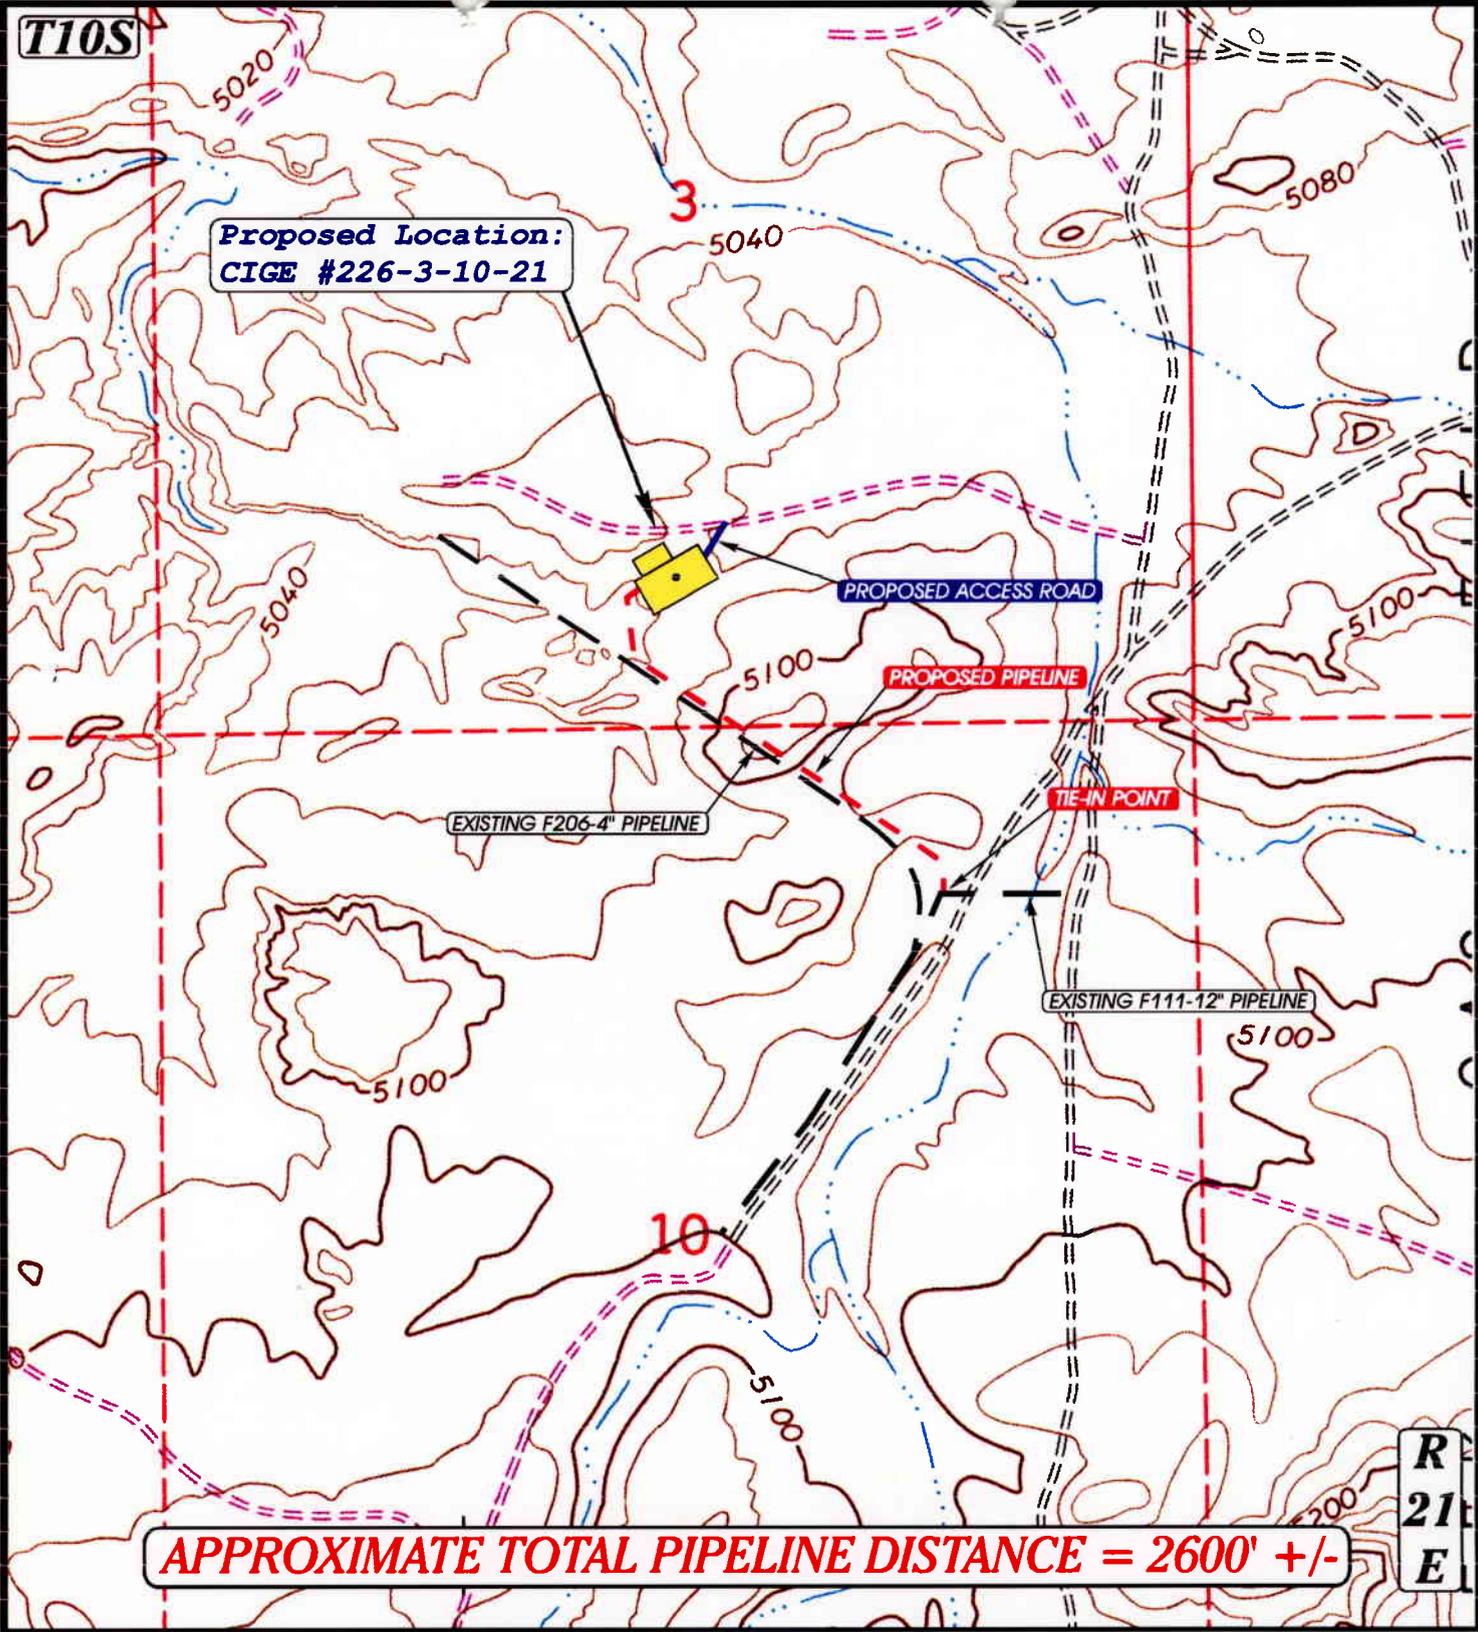

APPROXIMATE TOTAL PIPELINE DISTANCE = 2600' +/-

TOPOGRAPHIC MAP "D"

- - - - Existing Pipeline
 - - - - Proposed Pipeline



Scale: 1" = 1000'

COASTAL OIL & GAS CORP.

**CIGE #226-3-10-21
SECTION 3, T10S, R21E, S.L.B.&M.**

DATE: 4-15-97
Drawn by: D.COX

U E I S
 UTAH ENGINEERING & LAND SURVEYING
 85 So. 200 East • Vernal, Utah 84078 • (801) 789-1017

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 09/05/97

API NO. ASSIGNED: 43-047-32995

WELL NAME: CIGE 226-3-10-21
OPERATOR: COASTAL OIL & GAS (N0230)

PROPOSED LOCATION:
SESW 03 - T10S - R21E
SURFACE: 0817-FSL-2620-FWL
BOTTOM: 0817-FSL-2620-FWL
UINTAH COUNTY
NATURAL BUTTES FIELD (630)

LEASE TYPE: FED
LEASE NUMBER: U - 0149078

PROPOSED PRODUCING FORMATION: WSTC

INSPECT LOCATION BY: / /		
TECH REVIEW	Initials	Date
Engineering		
Geology		
Surface		

RECEIVED AND/OR REVIEWED:

Plat
 Bond: Federal State Fee
(Number 11605382-9)
 Potash (Y/N)
 Oil shale (Y/N)
 Water permit
(Number 43-8496)
 RDCC Review (Y/N)
(Date: _____)

LOCATION AND SITING:

R649-2-3. Unit: NATURAL BUTTES
 R649-3-2. General.
 R649-3-3. Exception.
 Drilling Unit.
Board Cause no: _____
Date: _____

COMMENTS: _____


STIPULATIONS: 1. Oil shale - 4 1/2" casing

OPERATOR: COASTAL OIL & GAS (N0230)

FIELD: NATURAL BUTTES (630)

SEC, TWP, RNG: 3,4,8,9,& 15, T10S, R21E

COUNTY: UINTAH UAC: R649-2-3 NATURAL BUTTES

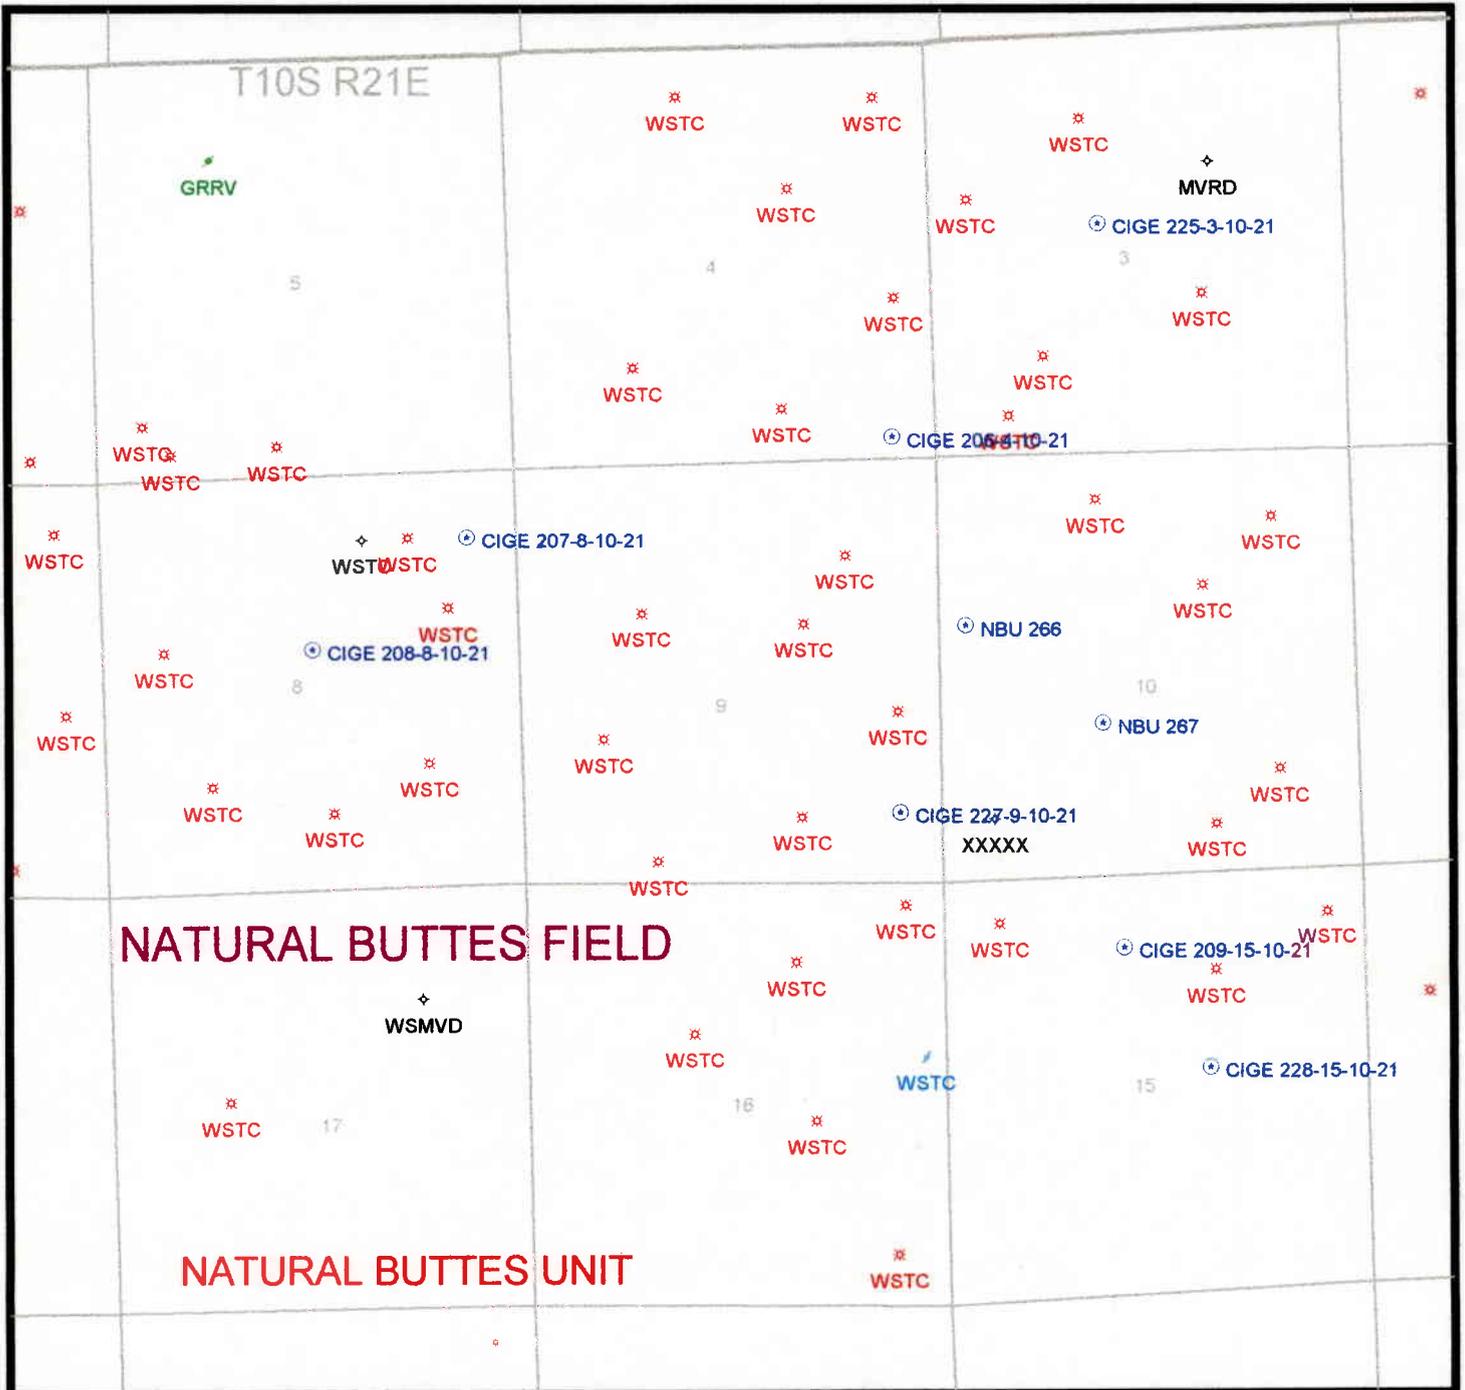

PREPARED:
DATE: 8-SEP-97



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt
Governor
Ted Stewart
Executive Director
James W. Carter
Division Director

1594 West North Temple, Suite 1210
Box 145801
Salt Lake City, Utah 84114-5801
801-538-5340
801-359-3940 (Fax)
801-538-7223 (TDD)

November 19, 1997

Coastal Oil & Gas Corp.
P.O. Box 749
Denver, Colorado 80201-0749

Re: CIGE 226-3-10-21 Well, 817' FSL, 2620' FWL, SE SW, Sec. 3,
T. 10 S., R. 21 E., Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. 40-6-1 et seq., Utah Administrative Code R649-3-1 et seq., and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-32995.

Sincerely,

A handwritten signature in cursive script that reads "John R. Baza".
John R. Baza
Associate Director

lwp

Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: Coastal Oil & Gas Corp.
Well Name & Number: CIGE 226-3-10-21
API Number: 43-047-32995
Lease: U-0149078
Location: SE SW Sec. 3 T. 10 S. R. 21 E.

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for Permit to Drill.

2. Notification Requirements

Notify the Division within 24 hours following spudding the well or commencing drilling operations. Contact Jim Thompson at (801)538-5336.

Notify the Division prior to commencing operations to plug and abandon the well. Contact John R. Baza (801)538-5334.

3. Reporting Requirements

All required reports, forms and submittals shall be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. In accordance with the Order in Cause No. 190-5(b) dated October 28, 1982, the operator shall comply with the requirements of Rule R649-3-31 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the 4½" casing is cemented over the entire oil shale section as defined by Rule R649-3-31.

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK DRILL <input checked="" type="checkbox"/> DEEPEN <input type="checkbox"/>		5. LEASE DESIGNATION AND SERIAL NO. U-0149078
b. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER <input type="checkbox"/> SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>		6. IF INDIAN, ALLOTTEE OR TRIBE NAME N/A
2. NAME OF OPERATOR Coastal Oil & Gas Corporation		7. UNIT AGREEMENT NAME Natural Buttes Unit
3. ADDRESS AND TELEPHONE NO. P.O. Box 749, Denver, CO 80201-0749 (303) 573-4476		8. FARM OR LEASE NAME, WELL NO. CIGE 226-3-10-21
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)* At surface 817' FSL & 2620' FWL (SESW) At proposed prod. zone		9. API WELL NO.
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE* Approximately 18.7 miles north of Ouray, Utah		10. FIELD AND POOL, OR WILDCAT Natural Buttes Field
15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any) N/A		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Section 3-T10S-R21E
16. NO. OF ACRES IN LEASE 648.44	17. NO. OF ACRES ASSIGNED TO THIS WELL N/A	12. COUNTY OR PARISH Uintah
18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT. See Topo Map C	19. PROPOSED DEPTH 6900'	13. STATE Utah
20. ROTARY OR CABLE TOOLS Rotary		22. APPROX. DATE WORK WILL START* Upon Approval
21. ELEVATIONS (Show whether DF, RT, GR, etc.) Ungraded GR = 5058.4'		

**RECEIVED
SEP 08 1997**

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
See NBU SOP				
Drilling Program				

Coastal Oil & Gas Corporation proposes to drill a well to the proposed TD as stated above. If productive, casing will be run and the well completed. If dry, the well will be plugged and abandoned as per BLM and State of Utah requirements.

See the attached Drilling Program and Multi-point Surface Use & Operations Plan.

Coastal Oil & Gas Corporation is considered to be the operator of the subject well. It agrees to be responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided for by: State of Utah Bond #102103 and BLM Nationwide Bond #U605382-9.

**RECEIVED
NOV 20 1997
DIV. OF OIL, GAS & MINING**

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout prevention program, if any.

24. SIGNED Bonnie Carson TITLE Sr. Environmental Analyst DATE 9/13/97

(This space for Federal or State office use)

CONDITIONS OF APPROVAL ATTACHED

PERMIT NO. _____ APPROVAL DATE _____

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY [Signature] TITLE Assistant Field Manager DATE NOV 17 1997

*See Instructions On Reverse Side

DOGM Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

114080-001-421

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Coastal Oil & Gas Corporation

Well Name & Number: CIGE 226-3-10-21

API Number: 43-047-32995

Lease Number: U-0149078

Location: SESW Sec. 03 T. 10S R. 21E

CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. DRILLING PROGRAM

1. Casing Program and Auxiliary Equipment

As a minimum, the usable water resources shall be isolated and/or protected by having a cement top for the production casing at least 200 ft. above the base of the usable water zone, identified at 4,223 ft.

SURFACE USE PROGRAM
Conditions of Approval (COAs)

-The location topsoil pile shall be seeded immediately after the soil is piled by broadcasting the seed, then walking the topsoil pile with the dozer to plant the seed. The seed mix is provided in the APD. All poundages are in Pure Live Seed.

-Once the reserve pit is dry, it shall be filled, recontoured, topsoil spread, and seeded in the same manner discussed above.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

U-0149078

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA/Agreement, Name and/or No.

Natural Buttes Unit

8. Well Name and No.

CIGE #226-3-10-21

9. API Well No.

43-047-32995

10. Field and Pool, or Exploratory Area

Natural Buttes Field

11. County or Parish, State

Uintah Utah

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

Coastal Oil & Gas Corporation

3a. Address

P.O. Box 749, Denver, CO 80201-0749

3b. Phone No. (include area code)

(303) 573-4455

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

**817' FSL & 2620' FWL (SESW)
Section 3, T10S-R21E**

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>Extend APD</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.)


The APD for the referenced well was approved on November 17, 1997. The operator requests that the APD be extended for an additional year so that drilling may be completed.

COPY SENT TO OPERATOR
Date: 9-29-98
Initials: [Signature]

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: 9/29/98

By: [Signature]



14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Sheila Bremer

Title

Environmental & Safety Analyst

Date

9/17/98

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

From: Margie Herrmann <mherrman@ut.blm.gov>
 To: <nrogm.dstaley@state.ut.us>
 Date: Thu, Mar 4, 1999 1:24 PM
 Subject: Permits to be rescinded? - Reply

*APD Approval
 Extensions
 per
 Margie Herrmann -
 BLM Vernal -*

Hi Don,

Below is a list of permitted Federal and Indian lease wells that are due to be rescinded per our records and permit dates. Could you let me know what the status of these wells is. Thanks! --
 In answer to your request.
 Margie

=====

Barrett Resources expires 5/14/99
 Ute Tribal 1-21
 21-5S-4W
 43-013-31836

Barrett Resources expires 5/14/99
 Ute Tribal 16-21
 21-5S-4W
 43-013-31839

Coastal expires 11/17/99
 CIGE 223-1-10-22
 1-10S-22E
 43-047-32983

Coastal expires 11/17/99
 CIGE 226-3-10-21
 3-10S-21E
 43-047-32995

Coastal expires 11/8/99
 CIGE 206-4-10-21
 4-10S-21E
 43-047-32996

Inland Production expired 1/28/99
 Monument Federal 21-22-9-16Y letter being done
 22-9S-16E
 43-013-31727

Inland Production expired 2/25/99
 West Point 10-31-8-16 letter being done
 31-8S-16E
 43-013-31772

Inland Production expired 2/18/99
 Monument Butte Federal 12-27 letter being done
 27-8S-16E
 43-013-31919

Inland Production expired 1/22/99

Well File



UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

U- 0149078

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA/Agreement, Name and/or No.

Natural Buttes Unit

8. Well Name and No.

Cige #226

9. API Well No.

43-047-32995

10. Field and Pool, or Exploratory Area

Natural Buttes Field

11. County or Parish, State

Uintah UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

Coastal Oil & Gas Corporation

3a. Address

P.O. Box 1148, Vernal UT 84078

3b. Phone No. (include area code)

(435) 781-7023

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SE/SW Sec.3, T10S, R21E
817' FSL & 2620' FWL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>Amend TD</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.)

Coastal Oil & Gas Corporation proposes to change the TD to 8107', in order to drill to the Mesaverde formation.

(From 6900/wsk)

Please refer to attached Drilling Program.

COPY SENT TO OPERATOR
Date: 10-8-99
Initials: CHP

RECEIVED
SEP 22 1999
DIV. OF OIL, GAS & MINING

Federal Approval of this Action is Necessary

Approved by the Utah Division of Oil, Gas and Mining
Date: 10/6/99
By: [Signature]

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Katy Dow

Title

Environmental Secretary

Date 9/17/99

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**Coastal Oil & Gas Corporation
Cige #226
SE/SW Sec.3, T10S, R21E
Uintah County, UT**

GEOLOGIC SURFACE FORMATION:

SE/SW Sec. 3, T10S, R21E – 817' FSL & 2620' FWL

ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:

<u>Formation</u>	<u>Estimated Top</u>
KB	5058'
Green River	1397'
Wasatch	4607'
Mesaverde	7507'

PROPOSED CASING PROGRAM

See Attached

DRILLING FLUIDS PROGRAM

See Attached

TESTING, LOGGING AND CORING:

See Attached


CEMENTING PROGRAM:

See Attached

COASTAL OIL & GAS CORPORATION

DRILLING PROGRAM

COMPANY NAME Coastal Oil & Gas Corporation DATE 9/15/99
 WELL NAME Generic Natural Buttes Well TD _____
 FIELD Ouray COUNTY Uintah STATE Utah ELEVATION _____
 SURFACE LOCATION _____ BHL Straight Hole
 OBJECTIVE ZONE(S) Lower Green River, Wasatch, Mesaverde
 ADDITIONAL INFO _____

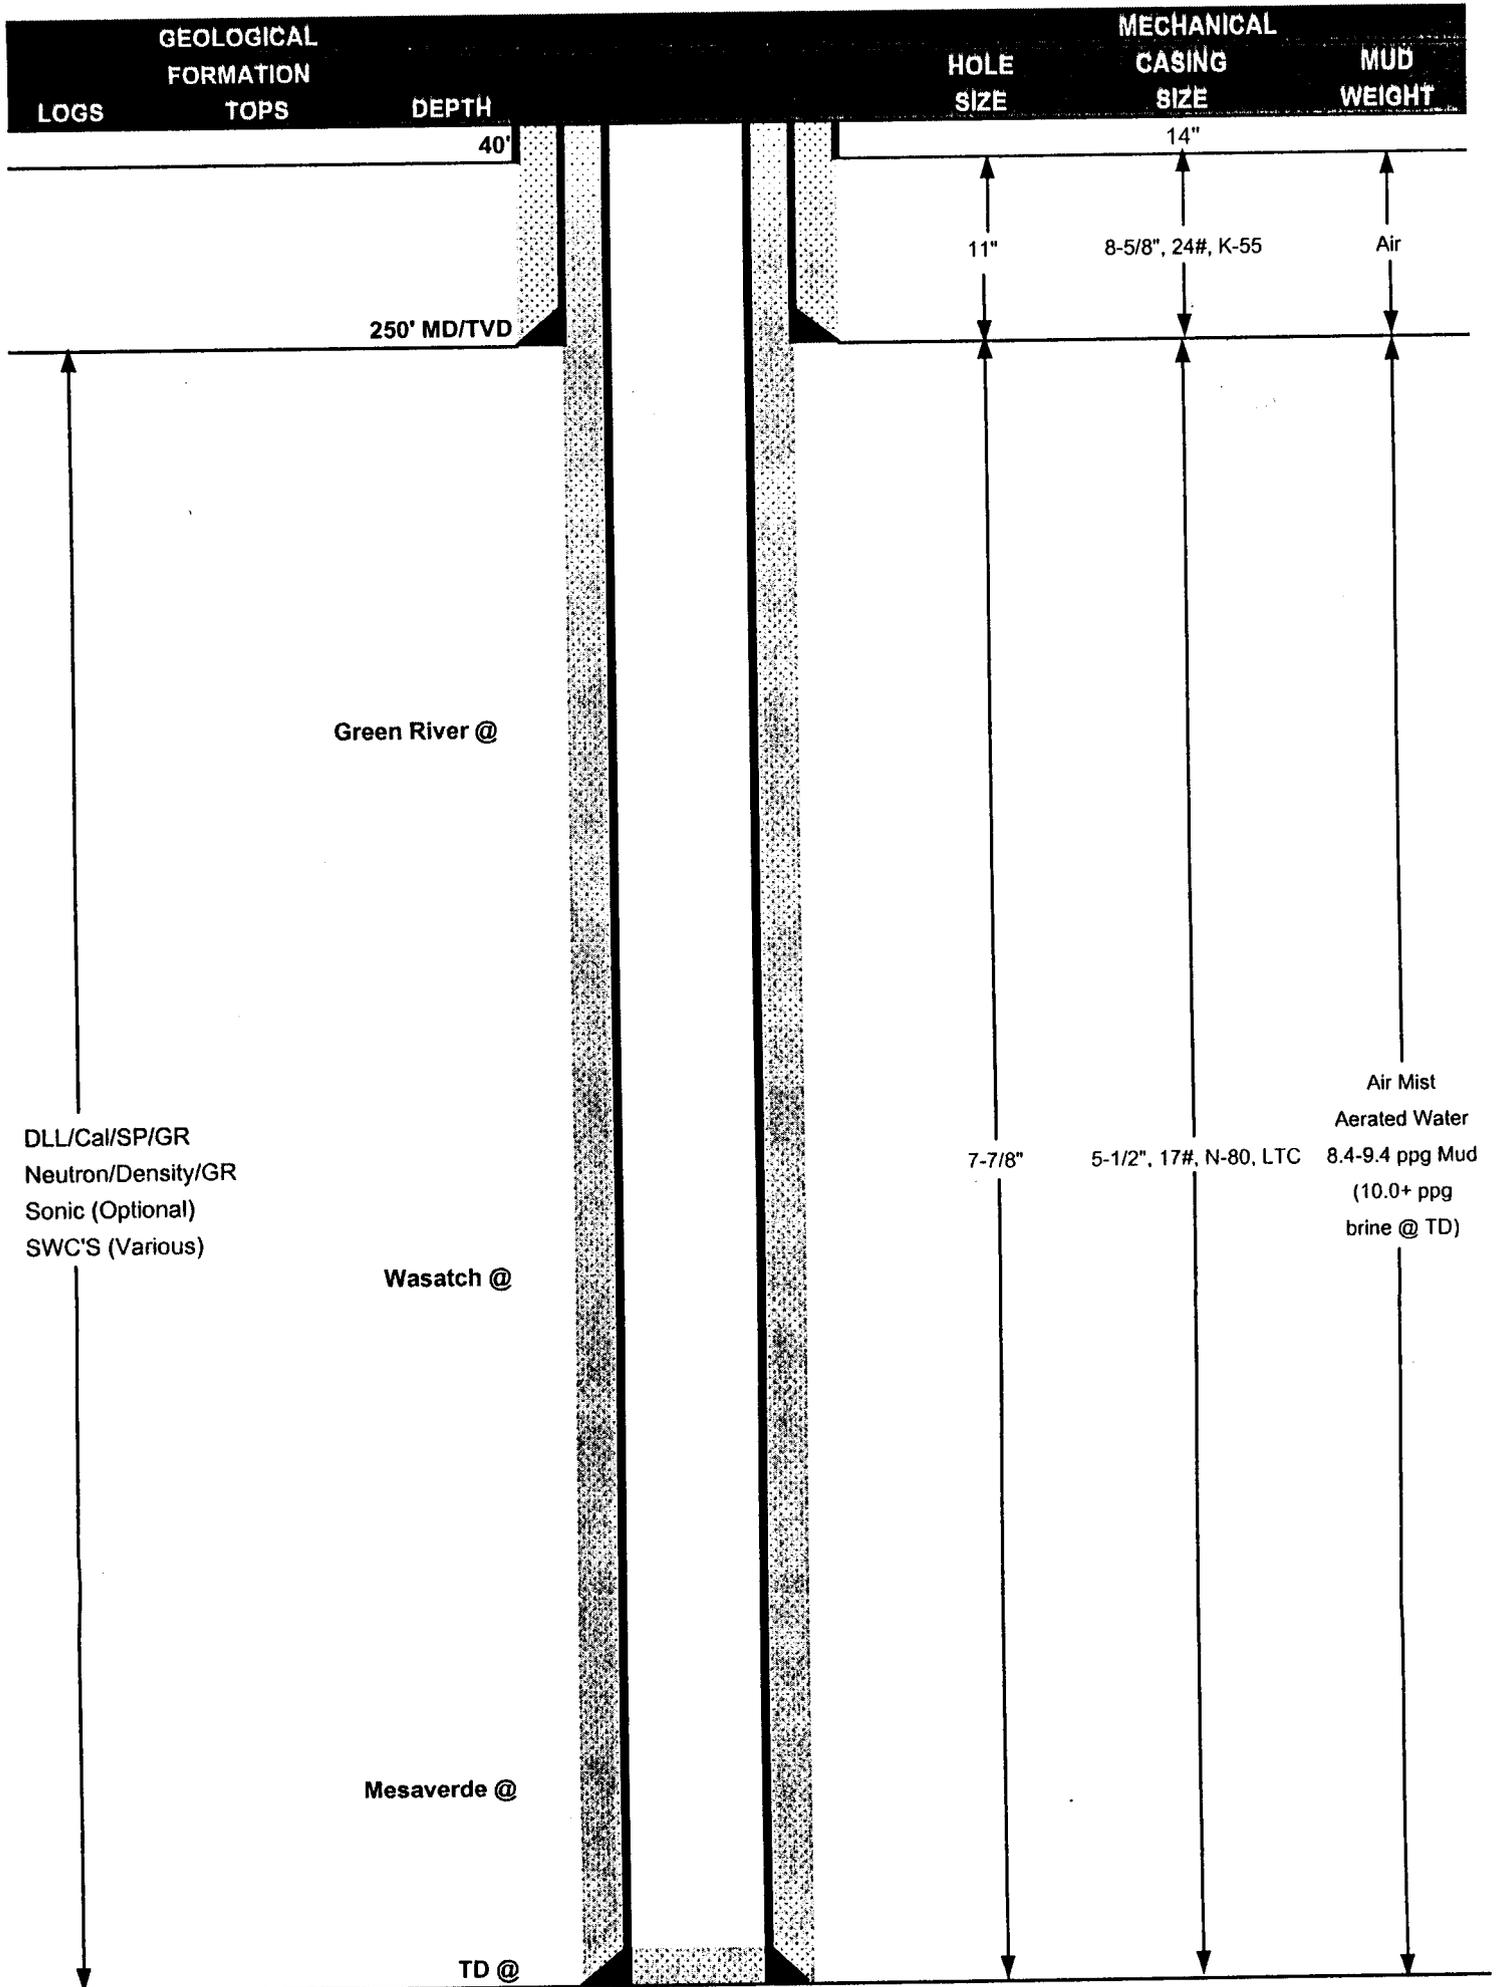

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'						
SURFACE	8-5/8"	0-250'	24#	K-55	STC	>10	>10	>10
PRODUCTION	5-1/2"	0-TD	17#	N-80	LTC	SPECIFIED BY PROD DEPT		
TUBING								

CEMENT PROGRAM


	FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	250' MD/TVD	Neat + 2% CaCl ₂	95	25%	15.60	1.19
PRODUCTION	LEAD 500' Above Prod Int-Surf	Hifill + 0.6% EX-1 + 0.25 lb/sk Flocele + 0.2% FWCA + 10 lb/sk Gilsonite + 16% Gel + 1% HR-7 + 3% Salt		*TBD	11.60	3.12
	TAIL TD-500' Above Productive Int.	50/50 POZ + 0.25 lb/sk Flocele + 0.4% Halad-322 + 2% Gel + 0.1% HR-5 + 2% Microbond M +5% Salt		*TBD	14.4	1.24

* 15% over caliper log

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, float collar. Centralize 5' above shoe & every other collar to surface.
PRODUCTION	Specified by Production Department (every other joint across pay zones).

WELL HEAD EQUIPMENT

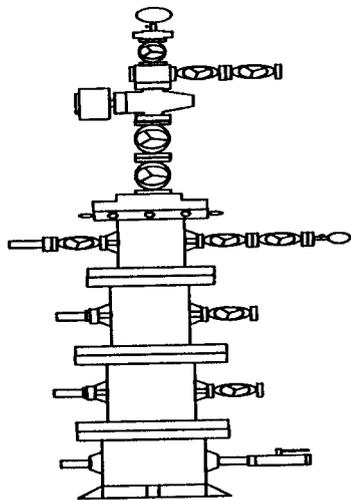

TREE	2-1/16" 5M
TUBING HEAD	11" 3M X 7-1/16" 5M
CASING SPOOL	
CASING SPOOL	
CASING HEAD	8-5/8" SOW X 11" 3M

BIT PROGRAM

INTERVAL	HC	BIT MFG & MODEL	GPM	SERIAL	WZLS	COMMENTS
Surface Hole	11"	Various				
SC - Top of Wasatch	7-7/8"	Various				
Wasatch	7-7/8"	Various (PDC)				
Mesaverde	7-7/8"	Various				

GEOLOGICAL DATA

LOGGING:

Depth	Log Type
SC - TD	DLL/Cal/SP/GR
SC - TD	Neutron/Density/GR
Optional	Sonic
Various	SWC's

MUD LOGGER:

As per Geology

SAMPLES:

As per Geology

CORING:

As per Geology

DST:

As per Geology

MUD PROGRAM

DEPTH	TYPE	MUD WT	WATER LOSS	VISCOSITY	TREATMENT
0-Trona	Air Mist	NA	NA		
Trona-TD	Aerated Water Water/Mud	NA 8.4-9.4	NC 15cc	NA 30-40	KCL, Gel, LCM, Polymer
At TD	Brine	10-12 ppg	NC	NC	

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 3M with one annular and 2 rams. Test to 3,000 psi (annular to 1,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.

Run Totco survey every 500' from surface casing shoe to TD. Maximum allowable hole angle is 5 degrees.

PROJECT ENGINEER:

Blaine Yeary

DATE: _____

PROJECT MANAGER:

Tom Young

DATE: _____

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

U- 0149078

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA/Agreement, Name and/or No.
Natural Buttes Unit

8. Well Name and No.

Cige #226

9. API Well No.

43-047-32995

10. Field and Pool, or Exploratory Area
Natural Buttes Field

11. County or Parish, State

Uintah UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

Coastal Oil & Gas Corporation

3a. Address

P.O. Box 1148, Vernal UT 84078

3b. Phone No. (include area code)

(435) 781-7023

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SE/SW Sec.3, T10S, R21E
817' FSL & 2620' FWL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

Notice of Intent
 Subsequent Report
 Final Abandonment Notice

TYPE OF ACTION

Acidize Deepen Production (Start/Resume) Water Shut-Off
 Alter Casing Fracture Treat Reclamation Well Integrity
 Casing Repair New Construction Recomplete Other Revised TD
 Change Plans Plug and Abandon Temporarily Abandon
 Convert to Injection Plug Back Water Disposal

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.)

Coastal Oil & Gas Corporation requests authorization to revise the previous Sundry Notice, requesting TD change from 8107' to 8307'. Cmt. Csg. Drilling fluids program will remain unchanged.

COPY SENT TO OPERATOR
Date: 10-12-99
Initials: CHD

OCT 4 1999
DIV. OF OIL, GAS & MINING

Approved by the
Utah Division of
Oil, Gas and Mining
Date: 10/7/99
By: [Signature]

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Katy Dow

Title

Environmental Secretary

Date 9/30/99

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.


Office

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

COASTAL OIL & GAS CORPORATION

DRILLING PROGRAM

COMPANY NAME Coastal Oil & Gas Corporation DATE 9/15/99
 WELL NAME Generic Natural Buttes Well TD _____
 FIELD Ouray COUNTY Uintah STATE Utah ELEVATION _____
 SURFACE LOCATION _____ BHL Straight Hole
 OBJECTIVE ZONE(S) Lower Green River, Wasatch, Mesaverde
 ADDITIONAL INFO _____

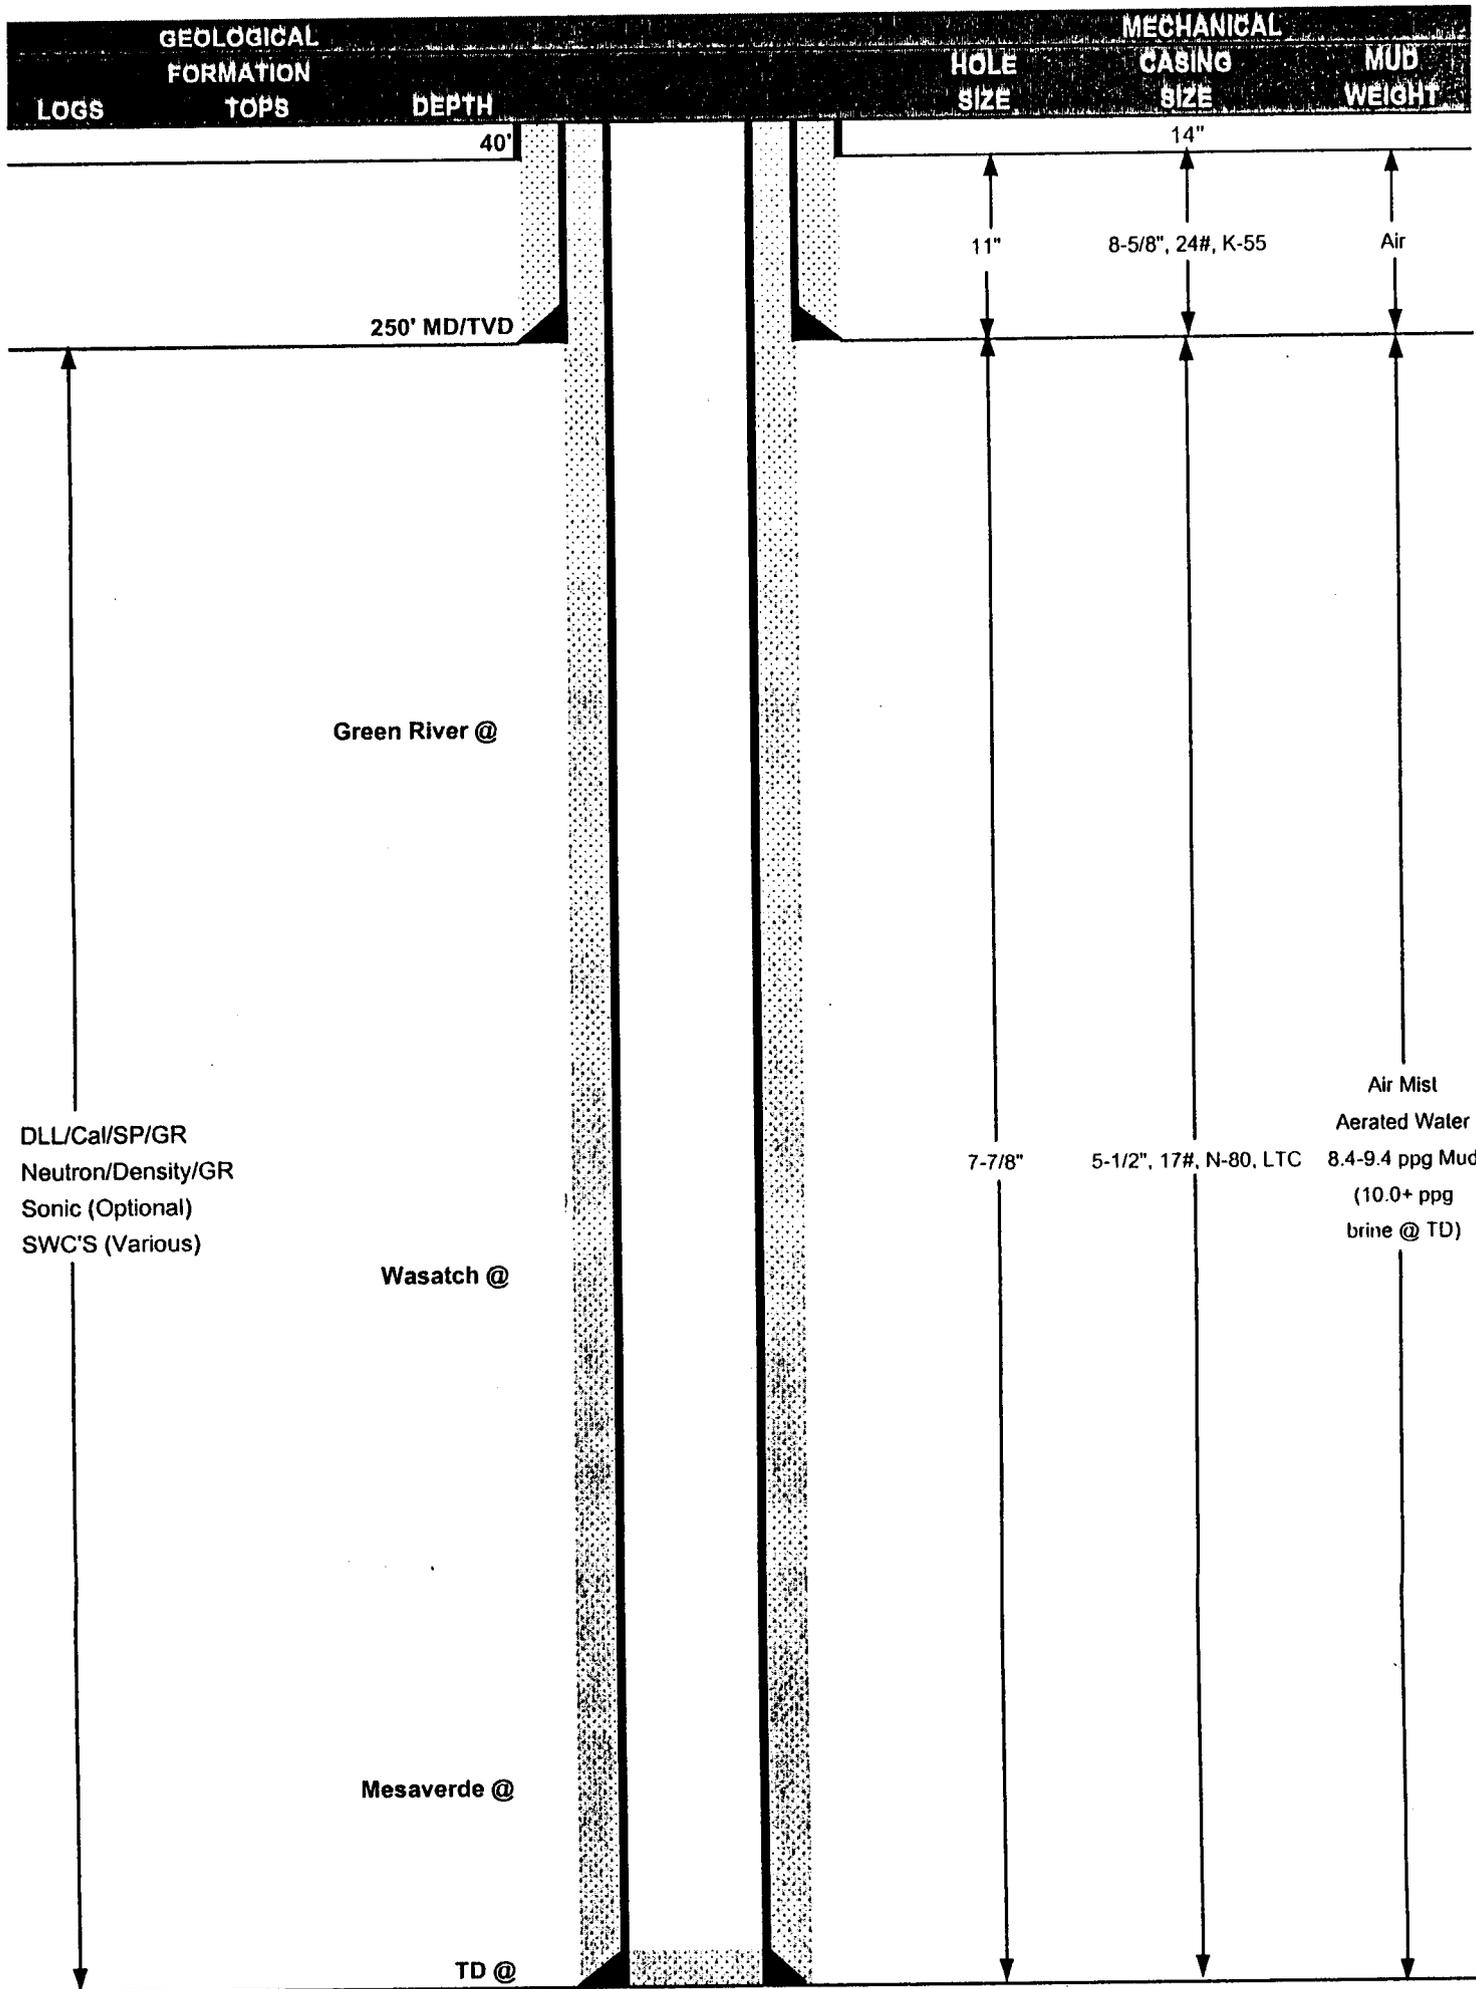

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'						
SURFACE	8-5/8"	0-250'	24#	K-55	STC	>10	>10	>10
PRODUCTION	5-1/2"	0-TD	17#	N-80	LTC	SPECIFIED BY PROD DEPT		
TUBING								

CEMENT PROGRAM


	FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	250' MD/TVD	Neat + 2% CaCl ₂	95	25%	15.60	1.19
PRODUCTION	LEAD 500' Above Prod Int-Surf	Hifill + 0.6% EX-1 + 0.25 lb/sk Flocele + 0.2% FWCA + 10 lb/sk Gilsonite + 16% Gel + 1% HR-7 + 3% Salt		*TBD	11.60	3.12
	TAIL TD-500' Above Productive Int.	50/50 POZ + 0.25 lb/sk Flocele + 0.4% Halad-322 + 2% Gel + 0.1% HR-5 + 2% Microbond M +5% Salt		*TBD	14.4	1.24

* 15% over caliper log

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, float collar. Centralize 5' above shoe & every other collar to surface.
PRODUCTION	Specified by Production Department (every other joint across pay zones).

WELLHEAD EQUIPMENT

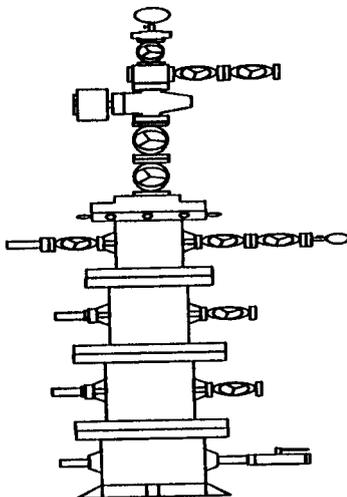

TREE	2-1/16" 5M
TUBING HEAD	11" 3M X 7-1/16" 5M
CASING SPOOL	
CASING SPOOL	
CASING HEAD	8-5/8" SOW X 11" 3M

BIT PROGRAM

INTERVAL	SIZE	BIT MFG & MODEL	GPM	SER	NZLS	COMMENTS
Surface Hole	11"	Various				
SC - Top of Wasatch	7-7/8"	Various				
Wasatch	7-7/8"	Various (PDC)				
Mesaverde	7-7/8"	Various				

GEOLOGICAL DATA

LOGGING:

Depth	Log Type
SC - TD	DLL/Cal/SP/GR
SC - TD	Neutron/Density/GR
Optional	Sonic
Various	SWC's

MUD LOGGER:

As per Geology

SAMPLES:

As per Geology

CORING:

As per Geology

DST:

As per Geology

MUD PROGRAM

DEPTH	TYPE	MUD WT	WATER LOSS	VISCOSITY	TREATMENT
0-Trona	Air Mist	NA	NA		
Trona-TD	Aerated Water Water/Mud	NA 8.4-9.4	NC 15cc	NA 30-40	KCL, Gel, LCM, Polymer
At TD	Brine	10-12 ppg	NC	NC	

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 3M with one annular and 2 rams. Test to 3,000 psi (annular to 1,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.

Run Totco survey every 500' from surface casing shoe to TD. Maximum allowable hole angle is 5 degrees.

PROJECT ENGINEER:

Blaine Yeary

DATE:

PROJECT MANAGER:

Tom Young

DATE:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

U-049078

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA/Agreement, Name and/or No
Natural Buttes Unit

8. Well Name and No.
CIGE #226

9. API Well No.
43-047-32995

10. Field and Pool, or Exploratory Area
Natural Buttes Field

11. County or Parish, State
Uintah County Utah

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
Coastal Oil & Gas Corporation

3a. Address
P.O. Box 1148, Vernal UT 84078

3b. Phone No. (include area code)
(435)-781-7023

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SESW Sec.3, T10S, R21E 817' FSL & 2620' FWL


12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>Spud</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.)

10/29/99 MIRU w/Bill Martin Drlg (Air Rig). Drilled 270' of 12 1/4" hole. Ran 6 jts 8 5/8" 24# K-55 csg Shoe Total 258.20.cmt.
Pumped 20 Bbls Gel Water ahead of 160 sx P-AG w/2% CaCl2 + 1/4#/sx Flocele wt 15.6 yield 1.18.
Dropped plug & Displaced w/14 Bbls water +/- 5 Bbls.
Cmt to surface. Hole stayed full.

Spud 10/29/99 @ 11:30 am w/ Bill Martin Drlg (Air Rig).



14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Sheila Upchego

Title

Environmental Secretary

Date 11/10/99

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office


Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

ENTITY ACTION FORM - FORM 6

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION				SPUD DATE	EFFECTIVE DATE	
					QQ	SC	TP	RG			COUNTY
B	999999	2900	43-047-32995	Cige #226	SESW	3	10S	21E	Uintah County	10/29/99	10/29/99
WELL 1 COMMENTS: Spud on 10/29/99 @ 11:30 am w/ Bill Martin Drlg (Air Rig). <i>991130 entity added (not Buttes w/ WSMVD) KDR</i>											
B	999999	2900	43-047-33011	NBU #278	SWSW	30	9S	22E	Uintah County	10/29/99	10/29/99
WELL 2 COMMENTS: Spud on 10/29/99 @ 2:00 pm w/ Malcoms Drlg (Bucket Rig). <i>991130 entity added; (not Buttes w/ WSMVD) KDR</i>											
B	999999	2900	43-047-32983	Cige #223	NWNW	1	10S	22E	Uintah County	10/2/99	10/2/99
WELL 3 COMMENTS: Spud on 10/2/99 @ 4:30 pm w/ Bill Martin Drlg (Air Rig). <i>991130 entity added; (not Buttes w/ WSMVD) KDR</i>											
B	999999	2900	43-047-33007	NBU #307	NWNE	28	9S	21E	Uintah County	10/20/99	10/20/99
WELL 4 COMMENTS: Spud on 10/20/99 @ 8:30 am w/ Bill Martin Drlg (Air Rig). <i>991130 entity added; (not Buttes w/ WSMVD) KDR</i>											
WELL 5 COMMENTS:											

ACTION CODES (See instructions on back of form)

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)



Sheila Upchego
Signature Sheila Upchego

Environmental Secretary 11/10/99

Title Date

Phone No. (435) 781-7024

NOTE: Use COMMENT section to explain why each Action Code was selected.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. U-0149078
2. Name of Operator Coastal Oil & Gas Corporation		6. If Indian, Allottee or Tribe Name N/A
3a. Address P.O. Box 1148, Vernal UT 84078	3b. Phone No. (include area code) (435)-781-7023	7. If Unit or CA/Agreement, Name and/or No. Natural Buttes Unit
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) SESW Sec.3, T10S, R21E 817'FSL & 2620'FWL		8. Well Name and No. Cige #226
		9. API Well No. 43-047-032995-32995
		10. Field and Pool, or Exploratory Area Natural Buttes Field
		11. County or Parish, State Uintah County Utah

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>Final</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<u>Drilling Summary</u>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.)


Finished Drilling from 270' -8110'. Ran 185 jts 5 1/2" 17# N-80 csg. Cmt w/ 380 sx Class G w/ adds. 11.5 ppg, 3.23 Yield. Tail w/ 106 sx 50/50 POZ w/ Adds, 14.3 ppg, 1.3 Yield. Drop Plug. Displace w/2% KCL. Bump Plug. Float Held.

Released Rig on 1/9/00 @ 12:00 am.

RECEIVED

JAN 24 2000

**DIVISION OF
OIL, GAS AND MINING**

14. I hereby certify that the foregoing is true and correct Name (Printed/Typed) Sheila Upchego	Title Environmental Jr. Analyst
	Date 1/14/00

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. U- 0149078
2. Name of Operator Coastal Oil & Gas Corporation		6. If Indian, Allottee or Tribe Name N/A
3a. Address P.O. Box 1148, Vernal UT 84078	3b. Phone No. (include area code) (435)781-7023	7. If Unit or CA/Agreement, Name and/or No. Natural Buttes Unit
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) SE/SW Sec.3, T10S, R21E 817'FSL & 2620'FWL		8. Well Name and No. Cige #226
		9. API Well No. 43-047-32995
		10. Field and Pool, or Exploratory Area Natural Buttes Field
		11. County or Parish, State Uintah UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other <u>Completion Report</u>


13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.)

Subject well placed on production on 1/20/00. Please refer to the attached Chronological History.

RECEIVED

FEB 07 2000

DIVISION OF
OIL, GAS AND MINING

14. I hereby certify that the foregoing is true and correct Name (Printed/Typed) Katy Dow	Title Environmental Jr. Analyst
	Date 2/1/00

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**COASTAL OIL & GAS
PRODUCTION REPORT**

CHRONOLOGICAL HISTORY

CIGE #226

NATURAL BUTTES FIELD
UINTAH COUNTY, UTAH
WI: 100% AFE# 18982
PBTD: 8054'
CSG: 5 1/2", 17# @ 8110'
PERFS: 7808' - 5304'
CWC(M\$):

10/29/99 BUILD ROAD AND LOCATION

- 01/13/00** POOH, LOG & PERF. MIRU RIG & EQUIP, PU & RIH W/ 4 3/4" DB, 1 JT, SN & 2 3/8" TBG TAGGED @ 8061 PBTD, CIRC WELL W/ 200 BBLs 2% KCL WTR, POOH W/ 2 3/8" TBG EOT @ 7802' SWI. SDFN.
(DAY 1) TC: \$7,551
- 01/14/00** PICKLE TBG SPOT ACID & BRK DOWN. POOH W/ 2 3/8" TBG, SN, 1 JT & DB, RU CUTTERS WLS, RIH W/ CBL/CCL/GR, LOG F/ 8054' TO 1400' W/ 1000# ON CSG, CMT TOP @ 1670', POOH, TST CSG TO 5000# OK, 8 5/8" X 5 1/2" ANNULUS 3 BPM @ 200# F/ 20 BBLs INJ RATE, RIH W/ 4" CSG GUNS, 90 DEG PHASING AS FOLLOWS, 7808' - 08', 1 SPF, (8 HOLES), 7640' - 48', 4 SPF, (32 HOLES), 7562' - 72', 3 SPF, (30 HOLES), 7518' - 24', 2 SPF, (12 HOLES), 7468' - 72', 1 SPF, (4 HOLES), 7456' - 60', 1 SPF, RUNS, 0 PSI, POOH & RD WLS, RIH W/ NC. 1 JT, SN & 2 3/8" TBG EOT @ 7802'. SDFN.
(DAY 2) TC: \$22,787
- 01/15/00** W.O. FRAC MI & RU HES MONDAY MORNING. SICP-0 PSI, RU HES & PICKLE TBG W/ 3 BBL 15% HCL. SPOT 1000 GAL 15% HCL ACROSS PERF (7456'-7808'). POOH W 2 3/8" TBG. EOT @ 6601'. RU HES & BRK DN PERF F/ 7456'-7808' W/ 2254 PSI @ 2 BPM. INJ RATE 3493 PSI @ 5 BPM W/ 10 BBL. PUMP 15 BBL KCL, 24 BBL 15% HCL, & 10 BBL KCL W/ 125 1.3 SG BALL SEALERS. FLUSH W/ 73 BBL KCL. ISIP- 2276 PSI, 5 MIN 1977 PSI. SURAGE BALL INJ RATE 3737 PSI @ 5.2 BPM W/ 8 BBL KCL. ISP-1755 PSI, MP-4120 PSI, MR-5.8 BPM, AP-3768 PSI, AR-5.4 BPM. TOTAL LOAD=138 BBL. RD HES. POOH W/ 2 3/8" TBG. RD FLOOR & TBG EQUIP. ND BOPS. DRAIN UP PUMP & LINES. SWIFD & W.O. FRAC MONDAY @ 7AM.
(DAY 3) TC: \$507,496
- 01/17/00** ND FRAC VALVE, NU BOP. 07:00 AM SICP- 700#, RU CUTTERS WLS & HES, FRAC MV & WAS PERFS W/ 20/40 SAND WEDGE, 20# DELTA ON 1 ST STAGE, 25# DELTA FLUID/ GEL ON ALL OTHER STAGES W/ 500 GALS 28% HCL F/ NXT PERF'S, DWN CSG, **STAGE #1:** FRAC PERF'S F/ 7456'-7808', MP- 3778#, AP- 2466#, MR- 45.6 BPM, AR- 38.1 BPM, ISIP- 2540#, FG .77, TTL LOAD- 978 BBLs, SAND, 100,000#, RIH & SET CBP @ 7350', PERF W/ 4" CSG GUNS 4 SPF 90 DEG PHASING F/ 7110'- 18' (32 HOLES) 0 PSI. **STAGE #2:** PERF'S LISTED ABOVE, NO BRK, REPERF F/ 7108'- 18' 4SPF (40 HOLES) W/ 3000# ON WELL, 4700# BRK @ 2 BPM, MP- 3432#, AP- 3049#, MR- 29.5 BPM, AR- 28.4 BOM, ISIP- 2900#, FG .84, TTL LOAD- 702 BBLs, 65,100# SAND, RIH & SET CBP @ 7020', PERF W/ 4" CSG GUNS 4 SPF, 90 DEG PHASING F/ 6832'- 40' (32 HOLES) 0 PSI, **STAGE #3:** PERF'S LISTED ABOVE, 3995# BRK @ 7 BPM, MP- 3172#, AP- 3075#, MR-29.1 BPM, AR- 26 BPM, ISIP- 2625#, FG .82, TTL LOAD- 503 BBLs, 40,400# SAND, RIH & SET CBP @ 6750', PERF W/ 4" CSG GUNS 4 SPF, 90 DEG PHASING F/ 6602'- 12' (40 HOLES), 6510'-18' (32 HOLES), 6452'-58' (24 HOLES), 0 PSI. **STAGE #4:** PERF'S LISTED ABOVE 1721# @ 5.2 BPM, MP-2776#, AP- 2308#, MR- 41.7 BPM, AR- 37.1BPM, ISIP- 2268#, FG .78, TTL LOAD-

CIGE #226

1169 BBLS, 138,300# SAND, RIH & SET CBP @ 6360', PERF W/ 4" CSG GUNS 4SPF 90 DEG PHASING F/ 55'16"-26' (40 HOLES), 0 PSI. **STAGE #5:** PERF'S LISTED ABOVE, 1870# BRK @ 7.5 BPM, MP- 2391# AP- 2241#, MR-29.8 BPM, AR- 27 BPM, ISIP 1944#, FG .78, TTL LOAD 424BBLS, 34,300# SAND, RIH & SET CBP @ 5421', PERF W/ 4" CSG GUNS 4 SPF 90 DEG PHASING F/ 5304'-14' (40 HOLES), 0 PSI. **STAGE #6:** PERFS LISTED ABOVE, 3896# BRK @ 7 BPM, MP- 2191#, AP- 1831# MR- 28.1 BPM, AR- 23.4 BPM, ISIP- 1821#, FG .78, TTL LOAD 389 BBLS, 32,000# SAND RIH & SET CBP @ 5160', RD WLS & HES, SWI. **9:30pm:** SDFN.

(DAY 4) TC: \$552,691

01/19/00 RIH & C/O SAND & CBP'S. ND FRAC VALVE, NU BOP, RIH W/ 4 3/4" TOOTH BIT, PMP OFF SUB, 1 JT, SN & 2 3/8" TBG TAG SAND @ 5055', RU PWR SWVL & AIR FOAM UNIT, C/O SAND & CBP'S @ 5160', 5421', 6360', 6750', TO 6780' CIRC CLEAN. POOH W/ EOT @ 5280' START FLOWING UP TBG, TURN OVER TO FLOW BCK CREW, SICP - 800#, FTP - 240#, 48/64" CK. SDFN.

(DAY 5) TC: \$584,252

01/20/00 RU WLS & CUT OFF BIT. RIH W/ 2 3/8" TBG, TAG SAND @ 6990', RU PWR SWVL & AIR FOAM UNIT C/O SAND & CBP'S @ 7020' & 7350', TO 8061' PBTB, CIRC CLEAN, POOH W/ 2 3/8" TBG. LAND TBG W/ EOT @ 7552', SN @ 7517', ND BOP NU WH, PRESS UP TBG TO 2000# W/ AIR FOAM, COULDN'T PUMP OFF BIT, FILL TBG W/ 22 BBLS 2% KCL PRESS UP TO 5000#. COULDN'T PUMP OFF BIT, COULDN'T GET WLS UNTIL MORN @ 6:00AM. SWI. SDFN.

(DAY 6) TC: \$765,888

01/21/00 TURN OVER TO PROD. SICP-1680#, SITP-920#, BLOW DN, PMP 30 BBLS 2% KCL DWN CSG, RU BAKER WLS RIH TO 7670' BIT WAS GONE. POOH & RD WLS, START WELL TO FLOWING. TURN OVER TO FLOW BCK CREW. SDFD.

(DAY 7) TC: \$771,503

01/25/00 PROG: FLWD 1,372 MCF, 318 BW, FTP: 430#, CP: 860#, 20/64" CK, 24 HRS, LP: 273#, (OPEN CK TO 25/64"), LLTR: 671 BBLS.

01/26/00 PROG: FLWD 1,323 MCF, 220 BW, FTP: 430#, CP: 800#, 25/64" CK, 24 HRS, LP: 273, LLTR: 451 BBLS. IP DATE: 01/24/00. FLWG 1,372 MC, 318 BW, FTP: 430#. CP: 860#, 20/64" CK, LP: 273#. **FINAL REPORT.**

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN DUPLICATE
(See other instructions on reverse side)

FORM APPROVED
OMB NO. 1004-0137
Expires: February 28, 1995

WELL COMPLETION OR RECOMPLETION REPORT AND LOG*

5. LEASE DESIGNATION AND SERIAL NO.
U-0149078

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
N/A

7. UNIT AGREEMENT NAME
Natural Buttes Field

8. FARM OR LEASE NAME, WELL NO.
CIGE #226

9. API WELL NO.
43-047-32995

10. FIELD AND POOL, OR WILDCAT
Natural Buttes Field

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 3, T10S, R21E

1a. TYPE OF WELL: OIL WELL GAS WELL DRY Other _____

b. TYPE OF COMPLETION: NEW WELL WORK OVER DEEP-EN PLUG BACK DIFF. RESVR. Other _____

2. NAME OF OPERATOR
Coastal Oil & Gas Corporation

3. ADDRESS AND TELEPHONE NO.
P.O. Box 1148, Vernal UT 84078 (435)-781-7023

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)*
At surface
SESW
At top prod. interval reported below
817' FSL & 2620' FWL
At total depth

12. COUNTY OR PARISH
Uintah County

13. STATE
Utah

14. PERMIT NO.
43-047-32995

DATE ISSUED
11/19/97

15. DATE SPUDDED
10/29/99

16. DATE T.D. REACHED
1/10/00

17. DATE COMPL. (Ready to prod.)
1/21/00

18. ELEVATIONS (DF, RKB, RT, GR, ETC.)*
5058.4' Ungraded GL

19. ELEV. CASINGHEAD

20. TOTAL DEPTH, MD & TVD
8110'

21. PLUG, BACK T.D., MD & TVD
8054'

22. IF MULTIPLE COMPL., HOW MANY*

23. INTERVALS DRILLED BY
→

ROTARY TOOLS
X

CABLE TOOLS

24. PRODUCING INTERVAL(S), OF THIS COMPLETION - TOP, BOTTOM, NAME (MD AND TVD)*
Wasatch/Mesaverde 7808' - 5304'

25. WAS DIRECTIONAL SURVEY MADE
No

26. TYPE ELECTRIC AND OTHER LOGS RUN
CBL/CCL/GR

27. WAS WELL CORED
No

28. CASING RECORD (Report all strings set in well)

CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
8 5/8"	24#	270'	12 1/4"	160 sx PAG w/2% CaCl2	
5 1/2"	17#	8110'	7 7/8"	380 sx Class G w/Add	
			Tailed by	1065 sx 50/50 POZ G w/Add	

29. LINER RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
					2 3/8"	8061'	

30. TUBING RECORD

31. PERFORATION RECORD (Interval, size and number)

Was/MV 7808-08, (8HLS), 7640-48(32HLS) 7562-72(30HLS) 7518-24(12HLS), 7468-72(4HLS, Reperf 7108-18(40HLS) 6832-40(32HLS), 6602-12(40HLS), 6510-18(32HLS), 6452-58(24HLS), 5516-26(40HLS), 5304-14(40HLS)

32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
Refer to Item #37	

33.* PRODUCTION

DATE FIRST PRODUCTION
1/21/00

PRODUCTION METHOD **Flowing, gas lift, pumping - size and type of pump**
Flowing

WELL STATUS (Producing or shut-in): **Producing**

DATE OF TEST	HOURS TESTED	CHOKE SIZE	PROD'N. FOR TEST PERIOD	OIL - BBL.	GAS - MCF.	WATER - BBL.	GAS - OIL RATIO
1/24/00	24	20/64		0	1372	318	0
FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE	OIL - BBL.	GAS - MCF.	WATER - BBL.	OIL GRAVITY - API (CORR.)	
430#	860#		0	1372	318	0	

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)
Sold Used for Fuel

TEST WITNESSED BY

35. LIST OF ATTACHMENTS
Chronological Well History

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED Sheila Upchego TITLE Environmental Jr. Analyst DATE 2/28/00

*(See Instructions and Spaces for Additional Data on Reverse Side)

COASTAL OIL & GAS
PRODUCTION REPORT

CHRONOLOGICAL HISTORY

CIGE #226

SE SW, SECTION 3, T10S-R21E
LEASE #U-0149078
API #: 43-047-32995
FIELD: NATURAL BUTTES FIELD
UINTAH COUNTY, UTAH
SURFACE CSG: 8 5/8 24# 12 1/4"@270'
PRODUCTION CSG: 5 1/2", 17# 7 7/8"@ 8110'
TD:8110' PBSD:8054'
PERFS: WASATCH/MESAVERDE 7808' - 5304'
SPUD: 10/29/99

RECEIVED
10/29/99
DIVISION OF
OIL, GAS AND MINING

10/29/99-BUILD ROAD AND LOCATION
DRLG 10/29/00-01/10/00

- 01/13/00 POOH, LOG & PERF. MIRU RIG & EQUIP, PU & RIH W/ 4 3/4" DB, 1 JT, SN & 2 3/8" TBG TAGGED @ 8061 PBSD, CIRC WELL W/ 200 BBL 2% KCL WTR, POOH W/ 2 3/8" TBG EOT @ 7802' SWI. SDFN.**
- 01/14/00 PICKLE TBG SPOT ACID & BRK DOWN. POOH W/ 2 3/8" TBG, SN, 1 JT & DB, RU CUTTERS WLS, RIH W/ CBL/CCL/GR, LOG F/ 8054' TO 1400' W/ 1000# ON CSG, CMT TOP @ 1670', POOH, TST CSG TO 5000# OK, 8 5/8" X 5 1/2" ANNULUS 3 BPM @ 200# F/ 20 BBL INJ RATE, RIH W/ 4" CSG GUNS, 90 DEG PHASING AS FOLLOWS, 7808' - 08', 1 SPF, (8 HOLES), 7640' - 48', 4 SPF, (32 HOLES), 7562' - 72', 3 SPF, (30 HOLES), 7518' - 24', 2 SPF, (12 HOLES), 7468' - 72', 1 SPF, (4 HOLES), 7456' - 60', 1 SPF, RUNS, 0 PSI, POOH & RD WLS, RIH W/ NC. 1 JT, SN & 2 3/8" TBG EOT @ 7802'. SDFN.**
- 01/15/00 W.O. FRAC MI & RU HES MONDAY MORNING. SICP-0 PSI, RU HES & PICKLE TBG W/ 3 BBL 15% HCL. SPOT 1000 GAL 15% HCL ACROSS PERF (7456'-7808'). POOH W 2 3/8" TBG. EOT @ 6601'. RU HES & BRK DN PERF F/ 7456'-7808' W/ 2254 PSI @ 2 BPM. INJ RATE 3493 PSI @ 5 BPM W/ 10 BBL. PUMP 15 BBL KCL, 24 BBL 15% HCL, & 10 BBL KCL W/ 125 1.3 SG BALL SEALERS. FLUSH W/ 73 BBL KCL. ISIP-2276 PSI, 5 MIN 1977 PSI. SURAGE BALL INJ RATE 3737 PSI @ 5.2 BPM W/ 8 BBL KCL. ISP-1755 PSI, MP-4120 PSI, MR-5.8 BPM, AP-3768 PSI, AR-5.4 BPM. TOTAL LOAD=138 BBL. RD HES. POOH W/ 2 3/8" TBG. RD FLOOR & TBG EQUIP. ND BOPS. DRAIN UP PUMP & LINES. SWIFD & W.O. FRAC MONDAY @ 7AM.**
- 01/17/00 ND FRAC VALVE, NU BOP.07:00 AM SICP- 700#, RU CUTTERS WLS & HES, FRAC MV & WAS PERFS W/ 20/40 SAND WEDGE, 20# DELTA ON 1 ST STAGE, 25# DELTA FLUID/ GEL ON ALL OTHER STAGES W/ 500 GALS 28% HCL F/ NXT PERF'S, DWN CSG, STAGE #1: FRAC PERF'S F/ 7456'-7808', MP- 3778#, AP- 2466#, MR- 45.6 BPM, AR- 38.1 BPM, ISIP- 2540#, FG .77, TTL LOAD- 978 BBL, SAND, 100,000#, RIH & SET CBP @ 7350', PERF W/ 4" CSG GUNS 4 SPF 90 DEG PHASING F/ 7110'- 18' (32 HOLES) 0 PSI. STAGE #2: PERF'S LISTED ABOVE, NO BRK, REPERF F/ 7108'- 18' 4SPF (40 HOLES) W/ 3000# ON WELL, 4700# BRK @ 2 BPM, MP- 3432#, AP- 3049#, MR- 29.5 BPM, AR- 28.4 BOM, ISIP- 2900#, FG .84, TTL LOAD- 702 BBL, 65,100# SAND, RIH & SET CBP @ 7020', PERF W/ 4" CSG GUNS 4 SPF, 90 DEG PHASING F/ 6832'- 40' (32 HOLES) 0 PSI, STAGE #3: PERF'S LISTED ABOVE, 3995# BRK @ 7 BPM, MP- 3172#, AP- 3075#, MR-29.1 BPM, AR- 26 BPM, ISIP- 2625#, FG .82, TTL LOAD- 503 BBL, 40,400# SAND, RIH & SET CBP @ 6750', PERF W/ 4" CSG GUNS 4 SPF, 90 DEG PHASING F/ 6602'- 12' (40 HOLES), 6510'-18' (32 HOLES), 6452'-58' (24 HOLES), 0 PSI. STAGE #4: PERF'S LISTED ABOVE 1721# @5.2 BPM, MP-2776#, AP- 2308#, MR- 41.7 BPM, AR- 37.1BPM, ISIP- 2268#, FG .78, TTL LOAD- 1169 BBL, 138,300# SAND, RIH & SET CBP @ 6360', PERF W/ 4" CSG GUNS 4SPF 90 DEG PHASING F/ 5516'-26' (40 HOLES), 0 PSI. STAGE #5: PERF'S LISTED ABOVE, 1870# BRK @ 7.5 BPM, MP- 2391# AP- 2241#, MR-29.8 BPM, AR- 27 BPM, ISIP 1944#, FG .78, TTL LOAD 424BBL, 34,300# SAND, RIH & SET CBP @ 5421', PERF W/ 4" CSG GUNS 4 SPF 90 DEG PHASING F/ 5304'-14' (40 HOLES), 0 PSI. STAGE #6: PERFS LISTED ABOVE, 3896# BRK @ 7 BPM, MP- 2191#, AP- 1831# MR- 28.1BPM, AR- 23.4 BPM, ISIP- 1821#, FG .78, TTL LOAD 389 BBL, 32,000# SAND RIH & SET CBP @ 5160', RD WLS & HES, SWI. 9:30pm: SDFN.**
- 01/19/00 RIH & C/O SAND & CBP'S. ND FRAC VALVE, NU BOP, RIH W/ 4 3/4" TOOTH BIT, PMP OFF SUB, 1 JT, SN & 2 3/8" TBG TAG SAND @ 5055', RU PWR SWVL & AIR FOAM UNIT, C/O SAND & CBP'S @ 5160', 5421', 6360', 6750', TO 6780' CIRC CLEAN. POOH W/ EOT @ 5280' START FLOWING UP TBG, TURN OVER TO FLOW BCK CREW, SICP - 800#, FTP - 240#, 48/64" CK. SDFN.**

CIGE #226

- 01/20/00** **RU WLS & CUT OFF BIT.** RIH W/ 2 3/8" TBG, TAG SAND @ 6990', RU PWR SWVL & AIR FOAM UNIT C/O SAND & CBP'S @ 7020' & 7350', TO 8061' PBTD, CIRC CLEAN, POOH W/ 2 3/8" TBG. LAND TBG W/ EOT @ 7552', SN @ 7517', ND BOP NU WH, PRESS UP TBG TO 2000# W/ AIR FOAM, COULDN'T PUMP OFF BIT, FILL TBG W/ 22 BBLs 2% KCL PRESS UP TO 5000#. COULDN'T PUMP OFF BIT, COULDN'T GET WLS UNTIL MORN @ 6:00AM. SWI. SDFN.
- 01/21/00** **TURN OVER TO PROD.** SICP-1680#, SITP-920#, BLOW DN, PMP 30 BBLs 2% KCL DWN CSG, RU BAKER WLS RIH TO 7670' BIT WAS GONE. POOH & RD WLS, START WELL TO FLOWING. TURN OVER TO FLOW BCK CREW. SDFD.
- 01/25/00** **PROG:** FLWD 1,372 MCF, 318 BW, FTP: 430#, CP: 860#, 20/64" CK, 24 HRS, LP: 273#, (OPEN CK TO 25/64"), LLTR: 671 BBLs.
- 01/26/00** **PROG:** FLWD 1,323 MCF, 220 BW, FTP: 430#, CP: 800#, 25/64" CK, 24 HRS, LP: 273, LLTR: 451 BBLs.
IP DATE: 01/24/00. FLWG 1,372 MC, 318 BW, FTP: 430#. CP: 860#, 20/64" CK, LP: 273#.

FINAL REPORT

RECEIVED

FEB 10 2000

**DIVISION OF
OIL, GAS AND MINING**

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

8. WELL NAME and NUMBER:

Exhibit "A"

9. API NUMBER:

1. TYPE OF WELL OIL WELL GAS WELL OTHER _____

2. NAME OF OPERATOR:
El Paso Production Oil & Gas Company

3. ADDRESS OF OPERATOR:
8 South 1200 East CITY Vernal STATE Utah ZIP 84078

PHONE NUMBER:
435-789-4433

10. FIELD AND POOL, OR WILDCAT:

4. LOCATION OF WELL
FOOTAGES AT SURFACE:

COUNTY:

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:

STATE:

UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA



TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Name Change</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

As a result of the merger between The Coastal Corporation and a wholly owned subsidiary of El Paso Energy Corporation, the name of Coastal Oil & Gas Corporation has been changed to El Paso Production Oil & Gas Company effective March 9, 2001.

See Exhibit "A"

Bond # 400JU0708

Coastal Oil & Gas Corporation
NAME (PLEASE PRINT) John T. Elzner TITLE Vice President
SIGNATURE  DATE 06-15-01
El Paso Production Oil & Gas Company
NAME (PLEASE PRINT) John T. Elzner TITLE Vice President
SIGNATURE  DATE 06-15-01

(This space for State use only)

RECEIVED

JUN 19 2001

DIVISION OF
OIL, GAS AND MINING

State of Delaware
Office of the Secretary of State

PAGE 1

I, HARRIET SMITH WINDSOR, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF AMENDMENT OF "COASTAL OIL & GAS CORPORATION", CHANGING ITS NAME FROM "COASTAL OIL & GAS CORPORATION" TO "EL PASO PRODUCTION OIL & GAS COMPANY", FILED IN THIS OFFICE ON THE NINTH DAY OF MARCH, A.D. 2001, AT 11 O'CLOCK A.M.

RECEIVED

MAR 9 2001

DIVISION OF
OIL, GAS AND MINING



Harriet Smith Windsor
Harriet Smith Windsor, Secretary of State

0610204 8100

AUTHENTICATION: 1061007

010162788

DATE: 04-03-01

CERTIFICATE OF AMENDMENT

OF

CERTIFICATE OF INCORPORATION

COASTAL OIL & GAS CORPORATION (the "Company"), a corporation organized and existing under and by virtue of the General Corporation Law of the State of Delaware, DOES HEREBY CERTIFY:

FIRST: That the Board of Directors of the Company, by the unanimous written consent of its members, filed with the minutes of the Board, adopted a resolution proposing and declaring advisable the following amendment to the Certificate of Incorporation of the Company:

RESOLVED that it is deemed advisable that the Certificate of Incorporation of this Company be amended, and that said Certificate of Incorporation be so amended, by changing the Article thereof numbered "FIRST." so that, as amended, said Article shall be and read as follows:


"FIRST. The name of the corporation is El Paso Production Oil & Gas Company."

SECOND: That in lieu of a meeting and vote of stockholders, the stockholders entitled to vote have given unanimous written consent to said amendment in accordance with the provisions of Section 228 of the General Corporation Law of the State of Delaware.

THIRD: That the aforesaid amendment was duly adopted in accordance with the applicable provisions of Sections 242 and 228 of the General Corporation Law of the State of Delaware.

IN WITNESS WHEREOF, said COASTAL OIL & GAS CORPORATION has caused this certificate to be signed on its behalf by a Vice President and attested by an Assistant Secretary, this 9th day of March 2001.

COASTAL OIL & GAS CORPORATION



David L. Siddall
Vice President

Attest:



Margaret E. Roark, Assistant Secretary

RECEIVED

STATE OF DELAWARE
SECRETARY OF STATE
DIVISION OF CORPORATIONS
FILED 11:00 AM 03/09/2001
010118394 - 0610204

JUN 19 2001

DIVISION OF
OIL, GAS AND MINING



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

RECEIVED

JUL 12 2001

DIVISION OF
OIL, GAS AND MINING

In Reply Refer To:
3106
UTSL-065841
(UT-924)

JUL 10 2001

NOTICE

El Paso Production Oil & Gas Company : Oil and Gas
Nine Greenway Plaza :
Houston TX 77046-0095 :

Name Change Recognized

Acceptable evidence has been received in this office concerning the name change of Coastal Oil & Gas Corporation into El Paso Production Oil & Gas Company with El Paso Production Oil & Gas Company being the surviving entity.

For our purposes, the name change is recognized effective March 9, 2001.

The oil and gas lease files identified on the enclosed exhibit have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Coastal Oil & Gas Corporation to El Paso Production Oil & Gas Company. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Wyoming and Colorado.



Opolonia L. Abeyta
Acting Chief, Branch of
Minerals Adjudication

Enclosure

1. Exhibit of Leases (1 pp)

cc: Moab Field Office
Vernal Field Office
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217
~~State of Utah, DOGM,~~ Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114
Teresa Thompson (UT-922)
Joe Incardine (UT-921)

Exhibit of Leases

UTUSL-065841A	UTU-47172	UTU-74415	UTU-53860
UTU-28652	UTU-50687	UTU-74416	UTU-66401
UTU-37943	UTU-52298	UTU-75091	UTU-67868
UTU-44089	UTU-0109054	UTU-75096	UTU-65389
UTU-44090A	UTU-0143511	UTU-75097	UTU-77084
UTU-61263	UTU-0143512	UTU-75673	UTU-61430
UTU-00343	UTU-38401	UTU-76259	UTU-72633
UTU-02651	UTU-38411	UTU-76260	UTU-72650
UTU-02651B	UTU-38418	UTU-76261	UTU-49692
UTU-0142175	UTU-38419	UTU-76493	UTU-57894
UTU-70235	UTU-38420	UTU-76495	UTU-76829
UTU-70406	UTU-38421	UTU-76503	UTU-76830
UTU-74954	UTU-38423	UTU-78228	UTU-76831
UTU-75132	UTU-38424	UTU-78714	
UTU-75699	UTU-38425	UTU-78727	
UTU-76242	UTU-38426	UTU-78734	
UTU-78032	UTU-38427	UTU-79012	
UTU-4377	UTU-38428	UTU-79011	
UTU-4378	UTU-53861	UTU-71694	
UTU-7386	UTU-58097	UTU-00576	
UTU-8344A	UTU-64376	UTU-00647	
UTU-8345	UTU-65222	UTU-01470D	
UTU-8347	UTU-65223	UTU-0136484	
UTU-8621	UTU-66746	UTU-8344	
UTU-14646	UTU-67178	UTU-8346	
UTU-15855	UTU-67549	UTU-8648	
UTU-25880	UTU-72028	UTU-28212	
UTU-28213	UTU-72632	UTU-30289	
UTU-29535	UTU-73009	UTU-31260	
UTU-29797	UTU-73010	UTU-33433	
UTU-31736	UTU-73013	UTU-34711	
UTU-34350	UTU-73175	UTU-46699	
UTU-34705	UTU-73434	UTU-78852	
UTU-37116	UTU-73435	UTU-78853	
UTU-37355	UTU-73444	UTU-78854	
UTU-37573	UTU-73450	UTU-075939	
UTU-38261	UTU-73900	UTU-0149767	
UTU-39223	UTU-74409	UTU-2078	
UTU-40729	UTU-74410	UTU-44426	
UTU-40736	UTU-74413	UTU-49530	
UTU-42469	UTU-74414	UTU-51026	

OPERATOR CHANGE WORKSHEET

ROUTING

1. GLH		4-KAS
2. CDW ✓		5-LP ✓
3. JLT		6-FILE

Enter date after each listed item is completed

Change of Operator (Well Sold)

Designation of Agent

Operator Name Change (Only)

X Merger

The operator of the well(s) listed below has changed, effective: **3-09-2001**

FROM: (Old Operator):
COASTAL OIL & GAS CORPORATION
Address: 9 GREENWAY PLAZA STE 2721
HOUSTON, TX 77046-0995
Phone: 1-(713)-418-4635
Account N0230

TO: (New Operator):
EL PASO PRODUCTION OIL & GAS COMPANY
Address: 9 GREENWAY PLAZA STE 2721 RM 2975B
HOUSTON, TX 77046-0995
Phone: 1-(832)-676-4721
Account N1845

CA No.

Unit: NATURAL BUTTES

WELL(S)

NAME	API NO	ENTITY NO	SEC TWN RNG	LEASE TYPE	WELL TYPE	WELL STATUS
CIGE 135-3-10-21	43-047-32001	2900	03-10S-21E	FEDERAL	GW	P
CIGE 166-3-10-21	43-047-32172	2900	03-10S-21E	FEDERAL	GW	P
CIGE 266-3-10-21	43-047-32995	2900	03-10S-21E	FEDERAL	GW	P
NBU 330	43-047-33228	2900	03-10S-21E	FEDERAL	GW	P
CIGE 225-3-10-21	43-047-33417	99999	03-10S-21E	FEDERAL	GW	APD
NBU 365	43-047-33777	2900	03-10S-21E	FEDERAL	GW	DRL
NBU 28-4B	43-047-30367	2900	04-10S-21E	FEDERAL	GW	P
NBU CIGE 38-4-10-21	43-047-30495	2900	04-10S-21E	FEDERAL	GW	P
NBU 207-4	43-047-31177	2900	04-10S-21E	FEDERAL	GW	P
CIGE 108D-4-10-21	43-047-31756	2900	04-10S-21E	FEDERAL	GW	P
NBU 390-4E	43-047-32835	2900	04-10S-21E	FEDERAL	GW	P
CIGE 206-4-10-21	43-047-32996	2900	04-10S-21E	FEDERAL	GW	P
NBU 326-4E	43-047-33697	2900	04-10S-21E	FEDERAL	GW	P
NBU 29-5B	43-047-30368	2900	05-10S-21E	FEDERAL	GW	P
NBU 12-5-10-21 GR	43-047-30426	11634	05-10S-21E	FEDERAL	GW	P
COG NBU 102	43-047-31757	2900	05-10S-21E	FEDERAL	GW	P
NBU 114	43-047-31923	2900	05-10S-21E	FEDERAL	GW	S
NBU 391-5E	43-047-32988	2900	05-10S-21E	FEDERAL	GW	P
NBU 16-6B	43-047-30316	2900	06-10S-21E	FEDERAL	GW	P
NBU CIGE 30-6-10-21	43-047-30498	2900	06-10S-21E	FEDERAL	GW	S

OPERATOR CHANGES DOCUMENTATION

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 06/19/2001
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 06/19/2001
3. The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 06/21/2001
4. Is the new operator registered in the State of Utah: YES Business Number: 608186-0143

5. If **NO**, the operator was contacted on: N/A
6. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the (merger, name change, or operator change for all wells listed on Federal or Indian leases on: 07/10/2001
7. **Federal and Indian Units:** The BLM or BIA has approved the successor of unit operator for wells listed on: 07/10/2001
8. **Federal and Indian Communization Agreements ("CA"):** The BLM or the BIA has approved the operator change for all wells listed involved in a CA on: 07/10/2001
9. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

DATA ENTRY:

1. Changes entered in the **Oil and Gas Database** on: 08/02/2001
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 08/02/2001
3. Bond information entered in RBDMS on: N/A
4. Fee wells attached to bond in RBDMS on: N/A

STATE BOND VERIFICATION:

1. State well(s) covered by Bond No.: N/A

FEDERAL BOND VERIFICATION:

1. Federal well(s) covered by Bond No.: WY 2793

FEE WELLS - BOND VERIFICATION/LEASE INTEREST OWNER NOTIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond No: N/A
2. The **FORMER** operator has requested a release of liability from their bond on: N/A
The Division sent response by letter on: N/A
3. (R649-2-10) The **FORMER** operator of the Fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: _____

FILMING:

1. All attachments to this form have been **MICROFILMED** on: _____

FILING:

1. **ORIGINALS/COPIES** of all attachments pertaining to each individual well have been filled in each well file on: _____

COMMENTS: Master list of all wells involved in operator change from Coastal Oil & Gas Corporation to El Paso Production Oil and Gas Company shall be retained in the "Operator Change File".

JAN. 17. 2003 3:34PM

WESTPORT

NO. 173 P. 2

**WESTPORT OIL AND GAS COMPANY, L.P.**

410 Seventeenth Street #2300 Denver Colorado 80202-4436
Telephone: 303 573 5404 Fax: 303 573 5409

February 1, 2002

Department of the Interior
Bureau of Land Management
2850 Youngfield Street
Lakewood, CO 80215-7093
Attention: Ms. Martha Maxwell

**RE: BLM Bond CO-1203
BLM Nationwide Bond 158626364
Surety - Continental Casualty Company
Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.
Conversion of Westport Oil and Gas Company, Inc., into Westport Oil and Gas Company, L.P.
Assumption Rider - Westport Oil and Gas Company, L.P.**

Dear Ms. Maxwell:

Pursuant to our recent conversations, please find the following list of enclosures for the BLM's consideration and approval:

**Two (2) Assumption Riders, fully executed originals.
Copies of Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.
Copies of Westport Oil and Gas Company, Inc., conversion into Westport Oil and Gas Company, L.P.
List of all Federal/BIA/State Leases - Belco/Westport's leases - in all states.**

Please inform us of any additional information needed to complete the change to Westport Oil and Gas Company, L.P., as operator of record.

I thank you for your assistance and cooperation in this matter. Please do not hesitate contacting the undersigned, should a question arise.

Sincerely,
Westport Oil and Gas Company, L.P.

Debby J. Black
Engineer Technician

Encl:



United States Department of the Interior **RECEIVED**

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

FEB 22 2002

DIVISION OF
OIL, GAS AND MINING

In Reply Refer To:
3106
UTU-25566 et al
(UT-924)

FEB 21 2002

NOTICE

Westport Oil and Gas Company L.P. : Oil and Gas
410 Seventeenth Street, #2300 :
Denver Colorado 80215-7093 :

Name Change Recognized

Acceptable evidence has been received in this office concerning the name change of Westport Oil and Gas Company, Inc. into Westport Oil and Gas Company, L.P. with Westport Oil and Gas Company, L.P. being the surviving entity.


For our purposes, the name change is recognized effective December 31, 2001.

The oil and gas lease files identified have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Westport Oil and Gas Company, Inc. to Westport Oil and Gas Company, L.P.. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Colorado.

UTU-03405
UTU-20895
UTU-25566
UTU-43156
UTU-49518
UTU-49519
UTU-49522
UTU-49523



Robert Lopez
Chief, Branch of
Minerals Adjudication

cc: Moab Field Office
Vernal Field Office
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217
State of Utah, DOGM, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114
Teresa Thompson (UT-922)
Joe Incardine (UT-921)

memorandum

Branch of Real Estate Services
Uintah & Ouray Agency

Date: 5 December, 2002

Reply to
Attn of: Supervisory Petroleum Engineer

Subject: Modification of Utah Division of Oil, Gas and Mining Regulations

To: Director, Utah Division of Oil, Gas and Mining Division: John Baza

We have been advised of changes occurring with the operation of your database for Change of Operator. You will be modifying your records to reflect Change of Operator once you have received all necessary documentation from the companies involved, and perhaps in advance of our Notice of Concurrence/Approval of Change of Operator where Indian leases are involved.

We have no objection.

With further comment to Rulemaking, I wish to comment concerning the provision of Exhibits for upcoming Hearings. I would like to see the Uintah & Ouray Agency, BIA, and the Ute Indian Tribe, Energy & Mineral Resources Department added to the list of those parties that receive advance Exhibits so as to allow us to have research time prior to Hearing dates. We will be able to provide a more informed recommendation to the Oil, Gas and Mining Board. It would be best if we would receive only those Exhibits that concern Indian lands, specifically on or adjacent to Indian lands. This may be a difficult situation to attain, as it is not always clear where 'on or adjacent' occurs.

I am aware that you have gone to extra effort to correct this matter already, and I fully appreciate it. My request is intended only to allow the addition of Uintah & Ouray Agency and Ute Indian Tribe to the official listing.

We appreciate your concern, and hope that these comments are timely enough for consideration in the revision process.

CC: Minerals & Mining Section of RES
Ute Energy & Mineral Resources Department: Executive Director
chrono



UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
U-0149078

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

7. If Unit or CA/Agreement, Name and/or No.
NATURAL BUTTES

1. Type of Well
 Oil Well Gas Well Other

8. Well Name and No.
CIGE 226

2. Name of Operator **EL PASO PRODUCTION O&G COMPANY** Contact: **SHEILA UPCHEGO**
E-Mail: sheila.upchego@EIPaso.com

9. API Well No.
43-047-32995

3a. Address
P.O. BOX 1148
VERNAL, UT 84078

3b. Phone No. (include area code)
Ph: 435.781.7024
Fx: 435.781.7094

10. Field and Pool, or Exploratory
NATURAL BUTTES

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 3 T10S R21E SESW 817FSL 2620FWL

11. County or Parish, and State
UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input checked="" type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

1/4/03 PMP 30 BBLS 2% KCL DWN CSG. CLEAN OUT SAND & GRIT. PMP 40 BBLS 2% KCL DWN CSG. R/U 1.912" PINEAPPLE BROACH & RIH STACK OUT @5200'. PMP 40 BBLS 2% KCL DWN CSG, TO KILL WELL. CONT TO POOH W/TBG F/5000'. PMP 500 GAL 15% HCL DISPLACED W/30.7 BBLS 2% KCL. PMP 700 GAL 15% HCL DWN TBG. DISPLACED W/27.5 BBLS 2% KCL PMP 300 GAL 15% HCL DWN TBG. DISPLACED W/22 BBLS KCL. RDMO

RECEIVED

JAN 16 2003


DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct.

**Electronic Submission #17601 verified by the BLM Well Information System
For EL PASO PRODUCTION O&G COMPANY, sent to the Vernal**

Name (Printed/Typed) **SHEILA UPCHEGO**

Title **REGULATORY ANALYST**

Signature (Electronic Submission) 

Date **01/13/2003**

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ****



IN REPLY REFER TO:
Real Estate Services

United States Department of the Interior

BUREAU OF INDIAN AFFAIRS
Washington, D.C. 20240

FEB 10 2003

Carroll A. Wilson
Principal Landman
Westport Oil and Gas Company, L.P.
1368 South 1200 East
Vernal, Utah 84078

Dear Mr. Wilson:

This is in response to your request for approval of RLI Insurance Company's Nationwide Oil and Gas Lease Bond No. RLB0005239 executed effective December 17, 2002, (\$150,000 coverage) with Westport Oil and Gas Company, L. P., as principal.

This bond is hereby approved as of the date of this correspondence and will be retained in the Bureau of Indian Affairs' Division of Real Estate Services, 1849 C Street, NW, MS-4512-MIB, Washington, D.C. 20240. All Bureau oil and gas regional offices and the surety are being informed of this action.

In cases where you have existing individual and/or collective bonds on file with one or more of our regional offices, you may now request those offices, directly, to terminate in lieu of coverage under this Nationwide Bond.

Enclosed is a copy of the approved bond for your files. If we may be of further assistance in this matter, please advise.

Sincerely,

A handwritten signature in black ink, appearing to read "Perry E. Brown".

Director, Office of Trust Responsibilities

ACTING

Enclosure



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

IN REPLY REFER TO
UT-922

February 27, 2003

Westport Oil and Gas Company, L.P.
Attn: Gary D. Williamson
1670 Broadway, Suite 2800
Denver, Colorado 80202

Re: Natural Buttes Unit
Uintah County, Utah

Gentlemen:

On February 27, 2003, we received an indenture dated December 17, 2002, whereby El Paso Production Oil & Gas Company resigned as Unit Operator and Westport Oil and Gas Company, L.P., was designated as Successor Unit Operator for the Natural Buttes Unit, Uintah County, Utah.

This indenture was executed by all required parties and the signatory parties have complied with Sections 5 and 6 of the unit agreement. The instrument is hereby approved effective February 27, 2003. In approving this designation, the Authorized Officer neither warrants nor certifies that the designated party has obtained all required approval that would entitle it to conduct operations under the Natural Buttes Unit Agreement.

Your nationwide (Colorado) oil and gas bond No. 1203 will be used to cover all operations within the Natural Buttes Unit.

It is requested that you notify all interested parties of the change in unit operator. Copies of the approved instruments are being distributed to the appropriate federal offices, with one copy returned herewith.

Sincerely,

/s/ Robert A. Henricks

Robert A. Henricks
Chief, Branch of Fluid Minerals

Enclosure

bcc: Field Manager - Vernal (w/enclosure)
SITLA
Division of Oil, Gas & Mining
Minerals Adjudication Group
File - Natural Buttes Unit (w/enclosure)
Agr. Sec. Chron
Fluid Chron

UT922:TAThompson:tt:02/27/2003

RECEIVED

FEB 28 2003

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER:
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME:
2. NAME OF OPERATOR: El Paso Production Oil & Gas Company		8. WELL NAME and NUMBER: Exhibit "A"
3. ADDRESS OF OPERATOR: 9 Greenway Plaza Houston TX 77064-0995		9. API NUMBER:
PHONE NUMBER: (832) 676-5933		10. FIELD AND POOL, OR WILDCAT:
4. LOCATION OF WELL FOOTAGES AT SURFACE: _____ COUNTY: _____ QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: _____ STATE: UTAH		


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Operator change to Westport Oil and Gas Company, L.P., 1670 Broadway, Suite 2800, Denver, CO. 80202-4800, effective December 17, 2002.

BOND # _____
State Surety Bond No. RLB0005236
Fee Bond No. RLB0005238

EL PASO PRODUCTION OIL & GAS COMPANY

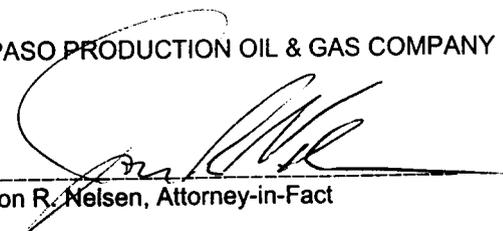By: 
Jon R. Nelsen, Attorney-in-Fact

RECEIVED
FEB 28 2003
DIV. OF OIL, GAS & MINING

NAME (PLEASE PRINT) WESTPORT OIL AND GAS COMPANY, L.P. David R. Dix	TITLE Agent and Attorney-in-Fact
SIGNATURE 	DATE 12/17/02

(This space for State use only)

Form 3160-5
(August 1999)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

5. Lease Serial No.
SEE ATTACHED EXHIBIT "A"

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

WESTPORT OIL & GAS COMPANY, L.P.

3a. Address

P.O. BOX 1148 VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7023

8. Well Name and No.

SEE ATTACHED EXHIBIT "A"

9. API Well No.

SEE ATTACHED EXHIBIT "A"

10. Field and Pool, or Exploratory Area

SEE ATTACHED EXHIBIT "A"

11. County or Parish, State

UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other
			SUCCESSOR OF OPERATOR

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration then. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zc Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator determined that the site is ready for final inspection.

WESTPORT OIL & GAS COMPANY, L.P., IS CONSIDERED TO BE THE OPERATOR ON THE ATTACHED DESCRIBED LANDS AND IS RESPONSIBLE UNDER THE TERMS AND CONDITIONS OF THE LEASE FOR THE OPERATIONS CONDUCTED ON THE LEASED LANDS OR PORTIONS THEREOF, BOND COVERAGE FOR THIS WELL IS PROVIDED BY FEDERAL NATIONWIDE BOND NO. 158626364, EFFECTIVE FEBRUARY 1, 2002, AND BIA NATIONWIDE BOND NO. RLB0005239, EFFECTIVE FEBRUARY 10, 2003.

RECEIVED

MAR 04 2003

BUREAU OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

CHERYL CAMERON

Title

OPERATIONS

Signature

Date

March 4, 2003

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

OPERATOR CHANGE WORKSHEET

1. GLH
2. CDW <input checked="" type="checkbox"/>
3. FILE

X Change of Operator (Well Sold)

Designation of Agent/Operator

Operator Name Change

Merger

The operator of the well(s) listed below has changed, effective: 12-17-02	
FROM: (Old Operator):	TO: (New Operator):
EL PASO PRODUCTION OIL & GAS COMPANY	WESTPORT OIL & GAS COMPANY LP
Address: 9 GREENWAY PLAZA	Address: P O BOX 1148
HOUSTON, TX 77064-0995	VERNAL, UT 84078
Phone: 1-(832)-676-5933	Phone: 1-(435)-781-7023
Account No. N1845	Account No. N2115

CA No. Unit: NATURAL BUTTES

WELL(S)	SEC TWN RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
NBU CIGE 18-2-10-21	02-10S-21E	43-047-30471	2900	STATE	GW	P
NBU CIGE 80D-2-10-21	02-10S-21E	43-047-30853	2900	STATE	GW	P
CIGE 285	02-10S-21E	43-047-34793	99999	STATE	GW	APD
NBU CIGE 40-3-10-21	03-10S-21E	43-047-30740	2900	FEDERAL	GW	P
NBU CIGE 93D-3-10-21J	03-10S-21E	43-047-31163	2900	FEDERAL	GW	P
NBU CIGE 135-3-10-21	03-10S-21E	43-047-32001	2900	FEDERAL	GW	S
COG NBU 101	03-10S-21E	43-047-31755	2900	FEDERAL	GW	P
CIGE 166-3-10-21	03-10S-21E	43-047-32172	2900	FEDERAL	GW	P
CIGE 225-3-10-21	03-10S-21E	43-047-33417	99999	FEDERAL	GW	APD
CIGE 226-3-10-21	03-10S-21E	43-047-32995	2900	FEDERAL	GW	S
NBU 330	03-10S-21E	43-047-33228	2900	FEDERAL	GW	P
NBU 331	03-10S-21E	43-047-33229	2900	FEDERAL	GW	PA
NBU 365	03-10S-21E	43-047-33777	2900	FEDERAL	GW	P
NBU 25	03-10S-21E	43-047-30237	2900	FEDERAL	GW	PA
CIGE 206-4-10-21	04-10S-21E	43-047-32996	2900	FEDERAL	GW	P
NBU 326-4E	04-10S-21E	43-047-33697	2900	FEDERAL	GW	P
CIGE 108D-4-10-21	04-10S-21E	43-047-31756	2900	FEDERAL	GW	P
CIGE 136-4-10-21	04-10S-21E	43-047-31979	2900	STATE	GW	S
NBU 207-4J	04-10S-21E	43-047-31177	2900	FEDERAL	GW	P
NBU 28-4B	04-10S-21E	43-047-30367	2900	FEDERAL	GW	P

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 02/28/2003
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 03/04/2003
3. The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 03/06/2003
4. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
5. If **NO**, the operator was contacted on: _____

6. (R649-9-2)Waste Management Plan has been received on: IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM-12/31/2003 BIA-12/5/02

8. **Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: 02/27/2003

9. **Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: N/A

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

DATA ENTRY:

1. Changes entered in the Oil and Gas Database on: 03/19/2003
2. Changes have been entered on the Monthly Operator Change Spread Sheet on: 03/19/2003
3. Bond information entered in RBDMS on: N/A
4. Fee wells attached to bond in RBDMS on: N/A

STATE WELL(S) BOND VERIFICATION:

1. State well(s) covered by Bond Number: RLB 0005236

FEDERAL WELL(S) BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: 158626364

INDIAN WELL(S) BOND VERIFICATION:

1. Indian well(s) covered by Bond Number: RLB 0005239

FEE WELL(S) BOND VERIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB 0005238
2. The **FORMER** operator has requested a release of liability from their bond on: N/A
The Division sent response by letter on: N/A

LEASE INTEREST OWNER NOTIFICATION:

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: N/A

COMMENTS:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
Multiple Wells - see attached

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
891008900A

8. Well Name and No.
Multiple Wells - see attached

9. API Well No.
Multiple Wells - see attached

10. Field and Pool, or Exploratory Area
Natural Buttes Unit

11. County or Parish, State
Uintah County, UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY, L.P.

3a. Address
P.O. BOX 1148 VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Multiple Wells - see attached

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

Westport Oil & Gas requests a variance to Onshore Order No. 4, Part IIC.a. requiring each sales tank be equipped with a pressure-vacuum thief hatch and/or vent line valve. The variance is requested as an economic analysis shows the value of the shrunk condensate will not payout the incremental cost of purchasing and maintaining the valve resulting in a loss of value over the producing life of the well.

The volume lost to shrinkage by dropping the tank pressure from 6 ozs. to 0 psig is shown to be 0.3% of the tank volume. This was determined by lab analysis of a representative sample from the field. The sample shrunk from 98.82% of original volume to 98.52% when the pressure was dropped. The average NBU well produces approximately 6 bbls condensate per month. The resulting shrinkage would amount to 0.56 bbls per month lost volume due to shrinkage. The value of the shrunk and lost condensate does not recoup or payout the cost of installing and maintaining the valves and other devices that hold the positive tank pressure. An economic run based on the loss and costs is attached.


Westport Oil & gas requests approval of this variance in order to increase the value of the well to the operator and the mineral royalty owners.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

J.T. Conley

Signature



COPY SENT TO OPERATOR

Date: 9-16-03

Initials: JTC Date: 9-2-2003

Title

Operations Manager

SEP 10 2003

DIV. OF OIL GAS & MINING

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Accepted by the
Utah Division of
Oil, Gas and Mining

Date

Federal Approval of This
Action is Necessary

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Date: 9/16/03

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

WELL	LEGALS	STFLEASENO	CANUMBER	APINO
CIGE 172	25-9-21 SWNE	U01189	891008900A	430473232500S1 ✓
CIGE 173	32-9-22 SWNW	ML22649	891008900A	430473232400S1 ✓
CIGE 174	33-9-22 NESW	UTU01191A	891008900A	430473232300S1
CIGE 177	1-10-20 NENW	UTU02270A	891008900A	430473232200S1
CIGE 178	5-10-22 NWNW	UTU01195	891008900A	430473233000S1
CIGE 179	6-10-22 SESW	UTU01195	891008900A	430473240000S1
CIGE 180	16-9-21 SESW	ML3141	891008900A	430473247800S1
CIGE 182	7-10-21 SESE	UTU02270A	891008900A	430473248100S1
CIGE 183	20-9-21 NWSE	UTU0575	891008900A	430473265600S1
CIGE 186	35-9-22 NWSE	UTU010954A	891008900A	430473259000S1
CIGE 187	13-10-20 NENW	UTU4485	891008900A	43047326700S1
CIGE 189	29-9-22 SWNW	UTU462	891008900A	430473286300S1
CIGE 190	32-9-22 NENE	ML22649	891008900A	430473291200S1
CIGE 193	35-9-22 SESE	UTU010954A	891008900A	430473297300S1
CIGE 194	1-10-22 SWNW	U011336	891008900A	430473293200S1
CIGE 195	2-10-22 NWNE	ML22651	891008900A	430473279700S1 ✓
CIGE 196	6-10-22 SESE	UTU01195	891008900A	430473300300S1
CIGE 197	7-9-21 NWNE	UTU0149767	891008900A	430473279800S1
CIGE 198	9-9-21 NESE	UTU01188	891008900A	430473279900S1
CIGE 199	14-9-21 NENW	UTU01193	891008900A	430473280100S1
CIGE 200	16-9-21 SENW	UTU38409	891008900A	430473280200S1
CIGE 201	18-9-21 SENE	UTU0575	891008900A	430473280400S1
CIGE 202	21-9-21 SESE	UTU0576	891008900A	430473280500S1
CIGE 203	34-9-21 NWNE	UTU01194A	891008900A	430473288100S1 ✓
CIGE 204	35-9-21 SWNE	ML22582	891008900A	430473279400S1 ✓
CIGE 205	1-10-21 SWNE	ML23612	891008900A	430473279500S1 ✓
CIGE 206	4-10-21 SESE	U01416	891008900A	430473299800S1
CIGE 207	8-10-21 NENE	UTU01791	891008900A	430473297500S1
CIGE 208	8-10-21 SWNE	UTU01791	891008900A	430473299700S1
CIGE 209	15-10-21 NENW	UTU01791A	891008900A	430473294300S1
CIGE 210	16-10-21 NESE	ML10755	891008900A	430473288800S1
CIGE 212	34-9-22 NENE	UTU0149077	891008900A	430473293800S1
CIGE 213	33-9-22 SENW	UTU01191A	891008900A	430473293300S1
CIGE 214	13-9-21 NESW	U01193	891008900A	430473291800S1
CIGE 215X	15-9-21 NENE	UTU01188	891008900A	430473369000S1
CIGE 216	15-9-21 SWNE	UTU01193	891008900A	430473292000S1
CIGE 217	16-9-21 NWSW	ML3141	891008900A	430473289800S1
CIGE 218	19-9-21 NWNE	U0581	891008900A	430473292100S1
CIGE 219	29-9-22 NESW	U01207	891008900A	430473286400S1 ✓
CIGE 220	31-9-22 SWNE	U10530A	891008900A	430473288400S1 ✓
CIGE 221	36-9-22 SWSW	ML22650	891008900A	430473286800S1 ✓
CIGE 222	36-9-22 NESW	ML22650	891008900A	430473286900S1 ✓
CIGE 223	1-10-22 NWNW	U011336	891008900A	430473298300S1
CIGE 224	2-10-21 SWNE	ML2252	891008900A	430473288300S1 ✓
CIGE 225	3-10-21 SENW	UTU0149078	891008900A	430473489500S1
CIGE 226	3-10-21 SESW	U0149078	891008900A	430473299500S1
CIGE 227	9-10-21 SESE	UTU01791	891008900A	430473299800S1
CIGE 228	15-10-21 SWNE	UTU01416A	891008900A	430473299900S1
CIGE 229	1-10-20 NWSW	UTU02270A	891008900A	430473300600S1
CIGE 230	13-10-20 SENE	UTU02270A	891008900A	430473288500S1
CIGE 231	7-9-21 SENE	UTU0575B	891008900A	430473302100S1
CIGE 232	9-9-21 NENE	UTU01188A	891008900A	430473283800S1
CIGE 233	21-9-21 NWNE	UTU0576	891008900A	430473302200S1
CIGE 234	25-9-21 SWNE	U01189	891008900A	430473287300S1 ✓
CIGE 235	25-9-21 NWSE	U01194	891008900A	430473285800S1 ✓
CIGE 236	34-9-21 SESE	U01194A	891008900A	430473286100S1 ✓
CIGE 237	15-9-21 NWSE	UTU010950A	891008900A	430473387800S1
CIGE 239	35-9-21 SENE	ML22582	891008900A	430473320600S1 ✓
CIGE 240	29-9-22 SENW	ML22935	891008900A	430473320700S1
CIGE 241	32-9-22 NENW	ML22649	891008900A	430473320800S1
CIGE 242	33-9-22 NWNW	UTU01191A	891008900A	430473402200S1

Westport Oil & Gas, L.P.
Project Economics Works!

Instructions:

Fill in blue areas with before and after project data. The evaluation results are shown below and graphed automatically at the bottom of the page. This sheet is protected to prevent accidental alteration of the formulas. See JTC for changes. OPX entered as annual costs and/or as unit OPX costs for \$/BF and \$/MCF

Project Name:

Condensate Shrinkage Economics

Is this job a well pull or production rig job ??? N (Y or N)

	BEFORE \$/Year	AFTER \$/Year	DIFFERENCE \$/Year
Gross Oil Revenue	\$1,088	\$1,099	\$11
Gross Gas Revenue	\$0	\$0	\$0
NGL Revenue	\$0	\$0	\$0
PULING UNIT SERVICE			\$0
WIRELINE SERVICE			\$0
SUBSURF EQUIP REPAIRS			\$0
COMPANY LABOR			\$0
CONTRACT LABOR	\$0	\$200	\$200
CONTR SERVICE			\$0
LEASE FUEL GAS	\$0	\$0	\$0
UTILITIES - ELECTRICITY	\$0	\$0	\$0
CHEMICAL TREATING			\$0
MATERIAL & SUPPLY	\$0	\$150	\$150
WATER & HAULING			\$0
ADMINISTRATIVE COSTS			\$0
GAS PLANT PROCESSING			\$0
Totals	\$0	\$350	\$350

Increased OPX Per Year

Investment Breakdown:

Cap/Exp Code	Cost, \$
Capital \$	820/830/840 \$1,200
Expense \$	830/840 \$0
Total \$	\$1,200

Oil Price	\$ 23.00	\$/BO
Gas Price	\$ 3.10	\$/MCF
Electric Cost	\$ -	\$/ HP / day
OPX/BF	\$ 2.00	\$/BF
OPX/MCF	\$ 0.62	\$/MCF

Production & OPX Detail:

	Before		After		Difference	
Oil Production	0.192	BOPD	0.194	BOPD	0.002	BOPD
Gas Production	0	MCFPD	0	MCFPD	0	MCFPD
Wtr Production	0	BWPD	0	BWPD	0	BWPD
Horse Power		HP		HP	0	HP
Fuel Gas Burned		MCFPD		MCFPD	0	MCFPD

Project Life:

Life = Years
 (Life no longer than 20 years)

Internal Rate of Return:

After Tax IROR =

AT Cum Cashflow:

Operating Cashflow = (Discounted @ 10%)

Payout Calculation:

$$\text{Payout} = \frac{\text{Total Investment}}{\text{Sum(OPX + Incremental Revenue)}} = 1$$

Payout occurs when total AT cashflow equals investment
 See graph below, note years when cashflow reaches zero

Payout = Years or Days


Gross Reserves:

Oil Reserves = 4 BO
 Gas Reserves = 0 MCF
 Gas Equiv Reserves = 38 MCFE

Notes/Assumptions:

An average NBU well produces 0.192 bcpd with no tank pressure. The production is increased to 0.194 bcpd if 4 ozs of pressure are placed on the tank. The increased production does not payout the valve cost or the estimated annual maintenance costs.

Project: Condensate Shrinkage Economics

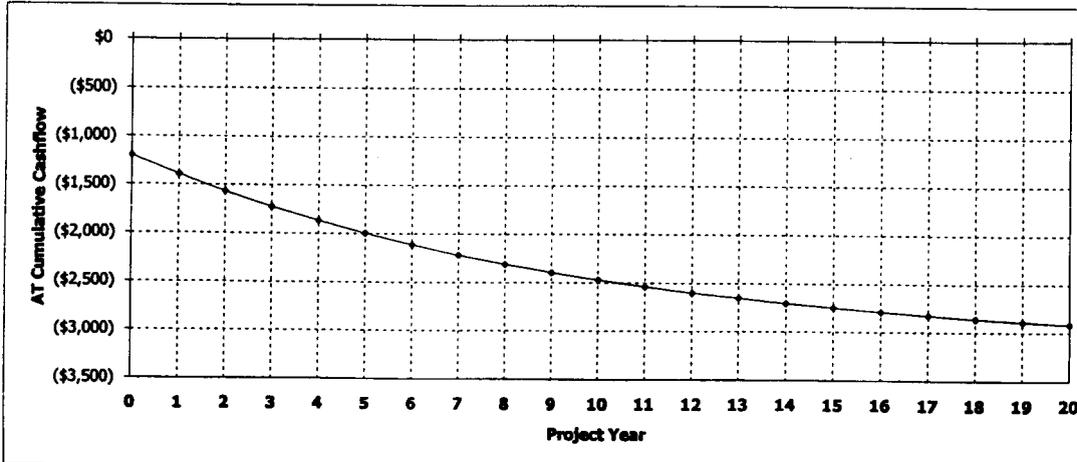

Westport Oil and Gas, Inc.

NBU/Ouray Field

RFL 2003-022

COMPARISON OF FLASH BACK PRESSURES

Calculated by Characterized Equation-of-State

Flash Conditions		Gas/Oil Ratio (scf/STbbl) (A)	Specific Gravity of Flashed Gas (Air=1.000)	Separator Volume Factor (B)	Separator Volume Percent (C)
psig	°F				

Calculated at Laboratory Flash Conditions

80	70			1.019	
0	122	30.4	0.993	1.033	101.37%
0	60	0.0	—	1.000	98.14%

Calculated Flash with Backpressure using Tuned EOS

80	70			1.015	
6.0 oz	65	24.6	0.777	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
4.0 oz	65	24.7	0.778	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
2.0 oz	65	24.7	0.779	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
0	65	24.8	0.780	1.003	98.82%
0	60	0.0	—	1.000	98.52%

(A) Cubic Feet of gas at 14.696 psia and 60 °F per Barrel of Stock Tank Oil at 60 °F.

(B) Barrels of oil at indicated pressure and temperature per Barrel of Stock Tank Oil at 60 °F.

(C) Oil volume at indicated pressure and temperature as a percentage of original saturated oil volume.

Note: Bubblepoint of sample in original sample container was 80 psig at 70° F with 1 cc water

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
U-0149078

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
**UNIT #891008900A
NATURAL BUTTES UNIT**

8. Well Name and No.
CIGE 226

9. API Well No.
4304732995

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR-McGEE OIL & GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SESW SEC. 10 , T10S, R21E 817'FSL, 2620'FWL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input checked="" type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	_____
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	_____

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

07/10/2006: PMP 2 BBLs KCL KILL 2 DRUMS OF ACID & 23 BBLs KCL FLUSH DWN TBG.

RECEIVED
AUG 31 2006
DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Sheila Upchego	Title Regulatory Analyst
Signature 	Date August 28, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING
1. DJJ
2. CDW

X Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:		1/6/2006
FROM: (Old Operator): N2115-Westport Oil & Gas Co., LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024	TO: (New Operator): N2995-Kerr-McGee Oil & Gas Onshore, LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024	

WELL NAME	CA No.	Unit:	NATURAL BUTTES UNIT					
	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- a. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- b. If **NO**, the operator was contacted on:
- 5a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- 5b. Inspections of LA PA state/fee well sites complete on: n/a 3 LA wells & all PA wells transferred
- 5c. Reports current for Production/Disposition & Sundries on: ok
- 6. Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet
- 7. Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006
- 8. Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: n/a
- 9. Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on:

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 5/15/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
- Bond information entered in RBDMS on: 5/15/2006
- Fee/State wells attached to bond in RBDMS on: 5/16/2006
- Injection Projects to new operator in RBDMS on: _____
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: CO1203
- Indian well(s) covered by Bond Number: RLB0005239
- (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- a. The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG
The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

COMMENTS:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR-McGEE OIL & GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEE ATTACHED

5. Lease Serial No.
MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State
UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006. KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

RECEIVED

MAY 10 2006

DIV. OF OIL, GAS & MINING

*BLM BOND = C01203
BIA BOND = RLB0005239*

APPROVED 5/16/06

Earlene Russell
**Division of Oil, Gas and Mining
 Earlene Russell, Engineering Technician**

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) RANDY BAYNE	Title DRILLING MANAGER
Signature <i>Randy Bayne</i>	Date May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY L.P.

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEE ATTACHED

5. Lease Serial No.
MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State
UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

APPROVED 5/16/06
Earlene Russell
 Division of Oil, Gas and Mining
 Earlene Russell, Engineering Technician

RECEIVED
 MAY 10 2006

DIV OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) BRAD LANEY	Title ENGINEERING SPECIALIST
Signature	Date May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by <i>Brad Laney</i>	Title	Date 5-9-06
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
Colorado State Office
2850 Youngfield Street
Lakewood, Colorado 80215-7076

IN REPLY REFER TO:

CO922 (MM)
3106
COC017387 et. al.

March 23, 2006

NOTICE

Kerr-McGee Oil & Gas Onshore L.P. :
1999 Broadway, Suite 3700 : Oil & Gas
Denver, CO 80202 :

Merger/Name Change - Recognized

On February 28, 2006 this office received acceptable evidence of the following mergers and name conversion:

Kerr-McGee Oil & Gas Onshore L.P., a Delaware Limited Partnership, and Kerr-McGee Oil & Gas Onshore LLC, a Delaware Limited Partnership merger with and into Westport Oil and Gas Company L.P., a Delaware Limited Partnership, and subsequent Westport Oil & Gas Company L.P. name conversion to Kerr-McGee Oil & Gas Onshore L.P.

For our purposes the merger and name conversion was effective January 4, 2006, the date the Secretary of State of Delaware authenticated the mergers and name conversion.

Kerr-McGee Oil & Gas Onshore L.P. provided a list of oil and gas leases held by the merging parties with the request that the Bureau of Land Management change all their lease records from the named entities to the new entity, Kerr-McGee Oil & Gas Onshore L.P. In response to this request each state is asked to retrieve their own list of leases in the names of these entities from the Bureau of Land Management's (BLM) automated LR2000 data base.

The oil and gas lease files identified on the list provided by Kerr-McGee Oil & Gas Onshore L.P. have been updated as to the merger and name conversion. We have not abstracted the lease files to determine if the entities affected by the acceptance of these documents holds an interest in the lease, nor have we attempt to identify leases where the entity is the operator on the ground that maintains vested record title or operating rights interests. If additional documentation, for change of operator, is required you will be contacted directly by the appropriate Field Office. The Mineral Management Services (MMS) and other applicable BLM offices were notified of the merger with a copy of this notice

Please contact this office if you identify additional leases where the merging party maintains an interest, under our jurisdiction, and we will document the case files with a copy of this notice. If the leases are under the jurisdiction of another State Office that information will be forwarded to them for their action.

Three riders accompanied the merger/name conversion documents which will add Kerr-McGee Oil and Gas Onshore LLC as a principal to the 3 Kerr-McGee bonds maintained by the Wyoming State Office. These riders will be forward to them for their acceptance.

The Nationwide Oil & Gas Continental Casualty Company Bond #158626364 (BLM Bond #CO1203), maintained by the Colorado State Office, will remain in full force and effect until an assumption rider is accepted by the Wyoming State Office that conditions their Nationwide Safeco bond to accept all outstanding liability on the oil and gas leases attached to the Colorado bond.

If you have questions about this action you may call me at 303.239.3768.

/s/Martha L. Maxwell
Martha L. Maxwell
Land Law Examiner
Fluid Minerals Adjudication

Attachment:

List of OG Leases to each of the following offices:

MMS MRM, MS 357B-1

WY, UT, NM/OK/TX, MT/ND, WY State Offices

CO Field Offices

Wyoming State Office

Rider #1 to Bond WY2357

Rider #2 to Bond WY1865

Rider #3 to Bond WY1127



United States Department of the Interior



BUREAU OF LAND MANAGEMENT
Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155
<http://www.blm.gov>

IN REPLY REFER TO:
3106
(UT-922)

March 27, 2006

Memorandum

To: Vernal Field Office

From: Chief, Branch of Fluid Minerals

Subject: Merger Approval

Attached is an approved copy of the merger recognized by the Bureau of Land Management, Colorado State Office. We have updated our records to reflect the merger from Westport Oil and Gas Company L.P. into Kerr-McGee Onshore Oil and Gas Company. The merger was approved effective January 4, 2006.

Chief, Branch of
Fluid Minerals

Enclosure

Approval letter from BLM COSO (2 pp)

cc: MMS, Reference Data Branch, James Sykes, PO Box 25165, Denver CO 80225
State of Utah, DOGM, Attn: Earlene Russell, PO Box 145801, SLC UT 84114
Teresa Thompson
Joe Incardine
Connie Seare
Dave Mascarenas
Susan Bauman

RECEIVED

MAR 28 2006

DIV. OF OIL, GAS & MINERAL

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: U-0149078
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: CIGE 226
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.	9. API NUMBER: 43047329950000
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	PHONE NUMBER: 720 929-6007 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0817 FSL 2620 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 03 Township: 10.0S Range: 21.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 11/10/2009	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input checked="" type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: _____

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
 THIS WELL RETURNED TO PRODUCTION ON 11/10/2009 AT 12:00 P.M.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
 November 17, 2009

NAME (PLEASE PRINT) Andy Lytle	PHONE NUMBER 720 929-6100	TITLE Regulatory Analyst
SIGNATURE N/A		DATE 11/16/2009