

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE*
(Other instructions on
reverse side)

FORM APPROVED
OMB NO. 1004-0136
Expires: February 28, 1995

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK

DRILL DEEPEN

b. TYPE OF WELL

OIL WELL GAS WELL OTHER SINGLE ZONE MULTIPLE ZONE

CONFIDENTIAL

2. NAME OF OPERATOR

CNG PRODUCING COMPANY

3. ADDRESS AND TELEPHONE NO.

CNG TOWER - 1450 POYDRAS STREET, NEW ORLEANS, LA 70112-6000

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements*)

At surface 1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E

At proposed prod. zone

CONFIDENTIAL

5. LEASE DESIGNATION AND SERIAL NO.
U-013793-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME
RIVERBEND UNIT

8. FARM OR LEASE NAME WELL NO.

RBU 6-23F

9. API WELL NO.

10. FIELD AND POOL, OR WILDCAT

NATURAL BUTTES 630

11. SEC. T., R., M., OR BLK.
AND SURVEY OR AREA

23-T10S-R20E

12. COUNTY OR PARISH UTAH 13. STATE UTAH

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*
10 MILES SW OF OURAY

15. DISTANCE FROM PROPOSED*
LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT.

(Also to nearest drlg. line, if any) 3,528

16. NO. OF ACRES IN LEASE

1,600

17. NO. OF ACRES ASSIGNED
TO THIS WELL

80 ACRES

18. DISTANCE FROM PROPOSED LOCATION*
TO NEAREST WELL, DRILLING, COMPLETED,
OR APPLIED FOR, ON THIS LEASE, F 1,850

19. PROPOSED DEPTH

6450

20. ROTARY OR CABLE TOOLS

ROTARY

21. ELEVATIONS (Show whether DF, RT, GR, etc.)
UNGRADED 5,007.8'


22. APPROX. DATE WORK WILL START
JUNE 15, 1998

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4"	8 5/8"	24#	+/- 350	
7 7/8"	5 1/2"	17#	+/- 6,450	

1. Drill a 12 1/4" hole with an air rig to ±350', run 8 5/8", K-55 casing and cement to surface.
2. Nipple up and pressure test BOP stack prior to drilling out below surface pipe.
3. Operate pipe rams daily and blind rams as possible.
4. Drill a 7 7/8" hole to 6,450' with a KCL water mud system. Coring is possible. DST's will be run as needed to evaluate unexpected shows.
5. Run logs, set 5 1/2" 17# N-80 casing as dictated by drilling shows, tests, and logs. Casing program may be modified to provide added burst strength if needed for frac program.
6. Primary zones of interests are the Wasatch, Chapita Wells and Ute land Buttes.
7. All zones indicating potential for economically recoverable reserves will be tested in a normal, prudent manner.
8. In the event circulation is lost, air or air assisted mud will be utilized.

FORMATION TOPS	DEPTHS
Wasatch Tongue	3,865'
Green River Tongue	4,215'
Wasatch	4,340'
Chapita Wells	5,065'
Ute land Buttes	6,050'



IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

SIGNED Susan Sachitara TITLE Onshore Drilling Manager

DATE March 30, 1998

(This space for Federal or State office use)

PERMIT NO. 43-047-33087 APPROVAL DATE _____

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations there

CONDITIONS OF APPROVAL, IF ANY: **Federal Approval of this Action is Necessary**

BRADLEY G. HILL
RECLAMATION SPECIALIST III


APPROVED BY Bradley Hill TITLE _____ DATE 4/13/98

*See Instructions On Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

T10S, R20E, S.L.B.&M.

CNG PRODUCING CO.

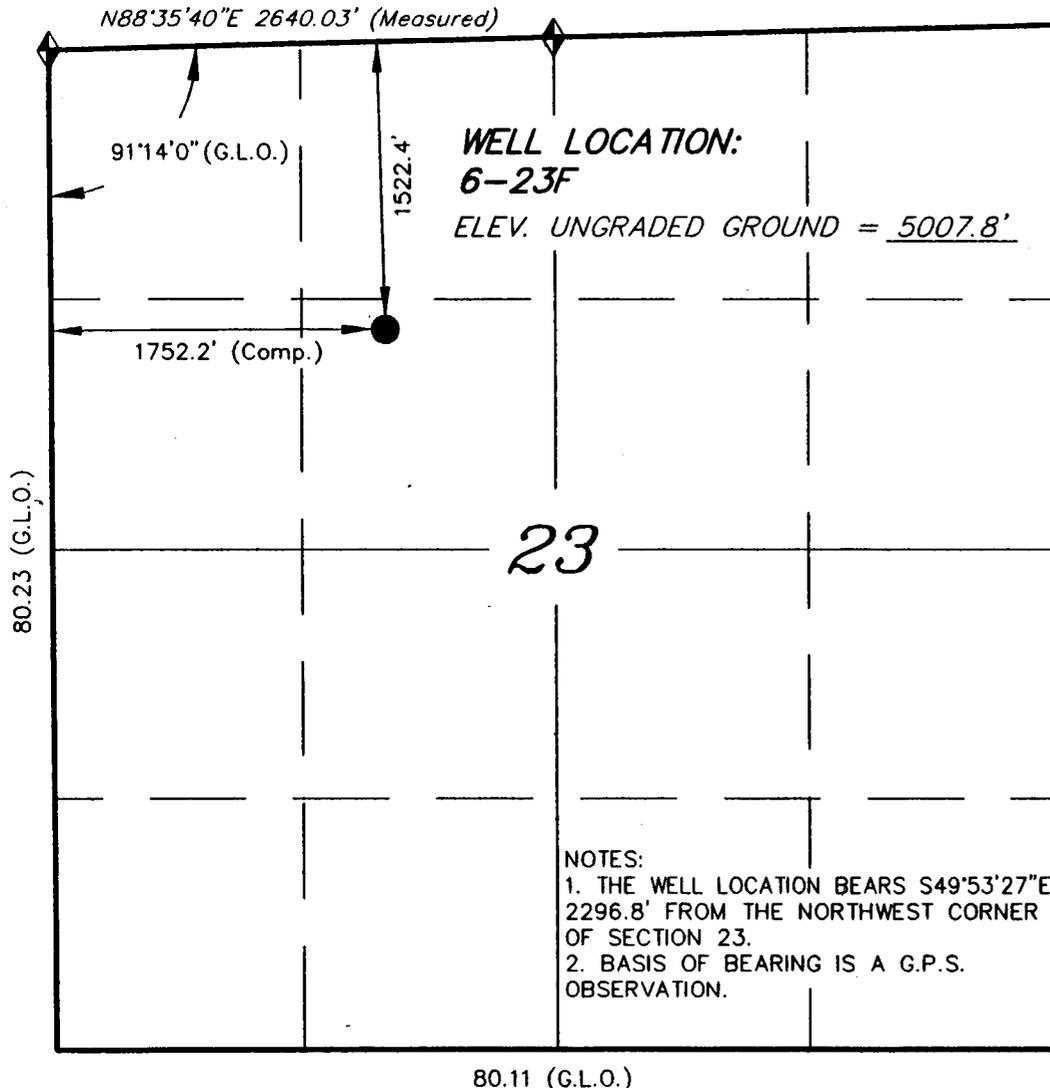


CONFIDENTIAL



NOTES:
1. THE WELL LOCATION BEARS S49°53'27"E 2296.8' FROM THE NORTHWEST CORNER OF SECTION 23.
2. BASIS OF BEARING IS A G.P.S. OBSERVATION.

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

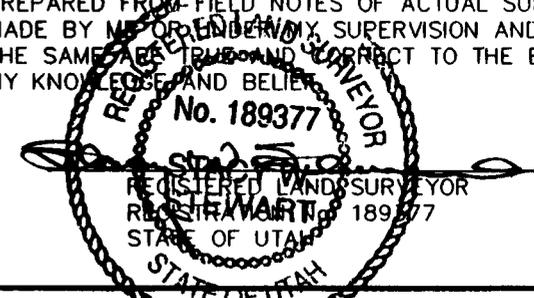

TRI STATE LAND SURVEYING & CONSULTING

38 WEST 100 NORTH - VERNAL, UTAH 84078
(801) 781-2501

SCALE: 1" = 1000'	SURVEYED BY: DS BG
DATE: 11/25/97	WEATHER:
NOTES:	FILE # CNG6-23

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV; U.S.G.S. 7-1/2 min QUAD (BIG PACK MTN. NW)

CONFIDENTIAL

SELF-CERTIFICATION STATEMENT

Self-certification statement. Under the Federal regulation in effect as of June 15, 1988 designation of operator forms are no longer required when the operator is not the 100% record title holder. An operator is now required to submit a self-certification statement to the appropriate Bureau office stating that said operator has the right to operate upon the leasehold premises. Said notification may be in the following format:

"Please be advised that CNG Producing Company is considered to be the operator of Well No. 6-23F SE 1/4 of NW 1/4 Section 23, Township 10S, Range 20E; Lease U-013793-A; Uintah County, Utah; and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by American Casualty Company of Reading, PA, Bond #524 7050.

Susan Sachitana for DL
David L. Linger
Onshore Drilling Manager

CONFIDENTIAL

DRILLING PLAN APPROVAL OF OPERATIONS

March 27, 1998

Attachment for Permit to Drill

Name of Operator: CNG PRODUCING COMPANY
Address: CNG TOWER - 1450 POYDRAS STREET
NEW ORLEANS, LA 70112-6000

WELL LOCATION: Well No. 6-23F

Uintah, Utah

1. GEOLOGIC SURFACE FORMATION

Uintah

2. ESTIMATE IMPORTANT GEOLOGIC MARKERS

<u>Formation</u>	<u>Depth</u>
Wasatch Tongue	3,865'
Green River Tongue	4,215'
Wasatch	4,340'
Chapita Wells	5,065'
Uteland Buttes	6,050'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS

<u>Formation</u>	<u>Depth (MD/ TVD)</u>	<u>Remarks</u>
Wasatch Tongue	3,865'	Oil Zone
Green River Tongue	4,215'	Oil Zone
Wasatch	4,340'	Gas Zone
Chapita Wells	5,065'	Gas Zone
Uteland Buttes	6,050'	Gas Zone

4. PROPOSED CASING PROGRAM

All casing used to drill this well will be new casing.
8-5/8", 24#/ft, K-55, 0'-350' - Cemented to Surface
5 1/2", 17#/ft, N-80, 0'- 6960' - Cemented to Surface

5. OPERATOR'S MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL

BOP stack has a 3000 psi working pressure. BOP will be pressure tested to 3,000 psi before drilling casing cement plug. Pipe rams will be operated daily and blind rams as possible.

6. The well is to be drilled with a KCL mud system maintaining a weight of approximately 9 - 9.7#/gal.

7. An automatic ignitor will not be installed on the blooie line.

CONFIDENTIAL

8. A 90° bend on the blooie line, located approximately 50' from the wellhead on the pit side past the mud tank will be installed. Total length of the blooie line will remain 100' from the wellhead.

9. **AUXILIARY EQUIPMENT TO BE USED**

1. Kelly Cock.
2. Full opening valve on floor with DP connection for use when Kelly is not in string.

10. **TESTING, LOGGING, AND CORING PROGRAMS TO BE FOLLOWED**

Possible DST in Wasatch Tongue. The logging program will include Dual Lateral/GR log TD to Surface, Density/Neutron - TD - 3,500' possible dipmeter and rotary cores over selected intervals.

11. **ANTICIPATED ABNORMAL PRESSURES OR TEMPERATURES EXPECTED**

No normal pressures are anticipated nor is the area known for abnormal temperatures. The formations to be penetrated do not contain H₂S gas. The anticipated bottom hole pressure is 2,610 PSI.

12. **WATER SUPPLY**

- A. Water to be used for drilling will be hauled Section 32-T6S-R20E. User's Claim - Code #43, Serial #9077.
- B. No pipelines are anticipated. Hauling will be on the road(s) shown in Attachment No. 3.
- C. No water well is anticipated to be drilled at this time.

13. **CEMENT SYSTEMS**

SURFACE

+/-225 sks Class "G" cement, 2% CaCl₂, and .25#/sk flake. Mixed at 15.8 ppg. Yield 1.16 ft³/sk, water 4.96 gal/sk, excess 50%

PRODUCTION

Lead Slurry - +/-350 sk Hi-Lift, 3% Salt, 10#/sk silsonite, .25#/sk Celloflake.

Tail Slurry - +/-770 sk Class G, 10% gypsum, 3% Salt, .2% retarder

14. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS**

Starting Date: June 15, 1998
Duration: 20 Days

CONFIDENTIAL

SURFACE CASING CEMENT PROGRAM

Set 8 5/8" casing in 12 1/4" open hole cement to surface. Volume calculated using 75% excess.

SPACER:

Pump 20 bbls lightly gelled water followed by 5 bbls fresh H₂O ahead of cement to water wet the well bore after air drilling. Displace with fresh water.

CEMENT SYSTEM

± 224 SKS Class G "Tail-In" Cement, 2% CaCl₂, . 25#/sk Celloflake.

Weight	15.80 lb/gal
Yield	1.16 ft ³ /sk
Water	4.96 gal/sk
Thickening Time at 118°	1:42 minutes
Compressive Strength at 80°	8 hrs 750 PSI 16 hrs 1800 PSI 24 hrs 2400 PSI

CASING HARDWARE:

- 1 Cement Guide Shoe
- 1 Insert Float
- 3 Centralizers
- 1 Stop Ring
- 1 Thread Lock
- 1 Top Wood Plug

CONFIDENTIAL

LONGSTRING CEMENT

Set 5 1/2" casing in a 7 7/8" open hole.
Lease cement slurry to fill from 750' above top pay zone to surface.
Tail cement slurry to fill from TD to 750' above the pay zone.
Both volumes are calculated using 25% excess.

SPACER:

(KCL Mud System) 10 bbl water

Displace with 3% KCL water using .2% L-55 Clay Stabilizer in the first 50 bbls of displacement.

CEMENT SYSTEMS

Lead Slurry

± 350 sks Hi-Lift, 3% Salt, 10#/sk silsonite, .25#/sk Celloflake.

Weight	10.80 lb/gal
Yield	3.91 ft ³ /sk
Water	24.40 gal/sk

Thickening Time at 180°	4 hrs +
Compressive Strengths in 24 hrs	375 PSI
Fluid Loss	240 cc/30 minutes


Tail Slurry

± 700 sks Class G, 10% gypsum, 3% Salt, .2% retarder


Weight	14.20 lb/gal
Yield	1.61 ft ³ /sk
Water	7.91 gal/sk

Thickening Time at 165° BHCT	
Compressive Strength in 12 hrs	845 PSI
24 hrs	1470 PSI

CONFIDENTIAL
BOP STACK

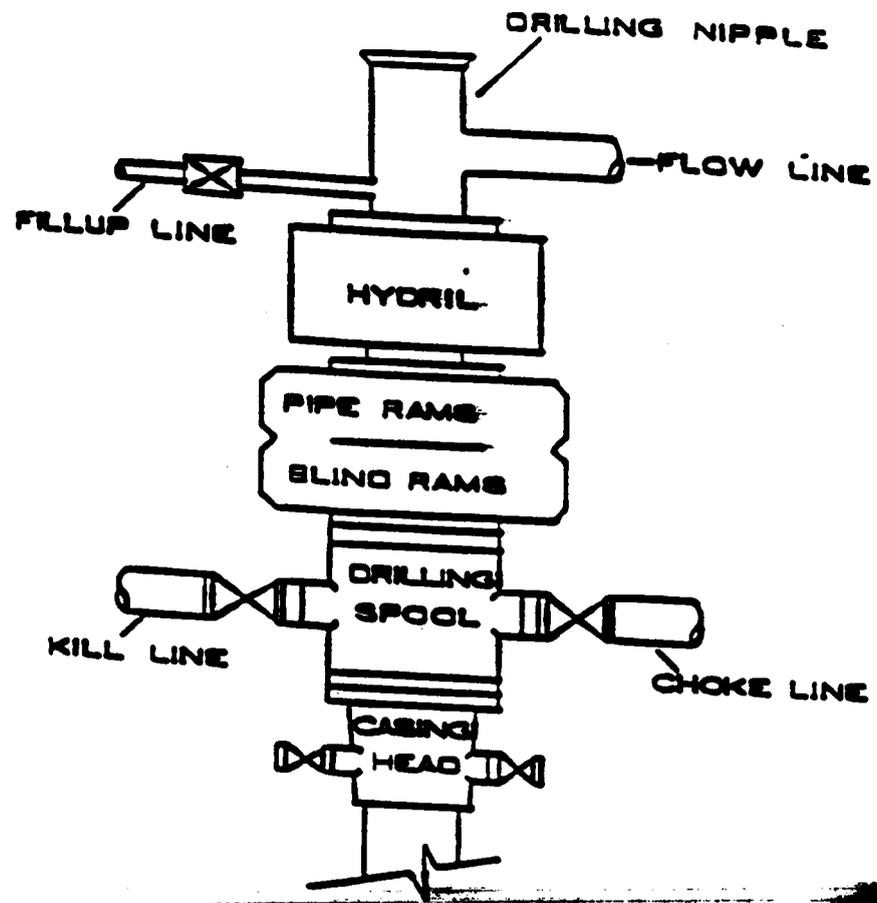

CHOKER MANIFOLD

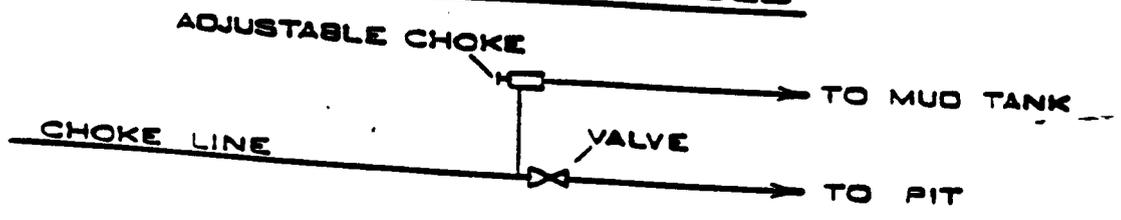

CONFIDENTIAL

Date NOS Received: _____

**CONDITIONS OF APPROVAL
FOR THE SURFACE USE PROGRAM OF THE
APPLICATION FOR PERMIT TO DRILL**

Company/Operator: CNG Producing Company

Well Name & Number: RBU 6-23F

Lease Number: U-013793-A

Location: SE NW Sec. 23 T. 10S R. 20E

Surface Ownership: Bureau of Land Management

NOTIFICATION REQUIREMENTS

- Location Construction - forty-eight (48) hours prior to construction of location and access roads.
- Location Completion - prior to moving on the drilling rig.
- Spud Notice - at least twenty-four (24) hours prior to spudding the well.
- Casing String and Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.
- BOP and Related Tests - twenty-four (24) hours prior to initiating pressure Equipment tests.
- First Production Notice - within five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

B. **THIRTEEN POINT SURFACE USE PROGRAM:**

CONFIDENTIAL

Multipoint Requirement to Accompany APD

1. **Existing Roads** - describe the following and provide a legible map, labeled and showing:
 - a. Proposed wellsite as staked and access route to location, including distances from point where access route exists establish roads. (Actual staking should include tow directional reference stakes.) The proposed well site is located approximately 44 miles southwest of Vernal, Utah.
 - b. Route and distance from nearest town or locatable reference point, such as a highway or county road, to where well access route leaves main road. - From Vernal proceed West on Highway 40 about 17 miles to Highway 88. Turn left on Highway 88 and proceed South about 16 miles to Ouray. Continue South on Sea Ridge Road about 12.6 miles and turn right. Go 1.3 miles to access orad on left.
 - c. Access road(s) to location color-coded or labeled. (See Topographic Map A & B for details.)
 - d. Plans for improvement and/or maintenance of existing roads. (Appropriate rights-of-way for off lease roads should be attached.)
2. **Planned Access Roads**—describe the following and provide a map of suitable scale indicating all necessary access roads (permanent and temporary) to be constructed or reconstructed, showing:
 - a. Length - 800'
 - b. Width - 30 foot right-of-way with 18 foot running surface maximum.
 - c. Maximum grades - 8%
 - d. Turnouts - None
 - e. Drainage design - Spill pond southeast of location
 - f. Location and size of culverts and/or bridges, and brief description of any major cuts and fills - None
 - g. Surfacing material (source) - Native
 - h. Necessary gates, cattleguards, or fence cuts and/or modification to existing facilities - None

(New or reconstructed roads are to be centerline-flagged at time of location staking.)

All travel will be confined to existing access road rights-of-way.

Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development, (1989).

The road shall be constructed/upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Construction/upgrading shall include ditching, draining, graveling, crowning, and capping the roadbed as necessary to provide a well constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot right-of-way will not be allowed. Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

__ Right-of-Way Application needed.

__ The operator/lessee or his/her successor shall be responsible for all maintenance on cattleguards or gates associated with this oil and/or gas operation.

3. Location of Existing Wells - describe the following and provide a map or plat of all wells within a 1 mile radius of the proposed well location showing and identifying existing:

- a. Water wells - None
- b. Abandoned wells - None
- c. Temporarily abandoned wells - None
- d. Disposal wells - None
- e. Drilling wells - None
- f. Producing wells - RBU 9-14F, RBU 5-14F, RBU 11-14F, RBU 15-14F, RBU 13-14F, RBU 2-23F, RBU 4-23F, RBU 15-23F, RBU 13-23F, RBU 10-22F, RBU 7-22F
- g. Shut-in wells - None
- h. Injection wells - None

4. Location of Existing and/or Proposed Facilities

a. On well pad: Show the following existing area facilities and dimensions to be utilized if the well is successfully completed for production (detail painting plans and color if applicable):

- (1) Tank batteries
- (2) Production facilities
- (3) Oil gathering lines
- (4) Gas gathering lines
- (5) Injection lines
- (6) Disposal lines
- (7) Surface pits - After the well is hydraulically fraced, the well will be flowed back into the surface pits. After first production, a 300 bbl tank will be installed to contain produced waste water. Plans are to run a 2" line from the separator to the 300 bbl tank.

(Indicate if any of the above lines are buried.)

b. Off well pad: Same as above. Off lease flowlines may require rights-of-way or special use permits, check with the District Office Realty Specialist. (Include a diagram of the proposed attendant lines, i.e., flowlines, powerlines, etc., if off well pad location.)

- (1) Proposed location and attendant lines shall be flagged off of well pad prior to archaeological clearance.
- (2) Dimensions of facilities
- (3) Construction methods and materials
- (4) Protective measures and devices to protect livestock and wildlife

Note: Operator has option of submitting information under 4A and B, after well is completed for production, by applying for approval of subsequent operations.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire content of the largest tank within the facility/battery, unless more stringent protective requirements are deemed necessary by the authorized officer.

Tank batteries will be placed on the _____

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match on of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

The required paint color is Desert Brown

If at any time the facilities located on public land and authorized by the terms of the lease are no longer included in the lease (due to a contraction in the unit or other lease or unit boundary change), BLM will process a change in authorization to the appropriate statute. The authorization will be subject to appropriate rental or other financial obligation as determined by the authorized officer.

5. Location and Type of Water Supply

- a. Show location and type of water supply, either by 1/4, 1/4 section on a map or by written description Sec 32-T6S-R20E No. 43-9077
- b. State method of transporting water, and show any roads or pipelines needed.
- c. If water well is to be drilled on lease, so state. _____
*The operator will be responsible for acquiring the necessary permit to obtain water to be used for drilling activities.

6. Source of Construction Materials

- a. Show information either on map or by written description - Surface and subsoil materials in the immediate area will be utilized to build the location

The reserve pit shall be lined with a 12 mil pit liner only under the following conditions:

1. If we have to blast the pit, or
2. If the non-blasted pit will not hold fluid.

If these conditions do not exist, we will not line the pit.

If a plastic nylon reinforced liner is used, it will be a minimum of 12 mil in thickness.

After first production, produced waste water will be confined to a lined pit or storage tank for a period not to exceed ninety (90) days. During the 90 day period, in accordance with NTL-2B, an application for approval of a permanent disposal method and location, along with required water analysis, shall be submitted for the AO's approval. Failure to file an application within the time allowed will be considered an incident of noncompliance.

8. Ancillary Facilities

Camp facilities or airstrips will not be allowed unless otherwise approved.

9. Well Site Layout—provide a plat (not less than 1" = 50') showing:

- a. Cross-sections of proposed drill pad with approximate cuts and fills and the relation to topography.
- b. Location of mud tanks, reserve, and flare pits, pipe racks, living facilities, and soil material stockpiles, etc. (Approval as used in this section means field approval of location.)
- c. Rig orientation, parking ares, and access roads, etc.

The reserve pit will be located on the: West

The flare pit will be located downwind of the prevailing wind direction on the stake #5 by the reserve pit a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled topsoil (first four inches) will be stored on the: stake #8 & #6

Access to the well pad will be from the: Stake #3

Diversion ditch(es) shall be constructed on the _____ side of the location (above / below) the cut slope, draining to the _____.

Soil compacted earthen berm(s) shall be placed on the _____ side(s) of the location between the _____.

The drainage(s) shall be diverted around the West side (Stake #8 & #2) side(s) of the well pad location.

The reserve pit and/or pad location shall be constructed long and narrow for topographic reasons _____.

The north corner of the well pad will be rounded off to avoid the hill _____.

Fencing Requirements

CONFIDENTIAL

All pits will be fenced according to the following minimum standards:

- a. 39-inch net wire shall be used with at least one stand of barbed wire on top of the net wire (barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- b. The net wire shall be no more than 2-inches above the ground. The barbed wire shall be 3-inches above the net wire. Total height of the fence shall be at least 42-inches.
- c. Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.
- d. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- e. All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is to be regularly travelled. If the well is a producer, the cattleguard (shall/shall not) be permanently mounted on concrete bases. Prior to a new road, crossing any fence located on federal land, or any fence between federal land and private land, the operator will contact the BLM, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

10. Plans for Restoration of Surface

a. Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with 43 CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 6 months from the date of well completion. Before any dirt work takes place, the reserve pit must be completely dry and all cans, barrels, pipe, etc., will be removed.

Contact appropriate surface management agency for required seed mixture.

CONFIDENTIAL

b. **Dry Hole/Abandoned Location**

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and BLM will attach the appropriate surface rehabilitation conditions of approval.

11. **Surface Ownership:**

Access Road: Bureau of Land Management Location: Bureau of Land Management

"If the access road and/or location involves private or state agency owned surface, a copy of the surface owners agreement is required prior to approval of the APD."

12. **Other Additional Information**

- a. The Operator is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator is to immediately stop work that might further disturb such materials, and contact the authorized officer (AO). Within five working days the AO will inform the operator as to :

-whether the materials appear eligible for the National Register of Historic Places;

-the mitigation measures the operator will likely have to undertake before the site can be used (assuming in situ preservation is not necessary); and

-a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wishes, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials may be required. Otherwise, the operator will be responsible to mitigation costs. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

- b. The operator will control noxious weeds along right-of-way for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds may be obtained from the BLM, or the appropriate County Extension Office. On BLM administered land it is required that a Pesticide Use Proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.
- c. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on Federal Lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

CONFIDENTIAL

Additional Surface Stipulations

- No construction or drilling activities shall be conducted between May 15 and June 20 because of antelope breeding season
- No surface occupancy will be allowed within 1,000 feet of any sage grouse strutting ground.
- No construction or exploration activities are permitted within 1.5 mile radius of sage grouse strutting grounds from April 1 to June 30.
- There shall be no surface disturbance within 600 feet of live water (includes stock tanks, springs, and guzzlers).
- No cottonwood trees will be removed or damaged.
- A silt catchment dam and basin will be constructed according to BLM specifications, where flagged.
- _____
- _____
- _____

13. Lessee's or Operators Representative and Certification

Representative

Name: _____

Address: _____

Phone No: _____

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved plan of operations, and any applicable Notice to Lessees. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

A complete copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.

The operator or his/her contractor shall contact the BLM Office at (801) 789-1362 forty-eight (48) hours prior to construction activities.

The BLM Office shall be notified upon site completion prior to moving on the drilling rig.

CONFIDENTIAL

Certification:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and, that the work associated with the operations proposed here will be performed by CNG Producing Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

March 27, 1998 Susan Sachidanandam David L. Linger, Onshore Drilling Manager
Date Name and Title

Onsite Date: March 19, 1998



Participants on Joint Inspection

<u>Greg Darlington</u>	<u>Bureau of Land Management</u>
<u>Tony Pummel</u>	<u>Stubbs Construction</u>
<u>Mitch Hall</u>	<u>CNG Producing Company</u>
<u> </u>	<u> </u>

CNG PRODUCING CO.

6-23F
SEC. 23, R20E, T10S, S.L.B.&M.

Proposed Access Road

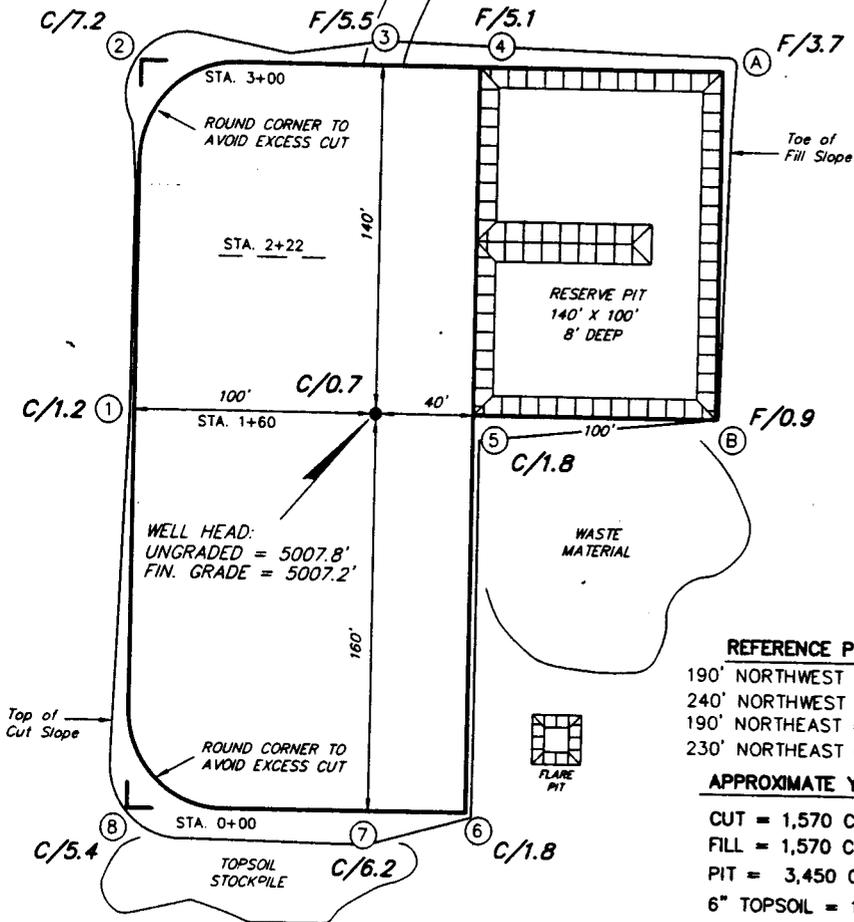


WELL HEAD:
UNGRADED = 5007.8'
FIN. GRADE = 5007.2'



FLARE PIT

- REFERENCE POINTS**
- 190' NORTHWEST = 5005.8'
 - 240' NORTHWEST = 5022.0'
 - 190' NORTHEAST = 5013.5'
 - 230' NORTHEAST = 5027.4'


- APPROXIMATE YARDAGES**
- CUT = 1,570 Cu. Yds.
 - FILL = 1,570 Cu. Yds.
 - PIT = 3,450 Cu. Yds.
 - 6" TOPSOIL = 1,040 Cu. Yds.

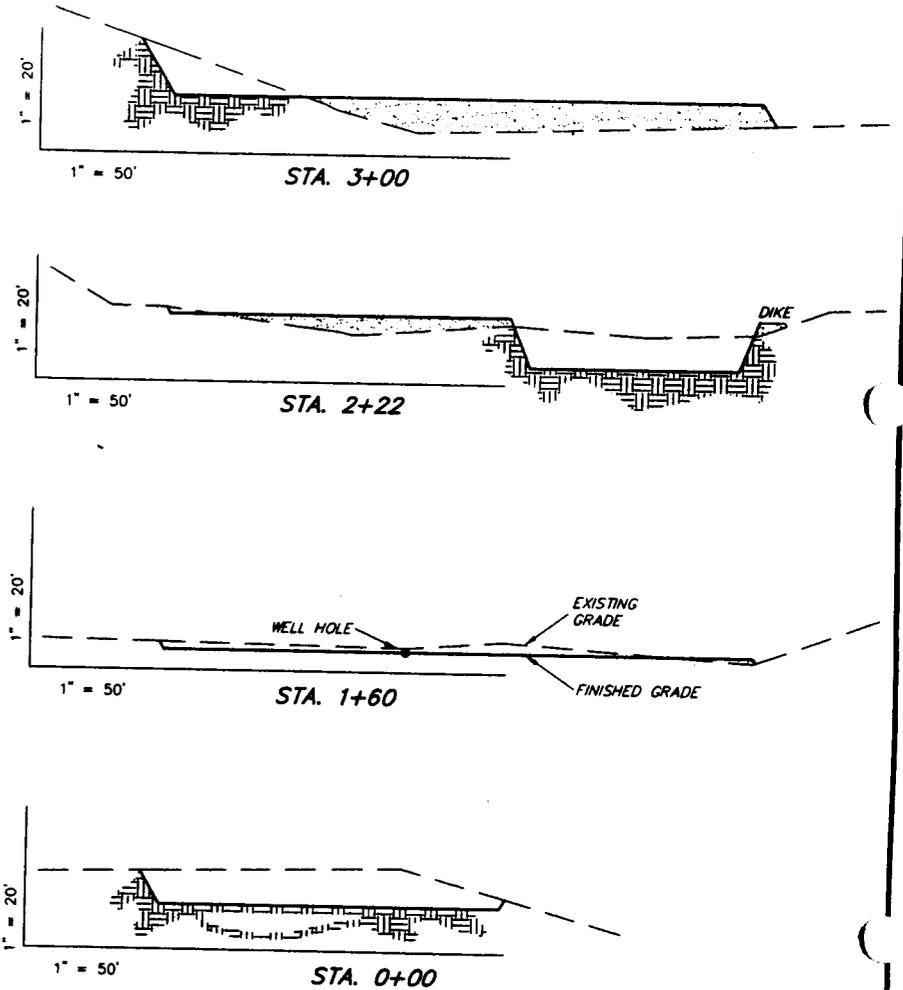


SURVEYED BY:	DS BG
DRAWN BY:	BRW
DATE:	12/01/97
SCALE:	1" = 50'
FILE:	CNG6-23

Tri State
Land Surveying, Inc.
(801) 781-2501
38 WEST 100 NORTH VERNAL, UTAH 84078

PLAT #2
RIG LAYOUT
6-23F

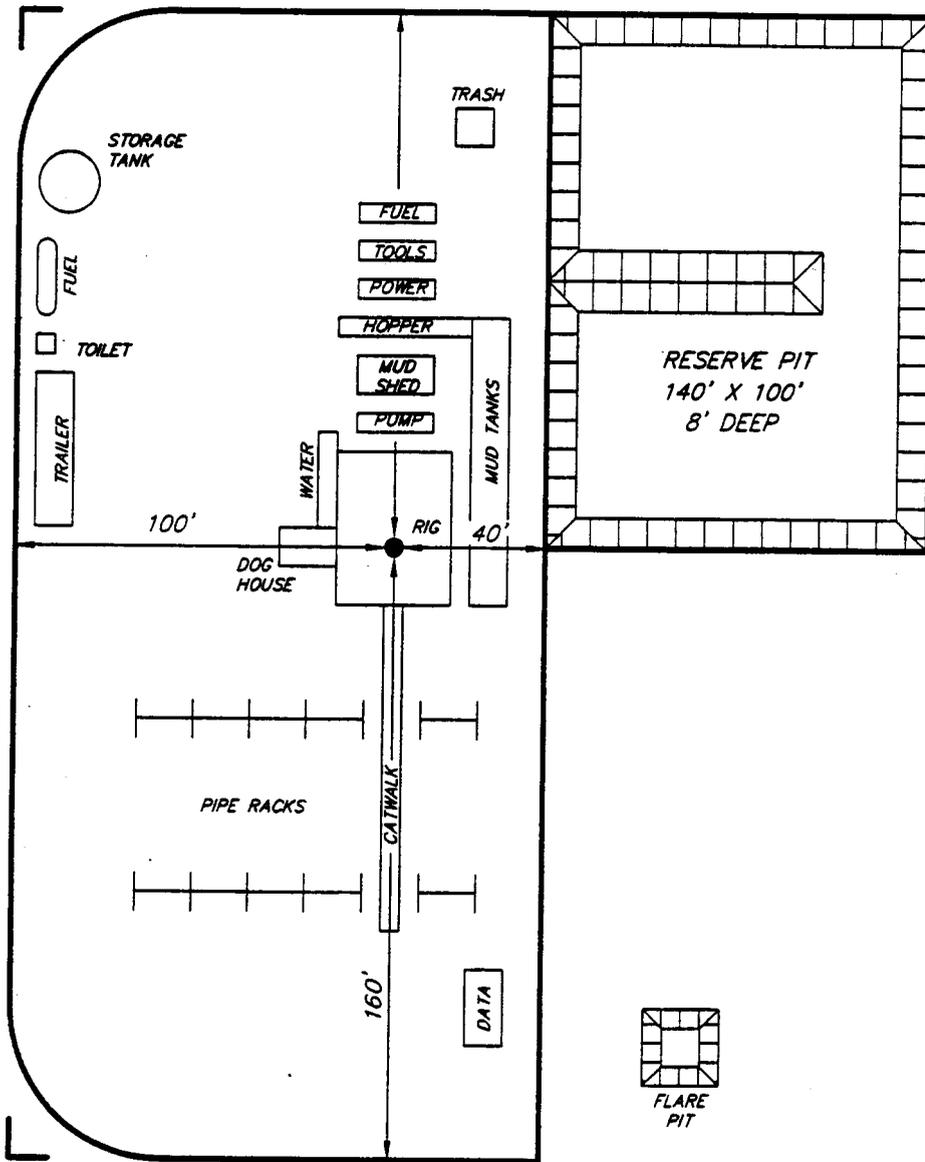

Tri State
Land Surveying, Inc.
(801) 781-2501
38 WEST 100 NORTH, VERNAL, UTAH 84078

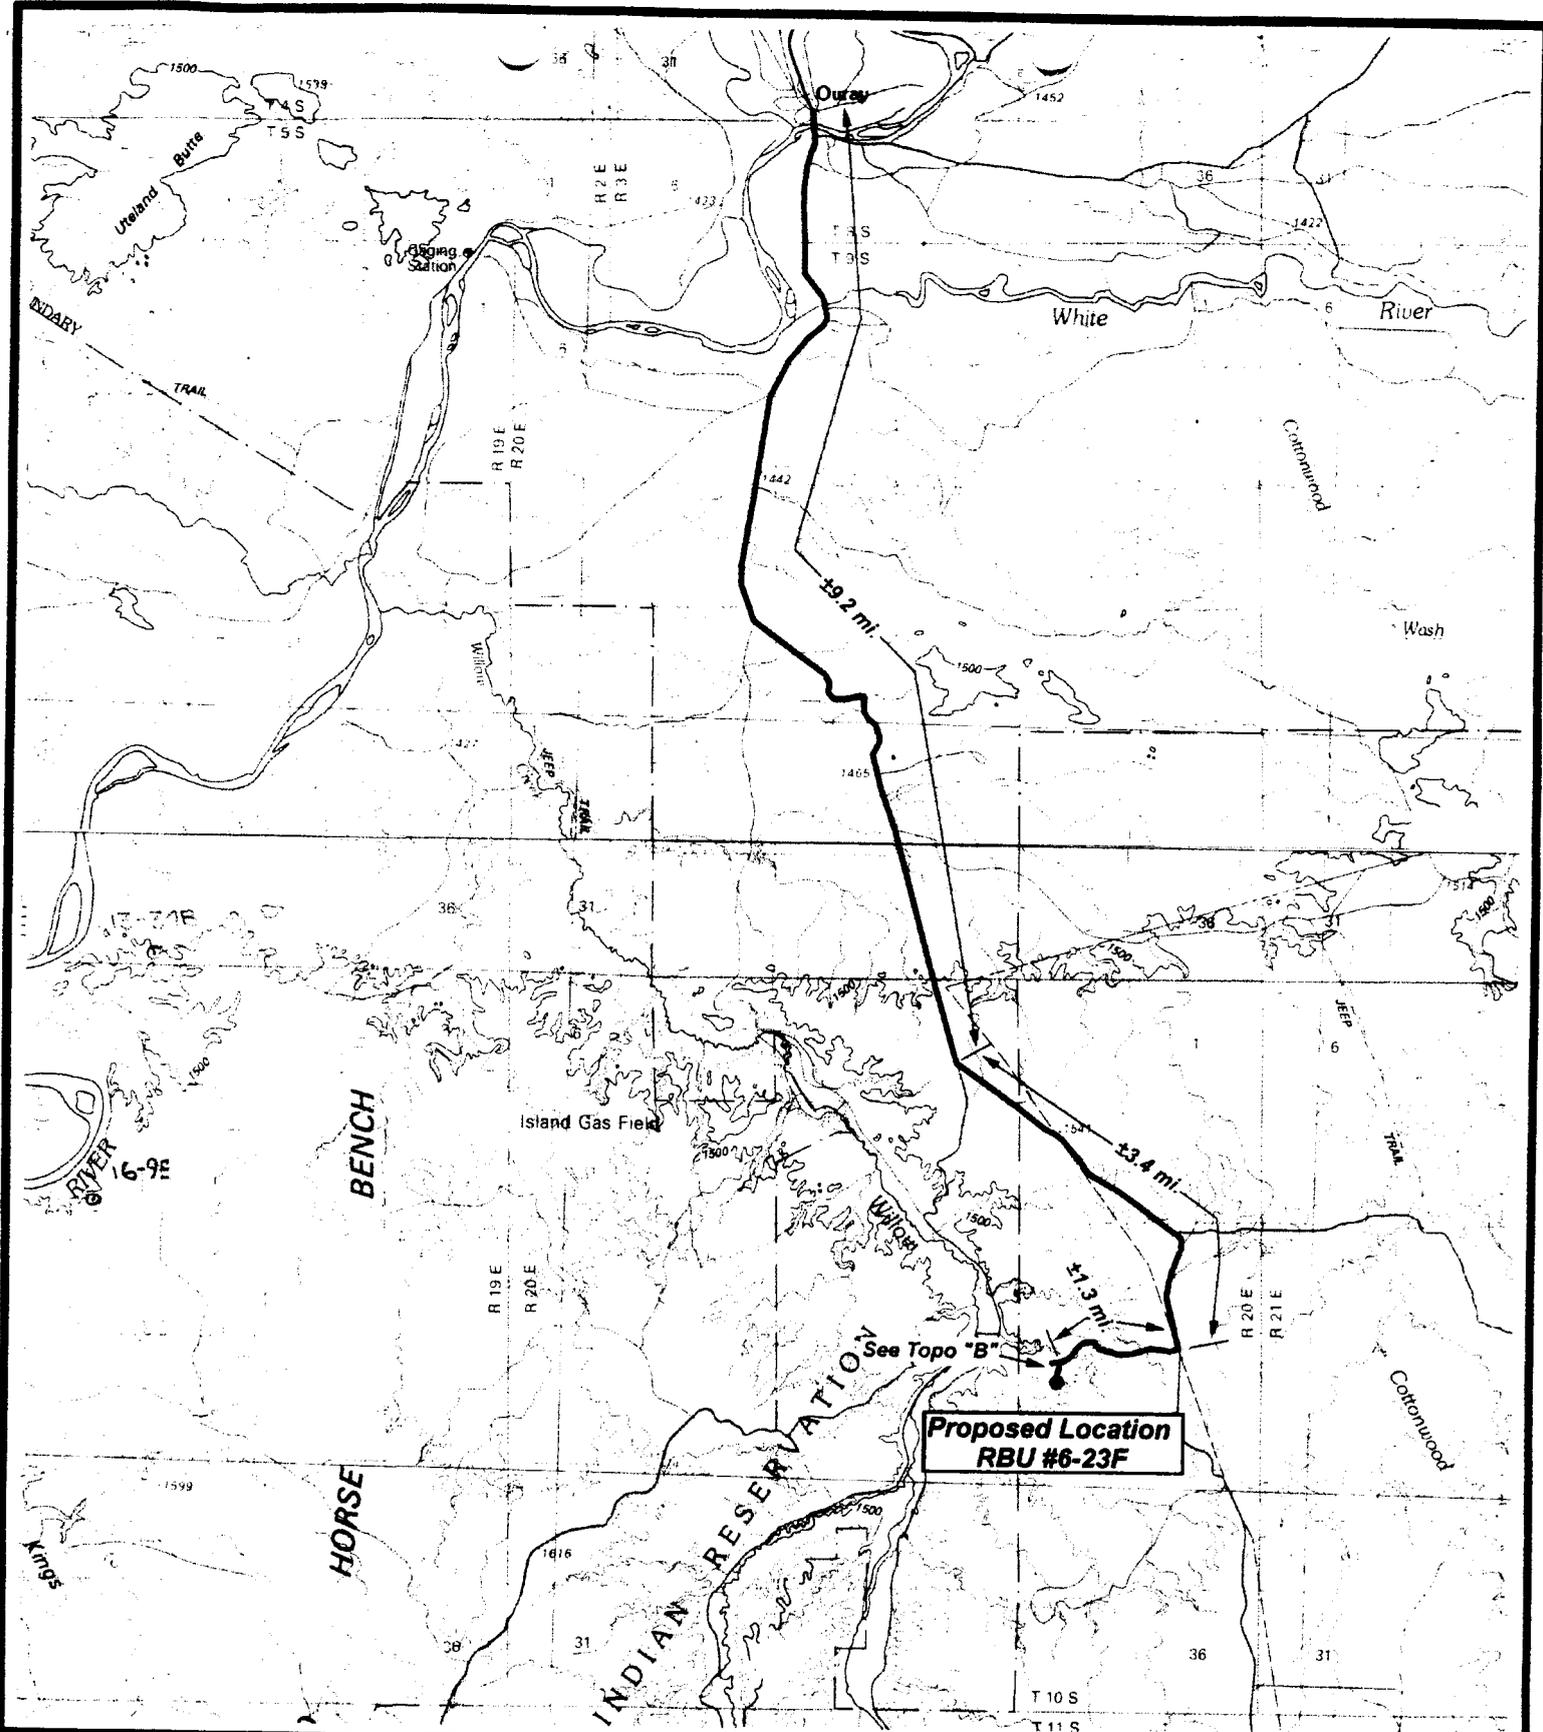



**CNG Producing
Company**

A **CNG** COMPANY


RBU #6-23F

SEC. 23, T10S, R20E, S.L.B.&M.

TOPO "A"



38 WEST 100 NORTH VERNAL, UTAH 84078

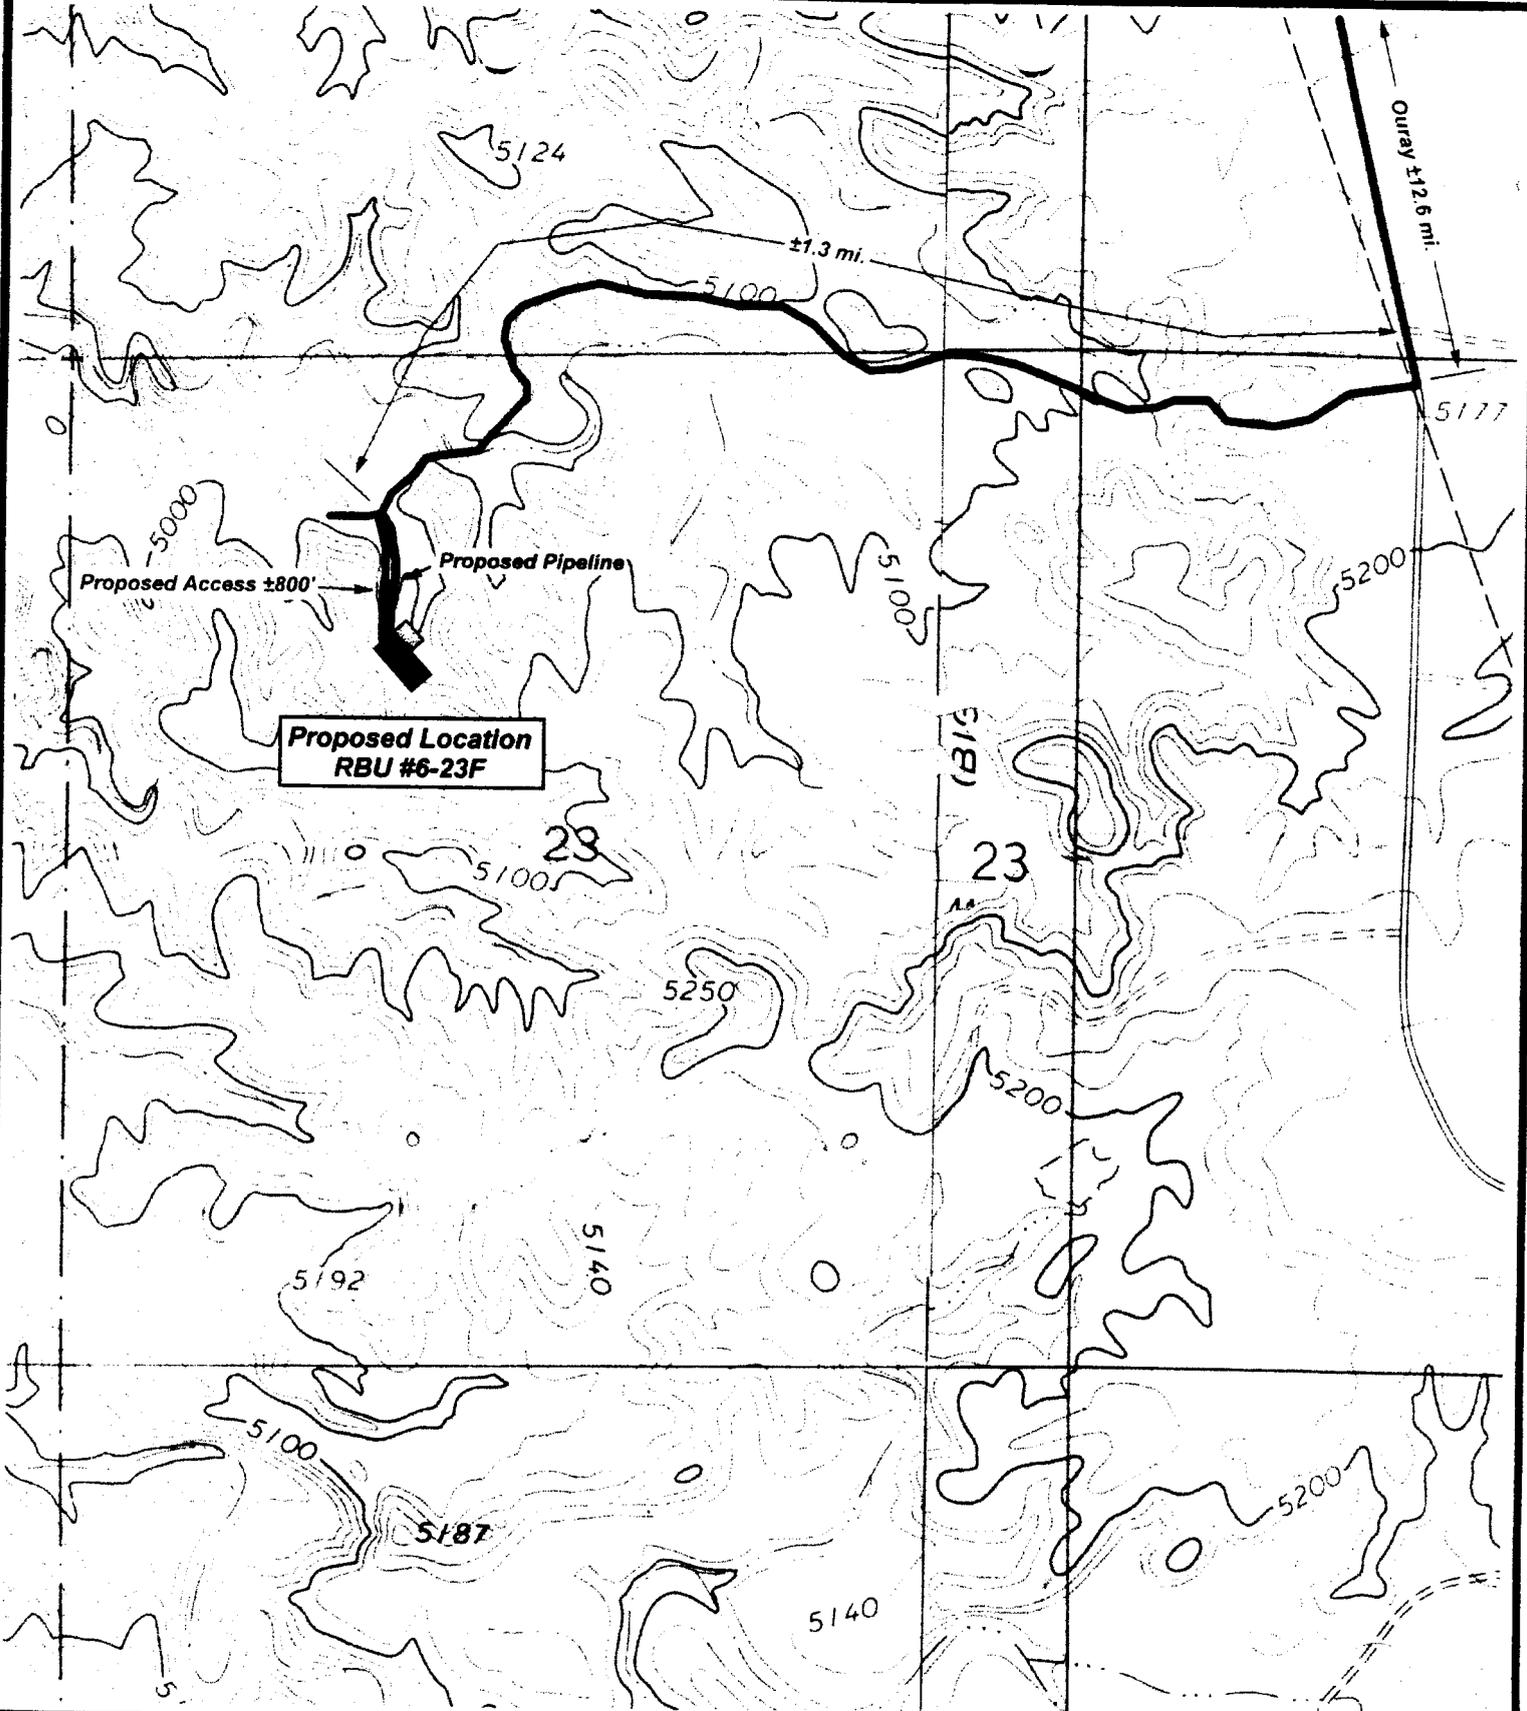

**CNG Producing
Company**

A **CNG** COMPANY
RBU #6-23F

SEC. 23, T10S, R20E, S.L.B.&M.
TOPO "B"




Scale 1" = 1000'

*7th State
Land Surveyors Inc.*
(801) 781-2501
38 WEST 100 NORTH VERNAL, UTAH 84078



LEGEND

- = Oil Line
- G = Gas Line
- W = Water Line
- R = Relief Line (Pressure)
- C = Condensate Line
- V = Vent Line
- D = Drain Line
- M = Gas Meter
- P = Pump
- BP = Back Pressure Valve
- SWS = Sealed When Shipping
- SUS = Sealed Unless Shipping
- T = Heat Traced Line
- H = Heater
- BL = Buried Line
- ⊗ = Valve
- ↗ = Check Valve
- SC = Sealed Closed Valve
- NC = Normally Closed
- BD = Blowdown Line

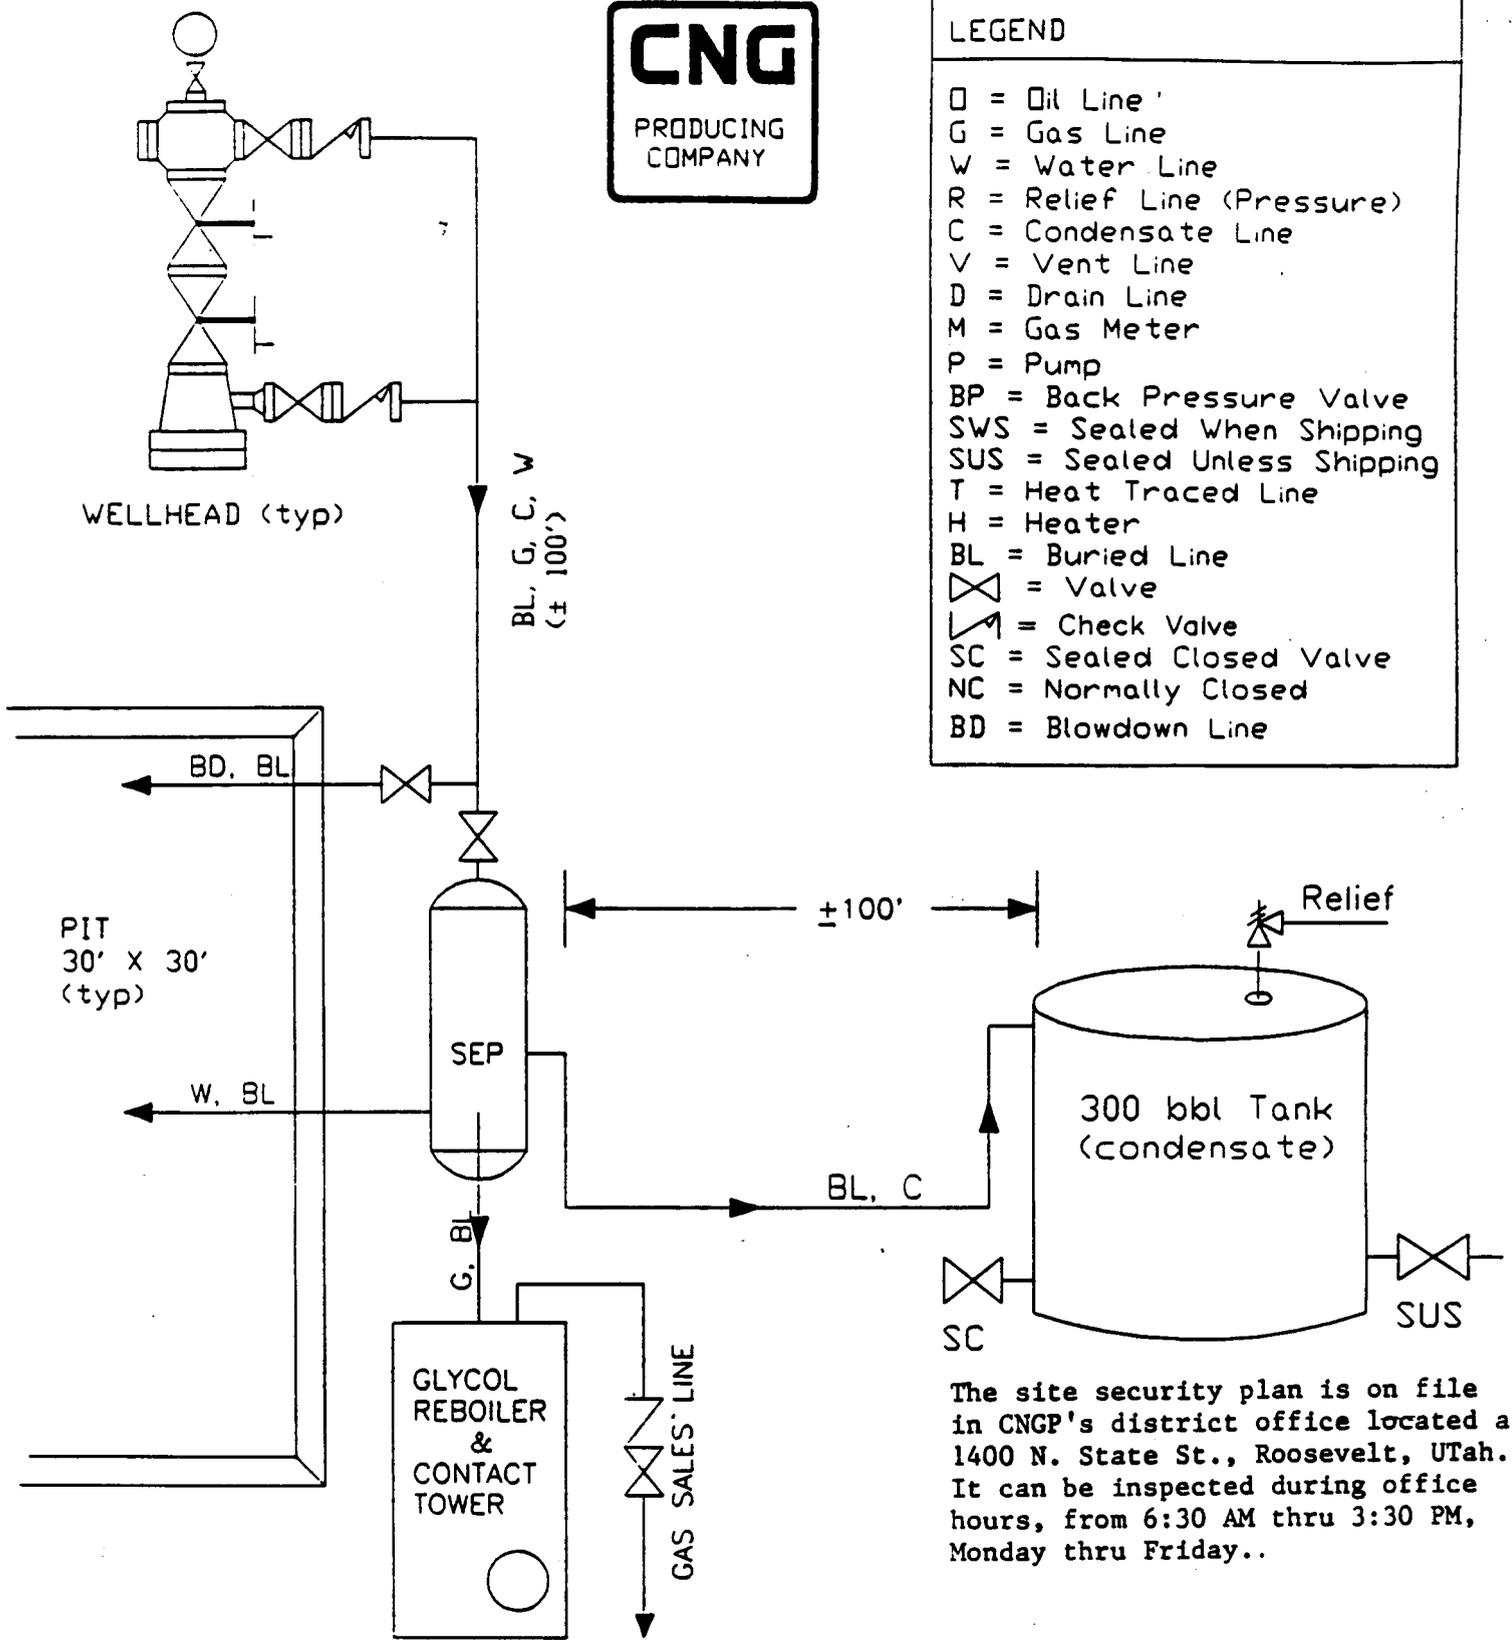

The site security plan is on file in CNGP's district office located at 1400 N. State St., Roosevelt, UTah. It can be inspected during office hours, from 6:30 AM thru 3:30 PM, Monday thru Friday..

CNG PRODUCING COMPANY

Well: RBU 6-23F

RIVER BEND FIELD, UINTA COUNTY

not to scale

SOP, RBU FLOW 1 SEP

TYPICAL FLOW DIAGRAM

date: 3/30/98


**CNG PRODUCING COMPANY
RIVER BEND UNIT
UNTAH COUNTY, UTAH
PARTICIPATING AREAS LAND PLAT**

LEGEND

- ▬▬▬ INDIAN RESERVATION BOUNDARY
- ▬▬▬ PARTICIPATING AREAS A & B

FILE UTWBLP.1007, FILE-UTAWD, REL.UTWBLP.1007, SCALE 1" = 4000'

UNTAH & OURAY INDIAN RESER

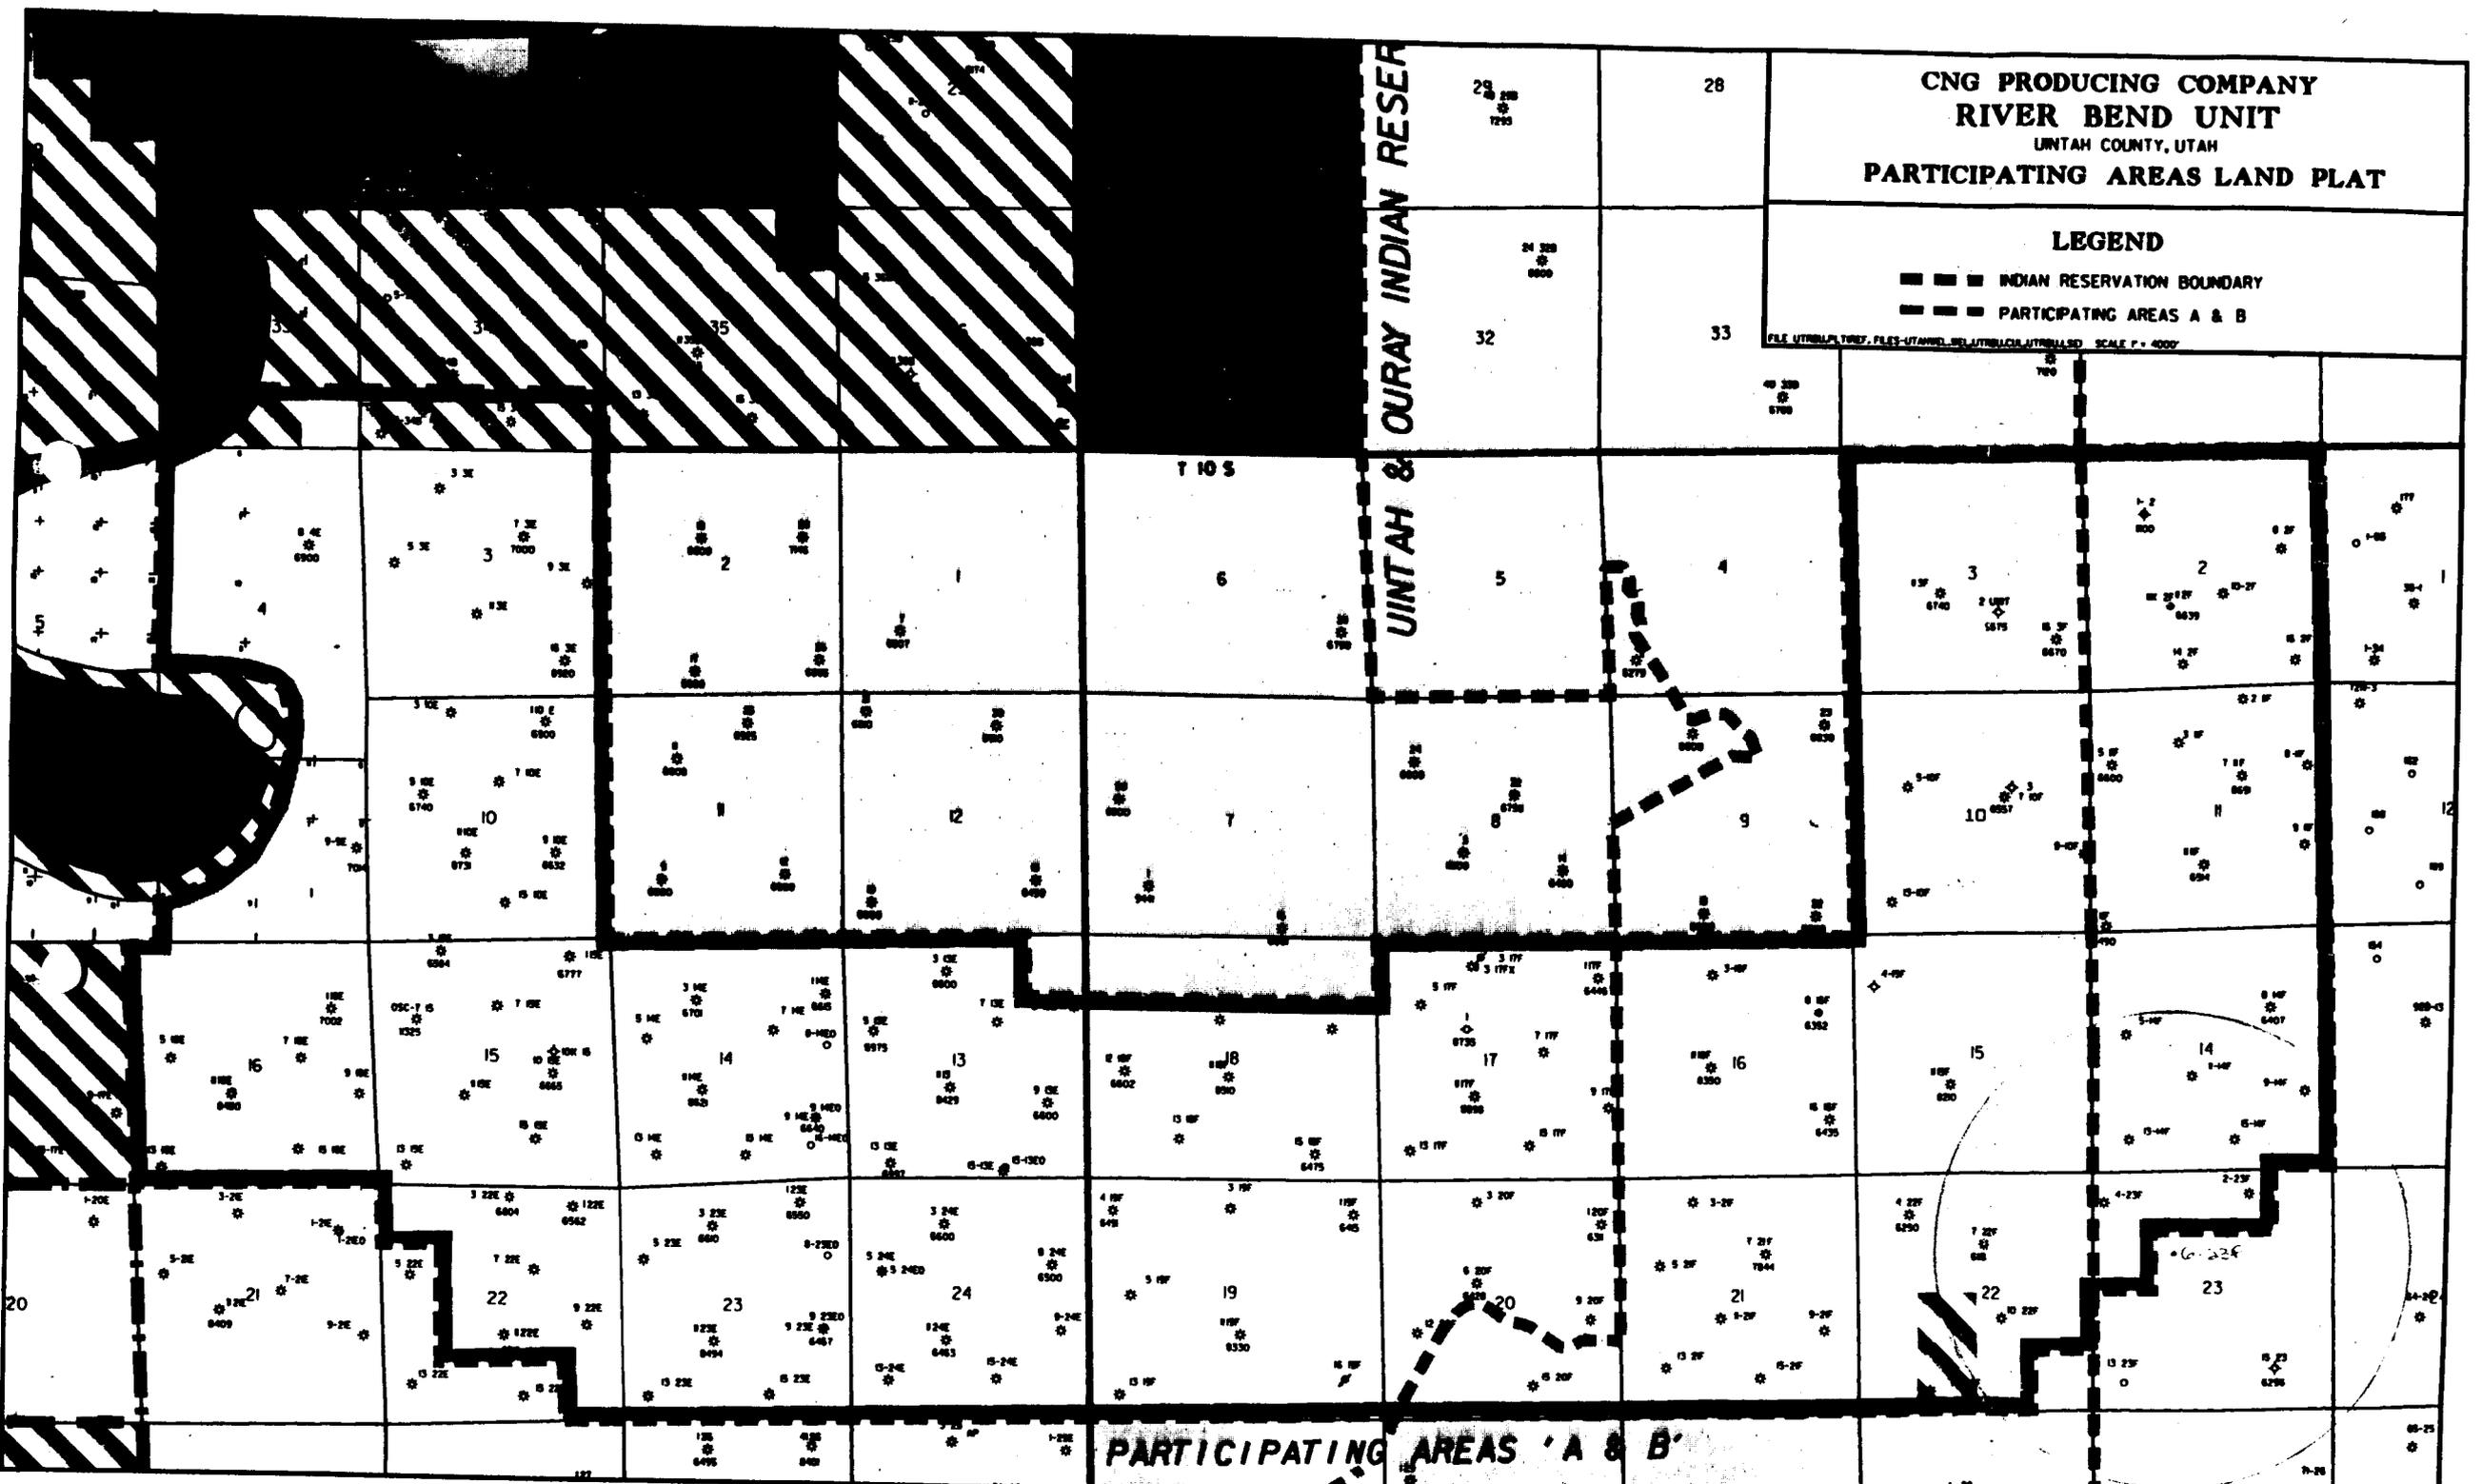

PARTICIPATING AREAS 'A & B'

**CNG Producing
Company**

A **CNG** COMPANY

CNG Tower
1450 Poydras Street
New Orleans, LA 70112-6000
(504) 593-7000

March 30, 1998

**Mr. Wayne Bankart
U.S. Dept. of the Interior
Bureau of Land Management
Vernal District Office
170 South 500 East
Vernal, UT 84078**

**RE: Application for Permit to Drill
RBU 6-23F, Sec. 23-T10S-R20E**

Dear Wayne:

Enclosed please find an original and two copies of the above referenced Application for Permit to Drill for the above referenced well.

CNG Producing Company is requesting that all well information be held strictly confidential.


Should you have any questions please feel free to contact either myself at (504) 593-7260 or our project engineer, David Linger at (281) 873-1561.

Sincerely,

Susan H. Sachitana
Susan H. Sachitana
Regulatory Reports Administrator

Enclosure

cc: **Utah Board of Oil, Gas & Mining
David Linger
Nelda Decker
Mitch Hall (letter only)**



WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 03/31/98

API NO. ASSIGNED: 43-047-33087

WELL NAME: RBU 6-23F
 OPERATOR: CNG PRODUCING COMPANY (N0605)
 CONTACT: Superintendent (504) 593-7260

PROPOSED LOCATION:
 SENW 23 - T10S - R20E
 SURFACE: 1522-FNL-1752-FWL
 BOTTOM: 1522-FNL-1752-FWL
 UINTAH COUNTY
 NATURAL BUTTES FIELD (630)

INSPECT LOCATION BY: / /		
TECH REVIEW	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: FED
 LEASE NUMBER: U-013793-A
 SURFACE OWNER: BLM

PROPOSED FORMATION: WSTC

RECEIVED AND/OR REVIEWED:

Plat

Bond: Federal State Fee
 (No. 112211200)

Potash (Y/N)

Oil Shale (Y/N) *190-5(B)

Water Permit
 (No. Code # 9011)

RDCC Review (Y/N)
 (Date: _____)

NA St/Fee Surf Agreement (Y/N)

LOCATION AND SITING:

___ R649-2-3. Unit _____

___ R649-3-2. General

R649-3-3. Exception


___ Drilling Unit
 Board Cause No: _____
 Date: _____

COMMENTS: *Well hole 272 Unit 100, however, no logs will be drilled
*Apd Exception on 4-23-98 (Rec'd 4-23-98)

STIPULATIONS: ① CNG PRODUCING COMPANY HAS SUBMITTED THE REQUIRED INFORMATION AND ADMINISTRATIVE APPROVAL OF THE REQUESTED EXCEPTION LOCATION IS HEREBY GRANTED.
② FEDERAL APPROVAL

RIVERBEND UNIT

Uintah County, Utah

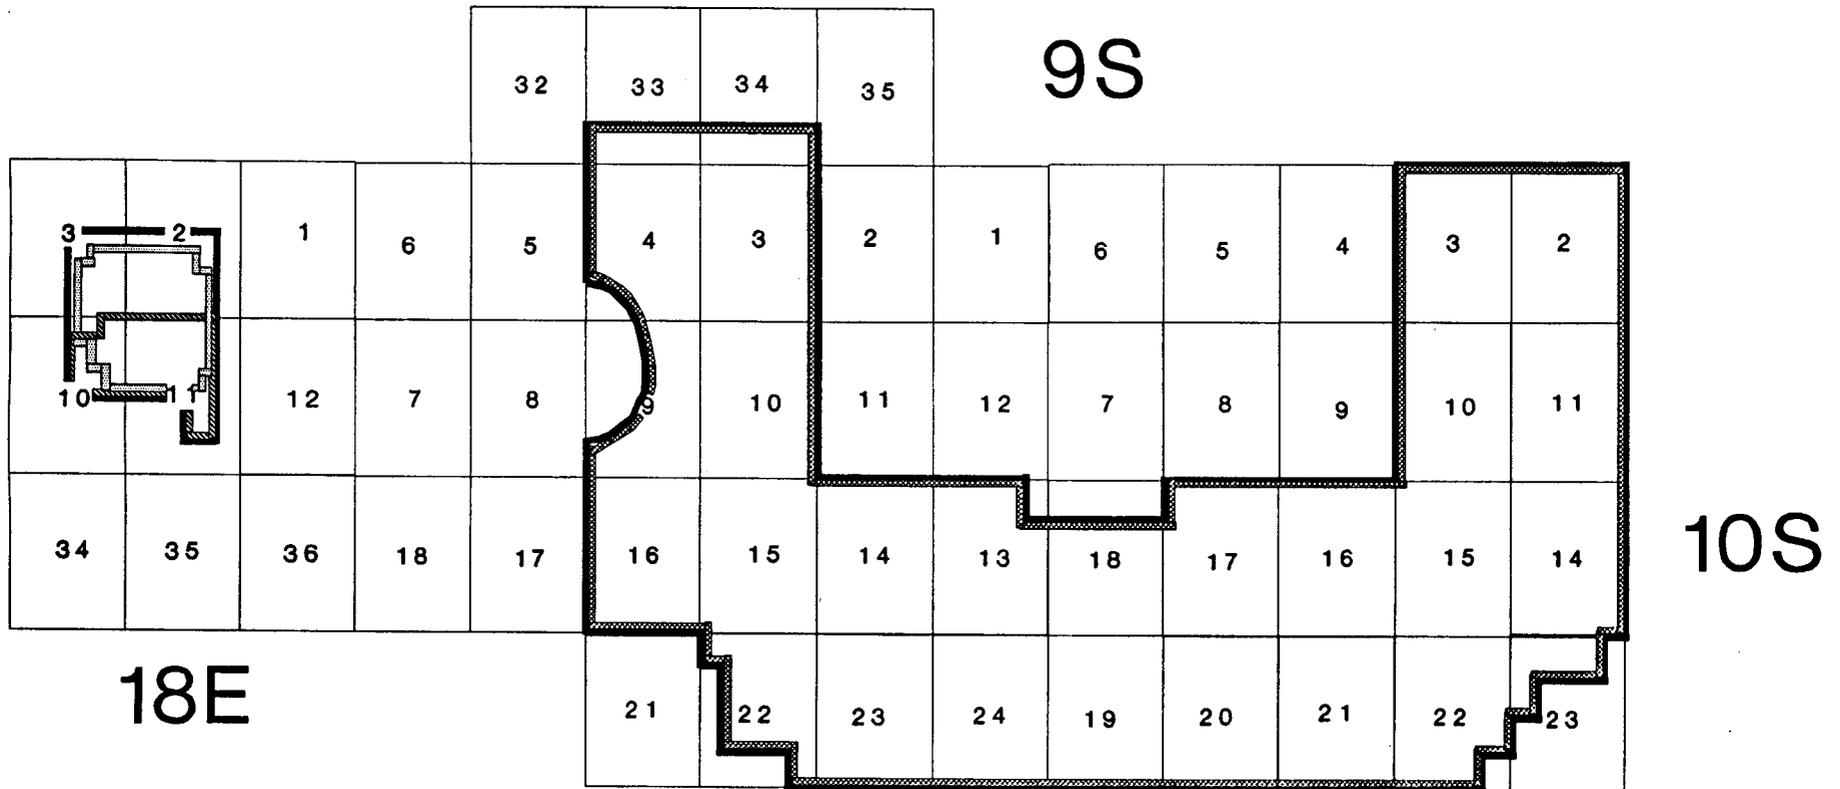

EFFECTIVE: MARCH 21, 1977

- UNIT OUTLINE (UTU63054X)
- WASATCH-MESAVERDE PA "A-B"
- WASATCH-MESAVERDE PA "C"
- GREEN RIVER PA "A"


AS EXPANDED JUNE 1, 1993

16,000.88 ACRES

WSTC-MSVD PA "A-B" ALLOCATION	
FEDERAL	86.4963%
STATE	10.0738%
INDIAN	3.4299%
15,160.88 Acres	

WSTC-MSVD PA "C" ALLOCATION	
FEDERAL	100.00%
400.00 Acres	

GREEN RIVER PA "A" ALLOCATION	
FEDERAL	73.0159%
STATE	26.9841%
630.00 Acres	




DIVISION OF OIL, GAS & MINING

OPERATOR: CNG PRODUCING (N0605)

FIELD: NATURAL BUTTES (630)

SEC. 23, TWP. 10S, RNG. 20E,

COUNTY: UINTAH UAC: R649-3-3 EXCEPTION SPACING

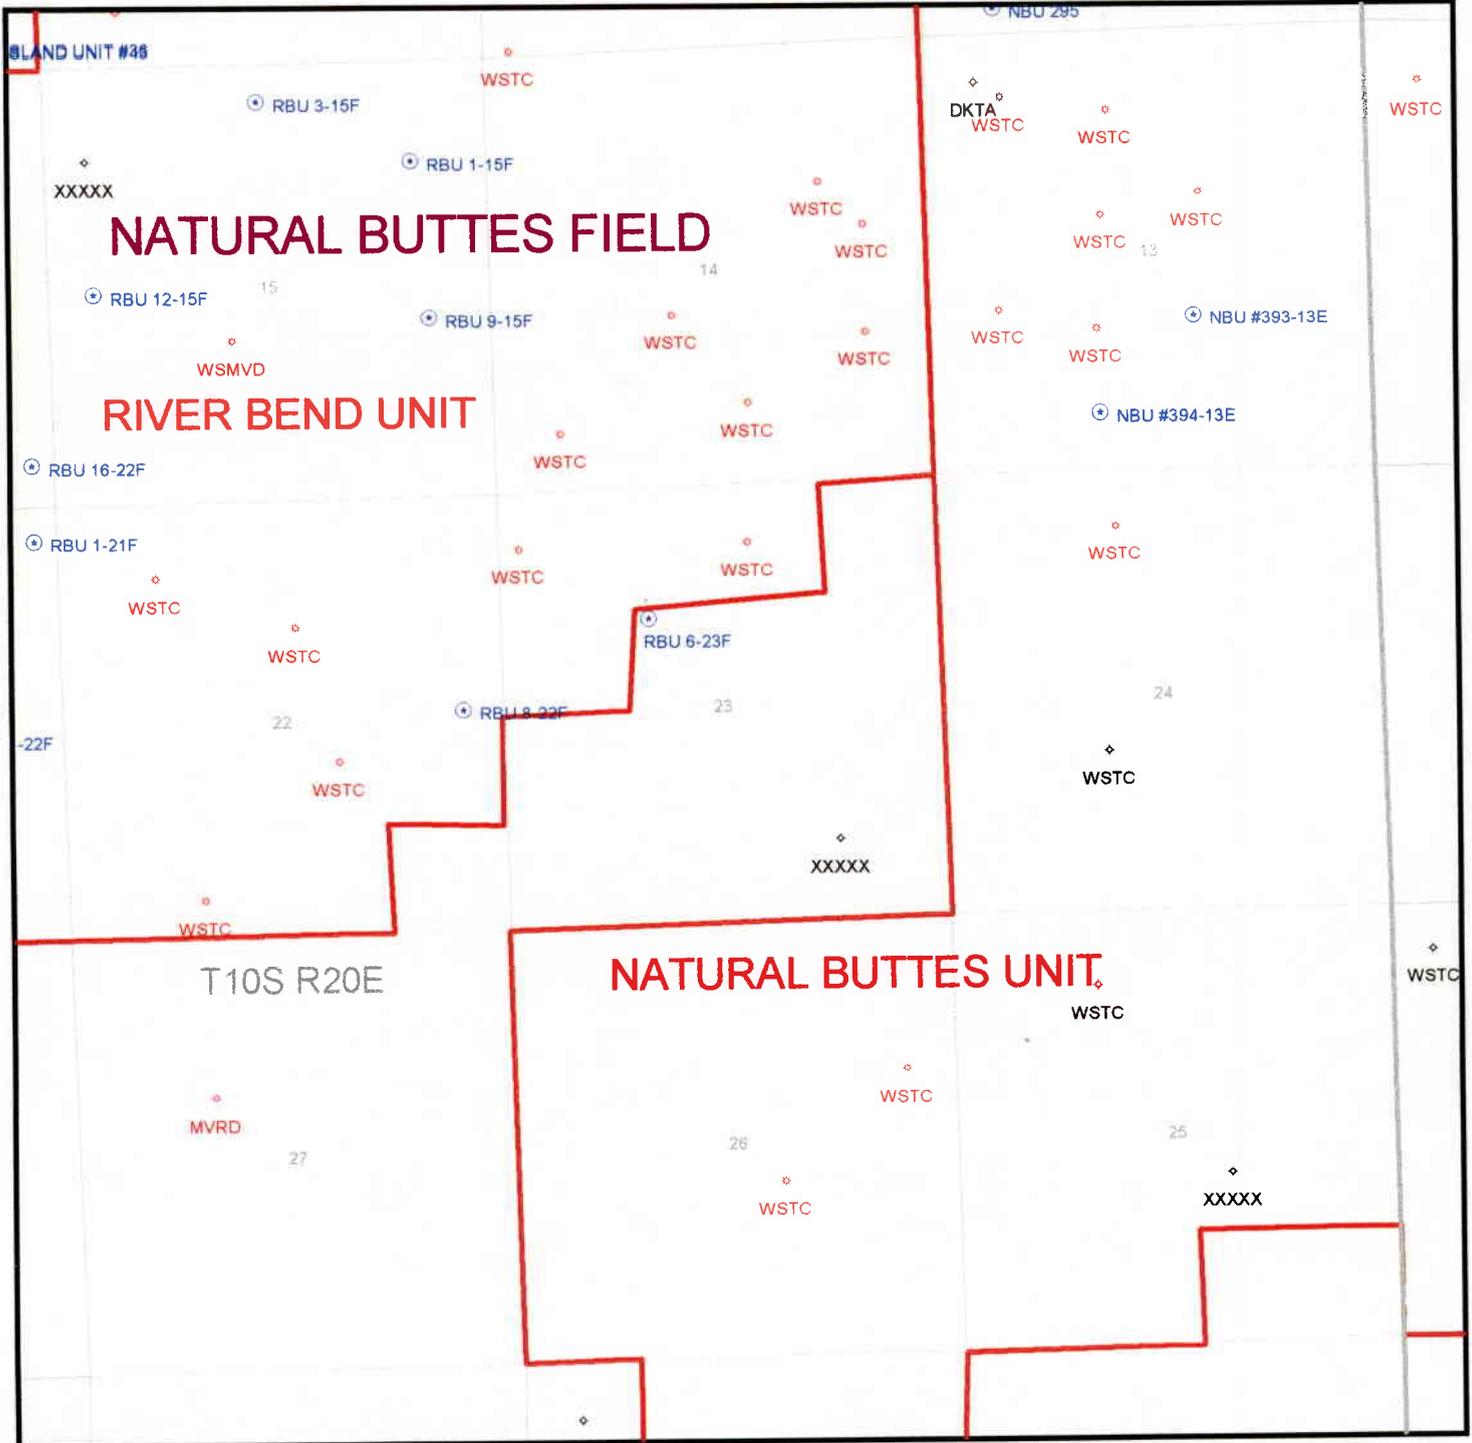

DATE PREPARED:
6-APR-1998

Form 3160-3
(JULY 1982)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPPLICATE*
(Other instructions on
reverse side)

FORM APPROVED
OMB NO. 1004-0138
Expires: February 28, 1998

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK
 DRILL DEEPEN

b. TYPE OF WELL
 OIL WELL GAS WELL OTHER SINGLE ZONE MULTIPLE ZONE

5. LEASE DESIGNATION AND SERIAL NO.
U-013793-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME
RIVERBEND UNIT

8. FARM OR LEASE NAME WELL NO.
RBU 6-23F

9. API WELL NO.

10. FIELD AND POOL, OR WILDCAT
NATURAL BUTTES 630

11. SEC. T., R., M., OR BLK AND SURVEY OR AREA
23-T108-R20E

12. COUNTY OR PARISH
UINTAH

13. STATE
UTAH

17. NO. OF ACRES ASSIGNED TO THIS WELL
80 ACRES

20. ROTARY OR CABLE TOOLS
ROTARY

22. APPROX. DATE WORK WILL START
JUNE 15, 1998

2. NAME OF OPERATOR
CNG PRODUCING COMPANY

3. ADDRESS AND TELEPHONE NO.
CNG TOWER - 1450 POYDRAS STREET, NEW ORLEANS, LA 70112-8000

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements*)
At surface 1,752.2' FWL & 1,522.4' FNL of Sec. 23-T108-R20E

At proposed prod. zone

CONFIDENTIAL

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*
10 MILES SW OF OURAY

15. DISTANCE FROM PROPOSED LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT.
(Also to nearest drng. line, if any) 3,528

18. NO. OF ACRES IN LEASE
1,800

18. DISTANCE FROM PROPOSED LOCATION TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, F 1,850


19. PROPOSED DEPTH
6450

21. ELEVATIONS (Show whether DP, RT, GR, etc.)
UNGRADED 5,007.8

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4"	8 5/8"	24#	+/- 350	
7 7/8"	5 1/2"	17#	+/- 6,450	

1. Drill a 12 1/4" hole with an air rig to ±350', run 8 5/8", K-55 casing and cement to surface.
2. Nipple up and pressure test BOP stack prior to drilling out below surface pipe.
3. Operate pipe rams daily and blind rams as possible.
4. Drill a 7 7/8" hole to 6,450' with a KCL water mud system. Coring is possible. DST's will be run as needed to evaluate unexpected growth.
5. Run logs, set 5 1/2" 17# N-80 casing as dictated by drilling shows, tests, and logs. Casing program may be modified to provide added burst strength if needed for frac program.
6. Primary zones of interests are the Wasatch, Chapita Wells and Ute/land Buttes.
7. All zones indicating potential for economically recoverable reserves will be tested in a normal, prudent manner.
8. In the event circulation is lost, air or air assisted mud will be utilized.



FORMATION TOPS DEPTHS

Wasatch Tongue	3,865'
Green River Tongue	4,215'
Wasatch	4,340'
Chapita Wells	5,065'
Ute/land Buttes	6,050'

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

SIGNED Susan Sachitara TITLE Onshore Drilling Manager DATE March 30, 1998

(This space for Federal or State Office Use)

PERMIT NO. _____ APPROVAL DATE _____

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations there

CONDITIONS OF APPROVAL, IF ANY:


APPROVED BY _____ TITLE _____ DATE _____

*See Instructions On Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.


T10S, R20E, S.L.B.&M.

CNG PRODUCING CO.

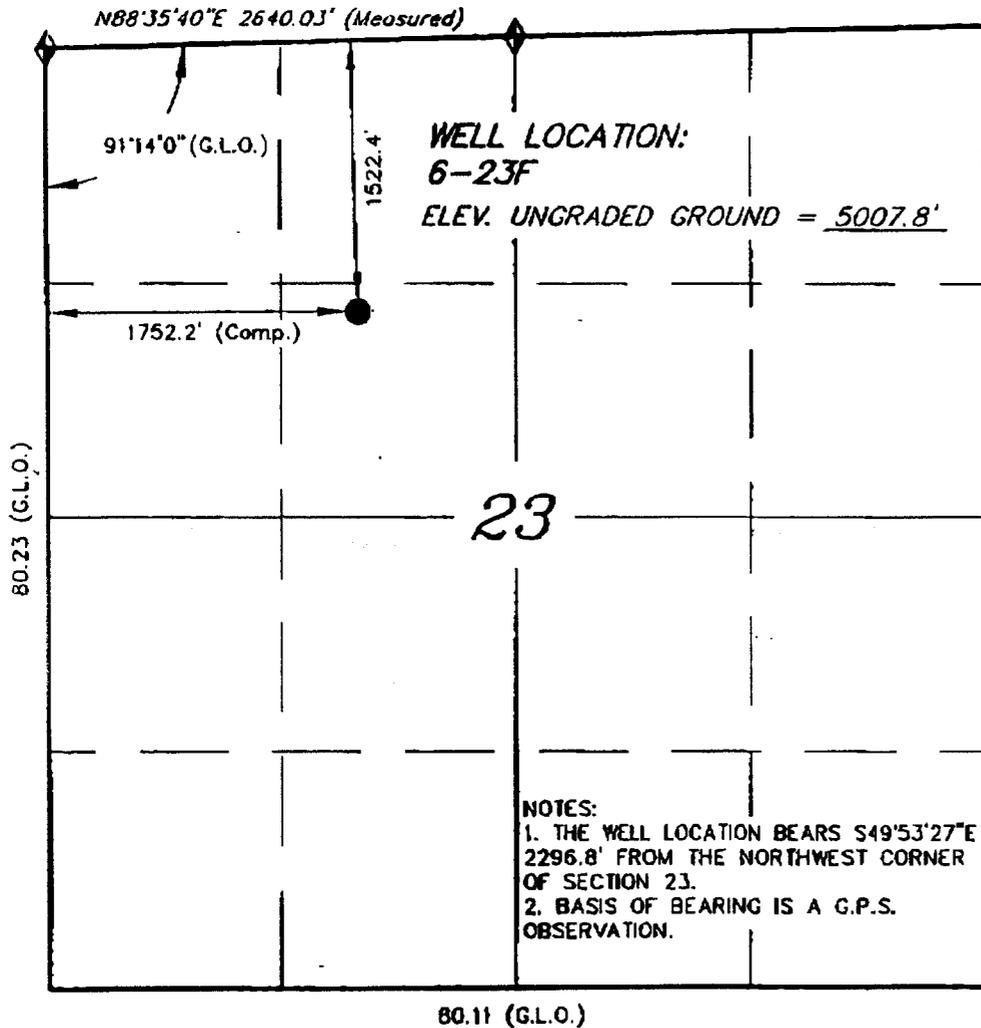


WELL LOCATION, 6-23, LOCATED AS SHOWN IN THE SE 1/4 NW 1/4 OF SECTION 23, T10S, R20E, S.L.B.&M. UINTAH COUNTY, UTAH.

CONFIDENTIAL

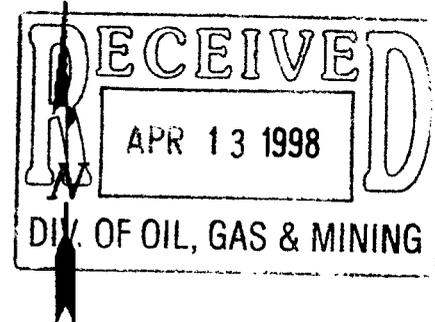

NOTES:
 1. THE WELL LOCATION BEARS S49°53'27"E 2296.8' FROM THE NORTHWEST CORNER OF SECTION 23.
 2. BASIS OF BEARING IS A G.P.S. OBSERVATION.

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

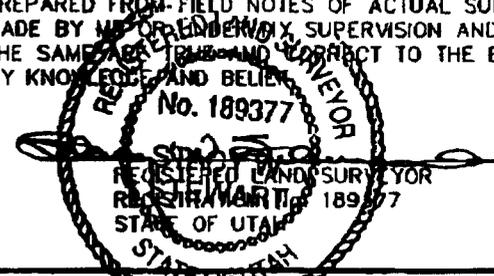

TRI STATE LAND SURVEYING & CONSULTING
 38 WEST 100 NORTH - VERNAL, UTAH 84078
 (801) 781-2501

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV; U.S.G.S. 7-1/2 min QUAD (BIG PACK MTN. NW)

SCALE: 1" = 1000'	SURVEYED BY: DS BG
DATE: 11/25/97	WEATHER:
NOTES:	FILE # CNG6-23

APR 09 '98 03:39PM CNG PRODUCING MKTS


P.4/5

**CNG Producing
Company**A **CNG** COMPANY

CNG Tower
1450 Poydras Street
New Orleans, LA 70112-6000
(504) 593-7000

March 30, 1998

**Mr. Wayne Bankart
U.S. Dept. of the Interior
Bureau of Land Management
Vernal District Office
170 South 500 East
Vernal, UT 84078**



**RE: Application for Permit to Drill
RBU 6-23F, Sec. 23-T10S-R20E**

Dear Wayne:

Enclosed please find an original and two copies of the above referenced Application for Permit to Drill for the above referenced well.

CNG Producing Company is requesting that all well information be held strictly confidential.

Should you have any questions please feel free to contact either myself at (504) 593-7260 or our project engineer, David Linger at (281) 873-1561.

Sincerely,

Susan H. Sachitana
Susan H. Sachitana
Regulatory Reports Administrator

Enclosure

cc: Utah Board of Oil, Gas & Mining
David Linger
Nelda Decker
Mitch Hall (letter only)

LAW OFFICES

PRUITT, GUSHEE & BACHTELL

SUITE 1850 BENEFICIAL LIFE TOWER

SALT LAKE CITY, UTAH 84111-1405

(801) 531-8446

E-mail: pgsblc@aol.com


TELECOPIER (801) 531-8468

ROBERT G. PRUITT, JR.
OLIVER W. GUSHEE, JR.
THOMAS W. BACHTELL
A. JOHN DAVIS, III
JOHN W. ANDERSON
FREDERICK M. MACDONALD
JOHN F. WALDO
ANGELA L. FRANKLIN
JOHN S. FLITTON
MICHAEL S. JOHNSON
CHRISTOPHER J. CASTILLO

OF COUNSEL

April 13, 1998

HAND DELIVERED



Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
Salt Lake City, UT 84114-5801

Re: *Request for Exception Location for RBU 6-23F Well
Township 10 South, Range 20 East, SLM
Section 23
Uintah County, Utah*


Gentlemen:

This office represents CNG Producing Company ("CNG") in the above described matter. Pursuant to Utah Admin. Code R649-3-3, CNG hereby requests approval to drill the RBU 6-23F well as an exception to the general state spacing pattern set forth in Utah Admin. Code R649-3-2(1). Specifically, CNG proposes that the well be located 1,752.2 feet FWL and 1,522.4 feet FNL in the SE $\frac{1}{4}$ NW $\frac{1}{4}$ of above referenced Section 23. See attached Application for Permit to Drill.

This exception location is being requested based on the geology in that area. CNG believes that the proposed location will result in the optimal recovery of oil and gas. CNG owns 100% of the applicable oil and gas leasehold working interest within a 460 foot radius of the proposed exception location.

Approval of this exception location for the RBU 6-23F well is requested as the best location for drilling of this well within the SE $\frac{1}{4}$ NW $\frac{1}{4}$ of Section 23, Township 10 South, Range 20 East, SLM. Your assistance in this matter is greatly appreciated. If you have any questions or concerns, please do not hesitate to contact me.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 4/13/98
By: 

Very truly yours,



Angela L. Franklin

ALF:sh
cc: Charles Herring, CNG
Enclosure
0936.00
0936corr\dogm.ltr



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt
Governor
Ted Stewart
Executive Director
James W. Carter
Division Director

1594 West North Temple, Suite 1210
Box 145801
Salt Lake City, Utah 84114-5801
801-538-5340
801-359-3940 (Fax)
801-538-7223 (TDD)

April 14, 1998

CNG Producing Company
CNG Tower
1450 Poydras Street
New Orleans, LA 70112-6000

Re: RBV 6-23F, 1752.2' FWL, 1522.4' FNL, SE NW
SEC. 23, T. 10 S., R. 20 E., Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. 40-6-1 et seq., Utah Administrative Code R649-3-1 et seq., and the attached Conditions of Approval, approval to drill the referenced well is granted.

CNG Producing Company has submitted the required information, therefore Administrative Approval of the requested exception location is granted

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-33087.

Sincerely,

for John R. Baza
Associate Director

ls

Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: CNG PRODUCING COMPANY
Well Name & Number: RBU 6-23F
API Number: 43-047-33087
Lease: U-013793-A
Location: SE NW Sec. 23 T. 10 S. R. 20 E.

Conditions of Approval

1. General
Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for Permit to Drill.
2. Notification Requirements
Notify the Division within 24 hours following spudding the well or commencing drilling operations. Contact Jim Thompson at (801)538-5336.

Notify the Division prior to commencing operations to plug and abandon the well. Contact John R. Baza (801)538-5334.
3. Reporting Requirements
All required reports, forms and submittals shall be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.
4. State approval of this well does not supercede the required federal approval which must be obtained prior to drilling.


**CNG Producing
Company**

A CNG COMPANY

CNG Tower
1450 Poydras Street
New Orleans, LA 70112-6000
(504) 593-7000

April 21, 1998

Utah Board of Oil Gas & Mining
1594 West North Temple
Suite 1210
Salt Lake City, UT 84114-5801



ATTN: Lisha

RE: Well Spacing Exception Locations
RBU 6-23F 43-047-33087
RBU 16-22F

Dear Lisha:

CNG Producing Company would like to apply for a spacing exception for the above referenced locations due to topography. In accordance with Rule 649-3-2 enclosed is a vicinity map of our Riverbend Unit with a 460' radius circled around each of these wells. The Bureau of Land Management is the surface owner and CNG Producing Company is the operator of the area within the 460' radius surrounding these wells.

If you have any questions or need any additional information to process this exception, please contact me at (504) 593-7260.

Sincerely,

CNG PRODUCING COMPANY

Susan Sachitana
Susan H. Sachitana
Regulatory Reports Administrator

Enclosure

cc: Nelda Decker
David Linger
Mitch Hall
Well History Files

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE*
(Other instructions on
reverse side)

FORM APPROVED
OMB NO. 1004-0136
Expires: February 28, 1995

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK

DRILL DEEPEN

RECEIVED

MAR 31 1998

b. TYPE OF WELL

OIL WELL GAS WELL OTHER SINGLE ZONE MULTIPLE ZONE

2. NAME OF OPERATOR

CNG PRODUCING COMPANY

3. ADDRESS AND TELEPHONE NO.

CNG TOWER - 1450 POYDRAS STREET, NEW ORLEANS, LA 70112-6000

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements*)

At surface 1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E

At proposed prod. zone

CONFIDENTIAL

5. LEASE DESIGNATION AND SERIAL NO.
U-013793-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME
RIVERBEND UNIT

8. FARM OR LEASE NAME WELL NO.

RBU 6-23F

9. API WELL NO.

10. FIELD AND POOL, OR WILDCAT

NATURAL BUTTES 630
11. SEC. T., R., M., OR BLK.
AND SURVEY OR AREA

23-T10S-R20E

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

10 MILES SW OF OURAY

12. COUNTY OR PARISH
UINTAH

13. STATE
UTAH

15. DISTANCE FROM PROPOSED*
LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT.

(Also to nearest drlg. line, if any) 3,528

16. NO. OF ACRES IN LEASE

1,600

17. NO. OF ACRES ASSIGNED
TO THIS WELL

80 ACRES

18. DISTANCE FROM PROPOSED LOCATION*

TO NEAREST WELL, DRILLING, COMPLETED,
OR APPLIED FOR, ON THIS LEASE, F 1,850

19. PROPOSED DEPTH

6450

20. ROTARY OR CABLE TOOLS

ROTARY

21. ELEVATIONS (Show whether DF, RT, GR, etc.)
UNGRADED 5,007.8'

22. APPROX. DATE WORK WILL START
JUNE 15, 1998

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4"	8 5/8"	24#	+/- 350	
7 7/8"	5 1/2"	17#	+/- 6,450	

1. Drill a 12 1/4" hole with an air rig to ±350', run 8 5/8", K-55 casing and cement to surface.
2. Nipple up and pressure test BOP stack prior to drilling out below surface pipe.
3. Operate pipe rams daily and blind rams as possible.
4. Drill a 7 7/8" hole to 6,450' with a KCL water mud system. Coring is possible. DST's will be run as needed to evaluate unexpected shows.
5. Run logs, set 5 1/2" 17# N-80 casing as dictated by drilling shows, tests, and logs. Casing program may be modified to provide added burst strength if needed for frac program.
6. Primary zones of interests are the Wasatch, Chapita Wells and Uteland Buttes.
7. All zones indicating potential for economically recoverable reserves will be tested in a normal, prudent manner.
8. In the event circulation is lost, air or air assisted mud will be utilized.

FORMATION TOPS	DEPTHS
Wasatch Tongue	3,865'
Green River Tongue	4,215'
Wasatch	4,340'
Chapita Wells	5,065'
Uteland Buttes	6,050'

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

SIGNED Susan Sachitara TITLE Onshore Drilling Manager DATE March 30, 1998
David L. Linger

(This space for Federal or State office use)

PERMIT NO. _____

APPROVAL DATE _____

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations there
CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY [Signature] TITLE _____

Assistant Field Manager
Mineral Resources

DATE JAN 06 1999

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED

98PS0128A

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: CNG Producing Company

Well Name & Number: RBU 6-23F

API Number: 43-047-33087

Lease Number: U - 013793-A

Location: SENW Sec. 23 T. 10S R. 20E

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

The operator is fully responsible for the actions of his All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas Orders, and the approved plan of operations. subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to Tim Ingwell of this office **prior to setting the next casing string or requesting plugging orders**. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected.

2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a **3M** system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

If an air compressor is on location and is being utilized to provide air for the drilling medium while drilling, the special drilling requirements in Onshore Oil and Gas Order No. 2, regarding air or gas drilling shall be adhered to. If a mist system is being utilized then the requirement for a deduster shall be waived.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint.

As a minimum, the usable water and oil shale resources shall be isolated and/or protected by having a cement top for the production casing at least 200 ft. above the top of the Mahogany oil shale zone, identified at 1,349 ft. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the AO. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vaporproof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the AO.

A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. One copy of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communication, not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5(d) shall be submitted to the appropriate Field Office within 60 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (1).

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling onlease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries. Tests for meter accuracy will be conducted on initial meter installations and at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, please contact one of the following individuals:

Ed Forsman (435) 789-7077
Petroleum Engineer

Wayne P. Bankert (435) 789-4170
Petroleum Engineer

Jerry Kenczka (435) 781-1190
Petroleum Engineer

BLM FAX Machine (435) 781-4410

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids.

SURFACE CONDITIONS OF APPROVAL

Thirty (30) foot wide Rights-Of-Way (ROWs) corridor shall be granted for the following:

Access roads which shall have constructed travel width limited to 18 feet, except as needed for sharp curves or intersections or where deep cuts are required for road construction. The new access will be about 800 feet in length and will be in a corridor shared with the proposed flowline. Another 1000 feet of flowline will be laid adjacent existing roads to a suitable tie in point as described in the APD.

Surface pipelines will be constructed to lay on the soil surface, and the ROW for the pipeline will not be bladed or cleared of vegetation. The line shall either be constructed on the road and then lifted from the road to its intended location paralleling the road, or it shall be welded in place at a welding station at the wellsite or on the access road and then dragged into place with a suitable piece of equipment so it will not destroy the natural vegetation.

About 800 feet of the 2 inch diameter surface flowline shall be constructed parallel to the proposed new access road and another 1000 feet will be constructed adjacent existing roads to reach a tie in point at well 4-23F on the east edge of that well pad. There are presently enough proposed projects in the area that the gathering line at 4-23F will probably require replacement by at least a 4 inch line soon. CNG has provided a map showing this route for the flowline to include with the APD in the wellfile.

A paleontological monitor shall be on site during all ground disturbing activity. This monitor should also evaluate any ground disturbance associated with pipeline construction in this area. It is recommended that some of the fossils found be collected before construction begins (mammalian and good turtle and crocodile fossils) so the person monitoring the paleontology should be notified before construction begins so they can arrange for an authorized collection of these fossils. All unauthorized personnel will refrain from collecting artifacts and from disturbing any significant cultural or paleontological resources in the area.

CNG has been informed that the area has been identified as crucial pronghorn (antelope) habitat. The APD states that construction and drilling activities will not be conducted during the season May 15 through June 20. This will allow CNG to avoid construction during the antelope kidding season and be consistent with our RMP Lease Notice for pronghorn.

Topsoil will be stockpiled as shown in the layout diagram. Topsoil from the reserve pit may be stockpiled adjacent to the pit waste material so that it can easily be respread over the pit after the pit is filled in. The pit will be reclaimed within six months from the date of well completion. At the time when the reserve pit is reclaimed, topsoil from the reserve pit should be respread over it and reseeded as per the recommended seed mixture. The reserve pit is in fill at this location so when the final abandonment for this location is approved, then the topsoil on the pit should be stripped off and when the entire pad is recontoured the topsoil should be respread and reseeded. Actually in this case the reserve pit area may be, if CNG prefers, recontoured when it is first reclaimed to route the drainage presently crossing the pit back to its' original channel. During drilling all affected existing drainages will be rerouted to the West side of the pad and flow from there into the natural drainage at the Northwest corner of the pad.

Recommended Seed Mixture

Nuttalls saltbush	<i>Atriplex nuttalli v.cuneata</i>	3 lbs./acre
Fourwing Saltbush	<i>Atriplex canescens</i>	4 lbs./acre
Shadscale	<i>Atriplex confertifolia</i>	3 lbs./acre
Western Wheatgrass	<i>Agropyron smithii</i>	2 lbs./acre

All poundages are Pure Live Seed. This seed mixture is to be used when the reserve pit is reclaimed and also is recommended for final abandonment reseeding.

Before the site is abandoned, the company will be required to restore the well site and ROWs to near their original state. The disturbed areas will be reseeded with desirable perennial vegetation.

Noxious weeds will be controlled on the well site and rights-of-way. If noxious weeds spread from the project area onto adjoining land, the company will also be responsible for their control.

Reserve pits will be lined with impervious synthetic liners. Liners will be constructed to lay under the mud tanks, and they will be reinforced to prevent the liner from developing holes where fluids flow from the mud tank into the reserve pit. Prior to backfilling the reserve pit all fluids will be pumped from the pit into trucks and hauled to approved disposal sites. When the pits are backfilled, the surplus oil and mud etc. will be buried a minimum depth of 3.0 feet below the surface of the soil.

The flare pit will be adjacent to the reserve pit.

A closed production system will be used. Production fluids will be contained in leak proof tanks. All production fluids will be disposed of at approved disposal sites. The indiscriminate dumping of production fluids on roads, wellsites or other areas will not be allowed.

CONDITIONS OF APPROVAL FOR THE SURFACE GAS LINE

1. No blading will be allowed on surface pipelines unless the Vernal Field Office minerals staff are consulted and approval has been obtained prior to the blading.
2. Greg Darlington of the Vernal Office Minerals Staff will be notified 24 hours prior to the start of construction.
3. Surface lines will be either black or brown in color. If the line is insulated then the color of the pipeline should be similar to the color of the well pad facilities in the vicinity.
4. Pipeline construction will not occur during periods of wet soil conditions.
5. The surface gas line shall not block or change the course of existing drainages. Drainage crossings will be designed to prevent damage to the flowline during periods of high seasonal and storm runoff.
6. If cultural resources are found during construction, all work which could impact these resources will stop and the Vernal Field Office will be notified.
7. Vehicle use will be restricted to the pipeline route in off road areas. It will be authorized there as needed for construction and maintenance and operations on the lease.
8. The metering of all gas production will be done in accordance with Onshore Order No. 5.

February 26, 1999

Mr. Ed Forsman
Dept. of the Interior
Bureau of Land Management
Vernal District Office
170 South 500 East
Vernal, UT 84078

RE: RBU 13-3F Sec. 3-T10S-R20E
RBU 6-23F Sec. 23-T10S-R20E

Dear Ed:


Enclosed please find an original and two copies of our sundry notices requesting permission to deepen the above referenced wells.

If you have any questions or need any further information, please feel free to contact me at (504) 593-7260 or our Manager, Onshore Drilling, David Linger, at (281) 873-1561.

Sincerely,

Susan H. Sachitana
Susan H. Sachitana
Regulatory Reports Administrator

cc: **Utah Board of Oil, Gas & Mining**
David Linger
Nelda Decker
Mitch Hall
Well History Files



UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
EXPIRES: July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instruction on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. U-013793-A
2. Name of Operator CNG PRODUCING COMPANY		6. If Indian, Allottee or Tribe Name
3a. Address 1450 POYDRAS ST, NEW ORLEANS, LA 70112-6000	3b. Phone No. (include area code) (504) 593-7000	7. If Unit or CA/ Agreement, Name and/or No. RIVER BEND UNIT
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E		8. Well Name and No. RBU 6-23F
CONFIDENTIAL		9. API Well No. 43-047-33087
		10. Field and Pool, or Exploratory Area NATURAL BUTTES 630
		11. County or Parish, State UINTAH, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input checked="" type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandonment	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation have been completed, and the operator has determined that the site is ready for final inspection.)


CNG Producing Company request permission to amend the approved drilling permit as follows:

Amend TD from 6,450' to 8,500'

Set 5 1/2" casing at 8,500'

Formation Tops	Depths
Wasatch Tongue	3,865'
Green River Tongue	4,215'
Wasatch	4,340'
Chapita Wells	5,065'
Uteland Buttes	6,050'
Mesaverde	7,100'

See Attached Drilling Plan



14. I hereby certify that the forgoing is true and correct Name (Printed/Typed) SUSAN H. SACHITANA	Title REGULATORY REPORTS ADMINISTRATOR
Signature <i>Susan H. Sachitana</i>	Date 990317

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by <i>Bradley G. Hill</i>	BRADLEY G. HILL RECLAMATION SPECIALIST III	Date 3/25/99
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**DRILLING PLAN
APPROVAL OF OPERATIONS**

March 17, 1999

Attachment for Permit to Drill

Name of Operator: CNG PRODUCING COMPANY
Address: CNG TOWER - 1450 POYDRAS STREET
NEW ORLEANS, LA 70112-6000

WELL LOCATION: Well No. 6-23F

Uintah, Utah

1. **GEOLOGIC SURFACE FORMATION**

Uintah

2. **ESTIMATE IMPORTANT GEOLOGIC MARKERS**

Formation	Depth
Wasatch Tongue	3865'
Green River Tongue	4215'
Wasatch	4340'
Chapita Wells	5065'
Uteland Buttes	6050'
Mesaverde	7100'

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS**

Formation	Depth	Remarks
Wasatch Tongue	3865'	Oil Zone
Green River Tongue	4215'	Oil Zone
Wasatch	4340'	Gas Zone
Chapita Wells	5065'	Gas Zone
Uteland Buttes	6050'	Gas Zone
Mesaverde	7100'	Gas Zone

4. **PROPOSED CASING PROGRAM**

All casing used to drill this well will be new casing.
13 3/8", 54.5 #/ft K-55 -0' - 84' - Cemented to Surface
8-5/8", 24#/ft, K-55, 0'-3,000' - Cemented to Surface
5 1/2", 17#/ft, N-80, 0'- 8500' - Cemented to Surface

5. **OPERATOR'S MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL**

BOP stack has a 3000 psi working pressure. BOP will be pressure tested to 3,000 psi before drilling casing cement plug. Pipe rams will be operated daily and blind rams as possible.

6. The well is to be drilled with a KCL mud system maintaining a weight of approximately 9 - 9.7#/gal.
7. An automatic ignitor will not be installed on the blooie line.
8. A 90° bend on the blooie line, located approximately 50' from the wellhead on the pit side past the mud tank will be installed. Total length of the blooie line will remain 100' from the wellhead.

9. **AUXILIARY EQUIPMENT TO BE USED**

1. Kelly Cock.
2. Full opening valve on floor with DP connection for use when Kelly is not in string.

10. **TESTING, LOGGING, AND CORING PROGRAMS TO BE FOLLOWED**

Possible DST in Wasatch Tongue. The logging program will include Dual Lateral/GR log TD to Surface, Density/Neutron - TD - 3,500' possible dipmeter and rotary cores over selected intervals.

11. **ANTICIPATED ABNORMAL PRESSURES OR TEMPERATURES EXPECTED**

No normal pressures are anticipated nor is the area known for abnormal temperatures. The formations to be penetrated do not contain H₂S gas. The anticipated bottom hole pressure is 3,980 PSI.

12. **WATER SUPPLY**

- A. Water to be used for drilling will be hauled Section 32-T6S-R20E. User's Claim - Code #43, Serial #9077.
- B. No pipelines are anticipated. Hauling will be on the road(s) shown in Attachment No. 3.
- C. No water well is anticipated to be drilled at this time.

13. **CEMENT SYSTEMS**

CONDUCTOR

Ready-mix cement to surface.

SURFACE

Tail Slurry: +/-250 sks Class "G" cement, 2% CaCl₂, and .25#/sk flake. Mixed at 15.8 ppg. Yield 1.16 ft³/sk, water 4.96 gal/sk.

Lead Slurry: +/-600 sk 28:72 Poz and 10% gel + 6 lb/sk KOL seal + 3 lb/sk CSE + .5% SM + .25 lb Flake mixed at 11.0 lb/gel yield - 3.37 ft³/sk, excess 100%.

PRODUCTION

Lead Slurry: +/-350 sk 28:72 Poz and 10% gel + 6 lb/sk KOL seal + 3 lb/sk CSE + .5% SM + .25 lb Flake mixed at 11.0 lb/gel yield - 3.37 ft³/sk.

Tail Slurry: +/-770 sk Class G, 10% gypsum, 3% Salt, .2% retarder mixed at 14.8 ppg, yield - 1.47 ft³/sk water - 6.93 gal/sk

14. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS**

Starting Date: March 31, 1999
Duration: 20 Days

SURFACE CASING CEMENT PROGRAM

Set 8 5/8" casing in 12 1/4" open hole cement to surface. Volume calculated using 75% excess.

SPACER:

Pump 20 bbls lightly gelled water followed by 5 bbls fresh H₂O ahead of cement to water wet the well bore after air drilling. Displace with fresh water.

CEMENT SYSTEM

± 500 sks Leads Cement 28:72 Poz (28% Poz: 72% Class C) + 10% gel + 6 lb/sk KOL seal + 3 lb/sk CSE + .5% SM + .25 lb/sk Cello Flake

Weight	11.0 lb/gal
Yield	3.37 ft ³ /sk
Water	20.48 gal/sk

Thickening Time at 118° 5+ hours

Compressive Strength at 80° 24 hrs 375 PSI

± 250 SKS Class G "Tail-In" Cement, 2% CaCl₂, . 25#/sk Celloflake.

Weight	15.80 lb/gal
Yield	1.17 ft ³ /sk
Water	4.99 gal/sk

Thickening Time at 118° 1:42 minutes

Compressive Strength at 80°
8 hrs 750 PSI
16 hrs 1800 PSI
24 hrs 2400 PSI

± 100 - 200 sks Top-out cement, 2% CaCl₂, . 25#/sk Celloflake

Run 1" tubing in annulus to ± 200' and cement to surface.

CASING HARDWARE:

1 Cement Guide Shoe
1 Float Collar
8 Centralizers
1 Stop Ring
1 Thread Lock
1 Top Wood Plug

LONGSTRING CEMENT

Set 5 1/2" casing in a 7 7/8" open hole.
Lease cement slurry to fill from 750' above top pay zone to surface.
Tail cement slurry to fill from TD to 750' above the pay zone.
Both volumes are calculated using 25% excess.

SPACER:

(KCL Mud System) 10 bbl water

Displace with 3% KCL water using .2% L-55 Clay Stabilizer in the first 50 bbls of displacement.

CEMENT SYSTEMS

Lead Slurry

± 350 sks Hi-Lift, 3% Salt, 10#/sk silsonite, .25#/sk Celloflake.

Weight	11.00 lb/gal
Yield	3.42 ft ³ /sk
Water	21.07 gal/sk

Thickening Time at 180°	4 hrs +
Compressive Strengths in 24 hrs	375 PSI
Fluid Loss	240 cc/30 minutes

Tail Slurry

± 700 sks Class G, 10% gypsum, 3% Salt, .2% retarder

Weight	14.8 lb/gal
Yield	1.47 ft ³ /sk
Water	6.93 gal/sk

Thickening Time at 165° BHCT	
Compressive Strength in 12 hrs	845 PSI
24 hrs	1470 PSI



B.J. SERVICES COMPANY
CEMENTING RECOMMENDATION
SURFACE CASING

CONFIDENTIAL

VOLUME CALCULATIONS

4905 FT X 0.4127 CU-FT/FT WITH 0 % EXCESS = 2024 CU-FT
 671 FT X 0.4127 CU-FT/FT WITH 0 % EXCESS = 277 CU-FT
 40 FT X 0.3576 CU-FT/FT WITH 0 % EXCESS = 14 CU-FT (INSIDE PIPE)

TOTAL SLURRY VOLUME: 2315 CU-FT
412 BBL

SLURRY NO.	VOLUME CU-FT	VOLUME FACTOR	AMOUNT AND TYPE OF CEMENT
1	2024 /	3.37 =	600 SACKS 28.72 P02 (28% P02: 72% Class C) + 10.000 % GEL (BENTONITE) + 3.00 LB/SK CSB + 6.00 LB/SK KOL SEAL + 0.500 % SK + 0.25 LB/SK CELLO FLAKE + 193.090 % WATER
2	291 /	1.17 =	250 SACKS CLASS C + 2.000 % CaCl2 + 0.25 LB/SK CELLO FLAKE + 44.210 % WATER

DISPLACEMENT FLUID: 188.6 BBL WATER @ 5.34 LB/GAL

3 87 / 1.16 = 75 SACKS CLASS G - TOP OUT CEMENT
 + 2.000 % CaCl2 - 44.210 % WATER

CEMENT PROPERTIES

	SLURRY NO.1	SLURRY NO.2	SLURRY NO.3
SLURRY WEIGHT (LB/GAL)	11.00	15.80	15.80
SLURRY YIELD (CU-FT PER SACK)	3.37	1.17	1.16
AMOUNT OF MIX WATER (GALS PER SACK)	20.48	4.99	8.00
ESTIMATED PUMP TIME (HR:MIN)	5:00	1:30	1:30

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
EXPIRES: July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instruction on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		7. If Unit or CA/ Agreement, Name and/or No. RIVER BEND UNIT
2. Name of Operator CNG PRODUCING COMPANY		8. Well Name and No. RBU 6-23F
3a. Address 1450 POYDRAS ST, NEW ORLEANS, LA 70112-6000	3b. Phone No. (include area code) (504) 593-7000	9. API Well No. 43-047-33087
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E		10. Field and Pool, or Exploratory Area NATURAL BUTTES 630
		11. County or Parish, State UINTAH, UTAH

CONFIDENTIAL


12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>SPUD NOTICE</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandonment	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation have been completed, and the operator has determined that the site is ready for final inspection.)

The RBU 6-23F was spud on 4/19/99.

Rig up rig. Drill rathole. Drill 17 1/2" hole to 97'. Circulate and condition hole. Trip out of hole. Wait on ready mix.

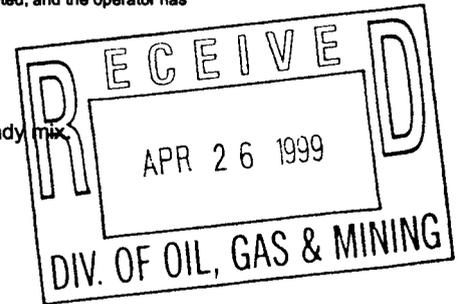

14. I hereby certify that the foregoing is true and correct Name (Printed/Typed) SUSAN H. SACHITANA	Title REGULATORY REPORTS ADMINISTRATOR
Signature <i>Susan H Sachitana</i>	Date 990420

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

OPERATOR CNG PRODUCING COMPANY OPERATOR ACCT. NO. N0605
 ADDRESS CNG TOWER - 1450 POYDRAS STREET
NEW ORLEANS, LA 70112-6000

ENTITY ACTION FORM - FORM 6


ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
B	99999	7050	43-047-33087	RBU #6-23F	SE NW	23	10S	20	UINTAH	4/19/99	
WELL 1 COMMENTS: Well within the <u>Riverbend Unit.</u> <i>990420 entity added; (Wsmvd U/"A-B") KDR</i>										CONFIDENTIAL	
WELL 2 COMMENTS:											
WELL 3 COMMENTS:											
WELL 4 COMMENTS:											
WELL 5 COMMENTS:											

ACTION CODES (See instruction on back of form)

- A - establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

(3/89)



Susan H. Sachitana
 Signature Susan H. Sachitana

Regulatory Reports Administrator 4/20/99
 Title Date

Phone No. (504) 593-7260

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

CONFIDENTIAL

FORM APPROVED
OMB No. 1004-0135
EXPIRES: July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.
SUBMIT IN TRIPLICATE - Other instruction on reverse side

5. Lease Serial No.
U-013793-A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/ Agreement, Name and/or No.
RIVER BEND UNIT

8. Well Name and No.
RBU 6-23F

9. API Well No.
43-047-33087

10. Field and Pool, or Exploratory Area
NATURAL BUTTES 630

11. County or Parish, State
UINTAH, UTAH

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
CNG PRODUCING COMPANY

3a. Address
1450 POYDRAS ST, NEW ORLEANS, LA 70112-6000

3b. Phone No. (include area code)
(504) 593-7000

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E


12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>SUMMARY OF OPERATIONS</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandonment	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation have been completed, and the operator has determined that the site is ready for final inspection.)

WEEKLY REPORT FOR APRIL 19, 1999 - APRIL 23, 1999

Rig up rig. Drill rathole. Drill 17 1/2" hole to 97'. Circulate and condition hole. Trip out of hole. Wait on ready mix. Cement 13 3/8" with 2 yards sand grout. Drill ahead with air mist. Survey at 788' - 1/2". Load hole with fluid and pump sweep. Trip out of hole. Make up 12 1/4" bit and trip in hole. Circulate. Survey at 1,800' - 1/2" and 2,166' - 1 1/4". TD at 2,417'. Mud weight at 8.5 PPG.



14. I hereby certify that the forgoing is true and correct

Name (Printed/Typed)
SUSAN H. SACHITANA

Signature
Susan H. Sachitana

Title
REGULATORY REPORTS ADMINISTRATOR

Date
990423

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

INSPECTION FORM STATE OF UTAH
DIVISION OF OIL GAS AND MINING

DRILLING OPERATIONS

Well Name: <u>River Bend Unit 6-23F</u>	API Number: <u>43-047-33087</u>		
Qtr/Qtr: <u>SE/NW</u>	Section: <u>23</u>	Township: <u>10S</u>	Range: <u>20E</u>
Company Name: <u>CNG</u>			
Lease: <u>State</u>	Fee: _____	Federal: <u>X</u>	Indian: _____
Inspector: <u>David W. Hackford</u>		Date: <u>4/26/99</u>	

Inspection made in accordance with Division Inspection Standards and Procedures for drilling operations, any exceptions noted in comments.

Depth at time of visit: 4164' Last BOPE test recorded: 4/25/99
Drilling Contractor: Union Drilling Co. Rig No. 17

COMMENTS: Survey at 3050' was 1 1/4 degrees. Nipped up with double gate,
annular and rotating head. 2995' of 8 5/8" casing set and cemented.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
EXPIRES: July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instruction on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. U-013793-A
2. Name of Operator CNG PRODUCING COMPANY		6. If Indian, Allottee or Tribe Name
3a. Address 1450 POYDRAS ST, NEW ORLEANS, LA 70112-6000	3b. Phone No. (include area code) (504) 593-7000	7. If Unit or CA/ Agreement, Name and/or No. RIVER BEND UNIT
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E		8. Well Name and No. RBU 6-23F
		9. API Well No. 43-047-33087
		10. Field and Pool, or Exploratory Area NATURAL BUTTES 630
		11. County or Parish, State UINTAH, UTAH

CONFIDENTIAL


12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off	
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity	
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other	SUMMARY OF OPERATIONS
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandonment	<input type="checkbox"/> Temporarily Abandon		
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal		

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation have been completed, and the operator has determined that the site is ready for final inspection.)

WEEKLY REPORT FOR APRIL 24, 1999 - APRIL 30, 1999

Drilling with fluid to 3,010'. Ran survey at 2,430' - 1°. Ran survey at 2,750' - 3/4°. Circulate and condition mud to run casing. Circulate and mix mud. Trip out of hole. Ran 69 jts 8 5/8" 24# & 32# casing. Set at 2,980' with 500 sks of Poz cement. Wait on cement. Nipple up BOP. Test blinds, pipe rams and all valves to 3,000 PSI. Trip in hole. Drilling cement and float collars. Drill ahead. Survey at 3,050' - 1 1/4". Drilling ahead. Survey at 4,035' - 1 3/4". Drilling ahead to 6,220'. Mud wt. at 9.0 PPG.



14. I hereby certify that the forgoing is true and correct Name (Printed/Typed) SUSAN H. SACHITANA	Title REGULATORY REPORTS ADMINISTRATOR
Signature <i>Susan H. Sachitana</i>	Date 990430

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
EXPIRES: July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instruction on reverse side

1. Type of Well
 Oil Well Gas Well Other

CONFIDENTIAL

5. Lease Serial No.
U-013793-A

6. If Indian, Allottee or Tribe Name

2. Name of Operator
CNG PRODUCING COMPANY

7. If Unit or CA/ Agreement, Name and/or No.
RIVER BEND UNIT

3a. Address
1450 POYDRAS ST, NEW ORLEANS, LA 70112-6000

3b. Phone No. (include area code)
(504) 593-7000

8. Well Name and No.
RBU 6-23F

9. API Well No.
43-047-33087

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E

10. Field and Pool, or Exploratory Area
NATURAL BUTTES 630

11. County or Parish, State
UINTAH, UTAH


12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off	
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity	
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>SUMMARY OF OPERATIONS</u>	
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandonment	<input type="checkbox"/> Temporarily Abandon		
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal		

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomplate in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation have been completed, and the operator has determined that the site is ready for final inspection.)

WEEKLY REPORT FOR MAY 1, 1999 - MAY 7, 1999

Drilling to 7,000'. Pump 150 bbl brine pill. Trip out of hole with bit. Trip in hole with new bit. Drilling to 7,422'. Survey at 7,080' - 2". Drilled to 8,200'. Circulate bottoms up. Short trip for 20 stands. Circulate and condition hole for logs. Trip out of hole. Rig up Schlumberger platform express. Trip in hole to log TD to 8,197' and pull DLL/MSFL/Den Neu/GR to 3,000'. Rig down. Trip in hole. Circulate and condition hole to run 5 1/2" casing. Lay down drill pipe. Lay down drilling tools. Circulate hole clean. Ran 194 jts of 5 1/2" 17# N-80 casing. Set at 8,162' with 1,096 sks of Class "G" cement. Rig down equipment. Released rig at 10:00 PM on 5/6/99.



14. I hereby certify that the forgoing is true and correct

Name (Printed/Typed) SUSAN H. SACHITANA	Title REGULATORY REPORTS ADMINISTRATOR
Signature <i>Susan Sachitana</i>	Date 990507

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
-------------	-------	------

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

CONFIDENTIAL

FORM APPROVED
OMB No. 1004-0135
EXPIRES: July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instruction on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. U-013793-A
2. Name of Operator CNG PRODUCING COMPANY		6. If Indian, Allottee or Tribe Name
3a. Address 1450 POYDRAS ST, NEW ORLEANS, LA 70112-6000	3b. Phone No. (include area code) (504) 593-7000	7. If Unit or CA/ Agreement, Name and/or No. RIVER BEND UNIT
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E		8. Well Name and No. RBU 6-23F
		9. API Well No. 43-047-33087
		10. Field and Pool, or Exploratory Area NATURAL BUTTES 630
		11. County or Parish, State UINTAH, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>SUMMARY OF OPERATIONS</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandonment	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation have been completed, and the operator has determined that the site is ready for final inspection.)

WEEKLY REPORT FOR MAY 24, 1999 - MAY 28, 1999

Moved in and set new Natco Dehy/seperator. Moved in and set sivals 300 bbl and 100 bbl tanks. Rig up tank heater in 100 bbl tank. Run 2" sch 80 coated flow line from wellhead to separator with a 18/64" choke at wellhead. Run 2" sch 80 coated blow line from separator to 100 bbl tank with 20/64" choke at separator and rig up plunger dump valve. Run plunger control wire from separator to wellhead. Run 1" coated water dump line from separator to 100 bbl water tank. Run 1" coated condensate line from separator to 300 bbl tank. Run 3/4" plastic gas line from dehy to heater in 100 bbl tank and from dehy to methanol pump at well head. Run 3/8" steel pipe in 3/4" plastic from methanol pump to water dump. Filled unit with Glycol. Rig up methanol pump and gas meter. Location equip ready to put on production. Rig up frac valve. Rig up Computalog and pick up and run in hole with 4.75" gauge ring to 8,122'. No problems. Pull out of hole and pick up and run in hole with CBL gamma ray tool to 8,122' and log to cement top at 100'. Pull out of hole. Rig up pump truck and pressure test to 5,000 PSI for 30 minutes. Held OK. Pick up and run in hole with 3-3/8" gun and perforate Zone #1 7,959'-64' with 1 SPF and 7,970'-72', 7,999'-8,001', 8,012'-14', 8,022'-26' and 8,054'-56' with 2 SPF and 8,080'-92' with 1 SPF - 41 holes total. Pull out of hole. Rig down Computalog.

14. I hereby certify that the forgoing is true and correct Name (Printed/Typed) SUSAN H. SACHITANA	Title REGULATORY REPORTS ADMINISTRATOR
Signature <i>Susan H. Sachitana</i>	Date 990528

RECEIVED
JUN - 3 1999
DIV. OF OIL, GAS & MINING

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
-------------	-------	------

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
EXPIRES: July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.
SUBMIT IN TRIPLICATE - Other instruction on reverse side

5. Lease Serial No.
U-013793-A

6. If Indian, Allottee or Tribe Name

1. Type of Well
 Oil Well Gas Well Other

CONFIDENTIAL

7. If Unit or CA/ Agreement, Name and/or No.
RIVER BEND UNIT

2. Name of Operator
CNG PRODUCING COMPANY

8. Well Name and No.
RBU 6-23F

3a. Address
1450 POYDRAS ST, NEW ORLEANS, LA 70112-6000

3b. Phone No. (include area code)
(504) 593-7000

9. API Well No.
43-047-33087

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E

10. Field and Pool, or Exploratory Area
NATURAL BUTTES 630

11. County or Parish, State
UINTAH, UTAH


12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off	
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity	
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other	SUMMARY OF OPERATIONS
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandonment	<input type="checkbox"/> Temporarily Abandon		
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal		

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomplate in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation have been completed, and the operator has determined that the site is ready for final inspection.)

WEEKLY REPORT FOR MAY 29, 1999 - JUNE 4, 1999

Rig up BJ and frac equipment. Tested lines to 8000 PSI. Tested OK. Obtained injection rate and broke formation down at 5400 PSI. Frac'd Zone #1 (7,959'-64', 7,970'-72', 7,999'-8,001', 8,012'-14', 8,022'-26', 8,054'-56' & 8,080'-92') with 57,944 lbs of 20/40 frac sand. Initial post frac shut-in pressure was 3300 PSI. Opened well up with 3300 PSI and performed a forced closure flowing at 15 bbls at 1/2 BPM rate. Casing pressure declined to 2790 PSI in 1/2 hr. Opened casing to pit on 12/64" choke with 2750 PSI.



14. I hereby certify that the forgoing is true and correct
Name (Printed/Typed)
SUSAN H. SACHITANA

Title
REGULATORY REPORTS ADMINISTRATOR

Signature
Susan Sachitana

Date
990804

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

CONFIDENTIAL

FORM APPROVED
OMB No. 1004-0135
EXPIRES: July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instruction on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. U-013793-A
2. Name of Operator CNG PRODUCING COMPANY		6. If Indian, Allottee or Tribe Name
3a. Address 1450 POYDRAS ST, NEW ORLEANS, LA 70112-8000	3b. Phone No. (include area code) (504) 593-7000	7. If Unit or CA/ Agreement, Name and/or No. RIVER BEND UNIT
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E		8. Well Name and No. RBU 6-23F
		9. API Well No. 43-047-33087
		10. Field and Pool, or Exploratory Area NATURAL BUTTES 630
		11. County or Parish, State UINTAH, UTAH


12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize <input type="checkbox"/> Deepen <input type="checkbox"/> Production (Start/Resume) <input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing <input type="checkbox"/> Fracture Treat <input type="checkbox"/> Reclamation <input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair <input type="checkbox"/> New Construction <input type="checkbox"/> Recomplete <input checked="" type="checkbox"/> Other <u>SUMMARY OF OPERATIONS</u>
	<input type="checkbox"/> Change Plans <input type="checkbox"/> Plug and Abandonment <input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection <input type="checkbox"/> Plug Back <input type="checkbox"/> Water Disposal

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomplate in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation have been completed, and the operator has determined that the site is ready for final inspection.)

WEEKLY REPORT FOR JUNE 10, 1999 - JUNE 11, 1999

Rig up Computalog. Pick up and run in hole with 4.75" gauge ring to 7,925'. No problems. Pull out of hole. Pick up and run in hole with Halliburton composite bridge plug and set at 7,910'. Pull out of hole. Rig up pump truck and fill hole with 175 bbls filtered 2% KCL water and pressure test to 5,000 PSI for 30 minutes. Held OK. Rig down pump truck. Pick up and run in hole with 3-3/8" gun. Perforate Zone #2 7,864'-89' and 7,873'-88' with 2 SPF. Pull out of hole. Rig down Computalog.



14. I hereby certify that the forgoing is true and correct Name (Printed/Typed) SUSAN H. SACHITANA	Title REGULATORY REPORTS ADMINISTRATOR
Signature <i>Susan Sachitana</i>	Date 990611

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
EXPIRES: July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instruction on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. U-013793-A
2. Name of Operator CNG PRODUCING COMPANY		6. If Indian, Allottee or Tribe Name RIVER BEND UNIT
3a. Address 1450 POYDRAS ST, NEW ORLEANS, LA 70112-8000	3b. Phone No. (include area code) (504) 593-7000	7. If Unit or CA/ Agreement, Name and/or No. RIVER BEND UNIT
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E		8. Well Name and No. RBU 6-23F
		9. API Well No. 43-047-33087
		10. Field and Pool, or Exploratory Area NATURAL BUTTES 630
		11. County or Parish, State UINTAH, UTAH

CONFIDENTIAL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize <input type="checkbox"/> Deepen <input type="checkbox"/> Production (Start/Resume) <input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing <input type="checkbox"/> Fracture Treat <input type="checkbox"/> Reclamation <input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair <input type="checkbox"/> New Construction <input type="checkbox"/> Recomplete <input checked="" type="checkbox"/> Other: <u>SUMMARY OF OPERATIONS</u>
	<input type="checkbox"/> Change Plans <input type="checkbox"/> Plug and Abandonment <input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection <input type="checkbox"/> Plug Back <input type="checkbox"/> Water Disposal

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation have been completed, and the operator has determined that the site is ready for final inspection.)

WEEKLY REPORT FOR JUNE 12, 1999 - JUNE 18, 1999

Rig up BJ frac equipment and tested lines to 8000 PSI. Held OK. Obtained injection rate and broke formation down at 6,640 PSI. Frac'd Zone #2 (7,864'-69' & 7,873'-86') with 58,600 lbs of 20/40 frac sand and 454 bbls of 30 lbs/bbl of Viking gel. Initial post frac shut-in pressure was 3,700 PSI. Opened well up and performed a forced closure flowing back 15 bbls at 1/2 BPM rate. Casing pressure declined to 3090 PSI in 1/2 hr. Opened casing to pit on a 12/64" choke with 3,090 PSI. Flowing to pit with no choke. Flowing small amount of gas. Moved in and rigged up swab rig. Began swabbing casing. Made 9 swab runs. Recovered 75 bbls water. Fluid level on first run was at 900'. Fluid level on last run was at 7,000'. Well blowing some after each run, but still died. Pulled 1,500' of gas cut fluid to get out of hole with 400' of gas cut fluid. Last run to 7,000' after waiting 1/2 hr. Pulled out of hole with no fluid. Went to 7,800' on 2 runs. On 2nd run to 7,800' pulled out of hole with sand in swab cup.

RECEIVED
 JUN 23 1999
 DIV. OF OIL, GAS & MINING

14. I hereby certify that the forgoing is true and correct Name (Printed/Typed) SUSAN H. SACHITANA	Title REGULATORY REPORTS ADMINISTRATOR
Signature <i>Susan Sachitana</i>	Date 990618

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
EXPIRES: July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instruction on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		CONFIDENTIAL	5. Lease Serial No. U-013793-A
2. Name of Operator CNG PRODUCING COMPANY			6. If Indian, Allottee or Tribe Name
3a. Address 1450 POYDRAS ST, NEW ORLEANS, LA 70112-6000		3b. Phone No. (include area code) (504) 593-7000	7. If Unit or CA/ Agreement, Name and/or No. RIVER BEND UNIT
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E		8. Well Name and No. RBU 6-23F	9. API Well No. 43-047-33087
		10. Field and Pool, or Exploratory Area NATURAL BUTTES 630	11. County or Parish, State UINTAH, UTAH


12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off	
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity	
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>SUMMARY OF OPERATIONS</u>	
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandonment	<input type="checkbox"/> Temporarily Abandon		
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal		

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomplate in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation have been completed, and the operator has determined that the site is ready for final inspection.)

WEEKLY REPORT FOR JUNE 19, 1999 - JUNE 24, 1999

Rig up Computalog. Pick up and run in hole with 4.75" gauge ring to 7,550'. No problems. Pull out of hole and pick up and run in hole with Halliburton composite bridge plug and set at 7,525'. Pull out of hole. Rig up pump truck and fill hole with 160 bbls filtered 2% KCL water and pressure test to 5000 PSI for 30 minutes. Held OK. Rig down pump truck. Pick up and run in hole with 3-3/8" gun and perforate zone #3 7,452' -7,474' with 2 SPF - 44 holes total. Pull out of hole. Rig down Computalog.



14. I hereby certify that the forgoing is true and correct Name (Printed/Typed) SUSAN H. SACHITANA	Title REGULATORY REPORTS ADMINISTRATOR
Signature <i>Susan Sachitana</i>	Date 990624

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
EXPIRES: July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instruction on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		CONFIDENTIAL	5. Lease Serial No. U-013793-A
2. Name of Operator CNG PRODUCING COMPANY			6. If Indian, Allottee or Tribe Name
3a. Address 1450 POYDRAS ST, NEW ORLEANS, LA 70112-8000		3b. Phone No. (include area code) (504) 593-7000	7. If Unit or CA/ Agreement, Name and/or No. RIVER BEND UNIT
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E			8. Well Name and No. RBU 6-23F
			9. API Well No. 43-047-33087
			10. Field and Pool, or Exploratory Area NATURAL BUTTES 630
			11. County or Parish, State UINTAH, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize <input type="checkbox"/> Deepen <input type="checkbox"/> Production (Start/Resume) <input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing <input type="checkbox"/> Fracture Treat <input type="checkbox"/> Reclamation <input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair <input type="checkbox"/> New Construction <input type="checkbox"/> Recomplete <input checked="" type="checkbox"/> Other <u>SUMMARY OF OPERATIONS</u>
	<input type="checkbox"/> Change Plans <input type="checkbox"/> Plug and Abandonment <input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection <input type="checkbox"/> Plug Back <input type="checkbox"/> Water Disposal

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation have been completed, and the operator has determined that the site is ready for final inspection.)

WEEKLY REPORT FOR JULY 1, 1999 - JULY 9, 1999

Rig up BJ frac equipment and test lines to 8,100 PSI. Tested OK. Obtained injection rate and broke formation down at 4,160 PSI. Pump 25 bbls 2% KCL water into Zone #3 and Monitor pressure for 1/2 hr. Frac'd Interval #3 (7,452'-74') with 48,294 lbs of 20/40 frac sand and 412 bbls 30# Viking gel. Initial post frac shut-in pressure was 4,000 PSI. Opened well up with 4000 PSI and performed a forced closure flowing back 15 bbls at 1/2 BPM. Casing pressure declined to 3,457 PSI in 1/2 hr. Well flowing to pit through 2" flow line with 5 PSI on well. Rig up Computalog. Pick up and run in hole with 4.75" gauge ring and set at 690'. Pull out of hole and cut 900' of line off spool and rehead. Pick up and run in hole with 4.75" gauge ring to 7,010'. No problems. Pull out of hole. Pick up and run in hole with Halliburton composite bridge plug and set at 7,000'. Pull out of hole. Rig up pump truck and fill hole with 154 bbls filtered 2% KCL and pressure test to 5,000 PSI for 30 minutes. Held OK. Rig down pump truck. Pick up and run in hole with 3-3/8" gun and perforate interval #4 (6,876'-6,886', 6,910'-6,914') with 1 SPF and 6,942'-6,960' with 2 SPF for 50 holes total. Pull out of hole. Rig down Computalog.

14. I hereby certify that the forgoing is true and correct Name (Printed/Typed) SUSAN H. SACHITANA	Title REGULATORY REPORTS ADMINISTRATOR
	Date 990709



THIS SPACE FOR FEDERAL OR STATE OFFICE USE	
Approved by Signature: <i>Susan H. Sachitana</i>	Title Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office
Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.	

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
EXPIRES: July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instruction on reverse side

CONFIDENTIAL

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. U-013793-A
2. Name of Operator CNG PRODUCING COMPANY		6. If Indian, Allottee or Tribe Name
3a. Address 1450 POYDRAS ST, NEW ORLEANS, LA 70112-8000	3b. Phone No. (include area code) (504) 593-7000	7. If Unit or CAV Agreement, Name and/or No. RIVER BEND UNIT
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E		8. Well Name and No. RBU 6-23F
		9. API Well No. 43-047-33087
		10. Field and Pool, or Exploratory Area NATURAL BUTTES 630
		11. County or Parish, State UINTAH, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize <input type="checkbox"/> Deepen <input type="checkbox"/> Production (Start/Resume) <input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing <input type="checkbox"/> Fracture Treat <input type="checkbox"/> Reclamation <input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing/Repair <input type="checkbox"/> New Construction <input type="checkbox"/> Recomplete <input checked="" type="checkbox"/> Other <u>SUMMARY OF OPERATIONS</u>
	<input type="checkbox"/> Change Plans <input type="checkbox"/> Plug and Abandonment <input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection <input type="checkbox"/> Plug Back <input type="checkbox"/> Water Disposal

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation have been completed, and the operator has determined that the site is ready for final inspection.)

WEEKLY REPORT FOR JULY 10, 1999 - JULY 16, 1999

Well flowing to pit through 2" flow line with 5 PSI on well. Rig up Computalog. Pick up and run in hole with 4.75" gauge ring and set down at 690'. Pull out of hole. Cut 900' of line off spool and rehead. Pick up and run in hole with 4.75" gauge ring to 7,010'. No problems. Pull out of hole. Pick up and run in hole with Halliburton composite bridge plug and set at 7,000'. Pull out of hole. Rig up pump truck and fill hole with 154 bbls filtered 2% KCL and pressure test to 5,000 PSI for 30 minutes. Held OK. Rig down pump truck. Pick up and run in hole with 3-3/8" gun and perforate interval #4 6,876'-6,886', 6,910'-6,914', with 1 SPF and 6,942'-6,960' with 2 SPF for 50 holes total. Pull out of hole. Rig down Computalog. Rig up BJ frac equipment and test lines to 6000 PSI. Held OK. Obtained injection rate and broke formation down at 4,870 PSI. Frac'd Zone #4 (6,876'-86', 6,910'-6,914' and 6,942'-60') with 318,086 lbs of 20/40 frac sand with 1,696 bbls of 30# Viking. Initial post frac shut in pressure was 3,360 PSI. Opened well and performed a forced closure flowing back 15 bbls at 1/2 BPM rate. Casing pressure declined to 2700 PSI in 1/2 hr. Opened casing to pit on a 12/64" choke with 2700 PSI.

RECEIVED
JUL 18 1999
DIV. OF OIL, GAS & MINING

14. I hereby certify that the forgoing is true and correct Name (Printed/Typed) SUSAN H. SACHITANA	Title REGULATORY REPORTS ADMINISTRATOR
Signature <i>Susan H. Sachitana</i>	Date 990716

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
EXPIRES: July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.
SUBMIT IN TRIPLICATE - Other instruction on reverse side

5. Lease Serial No.
U-013793-A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/ Agreement, Name and/or No.
RIVER BEND UNIT

8. Well Name and No.
RBU 6-23F

9. API Well No.
43-047-33087

10. Field and Pool, or Exploratory Area
NATURAL BUTTES 630

11. County or Parish, State
UINTAH, UTAH

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
CNG PRODUCING COMPANY

3a. Address
1450 POYDRAS ST, NEW ORLEANS, LA 70112-6000

3b. Phone No. (include area code)
(504) 593-7000

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E

CONFIDENTIAL


12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Deepen
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Production (Start/Resume)
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Alter Casing
	<input type="checkbox"/> Fracture Treat
	<input type="checkbox"/> Reclamation
	<input type="checkbox"/> Well Integrity
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Recomplete
	<input checked="" type="checkbox"/> Other: <u>SUMMARY OF OPERATIONS</u>
	<input type="checkbox"/> Change Plans
	<input type="checkbox"/> Plug and Abandonment
	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection
	<input type="checkbox"/> Plug Back
	<input type="checkbox"/> Water Disposal

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation have been completed, and the operator has determined that the site is ready for final inspection.)

WEEKLY REPORT FOR JULY 22, 1999 - JULY 23, 1999

Rig up Computalog. Pick up and run in hole with 4.75" gauge ring to 6,800'. No problems. Pull out of hole. Pick up and run in hole with Halliburton composite bridge plug and set at 6,790'. Pull out of hole. Rig down Computalog. Rig up rig and foam unit and equipment. Nipple down frac valve. Nipple up BOPE and test to 250 PSI low and 5000 PSI high. Held OK. Pick up and run in hole with 4.75" bit, bit sub with dart in place, 1 jt. 2-3/8" tubing, 1.78 "F" nipple and 214 jts. 2-3/8" tubing with end of tubing at 6,786'.



14. I hereby certify that the forgoing is true and correct

Name (Printed/Typed)
SUSAN H. SACHITANA

Signature
Susan H. Sachitana

Title
REGULATORY REPORTS ADMINISTRATOR

Date
990723

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
EXPIRES: July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instruction on reverse side

5. Lease Serial No.
U-013793-A

6. If Initial Report

CONFIDENTIAL

1. Type of Well
 Oil Well Gas Well Other

7. If Unit or CA/ Agreement, Name and/or No.
RIVER BEND UNIT

2. Name of Operator
CNG PRODUCING COMPANY

8. Well Name and No.
RBU 6-23F

3a. Address
1450 POYDRAS ST, NEW ORLEANS, LA 70112-6000

3b. Phone No. (include area code)
(504) 593-7000

9. API Well No.
43-047-33087

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E

10. Field and Pool, or Exploratory Area
NATURAL BUTTES 630

11. County or Parish, State
UINTAH, UTAH


12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>SUMMARY OF OPERATIONS</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandonment	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation have been completed, and the operator has determined that the site is ready for final inspection.)

WEEKLY REPORT FOR JULY 24, 1999 - JULY 30, 1999

Open well and broke circulate with 800 PSI and drill plug at 6,790'. Run in hole with 2-3/8" tubing and tag at 6,948'. Drill and circulate to plug at 7,000'. Drill plug. Run in hole and tag at 7,495'. Drill and circulate to plug at 7,525'. Drill plug. Run in hole and tag plug at 7,910'. Drill and circulate on plug 5-1/2 hrs. Could not make any hole. Pump 10 bbl. sweep and circulate well clean. Pull out of hole to string float and lay down float. Run in hole with 2-3/8" tubing and land tubing with 245 jts total in hole, bit and bit sub at 771', 1.78" "F" nipple at 7,680'. Nipple down stack and BOP. Nipple up wellhead and pressure test void to 5000 PSI. Held OK. Equalized tubing and casing. Rig up PLS and ran in hole with Tital 1 1/16" retrievable tubing gun and perforated tubing at 7,690'-7,691' with 4 SPF. Pull out of hole. Rig down PLS. Tried to unload tubing to tank. Well would not unload. Moved in swab rig. Made 3 swab runs. Fluid level on first run was at 2,000'. Fluid level on last run was still at 2,000'. Recovered 15.5 bbis water. Well started to flow. Put through unit with 860 PSI on tubing and 1,650 PSI on casing on a 17/64" choke. Made approximately 1200 MCF. Well returning lots of treating fluid.



14. I hereby certify that the forgoing is true and correct
Name (Printed/Typed)

SUSAN H. SACHITANA

Signature

Susan H. Sachitana

Title

REGULATORY REPORTS ADMINISTRATOR

Date

990730

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
EXPIRES: July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instruction on reverse side

5. Lease Serial No.
U-013793-A

6. If Indian, Allottee or Tribe Name

CONFIDENTIAL

7. If Unit or CA/ Agreement, Name and/or No.
RIVER BEND UNIT

8. Well Name and No.
RBU 6-23F

9. API Well No.
43-047-33087

10. Field and Pool, or Exploratory Area
NATURAL BUTTES 630

11. County or Parish, State
UINTAH, UTAH

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

CNG PRODUCING COMPANY

3a. Address

1450 POYDRAS ST, NEW ORLEANS, LA 70112-6000

3b. Phone No. (include area code)

(504) 593-7000

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)


1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other: <u>SUMMARY OF OPERATIONS</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandonment	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation have been completed, and the operator has determined that the site is ready for final inspection.)

Install telemetry and plunger lift equipment. Operate plunger with laptop computer on location. Well on plunger.



14. I hereby certify that the forgoing is true and correct
Name (Printed/Typed)

SUSAN H. SACHITANA

Signature

Susan Sachitana

Title

REGULATORY REPORTS ADMINISTRATOR

Date

990802

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

CNG Tower
1450 Poydras Street
New Orleans, LA 70112-6000
(504) 593-7000

August 12, 1999

CONFIDENTIAL

Ms. Vicki Dyson
Utah Board of Oil, Gas & Mining
1594 West North Temple
Suite 1210
Salt Lake City , Utah 84114-5801

RE: Open Hole Logs
RBU 6-23F Sec. 23-T10S-R20E 43-047-33087

Dear Ms. Dyson:

Enclosed please find one (1) copy of open hole logs for the above referenced wells. The logs are being sent to you per State requirements.

If you have any questions or need any additional information, please feel free to contact me at (504) 593-7260.

Sincerely,

CNG PRODUCING COMPANY

Susan H. Sachitana

Susan H. Sachitana
Regulatory Reports Administrator

cc: Nelda Decker
Tom Auld
David Linger
Mitch Hall

**CNG Producing
Company**

A **CNG** COMPANY

CNG Title
1400 W. 10th Street
Vernal, Utah 84057-1000
(801) 233-7777

August 12, 1999

Mr. Wayne Bankert
U.S. Dept. of the Interior
Bureau of Land Management
Vernal District Office
170 South 500 East
Vernal, UT 84078

RE: Well Completion Report
RBU 2-14E Sec. 14-T10S-R19E
RBU 6-23F Sec. 23-T10S-R20E
RBU 7-11F Sec. 11-T10S-R20E

Dear Wayne:

Enclosed please find an original and two copies of the above referenced reports. Please note that I have included the subsequent sundry for the RBU 7-11F since it was a workover.

CNG Producing Company is requesting all information be held confidential.

Should you have any question please feel free to contact either myself at (504) 593-7260 or our project engineer, Ralph Hamrick at (281) 873-1562.

Sincerely,


CNG PRODUCING COMPANY




Susan H. Sachitana
Regulatory Reports Administrator

Enclosure

cc: Utah Department of Oil, Gas & Mining
T. Auld
D. Thomas
N. Decker
M. Hall
D. Hipkiss
S. Howard
M. O'Donnell
A. Burnside
Y. Wang
R. Hamrick
D. Linger
RBU Well Files



UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT



FORM APPROVED
OMB NO. 1004-0137

CONFIDENTIAL

Expires: February 28, 1995

5. LEASE DESIGNATION AND SERIAL NO.

U-013793-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME
RIVERBEND UNIT

8. FARM OR LEASE NAME, WELL NO.

RBU 6-23F

9. API WELL NO.

43-047-33087

10. FIELD AND POOL, OR WILDCAT
NATURAL BUTTES 630

11. SEC., T., R., M., OR BLOCK AND SURVEY
OR AREA

SE NW of Sec. 23-T10S-R20E

WELL COMPLETION OR RECOMPLETION REPORT AND LOG
DIV. OF OIL, GAS & MINING

1a. TYPE OF WELL: OIL WELL GAS WELL DRY Other

1b. TYPE OF COMPLETION: NEW WORK DEEP- PLUG DIFF. WELL OVER EN BACK RESVR. Other

2. NAME OF OPERATOR
CNG Producing Company

3. ADDRESS AND TELEPHONE NO. Contact Person: Sue Sachitana
CNG Tower - 1450 Poydras St., New Orleans, LA 70112-6000 (504) 593-7260

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)*
At surface 1,752.2' FWL & 1,522.4' FNL of Sec. 23-T10S-R20E

At top prod. interval reported below

At total depth

CONFIDENTIAL

14. PERMIT NO. 43-047-33087 DATE ISSUED 01/06/99
12. COUNTY OR PARISH UINTAH 13. STATE UTAH

15. DATE SPUDDED 04/19/1999 16. DATE T.D. REACHED 05/05/99 17. DATE COMPL. (Ready to prod.) 7/28/99 18. ELEVATIONS (DF, RKB, RT, GR, ETC.)* 5,007.8' 19. ELEV. CASINGHEAD

20. TOTAL DEPTH, MD & TVD 8,200' 21. PLUG, BACK T.D., MD & TVD 7,910' 22. IF MULTIPLE COMPL., HOW MANY* 4 Zones 23. INTERVALS DRILLED BY ROTARY TOOLS ROTARY CABLE TOOLS

24. PRODUCING INTERVAL(S), OF THIS COMPLETION - TOP, BOTTOM, NAME (MD AND TVD)*
7,959'-64', 7,970'-72', 7,999'-8,001', 8,012'-14', 8,022'-26', 8,054'-56', 8,080'-92', 7,864'-69', 7,873'-86', 7,452'-74', 6,876'-86' SURVEY MADE
6,910'-14', 6,942'-60' & 7,690'-91' (tubing) - MUD LOG 8/30/99/CHD

25. WAS DIRECTIONAL NO
26. TYPE ELECTRIC AND OTHER LOGS RUN DIL, FDC-CNL, MUD LOG 8-15-99 27. WAS WELL CORED NO

28. CASING RECORD (Report all strings set in well)				AMOUNT PULLED	
CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENT RECORD	
13 3/8"		97'	17 1/2"	2 yards sand grout	
8 5/8"	32# & 24#	2,980'	12 1/4"	500 sks of Poz	
5 1/2" N-80	17#	8,162'		206 sks lead & 890 sks tail class G cement	

29. LINER RECORD				30. TUBING RECORD		
SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)
					2 7/8'	7,715'

31. PERFORATION RECORD (Interval, size and number)		32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.	
ZONE	INTERVAL	DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
ZONE #1	7,959'-64', 7,970'-72', 7,999'-8,001', 8,012'-14', 8,022'-26', 8,054'-56' & 8,080'-92'	ZONE #1	57,944 lbs of 20/40 frac sand & 454 bbls of 30# Vistar
ZONE #2	7,864'-69' & 7,873'-86'	ZONE #2	58,600 lbs of 20/40 frac sand & 454 bbls of 30# Viking
ZONE #3	7,452'-74'	ZONE #3	48,294 lbs of 20/40 frac sand & 412 bbls of 30# Viking
ZONE #4	6,876'-86', 6,910'-14', & 6,942'-60'	ZONE #4	318,086 lbs of 20/40 frac sand & 1,696 bbls of 30# Viking
ZONE #5	7,690'-91' (tubing)		

33. DATE FIRST PRODUCTION 07/14/1999 PRODUCTION METHOD (Flowing, gas lift, pumping - size and type of pump) FLOWING WELL STATUS (Producing or shut-in) PRODUCING

DATE OF TEST	HOURS TESTED	CHOKE SIZE	PROD'N FOR TEST PERIOD	OIL-BBL.	GAS-MCF.	WATER-BBL.	GAS-OIL RATIO
07/28/1999	24	14/64"		0	1,086	78 (treating fluid)	
FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24 HOUR RATE		OIL-BBL.	GAS-MCF.	WATER-BBL.	OIL GRAVITY-ALL
1,060	1,260			0	1,086	78 (treating fluid)	

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.) SOLD TEST WITNESSED BY JAMES SWEAT

35. LIST OF ATTACHMENTS

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records.

SIGNED Ralph Hamrick / Ahs TITLE PRODUCTION ENGINEER DATE 08/12/99
RALPH HAMRICK

(See Instruction and Spaces for Additional Data on Reverse Side)

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

CONFIDENTIAL PERIOD EXPIRED
ON 8-28-00

C PRODUCING COMPANY

RIVERBEND UNIT 06-23F

SPUD: 4/19/99

COMPLETED:

SEC: 23, T: 10S, R: 20E

WORKED OVER:

API: 43-047-33087


Dated: July 30, 1999

PRESENT

PROPOSED

**NOTE: Unless Stated All Depths are Measured.
NOT DRAWN TO SCALE.**

CONFIDENTIAL

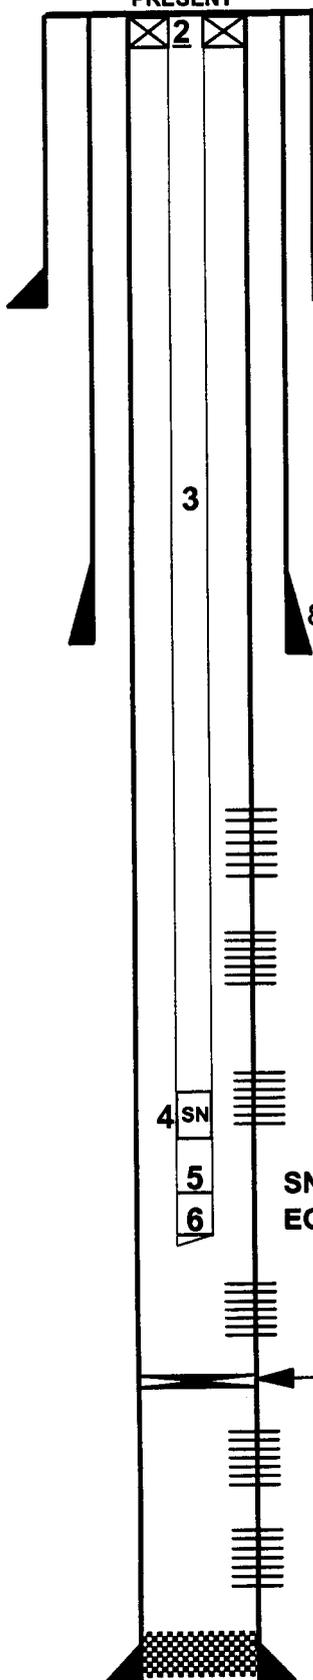

13-3/8" @ 97'

1. KB
2. Tbg Hanger 2-3/8" top & bottom
3. 244 jts 2-3/8" tbg
4. "F"Nipple @ 7680.08
5. 1 jt 2-3/8" tbg
6. Bit Sub & 4-3/4" bit
7. Could not drill past 7910'
Halliburton 5-1/2" Frac plug?

8-5/8" 24# & 32# 8rd @ 2980' w/ 500 sx POZ cmt.

Interval # 5

Perf: 7690' - 7691' 4 SPF 4 Holes 7/26/99

Test: 24 hrs 1128 MCFD, 78 BWPD @ 1060 FTP, 1260 CP, 353 LP on 14/64 ck. 7/28/99

Interval # 4

Perfs: 6876' - 6886', 6910'-6914', 6942'-6960' 2 SPF 50 Holes 7/8/99

Frac: w/ 318,086# 20/40 proppant, 1696 bbls 30# Viking @ 34.8 bpm. 7/12/99

Test: 24 hrs 51 MCFD, 60 CP on 12/64 ck 7/13/99

Interval # 3

Perf: 7452' - 7474' 2 SPF 44 Holes 6/18/99

Frac: w/ 48,294# 20/40 proppant, 412 bbls 30# Viking @ 30 bpm. 7/1/99

Test: 24 hrs 469 MCFD 550 CP on 12/64 ck 7/2/99

SN @ 7680'

EOT @ 7715'

Interval # 2

Perf: 7864-7869', 7873 - 7886' 2 SPF 36 Holes 6/10/99

Frac: w/ 58,600# 20/40 proppant, 454 bbls fluid 6/11/99

Could not drill past 7910' Halliburton 5-1/2" Frac Plug?

Interval # 1

Perf: 7959'-7964' 1 SPF 5 Holes 5/25/99

Interval # 1A

Perf: 7970-7972', 7999-8001', 8012-8014', 8022-8026', 8054-8056' 2 SPF 36 Holes

8,080'-8,092' 1 SPF 5/25/99

Frac Interval #1 & 1A

w/ 57,944# 20/40 Mesh, 454 bbls Vistar @ 40 bpm 6/1/99

Test: 24 hrs 673 MCFD, 325 CP on 18/64 ck 6/3/99

5-1/2" 17# N-80 8rd @ 8162' Cmt'd w/ 1096 sx Class "G".

TD 8,200'



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

In Reply Refer To:
3100
U-01470-A et al
(UT-932)

JUN 2 2000

NOTICE

Dominion Exploration & Production, Inc. : Oil and Gas Leases
1450 Poydras Street :
New Orleans, LA 70112-6000 :

Name Change Recognized

Acceptable evidence has been received in this office concerning the change of name of CNG Producing Company to Dominion Exploration & Production, Inc. on Federal oil and gas leases.

The oil and gas lease files identified on the enclosed exhibit have been noted as to the name change. The exhibit was compiled from your list of leases and a list of leases obtained from our automated records system. We have not abstracted the lease files to determine if the entity affected by the name change holds an interest in the leases identified nor have we attempted to identify leases where the entity is the operator on the ground maintaining no vested record title or operating rights interests. We are notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the name change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

The following lease on your list is closed on the records of this office: U-029277.

Due to the name change, the name of the principal on the bond is required to be changed from CNG Producing Company to Dominion Exploration & Production, Inc. on Bond No. 524 7050 (BLM Bond No. WY1898). You may accomplish this name change either by consent of the surety on the original bond or by a rider to the original bond. Otherwise, a replacement bond with the new name should be furnished to the Wyoming State Office.

/s/ Robert Lopez

Robert Lopez
Chief, Branch of
Minerals Adjudication

Enclosure
Exhibit of Leases

RECEIVED

JUN 05 2000

DIVISION OF
OIL, GAS AND MINERAL

cc: Wyoming State Office
New Mexico State Office
Moab Field Office
Vernal Field Office
MMS–Reference Data Branch, MS 3130, Box 5860, Denver, CO 80217
State of Utah, DOGM, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC, UT 84114-5801
Irene Anderson (UT-932)
Teresa Thompson (UT-931)
LaVerne Steah (UT-942)

STATE OF UTAH
DIVISION OF OIL, GAS & MINING

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, deepen existing wells or to reenter plugged and abandoned wells.
Use APPLICATION FOR PERMIT TO DRILL OR DEEPEN form for such proposals.

1. Type of Well : OIL <input type="checkbox"/> GAS <input type="checkbox"/> OTHER: _____	5. Lease Designation and Serial Number: VARIOUS
2. Name of Operator: DOMINION EXPLORATION & PRODUCTION, INC.	6. If Indian, Allottee or Tribe Name:
3. Address and Telephone Number: 1460 Poydras Street, New Orleans, LA 70112-6000 (504) 593-7260	7. Unit Agreement Name:
4. Location of Well Footages: QQ, Sec. T., R., M.:	8. Well Name and Number: VARIOUS
	9. API Well Number
	10. Field and Pool, or Wildcat: Natural Buttes 630
	County: UINTAH State: UTAH


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA	
NOTICE OF INTENT (SUBMIT IN DUPLICATE)	SUBSEQUENT REPORT (Submit Original Form Only)
<input type="checkbox"/> Abandon <input type="checkbox"/> Repair Casing <input type="checkbox"/> Change of Plans <input type="checkbox"/> Convert to Injection <input type="checkbox"/> Fracture Treat or Acidize <input type="checkbox"/> Multiple Completion <input type="checkbox"/> Other _____	<input type="checkbox"/> Abandon* <input type="checkbox"/> Repair Casing <input type="checkbox"/> Change of Plans <input type="checkbox"/> Convert to Injection <input type="checkbox"/> Fracture Treat or Acidize <input checked="" type="checkbox"/> Other <u>OPERATOR NAME CHANGE FOR WELLS</u> Date of work completion _____ <small>Report results of Multiple Completion and Recompletion to different reservoirs on WELL COMPLETION OR RECOMPLETION REPORT AND LOG form.</small> <small>*Must be accompanied by a cement verification report.</small>
<input type="checkbox"/> New Construction <input type="checkbox"/> Pull or Alter Casing <input type="checkbox"/> Recomplete <input type="checkbox"/> Reperforate <input type="checkbox"/> Vent or Flare <input type="checkbox"/> Water Shut-Off	<input type="checkbox"/> New Construction <input type="checkbox"/> Pull or Alter Casing <input type="checkbox"/> Reperforate <input type="checkbox"/> Vent or Flare <input type="checkbox"/> Water Shut-Off
Approximate date work will start _____	

12. DESCRIBE PROPOSED OR COMPLETION OPERATIONS (Clearly State all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Please be advised that effective April 12, 2000, CNG Producing Company has changed its name to Dominion Exploration & Production, Inc. and would like to transfer the well permits into the name of Dominion Exploration & Production, Inc. Our new bond has been filed and is pending approval with the State of Utah. The bond number is 76S 63050 361.


John R. Lewis
Sr. Vice-President - CNG Producing Company

RECEIVED
JUN 29 2000
DIVISION OF
OIL, GAS AND MINING

13. Name & Signature:  Title: Sr. Vice-President - Dominion Expl. & Prod., Inc. Date: June 26, 2000

(This space for State use only)

Dominion Exploration & Production, Inc.
1450 Poydras Street, New Orleans, LA 70112-6000
Phone: 504-593-7000



June 27, 2000

Mr. Jimmy Thompson
Utah Board of Oil Gas & Mining
1594 West North Temple
Suite 1210
Salt Lake City, UT 84114-5801

RE: Name Change Documentation for CNG Producing Company

Dear Mr. Thompson:

CNG Producing Company has become Dominion Exploration & Production, Inc. effective April 12, 2000. Enclosed please find a sundry regarding the name change with an attached listing of all the permits in the name of CNG Producing Company to be changed to Dominion Exploration & Production, Inc. Also enclosed please find a Form UIC 5 for the Transfer of Authority to Inject for the Federal #1-26B well.

If you have any questions or require any additional information, please contact me at (504) 593-7260.

Sincerely,

DOMINION EXPLORATION & PRODUCTION, INC.

Susan H. Sachitana
Regulatory Reports Administrator

Enclosure

cc: Nelda Decker

RECEIVED

JUN 29 2000

**DIVISION OF
OIL, GAS AND MINING**



State of Utah
DEPARTMENT OF COMMERCE
Division of Corporations & Commercial Code

552894
CO 106990
File Number

Table with 2 columns: Check Appropriate Box, Fee Amount. Rows include Foreign Profit Corporation (\$35.00), Foreign Non-Profit Corporation (\$35.00), Foreign Limited Partnership (\$25.00), Foreign Limited Liability Company (\$35.00).

Application To Amend The
CERTIFICATE OF AUTHORITY OR
REGISTRATION of

CNG Producing Company
Business Entity Name

Delaware
Name of Home State

I. AMENDING THE BUSINESS NAME

The business name is changed to: Dominion Exploration & Production, Inc.
The corporation shall use as its name in Utah: Dominion Exploration & Production, Inc.

(The corporation shall use its name as set forth on #1, unless this name is not available)

NOTE: If the business name has changed its name in the home state, a copy of the Certificate of Amendment or a certified copy of the amendment must accompany this application.

Check the following:

- [X] The name of the corporation is changing its name in Utah to the new name of the corporation in the home state.
[] The name of the corporation is being changed in Utah to comply with Utah State Insurance Regulations.

II. AMENDING THE DURATION OF THE BUSINESS EXISTENCE

The businesses period of duration is changed to:

III. AMENDING THE STATE OR COUNTRY OF INCORPORATION/REGISTRATION

The corporation's state or country of incorporation/registration is changed to:

IV. Other:
(Limited Partnership changing General Partners, Limited Companies changing Members or Managers. Change of statement who is managing, etc.)
Use an attached sheet if needed.

Under penalties of perjury, I declare this Application to Amend the Certificate of Authority or Registration to be, to the best of my knowledge and belief, true and correct.

Signature: [Handwritten Signature] Title: Vice President & Corporate Secretary Date: April 20, 2000

Department of Commerce
Division of Corporations and Commercial Code

I hereby certify that the foregoing has been filed and approved on this 25 day of April 2000 in the office of this Division and hereby issue this Certificate thereof.

Examiner: [Signature] Date: 4/25/00



CHRISTOPHER JENSEN
Director

Date: 04/25/2000

Receipt Number: 22156

Amount Paid: \$60.00

STATE OF UTAH
DIVISION OF CORPORATIONS
AND COMMERCIAL CODE
160 East 300 South / Box 146705
Salt Lake City, UT 84114-6705
Service Center: (801) 530-4849
Web Site: http://www.commerce.state.ut.us

FILED

APR 25 2000

**EXHIBIT A
OIL & GAS LEASES AFFECTED BY THE NAME CHANGE**

U-01470-A	U-017713	U-46825
U-01790	U-035316	U-62232
U-02896-A	U-037164	UTU-66743
U-03505	U-0143519	UTU-68108
U-03576	U-0143520-A	UTU-68388
U-013429-A	U-0143521-A	UTU-68625
U-013765	U-0147541	UTU-69166
U-013766	U-0147541-A	UTU-73011
U-013767	U-3405	UTU-73433
U-013769	U-7206	UTU-76499
U-013769-A	U-9803	UTU-76500
U-013769-B	U-10291	UTU-76717
U-013769-C	U-16544	UTU-76718
U-013792	U-19266	
U-013793	U-28203	U-60759 (CA)
U-013793-A	U-29784	U-60940 (CA)
U-013794	U-30693	UTU-77360 (CA)
U-013818-A	U-37246	U-63054X (River Bend)
U-013820	U-39221	UTU-73218X
U-013821-A	U-43156	(West Willow Creek Unit)

api	well_name	well_status_main	lease_num
4304732111	RBU 7-15F	LA	14-20-H62-2645
4304732189	RBU 13-10F	P	14-20-H62-2645
4304730768	RBU 7-22F	P	14-20-H62-2646
4304732109	RBU 15-15F	LA	14-20-H62-2646
4304732844	RBU 15-15F	P	14-20-H62-2646
4304732269	RBU 4-15F	PA	INDIAN
4304733360	RBU 1-16F	DRL	ML-3393
4304731980	STATE 2-36E	LA	ML-42175
4304731801	RIVER BEND U 2-10D	S	U-013429-A
4304731551	RBU 10X-15E	PA	U-013760
4304731716	RIVER BEND U 7-13E	LA	U-013765
4304731718	RBU 15-13E	LA	U-013765
4304732600	RBU 1-21EO	P	U-013766
4304733033	RBU 7-23E	P	U-013766
4304733160	RBU 8-15E	P	U-013766
4304733272	RBU 13-3F	P	U-013767
4304733366	RBU 5-18F	P	U-013769
4304732991	RBU 6-19F	P	U-013769-A
4304733157	RBU 7-19F	P	U-013769-A
4304732454	RBU 9-14EO	P	U-013792
4304732514	RBU 8-14EO	LA	U-013792
4304732678	RBU 13-22EO	LA	U-013792
4304732989	RBU 13-10E	P	U-013792
4304733156	RBU 4-14E	P	U-013792
4304733161	RBU 16-10E	P	U-013792
4304733194	RBU 2-14E	P	U-013792
4304733365	RBU 12-14E	P	U-013792
4304732990	RBU 13-18F2	P	U-013793
4304732396	RBU 3-21F	P	U-013793-A
4304732407	RBU 15-14F	P	U-013793-A
4304732408	RBU 4-23F	P	U-013793-A
4304732899	RBU 3-14F	P	U-013793-A
4304732900	RBU 8-23F	P	U-013793-A
4304732972	RBU 1-21F	P	U-013793-A
4304733087	RBU 6-23F	P	U-013793-A
4304733158	RBU 7-20F	P	U-013793-A
4304733424	RBU 5-20F	P	U-013793-A
4304732392	RBU 11-14F	P	U-013793A
4304731719	RBU 5-24E	LA	U-013794
4304732483	RBU 5-24EO	P	U-013794
4304733034	RBU 9-18F	P	U-013794
4304733159	RBU 7-24E	P	U-013794
4304731352	RBU 16-3D	P	U-013820
4304733599	RBU 1-1D	APD	U-013820
4304733090	RBU 11-22F	P	U-0143519
4304733089	RBU 8-22F	P	U-0143521
4304732901	RBU 12-23F	P	U-01470-A
4304733091	RBU 16-22F	P	U-01470-A
4304733368	RBU 14-23F	P	U-01470-A
4304731138	RBU 11-34B	P	U-017713
4304731724	RBU 11-35B	S	U-017713
4304732094	RBU 13-35B	P	U-017713
4304732222	RBU 15-35B	S	U-017713
4304730585	RBU 7-11F	P	U-01790
4304732512	RBU 8-11F	P	U-01790
4304731739	RBU 9-9E	P	U-03505
4304732415	RBU 3-10EX (RIG SKID)	P	U-035316
4304733035	RBU 14-19F	P	U-13769-A
4304731881	APACHE 12-25	S	U-3405
4304732417	FEDERAL 3-25B	P	U-39221
4304731782	SADDLE TREE DRAW 13-34	LA	U-57598
4304732934	RBU 3-10F	P	U-7206
4304732969	RBU 11-10F	P	U-7206
4304732970	RBU 12-15F	P	U-7206
4304732971	RBU 15-16F	P	U-7206

1-CDW	4-KAS ✓
2-CDW ✓	5-CDW ✓
3-JLT	6-FILE

OPERATOR CHANGE WORKSHEET

Check each listed item when completed. Write N/A if item is not applicable.

Change of Operator (Well Sold) Designation of Agent
X Operator Name Change Only Merger

The operator of the well(s) listed below has changed, effective: 4-12-00

TO:(New Operator) DOMINION EXPL & PROD INC.
 Address: 1450 POYDRAS STREET
NEW ORLEANS, LA 70112-6000
 Phone: 1-(504)-593-7000
 Account No. N1095

FROM:(Old Operator) CNG PRODUCING COMPANY
 Address: 1450 POYDRAS STREET
NEW ORLEANS, LA 70112-6000
 Phone: 1-(504)-593-7000
 Account No. N0605

WELL(S):	CA Nos.	or	RIVER BEND	Unit
Name: <u>RBU 1-21F</u>	API: <u>43-047-32972</u>	Entity: <u>7050</u>	<u>S 21 T 10S R 20E</u>	Lease: <u>U-013793-A</u>
Name: <u>RBU 6-23F</u>	API: <u>43-047-33087</u>	Entity: <u>7050</u>	<u>S 23 T 10S R 20E</u>	Lease: <u>U-013793-A</u>
Name: <u>RBU 5-20F</u>	API: <u>43-047-33424</u>	Entity: <u>7050</u>	<u>S 20 T 10S R 20E</u>	Lease: <u>U-013793-A</u>
Name: <u>RBU 11-14F</u>	API: <u>43-047-32392</u>	Entity: <u>7050</u>	<u>S 14 T 10S R 20E</u>	Lease: <u>U-013793-A</u>
Name: <u>RBU 9-18F</u>	API: <u>43-047-33034</u>	Entity: <u>7050</u>	<u>S 18 T 10S R 20E</u>	Lease: <u>U-013794</u>
Name: <u>RBU 7-24E</u>	API: <u>43-047-33159</u>	Entity: <u>7050</u>	<u>S 24 T 10S R 19E</u>	Lease: <u>U-013794</u>
Name: <u>RBU 16-3D</u>	API: <u>43-047-31352</u>	Entity: <u>7070</u>	<u>S 03 T 10S R 18E</u>	Lease: <u>U-013820</u>
Name: <u>RBU 11-22F</u>	API: <u>43-047-33090</u>	Entity: <u>7050</u>	<u>S 22 T 10S R 20E</u>	Lease: <u>U-0143519</u>
Name: <u>RBU 8-22F</u>	API: <u>43-047-33089</u>	Entity: <u>7050</u>	<u>S 22 T 10S R 20E</u>	Lease: <u>U-0143521</u>
Name: <u>RBU 12-23F</u>	API: <u>43-047-32901</u>	Entity: <u>7050</u>	<u>S 23 T 10S R 20E</u>	Lease: <u>U-01470-A</u>
Name: <u>RBU 16-22F</u>	API: <u>43-047-33091</u>	Entity: <u>7050</u>	<u>S 22 T 10S R 20E</u>	Lease: <u>U-01470-A</u>
Name: <u>RBU 14-23F</u>	API: <u>43-047-33368</u>	Entity: <u>7050</u>	<u>S 23 T 10S R 20E</u>	Lease: <u>U-01470-A</u>
Name: <u>RBU 8-11F</u>	API: <u>43-047-32512</u>	Entity: <u>7050</u>	<u>S 11 T 10S R 20E</u>	Lease: <u>U-01790</u>
Name: <u>RBU 9-9E</u>	API: <u>43-047-31739</u>	Entity: <u>7050</u>	<u>S 09 T 10S R 19E</u>	Lease: <u>U-03505</u>
Name: <u>RBU 3-10EX</u>	API: <u>43-047-32415</u>	Entity: <u>7050</u>	<u>S 10 T 10S R 19E</u>	Lease: <u>U-035316</u>
Name: <u>RBU 14-19F</u>	API: <u>43-047-33035</u>	Entity: <u>7050</u>	<u>S 19 T 10S R 20E</u>	Lease: <u>U-13769-A</u>
Name: <u>RBU 3-10F</u>	API: <u>43-047-32934</u>	Entity: <u>7050</u>	<u>S 10 T 10S R 20E</u>	Lease: <u>U-7206</u>
Name: <u>RBU 11-10F</u>	API: <u>43-047-32969</u>	Entity: <u>7050</u>	<u>S 10 T 10S R 20E</u>	Lease: <u>U-7206</u>
Name: <u>RBU 12-15F</u>	API: <u>43-047-32970</u>	Entity: <u>7050</u>	<u>S 15 T 10S R 20E</u>	Lease: <u>U-7206</u>
Name: <u>RBU 15-16F</u>	API: <u>43-047-32971</u>	Entity: <u>7050</u>	<u>S 16 T 10S R 20E</u>	Lease: <u>U-7206</u>

OPERATOR CHANGE DOCUMENTATION

- YES 1. A pending operator change file has been set up.
- YES 2. (R649-8-10) Sundry or other legal documentation has been received from the **FORMER** operator on 6-29-00.
- YES 3. (R649-8-10) Sundry or other legal documentation has been received from the **NEW** operator on 6-29-00.
- YES 4. The new company has been looked up in the **Department of Commerce, Division of Corporations Database** if the new operator above is not currently operating any wells in Utah. Is the operator registered with the State? **Yes/No** If yes, the company file number is SEE ATTACHED. If no, Division letter was mailed to the new operator on _____.

- YES 5. **Federal and Indian Lease Wells.** The BLM or the BIA has approved the merger, name change or operator change for all wells listed above involving Federal or Indian leases on 6-2-00.
- N/A 6. **Federal and Indian Units.** The BLM or the BIA has approved the successor of unit operator for all wells listed above involving unit operations on _____.
- N/A 7. **Federal and Indian Communitization Agreements ("CA").** The BLM or the BIA has approved the operator change for all wells listed above involved in the CA on _____.
- N/A 8. **Underground Injection Control ("UIC") Program.** The Division has approved UIC Form 5, Transfer of Authority to Inject, for the enhanced/secondary recovery unit/project and/or for the water disposal well(s) listed above.
- YES 9. Changes have been entered in the **Oil and Gas Information System** for each well listed on 8-1-00.
- YES 10. Changes have been included on the **Monthly Operator Change letter** on 8-1-00.

STATE BOND VERIFICATION

N/A 1. State Well(s) covered by Bond No. _____.

FEE WELLS - BOND VERIFICATION / LEASE INTEREST OWNER NOTIFICATION

- N/A 1. (R649-3-1) The **NEW** operator of any fee lease well(s) listed above has furnished a proper bond.
- N/A 2. A **copy of this form** has been placed in the **new and former operator's bond files** on _____.
- N/A 3. The **FORMER** operator has requested a release of liability from their bond as of today's date _____? If yes, Division response was made to this request by letter dated _____. (see bond file).
- N/A 4. (R649-2-10) The **Former** operator of any Fee lease wells listed above has been contacted and informed by letter dated _____, of their responsibility to notify all interest owners of this change.
- N/A 5. Bond information added to **RBDMS** on _____.
- N/A 6. Fee wells attached to bond in **RBDMS** on _____.

FILMING

____ 1. All attachments to this form have been **microfilmed** on 2-23-01.

FILING

- ____ 1. **Originals/Copies** of all attachments pertaining to each individual well have been filed in each **well file**.
- ____ 2. The **original of this form** has been filed in the operator file and a copy in the old operator file.

COMMENTS

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING
1. DJJ
2. CDW

X - Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

7/1/2007

FROM: (Old Operator): N1095-Dominion Exploration & Production, Inc 14000 Quail Springs Parkway, Suite 600 Oklahoma City, OK 73134 Phone: 1 (405) 749-1300	TO: (New Operator): N2615-XTO Energy Inc 810 Houston St Fort Worth, TX 76102 Phone: 1 (817) 870-2800
--	--

WELL NAME	CA No.	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
SEE ATTACHED LIST									

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 8/6/2007
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 8/6/2007
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 8/6/2007
- a. Is the new operator registered in the State of Utah: Business Number: 5655506-0143
- b. If **NO**, the operator was contacted on: _____
- a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- b. Inspections of LA PA state/fee well sites complete on: n/a
- c. Reports current for Production/Disposition & Sundries on: ok
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM BIA
- Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: _____
- Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: _____
- Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: _____

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 9/27/2007
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 9/27/2007
- Bond information entered in RBDMS on: 9/27/2007
- Fee/State wells attached to bond in RBDMS on: 9/27/2007
- Injection Projects to new operator in RBDMS on: 9/27/2007
- Receipt of Acceptance of Drilling Procedures for APD/New on: 9/27/2007

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: UTB000138
- Indian well(s) covered by Bond Number: n/a
- a. (R649-3-1) The **NEW** operator of any state/fee well(s) listed covered by Bond Number 104312762
- b. The **FORMER** operator has requested a release of liability from their bond on: 1/23/2008
The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **NEW** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: _____

COMMENTS:

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

		5. LEASE DESIGNATION AND SERIAL NUMBER:
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		8. WELL NAME and NUMBER: SEE ATTACHED
2. NAME OF OPERATOR: XTO Energy Inc. N2615		9. API NUMBER: SEE ATTACHED
3. ADDRESS OF OPERATOR: 810 Houston Street CITY Fort Worth STATE TX ZIP 76102		10. FIELD AND POOL, OR WILDCAT: Natural Buttes
4. LOCATION OF WELL FOOTAGES AT SURFACE: SEE ATTACHED		COUNTY: Uintah
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Effective July 1, 2007, XTO Energy Inc. has purchased the wells listed on the attachment from:

Dominion Exploration & Production, Inc.
14000 Quail Springs Parkway, Suite 600 **N1095**
Oklahoma City, OK 73134

James D. Abercrombie (405) 749-1300
James D. Abercrombie
Sr. Vice President, General Manager - Western Business Unit

Please be advised that XTO Energy Inc. is considered to be the operator on the attached list and is responsible under the terms and conditions of the lease for the operations conducted upon the lease lands. Bond coverage is provided by Nationwide BLM Bond #104312750 and Department of Natural Resources Bond #104312762.

NAME (PLEASE PRINT) <u>Edwin S. Ryan, Jr.</u>	TITLE <u>Sr. Vice President - Land Administration</u>
SIGNATURE <u><i>Edwin S. Ryan, Jr.</i></u>	DATE <u>7/31/2007</u>

(This space for State use only)

APPROVED 9127107

Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

(See Instructions on Reverse Side)

RECEIVED

AUG 06 2007

DIV. OF OIL, GAS & MINING

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

RIVER BEND UNIT

api	well_name	qtr	qtr	sec	twp	rng	lease_num	entity	Lease	well	stat
4304730087	OSCU 2	NWSE	03	100S	200E	U-037164	7050	Federal	GW	P	
4304730266	RBU 11-18F	NESW	18	100S	200E	U-013793	7050	Federal	GW	P	
4304730374	RBU 11-13E	NESW	13	100S	190E	U-013765	7050	Federal	GW	P	
4304730375	RBU 11-15F	NESW	15	100S	200E	U-7206	7050	Federal	GW	P	
4304730376	RBU 7-21F	SWNE	21	100S	200E	U-013793-A	7050	Federal	GW	P	
4304730405	RBU 11-19F	NESW	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304730408	RBU 11-10E	NESW	10	100S	190E	U-013792	7050	Federal	GW	P	
4304730410	RBU 11-14E	NESW	14	100S	190E	U-013792	7050	Federal	GW	P	
4304730411	RBU 11-23E	NESW	23	100S	190E	U-013766	7050	Federal	GW	P	
4304730412	RBU 11-16F	NESW	16	100S	200E	U-7206	7050	Federal	GW	P	
4304730585	RBU 7-11F	SWNE	11	100S	200E	U-01790	7050	Federal	GW	P	
4304730689	RBU 11-3F	NESW	03	100S	200E	U-013767	7050	Federal	GW	P	
4304730720	RBU 7-3E	SWNE	03	100S	190E	U-013765	7050	Federal	GW	P	
4304730759	RBU 11-24E	NESW	24	100S	190E	U-013794	7050	Federal	GW	P	
4304730761	RBU 7-10F	SWNE	10	100S	200E	U-7206	7050	Federal	GW	P	
4304730762	RBU 6-20F	SENE	20	100S	200E	U-013793-A	7050	Federal	GW	P	
4304730768	RBU 7-22F	SWNE	22	100S	200E	14-20-H62-2646	7050	Indian	GW	P	
4304730887	RBU 16-3F	SESE	03	100S	200E	U-037164	7050	Federal	GW	P	
4304730915	RBU 1-15E	NENE	15	100S	190E	U-013766	7050	Federal	GW	P	
4304730926	RBU 1-14E	NENE	14	100S	190E	U-013792	7050	Federal	GW	P	
4304730927	RBU 1-22E	NENE	22	100S	190E	U-013792	7050	Federal	GW	P	
4304730970	RBU 1-23E	NENE	23	100S	190E	U-013766	7050	Federal	GW	P	
4304730971	RBU 4-19F	NWNW	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304730973	RBU 13-11F	SWSW	11	100S	200E	U-7206	7050	Federal	WD	A	
4304731046	RBU 1-10E	NWNE	10	100S	190E	U-013792	7050	Federal	GW	S	
4304731115	RBU 16-16F	SESE	16	100S	200E	U-7206	7050	Federal	GW	P	
4304731140	RBU 12-18F	NWSW	18	100S	200E	U-013793	7050	Federal	GW	P	
4304731141	RBU 3-24E	NENW	24	100S	190E	U-013794	7050	Federal	GW	P	
4304731143	RBU 3-23E	NENW	23	100S	190E	U-013766	7050	Federal	GW	P	
4304731144	RBU 9-23E	NESE	23	100S	190E	U-013766	7050	Federal	GW	P	
4304731145	RBU 9-14E	NESE	14	100S	190E	U-013792	7050	Federal	GW	P	
4304731160	RBU 3-15E	NENW	15	100S	190E	U-013766	7050	Federal	GW	P	
4304731161	RBU 10-15E	NWSE	15	100S	190E	U-013766	7050	Federal	GW	P	
4304731176	RBU 9-10E	NESE	10	100S	190E	U-013792	7050	Federal	GW	P	
4304731196	RBU 3-14E	SENE	14	100S	190E	U-013792	7050	Federal	GW	P	
4304731252	RBU 8-4E	SENE	04	100S	190E	U-013792	7050	Federal	GW	P	
4304731322	RBU 1-19F	NENE	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304731323	RBU 5-10E	SWNW	10	100S	190E	U-013792	7050	Federal	GW	P	
4304731369	RBU 3-13E	NENW	13	100S	190E	U-013765	7050	Federal	GW	P	
4304731518	RBU 16-3E	SESE	03	100S	190E	U-035316	7050	Federal	GW	P	
4304731519	RBU 11-11F	NESW	11	100S	200E	U-7206	7050	Federal	GW	P	
4304731520	RBU 1-17F	NENE	17	100S	200E	U-013769-B	7050	Federal	GW	P	
4304731605	RBU 9-13E	NESE	13	100S	190E	U-013765	7050	Federal	GW	P	
4304731606	RBU 3-22E	NENW	22	100S	190E	U-013792	7050	Federal	GW	P	
4304731607	RBU 8-24E	SENE	24	100S	190E	U-013794	7050	Federal	GW	P	
4304731608	RBU 15-18F	SWSE	18	100S	200E	U-013794	7050	Federal	GW	P	

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

RIVER BEND UNIT

api	well_name	qtr	qtr	sec	tpw	rng	lease_num	entity	Lease	well	stat
4304731613	RBU 5-11F	SWNW	11	100S	200E	U-7206	7050	Federal	GW	P	
4304731615	RBU 4-22F	NWNW	22	100S	200E	U-0143521-A	7050	Federal	GW	S	
4304731652	RBU 6-17E	SWNW	17	100S	190E	U-03535	7050	Federal	GW	P	
4304731715	RBU 5-13E	SWNW	13	100S	190E	U-013765	7050	Federal	GW	P	
4304731717	RBU 13-13E	SWSW	13	100S	190E	U-013765	7050	Federal	GW	P	
4304731739	RBU 9-9E	NESE	09	100S	190E	U-03505	7050	Federal	GW	P	
4304732033	RBU 13-14E	SWSW	14	100S	190E	U-013792	7050	Federal	GW	P	
4304732037	RBU 11-3E	NESW	03	100S	190E	U-013765	7050	Federal	GW	P	
4304732038	RBU 6-18F	SENE	18	100S	200E	U-013769	7050	Federal	GW	P	
4304732040	RBU 15-24E	SWSE	24	100S	190E	U-013794	7050	Federal	GW	P	
4304732041	RBU 5-14E	SWNW	14	100S	190E	U-013792	7050	Federal	GW	P	
4304732050	RBU 12-20F	NWSW	20	100S	200E	U-0143520-A	7050	Federal	GW	P	
4304732051	RBU 7-13E	SWNE	13	100S	190E	U-013765	7050	Federal	GW	P	
4304732070	RBU 16-19F	SESE	19	100S	200E	U-013769-A	7050	Federal	WD	A	
4304732071	RBU 9-22E	NESE	22	100S	190E	U-013792	7050	Federal	GW	P	
4304732072	RBU 15-34B	SWSE	34	090S	190E	U-01773	7050	Federal	GW	P	
4304732073	RBU 11-15E	NESW	15	100S	190E	U-013766	7050	Federal	GW	P	
4304732074	RBU 13-21F	SWSW	21	100S	200E	U-0143520-A	7050	Federal	GW	P	
4304732075	RBU 10-22F	NWSE	22	100S	200E	U-01470-A	7050	Federal	GW	P	
4304732081	RBU 9-20F	NESE	20	100S	200E	U-0143520-A	7050	Federal	GW	P	
4304732082	RBU 15-23E	SWSE	23	100S	190E	U-013766	7050	Federal	GW	P	
4304732083	RBU 13-24E	SWSW	24	100S	190E	U-013794	7050	Federal	GW	P	
4304732095	RBU 3-21E	NENW	21	100S	190E	U-013766	7050	Federal	GW	P	
4304732103	RBU 15-17F	SWSE	17	100S	200E	U-013769-C	7050	Federal	GW	P	
4304732105	RBU 13-19F	SWSW	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304732107	RBU 1-21E	NENE	21	100S	190E	U-013766	7050	Federal	GW	P	
4304732128	RBU 9-21E	NESE	21	100S	190E	U-013766	7050	Federal	GW	P	
4304732129	RBU 9-17E	NESE	17	100S	190E	U-03505	7050	Federal	GW	P	
4304732133	RBU 13-14F	SWSW	14	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732134	RBU 9-11F	NESE	11	100S	200E	U-7206	7050	Federal	GW	P	
4304732138	RBU 5-21F	SWNW	21	100S	200E	U-013793	7050	Federal	GW	P	
4304732146	RBU 1-20E	NENE	20	100S	190E	U-03505	7050	Federal	GW	P	
4304732149	RBU 8-18F	SENE	18	100S	200E	U-013769	7050	Federal	GW	P	
4304732153	RBU 13-23E	SWSW	23	100S	190E	U-13766	7050	Federal	GW	P	
4304732154	RBU 5-24E	SWNW	24	100S	190E	U-013794	7050	Federal	GW	P	
4304732156	RBU 5-14F	SWNW	14	100S	200E	U-013793A	7050	Federal	GW	P	
4304732166	RBU 7-15E	SWNE	15	100S	190E	U-013766	7050	Federal	GW	P	
4304732167	RBU 15-13E	SWSE	13	100S	190E	U-013765	7050	Federal	GW	P	
4304732189	RBU 13-10F	SWSW	10	100S	200E	14-20-H62-2645	7050	Indian	GW	P	
4304732190	RBU 15-10E	SWSE	10	100S	190E	U-013792	7050	Federal	GW	P	
4304732191	RBU 3-17FX	NENW	17	100S	200E	U-013769-C	7050	Federal	GW	P	
4304732197	RBU 13-15E	SWSW	15	100S	190E	U-013766	7050	Federal	GW	P	
4304732198	RBU 7-22E	SWNE	22	100S	190E	U-013792	7050	Federal	GW	P	
4304732199	RBU 5-23E	SWNW	23	100S	190E	U-013766	7050	Federal	GW	P	
4304732201	RBU 13-18F	SWSW	18	100S	200E	U-013793	7050	Federal	GW	S	
4304732211	RBU 15-15E	SWSE	15	100S	190E	U-013766	7050	Federal	GW	P	

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

RIVER BEND UNIT

api	well_name	qtr	qtr	sec	tpw	rng	lease_num	entity	Lease	well	stat
4304732213	RBU 5-19F	SWNW	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304732217	RBU 9-17F	NESE	17	100S	200E	U-013769-C	7050	Federal	GW	P	
4304732219	RBU 15-14E	SWSE	14	100S	190E	U-013792	7050	Federal	GW	P	
4304732220	RBU 5-3E	SWNW	03	100S	190E	U-03505	7050	Federal	GW	P	
4304732228	RBU 9-3E	NESE	03	100S	190E	U-035316	7050	Federal	GW	P	
4304732239	RBU 7-14E	SWNE	14	100S	190E	U-103792	7050	Federal	GW	P	
4304732240	RBU 9-14F	NESE	14	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732242	RBU 5-22E	SWNW	22	100S	190E	U-013792	7050	Federal	GW	P	
4304732263	RBU 8-13E	SENE	13	100S	190E	U-013765	7050	Federal	GW	P	
4304732266	RBU 9-21F	NESE	21	100S	200E	U-0143520-A	7050	Federal	GW	P	
4304732267	RBU 5-10F	SWNW	10	100S	200E	U-7206	7050	Federal	GW	P	
4304732268	RBU 9-10F	NESE	10	100S	200E	U-7206	7050	Federal	GW	P	
4304732269	RBU 4-15F	NWNW	15	100S	200E	INDIAN	7050	Indian	GW	PA	
4304732270	RBU 14-22F	SESW	22	100S	200E	U-0143519	7050	Federal	GW	P	
4304732276	RBU 5-21E	SWNW	21	100S	190E	U-013766	7050	Federal	GW	P	
4304732289	RBU 7-10E	SWNE	10	100S	190E	U-013792	7050	Federal	GW	P	
4304732290	RBU 5-17F	SWNW	17	100S	200E	U-013769-C	7050	Federal	GW	P	
4304732293	RBU 3-3E	NENW	03	100S	190E	U-013765	7050	Federal	GW	P	
4304732295	RBU 13-22E	SWSW	22	100S	190E	U-013792	7050	Federal	GW	P	
4304732301	RBU 7-21E	SWNE	21	100S	190E	U-013766	7050	Federal	GW	P	
4304732309	RBU 15-21F	SWSE	21	100S	200E	U-0143520-A	7050	Federal	GW	P	
4304732310	RBU 15-20F	SWSE	20	100S	200E	U-0143520-A	7050	Federal	GW	P	
4304732312	RBU 9-24E	NESE	24	100S	190E	U-013794	7050	Federal	GW	P	
4304732313	RBU 3-20F	NENW	20	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732315	RBU 11-21F	NESW	21	100S	200E	U-0143520-A	7050	Federal	GW	P	
4304732317	RBU 15-22E	SWSE	22	100S	190E	U-013792	7050	Federal	GW	P	
4304732328	RBU 3-19FX	NENW	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304732331	RBU 2-11F	NWNE	11	100S	200E	U-01790	7050	Federal	GW	P	
4304732347	RBU 3-11F	NENW	11	100S	200E	U-7206	7050	Federal	GW	P	
4304732391	RBU 2-23F	NWNE	23	100S	200E	U-013793-A	7050	Federal	GW	S	
4304732392	RBU 11-14F	NESW	14	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732396	RBU 3-21F	NENW	21	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732407	RBU 15-14F	SWSE	14	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732408	RBU 4-23F	NWNW	23	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732415	RBU 3-10EX (RIG SKID)	NENW	10	100S	190E	UTU-035316	7050	Federal	GW	P	
4304732483	RBU 5-24EO	SWNW	24	100S	190E	U-013794	11719	Federal	OW	S	
4304732512	RBU 8-11F	SENE	11	100S	200E	U-01790	7050	Federal	GW	P	
4304732844	RBU 15-15F	SWSE	15	100S	200E	14-20-H62-2646	7050	Indian	GW	P	
4304732899	RBU 3-14F	NENW	14	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732900	RBU 8-23F	SENE	23	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732901	RBU 12-23F	NWSW	23	100S	200E	U-01470-A	7050	Federal	GW	P	
4304732902	RBU 1-15F	NENE	15	100S	200E	U-7260	7050	Federal	GW	S	
4304732903	RBU 3-15F	NENW	15	100S	200E	U-7260	7050	Federal	GW	P	
4304732904	RBU 9-15F	NESE	15	100S	200E	U-7260	7050	Federal	GW	P	
4304732934	RBU 3-10F	NENW	10	100S	200E	U-7206	7050	Federal	GW	P	
4304732969	RBU 11-10F	NESW	10	100S	200E	U-7206	7050	Federal	GW	P	

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

RIVER BEND UNIT

api	well name	qtr	qtr	sec	twp	rng	lease num	entity	Lease	well	stat
4304732970	RBU 12-15F	NWSW	15	100S	200E	U-7206	7050	Federal	GW	P	
4304732971	RBU 15-16F	SWSE	16	100S	200E	U-7206	7050	Federal	GW	S	
4304732972	RBU 1-21F	NENE	21	100S	200E	U-013793-A	7050	Federal	GW	P	
4304732989	RBU 13-10E	SWSW	10	100S	190E	U-013792	7050	Federal	GW	P	
4304732990	RBU 13-18F2	SWSW	18	100S	200E	U-013793	7050	Federal	GW	P	
4304732991	RBU 6-19F	SENW	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304733033	RBU 7-23E	NWNE	23	100S	190E	U-013766	7050	Federal	GW	P	
4304733034	RBU 9-18F	NESE	18	100S	200E	U-013794	7050	Federal	GW	P	
4304733035	RBU 14-19F	SESW	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304733087	RBU 6-23F	SENW	23	100S	200E	U-013793-A	7050	Federal	GW	P	
4304733088	RBU 1-10F	NENE	10	100S	200E	U-7206	7050	Federal	GW	P	
4304733089	RBU 8-22F	SENE	22	100S	200E	U-0143521	7050	Federal	GW	P	
4304733090	RBU 11-22F	NESW	22	100S	200E	U-0143519	7050	Federal	GW	P	
4304733091	RBU 16-22F	SESE	22	100S	200E	U-01470-A	7050	Federal	GW	P	
4304733156	RBU 4-14E	NWNW	14	100S	190E	U-013792	7050	Federal	GW	P	
4304733157	RBU 7-19F	SWNE	19	100S	200E	U-013769-A	7050	Federal	GW	P	
4304733158	RBU 7-20F	SWNE	20	100S	200E	U-013793-A	7050	Federal	GW	P	
4304733159	RBU 7-24E	SWNE	24	100S	190E	U-013794	7050	Federal	GW	P	
4304733160	RBU 8-15E	SENE	15	100S	190E	U-013766	7050	Federal	GW	P	
4304733161	RBU 16-10E	SESE	10	100S	190E	U-013792	7050	Federal	GW	P	
4304733194	RBU 2-14E	NWNE	14	100S	190E	U-013792	7050	Federal	GW	P	
4304733272	RBU 13-3F	SWSW	03	100S	200E	U-013767	7050	Federal	GW	P	
4304733361	RBU 5-3F	SWNW	03	100S	200E	U-013767	7050	Federal	GW	P	
4304733362	RBU 15-10F	SWSE	10	100S	200E	U-7206	7050	Federal	GW	P	
4304733363	RBU 5-16F	SWNW	16	100S	200E	U-7206	7050	Federal	GW	P	
4304733365	RBU 12-14E	NWSW	14	100S	190E	U-013792	7050	Federal	GW	P	
4304733366	RBU 5-18F	SWNW	18	100S	200E	U-013769	7050	Federal	GW	P	
4304733367	RBU 10-23F	NWSE	23	100S	200E	U-01470-A	7050	Federal	GW	P	
4304733368	RBU 14-23F	SESW	23	100S	200E	U-01470-A	7050	Federal	GW	S	
4304733424	RBU 5-20F	SWNW	20	100S	200E	U-013793-A	7050	Federal	GW	P	
4304733643	RBU 2-13E	NWNE	13	100S	190E	U-013765	7050	Federal	GW	P	
4304733644	RBU 4-13E	NWNW	13	100S	190E	U-013765	7050	Federal	GW	P	
4304733714	RBU 4-23E	NWNW	23	100S	190E	U-013766	7050	Federal	GW	P	
4304733715	RBU 6-13E	SENW	13	100S	190E	U-013765	7050	Federal	GW	P	
4304733716	RBU 10-14E	NWSE	14	100S	190E	U-013792	7050	Federal	GW	P	
4304733838	RBU 8-10E	SENE	10	100S	190E	U-013792	7050	Federal	GW	P	
4304733839	RBU 12-23E	NWSW	23	100S	190E	U-013766	7050	Federal	GW	P	
4304733840	RBU 12-24E	NWSW	24	100S	190E	U-013794	7050	Federal	GW	P	
4304733841	RBU 14-23E	SESW	23	100S	190E	U-013766	7050	Federal	GW	P	
4304734302	RBU 1-23F	NENE	23	100S	200E	UTU-013793-A	7050	Federal	GW	P	
4304734661	RBU 16-15E	SESE	15	100S	190E	U-013766	7050	Federal	GW	P	
4304734662	RBU 10-14F	NWSE	14	100S	200E	U-013793-A	7050	Federal	GW	P	
4304734663	RBU 6-14E	SENW	14	100S	190E	U-013792	7050	Federal	GW	P	
4304734670	RBU 8-23E	NENE	23	100S	190E	U-013766	7050	Federal	GW	P	
4304734671	RBU 4-24E	NENE	23	100S	190E	U-013766	7050	Federal	GW	P	
4304734701	RBU 12-11F	SENW	11	100S	200E	U-7206	7050	Federal	GW	P	

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

RIVER BEND UNIT

api	well_name	qtr_qtr	sec	tpw	rng	lease_num	entity	Lease	well	stat
4304734702	RBW 2-15E	NWNE	15	100S	190E	U-013766	7050	Federal	GW	P
4304734703	RBW 4-17F	NWNW	17	100S	200E	U-013769-C	7050	Federal	GW	P
4304734745	RBW 10-20F	NESE	20	100S	200E	U-0143520-A	7050	Federal	GW	P
4304734749	RBW 7-18F	SWNE	18	100S	200E	U-013769	7050	Federal	GW	P
4304734750	RBW 12-10F	SWSW	10	100S	200E	14-20-H62-2645	7050	Indian	GW	P
4304734810	RBW 10-13E	NWSE	13	100S	190E	U-013765	7050	Federal	GW	P
4304734812	RBW 1-24E	NENE	24	100S	190E	U-013794	7050	Federal	GW	P
4304734826	RBW 12-21F	NESE	20	100S	200E	U-0143520-A	7050	Federal	GW	P
4304734828	RBW 4-15E	NWNW	15	100S	190E	U-013766	7050	Federal	GW	P
4304734844	RBW 14-14E	SESW	14	100S	190E	U-013792	7050	Federal	GW	P
4304734845	RBW 10-24E	NWSE	24	100S	190E	U-013794	7050	Federal	GW	P
4304734888	RBW 4-21E	NWNW	21	100S	190E	U-013766	7050	Federal	GW	P
4304734889	RBW 16-24E	SESE	24	100S	190E	U-13794	7050	Federal	GW	P
4304734890	RBW 12-18F2	NWSW	18	100S	200E	U-013793	7050	Federal	GW	P
4304734891	RBW 10-23E	NESW	23	100S	190E	U-013766	7050	Federal	GW	P
4304734892	RBW 8-22E	SENE	22	100S	190E	U-013792	7050	Federal	GW	P
4304734906	RBW 6-22E	SENE	22	100S	190E	U-013792	7050	Federal	GW	P
4304734907	RBW 2-24E	NWNE	24	100S	190E	U-013794	7050	Federal	GW	P
4304734910	RBW 4-16F	NWNW	16	100S	200E	U-7206	7050	Federal	GW	P
4304734911	RBW 12-19F	NWSW	19	100S	200E	U-013769-A	7050	Federal	GW	P
4304734912	RBW 14-20F	SESW	20	100S	200E	U-0143520-A	7050	Federal	GW	P
4304734942	RBW 1-22F	NWNW	23	100S	200E	U-013793-A	7050	Federal	GW	P
4304734945	RBW 8-19F	SENE	19	100S	200E	U-013769-A	7050	Federal	GW	P
4304734946	RBW 8-20F	SENE	20	100S	200E	U-013793-A	7050	Federal	GW	P
4304734962	RBW 12-17F	NWSW	17	100S	200E	U-013769-C	7050	Federal	GW	P
4304734963	RBW 2-17F	NWNE	17	100S	200E	U-013769-C	14117	Federal	GW	P
4304734966	RBW 14-18F	SESW	18	100S	200E	U-013793	7050	Federal	GW	P
4304734967	RBW 10-18F	NWSE	18	100S	200E	U-013794	7050	Federal	GW	P
4304734968	RBW 10-19F	NWSE	19	100S	200E	U-013769-A	7050	Federal	GW	P
4304734969	RBW 10-3E	NWSE	03	100S	190E	U-035316	7050	Federal	GW	P
4304734970	RBW 12-3E	NWSW	03	100S	190E	U-013765	7050	Federal	GW	P
4304734971	RBW 15-3E	SWSE	03	100S	190E	U-35316	7050	Federal	GW	P
4304734974	RBW 12-10E	NWSW	10	100S	190E	U-013792	14025	Federal	GW	P
4304734975	RBW 14-10E	NENW	15	100S	190E	U-013766	7050	Federal	GW	P
4304734976	RBW 16-13E	SESE	13	100S	190E	U-013765	7050	Federal	GW	P
4304734977	RBW 8-14E	SENE	14	100S	190E	U-013792	7050	Federal	GW	P
4304734978	RBW 6-15E	SENE	15	100S	190E	U-013766	7050	Federal	GW	P
4304734979	RBW 12-15E	NWSW	15	100S	190E	U-013766	7050	Federal	GW	P
4304734981	RBW 16-17E	SESE	17	100S	190E	U-013766	7050	Federal	GW	P
4304734982	RBW 8-21E	SENE	21	100S	190E	U-013766	7050	Federal	GW	P
4304734983	RBW 4-22E	NWNW	22	100S	190E	U-013792	7050	Federal	GW	P
4304734986	RBW 2-20F	NWNE	20	100S	200E	U-03505	7050	Federal	GW	P
4304734987	RBW 9-20E	SWNW	21	100S	190E	U-03505	7050	Federal	GW	P
4304734989	RBW 7-20E	NENE	20	100S	190E	U-03505	7050	Federal	GW	P
4304734990	RBW 8-20E	SWNW	21	100S	190E	U-03505	14164	Federal	GW	P
4304735041	RBW 16-23E	SWSE	23	100S	190E	U-013766	7050	Federal	GW	P

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

RIVER BEND UNIT

api	well_name	qtr_qtr	sec	tpw	rng	lease_num	entity	Lease	well	stat
4304735042	RBU 12-22E	NWSW	22	100S	190E	U-013792	14165	Federal	GW	P
4304735058	RBU 7-23F	SWNE	23	100S	200E	U-013793-A	7050	Federal	GW	P
4304735059	RBU 12-13E	NWSW	13	100S	190E	U-013765	7050	Federal	GW	P
4304735060	RBU 14-13E	SESW	13	100S	190E	U-013765	7050	Federal	GW	P
4304735061	RBU 2-22E	NWNE	22	100S	190E	U-013792	7050	Federal	GW	P
4304735062	RBU 6-24E	SESW	24	100S	190E	U-013794	7050	Federal	GW	P
4304735082	RBU 4-17E	NWNW	17	100S	190E	U-03505	7050	Federal	GW	P
4304735086	RBU 16-14E	NENE	23	100S	190E	U-013792	7050	Federal	GW	P
4304735087	RBU 2-3E	NWNE	03	100S	190E	U-013765	7050	Federal	GW	P
4304735088	RBU 6-3E	SESW	03	100S	190E	U-03505	7050	Federal	GW	P
4304735100	RBU 10-10E	NWSE	10	100S	190E	U-013792	7050	Federal	GW	P
4304735101	RBU 16-22E	SESE	22	100S	190E	U-013792	7050	Federal	GW	P
4304735112	RBU 14-24E	SESW	24	100S	190E	U-013794	7050	Federal	GW	P
4304735129	RBU 6-21F	SESW	21	100S	200E	U-013793-A	7050	Federal	GW	P
4304735170	RBU 1-9E	NESE	09	100S	190E	U-03505	7050	Federal	GW	P
4304735171	RBU 16-9E	NESE	09	100S	190E	U-013765	7050	Federal	GW	P
4304735232	RBU 14-21F	SESW	21	100S	200E	U-0143520	7050	Federal	GW	P
4304735250	RBU 13-19F2	NWSW	19	100S	200E	U-013769-A	7050	Federal	GW	P
4304735251	RBU 15-19F	SWSE	19	100S	200E	U-013769-A	7050	Federal	GW	P
4304735270	RBU 16-21E	SESE	21	100S	190E	U-013766	7050	Federal	GW	P
4304735304	RBU 13-20F	SWSW	20	100S	200E	U-013769	7050	Federal	GW	P
4304735305	RBU 4-21F	NWNW	21	100S	200E	U-013793-A	7050	Federal	GW	P
4304735306	RBU 16-21F	SESE	21	100S	200E	U-0143520-A	7050	Federal	GW	P
4304735468	RBU 15-22F	SWSE	22	100S	200E	U-01470-A	7050	Federal	GW	P
4304735469	RBU 11-23F	SESW	23	100S	200E	U-01470A	7050	Federal	GW	P
4304735549	RBU 1-14F	NENE	14	100S	200E	UTU-013793-A	7050	Federal	GW	P
4304735640	RBU 2-21E	NWNE	21	100S	190E	U-013766	7050	Federal	GW	P
4304735644	RBU 10-17E	NWSE	17	100S	190E	U-013766	7050	Federal	GW	P
4304735645	RBU 12-21E	NWSW	21	100S	190E	U-013766	7050	Federal	GW	P
4304736200	RBU 8-17E	SWNE	17	100S	190E	U-013766	7050	Federal	GW	P
4304736201	RBU 15-17EX	SWSE	17	100S	190E	U-013766	7050	Federal	GW	P
4304736293	RBU 2-10E	NWNE	10	100S	190E	U-013792	7050	Federal	GW	P
4304736294	RBU 6-10E	NENW	10	100S	190E	U-013792	7050	Federal	GW	P
4304736296	RBU 6-21E	SESW	21	100S	190E	U-013766	7050	Federal	GW	P
4304736297	RBU 10-22E	NWSE	22	100S	190E	U-013792	7050	Federal	GW	P
4304736318	RBU 14-22E	SESW	22	100S	190E	U-013792	7050	Federal	GW	P
4304736427	RBU 9-15E	NESE	15	100S	190E	U-013766	7050	Federal	GW	DRL
4304736428	RBU 2-17E	NWNE	17	100S	190E	U-013766	7050	Federal	GW	P
4304736429	RBU 1-17E	NENE	17	100S	190E	U-013766	7050	Federal	GW	DRL
4304736432	RBU 3-19F2	NWNW	19	100S	200E	U-013769-A	15234	Federal	GW	P
4304736433	RBU 14-17F	SESW	17	100S	200E	U-03505	7050	Federal	GW	P
4304736434	RBU 2-19F	NWNE	19	100S	200E	U-013769-A	7050	Federal	GW	P
4304736435	RBU 5-19FX	SWNW	19	100S	200E	U-013769-A	15855	Federal	GW	P
4304736436	RBU 4-20F	NWNW	20	100S	200E	U-013793-A	7050	Federal	GW	P
4304736605	RBU 16-14F	SESE	14	100S	200E	U-013793A	7050	Federal	GW	P
4304736608	RBU 4-3E	NWNW	03	100S	190E	U-035316	7050	Federal	GW	P

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

RIVER BEND UNIT

api	well_name	qtr_qtr	sec	twp	rng	lease_num	entity	Lease	well	stat
4304736609	RBU 8-3E	SENE	03	100S	190E	U-013765	7050	Federal	GW	P
4304736610	RBU 14-3E	SESW	03	100S	190E	U-013765	7050	Federal	GW	P
4304736686	RBU 13-3E	NWSW	03	100S	190E	U-013765	15235	Federal	GW	P
4304736810	RBU 1-3E	NENE	03	100S	190E	U-013765	7050	Federal	GW	DRL
4304736850	RBU 2-10F	NWNE	10	100S	200E	U-7206	7050	Federal	GW	P
4304736851	RBU 8-21F	SENE	21	100S	200E	U-013793-A	7050	Federal	GW	P
4304737033	RBU 4-10E	SWNW	10	100S	190E	U-035316	7050	Federal	GW	P
4304737057	RBU 11-17E	NWSE	17	100S	190E	U-03505	7050	Federal	GW	DRL
4304737058	RBU 3-17E	NENW	17	100S	190E	U-03505	7050	Federal	GW	P
4304737201	RBU 3-23F	NENW	23	100S	200E	U-013793-A	7050	Federal	OW	P
4304737341	RBU 11-20F	NESW	20	100S	200E	U-0143520-A	7050	Federal	GW	P
4304737342	RBU 5-15F	SWNW	15	100S	200E	U-7206	7050	Federal	OW	P
4304737343	RBU 10-16F	NWSE	16	100S	200E	U-7206	7050	Federal	OW	P
4304737344	RBU 9-16F	NESE	16	100S	200E	U-7206	7050	Federal	OW	S
4304737450	RBU 14-17E	SESW	17	100S	190E	U-03505	7050	Federal	GW	P
4304737747	RBU 15-9E	NWNE	16	100S	190E	U-013765	7050	Federal	GW	DRL
4304737893	RBU 9-4EA	SENE	04	100S	190E	U-03505	7050	Federal	GW	P
4304737998	RBU 13-23F	SWSW	23	100S	200E	U-01470-A	7050	Federal	GW	P
4304738181	RBU 12-4E	SWNW	04	100S	190E	U-03576	99999	Federal	GW	DRL
4304738182	RBU 11-4E	SE/4	04	100S	190E	U-03505	99999	Federal	GW	DRL
4304738294	RBU 2-4E	NWNE	04	100S	190E	U-013792	7050	Federal	GW	DRL
4304738295	RBU 5-4E	SWNW	04	100S	190E	U-03576	99999	Federal	GW	DRL
4304738543	RBU 28-18F	NESE	13	100S	190E	U 013793-A	7050	Federal	GW	DRL
4304738548	RBU 32-13E	NESE	13	100S	190E	U-013765	7050	Federal	GW	DRL
4304738555	RBU 27-18F	SWSW	18	100S	200E	U-013793	7050	Federal	GW	DRL
4304738556	RBU 27-18F2	SWSW	18	100S	200E	U-013793	7050	Federal	GW	DRL
4304738557	RBU 30-18F	SWSW	18	100S	200E	U-013793	7050	Federal	GW	P
4304738558	RBU 29-18F	SWSW	18	100S	200E	U-013793	7050	Federal	GW	DRL
4304738595	RBU 31-10E	NENE	15	100S	190E	U-013792	7050	Federal	GW	DRL
4304738596	RBU 17-15E	NENE	15	100S	190E	U-013766	7050	Federal	GW	DRL
4304738780	RBU 8B-17E	SENE	17	100S	190E	U-013766	7050	Federal	GW	DRL

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

RIVER BEND UNIT

api	well name	qtr	qtr	sec	twp	rng	lease num	entity	Lease	well	stat
4304730153	NATURAL 1-2	SE	NW	02	100S	200E	ML-10716	11377	State	OW	PA
4304730260	RBU 11-16E	NE	SW	16	100S	190E	ML-13214	7050	State	GW	S
4304730583	RBU 11-36B	NE	SW	36	090S	190E	ML-22541	99998	State	NA	PA
4304730608	RBU 8-16D	SE	NE	16	100S	180E	ML-13216	99998	State	NA	PA
4304730760	RBU 11-2F	NE	SW	02	100S	200E	ML-10716	9966	State	OW	S
4304731740	RBU 1-16E	NE	NE	16	100S	190E	ML-13214	7050	State	GW	P
4304732026	RBU 16-2F	SE	SE	02	100S	200E	ML-10716	7050	State	GW	P
4304732042	RBU 9-16E	NE	SE	16	100S	190E	ML-13214	7050	State	GW	P
4304732108	RBU 14-2F	SE	SW	02	100S	200E	ML-10716	7050	State	GW	P
4304732136	RBU 8-2F	SE	NE	02	100S	200E	ML-10716	7050	State	GW	P
4304732137	RBU 5-16E	SW	NW	16	100S	190E	ML-13214	7050	State	GW	P
4304732245	RBU 7-16E	SW	NE	16	100S	190E	ML-13214	7050	State	GW	PA
4304732250	RBU 13-16E	SW	SW	16	100S	190E	ML-13214	7050	State	GW	S
4304732292	RBU 15-16E	SW	SE	16	100S	190E	ML-13214	7050	State	GW	PA
4304732314	RBU 10-2F	NW	SE	02	100S	200E	ML-10716	7050	State	GW	P
4304732352	RBU 3-16F	NE	NW	16	100S	200E	ML-3393-A	7050	State	GW	P
4304733360	RBU 1-16F	NE	NE	16	100S	200E	ML-3393	7050	State	GW	P
4304734061	RBU 6-16E	SW	NE	16	100S	190E	ML-13214	7050	State	GW	P
4304734167	RBU 1-2F	NE	NE	02	100S	200E	ML-10716		State	GW	LA
4304734315	STATE 11-2D	NE	SW	02	100S	180E	ML-26968		State	GW	LA
4304734903	RBU 14-16E	SW	SW	16	100S	190E	ML-13214	7050	State	D	PA
4304735020	RBU 8-16E	SE	NE	16	100S	190E	ML-13214	7050	State	GW	P
4304735021	RBU 10-16E	SW	SE	16	100S	190E	ML-13214	7050	State	GW	P
4304735022	RBU 12-16E	NE	SW	16	100S	190E	ML-13214	7050	State	GW	P
4304735023	RBU 16-16E	SW	SW	15	100S	190E	ML-13214	7050	State	GW	P
4304735033	RBU 2-16E	NW	NE	16	100S	190E	ML-13214	7050	State	GW	P
4304735081	RBU 15-2F	SW	SE	02	100S	200E	ML-10716	7050	State	GW	P
4304735348	RBU 13-16F	NW	NW	21	100S	200E	ML-3394	7050	State	GW	DRL
4304736169	RBU 4-16E	NE	NW	16	100S	190E	ML-13214	7050	State	GW	P
4304736170	RBU 3-16E	NE	NW	16	100S	190E	ML-13214	7050	State	GW	P



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155



IN REPLY REFER TO
3180
UT-922

Dominion Exploration & Production, Inc.
Attn: James D. Abercrombie
14000 Quail Springs Parkway, #600
Oklahoma City, OK 73134-2600

August 10, 2007

Re: River Bend Unit
Uintah County, Utah

Gentlemen:

On August 8, 2007, we received an indenture dated June 30, 2007, whereby Dominion Exploration & Production, Inc. resigned as Unit Operator and XTO Energy Inc. was designated as Successor Unit Operator for the River Bend Unit, Uintah County, Utah.

This indenture was executed by all required parties and the signatory parties have complied with Sections 5 and 6 of the unit agreement. The instrument is hereby approved effective August 15, 2007. In approving this designation, the Authorized Officer neither warrants nor certifies that the designated party has obtained all required approval that would entitle it to conduct operations under the River Bend Unit Agreement.

Your statewide oil and gas bond No. UTB000138 will be used to cover all operations within the River Bend Unit.

It is requested that you notify all interested parties of the change in unit operator. Copies of the approved instruments are being distributed to the appropriate federal offices, with one copy returned herewith.

Sincerely,

/s/ Greg J. Noble

Greg J. Noble
Acting Chief, Branch of Fluid Minerals

Enclosure

RECEIVED
AUG 16 2007
DIV. OF OIL, GAS & MINING