

CNG Producing
Company

CNG

May 19, 2000

Mr. Wayne Bankart
U.S. Dept. of the Interior
Bureau of Land Management
Vernal District Office
170 South 500 East
Vernal, UT 84078

RE: Application for Permit to Drill
Federal #13-30B Sec. 30-T9S-R19E

Dear Wayne:

Enclosed please find an original and two copies of the above referenced Applications for Permit to Drill for the above referenced wells.

CNG Producing Company is requesting that all well information be held strictly confidential.

Should you have any questions please feel free to contact either myself at (504) 593-7260 or our project engineer, David Linger at (281) 873-1561.

Sincerely,



Susan H. Sachitana
Regulatory Reports Administrator

Enclosure

cc: Utah Board of Oil, Gas & Mining
David Linger
Nelda Decker
Mitch Hall

RECEIVED

MAY 22 2000

DIVISION OF
OIL, GAS AND MINING

SUBMIT IN TRIPLICATE*
(Other instructions on
reverse side)

FORM APPROVED
OMB NO. 1004-0136
Expires: February 28, 1995

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK
 DRILL DEEPEN

b. TYPE OF WELL
 OIL WELL GAS WELL OTHER SINGLE ZONE MULTIPLE ZONE

2. NAME OF OPERATOR
CNG PRODUCING COMPANY

3. ADDRESS AND TELEPHONE NO.
CNG TOWER - 1450 POYDRAS STREET, NEW ORLEANS, LA 70112-6000

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements*)
 At surface 900' FSL & 1,000' FSL of Sec. 30-T9S-R19E
 At proposed prod. zone **FWL**
4427912 N
599966 E

5. LEASE DESIGNATION AND SERIAL NO.
U-37246

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME WELL NO.
FEDERAL #13-30B

9. API WELL NO.

10. FIELD AND POOL, OR WILDCAT
NATURAL BUTTES 630

11. SEC. T., R., M., OR BLK. AND SURVEY OR AREA
30-T9S-R19E **SWSW**

12. COUNTY OR PARISH
UINTAH

13. STATE
UTAH

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*
10 MILES SW OF OURAY

15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT.
(Also to nearest drlg. line, if any) 1,000'

16. NO. OF ACRES IN LEASE
600

17. NO. OF ACRES ASSIGNED TO THIS WELL
80 ACRES

18. DISTANCE FROM PROPOSED* LOCATION TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT. 2,400'

19. PROPOSED DEPTH
9,750'

20. ROTARY OR CABLE TOOLS
ROTARY

21. ELEVATIONS (Show whether DF, RT, GR, etc.)
4,839'

22. APPROX. DATE WORK WILL START
JUNE 15, 2000

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
17 1/2"	13 3/8"	54.5#	84'	
12 1/4"	8 5/8"	24#	3,000'	
7 7/8"	5 1/2"	17#	9,750'	

1. Drill a 17 1/2" hole to 84'. Run 13 3/8" 54.5 #/ft K-55 casing and cement to surface.
2. Drill a 12 1/4" hole with an air rig to 3,000', run 8 5/8", K-55 casing and cement to surface.
3. Nipple up and pressure test BOP stack prior to drilling out below surface pipe.
4. Operate pipe rams daily and blind rams as possible.
5. Drill a 7 7/8" hole to 9,750' with a KCL water mud system. Coring is possible. DST's will be run as needed to evaluate unexpected shows.
6. Run logs, set 5 1/2" 17# N-80 casing as dictated by drilling shows, tests, and logs. Casing program may be modified to provide added burst strength if needed for frac program.
7. Primary zones of interests are the Wasatch, Chapita Wells, Uteland Buttes and Mesa Verde.
8. All zones indicating potential for economically recoverable reserves will be tested in a normal, prudent manner.
9. In the event circulation is lost, air or air assisted mud will be utilized.

FORMATION TOPS	DEPTHS
Wasatch Tongue	4,674'
Green River Tongue	5,067'
Wasatch	5,229'
Chapita Wells	5,947'
Uteland Buttes	7,154'
Mesaverde	8,374'

APPROVED

MAY 22 2000

**DIVISION OF
OIL, GAS AND MINERAL RESOURCES**

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED David Linger / dhw TITLE Onshore Drilling Manager DATE May 8, 2000
 David L. Linger

(This space for Federal or State office use)
 PERMIT NO. 43-042-33581 OVAL DATE _____

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
 CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY Bradley G. Hill TITLE REGULATION SPECIALIST III DATE 6/12/00
 BRADLEY G. HILL
 REGULATION SPECIALIST III

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

T9S, R19E, S.L.B.&M.



CNG PRODUCING COMPANY

Well location, FEDERAL #13-30B, located as shown in the SW 1/4 SW 1/4 of Section 30, T9S, R19E, S.L.B.&M. Uintah County Utah.

N89°57'E - 79.94 (G.L.O.)

BASIS OF ELEVATION

SPOT ELEVATION AT THE SOUTHWEST CORNER OF SECTION 30, T9S, R19E, S.L.B.&M. TAKEN FROM THE MOON BOTTOM QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4838 FEET.

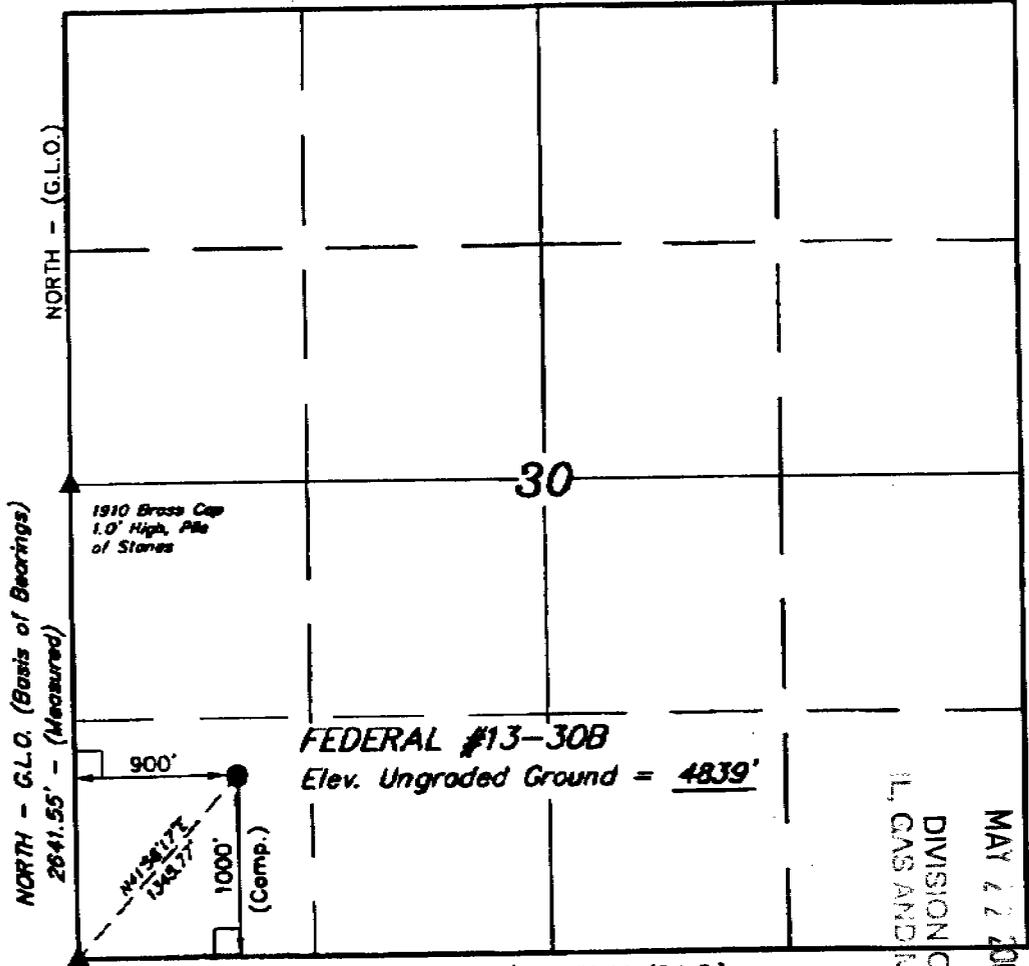

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Robert J. Key
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 161319
 STATE OF UTAH

UINTAH ENGINEERING & LAND SURVEYING		
86 SOUTH 200 EAST - VERNAL, UTAH 84078		
(435) 789-1017		
SCALE 1" = 1000'	DATE SURVEYED: 04-25-00	DATE DRAWN: 05-01-00
PARTY J.F. B.H. D.R.B.	REFERENCES G.L.O. PLAT	
WEATHER COOL	FILE DOMINION EXPLR. & PROD. INC.	

LEGEND:


- └ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

LATITUDE = 39°59'50"
 LONGITUDE = 109°49'42"


3" Brass Cap
 2.5" High, Pile
 of Stones

1910 Brass Cap
 1.0" High, Pile
 of Stones

BOP STACK

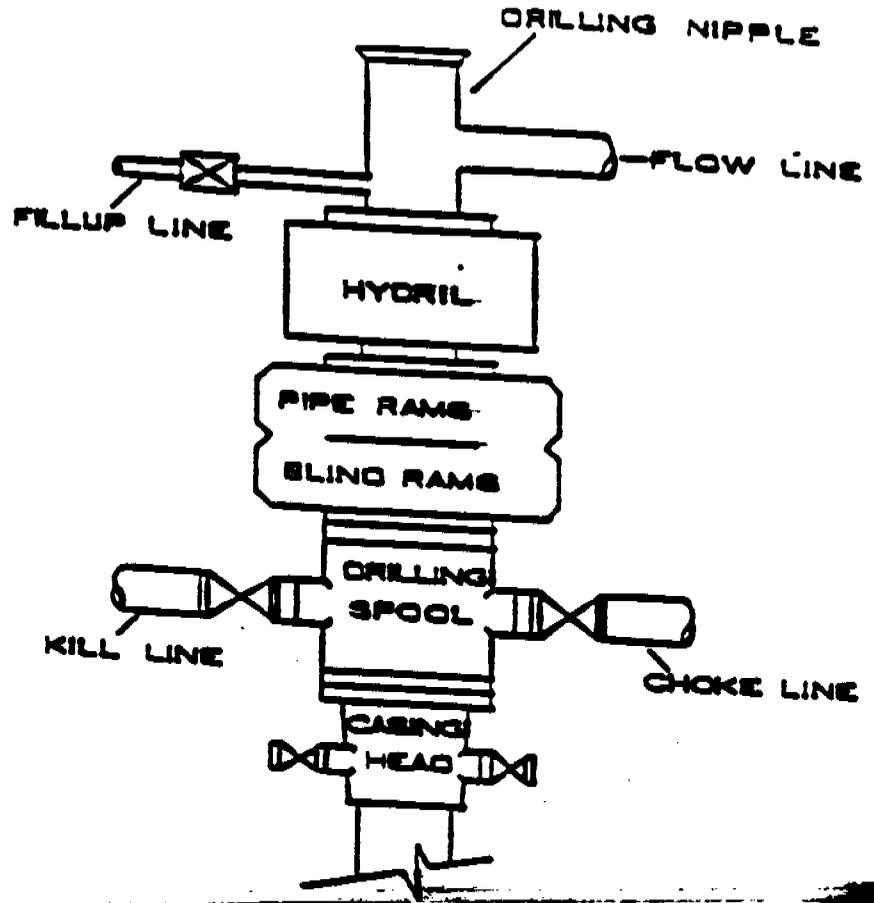

CHOKER MANIFOLD

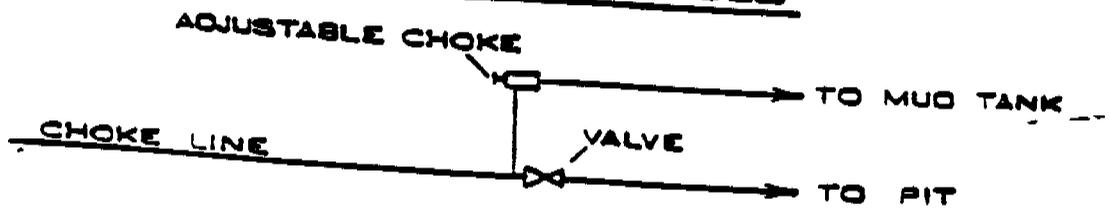


MAY 22 2000

DIVISION OF
OIL, GAS AND MINERAL RESOURCES


SELF-CERTIFICATION STATEMENT

Self-certification statement. Under the Federal regulation in effect as of June 15, 1988 designation of operator forms are no longer required when the operator is not the 100% record title holder. An operator is now required to submit a self-certification statement to the appropriate Bureau office stating that said operator has the right to operate upon the leasehold premises. Said notification may be in the following format:

"Please be advised that CNG Producing Company is considered to be the operator of Well No. 13-30B SW 1/4 of SW 1/4 Section 30, Township 9S, Range 19E; Lease U-37246; Uintah County, Utah; and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by American Casualty Company of Reading, PA, Bond #524 7050.



David L. Linger
Onshore Drilling Manager


MAY 22 2000

DIVISION OF
OIL, GAS AND MINERAL RESOURCES

**DRILLING PLAN
APPROVAL OF OPERATIONS**

May 19, 2000

Attachment for Permit to Drill

Name of Operator: CNG PRODUCING COMPANY
Address: CNG TOWER - 1450 POYDRAS STREET
NEW ORLEANS, LA 70112-6000

WELL LOCATION: Well No. 13-30B
Uintah, Utah

1. **GEOLOGIC SURFACE FORMATION**

Uintah

2. **ESTIMATE IMPORTANT GEOLOGIC MARKERS**

Formation	Depth
Wasatch Tongue	4,674'
Green River Tongue	5,067'
Wasatch	5,229'
Chapita Wells	5,947'
Uteland Buttes	7,154'
Mesaverde	8,374'

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS**

Formation	Depth	Remarks
Wasatch Tongue	4,674'	Oil Zone
Green River Tongue	5,067'	Oil Zone
Wasatch	5,229'	Gas Zone
Chapita Wells	5,947'	Gas Zone
Uteland Buttes	7,154'	Gas Zone
Mesaverde	8,374'	Gas Zone

4. **PROPOSED CASING PROGRAM**

All casing used to drill this well will be new casing.
13 3/8", 54.5 #/ft K-55 - 0' - 84' - Cemented to Surface
8-5/8", 24#/ft, K-55, STL (Thread type) 0'-3,000' - Cemented to Surface
5 1/2", 17#/ft, N-80, LTC (Thread type) 0'- 9,750' - Cemented to Surface

5. **OPERATOR'S MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL**

BOP stack has a 3000 PSI working pressure. BOP will be pressure tested to 3,000 PSI before drilling casing cement plug. Pipe rams will be operated daily and blind rams as possible.

G. J. ED
MAY 22 2000
DIVISION OF
OIL, GAS AND MINERAL

6. The well is to be drilled with a KCL mud system maintaining a weight of approximately 9 - 9.7#/gal.
7. An automatic ignitor will not be installed on the blooie line.
8. A 90° bend on the blooie line, located approximately 50' from the wellhead on the pit side past the mud tank will be installed. Total length of the blooie line will remain 100' from the wellhead.

9. **AUXILIARY EQUIPMENT TO BE USED**

1. Kelly Cock.
2. Full opening valve on floor with DRILL PIPE connection for use when Kelly is not in string.

10. **TESTING, LOGGING, AND CORING PROGRAMS TO BE FOLLOWED**

Possible DST in Wasatch Tongue. The logging program will include Dual Lateral/GR log TD to Surface, Density/Neutron - TD - 3,500' possible dipmeter and rotary cores over selected intervals.

11. **ANTICIPATED ABNORMAL PRESSURES OR TEMPERATURES EXPECTED**

No normal pressures are anticipated nor is the area known for abnormal temperatures. The formations to be penetrated do not contain H₂S gas. The anticipated bottom hole pressure is 2,610 PSI.

12. **WATER SUPPLY**

- A. Water to be used for drilling will be hauled Section 32-T6S-R20E. User's Claim - Code #43, Serial #9077.
- B. No pipelines are anticipated. Hauling will be on the road(s) shown in Attachment No. 3.
- C. No water well is anticipated to be drilled at this time.

13. **CEMENT SYSTEMS**

CONDUCTOR

Ready-mix cement to surface.

SURFACE

Tail Slurry: +/-250 sks Class "G" cement, 2% CaCl₂, and .25#/sk flake. Mixed at 15.8 ppg. Yield 1.16 ft³/sk, water 4.96 gal/sk.

Lead Slurry: +/-600 sk 28:72 Poz and 10% gel + 6 lb/sk KOL seal + 3 lb/sk CSE + .5% SM + .25 lb Flake mixed at 11.0 lb/gel yield - 3.37 ft³/sk, excess 100%.

PRODUCTION

Lead Slurry: +/-350 sk 28:72 Poz and 10% gel + 6 lb/sk KOL seal + 3 lb/sk CSE + .5% SM + .25 lb Flake mixed at 11.0 lb/gel yield - 3.37 ft³/sk.

Tail Slurry: +/-770 sk Class G, 10% gypsum, 3% Salt, .2% retarder mixed at 14.8 ppg, yield - 1.47 ft³/sk water - 6.93 gal/sk

MAY 22 2000

DIVISION OF
OIL, GAS AND MINERAL RESOURCES

14. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS**

Starting Date: June 15, 2000
Duration: 20 Days

SURFACE CASING CEMENT PROGRAM

Set 8 5/8" casing in 12 1/4" open hole cement to surface. Volume calculated using 75% excess.

SPACER:

Pump 20 bbls lightly gelled water followed by 5 bbls fresh H₂O ahead of cement to water wet the well bore after air drilling. Displace with fresh water.

CEMENT SYSTEM

± 500 SKS Lead Cement 28:72 Poz (28% Poz: 72% Class C) + 10% gel + 6 lb/sk KOL seal + 3 lb/sk CSE + .5% SM + .25 lb/sk Cello Flake

Weight	11.0 lb/gal
Yield	3.37 ft ³ /sk
Water	20.48 gal/sk
Thickening Time at 118°	5+ hours
Compressive Strength at 80°	24 hrs 375 PSI

± 250 SKS Class G "Tail-In" Cement, 2% CaCl₂, .25#/sk Celloflake.

Weight	15.80 lb/gal
Yield	1.17 ft ³ /sk
Water	4.99 gal/sk
Thickening Time at 118°	1:42 minutes
Compressive Strength at 80°	8 hrs 750 PSI 16 hrs 1800 PSI 24 hrs 2400 PSI

± 100 - 200 sks Top-out cement, 2% CaCl₂, .25#/sk Celloflake

Run 1" tubing in annulus to ± 200' and cement to surface.

CASING HARDWARE:

- 1 Cement Guide Shoe
- 1 Insert Float
- 3 Centralizers
- 1 Stop Ring
- 1 Thread Lock
- 1 Top Wood Plug

MAY 22 2000

DIVISION OF
OIL, GAS AND MINERAL

LONGSTRING CEMENT

Set 5 1/2" casing in a 7 7/8" open hole.
Lease cement slurry to fill from 750' above top pay zone to surface.
Tail cement slurry to fill from TD to 750' above the pay zone.
Both volumes are calculated using 25% excess.

SPACER:

(KCL Mud System) 10 bbl water

Displace with 3% KCL water using .2% L-55 Clay Stabilizer in the first 50 bbls of displacement.

CEMENT SYSTEMS

Lead Slurry

± 350 sks Hi-Lift, 3% Salt, 10#/sk silsonite, .25#/sk Celloflake.

Weight	11.00 lb/gal
Yield	3.42 ft ³ /sk
Water	21.07 gal/sk

Thickening Time at 180°	4 hrs +
Compressive Strengths in 24 hrs	375 PSI
Fluid Loss	240 cc/30 minutes

Tail Slurry

± 700 sks Class G, 10% gypsum, 3% Salt, .2% retarder

Weight	14.8 lb/gal
Yield	1.47 ft ³ /sk
Water	6.93 gal/sk

Thickening Time at 165° BHCT	
Compressive Strength in 12 hrs	845 PSI
24 hrs	1470 PSI

MAY 22 2000

DIVISION OF
OIL, GAS AND MINERAL

Revised November 1990

Date NOS Received: _____

**CONDITIONS OF APPROVAL
FOR THE SURFACE USE PROGRAM OF THE
APPLICATION FOR PERMIT TO DRILL**

Company/Operator: CNG Producing Company

Well Name & Number: Federal #13-30B

Lease Number: U-37246

Location: SW SW Sec. 30 T. 9S R. 19E

Surface Ownership: Bureau of Land Management

NOTIFICATION REQUIREMENTS

- Location Construction - forty-eight (48) hours prior to construction of location and access roads.
- Location Completion - prior to moving on the drilling rig.
- Spud Notice - at least twenty-four (24) hours prior to spudding the well.
- Casing String and Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.
- BOP and Related - twenty-four (24) hours prior to initiating pressure Equipment Tests tests.
- First Production Notice - within five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

MAY 22 2000

DIVISION OF
OIL, GAS AND MINING

B. **THIRTEEN POINT SURFACE USE PROGRAM:**

Multipoint Requirement to Accompany APD

1. Existing Roads - describe the following and provide a legible map, labeled and showing:

- a. Proposed wellsite as staked and access route to location, including distances from point where access route exists establish roads. (Actual staking should include tow directional reference stakes.) The proposed well site is located approximately 44 miles southwest of Vernal, Utah.
- b. Route and distance from nearest town or locatable reference point, such as a highway or county road, to where well access route leaves main road. - From Roosevelt proceed West on Highway 40 to Myton. Turn south on Myton Road and follow to Pleasant Valley and eight miles float road to access road for the Federal #7-25A. Follow to access road on left. From highway to location is approximately 23.8 miles to access road on left.
- c. Access road(s) to location color-coded or labeled. (See Topographic Map A & B for details.)
- d. Plans for improvement and/or maintenance of existing roads. (Appropriate rights-of-way for off lease roads should be attached.)

2. Planned Access Roads--describe the following and provide a map of suitable scale indicating all necessary access roads (permanent and temporary) to be constructed or reconstructed, showing:

- a. Length - .7 of a mile
- b. Width - 30 foot right-of-way with 18 foot running surface maximum.
- c. Maximum grades - 8%
- d. Turnouts - None
- e. Drainage design - Bore pit
- f. Location and size of culverts and/or bridges, and brief description of any major cuts and fills - None
- g. Surfacing material (source) - Native
- h. Necessary gates, cattleguards, or fence cuts and/or modification to existing facilities - A gate will be installed while the well is drilling. If the well is productive then a cattle guard will be installed. If the well is not successful then the gate will remain.

(New or reconstructed roads are to be centerline-flagged at time of location staking.)

All travel will be confined to existing access road rights-of-way.

Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development, (1989).

The road shall be constructed/upgraded to meet the standards of the anticipated traffic flow and all-weather

MAY 22 2000

DIVISION OF
OIL, GAS AND MINERAL

road requirements. Construction/upgrading shall include ditching, draining, graveling, crowning, and capping the roadbed as necessary to provide a well constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot right-of-way will not be allowed. Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

_ Right-of-Way Application needed.

___ The operator/lessee or his/her successor shall be responsible for all maintenance on cattleguards or gates associated with this oil and/or gas operation.

3. Location of Existing Wells - describe the following and provide a map or plat of all wells within a 1 mile radius of the proposed well location showing and identifying existing:

- a. Water wells - None
- b. Abandoned wells - FEDERAL #6-30B
- c. Temporarily abandoned wells - None
- d. Disposal wells - None
- e. Drilling wells - None
- f. Producing wells - RBU #7-25A
- g. Shut-in wells - None
- h. Injection wells - None

4. Location of Existing and/or Proposed Facilities

a. On well pad: Show the following existing area facilities and dimensions to be utilized if the well is successfully completed for production (detail painting plans and color if applicable):

- (1) Tank batteries
- (2) Production facilities
- (3) Oil gathering lines
- (4) Gas gathering lines
- (5) Injection lines
- (6) Disposal lines
- (7) Surface pits - After the well is hydraulically fraced, the well will be flowed back into the surface pits. After first production, a 300 bbl tank will be installed to contain produced waste water. Plans are to run a 2" line from the separator to the 300 bbl tank.

(Indicate if any of the above lines are buried.)

b. Off well pad: Same as above. Off lease flowlines may require rights-of-way or special use permits, check with the District Office Realty Specialist. (Include a diagram of the proposed attendant lines, i.e., flowlines, powerlines, etc., if off well pad location.)

- (1) Proposed location and attendant lines shall be flagged off of well pad prior to archaeological clearance.
- (2) Dimensions of facilities
- (3) Construction methods and materials
- (4) Protective measures and devices to protect livestock and wildlife

Note: Operator has option of submitting information under 4A and B, after well is completed for production, by applying for approval of subsequent operations.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire content of the largest tank within the facility/battery, unless more stringent protective requirements are deemed necessary by the authorized officer.

Tank batteries will be placed on the North side at stakes #1 & #2

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match on of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

The required paint color is Desert Brown

If at any time the facilities located on public land and authorized by the terms of the lease are no longer included in the lease (due to a contraction in the unit or other lease or unit boundary change), BLM will process a change in authorization to the appropriate statute. The authorization will be subject to appropriate rental or other financial obligation as determined by the authorized officer.

5. Location and Type of Water Supply

- a. Show location and type of water supply, either by 1/4, 1/4 section on a map or by written description Per no. 5424 Sec. 34-T3S-R2W
- b. State method of transporting water, and show any roads or pipelines needed.
- c. If water well is to be drilled on lease, so state. _____*The operator will be responsible for acquiring the necessary permit to obtain water to be used for drilling activities.

6. Source of Construction Materials

- a. Show information either on map or by written description - Surface and subsoil materials in the immediate area will be utilized to build the location

MAY 22 2000

DIVISION OF
L. GAS AND MIN.

- b. Identify if from Federal or Indian (tribal or allotted) land. The use of materials under BLM jurisdiction will conform with 43 CFR 3610.2.3. Construction material will not be located on lease.
- c. Describe where materials such as sand, gravel, stone, and soil material are to be obtained and used. No construction materials will be removed from Federal land.

*If fill materials are needed to construct roads or well sites, proper permits must be obtained from the Surface Management Agency, unless materials are obtained from a private source.

*A mineral materials application (is/is not) required.

7. Methods of Handling Waste Disposal

- a. Describe methods and location of proposed safe containment and disposal of each type of waste material, including:

- (1) Cuttings - bury in pit
- (2) Sewage - haul to sewer lagoon
- (3) Garbage (trash) and other waste material - haul to disposal
- (4) Salts - not used
- (5) Chemicals - non-toxic only; evaporate in pit

After first production, produced waste water will be confined to an unlined or lined pit or storage tank for a period not to exceed ninety (90) days. During the 90 day period, in accordance with Onshore Order No. 7, an application for approval of a permanent disposal method and location, along with the required water analysis, will be submitted for the AO's approval. Failure to file an application within the time allowed will be considered an incident of noncompliance.

- b. Provide a plan for eventual disposal of drilling fluids and any produced oil or water recovered during testing operations. evaporate in pit

After initial clean up period, a 300 bbls tank will be installed to contain produced waste water. This water will be transported from the 300 bbl tank to CNG disposal well located at RBU 16-19F for disposal.

*Burning will not be allowed. All trash must be contained in a trash cage and hauled away to an approved disposal site at the completion of the drilling activities.

- c. No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of wells with the NBU. Furthermore, extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will not be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of wells within the NBU. Specific APDs shall address any modifications from this policy.

On BLM administered lands:

The reserve pit shall be constructed so as not to leak, break, or allow discharge.

MAY 22 2000

DIVISION OF
LAND MANAGEMENT

The reserve pit shall be lined with a 12 mil pit liner only under the following conditions:

1. If we have to blast the pit, or
 2. If the non-blasted pit will not hold fluid.
- If these conditions do not exist, we will not line the pit.

If a plastic nylon reinforced liner is used, it will be a minimum of 12 mil in thickness.

After first production, produced waste water will be confined to a lined pit or storage tank for a period not to exceed ninety (90) days. During the 90 day period, in accordance with NTL-2B, an application for approval of a permanent disposal method and location, along with required water analysis, shall be submitted for the AO's approval. Failure to file an application within the time allowed will be considered an incident of noncompliance.

8. Ancillary Facilities

Camp facilities or airstrips will not be allowed unless otherwise approved.

9. Well Site Layout--provide a plat (not less than 1" = 50') showing:

- a. Cross-sections of proposed drill pad with approximate cuts and fills and the relation to topography.
- b. Location of mud tanks, reserve, and flare pits, pipe racks, living facilities, and soil material stockpiles, etc. (Approval as used in this section means field approval of location.)
- c. Rig orientation, parking areas, and access roads, etc.

The reserve pit will be located on the: south side between stakes #4 & #5

The flare pit will be located downwind of the prevailing wind direction on the stake #5 a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled topsoil (first four inches) will be stored on the: between stakes #5 & #6 and #6 & #7

Access to the well pad will be from the: North off stake #8

___ Diversion ditch(es) shall be constructed on the _____ side of the location (above / below) the cut slope, draining to the _____.

___ Soil compacted earthen berm(s) shall be placed on the _____ side(s) of the location between the _____.

___ The drainage(s) shall be diverted around the _____ side(s) of the well pad location.

___ The reserve pit and/or pad location shall be constructed long and narrow for topographic reasons _____.

___ The _____ corner of the well pad will be rounded off _____.

MAY 22 2000

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a. 39-inch net wire shall be used with at least one stand of barbed wire on top of the net wire (barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- b. The net wire shall be no more than 2-inches above the ground. The barbed wire shall be 3-inches above the net wire. Total height of the fence shall be at least 42-inches.
- c. Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.
- d. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- e. All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is to be regularly traveled. If the well is a producer, the cattleguard (shall/shall not) be permanently mounted on concrete bases. Prior to a new road, crossing any fence located on federal land, or any fence between federal land and private land, the operator will contact the BLM, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

10. Plans for Restoration of Surface

a. Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with 43 CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 6 months from the date of well completion. Before any dirt work takes place, the reserve pit must be completely dry and all cans, barrels, pipe, etc., will be removed.

Contact appropriate surface management agency for required seed mixture.

MAY 22 2000

DIVISION OF
OIL, GAS AND MINERAL

b. Dry Hole/Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and BLM will attach the appropriate surface rehabilitation conditions of approval.

11. Surface Ownership:

Access Road: Bureau of Land Management Location: Bureau of Land Management

"If the access road and/or location involves private or state agency owned surface, a copy of the surface owners agreement is required prior to approval of the APD."

12. Other Additional Information

- a. The Operator is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator is to immediately stop work that might further disturb such materials, and contact the authorized officer (AO). Within five working days the AO will inform the operator as to :

-whether the materials appear eligible for the National Register of Historic Places;

-the mitigation measures the operator will likely have to undertake before the site can be used (assuming in situ preservation is not necessary); and

-a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wishes, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials may be required. Otherwise, the operator will be responsible to mitigation costs. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

- b. The operator will control noxious weeds along right-of-way for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds may be obtained from the BLM, or the appropriate County Extension Office. On BLM administered land it is required that a Pesticide Use Proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.
- c. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on Federal Lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)
- d. A 2" pipeline is proposed to run approximately 225' and run parallel to the access road until it ties into the main gathering system.

MAY 22 2000

DIVISION OF
CIS AND IT

Additional Surface Stipulations

- ___ No construction or drilling activities shall be conducted between _____ and _____ because of _____
- ___ No surface occupancy will be allowed within 1,000 feet of any sage grouse strutting ground.
- ___ No construction or exploration activities are permitted within 1.5 mile radius of sage grouse strutting grounds from April 1 to June 30.
- ___ There shall be no surface disturbance within 600 feet of live water (includes stock tanks, springs, and guzzlers).
- ___ No cottonwood trees will be removed or damaged.
- ___ A silt catchment dam and basin will be constructed according to BLM specifications, where flagged.
- ___ _____
- ___ _____
- ___ _____

13. Lessee's or Operators Representative and Certification

Representative

Name: _____

Address: _____

Phone No: _____

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved plan of operations, and any applicable Notice to Lessees. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

A complete copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.

The operator or his/her contractor shall contact the BLM Office at (801) 789-1362 forty-eight (48) hours prior to construction activities.

The BLM Office shall be notified upon site completion prior to moving on the drilling rig.

MAY 22 2000


DIVISION OF
OIL, GAS AND MINERAL

CNG PRODUCING COMPANY

LOCATION LAYOUT FOR


FEDERAL #13-30B
SECTION 30, T9S, R19E, S.L.B.&M.

1000' FSL 900' FWL



SCALE: 1" = 50'
DATE: 05-01-00
Drawn By: D.R.B.

Approx. Top of Cut Slope

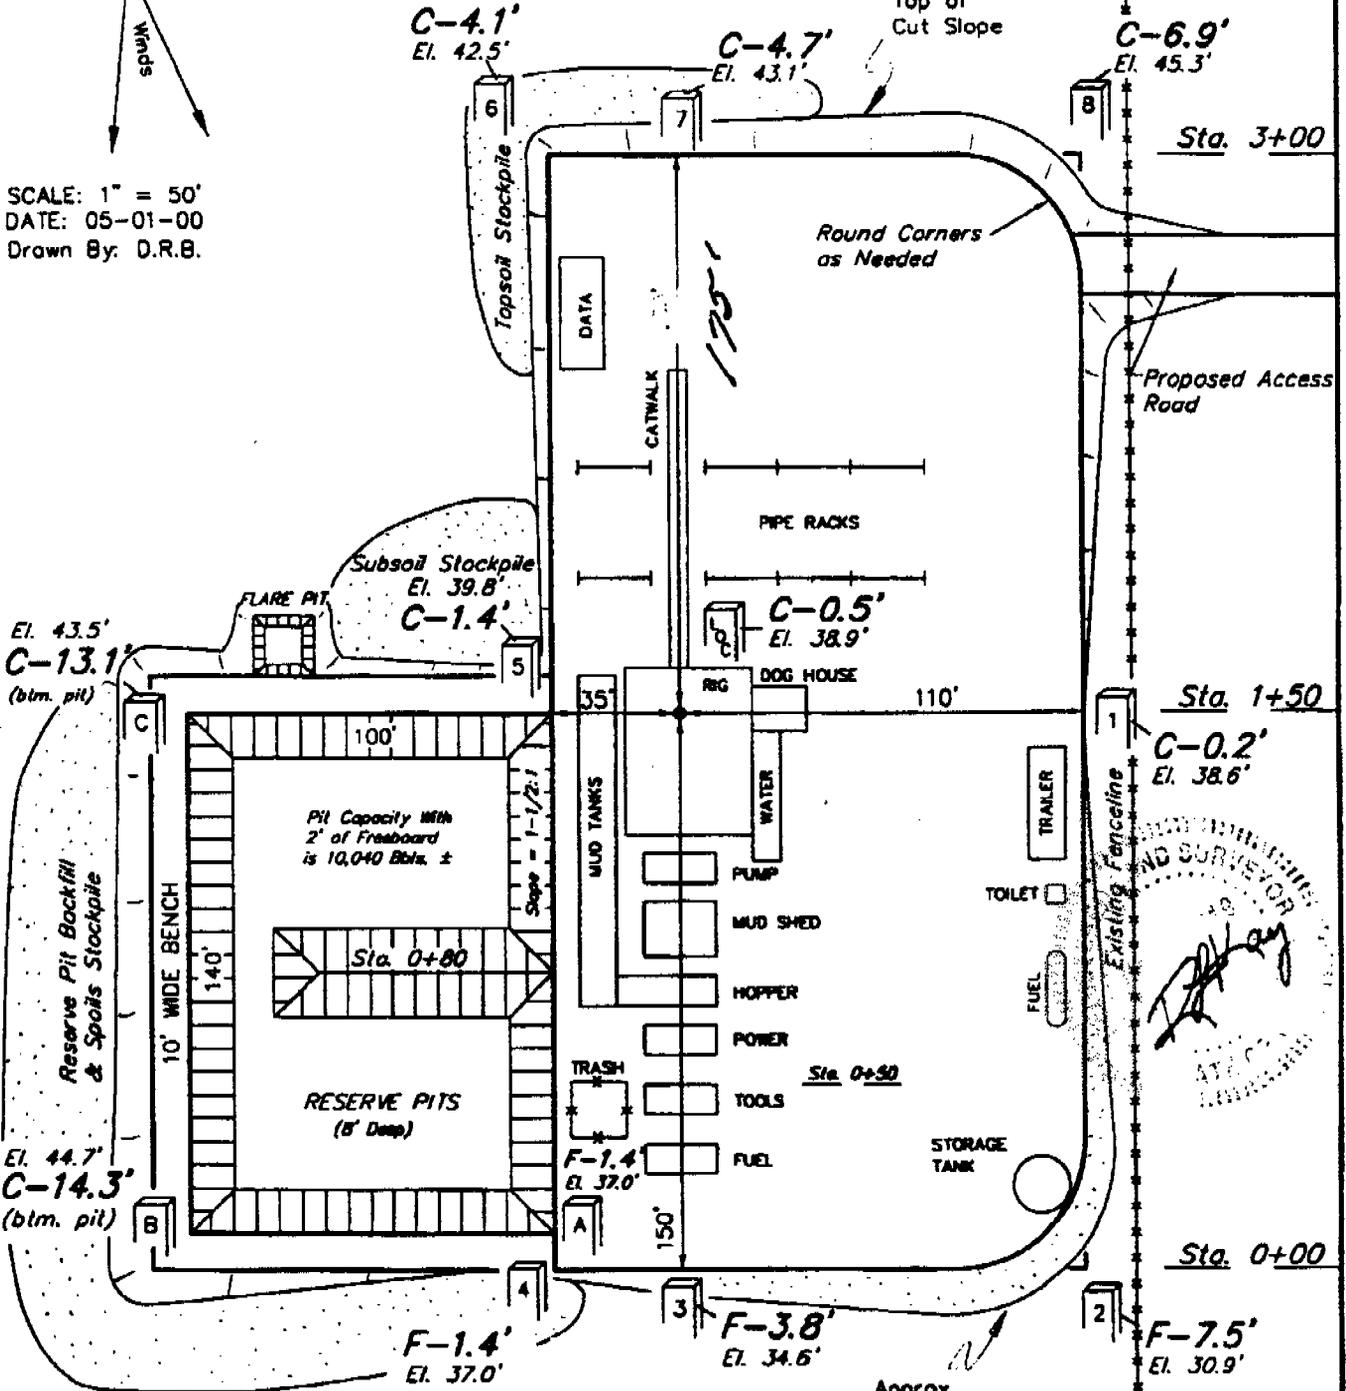

APPROVED
LAND SURVEYOR
[Signature]
[Stamp]

Approx. Toe of Fill Slope

MAY 22 2000

DIVISION OF LAND SURVEYING

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Ferris, Utah 84708 • (435) 789-1077

Elev. Ungraded Ground at Location Stake = 4838.9'
Elev. Graded Ground at Location Stake = 4838.4'

CNG PRODUCING COMPANY


TYPICAL CROSS SECTIONS FOR

FEDERAL #13-30B
SECTION 30, T9S, R19E, S.L.B.&M.
1000' FSL 900' FWL

UNIVERSITY OF UTAH
LAND SURVEYING
DEPARTMENT
[Signature]

1" = 20'
X-Section
Scale
1" = 50'

DATE: 05-01-00
Drawn By: D.R.B.

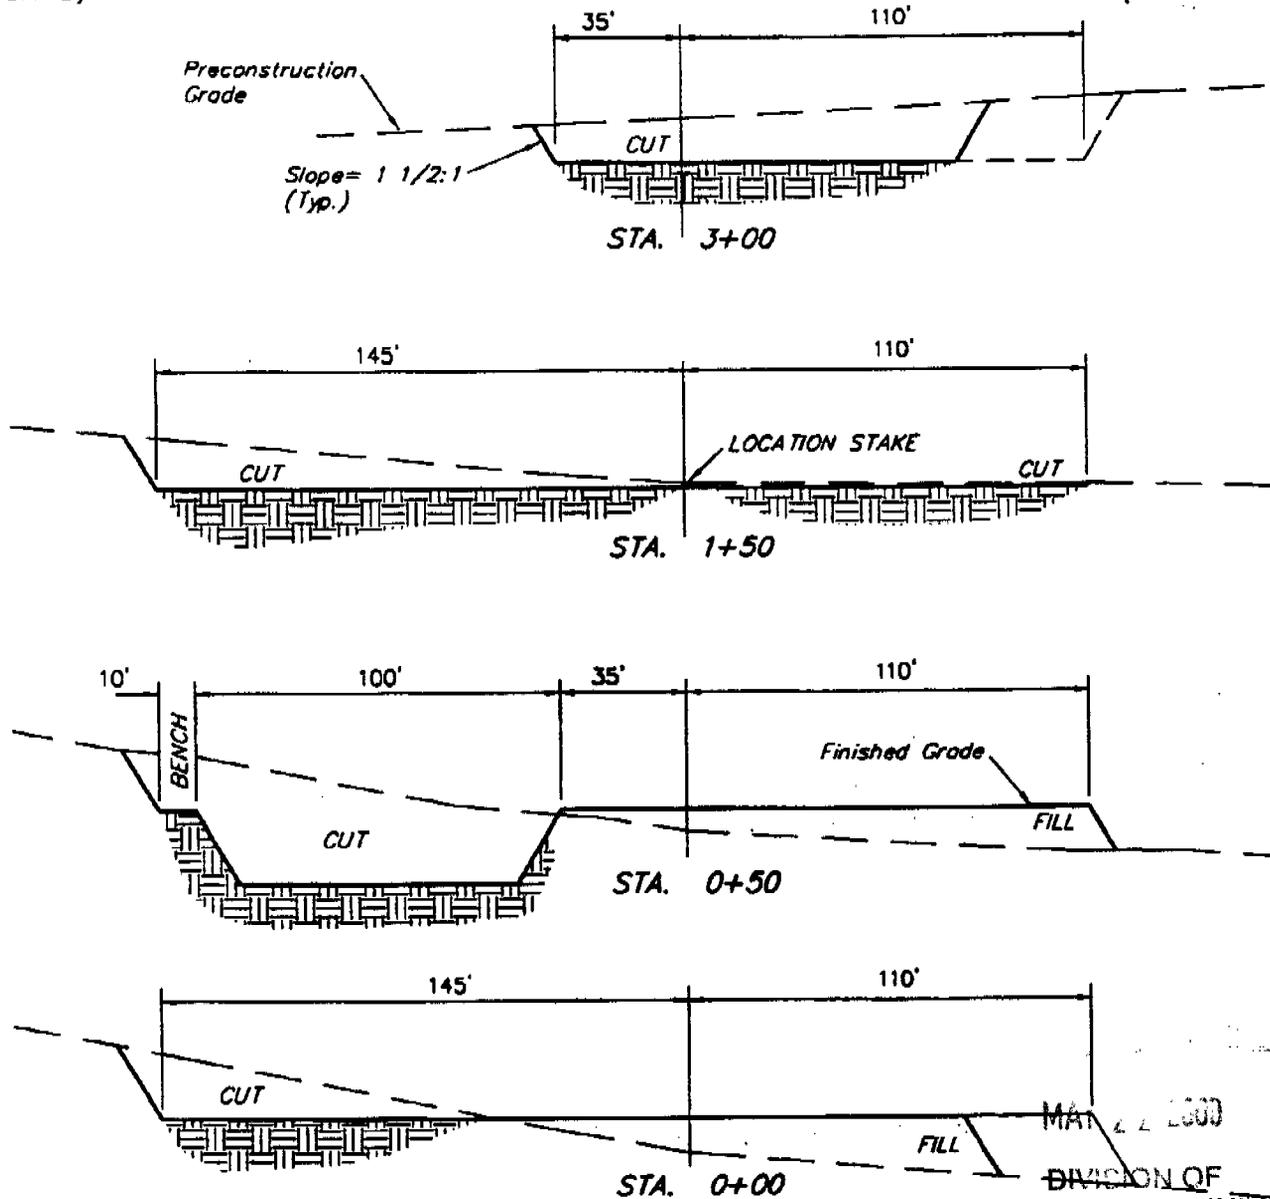


APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,130 Cu. Yds.
Remaining Location	= 7,160 Cu. Yds.
TOTAL CUT	= 8,290 CU.YDS.
FILL	= 2,350 CU.YDS.

EXCESS MATERIAL AFTER 5% COMPACTION	= 5,820 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 2,660 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 3,160 Cu. Yds.

UNIVERSITY OF UTAH
LAND SURVEYING
DEPARTMENT
MAY 2 2000
DIVISION OF
LAND AND MINERAL
SURVEYING
UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

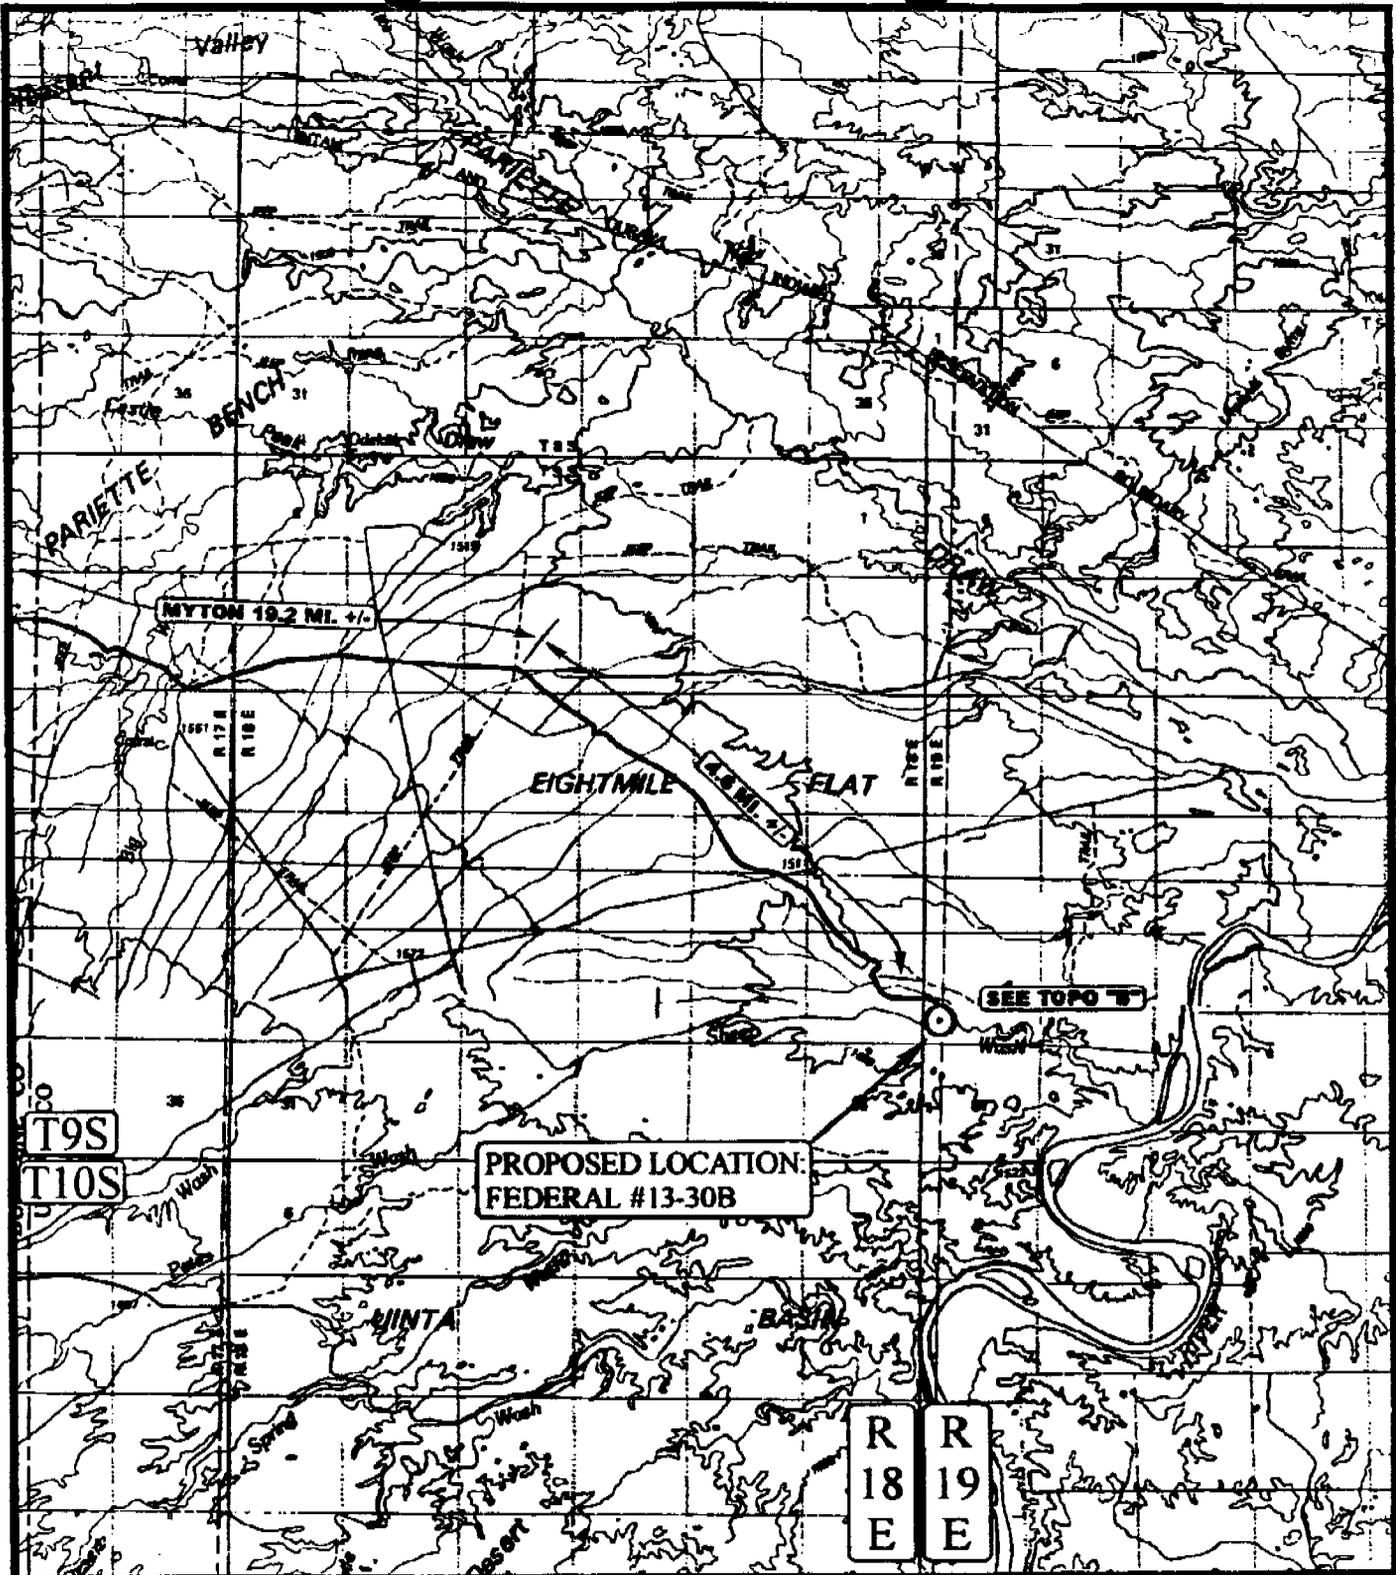

LEGEND:

○ PROPOSED LOCATION

N




FEDERAL #13-30B
SECTION 30, T9S, R19E, S.L.B.&M.
1000' FSL 900' FWL



Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP
5 1 00
MONTH DAY YEAR
SCALE: 1" = 100,000' DRAWN BY: J.L.G. REVISED: 03-03-03



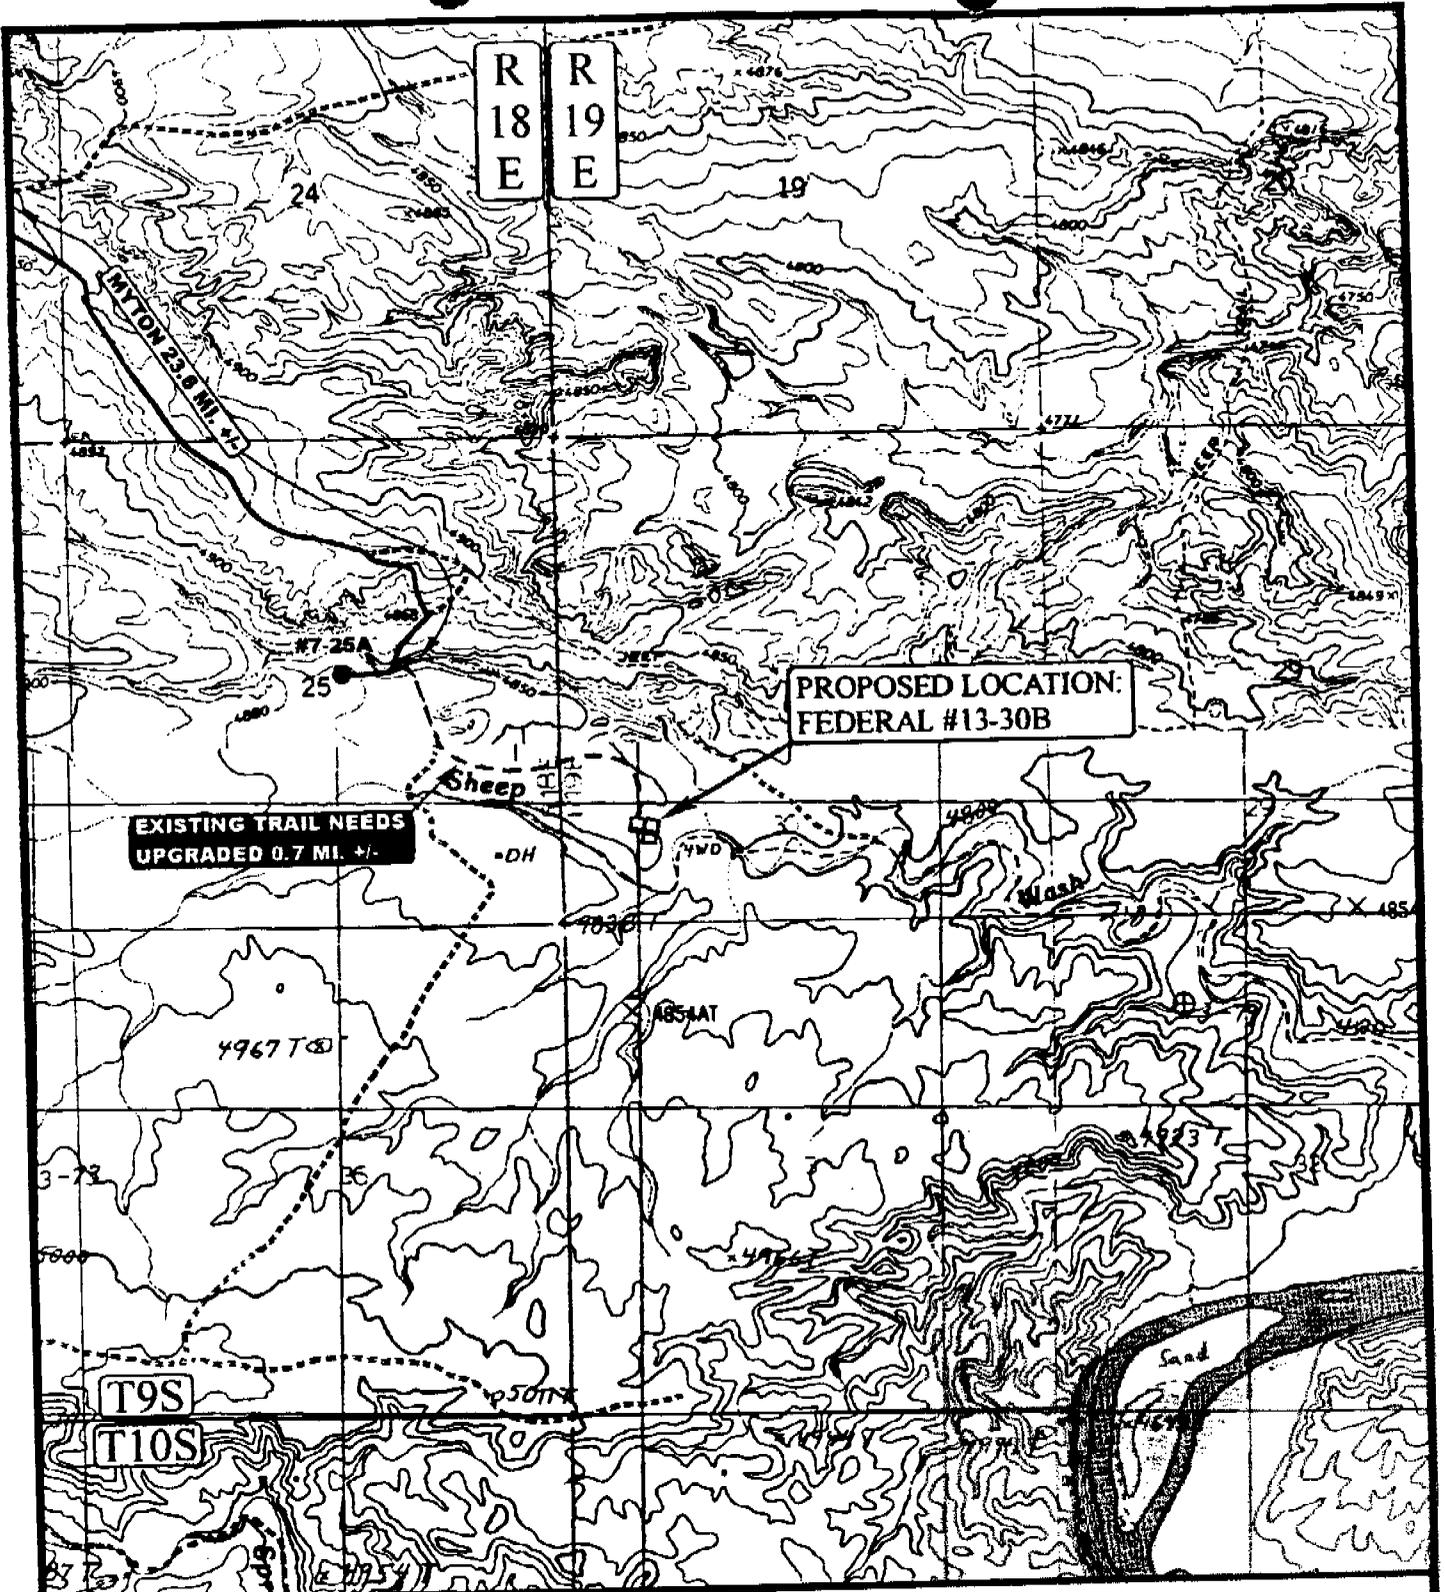

LEGEND:

- - - - - PROPOSED ACCESS ROAD
- EXISTING ROAD



FEDERAL #13-30B
 SECTION 30, T9S, R19E, S.L.B.&M.
 1000' FSL 900' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 • FAX (435) 789-1813

TOPOGRAPHIC
 MAP

5	1	00
MONTH	DAY	YEAR


B

SCALE: 1" = 2000' DRAWN BY: I.L.G. REVISED: 00-00-00




LEGEND

- = Oil Line
- G = Gas Line
- W = Water Line
- R = Relief Line (Pressure)
- C = Condensate Line
- V = Vent Line
- D = Drain Line
- M = Gas Meter
- P = Pump
- BP = Back Pressure Valve
- SWS = Sealed When Shipping
- SUS = Sealed Unless Shipping
- T = Heat Traced Line
- H = Heater
- BL = Buried Line
- ⊗ = Valve
- ⤴ = Check Valve
- SC = Sealed Closed Valve
- NC = Normally Closed
- BD = Blowdown Line

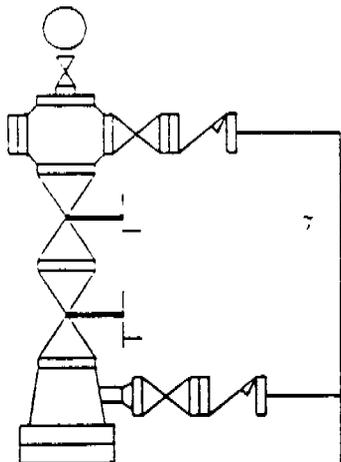

WELLHEAD (typ)

BL, G, C, W
(± 100')

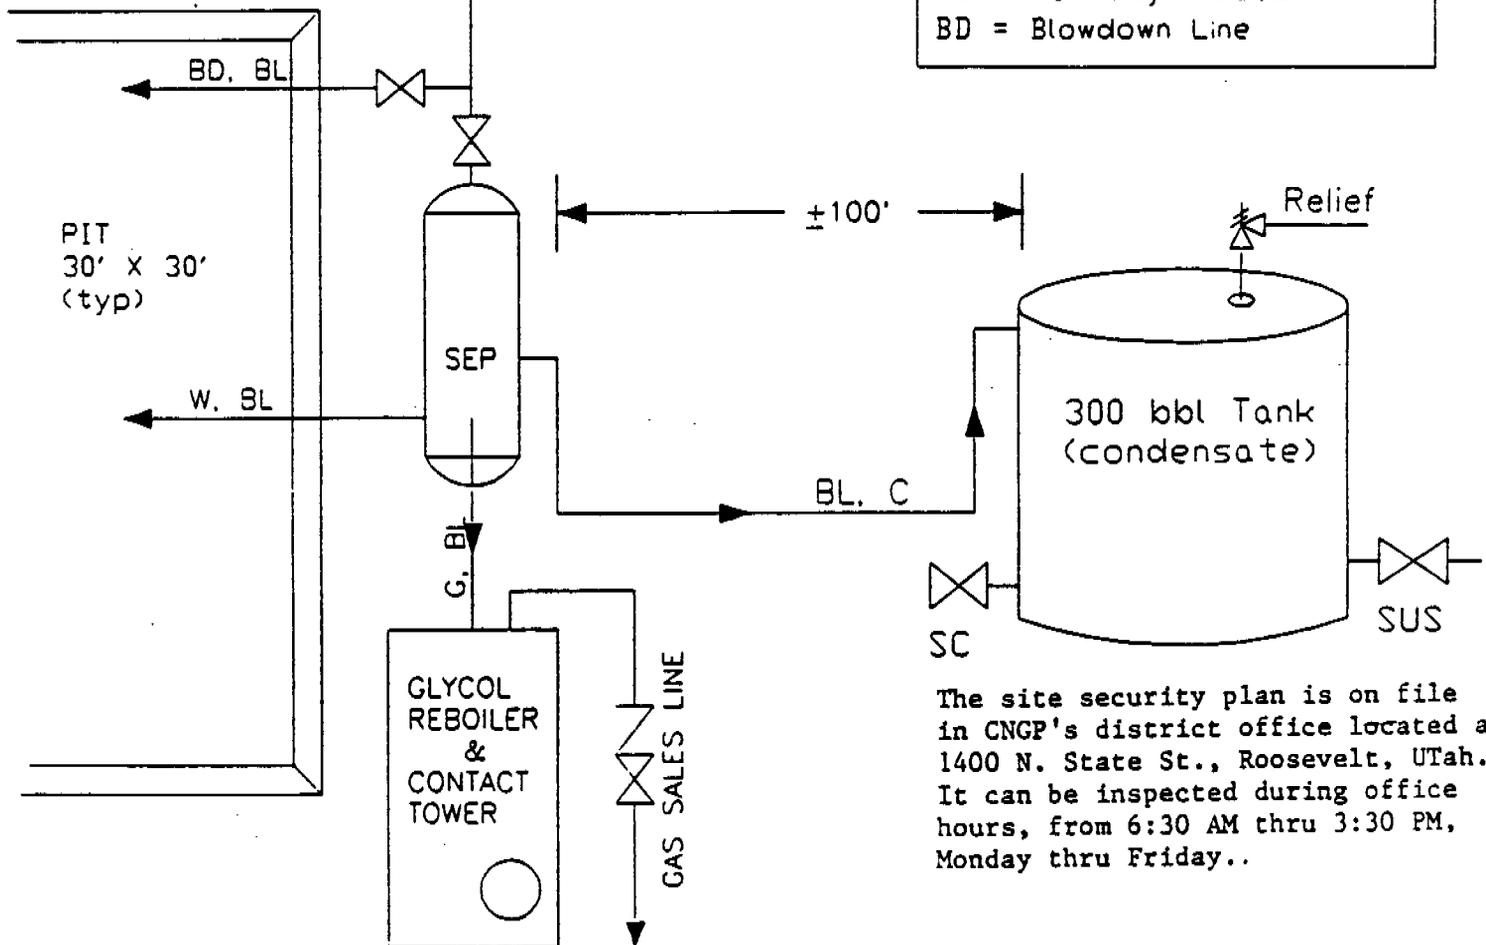

The site security plan is on file in CNGP's district office located at 1400 N. State St., Roosevelt, UTah. It can be inspected during office hours, from 6:30 AM thru 3:30 PM, Monday thru Friday..

CNG PRODUCING COMPANY

Well: Fed 13-30B

RIVER BEND FIELD, UINTA COUNTY

not to scale

SDPA RBU FLOW SEP

TYPICAL FLOW DIAGRAM

date: 5 /19/00

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 05/22/2000

API NO. ASSIGNED: 43-047-33581

WELL NAME: FEDERAL 13-30B
 OPERATOR: CNG PRODUCING (N0605)
 CONTACT: DAVID LINGER

PHONE NUMBER: 281-873-1561

PROPOSED LOCATION:

SWSW 30 090S 190E
 SURFACE: 1000 FSL 0900 FWL
 BOTTOM: 1000 FSL 0900 FWL
 UINTAH
 PARIETTE BENCH (640)

LEASE TYPE: 1-Federal
 LEASE NUMBER: U-37246
 SURFACE OWNER: 1-Federal

PROPOSED FORMATION: MVRD

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

RECEIVED AND/OR REVIEWED:

Plat
 Bond: Fed Ind[] Sta[] Fee[]
 (No. 5247050)
 Potash (Y/N)
 Oil Shale (Y/N) *190 - 5 (B)
 Water Permit
 (No. 5424)
 RDCC Review (Y/N)
 (Date: _____)
 Fee Surf Agreement (Y/N)


LOCATION AND SITING:

____ R649-2-3. Unit _____
 ____ R649-3-2. General
 Siting: _____
 ____ R649-3-3. Exception
 ____ Drilling Unit
 Board Cause No: _____
 Eff Date: _____
 Siting: _____
 ____ R649-3-11. Directional Drill

COMMENTS:

STIPULATIONS:

① FEDERAL APPROVAL



Utah Oil Gas and Mining


Serving the Industry, Protecting the Environment

OPERATOR: CNG PRODUCING COMPANY (N0605)

FIELD: PARIETTE BENCH (640)

SEC. 33, T 9 S, R 19 E,

COUNTY: UINTAH STATE SPACING

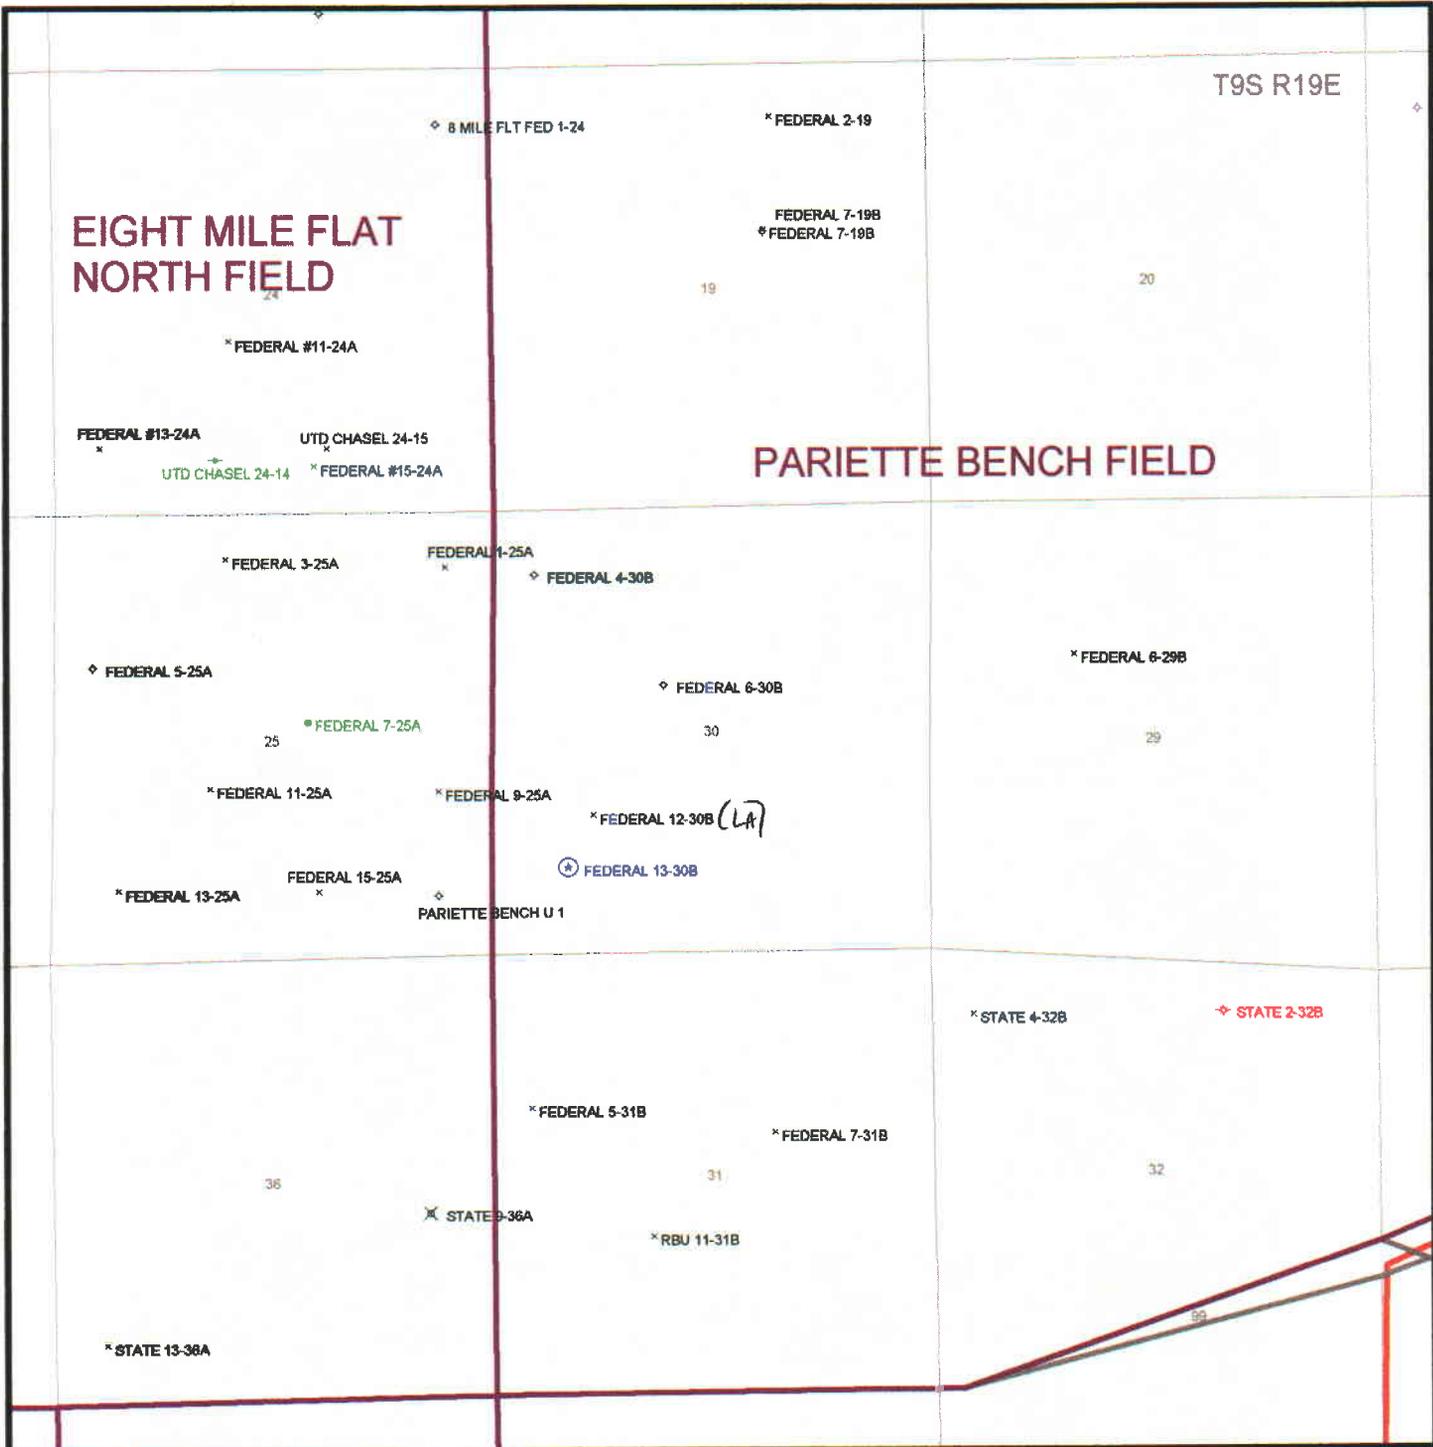

PREPARED
DATE: 2-JUN-2000



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt
Governor
Kathleen Clarke
Executive Director
Lowell P. Braxton
Division Director

1594 West North Temple, Suite 1210
PO Box 145801
Salt Lake City, Utah 84114-5801
801-538-5340
801-359-3940 (Fax)
801-538-7223 (TDD)

June 12, 2000

CNG Producing Company
1450 Poydras Street
New Orleans, LA 70112-6000

Re: Federal 13-30B Well, 1000' FSL, 900' FWL, SW SW, Sec. 30, T. 9 South, R. 19 East,
Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-33581.

Sincerely,

for John R. Baza
Associate Director

er

Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: CNG Producing Company

Well Name & Number Federal 13-30B

API Number: 43-047-33581

Lease: U-37246

Location: SW SW Sec. 30 T. 9 South R. 19 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338
- Contact Robert Krueger at (801) 538-5274.

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval which must be obtained prior to drilling.

**CNG Producing
Company**

A **CNG** COMPANY

CNG Tower
1150 Poydras Street
New Orleans, LA 70112-0000
(504) 593-7000

June 7, 2000

Ms. Lisha Cordova
Utah Board of Oil Gas & Mining
1594 West North Temple
Suite 1210
Salt Lake City, UT 84114-5801

RE: Federal #13-30B
Sec. 30-T9-R19E
Uintah County, Utah

Dear Lisha:

CNG Producing Company would like to request a spacing exception for the above well due to topography. The well location is 900' ~~FEL~~^W & 1,000' FSL of Section 30-T9S-R19E.

The well is located in Section 30-T9S-R19E. CNG Producing Company is the sole operator/owner within a 460' radius of this well and is 2,400' from the nearest well in this area.

If you have any questions or need any further information, please feel free to contact me at (504) 593-7260.

Sincerely,

CNG PRODUCING COMPANY

Susan H. Sachitana

Susan H. Sachitana
Regulatory Reports Administrator

cc: Nelda Decker
Well History

RECEIVED

JUN 12 2000

DIVISION OF
OIL, GAS AND MINING

**CNG Producing
Company**

A **CNG** COMPANY

CNG Tower
1450 Poydras Street
New Orleans, LA 70112-6000
(504) 593-7000

June 21, 2000

CONFIDENTIAL

Mr. Ed Forsman
Dept. of the Interior
Bureau of Land Management
Vernal District Office
170 South 500 East
Vernal, UT 84078

RE: Amend casing depth
Federal #13-30B Sec. 30-T9S-R19E

Dear Ed:

Enclosed please find an original and two copies of our sundry notices requesting permission to amend the casing depth on the 8 5/8" casing from 3,000' to 3,850'.

If you have any questions or need any further information, please feel free to contact me at (504) 593-7260 or our District Manager, Mitch Hall, at (435) 722-4521.

Sincerely,

CNG PRODUCING COMPANY



Susan H. Sachitana
Regulatory Reports Administrator

cc: **Utah Board of Oil, Gas & Mining**
David Linger
Nelda Decker
Mitch Hall
Well History Files

FILED

**DIVISION
OIL, GAS & MINING**

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

CONFIDENTIAL

FORM APPROVED
OMB No. 1004-0135
EXPIRES: July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instruction on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. U-37246
2. Name of Operator CNG PRODUCING COMPANY		6. If Indian, Allottee or Tribe Name
3a. Address 1450 POYDRAS ST, NEW ORLEANS, LA 70112-6000	3b. Phone No. (include area code) (504) 593-7000	7. If Unit or CA/ Agreement, Name and/or No.
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 900' FWL & 1,000' FSL of Sec. 30-T9S-R19E		8. Well Name and No. FEDERAL #13-30B
		9. API Well No. 43-047-33581
		10. Field and Pool, or Exploratory Area NATURAL BUTTES 630
		11. County or Parish, State UINTAH, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>DEEPEN CASING DEPTH</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandonment	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation have been completed, and the operator has determined that the site is ready for final inspection.)

CNG Producing Company request permission to amend the permit to drill by setting the 8 5/8" K-55 24# casing at 3,850' instead of 3,000' as originally requested in our application to drill.

RECEIVED
JUL 27 1996
DIVISION OF
OIL, GAS AND MINING

14. I hereby certify that the forgoing is true and correct Name (Printed/Typed) SUSAN H. SACHITANA	Title REGULATORY REPORTS ADMINISTRATOR
Signature <i>Susan H. Sachitana</i>	Date 20000621

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

**Accepted by the
Utah Division of
Oil, Gas and Mining**

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

FOR RECORD ONLY

*Federal Approval of this
Action is Necessary*

COPY SENT TO OPERATOR
Date: 06-29-00
Initials: CHP

STATE OF UTAH
DIVISION OF OIL, GAS & MINING

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, deepen existing wells or to reenter plugged and abandoned wells.
Use APPLICATION FOR PERMIT TO DRILL OR DEEPEN form for such proposals.

5. Lease Designation and Serial Number:
VARIOUS

6. If Indian, Allottee or Tribe Name:

7. Unit Agreement Name:

8. Well Name and Number:
VARIOUS

9. API Well Number

10. Field and Pool, or Wildcat:
Natural Buttes 630

1. Type of Well :

OIL GAS OTHER:

2. Name of Operator:
DOMINION EXPLORATION & PRODUCTION, INC.

3. Address and Telephone Number:
1460 Poydras Street, New Orleans, LA 70112-6000 (504) 593-7260

4. Location of Well

Footages:
QQ, Sec. T., R., M.:

County: UINTAH
State: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

NOTICE OF INTENT
(SUBMIT IN DUPLICATE)

SUBSEQUENT REPORT
(Submit Original Form Only)

- Abandon
- Repair Casing
- Change of Plans
- Convert to Injection
- Fracture Treat or Acidize
- Multiple Completion
- Other
- New Construction
- Pull or Alter Casing
- Recomplete
- Reperforate
- Vent or Flare
- Water Shut-Off

- Abandon*
- Repair Casing
- Change of Plans
- Convert to Injection
- Fracture Treat or Acidize
- Other OPERATOR NAME CHANGE FOR WELLS
- New Construction
- Pull or Alter Casing
- Reperforate
- Vent or Flare
- Water Shut-Off

Date of work completion _____


Report results of Multiple Completion and Recompletion to different reservoirs on WELL
COMPLETION OR RECOMPLETION REPORT AND LOG form.

*Must be accompanied by a cement verification report.

Approximate date work will start _____

12. DESCRIBE PROPOSED OR COMPLETION OPERATIONS (Clearly State all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Please be advised that effective April 12, 2000, CNG Producing Company has changed its name to Dominion Exploration & Production, Inc. and would like to transfer the well permits into the name of Dominion Exploration & Production, Inc. Our new bond has been filed and is pending approval with the State of Utah. The bond number is 76S 63050 361.


John R. Lewis
Sr. Vice-President - CNG Producing Company


RECEIVED

JUN 29 2000

DIVISION OF
OIL, GAS AND MINING

13.

Name & Signature:


John R. Lewis

Title: Sr. Vice-President - Dominion Expl. & Prod., Inc.

Date: June 26, 2000

(This space for State use only)

Dominion Exploration & Production, Inc.
1450 Poydras Street, New Orleans, LA 70112-6000
Phone: 504-593-7000



June 27, 2000

Mr. Jimmy Thompson
Utah Board of Oil Gas & Mining
1594 West North Temple
Suite 1210
Salt Lake City, UT 84114-5801

RE: Name Change Documentation for CNG Producing Company

Dear Mr. Thompson:

CNG Producing Company has become Dominion Exploration & Production, Inc. effective April 12, 2000. Enclosed please find a sundry regarding the name change with an attached listing of all the permits in the name of CNG Producing Company to be changed to Dominion Exploration & Production, Inc. Also enclosed please find a Form UIC 5 for the Transfer of Authority to Inject for the Federal #1-26B well.

If you have any questions or require any additional information, please contact me at (504) 593-7260.

Sincerely,

DOMINION EXPLORATION & PRODUCTION, INC.

Susan H. Sachitana
Regulatory Reports Administrator

Enclosure

cc: Nelda Decker

RECEIVED

JUN 29 2000

DIVISION OF
OIL, GAS AND MINING

552894
CO 106990



State of Utah
DEPARTMENT OF COMMERCE
Division of Corporations & Commercial Code

File Number

Check Appropriate Box	
<input checked="" type="checkbox"/>	Foreign Profit Corporation \$35.00
<input type="checkbox"/>	Foreign Non-Profit Corporation \$35.00
<input type="checkbox"/>	Foreign Limited Partnership \$25.00
<input type="checkbox"/>	Foreign Limited Liability Company \$35.00

**Application To Amend The
CERTIFICATE OF AUTHORITY OR
REGISTRATION of**

CNG Producing Company
Business Entity Name

Delaware
Name of Home State

I. AMENDING THE BUSINESS NAME

The business name is changed to: Dominion Exploration & Production, Inc.
The corporation shall use as its name in Utah: Dominion Exploration & Production, Inc.

(The corporation shall use its name as set forth on it, unless this name is not available)

NOTE: If the business name has changed its name in the home state, a copy of the Certificate of Amendment or a certified copy of the amendment must accompany this application.

Check the following:

- The name of the corporation is changing its name in Utah to the new name of the corporation in the home state.
- The name of the corporation is being changed in Utah to comply with Utah State Insurance Regulations.

II. AMENDING THE DURATION OF THE BUSINESS EXISTENCE

The businesses period of duration is changed to: _____

III. AMENDING THE STATE OR COUNTRY OF INCORPORATION/REGISTRATION

The corporation's state or country of incorporation/registration is changed to: _____

IV. Other: _____
(Limited Partnership changing General Partners, Limited Companies changing Members or Managers, Change of statement who is managing, etc.)
Use an attached sheet if needed.

Under penalties of perjury, I declare this Application to Amend the Certificate of Authority or Registration to be, to the best of my knowledge and belief, true and correct.

[Signature] Vice President & Corporate Secretary April 20, 2000
Signature Title Date

State of Utah
Department of Commerce
Division of Corporations and Commercial Code

I hereby certify that the foregoing has been filed and approved on this 25 day of April, 2000 in the office of this Division and hereby issue this Certificate thereof.

Examiner [Signature] Date 7/1/00



[Signature]
Date: 04/25/2000

Receipt Number: 22156

Amount Paid: \$50.00

STATE OF UTAH
DIVISION OF CORPORATIONS
AND COMMERCIAL CODE
160 East 300 South / Box 146705
Salt Lake City, UT 84114-6705
Service Center: (801) 530-4849
Web Site: <http://www.commerce.state.ut.us>

FILED

APR 25 2000



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

In Reply Refer To:
3100
U-01470-A et al
(UT-932)

JUN 2 2000

NOTICE

Dominion Exploration & Production, Inc. : Oil and Gas Leases
1450 Poydras Street :
New Orleans, LA 70112-6000 :

Name Change Recognized

Acceptable evidence has been received in this office concerning the change of name of CNG Producing Company to Dominion Exploration & Production, Inc. on Federal oil and gas leases.

The oil and gas lease files identified on the enclosed exhibit have been noted as to the name change. The exhibit was compiled from your list of leases and a list of leases obtained from our automated records system. We have not abstracted the lease files to determine if the entity affected by the name change holds an interest in the leases identified nor have we attempted to identify leases where the entity is the operator on the ground maintaining no vested record title or operating rights interests. We are notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the name change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

The following lease on your list is closed on the records of this office: U-029277.

Due to the name change, the name of the principal on the bond is required to be changed from CNG Producing Company to Dominion Exploration & Production, Inc. on Bond No. 524 7050 (BLM Bond No. WY1898). You may accomplish this name change either by consent of the surety on the original bond or by a rider to the original bond. Otherwise, a replacement bond with the new name should be furnished to the Wyoming State Office.

/s/ Robert Lopez

Robert Lopez
Chief, Branch of
Minerals Adjudication

Enclosure
Exhibit of Leases

RECEIVED

JUN 05 2000

DIVISION OF
OIL, GAS AND MINERAL

cc: Wyoming State Office
New Mexico State Office
Moab Field Office
Vernal Field Office
MMS-Reference Data Branch, MS 3130, Box 5860, Denver, CO 80217
State of Utah, DOGM, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC, UT 84114-5801
Irene Anderson (UT-932)
Teresa Thompson (UT-931)
LaVerne Steah (UT-942)


Well Name	Api Well Code	Operator Name	Production Status	Lease Type
AMY THORPE - USA 1	4303731283	DOMINION EXPLORATION & PR	LA	BLM
KENNETH TAYLOR - USA 1	4303731284	DOMINION EXPLORATION & PR	LA	BLM
TRUDI FED 2-17	4303731453	DOMINION EXPLORATION & PR	PA	BLM
MAJOR MARTIN FED 1	4303731479	DOMINION EXPLORATION & PR	PA	BLM
OSC #3 *	4304730104	DOMINION EXPLORATION & PR	PA	BLM
OSC #5-2 *	4304730129	DOMINION EXPLORATION & PR	PR	STATE
NATURAL #1-2 - R B U	4304730153	DOMINION EXPLORATION & PR	PA	BLM
RBU #11-21E	4304730414	DOMINION EXPLORATION & PR	PA	BLM
RBU #11-36B	4304730583	DOMINION EXPLORATION & PR	DA	STATE
FEDERAL #1-26A	4304730716	DOMINION EXPLORATION & PR	PA	BLM
FEDERAL #6-30B	4304730733	DOMINION EXPLORATION & PR	PA	BLM
BARTON FEDERAL #1-26	4304731179	DOMINION EXPLORATION & PR	PR	BLM
RBU #6-2D	4304731190	DOMINION EXPLORATION & PR	PR	STATE
RBU #16-2D	4304731353	DOMINION EXPLORATION & PR	PR	STATE
HILL CREEK FEDERAL #1-29 H C U	4304731522	DOMINION EXPLORATION & PR	PR	BLM
RBU #10X-15E	4304731551	DOMINION EXPLORATION & PR	PA	BLM
HILL CREEK STATE #1-32	4304731560	DOMINION EXPLORATION & PR	UNK	STATE
HILL CREEK FEDERAL #1-27	4304731675	DOMINION EXPLORATION & PR	PR	BLM
RBU #11-31B	4304731765	DOMINION EXPLORATION & PR	LA	BLM
STATE #4-36E	4304731777	DOMINION EXPLORATION & PR	PR	STATE
SADDLE TREE DRAW 4-31	4304731780	DOMINION EXPLORATION & PR	LA	BLM
SADDLE TREE DRAW 16-31	4304731781	DOMINION EXPLORATION & PR	LA	BLM
SADDLE TREE DRAW 13-34	4304731782	DOMINION EXPLORATION & PR	LA	BLM
STATE #12-36E	4304731784	DOMINION EXPLORATION & PR	LA	STATE
RBU #3-10D	4304731832	DOMINION EXPLORATION & PR	PA	BLM
RBU #16-19C	4304731841	DOMINION EXPLORATION & PR	DA	BLM
EVANS FEDERAL #3-25	4304731878	DOMINION EXPLORATION & PR	PR	BLM
EVANS FEDERAL #41-26	4304731879	DOMINION EXPLORATION & PR	PR	BLM
STATE #11-36E	4304732019	DOMINION EXPLORATION & PR	PR	STATE
RBU #7-13E	4304732051	DOMINION EXPLORATION & PR	LA	BLM
RBU #7-18F	4304732104	DOMINION EXPLORATION & PR	LA	BLM
RBU #15-15F	4304732109	DOMINION EXPLORATION & PR	LA	BIA
RBU #7-15F	4304732111	DOMINION EXPLORATION & PR	LA	BIA
RBU #7-23E	4304732125	DOMINION EXPLORATION & PR	LA	BLM
RBU #6-19F	4304732126	DOMINION EXPLORATION & PR	LA	BLM
RBU #3-17F	4304732127	DOMINION EXPLORATION & PR	LA	BLM
RBU #15-10E	4304732139	DOMINION EXPLORATION & PR	LA	BLM
RBU #3-15F	4304732140	DOMINION EXPLORATION & PR	LA	BLM
RBU #3-3E	4304732152	DOMINION EXPLORATION & PR	LA	BLM
RBU #5-24E	4304732154	DOMINION EXPLORATION & PR	LA	BLM
RBU #5-17F	4304732165	DOMINION EXPLORATION & PR	LA	BLM
RBU #15-13E	4304732167	DOMINION EXPLORATION & PR	LA	BLM
RBU #3-19FX	4304732216	DOMINION EXPLORATION & PR	LA	BLM
STATE 2-32B	4304732221	DOMINION EXPLORATION & PR	PR	STATE
STATE #5-36B	4304732224	DOMINION EXPLORATION & PR	PR	STATE
FEDERAL #13-26B	4304732237	DOMINION EXPLORATION & PR	PR	BLM
STATE #9-36B	4304732249	DOMINION EXPLORATION & PR	PR	STATE
RBU #11-21F	4304732262	DOMINION EXPLORATION & PR	LA	BLM
RBU #4-15F	4304732269	DOMINION EXPLORATION & PR	PA	BIA
RBU #1-3E	4304732272	DOMINION EXPLORATION & PR	LA	BLM
RBU #16-9E	4304732273	DOMINION EXPLORATION & PR	LA	BLM
RBU #3-10E	4304732291	DOMINION EXPLORATION & PR	PA	BLM
RBU #7-23E	4304732294	DOMINION EXPLORATION & PR	LA	BLM
RBU #13-19F2	4304732311	DOMINION EXPLORATION & PR	LA	BLM
RBU #12-2F	4304732316	DOMINION EXPLORATION & PR	LA	STATE
RBU #7-20E	4304732332	DOMINION EXPLORATION & PR	LA	BLM
RBU #13-34B	4304732334	DOMINION EXPLORATION & PR	PA	BLM
RBU #9-20E	4304732335	DOMINION EXPLORATION & PR	LA	BLM
RBU #7-19F	4304732360	DOMINION EXPLORATION & PR	LA	BLM
RBU #13-23F	4304732361	DOMINION EXPLORATION & PR	LA	BLM
EVANS FEDERAL #12-25A	4304732394	DOMINION EXPLORATION & PR	PR	BLM
EVANS FEDERAL #32-26	4304732395	DOMINION EXPLORATION & PR	PR	BLM
STATE #2-36E	4304732404	DOMINION EXPLORATION & PR	LA	STATE
STATE #9-36E	4304732405	DOMINION EXPLORATION & PR	LA	STATE

RECEIVED

JUN 29 2000

DIVISION OF

Well Name	Api Well Code	Operator Name	Production Status	Lease Type
EVANS FEDERAL #32-25	4304732406	DOMINION EXPLORATION & PR	PR	BLM
RBU #1-25B	4304732445	DOMINION EXPLORATION & PR	LA	BLM
RBU #5-25B	4304732453	DOMINION EXPLORATION & PR	LA	BLM
RBU #11-25B	4304732482	DOMINION EXPLORATION & PR	LA	BLM
RBU #16-14EO	4304732507	DOMINION EXPLORATION & PR	LA	BLM
RBU #8-23EO	4304732508	DOMINION EXPLORATION & PR	LA	BLM
RBU #8-14EO	4304732514	DOMINION EXPLORATION & PR	LA	BLM
RBU #15-13EO	4304732599	DOMINION EXPLORATION & PR	LA	BLM
RBU #9-23EO	4304732601	DOMINION EXPLORATION & PR	LA	BLM
STATE #2-36E	4304732979	DOMINION EXPLORATION & PR	PR	STATE
STATE #2-36E	4304732979	DOMINION EXPLORATION & PR	PR	STATE
STATE #1-36E	4304733181	DOMINION EXPLORATION & PR	PR	STATE
RBU #1-16F	4304733360	DOMINION EXPLORATION & PR	DR	STATE
RBU #5-3F	4304733361	DOMINION EXPLORATION & PR	FUT	BLM
RBU #5-16F	4304733363	DOMINION EXPLORATION & PR	PR	BLM
RBU #10-23F	4304733367	DOMINION EXPLORATION & PR	DR	BLM
EVANS FEDERAL #15-26E	4304733508	DOMINION EXPLORATION & PR	FUT	BLM
EVANS FEDERAL #9-26E	4304733509	DOMINION EXPLORATION & PR	FUT	BLM
EVANS FEDERAL #10-25E	4304733510	DOMINION EXPLORATION & PR	FUT	BLM
EVANS FEDERAL #14-25E	4304733511	DOMINION EXPLORATION & PR	FUT	BLM
FEDERAL #13-30B	4304733581	DOMINION EXPLORATION & PR	FUT	BLM
STATE #13-36A	4304733598	DOMINION EXPLORATION & PR	FUT	STATE
RBU #1-1D	4304733599	DOMINION EXPLORATION & PR	FUT	BLM
OSC #1-17 *	430472030800S1	DOMINION EXPLORATION & PR	SIEC	BLM
OSC #2 *	430473008700S1	DOMINION EXPLORATION & PR	PR	BLM
OSC #4 *	430473011300S1	DOMINION EXPLORATION & PR	TA	BLM
OSC #4A-30 *	430473012200S1	DOMINION EXPLORATION & PR	SIEC	BLM
OSC #7-15E *	430473021100S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #11-16E	430473026000S1	DOMINION EXPLORATION & PR	PR	STATE
RBU #11-18F	430473026600S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #11-13E	430473037400S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #11-15F	430473037500S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #7-21F	430473037600S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #11-19F	430473040500S1	DOMINION EXPLORATION & PR	PR	BLM
FEDERAL #7-25B	430473040600S01	DOMINION EXPLORATION & PR	PR	BLM
RBU #11-10E	430473040800S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #5-11D	430473040900S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #11-14E	430473041000S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #11-23E	430473041100S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #11-16F	430473041200S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #11-17F	430473058400S1	DOMINION EXPLORATION & PR	PA	BLM
RBU #7-11F	430473058500S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #8-16D	4304730608	DOMINION EXPLORATION & PR	PA	STATE
FEDERAL #7-25A	430473062400S01	DOMINION EXPLORATION & PR	PA	BLM
RBU #11-3F	430473068900S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #11-22E	430473069800S1	DOMINION EXPLORATION & PR	PA	BLM
RBU #4-11D	430473071800S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #16-23F	4304730719	DOMINION EXPLORATION & PR	PA	BLM
RBU #7-3E	430473072000S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #11-24E	430473075900S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #11-2F	430473076000S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #7-10F	430473076100S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #6-20F	430473076200S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #7-22F	430473076800S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #8-14F	430473082500S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #2-11D	430473082600S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #16-3F	430473088700S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #1-15E	430473091500S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #1-14E	430473092600S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #1-22E	430473092700S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #1-23E	430473097000S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #4-19F	430473097100S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #13-11F	430473097300S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #1-10E	430473104600S1	DOMINION EXPLORATION & PR	PR	BLM



WAPGW

BLM

BLM

BLM

BLM

BLM

Well Name	Api Well Code	Operator Name	Production Status	Lease Type
RBU #13-24E	430473208300S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #13-35B	430473209400S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #3-21E	430473209500S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #15-17F	430473210300S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #13-19F	430473210500S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #1-21E	430473210700S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #14-2F	430473210800S1	DOMINION EXPLORATION & PR	PR	STATE
RBU #9-21E	430473212800S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #9-17E	430473212900S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #13-14F	430473213300S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #9-11F	430473213400S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #8-2F	430473213600S1	DOMINION EXPLORATION & PR	PR	STATE
RBU #5-16E	430473213700S1	DOMINION EXPLORATION & PR	PR	STATE
RBU #5-21F	430473213800S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #1-20E	430473214600S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #8-18F	430473214900S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #13-23E	430473215300S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #5-24E	430473215400S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #5-14F	430473215600S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #7-15E	430473216600S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #15-13E	430473216700S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #13-10F	430473218900S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #15-10E	430473219000S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #3-17FX	430473219100S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #13-15E	430473219700S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #7-22E	430473219800S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #5-23E	430473219900S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #13-18F	430473220100S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #15-15E	430473221100S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #5-19F	430473221300S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #9-17F	430473221700S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #7-17F	430473221800S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #15-14E	430473221900S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #5-3E	430473222000S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #15-35B	430473222200S1	DOMINION EXPLORATION & PR	PR	BLM
FEDERAL #11-24B	430473222300S1	DOMINION EXPLORATION & PR	PR	BLM
STATE #9-36A	430473222500	DOMINION EXPLORATION & PR	TA	STATE
RBU #9-3E	430473222800S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #7-14E	430473223900S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #9-14F	430473224000S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #13-17F	430473224100S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #5-22E	430473224200S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #15-17E	430473224300	DOMINION EXPLORATION & PR	PA	BLM
RBU #7-16E	430473224500S1	DOMINION EXPLORATION & PR	PR	STATE
FEDERAL #1-26B - GIW	4304732248	DOMINION EXPLORATION & PR	PR	BLM
RBU #13-16E	430473225000S1	DOMINION EXPLORATION & PR	PR	STATE
RBU #8-13E	430473226300S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #9-21F	430473226600S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #5-10F	430473226700S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #9-10F	430473226800S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #14-22F	430473227000S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #9-34B	430473227400S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #5-21E	430473227600S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #7-10E	430473228900S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #5-17F	430473229000S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #15-16E	430473229200S1	DOMINION EXPLORATION & PR	PR	STATE
RBU #3-3E	430473229300S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #13-22E	430473229500S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #7-21E	430473230100S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #15-21F	430473230900S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #15-20F	430473231000S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #9-24E	430473231200S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #3-20F	430473231300S1	DOMINION EXPLORATION & PR	PR	BLM
RBU #10-2F	430473231400S1	DOMINION EXPLORATION & PR	PR	STATE

OPERATOR CHANGE WORKSHEET

<input type="checkbox"/>	4-KAS
2-CDW <input checked="" type="checkbox"/>	5-SLO <input checked="" type="checkbox"/>
3-JLT	6-FILE

Check each listed item when completed. Write N/A if item is not applicable.

Change of Operator (Well Sold) Designation of Agent
X Operator Name Change Only Merger

The operator of the well(s) listed below has changed, effective: 4-12-00

TO:(New Operator) DOMINION EXPL & PROD INC.
 Address: 1450 POYDRAS STREET
NEW ORLEANS, LA 70112-6000
 Phone: 1-(504)-593-7000
 Account No. N1095

FROM:(Old Operator) CNG PRODUCING COMPANY
 Address: 1450 POYDRAS STREET
NEW ORLEANS, LA 70112-6000
 Phone: 1-(504)-593-7000
 Account No. N0605

WELL(S):	CA Nos.	or	Unit
Name: <u>HILL CREEK FEDERAL 1-29</u>	API: <u>43-047-31522</u>	Entity: <u>666</u>	S <u>29</u> T <u>10S</u> R <u>20E</u> Lease: <u>U-28203</u>
Name: <u>FEDERAL 13-30B</u>	API: <u>43-047-33581</u>	Entity: <u>99999</u>	S <u>30</u> T <u>09S</u> R <u>19E</u> Lease: <u>U-37246</u>
Name: _____	API: _____	Entity: _____	S _____ T _____ R _____ Lease: _____
Name: _____	API: _____	Entity: _____	S _____ T _____ R _____ Lease: _____
Name: _____	API: _____	Entity: _____	S _____ T _____ R _____ Lease: _____
Name: _____	API: _____	Entity: _____	S _____ T _____ R _____ Lease: _____
Name: _____	API: _____	Entity: _____	S _____ T _____ R _____ Lease: _____

OPERATOR CHANGE DOCUMENTATION

- YES 1. A pending operator change file has been set up.
- YES 2. (R649-8-10) Sundry or other legal documentation has been received from the **FORMER** operator on 6-29-00.
- YES 3. (R649-8-10) Sundry or other legal documentation has been received from the **NEW** operator on 6-29-00.
- YES 4. The new company has been looked up in the **Department of Commerce, Division of Corporations Database** if the new operator above is not currently operating any wells in Utah. Is the operator registered with the State? **Yes/No** If yes, the company file number is **SEE ATTACHED**. If no, Division letter was mailed to the new operator on _____.
- YES 5. **Federal and Indian Lease Wells.** The BLM or the BIA has approved the merger, **name change** or operator change for all wells listed above involving Federal or Indian leases on 6-2-00.
- N/A 6. **Federal and Indian Units.** The BLM or the BIA has approved the successor of unit operator for all wells listed above involving unit operations on _____.
- N/A 7. **Federal and Indian Communitization Agreements ("CA").** The BLM or the BIA has approved the operator change for all wells listed above involved in the CA on _____.

- N/A 8. **Underground Injection Control ("UIC") Program.** The Division has approved UIC Form 5, Transfer of Authority to Inject, for the enhanced/secondary recovery unit/project and/or for the water disposal well(s) listed above.
- YES 9. Changes have been entered in the **Oil and Gas Information System** for each well listed on 7-21-00.
- YES 10. Changes have been included on the **Monthly Operator Change letter** on 7-21-00.

STATE BOND VERIFICATION

- N/A 1. State Well(s) covered by Bond No. _____.

FEE WELLS - BOND VERIFICATION / LEASE INTEREST OWNER NOTIFICATION

- N/A 1. (R649-3-1) The **NEW** operator of any fee lease well(s) listed above has furnished a proper bond.
- N/A 2. A **copy of this form** has been placed in the **new and former operator's bond files** on _____.
- N/A 3. The **FORMER** operator has requested a release of liability from their bond as of today's date _____? If yes, Division response was made to this request by letter dated _____. (see bond file).
- N/A 4. (R649-2-10) The **Former** operator of any Fee lease wells listed above has been contacted and informed by letter dated _____, of their responsibility to notify all interest owners of this change.
- N/A 5. Bond information added to **RBDMS** on _____.
- N/A 6. Fee wells attached to bond in **RBDMS** on _____.

FILMING

- ____ 1. All attachments to this form have been **microfilmed** on 2.23.01.

FILING

- ____ 1. **Originals/Copies** of all attachments pertaining to each individual well have been filed in each **well file**.
- ____ 2. The **original of this form** has been filed in the operator file and a copy in the old operator file.

COMMENTS

**CNG Producing
Company**

A **CNG** COMPANY

CNG Tower
1450 Poydras Street
New Orleans, LA 70112-6000
(504) 593-7000

CONFIDENTIAL

June 30, 2000

Mr. Ed Forsman
Dept. of the Interior
Bureau of Land Management
Vernal District Office
170 South 500 East
Vernal, UT 84078

RE: Amend well depth
Federal #13-30B Sec. 30-T9S-R19E

Dear Ed:

Enclosed please find an original and two copies of our sundry notices requesting permission to amend the total depth on the above well from 9,750' to 10,000'.

If you have any questions or need any further information, please feel free to contact me at (504) 593-7260 or our District Manager, Mitch Hall, at (435) 722-4521.

Sincerely,

CNG PRODUCING COMPANY



Susan H. Sachitana
Regulatory Reports Administrator

cc: **Utah Board of Oil, Gas & Mining**

David Linger
Nelda Decker
Mitch Hall
Well History Files

RECEIVED

JUN 30 2000

DIVISION OF
OIL, GAS AND MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
EXPIRES: July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instruction on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		CONFIDENTIAL	5. Lease Serial No. U-37246
2. Name of Operator CNG PRODUCING COMPANY			6. If Indian, Allottee or Tribe Name
3a. Address 1450 POYDRAS ST, NEW ORLEANS, LA 70112-6000	3b. Phone No. (include area code) (504) 593-7000	7. If Unit or CA/ Agreement, Name and/or No.	
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 900' FWL & 1,000' FSL of Sec. 30-T9S-R19E		8. Well Name and No. FEDERAL #13-30B	9. API Well No. 43-047-33581
		10. Field and Pool, or Exploratory Area NATURAL BUTTES 630	11. County or Parish, State UINTAH, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other: <u>DEEPEN WELL DEPTH</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandonment	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation have been completed, and the operator has determined that the site is ready for final inspection.)

CNG Producing Company request permission to amend the permit to drill by amending the well total depth from 9,750' to 10,000'.

RECEIVED

JUL 03 2000

DIVISION OF
OIL, GAS AND MINING

COPY SENT TO OPERATOR
Date: 7-5-00
Initials: CHD

14. I hereby certify that the forgoing is true and correct	
Name (Printed/Typed) SUSAN H. SACHITANA	Title REGULATORY REPORTS ADMINISTRATOR
Signature <i>Susan H. Sachitana</i>	Date 20000630

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

**Accepted by the
Utah Division of
Oil, Gas and Mining**

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*Federal Approval of this
Action is Necessary*

FOR RECORD ONLY

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE*
(Other instructions on
reverse side)

FORM APPROVED
OMB NO. 1004-0136
Expires: February 28, 1995

NOS 4/24/00

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK
 DRILL DEEPEN

b. TYPE OF WELL
 OIL WELL GAS WELL OTHER SINGLE ZONE MULTIPLE ZONE

2. NAME OF OPERATOR
CNG PRODUCING COMPANY

3. ADDRESS AND TELEPHONE NO.
CNG TOWER - 1450 POYDRAS STREET, NEW ORLEANS, LA 70112-6000

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements*.)
 At surface 900' FEL & 1,000' FSL of Sec. 30-T9S-R19E
 At proposed prod. zone

15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT.
(Also to nearest drlg. line, if any) 1,000'

16. NO. OF ACRES IN LEASE 600

17. NO. OF ACRES ASSIGNED TO THIS WELL 80 ACRES

18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT 2,400'

19. PROPOSED DEPTH 9,750'

20. ROTARY OR CABLE TOOLS ROTARY

21. ELEVATIONS (Show whether DF, RT, GR, etc.) 4,839'

22. APPROX. DATE WORK WILL START JUNE 15, 2000

5. LEASE DESIGNATION AND SERIAL NO.
U-37246

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME WELL NO.
FEDERAL #13-30B

9. API WELL NO.

10. FIELD AND POOL, OR WILDCAT
NATURAL BUTTES 630

11. SEC. T., R., M., OR BLK. AND SURVEY OR AREA
30-T9S-R19E

12. COUNTY OR PARISH UTAH

13. STATE UTAH

CONFIDENTIAL

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
17 1/2"	13 3/8"	54.5#	84'	
12 1/4"	8 5/8"	24#	3,000'	
7 7/8"	5 1/2"	17#	9,750'	

1. Drill a 17 1/2" hole to 84'. Run 13 3/8" 54.5 #/ft K-55 casing and cement to surface.
2. Drill a 12 1/4" hole with an air rig to 3,000', run 8 5/8", K-55 casing and cement to surface.
3. Nipple up and pressure test BOP stack prior to drilling out below surface pipe.
4. Operate pipe rams daily and blind rams as possible.
5. Drill a 7 7/8" hole to 9,750' with a KCL water mud system. Coring is possible. DST's will be run as needed to evaluate unexpected shows.
6. Run logs, set 5 1/2" 17# N-80 casing as dictated by drilling shows, tests, and logs. Casing program may be modified to provide added burst strength if needed for frac program.
7. Primary zones of interests are the Wasatch, Chapita Wells, Uteland Buttes and Mesa Verde.
8. All zones indicating potential for economically recoverable reserves will be tested in a normal, prudent manner.
9. In the event circulation is lost, air or air assisted mud will be utilized.

FORMATION TOPS	DEPTHS
Wasatch Tongue	4,674'
Green River Tongue	5,067'
Wasatch	5,229'
Chapita Wells	5,947'
Uteland Buttes	7,154'
Mesaverde	8,374'

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

SIGNED David Linger / shw TITLE Onshore Drilling Manager DATE May 8, 2000
 David L. Linger

RECEIVED

JUL 03 2000

DIVISION OF
OIL, GAS AND MINING

NOTICE OF APPROVAL **CONDITIONS OF APPROVAL ATTACHED**

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY Howard R. Linger TITLE Assistant Field Manager Mineral Resources DATE 6/22/00
 *See Instructions On Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

DOG M
0050444

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: CNG Producing Company

Well Name & Number: Federal 13-30B

API Number: 43-047-33581

Lease Number: U - 37246

Location: SWSW Sec. 30 T. 09S R. 19E

Agreement: N/A

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

RECEIVED

JUL 03 2000

DIVISION OF
OIL, GAS AND MINING

CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas Orders, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to Tim Ingwell of this office **prior to setting the next casing string or requesting plugging orders**. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected.

2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a **3M** system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

If an air compressor is on location and is being utilized to provide air for the drilling medium while drilling, the special drilling requirements in Onshore Oil and Gas Order No. 2, regarding air or gas drilling shall be adhered to. If a mist system is being utilized then the requirement for a deduster shall be waived.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint.

RECEIVED

JUL 03 2000

DIVISION OF
OIL, GAS AND MINING

In addition, to the cementing proposal for the surface casing, a minimum of 200 ft. of Class G neat cement shall be placed from 200 ft. to surface in the 8 5/8" X 13 3/8" -12 1/4" annulus.

As a minimum, the usable water and oil shale resources shall be isolated and/or protected by having a cement top for the production casing at least 200 ft. above the base of the usable water zone, identified at 2,274 ft. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the AO. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vapor proof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the AO.

A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. One copy of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

RECEIVED

JUL 03 2000

DIVISION OF
OIL, GAS AND MINING

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communication, not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5(d) shall be submitted to the appropriate Field Office within 60 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (1).

RECEIVED

JUL 03 2000

DIVISION OF
OIL, GAS AND MINING

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling onlease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries. Tests for meter accuracy will be conducted on initial meter installations and at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal Field Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

RECEIVED

JUL 03 2000

DIVISION OF
OIL, GAS AND MINING

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, please contact one of the following individuals:

Ed Forsman (435) 789-7077
Petroleum Engineer

Jerry Kenczka (435) 781-1190
Petroleum Engineer

BLM FAX Machine (435) 781-4410

RECEIVED

JUL 03 2000

DIVISION OF
OIL, GAS AND MINING

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids.

RECEIVED

JUL 03 2000

DIVISION OF
OIL, GAS AND MINING

**SURFACE USE PROGRAM
Conditions of Approval (COA)**

Plans For Reclamation Of Location:

All seeding for reclamation operations at this location shall use the following seed mixture:

gardner saltbush	Atriplex gardneri	4 lbs/acre
shadscale	Atriplex confertifolia	4 lbs/acre
galleta grass	Hilaria jamesii	2 lbs/acre
needle & thread grass	Stipa comata	2 lbs/acre

If the seed mixture is to be aurally broadcasted, the pounds per acre shall be doubled. All seed poundages are in Pure Live Seed.

Immediately after construction the stockpiled topsoil will be seeded and the seed worked into the soil by "walking" the pile with caterpillar tracks.

Other Information:

If this is a producing well and has facility motors that create loud noises the equipment will be muffled to reduce noise to wildlife.

RECEIVED

JUL 03 2000

DIVISION OF
OIL, GAS AND MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

CONFIDENTIAL

FORM APPROVED
OMB NO. 1004-0137
Expires: November 30, 2000

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. Lease Serial No.
U-37246

1a. Type of Well: Oil Well Gas Well Dry Other
b. Type of Completion New Well Work Over Deepen Plug Back Diff. Resvr.

6. If Indian, Allottee or Tribe Name
7. Unit or CA Agreement Name and No.

Other _____

CONFIDENTIAL

2. Name of Operator
DOMINION EXPLORATION & PRODUCTION, INC.

8. Lease Name and Well No.
FEDERAL 13-30B

3. Address 16945 NORTHCHASE DRIVE, SUITE 1750
HOUSTON, TEXAS 77060
3a. Phone No. (include area code)
(281) 873-3692

9. API Well No.
43-047-33581

4. Location of Well (Report location clearly and in accordance with Federal Regulations)

10. Field and Pool, or Exploratory
NATURAL BUTTES

At surface 1000' FSL & 900' FWL

11. Sec., T., R., M., on Block and Survey or Area Sec. 30, T9S, R19E

At top prod. interval reported below

12. County or Parish UINTAH
13. State UTAH

At total depth

14. Date Spudded 07/15/00
15. Date T.D. Reached 8/4/00
16. Date Completed 12-24-00
 D & A Ready to Prod.

17. Elevations (DF, RKB, RT, GL)*

18. Total Depth: MD 10,040' TVD
19. Plug Back T.D.: MD 9,964' TVD
20. Depth Bridge Plug Set: MD TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
DLLMSFL/DEN/NEU/GR - 6-8-01
22. Was well cored? No Yes (Submit analysis)
Was DST run? No Yes (Submit report)
Directional Survey? No Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
17-1/2"	13-3/8" J-55	54.5#	Surface	99'		Conductor		Calc.	
12-1/4"	8-5/8" J-55	24/32#	Surface	3,768'		866 sx Prem/G		Circ.	
7-7/8"	5-1/2" N-80	17#	Surface	10,040'		2200 sx G		Circ.	

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-3/8"	9,184'							

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Mesa Verde	9871'	9900'	9871' - 9900'	.45	34/58	Open
B) Mesa Verde	9264'	9282'	9264' - 9282'	.45	44	Open
C) Mesa Verde	8935'	9052'	8935' - 9052'	.45	36	Open
D) Mesa Verde	8430'	8437'	8430' - 8437'	.45	28	Open
E) Chapita Wells	6620'	6712'	6620' - 6712'	.45	46	Open

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and Type of Material
9871-9900	Fracture with 112,000# 20/40 Proppant + 100,000# 20/40 proppant
9264-9282	Fracture with 63,000# 20/40 Proppant
8935-9052	Fracture with 81,000# 20/40 Proppant
8430-8437	Fracture with 40,000# 20/40 Proppant
6620-6712	Fracture with 164,530# 12/20 & 14/40 Proppant

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
	12/24/00	24	→		383				Flowing

CONFIDENTIAL

CONFIDENTIAL

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

Formation (Log) Markers

Wasatch Tongue - Mesaverde

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
Chapita Wells	6590	6630	Sandstone; clear, frosted, fine grained	Wasatch Tongue	4672'
Mesaverde	8420	8438	Sandstone; "	Green River Tongue	5062'
Mesaverde	8930	8940	Sandstone; "	Wasatch	5218'
Mesaverde	9035	9070	Sandstone; "	Chapita Wells	6156'
Mesaverde	9250	9280	Sandstone; "	Mesaverde	8288'
Mesaverde	9870	9890	Sandstone; "		

32. Additional remarks (include plugging procedure):

Well currently shut in while waiting on installation of gathering line in order to tie into a sales line.

33. Circle enclosed attachments:

- 1. Electrical/Mechanical Logs (1 full set req'd.)
- 2. Geologic Report
- 3. DST Report
- 4. Directional Survey
- 5. Sundry Notice for plugging and cement verification
- 6. Core Analysis
- 7. Other

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Diann Flowers Title Regulatory Specialist

Signature *Diann Flowers* Date 06/04/2001

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Choke Size 18/64	Tbg. Press. Flwg. SI 185	Csg. Press 556	24 Hr. Rate →	Oil BBL	Gas MCF 383	Water BBL	Gas : Oil Ratio	Well Status	Shut in
---------------------	-----------------------------	-------------------	------------------	---------	----------------	-----------	-----------------	-------------	---------

CONFIDENTIAL

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	

(See instructions and spaces for additional data on reverse side)

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	

ENTITY ACTION FORM

Operator: Dominion Exploration & Production, Inc. Operator Account Number: N 1095
 Address: 16945 Northchase Drive, Suite 1750
city Houston
state TX zip 77060 Phone Number: (281) 873-3692

Well 1

API Number	Well Name	QQ	Sec	Twp	Rng	County
4304733581	Federal 13-30B	sw1/4	30	9S	19E	Uintah
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date	
A	99999	13177	7/15/2000		7/2/01 7/15/2000	
Comments: CONFIDENTIAL 7-2-01						

Well 2

API Number	Well Name	QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date	
Comments:						

Well 3

API Number	Well Name	QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date	
Comments:						

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Diann Flowers

Name (Please Print)

Diann Flowers
Signature

Regulatory Specialist

6/20/2000

Title

Date

RECEIVED

JUL 02 2001

DIVISION OF
OIL, GAS AND MINING

ENTITY ACTION FORM

Operator: Dominion Expl. & Prod., Inc. Operator Account Number: N 1095
 Address: 16945 Northchase Drive, Suite 1750
city Houston
state TX zip 7060 Phone Number: (281) 873-3692

Well 1

API Number	Well Name	QQ	Sec	Twp	Rng	County
4304733581	Federal 13-30B	nws	30	9S	19E	Uintah
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date	
A	99999	13249	7/15/2000		7/15/2000 8-9-01	
Comments: 8-9-01 CONFIDENTIAL						

Well 2

API Number	Well Name	QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date	
Comments:						

Well 3

API Number	Well Name	QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date	
Comments:						

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity.
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Diann Flowers

Name (Please Print)

Signature

Regulatory Specialist

Title

8/6/2001

Date

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

SUBMIT IN DUPLICATE
(See other instructions on reverse side)

FORM APPROVED
OMB NO. 1004-0137
Expires: February 28, 1995

5. LEASE DESIGNATION AND SERIAL NO.
UTU-37246

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME, WELL NO.
FEDERAL 13-30B

9. API WELL NO.
43-047-33581

10. FIELD AND POOL, OR WILDCAT
PARIETTE BENCH

11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA
Sec. 30, T9S, R19E

WELL COMPLETION OR RECOMPLETION REPORT AND LOG*

a. TYPE OF WELL: OIL WELL GAS WELL DRY Other _____

b. TYPE OF COMPLETION: NEW DRILL WORK OVER DEEP-EN PLUG BACK DIFF. RESVR. Other Recompletion

2. NAME OF OPERATOR
Dominion Expl. & Prod., Inc.

3. ADDRESS AND TELEPHONE NO.
16945 Northchase Drive, Suite 1750 Houston, Texas 77060

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)*
At surface 1000' FSL & 900' FWL
At top prod. interval reported below
At total depth

CONFIDENTIAL

14. PERMIT NO. **43-047-33581** DATE ISSUED _____

12. COUNTY OR PARISH **Uintah** 13. STATE **Utah**

15. DATE SPUDDED **7-15-00** 16. DATE T.D. REACHED **8-4-00** 17. DATE COMPL. (Ready to prod.) **10-5-01** 18. ELEVATIONS (DF, RKB, RT, GR, ETC.)* _____ 19. ELEV. CASINGHEAD _____

20. TOTAL DEPTH, MD & TVD **10,040'** 21. PLUG, BACK T.D., MD & TVD **9,978'** 22. IF MULTIPLE COMPL., HOW MANY* _____ 22. INTERVALS DRILLED BY _____ ROTARY TOOLS **x** CABLE TOOLS _____

24. PRODUCING INTERVAL(S), OF THIS COMPLETION - TOP, BOTTOM, NAME (MD AND TVD)*
**WASMVD
CHAPITA WELLS - MESAVERDE 6620-9888**

25. WAS DIRECTIONAL SURVEY MADE **No**

26. TYPE ELECTRIC AND OTHER LOGS RUN **DLL/MSFI/DEN/NEU/GR** 27. WAS WELL CORED **No**

28. CASING RECORD (Report all strings set in well)

CASING SIZE/GRADE	WEIGHT, L.B./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
13-3/8" J-55	54.5	93'	17-1/2"	SURFACE; CONDUCTOR	
8-5/8" J-55	32/24	3768'	12-1/4"	SURFACE; 866 SX LITE/G	
5-1/2" N-80	17	10040'	7-7/8"	SURFACE; 2200 SX LITE	

29. LINER RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)

30. TUBING RECORD

SIZE	DEPTH SET (MD)	PACKER SET (MD)
2-3/8"	9184'	

31. PERFORATION RECORD (Interval, size and number)

#1. 9871-9888; .45; 34 HOLES
#2. 9264-9282; .45; 44 HOLES
#3. 8935-9052; .45; 36 HOLES
#4. 8430-8437; .45; 28 HOLES
#5. 6620-6712; .45; 46 HOLES Frac w/164,530# Proppant

32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
9871-9888	100,000# 20/40 MESH
9264-9282	63,000# 20/40 MESH
8935-9052	81,000# 20/40 MESH
8430-8437	40,000 20/40 MESH

33.* PRODUCTION

DATE FIRST PRODUCTION **10-5-01** PRODUCTION METHOD (Flowing, gas lift, pumping - size and type of pump) **Flowing** WELL STATUS (Producing or shut-in) **Producing**

DATE OF TEST	HOURS TESTED	CHOKE SIZE	PROD'N. FOR TEST PERIOD	OIL-BBL.	GAS-MCF.	WATER -- BBL.	GAS-OIL RATIO
10-6-01	24	15/64	→	0	768	0	

FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE	OIL - BBL.	GAS - MCF	WATER - BBL.	OIL GRAVITY-API (CORR.)
785	1260	→				

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.) **Sold** TEST WITNESSED BY **Ken Secrest**

35. LIST OF ATTACHMENTS
LOGS FORWARDED UNDER SEPARATE COVER

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED *John H. Anderson* TITLE Regulatory Specialist DATE 12/15/2001

*(See Instructions and Spaces for Additional Data on Reverse Side)

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof, cored intervals; and all drill-stem, tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries):

38. GEOLOGIC MARKERS

FORMATION	TOP		BOTTOM	DESCRIPTION, CONTENTS, ETC.	NAME	TOP	
	MEAS. DEPTH	TRUE VERT. DEPTH				MEAS. DEPTH	TRUE VERT. DEPTH
CHAPITA WELLS	6590		6630	SANDSTONE; SUB-ANGULAR; CLR TO WHITE	WASATCH TONGUE	4672'	
MESAVERDE	8420		8438	"	GREEN RIVER TONGUE	5062'	
MESAVERDE	8930		8940	"	WASATCH	5218'	
MESAVERDE	9035		9070	"	CHAPITA WELLS	6156'	
MESAVERDE	9250		9280	"	MESAVERDE	8288'	
MESAVERDE	9870		9890	"			

CONFIDENTIAL

CONFIDENTIAL

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING

1. DJJ
2. CDW

X Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

7/1/2006

FROM: (Old Operator): N1095-Dominion E&P, Inc. 14000 Quail Springs Pkwy, Suite 600 Oklahoma City, OK 73134 Phone: 1 (405) 749-1300	TO: (New Operator): N2575-Gasco Production Company 8 Inverness Dr E, Suite 100 Englewood, CO 80112 Phone: 1 (303) 483-0044
-------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------

CA No.

Unit:

WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
FEDERAL 7-25A	25	090S	180E	4304730624	9030	Federal	OW	P
NGC 33-18J	18	090S	190E	4304731200	6155	Federal	OW	P
STATE 2-32B	32	090S	190E	4304732221	11371	State	GW	P
STATE 9-36A	36	090S	180E	4304732225	11364	State	GW	P
FEDERAL 13-30B	30	090S	190E	4304733581	13249	Federal	GW	P
STATE 13-36A	36	090S	180E	4304733598	11364	State	GW	P
RBU 3-15D	15	100S	180E	4304733600	13213	Federal	GW	P
FEDERAL 16-26A	26	090S	180E	4304733601	12928	Federal	GW	P
RBU 3-12D	12	100S	180E	4304733739	14492	Federal	GW	P

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 8/24/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 8/24/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 5/17/2004
- Is the new operator registered in the State of Utah: YES Business Number: 1454161-0143
- If **NO**, the operator was contacted on: _____
- (R649-9-2)Waste Management Plan has been received on: IN PLACE
- Inspections of LA PA state/fee well sites complete on: n/a
- Reports current for Production/Disposition & Sundries on: ok
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM BIA
- Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: n/a
- Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: n/a
- Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: n/a

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 8/30/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 8/30/2006
- Bond information entered in RBDMS on: 8/30/2006
- Fee/State wells attached to bond in RBDMS on: 8/30/2006
- Injection Projects to new operator in RBDMS on: n/a
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: UT1233
- Indian well(s) covered by Bond Number: n/a
- (R649-3-1) The **NEW** operator of any state/fee well(s) listed covered by Bond Number 4127763

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: See Attached List
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____	8. WELL NAME and NUMBER:	
2. NAME OF OPERATOR: Dominion Exploration & Production, Inc. N1095		9. API NUMBER:
3. ADDRESS OF OPERATOR: 14000 Quail Springs CITY Oklahoma City STATE OK ZIP 73134	PHONE NUMBER: (405) 749-1300	10. FIELD AND POOL, OR WILDCAT:
4. LOCATION OF WELL FOOTAGES AT SURFACE: _____ QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: _____		COUNTY: Uintah STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Effective July 1, 2006, Dominion Exploration & Production, Inc. has sold the wells on the attached list to:


Gasco Production Company **N 2575**
8 Inverness Drive East, Suite 100
Englewood, CO 80112



John D. Longwell - V.P. Operations
(303) 483-0044

UT1233 - State Wide BLM Bond
4127763 - Blanket Drilling Bond

RECEIVED
AUG 24 2006
DIV OF OIL, GAS & MINING

NAME (PLEASE PRINT) <u>Jason Garner</u>	TITLE <u>Asset Manager - Rocky Mountain Division</u>
SIGNATURE 	DATE <u>8/10/2006</u>

(This space for State use only)
APPROVED 8/30/06

Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

(See Instructions on Reverse Side)



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Vernal Field Office

170 South 500 East

Vernal, UT 84078

(435) 781-4400 Fax: (435) 781-4410

<http://www.blm.gov/utah/vernal>



IN REPLY REFER TO:

3162.3

UT08300

September 28, 2006

John D. Longwell
Gasco Production Company
8 Inverness Drive East, Suite 100
Englewood, Colorado 80112

Re: Well No. Federal 13-30B
SWSW, Sec. 30, T9S, R19E
Uintah County, Utah
Lease No. UTU-37246

Dear Mr. Longwell:

This correspondence is in regard to the self-certification statement submitted requesting a change in operator for the referenced well. After a review by this office, the change in operator request is approved. Effective immediately, Gasco Production Company is responsible for all operations performed on the referenced well. All liability will now fall under your bond, BLM Bond No. UT1233, for all operations conducted on the referenced well on the leased land.

Our records show that a right-of-way, UTU-77699 has been issued for the off lease portion of the road to the subject well. In order for Gasco Production Company to obtain the Bureau of Land Management's approval for the use of this right-of-way, you must have this right-of-way assigned over to Gasco Production Company. Please contact Cindy McKee at (435) 781-4434 for instructions on how to complete the assignment of the right-of-way.

If you have any other questions concerning this matter, please contact Cindy Severson of this office at (435) 781-4455.

Sincerely,

Matt Baker
Petroleum Engineer

cc: UDOGM
Dominion E & P, Inc.
Hill Gilman A

RECEIVED

OCT 23 2006

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

FORM APPROVED
OMB No. 1004-0135

Expires: November 30, 2000

AUG 24 2006

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU-37246

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
See Attached List

9. API Well No.

10. Field and Pool, or Exploratory Area
Natural Buttes

11. County or Parish, State
Uintah, UT

~~SUBMIT IN TRIPLICATE - Other Instructions on reverse side~~

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
Gasco Production Company

3a. Address
8 Inverness Drive East, Suite 100, Denver CO 80112

3b. Phone No. (include area code)
(303) 483-0044

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)


12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other Operator Change

13 Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

Effective July 1, 2006, Gasco Production Company has purchased the wells listed on the attachment from:

Dominion Exploration & Production, Inc.
14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134


Jason Garner - Asset Manager - Rocky Mountain Division

Please be advised that Gasco Production Company is considered to be the operator of the wells on the attached list, Lease #UTU-37246, Uintah County, and is responsible under the terms and conditions of the lease for the operations conducted upon the lease lands. Bond coverage is provided by State Wide BLM Bond #UT1233.

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

John D. Longwell

Signature



RECEIVED

OCT 23 2006

Title V.P. Operations

Date 8/10/2006

~~THIS SPACE FOR FEDERAL OR STATE OIL/GAS USE~~

Approved by



Petroleum Engineer

Date

SEP 28 2006

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

WELL NAME	API NUMBER	SEC., TWP., RGN.	FID/STATE LSE #
-----------	------------	------------------	-----------------

FEDERAL 13-30B

43-047-33581

Sec. 30-9S-19E

BLM UTU-37246

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

5. Lease Serial No. UTU-37246

6. If Indian, Allottee or Tribe Name NA

7. If Unit or CA/Agreement, Name and/or No. NA

8. Well Name and No. Federal 13-30B

9. API Well No. 43-047-33581

10. Field and Pool, or Exploratory Area Pariette Bench

11. County or Parish, State Uintah County, Utah

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
Gasco Production Company

3a. Address
8 Inverness Dr E, Englewood, Colorado 80112

3b. Phone No. (include area code)
303-483-0044

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
1000' FSL & 900' FWL
SW SW of Section 30-T9S-R19E


12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>Site security</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

Please find attached a copy of the site security diagram for this lease.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) <u>Beverly Walker</u>	Title <u>Engineering Technician</u>
Signature 	Date <u>March 8, 2007</u>



THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	



Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED
MAR 12 2007
DIV. OF OIL, GAS & MINING

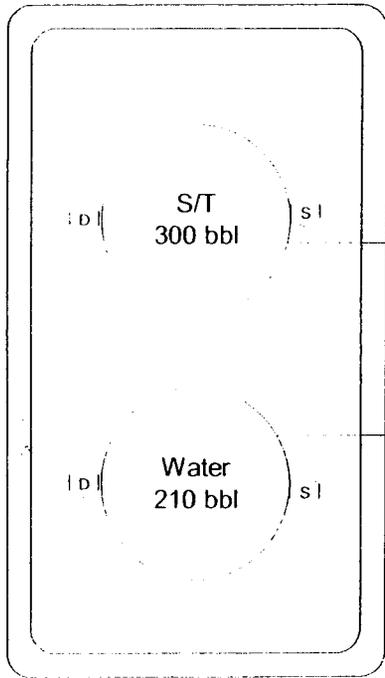

60'x30'x2'

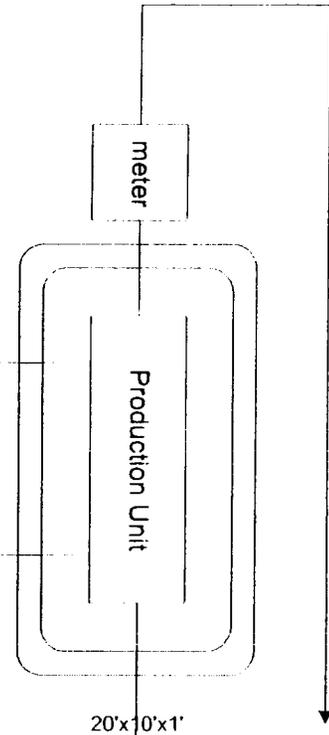

20'x10'x1'

55g Methanol
55g Methanol

Well Head

This lease is subject to the Site Security Plan for GASCO Production Company. The Plan is located at GASCO Production Company 8 Inverness Drive East Suite 100 Englewood, CO 80112-5625

LEGEND

- S - Sales Valve
- D - Drain Valve
- I - Inlet Valve
- O - Overflow
- B - Blowdown
- V - Vent

POSITION OF VALVES AND USE OF SEALS DURING PRODUCTION/BLOWDOWN

Valves	Line Purpose	Position	Seal Installed
D	Drain	Closed	Yes
S	Sales	Closed	Yes
I	Inlet	Open	No
O	Overflow	Open/Closed	No
B	Blowdown	Open/Closed	No

POSITION OF VALVES AND USE OF SEALS DURING SALES

Valves	Line Purpose	Position	Seal Installed
D	Drain	Closed	Yes
S	Sales	Open	No
I	Inlet	Closed	Yes
O	Overflow	Closed	Yes
B	Blowdown	Closed	Yes

POSITION OF VALVES AND USE OF SEALS DURING WATER DRAIN

Valves	Line Purpose	Position	Seal Installed
D	Drain	Open	No
S	Sales	Closed	Yes
I	Inlet	Closed	No
O	Overflow	Closed	No
B	Blowdown	Closed	No

BUYS & ASSOCIATES, INC.
ENVIRONMENTAL CONSULTANTS

GASCO Production Company
Federal 13-30B
SW/SW Sec. 30, Twp. 9S, Rge. 19E
Uintah County, Utah

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: U-37246
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: FEDERAL 13-30B
2. NAME OF OPERATOR: GASCO PRODUCTION COMPANY	9. API NUMBER: 43047335810000
3. ADDRESS OF OPERATOR: 8 Inverness Dr. East, Suite 100 , Englewood, CO, 80112	PHONE NUMBER: 303 483-0044 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1000 FSL 0900 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSW Section: 30 Township: 09.0S Range: 19.0E Meridian: S	9. FIELD and POOL or WILDCAT: PARIETTE BENCH COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 1/7/2011	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input checked="" type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Gasco would like to dispose of water at Integrated Water management, LLC state approved commercial disposal facility located in Section 30, 2 south Range 4 west in North Blue Bench UT. This facility would be used in addition to the currently approved disposal facilities that Gasco uses to dispose of water from this well.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

NAME (PLEASE PRINT) Roger Knight	PHONE NUMBER 303 996-1803	TITLE EHS Supervisor
SIGNATURE N/A		DATE 12/30/2010

Effective Date: 4/16/2015

FORMER OPERATOR:	NEW OPERATOR:
Gasco Production Company N2575 7979 E. Tufts Avenue, Suite 11500 Denver, CO 80237 303-996-1805	Badlands Production Company N4265 7979 E. Tufts Avenue, Suite 11500 Denver, CO 80237 303-996-1805
CA Number(s):	Unit(s): Gate Canyon, Wilkin Ridge Deep, RBU-EOR-GRRV

WELL INFORMATION:

Well Name	Sec	TWN	RNG	API	Entity	Mineral	Surface	Type	Status
See Attached List									

OPERATOR CHANGES DOCUMENTATION:

1. Sundry or legal documentation was received from the **FORMER** operator on: 6/2/2015
2. Sundry or legal documentation was received from the **NEW** operator on: 6/2/2015
3. New operator Division of Corporations Business Number: 1454161-0143

REVIEW:

1. Surface Agreement Sundry from **NEW** operator on Fee Surface wells received on: 6/2/2015
2. Receipt of Acceptance of Drilling Procedures for APD on: N/A
3. Reports current for Production/Disposition & Sundries: 6/3/2015
4. OPS/SI/TA well(s) reviewed for full cost bonding: 1/20/2016
5. UIC5 on all disposal/injection/storage well(s) approved on: N/A
6. Surface Facility(s) included in operator change: None
7. Inspections of PA state/fee well sites complete on (only upon operators request): N/A

NEW OPERATOR BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: SUR0027842
2. Indian well(s) covered by Bond Number: N/A
3. State/fee well(s) covered by Bond Number(s): SUR0027845
SUR0035619 -FCB

DATA ENTRY:

1. Well(s) update in the **OGIS** on: 1/22/2016
2. Entity Number(s) updated in **OGIS** on: 1/22/2016
3. Unit(s) operator number update in **OGIS** on: 1/22/2016
4. Surface Facilities update in **OGIS** on: N/A
5. State/Fee well(s) attached to bond(s) in **RBDMS** on: 1/22/2016
6. Surface Facilities update in **RBDMS** on: N/A

LEASE INTEREST OWNER NOTIFICATION:

1. The **NEW** operator of the Fee (Mineral) wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 1/22/2016

COMMENTS:

From: Gasco Production Company
 To: Badlands Production Company
 Effective Date: 4/16/2015

Well Name	Section	TWN	RNG	API Number	Entity	Mineral	Surface	Type	Status
FEDERAL 23-18G-9-19	18	090S	190E	4304752496		Federal	Federal	OW	APD
FEDERAL 14-17G-9-19	17	090S	190E	4304752522		Federal	Federal	OW	APD
FEDERAL 13-18G-9-19	18	090S	190E	4304752538		Federal	Federal	OW	APD
FEDERAL 23-29G-9-19	29	090S	190E	4304752544		Federal	Federal	OW	APD
FEDERAL 24-20G-9-19	20	090S	190E	4304752545		Federal	Federal	OW	APD
FEDERAL 31-21G-9-19	21	090S	190E	4304752546		Federal	Federal	OW	APD
Federal 323-29-9-19	29	090S	190E	4304753026		Federal	Federal	GW	APD
Federal 421-29-9-19	29	090S	190E	4304753027		Federal	Federal	GW	APD
Federal 322-29-9-19	29	090S	190E	4304753029		Federal	Federal	GW	APD
Federal 431-29-9-19	29	090S	190E	4304753030		Federal	Federal	GW	APD
Federal 432-29-9-19	29	090S	190E	4304753031		Federal	Federal	GW	APD
Federal 414-29-9-19	29	090S	190E	4304753070		Federal	Federal	GW	APD
FEDERAL 412-29-9-19	29	090S	190E	4304753073		Federal	Federal	GW	APD
FEDERAL 213-29-9-19	29	090S	190E	4304753076		Federal	Federal	GW	APD
federal 321-29-9-19	29	090S	190E	4304753078		Federal	Federal	GW	APD
FEDERAL 213-29-9-19	29	090S	190E	4304753079		Federal	Federal	GW	APD
FEDERAL 321-29-9-19	29	090S	190E	4304753080		Federal	Federal	GW	APD
Federal 212-29-9-19	29	090S	190E	4304753133		Federal	Federal	GW	APD
State 321-32-9-19	32	090S	190E	4304754479		State	State	GW	APD
State 423-32-9-19	32	090S	190E	4304754480		State	State	GW	APD
State 421-32-9-19	32	090S	190E	4304754481		State	State	GW	APD
State 413-32-9-19	32	090S	190E	4304754482		State	State	GW	APD
State 323-32-9-19	32	090S	190E	4304754483		State	State	GW	APD
State 431-32-9-19	32	090S	190E	4304754529		State	State	GW	APD
Desert Spring State 224-36-9-18	36	090S	180E	4304754541		State	State	GW	APD
Desert Spring State 243-36-9-18	36	090S	180E	4304754542		State	State	GW	APD
Desert Spring State 241-36-9-18	36	090S	180E	4304754543		State	State	GW	APD
FEDERAL 332-30-9-19	30	090S	190E	4304753012	19650	Federal	Federal	GW	DRL
WILKIN RIDGE FED 43-29-10-17	29	100S	170E	4301333098	15941	Federal	Federal	GW	OPS
LAMB TRUST 11-23-9-19	23	090S	190E	4304736915	16556	Fee	Fee	GW	OPS
SHEEP WASH FED 43-26-9-18	26	090S	180E	4304738573	17201	Federal	Federal	GW	OPS
FEDERAL 13-19-9-19	19	090S	190E	4304739777	18344	Federal	Federal	GW	OPS
FEDERAL 12-17-9-19	17	090S	190E	4304739800	17202	Federal	Federal	GW	OPS
GATE CYN 31-21-11-15	21	110S	150E	4301332391	13787	State	State	GW	P
WILKIN RIDGE ST 12-32-10-17	32	100S	170E	4301332447	14033	State	State	GW	P
GATE CYN 41-20-11-15	20	110S	150E	4301332475	14417	State	State	GW	P
WILKIN RIDGE FED 34-17-10-17	17	100S	170E	4301332560	14726	Federal	Federal	GW	P
GATE CYN 41-19-11-16	19	110S	160E	4301332611	14439	Federal	Federal	GW	P
WILKIN RIDGE ST 44-32-10-17	32	100S	170E	4301332619	15649	State	State	GW	P
WILKIN RIDGE FED 12-4-11-17	4	110S	170E	4301332674	15537	Federal	Federal	GW	P
WILKIN RIDGE ST 24-32-10-17	32	100S	170E	4301332676	15242	State	State	GW	P
WILKIN RIDGE FED 23-29-10-17	29	100S	170E	4301332679	14033	Federal	Federal	GW	P
GATE CYN ST 23-16-11-15	16	110S	150E	4301332685	16082	State	State	GW	P
WILKIN RIDGE ST 34-16-10-17	16	100S	170E	4301332730	15243	State	State	GW	P
WILKIN RIDGE FED 31-29-10-17	29	100S	170E	4301332773	15370	Federal	Federal	GW	P
WILKIN RIDGE 32-08	8	110S	170E	4301332778	14802	Federal	Federal	GW	P
GATE CYN ST 23-16-11-16	16	110S	160E	4301332888	15098	State	State	GW	P
WILKIN RIDGE FED 24-20-10-17	20	100S	170E	4301333081	15714	Federal	Federal	GW	P
WILKIN RIDGE FED 32-20-10-17	20	100S	170E	4301333087	15807	Federal	Federal	GW	P
WILKIN RIDGE FED 14-4-11-17	4	110S	170E	4301333099	15920	Federal	Federal	GW	P
RYE PATCH FED 22-21	22	110S	140E	4301333437	16919	Federal	Federal	GW	P
RYE PATCH FED 24-21	24	110S	140E	4301333443	16367	Federal	Federal	GW	P
SQUAW CROSSING U 5	2	100S	180E	4304730129	16266	State	State	OW	P
RBU 5-11D	11	100S	180E	4304730409	9005	Federal	Federal	OW	P
FEDERAL 7-25A	25	090S	180E	4304730624	9030	Federal	Federal	OW	P

From: Gasco Production Company
 To: Badlands Production Company
 Effective Date: 4/16/2015

RBU 6-2D	2	100S	180E	4304731190	7075	State	State	OW	P
NGC 33-18J	18	090S	190E	4304731200	6155	Federal	Federal	OW	P
RBU 13-2D	2	100S	180E	4304731280	16267	State	State	OW	P
RBU 16-3D	3	100S	180E	4304731352	16268	Federal	Federal	OW	P
RBU 10-11D	11	100S	180E	4304731357	7053	Federal	Federal	OW	P
RBU 8-10D	10	100S	180E	4304731364	4955	Federal	Federal	OW	P
RBU 15-3D	3	100S	180E	4304731539	9965	Federal	Federal	OW	P
RBU 12-12D	12	100S	180E	4304731651	10688	Federal	Federal	OW	P
RBU 2-10D	10	100S	180E	4304731801	10784	Federal	Federal	OW	P
RBU 3-15D	15	100S	180E	4304733600	13213	Federal	Federal	OW	P
RBU 3-12D	12	100S	180E	4304733739	14492	Federal	Federal	OW	P
STATE 7-36A	36	090S	180E	4304733741	14244	State	State	GW	P
FEDERAL 34-29	29	090S	190E	4304733750	13174	Federal	Federal	GW	P
FEDERAL 24-7 #1	7	100S	180E	4304733983	13182	Federal	Federal	GW	P
FEDERAL 23-29 #1	29	090S	190E	4304734111	13441	Federal	Federal	GW	P
FED 24-20-9-19	20	090S	190E	4304734168	14150	Federal	Federal	GW	P
FED 44-20-9-19	20	090S	190E	4304734169	14140	Federal	Federal	GW	P
FED 23-21-9-19	21	090S	190E	4304734199	13601	Federal	Federal	GW	P
FED 32-31-9-19	31	090S	190E	4304734201	13641	Federal	Federal	GW	P
FED 42-29-9-19	29	090S	190E	4304734202	13455	Federal	Federal	GW	P
PETES WASH 23-12 #1	12	100S	170E	4304734286	13492	Federal	Federal	GW	P
STATE 4-32B	32	090S	190E	4304734314	14440	State	State	GW	P
FED 14-18-2 #1	18	100S	180E	4304734539	13491	Federal	Federal	GW	P
FED 43-24-3 #1	24	100S	170E	4304734551	13726	Federal	Federal	GW	P
LYTHAM FED 22-22-9-19	22	090S	190E	4304734607	13640	Federal	Federal	GW	P
FED 11-21-9-19	21	090S	190E	4304734608	14151	Federal	Federal	GW	P
FED 22-30-10-18	30	100S	180E	4304734924	14280	Federal	Federal	GW	P
FEDERAL 43-30-9-19	30	090S	190E	4304735343	14202	Federal	Federal	GW	P
FED 11-22-9-19	22	090S	190E	4304735404	14203	Federal	Federal	GW	P
FED 42-21-9-19	21	090S	190E	4304735405	14928	Federal	Federal	GW	P
STATE 24-16-9-19	16	090S	190E	4304735588	14418	State	Federal	GW	P
FEDERAL 31-21-9-19	21	090S	190E	4304735606	14441	Federal	Federal	GW	P
FEDERAL 12-29-9-19	29	090S	190E	4304735614	14442	Federal	Federal	GW	P
FEDERAL 24-31-9-19	31	090S	190E	4304735623	14640	Federal	Federal	GW	P
FEDERAL 41-31-9-19	31	090S	190E	4304735624	14419	Federal	Federal	GW	P
LAMB TRUST 24-22-9-19	22	090S	190E	4304735732	14496	Fee	Fee	GW	P
LAMB TRUST 24-14-9-19	14	090S	190E	4304735733	14519	Fee	Fee	GW	P
FEDERAL 11-22-10-18	22	100S	180E	4304735808	15592	Federal	Federal	GW	P
FEDERAL 21-6-10-19	6	100S	190E	4304735844	14356	Federal	Federal	GW	P
DESERT SPRING ST 41-36-9-18	36	090S	180E	4304735845	14639	State	State	GW	P
STATE 12-32-9-19	32	090S	190E	4304735995	14871	State	State	GW	P
FEDERAL 12-20-9-19	20	090S	190E	4304736093	14976	Federal	Federal	GW	P
FEDERAL 32-20-9-19	20	090S	190E	4304736094	16120	Federal	Federal	GW	P
FEDERAL 23-30-9-19	30	090S	190E	4304736095	14872	Federal	Federal	GW	P
SHEEP WASH FED 34-26-9-18	26	090S	180E	4304736113	15096	Federal	Federal	GW	P
DESERT SPRING ST 23-36-9-18	36	090S	180E	4304736219	14738	State	State	GW	P
DESERT SPRING ST 21-36-9-18	36	090S	180E	4304736220	14763	State	State	GW	P
DESERT SPRING ST 12-36-9-18	36	090S	180E	4304736233	14764	State	State	GW	P
DESERT SPRING ST 43-36-9-18	36	090S	180E	4304736241	14992	State	State	GW	P
DESERT SPRING ST 34-36-9-18	36	090S	180E	4304736242	14716	State	State	GW	P
FEDERAL 14-31-9-19	31	090S	190E	4304736271	15884	Federal	Federal	GW	P
FEDERAL 12-31-9-19	31	090S	190E	4304736336	15086	Federal	Federal	GW	P
FEDERAL 21-31-9-19	31	090S	190E	4304736368	15605	Federal	Federal	GW	P
FEDERAL 23-31-9-19	31	090S	190E	4304736442	15715	Federal	Federal	GW	P
SHEEP WASH FED 43-25-9-18	25	090S	180E	4304736600	14977	Federal	Federal	GW	P
FEDERAL 43-19-9-19	19	090S	190E	4304736719	15186	Federal	Federal	GW	P

From: Gasco Production Company
 To: Badlands Production Company
 Effective Date: 4/16/2015

SHEEP WASH FED 21-25-9-18	25	090S	180E	4304736727	15475	Federal	Federal	GW	P
FEDERAL 21-30-9-19	30	090S	190E	4304736739	15476	Federal	Federal	GW	P
SHEEP WASH FED 23-25-9-18	25	090S	180E	4304736740	15213	Federal	Federal	GW	P
FEDERAL 23-19-9-19	19	090S	190E	4304736771	15355	Federal	Federal	GW	P
SHEEP WASH FED 41-25-9-18	25	090S	180E	4304736772	15338	Federal	Federal	GW	P
FEDERAL 41-30-9-19	30	090S	190E	4304736817	15212	Federal	Federal	GW	P
LAMB TRUST 34-22-9-19	22	090S	190E	4304736913	15187	Fee	Fee	GW	P
LAMB TRUST 14-14-9-19	14	090S	190E	4304736916	17012	Fee	Fee	GW	P
DESERT SPRING ST 33-36-9-18	36	090S	180E	4304737115	15011	State	State	GW	P
FEDERAL 14-17-9-19	17	090S	190E	4304737116	16163	Federal	Federal	GW	P
FEDERAL 34-18-9-19	18	090S	190E	4304737117	16275	Federal	Federal	GW	P
UTELAND ST 41-2-10-18	2	100S	180E	4304737132	15087	State	State	GW	P
UTELAND ST 43-2-10-18	2	100S	180E	4304737338	15365	State	State	GW	P
FEDERAL 41-19-9-19	19	090S	190E	4304737611	16311	Federal	Federal	GW	P
FEDERAL 32-30-9-19	30	090S	190E	4304737612	16051	Federal	Federal	GW	P
FEDERAL 12-30-9-19	30	090S	190E	4304737613	16052	Federal	Federal	GW	P
FEDERAL 21-19-9-19	19	090S	190E	4304737621	16253	Federal	Federal	GW	P
FEDERAL 14-18-9-19	18	090S	190E	4304737622	16264	Federal	Federal	GW	P
FEDERAL 34-30-9-19	30	090S	190E	4304737630	16557	Federal	Federal	GW	P
DESERT SPRING FED 21-1-10-18	1	100S	180E	4304737631	15961	Federal	Federal	GW	P
FEDERAL 12-1-10-18	1	100S	180E	4304737646	16023	Federal	Federal	GW	P
SHEEP WASH FED 14-25-9-18	25	090S	180E	4304737647	16121	Federal	Federal	GW	P
UTELAND ST 21-2-10-18	2	100S	180E	4304737676	16254	State	State	GW	P
UTELAND ST 12-2-10-18	2	100S	180E	4304737677	15806	State	State	GW	P
UTELAND ST 34-2-10-18	2	100S	180E	4304738028	16868	State	State	GW	P
FEDERAL 14-19-9-19	19	090S	190E	4304738336	16467	Federal	Federal	GW	P
FEDERAL 34-19-9-19	19	090S	190E	4304738337	16119	Federal	Federal	GW	P
SHEEP WASH FED 41-26-9-18	26	090S	180E	4304738351	16884	Federal	Federal	GW	P
SHEEP WASH FED 32-25-9-18	25	090S	180E	4304738352	16349	Federal	Federal	GW	P
SHEEP WASH FED 34-25-9-18	25	090S	180E	4304738353	16210	Federal	Federal	GW	P
FEDERAL 12-19-9-19	19	090S	190E	4304738407	16236	Federal	Federal	GW	P
SHEEP WASH FED 23-26-9-18	26	090S	180E	4304738465	16558	Federal	Federal	GW	P
SHEEP WASH FED 12-25-9-18	25	090S	180E	4304738469	16449	Federal	Federal	GW	P
FEDERAL 23-18-9-19	18	090S	190E	4304738575	16312	Federal	Federal	GW	P
LAMB TRUST 34-22A-9-19	22	090S	190E	4304738673	15832	Fee	Fee	GW	P
UTELAND FED 42-11-10-18	11	100S	180E	4304738896	16792	Federal	Federal	GW	P
STATE 21-32B	32	090S	190E	4304739170	16309	State	State	GW	P
STATE 22-32A	32	090S	190E	4304739171	16308	State	State	GW	P
STATE 21-32A	32	090S	190E	4304739172	16310	State	State	GW	P
FEDERAL 11-19-9-19	19	090S	190E	4304739717	17054	Federal	Federal	GW	P
SHEEP WASH FED 31-25-9-18	25	090S	180E	4304739729	17241	Federal	Federal	GW	P
SHEEP WASH FED 11-25-9-18	25	090S	180E	4304739730	17266	Federal	Federal	GW	P
DESERT SPG FED 41-1-10-18	1	100S	180E	4304739773	17013	Federal	Federal	GW	P
FED 32-19X-9-19(RIGSKID)	19	090S	190E	4304740233	17014	Federal	Federal	GW	P
FEDERAL 23-30G-9-19	30	090S	190E	4304751280	18211	Federal	Federal	OW	P
FEDERAL 34-19G-9-19	19	090S	190E	4304751281	18210	Federal	Federal	OW	P
FEDERAL 442-30-9-19	30	090S	190E	4304752870	19647	Federal	Federal	GW	P
FEDERAL 333-30-9-19	30	090S	190E	4304752872	19648	Federal	Federal	GW	P
FEDERAL 423-30-9-19	30	090S	190E	4304753011	19649	Federal	Federal	GW	P
Desert Springs State 412-36-9-18	36	090S	180E	4304753324	19783	State	State	GW	P
Desert Springs State 424-36-9-18	36	090S	180E	4304753325	19783	State	State	GW	P
Desert Springs State 133-36-9-18	36	090S	180E	4304753326	19747	State	State	GW	P
Desert Spring State 142-36-9-18	36	090S	180E	4304753327	19747	State	State	GW	P
DESERT SPRINGS ST 422-36-9-18	36	090S	180E	4304753328	19783	State	State	GW	P
WILKIN RIDGE ST 31-32-10-17	32	100S	170E	4301332677	15144	State	State	GW	S
RBU 4-11D	11	100S	180E	4304730718	16269	Federal	Federal	OW	S

From: Gasco Production Company
To: Badlands Production Company
Effective Date: 4/16/2015

RBU 2-11D	11	100S	180E	4304730826	16270	Federal	Federal	OW	S
RBU 6-11D	11	100S	180E	4304731192	16271	Federal	Federal	OW	S
STATE 2-32B	32	090S	190E	4304732221	11371	State	State	GW	S
STATE 9-36A	36	090S	180E	4304732225	11364	State	State	GW	S
FEDERAL 13-30B	30	090S	190E	4304733581	13249	Federal	Federal	GW	S
STATE 13-36A	36	090S	180E	4304733598	17838	State	State	GW	S
FEDERAL 16-26A	26	090S	180E	4304733601	12928	Federal	Federal	GW	S
FEDERAL 31-29	29	090S	190E	4304733653	13077	Federal	Federal	GW	S
RBU 1-10D	10	100S	180E	4304734312	16265	Federal	Federal	OW	S
FEDERAL 13-18-9-19	18	090S	190E	4304739776	17149	Federal	Federal	GW	S

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

5. LEASE DESIGNATION AND SERIAL NUMBER:

UTU-76482

SUNDRY NOTICES AND REPORTS ON WELLS

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

7. UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL
OIL WELL GAS WELL OTHER _____

8. WELL NAME and NUMBER:
Desert Spring Fed 21-1-10-18

2. NAME OF OPERATOR:
Gasco Production Company

9. API NUMBER:
4304737631

3. ADDRESS OF OPERATOR:
7979 E. Tufts Ave. CITY Denver STATE CO ZIP 80237

PHONE NUMBER:
(303) 483-0044

10. FIELD AND POOL, OR WILDCAT:
Uteland Butte

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 0633 FNL 1512 FWL

COUNTY: Uintah

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NENW 1 10S 18E S

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: 4/16/2015	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Gasco Production Company requests a change of operator on this well, in addition to the wells on the attached list from Gasco Production Company to Badlands Production Company, effective date of 4/16/2015.

Gasco Production Company
7979 E Tufts Ave, Suite 1150
Denver CO 80237
303-996-1805

Michael Decker

Michael Decker, Exec. Vice President & COO

Badlands Production Company
7979 E Tufts Ave, Suite 1150
Denver CO 80237
303-996-1805

Michael Decker

Michael Decker, Exec. Vice President & COO

RECEIVED

JUN 02 2015

DIV. OF OIL, GAS & MINING

NAME (PLEASE PRINT) Lindsey Cooke

TITLE Engineering Tech

SIGNATURE

Lindsey Cooke

DATE 5/18/2015

(This space for State use only)

APPROVED

JAN 22 2016

DIV. OIL GAS & MINING
BY: *Rachel Medina*

Well Name	Section	TWN	RNG	API	Entity	Mineral	Surface	Type	Status
FEDERAL 332-30-9-19	30	090S	190E	4304753012	19650	Federal	Federal	GW	DRL
WILKIN RIDGE FED 43-29-10-17	29	100S	170E	4301333098	15941	Federal	Federal	GW	OPS
LAMB TRUST 11-23-9-19	23	090S	190E	4304736915	16556	Fee	Fee	GW	OPS
SHEEP WASH FED 43-26-9-18	26	090S	180E	4304738573	17201	Federal	Federal	GW	OPS
FEDERAL 13-19-9-19	19	090S	190E	4304739777	18344	Federal	Federal	GW	OPS
FEDERAL 12-17-9-19	17	090S	190E	4304739800	17202	Federal	Federal	GW	OPS
GATE CYN 31-21-11-15	21	110S	150E	4301332391	13787	State	State	GW	P
WILKIN RIDGE ST 12-32-10-17	32	100S	170E	4301332447	14033	State	State	GW	P
GATE CYN 41-20-11-15	20	110S	150E	4301332475	14417	State	State	GW	P
WILKIN RIDGE FED 34-17-10-17	17	100S	170E	4301332560	14726	Federal	Federal	GW	P
GATE CYN 41-19-11-16	19	110S	160E	4301332611	14439	Federal	Federal	GW	P
WILKIN RIDGE ST 44-32-10-17	32	100S	170E	4301332619	15649	State	State	GW	P
WILKIN RIDGE FED 12-4-11-17	4	110S	170E	4301332674	15537	Federal	Federal	GW	P
WILKIN RIDGE ST 24-32-10-17	32	100S	170E	4301332676	15242	State	State	GW	P
WILKIN RIDGE FED 23-29-10-17	29	100S	170E	4301332679	14033	Federal	Federal	GW	P
GATE CYN ST 23-16-11-15	16	110S	150E	4301332685	16082	State	State	GW	P
WILKIN RIDGE ST 34-16-10-17	16	100S	170E	4301332730	15243	State	State	GW	P
WILKIN RIDGE FED 31-29-10-17	29	100S	170E	4301332773	15370	Federal	Federal	GW	P
WILKIN RIDGE 32-08	8	110S	170E	4301332778	14802	Federal	Federal	GW	P
GATE CYN ST 23-16-11-16	16	110S	160E	4301332888	15098	State	State	GW	P
WILKIN RIDGE FED 24-20-10-17	20	100S	170E	4301333081	15714	Federal	Federal	GW	P
WILKIN RIDGE FED 32-20-10-17	20	100S	170E	4301333087	15807	Federal	Federal	GW	P
WILKIN RIDGE FED 14-4-11-17	4	110S	170E	4301333099	15920	Federal	Federal	GW	P
RYE PATCH FED 22-21	22	110S	140E	4301333437	16919	Federal	Federal	GW	P
RYE PATCH FED 24-21	24	110S	140E	4301333443	16367	Federal	Federal	GW	P
RBU 5-11D	11	100S	180E	4304730409	9005	Federal	Federal	OW	P
FEDERAL 7-25A	25	090S	180E	4304730624	9030	Federal	Federal	OW	P
RBU 6-2D	2	100S	180E	4304731190	7075	State	State	OW	P
NGC 33-18J	18	090S	190E	4304731200	6155	Federal	Federal	OW	P
RBU 13-2D	2	100S	180E	4304731280	16267	State	State	OW	P
RBU 16-3D	3	100S	180E	4304731352	16268	Federal	Federal	OW	P
RBU 10-11D	11	100S	180E	4304731357	7053	Federal	Federal	OW	P
RBU 8-10D	10	100S	180E	4304731364	4955	Federal	Federal	OW	P
RBU 15-3D	3	100S	180E	4304731539	9965	Federal	Federal	OW	P
RBU 12-12D	12	100S	180E	4304731651	10688	Federal	Federal	OW	P
RBU 2-10D	10	100S	180E	4304731801	10784	Federal	Federal	OW	P
RBU 3-15D	15	100S	180E	4304733600	13213	Federal	Federal	OW	P
RBU 3-12D	12	100S	180E	4304733739	14492	Federal	Federal	OW	P
STATE 7-36A	36	090S	180E	4304733741	14244	State	State	GW	P
FEDERAL 34-29	29	090S	190E	4304733750	13174	Federal	Federal	GW	P
FEDERAL 24-7 #1	7	100S	180E	4304733983	13182	Federal	Federal	GW	P
FEDERAL 23-29 #1	29	090S	190E	4304734111	13441	Federal	Federal	GW	P
FED 24-20-9-19	20	090S	190E	4304734168	14150	Federal	Federal	GW	P
FED 44-20-9-19	20	090S	190E	4304734169	14140	Federal	Federal	GW	P
FED 23-21-9-19	21	090S	190E	4304734199	13601	Federal	Federal	GW	P
FED 32-31-9-19	31	090S	190E	4304734201	13641	Federal	Federal	GW	P
FED 42-29-9-19	29	090S	190E	4304734202	13455	Federal	Federal	GW	P
PETES WASH 23-12 #1	12	100S	170E	4304734286	13492	Federal	Federal	GW	P
STATE 4-32B	32	090S	190E	4304734314	14440	State	State	GW	P
FED 14-18-2 #1	18	100S	180E	4304734539	13491	Federal	Federal	GW	P
FED 43-24-3 #1	24	100S	170E	4304734551	13726	Federal	Federal	GW	P
LYTHAM FED 22-22-9-19	22	090S	190E	4304734607	13640	Federal	Federal	GW	P
FED 11-21-9-19	21	090S	190E	4304734608	14151	Federal	Federal	GW	P
FED 22-30-10-18	30	100S	180E	4304734924	14280	Federal	Federal	GW	P
FEDERAL 43-30-9-19	30	090S	190E	4304735343	14202	Federal	Federal	GW	P
FED 11-22-9-19	22	090S	190E	4304735404	14203	Federal	Federal	GW	P
FED 42-21-9-19	21	090S	190E	4304735405	14928	Federal	Federal	GW	P
STATE 24-16-9-19	16	090S	190E	4304735588	14418	State	Federal	GW	P

FEDERAL 31-21-9-19	21	090S	190E	4304735606	14441	Federal	Federal	GW	P
FEDERAL 12-29-9-19	29	090S	190E	4304735614	14442	Federal	Federal	GW	P
FEDERAL 24-31-9-19	31	090S	190E	4304735623	14640	Federal	Federal	GW	P
FEDERAL 41-31-9-19	31	090S	190E	4304735624	14419	Federal	Federal	GW	P
LAMB TRUST 24-22-9-19	22	090S	190E	4304735732	14496	Fee	Fee	GW	P
LAMB TRUST 24-14-9-19	14	090S	190E	4304735733	14519	Fee	Fee	GW	P
FEDERAL 11-22-10-18	22	100S	180E	4304735808	15592	Federal	Federal	GW	P
FEDERAL 21-6-10-19	6	100S	190E	4304735844	14356	Federal	Federal	GW	P
DESERT SPRING ST 41-36-9-18	36	090S	180E	4304735845	14639	State	State	GW	P
STATE 12-32-9-19	32	090S	190E	4304735995	14871	State	State	GW	P
FEDERAL 12-20-9-19	20	090S	190E	4304736093	14976	Federal	Federal	GW	P
FEDERAL 32-20-9-19	20	090S	190E	4304736094	16120	Federal	Federal	GW	P
FEDERAL 23-30-9-19	30	090S	190E	4304736095	14872	Federal	Federal	GW	P
SHEEP WASH FED 34-26-9-18	26	090S	180E	4304736113	15096	Federal	Federal	GW	P
DESERT SPRING ST 23-36-9-18	36	090S	180E	4304736219	14738	State	State	GW	P
DESERT SPRING ST 21-36-9-18	36	090S	180E	4304736220	14763	State	State	GW	P
DESERT SPRING ST 12-36-9-18	36	090S	180E	4304736233	14764	State	State	GW	P
DESERT SPRING ST 43-36-9-18	36	090S	180E	4304736241	14992	State	State	GW	P
DESERT SPRING ST 34-36-9-18	36	090S	180E	4304736242	14716	State	State	GW	P
FEDERAL 14-31-9-19	31	090S	190E	4304736271	15884	Federal	Federal	GW	P
FEDERAL 12-31-9-19	31	090S	190E	4304736336	15086	Federal	Federal	GW	P
FEDERAL 21-31-9-19	31	090S	190E	4304736368	15605	Federal	Federal	GW	P
FEDERAL 23-31-9-19	31	090S	190E	4304736442	15715	Federal	Federal	GW	P
SHEEP WASH FED 43-25-9-18	25	090S	180E	4304736600	14977	Federal	Federal	GW	P
FEDERAL 43-19-9-19	19	090S	190E	4304736719	15186	Federal	Federal	GW	P
SHEEP WASH FED 21-25-9-18	25	090S	180E	4304736727	15475	Federal	Federal	GW	P
FEDERAL 21-30-9-19	30	090S	190E	4304736739	15476	Federal	Federal	GW	P
SHEEP WASH FED 23-25-9-18	25	090S	180E	4304736740	15213	Federal	Federal	GW	P
FEDERAL 23-19-9-19	19	090S	190E	4304736771	15355	Federal	Federal	GW	P
SHEEP WASH FED 41-25-9-18	25	090S	180E	4304736772	15338	Federal	Federal	GW	P
FEDERAL 41-30-9-19	30	090S	190E	4304736817	15212	Federal	Federal	GW	P
LAMB TRUST 34-22-9-19	22	090S	190E	4304736913	15187	Fee	Fee	GW	P
LAMB TRUST 14-14-9-19	14	090S	190E	4304736916	17012	Fee	Fee	GW	P
DESERT SPRING ST 33-36-9-18	36	090S	180E	4304737115	15011	State	State	GW	P
FEDERAL 14-17-9-19	17	090S	190E	4304737116	16163	Federal	Federal	GW	P
FEDERAL 34-18-9-19	18	090S	190E	4304737117	16275	Federal	Federal	GW	P
UTELAND ST 41-2-10-18	2	100S	180E	4304737132	15087	State	State	GW	P
UTELAND ST 43-2-10-18	2	100S	180E	4304737338	15365	State	State	GW	P
FEDERAL 41-19-9-19	19	090S	190E	4304737611	16311	Federal	Federal	GW	P
FEDERAL 32-30-9-19	30	090S	190E	4304737612	16051	Federal	Federal	GW	P
FEDERAL 12-30-9-19	30	090S	190E	4304737613	16052	Federal	Federal	GW	P
FEDERAL 21-19-9-19	19	090S	190E	4304737621	16253	Federal	Federal	GW	P
FEDERAL 14-18-9-19	18	090S	190E	4304737622	16264	Federal	Federal	GW	P
FEDERAL 34-30-9-19	30	090S	190E	4304737630	16557	Federal	Federal	GW	P
DESERT SPRING FED 21-1-10-18	1	100S	180E	4304737631	15961	Federal	Federal	GW	P
FEDERAL 12-1-10-18	1	100S	180E	4304737646	16023	Federal	Federal	GW	P
SHEEP WASH FED 14-25-9-18	25	090S	180E	4304737647	16121	Federal	Federal	GW	P
UTELAND ST 21-2-10-18	2	100S	180E	4304737676	16254	State	State	GW	P
UTELAND ST 12-2-10-18	2	100S	180E	4304737677	15806	State	State	GW	P
UTELAND ST 34-2-10-18	2	100S	180E	4304738028	16868	State	State	GW	P
FEDERAL 14-19-9-19	19	090S	190E	4304738336	16467	Federal	Federal	GW	P
FEDERAL 34-19-9-19	19	090S	190E	4304738337	16119	Federal	Federal	GW	P
SHEEP WASH FED 41-26-9-18	26	090S	180E	4304738351	16884	Federal	Federal	GW	P
SHEEP WASH FED 32-25-9-18	25	090S	180E	4304738352	16349	Federal	Federal	GW	P
SHEEP WASH FED 34-25-9-18	25	090S	180E	4304738353	16210	Federal	Federal	GW	P
FEDERAL 12-19-9-19	19	090S	190E	4304738407	16236	Federal	Federal	GW	P
SHEEP WASH FED 23-26-9-18	26	090S	180E	4304738465	16558	Federal	Federal	GW	P
SHEEP WASH FED 12-25-9-18	25	090S	180E	4304738469	16449	Federal	Federal	GW	P
FEDERAL 23-18-9-19	18	090S	190E	4304738575	16312	Federal	Federal	GW	P

LAMB TRUST 34-22A-9-19	22	090S	190E	4304738673	15832	Fee	Fee	GW	P
UTELAND FED 42-11-10-18	11	100S	180E	4304738896	16792	Federal	Federal	GW	P
STATE 21-32B	32	090S	190E	4304739170	16309	State	State	GW	P
STATE 22-32A	32	090S	190E	4304739171	16308	State	State	GW	P
STATE 21-32A	32	090S	190E	4304739172	16310	State	State	GW	P
FEDERAL 11-19-9-19	19	090S	190E	4304739717	17054	Federal	Federal	GW	P
SHEEP WASH FED 31-25-9-18	25	090S	180E	4304739729	17241	Federal	Federal	GW	P
SHEEP WASH FED 11-25-9-18	25	090S	180E	4304739730	17266	Federal	Federal	GW	P
DESERT SPG FED 41-1-10-18	1	100S	180E	4304739773	17013	Federal	Federal	GW	P
FED 32-19X-9-19(RIGSKID)	19	090S	190E	4304740233	17014	Federal	Federal	GW	P
FEDERAL 23-30G-9-19	30	090S	190E	4304751280	18211	Federal	Federal	OW	P
FEDERAL 34-19G-9-19	19	090S	190E	4304751281	18210	Federal	Federal	OW	P
FEDERAL 442-30-9-19	30	090S	190E	4304752870	19647	Federal	Federal	GW	P
FEDERAL 333-30-9-19	30	090S	190E	4304752872	19648	Federal	Federal	GW	P
FEDERAL 423-30-9-19	30	090S	190E	4304753011	19649	Federal	Federal	GW	P
Desert Springs State 412-36-9-18	36	090S	180E	4304753324	19783	State	State	GW	P
Desert Springs State 424-36-9-18	36	090S	180E	4304753325	19783	State	State	GW	P
Desert Springs State 133-36-9-18	36	090S	180E	4304753326	19747	State	State	GW	P
Desert Spring State 142-36-9-18	36	090S	180E	4304753327	19747	State	State	GW	P
DESERT SPRINGS ST 422-36-9-18	36	090S	180E	4304753328	19783	State	State	GW	P
WILKIN RIDGE ST 31-32-10-17	32	100S	170E	4301332677	15144	State	State	GW	S
SQUAW CROSSING U 5	2	100S	180E	4304730129	16266	State	State	OW	S
RBV 4-11D	11	100S	180E	4304730718	16269	Federal	Federal	OW	S
RBV 2-11D	11	100S	180E	4304730826	16270	Federal	Federal	OW	S
RBV 6-11D	11	100S	180E	4304731192	16271	Federal	Federal	OW	S
STATE 2-32B	32	090S	190E	4304732221	11371	State	State	GW	S
STATE 9-36A	36	090S	180E	4304732225	11364	State	State	GW	S
FEDERAL 13-30B	30	090S	190E	4304733581	13249	Federal	Federal	GW	S
STATE 13-36A	36	090S	180E	4304733598	17838	State	State	GW	S
FEDERAL 16-26A	26	090S	180E	4304733601	12928	Federal	Federal	GW	S
FEDERAL 31-29	29	090S	190E	4304733653	13077	Federal	Federal	GW	S
RBV 1-10D	10	100S	180E	4304734312	16265	Federal	Federal	OW	S
FEDERAL 13-18-9-19	18	090S	190E	4304739776	17149	Federal	Federal	GW	S