

EOG Resources, Inc.
P.O. Box 250
Big Piney, WY 83113

July 3, 2000

Utah Division of Oil, Gas, & Mining
1594 West North Temple
Box 145801
Salt Lake City, UT 84114-5801

RE: APPLICATION FOR PERMIT TO DRILL
CHAPITA WELLS UNIT #557-13F
SE/SW, SEC. 13, T9S, R22E
UINTAH COUNTY, UTAH
LEASE NO.: U-0282
FEDERAL LANDS

Enclosed please find a copy of the Application for Permit to Drill and associated attachments for the referenced well.

Please address further communication regarding this matter (including approval) to:

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Phone: (435)789-4120
Fax: (435)789-1420

Sincerely,



Ed Trotter
Agent
EOG Resources, Inc.

Attachments

UDOGM-BLM-EOG

RECEIVED

JUL 12 2000

DIVISION OF
OIL, GAS AND MINING

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK
DRILL **DEEPEN**

b. TYPE OF WELL
Oil Well Gas Well Other Single Zone Multiple Zone

2. Name of Operator
EOG RESOURCES, INC.

3. Address and Telephone Number
P.O. BOX 1815, VERNAL, UT 84078 (435)789-0790

4. Location of Well (Report location clearly and in accordance with any State requirements.)
At surface **600 FSL, 2150 FWL SE/SW**
At proposed prod. Zone **4432174N
637416E**

14. Distance in miles and direction from nearest town or post office
19.1 MILES SOUTHEAST OF OURAY, UTAH

15. Distance from proposed location to nearest property or lease line, ft.
600'
(Also to nearest drig. Unit line, if any)

16. No. of acres in lease
2440

17. No. of acres assigned to this well
40

18. Distance from proposed location to nearest well, drilling, completed, or applied for, on this lease, ft.

19. Proposed depth
6105'

20. Rotary or cable tools
ROTARY

21. Elevations (show whether DF, RT, GR, etc.)
4833 FEET GRADED GROUND

22. Approx. date work will start
SEPTEMBER 2000

5. Lease designation and serial number
U-0282

6. If Indian, Allottee or Tribe name
N/A

7. Unit Agreement Name
CHAPITA WELLS UNIT

8. Farm or lease name, well no.
CHAPITA WELLS UNIT

9. API Well no.
CWU 557-13F

10. Field and pool, or wildcat
CWU/WASATCH

11. Sec., T., R., M., or BLK. and survey or area
SEC. 13, T9S, R22E

12. County or parish
UINTAH

13. State
UTAH

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
11"	8 5/8"	24#	200' - 220'	100-150 SX CLASS "G" + 2%
or 12 1/4"	9 5/8"	32.30#	200 - 220'	CaCl2 + 1/4 #/SX CELLOFLAKE.
7 7/8"	4 1/2"	10.50#	6105'	50/50 POXMIX + 2% GEL + 10% SALT TO 400' ABOVE ALL ZONES OF INTEREST (+10% EXCESS). LIGHT CEMENT (11PPG+) + LCM TO 200' ABOVE OIL SHALE OR FRESH WATER INTERVALS (+ 5% EXCESS).

SEE ATTACHMENTS FOR:

- 8 POINT PLAN
- BOP SCHEMATIC
- SURFACE USE AND OPERATING PLAN
- LOCATION PLAT
- LOCATION LAYOUT
- TOPOGRAPHIC MAPS "A", "B", AND "C"
- GAS SALES PIPELINE—MAP "D"
- FACILITY DIAGRAM

CONFIDENTIAL

EOG RESOURCES, INC. WILL BE THE DESIGNATED OPERATOR OF THE SUBJECT LEASE UNDER A NATIONAL BOND #NM 2308

RECEIVED

JUL 12 2000

DIVISION OF OIL, GAS AND MINING

Pc: UTAH DIVISION OF OIL, GAS, AND MINING

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

SIGNED *Ed Smith* TITLE Agent DATE 7-10-2000

(This space for Federal or State office use)

PERMIT NO. 43047-33635 APPROVAL DATE _____

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY *Bradley G. Hill* **FEDERAL APPROVAL ACTION IS NECESSARY** REGULATION SPECIALIST III DATE 7/19/00


ENRON OIL & GAS CO.

T9S, R22E, S.L.B.&M.

Well location, CWU #557-13F, located as shown in the SE 1/4 SW 1/4 of Section 13, T9S, R22E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

BENCH MARK 61EAM 1965 LOCATED IN THE NE 1/4 OF SECTION 23, T9S, R22E, S.L.B.&M. TAKEN FROM THE RED WASH SW QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4938 FEET.

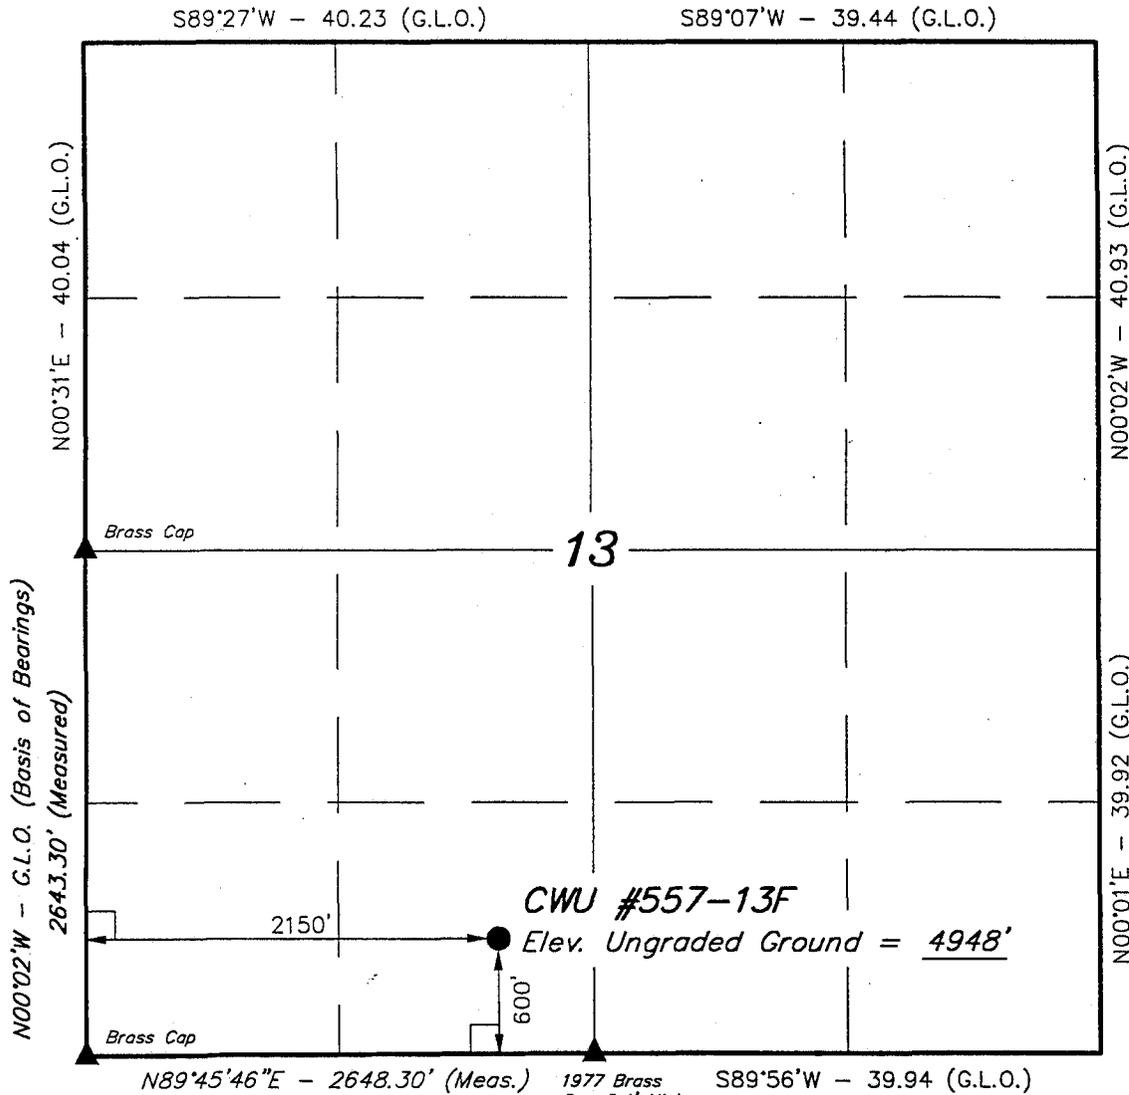


LEGEND:

- └ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

DIVISION OF OIL, GAS AND MINING

JUL 12 2000


RECEIVED



SCALE

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



UINTAH ENGINEERING & LAND SURVEYING 85 SOUTH 200 EAST - VERNAL, UTAH 84078 (435) 789-1017		
SCALE 1" = 1000'	DATE SURVEYED: 11-21-97	DATE DRAWN: 1-13-98
PARTY D.A. K.H. D.COX	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE ENRON OIL & GAS CO.	

EIGHT POINT PLAN

CHAPITA WELLS UNIT #557-13F

SE/SW, SEC. 13, T9S, R22E

UINTAH COUNTY, UTAH

1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:

FORMATION	DEPTH	TYPE ZONES	MAXIMUM PRESSURE
Green River	1729		
Oil Shale	1729		
Base "M" Marker	4434		
Wasatch	4774		
Peters Point	4774	GAS	
Chapita Wells	5304	GAS	
Buck Canyon	5864	GAS	

EST. TD 6105

Anticipated BHP 2600 PSI

3. PRESSURE CONTROL EQUIPMENT: BOP Schematic Diagram attached.

4. CASING PROGRAM:

<u>HOLE SIZE</u>	<u>INTERVAL</u>	<u>LENGTH</u>	<u>SIZE</u>	<u>WEIGHT</u>	<u>GRADE</u>	<u>THREAD</u>	<u>MINIMUM SAFETY FACTOR</u>		
							<u>COLLAPSE</u>	<u>BURST</u>	<u>TENSILE</u>
11	0' - 220'	200' - 220'	8 5/8	24.0 #	J-55	ST&C	1370 PSI	2950 PSI	263,000#
or									
12 1/4	0' - 220'	200' - 220'	9 5/8	32.3 #	H-40	ST&C	1370 PSI	2270 PSI	254,000#
7 7/8	0' - 6105'	6105'	4 1/2	10.5 #	J-55	ST&C	4010 PSI	4790 PSI	146,000#

If conductor drive pipe is used, it will be left in place if its total length is less than 20 feet below the surface. If the total length of the drive pipe is equal to or greater than 20 feet, it will be pulled prior to cementing surface casing, or it will be cemented in place. The minimum diameter of the conductor drive pipe will be 13 3/8".

All casing will be new or inspected.

RECEIVED

JUL 12 2000

**DIVISION OF
OIL, GAS AND MINING**

EIGHT POINT PLAN
CHAPITA WELLS UNIT #557-13F
SE/SW, SEC. 13, T9S, R22E
UINTAH COUNTY, UTAH

5. MUD PROGRAM

<u>INTERVAL</u>	<u>MUD TYPE</u>
0' - 220'	Air
240' - 4000'	Air/Mist & Aerated Water
4000' - TD	Air/3% KCL water or KCL substitute

Lost circulation probable from 1500' to 3000'+/-.

Sufficient mud inventory will be maintained on location during drilling to handle any adverse conditions that may arise.

6. VARIANCE REQUESTS:

- A. EOG Resources, Inc. requests a variance to regulations requiring a straight run blooie line (Where possible, a straight run blooie line will be used).
- B. EOG Resources, Inc. requests a variance to regulations requiring an automatic ignitor or continuous pilot light on the blooie line. (Not required on aerated water system).
- B. EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. To reduce location excavation, the blooie line will be 75' in length.

7. EVALUATION PROGRAM:

Logs: Schlumberger Platform Express
AIT-GR-SP-CAL T.D. to base of surface casing
FDC-CNL-GR-Cal-PE T.D. to 4300'

Cores: None Programmed
DST: None Programmed

Completion: To be submitted at a later date.

Note: If hole conditions prevent the running of open hole logs, a cased hole Dipole Sonic/Neutron/Gr will be run in lieu of open hole logs.

RECEIVED

JUL 12 2000

**DIVISION OF
OIL, GAS AND MINING**

EIGHT POINT PLAN

CHAPITA WELLS UNIT #557-13F
SE/SW, SEC. 13, T9S, R22E
UINTAH COUNTY, UTAH

8. ABNORMAL CONDITIONS:

None anticipated.

9. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Kelly Clock
- C. Stabbing Valve
- D. Visual Mud Monitoring

10. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

(Attachment: BOP Schematic Diagram)

RECEIVED

JUL 12 2000


**DIVISION OF
OIL, GAS AND MINING**

3000 PSIG DIAGRAM

ANNULAR PREVENTOR AND BOTH RAMS ARE 3000 RATED.
 CASING FLANGE IS 11" 3000 PSIG RATED.
 BOPE 11" 3000 PSIG

TESTING PROCEDURE:

1. BOPE 's will be tested with a professional tester to conform to Onshore Order #2 with retest every 14 days.
2. Blind & Pipe rams will be tested to rated working pressure, 3000 psig
3. Annular preventor will be tested to 50% of working pressure, 1500 psig
4. Casing will be tested to 0.22 psi/ft. or 1500 psig. Not to exceed 70% of burst strength, whichever is greater.
5. All lines subject to well pressure will be pressure tested to the same pressure as blind & pipe rams.
6. All BOPE specifications and configurations will meet Onshore Order #2 requirements for 3000 psig BOPE specifications.

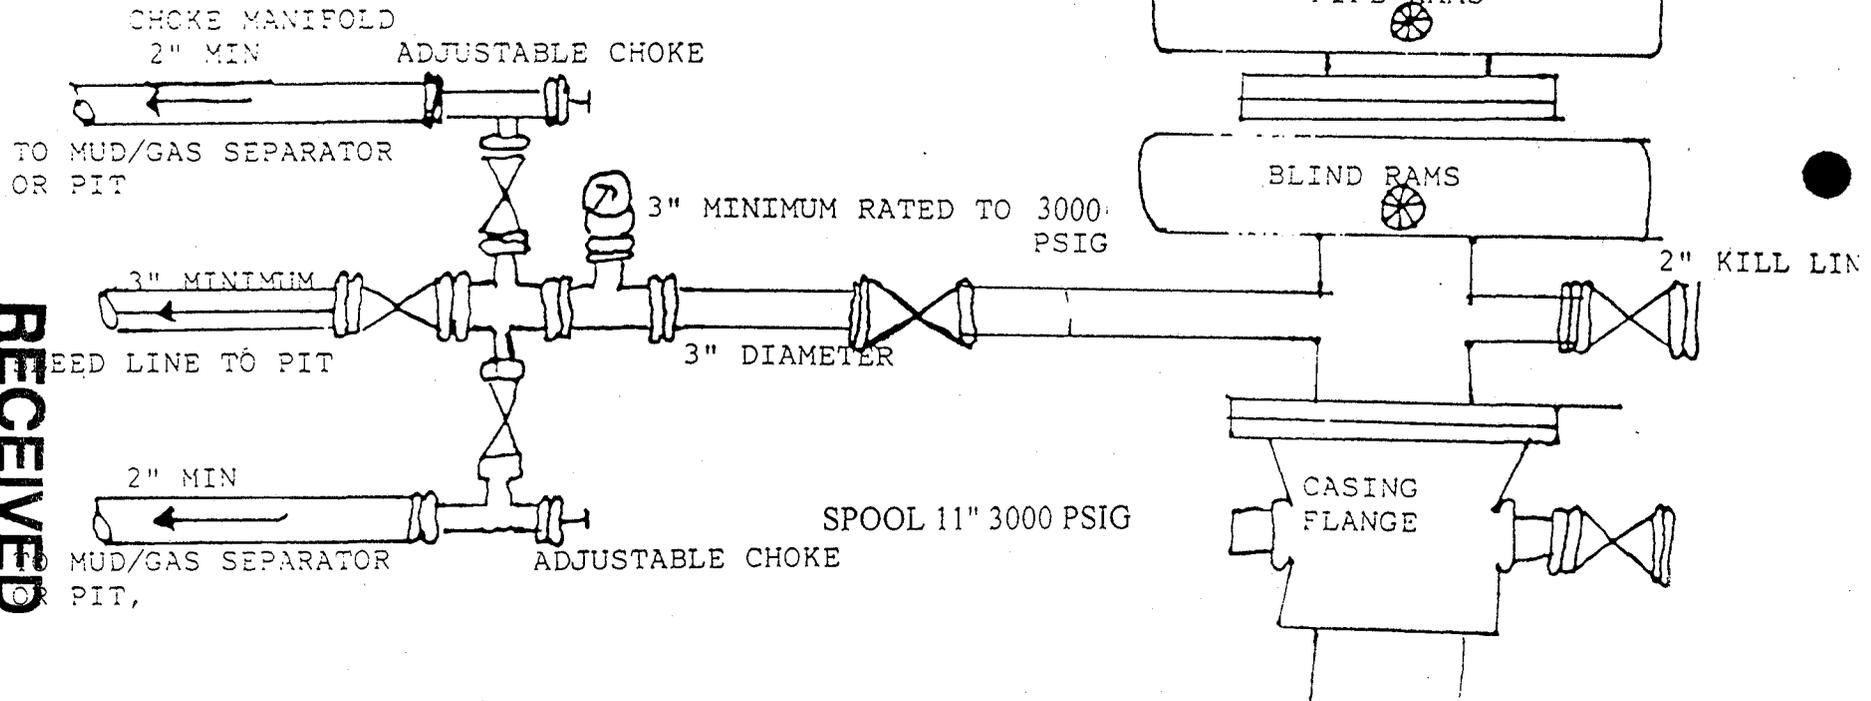

DIVISION OF OIL, GAS AND MINING

JUL 12 2000

RECEIVED

THIRTEEN POINT SURFACE USE PROGRAM

1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 19.1 miles southeast of Ouray, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

2. PLANNED ACCESS ROAD

- A. The access road will be approximately 400 feet in length. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/ 18 foot running surface.
- C. Maximum grade on access road will be 8%.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No culverts, bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of-Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

RECEIVED

JUL 12 2000

DIVISION OF
OIL, GAS AND MINING

3. LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION

- A. Water wells - None
- B. Abandoned wells - 1*
- C. Temporarily abandoned wells - None
- D. Disposal wells - None
- E. Drilling wells - None
- F. Producing wells - 17*
- G. Shut in wells - None
- H. Injection wells - None

(*See attached TOPO map "C" for location)

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

A. ON WELL PAD

- 1. Tank batteries - None
- 2. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of well head valves, combo separator-dehy unit with meter, 300 Bbl vertical or 200 Bbl low profile, condensate tank, and attaching piping. See attached facility diagram.
- 3. Oil gathering lines - None
- 4. Gas gathering lines - A 3" gathering line will be buried from dehy to the edge of the location.
- 5. Injection lines - None
- 6. Disposal lines - None
- 7. Surface pits - None

B. OFF WELL PAD

- 1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
- 2. A 3" OD steel above ground natural gas pipeline will be laid approximately 55' from proposed location to a point in the SE/SW of Section 13, T9S, R22E, where it will tie into Questar Pipeline Co.'s existing line. Proposed pipeline crosses Federal lands within the Chapita Wells Unit, thus a Right-of -Way grant will not be required.
- 3. Proposed pipeline will be a 3" OD steel, welded line laid on the surface.
- 4. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

RECEIVED

JUL 12 2000

**DIVISION OF
OIL, GAS AND MINING**

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery.

The production facilities will be placed on the west end of the location.

5. **LOCATION & TYPE OF WATER SUPPLY**

- A. Water supply will be from Ouray Municipal Water Plant at Ouray, Utah, and/or Target Trucking Inc.'s water source in the SW/SW, Sec. 35, T9S, R22E, Uintah County, Utah (State Water Right #49-1501). Produced water from the Chapita Wells and Stagecoach Units will also be used.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. **SOURCE OF CONSTRUCTION MATERIAL**

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. All construction material will come from Federal Land.
- C. No mineral materials will be required.

7. **METHODS OF HANDLING WASTE DISPOSAL**

A. METHODS AND LOCATION

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at an approved waste disposal facility.
- 4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. During the 90 day period, an application for approval of a permanent disposal method and location, together with the required water analysis, will be submitted for the AO's approval.
- 5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.

- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore

RECEIVED

JUL 12 2000

DIVISION OF
OIL, GAS AND MINING

hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

Burning of trash will not be allowed. All trash must be contained in a trash cage and hauled away to an approved disposal site at the completion of the drilling activities.

On BLM administered land:

The reserve pit will be constructed so as not to leak, break, or allow discharge.

The reserve pit shall be lined.

After first production, produced wastewater will be confined to a lined pit or storage tank for a period not to exceed ninety (90) days. During the 90 day period, in accordance with Onshore Order No. 7, an application for approval of a permanent disposal method and location, along with required water analysis, shall be submitted for the AO's approval. Failure to file an application within the time allowed will be considered an incident of noncompliance.

8. ANCILLARY FACILITIES

A. No airstrips or camps are planned for this well.

9. WELLSITE LAYOUT

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.
- D. The approved seed mixture for this location is:
 - 4 pounds Four Wing Salt Bush per acre
 - 3 pounds Shad Scale per acre
 - 3 pounds Needle and Thread Grass per acre
 - 2 pounds Western Wheat Grass per acre.

The reserve pit will be located on the north side of the location. The flare pit will be located downwind of the prevailing wind direction on the north side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled pit topsoil will be stored separate from the location topsoil at corner "C". The stockpiled location topsoil will be stored along the south side of the location between corners 2 and 8. Upon completion of construction, the stockpiled topsoil from the location will be broadcast

RECEIVED

JUL 12 2000

**DIVISION OF
OIL, GAS AND MINING**

seeded with the approved seed mixture for this location and then walked down with a cat.

Access to the well pad will be from the east.

N/A Diversion ditch(es) shall be constructed on the _____ side of the location (above/below) the cut slope, draining to the _____.

N/A Soil compacted earthen berm(s) shall be placed on the _____ side(s) of the location between the _____.

N/A The drainage(s) shall be diverted around the sides of the well pad location.

N/A The reserve pit and/or pad locations shall be constructed long and narrow for topographic reasons _____.

N/A Corner # _____ will be rounded off to minimize excavation.

FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BLM or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is to be regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently mounted on concrete bases. Prior to a new road, crossing any fence located on Federal land, or any fence between Federal land and private land, the operator will contact the BLM, who will in turn

RECEIVED

JUL 12 2000

**DIVISION OF
OIL, GAS AND MINING**

contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

10. PLANS FOR RESTORATION OF SURFACE

A. PRODUCING LOCATION

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The stockpiled pit topsoil will then be spread over the pit area and broadcast seeded with the prescribed seed mixture for this location. The seeded area will then be walked down with a cat.

B. DRY HOLE/ABANDONED LOCATION

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BLM will attach the appropriate surface rehabilitation conditions of approval.

11. SURFACE OWNERSHIP

Access road: Federal

Location: Federal

12. OTHER INFORMATION

A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:

-whether the materials appear eligible for the National Register of Historic Places;

-the mitigation measures the operator will likely have to undertake before the site can be used.

RECEIVED

JUL 12 2000

DIVISION OF
OIL, GAS AND MINING

-a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

- B. As operator, EOG Resources, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BLM, or the appropriate County Extension Office. On BLM administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.
- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on BLM lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

Additional Surface Stipulations

- N/A No construction or drilling activities shall be conducted between _____ and _____ because of _____.
- N/A No surface occupancy will be allowed within 1,000 feet of any sage grouse strutting ground.
- N/A No construction or exploration activities are permitted within a 1.5 mile radius of sage grouse strutting grounds from April 1 to June 30.
- N/A There shall be no surface disturbance within 600 feet of live water (includes stock tanks, springs, and guzzlers).
- N/A No cottonwood trees will be removed or damaged.
- N/A Pond will be constructed according to BLM specifications approximately _____ feet _____ of the location, as flagged on the onsite.

RECEIVED

JUL 12 2000

**DIVISION OF
OIL, GAS AND MINING**

LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION

OPERATIONS

EOG Resources, Inc.
P.O. Box 250
Big Piney, WY 83113
Jim Schaefer
Telephone (307)276-3331

EOG Resources, Inc.
P.O. Box 1815
Vernal, UT 84078
George McBride
Telephone (435)789-0790

PERMITTING

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Telephone: (435)789-4120
Fax: (435)789-1420

All lease or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. EOG Resources, Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.

Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions that presently exist; that the statements made in the Plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this Plan and the terms and conditions under which it is approved.

7-10-2000

Date



Agent

RECEIVED

JUL 12 2000

DIVISION OF
OIL, GAS AND MINING

SITE FACILITY DIAGRAM
CHAPITA WELLS UNIT #557-13F
SECTION 13, T9S, R22E, SE/4 SW/4
UINTAH COUNTY, UTAH
FEDERAL LEASE NUMBER U-0282
(Site Security Plan is on file at EOG Resources, Inc.'s Vernal Office)

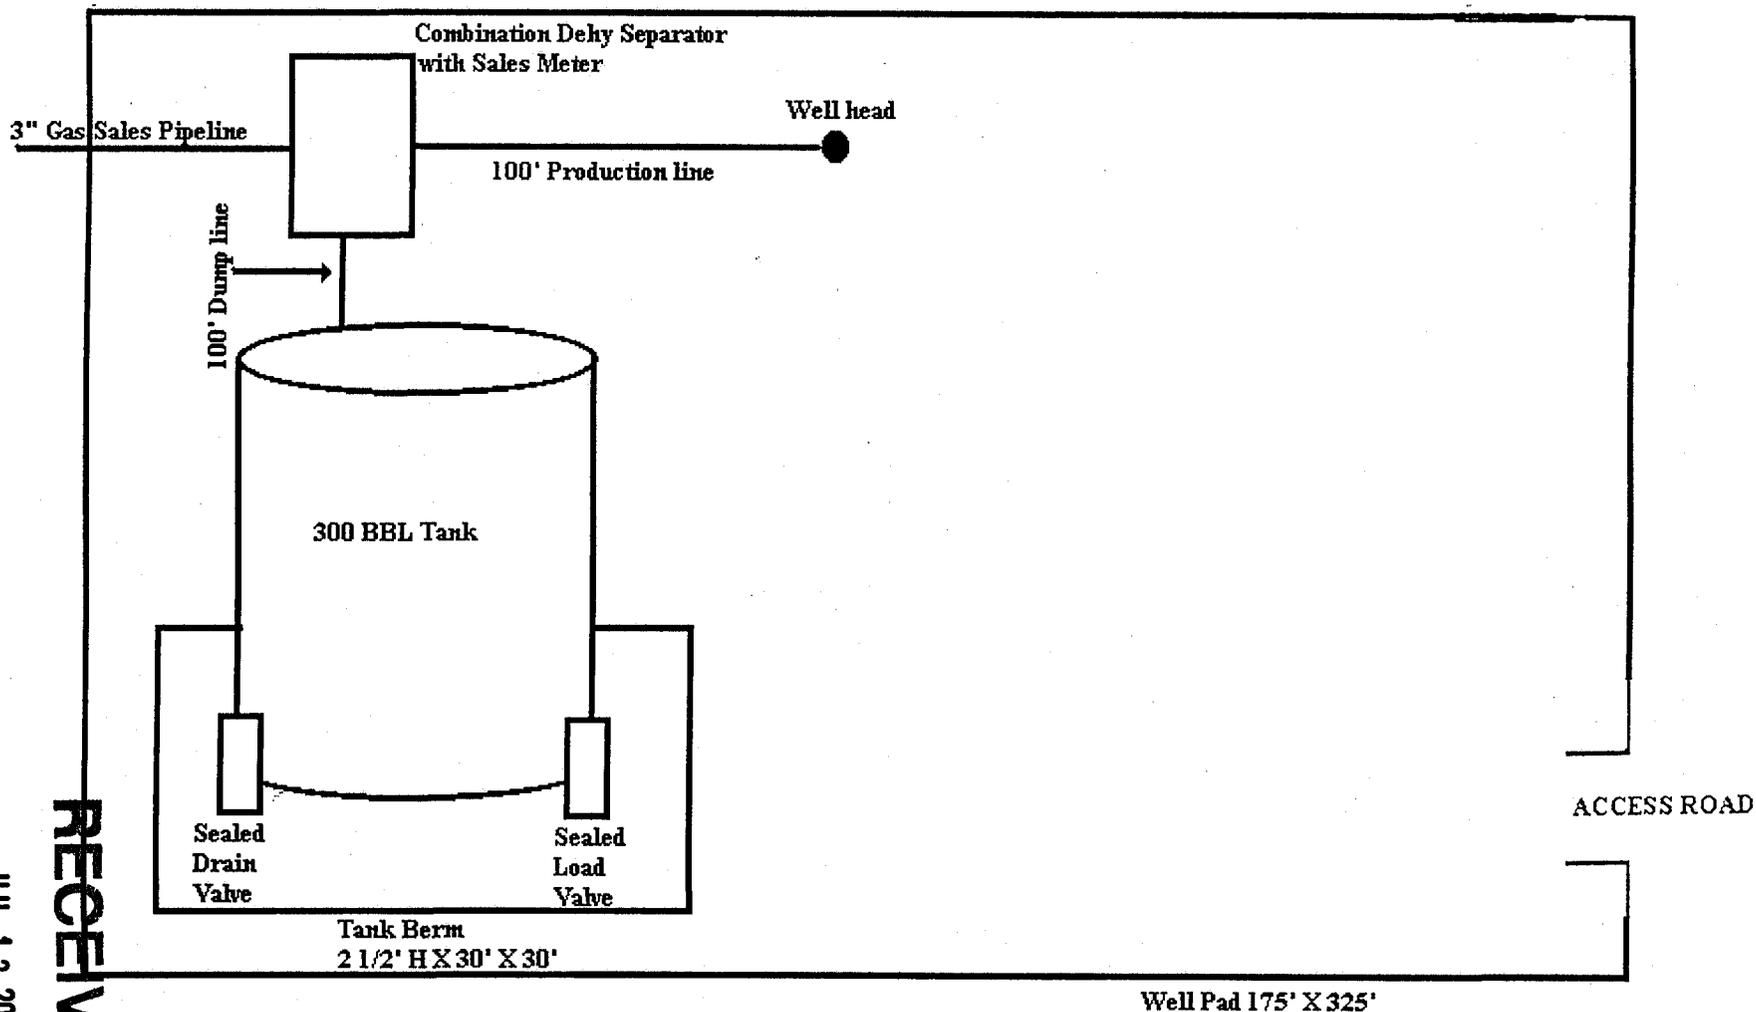

RECEIVED

JUL 12 2000


DIVISION OF
OIL, GAS AND MINING

ENRON OIL & GAS CO.

LOCATION LAYOUT FOR

CWU #557-13F
SECTION 13, T9S, R22E, S.L.B.&M.
600' FSL 2150' FWL

Proposed Access Road



F-0.8'
El. 46.8'

C-1.0'
El. 48.6'

C-4.7'
El. 52.3'

SCALE: 1" = 50'
DATE: 1-13-98
Drawn By: D.COX


RECEIVED

JUL 12 2000

DIVISION OF
OIL, GAS AND MINING

Sta. 3+25

Approx. Top of Cut Slope



NOTE:

Flare Pit is to be located a min. of 100' from the Well Head.







El. 46.1'
C-6.5'
(btm. pit)

F-1.1'
El. 46.5'

C-0.1'
El. 47.7'

C-2.8'
El. 50.4'

Sta. 1+50



Construct Diversion Ditch

El. 46.1'
C-6.5'
(btm. pit)

El. 46.2'
F-1.4'

F-1.5'
El. 46.1'

F-1.8'
El. 45.8'

Sta. 0+00

El. 45.7'
F-1.9'

Approx. Toe of Fill Slope

Elev. Ungraded Ground at Location Stake = 4947.7'
Elev. Graded Ground at Location Stake = 4947.6'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017



ENRON OIL & GAS CO.

TYPICAL CROSS SECTIONS FOR


CWU #557-13F

SECTION 13, T9S, R22E, S.L.B.&M.

600' FSL 2150' FWL




DATE: 1-13-98
Drawn By: D.COX


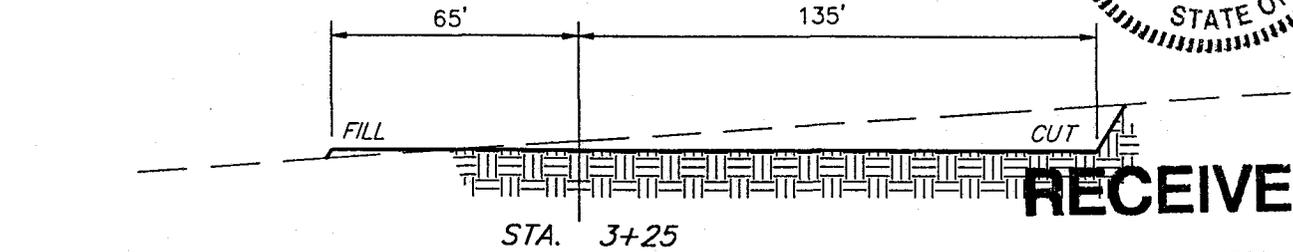


RECEIVED

JUL 12 2000

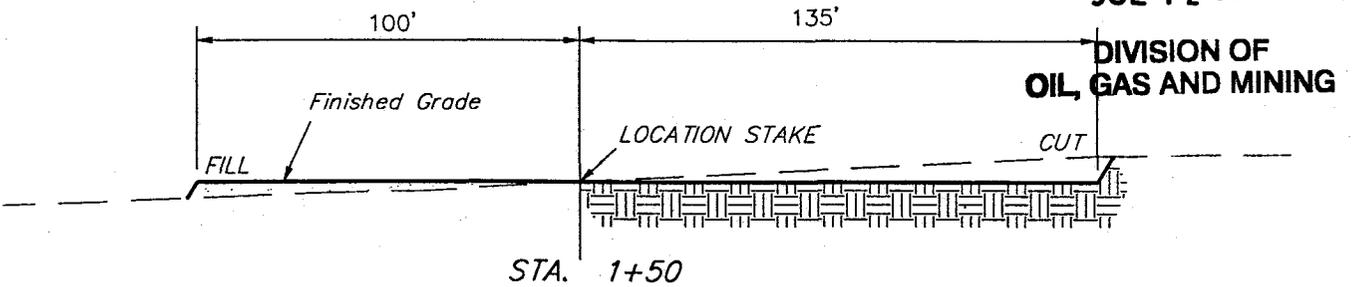

DIVISION OF
OIL, GAS AND MINING

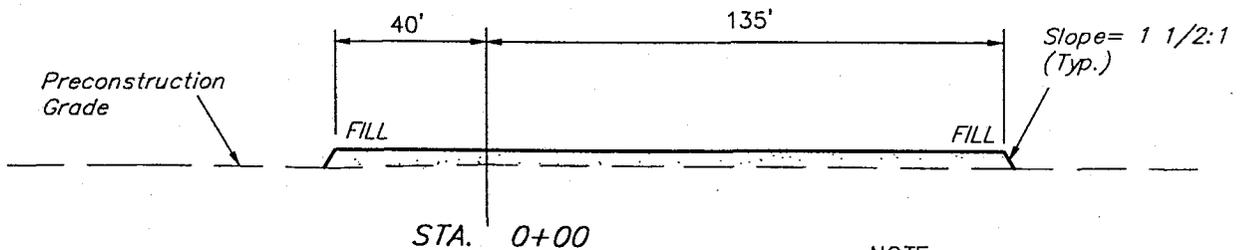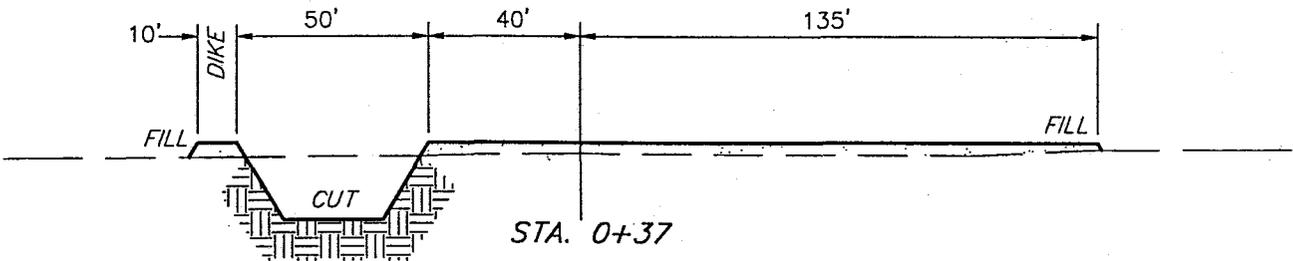

NOTE:


Topsoil should not be Stripped Below Finished Grade on Substructure Area.

APPROXIMATE YARDAGES

(6") Topsoil Stripping	=	1,250 Cu. Yds.
Remaining Location	=	2,470 Cu. Yds.
TOTAL CUT	=	3,720 CU.YDS.
FILL	=	1,730 CU.YDS.

EXCESS MATERIAL AFTER 5% COMPACTION	=	1,900 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	=	1,900 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	=	0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

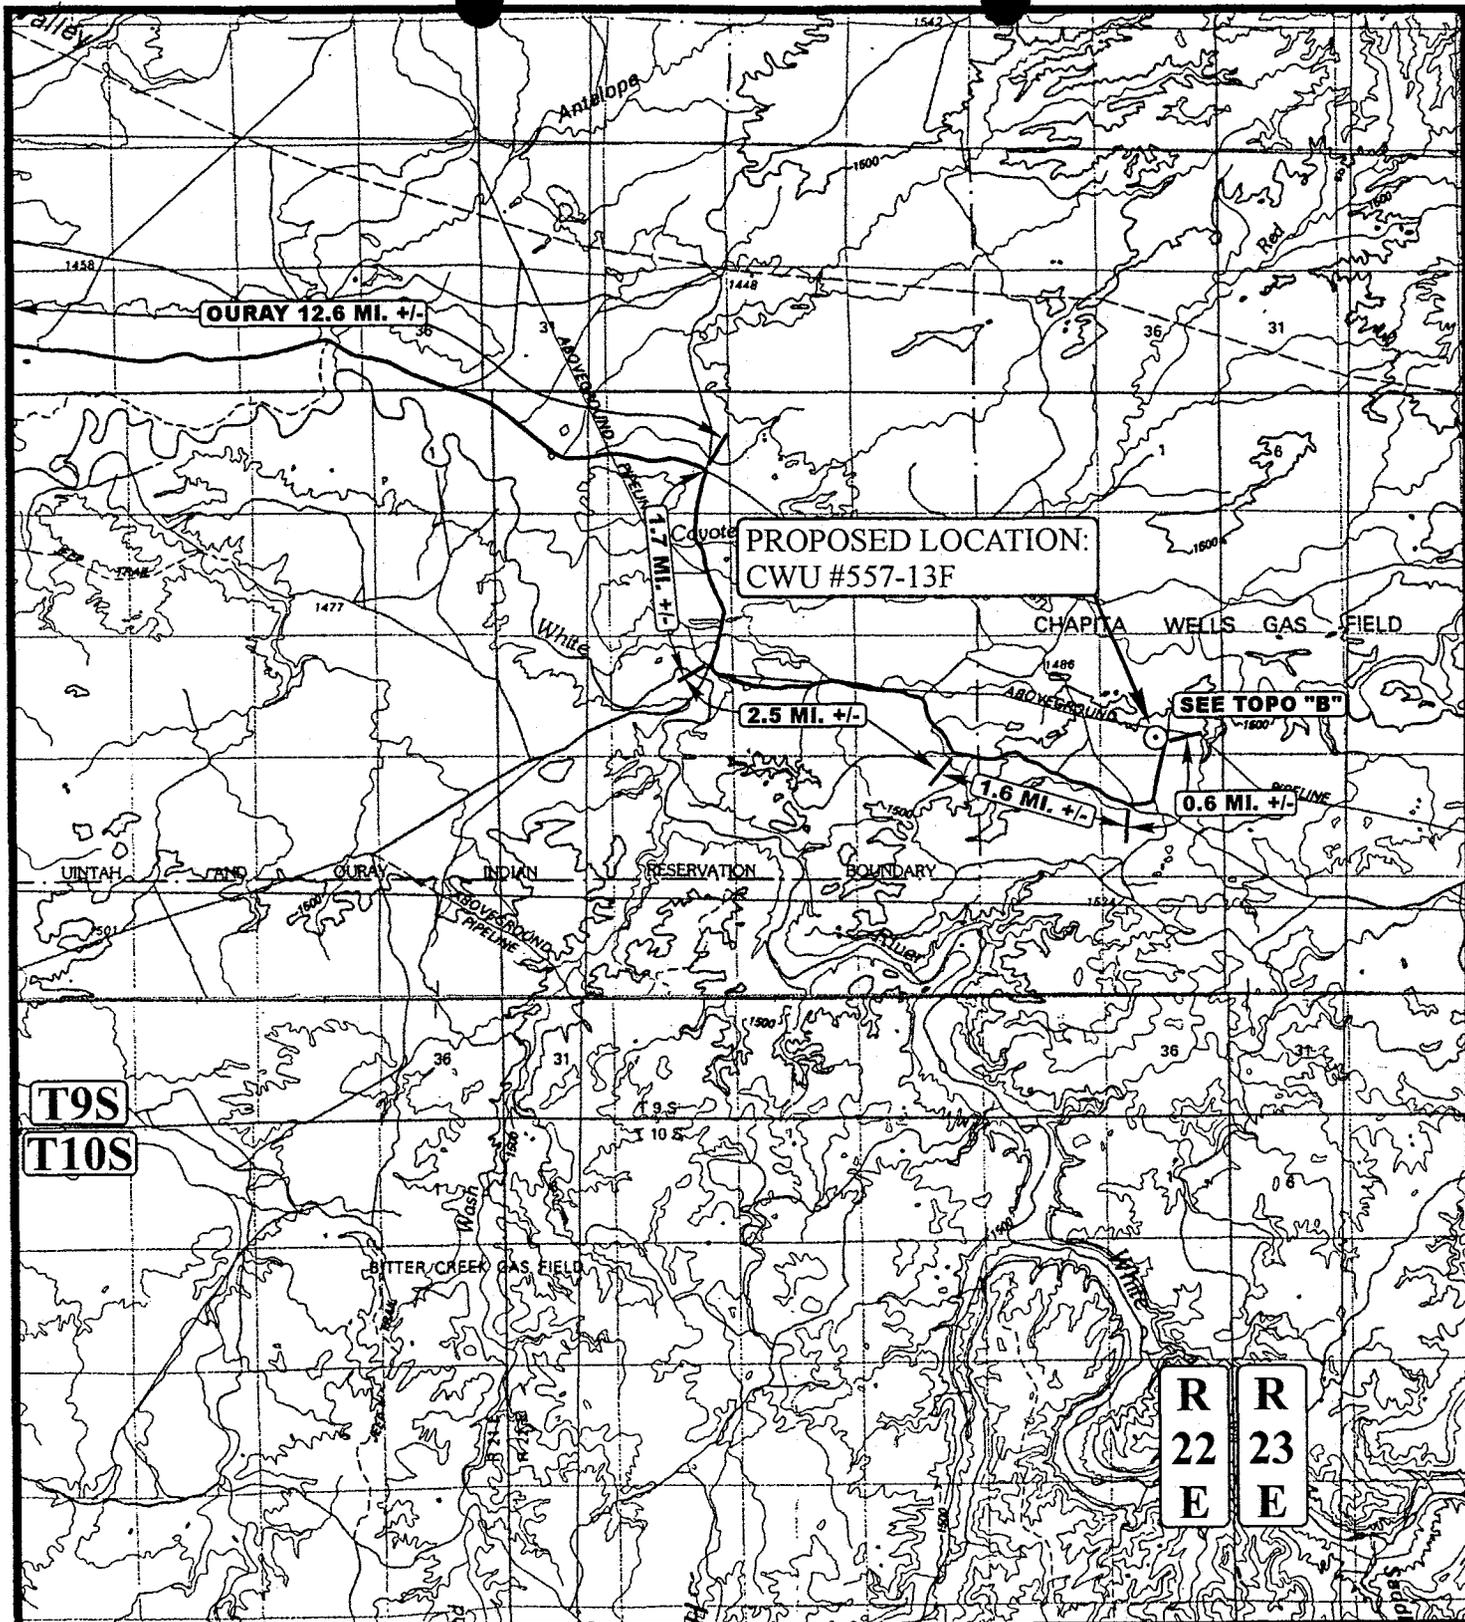

**PROPOSED LOCATION:
CWU #557-13F**

SEE TOPO "B"

**T9S
T10S**

**R 22 E
R 23 E**

LEGEND:

⊙ PROPOSED LOCATION

ENRON OIL & GAS COMPANY

**CWU #557-13F
SECTION 13, T9S, R22E, S.L.B.&M.
600' FSL 2150' FWL**




Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP
SCALE: 1 : 100,000 DRAWN BY: J.L.G. REVISED: 00-00-00

1 17 98
MONTH DAY YEAR



T9S

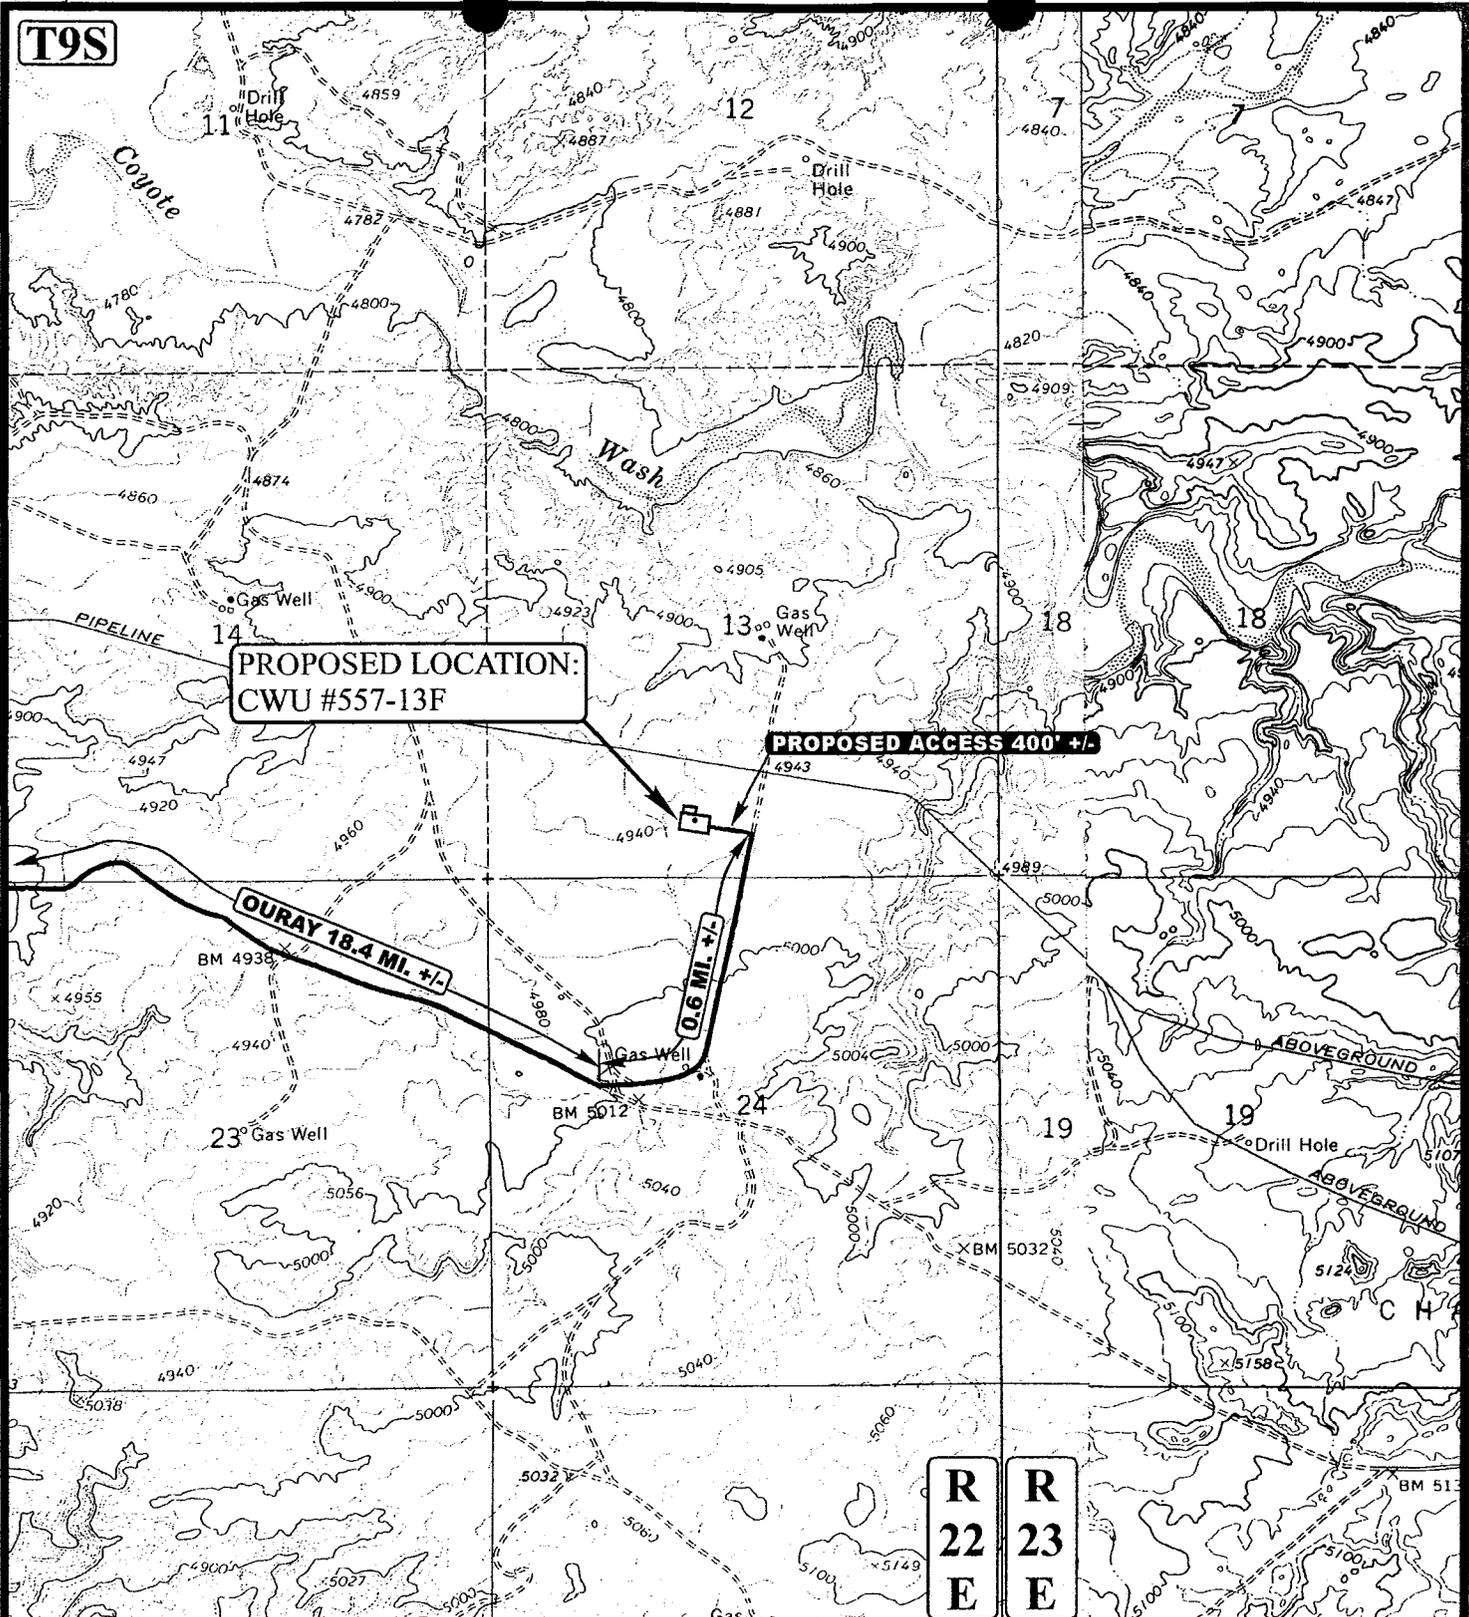

PROPOSED LOCATION:
CWU #557-13F

PROPOSED ACCESS 400' +/-

OURAY 18.4 MI. +/-

0.6 MI. +/-

R
22
E

R
23
E

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING ROAD

ENRON OIL & GAS COMPANY

CWU #557-13F
SECTION 13, T9S, R22E, S.L.B.&M.
600' FSL 2150' FWL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813




TOPOGRAPHIC
MAP

1 16 98
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: J.L.G. REVISED: 00-00-00

B
TOPO

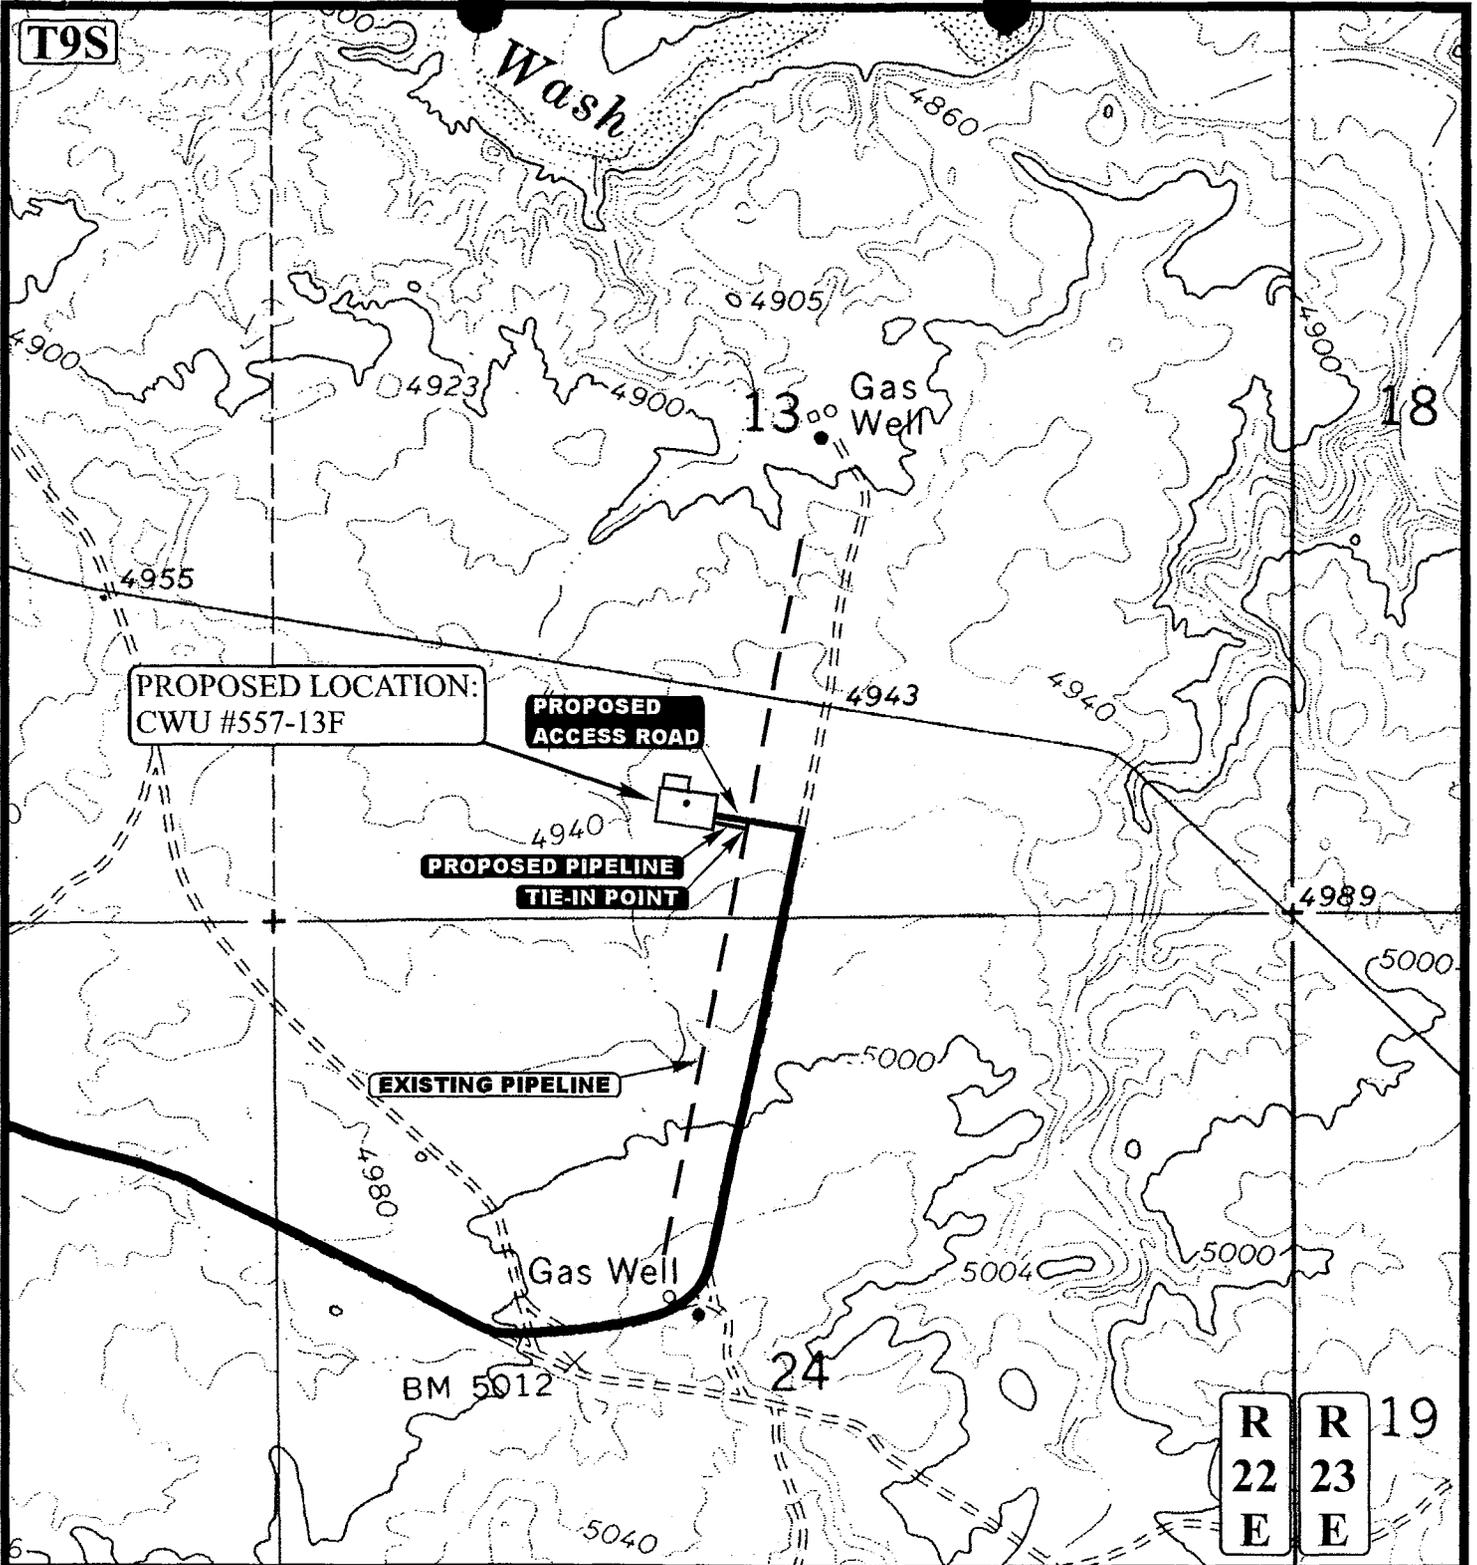

APPROXIMATE TOTAL PIPELINE DISTANCE = 55' +/-

LEGEND:

- EXISTING PIPELINE
- PROPOSED PIPELINE
- PROPOSED ACCESS

ENRON OIL & GAS COMPANY

CWU #557-13F
 SECTION 13, T9S, R22E, S.L.B.&M.
 600' FSL 2150' FWL



Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
 MAP**

1	16	98
MONTH	DAY	YEAR

SCALE: 1" = 1000' DRAWN BY: J.L.G. REVISED: 00-00-00

**D
 TOPO**

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 07/12/2000

API NO. ASSIGNED: 43-047-33635

WELL NAME: CWU 557-13F
 OPERATOR: EOG RESOURCES INC (N9550)
 CONTACT: ED TROTTER, AGENT

PHONE NUMBER: 435-789-4120

PROPOSED LOCATION:
 SESW 13 090S 220E
 SURFACE: 0600 FSL 2150 FWL
 BOTTOM: 0600 FSL 2150 FWL
 UINTAH
 NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1-Federal
 LEASE NUMBER: U-0282
 SURFACE OWNER: 1-Federal


PROPOSED FORMATION: WSTC

RECEIVED AND/OR REVIEWED:
 Flat
 Bond: Fed[1] Ind[] Sta[] Fee[]
 (No. NM 2308)
 Potash (Y/N)
 Oil Shale (Y/N) *190 - 5 (B)
 Water Permit
 (No. 49-1501)
 RDCC Review (Y/N)
 (Date: _____)
 Fee Surf Agreement (Y/N)

LOCATION AND SITING:
 ___ R649-2-3. Unit Chapite wells
 ___ R649-3-2. General
 Siting: _____
 ___ R649-3-3. Exception
 Drilling Unit
 Board Cause No: 179-8
 Eff Date: 8-10-99
 Siting: 400' fr. Unit Boundary
 ___ R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: ① FEDERAL APPROVAL
② OIL SHALE




Utah Oil Gas and Mining

OPERATOR: EOG RESOURCES(N9550)

FIELD: NATURAL BUTTES (630)

SEC. 12, 13 & 24, T9S, R22E,

COUNTY: UINTAH UNIT: CHAPITA WELLS
CAUSE: 179-8

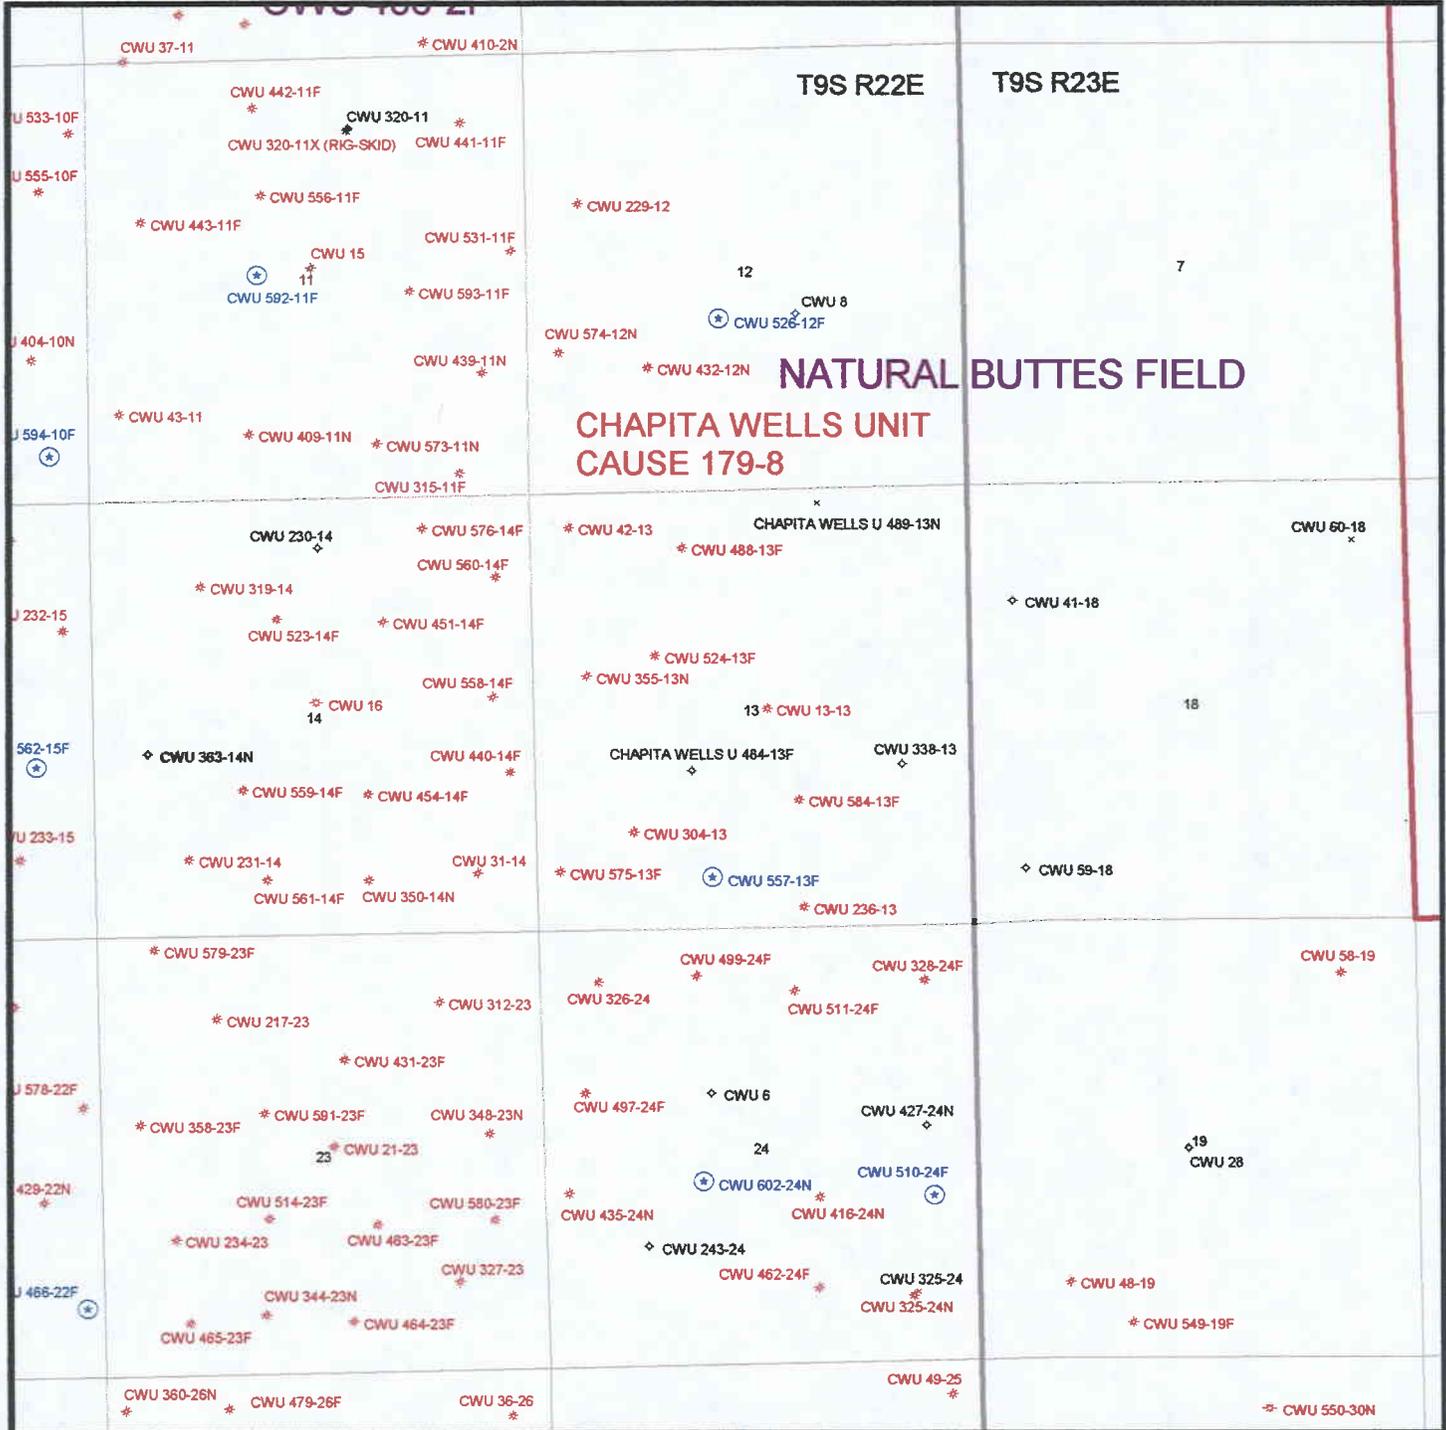



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt
Governor
Kathleen Clarke
Executive Director
Lowell P. Braxton
Division Director

1594 West North Temple, Suite 1210
PO Box 145801
Salt Lake City, Utah 84114-5801
801-538-5340
801-359-3940 (Fax)
801-538-7223 (TDD)

July 19, 2000

EOG Resources, Inc.
PO Box 1815
Vernal UT 84078


Re: Chapita Wells Unit 557-13F Well, 600' FSL, 2150' FWL, SE SW, Sec. 13, T. 9 South,
R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-33635.

Sincerely,



John R. Baza
Associate Director

cc:

Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: EOG Resources, Inc.
Well Name & Number Chapita Wells Unit 557-13F
API Number: 43-047-33635
Lease: U-0282

Location: SE SW **Sec.** 13 **T.** 9 South **R.** 22 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338
- Contact Robert Krueger at (801) 538-5274.

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

5. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK
DRILL **DEEPEN**

b. TYPE OF WELL
 Oil Gas Single Multiple
 Well Well Zone Zone

5. Lease designation and serial number
U-0282

6. If Indian, Allottee or Tribe name
N/A

7. Unit Agreement Name
CHAPITA WELLS UNIT

8. Farm or lease name, well no.
CHAPITA WELLS UNIT

9. API Well no.
CWU 557-13F

10. Field and pool, or wildcat
CWU/WASATCH

11. Sec., T., R., M., or BLK. and survey or area
SEC. 13, T9S, R22E

2. Name of Operator
EOG RESOURCES, INC.

3. Address and Telephone Number
P.O. BOX 1815, VERNAL, UT 84078 (435)789-0790

4. Location of Well (Report location clearly and in accordance with any State requirements.)
 At surface
600 FSL, 2150 FWL SE/SW
 At proposed prod. Zone

12. County or parish
UINTAH

13. State
UTAH

14. Distance in miles and direction from nearest town or post office
19.1 MILES SOUTHEAST OF OURAY, UTAH

15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. Unit line, if any)
600'

16. No. of acres in lease
2440

17. No. of acres assigned to this well
40

18. Distance from proposed location to nearest well, drilling, completed, or applied for, on this lease, ft.

19. Proposed depth
6105'

20. Rotary or cable tools
ROTARY

21. Elevations (show whether DF, RT, GR, etc.)
4833 FEET GRADED GROUND

22. Approx. date work will start
SEPTEMBER 2000

23. PROPOSED CASING AND CEMENTING PROGRAM				
SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
11"	8 5/8"	24#	200' - 220'	100-150 SX CLASS "G" + 2%
or 12 1/4"	9 5/8"	32.30#	200 - 220'	CaCl2 + 1/4 #/SX CELLOFLAKE.
7 7/8"	4 1/2"	10.50#	6105'	50/50 POXMIX + 2% GEL + 10%

- SEE ATTACHMENTS FOR:
- 8 POINT PLAN
 - BOP SCHEMATIC
 - SURFACE USE AND OPERATING PLAN
 - LOCATION PLAT
 - LOCATION LAYOUT
 - TOPOGRAPHIC MAPS "A", "B", AND "C"
 - GAS SALES PIPELINE—MAP "D"
 - FACILITY DIAGRAM

RECEIVED
 AUG 29 2000
 DIVISION OF
 OIL, GAS AND MINING

SALT TO 400' ABOVE ALL ZONES OF INTEREST (+10% EXCESS).
 LIGHT CEMENT (11PPG+) + LCM TO 200' ABOVE OIL SHALE OR FRESH WATER INTERVALS (+ 5% EXCESS).

EOG RESOURCES, INC. WILL BE THE DESIGNATED OPERATOR OF THE SUBJECT WELL UNDER NATIONWIDE BOND #NM 2308

Pc: UTAH DIVISION OF OIL, GAS, AND MINING

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

SIGNED *[Signature]* TITLE Agent DATE 7-10-2000

(This space for Federal or State office use)

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED APPROVAL DATE _____
 Applicant hereby warrants, represents and certifies that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

CONDITIONS OF APPROVAL, IF ANY:
 APPROVED BY *[Signature]* TITLE Assistant Field Manager DATE AUG 24 2000
Mineral Resources

OIL, GAS AND MINING
DIVISION OF

AUG 29 2000

RECEIVED

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: EOG Resources Inc.

Well Name & Number: CWU 557-13F

API Number: 43-047-33635

Lease Number: U - 0282

Location: SESW Sec. 13 T.09S R. 22E

Agreement: CHAPITA WELLS UNIT

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

AUG 29 2000

RECEIVED CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to Tim Ingwell of this office **prior to setting the next casing string or requesting plugging orders**. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a **3M** system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

If an air compressor is on location and is being utilized to provide air for the drilling medium while drilling, the special drilling requirements in Onshore Oil and Gas Order No. 2, regarding air or gas drilling shall be adhered to. If a mist system is being utilized then the requirement for a deduster shall be waived.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint. Surface casing setting depths are based on ground level elevations only.

As a minimum, the usable water shall be isolated and/or protected by having a cement top for the production casing at least 200 ft. above the base of the usable water zone, identified at 848 ft. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

AUG 29 2000

COAs Page 3 of 7
Well No.: CWU 557-13F

RECEIVED

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the AO. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vapor proof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the AO.

A cement bond log (CBL) will be run from the production casing shoe to top of the cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

AUG 29 2000

COAs Page 4 of 7
Well No.: CWU 557-13F

RECEIVED

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communication, not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5(d) shall be submitted to the appropriate Field Office within 60 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (1).

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the AO.

AUG 29 2000

COAs Page 5 of 7
Well No.: CWU 557-13F

RECEIVED

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries and tested for meter accuracy at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, please contact one of the following individuals:

Ed Forsman (435) 789-7077
Petroleum Engineer

Jerry Kenczka (435) 781-1190
Petroleum Engineer

BLM FAX Machine (435) 781-4410

AUG 29 2000

RECEIVED

EPAS LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids.

AUG 29 2000

RECEIVED

**SURFACE USE PROGRAM
Conditions of Approval (COAs)**

-The road shall be crowned at between 2 to 3 %.

-When plowing snow during the winter months, the snow shall be plowed outside of the borrow ditches to prevent the snow melt from saturating the road during the spring.

SPUDDING INFORMATION

Name of Company: EOG RESOURCES INC

Well Name: CWU 557-13F

Api No. 43-047-33635 LEASE TYPE: FEDERAL

Section 13 Township 09S Range 22E County UINTAH

Drilling Contractor DALL COOK DRILLING RIG # AIR

SPUDDED:

Date 01/11/2001

Time 12:00 NOON

How ROTARY

Drilling will commence _____

Reported by ED TROTTER

Telephone # 1-435-789-4120

Date 01/11/2001 Signed: CHD

ENTITY ACTION FORM - FORM 6

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	LOCATION				COUNTY	SPUD DATE	EFFECTIVE DATE
					QQ	SEC.	TP	RG			
B A	99999	4905	43-047-33635	CHAPITA WELLS UNIT 557-13F	SE/SW	13	9S	22E	UINTAH	1/11/2001	
1 COMMENTS: 1-12-01 CONFIDENTIAL											
B A	99999	2900	43-047-33782	NATURAL BUTTES UNIT 379-2E	NW/SW	2	9S	21E	UINTAH	1/03/2001	
2 COMMENTS: 1-12-01 CONFIDENTIAL											
B A	99999	2900	43-047-33779	NATURAL BUTTES UNIT 519-3E	NW/SW	3	9S	21E	UINTAH	1/05/2001	
3 COMMENTS: 1-12-01 CONFIDENTIAL											
B	99999	2900	43-047-33784	NATURAL BUTTES UNIT 484-20E	NW/NW	20	9S	21E	UINTAH	1/10/2001	
4 COMMENTS: 1-12-01 CONFIDENTIAL											
5 COMMENTS:											

ACTIONS CODES (See instructions on back of form)

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

(3/89)

STATE OF UTAH

Raty Carls
 Signature
 Regulatory Analyst
 Title
 1/12/2001
 Date
 (307) 276-3331
 Phone No.

OPERATOR ACCT. NO. N

T-619 P. 02/02 F-348

3072763335

From-EOG - BIG PINEY, WY.

Jan-12-01 11:14am

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Item No. 1004-015
Expires September 30, 1990

CONFIDENTIAL

SUNDRY NOTICE AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT --" for such proposals
SUBMIT IN TRIPLICATE

1. Type of Well Oil <input type="checkbox"/> WELL Gas <input checked="" type="checkbox"/> Well <input type="checkbox"/> Other		5. Lease Designation and Serial No. <i>U 0282</i>
2. Name of Operator <i>EOG Resources, Inc.</i>		6. If Indian, Allottee or Tribe Name
3. Address and Telephone No. <i>P.O. BOX 250, BIG PINEY, WY 83113 (307) 276-3331</i>		7. If Unit or C.A., Agreement Designation <i>CHAPITA WELLS UNIT</i>
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) <i>600' FSL - 2150' FWL (SE/SW) SECTION 13, T9S, R22E</i>		8. Well Name and No. <i>CHAPITA WELLS UNIT 557-13F</i>
		9. API Well No. <i>43-047-33635</i>
		10. Field and Pool or Exploratory Area <i>CHAPITA WELLS/WASATCH</i>
		11. County State <i>UINTAH, UTAH</i>

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> NOTICE OF INTENT	<input type="checkbox"/> ABANDONMENT
<input checked="" type="checkbox"/> SUBSEQUENT REPORT	<input type="checkbox"/> RECOMPLETION
<input type="checkbox"/> FINAL ABANDONMENT NOTICE	<input type="checkbox"/> PLUGGING BACK
	<input type="checkbox"/> CASING REPAIR
	<input type="checkbox"/> ALTERING CASING
	<input checked="" type="checkbox"/> OTHER
	<input type="checkbox"/> CHANGE OF PLANS
	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> NON-ROUTINE FRACTURING
	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> CONVERSION TO INJECTION

(Note: Report results of multiple completion on Well Completions or Recompletion Report and Log Form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details and give pertinent dates, including estimated date of starting any proposed work if well is directionally drilled give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work).

EOG Resources, Inc. spud 12-1/4" surface hole at the subject location 1/11/2001. The contractor was Dall Cook's Air Drilling. Ed Forsman of the Vernal BLM District office and Carol Daniels of the Utah Division of Oil, Gas & Mining were notified of spud 1/11/2001.

RECEIVED

JAN 16 2001

DIVISION OF
OIL, GAS AND MINING

*NOTE: EOG Resources, Inc. will be using Nationwide Bond #NM 2308

14. I hereby certify that the foregoing is true and correct

SIGNED *Kate Carlson* TITLE *Regulatory Analyst* DATE *1/12/2001*

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____

CONDITIONS OF APPROVAL, IF ANY:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
U 0282

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
CHAPITA WELLS

8. Well Name and No.
CHAPITA WELLS 557-13F

9. API Well No.
43-047-33635

10. Field and Pool, or Exploratory
CHAPITA WELLS/WASATCH

11. County or Parish, and State
UINTAH COUNTY, UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

CONFIDENTIAL

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
EOG RESOURCES, INC. Contact: KATY CARLSON
E-Mail: Kathleen_Carlson@EOGResources.com

3a. Address
P.O. BOX 250
BIG PINEY, WY 83113

3b. Phone No. (include area code)
Ph: 307.276.4842

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 13 T9S R22E SESW 600FSL 2150FWL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc plugged & abandoned the subject well as follows:
1st plug from 4590'-4890' w/130 sx Class "G" cement.
2nd plug from 1490'-1790' w/200 sx Class "G" cement.
3rd plug from 942'-629' w/250 sx Class "G" cement.
4th plug 282' to surface w/120 sx Class "G" cement.
Set dry hole marker w/120 sx Class "G" cement 1/25/2002.

Plug and abandon witnessed by Jerry Barnes & Alan Walker, BLM representatives.

14. I hereby certify that the foregoing is true and correct.
Electronic Submission #10977 verified by the BLM Well Information System For EOG RESOURCES, INC., will be sent to the Vernal

Name (Printed/Typed) KATY CARLSON Title REGULATORY ANALYST

Signature (Electronic Submission) Date 03/28/2002

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

RECEIVED

Approved By _____ Title _____ Date APR 01 2002

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make, to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** DRAFT ** DRAFT ** DRAFT ** DRAFT ** DRAFT ** DRAFT ** DRAFT ****

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: November 30, 2000

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. Lease Serial No.
U 0282

1a. Type of Well Oil Well Gas Well Dry Other
b. Type of Completion New Well Work Over Deepen Plug Back Diff. Resvr.
Other _____

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No.
CHAPITA WELLS

2. Name of Operator
EOG RESOURCES, INC. Contact: KATY CARLSON
E-Mail: Kathleen_Carlson@EOGResources.com

8. Lease Name and Well No.
CHAPITA WELLS UNIT 557-13F

3. Address P.O. BOX 250
BIG PINEY, WY 83113

3a. Phone No. (include area code)
Ph: 307.276.4842

9. API Well No.
43-047-33635

4. Location of Well (Report location clearly and in accordance with Federal requirements)*
At surface SESW 600FSL 2150FWL
At top prod interval reported below SESW 600FSL 2150FWL
At total depth SESW 600FSL 2150FWL

CONFIDENTIAL

10. Field and Pool, or Exploratory
CHAPITA WELLS/WASATCH

11. Sec., T., R., M., or Block and Survey
or Area Sec 13 T9S R22E Mer

12. County or Parish
UINTAH 13. State
UT

14. Date Spudded
01/11/2001

15. Date T.D. Reached
01/22/2002

16. Date Completed
 D & A Ready to Prod.
01/25/2002

17. Elevations (DF, KB, RT, GL)*
4948 GL

18. Total Depth: MD 6200
TVD

19. Plug Back T.D.: MD
TVD

20. Depth Bridge Plug Set: MD
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
DIPOLE SONIC IMAGER, GR & CBL/VDL/GR/CCD
PE/AP/QL-1-31-01 AI/LC/GR-1-31-01
CN/LD/GR-1-31-01

22. Was well cored? No Yes (Submit analysis)
Was DST run? No Yes (Submit analysis)
Directional Survey? No Yes (Submit analysis)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12.250	8.625 J-55	24.0		237		125			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)

25. Producing Intervals

26. Perforation Record

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A)						
B)						
C)						
D)						

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and Type of Material

CONFIDENTIAL
PERIOD
EXPIRED
ON 02/25/03

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	PA
			→						

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
			→						

(See Instructions and spaces for additional data on ELECTRONIC SUBMISSION #11033 VERIFIED BY THE BLM WELL INFORMATION SYSTEM

** DRAFT ** DRAFT ** DRAFT ** DRAFT ** DRAFT ** DRAFT **

JUN 10 2002

DIVISION OF
OIL, GAS AND MINING

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

29. Disposition of Gas(Sold, used for fuel, vented, etc.)
UNKNOWN

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
GREEN RIVER	7290	4434		GREEN RIVER	1680
BASE M MARKER	4434	4774		BASE M MARKER	4516
PETER'S POINT	4774	5304		N LIMESTONE	4663
CHAPITA WELLS	5304	5864		PETER'S POINT	4653
BUCK CANYON	5864	6200		CHAPITA WELLS	5312
				C-7 (CC)	5465
				C-13 (C BASAL)	5972
				BUCK CANYON	5979
				B-3	6017

32. Additional remarks (include plugging procedure):
WELL IS P&A'D 1/25/2002.

33. Circle enclosed attachments:

- 1. Electrical/Mechanical Logs (1 full set req'd.)
- 2. Geologic Report
- 3. DST Report
- 4. Directional Survey
- 5. Sundry Notice for plugging and cement verification
- 6. Core Analysis
- 7 Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions):

Electronic Submission #11033 Verified by the BLM Well Information System.
For EOG RESOURCES, INC., will be sent to the Vernal

Name (please print) KATY CARLSON Title REGULATORY ANALYST

Signature (Electronic Submission) *Katy Carlson* Date 04/04/2002

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** DRAFT ** DRAFT ** DRAFT ** DRAFT ** DRAFT ** DRAFT ** DRAFT ****