



**EOG Resources, Inc.**  
600 Seventeenth Street  
Suite 1100N  
Denver, CO 80202  
(303) 572-9000  
Fax: (303) 824-5400

July 25, 2000

Mr. Donald H. Spicer  
Coastal Oil & Gas Corporation  
9 Greenway Plaza  
Houston, Texas 77046-0995

RE: Designation of Agent  
Natural Buttes Unit  
Uintah County, Utah  
Natural Buttes Prospect  
1540-AA29, 0050608-000, 0050622-000,  
0050623-000, 0050636-000, 0050637-000,  
0050642-000, 0050650-000 and  
0050686-000

Dear Don:

Enclosed, for your files, is a copy of a blanket Designation of Agent pertaining to EOG Resources, Inc.'s proposed ten (10) wells listed on Exhibit "A" thereto, which has been approved by the Bureau of Land Management effective July 21, 2000.

If you need anything further, please advise.

Yours very truly,

**EOG RESOURCES, INC.**

Toni Lei Miller  
Project Landman

TLM/das  
Enclosure  
18384T

cc: Vernal District, BLM (with copy enclosure)  
Division of Oil, Gas and Mining (with copy of enclosure)  
Ed Trotter (with copy of enclosure)  
Jim Schaefer, EOG - Big Piney (with copy of enclosure)  
George McBride, EOG - Vernal (with copy of enclosure)  
Theresa Wysocki, EOG - Houston (with copy of enclosure)

**RECEIVED**

JUL 28 2000

DIVISION OF  
OIL, GAS AND MINING

**RECEIVED**

JUL 25 2000

DIVISION OF  
OIL, GAS AND MINING

DESIGNATION OF AGENT

Robert A. Henricks  
Chief, Branch of Fluid Minerals

The undersigned is, on the records of the Bureau of Land Management, Unit Operator under the Natural Buttes Unit Agreement, Uintah County, Utah, No. 14-08-00018900 approved January 5, 1968, and hereby designates:

**NAME:** EOG Resources, Inc.

**ADDRESS:** P.O. Box 1815  
Vernal, Utah 84078

as its agent, with full authority to act in its behalf in complying with the terms of the unit agreement and regulations applicable thereto and on whom the supervisor or his representative may serve written or oral instructions in securing compliance with the Oil and Gas Operating Regulations with respect to drilling, testing, and completing the unit wells listed on the attached Exhibit "A" which are located in Uintah County, Utah.


This designation of agent does not relieve the Unit Operator of responsibility for compliance with the terms of the unit agreement. It is also understood that this designation of agent does not constitute an assignment of any interest under the unit agreement or any lease committed thereto.

The designated agent will be responsible for compliance with the Oil and Gas Operating Regulations as they relate to the drilling, testing, and completing of each of the subject wells. In accordance with 3104.2, bonding shall be provided by EOG Resources, Inc., Bond No. NM2308.

This designation of agent is deemed to be temporary and in no manner a permanent arrangement.

This designation is given only to enable the agent herein designated to drill the above specified unit wells. Unless sooner terminated, this designation shall terminate as to each well when there is filed in the appropriate district office of the Bureau of Land Management a completed file of all required Federal reports pertaining to that well. At which time the Unit Operator shall assume all liability of that well and bonding shall be provided by the Unit Operator or as otherwise arranged by the unit agreement. It is also understood that this designation of agent is limited to field operations and does not cover administrative actions requiring specific authorization of the Unit Operator.

**COASTAL OIL & GAS CORPORATION, Unit Operator**

By: 

Dwayne G. Jammal, Vice President

Date: June 21, 2000

**APPROVED - EFFECTIVE JUL 21 2000**

  
CHIEF, BRANCH OF FLUID MINERALS  
BUREAU OF LAND MANAGEMENT

RAH:m

EXHIBIT "A"

Attached to and made a part of that certain Designation of Agent dated June 21, 2000, from Coastal Oil & Gas Corporation to EOG Resources, Inc.

WELL NAME	LOCATION			
	DIV	SEC	TWP	RGE
NBU 326-4E	SWNW	4	10	21
NBU 379-2E	NWSW	2	9	21
NBU 422-29E	SWNW	29	9	21
NBU 424-32E	NENE	32	9	21
NBU 516-12E	NWSE	12	10	20
NBU 519-3E	NWSW	3	9	21
NBU 521-8E	NWSW	8	9	21
NBU 522-10E	SESE	10	9	21
NBU 523-12E	SESE	12	10	20
NBU 524-12E	SWSE	12	10	20

All Township and Range references are South and East of the Salt Lake Meridian in Uintah County, Utah.



**EOG Resources, Inc.**  
600 Seventeenth Street  
Suite 1100N  
Denver, CO 80202  
(303) 572-9000  
Fax: (303) 824-5400

September 19, 2000  
VIA FAX #801-359-3940 and U.S. Mail

Ms. Lisha Cordova  
State of Utah  
Division of Oil, Gas and Mining  
1594 West North Temple, Suite 1210  
P.O. Box 145801  
Salt Lake City, Utah 84114-5801

RE: Compliance with Board Order  
in Cause No. 173-14  
Natural Buttes Unit Area  
1540-G06, 1540-AA29

Dear Lisha:

As we discussed during our telephone conversation yesterday afternoon, EOG Resources, Inc. has submitted or will be submitting Applications for Permit to Drill the following described Wasatch formation wells within the Natural Buttes Unit Area pursuant to BLM-approved Designations of Agent from the Unit Operator, Coastal Oil & Gas Corporation:

1. NBU 326-4E  
1906' FNL, 695' FWL (SW/4NW/4)  
Sec. 4-10S-21E, SLM  
Uintah County, Utah
2. NBU 379-2E  
1967' FSL, 898' FWL (NW/4SW/4)  
Sec. 2-9S-21E, SLM  
Uintah County, Utah
3. NBU 392-6E  
1926' FSL, 611' FEL (NE/4SE/4)  
Sec. 6-10S-21E, SLM  
Uintah County, Utah
4. NBU 422-29E  
1980' FNL, 785' FWL (SW/4NW/4)  
Sec. 29-9S-21E, SLM  
Uintah County, Utah

**RECEIVED**

SEP 21 2000

DIVISION OF  
OIL, GAS AND MINING

5. NBU 424-32E  
744' FNL, 773' FEL (NE/4NE/4)  
Sec. 32-9S-21E, SLM  
Uintah County, Utah
6. NBU 484-20E  
350' FNL, 823' FWL (NW/4NW/4)  
Sec. 20-9S-21E, SLM  
Uintah County, Utah
7. NBU 516-12E  
1950' FSL, 1786' FEL (NW/4SE/4)  
Sec. 12-10S-20E, SLM  
Uintah County, Utah
8. NBU 519-3E  
1749' FSL, 798' FWL (NW/4SW/4)  
Sec. 3-9S-21E, SLM  
Uintah County, Utah
9. NBU 521-8E  
2250' FSL, 900' FWL (NW/4SW/4)  
Sec. 8-9S-21E, SLM  
Uintah County, Utah
10. NBU 522-10E  
732' FSL, 841' FEL (SE/4SE/4)  
Sec. 10-9S-21E, SLM  
Uintah County, Utah
11. NBU 523-12E  
660' FSL, 660' FEL (SE/4SE/4)  
Sec. 12-10S-20E, SLM  
Uintah County, Utah
12. NBU 524-12E  
841' FSL, 1795' FEL (SW/4SE/4)  
Sec. 12-10S-20E, SLM  
Uintah County, Utah

**RECEIVED**

SEP 21 2000

DIVISION OF  
OIL, GAS AND MINING

State of Utah  
September 19, 2000  
Page 3

Each one of these proposed twelve (12) wells has been staked and will be drilled to the Unitized Interval at a location in the Natural Buttes Unit Area which is not closer than 460 feet from the Unit boundary and not closer than 460 feet from any uncommitted tracts of lands therein in full compliance with the Utah Board of Oil, Gas and Mining's Consolidated Order in Cause Nos. 173-14 and 173-15.

If you have any questions or need anything further, please do not hesitate to contact the undersigned.

Yours very truly,

**EOG RESOURCES, INC.**



Toni Lei Miller  
Project Landman

TLM/kse  
(m:\t\m\sept\Utahltr.doc)

cc: Ed Trotter  
Jim R. Schaefer

**RECEIVED**

SEP 21 2000

DIVISION OF  
OIL, GAS AND MINING

**EOG Resources, Inc.**  
**P.O. Box 250**  
**Big Piney, WY 83113**

August 28, 2000

Utah Division of Oil, Gas, & Mining  
1594 West North Temple  
Box 145801  
Salt Lake City, UT 84114-5801

RE: APPLICATION FOR PERMIT TO DRILL  
NATURAL BUTTES UNIT #326-4E  
SW/NW, SEC. 4, T10S, R21E  
UINTAH COUNTY, UTAH  
LEASE NO.: U-01393-B  
FEDERAL LANDS

Enclosed please find a copy of the Application for Permit to Drill and associated attachments for the referenced well.

Please address further communication regarding this matter (including approval) to:

Ed Trotter  
P.O. Box 1910  
Vernal, UT 84078  
Phone: (435)789-4120  
Fax: (435)789-1420

Sincerely,



Ed Trotter  
Agent  
EOG Resources, Inc.

Attachments

UDOGM-BLM-EOG

**RECEIVED**

SEP 22 2000

DIVISION OF  
OIL, GAS AND MINING

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK  
**DRILL**       **DEEPEN**

b. TYPE OF WELL  
 Oil Well       Gas Well       Other       Single Zone       Multiple Zone

2. Name of Operator  
**EOG RESOURCES, INC.**

3. Address and Telephone Number  
**P.O. BOX 1815, VERNAL, UT 84078 (435)789-0790**

4. Location of Well (Report location clearly and in accordance with any State requirements.)  
 At surface: **1906' FNL & 695' FWL SW/NW**      *4426255 N*  
 At proposed prod. Zone: *622637 E*

5. Lease designation and serial number  
**U-01393-B**

6. If Indian, Allottee or Tribe name  
**N/A**

7. Unit Agreement Name  
**NATURAL BUTTES UNIT**

8. Farm or lease name, well no.  
**NATURAL BUTTES UNIT**

9. API Well No.  
**NBU 326-4E**

10. Field and pool, or wildcat  
**WASATCH**

11. Sec., T., R., M., or BLK. and survey or area  
**SEC. 4, T10S, R21E**

12. County or parish  
**UINTAH**

13. State  
**UTAH**

14. Distance in miles and direction from nearest town or post office  
**19.2 MILES SOUTHEAST OF OURAY, UTAH**

15. Distance from proposed location to nearest property or lease line, ft.  
**695'**

16. No. of acres in lease  
**649.36**

17. No. of acres assigned to this well  
**80**

18. Distance from proposed location to nearest well, drilling, completed, or applied for, on this lease, ft.

19. Proposed depth  
**6335'**

20. Rotary or cable tools  
**ROTARY**

21. Elevations (show whether DF, RT, GR, etc.)  
**4998 FEET GRADED GROUND**

22. Approx. date work will start  
**OCTOBER 2000**

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
11"	8 5/8"	24#	200' - 220'	100-150 SX CLASS "G" + 2%
or 12 1/4"	9 5/8"	32.30#	200 - 220'	CaCl2 + 1/4 #/SX CELLOFLAKE.
7 7/8"	4 1/2"	10.50#	6335'	50/50 POXMIX + 2% GEL + 10% SALT TO 400' ABOVE ALL ZONES OF INTEREST (+10% EXCESS). LIGHT CEMENT (11PPG+) + LCM TO 200' ABOVE OIL SHALE OR FRESH WATER INTERVALS (+ 5% EXCESS).

SEE ATTACHMENTS FOR:

- 8 POINT PLAN
- BOP SCHEMATIC
- SURFACE USE AND OPERATING PLAN
- LOCATION PLAT
- LOCATION LAYOUT
- TOPOGRAPHIC MAPS "A", "B", AND "C"
- GAS SALES PIPELINE—MAP "D"
- FACILITY DIAGRAM

**RECEIVED**  
**CONFIDENTIAL**  
 SEP 22 2000  
 DIVISION OF OIL, GAS AND MINING

EOG RESOURCES, INC. WILL BE THE DESIGNATED OPERATOR OF THE SUBJECT WELL UNDER NATION WIDE BOND #NM 2308

Pc: UTAH DIVISION OF OIL, GAS, AND MINING

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.


SIGNED [Signature] TITLE Agent DATE 8-28-2000

(This space for Federal or State office use)

PERMIT NO. 43-047-33697 APPROVAL DATE \_\_\_\_\_  
Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

CONDITIONS OF APPROVAL, IF ANY:  
APPROVED BY [Signature] TITLE BRADLEY G. HILL DATE 9/25/00  
Federal Approval of this Action is Necessary TITLE RECLAMATION SPECIALIST III

# T10S, R21E, S.L.B.&M.

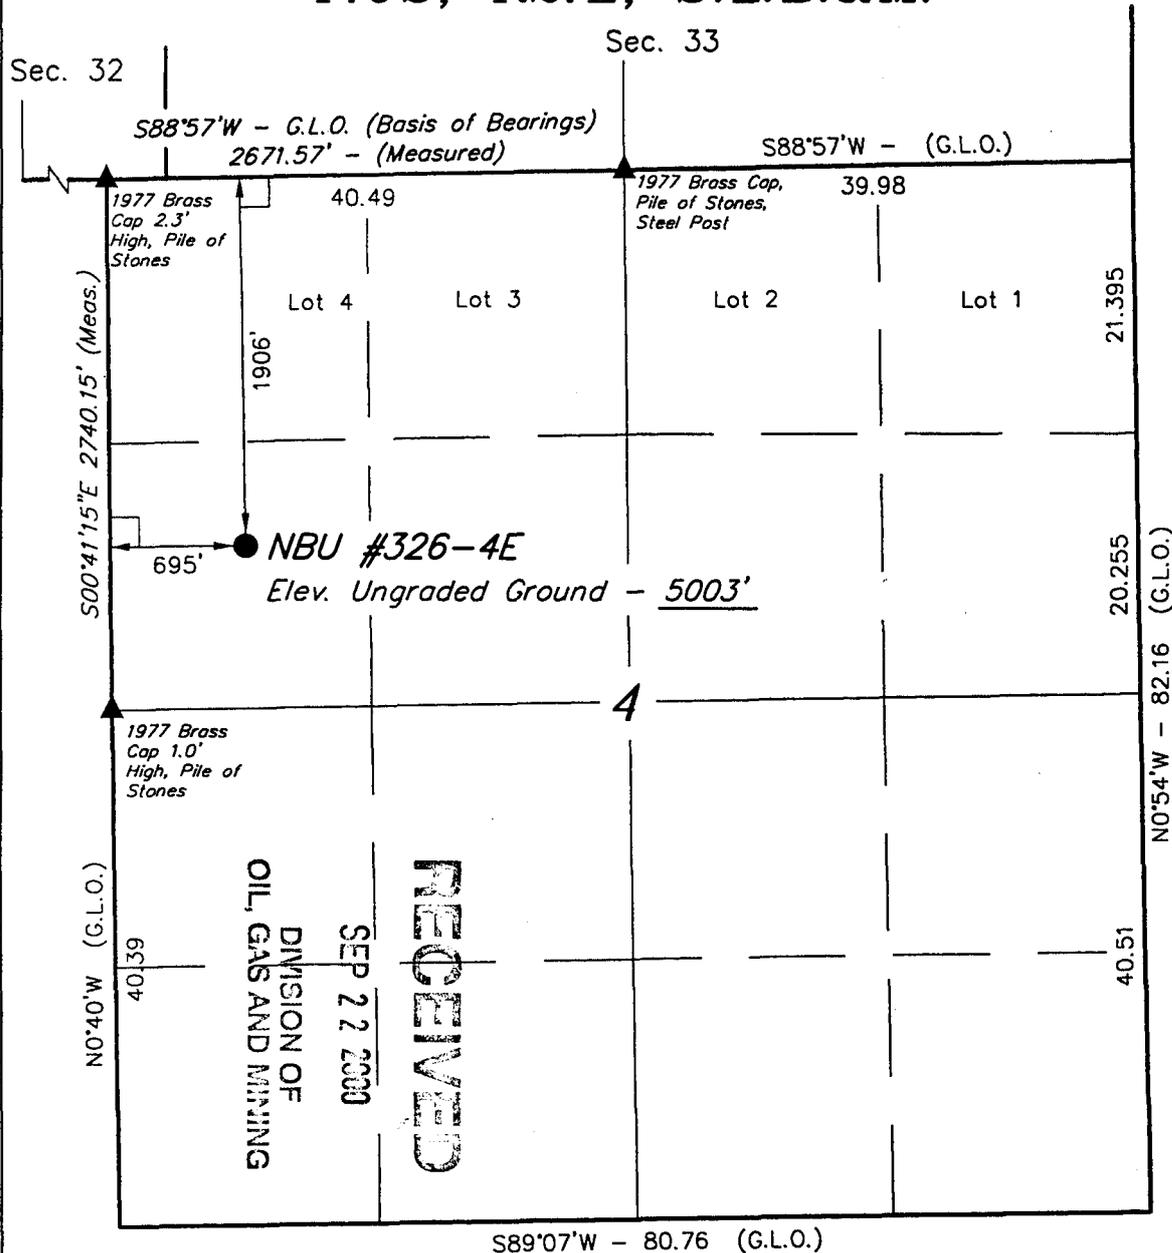


## EOG RESOURCES, INC.

Well location, NBU #326-4E, located as shown in the SW 1/4 NW 1/4 of Section 4, T10S, R21E, S.L.B.&M. Uintah County, Utah.

### BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN. NE QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.



### CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

*Robert L. Hay*  
REGISTERED LAND SURVEYOR  
REGISTRATION NO. 161319  
STATE OF UTAH

**UINTAH ENGINEERING & LAND SURVEYING**  
85 SOUTH 200 EAST - VERNAL, UTAH 84078  
(435) 789-1017

### LEGEND:

- = 90° SYMBOL
- = PROPOSED WELL HEAD.
- = SECTION CORNERS LOCATED.

LATITUDE = 39°58'44"  
LONGITUDE = 109°33'50"

SCALE 1" = 1000'	DATE SURVEYED: 6-26-00	DATE DRAWN: 7-14-00
PARTY G.S. T.A. D.COX	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE EOG RESOURCES, INC.	

**EIGHT POINT PLAN**

**NATURAL BUTTES UNIT #326-4E**

**SW/NW, SEC. 4, T10S, R21E**

**UINTAH COUNTY, UTAH**

**1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:**

<b>FORMATION</b>	<b>DEPTH</b>	<b>TYPE ZONES</b>	<b>MAXIMUM PRESSURE</b>
Green River	1405		
Oil Shale	1405		
"H" Marker	3025		
"J" Marker	3385		
Base "M" Marker	4315		
Wasatch	4705		
Peters Point	4705	GAS	
Chapita Wells	5415	GAS	
Buck Canyon	6150	GAS	

EST. TD 6335'

Anticipated BHP 2700 PSI

**3. PRESSURE CONTROL EQUIPMENT: BOP Schematic Diagram attached.**

**4. CASING PROGRAM:**

<b><u>HOLE SIZE</u></b>	<b><u>INTERVAL</u></b>	<b><u>LENGTH</u></b>	<b><u>SIZE</u></b>	<b><u>WEIGHT</u></b>	<b><u>GRADE</u></b>	<b><u>THREAD</u></b>	<b><u>MINIMUM SAFETY FACTOR</u></b>		
							<b><u>COLLAPSE</u></b>	<b><u>BURST</u></b>	<b><u>TENSILE</u></b>
11	0' - 220'	200' - 220'	8 5/8	24.0 #	J-55	ST&C	1370 PSI	2950 PSI	263,000#
or									
12 1/4	0' - 220'	200' - 220'	9 5/8	32.3 #	H-40	ST&C	1370 PSI	2270 PSI	254,000#
7 7/8	0' - 6335'	6335'	4 1/2	10.5 #	J-55	ST&C	4010 PSI	4790 PSI	146,000#

If conductor drive pipe is used, it will be left in place if its total length is less than 20 feet below the surface. If the total length of the drive pipe is equal to or greater than 20 feet, it will be pulled prior to cementing surface casing, or it will be cemented in place. The minimum diameter of the conductor drive pipe will be 13 3/8".

All casing will be new or inspected.

**RECEIVED**

**SEP 22 2000**

**DIVISION OF  
OIL, GAS AND MINING**

**EIGHT POINT PLAN**

**NATURAL BUTTES UNIT #326-4E**

**SW/NW, SEC. 4, T10S, R21E**

**UINTAH COUNTY, UTAH**

**5. MUD PROGRAM**

**INTERVAL**

0' - 220'  
240' - 4000'  
4000' - TD

**MUD TYPE**

Air  
Air/Mist & Aerated Water  
Air/3% KCL water or KCL substitute

Lost circulation probable from 1500' to 3000'+/-.

Sufficient mud inventory will be maintained on location during drilling to handle any adverse conditions that may arise.

**6. VARIANCE REQUESTS:**

- A. EOG Resources, Inc. requests a variance to regulations requiring a straight run blooie line (Where possible, a straight run blooie line will be used).
- B. EOG Resources, Inc. requests a variance to regulations requiring an automatic ignitor or continuous pilot light on the blooie line. (Not required on aerated water system).
- B. EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. To reduce location excavation, the blooie line will be 75' in length.

**7. EVALUATION PROGRAM:**

Logs: Schlumberger Platform Express

AIT-GR-SP-CAL  
FDC-CNL-GR-Cal-PE

T.D. to base of surface casing  
T.D. to 4200'

Cores: None Programmed  
DST: None Programmed

Completion: To be submitted at a later date.

Note: If hole conditions prevent the running of open hole logs, a cased hole Dipole Sonic/Neutron/Gr will be run in lieu of open hole logs.

**RECEIVED**

SEP 22 2000

DIVISION OF  
OIL, GAS AND MINING

**EIGHT POINT PLAN**

**NATURAL BUTTES UNIT #326-4E**  
**SW/NW, SEC. 4, T10S, R21E**  
**UINTAH COUNTY, UTAH**

**8. ABNORMAL CONDITIONS:**

None anticipated.

**9. STANDARD REQUIRED EQUIPMENT:**

- A. Choke Manifold
- B. Kelly Clock
- C. Stabbing Valve
- D. Visual Mud Monitoring

**10. HAZARDOUS CHEMICALS:**

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

(Attachment: BOP Schematic Diagram)

**RECEIVED**

**SEP 22 2000**



**DIVISION OF  
OIL, GAS AND MINING**

# 3000 PSIG DIAGRAM

ANNULAR PREVENTOR AND BOTH RAMS ARE 3000 RATED.  
 CASING FLANGE IS 11" 3000 PSIG RATED.  
 BOPE 11" 3000 PSIG

## TESTING PROCEDURE:

1. BOPE 's will be tested with a professional tester to conform to Onshore Order #2 with retest every 14 days.
2. Blind & Pipe rams will be tested to rated working pressure, 3000 psig
3. Annular preventor will be tested to 50% of working pressure, 1500 psig
4. Casing will be tested to 0.22 psi/ft. or 1500 psig. Not to exceed 70% of burst strength, whichever is greater.
5. All lines subject to well pressure will be pressure tested to the same pressure as blind & pipe rams.
6. All BOPE specifications and configurations will meet Onshore Order #2 requirements for 3000 psig BOPE specifications.

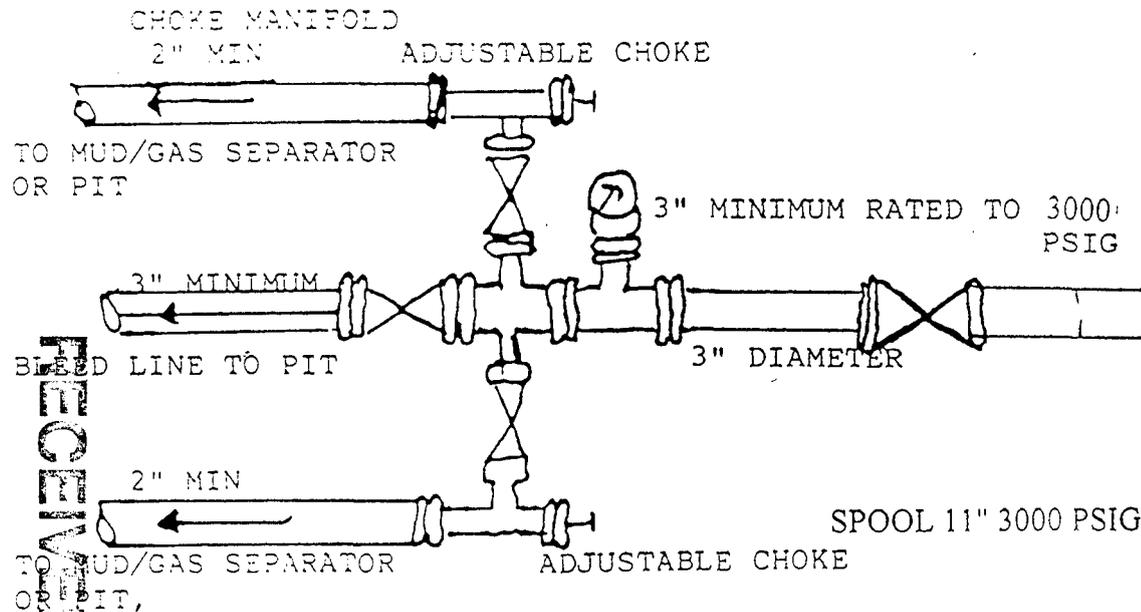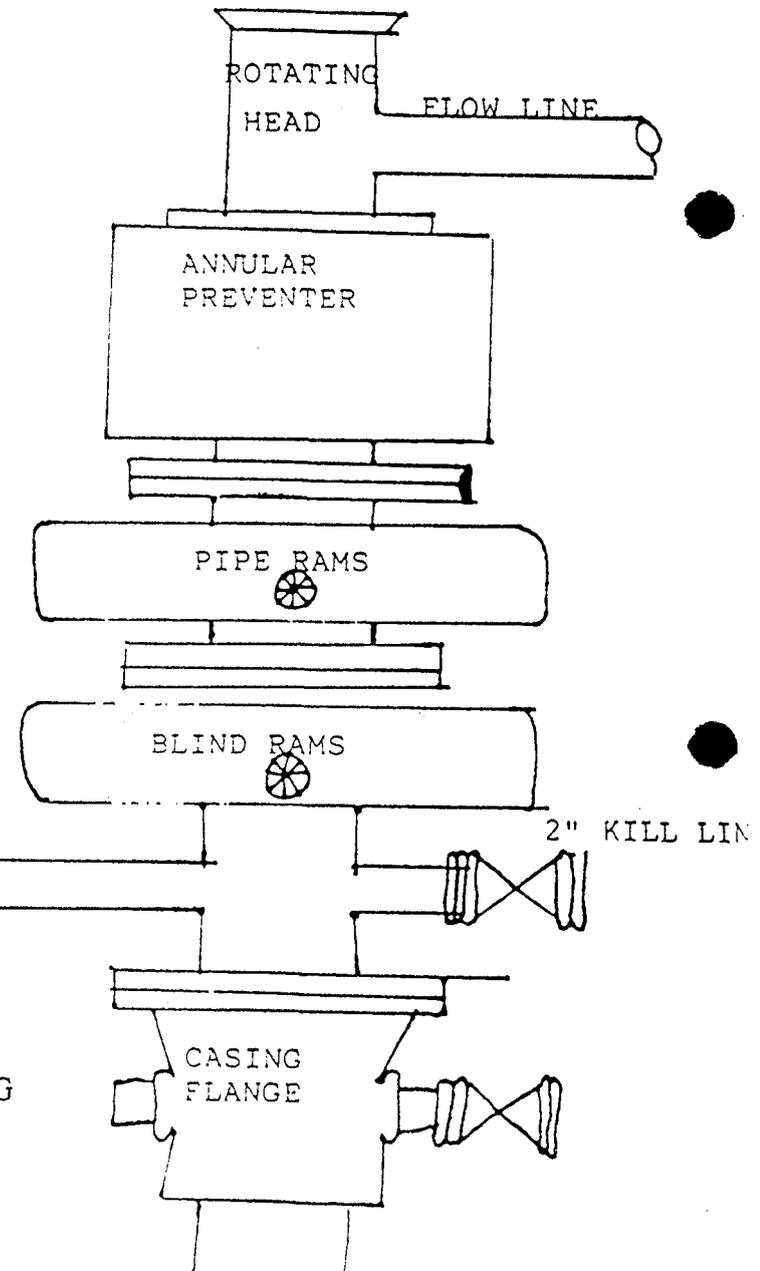

DIVISION OF OIL, GAS AND MINING

SEP 22 2000

RECEIVED

**CONDITIONS OF APPROVAL  
FOR THE SURFACE USE PROGRAM OF THE  
APPLICATION FOR PERMIT TO DRILL**

Company/Operator: EOG Resources, Inc.  
Well Name & Number: Nautral Buttes Unit #326-4E  
Lease Number: U-01393-B  
Location: 1906' FNL & 695' FWL, SW/NW, Sec. 4, T10S, R21E, S.L.B.&M.,  
Uintah County, Utah  
Surface Ownership: Federal

**NOTIFICATION REQUIREMENTS**

Location Construction - forty-eight (48) hours prior to construction of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice: - at least twenty-four (24) hours prior to spudding the well.

Casing String and Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.

BOP and related Equipment Tests - twenty-four (24) hours prior to running casing and tests.

First Production Notice well - within five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

**RECEIVED**

SEP 22 2000

DIVISION OF  
OIL, GAS AND MINING

## THIRTEEN POINT SURFACE USE PROGRAM

### 1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 19.2 miles southeast of Ouray, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

### 2. PLANNED ACCESS ROAD

- A. The access road will be approximately 0.3 miles in length. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/ 18 foot running surface.
- C. Maximum grade on access road will be 8%.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No culverts, bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of-Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

**RECEIVED**

SEP 22 2000

3. **LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION**

- A. Water wells - None
- B. Abandoned wells - 1\*
- C. Temporarily abandoned wells - None
- D. Disposal wells - None
- E. Drilling wells - None
- F. Producing wells - 11\*
- G. Shut in wells - None
- H. Injection wells - None

(\*See attached TOPO map "C" for location)

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

A. **ON WELL PAD**

- 1. Tank batteries - None
- 2. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of well head valves, combo separator-dehy unit with meter, 300 Bbl vertical or 200 Bbl low profile, condensate tank, and attaching piping. See attached facility diagram.
- 3. Oil gathering lines - None
- 4. Gas gathering lines - A 3" gathering line will be buried from dehy to the edge of the location.
- 5. Injection lines - None
- 6. Disposal lines - None
- 7. Surface pits - None

B. **OFF WELL PAD**

- 1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
- 2. A 3" OD steel above ground natural gas pipeline will be laid approximately 1700' from proposed location to a point in the NE/SW of Section 4, T10S, R21E, where it will tie into CIG's existing line. Proposed pipeline crosses Federal lands within the Natural Buttes Unit, thus a Right-of -Way grant will not be required.
- 3. Proposed pipeline will be a 3" OD steel, welded line laid on the surface.
- 4. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

**RECEIVED**

SEP 22 2000

DIVISION OF  
OIL, GAS AND MINING

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery.

The production facilities will be placed on the \_\_\_\_\_ side of the location.

**5. LOCATION & TYPE OF WATER SUPPLY**

- A. Water supply will be from Ouray Municipal Water Plant at Ouray, Utah, and/or Target Trucking Inc.'s water source in the SW/SW, Sec. 35, T9S, R22E, Uintah County, Utah (State Water Right #49-1501). Produced water from the Chapita Wells and Stagecoach Units will also be used.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

**6. SOURCE OF CONSTRUCTION MATERIAL**

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. All construction material will come from Federal Land.
- C. No mineral materials will be required.

**7. METHODS OF HANDLING WASTE DISPOSAL**

**A. METHODS AND LOCATION**

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at an approved waste disposal facility.
- 4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. During the 90 day period, an application for approval of a permanent disposal method and location, together with the required water analysis, will be submitted for the AO's approval.
- 5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.

- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore

**RECEIVED**

SEP 22 2000

DIVISION OF  
OIL, GAS AND MINING

hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

Burning of trash will not be allowed. All trash must be contained in a trash cage and hauled away to an approved disposal site at the completion of the drilling activities.

**On BLM administered land:**

The reserve pit will be constructed so as not to leak, break, or allow discharge.

**The reserve pit shall be lined.**

After first production, produced wastewater will be confined to a lined pit or storage tank for a period not to exceed ninety (90) days. During the 90 day period, in accordance with Onshore Order No. 7, an application for approval of a permanent disposal method and location, along with required water analysis, shall be submitted for the AO's approval. Failure to file an application within the time allowed will be considered an incident of noncompliance.

**8. ANCILLARY FACILITIES**

A. No airstrips or camps are planned for this well.

**9. WELLSITE LAYOUT**

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.
- D. **The approved seed mixture for this location can be found in the Conditions of Approval.**

The reserve pit will be located on the Northwest side of the location. The flare pit will be located downwind of the prevailing wind direction on the Northwest side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled pit topsoil will be stored separate from the location topsoil at corner five. The stockpiled location topsoil will be stored at the South corner and along the Southeast side of the location. Upon completion of construction, the stockpiled topsoil from the location will be broadcast seeded with the approved seed mixture for this location and then walked down with a cat.

RECEIVED

SEP 22 2000

DIVISION OF  
OIL, GAS AND MINING

Access to the well pad will be from the Southwest.

N/A Diversion ditch(es) shall be constructed on the \_\_\_\_\_ side of the location (above/below) the cut slope, draining to the \_\_\_\_\_.

N/A Soil compacted earthen berm(s) shall be placed on the \_\_\_\_\_ side(s) of the location between the \_\_\_\_\_.

N/A The drainage(s) shall be diverted around the sides of the well pad location.

N/A The reserve pit and/or pad locations shall be constructed long and narrow for topographic reasons \_\_\_\_\_.

Corners #6 & 8 will be rounded off to minimize excavation.

### FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BLM or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is to be regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently mounted on concrete bases. Prior to a new road, crossing any fence located on Federal land, or any fence between Federal land and private land, the operator will contact the BLM, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

RECEIVED

SEP 22 2000

**10. PLANS FOR RESTORATION OF SURFACE**

**A. PRODUCING LOCATION**

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The stockpiled pit topsoil will then be spread over the pit area and broadcast seeded with the prescribed seed mixture for this location. The seeded area will then be walked down with a cat.

**B. DRY HOLE/ABANDONED LOCATION**

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BLM will attach the appropriate surface rehabilitation conditions of approval.

**11. SURFACE OWNERSHIP**

Access road: Federal

Location: Federal

**12. OTHER INFORMATION**

A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:

-whether the materials appear eligible for the National Register of Historic Places;

-the mitigation measures the operator will likely have to undertake before the site can be used.

**RECEIVED**

SEP 22 2000

DIVISION OF  
OIL, GAS AND MINING

-a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

- B. As operator, EOG Resources, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BLM, or the appropriate County Extension Office. On BLM administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.
- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on BLM lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

**Additional Surface Stipulations**

N/A No construction or drilling activities shall be conducted between \_\_\_\_\_ and \_\_\_\_\_ because of \_\_\_\_\_.

N/A No surface occupancy will be allowed within 1,000 feet of any sage grouse strutting ground.

N/A No construction or exploration activities are permitted within a 1.5 mile radius of sage grouse strutting grounds from April 1 to June 30.

N/A There shall be no surface disturbance within 600 feet of live water (includes stock tanks, springs, and guzzlers).

N/A No cottonwood trees will be removed or damaged.

N/A Pond will be constructed according to BLM specifications approximately \_\_\_\_\_ feet \_\_\_\_\_ of the location, as flagged on the onsite.

RECEIVED

SEP 22 2003

DIVISION OF  
OIL, GAS AND MINING

**LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION**

**OPERATIONS**

EOG Resources, Inc.  
P.O. Box 250  
Big Piney, WY 83113  
Jim Schaefer  
Telephone (307)276-3331

EOG Resources, Inc.  
P.O. Box 1815  
Vernal, UT 84078  
George McBride  
Telephone (435)789-0790

**PERMITTING**

Ed Trotter  
P.O. Box 1910  
Vernal, UT 84078  
Telephone: (435)789-4120  
Fax: (435)789-1420

All lease or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. EOG Resources, Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.

**Certification**

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions that presently exist; that the statements made in the Plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this Plan and the terms and conditions under which it is approved.

8-28-2000

Date

Ed Trotter  
Agent

RECEIVED


SEP 22 2000

DIVISION OF  
OIL, GAS AND MINING

**SITE FACILITY DIAGRAM**  
**NATURAL BUTTES UNIT #326-4E**  
**SECTION 4, T10S, R21E, SW/4 NW/4**  
**UINTAH COUNTY, UTAH**

**FEDERAL LEASE NUMBER U-01393-B**

(Site Security Plan is on file at EOG Resources, Inc.'s Vernal Office)

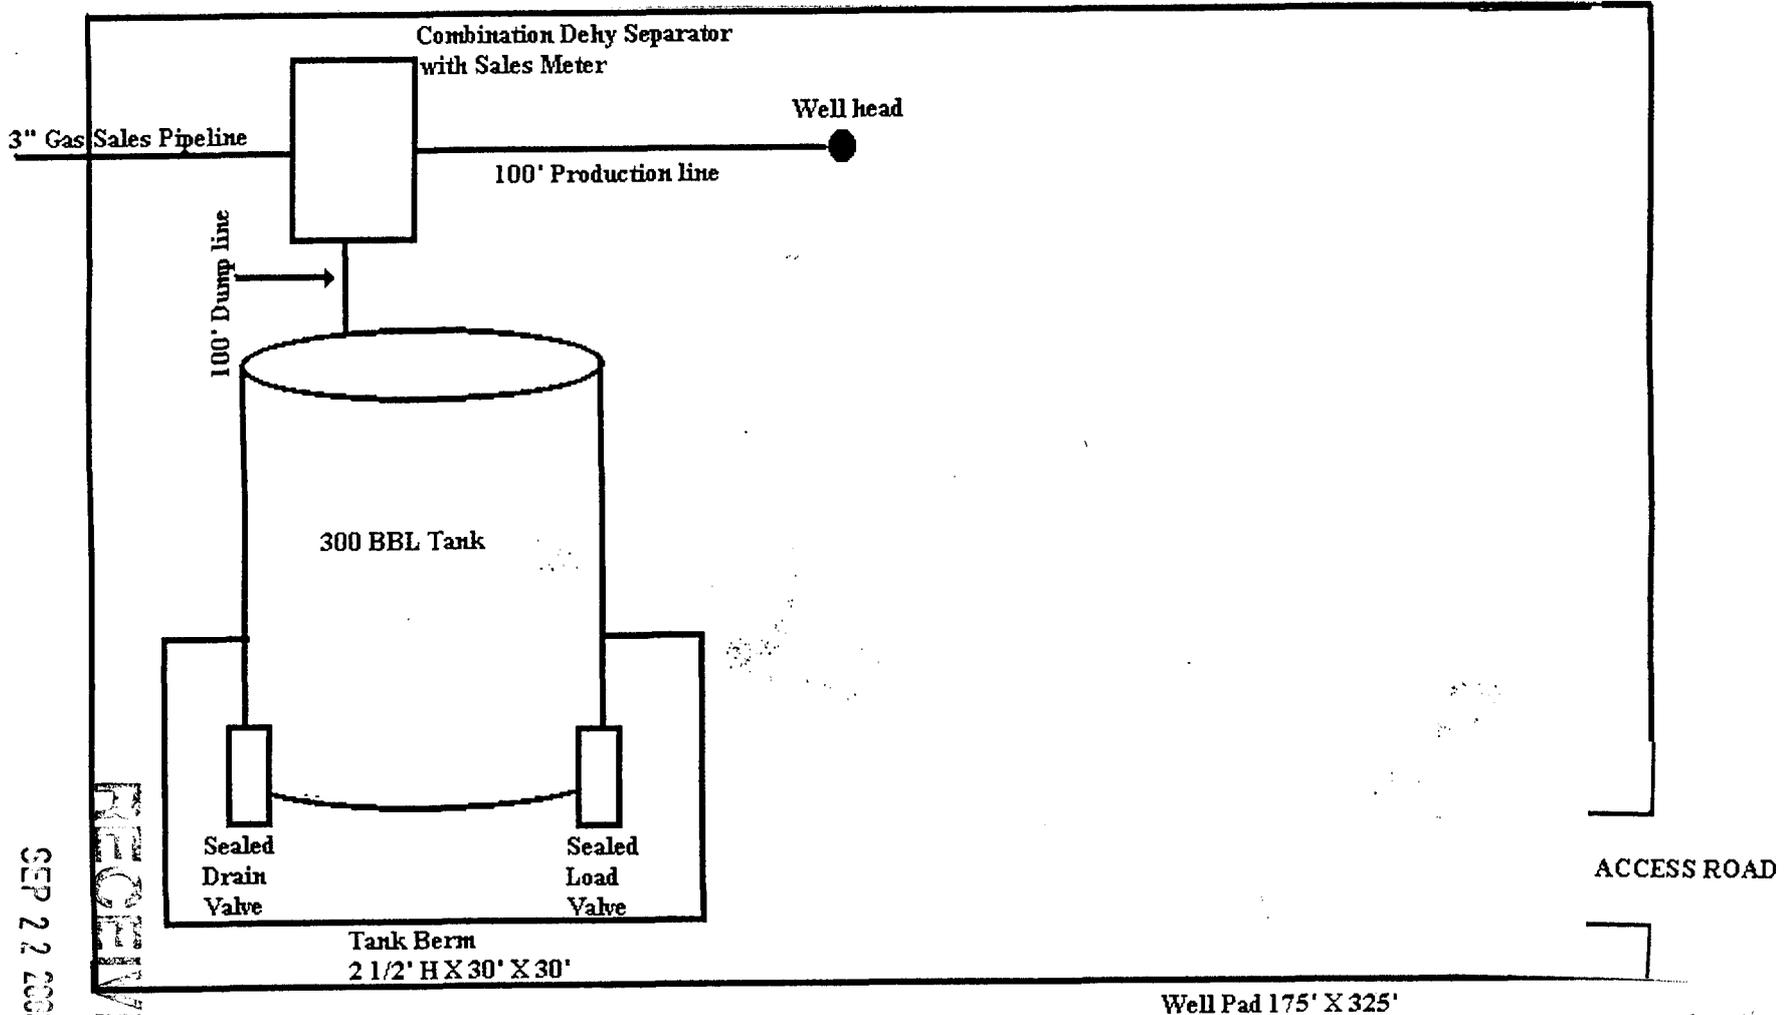

RECEIVED


SEP 22 2003

DIVISION OF  
OIL, GAS AND MINING

**EOG RESOURCES, INC.**



**LOCATION LAYOUT FOR**

**NBU #326-4E**  
**SECTION 4, T10S, R21E, S.L.B.&M.**  
**1906' FNL 695' FWL**



SCALE: 1" = 50'  
 DATE: 7-14-00  
 Drawn By: D.COX

**NOTE:**  
 Flare Pit is to be located a min. of 100' from the Well Head.

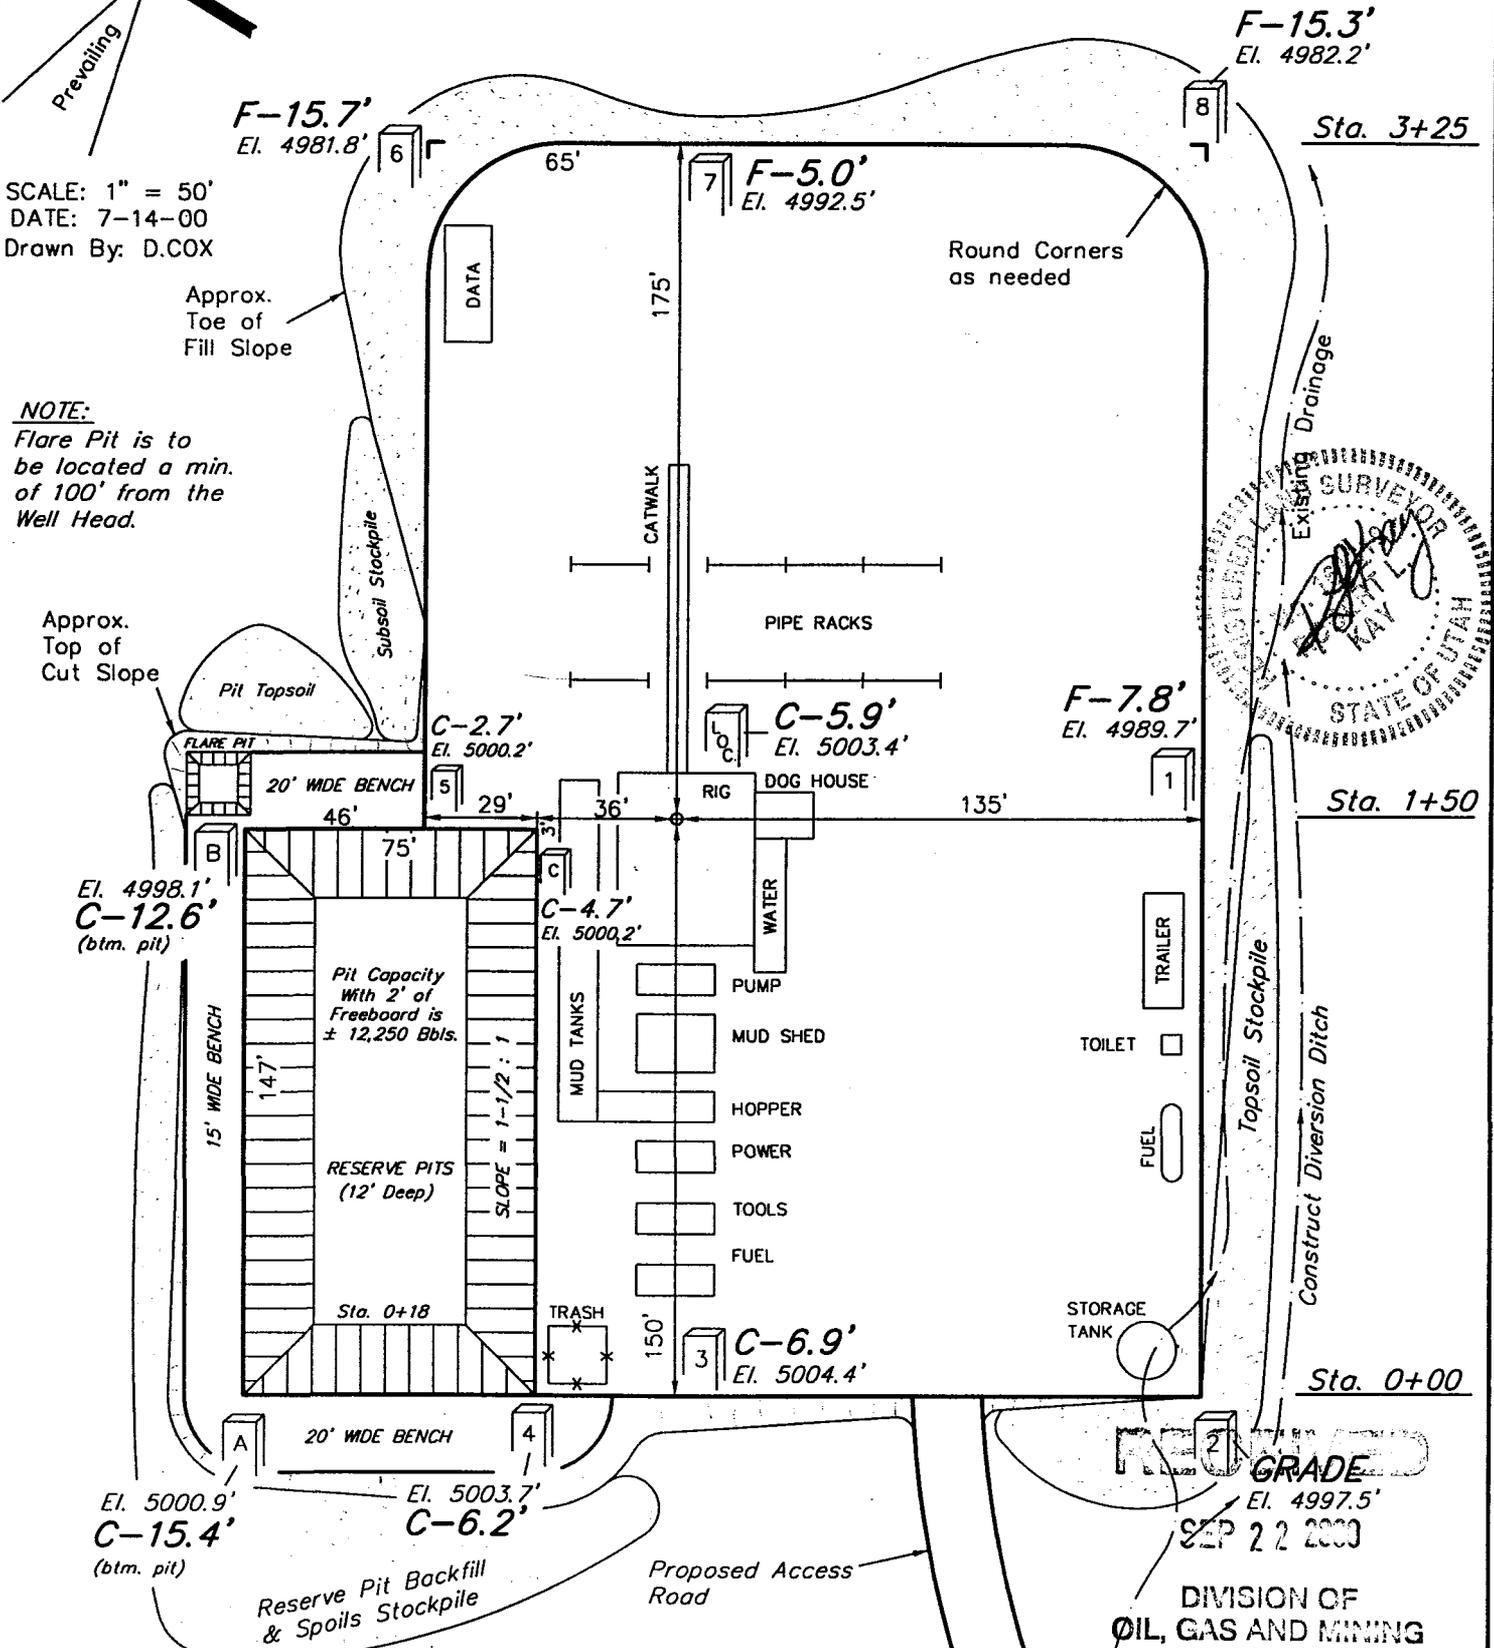

Elev. Ungraded Ground at Location Stake = 5003.4'  
 Elev. Graded Ground at Location Stake = 4997.5'

**UINTAH ENGINEERING & LAND SURVEYING**  
 85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

**EOG RESOURCES, INC.**

**TYPICAL CROSS SECTIONS FOR**






**NBU #326-4E**

**SECTION 4, T10S, R21E, S.L.B.&M.**

**1906' FNL 695' FWL**

1" = 20'  
X-Section Scale  
1" = 50'


DATE: 7-14-00  
Drawn By: D.COX

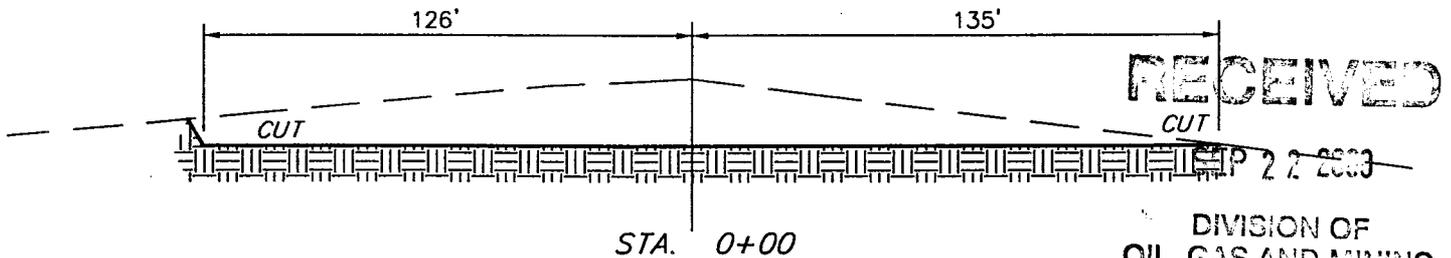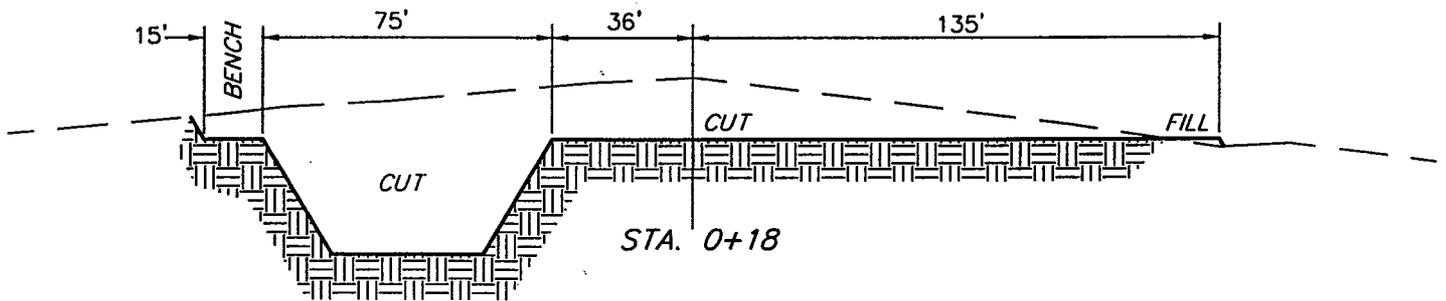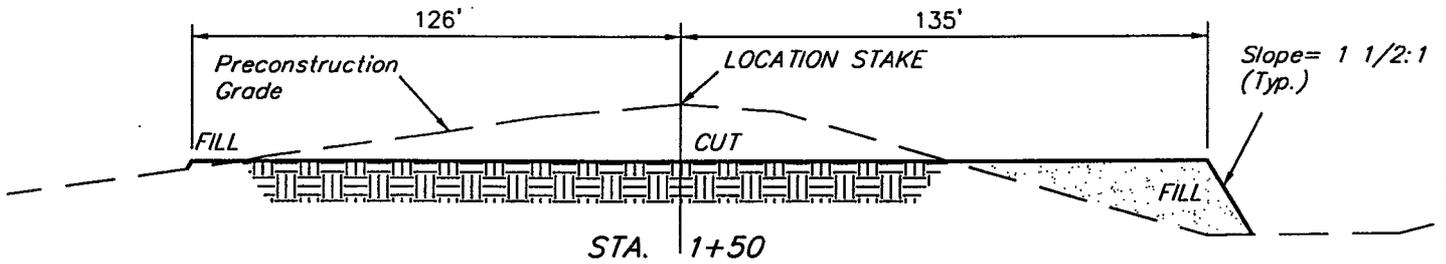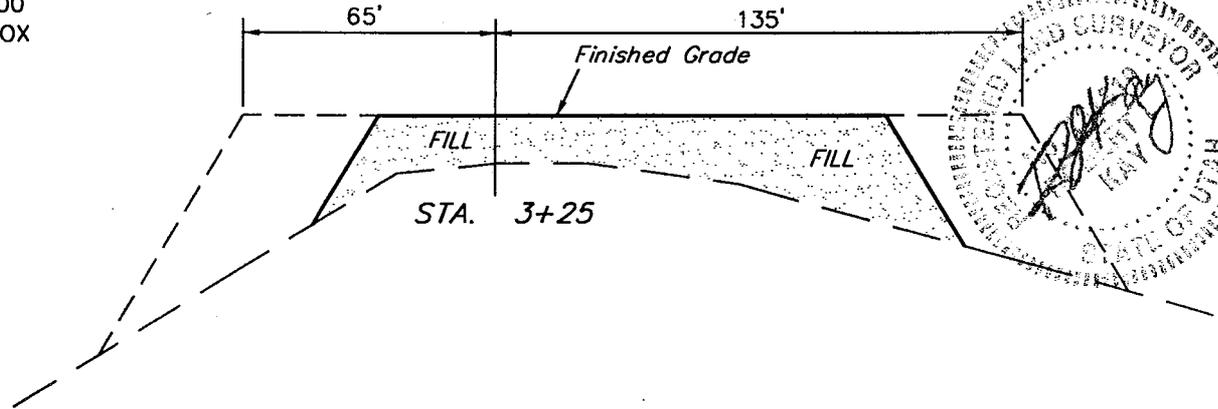

**APPROXIMATE YARDAGES**

(6") Topsoil Stripping	=	1,430 Cu. Yds.
Remaining Location	=	8,430 Cu. Yds.
<b>TOTAL CUT</b>	=	<b>9,860 CU.YDS.</b>
<b>FILL</b>	=	<b>6,430 CU.YDS.</b>

EXCESS MATERIAL AFTER 5% COMPACTION	=	3,090 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	=	3,090 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	=	0 Cu. Yds.

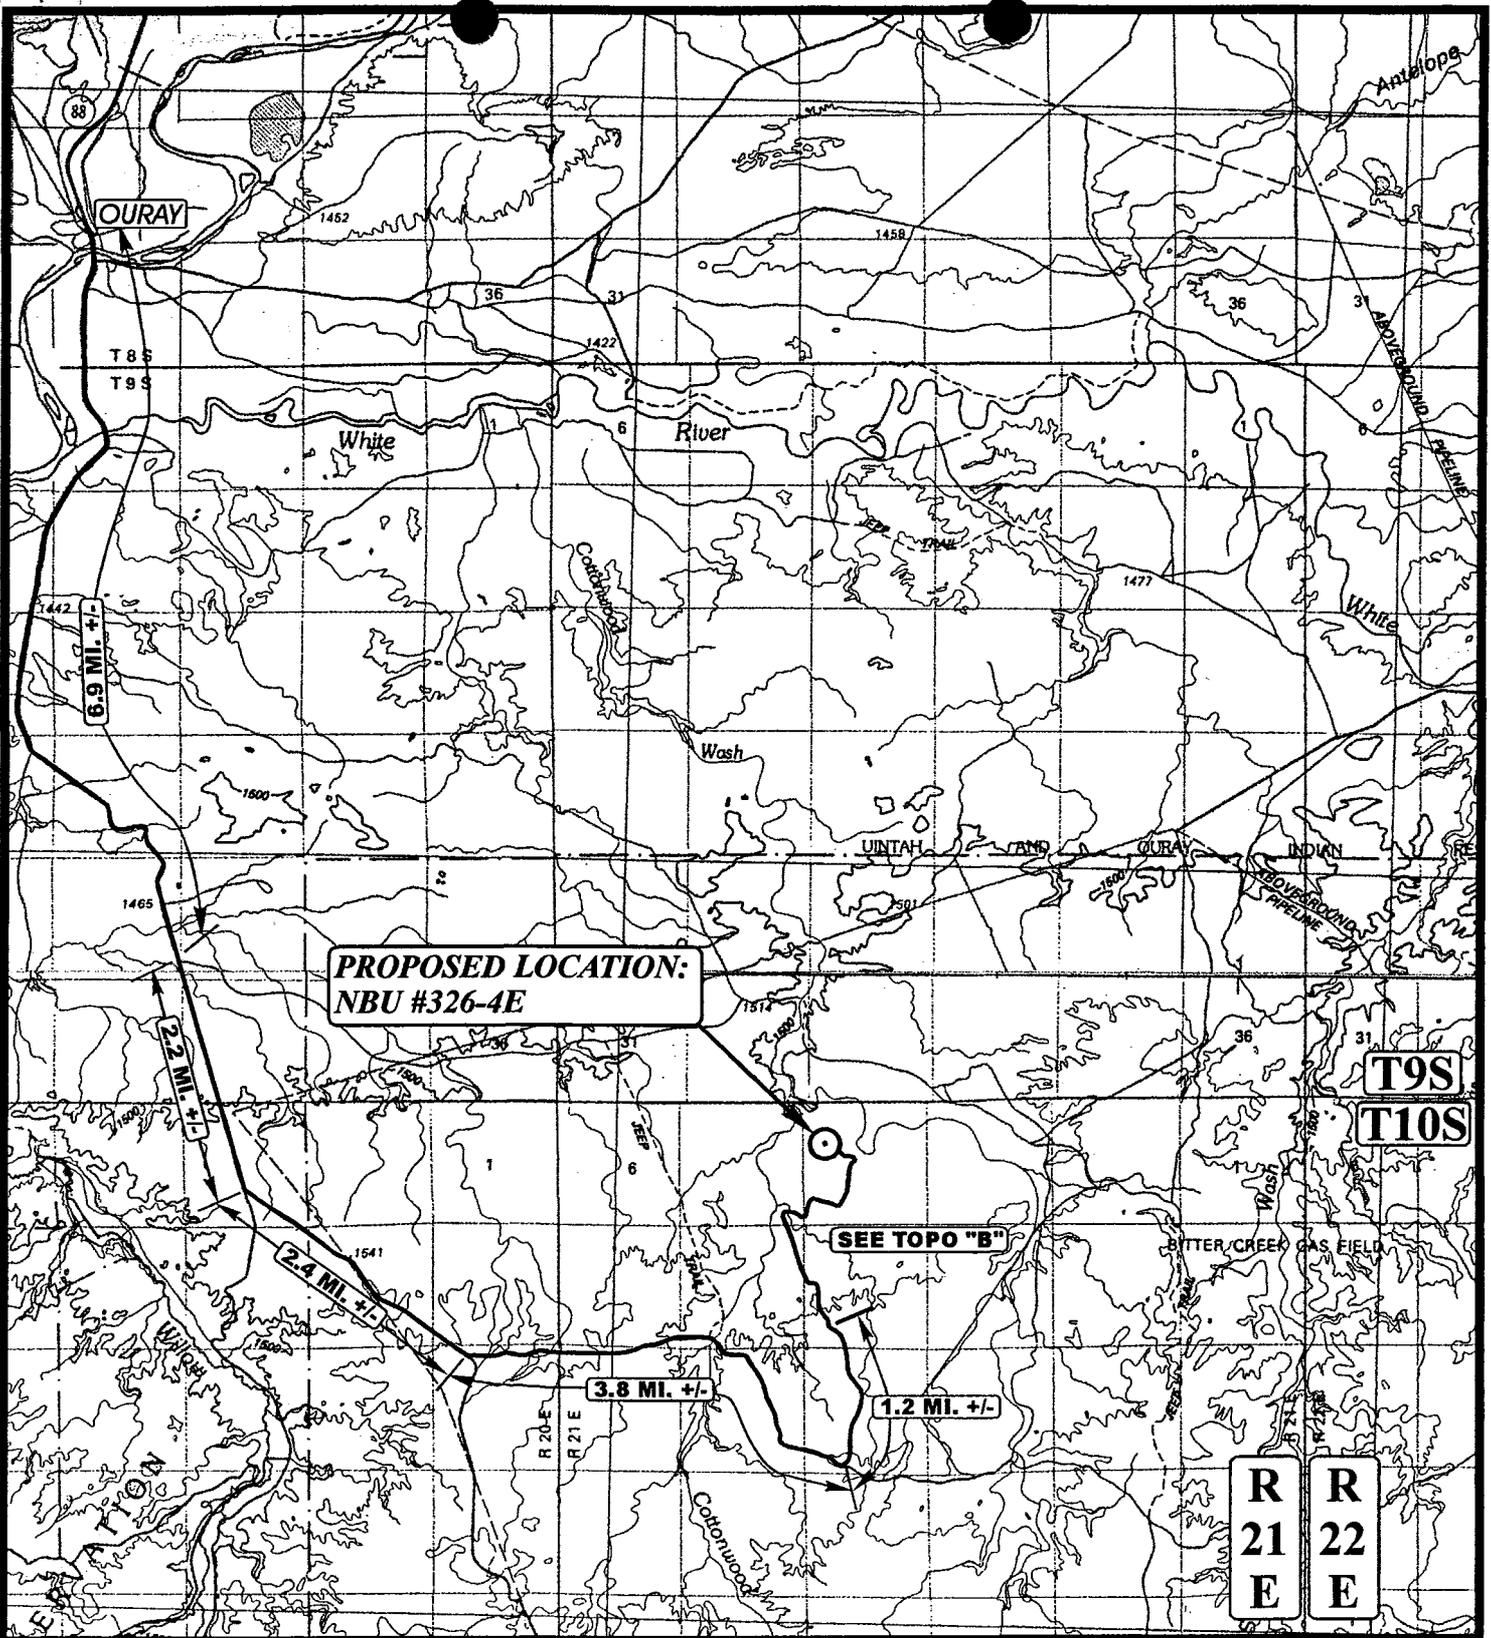

**LEGEND:**

○ PROPOSED LOCATION



**EOG RESOURCES, INC.**

**NBU #326-4E**  
**SECTION 4, T10S, R21E, S.L.B.&M.**  
**1906' FNL 695' FWL**




**Utah Engineering & Land Surveying**  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC**  
**MAP**

**7 10 00**  
 MONTH DAY YEAR

SCALE: 1:100,000 DRAWN BY: C.G. REVISED: 00-00-00



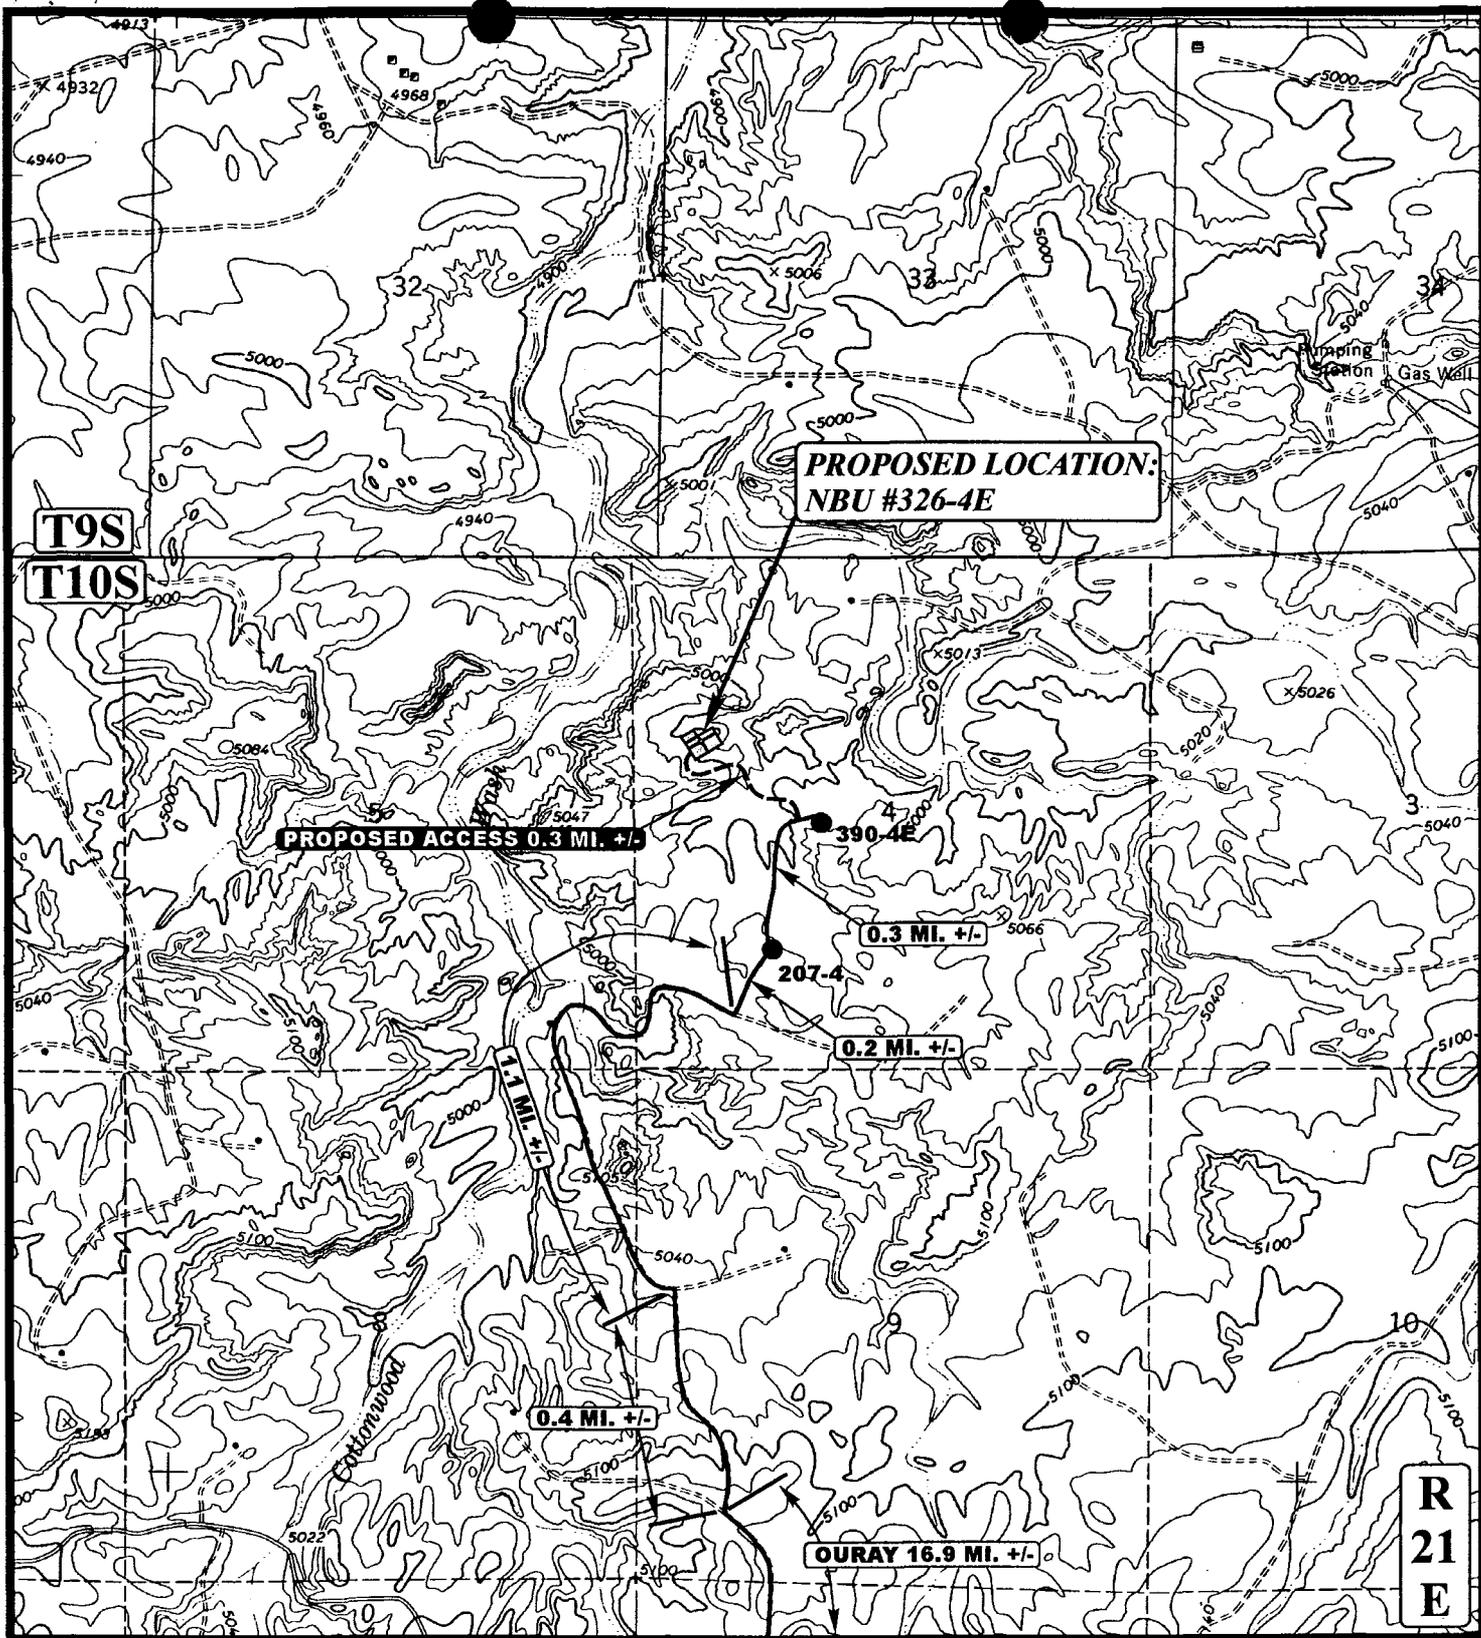

**LEGEND:**

- PROPOSED ACCESS ROAD
- EXISTING ROAD



**EOG RESOURCES, INC.**

**NBU #326-4E**  
**SECTION 4, T10S, R21E, S.L.B.&M.**  
**1906' FNL 695' FWL**




**Uintah Engineering & Land Surveying**  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC**  
**MAP**

<b>7</b>	<b>10</b>	<b>00</b>
MONTH	DAY	YEAR

SCALE: 1" = 2000' DRAWN BY: C.G. REVISED: 00-00-00



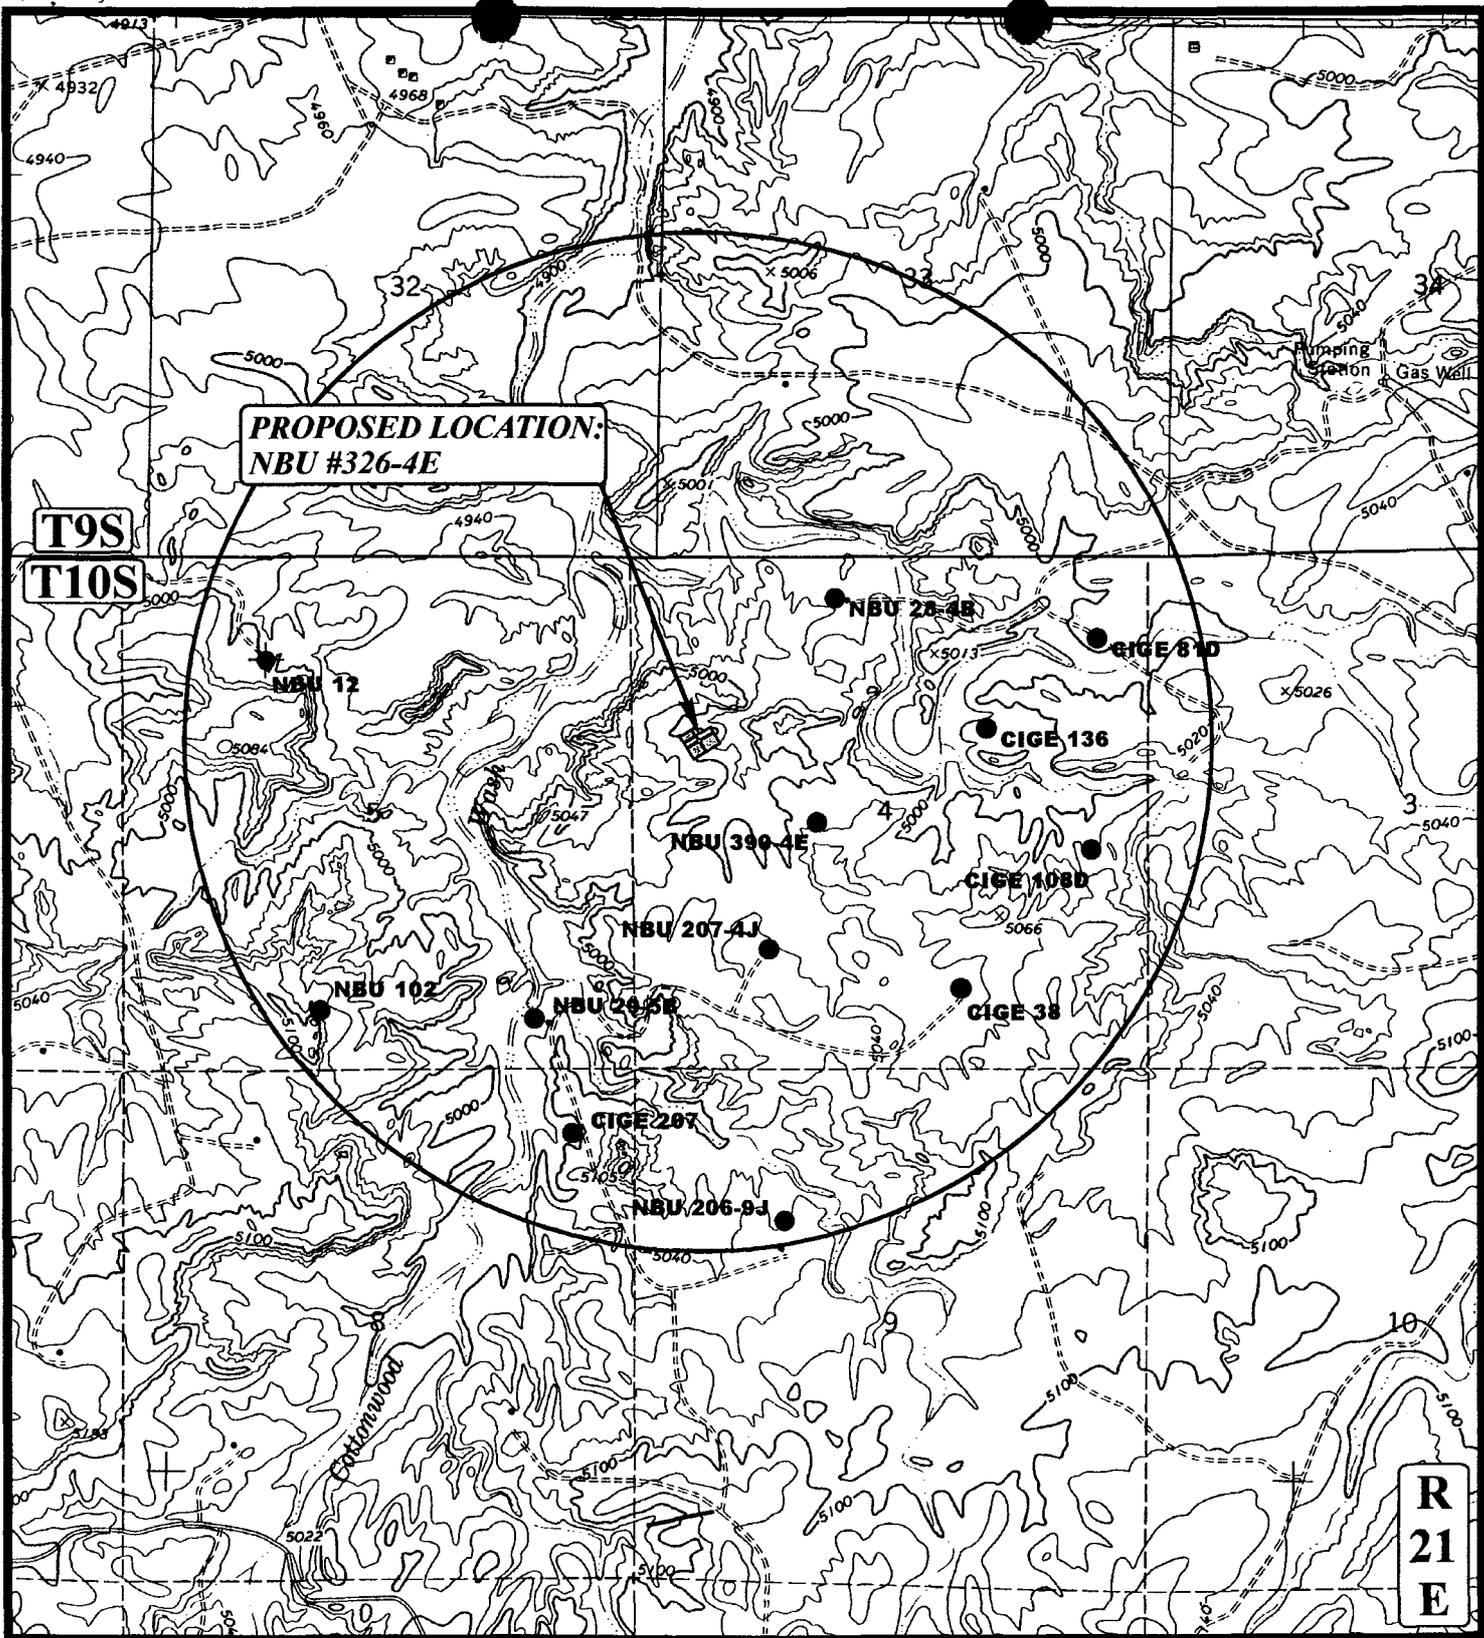

**PROPOSED LOCATION:  
NBU #326-4E**

**T9S**

**T10S**

**R  
21  
E**

**LEGEND:**

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ⊗ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED



**EOG RESOURCES, INC.**

**NBU #326-4E  
SECTION 4, T10S, R21E, S.L.B.&M.  
1906' FNL 695' FWL**




**Utah Engineering & Land Surveying**  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC  
MAP**

**7 10 00**  
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: C.G. REVISED: 00-00-00



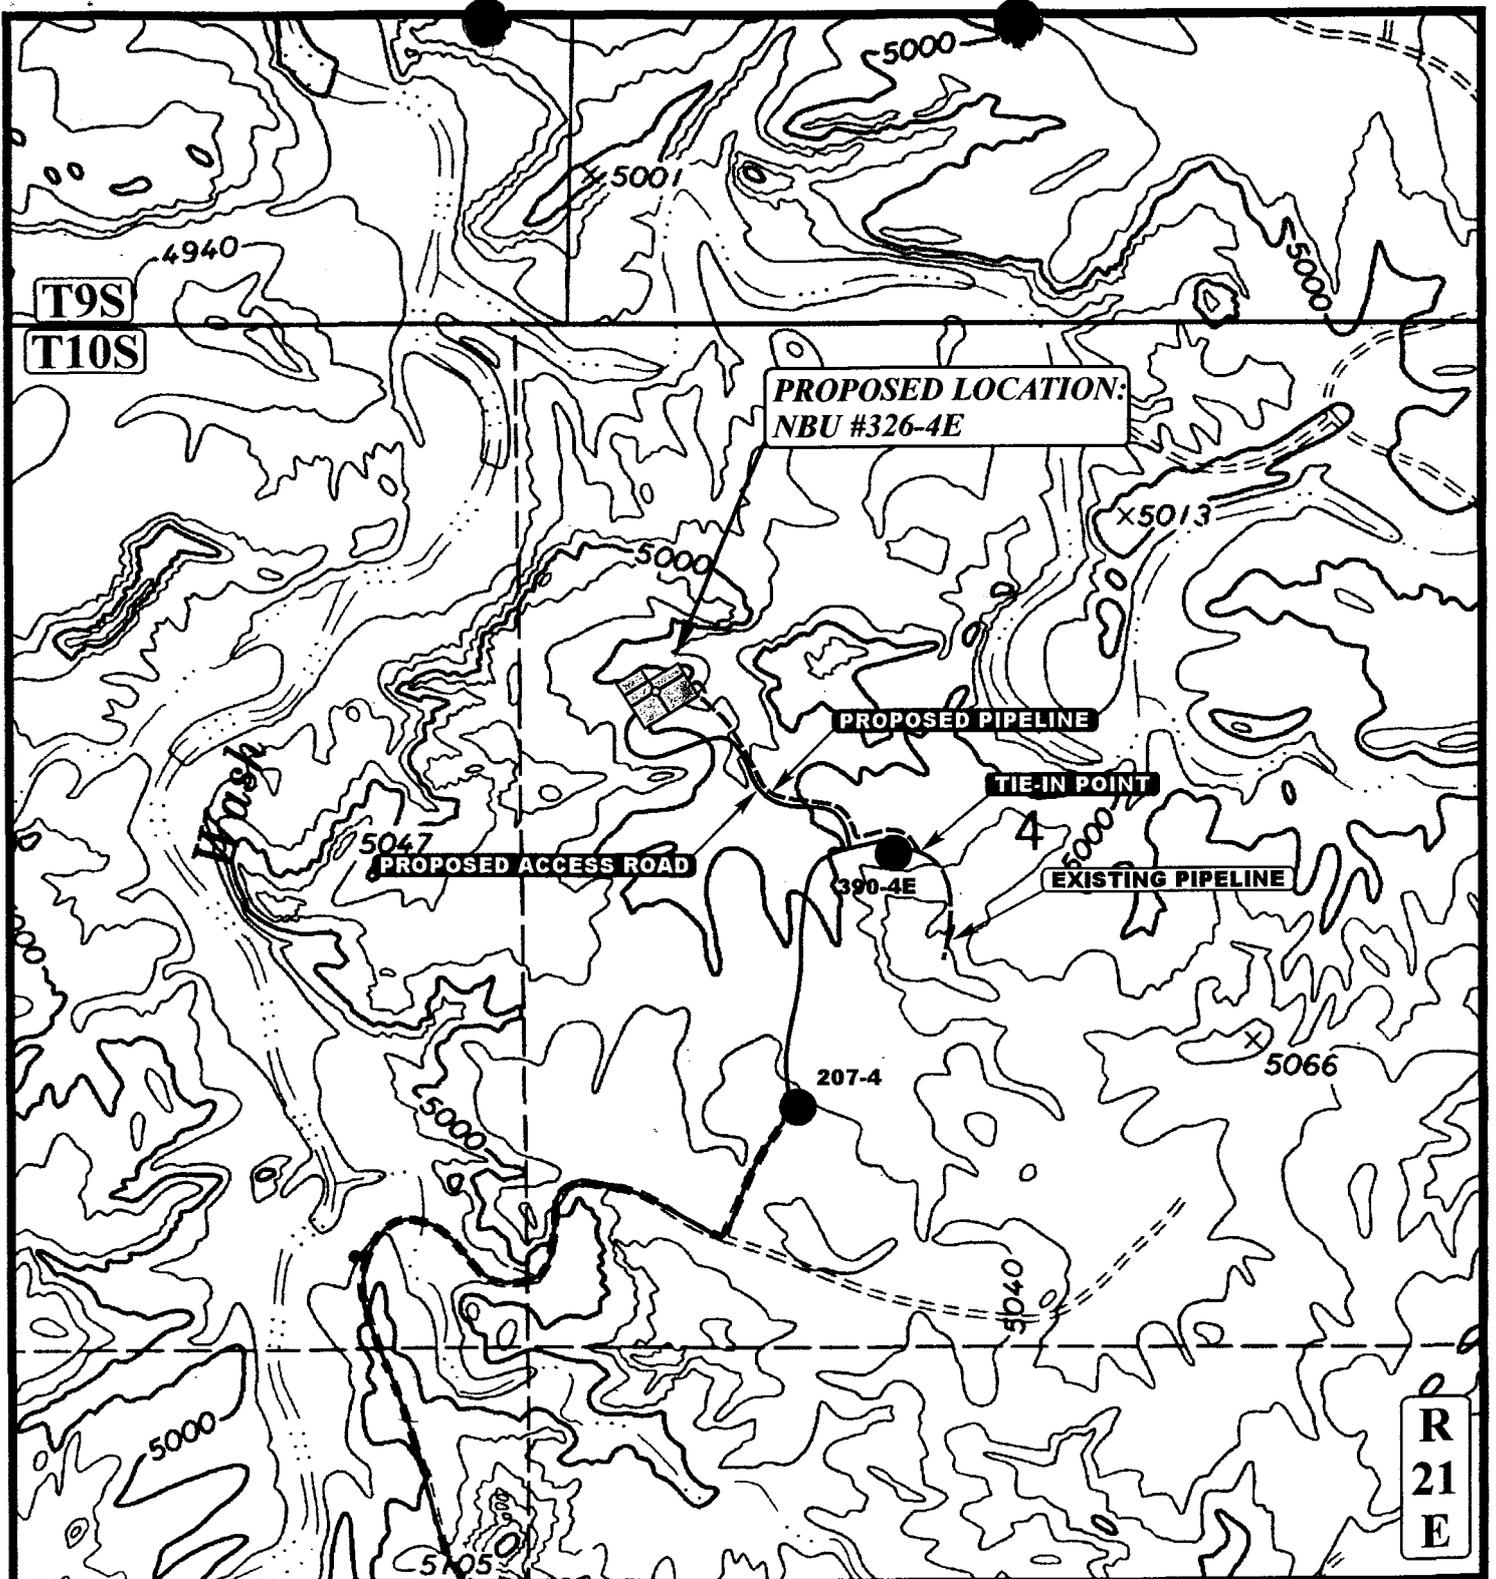

APPROXIMATE TOTAL PIPELINE DISTANCE = 1700' +/-

**LEGEND:**

- EXISTING PIPELINE
- PROPOSED PIPELINE
- PROPOSED ACCESS



**EOG RESOURCES, INC.**

NBU #326-4E  
SECTION 4, T10S, R21E, S.L.B.&M.  
1906' FNL 695' FWL



Utah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC  
MAP**

<b>7</b>	<b>19</b>	<b>00</b>
MONTH	DAY	YEAR

SCALE: 1"=1000' DRAWN BY: C.G. REVISED: 8-18-00

**D  
TOPO**

**WORKSHEET  
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 09/22/2000

API NO. ASSIGNED: 43-047-33697
--------------------------------

WELL NAME: NBU 326-4E  
 OPERATOR: EOG RESOURCES INC ( N9550 )  
 CONTACT: ED TROTTER, AGENT

PHONE NUMBER: 435-789-4120

PROPOSED LOCATION:  
 SWNW 04 100S 210E  
 SURFACE: 1906 FNL 0695 FWL  
 BOTTOM: 1906 FNL 0695 FWL  
 UINTAH  
 NATURAL BUTTES ( 630 )

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1-Federal  
 LEASE NUMBER: U-01393-B  
 SURFACE OWNER: 1-Federal

PROPOSED FORMATION: WSTC

RECEIVED AND/OR REVIEWED:

Plat  
 Bond: Fed[1] Ind[] Sta[] Fee[]  
 (No. NM 2308 )  
 Potash (Y/N)  
 Oil Shale (Y/N) \*190 - 5 (B)  
 Water Permit  
 (No. 49-1501 )  
 RDCC Review (Y/N)  
 (Date: \_\_\_\_\_ )  
 Fee Surf Agreement (Y/N)

LOCATION AND SITING:

R649-2-3. Unit Natural Buttes  
 R649-3-2. General  
 Siting: \_\_\_\_\_  
 R649-3-3. Exception  
 Drilling Unit  
 Board Cause No: 173-14  
 Eff Date: 12-2-99  
 Siting: 460' fr. Unit Boundary & Uncomm. Tract.  
 R649-3-11. Directional Drill

COMMENTS: NBU Desig. of Agent / EOG eff. 7-21-2000. (Pr. to Completion)

STIPULATIONS: ① FEDERAL APPROVAL  
② OIL SHALE



# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:  
3160  
(UT-922)

September 25, 2000

### Memorandum

To: Assistant District Manager Minerals, Vernal District  
From: Michael Coulthard, Petroleum Engineer  
Subject: 2000 Plan of Development Natural Buttes Unit  
Uintah County, Utah.

Pursuant to email between Lisha Cordova, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management. The following wells are planned for calendar year 2000 within the Natural Buttes Unit, Uintah County, Utah.

API #	WELL NAME	LOCATION
43-047-33696	NBU 516-12E	Sec. 12, T10S, R20E 1950 FSL 1786 FEL
43-047-33697	NBU 326-4E	Sec. 4, T10S, R21E 1906 FNL 0695 FWL
43-047-33698	NBU 422-29E	Sec. 29, T09S, R21E 1980 FNL 0785 FWL
43-047-33699	NBU 424-32E	Sec. 32, T09S, R21E 0744 FNL 0773 FEL
43-047-33701	NBU 525-12E	Sec. 12, T10S, R20E 0841 FSL 1795 FEL

This office has no objection to permitting the well(s) at this time.

/s/ Michael L. Coulthard

bcc: File - Natural Buttes  
Division of Oil Gas and Mining  
Agr. Sec. Chron  
Fluid Chron

MCoulthard:mc:9-25-0



State of Utah  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt  
Governor  
Kathleen Clarke  
Executive Director  
Lowell P. Braxton  
Division Director

1594 West North Temple, Suite 1210  
PO Box 145801  
Salt Lake City, Utah 84114-5801  
801-538-5340  
801-359-3940 (Fax)  
801-538-7223 (TDD)

September 25, 2000

EOG Resources, Inc.  
PO Box 1815  
Vernal, UT 84078


Re: Natural Buttes Unit 326-4E Well, 1906' FNL, 695' FWL, SW NW, Sec. 4, T. 10 South,  
R. 21 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-33697.

Sincerely,



John R. Baza  
Associate Director

er

Enclosures

cc: Uintah County Assessor  
Bureau of Land Management, Vernal District Office

**Operator:** EOG Resources, Inc.  
**Well Name & Number** Natural Buttes Unit 326-4E  
**API Number:** 43-047-33697  
**Lease:** U-01393-B

**Location:** SW NW      **Sec.** 4      **T.** 10 South      **R.** 21 East

### Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338
- Contact Robert Krueger at (801) 538-5274.

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

5. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.



CONDITIONS OF APPROVAL  
APPLICATION FOR PERMIT TO DRILL

Company/Operator: EOG Resources Inc.

Well Name & Number: NBU 326-4E

API Number: 43-047-33697

Lease Number: U - 01393-B

Location: SWNW Sec. 04 T. 10S R. 21E

Agreement: Natural Buttes Unit

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

[Faint, illegible text]

## CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

### A. DRILLING PROGRAM

#### 1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to Tim Ingwell of this office **prior to setting the next casing string or requesting plugging orders**. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

#### 2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a **3M** system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

If an air compressor is on location and is being utilized to provide air for the drilling medium while drilling, the special drilling requirements in Onshore Oil and Gas Order No. 2, regarding air or gas drilling shall be adhered to. If a mist system is being utilized then the requirement for a deduster shall be waived.

#### 3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint.

As a minimum, the usable water shall be isolated and/or protected by having a cement top for the production casing at least 200 ft. above the top of the Green River Formation, identified at 1,901 ft. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the AO. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vaporproof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the AO.

A cement bond log (CBL) will be run from the production casing shoe to top of the cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

03/20/04  
FILED  
03/20/04

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communication, not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5(d) shall be submitted to the appropriate Field Office within 60 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (1).

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling onlease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries and tested for meter accuracy at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal Field Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, contact one of the following individuals:

Ed Forsman (435) 789-7077  
Petroleum Engineer (435) 646-1685 (PAGER)

Jerry Kenczka (435) 781-1190  
Petroleum Engineer

BLM FAX Machine (435) 781-4410

## EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids.

**SURFACE USE PROGRAM**  
**Conditions of Approval (COAs)**

Plans For Reclamation Of Location

All seeding for reclamation operations at this location shall use the following seed mixture:

galleta grass	Hilaria jamesi	4 lbs/acre
gardner saltbush	Atriplex gardneri	4 lbs/acre
shadscale	Atriplex confertifolia	4 lbs/acre

If the seed mixture is to be aerially broadcasted, the pounds per acre shall be doubled. All seed poundages are in Pure Live Seed.

Immediately after construction the stockpiled topsoil will be seeded and the seed worked into the soil by "walking" the pile with caterpillar tracks.

For final abandonment, all topsoil shall be spread over the recontoured surface and the soils seeded.

RECEIVED  
10/10/00  
COLUMBIA RIVER

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	LOCATION				COUNTY	SPUD DATE	EFFECTIVE DATE
					QQ	SEC.	TP	RG			
B	99999	4905	43-047-33702	CHAPITA WELLS UNIT 601-16F	NWSW	16	9S	22E	UINTAH	11/14/2000	11-14-00
1 COMMENTS: 12-13-00 <b>CONFIDENTIAL</b> <i>Wasatch B-C-D-E</i>											
B	99999	4905	43-047-33633	CHAPITA WELLS UNIT 526-12F	NESW	12	9S	22E	UINTAH	11/12/2000	11-12-00
2 COMMENTS: 12-13-00 <b>CONFIDENTIAL</b> <i>Wasatch B-C-D-E</i>											
A	99999 <del>4905</del>	12981	43-047-33710	UTE TRIBAL 1-6E3	SENE	6	5S	3E	UINTAH	11/24/2000	11-24-00
3 COMMENTS: 12-13-00 <b>CONFIDENTIAL</b>											
A	99999	12982	43-047-33711	UTE TRIBAL 2-6E3	LOT 10	6	5S	3E	UINTAH	11/29/2000	11-29-00
4 COMMENTS: 12-13-00 <b>CONFIDENTIAL</b>											
B	99999	2900	43-047-33697	NATURAL BUTTES UNIT 326-4E	SWNW	4	10S	21E	UINTAH	10/05/2000	10-5-00
5 COMMENTS: 12-13-00 <b>CONFIDENTIAL</b>											

ACTIONS CODES (See instructions on back of form)

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

Signature \_\_\_\_\_  
 Regulatory Analyst 12/05/2000  
 Title \_\_\_\_\_ Date \_\_\_\_\_  
 Phone No. (307) 276-3331

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget No. 1004-0135  
Expires September 30, 1990

**CONFIDENTIAL**

**SUNDRY NOTICE AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT --" for such proposals  
**SUBMIT IN TRIPLICATE**

1. Type of Well

Oil  WELL Gas  Well  Other

2. Name of Operator  
**EOG Resources, Inc.**

3. Address and Telephone No.  
**P.O. BOX 250, BIG PINEY, WY 83113 (307) 276-3331**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**1906' FNL - 695' FWL (SW/NW)  
SECTION 4, T10S, R21E**

5. Lease Designation and Serial No.  
**U 01393 B**

6. If Indian, Allottee or Tribe Name

7. If Unit or C.A., Agreement Designation  
**NATURAL BUTTES UNIT**

8. Well Name and No.  
**NATURAL BUTTES UNIT 326-4E**

9. API Well No.  
**43-047-33697**

10. Field and Pool or Exploratory Area  
**NATURAL BUTTES/WASATCH**

11. County State  
**UNITAH, UTAH**

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> NOTICE OF INTENT	<input type="checkbox"/> ABANDONMENT
<input checked="" type="checkbox"/> SUBSEQUENT REPORT	<input type="checkbox"/> RECOMPLETION
<input type="checkbox"/> FINAL ABANDONMENT NOTICE	<input type="checkbox"/> PLUGGING BACK
	<input type="checkbox"/> CASING REPAIR
	<input type="checkbox"/> ALTERING CASING
	<input checked="" type="checkbox"/> OTHER
	<input type="checkbox"/> CHANGE OF PLANS
	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> NON-ROUTINE FRACTURING
	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> CONVERSION TO INJECTION

(Note: Report results of multiple completion on Well Completions or Recompletion Report and Log Form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details and give pertinent dates, including estimated date of starting any proposed work if well is directionally drilled give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work).

EOG Resources, Inc. spud 12-1/4" surface hole at the subject location 11/12/2000. The contractor was Dall Cook's Air Drilling. Ed Forsman of the Vernal BLM District office and Carol Daniels of the Utah Division of Oil, Gas & Mining were notified of spud 11/12/2000.

**RECEIVED**  
**DEC 15 2000**  
**DIVISION OF OIL, GAS AND MINING**

\*NOTE: EOG Resources, Inc. will be using Nationwide Bond #NM 2308

14. I hereby certify that the foregoing is true and correct

SIGNED *Doty Carls* TITLE **Regulatory Analyst** DATE **12/12/2000**

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**SUNDRY NOTICE AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT --" for such proposals  
**SUBMIT IN TRIPLICATE**

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires December 30, 1990

1. Type of Well  
 Oil Well     Gas Well     Other

2. Name of Operator  
**EOG Resources, Inc.**

3. Address and Telephone No.  
**P.O. BOX 250, BIG PINEY, WY 83113      (307) 276-3331**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**1906' FNL - 695' FWL (SW/NW)  
SECTION 4, T10S, R21E**

5. Lease Designation and Serial No.  
**U 01393 B**

6. If Indian, Allottee or Tribe Name

7. If Unit or C.A., Agreement Designation  
**NATURAL BUTTES UNIT**

8. Well Name and No.  
**NATURAL BUTTES UNIT 326-4E**

9. API Well No.  
**43-047-33697**

10. Field and Pool or Exploratory Area  
**NATURAL BUTTES/WASATCH**

11. County                      State  
**UNITAH,                      UTAH**

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> NOTICE OF INTENT	<input type="checkbox"/> ABANDONMENT
<input type="checkbox"/> SUBSEQUENT REPORT	<input type="checkbox"/> RECOMPLETION
<input type="checkbox"/> FINAL ABANDONMENT NOTICE	<input type="checkbox"/> PLUGGING BACK
	<input type="checkbox"/> CASING REPAIR
	<input type="checkbox"/> ALTERING CASING
	<input checked="" type="checkbox"/> OTHER
	<input type="checkbox"/> CHANGE OF PLANS
	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> NON-ROUTINE FRACTURING
	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> CONVERSION TO INJECTION
	<b>DISPOSAL OF PRODUCED WATER</b>

(Note: Report results of multiple completion on Well Completions or Recompletion Report and Log Form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details and give pertinent dates, including estimated date of starting any proposed work if well is directionally drilled give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work).

EOG Resources, Inc. requests authorization for disposal of produced water from the referenced well to any of the following locations:

1. Natural Buttes Unit 21-20B SWD
2. Ace Disposal
3. EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit)

**Accepted by the  
Utah Division of  
Oil, Gas and Mining  
FOR RECORD ONLY**

\*NOTE: EOG Resources, Inc. will be using Nationwide Bond #NM 2308

14. I hereby certify that the foregoing is true and correct

SIGNED *Doty Carbo*                      TITLE Regulatory Analyst                      DATE 12/13/2000

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:

**RECEIVED**

DEC 18 2000

**DIVISION OF  
OIL, GAS AND MINING**

**CONFIDENTIAL**

Expires August 31, 1985

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

5. LEASE DESIGNATION AND SERIAL NO.

U 01393 B

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

NATURAL BUTTES UNIT

8. FARM OR LEASE NAME

NATURAL BUTTES UNIT

WELL COMPLETION OR RECOMPLETION REPORT AND LOG\*

1a. TYPE OF WELL:

OIL WELL  GAS WELL  DRY  OTHER

b. TYPE OF COMPLETION:

NEW WELL  WORK OVER  DEEPEN  PLUG BACK  DIFF.RES.  OTHER

9. WELL NO.

326-4E

10. FIELD AND POOL, OR WILDCAT

NATURAL BUTTES/WASATCH

11. SEC., T., R., M., OR BLOCK AND SURVEY

2. NAME OF OPERATOR

EOG Resources, Inc.

SECTION 4, T10S, R21E

3. ADDRESS OF OPERATOR

P.O. BOX 250 BIG PINEY, WYOMING 83113

12. COUNTY OR PARISH

UNITAH,

13. STATE

UTAH

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)\*

At surface 1906' FNL - 695' FWL (SW/NW)  
At top prod. interval reported below SAME  
At total depth SAME

**CONFIDENTIAL**

14. PERMIT NO.

3-047-33697

DATE PERMIT ISSUED

9/25/2000

15. DATE SPUDDED

11/12/2000

16. DATE T.D. REACHED

11/26/2000

17. DATE COMPL. (Ready to prod.)

12/11/2000

18. ELEVATIONS (DF, RKB, RT, GR, ETC.)\*

5012' KB

19. ELEV. CASINGHEAD

4998' PREP. GL.

20. TOTAL DEPTH, MD & TVD

6235'

21. PLUG, BACK T.D., MD & TVD

6222'

22. IF MULTIPLE COMPLETIONS, HOW MANY?

1

23. ROTARY TOOLS

ROTARY

CABLE TOOLS

24. PRODUCING INTERVAL(S), OF THIS COMPLETION-TOP, BOTTOM, NAME (MD AND TVD)\*

WASATCH

5806' - 6062'

25. WAS DIRECTIONAL SURVEY MADE?

NO

26. TYPE ELECTRIC AND OTHER LOGS RUN

Dipole Sonic Imager, Compensated Neutron, GR, Dipole Sonic Imager, Compensated Neutron, Log Quality Control & Cement Bond Log, GR w/CCL. 4-7-00, ML-12-8-00

27. WAS WELL CORED?

NO

28.

CASING RECORD (Report all strings set in well)

CASING SIZE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
8-5/8"	24.0# J-55	243'	12-1/4"	125 sx Class "G" cement.	NONE
4-1/2"	10.5# J-55	6235'	7-7/8"	400 sx Hi-Lift & 500 sx 50/50 Pozmix.	NONE

29.

LINER RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT	SCREEN (MD)

30.

TUBING RECORD

SIZE	DEPTH SET (MD)	PACKER SET (MD)
2-3/8"	6068'	

31. PERFORATION RECORD (Interval, size and number)

Interval	Size	Number	SPF
Wasatch C-13 (Cm)	6027-31', 6039-43' & 6060-62'		w/3 SPF
C-13 (Ck)	5932-38' & 5944-50'		w/3 SPF
C-11 (Ch)	5806-10' & 5816-20'		w/3 SPF

32.

ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
6027-6062'	19,866 gals gelled water & 83,000# 20/40 sand.
5932-5950'	18,978 gals gelled water & 82,500# 20/40 sand.
5806-5820'	17,556 gals gelled water & 83,580# 20/40 sand.

33.\*

PRODUCTION

DATE FIRST PRODUCTION	PRODUCTION METHOD (Flowing, gas lift, pumping-size and type of pump)	WELL STATUS (Producing or shut-in)					
12/11/2000	FLOWING	PRODUCING					
DATE OF TEST	HOURS TESTED	CHOKER SIZE	PROD'N FOR	OIL-BBL.	GAS-MCF.	WATER-BBL.	GAS-OIL RATIO
12/12/00	24	14/64"		0 BC	451 MCFD	140 BW	
FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED	OIL-BBL.	GAS-MCF.	WATER-BBL.	OIL GRAVITY-API (CORR.)	
FTP 600 psig	CP 950 psig		0 BC	451 MCFD	140 BW		

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)

SOLD

TEST WITNESSED BY

JAY ORR

35. LIST OF ATTACHMENTS

**CONFIDENTIAL PERIOD**

36. I hereby certify that the foregoing and attached information is complete and correct as far as the operator is able to determine.

SIGNED

ON 1-11-02

TITLE

Regulatory Analyst

DATE 12/12/2000

\*(See Instructions and Spaces for Additional Data on Reverse Side)

**RECEIVED**

DEC 18 2000

DIVISION OF  
OIL, GAS AND MINING

# INSTRUCTIONS

**General:** This form is designed for submitting a complete and correct well completion report and log on all types of lands and leases to either a Federal agency or a State agency, or both, pursuant to applicable Federal and/or State laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office. See instructions on items 22 and 24, and 33, below regarding separate reports for separate completions.

**Item 4:** If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

**Item 18:** Indicate which elevation is used as reference (where not otherwise shown) for depth measurements given in other spaces on this form and in any attachments.

**Items 22 and 24:** If this well is completed for separate production from more than one interval zone (multiple completion), so state in item 22, and in item 24 show the producing interval, or intervals, top(s), bottom(s) and name(s) (if any) for only the interval reported in item 33. Submit a separate report (page) on this form, adequately identified, for each additional interval to be separately produced, showing the additional data pertinent to such interval.

**Item 29: ment:** Attached supplemental records for this well should show the details of any multiple stage cementing and the location of the cementing tool.

**Item 33:** Submit a separate completion report on this form for each interval to be separately produced. (See instruction for items 22 and 24 above.)

## PRIVACY ACT

The Privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by its application.

**AUTHORITY:** 30 U.S.C. 181 et. seq., 25 U.S.C. et. seq., 43 CFR 3160

**PRINCIPLE PURPOSE:** The information is to be used to evaluate the actual operations performed in the drilling of an oil or gas well on a Federal or Indian lease.

**ROUTINE USES:** (1) Evaluate the equipment and procedures used during the drilling of the well. (2) The review of geologic zones and formation encountered during drilling. (3) Analyze future applications to drill in light of data obtained and methods used. (4)(5) Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions.

**EFFECT OF NOT PROVIDING INFORMATION:** Filing of this report and disclosure of its information is mandatory once an oil or gas well is drilled.

The Paperwork Reduction Act of 1980 (44 U.S.C. 3501, et. seq.) requires us to inform you that:

This information is being collected to allow evaluation of the technical, safety, and environmental factors involved with drilling and producing oil and gas on Federal and Indian oil and gas leases.

This information will be used to analyze operations and compare equipment and procedures actually used with the proposals applied for.

Response to this request is mandatory once an oil or gas well is drilled.

SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; core intervals; and all annu-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries):				38. GEOLOGIC MARKERS		
FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	TOP		
				NAME	MEAS. DEPTH	TRUE VERT. DEPTH
				Green River	1500'	
				Baxe "M" Marker	4285'	
				"N" Limestone	4587'	
				Wasatch		
				Peter's Point	4703'	
				P-2 (Pa)	4777'	
				P-4 (Pb)	4845'	
				P-4 (Pc)	4913'	
				P-8 (Pf)	5194'	
				P-8 (Pg)	5219'	
				Chapita Wells	5426'	
				C-7 (Cc)	5567'	
				C-9 (Ce)	5660'	
				C-9 (Cf)	5732'	
				C-11 (Ch)	5805'	
				C-13 (Ck)	5928'	
				C-13 (Cm)	6026'	
				Buck Canyon	6133'	



STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:  
6. IF INDIAN, ALLOTTEE OR TRIBE NAME:  
7. UNIT or CA AGREEMENT NAME:  
8. WELL NAME and NUMBER:  
Exhibit "A"  
9. API NUMBER:  
10. FIELD AND POOL, OR WILDCAT:

1. TYPE OF WELL: OIL WELL  GAS WELL  OTHER \_\_\_\_\_  
2. NAME OF OPERATOR:  
El Paso Production Oil & Gas Company  
3. ADDRESS OF OPERATOR:  
8 South 1200 East CITY Vernal STATE Utah ZIP 84078 PHONE NUMBER: 435-789-4433

4. LOCATION OF WELL  
FOOTAGES AT SURFACE: \_\_\_\_\_ COUNTY: \_\_\_\_\_  
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: \_\_\_\_\_ STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Name Change</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.  
As a result of the merger between The Coastal Corporation and a wholly owned subsidiary of El Paso Energy Corporation, the name of Coastal Oil & Gas Corporation has been changed to El Paso Production Oil & Gas Company effective March 9, 2001.  
See Exhibit "A"

Bond # 400JU0708

Coastal Oil & Gas Corporation  
NAME (PLEASE PRINT) John T. Elzner TITLE Vice President  
SIGNATURE [Signature] DATE 06-15-01  
El Paso Production Oil & Gas Company  
NAME (PLEASE PRINT) John T. Elzner TITLE Vice President  
SIGNATURE [Signature] DATE 06-15-01

(This space for State use only)

**RECEIVED**  
JUN 19 2001  
DIVISION OF  
OIL, GAS AND MINING

State of Delaware  
Office of the Secretary of State

---

PAGE 1

I, HARRIET SMITH WINDSOR, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF AMENDMENT OF "COASTAL OIL & GAS CORPORATION", CHANGING ITS NAME FROM "COASTAL OIL & GAS CORPORATION" TO "EL PASO PRODUCTION OIL & GAS COMPANY", FILED IN THIS OFFICE ON THE NINTH DAY OF MARCH, A.D. 2001, AT 11 O'CLOCK A.M.

RECEIVED

(JUN 14 2001)

DIVISION OF  
OIL, GAS AND MINING



*Harriet Smith Windsor*  
Harriet Smith Windsor, Secretary of State

0610204 8100

AUTHENTICATION: 1061007

010162788

DATE: 04-03-01

CERTIFICATE OF AMENDMENT  
OF  
CERTIFICATE OF INCORPORATION

COASTAL OIL & GAS CORPORATION (the "Company"), a corporation organized and existing under and by virtue of the General Corporation Law of the State of Delaware, DOES HEREBY CERTIFY:

FIRST: That the Board of Directors of the Company, by the unanimous written consent of its members, filed with the minutes of the Board, adopted a resolution proposing and declaring advisable the following amendment to the Certificate of Incorporation of the Company:

RESOLVED that it is deemed advisable that the Certificate of Incorporation of this Company be amended, and that said Certificate of Incorporation be so amended, by changing the Article thereof numbered "FIRST," so that, as amended, said Article shall be and read as follows:

"FIRST. The name of the corporation is El Paso Production Oil & Gas Company."

SECOND: That in lieu of a meeting and vote of stockholders, the stockholders entitled to vote have given unanimous written consent to said amendment in accordance with the provisions of Section 228 of the General Corporation Law of the State of Delaware.

THIRD: That the aforesaid amendment was duly adopted in accordance with the applicable provisions of Sections 242 and 228 of the General Corporation Law of the State of Delaware.

IN WITNESS WHEREOF, said COASTAL OIL & GAS CORPORATION has caused this certificate to be signed on its behalf by a Vice President and attested by an Assistant Secretary, this 9th day of March 2001.

COASTAL OIL & GAS CORPORATION

  
\_\_\_\_\_  
David L. Siddall  
Vice President

Attest:

  
\_\_\_\_\_  
Margaret E. Roark, Assistant Secretary

RECEIVED

STATE OF DELAWARE  
SECRETARY OF STATE  
DIVISION OF CORPORATIONS  
FILED 11:00 AM 03/09/2001  
010118394 - 0610204

JUN 19 2001

DIVISION OF  
OIL, GAS AND MINING



# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155

# RECEIVED

JUL 12 2001

DIVISION OF  
OIL, GAS AND MINING

In Reply Refer To:  
3106  
UTSL-065841  
(UT-924)

JUL 10 2001

### NOTICE

El Paso Production Oil & Gas Company : Oil and Gas  
Nine Greenway Plaza :  
Houston TX 77046-0095 :

#### Name Change Recognized

Acceptable evidence has been received in this office concerning the name change of Coastal Oil & Gas Corporation into El Paso Production Oil & Gas Company with El Paso Production Oil & Gas Company being the surviving entity.

For our purposes, the name change is recognized effective March 9, 2001.

The oil and gas lease files identified on the enclosed exhibit have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Coastal Oil & Gas Corporation to El Paso Production Oil & Gas Company. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Wyoming and Colorado.



Opolonia L. Abeyta  
Acting Chief, Branch of  
Minerals Adjudication

Enclosure

1. Exhibit of Leases (1 pp)

cc: Moab Field Office  
Vernal Field Office  
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217  
~~State of Utah, DOGM~~, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114  
Teresa Thompson (UT-922)  
Joe Incardine (UT-921)

## Exhibit of Leases

UTUSL-065841A	UTU-47172	UTU-74415	UTU-53860
UTU-28652	UTU-50687	UTU-74416	UTU-66401
UTU-37943	UTU-52298	UTU-75091	UTU-67868
UTU-44089	UTU-0109054	UTU-75096	UTU-65389
UTU-44090A	UTU-0143511	UTU-75097	UTU-77084
UTU-61263	UTU-0143512	UTU-75673	UTU-61430
UTU-00343	UTU-38401	UTU-76259	UTU-72633
UTU-02651	UTU-38411	UTU-76260	UTU-72650
UTU-02651B	UTU-38418	UTU-76261	UTU-49692
UTU-0142175	UTU-38419	UTU-76493	UTU-57894
UTU-70235	UTU-38420	UTU-76495	UTU-76829
UTU-70406	UTU-38421	UTU-76503	UTU-76830
UTU-74954	UTU-38423	UTU-78228	UTU-76831
UTU-75132	UTU-38424	UTU-78714	
UTU-75699	UTU-38425	UTU-78727	
UTU-76242	UTU-38426	UTU-78734	
UTU-78032	UTU-38427	UTU-79012	
UTU-4377	UTU-38428	UTU-79011	
UTU-4378	UTU-53861	UTU-71694	
UTU-7386	UTU-58097	UTU-00576	
UTU-8344A	UTU-64376	UTU-00647	
UTU-8345	UTU-65222	UTU-01470D	
UTU-8347	UTU-65223	UTU-0136484	
UTU-8621	UTU-66746	UTU-8344	
UTU-14646	UTU-67178	UTU-8346	
UTU-15855	UTU-67549	UTU-8648	
UTU-25880	UTU-72028	UTU-28212	
UTU-28213	UTU-72632	UTU-30289	
UTU-29535	UTU-73009	UTU-31260	
UTU-29797	UTU-73010	UTU-33433	
UTU-31736	UTU-73013	UTU-34711	
UTU-34350	UTU-73175	UTU-46699	
UTU-34705	UTU-73434	UTU-78852	
UTU-37116	UTU-73435	UTU-78853	
UTU-37355	UTU-73444	UTU-78854	
UTU-37573	UTU-73450	UTU-075939	
UTU-38261	UTU-73900	UTU-0149767	
UTU-39223	UTU-74409	UTU-2078	
UTU-40729	UTU-74410	UTU-44426	
UTU-40736	UTU-74413	UTU-49530	
UTU-42469	UTU-74414	UTU-51026	

**OPERATOR CHANGE WORKSHEET**

**ROUTING**

1. GLH	<input checked="" type="checkbox"/>	4-KAS	<input type="checkbox"/>
2. CDW	<input checked="" type="checkbox"/>	5-LP	<input checked="" type="checkbox"/>
3. JLT	<input type="checkbox"/>	6-FILE	<input type="checkbox"/>

Enter date after each listed item is completed

Change of Operator (Well Sold)

Designation of Agent

Operator Name Change (Only)

**X** Merger

The operator of the well(s) listed below has changed, effective: **3-09-2001**

<b>FROM: (Old Operator):</b>
COASTAL OIL & GAS CORPORATION
Address: 9 GREENWAY PLAZA STE 2721
HOUSTON, TX 77046-0995
Phone: 1-(713)-418-4635
Account N0230

<b>TO: (New Operator):</b>
EL PASO PRODUCTION OIL & GAS COMPANY
Address: 9 GREENWAY PLAZA STE 2721 RM 2975B
HOUSTON, TX 77046-0995
Phone: 1-(832)-676-4721
Account N1845

**CA No.**

**Unit: NATURAL BUTTES**

**WELL(S)**

NAME	API NO	ENTITY NO	SEC TWN RNG	LEASE TYPE	WELL TYPE	WELL STATUS
CIGE 135-3-10-21	43-047-32001	2900	03-10S-21E	FEDERAL	GW	P
CIGE 166-3-10-21	43-047-32172	2900	03-10S-21E	FEDERAL	GW	P
CIGE 266-3-10-21	43-047-32995	2900	03-10S-21E	FEDERAL	GW	P
NBU 330	43-047-33228	2900	03-10S-21E	FEDERAL	GW	P
CIGE 225-3-10-21	43-047-33417	99999	03-10S-21E	FEDERAL	GW	APD
NBU 365	43-047-33777	2900	03-10S-21E	FEDERAL	GW	DRL
NBU 28-4B	43-047-30367	2900	04-10S-21E	FEDERAL	GW	P
NBU CIGE 38-4-10-21	43-047-30495	2900	04-10S-21E	FEDERAL	GW	P
NBU 207-4	43-047-31177	2900	04-10S-21E	FEDERAL	GW	P
CIGE 108D-4-10-21	43-047-31756	2900	04-10S-21E	FEDERAL	GW	P
NBU 390-4E	43-047-32835	2900	04-10S-21E	FEDERAL	GW	P
CIGE 206-4-10-21	43-047-32996	2900	04-10S-21E	FEDERAL	GW	P
NBU 326-4E	43-047-33697	2900	04-10S-21E	FEDERAL	GW	P
NBU 29-5B	43-047-30368	2900	05-10S-21E	FEDERAL	GW	P
NBU 12-5-10-21 GR	43-047-30426	11634	05-10S-21E	FEDERAL	GW	P
COG NBU 102	43-047-31757	2900	05-10S-21E	FEDERAL	GW	P
NBU 114	43-047-31923	2900	05-10S-21E	FEDERAL	GW	S
NBU 391-5E	43-047-32988	2900	05-10S-21E	FEDERAL	GW	P
NBU 16-6B	43-047-30316	2900	06-10S-21E	FEDERAL	GW	P
NBU CIGE 30-6-10-21	43-047-30498	2900	06-10S-21E	FEDERAL	GW	S

**OPERATOR CHANGES DOCUMENTATION**

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 06/19/2001
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 06/19/2001
- The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 06/21/2001
- Is the new operator registered in the State of Utah: YES Business Number: 608186-0143

5. If **NO**, the operator was contacted contacted on: N/A
6. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the (merger, name change, or operator change for all wells listed on Federal or Indian leases on: 07/10/2001
7. **Federal and Indian Units:** The BLM or BIA has approved the successor of unit operator for wells listed on: 07/10/2001
8. **Federal and Indian Communization Agreements ("CA"):** The BLM or the BIA has approved the operator change for all wells listed involved in a CA on: 07/10/2001
9. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

---

**DATA ENTRY:**

1. Changes entered in the **Oil and Gas Database** on: 08/02/2001
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 08/02/2001
3. Bond information entered in RBDMS on: N/A
4. Fee wells attached to bond in RBDMS on: N/A

---

**STATE BOND VERIFICATION:**

1. State well(s) covered by Bond No.: N/A

---

**FEDERAL BOND VERIFICATION:**

1. Federal well(s) covered by Bond No.: WY 2793

---

**FEE WELLS - BOND VERIFICATION/LEASE INTEREST OWNER NOTIFICATION:**

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond No: N/A
2. The **FORMER** operator has requested a release of liability from their bond on: N/A  
The Division sent response by letter on: N/A
3. (R649-2-10) The **FORMER** operator of the Fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: \_\_\_\_\_

---

**FILMING:**

1. All attachments to this form have been **MICROFILMED** on: \_\_\_\_\_

---

**FILING:**

1. **ORIGINALS/COPIES** of all attachments pertaining to each individual well have been filled in each well file on: \_\_\_\_\_

---

**COMMENTS: Master list of all wells involved in operator change from Coastal Oil & Gas Corporation to El Paso Production Oil and Gas Company shall be retained in the "Operator Change File".**

---

---

---

---

---

JAN. 17. 2003 3:34PM

TPORT

NO. 173

P. 2

**WESTPORT OIL AND GAS COMPANY, L.P.**

410 Seventeenth Street #2300 Denver Colorado 80202-4436  
Telephone: 303 573 5404 Fax: 303 573 5609

February 1, 2002

Department of the Interior  
Bureau of Land Management  
2850 Youngfield Street  
Lakewood, CO 80215-7093  
Attention: Ms. Martha Maxwell

RE: BLM Bond CO-1203  
BLM Nationwide Bond 158626364  
Surety - Continental Casualty Company  
Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.  
Conversion of Westport Oil and Gas Company, Inc., into Westport Oil and Gas Company, L.P.  
Assumption Rider - Westport Oil and Gas Company, L.P.

Dear Ms. Maxwell:

Pursuant to our recent conversations, please find the following list of enclosures for the BLM's consideration and approval:

Two (2) Assumption Riders, fully executed originals.  
Copies of Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.  
Copies of Westport Oil and Gas Company, Inc., conversion into Westport Oil and Gas Company, L.P.  
List of all Federal/BIA/State Leases - Belco/Westport's leases - in all states.

Please inform us of any additional information needed to complete the change to Westport Oil and Gas Company, L.P., as operator of record.

I thank you for your assistance and cooperation in this matter. Please do not hesitate contacting the undersigned, should a question arise.

Sincerely,  
Westport Oil and Gas Company, L.P.

Debby J. Black  
Engineer Technician

Encl:



United States Department of the Interior **RECEIVED**

BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155

FEB 22 2002

DIVISION OF  
OIL, GAS AND MINING

In Reply Refer To:

3106

UTU-25566 et al

(UT-924)

FEB 21 2002

NOTICE

Westport Oil and Gas Company L.P. : Oil and Gas  
410 Seventeenth Street, #2300 :  
Denver Colorado 80215-7093 :

Name Change Recognized

Acceptable evidence has been received in this office concerning the name change of Westport Oil and Gas Company, Inc. into Westport Oil and Gas Company, L.P. with Westport Oil and Gas Company, L.P. being the surviving entity.


For our purposes, the name change is recognized effective December 31, 2001.

The oil and gas lease files identified have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Westport Oil and Gas Company, Inc. to Westport Oil and Gas Company, L.P.. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Colorado.

UTU-03405  
UTU-20895  
UTU-25566  
UTU-43156  
UTU-49518  
UTU-49519  
UTU-49522  
UTU-49523



Robert Lopez  
Chief, Branch of  
Minerals Adjudication

cc: Moab Field Office  
Vernal Field Office  
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217  
State of Utah, DOGM, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114  
Teresa Thompson (UT-922)  
Joe Incardine (UT-921)

July 2, 2002

Mr. Jim Thompson, Eng Tech  
State of Utah  
Division of Oil, Gas, and Mining  
1594 West North Temple, Suite 1210  
PO Box 145801  
Salt Lake City, Utah 84114-5801

Re: Well Name Verification

Dear Mr. Thompson


On behalf of El Paso Production Oil and Gas Co I would like to apologize for the well name confusion that has developed over the past few years. Believe me it's not just between the Government agencies and El Paso, we also have had the same problem internally.

Over the years well names get shortened, abbreviated, and in some cases made longer. Unfortunately these revised names become the common name and as you know all information about these wells is reported by the revised name rather than the official name.

Thank you for helping us identify the wells in our system that have gone through this metamorphosis. Please find attached a list of these wells. Note that we have divided the wells into three categories: 1) Yellow highlight is used to identify wells that the state needs to change to match El Paso's database. 2) Blue highlight is used to identify wells that El Paso will change to match the state database. 3) Green highlight is used for wells that have an unnecessary extension that both El Paso and the state need to remove.

El Paso now requests that these names be officially changed as described above. We hope this will help avoid any future confusion that may arise trying to identify these wells. If you have any additional questions please do not hesitate to call our regulatory analyst Cheryl Cameron or myself.

Sincerely,



Sam C. Prutch  
Engineering Manager

**RECEIVED**

AUG 05 2002

**DIVISION OF  
OIL, GAS AND MINING**

1368 South 1200 East • Vernal, UT 84078  
435.781.7037 Phone • 435.781.7095 Fax

CIGE 213-33-9-22	<change to>	CIGE 213	43-047-32933	22E 9S 0033
CIGE 212-34-9-22	<change to>	CIGE 212	43-047-32938	22E 9S 0034
CIGE 209-15-10-21	<change to>	CIGE 209	43-047-32943	21E 10S 0015
CIGE 193-35-9-22	<change to>	CIGE 193	43-047-32973	22E 9S 0035
CIGE 207-8-10-21	<change to>	CIGE 207	43-047-32975	21E 10S 0008
CIGE 223-1-10-22	<change to>	CIGE 223	43-047-32983	22E 10S 0001
CIGE 226-3-10-21	<change to>	CIGE 226	43-047-32995	21E 10S 0003
CIGE 206-4-10-21	<change to>	CIGE 206	43-047-32996	21E 10S 0009
CIGE 208-8-10-21	<change to>	CIGE 208	43-047-32997	21E 10S 0008
CIGE 227-9-10-21	<change to>	CIGE 227	43-047-32998	21E 10S 0009
CIGE 228-15-10-21	<change to>	CIGE 228	43-047-32999	21E 10S 0015
CIGE 196-6-10-22	<change to>	CIGE 196	43-047-33003	22E 10S 0006
CIGE 229-1-10-20	<change to>	CIGE 229	43-047-33006	20E 10S 0001
CIGE 231-7-9-21	<change to>	CIGE 231	43-047-33021	21E 9S 0007
CIGE 233-21-9-21	<change to>	CIGE 233		
NBU 389-29E	<change to	NBU 389-29E (REG)	43-047-33049	22E 9S 0029
NBU 489-7E	<change to	NBU 489-7E (REG)	43-047-33121	21E 9S 0007
NBU 508-8E	<change to	NBU 508-8E (REG)	43-047-33124	21E 10S 0008
NBU 322-15E	<change to	NBU 322-15E (REG)	43-047-33139	20E 9S 0015
CIGE 239-35-9-21	<change to>	CIGE 239	43-047-33206	21E 9S 0035
CIGE 241-32-9-22	<change to>	CIGE 241	43-047-33208	22E 9S 0032
CIGE 244-1-10-21	<change to>	CIGE 244	43-047-33209	21E 10S 0001
CIGE 245-1-10-21	<change to>	CIGE 245	43-047-33210	10S 0008
CIGE 248-21-10-21	<change to>	CIGE 248	43-047-33226	21E 10S 0021
NBU 516-12E	<change to	NBU 516-12E (REG)	43-047-33696	20E 10S 0012
NBU 326-4E	<change to	NBU 326-4E (REG)	43-047-33697	21E 10S 0004
NBU 422-29E	<change to	NBU 422-29E (REG)	43-047-33698	21E 09S 0029
NBU 519-3E	<change to	NBU 519-3E (REG)	43-047-33779	21E 09S 0003
NBU 392-6E	<change to	NBU 392-6E (REG)	43-047-33783	21E 10S 0006
NBU 484-20E	<change to	NBU 484-20E (REG)	43-047-33784	21E 09S 0020

# memorandum

Branch of Real Estate Services  
Uintah & Ouray Agency

Date: 5 December, 2002

Reply to  
Attn of: Supervisory Petroleum Engineer

Subject: Modification of Utah Division of Oil, Gas and Mining Regulations

To: Director, Utah Division of Oil, Gas and Mining Division: John Baza

We have been advised of changes occurring with the operation of your database for Change of Operator. You will be modifying your records to reflect Change of Operator once you have received all necessary documentation from the companies involved, and perhaps in advance of our Notice of Concurrence/Approval of Change of Operator where Indian leases are involved.

We have no objection.

With further comment to Rulemaking, I wish to comment concerning the provision of Exhibits for upcoming Hearings. I would like to see the Uintah & Ouray Agency, BIA, and the Ute Indian Tribe, Energy & Mineral Resources Department added to the list of those parties that receive advance Exhibits so as to allow us to have research time prior to Hearing dates. We will be able to provide a more informed recommendation to the Oil, Gas and Mining Board. It would be best if we would receive only those Exhibits that concern Indian lands, specifically on or adjacent to Indian lands. This may be a difficult situation to attain, as it is not always clear where 'on or adjacent' occurs.

I am aware that you have gone to extra effort to correct this matter already, and I fully appreciate it. My request is intended only to allow the addition of Uintah & Ouray Agency and Ute Indian Tribe to the official listing.

We appreciate your concern, and hope that these comments are timely enough for consideration in the revision process.



CC: Minerals & Mining Section of RES  
Ute Energy & Mineral Resources Department: Executive Director  
chronos



# United States Department of the Interior

BUREAU OF INDIAN AFFAIRS

Washington, D.C. 20240

FEB 10 2003

IN REPLY REFER TO:  
Real Estate Services

Carroll A. Wilson  
Principal Landman  
Westport Oil and Gas Company, L.P.  
1368 South 1200 East  
Vernal, Utah 84078

Dear Mr. Wilson:

This is in response to your request for approval of RLI Insurance Company's Nationwide Oil and Gas Lease Bond No. RLB0005239 executed effective December 17, 2002, (\$150,000 coverage) with Westport Oil and Gas Company, L. P., as principal.

This bond is hereby approved as of the date of this correspondence and will be retained in the Bureau of Indian Affairs' Division of Real Estate Services, 1849 C Street, NW, MS-4512-MIB, Washington, D.C. 20240. All Bureau oil and gas regional offices and the surety are being informed of this action.

In cases where you have existing individual and/or collective bonds on file with one or more of our regional offices, you may now request those offices, directly, to terminate in lieu of coverage under this Nationwide Bond.

Enclosed is a copy of the approved bond for your files. If we may be of further assistance in this matter, please advise.

Sincerely,

Director, Office of Trust Responsibilities

ACTING

Enclosure



# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155

IN REPLY REFER TO  
UT-922

February 27, 2003

Westport Oil and Gas Company, L.P.  
Attn: Gary D. Williamson  
1670 Broadway, Suite 2800  
Denver, Colorado 80202

Re: Natural Buttes Unit  
Uintah County, Utah

Gentlemen:

On February 27, 2003, we received an indenture dated December 17, 2002, whereby El Paso Production Oil & Gas Company resigned as Unit Operator and Westport Oil and Gas Company, L.P., was designated as Successor Unit Operator for the Natural Buttes Unit, Uintah County, Utah.

This indenture was executed by all required parties and the signatory parties have complied with Sections 5 and 6 of the unit agreement. The instrument is hereby approved effective February 27, 2003. In approving this designation, the Authorized Officer neither warrants nor certifies that the designated party has obtained all required approval that would entitle it to conduct operations under the Natural Buttes Unit Agreement.

Your nationwide (Colorado) oil and gas bond No. 1203 will be used to cover all operations within the Natural Buttes Unit.

It is requested that you notify all interested parties of the change in unit operator. Copies of the approved instruments are being distributed to the appropriate federal offices, with one copy returned herewith.

Sincerely,

/s/ Robert A. Henricks

Robert A. Henricks  
Chief, Branch of Fluid Minerals

Enclosure

bcc: Field Manager - Vernal (w/enclosure)  
SITLA  
Division of Oil, Gas & Mining  
Minerals Adjudication Group  
File - Natural Buttes Unit (w/enclosure)  
Agr. Sec. Chron  
Fluid Chron

UT922:TAThompson:tt:02/27/2003

RECEIVED

FEB 28 2003

DIV. OF OIL, GAS & MINING

STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>		5. LEASE DESIGNATION AND SERIAL NUMBER:
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME:
2. NAME OF OPERATOR: El Paso Production Oil & Gas Company		8. WELL NAME and NUMBER: Exhibit "A"
3. ADDRESS OF OPERATOR: 9 Greenway Plaza CITY Houston STATE TX ZIP 77064-0995		9. API NUMBER:
PHONE NUMBER: (832) 676-5933		10. FIELD AND POOL, OR WILDCAT:
4. LOCATION OF WELL		
FOOTAGES AT SURFACE:		COUNTY:
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		STATE: <b>UTAH</b>


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Operator change to Westport Oil and Gas Company, L.P., 1670 Broadway, Suite 2800, Denver, CO. 80202-4800, effective December 17, 2002.

BOND # \_\_\_\_\_  
State Surety Bond No. RLB0005236  
Fee Bond No. RLB0005238

EL PASO PRODUCTION OIL & GAS COMPANY

By:   
Jon R. Nelsen, Attorney-in-Fact

**RECEIVED**  
**FEB 28 2003**  
DIV. OF OIL, GAS & MINING

WESTPORT OIL AND GAS COMPANY, L.P.	
NAME (PLEASE PRINT) David R. Dix	TITLE Agent and Attorney-in-Fact
SIGNATURE 	DATE 12/17/02

(This space for State use only)

Form 3160-5  
(August 1999)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS  
Do not use this form for proposals to drill or reenter an  
abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

5. Lease Serial No.  
**SEE ATTACHED EXHIBIT "A"**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.  
**SEE ATTACHED EXHIBIT "A"**

9. API Well No.  
**SEE ATTACHED EXHIBIT "A"**

10. Field and Pool, or Exploratory Area

11. County or Parish, State  
**UINTAH COUNTY, UT**

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
**WESTPORT OIL & GAS COMPANY, L.P.**

3a. Address  
**P.O. BOX 1148 VERNAL, UT 84078**

3b. Phone No. (include area code)  
**(435) 781-7023**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

**SEE ATTACHED EXHIBIT "A"**

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize <input type="checkbox"/> Deepen <input type="checkbox"/> Production (Start/Resume) <input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing <input type="checkbox"/> Fracture Treat <input type="checkbox"/> Reclamation <input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair <input type="checkbox"/> New Construction <input type="checkbox"/> Recomplete <input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans <input type="checkbox"/> Plug and Abandon <input type="checkbox"/> Temporarily Abandon <b>SUCCESSOR OF OPERATOR</b>
	<input type="checkbox"/> Convert to Injection <input type="checkbox"/> Plug Back <input type="checkbox"/> Water Disposal

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zone. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed when testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

WESTPORT OIL & GAS COMPANY, L.P., IS CONSIDERED TO BE THE OPERATOR ON THE ATTACHED DESCRIBED LANDS AND IS RESPONSIBLE UNDER THE TERMS AND CONDITIONS OF THE LEASE FOR THE OPERATIONS CONDUCTED ON THE LEASED LANDS OR PORTIONS THEREOF. BOND COVERAGE FOR THIS WELL IS PROVIDED BY FEDERAL NATIONWIDE BOND NO. 158626364, EFFECTIVE FEBRUARY 1, 2002, AND BIA NATIONWIDE BOND NO. RLB0005239, EFFECTIVE FEBRUARY 10, 2003.

RECEIVED  
MAR 04 2003

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) **CHERYL CAMERON** Title **OPERATIONS**

Signature *Cheryl Cameron* Date **March 4, 2003**

DIV. OF OIL, GAS & MINING

**THIS SPACE FOR FEDERAL OR STATE USE**

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_

Office \_\_\_\_\_

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

**OPERATOR CHANGE WORKSHEET**

**ROUTING**

1. GLH
2. CDW <input checked="" type="checkbox"/>
3. FILE

**X Change of Operator (Well Sold)**

Designation of Agent/Operator

Operator Name Change

Merger

The operator of the well(s) listed below has changed, effective: **12-17-02**

<b>FROM: (Old Operator):</b>	<b>TO: (New Operator):</b>
EL PASO PRODUCTION OIL & GAS COMPANY	WESTPORT OIL & GAS COMPANY LP
Address: 9 GREENWAY PLAZA	Address: P O BOX 1148
HOUSTON, TX 77064-0995	VERNAL, UT 84078
Phone: 1-(832)-676-5933	Phone: 1-(435)-781-7023
Account No. N1845	Account No. N2115

**CA No. Unit: NATURAL BUTTES**

**WELL(S)**

NAME	SEC TWN RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
NBU CIGE 18-2-10-21	02-10S-21E	43-047-30471	2900	STATE	GW	P
NBU CIGE 80D-2-10-21	02-10S-21E	43-047-30853	2900	STATE	GW	P
CIGE 285	02-10S-21E	43-047-34793	99999	STATE	GW	APD
NBU CIGE 40-3-10-21	03-10S-21E	43-047-30740	2900	FEDERAL	GW	P
NBU CIGE 93D-3-10-21J	03-10S-21E	43-047-31163	2900	FEDERAL	GW	P
NBU CIGE 135-3-10-21	03-10S-21E	43-047-32001	2900	FEDERAL	GW	S
COG NBU 101	03-10S-21E	43-047-31755	2900	FEDERAL	GW	P
CIGE 166-3-10-21	03-10S-21E	43-047-32172	2900	FEDERAL	GW	P
CIGE 225-3-10-21	03-10S-21E	43-047-33417	99999	FEDERAL	GW	APD
CIGE 226-3-10-21	03-10S-21E	43-047-32995	2900	FEDERAL	GW	S
NBU 330	03-10S-21E	43-047-33228	2900	FEDERAL	GW	P
NBU 331	03-10S-21E	43-047-33229	2900	FEDERAL	GW	PA
NBU 365	03-10S-21E	43-047-33777	2900	FEDERAL	GW	P
NBU 25	03-10S-21E	43-047-30237	2900	FEDERAL	GW	PA
CIGE 206-4-10-21	04-10S-21E	43-047-32996	2900	FEDERAL	GW	P
NBU 326-4E	04-10S-21E	43-047-33697	2900	FEDERAL	GW	P
CIGE 108D-4-10-21	04-10S-21E	43-047-31756	2900	FEDERAL	GW	P
CIGE 136-4-10-21	04-10S-21E	43-047-31979	2900	STATE	GW	S
NBU 207-4J	04-10S-21E	43-047-31177	2900	FEDERAL	GW	P
NBU 28-4B	04-10S-21E	43-047-30367	2900	FEDERAL	GW	P

**OPERATOR CHANGES DOCUMENTATION**

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 02/28/2003
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 03/04/2003
- The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 03/06/2003
- Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- If **NO**, the operator was contacted on: \_\_\_\_\_

6. (R649-9-2)Waste Management Plan has been received on: IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM-12/31/2003 BIA-12/5/02

8. **Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: 02/27/2003

9. **Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: N/A

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

**DATA ENTRY:**

1. Changes entered in the **Oil and Gas Database** on: 03/19/2003
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 03/19/2003
3. Bond information entered in RBDMS on: N/A
4. Fee wells attached to bond in RBDMS on: N/A

**STATE WELL(S) BOND VERIFICATION:**

1. State well(s) covered by Bond Number: RLB 0005236

**FEDERAL WELL(S) BOND VERIFICATION:**

1. Federal well(s) covered by Bond Number: 158626364

**INDIAN WELL(S) BOND VERIFICATION:**

1. Indian well(s) covered by Bond Number: RLB 0005239

**FEE WELL(S) BOND VERIFICATION:**

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB 0005238

2. The **FORMER** operator has requested a release of liability from their bond on: N/A

The Division sent response by letter on: N/A

**LEASE INTEREST OWNER NOTIFICATION:**

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: N/A

**COMMENTS:**

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Division of Oil, Gas and Mining  
**OPERATOR CHANGE WORKSHEET**

**ROUTING**

1. DJJ
2. CDW

**X Change of Operator (Well Sold)**

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective: **1/6/2006**

<b>FROM:</b> (Old Operator): N2115-Westport Oil & Gas Co., LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024	<b>TO:</b> ( New Operator): N2995-Kerr-McGee Oil & Gas Onshore, LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024
---	--

CA No.		Unit:		NATURAL BUTTES UNIT				
WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS

**OPERATOR CHANGES DOCUMENTATION**

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- If **NO**, the operator was contacted on:
- (R649-9-2) Waste Management Plan has been received on: IN PLACE
- Inspections of LA PA state/fee well sites complete on: n/a 3 LA wells & all PA wells transferred
- Reports current for Production/Disposition & Sundries on: ok
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet

**7. Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006

**8. Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: n/a

**9. Underground Injection Control ("UIC")** The Division has approved UIC Form 5, Transfer of Authority to **Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on:

**DATA ENTRY:**

- Changes entered in the **Oil and Gas Database** on: 5/15/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
- Bond information entered in RBDMS on: 5/15/2006
- Fee/State wells attached to bond in RBDMS on: 5/16/2006
- Injection Projects to new operator in RBDMS on: \_\_\_\_\_
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

**BOND VERIFICATION:**

- Federal well(s) covered by Bond Number: CO1203
  - Indian well(s) covered by Bond Number: RLB0005239
  - (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
  - The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG
- The Division sent response by letter on: \_\_\_\_\_

**LEASE INTEREST OWNER NOTIFICATION:**

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

**COMMENTS:**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
**KERR-McGEE OIL & GAS ONSHORE LP**

3a. Address  
**1368 SOUTH 1200 EAST VERNAL, UT 84078**

3b. Phone No. (include area code)  
**(435) 781-7024**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**SEE ATTACHED**

5. Lease Serial No.  
**MULTIPLE LEASES**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.  
**MUTIPLE WELLS**

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State  
**UINTAH COUNTY, UTAH**

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>CHANGE OF OPERATOR</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006. KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

**RECEIVED**

**MAY 10 2006**

DIV. OF OIL, GAS & MINING

**BLM BOND = C01203**  
**BIA BOND = RLB0005239**

**APPROVED 5/16/06**

*Earlene Russell*  
**Earlene Russell, Engineering Technician**  
 Division of Oil, Gas and Mining

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) <b>RANDY BAYNE</b>	Title <b>DRILLING MANAGER</b>
Signature <i>Randy Bayne</i>	Date <b>May 9, 2006</b>

**THIS SPACE FOR FEDERAL OR STATE USE**

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
**WESTPORT OIL & GAS COMPANY L.P.**

3a. Address  
**1368 SOUTH 1200 EAST VERNAL, UT 84078**

3b. Phone No. (include area code)  
**(435) 781-7024**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**SEE ATTACHED**

5. Lease Serial No.  
**MULTIPLE LEASES**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.  
**MUTIPLE WELLS**

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State  
**UINTAH COUNTY, UTAH**

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other <b>CHANGE OF OPERATOR</b>

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

**APPROVED** 5/16/06  
*Earlene Russell*  
 Division of Oil, Gas and Mining  
 Earlene Russell, Engineering Technician

RECEIVED  
 MAY 10 2006

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) <b>BRAD LANEY</b>	Title <b>ENGINEERING SPECIALIST</b>
Signature	Date <b>May 9, 2006</b>

**THIS SPACE FOR FEDERAL OR STATE USE**

Approved by <i>Brad Laney</i>	Title	Date <b>5-9-06</b>
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



## United States Department of the Interior

BUREAU OF LAND MANAGEMENT  
Colorado State Office  
2850 Youngfield Street  
Lakewood, Colorado 80215-7076

IN REPLY REFER TO:

CO922 (MM)  
3106  
COC017387 et. al.

March 23, 2006

### NOTICE

Kerr-McGee Oil & Gas Onshore L.P. :  
1999 Broadway, Suite 3700 : Oil & Gas  
Denver, CO 80202 :

#### Merger/Name Change - Recognized

On February 28, 2006 this office received acceptable evidence of the following mergers and name conversion:

Kerr-McGee Oil & Gas Onshore L.P., a Delaware Limited Partnership, and Kerr-McGee Oil & Gas Onshore LLC, a Delaware Limited Partnership merger with and into Westport Oil and Gas Company L.P., a Delaware Limited Partnership, and subsequent Westport Oil & Gas Company L.P. name conversion to Kerr-McGee Oil & Gas Onshore L.P.

For our purposes the merger and name conversion was effective January 4, 2006, the date the Secretary of State of Delaware authenticated the mergers and name conversion.

Kerr-McGee Oil & Gas Onshore L.P. provided a list of oil and gas leases held by the merging parties with the request that the Bureau of Land Management change all their lease records from the named entities to the new entity, Kerr-McGee Oil & Gas Onshore L.P. In response to this request each state is asked to retrieve their own list of leases in the names of these entities from the Bureau of Land Management's (BLM) automated LR2000 data base.

The oil and gas lease files identified on the list provided by Kerr-McGee Oil & Gas Onshore L.P. have been updated as to the merger and name conversion. We have not abstracted the lease files to determine if the entities affected by the acceptance of these documents holds an interest in the lease, nor have we attempt to identify leases where the entity is the operator on the ground that maintains vested record title or operating rights interests. If additional documentation, for change of operator, is required you will be contacted directly by the appropriate Field Office. The Mineral Management Services (MMS) and other applicable BLM offices were notified of the merger with a copy of this notice

Please contact this office if you identify additional leases where the merging party maintains an interest, under our jurisdiction, and we will document the case files with a copy of this notice. If the leases are under the jurisdiction of another State Office that information will be forwarded to them for their action.

Three riders accompanied the merger/name conversion documents which will add Kerr-McGee Oil and Gas Onshore LLC as a principal to the 3 Kerr-McGee bonds maintained by the Wyoming State Office. These riders will be forward to them for their acceptance.

The Nationwide Oil & Gas Continental Casualty Company Bond #158626364 (BLM Bond #CO1203), maintained by the Colorado State Office, will remain in full force and effect until an assumption rider is accepted by the Wyoming State Office that conditions their Nationwide Safeco bond to accept all outstanding liability on the oil and gas leases attached to the Colorado bond.

If you have questions about this action you may call me at 303.239.3768.

/s/Martha L. Maxwell  
Martha L. Maxwell  
Land Law Examiner  
Fluid Minerals Adjudication

**Attachment:**

List of OG Leases to each of the following offices:

MMS MRM, MS 357B-1

WY, UT, NM/OK/TX, MT/ND, WY State Offices

CO Field Offices

Wyoming State Office

Rider #1 to Bond WY2357

Rider #2 to Bond WY1865

Rider #3 to Bond WY1127



# United States Department of the Interior



BUREAU OF LAND MANAGEMENT  
Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155  
<http://www.blm.gov>

IN REPLY REFER TO:  
3106  
(UT-922)

March 27, 2006

## Memorandum

To: Vernal Field Office

From: Chief, Branch of Fluid Minerals

Subject: Merger Approval

Attached is an approved copy of the merger recognized by the Bureau of Land Management, Colorado State Office. We have updated our records to reflect the merger from Westport Oil and Gas Company L.P. into Kerr-McGee Onshore Oil and Gas Company. The merger was approved effective January 4, 2006.

Chief, Branch of  
Fluid Minerals

## Enclosure

Approval letter from BLM COSO (2 pp)

cc: MMS, Reference Data Branch, James Sykes, PO Box 25165, Denver CO 80225  
State of Utah, DOGM, Attn: Earlene Russell, PO Box 145801, SLC UT 84114  
Teresa Thompson  
Joe Incardine  
Connie Seare  
Dave Mascarenas  
Susan Bauman

RECEIVED

MAR 28 2006

DIR. OF OIL, GAS & MINES

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
Multiple Leases

6. If Indian, Allottee or Tribe Name

**SUBMIT IN TRIPLICATE** – Other instructions on page 2.

1. Type of Well  
 Oil Well     Gas Well     Other

2. Name of Operator  
EOG Resources, Inc

3a. Address  
1060 EAST HIGHWAY 40, VERNAL, UT 84078

3b. Phone No. (include area code)  
435-781-9145

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
See Attached

7. If Unit of CA/Agreement, Name and/or No.  
Natural Buttes

8. Well Name and No.  
Multiple Wells

9. API Well No.  
See Attached

10. Field and Pool or Exploratory Area  
Natural Buttes

11. Country or Parish, State  
Utah, Utah

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>Change of Operator</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. has assigned all of its right, title and interest in the wells described in the attached list ("the Subject Wells") to Kerr-McGee Oil & Gas Onshore LP and will relinquish and transfer operatorship of all of the Subject Wells to Kerr-McGee Oil & Gas Onshore LP on January 1, 2010.

As of January 1, 2010, Kerr-McGee Oil & Gas Onshore LP will be considered to be the operator of each of the Subject Wells and will be responsible under the terms and conditions of the applicable lease for the operations conducted upon the leased lands. Bond coverage is provided under Kerr-McGee Oil & Gas Onshore LP's Nationwide BLM Bond No. WYB-000291.

Kerr-McGee Oil & Gas Onshore LP  
1099 18th Street, Suite 1800  
Denver, CO 80202-1918

Accepted by the  
Utah Division of  
Oil, Gas and Mining  
For Record Only *ER 1/31/2010*

By: Michael A. Nixon Date: 12/17/2009  
Michael A. Nixon  
Agent and Attorney-in-Fact

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed)  
J. Michael Schween

Title Agent and Attorney-in-Fact

Signature [Signature] Date 12/17/2009

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

RECEIVED

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date **DEC 24 2009**

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office **DIV. OF OIL, GAS & MINING**

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Lease #	API #	Well Name	Footages	Legal Description
UTUO2270A	4304730261	NBU 1-07B	1975' FNL 1850' FWL	T10S-R21E-07-SESW
UTUO144868	4304730262	NBU 2-15B	1630' FSL 2125' FEL	T09S-R20E-15-NWSE
ML22651	4304730267	NBU 3-02B	1819' FNL 716' FWL	T10S-R22E-02-SWNW
UTUO10954A	4304730273	NBU 4-35B	2037' FNL 2539' FWL	T09S-R22E-35-SESW
ML22650	4304730272	NBU 5-36B	1023' FNL 958' FWL	T09S-R22E-36-NWNW
UTUO1791	4304730278	NBU 7-09B	330' FSL 1600' FWL	T10S-R21E-09-SESW
UTUO1207 ST	4304730274	NBU 10-29B	1100' FSL 1540' FEL	T09S-R22E-29-SWSE
UTUO1791	4304730294	NBU 13-08B	1600' FSL 1300' FEL	T10S-R21E-08-NESE
UTUO581	4304730296	NBU 15-29B	821' FNL 687' FWL	T09S-R21E-29-NWNW
UTUO1791	4304730316	NBU 16-06B	330' FSL 900' FEL	T10S-R21E-06-SESE
UTUO2270A	4304730317	NBU 17-18B	1014' FSL 2067' FEL	T10S-R21E-18-SWSE
UTUO144869	4304730328	NBU 19-21B	2015' FNL 646' FEL	T09S-R20E-21-SENE
UTUO575	4304730363	NBU 25-20B	1905' FNL 627' FWL	T09S-R21E-20-SWNW
UTU4485	4304730364	NBU 26-13B	600' FSL 661' FEL	T10S-R20E-13-SESE
UTUO1393B	4304730367	NBU 28-04B	529' FNL 2145' FWL	T10S-R21E-04-NENW
UTUO1393B	4304730368	NBU 29-05B	398' FSL 888' FWL	T10S-R21E-05-SESE
UTUO575	4304730380	NBU 30-18B	1895' FSL 685' FEL	T09S-R21E-18-NESE
ML01197A	4304730385	NBU 31-12B	565' FNL 756' FWL	T10S-R22E-12-NWNW
UTU461	4304730396	NBU 33-17B	683' FSL 739' FWL	T09S-R22E-17-SWSW
UTUO575	4304730404	NBU 34-17B	210' FNL 710' FEL	T09S-R21E-17-NENE
UTUO149767	4304730397	NBU 35-08B	1830' FNL 660' FWL	T09S-R21E-8-SWNW
UTUO144878B	4304730470	NBU 49-12B	551' FSL 1901' FEL	T09S-R20E-12-SWSE
UTUO140225	4304730473	NBU 52-01B	659' FSL 658' FEL	T09S-R21E-01-SESE
UTUO141315	4304730474	NBU 53-03B	495' FSL 601' FWL	T09S-R21E-03-SWSW
ML21510	4304730475	NBU 54-02B	660' FSL 660' FWL	T09S-R21E-02-SWSW
UTUO1193	4304730464	NBU 57-12B	676' FSL 1976' FEL	T09S-R21E-12-SWSE
UTUO1198B	4304730463	NBU 58-23B	1634' FNL 2366' FEL	T10S-R22E-23-SWNE
UTUO37167	4304730477	NBU 62-35B	760' FNL 2252' FEL	T10S-R22E-35-NWNE
UTU10186	4304730466	NBU 63-12B	1364' FNL 1358' FEL	T10S-R20E-12-SWNE
UTUO37167	4304730577	NBU 70-34B	1859' FSL 2249' FWL	T10S-R22E-34-NESW
UTU4476	4304730578	NBU 71-26B	1877' FNL 528' FEL	T10S-R20E-26-SENE
UTUO141315	4304731150	NBU 202-03	898' FSL 1580' FEL	T09S-R21E-03-SWSE
UTUO1791	4304731238	NBU 205-08	1432' FSL 1267' FWL	T10S-R21E-08-NWSW
UTUO1791	4304731165	NBU 206-09	1789' FNL 1546' FWL	T10S-R21E-09-SESW
UTUO1393B	4304731177	NBU 207-04	1366' FSL 1445' FWL	T10S-R21E-04-NESW
UTUO149076	4304731153	NBU 210-24	1000' FSL 1000' FWL	T09S-R21E-24-SWSW
UTUO284	4304731156	NBU 211-20	916' FSL 822' FEL	T09S-R22E-20-SESE
UTUO284	4304731267	NBU 212-19	289' FSL 798' FWL	T09S-R22E-19-SWSW
UTU22650	4304731268	NBU 213-36J	597' FNL 659' FEL	T09S-R22E-36-NENE
ML22651	4304731282	NBU 217-02	2045' FSL 766' FWL	T10S-R22E-02-NWSW
UTUO2270A	4304731310	NBU 218-17	2600' FNL 1500' FWL	T10S-R21E-17-SESW
UTUO149076	4304731308	NBU 219-24	1300' FNL 500' FWL	T09S-R21E-24-NWNW
UTUO149076	4304732131	NBU 301-24E	700' FSL 2450' FEL	T09S-R21E-24-SWSE
UTUO1791	4304732010	NBU 302-09E	1899' FSL 912' FWL	T10S-R21E-09-NWSW
UTUO575	4304732130	NBU 304-18E	782' FSL 1783' FEL	T09S-R21E-18-SWSE
UTUO149767	4304732135	NBU 305-07E	670' FNL 1950' FWL	T09S-R21E-07-NENW
UTUO581	4304732282	NBU 306-18E	1604' FSL 2797' FWL	T09S-R21E-18-NESW
UTUO1791	4304732014	NBU 307-06E	1979' FSL 2000' FEL	T10S-R21E-06-NWSE
UTUO284	4304732202	NBU 308-20E	1503' FSL 954' FWL	T09S-R22E-20-NWSW
UTUO575	4304732283	NBU 309-20E	930' FNL 667' FEL	T09S-R21E-20-NENE
UTUO149075	4304732203	NBU 311-23E	1101' FSL 1978' FEL	T09S-R21E-23-SWSE
UTUO581	4304732378	NBU 313-29E	1000' FNL 660' FEL	T09S-R21E-29-NENE
UTUO141315	4304732271	NBU 314-03E	1045' FSL 2584' FWL	T09S-R21E-03-SESW
UTUO575	4304732381	NBU 316-17E	1935' FNL 1067' FWL	T09S-R21E-17-SWNW
UTUO144868B	4304732362	NBU 317-12E	867' FNL 701' FEL	T09S-R20E-12-NENE
UTUO2270A	4304737511	NBU 319-17E	807' FNL 990' FWL	T10S-R21E-17-NWNW
UTUO1188	4304732379	NBU 321-10E	940' FSL 2508' FWL	T09S-R21E-10-SESW
UTUO575B	4304732376	NBU 325-08E	832' FSL 669' FWL	T09S-R21E-08-SWSW
UTUO1393B	4304733697	NBU 326-04E	1906' FNL 695' FWL	T10S-R21E-04-SWNW
UTUO1393B	4304739303	NBU 327-05E	1117' FNL 942' FEL	T10S-R21E-05-NENE (LOT 1)
UTU4485	4304732386	NBU 328-13E	1766' FSL 1944' FWL	T10S-R20E-13-NESW
UTUO1207 ST	4304732229	NBU 329-29E	2490' FNL 949' FEL	T09S-R22E-29-SENE

RECEIVED

DEC 24 2009

DIV. OF OIL, GAS & MINING

Lease #	API #	Well Name	Footages	Legal Description
UTUO10954A	4304732147	NBU 331-35E	1531' FNL 1153' FEL	T09S-R22E-35-SENE
UTUO1791	4304732148	NBU 332-08E	955' FSL 2508' FEL	T10S-R21E-08-SWSE
ML21510	4304732518	NBU 333-02E	1951' FSL 2245' FWL	T09S-R21E-02-NESW
UTUO149075	4304732265	NBU 335-23E	1419' FNL 828' FEL	T09S-R21E-23-SENE
UTUO149076	4304732264	NBU 336-24E	2024' FNL 1958' FWL	T09S-R21E-24-SENW
UTUO284	4304732281	NBU 339-19E	1890' FSL 674' FWL	T09S-R22E-19-NWSW
UTUO284B	4304732327	NBU 340-20E	1326' FSL 2569' FEL	T09S-R22E-20-NWSE
UTUO1207 ST	4304733055	NBU 341-29E	307' FSL 898' FEL	T09S-R22E-29-SESE
UTUO10954A	4304732212	NBU 342-35E	918' FNL 2563' FEL	T09S-R22E-35-NWNE
UTUO1393B	4304739338	NBU 346-05E	2233' FSL 676' FEL	T10S-R21E-05-NESE
UTUO575B	4304732326	NBU 349-07E	1641' FNL 1036' FWL	T09S-R21E-07-SWNW
UTUO1188	4304732519	NBU 352-10E	1806' FSL 842' FWL	T09S-R21E-10-NWSW
UTUO581	4304732383	NBU 356-29E	1600' FNL 1980' FEL	T09S-R21E-29-SWNE
UTUO2270A	4304732388	NBU 358-01E	736' FSL 1941' FEL	T10S-R20E-01-SWSE
UTU4485	4304750032	NBU 359-13E	661' FSL 2149' FEL	T10S-R20E-13-SWSE
UTU4485	4304732387	NBU 360-13E	1998' FSL 775' FWL	T10S-R20E-13-NWSW
ML21510	4304733782	NBU 379-02E	1967' FSL 898' FWL	T09S-R21E-02-NWSW
UTUO575	4304733064	NBU 382-18E	2030' FSL 2172' FEL	T09S-R21E-18-NWSE
UTUO149075	4304735889	NBU 384-23E	491' FSL 929' FEL	T09S-R21E-23-SESE
UTUO149076	4304733056	NBU 386-24E	450' FSL 1850' FWL	T09S-R21E-24-SESW
UTUO284	4304733057	NBU 388-19E	382' FSL 1847' FWL	T09S-R22E-19-SESW
UTUO1207 ST	4304733049	NBU 389-29E	2226' FSL 2166' FEL	T09S-R22E-29-NWSE
UTUO1393B	4304732835	NBU 390-04E	2577' FSL 1951' FWL	T10S-R21E-04-NESW
UTUO1393B	4304732988	NBU 391-05E	1215' FSL 2090' FEL	T10S-R21E-05-SWSE
UTUO1791	4304733783	NBU 392-06E	1926' FSL 611' FEL	T10S-R21E-06-NESE
UTU4485	4304733071	NBU 393-13E	1850' FSL 2141' FEL	T10S-R20E-13-NWSE
UTU4485	4304733072	NBU 394-13E	725' FSL 2027' FWL	T10S-R20E-13-SESW
UTUO1188	4304732544	NBU 400-11E	1983' FSL 1321' FWL	T09S-R21E-11-NESW
UTUO581	4304734216	NBU 421-29E	1985 FNL, 972 FEL	T09S-R21E-29-SENE
UTUO581	4304733698	NBU 422-29E	1980' FNL 785' FWL	T09S-R21E-29-SWNW
UTUO581	4304734206	NBU 423-30E	1980' FSL 660' FEL	T09S-R21E-30-NESE
ML3142	4304733699	NBU 424-32E	744' FNL 773' FEL	T09S-R21E-32-NENE
UTUO2270A	4304740049	NBU 428-07E	660' FSL 855' FWL	T10S-R21E-07-SWSW (Lot 4)
UTUO1791	4304733069	NBU 431-09E	2599' FNL 662' FWL	T10S-R21E-09-SWNW
UTUO2270A	4304738536	NBU 434-17E	1799' FNL 2176' FWL	T10S-R21E-17-SENW
UTUO2270A	4304738376	NBU 435-17E	1837' FNL 571' FWL	T10S-R21E-17-SWNW
UTUO2270A	4304734195	NBU 436-18E	1644' FSL 748' FEL	T10S-R21E-18-NESE
UTUO2270A	4304735499	NBU 437-18E	322' FSL 748' FEL	T10S-R21E-18-SESE
ML22792	4304737534	NBU 438-19E	661' FNL 1941' FEL	T10S-R21E-19-NWNE
ML22792	4304737535	NBU 439-19E	2111' FNL 1980' FWL	T10S-R21E-19-SWNE
UTUO10953	4304736279	NBU 451-01E	1965' FSL 2132' FWL	T10S-R22E-01-NESW
ML22651	4304736053	NBU 456-02E	493' FNL 1080' FWL	T10S-R22E-02-NWNW (Lot 4)
UTUO141315	4304733063	NBU 481-03E	1490' FSL 556' FEL	T09S-R21E-03-NESE
UTUO581	4304733065	NBU 483-19E	1850' FSL 1980' FWL	T09S-R21E-19-NESW
UTUO575	4304733784	NBU 484-20E	350' FNL 823' FWL	T09S-R21E-20-NWNW
UTUO2270A	4304739897	NBU 486-07E	1895 FSL' 1834' FWL	T10S-R21E-07-NESW
UTUO575B	4304733121	NBU 489-07E	763' FSL 733' FWL	T09S-R21E-07-SWSW (Lot 4)
UTUO2270A	4304733123	NBU 497-01E	2091' FSL 894' FEL	T10S-R20E-01-NESE
UTUO577A	4304733140	NBU 506-23E	720' FNL 1818' FWL	T09S-R20E-23-NENW
UTUO1791	4304733124	NBU 508-08E	915' FSL 355' FEL	T10S-R21E-08-SESE
UTUO1197A ST	4304739283	NBU 513-12EX	1850' FNL 2133' FWL	T10S-R22E-12-SENW
UTUO2270A	4304733696	NBU 516-12E	1950' FSL 1786' FEL	T10S-R20E-12-NWSE
UTUO141315	4304733779	NBU 519-03E	1749' FSL 798' FWL	T09S-R21E-03-NWSW
UTUO575B	4304733780	NBU 521-08E	2250' FSL 900' FWL	T09S-R21E-08-NWSW
UTUO1188	4304733781	NBU 522-10E	732' FSL 841' FEL	T09S-R21E-10-SESE
UTUO2270A	4304733685	NBU 523-12E	660' FSL 660' FEL	T10S-R20E-12-SESE
UTUO2270A	4304733701	NBU 524-12E	841' FSL 1795' FEL	T10S-R20E-12-SWSE
UTUO2270A	4304739722	NBU 529-07E	704' FNL 762' FWL	T10S-R21E-07-NWNW
UTUO581	4304734639	NBU 534-18E	1885' FSL 115' FWL	T09S-R21E-18-NWSW
UTUO2270A	4304735200	NBU 535-17E	1893' FSL 580' FWL	T10S-R21E-17-NWSW
ML22791	4304735252	NBU 536-18E	734' FSL 2293' FWL	T10S-R21E-18-SESW
UTUO2270A	4304735253	NBU 537-18E	1880' FSL 1830' FEL	T10S-R21E-18-NWSE

RECEIVED

DEC 24 2009

Lease #	API #	Well Name	Footages	Legal Description
UTUO284	4304735886	NBU 538-19E	1937' FSL 1833' FWL	T09S-R22E-19-NESW
UTUO149076	4304735887	NBU 539-24E	1870' FSL 477' FEL	T09S-R21E-24-NESE
UTUO10953	4304736280	NBU 546-01E	2036' FSL 699' FWL	T10S-R22E-01-NWSW
UTUO10953	4304736278	NBU 547-01E	749' FSL 598' FWL	T10S-R22E-01-SWSW
UTU474	4304737687	NBU 553-28E	767' FNL 753' FWL	T10S-R22E-28-NWNW
UTU474	4304737686	NBU 554-28E	2023' FNL 465' FWL	T10S-R22E-28-SWNW
ML22791	4304737685	NBU 555-18E	1984' FSL 1790' FWL	T10S-R21E-18-NESW
ML22791	4304737514	NBU 556-18E	1800' FSL 870' FWL	T10S-R21E-18-NWSW
ML22791	4304737513	NBU 557-18E	852' FSL 661' FWL	T10S-R21E-18-SWSW
UTUO2270A	4304737510	NBU 558-17E	748' FSL 611' FWL	T10S-R21E-17-SWSW
UTUO2278C	4304737509	NBU 559-17E	467' FSL 2065' FWL	T10S-R21E-17-SESW
UTUO2278	4304737508	NBU 560-17E	1946' FSL 1896' FWL	T10S-R21E-17-NESW
UTUO2278	4304737512	NBU 561-17E	857' FSL 1988' FEL	T10S-R21E-17-SWSE
ML22792	4304737536	NBU 562-19E	859' FNL 859' FEL	T10S-R21E-19-NENE
ML22792	4304737537	NBU 563-19E	1982' FSL 1878' FEL	T10S-R21E-19-NWSE
UTU4476	4304738962	NBU 564-26E	665' FNL 1945' FWL	T10S-R20E-26-NENW
ML22793	4304737533	NBU 565-30E	1865' FNL 1786' FEL	T10S-R21E-30-SWNE
UTUO2270A	4304738375	NBU 566-17E	538' FNL 1806' FWL	T10S-R21E-17-NENW
UTUO1791	4304738535	NBU 567-17E	690' FNL 1988' FEL	T10S-R21E-17-NWNE
UTUO1791	4304738537	NBU 568-17E	850' FNL 807' FEL	T10S-R21E-17-NENE
UTUO1791	4304738534	NBU 569-17E	2009' FNL 1809' FEL	T10S-R21E-17-SWNE
UTUO1791	4304738529	NBU 570-17E	2031' FNL 672' FEL	T10S-R21E-17-SENE
UTUO2278	4304738377	NBU 571-17E	1964' FSL 1831' FEL	T10S-R21E-17-NWSE
UTUO2278	4304738374	NBU 572-17E	1810' FSL 739' FEL	T10S-R21E-17-NESE
UTUO2278	4304738510	NBU 573-17E	813' FSL 481' FEL	T10S-R21E-17-SESE
ML22650	4304739308	NBU 602-36E	1723' FNL 719' FWL	T09S-R22E-36-SWNW
UTUO1393B	4304739305	NBU 614-05E	716' FNL 1967' FEL	T10S-R21E-05-NWNE
UTUO1393B	4304739655	NBU 615-05E	2384' FNL 1015' FEL	T10S-R21E-05-SENE
UTUO1393B	4304739337	NBU 617-04E	933' FNL 745' FWL	T10S-R21E-04-NWNW
UTUO1393B	4304739336	NBU 618-04E	998' FSL 661' FWL	T10S-R21E-04-SWSW
UTUO1393B	4304739414	NBU 625-04E	1937' FNL 1722' FWL	T10S-R21E-04-SENW
UO01197A ST	4304739192	NBU 632-12E	860' FNL 2032' FWL	T10S-R22E-12-NENW
UO01197A ST	4304739193	NBU 633-12E	789' FNL 2179' FEL	T10S-R22E-12-NWNE
UO01197A ST	4304739190	NBU 635-12E	1808' FNL 1754' FEL	T10S-R22E-12-SWNE
UTUO1197A ST	4304739191	NBU 636-12E	1824' FNL 461' FEL	T10S-R22E-12-SENE
UTUO8512 ST	4304750016	NBU 638-13E	1926' FNL 2504' FWL	T10S-R22E-13-SENW
UTUO8512 ST	4304750019	NBU 639-13E	859' FNL 1902' FEL	T10S-R22E-13-NWNE
UTUO8512 ST	4304750014	NBU 640-13E	1619' FNL 1639' FEL	T10S-R22E-13-SWNE
UTUO8512A ST	4304750058	NBU 641-13E	990' FNL 1184' FEL	T10S-R22E-13-NENE
UTUO8512 ST	4304750013	NBU 642-13E	1949' FNL 858' FEL	T10S-R22E-13-SENE
UTUO2270A	4304739957	NBU 653-07E	660' FNL 1980' FWL	T10S-R21E-07-NENW
UTUO2270A	4304739956	NBU 654-07E	1913' FNL 522' FWL	T10S-R21E-07-SWNW
UTUO2270A	4304739860	NBU 655-07E	1926' FSL 750' FWL	T10S-R21E-07-NWSW
UTUO1791	4304739856	NBU 658-01E	2177' FNL 1784' FEL	T10S-R20E-01-SWNE
UTUO2270A	4304739858	NBU 660-12E	661' FNL 691' FEL	T10S-R20E-12-NENE
ML22790	4304750011	NBU 661-24E	1734' FSL 661' FWL	T10S-R20E-24-NWSW
ML22790	4304750017	NBU 662-24E	809' FSL 807' FWL	T10S-R20E-24-SWSW
ML22790	4304750010	NBU 663-24E	810' FSL 1979' FWL	T10S-R20E-24-SESW
ML22790	4304739867	NBU 664-24E	1810' FNL 1781' FEL	T10S-R20E-24-NWSE
ML22790	4304750018	NBU 665-24E	1950' FSL 660' FEL	T10S-R20E-24-NESE
ML22790	4304750057	NBU 666-24E	1043' FSL 1722' FEL	T10S-R20E-24-SWSE
ML22790	4304750012	NBU 667-24E	660' FSL 660' FEL	T10S-R20E-24-SESE
UTUO2270A	4304739901	NBU 668-12E	859' FNL 1915' FEL	T10S-R20E-12-NWNE
UO1207 ST	4304740084	NBU 670-29E	2018' FSL 859' FEL	T09S-R22E-29-NESE
UO1207 ST	4304750027	NBU 691-29E	680' FNL 797' FEL	T09S-R22E-29-NENE
ML3140.5	4304738330	NBU 760-36E	1320' FNL 1320' FEL	T09S-R20E-36-NENE
UTU4476	4304738632	NBU 762-26E	1506' FNL 1449' FEL	T10S-R20E-26-SWNE
ML22792	4304738332	NBU 763-19E	1258' FSL 1388' FEL	T10S-R21E-19-SWSE
ML3142	4304738331	NBU 764-32E	875' FNL 667' FWL	T09S-R21E-32-NWNW
UTUO1791	4304738633	NBU 765-09E	1000' FSL 1640' FWL	T10S-R21E-09-SESW

RECEIVED

DEC 24 2009

DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>		<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> U-01393-B
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>
		<b>7. UNIT or CA AGREEMENT NAME:</b> NATURAL BUTTES
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> NBU 326-4E	
<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	<b>9. API NUMBER:</b> 43047336970000	
<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6515 Ext	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1906 FNL 0695 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SWNW Section: 04 Township: 10.0S Range: 21.0E Meridian: S	<b>COUNTY:</b> UINTAH	
		<b>STATE:</b> UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
<b>TYPE OF SUBMISSION</b>	<b>TYPE OF ACTION</b>	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:  <input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 7/5/2011  <input type="checkbox"/> SPUD REPORT Date of Spud:  <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input checked="" type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	
<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>		
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.		
THE SUBJECT WELL WAS RETURNED TO PRODUCTION ON 07/05/2011.		
<b>Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY</b>		
<b>NAME (PLEASE PRINT)</b> Sheila Wopsock	<b>PHONE NUMBER</b> 435 781-7024	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A	<b>DATE</b> 7/15/2011	

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		<b>FORM 9</b>
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>		<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> U-01393-B
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>
		<b>7. UNIT or CA AGREEMENT NAME:</b> NATURAL BUTTES
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> NBU 326-4E	
<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	<b>9. API NUMBER:</b> 43047336970000	
<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6515 Ext	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES
<b>4. LOCATION OF WELL FOOTAGES AT SURFACE:</b> 1906 FNL 0695 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SWNW Section: 04 Township: 10.0S Range: 21.0E Meridian: S	<b>COUNTY:</b> UINTAH	
	<b>STATE:</b> UTAH	
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
<b>TYPE OF SUBMISSION</b>	<b>TYPE OF ACTION</b>	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:  <input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 11/17/2011  <input type="checkbox"/> SPUD REPORT Date of Spud:  <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input checked="" type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> WILDCAT WELL DETERMINATION <input type="checkbox"/> OTHER	
<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>		
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.		
THE SUBJECT WELL WAS RETURNED BACK TO PRODUCTION ON 11/17/2011.		
<p><b>Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY</b></p>		
<b>NAME (PLEASE PRINT)</b> Sheila Wopsock	<b>PHONE NUMBER</b> 435 781-7024	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A	<b>DATE</b> 12/5/2011	

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9  5. LEASE DESIGNATION AND SERIAL NUMBER: U-01393-B
---	--

<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:  7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
--	--

1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: NBU 326-4E
-----------------------------	--

2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.	9. API NUMBER: 43047336970000
--	----------------------------------

3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	PHONE NUMBER: 720 929-6100	9. FIELD and POOL or WILDCAT: NATURAL BUTTES
--	-------------------------------	---

4. LOCATION OF WELL FOOTAGES AT SURFACE: 1906 FNL 0695 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNW Section: 04 Township: 10.0S Range: 21.0E Meridian: S	COUNTY: UINTAH  STATE: UTAH
--	---

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 3/11/2014  <input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:  <input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:  <input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input checked="" type="checkbox"/> <b>PLUG AND ABANDON</b> <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The operator requests authorization to plug and abandon the subject well location. Attached in the plug and abandonment procedure.

**Accepted by the  
 Utah Division of  
 Oil, Gas and Mining**

Date: March 11, 2014

By: *Derek Quist*

NAME (PLEASE PRINT) Teena Paulo	PHONE NUMBER 720 929-6236	TITLE Staff Regulatory Specialist
SIGNATURE N/A		DATE 3/11/2014

**NBU 326-4E**  
**1906' FNL & 695' FWL**  
**SWNW SEC.4, T10S, R21E**  
**Uintah County, UT**

**KBE:** 5012'  
**GLE:** 4998'  
**TD:** 6235'  
**PBTD:** 6222'

**API NUMBER:** 4304733697  
**LEASE NUMBER:** U-01393-B

**CASING :** 12.25" hole  
 8.625" 24# J-55 @ 243' (GL)  
 TOC @ Surface

7.875" hole  
 4.5" 10.5# J-55 @ 6235'  
 TOC @ ~1060' per CBL

**PERFORATIONS:** Wasatch 5806' - 6062'

**TUBING:** 2 3/8" 4.7# J-55 Tbg landed at 4048' (WOV rpt dated 8/11/2011)

Tubular/Borehole	Drift inches	Collapse psi	Burst psi	Capacities		
				Gal./ft.	Cuft/ft.	Bbl./ft.
2.375" 4.7# J-55 tbg.	1.901	8100	7700	0.1624	0.02171	0.00387
4.5" 10.5# J-55	3.833	5720		0.6699	0.0895	0.0159
8.625" 24# J-55	8.097	1370	2950	2.6749	0.3537	0.0636
Annular Capacities						
2.3/8" tbg. X 4 1/2" csg				0.4226	0.0565	0.01
4.5" csg X 8 5/8" 24# csg				1.8487	0.2471	0.044
4.5" csg X 7.7/8 borehole				1.704	0.2278	0.0406
8.5/8" csg X 12 1/4" borehole				3.0874	0.4127	0.0735

**GEOLOGIC INFORMATION:**

Formation	Depth to top, ft.
Uinta	Surface
Green River	1500'
Bird's Nest	1688'
Mahogany	2068'
Base of Parachute	2960'
Wasatch	4703'

**Tech. Pub. #92 Base of USDW's**

USDW Elevation ~800' MSL  
 USDW Depth ~4212' KBE

## NBU 326-4E PLUG & ABANDONMENT PROCEDURE

### GENERAL

- H<sub>2</sub>S MAY BE PRESENT. CHECK FOR H<sub>2</sub>S AND TAKE APPROPRIATE PRECAUTIONS.
- CEMENT QUANTITIES BELOW ASSUME NEAT CLASS G, YIELD 1.145 CUFT./SX. IF A DIFFERENT PRODUCT IS USED, WELLSITE PERSONNEL ARE RESPONSIBLE FOR CORRECTING QUANTITIES TO YIELD THE STATED SLURRY VOLUME. WHEN SQUEEZING, INCLUDE 10% EXCESS PER 1000' OF DEPTH.
- TREATED FRESH WATER WILL BE PLACED BETWEEN ALL PLUGS INSTEAD OF BRINE.
- ALL DISPLACEMENT FLUID SHALL CONTAIN CORROSION INHIBITOR AND BIOCIDES. PREMIX 5 GALLONS PER 100 BBLS FLUID.
- NOTIFY BLM 24 HOURS BEFORE MOVING ON LOCATION.
- A GPS READING WILL NEED TO BE TAKEN AT THE WELL SITE AND RECORDED IN OPENWELLS. PLEASE TAKE IT TO THE 6TH DECIMAL PLACE.

### PROCEDURE

Note: Estimated 232 sx Class "G" cement needed for procedure. (1) 4.5" CIBP.

Note: No Gyro on record for this well.

1. MIRU. KILL WELL AS NEEDED. ND WH, NU AND TEST BOPE.
2. PULL TBG & LD SAME. RU WIRELINE AND MAKE A GAUGE RING RUN TO CHECK FOR FILL. A GPS READING WILL NEED TO BE TAKEN AT THE WELL SITE AND RECORDED IN OPENWELLS. PLEASE TAKE IT TO THE 6TH DECIMAL PLACE.
3. RU WIRELINE & GYRO SURVEY.
4. **PLUG #1, ISOLATE WAS PERFORATIONS (5806' - 6062')**: RIH W/ 4 ½" CIBP. SET @ ~5750'. RELEASE CIBP, PUH 10', BRK CIRC W/ FRESH WATER. RELEASE CIBP, PUH 10', BRK CIRC W/ FRESH WATER. DISPLACE A MINIMUM OF **8 SX / 1.6 BBL / 9.0 CUFT.** ON TOP OF PLUG. PUH ABOVE TOC (~5650'). REVERSE CIRCULATE W/ TREATED WATER (13.4 BBLS).
5. **PLUG #2, PROTECT TOP OF WASATCH (4703') & BASE OF USDW (~4212')**: PUH TO ~4810'. BRK CIRC W/ FRESH WATER. DISPLACE **55.5 SX / 11.3 BBL / 63.6 CUFT.** AND BALANCE PLUG W/ TOC @ ~4100' (710' COVERAGE). PUH ABOVE TOC. REVERSE CIRCULATE W/ TREATED WATER (16.4 BBLS).
6. **PLUG #3, PROTECT BASE OF PARACHUTE (~2960')**: PUH TO ~3070'. BRK CIRC W/ FRESH WATER. DISPLACE **17 SX / 3.5 BBL / 19.7 CUFT.** AND BALANCE PLUG W/ TOC @ ~2850' (220' COVERAGE). PUH ABOVE TOC. REVERSE CIRCULATE W/ TREATED WATER (10.7 BBLS). POOH.
7. **PLUG #5, PROTECT TOP OF MAHOGANY (2068'), TOP OF BIRD'S NEST (~1688'), AND TOP OF GREEN RIVER (1500')**: PUH TO ~2180'. BRK CIRC W/ FRESH WATER. DISPLACE **61 SX / 12.4 BBL / 69.8 CUFT.** AND BALANCE PLUG W/ TOC @ ~1400' (780' COVERAGE). PUH ABOVE TOC. REVERSE CIRCULATE W/ TREATED WATER (22.3 BBLS). POOH.
8. **PLUG #7, PROTECT SURFACE CSG SHOE (257' KB), FILL SURFACE HOLE & ANNULUS**: POOH. RIH W/ WIRELINE, PERFORATE @ 310' W/ 4 SPF. POOH W/ WIRELINE. RU CEMENT SERVICE TO PROD CSG. PUMP **90 SX / 18.4 BBL / 103.3 CUFT.** OR SUFFICIENT VOLUME TO FILL ANNULUS AND CASING TO SURFACE.
9. CUT OFF WELLHEAD AND INSTALL MARKER PER REGULATIONS.
10. RDMO. TURN OVER TO OPERATIONS FOR SURFACE REHAB. SURFACE RECLAMATION TO BE PERFORMED IN ACCORDANCE TO REGULATIONS.

ALM 3/6/14

RECEIVED: Mar. 11, 2014




APC 206 2/01

PROJECT COMPUTATIONS

NO. \_\_\_\_\_ OF \_\_\_\_\_ SHEETS

DATE \_\_\_\_\_ PROJECT NBU 321e-4E JOB NO. \_\_\_\_\_

BY \_\_\_\_\_ CHK.: \_\_\_\_\_ SUBJECT \_\_\_\_\_

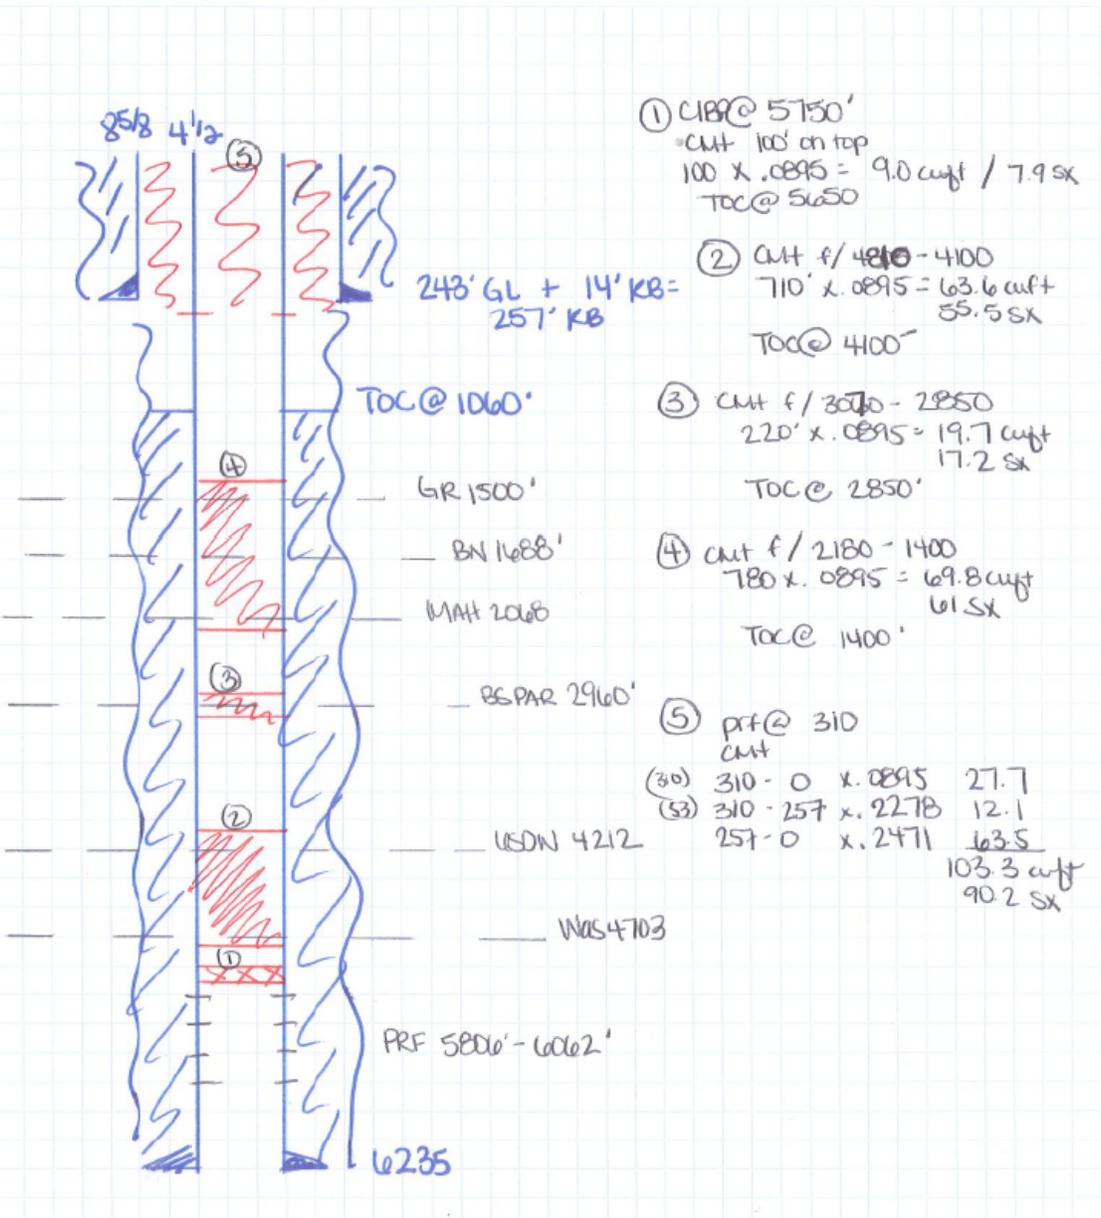

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>		<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> U-01393-B
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>
		<b>7. UNIT or CA AGREEMENT NAME:</b> NATURAL BUTTES
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> NBU 326-4E	
<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	<b>9. API NUMBER:</b> 43047336970000	
<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6100	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1906 FNL 0695 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SWNW Section: 04 Township: 10.0S Range: 21.0E Meridian: S	<b>COUNTY:</b> UINTAH	
	<b>STATE:</b> UTAH	
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
<b>TYPE OF SUBMISSION</b>	<b>TYPE OF ACTION</b>	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:  <input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 9/29/2014  <input type="checkbox"/> SPUD REPORT Date of Spud:  <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> OPERATOR CHANGE <input checked="" type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> WILDCAT WELL DETERMINATION <input type="checkbox"/> OTHER	
<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>		
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. KERR MCGEE REQUESTS THAT THIS WELL BE PLUG AND ABANDONED. PLEASE SEE P&A PROCEDURE ATTACHED. THANK YOU.		
<b>Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY October 01, 2014</b>		
<b>NAME (PLEASE PRINT)</b> Kay E. Kelly	<b>PHONE NUMBER</b> 720 929 6582	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A	<b>DATE</b> 9/29/2014	

US ROCKIES REGION  
Operation Summary Report

US ROCKIES REGION								
Operation Summary Report								
Well: NBU 326-4E					Spud Date:			
Project: UTAH-UINTAH			Site: NBU 326-4E			Rig Name No: GWS 1/1		
Event: ABANDONMENT			Start Date: 7/23/2014		End Date: 9/10/2014			
Active Datum: RKB @0.00usft (above Mean Sea Level)				UWI: NBU 326-4E				
Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
9/8/2014	7:00 - 7:15	0.25	ABANDP	48		P		HSM, RIGGING UP
	7:15 - 9:00	1.75	ABANDP	30	A	P		MIRU, SPOT EQUIP, WELL DEAD, N/D WELLHEAD, N/U BOPS, R/U TBG EQUIP
	9:00 - 11:00	2.00	ABANDP	31	I	P		MIRU SCAN TECH, SCAN OUT OT HOLE W/ 128 JNTS J-55 YELLOW BAND TBG. R/D SCAN TECH.
	11:00 - 16:00	5.00	ABANDP	46	E	S		WAIT TO RUN GYRO
	16:00 - 18:00	2.00	ABANDP	35	E	P		MIRU, RIH W/ GYRO TOOLS STACKED OUT @=4,068' RUN GYRO TO SURFACE R/D SWIFN.
9/9/2014	7:00 - 7:15	0.25	ABANDP	48		P		HSM, USING AIR FOAM
	7:15 - 9:00	1.75	ABANDP	44	D	P		SICP=150#, BLOW WELL DOWN, P/U 3-3/4 MILL RIH W/ 129 JNTS 2-3/8 J-55 TBG, TAG @=4,068', P/U POWER SWIVEL
	9:00 - 9:30	0.50	ABANDP	31	H	P		BREAK CIRC W/ AIR FOAM
	9:30 - 15:30	6.00	ABANDP	31	H	P		C/O FROM 4,068' TO 4,285' COULD NOT MAKE ANYMORE HOLE, TALKED W/ BLM [BRANDON] OK TO POOH AND SET PLUG. CIRC WELL CLEAN, R/D PWR SWVL, POOH W/ TBG AND MILL.
	15:30 - 16:30	1.00	ABANDP	34	I	P		MIRU CUTTERS WIRE LINE, P/U RIH W/ CIBP, TAGGED @=4,281' PULL UP SET CIBP @=4,276' POOH R/ WIRE LINE.
	16:30 - 18:30	2.00	ABANDP	31	I	P		P/U NOTCHED COLLAR RIH W/ 134 JNTS 2-3/8 PRESSURE TEST CIBP TO 600# GOOD TEST SWIFN
9/10/2014	7:00 - 7:15	0.25	ABANDP	48		P		HSM, LAYING DOWN TBG
	7:15 - 17:00	9.75	ABANDP	51	D	P		MIRU PRO PETRO, SPOT 24 SX CLASS G ON TOP OF PLUG @=4,276' PLUG #2] L/D 37 JNTS, EOT @=3,055' PUMP 17 SX CLASS G CEMENT, TOP OF CEMENT 2,835' PLUG #3] L/D 28 JNTS, EOT @=2,173" PUMP 61 SX CLASS G CEMENT, TOP OF CEMENT @=1,393' PLUG #4] FINISH LAYING DOWN TBG, MIRU CUTTERS, P/U RIH W/ PERF GUN SHOOT HOLES BELOW SURFACE @=310', CIRC TO SURFACE, TOOK 3 HOURS TO GET CEMENT TO STAY AT SURFACE. CUT WELL HEAD OFFTOPPED OFF W/ CEMENT WELDED MARKER ON .  LAT. 39.979425 LONG. -109.564479