

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		CONFIDENTIAL	5. Lease Serial No. U-28652
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone			6. If Indian, Allottee or Tribe Name
2. Name of Operator COASTAL OIL & GAS CORPORATION		Contact: CHERYL CAMERON E-Mail: Cheryl.Cameron@CoastalCorp.com	7. If Unit or CA Agreement, Name and No.
3a. Address P.O. BOX 1148 VERNAL, UT 84078	3b. Phone No. (include area code) Ph: 435.781.7023 Fx: 435.789.4436	9. API Well No. 43-047-34092	8. Lease Name and Well No. GLEN BENCH FEDERAL 22-2
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface NWSW 1980FSL 660FWL 4440609 N At proposed prod. zone 633609 E		10. Field and Pool, or Exploratory GLEN BENCH FIELD	
14. Distance in miles and direction from nearest town or post office* 32.2 MILES SOUTHWEST OF VERNAL, UTAH		12. County or Parish UINTAH	13. State UT
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 660	16. No. of Acres in Lease 1920.00	17. Spacing Unit dedicated to this well 40.00	
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. REFER TO TOPO C	19. Proposed Depth 11100 MD	20. BLM/BIA Bond No. on file U-605382-9	
21. Elevations (Show whether DF, KB, RT, GL, etc.) 5004 GL	22. Approximate date work will start	23. Estimated duration	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|--|--|
| <ul style="list-style-type: none"> 1. Well plat certified by a registered surveyor. 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | <ul style="list-style-type: none"> 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification 6. Such other site specific information and/or plans as may be required by the authorized officer. |
|--|--|

25. Signature 	Name (Printed/Typed) CHERYL CAMERON	Date 05/18/2001
Title OPERATIONS	Federal Approval of this Action is Necessary	
Approved by (Signature) 		
Title	Office RECLAMATION SPECIALIST III	

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #4272 verified by the BLM Well Information System
For COASTAL OIL & GAS CORPORATION, sent to the Vernal



T8S, R22E, S.L.B.&M.

COASTAL OIL & GAS CORP.

Well location, GLEN BENCH FEDERAL #22-2, located as shown in the NW 1/4 SW 1/4 of Section 22, T8S, R22E, S.L.B.&M., Uintah County, Utah.


BASIS OF ELEVATION

SPOT ELEVATION AT THE SOUTHWEST CORNER OF SECTION 22, T8S, R22E, S.L.B.&M. TAKEN FROM THE RED WASH SW QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4980 FEET.

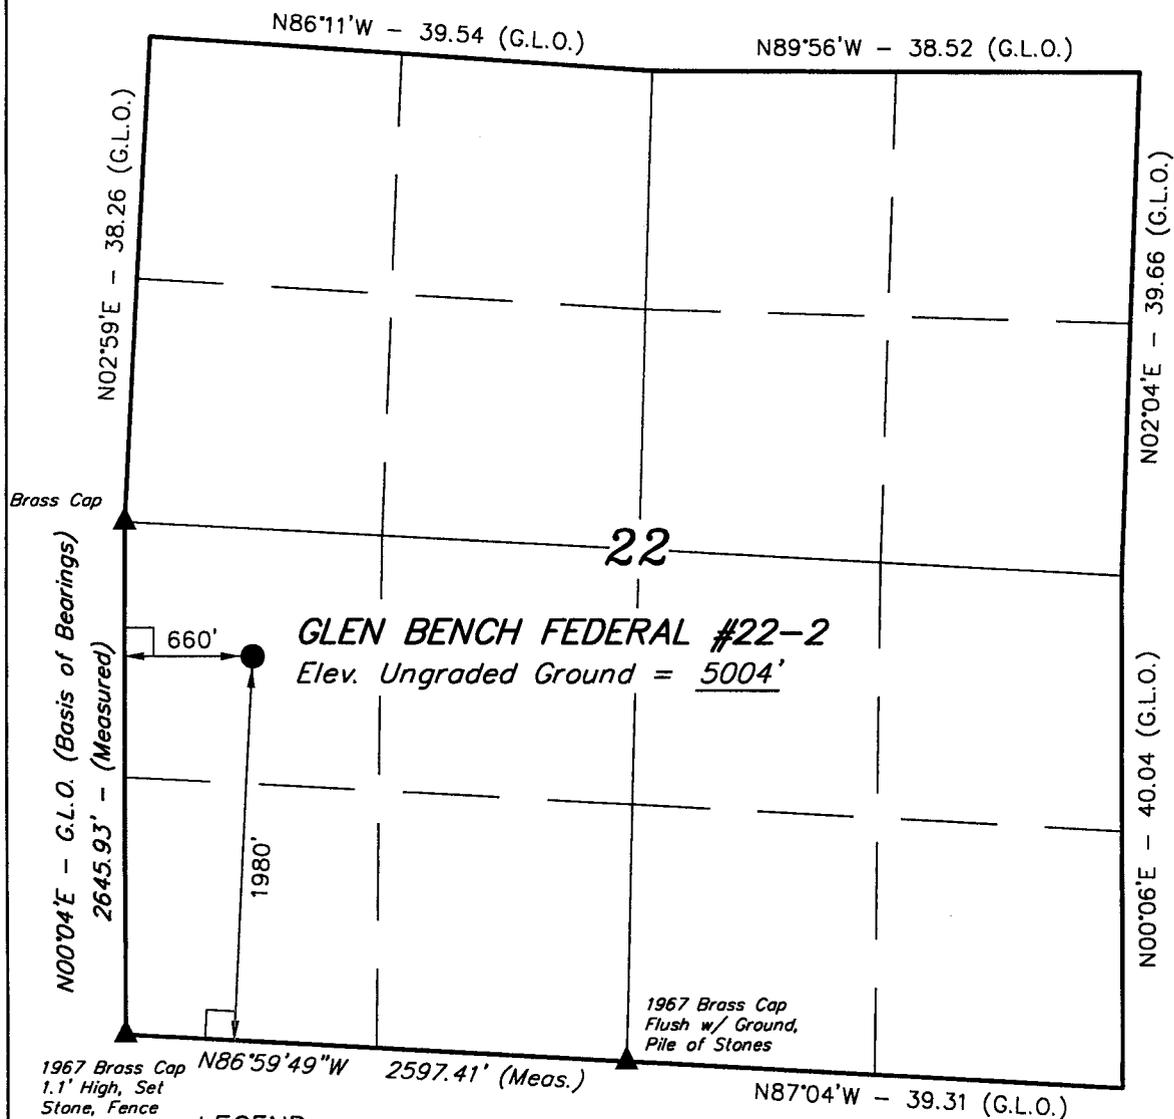

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME, OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

LATITUDE = 40°06'26"
LONGITUDE = 109°25'58"

UINTAH ENGINEERING & LAND SURVEYING
85 SOUTH 200 EAST - VERNAL, UTAH 84078
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 11-17-00	DATE DRAWN: 11-18-00
PARTY D.K. W.W. D.R.B.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE COASTAL OIL & GAS CORP.	



May 21, 2001

Ms. Lisha Cordova
State of Utah
Division of Oil Gas & Mining
1594 West North Temple, Suite 1210
Salt Lake City, Utah 84114
Attn: Lisha Cordova

**RE: Glen Bench Federal #22-2, Sec. 22-T8S-R22E
Glen Bench Federal #22-3, Sec. 22-T8S-R22E
Glen Bench Federal #21-2, Sec. 21-T8S-R22E**

Dear Ms. Cordova:

Enclosed is the APD's for the locations listed above. Please do not hesitate to call me if you have any questions, or need additional information at (435) 781-7021.

Sincerely,

Holly Miner
Regulatory Assistant

RECEIVED
MAY 27 2001
DIVISION OF
OIL, GAS AND MINING

Coastal Oil & Gas Corporation

A SUBSIDIARY OF THE COASTAL CORPORATION
1368 S 1200 E • P.O. BOX 1148 • VERNAL UT 84078 • 435/789-4433 • FAX 435/789-4436

**GLEN BENCH FEDERAL #22-2
NW/SW Sec. 22-T8S, R22E
UINTAH COUNTY, UTAH
LEASE #U-28652**

**ONSHORE ORDER NO. 1
COASTAL OIL & GAS CORPORATION**

DRILLING PROGRAM

1. Estimated Tops of Important Geologic Markers:

<u>Formation</u>	<u>Depth</u>
KB	5015'
Uinta	at Surface
Green River	2275'
Wasatch	5675'
Mesaverde	8150'
TD	10600'

2. Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
Gas	Uinta	at Surface
Gas	Green River	2275'
Gas	Wasatch	6595'
Gas	Mesaverde	8150'
Water	N/A	
Other Minerals	N/A	

3. Pressure Control Equipment (Schematic Attached)

The BOP stack will consist of one 11" 3,000 psi annular BOP, one 11" 3,000 psi double ram, and one 11' drilling spool. The lower ram will contain pipe rams, and the upper ram will contain blind rams.

The choke and kill lines and the choke manifold will have a 3,000 psi minimum pressure rating.

The hydrill will be tested to 1,500 psi. The rams, choke manifold, kelly safety valves, drill string safety valves, and inside BOP will be tested to 2,000 psi.

4. Proposed Casing & Cementing Program:

Please see the attached Drilling Program.

5. **Drilling Fluids Program:**

Please see the attached Mud Program.

6. **Evaluation Program:**

Please see the attached Geological Data.

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure calculated at 10,600' TD, approximately equals 4,240 psi (calculated at 0.4 psi/foot).

Maximum anticipated surface pressure equals approximately 1,908 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

**GLEN BENCH FEDERAL #22-2
NW/SW Sec. 22, T8S-R22E
Uintah County, UT
U-28652**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

Refer to Topo Map A for directions to the location.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. Planned Access Roads:

Refer to Topo Map B for the location of the proposed access road.

The upgraded and new portions of the access road will be crowned and ditched with a running surface of 18 feet and a maximum disturbed width of 30 feet. Appropriate water control will be installed to control erosion.

The access road was centerline flagged during time of staking.

Surfacing material may be necessary, depending upon weather conditions.

Surface disturbance and vehicular traffic will be limited to the approved location and approved access route. Any additional area needed will be approved in advance.

3. Location of Existing Wells Within a 1-Mile Radius:

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities:

The following guidelines will apply if the well is productive.

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The required color is Desert Brown, Munsell standard color number 10 YR 6/3.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

The proposed pipeline leaves the location in a southwesterly direction for an approximate distance of 750'+/-. Coastal Oil & Gas Corporation intends to tie-into the existing 3" pipeline until such time that a 12" corridor can be installed. Refer to Topo D map.

5. Location and Type of Water Supply:

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec. 32, T4S, R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

6. Source of Construction Materials:

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

7. Methods of Handling Waste Materials:

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

Any produced water from the proposed well will be contained in a water tank and will then be hauled truck to one of the pre-approved disposal sites: RNI, Sec.5-T9S-R22E, NBU #159, Sec.35-T9S-R21E, Ace Oilfield, Sec.2-T6S-R20E, MC&MC, Sec.12-T6S-R19E., (Requests in lieu of filing Form 3160-5 after initial production).

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner will be used, it will be a minimum of 12 mil thick, with sufficient bedding used to cover any rocks (Felt & Straw). The liner will overlap the pit walls and be covered with dirt and/or to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

8. Ancillary Facilities:

None are anticipated.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s). Please see the attached diagram to describe rig orientation, parking areas, and access roads.

The reserve pit will be lined, and when the reserve pit is closed, the pit liner will be buried below plow depth.

All pits will be fenced according to the following minimum standards:

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

A culvert shall be installed at the Access Road entrance as discussed during the on-site inspection. The size of the culvert shall be determined by Uintah County prior to the construction of the access Road.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Location size may change prior to the drilling of the well due to the current rig availability. If the Proposed location is not large enough to accommodate the drilling rig, the location will be re-surveyed and a form 3160-5 will be submitted.

10. Plans for Reclamation of the Surface:

Producing Location:

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

If a plastic, nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

Dry Hole/Abandoned Location:

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations with the following seed mixture, as discussed during the on-site inspection:

Fourwing Salt Brush	4 lbs/acre
Indian Ricegrass	4 lbs/acre
Needle & Threadgrass	4 lbs/acre

11. **Surface Ownership:**

Bureau of Land Management
Vernal District Office
170 South 500 East
Vernal, Utah 84078
(435) 781-4400

12. **Other Information:**

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance.

The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

A Class III archaeological survey has been conducted by AERC. A copy of this report will be submitted when it becomes available.

13. **Lessee's or Operator's Representative & Certification:**

Cheryl Cameron
Sr. Regulatory Analyst
Coastal Oil & Gas Corporation
P.O. Box 1148
Vernal, UT 84078
(435) 781-7023

Darrell Molnar
Drilling Manager
Coastal Oil & Gas Corporation
9 Greenway Plaza, Suite 2775
Houston, TX 77046
(713) 418-4295

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Coastal Oil & Gas Corporation is considered to be the operator of the subject well. Coastal Oil & Gas Corporation agrees to be responsible under terms and conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by BLM Nationwide Bond #U-605382-9.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.


/s/ Cheryl Cameron 
Cheryl Cameron

5/15/01
Date

COASTAL OIL & GAS CORPORATION

DRILLING PROGRAM FOR APD

COMPANY NAME Coastal Oil & Gas Corporation DATE 5/9/01
 WELL NAME Federal # 22-2 TD 11,100
 FIELD Glen Bench COUNTY Uintah STATE Utah ELEVATION 5000 KB
 SURFACE LOCATION NW/SW, SEC.22, T8S, R22E BHL Straight Hole
 OBJECTIVE ZONE(S) Unita / Green River / Wasatch / Mesaverda
 ADDITIONAL INFO BLM, UTDGDM, TRI-COUNTY HEALTH DEPT, UINTAH COUNTY.

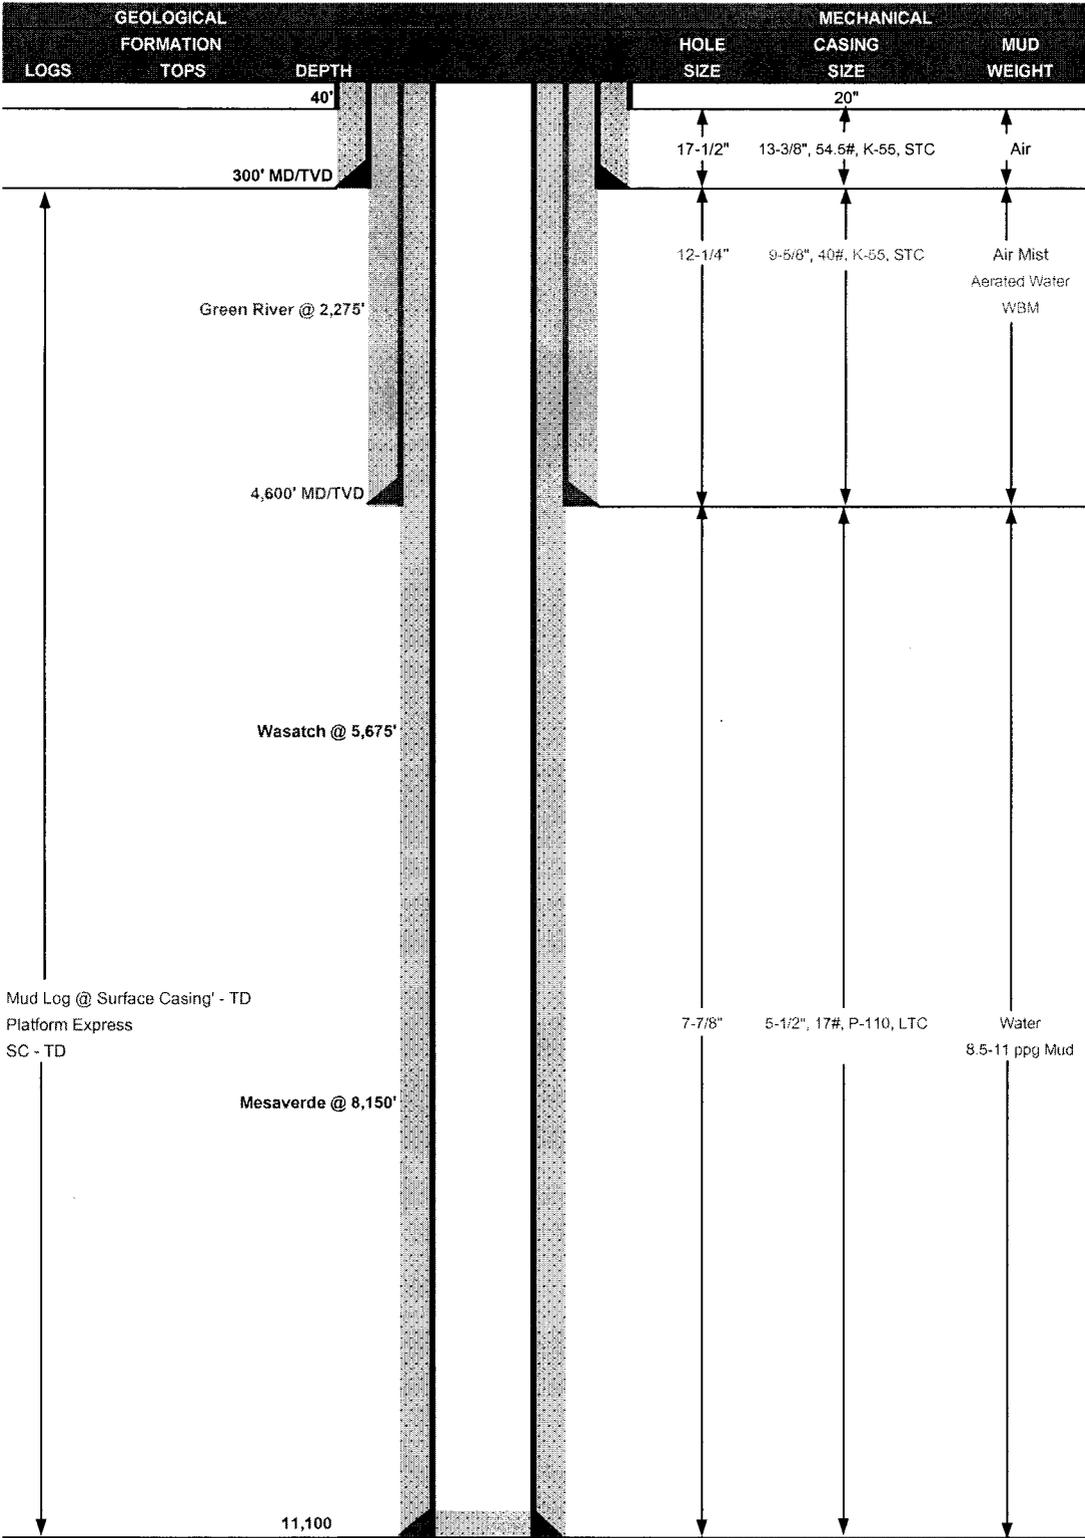

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	20"	0-40'				2730	1130	547000
SURFACE	13-3/8"	0-300'	54.5#	K-55	STC	16.22	8.05	8.24
INTERMEDIATE	9-5/8"	0-4,600'	40#	K-55	LTC	3,950	2,570	561,000
PRODUCTION	5-1/2"	0-TD	17#	P-110	LTC	1.15	1.19	1.98
						10640	7460	445000
						2.08	1.34	1.53

CEMENT PROGRAM


		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
		300	Class G + 2% CaCl ₂ + 0.25 lb/sk Cello Flake	270	35%	15.60	1.19
Intermediate	LEAD	4000	50/50/ Poz + 20% SSA-1 + 5% Silica Lite + 0.1% Versaset + 0.1 LWL + 1.5% Zonesealant	1100	30%	Foamed 10.0	1.47
	TAIL	600	50/50 Poz + 20% SSA-1 + SilicLite & 0.1% Verase + 0.1 LWL + 1.5% Zonesealant	180	30%	14.30	1.47
PRODUCTION	LEAD	5724	Premium Plus + 16% Gel + 2% FWCA + 0.6% Econolite + 10 lb/sk Gilsonite + 3% Salt + 1% HR7	194	60%	11.60	3.12
	TAIL	4876	50/50 Poz + 0.25 lb/sk Flocele + 2% Gel + 0.6% Halad 322 + 0.2% HR5 + 5% Salt + 2% Microbond HT + 0.2% Super CBL	1,255	75%	14.35	1.24

** or 15% over Caliper Log

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Float shoe, 1 jt, float collar. Centralize first 3 joints & every fourth joint to surface. Thread lock FE & casing up to & including box end of FC.
PRODUCTION	Float shoe, 2 jts, float collar. Centralize first 3 joints & every other joint across pay zones. Thread lock FE & casing up to & including box end of FC.

WELLHEAD EQUIPMENT

	TREE	2-1/16" 10M
	TUBING HEAD	11" 5M X 7-1/16" 10M
	CASING SPOOL	
	CASING SPOOL	13-3/8" 3M x 11" 5M
	CASING HEAD	13-3/8" SOW X 13-5/8" 3M

BIT PROGRAM

ROCK BIT & PDC BIT PROGRAM						
INTERVAL	HOLE	BIT MFG & MODEL	GPM	SERIAL	NZLS	COMMENTS
Surface Hole	17-1/2"	Various	Air			
Intermediate	12-1/4"	Various	Air			
SC - Top of Wasatch	7-7/8"	Various	450-350			
Wasatch	7-7/8"	Various (PDC)	450-350		0.5 TFA	
Mesaverde	7-7/8"	Various	400-300			

Test casing head to 750 psi after installing. Test surface casing to 1,000 psi prior to drilling out. Test int. csg. to 1,500 psi prior to drilling out. BOPE to intermediate: 13-5/8" 3M with one 3M annular and 2 rams. Test to 3,000 psi (annular to 1,500 psi) prior to drilling out. BOPE to TD: 11" 5M with one 5M annular and 2 rams. Test to 5,000 psi (annular to 3,000 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.

Run Totco survey every 500' from surface casing shoe to TD. Maximum allowable hole angle is 5 degrees.

GEOLOGICAL DATA

LOGGING:

Depth	Log Type
SC - 4600'	Platform Express w/DSI
4600 - TD	Platform Express w/DSI & FMI
Various	SWC's

MUD LOGGER: SC - TD
 SAMPLES: As per Geology
 CORING: SWC's at selective intervals.
 DST: As per Geology

MUD PROGRAM

DEPTH	TYPE	WATER			TREATMENT
		MUD WT	LOSS	VISCOSITY	
SC-300'	Air/Mist/ Aerated Water	NA	NA		KCL
300 - 4000	Water / Aerated water	NA	NA	NA	Polymer, Lime, LCM as needed
4000 - 4600	WBM	8.4 - 9.5	< 12 CC	34 - 45	LSND
4600' - TD	WBM	8.9 - 10.0+	< 10	30-45	LSND

ADDITIONAL INFORMATION



PROJECT ENGINEER: Ahmed Ismail DATE: _____

PROJECT MANAGER: Darrell Molnar DATE: _____

DRILLING SUPERINTENDENT: Larry Strasheim DATE: _____

3,000 PSI

BOP STACK

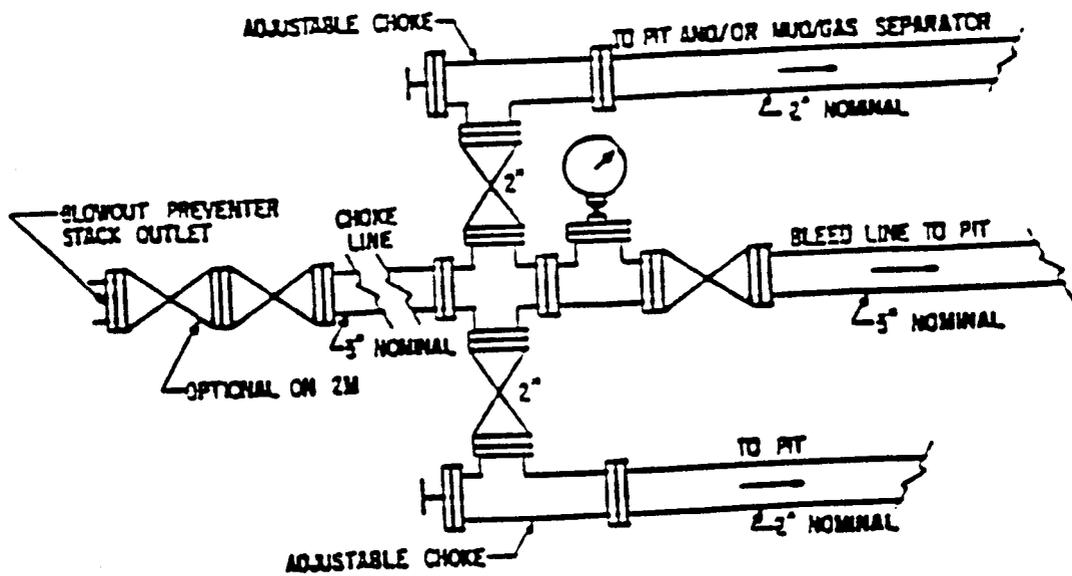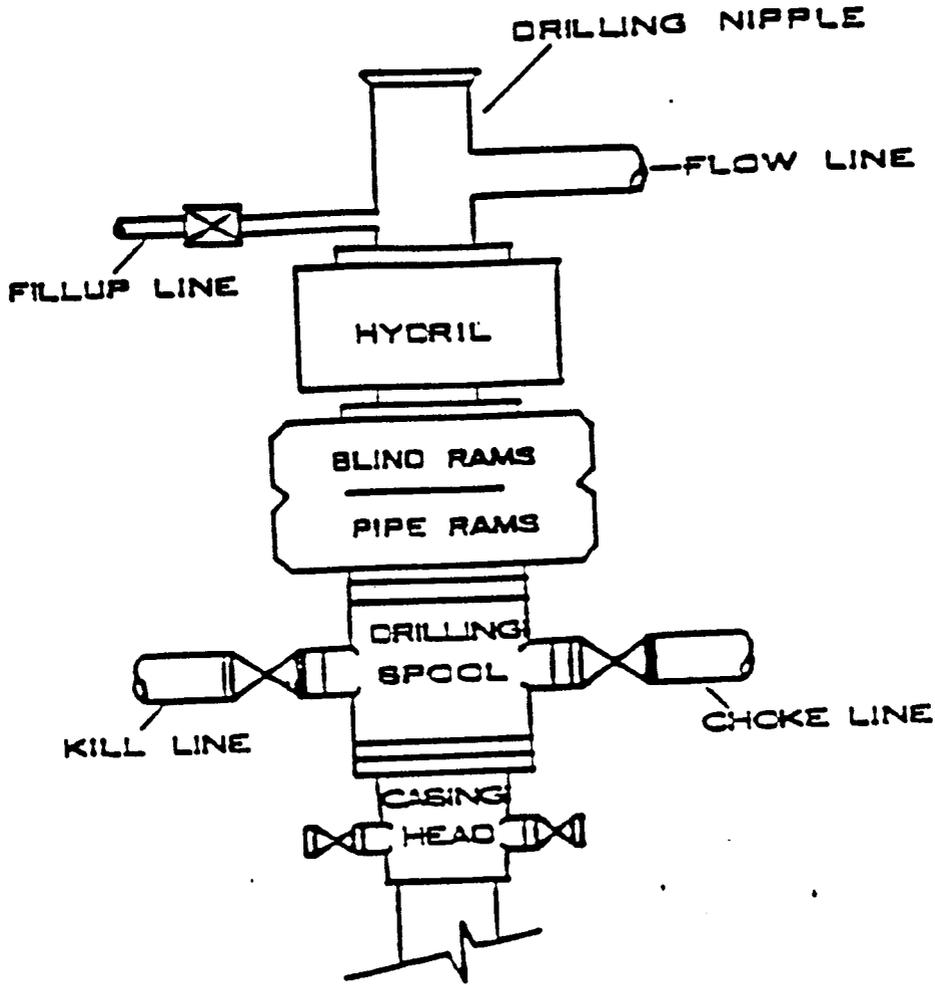






COASTAL OIL & GAS CORP.

FIGURE #2

TYPICAL CROSS SECTIONS FOR
 GLEN BENCH UNIT #22-2
 SECTION 22, T8S, R22E, S.L.B.&M.
 1980' FSL 660' FWL

1" = 20'
 X-Section
 Scale
 1" = 50'

DATE: 11-18-00
 Drawn By: D.R.B.

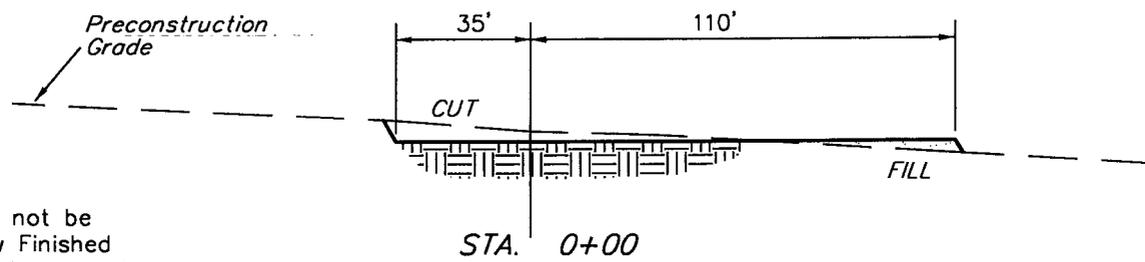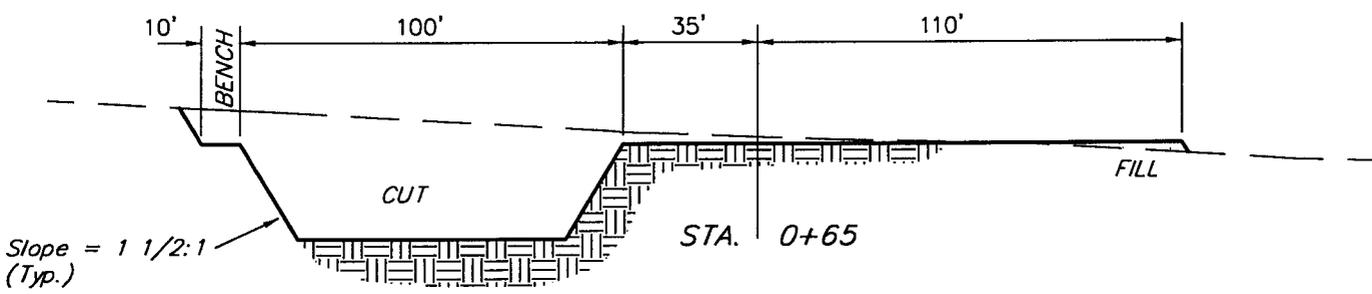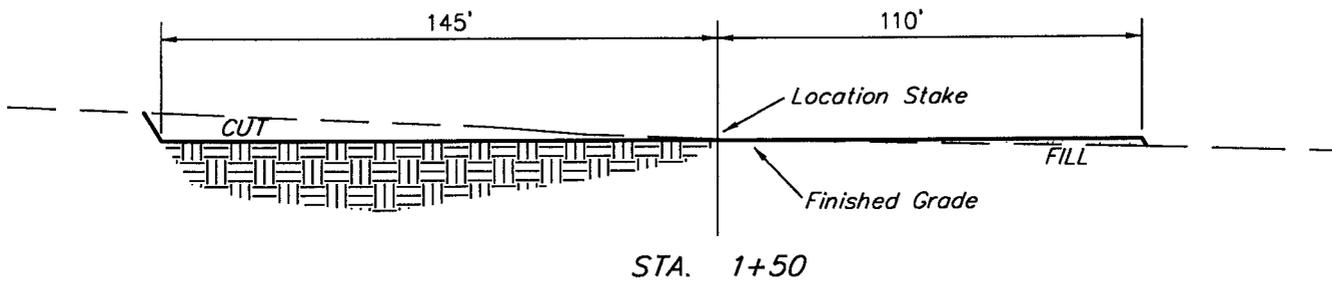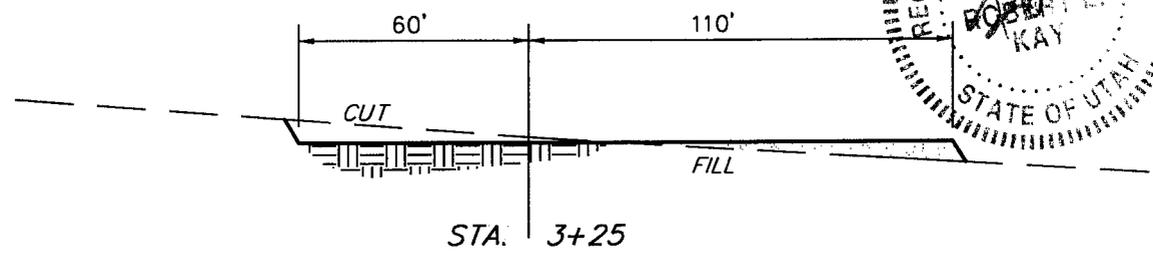

NOTE:
 Topsoil should not be Stripped Below Finished Grade on Substructure Area.



APPROXIMATE YARDAGES

CUT	
(12") Topsoil Stripping	= 1,200 Cu. Yds.
Remaining Location	= 3,950 Cu. Yds.
TOTAL CUT	= 5,150 CU.YDS.
FILL	= 1,090 CU.YDS.

EXCESS MATERIAL AFTER 5% COMPACTION	= 4,000 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 2,540 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 1,460 Cu. Yds.



3,000 PSI

BOP STACK

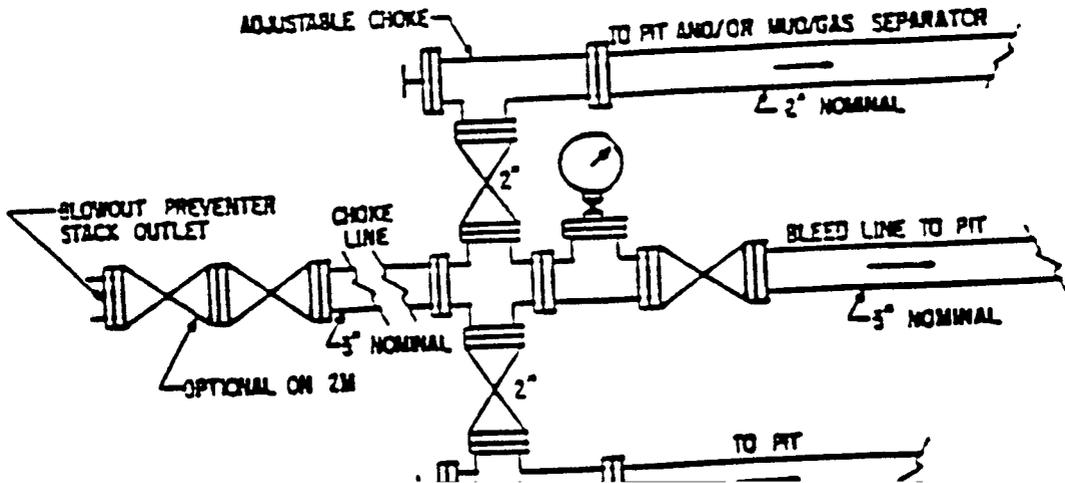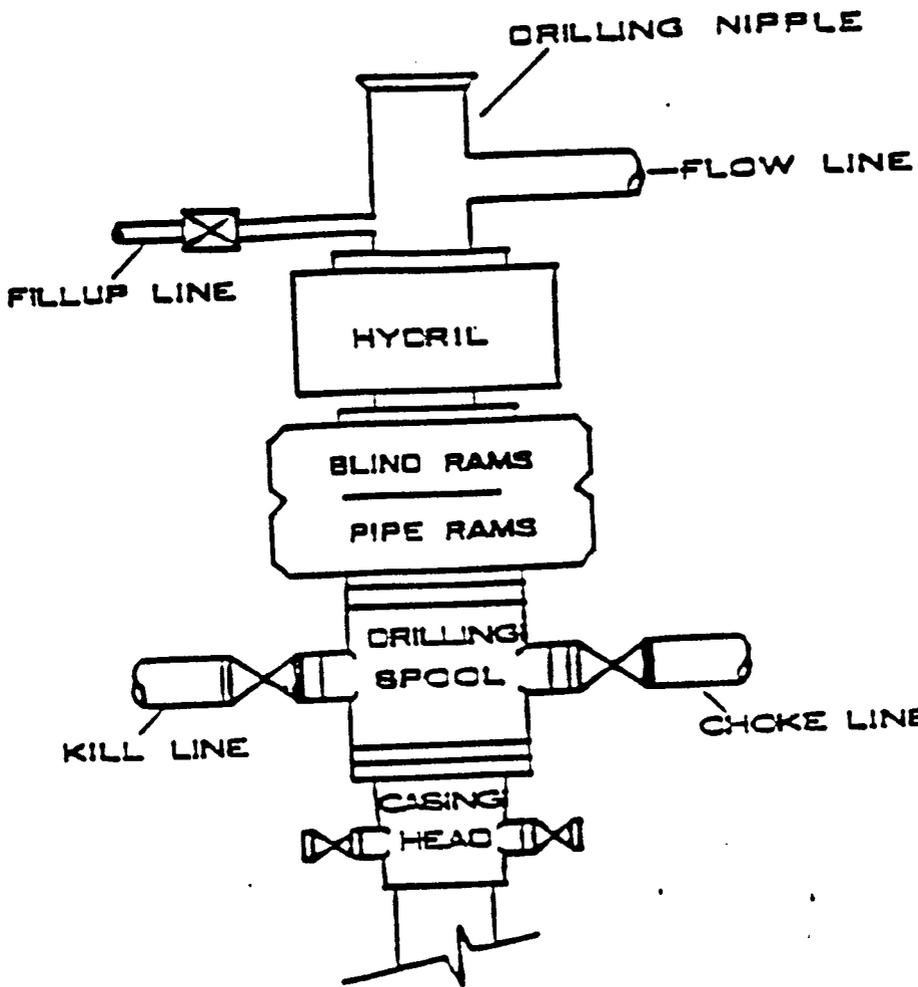

3,000 PSI


BOP STACK

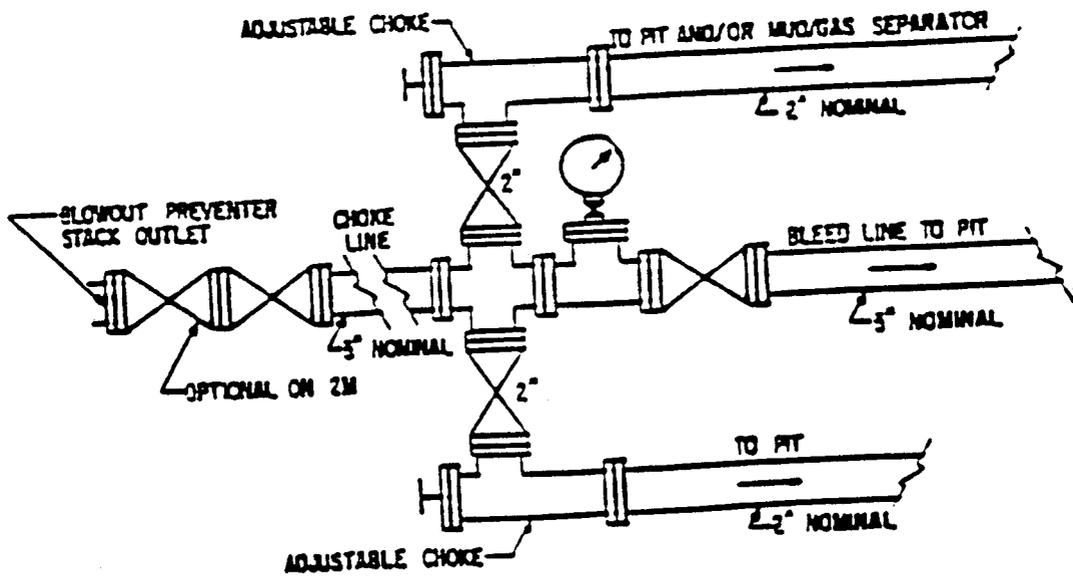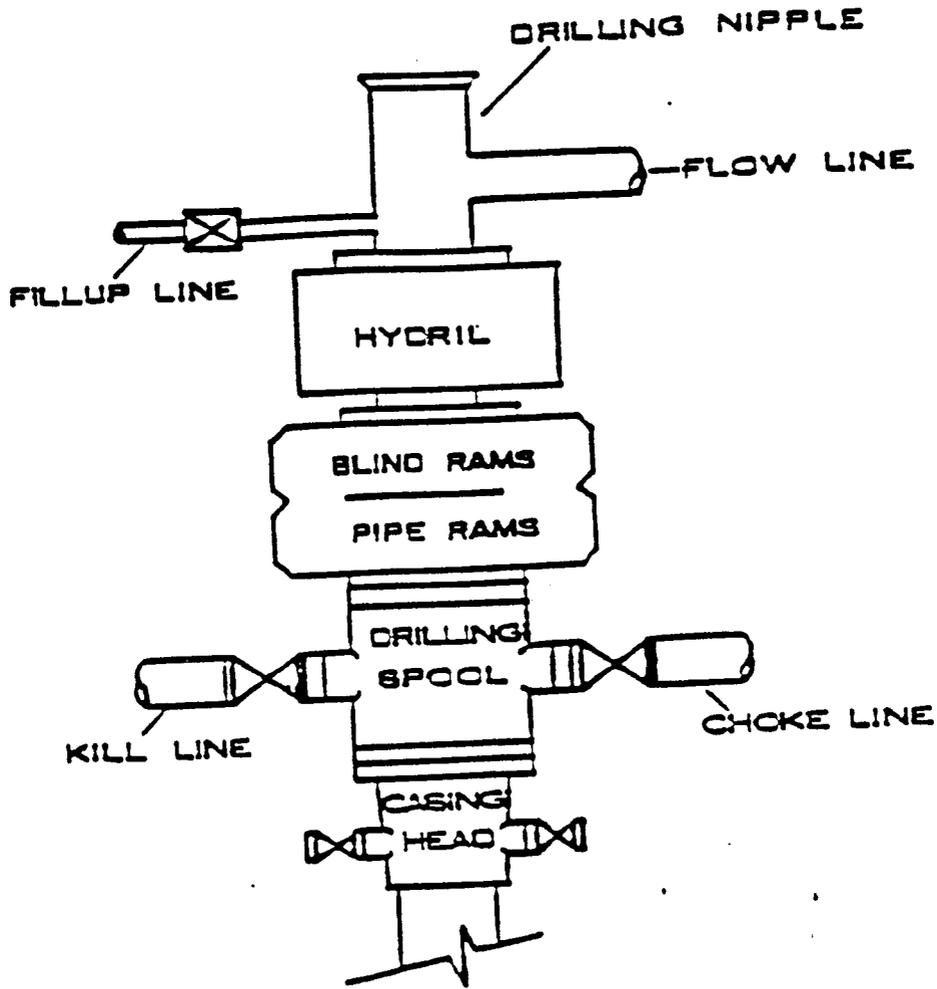



COASTAL OIL & GAS CORP.

FIGURE #1

LOCATION LAYOUT FOR
 GLEN BENCH UNIT #22-2
 SECTION 22, T8S, R22E, S.L.B.&M.
 1980' FSL 660' FWL




SCALE: 1" = 50'
 DATE: 11-18-00
 Drawn By: D.R.B.

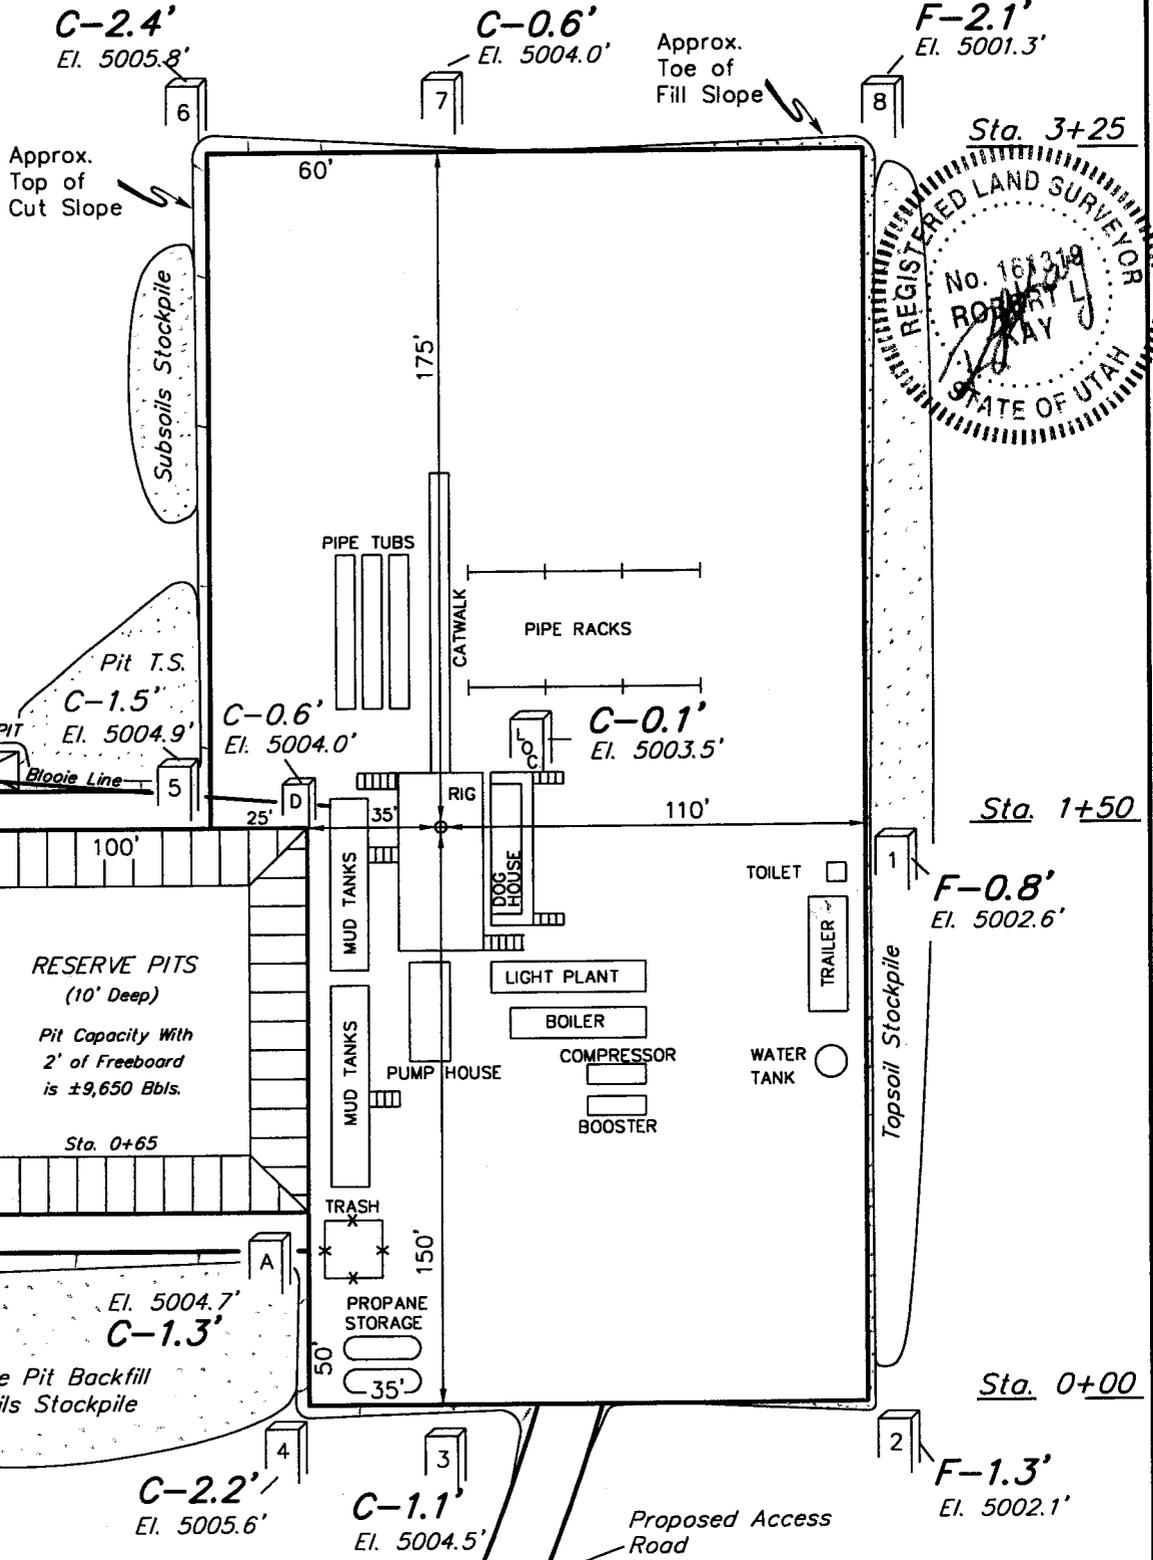

NOTE:
 Flare Pit is to be located a min. of 100' from the Well Head.

NOTES:

Elev. Ungraded Ground At Loc. Stake = 5003.5'
 FINISHED GRADE ELEV. AT LOC. STAKE = 5003.4'

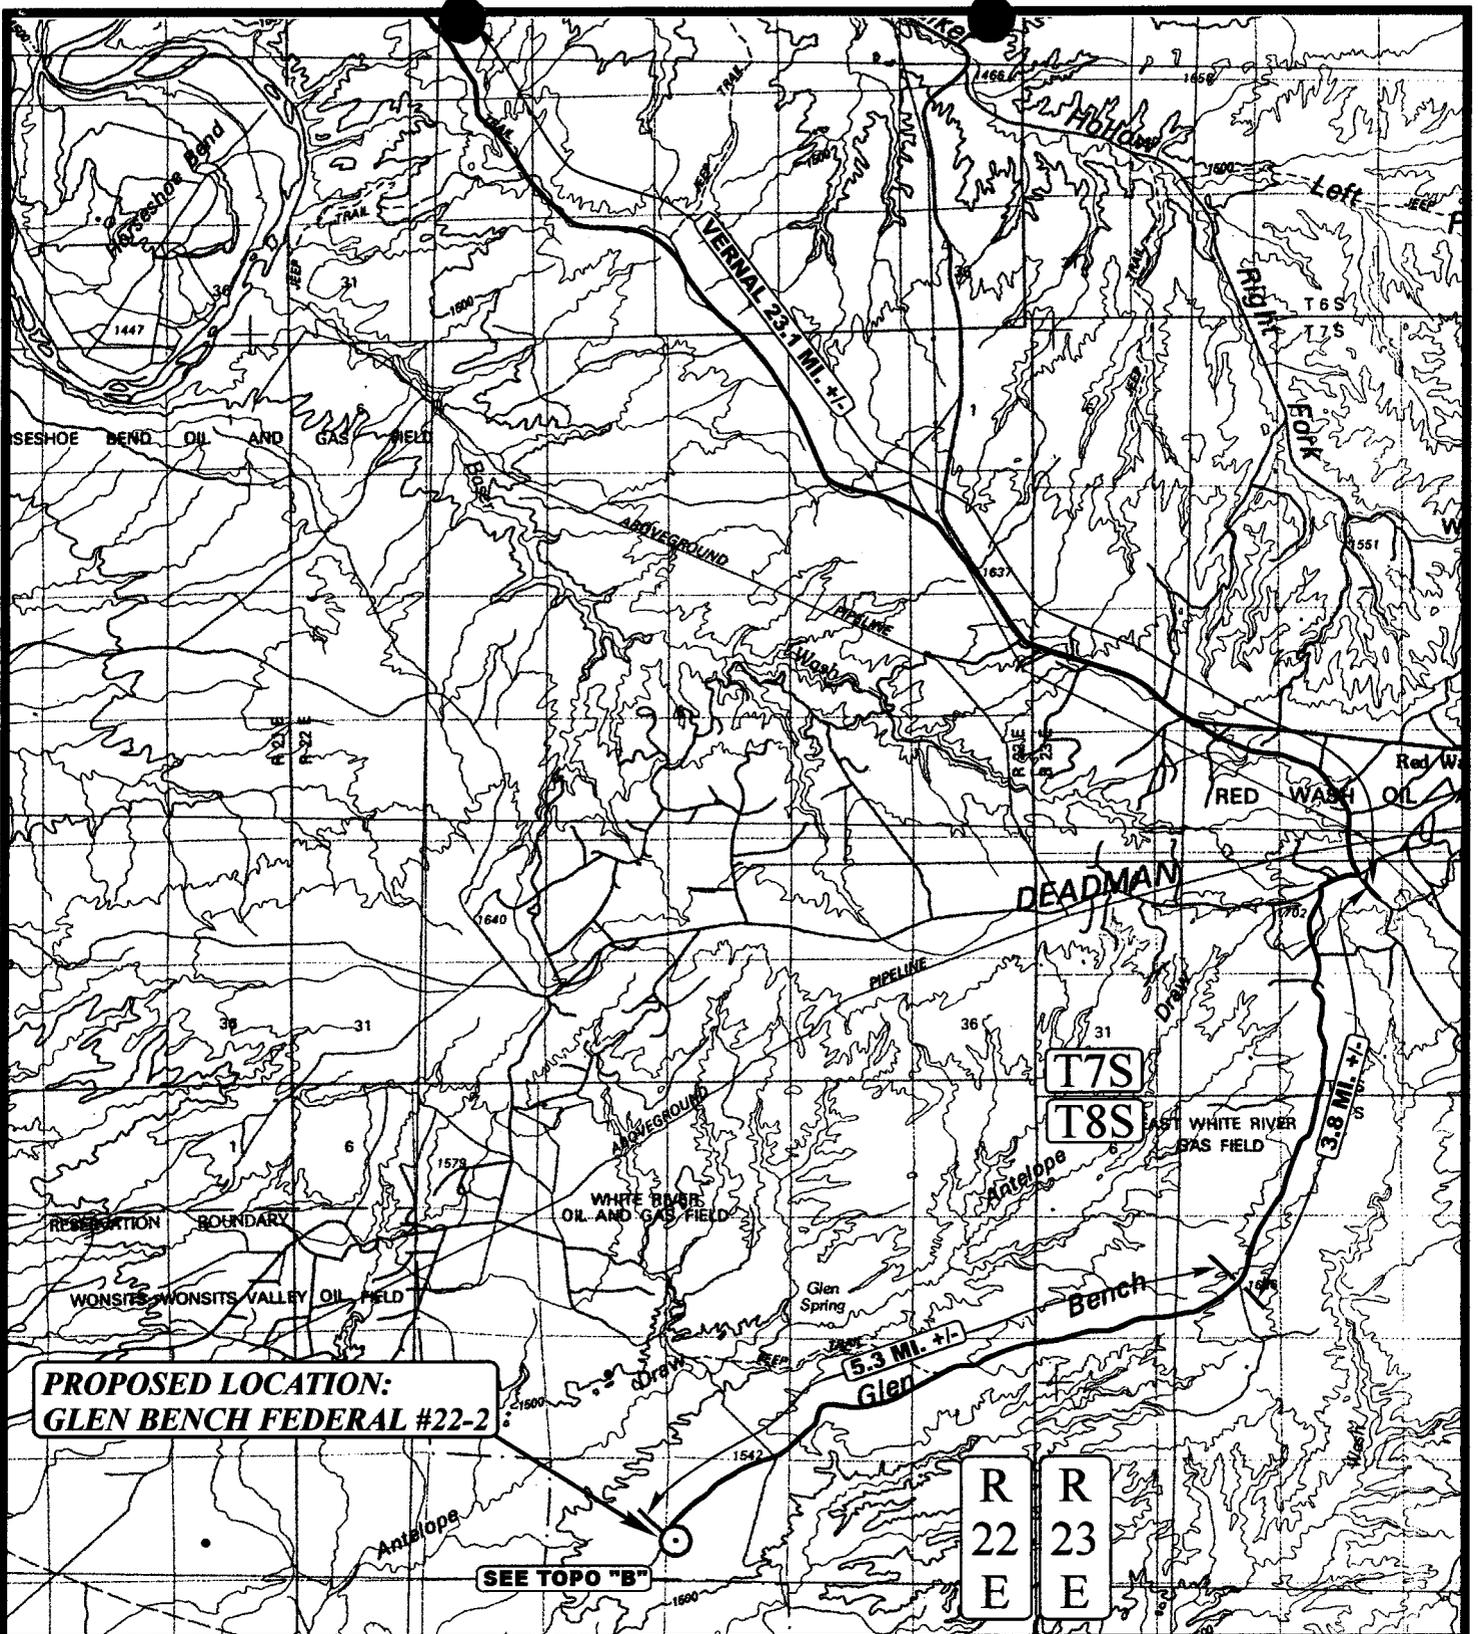

**PROPOSED LOCATION:
GLEN BENCH FEDERAL #22-2**

SEE TOPO "B"

LEGEND:

⊙ PROPOSED LOCATION

N



COASTAL OIL & GAS CORP.

**GLEN BENCH FEDERAL #22-2
SECTION 22, T8S, R22E, S.L.B.&M.
1980' FSL 660' FWL**




Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

11 28 00
MONTH DAY YEAR

SCALE: 1:100,000 DRAWN BY: K.G. REVISED: 00-00-00



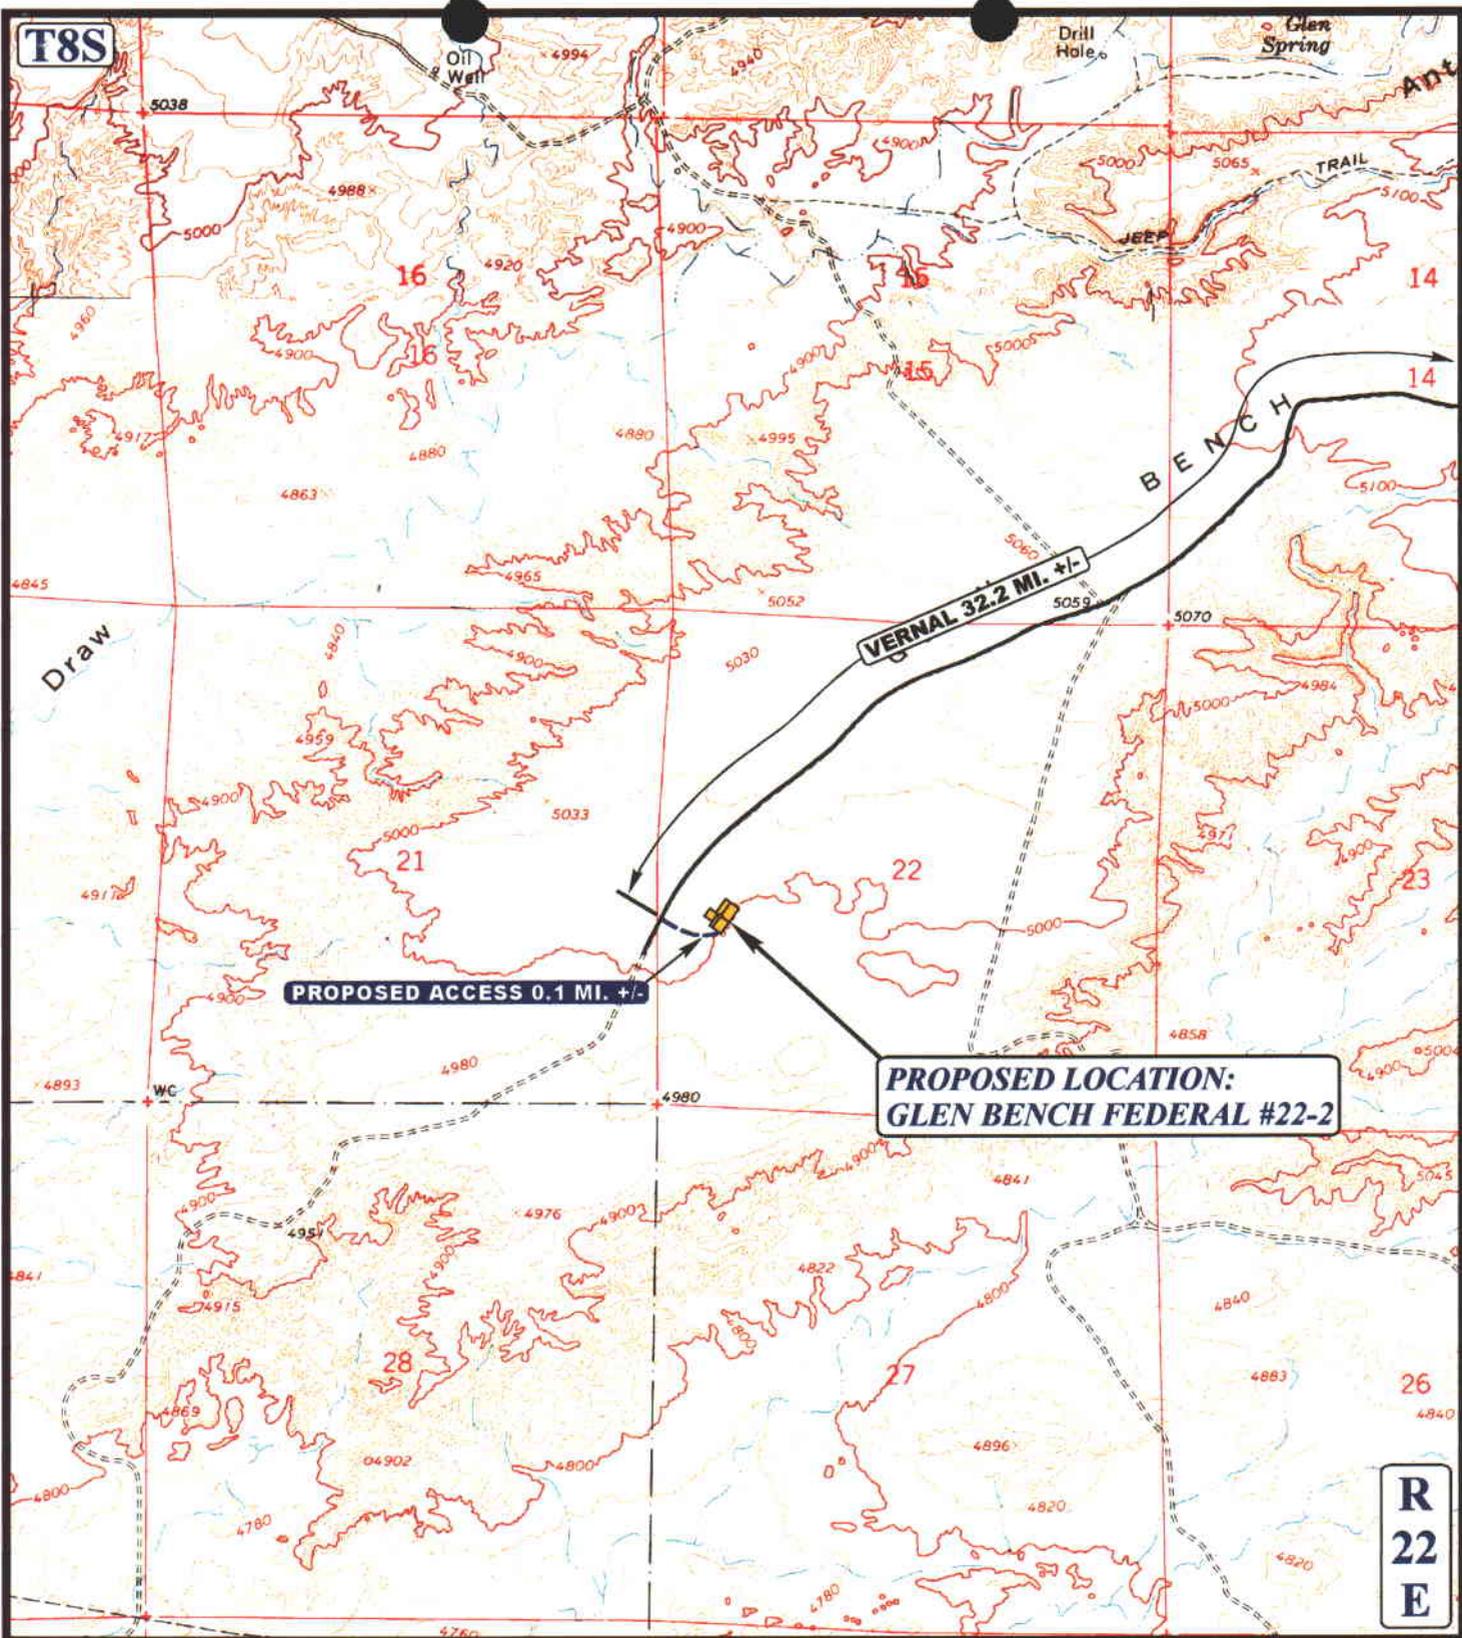

T8S

VERNAL 32.2 MI. +/-

PROPOSED ACCESS 0.1 MI. +/-

**PROPOSED LOCATION:
GLEN BENCH FEDERAL #22-2**

**R
22
E**

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING ROAD



COASTAL OIL & GAS CORP.

**GLEN BENCH FEDERAL #22-2
SECTION 22, T8S, R22E, S.L.B.&M.
1980' FSL 660' FWL**




Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC	11	28	00
MAP	MONTH	DAY	YEAR
SCALE: 1" = 2000'	DRAWN BY: K.G.		REVISED: 00-00-00



T8S

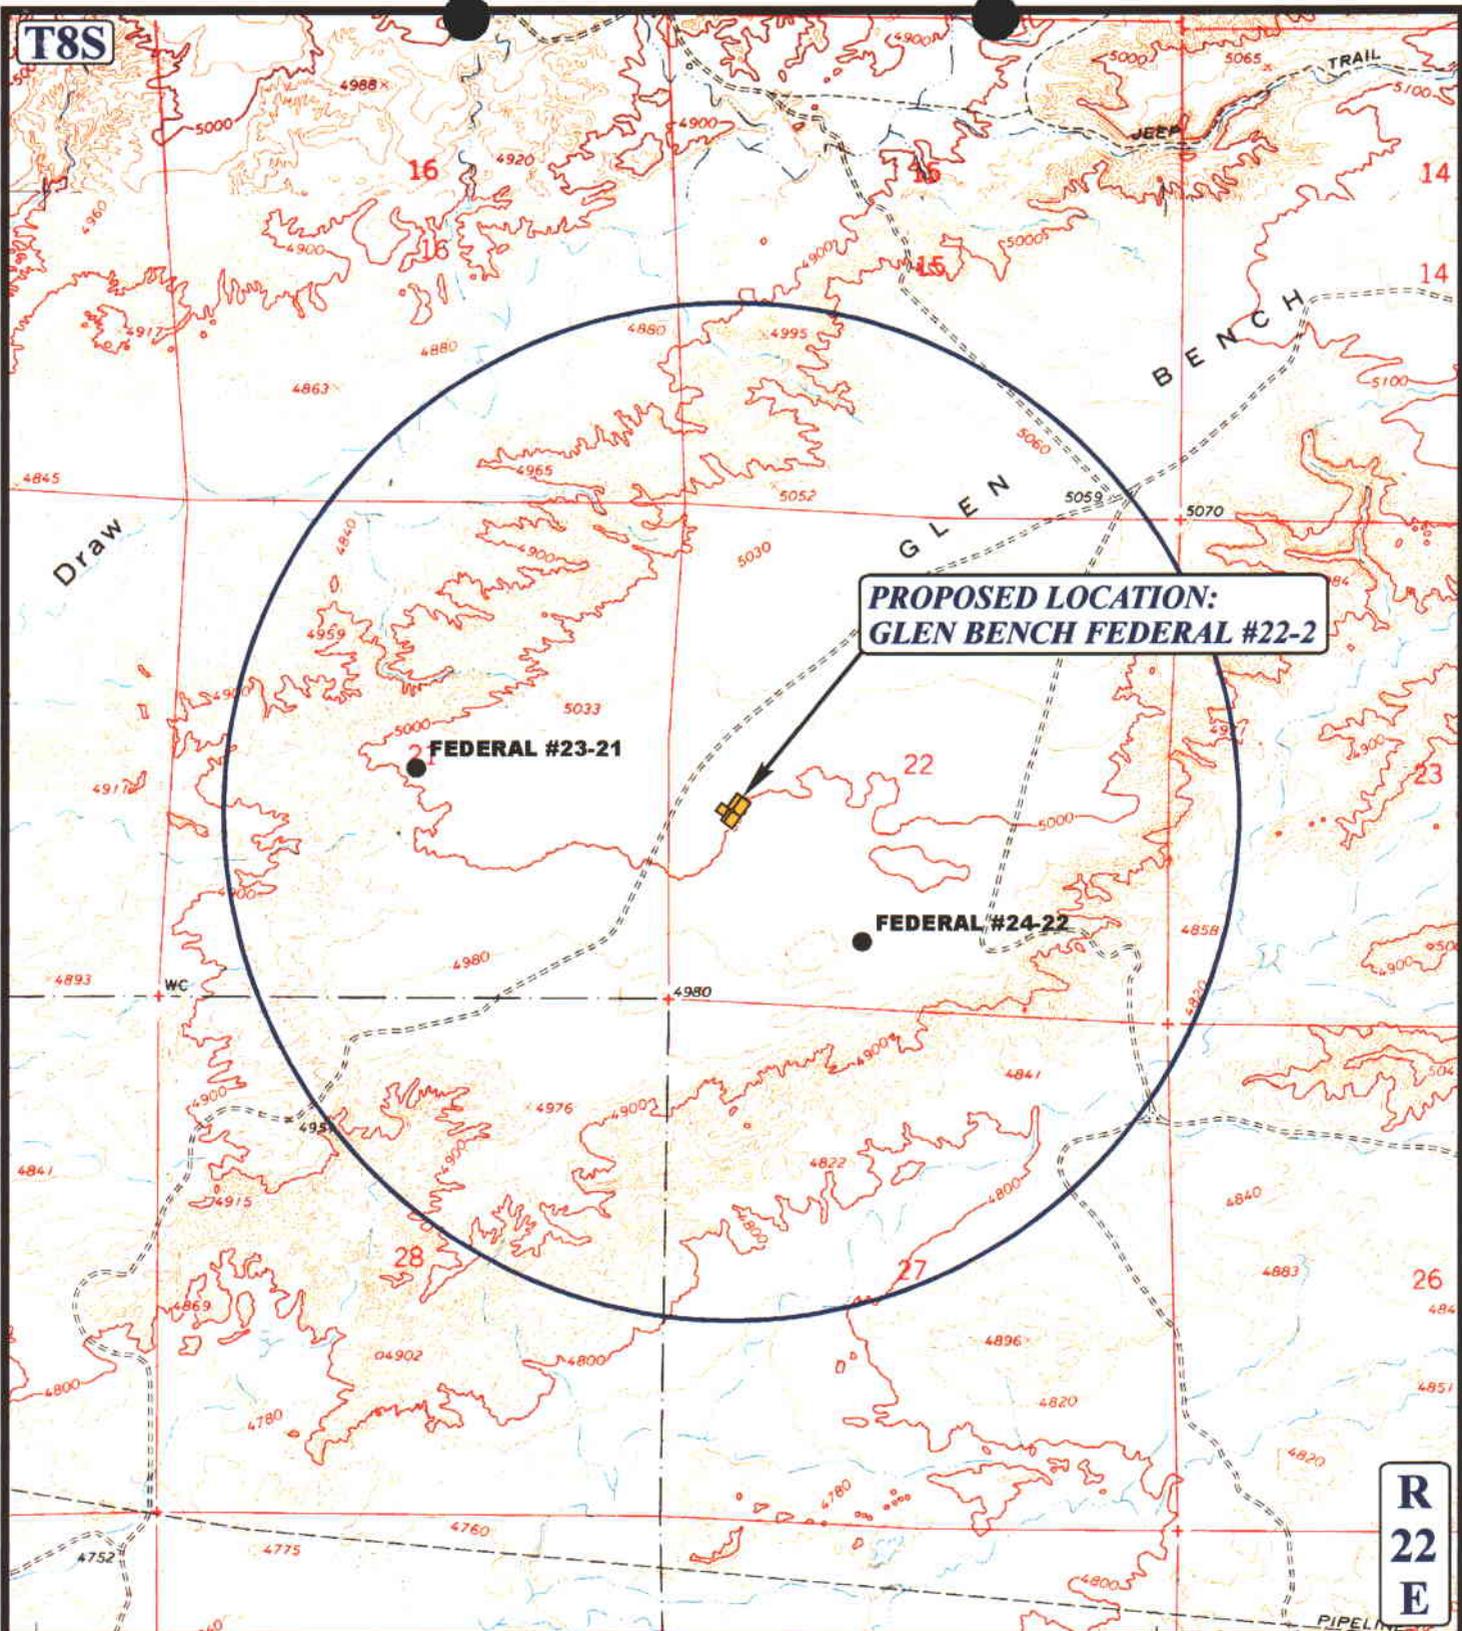

**PROPOSED LOCATION:
GLEN BENCH FEDERAL #22-2**

FEDERAL #23-21

FEDERAL #24-22

**R
22
E**

LEGEND:

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- ⊖ SHUT IN WELLS
- ⊕ WATER WELLS
- ⊖ ABANDONED WELLS
- ⊖ TEMPORARILY ABANDONED



COASTAL OIL & GAS CORP.

**GLEN BENCH FEDERAL #22-2
SECTION 22, T8S, R22E, S.L.B.&M.
1980' FSL 660' FWL**




Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 11 28 00
MAP MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: K.G. REVISED: 00-00-00



T8S

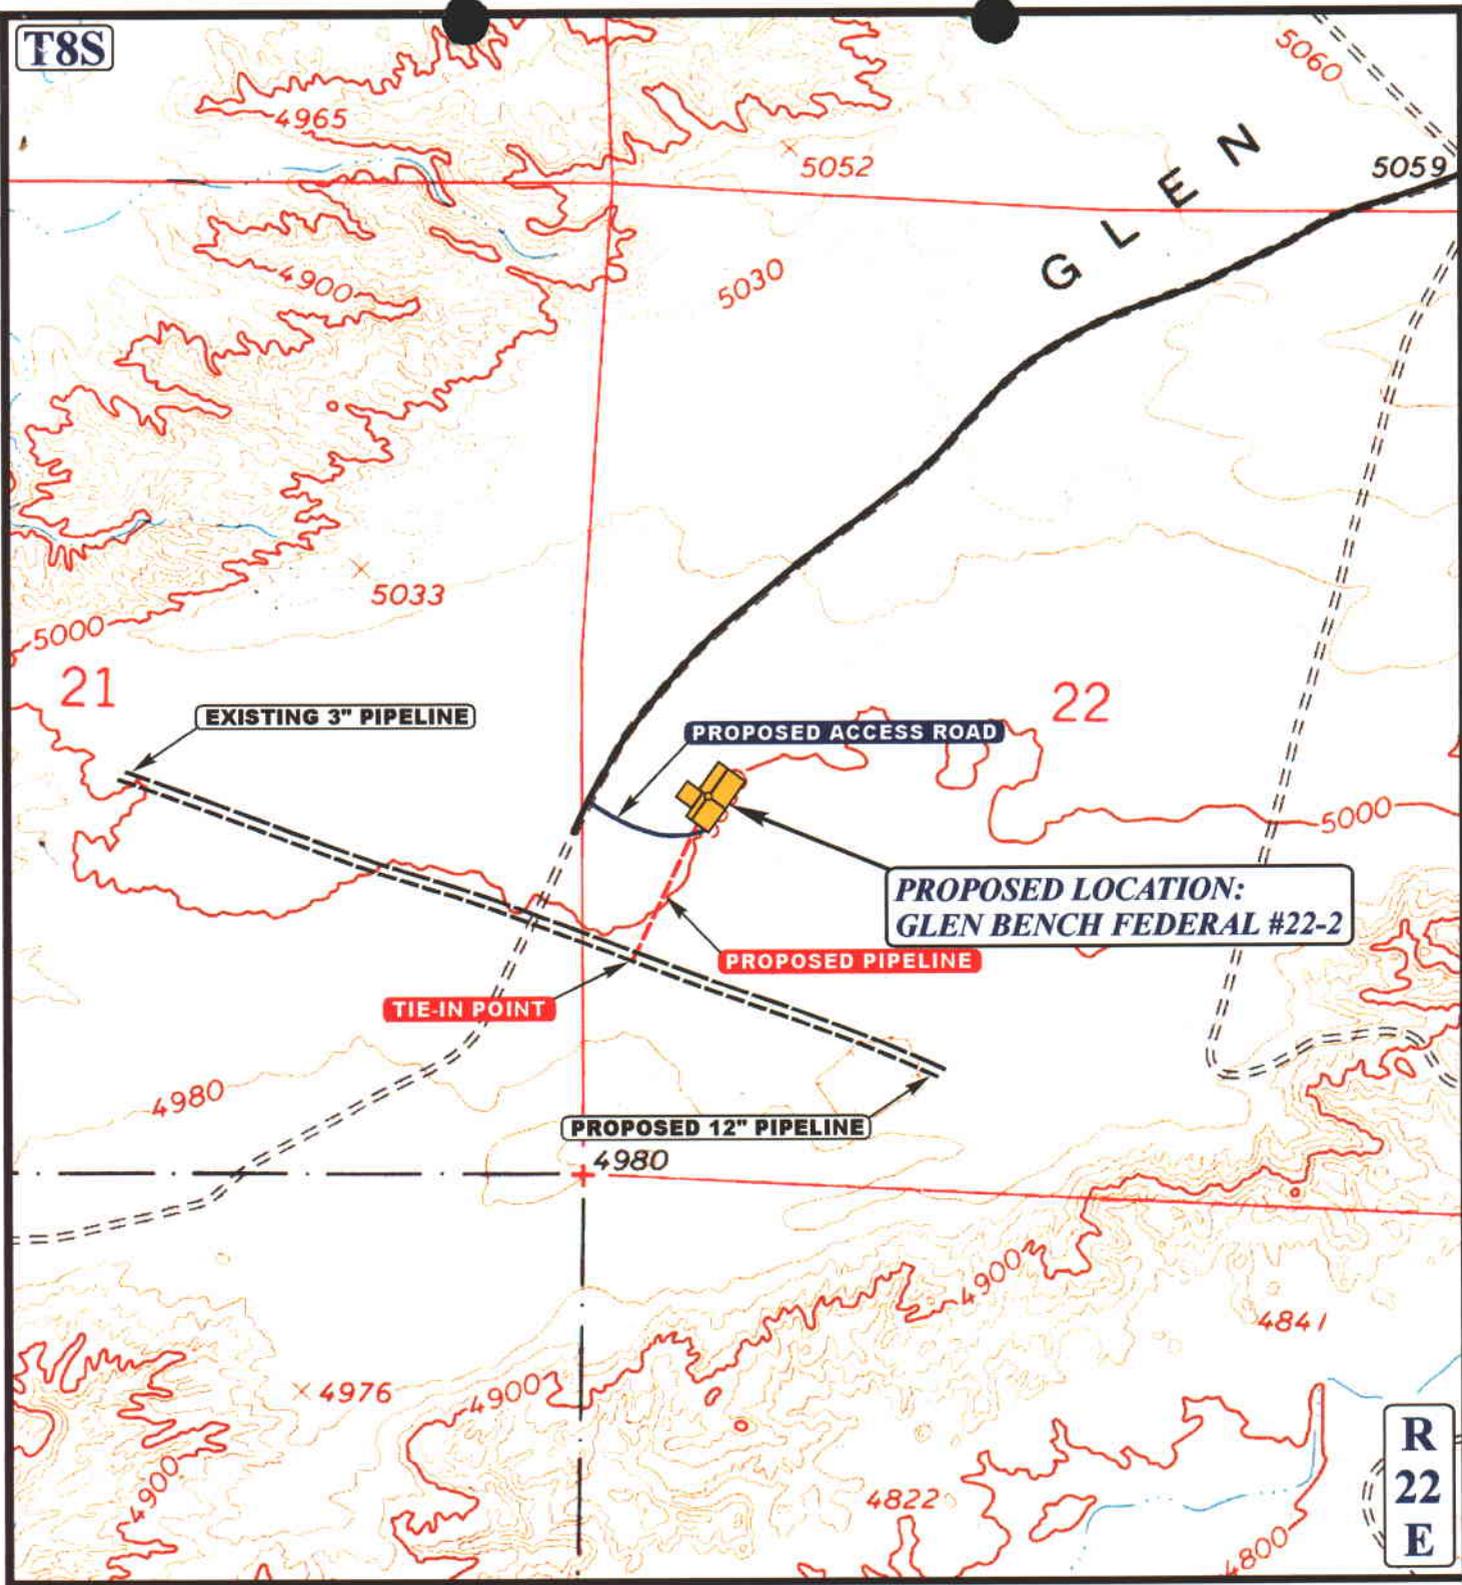

**PROPOSED LOCATION:
GLEN BENCH FEDERAL #22-2**

APPROXIMATE TOTAL PIPELINE DISTANCE = 750' +/-

LEGEND:

-  EXISTING PIPELINE
-  PROPOSED PIPELINE
-  PROPOSED ACCESS



COASTAL OIL & GAS CORP.
GLEN BENCH FEDERAL #22-2
SECTION 22, T8S, R22E, S.L.B.&M.
1980' FSL 660' FWL

U&L S
Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC **11 28 99**
MAP MONTH DAY YEAR
 SCALE: 1" = 1000' DRAWN BY: K.G. REVISED: 00-00-00

**R
22
E**

**D
TOPO**

COASTAL OIL & GAS CORP.
GLEN BENCH FEDERAL #22-2
 LOCATED IN UINTAH COUNTY, UTAH
 SECTION 22, T8S, R22E, S.L.B.&M.



PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: SOUTHEASTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: EASTERLY



UELS Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 435-789-1017 uels@uelsinc.com

LOCATION PHOTOS			11	28	00	PHOTO
TAKEN BY: D.K.			MONTH	DAY	YEAR	
DRAWN BY: K.G.			REVISED: 00-00-00			

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 05/22/2001

API NO. ASSIGNED: 43-047-34092

WELL NAME: GLEN BENCH FED 22-2
 OPERATOR: COASTAL OIL & GAS CORP (N0230)
 CONTACT: CHERYL CAMERON

PHONE NUMBER: 435-781-7023

PROPOSED LOCATION:

NWSW 22 080S 220E
 SURFACE: 1980 FSL 0660 FWL
 BOTTOM: 1980 FSL 0660 FWL
 UINTAH
 NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
 LEASE NUMBER: U-28652
 SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: WSMVD

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. U-605382-9)
- Potash (Y/N)
- Oil Shale (Y/N) *190-5 (B) or 190-3
- Water Permit
(No. 43-8496)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)


LOCATION AND SITING:

- R649-2-3. Unit _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____
- R649-3-11. Directional Drill

COMMENTS:

STIPULATIONS:

- ① Spacing Stipulation
- ② FEDERAL APPROVAL

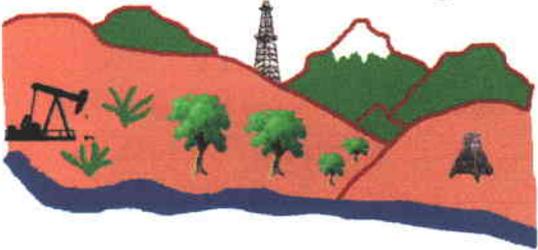


Utah Oil Gas and Mining

OPERATOR: COASTAL O&G CORP (N0230)

SEC. 21, T8S, R22E

FIELD: NATURAL BUTTES (630)

COUNTY: UINTAH SPACING: R649-3-2/GEN ST

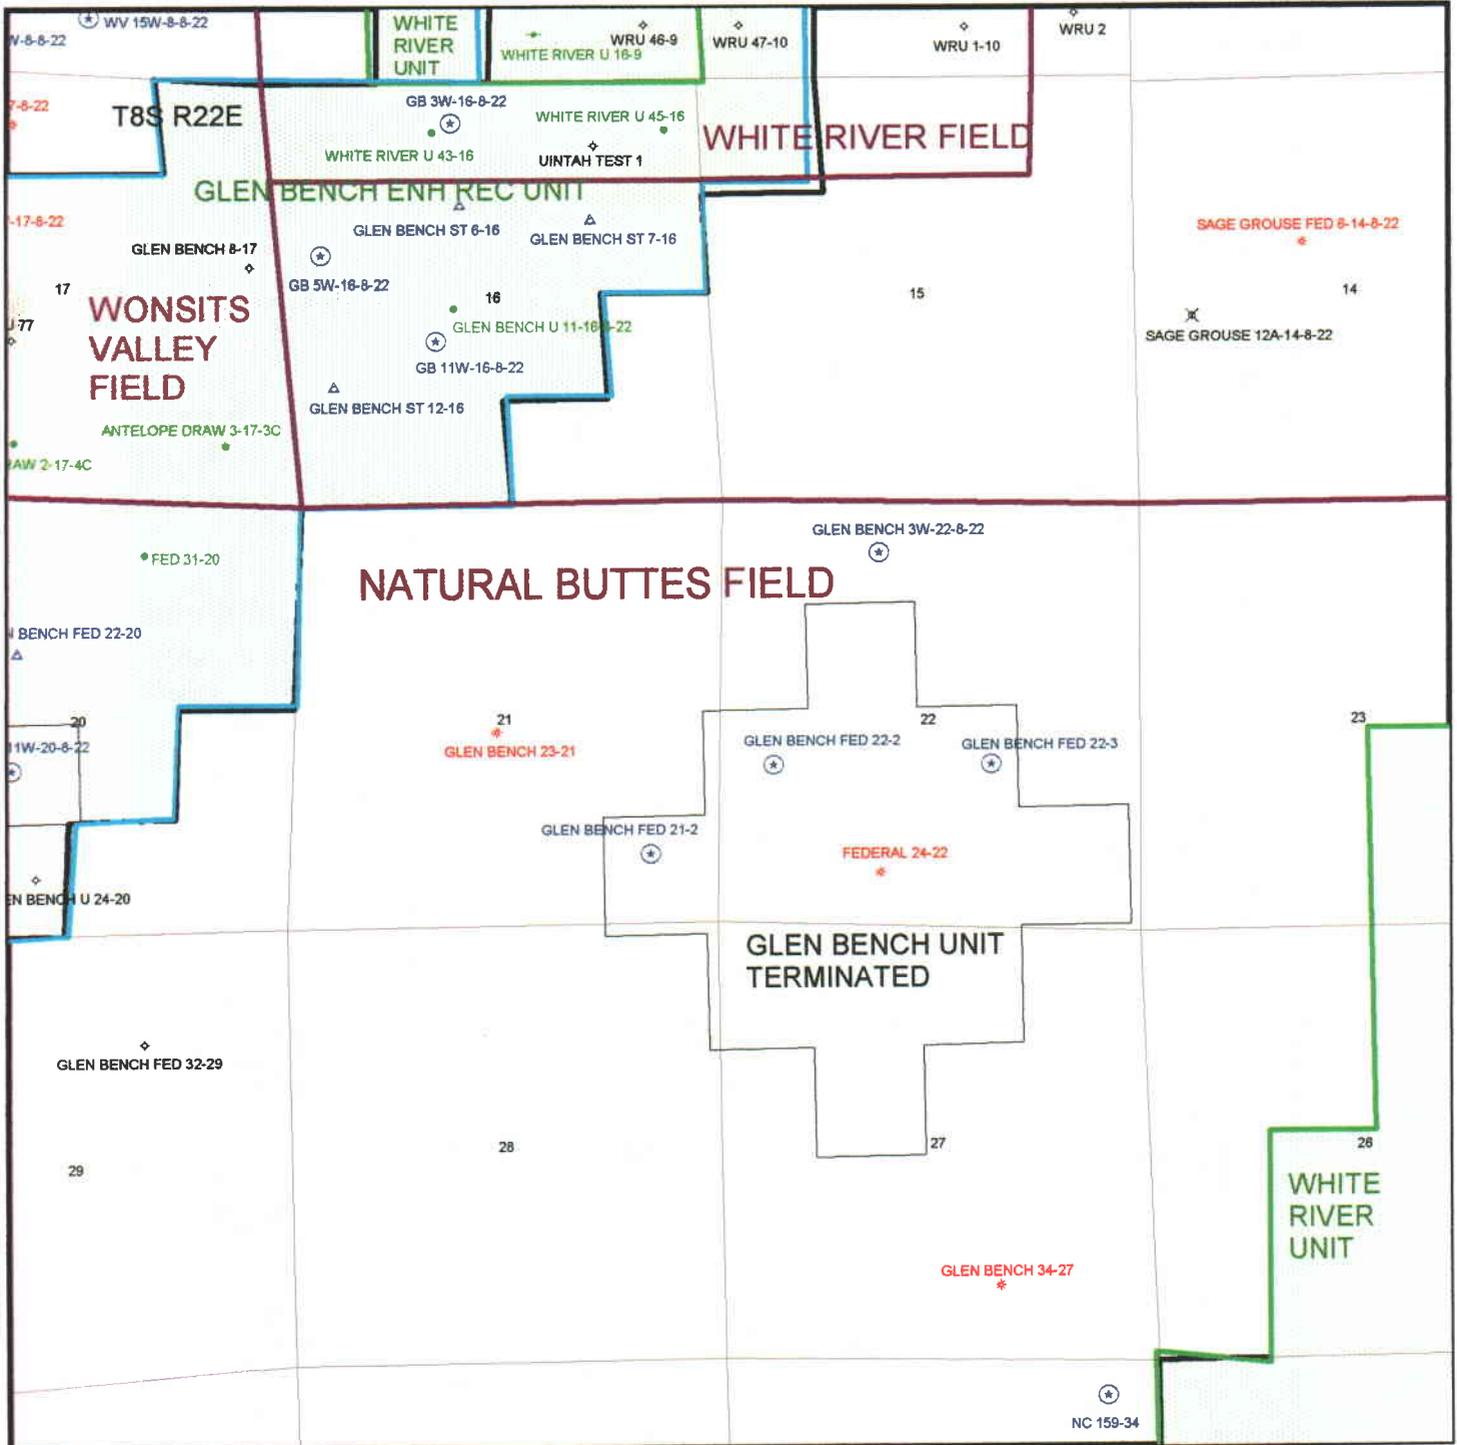

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:

6. IF INDIAN ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

8. WELL NAME and NUMBER:

Exhibit "A"

9. API NUMBER:

10. FIELD AND POOL, OR WILDCAT:

1. TYPE OF WELL OIL WELL GAS WELL OTHER _____

2. NAME OF OPERATOR:
El Paso Production Oil & Gas Company

3. ADDRESS OF OPERATOR: 8 South 1200 East CITY Vernal STATE Utah ZIP 84078 PHONE NUMBER: 435-789-4433

4. LOCATION OF WELL

FOOTAGES AT SURFACE:

COUNTY:

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:

STATE:

UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA



TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Name Change</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

As a result of the merger between The Coastal Corporation and a wholly owned subsidiary of El Paso Energy Corporation, the name of Coastal Oil & Gas Corporation has been changed to El Paso Production Oil & Gas Company effective March 9, 2001.

See Exhibit "A"

Bond # 400JU0708

Coastal Oil & Gas Corporation
NAME (PLEASE PRINT) John T. Elzner TITLE Vice President
SIGNATURE  DATE 06-15-01
El Paso Production Oil & Gas Company
NAME (PLEASE PRINT) John T. Elzner TITLE Vice President
SIGNATURE  DATE 06-15-01

(This space for State use only)

RECEIVED

JUN 19 2001

DIVISION OF
OIL, GAS AND MINING

State of Delaware
Office of the Secretary of State

PAGE 1

I, HARRIET SMITH WINDSOR, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF AMENDMENT OF "COASTAL OIL & GAS CORPORATION", CHANGING ITS NAME FROM "COASTAL OIL & GAS CORPORATION" TO "EL PASO PRODUCTION OIL & GAS COMPANY", FILED IN THIS OFFICE ON THE NINTH DAY OF MARCH, A.D. 2001, AT 11 O'CLOCK A.M.

RECEIVED

MAR 9 2001

DIVISION OF
OIL GAS AND MINING



Harriet Smith Windsor
Harriet Smith Windsor, Secretary of State

0610204 8100

AUTHENTICATION: 1061007

010162788

DATE: 04-03-01

CERTIFICATE OF AMENDMENT

OF

CERTIFICATE OF INCORPORATION

COASTAL OIL & GAS CORPORATION (the "Company"), a corporation organized and existing under and by virtue of the General Corporation Law of the State of Delaware, DOES HEREBY CERTIFY:

FIRST: That the Board of Directors of the Company, by the unanimous written consent of its members, filed with the minutes of the Board, adopted a resolution proposing and declaring advisable the following amendment to the Certificate of Incorporation of the Company:

RESOLVED that it is deemed advisable that the Certificate of Incorporation of this Company be amended, and that said Certificate of Incorporation be so amended, by changing the Article thereof numbered "FIRST." so that, as amended, said Article shall be and read as follows:

"FIRST. The name of the corporation is El Paso Production Oil & Gas Company."

SECOND: That in lieu of a meeting and vote of stockholders, the stockholders entitled to vote have given unanimous written consent to said amendment in accordance with the provisions of Section 228 of the General Corporation Law of the State of Delaware.

THIRD: That the aforesaid amendment was duly adopted in accordance with the applicable provisions of Sections 242 and 228 of the General Corporation Law of the State of Delaware.

IN WITNESS WHEREOF, said COASTAL OIL & GAS CORPORATION has caused this certificate to be signed on its behalf by a Vice President and attested by an Assistant Secretary, this 9th day of March 2001.

COASTAL OIL & GAS CORPORATION

David L. Siddall

David L. Siddall
Vice President

Attest:

Margaret E. Roark

Margaret E. Roark, Assistant Secretary

RECEIVED

STATE OF DELAWARE
SECRETARY OF STATE
DIVISION OF CORPORATIONS
FILED 11:00 AM 03/09/2001
010118394 - 0610204

JUN 19 2001

DIVISION OF
OIL, GAS AND MINING



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt
Governor

Kathleen Clarke
Executive Director

Lowell P. Braxton
Division Director

1594 West North Temple, Suite 1210
PO Box 145801
Salt Lake City, Utah 84114-5801
801-538-5340
801-359-3940 (Fax)
801-538-7223 (TDD)

July 5, 2001

Coastal Oil & Gas Corporation
PO Box 1148
Vernal, UT 84078

Re: Glen Bench Federal 22-2 Well, 1980' FSL, 660' FWL, NW SW, Sec. 22, T. 8 South,
R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-34092.

Sincerely,

A handwritten signature in black ink, appearing to read "John R. Baza".

John R. Baza
Associate Director

er

Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: Coastal Oil & Gas Corporation

Well Name & Number Glen Bench Federal 22-2

API Number: 43-047-34092

Lease: U 28652

Location: NW SW **Sec.** 22 **T.** 8 South **R.** 22 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining. In order to avoid the possibility of waste or injury to correlative rights, the operator is required to analyze available geological and engineering data from nearby wells and to seek appropriate drilling unit establishment by submitting a Request for Agency Action for a hearing and order by the Board.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

RECEIVED

JUL 12 2001

**DIVISION OF
OIL, GAS AND MINING**

In Reply Refer To:
3106
UTSL-065841
(UT-924)

JUL 10 2001

NOTICE

El Paso Production Oil & Gas Company : Oil and Gas
Nine Greenway Plaza :
Houston TX 77046-0095 :

Name Change Recognized


Acceptable evidence has been received in this office concerning the name change of Coastal Oil & Gas Corporation into El Paso Production Oil & Gas Company with El Paso Production Oil & Gas Company being the surviving entity.

For our purposes, the name change is recognized effective March 9, 2001.

The oil and gas lease files identified on the enclosed exhibit have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Coastal Oil & Gas Corporation to El Paso Production Oil & Gas Company. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Wyoming and Colorado.



Opolonia L. Abeyta
Acting Chief, Branch of
Minerals Adjudication

Enclosure

1. Exhibit of Leases (1 pp)

cc: Moab Field Office
Vernal Field Office
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217
~~State of Utah~~ DOGM, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114
Teresa Thompson (UT-922)
Joe Incardine (UT-921)

Exhibit of Leases

UTUSL-065841A	UTU-47172	UTU-74415	UTU-53860
UTU-28652	UTU-50687	UTU-74416	UTU-66401
UTU-37943	UTU-52298	UTU-75091	UTU-67868
UTU-44089	UTU-0109054	UTU-75096	UTU-65389
UTU-44090A	UTU-0143511	UTU-75097	UTU-77084
UTU-61263	UTU-0143512	UTU-75673	UTU-61430
UTU-00343	UTU-38401	UTU-76259	UTU-72633
UTU-02651	UTU-38411	UTU-76260	UTU-72650
UTU-02651B	UTU-38418	UTU-76261	UTU-49692
UTU-0142175	UTU-38419	UTU-76493	UTU-57894
UTU-70235	UTU-38420	UTU-76495	UTU-76829
UTU-70406	UTU-38421	UTU-76503	UTU-76830
UTU-74954	UTU-38423	UTU-78228	UTU-76831
UTU-75132	UTU-38424	UTU-78714	
UTU-75699	UTU-38425	UTU-78727	
UTU-76242	UTU-38426	UTU-78734	
UTU-78032	UTU-38427	UTU-79012	
UTU-4377	UTU-38428	UTU-79011	
UTU-4378	UTU-53861	UTU-71694	
UTU-7386	UTU-58097	UTU-00576	
UTU-8344A	UTU-64376	UTU-00647	
UTU-8345	UTU-65222	UTU-01470D	
UTU-8347	UTU-65223	UTU-0136484	
UTU-8621	UTU-66746	UTU-8344	
UTU-14646	UTU-67178	UTU-8346	
UTU-15855	UTU-67549	UTU-8648	
UTU-25880	UTU-72028	UTU-28212	
UTU-28213	UTU-72632	UTU-30289	
UTU-29535	UTU-73009	UTU-31260	
UTU-29797	UTU-73010	UTU-33433	
UTU-31736	UTU-73013	UTU-34711	
UTU-34350	UTU-73175	UTU-46699	
UTU-34705	UTU-73434	UTU-78852	
UTU-37116	UTU-73435	UTU-78853	
UTU-37355	UTU-73444	UTU-78854	
UTU-37573	UTU-73450	UTU-075939	
UTU-38261	UTU-73900	UTU-0149767	
UTU-39223	UTU-74409	UTU-2078	
UTU-40729	UTU-74410	UTU-44426	
UTU-40736	UTU-74413	UTU-49530	
UTU-42469	UTU-74414	UTU-51026	

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		CONFIDENTIAL	5. Lease Serial No. U-28652
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone			6. If Indian, Allottee or Tribe Name
2. Name of Operator COASTAL OIL & GAS CORPORATION		Contact: CHERYL CAMERON E-Mail: Cheryl.Cameron@CoastalCorp.com	7. If Unit or CA Agreement, Name and No.
3a. Address P.O. BOX 1148 VERNAL, UT 84078	3b. Phone No. (include area code) Ph: 435.781.7023 Fx: 435.789.4436	8. Lease Name and Well No. GLEN BENCH FEDERAL 22-2	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NWSW 1980FSL 660FWL At proposed prod. zone		9. API Well No.	
14. Distance in miles and direction from nearest town or post office* 32.2 MILES SOUTHWEST OF VERNAL, UTAH		10. Field and Pool, or Exploratory GLEN BENCH FIELD	
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 660		11. Sec., T., R., M., or Blk. and Survey or Area Sec 22 T8S R22E Mer SBM	
16. No. of Acres in Lease 1920.00		12. County or Parish UINTAH	13. State UT
17. Spacing Unit dedicated to this well 40.00		18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. REFER TO TOPO C	
19. Proposed Depth 11100 MD		20. BLM/BIA Bond No. on file U-605382-9	
21. Elevations (Show whether DF, KB, RT, GL, etc.) 5004 GL		22. Approximate date work will start	
23. Estimated duration			

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|--|--|
| <ul style="list-style-type: none"> 1. Well plat certified by a registered surveyor. 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | <ul style="list-style-type: none"> 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification 6. Such other site specific information and/or plans as may be required by the authorized officer. |
|--|--|

25. Signature	Name (Printed/Typed) CHERYL CAMERON	Date 05/18/2001
Title OPERATIONS		
Approved by (Signature) 	Name (Printed/Typed)	Date 07/17/2001
Title Assistant Field Manager Mineral Resources	Office NOTICE OF APPROVAL	

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

CONDITIONS OF APPROVAL ATTACHED

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #4272 verified by the BLM Well Information System
For COASTAL OIL & GAS CORPORATION, sent to the Vernal
Committed to AFMSS for processing by LESLIE CRINKLAW on 05/21/2001 ()

** ORIGINAL **

006M

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Coastal Oil & Gas Corp.
Well Name & Number: Glen Bench Federal 22-2
API Number: 43-047-34092
Lease Number: UTU - 28652
Location: NWSW Sec. 22 T. 8S R. 22E
Agreement: N/A

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to or John Mayers or Pete Sokolosky of this office prior to setting the next casing string or requesting plugging orders. Faxed copies of State of Utah form OGC-8-X are acceptable.

2. Pressure Control Equipment

A 3M BOPE system will be installed and tested as outlined in Onshore Oil & Gas Order No. 2 prior to drilling out the surface casing shoe. A 5M BOPE system will be installed and tested as outlined in Onshore Oil & Gas Order No. 2 prior to drilling out the intermediate casing shoe.

3. Casing Program and Auxiliary Equipment

The base of the moderately fresh water is estimated to be at 3159'. At a minimum, the intermediate casing must be cemented back to 2959' to protect this resource.

All casing strings below the conductor shall be pressure tested to 0.22 psi/ft of casing string length or 1500 psi, whichever is greater but not to exceed 70% of the minimum internal yield.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

A cement bond log (CBL) will be run from the production casing shoe to the base of the intermediate casing shoe and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Written notification of such must be submitted to this office not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5(d) shall be submitted to the appropriate Field Office within 60 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (1).

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling onlease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries and tested for meter accuracy at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, you must contact one of the following individuals:

Ed Forsman (435) 789-7077 (HOME) (435) 646-1685 (PAGER)
Petroleum Engineer

Kirk Fleetwood (435) 789-6858 (HOME) (435) 646-1678 (PAGER)
Petroleum Engineer

BLM FAX Machine (435) 781-4410

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids.

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

-The access road and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development, (1989).

The new road and the existing roads to the location shall be constructed/upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Construction/upgrading shall include ditching, draining, graveling, crowning, and capping the roadbed as necessary to provide a well constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30-foot disturbance corridor will not be allowed. Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

The operator is responsible for informing all persons in the area associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator is to immediately stop work that might further disturb such materials, and contact the authorized officer (AO). Within five working days the AO will inform the operator as to:

1. Whether the materials appear eligible for the National Register Of Historic Places;
2. The mitigation measures the operator will likely have to undertake before the site can be used (assuming in situ preservation is not necessary); and,
3. A time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on Federal Lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

All permanent facilities will be painted Carlsbad Canyon instead of the Desert Brown stipulated in the APD.

The reserve pit topsoil shall be piled separate from the location topsoil.

The location topsoil pile will be seeded immediately after the soil is piled by broadcasting the seed mix identified in the APD, then walking the topsoil pile with the dozer to plant the seed.

All poundages are in Pure Live Seed.

The subsoil which is piled on the location is for the construction of tank dikes. **Topsoil will not be used for the construction of tank dikes.**

Once the reserve pit is dry, it shall be filled, recontoured, topsoil spread, and seeded in the same manner discussed above.

OPERATOR CHANGE WORKSHEET

ROUTING

1. GLH		4-KAS
2. CDW	✓	5-LP ✓
3. JLT		6-FILE

Enter date after each listed item is completed

Change of Operator (Well Sold)

Designation of Agent

Operator Name Change (Only)

X Merger

The operator of the well(s) listed below has changed, effective: **3-09-2001**

FROM: (Old Operator):
COASTAL OIL & GAS CORPORATION
Address: 9 GREENWAY PLAZA STE 2721
HOUSTON, TX 77046-0995
Phone: 1-(713)-418-4635
Account N0230

TO: (New Operator):
EL PASO PRODUCTION OIL & GAS COMPANY
Address: 9 GREENWAY PLAZA STE 2721 RM 2975B
HOUSTON, TX 77046-0995
Phone: 1-(832)-676-4721
Account N1845

CA No.

Unit:

WELL(S)

NAME	API NO	ENTITY NO	SEC TWN RNG	LEASE TYPE	WELL TYPE	WELL STATUS
BASER 6-2	43-047-31859	10967	06-07S-22E	FEDERAL	GW	P
WALKER HOLLOW MCLISH 3	43-047-30027	12504	08-07S-23E	FEDERAL	GW	S
FEDERAL 33-92 (CA NRM-1705)	43-047-33385	12726	33-08S-21E	FEDERAL	GW	P
FEDERAL 33-93 (CA NRM-1705)	43-047-33386	12727	33-08S-21E	FEDERAL	GW	P
FEDERAL 33-176 (CA NRM-1705)	43-047-33928	99999	33-08S-21E	FEDERAL	GW	APD
FEDERAL 33-177 (CA NRM-1705)	43-047-33874	99999	33-08S-21E	FEDERAL	GW	APD
FEDERAL 35 5 (CA NRM-1604)	43-047-30563	70	35-08S-21E	FEDERAL	GW	P
FEDERAL 35-96 (CA NRM-1604)	43-047-33377	12715	35-08S-21E	FEDERAL	GW	P
ANKERPONT 35 36 (CA 9C-182)	43-047-31960	11248	35-08S-21E	FEDERAL	GW	P
FEDERAL 35-179 (CA NRM-1604)	43-047-33877	99999	35-08S-21E	FEDERAL	GW	APD
FEDERAL 35-190 (CA NRM-1604)	43-047-33918	99999	35-08S-21E	FEDERAL	GW	APD
WONSIT FEDERAL 1-5	43-047-33692	13081	05-08S-22E	FEDERAL	GW	DRL
GLEN BENCH 23-21	43-047-31007	6054	21-08S-22E	FEDERAL	GW	P
GLEN BENCH FEDERAL 21-2	43-047-34091	99999	21-08S-22E	FEDERAL	GW	APD
GLEN BENCH FEDERAL 21-2	43-047-34092	99999	22-08S-22E	FEDERAL	GW	APD
GLEN BENCH FEDERAL 22-3	43-047-34093	99999	22-08S-22E	FEDERAL	GW	APD
GLEN BENCH 34-27	43-047-31022	10880	27-08S-22E	FEDERAL	GW	P
HALL 31-61 (CA NRM-1887)	43-047-33341	12607	31-08S-22E	FEDERAL	GW	P
FEDERAL 31-57 (CA NRM-1887)	43-047-32716	11833	31-08S-22E	FEDERAL	GW	P
KENNEDY WASH 4-1	43-047-33664	99999	04-08S-23E	FEDERAL	GW	APD

OPERATOR CHANGES DOCUMENTATION

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 06/19/2001
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 06/19/2001
- The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 06/21/2001
- Is the new operator registered in the State of Utah: YES Business Number: 608186-0143

5. If **NO**, the operator was contacted contacted on: N/A
6. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the (merger, name change, or operator change for all wells listed on Federal or Indian leases on: 07/10/2001
7. **Federal and Indian Units:** The BLM or BIA has approved the successor of unit operator for wells listed on: 07/10/2001
8. **Federal and Indian Communization Agreements ("CA"):** The BLM or the BIA has approved the operator change for all wells listed involved in a CA on: 07/10/2001
9. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

DATA ENTRY:

1. Changes entered in the **Oil and Gas Database** on: 07/25/2001
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 07/25/2001
3. Bond information entered in RBDMS on: N/A
4. Fee wells attached to bond in RBDMS on: N/A

STATE BOND VERIFICATION:

1. State well(s) covered by Bond No.: N/A

FEDERAL BOND VERIFICATION:

1. Federal well(s) covered by Bond No.: WY 2793

FEE WELLS - BOND VERIFICATION/LEASE INTEREST OWNER NOTIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond No: N/A
2. The **FORMER** operator has requested a release of liability from their bond on: N/A
The Division sent response by letter on: N/A
3. (R649-2-10) The **FORMER** operator of the Fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: _____

FILMING:

1. All attachments to this form have been **MICROFILMED** on: _____

FILING:

1. **ORIGINALS/COPIES** of all attachments pertaining to each individual well have been filed in each well file on: _____

COMMENTS: Master list of all wells involved in operator change from Coastal Oil & Gas Corporation to El Paso Production Oil and Gas Company shall be retained in the "Operator Change File".

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
U-28652

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
GLEN BENCH FED 22-2

9. API Well No.
43-047-34092

10. Field and Pool, or Exploratory
GLEN BENCH FIELD

11. County or Parish, and State
UINTAH COUNTY, UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

CONFIDENTIAL

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
EL PASO PRODUCTION O&G COMPANY
Contact: SHEILA UPCHEGO
E-Mail: sheila.upchego@EIPaso.com

3a. Address
P.O. BOX 1148
VERNAL, UT 84078

3b. Phone No. (include area code)
Ph: 435.781.7024
Fx: 435.789.4436

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 22 T8S R22E NWSW 1980FSL 660FWL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

THE OPERATOR REQUESTS THAT THE APD FOR THE SUBJECT WELL BE EXTENDED FOR AN ADDITIONAL YEAR SO THAT THE DRILLING OPERATIONS MAY BE COMPLETED.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 07-03-02
By: *[Signature]*

COPY SENT TO OPERATOR
Date: 7-8-02
Initials: CHD

RECEIVED
JUL 10 2002
DIVISION OF
OIL, GAS AND MINING

14. I hereby certify that the foregoing is true and correct.
Electronic Submission #12142 verified by the BLM Well Information System
For EL PASO PRODUCTION O&G COMPANY, sent to the Vernal

Name (Printed/Typed) SHEILA UPCHEGO Title REGULATORY ANALYST

Signature *[Signature]* (Electronic Submission) Date 06/18/2002

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



United States Department of the Interior **RECEIVED**

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

FEB 22 2002

DIVISION OF
OIL, GAS AND MINING

In Reply Refer To:
3106
UTU-25566 et al
(UT-924)

FEB 21 2002

NOTICE

Westport Oil and Gas Company L.P. : Oil and Gas
410 Seventeenth Street, #2300 :
Denver Colorado 80215-7093 :

Name Change Recognized

Acceptable evidence has been received in this office concerning the name change of Westport Oil and Gas Company, Inc. into Westport Oil and Gas Company, L.P. with Westport Oil and Gas Company, L.P. being the surviving entity.


For our purposes, the name change is recognized effective December 31, 2001.

The oil and gas lease files identified have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Westport Oil and Gas Company, Inc. to Westport Oil and Gas Company, L.P.. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Colorado.

UTU-03405
UTU-20895
UTU-25566
UTU-43156
UTU-49518
UTU-49519
UTU-49522
UTU-49523



Robert Lopez
Chief, Branch of
Minerals Adjudication

cc: Moab Field Office
Vernal Field Office
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217
State of Utah, DOGM, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114
Teresa Thompson (UT-922)
Joe Incardine (UT-921)



United States Department of the Interior

BUREAU OF INDIAN AFFAIRS

Washington, D.C. 20240

FEB 10 2003

IN REPLY REFER TO:
Real Estate Services

Carroll A. Wilson
Principal Landman
Westport Oil and Gas Company, L.P.
1368 South 1200 East
Vernal, Utah 84078

Dear Mr. Wilson:

This is in response to your request for approval of RLI Insurance Company's Nationwide Oil and Gas Lease Bond No. RLB0005239 executed effective December 17, 2002, (\$150,000 coverage) with Westport Oil and Gas Company, L. P., as principal.

This bond is hereby approved as of the date of this correspondence and will be retained in the Bureau of Indian Affairs' Division of Real Estate Services, 1849 C Street, NW, MS-4512-MIB, Washington, D.C. 20240. All Bureau oil and gas regional offices and the surety are being informed of this action.

In cases where you have existing individual and/or collective bonds on file with one or more of our regional offices, you may now request those offices, directly, to terminate in lieu of coverage under this Nationwide Bond.

Enclosed is a copy of the approved bond for your files. If we may be of further assistance in this matter, please advise.

Sincerely,

Director, Office of Trust Responsibilities

ACTING

Enclosure

memorandum

Branch of Real Estate Services
Uintah & Ouray Agency

Date: 5 December, 2002

Reply to
Attn of: Supervisory Petroleum Engineer

Subject: Modification of Utah Division of Oil, Gas and Mining Regulations

To: Director, Utah Division of Oil, Gas and Mining Division: John Baza


We have been advised of changes occurring with the operation of your database for Change of Operator. You will be modifying your records to reflect Change of Operator once you have received all necessary documentation from the companies involved, and perhaps in advance of our Notice of Concurrence/Approval of Change of Operator where Indian leases are involved.

We have no objection.

With further comment to Rulemaking, I wish to comment concerning the provision of Exhibits for upcoming Hearings. I would like to see the Uintah & Ouray Agency, BIA, and the Ute Indian Tribe, Energy & Mineral Resources Department added to the list of those parties that receive advance Exhibits so as to allow us to have research time prior to Hearing dates. We will be able to provide a more informed recommendation to the Oil, Gas and Mining Board. It would be best if we would receive only those Exhibits that concern Indian lands, specifically on or adjacent to Indian lands. This may be a difficult situation to attain, as it is not always clear where 'on or adjacent' occurs.

I am aware that you have gone to extra effort to correct this matter already, and I fully appreciate it. My request is intended only to allow the addition of Uintah & Ouray Agency and Ute Indian Tribe to the official listing.

We appreciate your concern, and hope that these comments are timely enough for consideration in the revision process.



CC: Minerals & Mining Section of RES
Ute Energy & Mineral Resources Department: Executive Director
chronos

JAN. 17. 2003 3:34PM

PORT

NO. 173 P. 2

**WESTPORT OIL AND GAS COMPANY, L.P.**

410 Seventeenth Street #2300 Denver Colorado 80202-4436
Telephone: 303 573 5404 Fax: 303 573 5609

February 1, 2002

Department of the Interior
Bureau of Land Management
2850 Youngfield Street
Lakewood, CO 80215-7093
Attention: Ms. Martha Maxwell

**RE: BLM Bond CO-1203
BLM Nationwide Bond 158626364
Surety - Continental Casualty Company
Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.
Conversion of Westport Oil and Gas Company, Inc., into Westport Oil and Gas Company, L.P.
Assumption Rider - Westport Oil and Gas Company, L.P.**

Dear Ms. Maxwell:

Pursuant to our recent conversations, please find the following list of enclosures for the BLM's consideration and approval:

Two (2) Assumption Riders, fully executed originals.
Copies of Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.
Copies of Westport Oil and Gas Company, Inc., conversion into Westport Oil and Gas Company, L.P.
List of all Federal/BIA/State Leases - Belco/Westport's leases - in all states.

Please inform us of any additional information needed to complete the change to Westport Oil and Gas Company, L.P., as operator of record.

I thank you for your assistance and cooperation in this matter. Please do not hesitate contacting the undersigned, should a question arise.

Sincerely,
Westport Oil and Gas Company, L.P.

Debby J. Black
Debby J. Black
Engineer Technician

Encl:

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

		5. LEASE DESIGNATION AND SERIAL NUMBER:
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____		8. WELL NAME and NUMBER: Exhibit "A"
2. NAME OF OPERATOR: El Paso Production Oil & Gas Company		9. API NUMBER:
3. ADDRESS OF OPERATOR: 9 Greenway Plaza Houston TX 77064-0995		10. FIELD AND POOL, OR WILDCAT:
PHONE NUMBER: (832) 676-5933		
4. LOCATION OF WELL		
FOOTAGES AT SURFACE:		COUNTY:
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	


12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Operator change to Westport Oil and Gas Company, L.P., 1670 Broadway, Suite 2800, Denver, CO. 80202-4800, effective December 17, 2002.

BOND # _____

State Surety Bond No. RLB0005236
Fee Bond No. RLB0005238

EL PASO PRODUCTION OIL & GAS COMPANY

By: 
Jon R. Nelsen, Attorney-in-Fact

RECEIVED

FEB 28 2003

DIV. OF OIL, GAS & MINING

WESTPORT OIL AND GAS COMPANY, L.P.		TITLE	Agent and Attorney-in-Fact
NAME (PLEASE PRINT)	David R. Dix	DATE	12/17/02
SIGNATURE			

(This space for State use only)

Form 3160-5
(August 1999)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

5. Lease Serial No.
SEE ATTACHED EXHIBIT "A"

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
SEE ATTACHED EXHIBIT "A"

9. API Well No.
SEE ATTACHED EXHIBIT "A"

10. Field and Pool, or Exploratory Area

11. County or Parish, State
UINTAH COUNTY, UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY, L.P.

3a. Address
P.O. BOX 1148 VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7023

4. Location of Well (Footage, Sec. T., R., M., or Survey Description)
SEE ATTACHED EXHIBIT "A"

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	SUCCESSOR OF OPERATOR
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed if testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator determined that the site is ready for final inspection.

WESTPORT OIL & GAS COMPANY, L.P., IS CONSIDERED TO BE THE OPERATOR ON THE ATTACHED DESCRIBED LANDS AND IS RESPONSIBLE UNDER THE TERMS AND CONDITIONS OF THE LEASE FOR THE OPERATIONS CONDUCTED ON THE LEASED LANDS OR PORTIONS THEREOF, BOND COVERAGE FOR THIS WELL IS PROVIDED BY FEDERAL NATIONWIDE BOND NO. 158626364, EFFECTIVE FEBRUARY 1, 2002, AND BIA NATIONWIDE BOND NO. RLB0005239, EFFECTIVE FEBRUARY 10, 2003.

RECEIVED
MAR 04 2003

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) **CHERYL CAMERON** Title **OPERATIONS**

Signature *Cheryl Cameron* Date **March 4, 2003**

THIS SPACE FOR FEDERAL OR STATE USE

Approved by _____ Title _____ Date _____

Office _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

OPERATOR CHANGE WORKSHEET

1. GLH
2. CDW ✓
3. FILE

X Change of Operator (Well Sold)

Designation of Agent/Operator

Operator Name Change

Merger

The operator of the well(s) listed below has changed, effective: **12-17-02**

FROM: (Old Operator):	TO: (New Operator):
EL PASO PRODUCTION OIL & GAS COMPANY	WESTPORT OIL & GAS COMPANY LP
Address: 9 GREENWAY PLAZA	Address: P O BOX 1148
HOUSTON, TX 77064-0995	VERNAL, UT 84078
Phone: 1-(832)-676-5933	Phone: 1-(435)-781-7023
Account No. N1845	Account No. N2115

CA No.

Unit:

WELL(S)

NAME	SEC TWN RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
TRIBAL 36 53	36-08S-21E	43-047-32695	11838	INDIAN	GW	P
UTE TRIBAL 36 17	36-08S-21E	43-047-30682	110	INDIAN	GW	P
TRIBAL 36-148	36-08S-21E	43-047-34507	99999	INDIAN	GW	APD
WONSITS FEDERAL 1-5	05-08S-22E	43-047-33692	13081	FEDERAL	GW	S
WONSITS FEDERAL 1-6	06-08S-22E	43-047-34081	99999	FEDERAL	GW	APD
WONSITS FEDERAL 2-6	06-08S-22E	43-047-34082	13297	FEDERAL	GW	DRL
WONSITS FEDERAL 3-6	06-08S-22E	43-047-34059	99999	FEDERAL	GW	APD
WONSITS FEDERAL 4-6	06-08S-22E	43-047-34083	99999	FEDERAL	GW	APD
KENNEDY WASH FED 13-1	13-08S-22E	43-047-33615	12926	FEDERAL	GW	P
GLEN BENCH 21-2	21-08S-22E	43-047-34091	99999	FEDERAL	GW	APD
GLEN BENCH 23-21	21-08S-22E	43-047-31007	6054	FEDERAL	GW	P
GLEN BENCH 22-2	22-08S-22E	43-047-34092	99999	FEDERAL	GW	APD
GLEN BENCH FEDERAL 24-22	22-08S-22E	43-047-30610	6124	FEDERAL	GW	P
GLEN BENCH FEDERAL 22-3	22-08S-22E	43-047-34093	13267	FEDERAL	GW	P
GLEN BENCH FEDERAL 3W-22-8-22	22-08S-22E	43-047-33652	99999	FEDERAL	GW	APD
GLEN BENCH 34-27	27-08S-22E	43-047-31022	10880	FEDERAL	GW	P
HALL 30 58	30-08S-22E	43-047-32715	11849	FEE	GW	P
HALL 30-143	30-08S-22E	43-047-33425	12830	FEE	GW	P
HALL 30-144	30-08S-22E	43-047-33426	12724	FEE	GW	P
STATE 31-57 (FEDERAL) (NRM-1887)	31-08S-22E	43-047-32716	11833	FEDERAL	GW	P

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 02/28/2003
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 03/04/2003
- The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 03/06/2003
- Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- If **NO**, the operator was contacted contacted on: _____

6. (R649-9-2)Waste Management Plan has been received on: IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM-12/31/2003 BIA-12/5/02

8. **Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 02/27/2003

9. **Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: 01/09/2003

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

DATA ENTRY:

- 1. Changes entered in the **Oil and Gas Database** on: 03/26/2003
- 2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 03/26/2003
- 3. Bond information entered in RBDMS on: N/A
- 4. Fee wells attached to bond in RBDMS on: N/A

STATE WELL(S) BOND VERIFICATION:

1. State well(s) covered by Bond Number: RLB 0005236

FEDERAL WELL(S) BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: 158626364

INDIAN WELL(S) BOND VERIFICATION:

1. Indian well(s) covered by Bond Number: RLB 0005239

FEE WELL(S) BOND VERIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB 0005238

2. The **FORMER** operator has requested a release of liability from their bond on: N/A
The Division sent response by letter on: N/A

LEASE INTEREST OWNER NOTIFICATION:

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: N/A


COMMENTS:



Westport Oil and Gas Company, L.P.

DRILLING PROGRAM

COMPANY NAME Westport Oil and Gas Company, LP DATE May 28, 2003
 WELL NAME Glen Bench 22-2 TD 11,860' MD/TVD
 FIELD Natural Buttes COUNTY Uintah STATE Utah ELEVATION 5,003' GL 5,019' KB
 SURFACE LOCATION 1980' FSL, 660' FWL, NWSW, SEC. 22, T8S, R22E BHL Straight Hole
 OBJECTIVE ZONE(S) Wasatch, Meca Verda
 ADDITIONAL INFO Regulatory Agencies: BLM, UDOGM, Tri-County Health Dept.

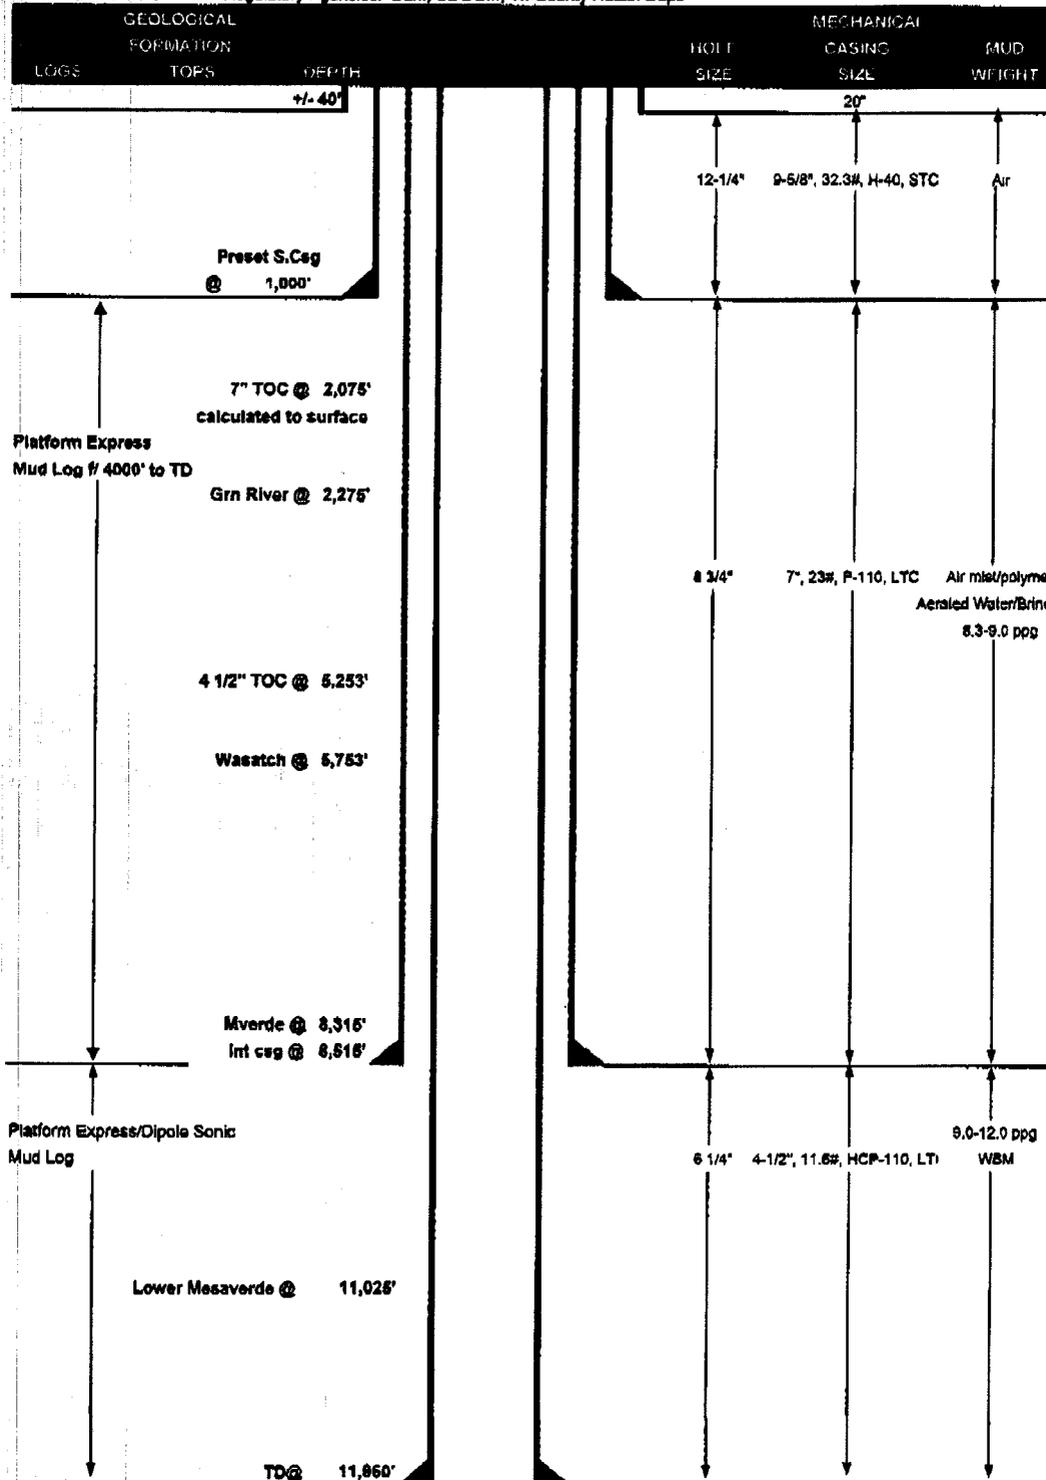



Westport Oil and Gas Company, L.P.

CASING PROGRAM

CONDUCTOR	SIZE	INTERVAL	WT	GR	CPLG	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	20"	0-40'				2,270	1,370	254,000
SURFACE	9-5/8"	0 to 1,000'	32.30	H-40	STC	1.07	2.93	9.01
INTERMEDIATE	7"	0 to 8,515'	23.00	HCP-110	LTC	1.80	1.42	3.45
PRODUCTION	4-1/2"	0 to 11,980'	11.60	HCP-110	LTC	2.21	1.16	2.30

- 1) Max Anticipated Surf. Press.(MASP) (Surface Casing) = (Pore Pressure at next csg point)-(0.22 psi/ft-partial evac gradient x TVD of next csg point)
 - 2) MASP (Int Casing) = Pore Pressure at Next Casing Point - (.22 psi/ft-partial evac gradient x TVD of next csg point)
 - 3) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft-partial evac gradient x TD)
- (Burst Assumptions: Max Pore Press @ Int shoe, YD = 9.0 ppg, 12.0 ppg EMW) .22 psi/ft = gradient for partially evac wellbore
 (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)

CEMENT PROGRAM

	FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	495	Class G + 2% CaCl ₂ + 0.25 pps Celloflake	200	35%	15.80	1.16
INTERMEDIATE	LEAD 5,253'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	380	70%	11.00	3.36
	TAIL 3,262'	50/50 Poz/G + 10% salt + 2% gel	850	70%	14.30	1.31
PRODUCTION	Lead 5,572'	Premium Lite II High Strength + 5 pps Kalseal + 3% KCl + 0.05 pps Static-free + 0.7% R-3 + 0.25 pps celloflake + 0.7% FL-52	380	60%	13.00	1.97
	Tail 1,135'	50/50 Poz/G + 3% gel + 0.6% FL-52 + 0.3% R-3 + 0.25 pps celloflake + 20% silica + 0.05 pps Static-free	130	60%	14.10	1.54

* or 15% over calliper log

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 ft. insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
INTERMEDIATE	Float shoe, 1 ft. float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.
PRODUCTION	Float shoe, 1 ft. float collar. Centralize first 3 joints & every third joint to top of cement with bow spring centralizers.

ADDITIONAL INFORMATION

Test casing head to 760 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 5M with one annular and 2 rams. Test to 5,000 psi (annular to 2,500 psi) prior to drilling out. Record on chart recorder & tear sheet. Function test rams on each trip. Maintain safety valve & inside ROP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.

Run Totco surveys every 2000'. Maximum allowable hole angle is 5 degrees.

DRILLING ENGINEER: _____
Brad Laney

DATE: _____

DRILLING SUPERINTENDENT: _____
Randy Bayne

DATE: _____



Westport Oil & Gas Company, L.P.

1368 S. 1200 E.

Vernal, Utah 84078

Phone: 435-789-4433 Fax: 435-789-4436

FAX COVER SHEET

DATE: 5/29/03

TO: Dustin Doucet @ FAX # _____

FROM: Cheryl Cameron @ FAX # 435-789-4436

PAGES (INCLUDING COVER): 3

Comments:

Dustin,
 Westport will most likely
 spud this well tomorrow!

RECEIVED

MAY 29 2003

OPERATOR WESTPORT O & G CO., L.P.
 ADDRESS P.O. BOX 1148
VERNAL, UTAH 84078

OPERATOR ACCT. NO. N 2115

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
A	99999	13793	43-047-34092	GLEN BENCH #22-2	NWSW	22	8S	22E	UINTAH	5/31/2003	5/31/2003

WELL 1 COMMENTS:
 MIRU BILL MARTIN JR. RAT HOLE SERVICES
 WELL SPUD ON 5/31/03 AT 6 AM.

CONFIDENTIAL

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		

WELL 2 COMMENTS:

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		

WELL 3 COMMENTS:

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		

WELL 4 COMMENTS:

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		

WELL 5 COMMENTS:

Post-It* Fax Note 7671 Date 6/2 # of pages 1

To <u>GRUPO MINERAL</u>	From <u>Sheila Upchurch</u>
Co./Dept. <u>DIVAN</u>	Co. <u>WESTPORT O&G CO. L.P.</u>
Phone # <u>801-575-4730</u>	Phone # <u>(435) 781-7024</u>
Fax # <u>801-359-3240</u>	Fax # <u>(435) 781-7094</u>

Sheila Upchurch
 Signature

REGULATORY ANALYST 06/02/03
 Title _____ Date _____

Phone No. (435) 781-7024

- ACTION CODES (See instructions on back of form)
- A - Establish new entity for new well (single well only)
 - B - Add new well to existing entity (group or unit well)
 - C - Re-assign well from one existing entity to another exist
 - D - Re-assign well from one existing entity to a new entity
 - E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.
 (3/89)

RECEIVED
 JUN 02 2003

JUN-02-2003 MON 09:51 AM EL PASO PRODUCTION
 FAX NO. 4357817094
 P. 01

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

CONFIDENTIAL

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
U-28652

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

7. If Unit or CA/Agreement, Name and/or No.
NATURAL BUTTES

8. Well Name and No.
GLEN BENCH 22-2

9. API Well No.
43-047-34092

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY L.P. Contact: SHEILA UPCHEGO
E-Mail: supchego@westportresourcescorp.com

3a. Address
P.O. BOX 1148
VERNAL, UT 84078

3b. Phone No. (include area code)
Ph: 435.781.7024
Fx: 435.781.7094

10. Field and Pool, or Exploratory
NATURAL BUTTES

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 22 T8S R22E NWSW 1980FSL 660FWL

11. County or Parish, and State
UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Well Spud
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

MIRU BILL MARTIN JR'S RAT HOLE DRILLING. DRILLED 12 1/4" HOLE TO 1030'. RAN 9 5/8" 32.3# H-40 ST&C CSG. CMT W/400 SX CLASS G + 2% CACL2 + .25 PPS CELLO FLAKE 84 BBLS SLURRY YEILD 1.16 CU/FT WT 15.8 GOOD CMT.

SPUD WELL ON 5/31/03 AT 6 AM.

JUN 17 2003

14. I hereby certify that the foregoing is true and correct.
Electronic Submission #22651 verified by the BLM Well Information System For WESTPORT OIL & GAS COMPANY L.P, sent to the Vernal

Name (Printed/Typed) SHEILA UPCHEGO Title REGULATORY ANALYST

Signature  Date 06/02/2003

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ****

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

CONFIDENTIAL

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other	5. Lease Serial No. U-28652
2. Name of Operator WESTPORT OIL & GAS COMPANY LP	6. If Indian, Allottee or Tribe Name
3a. Address P.O. BOX 1148 VERNAL, UT 84078	7. If Unit or CA/Agreement, Name and/or No.
3b. Phone No. (include area code) Ph: 435.781.7023 Fx: 435.781.7094	8. Well Name and No. GLEN BENCH FEDERAL 22-2
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 22 T8S R22E NWSW 1980FSL 660FWL	9. API Well No. 43-047-34092
10. Field and Pool, or Exploratory NATURAL BUTTES	11. County or Parish, and State UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Drilling Operations
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

CONTINUED DRLG OPERATIONS W/ CAZA, RIG #61 & DRILLED FROM 1000'-8125'. RIH W/ 8089' OF 7" 23# P-110 LT&C INTERMEDIATE CSG. LEAD CMT W/ 545 SX PLII + ADDITIVES MIXED @ 11 PPG W/ 3.38 YIELD. TAIL CMT W/ 950 SX 50/50 POZ MIXED @ 14.3 PPG W/ 1.31 YIELD.

RECEIVED

JUN 26 2003

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct.

**Electronic Submission #23644 verified by the BLM Well Information System
For WESTPORT OIL & GAS COMPANY LP, sent to the Vernal**

Name (Printed/Typed) CHERYL CAMERON	Title OPERATIONS
Signature (Electronic Submission)	Date 06/25/2003

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
Westport Oil & Gas Co., L.P.

3a. Address *P.O. Box 1148 Vernal, UT 84078* 3b. Phone No. (include area code) *(435) 781-7024*

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

NWSW SECTION 22-8S-22E 1980'FSL & 660'FWL

5. Lease Serial No.
UTU-28652

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
GLEN BENCH FEDERAL 22-2

9. API Well No.
43-047-34092

10. Field and Pool, or Exploratory Area
GLEN BENCH

11. County or Parish, State
UINTAH, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input type="checkbox"/> Other FINAL DRILLING OPERATIONS

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

FINISHED DRILLING FROM 1030' TO 11865'. RAN 4 1/2" 11.6# P-110 HC 8 RD CSG. CMT W/50 SX SCAVENGER, FOLLOWED BY 510 SX PREM LITE II + ADDS @ 13 PPG YIELD 1.97 CU/FT. FOLLOWED BY 104 SX + ADDS @15.8 PPG YIELD 1.36 CU/FT. FLOATS HELD.

RELEASED RIG ON 7/30/03 AT 24:00 HRS.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Sheila Upchego	Title Regulatory Analyst
Signature <i>Sheila Upchego</i>	Date July 30, 2003

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED

AUG 04 2003

DIV OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. UTU28652
2. Name of Operator WESTPORT OIL & GAS COMPANY, L.P.		6. If Indian, Allottee or Tribe Name
3a. Address P.O. BOX 1148, VERNAL, UTAH 84078	3b. Phone No. (include area code) (435)781-7060	7. If Unit or CA/Agreement, Name and/or No.
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) NWSW SEC 22-T8S-R22E 1980' FSL 660' FWL		8. Well Name and No. GLEN BENCH FEDERAL 22-2
		9. API Well No. 43-047-34092
		10. Field and Pool, or Exploratory Area GLEN BENCH
		11. County or Parish, State UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input checked="" type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomplate in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

THE SUBJECT WELL WAS PLACED ON SALES AT 11:40 AM ON 8/22/03
REFER TO THE ATTACHED CHRONOLOGICAL DRILLING AND COMPLETION HISTORY REPORT

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) DEBRA DOMENICI	Title ADMINISTRATIVE ASSISTANT
Signature <i>Debra Domenici</i>	Date August 25, 2003

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED

SEP 03 2003

DIV. OF OIL, GAS & MINING

WESTPORT OIL & GAS COMPANY, LP

CHRONOLOGICAL HISTORY

GLEN BENCH FEDERAL 22-2

UINTAH COUNTY, UT

DRILLING REPORT:

	SPUD	Surface Casing	Activity	Status
5/27/03			Building Loc. 95%	Caza 61
5/28/03			Building Location. 100%	Caza 61
5/29/03			Building Location. 100%	Caza 61
5/30/03			Building Location. 100%	Caza 61
6/2/03	5/31/03	9/5/8" @999'		WORT Caza 61
6/3/03	5/31/03	9/5/8" @999'		WORT Caza 61
6/4/03	5/31/03	9/5/8" @999'		WORT Caza 61
6/5/03	Rig: Caza 61 AFE: N/A WO Denver PTD:11960' NW/SW, 22-8S-22E Target: Wasatch, Mesa Verde, C/G Drlg AFE MS: 1399.6 AFETD: 11960 WI: 100% TD: 999' Csg. 9 5/8" @ 999' MW:8.4 SD:x/xx/03 DSS:0 MIRU Caza 61. 70% of rig on location			
6/6/03	TD: 999'	Csg. 9 5/8" @ 999'	MW:8.4 SD:x/xx/03	DSS:0
	MIRU Caza 61. 75% rigged up.			
6/9/03	TD: 1600'	Csg. 9 5/8" @ 999'	MW:8.4 SD:6/08/03	DSS:1
	RU Caza 61. NU & test BOPE.Drlg cement and FE. Drlg f/999'- 1600'. DA.			
6/10/03	TD: 3000'	Csg. 9 5/8" @ 999'	MW:8.4 SD:6/08/03	DSS:2
	Drlg from 1600'-3000'. DA.			
6/11/03	TD: 3900'	Csg. 9 5/8" @ 999'	MW:8.8 SD:6/08/03	DSS:3 Drlg
	from 3000'-3654'.TFNB and MM. Rig repair. TIH. Drlg to 3900'. DA.			
6/12/03	TD: 5000'	Csg. 9 5/8" @ 999'	MW:8.4 SD:6/08/03	DSS:4
	Drlg from 3900'-5000'. DA.			
6/13/03	TD: 5775'	Csg. 9 5/8" @ 999'	MW:8.4 SD:6/08/03	DSS:5
	Drlg from 5000'-5775'. DA.			
6/16/03	TD: 6475'	Csg. 9 5/8" @ 999'	MW:8.9 SD:6/08/03	DSS:8
	Drlg from 5775'5937'. Close in mud system. TFNB. Drlg to 6173'. TFMM. DA @ 6475'.			
6/17/03	TD: 6950'	Csg. 9 5/8" @ 999'	MW:9.0 SD:6/08/03	DSS:9
	Drlg from 6475'-6950'. DA.			

6/18/03	TD: 7450' Csg. 9 5/8" @ 999' MW:9.2 SD:6/08/03 DSS:10 Drlg from 6950'-7450'. DA.
6/19/03	TD: 7635' Csg. 9 5/8" @ 999' MW:9.2 SD:6/08/03 DSS:11 Drlg from 7450'-7635'. TFNB & MM. TIH @ report time.
6/20/03	TD: 7661' Csg. 9 5/8" @ 999' MW:9.3 SD:6/08/03 DSS:12 Drlg f/7635'7661'. Trip for PDC bit & MM. TIH to 7310. Tag Bridge. Wash and ream to bottom @ report time.
6/23/03	TD: 8125' Csg. 9 5/8" @ 999' MW:9.3 SD:6/08/03 DSS:15 Drlg from/7661'-8125' intermediate casing point. CCH. Run OH Logs. TIH. CCH for Casing.
6/24/03	TD: 8125' Csg. 9 5/8" @ 999' MW:9.5 SD:6/08/03 DSS:16 CCH for Casing. POOH. LDDP & DC. RU Casing Crew. Running 7" intermediate casing @ report time.
6/25/03	TD: 8125' Csg. 7" @ 8123' MW:9.5 SD:6/08/03 DSS:17 Run and cement 7" intermediate casing @8123'. Raise Stack to set pack-off. NU BOPE.
6/26/03	TD: 8150' Csg. 7" @ 8123' MW:9.3 SD:6/08/03 DSS:18 NU & Test BOPE. PU BHA and Drlg Pipe. Drlg cement and FE. Test formation to 11.6 EMW. Drlg to 8150'. DA.
6/27/03	TD: 8261' Csg. 7" @ 8123' MW:9.2 SD:6/08/03 DSS:19 Drlg f/8150'-8261'. TFNB & PU new Kelly.
6/30/03	TD: 8715' Csg. 7" @ 8123' MW:9.1 SD:6/08/03 DSS:22 Drlg from 8261'-8692'. TFNB. Drlg to 8692. DA.
7/1/03	TD: 8910' Csg. 7" @ 8123' MW:9.2 SD:6/08/03 DSS:23 Drlg from 8715'8910'-. DA.
7/2/03	TD: 9021' Csg. 7" @ 8123' MW:9.1 SD:6/08/03 DSS:24 Drlg from 8910'-8985'. TFNB & MM. Drlg to 9021'. DA
7/3/03	TD: 9215' Csg. 7" @ 8123' MW:9.0 SD:6/08/03 DSS:25 Drlgf/9021'-9215'. DA
7/7/03	TD: 9825' Csg. 7" @ 8123' MW:10.1 SD:6/08/03 DSS:29 Drlg from 9500'-9602'. TFNB. Drlg to 9755'. TFMM. Drlg to 9825'. DA
7/8/03	TD: 9975' Csg. 7" @ 8123' MW:10.2 SD:6/08/03 DSS:30 Drlg from 9825'-9846'. Work tight hole. Drlg to 9878'. Work tight hole. Drlg to 9975'. DA.
7/9/03	TD: 10068' Csg. 7" @ 8123' MW:10.3 SD:6/08/03 DSS:31 Drlgf/9846'10068'. Work tight hole. Slug pipe. POOH for new bit.
7/10/03	TD: 10125' Csg. 7" @ 8123' MW:10.6 SD:6/08/03 DSS:32 Finish TFNB. Drlg from 10068'-10125'. DA.

7/11/03 TD: 10242' Csg. 7" @ 8123' MW:10.4 SD:6/08/03 DSS:33
Drlg from 10125'-10242'. TFNB and MM.

7/14/03 TD: 10655' Csg. 7" @ 8123' MW:10.4 SD:6/08/03 DSS:33
Finish TFNB, MM and diamond bit. Drlg f/10242'-10655'. DA.

7/15/03 TD: 10707' Csg. 7" @ 8123' MW:10.9 SD:6/08/03 DSS:34
Drlg from 10655'-10695'. TFMM. RIH w/MM and Diamond Bit. Drlg to 10707'.
DA.

7/16/03 TD: 10750' Csg. 7" @ 8123' MW:10.9 SD:6/08/03 DSS:38
Drlg from 10707'-10719'. Trip for abnormal DP Pressure. LD Baker MM and
Diamond Bit. TIH with Button Bit and MM. Drlg from 10719'-10750'. DA.

7/17/03 TD: 10965' Csg. 7" @ 8123' MW:11.1 SD:6/08/03 DSS:39
Drlg from 10750'-10965'. DA.

7/18/03 TD: 11042' Csg. 7" @ 8123' MW:11.1 SD:6/08/03 DSS:39
Drlg from 10965'-11042'. TFNB & MM. TIH to 8344'. Lost returns. Pull up into
casing shoe. Mix and pump LCM pill. Building MW and 2nd LCM Pill.

7/21/03 TD: 11151' Csg. 7" @ 8123' MW:11.5 SD:6/08/03 DSS:43
Regained circulation after pumping LCM pills. Finish RIH w/ conv bit. Drlg
f/11042'-11151'. TFNB & MM. TIH and reamed 9356'-9450' and 10651'-10930'.
Became stuck @ 10930'. Pulled free and reamed f/ 10930'-11151'. DA.

7/22/03 TD: 11305' Csg. 7" @ 8123' MW:11.4 SD:6/08/03 DSS:44
Drlg from 11151'-11305'. DA.

7/23/03 TD: 11460' Csg. 7" @ 8123' MW:11.6 SD:6/08/03 DSS:45
Drlg from 11305'-11460'. DA. Show 11423'-11437'. 1250 u BBG, 11.5 ppg in 10.5
out.

7/24/03 TD: 11635' Csg. 7" @ 8123' MW:11.6 SD:6/08/03 DSS:46
Drlg from 11460'-11635'. DA.

7/25/03 TD: 11820' Csg. 7" @ 8123' MW:11.6 SD:6/08/03 DSS:47
Drlg from 11635'-11820'. DA.

7/28/03 TD: 11865' Csg. 7" @ 8123' MW:11.6 SD:6/08/03 DSS:50
Drlg f/11820'-11865' TD. Short Trip 18 stds. POOH . Pipe stuck @ 9507'. Run
Freepoint. Stuck @ bit. PU surface jars. Free pipe. Had tight hole from 9400' to
9289'. Finish TOH. LD mm and Diamond Bit. RIH to TD CCH for logs . POOH .
Run OH Logs and CBL. TIH for Conditioning trip.. DA.

7/29/03 TD: 11865' Csg. 7" @ 8123' MW:11.7 SD:6/08/03 DSS:51
Finish TIH. CCH. POOH & LDDP. RU and run 4 ½" Production Casing.

7/30/03 TD: 11865' Csg. 4 ½" @ 11850' MW:11.7 SD:6/08/03 DSS:52
Finish run 4 ½" Production Casing. Circ well. Lost returns. Build volume. Circ
btms up. RU cementers. Cement 4 ½" Production casing @ 11850'. ND BOPE. Set
Slips. Release rig @2400 hrs 7/29/03. Will move to G/B Fed # 21-2. Final Drlg
Report.

- 8/15/03** HELD SAFETY MEETING (ROAD RIG). ROAD RIG FROM NBU #352 TO GLEN BENCH FED #22-2. MIRU. SPOT EQUIP. CUTTERS RAN CBL-CCL-GR LOG PRIOR TO MOVING IN. LOGGED FROM 11,701' (PBSD) TO 450' ABV CMT TOP. CMT TOP @ 2850'. ALSO 10K BOP'S WERE INSTALLED & TST PRIOR TO MOVING IN & NU 10K MANIFOLD. RU FLOOR & TBG EQUIP. PU & RIH W/3 7/8" MILL, 244 JTS 2 3/8" N-80 TBG. (SLM) TBG WAS DRIFTED. EOT @ 7964'.
- 8/18/03** HELD SAFETY MEETING (PU TBG). EOT @ 7964'. FINISH PU & RIH W/2 3/8" N-80 TBG. (SLM) TBG WAS DRIFTED. TAG FILL @ 11,728'. (FLOAT COLLAR @ 11,846'). RU PMP & LINES. REV CIRC HOLE W/180 BBLs 3% KCL. POOH. LD 11 JTS. STAND BACK 174 STANDS TBG. LD MILL. PT 4 1/2" CSG & BOP TO 5000#. DOOR ON BOP LEAKED, CHANGE OUT DOOR ON BOP. RE-TEST BOP W/DBL JACK, TST TO 10,000#. RE-TEST CSG TO 5000#. MIRU CUTTERS. RIH W/3 3/8" PERF GUNS. PERF @ 11,617'-18', 4 SPF, 4 HOLES; 11,490-92', 4 SPF, 8 HOLES; 11,439'-43', 4 SPF, 16 HOLES. TOTAL 28 HOLES, 90 DEG PHASING, 0.43 GRAM PROSPECTOR CHARGES. POOH.
- 8/19/03** MIRU DOWELL. HELD SAFETY MEETING. PT SURF LINES TO 10,610#, WHP: 3650#. PERFS WERE BRK DN @ 4200# @ 1/2 BPM. ISIP: 3800#, FG: .77 W/RIG PMP. BALL OUT PERFS W/ (56) BIO-BALLS @ 14 BPM W/207 BBLs 3% KCL. SURGE BALLS OFF PERFS 3 TIMES & LET FALL TO BTM FOR 30 MIN. CALCULATED 21 PERFS OPEN. BRK DN PERFS AGAIN @ 5780# @ 20.4 BPM. ISIP: 4350#, FG: .81. PMP 5990 BBLs YF125LGD, 500,900# 20/40 SD. TAIL IN W/101,700# ECONOPROP. ISIP: 4550#, FG: .83, NPI: 200#, MTP: 9359#, ATP: 6424#, MTR: 50.2 BPM, ATR: 44.1 BPM. TAGGED W/IRIDIUM ON 20/40 SD & SCANDIUM ON ECONOPROP. TOTAL SD: 602,600#, TOTAL FLU: 5990 BBLs. OPEN WELL USING FORCED CLOSURE FLOW BACK. BEGIN PRESS OF 4550#. FLOW BACK 10 BBLs @ 1/2 BPM ON 11/64" CHK FOR 20 MIN W/4200# FINAL CLOSURE PRESS. SWI. RDMO DOWELL. INSTALL 10K NIGHT CAP. PREP TO SET KILL PLUG IN AM. 4 PM SDFN.
- 8/20/03** HELD SAFETY MEETING. PWR SWVL, WASHINGTON STRIPPING HEAD. WHP: 3400#. MIRU CUTTERS. RIH W/4 1/2" BAKER CBP & SET @ 11,350'. BLEED OFF PRESS. POOH. RDMO CUTTERS. RIH W/3 7/8" BIT. PMP OFF BIT SUB, SN & 2 3/8" N-80 TBG. EOT @ 11,300'. RU SWVL. EST CIRC W/3% KCL W/RIG PMP. DRILLING CBP @ 11,350'. DRILL THROUGH CBP IN 20 MIN, 2200# DIFF. RIH. TAG SD @ 11,484'. CO SD TO 11,728'. CO 244' SD. DRILLED OUT CMT TO 11,792' (64' CMT), 174' RATHOLE. CIRC WELL CLEAN. LD SWVL. POOH. LD 12 JTS ON FLOAT. PUH & LAND TBG ON HANGER W/349 JTS 2 3/8" N-80 TBG. EOT @ 11,410.35', SN @ 11408.25'. NDBOP. NUWH. DROP BALL. PMP OFF BIT @ 3600# FLOW WELL BACK ON 10/64" CHK TO PIT. FTP: 2500#, SICP: 3000#.
- 8/21/03** FLOW BACK REPORT: ACTUAL FLOW RATE: 1300 MCFD, ADJUSTED FLOW RATE FOR WTR: 500 MCFD, CP: 2900#, TP: 2500#, 10/64" CHK, 15 BWPH, SD: CLEAN, 24 HRS, LIGHT GAS, 426 BW, LLTR: 4650 BBLs.
- 8/22/03** FLOW BACK REPORT: ACTUAL FLOW RATE: 1300 MCFD, ADJUSTED FLOW RATE FOR WTR: 750 MCFD, CP: 2250#, TP: 1150#, 14/64" CHK, 10 BWPH, 24 HRS, SD: TRACE, 496 BW, LLTR: 2464 BBLs.
- 8/25/03** WELL WENT ON SALES 8/22/03, 11:40 AM. 400 MCF, FTP: 2900#, SICP: 3300#, 20 BWPH, 18/64" CHK.

ON SALES

8/23/03: 170 MCF, 0 BC, 463 BW, TP: 400#, CP: 1900#, 18/64" CHK, 20 HRS, LP: 90#.
 8/24/03: 180 MCF, 0 BC, 189 BW, TP: 120#, CP: 600#, 20/64" CHK, 10 HRS, LP: 92#.

28b. Production - Interval C

Date First Produced 08/22/2003	Test Date 11/18/2003	Hours Tested 24	Test Production →	Oil BBL 0.0	Gas MCF 2491.0	Water BBL 85.0	Oil Gravity Corr. API	Gas Gravity	Production Method FLOWS FROM WELL
Choke Size 25/64	Tbg. Press. Flwg. 406 SI	Csg. Press. 1320.0	24 Hr. Rate →	Oil BBL 0	Gas MCF 2491	Water BBL 85	Gas:Oil Ratio	Well Status PGW	

28c. Production - Interval D

Date First Produced 08/22/2003	Test Date 11/18/2003	Hours Tested 24	Test Production →	Oil BBL 0.0	Gas MCF 2491.0	Water BBL 85.0	Oil Gravity Corr. API	Gas Gravity	Production Method FLOWS FROM WELL
Choke Size 25/64	Tbg. Press. Flwg. 406 SI	Csg. Press. 1320.0	24 Hr. Rate →	Oil BBL 0	Gas MCF 2491	Water BBL 85	Gas:Oil Ratio	Well Status PGW	

29. Disposition of Gas(Sold, used for fuel, vented, etc.)
SOLD

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
WASATCH	5750	8218			
MESAVERDE	8218	10909			
CASTLEGATE A	10909	11230			
MANCOS	11230	11406			
BLACK HAWK	11406	11406			

32. Additional remarks (include plugging procedure):

RU CUTTERS RIH W/4 1/2" CIBP SET @11,350' W/1 SX CMT ON TOP PMP 20 BBLs 3% KCL.

33. Circle enclosed attachments:

- 1. Electrical/Mechanical Logs (1 full set req'd.)
- 2. Geologic Report
- 3. DST Report
- 4. Directional Survey
- 5. Sundry Notice for plugging and cement verification
- 6. Core Analysis
- 7 Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions):

**Electronic Submission #25504 Verified by the BLM Well Information System.
For WESTPORT OIL & GAS COMPANY L.P, sent to the Vernal**

Name (please print) SHEILA UPCHEGO Title REGULATORY ANALYST

Signature  Date 11/25/2003

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

U-28652

Lease Serial No.

GLEN BENCH #22-2**NW/SW SEC. 22, T8S, R22E****API # 43-047-34092**ITEM# 25, 26 & 27

INTERVAL	SIZE	NUMBER
L. MESAVERDE/WASATCH		
11439'- 11617'		28 HOLES
10805'-10552'		140 HOLES
10436'-10336'		
10062'-10068'		36 HOLES
9302'-9318'		64 HOLES
9125'-9131'		36 HOLES
8997'-9014'		65 HOLES
6636' -6658'		88 HOLES

DEPTH INTERVAL**AMOUNT & KIND OF MATERIAL**

11439'-11617'	5990 BBLs YF125LGD 500,900# 20/40 SD TAIL IN 101,700# ECONO PROP
10805'-10552'	PMP 150 GAL 15% HCL 1.3 SG BALLS FLUSH PMP 170 BBLs 3% KCL
10436'-10336'	PMP 3.5 BBLs 3% KCL FRAC W/92,000# 20/40 SD W/YF120 ST
10062'-10068'	FRAC W/66,500# 20/40 SD W/YF120ST
9302'-9318'	FRAC W/30,000# 20/40 SD W/YF118ST
9125'-9131'	FRAC W/84,000# 20/40 SD W/YF118ST
8997'-9014'	DID NOT FRAC THIS ZONE
6636'-6658'	FRAC W/187,060# 20/40 SD W/118ST FLUSH W/102 BBLs KCL. 4769 BBLs TTL SD 459,960#

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU28652

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

8. Well Name and No.
GLEN BENCH FEDERAL 22-2

9. API Well No.
43-047-34092

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY L.P
Contact: SHEILA UPCHEGO
E-Mail: supchego@westportresourcescorp.com

3a. Address
1368 SOUTH 1200 EAST
VERNAL, UT 84078
3b. Phone No. (include area code)
Ph: 435.781.7024
Fx: 435.781.7094

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 22 T8S R22E NWSW 1980FSL 660FWL

10. Field and Pool, or Exploratory
GLEN BENCH

11. County or Parish, and State
UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Workover Operations
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

THE SUBJECT WELL LOCATION WAS PLACED BACK ONTO SALES ON 5/12/04.

PLEASE REFER TO THE ATTACHED CHRONOLOGICAL WELL HISTORY.

14. I hereby certify that the foregoing is true and correct.
Electronic Submission #31135 verified by the BLM Well Information System
For WESTPORT OIL & GAS COMPANY L.P, sent to the Vernal

Name (Printed/Typed) SHEILA UPCHEGO

Title REGULATORY ANALYST

Signature

Date 05/25/2004

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

RECEIVED

JUN 03 2004

DIV. OF OIL, GAS & MINING

WESTPORT OIL & GAS COMPANY, LP

CHRONOLOGICAL HISTORY

GLEN BENCH FEDERAL 22-2

UINTAH COUNTY, UT

WORKOVERS/RE-COMPLETIONS

- 3/22/04 OPEN WELL UP BLOW DN, PMP 10 BBL 2% KCL DN TBG PRES UP TO 2000#, BLED OFF. ND WH, NU BOP RU FLOOR & TBG EQUIP. PU & POOH W/TBG. POOH W/140 STDS PMP 70 BBL 2% DN CSG FINISH POOH W/TBG LD PMP OFF BS & 1.78' R NIPPLE. BTN APPROX 300' TBG HEAVY SCALE IN I.D. POOH W/ 308 TOT STANDS R NIPPLE 1 STND 2 3/8" & PMP OFF BS. MIRU CUTTER WL, RIH W/GAUGE RING TO CHECK FOR BRIDGES. POOH W/GR. RIH W/4 1/2" CIBP, SET @ 10,760'. POOH KILL WELL W/30 BBL 2%. RIH W/DMP BAILER & 25X CMNT DMP ON CIBP. POOH W/WL TOOLS RD CUTTERS. NU STRIPPING HD CLOSE RAMS. PUT WELL ON PRODUCTION UP CSG FOR WKND, NOTIFY PRODUCTION. SDFWE.
- 3/23/04 HELD SAFETY MEETING. HIGH PRESS PMPS. FCP: 305#. BLEW WELL DN. KILL WELL W/ 80 BBL 2% KCL. RIH W/ 5 STANDS THAT WERE SCALED UP ON INSIDE. POOH & LD 10 JTS. FOUND BUMPER SPRING STUCK IN 4TH JT OFF BTM. RIH W/ 4 1/2" RBP, ON -OFF TOOL, 4' PUP JT & PKR, 1 JT, 1.78" R NIPPLE & 320 JTS 2 3/8" N-80 TBG. KILL WELL 2X W/ 10 BBL EA TIME WHILE RIH. SET RBP @ 10,490'. UNABLE TO GET OFF RBP. PMP 20 BBL DN TBG. WORK TBG. RU SWVL, WORK TBG, TRYING TO RLS RBP W/ RIGHT HAND TORQUE. WOULD NOT RLS & UNABLE TO GET OFF RBP. (PKR MAY BE SET) CONSULT W/ ENG. DECISION WAS TO CHEM CUT TBG OFF @ 4' SUB BETWEEN PLUG & PKR. LEAVE CSG OPEN TO SALES. SHUT IN TBG.
- 3/24/04 HELD SAFETY MEETING. WIRELINE WORK. SITP: 100#, FCP: 300#. WELL MADE 128 BBL & 520 MCF IN 15 HRS, FLOWING UP CSG OVERNIGHT W/ RBP SET @ 10,490'. BLEW WELL DN. MIRU CUTTERS WL. RIH W/ CHEM CUT TOOLS & CHEM CUT TBG @ 10,483'. (3' STUB LOOKING UP) POOH W/ TOOLS. PULL UP & WORK TBG. PKR STUCK. FILL ON TOP OF PKR. COULD NOT GET PKR FREE. CONSULT W/ENG. DECISION WAS TO CHEM CUT TBG ABV PKR. RIH W/ CHEM CUT TOOLS & CHEM CUT TBG @ 10,465'. PMPG 60 BBL DN TBG. (10' STUB LOOKING UP) POOH W/ TOOLS. RDMO CUTTERS. POOH. STANDING BACK 320 JTS 2 3/8" N-80 TBG. LD SN & CUT JT. KILL WELL 2X W/ 80 BBL 2% KCL WHILE POOH. RIH W/ 3 7/8" X 3.16' SHOE, 3 3/4" X 5.80' WASH PIPE, 3 3/4" X 6.01' WASH PIPE, 3 1/4" X 1.95' TOP SUB, 3 1/16" X 5.70' BOWEN LBS, 3 1/16" X 5.65' BOWEN JAR, 2 3/8" X 8.02' TBG SUB & 200 JTS 2 3/8" N-80 TBG. EOT @ 6562'. 4:30 PM SWI, SDFN. PREP TO WASH OVER & RETREIVE PKR W/ AIR FOAM UNIT IN AM.
- 3/25/04 HELD SAFETY MEETING. AIR FOAM UNITS. SITP: 500#, SICP: 800#. EOT @ 6562'. BLEW WELL DN. KILL TBG W/ 20 BBL 2% KCL. RIH W/ TBG TO 10,423'. RU SWVL & AIR FOAM UNIT. EST CIRC. RIH, TAG SD @ 10,436'. CO 40' SD TO

TOP OF PKR @ 10,476'. CIRC WELL, GETTING HEAVY TO MEDIUM SD IN RETURNS MOST ALL DAY. 4:30 PM SHUT AIR FOAM UNIT DN, START TO PMP 25 BBLs EZ MUD PILL AROUND FISH. TBG GOT STUCK, WORK TBG FREE. PU & CIRC CLEAN. RIH, TAG SD @ 10,456'. CO 20' SD TO TOP OF PKR @ 10476'. CIRC WELL AS CLEAN AS POSSIBLE W/ AIR FOAM UNIT. PMP & SPOT 25 BBL EZ MUD PILL AROUND FISH TO 8876'. LD 2 JTS & STAND BACK 59 STANDS, EOT @ 6562'--- ABV TOP PERFS. 8:00 PM SWI, SDFN. LTR: 110 BBLs.

3/26/04

HELD SAFETY MEETING. BLOWING WELLS DN. SICP: 1000#, SITP: 1000#. BLEW WELL DN ON 32/64 CHK. KILL TBG W/ 25 BBLs 2% KCL. POOH W/ EOT @ 2500'. KILL WELL W/ 100 BBLs 2% KCL. FINISH POOH. STANDING BACK TBG. LD BHA. RIH W/ 3 7/8" OVERSHOT, LBS, JAR, (4) 3 1/8" DRILL COLLARS, ACCELERATOR, PUP JT, 1.78" "R" NIPPLE ON 2 3/8" N-80 TBG. TAG SD BRIDGE @ 10,468'. RIH TO TOP OF PKR. CIRC WELL CLEAN W/ AIR FOAM UNIT. LATCH ON TO FISH. POOH. STANDING BACK TBG W/ EOT @ 2000'. KILL WELL W/ 80 BBLs 2% KCL. FINISH POOH. LD BHA & PKR.

3/29/04

HELD SAFETY MEETING. FISHING TOOLS & PRESS. SICP: 900#. BLEW WELL DN ON 32/64 CHOKE. KILL WELL W/ 80 BBLs 2% KCL. RIH W/ 3 7/8" OS & EXT, LBS, JAR, (4) 3 1/8" DRILL COLLARS, ACCELERATOR, XO SUB, 2 3/8" PUP JT, 1.78" "R" NIPPLE, ON 2 3/8" N-80 TBG. TAG SD @ 10,466. BRK CIRC W/ AIR FOAM UNIT. CO 33' SD TO TOP OF FISH. CIRC WELL CLEAN. LATCH ON TO RBP & RLS. 50# DIFF. POOH. & LD 18 JTS & STAND BACK 149 STDS & LD 1 SINGLE. LD BHA & RBP. RDMO FOAM UNIT. LTR: 148 BBLs. 5:30 PM SWI, SDFWE. PREP TO RIH W/ PROD TBG ON MONDAY 3/29/04. RIG MAY COME BACK TO WELL ON LATER DATE TO TST UPPER ZONES W/ PLUG & PKR AFTER SD CLEANS UP. PUMPER WILL OPEN CSG TO SALES IN AM.

3/30/04

HELD SAFETY MEETING. RIH W/ TBG. FCP: 221#. BLEW WELL DN. RIH W/ 2 3/8" MULE SHOE, 1 JT, "R" NIPPLE, & 352 JTS 2 3/8" N-80 TBG. LAND TBG ON HANGER. EOT @ 9911.91', "R" NIPPLE @ 9876.23'. RD FLOOR & TBG EQUIP. NDBOP, NUWH. RD RIG, RACK EQUIP. 12 NOON LEAVE WELL SI TO BUILD PRESS. FINAL REPORT. ROAD RIG TO OURAY SWD#1. LTR: 0 BBLs.

5/12/04

HELD SAFETY MEETING. RU RIG. ROAD RIG FROM G.B.#822-27I TO G.B.#22-2. MIRU. FCP=200#. BLEW WELL DN. WAIT ON DALBO FOR WATER. R/U HOT OILER & PMP 30 BBLs DN TBG. EOT @ 9911.91' NDWH, NUBOP, R/U FLOOR & TBG EQUIP. P.O.O.H. & L/D 19 JTS ON LOCATION. LAND TBG ON HANGER W/ 284 JTS 2-3/8" N-80 TBG. EOT @ 9292.16', DELSCO "R" NIPPLE @ 9256.48'. NDBOP, NUWH. SICP=350. R/D RIG. 3PM LEAVE WELL S.I. TO BUILD PRESSURE. ROAD RIG TO NBU#98V TO STEAM OFF RIG IN AM. 5:30 PM SDFN.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
MULTIPLE WELLS- SEE ATTACHED

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
MULTIPLE WELLS- SEE ATTACHED

8. Well Name and No.
MULTIPLE WELLS- SEE ATTACHED

9. API Well No.
MULTIPLE WELLS- SEE ATTACHED

10. Field and Pool, or Exploratory Area
GLEN BENCH

11. County or Parish, State
UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY, L.P.

3a. Address
1368 SOUTH 1200 EAST, VERNAL, UTAH 84078

3b. Phone No. (include area code)
435-781-7060

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
MULTIPLE WELLS- SEE ATTACHED

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>VARIANCE</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

Westport Oil & Gas requests a variance to Onshore Order No. 4, Part III C. a. requiring each sales tank be equipped with a pressure- vacuum thief hatch and/or vent line valve. The variance is requested as an economic analysis shows the value of the shrunk condensate will not payout the incremental cost of purchasing and maintaining the valve resulting in a loss of value over the producing life of the well.

The volume lost to shrinkage by dropping the tank pressure from 6 ozs. To 0 psig is shown to be 0.3% of the tank volume. This was determined by lab analysis of a representative sample from the field. The sample shrunk from 98.82% of original volume to 98.52% when the pressure was dropped. The average well produces approximately 6 bbls condensate per month. The resulting shrinkage would amount to 0.56 bbls per month lost volume due to shrinkage. The value of the shrunk and lost condensate does not recoup or payout the cost of installing and maintaining the valves and other devices that hold the positive tank pressure. An economic run based on the loss and costs is attached. Westport Oil & Gas requests approval of this variance in order to increase the value of the well to the operator and the mineral royalty owners.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) DEBRA DOMENICI	Title ENVIRONMENTAL ASSISTANT
Signature <i>Debra Domenici</i>	Date July 9, 2004

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title Accepted by the Utah Division of Oil, Gas and Mining	Date	Federal Approval Of This Action Is Necessary
-------------	--	------	---

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY, L.P.

3a. Address
1368 SOUTH 1200 EAST, VERNAL, UTAH 84078

3b. Phone No. (include area code)
435-781-7060

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
MULTIPLE WELLS- SEE ATTACHED

5. Lease Serial No.
MULTIPLE WELLS- SEE ATTACHED

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
MULTIPLE WELLS- SEE ATTACHED

8. Well Name and No.
MULTIPLE WELLS- SEE ATTACHED

9. API Well No.
MULTIPLE WELLS- SEE ATTACHED

10. Field and Pool, or Exploratory Area
GLEN BENCH

11. County or Parish, State
UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>VARIANCE</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

Westport Oil & Gas requests a variance to Onshore Order No. 4, Part III C. a. requiring each sales tank be equipped with a pressure- vacuum thief hatch and/or vent line valve. The variance is requested as an economic analysis shows the value of the shrunk condensate will not payout the incremental cost of purchasing and maintaining the valve resulting in a loss of value over the producing life of the well.

The volume lost to shrinkage by dropping the tank pressure from 6 ozs. To 0 psig is shown to be 0.3% of the tank volume. This was determined by lab analysis of a representative sample from the field. The sample shrunk from 98.82% of original volume to 98.52% when the pressure was dropped. The average well produces approximately 6 bbls condensate per month. The resulting shrinkage would amount to 0.56 bbls per month lost volume due to shrinkage. The value of the shrunk and lost condensate does not recoup or payout the cost of installing and maintaining the valves and other devices that hold the positive tank pressure. An economic run based on the loss and costs is attached. Westport Oil & Gas requests approval of this variance in order to increase the value of the well to the operator and the mineral royalty owners.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) DEBRA DOMENICI	Title ENVIRONMENTAL ASSISTANT
Signature <i>Debra Domenici</i>	Date July 9, 2004

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title Accepted by the Utah Division of Oil, Gas and Mining	Date	Federal Approval Of This Action Is Necessary
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.			

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

COPY SENT TO OPERATOR
 Date: **2-16-04**
 Initials: **CHD**

By: *[Signature]* RECEIVED
JUL 14 2004

Westport Oil & Gas, L.P.
Project Economics Worksheet

Instructions: Fill in blue boxed areas with before and after project data. The evaluation results are shown below and graphed automatically at the bottom of the page. This sheet is protected to prevent accidental alteration of the formulas. See JTC for changes. OPX entered as annual costs and/or as unit OPX costs for \$/BF and \$/MCF

Project Name: **Condensate Shrinkage Economics**

Is this job a well pull or production rig job ??? **N** (Y or N)

	BEFORE \$/Year	AFTER \$/Year	DIFFERENCE \$/Year
Gross Oil Revenue	\$1,088	\$1,099	\$11
Gross Gas Revenue	\$0	\$0	\$0
NGL Revenue	\$0	\$0	\$0
PULING UNIT SERVICE			\$0
WIRELINE SERVICE			\$0
SUBSURF EQUIP REPAIRS			\$0
COMPANY LABOR			\$0
CONTRACT LABOR	\$0	\$200	\$200
CONTR SERVICE			\$0
LEASE FUEL GAS	\$0	\$0	\$0
UTILITIES - ELECTRICITY	\$0	\$0	\$0
CHEMICAL TREATING			\$0
MATERIAL & SUPPLY	\$0	\$150	\$150
WATER & HAULING			\$0
ADMINISTRATIVE COSTS			\$0
GAS PLANT PROCESSING			\$0
Totals	\$0	\$350	\$350

Increased OPX Per Year

Investment Breakdown:

Capital \$	Cap/Exp Code	Cost, \$	Oil Price	\$/BO
Expense \$	820/830/840	\$1,200	\$ 23.00	\$/BO
Total \$	830/860	\$0	\$ 3.10	\$/MCF
		\$1,200	\$ -	\$/ HP / day
			\$ 2.00	\$/BF
			\$ 0.62	\$/MCF

Production & OPX Detail:

	Before	After	Difference
Oil Production	0.192 BOPD	0.194 BOPD	0.002 BOPD
Gas Production	0 MCFPD	0 MCFPD	0 MCFPD
Wtr Production	0 BWPD	0 BWPD	0 BWPD
Horse Power	HP	HP	HP
Fuel Gas Burned	MCFPD	MCFPD	MCFPD

<p>Project Life: Life = 20.0 Years (Life no longer than 20 years)</p> <p>Internal Rate of Return: After Tax IROR = #DIV/0!</p> <p>AT Cum Cashflow: Operating Cashflow = (\$2,917) (Discounted @ 10%)</p>	<p>Payout Calculation: Payout = $\frac{\text{Total Investment}}{\text{Sum(OPX + Incremental Revenue)}} = 1$</p> <p>Payout occurs when total AT cashflow equals investment See graph below, note years when cashflow reaches zero</p> <p>Payout = NEVER Years or #VALUE! Days</p>
--	--


Gross Reserves:

Oil Reserves =	6 BO
Gas Reserves =	0 MCF
Gas Equiv Reserves =	38 MCFE

Notes/Assumptions:

An average NBU well produces 0.192 bcpd with no tank pressure. The production is increased to 0.196 bcpd if 6 ozs of pressure are placed on the tank. The increased production does not payout the valve cost or the estimated annual maintenance costs.

Project: Condensate Shrinkage Economics

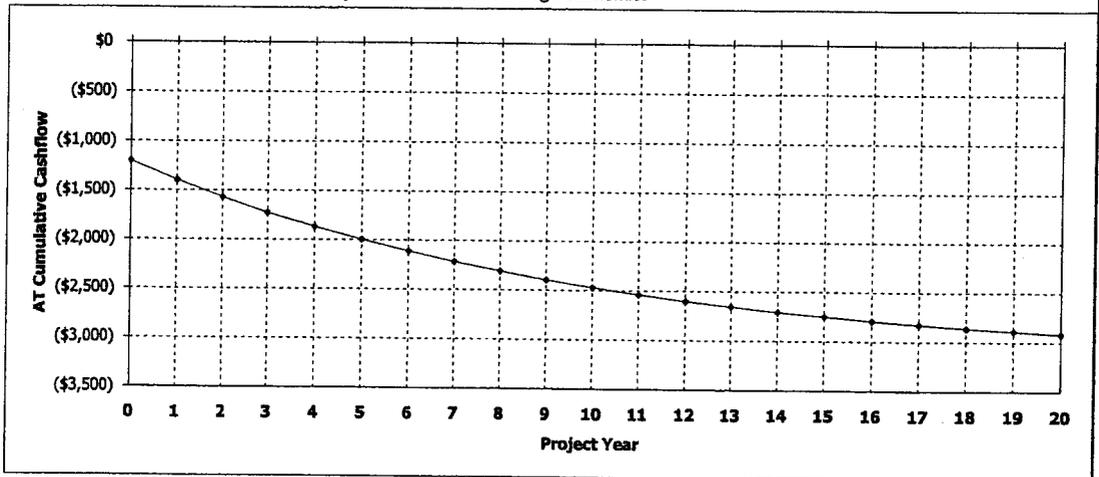

Westport Oil and Gas, Inc.
NBU/Ouray Field
RFL 2003-022

COMPARISON OF FLASH BACK PRESSURES

Calculated by Characterized Equation-of-State

Flash Conditions		Gas/Oil Ratio (scf/STbbl) (A)	Specific Gravity of Flashed Gas (Air=1.000)	Separator Volume Factor (B)	Separator Volume Percent (C)
psig	°F				

Calculated at Laboratory Flash Conditions

80	70			1.019	
0	122	30.4	0.993	1.033	101.37%
0	60	0.0	—	1.000	98.14%

Calculated Flash with Backpressure using Tuned EOS

80	70			1.015	
6.0 oz	65	24.6	0.777	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
4.0 oz	65	24.7	0.778	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
2.0 oz	65	24.7	0.779	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
0	65	24.8	0.780	1.003	98.82%
0	60	0.0	—	1.000	98.52%

(A) Cubic Feet of gas at 14.696 psia and 60 °F per Barrel of Stock Tank Oil at 60 °F.

(B) Barrels of oil at indicated pressure and temperature per Barrel of Stock Tank Oil at 60 °F.

(C) Oil volume at indicated pressure and temperature as a percentage of original saturated oil volume.

Note: Bubblepoint of sample in original sample container was 80 psig at 70° F with 1 cc water

ALL WELLS ROCKY MOUNTAIN GAS- GLEN BENCH ENARDO VARIANCE

WELL	LEGALS	STF LEASE NO	CA NUMBER	API NO
FEDERAL 24-22	SESW SEC 22, T9S, R22E	UTU28652	UTU28652	4304730610
GLEN BENCH FED 21-02	SESE SEC. 21, T8S, R22E	U-28652		4304734091
GLEN BENCH FED 22-02	NWSW SEC 22, T8S, R22E	UTU28652	UTU28652	4304734092
GLEN BENCH FED 822-27H	SENE SEC 27, T8S, R22E	UTU28652		4304735123
GLEN BENCH FED 822-27I	NESE SEC 27, T8S, R22E	UTU28652		4304735236
GLENN BENCH FED 22-03	NWSE SEC 22, T8S, R22E	UTU28652	UTU28652	4304734093
GLENN BENCH FED 23-21	NESW SEC 21, T8S, R22E	UTU28652	UTU28652	4304731007
GLENN BENCH FED 34-27	SWSE SEC 27, T8S, R22E	UTU28652	UTU28652	4304731022

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU28652

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
GLEN BENCH FEDERAL 22-2

9. API Well No.
43-047-34092

10. Field and Pool, or Exploratory
GLEN BENCH

11. County or Parish, and State
UINTAH COUNTY, UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY L.P
Contact: SHEILA UPCHEGO
E-Mail: supcheگو@westportresourcescorp.com

3a. Address
1368 SOUTH 1200 EAST
VERNAL, UT 84078
3b. Phone No. (include area code)
Ph: 435.781.7024
Fx: 435.781.7094

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 22 T8S R22E NWSW 1980FSL 660FWL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Workover Operations
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

7/2/04: 150# ON WELL. BLOW WELL DN. PMP 40 BBLS DN TBG. KILL WELL. NDWH NUBOP. UNLAND TBG. POOH LD 83 JTS 2 3/8" TBG. FOOTAGE LD 2706.80 RELAND TBG, 200 JTS ABOVE R-NIPPLE NEW EOT @6585.56 NDBOP. NUWH OPEN TBG TO SEP.

14. I hereby certify that the foregoing is true and correct.
**Electronic Submission #36796 verified by the BLM Well Information System
For WESTPORT OIL & GAS COMPANY L.P, sent to the Vernal**

Name (Printed/Typed) SHEILA UPCHEGO Title REGULATORY ANALYST

Signature  (Electronic Submission) Date 09/28/2004

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

RECEIVED
OCT 04 2004
DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU28652

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

8. Well Name and No.
GLEN BENCH FEDERAL 22-2

9. API Well No.
43-047-34092

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY L.P. Contact: SHEILA UPCHEGO
E-Mail: supchego@westportresourcescorp.com

3a. Address
1368 SOUTH 1200 EAST
VERNAL, UT 84078

3b. Phone No. (include area code)
Ph: 435.781.7024
Fx: 435.781.7094

10. Field and Pool, or Exploratory
GLEN BENCH

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 22 T8S R22E NWSW 1980FSL 660FWL

11. County or Parish, and State
UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Workover Operations
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

7/2/04: 150# ON WELL. BLOW WELL DN. PMP 40 BBLs DN TBG. KILL WELL. NDWH NUBOP. UNLAND TBG. POOH LD 83 JTS 2 3/8" TBG. FOOTAGE LD 2706.80 RELAND TBG, 200 JTS ABOVE R-NIPPLE NEW EOT @6585.56 NUBOP. NUWH OPEN TBG TO SEP.


RECEIVED

OCT 05 2004

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct.
Electronic Submission #36796 verified by the BLM Well Information System For WESTPORT OIL & GAS COMPANY L.P., sent to the Vernal

Name (Printed/Typed) SHEILA UPCHEGO Title REGULATORY ANALYST

Signature  (Electronic Submission) Date 09/28/2004

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING

1. DJJ
2. CDW

X Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective: **1/6/2006**

FROM: (Old Operator): N2115-Westport Oil & Gas Co., LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024	TO: (New Operator): N2995-Kerr-McGee Oil & Gas Onshore, LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024
---	--

WELL NAME	CA No.	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
-----------	--------	-----	-----	-----	--------	-----------	------------	-----------	-------------

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- If **NO**, the operator was contacted on: _____
- (R649-9-2)Waste Management Plan has been received on: IN PLACE
- Inspections of LA PA state/fee well sites complete on: n/a
- Reports current for Production/Disposition & Sundries on: ok
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet
- Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006
- Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: n/a
- Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: _____

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 5/15/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
- Bond information entered in RBDMS on: 5/15/2006
- Fee/State wells attached to bond in RBDMS on: 5/16/2006
- Injection Projects to new operator in RBDMS on: _____
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: CO1203
- Indian well(s) covered by Bond Number: RLB0005239
- (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG
The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

COMMENTS:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

8. Well Name and No.
MUTIPLE WELLS

2. Name of Operator
KERR-McGEE OIL & GAS ONSHORE LP

9. API Well No.

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

10. Field and Pool, or Exploratory Area

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEE ATTACHED

11. County or Parish, State
UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006. KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

RECEIVED

MAY 10 2006

DIV. OF OIL, GAS & MINING

BLM BOND = C01203
BIA BOND = RLB0005239

APPROVED 5116106

Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)
RANDY BAYNE
Signature
Randy Bayne

Title
DRILLING MANAGER
Date
May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office _____

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

WESTPORT OIL & GAS COMPANY L.P.

3a. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED

8. Well Name and No.

MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State

UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

APPROVED 5/16/06
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

RECEIVED
MAY 10 2006

~~DIV. OF OIL, GAS & MINING~~

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

BRAD LANEY

Title

ENGINEERING SPECIALIST

Signature

Date

May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Brad Laney

Title

Date

5-9-06

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
Colorado State Office
2850 Youngfield Street
Lakewood, Colorado 80215-7076

IN REPLY REFER TO:

CO922 (MM)
3106
COC017387 et. al.

March 23, 2006

NOTICE

Kerr-McGee Oil & Gas Onshore L.P. :
1999 Broadway, Suite 3700 : Oil & Gas
Denver, CO 80202 :

Merger/Name Change - Recognized

On February 28, 2006 this office received acceptable evidence of the following mergers and name conversion:

Kerr-McGee Oil & Gas Onshore L.P., a Delaware Limited Partnership, and Kerr-McGee Oil & Gas Onshore LLC, a Delaware Limited Partnership merger with and into Westport Oil and Gas Company L.P., a Delaware Limited Partnership, and subsequent Westport Oil & Gas Company L.P. name conversion to Kerr-McGee Oil & Gas Onshore L.P.

For our purposes the merger and name conversion was effective January 4, 2006, the date the Secretary of State of Delaware authenticated the mergers and name conversion.

Kerr-McGee Oil & Gas Onshore L.P. provided a list of oil and gas leases held by the merging parties with the request that the Bureau of Land Management change all their lease records from the named entities to the new entity, Kerr-McGee Oil & Gas Onshore L.P. In response to this request each state is asked to retrieve their own list of leases in the names of these entities from the Bureau of Land Management's (BLM) automated LR2000 data base.

The oil and gas lease files identified on the list provided by Kerr-McGee Oil & Gas Onshore L.P. have been updated as to the merger and name conversion. We have not abstracted the lease files to determine if the entities affected by the acceptance of these documents holds an interest in the lease, nor have we attempt to identify leases where the entity is the operator on the ground that maintains vested record title or operating rights interests. If additional documentation, for change of operator, is required you will be contacted directly by the appropriate Field Office. The Mineral Management Services (MMS) and other applicable BLM offices were notified of the merger with a copy of this notice

Please contact this office if you identify additional leases where the merging party maintains an interest, under our jurisdiction, and we will document the case files with a copy of this notice. If the leases are under the jurisdiction of another State Office that information will be forwarded to them for their action.

Three riders accompanied the merger/name conversion documents which will add Kerr-McGee Oil and Gas Onshore LLC as a principal to the 3 Kerr-McGee bonds maintained by the Wyoming State Office. These riders will be forward to them for their acceptance.

The Nationwide Oil & Gas Continental Casualty Company Bond #158626364 (BLM Bond #CO1203), maintained by the Colorado State Office, will remain in full force and effect until an assumption rider is accepted by the Wyoming State Office that conditions their Nationwide Safeco bond to accept all outstanding liability on the oil and gas leases attached to the Colorado bond.

If you have questions about this action you may call me at 303.239.3768.

/s/Martha L. Maxwell
Martha L. Maxwell
Land Law Examiner
Fluid Minerals Adjudication

Attachment:

List of OG Leases to each of the following offices:

MMS MRM, MS 357B-1

WY, UT, NM/OK/TX, MT/ND, WY State Offices

CO Field Offices

Wyoming State Office

Rider #1 to Bond WY2357

Rider #2 to Bond WY1865

Rider #3 to Bond WY1127



United States Department of the Interior



BUREAU OF LAND MANAGEMENT
Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155
<http://www.blm.gov>

IN REPLY REFER TO:
3106
(UT-922)

March 27, 2006

Memorandum

To: Vernal Field Office

From: Chief, Branch of Fluid Minerals

Subject: Merger Approval

Attached is an approved copy of the merger recognized by the Bureau of Land Management, Colorado State Office. We have updated our records to reflect the merger from Westport Oil and Gas Company L.P. into Kerr-McGee Onshore Oil and Gas Company. The merger was approved effective January 4, 2006.

Chief, Branch of
Fluid Minerals

Enclosure

Approval letter from BLM COSO (2 pp)

cc: MMS, Reference Data Branch, James Sykes, PO Box 25165, Denver CO 80225
State of Utah, DOGM, Attn: Earlene Russell, PO Box 145801, SLC UT 84114
Teresa Thompson
Joe Incardine
Connie Seare
Dave Mascarenas
Susan Bauman

RECEIVED

MAR 28 2006

BLM OF CU, GAS & MINERALS

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-28652
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: GLEN BENCH FED 22-2	
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.	9. API NUMBER: 43047340920000	
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	PHONE NUMBER: 720 929-6515 Ext	9. FIELD and POOL or WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1980 FSL 0660 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWSW Section: 22 Township: 08.0S Range: 22.0E Meridian: S	COUNTY: UINTAH	
	STATE: UTAH	
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start: <input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 9/21/2011 <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input checked="" type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> WILDCAT WELL DETERMINATION <input type="checkbox"/> OTHER	
<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>		
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.		
THE SUBJECT WELL WAS RETURNED BACK TO PRODUCTION ON 09/21/2011.		
<p>Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY</p>		
NAME (PLEASE PRINT) Sheila Wopsock	PHONE NUMBER 435 781-7024	TITLE Regulatory Analyst
SIGNATURE N/A	DATE 10/7/2011	

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-28652
1. TYPE OF WELL Gas Well	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.	7. UNIT or CA AGREEMENT NAME:
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	8. WELL NAME and NUMBER: GLEN BENCH FED 22-2
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1980 FSL 0660 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWSW Section: 22 Township: 08.0S Range: 22.0E Meridian: S	9. API NUMBER: 43047340920000
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	9. FIELD and POOL or WILDCAT: NATURAL BUTTES
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	PHONE NUMBER: 720 929-6456
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1980 FSL 0660 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWSW Section: 22 Township: 08.0S Range: 22.0E Meridian: S	COUNTY: UINTAH
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1980 FSL 0660 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWSW Section: 22 Township: 08.0S Range: 22.0E Meridian: S	STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 12/9/2016	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input checked="" type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The GLEN BENCH FED 22-2 well was returned to production on 12/09/2016.

**Accepted by the
 Utah Division of
 Oil, Gas and Mining
 FOR RECORD ONLY
 December 30, 2016**

NAME (PLEASE PRINT) Candice Barber	PHONE NUMBER 435 781-9749	TITLE HSE Representative
SIGNATURE N/A	DATE 12/20/2016	