

JAN. 17. 2003 3:34PM

WESTPORT

NO. 173 P. 2

**WESTPORT OIL AND GAS COMPANY, L.P.**

410 Seventeenth Street #2300 Denver Colorado 80202-4436
Telephone: 303 573 5404 Fax: 303 573 5609

February 1, 2002

Department of the Interior
Bureau of Land Management
2850 Youngfield Street
Lakewood, CO 80215-7093
Attention: Ms. Martha Maxwell

RE: BLM Bond CO-1203
BLM Nationwide Bond 158626364
Surety - Continental Casualty Company
Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.
Conversion of Westport Oil and Gas Company, Inc., into Westport Oil and Gas Company, L.P.
Assumption Rider - Westport Oil and Gas Company, L.P.

Dear Ms. Maxwell:

Pursuant to our recent conversations, please find the following list of enclosures for the BLM's consideration and approval:

Two (2) Assumption Riders, fully executed originals.
Copies of Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.
Copies of Westport Oil and Gas Company, Inc., conversion into Westport Oil and Gas Company, L.P.
List of all Federal/BIA/State Leases - Belco/Westport's leases - in all states.

Please inform us of any additional information needed to complete the change to Westport Oil and Gas Company, L.P., as operator of record.

I thank you for your assistance and cooperation in this matter. Please do not hesitate contacting the undersigned, should a question arise.

Sincerely,
Westport Oil and Gas Company, L.P.

Debby J. Black
Debby J. Black
Engineer Technician

Encl:



United States Department of the Interior **RECEIVED**

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

FEB 22 2002

DIVISION OF
OIL, GAS AND MINING

In Reply Refer To:
3106
UTU-25566 et al
(UT-924)

FEB 21 2002

NOTICE

Westport Oil and Gas Company L.P. : Oil and Gas
410 Seventeenth Street, #2300 :
Denver Colorado 80215-7093 :

Name Change Recognized

Acceptable evidence has been received in this office concerning the name change of Westport Oil and Gas Company, Inc. into Westport Oil and Gas Company, L.P. with Westport Oil and Gas Company, L.P. being the surviving entity.


For our purposes, the name change is recognized effective December 31, 2001.

The oil and gas lease files identified have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Westport Oil and Gas Company, Inc. to Westport Oil and Gas Company, L.P.. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Colorado.

UTU-03405
UTU-20895
UTU-25566
UTU-43156
UTU-49518
UTU-49519
UTU-49522
UTU-49523



Robert Lopez
Chief, Branch of
Minerals Adjudication

cc: Moab Field Office
Vernal Field Office
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217
State of Utah, DOGM, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114
Teresa Thompson (UT-922)
Joe Incardine (UT-921)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER


FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. 14-20-H62-2888
b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name Ute Tribe
2. Name of Operator El Paso Production Oil & Gas Company		7. If Unit or CA Agreement, Name and No. 9C-000187
3A. Address P.O. Box 1148 Vernal, Utah 84078	3b. Phone No. (include area code) (435)-781-7024	8. Lease Name and Well No. Tribal #2-207
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NENE 1145'FNL & 875'FEL 4436307 40.06937 At proposed prod. Zone 626890 -109.51203		9. API Well No. 43-047-3456A
14. Distance in miles and direction from nearest town or post office* 16.4 Miles Southeast of Ouray, Utah		10. Field and Pool, or Exploratory Natural Buttes
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 875'	16. No. of Acres in lease 324.16	11. Sec., T., R., M., or Blk. and Survey or Area Section 2-T9S-R21E
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Refer to Topo C	19. Proposed Depth 6800'	12. County or Parish Uintah
20. BLM/BIA Bond No. on file BIA: #103601476	13. State Utah	17. Spacing Unit dedicated to this well 320
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 4687.9'Ungraded GL	22. Approximate date work will start* Upon Approval	23. Estimated duration To Be Determined

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized office. |

25. Signature <i>Sheila Upchego</i>	Name (Printed/Typed) Sheila Upchego	Date 4/29/2002
Title Regulatory Analyst		
Approved by (Signature) <i>Bradley G. Hill</i>	Name (Printed/Typed) BRADLEY G. HILL	Date 05-14-02
Title RECLAMATION SPECIALIST III		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

RECEIVED

MAY 01 2002

DIVISION OF
OIL, GAS AND MINING

TRIBAL #2-207
NE/NE Sec. 2, T9S, R21E
LEASE NUMBER: 14-20-H62-2888

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. Estimated Tops of Important Geologic Markers:

<u>Formation</u>	<u>Depth</u>
KB	4703'
Green River	2083'
Wasatch	5303'
Total Depth	6800'

2. Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
	Green River	2083'
Gas	Wasatch	5303'
Water	N/A	
Other Minerals	N/A	

3. Pressure Control Equipment: (Schematic Attached)

The BOP stack will consist of one 11" 3,000 psi annular BOP 11" 3,000 psi double ram, and one 11' drilling spool. The lower ram will contain pipe rams, and the upper ram will contain blind rams.

The choke and kill lines and the choke manifold will have a 3,000 psi minimum pressure.

The BOPE and related equipment will meet the requirements of the 3M system.

4. Proposed Casing & Cementing Program:

Refer to the attached casing & cementing program.

5. Drilling Fluids Program:

Refer to the attached mud program.

6. Evaluation Program

Refer to the attached Geological Data.

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure calculated @ 6800' TD, approximately equals 2,720 psi (calculated at 0.4 psi/foot).

Maximum anticipated surface pressure equals approximately 1,224 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

**TRIBAL #2-207
NE/NE Sec. 2, T9S, R21E
UINTAH COUNTY, UTAH
LEASE NUMBER: 14-20-H62-2888**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

An onsite inspection was originally conducted for the proposed location on 4/7/02. It was determined that the proposed access road and pipeline ROW fell within the "Flood Plain Area" and operations are to be conducted as stated in the *Final Ouray Environmental Assessment*.

1. Existing Roads:

Refer to Topo Map A for directions to the location.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. Planned Access Roads:

Refer to Topo Map B for the location of the proposed access road.

The upgraded and new portions of the access road will be crowned and ditched with a running surface of 18 feet and a maximum disturbed width of 30 feet. Appropriate water control will be installed to control erosion; culverts are to be installed as needed to improve natural water drainage.

The access road was centerline flagged during time of staking.

The Access Road shall be bladed flat as need for composite pad. As discussed at the on-site inspection.

Surface disturbance and vehicular traffic will be limited to the approved location and approved access route. Any additional area needed will be approved in advance.

3. Location of Existing Wells Within a 1-Mile Radius:

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities:

The following guidelines will apply if the well is productive.

Production facilities will consist of a conventional wellhead and allocation gas metering. The wellhead controls will be elevated to allow for a continuous production during seasonal high water conditions, as stated in the *Final Ouray Environmental Assessment 2.1.3, Production Operations*.

All permanent (on-site six months or longer) above the ground structures constructed or installed will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The required color is Desert Brown, Munsell standard color number 10 YR 6/3.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Refer to Topo Map D for the placement of the pipeline lateral. As discussed at the on-site inspection

5. **Location and Type of Water Supply:**

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec. 32, T4S, R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

6. **Source of Construction Materials:**

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

Construction will not occur during the period of April 1 – July 15, unless it is determined by the USF&WLS and the Bureau of Reclamation that the flooding forecast evaluation has changed for the current year; as stated in the Final Formal Sec. 7 Consultation, page 37 , Item #8.

7. **Methods of Handling Waste Materials:**

Drill cuttings will be removed from the *Closed-Loop Circulating System* and transported by truck to an approved disposal site outside of the floodplain area. Please refer to "Location Layout" and the "Typical Solids Control System" attachments.

Any production water from the subject well will be contained in a common water tank(s) at the CTB #E2S in Sec.2 , T9S, R21E, and then be hauled to one of the pre-approved disposal sites: RNI Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC & MC Sec. 12, T6S, R19E.

Drilling fluids, including salts and chemicals, will be contained in the *Closed-Loop System*. Upon termination of drilling and completion operations, the liquid contents will be removed and disposed of at an approved waste disposal facility after drilling is terminated.

The *Closed-Loop System* will be utilized and set-up in the area normally utilized for a reserve pit. Refer to the Location Layout.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

11. **Surface Ownership:**

Ute Indian Tribe
P.O. Box 190
Ft. Duchesne, UT 84026
(435) 722-5141

12. **Other Information:**

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance.

The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

A Class III archaeological survey has been conducted. A copy of the survey report was submitted to the Ute Tribe Energy & Minerals Department prior to the onsite.

13. **Lessee's or Operator's Representative & Certification:**

Sheila Upchego
Regulatory Analyst
El Paso Production Oil & Gas Company
P.O. Box 1148
Vernal, UT 84078
(435) 781-7024

Scott Palmer
Drilling Manager
El Paso Production Oil & Gas Company
9 Greenway Plaza
Houston, TX 77046
(832) 676-4850

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

El Paso Production Oil & Gas Company is considered to be the operator of the subject well. El Paso Production Oil & Gas Company agrees to be responsible under the terms and conditions of the lease for the operations conducted upon leased lands. Bond coverage pursuant to 43 CFR 3104 for the lease activities is being provided by Bureau of Indian Affairs Bond #103601476.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.


Sheila Upchego

4/29/02

Date

EL PASO PRODUCTION OIL & GAS COMPANY

TRIBAL #2-207

LOCATED IN UINTAH COUNTY, UTAH

SECTION 2, T9S, R21E, S.LB.&M.

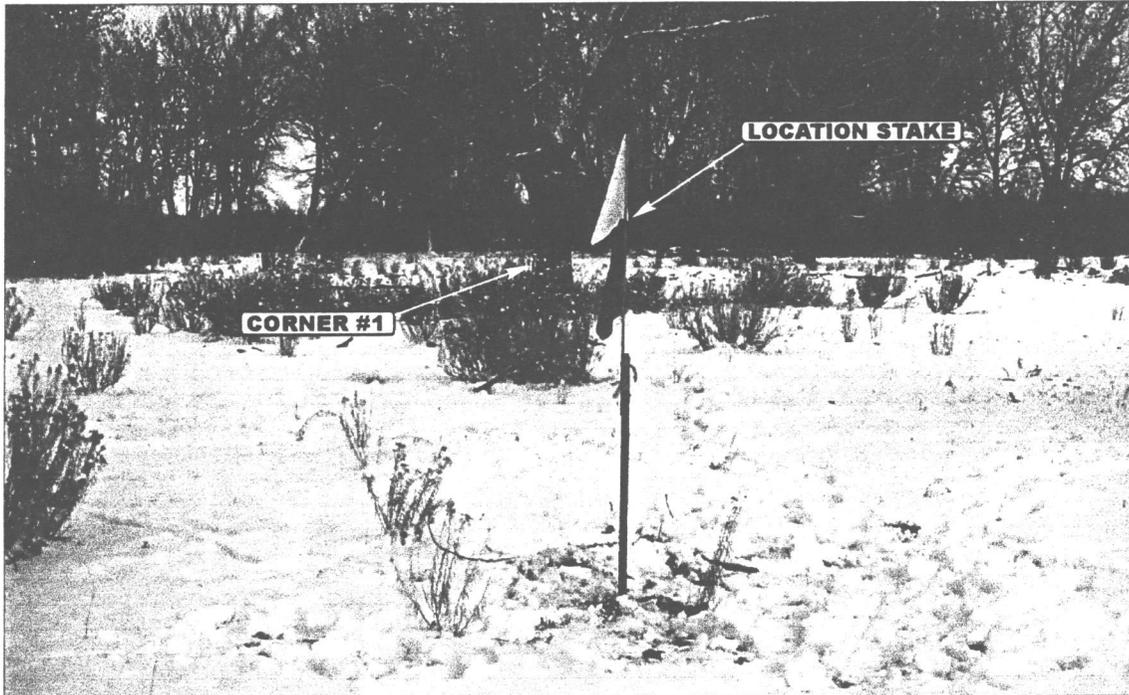


PHOTO: VIEW FROM LOCATION STAKE TO CORNER #1

CAMERA ANGLE: NORTHEASTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHERLY



- Since 1964 -

Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

1

8

02

MONTH

DAY

YEAR

PHOTO

TAKEN BY: J.F.

DRAWN BY: P.M.

REVISED: 00-00-00


EL PASO PRODUCTION OIL & GAS COMPANY

TRIBAL #2-207

SECTION 2, T9S, R21E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 3.2 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 1.0 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY, THEN NORTHEASTERLY DIRECTION APPROXIMATELY 2.0 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY, THEN NORTHEASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 6.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN NORTHERLY DIRECTION APPROXIMATELY 1.6 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHWEST; TURN LEFT AND PROCEED IN A NORTHWESTERLY DIRECTION APPROXIMATELY 0.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN RIGHT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHEAST; FOLLOW ROAD FLAGS IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.1 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 47.4 MILES.

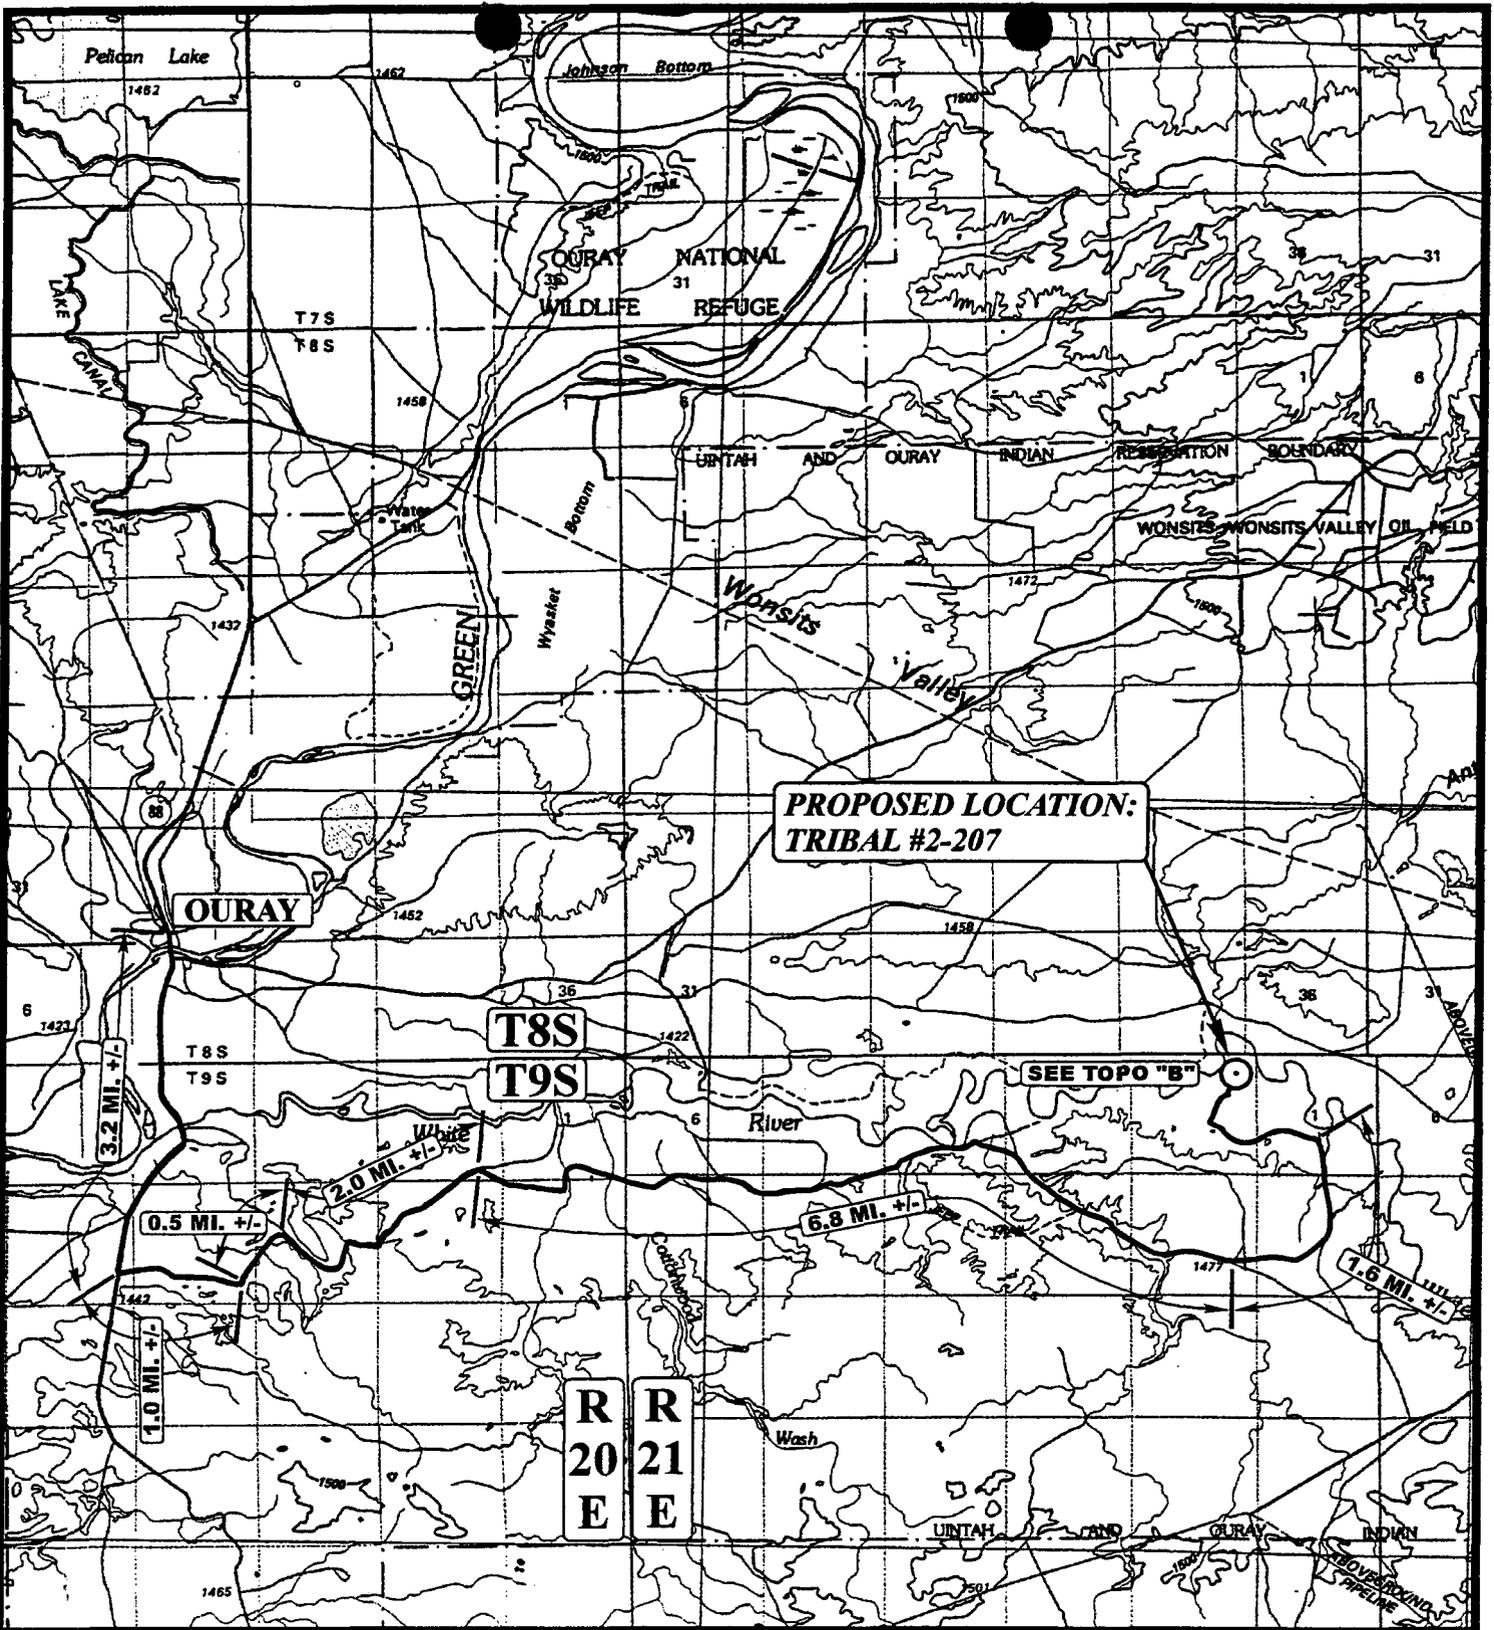

**PROPOSED LOCATION:
TRIBAL #2-207**

SEE TOPO "B"

**R
20
E** **R
21
E**

LEGEND:

⊙ PROPOSED LOCATION

EL PASO PRODUCTION OIL & GAS COMPANY

TRIBAL #2-207

SECTION 2, T9S, R21E, S.L.B.&M.


1145' FNL 875' FEL

UEIS **Uintah Engineering & Land Surveying**
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC 1 8 02
MAP MONTH DAY YEAR
 SCALE: 1:100,000 DRAWN BY: P.M. REVISED: 00-00-00



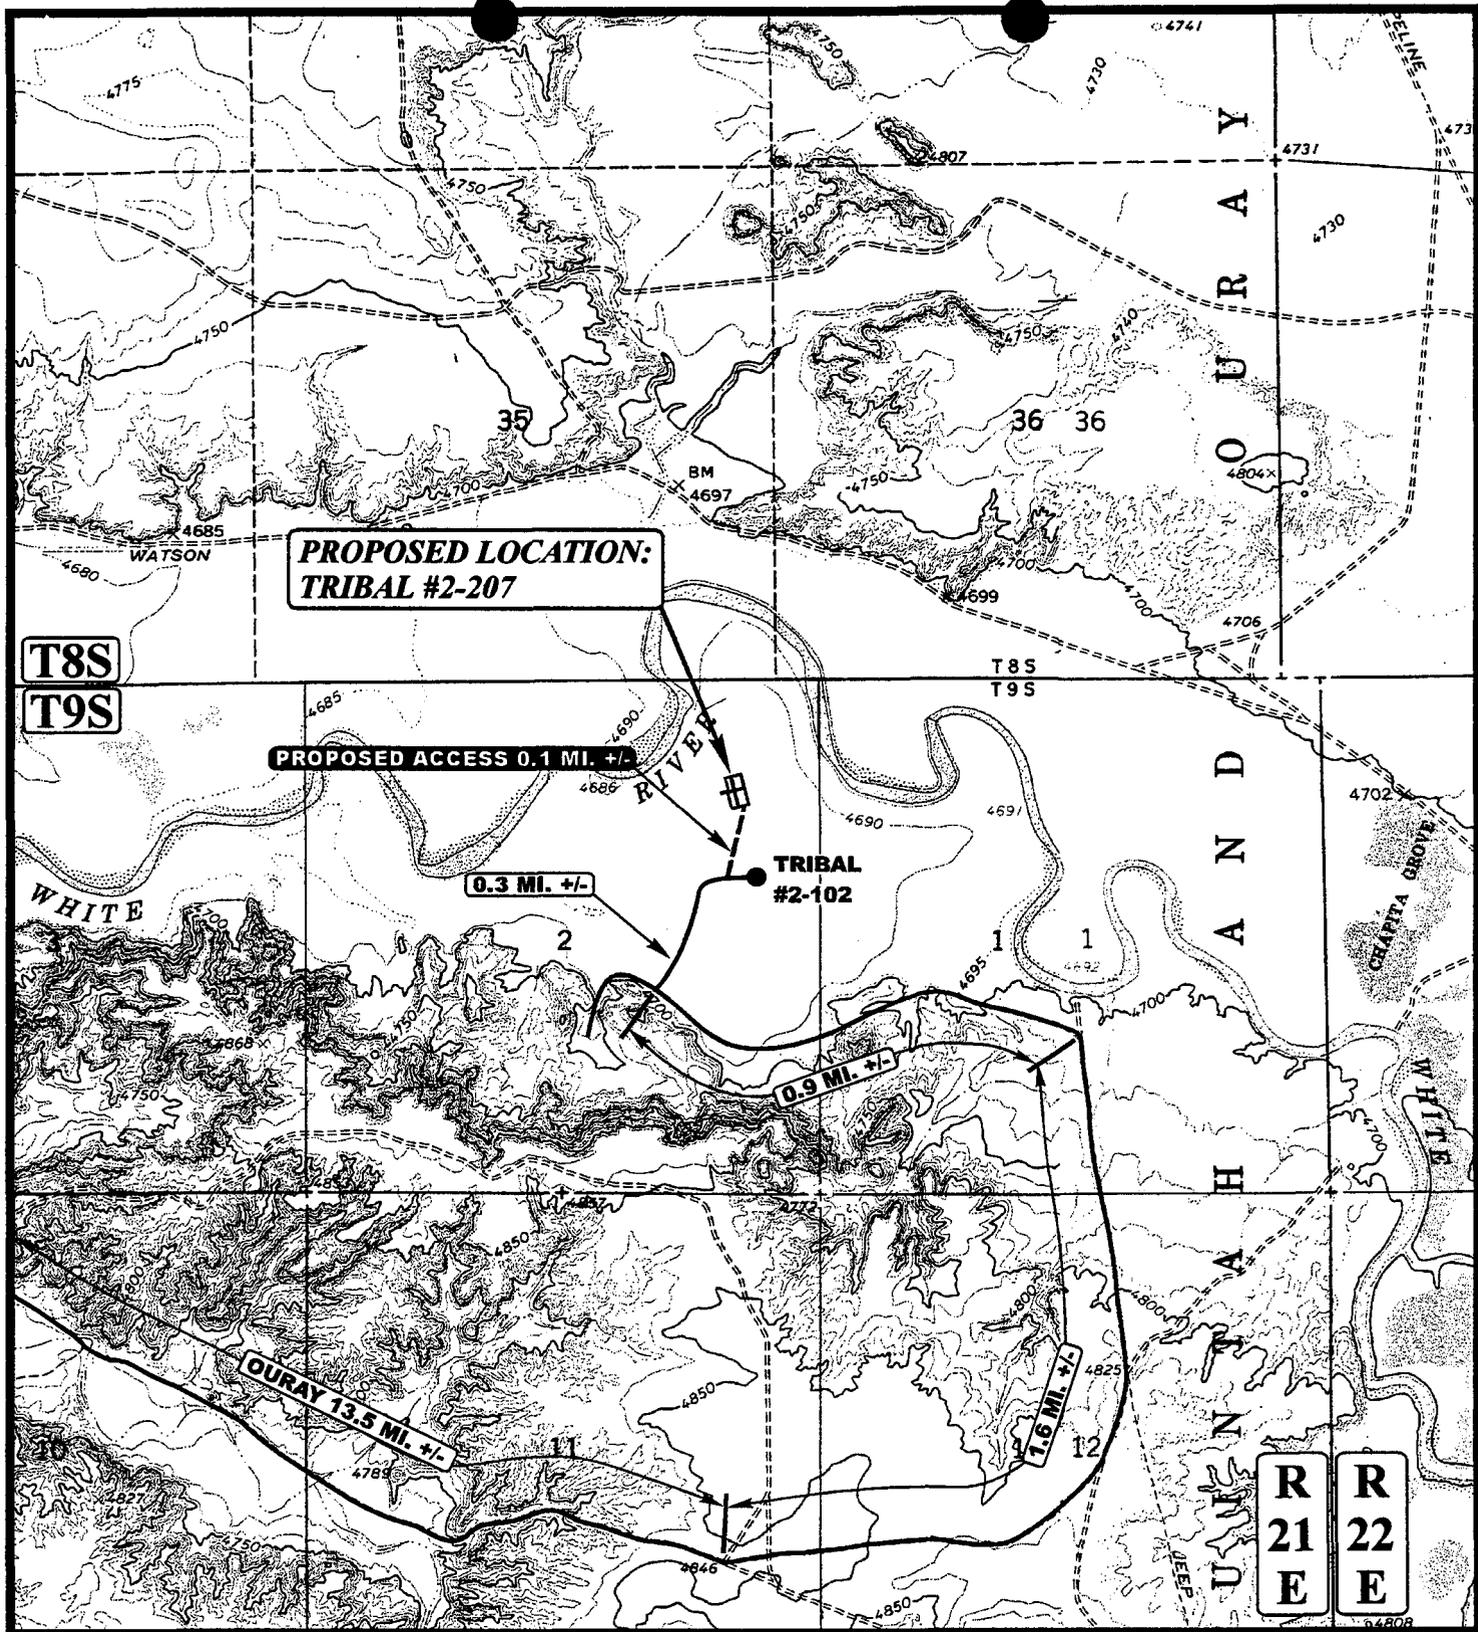

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING ROAD




EL PASO PRODUCTION OIL & GAS COMPANY

TRIBAL #2-207
SECTION 2, T9S, R21E, S.L.B.&M.
1145' FNL 875' FEL

	Uintah Engineering & Land Surveying 85 South 200 East Vernal, Utah 84078 (435) 789-1017 * FAX (435) 789-1813
--	---

TOPOGRAPHIC MAP	1 MONTH	8 DAY	02 YEAR	
SCALE: 1" = 2000'	DRAWN BY: P.M.	REVISED: 00-00-00		

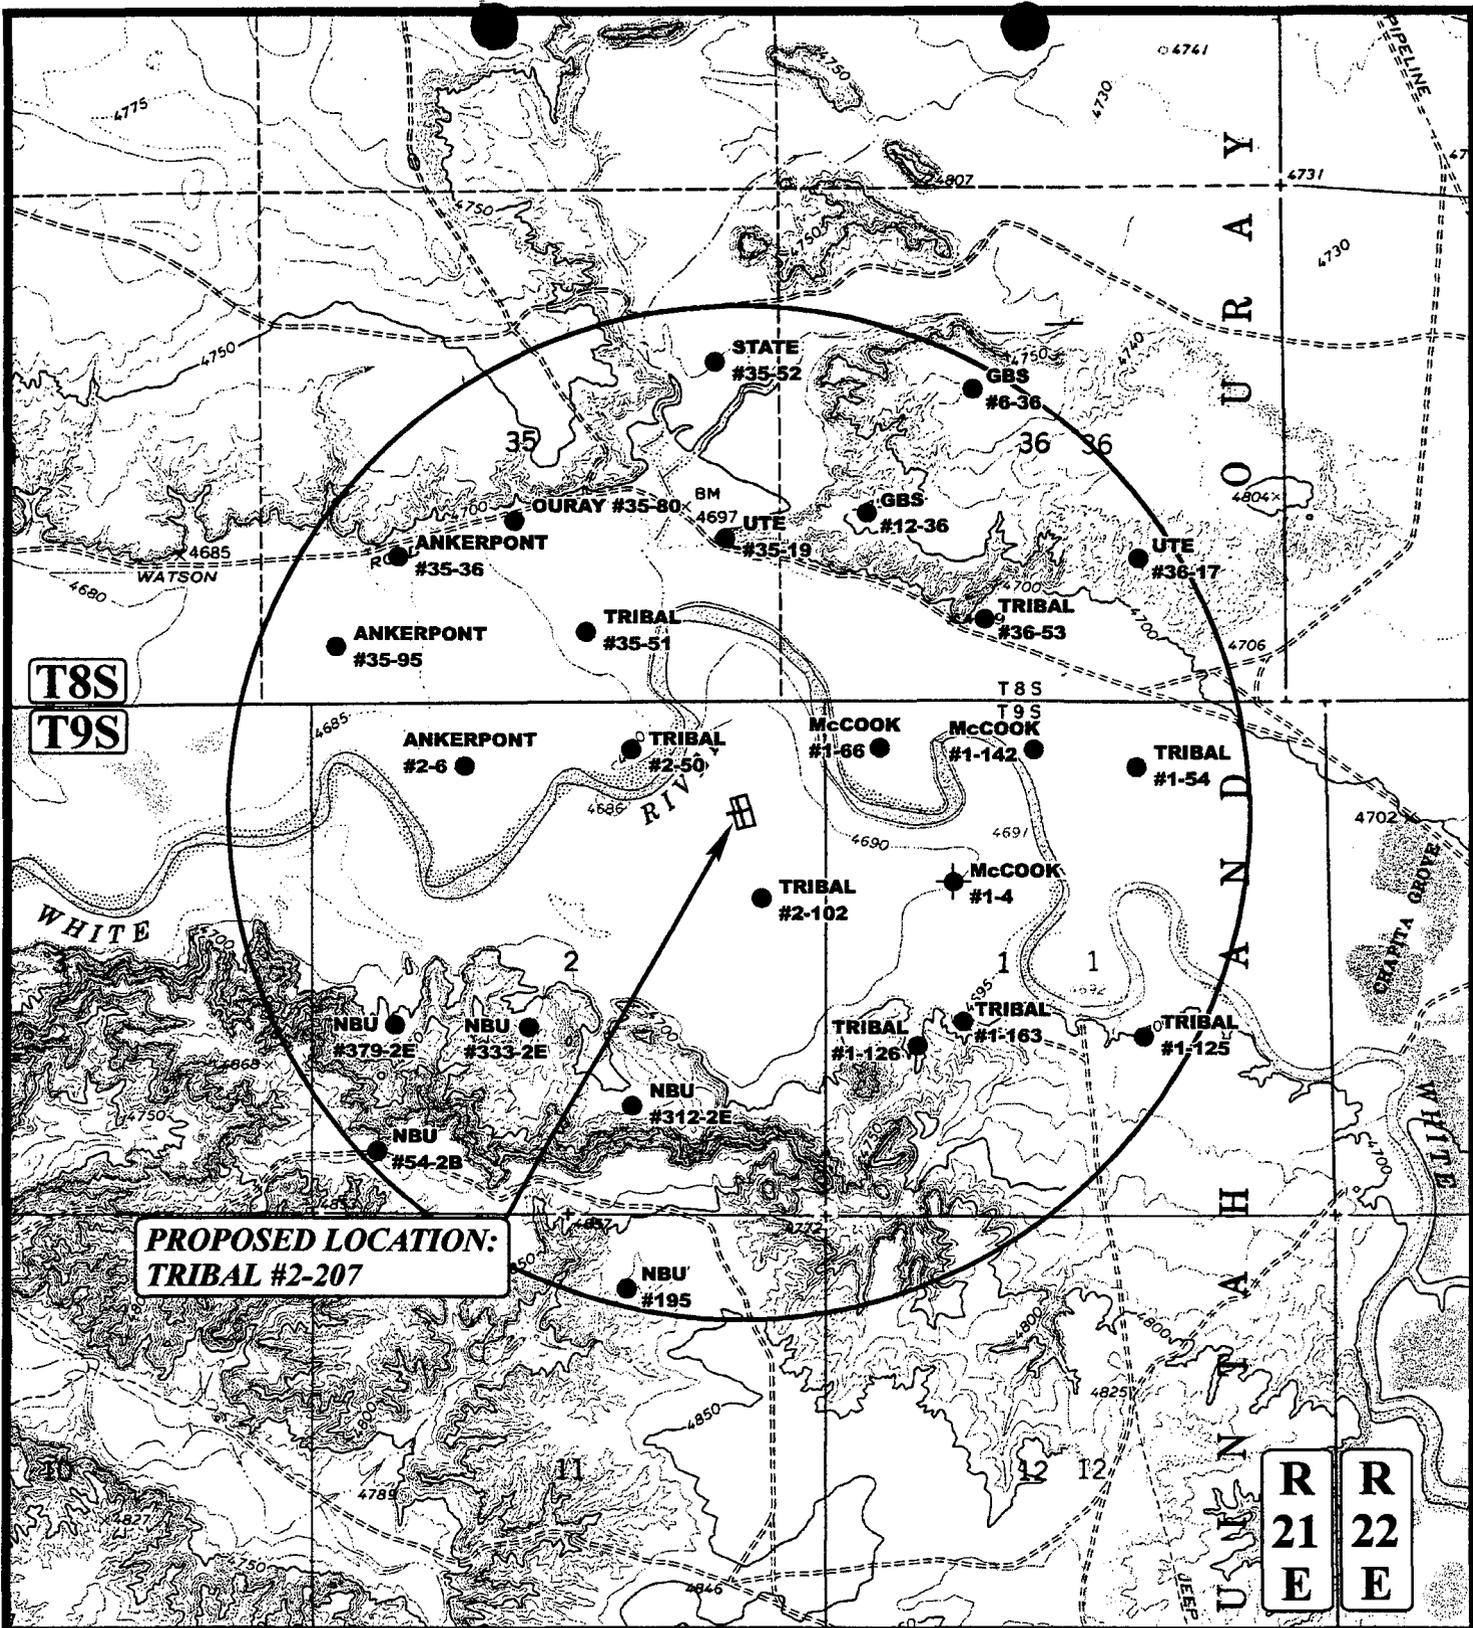

**PROPOSED LOCATION:
TRIBAL #2-207**

LEGEND:

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- ⦿ SHUT IN WELLS
- ⊕ WATER WELLS
- ⦿ ABANDONED WELLS
- ⦿ TEMPORARILY ABANDONED

EL PASO PRODUCTION OIL & GAS COMPANY


**TRIBAL #2-207
SECTION 2, T9S, R21E, S.L.B.&M.
1145' FNL 875' FEL**

U&L S Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP 1 8 02
MONTH DAY YEAR
SCALE: 1" = 2000' DRAWN BY: P.M. REVISED: 00-00-00



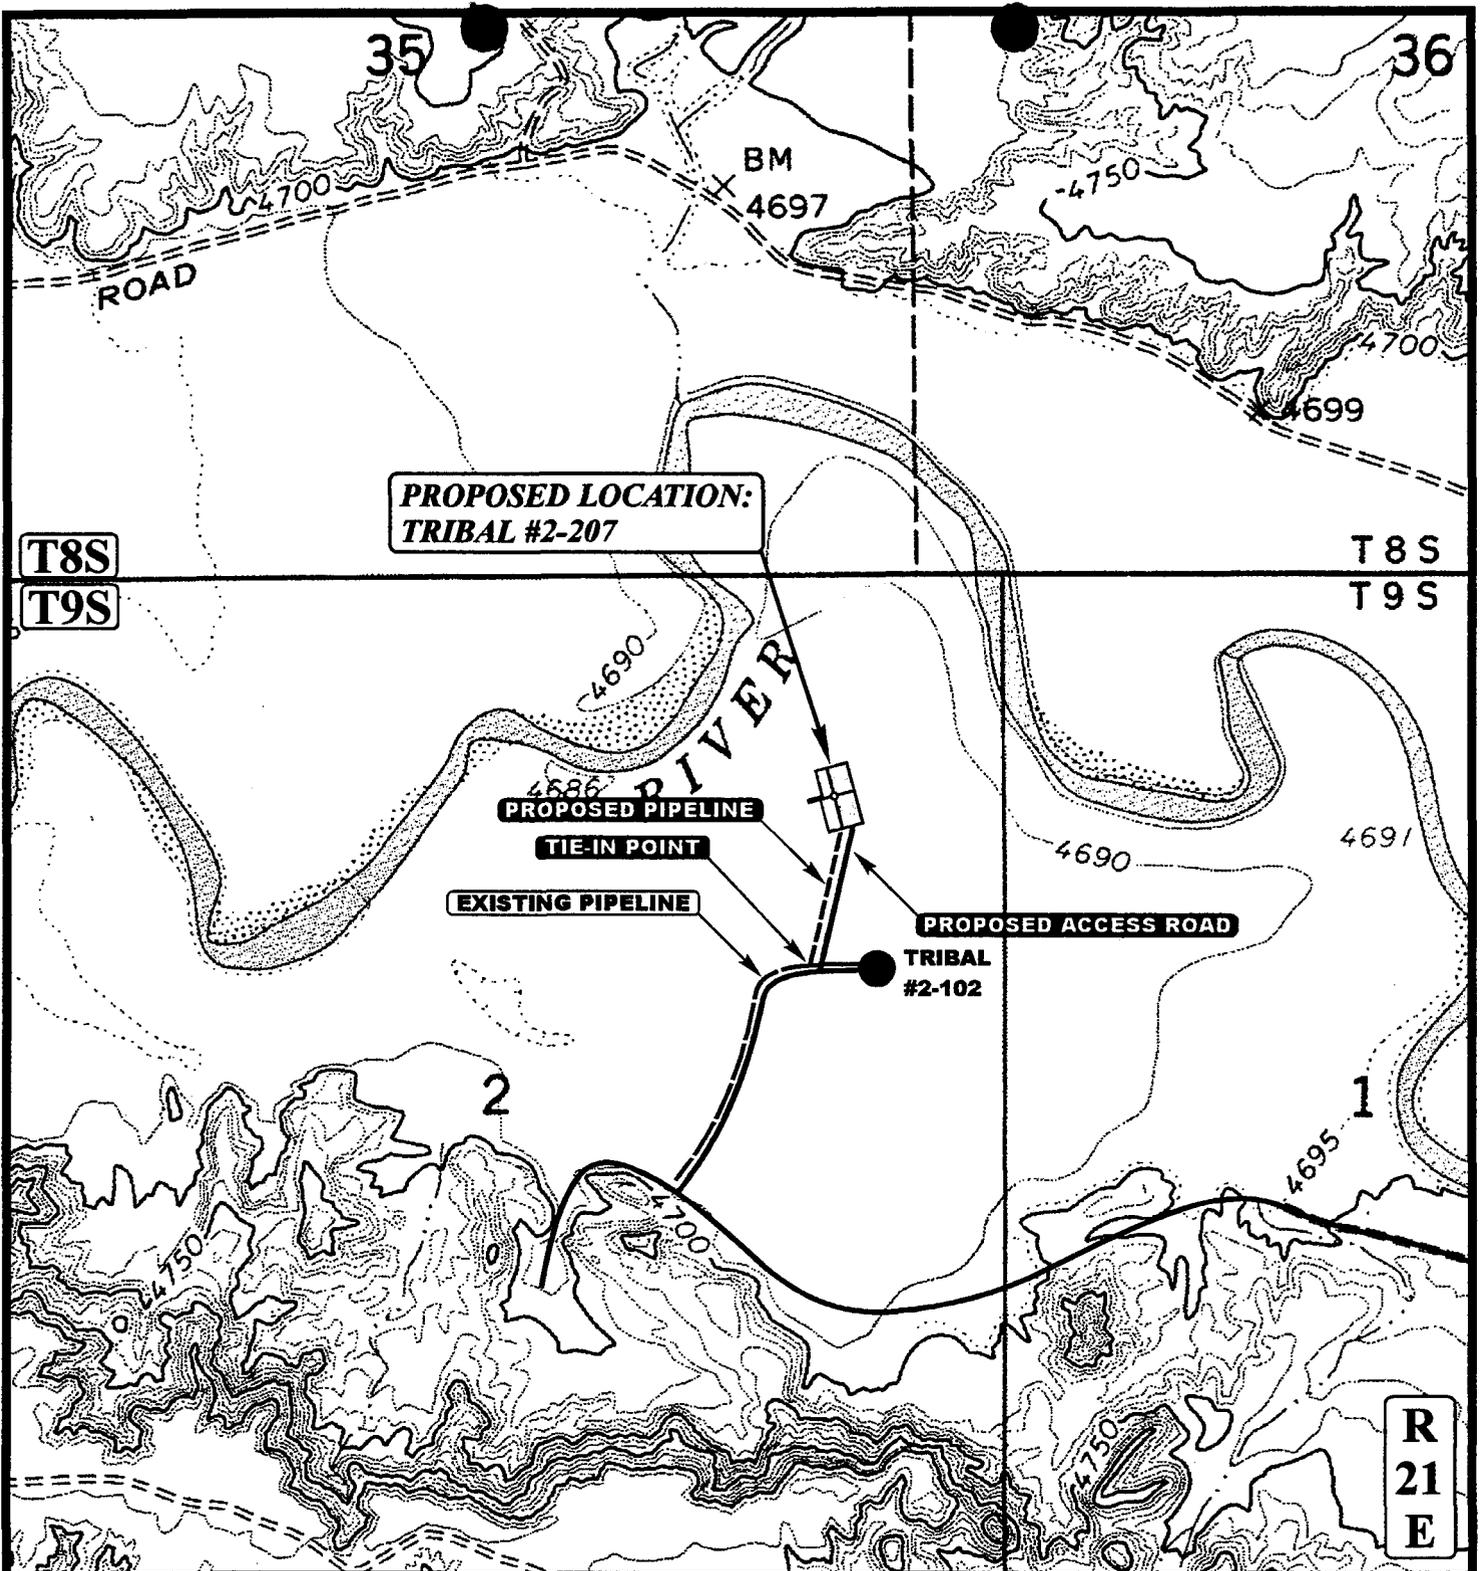

APPROXIMATE TOTAL PIPELINE DISTANCE = 749' +/-

LEGEND:

- EXISTING PIPELINE
- - - - - PROPOSED PIPELINE
- PROPOSED ACCESS

EL PASO PRODUCTION OIL & GAS COMPANY

TRIBAL #2-207

SECTION 2, T9S, R21E, S.L.B.&M.

1145' FNL 875' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813


TOPOGRAPHIC 1 8 02
MAP MONTH DAY YEAR
 SCALE: 1" = 1000' DRAWN BY: P.M. REVISED: 00-00-00



EL PASO PRODUCTION OIL & GAS COMPANY

LOCATION LAYOUT FOR



TRIBAL #2-207
SECTION 2, T9S, R21E, S.L.B.&M.
1145' FNL 875' FEL



SCALE: 1" = 50'
DATE: 01-05-02
Drawn By: D.R.B.

NOTE:

Flare Tank is to be located a min. of 100' from the Well Head.

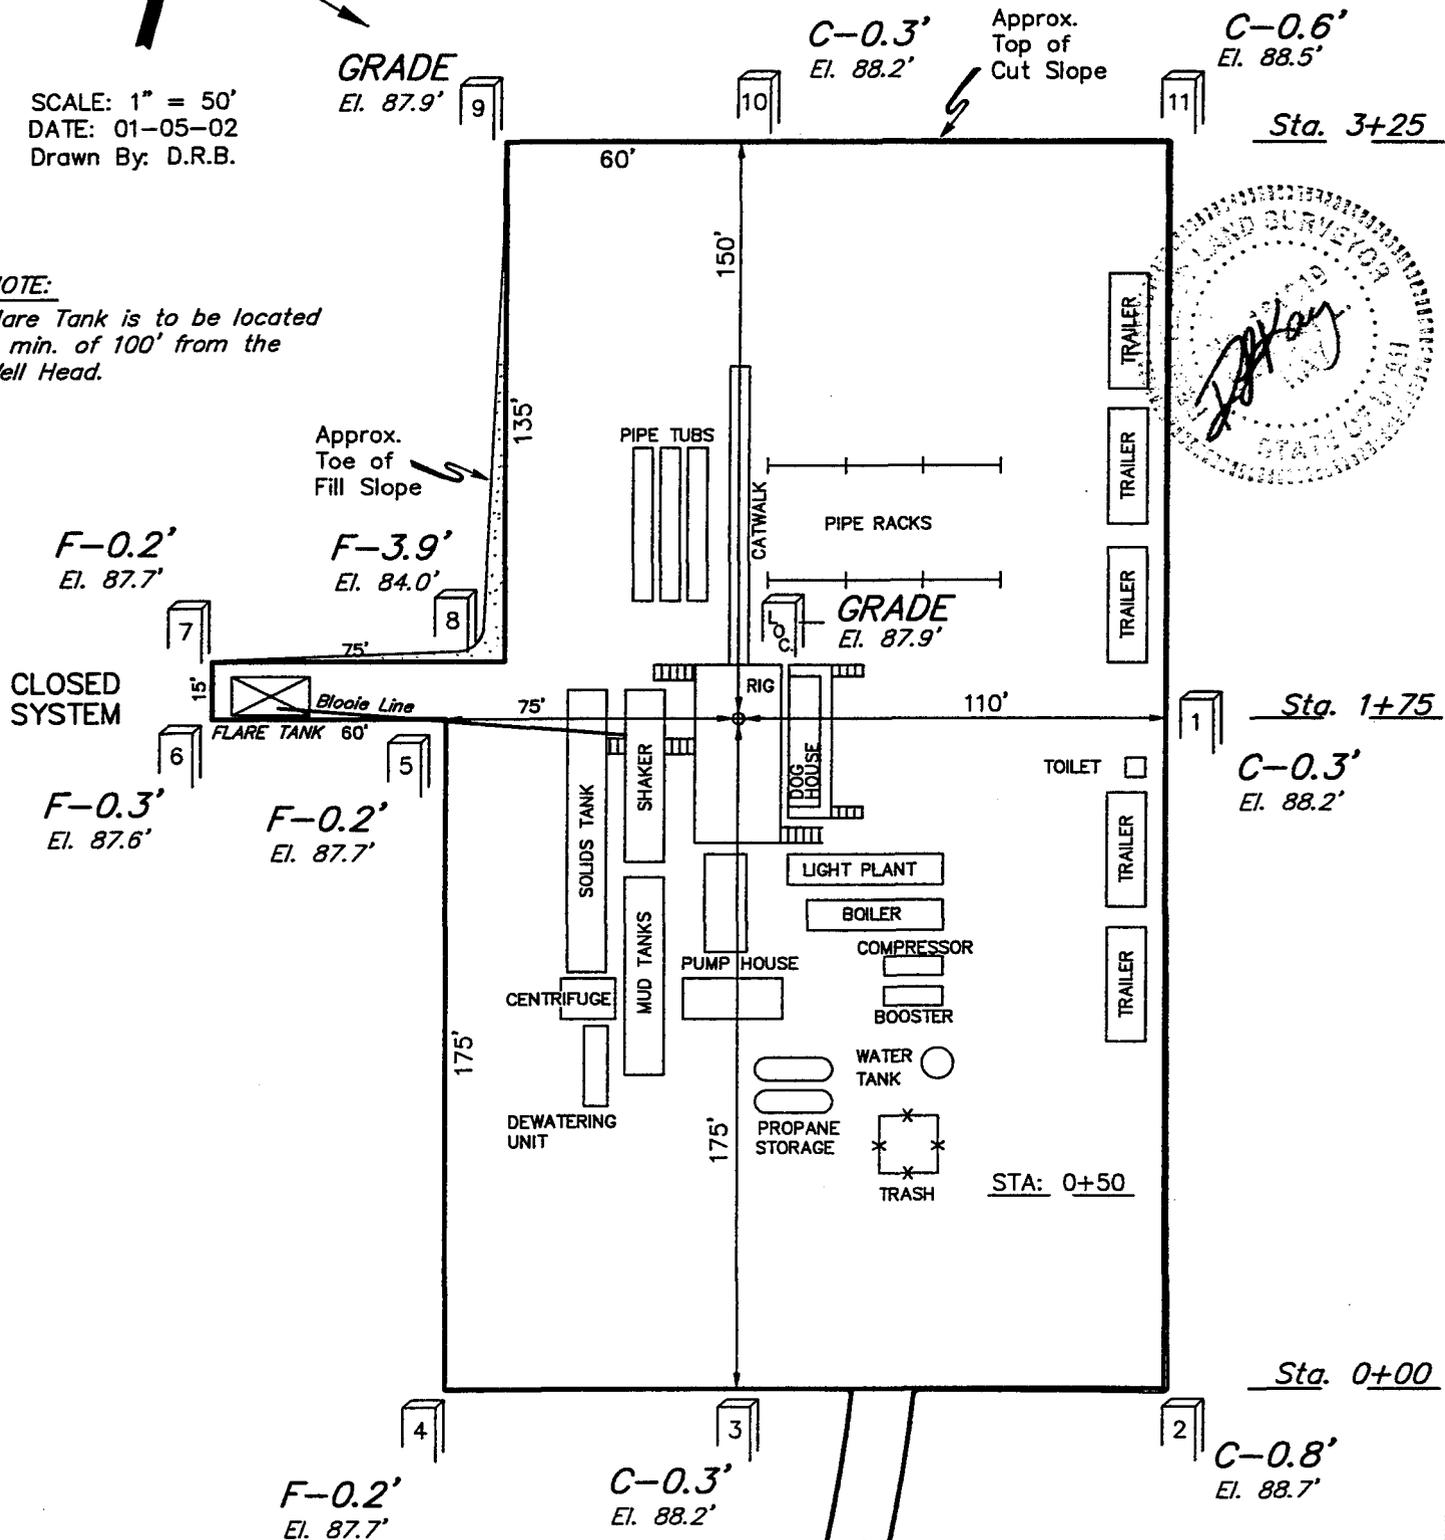

NOTES:

Elev. Ungraded Ground At Loc. Stake = 4687.9'
FINISHED GRADE ELEV. AT LOC. STAKE = 4687.9'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

Proposed Access Road



EL PASO PRODUCTION OIL & GAS COMPANY

TYPICAL CROSS SECTIONS FOR

TRIBAL #2-207

SECTION 2, T9S, R21E, S.L.B.&M.

1145' FNL 875' FEL



DATE: 01-05-02
Drawn By: D.R.B.

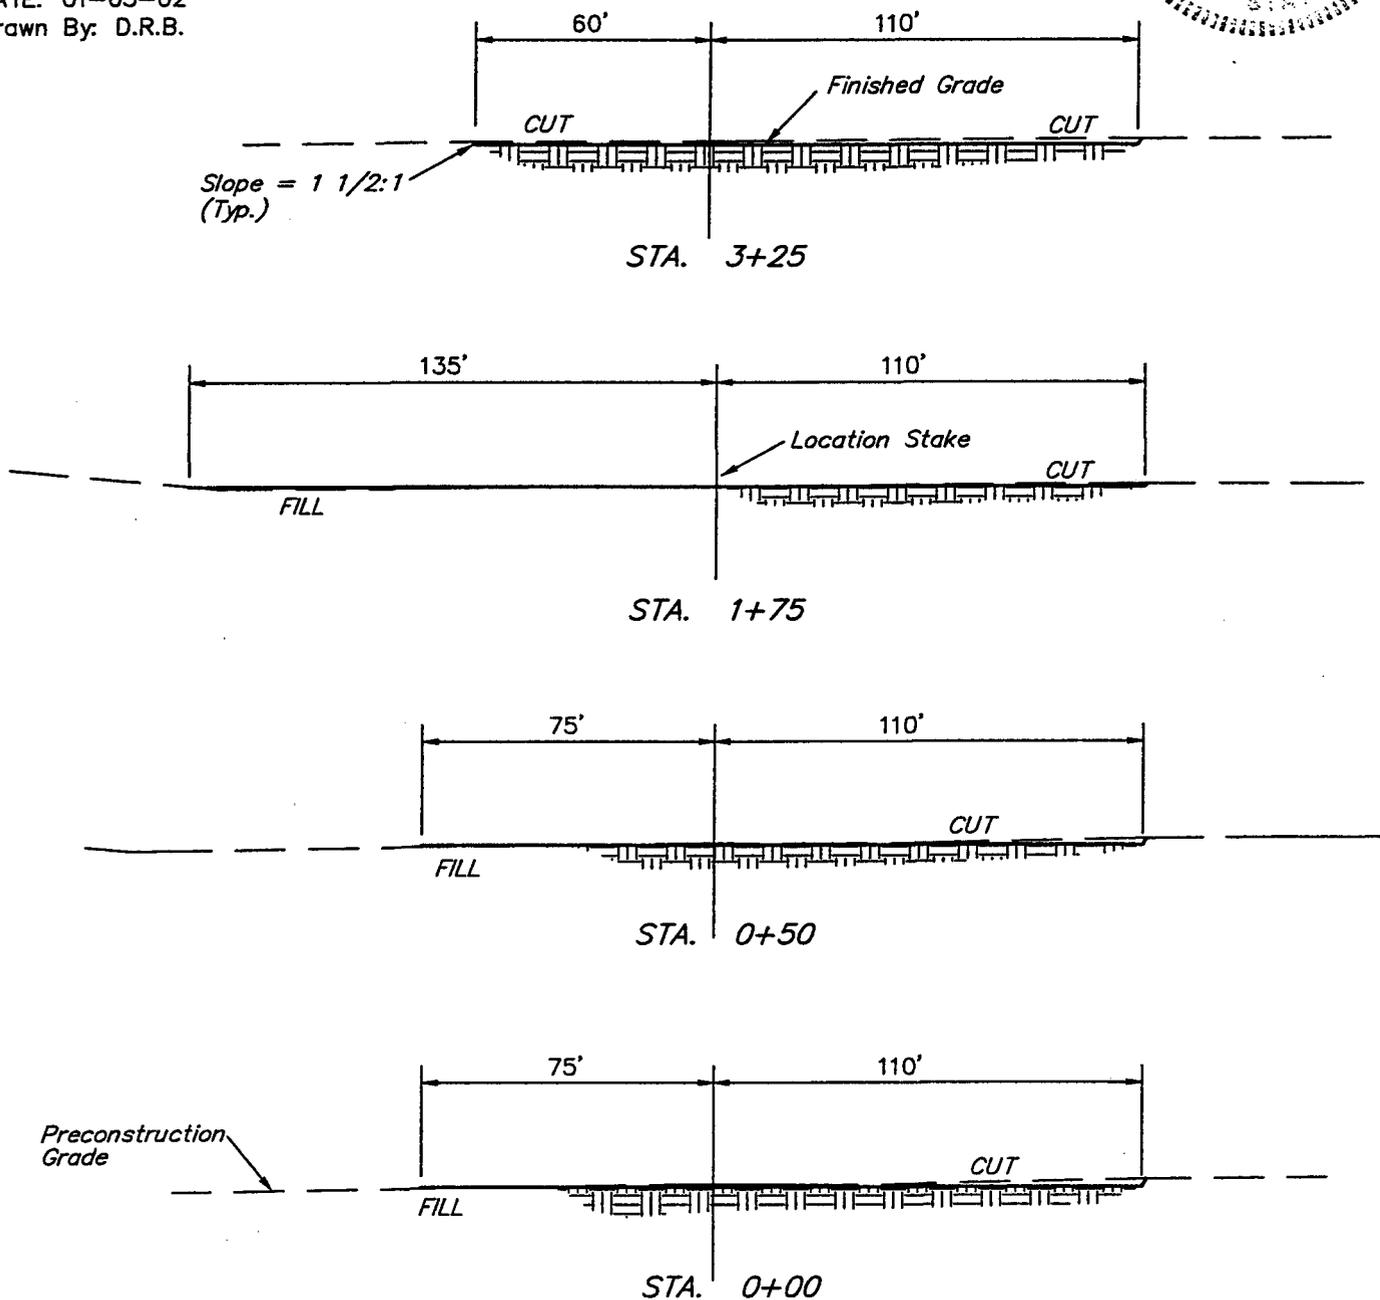



FIGURE #2

APPROXIMATE YARDAGES

TOTAL CUT = 440 CU.YDS.
TOTAL FILL = 440 CU.YDS.

DRILLING SCHEMATIC

COMPANY NAME El Paso Production Company DATE March 12, 2002
 WELL NAME Tribal 2-207 TD 6,800' MD/TVD _____
 FIELD Ouray 1145 COUNTY Uintah STATE Utah ELEVATION 4,688' KB 4,703'
 SURFACE LOCATION 660' FNL, 660' FEL, NE/NE, SEC 2, T9S, R21E BHL Straight Hole
 OBJECTIVE ZONE(S) Lower Green River, Wasatch
 ADDITIONAL INFO Regulatory Agencies: BLM, BIA, UDOGM, Tri-County Health Dept.

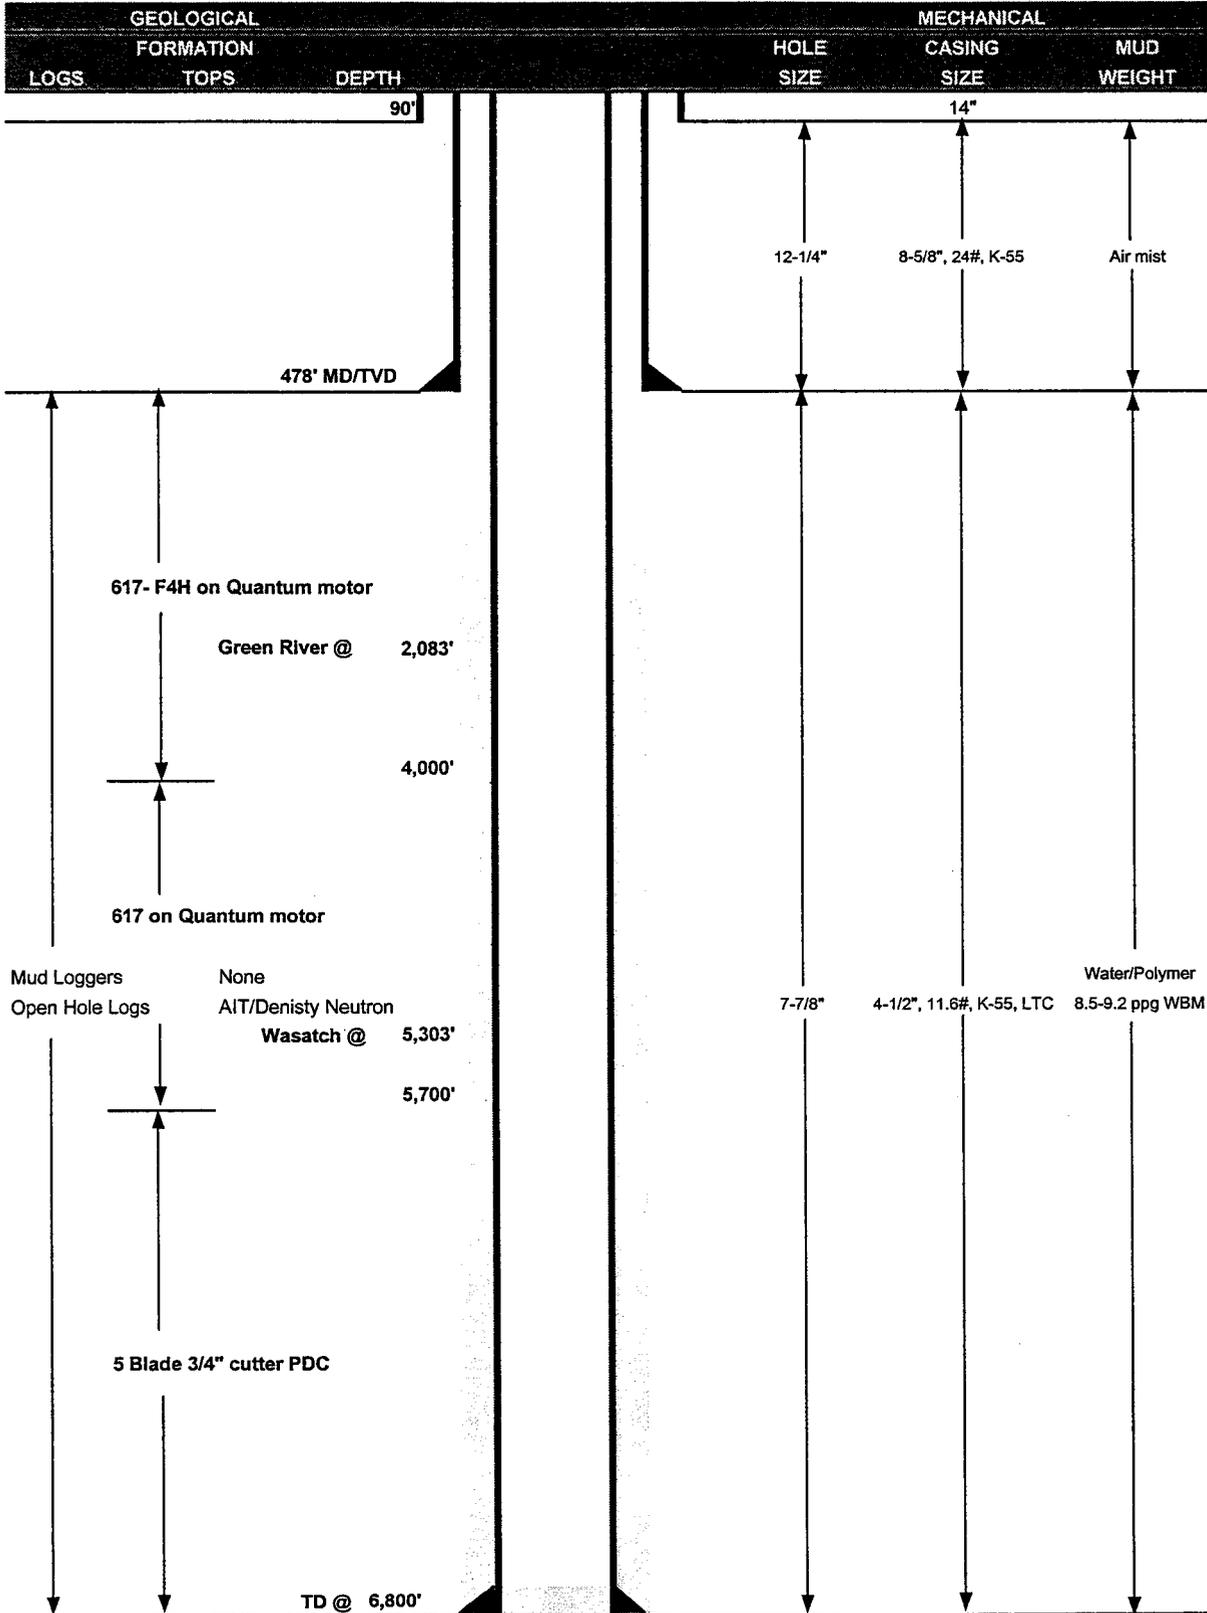

el paso Production
DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2950	1370	263000
SURFACE	8-5/8"	0-450'	24.00	K-55	STC	11.69	6.51	4.33
PRODUCTION*	4-1/2"	0-TD	11.60	K-55	LTC	5350	4960	180000
						2.23	1.40	1.40

- 1) Maximum Anticipated Surface Pressure (MASP) (Conductor and Surface Casings) = (Frac Gradient at Shoe - Gas Gradient (0.115 psi/ft))(TVD)
 - 2) MASP (Int Casing) = Pore Pressure at Next Casing Point - (Gas Gradient x TVD of Next Casing Point x 0.67) - (Mud Weight x TVD x 0.052 x 0.33)
 - 3) MASP (Prod Casing) = Pore Pressure - (Gas Gradient x TVD of Production Interval)
- (Burst Assumptions: FG @ 8-5/8" shoe = 13.0 ppg, Max Pore Pressure = 9.0 ppg EMW)
(Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing, 50000 lbs overpull)

CEMENT PROGRAM

	FF OF FILL	DESCRIPTION	SACKS	EXCESS*	WEIGHT	YIELD
SURFACE	450	Class G + 2% CaCl ₂ + 0.25 lb/sk Cello Flake	230	35%	15.60	1.18
PRODUCTION	LEAD 4,803'	Hilift + 12% gel + 3% salt + 1% D79 + 0.5% D112 + 0.2% D46	440	60%	11.00	3.91
	TAIL 1,997'	50/50 Poz/G + 10% salt + 2% gel + 0.2% D46	550	60%	14.10	1.33

* or 15% over caliper log in open hole

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out. BOPE: 11" 3M with one annular and 2 rams. Test to 3,000 psi (annular to 1,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves. Drop Totco surveys on bit trips only. Maximum allowable hole angle is 5 degrees.

DRILLING ENGINEER: _____
Buddy Novak



DATE: _____

DRILLING SUPERINTENDANT: _____

DATE: _____

3,000 PSI

BOP STACK

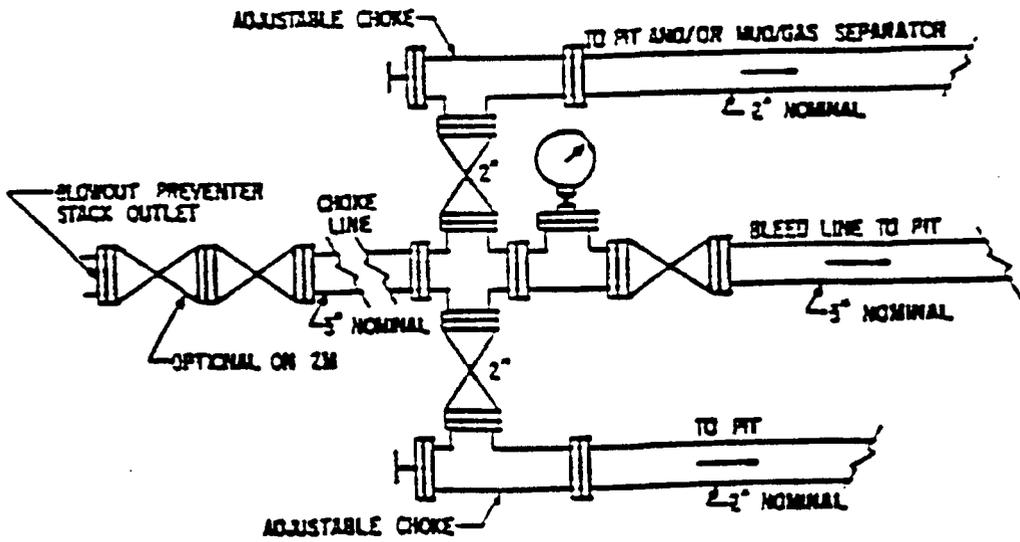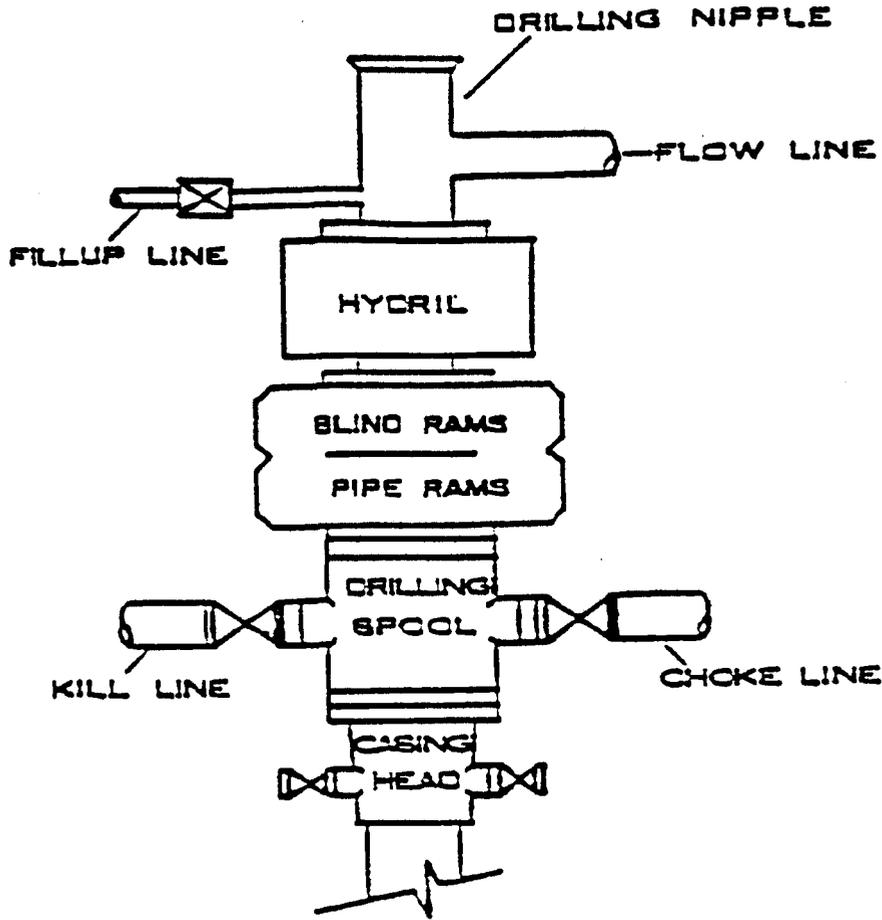

002

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 05/01/2002

API NO. ASSIGNED: 43-047-34569

WELL NAME: TRIBAL 2-207
OPERATOR: EL PASO PROD OIL & GAS (N1845)
CONTACT: SHEILA UPCHEGO

PHONE NUMBER: 435-781-7024

PROPOSED LOCATION:

NENE 02 090S 210E
SURFACE: 1145 FNL 0875 FEL
BOTTOM: 1145 FNL 0875 FEL
UINTAH
NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 2 - Indian
LEASE NUMBER: 14-20-H62-2888
SURFACE OWNER: 2 - Indian
PROPOSED FORMATION: WSTC

LATITUDE: 40.06937
LONGITUDE: -109.5120

RECEIVED AND/OR REVIEWED:


- Plat
- Bond: Fed[] Ind[2] Sta[] Fee[]
(No. 103601476)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 43-8496)
- RDCC Review (Y/N)
(Date:)
- Fee Surf Agreement (Y/N)

LOCATION AND SITING:


- R649-2-3.
Unit _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: 173-13 (8/320)
Eff Date: 3-24-99
Siting: 460 Fr Drilling Unit boundary
920' Fr another well
- R649-3-11: Directional Drill

COMMENTS: _____

STIPULATIONS: 1- Federal approval

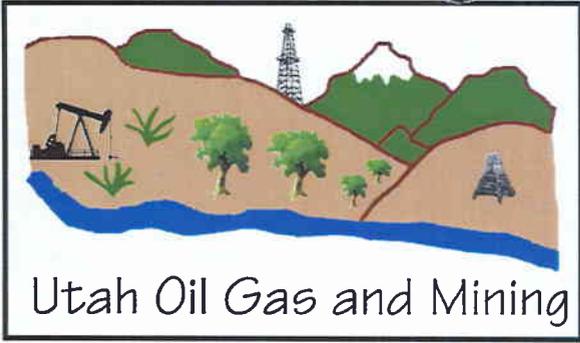

OPERATOR: EL PASO PROD O&G (N1845)
SEC. 2, T9S, R21E
FIELD: NATURAL BUTTES (630)
COUNTY: UINTAH CAUSE NO: 173-13 (8/320')

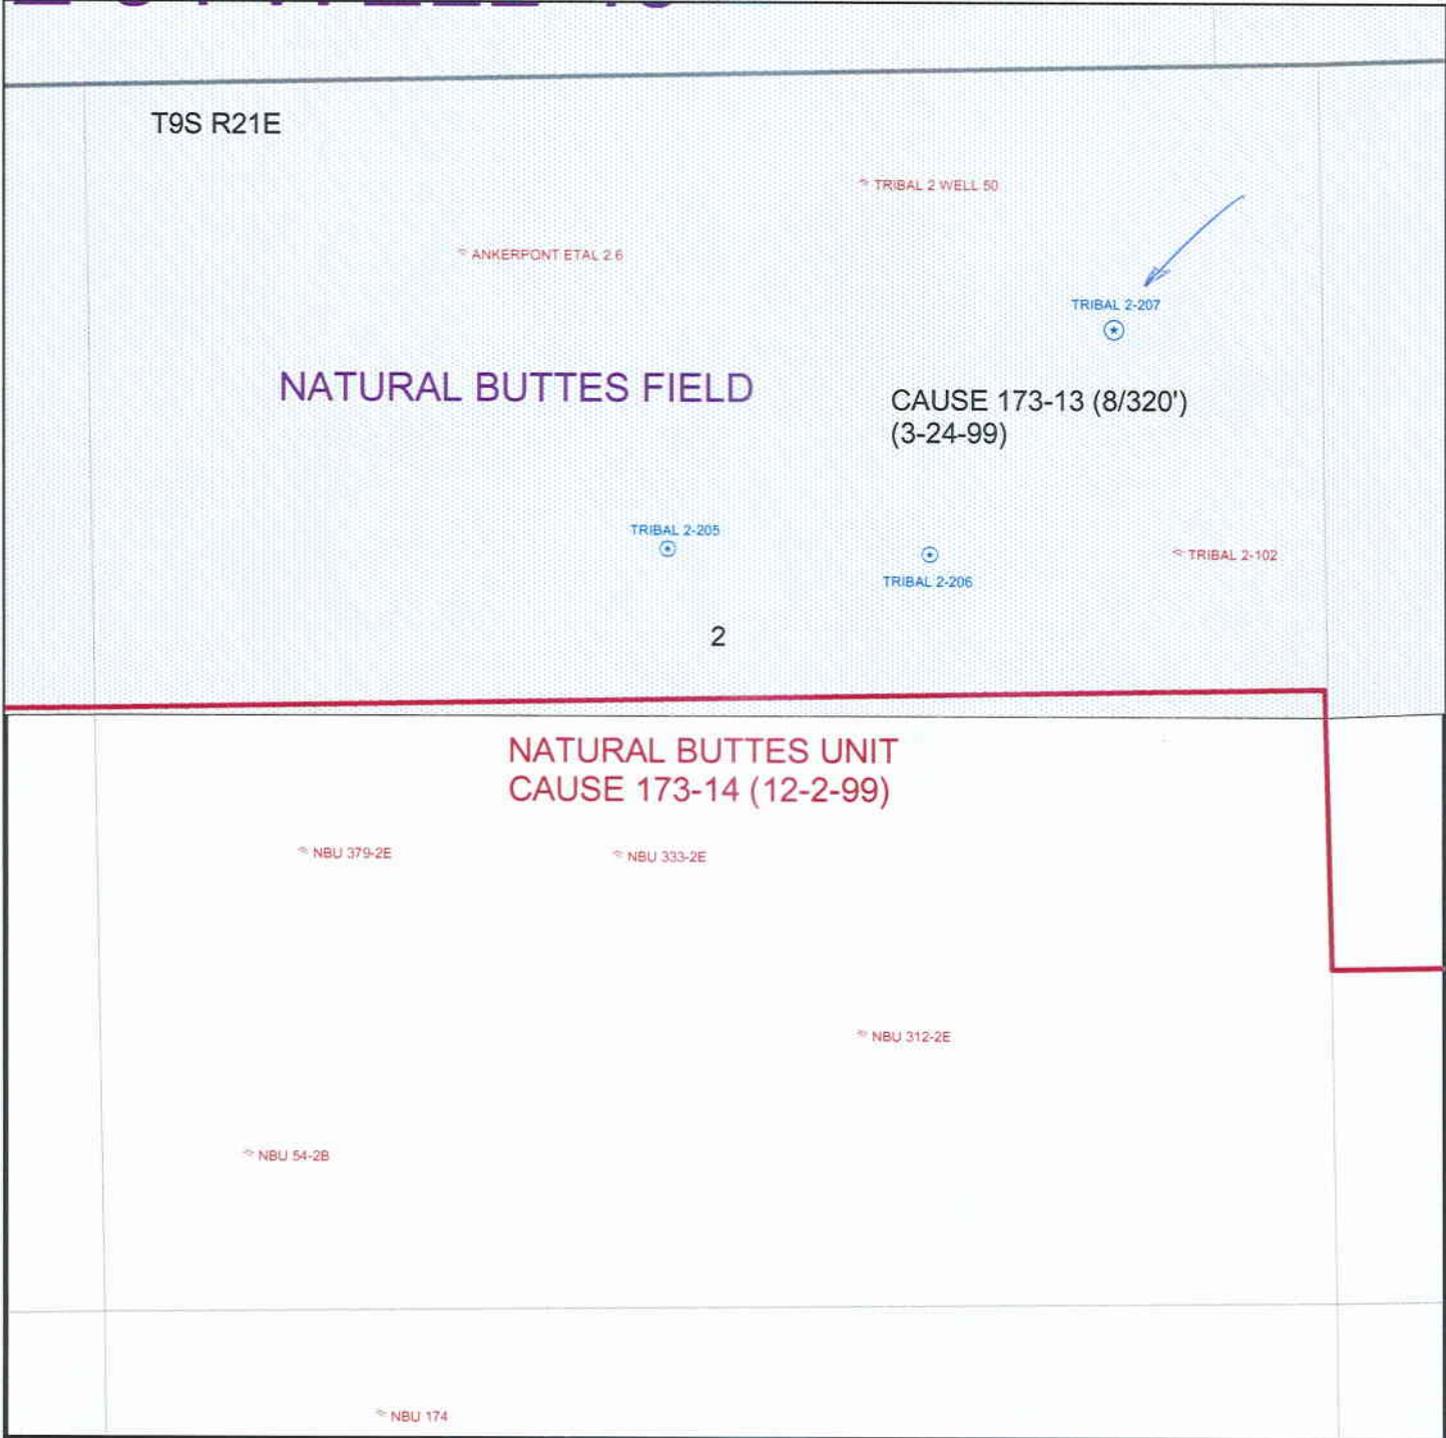

003



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt
Governor
Kathleen Clarke
Executive Director
Lowell P. Braxton
Division Director

1594 West North Temple, Suite 1210
PO Box 145801
Salt Lake City, Utah 84114-5801
801-538-5340
801-359-3940 (Fax)
801-538-7223 (TDD)

May 14, 2002

El Paso Production Oil & Gas Company
P O Box 1148
Vernal, UT 84078

Re: Tribal 2-207 Well, 1145' FNL, 875' FEL, NENE, Sec. 2, T. 9 South, R. 21 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-34569.

Sincerely,

A handwritten signature in black ink, appearing to read "John R. Baza".

John R. Baza
Associate Director

pb

Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: El Paso Production Oil & Gas Company
Well Name & Number Tribal 2-207
API Number: 43-047-34569
Lease: 14-20-H62-2888

Location: NENE Sec. 2 T. 9 South R. 21 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

5. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

RECEIVED

APR 30 2002

FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. 14-20-H62-2888
b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name Ute Tribe
2. Name of Operator El Paso Production Oil & Gas Company		7. If Unit or CA Agreement, Name and No. 9C-187
3A. Address P.O. Box 1148 Vernal, Utah 84078	3b. Phone No. (include area code) (435)-781-7024	8. Lease Name and Well No. Tribal #2-207
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NENE 1145'FNL & 875'FEL At proposed prod. Zone		9. API Well No.
14. Distance in miles and direction from nearest town or post office* 16.4 Miles Southeast of Ouray, Utah		10. Field and Pool, or Exploratory Natural Buttes
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 875'	16. No. of Acres in lease 324.16	11. Sec., T., R., M., or Blk, and Survey or Area Section 2-T9S-R21E
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Refer to Topo C	19. Proposed Depth 6800'	12. County or Parish Uintah
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 4687.9' Ungraded GL	20. BLM/BIA Bond No. on file BIA: #103601476	13. State Utah
22. Approximate date work will start* Upon Approval		17. Spacing Unit dedicated to this well 320
23. Estimated duration To Be Determined		

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized office. |

25. Signature <i>Sheila Upchego</i>	Name (Printed/Typed) Sheila Upchego	Date 4/29/2002
Title Regulatory Analyst		
Approved by (Signature) <i>Howard J. Leavitt</i>	Name (Printed/Typed)	Date 07/29/2002
Title Assistant Field Manager Mineral Resources	Office	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

NOTICE OF APPROVAL

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

RECEIVED

JUL 29 2002

DIVISION OF
OIL, GAS AND MINING

CONDITIONS OF APPROVAL ATTACHED

CONDITIONS OF APPROVAL

Company/Operator: El Paso Production Oil & Gas Company

Well Name & Number: Tribal 2-207

API Number: 43-047-34569

Lease Number: 14-20-H62-2888

Location: NENE Sec. 02, T9 S, R 21 E

Agreement: C.A. 9C-187

NOTIFICATION REQUIREMENTS

- | | | |
|---------------------------------|---|---|
| Location Construction | - | at least forty-eight (48) hours prior to construction of location and access roads. |
| Location Completion | - | prior to moving on the drilling rig. |
| Spud Notice | - | at least twenty-four (24) hours prior to spudding the well. |
| Casing String and Cementing | - | at least twenty-four (24) hours prior to running casing and cementing all casing strings. |
| BOP and Related Equipment Tests | - | at least twenty-four (24) hours prior to initiating pressure tests. |
| First Production | - | within five (5) business days after new well begins, or production resumes after well has been off production for more than ninety (90) days. |

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

CONDITIONS OF APPROVAL FOR NOTICE TO DEEPEN

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report **ALL** water shows and water-bearing sands to this office **prior to setting the next casing string or requesting plugging orders**. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a **3M** system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

If an air compressor is on location and is being utilized to provide air for the drilling medium while drilling, the special drilling requirements in Onshore Oil and Gas Order No. 2, regarding air or gas drilling shall be adhered to. If a mist system is being utilized then the requirement for a deduster shall be waived.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint.

As a minimum, the usable water and other mineral resources shall be isolated and/or protected by having a cement top for the production casing at least 200 ft. above the top of the Green River Formation, identified at $\pm 2,075$ ft.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the AO. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vaporproof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the AO.

A cement bond log (CBL) will be run from the production casing shoe to the top of the cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. One copy of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communication, not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5 (b.9. d.), and shall be submitted to the appropriate District Office within sixty (60) days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (b. 4).

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

6. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries. Tests for meter accuracy will be conducted following initial installation and at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

In the event after-hours approval or notification is necessary, please contact one of the following individuals:

Ed Forsman, Petroleum Engineer	(435) 828-7874
Kirk Fleetwood, Petroleum Engineer	(435) 828-7875
BLM FAX Machine	(435) 781-4410

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

- Unused fracturing fluids or acids
- Gas plant cooling tower cleaning wastes
- Painting wastes
- Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spend solvents, spilled chemicals, and waste acids
- Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste
- Refinery wastes
- Liquid and solid wastes generated by crude oil and tank bottom reclaimers
- Used equipment lubrication oils
- Waste compressor oil, filters, and blowdown
- Used hydraulic fluids
- Waste solvents
- Waste in transportation pipeline-related pits
- Caustic or acid cleaners
- Boiler cleaning wastes
- Boiler refractory bricks
- Incinerator ash
- Laboratory wastes
- Sanitary wastes
- Pesticide wastes
- Radioactive tracer wastes
- Drums, insulation and miscellaneous solids.

SURFACE USE PROGRAM CONDITIONS OF APPROVAL (COAs)

El Paso Production Oil and Gas Company (El Paso) will assure the Ute Tribe that any/all contractors and subcontractors have acquired a current Tribal Business License and have updated "Access Permits" prior to construction. All El Paso personnel, contractors and subcontractors will have these permits in their vehicles at all times. Companies that have not complied with this COA will be in violation of the Ute Tribal Business License Ordinance, and will be subject to fines and penalties.

El Paso employees, representatives, and/or authorized personnel (subcontractors) shall not carry firearms on their person or in their vehicles while working on the Uintah and Ouray Indian Reservation.

El Paso employees and/or authorized personnel (subcontractors) in the field will have approved applicable APDs and/or ROW permits/authorizations on their person(s) during all phases of construction.

El Paso will notify the Ute Tribe and Bureau of Indian Affairs (BIA) in writing of any requested modification of APDs or Rights-Of Way (ROW). El Paso shall receive written notification of authorization or denial of the requested modification. Without authorization, El Paso will be subject to fines and penalties.

The Ute Tribe Energy & Minerals Department shall be notified in writing 48 hours in advance of any construction activity. The Ute Tribal office is open Monday through Thursday. A Tribal Technician is to routinely monitor construction. El Paso shall make arrangements with the Ute Energy & Minerals Department for all monitoring that will exceed regular working hours for Tribal Technicians. A qualified Archaeologist accompanied by a Tribal Technician will monitor any trenching required for the construction of the pipeline construction. El Paso is to inform contractors to maintain construction of the pipelines within approved 60 foot right of ways.

A corridor ROW, 60 feet wide and 749 feet long, shall be granted for the pipeline and for the access road. The constructed travel width of the access road will be limited to 18 feet. Upon authorization by the Ute Tribe Energy & Minerals Department, the ROW may be wider where sharp curves; deep cuts and fills occur; or, where intersections with other roads are required. A 2 foot high berm shall be constructed around the location and irrigation ditches shall be rerouted as needed during the drilling and production operations.

The BIA will be consulted regarding whether the berm around the location will remain for production operations. El Paso shall build and maintain well pads and roads at natural ground level. El Paso shall also consult with BIA regarding any tree removal and replacement for Cottonwood trees affected by the proposed project. (The location was moved from the original staked location to reduce impacts to Cottonwood trees and be at least 460 feet from the White River.)

Production waters, oil, and other byproducts shall not be placed on access roads or the well pad.

Upon completion of each pipeline in the corridor an adequate description of the pipeline will be filed with the Ute Tribe Energy & Minerals Department.

Upon completion of the pertinent APD and ROWs, El Paso will notify the Ute Tribe Energy & Minerals Department for a Tribal Technician to verify the Affidavit of Completion.

All vehicular traffic, personnel movement, construction and restoration operations will be confined to the areas examined and approved and to the existing roadways and/or evaluated access routes.

El Paso will implement "Safety and Emergency Plan" and ensure plan compliance.

El Paso shall stop construction activities and notify personnel from the Ute Tribe Energy & Minerals Department and BIA if cultural remains including paleontologic resources (vertebrate fossils) are exposed or identified during construction. The Ute Tribe Department of Cultural Rights and Protection and the BIA will provide mitigation measures prior to allowing construction.

El Paso employees and/or authorized personnel (subcontractors) will not be allowed to collect artifacts and paleontologic fossils. No significant cultural resources shall be disturbed.

El Paso will control noxious weeds on the well site and ROWs. El Paso will be responsible for noxious weed control if weeds spread from the project area onto adjoining land.

No reserve pit will be used. The well will be drilled using a closed loop system.

A closed system will be used during production. This means that production fluids will be contained in leak-proof tanks. All production fluids from the proposed well will be contained in a common water tank(s) at the CTB #E2S, Section 2, T9S, R21E, and will then be hauled to one of the pre-approved disposal sites listed in the APD.

Buried pipelines shall be buried a minimum of 3 feet below the soil surface. After construction is completed the disturbed area shall be contoured to blend into the natural landscape and be reseeded between September 15 and November 1 of the year following construction with perennial vegetation seed mixture provided by the BIA or Ute Tribe.

Before the site is abandoned, El Paso will be required to restore the well site and ROWs to near their original state. The disturbed areas will be reseeded with desirable perennial vegetation.

Soil erosion will be mitigated by reseeding all disturbed areas.

The following Surface Protection / Rehabilitation conditions apply for El Paso wells in the floodplains and have been included in the site specific Environmental Analysis for this location: Many of these have been incorporated into the APD.

-El Paso will strictly follow the procedures approved for down hole drilling operations.

-El Paso's Construction activities will be monitored by Tribal Technicians and BIA.

-El Paso will not conduct drilling operations or construction activities in the 100 year floodplains during seasonal high water conditions.

-El Paso will design and construct well pads and roads so as not to impede surface water flow or interfere with fish movements during high water seasons. Also locations shall have drainage designed and installed to allow for natural flow movement of receding floodwaters. The tundra pad, and gravel base will be installed across floodplain areas for well pads and well locations and removed by El Paso or El Paso's subcontractors prior to seasonal high water conditions.

-El Paso will periodically pressure test all buried pipelines which cross floodplain habitat to ensure that the buried pipelines are free of leaks and are in good condition.

-If the river channel moves within 100 feet of the well head, the El Paso shall shut the well in and plug it immediately unless geologic or hydro-morphology survey determines that the well head is not of risk for damage from the river.

-El Paso shall conduct production sampling and report quarterly gas production.

-The El Paso Floodplain Wells shall have a dual pipeline system consisting of a flowline and a pressure relief line. The installation of the pipeline system for each of these wells is limited to a one time excavation.

-All El Paso central tank batteries must be constructed outside of the flood plain.

-El Paso shall use a closed loop drilling system.

-El Paso shall build and maintain well pads and roads at natural ground level.

-El Paso will elevate above ground well heads and El Paso will use telemetry to control flow and shut down of production in emergency situations.

-El Paso will conduct or have subcontractors conduct routine monitoring of soil and water quality for contamination.

-El Paso will maintain daily surveillance of the production operations through the use of Electronic flow meters.

memorandum

Branch of Real Estate Services
Uintah & Ouray Agency

Date: 5 December, 2002

Reply to:
Attn of: Supervisory Petroleum Engineer

Subject: Modification of Utah Division of Oil, Gas and Mining Regulations

To: Director, Utah Division of Oil, Gas and Mining Division: John Baza

We have been advised of changes occurring with the operation of your database for Change of Operator. You will be modifying your records to reflect Change of Operator once you have received all necessary documentation from the companies involved, and perhaps in advance of our Notice of Concurrence/Approval of Change of Operator where Indian leases are involved.


We have no objection.

With further comment to Rulemaking, I wish to comment concerning the provision of Exhibits for upcoming Hearings. I would like to see the Uintah & Ouray Agency, BIA, and the Ute Indian Tribe, Energy & Mineral Resources Department added to the list of those parties that receive advance Exhibits so as to allow us to have research time prior to Hearing dates. We will be able to provide a more informed recommendation to the Oil, Gas and Mining Board. It would be best if we would receive only those Exhibits that concern Indian lands, specifically on or adjacent to Indian lands. This may be a difficult situation to attain, as it is not always clear where 'on or adjacent' occurs.

I am aware that you have gone to extra effort to correct this matter already, and I fully appreciate it. My request is intended only to allow the addition of Uintah & Ouray Agency and Ute Indian Tribe to the official listing.

We appreciate your concern, and hope that these comments are timely enough for consideration in the revision process.

CC: Minerals & Mining Section of RES
Ute Energy & Mineral Resources Department: Executive Director
chrono





IN REPLY REFER TO:
Real Estate Services

United States Department of the Interior

BUREAU OF INDIAN AFFAIRS

Washington, D.C. 20240

FEB 10 2003

Carroll A. Wilson
Principal Landman
Westport Oil and Gas Company, L.P.
1368 South 1200 East
Vernal, Utah 84078

Dear Mr. Wilson:

This is in response to your request for approval of RLI Insurance Company's Nationwide Oil and Gas Lease Bond No. RLB0005239 executed effective December 17, 2002, (\$150,000 coverage) with Westport Oil and Gas Company, L. P., as principal.

This bond is hereby approved as of the date of this correspondence and will be retained in the Bureau of Indian Affairs' Division of Real Estate Services, 1849 C Street, NW, MS-4512-MIB, Washington, D.C. 20240. All Bureau oil and gas regional offices and the surety are being informed of this action.

In cases where you have existing individual and/or collective bonds on file with one or more of our regional offices, you may now request those offices, directly, to terminate in lieu of coverage under this Nationwide Bond.

Enclosed is a copy of the approved bond for your files. If we may be of further assistance in this matter, please advise.

Sincerely,

Director, Office of Trust Responsibilities

ACTING

Enclosure

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER:
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME:
2. NAME OF OPERATOR: El Paso Production Oil & Gas Company		8. WELL NAME and NUMBER: Exhibit "A"
3. ADDRESS OF OPERATOR: 9 Greenway Plaza Houston TX 77064-0995		9. API NUMBER:
PHONE NUMBER: (832) 676-5933		10. FIELD AND POOL, OR WILDCAT:
4. LOCATION OF WELL FOOTAGES AT SURFACE: _____ COUNTY: _____ QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: _____ STATE: UTAH		


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.


Operator change to Westport Oil and Gas Company, L.P., 1670 Broadway, Suite 2800, Denver, CO. 80202-4800, effective December 17, 2002.

BOND # _____
State Surety Bond No. RLB0005236
Fee Bond No. RLB0005238

EL PASO PRODUCTION OIL & GAS COMPANY

By: 
Jon R. Nelsen, Attorney-in-Fact

RECEIVED
FEB 28 2003
DIV. OF OIL, GAS & MINING

WESTPORT OIL AND GAS COMPANY, L.P.	
NAME (PLEASE PRINT) <u>David R. Dix</u>	TITLE <u>Agent and Attorney-in-Fact</u>
SIGNATURE 	DATE <u>12/17/02</u>

(This space for State use only)

Form 3160-5
(August 1999)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or reenter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY, L.P.

3a. Address
P.O. BOX 1148 VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7023

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEE ATTACHED EXHIBIT "A"

5. Lease Serial No.
SEE ATTACHED EXHIBIT "A"

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
SEE ATTACHED EXHIBIT "A"

9. API Well No.
SEE ATTACHED EXHIBIT "A"

10. Field and Pool, or Exploratory Area

11. County or Parish, State
UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	SUCCESSOR OF
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	OPERATOR

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zone. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed if testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator determined that the site is ready for final inspection.

WESTPORT OIL & GAS COMPANY, L.P., IS CONSIDERED TO BE THE OPERATOR ON THE ATTACHED DESCRIBED LANDS AND IS RESPONSIBLE UNDER THE TERMS AND CONDITIONS OF THE LEASE FOR THE OPERATIONS CONDUCTED ON THE LEASED LANDS OR PORTIONS THEREOF, BOND COVERAGE FOR THIS WELL IS PROVIDED BY FEDERAL NATIONWIDE BOND NO. 158626364, EFFECTIVE FEBRUARY 1, 2002, AND BIA NATIONWIDE BOND NO. RLB0005239, EFFECTIVE FEBRUARY 10, 2003.

RECEIVED
MAR 04 2003

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)
CHERYL CAMERON

Title
OPERATIONS

Signature

Date
March 4, 2003

DIV. OF OIL, GAS & MINING

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

OPERATOR CHANGE WORKSHEET

005

ROUTING

1. GLH
2. CDW <input checked="" type="checkbox"/>
3. FILE

X Change of Operator (Well Sold)

Designation of Agent/Operator

Operator Name Change

Merger

The operator of the well(s) listed below has changed, effective: **12-17-02**

FROM: (Old Operator):	TO: (New Operator):
EL PASO PRODUCTION OIL & GAS COMPANY	WESTPORT OIL & GAS COMPANY LP
Address: 9 GREENWAY PLAZA	Address: P O BOX 1148
HOUSTON, TX 77064-0995	VERNAL, UT 84078
Phone: 1-(832)-676-5933	Phone: 1-(435)-781-7023
Account No. N1845	Account No. N2115

CA No.

Unit:

WELL(S)

NAME	SEC TWN RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
TRIBAL 1-205	02-09S-21E	43-047-34524	99999	INDIAN	GW	APD
TRIBAL 2-206	02-09S-21E	43-047-34478	13541	INDIAN	GW	P
TRIBAL 2-207	02-09S-21E	43-047-34569	99999	INDIAN	GW	APD
TRIBAL 2-102	02-09S-21E	43-047-33379	13023	INDIAN	GW	P
TRIBAL 2 50	02-09S-21E	43-047-32698	11868	INDIAN	GW	P
ANKERPONT 2-6	02-09S-21E	43-047-30572	75	INDIAN	GW	P
PAWWINNEE ETAL 3-10	03-09S-21E	43-047-30662	85	INDIAN	GW	P
SHOYO 37	03-09S-21E	43-047-32535	11714	INDIAN	GW	PA
SHOYO 37 37A	03-09S-21E	43-047-32655	11737	INDIAN	GW	S
SHOYO 3-59	03-09S-21E	43-047-33277	12553	INDIAN	GW	P
SHOYO 3-162	03-09S-21E	43-047-33868	13242	INDIAN	GW	P
PAWWINNEE 3-181	03-09S-21E	43-047-34019	13283	INDIAN	GW	P
OURAY 3-74	03-09S-21E	43-047-33278	99999	INDIAN	GW	APD
OURAY 3-75	03-09S-21E	43-047-34424	99999	INDIAN	GW	APD
SERAWOP 4-13	04-09S-21E	43-047-30663	191	INDIAN	GW	P
SERAWOP 4-46	04-09S-21E	43-047-33504	99999	INDIAN	GW	APD
SERAWOP 4-103	04-09S-21E	43-047-33376	99999	INDIAN	GW	APD
BLUE FEATHER 4-30 (CR-84C721)	04-09S-21E	43-047-31000	190	INDIAN	GW	P
SANTIO 4-191	04-09S-21E	43-047-34048	99999	INDIAN	GW	APD
CESSPOOCH ETAL 5 14 (CR-4)	05-09S-21E	43-047-30675	90	FEDERAL	GW	P

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 02/28/2003
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 03/04/2003
3. The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 03/06/2003
4. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
5. If **NO**, the operator was contacted on: _____

6. (R649-9-2)Waste Management Plan has been received on: IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM-12/31/2003 BIA-12/5/02

8. **Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: 02/27/2003

9. **Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: 01/09/2003

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

DATA ENTRY:

1. Changes entered in the **Oil and Gas Database** on: 03/26/2003
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 03/26/2003
3. Bond information entered in RBDMS on: N/A
4. Fee wells attached to bond in RBDMS on: N/A

STATE WELL(S) BOND VERIFICATION:

1. State well(s) covered by Bond Number: RLB 0005236

FEDERAL WELL(S) BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: 158626364

INDIAN WELL(S) BOND VERIFICATION:

1. Indian well(s) covered by Bond Number: RLB 0005239

FEE WELL(S) BOND VERIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB 0005238

2. The **FORMER** operator has requested a release of liability from their bond on: N/A

The Division sent response by letter on: N/A

LEASE INTEREST OWNER NOTIFICATION:

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: N/A

COMMENTS:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

006

5. Lease Serial No. 1420H622888
6. If Indian, Allottee or Tribe Name UINTAH AND OURAY
7. If Unit or CA/Agreement, Name and/or No. UTU58880
8. Well Name and No. TRIBAL 2-207
9. API Well No. 43-047-34569-00-X1
10. Field and Pool, or Exploratory NATURAL BUTTES
11. County or Parish, and State UINTAH COUNTY, UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
EL PASO PROD OIL & GAS CO
Contact: SHEILA UPCHEGO
E-Mail: supchego@westportresourcescorp.com

3a. Address
P.O. BOX 1148
VERNAL, UT 84078

3b. Phone No. (include area code)
Ph: 435.781.7024
Fx: 435.781.7094

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 2 T9S R21E NENE 1145FNL 875FEL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off	
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity	
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Change to Original APD	
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon		
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal		

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

THE OPERATOR REQUESTS THAT THE APD FOR THE SUBJECT WELL BE EXTENDED FOR AN ADDITIONAL YEAR, SO THAT DRILLING OPERATIONS MAY BE COMPLETED.

14. I hereby certify that the foregoing is true and correct.

**Electronic Submission #22019 verified by the BLM Well Information System
For EL PASO PROD OIL & GAS CO, sent to the Vernal
Committed to AFMSS for processing by LESLIE WALKER on 06/03/2003 (03LW1637SE)**

Name (Printed/Typed) SHEILA UPCHEGO	Title REGULATORY ANALYST
Signature (Electronic Submission)	Date 05/19/2003

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By <u>KIRK FLEETWOOD</u>	Title <u>PETROLEUM ENGINEER</u>	Date <u>06/05/2003</u>
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office <u>Vernal</u>

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Revisions to Operator-Submitted EC Data for Sundry Notice #22019

	Operator Submitted	BLM Revised (AFMSS)
Sundry Type:	OTHER NOI	APDCH NOI
Lease:	14-20-H62-2888	1420H622888
Agreement:		UTU58880
Operator:	WESTPORT OIL & GAS COMPANY L.P P.O. BOX 1148 VERNAL, UT 84078 Ph: 435.781.7024 Fx: 435.781.7094	EL PASO PROD OIL & GAS CO P.O. BOX 1148 VERNAL, UT 84078 Ph: 435 789 4433 Fx: 435 789 4436
Admin Contact:	SHEILA UPCHEGO OPERATIONS E-Mail: supchego@westportresourcescorp.com Ph: 435.781.7024 Fx: 435.781.7094	SHEILA UPCHEGO REGULATORY ANALYST E-Mail: supchego@westportresourcescorp.com Ph: 435.781.7024 Fx: 435.781.7094
Tech Contact:	SHEILA UPCHEGO REGULATORY ANALYST E-Mail: sheila.upchego@westportresourcescorp.com Ph: 435.781.7024 Fx: 435.781.7094	SHEILA UPCHEGO REGULATORY ANALYST E-Mail: supchego@westportresourcescorp.com Ph: 435.781.7024 Fx: 435.781.7094
Location:		
State:	UT	UT
County:	UINTAH	UINTAH
Field/Pool:	NATURAL BUTTES	NATURAL BUTTES
Well/Facility:	TRIBAL 2-207 Sec 2 T9S R21E NENE 1145FNL 875FEL	TRIBAL 2-207 Sec 2 T9S R21E NENE 1145FNL 875FEL

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

008

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
1420H622888

6. If Indian, Allottee or Tribe Name
UINTAH AND OURAY

7. If Unit or CA/Agreement, Name and/or No.
UTU58880

8. Well Name and No.
TRIBAL 2-207

9. API Well No.
48-047-34569-00-X1

10. Field and Pool, or Exploratory
NATURAL BUTTES

11. County or Parish, and State
UINTAH COUNTY, UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
EL PASO PROD OIL & GAS CO
Contact: SHEILA UPCHEGO
E-Mail: sheila.upchego@westportresourcesco

3a. Address
P.O. BOX 1148
VERNAL, UT 84078

3b. Phone No. (include area code)
Ph: 435.781.7024
Fx: 435.781.7094

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 2 T9S R21E NENE 1145FNL 875FEL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original A
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	PD

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

THE OPERATOR REQUESTS THAT THE APD FOR THE SUBJECT WELL BE EXTENDED FOR AN ADDITIONAL YEAR, SO THAT DRILLING OPERATIONS MAY BE COMPLETED.

14. I hereby certify that the foregoing is true and correct.

**Electronic Submission #22019 verified by the BLM Well Information System
For EL PASO PROD OIL & GAS CO, sent to the Vernal
Committed to AFMSS for processing by LESLIE WALKER on 06/03/2003 (03LW1637SE)**

Name (Printed/Typed) SHEILA UPCHEGO	Title REGULATORY ANALYST
Signature (Electronic Submission)	Date 05/19/2003

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By <u>KIRK FLEETWOOD</u>	Title <u>PETROLEUM ENGINEER</u>	Date <u>06/05/2003</u>
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office <u>Vernal</u>

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Revisions to Operator-Submitted EC Data for Sundry Notice #22019

	Operator Submitted	BLM Revised (AFMSS)
Sundry Type:	OTHER NOI	APDCH NOI
Lease:	14-20-H62-2888	1420H622888
Agreement:		UTU58880
Operator:	WESTPORT OIL & GAS COMPANY L.P P.O. BOX 1148 VERNAL, UT 84078 Ph: 435.781.7024 Fx: 435.781.7094	EL PASO PROD OIL & GAS CO P.O. BOX 1148 VERNAL, UT 84078 Ph: 435 789 4433 Fx: 435 789 4436
Admin Contact:	SHEILA UPCHEGO OPERATIONS E-Mail: supchego@westportresourcescorp.com Ph: 435.781.7024 Fx: 435.781.7094	SHEILA UPCHEGO REGULATORY ANALYST E-Mail: sheila.upchego@westportresourcescorp.com Ph: 435.781.7024 Fx: 435.781.7094
Tech Contact:	SHEILA UPCHEGO REGULATORY ANALYST E-Mail: sheila.upchego@westportresourcescorp.com Ph: 435.781.7024 Fx: 435.781.7094	SHEILA UPCHEGO REGULATORY ANALYST E-Mail: sheila.upchego@westportresourcescorp.com Ph: 435.781.7024 Fx: 435.781.7094
Location:		
State:	UT	UT
County:	UINTAH	UINTAH
Field/Pool:	NATURAL BUTTES	NATURAL BUTTES
Well/Facility:	TRIBAL 2-207 Sec 2 T9S R21E NENE 1145FNL 875FEL	TRIBAL 2-207 Sec 2 T9S R21E NENE 1145FNL 875FEL

Westport Oil and Gas Company L.P.
APD Extension

Well: Tribal 2-207

Location: NENE Sec. 2, T9S, R21E

Lease: 1420-H62-2888

Conditions of Approval

An extension for the referenced APD is granted with the following condition(s):

1. The extension will expire 5/02/04
2. No other extensions beyond that time frame will be granted or allowed.

If you have any other questions concerning this matter, please contact Kirk Fleetwood at (435) 781-4486.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

007

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

CONFIDENTIAL

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. 14-20-H62-2888
2. Name of Operator WESTPORT OIL & GAS COMPANY L.P		6. If Indian, Allottee or Tribe Name UTE TRIBE
3a. Address P.O. BOX 1148 VERNAL, UT 84078		7. If Unit or CA/Agreement, Name and/or No.
3b. Phone No. (include area code) Ph: 435.781.7024 Fx: 435.781.7094		8. Well Name and No. TRIBAL 2-207
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 2 T9S R21E NENE 1145FNL 875FEL		9. API Well No. 43-047-34569
		10. Field and Pool, or Exploratory NATURAL BUTTES
		11. County or Parish, and State UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize <input type="checkbox"/> Deepen <input type="checkbox"/> Production (Start/Resume) <input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing <input type="checkbox"/> Fracture Treat <input type="checkbox"/> Reclamation <input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair <input type="checkbox"/> New Construction <input type="checkbox"/> Recomplete <input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans <input type="checkbox"/> Plug and Abandon <input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection <input type="checkbox"/> Plug Back <input type="checkbox"/> Water Disposal

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

THE OPERATOR REQUESTS THAT THE APD FOR THE SUBJECT WELL BE EXTENDED FOR AN ADDITIONAL YEAR, SO THAT DRILLING OPERATIONS MAY BE COMPLETED.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: 06-30-03
By: [Signature]

**RECEIVED
JUN 26 2003**

DIV. OF OIL, GAS & MINING

COPY SENT TO OPERATOR
Date: 07-01-03
Initials: CHD

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #22019 verified by the BLM Well Information System
For WESTPORT OIL & GAS COMPANY L.P, sent to the Vernal
Committed to AFMSS for processing by LESLIE WALKER on 06/03/2003 ()

Name (Printed/Typed) SHEILA UPCHEGO	Title REGULATORY ANALYST
Signature <u>[Signature]</u> (Electronic Submission)	Date 05/19/2003

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ****

CONFIDENTIAL

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-34569
Well Name: TRIBAL #2-207
Location: NATURAL BUTTES
Company Permit Issued to: WESTPORT OIL & GAS COMPANY L.P.
Date Original Permit Issued: 5/14/2002

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No


Signature

6/17/2003

Date

Title: REGULATORY ANALYST

Representing: WESTPORT OIL & GAS CO., L.P.



State of Utah

Department of
Natural ResourcesROBERT L. MORGAN
*Executive Director*Division of
Oil, Gas & MiningLOWELL P. BRAXTON
*Division Director*OLENE S. WALKER
*Governor*GAYLE F. McKEACHNIE
Lieutenant Governor

July 22, 2004

Sheila Upchego
Westport Resources Corp.
1368 South 1200 East
Vernal UT 84078Re: APD Rescinded – Tribal 2-207, Sec. 2, T. 9S, R. 21E Uintah County, Utah
API No. 43-047-34569


Dear Ms. Upchego:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on May 14, 2002. On June 30, 2003, the Division granted a one-year APD extension. On July 22, 2004, you requested that the division rescind the state approved APD. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective July 22, 2004.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,



Diana Whitney
Engineering Technician

cc: Well File
Bureau of Land Management, Vernal



United States Department of the Interior
BUREAU OF LAND MANAGEMENT

Vernal Field Office
170 South 500 East
Vernal, UT 84078

(435) 781-4400 Fax: (435) 781-4410
<http://www.blm.gov/utah/vernal>



IN REPLY REFER TO:

3160
UT08300

August 19, 2004

Sheila Upchego
Westport Oil & Gas Co.
1368 South 1200 East
Vernal, UT 84078

43-047-34569
Re: Notification of Expiration
Well No. Tribal 2-207
NENE, Sec. 2, T9S, R21E
Uintah County, Utah
Lease No. 14-20-H62-2888
CA No. 9C-187

Dear Ms. Upchego:

The Application for Permit to Drill the above-referenced well was approved on July 24, 2002. A one (1) year extension of the original APD was requested. The request was reviewed and the extension approved until July 24, 2004. According to our records, no known activity has transpired at the approved location. In view of the foregoing, this office is notifying you that the approval of the referenced application has expired. If you intend to drill at this location in the future, a new Application for Permit to Drill must be submitted.

This office requires a letter confirming that no surface disturbance has been made for this drill site. Any surface disturbance associated with the approved location of this well is to be rehabilitated. A schedule for this rehabilitation must be submitted to this office. Your cooperation in this matter is appreciated.

Sincerely,

Leslie Walker

Leslie Walker
Legal Instruments Examiner

cc: UDOGM
BIA
Ute Tribe

RECEIVED
AUG 23 2004
DIV. OF OIL, GAS & MINING