


T8S, R22E, S.L.B.&M.

WEST - 80.00 (G.L.O.)

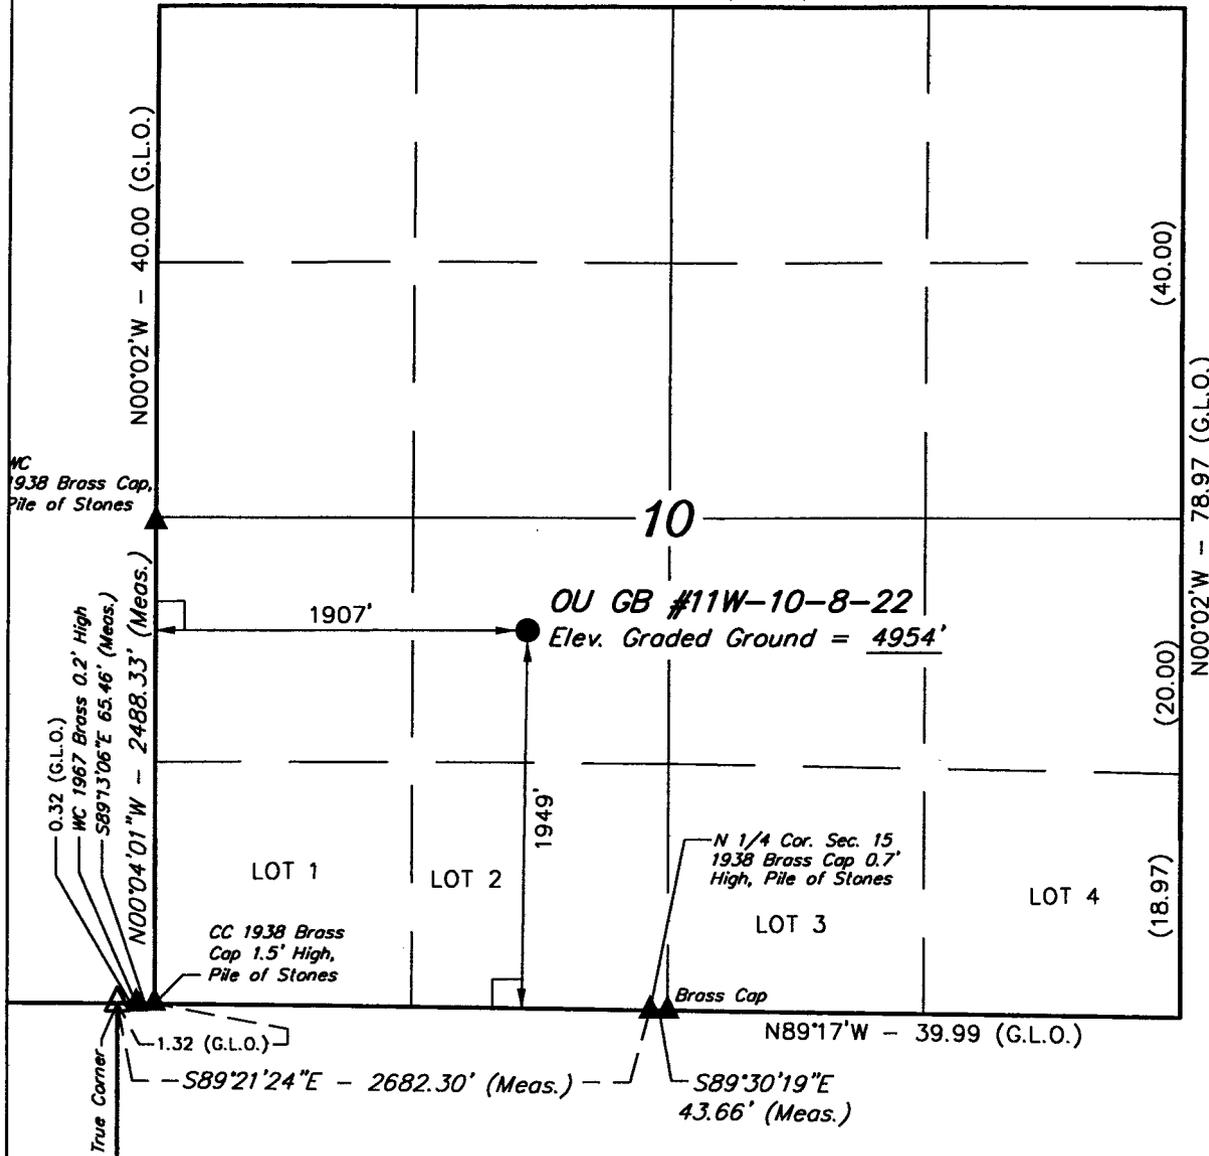

LEGEND:

- └ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.
- △ = SECTION CORNERS COMPUTED FROM G.L.O. (Not Set on Ground)

(NAD 83)

LATITUDE = 40°08'08.01" (40.135558)

LONGITUDE = 109°25'43.63" (109.428786)

SHENANDOAH ENERGY, INC.


Well location, OU GB #11W-10-8-22, located as shown in the NE 1/4 SW 1/4 of Section 10, T8S, R22E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

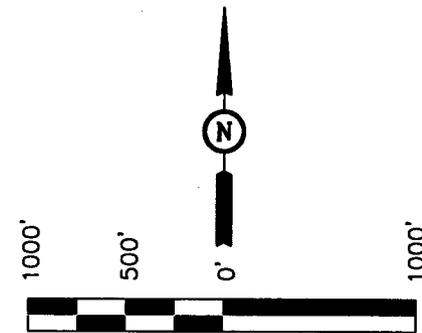

SCALE

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Robert H. Kay
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 161319
 STATE OF UTAH

UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 06-03-02	DATE DRAWN: 06-19-02
PARTY D.A. J.A. D.COX	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE SHENANDOAH ENERGY, INC.	

SHENANDOAH ENERGY INC.
OU GB 11W-10-8-22

ONSHORE OIL & GAS ORDER NO. 1
Approval of Operations on Onshore
Federal Oil and Gas Leases

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas No. 1, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

1. Formation Tops

The estimated tops of important geologic markers are as follows:

Formation	Depth
Uinta	Surface
Green River	2552
Mahogany Ledge	3537
Mesa	5997
TD (Wasatch)	7700

2. Anticipated Depths of Oil, Gas, Water and Other Mineral Bearing Zones

The estimated depths at which the top and bottom of the anticipated water, oil, gas or other mineral bearing formations are expected to be encountered are as follows:

Substance	Formation	Depth
Oil/Gas	Wasatch	7700

All fresh water and prospectively valuable minerals encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

All water shows and water-bearing sands will be reported to the BLM in Vernal, Utah. Copies of State of Utah form OGC-8-X are acceptable. If no flows are detected, samples will be submitted to the BLM along with any water analyses conducted.

3. Anticipated Bottom Hole Pressures

Maximum anticipated bottom hole pressure equals approximately 3080.0 psi.

**SHENANDOAH ENERGY INC.
OVER AND UNDER GLEN BENCH 11W-10-8-22
1949' FSL, 1907' FWL
NESW, 10, T8S, R22E
UINTAH COUNTY, UTAH
LEASE # U-43915**

ONSHORE ORDER NO. 1

MULTI – POINT SURFACE USE & OPERATIONS PLAN

An onsite inspection was conducted for the OU GB 11W-10-8-22 on July 11, 2002 at approximately 11:00 AM. Weather conditions were hot with high temperatures at the time of the onsite. In attendance at the inspection were the following individuals:

Byron Tolman	Bureau of Land Management
Stephanie Howard	Bureau of Land Management
Dixie Sadlier	Bureau of Land Management
Floyd Bartlett	Division of Wildlife Resources
Jan Nelson	Shenandoah Energy Inc.
Raleen Searle	Shenandoah Energy Inc.

1. Existing Roads:

The proposed well site is approximately 10 miles Southwest of Redwash, Utah.

Refer to Topo Maps A and B for location of access roads within a 2 – mile radius.

There will be no improvements made to existing access roads.

2. Planned Access Roads:

Please see Shenandoah Energy Inc. Standard Practices for Wasatch Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and undesignated fields in Townships 07 and 08 South, Ranges 21 to 24 East.

Refer to Topo Map B for the location of the proposed access road.

3. Location of Existing Wells Within a 1 – Mile Radius:

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities:

Please see Shenandoah Energy Inc. Standard Practices for Wasatch Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and undesignated fields in Townships 07 and 08 South, Ranges 21 to 24 East.

Refer to Topo Map D for the location of the proposed pipeline.

5. Location and Type of Water Supply:

Please see Shenandoah Energy Inc. Standard Practices for Wasatch Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and undesignated fields in Townships 07 and 08 South, Ranges 21 to 24 East.

6. Source of Construction Materials:

Please see Shenandoah Energy Inc. Standard Practices for Wasatch Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and undesignated fields in Townships 07 and 08 South, Ranges 21 to 24 East.

7. Methods of Handling Waste Materials:

Please see Shenandoah Energy Inc. Standard Practices for Wasatch Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and undesignated fields in Townships 07 and 08 South, Ranges 21 to 24 East.

8. Ancillary Facilities:

Please see Shenandoah Energy Inc. Standard Practices for Wasatch Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and undesignated fields in Townships 07 and 08 South, Ranges 21 to 24 East.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

A pit liner is required.

10. Plans for Reclamation of the Surface:

Please see Shenandoah energy Inc. Standard Operating Practices for Wasatch Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and undesignated fields in Township 07 and 08 South, Ranges 21 to 24 East.

Seed mix #5:

Gardner saltbush	A triplex gardneri	6lbs/acre
Shadescale	A triplex confretifolia	3lbs/acre
Cresta wheatgrass		3lbs/acre

11. Surface Ownership:

The well pad and access road are located on lands owned by:

Bureau of Land Management
170 South 500 East
Vernal, Utah 84078
(435) 781-4400

12. Other Information

A Class III archaeological survey was conducted by Montgomery Archaeology Consultants. A copy of this report was submitted directly to the appropriate agencies by Montgomery Archaeology Consultants. Cultural resource clearance was recommended for this location.

A rights-of-way will be required for the part of the road that travels off lease in section 10. The part of the road that travels off lease is 150' +/- in length with 30' in width with a running surface of 18' it will be crowned (2%-3%) and ditched.

Lessee's or Operator's Representative:

John Busch
Red Wash Operations Rep.
Shenandoah Energy Inc.
11002 East 17500 South
Vernal, Utah 84078
(435) 781-4341

Certification:

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil & Gas Orders, the approved plan of operations, and any applicable Notice to Lessees.

Shenandoah Energy Inc. will be fully responsible for the actions of their subcontractors.

A complete copy of the approved Application for Permit to Drill will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Shenandoah Energy Inc. its' contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

John Busch
John Busch
Red Wash Operations Representative

30-Jul-02
Date

Additional Operator Remarks:

Shenandoah Energy Inc. proposes to drill a well to 7700' to test the Wasatch. If productive, casing will be run and the well completed. If dry, the well will be plugged and abandoned as per BLM and State of Utah requirements.

Please see Shenandoah Energy Inc. Standard Operating Practices for Wasatch Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and undesignated fields in Townships 07 and 08 South, Ranges 21 and 24 East.

See Onshore Order No. 1 attached


Please be advised that Shenandoah Energy Inc. agrees to be responsible under the terms and conditions of the lease for the operations conducted upon the lease lands.

Bond coverage for this well is provided by Bond No. U-0969. The principal is Shenandoah Energy Inc. via surety as consent as provided for the 43 CFR 3104.2.

SHENANDOAH ENERGY, INC.

FIGURE #1

LOCATION LAYOUT FOR
 OU GB #11W-10-8-22
 SECTION 10, T8S, R22E, S.L.B.&M.
 1949' FSL 1907' FWL

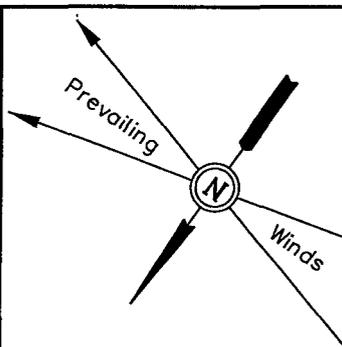



SCALE: 1" = 50'
 DATE: 06-19-02
 Drawn By: D.COX
 Revised: 07-18-02

CONSTRUCT DIVERSION DITCH

C-7.0' El. 61.1' 6
 C-7.9' El. 62.0' 8
 Sta. 3+25

NOTE:
 Flare Pit is to be located a min. of 100' from the Well Head.

Approx. Top of Cut Slope

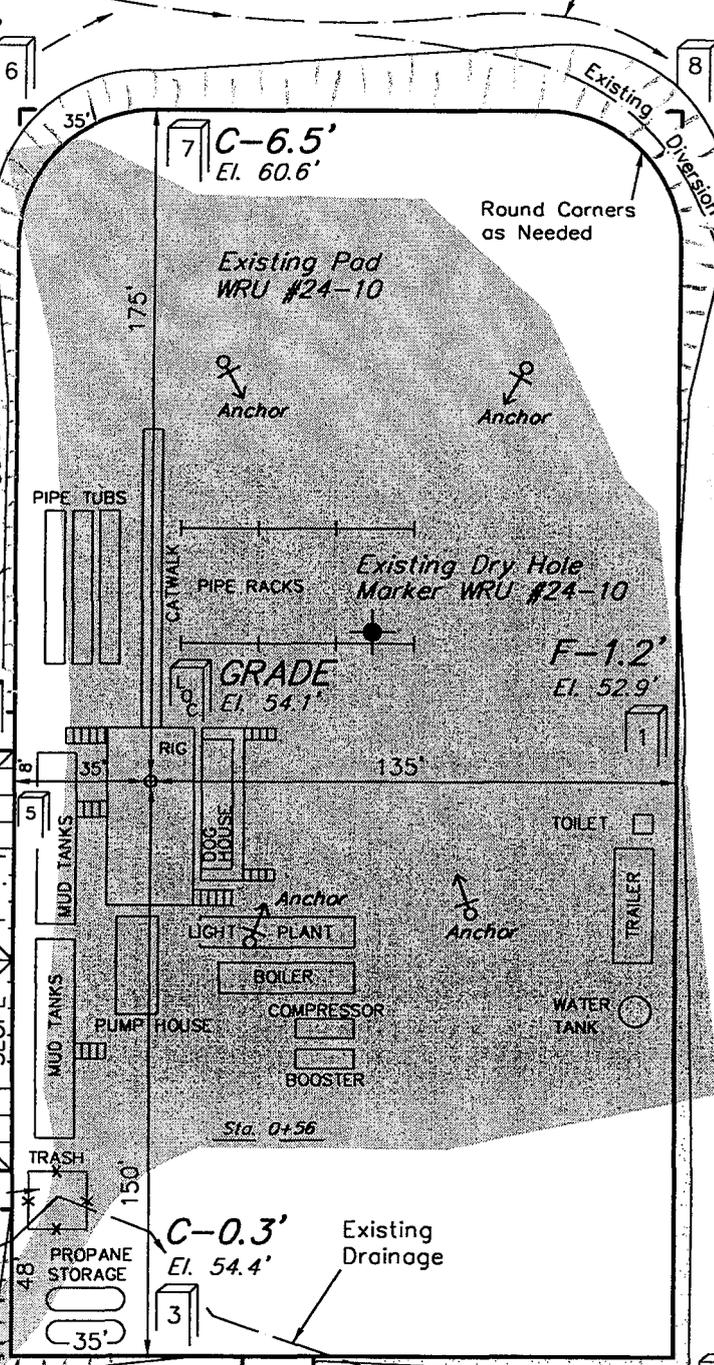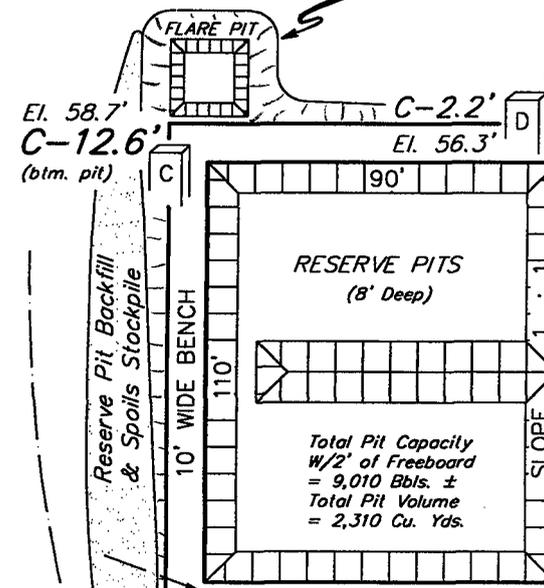

DeKang

Sta. 1+50

El. 55.4' C-9.3' (btm. pit)
 Existing Drainage
 El. 54.8' C-0.7'
 El. 54.4' C-0.3'

Existing Drainage
 El. 54.4' C-0.3'
 PROPRANE STORAGE
 35'

Sta. 0+00

CONSTRUCT DIVERSION DITCH

Existing Access Road

Proposed Access Road

24" CMP Required

Approx. Toe of Fill Slope

F-2.8' El. 51.3'

NOTES:

Elev. Graded Ground At Loc. Stake = 4954.1'

SHENANDOAH ENERGY, INC.





FIGURE #2

TYPICAL CROSS SECTIONS FOR

OU GB #11W-10-8-22
SECTION 10, T8S, R22E, S.L.B.&M.
1949' FSL 1907' FWL

X-Section Scale
1" = 20'
1" = 50'

DATE: 06-19-02
Drawn By: D.COX

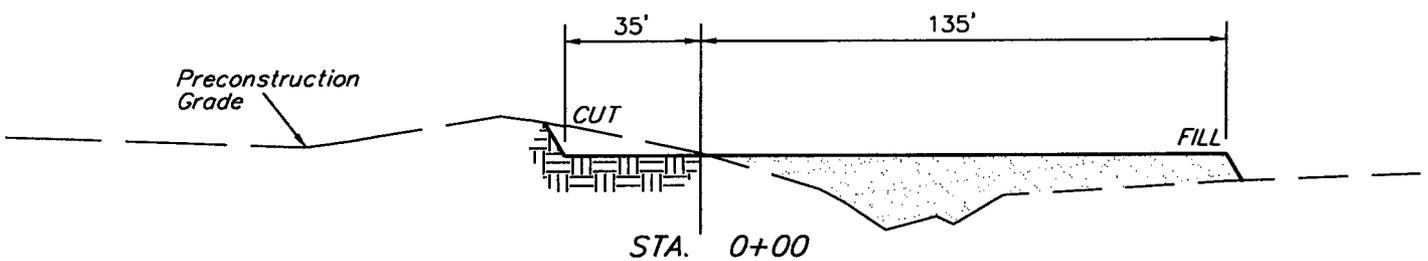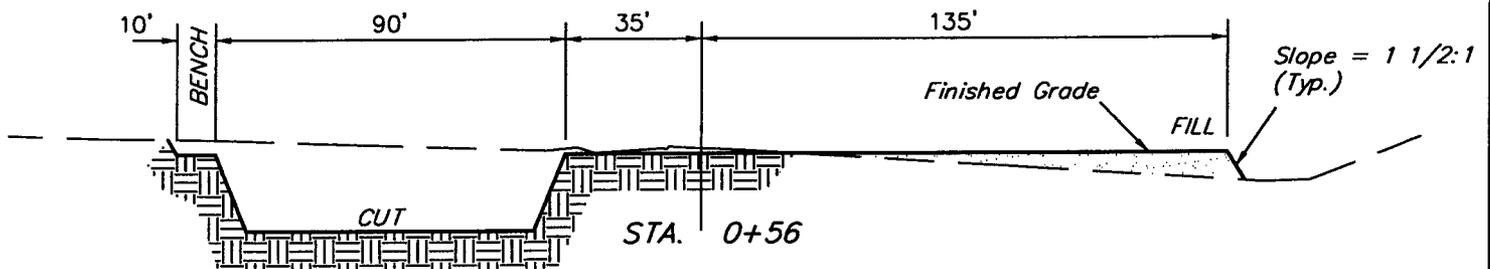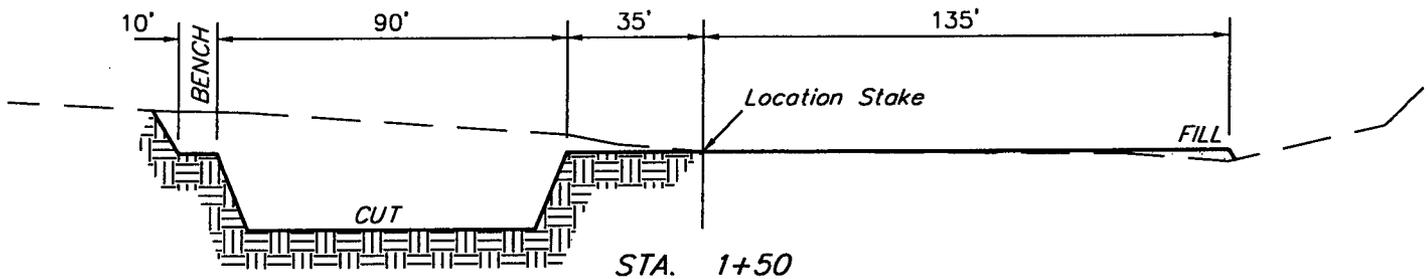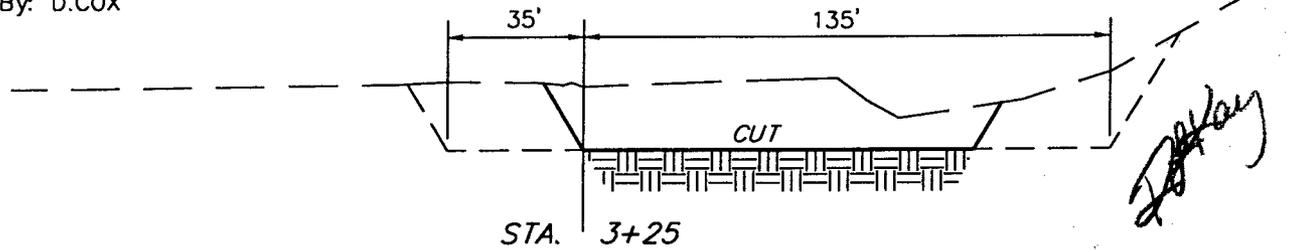

NOTE:

Topsoil should not be Stripped Below Finished Grade on Substructure Area.

EXCESS MATERIAL AFTER 5% COMPACTION = 4,510 Cu. Yds.

Pit Backfill (1/2 Pit Vol.) = 1,160 Cu. Yds.


EXCESS UNBALANCE (After Rehabilitation) = 3,350 Cu. Yds.

APPROXIMATE YARDAGES

TOTAL CUT = 5,710 CU.YDS.

FILL = 1,140 CU.YDS.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

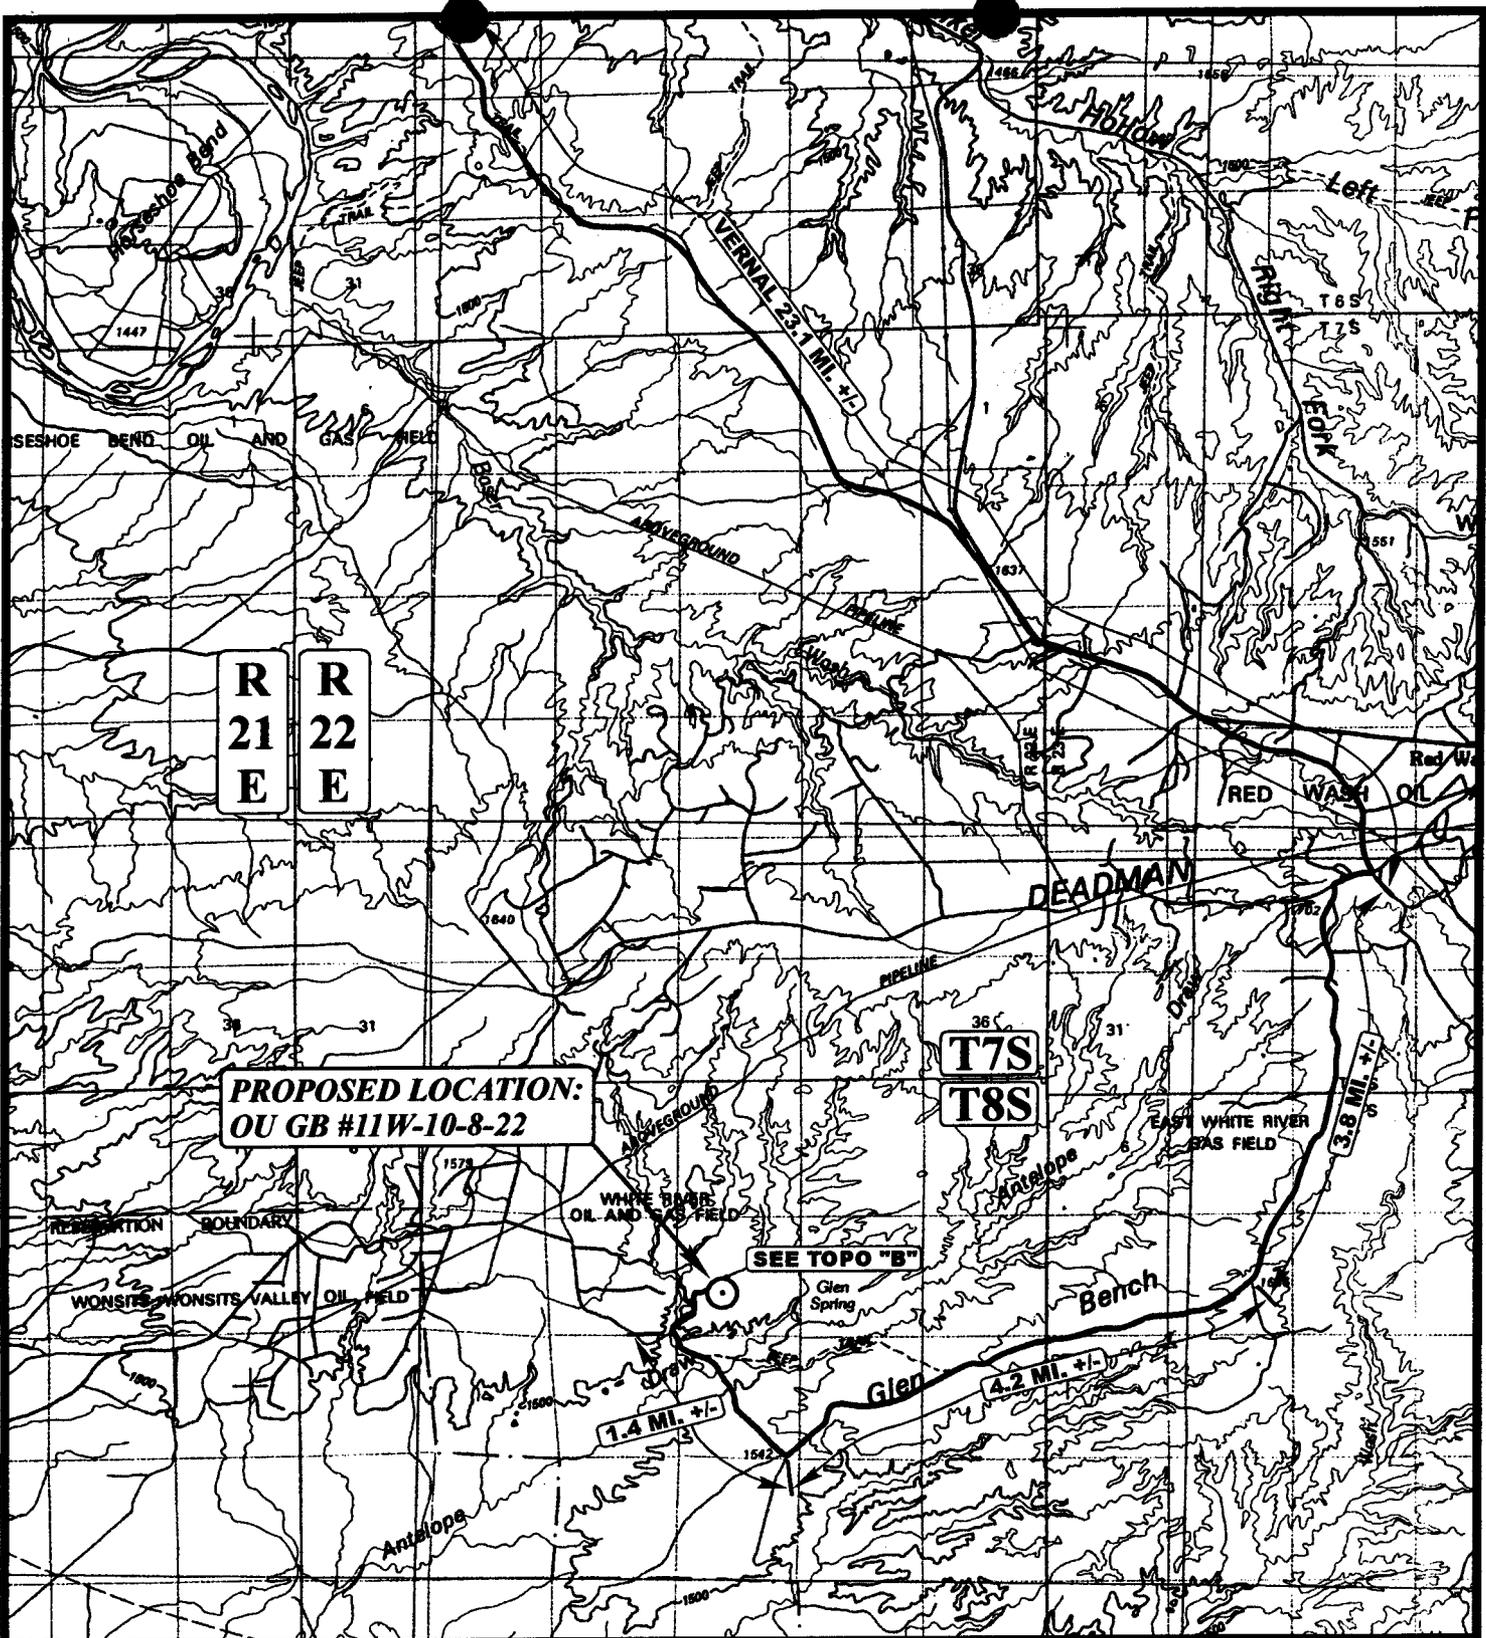

**PROPOSED LOCATION:
OU GB #11W-10-8-22**

**T7S
T8S**

**R
21
E
R
22
E**

SEE TOPO "B"

1.4 MI. +/-

4.2 MI. +/-

3.8 MI. +/-

LEGEND:

○ PROPOSED LOCATION

SHENANDOAH ENERGY, INC.

**OU GB #11W-10-8-22
SECTION 10, T8S, R22E, S.L.B.&M.
1949' FSL 1907' FWL**



Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813




**TOPOGRAPHIC
MAP**

6	18	02
MONTH	DAY	YEAR

SCALE: 1:100,000 DRAWN BY: P.M. REVISED: 00-00-00



R
22
E

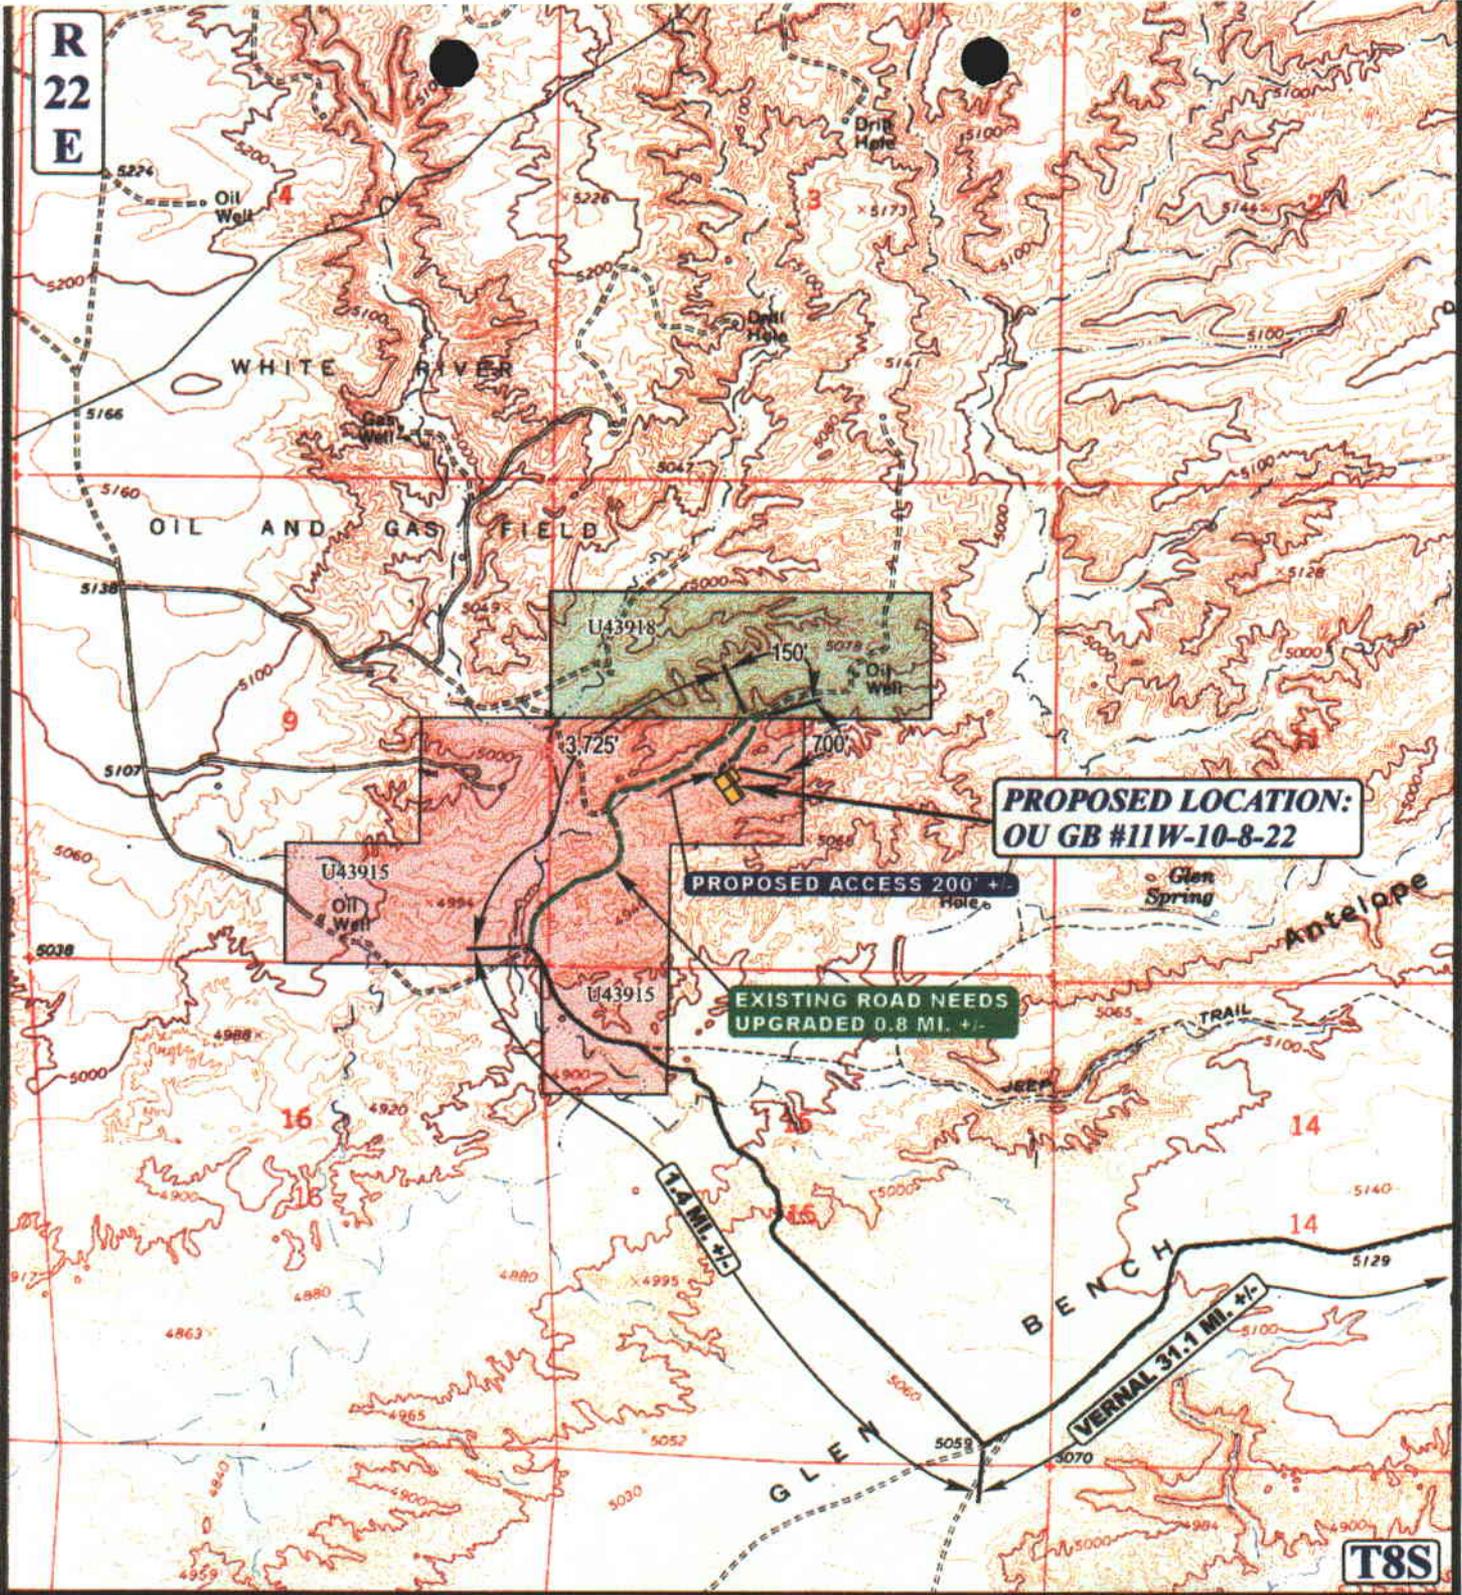

**PROPOSED LOCATION:
OU GB #11W-10-8-22**

PROPOSED ACCESS 200' +/-

EXISTING ROAD NEEDS UPGRADED 0.8 MI. +/-

LEGEND:

-  EXISTING ROAD
-  PROPOSED ACCESS ROAD
-  EXISTING ROAD NEEDS UPGRADED

SHENANDOAH ENERGY, INC.

**OU GB #11W-10-8-22
SECTION 10, T8S, R22E, S.L.B.&M.
1949' FSL 1907' FWL**



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813


**TOPOGRAPHIC
MAP**

6 18 02
MONTH DAY YEAR

SCALE: 1" = 2000'

DRAWN BY: P.M. REVISED: 7-29-02



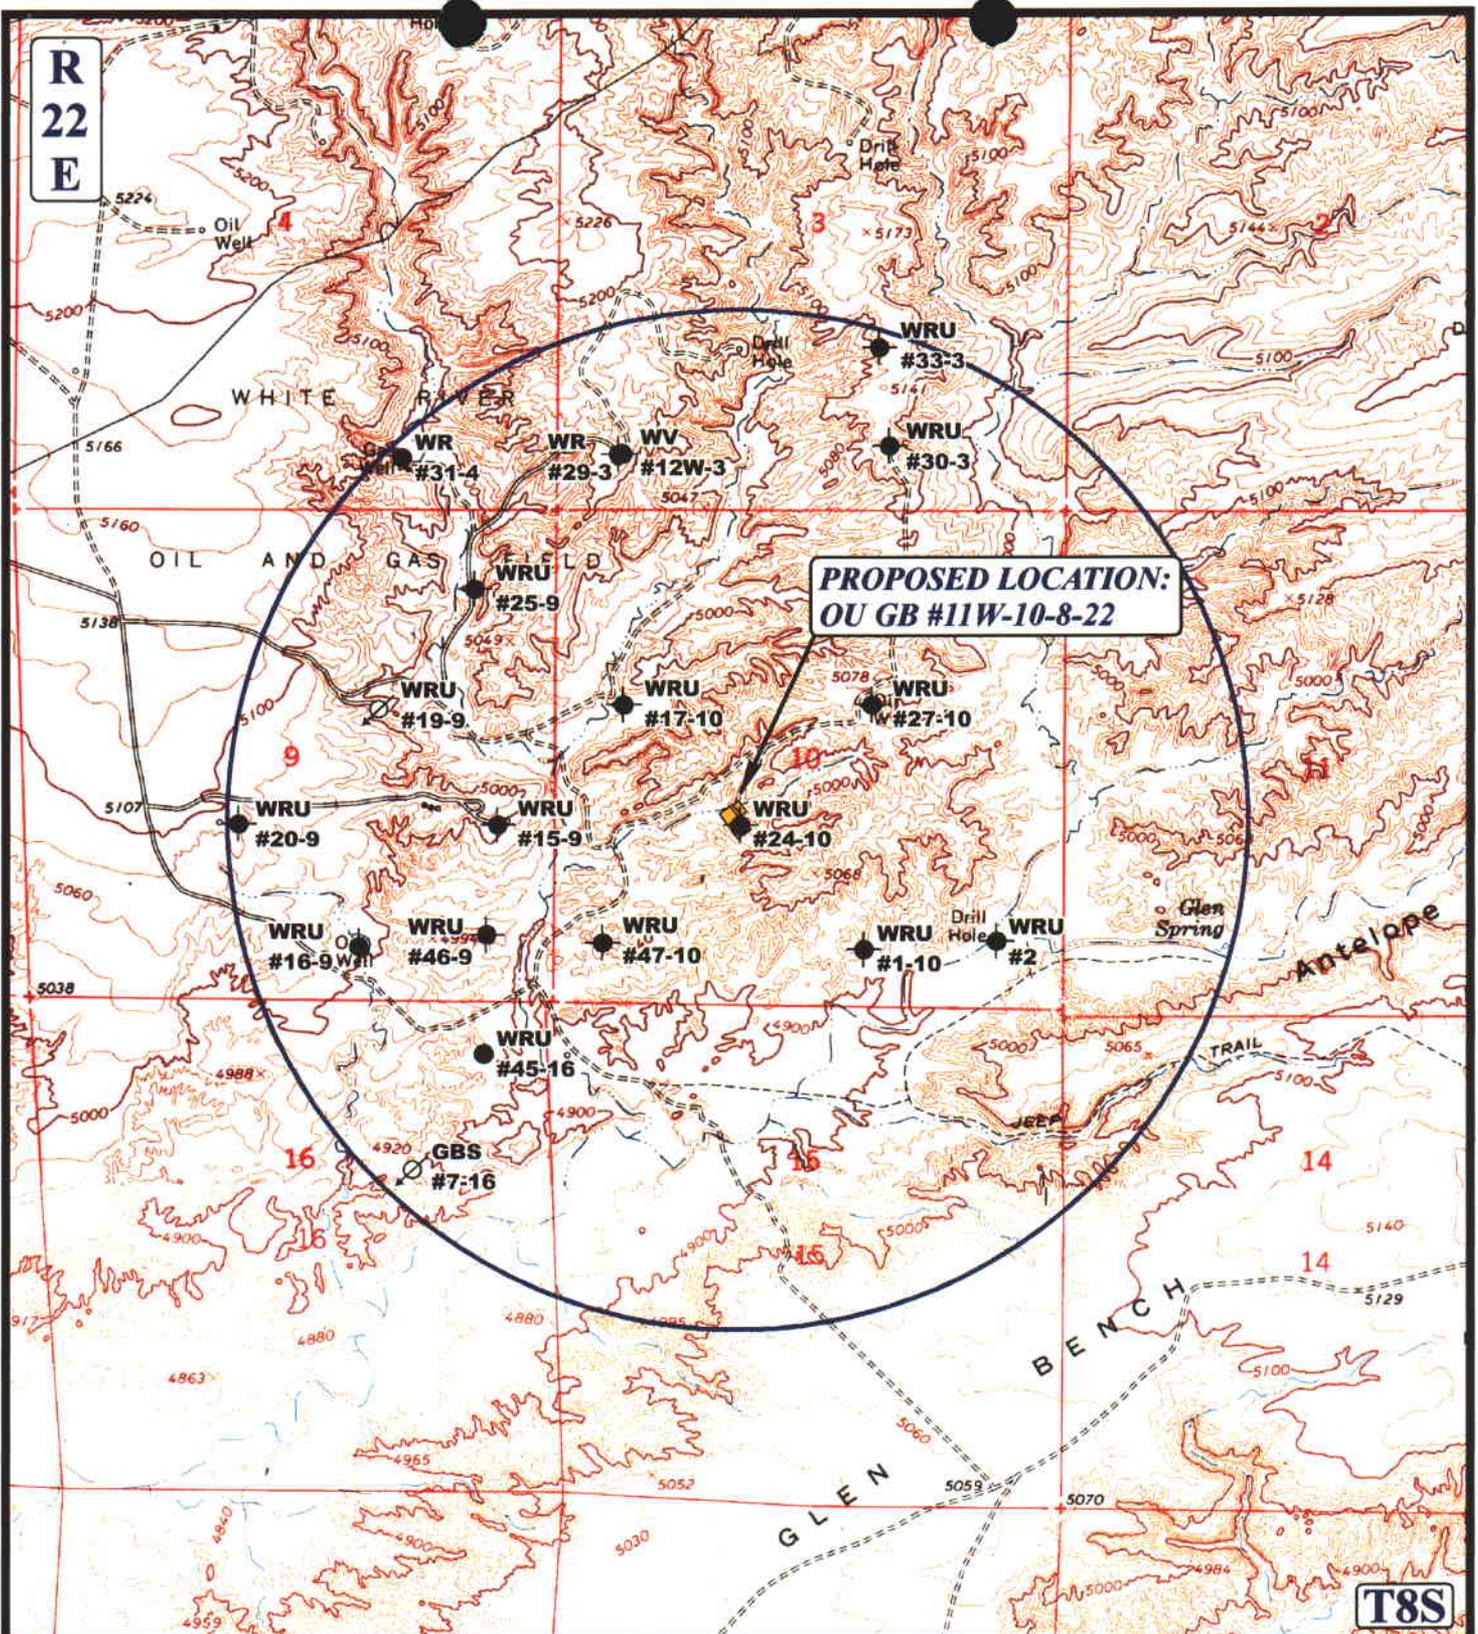

**R
22
E**

**PROPOSED LOCATION:
OU GB #11W-10-8-22**

T8S

LEGEND:

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ⊗ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED



SHENANDOAH ENERGY, INC.

**OU GB #11W-10-8-22
SECTION 10, T8S, R22E, S.L.B.&M.
1949' FSL 1907' FWL**




Utintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

6 18 02
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: P.M. REVISED: 00-00-00



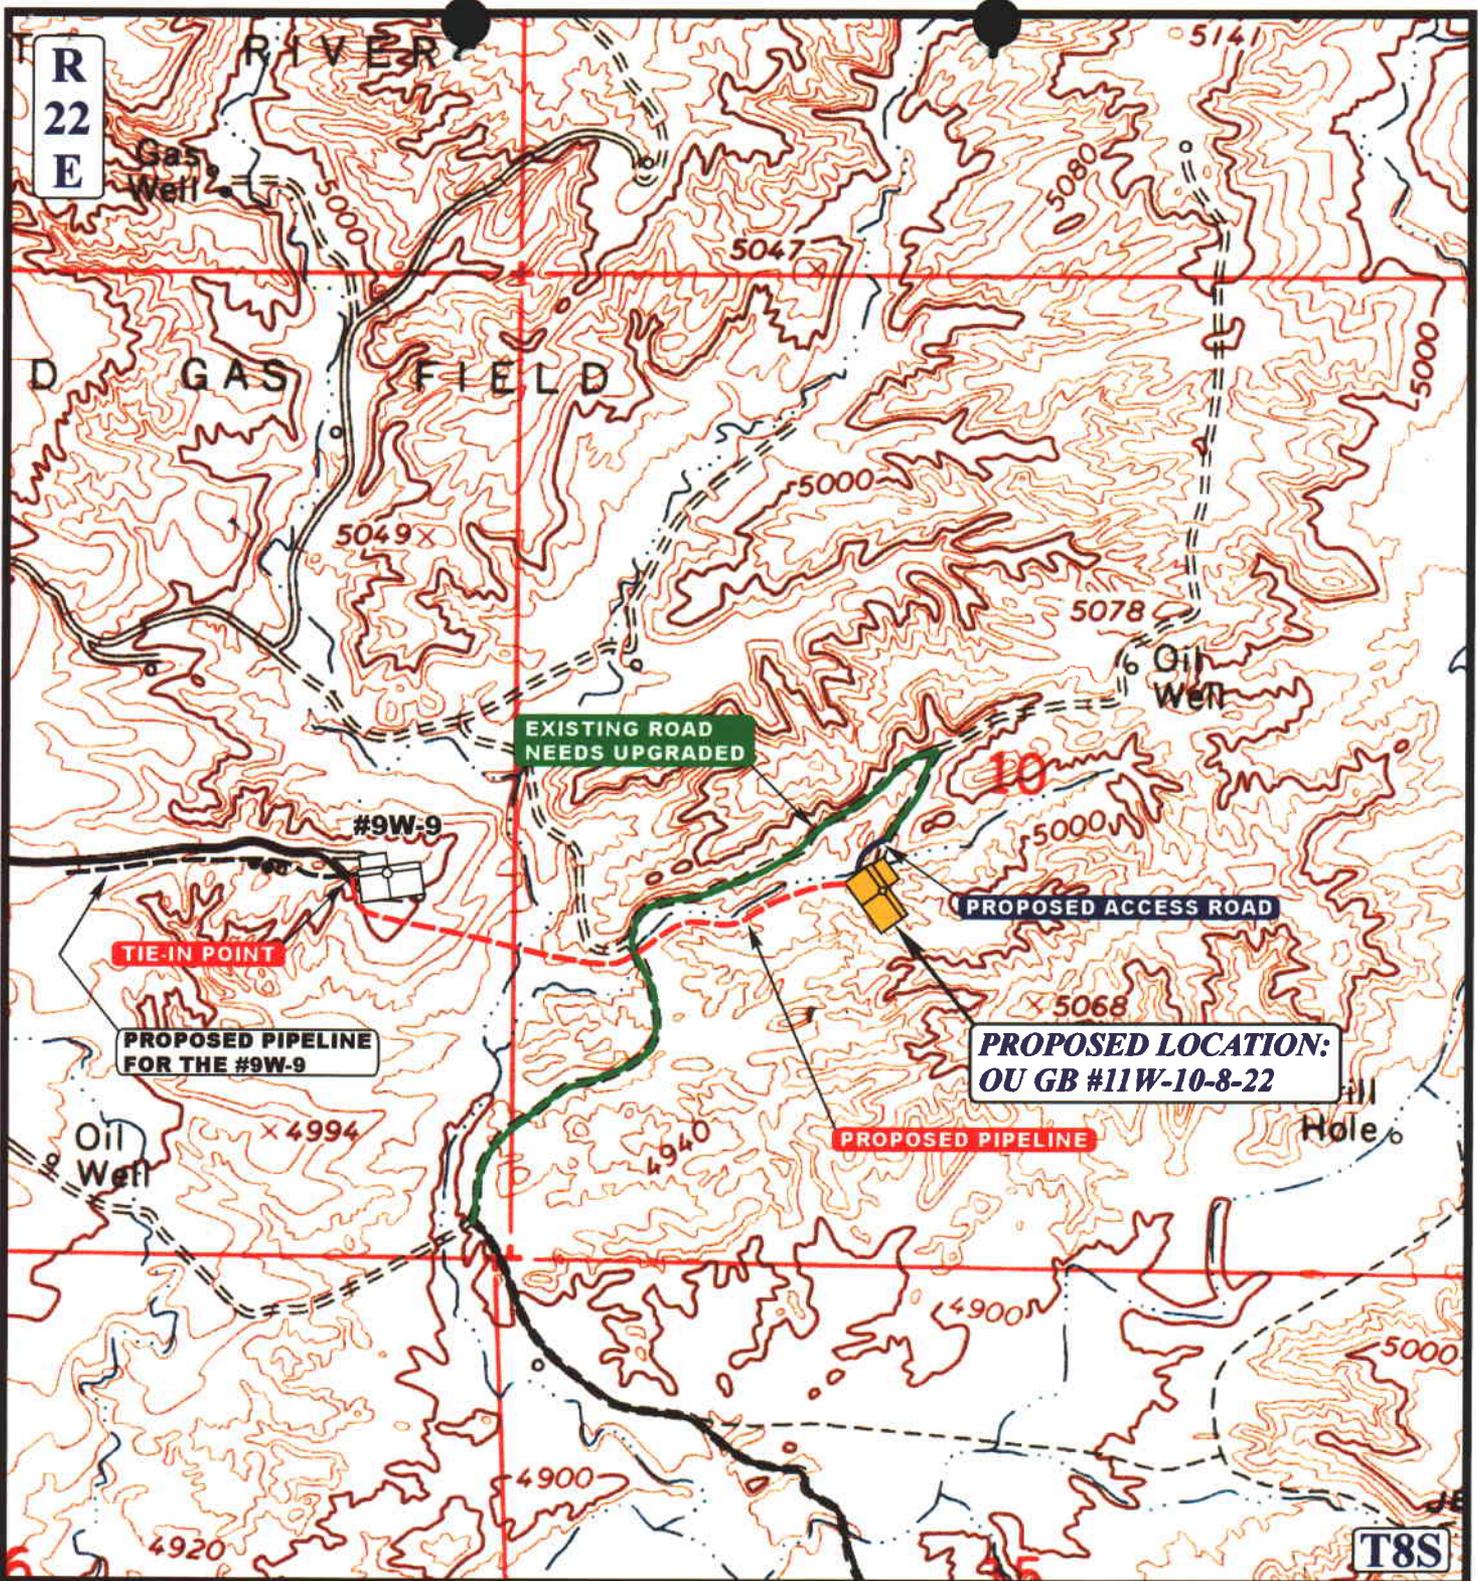

APPROXIMATE TOTAL PIPELINE DISTANCE = 2,850' +/-

LEGEND:

-  EXISTING ROAD
-  PROPOSED ACCESS ROAD
-  EXISTING PIPELINE
-  PROPOSED PIPELINE

SHENANDOAH ENERGY, INC.

OU GB #11W-10-8-22
SECTION 10, T8S, R22E, S.L.B.&M.
1949' FSL 1907' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC
MAP

6	18	02
MONTH	DAY	YEAR

SCALE: 1" = 1000' DRAWN BY: P.M. REVISED: 00-00-00

D
TOPO

SHENANDOAH ENERGY, INC.

OU GB #11W-10-8-22

LOCATED IN UINTAH COUNTY, UTAH
SECTION 10, T8S, R22E, S.L.B.&M.

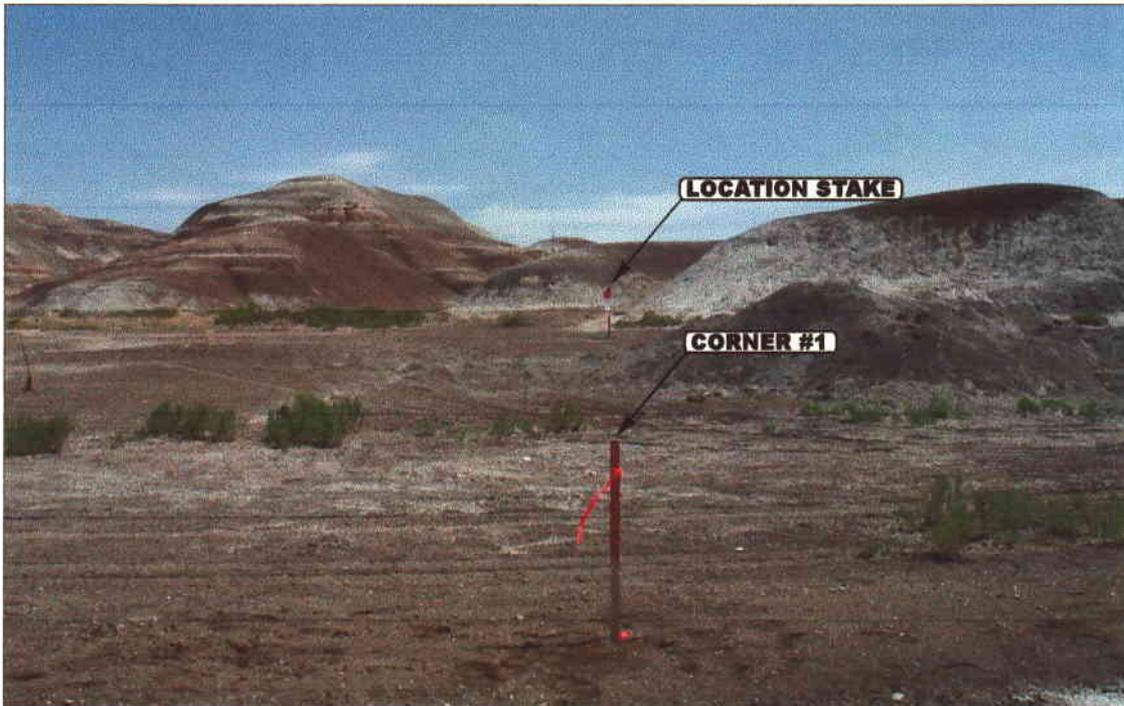


PHOTO: VIEW FROM CORNER #1 TO LOCATION STAKE

CAMERA ANGLE: NORTHEASTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: SOUTHWESTERLY



UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

- Since 1964 -

LOCATION PHOTOS	6	18	02	PHOTO
	MONTH	DAY	YEAR	
TAKEN BY: D.A.	DRAWN BY: P.M.	REVISED: 00-00-00		

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 08/05/2002

API NO. ASSIGNED: 43-047-34691

WELL NAME: OU GB 11W-10-8-22
OPERATOR: SHENANDOAH ENERGY INC (N4235)
CONTACT: JOHN BUSCH

PHONE NUMBER: 435-781-4341

PROPOSED LOCATION:
NESW 10 080S 220E
SURFACE: 1949 FSL 1907 FWL
BOTTOM: 1949 FSL 1907 FWL
UINTAH
WHITE RIVER (705)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
LEASE NUMBER: U-43915
SURFACE OWNER: 1 - Federal

LATITUDE: 40.13561
LONGITUDE: 109.42801

PROPOSED FORMATION: WSTC

RECEIVED AND/OR REVIEWED:


- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. U-0969)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 43-8496)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)

LOCATION AND SITING:

- R649-2-3.
- Unit WHITE RIVER
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: _____
Eff. Date: _____
Siting: _____
- R649-3-11. Directional Drill

COMMENTS: Sep, Separate file

STIPULATIONS: 1- Federal Approval
2- Spacing Strip

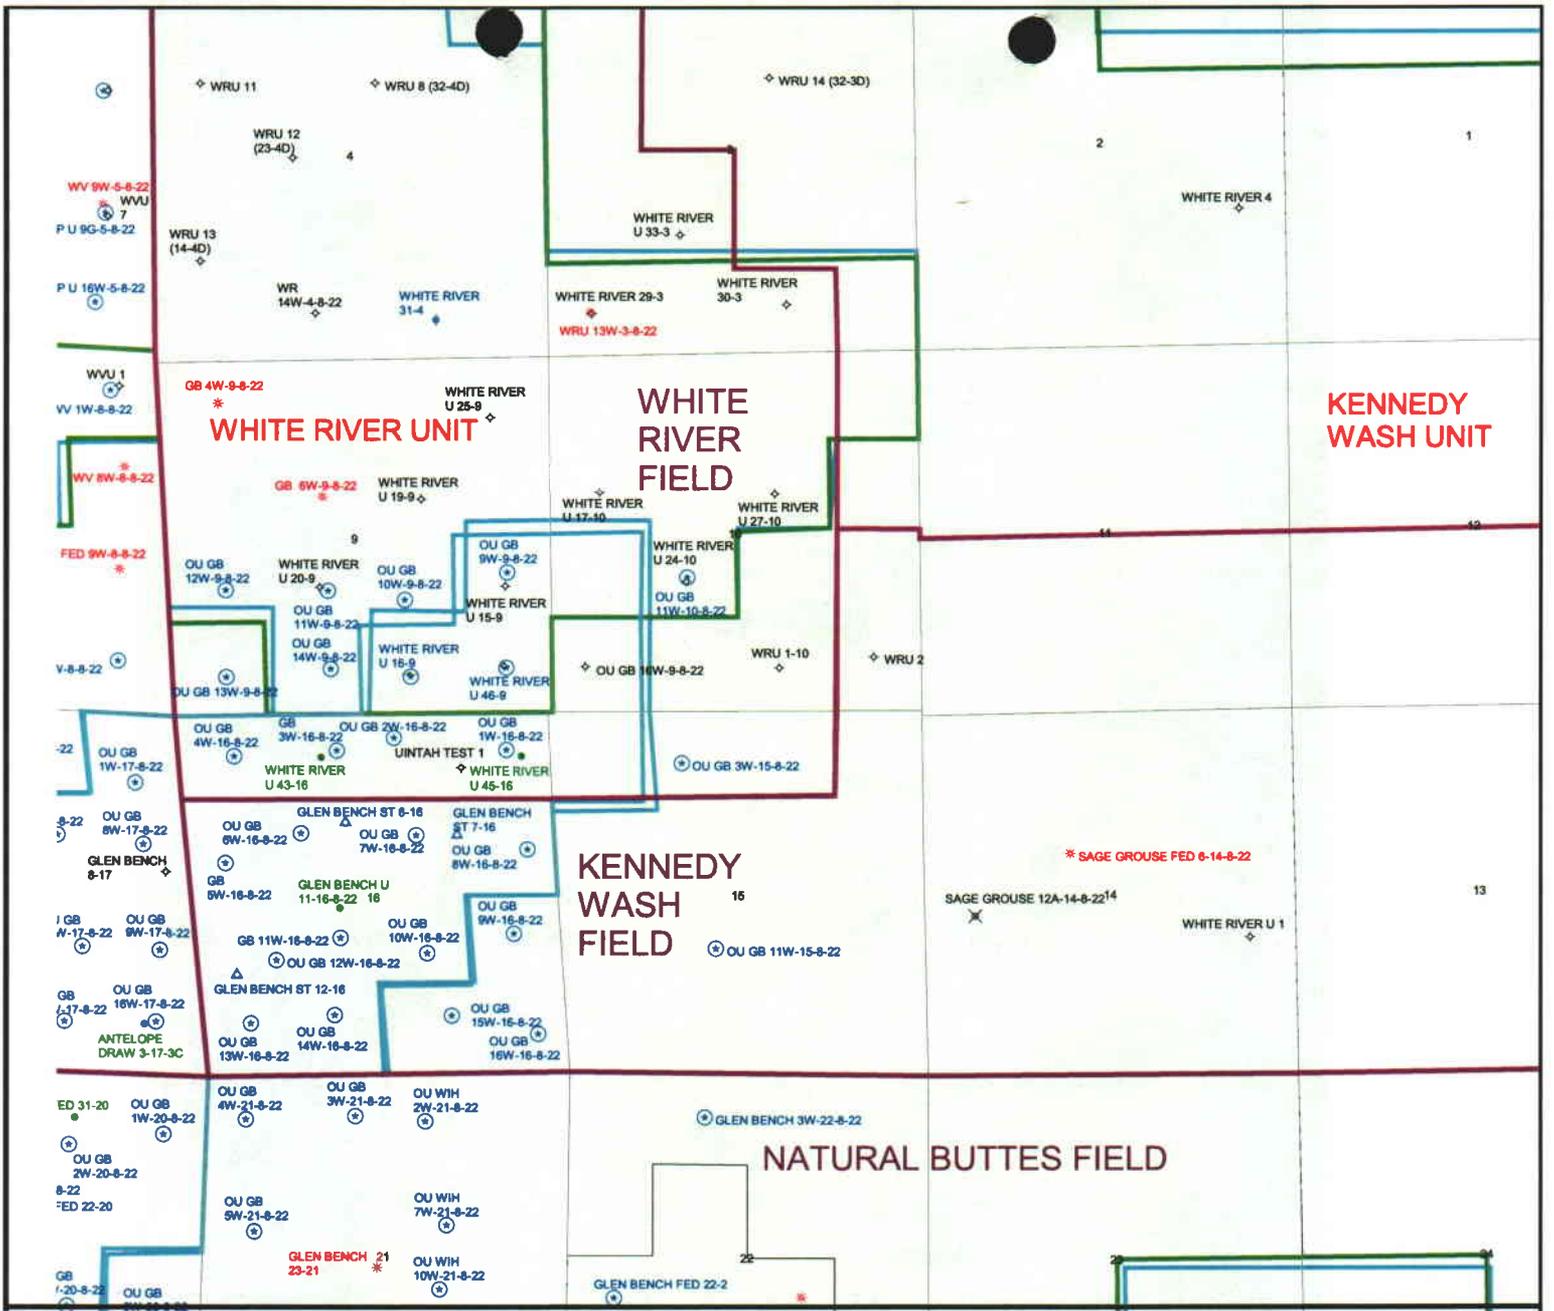


OPERATOR NAME: SHENANDOAH (N4235)

SEC: 10 T8S R22E

FIELD: WHITE RIVER (705)

COUNTY: UINTAH SPACING: R649-3-2 GEN ST

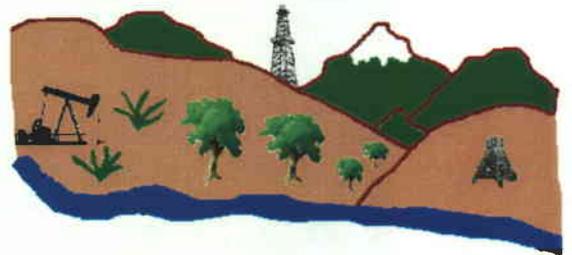

Field Status

- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED
- Township.shp
- Sections

Well Status

- Gas Injection
- Gas Storage
- Location Abandoned
- ⊙ Location
- Plugged
- Producing Gas
- Producing Oil
- Shut-In Gas
- Shut-In Oil
- Temporarily Abandoned
- Test Well
- ▲ Water Injection
- ▲ Water Supply
- ◆ Water Disposal

Unit Status

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

Utah Oil Gas and Mining



Prepared By: D. Mason
Date: 7-AUGUST-2002

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

August 8, 2002

Memorandum

To: Assistant District Manager Minerals, Vernal District
From: Michael Coulthard, Petroleum Engineer
Subject: 2002 Plan of Development White River Unit,
Uintah County, Utah.

Pursuant to email between Diana Mason, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management. The following wells are planned for calendar year 2002 within the White River Unit, Uintah County, Utah.

Api Number	Well	Location
------------	------	----------

(Proposed PZ Wasatch)

43-047-34691	OU GB 11W-10-8-22	Sec. 10 T. 8S R. 22E 1949 FSL 1907 FWL
43-047-34684	WRU EIH 6W-35-8-22	Sec. 35 T. 8S R. 22E 1980 FNL 1982 FWL

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard

bcc: File - White River Unit
Division of Oil Gas and Mining
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:8-8-2



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt
Governor
Kathleen Clarke
Executive Director
Lowell P. Braxton
Division Director

1594 West North Temple, Suite 1210
PO Box 145801
Salt Lake City, Utah 84114-5801
801-538-5340
801-359-3940 (Fax)
801-538-7223 (TDD)

August 8, 2002

Shenandoah Energy, Inc.
11002 E 17500 S
Vernal, UT 84078

Re: Over and Under Glen Bench 11W-10-8-22 Well, 1949' FSL, 1907' FWL, NE SW,
Sec. 10, T. 8 South, R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-34691.

Sincerely,

A handwritten signature in cursive script, appearing to read 'John R. Baza'.

Handwritten initials 'JB' in cursive script.

John R. Baza
Associate Director

pb

Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: Shenandoah Energy, Inc.
Well Name & Number Over and Under Glen Bench 11W-10-8-22
API Number: 43-047-34691
Lease: U-43915

Location: NE SW **Sec.** 10 **T.** 8 South **R.** 22 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

6. (R649-9-2)Waste Management Plan has been received on: IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: 7/21/2003

8. **Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 7/21/2003

9. **Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: n/a

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: n/a

DATA ENTRY:

- 1. Changes entered in the **Oil and Gas Database** on: 9/11/2003
- 2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 9/11/2003
- 3. Bond information entered in RBDMS on: n/a
- 4. Fee wells attached to bond in RBDMS on: n/a

STATE WELL(S) BOND VERIFICATION:

1. State well(s) covered by Bond Number: 965-003-032

FEDERAL WELL(S) BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: ESB000024

INDIAN WELL(S) BOND VERIFICATION:

1. Indian well(s) covered by Bond Number: 799446

FEE WELL(S) BOND VERIFICATION:

- 1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number 965-003-033
- 2. The **FORMER** operator has requested a release of liability from their bond on: n/a
The Division sent response by letter on: n/a

LEASE INTEREST OWNER NOTIFICATION:

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: n/a

COMMENTS:



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

IN REPLY REFER TO
UT-922

June 9, 2003

QEP Uinta Basin, Inc.
1050 17th Street, Suite 500
Denver, Colorado 80265

Re: White River Unit
Uintah County, Utah

Gentlemen:

On May 30, 2003, we received an indenture dated February 1, 2003, whereby Shenandoah Energy, Inc. changed its name and QEP Uinta Basin, Inc. was designated as Successor Unit Operator for the White River Unit, Uintah County, Utah.

This indenture was executed by all required parties and the signatory parties have complied with Sections 5 and 6 of the unit agreement. The instrument is hereby approved effective June 9, 2003. In approving this designation, the Authorized Officer neither warrants nor certifies that the designated party has obtained all required approval that would entitle it to conduct operations under White River Unit Agreement.

Your nationwide (Eastern States) oil and gas bond No. B000024 will be used to cover all operations within the White River Unit.

It is requested that you notify all interested parties of the name change of unit operator. Copies of the approved instruments are being distributed to the appropriate federal offices, with one copy returned herewith.

Sincerely,

/s/ Robert A. Henricks

Robert A. Henricks
Chief, Branch of Fluid Minerals

Enclosure

bcc: Field Manager - Vernal (w/enclosure)
SITLA
Division of Oil, Gas & Mining
Minerals Adjudication Group
File – White River Unit (w/enclosure)
Agr. Sec. Chron
Fluid Chron

UT922:TAThompson:tt:6/9/03

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

006

APPLICATION FOR PERMIT TO DRILL OR REENTER

5. Lease Serial No.
UTU74494

6. If Indian, Allottee or Tribe Name

7. If Unit or CA Agreement, Name and No.
UTU63021X

8. Lease Name and Well No.
OU GB 11W-10-8-22

9. API Well No.

10. Field and Pool, or Exploratory
WHITE RIVER

11. Sec., T., R., M., or Blk. and Survey or Area
Sec 10 T8S R22E Mer SLB

12. County or Parish
UINTAH

13. State
UT

17. Spacing Unit dedicated to this well
40.00

20. BLM/BIA Bond No. on file

23. Estimated duration
10 DAYS

1a. Type of Work: DRILL REENTER

1b. Type of Well: Oil Well Gas Well Other Single Zone Multiple Zone

2. Name of Operator
SHENANDOAH ENERGY INC

Contact: JOHN BUSCH
E-Mail: jbusch@shenandoahenergy.com

3a. Address
11002 EAST 17500 SOUTH
VERNAL, UT 84078-8526

3b. Phone No. (include area code)
Ph: 435.781.4341
Fx: 435.781.4323

4. Location of Well (Report location clearly and in accordance with any State requirements. *)
At surface NESW 1949FSL 1907FWL
At proposed prod. zone

RECEIVED
JUL 31 2002

14. Distance in miles and direction from nearest town or post office*
10 MILES SOUTHWEST OF REDWASH, UTAH

15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)
1907' +/-

16. No. of Acres in Lease
576.02

18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft.
25' +/-

19. Proposed Depth
7700 MD
7700 TVD

21. Elevations (Show whether DF, KB, RT, GL, etc.)
4968 KB

22. Approximate date work will start

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature (Electronic Submission) Name (Printed/Typed) JOHN BUSCH Date 07/31/2002

Title OPERATIONS

Approved by (Signature) Name (Printed/Typed) Office Date

Assistant Field Manager Mineral Resources JUL 14 2003 07/10/2003

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

DIV. OF OIL, GAS & MINING

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #12625 verified by the BLM Well Information System
For SHENANDOAH ENERGY INC, sent to the Vernal
Committed to AFMSS for processing by MARCIA KULESZA on 07/31/2002 (02MK0195AE)

NOTICE OF APPROVAL

** REVISED **

CONDITIONS OF APPROVAL ATTACHED

02PS0313AE NOS 07/05/02

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Shenandoah Energy Inc.

Well Name & Number: OU GB 11W-10-8-22

API Number: 43-047-34691

Lease Number: UTU - 74494

Location: NESW Sec. 10 TWN: 08S RNG: 22E

Agreement: WHITE RIVER UNIT

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

CONDITIONS OF APPROVAL
FOR THE SURFACE USE PROGRAM OF THE
APPLICATION FOR PERMIT TO DRILL

- A qualified paleontologist must be onsite during construction of the location to ensure that any paleontological resources are protected.
- The dirt contractor shall meet with Byron Tolman prior to beginning construction of the location.
- Corner 8 shall remain undisturbed as much as possible.
- A ROW shall be required for a portion of the upgraded access road that falls off lease.
- The berm o the south end of the location shall be extended around corner 6.
- An elevated 24-inch culvert shall be installed in the drainage where the access road enters the pad.
- The reserve pit shall be lined with a plastic liner. A felt liner would not be required unless blasting is necessary for construction of the reserve pit.
- 6 inches of topsoil should be stripped from the location and windrowed as shown on the cut sheet. The topsoil shall then be broadcast seeded with the recommended seed mix immediately after it has been windrowed and the seed walked into the soil with a dozer.
- The topsoil from the reserve pit should be stripped and piled separately near the reserve pit. When the reserve pit is closed, it shall be recontoured and the topsoil respread, and the area shall be seeded in the same manner as the location topsoil.
- Once the location is plugged and abandoned, it shall be recontoured to natural contours, topsoil respread where appropriate, and the entire location seeded with the recommended seed mix. Seeding could be done by broadcasting the seed and walking it in with a dozer. Seeding should take place immediately after the dirt work is completed.
- The seed mix for this location shall be:

Gardner saltbush	<i>Atriplex gardneri</i>	6 lbs./acre
Shadscale	<i>Atriplex confertifolia</i>	3 lbs./acre
Crested wheatgrass	<i>Agropyron cristatum</i>	3 lbs./acre
- All poundages are in pure live seed.
- Reseeding may be required if first seeding is not successful.

SEI (N4235) to QEP (N2460)

well_name	Sec	R	api DOGM	Entity		stat		unit_name		
OU GB 9W-9-8-22	09	080S	220E	4304734650		Federal	GW	APD	C	WHITE RIVER
OU GB 10W-9-8-22	09	080S	220E	4304734651	13730	Federal	GW	P	C	WHITE RIVER
OU GB 12W-9-8-22	09	080S	220E	4304734652	13712	Federal	GW	TA	C	WHITE RIVER
OU GB 11W-9-8-22	09	080S	220E	4304734653		Federal	GW	APD	C	WHITE RIVER
OU GB 16W-9-8-22	09	080S	220E	4304734679	13729	Federal	GW	P	C	WHITE RIVER
WRU EIH 6W-35-8-22	35	080S	220E	4304734684	13544	Federal	GW	DRL	C	WHITE RIVER
OU GB 11W-10-8-22	10	080S	220E	4304734691		Federal	GW	APD	C	WHITE RIVER
OU GB 13W-4-8-22	04	080S	220E	4304734752		Federal	GW	APD	C	WHITE RIVER
OU GB 5W-9-8-22	09	080S	220E	4304734753		Federal	GW	APD	C	WHITE RIVER
OU GB 11W-4-8-22	04	080S	220E	4304734761		Federal	GW	APD	C	WHITE RIVER
OU GB 3W-9-8-22	09	080S	220E	4304734763		Federal	GW	APD	C	WHITE RIVER
OU GB 12W-10-8-22	10	080S	220E	4304734769	13864	Federal	GW	DRL	C	WHITE RIVER
OU GB 3W-4-8-22	04	080S	220E	4304734806		Federal	GW	APD	C	WHITE RIVER
OU GB 4W-4-8-22	04	080S	220E	4304734807		Federal	GW	APD	C	WHITE RIVER
OU GB 5W-4-8-22	04	080S	220E	4304734808		Federal	GW	APD	C	WHITE RIVER
OU GB 6W-4-8-22	04	080S	220E	4304734809		Federal	GW	APD	C	WHITE RIVER
WRU EIH 14W-26-8-22	26	080S	220E	4304734835	12528	Federal	GW	DRL	C	WHITE RIVER
WRU EIH 11W-26-8-22	26	080S	220E	4304734836		Federal	GW	APD	C	WHITE RIVER

Form 3160-5
(June 1990)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

007

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or reentry to a different reservoir
Use "APPLICATION FOR PERMIT--" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
 Oil Well Gas Well Other Well

2. Name of Operator
QEP UINTA BASIN, INC.

3. Address and Telephone No.
11002 E. 17500 S. VERNAL, UT 84078-8526 (435) 781-4341

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
1949' FSL, 1907' FWL, NESW, SECTION 10, T8S, R22E

5. Lease Designation and Serial No.
U-43915

6. If Indian, Allottee or Tribe Name
N/A

7. If Unit or CA, Agreement Designation
N/A

8. Well Name and No.
OU GB 11W-10-8-22

9. API Well No.
43-047-34691

10. Field and Pool, or Exploratory Area
WHITE RIVER

11. County or Parish, State
UINTAH, UTAH

12. CHECK APPROPRIATE BOX(6) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Abandonment
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input checked="" type="checkbox"/> Other <u>APD Extension</u>
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Dispose Water

(Note) Report results of multiple completion on Well Completion or Recompletion Report and Log form.

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work)
QEP Uinta Basin, Inc. hereby requests a one year extension from approval date on the OU GB 11W-10-8-22.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 11-03-03
By: [Signature]

COPY SENT TO OPERATOR
Date: 11-3-03
Witness: CHS

14. I hereby certify that the foregoing is true and correct.
Signed RALEEN SEARLE Title REGULATORY AFFAIRS ANALYST Date 10/29/03

(This space for Federal or State office use)
Approved by: _____ Title _____ Date _____
Conditions of approval, if any _____

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See instruction on Reverse Side

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-34691
Well Name: OU GB 11W-10-8-22
Location: NESW, SECTION 10, T8S, R22E
Company Permit Issued to: QEP UINTA BASIN, INC.
Date Original Permit Issued: 7/10/2003

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No


Signature

10-29-03
Date

Title: REGULATORY AFFAIRS ANALYST

Representing: QEP UINTA BASIN, INC.

RECEIVED
OCT 30 2003

DIV. OF OIL, GAS & MINING

009

State of Utah
Division of Oil, Gas and Mining

OPERATOR ACCT. No. N-2460

OPERATOR: **QEP Uinta Basin, Inc.**
ADDRESS: **11002 East 17500 South**
Vernal, Utah 84078-8526

(435)781-4300

ENTITY ACTION FORM - FORM 6

Action Code	Current Entity No.	New Entity No.	API Number	Well Name	QQ	SC	TP	RG	County	Spud Date	Effective Date
A	99999	13967	43-047-35091	OU SG 9W 11 8 22 M	NESE	11	8S	22E	Uintah	11/14/03	11/26/03 K
WELL 1 COMMENTS: <i>WSTC</i>											
WELL 2 COMMENTS:											
WELL 3 COMMENTS:											
WELL 4 COMMENTS:											
WELL 5 COMMENTS:											

ACTION CODES (See instructions on back of form)

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)



NOTE: Use COMMENT section to explain why each Action Code was selected

(3/89)

John F Caldwell
Signature

Clerk Specialist 11/19/03
Title Date

Phone No. **(435) 781-4342**

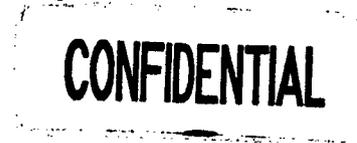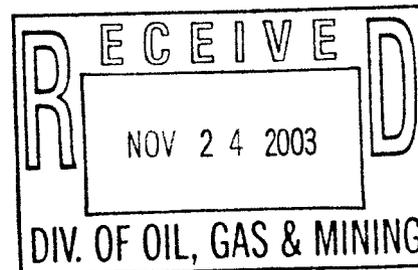

008

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: U-43915
2. NAME OF OPERATOR: QEP Uinta Basin, Inc.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
3. ADDRESS OF OPERATOR: 11002 E 17500 S CITY Vernal STATE UT ZIP 84078		7. UNIT or CA AGREEMENT NAME: N/A
PHONE NUMBER: (435) 781-4341		8. WELL NAME and NUMBER: OUGB 11W-10-8-22
10. FIELD AND POOL, OR WILDCAT: WHITE RIVER		9. API NUMBER: 4304734691

4. LOCATION OF WELL

FOOTAGES AT SURFACE: 1949' FSL 1907' FWL COUNTY: Uintah

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NESW 10 T8S 22E STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD Extension</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
QEP Uinta Basin, Inc. hereby requests a 1 year extension on the APD for the OUGB 11W-10-8-22.

**Approved by the
Utah Division of
Oil, Gas and Mining**
Date: 06-14-04
By: [Signature]

COPY SENT TO OPERATOR
DATE: 6-17-04
BY: CHD

NAME (PLEASE PRINT) John Busch TITLE Operations

SIGNATURE [Signature] DATE 6/7/2004

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-34691
Well Name: OUGB 11W-10-8-22
Location: 1949' FSL 1907' FWL NESW SEC 10 T8S R22E
Company Permit Issued to: QEP UINTA BASIN, INC.
Date Original Permit Issued: 8/8/2002

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

John Busch
Signature

6/7/2004
Date

Title: OPERATIONS

Representing: QEP UINTA BASIN, INC.

RECEIVED
MAY 08 2004
DIVISION OF OIL AND GAS

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

009

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir
Use "APPLICATION FOR PERMIT—" for such proposals

5. Lease Designation and Serial No.
U-43915
74494

6. If Indian, Allottee or Tribe Name
N/A

7. If Unit or CA, Agreement Designation
N/A
White River

8. Well Name and No.
OUGB 11W-10-8-22

9. API Well No.
43-047-34691

10. Field and Pool, or Exploratory Area
WHITE RIVER

11. County or Parish, State
UINTAH, UTAH

SUBMIT IN TRIPLICATE

1. Type of Well
Oil Gas
Well Well Other

2. Name of Operator
QEP UINTA BASIN, INC.
Contact: John Busch
Email: john.busch@questar.com

3. Address and Telephone No
11002 E. 17500 S. VERNAL, UT 84078-8526
(435) 781-4341

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
1949' FSL 1907' FWL NESW SEC 10 T8S R22E


12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Abandonment
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input checked="" type="checkbox"/> Other <u>APD Extension</u>
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Dispose Water

(Note) Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work)

QEP Uinta Basin, Inc. hereby requests a 1 year extension on the APD for the OUGB 11W-10-8-22.

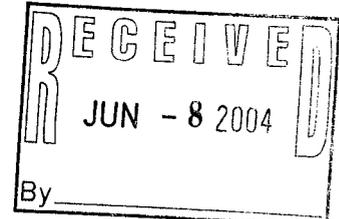

CONDITIONS OF APPROVAL ATTACHED

RECEIVED
JUL 27 2004

14. I hereby certify that the foregoing is true and correct.
Signed John Busch Title OPERATIONS Date 6/7/2004

(This space for Federal or State office use)
Approved by Kirk Fulwood Title Petroleum Engineer Date 7/23/04
Conditions of approval, if any

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UDOCM

QEP- Uintah Basin Inc.
APD Extension

Well: OUGB 11W-10-8-22

Location: NESW Sec. 10, T8S, R22E

Lease: U-43915

CONDITIONS OF APPROVAL

An extension for the referenced APD is granted with the following conditions:

1. The extension will expire 7/10/05
2. No other extensions beyond that time frame will be granted or allowed.

If you have any other questions concerning this matter, please contact Kirk Fleetwood of this office at (435) 781-4486

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

5. Lease Designation and Serial No.
U-43915

6. If Indian, Allottee or Tribe Name
N/A

7. If Unit or CA, Agreement Designation

8. Well Name and No.
OU GB 11W 10 8 22

9. API Well No.
43-047-34691

10. Field and Pool, or Exploratory Area
WHITE RIVER

11. County or Parish, State
UINTAH COUNTY, UTAH

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or reentry to a different reservoir
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
Oil Gas
 Well Well Other

2. Name of Operator
QEP, UINTA BASIN, INC.

3. Address and Telephone No. Contact: **dahn.caldwell@questar.com**
11002 E. 17500 S. VERNAL, UT 84078-8526 **435-781-4342 Fax 435-781-4357**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
NESW, SEC 10-T8S-R22E, 1949' FSL, 1907' FWL

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Abandonment
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input checked="" type="checkbox"/> Other SPUD
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Dispose Water

(Note) Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work)

On 6/12/05 Spud OU GB 11W 10 8 22 @ 8:00 AM. Drilled 40' of 20" conductor hole. Ran 1 jt 40' of 14" conductor pipe. Cement w/ Ready Mix.

RECEIVED
JUN 20 2005
BY OF OIL, GAS & MINING

3 - BLM, 2- Utah OG&M, 1 - Denver, 1 - file Word file-server

14. I hereby certify that the foregoing is true and correct.
Signed **Dahn F. Caldwell** *Dahn F. Caldwell* **Office Administrator II** Date **6/16/2005**

(This space for Federal or State office use)

Approved by: _____ Title _____ Date _____

Conditions of approval, if any _____

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

CONFIDENTIAL

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: QEP Uinta Basin, Inc. Operator Account Number: N 2460
 Address: 11002 East 17500 South
city Vernal
state UT zip 84078 Phone Number: (435) 781-4342

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304734691	OU GB 11W 10 8 22		NESW	10	8	22	Uintah
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
A	99999	14818	6/12/2005		7-6-05		
Comments: <u>WSTC</u>							CONFIDENTIAL

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
Comments: 							


Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
Comments: 							

RECEIVED
JUN 20 2005

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

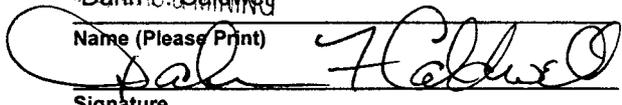Dawn E. Caldwell
 Name (Please Print)

 Signature
 Office Administrator II
 Title Date 6/16/2005

CONFIDENTIAL

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
Oil Gas
Well Well Other

2. Name of Operator
QEP, UINTA BASIN, INC.

3. Address and Telephone No. **11002 E. 17500 S. VERNAL, UT 84078-8526**
Contact: **Dahn.Caldwell@questar.com**
435-781-4342 Fax 435-781-4357

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
NESW, 1949' FSL, 1907' FWL, SEC 10-T8S-R22E

5. Lease Designation and Serial No.
U-43915

6. If Indian, Allottee or Tribe Name
N/A

7. If Unit or CA, Agreement Designation
N/A

8. Well Name and No.
GB 11ML 10 8 22

9. API Well No.
43-047-34691

10. Field and Pool, or Exploratory Area
WHITE RIVER

11. County or Parish, State
UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Abandonment
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input checked="" type="checkbox"/> Other <u>SPUD</u>
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Dispose Water

(Note) Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work)

On 6/11/06 - Drilled 35' of 20" conductor hole. Set 35' of 14" conductor. Cement w/ Ready Mix.

Drilled 12-1/4" hole. Run 11 jts 9-5/8" J-55 36# csg to 475'. Cmt w/ 200 sxs cmt.

**RECEIVED
JUN 23 2006**

DIV. OF OIL, GAS & MINING

3 - BLM, 2- Utah OG&M, 1 - Denver, 1 - file Word file-server

14. I hereby certify that the foregoing is true and correct.
Signed Dahn F. Caldwell Title Office Administrator II Date 6/20/06

(This space for Federal or State office use)

Approved by: _____ Title _____ Date _____
Conditions of approval, if any _____

CONFIDENTIAL

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

DRILLING PROGRAM

ONSHORE OIL & GAS ORDER NO. 1
Approval of Operations on Onshore
Federal Oil and Gas Leases

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas No. 1, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

1. **Formation Tops**

The estimated tops of important geologic markers are as follows:

<u>Formation</u>	<u>Depth, TVD</u>
Uinta	Surface
Green River	3,051'
Mahogany	3,631'
Wasatch	6,111'
Mesaverde	8,636'
Sego	11,198'
TD	11,325'

2. **Anticipated Depths of Oil Gas Water and Other Mineral Bearing Zones**

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

<u>Substance</u>	<u>Formation</u>	<u>Depth, TVD</u>
Gas	Wasatch	6,111'
Gas	Mesaverde	8,636'

All fresh water and prospectively valuable minerals encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

All water shows and water-bearing sands will be reported to the BLM in Vernal, Utah. Copies of State of Utah form OGC-8-X are acceptable. If flows are detected, samples will be submitted to the BLM along with any water analyses conducted. Fresh water will be obtained from Wonsits Valley water right # A36125 (which was filed on May 7, 1964,) or Red Wash water right # 49-2153 (which was filed on March 25, 1960). It was determined by the Fish and Wildlife Service that any water right number filed before 1989 is not depleting to the Upper Colorado River System, to supply fresh water for drilling purposes.

DRILLING PROGRAM

All water resulting from drilling operations will be disposed of at Red Wash Central Battery Disposal Site; SWSE, Section 27, T7S, R23E or Wonsits Valley Disposal Site; SWNW, Section 12, T8S, R21E.

3. **Operator's Specification for Pressure Control Equipment:**

- A. 5,000 psi W.P. Double Gate BOP, 5,000 psi annular (schematic attached)
- B. Functional test daily
- C. All casing strings shall be pressure tested (0.22 psi/foot or 1500 psi, whichever is greater) prior to drilling the plug after cementing; test pressure shall not exceed the internal yield pressure of the casing.
- D. Ram type preventers and associated equipment shall be tested to approved stack working pressure if isolated by test plug or to 50 percent of internal yield pressure of casing whichever is less. BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc..., for a 5M system and individual components shall be operable as designed.

4. **Casing Program**

Hole Size	Csg. Size	Top (MD)	Bottom (MD)	Wt.	Grade	Thread	Cond.
20"	14"	sfc	40'	Steel	Cond.	None	Used
12-1/4"	9-5/8"	sfc	450'	36.0	J-55	STC	New
8-3/4"	7"	sfc	4,500'	26.0	J-55	LTC	New
6-1/8"	4-1/2"	sfc	11,325'	11.6	P-110	LTC	New

Casing Strengths:				Collapse	Burst	Tensile (minimum)
9-5/8"	36.0 lb.	J-55	STC	2,020 psi	3,520 psi	394,000 lb.
7"	26.0 lb.	J-55	LTC	4,320 psi	4,980 psi	367,000 lb.
4-1/2"	11.6 lb.	P-110	LTC	7,580 psi	10,690 psi	279,000 lb.

DRILLING PROGRAM

5. Auxiliary Equipment

- A. Kelly Cock – yes
- B. Float at the bit – no
- C. Monitoring equipment on the mud system – visually and/or PVT/Flow Show
- D. Full opening safety valve on the rig floor – yes
- E. Rotating Head – yes
- F. If drilling with air the following will be used:
- G. The blooie line shall be at least 6” in diameter and extend at least 100’ from the well bore into the reserve/blooie pit.
- H. Blooie line ignition shall be provided by a continuous pilot (ignited when drilling below 500’).
- I. Compressor shall be tied directly to the blooie line through a manifold.
- J. A mister with a continuous stream of water shall be installed near the end of the blooie lines for dust suppression.

Surface hole will be drilled with air, air/mist, foam, or mud depending on hole conditions. Drilling below surface casing will be with water based drilling fluids consisting primarily of fresh water, bentonite, lignite, caustic, lime, soda ash and polymers. No chromates will be used. It is not intended to use oil in the mud, however, in the event it is used, oil concentration will be less than 4% by volume. Maximum anticipated mud weight is 10.5 ppg.

No minimum quantity of weight material will be required to be kept on location.

PVT/Flow Show will be used from base of surface casing to TD.

Gas detector will be used from surface casing depth to TD.

DRILLING PROGRAM

6. **Testing, logging and coring program**

- A. Cores – none anticipated
- B. DST – none anticipated
- C. Logging – Mud Logging – 1500' to TD
GR-SP-Induction
Neutron Density
- D. Formation and Completion Interval: Green River/Wasatch/Mesaverde interval, final determination of completion will be made by analysis of logs.
Stimulation: Stimulation will be designed for the particular area of interest as encountered.

7. **Cementing Program**

14" Conductor:

Cement to surface with construction cement.

9-5/8" Surface Casing: sfc - 450' (MD)

Lead/Tail Slurry: 0' – 450'. 240 sks (280 cu ft) Premium AG cement + 2% CaCl₂ + 0.25 lb/sk celloflake. Slurry wt: 15.8 ppg, Slurry yield: 1.17 ft³/sk, Slurry volume: 12-1/4" hole + 100% excess.

7" Intermediate Casing: sfc - 4,500' (MD)

Lead Slurry: 0' – 4,000'. 230 sks (890 cu ft) Halliburton Hi-Fill cement. Slurry wt: 11.0 ppg, Slurry yield: 3.86 ft³/sk, Slurry volume: 8-3/4" hole + 50% excess in open hole section.

Tail Slurry: 4,000' – 4,500'. 90 sks (110 cu ft) of 50/50 Poz Premium AG + 2.0% Bentonite + 0.6% Halad (R)-322 fluid loss + 2.0% Microbond M expander + 5% salt + 0.25 lb/sk Flocele. Slurry wt: 14.35 ppg, Slurry yield: 1.24 ft³/sk, Slurry volume: 8-3/4" hole + 50% excess.

4-1/2" Production Casing: sfc - 11,325' (MD)

Lead Slurry: 0' - 5,600'. 175 sks (675 cu ft) Halliburton Hi-Fill cement + 16% Bentonite + 0.75% Econolite + 3% salt + 0.8% HR-7 retarder. Slurry wt: 11.0 ppg, Slurry yield: 3.84 ft³/sk, Slurry volume: 6-1/8" hole + 25% excess in open hole section.

Tail Slurry: 5,600' – 11,325'. 870 sks (1080 cu ft) of 50/50 Poz Premium AG + 2.0% Bentonite + 0.6% Halad (R)-322 fluid loss + 2.0% Microbond M expander + 5% salt + 0.2% HR-5 retarder + 0.25 lb/sk Flocele. Slurry wt: 14.35 ppg, Slurry yield: 1.24 ft³/sk, Slurry volume: 6-1/8" hole + 25% excess.

ONSHORE OIL & GAS ORDER NO. 1
QEP Uinta Basin, Inc.
GB 11ML-10-8-22

DRILLING PROGRAM

*Final cement volumes to be calculated from caliper log with an attempt to be made to circulate cement to the surface. A bond log will be run across the zone of interest and across zones as required by the authorized officer to insure protection of natural resources.

8. **Anticipated Abnormal Pressures and Temperatures, Other Potential Hazards**

No abnormal temperatures or pressures are anticipated. No H₂S has been encountered in or known to exist from previous wells drilled to similar depths in the general area. Maximum anticipated bottom hole pressure equals approximately 6,185 psi. Maximum anticipated bottom hole temperature is 215° F.

EXHIBIT B
SCHEMATIC DIAGRAM OF 5,000 PSI BOP STACK

5M

13 5/8" Rotating Head

13 5/8" 5M Spacer Spool

13 5/8" 5M Annular

13 5/8" 5M Double Ram

2" Kill Line

3" Choke Line


G.L.

2" 5M Check Manual
2" 5M Manual
2" 5M Manual

3" 5M Manual
3" 5M HGR

13 5/8" 5M x 5M Multi-Bowl Head

13 3/8" 5M Casing Head

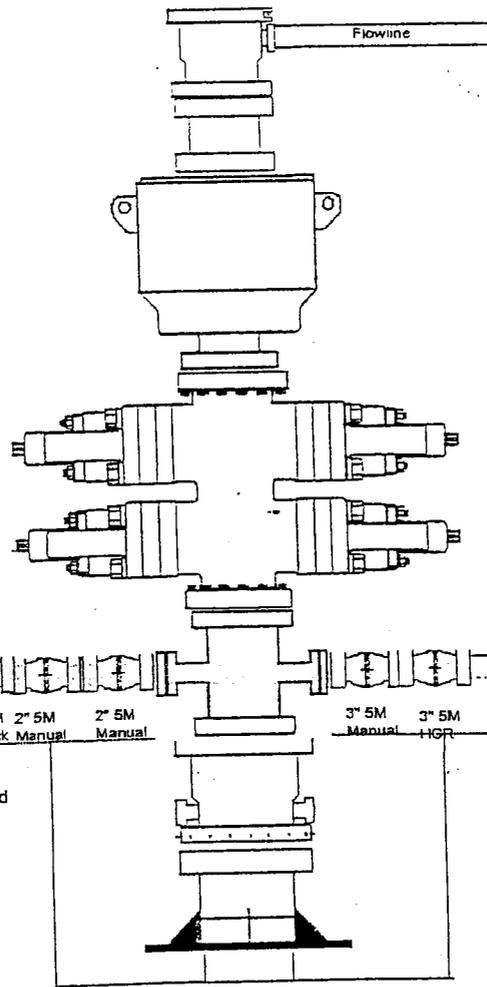

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

SUBMIT IN DUPLICATE

(See other instructions on reverse side).

Form approved.
Budget Bureau No. 1004-0137
Expires August 31, 1985

5. LEASE DESIGNATION AND SERIAL NO.
U-43915

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
N/A

WELL COMPLETION OR RECOMPLETION REPORT AND LOG *

1a. TYPE OF WELL
 OIL WELL GAS WELL DRY Other

b. TYPE OF COMPLETION
 NEW WELL WORK OVER DEEP-EN PLUG BACK DIFF. RESVR Other

7. UNIT AGREEMENT NAME
N/A

8. FARM OR LEASE NAME

2. NAME OF OPERATOR
QEP UINTA BASIN, INC.

9. WELL NO.
GB 11ML 10 8 22

3. ADDRESS OF OPERATOR
11002 E. 17500 S. VERNAL, UT 84078-8526 **435-781-4342**

10. FIELD AND POOL, OR WILDCAT
WHITE RIVER

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)*

At surface **NESW, 1949' FSL, 1907' FWL, SEC 10 T8S R22E**

At top rod. interval reported below **NESW, 1949' FSL, 1907' FWL, SEC 10 T8S R22E**

At total depth **NESW, 1949' FSL, 1907' FWL, SEC 10 T8S R22E**

11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA
SEC 10 T8S R22E

14. PERMIT NO. **43-047-34691** DATE ISSUED

12. COUNTY OR PARISH **UINTAH** 13. STATE **UT**

15. DATE SPUDDED **6/11/06** 16. DATE T.D. REACHED **7/10/06** 17. DATE COMPL. (Ready to prod.) **8/12/06** 18. ELEVATIONS (DF, RKB, RT, GR, ETC.)* **KB** 19. ELEV. CASINGHEAD

20. TOTAL DEPTH, MD & TVD **11,200'** 21. PLUG BACK T.D., MD & TVD **11,157'** 22. IF MULTIPLE COMPL., HOW MANY* 23. INTERVALS DRILLED BY **X** ROTARY TOOLS CABLE TOOLS

24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)*
SEE ATTACHMENT PAGE 1

25. WAS DIRECTIONAL SURVEY MADE
NO

26. TYPE ELECTRIC AND OTHER LOGS RUN
PLATFORM EXPR - TRIPLE COMBO, GR/CBL, COMP NEUTRON - 3 DETECTOR DENSITY

27. WAS WELL CORED
NO

28. CASING RECORD (Report all strings set in well)

CASING SIZE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
9-5/8"	36#	475'	12-1/4"	200 SXS	
7"	26#	4524'	8-3/4"	308 SXS	
4-1/2"	11.6#	11200'	7-7/8"	1244 SXS	

29. LINER RECORD 30. TUBING RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
					2-3/8"	10840'	

31. PERFORATION RECORD (Interval, size and number)
SEE ATTACHMENT PAGE 1

**RECEIVED
SEP 18 2006**

32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
SEE ATTACHMENT PAGE 1	

33.* **DIV OF OIL GAS & MINING** PRODUCTION

DATE FIRST PRODUCTION **8/12/06** PRODUCTION METHOD (Flowing, gas lift, pumping—size and type of pump) **FLOWING** WELL STATUS (Producing or shut-in) **PRODUCING**

DATE OF TEST	HOURS TESTED	CHOKE SIZE	PROD'N FOR TEST PERIOD	OIL—BBL.	GAS—MCF.	WATER—BBL.	GAS-OIL RATIO
8/14/06	24	23	→	73	735	356	

FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE	OIL—BBL.	GAS—MCF	WATER—BBL	OIL GRAVITY-API (CORR.)
568	1537	→				

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.) **SOLD** TEST WITNESSED BY

35. LIST OF ATTACHMENTS
PERFORATION DETAIL PAGE 1 & WELLBORE SCHEMATIC

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED **JIM SIMONTON** TITLE **COMPLETION SUPERVISOR** DATE **9/5/06**

(See Instructions and Spaces for Additional Data on Reverse Side)

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals; and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries):

FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.
Green River	3046'		
Mahogany	3626'		
Wasatch	6106'		
Mesa Verde	8631'		
Sego	11191'		
TD	11200'		

38. GEOLOGIC MARKERS
GB 11ML 10 8 22

NAME	TOP	
	MEAS. DEPTH	TRUE VERT. DEPTH
Green River	3046'	
Mahogany	3626'	
Wasatch	6106'	
Mesa Verde	8631'	
Sego	11191'	
TD	11200'	

CONFIDENTIAL

GB 11ML 10-8-22
Attachment Page 1
PERFORATION DETAIL:

Open Perfs	Stimulation					Perf Status
7001' - 7009' }	Frac w/	72,212	Lbs in	34,314	Gals	Open - Wasatch
7278' - 7284' }						Open - Wasatch
7394' - 7396' }						Open - Wasatch
8174' - 8177' }	Frac w/	31,100	Lbs in	16,632	Gals	Open - Wasatch
8196' - 8199' }						Open - Wasatch
8522' - 8525' }						Open - Wasatch
8805' - 8809' }	Frac w/	152,600	Lbs in	82,908	Gals	Open - Mesa Verde
8825' - 8833' }						Open - Mesa Verde
8983' - 8987' }						Open - Mesa Verde
9215' - 9219' }	Frac w/	27,712	Lbs in	28,560	Gals	Open - Mesa Verde
9482' - 9486' }						Open - Mesa Verde
9638' - 9642' }	Frac w/	53,309	Lbs in	38,430	Gals	Open - L Mesa Verde
9770' - 9774' }						Open - L Mesa Verde
9779' - 9783' }						Open - L Mesa Verde
9802' - 9806' }						Open - L Mesa Verde
10056' - 10059' }	Frac w/	33,204	Lbs in	29,652	Gals	Open - L Mesa Verde
10123' - 10126' }						Open - L Mesa Verde
10251' - 10254' }						Open - L Mesa Verde
10425' - 10431' }	Frac w/	66,694	Lbs in	51,114	Gals	Open - L Mesa Verde
10490' - 10492' }						Open - L Mesa Verde
10602' - 10606' }						Open - L Mesa Verde
10676' - 10680' }						Open - L Mesa Verde
10882' - 10886' }	Frac w/	40,048	Lbs in	34,818	Gals	Open - L Mesa Verde
11063' - 11067' }						Open - L Mesa Verde
11112' - 11116' }						Open - L Mesa Verde

CONFIDENTIAL

FIELD: Glen Bench	GL: 4,955' KBE: 4,970'	Spud Date: 6-12-06 Completion dat 8-11-06
Well: GB 11ML-10-8-22	TD: 11,200' PBD: 11,157'	Current Well Status: Flowing Gas Well
Location - surface: 1949' FSL, 1907' FWL, NENW Sec. 10, T8S, R22E	Reason for Pull/Workover Initial completion	
Location - bottom hole: Same	Deviation: Maximum - 4-3/4 degrees	
API#: 43-047-34691	Utah County, Utah	


Wellbore Schematic

Surface casing
 Size: 9-5/8"
 Weight: 36#
 Grade: J-55
 Set @ 475'
 Cmtd w/ 200 sks
 Hole size: 12-1/4"

EXCLUDED PERFS

Intermediate Casing
 Size: 7"
 Weight: 26#
 Grade: J-55
 Set @ 4525'
 Cmtd w/ 308 sxs
 Hole size: 8-3/4"

Production Casing
 Size: 4-1/2"
 Weight: 11.6#
 Grade: P-110
 Set @ 11,200'
 Cmtd w/ 1244 sks
 Hole size: 7-7/8"

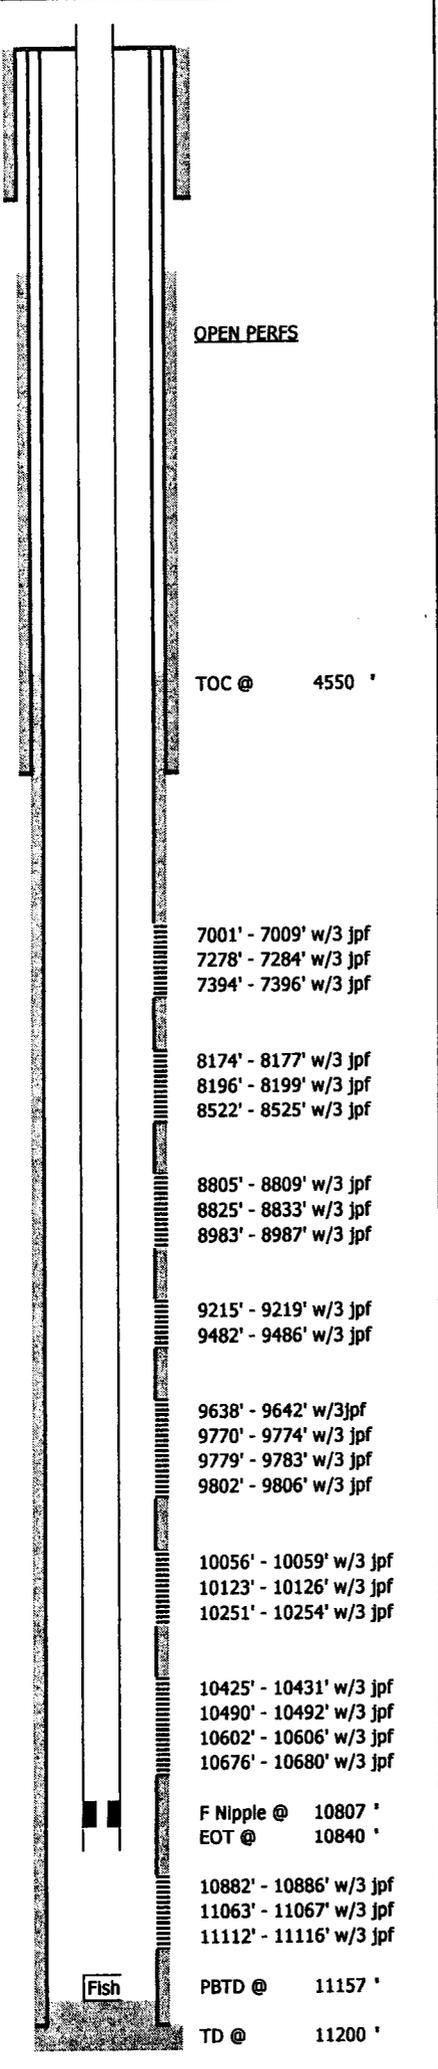

OPEN PERFS

TOC @ 4550'

7001' - 7009' w/3 jpf
 7278' - 7284' w/3 jpf
 7394' - 7396' w/3 jpf

8174' - 8177' w/3 jpf
 8196' - 8199' w/3 jpf
 8522' - 8525' w/3 jpf

8805' - 8809' w/3 jpf
 8825' - 8833' w/3 jpf
 8983' - 8987' w/3 jpf

9215' - 9219' w/3 jpf
 9482' - 9486' w/3 jpf

9638' - 9642' w/3jpf
 9770' - 9774' w/3 jpf
 9779' - 9783' w/3 jpf
 9802' - 9806' w/3 jpf

10056' - 10059' w/3 jpf
 10123' - 10126' w/3 jpf
 10251' - 10254' w/3 jpf

10425' - 10431' w/3 jpf
 10490' - 10492' w/3 jpf
 10602' - 10606' w/3 jpf
 10676' - 10680' w/3 jpf

F Nipple @ 10807'
 EOT @ 10840'

10882' - 10886' w/3 jpf
 11063' - 11067' w/3 jpf
 11112' - 11116' w/3 jpf

PBD @ 11157'
 TD @ 11200'

Tubing Landing Detail:

Description	Size	Footage	Depth
KB		15.00	15.00
Hanger		0.86	15.86
348 jts.	2-3/8"	10,790.62	10,806.48
F-nipple w/1.81" ID	2-3/8"	0.86	10,807.34
1 jt.	2-3/8"	31.34	10,838.68
Bit sub w/wireline re-entry guide		0.91	10,839.59
EOT @			10,839.59

Tubing Information:

Condition:
 New: X Used: _____ Rerun: _____
 Grade: N-80
 Weight (#/ft): 4.7#

Wellhead Detail Example: 7-1/16" 3000#
 4-1/16" 10M#

Other:
 Hanger: Yes No

SUMMARY

- Lower Mesa Verde**
 Zone 1 - Interval 10882' - 11116'. Frac w/40,048# 20/40 Econoprop.
 Zone 2 - Interval 10425' - 10680'. Frac w/66,694# 20/40 Econoprop.
 Zone 3 - Interval 10056' - 10059'. Frac w/33,204# 20/40 Econoprop.
 Zone 4 - Interval 9638' - 9806. Frac w/53,509# 20/40 Econoprop.
Mesa Verde
 Zone 5 - Interval 9215' - 9486'. Frac w/27,712# 20/40 Econoprop.
 Zone 6 - Interval 8805' - 8987'. Frac w/152,600# 20/40 Econoprop.
Wasatch
 Zone 7 - Interval 8174' - 8525'. Frac w/31,100# 20/40 white.
 Zone 8 - Interval 7001' - 7396'. Frac w/72,212# 20/40 white.

Note: Fish is 3-7/8" bit & bottom half of pump-off sub. Length - 1.16'

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING
1. DJJ
2. CDW

Change of Operator (Well Sold)

X - Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

1/1/2007

FROM: (Old Operator): N2460-QEP Uinta Basin, Inc. 1050 17th St, Suite 500 Denver, CO 80265 Phone: 1 (303) 672-6900	TO: (New Operator): N5085-Questar E&P Company 1050 17th St, Suite 500 Denver, CO 80265 Phone: 1 (303) 672-6900
---	--

CA No.		Unit:		WHITE RIVER UNIT				
WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
SEE ATTACHED LISTS				*				

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 4/19/2007
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 4/16/2007
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 1/31/2005
- Is the new operator registered in the State of Utah: _____ Business Number: 764611-0143
- (R649-9-2)Waste Management Plan has been received on: IN PLACE
- Inspections of LA PA state/fee well sites complete on: n/a
- Reports current for Production/Disposition & Sundries on: n/a
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 4/23/2007 BIA
- Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 4/23/2007
- Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: _____
- Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: _____

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 4/30/2007 and 5/15/2007
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 4/30/2007 and 5/15/2007
- Bond information entered in RBDMS on: 4/30/2007 and 5/15/2007
- Fee/State wells attached to bond in RBDMS on: 4/30/2007 and 5/15/2007
- Injection Projects to new operator in RBDMS on: 4/30/2007 and 5/15/2007
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: ESB000024
- Indian well(s) covered by Bond Number: 799446
- (R649-3-1) The **NEW** operator of any state/fee well(s) listed covered by Bond Number 965003033
- The **FORMER** operator has requested a release of liability from their bond on: n/a

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **NEW** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: n/a

COMMENTS: THIS IS A COMPANY NAME CHANGE.

SOME WELL NAMES HAVE BEEN CHANGED AS REQUESTED

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity	Lease	Well Type	Status
WHITE RIVER 31-4	WR 31-4	SWSE	04	080S	220E	4304715090	4915	Federal	WS	A
WRU 15-35-8-22	WRU EIH 15-35-8-22	SWSE	35	080S	220E	4304733061	12528	Federal	GW	P
E IRON HORSE 12W-35-8-22	WRU EIH 12W-35-8-22	NWSW	35	080S	220E	4304733393	12528	Federal	GW	P
WRU 13W-3-8-22	WR 13W-3-8-22	SWSW	03	080S	220E	4304733651	13544	Federal	GW	P
GB 6W-9-8-22	OU GB 6W-9-8-22	SENE	09	080S	220E	4304734010	13545	Federal	GW	P
E IRON HORSE 4W-35-8-22	WRU EIH 4W-35-8-22	NWNW	35	080S	220E	4304734042	12528	Federal	GW	P
E IRON HORSE 3W-35-8-22		NENW	35	080S	220E	4304734044	12528	Federal	GW	P
GB 4W-9-8-22	WRU GB 4WRG-9-8-22	NWNW	09	080S	220E	4304734208	4915	Federal	GW	DRL
WRU 13WX-35-8-22	WRU EIH 13WX-35-8-22	SWSW	35	080S	220E	4304734210	12528	Federal	GW	P
WRU EIH 5W-35-8-22	WRU EIH 5W-35-8-22	SWNW	35	080S	220E	4304734572	12528	Federal	GW	P
OU GB 14W-9-8-22	OU GB 14W-9-8-22	SESW	09	080S	220E	4304734649	13545	Federal	GW	P
WRU GB 9MU-9-8-22	WRU GB 9MU-9-8-22	NESE	09	080S	220E	4304734650	13545	Federal	GW	P
OU GB 10W-9-8-22	OU GB 10W-9-8-22	NWSE	09	080S	220E	4304734651	13545	Federal	GW	P
OU GB 12W-9-8-22	OU GB 12W-9-8-22	NWSW	09	080S	220E	4304734652	13712	Federal	GW	S
OU GB 15W-9-8-22	OU GB 15W-9-8-22	SWSE	09	080S	220E	4304734678	13545	Federal	GW	P
OU GB 16W-9-8-22	OU GB 16W-9-8-22	SESE	09	080S	220E	4304734679	13545	Federal	GW	P
WRU EIH 6W-35-8-22	WRU EIH 6W-35-8-22	SENE	35	080S	220E	4304734684	12528	Federal	GW	P
GB 11ML-10-8-22	GB 11ML-10-8-22	NESW	10	080S	220E	4304734691	14818	Federal	GW	P
WRU EIH 11W-35-8-22	WRU EIH 11W-35-8-22	NESW	35	080S	220E	4304734708	12528	Federal	GW	P
WRU GB 5M-9-8-22	WRU GB 5M-9-8-22	SWNW	09	080S	220E	4304734753	13545	Federal	GW	P
OU GB 12W-4-8-22	OU GB 12W-4-8-22	NWSW	04	080S	220E	4304734762	13718	Federal	GW	P
OU GB 12M-10-8-22	OU GB 12M-10-8-22	NWSW	10	080S	220E	4304734769	13864	Federal	GW	P
WRU EIH 14W-26-8-22	WRU EIH 14W-26-8-22	SESW	26	080S	220E	4304734835	12528	Federal	GW	S
WRU EIH 11MU-26-8-22	WRU EIH 11MU-26-8-22	NESW	26	080S	220E	4304734836	12528	Federal	GW	P
WRU EIH 10W-35-8-22	WRU EIH 10W-35-8-22	NWSE	35	080S	220E	4304735046	12528	Federal	GW	P
WRU EIH 9MU-26-8-22	WRU EIH 9MU-26-8-22	NESE	26	080S	220E	4304735047	14003	Federal	GW	P
WRU EIH 15MU-26-8-22	WRU EIH 15MU-26-8-22	SWSE	26	080S	220E	4304735048	12528	Federal	GW	P
WRU EIH 1MU-35-8-22	WRU EIH 1MU-35-8-22	NENE	35	080S	220E	4304735049	12528	Federal	GW	P
WRU EIH 9M-35-8-22	WRU EIH 9M-35-8-22	NESE	35	080S	220E	4304735050	12528	Federal	GW	P
WRU EIH 7MU-35-8-22	WRU EIH 7MU-35-8-22	SWNE	35	080S	220E	4304735051	12528	Federal	GW	P
WRU EIH 1MU-26-8-22	WRU EIH 1MU-26-8-22	NENE	26	080S	220E	4304735118	12528	Federal	GW	P
WRU EIH 7MU-26-8-22	WRU EIH 7MU-26-8-22	SENE	26	080S	220E	4304735119	12528	Federal	GW	P
WRU EIH 10MU-26-8-22	WRU EIH 10MU-26-8-22	NWSE	26	080S	220E	4304735120	12528	Federal	GW	P
WRU EIH 15MU-35-8-22	WRU EIH 15MU-35-8-22	SWSE	35	080S	220E	4304735121	12528	Federal	GW	P
WRU EIH 10ML-23-8-22	WRU EIH 10ML-23-8-22	NWSE	23	080S	220E	4304735187	12528	Federal	GW	P
SG 12MU-23-8-22	SG 12MU-23-8-22	NWSW	23	080S	220E	4304735188	12528	Federal	GW	P
WRU EIH 9ML-23-8-22	WRU EIH 9ML-23-8-22	NESE	23	080S	220E	4304735189	12528	Federal	GW	P
WRU EIH 16MU-26-8-22	WRU EIH 16MU-26-8-22	SESE	26	080S	220E	4304735191	12528	Federal	GW	P
WRU EIH 2MU-26-8-22	WRU EIH 2MU-26-8-22	NWNE	26	080S	220E	4304735192	12528	Federal	GW	P
WRU EIH 8MU-26-8-22	WRU EIH 8MU-26-8-22	SENE	26	080S	220E	4304735193	12528	Federal	GW	P
WRU EIH 16MU-35-8-22	WRU EIH 16MU-35-8-22	SESE	35	080S	220E	4304735194	12528	Federal	GW	P

QEP Uinta Basin (N2460) to QUESTAR E and P (N5085)
WHITE RIVER UNIT

4/30/2007 and 5/15/2007

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity	Lease	Well Type	Status
WRU EIH 8MU-35-8-22	WRU EIH 8MU-35-8-22	SENE	35	080S	220E	4304735195	12528	Federal	GW	P
WRU EIH 13MU-25-8-22	WRU EIH 13MU-25-8-22	SWSW	25	080S	220E	4304735329	12528	Federal	GW	P
WRU EIH 15ML-23-8-22	WRU EIH 15ML-23-8-22	SWSE	23	080S	220E	4304735387	12528	Federal	GW	P
WRU EIH 4MU-25-8-22	WRU EIH 4MU-25-8-22	NWNW	25	080S	220E	4304735388	12528	Federal	GW	P
WRU EIH 3MU-25-8-22	EIH 3MU-25-8-22	NENW	25	080S	220E	4304735389	12528	Federal	GW	P
WRU EIH 12ML-24-8-22	WRU EIH 12ML-24-8-22	NWSW	24	080S	220E	4304735425	12528	Federal	GW	P
WRU EIH 14ML-24-8-22	WRU EIH 14ML-24-8-22	SESW	24	080S	220E	4304735426	12528	Federal	GW	P
WRU EIH 6MU-25-8-22	WRU EIH 6MU-25-8-22	SENW	25	080S	220E	4304735431	12528	Federal	GW	P
WRU EIH 5MU-25-8-22	WRU EIH 5MU-25-8-22	SWNW	25	080S	220E	4304735432	12528	Federal	GW	P
WRU EIH 12MU-25-8-22	WRU EIH 12MU-25-8-22	NWSW	25	080S	220E	4304735601	12528	Federal	GW	P
WRU EIH 14MU-35-8-22	WRU EIH 14MU-35-8-22	SESW	35	080S	220E	4304735667	12528	Federal	GW	P
WRU EIH 13ML-24-8-22	WRU EIH 13ML-24-8-22	SESW	24	080S	220E	4304735793	12528	Federal	GW	P
WRU EIH 16ML-23-8-22	WRU EIH 16ML-23-8-22	SWSE	23	080S	220E	4304735804	12528	Federal	GW	P
WRU EIH 11ML-24-8-22	WRU EIH 11ML-24-8-22	NWSW	24	080S	220E	4304735805	12528	Federal	GW	P
WRU EIH 6B-ML-35-8-22	WRU EIH 6B-ML-35-8-22	SWNW	35	080S	220E	4304737299	12528	Federal	GW	P
WRU EIH 6B-ML-35-8-20	WRU EIH 6B-ML-35-8-21	SWNW	35	080S	220E	4304737299	15281 12528	Federal	GW	S
WRU EIH 11BML-35-8-22	WRU EIH 11BML-35-8-22	NESW	35	080S	220E	4304737300	12528	Federal	GW	P
WRU EIH 3D-ML-35-8-22	WRU EIH 3D-ML-35-8-22	SENW	35	080S	220E	4304737465	12528	Federal	GW	P
WRU EIH 7D-ML-35-8-22	WRU EIH 7D-ML-35-8-22	SWNE	35	080S	220E	4304737466	12528	Federal	GW	P
WRU EIH 4AML-25-8-22	WRU EIH 4AD-25-8-22	NWNW	25	080S	220E	4304738636		Federal	GW	APD
WRU EIH 7AML-26-8-22	WRU EIH 7AD-26-8-22	SWNE	26	080S	220E	4304738637		Federal	GW	APD
WRU EIH 8DML-26-8-22	WRU EIH 8DML-26-8-22	SENE	26	080S	220E	4304738638		Federal	GW	APD
WRU EIH 9DML-26-8-22	WRU EIH 9DML-26-8-22	NESE	26	080S	220E	4304738639		Federal	GW	APD
WRU EIH 6DML-35-8-22	WRU EIH 6DD-35-8-22	SENW	35	080S	220E	4304738640		Federal	GW	APD
WRU EIH 7AD-35-8-22	WRU EIH 7AD-35-8-22	SWNE	35	080S	220E	4304738641		Federal	GW	APD
WRU EIH 13AML-35-8-22	WRU EIH 14BD-35-8-22	SWSW	35	080S	220E	4304738642		Federal	GW	APD
WRU EIH 2AML-35-8-22	WRU EIH 2AML-35-8-22	NWNE	35	080S	220E	4304738643		Federal	GW	APD
WRU EIH 3AD-35-8-22	WRU EIH 3AD-35-8-22	NENW	35	080S	220E	4304738644		Federal	GW	APD
WRU EIH 10AML-26-8-22	WRU EIH 10AML-26-8-22	NWSE	26	080S	220E	4304738647		Federal	GW	APD
WRU EIH 14AML-26-8-22	WRU EIH 14AML-26-8-22	SESW	26	080S	220E	4304738648		Federal	GW	APD
WRU EIH 9CML-26-8-22	WRU EIH 9CD-26-8-22	NESE	26	080S	220E	4304738649		Federal	GW	APD
WRU EIH 6BML-25-8-22	WRU EIH 6BML-25-8-22	SENW	25	080S	220E	4304738650		Federal	GW	APD
WRU EIH 15AG-35-8-22	WRU EIH 15AG-35-8-22	SWSE	35	080S	220E	4304738772		Federal	OW	APD
WRU EIH 15AML-35-8-22	WRU EIH 15AD-35-8-22	SWSE	35	080S	220E	4304738773		Federal	GW	APD

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.



1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: see attached
2. NAME OF OPERATOR: QUESTAR EXPLORATION AND PRODUCTION COMPANY		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: see attached
3. ADDRESS OF OPERATOR: 1050 17th Street Suite 500 City Denver STATE CO ZIP 80265		7. UNIT or CA AGREEMENT NAME: see attached
4. LOCATION OF WELL FOOTAGES AT SURFACE: attached		8. WELL NAME and NUMBER: see attached
PHONE NUMBER: (303) 308-3068		9. API NUMBER: attached
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		10. FIELD AND POOL, OR WILDCAT:
COUNTY: Uintah		STATE: UTAH


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: <u>1/1/2007</u>	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Operator Name Change</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Effective January 1, 2007 operator of record, QEP Uinta Basin, Inc., will hereafter be known as QUESTAR EXPLORATION AND PRODUCTION COMPANY. This name change involves only an internal corporate name change and no third party change of operator is involved. The same employees will continue to be responsible for operations of the properties described on the attached list. All operations will continue to be covered by bond numbers:
Federal Bond Number: 965002976 (BLM Reference No. ESB000024)
Utah State Bond Number: 965003033
Fee Land Bond Number: 965003033
Current operator of record, QEP UINTA BASIN, INC., hereby resigns as operator of the properties as described on the attached list.

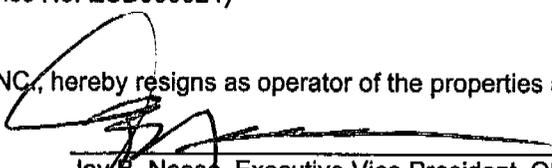
Jay B. Neese, Executive Vice President, QEP Uinta Basin, Inc.
Successor operator of record, QUESTAR EXPLORATION AND PRODUCTION COMPANY, hereby assumes all rights, duties and obligations as operator of the properties as described on the attached list

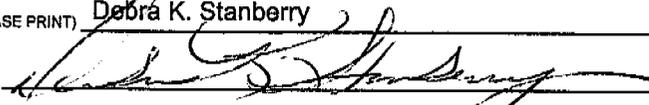Jay B. Neese, Executive Vice President
Questar Exploration and Production Company

NAME (PLEASE PRINT) Debra K. Stanberry TITLE Supervisor, Regulatory Affairs
SIGNATURE  DATE 3/16/2007

(This space for State use only)

RECEIVED
APR 19 2007

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: see attached
2. NAME OF OPERATOR: QUESTAR EXPLORATION AND PRODUCTION COMPANY		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: see attached
3. ADDRESS OF OPERATOR 1050 17th Street Suite 500 Denver STATE CO ZIP 80265		7. UNIT or CA AGREEMENT NAME: see attached
4. LOCATION OF WELL FOOTAGES AT SURFACE: attached		8. WELL NAME and NUMBER: see attached
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		9. API NUMBER: attached
COUNTY: Uintah		10. FIELD AND POOL, OR WILDCAT:
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: <u>1/1/2007</u>	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Well Name Changes</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

PER THE ATTACHED LIST OF WELLS, QUESTAR EXPLORATION AND PRODUCTION COMPANY REQUESTS THAT THE INDIVIDUAL WELL NAMES BE UPDATED IN YOUR RECORDS.

NAME (PLEASE PRINT) <u>Debra K. Stanberry</u>	TITLE <u>Supervisor, Regulatory Affairs</u>
SIGNATURE	DATE <u>4/17/2007</u>

(This space for State use only)

RECEIVED
APR 19 2007
DIV. OF OIL, GAS & MINING



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155



IN REPLY REFER TO
3180
UT-922

April 23, 2007

Questar Exploration and Production Company
1050 17th Street, Suite 500
Denver, Colorado 80265

Re: White River Unit
Uintah County, Utah

Gentlemen:

On April 12, 2007, we received an indenture dated April 6, 2007, whereby QEP Uinta Basin, Inc. resigned as Unit Operator and Questar Exploration and Production Company was designated as Successor Unit Operator for the White River Unit, Uintah County, Utah.

This indenture was executed by all required parties and the signatory parties have complied with Sections 5 and 6 of the unit agreement. The instrument is hereby approved effective April 23, 2007. In approving this designation, the Authorized Officer neither warrants nor certifies that the designated party has obtained all required approval that would entitle it to conduct operations under the White River Unit Agreement.

Your nationwide oil and gas bond No. ESB000024 will be used to cover all federal operations within the White River Unit.

It is requested that you notify all interested parties of the change in unit operator. Copies of the approved instruments are being distributed to the appropriate federal offices, with one copy returned herewith.

Sincerely,

/s/ Greg J. Noble

Greg J. Noble
Acting Chief, Branch of Fluid Minerals

Enclosure

bcc: Field Manager - Vernal (w/enclosure)
SITLA
Division of Oil, Gas & Mining
File - White River Unit (w/enclosure)
Agr. Sec. Chron
Reading File
Central Files

UT922:TAThompson:tt:4/23/07

RECEIVED

APR 30 2007

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: See attached
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: See attached
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME: See attached
2. NAME OF OPERATOR: Questar Exploration and Production Company <i>N5085</i>		8. WELL NAME and NUMBER: See attached
3. ADDRESS OF OPERATOR: 1050 17th Street, Suite 500 Denver STATE CO ZIP 80265		9. API NUMBER: Attached
4. LOCATION OF WELL FOOTAGES AT SURFACE: See attached		10. FIELD AND POOL, OR WILDCAT: See attached
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		COUNTY: Attached
		STATE: UTAH

11 CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: <u>6/14/2010</u>	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> PRODUCTION (START/RESUME) <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	<input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> WATER SHUT-OFF <input checked="" type="checkbox"/> OTHER: <u>Operator Name Change</u>
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____			

12 DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Effective June 14, 2010 Questar Exploration and Production Company changed its name to QEP Energy Company. This name change involves only an internal corporate name change and no third party change of operator is involved. The same employees will continue to be responsible for operations of the properties described on the attached list. All operations will continue to be covered by bond numbers:
 Federal Bond Number: 965002976 (BLM Reference No. ESB000024) *N3700*
 Utah State Bond Number: ~~965003033~~
 Fee Land Bond Number: ~~965003033~~ } *965010695*
 BIA Bond Number: ~~799446~~ } *965010693*

The attached document is an all inclusive list of the wells operated by Questar Exploration and Production Company. As of June 14, 2010 QEP Energy Company assumes all rights, duties and obligations as operator of the properties as described on the list

NAME (PLEASE PRINT) <u>Morgan Anderson</u>	TITLE <u>Regulatory Affairs Analyst</u>
SIGNATURE <i>Morgan Anderson</i>	DATE <u>6/23/2010</u>

(This space for State use only)

RECEIVED
JUN 28 2010

DIV. OF OIL, GAS & MINING

(See Instructions on Reverse Side)

APPROVED 6/13/2009
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

Questar Exploration Production Company (N5085) to QEP Energy Company (N3700)
WHITE RIVER
effective June 14, 2010

well_name	sec	tpw	rng	api	entity	mineral lease	type	stat	C
WR 16-9	09	080S	220E	4304715081	4915	Federal	OW	S	
WRU EIH 15-35-8-22	35	080S	220E	4304733061	12528	Federal	GW	P	
WRU EIH 12W-35-8-22	35	080S	220E	4304733393	12528	Federal	GW	P	
WR 13W-3-8-22	03	080S	220E	4304733651	13544	Federal	GW	P	
OU GB 6W-9-8-22	09	080S	220E	4304734010	13545	Federal	GW	P	
WRU EIH 4W-35-8-22	35	080S	220E	4304734042	12528	Federal	GW	P	
WRU EIH 3W-35-8-22	35	080S	220E	4304734044	12528	Federal	GW	P	
WRU GB 4WRG-9-8-22	09	080S	220E	4304734208	4915	Federal	OW	P	
WRU EIH 13WX-35-8-22	35	080S	220E	4304734210	12528 13456	Federal	GW	P	
WRU EIH 5W-35-8-22	35	080S	220E	4304734572	12528	Federal	GW	P	
OU GB 14W-9-8-22	09	080S	220E	4304734649	13545	Federal	GW	P	
WRU GB 9MU-9-8-22	09	080S	220E	4304734650	13545	Federal	GW	P	
OU GB 10W-9-8-22	09	080S	220E	4304734651	13545	Federal	GW	P	
OU GB 15W-9-8-22	09	080S	220E	4304734678	13545	Federal	GW	P	
OU GB 16W-9-8-22	09	080S	220E	4304734679	13545	Federal	GW	P	
WRU EIH 6W-35-8-22	35	080S	220E	4304734684	12528 16723	Federal	GW	P	
GB 11ML-10-8-22	10	080S	220E	4304734691	14818	Federal	GW	P	
WRU EIH 11W-35-8-22	35	080S	220E	4304734708	12528	Federal	GW	P	
WRU GB 5M-9-8-22	09	080S	220E	4304734753	13545 14447	Federal	GW	S	
OU GB 12W-4-8-22	04	080S	220E	4304734762	13718	Federal	GW	P	
OU GB 12M-10-8-22	10	080S	220E	4304734769	13545	Federal	GW	P	
WRU EIH 14W-26-8-22	26	080S	220E	4304734835	12528	Federal	GW	TA	
WRU EIH 11MU-26-8-22	26	080S	220E	4304734836	12528 13713	Federal	GW	P	
WRU EIH 10W-35-8-22	35	080S	220E	4304735046	12528 15700	Federal	GW	P	
WRU EIH 9MU-26-8-22	26	080S	220E	4304735047	12528 14003	Federal	GW	P	
WRU EIH 15MU-26-8-22	26	080S	220E	4304735048	12528	Federal	GW	P	
WRU EIH 1MU-35-8-22	35	080S	220E	4304735049	12528	Federal	GW	P	
WRU EIH 9M-35-8-22	35	080S	220E	4304735050	12528 14005	Federal	GW	P	
WRU EIH 7MU-35-8-22	35	080S	220E	4304735051	12528 14106	Federal	GW	P	
WRU EIH 1MU-26-8-22	26	080S	220E	4304735118	12528 14349	Federal	GW	P	
WRU EIH 7MU-26-8-22	26	080S	220E	4304735119	12528 14102	Federal	GW	P	
WRU EIH 10MU-26-8-22	26	080S	220E	4304735120	12528 14107	Federal	GW	P	
WRU EIH 15MU-35-8-22	35	080S	220E	4304735121	12528 14197	Federal	GW	P	
WRU EIH 10ML-23-8-22	23	080S	220E	4304735187	12528 14503	Federal	GW	P	
WRU EIH 9ML-23-8-22	23	080S	220E	4304735189	12528 14504	Federal	GW	S	

Bonds: BLM = ESB000024
BIA = 956010693
State = 965010695

Questar Exploration Production Company (N5085) to QEP Energy Company (N3700)
 WHITE RIVER
 effective June 14, 2010

well_name	sec	twp	rng	api	entity	mineral lease	type	stat	C
WRU EIH 16MU-26-8-22	26	080S	220E	4304735191	12528	Federal	GW	P	
					14351				
WRU EIH 2MU-26-8-22	26	080S	220E	4304735192	12528	Federal	GW	P	
					14104				
WRU EIH 8MU-26-8-22	26	080S	220E	4304735193	12528	Federal	GW	P	
					14234				
WRU EIH 16MU-35-8-22	35	080S	220E	4304735194	12528	Federal	GW	P	
					14198				
WRU EIH 8MU-35-8-22	35	080S	220E	4304735195	12528	Federal	GW	P	
					17329				
WRU EIH 13MU-25-8-22	25	080S	220E	4304735329	12528	Federal	GW	P	
					14168				
WRU EIH 15ML-23-8-22	23	080S	220E	4304735387	12528	Federal	GW	S	
					14681				
WRU EIH 4MU-25-8-22	25	080S	220E	4304735388	12528	Federal	GW	P	
					14339				
WRU EIH 3MU-25-8-22	25	080S	220E	4304735389	12528	Federal	GW	P	
					14341				
WRU EIH 12ML-24-8-22	24	080S	220E	4304735425	12528	Federal	GW	P	
					14536				
WRU EIH 14ML-24-8-22	24	080S	220E	4304735426	12528	Federal	GW	P	
					14646				
WRU EIH 6MU-25-8-22	25	080S	220E	4304735431	12528	Federal	GW	P	
					14379				
WRU EIH 5MU-25-8-22	25	080S	220E	4304735432	12528	Federal	GW	P	
					14240				
WRU EIH 12MU-25-8-22	25	080S	220E	4304735601	12528	Federal	GW	P	
					14214				
WRU EIH 14MU-35-8-22	35	080S	220E	4304735667	12528	Federal	GW	P	
					14615				
WRU EIH 13ML-24-8-22	24	080S	220E	4304735793	12528	Federal	GW	S	
					14644				
WRU EIH 16ML-23-8-22	23	080S	220E	4304735804	12528	Federal	GW	P	
					14683				
WRU EIH 11ML-24-8-22	24	080S	220E	4304735805	12528	Federal	GW	P	
					14540				
WRU EIH 6B-ML-35-8-22	35	080S	220E	4304737299	12528	Federal	GW	P	
					15281				
WRU EIH 11BML-35-8-22	35	080S	220E	4304737300	12528	Federal	GW	P	
					15282				
WRU EIH 3D-ML-35-8-22	35	080S	220E	4304737465	12528	Federal	GW	P	
					15552				
WRU EIH 7D-ML-35-8-22	35	080S	220E	4304737466	12528	Federal	GW	P	
					15637				
WRU EIH 4AD-25-8-22	25	080S	220E	4304738636	12528	Federal	GW	P	
					16651				
WRU EIH 7AD-26-8-22	26	080S	220E	4304738637	12528	Federal	GW	P	
					16579				
WRU EIH 6DD-35-8-22	35	080S	220E	4304738640	12528	Federal	GW	P	
					16511				

Bonds: BLM = ESB000024
 BIA = 956010693
 State = 965010695

Questar Exploration Production Company (N5085) to QEP Energy Company (N3700)
WHITE RIVER
 effective June 14, 2010

well_name	sec	twp	rng	api	entity	mineral lease	type	stat	C
WRU EIH 7AD-35-8-22	35	080S	220E	4304738641	16180	Federal	GW	P	
WRU EIH 14BD-35-8-22	35	080S	220E	4304738642	17143	Federal	GW	OPS	C
WRU EIH 9CD-26-8-22	26	080S	220E	4304738649	12528 16446	Federal	GW	P	
GB 1M-4-8-22R (RIGSKID)	04	080S	220E	4304738990	15879	Federal	GW	P	
WRU EIH 6D-5-8-23	05	080S	230E	4304738994	16415	Federal	GW	P	
WRU GB 13G-3-8-22	03	080S	220E	4304739792	4915	Federal	OW	P	
WRU GB 14G-4-8-22	04	080S	220E	4304740097	4915	Federal	OW	P	
GB 3D-4-8-22R(RIGSKID)	04	080S	220E	4304740345	17099	Federal	GW	P	



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office

P.O. Box 45155

Salt Lake City, UT 84145-0155

<http://www.blm.gov/ut/st/en.html>



IN REPLY REFER TO:
3100
(UT-922)

JUL 28 2010

Memorandum

To: Vernal Field Office, Price Field Office, Moab Field Office

From: Chief, Branch of Minerals

Roger L. Bankert

Subject: Name Change Recognized

Attached is a copy of the Certificate of Name Change issued by the Texas Secretary of State and a decision letter recognizing the name change from the Eastern States Office. We have updated our records to reflect the name change in the attached list of leases.

The name change from **Questar Exploration and Production Company** into **QEP Energy Company** is effective June 8, 2010.

cc: MMS
UDOGM

RECEIVED

AUG 16 2010

DIV OF OIL, GAS & MINERAL